

FIRE ALARM SUBMITTAL
FOR
INTERIM HOUSING AND NEW ACCESSIBLE
MODULAR RESTROOMS
AT
REDWOOD HIGH SCHOOL
TAMALPAIS UNION HIGH SCHOOL DISTRICT
MAINTENANCE & OPERATIONS



ALLIANCE ENGINEERING CONSULTANTS, INC.
4701 PATRICK HENRY DRIVE, BLDG 10
SANTA CLARA, CA 95054

MARCH 2018
(162-18-01)

NFS-640

Intelligent Addressable Fire Alarm System



Intelligent Fire Alarm Control Panels

General

The NFS-640 intelligent Fire Alarm Control Panel is part of the ONYX® Series of Fire Alarm Controls from NOTIFIER.

As a stand-alone small-to-large system, or as a large network, the ONYX® Series of products meets virtually every application requirement.

Designed with modularity and for ease of system planning, the NFS-640 can be configured with just a few devices for small building applications, or for a large campus or high-rise application. Simply add additional peripheral equipment to suit the application.

Features

- One, expandable to two, isolated intelligent Signaling Line Circuit (SLC) Style 4, 6 or 7.
- Up to 159 detectors (any mix of ion, photo, thermal, or multi-sensor) and 159 modules (N.O. manual stations, two-wire smoke, notification, or relay) per SLC. 318 devices per loop/636 per FACP or network node.
- Standard 80-character display, 640-character large display, or display-less (a node on a network).
- Network option – 103 nodes supported (NFS-640, NCA Network Annunciator, or NCS Network Control Station) using wire or fiber-optic connections.
- 6.0 amp switch mode power supply with four Class A/B built-in Notification Appliance Circuits (NAC). Selectable System Sensor strobe synchronization.
- Built-in Alarm, Trouble, and Supervisory relays.
- Up to 64 output circuits per FACP or network node; circuits configurable online.
- **VeriFire® Tools** offline program option. Sort Maintenance Reports by compensation value (dirty detector), peak alarm value, or address.
- Autoprogramming and Walk Test reports.
- Optional universal 636-point DACT.
- 80-character remote annunciators (up to 32).
- EIA-485 annunciators, including custom graphics.
- Printer interface (80-column and 40-column printers).
- History file with 800-event capacity in nonvolatile memory, plus separate 200-event alarm-only file.
- Alarm Verification selection per point, with tally.
- Autoprogramming and Walk Test reports.
- Positive Alarm Sequence (PAS) Presignal.
- Silence inhibit and Auto Silence timer options.
- March time / temporal / California two-stage coding / strobe synchronization.
- Field-programmable on panel or on PC, with **VeriFire® Tools** program check, compare, simulate.
- Full QWERTY keypad.
- Charger for up to 90 hours of standby power.
- Non-alarm points for lower priority functions.
- Remote ACK/Signal Silence/System Reset/Drill via monitor modules.
- Automatic time control functions, with holiday exceptions.
- Surface Mount Technology (SMT) electronics.
- Extensive, built-in transient protection.



**NFS-640 shown in CAB-B4 with
NCA 640-character display.**

- Powerful Boolean logic equations.

NCA 640-CHARACTER DISPLAY FEATURES:

- Backlit, 640-character display.
- Supports SCS Series smoke control system in both HVAC or FSCS modes (not UL-Listed for FSCS).
- Printer and CRT EIA-232 ports.
- EIA-485 annunciator and terminal mode ports.
- Alarm, Trouble, Supervisory, and Security relays.

FLASHSCAN® INTELLIGENT FEATURES:

- Poll 318 devices in less than two seconds.
- Activate up to 159 outputs in less than five seconds.
- Multicolor LEDs blink device address during Walk Test.
- Fully digital, high-precision protocol (U.S. Patent 5,539,389).
- Manual sensitivity adjustment — nine levels.
- Pre-alarm intelligent sensing — nine levels.
- Day/Night automatic sensitivity adjustment.
- Sensitivity windows:
 - **Ion** – 0.5 to 2.5%/foot obscuration.
 - **Photo** – 0.5 to 2.35%/foot obscuration.
 - **Laser (VIEW®)** – 0.02 to 2.0%/foot obscuration.
 - **Acclimate Plus™** – 0.5 to 4.0%/foot obscuration.
 - **HARSH™** – 0.5 to 2.35%/foot obscuration.
- Drift compensation (U.S. Patent 5,764,142).
- Degraded mode — in the unlikely event that the CPU-640 microprocessor fails, FlashScan® detectors revert to degraded operation and can activate the CPU-640 NAC circuits and alarm relay. Each of the four built-in panel circuits includes a Disable/Enable switch for this feature.

- Multi-detector algorithm involves nearby detectors in alarm decision (U.S. Patent 5,627,515).
- Automatic detector sensitivity testing.
- Maintenance alert (two levels).
- Self-optimizing pre-alarm.

VIEW® (VERY INTELLIGENT EARLY WARNING) SMOKE DETECTION TECHNOLOGY:

- Revolutionary spot laser design.
- Advanced intelligent sensing algorithms differentiate between smoke and non-smoke signals (U.S. Patent 5,831,524).
- Addressable operation pinpoints the fire location.
- No moving parts to fail or filters to change.
- Early warning performance comparable to the best aspiration systems at a fraction of the lifetime cost.

ACCLIMATE PLUS™

LOW-PROFILE INTELLIGENT MULTI-SENSOR:

- Detector automatically adjusts sensitivity levels without operator intervention or programming. Sensitivity increases with heat.
- Microprocessor-based technology; combination photo and thermal technology.
- FlashScan® or classic mode compatible with NFS-640.
- Low-temperature warning signal at 40°F ± 5°F (4.44°C ± 2.77°C).

HARSH™ HOSTILE-AREA SMOKE HEAD:

- Provides early warning of smoke detection in environment where traditional smoke detectors are not practical.
- The detector's filters remove particulates down to 30 microns in size.
- Intake fan draws air into photo chamber, while airborne particles and water mist are removed.

- Requires auxiliary 24 VDC from system or remote power supply.

RELEASING FEATURES:

- Ten independent hazards.
- Sophisticated cross-zone (three options).
- Delay timer and Discharge timers (adjustable).
- Abort (four options).
- Low-pressure CO₂ listed.

VOICE AND TELEPHONE FEATURES:

- Solid state message generation.
- Hard-wired voice control module options.
- Firefighter telephone option.
- 30- to 120-watt high-efficiency amplifiers (AA Series).
- Backup tone generator and amplifier option.
- Multichannel voice transponder (XPIQ).


HIGH-EFFICIENCY OFFLINE SWITCHING 3.0 AMP POWER SUPPLY (6.0 A IN ALARM):

- 120 or 220/240 VAC.
- Displays battery current/voltage on panel (with display).

FlashScan® Exclusive World-Leading Detector Protocol

At the heart of the NFS-640 is a set of detection devices and device protocol — FlashScan® (U.S. Patent 5,539,389). FlashScan® is an all-digital protocol that gives superior precision and high noise immunity.

In addition to providing quick identification of an active input device, this protocol can also activate many output devices in a fraction of the time required by competitive protocols. This high

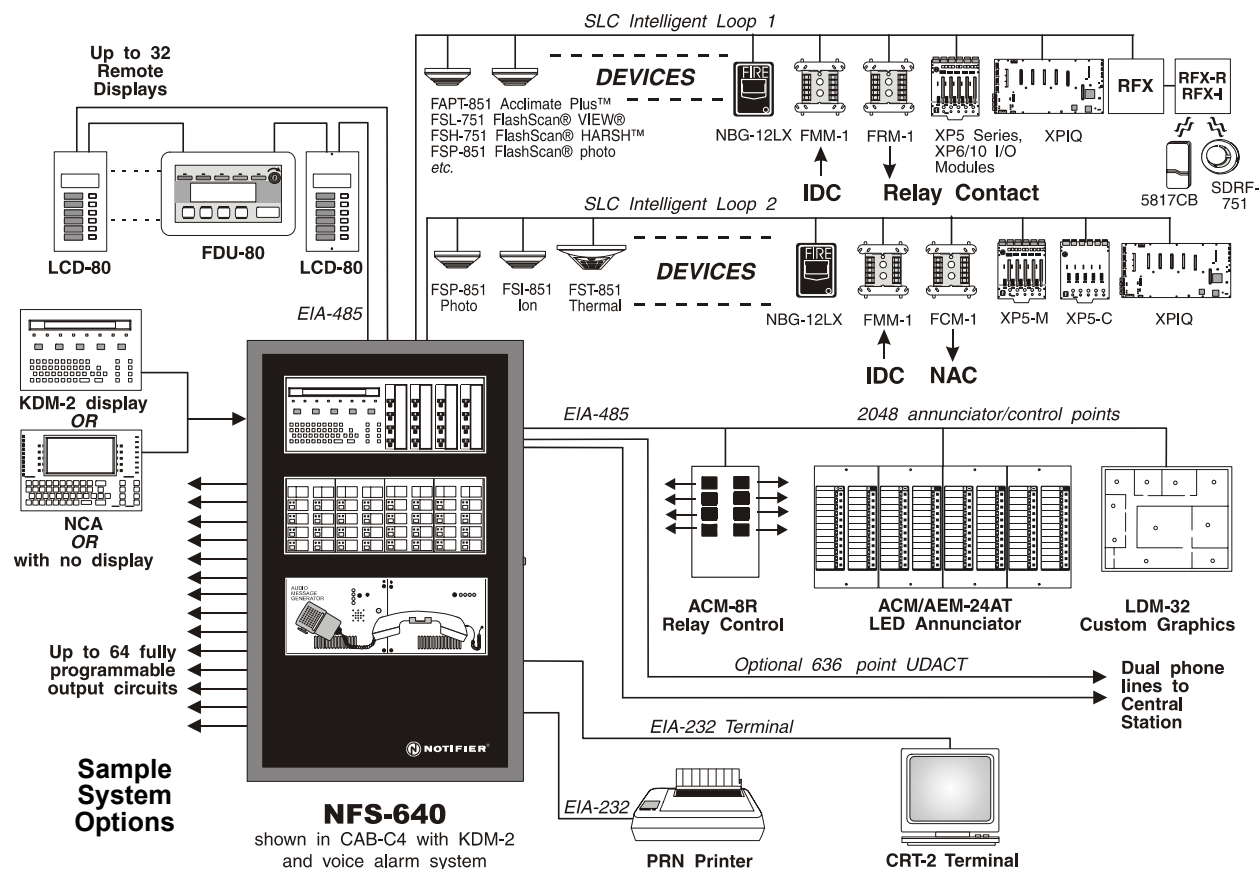

speed also allows the NFS-640 to have the largest device per loop capacity in the industry — 318 points — yet every input and output device is sampled in less than two seconds. The micro-processor-based FlashScan® detectors have bicolor LEDs that can be coded to provide diagnostic information, such as device address during Walk Test.

Intelligent Sensing

Intelligent sensing is a set of software algorithms that provide the NFS-640 with industry-leading smoke detection capability. These complex algorithms require many calculations on each reading of each detector, and are made possible by the very-high-speed microcomputer used by the NFS-640.

Drift Compensation and Smoothing: Drift compensation allows the detector to retain its original ability to detect actual smoke, and resist false alarms, even as dirt accumulates. It reduces maintenance requirements by allowing the system to automatically perform the periodic sensitivity measurements required by NFPA 72. Smoothing filters are also provided by software to remove transient noise signals, such as those caused by electrical interference.

Maintenance Warnings: When the drift compensation performed for a detector reaches a certain level, the performance of the detector may be compromised, and special warnings are given. There are three warning levels: (1) Low Chamber value, usually indicative of a hardware problem in the detector; (2) Maintenance Alert, indicative of dust accumulation that is near but below the allowed limit; (3) Maintenance Urgent, indicative of dust accumulation above the allowed limit.

Sensitivity Adjust: Nine sensitivity levels are provided for alarm detection. These levels can be set manually, or can change automatically between day and night. Nine levels of pre-alarm sensitivity can also be selected, based on predetermined levels of alarm. Pre-alarm operation can be latching or self-restoring, and can be used to activate special control functions.

Self-Optimizing Pre-Alarm: Each detector may be set for "Self-Optimizing" pre-alarm. In this special mode, the detector "learns" its normal environment, measuring the peak analog readings over a long period of time, and setting the pre-alarm level just above these normal peaks.

Cooperating Multi-Detector Sensing: A patented feature of this intelligent sensing is the ability of a smoke sensor to consider readings from nearby sensors in making alarm or pre-alarm decisions. Without statistical sacrifice in the ability to resist false alarms, it allows a sensor to increase its sensitivity to actual smoke by a factor of almost two to one.

Field Programming Options

Autoprogram is a timesaving feature of the NFS-640. It is a special software routine that allows the NFS-640 to "learn" what devices are physically connected and automatically load them in the program with default values for all parameters. Requiring less than one minute to run, this routine allows the user to have almost immediate fire protection in a new installation, even if only a portion of the detectors are installed.

Keypad Program Edit (with KDM-2) The NFS-640, like all NOTIFIER intelligent panels, has the exclusive feature of program creation and editing capability from the front panel keypad, **while continuing to provide fire protection**. The architecture of the NFS-640 software is such that each point entry carries its own program, including control-by-event links to other points. This allows the program to be entered with independent per-point segments, while the NFS-640 simultaneously monitors other (already installed) points for alarm conditions.

VeriFire® Tools is an offline programming and test utility that can greatly reduce installation programming time, and increase confidence in the site-specific software. It is Windows® based and provides technologically advanced capabilities to aid the

installer. The installer may create the entire program for the NFS-640 in the comfort of the office, test it, store a backup file, then bring it to the site and download from a laptop into the panel.

ENTER PROG OR STAT PASSWORD, THEN ENTER
<ESCAPE TO ABORT> *****


0=CLR 1= AUTO 2=POINT 3=PASSWORD 4=MESSAGE

Above: Keypad program editing.

Below: Autoprogram function.


AUTOPROGRAM PLEASE WAIT

L1:80 DETS, 15 MODS L2:93 DETS, 35 MODS
PANEL OUTPUTS:24 BELLS: 04

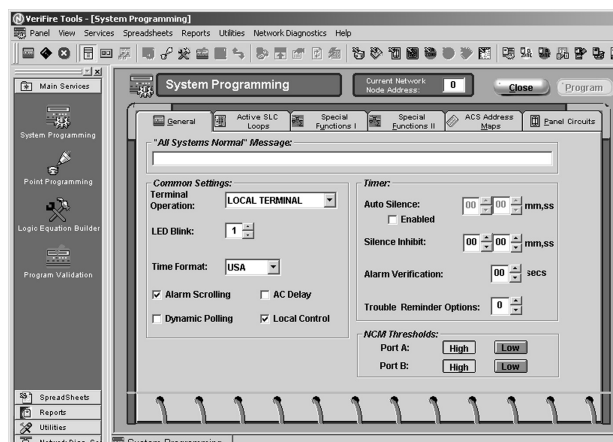


VeriFire Tools System Programming screen

(SLC #1).

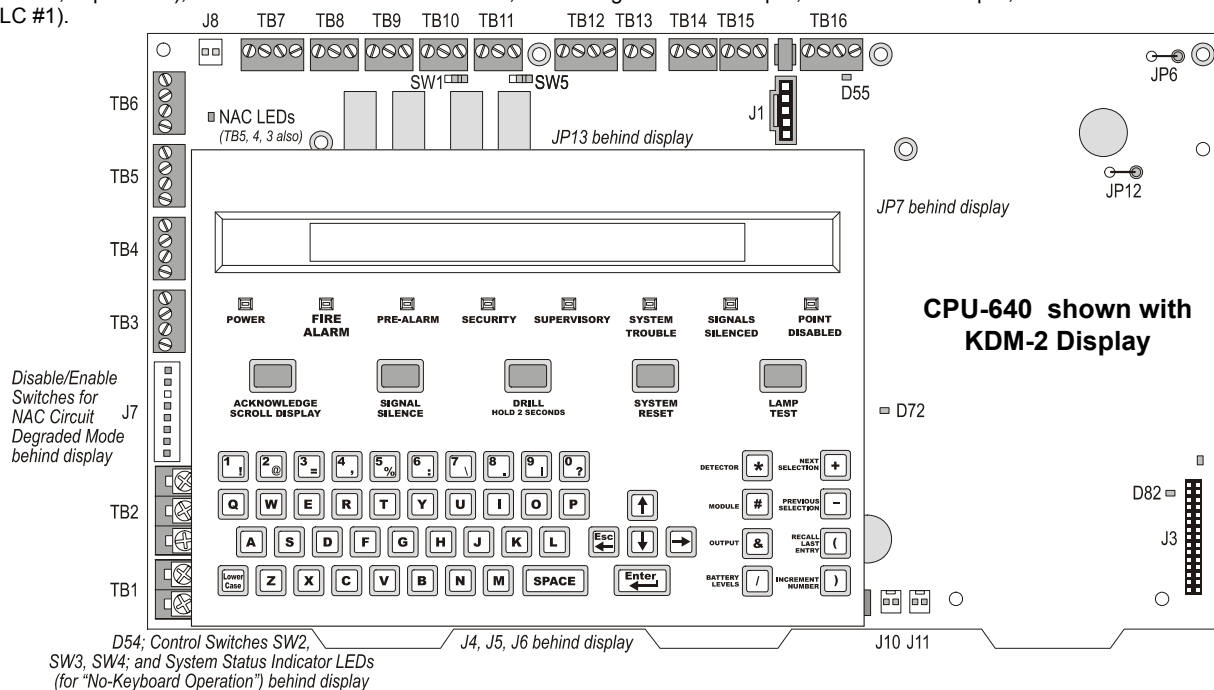

LEFT SIDE, TOP to BOTTOM: TB6 NAC #1, TB5 NAC #2, TB4 NAC #3, TB3 NAC #4 (all NAC circuits power-limited and supervised, and each NAC TB has an NAC LED to the right of it); J7 Accessory Power; Disable/Enable Switches for Degraded Mode; TB2 AC Power Connection; TB1 Battery Connection (overcurrent protected). **BOTTOM, LEFT to RIGHT:** D54 AC On LED; System Status Indicator LEDs for “No-Keyboard Operation”; System Switches SW2 (Acknowledge), SW3 (Silence), SW4 (Reset) for “No-Keyboard Operation”; J4 KDM-2 Connector; J5, J6 Panel Circuits (ONYX® Panel Output Modules, supervised); D72 General Board Ground Fault LED; J10 Security Tamper Switch; J11 Auxiliary Trouble Input; D82 AC Power LED; J3 LEM-320 Connector (SLC Loop #2).

Network Diagram

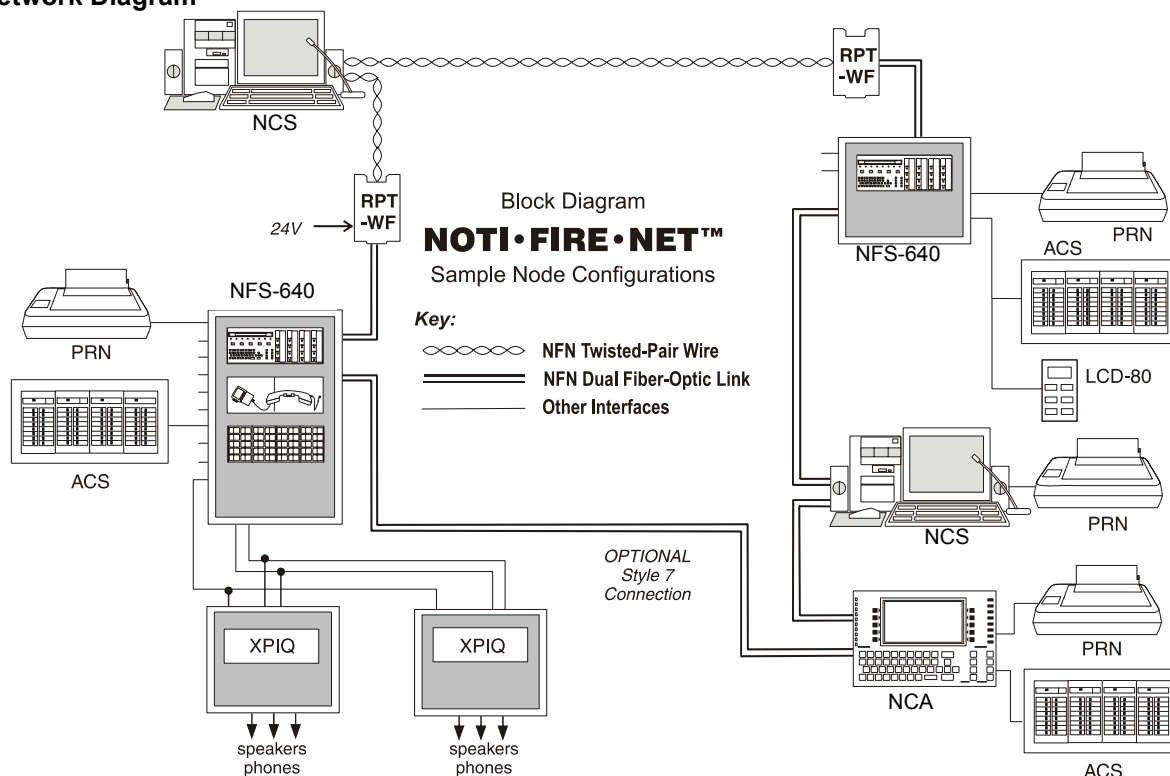

Placement of Equipment in Chassis and Cabinet

The following guidelines outline the NFS-640's flexible system design.

Rows: The first row of equipment in the cabinet mounts in chassis **CHS-M2**. Mount the second, third, or fourth rows of equipment in chassis **CHS-4MB** (see NFS-640 Installation Manual regarding panel output modules) or **CHS-4L** (for voice components, see Voice Alarm System Manual).

Wiring: When designing the cabinet layout, consider separation of power-limited and non-power-limited wiring as discussed in the NFS-640 Installation Manual.

Positions: A chassis offers four basic side-by-side positions for components; the number of modules that can be mounted in each position depends on the chassis model and the size of the individual module. There are a variety of standoffs and hardware items available for different combinations and configurations of components.

It is critical that all mounting holes of the NFS-640 are secured with a screw or standoff to ensure continuity of Earth Ground.

Layers: The CHS-M2 accepts four layers of equipment, including the control panel. The **CPU-640** fills three positions (left to right) in the first-installed layer (the back of the chassis); its integral power supply occupies (the left) two positions in the next two layers; the optional display occupies (the left) two positions at the front, flush with the door. Panel output modules can be mounted in several layers with standoffs or an L-bracket as required. Some equipment, such as the **NCA**, may be door-mounted directly in front of the control panel. The NCA mounts onto the DP-DISP or ADP-4B. The NCA can be used as a primary display for the NFS-640 by directly connecting their network ports (required in Canadian stand-alone applications).

Expansion: Installing an **LEM-320** Loop Expander Module adds a second SLC loop to the control panel. The LEM-320 is mounted onto the CPU-640, occupying the middle-right, second (back) slot on the chassis. If networking two or more control panels, each unit requires a **NCM-W** (wire) or **NCM-F** (fiber) Network Control Module. The NCM-W/F can be installed in any panel output module position (see manual); the default position is at the back of the chassis next to the control panel. **Option boards** can be mounted in front of the LEM-320 or NCM modules; for ease of access, complete installation of those devices before mounting another layer.

KDM-2 Controls and Indicators

Program Keypad: QWERTY type (keyboard layout).

8 LED indicators: Power; Fire Alarm; Pre-Alarm; Security; Supervisory; System Trouble; Signals Silenced; Points Disabled.

Membrane Switch Controls: Acknowledge/Scroll Display; Signal Silence; Drill; System Reset; Lamp Test.

LCD Display: 80 characters (2 x 40) with long-life LED backlight.

Configuration Guidelines


Stand-alone and network systems require a main display. On single-CPU systems (one CPU-640/-640E), display options are the KDM-2 or the NCA. On network systems (two or more CPU-640/-640Es), at least one NCA or NCS annunciation device is required. Other options listed as follows:

KDM-2: 80-character backlit LCD display with QWERTY programming and control keypad. Order two BMP-1 blank modules and DP-DISP mounting plate separately. *Requires top row of a cabinet. Required for each stand-alone 80-character display system. The KDM-2 may mount in network nodes to display "local" node information as long as at least one NCA or NCS network display is on the system to display network information.*

NCA: Network Control Annunciator, 640 characters. On single CPU-640/-640E systems, the NCA is the Primary Display for the panel and connects directly to the CPU-640/-640E. On network systems (two or more CPU-640/-640Es), one network display (either NCA or NCS) is required for every system. On network systems, the NCA connects (and requires) an NCM network communications module. Mounts in a row of FACP node or in two annunciator positions. Mounting options include the DP-DISP, ADP-4B, or in an annunciator box, such as the ABS-2D. In CAB-4 top-row applications, a DP-DISP and two BMP-1 blank modules are required for mounting. *See NCA data sheet DN-6858.*

CPU-640: Central processing unit with integral 3.0 amp (6.0 A in alarm) power supply for an NFS-640 system. Includes CPU; one Signaling Line Circuit expandable to two; installation, programming and operating manuals. *Order one per system or as necessary (up to 103 network nodes) on a network system.*

CPU-640E: Same as CPU-640 but requires 220 VAC, 1.5 amp, (3.0 A in alarm).

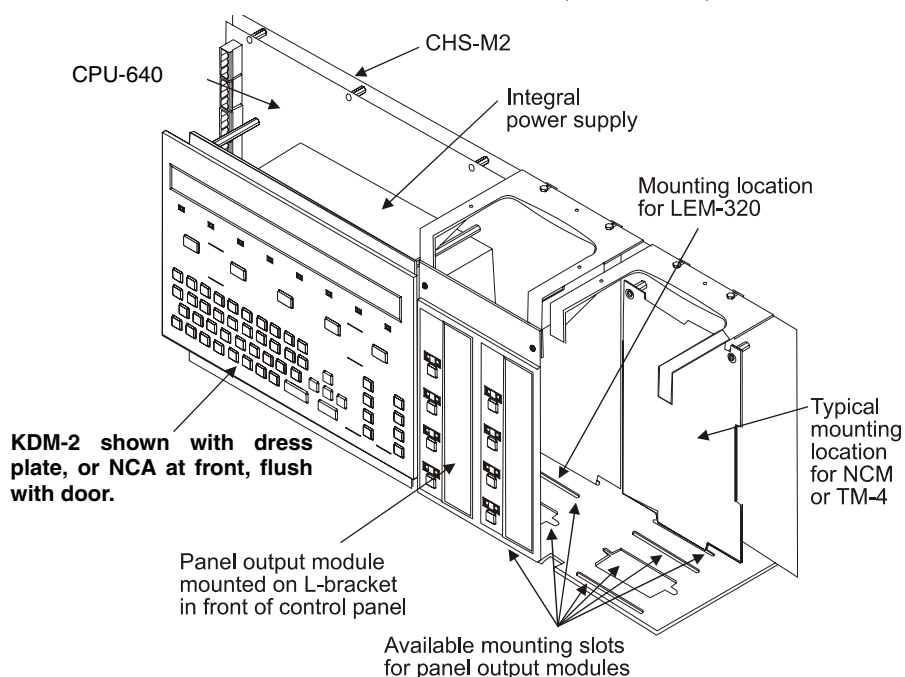

CHS-M2: Mounting chassis for CPU-640. One required for each CPU-640/-640E.

DP-DISP: Dress panel for top row in cabinet with CPU-640/-640E installed.

BMP-1: Blank module for unused module positions.

System Modules

The NFS-640 includes the ability to communicate with up to eight conventional modules each with up to eight circuits. Any mix of notification, relay, speaker, or telephone may be used. Choose any combination of up to eight output modules: ICM/ICE, CRM/CRE, DCM-4 or VCM/VCE. Panel modules mount on either: the two far-right positions of the DP-DISP (next to the primary display); or on any of the four positions on the CHS-4N chassis (CHS-4MN kit required).

NOTES: 1) These modules/expanders are NOT to be used for releasing applications. 2) For additional information on these panel output modules and expanders, see data sheet DN-6859.

CHS-4MB: Expansion Chassis. Mounts up to four modules. Includes CHS-4N, MP-1B (Module Dress Panel), and Expander Ribbon Cable.

ICM-4RK: Notification Appliance Circuit Module, provides four Style Y (Class B) or Style Z (Class A) alarm Notification Appliance Circuits. Maximum signaling current is 3.0 amps per circuit or 6.0 amps per module, subject to power supply limitations (includes auxiliary power harness, ELRs and slide-in labels).

Includes ON/OFF controls and ON/OFF LEDs.

ICE-4: Notification Appliance Circuit Expander, expands ICM-4 to provide a total of eight Style Y or Style Z alarm Notification Appliance Circuits. Circuit ratings are same as ICM-4.

NOTE: Maximum of one per ICM-4RK. May also be used to add four Notification Appliance Circuits to VCM-4.

CRM-4RK: Control Relay Module, four Form-C relay contacts, rated at 5.0 A, 120 VAC or 28 VDC (resistive) per circuit. Includes manual ON/OFF controls and LEDs.

CRE-4: Control Relay Expander, expands CRM-4 to provide a total of eight Form-C relay contacts. Note: maximum of one per CRM-4RK. May also be connected to add four relays to ICM-4, TCM-2, TCM-4, or VCM-4.

VCM-4RK: Voice Control Module provides four Style Y (25 and 70 Vrms) and Style Z (25 Vrms only) speaker circuits, eight manual select switches and indicators, slide-in labels, and plug-in terminal blocks. Move jumper to convert to telephone circuits with remote ring signal and local call-in flash. May be expanded to eight circuits with VCE-4, ICE-4, or CRE-4.

VCE-4: Voice Control Expander adds four circuits to VCM-4. Note: VCM-4/ VCE-4 combination must be eight speaker or eight phone circuits.

DCM-4RK: Dual Channel Module provides four Class B (Style Y, 25 & 70 Vrms) or Class A (Style Z, 25 Vrms only) speaker circuits plus four channel A/B select relays. Not expandable.

OTHER OPTION MODULES

ARM-4: Auxiliary Relay Module, four Form-C relays controlled by a relay module (CRM-4 or CRE-4). N.O. contacts rated 20 amps; N.C. contacts rated 10 amps at 125 VAC and 30 VDC.

NOTE: Maximum of one for each CRM-4 or CRE-4.

VCC-1B: Voice Control Center. Provides a variety of user-selectable tones on a single channel. Up to two different tones or messages may be selected on a single channel. Also provides optional digital voice message capability and on-site programmable voice messages. Includes Audio Message Generator (AMG-1) microphone, cables, dress panels, and instructions.

VTCC-1B: Voice/Telephone Control Center. Provides all that the VCC-1 provides plus two-way Fire Fighters Telephone (FFT-7) capability.

TCC-1B: Telephone Control Center. Provides a stand-alone two-way Fire Fighters telephone (FFT-7S).

Includes cables, dress panel and instructions.

RM-1/RM-1SA: Remote microphone assemblies, mount on ADP-4 (RM-1) dress panel or CAB-RM/-RMR (RM-1SA) stand-alone cabinets. See DN-6728.

AMG-E: Audio Message Generator (without microphone). Order in addition to VCC-1 or VTCC-1 if two-channel system is required.

FFT-7/FFT-7S: Fire Fighters Telephone control with master handset.

FTM-1: Firephone Control Module connects a remote firefighter telephone to a centralized telephone console. Reports status to panel. Wiring to jacks and handsets is supervised.

AA-30: Audio Amplifier, 30 watts. Switch-mode power. Includes amplifier and audio input supervision, backup input, and automatic switchover, power supply, cables. See AA Series data sheet, DN-3224.

AA-120/AA-100: Audio Amplifier provides up to 120 watts of 25 Vrms audio power for the NFS-640. The amplifier contains an integral chassis for mounting to a CAB-B4, -C4, or -D4 backbox (consumes one row). Switch-mode power. Includes audio input and amplified output supervision, backup input, and automatic switchover to backup tone. Order the AA-100 for 70.7 Vrms systems and 100 watts of power. See AA Series data sheet, DN-3224.

VROM-(n): Factory-programmed message for installation in AMG-1. Provides up to 24 seconds of evacuation message on nonvolatile memory chip. Choose one of many standard messages available. Up to two of these messages may be installed in one AMG. Includes VROM, instructions for installation and operation, and written text of message. See VROM data sheet, DN-3576.

VRAM-1: Field-programmed memory to be installed in AMG-1. Provides up to 24 seconds of field-programmable evacuation message on nonvolatile memory chip. Message is programmed from microphone or cassette tape. Up to two of these nonvolatile memory chips may be installed in one AMG. Includes VRAM and instructions for installation and operation.

APS-6R: Auxiliary Power Supply (expander). Provides up to 6.0 amperes of regulated power for compatible Notification appliance circuits. Includes battery input and transfer relay, and over-current protection. Mounts on one of four positions on a CHS-4L or CHS-4 chassis. See APS-6R data sheet, DN-5952.

ACPS-2406: 6.0 amp addressable charger power supply. See ACPS-2406 data sheet, DN-6834.

FCPS-24: The FCPS-24 is a remote six-amp (four-amp continuous) repeater/power supply. See FCPS-24 data sheet, DN-5132.

FCPS-24S6/-24S8: Remote six-amp and eight-amp power supplies with battery charger. See FCPS-24S6/-24S8 datasheet, DN-6927.

UZC-256: Programmable Universal Zone Coder provides positive non-interfering successive zone coding. Microprocessor-controlled, field-programmable from IBM®-compatible PCs (requires optional programming kit). See UZC-256 data sheet, DN-3404.

LCD-80/LCD-80TM/FDU-80: 80-character, backlit LCD display. Mounts up to 6,000 ft. (1828.8 m) from panel. Up to 32 per NFS-640. See LCD-80/-80TM (DN-3198) and FDU-80 (DN-6820) data sheets.

ACS: Annunciator Control Modules ACM-16AT, AEM-16AT, ACM-32A, and AEM-32A. See data sheets, DN-0524 and DN-6862..

AFM: Annunciator Fixed Modules AFM-16A, AFM-16AT, and AFM-32A. *See AFM data sheet, DN-0056.*

LDM: Lamp Driver Modules LDM-32, LDM-E32, and LDM-R32. *See LDM data sheet, DN-0551.*

ACM-8R: Remote Relay Module with eight Form-C contacts. Can be located up to 6,000 ft. (1828.8 m) from panel on four wires. *See ACM-8R data sheet, DN-3558.*

SCS: Smoke control station; eight (expandable to 16) circuits. *See SCS data sheet, DN-4818.*

RPT-485: Repeats EIA-485 over twisted pair or converts to fiber-optic medium. *See RPT data sheet, DN-4737.*

XP5: The XP5-M and XP5-C provide FlashScan® transponder points. *See XP5 data sheet, DN-6625.*

XP: The XP Series Transponder provides conventional monitor and control points (CLIP mode only). *See XP Series data sheet, DN-0759.*

XPIQ: The XPIQ quad intelligent voice transponder for distributed multichannel voice evacuation systems, an integrated audio amplification and distribution subsystem controlled by FACP. Capable of playing up to four simultaneous messages. Accepts up to four 25-watt amplifiers. *See XPIQ data sheet, DN-6823.*

CHS-4: Chassis for mounting up to four APS-6Rs.

CHS-4L: Low-profile four-position Chassis. Mounts two AA-30 amplifiers or one AMG-E and one AA-30.

DP-1B: Blank Dress panel. Provides dead-front panel for unused tiers or to cover AA-30, AA-120, or one AMG-E and one AA-30.

CAB-4 Series: The CAB-4 Series cabinets are fabricated from 16-gauge steel with unique full-front LEXAN®, reverse-silk-screened for durability. The cabinet assembly consists of two basic parts: a Backbox (SBB_4), and a Locking Door (DR_4) that may hinge right or left. Cabinets are available in four sizes, "A" through "D", with one to four tiers. A trim ring option is available for semi-flush mounting. *See CAB-4 Series data sheet, DN-6857.*

CAB-M Series: Marine cabinets required for Lloyd's Register or U.S. Coast Guard listed use. *See DN-5063.*

COMPATIBLE DEVICES, EIA-232 PORTS

PRN-5: 80-column printer. *See DN-6769.*

PRN-6: 80-column printer. *See DN-6956.*

VS4095/S2: Printer, 40-column, 24 V. Mounted in external backbox. *Order from Keltron, Inc. See DN-3260.*

CRT-2: Video display terminal. *See DN-3756.*

COMPATIBLE DEVICES, EIA-485 PORTS

ACS Series: Remote serial annunciator/control systems. *See DN-0524.*

FDU-80: Remote LCD display, 80 characters, with LEDs. *See DN-6820.*

LCD-80: Remote LCD display, 80 characters. *See DN-3198.*

LCD-80TM: Remote LCD display, 80 characters, terminal mode. *See DN-3198.*

LDM Series: Remote custom graphic driver modules. *See DN-0551.*

ACM-8R: Remote relay module. 8 Form-C relays. *See DN-3558.*

RPT-485 Series: Repeater, isolator and/or fiber-optic modem. *See DN-4737.*

UDACT: Universal Digital Alarm Communicator Transmitter, 636 channel. *See DN-4867.*

UZZC-256: Zone Coder. Up to 256 programmable codes. *See DN-3404.*

COMPATIBLE INTELLIGENT DEVICES

BEAMHK: Heating kit for transmitter/receiver unit of FSB-200(S) below. *See DN-6985.*

BEAMHRK: Heating kit for use with the reflector of FSB-200(S) below. *See DN-6985.*

BEAMLRK: Long-range accessory kit, FSB-200(S) below.

BEAMMRK: Multi-mount kit, FSB-200(S) below.

BEAMSMK: Surface-mount kit, FSB-200(S) below.

FSB-200: Intelligent beam smoke detector. *See DN-6985.*

FSB-200S: Intelligent beam smoke detector with integral sensitivity test. *See DN-6895.*

FSI-851: Low-profile FlashScan® ionization detector, will replace FSI-751. *See DN-6934.*

FSI-751: Low-profile FlashScan® ionization detector. *See DN-6714.*

FSP-851: Low-profile FlashScan® photoelectric detector, will replace FSP-751. *See DN-6935.*

FSP-751: Low-profile FlashScan® photoelectric detector. *See DN-6714.*

FSP-851T: Low-profile FlashScan® photoelectric detector with 135°F (57°C) thermal, will replace FSP-751T. *See DN-6935.*

FSP-751T: Low-profile FlashScan® photoelectric detector with 135°F (57°C) thermal. *See DN-6714.*

FST-851: FlashScan® thermal detector 135°F (57°C), will replace FST-751. *See DN-6936.*

FST-751: FlashScan® thermal detector 135°F (57°C). *See DN-6716.*

FST-851R: FlashScan® thermal detector 135°F (57°C) with rate-of-rise, will replace FST-751R. *See DN-6936.*

FST-751R: FlashScan® thermal detector 135°F (57°C) with rate-of-rise. *See DN-6716.*

FST-851H: FlashScan® 190°F (88°C) high-temperature thermal detector. *See DN-6936.*

FSD-751P: FlashScan® photo duct detector with housing. *See DN-6821.*

FSD-751PL: Low-flow FlashScan® photo duct detector with housing, will replace FSD-751P. *See DN-6955.*

FSD-751RP: FlashScan® photo duct detector with relay and housing.

FSD-751RPL: Low-flow FlashScan® photo duct detector with relay and housing, will replace FSD-751RP. *See DN-6955.*

FAPT-851: FlashScan® Acclimate Plus™ low-profile multi-sensor detector, will replace FAPT-751. *See DN-6937.*

FAPT-751: Acclimate Plus™ low-profile multisensor detector. *See DN-6833.*

FSH-751: FlashScan® HARSH™ Hostile Area Smoke Head. *See DN-6875.*

FSL-751: FlashScan® VIEW® laser photo detector, will replace LPX-751. *See DN-6886.*

LPX-751: Low-profile VIEW® laser photo detector. *See DN-5306.*

B224RB: Low-profile relay base.

B224BI: Isolator base for low-profile detectors.

B710LP: Low-profile base. Standard U.S. style.

B501: European-style, 4" (10.16 cm) base.

B501BH: Sounder base, includes B501 base above. Constant tone.

B501BHT: Sounder base, includes B501 base above. Temporal three tone.

FMM-1: FlashScan® monitor module. *See DN-6720.*

FDM-1: FlashScan® dual monitor module. *See DN-6720.*

FZM-1: FlashScan® two-wire detector monitor module. *See DN-6720.*

FSM-101: FlashScan® miniature monitor module. *See DN-6720.*

FCM-1: FlashScan® NAC control module. *See DN-6724.*

FRM-1: FlashScan® relay module. *See DN-6724.*

FSM-101: FlashScan® pull station monitor module.

NBG-12LX: Manual fire alarm station, addressable. *See DN-6726.*

ISO-X: Isolator module. *See DN-2243.*

XP Series: Transponder. *See DN-0759.*

XP5-M: FlashScan® transponder, five monitor points. *See DN-6625.*

XP5-C: FlashScan® transponder, five control points or Form-C relays. *See DN-6625.*

XP6-C: FlashScan® six-circuit supervised control module. *See DN-6924.*

XP6-MA: FlashScan® six-zone interface module; connects intelligent alarm system to two-wire conventional detection zone. *See DN-6925.*

XP6-R: FlashScan® six-relay (Form-C) control module. *See DN-6926.*

XP10-M: FlashScan® ten-input monitor module. *See DN-6923.*

XPIQ: Intelligent quad transponder. *See DN-6823.*

OTHER OPTIONS

DPI-232: Direct Panel Interface, specialized modem for extending serial data links to remotely located FACP's and/or peripherals. *See DN-6870.*

LEM-320: Loop Expander Module. Expands each 640 to two Signaling Line Circuits. *See DN-6881.*

TM-4: Transmitter Module. Includes three reverse-polarity circuits and one municipal box circuit. Mounts in panel module position (single-address-style) or in CHS-M2 position. *See DN-6860.*

NCM-W: Network Communications Module, Wire. Order one NCM per network node (CPU-640 or NCA). *See DN-6861.*

NCM-F: Network Communications Module, Fiber. Order one NCM per network node (CPU-640 or NCA). *See DN-6861.*

NCS5-W-ONYX: Network Control Station, Wire. UL-Listed graphics PC with mouse, 17" color flat-screen LCD monitor. Order as necessary for network systems. Each NCS consumes one of 103 network addresses. *See DN-6868 (previous NCS-W), ONYX® DN-6869.*

NCS5-F-ONYX: Network Control Station, Fiber. UL-Listed graphics PC with mouse, 17" color flat-screen LCD monitor. Order as necessary for network systems. Each NCS consumes one of 103 network addresses. *See DN-6868 (previous NCS-F), ONYX® DN-6869.*

VeriFire-TCD: VeriFire® Tools CD-ROM. Contains programming software for the NFS-640, NCA, and XPIQ. Includes local panel connection cable. Programming PC requires a serial port connection. *See DN-6871.*

ACM-24AT: ONYX® Series ACS annunciator – up to 96 points of annunciation with Alarm or Active LED, Trouble LED, and switch per circuit. Active/Alarm LEDs can be programmed (by powered-up switch selection) by point to be red, green, or yellow; the Trouble LED is always yellow. *See DN-6862.*

AEM-24AT: Same LED and switch capabilities as ACM-24AT, expands the ACM-24AT to 48, 72, or 96 points. *See DN-6862.*

ACM-48A: ONYX® Series ACS annunciator – up to 96 points of annunciation with Alarm or Active LED per circuit. Active/Alarm LEDs can be programmed (by powered-up switch selection) in groups of 24 to be red, green, or yellow. Expandable to 96 points with one AEM-48A. *See DN-6862.*

AEM-48A: Same LED capabilities as ACM-48A, expands the ACM-48A to 96 points. *See DN-6862.*

BAT Series: Batteries. NFS-640 utilizes two 12 volt, 12 to 55 AH batteries. *See DN-6933.*

PS Series: Batteries. NFS-640 utilizes two 12 volt, 12 to 55 AH batteries. *See DN-1109.*

NFS-LBB: Battery Box (required for batteries over 25 AH).

BR: Same as above but red.

SYSTEM SPECIFICATIONS

System Capacity

- Intelligent Signaling Line Circuits 1 expandable to 2
- Intelligent detectors 159 per loop
- Addressable monitor/control modules 159 per loop
- Programmable internal hardware and output circuits (4 standard) 68
- Programmable software zones 99
- Special programming zones 14
- LCD annunciators per CPU-640/-640E and NCA (observe power) 32
- ACS annunciators per CPU-640/-640E 32 address x 64 points
- ACS annunciators per NCA 32 address x 64 or 96 points

NOTE: The NCA supports up to 96 annunciator address points per ACM-24/48.

Specifications

- Primary input power, **CPU-640 board:** 120 VAC, 50/60 Hz, 3.0 amps. **CPU-640E board:** 220/240 VAC, 50/60 Hz, 1.5 Amps.
- **Total** output 24 V power: 6.0 A in alarm.

NOTE: The power supply has a total of 6.0 Amps of available power. This is shared by all internal modules.

- Standard notification circuits (4): 2.5 A each.
- Four-wire detector power: 1.25 A.
- Non-resettable regulated power outputs: 1.25 A each.
- Battery charger range: 12 AH – 55 AH. Use separate cabinet for batteries over 25 AH.
- Optional high-capacity (25 – 120 AH) battery charger: CHG-120 (see CHG-120 data sheet, DN-6040).
- Float rate: 27.6 V.

Temperature and Humidity Ranges

This system meets NFPA requirements for operation at 0 – 49°C/32 – 120°F and at a relative humidity 93% ± 2% RH (noncondensing) at 32°C ± 2°C (90°F ± 3°F). However, the useful life of the system's standby batteries and the electronic

components may be adversely affected by extreme temperature ranges and humidity. Therefore, it is recommended that this system and its peripherals be installed in an environment with a normal room temperature of 15 – 27°C/60 – 80°F.

Agency Listings and Approvals

The listings and approvals below apply to the basic NFS-640 control panel. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL:** S635
- **ULC:** CS118
- **FM APPROVED** Exceptions – CPU-640E, PRN-5, Proprietary service
- **CSFM:** 7165-0028:214, 7170-0028:216
- **MEA:** 317-01-E
- **City of Chicago**
- **City of Denver**
- **Lloyd's Register:** 02/60007
- **U.S. Coast Guard:** 161.002/42/1
- **China Classification Society (CCS):** #NL05T00001 (NFS-640E)
- **CCCF:** Certif. # 2003081801600815

Standards

The NFS-640 complies with the following UL Standards and NFPA 72 Fire Alarm Systems requirements :

- **UL 864** (Fire)
- **UL 1076** (Burglary)
- **LOCAL** (Automatic, Manual, Waterflow and Sprinkler Supervisory).
- **AUXILIARY** (Automatic, Manual and Waterflow) (requires 4XTMF).
- **REMOTE STATION** (Automatic, Manual and Waterflow) (requires 4XTMF).
- **PROPRIETARY** (Automatic, Manual and Waterflow).
Not applicable for FM.
- **EMERGENCY VOICE/ALARM.**

Acclimate Plus™, HARSH™, NIS™, Notifier Integrated Systems™, and NOTIFIRE•NET™ are all trademarks; and FlashScan®, NION®, NOTIFIER®, ONYX®, UniNet®, VeriFire®, and VIEW® are all registered trademarks of Honeywell International Inc.

©2006 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.
We try to keep our product information up-to-date and accurate.
We cannot cover all specific applications or anticipate all requirements.
All specifications are subject to change without notice.



Made in the U.S.A.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.
www.notifier.com

CALIFORNIA DEPARTMENT OF FORESTRY & FIRE PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING - BUILDING MATERIALS LISTING PROGRAM



LISTING SERVICE

LISTING No. 7315-0028:0225 Page 1 of 1

CATEGORY: 7315 -- POWER UNITS

LISTEE: NotifierOne Fire-Lite Place, Northford, CT 06472-1653
Contact: Vladimir Kireyev (203) 484-6277 Fax (203) 484-7309
Email: vladimir.kireyev@honeywell.com

DESIGN: Models FCPS-24S6 and FCPS-24S8 are power limited power supply/battery chargers used for supervision and expanded power driving capability of up to four Notification Appliance Circuits (FACP Fire Circuits, Signaling Devices) or resettable/non resettable outputs. Model ZNAC-4 Class A converter. Refer to listee's data sheet for additional detailed product description and operational considerations.

RATING: 120 VAC, 24 VDC

INSTALLATION: In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction.

MARKING: Listee's name, model number, electrical rating and UL label.

APPROVAL: Listed as a Power Supply/Battery Charger for use with separately listed compatible fire alarm control units.

XLF: 7315-0075:0206

1-24-03KK



This listing is based upon technical data submitted by the applicant. CSFM Fire Engineering staff has reviewed the test results and/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other

Date Issued: **July 01, 2017**

Listing Expires **June 30, 2018**

Authorized By: **DAVID CASTILLO**, Program Coordinator
Fire Engineering Division

FCPS-24S6(C/E) & FCPS-24S8(C/E)

6- & 8-Amp 24-Volt Remote Power Supplies



Power Supplies


General

The FCPS-24S6E (6-amp) and FCPS-24S8E (8-amp) are remote power supplies with battery charger. The FCPS-24S6/-24S8 may be connected to any 12 or 24 volt fire alarm control panel (FACP) or may be used as stand-alone supplies. Primary applications include notification appliance (bell) circuit (NAC) expansion (to support ADA requirements and NAC synchronization) or auxiliary power to support 24 volt system accessories. The FCPS-24S6/-24S8 provides regulated and filtered 24 VDC power to four notification appliance circuits configured as either four Class B (Style Y) or Class A (Style Z, with ZNAC-4 option module). Alternately, the four outputs may be configured as all non-resettable, all resettable or two non-resettable and two resettable. The FCPS-24S6/-24S8 also contains a battery charger capable of charging up to 18 AH batteries. FCPS-24S6C & FCPS-24S8C are ULC-listed.

NOTE: Unless otherwise specified, the terms FCPS-24S6 and FCPS-24S8 used in this document refers to the standard FCPS-24S6 and FCPS-24S8, FCPS-24S6C and FCPS-24S8C, the FCPS-24S6E and FCPS-24S8E

Features

- UL-Listed NAC synchronization using System Sensor, Wheelock, or Gentex "Commander²" appliances.
- Operates as a "sync-follower" or as a "sync-generator" (default). See note on page 2.
- Contains two fully-isolated input/control circuits - triggered from FACP NAC (NAC expander mode) or jumped permanently "ON" (stand-alone mode).
- Four Class B (Style Y) or four Class A (Style Z, with ZNAC-4 module) NACs.
- 6-amp (FCPS-24S6) or 8-amp (FCPS-24S8) full load output, with 3 amps maximum/circuit, in NAC expander mode (UL 864).
- 4-amp (FCPS-24S6) or 6-amp (FCPS-24S8) continuous output in stand-alone mode (UL 1481).
- Compatible with coded inputs; signals passed through.
- Optional power-supervision relay (EOLR-1).
- In stand-alone mode, output power circuits may be configured as: resettable, (reset line from FACP required), non-resettable, or a mix of two and two.
- Fully regulated and filtered power output - optimal for powering four-wire smoke detectors, annunciators, and other system peripherals requiring regulated/filtered power.
- Power-limiting technology meets UL power-limiting requirements.
- Form-C normally-closed trouble relay.
- Fully supervised power supply, battery, and NACs.
- Selectable earth fault detection.
- AC trouble report selectable for immediate 2-hour delay.
- Works with virtually any UL 864 fire alarm control which utilizes an industry-standard reverse-polarity notification circuit (including unfiltered and unregulated bell power).
- Requires input trigger voltage of 9 - 32 VDC.
- Self-contained in compact, locking cabinet - 15"H x 14.5"W x 2.75"D (cm: 38.1H x 36.83W x 6.985D).

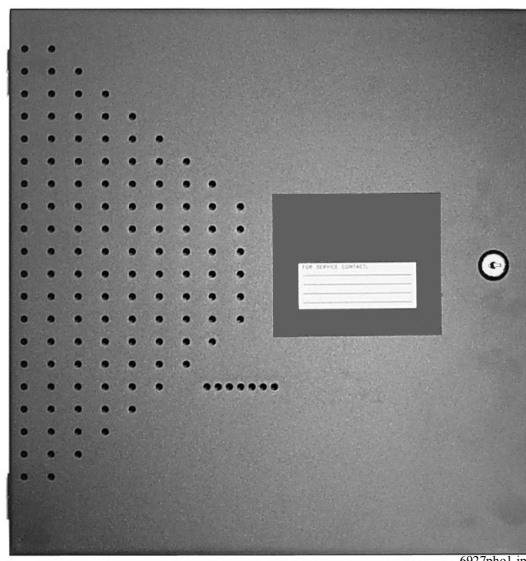

6927ph01.jpg

- Includes integral battery charger capable of charging up to 18 AH batteries. Cabinet capable of housing 7.0 AH batteries.
- Battery charger may be disabled via DIP switch for applications requiring larger batteries.
- Fixed, clamp-type terminal blocks accommodate up to 12 AWG (3.1mm²) wire.

Specifications

Primary (AC) Power:

- FCPS-24S6C/-24S8C: 120 VAC, 60 Hz, 3.2A maximum.
- FCPS-24S6E/-24S8E: 240 VAC, 50 Hz, 1.6A maximum.
- Wire Size: minimum #14 AWG (2.0mm²) with 600 V insulation.

Control Input Circuit:

- **Trigger Input Voltage:** 9 to 32 VDC.
- **Trigger Current:** 2.0 mA (16 - 32 V); Per Input: 1.0 mA (9 - 16 V).

Trouble Contact Rating:

5 A at 24 VDC.

Auxiliary Power Output: Specific application power 500 mA maximum.

Output Circuits:

- +24 VDC filtered, regulated.
- 3.0 A maximum for any one circuit.
- Total continuous current for all outputs (stand-alone mode):
 - FCPS-24S6: 4.0 A maximum.
 - FCPS-24S8: 6.0 A maximum.
- Total short-term current for all outputs (NAC expander mode):
 - FCPS-24S6: 6.0 A maximum.
 - FCPS-24S8: 8.0 A maximum.

Secondary Power (Battery) Charging Circuit:

- Supports lead-acid batteries only.
- Float-charge voltage: 27.6 VDC.

- Maximum current charge: 1.5 A.
- Maximum battery capacity: 18 AH.

Applications

Example 1: Expand notification appliance power an additional 6.0 A (FCPS-24S6) or 8.0 A (FCPS-24S8). Use up to four Class B (Style Y) outputs or four Class A (Style Z) outputs (using ZNAC-4). For example, the FACP notification appliance circuits will activate the FCPS when reverse-polarity activation occurs. Trouble conditions on the FCPS are sensed by the FACP through the notification appliance circuit.

Example 2: Use the FCPS to expand auxiliary regulated 24-volt system power up to 4.0 A (FCPS-24S6) or up to 6.0 A (FCPS-24S8). Both resettable and non-resettable power options are available. Resettable outputs are created by connecting the resettable output from the FACP to one or both of the FCPS inputs.

Example 3: Use addressable control modules to activate the FCPS instead of activating it through the FACP notification appliance circuits. This typically allows for mounting the FCPS at greater distances* away from the FACP while expanding system architecture in various applications.

For example, an addressable control module is used to activate the FCPS, and an addressable monitor module is used to sense FCPS trouble conditions. Local auxiliary power output from the FCPS provides power to the addressable control module.

****NOTE:** Addressable FACP's are capable of locating control and monitor modules at distances of up to 12,500 feet (3,810 meters).*

Sync Follower/Generator Note

In some installations, it is necessary to synchronize the flash timing of all strobes in the system for ADA compliance. Strobes accomplish this by monitoring very short timing pulses on the NAC power which are created by the FACP. When installed at the end of a NAC wire run, the FCPS-24S6/-24S8 can track (i.e. "follow") the strobe synchronization timing pulses on the existing NAC wire run. This maintains the overall system flash timing of the additional strobes attaches to the FCPS.

When the FCPS-24S6/-24S8 is configured (via DIP switch settings) as a "sync follower," the FCPS's NAC outputs track the strobe synchronization pulses present at the FCPS's sync input terminal. The pulses originate from an upstream FACP or other power supply.

When the FCPS-24S6/-24S8 are configured (via DIP switch settings) as a "sync generator," the FCPS's sync input terminals are not used. Rather, the FCPS is the originator of the strobe synchronization pulses on the FCPS's NAC outputs. In "sync generator" mode, the sync type (System Sensor, Wheelock, or Gentex) is selectable via DIP switch settings.

Standards and Codes

The FCPS-24S6 and FCPS-24S8 comply with the following standards:

- **NFPA 72** National Fire Alarm Code.
- **UL 864** Standard for Control Units for Fire Alarm Systems (NAC expander mode).
- **UL 1481** Power Supplies for Fire Alarm Systems.

Agency Listings and Approvals

These listings and approvals apply to the modules specified in this document. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL Listed:** S635, S674
- **ULC Listed:** S635 (FCPS-24S6C & FCPS-24S8C)
- **CSFM Approved:** 7315-0028:225
- **MEA:** 299-02-E
- **FM Approved**

Ordering Information

FCPS-24S6: 6.0 A, 120 VAC remote charger power supply. Includes main printed circuit board, transformers, enclosure (15"H x 14.5"W x 2.75"D [cm: 38.1H x 36.83W x 6.985D]), and installation instructions.

FCPS-24S6C: Same as above, ULC-listed.

FCPS-24S6R: Same as FCPS-24S6 with red enclosure.

FCPS-24S6E: 6.0 A, 240 VAC remote charger power supply. Includes main printed circuit board, transformers, enclosure (15"H x 14.5"W x 2.75"D [cm: 38.1H x 36.83W x 6.985D]), and installation instructions.

FCPS-24S8: 8.0 A, 120 VAC remote charger power supply. Includes main printed circuit board, transformers, enclosure (15"H x 14.5"W x 2.75"D [cm: 38.1H x 36.83W x 6.985D]), and installation instructions.

FCPS-24S8C Same as above, ULC-listed.

FCPS-24S8R: Same as FCPS-24S8 with red enclosure.

FCPS-24S8E: 8.0 A, 240 VAC remote charger power supply. Includes main printed circuit board, transformers, enclosure (15"H x 14.5"W x 2.75"D [cm: 38.1H x 36.83W x 6.985D]), and installation instructions.

ZNAC-4: Class A (Style Y) NAC option module.

EOLR-1: 12/24 VDC end-of-line relay for monitoring four-wire smoke detector power.

BAT-1270: Battery, 12-volt, 7.0 AH (two required, see BAT Series data sheet DN-6933).

PS-1270: Battery, 12-volt, 7.0 AH (two required, see PS Series data sheet DN-1109)

System Sensor® and NOTIFIER® are registered trademarks of Honeywell International Inc.

©2009 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.
We try to keep our product information up-to-date and accurate.
We cannot cover all specific applications or anticipate all requirements.
All specifications are subject to change without notice.



Made in the U.S. A.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.
www.notifier.com

CALIFORNIA DEPARTMENT OF FORESTRY & FIRE PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING - BUILDING MATERIALS LISTING PROGRAM



LISTING SERVICE

LISTING No. 7270-0028:0196

Page 1 of 1

CATEGORY: 7270 -- HEAT DETECTOR

LISTEE: NotifierOne Fire-Lite Place, Northford, CT 06472-1653
Contact: Vladimir Kireyev (203) 484-6277 Fax (203) 484-7309
Email: vladimir.kireyev@honeywell.com

DESIGN: Models FST-751, -851, -851R, -851H (fixed temperature) and FST-751R (fixed temperature with Rate-of-Rise) electronic heat detectors. Refer to listee's data sheet for additional detailed product description and operational considerations.

RATING: Models FST-751, -751R, -851, and -851R = 135°F fixed temperature
Model FST-851H = 190°F fixed temperature

INSTALLATION: In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction.

MARKING: Listee's name, model number, electrical ratings, and UL label.

APPROVAL: Listed as heat detectors for use with Models B501, *B210LP (CSFM Listing No. 7300-1653:0109), or B710LP base (CSFM Listing No. 7300-0028:173) and separately listed compatible fire alarm control units. Refer to listee's Installation Instructions Manual for details.

*11-22-2016 dc



This listing is based upon technical data submitted by the applicant. CSFM Fire Engineering staff has reviewed the test results and/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other

Date Issued: **July 01, 2017**

Listing Expires **June 30, 2018**

Authorized By: **DAVID CASTILLO**, Program Coordinator
Fire Engineering Division

FST-851(A) Series

Intelligent Thermal (Heat) Detectors with FlashScan®



Intelligent / Addressable Devices

General

Notifier FST-851(A) Series intelligent plug-in thermal detectors with integral communication has features that surpass conventional detectors. Point ID capability allows each detector's address to be set with rotary, decimal address switches, providing exact detector locations. FST-851(A) Series thermal detectors use an innovative thermistor sensing circuit to produce 135°F/57°C fixed-temperature (FST-851/A) and rate-of-rise thermal detection (FST-851R/A) in a low-profile package. FST-851H(A) provides fixed high-temperature detection at 190°F/88°C. These thermal detectors provide effective, intelligent property protection in a variety of applications. FST-851(A) Series detectors are compatible with Notifier Onyx and CLIP series Fire Alarm Control Panels (FACPs).

FlashScan® (U.S. Patent 5,539,389) is a communication protocol developed by Notifier Engineering that greatly enhances the speed of communication between analog intelligent devices and certain NOTIFIER systems. Intelligent devices communicate in a grouped fashion. If one of the devices within the group has new information, the panel's CPU stops the group poll and concentrates on single points. The net effect is response speed greater than five times that of earlier designs.

Features

- Sleek, low-profile, stylish design.
- State-of-the-art thermistor technology for fast response.
- Rate-of-rise model (FST-851R/A), 15°F (8.3°C) per minute.
- Factory preset fixed temperature at 135°F (57°C); high-temperature model fixed at 190°F (88°C).
- Addressable by device.
- Compatible with FlashScan® and CLIP protocol systems.
- Rotary, decimal addressing (1-99 on CLIP systems, 1-159 on FlashScan systems).
- Two-wire SLC connection.
- Visible LEDs "blink" every time the unit is addressed.
- 360°-field viewing angle of the visual alarm indicators (two bi-color LEDs). LEDs blink green in Normal condition and turn on steady red in Alarm.
- Integral communications and built-in device-type identification.
- Remote test feature from the panel.
- Built-in functional test switch activated by external magnet.
- Walk test with address display (an address of 121 will blink the detector LED 12-(pause)-1).
- Low standby current.
- Backward-compatible.
- Built-in tamper-resistant feature.
- Designed for direct-surface or electrical-box mounting.
- Sealed against back pressure.
- Plugs into separate base for ease of installation and maintenance. Separate base allows interchange of photoelectric, ionization and thermal sensors.
- SEMS screws for wiring of the separate base.
- Constructed of off-white fire-resistant plastic, designed to commercial standards, and offers an attractive appearance.



FST-851(A) in B210LP(A) Base

B210-2251.jpg

- 94-5V plastic flammability rating.
- Remote LED output connection to optional RA100Z(A) remote LED annunciator.
- Optional sounder, relay, and isolator bases.
- Optional flanged surface mounting kit.

Specifications

Size: 2.1" (5.3 cm) high; base determines diameter.

- **B210LP(A):** 6.1" (15.5 cm) diameter.
- **B501(A):** 4.1" (10.4 cm) diameter.
- **B200S(A):** 6.875" (17.46 cm) diameter.
- **B200SR(A):** 6.875" (17.46 cm) diameter.
- **B224RB(A):** 6.2" (15.748 cm) diameter.
- **B224BI(A):** 6.2" (15.748 cm) diameter.

Shipping weight: 4.8 oz. (137 g).

Operating temperature range: FST-851(A) Series, FST-851R(A): -20°C to 38°C (-4°F to 100°F); FST-851H(A): -20°C to 66°C (-4°F to 150°F).

Detector spacing: UL approved for 50 ft. (15.24 m) center to center. FM approved for 25 x 25 ft. (7.62 x 7.62 m) spacing.

Relative humidity: 10% – 93% noncondensing.

Thermal ratings: fixed-temperature setpoint 135°F (57°C), rate-of-rise detection 15°F (8.3°C) per minute, high temperature heat 190°F (88°C).

ELECTRICAL SPECIFICATIONS

Voltage range: 15 - 32 volts DC peak.

Standby current (max. avg.): 300 µA @ 24 VDC (one communication every 5 seconds with LED enabled).

LED current (max.): 6.5 mA @ 24 VDC ("ON").

Applications

Use thermal detectors for protection of property. For further information, go to systemsensor.com for manual I56-407-00, Applications Manual for System Smoke Detectors, which provides detailed information on detector spacing, placement, zoning, wiring, and special applications.

Installation

The FST Series plug-in intelligent thermal detectors use a separate base to simplify installation, service, and maintenance. Installation instructions are shipped with each detector. A special tool allows maintenance personnel to plug in and remove detectors without using a ladder.

Mount base (all base types) on an electrical backbox which is at least 1.5" (3.81 cm) deep. For a chart of compatible junction boxes, see *DN-60054*.

NOTE: 1) Because of the inherent supervision provided by the SLC loop, end-of-line resistors are not required. Wiring "T-taps" or branches are permitted for Style 4 (Class "B") wiring. **2)** When using relay or sounder bases, consult the ISO-X(A) installation sheet 156-1380 for device limitations between isolator modules and isolator bases.

Agency Listings and Approvals

These listings and approvals apply to the modules specified in this document. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL Listed:** S747.
- **ULC Listed:** S6978.
- **MEA Listed:** 383-02-E.
- **FM Approved.**
- **CSFM:** 7270-0028:0196.
- **BSMI:** CI313066760025.
- **CCCF:** Certif. # 2004081801000018.
- **U.S. Coast Guard:** 161.002/42/1 (NFS-640); 161.002/50/0 (NFS2-640/NFS-320/NFS-320C, excluding B210LP(A)).
- **Lloyd's Register:** 11/600013 (NFS2-640/NFS-320/NFS-320C, excluding B210LP(A)).

Product Line Information

NOTE: "A" suffix indicates ULC Listed model.

FST-851: Intelligent thermal detector. Must be mounted to one of the bases listed below.

FST-851A: Same as FST-851 but with ULC Listing.

FST-851R: Intelligent thermal detector with rate-of-rise feature.

FST-851RA: Same as FST-851R but with ULC Listing.

FST-851H: Intelligent high-temperature thermal detector.

FST-851HA: Same as FST-851H but with ULC Listing.

INTELLIGENT BASES

NOTE: "A" suffix indicates ULC Listed model.

NOTE: For details about intelligent bases and their mounting, see *DN-60054*.

B210LP(A): Standard U.S. flanged low-profile mounting base.

B210LPBP: Bulk pack of B210LP; package contains 10.

B501(A): Standard European flangeless mounting base.

B501BP: Bulk pack of B501; package contains 10.

B200S(A): Addressable Intelligent, programmable sounder base capable of producing sound output in high or low volume

with ANSI Temporal 3, ANSI Temporal 4, continuous tone, marching tone, and custom tone.

B200SR(A): Intelligent sounder base capable of producing sound output with ANSI Temporal 3 or continuous tone. Replaces B501BH series bases in retrofit applications.

B224RB(A): Intelligent relay base. Screw terminals: up to 14 AWG (2.0 mm²). Relay type: Form-C. Rating: 2.0 A @ 30 VDC resistive; 0.3 A @ 110 VDC inductive; 1.0 A @ 30 VDC inductive.

B224BI(A): Intelligent isolator base. Isolates SLC from loop shorts. Maximum: 25 devices between isolator bases; see Note 2 under Installation.

ACCESSORIES

F110: Retrofit flange to convert B210LP(A) to match the B710LP(A) profile, or to convert older high-profile bases to low-profile.

F110BP: Bulk pack of F110; package contains 15.

F210: Replacement flange for B210LP(A) base.

RA100Z(A): Remote LED annunciator. 3 – 32 VDC. Fits U.S. single-gang electrical box. Supported by B210LP(A) and B501(A) bases only.

SMB600: Surface mounting kit, flanged.

M02-04-00: Test magnet.

M02-09-00: Test magnet with telescoping handle.

XR2B: Detector removal tool. Allows installation and/or removal of FlashScan® Series detector heads from base in high ceiling installations. Includes T55-127-010.

T55-127-010: Detector removal tool without pole.

XP-4: Extension pole for XR2B. Comes in three 5-foot (1.524 m) sections.

Notifier® and FlashScan® are registered trademarks of Honeywell International Inc.

©2011 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.
We try to keep our product information up-to-date and accurate.
We cannot cover all specific applications or anticipate all requirements.
All specifications are subject to change without notice.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.
www.notifier.com



CALIFORNIA DEPARTMENT OF FORESTRY & FIRE PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING - BUILDING MATERIALS LISTING PROGRAM



LISTING SERVICE

LISTING No. 7300-0028:0173 Page 1 of 1

CATEGORY: 7300 -- FIRE ALARM CONTROL UNIT ACCESSORIES/MISC. DEVICES

LISTEE: NotifierOne Fire-Lite Place, Northford, CT 06472-1653
Contact: Vladimir Kireyev (203) 484-6277 Fax (203) 484-7309
Email: vladimir.kireyev@honeywell.com

DESIGN: Models BX501, B610LP, B612LP, B614LP, B616LP and B710LP detector bases. Refer to listee's data sheet for additional detailed product description and operational considerations.

INSTALLATION: In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction

MARKING: Listee's name, product designation, electrical rating and UL label.

APPROVAL: Listed as detector bases for use with separately listed compatible detectors.

*Corrected 10-20-08 bh



This listing is based upon technical data submitted by the applicant. CSFM Fire Engineering staff has reviewed the test results and/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other

Date Issued: **July 01, 2017**

Listing Expires **June 30, 2018**

Authorized By: **DAVID CASTILLO**, Program Coordinator
Fire Engineering Division

Intelligent Bases

B224BI(A), B224RB(A), B501(A), B501BH(A), B501BH-2(A), B501BHT(A), B501BHT-2(A), B710LP(A), Mounting Kits, and Accessories



Intelligent Addressable Devices

General

Intelligent FlashScan® and CLIP mounting bases and kits provide a variety of ways to install NOTIFIER detectors in any application. Intelligent detectors can be mounted in either flanged or flangeless bases depending on junction box selection (see *Junction Box Selection Guide*). Across this product line, detectors plug in easily to the base with SEMS screws; and models employ various 12 to 22 AWG wire ranges.

Relay, isolator, and sounder bases can be used to meet local code requirements. Relay bases provide one Form-C contact relay for control of auxiliary functions such as door closure and elevator recall. Isolator bases allow loops to continue to operate under fault conditions and automatically restore when the fault is removed. Sounder bases are available in temporal and non-temporal pattern versions depending on whether the signal is to be used for evacuation purposes.

The **RMK400 recessed mounting kit** provides the most aesthetically pleasing installation. Surface mounting boxes are available when flush mounting isn't possible.

Specifications

Diameter: For B501: 4.1" (104 mm). For B224BI, B224RB, B710LP: 6.1" (155 mm). For B501BH, B501BH-2, B501BHT, B501BHT-2: 6.0" (152 mm).

Wire gauge: for B224BI, B224RB: 14 to 24 AWG. For B710LP, B501, B501BH, B501BH-2, B501BHT, B501BHT-2: 12 to 18 AWG.

Temperature range: For B224BI, B224RB, B501BH, B501BH-2, B501BHT, B501BHT-2: 32°F to 120°F (0°C to 49°C). For B501 and B710LP, 32°F to 150°F (0°C to 66°C).

Humidity range: 10% to 93% RH, non-condensing.

System temperature and humidity ranges: This system meets NFPA requirements for operation at 0°C to 49°C (32°F to 120°F); and at a relative humidity (noncondensing) of 85% at 30°C (86°F) per NFPA, and 93% ± 2% at 32°C ± 2°C (89.6°F ± 1.1°F) per ULC. However, the useful life of the system's standby batteries and the electronic components may be adversely affected by extreme temperature ranges and humidity. Therefore, it is recommended that this system and all peripherals be installed in an environment with a nominal room temperature of 15°C to 27°C (60°F to 80°F).

Electrical Ratings

FOR B224RB, B224BI:

Operating voltage: 15 to 32 VDC (powered by SLC).

Standby ratings: <500 µA maximum @ 24 VDC.

Set time (B224RB only): short delay 55 to 90 msec; long delay 6 to 9 seconds.

Reset time (B224RB only): 20 msec maximum.

Relay characteristics (B224RB only): two-coil latching relay; one Form-C contact; ratings (UL/CSA): 0.9 A @ 125 VAC, 0.9 A @ 110 VDC, and 3.0 A @ 30 VDC.

FOR B501BH, B501BH-2, B501BHT, B501BHT-2:

External supply voltage: 17 to 32 VDC.

Standby current: 1.0 mA maximum.

Alarm current: 15 mA maximum.



Flangeless Mounting Base



Relay Base



Flanged Mounting Base



Recessed Mounting



Standard Sounder Base



Flangeless Surface Mounting

Maximum ripple voltage: 10% of supply voltage.

Startup capacitance: 200 µF.

Set time: for B501BH and B501BHT, 6 to 15 seconds. For B501BH-2 and B501BHT-2, 0.75 to 5.7 seconds.

Sound output: greater than 90 dBA measured in anechoic room at 10 feet (3.048 m), 24 volts. 85 dBA minimum in UL reverberant room.

Recessed Mounting Kit

The RMK400 can be used with drywall or suspended ceilings. The aesthetically pleasing design can be used with standard junction boxes — suitable for use with 4.0" (10.16 cm) octagonal, 50 mm, and 60 mm junction boxes connected to flexible conduit. Note that junction boxes are not included in the kit. As an application example, with the B501 base, the RMK400 provides a simple installation solution in applications that demand a lower-profile smoke detector.

Agency Listings and Approvals

The listings and approvals below apply to intelligent bases as noted. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

Listing information to be provided in upcoming edits. Consult panel manuals for lists of compatible UL-Listed devices. All bases have been previously listed for use with various panels.

Product Line Information

INTELLIGENT BASES

B501: Flangeless mounting base.

B501A: Flangeless mounting base, ULC Listed.

B710LP: Flanged mounting base.
B710LPA: Flanged mounting base, ULC UL Listed.
B501BH: Standard sounder base.
B501BHA: Standard sounder base, ULC Listed.
B501BHT: Temporal tone sounder base.
B501BH-2: Standard sounder base, UL 864 9th edition compliant.
B501BH-2A: Standard sounder base, UL 864 9th edition compliant, ULC Listed.
B501BHT-2: Temporal tone sounder base, UL 864 9th edition compliant.
B501BHT-2A: Temporal tone sounder base, UL 864 9th edition compliant, ULC Listed.
B224RB: Relay base.
B224RBA: Relay base, ULC Listed.

B224BI: Isolator base.
B224BIA: Isolator base, ULC Listed.
MOUNTING KITS AND ACCESSORIES
RMK400: Recessed mounting kit.
SMK400: Surface mounting kit, flangeless.
SMB600: Surface mounting kit, flanged.
F110: Retrofit flange for B501B, B524.
RA400Z: Remote LED annunciator.
RA400ZA: Remote LED annunciator, ULC Listed.
M02-04-01: Detector test magnet.
M02-09-00: Test magnet with telescoping handle.
XR2B: Detector removal tool (*T55-127-000 included*).
XP-4: Extension pole for XR2B (*5 to 15 ft/1.524 to 4.572 m*).
T55-127-000: Detector removal head.
BCK-200B: Black detector kit.

Junction Box Selection Guide

Base Models	Single-Gang	3.5" Oct.	4.0" Oct.	4.0" Sq.	4.0" Sq. with 3.0" mud ring	50 mm	60 mm	70 mm	75 mm
B501	No	Yes	No	No	Yes	Yes	Yes	Yes	No
B710LP	Yes	Yes	Yes	Yes	Yes	No	No	No	No
B224RB	No	Yes	Yes	Yes	No	No	Yes	Yes	Yes
B224BI	No	Yes	Yes	Yes	No	No	No	Yes	Yes
B501BH, B501BH-2	No	No	No	Yes	No	No	No	No	No
B501BHT, B501BHT-2	No	No	No	Yes	No	No	No	No	No

NOTE: Box depth contingent on base and wire size.
Refer to National Electric Code or applicable local codes for appropriate recommendations.

FlashScan®, NOTIFIER® and System Sensor® are registered trademarks of Honeywell International Inc.
©2006 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.
We try to keep our product information up-to-date and accurate.
We cannot cover all specific applications or anticipate all requirements.
All specifications are subject to change without notice.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.
www.notifier.com

CALIFORNIA DEPARTMENT OF FORESTRY & FIRE PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING - BUILDING MATERIALS LISTING PROGRAM



LISTING SERVICE

LISTING No. 7272-0028:0206
CATEGORY: 7272 -- SMOKE DETECTOR-SYSTEM TYPE-PHOTOELECTRIC

Page 1 of 1

LISTEE: NotifierOne Fire-Lite Place, Northford, CT 06472-1653
Contact: Vladimir Kireyev (203) 484-6277 Fax (203) 484-7309
Email: vladimir.kireyev@honeywell.com

DESIGN: Models FSP-751, HPX-751, FSP-751T, FSH-751, FAPT-751, FAPT-851, FSP-851, FSP-851R* and FSP-851T photoelectric type smoke detectors. Models FSP-751T and FSP-851T employ a 135°F supplement integral heat sensor which only assists in a fire situation. This thermal circuitry is NOT approved for use in lieu of a required heat detector. Refer to listee's data sheet for additional detailed product description and operational considerations.

RATING: 24 VDC

INSTALLATION: In accordance with listee's printed installation instructions, applicable codes & ordinances and in manner acceptable to the authority having jurisdiction.

MARKING: Listee's name, product number, electrical rating and UL label.

APPROVAL: Listed as photoelectric type smoke detector for use with listee's separately listed compatible base and fire alarm control units. Models FSP-751, FSP-751T, FAPT-751, FAPT-851, FSP-851, FSP-851R*, FSP-851T are suitable for open areas and inside duct installation with air velocities between 0-4000 fpm. Model HPX-751 is suitable for open areas with air velocities between 0-300 fpm. Model FSH-751 is suitable for open areas with air velocity between 0-4000 fpm.

NOTE: Combined with 7272-0028:208

The photoelectric type detectors are generally more effective at detecting slow, smoldering fires that smolder for hours before bursting into flame. Sources of these fires may include cigarettes burning in couches or bedding. The ionization type detectors are generally more effective at detecting fast, flaming fires that consume combustible materials rapidly and spread quickly. Sources of these fires may include paper burning in a waste container or a grease fire in the kitchen.

*Rev. 01-07-2009 fm



This listing is based upon technical data submitted by the applicant. CSFM Fire Engineering staff has reviewed the test results and/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other

Date Issued: **July 01, 2017**

Listing Expires **June 30, 2018**

Authorized By: **DAVID CASTILLO**, Program Coordinator
Fire Engineering Division

FSP-851(A) Series

Intelligent Plug-In Photoelectric Smoke Detectors with FlashScan®



Intelligent/Addressable Devices

General

Notifier FSP-851(A) Series intelligent plug-in smoke detectors with integral communication provide features that surpass conventional detectors. Detector sensitivity can be programmed in the control panel software. Sensitivity is continuously monitored and reported to the panel. Point ID capability allows each detector's address to be set with rotary, decimal address switches, providing exact detector location for selective maintenance when chamber contamination reaches an unacceptable level. The FSP-851(A) photoelectric detector's unique optical sensing chamber is engineered to sense smoke produced by a wide range of combustion sources. Dual electronic thermistors add 135°F (57°C) fixed-temperature thermal sensing on the FSP-851T(A). The FSP-851R(A) is a remote test capable detector for use with DNR(A)/DNRW duct detector housings. FSP-851(A) series detectors are compatible with Notifier Onyx and CLIP series Fire Alarm Control Panels (FACPs).

FlashScan® (U.S. Patent 5,539,389) is a communication protocol developed by Notifier that greatly increases the speed of communication between analog intelligent devices. Intelligent devices communicate in a grouped fashion. If one of the devices in the group has new information, the panel's CPU stops the group poll and concentrates on single points. The net effect is response speed greater than five times that of earlier designs.

Features

- Sleek, low-profile design.
- Addressable-analog communication.
- Stable communication technique with noise immunity.
- Low standby current.
- Two-wire SLC connection.
- Compatible with FlashScan® and CLIP protocol systems.
- Rotary, decimal addressing (1-99 on CLIP systems, 1-159 on FlashScan systems).
- Optional remote, single-gang LED accessory.
- Dual LED design provides 360° viewing angle.
- Visible bi-color LEDs blink green every time the detector is addressed, and illuminate steady red on alarm (*FlashScan systems only*).
- Remote test feature from the panel.
- Walk test with address display (an address on 121 will blink the detector LED: 12-[pause]-1 (*FlashScan systems only*)).
- Built-in functional test switch activated by external magnet.
- Built-in tamper-resistant feature.
- Sealed against back pressure.
- Constructed of off-white fire-resistant plastic, designed to commercial standards, and offers an attractive appearance.
- 94-5V plastic flammability rating.
- SEMS screws for wiring of the separate base.
- Optional relay, isolator, and sounder bases.



FSP-851(A) in B210LP(A) Base

B210-2951.jpg

Specifications

Sensitivity: 0.5% to 2.35% per foot obscuration

Size: 2.1" (5.3 cm) high; base determines diameter.

- **B210LP(A):** 6.1" (15.5 cm) diameter.
- **B501(A):** 4.1" (10.4 cm) diameter.
- **B200S(A):** 6.875" (17.46 cm) diameter.
- **B200SR(A):** 6.875" (17.46 cm) diameter.
- **B224RB(A):** 6.2" (15.748 cm) diameter.
- **B224BI(A):** 6.2" (15.748 cm) diameter.

Shipping Weight: 5.2oz. (147g).

Operating Temperature range: FSP-851(A), 0°C to 49°C (32°F to 120°F). FSP-851T(A), 0°C to 38°C (32°F to 100°F). Low temperature signal for FSP-851T(A) at 45°F +/- 10°F (7.22°C +/- 5.54°C). FSP-851R(A) installed in a DNR(A)/DNRW, -20°C to 70°C (-4°F to 158°F).

UL/ULC Listed Velocity Range: 0-4000 ft/min. (1219.2 m/min.), suitable for installation in ducts.

Relative Humidity: 10%-93% noncondensing.

Thermal Ratings: Fixed-temperature setpoint 135°F (57°C).

DETECTOR SPACING AND APPLICATIONS

Notifier recommends spacing detectors in compliance with NFPA 72. In low airflow applications with smooth ceiling, space detectors 30 feet (9.144m) for ceiling heights 10 feet (3.148m) and higher. For specific information regarding detector spacing, placement, and special applications refer to NFPA 72. *System Smoke Detector Application Guide*, document A05-1003, is available at systemsensor.com

ELECTRICAL SPECIFICATIONS

Voltage Range: 15-32 volts DC peak.

Standby Current (max. avg.): 300µA @ 24VDC (one communication every five seconds with LED enabled).

LED Current (max.): 6.5mA @ 24 VDC ("ON").

Installation

FSP-851(A) plug-in detectors use a separate base to simplify installation, service, and maintenance. A special tool allows maintenance personnel to plug in and remove detectors without using a ladder.

Mount base (all base types) on an electrical backbox which is at least 1.5" (3.81 cm) deep. For a chart of compatible junction boxes, see *DN-60054*.

NOTE: 1) Because of inherent supervision provided by the SLC loop, end-of-line resistors are not required. Wiring "T-taps" or branches are permitted for Style 4 (Class "B") wiring. 2) When using relay or sounder bases, consult the ISO-X(A) installation sheet 156-1380 for device limitations between isolator modules and isolator bases.

Agency Listings and Approvals

These listings and approvals apply to the modules specified in this document. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL Listed:** S1115.
- **ULC Listed:** S1115 (FSP-851A, FSP-851RA, FSP-851TA).
- **MEA Listed:** 225-02-E .
- **FM Approved.**
- **CSFM:** 7272-0028:0206 .
- **Maryland State Fire Marshal:** Permit # 2122 .
- **BSMI:** CI313066760036.
- **CCCF:** Certif. # 2004081801000017 (FSP-851T)
Certif. # 2004081801000016 (FSP-851).
- **U.S. Coast Guard:** 161.002/42/1 (NFS-640); 161.002/50/0 (NFS2-640/NFS-320/NFS-320C, excluding B210LP(A)).
- **Lloyd's Register:** 11/600013 (NFS2-640/NFS-320/NFS-320C, excluding B210LP(A)).

Product Line Information

NOTE: "A" suffix indicates ULC Listed model.

FSP-851: Low-profile intelligent photoelectric sensor. Must be mounted to one of the bases listed below.

FSP-851A: Same as FSP-851 but with ULC listing.

FSP-851T: Same as FSP-851 but includes a built-in 135°F (57°C) fixed-temperature thermal device.

FSP-851TA: Same as FSP-851T but with ULC listing.

FSP-851R: Low-profile intelligent photoelectric sensor, remote test capable. For use with DNRA/DNRW.

FSP-851RA: Same as FSP-851R but with ULC listing. For use with DNRA.

INTELLIGENT BASES

NOTE: "A" suffix indicates ULC Listed model.

NOTE: For details on intelligent bases, see *DN-60054*.

B210LP(A): Standard U.S. flanged low-profile mounting base.

B210LPBP: Bulk pack of B210LP; package contains 10.

B501(A): Standard European flangeless mounting base.

B501BP: Bulk pack of B501; package contains 10.

B200S(A): Intelligent, programmable sounder base capable of producing sound output in high or low volume with ANSI Temporal 3, ANSI Temporal 4, continuous tone, marching tone, and custom tone.

B200SR(A): Intelligent sounder base capable of producing sound output with ANSI Temporal 3 or continuous tone. Replaces B501BH series bases in retrofit applications.

B224RB(A): Plug-in System Sensor **relay** base. Screw terminals: up to 14 AWG (2.0 mm²). Relay type: Form-C. Rating: 2.0 A @ 30 VDC resistive; 0.3 A @ 110 VDC inductive; 1.0 A @ 30 VDC inductive.

B224BI(A): Plug-in System Sensor **isolator** detector base. Maximum 25 devices between isolator bases.

ACCESSORIES

F110: Retrofit flange to convert B210LP(A) to match the B710LP(A) profile, or to convert older high-profile bases to low-profile.

F110BP: Bulk pack of F110; package contains 15.

F210: Replacement flange for B210LP(A) base.

RA100Z(A): Remote LED annunciator. 3 – 32 VDC. Mounts to a U.S. single-gang electrical box. For use with B501(A) and B210LP(A) bases only.

SMB600: Surface mounting kit

M02-04-00: Test magnet.

M02-09-00: Test magnet with telescoping handle.

XR2B: Detector removal tool. Allows installation and/or removal of detector heads from bases in high ceiling applications.

XP-4: Extension pole for XR2B. Comes in three 5-foot (1.524 m) sections.

T55-127-010: Detector removal tool without pole.

BCK-200B: Black detector covers for use with FSP-851(A) only; box of 10.

WCK-200B: White detector covers for use with FSP-851(A) only; box of 10.

NOTIFIER® is a registered trademark of Honeywell International Inc.
©2015 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.
We try to keep our product information up-to-date and accurate.
We cannot cover all specific applications or anticipate all requirements.
All specifications are subject to change without notice.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.
www.notifier.com

CALIFORNIA DEPARTMENT OF FORESTRY & FIRE PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING - BUILDING MATERIALS LISTING PROGRAM



LISTING SERVICE

LISTING No. 7300-0028:0219 Page 1 of 1

CATEGORY: 7300 -- FIRE ALARM CONTROL UNIT ACCESSORIES/MISC. DEVICES

LISTEE: NotifierOne Fire-Lite Place, Northford, CT 06472-1653
Contact: Vladimir Kireyev (203) 484-6277 Fax (203) 484-7309
Email: vladimir.kireyev@honeywell.com

DESIGN: Models XP6-R relay module, XP6-C, supervising control module, XP10-M input monitor module, XP6-MA six zone interface module, FMM-1, FMM-101, FZM-1, FSM-101, FDM-1, FTM-1 monitor modules, FCM-1, FRM-1 control modules, and *FDRM-1 with 2 input/2 output relay module. All devices are intended to be connected between the signaling line circuit of a compatible fire alarm control panel. Refer to listee's data sheet for additional detailed product description and operational considerations.

RATING: 16-33 VDC Primary

INSTALLATION: In accordance with listee's printed installation instructions, applicable codes & ordinances and in manner acceptable to the authority having jurisdiction.

MARKING: Listee's name, product number and UL label.

APPROVAL: Listed as control unit accessories for use with listee's separately listed compatible fire alarm control units. Model FTM-1 is intended to be used with Notifier Models NFS-640, NFS2-640 (CSFM Listing No. 7165-0028:214), NFS-3030, NFS2-3030 (CSFM Listing No. 7165-0028:224) Fire Alarm Control Units.

NOTE: If an external power supply is used for Model XP6-MA, the negative of the external power supply is referenced to the negative of the auxiliary supply of the compatible control panel. This is done in order to detect ground faults on the initiating circuit.

*Rev. 10-24-11 mt



This listing is based upon technical data submitted by the applicant. CSFM Fire Engineering staff has reviewed the test results and/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other

Date Issued: **July 01, 2017**

Listing Expires **June 30, 2018**

Authorized By: **DAVID CASTILLO**, Program Coordinator
Fire Engineering Division

FCM-1(A) & FRM-1(A) Series

Control and Relay Modules




Intelligent / Addressable Devices

General

FCM-1(A) Control Module: The FCM-1(A) Addressable Control Module provides Notifier intelligent fire alarm control panels a circuit for Notification Appliances (horns, strobes, speakers, etc.). Addressability allows the FCM-1(A) to be activated, either manually or through panel programming, on a select (zone or area of coverage) basis.

FRM-1(A) Relay Module: The FRM-1(A) Addressable Relay Module provides the system with a dry-contact output for activating a variety of auxiliary devices, such as fans, dampers, control equipment, etc. Addressability allows the dry contact to be activated, either manually or through panel programming, on a select basis.

FlashScan® (U.S. Patent 5,539,389) is a communication protocol developed by NOTIFIER Engineering that greatly enhances the speed of communication between analog intelligent devices. Intelligent devices communicate in a grouped fashion. If one of the devices within the group has new information, the panel CPU stops the group poll and concentrates on single points. The net effect is response speed greater than five times that of other designs.

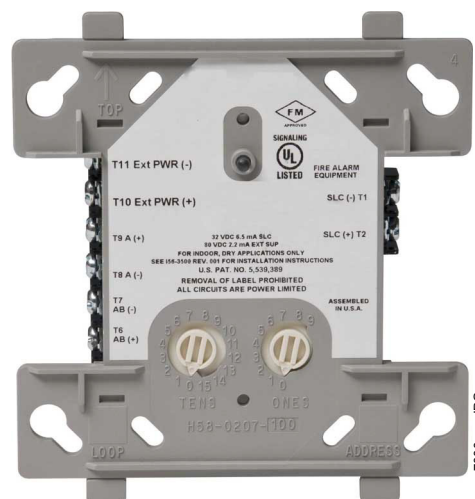

FCM-1(A)

Features

- Built-in type identification automatically identifies these devices to the control panel.
- Internal circuitry and relay powered directly by two-wire SLC loop. The FCM-1(A) module requires power (for horns, strobes, etc.), or audio (for speakers).
- Integral LED “blinks” green each time a communication is received from the control panel and turns on in steady red when activated.
- LED blink may be deselected globally (affects all devices).
- High noise immunity (EMF/RFI).
- The FCM-1(A) may be used to switch 24-volt NAC power, audio (up to 70.7 Vrms).
- Wide viewing angle of LED.
- SEMS screws with clamping plates for wiring ease.
- Direct-dial entry of address 01– 159 for FlashScan loops, 01 – 99 for CLIP mode loops.
- Speaker, and audible/visual applications may be wired for Class B or A (Style Y or Z).

Applications

The FCM-1(A) is used to switch 24 VDC audible/visual power, high-level audio (speakers). The FRM-1(A) may be programmed to operate dry contacts for applications such as door holders or Air Handling Unit shutdown, and to reset four-wire smoke detector power.

NOTE: Refer to the SLC Manual (PN 51253) for details regarding releasing applications with the FCM-1(A). Refer to the FCM-1-REL datasheet (DN-60390) for new FlashScan® releasing applications.

Construction

- The face plate is made of off-white heat-resistant plastic.
- Controls include two rotary switches for direct-dial entry of address (01-159).

- The FCM-1(A) is configured for a single Class B (Style Y) or Class A (Style Z) Notification Appliance Circuit.
- The FRM-1(A) provides two Form-C dry contacts that switch together.

Operation

Each FCM-1(A) or FRM-1(A) uses one of 159 possible module addresses on a SLC loop (99 on CLIP loops). It responds to regular polls from the control panel and reports its type and status, including the open/normal/short status of its Notification Appliance Circuit (NAC). The LED blinks with each poll received. On command, it activates its internal relay. The FCM-1(A) supervises Class B (Style Y) or Class A (Style Z) notification or control circuits.

Upon code command from the panel, the FCM-1(A) will disconnect the supervision and connect the external power supply in the proper polarity across the load device. The disconnection of the supervision provides a positive indication to the panel that the control relay actually turned ON. The external power supply is always relay isolated from the communication loop so that a trouble condition on the external power supply will never interfere with the rest of the system.

Rotary switches set a unique address for each module. The address may be set before or after mounting. The built-in TYPE CODE (not settable) will identify the module to the control panel, so as to differentiate between a module and a sensor address.

Specifications for FCM-1(A)

Normal operating voltage: 15 to 32 VDC.

Maximum current draw: 6.5 mA (LED on).

Average operating current: 350 μ A direct poll, 375 μ A group poll with LED flashing, 485 μ A Max. (LED flashing, NAC shorted.)

Maximum NAC Line Loss: 4 VDC.

External supply voltage (between Terminals T10 and T11): Maximum (NAC): Regulated 24 VDC; Maximum (Speakers): 70.7 V RMS, 50W.

Drain on external supply: 1.7 mA maximum using 24 VDC supply; 2.2 mA Maximum using 80 VRMS supply.

Max NAC Current Ratings: For class B wiring system, the current rating is 3A; For class A wiring system, the current rating is 2A.

Temperature range: 32°F to 120°F (0°C to 49°C).

Humidity range: 10% to 93% non-condensing.

Dimensions: 4.5" (114.3 mm) high x 4" (101.6 mm) wide x 1.25" (31.75 mm) deep. Mounts to a 4" (101.6 mm) square x 2.125" (53.975 mm) deep box.

Accessories: SMB500 Electrical Box; CB500 Barrier

Specifications for FRM-1(A)

Normal operating voltage: 15 to 32 VDC.

Maximum current draw: 6.5 mA (LED on).

Average operating current: 230 µA direct poll; 255 µA group poll.

EOL resistance: not used.

Temperature range: 32°F to 120°F (0°C to 49°C).

Humidity range: 10% to 93% non-condensing.

Dimensions: 4.5" (114.3 mm) high x 4" (101.6 mm) wide x 1.25" (31.75 mm) deep. Mounts to a 4" (101.6 mm) square x 2.125" (53.975 mm) deep box.

Accessories: SMB500 Electrical Box; CB500 Barrier

Agency Listings and Approvals

In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL:** S635
- **ULC:** S3705 (A version only)
- **FM Approved**
- **CSFM:** 7300-0028:0219
- **MEA:** 14-00-E
- **FDNY:** COA #6067, #6065

Contact Ratings for FRM-1(A)

Current Rating	Maximum Voltage	Load Description	Application
3 A	30 VDC	Resistive	Non-Coded
2 A	30 VDC	Resistive	Coded
.9 A	110 VDC	Resistive	Non-Coded
.9 A	125 VDC	Resistive	Non-Coded
.5 A	30 VDC	Inductive (L/R=5ms)	Coded
1 A	30 VDC	Inductive (L/R=2ms)	Coded
.3 A	125 VAC	Inductive (PF=0.35)	Non-Coded
1.5 A	25 VAC	Inductive (PF=0.35)	Non-Coded
.7 A	70.7 VAC	Inductive (PF=0.35)	Non-Coded
2 A	25 VAC	Inductive (PF=0.35)	Non-Coded

NOTE: Maximum (Speakers): 70.7 V RMS, 50 W

Product Line Information

NOTE: "A" suffix indicates ULC Listed model.

FCM-1(A): Intelligent Addressable Control Module.

FRM-1(A): Intelligent Addressable Relay Module.

A2143-20: Capacitor, required for Class A (Style Z) operation of speakers.

SMB500: Optional Surface-Mount Backbox.

CB500: Control Module Barrier — required by UL for separating power-limited and non-power limited wiring in the same junction box as FCM-1(A).

NOTE: For installation instructions, see the following documents:

- *FCM-1(A) Installation document I56-1169.*
- *FRM-1(A) Installation document I56-3502.*
- *Notifier SLC Wiring Manual, document 51253.*

Notifier® and **FlashScan®** are registered trademarks of Honeywell International Inc.

©2011 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.
We try to keep our product information up-to-date and accurate.
We cannot cover all specific applications or anticipate all requirements.
All specifications are subject to change without notice.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.
www.notifier.com



Made in the U.S. A.

CALIFORNIA DEPARTMENT OF FORESTRY & FIRE PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING - BUILDING MATERIALS LISTING PROGRAM



LISTING SERVICE

LISTING No. 7300-0028:0261 Page 1 of 1

CATEGORY: 7300 -- FIRE ALARM CONTROL UNIT ACCESSORIES/MISC. DEVICES

LISTEE: NotifierOne Fire-Lite Place, Northford, CT 06472-1653
Contact: Vladimir Kireyev (203) 484-6277 Fax (203) 484-7309
Email: vladimir.kireyev@honeywell.com

DESIGN: Model ISO-X Fault Isolator Module. Refer to listee's data sheet for detailed product description and operational considerations.

RATING: 15-32 VDC

INSTALLATION: In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction.

MARKING: Listee's name, model number, electrical rating, and UL label.

APPROVAL: Listed as control unit accessories for use with separately listed Notifier Fire Alarm Control units. Refer to listee's Installation Instruction Manual for details.

NOTE: FORMERLY: 7300-1653:192

*Rev. 08-11-2009 fm



This listing is based upon technical data submitted by the applicant. CSFM Fire Engineering staff has reviewed the test results and/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other

Date Issued: **July 01, 2016**

Listing Expires **June 30, 2017**

Authorized By: **DAVID CASTILLO**, Program Coordinator
Fire Engineering Division

ISO-X Fault Isolator Module

Section: Intelligent Addressable Devices

GENERAL

The NOTIFIER ISO-X Fault Isolator Module is used with the NFS-3030, AM2020, AFP1010, NFS-640, AFP-400, AFP-300, AFP-200, AFP-100 and System 5000 (equipped with an AIM-200 module) to protect the system against wire-to-wire short circuits on the SLC loops.

FEATURES


- Powered by SLC loop directly, no external power required.
- Mount in standard 4.0" (10.16 cm) square (2.125" [5.398 cm] deep) junction boxes.
- Integral LED blinks to indicate normal condition. Illuminates steady when short circuit condition is detected.
- High noise (EMF/RFI) immunity.
- Wide viewing angle of LED.
- SEMS screws with clamping plates for ease of wiring.
- Opens SLC loop automatically on detection of short, preventing the short from causing failure of the entire loop.
- Automatically resets on correction of short.
- Supports Style 4, 6, or 7 wiring.

APPLICATIONS

The Fault Isolator Modules should be spaced between groups of sensors in a loop to protect the rest of the loop. Use to isolate short circuit problems within a section of a loop so that other sections can continue to operate normally. The ISO-X supports a maximum of 25 devices in-between isolators, except when using relay bases or IPX multisensors.

NOTE ON LOADS PER RELAY BASE AND MULTISENSOR DETECTORS/ISOLATORS/ISOLATOR BASES:

The maximum number of addressable devices between isolators (or B224BI isolator bases) is 25 devices.

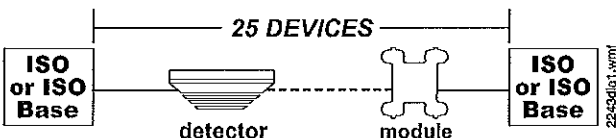

B224RB relay bases and IPX-751 multisensor detectors draw more current than all other intelligent devices. When calculating the 25-device maximum:

- **B224RB** represents **2.5 DEVICES**.
- **IPX-751** in a **standard base** represents **12 DEVICES**.
- **IPX-751** in a **relay base** represents **14.5 DEVICES**.
- **All other addressable devices** represent **1 DEVICE**.

See examples on page 2.

NOTE ON MAXIMUM NUMBER OF DEVICES: Up to 100 ISO-X modules and/or bases can be used per Signaling Line Circuit (SLC) without loss of additional module addresses due to current limitations. Each module or base added beyond 100 units reduces the capacity of an SLC by two address positions. All SLC field de-


vices must have been purchased after February 1995 to meet the aforementioned requirements. If the SLC field devices were purchased prior to February 1995, each ISO-X used reduces the capacity of an SLC by two address positions. Requirements differ as applied to relay bases (see note above).




LISTED

S635 (UOXX)
BP6480 (AMCX, APOU)

ISO-X
Fault
Isolator
Module

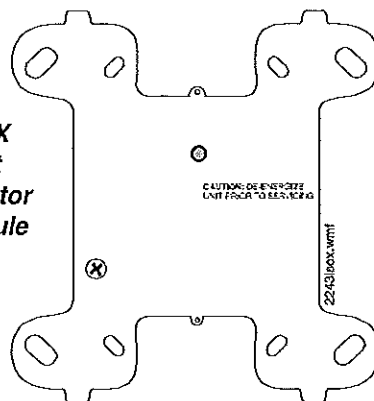

Face
Plate

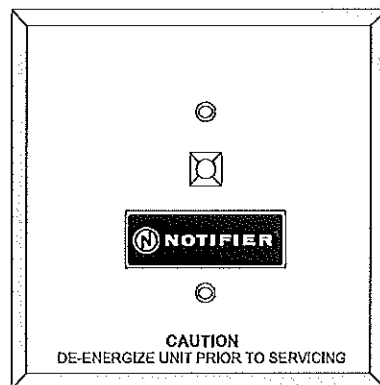

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. For more information, contact NOTIFIER. Phone: (203) 484-7161 FAX: (203) 484-7118

NOTIFIER[®]
by Honeywell

12 Clintonville Road, Northford, Connecticut 06472

ISO 9001
CERTIFIED
ENGINEERING & MANUFACTURING
QUALITY SYSTEMS

CONSTRUCTION

The face plate is made of off-white plastic. Includes yellow LED indicator that pulses when normal and illuminates steady when a short is detected.

OPERATION

Automatically opens circuit when the line voltage drops below four volts. Fault Isolator Modules should be spaced between groups of addressable devices (maximum 25, see notes on page 7) in a loop to protect the rest of the loop. If a short occurs between any two isolators, then both isolators immediately switch to an open circuit state and isolate the groups of sensors between them. The remaining units on the loop continue to fully operate.

In Style 4 loops, the ISO-X is generally used at each T-tap branch, to limit the effect of short circuits on a branch to the devices on that branch. The LED indicator is on continuously during a short circuit condition.

The ISO-X Fault Isolator Module automatically restores the shorted portion of the communications loop to normal condition when the short circuit condition is removed.

INSTALLATION

- Mount on a standard 4" (10.16 cm) mounting junction box which is at least 2.125" (5.398 cm) deep.
- Terminal screws are provided for "in and out" wiring.
- Installation instructions are provided with each module.
- Surface-mount box is available as an option.

SPECIFICATIONS

Operating voltage: 15 – 32 VDC (peak).

Current range: 5 mA for LED latched in alarm.

Standby current: 400 µA maximum, plus supervision current.

Pulsing current: 30 mA for 15 ms (CMX-1, CMX-2, FCM-1).

Temperature range: 32°F to 120°F (0°C to 49°C).

Relative humidity: 10% to 93%.

Weight: 150 grams (5 oz.).

PRODUCT LINE INFORMATION

ISO-X Isolator Module.

SMB500 Surface Mount Backbox.

ARCHITECTURAL/ ENGINEERING SPECIFICATIONS



Fault Isolator Modules shall be provided to automatically isolate wire-to-wire short circuits on an SLC loop. The Fault Isolator Module shall limit the number of modules or detectors that may be rendered inoperative by a short circuit fault on the SLC Loop. If a wire-to-wire short occurs, the Fault Isolator Module shall automatically open-circuit (disconnect) the SLC loop. When the short circuit condition is corrected, the Fault Isolator Module shall automatically reconnect the isolated section of the SLC loop. The Fault Isolator Module shall not require any address-setting, and its operations shall be totally automatic. It shall not be necessary to replace or reset an Fault Isolator Module after its normal operation. The Fault Isolator Module shall mount in a standard 4.0" (10.16 cm) deep electrical box, in a surface-mounted backbox, or in the Fire Alarm Control Panel. It shall provide a single LED which shall flash to indicate that the Isolator is operational and shall illuminate steadily to indicate that a short circuit condition has been detected and isolated.

EXAMPLES OF DEVICE COUNTS

(see notes under Applications on page, 1)

EXAMPLE 1

2243d a2.wmf

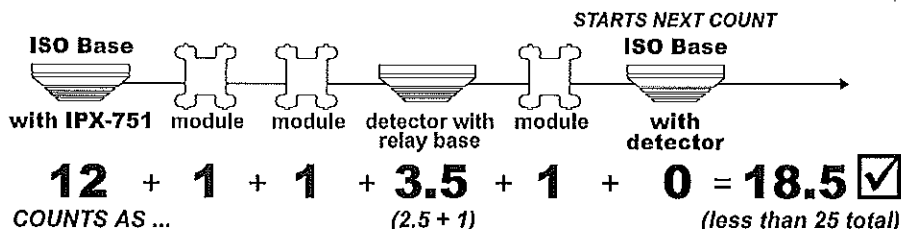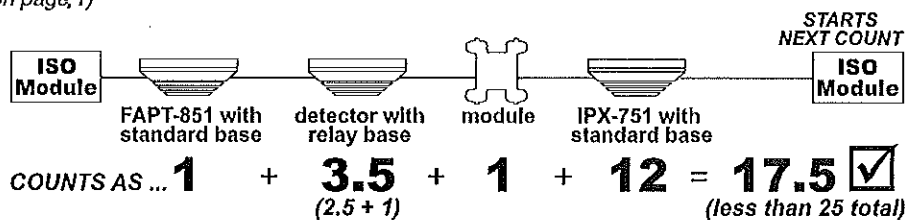


EXAMPLE 2

2243d a3.wmf

EXAMPLE 3

2243d a4.wmf

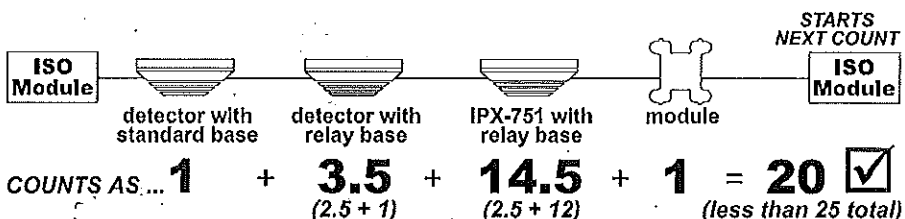

CALIFORNIA DEPARTMENT OF FORESTRY & FIRE PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING - BUILDING MATERIALS LISTING PROGRAM



LISTING SERVICE

LISTING No. 7125-0785:0168

Page 1 of 1

CATEGORY: 7125 -- FIRE ALARM DEVICES FOR THE HEARING IMPAIRED

LISTEE: Cooper Wheelock Inc. 7246 16th St. E., Ste. 105, Sarasota, FL 34243
Contact: Tom Conover (941) 487-2336
Email: thomas.conover@cooperindustries.com

DESIGN: Exceder Series: Models ST strobe, HS horn strobe and HN horn. Model ST is a synchronous and non-synchronous strobe light. Model HS a visual/audible appliance and Model HN is an audible signal appliance. All units followed by R (red) or W (white). Additionally, a 'C' may be added for ceiling models and/or a '-NR' may be added for non-resettable models. For non -NR models and optional 'S' for silver fascia may be added*. Refer to listee's data sheet for additional detailed product description and operational considerations.

RATING: Electrical: 12 VDC/24VDC/FWR
Candela (wall)*: 15, 15/75, 30, 75, 95, 110, 135 & 185
Candela (ceiling)*: 15, 30, 60, 75, 95, 115, 150, & 177

INSTALLATION: In accordance with listee's printed installation instructions, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction. All models are for indoor use and for wall mount only or ceiling mount only*

MARKING: Listee's name, model number, electrical/candela rating, and UL label.

APPROVAL: Listed as horn for fire alarm signaling and strobe, horn/strobe for the hearing impaired when used with separately listed electrically compatible fire alarm control units. Refer to listee's Installation Instructions Manual for details.

*Rev. 9-24-09 fm



This listing is based upon technical data submitted by the applicant. CSFM Fire Engineering staff has reviewed the test results and/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other

Date Issued: **July 01, 2017**

Listing Expires **June 30, 2018**

Authorized By: **DAVID CASTILLO**, Program Coordinator
Fire Engineering Division

Exceder Strobe, Horn Strobe, and Horn Notification Appliances



Description

The Wheelock Exceder Series of notification appliances feature a sleek modern design that will please building owners with reduced total cost of ownership. Installers will benefit from its comprehensive feature list, including the most candela options in one appliance, low current draw, no tools needed for setting changes, voltage test points, 12/24 VDC operation, universal mounting base and multiple mounting options for both new and retrofit construction.

The Wheelock Exceder Series incorporates high reliability and high efficiency optics to minimize current draw allowing for a greater number of appliances on the notification appliance circuit. All strobe models feature an industry first of 8 candela settings on a single appliance. Models with an audible feature 3 sound settings (90, 95, 99 dB). All switches to change settings, can be set without the use of a tool and are located behind the appliance to prevent tampering. Wall models feature voltage test points to take readings with a voltage meter for troubleshooting and AHJ inspection.

The Wheelock Exceder Series of wall and ceiling notification appliances feature a Universal Mounting Base (UMB) designed to simplify the installation and testing of horns, strobes, and combination horn strobes. The separate universal mounting base can be pre-wired to allow full testing of circuit wiring before the appliance is installed and the surface is finished. It comes complete with a Contact Cover for protection against dirt, dust, paint and damage to the contacts. The Contact Cover also acts as a shunting device to allow pre-wire testing for common wiring issues. The Contact Cover is polarized to prevent it from being installed incorrectly and prevents the appliance from being installed while it is on the UMB. When the Contact Cover is removed the circuit will show an open until the appliance is installed. The UMB allows for consistent installation and easy replacement of appliances if required. Wall models provide an optional locking screw for extra secure installation, while the ceiling models provide a captivated screw to prevent the screw from falling during installation.

EAT•N

Powering Business Worldwide


Features

- Sleek modern aesthetics
- Finger slide switches
- Voltage test points
- Multiple voltages
- 3 Audible settings
 - 90, 95, 99 dB
- Industry leading—8 candela settings on 1 device
 - Wall: 15/1575/30/75/95/110/135/185
 - Ceiling: 15/30/60/75/95/115/150/177




- Universal mounting base
 - Ceiling and wall
- Mounts to 5 backbox types: 1 gang, 2 gang, 4" square, 3.5" octal. & 4" octal. (100mm for international customers)

Universal mounting base




Contact cover



Common base for wall and ceiling with 5 mounting options

- Voltage test points for quick troubleshooting and easy spot checking (wall models only)



- Environmentally friendly
 - Low current draw
- Up to 9 models now in 1 appliance draw^①
- 12/24VDC on a single appliance
- Easy to remember model numbers

^① Patented

Note: All CAUTIONS and WARNINGS are identified by the symbol ▲. All warnings are printed in bold capital letters.

▲ WARNING

PLEASE READ THESE SPECIFICATIONS AND ASSOCIATED INSTALLATION INSTRUCTIONS CAREFULLY BEFORE USING, SPECIFYING OR APPLYING THIS PRODUCT. VISIT WWW.COOPERNOTIFICATION.COM OR CONTACT COOPER NOTIFICATION FOR THE CURRENT INSTALLATION INSTRUCTIONS. FAILURE TO COMPLY WITH ANY OF THESE INSTRUCTIONS, CAUTIONS OR WARNINGS COULD RESULT IN IMPROPER APPLICATION, INSTALLATION AND/OR OPERATION OF THESE PRODUCTS IN AN EMERGENCY SITUATION, WHICH COULD RESULT IN PROPERTY DAMAGE, AND SERIOUS INJURY OR DEATH TO YOU AND/OR OTHERS.

General Notes

- Strobes are designed to flash at 1 flash per second minimum over their "Regulated Voltage Range".
- All candela ratings represent minimum effective strobe intensity based on UL Standard 1971.
- Series Exceder Strobe products are Listed under UL Standards 1971 and 464 for indoor use with a temperature range of 32°F to 120°F (0°C to 49°C) and maximum humidity of 93% (± 2%) UL 464 (85% UL 1971).
- Series Exceder horns are under UL Standard 464 for audible signal appliances (Indoor use only).

Compatibility and requirements

- Synchronize using the Wheelock® Sync Modules or panels with built-in Wheelock® Patented Sync Protocol
- Compatible with UL "Regulated Voltage" using filtered VDC or unfiltered VRMS input voltage
- Strobes produce 1 flash per second over the "Regulated Voltage" range

Compliance

- UL 1971, UL 464, ULC, CSFM, FM
- ADA/NFPA/ANSI/OSHA
- RoHS

Table 1. Strobe Ratings per UL Standard 1971

Model	Regulated Voltage Range VDC	UL Max Current ^①												12 VDC	
		24 VDC / 24 FWR												15	15/75
		15	15/75	30	60	75	95	110	115	135	150	177	185		
ST	8.0-33.0	0.057	0.070	0.085	—	0.135	0.163	0.182	—	0.205	—	—	0.253	0.110	0.140
STC	8.0-33.0	0.061	—	0.085	0.103	0.135	0.163	—	0.182	—	0.205	0.253	—	0.110	—

Table 2. Horn Strobe Ratings per UL 1971 & Anechoic at 24 VDC

Model	Regulated Voltage Range VDC	UL Max Current ^① at Anechoic 99 dBA												12 VDC	
		24 VDC												15	15/75
		15	15/75	30	60	75	95	110	115	135	150	177	185		
HS	8.0-33.0	0.082	0.095	0.102	—	0.148	0.176	0.197	—	0.242	—	—	0.282	0.125	0.159
HSC	8.0-33.0	0.082	—	0.102	0.141	0.148	0.176	—	0.197	—	0.242	0.282	—	0.125	—

Model	Regulated Voltage Range VDC	UL Max Current ^① at Anechoic 95 dBA												12 VDC	
		24 VDC												15	15/75
		15	15/75	30	60	75	95	110	115	135	150	177	185		
HS	8.0-33.0	0.073	0.083	0.087	—	0.139	0.163	0.186	—	0.230	—	—	0.282	0.122	0.153
HSC	8.0-33.0	0.073	—	0.087	0.128	0.139	0.163	—	0.186	—	0.230	0.272	—	0.122	—

Model	Regulated Voltage Range VDC	UL Max Current ^① at Anechoic 90 dBA												12 VDC	
		24 VDC												15	15/75
		15	15/75	30	60	75	95	110	115	135	150	177	185		
HS	8.0-33.0	0.065	0.075	0.084	—	0.136	0.157	0.184	—	0.226	—	—	0.267	0.120	0.148
HSC	8.0-33.0	0.065	—	0.084	0.120	0.136	0.157	—	0.184	—	0.226	0.267	—	0.120	—

① UL max current rating is the maximum RMS current within the listed voltage range (16-33 VDC for 24 VDC units). For strobes the UL max current is usually at the minimum listed voltage (16 VDC for 24 VDC units). For audibles the max current is usually at the maximum listed voltage (33 VDC for 24 VDC units). For unfiltered ratings, see installation instructions.

Table 3. Horn Ratings per UL Anechoic

Model	Regulated Voltage Range VDC	99 dB	95 dB	90 dB
HN	16-33.0	0.064	0.044	0.022
HNC	16-33.0	0.084	0.044	0.022
HN	8.0-17.5	0.047	0.026	0.017
HNC	8.0-17.5	0.047	0.026	0.017

Table 4. Specification & Ordering Information

Model	Strobe Candela	Sync w/ Wheelock Power Supplies	DSM or Wheelock Power Supplies	12/24 VDC ^①	Mounting Options
Horn Strobes					
HSR	15/1575/30/75/95/110/135/185	X		X	UMB ^②
HSW	15/1575/30/75/95/110/135/185	X		X	UMB ^②
HSRC	15/30/60/75/95/115/150/177	X		X	UMB ^②
HSWC	15/30/60/75/95/115/150/177	X		X	UMB ^②
Strobes					
STR	15/1575/30/75/95/110/135/185	X		X	UMB ^②
STW	15/1575/30/75/95/110/135/185	X		X	UMB ^②
STRC	15/30/60/75/95/115/150/177	X		X	UMB ^②
STWC	15/30/60/75/95/115/150/177	X		X	UMB ^②
Horn					
HNR		X		X	UMB ^②
HNW		X		X	UMB ^②
HNRC		X		X	UMB ^②
HNWC		X		X	UMB ^②

① 12 VDC models feature 15 & 15/75 settings

② UMB = Universal Mounting Base

Model Legend

HN	=	Horn	R	=	Red
ST	=	Strobe	A	=	Agent Lettering (strobes only)
HS	=	Horn Strobe	AL	=	Alert Lettering (strobes only)
C	=	Ceiling Mount	N	=	No Lettering (strobes only)
W	=	White			

Example 1: STRC = Strobe, Red, Ceiling Mount

Example 2: HSR = Horn Strobe, Red, Wall Mount

Example 3: HSW = Horn Strobe, White, Wall Mount

Example 4: STW-AL = Strobe, White, Wall Mount, Alert Lettering



Example: HSR



Example: HSWC

Architects and Engineers Specifications

The notification appliances shall be Wheelock Exceder Series HS Audible Strobe appliances, Series ST Visual Strobe appliances and Series HN Audible appliances or approved equals. The Series HS and ST Strobes shall be listed for UL Standard 1971 (Emergency Devices for the Hearing-Impaired) for Indoor Fire Protection Service. The Series HS and HN Audibles shall be UL Listed under Standard 464 (Fire Protective Signaling). All Series shall meet the requirements of FCC Part 15 Class B. All inputs shall be compatible with standard reverse polarity supervision of circuit wiring by a Fire Alarm Control Panel (FACP) with the ability to operate from 8 to 33 VDC. Indoor wall models shall incorporate voltage test points for easy voltage inspection.

The Series HS Audible Strobe and ST Strobe appliances shall produce a flash rate of one (1) flash per second over the Regulated Voltage Range and shall incorporate a Xenon flashtube enclosed in a rugged Lexan® lens. The Series shall be of low current design. Where multi-candela appliances are specified, the strobe intensity shall have 8 field selectable settings at 15, 15/75, 30, 75, 95, 110, 135, 185 candela for wall mount and 15, 30, 60, 75, 95, 115, 150, 177 candela for ceiling mount. The selector switch for selecting the candela shall be tamper resistant. The 15/75 candela strobe shall be specified when 15 candela UL Standard 1971 Listing with 75 candela on-axis is required (e.g., ADA compliance). Appliances with candela settings shall show the candela selection in a visible location at all times when installed.

The audible shall have a minimum of three (3) field selectable settings for dBA levels and shall have a choice of continuous or temporal (Code 3) audible outputs.

The Series HS Audible Strobe, ST Strobe and Series HN Audible shall incorporate a patented Universal Mounting Base that shall allow mounting to a single-gang, double-gang, 4-inch square, 3.5-inch octal, 4-inch octal or 100mm European type back boxes. Two wire appliance wiring shall be capable of directly connecting to the mounting base. Continuity checking of the entire NAC circuit prior to attaching any notification appliances shall be allowed. Product shall come with Contact Cover to protect contact springs. Removal of an appliance shall result in a supervision fault condition by the Fire Alarm Control Panel (FACP). The mounting base shall be the same base among all horn, strobe, horn strobe, wall and ceiling models. All notification appliances shall be backwards compatible.

The Series HS and ST wall models shall have a low profile measuring 5.24" H x 4.58" W x 2.19" D. Series HN wall shall measure 5.24" H x 4.58" W x 1.6" D. The Series HSC and STC shall be round and have a low profile with a diameter of 6.68" x 2.63" D. Series HNC ceiling shall have a diameter of 6.68" x 1.50" D.

When synchronization is required, the appliance shall be compatible with Wheelock's DSM Sync Modules, Wheelock Power Supplies or other manufacturer's panels with built-in Wheelock Patented Sync Protocol. The strobes shall not drift out of synchronization at any time during operation. If the sync protocol fails to operate, the strobe shall revert to a non-synchronized flash-rate and still maintain (1) flash per second over its Regulated Voltage Range. The appliance shall also be designed so that the audible signal may be silenced while maintaining strobe activation when used with Wheelock synchronization protocol.

Wall Appliances: UL Standard 1971, UL Standard 464, California State Fire Marshal (CSFM), ULC, FM, RoHS

Ceiling Appliances: UL Standard 1971, UL Standard 464, California State Fire Marshal (CSFM), ULC, FM, RoHS

Note: Due to continuous development of our products, specifications and offerings are subject to change without notice in accordance with Cooper Wheelock Inc., dba Cooper Notification standard terms and conditions.



WE ENCOURAGE AND SUPPORT NICET CERTIFICATION
3 YEAR WARRANTY

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

Eaton
Cooper Notification
273 Branchport Ave.
Long Branch, NJ 07740
CooperNotification.com

© 2014 Eaton
All Rights Reserved
Printed in USA
Publication No. TD001017EN
October 2014



Eaton is a registered trademark.

All other trademarks are property of their respective owners.

CALIFORNIA DEPARTMENT OF FORESTRY & FIRE PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING - BUILDING MATERIALS LISTING PROGRAM



LISTING SERVICE

LISTING No. 7125-0785:0131

Page 1 of 2

CATEGORY: 7125 -- FIRE ALARM DEVICES FOR THE HEARING IMPAIRED

LISTEE: Cooper Wheelock Inc. 7246 16th St. E., Ste. 105, Sarasota, FL 34243
Contact: Tom Conover (941) 487-2336
Email: thomas.conover@cooperindustries.com

DESIGN: Models AS-1215, -2415, -1230, -2430, -121575, -241575, -2475 and -24110 audible/strobes for the hearing impaired followed by any three alpha/numeric characters indicating lens orientation, lettering and color.

Models AS-1215W, -2415W, -1230W, -2430W, -121575W, -241575W, -2475W and -24110W audible/strobes for the hearing impaired followed by any three alpha/numeric characters indicating lens orientation, lettering and color. These units with suffix -W are for wall mount only. *Models AS-121575W and AS-241575W lens color may be white, red, blue, green, or amber.

Models AS-2415C, -2430C, -2475C and -24100C audible/strobes for the hearing impaired followed by two alpha/numeric characters indicating lens lettering, orientation and color. These units are intended for ceiling mount only.

Model AH-12, -24, AH-12WP, -24WP audible appliances (no strobe), followed by an alpha or numeric character indicating product color.

Model AS-24MCW and AS-24MCC audible/strobe, followed by any two alpha or numeric character indicating lettering and product color. *Lens color may be white, red, blue, green, or amber.

Models ASWP-2475W and *ASWP-2475C audible/strobe with integral private mode fire/emergency visual signaling for non-hearing impaired applications. Lens color may be white, red, blue, green, and amber. Both models are suitable for outdoor use when mounted on the Model WPBB back box.

Models AS-24MCWH, AS-24MCCH, *ASWP-24MCWH, and *ASWP-24MCCH audible/strobes for the hearing impaired followed by two alpha/numeric characters indicating lens lettering and product color. Units with suffix CH are for ceiling mount only. Units with suffix WH are for wall mount only. *Lens color may be white, red, blue, green, or amber.

Refer to the listee's data sheet for detailed product description and operational considerations.

*Rev. 10-01-07



This listing is based upon technical data submitted by the applicant. CSFM Fire Engineering staff has reviewed the test results and/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other

Date Issued: **July 01, 2017**

Listing Expires **June 30, 2018**

Authorized By: **DAVID CASTILLO**, Program Coordinator
Fire Engineering Division

Weatherproof Appliances - Series AH Audibles, AS Audible Strobes, MT Multitone Strobes, RSS Strobes and ET70 Speaker Strobes and Weatherproof Mounting Accessories



Description:

Designed for life safety, performance and reliability, Cooper Notification's Wheelock cost effective weatherproof notification appliances include:

Weatherproof Appliances	Series
Strobes	RSSWP
Horn Strobes	ASWP
Horns	AH-24WP, AH-12WP
Multitone Horn Strobes	MTWP
Multitone Horns	MT
Speaker Strobes	ET70WP
Speakers	ET-1010

All strobe models are UL dual listed - meeting both UL1638 and UL1971 requirements. As dual listed appliances, these weatherproof strobes, horn strobes and speaker strobes are listed for outdoor applications under UL 1638 as well as under UL 1971, the Standard for Safety Signaling Devices for Hearing Impaired. With an extended temperature range of -31°F to 150°F (-35°C to 66°C), Wheelock weatherproof appliances meet or exceed UL outdoor test requirements for rain, humidity and corrosion resistance while providing multiple strobe intensity options, including the highest strobe ratings available for area coverage per NFPA 72 strobe spacing tables (up to 185 candela for wall mounting and 177 candela for ceiling mounting).

To enable weatherproof mounting, Cooper Notification provides the industry's widest choice of mounting options for surface or unique semi-flush installation. Models are available for surface mounting to Wheelock weatherproof backboxes on walls or ceilings. The optional WP-KIT allows the weatherproof backboxes (IOB, WPBB or WPSBB) to be mounted to a recessed electrical box for concealed conduit installation. For semi-flush installation, the WPA* and WFPA* kits allow a customer to mount the weatherproof appliances to a recessed electrical box without the need for an external weatherproof backbox. See the Backboxes, Plates and Gaskets Table on page three of this document for a summarization of these mounting options and the required accessories.

All models may be synchronized using the Wheelock DSM Sync Modules, Wheelock Power Supplies or other manufacturers panels incorporating the Wheelock Patented Sync Protocol. The horn output of horn strobes can be independently controlled on 2-wire circuits using the Wheelock patented sync protocol. MTWP horn strobe models are 4-wire appliances; the strobes can be synchronized while the audible can be connected to a coded fire alarm system or can be set to produce any of eight selectable tones.

Features:

- Approvals include: UL Standards 1971, 1638, 464 and 1480 California State Fire Marshal (CSFM), New York City (MEA), Factory Mutual (FM), Chicago (BFP) and ULC. See agency approvals by model number on page two of this document
- Compliance with the following requirements: NFPA, UFC, ANSI 117.1, OSHA Part 29, 1910.165, ADA
- Weatherproof with extended temperature range of -40°F to 150°F (-40°C to 66°C)*
- Dual Listed strobe models (UL 1638 and UL 1971)
- Industry's highest strobe candela options
- Synchronize using the Wheelock Sync Modules or panels with built-in Wheelock Patented Sync Protocol
- Models with field selectable tone, dBA and candela settings
- Wall or ceiling mounting options
- Surface or semi-flush mounting
- IN/OUT wiring termination accepting two #12-18 AWG wires at each terminal

The series RSSWP, ASWP, AH-24WP, MTWP-2475W, and MT-12/24 have UL / ULC approval down to -40°F. The ET-1010 and ET70WP have UL approval down to -40°F. The AH-12WP has UL approval down to -31°F.



E5946
S5391
S2652



151-92-E



7125-0785:131 (ASWP)
7125-0785:146 (ET70WP)
7125-0785:156 (MTWP)
7300-0785:154 (RSSWP)



APPROVED

NOTE: All CAUTIONS and WARNINGS are identified by the symbol ▲. All warnings are printed in bold capital letters.

▲ WARNING: PLEASE READ THESE SPECIFICATIONS AND ASSOCIATED INSTALLATION INSTRUCTIONS CAREFULLY BEFORE USING, SPECIFYING OR APPLYING THIS PRODUCT. VISIT WWW.COOPERNOTIFICATION.COM OR CONTACT COOPER WHEELLOCK FOR THE CURRENT INSTALLATION INSTRUCTIONS. FAILURE TO COMPLY WITH ANY OF THESE INSTRUCTIONS, CAUTIONS OR WARNINGS COULD RESULT IN IMPROPER APPLICATION, INSTALLATION AND/OR OPERATION OF THESE PRODUCTS IN AN EMERGENCY SITUATION, WHICH COULD RESULT IN PROPERTY DAMAGE, AND SERIOUS INJURY OR DEATH TO YOU AND/OR OTHERS.

General Notes:

- Strobes are designed to flash at 1 flash per second minimum over their UL Listed Regulated Voltage Range.
- All candela ratings represent minimum effective Strobe intensity based on UL Standards 1971 and 1638 as indicated in candela ratings table.

Wall Mount



Strobe		Order Code
RSSWP-2475W-FR	Red	9013
RSSWP-2475W-FW	White	3034
RSSWP-24MCWH-FR	Red	5161
RSSWP-24MCWH-FW	White	5165

Audible Strobe		
ASWP-2475W-FR	Red	9012
ASWP-24MCWH-FR	Red	5137
ASWP-24MCWH-FW	White	5140

Multi-tone Strobe		
MTWP-2475W-FR	Red	8420
MTWP-2475W-FW	White	3112
MTWP-24MCWH-FR	Red	5132
MTWP-24MCWH-FW	White	5134

Speaker Strobe		
ET70WP-2475W-FR	Red	9077
ET70WP-2475W-FW	White	3179
ET70WP-24185W-FR	Red	4885
ET70WP-24185W-FW	White	4891
ET70WP-24135W-FR	Red	4872
ET70WP-24135W-FW	White	4875

Ceiling Mount



Strobe		Order Code
RSSWP-2475C-FR	Red	4338
RSSWP-2475C-FW	White	4446
RSSWP-24MCCH-FR	Red	5167
RSSWP-24MCCH-FW	White	5187

Audible Strobe		
ASWP-2475C-FR	Red	4251
ASWP-2475C-FW	White	4502
ASWP-24MCCH-FR	Red	5149
ASWP-24MCCH-FW	White	5157

Multi-tone Strobe		
MTWP-2475C-FR	Red	4457
MTWP-2475C-FW	White	4478
MTWP-24MCCH-FR	Red	5102
MTWP-24MCCH-FW	White	5122

Speaker Strobe		
ET70WP-2475C-FR	Red	4452
ET70WP-2475C-FW	White	4454
ET70WP-24177C-FR	Red	4845
ET70WP-24177C-FW	White	4859
ET70WP-24115C-FR	Red	4550
ET70WP-24115C-FW	White	4732

Wall or Ceiling Mount



Audible		Order Code
AH-24WP-R	Red	7416
AH-12WP-R	Red	7415

Horn		
MT-12/24-R	Red	5023

Speaker		
ET-1010-R	Red	3135
ET-1010-W	White	3137

UL Max. Current	AH	
	24 VDC	12 VDC
High (99) dBA	0.080	0.192
Med (95) dBA	0.043	0.108
Low (90) dBA	0.021	0.058

UL Reverberant dBA @ 10 Feet							
Watts	1/8	1/4	1/2	1	2	4	8
ET-1010	77	80	83	86	87	92	94
ET70WP	78	81	84	87	90	93	95

Candela Ratings							
Series	UL 1971	UL 1638 @ 77°F	UL 1638 @ -40°F	RSS, ET70WP and MTWP UL Max Current (Strobe Only)	ASWP		
					High	Med	Low
2475W	30**	180	115	0.138	0.168	0.155	0.150
2475C	15	180	115	0.138	0.168	0.155	0.150
MCWH	135	135	56	0.300	0.355	0.340	0.335
	185	185	77	0.420	0.480	0.465	0.460
MCCH	115	115	47	0.300	0.355	0.340	0.335
	177	177	73	0.420	0.480	0.465	0.460
24185	185	185	77	0.420	**Wall mount rating only		
24177	177	177	73	0.420			

UL Max. Current (Audible)	MTWP/MT 24 VDC		MT 12 VDC	
dBA	HI	STD	HI	STD
Horn	0.108	0.044	0.177	0.034
Bell	0.053	0.024	0.095	0.020
March Time	0.104	0.038	0.142	0.034
Code 3 Horn	0.091	0.035	0.142	0.034
Code 3 Tone	0.075	0.035	0.105	0.021
Slow Whoop	0.098	0.037	0.142	0.035
Siren	0.104	0.036	0.152	0.030
Hi/Lo	0.057	0.025	0.114	0.026

Model Number	Agency Approvals				
Strobe	UL	MEA	CSFM	FM	BFP
RSSWP-2475	X	X	X	X	-
RSSWP-24MCWH	X	-	X	-	-
RSSWP-24MCCH	X	-	X	-	-
Audible Strobe					
ASWP-2475	X	X	X	X	X
ASWP-MCWH	X	-	X	-	-
ASWP-MCCH	X	-	X	-	-
Multitone Strobe					
MTWP-2475	X	X	X	X	-
MTWP-MCWH	X	-	X	-	-
MTWP-MCCH	X	-	X	-	-
Horns/Audibles					
AH-24WP	X	X	X	X	X
AH-12WP	X	X	X	X	X
MT-12/24	X	X	X	X	X
Speaker Strobe					
ET70WP-2475	X	-	X	X	-
ET70WP-185	X	-	X	X	-
ET70WP-177	X	-	X	X	-
ET70WP-115	X	-	X	X	-
ET70WP-135	X	-	X	X	-

Mounting Accessories



Gasket Kit

WP-KIT Order Code 4486

Flush Plates

WFA-R	Red	4698
WFA-W	White	4701
WFP-R	Red	4696
WFP-W	White	4697

Backboxes

IOB-R*	Red	5046
IOB-W*	White	5047
WPSBB-R*	Red	9751
WPSBB-W*	White	3033
WPBB-R*	Red	9014
WPBB-W*	White	4692
WBB-R	Red	2959
WBB-W	White	2960


Mounting Options:

	Backboxes, Plates, Gasket Kits		
	Surface Mount		Flush Mount
	Exposed Conduit	Concealed Conduit	
RSSWP Strobes	WPSBB	WPSBB + WP-KIT	WFP
ET70WP Speaker Strobes	IOB	IOB + WP-KIT	WFP
ASWP Horn Strobes	WPBB	WPBB + WP-KIT	WFA
AHWP Horns	WBB	-	WFP
ET-1010 Speakers	WBB	-	WFP
MTWP Multitone Horn Strobes	IOB	IOB + WP-KIT	WFP
Multitone Horn	IOB	IOB + WP-KIT	WFP


*IOB, WPSBB and WPBB models include weep holes and plug in the event that moisture may have entered the appliance

Wiring Diagrams


SERIES MTWP AUDIBLE APPLIANCE AND STROBE OPERATE IN UNISON. RED AND BLACK SHUNT-WIRES ARE SUPPLIED.

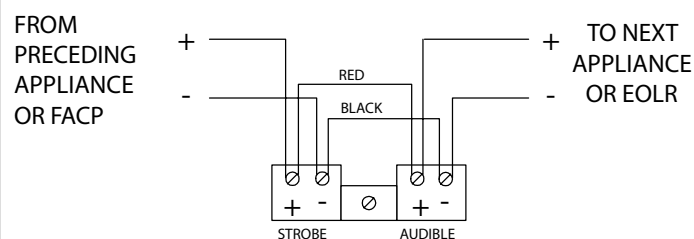


SERIES RSSWP, ASWP, AHWP, MTWP AND MT-12/24 APPLIANCES

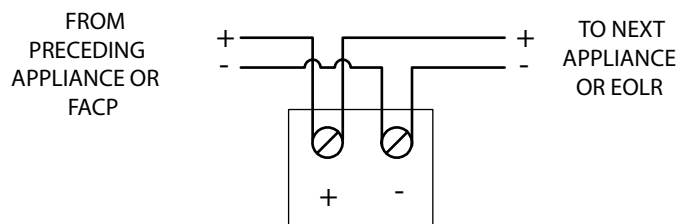

SERIES MTWP APPLIANCES SYNCHRONIZED STROBE OPERATION WITH CODED FACP

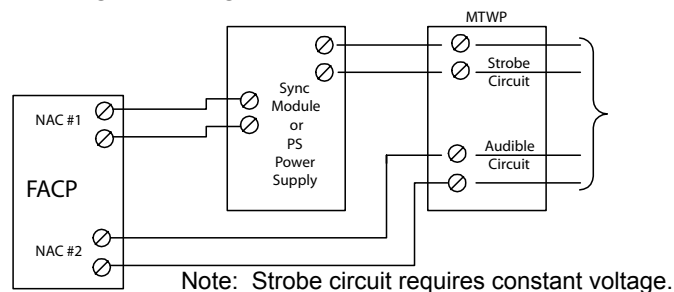

SERIES RSSWP/ASWP APPLIANCES SYNCHRONIZED W/ DSM MODULE SINGLE CLASS "A" NAC CIRCUIT

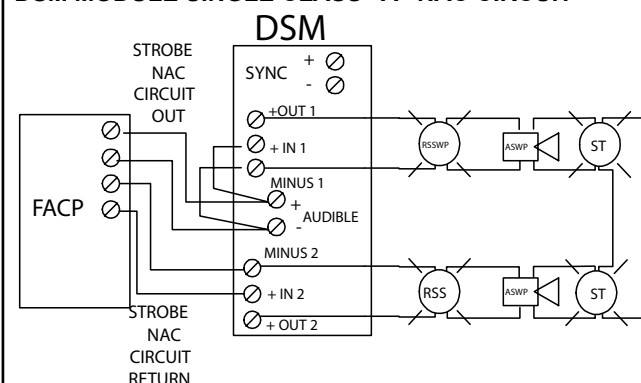

Note: Models are available in Red or White. Contact Customer Service for Order Code and Delivery.

#Refer to Data Sheet S7000 for Mounting Options

NOTE: Due to continuous development of our products, specifications and offerings are subject to change without notice in accordance with Cooper Wheelock Inc. dba Cooper Notification standard terms and conditions.

ARCHITECTS AND ENGINEERS SPECIFICATIONS

General

Weatherproof notification appliances shall be UL listed for outdoor use. Weatherproof Strobe appliances shall be listed under UL Standard 1638 (Standard for Visual Signaling Appliances) for Indoor/Outdoor use and UL Standard 1971 (Standard for Safety Signaling Devices for Hearing Impaired). The appliances shall be available for optional wall mounting or ceiling mounting to weatherproof backboxes using either exposed conduit or concealed conduit, or semi-flush mounting to a recessed electrical box in walls or ceilings using Wheelock mounting accessories.

Weatherproof Strobes

Weatherproof Strobe appliances shall produce a minimum flash rate of 60 flashes per minute over the UL Regulated Voltage Range of 16 to 33 VDC and shall incorporate a Xenon flashtube. The weatherproof strobes shall be available with UL 1971 candela ratings up to 185 cd for wall mounting and 177 cd for ceiling mounting. UL 1638 candela ratings up to 180 cd at 77°F shall be available. The strobes shall operate over an extended temperature range of -40°F to 150°F (-40°C to 66°C) and be listed for maximum humidity of 95% RH. Strobe inputs shall be polarized for compatibility with standard reverse polarity supervision of circuit wiring by a Fire Alarm Control Panel (FACP).

Weatherproof Audibles and Audible/Strobe Combinations Weatherproof horns and multitone audibles shall be listed for Indoor/Outdoor use under UL Standard 464. The horns shall be able to produce a continuous output or a temporal code-3 output that can be synchronized. The horns shall have at least 3 sound level settings. Horn/Strobe combinations shall be able to be synchronized on a single NAC.

Multitone audibles shall be able to produce 8 distinct tones selectable by dip switch and shall have at least 2 sound level settings. Multitone Audible/Strobe combinations shall have independent inputs for the audible and strobe. The strobes shall be able to be synchronized. The audibles shall be able to be coded when operated on a separate NAC.

Weatherproof Speakers and Speaker/Strobes

Weatherproof speakers and speaker/strobes shall be listed for Indoor/Outdoor use under UL Standard 1480. All speakers shall provide field selectable taps for 1/8W to 8W operation for either 25 VRMS or 70 VRMS audio systems and shall incorporate a sealed back construction for extra protection and improved audibility. Speakers without strobes shall be Wheelock Series ET-1010. They shall be listed to produce up to 94 dBA and shall incorporate a vandal resistant grille design. Speaker with strobes shall be Wheelock Series ET70WP. They shall be available for surface or semi-flush mounting to walls or ceilings and shall be listed to produce up to 93 dBA.

Synchronization Modules

When synchronization of strobes or temporal code-3 audibles is required, the appliances shall be compatible with the Wheelock Series DSM Sync Modules, Wheelock Power Supplies or other manufacturers panels with built-in Wheelock Patented Sync Protocol. The strobes and audibles shall not drift out of synchronization at any time during operation.

Series ASWP audibles and strobes shall be able to be synchronized on a 2-wire circuit with the ability to silence the audible if required. The strobes on Series MT multitone audible/strobe appliances shall be able to be synchronized and shall be able to be operated on a separate circuit from the audibles while the audible circuit is connected to a coded or continuous NAC.

Weatherproof Mounting Accessories

Weatherproof mounting options shall include surface mounting or semi-flush mounting to walls or ceilings. Surface mounted appliances shall mount to Wheelock IOB, WBB, WPBB or WPSBB weatherproof backboxes using either exposed conduit or concealed conduit. For concealed conduit the weatherproof backbox shall be mounted to a recessed electrical box with Wheelock's WP-KIT to provide a weatherproof seal for the electrical box. Semi-flush mounted appliances shall mount to a recessed electrical box using Wheelock WFP or WFP-A flush plates to provide a weatherproof seal between the electrical box and the appliance.



WE ENCOURAGE AND SUPPORT NICET CERTIFICATION
3 YEAR WARRANTY

S9004 WP 11/12

NJ Location

273 Branchport Ave.
Long Branch, NJ 07740
P: 800-631-2148
F: 732-222-8707
www.coopernotification.com

Cooper Notification is Wheelock®



COOPER Notification

CALIFORNIA DEPARTMENT OF FORESTRY & FIRE PROTECTION
OFFICE OF THE STATE FIRE MARSHAL
FIRE ENGINEERING - BUILDING MATERIALS LISTING PROGRAM



LISTING SERVICE

LISTING No. 7161-0859:0101

Page 1 of 1

CATEGORY: 7161 -- CABLES-FIRE PROTECTIVE SIGNALING

LISTEE: West Penn Wire 2833 W Chestnut St, Washington, PA 15301
Contact: Mark Sams (724) 222-7060 Fax (724) 229-1151
Email: mark.sams@westpenn-cdt.com

DESIGN: Types FPL and FPLP power limited fire protective signaling cable. Refer to listee's data sheet for detailed product description and operational considerations.

INSTALLATION: In accordance with listee's printed installation instructions, NEC Article 760, applicable codes and ordinances and in a manner acceptable to the authority having jurisdiction.

MARKING: Listee's name, type, NEC rating and UL label.

APPROVAL: Listed as power-limited fire protective signaling cable.

*Rev. 05-23-2005



This listing is based upon technical data submitted by the applicant. CSFM Fire Engineering staff has reviewed the test results and/or other data but does not make an independent verification of any claims. This listing is not an endorsement or recommendation of the item listed. This listing should not be used to verify correct operational requirements or installation criteria. Refer to listee's data sheet, installation instructions and/or other

Date Issued: **July 01, 2017**

Listing Expires **June 30, 2018**

Authorized By: **DAVID CASTILLO**, Program Coordinator
Fire Engineering Division

Technical Data Sheet Fire Alarm Cables



WEST PENN WIRE

2833 West Chestnut Street
Washington, PA 15301
Toll Free: (800) 245-4964
Fax: (724) 222-6420
www.westpenn-wpw.com

PART NUMBER:	994S
DESCRIPTION:	14/2 Stranded bare copper conductors, unshielded with an overall jacket.
NEC RATING:	FPLR, NEC Article 760
APPROVALS:	(UL) or (ETL)us Listed
APPLICATION:	Indoor for (Audio Circuits, Control Circuits, Initiating Circuits, Notification Circuits)

Construction Parameters:

Conductor	14 AWG Bare Copper
Stranding	Stranded
Insulation Material	PVC
Insulation Thickness	0.012" Nom.
Number of Conductors	2
Shield	None
Drain	None
Jacket Material	PVC
Jacket Thickness	0.015" Nom.
Overall Cable Diameter	0.197" Nom.
Approximate Cable Weight	42 Lbs/1M' Nom.
Flame Rating	UL 1666 Riser Flame Test

Electrical & Environmental Properties:

Temperature Rating	-20deg C to 60deg C
Operating Voltage	300 V RMS
Max.Capacitance Between Conductors @ 1 KHz	30 pf/ft Nom.
DC Resistance per Conductor @ 20deg C	2.43 Ohms/1M' Nom.
Insulation Colors	Black, Red
Jacket Color	Red, Black, Blue, White, Yellow
RoHS Compliant	Yes

Mechanical Properties:

Max. Recommended Pull Tension	99.4 lbs.
Min. Bend Radius (Install)	2"

Specification Issue Date: 7/06

This document is the property of West Penn Wire.
The information contained herein is considered
Proprietary and not to be reproduced by any means
Without written consent of West Penn Wire

Standard Lengths are 1000ft.
The Jacket is sequentially footmarked.
The information presented here is, to the best of our
knowledge, is true and accurate. However, since
conditions of use are beyond our control, all
recommendations or suggestions are presented
without guarantee or responsibility on our part. We
disclaim all liability in connection with the use of
information contained herein or otherwise.

Technical Data Sheet

Fire Alarm Cables- Addressable

WEST PENN WIRE



2833 West Chestnut Street
Washington, PA 15301
Toll Free: (800) 245-4964
Fax: (724) 222-6420
www.westpenn-wpw.com

PART NUMBER:	D990
DESCRIPTION:	16/2 Solid bare copper conductors, unshielded with an overall jacket.
NEC RATING:	FPLR, NEC Article 760
APPROVALS:	(UL) Listed
APPLICATION:	Indoor data fire alarm cable for (Data Circuits, Initiating Circuits, Notification Circuits, Addressable Systems)

Construction Parameters:

Conductor	16 AWG Bare Copper
Stranding	Solid
Insulation Material	Copolene
Insulation Thickness	0.015" Nom.
Number of Conductors	2
Shield	None
Drain	None
Jacket Material	PVC
Jacket Thickness	0.030" Nom.
Overall Cable Diameter	0.223" Nom.
Approximate Cable Weight	29 Lbs/1M' Nom.
Flame Rating	UL 1666 Riser Flame Test

Electrical & Environmental Properties:

Temperature Rating	-20deg C to 60deg C
Operating Voltage	300 V RMS
Max.Capacitance Between Conductors @ 1 KHz	18 pf/ft Nom.
DC Resistance per Conductor @ 20deg C	4.2 Ohms/1M' Nom.
Velocity of Propagation	71% Nom.
Insulation Colors	Black, Red
Jacket Color	Red
RoHS Compliant	--

Mechanical Properties:

Max. Recommended Pull Tension	62.4 lbs.
Min. Bend Radius (Install)	2.25"



Specification Issue Date: 7/06

This document is the property of West Penn Wire.
The information contained herein is considered
Proprietary and not to be reproduced by any means
Without written consent of West Penn Wire

Standard Lengths are 1000ft.
The Jacket is sequentially footmarked.
The information presented here is, to the best of our
knowledge, is true and accurate. However, since
conditions of use are beyond our control, all
recommendations or suggestions are presented
without guarantee or responsibility on our part. We
disclaim all liability in connection with the use of
information contained herein or otherwise.

Technical Data Sheet

Aquaseal® Fire-Alarm Cables



WEST PENN WIRE

2833 West Chestnut Street
Washington, PA 15301
Toll Free: (800) 245-4964
Fax: (724) 222-6420
www.westpenn-wpw.com



PART NUMBER:	AQ225
DESCRIPTION:	16/2 Stranded bare copper conductors, overall unshielded with Aquaseal tape and overall jacket.
NEC RATING:	FPL – PLTC, CL3 NEC Article 760 And 725
APPROVALS:	(UL) Listed - Direct Burial
APPLICATION:	Materials suitable for outdoor use, and indoor trays, allows a variety of uses for (Low voltage industrial process control circuits, Power-Limited circuits, Power-Limited fire alarm circuits, Power-Limited tray cable PLTC)

Construction Parameters:

Conductor	16 AWG Bare Copper
Stranding	7x24
Insulation Material	PVC with Nylon
Insulation Thickness	PVC 0.015" Nom. Nylon .005" Nom.
Number of Conductors	2 (1 Pair)
Shield	None
Drain	None
Water-Blocking Tape	2 Ply water swellable tape
Jacket Material	Sunlight/ Moisture Resistant PVC
Jacket Thickness	0.040" Nom.
Overall Cable Diameter	0.295" Nom.
Approximate Cable Weight	48 Lbs/1M' Nom.
Flame Rating	UL 1685 Vertical Tray

Electrical & Environmental Properties:

Temperature Rating	-20deg C to 90deg C
Operating Voltage	300 V RMS
Max.Capacitance Between Conductors @ 1 KHz	28 pf/ft Nom.
DC Resistance per Conductor @ 20deg C	4.2 Ohms/1M' Nom.
Insulation Colors	Black, Red
Jacket Color	Black
RoHS Compliant	--
TIA455-82B Water Infiltration Test Compliant	Yes
UL 444 & 13 Compliant	Yes

Mechanical Properties:

Max. Recommended Pull Tension	54 lbs.
Min. Bend Radius (Install)	2.9"

Specification Issue Date: 7/06

This document is the property of West Penn Wire.
The information contained herein is considered
Proprietary and not to be reproduced by any means
Without written consent of West Penn Wire

Standard Lengths are 1000ft.
The Jacket is sequentially footmarked.
The information presented here is, to the best of our
knowledge, is true and accurate. However, since
conditions of use are beyond our control, all
recommendations or suggestions are presented
without guarantee or responsibility on our part. We
disclaim all liability in connection with the use of
information contained herein or otherwise.

Technical Data Sheet

Aquaseal® Fire-Alarm Cables



WEST PENN WIRE

2833 West Chestnut Street
Washington, PA 15301
Toll Free: (800) 245-4964
Fax: (724) 222-6420
www.westpenn-wpw.com



PART NUMBER:	AQ226
DESCRIPTION:	14/2 Stranded bare copper conductors, overall unshielded with Aquaseal tape and overall jacket.
NEC RATING:	FPL – PLTC, CL3 NEC Article 760 And 725
APPROVALS:	(UL) Listed – Direct Burial
APPLICATION:	Materials suitable for outdoor use, and indoor trays, allows a variety of uses for (Low voltage industrial process control circuits, Power-Limited circuits, Power-Limited fire alarm circuits, Power-Limited tray cable PLTC)

Construction Parameters:

Conductor	14 AWG Bare Copper
Stranding	19x27
Insulation Material	PVC with Nylon
Insulation Thickness	PVC 0.015" Nom. Nylon .005" Nom.
Number of Conductors	2 (1 Pair)
Shield	None
Drain	None
Water-Blocking Tape	2 Ply water swellable tape
Jacket Material	Sunlight/ Moisture Resistant PVC
Jacket Thickness	0.040" Nom.
Overall Cable Diameter	0.310" Nom.
Approximate Cable Weight	59 Lbs/1M' Nom.
Flame Rating	UL 1685 Vertical Tray

Electrical & Environmental Properties:

Temperature Rating	-20deg C to 90deg C
Operating Voltage	300 V RMS
Max.Capacitance Between Conductors @ 1 KHz	32 pf/ft Nom.
DC Resistance per Conductor @ 20deg C	2.7 Ohms/1M' Nom.
Insulation Colors	Black, Red
Jacket Color	Black
RoHS Compliant	Yes
TIA455-82B Water Infiltration Test Compliant	Yes
UL 444 & 13 Compliant	Yes

Mechanical Properties:

Max. Recommended Pull Tension	84 lbs.
Min. Bend Radius (Install)	2.7"

Specification Issue Date: 7/06

This document is the property of West Penn Wire.
The information contained herein is considered
Proprietary and not to be reproduced by any means
Without written consent of West Penn Wire

Standard Lengths are 1000ft.
The Jacket is sequentially footmarked.
The information presented here is, to the best of our
knowledge, is true and accurate. However, since
conditions of use are beyond our control, all
recommendations or suggestions are presented
without guarantee or responsibility on our part. We
disclaim all liability in connection with the use of
information contained herein or otherwise.

BAT Series Batteries

Sealed Lead-Acid


Power Supplies

General

BAT Series Batteries are Power Sonic brand batteries. BAT Series (or Power Sonic brand) batteries are recommended for secondary power or backup power for all NOTIFIER fire alarm control equipment.

Features

- Provide secondary power for control panels.
- Sealed and maintenance-free.
- Overcharge protected.
- Easy handling with leakproof construction.
- Ruggedly constructed, high-impact case (ABS, polystyrene, or polypropylene, depending on models).
- Long service life.
- Compact design.

Agency Listings and Approvals

The listings and approvals below apply to BAT Series Batteries. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL Recognized Components:** MH20845 (*Power-Sonic*)



6933cov.jpg

Ordering Information

BAT-1250-BP: 10-unit bulk pack of BAT-1250 (12 V 5 AH)

BAT-1270-BP: 5-unit bulk pack of BAT-1270 (12 V 7 AH)

BAT-12120-BP: 4-unit bulk pack of BAT-12120 (12V 12 AH)

BAT-12180-BP: 2-unit bulk pack of BAT-12180 (12 V 18 AH)




BAT-12260-BP: 2-unit bulk pack of BAT-12260 (12 V 26 AH)

BAT-12550: single battery (12 V 55 AH)


BAT-121000: single battery (12 V 100 AH)

Part Number Reference & Specifications

Part Number	Power Sonic Part Number	Battery Description			DIMENSIONS									
		Nominal Voltage V	Nominal Capacity @ 20 hr. rate A.H.		Width		Depth		Height		Height over terminal		Weight	
					in.	mm	in.	mm	in.	mm	in.	mm	lb.	kg.
BAT-1250	PS-1250	12	5	sealed	3.54	90	2.76	70	4.02	102	4.21	107	4.1	1.9
BAT-1270	PS-1270	12	7	sealed	5.95	151	2.56	65	3.7	94	3.86	98	4.8	2.18
BAT-12120	PS-12120	12	12	sealed	5.95	151	3.86	98	3.7	94	3.94	100	7.92	3.59
BAT-12180	PS-12180	12	18	sealed	7.13	181	2.99	76	6.57	167	6.57	167	12.6	5.8
BAT-12260	PS-12260	12	26	sealed	6.56	167	6.97	177	4.92	125	4.92	125	17	7.71
BAT-12550	PS-12250	12	55	sealed	9.04	230	6.54	138	8.2	208	8.98	228	36	16.33
BAT-121000	PS-121000	12	100	sealed	12	305	6.6	168	8.2	208	8.98	228	68	30.84

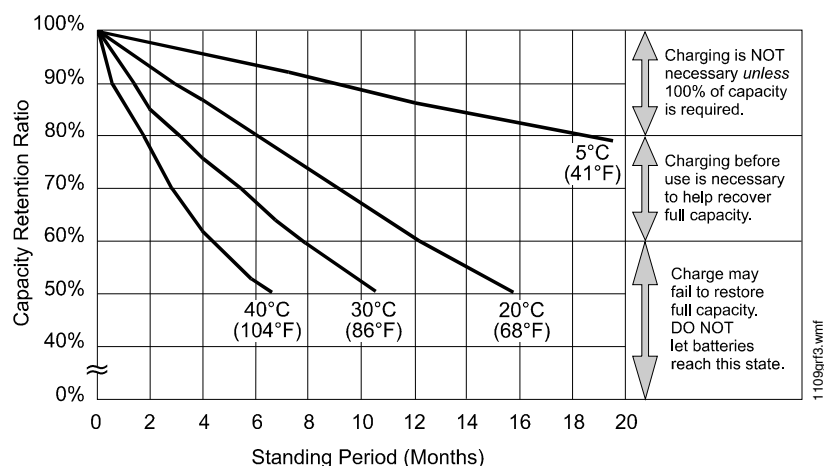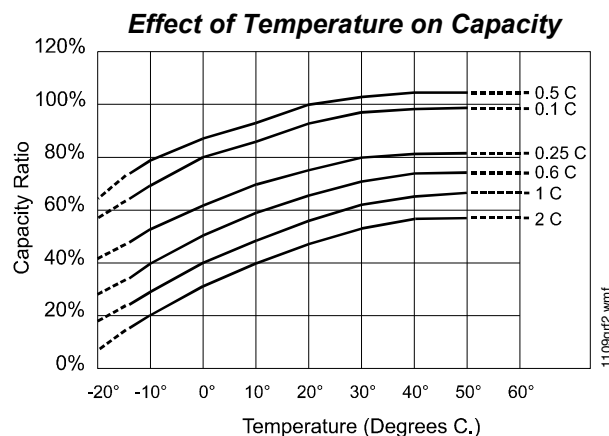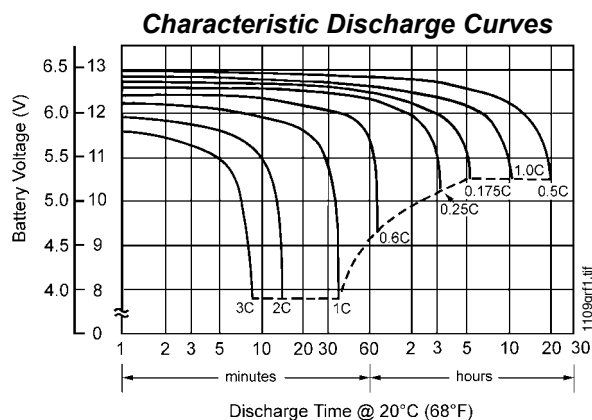

at left:
**PS-121000
Shelf-Life
and Storage**

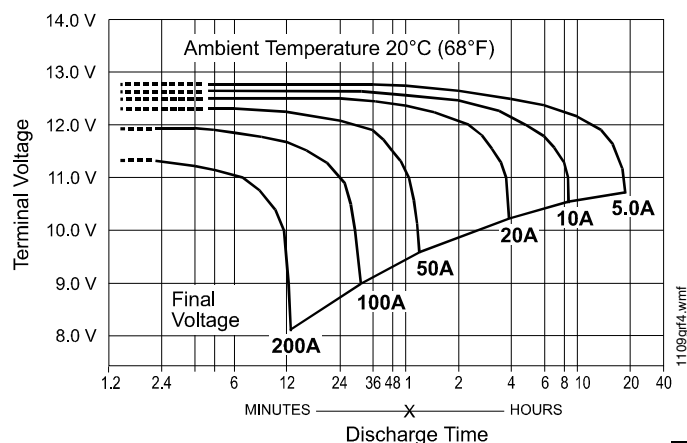

at left:
**PS-121000
Discharge
Characteristics**

NOTIFIER® is a registered trademark of Honeywell International Inc. Batteries display trademarks of the manufacturer. ©2011 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.



Made in the U.S. A.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.
www.notifier.com