

NOTICE TO BIDDERS

Notice is hereby given that sealed bids will be received and publicly read by The Board of Education, East Islip Union Free School District, Town of Islip, Suffolk County, New York on Thursday, November 03, 2022 at 10:00 A.M. for the following bid:

BID# 110322-2 – LED BASEBALL/SOFTBALL SCOREBOARD

Sealed bids should be addressed to the attention of the School Purchasing Agent, East Islip Union Free School District, Business Office, 1 Craig B. Gariepy Avenue, Islip Terrace, New York 11752.

All bids must be submitted to the Office of the School Purchasing Agent on or before the date of opening in a sealed envelope, bearing on the outside the name and address of the bidder and the title of the bid.

Any bids received after the time and date specified will not be considered.

Specifications and bid form may be obtained from the district's website <http://www.eischools.org>, Empire State Purchasing Group's website <https://www.bidnetdirect.com> or at the above office, weekdays, between 9:00 a.m. and 3:00 p.m.

Bid prices shall be irrevocable for a minimum period of forty-five (45) days from the date of the bid opening. The Board of Education reserves the right to reject any and all bids, or to award contracts which, in its judgment, are in the best interest of the school district.

To assure that all bidders are familiar with the Scope of Work, a site walkthrough will be conducted on Monday, October 24, 2022 at 8:30 A.M. All bidders shall assemble at the Buildings and Grounds office of the East Islip School District, 1 Craig B. Gariepy Avenue, Islip Terrace, New York. All bidders are urged to attend.

Dated: October 6, 2022

By Order of Board of Education

East Islip Union Free School District
Town of Islip, New York
County of Suffolk
Islip Terrace, New York 11752

School Purchasing Agent
(631) 224-2031

BUSINESS OFFICE
PURCHASING DEPARTMENT
EAST ISLIP UNION FREE SCHOOL DISTRICT
1 CRAIG B. GARIEPY AVENUE
ISLIP TERRACE, NEW YORK 11752

BID # 110322-2

SPECIFICATIONS AND BID FORM FOR
LED BASEBALL/SOFTBALL SCOREBOARD

IN ACCORDANCE WITH THE PROVISIONS OF SECTION 103 OF THE GENERAL MUNICIPAL LAW AND SECTION 1725 OF THE EDUCATION LAW, AN ADVERTISEMENT FOR A SEALED BID WAS PUBLISHED IN NEWSDAY AND THE ISLIP BULLETIN ON OCTOBER 13, 2022 AND ON THE EMPIRE STATE PURCHASING GROUP WEBSITE. AS STATED IN SUCH NOTICE, BIDS WILL BE PUBLICLY OPENED AND READ IN THE BUSINESS OFFICE OF THE EAST ISLIP SCHOOL DISTRICT LOCATED AT 1 CRAIG B. GARIEPY AVENUE, ISLIP TERRACE, NEW YORK, ON THE 3rd DAY OF NOVEMBER, 2022 AT 10:00 A.M.

NAME OF BIDDER: _____

ADDRESS OF BIDDER: _____

TELEPHONE NUMBER: _____ FAX NUMBER: _____

CONTACT NAME: _____ EMAIL: _____

BUSINESS OFFICE
PURCHASING DEPARTMENT
EAST ISLIP UNION FREE SCHOOL DISTRICT
1 CRAIG B. GARIEPY AVENUE
ISLIP TERRACE, NEW YORK 11752

* * * * *

INSTRUCTIONS TO BIDDERS

1. Read all documents contained in the bid specifications.
2. Bidders are responsible for submitting their bids to the address as follows: East Islip School District, School Purchasing Agent, 1 Craig B. Gariepy Ave., Islip Terrace, New York, 11752, prior to the time indicated in the "Notice to Bidders." Responses received after this date and time will be returned to the bidder unopened. NOTE: This includes any changes listed on the latest addendum issued by the East Islip School District Purchasing Department, if any. **Delay in any and all mail delivery, i.e. Fed Ex, UPS, USPS, in not an exception to the deadline for receipt of bids.**
3. Bidders are responsible for reporting, in writing, any errors found in the bid specifications to the East Islip School District School Purchasing Agent, 1 Craig B. Gariepy Ave., Islip Terrace, New York, 11752.
4. Questions about or clarifications to the technical specifications must be made in writing to the School Purchasing Agent by October 27, 2022 at 10:00 A.M. Verbal questions will not be entertained.
5. Bidders shall indicate on the outside of their sealed bid the following information:
 1. **Title of Bid and Bid Number**
 2. **Date and Time of Bid Opening**
 3. **Company Name****Bidders submitting "alternate" pricing, products or services, must do so as a separate bid package to be considered for award. Each bid must be submitted under separate cover and will be considered on its own merits.**
6. Necessary forms to be submitted are as follows:
 1. **Bid Cost Report, filled out completely.**
 2. **General Bidding Certification; signed and notarized.**
 3. **Non-Collusive Bidding Certification; signed and dated.**
 4. **Form of Disclosure, filled out completely.**
 5. **References as indicated in the bid specification.**
 6. **Insurance certificates as indicated in the General Information section.**
 7. **Copy of literature for all items offered.**
 8. **Bid Bond, Performance Bond, when applicable. (see Scope)**
 9. **Indemnification form completed, signed and notarized.**
 10. **Copy of restricted licenses, certifications, when applicable.**
 11. **Non-Bidders Response, when applicable.**
 12. **Any other information as noted in the bid document.**
7. All bidders shall be supplied with the bid results once the bid has been approved or rejected by the Board of Education.
8. No charge will be allowed for packages, cases, boxes, carboys, bottles, etc. or for freight expenses, expressage or cartage, if applicable. No empty packages, cases, boxes, carboys,

bottles, etc., will be returned to the bidder or contractor, and none will be paid for by the Board of Education.

9. No charge will be allowed for federal, state, or municipal sales and excise taxes, from which the Board of Education is exempt. The price bid shall be net and shall not include the amount of any such tax. Exemption certificates, if required, will be furnished on forms provided by the bidder.
10. Each bidder must state that no member of the Board of Education, East Islip School District, Town of Islip, New York, nor officer or employee thereof, is directly or indirectly interested in the proposal.
11. The Board of Education reserves the right to accept or reject any/and all bids. The Board of Education may re-advertise in the manner provided by Section 103 of the General Municipal Law, to waive any informality or to accept the bid, which, in its judgment, will be in the best public interest.
12. Delivery of materials will be required to be made to the receiving platform, as specified on the purchase order, to any school building within the East Islip School District. The item(s) must be placed at a point within the building, as directed, as the place of delivery. The contractor will be required to furnish proof of delivery in every instance. Bulk materials are to be placed on skids or pallets on the receiving platform as directed by the receiving clerk.
13. The successful bidder(s) must supply information on any items which contain any substance that is listed in the latest printed edition of the National Institute for Occupational Safety and Health Administration of Toxic Effects of Chemical Substance or which has yielded positive evidence of acute or chronic hazards in human, animal, or other biological testing. Such information shall include:
 - A. The name or names of the toxic substance including the generic or chemical name;
 - B. The trade name of the chemical and any other commonly used name;
 - C. The level at which exposure to the substance is determined to be hazardous, if known;
 - D. The acute and chronic effects of exposure at hazardous levels;
 - E. The symptoms of such effect;
 - F. The potential for flammability, explosion and reactivity of such toxic substances;
 - G. Appropriate emergency treatment;
 - H. Proper conditions for safe use and exposure to such toxic substances;
 - I. Procedures for clean up of leaks and spills of such toxic substances.
14. Any item containing asbestos will not be considered acceptable.
15. These instructions are to be considered an integral part of all proposals.
16. The prices quoted herein shall include all delivery charges, if applicable.
17. No fuel charges may be imposed under any name.

Failure to submit any of the above data may result in the rejection of the bid as non-responsive. Furthermore, the East Islip School District reserves the right to request any additional information deemed necessary for the proper evaluation of this bid.

GENERAL BID INFORMATION

1.0 AWARD OF CONTRACT

- 1.1 The award of contracts shall be made as soon as practical after the opening of bids.
- 1.2 The Board of Education reserves the right to award or to reject any and all bids in whole or in part; (when in its sole discretion it deems that it will serve the best interests of the School District), to waive technical defects, irregularities, and omissions; and to select in its sole discretion which of two or more identical bidders shall be awarded the contract.
- 1.3 The award of contracts shall be made pending passage of the district budget coinciding with the school year for which the items/services are intended.
- 1.4 The contract, if awarded, will be to the lowest responsive/responsible bidder(s) in part or in whole who meet all the terms of the specifications.
- 1.5 The East Islip School District guarantees no minimum or maximum purchases or contracts as a result of award of this bid. The services described herein are estimated requirements only, and can be modified by the Board of Education in accordance with District needs.

2.0 INDEMNIFICATION AND HOLD HARMLESS

- 2.1 The contractor agrees to conduct its activities pursuant to this Agreement so as not to unnecessarily endanger any person and to indemnify and hold harmless the East Islip Union Free School District, its Board members, agents, officers, and employees against any and all claims, demands and causes of action, including claims for personal injury and/or death, damages (including judgments, settlements and attorneys fees and damages to the District's property), costs and liabilities, at law or inequity, of every kind and nature whatsoever, directly or proximately resulting from or arising out of or caused by the acts of omissions of the contractor, its officers, agents, employees, guests, patrons, students or invitees, whether such actions are authorized by this Agreement or not.
- 2.2 The contractor shall, at the District's demand, defend at its own risk and expense, any and all suits, actions, or legal proceedings which may be brought or instituted against the District, its Board members, agents, officers, or employees on any such claim, demand, or cause of action arising out of or in connection with its performance of this agreement. Prior to any performances under the contract, the contractor shall procure and keep in force adequate levels of insurance coverage during the terms of this Agreement or any renewal thereof, at its own cost and expense.

3.0 GUARANTEE

- 3.1 The Contractor shall guarantee that the material/equipment offered is standard new equipment, latest model of regular stock product and in current production, and includes all parts regularly used with this type of equipment; also that no attachment or part has been substituted or applied contrary to manufacturer's recommendations and standard practice.
- 3.2 Every unit delivered shall be guaranteed against faulty material and workmanship for a period of twelve months unless otherwise specified. If, during this period, such faults develop, the unit(s) or part(s) affected shall be replaced without any cost to the East Islip School District. When the manufacturer's standard guarantee for the complete unit or any component thereby exceeds twelve months the longer guarantee period shall apply.

4.0 FINANCING OF MATERIAL OR EQUIPMENT PURCHASES

- 4.1 When any bid includes the lease and/or purchase of material and/or equipment, the vendor shall submit a price on the Bid Cost Report supplied by the East Islip School District. The price offered shall include all delivery, finance and any other charges that may be associated with said

purchases or lease. The District shall only deal with the vendors actually submitting the Bid and supplying the material, service or equipment described in the attached specifications.

- 4.2 Any financial or other arrangements made between the vendor and any other party as a part of this bid are strictly between those parties and the District shall not be included or be required to participate in them in any way. Furthermore, the District shall only make payments directly to the vendor awarded a contract as a result of that vendor submitting a valid bid, being deemed the successful vendor, awarded a contract and issued a purchase order. The District shall not make partial or prepayments of any kind unless stipulated in the specifications by the District.

5.0 BID FORM RESPONSES

5.1 When filling out the attached bid form be certain that:

1. All blanks are filled in with the requested information.
2. All forms are signed in blue or other non-black ink.
3. All areas requiring a price are to be filled in as follows:
 - Supply a numerical price for all products or services to be provided. (This includes a \$0.00 if there is no additional cost for any item)
 - The words "No Bid" if you are not interested in or unable to perform any particular portion for the bid.
 - All markings other than those indicated above or any blank spaces where prices are indicated shall be deemed as a "No Bid" by the District and shall make the vendor non-responsive for that particular item(s). No exceptions shall be made in this case.
- 4 Bids must be clear and legible. Bids that are incomplete, conditional, or obscure may be rejected by the Board of Education on the basis of not meeting bid specifications.
5. Vendors are to pay particular attention to the way each item is requested to be priced.
Example: Price \$_____/each, or / lot, or / ounce.
Varying from the requested price breakdown may cause that item to be deemed non-responsive.

6.0 SCOPE

The purpose of this bid is to establish pricing for a LED BASEBALL/SOFTBALL SCOREBOARD, as indicated in these specifications, for the East Islip School District.

- 6.1 The bid prices shall be firm for the duration of contract.
- 6.2 The Board of Education reserves the rights to waive any informality in or to reject any or all bids, or to accept the bid or those bids, which in its judgment is or are best for the school district.
- 6.3 This bid is not considered to be a Capital Construction Project. Note: Capital Construction Projects bids must be accompanied by cash, certified check or bid bond from the bidder with a surety or sureties acceptable to the Board of Education in an amount not less than five percent (5%) of the total bid. Checks or bid bonds will be returned to all successful bidder or bidders within five (5) days after the owner and the accepted bidder or bidders shall have executed the contract, or if no contract has been executed, within thirty (30) days after the date of the opening of the bid, upon demand of the bidder or at the time thereafter, so long as he has not been notified of the acceptance of the bid.
- 6.4 The successful bidder may be required to furnish a Performance Bond and Completion Bond, in an amount equal to 100% of the bid price, in form and with a surety or sureties to the Board of Education.

- 6.5 It is intended that these specifications do not hinder competition and bids to supply products that are equal or superior to the standards established in these specifications will be given every consideration. The services described herein can be modified by the Board of Education in accordance with District needs.
- 6.6 Wherever in the attached bid specifications reference is made to a catalogue or manufacturer's number, this reference establishes the design, dimension, minimum standards, and general quality of workmanship and materials. Proposals to furnish other manufacturers must be accompanied by the name of the manufacturer, illustrations, or photographs with full details and complete information as to how the equipment differs from that specified. At the request of the purchaser, a bidder shall submit for inspection actual samples of such equipment within five (5) days after such request. The decision of the Board of Education in regard to the acceptance of such proposals as equal shall be final.
- 6.7 Contractor shall pay his employees the "prevailing rate of wage" as defined in Section 220 of the New York State Labor Law, Schedule of Wage Rates. New York State Department of Labor Prevailing Wage Schedule attached. **PRC# 2022004874**
- 6.8 The contractor shall furnish and deliver furnishings and equipment described in the specifications with all appurtenances, parts and accessories not specifically mentioned in the Articles of Specifications, but which are normally a part of the furnishings or equipment called for or necessary to render it complete and ready for usage. This shall be included within the bid price and the contractor shall conform to the best business practices of his profession.

7.0 JUDGMENTS/LEGAL FINDINGS

- 7.1 By submitting this bid for consideration, the vendor affirms that they currently have no judgments or other legal findings nor have any pending judgments or other legal findings against the company or any of its executives, with any federal, state or local government entities that in any way could impact or have the potential to impact their ability to complete any contract awarded them as a result of the bid.
- 7.2 Failure to disclose any such judgments and/or findings will result in the termination of any contracts and other penalties as deemed legal and appropriate by the East Islip School District.

8.0 SUBSTITUTIONS

- 8.1 A contract, if awarded, will be on the basis of materials and equipment as described in the drawings or specifications. When the schedule indicates a brand name or a specific manufacturer's or dealer's catalogue number, the bidder may furnish an article equal to or better than that named with **prior** approval by the Plant and Facilities Administrator. In every case, **such proposed substitution shall be clearly indicated by the bidder**, stating the name of the manufacturer, or the trade name. The Board of Education reserves the right to determine the equality of substitutions.
- 8.2 Such decisions regarding the equality will be based upon performance tests made in the District or by an Independent Laboratory analysis. All costs associated with the review of any equal item prior to recommendation to award, shall be at the bidders expense. However, the bidder must include with the bid package, documentation establishing equality of construction, operation and utility.
- 8.3 In case the substitution involves a different size, weight, color, etc., this must be stated.
- 8.4 The decision to accept or reject an equal item rests solely with the Board of Education. If a substitute "or equal" item is not accepted by the Board of Education, the bid will be deemed non-

responsive and the District shall reject this bid. The next lowest responsive bid shall then be reviewed for recommendation of award.

9.0 NON-APPROPRIATION CLAUSE

- 9.1 In accordance with New York State General Municipal Laws the East Islip School District will not be liable for any purchases or contracts for goods or services for which funding is not available. As a result, the vendor agrees to hold the District harmless for any contracts let for which funding either does not currently exist or for which funding has been removed prior to the issuance of a purchase order by the District.
- 9.2 Issuance of a purchase order by the District indicates that the District currently has set aside adequate funds to procure the goods and services indicated in the purchase order or contract. Receipt of a resolution by the Board of Education is not in and of itself a binding contract with the East Islip School District.
- 9.3 Should it become necessary for the District to cancel a project or purchase after an order to proceed or purchase order has been issued, the District will only be liable for and the vendor agrees to only assess those financial damages that it can prove to have incurred as a result of the cancellation.

10.0 NON-ASSIGNMENT

- 10.1 The contractor will give its personal attention to the faithful performance of the contracts; it will not assign, transfer, convey, sublet or otherwise dispose of this contract, or its right, title or interest in or to the same or any part hereof, and it will not assign by power of attorney or otherwise any of the monies to become due and payable under this contract, unless by and with the previous consent in writing of the Board of Education endorsed upon or attached to the assignment filed in said offices. The contractor may not engage subcontractors, hire others to perform all or part of his agreement, nor otherwise delegate his obligations to perform under the contract without the written approval of the District.
- 10.2 In accordance with New York State General Municipal Law 109, at no time during the duration of any contract resulting from this bid, shall the successful vendor be allowed to assign any portion of this contract to a third party without express written approval by the Board of Education.

11.0 TOXIC SUBSTANCES

- 11.1 The successful vendor must supply information on any items which contain any substance that is listed in the latest printed edition of the National Institute of Occupational Safety and Health Registry of Toxic Effects of Chemical Substances or which has yielded positive evidence of acute or chronic health hazards in human, animal or other biological testing. Such information shall be sent to the East Islip Union Free School District, and shall be in conformance with New York State Law. Such information shall include;
- a. the name or names of the toxic substance including the generic or chemical name;
 - b. the trade name of the chemical and any other commonly used name;
 - c. the level at which exposure to the substance is determined to be hazardous, if known;
 - d. the acute and chronic effects of exposure at hazardous levels;
 - e. the symptoms of such effect;
 - f. the potential for flammability, explosion and reactivity of such substance;
 - g. appropriate emergency treatment;
 - h. proper conditions for safe use and exposure to such toxic substance;
 - i. procedures for clean-up of leaks and spills of such toxic substance;

12.0 PURCHASE ORDER

- 12.1 An East Islip School District purchase order will be issued for the purchase of materials/services purchased exclusively by the District. At the discretion of the vendor, if contract is extended to any/all municipal and not for profit organizations authorized under the General Municipal Laws of the State of New York, to purchase any goods and/or services awarded as a result of this bid in accordance with the current amendments to NYS GML 100 through 104, purchase orders and payments will be the sole responsibility of the said municipal and not for profit organizations.

IN EVERY INSTANCE THE PURCHASE ORDER WILL BE THE GOVERNING DOCUMENT.

13.0 PAYMENT

- 13.1 Invoices will be forwarded to the Accounts Payable Department at the East Islip School District, 1 Craig B. Garipey Avenue, Islip Terrace, New York 11752 within 45 days of completion of service/delivery. Failure to submit invoices timely may result in delay in reimbursement and/or financial penalties. Certified Payroll must be submitted with all invoices.

14.0 DURATION OF BID

Bid prices shall remain firm for the duration of this contract.

15.0 TERMINATION OF CONTRACT

- 15.1 The District, by 30 days written notice, may terminate this contract, in whole or in part, when it is in the best interest of the District. If this contract is so terminated, the District shall be liable only for payment in accordance with the payment provisions of this contract for services or supplies rendered prior to the effective date of termination.
- 15.2 In the event the successful bidder fails to deliver as ordered, or within the time specified, or fails to abide by any of the provisions of the contract, and does not cure such failure within the ten (10) day period, the District reserves the right to terminate said contract for default, and in order to protect the continuity of the operations, the required services may be procured from the apparent responsible second low bidder or other sources. In the event default action is carried out, the delinquent contractor agrees to reimburse the District promptly for excess costs occasioned by such expenditures from revenue owed to the original contractor or from the Performance Bond.
- 15.3 Instances of lateness and failure to adhere to the schedule shall constitute a breach of contract.
- 15.4 The contractor pursuant to the provisions of Section 220 of the Labor Law, as amended, shall comply with determinations of the State Industrial Commission as to schedules of wages and supplements to be paid to all laborers, workmen and mechanics employed in connection with the work. The hourly wage rates shall not be less than the prevailing union scale at the time such labor is performed. **PRC# 2022004874**
- 15.5 No bid shall be accepted, or contract awarded, to any Contractor whose performance on any previous contract with this or any other School District has been determined to be unsatisfactory. The Board of Education reserves the right to be the sole judge in this decision.
- 15.6 The Board of Education may make any investigation they deem necessary to determine the ability of the Bidder to perform the work, and the Bidder shall furnish to the Board of Education all such information and data for this purpose as the Board may request.

16.0 INSURANCE REQUIREMENTS FOR OUTSIDE CONTRACTORS PERFORMING A SERVICE FOR THE EAST ISLIP UNION FREE SCHOOL DISTRICT

16.1 Notwithstanding any terms, conditions or provisions, in any other writing between the parties, the facility user hereby agrees to effectuate the naming of the District as an Additional Insured on the facility user's insurance policies, except for workers' compensation and N.Y. State Disability insurance.

16.2 The policy naming the District as an Additional Insured shall:

- a. Be an insurance policy from an A.M. Best A- rated or better insurer, licensed to conduct business in New York State. A New York licensed and admitted insurer is strongly preferred.
- b. State that the organization's coverage shall be primary and non-contributory coverage for the District, its Board, employees and volunteers with a waiver of subrogation in favor of the District.
- c. Additional insured status shall be provided by standard or other endorsements that extend coverage to the District for ongoing operations (CG 20 38) or equivalent and completed operations (CG 20 37) or equivalent. The decision to accept an endorsement rests solely with the District. A completed copy of the endorsements must be attached to the Certificate of Insurance.

16.3 The certificate of insurance must describe the services provided by the maintenance, repair or service provider that are covered by the liability policies.

16.4 The maintenance, repair or service provider agrees to indemnify the District for applicable deductibles and self-insured retentions.

16.5 Minimum Required Insurance:

- a. **Commercial General Liability Insurance**
\$1,000,000 per Occurrence/\$2,000,000 Aggregate
\$2,000,000 Products and Completed Operations
\$1,000,000 Personal and Advertising Injury
\$100,000 Fire Damage
\$10,000 Medical Expense
- b. **Automobile Liability (When an organization's vehicle is brought onsite)**
\$1,000,000 combined single limit for owned, hired, borrowed and non-owned motor vehicles.
- c. **Workers' Compensation and NYS Disability Insurance (For Organizations with Employees)**
Statutory Workers' Compensation (C-105.2 or U-26.3); and NYS Disability Insurance (DB-120.1) for all employees. Proof of coverage must be on the approved specific form, as required by the New York State Workers' Compensation Board. ACORD certificates are not acceptable. A person seeking an exemption must file a CE-200 Form with the state. The form can be completed and submitted directly to the WC Board online.
- d. **Umbrella/Excess Insurance**
\$3 million each Occurrence and Aggregate. Umbrella/Excess coverage shall be on a follow-form basis over the required Auto Liability and General Liability coverages.

16.6 The maintenance, repair or service provider acknowledges that failure to obtain such insurance on behalf of the District constitutes a material breach of contract and subjects it to liability for damages, indemnification and all other legal remedies available to the District. The organization is to provide the District with a certificate of insurance, evidencing the above requirements have been met.

GENERAL BID CERTIFICATION

The bidder certifies that he/she will furnish, at the prices quoted herein, the materials, equipment and/or services as proposed on this bid and that he/she has carefully examined the instructions to bidders, schedules and specifications. The bidder further certifies that no member of the Board of Education of the East Islip Union Free School District, nor any officer or employee is directly or indirectly interested in this bid or in any portion of the profits thereof. That he/she is of lawful age and no one other than bidder has interest in this bid.

BID PROPOSAL CERTIFICATION

Company Name: _____

Business Address: _____

Telephone Number: _____ Fax Number: _____

Federal or Tax ID #: _____ Date of Bid: _____

ADDENDA: The following is confirmation of all the addenda upon which this bid proposal is based.

Addenda # _____ - Received _____, 2022	_____
	Initialed by Rep.
Addenda # _____ - Received _____, 2022	_____
	Initialed by Rep.
Addenda # _____ - Received _____, 2022	_____
	Initialed by Rep.

Note: By signing and submitting this bid for consideration by the Board of Education the vendor acknowledges that they have read, understand, and agree to all aspects of the specifications as presented without reservation or alteration.

THIS PAGE MUST BE NOTARIZED

STATE OF: _____ County of: _____

Subscribed and Sworn to before me this _____ day of _____, 20____
appeared before me _____ to me personally known to be the individual
described in and who executed the foregoing instrument, and he/she duly acknowledged
to me that he/she executed the same.

Print Person, Firm or Corporation

Authorized Signature

Notary Signature

Commission Expiration Date

NON-COLLUSIVE BIDDING CERTIFICATION

By submission of this bid, each bidder and each person signing on behalf of any bidder certifies as to its own organization, under penalty of perjury, that to the best of knowledge and belief:

1. The prices in this bid have been arrived at independently without collusion, consultation, communication or agreement, for the purpose of restricting competition, as to any matter relating to such prices with any other bidder or competitor.
2. Unless otherwise by law, the prices which have been quoted in this bid have not been knowingly disclosed by the bidder and will not knowingly be disclosed by the bidder prior to opening, directly or indirectly, to any other bidder or to any competitor, and
3. No attempt has been made or will be made by the bidder to induce any other person, partnership or corporation to submit or not to submit a bid for the purpose of restricting competition.

(Signed) _____

(Title) _____

RESOLUTION - For corporate bidders only

Resolved that _____ be authorized to sign and submit the bid or proposal of this corporation for the following project LED BASEBALL/SOFTBALL SCOREBOARD and include in such bid or proposal the certification as to non-collusion required by Section 103 of the General Municipal Law as the act and deed of such corporation, and for any inaccuracies or misstatements in such certificate this corporate bidder shall be liable under the penalties of perjury.

(SEAL OF THE CORPORATION)

NAME: _____

TITLE: _____

FORM OF DISCLOSURE

THE UNDERSIGNED AFFIRMS THAT THE FOLLOWING CONSTITUTE ALL OFFICERS, DIRECTORS, PARTNERS, OR CONTROLLING PRINCIPALS OF THE FIRM:

<u>Name</u>	<u>Title</u>
_____	_____
_____	_____
_____	_____
_____	_____

1. Does any East Islip Board Member, administrator, or employee possess any financial interest, directly or indirectly, in the firm? _____ If yes, set forth below the basis upon which a financial interest exists in the firm:

2. Has the firm or any of its officers, directors, partners, or controlling principals possessed any interest in transaction heretofore entered into with East Islip Schools? _____ If yes, please describe the transactions(s):

3. Does any direct relative of a member of the Board, administration, or staff possess any financial interest, directly or indirectly, in the firm (for purposes of their inquiry a direct relative is to be defined as a parent, spouse, child or sibling). _____ If yes, set forth below the East Islip School Board Member, administrator, or staff member whose relation possesses an interest and the relationship:

THE UNDERSIGNED AFFIRMS THAT THE ABOVE STATEMENTS ARE TRUE AND UNDERSTANDS THAT ANY FALSE STATEMENT SHALL CONSTITUTE A VIOLATION OF THE PENAL LAW OR GENERAL MUNICIPAL LAW, AS APPLICABLE.

Firm: _____

Signature: _____

Print Name: _____

Title: _____

Date: _____

REFERENCES

References are to be considered part of the Bid Specifications. A contractor's failure to supply four (4) reliable references with bid proposal could result in the rejection of his bid. References must have purchased materials/services in a manner similar in scope to the specifications of this quote.

1. Firm Name: _____
Contact Name/Title: _____
Email Address: _____
Telephone: _____
Date(s) of Service: _____

2. Firm Name: _____
Contact Name/Title: _____
Email Address: _____
Telephone: _____
Date(s) of Service: _____

3. Firm Name: _____
Contact Name/Title: _____
Email Address: _____
Telephone: _____
Date(s) of Service: _____

4. Firm Name: _____
Contact Name/Title: _____
Email Address: _____
Telephone: _____
Date(s) of Service: _____

INDEMNIFICATION AGREEMENT

The Bidder agrees:

(a) that except for the amount, if any, of damage contributed to, caused by or resulting from the negligence of the District, the Contractor/Licenser agrees to indemnify and hold harmless the East Islip School District, its officers, employees and agents from and against any and all liability, damage, claims, demands, costs, judgments, fees, attorney's fees or loss arising directly or indirectly out of the performance or failure to perform hereunder by the Contractor/Licenser or third parties under the direction or control of the Contractor/Licenser; and

(b) to provide defense for and defend, at its sole expense, any and all claims, demands or causes of action directly or indirectly arising out of the Agreement and to bear all other costs and expenses related thereto.

AUTHORIZED SIGNATURE

DATE

NOTARY PUBLIC

DATE

NON-BIDDER'S RESPONSE

For purposes of maintaining accurate bidder's lists and facilitating your firm's response to our invitation for bid, the East Islip School District is interested in ascertaining reasons for prospective bidders' failure to respond to invitations for bids. If your firm is not responding to this bid, please indicate the reason(s) by checking any appropriate item(s) below and returning this form to the East Islip School District, Purchasing Department, 1 Craig B. Gariepy Ave., Islip Terrace, NY 11752. Failure to either submit a bid proposal or return this form will result in removal of your firm's name from our bidder's lists. Thank you for your cooperation.

We are not responding to this invitation for bid for the following reason(s):

- Items or materials requested not manufactured by us or not available to our company;
- Our items or materials do not meet specifications;
- Specifications not clearly understood or applicable (too vague, too rigid, etc.);
- Quantities too small;
- Insufficient time allowed for preparation of this bid;
- Incorrect address used. Correct mailing address is:

- Our branch/division handles this type of bid. Correct name and mailing address is:

- We are unable to bid at this time but would like to continue to receive invitations for bids.

- We are unable to bid and wish to be removed from the bidder's lists.

NAME OF FIRM: _____

MAILING ADDRESS: _____

CITY/STATE/ZIP CODE: _____

BY: _____

Signature of Representative

DATE: _____

Certification
Pursuant to Section 103-g
of New York State General Municipal Law

IRAN DIVESTMENT ACT

- A. By submission of this bid/proposal or by assuming the responsibility of a Contract awarded hereunder, the Bidder/Contractor (or any assignee) certifies that it is not on the "Entities Determined to Be Non-Responsive Bidders/Offerers Pursuant to the New York State Iran Divestment Act of 2012" list (Prohibited Entities List) posted on the OGS website at <http://www.ogs.ny.gov/about/reas/docs/ListofEntities.pdf> and further certifies that it will not utilize on such Contract, any subcontractor that is identified on the Prohibited Entities List. Additionally, Bidder/Contractor is advised that should it seek to renew or extend a contract awarded in response to the solicitation, it must provide the same certification at the time the Contract is renewed or extended.
- B. During the term of the Contract, should the East Islip School District receive information that a person (as defined in State Finance Law §165-a) is in violation of the above referenced certifications, the East Islip School District will review such information and offer the person an opportunity to respond. If the person fails to demonstrate that it has ceased its engagement in the investment activity which is in violation of the Act within 90 days after the determination of such violation, then the East Islip School District shall take such action as may be appropriate and provided for by law, rule, or contract, including, but not limited to, seeking compliance, recovering damages, or declaring the Contractor in default.
- C. The East Islip School District reserves the right to reject any bid, request for assignment, renewal or extension for an entity that appears on the Prohibited Entities List prior to the award, assignment, renewal or extension of a contract, and to pursue a responsibility review with respect to any entity that is awarded a contract and appears on the Prohibited Entities list after contract award.

Signature

Print Name

Title

Date

SPECIFICATIONS FOR LED BASEBALL/SOFTBALL SCOREBOARD

This contract for services includes the following where applicable:

1. To provide skilled, experienced, service in regard to the installation of the LED Scoreboard System. The company must have, as a minimum, 5 years of continuous experience in the appropriate field. Companies with less than the required experience may not be considered.

State here the number of years of experience: _____.

2. Work shall include installing, troubleshooting, repairing, replacing, new work and general maintenance, including but not limited to warranty repairs.
3. Contractor's service persons shall have tools and equipment necessary to perform required work.
4. When repairing or replacing, the contractor must use the most up-to-date materials being manufactured. No obsolete materials shall be allowed.
5. Parts that have been replaced shall be the property of the East Islip School District and shall be left at the site unless directed otherwise by the Plants & Facilities Administrator.
6. No travel time will be paid. Payments will be made only for time on the job. **All invoices must be accompanied by daily service tickets specifying time of arrival, work done, materials used, time of departure for each employee, a separate materials invoice from supply house and must be signed by an authorized representative of the school district.** A copy of this ticket is to be left with the signer, and this shall be the basis for payment. Service tickets not submitted in a timely fashion will result in payments being held up. Travel time will only be paid when the district considers a repair an emergency and requires contractor to immediately respond to that emergency.
7. No vehicle use will be paid for in the normal course of transporting mechanics and materials to the job site. Contractor may submit a quotation for use of special vehicles. Contractor must obtain prior approval for payment of special vehicle use.
8. Under this contract, sub-contracting shall not be permitted without prior approval of the district. If the permission of the district is granted for the use of a sub-contractor, the incumbent contractor will be allowed to add 10% to the invoice from the sub-contractor for handling and accounting purposes.
9. Contractor shall pay his employees the "prevailing rate of wage" as defined in Section 220 of the New York State Labor Law, Schedule of Wage Rates. The East Islip School District will require proof of payment of the employee's workers reflecting the prevailing rate of wages, through certified payroll. **PRC# 2022004874**
10. Contractor shall be licensed by the County of Suffolk and local municipalities, where required and **submit documentation** upon award.
11. All work must be done in accordance with the National Code, current edition, and all state and local codes.
12. The District reserves the right to assign its personnel to assist the contractor's mechanics if they deem it to be in their best interest.
13. All labor shall be guaranteed for a period of one (1) year from date of acceptance. All parts and materials shall be guaranteed for a minimum of one year or in accordance with manufacturer's

warranty if greater than one year. All on-site warranty service calls provided, if necessary, shall be at no cost to the District during the warranty period. This includes all labor and material costs.

14. Contractor is to have all work done in the best workmanlike manner, and shall clean up and remove all debris and rubbish resulting from his work from time to time, as required or directed. Upon completion of the work, the premises shall be left in a neat, unobstructed condition, the buildings broom clean, and everything in satisfactory repair and order.
15. Equipment, supplies and materials shall be stored at the site only upon the approval of the using agency and at the contractor's risk. In general, such on-site storage should be avoided to prevent possible damage or loss of material.
16. Contractor shall perform work so as to cause the least inconvenience to the district and with proper consideration for the rights of other contractors or workmen. The contractor shall keep in touch with the entire operation and install his equipment promptly.
17. Contractor shall acquaint himself with conditions to be found at the site and shall assume all responsibility for placing and installing the equipment in the locations required.
18. Contractor shall furnish adequate protection from damage for all work and shall repair damages of any kind for which he or his work persons are responsible.
19. Contractor may not impose a fuel charge under any name.
20. The contractor shall furnish four (4) reliable references, which have received service from you similar in manner and scope to the specifications of this bid package. The East Islip School District would prefer to see references from other public school systems that would reflect requirements similar to ours.
21. Contractor must insure that his/her employees abide by the prohibition against smoking in school buildings or on school grounds.
32. Contractor must follow the rules and regulations of the school district. This includes but is not limited to employees displaying photo identification and wearing a name tag.

To assure that all contracts are familiar with Scope of Work a site walkthrough will be conducted on **Monday, October 24, 2022 at 8:30 a.m.** All contractors will assemble in the Buildings & Grounds office located on the second floor of the Early Childhood Center, 1 Craig B. Gariepy Avenue, Islip Terrance, NY 11752. Attendance is **strongly recommended**. The District may not be able to accommodate any request to walk through at any other time.

SCOPE:

The purpose of this bid is to establish pricing for a LED Baseball/Softball Scoreboard to be installed at East Islip Middle School.

Installation will be bid as a base bid including the sign itself, plus two alternates. The contract will be awarded to the lowest, responsible bidder using the base bid and/or alternate(s) that is in the best interest of the District.

All proposed scoreboards must be as specified or equal. The School District is seeking bids for the following:

Daktronics Model BA-618 (or equal)

(Refer to Attachments A-E of this document for full product specifications)

GENERAL INFORMATION:

- Outdoor LED baseball/softball scoreboard displays HOME and GUEST scores to 99, INNING to 19, and indicates BALL to three, STRIKE to two, OUT to two, and H (hit) or E (error).

DIMENSIONS:

- 14'0" wide x 5'0" high x 8" deep

POWER:

- 170 Watts, 1.5 Amps

DIGITS & INDICATORS:

- All digits are 18" high.
- Indicators are 2" in diameter.
- Robust weather-sealed digits with an 1/8-inch layer of weather-tight silicone gel surrounding the internal digit electronics and each LED.
- Digits may be dimmed for night viewing

CAPTIONS:

- HOME and GUEST captions are 12" high. INNING caption is 10" high. All other captions are 8" high.
- Standard vinyl captions, applied to the display face.

CUSTOMIZATION:

- Cabinet Background Color – Perfect Match Red
- Striping Color – White
- Caption Color – White
- Digit Color – White LED

CONSTRUCTION:

- Alcoa aluminum alloy 5052 for excellent corrosion resistance.
- Digit panels and electronics are serviced from the front of the scoreboard.

OPERATING TEMPERATURES:

- Display: -22° to 122° Fahrenheit


- Console: 32° to 130° Fahrenheit

CONTROL:

- Daktronics All Sport 5000 Wireless Outdoor
- 2.4 GHz spread spectrum radio control
- Durable carrying case

IDENTIFICATION PANEL:

- 2'-0" H x 14'0" W
- Non-backlit
- To read: "HOME OF E.I. PRIDE" as shown below
- Red background with white vinyl letters

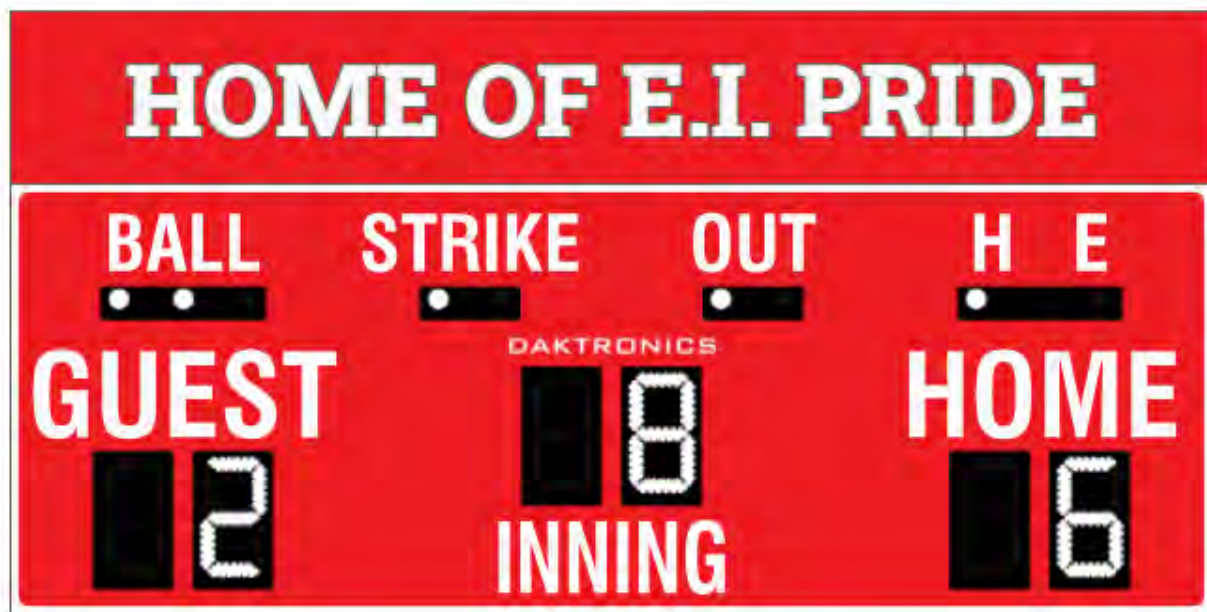

If any of the equipment being proposed varies from the specifications, such variation(s) must be listed in writing and attached as part of the bid proposal.

Successful Bidder must have at least five years of experience in providing and installing quality scoreboards and must be in the regular business of providing athletic scoreboards.

This contract will be awarded to the lowest responsible, responsive bidder. This contract includes equipment and "turn-key" installation, delivery, handling, and complete clean-up.

INSTALLATION (Base Bid): Install in same location using existing supports

Scoreboard must be installed per the manufacturer's recommendations and in accordance with the National Code, and all state and local codes. Installation must be performed by qualified personnel. (Refer to Attachments B and C of this document for installation manual and specifications.)

Scoreboard will be installed in same location as existing scoreboard, using existing supports and footings. The Successful Bidder will be responsible for removal and disposal of the existing scoreboard.

The District has soil boring reports available upon request, if necessary.

The installation location has an existing electrical service. The Successful Bidder must verify that this service meets the power requirements to support the new scoreboard. If upgrades or changes are needed, the Successful Bidder will have a certified electrician perform these changes. All final electrical connections to the scoreboard will be included with the installation.

The Successful Bidder will supply all necessary materials for installation, including but not limited to support columns, concrete, nuts, bolts, machine/lift rentals, etc.

Final installation must be able to withstand a minimum of 135 mph winds.

Ground clearance under scoreboard will be approximately 12 feet high.

Upon award, successful bidder may be required to submit an installation drawing, signed and sealed by a NYS licensed professional engineer.

All equipment is to be fully tested and demonstrated to district personnel. Training of District staff will be required after installation is complete.

Alternate #1: Install in same location using new supports

Scoreboard must be installed per the manufacturer's recommendations and in accordance with the National Code, and all state and local codes. Installation must be performed by qualified personnel.

Scoreboard will be installed in same location as existing scoreboard, using new supports and footings. The Successful Bidder will be responsible for removal and disposal of the existing scoreboard, supports, and footings. Successful Bidder will fill any holes, clean up any debris, and reseed the area as necessary.

New footers and supports will be installed per the manufacturer's recommendations.

The District has soil boring reports available upon request, if necessary.

The installation location has an existing electrical service. The Successful Bidder must verify that this service meets the power requirements to support the new scoreboard. If upgrades or changes are needed, the Successful Bidder will have a certified electrician perform these changes. All final electrical connections to the scoreboard will be included with the installation.

The Successful Bidder will supply all necessary materials for installation, including but not limited to support columns, concrete, nuts, bolts, machine/lift rentals, etc.

Final installation must be able to withstand a minimum of 135 mph winds.

Ground clearance under scoreboard will be approximately 12 feet high.

Upon award, successful bidder will be required to submit an installation drawing, signed and sealed by a NYS licensed professional engineer.

All equipment is to be fully tested and demonstrated to district personnel. Training of District staff will be required after installation is complete.

Alternate #2: Install in new location

Scoreboard must be installed per the manufacturer's recommendations and in accordance with the National Code, and all state and local codes. Installation must be performed by qualified personnel.

Scoreboard will be installed in the outfield, behind the fence near first base. The Successful Bidder will be responsible for removal and disposal of the existing scoreboard, supports, and footers. Successful Bidder will fill any holes, clean up any debris, and reseed the area as necessary.

New footers and supports will be installed per the manufacturer's recommendations.

The District has soil boring reports available upon request, if necessary.

The installation location does not have an existing electrical service. The Successful Bidder must provide electrical service to the location in accordance with the power requirements per the manufacturer's recommendations. The Successful Bidder will have a certified electrician perform this service. Power may be available from the old field house building approximately 50 feet from location. Successful Bidder will disconnect power from old scoreboard. All final electrical connections to the scoreboard will be included with the installation.

The Successful Bidder will supply all necessary materials for installation, including but not limited to support columns, concrete, nuts, bolts, machine/lift rentals, etc.

Final installation must be able to withstand a minimum of 135 mph winds.

Ground clearance under scoreboard will be approximately 12 feet high.

Upon award, successful bidder will be required to submit an installation drawing, signed and sealed by a NYS licensed professional engineer.

All equipment is to be fully tested and demonstrated to district personnel. Training of District staff will be required after installation is complete.

Bid Cost Report

BID# 110322-2 LED BASEBALL/SOFTBALL SCOREBOARD

Scoreboard with Installation Base Bid:

Total cost for scoreboard with installation in same location using existing supports as described in specifications.

\$ _____

Same as or equivalent to: Daktronics BA-618

If alternate item, write Manufacturer Name & Model number here: _____

Include equipment flyer, specifications, tech guide, installation guide, and any other relevant literature.

The decision to accept or reject an equal item rests solely with the Board of Education.

Alternate #1:

Cost additional to the base bid for installation in same location using new supports as described in specifications.

\$ _____

Subtotal (Base bid + Alternate #1) = \$ _____

Same as or equivalent to: Daktronics BA-618

If alternate item, write Manufacturer Name & Model number here: _____

Include equipment flyer, specifications, tech guide, installation guide, and any other relevant literature.

The decision to accept or reject an equal item rests solely with the Board of Education.

Alternate #2:

Cost additional to the base bid for installation in new location as described in specifications.

\$ _____

Subtotal (Base bid + Alternate #2) = \$ _____

Same as or equivalent to: Daktronics BA-618

If alternate item, write Manufacturer Name & Model number here: _____

Include equipment flyer, specifications, tech guide, installation guide, and any other relevant literature.

The decision to accept or reject an equal item rests solely with the Board of Education.

Attachment A

Daktronics BA-618 Product Specifications (OR EQUAL)

DAKTRONICS BA-618 PRODUCT SPECIFICATIONS



This outdoor LED baseball/softball scoreboard displays HOME and GUEST scores to 99, INNING to 19 and indicates BALL to three, STRIKE to two, OUT to two and H (hit) or E (error). Scoreboard shown with optional striping and amber PanaView® digits.

DIMENSIONS	UNCRATED WEIGHT	POWER (120 VAC)*	
5'-0" H x 14'-0" W x 8" D (1.52 m, 4.27 m, 203 mm)	200 lb (91 kg)	Red/Amber Digits	80 Watts, 0.7 Amp
		White Digits	170 Watts, 1.5 Amps

*Scoreboard requires a dedicated circuit. Models with 240 VAC power at half the indicated amperage are also offered (International Use Only).

DIGITS & INDICATORS

- All digits are 18" (457 mm) high. Indicators are 2" (51 mm) in diameter.
- Select red, amber, or white LED digits and indicators.
- Scoreboard features robust weather-sealed digits (see [DD2495646](#)).
- Digits may be dimmed for night viewing.

CAPTIONS

- HOME and GUEST captions are 12" (305 mm) high. INNING caption is 10" (254 mm) high. All other captions are 8" (203 mm) high.
- Standard captions are vinyl, applied to the display face.

DISPLAY COLOR

Choose from 150+ colors (from Martin Senour® paint book) at no additional cost.

CONSTRUCTION

Alcoa aluminum alloy 5052 for excellent corrosion resistance

PRODUCT SAFETY APPROVAL

ETL-listed to UL 48, tested to CSA standards, and CE-labeled

OPERATING TEMPERATURES

- Display: -22° to 122° Fahrenheit (-30° to 50° Celsius)
- Console: 32° to 130° Fahrenheit (0° to 54° Celsius)

WWW.DAKTRONICS.COM E-MAIL: SALES@DAKTRONICS.COM

201 Daktronics Drive, PO Box 5128, Brookings, SD 57006
Phone: 1-800-325-8766 or 605-692-0200 Fax: 605-697-4746
DD2118104 091420 Page 1 of 7



DAKTRONICS BA-618 PRODUCT SPECIFICATIONS

CONTROL CONSOLES	CONTROL OPTIONS
<p>All Sport® 1600* (see SL-04352)</p> <p><i>*May be upgraded to</i> All Sport 5000 (see SL-03991)</p>	<p>Wired (standard): One-pair shielded cable of 22 AWG minimum is required. A cover plate with mounted connector and standard 2" x 4" x 2" (51 mm x 102 mm x 51 mm) outlet box is provided. Connector mates with signal cable from control console.</p> <hr/> <p>Wireless (optional): 2.4 GHz spread spectrum radio features 64 non-interfering channels and 8 broadcast groups (see SL-04370).</p>
<p>RC-200 (see DD3715714)</p>	<p>Optional wireless handheld controller features 2.4 GHz spread spectrum radio with 64 non-interfering channels and 8-10 hours of operation via internal rechargeable battery.</p>
<p>DAK Score & MX-1 (see DD3888368)</p>	<p>CUSTOMER-SUPPLIED mobile device or tablet with DAK Score app installed communicates via Bluetooth® wireless technology to an MX-1 Interface Box that controls the scoreboard through 2.4 GHz radio or wired connection.</p>

MOUNTING

Scoreboard is typically mounted on two vertical beams or poles. Hardware to mount scoreboard on two beams is included; hardware for more beams is at additional cost. Standard mounting uses I-beam clamps. Optional mounting method using angle brackets is also offered; maximum beam width is 12" (305 mm) and maximum beam depth is 22" (559 mm). Refer to attached drawings for more information on mounting methods.

SERVICE ACCESS

Digit panels and electronics are serviced from the front of the scoreboard.

GENERAL INFORMATION

Scoreboard provides scoring capabilities for two teams. 100% solid state electronics are housed in an all aluminum cabinet. Scoreboard is shipped in one section. Scoreboard power is to be provided on a dedicated circuit to prevent loss of game information due to failure of another component on the circuit. Specifications and pricing are subject to change without notice.

OPTIONS & ACCESSORIES

- Scoreboard border striping
- Multiple caption and striping colors (see [DD2101644](#))
- Team name caption in place of HOME
- Team names on changeable panels
- Individual digit protective screens (see [SL-04939](#))
- Protective netting (see [DD2690927](#))
- Optional angle bracket mounting method
- Advertising/identification panels
- Decorative accents
- Electronic message centers and video displays in multiple sizes

ADVERTISING/IDENTIFICATION PANELS

Backlit & Non-Backlit:

- 1'-6" H x 14'-0" W (457 mm, 4.27 m)
- 2'-0" H x 14'-0" W (610 mm, 4.27 m)
- 2'-6" H x 14'-0" W (762 mm, 4.27 m)

For additional non-backlit panel sizes, see [SL-03761](#).

FOR ADDITIONAL INFORMATION

- Installation Specifications: DWG-1157187 (attached)
- Standard I-beam Mounting: DWG-1052565 (attached)
- LVX I-Beam Mounting: DWG-3918361 (attached)
- Optional Pole Mounting: DWG-1048184 (attached)
- Component Locations: DWG-1066028 (attached)
- Architectural Specifications: See [SL-05255](#)

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Daktronics, Inc. is under license.

WWW.DAKTRONICS.COM E-MAIL: SALES@DAKTRONICS.COM

All Sport® and PanaView® are trademarks of Daktronics, Inc.
Martin Senour® is a registered trademark of its owner.
DD2118104 091420 Page 2 of 7 Copyright © 2011-2020 Daktronics, Inc.



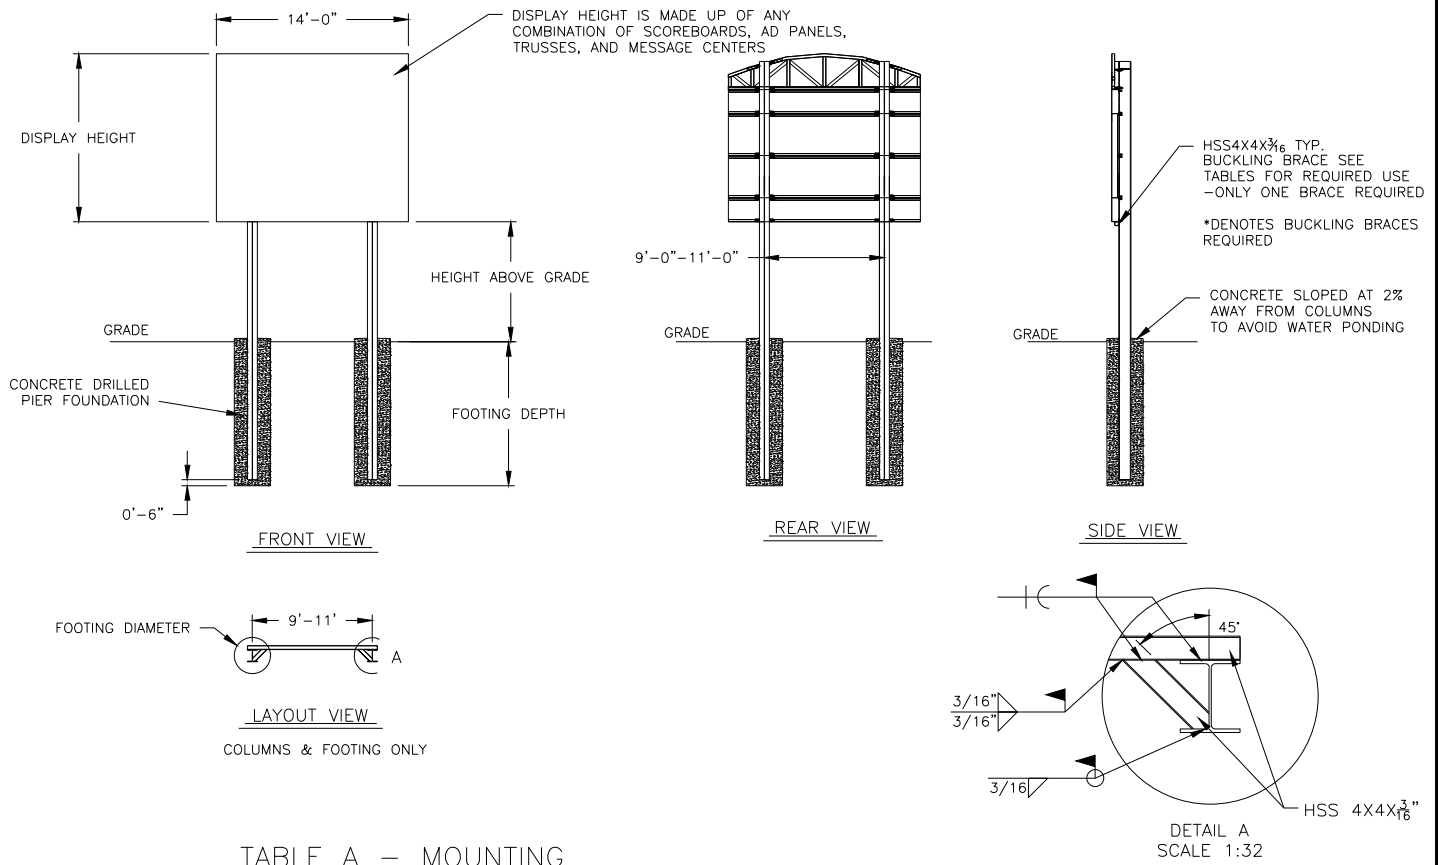


TABLE A - MOUNTING

EXPOSURE B

HEIGHT ABOVE GRADE = 10'					HEIGHT ABOVE GRADE = 15'						
DISPLAY HEIGHT (FT)		DESIGN WIND VELOCITY				DISPLAY HEIGHT (FT)		DESIGN WIND VELOCITY			
		115 MPH	130 MPH	150 MPH	170 MPH			115 MPH	130 MPH	150 MPH	170 MPH
6	COLUMN FOOTING	W6X15 2.0'X6.5'	W8X21 2.0'X7.0'	W8X21 2.0'X8.0'	W10X22 2.0'X8.5'	6	COLUMN FOOTING	W8X24 2.0'X7.5'	W8X24 2.0'X8.0'	W8X28 2.0'X9.0'	W8X31 2.0'X9.5'
8	COLUMN FOOTING	W10X22 2.0'X7.5'	W8X24 2.0'X8.0'	W8X24 2.0'X9.0'	W8X28 2.0'X10.0'	8	COLUMN FOOTING	W8X31 2.0'X8.5'	W8X31 2.0'X9.0'	W10X33 3.0'X8.5'	W10X39 3.0'X9.5'
10	COLUMN FOOTING	W8X24 2.0'X8.5'	W8X28 2.0'X9.0'	W8X31 2.0'X10.0'	W10X33 3.0'X9.5'	10	COLUMN FOOTING	W8X24* 2.0'X9.0'	W12X26* 2.0'X10.0'	W10X33* 3.0'X9.5'	W16X36* 3.0'X11.0'
12	COLUMN FOOTING	W8X28 2.0'X9.0'	W8X31 2.0'X10.0'	W10X39 3.0'X9.5'	W12X40 3.0'X11.0'	12	COLUMN FOOTING	W12X26* 2.0'X10.0'	W14X30* 3.0'X9.5'	W16X36* 3.0'X11.0'	W14X43* 3.0'X12.0'
14	COLUMN FOOTING	W10X26* 2.0'X10.0'	W10X26* 3.0'X9.0'	W12X30* 3.0'X10.0'	W14X34* 3.0'X11.0'	14	COLUMN FOOTING	W10X30* 3.0'X9.5'	W10X49* 3.0'X10.0'	W16X40* 3.0'X11.0'	W14X48* 3.0'X13.0'

FOOTING DIMENSIONS = DIAMETER X DEPTH
* DENOTES BUCKLING BRACE REQUIRED

EXPOSURE C

HEIGHT ABOVE GRADE = 10'				HEIGHT ABOVE GRADE = 15'			
DISPLAY HEIGHT (FT)		DESIGN WIND VELOCITY		DISPLAY HEIGHT (FT)		DESIGN WIND VELOCITY	
		115 MPH	140 MPH			115 MPH	140 MPH
6	COLUMN FOOTING	W8X21 2.0'X7.5'	W8X24 2.0'X8.5'	6	COLUMN FOOTING	W12X26 2.0'X8.5'	W8X31 2.0'X9.5'
8	COLUMN FOOTING	W8X24 2.0'X8.5'	W8X28 2.0'X10.0'	8	COLUMN FOOTING	W8X31 2.0'X9.5'	W10X39 3.0'X9.5'
10	COLUMN FOOTING	W8X31 2.0'X9.5'	W10X33 3.0'X9.5'	10	COLUMN FOOTING	W12X30* 3.0'X9.0'	W16X36* 3.0'X11.0'
12	COLUMN FOOTING	W10X33 3.0'X9.0'	W12X40 3.0'X10.5'	12	COLUMN FOOTING	W14X34* 3.0'X9.5'	W16X40* 3.0'X11.0'
14	COLUMN FOOTING	W12X26* 3.0'X9.5'	W14X34* 3.0'X11.0'	14	COLUMN FOOTING	W14X38* 3.0'X11.0'	W14X48* 3.0'X13.0'

FOOTING DIMENSIONS = DIAMETER X DEPTH
* DENOTES BUCKLING BRACE REQUIRED

NOTE:
-REFER TO NOTE 7 FOR EXPOSURE CATEGORY DEFINITIONS.

NOTES:

- FOOTING AND COLUMN SIZES ARE SUGGESTIONS ONLY, PROVIDED TO ASSIST WITH ESTIMATING INSTALLATION COSTS AND ARE NOT INTENDED FOR CONSTRUCTION PURPOSES. THE DESIGN MUST BE CERTIFIED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF THE INSTALLATION BEFORE THEY CAN BE USED FOR FABRICATION OR ERECTION.
- INTERNATIONAL BUILDING CODE 2012 USED IN DESIGN OF COLUMNS AND FOOTINGS WITH IMPORTANCE FACTOR=1, Kzt=1.0, Kd=0.85, G=0.85. SEISMIC DESIGN WAS NOT CONSIDERED.
- FOOTING DIMENSIONS ARE BASED ON ASSUMED SOIL CLASS 4 (ALLOWABLE LATERAL BEARING PRESSURE OF 150 psf).
- STRUCTURAL STEEL IS GRADE A992 (50 ksi) STEEL. CONCRETE SHALL HAVE A MINIMUM 28 DAY COMPRESSIVE STRENGTH OF 2500 psi.
- THE AVERAGE DISPLAY WEIGHT FOR A LAYOUT CAN NOT EXCEED 8 PSF.
- DAKTRONICS INC. IS NOT RESPONSIBLE FOR STRUCTURES DESIGNED AND INSTALLED BY OTHERS.
- LOCAL BUILDING OFFICIALS SHOULD BE CONTACTED TO DETERMINE THE WIND SPEED AND EXPOSURE CATEGORY FOR THE PROPOSED SIGN LOCATION. THE EXPOSURE CATEGORY C IS DEFINED AS:


EXPOSURE B - URBAN AND SUBURBAN AREAS, OR OTHER TERRAIN WITH NUMEROUS SPACED OBSTRUCTIONS HAVING THE SIZE OF SINGLE-FAMILY DWELLINGS OR LARGER. THESE CONDITIONS MUST PREVAIL FOR A DISTANCE FROM THE SIGN OF AT LEAST 2,600 FT OR 20 TIMES THE SIGN HEIGHT, WHICHEVER IS GREATER

EXPOSURE C - OPEN TERRAIN WITH SCATTERED OBSTRUCTIONS HAVING HEIGHTS GENERALLY LESS THAN 30 FT. THIS CATEGORY INCLUDES FLAT OPEN COUNTRY, GRASSLANDS, AND ALL WATER SURFACES IN HURRICANE PRONE REGIONS.
- FOR SPECIFIC PRODUCT DETAILS ON WEIGHT, MOUNTING, ETC. REFER TO THE INDIVIDUAL PRODUCT SPECIFICATION SHEETS.


	DAKTRONICS, INC. BROOKINGS, SD 57006		THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2013 DAKTRONICS, INC.	
	DO NOT SCALE DRAWING			
PROJ: OUTDOOR SCOREBOARD INSTALLATION				
TITLE: 14' WIDTH SCOREBOARD INSTALLATION SPECS				
DESIGN: RSCHWAR		DRAWN: RSCHWAR		DATE: 27 NOV 13
SCALE: 1/16" = 1'				
SHEET	REV	JOB NO:	FUNC-TYPE-SIZE	1157187
02	02	P1647	E-10-A	

REV	DATE:	UPDATED WIDE FLANGE AND FOUNDATION VALUES	BY:	
02	27 OCT 15		AMP	
REV	DATE:	UPDATED CLAMPS IN REAR AND SIDE VIEW AND ADDED 170 MPH WIND SPEC COLUMN	BY:	
01	23 JUL 14		TJT	

VERTICAL BEAM - FLANGE THICKNESS MUST BE 1/4" - 3/4"
 1/2-13 X 3.000 BOLT - BOLT THREAD MUST ENGAGE ENTIRE DEPTH OF SPRING NUT. BOLT MUST BE TIGHTENED TO 40FT-LB TORQUE
 1/2" LOCK WASHER
 1/2" FLAT WASHER
 I-BEAM CLAMP - ASSURE CLAMP IS TIGHTLY ENGAGED TO I-BEAM AND NUT

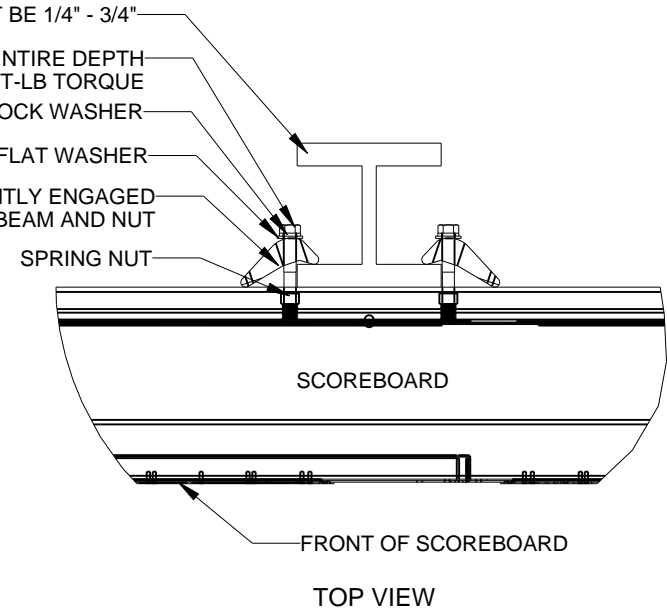

*****CRITICAL*****
DO NOT USE ANY LUBRICANT ON ANY MOUNTING HARDWARE OR WARRANTY WILL BE VOIDED

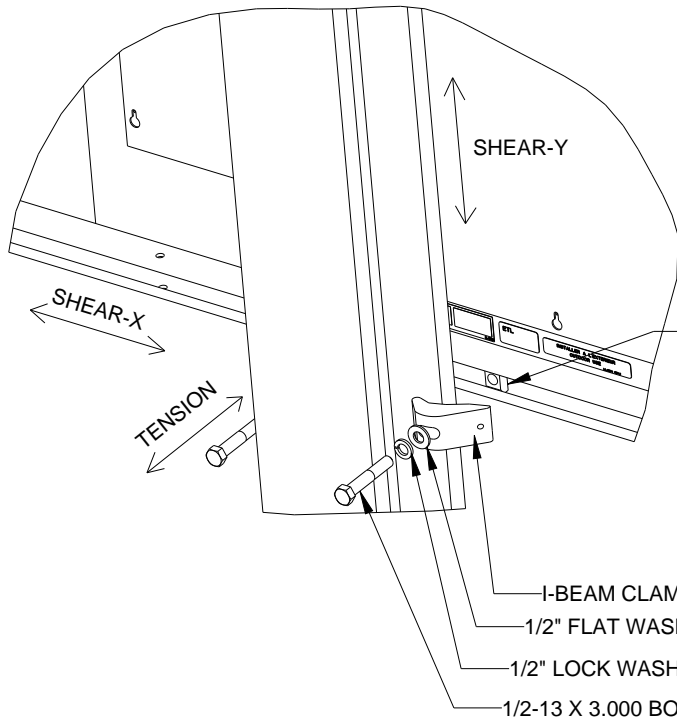

SPRING NUT
*****CRITICAL*****
 MAKE SURE SPRING NUT IS TURNED TO VERTICAL POSITION INSIDE SCOREBOARD CHANNEL

EXPLODED REAR ISOMETRIC VIEW

STANDARD MOUNTING METHOD

MOUNTING INSTRUCTIONS:

1. PLACE SPRING NUTS INTO SCOREBOARD CHANNEL IN APPROXIMATE LOCATION OF VERTICAL BEAMS
2. LIFT SCOREBOARD INTO POSITION
3. MAKE SURE THE 1/2-13 BOLTS ARE AS CLOSE TO THE I-BEAM FLANGES AS POSSIBLE
4. WHEN SCOREBOARD IS ADJUSTED TO FINAL DESIRED POSITION, TIGHTEN BOLTS FIRMLY
5. IF FLANGE THICKNESS IS MORE THAN 3/4" THICK LONGER BOLTS WILL BE REQUIRED AT THE CUSTOMER'S EXPENSE.

STRUCTURAL NOTES


ALLOWABLE CAPACITY PER EACH CLAMP:
 SHEAR = 160 LBS
 TENSION = 2300 LBS

SHEAR AND TENSION LOAD DIRECTION ARE AS INDICATED ON REAR ISOMETRIC VIEW

05	22 DEC 15	PER EC-22871; ADDED LUBRICANT NOTE	PJS 18704
04	06 JAN 14	ADDED ALLOWABLE TENSION AND SHEAR CAPACITY DETAILS	JAVA
03	23 OCT 13	PER EC-12382; CHANGED BOLT TORQUE FROM 30 FT-LB TO 40 FT-LB	NJM
02	07 MAR 12	ADDED STANDARD MOUNTING METHODS NOTES	KDD
01	21 FEB 12	CHANGED ROCKER TO I-BEAM	KDD
REV	DATE:		BY:

DAKTRONICS THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2016 DAKTRONICS, INC. (USA)


PROJECT: OUTDOOR SCOREBOARD			
TITLE: P1647; I-BEAM CLAMP MOUNTING			
DATE: 22-DEC-15	DIM UNITS: INCHES [MILLIMETERS]	SHEET	REV
SCALE: 1/8	DO NOT SCALE DRAWING		1 OF 1 05
DESIGN: MCARSRU	JOB NO.	FUNC - TYPE - SIZE	1052565
DRAWN: MCARSRU	P1647	E - 07 - A	

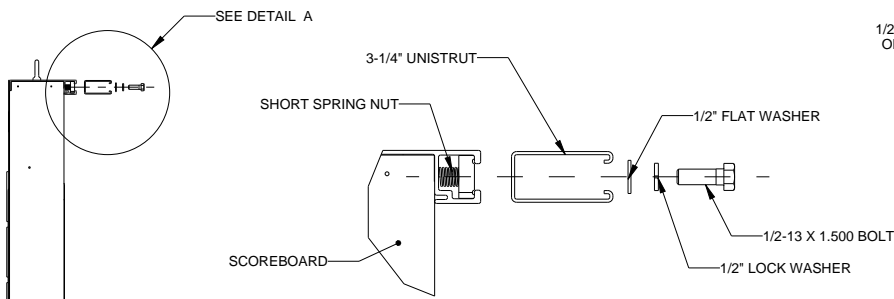

**DETAIL A
SCALE 1/4**


RECOMMENDED METHOD OF INSTALLATION:
 - INSTALL 1 1/2" BOLT, 1/2" LOCK WASHER, 1/2" FLAT WASHER
 USING SHALLOW SOCKET WITH EXTENSION.
 - ENTER FROM SIDE OF UNISTRUT SECURING INSIDE BOLTS
 FIRST AND MOVING OUTWARD.

**EXPLODED SIDE VIEW
UNISTRUT ATTACHMENT
SCALE 1/15**

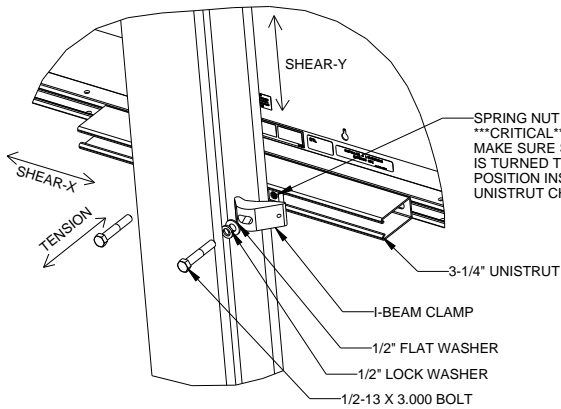


EXPLODED REAR ROTATED VIEW

SCALE 1/8

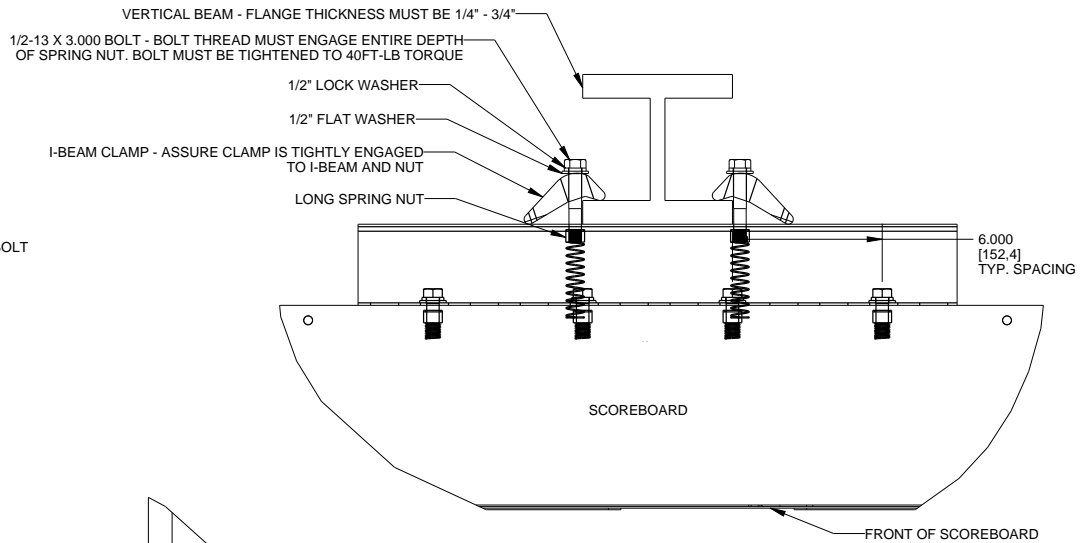

TOP VIEW

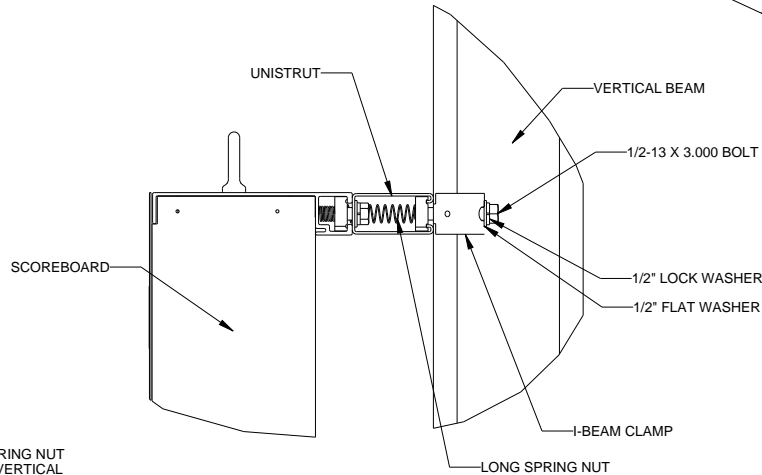

**SIDE VIEW
SCOREBOARD ATTACHMENT**

STRUCTURAL NOTES

ALLOWABLE CAPACITY PER
 COLUMN CONNECTION:
 SHEAR = 185 LBS
 TENSION = 2400 LBS

SHEAR AND TENSION LOAD
 DIRECTION ARE AS INDICATED ON
 REAR ISOMETRIC VIEW




STANDARD MOUNTING METHOD

MOUNTING INSTRUCTIONS:

1. PLACE SPRING NUTS INTO SCOREBOARD CHANNEL IN LOCATIONS SHOWN IN TOP VIEW
2. PLACE SPRING NUTS IN UNISTRUT IN APPROXIMATE LOCATION OF VERTICAL BEAMS
3. LIFT SCOREBOARD INTO POSITION
4. MAKE SURE THE 1/2-13 BOLTS ARE AS CLOSE TO THE I-BEAM FLANGES AS POSSIBLE
5. WHEN SCOREBOARD IS ADJUSTED TO FINAL DESIRED POSITION, TIGHTEN BOLTS FIRMLY
6. IF FLANGE THICKNESS IS MORE THAN 3/4" THICK LONGER BOLTS WILL BE REQUIRED AT THE CUSTOMER'S EXPENSE.

*****CRITICAL***
 DO NOT USE ANY LUBRICANT
 ON ANY MOUNTING HARDWARE
 OR WARRANTY WILL BE VOIDED**

REV	DATE:	BY:	
			<small>THIRD ANGLE PROJECTION</small>
<small>THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2018 DAKTRONICS, INC. (USA)</small>			
PROJECT: OUTDOOR SCOREBOARD			
TITLE: P1647: LVX I-BEAM CLAMP MOUNTING			
DATE:	18-MAY-18	DIM UNITS: INCHES (MILLIMETERS)	SHEET 1 OF 1
SCALE:	1/5	DO NOT SCALE DRAWING	REV 00
DESIGN:	KDRAGT	JOB NO. P1647	FUNC - TYPE - SIZE E - 07 - B
DRAWN:	KDRAGT		3918361

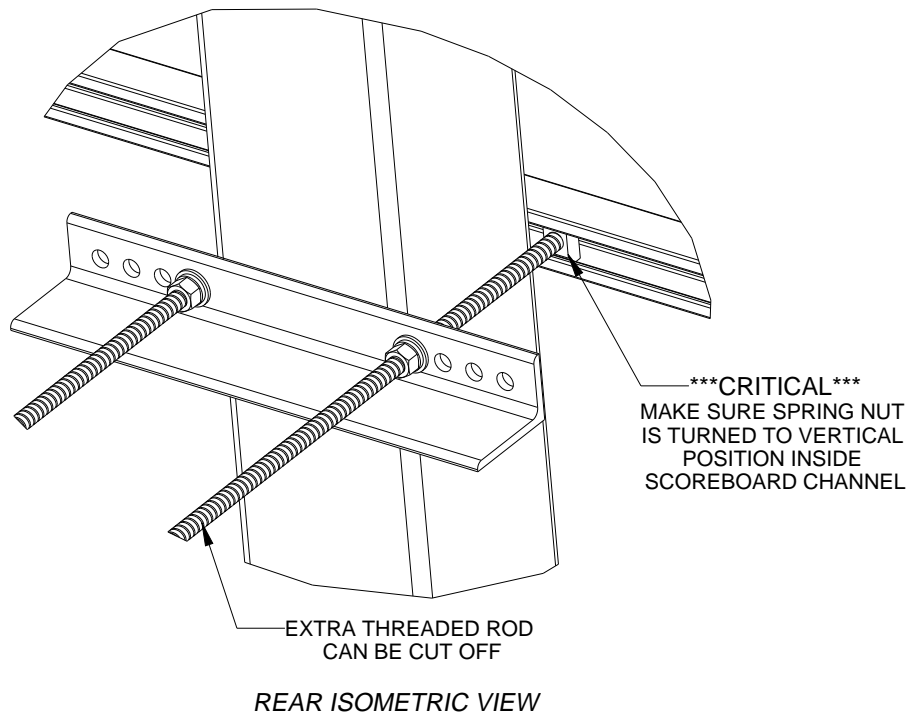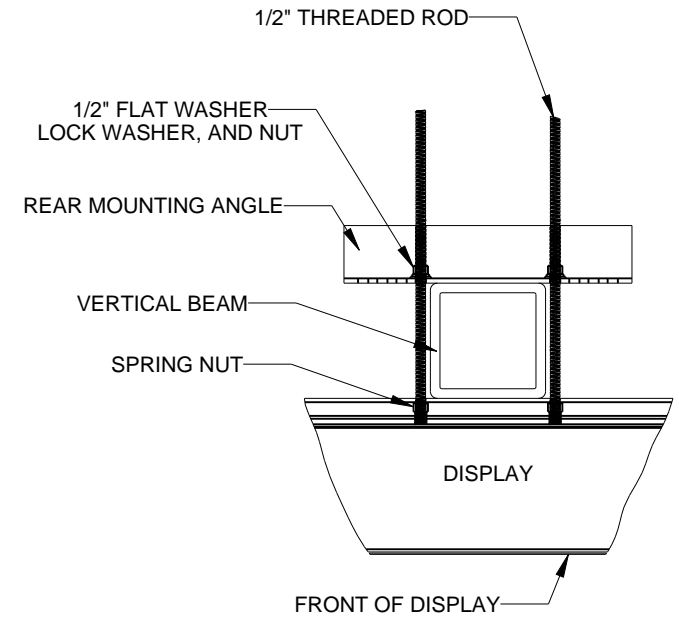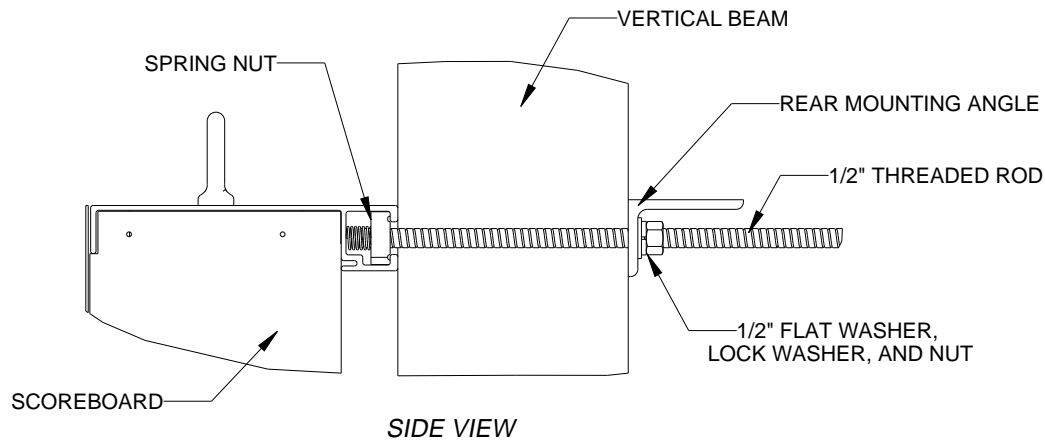

TOP VIEW
SCALE 1/10

*****CRITICAL*****
DO NOT USE ANY LUBRICANT
ON ANY MOUNTING HARDWARE
OR WARRANTY WILL BE VOIDED


STRUCTURAL NOTES:
- BOLT TORQUE: 30 FT-LB

NOTES:
- THREADED RODS RUN ALONG BOTH SIDES OF BEAM
- RODS DO NOT PASS THROUGH THE FLANGES OF THE BEAM
- NO DRILLING NECESSARY
- MAKE SURE SPRING NUT IS PERPENDICULAR TO CHANNEL OPENING ON SCOREBOARD

04	22 DEC 15	PER EC-22871; ADDED LUBRICANT WARNING	PJS 18704
03	03 JULY 13	ADDED STRUCTURAL NOTE	TTF
02	20 SEP 12	PER EC-7114; REMOVED CHAMFER FROM 0M-133259	LMG
01	06 OCT 11	REPLACED VERTICAL I-BEAM WITH 6" X 6" SQUARE TUBE	JAVA
REV	DATE:		BY:




THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2016 DAKTRONICS, INC. (USA)



PROJECT: OUTDOOR SCOREBOARDS			
TITLE: P1647; POLE MOUNTING OPTIONS			
DATE: 22-DEC-15	DIM UNITS: INCHES [MILLIMETERS]	SHEET	REV
SCALE: 1/5	DO NOT SCALE DRAWING	1 OF 1	04
DESIGN: DOPPELT	JOB NO. P1647	FUNC - TYPE - SIZE E - 10 - A	1048184
DRAWN: DOPPELT			


BA-618-R/-A/-W

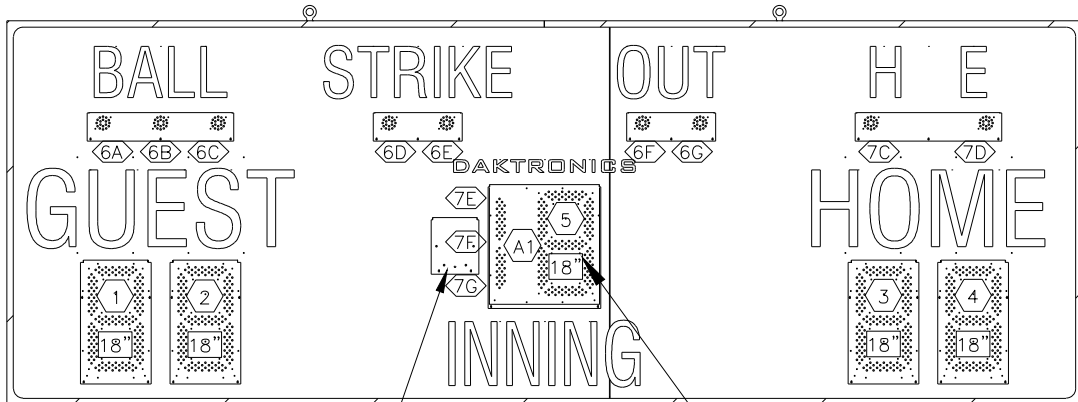

OPTIONAL RADIO

FRONT VIEW
BEFORE JANUARY 2013

PRIMARY DRIVER (A1)
KNOCKOUTS FOR 1/2" CONDUIT
SIGNAL OPTION ON THIS DRIVER
(WIRE, FIBER, OR RADIO)

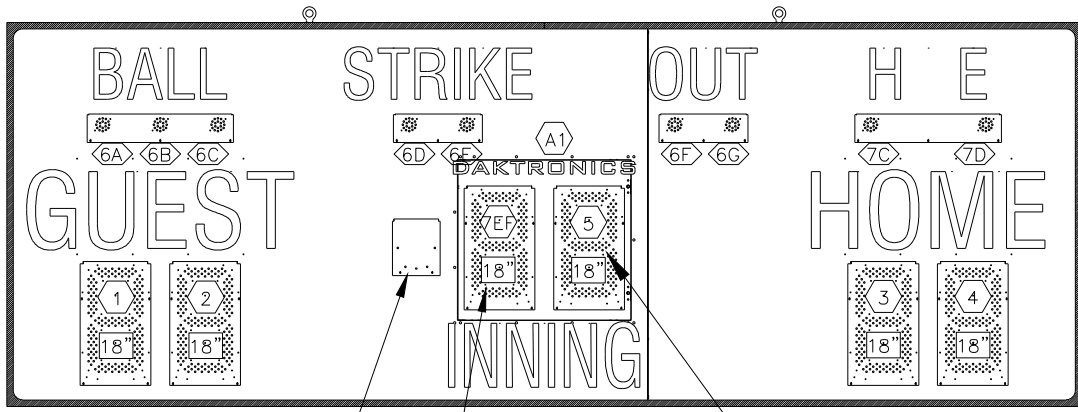

OPTIONAL RADIO


NOT A FULL DIGIT
WILL ONLY LIGHT UP 2 SEGMENTS
TO DENOTE A "1"
THE MAXIMUM INNING COUNT WILL BE 19

FRONT VIEW
AFTER JANUARY 2013

PRIMARY DRIVER (A1)
KNOCKOUTS FOR 1/2" CONDUIT
SIGNAL OPTION ON THIS DRIVER
(WIRE, FIBER, OR RADIO)

NOTES:

- (A1) = DRIVER NUMBER
- (12) = DRIVER CONNECTOR
WIRED TO THAT DIGIT.
- (6A) = DRIVER CONNECTOR
AND SEGMENT (PIN) NO.
WIRED TO THAT INDICATOR
- (18") = DIGIT SIZE

 DAKTRONICS, INC. BROOKINGS, SD 57006 DO NOT SCALE DRAWING	THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2011 DAKTRONICS, INC.		
	PROJ: OUTDOOR LED SCOREBOARDS TITLE: COMPONENT LOCATION; BA-618-201X-R/A/W		
DESIGN: KDRAGT	DRAWN: MJOHNSO		DATE: 17 AUG 11
SCALE: 1=30			
SHEET	REV	JOB NO:	FUNC-TYPE-SIZE
	03	P1647	R-08-A
			1066028

REV 03	DATE: 04 AUG 20	PER CN-107571 REMOVED LABELS TO MOVE TO NEW STANDARD	BY: TAN
REV 02	DATE: 27 FEB 15	PER EC-17119, REMOVED DETAIL A ADDED SIGNAL OPTION NOTE CHANGED SLAVE AND MASTER DRIVER NAMES	BY: KDB
REV 01	DATE: 19 DEC 12	UPDATED DRAWING PER EC-8626	BY: MBJ

Attachment B

Daktronics Outdoor LED Scoreboards Installation Manual P1647-1753 (OR EQUAL)

OUTDOOR LED SCOREBOARDS

INSTALLATION MANUAL

P1647/1753

DD2956757
Rev 09
03 August 2021

Single-Section Models		
ADPC-2023	BA-2518	MS-2032
ADPC-2031	BA-2618	MS-2126
ADPC-2033	BA-2715	MS-3918
ADPC-2034	BA-2718	RO-2010
ADTI-2003	CR-2002	RO-2011
ADTI-2019	CR-2003	RO-2019
ADTI-2032	FB-824	SO-918
BA-618	FB-4005	SO-2008
BA-624	FB-2030	SO-2013
BA-2005	FB-2036	SO-2918
BA-2010	FB-2037	TI-218
BA-2014	FB-2038	TI-2003
BA-2017	MS-915	TI-2010
BA-2019	MS-918	TI-2012
BA-2022	MS-2002	TI-2015
BA-2023	MS-2004	TI-2019
BA-2030	MS-2006	TI-2024
BA-2031	MS-2012	TI-2032
BA-2032	MS-2024	TI-2033
BA-2033	MS-2025	TI-2034
BA-2034	MS-2028	TI-2035
BA-2035	MS-2029	
BA-2515	MS-2030	

Multi-Section Models		
BA-1518	FB-2020	MS-2009
BA-2025	FB-2021	MS-2027
BA-2026	FB-2022	MS-2031
BA-2027	FB-2023	MS-2918
BA-2028	FB-2024	SO-2011
BA-2029	FB-2025	SO-2019
BA-2125	FB-2026	SO-2021
BA-2127	FB-2027	SO-2023
FB-2018	FB-2028	SO-2043
FB-2019	FB-3010	

Modular Football Models	
FB-2500 Series	FB-2600 Series

Hybrid Football Models
FB-2700 Series

Tennis Models	
TN-2603	TN-2651
TN-2604	TN-2652
TN-2605	TN-2653
TN-2606	TN-2654
TN-2607	TN-2655
TN-2609	TN-2656
TN-2650	TN-2657

Pari-Mutuel Models	
PM-2100	PM-2108
PM-2101	PM-2109
PM-2102	PM-2110
PM-2103	PM-2111
PM-2104	PM-2112
PM-2105	PM-2113
PM-2106	PM-2114
PM-2107	

FCC Statement

Supplier Declaration of Conformity (SDoC)

This product complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at their own expense.

Warning: The user is cautioned that changes and modifications made to the equipment without the approval of manufacturer could void the user's authority to operate this equipment.

Industry Canada Regulatory Information

This Class A digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

Inquiries

Contact Daktronics with any questions regarding our product compliance.

Mail:

Daktronics
201 Daktronics Dr.
Brookings, SD 57006 USA

Phone:

800-325-8766

Website:

www.daktronics.com



DAKTRONICS

Copyright © 2015-2021

All rights reserved. While every precaution has been taken in the preparation of this manual, the publisher assumes no responsibility for errors or omissions. No part of this book covered by the copyrights hereon may be reproduced or copied in any form or by any means—graphic, electronic, or mechanical, including photocopying, taping, or information storage and retrieval systems—without written permission of the publisher.

Daktronics trademarks are property of Daktronics, Inc. All other trademarks are property of their respective companies.

Table of Contents

1	Introduction	1
	Important Safeguards.....	1
	Specifications Label	1
	Resources	1
	Troubleshooting	2
	Display Controllers	2
	Sport Codes	3
	Product Safety Approval	3
2	Mechanical Installation	4
	Lifting.....	4
	Extruded Cabinet Mounting.....	5
	I-Beam Clamps.....	6
	I-Beam Clamps (with LVX Displays)	7
	Clamping Angles.....	8
	Mounting Tubes	8
	Sheet Metal Cabinet Mounting	9
	Clamping Angles.....	9
	I-Beam Clamps.....	10
	Ad Panel Mounting	11
	Clamping Angles.....	11
	I-Beam Clamps.....	12
	Unistrut Attachment.....	13
	I-Beam Clamps (with LVX Displays)	14
3	Electrical Installation	15
	Installation Overview.....	15
	Power	16
	Grounding	17
	Installation with Ground and Neutral Conductors Provided	17
	Installation with Only a Neutral Conductor Provided	17
	Lightning Protection	17
	Connection	18
	Multi-Court Tennis Power Connection	19
	Power-On Self-Test (POST).....	20
	Wired Signal Connection.....	20
	Copper Signal.....	20
	Fiber Optic Signal	21
	Multiple Driver Connections	21
	Wireless Signal Connection	21
	All Sport Radio Control	21
	RC-200 Control.....	21
	Radio Settings	22
	Power/Signal Connections Between Sections.....	22

Table of Contents

Two-Section Models	22
Four-Section Models	23
BA-2026 and BA-2028	23
BA-2029.....	24
FB-2028.....	25
Split Scoreboard Interconnect	25
Modular Football Scoreboards	26
Three-Section Tennis Models.....	27
Four-Section Tennis Models.....	28
Pari-mutuel Displays.....	29
4 Scoreboard Options	30
Time of Day Mode	30
Team Name Message Centers and Electronic Captions	31
Trumpet Horns	31
Time Outs Left (T.O.L) Digits.....	31
Changeable Caption Kits.....	31
Protective Devices	31
5 Daktronics Exchange and Repair & Return Programs	32
Exchange Program	32
Repair & Return Program.....	33
Daktronics Warranty & Limitation of Liability	33
A Specifications.....	35
B Reference Drawings	37
C Daktronics Warranty & Limitation of Liability.....	51

1 Introduction

This manual explains the installation of Daktronics Outdoor LED Scoreboards. For additional information regarding the safety, installation, operation, or service of these displays, refer to the telephone numbers listed in **Section 5: Daktronics Exchange and Repair & Return Programs (p.32)**. This manual is not specific to a particular installation.

Important Safeguards

- Read and understand all instructions before beginning the installation process.
- Properly ground the cabinet with a grounding electrode at the display location.
- Disconnect the display power when not in use or when servicing.
- Disconnect the display power before servicing power supplies to avoid electrical shock. Power supplies run on high voltage and may cause physical injury if touched while powered.
- Do not modify the structure or attach any panels or coverings to the display without the express written consent of Daktronics.
- Do not disassemble control equipment or electronic controls of the display; failure to follow this safeguard will make the warranty null and void.
- Do not drop the control equipment or allow it to get wet.

Specifications Label

Power specifications as well as serial and model number information can be found on an ID label affixed to the display, similar to the one shown in **Figure 1**.


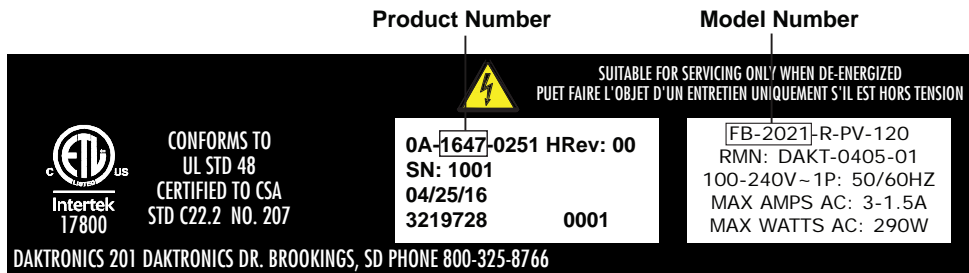


Figure 1: Specifications Label

Please have the assembly number, model number, and the date manufactured on hand when calling Daktronics customer service to ensure the request is serviced as quickly as possible. Knowing the facility name and/or job number will also be helpful. Note that the Product Number(s) are sometimes used to distinguish different generations of displays that have the same model number.

Resources

Figure 2 illustrates a Daktronics drawing label. This manual refers to drawings by listing the last set of digits. In the example, the drawing would be referred to as **DWG-1007804**. All references to drawing numbers, appendices, figures, or other manuals are presented in bold typeface.

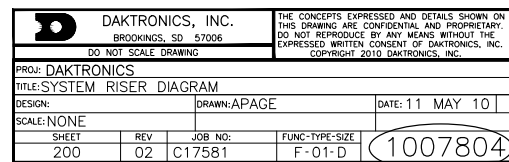

Drawing Number

Figure 2: Drawing Label

Any drawings referenced in a section are listed at the beginning of it as shown below:

Reference Drawings:

System Riser Diagram **DWG-1007804**

Daktronics identifies manuals by the DD or ED number located on the cover page.

Listed below are drawing types commonly used by Daktronics, along with the information typically provided. All drawings referenced in this manual are found in the appendices.

- **Schematic Drawings:** describe internal power and signal wiring as well as interconnections between display sections; they may also include digit designations and driver addressing information
- **Shop Drawings:** describe mounting methods to structural elements, access method (front or rear), and power and signal entrance points
- **System Riser Diagrams:** describe power/signal connections between components and the control location; they may also include control room layout and schematic
- **Final Assembly Drawings:** describe internal component locations and detailed product appearance with part numbers and quantities

Project-specific information takes precedence over any other general information found in this manual. Ensure all applicable material has been gathered before beginning the installation. Contact a Daktronics sales coordinator or project manager.

Troubleshooting

For an extensive troubleshooting guide, instructions on how to replace display components, and detailed schematic drawings, refer to the following manual, available online at www.daktronics.com/manuals:

- **Outdoor LED Scoreboards with Gyrus Driver Service Manual (DD3000541)**

Display Controllers

The All Sport® 5000, All Sport® 1600, and RC-200 hand-held wireless controller use keyboard overlays (sport inserts) to control numerous sports and display models. Refer to the manuals below for operating instructions. They are provided on a CD with the control consoles, and they are also available online at www.daktronics.com/manuals.

- **All Sport 1600 Series Control Console Operation Manual (ED-12462)**
- **All Sport 5000 Series Control Console Operation Manual (ED-11976)**
- **Remote Control System RC-200 All Sport Operation Manual (DD3572889)**

Note: DakTennis software is required for multi-court tennis scoreboards with optional TNMCs. See **DakTennis Version 3 Installation & Operation Manual (DD1965926)**.

Daktronics pari-mutuel displays are designed to be controlled by third-party tote software. Software providers must have permission to output data in a specific format for Daktronics displays. Contact Daktronics for approved providers. Refer to the documentation from the particular software provider for operating instructions.

The DAK Score app and All Sport MX-1 interface box provide a way to control Daktronics scoreboards using a compatible tablet or mobile device. Visit www.daktronics.com/allsportMXsupport to download the app, view the quick guide below, and access other setup, operation, and troubleshooting information.

- **All Sport MX-1 Quick Guide (DD3667023)**

Sport Codes

The following table lists common All Sport and RC-200 sport codes. Note that many scoreboards are capable of scoring multiple sports. Refer to the appropriate controller operation manual for a complete listing of sport codes.

Sport	All Sport 5000 Codes	All Sport 1600 Codes	RC-200 Codes
Baseball	5501	03 (23 = clock)	03 (23 = clock)
Pitch & Speed	5500	N/A	N/A
Football	6601	01	61
Lacrosse / Field Hockey	4601	01	01
Soccer	7701	01	01
Tennis	220	08	08
Track	8601 (manual)	N/A	N/A

Product Safety Approval

Daktronics outdoor displays are ETL-listed, tested to CSA standards, and CE-labeled for outdoor use. Contact Daktronics with any questions regarding testing procedures.

2 Mechanical Installation

Mechanical installation consists of installing concrete footing and steel beams and mounting the display and accompanying ad panels to the beams. The product specification sheets listed in **Appendix A** include installation specification drawings that show the recommended number of beams and spacing between them. The drawings also indicate the size of beams required to support the display at different heights and at various wind speeds. **For Modular Football scoreboards and Pari-Mutuel displays, refer to site-specific diagrams for proper placement and mounting method.**

Any column and footing size dimensions are to assist with estimating installation costs; they are estimates only and are not intended for actual construction purposes. Be sure that the installation complies with local building codes and is suitable for the particular soil and wind conditions. The columns, footings, and all connection details must be designed and certified by a professional engineer licensed to practice in the state of the display installation.

Note: Daktronics assumes no liability for any installation derived from the information provided in this manual or installations designed and installed by others.

Lifting

Displays and display sections ship equipped with 1/2" shoulder-type eyebolts located along the top of the cabinet for the purpose of lifting.

Whenever possible, use a spreader bar, or lifting bar, to lift the display. Spreader bars ensure force on the eyebolts remains straight up, minimizing lifting stress.

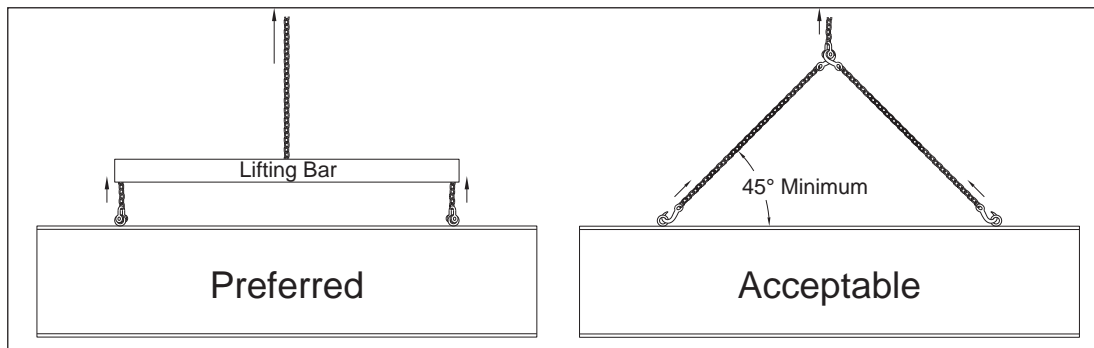


Figure 3: Lifting Methods

Figure 3 illustrates the preferred lifting method on the left and an acceptable alternative lifting method on the right. When lifting the cabinet:

- Use a spreader bar if possible.
- Use every lifting point provided.

Avoid using other lifting methods. Cables and chains attached to the eyebolts and directly to a center lifting point, as shown in the "Acceptable" example in **Figure 3**, can create a dangerous lateral force on the eyebolts and may cause them to fail. The smaller the angle between the cable and the top of the cabinet, the lighter the cabinet must be to safely lift it. If this method must be used, ensure a minimum angle between the chain and cabinet of at least 45°.

Do NOT attempt to lift the cabinet if the angle is less than 45°. Exceeding load angles or weight limits could cause the bolts in the cabinet to buckle, resulting in serious damage to the equipment or injury to personnel. Also, loads should be applied directly in the plane of the eyebolt as shown in **Figure 4**.

Note: Daktronics assumes no liability for damages resulting from incorrect setup or lifting methods. Eyebolts are intended for lifting only. Do not attempt to permanently support the cabinet by the eyebolts or eyebolt holes.

In typical multi-section installations, the lowest display section is installed first and secured to the support beams. The upper sections are then placed atop or above the lower sections and attached to the beams.


If installers remove the eyebolts, plug the holes with bolts and the rubber washers that are used with the eyebolts. Apply silicone or another waterproof sealant to the eyebolt openings. Also inspect the top and sides of the display for any other holes that may allow moisture to enter the display, then plug and seal those openings.

Extruded Cabinet Mounting


Four standard mounting methods are available for displays with extruded cabinets. Each method requires spring nuts to be inserted into the rear channels of the cabinet.

Note: Do not use lubrication on any mounting hardware or the warranty will be void!

1. Insert spring nuts into the top and bottom cabinet channels. Twist the spring nuts until they are perpendicular to the channel (**Figure 5**).
2. Measure the beam spacing and position a spring nut on either side of the beams. Each display section requires four spring nuts per beam (two at the top and two at the bottom).

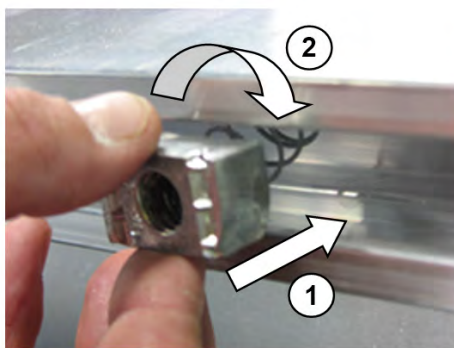

1) Insert into channel 2) Twist

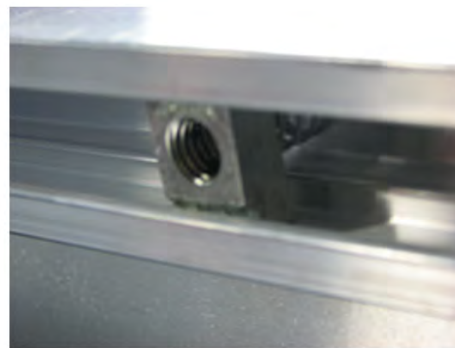

Correct spring nut position

Figure 5: Spring Nut Insertion

Once the spring nuts are in place, refer to the appropriate section that follows for the type of mounting hardware provided with the display.

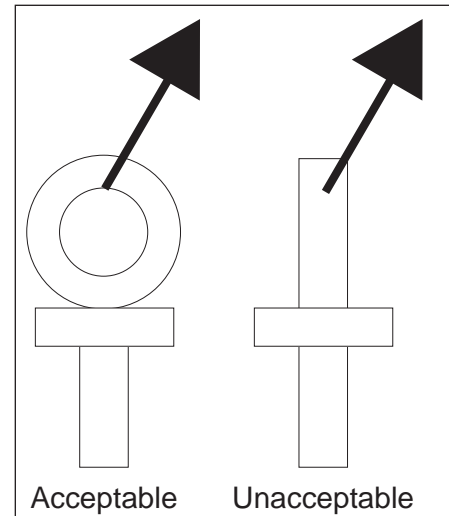


Figure 4: Eyebolt Plane Load

I-Beam Clamps

Reference Drawings:

P1647; I-Beam Clamp Mounting	DWG-1052565
P1647; DSA I-Beam Clamp Mounting	DWG-1064893
Mtg Straps, 4 Sec SCBD on 3 Poles	DWG-1115341

Use this mounting method to mount a display to I-beams with a flange thickness of 1/4" – 3/4". If the flange is thicker than 3/4", longer bolts will be required at added expense.

Mounting hardware includes spring nuts, I-beam clamps, 1/2-13 x 3" bolts, 1/2" flat washers, and 1/2" lock washers. Refer to **Figure 6** and **DWG-1052565** in **Appendix B**.

1. Position a display section at the front of the beams, and lift it to the desired height.
2. Slide a lock washer, flat washer, and I-beam clamp onto each bolt, and loosely screw the bolts into each spring nut. Position each of these I-beam clamp assemblies as close to the I-beam flanges as possible.
3. Make final adjustments to the display section position to ensure it is flush and level, and then firmly tighten all of the bolts.
4. Repeat **Steps 1–3** with all display sections.

Note: When mounting four-section displays to three beams, mounting straps are required on the rear channel along the middle beam to join the horizontal sections together. Refer to **DWG-1115341** for more information.

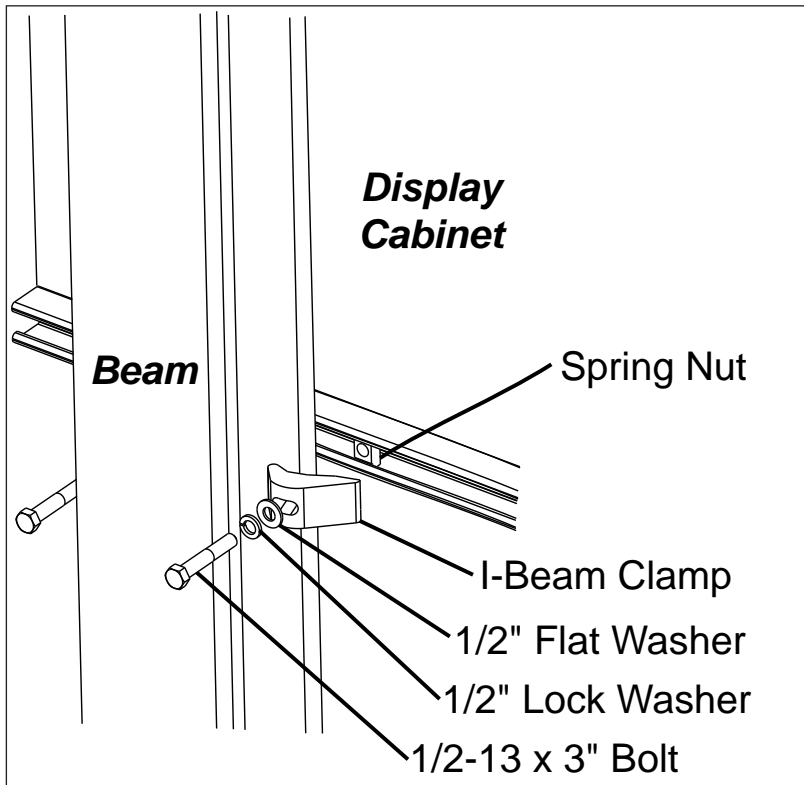


Figure 6: I-beam Clamp Mounting, Rear Rotated View

Note: For DSA (California) approved mounting to I-beams, refer to **DWG-1064893**.

I-Beam Clamps (with LVX Displays)

Reference Drawings:

Mtg Straps, 4 Sec SCBD on 3 Poles	DWG-1115341
P1647; LVX I-Beam Clamp Mounting.....	DWG-3918361

This mounting method adds space between the scoreboard and beams to make the front flush with an LVX video display. Use this mounting method to mount to I-beams with a flange thickness of 1/4" – 3/4". If the flange is thicker than 3/4", longer bolts will be required at added expense.

Mounting hardware includes unistrut, spring nuts, I-beam clamps, 1/2-13 x 1.5" bolts, 1/2-13 x 3" bolts, 1/2" flat washers, and 1/2" lock washers. Refer to **Figure 7** and **DWG-3918361** in **Appendix B**.

1. Position a display section at the front of the beams, and use four 1/2-13 x 1.5" bolts to attach pieces of unistrut to four spring nuts in the upper and lower rear channels, ensuring they line up with each vertical beam.
2. Lift the display section to the desired height.
3. Slide a lock washer, flat washer, and I-beam clamp onto two 1/2-13 x 3" bolts, and loosely screw these bolts into a second set of spring nuts inside the unistrut. Position each of these I-beam clamp assemblies as close to the I-beam flanges as possible.
4. Make final adjustments to the display section position to ensure it is flush and level, and then firmly tighten all of the bolts.
5. Repeat **Steps 1–4** with all display sections.

Note: When mounting four-section displays to three beams, mounting straps are required on the rear channel along the middle beam to join the horizontal sections together. Refer to **DWG-1115341** for more information.

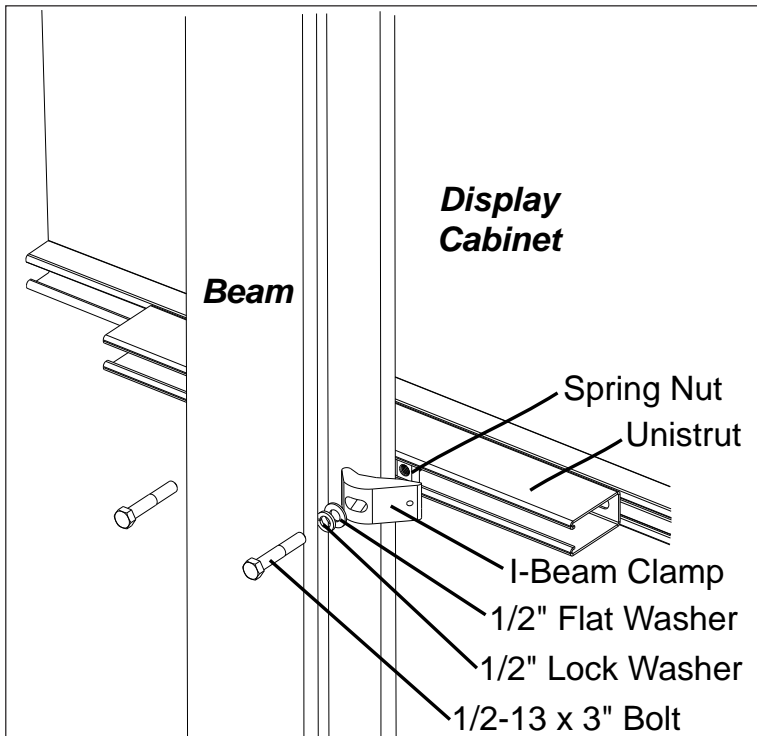


Figure 7: I-beam Clamp Mounting (LVX), Rear Rotated View

Clamping Angles

Reference Drawings:

P1647; Pole Mounting Options DWG-1048184

Use this mounting method to mount a display to I-beams or any beam/pole that does not have flanges. Mounting hardware includes spring nuts; rear clamping angles; 1/2-13 x 24" threaded rods; and 1/2" nuts, flat washers, and lock washers. Refer to **Figure 8** and DWG-1048184 in **Appendix B**.

Note: The threaded rods do not pass through the beams; they run along both sides.

1. Screw a threaded rod into each of the spring nuts as far as it will go.
2. Position a display section at the front of the beams with the threaded rods extending from the rear of the spring nuts, straddling the beams.
3. Lift the display section to the desired height.
4. Slide clamping angles over both rods, and then loosely install the washers and nuts.
5. Make final adjustments to the display section position to ensure it is flush and level, and then firmly tighten all of the 1/2" hex nuts.
6. Repeat **Steps 1–5** for all display sections.

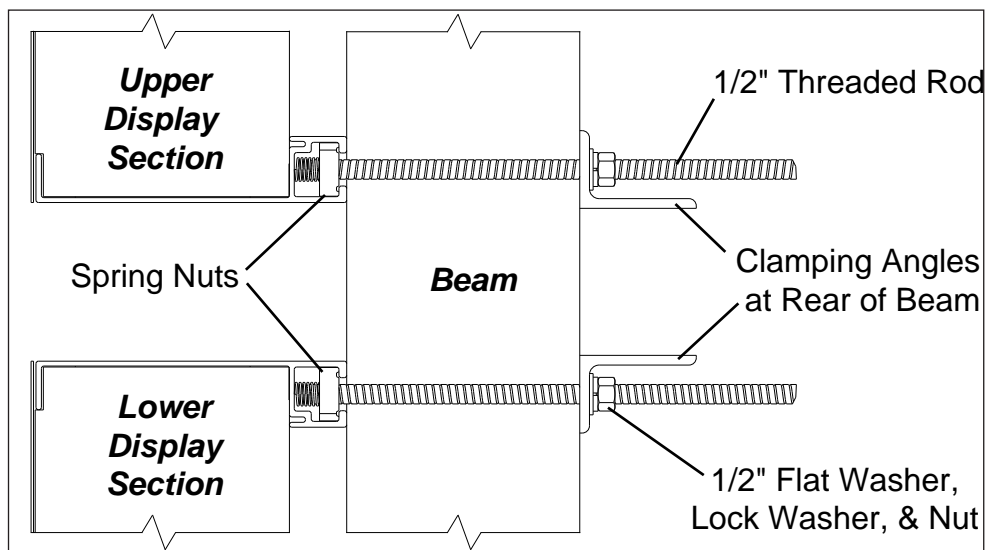


Figure 8: Clamping Angle Mounting, Side View

Mounting Tubes

Use this mounting method to mount a display to horizontal beams. The mounting tubes are attached to the cabinet using spring nuts and 1/2" hardware; this may be done during manufacturing or on site. Refer to **Figure 9** and DWG-1048268 for mounting tube assembly. The clip angles can be adjusted vertically before they are bolted or welded to the horizontal beams. When using this method, recommended attachment method and positioning of display pieces will be provided in **site-specific diagrams**.

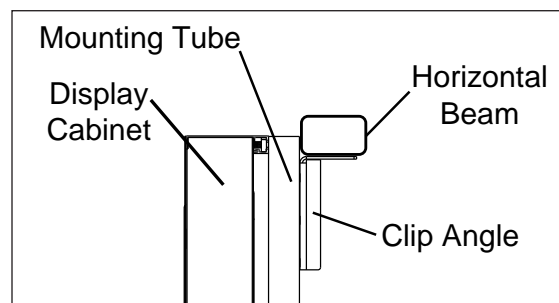


Figure 9: Mounting Tube Attachment, Side View

Sheet Metal Cabinet Mounting

Two standard mounting methods are available for displays with sheet metal cabinets.

Note: Do not use lubrication on any mounting hardware or the warranty will be void!

Clamping Angles

Reference Drawings:

Scoreboard Mounting..... **DWG-1130246**

Mounting hardware includes mounting channels; rear clamping angles; 1/2-13 x 15" threaded rods; and 1/2" square nuts, hex nuts, and lock washers. Refer to **Figure 10** and **DWG-1130246** in **Appendix B**.

Note: The threaded rods do not pass through the beams; they run along both sides.

1. Position the display at the front of the beams, and lift it to the desired height.
2. Place a mounting channel against the upper rear flange of the cabinet next to each beam.
3. Using the mounting channel as a template, drill two 9/16" holes in the upper rear flange of the cabinet where the rods will pass through. The rods should be as close to the beam as possible.
4. Place 1/2" square nuts inside the mounting channel, and thread the rods through the rear flange of the cabinet and the mounting channel.
5. Slide clamping angles over the other ends of both threaded rods, and then loosely install the washers and nuts.
6. Make final adjustments to the display position to ensure it is flush and level, and then firmly tighten all of the 1/2" hex nuts.
7. Repeat **Steps 2-6** for the lower rear flange of the cabinet for every beam.

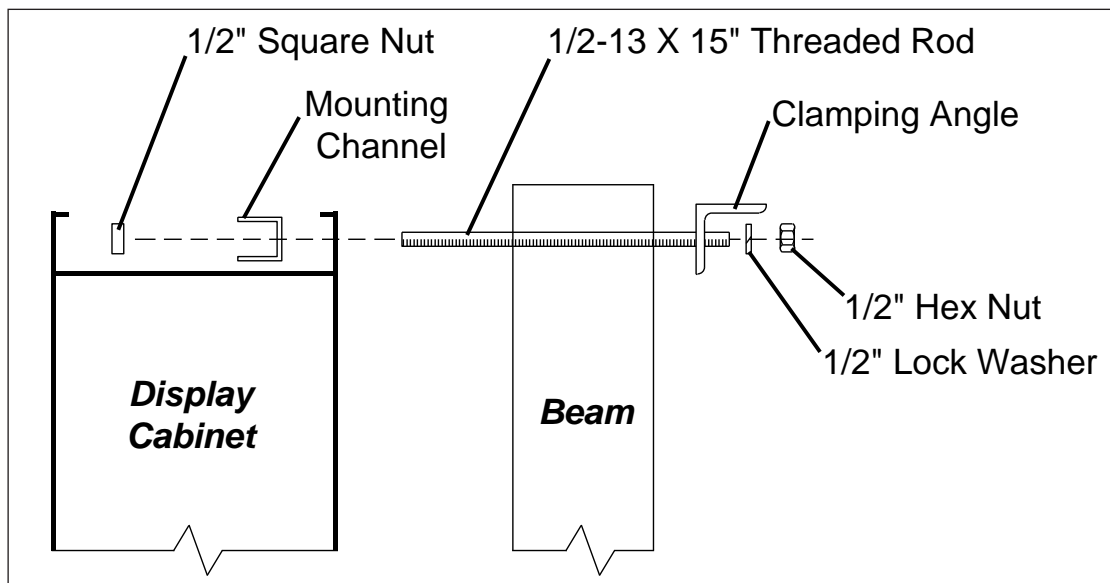


Figure 10: Clamping Angle Mounting (Sheet Metal), Side View

I-Beam Clamps

Reference Drawings:

I-Beam Clamp Mounting, Sheet Metal Attachment..... **DWG-1129110**

Use this mounting method to mount a display to I-beams with a flange thickness of 3/16" – 3/4". If flange is thicker than 3/4", longer bolts will be required at added expense.

Mounting hardware includes mounting channels; washer plates; I-beam clamps; 1/2-13 x 3.5" bolts; self-drilling screws; and 1/2" square nuts, flat washers, and lock washers. Refer to **Figure 11** and **DWG-1129110** in **Appendix B**.

1. Position the display at the front of the beams, and lift it to the desired height.
2. Place a mounting channel against the upper rear flange of the cabinet next to each beam.
3. Using the mounting channel as a template, drill two 9/16" holes in the upper rear flange of the cabinet where the bolts will pass through. The bolts should be as close to the beam as possible.
4. Slide a lock washer, flat washer, and I-beam clamp onto each bolt, and then push the bolts through the holes in the rear flange of the cabinet and into the mounting channel.
5. Place the two washer plates and 1/2" square nuts inside the mounting channel, and loosely tighten the square nut onto the bolts.
6. Make final adjustments to the display position to ensure it is flush and level, and then firmly tighten all of the bolts to **40 ft-lb torque**.
7. Screw the self-drilling screws into the rear flange, snug up against the I-beam clamps.
8. Repeat **Steps 2-7** for the lower rear flange of the cabinet for every beam.

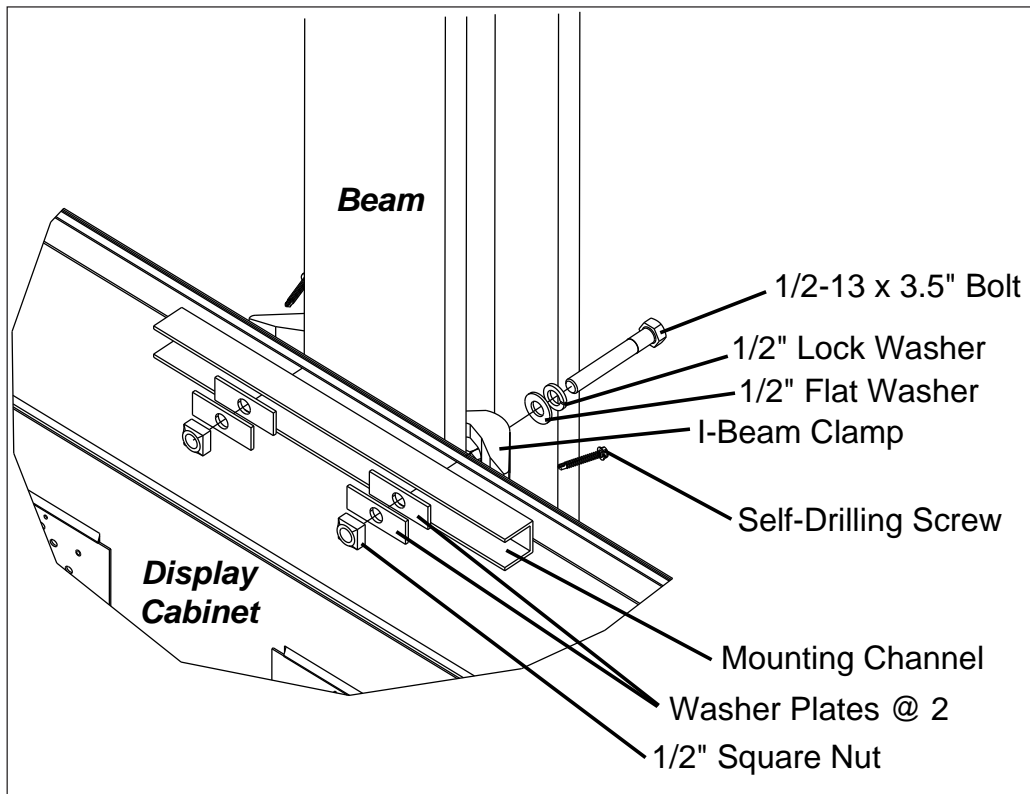


Figure 11: I-Beam Clamp Mounting, Front Rotated View

Ad Panel Mounting

Use the mounting methods outlined in this section for static ad panels. These methods are also used for ADPC and ADTI displays.

Note: Do not use lubrication on any mounting hardware or the warranty will be void!

Clamping Angles

Reference Drawings:

Ad Panel Mounting DWG-52187

Mounting hardware includes mounting channels; rear clamping angles; 1/2-13 x 15" threaded rods; and 1/2" square nuts, hex nuts, and lock washers. Refer to **Figure 12** and **DWG-52187** in **Appendix B**.

Note: The threaded rods do not pass through the beams; they run along both sides.

1. Position the ad panel at the front of the beams, and lift it to the desired height.
2. Using a clamping angle as a template, drill two 9/16" holes in the upper rear flange of the ad panel cabinet where the mounting channel support will be placed.
3. Position a mounting channel inside the ad panel cabinet along the rear flange as shown in **Figure 12**.
4. Place 1/2" square nuts inside the mounting channel, and thread the rods through the rear flange of the ad panel cabinet and the mounting channel.
5. Slide clamping angles over the other ends of both threaded rods, and then loosely install the washers and nuts.
6. Make final adjustments to the ad panel position to ensure it is flush and level, and firmly tighten all of the 1/2" hex nuts.
7. Repeat **Steps 2-6** for every connection point to the beam. For example, if there are two beams, there will be four connection points.

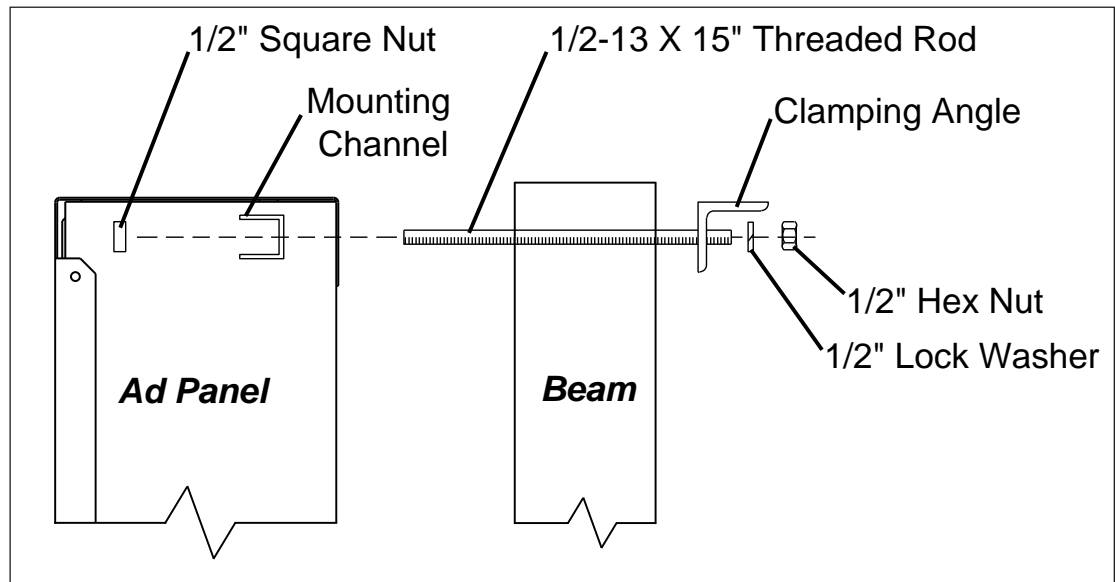


Figure 12: Ad Panel Clamping Angle Mounting, Side View

I-Beam Clamps

Reference Drawings:

I-Beam Clamp Mounting, Sheet Metal Attachment..... **DWG-1129110**

Use this mounting method to mount an ad panel to I-beams with a flange thickness of 3/16" – 3/4". If flange is thicker than 3/4", longer bolts will be required at added expense.

Mounting hardware includes mounting channels; washer plates; I-beam clamps; 1/2-13 x 3.5" bolts; self-drilling screws; and 1/2" square nuts, flat washers, and lock washers. Refer to **Figure 13** and **DWG-1129110** in **Appendix B**.

1. Position the ad panel at the front of the beams, and lift it to the desired height.
2. Place a mounting channel inside the upper rear flange of the ad panel cabinet next to a beam.
3. Using the mounting channel as a template, drill two 9/16" holes in the upper rear flange of the accent cabinet where the bolts will pass through. The bolts should be as close to the beam as possible.
4. Slide a lock washer, flat washer, and I-beam clamp onto each bolt, and then push the bolts through the holes in the rear flange of the ad panel and into the mounting channel.
5. Place the two washer plates and 1/2" square nuts inside the mounting channel, and loosely tighten the square nut onto the bolts.
6. Make final adjustments to the ad panel position to ensure it is flush and level, and then firmly tighten all of the bolts to **40 ft-lb torque**.
7. Screw the self-drilling screws into the rear flange, snug up against the I-beam clamps.
8. Repeat **Steps 2-7** for every connection point to the beam. For example, if there are two beams, there will be four connection points.

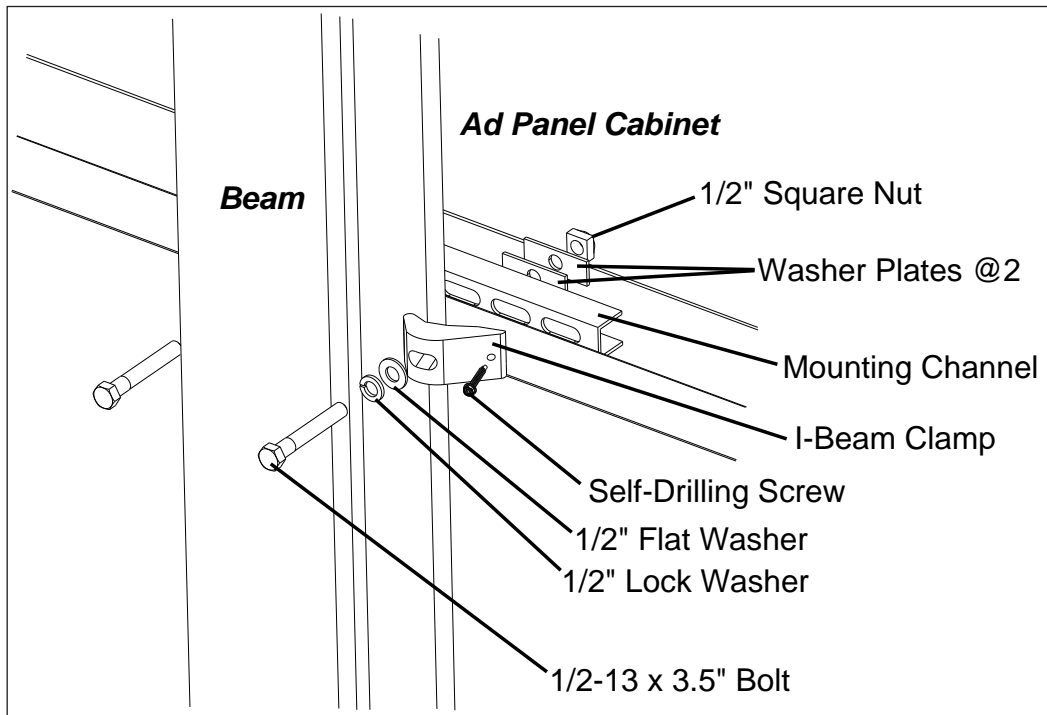


Figure 13: Ad Panel I-Beam Clamp Mounting, Rear Rotated View

Unistrut Attachment

1. Using the backup channel as a template, drill four 7/16" holes in the upper and lower rear flanges of the ad panel where each beam will be located.

Note: Try to ensure that the two center holes will be within the width of the beam.

2. If the ad panel has backsheets, remove them as needed to access the ad panel interior.
3. Attach pieces of unistrut to the ad panel with the included 3/8" hardware, as shown in **Figure 14**.
4. If any backsheets were removed, put them back on at this time.
5. Place spring nuts into the unistrut. Twist the spring nuts until they are perpendicular to the unistrut channel. Refer to **Figure 5** from **Extruded Cabinet Mounting (p.5)**.

Note: Ad panel cabinets require four spring nuts per beam (two at the top and two at the bottom).

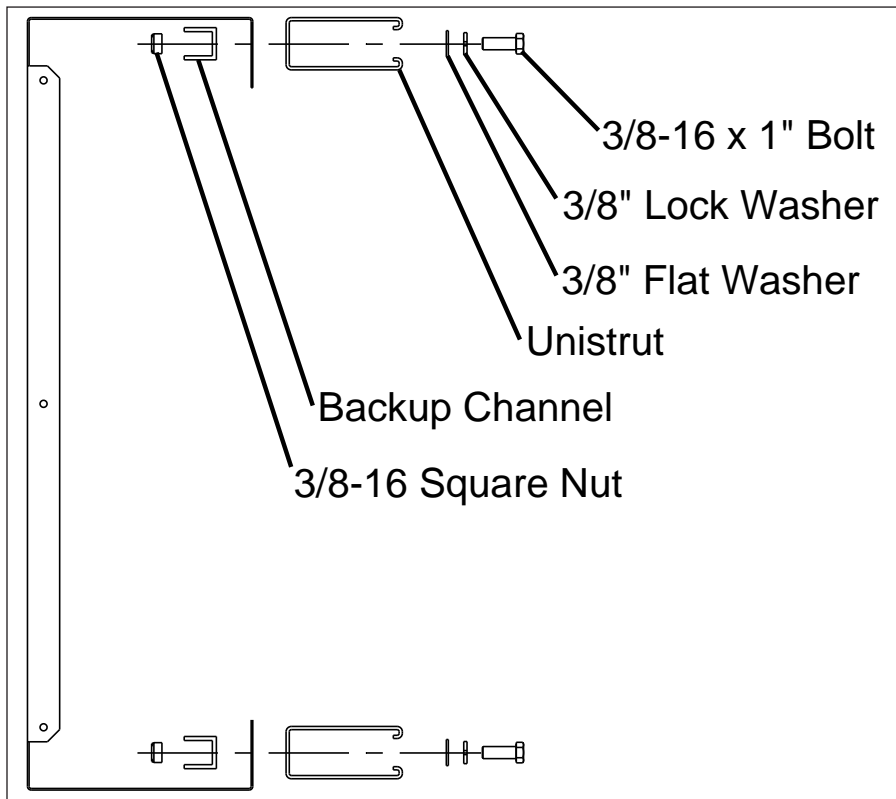


Figure 14: Unistrut Attachment, Side View

Once the unistrut is attached and the spring nuts are in place, refer to the appropriate section that follows for the type of mounting hardware provided with the ad panel.

I-Beam Clamps (with LVX Displays)

Reference Drawings:

LVX Ad Panel I-beam Clamp Mounting DWG-3918326

Use this mounting method to mount an ad panel to I-beams with a flange thickness of 1/4" – 3/4". If flange is thicker than 3/4", longer bolts will be required at added expense.

Mounting hardware includes I-beam clamps, 1/2-13 x 3" bolts, 1/2" flat washers, and 1/2" lock washers. Refer to **Figure 15** and **DWG-3918326** in **Appendix B**.

1. Position the ad panel at the front of the beams, and lift it to the desired height.
2. Slide a lock washer, flat washer, and I-beam clamp onto each bolt, and loosely screw the bolts into the spring nuts. Position each of these I-beam clamp assemblies as close to the I-beam flanges as possible.
3. Make final adjustments to the ad panel position to ensure it is flush and level, and then firmly tighten all of the bolts.

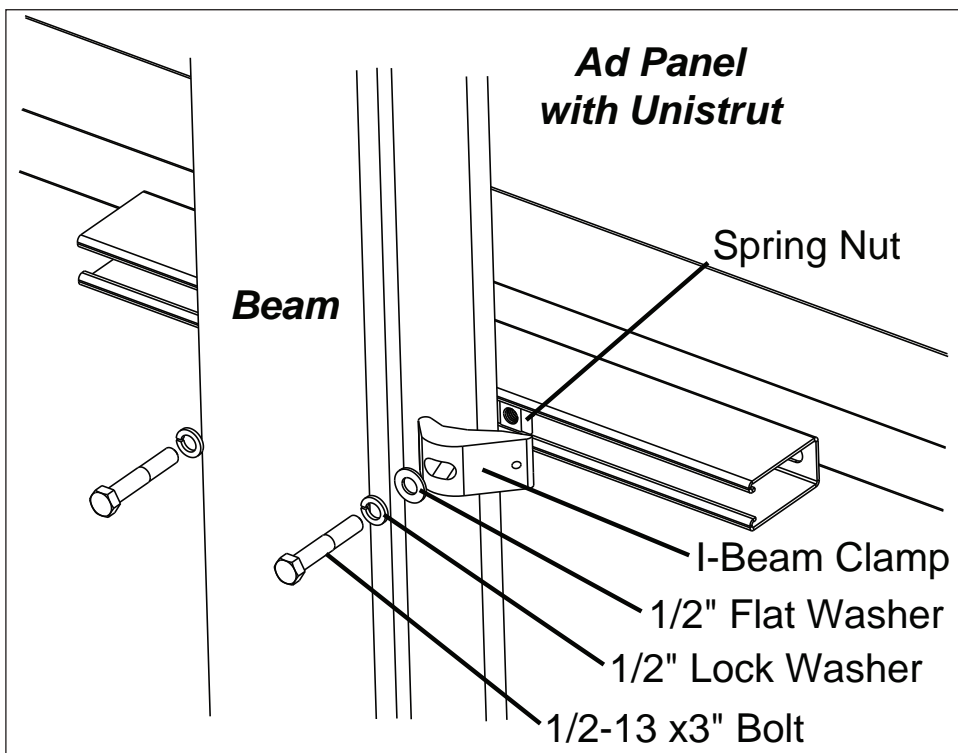


Figure 15: Ad Panel I-beam Clamp Mounting (LVX), Rear Rotated View

3 Electrical Installation

CAUTION: Only qualified individuals should perform routing and termination to the display. Electrical contractors are responsible for ensuring that all electrical work meets or exceeds local and national codes. Daktronics engineering staff must approve all changes or the warranty will be void.

Electrical installation consists of the following processes:

- Providing power and ground to a disconnect near the display.
- Routing power and ground from the main disconnect to the display power/signal enclosure.
- Routing the control signal cable from the control location to the display location and/or installing the wireless radio receiver.

Installation Overview

Figure 16 illustrates a wired setup between a multi-section outdoor display and controller. Daktronics part numbers are shown in parentheses.

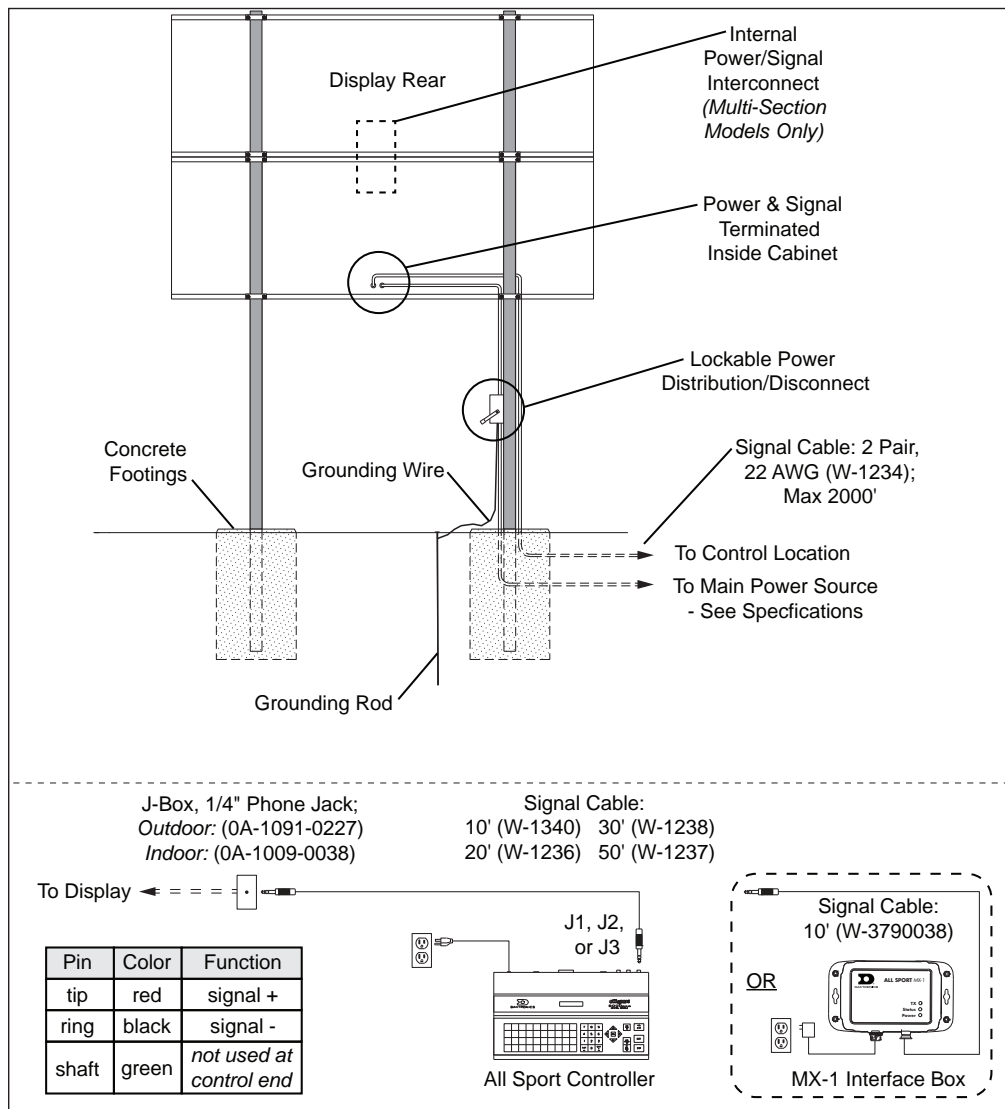


Figure 16: Wired Installation Example

Figure 17 illustrates a wireless setup between a football scoreboard and controller. Note that the RC-200 handheld controller and base station system is typically only available for use with smaller single-section displays and for single- or multi-court tennis scoreboards.

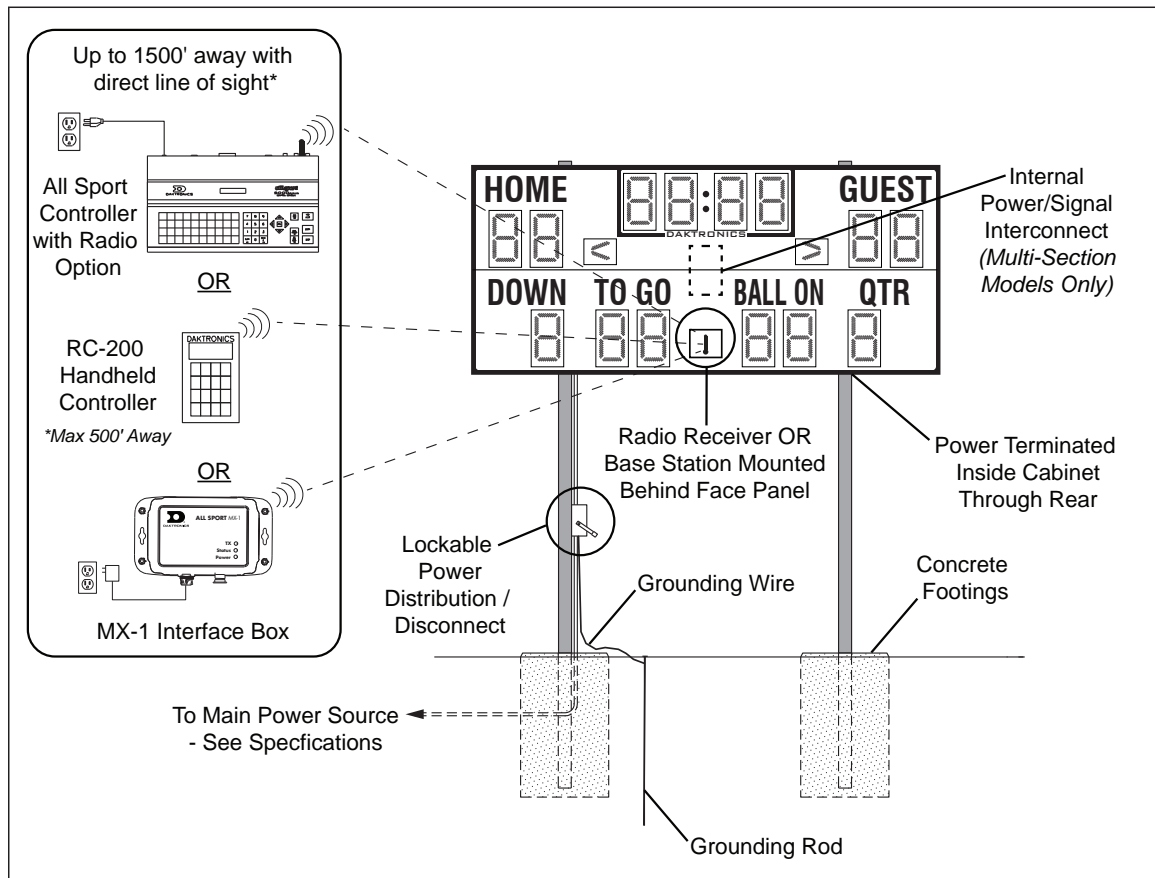


Figure 17: Wireless Installation Example

For additional installation examples, such as for multi-court tennis systems, refer to the System Riser drawings attached to the controller manual listed in **Display Controllers** (p.2).

Power

Only qualified individuals should complete the electrical installation; untrained personnel should not attempt to install these displays or any of the electrical components. Improper installation can seriously damage the equipment and be hazardous to personnel.

Refer to the specification label on the display (**Figure 1**), the label inside the display (**Figure 19**), or the product specification sheets shipped with it (and listed in **Appendix A**) to determine maximum power requirements. Ensure all external overcurrent protection meets all local and national electrical codes and is appropriately sized to the load it is terminating. Failure to meet wiring and overcurrent protection device requirements will void the warranty.

Note: Ensure the display is on a dedicated circuit. This will prevent loss of critical game event information that may otherwise occur if another component on the same circuit should fail.

Grounding

All components of a display system – including but not limited to displays, control equipment, and connected peripheral equipment – must be electrically grounded. Only qualified individuals may perform electrical work, including verification of ground resistance. Daktronics is not responsible for improper grounding or damage incurred as a result of improper grounding.

Grounding methods must meet the provisions of all applicable local and national codes. Inspect and verify all grounding methods meet the provisions of all applicable local and national codes.

Proper grounding is necessary for reliable equipment operation and general electrical safety. Failure to properly ground the display system may void the warranty, disrupt operation, damage equipment, and cause bodily harm or death.

There are two types of power installation: installation with ground and neutral conductors provided, and installation with only a neutral conductor provided. These two power installations differ slightly, as described in the following subsections:

Installation with Ground and Neutral Conductors Provided

For this type of installation, the power circuit must contain an isolated earth-ground conductor. In this circumstance, do not connect neutral to ground at the disconnect or at the display as this would violate electrical codes and void the warranty.

Use a disconnect so that all ungrounded lines can be disconnected. The local and national electrical codes may require using a lockable power disconnect at or within sight of the display.

Installation with Only a Neutral Conductor Provided

Installations where no grounding conductor is provided must comply with local and national electrical codes. If the installation meets all requirements, observe the following guidelines:

- Connect the grounding electrode cable at the local disconnect, never at the display driver/power enclosure.
- Use a disconnect that opens all of the ungrounded phase conductors.

Lightning Protection

The use of a disconnect near the display location to completely cut all current-carrying lines significantly protects the circuits against lightning damage. Local and national electrical codes may also require it. In order for this system to provide protection, the power must be disconnected when the display is not in use.

The control console also should be disconnected from power and from the signal junction box when the system is not in use. The same surges that may damage the display components can also damage the console's circuitry.

Connection

Power and signal cables are routed into the display from the rear via separate conduits. All power and signal wiring terminates at the primary driver enclosure. Note that systems with radio control typically only require signal wiring for backup purposes.

Refer to the component location drawings attached to the product specification sheets listed in **Appendix A** for precise power/signal termination location for each model. For modular and hybrid football scoreboard component locations, refer to the service manual listed in **Troubleshooting (p.2)**.

1. Look for a warning label similar to **Figure 18** to locate the access panel to the driver enclosure.
2. Remove the screws or loosen the latches to open the access door panel.
3. Remove the metal cover of the driver enclosure by lifting it up, then back and down to expose the driver components.
4. Connect the power wires coming through the rear of the display to the power terminal blocks, as shown in **Figure 19**.



Figure 18: Power Warning Label

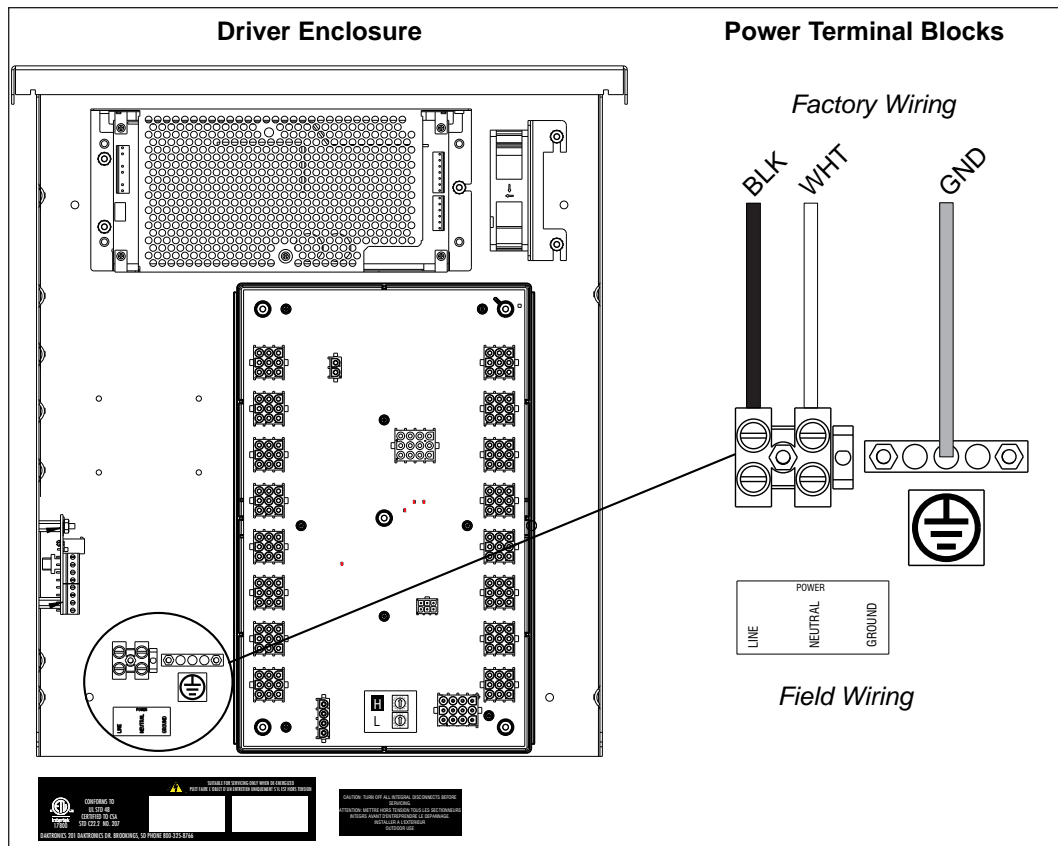


Figure 19: Driver Enclosure & Power Terminal Blocks (Cover Removed)

Some modular scoreboard sections do not receive power via terminal block. Instead, an interconnect harness routes from the nearest scoreboard section. Refer to **Power/Signal Connections Between Sections (p.22)**.

Note: If a power receptacle is needed to operate the control console at the display for troubleshooting, an installation electrician must provide an outlet close to the disconnect box specifically for this purpose.

Multi-Court Tennis Power Connection

Daktronics multi-court tennis scoreboards have a built-in breaker for power termination. Refer to the component location drawings in **Appendix A** for precise power/signal termination location for each model.

1. Route the power cables via conduit into rear of display.
2. Look for a warning label similar to **Figure 18** to locate the appropriate access panel to the power breaker enclosure.
3. Loosen the screws or latches to open the access panel.
4. Route the power cables up through the bottom of the enclosure.
5. Use a flathead screwdriver to rotate the two latches 1/4 turn, and then remove the enclosure cover.
6. Connect the power cables as follows and shown in **Figure 20**:
 - neutral (white) wire to NEUT.
 - live wires to LINE 1 (black) and LINE 2 (red)
 - ground wire (green/yellow) to the grounding buss bar, E41
7. Reattach the metal enclosure cover and secure the access panel.

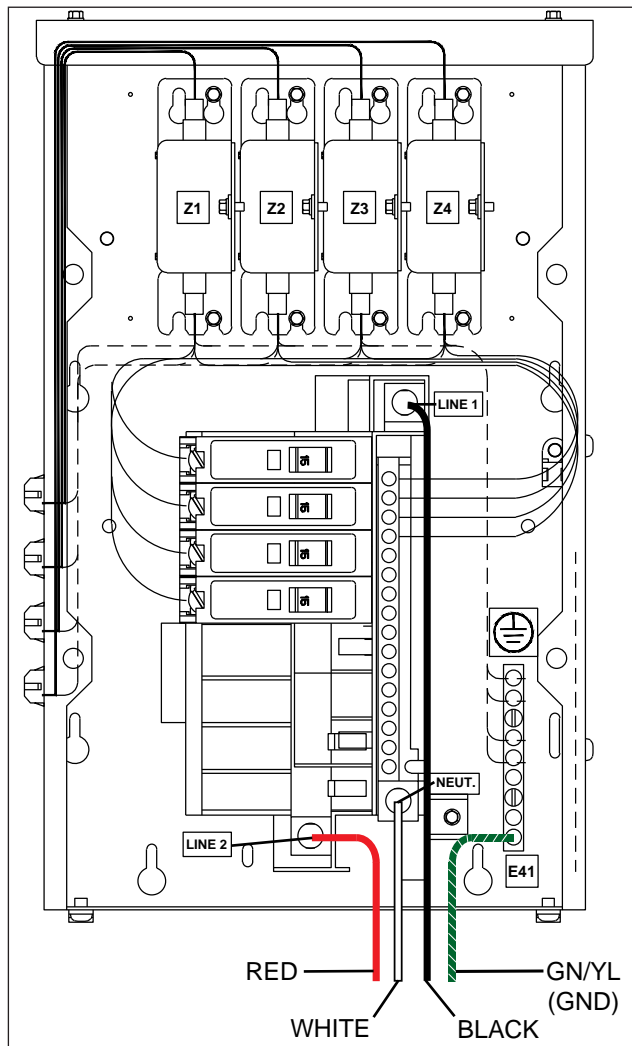


Figure 20: 120/240 VAC Power Panel Termination (Cover Removed)

Power-On Self-Test (POST)

The display performs a self-test each time that power is turned on and the control console is powered off or not connected. If the control console is connected and powered on, the self-test does not run, and data from the control console appears on the display after a few seconds. Each self-test pattern will vary depending on the model, the number of drivers, and types of digits. **Figure 21** shows an example of the LED bar test pattern that each digit performs.

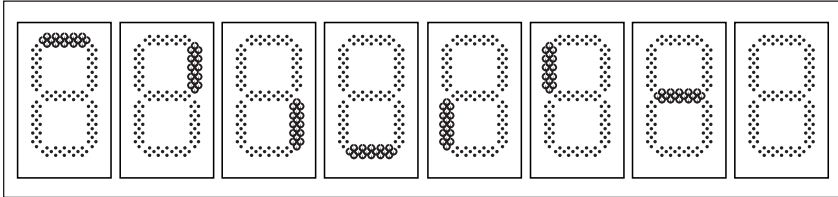


Figure 21: Digit Segment POST

Wired Signal Connection

Copper Signal

Route copper signal cable through the conduit knockout on the rear of the display to the signal surge arrester card (**Figure 22**), located in the primary driver enclosure.

At the **SIGNAL IN** terminal block, connect red signal wire to positive (+) and black signal wire to negative (-).

Note: Ensure shield (silver) wire is properly connected to the **SHLD** terminal.

To connect signal to additional nearby displays, such as delay of game clocks, or to connect multiple modular scoreboard sections, route signal wire in conduit from **SIGNAL OUT** of the signal surge arrester card in the primary display to **SIGNAL IN** on the signal surge arrester card in the secondary display.

At a minimum, single-pair, shielded cable, 22 AWG (part # W-1077) is recommended. Two-pair shielded cable (part # W-1234) is preferred.

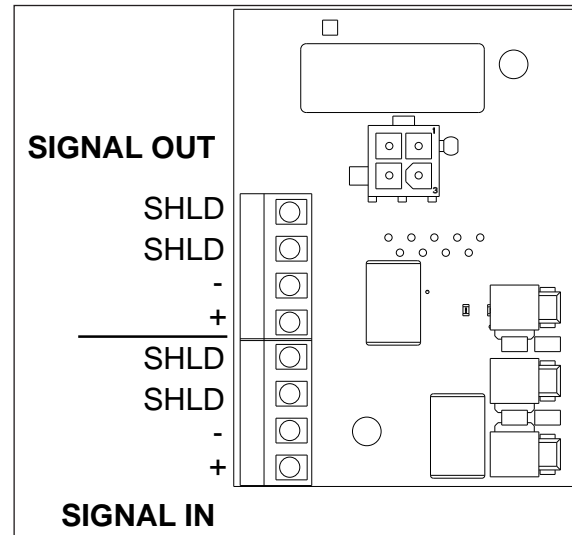


Figure 22: Signal Surge Arrester Card

Fiber Optic Signal

Route fiber optic signal cable through the conduit knockout on the rear of the display. The fiber optic cable is terminated to a male ST-type connector and plugged into the **J3** jack on the fiber card (**Figure 23**), located in the primary driver enclosure.

A minimum cabling of multi-mode, 62.5/125 um, and 2-core fiber cable is recommended (part # W-1242). This method requires a signal converter between the All Sport console's scoreboard output and the fiber optic cable (*not provided by Daktronics*).

To connect signal to additional nearby displays, such as delay of game clocks, or to connect multiple modular scoreboard sections, route **copper** signal wire in conduit from **SIGNAL OUT** of the fiber card in the primary display to **SIGNAL IN** on the signal surge arrester card in the secondary display.

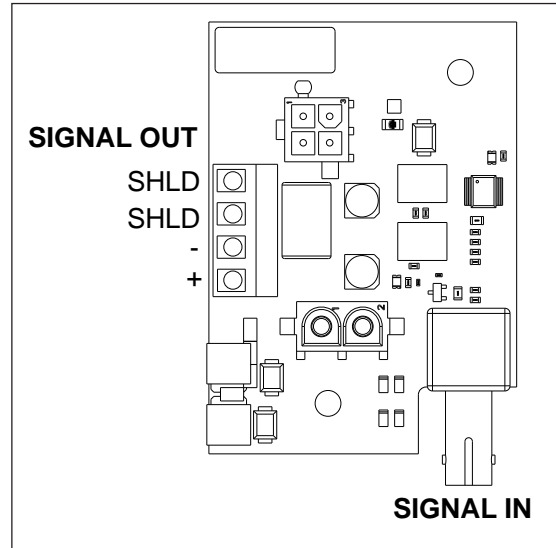


Figure 23: Fiber Card

Multiple Driver Connections

Some display models require multiple drivers that use a primary/secondary driver system. Primary and secondary drivers function identically, but secondary enclosures lack the power termination block and signal surge arrester (or fiber) card. When one section has multiple drivers, they simply plug into one another, and this is done at the factory. Drivers between sections, however, require additional on-site connection. Refer to **Power/Signal Connections Between Sections (p.22)**.

Note: Scoreboards capable of displaying speed of pitch (SOP) have an additional primary driver. These models also require a separate signal connection (either wired or radio) from a dedicated speed of pitch All Sport 5000 console. Refer to the **Baseball Speed of Pitch Systems Configuration Manual (ED-12224)**, available online at www.daktronics.com/manuals.

Wireless Signal Connection

All Sport Radio Control

A wireless radio system requires a radio receiver plugged into the 6-pin **J21** jack on the primary driver and mounted internally to the front panel of the display. For more information, refer to the **Gen VI Radio Installation Manual (DD2362277)**, provided with the receiver unit and available online at www.daktronics.com/manuals.

RC-200 Control

A hand-held RC-200 wireless radio control system requires a base station receiver plugged into the 6-pin **J21** jack on the primary driver and mounted internally to the front panel of the display. For more information, refer to the appropriate manual listed in **Display Controllers (p.2)**.

If an All Sport radio receiver and an RC-200 base station are both installed in the same display, the wireless device that takes precedence is the one that the receiver finds active first; it will control the display until the signal is no longer present.

Radio Settings

With an All Sport radio receiver or RC-200 base station installed, watch for the radio Broadcast settings (“b1”) and Channel settings (“C1”) in the clock digits or Home and Guest scores during the **Power-On Self-Test (POST)** (p.20). Refer to **Figure 24**.


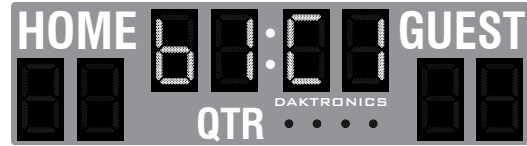


Figure 24: Radio Settings in Clock Digits


These values must match the settings in the control console/scoring app. Refer to the controller screens below and the manual listed in **Display Controllers (p.2)**.



All Sport Radio Settings



RC-200 Radio Settings



DAK Score App Settings

If the radio receiver channel and broadcast settings do match those set in the console/scoring app but the display still cannot be controlled, there may be radio interference. This can occur when a nearby display also uses radio control. In this case, change the settings of the wireless radio receiver inside the display as described in the appropriate controller or radio installation manual.

Note: Models BA-2027, BA-2127, BA-2028, and BA-2029 with radio control will have two radio receivers: one for the main scoreboard, and one for the speed of pitch digits. Both receivers must be set to different channels.

Power/Signal Connections Between Sections

Refer to the component location drawings attached to the product specification sheets listed in **Appendix A** for exact driver locations when connecting multiple display sections.

Two-Section Models

Open the appropriate access panel on the Top Section to locate the coiled bundle of interconnect cable coming from the driver, then route and connect the cables as described below and shown in **Figure 25**. Additional panels may be opened as needed for easier access.

Route the 5-pin interconnect cable from the Top Section down into the Bottom Section; connect the **P42** plug into the **J42A** jack on a Y-cable coming from the Primary Driver.

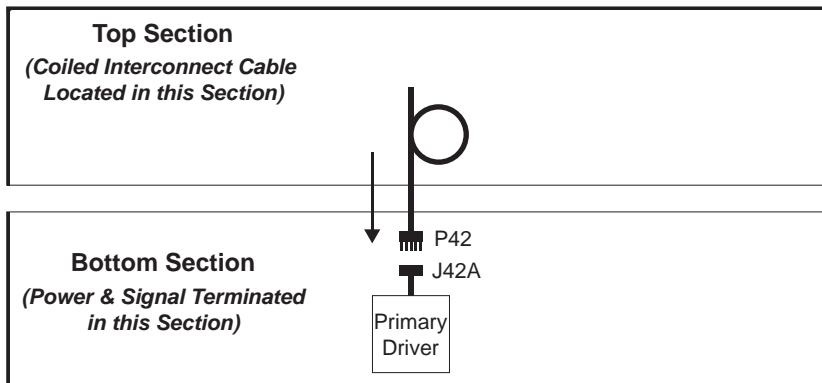


Figure 25: Power/Signal Connection – Two Sections, Excluding BA Models (Front View)

- On the MS-2009 with red/amber digits, there will also be five 9-pin digit harnesses (**P11–P15**) in the Bottom Section that must be routed up into the Top Section and plugged into the mating jacks (**J11–J15**) on the Primary Driver.
- For the BA-2025, BA-2027, BA-2125, and BA-2127, route the 5-pin interconnect cable from the Bottom Section up into the Top Section, and connect the **P42** plug to the **J42** jack coming from the Primary Driver (**Figure 26**).

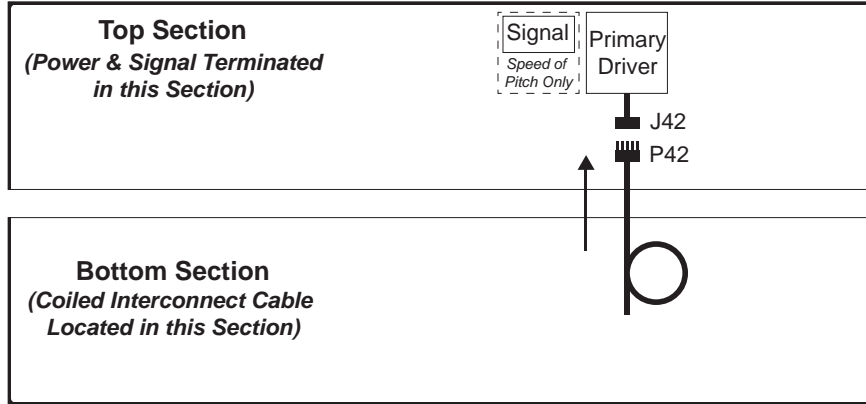


Figure 26: Power/Signal Connection – Two Sections, BA-2025/7, BA-2125/7 (Front View)

- For the BA-2027 and BA-2127, a separate wired signal (copper or fiber optic) must be terminated to a small enclosure in the Top Section to control the speed of pitch digits.
- For the BA-1518 with red/amber digits, there are five 9-pin digit harnesses (**P1–P4 & P15**) in the Top Section that must be routed down into the Bottom Section and plugged into the mating jacks (**J1–J4 & J15**) on the Primary Driver. For the BA-1518 with white digits, there is a single 5-pin interconnect cable coiled in the Top Section that must be routed down into the Bottom Section and connected to the **J42A** jack on a Y-cable coming from the Primary Driver (refer to **Figure 25**).

Four-Section Models

BA-2026 and BA-2028

Open the appropriate access panel on the bottom-left cabinet (Section C) to locate the coiled bundles of interconnect cable coming from the driver, then route and connect the cables as described below and shown in **Figure 27**. Additional panels may be opened as needed for easier access.

1. There are four 9-pin digit harnesses (**P8–P11**) in the upper-right cabinet (Section B) that must be routed into the upper-left cabinet (Section A) and connected to the mating **J8–J11** jacks on the Primary Driver.
2. There are also two separate interconnect cables in Section C:
 - a. Route the 5-pin interconnect cable with the **P42** plug up into Section A, and connect it to the **J42** jack on the Primary Driver.
 - b. Route the 5-pin interconnect cable with the **J43** jack over into the bottom-right cabinet (Section D), and connect to another interconnect cable with the **P42** plug.

Note: For the BA-2028, a separate wired signal (copper or fiber optic) must be terminated to a small enclosure in Section A to control the speed of pitch digits.

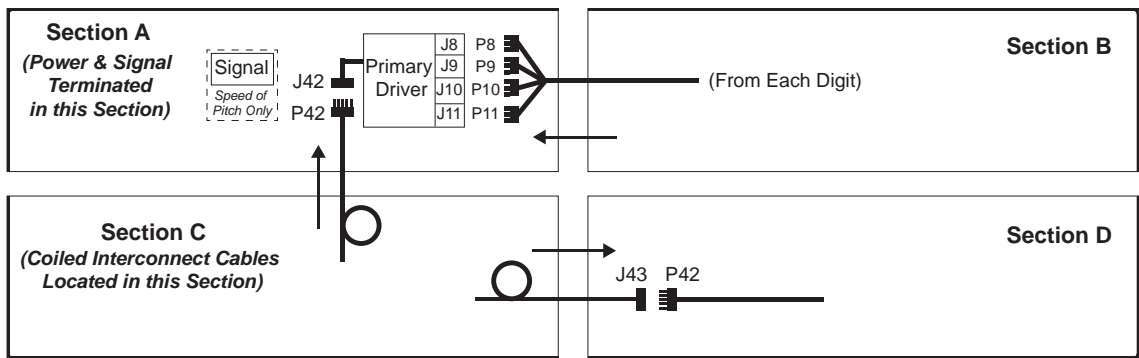


Figure 27: Power/Signal Connection – Four Sections, BA-2026 & BA-2028 (Front View)

BA-2029

Open the appropriate access panel on the bottom-left cabinet (Section C) to locate the coiled bundles of interconnect cable coming from the driver, then route and connect the cables as described below and shown in **Figure 28**. Additional panels may be opened as needed for easier access.

1. There are seven 9-pin digit harnesses (**P1–P7**) in the upper-left cabinet (Section A) that must be routed into the upper-right cabinet (Section B) and connected to the mating **J1–J7** jacks on the Primary Driver.

Note: For models with white digits, the four TIME digits (**P1–P4**) will connect to the Secondary Driver (A7) and the rest will connect to the Primary Driver.

2. There are two separate interconnect cables in Section C:
 - Route the 5-pin interconnect cable with the **P42** plug up into Section A first then over into Section B, and connect it to the **J42** jack on the Primary Driver. For models with white digits, this will connect to the Secondary Driver (A7).
 - Route the 5-pin interconnect cable with the **J43** jack over into the bottom-right cabinet (Section D), and connect it to another interconnect cable with the **P42** plug.

Note: A separate wired signal (copper or fiber optic) must be terminated to a small enclosure in Section B to control the speed of pitch digits.

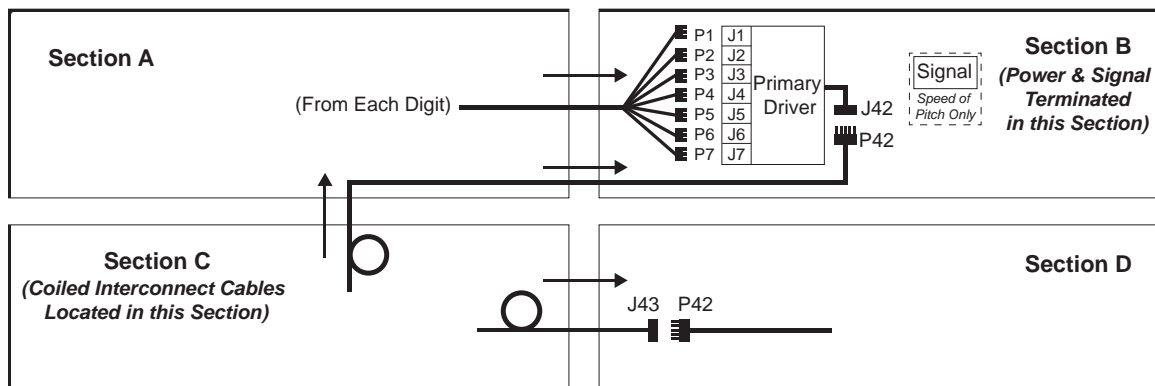


Figure 28: Power/Signal Connection – Four Sections, BA-2029 (Front View)

FB-2028

Open the appropriate access panels on the upper-left (Section A) and bottom-left cabinet (Section C) to locate the coiled bundles of interconnect cable coming from the drivers. Refer to **Figure 29**. Additional panels may be opened for easier access.

1. Route the 5-pin interconnect cable with the **J43** jack from Section C over into the bottom-right cabinet (Section D) and connect it to the **P42** plug on another interconnect cable coming from the Secondary Driver.
2. There will also be two separate interconnect cables in Section A:
 - a. Route the 5-pin interconnect cable with the **J43** jack over into the upper-right cabinet (Section B) and connect it to the **P42** plug on another interconnect cable coming from the Secondary Driver.
 - b. Route the 5-pin (two wire, signal only) cable with the **P42** plug down into Section C, and connect it to the **J42A** jack on a Y-cable coming from the Primary Driver.

Note: The FB-2028 can be thought of as two scoreboards stacked on top of each other. Both Primary Drivers require power termination, but only the A3 driver in Section C requires signal termination from the control location (or a radio receiver installed). Refer to **Power (p.16)** and **Wired Signal Connection (p.20)** or **Wireless Signal Connection (p.21)** for radio.

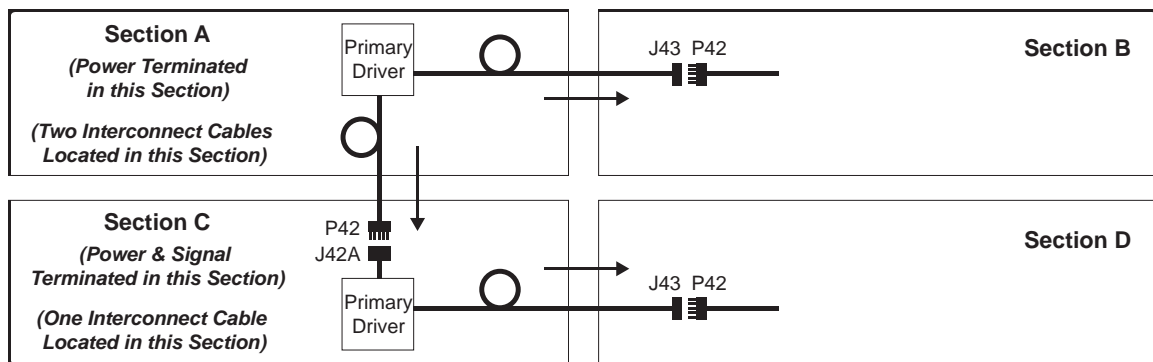


Figure 29: Power/Signal Connection – Four Sections, FB-2028 (Front View)

Split Scoreboard Interconnect

Reference Drawings:

Installation Drawing; Split 2 Sec Scoreboard..... **DWG-1060613**

In some installations, scoreboard sections may be mounted farther apart than the length of the internal interconnect harness will allow. For example, a two-section football scoreboard may have a message display in between the top and bottom sections. In these instances, a Split Scoreboard Interconnect Kit (Daktronics part # 0A-1192-1702) is required. Refer to **DWG-1060613** for more information.

Modular Football Scoreboards

The table below lists the scoreboard sections that do not receive main power or signal:

Information Shown	Model #	Driver/ Power Supply Location	Power/Signal Connections	
			Digit Connections	Caption Connections
T.O.L. (HOME)	FB-2531, FB-2533, FB-2536, FB-2538, FB-2540, FB-2545, FB-2547, FB-2549	HOME Score	9-pin P1 to TOL digit; 4-pin to white TOL digit*	5-pin P50 to J50
T.O.L. (GUEST)	FB-2571, FB-2573, FB-2575, FB-2577, FB-2579, FB-2583, FB-2585, FB-2587	GUEST Score	9-pin P10 to TOL digit; 4-pin to white TOL digit*	5-pin P50 to J50
DOWN	FB-2618, FB-2628, FB-2658	TO GO	9-pin P3 to A1-J3; 2-pin P3 to PS1-J3** or PS2-J1***	5-pin P50 to J50; Mod 4-J2 (DOWN) to Mod 1-J1 (TO GO)
QTR (quarter)	FB-2621, FB-2631, FB-2661	BALL ON	9-pin P8 to A1-J8; 2-pin P8 to PS1-J3** or PS2-J1***	5-pin P50 to J50; Mod 1-J1 (QTR) to Mod 4-J2 (BALL ON)

*FB-2545 & FB-2583 only

**White 36" digits only

***48" digits only

T.O.L. sections may have up to 3 connections:

- Route the 9-pin plug from the scoring section and connect to the 9-pin jack on the T.O.L. digit.
- For white 36" digits only, route the 4-pin plug from the scoring section and connect to the mating 4-pin jack on the T.O.L. digit breakout board.
- If the T.O.L. section includes a backlit or electronic caption, route the 5-pin jack in the scoring section down into the T.O.L. section and connect to the mating 5-pin plug.

DOWN and QTR sections may have up to 4 connections:

- Route the 9-pin plug into the adjacent section and connect to the appropriate jack on the Primary Driver.
- For white 36" and all colors of 48" digits, route the 2-pin plug into the adjacent section and connect to the appropriate jack on the Power Supply.
- If the section includes a backlit or electronic caption, route the 5-pin plug into the adjacent section and connect to the mating 5-pin jack.
- If the section includes an electronic caption, a ribbon cable must be connected between the last module of DOWN and BALL ON electronic captions to the first module of TO GO and QTR electronic captions.

Refer to **Figure 30** for internal power/signal connection guidelines between a T.O.L. section and its mating HOME/GUEST section as well as DOWN/TO GO and BALL ON/QTR sections. Note that power supplies are only required for models with white 36" digits and all colors of 48" digits.

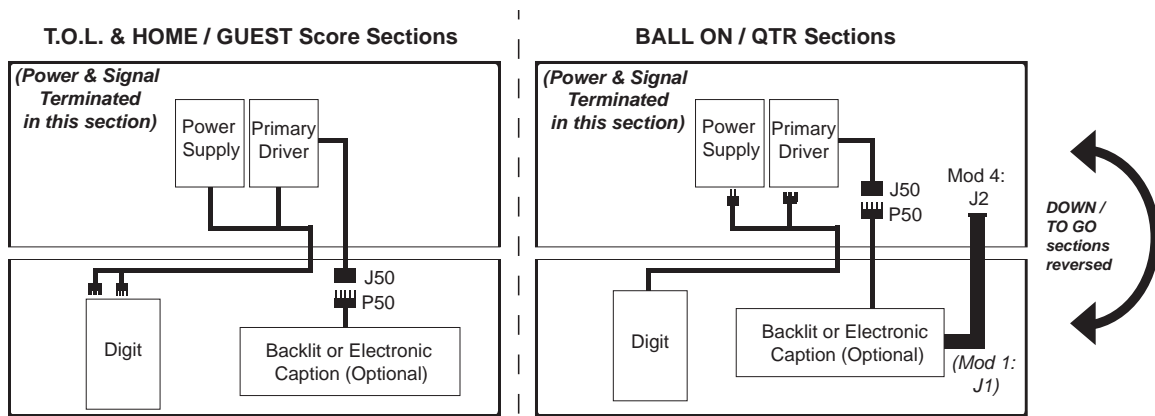


Figure 30: Modular Power/Signal Interconnections (Front View)

For sections that are too far apart to use internal interconnects, the signal may be re-driven, or "daisy-chained." Typically, the Game Clock section would receive primary signal from the control location, and signal cable could then branch out to the HOME and GUEST score sections. From there, signal can be re-driven once more to the DOWN/TO GO and BALL ON/QTR sections. Refer to **Figure 31** for an example of re-driving signal.

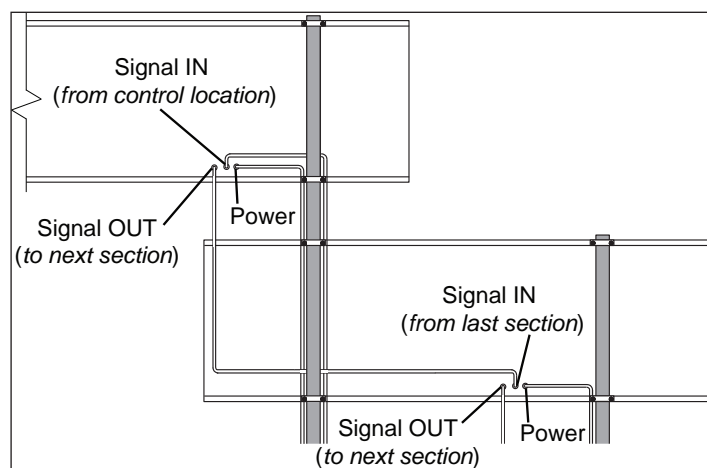


Figure 31: Re-driving Signal (Rear View)

Note: For radio-controlled systems, the radio receiver may be located in one section, while signal cable is routed to the other sections as needed.

Three-Section Tennis Models

The primary driver and power panel will be located in the top section. Refer to the component location drawings attached to the product specification sheets listed in **Appendix A** for exact driver locations.

Open access panels as needed to locate the coiled bundles of interconnect cable, then route and connect the cables as described below and shown in **Figure 32**.

1. Route the interconnect cable labeled **P50** coming from the A2 driver in the middle section up into the top section and connect it to the mating **J50** jack coming from the power panel.
2. Route one end of the other interconnect cable labeled **P51** from the middle section up into the top section and connect it to the mating **J51** jack coming from the power panel.
3. Route the other end of the interconnect cable labeled **J52** from the middle section down into the bottom section and connect to the mating **P52** plug coming from the A5 driver.

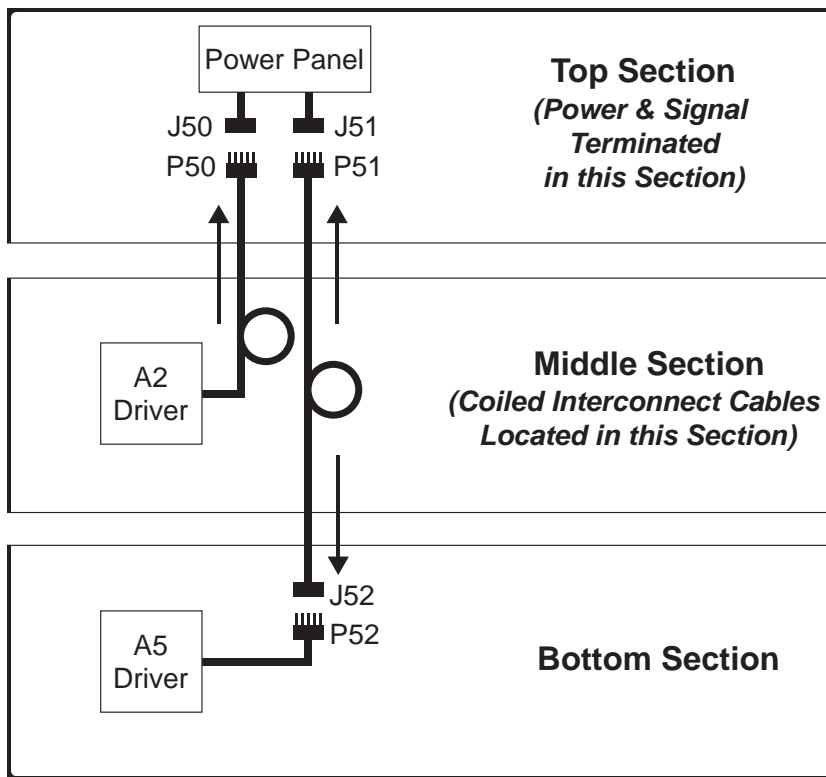


Figure 32: Power/Signal – TN-2650 & TN-2651

Four-Section Tennis Models

The primary driver and power panel will be located in the top section (Section A). Refer to the component location drawings attached to the product specification sheets listed in **Appendix A** for exact driver locations.

Open access panels as needed to locate the coiled bundles of interconnect cable, then route and connect the cables as described below and shown in **Figure 33**.

1. Route the interconnect cable labeled **P50** coming from the A3 driver in Section B up into Section A and connect it to the mating **J50** jack coming from the power panel.
2. Route one end of the interconnect cable labeled **P51** from Section B up into Section A and connect it to the mating **J51** jack coming from the power panel.
3. Route one end of the interconnect cable labeled **P52** from Section B up into Section A and connect it to the mating **J52** jack coming from the power panel.
4. Route the interconnect cable labeled **P51** coming from the A5 driver in Section C up into Section B and connect it to the interconnect cable labeled **J51**.
5. Route the interconnect cable labeled **P52** in Section C up into Section B and connect it to the interconnect cable labeled **J52**.
6. Route the interconnect cable labeled **P53** coming from the A7 driver in Section D up into Section C and connect it to the interconnect cable labeled **J53**.

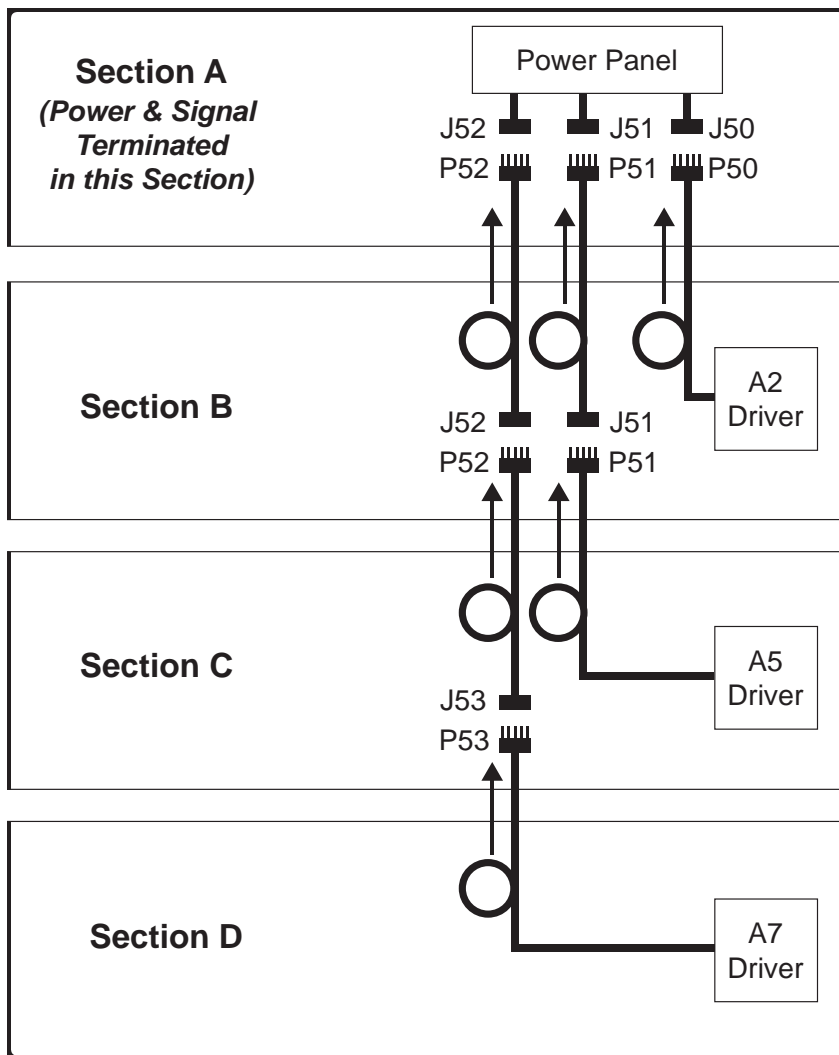


Figure 33: Power/Signal – TN-2652 & TN-2653

Pari-mutuel Displays

Each pari-mutuel display model requires power, while one display may receive signal and re-drive it to other displays (refer to **Figure 31** for an example of re-driving signal).

All pari-mutuel displays are composed of two sections. In order for power and signal to reach both sections, an interconnect cable from the primary driver in one section must be connected to the driver in the other section. The location of these drivers varies, but the connectors always include a 5-pin plug labeled **P50** and a mating jack labeled **J50**. Refer to the schematic drawings in the service manual for detailed driver interconnect diagrams.

Note: Since the PM-2101 has two sections but only one driver, it requires individual digit harnesses to be routed from the top section down into the bottom and connected to the appropriate jacks in the driver. Refer to the component location drawing (attached to product specification sheet listed in **Appendix A**) for the proper digit output numbers of the top digits.

4 Scoreboard Options

Time of Day Mode

Time of Day (TOD) mode allows the scoreboard to function as a clock when no All Sport signal is present.

Note: TOD mode is available on scoreboards with driver firmware version 1.0 or higher. Also, the scoreboard must have at least four clock digits.

To enable Time of Day mode:

1. **Shut off power to the scoreboard at the breaker.**
2. Access the scoreboard driver to which the clock digits are connected. Refer to the component location drawings attached to the product specification sheets listed in **Appendix A**.

3. At the bottom of the driver are two address switches labeled "H" and "L."

Record the position of both switches here as they will need to be returned to their exact positions later:

H	
L	

4. Use a small flathead screwdriver to move both H and L address switches to the "F" position (**Figure 34**). This will set the scoreboard driver to Diagnostics Mode.

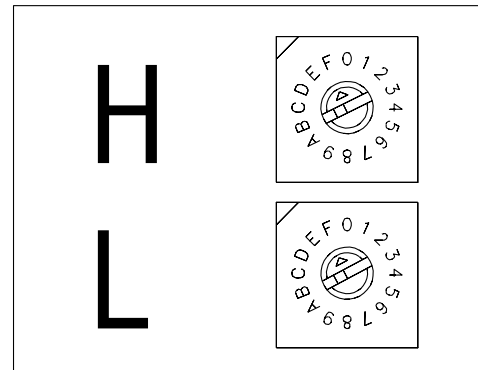


Figure 34: Address Switch Settings – Diagnostic Mode

5. Reapply power to the scoreboard. If the driver has successfully entered Diagnostics Mode, the "RUN" LED (DS2) will be blinking at a fast rate, about four times per second.

6. Rotate the L address switch to the "0" position (**Figure 35**). The "232" LED (DS1) will blink to show a change has been made:

- Three blinks = Time of Day Enabled
- Two blinks = Time of Day Disabled

7. To exit Diagnostics Mode, rotate the High address switch (H) to any value other than "F."

THIS STEP MUST BE PERFORMED TO SAVE THE TIME OF DAY SETTING!

8. Set both address switches back to their original positions as recorded in **Step 3**. Note that the "RUN" LED (DS2) will now be blinking slower, about once per second, and the scoreboard will finish the power-up sequence to operate as normal.

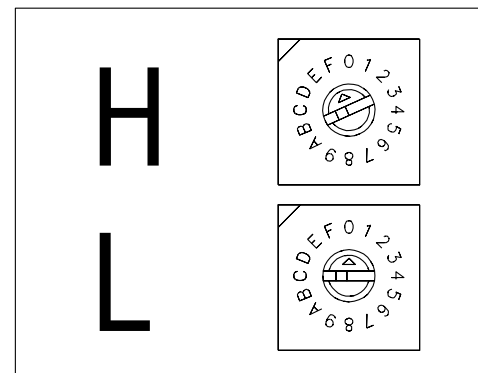


Figure 35: Address Switch Settings – Time Of Day Mode Enable

To adjust the Time of Day settings, refer to the All Sport control console operation manual.

Team Name Message Centers and Electronic Captions

Team Name Message Centers (TNMCs) are programmable LED displays that allow scoreboards to show custom Home and Guest names. Electronic captions, on the other hand, are pre-programmed to only show specific labels to match the captions for a particular sport mode, making it much simpler to switch between sports. TNMCs and electronic captions are typically factory-installed, but they can also be added later, after the scoreboard has been mounted. For more information about TNMCs or electronic captions, contact a Daktronics representative or refer to the service manual listed in **Troubleshooting (p.2)**.

Trumpet Horns

Trumpet horn options are available for installation only on scoreboards that have clocks. There are two types of optional trumpet horns:

- Internally mounted 120 V trumpet horn
- Externally mounted 12 VDC trumpet horn

A 120 V trumpet horn cannot be installed in a scoreboard running on 240 V power.

For more information about trumpet horns, contact a Daktronics representative or refer to the **Outdoor Scoreboard Horns Installation Manual (DD3088739)**, available online at www.daktronics.com/manuals.

Time Outs Left (T.O.L) Digits

Certain scoreboards have the option to add time outs left (T.O.L.) digits for both the home and guest teams. These digits are installed by simply unscrewing the blank face panel, connecting and securing the digit panel, and manually applying the "T.O.L." vinyl caption. The following scoreboard models in this manual have optional T.O.L. digits:

- 15" tall digits – FB-2018, FB-2019, FB-2020, SO-2018
- 18" tall digits – FB-2021, FB-2022, SO-2021, SO-2023

Changeable Caption Kits

Caption kits contain hardware for one caption only and consist of an upper caption retainer, a lower caption retainer, a changeable caption panel, and self-tapping screws.

The standard HOME and GUEST captions are applied directly to the face of the scoreboard. Team name captions are on changeable panels that fit into retainers mounted above and below the HOME and GUEST captions. If these retainers are not already present, attach the retainers included with the caption kit. Other caption kits are available to show different information for different sports.

To install a changeable panel, lift the panel all the way up into the upper retainer first, and then insert the bottom of the panel into the lower retainer. Reverse this procedure to remove the caption panel.

Protective Devices

Daktronics makes optional protective devices, including screens and netting, to help prevent damage to the display due to normal ball impacts.

Note: Some customers may choose to install devices to protect the display from projectiles. Protective devices not provided by Daktronics must be approved by Daktronics prior to installation. Failure to follow this approval procedure will void the warranty.

5 Daktronics Exchange and Repair & Return Programs

Exchange Program

The Daktronics Exchange Program is a service for quickly replacing key components in need of repair. If a component fails, Daktronics sends a replacement part to the customer who, in turn, returns the failed component to Daktronics. This decreases equipment downtime. Customers who follow the program guidelines explained below will receive this service.

Before contacting Daktronics, identify these important numbers:

Model Number: _____

Assembly Number: _____

Job/Contract Number: _____

Date Manufactured/Installed: _____

Daktronics Customer ID Number: _____

To participate in the Exchange Program, follow these steps:

1. Call Daktronics Customer Service.

United States & Canada: 1-800-DAK-TRON (325-8766)

Outside the U.S. & Canada: +1-605-275-1040

2. When the new exchange part is received, mail the old part to Daktronics.

If the replacement part fixes the problem, send in the problem part being replaced.

- a. Package the old part in the same shipping materials in which the replacement part arrived.
- b. Fill out and attach the enclosed UPS shipping document.
- c. Ship the part to Daktronics.

3. The defective or unused parts must be returned to Daktronics within 5 weeks of initial order shipment.

If any part is not returned within five (5) weeks, a non-refundable invoice will be presented to the customer for the costs of replenishing the exchange parts inventory with a new part. Daktronics reserves the right to refuse parts that have been damaged due to acts of nature or causes other than normal wear and tear.

Repair & Return Program

For items not subject to exchange, Daktronics offers a Repair & Return Program. To send a part for repair, follow these steps:

1. Call Daktronics Customer Service.

United States & Canada: 1-800-DAK-TRON (325-8766)

Outside the U.S. & Canada: +1-605-275-1040

2. Receive a case number before shipping.

This expedites repair of the part.

3. Package and pad the item carefully to prevent damage during shipment.

Electronic components, such as printed circuit boards, should be placed in an antistatic bag before boxing. Daktronics does not recommend using packing peanuts when shipping.

4. Enclose:

- name
- address
- phone number
- the case number
- a clear description of symptoms

5. Ship to:

Daktronics Customer Service

[Case #]

201 Daktronics Drive, Dock E

Brookings, SD 57006

Daktronics Warranty & Limitation of Liability

The Daktronics Warranty & Limitation of Liability is located at the end of this manual. The Warranty is independent of Extended Service agreements and is the authority in matters of service, repair, and operation.

This page intentionally left blank.

A Specifications

All of the product specification sheets for the displays in this manual are listed below. Product-specific installation and component location drawings are included with each spec sheet.

Note: Refer to **Figure 1** to determine a display's model number.

Viewing Product Specifications Online:

If a specification sheet is incorrect or missing, they are all available for download online.

- When viewing the digital version of this manual, simply click a link below to open it.
- When referencing the printed version of this manual, open an Internet browser and go to www.daktronics.com/Web%20Documents/HSPR-Documents/DD#####.pdf (replace "DD#####" with one of the Spec Sheet numbers shown below).

Single-Section Scoreboards

Model	Spec Sheet	Model	Spec Sheet	Model	Spec Sheet
ADPC-2023	DD3730253	BA-2518	DD1739303	MS-2032	DD4046839
ADPC-2031	DD3730274	BA-2618	DD1734727	MS-2126	DD3312907
ADPC-2033	DD3730287	BA-2715	DD1734734	MS-3918	DD1734766
ADPC-2034	DD3730298	BA-2718	DD1734740	RO-2010	DD1756861
ADTI-2003	DD4709955	CR-2002	DD1756601	RO-2011	DD1756894
ADTI-2019	DD4709957	CR-2003	DD2167525	RO-2019	DD3634134
ADTI-2032	DD4709958	FB-824	DD2167261	SO-918	DD2167442
BA-618	DD2118104	FB-4005	DD1734755	SO-2008	DD2167448
BA-624	DD2118116	FB-2030	DD2190567	SO-2013	DD2167468
BA-2005	DD2118134	FB-2036	DD4757173	SO-2918	DD1734747
BA-2010	DD2121807	FB-2037	DD4757185	TI-218	DD1757007
BA-2014	DD2118163	FB-2038	DD4757195	TI-2003	DD1757027
BA-2017	DD2118169	MS-915	DD1756705	TI-2010	DD1757109
BA-2019	DD2118182	MS-918	DD2167408	TI-2012	DD1757303
BA-2022	DD2118191	MS-2002	DD2167412	TI-2015	DD1757334
BA-2023	DD3023964	MS-2004	DD2167420	TI-2019	DD1757391
BA-2030	DD2467046	MS-2006	DD2240343	TI-2024	DD2191318
BA-2031	DD3023984	MS-2012	DD2167432	TI-2032	DD1893381
BA-2032	DD3193775	MS-2024	DD1745306	TI-2033	DD3017701
BA-2033	DD3504339	MS-2025	DD1745311	TI-2034	DD3632181
BA-2034	DD3504365	MS-2028	DD3645470	TI-2035	DD3632311
BA-2035	DD3504441	MS-2029	DD3645488		
BA-2515	DD1734711	MS-2030	DD4042205		

Multi-Section Scoreboards

Model	Spec Sheet	Model	Spec Sheet	Model	Spec Sheet
BA-1518	DD2118098	FB-2020	DD2167285	MS-2009	DD2167425
BA-2025	DD1969963	FB-2021	DD2167297	MS-2027	DD3245595
BA-2026	DD1972163	FB-2022	DD2167302	MS-2031	DD4042208
BA-2027	DD1972393	FB-2023	DD2167306	MS-2918	DD2167437
BA-2028	DD1972415	FB-2024	DD2167351	SO-2011	DD2167461
BA-2029	DD1972427	FB-2025	DD2167356	SO-2019	DD2167485
BA-2125	DD2594524	FB-2026	DD2167363	SO-2021	DD2167495
BA-2127	DD2594535	FB-2027	DD2167369	SO-2023	DD2167513
FB-2018	DD2167274	FB-2028	DD1972444	SO-2043	DD1956444
FB-2019	DD2167276	FB-3010	DD2196899		

Modular Football Scoreboards

Model	Spec Sheet
FB-2500 & FB-2600 Series	DD2216211

Hybrid Football Scoreboards

Model	Spec Sheet
FB-2700 Series	DD3646059

Tennis Scoreboards

Model	Spec Sheet	Model	Spec Sheet
TN-2603	DD2731384	TN-2651	DD2731389
TN-2604	DD2731386	TN-2652	DD2731390
TN-2605	DD2731387	TN-2653	DD2731391
TN-2606	DD1073328	TN-2654	DD2731393
TN-2607	DD1073391	TN-2655	DD2731394
TN-2609	DD3310657	TN-2656	DD2731397
TN-2650	DD2731388	TN-2657	DD2731399

Pari-Mutuel Displays

Model	Spec Sheet	Model	Spec Sheet
PM-2100	DD2910222	PM-2108	DD2910230
PM-2101	DD2910223	PM-2109	DD2910232
PM-2102	DD2910224	PM-2110	DD2910233
PM-2103	DD2910225	PM-2111	DD2910235
PM-2104	DD2910226	PM-2112	DD2910236
PM-2105	DD2910227	PM-2113	DD2910238
PM-2106	DD2910228	PM-2114	DD2910239
PM-2107	DD2910229		


B Reference Drawings

Refer to **Resources (p.1)** for information regarding how to read the drawing number. Any contract-specific drawings take precedence over these general drawings.

Reference Drawings:

Ad Panel Mounting	DWG-52187
P1647; Pole Mounting Options	DWG-1048184
P1647 MTG Tube Assembly Detail.....	DWG-1048268
P1647; I-beam Clamp Mounting.....	DWG-1052565
Installation Drawing; Split 2 Sec Scoreboard.....	DWG-1060613
P1647; DSA I-Beam Clamp Mounting.....	DWG-1064893
Ad Panel DSA I-beam Clamp Mounting.....	DWG-1064894
Mtg Straps, 4 Sec SCBD on 3 Poles	DWG-1115341
I-Beam Clamp Mounting, Sheet Metal Attachment.....	DWG-1129110
Scoreboard Mounting.....	DWG-1130246
LVX Ad Panel I-beam Clamp Mounting	DWG-3918326
P1647; LVX I-Beam Clamp Mounting.....	DWG-3918361

This page intentionally left blank.

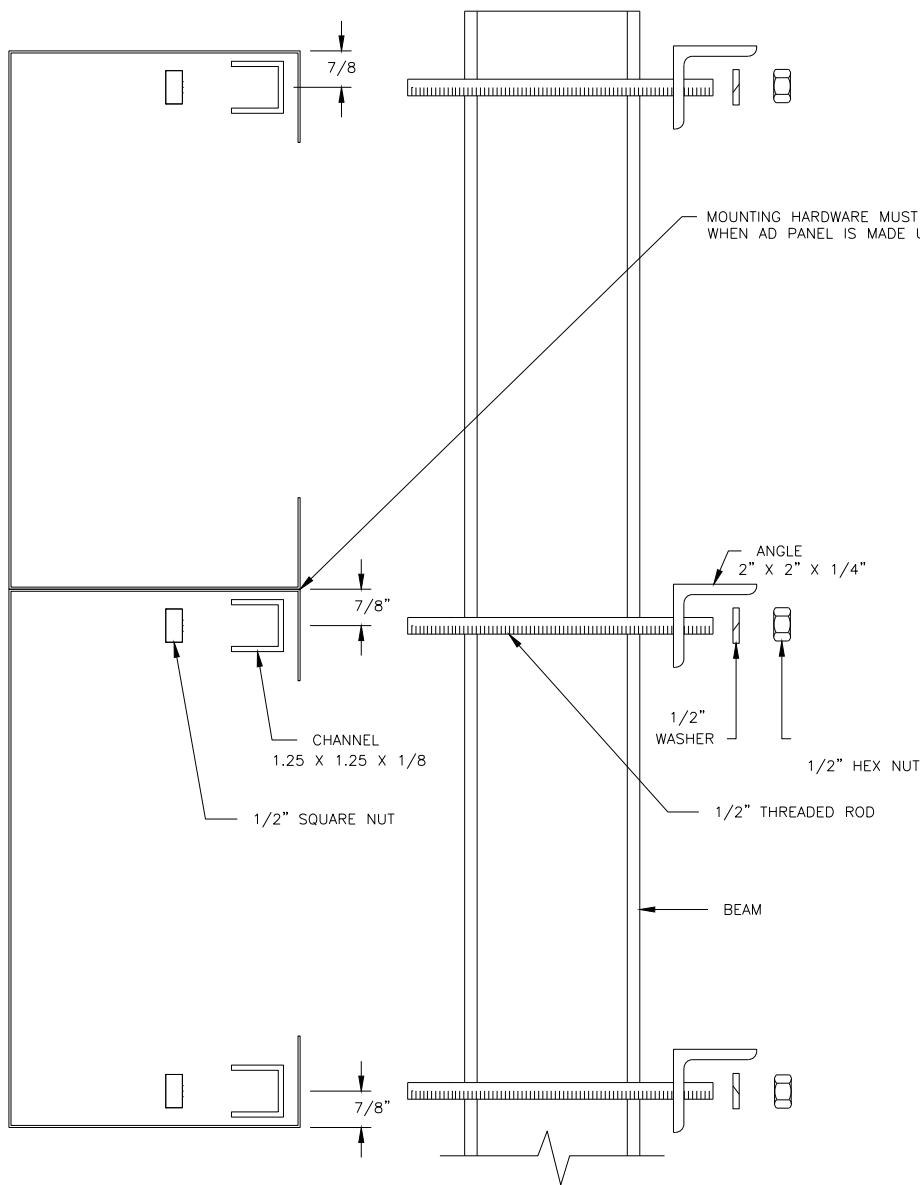

MOUNTING INSTRUCTIONS:




1. USE THE MOUNTING CHANNEL TO DETERMINE WHICH HOLE COMBINATION SHOULD BE USED. BE SURE TO KEEP THE BOLTS AS CLOSE TO THE BEAM AS POSSIBLE.
2. USING THE MOUNTING CHANNEL AS A TEMPLATE, DRILL 9/16" HOLES IN THE UPPER AND LOWER REAR FLANGE OF AD PANEL WHERE THE SUPPORTS WILL GO.
3. PLACE SQUARE NUTS INSIDE CHANNEL AND THREAD BOLTS THROUGH.
4. LIFT AD PANEL INTO POSITION WITH BOLTS STILL IN PLACE.
5. PLACE MOUNTING ANGLES OVER EACH PAIR OF BOLTS AND SECURE WITH LOCK WASHERS AND HEX NUTS.
6. WHEN PANEL IS ADJUSTED TO FINAL DESIRED POSITION, TIGHTEN HEX NUTS FIRMLY.

MOUNTING INSTRUCTIONS: FOR AD PANELS WITH BACKSHEETS.

1. USE THE MOUNTING CHANNEL TO DETERMINE WHICH HOLE COMBINATION SHOULD BE USED. BE SURE TO KEEP THE BOLTS AS CLOSE TO THE BEAM AS POSSIBLE.
2. USING THE MOUNTING CHANNEL AS A TEMPLATE, DRILL 9/16" HOLES IN THE UPPER AND LOWER REAR FLANGE OF AD PANEL WHERE THE SUPPORTS WILL GO.
3. REMOVE BACKSHEETS IN AREAS ABOVE AND BELOW HOLES DRILLED IN STEP 2.
4. PLACE SQUARE NUTS INSIDE CHANNEL AND THREAD BOLTS THROUGH.
5. REPLACE BACKSHEETS REMOVED IN STEP 3.
6. LIFT AD PANEL INTO POSITION WITH BOLTS STILL IN PLACE.
7. PLACE MOUNTING ANGLES OVER EACH PAIR OF BOLTS AND SECURE WITH LOCK WASHERS AND HEX NUTS.
8. WHEN PANEL IS ADJUSTED TO FINAL DESIRED POSITION, TIGHTEN HEX NUTS FIRMLY.

REV 05	DATE: 13 JAN 20	PER CN-95848, REMOVED 1" SQUARE TUBE OPTION	BY: CDO
REV 04	DATE: 26 OCT 11	ADDED NOTE FOR USING MOUNTING HARDWARE AT AD PANELS SPLICES	BY: MBC
REV 03	DATE: 12 APR 10	ADDED 1" TUBE SPACER	BY: KDD
REV 02	DATE: 13 AUG 97	INCLUDED INSTRUCTIONS FOR AD PANELS WITH BACKSHEETS	BY: JAA
REV 01	DATE: 26 MAY 93	ADDED DESCRIPTION TEXT TO PARTS.	BY: MGG

		<small>THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2020 DAKTRONICS, INC. (USA)</small>		
		PROJECT: OUTDOOR INCANDESCENT SCOREBOARDS		
TITLE: AD PANEL MOUNTING				
DATE: 09 JUL 92	DM UNITS: INCHES [MILLIMETERS]	SHEET	REV	
SCALE: NONE	DO NOT SCALE DRAWING			05
DESIGN: MGUNDERSON	JOB NO. P1091	FUNC - TYPE - SIZE: R-10-B	52187	

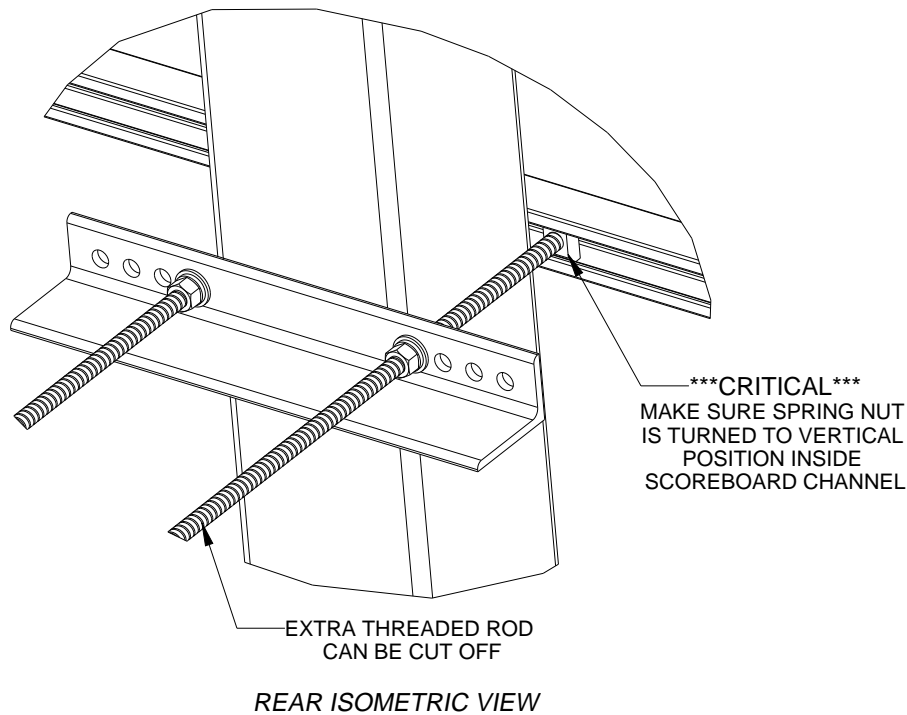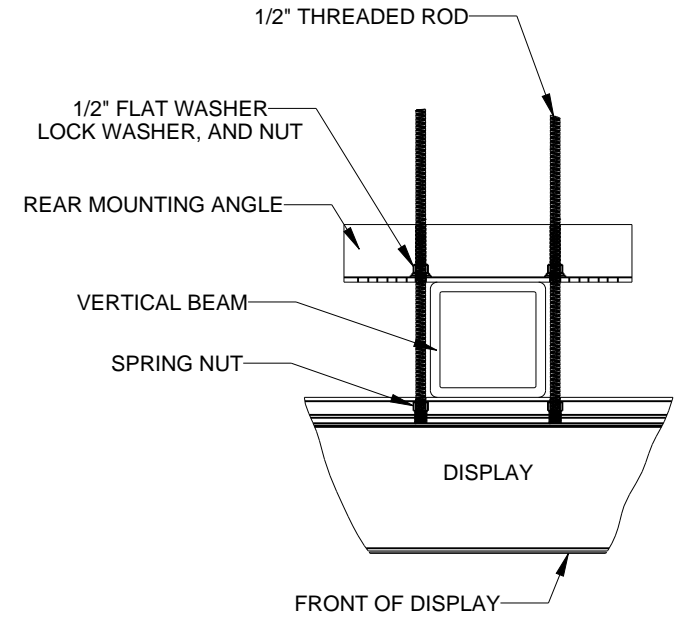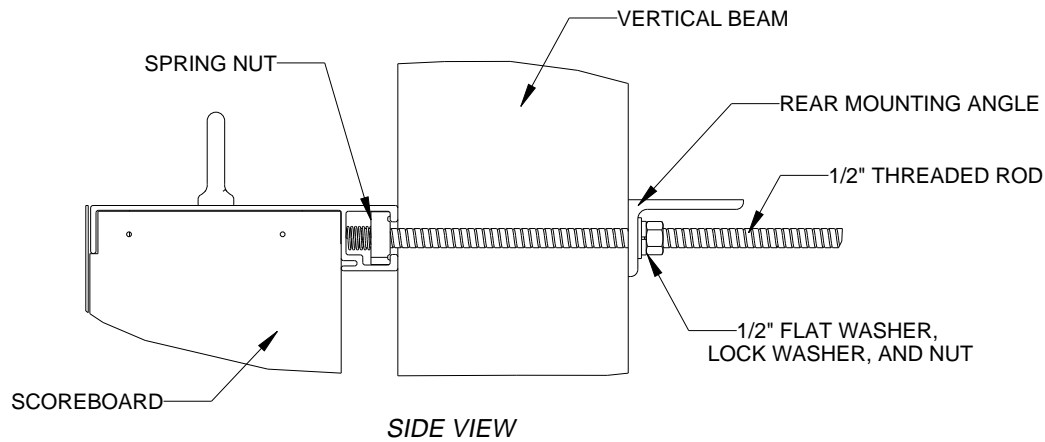

TOP VIEW
SCALE 1/10

*****CRITICAL*****
DO NOT USE ANY LUBRICANT
ON ANY MOUNTING HARDWARE
OR WARRANTY WILL BE VOIDED


STRUCTURAL NOTES:
- BOLT TORQUE: 30 FT-LB

NOTES:
- THREADED RODS RUN ALONG BOTH SIDES OF BEAM
- RODS DO NOT PASS THROUGH THE FLANGES OF THE BEAM
- NO DRILLING NECESSARY
- MAKE SURE SPRING NUT IS PERPENDICULAR TO CHANNEL
OPENING ON SCOREBOARD


04	22 DEC 15	PER EC-22871; ADDED LUBRICANT WARNING	PJS 18704
03	03 JULY 13	ADDED STRUCTURAL NOTE	TTF
02	20 SEP 12	PER EC-7114; REMOVED CHAMFER FROM 0M-133259	LMG
01	06 OCT 11	REPLACED VERTICAL I-BEAM WITH 6" X 6" SQUARE TUBE	JAVA
REV	DATE:		BY:



THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2016 DAKTRONICS, INC. (USA)



PROJECT: OUTDOOR SCOREBOARDS			
TITLE: P1647; POLE MOUNTING OPTIONS			
DATE: 22-DEC-15	DIM UNITS: INCHES [MILLIMETERS]	SHEET	REV
SCALE: 1/5	DO NOT SCALE DRAWING	1 OF 1	04
DESIGN: DOPPELT	JOB NO. P1647	FUNC - TYPE - SIZE E - 10 - A	1048184
DRAWN: DOPPELT			



REAR VIEW
EXTRUSION W/SPRING NUT
MAKE SURE NUT IS AT ANGLE
TO EXTRUSION


SEE DETAIL A

MUST USE HC-1095
(SMALLER FLAT WASHER)


MUST USE
HC-1575 (LARGER
FLAT WASHER)
ON CLIP ANGLES

NOT HERE ON
1 SECTION TALL
TUBES


POSSIBLE PICK
LOCATION IN FIELD,
ORIENTATE TO TOP
OF DISPLAY

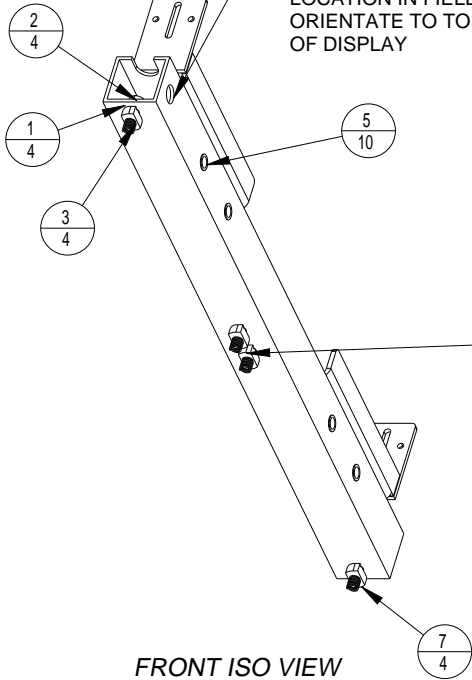


FRONT ISO VIEW

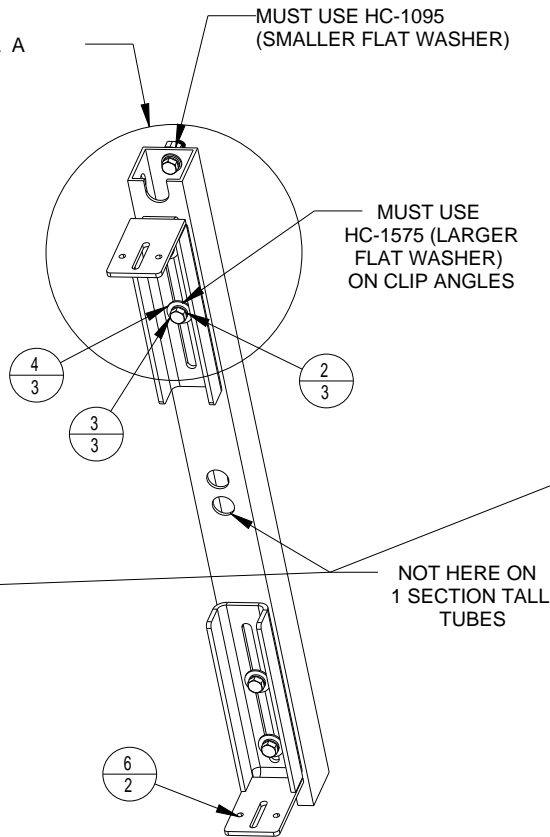

REAR ISO VIEW

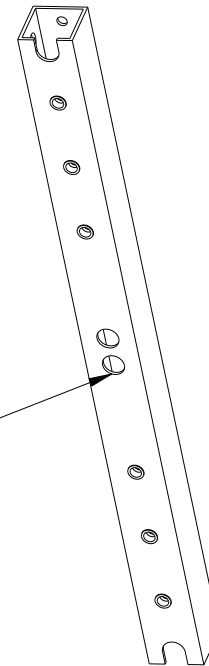

REAR ISO VIEW
CHANNEL AND NUTSERTS

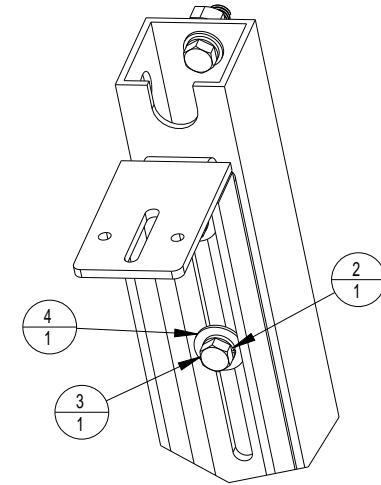

DETAIL A
SCALE 1/5

INDEX	NAME	QTY	DESCRIPTION
1	HC-1095	4	WASHER; 1/2 FLAT, ZN PLTD, SAE
2	HC-1101	8	WASHER; 1/2 SPLIT LOCK, ZN PLTD, MEDIUM
3	HC-1152	8	Bolt; 1/2-13x1 1/2 Hex Head, Plated, Grade 5 Fully Threaded
4	HC-1575	4	WASHER; 1/2" USS FLAT ZINC PLATED
5	HS-1459	10	NUT INSERT; 1/2 - 13 OPEN END
6	HS-2098	2	CLIP ANGLE; DVX PLATFORM, 139.7MM X 279.4MM
7	HS-2194	4	SPRING NUT; 1/2"-13 THREAD; ZINC PLATED

NOTES:


INSERT HS-1459 NUTSERTS @10 INTO TUBE
ATTACH HARDWARE AS SHOWN

MIDDLE CONNECTIONS INTO SCOREBOARDS
ONLY USED ON 2 SECTION TALL SCOREBOARDS

02	8 APR 16	PER EC-18150, ADDED DETAIL A	MTR
01	28 OCT 11	ADDED NOTES	DRO
REV	DATE:		BY:




THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING
ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY
ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF
DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES.
COPYRIGHT 2016 DAKTRONICS, INC. (USA)





PROJECT: OUTDOOR SCOREBOARDS			
TITLE: P1647 MTG TUBE ASSEMBLY DETAIL			
DATE: 08-APR-16	DIM UNITS: INCHES [MILLIMETERS]	SHEET	REV
SCALE: 1/10	DO NOT SCALE DRAWING	1 OF 1	02
DESIGN: DOPPELT	JOB NO. P1647	FUNC - TYPE - SIZE	1048268
DRAWN: DOPPELT		E - 07 - A	


VERTICAL BEAM - FLANGE THICKNESS MUST BE 1/4" - 3/4"
 1/2-13 X 3.000 BOLT - BOLT THREAD MUST ENGAGE ENTIRE DEPTH OF SPRING NUT. BOLT MUST BE TIGHTENED TO 40FT-LB TORQUE
 1/2" LOCK WASHER
 1/2" FLAT WASHER
 I-BEAM CLAMP - ASSURE CLAMP IS TIGHTLY ENGAGED TO I-BEAM AND NUT

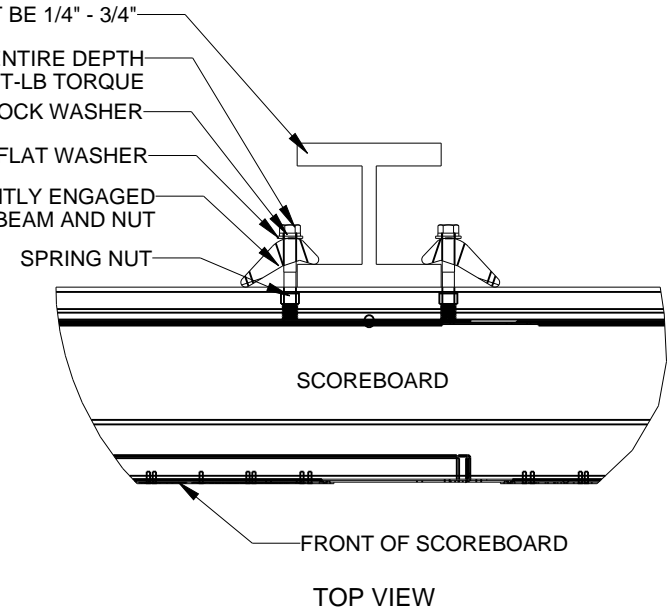

*****CRITICAL*****
 DO NOT USE ANY LUBRICANT ON ANY MOUNTING HARDWARE OR WARRANTY WILL BE VOIDED

05	22 DEC 15	PER EC-22871; ADDED LUBRICANT NOTE	PJS 18704
04	06 JAN 14	ADDED ALLOWABLE TENSION AND SHEAR CAPACITY DETAILS	JAVA
03	23 OCT 13	PER EC-12382; CHANGED BOLT TORQUE FROM 30 FT-LB TO 40 FT-LB	NJM
02	07 MAR 12	ADDED STANDARD MOUNTING METHODS NOTES	KDD
01	21 FEB 12	CHANGED ROCKER TO I-BEAM	KDD
REV	DATE:		BY:

		THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2016 DAKTRONICS, INC. (USA)			
PROJECT: OUTDOOR SCOREBOARD					
TITLE: P1647; I-BEAM CLAMP MOUNTING					
DATE: 22-DEC-15		DIM UNITS: INCHES [MILLIMETERS]		SHEET REV	
SCALE: 1/8		DO NOT SCALE DRAWING		1 OF 1 05	
DESIGN: MCARSRU		JOB NO.		FUNC - TYPE - SIZE	
DRAWN: MCARSRU		P1647		E - 07 - A	
1052565					

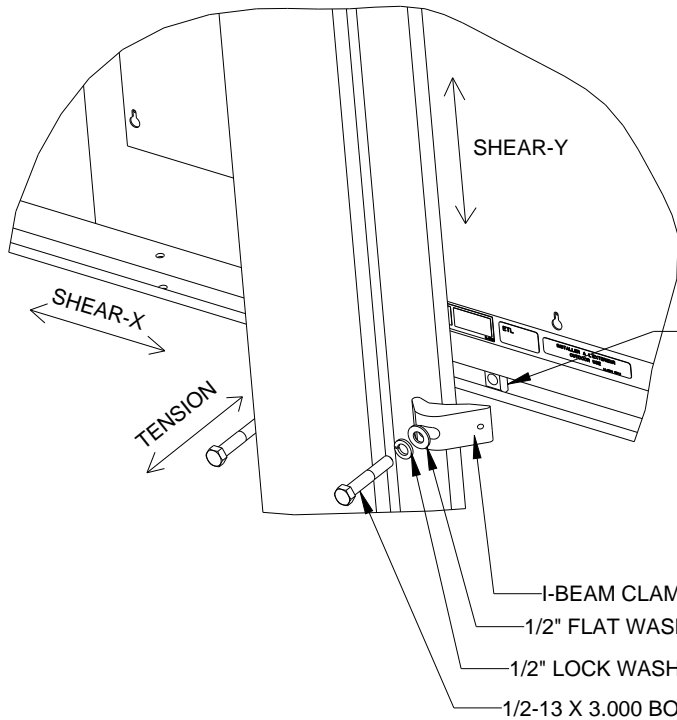

SPRING NUT
*****CRITICAL*****
 MAKE SURE SPRING NUT IS TURNED TO VERTICAL POSITION INSIDE SCOREBOARD CHANNEL

EXPLODED REAR ISOMETRIC VIEW

STANDARD MOUNTING METHOD

MOUNTING INSTRUCTIONS:

1. PLACE SPRING NUTS INTO SCOREBOARD CHANNEL IN APPROXIMATE LOCATION OF VERTICAL BEAMS
2. LIFT SCOREBOARD INTO POSITION
3. MAKE SURE THE 1/2-13 BOLTS ARE AS CLOSE TO THE I-BEAM FLANGES AS POSSIBLE
4. WHEN SCOREBOARD IS ADJUSTED TO FINAL DESIRED POSITION, TIGHTEN BOLTS FIRMLY
5. IF FLANGE THICKNESS IS MORE THAN 3/4" THICK LONGER BOLTS WILL BE REQUIRED AT THE CUSTOMER'S EXPENSE.

STRUCTURAL NOTES


ALLOWABLE CAPACITY PER EACH CLAMP:
 SHEAR = 160 LBS
 TENSION = 2300 LBS

SHEAR AND TENSION LOAD DIRECTION ARE AS INDICATED ON REAR ISOMETRIC VIEW

INSTRUCTIONS


- MAKE SURE INTERCONNECT CABLES FROM BOTH BOTTOM AND TOP SECTION ARE NOT EXPOSED.
- INSTALL 2 INCH CONDUIT FROM START LOCATION TO END LOCATION.
- FEED NEW 36FT PWR/SIG HARNESS FROM START LOCATION OF NEW CONDUIT TO END LOCATION. NOTE THAT FEMALE JACK END (J43) MUST STAY AT TOP.
- CONNECT FEMALE END TO DRIVER A1 AT P43. DRIVER ACCESS BEHIND HOME SCORE DIGIT.
- CONNECT MALE END AT CONDUIT END LOCATION TO DRIVER AT J43 END. DRIVER ACCESS BEHIND DOWN DIGIT.
- SEAL ANY OPEN AND UNUSED INTERCONNECT HOLES IF THEY EXIST.
- TEST BOARD WITH NORMAL OPERATION.

ID PANEL (OPTIONAL)

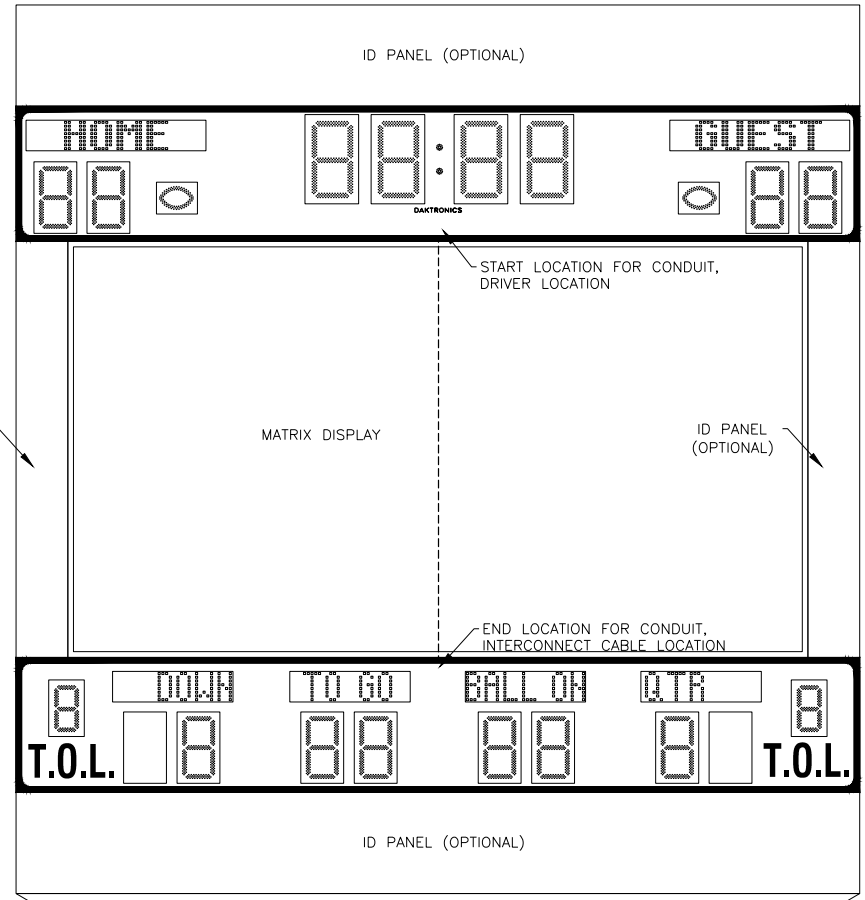


DAKTRONICS, INC. BROOKINGS, SD 57006 DO NOT SCALE DRAWING		THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2011 DAKTRONICS, INC.	
PROJ: TITLE: INSTALLATION DRAWING; SPLIT 2 SEC SCOREBOARD DESIGN: KBIERBA DRAWN: KBIERBA DATE: 06 JUL 11			
SCALE: NONE		SHEET: REV: JOB NO: FUNC-TYPE-SIZE:	
01 15 FEB 12 MADE DWG MORE GENERIC FOR OTHER ORDERS		02 P1192 F-01-B 1060613	

REV 02	DATE: 15 FEB 12	CHG TITLE	BY: KZB
REV 01	DATE: 15 FEB 12	MADE DWG MORE GENERIC FOR OTHER ORDERS	BY: KZB

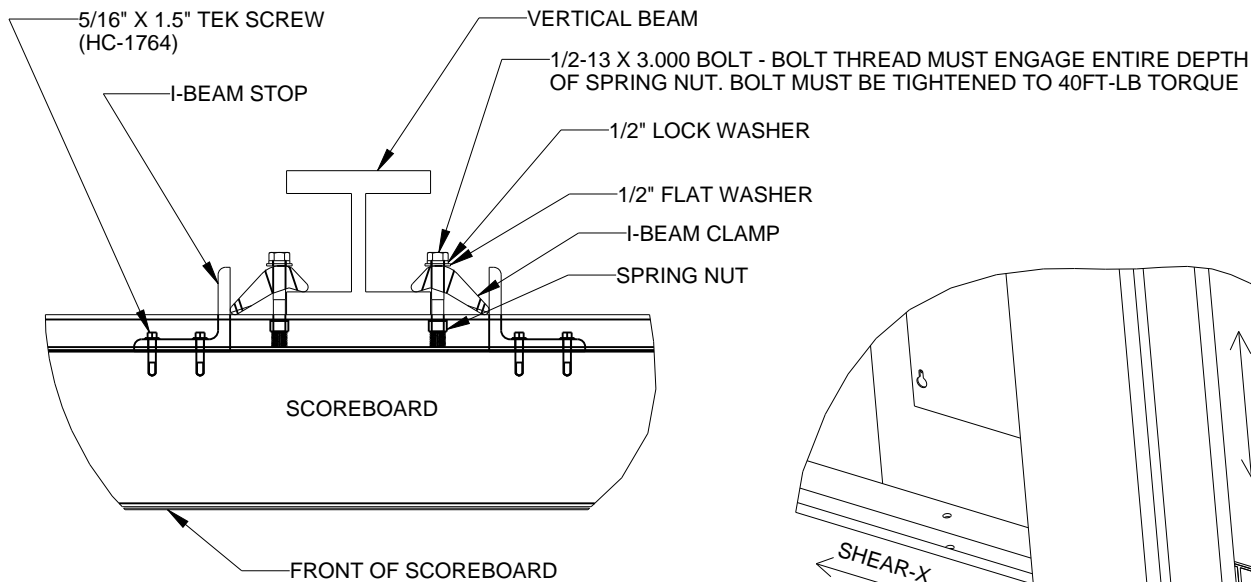

TOP VIEW

*****CRITICAL*****
DO NOT USE ANY LUBRICANT
ON ANY MOUNTING HARDWARE
OR WARRANTY WILL BE VOIDED

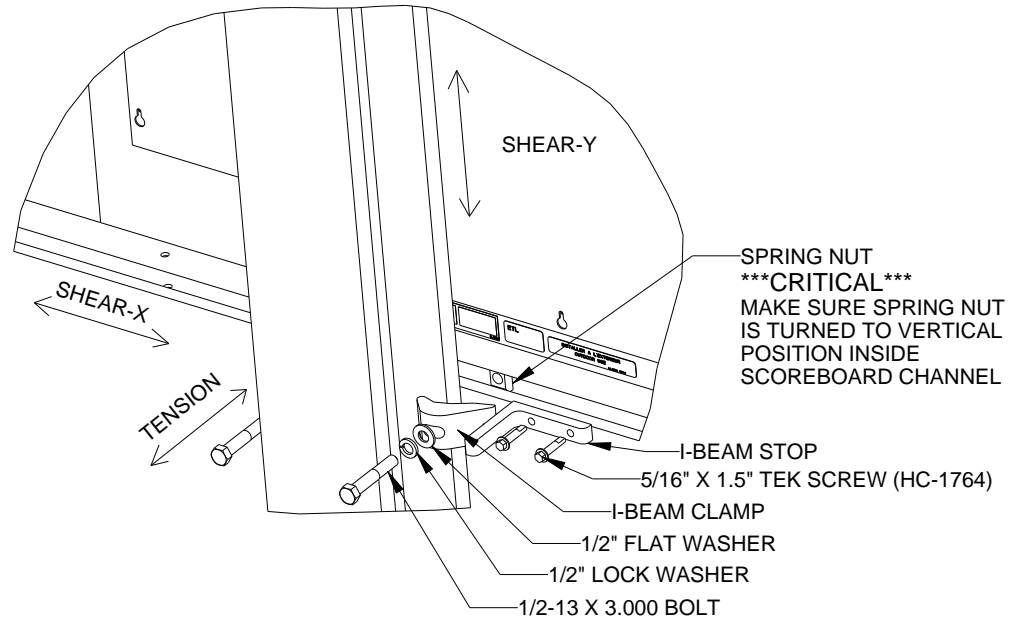

EXPLODED REAR ISOMETRIC VIEW

STANDARD MOUNTING METHOD

MOUNTING INSTRUCTIONS:

1. PLACE SPRING NUTS INTO SCOREBOARD CHANNEL IN APPROXIMATE LOCATION OF VERTICAL BEAMS
2. LIFT SCOREBOARD INTO POSITION
3. MAKE SURE THE 1/2-13 BOLTS ARE AS CLOSE TO THE I-BEAM FLANGES AS POSSIBLE
4. WHEN SCOREBOARD IS ADJUSTED TO FINAL DESIRED POSITION, TIGHTEN BOLTS FIRMLY
5. ATTACH I-BEAM STOPS TIGHT AGAINST I-BEAM CLAMPS USING 5/16" X 1.5" TEK SCREWS


ALLOWABLE CAPACITY PER EACH CLAMP:
SHEAR = 160 LBS
TENSION = 2300 LBS

SHEAR AND TENSION LOAD
DIRECTION ARE AS INDICATED ON
REAR ISOMETRIC VIEW


03	22 DEC 15	PER EC-22871; ADDED LUBRICANT NOTE	PJS 18704
02	06 JAN 14	ADDED SPECIFIC BOLT TORQUE FOR CLAMPS ADDED ALLOWABLE TENSION AND SHEAR CAPACITY DETAILS	JAVA
01	23 FEB 12	CHANGED ROCKERS TO I-BEAM	KDD
REV	DATE:		BY:




THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING
ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY
ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF
DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES.
COPYRIGHT 2016 DAKTRONICS, INC. (USA)



PROJECT: OUTDOOR SCOREBOARD			
TITLE: P1647; DSA I-BEAM CLAMP MOUNTING			
DATE: 22-DEC-15	DIM UNITS: INCHES [MILLIMETERS]	SHEET	REV
SCALE: 1/8	DO NOT SCALE DRAWING		1 OF 1 03
DESIGN: ZRYKHUS	JOB NO.	FUNC - TYPE - SIZE	1064893
DRAWN: ZRYKHUS	P1647	E - 07 - A	

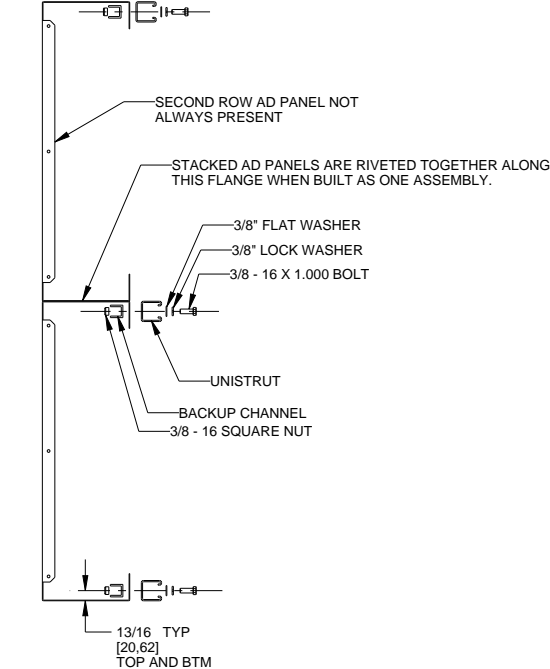

EXPLODED SIDE VIEW UNISTRUT ATTACHMENT

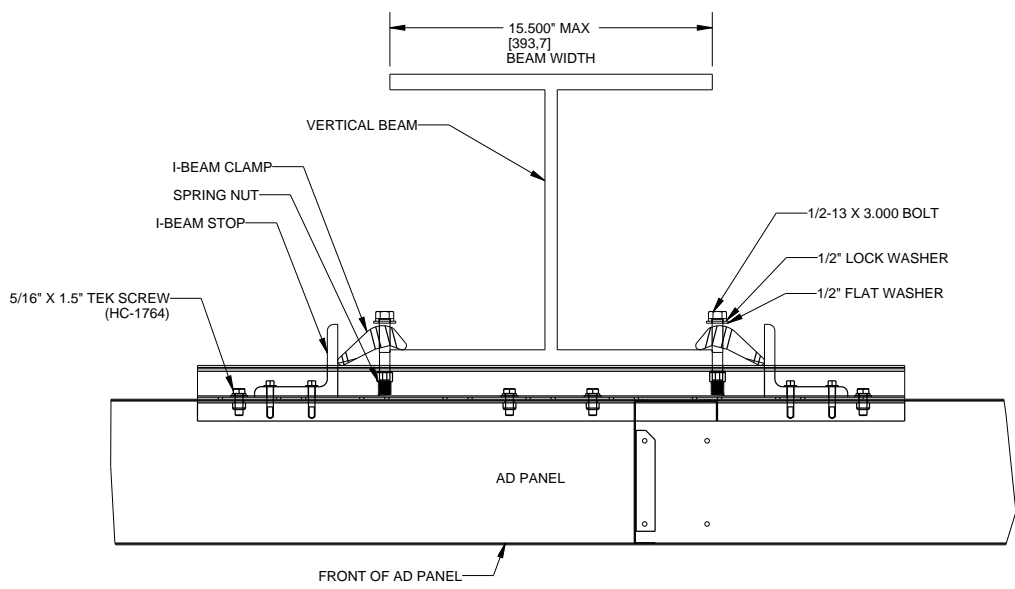

TOP VIEW AD PANEL ATTACHMENT SCALE 1/6

STRUCTURAL NOTES:


ALLOWABLE LOADS PER COLUMN CONNECTION

MAX ALLOWABLE WIND LOAD: 2,400 LBS
 MAX ALLOWABLE PANEL WEIGHT: 158 LBS
 COEFFICIENT OF FRICTION: 0.03
 BOLT TORQUE: 50 FT-LB
 MIN-MAX I-BEAM FLANGE THICKNESS: 0.25"-0.75"

*****CRITICAL*****
 DO NOT USE ANY LUBRICANT ON ANY MOUNTING HARDWARE OR WARRANTY WILL BE VOIDED


MOUNTING INSTRUCTIONS:

1. USING THE BACKUP CHANNEL AS A TEMPLATE, DRILL Ø7/16" HOLES IN THE UPPER AND LOWER REAR FLANGE OF THE AD PANEL WHERE THE VERTICAL BEAMS WILL BE LOCATED.
2. IF AD PANEL HAS BACKSHEETS, REMOVE BACKSHEETS NECESSARY AT THIS TIME TO ACCESS HARDWARE FOR UNISTRUT ATTACHMENT
3. ATTACH UNISTRUT TO AD PANEL THROUGH HOLES DRILLED IN STEP 1 AS SHOWN IN UNISTRUT ATTACHMENT SIDE VIEW
4. REPLACE BACKSHEETS REMOVED IN STEP 2
5. PLACE SPRING NUTS INTO UNISTRUT IN APPROXIMATE LOCATION OF VERTICAL BEAMS
7. LIFT AD PANEL INTO POSITION
8. ATTACH I-BEAM CLAMPS WITH 1/2" HARDWARE AS SHOWN IN TOP AND REAR ISOMETRIC VIEW AD PANEL ATTACHMENT
9. MAKE SURE THE 1/2-13 BOLTS ARE AS CLOSE TO THE I-BEAM FLANGES AS POSSIBLE
10. WHEN AD PANEL IS ADJUSTED TO FINAL DESIRED POSITION, TIGHTEN BOLTS FIRMLY
11. FASTEN I-BEAM STOPS TIGHT AGAINST I-BEAM CLAMPS WITH 5/16" X 1.5" TEK SCREWS

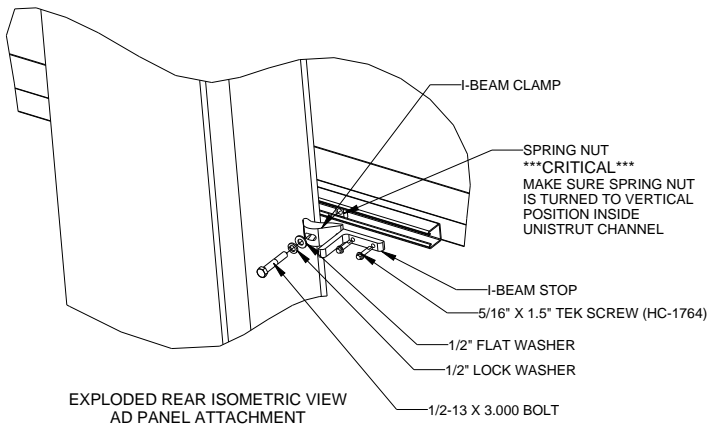

EXPLODED REAR ISOMETRIC VIEW AD PANEL ATTACHMENT

03	22 DEC 15	PER EC-22871: ADDED LUBRICANT WARNING	PJS 18704	<p>THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2016 DAKTRONICS, INC. (USA)</p> <p>THIRD ANGLE PROJECTION</p>
02	18 APR 12	INCREASED BEAM SIZE TO THE 15" MAX ADDED STACKED AD PANEL INSTRUCTIONS ADDED STRUCTURAL NOTES	JLR	
01	23 FEB 12	CHANGED ROCKER CLAMP/STOP TO I-BEAM CLAMP/STOP	KDD	
REV	DATE:		BY:	
<p>PROJECT: OUTDOOR SCOREBOARDS</p> <p>TITLE: AD PANEL DSA I-BEAM CLAMP MOUNTING</p> <p>DATE: 22-DEC-15 DIM UNITS: INCHES [MILLIMETERS] SHEET 1 OF 1 REV 03</p> <p>SCALE: 1/10 DO NOT SCALE DRAWING</p> <p>DESIGN: ZRYKHUS JOB NO. P1647 FUNC. TYPE - SIZE E - 07 - B</p> <p>DRAWN: ZRYKHUS Last Modified By - pechro 1064894 Last Modified - 2016-10-27</p>				

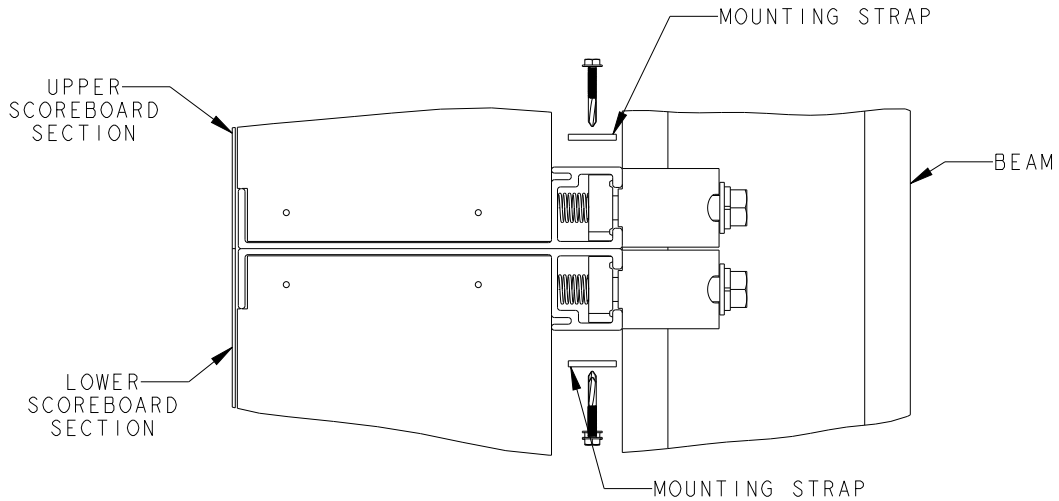

**SIDE VIEW
SCALE 1/4**

STRAP INSTALLATION PROCEDURE FOR 3 POLE APPLICATION

AFTER CLAMPING ALL FOUR SECTIONS OF THE SCOREBOARD TO MOUNTING BEAMS, IT IS NECESSARY TO ATTACH THE TWO BOTTOM SECTIONS TO EACH OTHER AND THE TWO TOP SECTIONS TO EACH OTHER.


STRAPS ARE REQUIRED AT SPLICE LOCATION FOR BOTH POLE MOUNTING AND I-BEAM MOUNTING STYLES

THIS IS ACHIEVED USING FOUR MOUNTING STRAPS (1/8" X 1" X 20" LONG) AND #12 HEX HEADED SCREWS.


POSITION THE MOUNTING STRAPS AS SHOWN ON THIS DRAWING. ATTACH FOUR SCREWS TO ATTACH EACH STRAP. 2 SCREWS ON EACH SIDE OF THE SPLICE.

ATTACH ONE STRAP TO THE TOP & BOTTOM OF EACH LEFT & RIGHT SECTION.


FAILURE TO ATTACH THE MOUNTING STRAPS TO THESE DISPLAY SECTIONS VOIDS ALL WARRANTY

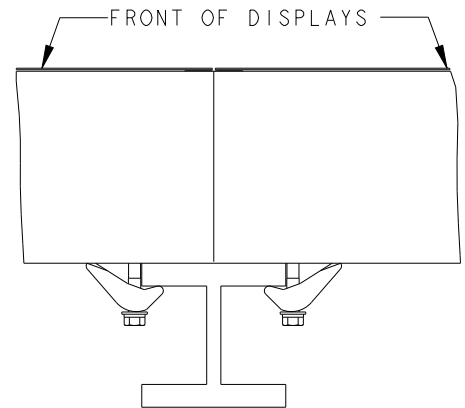

**TOP VIEW
SCALE 1/8**

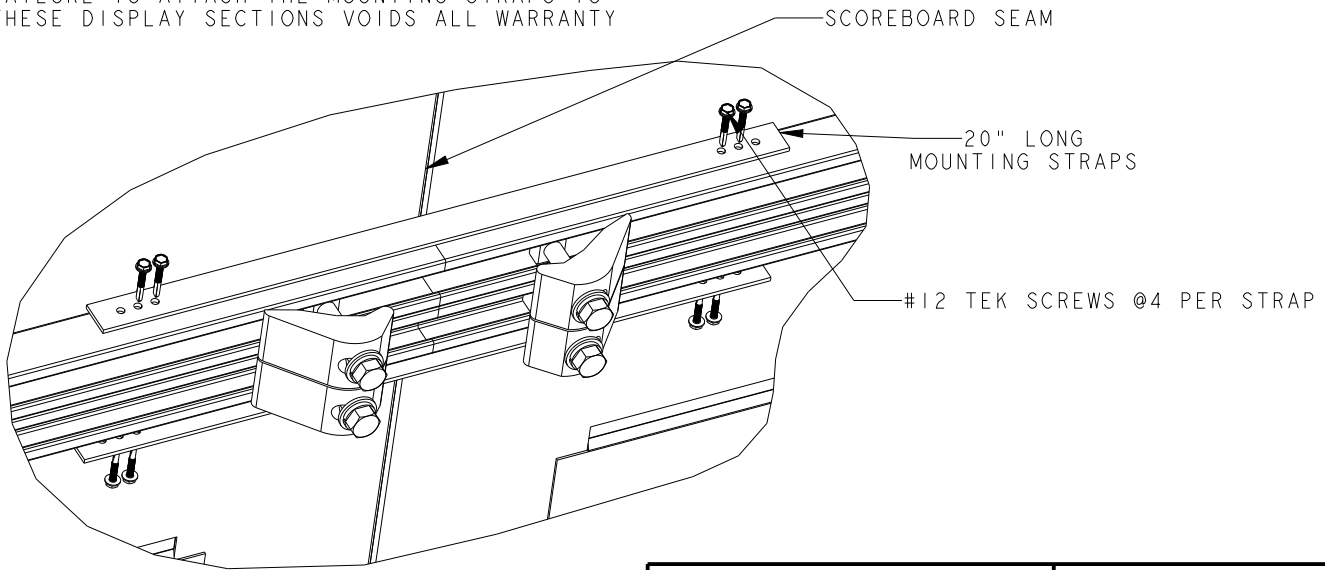


**ISOMETRIC VIEW
SCALE 1/5
SHOWN WITH OUT I-BEAM**



 DAKTRONICS, INC. BROOKINGS, SD 57006 DO NOT SCALE DRAWING		THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2011 DAKTRONICS, INC.	
		PROJ: OUTDOOR SCOREBOARDS TITLE: MTG STRAPS, 4 SEC SCBD ON 3 POLES	
DESIGN: USER NAME		DRAWN: DOPPELT	
SCALE: AS SHOWN		DATE: 05-OCT-12	
SHEET: 1 OF 1	REV: 00	JOB NO: P 1647	FUNC-TYPE-SIZE: E-07-A
			1115341

REV	DATE:	BY:
-----	-------	-----

STANDARD SHEETMETAL SCOREBOARD/BACKLIT AD PANEL MOUNTING METHOD

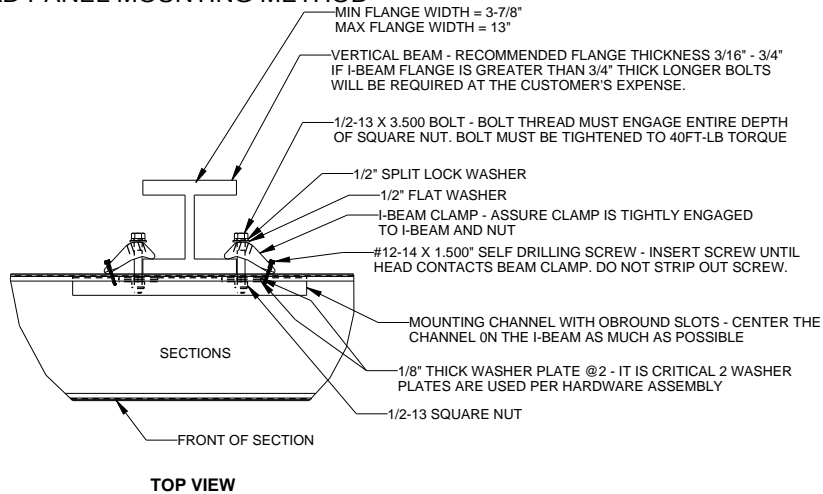

STANDARD NON-BACKLIT AD PANEL MOUNTING METHOD

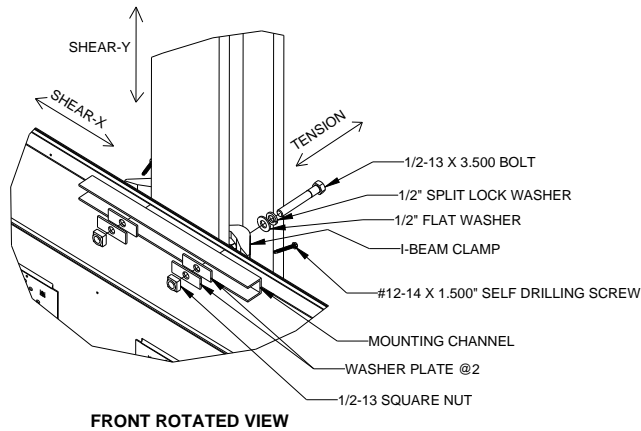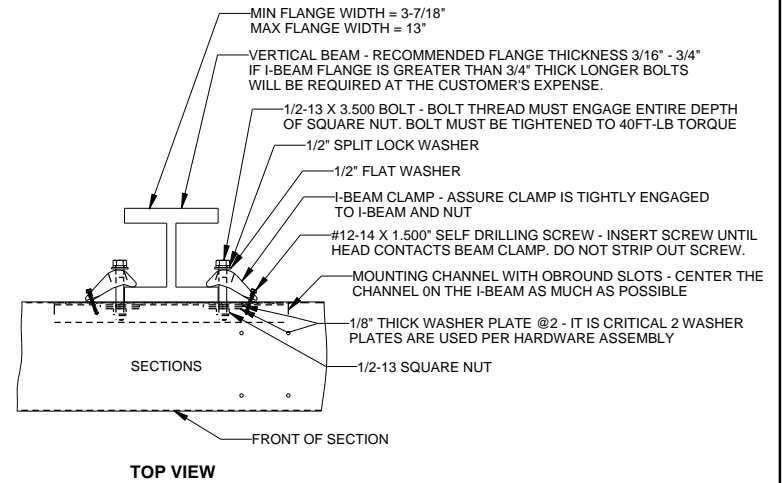


QUALIFIED FOR SECTIONS UP TO 5' IN HEIGHT USING RECOMMENDED STRUCTURE

ALLOWABLE CAPACITY PER EACH CLAMP:
SHEAR = 160 LBS
TENSION = 1376 LBS

SHEAR AND TENSION LOAD DIRECTION ARE AS INDICATED ON ROTATED VIEWS


MOUNTING INSTRUCTIONS:

- LIFT THE FIRST SECTION OF THE DISPLAY INTO POSITION AGAINST I-BEAMS.
NOTE: IF THE DISPLAY IS MADE UP OF MULTIPLE SECTIONS ALWAYS INSTALL THE BOTTOM SECTION FIRST AND WORK UP.
- STARTING ON THE TOP OF THE SECTION BEING INSTALLED MARK AND DRILL 9/16" HOLES IN THE CENTER OF THE TOP FLANGE OF THE SECTION. MAKE SURE THE HOLES ARE POSITIONED AS CLOSE TO THE I-BEAM FLANGES AS POSSIBLE.
- INSTALL ALL THE HARDWARE SHOWN PROVIDED AND TIGHTEN THE SECTION IN THE DESIRED LOCATION.
- ONCE THE TOP OF THE SECTION IS SECURE MOVE TO THE BOTTOM OF THE SECTION AND REPEAT THE STEPS ABOVE.
- IF THE DISPLAY IS MADE OF MULTIPLE SECTIONS REPEAT THE ENTIRE PROCEDURE ABOVE.
- ENSURE ALL 1/2" HARDWARE IS TORQUED TO THE SPECIFIED AMOUNT.

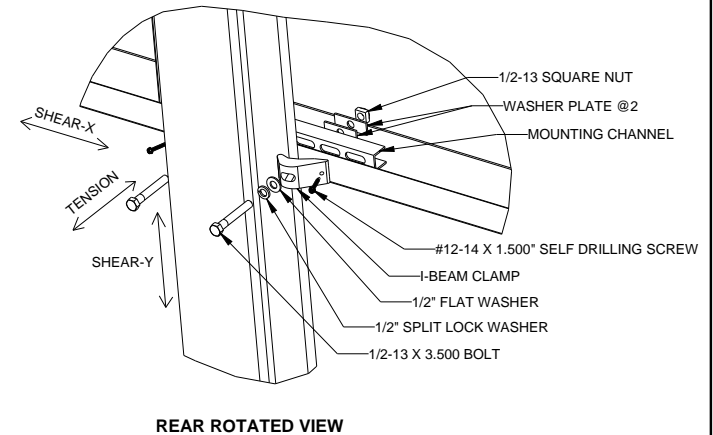


DAKTRONICS, INC. BROOKINGS, SD 57006		THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2014 DAKTRONICS, INC.	
DO NOT SCALE DRAWING			
PROJ: OUTDOOR SCOREBOARD			
TITLE: I-BEAM CLAMP MOUNTING, SHEET METAL ATTACHMENT			
DESIGN: KSCHNABEL	DRAWN: KSCHNABEL	DATE: 17-JUN-15	
SCALE: 1/8"			
SHEET: 1 OF 1	REV: 02	JOB NO: P 1753	FUNC-TYPE-SIZE: E - 10 - B
			1129110


REV 02	DATE: 17 JUN 15	CHANGED TENSION CAPACITY TO 1376 LBS ADDED MINIMUM AND MAXIMUM FLANGE WIDTHS	BY: AMP
REV 01	DATE: 8 JAN 14	ADDED ALLOWABLE TENSION AND SHEAR CAPACITY DETAILS ADDED NON-BKLT AD PANEL MOUNTING DETAILS CHANGED DIMS TO B SIZED.	BY: JAVA

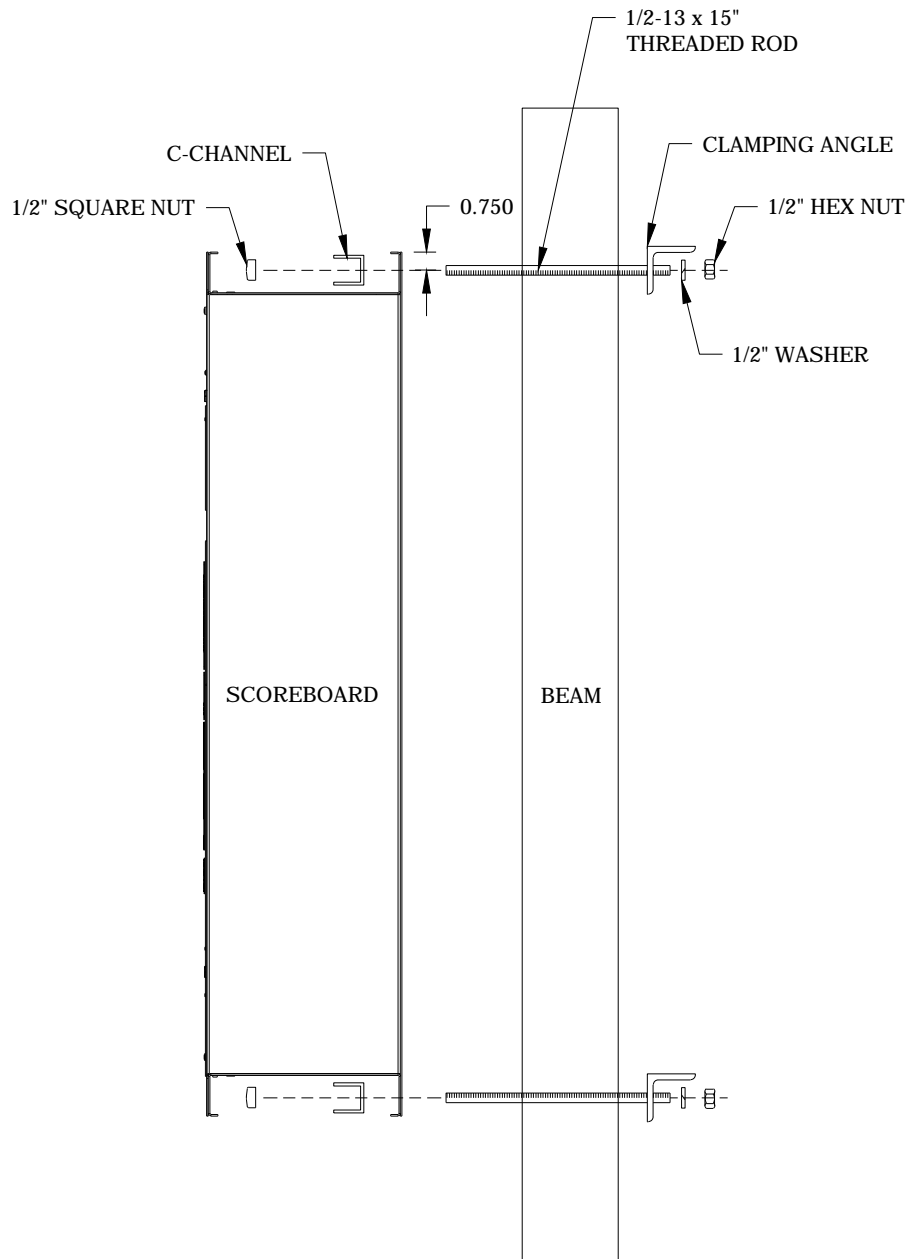


MOUNTING INSTRUCTIONS:

1. USE THE MOUNTING CHANNEL TO DETERMINE WHICH HOLE COMBINATION SHOULD BE USED. BE SURE TO KEEP THE BOLT AS CLOSE TO THE BEAM AS POSSIBLE.
2. USING THE MOUNTING CHANNEL AS A TEMPLATE, DRILL 9/16" HOLES IN THE UPPER AND LOWER REAR FLANGE OF SCOREBOARDS WHERE THE SUPPORTS WILL GO.
3. PLACE SQUARE NUTS INSIDE CHANNEL AND THREAD BOLTS THROUGH.
4. LIFT SCOREBOARD INTO POSITION WITH BOLTS STILL IN PLACE.
5. PLACE MOUNTING ANGLES OVER EACH PAIR OF BOLTS AND SECURE WITH LOCK WASHERS AND HEX NUTS.
6. WHEN SCOREBOARD IS ADJUSTED TO FINAL DESIRED POSITION, TIGHTEN HEX NUTS FIRMLY.


 DAKTRONICS, INC. BROOKINGS, SD 57006		THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2013 DAKTRONICS, INC.	
		DO NOT SCALE DRAWING	
PROJ: OUTDOOR SHEET METAL SCOREBOARDS			
TITLE: SCOREBOARD MOUNTING			
DESIGN: KDRAGT		DRAWN: KDRAGT	DATE: 14 MAR 13
SCALE: 1=8			
SHEET	REV	JOB NO:	FUNC-TYPE-SIZE
	00	P1753	E-10-A
			1130246

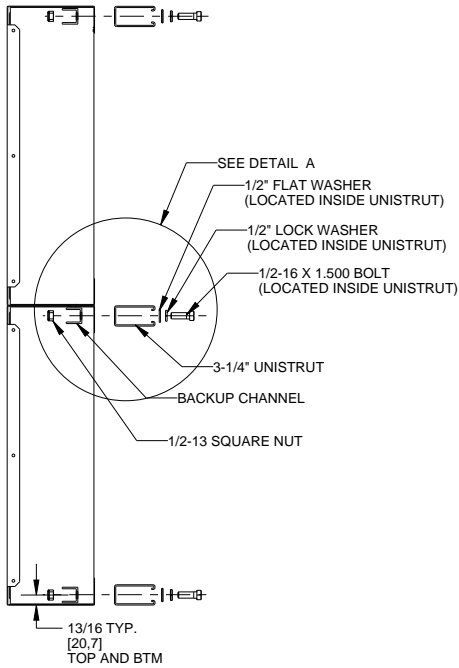

EXPLODED SIDE VIEW UNISTRUT ATTACHMENT
SCALE 1/10

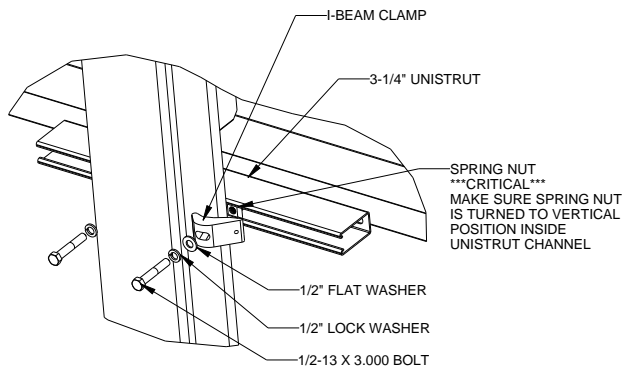


EXPLODED REAR ROTATED VIEW AD PANEL ATTACHMENT
SCALE 1/8

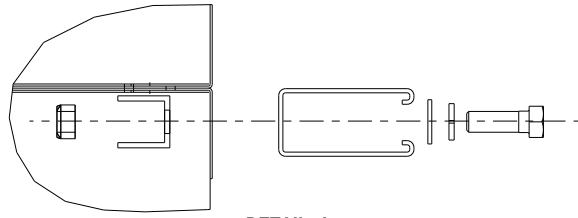


DETAIL A
SCALE 1/3

RECOMMENDED METHOD OF INSTALLATION:
 - INSTALL 1 1/2" BOLT, 1/2" LOCK WASHER, 1/2" FLAT WASHER USING SHALLOW SOCKET WITH EXTENSION.
 - ENTER FROM SIDE OF UNISTRUT SECURING INSIDE BOLTS FIRST AND MOVING OUTWARD

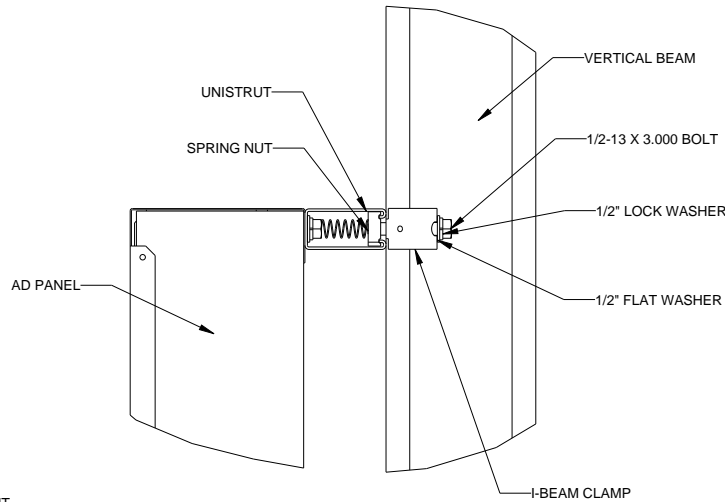

SIDE VIEW AD PANEL ATTACHMENT
SCALE 1/5

CRITICAL
 DO NOT USE ANY LUBRICANT ON ANY MOUNTING HARDWARE OR WARRANTY WILL BE VOIDED

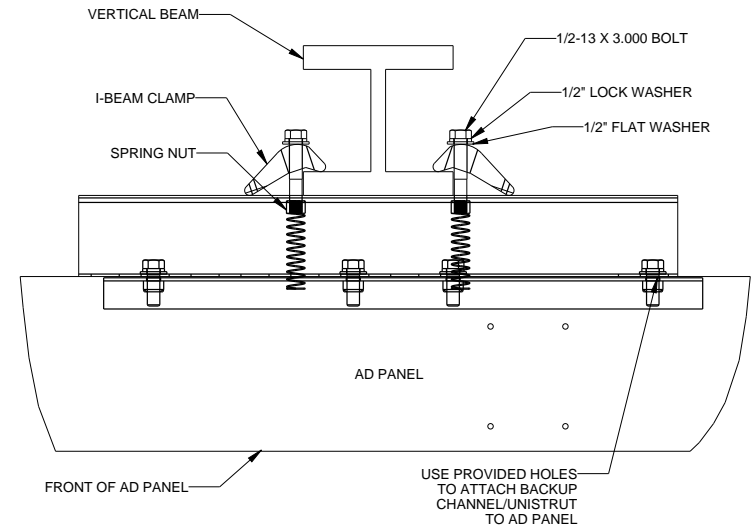

TOP VIEW AD PANEL ATTACHMENT
SCALE 1/5

STRUCTURAL NOTES:


ALLOWABLE LOADS PER COLUMN CONNECTION

MAX ALLOWABLE WIND LOAD: 2,400 LBS
 MAX ALLOWABLE PANEL WEIGHT: 158 LBS
 COEFFICIENT OF FRICTION: 0.03
 BOLT TORQUE: 50 FT-LB
 MIN-MAX I-BEAM FLANGE THICKNESS: 0.25"-0.75"

MOUNTING INSTRUCTIONS:

1. USING THE BACKUP CHANNEL AS A TEMPLATE, DRILL $\varnothing 9/16$ " HOLES IN THE UPPER AND LOWER REAR FLANGE OF THE AD PANEL WHERE THE VERTICAL BEAMS WILL BE LOCATED.
2. IF AD PANEL HAS BACKSHEETS, REMOVE BACKSHEETS NECESSARY AT THIS TIME TO ACCESS HARDWARE FOR UNISTRUT ATTACHMENT
3. ATTACH UNISTRUT TO AD PANEL THROUGH HOLES DRILLED IN STEP 1 AS SHOWN IN UNISTRUT ATTACHMENT SIDE VIEW
4. REPLACE BACKSHEETS REMOVED IN STEP 2
5. PLACE SPRING NUTS INTO UNISTRUT IN APPROXIMATE LOCATION OF VERTICAL BEAMS
7. LIFT AD PANEL INTO POSITION
8. ATTACH I-BEAM CLAMPS WITH 1/2" HARDWARE AS SHOWN IN TOP AND REAR ISOMETRIC VIEW AD PANEL ATTACHMENT
9. MAKE SURE THE 1/2-13 BOLTS ARE AS CLOSE TO THE I-BEAM FLANGES AS POSSIBLE
10. WHEN AD PANEL IS ADJUSTED TO FINAL DESIRED POSITION, TIGHTEN BOLTS FIRMLY


REV	DATE:	BY:	
			THIRD ANGLE PROJECTION
THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2018 DAKTRONICS, INC. (USA)			
PROJECT: OUTDOOR AD PANELS			
TITLE: LVX AD PANEL I-BEAM CLAMP MOUNTING			
DATE: 18-MAY-18	DIM UNITS: INCHES (MILLIMETERS)	SHEET	REV
SCALE: 1/5	DO NOT SCALE DRAWING	1 OF 1	00
DESIGN: KDRAGT	JOB NO. P1091	FUNC - TYPE - SIZE	3918326
DRAWN: KDRAGT		E - 10 - B	

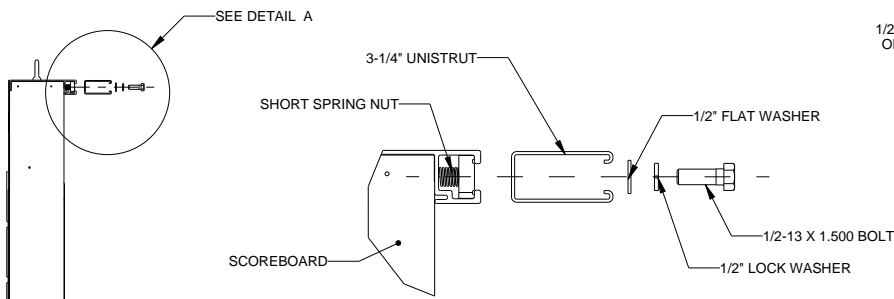

**DETAIL A
SCALE 1/4**


RECOMMENDED METHOD OF INSTALLATION:
 - INSTALL 1 1/2" BOLT, 1/2" LOCK WASHER, 1/2" FLAT WASHER
 USING SHALLOW SOCKET WITH EXTENSION.
 - ENTER FROM SIDE OF UNISTRUT SECURING INSIDE BOLTS
 FIRST AND MOVING OUTWARD.

**EXPLODED SIDE VIEW
UNISTRUT ATTACHMENT
SCALE 1/15**

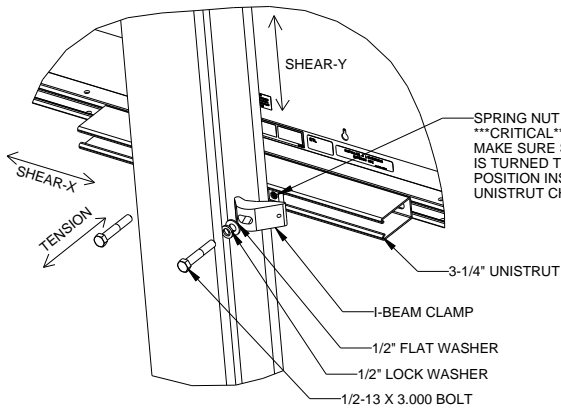


EXPLODED REAR ROTATED VIEW

SCALE 1/8

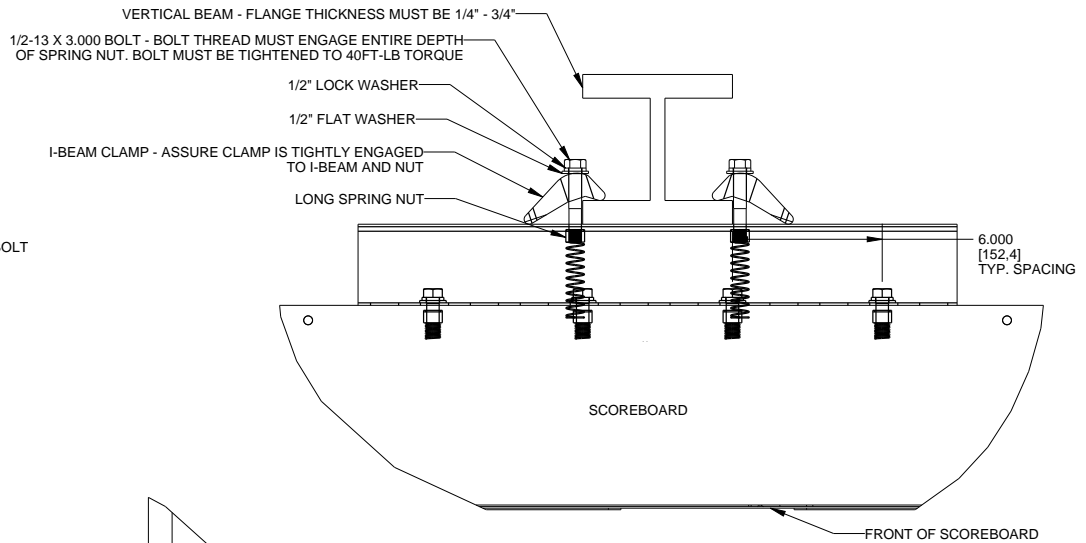

TOP VIEW

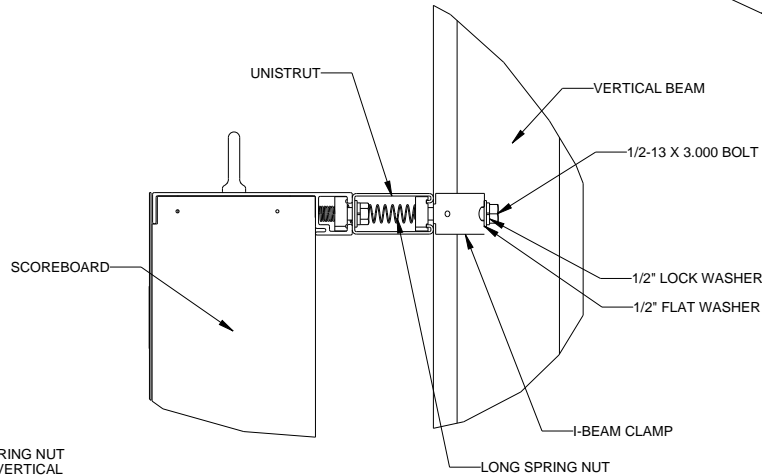

**SIDE VIEW
SCOREBOARD ATTACHMENT**

STRUCTURAL NOTES

ALLOWABLE CAPACITY PER
 COLUMN CONNECTION:
 SHEAR = 185 LBS
 TENSION = 2400 LBS

SHEAR AND TENSION LOAD
 DIRECTION ARE AS INDICATED ON
 REAR ISOMETRIC VIEW

STANDARD MOUNTING METHOD

MOUNTING INSTRUCTIONS:

1. PLACE SPRING NUTS INTO SCOREBOARD CHANNEL IN LOCATIONS SHOWN IN TOP VIEW
2. PLACE SPRING NUTS IN UNISTRUT IN APPROXIMATE LOCATION OF VERTICAL BEAMS
3. LIFT SCOREBOARD INTO POSITION
4. MAKE SURE THE 1/2-13 BOLTS ARE AS CLOSE TO THE I-BEAM FLANGES AS POSSIBLE
5. WHEN SCOREBOARD IS ADJUSTED TO FINAL DESIRED POSITION, TIGHTEN BOLTS FIRMLY
6. IF FLANGE THICKNESS IS MORE THAN 3/4" THICK LONGER BOLTS WILL BE REQUIRED AT THE CUSTOMER'S EXPENSE.

*****CRITICAL***
 DO NOT USE ANY LUBRICANT
 ON ANY MOUNTING HARDWARE
 OR WARRANTY WILL BE VOIDED**

REV	DATE:	BY:	
			<small>THIRD ANGLE PROJECTION</small>
<small>THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS WITHOUT THE EXPRESS WRITTEN CONSENT OF DAKTRONICS, INC. OR ITS WHOLLY OWNED SUBSIDIARIES. COPYRIGHT 2018 DAKTRONICS, INC. (USA)</small>			
PROJECT: OUTDOOR SCOREBOARD			
TITLE: P1647: LVX I-BEAM CLAMP MOUNTING			
DATE:	18-MAY-18	DIM UNITS: INCHES (MILLIMETERS)	SHEET 1 OF 1
SCALE:	1/5	DO NOT SCALE DRAWING	REV 00
DESIGN:	KDRAGT	JOB NO. P1647	FUNC - TYPE - SIZE E - 07 - B
DRAWN:	KDRAGT		3918361

C Daktronics Warranty & Limitation of Liability

This section includes the Daktronics Warranty & Limitation of Liability statement (SL-02374).

This page intentionally left blank.

DAKTRONICS WARRANTY & LIMITATION OF LIABILITY

This Warranty and Limitation of Liability (the "Warranty") sets forth the warranty provided by Daktronics with respect to the Equipment. By accepting delivery of the Equipment, Purchaser and End User agree to be bound by and accept these terms and conditions. Unless otherwise defined herein, all terms within the Warranty shall have the same meaning and definition as provided elsewhere in the Agreement.

DAKTRONICS WILL ONLY BE OBLIGATED TO HONOR THE WARRANTY SET FORTH IN THESE TERMS AND CONDITIONS UPON RECEIPT OF FULL PAYMENT FOR THE EQUIPMENT

1. Warranty Coverage.

- A. Daktronics warrants to the original end user (the "End User", which may also be the Purchaser) that the Equipment will be free from Defects (as defined below) in materials and workmanship for a period of one (1) year (the "Warranty Period"). The Warranty Period shall commence on the earlier of: (i) four weeks from the date that the Equipment leaves Daktronics' facility; or (ii) Substantial Completion as defined herein. The Warranty Period shall expire on the first anniversary of the commencement date.

"Substantial Completion" means the operational availability of the Equipment to the End User in accordance with the Equipment's specifications, without regard to punch-list items, or other non-substantial items which do not affect the operation of the Equipment
- B. Daktronics' obligation under this Warranty is limited to, at Daktronics' option, replacing or repairing, any Equipment or part thereof that is found by Daktronics not to conform to the Equipment's specifications. Unless otherwise directed by Daktronics, any defective part or component shall be returned to Daktronics for repair or replacement. This Warranty does not include on-site labor charges to remove or install these components. Daktronics may, at its option, provide on-site warranty service. Daktronics shall have a reasonable period of time to make such replacements or repairs and all labor associated therewith shall be performed during regular working hours. Regular working hours are Monday through Friday between 8:00 a.m. and 5:00 p.m. at the location where labor is performed, excluding any holidays observed by Daktronics.
- C. Daktronics shall pay ground transportation charges for the return of any defective component of the Equipment. All such items shall be shipped by End User DDP Daktronics designated facility per Incoterms® 2020. If returned Equipment is repaired or replaced under the terms of this Warranty, Daktronics will prepay ground transportation charges back to End User and shall ship such items DDP End User's designated facility per Incoterms® 2020; otherwise, End User shall pay transportation charges to return the Equipment back to the End User and such Equipment shall be shipped Ex Works Daktronics designated facility per Incoterms® 2020. All returns must be pre-approved by Daktronics before shipment. Daktronics shall not be obligated to pay freight for any unapproved return. End User shall pay any upgraded or expedited transportation charges
- D. Any replacement parts or Equipment will be new or serviceably used, comparable in function and performance to the original part or Equipment and warranted for the remainder of the Warranty Period. Purchasing additional parts or Equipment from the Seller does not extend the Warranty Period.
- E. Defects shall be defined as follows. With regard to the Equipment (excepting LEDs), a "Defect" shall refer to a material variance from the design specifications that prohibit the Equipment from operating for its intended use. With respect to LEDs, "Defects" are defined as LED pixels that cease to emit light. Unless otherwise expressly provided, this Warranty does not impose any duty or liability upon Daktronics for partial LED pixel degradation. Notwithstanding the foregoing, in no event does this Warranty include LED pixel degradation caused by UV light. This Warranty does not provide for the replacement or installation of communication methods including but not limited to, wire, fiber optic cable, conduit, trenching, or for the purpose of overcoming local site interference radio equipment substitutions.

EXCEPT AS OTHERWISE EXPRESSLY SET FORTH IN THIS WARRANTY, TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, DAKTRONICS DISCLAIMS ANY AND ALL OTHER PROMISES, REPRESENTATIONS AND WARRANTIES APPLICABLE TO THE EQUIPMENT AND REPLACES ALL OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ACCURACY OR QUALITY OF DATA. OTHER ORAL OR WRITTEN INFORMATION OR ADVICE GIVEN BY DAKTRONICS, ITS AGENTS OR EMPLOYEES, SHALL NOT CREATE A WARRANTY OR IN ANY WAY INCREASE THE SCOPE OF THIS LIMITED WARRANTY.

THIS LIMITED WARRANTY IS NOT TRANSFERABLE.

2. Exclusion from Warranty Coverage

This Warranty does not impose any duty or liability upon Daktronics for any:

- A. damage occurring at any time, during shipment of Equipment unless otherwise provided for in the Agreement. When returning Equipment to Daktronics for repair or replacement, End User assumes all risk of loss or damage, agrees to use any shipping containers that might be provided by Daktronics, and to ship the Equipment in the manner prescribed by Daktronics;
- B. damage caused by: (i) the improper handling, installation, adjustment, use, repair, or service of the Equipment, or (ii) any physical damage which includes, but is not limited to, missing, broken, or cracked components resulting from non-electrical causes;

DAKTRONICS WARRANTY & LIMITATION OF LIABILITY

altered, scratched, or fractured electronic traces; missing or gauged solder pads; cuts or clipped wires; crushed, cracked, punctured, or bent circuit boards; or tampering with any electronic connections, provided that such damage is not caused by personnel of Daktronics or its authorized repair agents;

- C. damage caused by the failure to provide a continuously suitable environment, including, but not limited to: (i) neglect or misuse; (ii) improper power including, without limitation, a failure or sudden surge of electrical power; (iii) improper air conditioning, humidity control, or other environmental conditions outside of the Equipment's technical specifications such as extreme temperatures, corrosives and metallic pollutants; or (iv) any other cause other than ordinary use;
- D. damage caused by fire, flood, earthquake, water, wind, lightning or other natural disaster, strike, inability to obtain materials or utilities, war, terrorism, civil disturbance, or any other cause beyond Daktronics' reasonable control;
- E. failure to adjust, repair or replace any item of Equipment if it would be impractical for Daktronics personnel to do so because of connection of the Equipment by mechanical or electrical means to another device not supplied by Daktronics, or the existence of general environmental conditions at the site that pose a danger to Daktronics personnel;
- F. statements made about the product by any salesperson, dealer, distributor or agent, unless such statements are in a written document signed by an officer of Daktronics. Such statements as are not included in a signed writing do not constitute warranties, shall not be relied upon by End User and are not part of the contract of sale;
- G. damage arising from the use of Daktronics products in any application other than the commercial and industrial applications for which they are intended, unless, upon request, such use is specifically approved in writing by Daktronics;
- H. replenishment of spare parts. In the event the Equipment was purchased with a spare parts package, the parties acknowledge and agree that the spare parts package is designed to exhaust over the life of the Equipment, and as such, the replenishment of the spare parts package is not included in the scope of this Warranty;
- I. security or functionality of the End User's network or systems, or anti-virus software updates;
- J. performance of preventive maintenance;
- K. third-party systems and other ancillary equipment, including without limitation front-end video control systems, audio systems, video processors and players, HVAC equipment, batteries and LCD screens;
- L. incorporation of accessories, attachments, software or other devices not furnished by Daktronics; or
- M. paint or refinishing the Equipment or furnishing material for this purpose.

3. Limitation of Liability

- A. Daktronics shall be under no obligation to furnish continued service under this Warranty if alterations are made to the Equipment without the prior written approval of Daktronics.
- B. It is specifically agreed that the price of the Equipment is based upon the following limitation of liability. In no event shall Daktronics (including its subsidiaries, affiliates, officers, directors, employees, or agents) be liable for any claims asserting or based on (a) loss of use of the facility or equipment; lost business, revenues, or profits; loss of goodwill; failure or increased cost of operations; loss, damage or corruption of data; loss resulting from system or service failure, malfunction, incompatibility, or breaches in system security; or (b) any special, consequential, incidental or exemplary damages arising out of or in any way connected with the Equipment or otherwise, including but not limited to damages for lost profits, cost of substitute or replacement equipment, down time, injury to property or any damages or sums paid to third parties, even if Daktronics has been advised of the possibility of such damages. The foregoing limitation of liability shall apply whether any claim is based upon principles of contract, tort or statutory duty, principles of indemnity or contribution, or otherwise
- C. In no event shall Daktronics be liable for loss, damage, or injury of any kind or nature arising out of or in connection with this Warranty in excess of the Purchase Price of the Equipment. The End User's remedy in any dispute under this Warranty shall be ultimately limited to the Purchase Price of the Equipment to the extent the Purchase Price has been paid.

4. Assignment of Rights

- A. The Warranty contained herein extends only to the End User (which may be the Purchaser) of the Equipment and no attempt to extend the Warranty to any subsequent user-transferee of the Equipment shall be valid or enforceable without the express written consent of Daktronics.

5. Governing Law; Election of Remedies

- A. The rights and obligations of the parties under this Warranty shall not be governed by the provisions of the United Nations Convention on Contracts for the International Sales of Goods of 1980. The parties consent to the application of the laws of the State of South Dakota to govern, interpret, and enforce each of the parties' rights, duties, and obligations arising from, or relating in any manner to, the subject matter of this Warranty, without regard to conflict of law principles.
- B. Any dispute, controversy or claim arising from or related to this Warranty, the parties shall first attempt to settle through negotiations. In the event that no resolution is reached, then such dispute, controversy, or claim shall be resolved by final and binding arbitration under the Rules of Arbitration of the International Chamber of Commerce. The language of the arbitration



DAKTRONICS WARRANTY & LIMITATION OF LIABILITY

shall be English. The place of the arbitration shall be Sioux Falls, SD. A single arbitrator selected by the parties shall preside over the proceeding. If a single arbitrator cannot be agreed upon by the parties, each party shall select an arbitrator, and those arbitrators shall confer and agree on the appointed arbitrator to adjudicate the arbitration. The arbitrator shall have the power to grant any provisional or final remedy or relief that it deems appropriate, including conservatory measures and an award of attorneys' fees. The arbitrator shall make its decisions in accordance with applicable law. By agreeing to arbitration, the Parties do not intend to deprive any court of its jurisdiction to issue a pre-arbitral injunction, pre-arbitral attachment, or other order in aid of arbitration proceedings and the enforcement of any award. Without prejudice to such provisional remedies as may be available under the jurisdiction of a court, the arbitrator shall have full authority to grant provisional remedies and to direct the Parties to request that any court modify or vacate any temporary or preliminary relief issued by such court, and to award damages for the failure of any Party to respect the arbitrator's orders to that effect.

6. Availability of Extended Service Agreement

- A. For End User's protection, in addition to that afforded by the warranties set forth herein, End User may purchase extended warranty services to cover the Equipment. The Extended Service Agreement, available from Daktronics, provides for electronic parts repair and/or on-site labor for an extended period from the date of expiration of this warranty. Alternatively, an Extended Service Agreement may be purchased in conjunction with this Warranty for extended additional services. For further information, contact Daktronics Customer Service at 1-800-DAKTRONics (1-800-325-8766).

Additional Terms applicable to sales outside of the United States

The following additional terms apply **only** where the installation site of the Equipment is located outside of the United States of America.

1. In the event that the installation site of the Equipment is in a country other than the U.S.A., then, notwithstanding Section 5 of the Warranty, where the selling entity is the entity listed in Column 1, then the governing law of this Warranty is the law of the jurisdiction listed in the corresponding row in Column 2 without regard to its conflict of law principles. Furthermore, if the selling entity is an entity listed in Column 1, then the place of arbitration is listed in the corresponding row in Column 3.

Column 1 (Selling Entity)	Column 2 (Governing Law)	Column 3 (Location of Arbitration)
Daktronics, Inc.	The state of Illinois	Chicago, IL, U.S.A.
Daktronics Canada, Inc.	The Province of Ontario, Canada	Toronto, Ontario, Canada
Daktronics UK Ltd.	England and Wales	Bristol, UK
Daktronics GmbH	The Federal Republic of Germany	Wiesbaden, Germany
Daktronics Hong Kong Limited	Hong Kong, Special Administrative Region of the P.R.C.	Hong Kong SAR
Daktronics Shanghai Co., Ltd.	The Peoples Republic of China	Shanghai, P.R.C.
Daktronics France, SARL	France	Paris, France
Daktronics Japan, Inc.	Japan	Tokyo, Japan
Daktronics International Limited	Macau, Special Administrative Region of the P.R.C.	Macau SAR
Daktronics Australia Pad Ltd	Australia	Sydney, Australia
Daktronics Singapore Pte. Ltd	Singapore	Singapore
Daktronics Brazil LTDA	Brazil	São Paulo, Brazil
Daktronics Spain S.L.U.	Spain	Madrid, Spain
Daktronics Belgium N. V	Belgium	Kruikeke, Belgium
Daktronics Ireland Co. Ltd.	Ireland	Dublin, Ireland

This page intentionally left blank.

Attachment C

Daktronics BA-618 Architectural Specifications SL05255
(OR EQUAL)

DAKTRONICS BA-618 BASEBALL SCOREBOARD

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Single-sided LED baseball scoreboard

1.02 REFERENCES

- A. Standard for Electric Signs, UL 48
- B. Standard for CSA C22.2 #207
- C. Federal Communications Commission Regulation Part 15
- D. National Electric Code

1.03 SUBMITTALS

- A. Product data: Submit manufacturer's product illustrations, data and literature that fully describe the scoreboards and accessories proposed for installation.
- B. Shop drawings: Submit mechanical and electrical drawings.
- C. Maintenance data: Submit manufacturer's installation, operation, and maintenance manuals.

1.04 DELIVERY, STORAGE, AND HANDLING

- A. Product delivered on site
- B. Scoreboard and equipment to be housed in a clean, dry environment

1.05 PROJECT CONDITIONS

- A. Environmental limitations: Do not install scoreboard equipment until mounting structure is secure and concrete has ample time to cure.
- B. Field measurements: Verify position and elevation of structure and its layout for scoreboard equipment. Verify dimensions by field measurements.
- C. Verify mounting structure is capable of supporting the scoreboard's weight and windload in addition to the auxiliary equipment.
- D. Installation may proceed within acceptable weather conditions.

1.06 QUALITY ASSURANCE

- A. For outdoor use
- B. Source Limitations: Obtain each type of scoring or related equipment through one source from a single manufacturer.
- C. ETL listed to UL 48
- D. NEC compliant
- E. FCC compliant
- F. ETLC listed to CSA 22.2 #207

1.07 WARRANTY

- A. Provide 5 years of no cost parts exchange including standard shipping on electronics parts and radios due to manufacturing defects
- B. Provide toll-free service coordination
- C. Provide technical phone support during Daktronics business hours

DAKTRONICS BA-618 BASEBALL SCOREBOARD

PART 2 PRODUCTS

2.01 MANUFACTURER

A. Daktronics, Inc., 201 Daktronics Drive, P.O. Box 5128, Brookings, SD 57006-5128

B. _____

C. _____

2.02 PRODUCT

A. Daktronics BA-618 single-sided baseball scoreboard displays HOME and GUEST scores to 99 and INNING to 19 and indicates BALL, STRIKE, OUT, and H (hit) or E (error).

2.03 SCOREBOARD

A. General information

1. Dimensions: 5'-0" (1.52 m) high, 14'-0" (4.27 m) wide, 0'-8" (203 mm) deep
2. Weight: 200 lb (91 kg)
3. Power requirement: 80 W (red/amber digits), 165 W (white digits)
4. Color: provide over 150 colors to choose from

B. Construction

1. Alcoa aluminum alloy 5052 for excellent corrosion resistance
2. Scoreboard back, face, and perimeter: 0.063" (1.60 mm) thick
3. Scoreboard top and bottom: 0.125" (3.18 mm) thick

C. Digits & Indicators

1. LED color **[White]**
2. HOME, GUEST and INNING digits: 18" (457 mm) high
3. BALL, STRIKE, OUT, H, and E indicators: 2" (51 mm) diameter
4. Seven bar segments per digit
5. PanaView® LED digit technology
6. All digits and indicators are sealed front and back with weather-tight silicone gel

D. Captions

1. Vinyl applied directly to scoreboard face
2. HOME and GUEST captions: 12" (305 mm) high
3. INNING caption: 10" (254 mm) high
4. BALL, STRIKE, OUT, H, and E captions: 8" (203 mm) high
5. Color: standard white or others available upon request

E. Accessory Equipment

1. **[Vinyl striping applied around the scoreboard face]**
2. **[Custom team name caption in place of HOME] [Team names on changeable panels]**

2.04 SCORING CONSOLE

- A. Console is an All Sport® 1600 controller
- B. Scores multiple sports using changeable keyboard inserts
- C. Controls multiple scoreboards and displays, including other All Sport 1600 controlled displays currently owned by customer
- D. Recalls clock, score, and period information if power is lost
- E. Runs Time of Day and Segment Timer modes
- F. Console includes:
 1. Rugged aluminum enclosure to house electronics

DAKTRONICS BA-618 BASEBALL SCOREBOARD

2. Sealed membrane water-resistant keyboard
 3. 32-character LCD to verify entries and recall information currently displayed
 4. Power cord that plugs into a standard grounded outlet; 3 watts max
 5. Control cable to connect to the control receptacle junction box (wired system only)
 6. Soft-sided carrying case
- G. Accessory Equipment
1. **[2.4 GHz spread spectrum radio system with frequency hopping technology and 64 non-interfering channels; system includes a transmitter installed inside the console and a receiver installed inside the scoreboard(s)]**
 2. **[Hard carrying case]**
 3. **[Battery pack]**

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that mounting structure is ready to receive scoreboard. Verify that placement of conduit and junction boxes are as specified and indicated in plans and shop drawings. Verify concrete has cured adequately according to specifications.

3.02 INSTALLATION

- A. All power and control cables to scoreboards and displays will be routed in conduit. Power to the scoreboards/displays as well as raceways shown on electrical plans by the Electrical Contractor. Scoreboard control wiring including conduit will be the responsibility of the contractor assigned the scoreboard equipment.
- B. Install scoreboards and exterior displays to beams in location detailed and in accordance with manufacturer's instructions. Verify unit is plumb and level.

3.03 INSTALLATION—CONTROL CENTER

- A. Provide boxes, cover plates and jacks in locations per plans.
- B. Test connect control unit to all jacks and check for proper operation of control unit, scoreboard and all features. Leave control unit in carrying case and other loose accessories with owner's designated representative.
- C. Verify earth ground does not exceed 15 ohms.

END OF SECTION

Attachment D

Daktronics All Sport 5000 Console Product Specifications (OR EQUAL)

DAKTRONICS ALL SPORT 5000 PRODUCT SPECIFICATIONS



DIMENSIONS	WEIGHT	POWER (120/240 VAC)
4.25" H x 16.25" W x 9" D (108 mm, 413 mm, 229 mm)	7 lb (3.2 kg)	6 Watts

DISPLAY

A 32-character liquid crystal display (LCD) prompts the operator and provides vital feedback. Two lines of 16 characters provide easy viewing of game in progress information. The LCD is backlit with LEDs to allow for readability in dark areas as well as bright sunlight.

- Viewing area: 3.89" W x 0.94" H (99 mm, 24 mm)
- Characters: 0.189" W x 0.378" H (4.8 mm, 9.6 mm)

CONSTRUCTION

Heavy-duty aluminum case is the toughest line of defense against drops, static electricity, and high/low temperatures. The console's "snap-action" keyboard is sealed, making it resistant to moisture and spills. An internal beeper helps to indicate a completed keystroke.

SPORT MODES

Interchangeable sport inserts allow a single console to work for a wide variety of indoor and outdoor sports. Sport inserts reduce the confusion of having multiple functions on individual keys. On most inserts, HOME keys are color-coded green and GUEST keys are red for quick identification. The All Sport 5000 console can also be custom-programmed as needed.

NON-VOLATILE MEMORY

The most current information is automatically stored on a memory chip without the need for a battery, should there be a loss of power. The memory cannot be erased and is only overwritten once new information is entered.

PRODUCT SAFETY APPROVAL

ETL-listed, tested to CSA standards, and CE-labeled; FCC approved

OPERATING TEMPERATURES

32° to 130° Fahrenheit (0° to 54° Celsius)

GENERAL INFORMATION

Console can control multiple scoreboards and stat panels, display tenth-of-a-second times, and features Time of Day and Segment Timer modes. Console is static electricity resistant to 20,000 volts. Specifications and pricing are subject to change without notice.

OPTIONS & ACCESSORIES

- Durable carrying case (see [SL-04551](#))
- 2.4 GHz spread spectrum radio control (see [SL-04370](#))
- Handheld shot clock controllers
- External battery kit (see [SL-04457](#))

FOR ADDITIONAL INFORMATION

- Manual: See [ED-11976](#)
- Quick Guide: See [DD2077845](#)

WWW.DAKTRONICS.COM E-MAIL: SALES@DAKTRONICS.COM

201 Daktronics Drive, PO Box 5128, Brookings, SD 57006
Phone: 1-800-325-8766 or 605-692-0200 Fax: 605-697-4746
SL-03991 011817 Page 1 of 2




DAKTRONICS ALL SPORT 5000 PRODUCT SPECIFICATIONS

FEATURE	BENEFIT
Cumulative memory	Saves points and fouls for up to 15 players per team in basketball mode and several user-defined player stats for volleyball for use on stat displays
Main & auxiliary scoreboard control	Control basketball shot clocks & stat displays, hockey goal lights or football delay-of-game clocks in addition to the main scoreboard from the same output signal
Real-Time Data (RTD) output	Displays game-in-progress information on electronic message displays
Track-timing interface	Displays information from automatic timing systems on standard football scoreboards
Multiple sport modes	Easily move the same console from venue to venue
TNMC control	Display custom names for each team on scoreboards that support optional programmable Team Name Message Centers (TNMCs)

TYPICAL CONTROL DIAGRAM

Refer to the diagram below for a typical layout of an All Sport 5000 controller, basketball scoreboard and optional shot clocks.

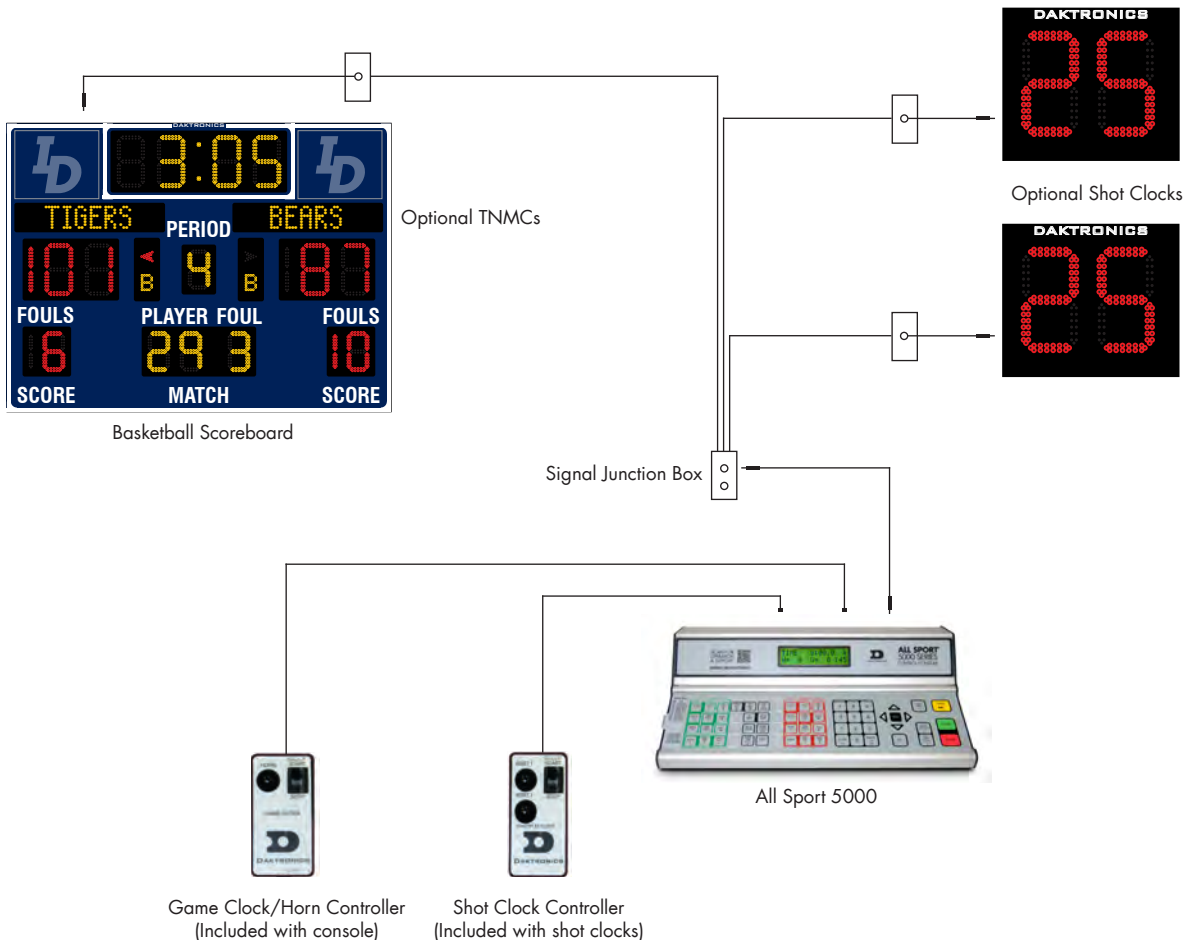

Attachment E

Daktronics All Sport Radio Control Option Product Specifications (OR EQUAL)

ALL SPORT RADIO CONTROL OPTION PRODUCT SPECIFICATIONS

Protective shell for antenna on console



Backed by over 20 years of radio design experience, Daktronics radio solution offers the reliability of Daktronics trusted All Sport® controller product line while eliminating the need for signal wire to the scoreboard. The 2.4 GHz spread spectrum radio system uses frequency hopping technology to eliminate interference from outside sources such as cordless/cellular phones, pagers and WiFi.

Numerous automated features make Daktronics radio solution easy to install, use and maintain. With new installations, the Daktronics radio option can easily pay for itself. Because there is no need to trench signal wire, it's not uncommon to save thousands of dollars on installation expenses.

FEATURE	BENEFIT
125 mW transmitter power (50 mW European)	– Large signal range: 500' (152 m) indoor, 1500' (457 m) outdoor with direct line-of-sight between transmitter and receiver Note: Control rooms with "Low-E" energy-efficient glass windows can significantly reduce effective signal range.
64 non-interfering channels	– Operate multiple radio systems in the same proximity
Software selectable channel on controller	– Channel will not be inadvertently changed when handling console – No mechanical switches that can wear out or break
2.4 GHz spread spectrum	– Greatly reduces possibility of interference – Tamper-resistant, highly-secure system
Auto-switching receivers	– Flexibility for split-court and multiple-console operation – Eliminates the need for dedicated consoles – Automatically searches and finds the appropriate controller
Rubber-sealed gasket (outdoor models)	– Keeps radio unit clean and moisture free

RECEIVER DIMENSIONS

5.65" H x 3.28" W x 1.50" D (143 mm, 83 mm, 38 mm)

OPERATING TEMPERATURES

32 to 158° Fahrenheit (0 to 70° Celsius)

PRODUCT SAFETY APPROVAL

ETL listed to UL standards and CSA tested; FCC approved

OPTIONS

Battery Kit for complete console portability (see [SL-04457](#))

WWW.DAKTRONICS.COM E-MAIL: SALES@DAKTRONICS.COM

All Sport® is a trademark of Daktronics, Inc.
SL-04370 031116 Page 1 of 1 Copyright © 2007-2016 Daktronics, Inc.

