


Ladder Safety



Ladder Safety

This course will help you learn how to work safely when using portable ladders to avoid falling and getting injured. It is designed to promote safe work practices based on requirements of the Portable and Fixed Ladder Standards.

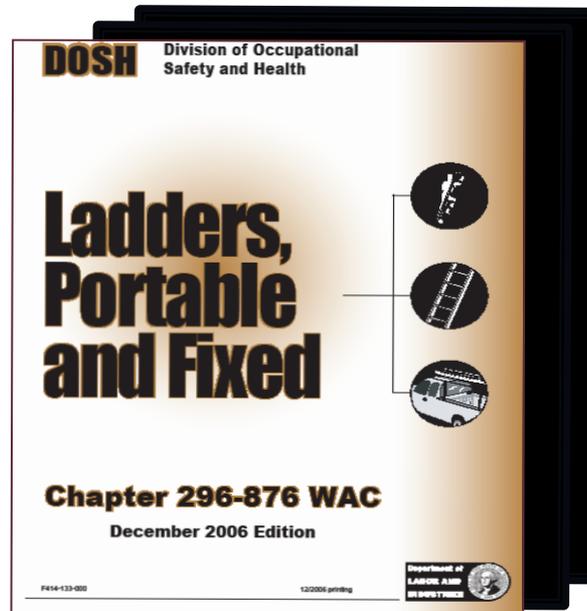

Topics Covered

- Introduction
 - Reasons for falls from ladders/ladder accidents
 - Ratings and labels on ladders
 - Inspection
 - Types
 - Safe use
 - Storage
- 

Introduction continued

Although ladders are easy to use, they are often misused or abused, causing serious injuries and deaths. These deaths and injuries could have been significantly reduced or eliminated with proper care and use.



Introduction continued

You don't have to fall far to get hurt. Workers injured in falls from ladders are usually less than 10 feet above the ladder's base of support.



The Most Common Causes of Ladder Accidents Are:

- ▶ Overreaching on ladders
 - ▶ Failure to secure ladders
 - ▶ Climbing one-handed
 - ▶ Standing on the top rung or platform
 - ▶ Using worn or damaged ladders
 - ▶ Leaving tools on ladders
- 

Types of Ladders

- ▶ Stepladders are self-supporting and good for low heights
- ▶ Extension or straight ladders lean against walls, a higher reach
- ▶ Fixed ladders



Duty Ratings



- ▶ Type IAA: Special-duty -- 375 lbs.
- ▶ Type IA: Extra heavy-duty -- 300 lbs.
- ▶ Type I: Heavy-duty -- 250 lbs.
- ▶ Type II: Medium-Duty -- 225 lbs.
- ▶ Type III: Light-Duty -- 200 lbs.

Load Limits

- ▶ Select a ladder designed to hold the necessary load, including worker and equipment (**Use only Type IA or Type I in an industrial setting**)
- ▶ Do not assume that a longer ladder has a higher duty rating. There is no relationship between length and duty rating.
- ▶ The American National Standards Institute (ANSI) requires that a duty rating sticker be placed on the side of every ladder so users can determine if they have the correct type ladder for each task/job.

Inspect Your Ladders

Check for damage prior to using:

- Make sure feet are not broken or malfunctioning and that the slip-resistant pads are secure.
- Inspect for cracks, bends & splits on the side rails, rungs & steps.
- Make sure both rung locks are working properly.
- Test the rope & pulley. Examine rope for any signs of fraying. Make sure the pulley is operating smoothly.



- Ensure all bolts and rivets are secure.
- Make sure ladder is free of foreign materials such as oil & grease.
- Make sure the spreader braces are secure & working properly.
- Aluminum or steel ladders should be inspected for rough burrs and sharp edges.

Immediately remove ladder from service if inspection finds

- ▶ Broken or missing steps, rungs or cleats
- ▶ Broken or damaged side rails
- ▶ Other faulty equipment such as missing feet, damaged connections, broken rivets

DANGER

**DAMAGED LADDER
DO NOT USE**

INSPECTED BY _____

DATE ___/___/___

Destroy & Dispose

Repair _____

Safe Ladder Use

- ▶ **Don't** carry tools in your hands. (A tool pouch or belt should be used or tools should be hoisted up)
 - ▶ **Don't** overreach to either side or lean too far forward or backward
- 


Safe Ladder Use

When climbing a ladder, you must have both hands free and face the ladder. This allows for three points of contact with the ladder at all times and reduces the chances of falling. The three point contact is two hands and one foot or one hand and two feet.



Not this way

This way

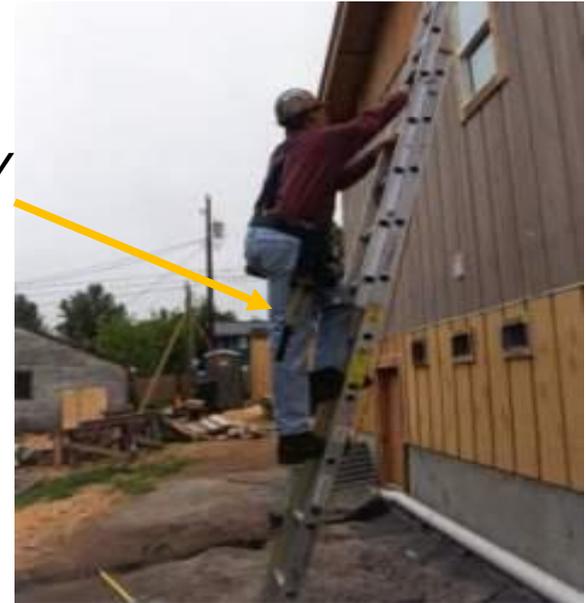

Safe Ladder Use

- ▶ The top or top step of a stepladder shall not be used as a step.
- ▶ 4 ft. rule – 3 pt. contact.
- ▶ Climbing ladder cross-bracing prohibited




Safe Ladder Use

When Working In A High Traffic Area:

- ▶ Place warning signs or barriers
- ▶ Lock doors that can swing open
- ▶ Have someone hold and guard the ladder



Safe Ladder Use

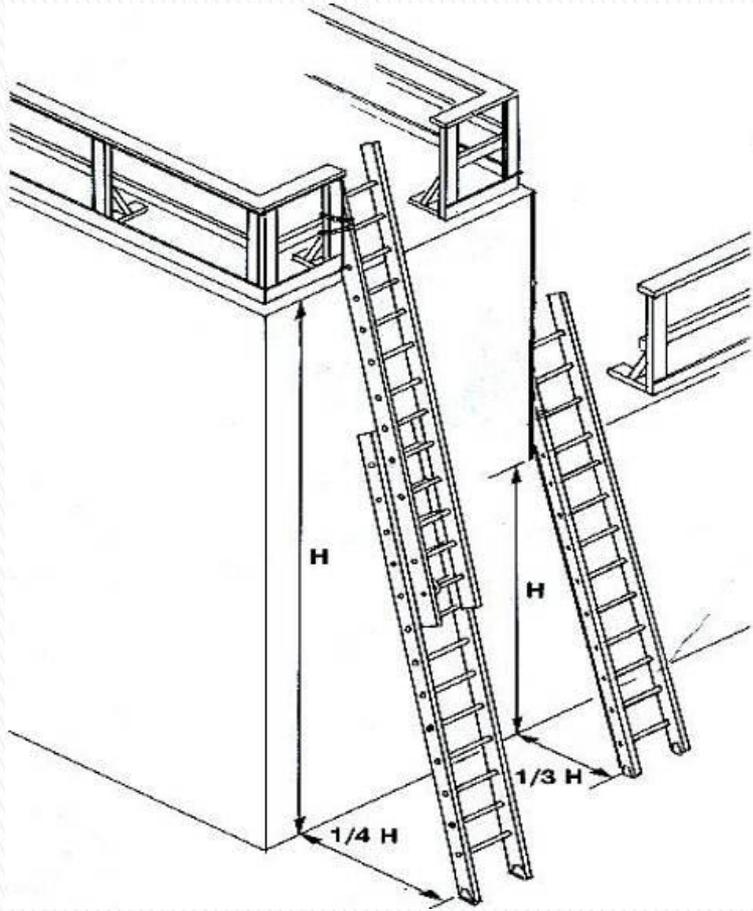

- ▶ Lean straight ladders at a base angle of $1/4$ the working length of the ladder from the top support

Proper Ladder Placement

- ▶ Place ladder on solid, dry, flat surface
- ▶ Level with ladder legs or stable platform
- ▶ Use slip resistant shoes on the ladder
- ▶ If accessing a roof, ladder must extend at least four rungs above the surface
- ▶ **Warning:** Improper placement of ladders causes injuries




Secure The Ladder

- ▶ Tie the top and bottom of the ladder to a secure location
 - ▶ Use ladder stays if the top of the ladder must lean against a window
 - ▶ Have a person hold the ladder if you cannot secure it with ropes or straps
- 

Safe Ladder Use

- ▶ Ladder rails must extend three feet (.91 m) above the landing or secured & grab rail provided

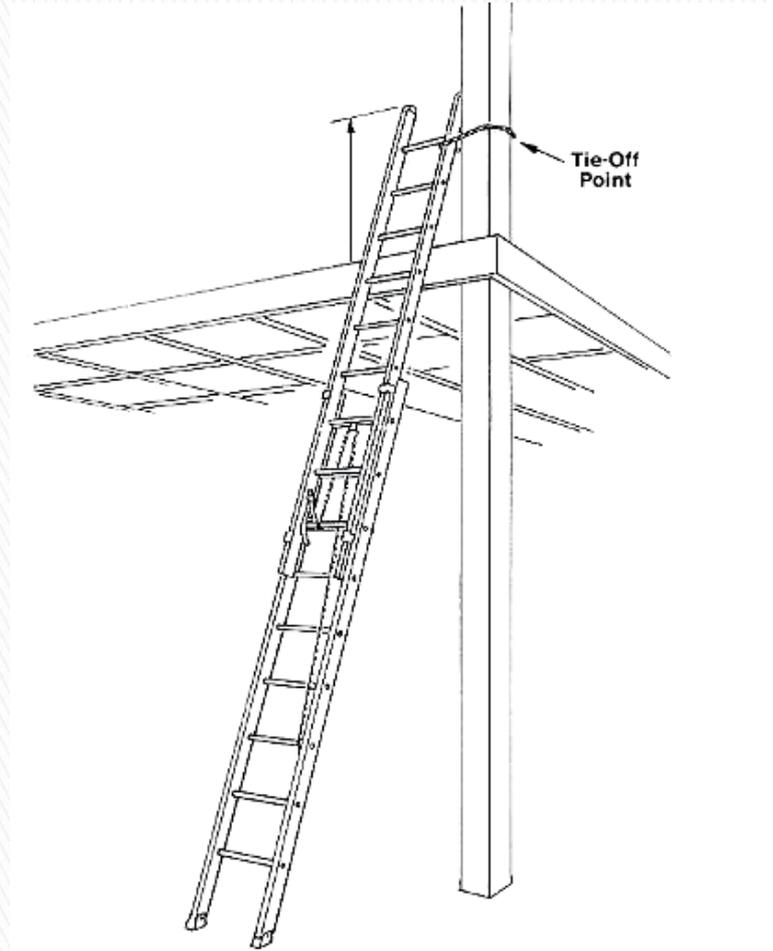

Climb Safely On a Ladder By:

- ▶ Facing the ladder and grabbing the rungs
 - ▶ Keeping your belt buckle inside the rails
 - ▶ Not carrying heavy or bulky loads
 - ▶ Draping your arms around the rungs if sick, dizzy or panicky
- 

When working around electricity:

- ▶ Do not use metal or wet wooden ladders
 - ▶ Use ladders with non-conductive side rails
 - ▶ Keep 10 feet away from electrical sources
 - ▶ Check for overhead hazards
- 

Ladder Storage

- ▶ Store ladders for easy access and inspection.
- ▶ Store vertically if possible. If not possible, store horizontally supporting ladder at several points to avoid sagging
- ▶ Protect ladder from heat, weather and corrosive materials



Ladder Storage

Do not leave ladders where they may create a tripping or fall hazard for others.

Do not leave or store ladders where they are exposed to the elements.



Three Point Contact!!!







Summary

- ▶ Most ladder accidents are the result of careless or improper ladder usage
 - ▶ Before climbing:
 - Always inspect a ladder for damage
 - Secure the ladder if unstable or unsafe
 - ▶ As a guide, always keep your belt buckle inside the rails of the ladder
- 

Click the link below to complete the Ladder Safety Quiz and then click submit.



[Ladder Safety Quiz](#)

