

LAYOUT NOTES

- IMMEDIATELY PRIOR TO RUBBERIZED SURFACING APPLICATION, EXISTING POROUS ASPHALT SHALL BE THOROUGHLY CLEANED OF ALL DIRT, DEBRIS OR ANY OTHER SUBSTANCES THAT WILL BE DETRIMENTAL TO THE INSTALLATION. ALL SURFACES TO BE VACUUMED WITH A COMMERCIAL HEAVY DUTY UNIT AND PRESSURE WASHED.
- FINISH SURFACE PLANARITY OF THE ASPHALT BENEATH THE RUBBERIZED SURFACING SHALL NOT DEVIATE MORE THAN 1/8" WHEN MEASURED WITH A 10 FOOT STRAIGHT EDGE IN ALL DIRECTIONS.
- PRIOR TO APPLICATION OF PRIMER TO POROUS ASPHALT, THE PERMEABILITY SHALL BE INSPECTED BY THE ENGINEER AND MUST BE APPROVED BEFORE ANY SURFACE APPLICATION OF TRACK SURFACING. CONTRACTOR SHALL ARRANGE FOR HOSE AND COUPLERS.
- APPLY SUCH PRIMING MATERIAL AS MAY BE NECESSARY TO ASSURE COMPLETE BOND OF POLYURETHANE RUBBERIZED TRACK AND FIELD EVENT SURFACING TO THE EXISTING POROUS ASPHALT PAVING.
- CONTRACTOR SHALL PROTECT ALL ADJACENT AREAS FROM ANY CONTAMINATION OR OVER SPRAY FROM RUBBERIZED SURFACING INSTALLATION PROCEDURES. TAPE PLASTIC SHEETING TO EDGING OR ADJACENT EXPOSED ASPHALT OR CONCRETE PAVING TO PROTECT FIELD SURFACING, ADJACENT AREAS AND STRUCTURES INCLUDING FENCING & BLEACHERS.
- AFTER INSTALLATION OF THE NEW RUBBERIZED SURFACING THE CONTRACTOR SHALL SCHEDULE A PERMEABILITY TEST WITH THE ENGINEER. THE CONTRACTOR SHALL PROVIDE QUICK COUPLERS AND HOSE AS REQUIRED FOR THE TEST. THE CONTRACTOR SHALL NOT PROCEED WITH THE STRIPING UNTIL THE PERMEABILITY TEST HAS BEEN APPROVED BY THE ENGINEER.
- THE CONTRACTOR WILL BE RESPONSIBLE FOR LOCATING THE EXISTING RADIUS POINTS UNDER THE EXISTING SYNTHETIC TURF FIELD. THE CONTRACTOR SHALL BE RESPONSIBLE FOR GLUING AND REPAIRING THE SUPPLEMENTAL PAD AS REQUIRED FOR ACCESS TO THE EXISTING RADIUS POINT MONUMENTS.

- (INDICATES GENERAL CONSTRUCTION NOTE)
- (INDICATES SPECIFIC CONSTRUCTION KEYNOTE)

- FURNISH AND INSTALL COMPLETE TRACK AND FIELD EVENT LINES AND MARKINGS TO MATCH EXISTING.
- REMOVE AND DISPOSE OF EXISTING TAKE-OFF BOARDS DURING NEW SURFACE INSTALLATION, NEW BOARDS TO BE PROVIDED. MATCH EXISTING IN SIZE AND SURFACE COLORING.
- PRIOR TO TESTING, MANUFACTURING AND SHIPMENT OF SYNTHETIC TURF MATERIAL, CONTRACTOR SHALL FIELD VERIFY SYNTHETIC TURF SURFACING DIMENSIONS TO MATCH EXISTING FIELD. SEE SYNTHETIC TURF COMPOSITE LAYOUT PLAN FOR SYNTHETIC TURF LINES AND MARKINGS.
- PRIOR TO INSTALLATION OF ANY IMPROVEMENTS, CONTRACTOR SHALL ACCURATELY SURVEY AND FIELD CONFIRM THE LOCATIONS OF FOOTBALL GOAL POSTS.
- FURNISH AND INSTALL 1 SOCCER GOAL GROUND ANCHORS WITH TURF COVER FOR EACH SOCCER GOAL. EXACT LOCATION SHALL CONFORM WITH BACKSTAY LOCATION OF SOCCER GOALS.
- EXISTING FOOTBALL GOAL POSTS TO BE REFURBISHED WITH NEW PAINT. FURNISH AND INSTALL NEW UPRIGHT PLAGS. REINSTALL GOAL POSTS AFTER PAINTING. ADJUST EXISTING GOAL POSTS TO PRODUCE 10'-0" CLEARANCE FROM SURFACE OF NEW SYNTHETIC TURF INFILL AND ALIGN WITH FOOTBALL FIELD.
- TRACK SURFACING COLORS - TRACK SURFACING COLOR TO BE RED, WITH WHITE LINES AND WHITE NUMBERS.


LAYOUT LEGEND

- INFILLED SYNTHETIC TURF OVER EXISTING ELASTIC LAYER PAD
- RUBBERIZED SURFACING OVER EXISTING POROUS ASPHALT PAVING
- RESPRAY EXISTING RUBBERIZED SURFACING
- RUBBERIZED SURFACING OVER EXISTING PEA ROCK / URETHANE PAVING
- JUMP PIT SAND
- EXISTING BALL CONTROL NETTING
- COMBOX, BID ALT 1
- EXISTING EDGE ANCHOR
- HANDHOLE

REVISION	DATE



RENTON MEMORIAL STADIUM FIELD & TRACK IMPROVEMENTS

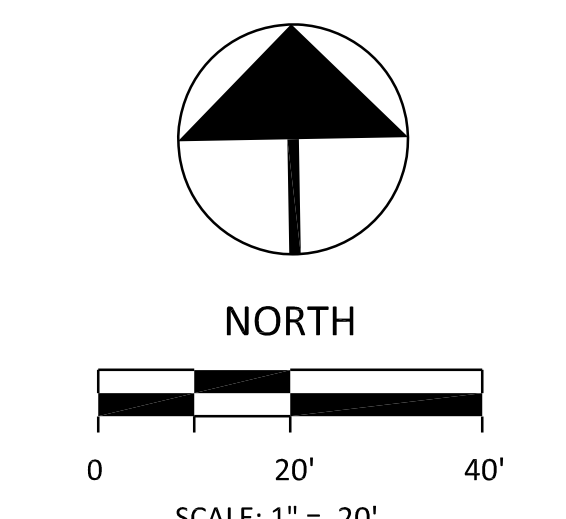

PRICING SET	
DATE	12-30-19
SCALE	1"=20'
DRAWN	CPW/ REF
CHECKED	EIG
COPYRIGHT © 2019 D.A. HOGAN & ASSOCIATES	

LAYOUT PLAN

File: F-0.1 Renton Memorial Stadium CURREN 30x42.dwg Plotted by: reneef Date: 30-Dec-19 10:05:56am