

NOT USED
ALL DAY -
only
intermittent

- NEEDS A/V + POWER DIST.
- MORE STORAGE IF POSSIBLE
- MORE COUNTER TOPS
- A SECOND. SINK
- (N) RESIL. FLOORING

FOR
"FOS" BOXES

Shade

ITEM. STAFF

Pre Sch. spch

WCDC

LINCOLN AVENUE

BASEBALL DIAMOND
EXISTING TO REMAIN

EXISTING PLAYING FIELD
EXISTING TO REMAIN

EXISTING PLAY AREA
EXISTING TO REMAIN

CHESTNUT STREET









EXISTING CHURCH

SANTA CLARA AVENUE


KEYNOTES

- | | |
|-------|--|
| 03.02 | PATCH ASPHALT PAVING AS REQUIRED SEE, CIVIL DRAWINGS |
| 02.09 | DIRECTIONAL SIGNAGE P.O.T., SEE 20/5A2.33 |
| 02.13 | CHAINLINK FENCE AND GATES W/ ACCESSIBLE HARDWARE, SEE 11/5A1.03
MATCH EXISTING LAYOUT |
| 02.15 | EXISTING FIRE HYDRANT |
| 02.19 | ACCESSIBLE PARKING ENTRANCE SIGNAGE, SEE 06/5A1.03 |
| 02.21 | PLANTING AREA TO REMAIN |
| 02.30 | EXISTING ASPHALT PAVING TO RECIEVE NEW TOP COAT AND STRIPING |
| 02.32 | NEW ORNAMENTAL FENCING AND GATE, MATCH EXISTING |
| 02.33 | REMOVE AND REPLACE EXISTING CHAINLINK FENCE FABRIC AND EMERGENCY ACCESS GATE
SEE DETAILS 16 AND 19/5A1.03. RE-USE EXISTING FENCE POST ADD POSTS ONLY
WHERE REQUIRED FOR GATES. REPLACE 6 EXISTING POSTS PER DETAIL 24/5A1.03 |
| 03.02 | EXTERIOR CONCRETE PAVING, SEE CIVIL DRAWINGS |
| 03.05 | CONCRETE PAVING |
| 03.17 | EXISTING CONCRETE PAVING |
| 05.11 | ATTACH HANDRAIL TO EXISTING PIPE RAILING, MATCH EXISTING MATERIAL -- PAINT
SEE, 04/5A1.03 |
| 06.19 | EXISTING BARK PLAY AREA TO REMAIN (PROTECT IN PLACE) |
| 10.06 | CONSTRUCTION SIGN, SEE DETAIL 03/5A1.03 |
| 10.73 | PROVIDE GATE SIGNAGE WITH 1" HIGH LETTERING STATING "GATE TO REMAIN
LOCKED IN OPEN POSITION DURING SCHOOL HOURS" 60" A.F.F. |
| 15.17 | ACCESSIBLE DRINKING FOUNTAIN, SEE 10/5A1.03, 20/A9.03 FOR TYPE OF INSTALLATION |

LEGEND

- 
 CONCRETE SLAB, SEE CIVIL DRAWINGS FOR ANY ADDITIONAL
CONCRETE WORK NOT SHOWN
- 
 AC PAVING, SEE CIVIL DRAWINGS FOR ANY ADDITIONAL CONCRETE
WORK NOT SHOWN
- 
 DISPERSAL AREA - $3 \times 562 = 1686$ SQ. FT. REQUIRED AREA
- 
 PATH OF TRAVEL
- 
 EXISTING CHAIN LINK OR ORNAMENTAL FENCE/GATE TO REMAIN
- 
 ORNAMENTAL FENCE/GATE TO REMAIN U.N.O.
- 
 CHAIN LINK FENCE
- 
 RESTROOM LOCATIONS TO BE UPGRADED
 M= MEN
 W= WOMEN
 B= BOYS
 G= GIRLS
 U= UNISEXY

- Update Phy Area
- Ex Aud.



KEYNOTES

- 05.10 PROVIDE HANDRAIL FOR STAIRWAY, FOR TYPE OF INSTALLATION SEE DETAIL 09.10/549.02
- 05.12 PROVIDE STAIR WARNING STRIPE ON ALL TREADS 1" FROM FRONT OF RISER
SEE DETAIL 16/549.03
- 06.02 CASEWORK W/ ACCESSIBLE SINK, SEE 02.04/549.03
- 06.25 PLASTIC LAMINATE CASEWORK
- 08.15 REPLACE DOOR AND PROVIDE FILL PANEL IN EXISTING FRAME, SEE DOOR SCHEDULE AND DETAIL 14/549.02
- 09.31 VERIFY WALL CONNECTION IN EXISTING WALLS
- 10.37 PROVIDE STAIRWAY IDENTIFICATION SIGNAGE, SEE DETAIL 16/542.33
- 10.75 EXIT SIGN SIMILAR TO 149/542.33 STATING "TO EXIT"
- 10.76 EXIT SIGN SEE DETAIL 140/AS2.33
- 15.17 ACCESSIBLE DRINKING FOUNTAIN, SEE 10/541.03, 20/49.03 FOR TYPE OF INSTALLATION
- 06.98 CASEWORK W/ COUNTERTOP, REINSTALL (E) DRAWER, PROVIDE COUNTERTOP.

SEE ~~REVISION~~ FOR WALKER DUCT & DATA POLE
Room # 247

FINISH LEGEND

- (C1) CARPET (FIELD) C&A #48006 GRAYON - FIREFLIES
- (C1) CARPET (ACCENT) C&A #448003 GRAYON - BUZZARD BLUE
- (V1) VINYL COMPOSITION TILE (FIELD) ARMSTRONG - #51908 PEWTER
- (V2) VINYL COMPOSITION TILE (ACCENT) ARMSTRONG - #51943 CAYENNE RED
- (V3) VINYL COMPOSITION TILE (FIELD) MATCH (E) ADJACENT CORRIDOR 5, OR 259.
- (FRP) FIBERGLASS REINFORCED PANEL - MARLITE - SILVER P-145
- (P1) PAINT (FIELD) COLOR - IC1 #655 SANTA'S BEARD
- (P2) PAINT (ACCENT) - IC1 #1468 BRISTOL
- (P3) PAINT (FIELD) CORRIDOR ACCENT - IC1 #126 GOODWIN COUNT
- (B1) 4" RUBBERBASE - ARMSTRONG #81 GRAPHITE GRAY
- (SC) SEALED CONCRETE

CERAMIC TILE IS NOT INDICATED, REFER TO CDD #M02-R FOR COLORS

WALL TYPE LEGEND

- EXISTING 1 HR RATED WALLS TO REMAIN
- NEW 1 HR RATED WALL




SYMBOL LEGEND

- Φ F.E. SURFACE MOUNTED FIRE EXTINGUISHER
- EXISTING RECESSED FIRE EXTINGUISHER
- SHADED AREAS INDICATE CASEWORK, REFER TO INTERIOR ELEVATIONS
- SHADED AREAS INDICATE CHANGE IN MATERIALS

GENERAL NOTES

- VERIFY LIMIT OF DEMO WORK ON ALL CASEWORK TO ENSURE A CLEAN MODULE CUT.
- PATCH AND REPAIR AFFECTED AREAS ON FLOOR, WALL AND CEILING DURING DEMOLITION TO MATCH EXISTING ADJACENT SURFACES.
- REMOVE AND REPLACE EQUIPMENT, FIXTURES AND OTHER ITEMS NEEDED FOR RENOVATION OR REFINISH WORK. PROTECT IN PLACE ANY ITEMS NOT BEING REMOVED FOR RENOVATION.
- TURN OVER TO THE DISTRICT ANY SALVAGEABLE EQUIPMENT, FIXTURES, CASEWORK, BUILDING ACCESSORIES, ETC. REMOVED DURING DEMOLITION, AND NOT TO BE REINSTALLED/USED IN THE MODERNIZATION. PROPERLY DISPOSE FROM SITE ITEMS NOT ACCEPTED BY THE DISTRICT.
- PROVIDE STAIR IDENTIFICATION SIGNAGE IN STAIRWAYS, SEE DETAIL 16/542.33
- REFER TO ELECTRICAL DRAWINGS FOR ELECTRICAL PROJECT SCOPE.
- SEE FIXTURE MOUNTING HEIGHTS SEE 4/49.02
- REFER TO MECHANICAL & PLUMBING DRAWINGS FOR ALL MECHANICAL AND PLUMBING PROJECT SCOPE.
- ALL ROOMS AFFECTED BY SCOPE OF CONSTRUCTION FROM THIS APPLICATION NUMBER OR A#02-106890 TO RECEIVE PAINT P-1 AT ALL WALLS UNLESS:
- (E) FLOOR DRAIN(S) TO REMAIN TYPICAL.

KEYPLAN

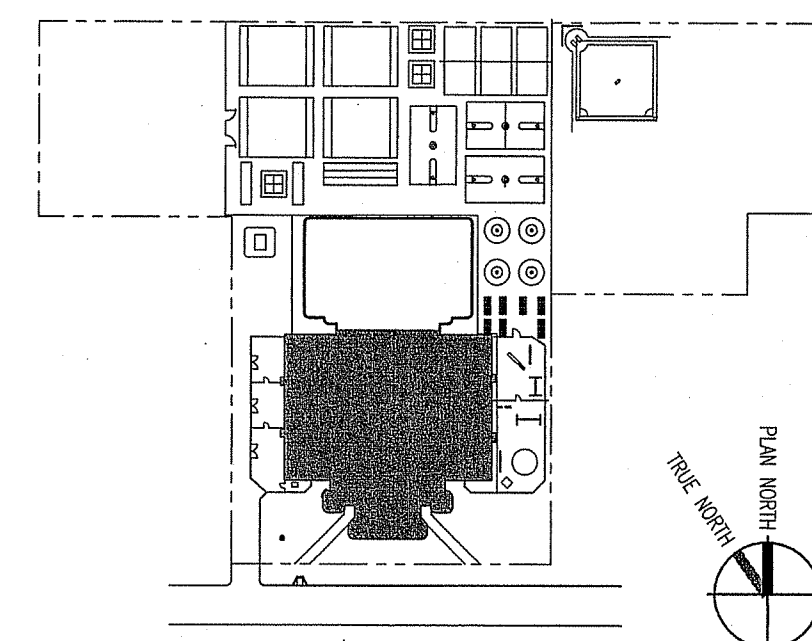

SPACE USE / OCCUPANT LOAD SCHEDULE

NO.	SPACE USE	OCCUPANT LOAD FACTOR SF/OCCUPANT
01	ASSEMBLY AREA - CONCENTRATED USE	7
02	ASSEMBLY AREA - LESS CONCENTRATED USE	15
03	MECHANICAL EQUIPMENT ROOM	100
04	ELECTRICAL EQUIPMENT ROOM	100
05	OFFICE	100
06	CLASSROOM	20
07	ALL OTHERS	100
08	KITCHEN	50
09	STORAGE	300
10	EXERCISE ROOM	50
11	LOCKER ROOM	50


EXITING ANALYSIS NOTES

- OCCUPANCY LOAD FACTORS ARE PER CBC (UBC) SECTION 1003 TABLE 10-A
- ACCESSORY USE AREA EXCLUDED FROM OCCUPANT LOADING, CBC SECTION 1003.2.2.1 EXCEPTION

EXITING ANALYSIS LEGEND


- LOBBY
- E1 06 LOBBY = ROOM NAME
- 900 SF LOBBY = ROOM NAME
- 45 Y/N E1 = OCCUPANCY GROUP
- {50} 06 = SPACE USE - REFERENCE SPACE USE/LOAD SCHEDULE ABOVE
- 900 = FLOOR AREA - SQUARE FEET
- 45 = OCCUPANT LOAD (CBC TABLE 10-A)
- Y/N = OCCUPANT LOAD SIGN REQUIRED WHEN NOTED SEC 1003.2.2.5 - REF SIGNAGE SCHEDULE. LOCATE A SIGN NEAR THE MAIN EXIT FROM THE ROOM
- {50} = OCCUPANT LOAD PLUS ANCILLARY SPACE WHERE OCCURS

120 24" PATH OF EGRESS, OCCUPANT LOAD SERVED BY OPENING AND EXIT WIDTH PER PERSON SERVED

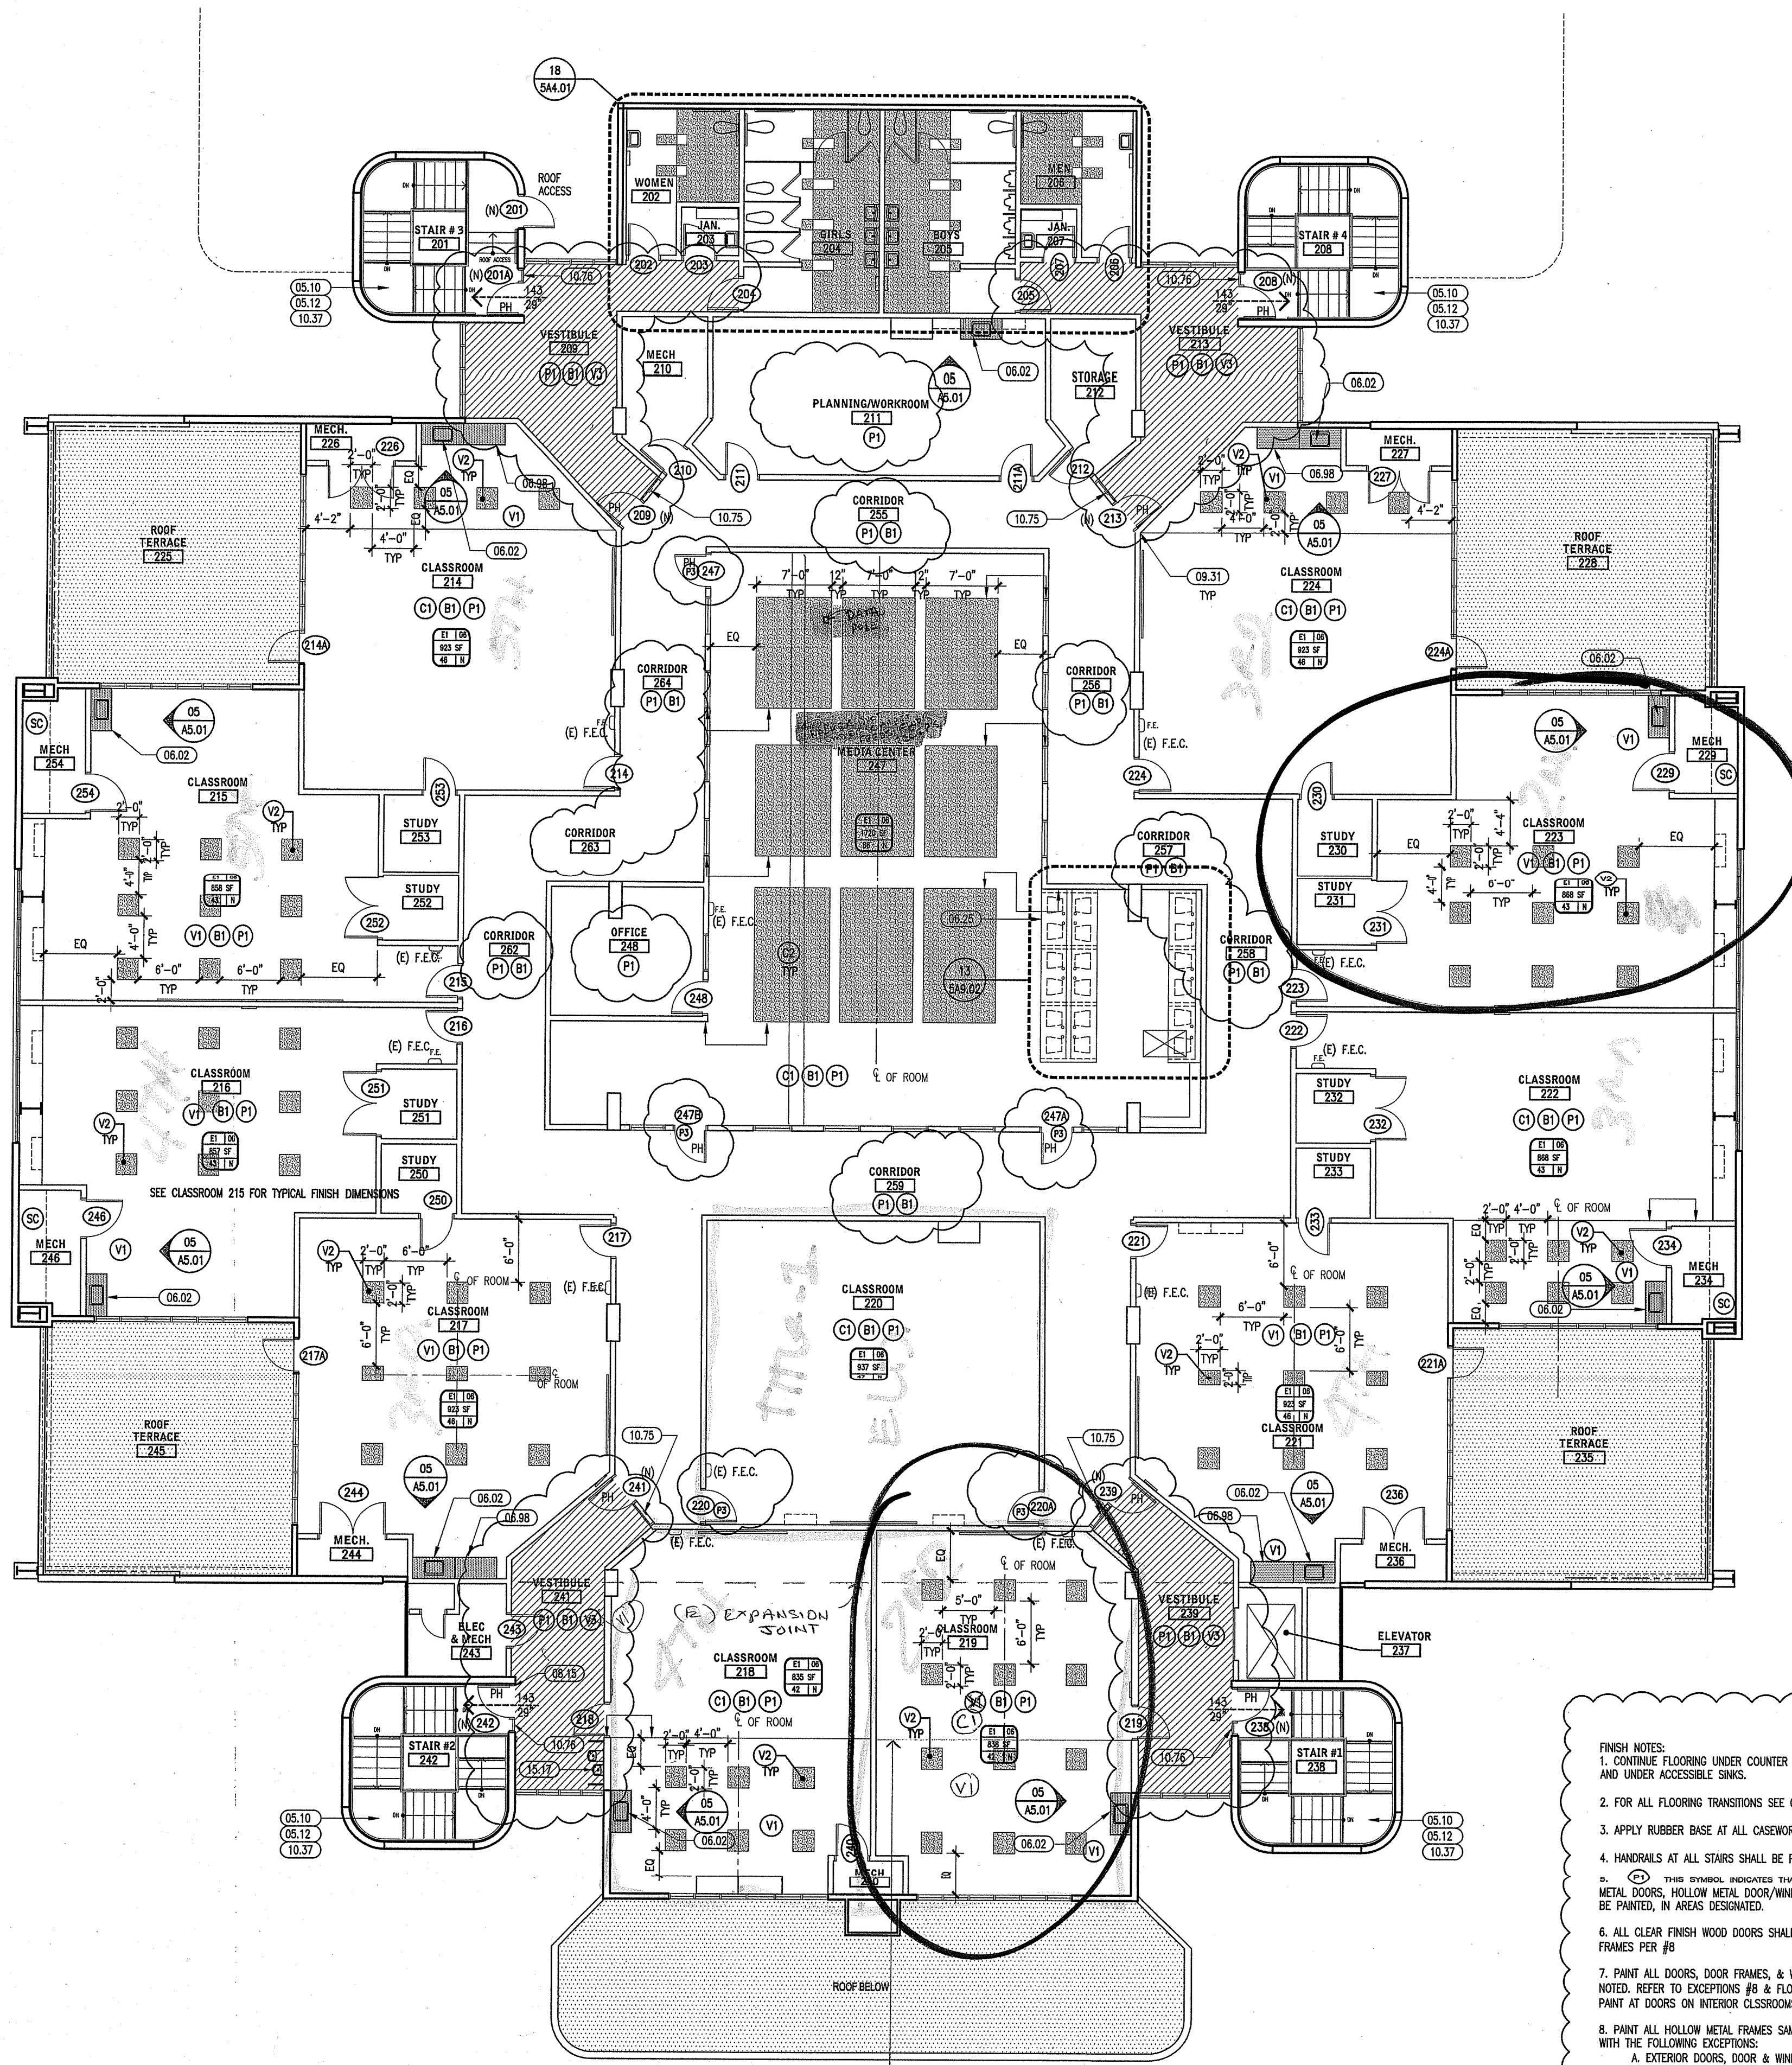

- FINISH NOTES:
- CONTINUE FLOORING UNDER COUNTER WHERE BASE CABINETS ARE NOT SHOWN AND UNDER ACCESSIBLE SINKS.
 - FOR ALL FLOORING TRANSITIONS SEE 02/549.02
 - APPLY RUBBER BASE AT ALL CASEWORK & (E) CASEWORK
 - HANDRAILS AT ALL STAIRS SHALL BE PAINTED TO MATCH (E) STAIR STRINGER.
 - THIS SYMBOL INDICATES THAT ALL PAINTABLE WALL SURFACES, HOLLOW METAL DOORS, HOLLOW METAL DOOR/WINDOW FRAMES, & GYS. BG. CEILINGS SHALL BE PAINTED, IN AREAS DESIGNATED.
 - ALL CLEAR FINISH WOOD DOORS SHALL REMAIN. NO ADDITIONAL FINISH PAINT FRAMES PER JB
 - PAINT ALL DOORS, DOOR FRAMES, & WINDOW FRAMES P-2, UNLESS OTHERWISE NOTED. REFER TO EXCEPTIONS FOR A FLOOR PLANS. (SEE DOOR 7 FOR TYPICAL PAINT AT DOORS ON INTERIOR CLASSROOMS).
 - PAINT ALL HOLLOW METAL FRAMES SAME COLOR AT INSIDE AND OUTSIDE TYPICAL, WITH THE FOLLOWING EXCEPTIONS:
 - EXTERIOR DOORS, DOOR & WINDOW FRAMES (P-2 INTERIOR EP-2 EXT.)
 - SERVICE ROOMS, PAINT IS NOT REQUIRED ON SERVICE SIDE, PAINT VISIBLE SIDE, COLOR SHALL SPLIT ON STOP TYPICAL.

MATCH ROOM #218 PER MEETING COMMENTS 4/3/07
DUE TO EXPANSION JOINT IN VCT

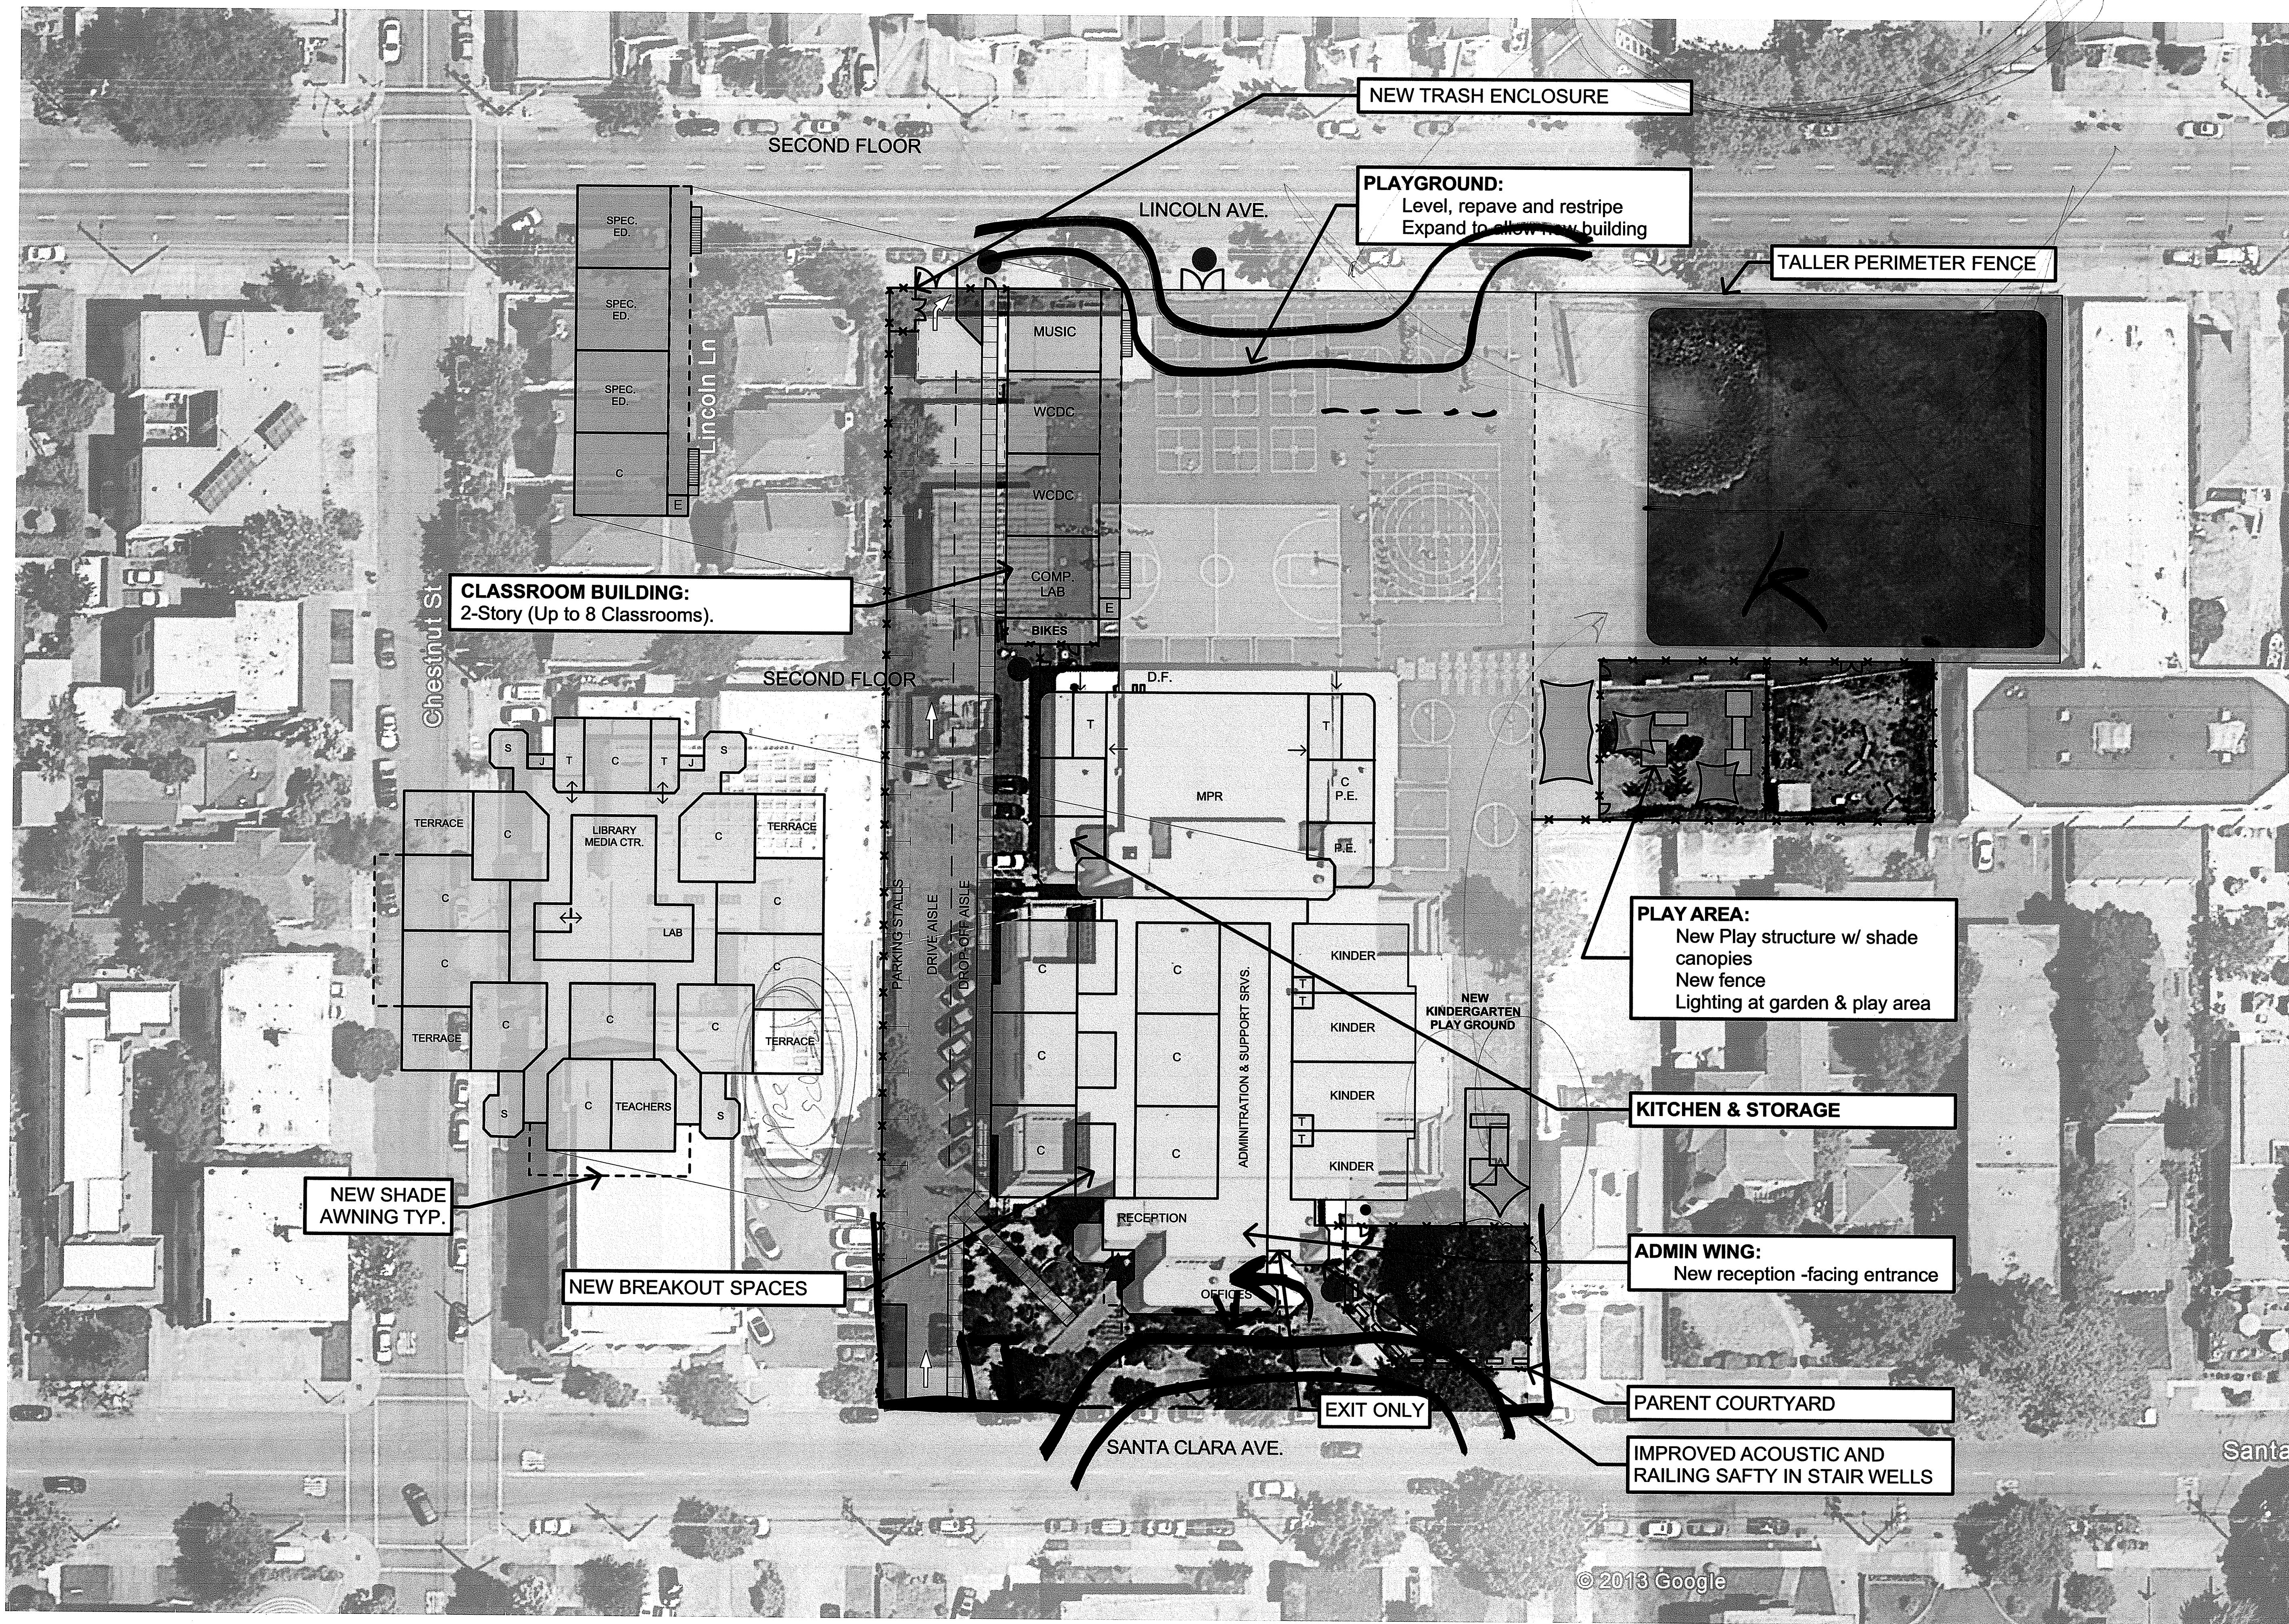

- KEY**
- NEW STRUCTURE
 - REPURPOSED/ RECONFIGURED
 - MODERNIZED
 - NEW / RECONFIGURED SITE WORK
 - NEW SHADE STRUCTURE
 - NEW LANDSCAPED AREA
 - POSSIBLE FUTURE GROWTH
 - NEW FENCE
 - DEMOLITION
 - MAIN ENTRY POINT
 - OUTER PERIMETER ENTRY POINT
 - INNER PERIMETER ENTRY POINT
 - C CLASSROOM
 - T TOILET

HENRY HAIGHT ELEMENTARY SCHOOL SITE PLAN

CCD #1 M-008 IS NOW CCD #1 M-020

KEYNOTES

- 02.31 PROVIDE ELEVATOR DIRECTIONAL SIGNAGE, SEE 17/02.33
- 03.23 PATCH EXISTING CONCRETE SLAB AS REQUIRED AND PROVIDE FINISHES TO MATCH ADJACENT SURFACES
- 05.10 PROVIDE HANDRAIL FOR STAIRWAY, FOR TYPE OF INSTALLATION SEE DETAIL 09.10/549.02
- 05.12 PROVIDE STAIR WARNING STRIPE ON ALL TREADS 1" FROM FRONT OF RISER SEE DETAIL 16/549.03
- 06.15 FILL-IN EXISTING OPENING TO MATCH EXISTING ADJACENT SURFACE
- 06.02 CASEWORK W/ ACCESSIBLE SINK, SEE 02.04/549.03
- 06.23 PROVIDE 34" HIGH ACCESSIBLE COUNTER TOP MATCH EXISTING LAMINATE COUNTER TOP FINISH
- 06.24 DUAL SWING GATE
- 06.13 2'-0" x 4'-0" ALUMINUM STOREFRONT WINDOW W/ PLASTIC GLAZING, SEE STRUCTURAL FOR NEW OPENING IN EXISTING BLOCK WALL AND DETAIL 19/549.03 FOR FRAME
- 08.15 REPLACE DOOR AND PROVIDE FILL PANEL IN EXISTING FRAME, SEE DOOR SCHEDULE AND DETAIL 14/549.02
- 09.30 METAL STUD WALL WITH GYP. BRD. PAINTED, COLOR T.B.D. SEE WALL LEGEND
- 10.34 EXISTING CHALKBOARD TO REMAIN
- 10.37 PROVIDE STAIRWAY IDENTIFICATION SIGNAGE, SEE DETAIL 16/542.33
- 10.40 EXISTING RECESSED FIRE EXTINGUISHER
- 10.48 SURFACE MOUNTED FIRE EXTINGUISHER 2A10 BC W/ TAG CERTIFICATION ATTACHED
- 10.49 INTERNATIONAL SIGN OF ACCESSIBILITY WALL SIGNAGE, SEE DETAIL 05/542.33
- 14.02 EXISTING ELEVATOR MECHANICAL ROOM BELOW
- 06.98 CASEWORK W/ COUNTERTOP, REINSTALL (C) DRAWER UNIT, PROVIDE COUNTERTOP.
- 06.99 CASEWORK W/ COUNTERTOP, REINSTALL (C) SINK IN CASEWORK.

FINISH LEGEND

- (C) CARPET (FIELD) C&A #48008 CRAYON - FIREFLIES
 - (C) CARPET (ACCENT) C&A #448003 CRAYON - BLIZZARD BLUE
 - (V) VINYL COMPOSITION TILE (FIELD) ARMSTRONG - #51908 PENTER
 - (V) VINYL COMPOSITION TILE (ACCENT) ARMSTRONG - #51943 CAYENNE RED
 - (V) VINYL COMPOSITION TILE (FIELD) MATCH (C) ADJACENT CORRIDOR 5, OR 25R.
 - (RP) FIBERGLASS REINFORCED PANEL - MARLITE - SILVER P-145
 - (P) PAINT (FIELD) COLOR - ICI #655 SANTA'S BEARD
 - (P) PAINT (ACCENT) - ICI #1468 BRISTOL
 - (P) PAINT (FIELD) CORRIDOR ACCENT - ICI #128 GOODWIN COURT
 - (B) 4" RUBBERBASE - ARMSTRONG #61 GRAPHITE GRAY
 - (SC) SEALED CONCRETE
- CERAMIC TILE IS NOT INDICATED. REFER TO CCD #002-R FOR COLORS
- WALL TYPE LEGEND



SYMBOL LEGEND

- EXISTING 1 HR RATED WALLS TO REMAIN
- NEW 1 HR RATED WALL
- SURFACE MOUNTED FIRE EXTINGUISHER
- EXISTING RECESSED FIRE EXTINGUISHER
- SHADED AREAS INDICATE CASEWORK, REFER TO INTERIOR ELEVATIONS
- SHADED AREAS INDICATE CHANGE IN MATERIALS

GENERAL NOTES

- VERY LIMIT OF DEMO WORK ON ALL CASEWORK TO ENSURE A CLEAN MODULE OUT.
- PATCH AND REPAIR AFFECTED AREAS ON FLOOR, WALL AND CEILING DURING DEMOLITION TO MATCH EXISTING ADJACENT SURFACES.
- REMOVE AND REPLACE EQUIPMENT, FIXTURES AND OTHER ITEMS NEEDED FOR RENOVATION OR REFRESH WORK. PROTECT IN PLACE ANY ITEMS NOT BEING REMOVED FOR RENOVATION.
- TURN OVER TO THE DISTRICT ANY SALVAGEABLE EQUIPMENT, FIXTURES, CASEWORK, BUILDING ACCESSORIES, ETC. REMOVED DURING DEMOLITION, AND NOT TO BE REINSTALLED/USED IN THE MODERNIZATION. PROPERLY DISPOSE FROM SITE ITEMS NOT ACCEPTED BY THE DISTRICT.
- PROVIDE STAIR IDENTIFICATION SIGNAGE IN STAIRWAYS, SEE DETAIL 16/542.33
- REFER TO ELECTRICAL DRAWINGS FOR ELECTRICAL PROJECT SCOPE.
- SEE FIXTURE MOUNTING HEIGHTS SEE 4/09.02
- REFER TO MECHANICAL & PLUMBING DRAWINGS FOR ALL MECHANICAL AND PLUMBING PROJECT SCOPE.
- ALL ROOMS AFFECTED BY SCOPE OF CONSTRUCTION FROM THIS APPLICATION NUMBER OR #002-108890 TO RECEIVE PAINT P-1 AT ALL WALLS-UNLESS
- FLOOR DRAIN(S) TO REMAIN TYPICAL.

KEYPLAN

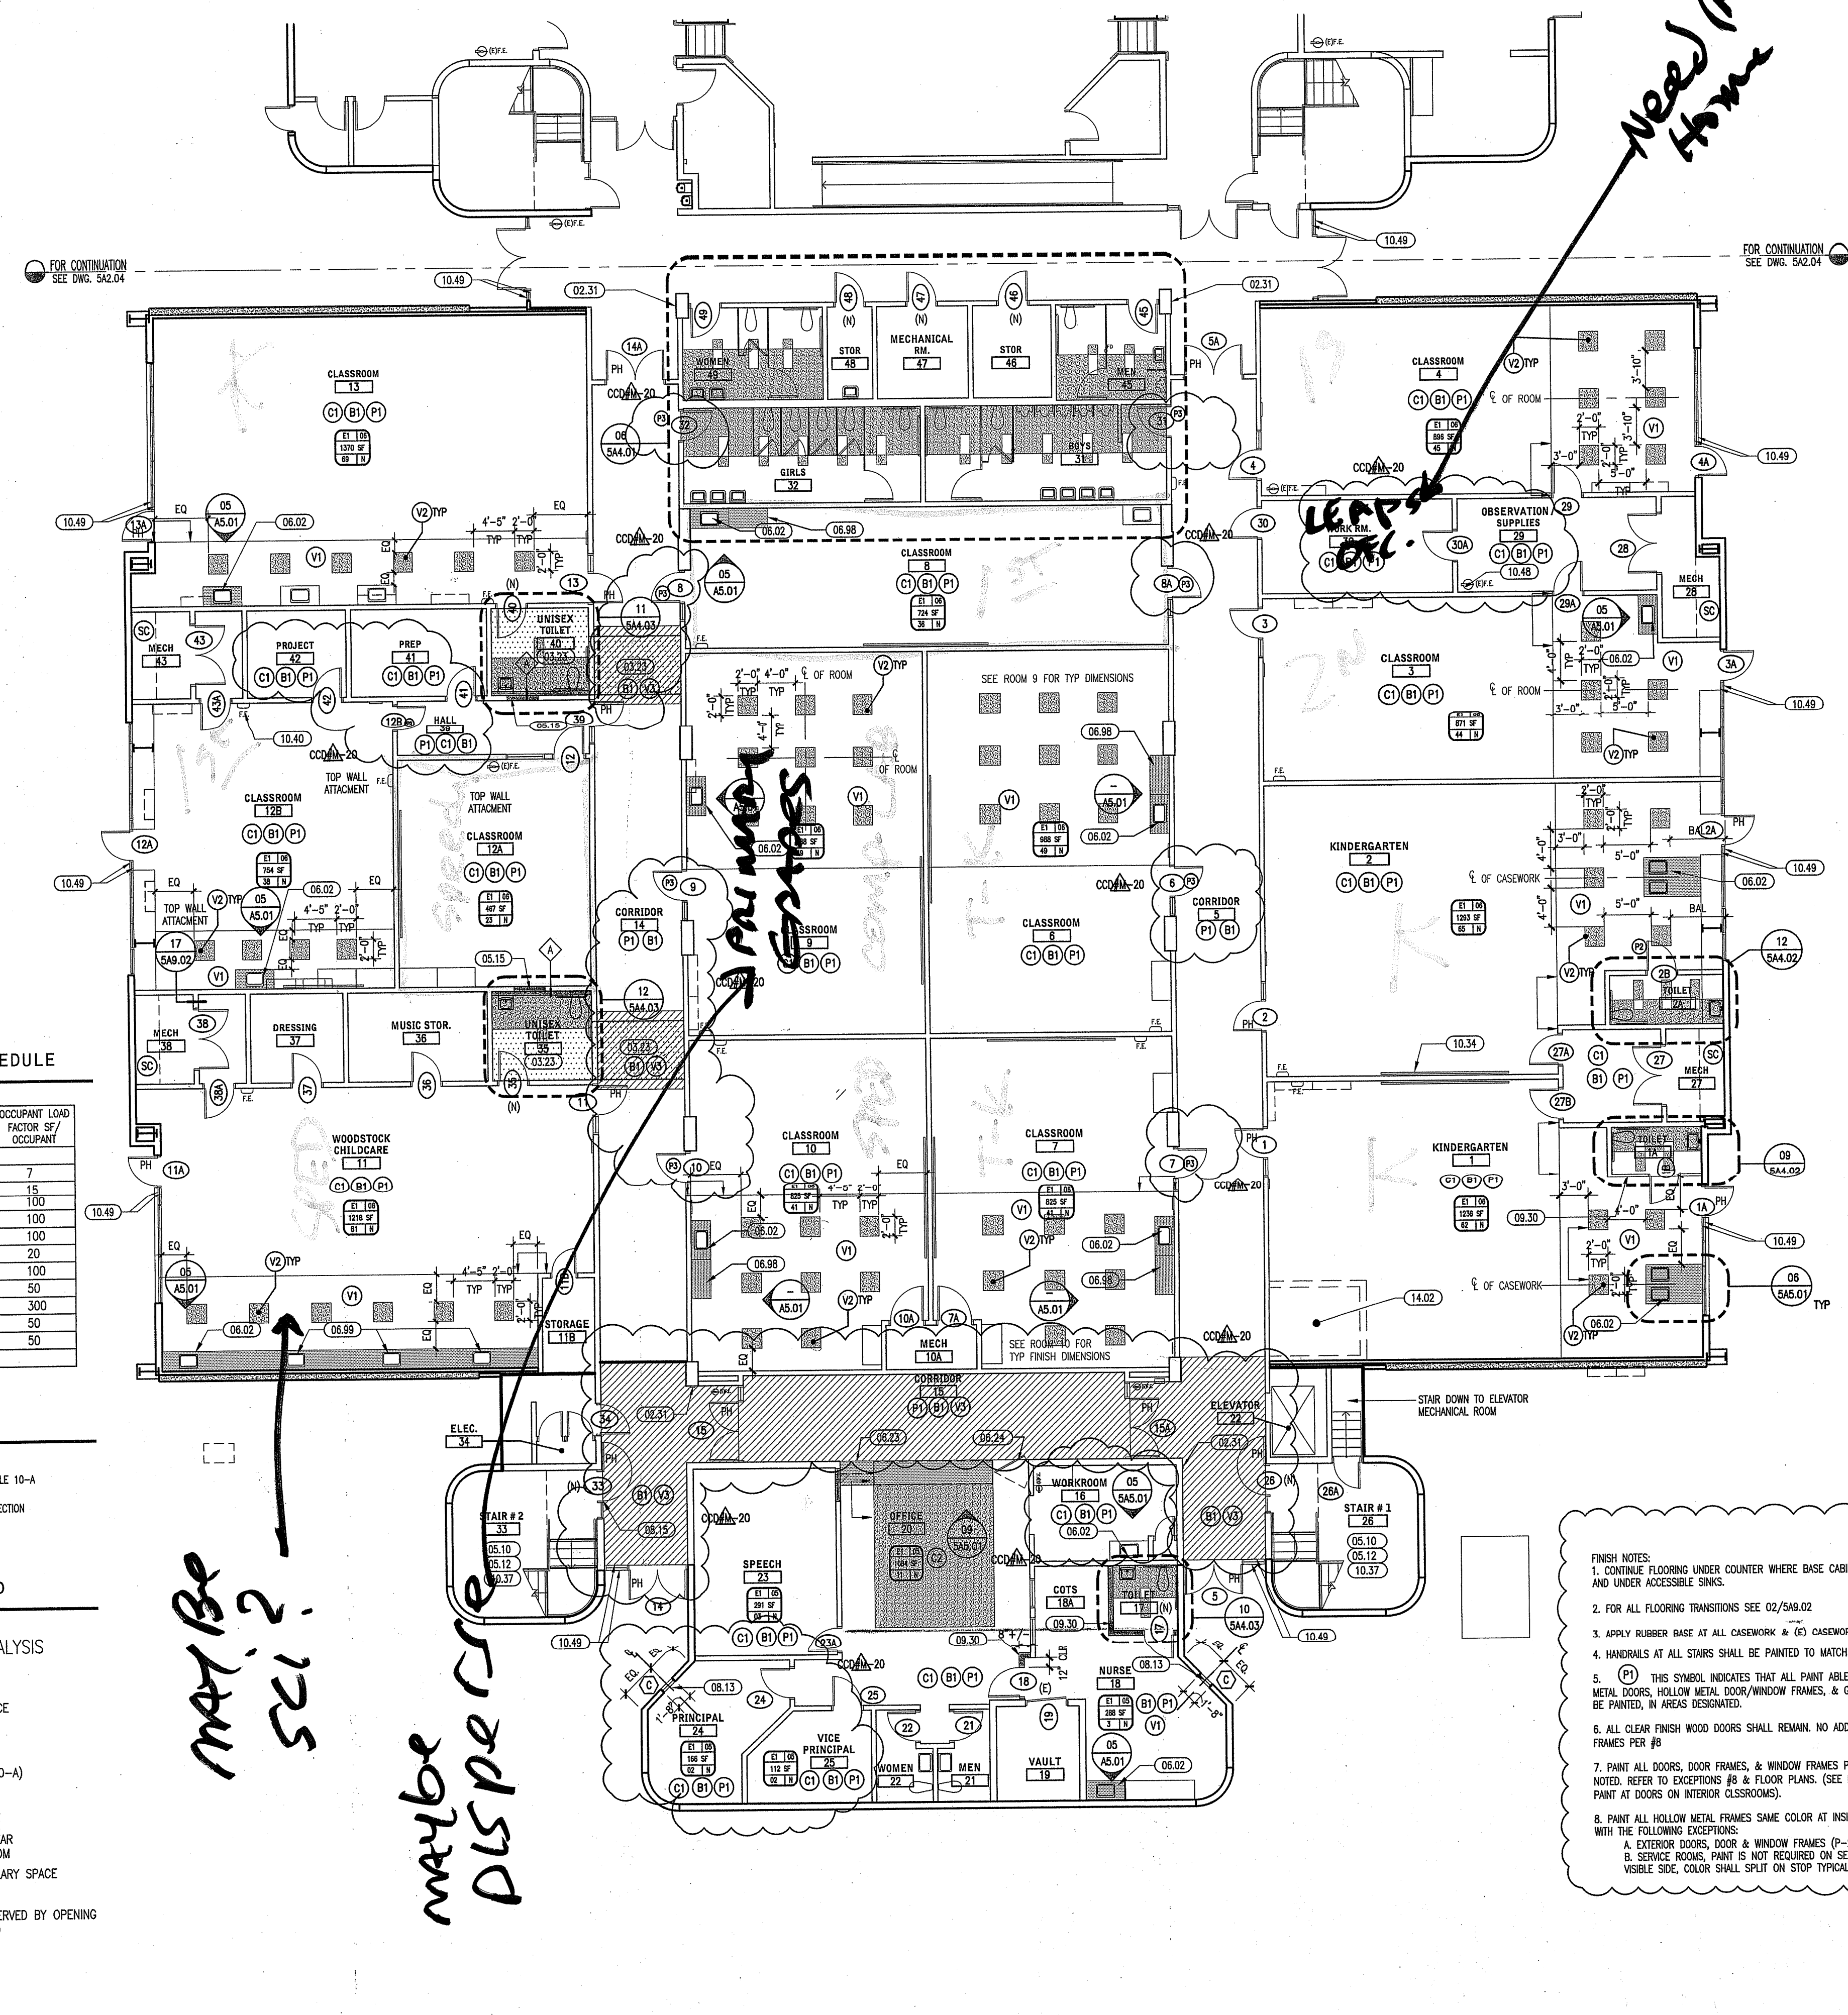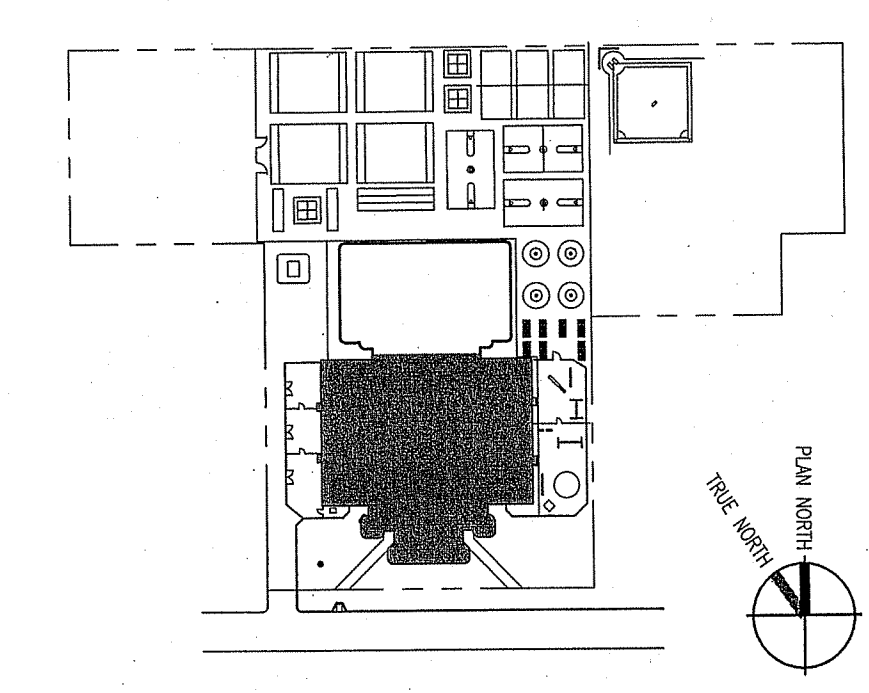

SPACE USE / OCCUPANT LOAD SCHEDULE

NO.	SPACE USE	OCCUPANT LOAD FACTOR SF / OCCUPANT
01	ASSEMBLY AREA - CONCENTRATED USE	7
02	ASSEMBLY AREA - LESS CONCENTRATED USE	15
03	MECHANICAL EQUIPMENT ROOM	100
04	ELECTRICAL EQUIPMENT ROOM	100
05	OFFICE	100
06	CLASSROOM	20
07	ALL OTHERS	100
08	KITCHEN	50
09	STORAGE	500
10	EXERCISE ROOM	50
11	LOCKER ROOM	50

EXITING ANALYSIS NOTES

- OCCUPANCY LOAD FACTORS ARE PER CBC (IBC) SECTION 1003 TABLE 10-A
- ACCESSORY USE AREA EXCLUDED FROM OCCUPANT LOADING, CBC SECTION 1003.2.2.1 EXCEPTION

EXITING ANALYSIS LEGEND

- LOBBY
E1 06
900 SF
45 Y/N
{50}
- AREA IDENTITY/ CODE ANALYSIS
LOBBY = ROOM NAME
E1 = OCCUPANCY GROUP
06 = SPACE USE - REFERENCE SPACE USE/LOAD SCHEDULE ABOVE
900 = FLOOR AREA - SQUARE FEET
45 = OCCUPANT LOAD (CBC TABLE 10-A)
Y/N = OCCUPANT LOAD SIGN REQUIRED WHEN NOTED - SEC 1003.2.8 - REF SIGNAGE SCHEDULE. LOCATE A SIGN NEAR THE MAIN EXIT FROM THE ROOM
{50} = OCCUPANT LOAD PLUS ANCILLARY SPACE WHERE OCCURS
- 120 <--- PATH OF EGRESS, OCCUPANT LOAD SERVED BY OPENING
24" AND EXIT WIDTH PER PERSON SERVED