REMOVE EXISTING GATE AND INSTALL NEW LOCKABLE GATE AT EXISTING GATE LOCATION

PROVIDE BID ALTERNATE FOR THE FENCE ALONG THIS PROPERTY LINE TO BE ORNAMENTAL FENCING IN LIEU OF CHAIN LINK

PER DIRECTION RECEIVED DURING SITE MEETING #1 RECONFIGURE RAMPS TO ALLOW FOR NEW GATES

INSTALL NEW CHAIN LINK GATE

ABUT BUILDING

ABUT BUILDING

INSTALL NEW CHAIN LINK GATES TO MATCH HEIGHT AND FINISH OF EXISTING FENCING AND MAINTAIN 20' WIDE OPENING

IN-FILL OPENING WITH NEW CHAIN LINK FENCING TO MATCH EXISTING

EXTEND FENCE LINE WITH NEW FENCING

ABUT BUILDING

ABUT BUILDING

NEW ENTRY STRUCTURE – SEE DETAIL

SEE ENLARGED SITE PLAN

ABUT AND MECHANICALLY CONNECT ORNAMENTAL TO CHAIN LINK FENCE, TYP

20' WIDE GATE FOR FIRE DEPARTMENT APPARATUS ACCESS

LEGEND

- NEW ORNAMENTAL IRON FENCE BLACK FINISH, 6-FEET TALL
- NEW CHAIN LINK FENCE BLACK FINISH, 6-FEET TALL
- EXISTING FENCE TO REMAIN
- MAIN ENTRY
- NEW GATE ACCESS LOCATION WITH LOCKABLE HASPS
- EXISTING GATE ACCESS
- DEMOLISH EXISTING FENCE AND REPLACE WITH NEW FENCE AS INDICATED

NOTE:
POST INSTALLATION AND SPACING AS RECOMMENDED BY MANUFACTURER

ALL GATE HEIGHT TO MATCH ADJACENT FENCE HEIGHT, U.O.N.


NORTH




EXAMPLE OF ORNAMENTAL FENCE



EXAMPLE OF
CHAIN LINK, BLACK FINISH FENCE

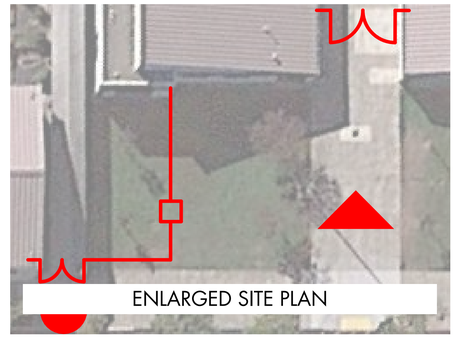

ENLARGED SITE PLAN

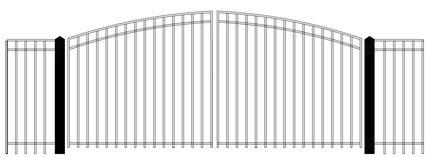

NEW ENTRY STRUCTURE SCHEMATIC DESIGN

NEW FENCING SITE PLAN - BAY FARM ELEMENTARY SCHOOL

ALAMEDA UNIFIED SCHOOL DISTRICT
Wednesday, April 12, 2017
1580.00

QUATTROCCHI KWOK ARCHITECTS