


Adelante Academy Asphalt Repair and Replacement
2999 Ridgemont Dr.

SCOPE OF WORK



- TASK 1 FRONT PLAY AREA (KINDERGARTEN), APPROXIMATELY 3,800 SQ. FT
- Remove and replace degraded asphalt overlay. Install wood header board at existing undefined edge of asphalt. Repaint existing playground designs with similar colors and layouts.
- TASK 2 CENTRAL PLAY AREA (UNDER NEW SHADE STRUCTURE), APPROXIMATELY 6,500 SQ. FT.
- Remove and replace asphalt. Repaint existing playground designs with similar colors and layouts. Patch/Repair around new shade structure columns - remobilization required.
- TASK 3 REAR PLAY AREA- APPROXIMATELY 10,000 SQ FT.
- Repair existing asphalt. Mill and overlay AC. Repaint playground designs with similar colors and layouts. Install wood headerboard as needed.

Details

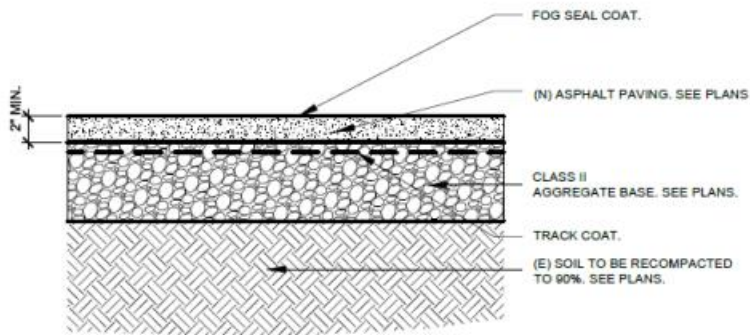

NOTE:
1. INSTALL REDWOOD HEADER BOARD AT PERIMETER OF ASPHALT PAVING WHERE ASPHALT DOES NOT ABUT A HARD SURFACE. REFER TO HEADER BOARD @ ASPHALT PAVING DETAIL 3/-.

1 ASPHALT PAVING N.T.S

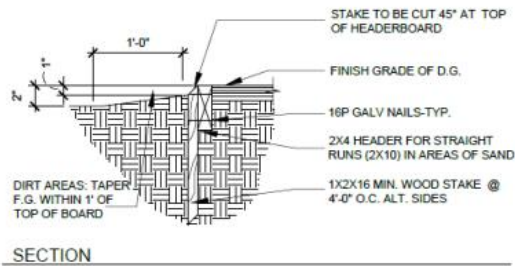

NOTE:
1. ALL WOOD TO BE ROUGH SAWN PRESSURE TREATED DOUGLAS FIR.

PLAN VIEW

2 WOOD HEADERBOARD N.T.S



Structure Pricing

Adelante

DSA401J303012-16 Joined Hip 30'x60' Max 12'e Max				
UNIT IMAGE	UNIT DETAILS			
	Unit Quantity	1	Foundations By	USA Shade
	Unit Type	Hip Joined	Ground Installation	Not Applicable
	Structure Size	30'x60' Max	Footing Type	Drilled Pier
	USA Shade Model Number	DSA401J303012-16	Base Attachment	PIH - Embed
	Entry Height	12'	Anchor Bolts	N/A
	No. of Columns	6	Concrete Cutting	Included
	No. of Fabric Tops	2	Dirt Removal	Included
	Fabric Type	Colourshade_FR	Surface Type	Asphalt/Concrete
	Fabric Color	TBD	NOTES Pricing based on two DSA401303012-16 units from Fullerton contract.	
	Steel Finish	Coastal Primer w/ Powder Coating		
PRICE		TBD		
See below	Electrical Provisions	N/A		
	Cable/HDW Finish	Galvanized		
	Concept No.			

