

Russo/McEntee Academy Asphalt Repair and Replacement
2851 Gay Ave.

SCOPE OF WORK


TASK 1 CENTRAL PLAY AREA AT DRAIN -APPROXIMATELY 1,200 SQ. FT

Remove and replace asphalt. Repaint play design in kind.

TASK 2 CENTRAL PLAY AREA - APPROXIMATELY 28,000 SQ. FT.

Repair asphalt: Grind and overlay. Repaint play design in kind.


Details

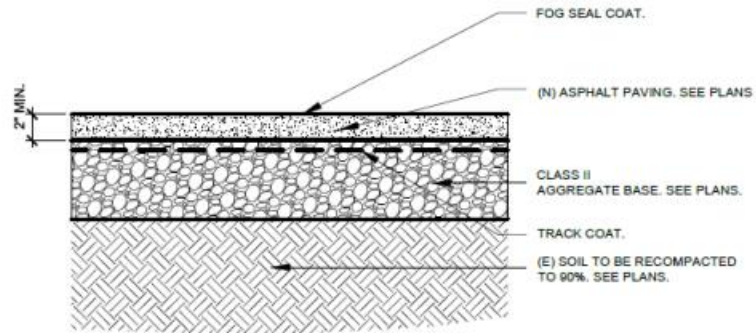


NOTE:

1. INSTALL REDWOOD HEADER BOARD AT PERIMETER OF ASPHALT PAVING WHERE ASPHALT DOES NOT ABUT A HARD SURFACE. REFER TO HEADER BOARD @ ASPHALT PAVING DETAIL 3/-.

1 ASPHALT PAVING N.T.S

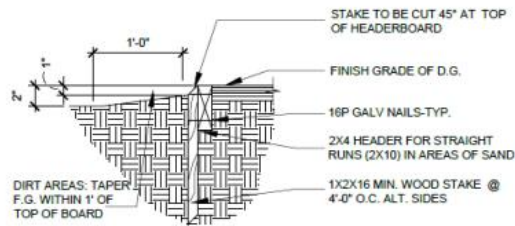

SECTION

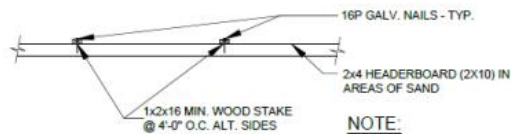

PLAN VIEW

NOTE:

1. ALL WOOD TO BE ROUGH SAWN PRESSURE TREATED DOUGLAS FIR.

2 WOOD HEADERBOARD N.T.S



**Russo/McEntee Academy
REPAIR AND REPLACEMENT
ASPHALT SITE MAP
2851 Gay Ave.**

**Task 1: Central Play Area at
drain: Replace asphalt
around central drain.
Approximately 1200 SQ FT.
Repaint painted designs**

**Task 2: Repair Asphalt-
Grind and Overlay: 28,000
SQ FT., Repaint Play
Area**

1,183 sf

31,387 sf