

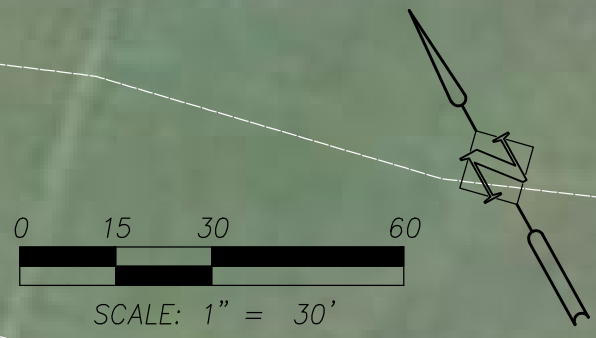



DUGOUTS:
Maintain existing. Add
fencing and gates in front
of dugouts. Potentially add
step down to field level.

FIELD:
Lower entire field
elevation.






- (1) REMOVE EXISTING NATURAL TURF
- (2) INSTALL SYNTHETIC TURF SURFACE AND DRAINAGE BASE AT INFIELD
- (3) EXISTING PRESS BOX TO REMAIN. PAINT EXTERIOR SIDING, REPLACE ASPHALT SHINGLE ROOF. INSTALL GYPSUM BOARD AT INTERIOR EXPOSED STUD WALL FRAMING.
- (4) REPLACE EXISTING WOOD BLEACHER SEATS WITH ALUMINUM PLANKS, 10 ROWS X 30' (200 SEATS). REUSE EXISTING STEEL UNDERSTRUCTURE.
- (5) REGRADE OUTFIELD AND INSTALL SUBSURFACE DRAINAGE
- (6) INSTALL SUBSURFACE DRAINAGE AT INFIELD PERIMETER
- (7) REPLACE OUTFIELD FENCE AS NEEDED FOR REGRADED AREAS
- (8) REPLACE EXISTING LIGHTING WITH LED FIXTURES
- (9) EXISTING HITTING FACILITY TO REMAIN AS IS
- (10) REPLACE CHAIN LINK AND ADD PROTECTION PADDING AT BACKSTOP
- (11) REPLACE EXISTING SCOREBOARD
- (12) INSTALL CONCRETE STEP AT DUGOUT
- (13) EXISTING SIDE BLEACHERS TO REMAIN. REPLACE END CAPS AS NEEDED.



- (A) REPLACE EXISTING PRESS BOX WITH NEW 12'X8' PRESS BOX INTEGRAL WITH BLEACHERS
- (B) REPLACE EXISTING TICKET BOOTH WITH NEW 216 SF TICKET BOOTH
- (C) REPLACE EXISTING TICKET BOOTH AND PRESS BOX WITH NEW TWO-STORY 432 SF TICKET BOOTH WITH PRESS BOX ABOVE
- (D) INSTALL VENTILATION FANS AND EPOXY FLOOR COATING TO EXISTING RESTROOMS
- (E) REPLACE ENTIRE BLEACHER ASSEMBLY BEHIND HOME PLATE WITH 121 SEATS INCLUDING 2 ADA SPACES AND 48" CENTER AISLE, FIXED TO CONCRETE FOUNDATION.
- (F) NEW ALUMINUM BLEACHER ASSEMBLY, 40 SEATS AT EACH BASE LINE, INCLUDING 2 ADA SPACES, FIXED TO CONCRETE FOUNDATIONS.
- (G) REPLACE DRINKING FOUNTAIN

1. REGRADING OF FIELD
2. TURF INFIELD
3. PRESS BOX
4. LIGHTING
5. SEATING
6. SCOREBOARD



REX PUTNAM HS FIELD IMPROVEMENTS

 **Harper
Houf Peterson
Righellis Inc.**

ENGINEERS • PLANNERS
LANDSCAPE ARCHITECTS • SURVEYORS

205 SE Spokane Street, Suite 200, Portland, OR 97202
phone: 503.221.1131 www.hhpr.com fax: 503.221.1170

[illegible]

SHEET NO.

L1.0

JOB NO.	
---------	--

NCS-30

