

Collins Architectural Group, p.s.
950 12th Avenue, Suite 200
Longview, WA 98632

Addendum No. 2

Page No. 1 of 3

Date: January 26, 2023

Project: Longview District No. 122
VESTIBULE SECURITY PROJECT PHASE II
Project Number 2021-18
Longview, WA

Notice to Contractor:

The following changes in the Contract Documents, including the Drawings and Specifications, constitute this Addendum. All changes included in Addenda shall become a part of the Contract Documents for this Project. Any changes herein offset only the specific Drawings or Notes on Drawings or words or paragraphs in Specifications referenced to and the balance of the Drawings shall remain in full force.

ARCHITECTURAL SPECIFICATION

<u>ITEM</u>	<u>SHEET NO./ SECTION NO.</u>	<u>DESCRIPTION</u>
2.0	Wood backing	Provide full length wood backing in metal framing in new jambs and heads for fastening the storefront system. See Architectural Drawings.
2.1	Sidelite bottom rail	Make the bottom rail of sidelites similar to detail 7/A6.3, TYP.

ARCHITECTURAL DRAWINGS

2.10	Drawing 1/ADD1.10 Add	Wood backing in metal framing full length of jamb and head.
2.11	Drawing 2&3/ADD1.16 Add	Wood backing in metal framing full length of jamb and head.
2.12	Drawing 1/ADD1.16 Revise	Door 61 bottom rail to be 12" tall, mid rail to be 8" tall, and upper mid rail to be 6" tall.
2.13	Drawing 6/A1.3 Revise	Rail to be 6" tall.
2.14	Drawing 4/A1.3 Revise	Storefront sill to be 4 ½"x4 ½".
2.15	Drawings 3&5b/A2.3 Add	Wood backing in metal framing full length of jamb and head.
2.16	Drawing 1/A2.3 Revise	Door 21 bottom rail to be 12" tall, mid rail to be 8" tall.

- 2.17 Drawing 2/A6.3
Add See attached detail clarifying diagonal bracing, clouded ADD2.
- 2.18 Drawing 3&5/A7.3
Add Wood backing in metal framing full length of jamb and head.

Product Substitution Approvals

Specified Item


Approved Substitution

#1 N/A

No substitution requests

END OF ADDENDUM 2

ADD2

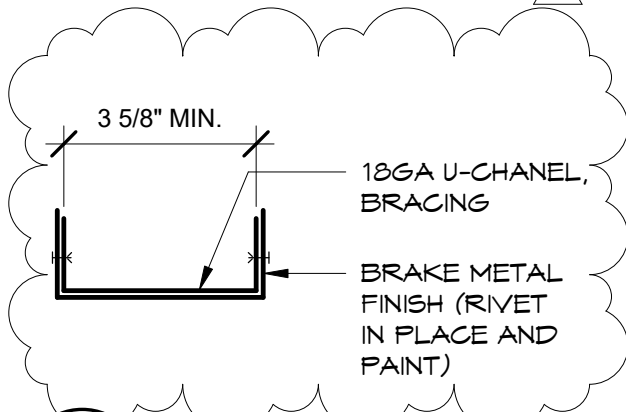

3 BRACE FINISH

ADD2.17 3" = 1'-0"

EXIST. WIDE FLANGE

DIAG. BRACING

REPLACE EXIST. WINDOW W/ SF GLASS & SPEAK HOLES

SPEAK HOLES

REPLACE EXIST. WINDOW W/ NEW STUDENT SERVICE WINDOW

NEW COUNTER

EXISTING COUNTER

2
ADD2.17

EXIST. CONC. DECK


EXIST. LIGHTING

EXIST. SOFFIT

1'-6"
7'-1 3/4"

1 SERVICE WINDOW

ADD2.17 1/4" = 1'-0"

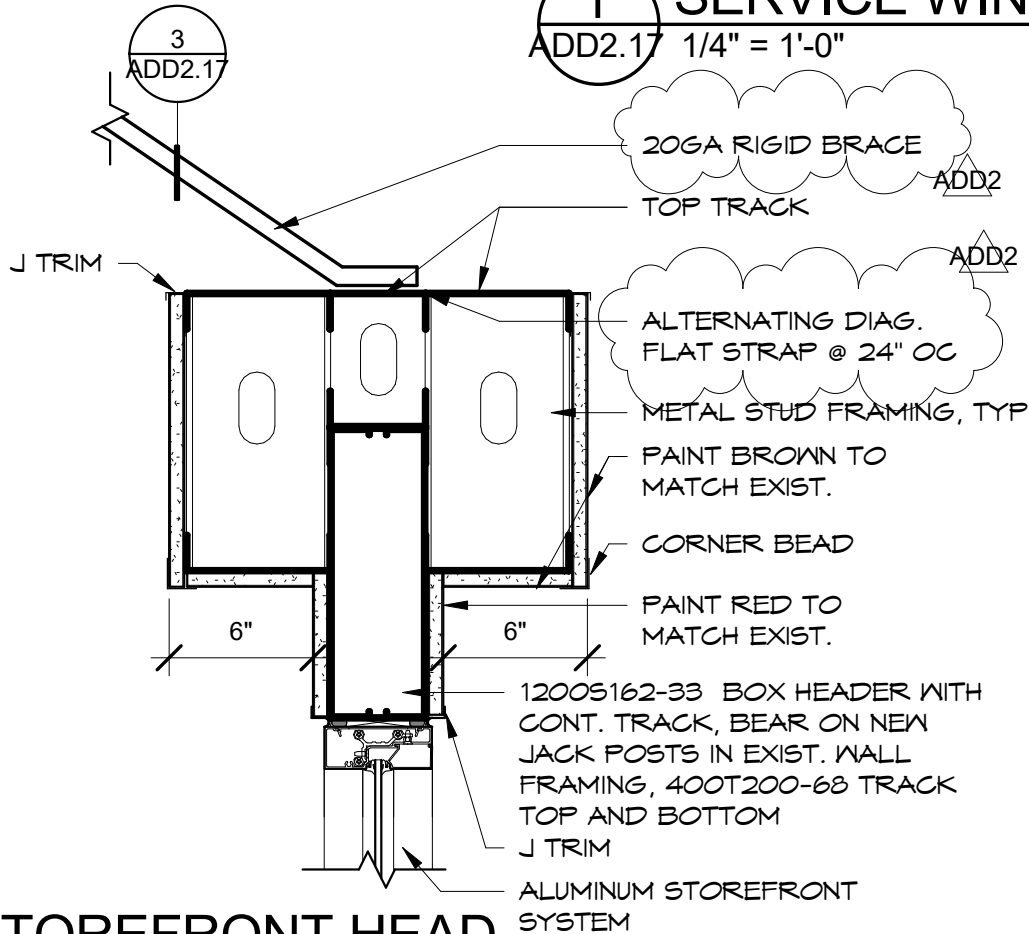

2 STOREFRONT HEAD

ADD2.17 1 1/2" = 1'-0"

DIAGONAL BRACING

LONGVIEW SCHOOL DISTRICT

CASCADE MIDDLE SCHOOL



950 12th AVE., SUITE 200
LONGVIEW, WA 98632
PHONE: 360-425-0000

Scale
As indicated

Date
11/30/2022

Project #
2021-18

ADD2.17

4331
REGISTERED
ARCHITECT

CRAIG M. COLLINS
STATE OF WASHINGTON