RODD HANSEN, ARCHITECT, L.L.C.
ARCHITECTURE AND PLANNING



Date: February 19, 2024

To: All Prime Bidders

RE: Pleasant Hill School District
Forestry Building Remodel

ADDENDUM #2:

YOU ARE HEREBY DIRECTED TO PERFORM THE FOLLOWING WORK AND INCLUDE THE FOLLOWING WORK IN YOUR BID.

Item #1: Sheet P001: Plumbing Fixture Schedule – Note #1 – Delete reference to "owner furnished". The contractor shall supply and install all plumbing fixtures.

Item #2: Refer to the attached specification for the range.

Item #3: Refer to the attached specification for the dishwasher.

Item #4: Refer to the attached specification for the larger cooler.

Item #5: Below are the Division 23 sections included in the project:

23 05 29	Hangers and Supports for HVAC Piping and Equipment
23 05 53	Identification for HVAC Piping and Equipment
23 05 93	Testing, Adjusting and Balancing for HVAC
23 07 13	Duct Insulation
23 07 19	HVAC Piping Insulation
23 23 00	Refrigerant Piping
23 31 00	HVAC Ducts and Casing
23 33 00	Air Duct Accessories
23 34 23	HVAC Power Ventilators
23 37 00	Air Outlets and Inlets
23 81 26	Small-Capacity Split-System Air Conditioners

END OF ADDENDUM #2

NE63A6511SS

SAMSUNG

Samsung Smart Freestanding Electric Range with No Pre-heat Air Fry & Convection

6.3 cu. ft. Capacity



Signature Features

Air Fry

- A healthier way to prepare your favorite fried foods right in your oven with little to no oil.* No preheating required.

*As compared to deep frying. Air fry tray sold separately.

Convection

- Powerful convection saves you time by cooking food fast and more evenly.

Large Oven Capacity

- This large 6.3 cu. ft. oven can fit multiple dishes at one time.

Available Colors

- Fingerprint Resistant Stainless Steel (shown)
- Fingerprint Resistant Black Stainless Steel
- Black
- White



Air Fry



Convection

Features

- Stainless Steel Design
- Air Fry – Tray Not Included
- Convection
- Large Oven Capacity – 6.3 cu. ft.
- Rapid Boil™ 3300 W
- Extra Oven Settings - Bread Proof, Dehydrate, Favorite Cook, Keep Warm
- Storage Drawer
- Flexible Cooktop:
  Five Burner Cooktop
  - One Dual Ring Burner (9"/12")
  - One Dual Ring Burner (6"/9")
  - Two Single Burners (6")
  - One Warming Center (7")

Convenience

- Wi-Fi Connectivity
- Voice-Enabled
- SmartThings Cooking
- Convection Auto Conversion
- Self & Steam Clean
- Hidden Bake Element
- Sabbath Mode
- Child Safety Lock
- Delay Start
- Auto Oven Light
- Kitchen Timer

Wi Fi Bixby works with Google Assistant


NE63A6511SS

SAMSUNG

Samsung Smart Freestanding Electric Range with No Pre-heat Air Fry & Convection


6.3 cu. ft. Capacity

Installation Specifications

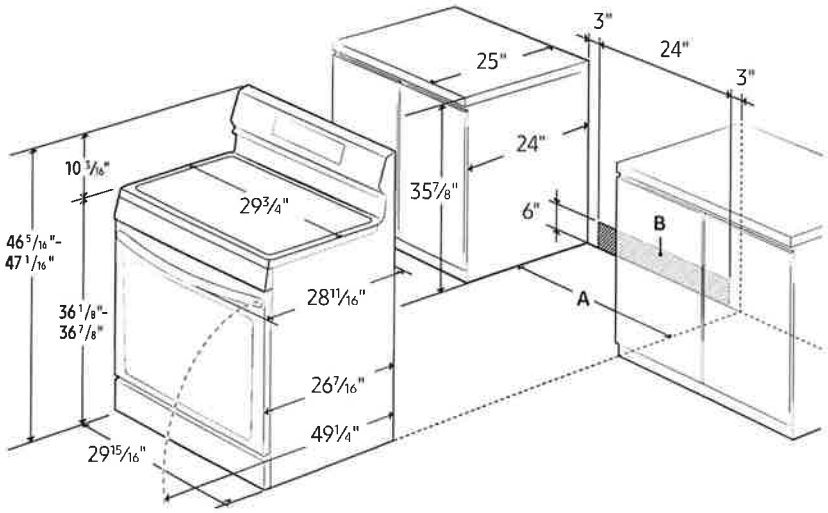

A: Cabinet opening min 30"
B: Acceptable electrical outlet area

IMPORTANT: If your cabinets are over 36¾" high, you must install this range on a hard, heat-resistant support that raises the surface of the range so that it is about even with the countertop.

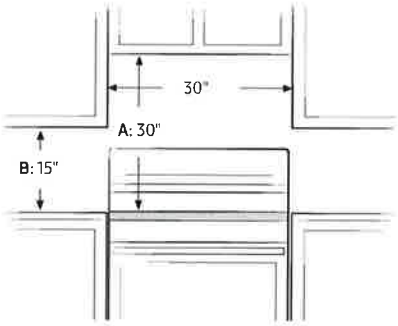

A: 30" minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" minimum when the bottom of the wood or metal cabinet is protected by not less than ¼" of flame retardant millboard covered with not less than no.28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum, or 0.020" copper.

B: 15" minimum between the countertop and the adjacent cabinet bottom.

IMPORTANT: Consult with Installation Manual for detailed instructions before installing. All ranges must be installed with the Anti-Tip device that is included.

Power Source
240V/208V/60 Hz/40A

Electric Cooktop
- Right Front: 9"/12" Dual Ring Burner, 3000 W
- Left Front: 6"/9" Dual Ring Burner, 3300 W
- Right Rear: 6" Burner, 1200 W
- Left Rear: 6" Burner, 1200 W
- Center: Warming Center, 100 W

Oven
- Capacity: 6.3 cu. ft.
- Convection Element/Heater
- Convection Bake
- Convection Roast
- Bake
- Variable Broil: Low/High
- Air Fry
- Bread Proof
- Dehydrate

Warranty
One (1) Year Parts and Labor

Product Dimensions & Weight (WxHxD)
Oven Interior Dimensions:
24 13/16" x 22 7/16" x 19 3/4"

Outside Net Dimensions:
29 15/16" x 46 5/16-47 1/16" (Adjustable) x 28 11/16"

Weight: 148 lbs

Shipping Dimensions & Weight (WxHxD)
Dimensions:
33 1/16" x 50 9/16" x 30 5/16"

Weight: 172 lbs

Color	Model #	UPC Code
Fingerprint Resistant Stainless Steel	NE63A6511SS	887276509426
Fingerprint Resistant Black Stainless Steel	NE63A6511SG	887276509419
Black	NE63A6511SB	887276509402
White	NE63A6511SW	887276509440

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate.

©2021 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660. Tel: 800-SAMSUNG. samsung.com. Samsung is a registered trademark of Samsung Electronics Co. Ltd.

FRIGIDAIRE

FFCD2413U S/W/B

DISHWASHER
24" BUILT-IN



AVAILABLE COLORS

- S — Stainless
- W — White
- B — Black

SIGNATURE FEATURES

A Thorough Clean Every Time
Three separate spray arms give your dishes the ultimate clean every time.

Fits up to 14 Place Settings
Cleans 14 place settings in one cycle.

Heated Drying System
Heating element helps dry your dishes the first time.

Multiple Cleaning Cycle Options
Features easy-to-use cleaning cycle options for your different cleaning needs including Energy Saver, Light Wash and Heavy Wash.

PRODUCT DIMENSIONS

Height (Min.-Max.)	33-1/2" - 35"
Width	24"
Depth	25"

MORE EASY-TO-USE FEATURES

ENERGY STAR® Certified
Maximize your energy and dollar savings with ENERGY STAR® Certified Appliances.

Time Saving 4-Hour Delay Start
Set your dishwasher to run on your schedule. It can be set to run 4 hours in advance.

Cycle Status Indicators
Know when your dishes are washing, drying and clean with the status indicators.

Filtration System
Self-cleaning filter eliminates food particles, keeping dishes clean.

Stay-Put Door Allows For Easier Loading
The door stays put at whatever angle you open it for easy loading and unloading.

Durable Polymer Wash Tub
Supports the drying process, keeping dishes dry the first time.

Built with American Pride
Designed, engineered and assembled in the U.S.A.

CERTIFICATIONS

ENERGY STAR®

FFCD2413U S/W/B
DISHWASHER
24" BUILT-IN

FRIGIDAIRE

FEATURES

Control Design	Ready-Select[4]
Door Latch / Stay-Put Door Hinge Design	Yes / Yes
Low Rinse-Aid Indicator Light	Yes
Interior Color / Interior Design	Greystone / Tall Tub
Wash System	Direct Feed
Wash Levels / Wash Speeds	5 / 5
Sound Package	UltraQuiet™ i
Filter / Filter Trap	Poly / Removable
Food Disposer	Hard
dB Level	60
Drying System	Static Vent

CYCLES

Number of Cycles	3
PowerPlus™ (Heavy)	Yes
Normal	Yes
Light	Yes
Cycle Indicator Light / Control Lock	Yes / Yes

OPTIONS

Heat / No Heat Dry	Yes / Yes
Hi-Temp Wash	Yes
Delay Start	4 Hours

RACK SYSTEM

Rack Design	Standard
Rack Coating	PVC
Lower Rack –	
SpaceWise® Silverware Basket	Standard
Upper Rack –	
Rack Type	Basic

CERTIFICATIONS

ENERGY STAR®	Yes

SPECIFICATIONS

Water Inlet Location	Left Bottom Front
Water Usage (Gallons)	6.0
Water Pressure (PSI)	20 – 120
Integral Air Gap on Supply	Yes
Leveling Legs	Yes
Power Supply Connection Location	Right Bottom Front
Voltage Rating	120V / 60 Hz / 15A
Connected Load (kW Rating) @ 120 Volts[1]	1.44
Amps @ 120 Volts	10.0
Shipping Weight (Approx.)	83 Lbs.


[1] For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation

PRODUCT DIMENSIONS

A - Height (Min. - Max.)	33-1/2" - 35"
B - Width	24"
C - Depth	25"
Depth with Door Open 90°	49-1/4"

CUTOUT DIMENSIONS

Height (Min.)	33-1/2"
Height (Max.)	35-1/4"
Width (Min.)	24"
Depth (Min.)	24"

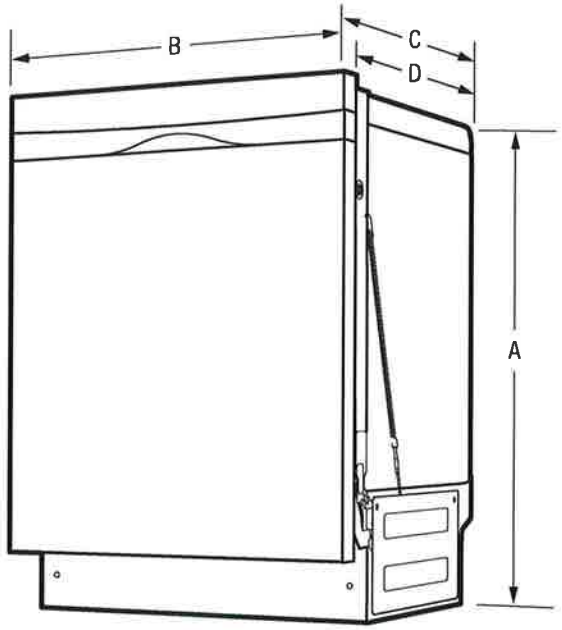

c UL us Meets requirements of ASSE 1006

Note: *For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca.*

Specifications subject to change. *Accessories information available on the web at* ***frigidaire.com / frigidaire.ca***

FRIGIDAIRE


USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • **frigidaire.com**
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • **frigidaire.ca**


FFCD2413U 06/18

©2018 Electrolux Home Products, Inc.

FFCD2413U S/W/B
DISHWASHER
24" BUILT-IN

FRIGIDAIRE

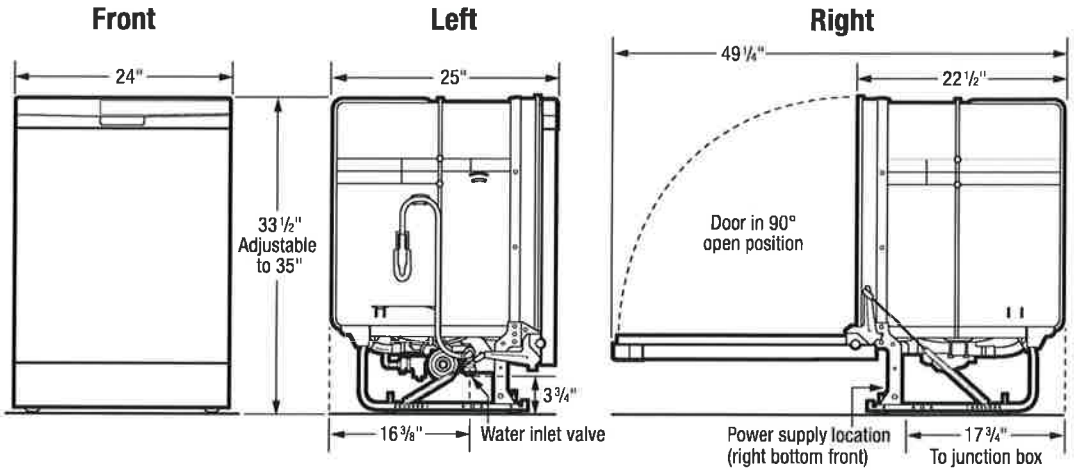

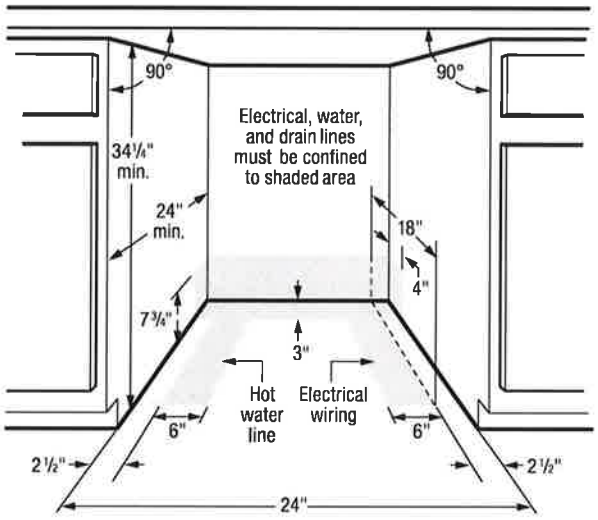

INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) – 83 Lbs.
- Voltage Rating – 120V/60 Hz/15 Amps (maximum 20 Amps if connected with disposer)
- Connected Load (kW Rating) @ 120 Volts = 1.44 kW
  (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120V = 10 Amps
- Always consult local and national electric & plumbing codes. Meets requirements of ASSE 1006—integral air gap on supply.
- Water Pressure – Hot water line to dishwasher must provide between 20 and 120 pounds per square inch (psi) with at least 120°F hot water temperature.
- Make sure location has correct drain, water and electrical outlets to make connections—MUST be confined to shaded areas.
- Electrical and water supplies should enter cabinet opening on floor, or through back or side walls, as shown in shaded areas.
- Keep back free of drain, water & electrical supply.
- Connections preferably located toward left side of dishwasher. Do not cross drain, water or electrical lines in front of motor, blower or frame.
- If connecting drain hose to sink trap, local code may require installation of Air Gap Kit (not included).
- Leveling legs supplied to adjust height. (Note: Height only adjustable to 35-3/4" max. when installed in 35-3/4" max. standard cabinetry cutout. 5/16" min. clearance required from top of unit to underside of countertop. Dimensions do NOT include insulation — insulation blanket may be compressed during installation.)
- When installing adjacent to wall, cabinet or other obstruction that extends beyond front edge of unit, allow 2" minimum clearance between opened door and obstruction.
- Floor should be flat and free of obstructions with carpet removed to provide motor clearance.
- When installing at end of cabinet line, sides and back must be fully enclosed.
- Do not install unit under a cooktop, damage will occur.
- Recommended to seal cabinets, enclosing all sides of dishwasher, including underside of countertop, with oil-based paint or moisture-proof polyurethane to prevent possible steam/moisture damage.

c UL us *Meets requirements of ASSE 1006*

Note: *For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca.*

Specifications subject to change. *Accessories information available on the web at* ***frigidaire.com / frigidaire.ca***

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • **frigidaire.com**
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • **frigidaire.ca**

FFCD2413U 06/18

©2018 Electrolux Home Products, Inc.

Global ports and supply chain disruptions have led to industry wide inventory and shipping delays. Please contact us for more information about your project.

Education Center | Login | Register MY CART

CALL US NOW 1-800-220-2874 Se habla español
Request a Quote

DISPLAY WALK-INS WALK-IN COOLERS WALK-IN FREEZERS REACH-IN REFRIGERATION COMMERCIAL REFRIGERATORS COMMERCIAL FREEZERS REFRIGERATED DISPLAY CASES REFRIGERATED & PREP EQUIPMENT FLORAL COOLERS IC MACH

CONTACT US







Powers (FS52SDHC) 52" Wide Refrigerated Floral Cooler with Two Swinging Glass Doors

$4,950.00

Extra Shelf

None

Right Side

None

CONTACT US

Left Side

None

Delivery Options

- (●) None
- ( ) Liftgate Delivery + $100

Add to cart & Estimate shipping

Glass door floral cooler, equipped with 2 swing glass display doors, interior vertical LED lighting, and a bottom mount refrigeration system. Interior volume: 41 cu. ft.. Anodized Aluminum double pane glass and heated PVC frames. Cooler comes with stainless steel bottom pans, adjustable coated wire shelving, and powder-coated exterior finishes. Black or white interior and exterior finish available.

MANUFACTURER SPEC SHEET
DOWNLOAD

ASK A QUESTION

Additional Information

Features	Automatic condensate evaporators, Louvered motor covers, Switch controlled vertical LED lamps.
Benefits	Refrigeration system automatically senses and then rids itself of any excess condensation a very important factor for a cooler in a high humidity environment. You can turn lights on and off with a switch to lower electrical costs and space

	saving design for smaller stores. Environmentally friendly refrigerants are used with low E and argon-filled double panel glass doors.
Capacity	41
Depth	32
Height	74.5
Width	52
Phase	1
Amperage	9.0 amps
Brand	Powers
Voltage	115V
Compressor HP	1/3 HP
Compressor Location	Bottom
Door Type	Glass
Opening Style	Swing
Number of Shelves	4
Refrigerator Type	Self Contained
Certifications	ETL
Warranty	1 year parts and Labor Warranty, 5 year compressor
Lighting	LED
SKU	FS52SDHC
Weight	521.0 lb
Number of Doors	2
Number of Sections	2

CONTACT US

QUESTIONS & ANSWERS

Ask a Question