Barnegat Township Board of Education Energy Savings Plan

for New Jersey Board of Public Utilities

August 17, 2020

Draft Report Prepared by:



1639 Route 10 East Parsippany, NJ 07054 (973) 538-2120

CHA Project No. 061157

Revision Number	<u>Date</u>
Revision 0	June 16th, 2020
Revision 1	June 30 th , 2020
Revision 2	August 3 rd , 2020
Revision 3	August 17 th , 2020

Barnegat Board of Education - Energy Savings Plan

Table of Contents

1.0	Executive Summary	1
2.0	Energy Audit Results	8
3.0	Baseline Energy Analysis	8
3.1	Utilities	8
3.2	Solar PV Generation	9
4.0	Energy Conservation Measures	11
4.1	Lighting Measures	13
4.2	HVAC Systems Measures	17
4.3	Controls Measures	25
4.4	Water Measures	30
4.5	Building Management Systems Upgrades	32
4.6	Combined Heat & Power	32
5.0	Renewable Energy	33
6.0	Financial Analysis	35
6.1	Overview	35
6.2	Demand Response	35
6.3	Operation and Maintenance	36
6.4	Incentives	36
6.5	Simple Payback Analysis	37
6.6	Cash Flow Analysis	42
7.0	Energy Star Portfolio Manager	44
8.0	Greenhouse Gas Emission Reductions	45
9.0	Maintenance Requirements	46
10.0	Design Phase	47
10.	1 Overview	47
10.2	2 Construction Documents (CD) Phase	47
10.	3 Bidding and Award Phase	47
10.4	4 Construction Phase	47
11.0	Potential Risks	48
Appe	endix A: LGEA Reports	49
Appe	endix B: LGEA ECM Comparison	50
Appe	endix C: Utility Analysis	51

Appendix D: Financial Analysis	52
Appendix E: EPA Portfolio Manager	53
Appendix F: GreenTech Proposal	54
Appendix G: Jersey State Controls Proposal	55
Appendix H: BPU Forms	56
Appendix I: Barnegat Township Board of Education Resolution	57

REPORT DISCLAIMER

A walkthrough of four (4) of the schools was performed, which included gathering nameplate information and operating parameters for all accessible equipment and many of the lighting systems. Two (2) of the elementary schools were not visited by CHA due to restrictions resulting from the COVID-19 pandemic. Unless otherwise stated, model, efficiency, and capacity information included in this report were collected directly from equipment nameplates and /or from documentation provided by the owner during the site visit. Typical operation and scheduling information was obtained from interviewing school staff.

This Energy Savings Plan (ESP) was conducted in accordance with New Jersey Clean Energy Protocols to Measure Resource Savings. As such, an investment grade energy audit (IGA) was performed for the Owner-approved Energy Conservation Measures (ECMs) that were selected based on the original Local Government Energy Audit completed in October 2019 and recommendations provided by CHA following our audit. Cost and savings calculations for a given measure were estimated to within ±20% and are based on data obtained from the facility personnel, data obtained during site observations, professional experience, historical data, vendor quotes, and standard engineering practice. As the annual energy savings and estimated implementation costs are dependent on several dynamic factors, the accuracy of the energy savings and subsequent financial analysis is dependent on the measured, observed or provided baseline assumptions which include but may not be limited too; utility costs, utility rate changes, building usage, building temperatures, weather conditions, inflation, interest rate changes, etc. For these reasons, there is no guarantee expressed or implied for the actual annual energy savings resulting from the implementation of this ESP.

1.0 Executive Summary

This Energy Savings Plan (ESP) was prepared by CHA Consulting, Inc. (CHA) for the Barnegat Township School District (BTSD) in accordance with Energy Savings Improvement Program (ESIP) requirements, as specified in P.L. 2009, c.4 and P.L. 2012, Chapter 55. The ESP covers six (6) of BTSD's school buildings:

- 1. Cecil S. Collins Elementary School (Collins),
- 2. Barnegat Township High School (High School),
- 3. Robert L. Horbelt Elementary School (Horbelt),
- 4. Joseph T. Donahue Elementary School (Donahue),
- 5. Lillian M. Dunfee Elementary School (Dunfee), and
- 6. Russell O. Brackman Middle School (Brackman).

This report describes the proposed energy conservation measures and the associated energy savings that support how the ESP will pay for itself in reduced utility costs. The buildings/structures included in this ESP are as follows:

Table 1: Barnegat Township School District Buildings Summary

Name	Address	Description	Square Footage
Collins	570 Barnegat Blvd. N., Barnegat Twp., NJ 08005	Cecil S. Collins Elementary School was constructed in 1980 with major renovations in 2005. Includes Pre-K through 5.	86,000
High School	180 Bengal Blvd., Barnegat Twp., NJ 08005	The Barnegat Twp. High School was constructed in 2004, with a major addition of a new classroom wing and gymnasium completed in 2008. Includes Grades 9 through 12.	201,214
Horbelt	104 Bur St., Barnegat Twp., NJ 08005	Robert L. Horbelt Elementary School was constructed in 2001 with an addition of new classrooms added in 2009. Includes Grades K through 5.	80,856
Donahue	200 Bengal Blvd., Barnegat Twp., NJ 08005	The Joseph T. Donahue Elementary School was constructed in 2008 and is the newest of the Barnegat Twp. schools. Includes Grades K through 5.	72,402
Dunfee	128 Barnegat Blvd. N., Barnegat Twp., NJ 08005	The Lillian M. Dunfee Elementary School was constructed in 1974 with an addition of new classrooms and gymnasium added in 2009. Includes Grades K through 5.	70,817
Brackman	600 Barnegat Blvd. N., Barnegat Twp., NJ 08005	The Russell O. Brackman Middle School was constructed in 1989. Additions and alterations were made to the middle school in 2008, with the additions consisting of a classroom wing and a gymnasium. Includes Grades 6 through 8.	172,970
		Total	684,259

Under the law, the ESP must address the following:

- 1. The results of the energy audit;
- 2. A description of the energy conservation measures that will comprise the program:
- 3. An estimate of greenhouse gas reductions resulting from those energy savings;
- 4. Identification of all design and compliance issues and identification of who will provide these services;
- 5. An assessment of risks involved in the successful implementation of the plan;
- 6. Identify the eligibility for, and costs and revenues associated with the PJM Independent System Operator for demand response and curtailable service activities;
- 7. Schedules showing calculations of all costs of implementing the proposed energy conservation measures and the projected energy savings;
- 8. Maintenance requirements necessary to ensure continued energy savings, and describe how they will be provided; and
- 9. If developed by an Energy Services Company (ESCO), a description of, and cost estimates of a proposed energy savings guarantee (not applicable to this ESP).

The following tables summarize the recommended ECMs included in this ESP. Additional details of these ECMs are included in section 4.0 Energy Conservation Measures.

Table 2: District Wide ECMs Summary

ECM No.	ECM Name	Total Cost Savings* (\$)	Implementation Cost (\$)	Payback
1.01	Convert all interior lighting to LED lighting	68,513	1,082,118	(years) 15.8
1.02	Install occupancy/daylight/dimming controls	3,140	44,333	14.1
1.03	Convert all exterior lighting to LED lighting and install controls	13,417	150,215	11.2
2.01	Replace Boilers, optimization controls	7,995	758,967	94.9
2.02	DHW Boiler Upgrade	1,273	38,114	49.3
2.03	DHW Tankless System Conversion	175	10,611	60.8
2.04	DHW Heater Electric to a Natural Gas Conversion	658	26,779	40.7
2.05	Install VFDs on Pumps	361	16,280	45.1
2.06	Install VFDs on AHU Fans	20,645	188,172	9.1
2.09	Upgrade Select WSHPs		183,131	65.8
2.10	Convert AHUs w/ Electric Heat to Hydronic Heat		33,293	8.6
2.13	Replace Mini-Split Units	109	14,368	131.3
2.14	Exhaust Fan Controls Upgrade	3,315	21,321	6.4
2.17	Replace Air Cooled Chiller	1,221	245,865	201.4
3.01	Controls Systems Upgrades	3,625	203,855	56.2
3.02	Install Walk-In Refrigerator/Freezer Controls	32,743	1,207,607	36.9
3.03	Install kitchen hood controls	5,142	50,484	9.8
3.04	Kitchen hood controls optimization	2,439	250,048	102.5
3.08	Add occupancy-based controls to the Vending Machines		8,954	6.6
4.01	Install Low Flow Aerators	3,123	10,102	3.2
	Totals	180,517	4,558,131	25.3

^{*}Total Savings include energy and O&M savings.

Table 3: Collins ECMs Summary

ECM No.	ECM Name	Total Cost Savings* (\$)	Implementation Cost (\$)	Payback (years)
2.03	DHW Tankless System Conversion	175	10,611	60.8
3.01	Controls Systems Upgrades	9,837	205,003	20.8
3.02	Install Walk-In Refrigerator/Freezer Controls	738	8,172	11.1
3.03	Install kitchen hood controls	886	19,368	21.9
3.08	Add occupancy-based controls to the Vending Machines	306	1,172	3.8
4.01	Install Low Flow Aerators	794	1,259	1.6
	Totals	12,736	245,586	19.3

^{*}Total Savings include energy and O&M savings.

Table 4: High School ECMs Summary

ECM No.	ECM Name	Total Cost Savings* (\$)	Implementation Cost (\$)	Payback (years)
1.01	Convert all interior lighting to LED lighting	24,734	423,681	17.1
1.03	Convert all exterior lighting to LED lighting and install controls	5,644	41,903	7.4
2.01	Replace Boilers, optimization controls	5,838	443,333	75.9
2.06	Install VFDs on AHU Fans	20,645	188,172	9.1
2.13	Replace Mini-Split Units	109	14,368	131.3
2.17	Replace Air Cooled Chiller	3,625	203,855	56.2
3.01	Controls Systems Upgrades	13,628	363,821	26.7
3.02	Install Walk-In Refrigerator/Freezer Controls	961	9,136	9.5
3.04	Kitchen hood controls optimization	1,355	8,954	6.6
3.08	Add occupancy-based controls to the Vending Machines	1,305	4,069	3.1
4.01	Install Low Flow Aerators	1,201	5,388	4.5
	Totals	79,045	1,706,679	21.6

^{*}Total Savings include energy and O&M savings.

Table 5: Horbelt ECMs Summary

ECM No.	ECM Name	Total Cost Savings* (\$)	Implementation Cost (\$)	Payback (years)
1.01	Convert all interior lighting to LED lighting	10,840	205,678	19.0
1.02	Install occupancy/daylight/dimming controls	137	3,486	25.4
1.03	Convert all exterior lighting to LED lighting and install controls	1,343	23,240	17.3
2.04	DHW Heater Electric to a Natural Gas Conversion	334	13,880	41.5
2.09	Upgrade Select WSHPs	2,784	183,131	65.8
2.15	Replace Cooling Tower		245,865	201.4
3.01	1 Controls Systems Upgrades		178,945	533.2
3.02	Install Walk-In Refrigerator/Freezer Controls	578	8,172	14.1
3.03	Install kitchen hood controls	630	19,548	31.0
3.08	Add occupancy-based controls to the Vending Machines		1,172	4.8
4.01	Install Low Flow Aerators	405	2,483	6.1
	Totals	18,851	885,601	47.0

^{*}Total Savings include energy and O&M savings.

Table 6: Donahue ECMs Summary

ECM No.	ECM Name	Total Cost Savings* (\$)	Implementation Cost (\$)	Payback (years)
1.01	Convert all interior lighting to LED lighting	12,515	157,630	12.6
1.02	Install occupancy/daylight/dimming controls	35	2,000	57.3
1.03	Convert all exterior lighting to LED lighting and install controls	2,527	44,852	17.7
2.02	DHW Boiler Upgrade	455	13,449	29.6
2.14	Exhaust Fan Controls Upgrade	1,401	8,970	6.4
3.02	Install Walk-In Refrigerator/Freezer Controls	1,184	9,141	7.7
3.03	Install kitchen hood controls	287	190,325	663.6
3.08	Add occupancy-based controls to the Vending Machines	340	828	2.4
4.01	Install Low Flow Aerators	714	2,113	3.0
	Totals	19,458	429,307	22.1

^{*}Total Savings include energy and O&M savings.

Table 7: Dunfee ECMs Summary

ECM No.	ECM Name	Total Cost Savings* (\$)	Implementation Cost (\$)	Payback (years)
1.01	Convert all interior lighting to LED lighting	1,680	11,074	6.6
1.02	Install occupancy/daylight/dimming controls	1,634	22,522	13.8
1.03	Convert all exterior lighting to LED lighting and install controls	1,238	14,100	11.4
2.04	DHW Heater Electric to a Natural Gas Conversion	323	12,899	39.9
2.10	Convert AHUs w/ Electric Heat to Hydronic Heat	3,862	33,293	8.6
2.14	Exhaust Fan Controls Upgrade		12,351	6.5
3.01	Controls Systems Upgrades	1,098	147,066	133.9
3.02	Install Walk-In Refrigerator/Freezer Controls	1,180	8,172	6.9
3.03	Install kitchen hood controls	636	20,808	32.7
3.08	Add occupancy-based controls to the Vending Machines	171	414	2.4
4.01	Install Low Flow Aerators	502	1,320	2.6
	Totals	14,238	284,018	19.9

^{*}Total Savings include energy and O&M savings.

Table 8: Brackman ECMs Summary

ECM No.	ECM Name	Total Cost Savings* (\$)	Implementation Cost (\$)	Payback (years)
1.01	Convert all interior lighting to LED lighting	18,744	284,055	15.2
1.02	Install occupancy/daylight/dimming controls	1,334	16,325	12.2
1.03	Convert all exterior lighting to LED lighting and install controls	2,665	26,120	9.8
2.01	Replace Boilers, optimization controls	2,157	315,634	146.3
2.02	DHW Boiler Upgrade	818	24,666	30.2
2.05	Install VFDs on Pumps	361	16,280	45.1
3.01	Controls Systems Upgrades	7,844	312,772	39.9
3.02	Install Walk-In Refrigerator/Freezer Controls	502	7,691	15.3
3.08	Add occupancy-based controls to the Vending Machines	759	2,448	3.2
4.01	01 Install Low Flow Aerators		951	0.9
	Totals	36,189	1,006,940	27.8

^{*}Total Savings include energy and O&M savings.

2.0 Energy Audit Results

The first step to implementing an ESIP is the completion of an initial energy audit. This ESP includes, as reference, the Local Government Energy Audits (LGEAs) previously approved by the NJBPU on October 31st, 2019. The audits are included in Appendix A.

In addition to the previously conducted audits mentioned above, CHA completed an IGA as part of the development of this ESP. The IGA verified baseline building and equipment operating parameters, including specific equipment operation, seasonal operation data, etc. In addition, the following documents were collected and reviewed by CHA:

- 1. Facility Assessment Report completed by Spiezle Architectural Group Inc. (Spiezle) on August 27th, 2019, including an equipment inventory.
- 2. 13-months of Utility Bills (February 2019 through February 2020)
- 3. Existing Brookfield Renewable Power Purchase Agreement (PPA) and Construction Drawings
- 4. GreenTech Energy Services Lighting Proposal dated September 25, 2019.
- 5. Energy NJ LLC Solar PV Array Proposal dated May 11, 2020
- 6. Jersey State Controls Proposal Scope and Pricing
- 7. Original and renovation construction drawings (HVAC, electrical, structural, etc.) provided by Spiezle on March 23, 2020
- 8. Barnegat Township School District maintenance account history dated May 12,2020
- 9. The Thermo Group Infrared Roof Moisture Survey dated October 2018
- 10. The Thermo Group Roof Repair Procedures dated October 15, 2018

3.0 Baseline Energy Analysis

3.1 Utilities

An energy and cost analysis of BTSD's utilities – electricity, natural gas, photovoltaic, and water/sewer – was completed to account for more recent utility rates and usage since the original LGEAs were prepared. Electricity is delivered by Jersey Central Power & Light (JCP&L) and supplied by Plymouth Rock Energy. Natural gas is delivered by New Jersey Natural Gas (NJNG) and supplied by UGI Energy Services LLC. Water and Sewer are provided by Barnegat Township. The energy analysis covered a 12-month period; March 2019 through February 2020.

CHA weather normalized the natural gas usage with 30-year historical weather data. This accounts for the difference in weather in a given year, which may be much hotter or colder than an average year for Barnegat, NJ. Normalizing also makes sure the energy savings calculations accurately represent expected long-term annual energy savings. The detailed utility analysis which includes normalization is included in Appendix B.

For the 12-month period ending in February 2020, the utility usage for the buildings was as follows:

Table 8: BTSD Utility Summary

	Collins	High School	Horbelt	Donahue	Dunfee	Brackman
Electric						
Annual Usage (kWh)	368,235	2,214,480	693,299	581,852	370,944	1,336,622
Peak Demand (kW)	136.6	701.3	214.0	201.3	192.8	431.1
Min. Demand (kW)	96.1	397.4	131.9	132.5	123.8	307.6
Avg. Demand (kW)	121.0	516.5	179.7	159.8	160.5	373.8
Annual Cost (\$)	52,708	252,824	80,035	67,975	47,724	156,762
Blended Rate (\$/kWh)	0.143	0.114	0.115	0.117	0.129	0.117
Supply Rate (\$/kWh)	0.120	0.097	0.097	0.097	0.098	0.097
Demand Rate (\$/kW)	5.83	6.21	6.00	5.90	5.95	6.18
Natural Gas						
Annual Usage (therms)	23,667	40,643	12,637	12,963	16,994	16,296
Annual Cost (\$)	24,937	43,924	14,175	14,566	17,628	17,487
Rate (\$/therm)	1.05	1.08	1.12	1.12	1.04	1.07
Water/Sewer						
Annual Usage (kGal)	590	2,786	334	556	421	610
Annual Cost (\$)	17,202	42,206	9,658	12,348	9,866	19,178
Water Rate (\$/kGal)	6.66	5.93	5.84	6.04	5.13	6.88

The following table displays the total annual energy usage, in million-Btu per year (MMBtu/yr), and the EUI, in kilo-Btu per year (kBtu/yr), for each school

Table 9: BTSD Energy Summary

	Collins	High School	Horbelt	Donahue	Dunfee	Brackman
Total Energy Use (MMBtu/yr)	5,132	13,503	3,860	4,207	3,930	7,613
EUI (kBtu/SF/yr)	59.7	67.1	47.7	58.1	55.5	44.0

3.2 Solar PV Generation

Solar photovoltaic (PV) arrays were installed on each school in 2012 as part of a single power purchasing agreement (PPA) between BTSD and Brookfield Renewable (Brookfield). The current PPA ends in 2027. A review of JCP&L interval data revealed there is no net export from the BTSD facilities. Therefore, 100% of the solar generation is used by the BTSD facilities. Solar PV generation provides approximately 24% of the total electric power used by the 6 schools, as summarized below:

Table 9: BTSD Solar PV Generation

	Collins	High School	Horbelt	Donahue	Dunfee	Brackman
Photovoltaic						
Annual Generation (kWh)	350,556	454,417	45,812	239,023	224,121	462,149
Percent of Total Usage (%)	49%	17%	6%	29%	38%	26%
Annual Cost (\$)	44,135	57,211	5,768	30,093	28,217	58,185
PPA Rate (\$/kWh)*	0.1259	0.1259	0.1259	0.1259	0.1259	0.1259

^{*} The current PPA includes an escalation rate of 2% per year. Currently, the PPA rate is greater than the utility blended rate for 4 of the 6 schools.

4.0 Energy Conservation Measures

Energy conservation measures included in this ESP are energy savings improvements that require a financial investment. The table below lists all ECMs assessed during the development of this ESP. Base bid ESP ECMs are marked with an "X" and alternate ECMs are marked with and "A". Financially unattractive ECMs were left unmarked.

Table 10: Energy Conservation Measures

	<u>. </u>						
ECM No.	Energy Conservation Measure	Collins	High School	Horbelt	Donahue	Dunfee	Brackman
1.01	Convert all interior lighting to LED lighting		Χ	Χ	Χ	Χ	Χ
1.02	Install occupancy/daylight/dimming controls			Χ	Χ	Χ	Χ
1.03	Convert all exterior lighting to LED lighting and install controls		Χ	Χ	Χ	Χ	Χ
2.01	Replace Boilers, optimization controls		Χ				Α
2.02	DHW Boiler Upgrade				Χ		Χ
2.03	DHW Tankless System Conversion	Х					
2.04	DHW Heater Electric to a Natural Gas Conversion			Χ		Χ	
2.05	Install VFDs on Pumps						Χ
2.06	Install VFDs on AHU Fans		Χ				
2.07	Replace Select RTUs						
2.08	Replace Select ERUs						
2.09	Upgrade Select WSHPs			Χ			Α
2.10	Convert AHUs w/ Electric Heat to Hydronic Heat					Χ	
2.11	Replace Unit Ventilators						
2.12	Replace Fan Coil Units						
2.13	Replace Mini-Split Units		Χ				
2.14	Exhaust Fan Controls Upgrade				Х	Χ	
2.15	Replace Cooling Tower			Α			
2.16	Replace Walk-In Refrigerator/Freezer Condensers/Evaporators						
2.17	Replace Air Cooled Chiller		Х				
3.01	Controls Systems Upgrades	Х	Χ	Χ		Χ	Χ
3.02	Install Walk-In Refrigerator/Freezer Controls	Х	Х	Χ	Х	Х	Χ
3.03	Install kitchen hood controls	Х		Χ	Χ	Χ	
3.04	Kitchen hood controls optimization		Х				
3.05	Scheduling Optimization						
3.06	Setpoint Optimization						
3.07	Setback Programming (Terminal Units)						
3.08	Add occupancy-based controls to the Vending Machines	Х	Χ	Χ	Χ	Χ	Χ
4.01	Install Low Flow Aerators	Х	Χ	Χ	Χ	Χ	Χ
4.02	Touchless Facuets						
4.03	Install Flushless Urinals						
4.04	Install Low Flow Toilets						

In developing the ESP, the above measures were evaluated for inclusion based on the following factors:

- Energy use reduction
- Implementation cost
- Financial payback and annual cash flow
- Value to the school district

CHA prepared IGA-level calculations on selected ECMs to develop the ESP. Field surveys of the buildings and equipment were performed by CHA to verify the data that was included in the LGEA, as necessary to support preparation of an ESP and associated IGA. The survey was coordinated with building personnel, and equipment records were reviewed to obtain more detailed information.

Baseline building and equipment operating parameters were verified and refined, including occupied and unoccupied temperatures, ventilation, normal occupancy, special conditions occupancy, and seasonal operation data. See Appendix C for detailed IGA-level energy calculations, including estimated Greenhouse Gas (GHG) reductions.

Each measure is described in greater detail in the following sections.

4.1 Lighting Measures

1.01 Convert All Interior Lighting to LED

This measure involves the replacement/upgrade of current interior lighting fixtures and lamps to more efficient LED fixtures and lamps. Energy savings for this measure were calculated by applying the existing and proposed fixture wattages to estimated hours of operation. These calculations are based upon one-to-one replacements. For linear fluorescent fixtures, the school has requested that the new LED lamps have internal drivers that allow them to connect to line voltage. The existing ballasts can therefore be removed. This follows the same strategy the school has taken for Collins and Dunfee, and for some fixtures in the four schools listed below. Although the ballast bypass option adds labor cost, the school would like to maintain consistency with the retrofits that have already been done.

The calculations assume that existing lighting levels should be maintained, resulting in the recommended one-for-one replacements.

Building	Description
High School	Approximately 60% of the High School's interior lighting fixtures use T8 linear fluorescent lamps, with the majority being 4ft F25T8 lamps. The remaining 40% of fixtures are broken down as follows: 20% LED lamps/fixtures, 15% CLFs, 5% other fluorescent lamps. There is an opportunity to reduce the High School's annual lighting system electrical consumption by converting all non-LED fixtures and lamps to LED. BTSD has stated that they would like all linear fluorescent lamp conversions to be self-driven ballast bypass LED lamps. All other lighting conversions will be a combination of plug-and-play (PNP) lamps and new LED fixtures.
Horbelt	Approximately 83% of Horbelt's interior lighting fixtures use T8 linear fluorescent lamps, with the majority being 4ft F25T8 lamps. The remaining 17% is comprised of fixtures using CFLs and a variety of other fluorescent lamps. There is an opportunity to reduce Horbelt's annual lighting system electrical consumption by converting all non-LED fixtures and lamps to LED. BTSD has stated that they would like all linear fluorescent lamp conversions to be self-driven ballast bypass LED lamps. All other lighting conversions will be a combination of PNP lamps and new LED fixtures.
Donahue	Approximately 84% of Donahue's interior lighting fixtures use T8 linear fluorescent lamps, with the majority being 4ft F25T8 lamps. The remaining 16% is comprised of fixtures using a variety of other fluorescent lamps, CFLs, and LED lamps/fixtures. There is an opportunity to reduce Donahue's annual lighting system electrical consumption by converting all non-LED fixtures and lamps to LED. BTSD has stated that they would like all linear fluorescent lamp conversions to be self-driven ballast bypass LED lamps. All other lighting conversions will be a combination of PNP lamps and new LED fixtures.
Brackman	Approximately 92% of Brackman's interior lighting fixtures use T8 linear fluorescent lamps, with the majority being 4ft

Building	Description
	F25T8 lamps. The remaining 8% is comprised of LED lamps/fixtures, and fixtures using CFLs and other fluorescent lamps. There is an opportunity to reduce Brackman's annual lighting system electrical consumption by converting all non-LED fixtures and lamps to LED. BTSD has stated that they would like all linear fluorescent lamp conversions to be self-driven ballast bypass LED lamps. All other lighting conversions will be a combination of PNP lamps and new LED fixtures.
Dunfee	Approximately 85% of Dunfee's interior lighting fixtures use T8 linear LED lamps, with the majority being 4ft LED lamps. The remaining 15% is comprised of fixtures using a variety of other CFLs and T5 linear fluorescent lamps. There is an opportunity to reduce Dunfee's annual lighting system electrical consumption by converting all non-LED fixtures and lamps to LED. BTSD has stated that they would like all linear fluorescent lamp conversions to be self-driven ballast bypass LED lamps. All other lighting conversions will be a combination of PNP lamps and new LED fixtures.

1.02 Install Occupancy/Daylight/Dimming Controls

This measure involves the installation of controls on the lighting fixtures proposed in ECM 1.02. The installation of controls will allow for lighting systems to be automatically shut off when spaces are unoccupied. Energy savings for this measure were calculated by applying a reduction in lighting hours to the ECM 1.02 proposed fixture wattages.

Building	Description
Horbelt	Approximately 44% of Horbelt's interior lighting fixtures are controlled via local switches. There is an opportunity to reduce Horbelt's annual lighting system electrical consumption by installing lighting controls to reduce the lighting systems' annual runtimes.
Donahue	Approximately 19% of Donahue's interior lighting fixtures are controlled via local switches. There is an opportunity to reduce Donahue's annual lighting system electrical consumption by installing lighting controls to reduce the lighting systems' annual runtimes.
Brackman	Approximately 100% of Brackman's interior lighting fixtures are controlled via local switches. There is an opportunity to reduce Brackman's annual lighting system electrical consumption by installing lighting controls to reduce the lighting systems' annual runtimes.
Dunfee	Approximately 20% of Dunfee's interior lighting fixtures are controlled via local switches. There is an opportunity to reduce Dunfee's annual lighting system electrical consumption by installing lighting controls to reduce the lighting systems' annual runtimes.

1.03 Convert All Exterior Lighting to LED Lighting and Install Controls

This measure involves the replacement/upgrade of current exterior lighting fixtures and lamps to more efficient LED fixtures and lamps. Energy savings for this measure were calculated by applying the existing and proposed fixture wattages to estimated times of operation. These calculations are based upon one-for-one replacements. The calculations do not consider lumen output and square footage. A more comprehensive lighting study may be required during the design phase to determine appropriate lighting levels.

Building	Description
High School	Approximately 72% of the High School's exterior lighting fixtures use HID lamps, with the majority being 200-watt induction lamps. The remaining 28% is comprised of fixtures using CFLs. All the High School's exterior lighting fixtures are operated through a control system. There is an opportunity to reduce the High School's annual lighting system electrical consumption by converting all non-LED fixtures to LED.
Horbelt	Approximately 81% of Horbelt's exterior lighting fixtures use HID lamps, with the majority being 100-watt metal halide lamps. The remaining 19% is comprised of fixtures using CFLs. All Horbelt's exterior lighting fixtures are operated through a control system. There is an opportunity to reduce Horbelt's annual lighting system electrical consumption by converting all non-LED fixtures to LED.
Donahue	Approximately 61% of Donahue's exterior lighting fixtures use HID lamps, with the majority being 70-watt induction lamps. The remaining 39% is comprised of fixtures using CFLs and incandescent lamps. All of Donahue's exterior lighting fixtures are operated through a control system. There is an opportunity to reduce Donahue's annual lighting system electrical consumption by converting all non-LED fixtures to LED.
Brackman	Approximately 94% of Brackman's exterior lighting fixtures use HID lamps, with the majority being 200-watt induction lamps. The remaining 6% is comprised of fixtures using CFLs. Only 6% of Brackman's exterior lighting fixtures are not operated through a control system There is an opportunity to reduce Brackman's annual lighting system electrical consumption by converting all non-LED fixtures to LED and installing lighting controls.
Dunfee	Approximately 100% of Dunfee's exterior lighting fixtures use CFLs lamps, with the majority being 75-watt lamps. All of Dunfee's exterior lighting fixtures are operated through a control system. There is an opportunity to reduce Dunfee's annual lighting system electrical consumption by converting all non-LED fixtures to LED.

Lighting Measures Summary

The following table summarizes the recommended Lighting measures at a district level.

	District Wide Lighting Measures Summary											
Iten	n Name	kW Savings (kW)	kWh Savings (kWh)	Therm Savings (Therms)	Utility Savings (\$)	O&M Savings (\$)		Total Savings (\$) (Energy + O&M)	Implementation Cost (\$)	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes
1.0	Convert all interior lighting to LED lighting	255.2	512,506	0	68,513	0	129,108	68,513	1,082,118	15.8	13.9	
1.02	2 Install occupancy/daylight/dimming controls	0.0	25,588	0	3,140	0	16,226	3,140	44,333	14.1	8.9	
1.03	Convert all exterior lighting to LED lighting and install controls	24.4	116,581	0	13,417	0	68,342	13,417	150,215	11.2	6.1	
	Total (recommended measures)	279.6	654,675	0	85,071	0	213,676	85,071	1,276,666	15.0	12.5	

4.2 HVAC Systems Measures

2.01 Replace Boilers, Optimize Controls

The Barnegat Township School District currently has a combination of older low efficiency heating hot water (HHW) boilers and new high efficiency condensing HHW boilers. This ECM proposes to replace the older low efficiency HHW boilers with new high efficiency natural gas-fired condensing HHW boilers. Condensing boilers achieve higher combustion efficiencies by using the heat ordinarily wasted in the flue gases to pre-heat the return water entering the boiler. The lower flue vent temperatures result in condensation which is chemically neutralized and drained to the sanitary system.

Building	Description
High School	The High School houses two boiler plants, one installed in 2004 and the other installed in 2009. The 2004 boiler plant feeds the A/B Wing and houses 4 boiler groups installed in a 2N redundancy configuration. Each of the four boiler groups are comprised of eight boilers rated at 399 MBH output, each, with calculated efficiencies averaging between 75% and 77%. The efficiencies were calculated using nameplate data, age, and NJBPU-approved* methodology for derating boiler efficiency based on age. The 2004 boiler plant's total capacity is 12,768 MBH.
	This ECM proposes to replace two of the four boiler strings in the 2004 boiler plant with two 2,000 MBH high efficiency, condensing, modulating natural gas boilers. The ECM also recommends that the new boilers be designated as the lead boilers and the remaining two boiler strings be designated backup boilers only. This ECM would implement an HHW reset schedule based on outdoor air temperatures (OATs). If the backup boilers run, care would need to be taken to keep water temperatures elevated and to deviate from the reset schedule.
	The boilers installed under this ECM would have efficiencies averaging between 90% and 93%. The thermal efficiency improvement of the proposed boilers would result in natural gas savings.
	The 2009 boiler plant feeds the C Wing and houses two 2,000 MBH Benchmark condensing boilers. These boilers are not recommended for replacement.
Brackman (Alternate ECM-1 Included in	Brackman houses one boiler plant with two boilers installed in 2006. The boilers are standard efficiency natural gas fired boilers each with a rated output of 1,020 MBH and a calculated efficiency of 79.2%. The efficiencies were calculated using nameplate data, age, and NJBPU-approved* methodology for derating boiler efficiency based on age.
Cash Flow)	This ECM proposes to replace the two existing boilers with two 1,200 MBH (input) high efficiency, condensing, natural gas fired boilers. The boilers installed under this ECM would have efficiencies averaging between 90% and 93%. The thermal efficiency improvement of the proposed boilers would result in natural gas savings.

^{*}See Pay for Performance Program Existing Buildings Partner Guidelines Version 4.4 FY20 (P4P EB Guidelines FY20) section 4.6.4.7 Derating HVAC Equipment Efficiency.

2.02 DHW Heater Upgrade

The Barnegat Township School District currently has a combination of older, low efficiency, natural gas domestic hot water (DHW) heaters; new, high efficiency, condensing natural gas DHW heaters; and electric DHW heaters. This ECM proposes to replace the older low efficiency DHW heaters with new high efficiency natural gas fired condensing DHW heaters. Condensing units achieve higher combustion efficiencies by using the heat ordinarily wasted in the flue gases to pre-heat the return water entering the boiler. The lower flue vent temperatures result in condensation which is chemically neutralized and drained to the sanitary system.

Building	Description
Donahue	Domestic hot water at Donahue is generated by a PVI natural gas fired heater with an input rating of 199 MBH, an estimated efficiency of 78%, and a storage tank capacity of 175 gallons. This unit was installed in 2008. The heater efficiency was calculated using nameplate data, age, and the P4P EB Guidelines FY20 section 4.6.4.7 Derating HVAC Equipment Efficiency. The proposed heater installed under this ECM would have a rated input of 199 MBH, an average efficiency of 95%, and a storage capacity of 250 gallons. The thermal efficiency improvement of the proposed unit would result in natural gas savings.
Brackman	Domestic hot water at Brackman is generated by two A.O. Smith natural gas fired water heaters each with an input rating of 420 MBH, a calculated efficiency of 74%, and a shared storage tank with capacity of 200 gallons. The efficiencies were calculated using nameplate data, age, and the P4P EB Guidelines FY20 section 4.6.4.7 Derating HVAC Equipment Efficiency. These units were installed in 1989 and are well past the end of their useful life. The proposed heater installed under this ECM would have a rated input of 500 MBH and an average efficiency of 95%. The thermal efficiency improvement of the proposed boilers would result in natural gas savings.

2.03 DHW Tankless System Conversion

The Barnegat Township School District currently has a combination of older, low efficiency, natural gas DHW boilers; new, high efficiency, condensing natural gas DHW boilers; and electric DHW boilers. Most of these units have storage tanks. This ECM proposes to remove select DHW heaters with storage tanks and replace them with new, high efficiency, natural gas fired, instantaneous, condensing DHW heaters. Condensing DHW heaters achieve higher combustion efficiencies by using the heat ordinarily wasted in the flue gases to pre-heat the return water entering the boiler. The lower flue vent temperatures result in condensation which is chemically neutralized and drained to the sanitary system. Tankless DHW systems eliminate standing losses incurred through DHW storage tanks.

Building	Description
Collins	Domestic hot water at Collins is generated by a Vanguard natural gas fired heater with an input rating of 75 MBH, an estimated efficiency of 75.7%, and a storage tank capacity of 75 gallons. The unit's efficiency was calculated using nameplate data, age, and the P4P EB Guidelines FY20 section 4.6.4.7 Derating HVAC Equipment Efficiency. This DHW heater was installed in 2008. The proposed heater installed under this ECM would have an average efficiency of 95%. The thermal efficiency improvement of the proposed heater as well as the removal of the DHW storage tank would result in natural gas savings.

2.04 DHW Heater Electric to a Natural Gas Conversion

The Barnegat Township School District currently has a combination of older, low efficiency, natural gas DHW heaters; new, high efficiency, condensing natural gas DHW heaters; and electric DHW heaters. This ECM proposes to replace the electric DHW heaters with new high efficiency natural gas-fired condensing DHW heaters. Natural gas is less expensive per unit energy, when compared to electricity.

Building	Description
Horbelt	Domestic hot water for the music wing at Horbelt is generated by an A.O. Smite electric heater. This ECM recommends the electric DHW heater be removed and a high efficiency, natural gas fired, tankless DHW heater be installed. The DHW heater installed under this ECM would have an average efficiency 92%. The conversion from electricity to natural gas will result in utility cost savings.
Dunfee	Domestic hot water for the kitchen at Dunfee is generated by a Bradford-White electric heater with a storage tank capacity of 80 gallons. This heater was installed in 2008. The heater installed under this ECM would be a high efficiency, natural gas fired, condensing tankless DHW heater with a rated input of 199 MBH, a max flow rate of 10 GPM, an average efficiency of 93%. The conversion from electricity to natural gas will result in utility cost savings.

2.05 Install VFDs on Pumps

The Barnegat Township School District utilizes pumps for the transportation of HHW, DHW, Chilled Water (CHW), and Condenser Water (CW). Most of the pumps in the BTSD buildings are equipped with variable frequency drives (VFDs). However, there are some pumps that are still controlled by conventional motor starters. In contrast to constant speed controls and multi-speed controls, VFDs allow for the variable control of motor speeds. VFDs also enable a constant differential pressure to be maintained in the distribution piping of a system. This level of control allows for a system to operate efficiently and effectively during part load conditions. Due to the Affinity Laws, VFDs also yield energy savings when motor speeds are reduced. This ECM reduces energy consumption and improves overall system efficiency through the installation of VDFs on constant speed and multi-speed motors.

Building	Description
Brackman	The HHWPs at Brackman are equipped with high efficiency, 5-HP motors and constant speed controls. The motors have been installed in a 2N redundancy configuration and are operated in a lead-lag fashion. The control valves on the HHW loop are 2-way type valves. This ECM recommends the installation of VFDs on these motors, along with a differential sensor in the distribution system. The pumps will operate to maintain an adjustable differential pressure. Please note that it is assumed that the existing motors will need to be replaced with inverter-duty rated, premium efficiency motors.

2.06 Refurbish Select AHUs (Fan VFD Conversion)

The Barnegat Township School District buildings utilize variety of HVAC equipment types to condition and ventilate spaces, one of which is air handling units (AHUs) equipped with CHW coils for cooling and either HHW coils, natural gas-fired furnaces, or electric resistance coils for heating. AHUs can be classified into two system types: Constant Air Volume (CAV) and Variable Air Volume (VAV). Airflow in a VAV system is changed by varying fan motor speed with VFDs and adjusting VAV air box damper positions. Due to the Affinity Laws, the fan motor VFDs yield energy savings when motor speeds are reduced. This ECM recommends converting CAV AHU systems to VAV AHU systems through the installation of VFDs on constant speed motors. This will reduce energy consumption and improve overall system efficiency.

Building	Description
High School	The High School has 18 AHUs and they are comprised of both CAV systems and VAV systems. This ECM proposes to convert existing constant volume AHUs AH-1, AH-4, AH-5, AH-10, and AH-15 to single zone VAV units. The AHUs affected by the scope of this ECM are all equipped with CHW coils for cooling and HW coils for heating. The fan speeds would be controlled by space temperatures and return air \mathcal{CO}_2 levels. The new VAV systems will save energy on the fan motors due to reduced motor speeds and the Affinity Laws.

2.09 Upgrade Select Water Source Heat Pumps

The Barnegat Township School District buildings utilize a variety of HVAC equipment types to condition and ventilate spaces, one of which is water source heat pumps. This ECM recommends replacing select WSHPs with new, high efficiency units. This ECM would reduce the annual utility cost for conditioning spaces currently served by the older, inefficient WSHPs.

Building	Description						
Horbelt	Horbelt is conditioned by 61 WSHPs of varying ages, makes, models, capacities, and efficiencies. This ECM recommends replacing seven of the 61 WSHPs with new, high efficiency units. The targeted units serve the gymnasium, the stage, and some classrooms with calculated heating efficiencies ranging from 2.58 to 4.37 COP and cooling efficiencies ranging from 9.03 to 10.49 EER. The efficiencies were calculated using nameplate data, age, and NJBPU-approved* methodology for derating DX HVAC equipment efficiency based on age. The proposed replacement units have heating efficiencies ranging from 4.60 to 4.64 COP and cooling efficiencies ranging from 13.26 to 14.31 EER. The new WSHPs will save energy though the improved heating and cooling efficiencies.						
Brackman (Alternate ECM-3 Excluded from Cash Flow)	Brackman conditions and provides ventilation to the building's corridors through the use of eight AHUs. The CHW and HW coils in these AHUs are each fed by an individual water-to-water WSHPs. The existing WSHPs are Addison WWR360004A units, each with a cooling capacity of 3-tons. These units have not been in operation for approximately 10 years. The proposed units have a cooling capacity of 33.8 MBH with a cooling efficiency of 16.6 EER and a heating capacity of 38.4 MBH with a heating efficiency of 3.5 COP. This measure is a non-energy savings measure and will increase the energy consumption at Brackman. Since the units have not been used in nearly a decade, CHW and HW coil integrity will need to be checked during the design phase.						

^{*}See Pay for Performance Program Existing Buildings Partner Guidelines Version 4.4 FY20 (P4P EB Guidelines FY20) section 4.6.4.7 Derating HVAC Equipment Efficiency.

2.10 Convert AHUs w/ Electric Heat to Heating Hot Water

The Barnegat Township School District buildings utilize a variety of HVAC equipment types to condition and ventilate spaces, one of which is AHUs equipped with electric resistance coils for heating. This ECM recommends eliminating use of the electric resistance coil and instead installing and using a heating hot water coil.

Although electric heat is highly efficient, electricity costs more per unit energy than natural gas. This ECM would reduce the annual utility cost for conditioning spaces currently served by AHUs equipped with electric resistance coils.

Building	Description
Dunfee	Dunfee's cafeteria is conditioned by an RTU equipped with a 150 kW electric resistance heating coil heating. This ECM would keep the electric resistance coil in the unit, but disconnect it from service unless needed in an emergency. A heating hot water coil would be installed downstream of the unit in the ductwork of the mechanical room. The boilers are located in the room, so hot water piping is very close nearby. Piping would be extended to the coil located in the discharge ductwork. During the design phase, care will be needed to ensure flow is available from the existing pumps and that an additional booster pump is not needed.

2.13 Replace Mini-Split Units

The Barnegat Township School District buildings utilize a variety of HVAC equipment types to condition and ventilate spaces, one of which is mini-split systems. This ECM recommends replacing select mini-splits with new, high efficiency units. This ECM would reduce the annual utility cost for conditioning spaces currently served by the older, inefficient mini-splits.

Building	Description
High School	The High School uses two mini-split units as supplemental cooling equipment. The units were installed in 2003 and serve separate rooms. One unit has a rated cooling capacity of 0.75 tons and the 3.0 tons. The calculated efficiencies for the 0.75-ton unit and the 3.0-ton unit are 1.3 kW/ton and 1.4 kW/ton, respectively. The efficiencies were calculated using nameplate data, age, and NJBPU-approved* methodology for derating DX HVAC equipment efficiency based on age. This ECM recommends replacing the mini-split units with new high efficiency units. The 0.75-ton and 3.0-ton proposed replacement units both have an efficiency of 0.8 kW/ton. The new mini-split units will save energy though the improved cooling efficiencies.

^{*}See Pay for Performance Program Existing Buildings Partner Guidelines Version 4.4 FY20 (P4P EB Guidelines FY20) section 4.6.4.7 Derating HVAC Equipment Efficiency.

2.14 Exhaust Fan Controls Upgrade

The Barnegat Township School District buildings utilize a variety of HVAC equipment types to condition and ventilate spaces, one of which is exhaust fans (EFs). Some of the exhaust fans are equipped with constant speed permanent split capacitor (PSC) motors that operate 24/7 year-round. This ECM recommends replacing these EFs with new higher efficiency EFs equipped with direct drive electrically commutated (EC) motors and adding operating schedules to reduce runtimes. This ECM would reduce the annual electric utility cost for operating the EFs.

Building	Description
Dunfee	Dunfee's building exhaust is provided by nine roof mounted, belt driven EFs equipped with fractional horsepower PSC motors, which are rated at an average efficiency of 60%. The units serve restrooms, the kitchen, and general exhaust in the building. They operate 24 hours a day, 365 days of the year. This measure evaluates the savings associated with replacing the nine existing EFs with new higher efficiency EFs that are equipped with direct drive EC motors, which are rated at an average efficiency of 90%. This measure also evaluated adding an operating schedule to reduce EF runtimes.
Donahue	Donahue's building exhaust is provided by eight roof mounted, belt driven EFs equipped with fractional horsepower PSC motors, which are rated at an average efficiency of 60%. The units serve restrooms, the kitchen, and general exhaust in the building. They operate 24 hours a day, 365 days of the year. This measure evaluates the savings associated with replacing the eight existing EFs with new higher efficiency EFs that are equipped with direct drive EC motors, which are rated at an average efficiency of 90%. This measure also evaluated adding an operating schedule to reduce EF runtimes.

2.15 Replace Cooling Tower

The Barnegat Township School District buildings utilize a variety of equipment to reject heat during the cooling season, one of which is cooling towers. This ECM recommends replacing select cooling towers with new, high efficiency units. This ECM would reduce the annual utility cost for rejecting heat from conditioned spaces.

Building	Description
Horbelt (Alternate ECM-2 Included in Cash Flow)	Horbelt is conditioned by 61 WSHPs that are served by a single heat pump loop (HPL). The HPL receives heat from the boiler plant during the heating season and rejects heat through a closed circuit, centrifugal fan cooling tower during the cooling season. The existing cooling tower was installed in 2001 and has a maximum condenser water flowrate of 549 GPM and is equipped with two 30 HP fans on VFDs. The calculated efficiency of the existing cooling tower is 9.15 GPM/HP. This ECM recommends replacing the existing tower with a VFD equipped, high efficiency, closed circuit, axial fan cooling tower with a calculated efficiency of 21.96 GPM/HP. The new cooling tower will save energy though more efficient heat rejection.

2.17 Replace Air Cooled Chiller

The Barnegat Township School District buildings utilize a variety of HVAC equipment types to condition spaces, one of which is air cooled chillers. This ECM recommends replacing an existing air-cooled chiller at the High School with a new, high efficiency units. This ECM would reduce the annual utility cost for conditioning spaces during the cooling season.

Building	Description
High School	The High School's chilled water is generated using a 150-ton air-cooled chiller that was installed in 2007. In 2019 the chiller had two if its six compressors fail and require replacement, along with a new control board. The chiller's calculated efficiency is 1.35 kW/ton. The efficiencies were calculated using nameplate data, age, and NJBPU-approved* methodology for derating DX HVAC equipment efficiency based on age. This ECM recommends replacing the air-cooled chiller with a new, high efficiency unit. The proposed chiller would be a 150-ton air-cooled chiller with a full load efficiency of 1.20

Building	Description
	kW/Ton. The new chiller will save energy through more efficient compressors and controls.

HVAC Systems Measures Summary

The following table summarizes the HVAC System measures at a district level.

	District Wide HVAC Systems Measures Summary											
Item	Name	kW Savings (kW)	kWh Savings (kWh)	Therm Savings (Therms)	Utility Savings (\$)	O&M Savings (\$)		Total Savings (\$) (Energy + O&M)		Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes
2.01	Replace Boilers, optimization controls	0.0	0	7,421	7,995	0	23,749	7,995	758,967	94.9	92.0	
2.02	DHW Boiler Upgrade	0.0	0	702	773	500	2,246	1,273	38,114	49.3	28.2	
2.03	DHW Tankless System Conversion	0.0	0	166	175	0	530	175	10,611	60.8	57.8	
2.04	DHW Heater Electric to a Natural Gas Conversion	0.9	8,232	-193	658	0	2,634	658	26,779	40.7	36.7	
2.05	Install VFDs on Pumps	1.0	2,959	0	361	0	947	361	16,280	45.1	42.4	
2.06	Install VFDs on AHU Fans	32.9	170,595	1,520	20,645	0	59,454	20,645	188,172	9.1	6.2	
2.09	Upgrade Select WSHPs	19.8	13,989	0	2,784	0	4,476	2,784	183,131	65.8	64.2	
2.10	Convert AHUs w/ Electric Heat to Hydronic Heat	0.0	45,748	-1,951	3,862	0	14,639	3,862	33,293	8.6	4.8	
2.13	Replace Mini-Split Units	0.0	960	0	109	0	307	109	14,368	131.3	128.5	
2.14	Exhaust Fan Controls Upgrade	0.0	26,851	0	3,315	0	8,592	3,315	21,321	6.4	3.8	
2.15	Replace Cooling Tower	11.1	4,348	0	1,221	0	1,391	1,221	245,865	201.4	200.2	
	Total (recommended measures)	65.8	273,681	7,665	41,897	500	118,966	42,397	1,536,901	36.3	33.4	

4.3 Controls Measures

3.01 Control Systems Upgrades

Includes Demand Control Ventilation, Occupancy Sensor Control, and Scheduling Optimization

Demand control ventilation (DCV) allows for OA ventilation to be reduced beyond conventional rates through the monitoring of CO_2 . This ECM recommends DCV be implemented on select units. It also recommends installing occupancy sensors in the space to close the OA damper, reduce fan speed (if applicable), and go into setback mode if occupancy is not sensed.

The reduction in OA ventilation and fan energy would reduce the required energy required to meet space conditioning requirements.

Please note that with the exception of Donahue, this ECM carries the cost of upgrading the control system in each building. For Donahue, this cost is included in ECM-3.03. Where possible, scheduling optimization through the improved control system was also included in these savings.

Building	Description
Collins	This ECM recommends controlling the OA damper position on certain AHUs based on room \mathcal{CO}_2 levels. It will also shut the units off completely if the spaces are unoccupied, as determine through occupancy sensors. If shutting off the units is too aggressive, just the OA damper would be shut during unoccupied times. This ECM only looks at units serving large, open spaces that function as a single zone. Therefore, the units serving classrooms and the main office are not included.
High School	This ECM proposes the installation of ${\it CO}_2$ sensors in the new gymnasium spaces that are served by units Gym RTU-1 and Gym RTU-2 to allow for reduced outdoor air flows based on indoor ${\it CO}_2$ levels when conditions allow. This will result in both heating and cooling savings for the school as the existing units are constant volume units. This ECM interacts with the boiler replacements and the proposed boiler efficiency has been considered in the savings calculations.
Horbelt	This ECM proposes the installation of \mathcal{CO}_2 sensors in the gymnasium, cafeteria, media center, music room, and stage spaces to allow for OA ventilation rates to be reduced when indoor \mathcal{CO}_2 levels allow it. This will result in both heating and cooling savings for the school as the existing units are constant volume units. This ECM interacts with the boiler replacements and the proposed boiler efficiency has been considered in the savings calculations.
Dunfee	This ECM proposes the installation of \mathcal{CO}_2 sensors in the gymnasium to allow for OA ventilation rates to be reduced when indoor \mathcal{CO}_2 levels allow it. There are (2) packaged rooftop units with DX cooling and gas heating, with heat recovery wheels that currently serve the gym. This will result in both heating and cooling savings for the school as the existing units are constant volume units.
Brackman	This ECM proposes the installation of ${\it CO}_2$ sensors in the auxiliary gymnasium spaces to allow for OA ventilation rates to be reduced when indoor ${\it CO}_2$ levels allow it. This will result in both heating and cooling savings for the school as the existing units are constant volume units. This ECM interacts with the boiler replacements and the proposed boiler efficiency has been considered in the savings calculations.

3.02 Install Walk-In Refrigerator/Freezer Controls

Walk-in refrigerators and freezers are commonplace in facilities where large amounts of perishables need to be stored. Each building in the BTSD has at least one walk-in refrigerator and one walk-in freezer. Walk-in refrigerator and walk-in freezer compressor controls and evaporator fan controls will reduce equipment run times while still ensuring refrigerator and freezer temperatures are maintained. This ECM recommends the installation of controls on the walk-in refrigerator and walk-in freezer compressors and evaporator fans. The reduced equipment run times would decrease the energy consumed by the walk-in refrigerators and walk-in freezers.

Building	Description
Collins	Collins contains one walk-in cooler and one walk in freezer. The existing evaporator fans are equipped with standard pole shaded motors that run 24/7 with no means of control. This measure evaluates the savings associated with replacing the existing evaporator fan motors with high efficiency EC motors as well as installing controls. The EC motors will save energy and the controls will reduce evaporator fan runtime. The controls will also reduce compressor and condenser runtimes by an estimated 5%. These savings are calculated using NJBPU protocols.
High School	The High School contains one walk-in cooler and one walk in freezer. The existing evaporator fans are equipped with standard pole shaded motors that run 24/7 with no means of control. This measure evaluates the savings associated with replacing the existing evaporator fan motors with high efficiency EC motors as well as installing controls. The EC motors will save energy and the controls will reduce evaporator fan runtime. The controls will also reduce compressor and condenser runtimes by an estimated 5%. These savings are calculated using NJBPU protocols.
Horbelt	Horbelt contains one walk-in cooler and one walk in freezer. The existing evaporator fans are equipped with standard pole shaded motors that run 24/7 with no means of control. This measure evaluates the savings associated with replacing the existing evaporator fan motors with high efficiency EC motors as well as installing controls. The EC motors will save energy and the controls will reduce evaporator fan runtime. The controls will also reduce compressor and condenser runtimes by an estimated 5%. These savings are calculated using NJBPU protocols.
Donahue	Donahue contains one walk-in cooler and one walk in freezer. The existing evaporator fans are equipped with standard pole shaded motors that run 24/7 with no means of control. This measure evaluates the savings associated with replacing the existing evaporator fan motors with high efficiency EC motors as well as installing controls. The EC motors will save energy and the controls will reduce evaporator fan runtime. The controls will also reduce compressor and condenser runtimes by an estimated 5%. These savings are calculated using NJBPU protocols.
Dunfee	Dunfee contains one walk-in cooler and one walk in freezer. The existing evaporator fans are equipped with standard pole shaded motors that run 24/7 with no means of control. This measure evaluates the savings associated with replacing the existing evaporator fan motors with high efficiency EC motors as well as installing controls. The EC motors will save energy and the controls will reduce evaporator fan runtime. The controls will also reduce compressor and condenser runtimes by an estimated 5%. These savings are calculated using NJBPU protocols.
Brackman	Brackman contains one walk-in cooler and one walk in freezer. The existing evaporator fans are equipped with standard pole shaded motors that run 24/7 with no means of control. This measure evaluates the savings associated with replacing the existing evaporator fan motors with high efficiency EC motors as well as installing controls. The EC motors will save energy and the controls will reduce evaporator fan runtime. The

controls will also reduce compressor and condenser runtimes by an estimated 5%. These savings are calculated using NJBPU protocols.

3.03 Install Kitchen Hood Controls

Kitchen hood EFs without controls are manually operated via local switches and are typically left on during kitchen hours. Kitchen hood EF controls monitor the exhaust air combustibles and stovetop usage to control the kitchen hood EF speeds and run times. This ECM recommends that controls be installed on the kitchen hood EFs. The reduced runtimes resultant of the controls would decrease the energy consumed by the kitchen hood EFs.

Building	Description
Collins	Collins' kitchen hood EF is powered by a 0.75 HP fan, 2,000 CFM fan that is manually operated and runs from 7AM to 3PM when the kitchen is occupied. This ECM recommends that controls be installed on the kitchen hood EF. Makeup air is provided by a nearby outside air/return air AHU that provides ventilation to the cafeteria and kitchen. The OA damper on the AHU would adjust its position based on the EF operation. The reduced ventilation and reduced fan energy will result in energy savings.
Horbelt	Horbelt's kitchen hood EF is powered by a 0.25 HP, 1,140 CFM fan that is manually operated and runs from 7AM to 3PM when the kitchen is occupied. This ECM recommends that controls be installed on the kitchen hood EF. Makeup air is provided by a heat pump serving the kitchen area that takes in outside air. The OA damper on the heat pump would adjust its position based on the EF operation. The reduced ventilation and reduced fan energy will result in energy savings.
Donahue	Donahue's kitchen hood EF is powered by a 0.75 HP, 2,000 CFM fan that is manually operated and runs from 7AM to 3PM when the kitchen is occupied. This ECM recommends that controls be installed on the kitchen hood EF. Makeup air is provided by a heat pump serving that takes in outside air. The OA damper on the heat pump would adjust its position based on the EF operation. The reduced ventilation and reduced fan energy will result in energy savings. The cost for this upgrade also includes the cost of upgrading the building management system.
Dunfee	Dunfee's kitchen hood EF is powered by a 1.0 HP, 3,656 CFM fan that is manually operated and runs from 7AM to 3PM when the kitchen is occupied. This ECM recommends that controls be installed on the kitchen hood EF. Makeup air is provided by a nearby outside air/return air AHU that provides ventilation to several spaces including the kitchen. The OA damper on the AHU would adjust its position based on the EF operation. The reduced ventilation and reduced fan energy will result in energy savings.

3.04 Kitchen Hood Controls Optimization

Kitchen hood EFs with controls that are manually overridden are operated inefficiently and unnecessarily increase fan and ventilation energy. This ECM recommends that the manual override placed on the kitchen hood EF controls be turned off and the controls reset to automatic operation.

Building	Description
High School	The High School has a 5 HP exhaust fan on the kitchen hood and a dedicated makeup air unit with a 3 HP fan motor. Both fans are currently controlled by a Melink system but have been manually overridden to operate at 100% when on. This ECM proposes to implement a control sequence on the existing Melink controls so that both the 5 HP exhaust fan and 3 HP makeup fan run at variable speeds based on heat and smoke levels. Resetting the controls to automatic operation will reduce runtimes and, in turn, would decrease the energy consumed by the kitchen hood EFs.

3.08 Add Occupancy-Based Controls to the Vending Machines

Vending machines are seldomly turned off, especially refrigerated beverage and refrigerated snack vending machines. Occupancy-based controls allow for vending machines to turn off lighting and reduce refrigerator runtimes when the area around the units is vacant. The reduction in lighting and refrigerator runtimes would reduce the energy consumed by the vending machines.

Building	Description
Collins	Per the LGEA, Collins has 1 refrigerated beverage vending machine and 2 non-refrigerated snack vending machines. This ECM recommends the installation of vending machine controls. Controls would reduce the energy consumed by the vending machines.
High School	The high school has 5 refrigerated beverage vending machines, 3 refrigerated glass-front coolers, and 2 non-refrigerated snack vending machines. This ECM recommends the installation of vending machine controls. Controls would reduce the energy consumed by the vending machines.
Horbelt	Horbelt has 1 refrigerated beverage vending machine and 2 non-refrigerated snack vending machines. This ECM recommends the installation of vending machine controls. Controls would reduce the energy consumed by the vending machines.
Donahue	Donahue has 2 refrigerated beverage vending machines. This ECM recommends the installation of vending machine controls. Controls would reduce the energy consumed by the vending machines.
Dunfee	Per the LGEA, Dunfee has 1 refrigerated beverage, and two non-refrigerated snack vending machines. This ECM recommends the installation of vending machine controls. Controls would reduce the energy consumed by the vending machines.
Brackman	Brackman has 2 refrigerated beverage vending machines, 3 refrigerated glass-front coolers, and 1 non-refrigerated snack vending machine. This ECM recommends the installation of vending machine controls. Controls would reduce the energy consumed by the vending machines.

Controls Measures Summary

The following table summarizes the Controls measures at a district level. Please note that the controls upgrade cost is included in ECM-3.01 for all schools except Donahue. For Donahue, the controls upgrade cost is included in ECM-3.03.

	District Wide Controls Measures Summary											
Item	Name	kW Savings (kW)	kWh Savings (kWh)	Therm Savings (Therms)	Utility Savings (\$)	O&M Savings (\$)		Total Savings (\$) (Energy + O&M)	•	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes
3.01	Controls Systems Upgrades	6.5	221,366	5,969	32,743	0	89,937	32,743	1,207,607	36.9	34.1	
3.02	Install Walk-In Refrigerator/Freezer Controls	2.7	49,219	0	5,142	0	15,750	5,142	50,484	9.8	6.8	
3.03	Install kitchen hood controls	3.0	15,392	487	2,439	0	6,485	2,439	250,048	102.5	99.9	
3.04	Kitchen hood controls optimization	0.0	4,417	789	1,355	0	3,937	1,355	8,954	6.6	3.7	
3.08	Add occupancy-based controls to the Vending Machines	3.3	28,993	0	3,123	0	5,051	3,123	10,102	3.2	1.6	
Total (recommended measures)			319,388	7,245	44,802	0	121,161	44,802	1,527,197	34.1	31.4	

4.4 Water Measures

4.01 Install Low Flow Aerators

Most faucets installed in the last 5 to 10 years are rated between 1.5 GPM and 2.0 GPM. Low flow aerators can reduce faucet flowrates to as low as 0.5 GPM without replacing the entire faucet. This ECM recommends the installation of low flow aerators on existing faucets. The aerators would decrease the domestic water consumption. Please note that sewer costs are fixed for the schools and would not decrease with the reduction in water usage.

Building	Description
Collins	Collins has 22 faucets in the building. The flowrate of the existing faucets is, on average, 1.5 GPM. This ECM recommends the installation of low flow aerators to reduce the faucets' flowrate to 0.5 GPM. The aerators would decrease the domestic water consumption.
High School	The High School has 102 faucets and lab/slop sinks in the building. The flowrate of the existing faucets is, on average, 1.5 GPM. This ECM recommends the installation of low flow aerators to reduce the faucets' flowrate to 0.5 GPM. The aerators would decrease the domestic water consumption.
Horbelt	Horbelt has 47 faucets in the building. The flowrate of the existing faucets is, on average, 1.5 GPM. This ECM recommends the installation of low flow aerators to reduce the faucets' flowrate to 0.5 GPM. The aerators would decrease the domestic water consumption.
Donahue	Donahue has 40 faucets in the building. The flowrate of the existing faucets is, on average, 1.9 GPM. This ECM recommends the installation of low flow aerators to reduce the faucets' flowrate to 0.5 GPM. The aerators would decrease the domestic water consumption.
Dunfee	Brackman has 25 faucets in the building. The flowrate of the existing faucets is, on average, 2.0 GPM. This ECM recommends the installation of low flow aerators to reduce the faucets' flowrate to 0.5 GPM. The aerators would decrease the domestic water consumption.
Brackman	Brackman has 102 faucets in the building. The flowrate of the existing faucets is, on average, 1.5 GPM. This ECM recommends the installation of low flow aerators to reduce the faucets' flowrate to 0.5 GPM. The aerators would decrease the domestic water consumption.

Water Measures Summary

The following table summarizes the Water measures at a district level.

	District Wide Water Measures Summary											
Item	Name	kW Savings (kW)	kWh Savings (kWh)	Therm Savings (Therms)	Utility Savings (\$)	O&M Savings (\$)		Total Savings (\$) (Energy + O&M)		Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes
4.01	Install Low Flow Aerators	0.0	0	0	4,623	0	0	4,623	13,512	2.9	2.9	
Total	(recommended measures)	0.0	0	0	4,623	0	0	4,623	13,512	2.9	2.9	

4.5 Building Management Systems Upgrades

The Barnegat Township School District's existing digital direct control (DDC) systems are outdated and, in some cases, have limited capabilities. This ESP recommends that new, updated controls be installed at BTSD to ensure that all HVAC system measures, and controls measures can be successfully implemented and operated effectively and efficiently. These costs are carried in ECM-3.01 for all schools except Donahue. For Donahue, these costs are carried in ECM-3.03.

4.6 Combined Heat & Power

Please note that in order to be eligible for a 20 year project term, combined heat and power (CHP) needs to be included in this project. We have recommended that a 35 kW unit be included in the boiler room of the High School. It should run as a thermal-following unit, so that when there is either sufficient heating hot water load or domestic hot water load, it is operating. During the summer, its runtime will be minimal. The 35 kW unit consumes 407 MBH of natural gas while operating, and puts out approximately 204 MBH of waste heat that can be utilized towards building thermal loads.

The annual cost savings are projected to be about \$5,071. With an expected \$1,562 annual O&M expenditure, the net savings are about \$3,509. The total capital cost is expected to be \$333,593.

5.0 Renewable Energy

Annual Cost (\$)

% of Annual Electricity Cost**

Barnegat Township School District has existing renewable energy facilities (renewables) in the form of rooftop mounted PV panels. The PV panels were installed in 2012 and produce electricity that Barnegat purchases under an ongoing PPA. The PV panels are owned and operated by TerraForm Power (TERP), which was acquired by Brookfield in 2017 and who now holds the PPA. The current PPA has a 15-year term and is set to expire in 2027. The table below summarizes BTSD's existing PV electric capacity, electricity generation, the PPA electricity rates (\$/kWh) for each school.

Brackman Donahue Collins Electric Utility Consumption Rate 0.1201 0.0967 0.0967 0.0974 0.0978 0.0965 (\$/kWh) PP Rate (\$/kWh) 0.1259 0.1259 0.1259 0.1259 0.1259 0.1259 DC Capacity (kW) 280.80 368.16 40.56 177.84 184.08 365.04 Annual Generation (kWh) 350,556 454,417 45,812 239,023 224,121 462,149 % of Annual Electricity Consumption* 49% 17% 6% 29% 38% 26%

Table 11: BTSD Existing PV Summary

44,135

The PV electricity rate stipulated under the existing PPA between BTSD and Brookfield, \$0.1259 per kWh generated, is greater than the electricity consumption rates at all six schools. At the aforementioned rate. BTSD is paying more for electricity generated by the existing PV than for electricity purchased from the grid.

57,211

18%

5,768

7%

30,093

31%

28,217

37%

58,185

27%

CHA has evaluated multiple options that would improve BTSD's PV economics. The best available option, proposed by EZNergy, is to install carport mounted PV panels under a new PPA with an electricity rate of \$0.0450 per kWh generated. The additional PV capacity would increase the amount of onsite PV electricity generation and reduce the amount of electricity purchased from the grid. The combination of the additional PV with the lower PPA rate will result in an average electricity PV rate that is lower than the electric utility consumption rate.

The table below summarizes BTSD's PV systems if the aforementioned PV system and PPA are implemented in conjunction with the ECMs proposed in section 4.0. Please note that some of the generation values recommended by EZNergy were lowered to avoid producing more electric than any of the schools would consume.

^{46%} *Annual consumption is comprised of electricity generated by the PV panels and delivered by the electric utility company.

^{**}Annual cost is comprised of the PPA cost and BTSD's electric utility cost.

Table 12: BTSD Proposed PV Summary

		Collins	High School	Horbelt	Donahue	Dunfee	Brackman
Existing	DC Capacity (kW)	280.80	368.16	40.56	177.84	184.08	365.04
Exis	Annual Generation (kWh)	350,556	454,417	45,812	239,023	224,121	462,149
Additional	DC Capacity (kW)	242.40	1,392.00	254.40	261.60	204.80	472.00
Addit	Annual Generation (kWh)	216,765	1,162,266	322,070	302,187	174,539	601,190
	DC Capacity (kW)	523.20	1,760.16	294.96	439.44	388.88	837.04
otal	Annual Generation (kWh)	567,321	1,616,682	367,882	541,210	398,661	1,063,339
Proposed Total	% of Annual Electric Consumption*	86%	76%	60%	81%	84%	69%
Pro	Annual PV Cost (\$)	53,787	109,380	20,248	43,691	36,071	85,238
	% of Annual Electric Cost**	73%	55%	37%	65%	64%	54%

^{*}Annual consumption is comprised of electricity generated by the PV panels and delivered by the electric utility company.
**Annual cost is comprised of the PPA cost and BTSD's electric utility cost.

6.0 Financial Analysis

6.1 Overview

While the LGEA included preliminary installation costs, this ESP provides more refined savings and cost estimates based on preliminary design concepts. IGA-level implementation cost estimates were prepared in consultation with various vendors and through prior experience.

The following financial analysis includes a review of All ECMs that have been included as part of the BTSD ESP.

The following items are part of this financial overview.

- Demand Response Overview of demand response and curtailable services form the PJM Independent System Operator. Please note that BTSD already participates and no additional demand response activity is recommended.
- Operation & Maintenance Overview of O&M savings associated with recommended ECMs
- Incentives Overview of New Jersey Smart Start Program incentives associated with recommended ECMs
- Simple Payback Overview of costs, savings and payback associated with recommended ECMs. Measures are evaluated individually and by school and include O&M savings and incentives.
- Financial Cash Flow A 20-year cash flow analysis, including costs, savings and financing for recommended ECMs identified in this ESP.

See Appendix D for additional Financial Analysis details.

6.2 Demand Response

Demand Response is a consumer's ability to reduce electricity consumption at their location when wholesale prices are high, or the reliability of the electric grid is threatened. PJM Interconnection is a regional transmission organization (RTO) that coordinates the movement of wholesale electricity in all or parts of 13 states and the District of Columbia. Acting as a neutral, independent party, PJM operates a competitive wholesale electricity market and manages the high-voltage electricity grid to ensure reliability for more than 51 million people. In PJM's Energy Market, enduse customers participate in demand response by reducing their electricity use either during an emergency event or when locational marginal prices (LMPs) are high on the PJM system. Enduse customers participate in demand response in PJM through members called curtailment service providers (CSPs), who act as agents for the customers.

The Barnegat Township School District currently participates in demand response programs. Therefore, no further demand response activities are recommended. PJM costs and revenues have not been included as part of this ESP.

6.3 Operation and Maintenance

Operation and Maintenance (O&M) and other energy-related cost savings that result in reductions in expenses (other than energy cost savings) related to energy and water consuming equipment, are allowable under ESIP.

Energy-related cost savings can result from avoided expenditures for operations, maintenance, equipment repair, or equipment replacement due to the project. This includes capital funds for projects (e.g., equipment replacement) that, because of the project, will not be necessary. Sources of energy-related savings include:

- avoided current or planned capital expense
- transfer of responsibility for O&M and/or R&R to the contractor, and
- avoided renovation, renewal, or repair costs as a result of replacing old and unreliable equipment.

Methods for estimating O&M savings resulting from changes to equipment have not been developed under the ESP Implementation Guidelines, however as a rule, any savings claimed from O&M activities must result in a real decrease in expenditures.

Operation and maintenance savings have not been included as part of this ESP. The exclusion of O&M savings is due to lack of detailed documentation to identify and justify accurate O&M savings resultant of the recommended ECMs. An O&M loss has been included to account for the additional O&M requirements of the proposed CHP system.

6.4 Incentives

Some of the ECMs recommend in this ESP are eligible for NJBPU's SmartStart Incentive Program. This program provides incentives for pre-approved mechanical and electrical equipment replacements, as well as pre-approved custom measures. The program covers a wide variety of ECMs, including chillers, boilers, VFDs, unitary HVAC equipment, and lighting retrofits/upgrades. Each incentive must be applied for and approved by the NJBPU (or corresponding utility program) prior to the installation of the equipment. Incentive payments are made to the owner after the equipment is fully installed and paid for. CHA estimated incentives for the recommended ECMs using application forms from the NJCEP website. The lighting upgrades and lighting controls incentives were estimated using the prescriptive lighting application form and the lighting controls application form. All other ECM incentives were estimated using the custom application form. Since the BTSD buildings are "K-12" facilities, BTSD is eligible for Enhanced Incentives under the SmartStart Incentive Program. CHA will be applying for SmartStart incentives for all eligible ECMs on behalf of BTSD. Please note that the incentives included in this report are estimates and not guaranteed. Incentives cannot be locked in until the SmartStart applications have been approved by the SmartStart program manager.

CHA assessed the NJBPU's Pay for Performance (P4P) program and does not recommend BTSD pursue participation. The P4P program incentives are dispersed in three payments over time, with only two of the three payments being guaranteed. The third payment is performance based, with a cap, and is only paid out after a 12-month M&V has been completed. The performance requirement presents the risk of BTSD receiving only a portion of the third payment if saving goals are not met with no opportunity to increase the third payment if savings goals are exceeded. In addition to payments being dispersed over time, P4P requires that all participating facilities must have a peak electric demand of 200 kW or greater within the last 12 months. This qualifier eliminates the participation of Collins and Dunfee given the last 12 months of utility data. Horbelt

and Donahue are also at risk of ineligibility if their electric demand drops by less than 10% within the next 12 months. Overall, despite the fact that P4P has higher incentives than the other NJBPU programs, it has a high risk of a reduced incentive if performance targets aren't met. For these reasons, CHA does not recommend BTSD pursue participation in the P4P program.

6.5 Simple Payback Analysis

The tables below provide summaries of the calculated savings, implementation costs, operation & maintenance savings, incentives, and payback for each measure. The additional proposed PV for each building has also been included.

					District Wide	Summary							
Item	Name	kW Savings (kW)	kWh Savings (kWh)	Therm Savings (Therms)	Water Savings (kGal)	Utility Savings (\$)	O&M Savings (\$)	Incentives (\$)	Total Savings (\$) (Energy + O&M)	Implementation Cost (\$)	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes
1.01	Convert all interior lighting to LED lighting	255.2	512,506	0	0	68,513	0	129,108	68,513	1,082,118	15.8	13.9	
1.02	Install occupancy/daylight/dimming controls	0.0	25,588	0	0	3,140	0	16,226	3,140	44,333	14.1	8.9	
1.03	Convert all exterior lighting to LED lighting and install control	24.4	116,581	0	0	13,417	0	68,342	13,417	150,215	11.2	6.1	
2.01	Replace Boilers, optimization controls	0.0	0	7,421	0	7,995	0	23,749	7,995	758,967	94.9	92.0	
2.02	DHW Boiler Upgrade	0.0	0	702	0	773	500	2,246	1,273	38,114	49.3	28.2	
2.03	DHW Tankless System Conversion	0.0	0	166	0	175	0	530	175	10,611	60.8	57.8	
2.04	DHW Heater Electric to a Natural Gas Conversion	0.9	8,232	-193	0	658	0	2,634	658	26,779	40.7	36.7	
2.05	Install VFDs on Pumps	1.0	2,959	0	0	361	0	947	361	16,280	45.1	42.4	
2.06	Install VFDs on AHU Fans	32.9	170,595	1,520	0	20,645	0	59,454	20,645	188,172	9.1	6.2	
2.09	Upgrade Select WSHPs	19.8	13,989	0	0	2,784	0	4,476	2,784	183,131	65.8	64.2	
2.10	Convert AHUs w/ Electric Heat to Hydronic Heat	0.0	45,748	-1,951	0	3,862	0	14,639	3,862	33,293	8.6	4.8	
2.13	Replace Mini-Split Units	0.0	960	0	0	109	0	307	109	14,368	131.3	128.5	
2.14	Exhaust Fan Controls Upgrade	0.0	26,851	0	0	3,315	0	8,592	3,315	21,321	6.4	3.8	
2.15	Replace Cooling Tower	11.1	4,348	0	0	1,221	0	1,391	1,221	245,865	201.4	200.2	
2.17	Replace Air Cooled Chiller	18.9	22,841	0	0	3,625	0	7,309	3,625	203,855	56.2	54.2	
3.01	Controls Systems Upgrades	6.5	221,366	5,969	0	32,743	0	89,937	32,743	1,207,607	36.9	34.1	
3.02	Install Walk-In Refrigerator/Freezer Controls	2.7	49,219	0	0	5,142	0	15,750	5,142	50,484	9.8	6.8	
3.03	Install kitchen hood controls	3.0	15,392	487	0	2,439	0	6,485	2,439	250,048	102.5	99.9	
3.04	Kitchen hood controls optimization	0.0	4,417	789	0	1,355	0	3,937	1,355	8,954	6.6	3.7	
3.08	Add occupancy-based controls to the Vending Machines	3.3	28,993	0	0	3,123	0	5,051	3,123	10,102	3.2	1.6	
4.01	Install Low Flow Aerators	0.0	0	0	754	4,623	0	0	4,623	13,512	2.9	2.9	
	Total (recommended measures)	379.6	1,270,584	14,910	754	180,017	500	461,112	180,517	4,558,131	25.3	22.7	
		Peak kW (kW)	kWh Generated (kWh)	Therm Generated (Therms)	Utility Savings (\$)	O&M Savings (\$)	Incentives (\$)	Total Savings (\$) (Energy + O&M)	Implementation Cost (\$)	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes	
	PV Totals	1,649.9	4,555,096	0	149,034	0	0	149,034					_]
		kW Savings (kW)	kWh Savings (kWh)	Therm Savings (Therms)	Utility Savings (\$)	O&M Savings (\$)	Incentives (\$)	Total Savings (\$) (Energy + O&M)	Implementation Cost (\$)	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes	
	Building Total After PV	379.6	1,270,584.4	14,910	149,788	180,017	500	610,146	180,517	0.3	0.3		

				Cecil S	. Collins Elementa	ry School and Boa	rd Offices						
ltem	Name	kW Savings (kW)	kWh Savings (kWh)	Therm Savings (Therms)	Water Savings (kGal)	Utility Savings (\$)	O&M Savings (\$)	Incentives (\$)	Total Savings (\$) (Energy + O&M)	Implementation Cost (\$)	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes
2.03	DHW Tankless System Conversion	0.0	0	166	0	175	0	530	175	10,611	60.8	57.8	
3.01	Controls Systems Upgrades	4.9	43,625	3,830	0	9,837	0	26,217	9,837	205,003	20.8	18.2	
3.02	Install Walk-In Refrigerator/Freezer Controls	0.3	5,729	0	0	738	0	1,833	738	8,172	11.1	8.6	
3.03	Install kitchen hood controls	0.3	6,919	0	0	886	0	2,214	886	19,368	21.9	19.4	
3.08	Add occupancy-based controls to the Vending Machines	0.3	2,297	0	0	306	0	586	306	1,172	3.8	1.9	
4.01	Install Low Flow Aerators	0.0	0	0	119	794	0	0	794	1,259	1.6	1.6	
	Total (recommended measures)	5.7	58,570	3,996	119	12,736	0	31,381	12,736	245,586	19.3	16.8	
		Peak kW (kW)	kWh Generated (kWh)	Therm Generated (Therms)	Utility Savings (\$)	O&M Savings (\$)	Incentives (\$)	Total Savings (\$) (Energy + O&M)	Implementation Cost (\$)	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes	
	PV Totals	216.2	567,321	0	16,274	0	0	16,274					
	•												
		kW Savings (kW)	kWh Savings (kWh)	Therm Savings (Therms)	Utility Savings (\$)	O&M Savings (\$)	Incentives (\$)	Total Savings (\$) (Energy + O&M)	Implementation Cost (\$)	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes	
	Building Total After PV	5.7	58,570.2	3,996	29,010	0	31,381	29,010	245,586	8.5	7.4		

	Barnegat Township High School												
ltem	Name	kW Savings (kW)	kWh Savings (kWh)	Therm Savings (Therms)	Water Savings (kGal)	Utility Savings (\$)	O&M Savings (\$)	Incentives (\$)	Total Savings (\$) (Energy + O&M)	Implementation Cost (\$)	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes
1.01	Convert all interior lighting to LED lighting	105.1	174,088	0	0	24,734	0	45,456	24,734	423,681	17.1	15.3	
1.03	Convert all exterior lighting to LED lighting and install contro	11.3	49,489	0	0	5,644	0	28,142	5,644	41,903	7.4	2.4	
2.01	Replace Boilers, optimization controls	0.0	0	5,405	0	5,838	0	17,297	5,838	443,333	75.9	73.0	
2.06	Install VFDs on AHU Fans	32.9	170,595	1,520	0	20,645	0	59,454	20,645	188,172	9.1	6.2	
2.13	Replace Mini-Split Units	0.0	960	0	0	109	0	307	109	14,368	131.3	128.5	
2.17	Replace Air Cooled Chiller	18.9	22,841	0	0	3,625	0	7,309	3,625	203,855	56.2	54.2	
3.01	Controls Systems Upgrades	0.0	109,872	1,021	0	13,628	0	38,426	13,628	363,821	26.7	23.9	
3.02	Install Walk-In Refrigerator/Freezer Controls	0.6	9,476	0	0	961	0	3,032	961	9,136	9.5	6.4	
3.04	Kitchen hood controls optimization	0.0	4,417	789	0	1,355	0	3,937	1,355	8,954	6.6	3.7	
3.08	Add occupancy-based controls to the Vending Machines	1.4	12,371	0	0	1,305	0	2,034	1,305	4,069	3.1	1.6	
4.01	Install Low Flow Aerators	0.0	0	0	203	1,201	0	0	1,201	5,388	4.5	4.5	
	Total (recommended measures)	170.2	554,109	8,735	203	79,045	0	205,395	79,045	1,706,679	21.6	19.0	
		Peak kW (kW)	kWh Generated (kWh)	Therm Generated (Therms)	Utility Savings (\$)	O&M Savings (\$)	Incentives (\$)	Total Savings (\$) (Energy +	Implementation Cost (\$)	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes	
	PV Totals	523.9	1,616,682	0	60,061	0	0	60,061					
		kW Savings (kW)	kWh Savings (kWh)	Therm Savings (Therms)	Utility Savings (\$)	O&M Savings (\$)	Incentives (\$)	Total Savings (\$) (Energy +	Implementation Cost (\$)	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes	
	Building Total After PV	170.2	554,109.0	8,735	139,106	0	205,395	139,106	1,706,679	12.3	10.8		
•													

The first Name Na		Robert L. Horbelt Elementary School												
1.02 Install occupancy/daylight/dimming controls	ltem	Name				3.		O&M Savings (\$)				Payback	Payback with O&M and Incentives (Yrs)	Notes
1.03 Convert all exterior lighting to LED lighting and install control 2.7 11,830 0 0 1,343 0 6,000 1,343 23,240 17.3 12.8	1.01	Convert all interior lighting to LED lighting	40.3	81,757	0	0	10,840	0	25,342	10,840	205,678	19.0	16.6	
2.04 DHW Heater Electric to a Natural Gas Conversion 0.5 4,671 -141 0 334 0 1,495 334 13,880 41.5 37.0 2.09 Upgrade Select WSHPS 19.8 13,989 0 0 0 2,784 0 4,476 2,784 183,131 65.8 64.2 2.15 Replace Cooling Tower 11.1 4,348 0 0 0 1,221 0 1,391 1,221 245,865 201.4 200.2 3.01 Controls Systems Upgrades 1.6 2,290 0 0 336 0 733 336 175,945 533.2 531.0 3.02 Install Walk-In Refrigerator/Freezer Controls 0.3 5,729 0 0 578 0 1,833 578 8,172 14.1 11.0 3.03 Install Kitchen hood controls 1.9 5,088 0 0 630 0 1,628 630 19,548 31.0 28.4 4.01 Install Low Flow Aerators 0.0 0 0 69 405 0 0 405 2,483 6.1 6.1 Total (recommended measures) 78.5 133,183 -141 69 18,851 0 46,971 18,851 885,601 47.0 44.5 Peak kW (kW) KWh Generated (kWh) Therm Generated (kWh) Therm Savings (s) (Therms) Utility Savings (s) (Energy + OxM) (Cost (s) (Yrs) (Yrs) (Yrs) KW Savings (kW) Savings (kWh Savings (kWh) Therm Savings (therms) Utility Savings (s) (Energy + OxM) (Cost (s) (Yrs)	1.02	Install occupancy/daylight/dimming controls	0.0	1,183	0	0	137	0	3,486	137	3,486	25.4	0.0	
2.09 Upgrade Select WSHPs	1.03	Convert all exterior lighting to LED lighting and install control	2.7	11,830	0	0	1,343	0	6,000	1,343	23,240	17.3	12.8	
2.15 Replace Cooling Tower			0.5	4,671	-141	0	334	0	1,495	334	13,880	41.5	37.0	
3.01 Controls Systems Upgrades	2.09	Upgrade Select WSHPs	19.8	13,989	0	0	2,784	0	4,476	2,784	183,131	65.8	64.2	
3.02 Install Walk-In Refrigerator/Freezer Controls 0.3 5,729 0 0 578 0 1,833 578 8,172 14.1 11.0			11.1		0	0		0						
3.03 Install kitchen hood controls 1.9 5,088 0 0 630 0 1,628 630 19,548 31.0 28.4 3.08 Add occupancy-based controls to the Vending Machines 0.3 2,297 0 0 242 0 586 242 1,172 4.8 2.4 4.01 Install Low Flow Aerators 0.0 0 0 69 405 0 0 405 2,483 6.1 6.1 Total (recommended measures) 78.5 133,183 -141 69 18,851 0 46,971 18,851 885,601 47.0 44.5 Peak kW (kW) KWh Generated (RWh) Therm Generated (RWh) Therms (\$) 0 0 0 16,664 0 0 16,664 Figure 1.02 Total Sawings (\$) Incentives (\$) Incentives (\$) Incentives (\$) Incentives (\$) Incentives (\$) Incentives (\$) Implementation (Payback with O&M and Incentives (\$) Incentives (\$) Incentives (\$) Incentives (\$) Implementation (Payback with O&M and Incentives (\$) Incentives (\$) Incentives (\$) Incentives (\$) Incentives (\$) Implementation (Payback with O&M and Incentives (\$) Incentives (\$) Incentives (\$) Incentives (\$) Incentives (\$) Implementation (Payback with O&M and Incentives (\$) Incentives (\$) Incentives (\$) Incentives (\$) Implementation (Payback with O&M and Incentives (\$) In	3.01	Controls Systems Upgrades	1.6	2,290	0	0	336	0		336	178,945	533.2	531.0	
3.08 Add occupancy-based controls to the Vending Machines 0.3 2,297 0 0 242 0 586 242 1,172 4.8 2.4 4.01 Install Low Flow Aerators 0.0 0 0 69 405 0 0 405 2,483 6.1	3.02	Install Walk-In Refrigerator/Freezer Controls	0.3	5,729	0	0			1,833		8,172	14.1		
A.01 Install Low Flow Aerators 0.0 0 69 405 0 0 405 2,483 6.1 6.1	3.03	Install kitchen hood controls	1.9	5,088	0	0	630	0	1,628	630	19,548	31.0	28.4	
Total (recommended measures) 78.5 133,183 -141 69 18,851 0 46,971 18,851 885,601 47.0 44.5	3.08	Add occupancy-based controls to the Vending Machines	0.3	2,297	0	0			586	242	1,172	4.8	2.4	
Peak kW kWh Generated (kWh) Wh Generated (kWh) (kW	4.01		0.0	0	0	69	405	0	0	405	2,483	6.1	6.1	
Peak kW KWh Generated (kWh) Therm Generated (kWh) (kWh) Therm Generated (kWh)		Total (recommended measures)	78.5	133,183	-141	69	18,851	0	46,971	18,851	885,601	47.0	44.5	
kW Savings (kWh) Therm Savings (kWh) Utility Savings (\$) O&M Savings (\$) Incentives (\$) (Energy + Cost (\$) Cost (\$) (Yrs) (Yrs)						, ,	O&M Savings (\$)		(\$) (Energy +			O&M and Incentives	Notes	
kW Savings (kWh Savings (kWh) (kWh) (Therms) (\$) (\$) (\$) (Energy + O&M) (\$) (\$) (Energy + O&M) (Yrs) (Yrs) (Yrs)		PV Totals	110.8	367,882	0	16,664	0	0	16,664					
kW Savings (kW) Therm Savings (kWh) (kWh) (Therms) (S) (S) (S) (Energy + O&M) (S) (S) (S) (Energy + O&M) (Yrs) (S) (Yrs) (Cost (S) (Yrs) (Yrs) (Cost (S) (Yrs) (Yrs) (Cost (S) (S) (Yrs) (Cost (S)											•		•	
Delitation Tarial Attack PM 70 F 400 400 0 444 05 545 0 40 074 05 545 005 004 040 000			3.				O&M Savings (\$)		(\$) (Energy +			O&M and Incentives	Notes	
Building Lotal After PV 78.5 133,183.0 -141 35,515 0 46,971 35,515 885,601 24.9 23.6		Building Total After PV	78.5	133,183.0	-141	35,515	0	46,971	35,515	885,601	24.9	23.6		

				J	oseph T. Donahu	e Elementary Sch	ool						
Item	Name	kW Savings (kW)	kWh Savings (kWh)	Therm Savings (Therms)	Water Savings (kGal)	Utility Savings (\$)	O&M Savings (\$)	Incentives (\$)	Total Savings (\$) (Energy + O&M)	Implementation Cost (\$)	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Note
1.01	Convert all interior lighting to LED lighting	41.5	98,334	0	0	12,515	0	20,698	12,515	157,630	12.6	10.9	
1.02	Install occupancy/daylight/dimming controls	0.0	298	0	0	35	0	250	35	2,000	57.3	50.1	
1.03	Convert all exterior lighting to LED lighting and install control	5.1	22,250	0	0	2,527	0	15,600	2,527	44,852	17.7	11.6	
2.02	DHW Boiler Upgrade	0.0	0	405	0	455	0	1,296	455	13,449	29.6	26.7	
2.14	Exhaust Fan Controls Upgrade	0.0	11,974	0	0	1,401	0	3,832	1,401	8,970	6.4	3.7	
3.02	Install Walk-In Refrigerator/Freezer Controls	0.6	11,706	0	0	1,184	0	3,746	1,184	9,141	7.7	4.6	
3.03	Install kitchen hood controls	0.8	2,369	0	0	287	0	758	287	190,325	663.6	661.0	
3.08	Add occupancy-based controls to the Vending Machines	0.4	3,224	0	0	340	0	414	340	828	2.4	1.2	
4.01	Install Low Flow Aerators	0.0	0	0	118	714	0	0	714	2,113	3.0	3.0	
	Total (recommended measures)	48.3	150,156	405	118	19,458	0	46,593	19,458	429,307	22.1	19.7	
												•	
		Peak kW (kW)	kWh Generated (kWh)	Therm Generated (Therms)	Utility Savings (\$)	O&M Savings (\$)	Incentives (\$)	Total Savings (\$) (Energy + O&M)	Implementation Cost (\$)	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes	
	PV Totals	181.9	541,210	0	15,833	0	0	15,833					
						I	ı	Total Savings		I .	Payback with		
		kW Savings (kW)	kWh Savings (kWh)	Therm Savings (Therms)	Utility Savings (\$)	O&M Savings (\$)	Incentives (\$)	(\$) (Energy +	Implementation Cost (\$)	Simple Payback (Yrs)	O&M and Incentives	Notes	
	Building Total After PV	48.3	150,155.6	405	35,291	0	46,593	35,291	429,307	12.2	10.8		
Item	Name	kW Savings (kW)	kWh Savings (kWh)	Therm Savings (Therms)	Lillian M. Dunfee Water Savings (kGal)	Utility Savings	O&M Savings (\$)	Incentives (\$)	Total Savings (\$) (Energy + O&M)	Implementation Cost (\$)	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes
1.01	Convert all interior lighting to LED lighting	4.4	13,998	0	0	1.680	0	1,564	1,680	11,074	6.6	5.7	
	Install occupancy/daylight/dimming controls	0.0	12,704	0	0	1,634	0	440	1,634	22,522	13.8	13.5	
	Convert all exterior lighting to LED lighting and install control	0.0	9,625	0	0	1,238	0	6.800	1,238	14,100	11.4	5.9	
	DHW Heater Electric to a Natural Gas Conversion	0.4	3,560	-52	0	323	0	1,139	323	12,899	39.9	36.4	
	Convert AHUs w/ Electric Heat to Hydronic Heat	0.0	45,748	-1.951	0	3,862	0	14,639	3.862	33,293	8.6	4.8	
	Exhaust Fan Controls Upgrade	0.0	14,877	0	0	1,914	0	4,761	1,914	12,351	6.5	4.0	1
	Controls Systems Upgrades	0.0	6,866	207	0	1,098	0	2,859	1,098	147.066	133.9	131.3	1
	Install Walk-In Refrigerator/Freezer Controls	0.6	11,596	0	0	1,180	0	3,711	1,180	8,172	6.9	3.8	†
	Install kitchen hood controls	0.0	1,016	487	0	636	0	1.885	636	20.808	32.7	29.7	†
	Add occupancy-based controls to the Vending Machines	0.2	1,612	0	0	171	0	207	171	414	2.4	1.2	+
	Install Low Flow Aerators	0.0	1,012	0	99		0	0	502	1,320	2.6	2.6	+
	Total (recommended measures)	5.6	121,602	-1,309	99		0	38.005	14.238	284.018	19.9	17.3	+
	(roominonada madanad)	J. 0.0	121,002	1,303	33	14,230	. <u>"</u>	55,005	14,200	204,010	10.0	17.0	-
		Peak kW (kW)	kWh Generated (kWh)	Therm Generated (Therms)	Utility Savings (\$)	O&M Savings (\$)	Incentives (\$)	(\$) (Energy +	Implementation Cost (\$)	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes	
	PV Totals	210.2	398,661		9,218	l 0	0	9,218				1	

Utility Savings (\$)

23,456

Therm Savings

(Therms)

-1,309

Building Total After PV

kW Savings (kW) kWh Savings

(kWh)

121,602.2

Incentives

38,005

O&M Savings (\$)

(\$)

(Energy +

23,456

Implementation

Cost (\$)

284,018

Payback with O&M and

Incentives

Notes

Simple Payback (Yrs)

Russell O. Brackman Middle School													
Item	Name	kW Savings (kW)	kWh Savings (kWh)	Therm Savings (Therms)	Water Savings (kGal)	Utility Savings (\$)	O&M Savings (\$)	Incentives (\$)	Total Savings (\$) (Energy + O&M)	Implementation Cost (\$)	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes
1.01	Convert all interior lighting to LED lighting	63.9	144,329	0	0	18,744	0	36,048	18,744	284,055	15.2	13.2	1
1.02	Install occupancy/daylight/dimming controls	0.0	11,402	0	0	1,334	. 0	12,050	1,334	16,325	12.2	3.2	
1.03	Convert all exterior lighting to LED lighting and install control	5.3	23,386	0	0	2,665	0	11,800	2,665	26,120	9.8	5.4	
2.01	Replace Boilers, optimization controls	0.0	0	2,016	0	2,157	0	6,452	2,157	315,634	146.3	143.3	
2.02	DHW Boiler Upgrade	0.0	0	297	0	318	500	950	818	24,666	30.2	29.0	
2.05	Install VFDs on Pumps	1.0	2,959	0	0	361	0	947	361	16,280	45.1	42.4	
3.01	Controls Systems Upgrades	0.0	58,712	911	0	7,844	0	21,702	7,844	312,772	39.9	37.1	
3.02	Install Walk-In Refrigerator/Freezer Controls	0.2	4,983	0	0	502	0	1,595	502	7,691	15.3	12.2	
3.08	Add occupancy-based controls to the Vending Machines	0.8	7,193	0	0	759	0	1,224	759	2,448	3.2	1.6	
4.01	Install Low Flow Aerators	0.0	0	0	146	1,006	0	0	1,006	951	0.9	0.9	
	Total (recommended measures)	71.3	252,964	3,224	146	35,689	500	92,767	36,189	1,006,940	27.8	25.3	
	PV Totals	Peak kW (kW) 406.9	kWh Generated (kWh) 1,063,339	Therm Generated (Therms)	Utility Savings (\$) 30,984	O&M Savings (\$)	Incentives (\$)	Total Savings (\$) (Energy + O&M) 30,984	Implementation Cost (\$)	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs)	Notes	
	Building Total After PV	kW Savings (kW)	kWh Savings (kWh) 252.964.4	Therm Savings (Therms)	Utility Savings (\$) 66,674	O&M Savings (\$)	(\$)	(\$) (Energy + O&M) 67,174	Implementation Cost (\$) 1,006,940	Simple Payback (Yrs)	Payback with O&M and Incentives (Yrs) 13.6	Notes	

6.6 Cash Flow Analysis

A cash flow analysis was conducted for the proposed ECMs, considering annual energy savings, O&M savings, energy rebates/incentives, and total project costs. Total project costs include design, construction and professional expenses. Per the ESIP requirements, cash flow savings must be positive in each year.

Please note that a 20-year term was selected. In order for this term to be approved by NJBPU, CHP must be included in the project. Section 4.6 of this report discusses the proposed CHP plant in the high school. The cost of the CHP is reflected in the table directly below as well as in the cash flow analysis on the following page. Please note that the cash flow is positive both over the life of the project and each year of the project.

\$5,676,827
\$173
\$5,677,000
2.600%
18 years
2.279%
2.650%
6
No
\$0.045
2.000%
15
No

Year Installation	Annual Energy Savings (\$)	Annual PV Savings (\$)	Annual O&M Savings (\$)	Energy Rebates (\$)	Total Annual Savings (\$)	Principal	Interest	Annual Project Cost (\$)	Guarantee/ M&V Costs* (\$)	Annual Cash Flow (\$)	Cumulative Cash Flow (\$)
0	\$0	\$0		\$0	\$0			\$5,676,827	\$0	\$0	
1	\$185,088	\$149,034	(\$1,062)	\$0	\$333,060	(\$110,000)	(\$219,973)	(\$329,973)	\$0	\$3,087	\$3,087
2	\$189,306	\$152,779	(\$1,062)	\$230,556	\$571,579	(\$429,000)	(\$139,165)	(\$568,165)	\$0	\$3,414	\$6,500
3	\$193,620	\$156,616	(\$1,562)	\$230,556	\$579,229	(\$448,000)	(\$127,764)	(\$575,764)	\$0	\$3,465	\$9,966
4	\$198,032	\$160,547	(\$1,562)	\$0	\$357,017	(\$235,000)	(\$118,885)	(\$353,885)	\$0	\$3,132	\$13,098
5	\$202,545	\$164,575	(\$1,562)	\$0	\$365,558	(\$250,000)	(\$112,580)	(\$362,580)	\$0	\$2,978	\$16,076
6	\$207,161	\$168,703	(\$1,562)	\$0	\$374,302	(\$265,000)	(\$105,885)	(\$370,885)	\$0	\$3,417	\$19,492
7	\$211,882	\$172,932	(\$1,562)	\$0	\$383,252	(\$281,000)	(\$98,787)	(\$379,787)	\$0	\$3,465	\$22,957
8	\$216,710	\$177,265	(\$1,562)	\$0	\$392,413	(\$298,000)	(\$91,260)	(\$389,260)	\$0	\$3,153	\$26,110
9	\$221,648	\$181,705	(\$1,562)	\$0	\$401,790	(\$315,000)	(\$83,291)	(\$398,291)	\$0	\$3,499	\$29,609
10	\$226,699	\$186,254	(\$1,562)	\$0	\$411,390	(\$333,000)	(\$74,867)	(\$407,867)	\$0	\$3,523	\$33,132
11	\$231,865	\$190,914	(\$1,562)	\$0	\$421,217	(\$352,000)	(\$65,962)	(\$417,962)	\$0	\$3,255	\$36,387
12	\$237,149	\$195,689	(\$1,562)	\$0	\$431,276	(\$371,000)		(\$427,563)	\$0	\$3,713	\$40,100
13	\$242,553	\$200,582	(\$1,562)	\$0	\$441,573	(\$392,000)	(\$46,644)	(\$438,644)	\$0	\$2,929	\$43,029
14	\$248,080	\$205,595	(\$1,562)	\$0	\$452,112	(\$413,000)	(\$36,179)	(\$449,179)	\$0	\$2,933	\$45,962
15	\$253,733	\$210,730	(\$1,562)	\$0	\$462,901	(\$434,000)	(\$25,168)	(\$459,168)	\$0	\$3,733	\$49,695
16	\$259,515	\$0	(\$1,562)	\$0	\$257,953	(\$238,000)	(\$16,432)	(\$254,432)	\$0	\$3,521	\$53,216
17	\$265,429	\$0	(\$1,562)	\$0	\$263,867	(\$250,000)	(\$10,088)	(\$260,088)	\$0	\$3,779	\$56,994
18	\$271,478	\$0	(\$1,562)	\$0	\$269,916	(\$263,000)	(\$3,419)	(\$266,419)	\$0	\$3,497	\$60,491
19		\$0	(\$1,562)	\$0	\$276,102	\$0	\$0	\$0	\$0	\$276,102	\$336,593
20	\$283,991	\$0	(\$1,562)	\$0	\$282,429	\$0	\$0	\$0	\$0	\$282,429	\$619,021
Total	\$4,624,148	\$2,673,920	(\$30,247)	\$461,112	\$7,728,933	(\$5,677,000)	(\$1,432,912)	(\$7,109,912)	\$0	\$619,021	\$619,021

7.0 Energy Star Portfolio Manager

The Environmental Protection Agency's (EPA's) Energy Star Portfolio Manager (ESPM) benchmarking tool was used to assess each building's energy performance. Portfolio Manager provides a site and source Energy Use Intensity (EUI), as well as an Energy Star performance rating for qualifying building types. The EUIs are provided in kBtu/ft²/year, and the performance rating represents how energy efficient a building is on a scale of 1 to 100, with 100 being the most efficient. For a building to receive an Energy Star label, the energy benchmark rating must be at least 75. As energy use decreases from implementation of the proposed measures, the Energy Star rating will increase.

The site EUI is the amount of heat and electricity consumed by a building as reflected in utility bills. Site energy may be delivered to a school in the form of primary energy, which is raw fuel burned to create heat or electricity, such as natural gas or oil; or as secondary energy, which is the product created from a raw fuel such as electricity or district steam. To provide an equitable comparison for different buildings with varying proportions of primary and secondary energy consumption, Portfolio Manager uses the convention of source EUIs. The source energy also accounts for losses incurred in production, storage, transmission, and delivery of energy to the site, which provide an equivalent measure for various types of buildings with differing energy sources. The results of the Portfolio Manager benchmarking tool are contained in the table below.

Please note that the numbers below are normalized for weather by EPA ESPM. They <u>include</u> the PPA electric usage generated by the on-site photovoltaic panels but at a multiplier of 1.0 when converting from site to source kBtu/ft²/yr.

Building	Site EUI kBtu/ft²/yr	Source EUI kBtu/ft²/yr	Energy Star Rating (1-100)
Barnegat High School	63.1	128.4	42
Russell O Brackman Middle School	44.2	92.5	46
Cecil S Collins Elementary School	55.9	83.4	61
Joseph T Donahue Elementary School	52.6	104.4	41
Lillian M Dunfee Elementary School	45.0	78.8	68
Robert L Horbelt Elementary School	47.5	101.6	42

Most of the BTSD schools, excluding Dunfee and Collins have a below average Energy Star Score. By implementing the measures discussed in this ESP, it is expected that the EUI can be reduced and the energy star rating improved. There is potential for Energy Star Certification through the DOE for some of the schools, but will be dependent on final selection of ECMs.

The Portfolio Manager account can be accessed by entering the username and password shown below at the login screen of the Portfolio Manager website (https://www.energystar.gov/istar/pmpam/).

A full EPA Energy Star Portfolio Manager Report is in Appendix E. The username and password for the building's EPA Portfolio Manager Account has been provided by CHA to BTSD.

8.0 Greenhouse Gas Emission Reductions

According to the Energy Information Administration (EIA), Greenhouse Gasses (GHG) are chemical compounds found in the Earth's atmosphere which absorb infrared radiation and trap it as heat in the atmosphere. Some GHGs occur in nature such as water vapor, carbon dioxide (CO₂), methane (CH₄), nitrous oxide (NO_x) and sulfuric oxide (SO_x); while others are manmade. The concentrations of naturally occurring GHG are regulated by the Earth in a process known as the *Carbon Cycle*. However, over the past 150 years humans have contributed to a positive imbalance between GHG emissions and absorption through the *Carbon Cycle*. This has resulted in the continuing growth of GHG in the atmosphere.

By reducing facility electrical and natural gas usage through the implementation of energy efficient building design and equipment, a facility can help reduce their impact on the environment and help reduce GHG emissions. A reduction in electrical usage in the form of kWh corresponds to a reduction in electricity generated at a given power plant or plants. Usually electricity is generated by a variety of different methods and distributed on the grid. A breakdown of the fuel mix sources can be seen in the following table. Each fuel mix source contributes a different amount of CO_2 , NO_x and SO_x to the environment. The GHG emissions reduction is collectively measures as metric tons of carbon dioxide equivalent (MTCDE).

Zip Code:	08005	National Avg
Non-Hydro Renewables	3.2%	4.2%
Hydro	2.0%	6.8%
Nuclear	38.9%	20.2%
Oil	0.5%	1.1%
Natural Gas	39.6%	23.2%
Coal	15.5%	44.5%
Total	100%	100%

The following energy reduction and effect on GHG emissions has been quantified:

Total Annual Electrical Savings: 1,270,548 kWh
Total Annual PV Electric Generation: 2,779,017 kWh
Total Annual Electric Grid Reduction: 4,049,602 kWh

Total Annual Natural Gas Reduction: 12,894 Therms

Total Annual GHG Emission Reductions: 1,781 MTCDE

9.0 Maintenance Requirements

Routine maintenance can help keep equipment operating optimally and can extend equipment life. The scope of the ECMs covered in this ESP do not recommend changes, upgrades, or replacements that will significantly impact existing maintenance requirements, with the exception to the proposed CHP. The proposed CHP will have additional maintenance requirements that will include, but are not limited to, periodic inspection and servicing, performance monitoring and fault diagnostics, equipment repairs, and routine state and local government inspections. This ESP does not recommend the elimination of any maintenance contracts or the reduction of staff to account for any potential decrease in maintenance requirements due to the installation of new equipment proposed by the scope of this ESP.

10.0 Design Phase

10.1 Overview

In order to properly comply with local building codes, compliance issues and New Jersey Public contract law, BTSD will be required to secure the services of a New Jersey Licensed Engineering firm and/or Architectural firm as part of the implementation process. Specifications will be designed and developed in order to achieve all savings outlined in this ESP. Once specifications are completed, BTSD will solicit contractors capable of meeting the requirements of the specification for each trade. Spiezle (BTSD's Architect) and the selected engineer will be providing construction and project management services in order to maintain a schedule. An overview of these activities and functions are detailed below.

10.2 Construction Documents (CD) Phase

As part of this task, Spiezle and the selected engineer will provide construction drawings for the design and installation of recommended ECMs. Design engineers and Spiezle architects will perform site visits for field investigation to survey existing installation and to determine modifications required to successfully implement the ECMs. Plans and specifications will be prepared as follows: one (1) set of 60% and 90% construction drawings and specifications for review and comment, and one (1) set of final construction drawings and specifications.

Please note that based on discussions with facility personnel, all areas of work are expected to be free of asbestos or any hazardous material, and there is expected to be enough power in each building for the additional power requirements related to the ECMs.

10.3 Bidding and Award Phase

As part of this task, Spiezle and the selected engineer will assist BTSD by providing bidding services, attending a pre-Bid walk-through and bid opening, responding to bidders' questions, providing input for Addenda as necessary (to be issued by Spiezle), and providing recommendations based on Technical Evaluation of the Bids. BTSD will prepare and assemble the bid documents including Front End documents, and will issue Addenda, clarifications and/or responses to RFIs to bidding contractors.

10.4 Construction Phase

As part of this task, Spiezle and the selected engineer will provide construction administration services, including reviewing contractor's shop drawings, reviewing and responding to contractor's Request for Information (RFI), reviewing and making recommendations for approval of contractor's payment applications and requests for change orders, conducting field visits of the project sites during construction, conducting punch list walkthrough and preparing punch list of remaining work to be repaired or completed, and reviewing Record Drawings (As-Built) and Operation & Maintenance Manuals.

The construction period is common for all the buildings and estimated to be 6 months from the date of award of the selected contractor. Permit applications will be prepared by Spiezle.

11.0 Potential Risks

Any investment carries some degree of risk, including energy projects, thus it would be irresponsible not to consider that dimension in this ESP. The following present some of the risks involved:

- BTSD has chosen to pursue the DIY approach to implement this ESP. As such, an ESCO
 is not being contracted for the implementation of the ESP, and a guarantee will not be
 secured. Unlike the ESCO model, which puts all the responsibility onto the ESCO, the DIY
 model requires a high degree of owner involvement for success.
- Multiple contracts will be required with multiple vendors and contractors. As such, each
 contractor's accountability for project performance needs to be checked. Some measures
 will be implemented using BTSD maintenance staff to manage implementation costs.
- Failure to implement the ECMs in a timely manner can cost BTSD in the form of lost savings, and can add cost to the project (e.g., construction interest, re-mobilization).
- BTSD generally has control over operating hours. Increases and decreases in operating
 hours can show up as increases or decreases in "savings". BTSD will need to be diligent
 about equipment scheduling and maintaining control of equipment so that it remains
 scheduled and properly set back or shut off by the control system.
- BTSD will also need to be careful to not over-schedule equipment for events outside of normal school hours. The <u>upgraded control system will need to allow for improved functionality and efficiency of HVAC scheduling</u>, through event schedules and other strategies. This will reduce unnecessary runtime and <u>needs to result in a reduced runtime</u> of the existing equipment (compared to today) in order for this project to be successful and for the savings to be met.
- Some of the existing air handling equipment in the various buildings has failed over time
 and during the audit was shut down and not bringing in the desired amount of ventilation.
 This reduced ventilation decreases energy usage of the school. If these units are brought
 back online during the course of the term of the project, energy usage will increase with
 the corresponding increase in ventilation. This will appear as a reduction in savings even
 though it is bringing the building back to where it should have been operating all along.
- Equipment loads can change over time. BTSD generally has control over hours of operation, conditioned floor area, intensity of use (e.g., changes in occupancy or level of automation). Changes in load can show up as increases or decreases in "savings".
- Several energy efficiency measures are affected by weather. All assessments of achieved savings should be normalized for weather.
- Many energy conservation measures require user participation to generate savings (e.g., control settings). BTSD will need to decide to what degree monitoring and training will be necessary to mitigate risk.
- Performance of day-to-day maintenance activities can impact performance.

Appendix A: LGEA Reports







Local Government Energy Audit Report

Cecil S. Collins Elementary School and Board Offices October 31, 2019

Prepared for:

Barnegat Township School District 550, 570 Barnegat Blvd North Barnegat, New Jersey 08005 Prepared by:

TRC

900 Route 9 North

Woodbridge, New Jersey 07095

Disclaimer

The goal of this audit report is to identify potential energy efficiency opportunities, help prioritize specific measures for implementation, and provide information about financial incentives that may be available. Most energy conservation measures have received preliminary analysis of feasibility that identifies expected ranges of savings and costs. This level of analysis is usually considered sufficient to establish a basis for further discussion and to help prioritize energy measures.

TRC Companies, Inc. reviewed the energy conservation measures and estimates of energy savings were reviewed for technical accuracy. Actual, achieved energy savings depend on behavioral factors and other uncontrollable variables and, therefore, estimates of final energy savings are not guaranteed. TRC and the New Jersey Board of Public Utilities (NJBPU) shall in no event be liable should the actual energy savings vary.

TRC bases estimated installation costs on our experience at similar facilities, pricing from local contractors and vendors, and/or cost estimates from RS Means. We encourage the owner of the facility to independently confirm these cost estimates and to obtain multiple estimates when considering measure installations. Actual installation costs can vary widely based on individual measures and conditions. TRC and NJBPU do not guarantee installed cost estimates and shall in no event be held liable should actual installed costs vary from estimates.

New Jersey's Clean Energy Program (NJCEP) incentive values provided in this report are estimates based on program information available at the time of the report. Incentive levels are not guaranteed. The NJBPU reserves the right to extend, modify, or terminate programs without prior notice. Please review all available program incentives and eligibility requirements prior to selecting and installing any energy conservation measures.

The customer and their respective contractor(s) are responsible to implement energy conservation measures in complete conformance with all applicable local, state and federal requirements.

Copyright ©2019 TRC Companies, Inc. All rights reserved.

Reproduction or distribution of the whole, or any part of the contents of this document without written permission of TRC is prohibited. Neither TRC nor any of its employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any data, information, method, product or process disclosed in this document, or represents that its use will not infringe upon any privately-owned rights, including but not limited to, patents, trademarks or copyrights.





Table of Contents

1	Execu	tive Summary	1
	1.1	Planning Your Project	
	Pick	Your Installation Approach	
		e Options from Around the State	
2	Existir	ng Conditions	
	2.1	Site Overview	.
	2.2	Building Occupancy	
	2.3	Building Envelope	8
	2.4	Lighting Systems	
	2.5	Air Handling Systems	10
	Unit	Ventilators – Cecil S. Collins Elementary School	10
		kaged Units	
		Conditioners	
	2.6 2.7	Heating Hot Water Systems Building Energy Management Systems (EMS)	
	2.7	Domestic Hot Water	
	2.9	Food Service and Refrigeration Equipment	
	2.10	Plug Load & Vending Machines	
	2.11	Water-Using Systems	17
	2.12	On-Site Generation	17
3	Energy	y Use and Costs	18
	3.1	Electricity	20
	3.2	Natural Gas	
	3.3	Benchmarking	22
	Trac	king Your Energy Performance	23
4	Energ	y Conservation Measures	24
	4.1	Lighting	27
	ECM	1 1: Retrofit Fixtures with LED Lamps	27
	4.2	Lighting Controls	27
	ECM	1 2: Install Occupancy Sensor Lighting Controls	28
	ECM	1 3: Install High/Low Lighting Controls	28
	4.3	Variable Frequency Drives (VFD)	29
	ECM	1 4: Install VFDs on Constant Volume (CV) Fans	29
	4.4	Electric Unitary HVAC	30
	ECM	15: Install High-Efficiency Air Conditioning Units	30
	4.5	Domestic Water Heating	30






	EC	M 6: Install High-Efficiency Gas-Fired Water Heater	30
	EC	M 7: Install Low-Flow DHW Devices	31
5	Ener	gy Efficient Best Practices	32
	En	ergy Tracking with ENERGY STAR® Portfolio Manager®	32
		hting Controls	
	Th	ermostat Schedules and Temperature Resets	32
	AC	System Evaporator/Condenser Coil Cleaning	32
		AC Filter Cleaning and Replacement	
		iler Maintenance	
		ater Heater Maintenance	
		g Load Controls	
		mputer Power Management Software ocurement Strategies	
_		5	
6	On-s	ite Generation	35
	6.1	Solar Photovoltaic	36
	6.2	Combined Heat and Power	37
7	Proje	ect Funding and Incentives	38
	7.1	SmartStart	39
	7.2	Direct Install	40
	7.3	Pay for Performance - Existing Buildings	
	7.4	Combined Heat and Power	42
	7.5	Energy Savings Improvement Program	43
	7.6	SREC Registration Program	44
8	Ener	gy Purchasing and Procurement Strategies	45
	8.1	Retail Electric Supply Options	45
	8.2	Retail Natural Gas Supply Options	
Αŗ	pendi	x A: Equipment Inventory & Recommendations	A-1
Αŗ	pendi	x B: ENERGY STAR® Statement of Energy Performance	B-1
Αŗ	pendi	x C: Glossary	





EXECUTIVE SUMMARY

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) report for Cecil S. Collins Elementary School and Board Offices. This report provides you with information about your facility's energy use, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help make changes in your facility. TRC conducted this study as part of a comprehensive effort to assist New Jersey school districts and local governments in controlling their energy costs and to help protect our environment by reducing statewide energy consumption.

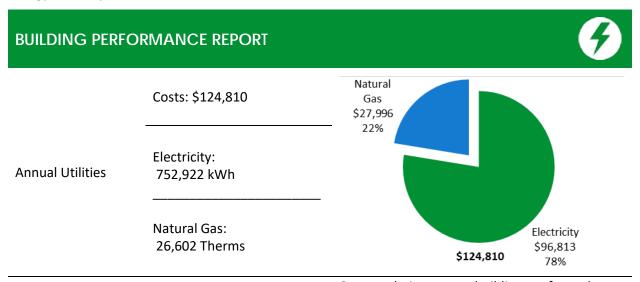

69

ENERGY STAR® Benchmarking Score (1-100 scale) Congratulations, your building performs better than the national average. This report has suggestions about how to keep your building running efficiently, further improve performance and lower your energy bills even more.

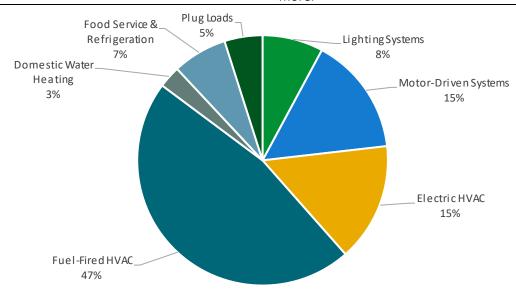


Figure 1 - Energy Use by System






POTENTIAL IMPROVEMENTS



This energy audit considered a range of potential energy improvements in your building. Costs and savings will vary between improvements. Presented below are two potential scopes of work for your consideration.


Scenario 1: Full Package (all evaluated measures)

Installation Cost		\$149,158
Potential Rebates & Incentiv	es ¹	\$11,728
Annual Cost Savings		\$16,226
Annual Energy Savings	•	y: 124,597 kWh as: 195 Therms
Greenhouse Gas Emission Savings		64 Tons
Simple Payback		8.5 Years
Site Energy Savings (all utilities)		



Scenario 2: Cost Effective Package²

Potential Rebates & Incentives \$8,9	16		
Annual Cost Savings \$14,8	13		
Electricity: 114,281 kV	Electricity: 114,281 kWh		
Annual Energy Savings Natural Gas: 112 Ther	ms		
Greenhouse Gas Emission Savings 58 To	ns		
Simple Payback 4.9 Yes	ars		
Site Energy Savings (all utilities)			



On-site Generation Potential

Photovoltaic	Medium
Combined Heat and Power	None

¹ Incentives are based on current SmartStart Prescriptive incentives. Other program incentives may apply.

² A cost-effective measure is defined as one where the simple payback does not exceed two-thirds of the expected proposed equipment useful life. Simple payback is based on the net measure cost after potential incentives.





#	Energy Conservation Measure	Cost Effective?	Annual Electric Savings (kWh)	Peak Demand Savings (kW)		Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades		8,526	2.7	-2	\$1,079	\$3,877	\$1,021	\$2,856	2.6	8,389
ECM 1	Retrofit Fixtures with LED Lamps	Yes	8,526	2.7	-2	\$1,079	\$3,877	\$1,021	\$2,856	2.6	8,389
Lighting	Control Measures		27,126	5.4	-6	\$3,428	\$24,071	\$2,515	\$21,556	6.3	26,651
ECM 2	Install Occupancy Sensor Lighting Controls	Yes	23,653	4.7	-5	\$2,989	\$20,021	\$2,515	\$17,506	5.9	23,240
ECM 3	Install High/Low Lighting Controls	Yes	3,472	0.7	-1	\$439	\$4,050	\$0	\$4,050	9.2	3,411
Variable	Frequency Drive (VFD) Measures		78,045	20.4	0	\$10,035	\$52,766	\$5,380	\$47,386	4.7	78,591
ECM 4	Install VFDs on Constant Volume (CV) Fans	Yes	78,045	20.4	0	\$10,035	\$52,766	\$5,380	\$47,386	4.7	78,591
Electric I	Jnitary HVAC Measures		10,315	5.8	0	\$1,326	\$63,880	\$2,662	\$61,218	46.2	10,388
ECM 5	Install High Efficiency Air Conditioning Units	No	10,315	5.8	0	\$1,326	\$63,880	\$2,662	\$61,218	46.2	10,388
Domestic Water Heating Upgrade			584	0.0	27	\$357	\$4,562	\$150	\$4,412	12.3	3,730
ECM 6	Install High Efficiency Gas-Fired Water Heater	No	0	0.0	8	\$87	\$4,340	\$150	\$4,190	48.3	964
ECM 7	Install Low-Flow DHW Devices	Yes	584	0.0	19	\$271	\$222	\$0	\$222	0.8	2,766
	TOTALS (COST EFFECTIVE MEASURES)		114,281	28.4	11	\$14,813	\$80,937	\$8,916	\$72,021	4.9	116,397
	TOTALS (ALL MEASURES)		124,597	34.2	19	\$16,226	\$149,158	\$11,728	\$137,429	8.5	127,749

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

Figure 2 – Evaluated Energy Improvements

For more detail on each evaluated energy improvement and a break out of cost-effective improvements, see **Section 4: Energy Conservation Measures**.

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





1.1 Planning Your Project

Careful planning makes for a successful energy project. When considering this scope of work, you will have some decisions to make, such as:

- How will the project be funded and/or financed?
- Is it best to pursue individual ECMs, groups of ECMs, or use a comprehensive approach where all ECMs are installed together?
- Are there other facility improvements that should happen at the same time?

Pick Your Installation Approach

New Jersey's Clean Energy Programs give you the flexibility to do a little or a lot. Rebates, incentives, and financing are available to help reduce both your installation costs and your energy bills. If you are planning to take advantage of these programs, make sure to review incentive program guidelines before proceeding. This is important because in most cases you will need to submit applications for the incentives before purchasing materials or starting installation.

The potential ECMs identified for this building likely qualify for multiple incentive and funding programs. Based on current program rules and requirements, your measures are likely to qualify for the following programs:

	Energy Conservation Measure	SmartStart	Direct Install	Pay For Performance
ECM 1	Retrofit Fixtures with LED Lamps	Х	X	
ECM 2	Install Occupancy Sensor Lighting Controls	X	X	
ECM 3	Install High/Low Lighting Controls		X	
ECM 4	Install VFDs on Constant Volume (CV) HVAC	Х	Х	
ECM 5	Install High Efficiency Electric AC	Х	Х	
ECM 6	Install High Efficiency Gas Water Heater	Х	X	
ECM 7	Install Low-Flow Domestic Hot Water Devices		X	

Figure 3 – Funding Options







New Jersey's Clean Energy Programs At-A-Glance

	SmartStart Flexibility to install at your own pace	Direct Install Turnkey installation	Pay for Performance Whole building upgrades
Who should use it?	Buildings installing individual measures or small group of measures.	Small to mid-size facilities that can bundle multiple measures together. Average peak demand should be below 200 kW. Not suitable for significant building shell issues.	Mid to large size facilities looking to implement as many measures as possible at one time. Peak demand should be over 200 kW.
How does it work?	Use in-house staff or your preferred contractor.	Pre-approved contractors pass savings along to you via reduced material and labor costs.	Whole-building approach to energy upgrades designed to reduce energy use by at least 15%. The more you save, the higher the incentives.
What are the Incentives?	Fixed incentives for specific energy efficiency measures.	Incentives pay up to 70% of eligible costs, up to \$125,000 per project. You pay the remaining 30% directly to the contractor.	Up to 25% of installation cost, calculated based on level of energy savings per square foot.
How do I participate?	Submit an application for the specific equipment to be installed.	Contact a participating contractor in your region.	Contact a pre-qualified Partner to develop your Energy Reduction Plan and set your energy savings targets.

Take the next step by visiting **www.njcleanenergy.com** for program details, applications, and to contact a qualified contractor.





Individual Measures with SmartStart

For facilities wishing to pursue only selected individual measures (or planning to phase implementation of selected measures over multiple years), incentives are available through the SmartStart program. To participate, you can use internal resources or an outside firm or contractor to perform the final design of the ECM(s) and install the equipment. Program pre-approval is required for some SmartStart incentives, so only after receiving pre-approval should you proceed with ECM installation.

Turnkey Installation with Direct Install

The Direct Install program provides turnkey installation of multiple measures through an authorized network of participating contractors. This program can provide substantially higher incentives than SmartStart, up to 70% of the cost of selected measures. Direct Install contractors will assess and verify individual measure eligibility and, in most cases, they perform the installation work. The Direct Install program is available to sites with an average peak demand of less than 200 kW.

Whole Building Approach with Pay for Performance

Pay for Performance can be a good option for medium to large sized facilities to achieve deep energy savings. Pay for Performance allows you to install as many measures as possible under a single project as well as address measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program (ESIP) loan also use this program. Pay for Performance works for larger customers with a peak demand over 200 kW. The minimum installed scope of work must include at least two unique measures resulting in at least 15% energy savings, where lighting cannot make up the majority of the savings.

More Options from Around the State

Financing and Planning Support with the Energy Savings Improvement Program (ESIP)

For larger facilities with limited capital availability to implement ECMs, project financing may be available through the ESIP. Supported directly by the NJBPU, ESIP provides government agencies with project development, design, and implementation support services, as well as, attractive financing for implementing ECMs. You have already taken the first step as an LGEA customer, because this report is required to participate in ESIP.

Resiliency with Return on Investment through Combined Heat & Power (CHP)

The CHP program provides incentives for combined heat and power (aka cogeneration) and waste heat to power projects. Combined heat and power systems generate power on-site and recover heat from the generation system to meet on-site thermal loads. Waste heat to power systems use waste heat to generate power. You will work with a qualified developer who will design a system that meets your building's heating and cooling needs.

Ongoing Electric Savings with Demand Response

The Demand Response Energy Aggregator program reduces electric loads at commercial facilities when wholesale electricity prices are high or when the reliability of the electric grid is threatened due to peak power demand. By enabling commercial facilities to reduce electric demand during times of peak demand, the grid is made more reliable and overall transmission costs are reduced for all ratepayers. Curtailment service providers provide regular payments to medium and large consumers of electric power for their participation in demand response (DR) programs. Program participation is voluntary, and facilities receive payments regardless of whether they are called upon to curtail their load during times of peak demand.





2 FXISTING CONDITIONS

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) Report for Cecil S. Collins Elementary School and Board Offices. This report provides information on how your facility uses energy, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help you implement the ECMs. This report also contains valuable information on financial incentives from New Jersey's Clean Energy Program (NJCEP) for implementing ECMs.

TRC conducted this study as part of a comprehensive effort to assist New Jersey educational and local government facilities in controlling energy costs and protecting our environment by offering a wide range of energy management options and advice.

For a detailed list of the locations and recommended energy conservation measures for all inventoried equipment, see **Appendix A: Equipment Inventory & Recommendations.**

2.1 Site Overview

On July 2, 2019, TRC performed an energy audit at Cecil S. Collins Elementary School and Board Offices, located in Barnegat, New Jersey. TRC met with Neil Piro to review the facility operations and help focus our investigation on specific energy-using systems.

Cecil S. Collins Elementary School and Board Offices is combined in this report as a multi-story, 91,429 square foot complex. The school was built in 1980, and the office space was built in 2003. Spaces in the school include classrooms, a gymnasium, offices, a cafeteria, corridors, stairwells, a commercial kitchen, and mechanical space.

The elementary school and the board of education offices share the same electric meter.

The elementary school is 100% heated and cooled. The site HVAC operations are controlled using EMS. The most recent renovation in the building was performed in 2016.

The BOE office building is a 100% electrically heated and cooled.

2.2 Building Occupancy

The elementary school is occupied from September through June during the hours mentioned in the table below. Typical weekday occupancy is 100 full time staff and 511 students. The office building is occupied year-round by 15 full-time staff.

Building Name	Weekday/Weekend	Operating Schedule
	Weekday	5:30 AM - 6:30 PM
Cecil S Collins		Saturday: Gym operation only
Elementary School	Weekend	7:00 AM - 3:00 PM
		Sunday: No Operation
Barnegat Township	Weekday	8:00 AM - 5:00 PM
Board Office	Weekend	No Operation

Figure 4 - Building Occupancy Schedule





2.3 Building Envelope

Cecil S. Collins Elementary School walls are concrete block over structural steel with a brick over blocks facade. The roof is flat with white rubber layering. The walls are made of painted concrete masonry units. The windows are double-glazed and have aluminum frames with a thermal break. The weather seals were observed to have leakage. The operable window weather seals are in good condition, showing little evidence of excessive wear. Exterior doors are aluminum good condition with undamaged door seals.



Exterior Doors



Window



Roof



Facade

The BOE office building walls are sheet metal over insulation of wood framing. The roof is flat and covered with black rubber membrane, and it is in good condition. The dividing walls within the building includes drywalls, metal studs, and wood. The windows are double-pane with vinyl frames and are in fair condition. The exterior doors are made of metal and in good condition.



Roof



Façade and Windows





2.4 Lighting Systems

Cecil S. Collins Elementary School: The primary interior lighting system uses 14-watt linear LED lamps and 32-Watt linear fluorescent T8 lamps (2- or 3- lamp) fixtures serving large spaces such as the gym, cafeteria, classrooms, and corridors. There are also several 10-watt LED lamp fixtures and 60-watt incandescent lamps fixtures serving smaller spaces, such as restrooms and storage spaces. The lighting fixtures in the building uses electronic ballasts. Most fixtures are in good condition. All exit signs are LED units.

Interior lighting levels were generally sufficient. All interior spaces in the rooms are controlled using wall switches.

Most exterior lighting fixtures are LED fixtures that are wall, canopy, or pole-mounted ranging from 40 to 300W. The fixtures are controlled using timeclock and photocells.



Linear T8 Tubes



Pole-mounted LED Fixtures



Wall-mounted LED Fixtures



LED Fixtures






BOE Office: The primary interior lighting system uses 32-Watt linear fluorescent T8 lamps with electronic ballasts. Fixture types include 2- or 3-lamp, 2- or 4-foot long troffers. Most fixtures are in good condition. All interior fixtures are controlled using wall switches.

All exit signs are LED units. Interior lighting levels were generally sufficient.

The exterior lights consist of 23-watt compact fluorescent lamp fixture and 42-watt LED wall-mounted fixtures. Exterior fixtures are controlled using photocells.







Interior Linear T8 Fixtures

2.5 Air Handling Systems

Unit Ventilators - Cecil S. Collins Elementary School

There are 33 pneumatically controlled heating unit ventilators with hot water coils equipped with supply fan motors, outside air dampers and fan coil valves. This system is original to the building and appears to be in fair operating condition.

Packaged Units

Cecil S. Collins Elementary School: Many of the building areas are served using packaged units with cooling capacities ranging from 5- to 22-tons. Most of these units have built-in gas-fired furnace sections that provide heat to the respective zones. The units are controlled by the EMS. These units have EER ratings ranging from 9.1 to 9.2.

The cooling setpoint in the facility is between $71^{\circ}F - 73^{\circ}F$. Many of the units are still within their useful life; the older units are evaluated for replacement.

BOE Office: Building areas are served by six packaged AC (ICP) units of 3-ton cooling capacity and an EER of 10. The units have forced air electric heaters with heating capacity of 10 kW that provide space heating to respective zones. The zone temperatures are controlled using programmable thermostats.

The units were installed in 2003 and are aged past their useful life. These have hence been evaluated for replacement.





Air Conditioners

Cecil S. Collins Elementary School: The music room is cooled using a window AC unit with a cooling capacity 0.67 tons and an EER of 8.3. An office area is cooled using a split AC unit of 1-ton cooling capacity and an EER of 10.4. Both of these units are aged beyond the useful life of the equipment and have been evaluated for replacement.



Window AC



Packaged Unit with Gas-fired Furnace



Split AC Unit



Unit Ventilators





Air Conditioners

BOE Office: The server closet in the building is cooled using a 2-ton Samsung split AC unit with an EER of 10.8. This unit was installed in 2005 and has been evaluated for replacement.



Packaged AC and Heater



Split AC Unit



Thermostat



Packaged AC and Heater





2.6 Heating Hot Water Systems

The elementary school has two (AERCO) gas-fired hot water condensing boilers serving the building heating load. The burners are fully modulating with a nominal efficiency of 93%. The boilers are configured in a lead-lag control scheme. Both boilers are required under high load conditions. Installed in 2012, they are in good condition.

The boilers are configured in a variable flow primary distribution with two 5hp VFD controlled hot water pumps operating in a lead-lag control scheme. The boilers provide hot water to unit ventilators and heating and ventilating units.

The occupied heating setpoint in the facility is 70°F, and the temperature is controlled using EMS.



Condensing Boiler



Heating Hot Water Pump



Air Compressor




VFD





2.7 Building Energy Management Systems (EMS)

The elementary school has a Johnson Controls EMS that controls the HVAC equipment, boilers, air handlers, and package units. The EMS provides equipment scheduling control and monitors and controls space temperatures, supply air temperatures, and humidity and heating water loop temperatures.




EMS



EMS



EMS



EMS

2.8 Domestic Hot Water

Cecil S. Collins Elementary School: Hot water is produced by a 75-gallon 75.1 MBh gas-fired storage water heater at 70% efficiency. The water heater was installed in 2009 and is in fair condition and maintained well.



Hot Water Heater





BOE Office: Hot water is produced by a 6-gallon 6.6 kW electric storage water heater. The water heater was installed in 2003 and is in good condition and maintained well.



Hot Water Heater





2.9 Food Service and Refrigeration Equipment

The elementary school kitchen has mix of gas and electric equipment that is used to prepare lunches for students. Most cooking is done using a conventional gas-fired electric oven and an electric stove. Bulk prepared foods are held in several electric holding cabinets. Equipment is high-efficiency and in good condition.

The kitchen has several stand-up refrigerators, freezers, and freezer chests. All equipment is highefficiency and in good condition.

The walk-in refrigerator has an estimated 0.6-ton compressor and a two-fan evaporator. The walk-in medium temperature freezer has a 1.0-ton compressor and a three-fan evaporator.

Our analysis determined that this building's food service equipment accounts for a relatively high proportion of overall energy use. While cost-effective opportunities to replace equipment are limited at this time, we recommend that you work with your food service equipment suppliers to maintain equipment in a way that minimizes energy use. This may include cleaning air intakes and exhausts or other methods of keeping your existing equipment operating in top shape. When food service equipment is eventually replaced consider installing high-efficiency or ENERGY STAR labeled equipment.

Visit https://www.energystar.gov/products/commercial food service equipment for the latest information on high-efficiency food service equipment.



Reach-in Refrigerator



Food Holding Cabinet



Electric Stove



Walk-in Unit





2.10 Plug Load & Vending Machines

The utility bill analysis for the elementary school and the BOE office indicates that plug loads consume approximately 5% percent of total building energy use. This is higher than a typical building.

You may wish to consider paying particular attention to minimizing your plug load usage. This report makes suggestions for ECMs in this area, as well as Energy Efficient Best Practices.

In the elementary school, there are approximately 127 computer work stations throughout the facility. Plug loads throughout the building include general café and office equipment. There are classroom typical loads such as Smart Boards, projectors, and fans.

There are several residential-style refrigerators throughout the building that are used to store food by staff. These vary in condition and efficiency.

The BOE office has approximately 20 computer work stations throughout the facility. Plug loads throughout the building include general café and office equipment.

2.11 Water-Using Systems

In the elementary school there are 28 faucets with flow rates are at 2.2 gallons per minute (gpm) or higher. Toilets are rated at 1.6 gallons per flush (gpf) and urinals are rated at 1.0 gpf.

In the BOE office there are three faucets with flow rates are at 2.2 gallons per minute (gpm) or higher. Toilets are rated at 1.6 gpf.

2.12 On-Site Generation

The Cecil S. Collins Elementary School has a photovoltaic (PV) array that was installed in 2011. This system provides approximately 82% of the electricity used at this facility.



Solar Array



Solar Array






3 ENERGY USE AND COSTS

Twelve months of utility billing data are used to develop annual energy consumption and cost data. This information creates a profile of the annual energy consumption and energy costs.

Utility Summary								
Fuel Usage Cost								
Electricity	752,922 kWh	\$96,813						
Natural Gas	26,602 Therms	\$27,996						
Total	\$124,810							



An energy balance identifies and quantifies energy use in your various building systems. This can highlight areas with the most potential for improvement. This energy balance was developed using calculated energy use for each of the end uses noted in the figure.

The energy auditor collects information regarding equipment operating hours, capacity, efficiency, and other operational parameters from facility staff, drawings, and on-site observations. This information is used as the inputs to calculate the existing conditions energy use for the site. The calculated energy use is then compared to the historical energy use and the initial inputs are revised, as necessary, to balance the calculated energy use to the historical energy use.





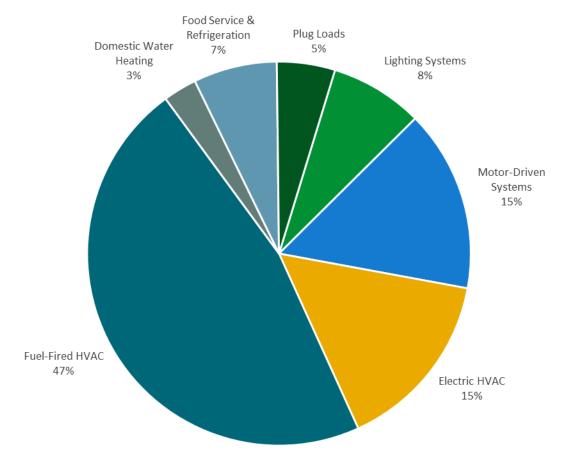



Figure 5 - Energy Balance





3.1 Electricity

JCP&L delivers electricity under rate class GSS.

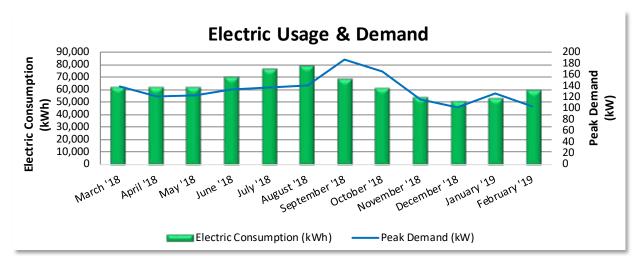

		Electric B	illing Data		
Period Ending	Days in Period	Electric Usage (kWh)	Demand (kW)	Demand Cost	Total Electric Cost
3/27/18	30	61,399	139	\$853	\$8,090
4/25/18	29	61,726	121	\$701	\$8,127
5/25/18	30	61,843	124	\$713	\$8,163
6/26/18	32	69,754	134	\$834	\$8,902
7/26/18	30	75,797	137	\$856	\$9,527
8/27/18	32	78,563	140	\$878	\$9,738
9/26/18	30	68,026	187	\$1,190	\$9,178
10/25/18	29	61,002	166	\$980	\$8,246
11/27/18	33	53,861	116	\$665	\$6,263
12/27/18	30	50,817	102	\$577	\$6,527
1/25/19	29	52,618	126	\$730	\$6,826
2/26/19	32	59,578	103	\$581	\$7,491
Totals	366	754,985	187	\$9,558	\$97,079
Annual	365	752,922	187	\$9,532	\$96,813

Notes:


- Peak demand of 187 kW occurred in September '18.
- The average electric cost over the past 12 months was \$0.129/kWh, which is the blended rate
 that includes energy supply, distribution, demand, and other charges. This report uses this
 blended rate to estimate energy cost savings.





3.2 Natural Gas

New Jersey Natural Gas delivers natural gas under rate class GSL.

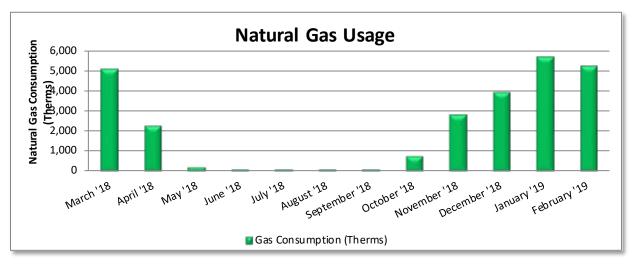

	Gas Billing Data											
Period Ending	Days in Period	Natural Gas Usage (Therms)	Natural Gas Cost									
4/5/18	30	5,061	\$4,737									
5/2/18	27	2,283	\$2,104									
6/1/18	30	214	\$477									
7/3/18	32	117	\$424									
8/2/18	30	97	\$408									
8/28/18	26	98	\$408									
10/1/18	34	136	\$477									
11/1/18	31	781	\$972									
12/1/18	30	2,820	\$2,537									
1/2/19	32	3,940	\$4,548									
2/1/19	30	5,674	\$5,770									
3/4/19	31	5,233	\$4,981									
Totals	363	26,456	\$27,843									
Annual	365	26,602	\$27,996									

Notes:

• The average gas cost for the past 12 months is \$1.052/therm, which is the blended rate used throughout the analysis.





3.3 Benchmarking

Your building was benchmarked using the United States Environmental Protection Agency's (EPA) *Portfolio Manager®* software. Benchmarking compares your building's energy use to that of similar buildings across the country, while neutralizing variations due to location, occupancy and operating hours. Some building types can be scored with a 1-100 ranking of a building's energy performance relative to the national building market. A score of 50 represents the national average and a score of 100 is best.

This ENERGY STAR® benchmarking score provides a comprehensive snapshot of your building's energy performance. It assesses the building's physical assets, operations, and occupant behavior, which is compiled into a quick and easy-to-understand score.

Benchmarking Score

69

Due to its unique characteristics, this building type is not able to receive a benchmarking score. This report contains suggestions about how to improve building performance and reduce energy costs.

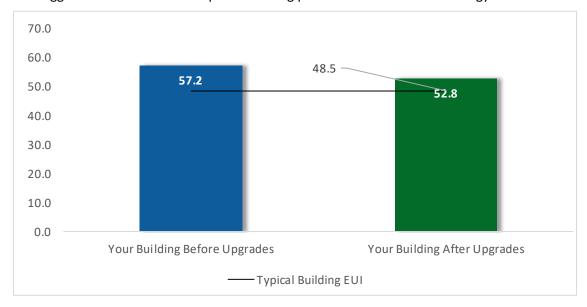


Figure 6 - Energy Use Intensity Comparison

Congratulations, your building performs better than the national average. This report has suggestions about how to keep your building running efficiently, further improve performance, and lower your energy bills even more.

Energy use intensity (EUI) measures energy consumption per square foot and is the standard metric for comparing buildings' energy performance. A lower EUI means better performance and less energy consumed. A number of factors can cause as building to vary from the "typical" energy usage. Local weather conditions, building age and insulation levels, equipment efficiency, daily occupancy hours, changes in occupancy throughout the year, equipment operating hours, and occupant behavior all contribute to a building's energy use and the benchmarking score.





Tracking Your Energy Performance

Keeping track of your energy use on a monthly basis is one of the best ways to keep energy costs in check. Update your utility information in Portfolio Manager® regularly, so that you can keep track of your building's performance.

We have created a Portfolio Manager® account for your facility and we have already entered the monthly utility data shown above for you. Account login information for your account will be sent via email.

Free online training is available to help you use ENERGY STAR® Portfolio Manager® to track your building's performance at: https://www.energystar.gov/buildings/training.

For more information on ENERGY STAR® and Portfolio Manager®, visit their website³.

LGEA Report - Barnegat Township School District Cecil S. Collins Elementary School and Board Offices

³ https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/earn-recognition/energy-star-certification/how-app-1.





4 ENERGY CONSERVATION MEASURES

The goal of this audit report is to identify and evaluate potential energy efficiency improvements, provide information about the cost effectiveness of those improvements, and recognize potential financial incentives from NJBPU. Most energy conservation measures have received preliminary analysis of feasibility which identifies expected ranges of savings and costs. This level of analysis is typically sufficient to demonstrate project cost-effectiveness and help prioritize energy measures.

Calculations of energy use and savings are based on the current version of the *New Jersey's Clean Energy Program Protocols to Measure Resource Savings*, which is approved by the NJBPU. Further analysis or investigation may be required to calculate more precise savings based on specific circumstances.

Operation and maintenance costs for the proposed new equipment will generally be lower than the current costs for the existing equipment—especially if the existing equipment is at or past its normal useful life. We have conservatively assumed there to be no impact on overall maintenance costs over the life of the equipment.

Financial incentives are based on the current NJCEP prescriptive SmartStart program. A higher level of investigation may be necessary to support any SmartStart Custom, Pay for Performance, or Direct Install incentive applications. Some measures and proposed upgrades may be eligible for higher incentives than those shown below through other NJCEP programs described in a following section of this report.





#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO₂e Emissions Reduction (lbs)
Lighting	Upgrades	8,526	2.7	-2	\$1,079	\$3,877	\$1,021	\$2,856	2.6	8,389
ECM 1	Retrofit Fixtures with LED Lamps	8,526	2.7	-2	\$1,079	\$3,877	\$1,021	\$2,856	2.6	8,389
Lighting	Control Measures	27,126	5.4	-6	\$3,428	\$24,071	\$2,515	\$21,556	6.3	26,651
ECM 2	Install Occupancy Sensor Lighting Controls	23,653	4.7	-5	\$2,989	\$20,021	\$2,515	\$17,506	5.9	23,240
ECM 3	Install High/Low Lighting Controls	3,472	0.7	-1	\$439	\$4,050	\$0	\$4,050	9.2	3,411
Variable	Frequency Drive (VFD) Measures	78,045	20.4	0	\$10,035	\$52,766	\$5,380	\$47,386	4.7	78,591
ECM 4	Install VFDs on Constant Volume (CV) Fans	78,045	20.4	0	\$10,035	\$52,766	\$5,380	\$47,386	4.7	78,591
Electric	Unitary HVAC Measures	10,315	5.8	0	\$1,326	\$63,880	\$2,662	\$61,218	46.2	10,388
ECM 5	Install High Efficiency Air Conditioning Units	10,315	5.8	0	\$1,326	\$63,880	\$2,662	\$61,218	46.2	10,388
Domest	ic Water Heating Upgrade	584	0.0	27	\$357	\$4,562	\$150	\$4,412	12.3	3,730
ECM 6	Install High Efficiency Gas-Fired Water Heater	0	0.0	8	\$87	\$4,340	\$150	\$4,190	48.3	964
ECM 7	Install Low-Flow DHW Devices	584	0.0	19	\$271	\$222	\$0	\$222	0.8	2,766
	TOTALS	124,597	34.2	19	\$16,226	\$149,158	\$11,728	\$137,429	8.5	127,749

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance

Figure 7 – All Evaluated ECMs

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)		Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades	8,526	2.7	-2	\$1,079	\$3,877	\$1,021	\$2,856	2.6	8,389
ECM 1	Retrofit Fixtures with LED Lamps	8,526	2.7	-2	\$1,079	\$3,877	\$1,021	\$2,856	2.6	8,389
Lighting	Control Measures	27,126	5.4	-6	\$3,428	\$24,071	\$2,515	\$21,556	6.3	26,651
ECM 2	Install Occupancy Sensor Lighting Controls	23,653	4.7	-5	\$2,989	\$20,021	\$2,515	\$17,506	5.9	23,240
ECM 3	Install High/Low Lighting Controls	3,472	0.7	-1	\$439	\$4,050	\$0	\$4,050	9.2	3,411
Variable	Frequency Drive (VFD) Measures	78,045	20.4	0	\$10,035	\$52,766	\$5,380	\$47,386	4.7	78,591
ECM 4	Install VFDs on Constant Volume (CV) Fans	78,045	20.4	0	\$10,035	\$52,766	\$5,380	\$47,386	4.7	78,591
Domest	ic Water Heating Upgrade	584	0.0	19	\$271	\$222	\$0	\$222	0.8	2,766
ECM 7	Install Low-Flow DHW Devices	584	0.0	19	\$271	\$222	\$0	\$222	0.8	2,766
	TOTALS	114,281	28.4	11	\$14,813	\$80,937	\$8,916	\$72,021	4.9	116,397

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance

Figure 8 – Cost Effective ECMs

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





4.1 Lighting

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)				CO ₂ e Emissions Reduction (lbs)
Lighting	g Upgrades	8,526	2.7	-2	\$1,079	\$3,877	\$1,021	\$2,856	2.6	8,389
ECM 1	Retrofit Fixtures with LED Lamps	8,526	2.7	-2	\$1,079	\$3,877	\$1,021	\$2,856	2.6	8,389

When considering lighting upgrades, we suggest using a comprehensive design approach that simultaneously upgrades lighting fixtures and controls to maximize energy savings and improve occupant lighting. Comprehensive design will also consider appropriate lighting levels for different space types to make sure that the right amount of light is delivered where needed. If conversion to LED light sources is proposed, we suggest converting all fixtures of a specific lighting type (e.g. linear fluorescent) to LED lamps to minimize the number of lamp types in use at the facility, which should help reduce future maintenance costs.

ECM 1: Retrofit Fixtures with LED Lamps

Replace fluorescent or CFL with LED lamps. Many LED tubes are direct replacements for existing fluorescent tubes and can be installed while leaving the fluorescent fixture ballast in place. LED lamps can be used in existing fixtures as direct replacements for most other lighting technologies.

This measure saves energy by installing LEDs, which use less power than other lighting technologies while providing equivalent lighting output for the space. Maintenance savings may also be available, as longer-lasting LEDs lamps will not need to be replaced as often as the existing lamps.

Affected building areas: all areas with fluorescent fixtures with T8 tubes or CFL.

4.2 Lighting Controls

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)		Estimated Incentive (\$)*			CO ₂ e Emissions Reduction (lbs)
Lighting	Control Measures	27,126	5.4	-6	\$3,428	\$24,071	\$2,515	\$21,556	6.3	26,651
I F (TM/2)	Install Occupancy Sensor Lighting Controls	23,653	4.7	-5	\$2,989	\$20,021	\$2,515	\$17,506	5.9	23,240
LECM 3	Install High/Low Lighting Controls	3,472	0.7	-1	\$439	\$4,050	\$0	\$4,050	9.2	3,411

Lighting controls reduce energy use by turning off or lowering lighting fixture power levels when not in use. A comprehensive approach to lighting design should upgrade the lighting fixtures and the controls together for maximum energy savings and improved lighting for occupants.





ECM 2: Install Occupancy Sensor Lighting Controls

Install occupancy sensors to control lighting fixtures in areas that are frequently unoccupied, even for short periods. For most spaces, we recommend that lighting controls use dual technology sensors, which reduce the possibility of lights turning off unexpectedly.

Occupancy sensors detect occupancy using ultrasonic and/or infrared sensors. When an occupant enters the space, the lighting fixtures switch to full lighting levels. Most occupancy sensor lighting controls allow users to manually turn fixtures on/off, as needed. Some controls can also provide dimming options.

Occupancy sensors can be mounted on the wall at existing switch locations, on the ceiling, or in remote locations. In general, wall switch replacement sensors are best suited to single occupant offices and other small rooms. Ceiling-mounted or remote-mounted sensors are used in large spaces, locations without local switching, and where wall switches are not in the line-of-sight of the main work area.

This measure provides energy savings by reducing the lighting operating hours.

Affected building areas: offices, conference rooms, classrooms, gymnasium, library, restrooms, and storage rooms.

ECM 3: Install High/Low Lighting Controls

Install occupancy sensors to provide dual level lighting control for lighting fixtures in spaces that are infrequently occupied but may require some level of continuous lighting for safety or security reasons.

Lighting fixtures with these controls operate at default low levels when the area is unoccupied to provide minimal lighting to meet security or safety requirements. Sensors detect occupancy using ultrasonic and/or infrared sensors. When an occupant enters the space, the lighting fixtures switch to full lighting levels. Fixtures automatically switch back to low levels after a predefined period of vacancy. In parking lots and parking garages with significant ambient lighting, this control can sometimes be combined with photocell controls to turn the lights off when there is sufficient daylight.

The control lowers the light level by dimming the fixture output. Therefore, the controlled fixtures need to have a dimmable ballast or driver. This will need to be taken into account when selecting retrofit lamps and bulbs for the areas proposed for high/low control.

This measure provides energy savings by reducing the light fixture power draw when reduced light output is appropriate.

Affected building areas: hallways.





4.3 Variable Frequency Drives (VFD)

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)		Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Variable	e Frequency Drive (VFD) Measures	78,045	20.4	0	\$10,035	\$52,766	\$5,380	\$47,386	4.7	78,591
ECM 4	Install VFDs on Constant Volume (CV) Fans	78,045	20.4	0	\$10,035	\$52,766	\$5,380	\$47,386	4.7	78,591

Variable frequency drives (VFDs) control motors for fans, pumps, and process equipment based on the actual output required of the driven equipment. Energy savings result from more efficient control of motor energy usage when equipment operates at partial load. The magnitude of energy savings depends on the estimated amount of time that the motor would operate at partial load. For equipment with proposed VFDs, we have included replacing the controlled motor with a new motor to conservatively account for the cost of an inverter duty rated motor.

Premium efficiency motors have been proposed to be installed only in conjunction with proposed VFD motor measures. Non-inverter duty rated motors will need to be replaced when the VFD measure is implemented.

ECM 4: Install VFDs on Constant Volume (CV) Fans

Install VFDs to control constant volume fan motor speeds. This converts a constant-volume, single-zone air-handling system into a variable-air-volume (VAV) system. A separate VFD is usually required to control the return fan motor or dedicated exhaust fan motor, if the air handler has one.

Zone thermostats signal the VFD to adjust fan speed to maintain the appropriate temperature in the zone while maintaining a constant supply air temperature.

For air handlers with direct expansion (DX) cooling systems, the minimum air flow across the cooling coil required to prevent the coil from freezing must be determined during the final project design. The control system programming should maintain the minimum air flow whenever the compressor is operating. Prior to implementation, verify minimum fan speed in cooling mode with the manufacturer. Note that savings will vary depending on the operating characteristics of each AHU.

Energy savings result from reducing the fan speed (and power) when conditions allow for reduced air flow.

Affected air handlers: gym HV C-1, cafe RTU-3, RTU-B1 & D1, RTU-C1, café RTU-4.





4.4 Electric Unitary HVAC

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)				CO ₂ e Emissions Reduction (lbs)
Electric	Unitary HVAC Measures	10,315	5.8	0	\$1,326	\$63,880	\$2,662	\$61,218	46.2	10,388
I FUNIS	Install High Efficiency Air Conditioning Units	10,315	5.8	0	\$1,326	\$63,880	\$2,662	\$61,218	46.2	10,388

Replacing the unitary HVAC units has a long payback period and may not be justifiable based simply on energy considerations. However, most of the units at this facility are nearing or have reached the end of their normal useful life. Typically, the marginal cost of purchasing a high-efficiency unit can be justified by the marginal savings from the improved efficiency. When the window AC, split AC unit, and packaged units in the elementary schools and office building are eventually replaced, consider purchasing equipment that exceeds the minimum efficiency required by building codes.

ECM 5: Install High-Efficiency Air Conditioning Units

Replace standard efficiency packaged air conditioning units with high-efficiency packaged air conditioning units. The magnitude of energy savings for this measure depends on the relative efficiency of the older unit versus the new high-efficiency unit, average cooling load, and estimated annual operating hours.

4.5 Domestic Water Heating

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*			CO ₂ e Emissions Reduction (lbs)
Domes	tic Water Heating Upgrade	584	0.0	27	\$357	\$4,562	\$150	\$4,412	12.3	3,730
ECM 6	Install High Efficiency Gas-Fired Water Heater	0	0.0	8	\$87	\$4,340	\$150	\$4,190	48.3	964
ECM 7	Install Low-Flow DHW Devices	584	0.0	19	\$271	\$222	\$0	\$222	0.8	2,766

ECM 6: Install High-Efficiency Gas-Fired Water Heater

Replace the existing natural gas tank water heater with a high-efficiency gas tank water heater. Energy savings result from the increased efficiency of the unit, which uses less gas to heat water, and fewer operating hours to maintain the tank water temperature.





ECM 7: Install Low-Flow DHW Devices

Install low-flow devices to reduce overall hot water demand. The following low-flow devices are recommended to reduce hot water usage:

Device	Flow Rate
Faucet aerators (lavatory)	0.5 gpm
Faucet aerator (kitchen)	1.5 gpm
Showerhead	2.0 gpm
Pre-rinse spray valve (kitchen)	1.28 gpm

Low-flow devices reduce the overall water flow from the fixture, while still providing adequate pressure for washing. Pre-rinse spray valves—often used in commercial and institutional kitchens—remove food waste from dishes prior to dishwashing.

Additional cost savings may result from reduced water usage.





5 ENERGY EFFICIENT BEST PRACTICES

A whole building maintenance plan will extend equipment life; improve occupant comfort, health, and safety; and reduce energy and maintenance costs. You may already be doing some of these things— see our list below for potential additions to your maintenance plan. Be sure to consult with qualified equipment specialists for details on proper maintenance and system operation.

Energy Tracking with ENERGY STAR® Portfolio Manager®



You've heard it before - you can't manage what you don't measure. ENERGY STAR® Portfolio Manager® is an online tool that you can use to measure and track energy and water consumption, as well as greenhouse gas emissions⁴. Your account has already been established. Now you can continue to keep tabs on your energy performance every month.

Lighting Controls

As part of a lighting maintenance schedule, test lighting controls to ensure proper functioning. For occupancy sensors, this requires triggering the sensor and verifying that the sensor's timer settings are correct. For daylight and photocell sensors, maintenance involves cleaning sensor lenses and confirming that setpoints and sensitivity are configured properly.

Thermostat Schedules and Temperature Resets



Use thermostat setback temperatures and schedules to reduce heating and cooling energy use during periods of low or no occupancy. Thermostats should be programmed for a setback of 5-10°F during low occupancy hours (reduce heating setpoints and increase cooling setpoints). Cooling load can be reduced by increasing the facility's occupied setpoint temperature. In general, during the cooling season, thermostats should be set as high as possible without sacrificing occupant comfort.

AC System Evaporator/Condenser Coil Cleaning

Dirty evaporator and condenser coils restrict air flow and restrict heat transfer. This increases the loads on the evaporator and condenser fan, and decreases overall cooling system performance. Keeping the coils clean allows the fans and cooling system to operate more efficiently.

HVAC Filter Cleaning and Replacement

Air filters should be checked regularly (often monthly) and cleaned or replaced when appropriate. Air filters reduce indoor air pollution, increase occupant comfort, and help keep equipment operating efficiently. If the building has a building management system, consider installing a differential pressure switch across filters to send an alarm about premature fouling or overdue filter replacement. Over time, filters become less and less effective as particulate buildup increases. Dirty filters also restrict air flow through the air conditioning or heat pump system, which increases the load on the distribution fans.

https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/use-portfolio-manager.





Boiler Maintenance


Many boiler problems develop slowly over time, so regular inspection and maintenance is essential to keeping the heating system running efficiently and preventing expensive repairs. Annual tune-ups should include a combustion analysis to analyze the exhaust from the boilers and to ensure the boiler is operating safely. Boilers should be cleaned according to the manufacturer's instructions to remove soot and scale from the water side or fire side of the boiler.

Water Heater Maintenance

Preventative maintenance can extend the life of the system, maintain energy efficiency, and ensure safe operation. At least once a year, follow manufacturer instructions to drain a few gallons out of the water heater using the drain valve. If there is a lot of sediment or debris, then a full flush is recommended. Turn the temperature down and then completely drain the tank. Annual checks should include checks for:

- Leaks or heavy corrosion on the pipes and valves.
- Corrosion or wear on the gas line and on the piping. If you noticed any black residue, soot, or charred metal, this is a sign you may be having combustion issues and you should have the unit serviced by a professional.
- For electric water heaters, look for signs of leaking such as rust streaks or residue around the upper and lower panels covering the electrical components on the tank.
- For water heaters more than three years old, have a technician inspect the sacrificial anode annually.

Plug Load Controls



Reducing plug loads is a common way to decrease your electrical use. Limiting the energy use of plug loads can include increasing occupant awareness, removing under-used equipment, installing hardware controls, and using software controls. Consider enabling the most aggressive power settings on existing devices or install load sensing or occupancy sensing (advanced) power strips⁵. Your local utility may offer incentives or rebates for this equipment.

Computer Power Management Software

Many computers consume power during nights, weekends, and holidays. Screen savers are commonly confused as a power management strategy. This contributes to avoidable, excessive electrical energy consumption. There are innovative power management software packages available that are designed to deliver significant energy saving and provide ongoing tracking measurements. A central power management platform helps enforce energy savings policies as well as identify and eliminate underutilized devices.

⁵ For additional information refer to "Assessing and Reducing Plug and Process Loads in Office Buildings" http://www.nrel.gov/docs/fy13osti/54175.pdf, or "Plug Load Best Practices Guide" http://www.advancedbuildings.net/plug-load-best-practices-guide-offices.





Procurement Strategies

Purchasing efficient products reduces energy costs without compromising quality. Consider modifying your procurement policies and language to require ENERGY STAR® or WaterSense $^{\text{TM}}$ products where available.





6 ON-SITE GENERATION

You don't have to look far in New Jersey to see one of the thousands of solar electric systems providing clean power to homes, businesses, schools, and government buildings. On-site generation includes both renewable (e.g., solar, wind) and non-renewable (e.g., fuel cells) technologies that generate power to meet all or a portion of the facility's electric energy needs. Also referred to as distributed generation, these systems contribute to greenhouse gas (GHG) emission reductions, demand reductions and reduced customer electricity purchases, which results in improved electric grid reliability through better use of transmission and distribution systems.

Preliminary screenings were performed to determine if an on-site generation measure could be a cost-effective solution for your facility. Before deciding to install an on-site generation system, we recommend conducting a feasibility study to analyze existing energy profiles, siting, interconnection, and the costs associated with the generation project including interconnection costs, departing load charges, and any additional special facilities charges.





6.1 Solar Photovoltaic

Photovoltaic (PV) panels convert sunlight into electricity. Individual panels are combined into an array that produces direct current (DC) electricity. The DC current is converted to alternating current (AC) through an inverter. The inverter is then connected to the building's electrical distribution system.

A preliminary screening based on the facility's electric demand, size and location of free area, and shading elements shows that the facility has **medium** potential for installing an additional PV array.

The amount of free area, ease of installation (roof), and the lack of shading elements contribute to the medium potential in the elementary school. A PV array located in the parking lot be feasible. If you are interested in pursuing the installation of PV, we recommend conducting a full feasibility study.

The graphic below displays the results of the PV potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

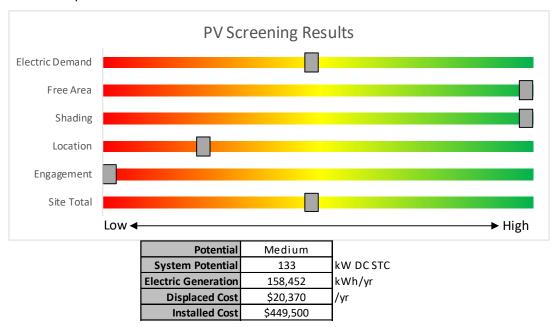


Figure 9 - Photovoltaic Screening

Solar Renewable Energy Certificate (SREC) Registration Program (SRP)

Rebates are not available for solar projects, but owners of solar projects MUST register their projects in the SREC Registration Program before starting construction. Once your PV system is up and running, you periodically earn credits, which can then be sold on the open market for up to 15 years.

If you are considering installing solar photovoltaics on your building, visit www.njcleanenergy.com/srec for more information about the SREC Registration Program.

Get more information about solar power in New Jersey or find a qualified solar installer who can help you decide if solar is right for your building:

- Basic Info on Solar PV in New Jersey: www.njcleanenergy.com/whysolar
- **New Jersey Solar Market FAQs**: <u>www.njcleanenergy.com/renewable-energy/program-updates-and-background-information/solar-transition/solar-market-faqs</u>
- Approved Solar Installers in the New Jersey Market: www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/?id=60&start=1





6.2 Combined Heat and Power

Combined heat and power (CHP) generate electricity at the facility and puts waste heat energy to good use. Common types of CHP systems are reciprocating engines, microturbines, fuel cells, backpressure steam turbines, and (at large facilities) gas turbines.

CHP systems typically produce a portion of the electric power used on-site, with the balance of electric power needs supplied by the local utility company. The heat is used to supplement (or replace) existing boilers and provide space heating and/or domestic hot water heating. Waste heat can also be routed through absorption chillers for space cooling.

The key criteria used for screening is the amount of time that the CHP system would operate at full load and the facility's ability to use the recovered heat. Facilities with a continuous need for large quantities of waste heat are the best candidates for CHP.

A preliminary screening based on heating and electrical demand, siting, and interconnection shows that the facility has **no** potential for installing a cost-effective CHP system.

Based on a preliminary analysis, the facility does not appear to meet the minimum requirements for a cost-effective CHP installation. Low or infrequent thermal load, and lack of space for siting the equipment are the most significant factors contributing to the lack of CHP potential.

The graphic below displays the results of the CHP potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

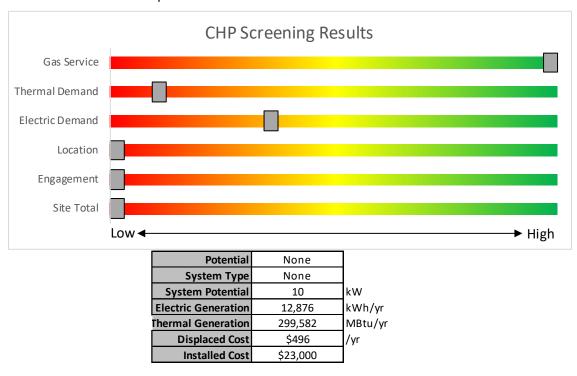


Figure 10 - Combined Heat and Power Screening

Find a qualified firm that specializes in commercial CHP cost assessment and installation: http://www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved vendorsearch/.





7 Project Funding and Incentives

Ready to improve your building's performance? Pick the program that works best for you. Incentive programs that may apply to this facility are identified in the Executive Summary. This section provides an overview of currently available New Jersey's Clean Energy Programs.

	SmartStart Flexibility to install at your own pace	Direct Install Turnkey installation	Pay for Performance Whole building upgrades		
Who should use it?	Buildings installing individual measures or small group of measures.	Small to mid-size facilities that can bundle multiple measures together.	Mid to large size facilities looking to implement as many measures as possible at one time.		
		Average peak demand should be below 200 kW.	Peak demand should be over 200 kW.		
		Not suitable for significant building shell issues.			
How does it work?	Use in-house staff or your preferred contractor.	Pre-approved contractors pass savings along to you via reduced material and labor costs.	Whole-building approach to energy upgrades designed to reduce energy use by at least 15%. The more you save, the higher the incentives.		
What are the Incentives?	Fixed incentives for specific energy efficiency measures.	Incentives pay up to 70% of eligible costs, up to \$125,000 per project.	Up to 25% of installation cost, calculated based on level of energy savings per		
		You pay the remaining 30% directly to the contractor.	square foot.		
How do I participate?	Submit an application for the specific equipment to be installed.	Contact a participating contractor in your region.	Contact a pre-qualified Partner to develop your Energy Reduction Plan and set your energy savings targets.		

Take the next step by visiting **www.njcleanenergy.com** for program details, applications, and to contact a qualified contractor.





7.1 SmartStart



SmartStart offers incentives for installing prescriptive and custom energy efficiency measures at your facility. This program provides an effective mechanism for securing incentives for energy efficiency measures installed individually or as part of a package of energy upgrades. This program serves most common equipment types and sizes.

SmartStart routinely adds, removes, or modifies incentives from year-to-year for various energy efficient equipment based on market trends and new technologies.

Equipment with Prescriptive Incentives Currently Available:

Electric Chillers
Electric Unitary HVAC
Gas Cooling
Gas Heating
Gas Water Heating
Ground Source Heat Pumps
Lighting

Lighting Controls
Refrigeration Doors
Refrigeration Controls
Refrigerator/Freezer Motors
Food Service Equipment
Variable Frequency Drives

Incentives

The SmartStart Prescriptive program provides fixed incentives for specific energy efficiency measures. Prescriptive incentives vary by equipment type.

SmartStart Custom provides incentives for more unique or specialized technologies or systems that are not addressed through prescriptive incentives. Custom incentives are calculated at \$0.16/kWh and \$1.60/therm based on estimated annual savings. Incentives are capped at 50% of the total installed incremental project cost, or a project cost buy down to a one-year payback (whichever is less). Program incentives are capped at \$500,000 per electric account and \$500,000 per natural gas account, per fiscal year.

How to Participate

Submit an application for the specific equipment to be installed. Many applications are designed as rebates, although others require application approval prior to installation. You can work with your preferred contractor or use internal staff to install measures.

Visit <u>www.njcleanenergy.com/SSB</u> for a detailed program description, instructions for applying, and applications.





7.2 Direct Install



Direct Install is a turnkey program available to existing small to medium-sized facilities with an average peak electric demand that does not exceed 200 kW over the recent 12-month period. You work directly with a preapproved contractor who will perform a free energy assessment at your facility, identify specific eligible measures, and provide a clear scope of work for

installation of selected measures. Energy efficiency measures may include lighting and lighting controls, refrigeration, HVAC, motors, variable speed drives, and controls.

Incentives

The program pays up to 70% of the total installed cost of eligible measures, up to \$125,000 per project. Each entity is limited to incentives up to \$250,000 per fiscal year.

How to Participate

To participate in Direct Install, you will need to contact the participating contractor assigned to the region of the state where your facility is located. A complete list of Direct Install program partners is provided on the Direct Install website linked below. The contractor will be paid the measure incentives directly by the program, which will pass on to you in the form of reduced material and implementation costs. This means up to 70% of eligible costs are covered by the program, subject to program caps and eligibility, while the remaining 30% of the cost is paid to the contractor by the customer.

Detailed program descriptions and applications can be found at: www.njcleanenergy.com/DI.





7.3 Pay for Performance - Existing Buildings



Pay for Performance works for larger customers with a peak demand over 200 kW. The minimum installed scope of work must include at least two unique measures that results in at least 15% source energy savings, and lighting cannot make up the majority of the savings. P4P is a generally a good option for medium-to-large sized facilities looking to implement as many

measures as possible under a single project to achieve deep energy savings. This program has an added benefit of addressing measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program loan also use this program.

Incentives

Incentives are based on estimated and achieved energy savings ranging from \$0.18-\$0.22/kWh and \$1.80-\$2.50/therm, capped at the lesser of 50% total project cost, or \$1 million per electric account and \$1 million per natural gas account, per fiscal year, not to exceed \$2 million per project. An incentive of \$0.15/square foot is also available to offset the cost of developing the Energy Reduction Plan (see below) contingent on the project moving forward with measure installation.

How to Participate

Contact one of the pre-approved consultants and contractors ("Partners"). Under direct contract to you, they will help further evaluate the measures identified in this report through development of the energy reduction plan, assist you in implementing selected measures, and verify actual savings one year after the installation. Your Partner will also help you apply for incentives.

Approval of the final scope of work is required by the program prior to installation. Installation can be done by the contractor of your choice (some P4P Partners are also contractors) or by internal staff, but the Partner remains involved throughout construction to ensure compliance with the program requirements.

Detailed program descriptions, instructions for applying, applications and list of Partners can be found at: www.njcleanenergy.com/P4P.





7.4 Combined Heat and Power

The Combined Heat & Power (CHP) program provides incentives for eligible CHP or waste heat to power (WHP) projects. Eligible CHP or WHP projects must achieve an annual system efficiency of at least 65% (lower heating value, or LHV), based on total energy input and total utilized energy output. Mechanical energy may be included in the efficiency evaluation.

Incentives

Size (Installed Rated Capacity) ¹	Incentive (\$/kW)	% of Total Cost Cap per Project ³	\$ Cap per Project ³
≤500 kW	\$2,000	30-40% ²	\$2 million
>500 kW - 1 MW	\$1,000		
> 1 MW - 3 MW	\$550		
>3 MW	\$350	30%	\$3 million
. West	27.522		223-100-
<1 MW	\$1,000 \$500	30%	\$2 million \$3 million
	(Installed Rated Capacity)¹ ≤500 kW >500 kW - 1 MW > 1 MW - 3 MW	(Installed Rated Capacity)¹ ≤500 kW \$2,000 >500 kW \$1,000 > 1 MW - 3 MW \$550 >3 MW \$350	(Installed Rated Capacity)¹ Incentive (\$/kW) Cost Cap per Project³ ≤500 kW \$2,000 30-40%² >500 kW - 1 MW \$1,000 > 1 MW - 3 MW \$550 >3 MW \$350

[&]quot;Waste Heat to Power: Powered by non-renewable fuel source, heat recovery or other mechanical recovery from existing equipment utilizing new electric generation equipment (e.g. steam turbine).

Check the NJCEP website for details on program availability, current incentive levels, and requirements.

How to Participate

You work with a qualified developer or consulting firm to complete the CHP application. Once the application is approved the project can be installed. Information about the CHP program can be found at: www.njcleanenergy.com/CHP.





7.5 Energy Savings Improvement Program

The Energy Savings Improvement Program (ESIP) serves New Jersey's government agencies by financing energy projects. An ESIP is a type of performance contract, whereby school districts, counties, municipalities, housing authorities and other public and state entities enter in to contracts to help finance building energy upgrades. Annual payments are lower than the savings projected from the ECMs, ensuring that ESIP projects are cash flow positive for the life of the contract.

ESIP provides government agencies in New Jersey with a flexible tool to improve and reduce energy usage with minimal expenditure of new financial resources. NJCEP incentive programs described above can also be used to help further reduce the total project cost of eligible measures.

How to Participate

This LGEA report is the first step to participating in ESIP. Next, you will need to select an approach for implementing the desired ECMs:

- (1) Use an energy services company or "ESCO."
- (2) Use independent engineers and other specialists, or your own qualified staff, to provide and manage the requirements of the program through bonds or lease obligations.
- (3) Use a hybrid approach of the two options described above where the ESCO is used for some services and independent engineers, or other specialists or qualified staff, are used to deliver other requirements of the program.

After adopting a resolution with a chosen implementation approach, the development of the energy savings plan (ESP) can begin. The ESP demonstrates that the total project costs of the ECMs are offset by the energy savings over the financing term, not to exceed 15 years. The verified savings will then be used to pay for the financing.

The ESIP approach may not be appropriate for all energy conservation and energy efficiency improvements. Carefully consider all alternatives to develop an approach that best meets your needs. A detailed program descriptions and application can be found at: www.njcleanenergy.com/ESIP.

ESIP is a program delivered directly by the NJBPU and is not an NJCEP incentive program. As mentioned above, you can use NJCEP incentive programs to help further reduce costs when developing the energy savings plan. Refer to the ESIP guidelines at the link above for further information and guidance on next steps.





7.6 SREC Registration Program

The SREC (Solar Renewable Energy Certificate) Registration Program (SRP) is used to register the intent to install solar projects in New Jersey. Rebates are not available for solar projects, but owners of solar projects *must* register their projects prior to the start of construction to establish the project's eligibility to earn SRECs. Registration of the intent to participate in New Jersey's solar marketplace provides market participants with information about the pipeline of anticipated new solar capacity and insight into future SREC pricing.

After the registration is accepted, construction is complete, and final paperwork has been submitted and is deemed complete, the project is issued a New Jersey certification number, which enables it to generate New Jersey SRECs. SREC's are generated once the solar project has been authorized to be energized by the Electric Distribution Company (EDC).

Each time a solar installation generates 1,000 kilowatt-hours (kWh) of electricity, an SREC is earned. Solar project owners report the energy production to the SREC Tracking System. This reporting allows SREC's to be placed in the customer's electronic account. SRECs can then be sold on the SREC Tracking System, providing revenue for the first 15 years of the project's life.

Electricity suppliers, the primary purchasers of SRECs, are required to pay a Solar Alternative Compliance Payment (SACP) if they do not meet the requirements of New Jersey's Solar Renewable Portfolio Standard. Purchasing SRECs can help them meet those requirements. As SRECs are traded in a competitive market, the price may vary significantly. The actual price of an SREC during a trading period fluctuates depending on supply and demand.

Information about the SRP can be found at: www.njcleanenergy.com/srec.





8 ENERGY PURCHASING AND PROCUREMENT STRATEGIES

8.1 Retail Electric Supply Options

Energy deregulation in New Jersey has increased energy buyers' options by separating the function of electricity distribution from that of electricity supply. So, though you may choose a different company from which to buy your electric power, responsibility for your facility's interconnection to the grid and repair to local power distribution will still reside with the traditional utility company serving your region.

If your facility is not purchasing electricity from a third-party supplier, consider shopping for a reduced rate from third-party electric suppliers. If your facility already buys electricity from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party electric suppliers is available at the NJBPU website⁶.

8.2 Retail Natural Gas Supply Options

The natural gas market in New Jersey is also deregulated. Most customers that remain with the utility for natural gas service pay rates that are market-based and that fluctuate monthly. The utility provides basic gas supply service (BGSS) to customers who choose not to buy from a third-party supplier for natural gas commodity.

A customer's decision about whether to buy natural gas from a retail supplier typically depends on whether a customer prefers budget certainty and/or longer-term rate stability. Customers can secure longer-term fixed prices by signing up for service through a third-party retail natural gas supplier. Many larger natural gas customers may seek the assistance of a professional consultant to assist in their procurement process.

If your facility does not already purchase natural gas from a third-party supplier, consider shopping for a reduced rate from third-party natural gas suppliers. If your facility already purchases natural gas from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party natural gas suppliers is available at the NJBPU website⁷.

⁶ www.state.nj.us/bpu/commercial/shopping.html

⁷ www.state.nj.us/bpu/commercial/shopping.html





APPENDIX A: EQUIPMENT INVENTORY & RECOMMENDATIONS

Lighting Inventory & Recommendations

LIGHTING HIV		ry & Recommenda g Conditions	10113				Proposed Conditions									Energy Impact & Financial Analysis							
Location	Fixture Quantit y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years		
Electrical room	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Generator room	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Boilerroom	11	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,480		None	No	11	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Maintenance break room	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Maintenance restroom	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Maintenance restroom	1	LED Lamps: Screw-in 1 lamp	Wall Switch	s	10	3,480		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Custodian area	5	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	5	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.0	172	0	\$22	\$116	\$20	4.4		
Custodian area	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0		
Multi purpose room	20	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	20	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	688	0	\$87	\$540	\$70	5.4		
Multi purpose room	20	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	20	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	688	0	\$87	\$540	\$70	5.4		
Multi purpose room	4	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	4	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0		
Kitchen	36	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,480		None	No	36	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Kitchen office	4	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,480	2	None	Yes	4	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,401	0.0	206	0	\$26	\$116	\$20	3.7		
Kitchen restroom	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	s	44	3,480		None	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Kitchen toilet	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,480		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Kitchen entrance	12	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480		None	No	12	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Kitchen entrance	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0		
Kitchen storage	1	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	S	58	3,480		None	No	1	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	58	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Kitchen storage room	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,480	1, 2	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	482	0	\$61	\$226	\$30	3.2		
Kitchen	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Kitchen	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Switch	S	62	3,480	1	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Switch	29	3,480	0.0	126	0	\$16	\$37	\$10	1.7		
236 Music	4	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.0	138	0	\$17	\$116	\$20	5.5		
Electrical room	2	LED - Linear Tubes: (2) 4' Lamps	Switch	S	29	3,480		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Custodian closet	1	LED - Linear Tubes: (2) 4' Lamps	Switch	S	29	3,480		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Girls bathroom	3	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	S	58	3,480	2	None	Yes	3	LED - Linear Tubes: (4) 4' Lamps	Occupanc y Sensor	58	2,401	0.0	206	0	\$26	\$270	\$0	10.3		





	Existin	g Conditions					Proposed Conditions								Energy Impact & Financial Analysis							
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years	
Men's restroom	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,480		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,480	0.0	0	0	\$0	\$0	\$0	0.0	
Women's restroom	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,480		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,480	0.0	0	0	\$0	\$0	\$0	0.0	
225 SC51	3	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,480	2	None	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.0	103	0	\$13	\$116	\$20	7.4	
225 SC51	2	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	S	58	3,480	2	None	Yes	2	LED - Linear Tubes: (4) 4' Lamps	Occupanc y Sensor	58	2,401	0.0	138	0	\$17	\$116	\$20	5.5	
Boys restroom	3	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	S	58	3,480	2	None	Yes	3	LED - Linear Tubes: (4) 4' Lamps	Occupanc y Sensor	58	2,401	0.0	206	0	\$26	\$270	\$0	10.3	
CR 233	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
CR 226	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
CR 227	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
CR 232	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
CR 231	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
CR 228	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
CR 230	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
229 office	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
Vestibule 12	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0	
Vestibule 12	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
200 hallway	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	3	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,401	0.1	310	0	\$39	\$225	\$0	5.7	
200 hallway	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
Gym side hallway	11	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	3	None	Yes	11	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,401	0.1	379	0	\$48	\$450	\$0	9.4	
Gym side hallway	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
CR 244	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
132 office	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0	
CR 235	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
CR 235	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
CR 236	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
CR 236	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	





	Existin	g Conditions					Proposed Conditions								Energy Impact & Financial Analysis							
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years	
Electrical room	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,480		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0	
CR 237	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
CR 237	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
237 storage	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,480		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,480	0.0	0	0	\$0	\$0	\$0	0.0	
237 toilet	1	Incandescent: Screw-in 1 lamp	Wall Switch	S	60	3,480	1	Relamp	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	9	3,480	0.0	195	0	\$25	\$17	\$1	0.7	
CR 238	13	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,480	2	None	Yes	13	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	447	0	\$57	\$270	\$35	4.2	
CR 238	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
238 storage	1	Incandes cent: Screw-in 2 lamp	Wall Switch	S	120	3,480	1	Relamp	No	1	LED Lamps: Screw-in 2 lamps	Wall Switch	18	3,480	0.1	390	0	\$49	\$34	\$2	0.7	
CR 239	12	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	413	0	\$52	\$270	\$35	4.5	
230 hallway	7	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	3	None	Yes	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,401	0.0	241	0	\$30	\$225	\$0	7.4	
CR 240	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
CR 240	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
243 teachers lounge	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
CR 241	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
CR 241	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
CR 242	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
240 hallway	6	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	3	None	Yes	6	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,401	0.0	206	0	\$26	\$225	\$0	8.6	
240 hallway	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
246A room	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,480	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.0	69	0	\$9	\$116	\$20	11.0	
246D room	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.0	69	0	\$9	\$116	\$20	11.0	
246B room	3	Linear Fluorescent - T8: 4' T8 (32W) - 6L	Wall Switch	S	176	3,480	1, 2	Relamp	Yes	3	LED - Linear Tubes: (6) 4' Lamps	Occupanc y Sensor	87	2,401	0.3	1,332	0	\$168	\$445	\$110	2.0	
246A room	1	Linear Fluorescent - T8: 4' T8 (32W) - 6L	Wall Switch	S	176	3,480	1	Relamp	No	1	LED - Linear Tubes: (6) 4' Lamps	Wall Switch	87	3,480	0.1	341	0	\$43	\$110	\$30	1.8	
246 Library	40	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	40	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.3	1,377	0	\$174	\$1,080	\$140	5.4	
246 Library	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
246 storage	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.0	69	0	\$9	\$116	\$20	11.0	





	Existin	g Conditions					Proposed Conditions									Energy Impact & Financial Analysis							
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years		
Control office	2	Linear Fluorescent - T8: 4' T8 (32W) - 6L	Wall Switch	S	176	3,480	1, 2	Relamp	Yes	2	LED - Linear Tubes: (6) 4' Lamps	Occupanc y Sensor	87	2,401	0.2	888	0	\$112	\$335	\$80	2.3		
CR 223	16	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,480	2	None	Yes	16	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	551	0	\$70	\$270	\$35	3.4		
223 toilet	1	Linear Fluorescent - T8: 4' T8 (32W) - 6L	Wall Switch	S	176	3,480	1	Relamp	No	1	LED - Linear Tubes: (6) 4' Lamps	Wall Switch	87	3,480	0.1	341	0	\$43	\$110	\$30	1.8		
Nurse's office	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.0	69	0	\$9	\$116	\$20	11.0		
Nurse's check room	4	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,480	2	None	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.0	138	0	\$17	\$116	\$20	5.5		
Nurse's restroom	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,480		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Custodian closet	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Main office storage	4	LED - Linear Tubes: (1) 4' Lamp	Wall Switch	s	15	3,480	2	None	Yes	4	LED - Linear Tubes: (1) 4' Lamp	Occupanc y Sensor	15	2,401	0.0	69	0	\$9	\$116	\$0	13.3		
Main office	13	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,480	2	None	Yes	13	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,401	0.1	671	0	\$85	\$270	\$35	2.8		
Main office kitchen	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,480		None	No	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Principal office	4	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	S	58	3,480	2	None	Yes	4	LED - Linear Tubes: (4) 4' Lamps	Occupanc y Sensor	58	2,401	0.1	275	0	\$35	\$270	\$35	6.8		
Principal office restroom	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,480		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Conference room	4	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,480	2	None	Yes	4	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,401	0.0	206	0	\$26	\$116	\$20	3.7		
VP office	3	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,480	2	None	Yes	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,401	0.0	155	0	\$20	\$116	\$20	4.9		
VP office	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
Office by the main hall	12	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	s	44	3,480	2	None	Yes	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,401	0.1	619	0	\$78	\$270	\$35	3.0		
Office by the main hall	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0		
Main lobby	10	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,480	3	None	Yes	10	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,401	0.1	344	0	\$43	\$450	\$0	10.3		
Main lobby	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0		
Display case	2	LED Lamps: Screw-in 1 lamp - BR30	Wall Switch	S	12	3,480		None	No	2	LED Lamps: Screw-in 1 lamp - BR30	Wall Switch	12	3,480	0.0	0	0	\$0	\$0	\$0	0.0		
222 conference	12	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	413	0	\$52	\$270	\$35	4.5		
Room 221	8	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	8	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	275	0	\$35	\$270	\$35	6.8		
220 PT/OT	8	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	8	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	275	0	\$35	\$270	\$35	6.8		
220 hallway	18	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	3	None	Yes	18	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,401	0.1	619	0	\$78	\$675	\$0	8.6		
220 hallway	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0		





	Existin	g Conditions					Proposed Conditions								Energy Impact & Financial Analysis							
Location	Fixture Quantit y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years	
CR 209	6	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	s	44	3,480	2	None	Yes	6	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
CR 219	15	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	15	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	516	0	\$65	\$270	\$35	3.6	
CR 210	12	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,480	2	None	Yes	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,401	0.1	619	0	\$78	\$270	\$35	3.0	
CR 210	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
210 restroom	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,480		None	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	3,480	0.0	0	0	\$0	\$0	\$0	0.0	
CR 211	12	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,480	2	None	Yes	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,401	0.1	619	0	\$78	\$270	\$35	3.0	
CR 211	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
CR 211 restroom	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,480		None	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	3,480	0.0	0	0	\$0	\$0	\$0	0.0	
Electrical room	1	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	S	58	3,480		None	No	1	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	58	3,480	0.0	0	0	\$0	\$0	\$0	0.0	
210 hallway	13	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	3	None	Yes	13	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,401	0.1	447	0	\$57	\$450	\$0	8.0	
210 hallway	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
Book storage	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.0	69	0	\$9	\$116	\$0	13.3	
CR 212	13	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	13	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	447	0	\$57	\$270	\$35	4.2	
CR 212	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
212 storage	1	Incandescent: Screw-in 2 lamp	Wall Switch	S	120	3,480	1	Relamp	No	1	LED Lamps: Screw-in 2 lamps	Wall Switch	18	3,480	0.1	390	0	\$49	\$34	\$2	0.7	
CR 213	13	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	13	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	447	0	\$57	\$270	\$35	4.2	
CR 213	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
213 storage	1	Incandescent: Screw-in 2 lamp	Wall Switch	S	120	3,480	1	Relamp	No	1	LED Lamps: Screw-in 2 lamps	Wall Switch	18	3,480	0.1	390	0	\$49	\$34	\$2	0.7	
210 hallway	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	3	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,401	0.1	310	0	\$39	\$450	\$0	11.5	
CR 214	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
CR 214	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
CR 215	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
CR 215	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0	
CR 218	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	
CR 216	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0	





	Existin	g Conditions					Prop	osed Conditio	ns						Energy Ir	npact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
CR 216	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
CR 217	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0
210 hallway	7	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	3	None	Yes	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,401	0.0	241	0	\$30	\$225	\$0	7.4
Gym	18	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	s	44	3,480	2	None	Yes	18	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,401	0.2	929	0	\$117	\$270	\$35	2.0
Gym	4	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	4	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Gym office	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.0	69	0	\$9	\$116	\$20	11.0
Gym restroom	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,480		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,480	0.0	0	0	\$0	\$0	\$0	0.0
Gym storage	4	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,480	2	None	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.0	138	0	\$17	\$116	\$0	6.7
Mezzanine	7	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480		None	No	7	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0
Front parking lot	2	LED - Fixtures: Outdoor Pole/Arm- Mounted Area/Roadway Fixture	Timecloc k		100	4,368		None	No	2	LED - Fixtures: Outdoor Pole/Arm Mounted Area/Roadway Fixture	Timecloc k	100	4,368	0.0	0	0	\$0	\$0	\$0	0.0
Wallpacks	14	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell		50	4,380		None	No	14	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell	50	4,380	0.0	0	0	\$0	\$0	\$0	0.0
Canopy mount	1	LED - Fixtures: Front door mount	Photocell		40	4,380		None	No	1	LED - Fixtures: Front door mount	Photocell	40	4,380	0.0	0	0	\$0	\$0	\$0	0.0
Area light	1	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell		40	4,380		None	No	1	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell	40	4,380	0.0	0	0	\$0	\$0	\$0	0.0
Girls restroom	3	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,480	2	None	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.0	103	0	\$13	\$270	\$0	20.7
Mechanical storage	3	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,480	2	None	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.0	103	0	\$13	\$116	\$0	8.9
Custodian	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0
Men's staff room	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,480		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,480	0.0	0	0	\$0	\$0	\$0	0.0
Men's staff room	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,480		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,480	0.0	0	0	\$0	\$0	\$0	0.0
Boys' restroom	3	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.0	103	0	\$13	\$270	\$0	20.7
CR 201	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0
CR 208	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0
CR 202	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0
CR 207	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0
CR 203	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0
CR 206	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0





	Existin	g Conditions					Prop	osed Conditio	ns						Energy li	mpact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
CR 204	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0
CR 205	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,401	0.1	310	0	\$39	\$270	\$35	6.0
Vestibule 29	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,480	0.0	0	0	\$0	\$0	\$0	0.0
Vestibule 29	1	Exit Signs : LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
200 hallway	8	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,480	3	None	Yes	8	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,401	0.1	275	0	\$35	\$225	\$0	6.5
200 hallway	2	Exit Signs : LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
School driveway	3	LED - Fixtures : Outdoor Pole/Arm- Mounted Area/Roadway Fixture	Timecloc k		150	4,368		None	No	3	LED - Fixtures: Outdoor Pole/Arm Mounted Area/Roadway Fixture	Timecloc k	150	4,368	0.0	0	0	\$0	\$0	\$0	0.0
School driveway	7	LED - Fixtures: Outdoor Pole/Arm- Mounted Area/Roadway Fixture	Timecloc k		300	4,368		None	No	7	LED - Fixtures: Outdoor Pole/Arm Mounted Area/Roadway Fixture	Timecloc k	300	4,368	0.0	0	0	\$0	\$0	\$0	0.0
Board office - 1 conference room	6	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	s	93	1,440	1, 2	Relamp	Yes	6	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	994	0.3	599	0	\$76	\$599	\$125	6.3
Board office - Office 1	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	1,440	1, 2	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	994	0.1	200	0	\$25	\$226	\$50	7.0
Board office - Secretary office	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	1,440	1, 2	Relamp	Yes	5	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	994	0.2	333	0	\$42	\$453	\$85	8.7
Board office - Secretary office	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Board office - Superintendent office	5	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	1,440	1, 2	Relamp	Yes	5	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	994	0.2	499	0	\$63	\$544	\$110	6.9
Board office - Superintendent storage	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	1,440	1	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	1,440	0.0	78	0	\$10	\$55	\$15	4.0
Board office - Director office	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	1,440	1, 2	Relamp	Yes	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	994	0.1	299	0	\$38	\$280	\$65	5.7
Board office - Storage in hall	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	1,440	1	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	1,440	0.0	52	0	\$7	\$37	\$10	4.0
Board office - Storage 2	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	1,440	1	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	1,440	0.0	52	0	\$7	\$37	\$10	4.0
Board office - Payroll office	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	1,440	1, 2	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	994	0.1	266	0	\$34	\$262	\$60	6.0
Board office - Women restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	520	1	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	520	0.0	19	0	\$2	\$37	\$10	11.1
Board office - Restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	520	1	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	520	0.0	19	0	\$2	\$37	\$10	11.1
Board office - Copy area	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	780	1, 2	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	538	0.1	108	0	\$14	\$226	\$50	12.9
Board office - Kitchen	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	780	1, 2	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	538	0.1	72	0	\$9	\$189	\$40	16.4
Board office - Kitchen	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Board office - Office 2	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	1,440	1, 2	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	994	0.1	200	0	\$25	\$226	\$50	7.0
Board office - Hallway	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	1,440	1, 3	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	994	0.1	266	0	\$34	\$371	\$40	9.8





	Existin	g Conditions					Prop	osed Conditio	ns						Energy In	npact & F	inancial <i>A</i>	nalysis			
	Fixture Quantit y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Board office - Hallway	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Board office - Office 3	4	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	1,440	1, 2	Relamp	Yes	4	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	994	0.2	399	0	\$50	\$335	\$80	5.1
Board office - Office 4	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	1,440	1, 2	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	994	0.1	200	0	\$25	\$226	\$50	7.0
Board office - Office 5	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	1,440	1, 2	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	994	0.1	200	0	\$25	\$226	\$50	7.0
Board office - Open office area	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	1,440	1, 2	Relamp	Yes	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	994	0.1	299	0	\$38	\$280	\$65	5.7
Board office - Open office hallway	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	1,440	1, 2	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	994	0.1	200	0	\$25	\$226	\$50	7.0
Board office - Open office 2	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	1,440	1, 2	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	994	0.1	200	0	\$25	\$335	\$65	10.7
Board office - Open office 2	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Board office - Main lobby	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	1,440	1, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	994	0.1	200	0	\$25	\$335	\$30	12.1
Board office - Exterior	4	Compact Fluorescent: Wall pack - Screw-in - 1 lamp	Photocell		92	4,380	1	Relamp	No	4	LED Lamps: Screw-in - 1 lamp	Photocell	64	4,380	0.1	484	0	\$62	\$69	\$4	1.0
Board office - Wall pack	6	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell		42	4,380		None	No	6	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell	42	4,380	0.0	0	0	\$0	\$0	\$0	0.0





Motor Inventory & Recommendations

	, <u>a necon</u>		g Conditions						Prop	osed Co	ndition	S		Energy Im	pact & Fir	nancial An	alysis			
Location	Area(s)/System(s) Served	Motor Quantit Y	Motor Application		Full Load Efficienc Y	VFD Control?	Remaining Useful Life	Annual Operating Hours	ECM #	Install High Efficienc y Motors?	Full Load Efficiency		Numbe r of VFDs	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Boiler room	P 1&2	2	Heating Hot Water Pump	5.0	89.5%	Yes	W	2,745		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Boiler room	DHW Circulator	1	Water Supply Pump	0.1	60.0%	No	W	8,760		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Classrooms	Unit ventilators	33	Supply Fan	0.2	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Closet	Gym HV-C-1	1	Supply Fan	3.0	87.5%	No	W	4,200	4	No	89.5%	Yes	1	0.9	4,190	0	\$539	\$3,884	\$240	6.8
Closet	AH-C-2 Media center	1	Supply Fan	3.0	87.5%	No	W	4,760	4	No	89.5%	Yes	1	0.9	4,749	0	\$611	\$3,884	\$240	6.0
Roof	RTU-3 Café	1	Supply Fan	15.0	91.0%	No	W	3,300	4	No	92.4%	Yes	1	4.4	15,632	0	\$2,010	\$7,086	\$1,200	2.9
Roof	RTU-3 Café	1	Exhaust Fan	10.0	89.5%	No	W	3,300	4	No	91.7%	Yes	1	3.1	10,760	0	\$1,384	\$5,375	\$800	3.3
Roof	RTU-B1, D1	2	Supply Fan	3.0	87.5%	No	W	3,600	4	No	89.5%	Yes	2	1.8	7,184	0	\$924	\$7,625	\$480	7.7
Roof	RTU-B1, D1	4	Supply Fan	0.8	60.0%	No	W	3,600		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-B1, D1	2	Exhaust Fan	0.8	60.0%	No	W	3,600	4	No	81.1%	Yes	2	0.7	3,697	0	\$475	\$5,759	\$120	11.9
Roof	RTU-4 Café	1	Supply Fan	15.0	91.0%	No	W	3,300	4	No	92.4%	Yes	1	4.4	15,632	0	\$2,010	\$7,086	\$1,200	2.9
Roof	RTU-4 Café	1	Exhaust Fan	10.0	89.5%	No	W	3,300	4	No	91.7%	Yes	1	3.1	10,760	0	\$1,384	\$5,375	\$800	3.3
Roof	EF-2	1	Exhaust Fan	0.3	60.0%	No	w	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-C1	1	Supply Fan	3.0	87.5%	No	W	3,600	4	No	89.5%	Yes	1	0.9	3,592	0	\$462	\$3,812	\$240	7.7
Roof	RTU-C1	2	Supply Fan	0.8	60.0%	No	W	3,600		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-C1	1	Exhaust Fan	0.8	60.0%	No	W	3,600	4	No	81.1%	Yes	1	0.3	1,848	0	\$238	\$2,880	\$60	11.9
Roof	EF-4	1	Exhaust Fan	0.3	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	EF-6	1	Exhaust Fan	0.2	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	EF-3	1	Exhaust Fan	0.3	60.0%	No	w	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	All school	10	Exhaust Fan	0.3	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0





		Existin	g Conditions						Prop	osed Co	ndition	S		Energy In	npact & Fir	nancial An	alysis			
Location	Area(s)/System(s) Served	Motor Quantit Y	Motor Application		Full Load Efficienc Y		Remaining Useful Life	Annual Operating Hours	#	Install High Efficienc y Motors?	Full Load Efficiency		Numbe r of VFDs	Total Peak kW Savings	kWh	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Board office - Roof	Offices	6	Supply Fan	0.3	60.0%	No	В	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
ERU-1	ERU-1	1	Supply Fan	3.0	87.5%	Yes	В	2,745		No	87.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
ERU-1	ERU-1	1	Exhaust Fan	2.0	86.5%	Yes	В	2,745		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
ERU-2	ERU-2	1	Supply Fan	3.0	87.5%	Yes	В	2,745		No	87.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
ERU-2	ERU-2	1	Exhaust Fan	2.0	86.5%	Yes	В	2,745		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
ERU-3	ERU-3	1	Supply Fan	3.0	87.5%	Yes	В	2,745		No	87.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
ERU-3	ERU-3	1	Exhaust Fan	2.0	86.5%	Yes	В	2,745		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
ERU-4	ERU-4	1	Supply Fan	3.0	87.5%	Yes	В	2,745		No	87.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
ERU-4	ERU-4	1	Exhaust Fan	2.0	86.5%	Yes	В	2,745		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0





Electric HVAC Inventory & Recommendations

LICCUIC IIV	te inventory	<u> </u>	ecommenua	tions																	
		Existin	g Conditions				Prop	osed Co	ndition	ns					Energy In	npact & Fir	nancial An	alysis			
Location	Area(s)/System(s) Served	System Quantit y	System Type	Cooling Capacit y per Unit (Tons)	Heating Capacity per Unit (MBh)	Remaining Useful Life	ECM #	Install High Efficienc y System?	System Quantit y	System Type	Cooling Capacit y per Unit (Tons)	Heating Capacity per Unit (MBh)	Cooling Mode Efficiency (SEER/EER)	Heating Mode Efficiency (COP)	Total Peak kW Savings	L/M/b	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
236 Music	236 Music	1	Window AC	0.67		В	5	Yes	1	Window AC	0.67		12.00		0.1	295	0	\$38	\$729	\$0	19.2
Office	Office	1	Split-System AC	1.00		В	5	Yes	1	Split-System AC	1.00		14.00		0.1	297	0	\$38	\$1,496	\$92	36.8
Roof	RTU - C-1 Café	1	Packaged AC	22.00		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Roof	Unknown	1	Packaged AC	10.00		В	5	Yes	1	Packaged AC	10.00		11.50		2.2	4,380	0	\$563	\$17,821	\$730	30.3
Roof	RTU-3 Café	1	Packaged AC	20.00		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU - B1,D1	2	Packaged AC	10.00		N		No							0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-4 Café	1	Packaged AC	20.00		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU C-4	1	Packaged AC	5.00		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU C-3	1	Packaged AC	5.00		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU C-1	1	Packaged AC	7.67		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU C-1	1	Packaged AC	7.50		N		No							0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU C-5 Room 221, 223	1	Packaged AC	7.67		W		No							0.0	0	0	\$0	\$0	\$0	0.0
Board office - Roof	Offices - RTU 6,4,2,3	4	Packaged AC	3.00		В	5	Yes	4	Packaged AC	3.00		14.00		2.1	3,291	0	\$423	\$27,228	\$1,104	61.7
Board office - Roof	Offices - RTU 6,4,2,3	4	Electric Forced Air Furnace		34.12	В		No							0.0	0	0	\$0	\$0	\$0	0.0
Board office - Roof	Offices - RTU 5,1	2	Packaged AC	3.00		В	5	Yes	2	Packaged AC	3.00		14.00		1.0	1,646	0	\$212	\$13,614	\$552	61.7
Board office - Roof	Offices - RTU 5,1	2	Electric Forced Air Furnace		34.12	В		No							0.0	0	0	\$0	\$0	\$0	0.0
Board office - Electrical closet	Servers	1	Split-System AC	2.00		В	5	Yes	1	Split-System AC	2.00		14.00		0.3	406	0	\$52	\$2,992	\$184	53.8





Fuel Heating Inventory & Recommendations

		Existin	g Conditions			Prop	osed Co	ndition	15				Energy In	npact & Fir	nancial An	alysis			
Location	Area(SI/SVSTem(S)	System Quantit Y		Output Capacit y per Unit (MBh)	Remaining Useful Life	#	Install High Efficienc y System?	У		Output Capacit y per Unit (MBh)	Heating Efficienc Y	Heating Efficienc y Units	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Boiler room	Boilers	2	Condensing Hot Water Boiler	698.00	W		No						0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-3 Café	1	Furnace	328.10	W		No						0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU - B1,D1	2	Furnace	192.00			No						0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-4 Café	1	Furnace	328.10	W		No						0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU C-1	1	Furnace	144.00			No						0.0	0	0	\$0	\$0	\$0	0.0

DHW Inventory & Recommendations

		Existin	g Conditions		Prop	osed Co	nditio	ns				Energy In	pact & Fir	nancial An	alysis			
Location	Area(s)/System(s)	System Quantit y	System Tyne	Remaining Useful Life		Replace?	System Quantit y		Fuel Type			Total Peak kW Savings	k\A/h		Total Annual Energy Cost Savings			Simple Payback w/ Incentives in Years
Boiler room	Restrooms and kitchen	1	Storage Tank Water Heater (> 50 Gal)	W	6	Yes	1	Storage Tank Water Heater (> 50 Gal)	Natural Gas	85.00%	Et	0.0	0	8	\$87	\$4,340	\$150	48.3
Board office - Kitchen	Board office	1	Storage Tank Water Heater (≤ 50 Gal)	В		No						0.0	0	0	\$0	\$0	\$0	0.0

Low-Flow Device Recommendations

	Reco	mmed	ation Inputs			Energy Im	pact & Fir	nancial An	alysis			
Location	ECM #	Device Quantit y		Existing Flow Rate (gpm)	Proposed Flow Rate (gpm)	Total Peak kW Savings	kWh	Total Annual MMBtu Savings	Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Restrooms	7	28	Faucet Aerator (Lavatory)	2.20	0.50	0.0	0	19	\$196	\$201	\$0	1.0
Board office - Restrooms	7	3	Faucet Aerator (Lavatory)	2.20	0.50	0.0	584	0	\$75	\$22	\$0	0.3





Walk-In Cooler/Freezer Inventory & Recommendations

	Existin	g Conditions	Propo	osed Condi	tions		Energy In	npact & Fir	nancial An	alysis			
Location	Cooler/ Freezer Quantit y	Case	ECM #	Install EC Evaporator Fan Motors?	Install Electric Defrost Control?	Install Evaporator Fan Control?	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	1	Cooler (35F to 55F)		No	No	No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Medium Temp Freezer (0F to 30F)		No	No	No	0.0	0	0	\$0	\$0	\$0	0.0

Commercial Refrigerator/Freezer Inventory & Recommendations

	Existin	g Conditions		Proposed	Conditions	Energy In	npact & Fir	nancial An	alysis			
Location	Quantit y	Refrigerator/ Freezer Type	ENERGY STAR Qualified?	ECM #	Install ENERGY STAR Equipment?	Total Peak kW Savings	k\Mb	Total Annual MMBtu Savings	Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	1	Stand-Up Refrigerator, Solid Door (16 - 30 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Stand-Up Refrigerator, Solid Door (31 - 50 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	2	Stand-Up Freezer, Solid Door (31 - 50 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Refrigerator Chest	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Freezer Chest	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0





Cooking Equipment Inventory & Recommendations

	Existing	Conditions		Proposed	Conditions	Energy I	mpact & F	inancial A	nalysis			
Location	Quantity	Equipment Type	High Efficiency Equipement?	ECM #	Install High Efficiency Equipment?	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	1	Gas Convection Oven (Half Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Electric Combination Oven/Steam Cooker (<15 Pans)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Electric Griddle (<2 Feet Width)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	4	Electric Steamer	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0





Plug Load Inventory

Existing Conditions					
Location	Quantit y			ENERGY STAR Qualified ?	
Ce cil SCES	127	Desktop Computer	145.0	Yes	
Cecil SCES	15	Chrome book cart		Yes	
Cecil SCES	6	Server	800.0	Yes	
Cecil SCES	55	Printer - Small	60.0	Yes	
Cecil SCES	5	Printer - Medium	90.0	Yes	
Cecil SCES	4	Printer - Big	220.0	Yes	
Cecil SCES	5	Paper shredder	200.0	Yes	
Cecil SCES	34	Projector	400.0	Yes	
Cecil SCES	10	Microwave Oven	900.0	Yes	
Cecil SCES	10	Refrigerator - Small	80.0	Yes	
Cecil SCES	1	Refrigerator - Medium	90.0	Yes	
Cecil SCES	5	Refrigerator - Large	200.0	Yes	
Cecil SCES	9	Coffee Machine	400.0	Yes	
Cecil SCES	3	CRT DLP	120.0	Yes	
Cecil SCES	4	LED TV	100.0	Yes	
Cecil SCES	37	Smartboards	5.0	Yes	
Cecil SCES	3	Table lamp	40.0	Yes	
Barnegat Board Offices	20	Desktop Computer	140.0	Yes	
Barnegat Board Offices	4	Laptop	60.0	Yes	
Barnegat Board Offices	9	Printer - Small	60.0	Yes	
Barnegat Board Offices	4	Printer - Medium	80.0	Yes	
Barnegat Board Offices	3	Printer - Big	200.0	Yes	
Barnegat Board Offices	2	Paper Shredder	250.0	Yes	
Barnegat Board Offices	1	Microwave	900.0	Yes	
Barnegat Board Offices	1	Refrigerator - Small	60.0	Yes	
Barnegat Board Offices	1	Refrigerator - Large	200.0	Yes	
Barnegat Board Offices	2	Coffee Machine	400.0	Yes	
Barnegat Board Offices	1	Toaster	900.0	Yes	
Barnegat Board Offices	1	Hot and Cold dispenser	520.0	Yes	





APPENDIX B: ENERGY STAR® STATEMENT OF ENERGY PERFORMANCE

EUI is presented in terms of *site energy* and *source energy*. Site energy is the amount of fuel and electricity consumed by a building as reflected in utility bills. Source energy includes fuel consumed to generate electricity consumed at the site, factoring in electric production and distribution losses for the region.



ENERGY STAR[®] Statement of Energy Performance

69

Cecil S Collins Elementary School

Primary Property Type: K-12 School Gross Floor Area (ft²): 91,429

Built: 1980

Score¹

For Year Ending: January 31, 2019 Date Generated: July 31, 2019

1. The ENERGY STAR score is a 1-100 assessment of a building's energy efficiency as compared with similar buildings nationwide, adjusting for climate and business activity.

Property & Contact Information Property Address Property Owner Primary Contact Barnegat Township School District Cecil S Collins Elementary School Stephen Brennan 570 Barnegat Blvd North 550 BARENGAT BLVD. NORTH 550 BARENGAT BLVD. NORTH Barnegat, New Jersey 08005 Barnegat, NJ 08005 Barnegat, NJ 08005 609-698-5800 SBRENNAN@BARNEGATSCHOOLS.COI Property ID: 7071508 Energy Consumption and Energy Use Intensity (EUI) Annual Energy by Fuel National Median Comparison Site EUI Natural Gas (kBtu) 2,476,627 (50%) National Median Site EUI (kBtu/ft2) 54.7 kBtu/ft2 129.5 Electric - Grid (kBtu) 2,522,070 (50%) National Median Source EUI (kBtu/ft2) % Diff from National Median Source EUI -18% Source EUI Annual Emissions Greenhouse Gas Emissions (Metric Tons 387 105.7 kBtu/ft2 CO2e/year) Signature & Stamp of Verifying Professional (Name) verify that the above information is true and correct to the best of my knowledge. Signature: Date: Licensed Professional

Professional Engineer Stamp (if applicable)





APPENDIX C: GLOSSARY

TERM	DEFINITION
Blended Rate	Used to calculate fiscal savings associated with measures. The blended rate is calculated by dividing the amount of your bill by the total energy use. For example, if your bill is \$22,217.22, and you used 266,400 kilowatt-hours, your blended rate is 8.3 cents per kilowatt-hour.
Btu	British thermal unit: a unit of energy equal to the amount of heat required to increase the temperature of one pound of water by one-degree Fahrenheit.
СНР	Combined heat and power. Also referred to as cogeneration.
СОР	Coefficient of performance: a measure of efficiency in terms of useful energy delivered divided by total energy input.
Demand Response	Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives.
DCV	Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need.
US DOE	United States Department of Energy
EC Motor	Electronically commutated motor
ECM	Energy conservation measure
EER	Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input.
EUI	Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance.
Energy Efficiency	Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service.
ENERGY STAR®	ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.
EPA	United States Environmental Protection Agency
Generation	The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil).
GHG	Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from leaving Earth's atmosphere. The net effect is a trapping of absorbed radiation and a tendency to warm the planet's surface.
gpf	Gallons per flush





gpm	Gallon per minute
HID	High intensity discharge: high-output lighting lamps such as high-pressure sodium, metal halide, and mercury vapor.
hp	Horsepower
HPS	High-pressure sodium: a type of HID lamp.
HSPF	Heating seasonal performance factor: a measure of efficiency typically applied to heat pumps. Heating energy provided divided by seasonal energy input.
HVAC	Heating, ventilating, and air conditioning
IHP 2014	US DOE Integral Horsepower rule. The current ruling regarding required electric motor efficiency.
IPLV	Integrated part load value: a measure of the part load efficiency usually applied to chillers.
kBtu	One thousand British thermal units.
kW	Kilowatt: equal to 1,000 Watts.
kWh	Kilowatt-hour: 1,000 Watts of power expended over one hour.
LED	Light emitting diode: a high-efficiency source of light with a long lamp life.
LGEA	Local Government Energy Audit
Load	The total power a building or system is using at any given time.
Measure	A single activity, or installation of a single type of equipment, that is implemented in a building system to reduce total energy consumption.
МН	Metal halide: a type of HID lamp.
MBh	Thousand Btu per hour
MBtu	One thousand British thermal units
MMBtu	One million British thermal units
MV	Mercury Vapor: a type of HID lamp.
NJBPU	New Jersey Board of Public Utilities
NJCEP	New Jersey's Clean Energy Program: NJCEP is a statewide program that offers financial incentives, programs and services for New Jersey residents, business owners and local governments to help them save energy, money and the environment.
psig	Pounds per square inch gauge.
Plug Load	Refers to the amount of power used in a space by products that are powered by means of an ordinary AC plug.
PV	Photovoltaic: refers to an electronic device capable of converting incident light directly into electricity (direct current).





SEER	Seasonal energy efficiency ratio: a measure of efficiency in terms of annual cooling energy provided divided by total electric input.
SEP	Statement of energy performance: a summary document from the ENERGY STAR® Portfolio Manager®.
Simple Payback	The amount of time needed to recoup the funds expended in an investment or to reach the break-even point between investment and savings.
SREC	Solar renewable energy credit: a credit you can earn from the state for energy produced from a photovoltaic array.
T5, T8, T12	A reference to a linear lamp diameter. The number represents increments of $1/8^{\text{th}}$ of an inch.
Temperature Setpoint	The temperature at which a temperature regulating device (thermostat, for example) has been set.
therm	100,000 Btu. Typically used as a measure of natural gas consumption.
tons	A unit of cooling capacity equal to 12,000 Btu/hr.
Turnkey	Provision of a complete product or service that is ready for immediate use
VAV	Variable air volume
VFD	Variable frequency drive: a controller used to vary the speed of an electric motor.
WaterSense™	The symbol for water efficiency. The WaterSense™ program is managed by the EPA.
Watt (W)	Unit of power commonly used to measure electricity use.







Local Government Energy Audit Report

Barnegat Township High School October 31, 2019

Prepared for:

Barnegat Township School District

180 Bengal Blvd

Barnegat, New Jersey 08005

Prepared by:

TRC

900 Route 9 North

Woodbridge, New Jersey 07095

Disclaimer

The goal of this audit report is to identify potential energy efficiency opportunities, help prioritize specific measures for implementation, and provide information about financial incentives that may be available. Most energy conservation measures have received preliminary analysis of feasibility that identifies expected ranges of savings and costs. This level of analysis is usually considered sufficient to establish a basis for further discussion and to help prioritize energy measures.

TRC Companies Inc. (TRC) reviewed the energy conservation measures and estimates of energy savings were reviewed for technical accuracy. Actual, achieved energy savings depend on behavioral factors and other uncontrollable variables and, therefore, estimates of final energy savings are not guaranteed. TRC and the New Jersey Board of Public Utilities (NJBPU) shall in no event be liable should the actual energy savings vary.

TRC bases estimated installation costs on our experience at similar facilities, pricing from local contractors and vendors, and/or cost estimates from RS Means. We encourage the owner of the facility to independently confirm these cost estimates and to obtain multiple estimates when considering measure installations. Actual installation costs can vary widely based on individual measures and conditions. TRC and NJBPU do not guarantee installed cost estimates and shall in no event be held liable should actual installed costs vary from estimates.

New Jersey's Clean Energy Program (NJCEP) incentive values provided in this report are estimates based on program information available at the time of the report. Incentive levels are not guaranteed. The NJBPU reserves the right to extend, modify, or terminate programs without prior notice. Please review all available program incentives and eligibility requirements prior to selecting and installing any energy conservation measures.

The customer and their respective contractor(s) are responsible to implement energy conservation measures in complete conformance with all applicable local, state and federal requirements.

Copyright ©2019 TRC Companies, Inc. All rights reserved.

Reproduction or distribution of the whole, or any part of the contents of this document without written permission of TRC is prohibited. Neither TRC nor any of its employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any data, information, method, product or process disclosed in this document, or represents that its use will not infringe upon any privately-owned rights, including but not limited to, patents, trademarks or copyrights.





Table of Contents

1	Execut	tive Summary	1
	1.1	Planning Your Project	2
	Pick	Your Installation Approach	2
		e Options from Around the State	
2	Existin	g Conditions	7
	2.1	Site Overview	
	2.2	Building Occupancy	
	2.3 2.4	Building Envelope	
	2.4	Air Handling Systems	
		Conditioners	
	2.6	Heating Hot Water Systems	
	2.7	Chilled Water Systems	
	2.8	Domestic Hot Water	
	2.9	Food Service and Refrigerator Equipment	14
	2.10	Plug Load & Vending Machines	
	2.11	Water-Using Systems	
_	2.12	On-Site Generation	
3	Energy	/ Use and Costs	
	3.1	Electricity	
	3.2 3.3	Natural Gas Benchmarking	
		•	
1		king Your Energy Performance	
4		Conservation Measures	
	4.1	Lighting	25
		1: Install LED Fixtures	
		2: Retrofit Fluorescent Fixtures with LED Lamps and Drivers	
	4.2	Lighting Controls	
		4: Install Occupancy Sensor Lighting Controls	
	4.3	Motors	
	ECM	5: Premium Efficiency Motors	27
	4.4	Variable Frequency Drives (VFD)	28
		6: Install VFDs on Constant Volume (CV) Fans	
	ECM	7: Install VFDs on Chilled Water Pumps	29
	4.5	Electric Unitary HVAC	29
	ECM	8: Install High-Efficiency Air Conditioning Units	29






	EC	M 9: Install High-Efficiency PTAC/PTHP	29
	4.6	Electric Chillers	30
	EC	M 10: Install High-Efficiency Chillers	30
	4.7	Gas-Fired Heating	31
		M 11: Install High-Efficiency Furnaces	
	4.8	Domestic Water Heating	32
	EC	CM 13: Install Low-Flow DHW Devices	
	4.9	Food Service & Refrigeration Measures	32
	EC	CM 14: Vending Machine Control	
5		gy Efficient Best Practices	
		ergy Tracking with ENERGY STAR® Portfolio Manager®	
		ghting Controls	
	_	otor Short Cycling Reduction	
	Th	ermostat Schedules and Temperature Resets	33
	AC	System Evaporator/Condenser Coil Cleaning	33
		/AC Filter Cleaning and Replacement	
		iler Maintenance	
		rnace Maintenance	
		ater Heater Maintenance	
		ug Load Controls	
		ater Conservation	
		ocurement Strategies	
6	On-s	ite Generation	36
	6.1	Solar Photovoltaic	37
	6.2	Combined Heat and Power	38
7	Proj	ect Funding and Incentives	39
	7.1	SmartStart	40
	7.2	Direct Install	41
	7.3	Pay for Performance - Existing Buildings	42
	7.4	Combined Heat and Power	43
	7.5	Energy Savings Improvement Program	44
	7.6	SREC Registration Program	45
8	Ener	gy Purchasing and Procurement Strategies	46
	8.1	Retail Electric Supply Options	46
	8.2	Retail Natural Gas Supply Options	46
Αŗ	pendi	x A: Equipment Inventory & Recommendations	A -1
		x B: ENERGY STAR® Statement of Energy Performance	
_	-	x C: Glossary	





1 EXECUTIVE SUMMARY

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) report for Barnegat Township High School. This report provides you with information about the High School's energy use, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help make changes in the High School. TRC conducted this study as part of a comprehensive effort to assist New Jersey school districts and local governments in controlling their energy costs and to help protect our environment by reducing statewide energy consumption.

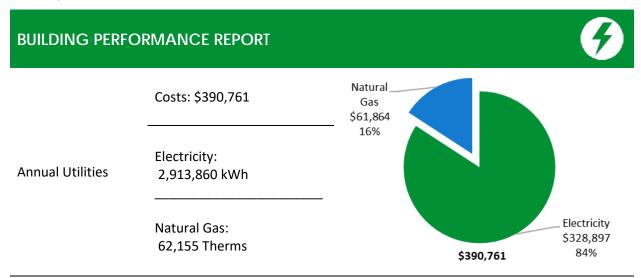

ENERGY STAR® Benchmarking Score 21 (1-100 scale) This building performs at or below the national average. This report contains suggestions about how to improve building performance and reduce energy costs.

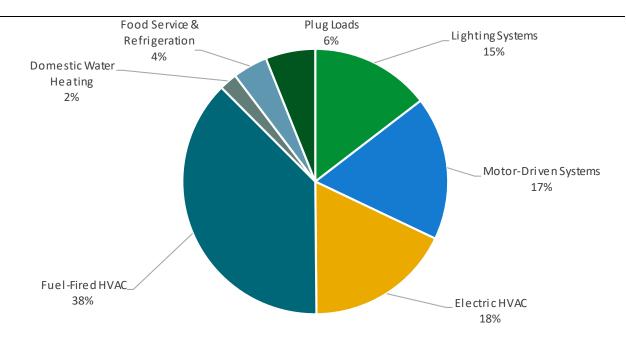


Figure 1 - Energy Use by System






POTENTIAL IMPROVEMENTS



This energy audit considered a range of potential energy improvements in your building. Costs and savings will vary between improvements. Presented below are two potential scopes of work for your consideration.


Scenario 1: Full Package (all evaluated measures)

Installation Cost		\$1,339,818
Potential Rebates & Incentives ¹		\$128,560
Annual Cost Savings		\$94,136
Annual Energy Savings		:y: 832,785 kWh Gas: 137 Therms
Greenhouse Gas Emission Savings		420 Tons
Simple Payback		12.9 Years
Site Energy Savings (all utilities)		18%



Scenario 2: Cost Effective Package²

Installation Cost	\$373,533
Potential Rebates & Incentive	\$44,862
Annual Cost Savings	\$77,600
Annual Energy Savings	Electricity: 688,581 kWh
Greenhouse Gas Emission Sav	vings 346 Tons
Simple Payback	4.2 Years
Site Energy Savings (all utilitie	es) 14%



On-site Generation Potential

Photovoltaic	High
Combined Heat and Power	None

¹ Incentives are based on current SmartStart Prescriptive incentives. Other program incentives may apply.

² A cost-effective measure is defined as one where the simple payback does not exceed two-thirds of the expected proposed equipment useful life. Simple payback is based on the net measure cost after potential incentives.





#	Energy Conservation Measure	Cost Effective?	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades		391,404	79.8	-68	\$43,505	\$207,670	\$25,447	\$182,223	4.2	386,216
ECM 1	Install LED Fixtures	Yes	64,972	7.4	0	\$7,334	\$102,761	\$600	\$102,161	13.9	65,426
ECM 2	Retrofit Fluorescent Fixtures with LED Lamps and Drivers	Yes	156	0.1	0	\$17	\$206	\$30	\$176	10.2	153
ECM 3	Retrofit Fixtures with LED Lamps	Yes	326,276	72.3	-68	\$36,155	\$104,702	\$24,817	\$79,885	2.2	320,637
Lighting	Control Measures		7,557	1.3	-2	\$837	\$3,822	\$325	\$3,497	4.2	7,425
ECM 4	Install Occupancy Sensor Lighting Controls	Yes	7,557	1.3	-2	\$837	\$3,822	\$325	\$3,497	4.2	7,425
Motor L	pgrades		5,469	1.0	0	\$617	\$4,495	\$0	\$4,495	7.3	5,507
ECM 5	Premium Efficiency Motors	Yes	5,469	1.0	0	\$617	\$4,495	\$0	\$4,495	7.3	5,507
Variable	Frequency Drive (VFD) Measures		276,092	66.7	0	\$31,163	\$156,251	\$18,840	\$137,411	4.4	278,023
ECM 6	Install VFDs on Constant Volume (CV) Fans	Yes	246,205	57.4	0	\$27,790	\$134,561	\$15,840	\$118,721	4.3	247,926
ECM 7	Install VFDs on Chilled Water Pumps	Yes	29,888	9.3	0	\$3,374	\$21,690	\$3,000	\$18,690	5.5	30,097
Electric	Unitary HVAC Measures		3,595	1.6	0	\$406	\$21,978	\$498	\$21,480	52.9	3,620
ECM 8	Install High Efficiency Air Conditioning Units	No	1,685	0.8	0	\$190	\$9,341	\$69	\$9,272	48.8	1,697
ECM 9	Install High Efficiency PTAC/PTHP	No	1,911	0.9	0	\$216	\$12,638	\$429	\$12,209	56.6	1,924
Electric	Chiller Replacement		140,608	90.6	0	\$15,871	\$932,906	\$82,800	\$850,106	53.6	141,591
ECM 10	Install High Efficiency Chillers	No	140,608	90.6	0	\$15,871	\$932,906	\$82,800	\$850,106	53.6	141,591
Gas Hea	ting (HVAC/Process) Replacement		0	0.0	26	\$259	\$11,401	\$400	\$11,001	42.5	3,047
ECM 11	Install High Efficiency Furnaces	No	0	0.0	22	\$220	\$9,063	\$400	\$8,663	39.4	2,588
ECM 12	Install High Efficiency Unit Heaters	No	0	0.0	4	\$39	\$2,338	\$0	\$2,338	60.0	458
Domest	ic Water Heating Upgrade		0	0.0	57	\$567	\$143	\$0	\$143	0.3	6,666
ECM 13	Install Low-Flow DHW Devices	Yes	0	0.0	57	\$567	\$143	\$0	\$143	0.3	6,666
Food Se	Food Service & Refrigeration Measures		8,059	0.9	0	\$910	\$1,150	\$250	\$900	1.0	8,116
ECM 14	Vending Machine Control	Yes	8,059	0.9	0	\$910	\$1,150	\$250	\$900	1.0	8,116
	TOTALS (COST EFFECTIVE MEASURES)		688,581	149.7	-12	\$77,600	\$373,533	\$44,862	\$328,671	4.2	691,953
	TOTALS (ALL MEASURES)		832,785	241.9	14	\$94,136	\$1,339,818	\$128,560	\$1,211,258	12.9	840,211

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

Figure 2 – Evaluated Energy Improvements

For more detail on each evaluated energy improvement and a break out of cost-effective improvements, see **Section 4: Energy Conservation Measures**.

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





1.1 Planning Your Project

Careful planning makes for a successful energy project. When considering this scope of work, you will have some decisions to make, such as:

- How will the project be funded and/or financed?
- Is it best to pursue individual ECMs, groups of ECMs, or use a comprehensive approach where all ECMs are installed together?
- Are there other facility improvements that should happen at the same time?

Pick Your Installation Approach

New Jersey's Clean Energy Programs give you the flexibility to do a little or a lot. Rebates, incentives, and financing are available to help reduce both your installation costs and your energy bills. If you are planning to take advantage of these programs, make sure to review incentive program guidelines before proceeding. This is important because in most cases you will need to submit applications for the incentives before purchasing materials or starting installation.

The potential ECMs identified for this building likely qualify for multiple incentive and funding programs. Based on current program rules and requirements, your measures are likely to qualify for the following programs:

	Energy Conservation Measure	SmartStart	Direct Install	Pay For Performance
ECM 1	Install LED Fixtures	Х		X
ECM 2	Retrofit Fluorescent Fixtures with LED Lamps and Drivers	×		Х
ECM 3	Retrofit Fixtures with LED Lamps	Х		Х
ECM 4	Install Occupancy Sensor Lighting Controls	Х		Х
ECM 5	Premium Efficiency Motors			Х
ECM 6	Install VFDs on Constant Volume (CV) HVAC	Х		Х
ECM 7	Install VFDs on Chilled Water Pumps	Х		Х
ECM 8	Install High Efficiency Electric AC	Х		Х
ECM 9	Install High Efficiency Packaged Terminal AC/HP	Х		Х
ECM 10	Install High Efficiency Chillers	Х		Х
ECM 11	Install High Efficiency Furnaces	Х		Х
ECM 12	Install High Efficiency Unit Heaters	Х		Х
ECM 13	Install Low-Flow Domestic Hot Water Devices			Х
ECM 14	Vending Machine Control			Х

Figure 3 - Funding Options







New Jersey's Clean Energy Programs At-A-Glance

	SmartStart Flexibility to install at your own pace	Direct Install Turnkey installation	Pay for Performance Whole building upgrades
Who should use it?	Buildings installing individual measures or small group of measures.	Small to mid-size Mid to large size	
How does it work?	Use in-house staff or your preferred contractor.		Whole-building approach to energy upgrades designed to reduce energy use by at least 15%. The more you save, the higher the incentives.
What are the Incentives? Fixed incentives for specific energy efficiency measures.		Incentives pay up to 70% of eligible costs, up to \$125,000 per project. You pay the remaining 30% directly to the contractor.	Up to 25% of installation cost, calculated based on level of energy savings per square foot.
How do I participate?	for the specific contractor in your equipment to be region.		Contact a pre-qualified Partner to develop your Energy Reduction Plan and set your energy savings targets.

Take the next step by visiting **www.njcleanenergy.com** for program details, applications, and to contact a qualified contractor.





Individual Measures with SmartStart

For facilities wishing to pursue only selected individual measures (or planning to phase implementation of selected measures over multiple years), incentives are available through the SmartStart program. To participate, you can use internal resources or an outside firm or contractor to perform the final design of the ECM(s) and install the equipment. Program pre-approval is required for some SmartStart incentives, so only after receiving pre-approval should you proceed with ECM installation.

Turnkey Installation with Direct Install

The Direct Install program provides turnkey installation of multiple measures through an authorized network of participating contractors. This program can provide substantially higher incentives than SmartStart, up to 70% of the cost of selected measures. Direct Install contractors will assess and verify individual measure eligibility and, in most cases, they perform the installation work. The Direct Install program is available to sites with an average peak demand of less than 200 kW.

Whole Building Approach with Pay for Performance

Pay for Performance can be a good option for medium to large sized facilities to achieve deep energy savings. Pay for Performance allows you to install as many measures as possible under a single project as well as address measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program (ESIP) loan also use this program. Pay for Performance works for larger customers with a peak demand over 200 kW. The minimum installed scope of work must include at least two unique measures resulting in at least 15% energy savings, where lighting cannot make up the majority of the savings.

More Options from Around the State

Financing and Planning Support with the Energy Savings Improvement Program (ESIP)

For larger facilities with limited capital availability to implement ECMs, project financing may be available through the ESIP. Supported directly by the NJBPU, ESIP provides government agencies with project development, design, and implementation support services, as well as, attractive financing for implementing ECMs. You have already taken the first step as an LGEA customer, because this report is required to participate in ESIP.

Resiliency with Return on Investment through Combined Heat & Power (CHP)

The CHP program provides incentives for combined heat and power (aka cogeneration) and waste heat to power projects. Combined heat and power systems generate power on-site and recover heat from the generation system to meet on-site thermal loads. Waste heat to power systems use waste heat to generate power. You will work with a qualified developer who will design a system that meets your building's heating and cooling needs.

Ongoing Electric Savings with Demand Response

The Demand Response Energy Aggregator program reduces electric loads at commercial facilities when wholesale electricity prices are high or when the reliability of the electric grid is threatened due to peak power demand. By enabling commercial facilities to reduce electric demand during times of peak demand, the grid is made more reliable and overall transmission costs are reduced for all ratepayers. Curtailment service providers provide regular payments to medium and large consumers of electric power for their participation in demand response (DR) programs. Program participation is voluntary, and facilities receive payments regardless of whether they are called upon to curtail their load during times of peak demand.





2 EXISTING CONDITIONS

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) Report for Barnegat Township High School. This report provides information on how the High School uses energy, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help you implement the ECMs. This report also contains valuable information on financial incentives from New Jersey's Clean Energy Program (NJCEP) for implementing ECMs.

TRC conducted this study as part of a comprehensive effort to assist New Jersey educational and local government facilities in controlling energy costs and protecting our environment by offering a wide range of energy management options and advice.

For a detailed list of the locations and recommended energy conservation measures for all inventoried equipment, see **Appendix A: Equipment Inventory & Recommendations.**

2.1 Site Overview

On July 11, 2019, TRC performed an energy audit at Barnegat Township High School located in Barnegat, New Jersey. TRC met with Neil Piro to review the High School operations and help focus our investigation on specific energy-using systems.

Barnegat Township High School is a two-story, 201,214 square foot building built in 2004. Spaces include: classrooms, a gymnasium, an auditorium, offices, a cafeteria, corridors, stairwells, a commercial kitchen, and mechanical space. The High School has onsite generation and is 100% heated and cooled.

2.2 Building Occupancy

The High School is occupied from September through June. Typical weekday occupancy is approximately 100 staff and 992 students.

Building Name	Weekday/Weekend	Operating Schedule	
Barnegat Township High School	Weekday	6:00 AM - 8:00 PM	
	Weekend	Saturday: 6:00 AM - 8:00 PM	
		Sunday: 9:00 AM - 9:00 PM (events only)	

Figure 4 - Building Occupancy Schedule





2.3 Building Envelope

Building walls are concrete block over structural steel with a concrete block facade. The dividing walls are made of concrete masonry units. The roof is mainly flat with some portions curved. It is covered with black membrane and in good condition. Some pitched portions of the roof are made of metal cladding panels.

Most of the windows are double-glazed that have aluminum frames with a thermal break. The glass-to-frame seals are in good condition. Exterior doors have metal reinforced vinyl doors and are in good condition.



Facade



Windows



Exterior door



Roof






2.4 Lighting Systems

The primary interior lighting system uses 32-Watt linear fluorescent T8 lamps. Several areas are illuminated with LED tubes, and T12 fluorescent lamps remain in service in the chiller room. Additionally, there are a significant number of 32-watt compact fluorescent lamps (CFL). Typically, T8 fluorescent lamps use electronic ballasts.

Fixture types include 2-, 3-, or 4-lamp, 2- or 4-foot long troffers, surface-mounted fixtures, and 2-foot fixtures with linear tube lamps. Most fixtures are controlled using wall switches. The gym, auxiliary gym, and wrestling weight room are lit using T5 high output 4-foot 4-lamp fixtures. Lighting in the wrestling weight room and auxiliary gym are controlled using wall switches while the main gym has remotemounted occupancy sensors. Most fixtures are in good condition.

All exit signs are LED units. Interior lighting levels were generally sufficient.


The exterior fixtures consist mainly of 26- and 32-Watt 4-pin CFL fixtures and high intensity discharge (HID) wall pack and pole-mounted parking lot fixtures. A few LED wall-mounted fixtures are in use. The exterior fixtures are controlled using photocells or timeclocks.



T5 Gym Fixtures



Exterior Pole Fixtures



CFL Wall-mounted Fixtures



Linear T8 Fixtures





2.5 Air Handling Systems

Several air handling units with hot water and chilled water coils distribute conditioned air to most major areas throughout the school. Some of these are variable air volume system, and the rest are constant volume system. System supply fans range from 1.5 hp to 20 hp, and many systems include return fans. All of the units are original to the school and are at or beyond the end of their useful life.

Air Conditioners

The security office is cooled using a packaged terminal AC unit of 6.6-ton capacity and an EER of 9.5. The data room and the elevator room are cooled using split AC units of 3-ton and 0.75-ton capacities, respectively. These units have an average EER of 10.8. All units have passed their useful life and have been evaluated for replacement.





Air Handling Units

Air Handling Units

2.6 Heating Hot Water Systems

Two condensing Aerco hot water boilers with an output capacity of 1760 MBH and an efficiency of 88% provide space heating in the new addition section of the school via air handlers. These units were installed in the year 2007 and are in good condition. The hot water is circulated to the air handling units using two variable speed 3 hp hot water pumps.

The older section of the school has 16 operational individual modules of a 32 series boiler system. The auditor noted that the boiler is operating in non-condensing mode, with an output capacity of 335.16 and an efficiency of 84%. Hot water is distributed to the air handling units through two variable speed 20 hp hot water pumps. The boilers are original to the building and are approaching the end of their useful life. When these boilers are due for replacement, we suggest the facility representatives work with the design team to develop a design using fewer modular condensing boilers to improve efficiency, maintain redundancy, and part load operation, while reducing the number of units to maintain.





Currently, the system affords a lot of redundancy and a significant capacity for load adjustment. We recommend a more detailed evaluation of the boiler system to determine whether some relatively inexpensive system adjustments might afford some short-term savings while system replacement is under consideration.

There is a gas-fired furnace and a warm air unit heater in the GUH area with output capacities of 400 MBh and 80 MBh, respectively. These have been evaluated for replacement.

The space and loop temperatures in the school are controlled using an EMS.



Modular Boilers



VFD



Modular Boilers



Condensing Boilers - New Addition





2.7 Chilled Water Systems

There are four chillers serving most of the school's cooling load. The existing building is served by three air-cooled screw chillers of 250-ton cooling capacities. The new-addition of the school is cooled by an air-cooled scroll chiller with a 150-ton cooling capacity.

The chillers are configured in a primary distribution loop with two constant flow pumps (CWP 1, 2-25hp) and four variable flow secondary pumps (CHWP 3, 4-3hp, and CHWP 6, 7-5hp).

The chiller plant supplies chilled water to all the air handlers at the High School. The supply and space temperatures are controlled using an EMS.

All of the chillers have passed their useful life and have been evaluated for replacement.



Carrier - Chiller



Mammoth Chiller



Carrier - Chiller



Mammoth Chiller






2.8 Domestic Hot Water

One gas-fired water heater serves the High School's domestic hot water needs. The Rheem gas-fired unit has an input capacity of 715 MBh and a total tank capacity of 270 gallons with three tanks. It is approximately 80% efficient. The unit was installed in 2018 and is new and in good condition.

Hot water is distributed to the end uses using fractional horse power circulating pumps.



Hot Water Heater





2.9 Food Service and Refrigerator Equipment

The kitchen has a mix of gas and electric equipment including a gas convection oven, a steamer, and a griddle that are used to prepare meals for students. Most cooking is done using a convection gas-fired oven. Bulk prepared foods are held in several electric holding cabinets. Equipment is high-efficiency and in good condition.

The kitchen has several stand-up solid door refrigerators. There are also refrigerator and freezer chests. All equipment is standard efficiency and appears to be in good condition.

The walk-in refrigerator has an estimated 1.6-ton compressor and a single-fan evaporator. The walk-in medium temperature freezer has an approximately 2.5-ton compressor and a two-fan evaporator.



Warmer



Oven



Reach-in Refrigerator



 $Gas\ Burner$





2.10 Plug Load & Vending Machines

The utility bill analysis indicates that plug loads consume approximately 6% percent of total building energy use. This is higher than a typical building.

You may wish to consider paying particular attention to minimizing your plug load usage. This report makes suggestions for ECMs in this area, as well as Energy Efficient Best Practices.

There are approximately 435 computer work stations throughout the High School. Plug loads throughout the building include general café and office equipment. There are classroom typical loads such as Smart Boards, projectors, and fans. There are several residential-style refrigerators throughout the building that are used to store food for the staff. These vary in condition and efficiency.

There are five refrigerated beverage vending machines and four non-refrigerated vending machines. Vending machines are not equipped with occupancy-based controls.



Vending Machine



Vending Machine

2.11 Water-Using Systems

Faucet flow rates are at 1.5 gallons per minute (gpm) or higher. Toilets are rated at 1.6 gallons per flush (gpf) and urinals are rated at 1.0 gpf.

2.12 On-Site Generation

Barnegat High School has a photovoltaic (PV) array that was installed in 2011. This system provides approximately 17% of the electricity used at the High School.



Solar PV



Solar PV






3 ENERGY USE AND COSTS

Twelve months of utility billing data are used to develop annual energy consumption and cost data. This information creates a profile of the annual energy consumption and energy costs.

Utility Summary							
Fuel	Usage	Cost					
Electricity	2,913,860 kWh	\$328,897					
Natural Gas	62,155 Therms	\$61,864					
Total	\$390,761						



An energy balance identifies and quantifies energy use in your various building systems. This can highlight areas with the most potential for improvement. This energy balance was developed using calculated energy use for each of the end uses noted in the figure.

The energy auditor collects information regarding equipment operating hours, capacity, efficiency, and other operational parameters from facility staff, drawings, and on-site observations. This information is used as the inputs to calculate the existing conditions energy use for the site. The calculated energy use is then compared to the historical energy use and the initial inputs are revised, as necessary, to balance the calculated energy use to the historical energy use.





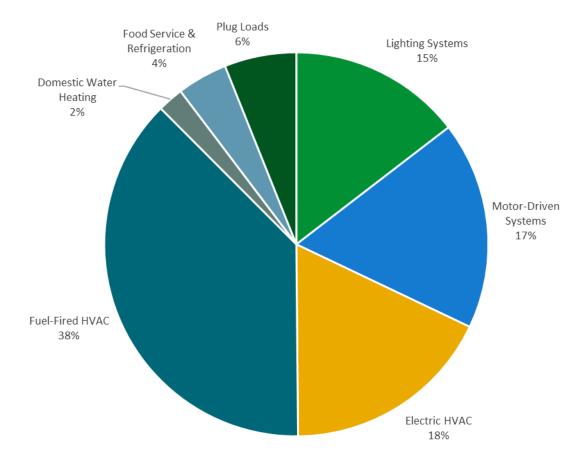



Figure 5 - Energy Balance





3.1 Electricity

JCP&L delivers electricity under rate class GSS, with electric production provided by South Jersey Energy/TriEagle Energy, a third-party supplier.

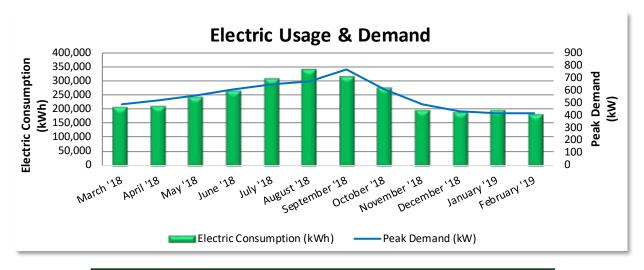

Electric Billing Data							
Period Ending	Days in Period	Electric Usage (kWh)	Demand (kW)	Demand Cost	Total Electric Cost		
3/22/18	30	205,993	487	\$3,213	\$23,074		
4/20/18	29	211,521	521	\$3,323	\$24,082		
5/22/18	32	240,967	563	\$3,531	\$27,065		
6/21/18	30	264,846	611	\$4,109	\$30,039		
7/23/18	32	306,460	647	\$4,352	\$34,143		
8/22/18	30	337,513	673	\$4,527	\$37,060		
9/21/18	30	312,796	765	\$5,146	\$34,771		
10/22/18	31	272,746	606	\$3,802	\$32,979		
11/20/18	29	194,257	485	\$3,043	\$20,609		
12/20/18	30	189,125	431	\$2,700	\$22,632		
1/22/19	33	197,346	419	\$2,628	\$21,718		
2/20/19	29	180,289	421	\$2,637	\$20,725		
Totals	365	2,913,860	765	\$43,010	\$328,897		
Annual	365	2,913,860	765	\$43,010	\$328,897		

Notes:


- Peak demand of 765 kW occurred in September '18.
- The average electric cost over the past 12 months was \$0.113/kWh, which is the blended rate that includes energy supply, distribution, demand, and other charges. This report uses this blended rate to estimate energy cost savings.





3.2 Natural Gas

New Jersey Natural Gas delivers natural gas under rate class South Jersey Energy, with natural gas supply provided by GSL, a third-party supplier.

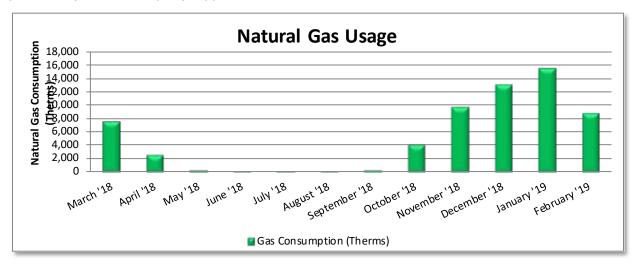

	Gas	s Billing Data	
Period Ending	Days in Period	Natural Gas Usage (Therms)	Natural Gas Cost
4/6/18	30	7,544	\$6,438
5/3/18	27	2,551	\$2,499
6/6/18	34	390	\$862
7/6/18	30	224	\$690
8/3/18	28	147	\$632
8/29/18	26	152	\$635
10/1/18	33	352	\$876
11/2/18	32	4,181	\$3,816
12/5/18	33	9,633	\$8,002
1/5/19	31	12,962	\$14,185
2/5/19	31	15,313	\$14,962
3/7/19	30	8,707	\$8,268
Totals	365	62,155	\$61,864
Annual	365	62,155	\$61,864

Notes:

• The average gas cost for the past 12 months is \$0.995/therm, which is the blended rate used throughout the analysis.





3.3 Benchmarking

Your building was benchmarked using the United States Environmental Protection Agency's (EPA) *Portfolio Manager®* software. Benchmarking compares your building's energy use to that of similar buildings across the country, while neutralizing variations due to location, occupancy and operating hours. Some building types can be scored with a 1-100 ranking of a building's energy performance relative to the national building market. A score of 50 represents the national average and a score of 100 is best.

This ENERGY STAR® benchmarking score provides a comprehensive snapshot of your building's energy performance. It assesses the building's physical assets, operations, and occupant behavior, which is compiled into a quick and easy-to-understand score.

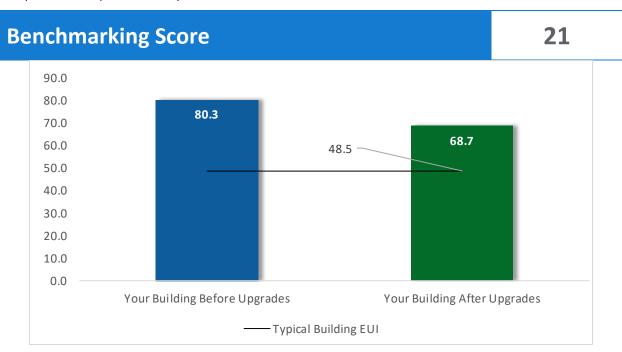


Figure 6 - Energy Use Intensity Comparison

This building performs at, or below the national average. This report contains suggestions about how to improve building performance and reduce energy costs.

Energy use intensity (EUI) measures energy consumption per square foot and is the standard metric for comparing buildings' energy performance. A lower EUI means better performance and less energy consumed. A number of factors can cause as building to vary from the "typical" energy usage. Local weather conditions, building age and insulation levels, equipment efficiency, daily occupancy hours, changes in occupancy throughout the year, equipment operating hours, and occupant behavior all contribute to a building's energy use and the benchmarking score.





Tracking Your Energy Performance

Keeping track of your energy use on a monthly basis is one of the best ways to keep energy costs in check. Update your utility information in Portfolio Manager® regularly, so that you can keep track of your building's performance.

We have created a Portfolio Manager® account for your facility and we have already entered the monthly utility data shown above for you. Account login information for your account will be sent via email.

Free online training is available to help you use ENERGY STAR® Portfolio Manager® to track your building's performance at: https://www.energystar.gov/buildings/training.

For more information on ENERGY STAR® and Portfolio Manager®, visit their website³.

LGEA Report - Barnegat Township School District Barnegat Township High School

³ https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/earn-recognition/energy-star-certification/how-app-1.





4 ENERGY CONSERVATION MEASURES

The goal of this audit report is to identify and evaluate potential energy efficiency improvements, provide information about the cost effectiveness of those improvements, and recognize potential financial incentives from NJBPU. Most energy conservation measures have received preliminary analysis of feasibility which identifies expected ranges of savings and costs. This level of analysis is typically sufficient to demonstrate project cost-effectiveness and help prioritize energy measures.

Calculations of energy use and savings are based on the current version of the *New Jersey's Clean Energy Program Protocols to Measure Resource Savings*, which is approved by the NJBPU. Further analysis or investigation may be required to calculate more precise savings based on specific circumstances.

Operation and maintenance costs for the proposed new equipment will generally be lower than the current costs for the existing equipment—especially if the existing equipment is at or past its normal useful life. We have conservatively assumed there to be no impact on overall maintenance costs over the life of the equipment.

Financial incentives are based on the current NJCEP prescriptive SmartStart program. A higher level of investigation may be necessary to support any SmartStart Custom, Pay for Performance, or Direct Install incentive applications. Some measures and proposed upgrades may be eligible for higher incentives than those shown below through other NJCEP programs described in a following section of this report.





#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades	391,404	79.8	-68	\$43,505	\$207,670	\$25,447	\$182,223	4.2	386,216
ECM 1	Install LED Fixtures	64,972	7.4	0	\$7,334	\$102,761	\$600	\$102,161	13.9	65,426
ECM 2	Retrofit Fluorescent Fixtures with LED Lamps and Drivers	156	0.1	0	\$17	\$206	\$30	\$176	10.2	153
ECM 3	Retrofit Fixtures with LED Lamps	326,276	72.3	-68	\$36,155	\$104,702	\$24,817	\$79,885	2.2	320,637
Lighting	Control Measures	7,557	1.3	-2	\$837	\$3,822	\$325	\$3,497	4.2	7,425
ECM 4	Install Occupancy Sensor Lighting Controls	7,557	1.3	-2	\$837	\$3,822	\$325	\$3,497	4.2	7,425
Motor U	pgrades	5,469	1.0	0	\$617	\$4,495	\$0	\$4,495	7.3	5,507
ECM 5	Premium Efficiency Motors	5,469	1.0	0	\$617	\$4,495	\$0	\$4,495	7.3	5,507
Variable	Frequency Drive (VFD) Measures	276,092	66.7	0	\$31,163	\$156,251	\$18,840	\$137,411	4.4	278,023
ECM 6	Install VFDs on Constant Volume (CV) Fans	246,205	57.4	0	\$27,790	\$134,561	\$15,840	\$118,721	4.3	247,926
ECM 7	Install VFDs on Chilled Water Pumps	29,888	9.3	0	\$3,374	\$21,690	\$3,000	\$18,690	5.5	30,097
Electric l	Jnitary HVAC Measures	3,595	1.6	0	\$406	\$21,978	\$498	\$21,480	52.9	3,620
ECM 8	Install High Efficiency Air Conditioning Units	1,685	0.8	0	\$190	\$9,341	\$69	\$9,272	48.8	1,697
ECM 9	Install High Efficiency PTAC/PTHP	1,911	0.9	0	\$216	\$12,638	\$429	\$12,209	56.6	1,924
Electric (Chiller Replacement	140,608	90.6	0	\$15,871	\$932,906	\$82,800	\$850,106	53.6	141,591
ECM 10	Install High Efficiency Chillers	140,608	90.6	0	\$15,871	\$932,906	\$82,800	\$850,106	53.6	141,591
Gas Heat	ing (HVAC/Process) Replacement	0	0.0	26	\$259	\$11,401	\$400	\$11,001	42.5	3,047
ECM 11	Install High Efficiency Furnaces	0	0.0	22	\$220	\$9,063	\$400	\$8,663	39.4	2,588
ECM 12	Install High Efficiency Unit Heaters	0	0.0	4	\$39	\$2,338	\$0	\$2,338	60.0	458
Domesti	c Water Heating Upgrade	0	0.0	57	\$567	\$143	\$0	\$143	0.3	6,666
ECM 13	Install Low-Flow DHW Devices	0	0.0	57	\$567	\$143	\$0	\$143	0.3	6,666
Food Sei	vice & Refrigeration Measures	8,059	0.9	0	\$910	\$1,150	\$250	\$900	1.0	8,116
ECM 14	Vending Machine Control	8,059	0.9	0	\$910	\$1,150	\$250	\$900	1.0	8,116
	TOTALS	832,785	241.9	14	\$94,136	\$1,339,818	\$128,560	\$1,211,258	12.9	840,211

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance

Figure 7 – All Evaluated ECMs

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades	391,404	79.8	-68	\$43,505	\$207,670	\$25,447	\$182,223	4.2	386,216
ECM 1	Install LED Fixtures	64,972	7.4	0	\$7,334	\$102,761	\$600	\$102,161	13.9	65,426
ECM 2	Retrofit Fluorescent Fixtures with LED Lamps and Drivers	156	0.1	0	\$17	\$206	\$30	\$176	10.2	153
ECM 3	Retrofit Fixtures with LED Lamps	326,276	72.3	-68	\$36,155	\$104,702	\$24,817	\$79,885	2.2	320,637
Lighting	Control Measures	7,557	1.3	-2	\$837	\$3,822	\$325	\$3,497	4.2	7,425
ECM 4	Install Occupancy Sensor Lighting Controls	7,557	1.3	-2	\$837	\$3,822	\$325	\$3,497	4.2	7,425
Motor U	pgrades	5,469	1.0	0	\$617	\$4,495	\$0	\$4,495	7.3	5,507
ECM 5	Premium Efficiency Motors	5,469	1.0	0	\$617	\$4,495	\$0	\$4,495	7.3	5,507
Variable	Frequency Drive (VFD) Measures	276,092	66.7	0	\$31,163	\$156,251	\$18,840	\$137,411	4.4	278,023
ECM 6	Install VFDs on Constant Volume (CV) Fans	246,205	57.4	0	\$27,790	\$134,561	\$15,840	\$118,721	4.3	247,926
ECM 7	Install VFDs on Chilled Water Pumps	29,888	9.3	0	\$3,374	\$21,690	\$3,000	\$18,690	5.5	30,097
Domesti	ic Water Heating Upgrade	0	0.0	57	\$567	\$143	\$0	\$143	0.3	6,666
ECM 13	Install Low-Flow DHW Devices	0	0.0	57	\$567	\$143	\$0	\$143	0.3	6,666
Food Sei	rvice & Refrigeration Measures	8,059	0.9	0	\$910	\$1,150	\$250	\$900	1.0	8,116
ECM 14	Vending Machine Control	8,059	0.9	0	\$910	\$1,150	\$250	\$900	1.0	8,116
	TOTALS	688,581	149.7	-12	\$77,600	\$373,533	\$44,862	\$328,671	4.2	691,953

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance

Figure 8 – Cost Effective ECMs

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





4.1 Lighting

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)		Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Lighting	g Upgrades	391,404	79.8	-68	\$43,505	\$207,670	\$25,447	\$182,223	4.2	386,216
ECM 1	Install LED Fixtures	64,972	7.4	0	\$7,334	\$102,761	\$600	\$102,161	13.9	65,426
ECM 2	Retrofit Fluores cent Fixtures with LED Lamps and Drivers	156	0.1	0	\$17	\$206	\$30	\$176	10.2	153
ECM 3	Retrofit Fixtures with LED Lamps	326,276	72.3	-68	\$36,155	\$104,702	\$24,817	\$79,885	2.2	320,637

When considering lighting upgrades, we suggest using a comprehensive design approach that simultaneously upgrades lighting fixtures and controls to maximize energy savings and improve occupant lighting. Comprehensive design will also consider appropriate lighting levels for different space types to make sure that the right amount of light is delivered where needed. If conversion to LED light sources is proposed, we suggest converting all fixtures of a specific lighting type (e.g. linear fluorescent) to LED lamps to minimize the number of lamp types in use at the High School, which should help reduce future maintenance costs.

ECM 1: Install LED Fixtures

Replace existing fixtures containing HID lamps with new LED light fixtures. This measure saves energy by installing LEDs, which use less power than other technologies with a comparable light output.

In some cases, HID fixtures can be retrofit with screw-based LED lamps. Replacing an existing HID fixture with a new LED fixture will generally provide better overall lighting optics; however, replacing the HID lamp with a LED screw-in lamp is typically a less expensive retrofit. We recommend you work with your lighting contractor to determine which retrofit solution is best suited to your needs and will be compatible with the existing fixture(s).

Maintenance savings may also be achieved, as LED lamps last longer than other light sources and therefore do not need to be replaced as often.

Affected building areas: exterior fixtures.

ECM 2: Retrofit Fluorescent Fixtures with LED Lamps and Drivers

Retrofit fluorescent fixtures by removing the fluorescent tubes and ballasts and replacing them with LED tubes and LED drivers (if necessary), which are designed to be used in retrofitted fluorescent fixtures.

The measure uses the existing fixture housing but replaces the electric components with more efficient lighting technology, which uses less power than other lighting technologies while providing equivalent lighting output. Maintenance savings may also be achieved, as LED tubes last longer than fluorescent tubes and therefore do not need to be replaced as often.

Affected building areas: all areas with fluorescent fixtures with T12 tubes.





ECM 3: Retrofit Fixtures with LED Lamps

Replace fluorescent or incandescent lamps with LED lamps. Many LED tubes are direct replacements for existing fluorescent tubes and can be installed while leaving the fluorescent fixture ballast in place. LED lamps can be used in existing fixtures as direct replacements for most other lighting technologies.

This measure saves energy by installing LEDs, which use less power than other lighting technologies while providing equivalent lighting output for the space. Maintenance savings may also be available, as longer-lasting LEDs lamps will not need to be replaced as often as the existing lamps.

Affected building areas: all areas with fluorescent fixtures with T8 tubes, CFL, or incandescent lamps.

4.2 Lighting Controls

#	Energy Conservation Measure		Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)				CO ₂ e Emissions Reduction (lbs)
Lighting	Control Measures	7,557	1.3	-2	\$837	\$3,822	\$325	\$3,497	4.2	7,425
I F (IVI 4	Install Occupancy Sensor Lighting Controls	7,557	1.3	-2	\$837	\$3,822	\$325	\$3,497	4.2	7,425

Lighting controls reduce energy use by turning off or lowering lighting fixture power levels when not in use. A comprehensive approach to lighting design should upgrade the lighting fixtures and the controls together for maximum energy savings and improved lighting for occupants.

ECM 4: Install Occupancy Sensor Lighting Controls

Install occupancy sensors to control lighting fixtures in areas that are frequently unoccupied, even for short periods. For most spaces, we recommend that lighting controls use dual technology sensors, which reduce the possibility of lights turning off unexpectedly.

Occupancy sensors detect occupancy using ultrasonic and/or infrared sensors. When an occupant enters the space, the lighting fixtures switch to full lighting levels. Most occupancy sensor lighting controls allow users to manually turn fixtures on/off as needed. Some controls can also provide dimming options.

Occupancy sensors can be mounted on the wall at existing switch locations, on the ceiling, or in remote locations. In general, wall switch replacement sensors are best suited to single occupant offices and other small rooms. Ceiling-mounted or remote-mounted sensors are used in large spaces, locations without local switching, and where wall switches are not in the line-of-sight of the main work area.

This measure provides energy savings by reducing the lighting operating hours.

Affected building areas: offices, conference rooms, classrooms, gymnasium, library, restrooms, and storage rooms.





4.3 Motors

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)		Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)				CO ₂ e Emissions Reduction (lbs)
Motor l	Jpgrades	5,469	1.0	0	\$617	\$4,495	\$0	\$4,495	7.3	5,507
ECM 5	Premium Efficiency Motors	5,469	1.0	0	\$617	\$4,495	\$0	\$4,495	7.3	5,507

ECM 5: Premium Efficiency Motors

Replace standard efficiency motors with IHP 2014 efficiency motors. This evaluation assumes that existing motors will be replaced with motors of equivalent size and type. In some cases, additional savings may be possible by downsizing motors to better meet the motor's current load requirements.

Affected motors:

Location	Area(s)/System(s) Served	Motor Quantity	Motor Application	HP Per Motor	Additional Motor Description
Upper boiler room	HWP-1	1	Heating Hot Water Pump	20.0	
Upper boiler room	HWP-2	1	Heating Hot Water Pump	20.0	

Savings are based on the difference between baseline and proposed efficiencies and the assumed annual operating hours. The base case motor energy consumption is estimated using the efficiencies found on nameplates or estimated based on the age of the motor and our best estimates of motor run hours. Efficiencies of proposed motor upgrades are obtained from the current *New Jersey's Clean Energy Program Protocols to Measure Resource Savings*.





4.4 Variable Frequency Drives (VFD)

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Variable	e Frequency Drive (VFD) Measures	276,092	66.7	0	\$31,163	\$156,251	\$18,840	\$137,411	4.4	278,023
ECM 6	Install VFDs on Constant Volume (CV) Fans	246,205	57.4	0	\$27,790	\$134,561	\$15,840	\$118,721	4.3	247,926
I ECM 7	Install VFDs on Chilled Water Pumps	29,888	9.3	0	\$3,374	\$21,690	\$3,000	\$18,690	5.5	30,097

Variable frequency drives (VFDs) control motors for fans, pumps, and process equipment based on the actual output required of the driven equipment. Energy savings result from more efficient control of motor energy usage when equipment operates at partial load. The magnitude of energy savings depends on the estimated amount of time that the motor would operate at partial load. For equipment with proposed VFDs, we have included replacing the controlled motor with a new motor to conservatively account for the cost of an inverter duty rated motor.

Premium efficiency motors have been proposed to be installed only in conjunction with proposed VFDs motor measures. Non-inverter duty rated motors will need to be replaced when the VFD measure is implemented.

ECM 6: Install VFDs on Constant Volume (CV) Fans

Install VFDs to control constant volume fan motor speeds. This converts a constant-volume, single-zone air handling system into a variable-air-volume (VAV) system. A separate VFD is usually required to control the return fan motor or dedicated exhaust fan motor, if the air handler has one.

Zone thermostats signal the VFD to adjust fan speed to maintain the appropriate temperature in the zone while maintaining a constant supply air temperature.

For air handlers with direct expansion (DX) cooling systems, the minimum air flow across the cooling coil required to prevent the coil from freezing must be determined during the final project design. The control system programming should maintain the minimum air flow whenever the compressor is operating. Prior to implementation, verify minimum fan speed in cooling mode with the manufacturer. Note that savings will vary depending on the operating characteristics of each AHU.

Energy savings result from reducing the fan speed (and power) when conditions allow for reduced air flow.

Affected air handlers: AHU 1-17.





ECM 7: Install VFDs on Chilled Water Pumps

Install VFDs to control chilled water pumps. Two-way valves must serve the chilled water coils being served and the chilled water loop must have a differential pressure sensor installed. If three-way valves or a bypass leg are used in the chilled water distribution, they will need to be modified when this measure is implemented. As the chilled water valves close, the differential pressure increases, and the VFD modulates the pump speed to maintain a differential pressure setpoint.

For systems with variable chilled water flow through the chiller, the minimum flow to prevent the chiller from tripping off will need to be determined during the final project design. The control system should be programmed to maintain the minimum flow through the chiller and to prevent pump cavitation.

Energy savings result from reducing the pump motor speed (and power) as chilled water valves close. The magnitude of energy savings is based on the estimated amount of time that the system operates at reduced loads.

Affected pumps: two 25hp chilled water pumps

4.5 Electric Unitary HVAC

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)		Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Electric	Unitary HVAC Measures	3,595	1.6	0	\$406	\$21,978	\$498	\$21,480	52.9	3,620
ECM 8	Install High Efficiency Air Conditioning Units	1,685	0.8	0	\$190	\$9,341	\$69	\$9,272	48.8	1,697
ECM 9	Install High Efficiency PTAC/PTHP	1,911	0.9	0	\$216	\$12,638	\$429	\$12,209	56.6	1,924

Replacing the unitary HVAC units has a long payback period and may not be justifiable based simply on energy considerations. However, most of the units at the High School are nearing or have reached the end of their normal useful life. Typically, the marginal cost of purchasing a high-efficiency unit can be justified by the marginal savings from the improved efficiency. When the split AC and the PTAC units are eventually replaced, consider purchasing equipment that exceeds the minimum efficiency required by building codes.

ECM 8: Install High-Efficiency Air Conditioning Units

Replace standard efficiency packaged air conditioning units with high-efficiency packaged air conditioning units. The magnitude of energy savings for this measure depends on the relative efficiency of the older unit versus the new high-efficiency unit, average cooling load, and estimated annual operating hours.

ECM 9: Install High-Efficiency PTAC/PTHP

Replace packaged terminal air conditioners and heat pumps (PTAC and PTHP) with high-efficiency units. A higher EER or SEER rating indicates a more efficient cooling system and a higher HSPF rating indicates more efficient heating mode. The magnitude of energy savings for this measure depends on the relative efficiency of the older unit versus the new high-efficiency unit, average heating and cooling loads, and estimated annual operating hours.





4.6 Electric Chillers

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*			CO ₂ e Emissions Reduction (lbs)
Electric	Chiller Replacement	140,608	90.6	0	\$15,871	\$932,906	\$82,800	\$850,106	53.6	141,591
ECM 10	Install High Efficiency Chillers	140,608	90.6	0	\$15,871	\$932,906	\$82,800	\$850,106	53.6	141,591

ECM 10: Install High-Efficiency Chillers

Replace older inefficient electric chillers with new high-efficiency chillers. The type of chiller to be installed depends on the magnitude of the cooling load and variability of the cooling load profile, for example:

- Positive displacement chillers are usually under 600 tons of cooling capacity and centrifugal chillers generally start at 150 tons of cooling capacity.
- Constant speed chillers should be used to meet cooling loads with little or no variation while variable speed chillers are more efficient for variable cooling load profiles.
- Water cooled chillers are more efficient than air cooled chillers but require cooling towers and additional pumps to circulate the cooling water.
- In any given size range, variable speed chillers tend to have better partial load efficiency, but lower full load efficiency, than constant speed chillers.

Energy savings result from the improvement in chiller efficiency and matching the right type of chiller to the cooling load. The energy savings are calculated based on the cooling capacity of the new chiller, improvement in efficiency compared with the base case equipment, cooling load profile, and estimated annual operating hours of the chiller before and after the upgrade.

For the purposes of this analysis, we evaluated the replacement of chillers on a one-for-one basis with equipment of the same capacity. We recommend that you work with your design team to select chillers that are sized appropriately for the cooling load at the High School. In some cases, the plant energy use can be reduced by selecting multiple chillers that match the facility load profile rather than one or two large chillers. This can also improve the chiller plant reliability through increased redundancy. Energy savings are maximized by proper selection of new equipment based on the cooling load profile.

Replacing the chiller has a long payback based on energy savings and may not be justifiable based simply on energy considerations. However, the chiller has reached the end of its normal useful life. Typically, the marginal cost of purchasing a high-efficiency chiller can be justified by the marginal savings from the improved efficiency. When the chillers are eventually replaced, consider purchasing equipment that exceeds the minimum efficiency required by building codes.





4.7 Gas-Fired Heating

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*		1	CO ₂ e Emissions Reduction (lbs)
Gas He	ating (HVAC/Process) Replacement	0	0.0	26	\$259	\$11,401	\$400	\$11,001	42.5	3,047
ECM 11	Install High Efficiency Furnaces	0	0.0	22	\$220	\$9,063	\$400	\$8,663	39.4	2,588
ECM 12	Install High Efficiency Unit Heaters	0	0.0	4	\$39	\$2,338	\$0	\$2,338	60.0	458

ECM 11: Install High-Efficiency Furnaces

Replace standard efficiency furnaces with condensing furnaces. Improved combustion technology and heat exchanger design optimize heat recovery from the combustion gases, which can significantly improve furnace efficiency. Savings result from improved system efficiency.

Note: These units produce acidic condensate that requires proper drainage.

ECM 12: Install High-Efficiency Unit Heaters

Replace existing standard gas-fired unit heaters with high-efficiency gas-fired unit heaters. Improved combustion technology and heat exchanger design optimize the heat recovery from the combustion gases, which can significantly improve unit heater efficiency. Savings result from improved system efficiency.

Note: These units produce acidic condensate that requires proper drainage.





4.8 Domestic Water Heating

#	Energy Conservation Measure		Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)				CO₂e Emissions Reduction (lbs)
Domest	tic Water Heating Upgrade	0	0.0	57	\$567	\$143	\$0	\$143	0.3	6,666
ECM 13	Install Low-Flow DHW Devices	0	0.0	57	\$567	\$143	\$0	\$143	0.3	6,666

ECM 13: Install Low-Flow DHW Devices

Install low-flow devices to reduce overall hot water demand. The following low-flow devices are recommended to reduce hot water usage:

Device	Flow Rate
Faucet aerators (lavatory)	0.5 gpm
Faucet aerator (kitchen)	1.5 gpm
Showerhead	2.0 gpm
Pre-rinse spray valve (kitchen)	1.28 gpm

Low-flow devices reduce the overall water flow from the fixture while still providing adequate pressure for washing. Additional cost savings may result from reduced water usage.

4.9 Food Service & Refrigeration Measures

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)		Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Food Se	ervice & Refrigeration Measures	8,059	0.9	0	\$910	\$1,150	\$250	\$900	1.0	8,116
ECM 14	Vending Machine Control	8,059	0.9	0	\$910	\$1,150	\$250	\$900	1.0	8,116

ECM 14: Vending Machine Control

Vending machines operate continuously, even during unoccupied hours. Install occupancy sensor controls to reduce energy use. These controls power down vending machines when the vending machine area has been vacant for some time, and power up the machines at necessary regular intervals or when the surrounding area is occupied. Energy savings are dependent on the vending machine and activity level in the area surrounding the machines.





5 ENERGY EFFICIENT BEST PRACTICES

A whole building maintenance plan will extend equipment life; improve occupant comfort, health, and safety; and reduce energy and maintenance costs. You may already be doing some of these things— see our list below for potential additions to your maintenance plan. Be sure to consult with qualified equipment specialists for details on proper maintenance and system operation.

Energy Tracking with ENERGY STAR® Portfolio Manager®



You've heard it before - you can't manage what you don't measure. ENERGY STAR® Portfolio Manager® is an online tool that you can use to measure and track energy and water consumption, as well as greenhouse gas emissions⁴. Your account has already been established. Now you can continue to keep tabs on your energy performance every month.

Lighting Controls

As part of a lighting maintenance schedule, test lighting controls to ensure proper functioning. For occupancy sensors, this requires triggering the sensor and verifying that the sensor's timer settings are correct. For daylight and photocell sensors, maintenance involves cleaning sensor lenses and confirming that setpoints and sensitivity are configured properly.

Motor Short Cycling Reduction

Frequent stopping and starting of motors places substantial stress on rotors and other parts. This leads to wear and tear, lower efficiency, and higher maintenance costs. Adjust the load on the motor to limit the amount of unnecessary stopping and starting to improve motor performance.

Thermostat Schedules and Temperature Resets



Use thermostat setback temperatures and schedules to reduce heating and cooling energy use during periods of low or no occupancy. Thermostats should be programmed for a setback of 5-10°F during low occupancy hours (reduce heating setpoints and increase cooling setpoints). Cooling load can be reduced by increasing the High School's occupied setpoint temperature. In general, during the cooling season, thermostats should be set as high as possible without sacrificing occupant comfort.

AC System Evaporator/Condenser Coil Cleaning

Dirty evaporator and condenser coils restrict air flow and restrict heat transfer. This increases the loads on the evaporator and condenser fan, and decreases overall cooling system performance. Keeping the coils clean allows the fans and cooling system to operate more efficiently.

https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/use-portfolio-manager.





HVAC Filter Cleaning and Replacement

Air filters should be checked regularly (often monthly) and cleaned or replaced when appropriate. Air filters reduce indoor air pollution, increase occupant comfort, and help keep equipment operating efficiently. If the building has a building management system, consider installing a differential pressure switch across filters to send an alarm about premature fouling or overdue filter replacement. Over time, filters become less and less effective as particulate buildup increases. Dirty filters also restrict air flow through the air conditioning or heat pump system, which increases the load on the distribution fans.

Boiler Maintenance

Many boiler problems develop slowly over time, so regular inspection and maintenance is essential to keeping the heating system running efficiently and preventing expensive repairs. Annual tune-ups should include a combustion analysis to analyze the exhaust from the boilers and to ensure the boiler is operating safely. Boilers should be cleaned according to the manufacturer's instructions to remove soot and scale from the water side or fire side of the boiler.

Furnace Maintenance

Preventative maintenance can extend the life of the system, maintain energy efficiency, and ensure safe operation. Following the manufacturer's instructions, a yearly tune-up should: check for gas / carbon monoxide leaks; change the air and fuel filters; check components for cracks, corrosion, dirt, or debris build-up; ensure the ignition system is working properly; test and adjust operation and safety controls; inspect electrical connections; and lubricate motors and bearings.

Water Heater Maintenance


Preventative maintenance can extend the life of the system, maintain energy efficiency, and ensure safe operation. At least once a year, follow manufacturer instructions to drain a few gallons out of the water heater using the drain valve. If there is a lot of sediment or debris, then a full flush is recommended. Turn the temperature down and then completely drain the tank. Annual checks should include checks for:

- Leaks or heavy corrosion on the pipes and valves.
- Corrosion or wear on the gas line and on the piping. If you noticed any black residue, soot, or charred metal, this is a sign you may be having combustion issues and you should have the unit serviced by a professional.
- For electric water heaters, look for signs of leaking such as rust streaks or residue around the upper and lower panels covering the electrical components on the tank.
- For water heaters more than three years old, have a technician inspect the sacrificial anode annually.





Plug Load Controls



Reducing plug loads is a common way to decrease your electrical use. Limiting the energy use of plug loads can include increasing occupant awareness, removing under-used equipment, installing hardware controls, and using software controls. Consider enabling the most aggressive power settings on existing devices or install load sensing or occupancy sensing (advanced) power strips⁵. Your local utility may offer incentives or rebates for this equipment.

Water Conservation



Installing dual flush or low-flow toilets and low-flow/waterless urinals are ways to reduce water use. The EPA WaterSense[™] ratings for urinals is 0.5 gallons per flush (gpf) and for flush valve toilets is 1.28 gpf (this is lower than the current 1.6 gpf federal standard).

For more information regarding water conservation go to the EPA's WaterSense™ website⁶ or download a copy of EPA's "WaterSense™ at Work: Best Management

Practices for Commercial and Institutional Facilities"⁷ to get ideas for creating a water management plan and best practices for a wide range of water using systems.

Water conservation devices that do not reduce hot water consumption will not provide energy savings at the site level, but they may significantly affect your water and sewer usage costs. Any reduction in water use does however ultimately reduce grid-level electricity use since a significant amount of electricity is used to deliver water from reservoirs to end users.

If the facility has detached buildings with a master water meter for the entire campus, check for unnatural wet areas in the lawn or water seeping in the foundation at water pipe penetrations through the foundation. Periodically check overnight meter readings when the High School is unoccupied, and there is no other scheduled water usage.

Manage irrigation systems to use water more effectively outside the building. Adjust spray patterns so that water lands on intended lawns and plantings and not on pavement and walls. Consider installing an evapotranspiration irrigation controller that will prevent over-watering.

Procurement Strategies

Purchasing efficient products reduces energy costs without compromising quality. Consider modifying your procurement policies and language to require ENERGY STAR® or WaterSense™ products where available.

⁵ For additional information refer to "Assessing and Reducing Plug and Process Loads in Office Buildings" http://www.nrel.gov/docs/fy13osti/54175.pdf, or "Plug Load Best Practices Guide" http://www.advancedbuildings.net/plug-load-best-practices-guide-offices.

⁶ https://www.epa.gov/watersense

⁷ https://www.epa.gov/watersense/watersense-work-0





6 ON-SITE GENERATION

You don't have to look far in New Jersey to see one of the thousands of solar electric systems providing clean power to homes, businesses, schools, and government buildings. On-site generation includes both renewable (e.g., solar, wind) and non-renewable (e.g., fuel cells) technologies that generate power to meet all or a portion of the High School's electric energy needs. Also referred to as distributed generation, these systems contribute to greenhouse gas (GHG) emission reductions, demand reductions and reduced customer electricity purchases, which results in improved electric grid reliability through better use of transmission and distribution systems.

Preliminary screenings were performed to determine if an on-site generation measure could be a costeffective solution for the High School. Before deciding to install an on-site generation system, we recommend conducting a feasibility study to analyze existing energy profiles, siting, interconnection, and the costs associated with the generation project including interconnection costs, departing load charges, and any additional special facilities charges.





6.1 Solar Photovoltaic

Photovoltaic (PV) panels convert sunlight into electricity. Individual panels are combined into an array that produces direct current (DC) electricity. The DC current is converted to alternating current (AC) through an inverter. The inverter is then connected to the building's electrical distribution system.

A preliminary screening based on the High School's electric demand, size and location of free area, and shading elements shows that the High School has **high** potential for installing additional PV arrays.

The amount of free area, ease of installation, and the lack of shading elements contribute to the high potential. A PV array located on the roof may be feasible. If you are interested in pursuing the installation of PV, we recommend conducting a full feasibility study.

The graphic below displays the results of the PV potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

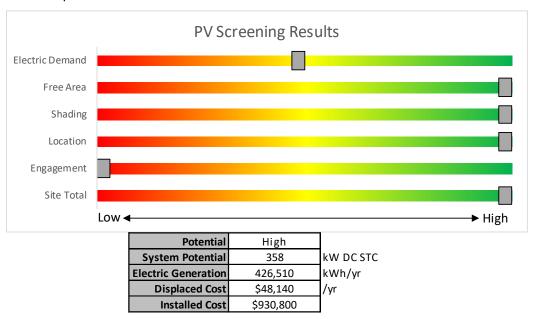


Figure 9 - Photovoltaic Screening

Solar Renewable Energy Certificate (SREC) Registration Program (SRP)

Rebates are not available for solar projects, but owners of solar projects MUST register their projects in the SREC Registration Program before starting construction. Once your PV system is up and running, you periodically earn credits, which can then be sold on the open market for up to 15 years.

If you are considering installing solar photovoltaics on your building, visit www.njcleanenergy.com/srec for more information about the SREC Registration Program.

Get more information about solar power in New Jersey or find a qualified solar installer who can help you decide if solar is right for your building:

- Basic Info on Solar PV in New Jersey: www.njcleanenergy.com/whysolar
- **New Jersey Solar Market FAQs**: <u>www.njcleanenergy.com/renewable-energy/program-updates-and-background-information/solar-transition/solar-market-faqs</u>
- Approved Solar Installers in the New Jersey Market: www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/?id=60&start=1





6.2 Combined Heat and Power

Combined heat and power (CHP) generate electricity at the High School and puts waste heat energy to good use. Common types of CHP systems are reciprocating engines, microturbines, fuel cells, backpressure steam turbines, and (at large facilities) gas turbines.

CHP systems typically produce a portion of the electric power used on-site, with the balance of electric power needs supplied by the local utility company. The heat is used to supplement (or replace) existing boilers and provide space heating and/or domestic hot water heating. Waste heat can also be routed through absorption chillers for space cooling.

The key criteria used for screening is the amount of time that the CHP system would operate at full load and the facility's ability to use the recovered heat. Facilities with a continuous need for large quantities of waste heat are the best candidates for CHP.

A preliminary screening based on heating and electrical demand, siting, and interconnection shows that the High School has **no** potential for installing a cost-effective CHP system.

Low or infrequent thermal load, and lack of space for siting the equipment are the most significant factors contributing to the lack of CHP potential.

The graphic below displays the results of the CHP potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

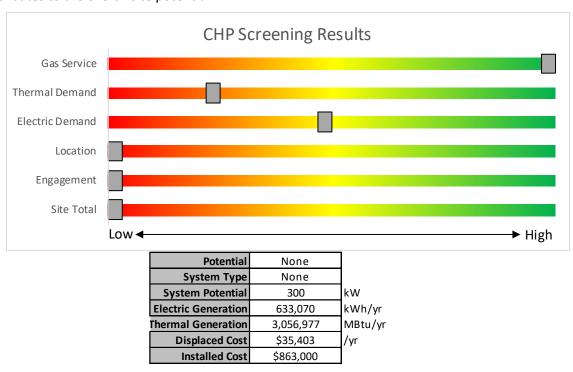


Figure 10 - Combined Heat and Power Screening

Find a qualified firm that specializes in commercial CHP cost assessment and installation: http://www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved vendorsearch/.





7 Project Funding and Incentives

Ready to improve your building's performance? Pick the program that works best for you. Incentive programs that may apply to the High School are identified in the Executive Summary. This section provides an overview of currently available New Jersey's Clean Energy Programs.

	SmartStart Flexibility to install at your own pace	Direct Install Turnkey installation	Pay for Performance Whole building upgrades
Who should use it?	Buildings installing individual measures or small group of measures.	Small to mid-size facilities that can bundle multiple measures together.	Mid to large size facilities looking to implement as many measures as possible at one time.
		Average peak demand should be below 200 kW.	Peak demand should be over 200 kW.
		Not suitable for significant building shell issues.	
How does it work?	Use in-house staff or your preferred contractor.	Pre-approved contractors pass savings along to you via reduced material and labor costs.	Whole-building approach to energy upgrades designed to reduce energy use by at least 15%. The more you save, the higher the incentives.
What are the Incentives?	Fixed incentives for specific energy efficiency measures.	Incentives pay up to 70% of eligible costs, up to \$125,000 per project.	Up to 25% of installation cost, calculated based on level of energy savings per
		You pay the remaining 30% directly to the contractor.	square foot.
How do I participate?	Submit an application for the specific equipment to be installed.	Contact a participating contractor in your region.	Contact a pre-qualified Partner to develop your Energy Reduction Plan and set your energy savings targets.

Take the next step by visiting **www.njcleanenergy.com** for program details, applications, and to contact a qualified contractor.





7.1 SmartStart



SmartStart offers incentives for installing prescriptive and custom energy efficiency measures at the High School. This program provides an effective mechanism for securing incentives for energy efficiency measures installed individually or as part of a package of energy upgrades. This program serves most common equipment types and sizes.

SmartStart routinely adds, removes, or modifies incentives from year-to-year for various energy efficient equipment based on market trends and new technologies.

Equipment with Prescriptive Incentives Currently Available:

Electric Chillers
Electric Unitary HVAC
Gas Cooling
Gas Heating
Gas Water Heating
Ground Source Heat Pumps
Lighting

Lighting Controls
Refrigeration Doors
Refrigeration Controls
Refrigerator/Freezer Motors
Food Service Equipment
Variable Frequency Drives

Incentives

The SmartStart Prescriptive program provides fixed incentives for specific energy efficiency measures. Prescriptive incentives vary by equipment type.

SmartStart Custom provides incentives for more unique or specialized technologies or systems that are not addressed through prescriptive incentives. Custom incentives are calculated at \$0.16/kWh and \$1.60/therm based on estimated annual savings. Incentives are capped at 50% of the total installed incremental project cost, or a project cost buy down to a one-year payback (whichever is less). Program incentives are capped at \$500,000 per electric account and \$500,000 per natural gas account, per fiscal year.

How to Participate

Submit an application for the specific equipment to be installed. Many applications are designed as rebates, although others require application approval prior to installation. You can work with your preferred contractor or use internal staff to install measures.

Visit <u>www.njcleanenergy.com/SSB</u> for a detailed program description, instructions for applying, and applications.





7.2 Direct Install



Direct Install is a turnkey program available to existing small to medium-sized facilities with an average peak electric demand that does not exceed 200 kW over the recent 12-month period. You work directly with a preapproved contractor who will perform a free energy assessment at the High School, identify specific eligible measures, and provide a clear scope of work for

installation of selected measures. Energy efficiency measures may include lighting and lighting controls, refrigeration, HVAC, motors, variable speed drives, and controls.

Incentives

The program pays up to 70% of the total installed cost of eligible measures, up to \$125,000 per project. Each entity is limited to incentives up to \$250,000 per fiscal year.

How to Participate

To participate in Direct Install, you will need to contact the participating contractor assigned to the region of the state where the High School is located. A complete list of Direct Install program partners is provided on the Direct Install website linked below. The contractor will be paid the measure incentives directly by the program, which will pass on to you in the form of reduced material and implementation costs. This means up to 70% of eligible costs are covered by the program, subject to program caps and eligibility, while the remaining 30% of the cost is paid to the contractor by the customer.

Detailed program descriptions and applications can be found at: www.njcleanenergy.com/DI.





7.3 Pay for Performance - Existing Buildings



Pay for Performance works for larger customers with a peak demand over 200 kW. The minimum installed scope of work must include at least two unique measures that results in at least 15% source energy savings, and lighting cannot make up the majority of the savings. P4P is a generally a good option for medium-to-large sized facilities looking to implement as many

measures as possible under a single project to achieve deep energy savings. This program has an added benefit of addressing measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program loan also use this program.

Incentives

Incentives are based on estimated and achieved energy savings ranging from \$0.18-\$0.22/kWh and \$1.80-\$2.50/therm, capped at the lesser of 50% total project cost, or \$1 million per electric account and \$1 million per natural gas account, per fiscal year, not to exceed \$2 million per project. An incentive of \$0.15/square foot is also available to offset the cost of developing the Energy Reduction Plan (see below) contingent on the project moving forward with measure installation.

How to Participate

Contact one of the pre-approved consultants and contractors ("Partners"). Under direct contract to you, they will help further evaluate the measures identified in this report through development of the energy reduction plan, assist you in implementing selected measures, and verify actual savings one year after the installation. Your Partner will also help you apply for incentives.

Approval of the final scope of work is required by the program prior to installation. Installation can be done by the contractor of your choice (some P4P Partners are also contractors) or by internal staff, but the Partner remains involved throughout construction to ensure compliance with the program requirements.

Detailed program descriptions, instructions for applying, applications and list of Partners can be found at: www.njcleanenergy.com/P4P.





7.4 Combined Heat and Power

The Combined Heat & Power (CHP) program provides incentives for eligible CHP or waste heat to power (WHP) projects. Eligible CHP or WHP projects must achieve an annual system efficiency of at least 65% (lower heating value, or LHV), based on total energy input and total utilized energy output. Mechanical energy may be included in the efficiency evaluation.

Incentives

Eligible Technologies	Size (Installed Rated Capacity) ¹	Incentive (\$/kW)	% of Total Cost Cap per Project ³	\$ Cap per Project ³
Powered by non- renewable or renewable fuel source ⁴	≤500 kW	\$2,000	30-40% ²	\$2 million
Gas Internal Combustion Engine	>500 kW - 1 MW	\$1,000		
Gas Combustion Turbine	> 1 MW - 3 MW	\$550		
Microturbine Fuel Cells with Heat Recovery	>3 MW	\$350	30%	\$3 million
				2200000000
Waste Heat to Power*	<1 MW	\$1,000	30%	\$2 million
Intelligent.	> 1MW	\$500		\$3 million

[&]quot;Waste Heat to Power: Powered by non-renewable fuel source, heat recovery or other mechanical recovery from existing equipment utilizing new electric generation equipment (e.g. steam turbine).

Check the NJCEP website for details on program availability, current incentive levels, and requirements.

How to Participate

You work with a qualified developer or consulting firm to complete the CHP application. Once the application is approved the project can be installed. Information about the CHP program can be found at: www.njcleanenergy.com/CHP.





7.5 Energy Savings Improvement Program

The Energy Savings Improvement Program (ESIP) serves New Jersey's government agencies by financing energy projects. An ESIP is a type of performance contract, whereby school districts, counties, municipalities, housing authorities and other public and state entities enter in to contracts to help finance building energy upgrades. Annual payments are lower than the savings projected from the ECMs, ensuring that ESIP projects are cash flow positive for the life of the contract.

ESIP provides government agencies in New Jersey with a flexible tool to improve and reduce energy usage with minimal expenditure of new financial resources. NJCEP incentive programs described above can also be used to help further reduce the total project cost of eligible measures.

How to Participate

This LGEA report is the first step to participating in ESIP. Next, you will need to select an approach for implementing the desired ECMs:

- (1) Use an energy services company or "ESCO."
- (2) Use independent engineers and other specialists, or your own qualified staff, to provide and manage the requirements of the program through bonds or lease obligations.
- (3) Use a hybrid approach of the two options described above where the ESCO is used for some services and independent engineers, or other specialists or qualified staff, are used to deliver other requirements of the program.

After adopting a resolution with a chosen implementation approach, the development of the energy savings plan (ESP) can begin. The ESP demonstrates that the total project costs of the ECMs are offset by the energy savings over the financing term, not to exceed 15 years. The verified savings will then be used to pay for the financing.

The ESIP approach may not be appropriate for all energy conservation and energy efficiency improvements. Carefully consider all alternatives to develop an approach that best meets your needs. A detailed program descriptions and application can be found at: www.njcleanenergy.com/ESIP.

ESIP is a program delivered directly by the NJBPU and is not an NJCEP incentive program. As mentioned above, you can use NJCEP incentive programs to help further reduce costs when developing the energy savings plan. Refer to the ESIP guidelines at the link above for further information and guidance on next steps.





7.6 SREC Registration Program

The SREC (Solar Renewable Energy Certificate) Registration Program (SRP) is used to register the intent to install solar projects in New Jersey. Rebates are not available for solar projects, but owners of solar projects *must* register their projects prior to the start of construction to establish the project's eligibility to earn SRECs. Registration of the intent to participate in New Jersey's solar marketplace provides market participants with information about the pipeline of anticipated new solar capacity and insight into future SREC pricing.

After the registration is accepted, construction is complete, and final paperwork has been submitted and is deemed complete, the project is issued a New Jersey certification number, which enables it to generate New Jersey SRECs. SREC's are generated once the solar project has been authorized to be energized by the Electric Distribution Company (EDC).

Each time a solar installation generates 1,000 kilowatt-hours (kWh) of electricity, an SREC is earned. Solar project owners report the energy production to the SREC Tracking System. This reporting allows SREC's to be placed in the customer's electronic account. SRECs can then be sold on the SREC Tracking System, providing revenue for the first 15 years of the project's life.

Electricity suppliers, the primary purchasers of SRECs, are required to pay a Solar Alternative Compliance Payment (SACP) if they do not meet the requirements of New Jersey's Solar Renewable Portfolio Standard. Purchasing SRECs can help them meet those requirements. As SRECs are traded in a competitive market, the price may vary significantly. The actual price of an SREC during a trading period fluctuates depending on supply and demand.

Information about the SRP can be found at: www.njcleanenergy.com/srec.





8 ENERGY PURCHASING AND PROCUREMENT STRATEGIES

8.1 Retail Electric Supply Options

Energy deregulation in New Jersey has increased energy buyers' options by separating the function of electricity distribution from that of electricity supply. So, though you may choose a different company from which to buy your electric power, responsibility for the High School's interconnection to the grid and repair to local power distribution will still reside with the traditional utility company serving your region.

If your facility is not purchasing electricity from a third-party supplier, consider shopping for a reduced rate from third-party electric suppliers. If your facility already buys electricity from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party electric suppliers is available at the NJBPU website⁸.

8.2 Retail Natural Gas Supply Options

The natural gas market in New Jersey is also deregulated. Most customers that remain with the utility for natural gas service pay rates that are market-based and that fluctuate monthly. The utility provides basic gas supply service (BGSS) to customers who choose not to buy from a third-party supplier for natural gas commodity.

A customer's decision about whether to buy natural gas from a retail supplier typically depends on whether a customer prefers budget certainty and/or longer-term rate stability. Customers can secure longer-term fixed prices by signing up for service through a third-party retail natural gas supplier. Many larger natural gas customers may seek the assistance of a professional consultant to assist in their procurement process.

If your facility does not already purchase natural gas from a third-party supplier, consider shopping for a reduced rate from third-party natural gas suppliers. If your facility already purchases natural gas from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party natural gas suppliers is available at the NJBPU website⁹.

⁸ www.state.nj.us/bpu/commercial/shopping.html

⁹ www.state.nj.us/bpu/commercial/shopping.html





APPENDIX A: EQUIPMENT INVENTORY & RECOMMENDATIONS

Lighting Inventory & Recommendations

Ligitung III		ory & Recommend g Conditions	ations	2			Dros	osed Conditio	ns _						En oray-li	nnact & E	inancial A	nalysis —			
Location	Fixture Quantit y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Big chiller	3	Linear Fluorescent - T12: 4' T12 (40W) - 2L	Wall Switch	S	88	800	2	Relamp & Reballast	No	3	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	800	0.1	156	0	\$17	\$206	\$30	10.2
Boiler room	16	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	800	3	Relamp	No	16	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	800	0.4	465	0	\$51	\$584	\$160	8.2
Elevator	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	None	S	62	4,400	3	Relamp	No	3	LED - Linear Tubes: (2) 4' Lamps	None	29	4,400	0.1	479	0	\$53	\$110	\$30	1.5
S16 storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	400	3	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	400	0.0	29	0	\$3	\$73	\$20	16.5
C202 Science lab	14	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	14	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.5	2,314	0	\$256	\$767	\$210	2.2
Science prep	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.1	496	0	\$55	\$164	\$45	2.2
C204 Science room	14	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	14	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.5	2,314	0	\$256	\$767	\$210	2.2
CR C203	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR C206	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR C205	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR C207	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR C208	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
S17 Storage	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	400	3	Relamp	No	4	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	400	0.1	58	0	\$6	\$146	\$40	16.5
CR C209	8	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	8	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.3	1,322	0	\$147	\$438	\$120	2.2
M5 Mech Room	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	800	3	Relamp	No	8	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	800	0.2	232	0	\$26	\$292	\$80	8.2
Men 2nd floor	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	S	29	3,036		None	No	3	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Janitor closet	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	800	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	800	0.0	29	0	\$3	\$37	\$10	8.2
Staff restroom	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Occupanc y Sensor	S	33	3,036	3	Relamp	No	1	LED - Linear Tubes: (2) 2' Lamps	Occupano y Sensor	17	3,036	0.0	53	0	\$6	\$33	\$6	4.5
CR C209	8	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	8	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.3	1,322	0	\$147	\$438	\$120	2.2
Women 2nd floor	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	S	29	3,036		None	No	3	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
C hall 2nd floor	14	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	S	32	3,036	3	Relamp	No	14	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.1	449	0	\$50	\$353	\$14	6.8
C hall 2nd floor	12	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	S	29	3,036		None	No	12	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
C hall 2nd floor	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
C hall 2nd floor	5	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	S	29	3,036		None	No	5	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
C hall 2nd floor	1	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	S	32	3,036	3	Relamp	No	1	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.0	32	0	\$4	\$25	\$1	6.8





	Existin	g Conditions					Prop	osed Conditio	ns						Energy Ir	npact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
CR C201	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR C210	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
C hall 2nd floor	9	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	S	29	3,036		None	No	9	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
C hall 2nd floor	1	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	S	32	3,036	3	Relamp	No	1	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.0	32	0	\$4	\$25	\$1	6.8
Chall 2nd floor	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
CR B201	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR B202	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
Storage	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	800	3, 4	Relamp	Yes	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	552	0.1	166	0	\$18	\$280	\$45	12.8
Women 2nd floor	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	496	0	\$55	\$164	\$45	2.2
Staff restroom	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	4,400	3	Relamp	No	1	LED - Linear Tubes: (2) 2' Lamps	Wall Switch	17	4,400	0.0	77	0	\$9	\$33	\$6	3.1
JC 4 Janitor closet	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	800	3	Relamp	No	1	LED - Linear Tubes: (2) 2' Lamps	Wall Switch	17	800	0.0	14	0	\$2	\$33	\$6	17.0
Men 2nd floor	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	s	93	3,036	3	Relamp	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	496	0	\$55	\$164	\$45	2.2
CR B203	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR B204	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR B205	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR B207	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR B208	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR B209	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR B210 Physics	15	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	15	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.5	2,480	-1	\$275	\$822	\$225	2.2
CR B206	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
B210 Prep	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	4,400	3, 4	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	610	0	\$68	\$226	\$50	2.6
B212 Physics	15	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	15	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.5	2,480	-1	\$275	\$822	\$225	2.2
B213 Chemistry	15	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	15	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.5	2,480	-1	\$275	\$822	\$225	2.2
B 211A Prep	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	4,400	3, 4	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	610	0	\$68	\$226	\$50	2.6
B211 Chemistry	15	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	15	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.5	2,480	-1	\$275	\$822	\$225	2.2





	Existin	g Conditions					Prop	osed Conditio	ns						Energy li	npact & F	inancial A	nalysis			
Location	Fixture Quantit y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
B hall 2nd floor	18	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	S	29	3,036		None	No	18	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
B hall 2nd floor	19	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	S	32	3,036	3	Relamp	No	19	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.1	609	0	\$67	\$480	\$19	6.8
B hall 2nd floor	5	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	5	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
B hall 2nd floor	1	LED Lamps: (2) 5W Plug-In Lamps	High/Low Control	S	10	3,036		None	No	1	LED Lamps: (2) 5W Plug-In Lamps	High/Low Control	10	3,036	0.0	0	0	\$0	\$0	\$0	0.0
CR A214	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
Data Room 5	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	3,036	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.0	110	0	\$12	\$37	\$10	2.2
EC-2 Electric closet	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	400	3	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	400	0.0	29	0	\$3	\$73	\$20	16.5
CR A211	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	s	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR A212	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR A213	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR A214	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR A208	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
S15 storage	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	800	3, 4	Relamp	Yes	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	552	0.1	166	0	\$18	\$280	\$45	12.8
CR A209	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR A207	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR A205A	8	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	8	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.3	1,322	0	\$147	\$438	\$120	2.2
CR A205	8	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	s	93	3,036	3	Relamp	No	8	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.3	1,322	0	\$147	\$438	\$120	2.2
Girls 2nd floor	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	496	0	\$55	\$164	\$45	2.2
Girls 2nd floor	1	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	s	32	3,036	3	Relamp	No	1	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.0	32	0	\$4	\$25	\$1	6.8
Staff restroom	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	4,400	3	Relamp	No	1	LED - Linear Tubes: (2) 2' Lamps	Wall Switch	17	4,400	0.0	77	0	\$9	\$33	\$6	3.1
JC3 closet	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	400	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	400	0.0	15	0	\$2	\$37	\$10	16.5
CR A203	8	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	8	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.3	1,322	0	\$147	\$438	\$120	2.2
Boys 2nd floor	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	496	0	\$55	\$164	\$45	2.2
Boys 2nd floor	1	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	S	32	3,036	3	Relamp	No	1	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.0	32	0	\$4	\$25	\$1	6.8
CR A204	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	3,036	3	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.1	661	0	\$73	\$219	\$60	2.2





	Existing	g Conditions					Prop	osed Conditio	ns						Energy Ir	npact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
CR A201	9	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	9	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.3	1,488	0	\$165	\$493	\$135	2.2
CR A202	4	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	4	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	661	0	\$73	\$219	\$60	2.2
CR A200 Teachers lounge	6	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	6	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.2	992	0	\$110	\$329	\$90	2.2
S11 Storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	s	93	400	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	400	0.1	44	0	\$5	\$110	\$30	16.5
A Hall 2nd floor	19	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	S	29	3,036		None	No	19	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
A Hall 2nd floor	15	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	S	32	3,036	3	Relamp	No	15	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.1	481	0	\$53	\$379	\$15	6.8
A Hall 2nd floor	4	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	4	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
CR C101	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR C102 Science lab	14	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	14	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.5	2,314	0	\$256	\$767	\$210	2.2
Science prep	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	s	93	3,036	3	Relamp	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	496	0	\$55	\$164	\$45	2.2
CR C104	14	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	14	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.5	2,314	0	\$256	\$767	\$210	2.2
CR C103	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR C106	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR C105	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR C107	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR C108	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
S14 Storage	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	400	3	Relamp	No	4	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	400	0.1	58	0	\$6	\$146	\$40	16.5
M4 Mech room	9	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	800	3	Relamp	No	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	800	0.2	261	0	\$29	\$329	\$90	8.2
CR C109	8	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	8	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.3	1,322	0	\$147	\$438	\$120	2.2
Men 1st floor	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	3,036	3	Relamp	No	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Men 1st floor	1	Compact Fluorescent: 4 pin - 1 lamp	Occupanc y Sensor	S	32	3,036	3	Relamp	No	1	LED Lamps: 4 pin - 1 lamps	Occupanc y Sensor	22	3,036	0.0	32	0	\$4	\$25	\$1	6.8
Janitor closet	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	400	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	400	0.0	15	0	\$2	\$37	\$10	16.5
Toilet staff	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Occupanc y Sensor	S	33	3,036	3	Relamp	No	1	LED - Linear Tubes: (2) 2' Lamps	Occupanc y Sensor	17	3,036	0.0	53	0	\$6	\$33	\$6	4.5
Women 1st floor	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	3,036	3	Relamp	No	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Women 1st floor	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	3,036	3	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.0	220	0	\$24	\$73	\$20	2.2





	Existing	g Conditions					Prop	osed Conditio	ns						Energy Ir	npact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Women 1st floor	1	Compact Fluorescent: 4 pin - 1 lamp	Occupanc y Sensor	s	32	3,036	3	Relamp	No	1	LED Lamps: 4 pin - 1 lamps	Occupanc y Sensor	22	3,036	0.0	32	0	\$4	\$25	\$1	6.8
CR C109A	8	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	8	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.3	1,322	0	\$147	\$438	\$120	2.2
CR C110	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
8 Vestibule	1	Compact Fluorescent: 4 pin - 1 lamp	Wall Switch	S	32	4,400	3	Relamp	No	1	LED Lamps: 4 pin - 1 lamps	Wall Switch	22	4,400	0.0	46	0	\$5	\$25	\$1	4.7
C Hall 1st floor	26	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	S	29	3,036		None	No	26	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
C Hall 1st floor	15	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	s	32	3,036	3	Relamp	No	15	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.1	481	0	\$53	\$379	\$15	6.8
C Hall 1st floor	7	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	7	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
6 Vestibule	1	Compact Fluorescent: 4 pin - 1 lamp	Wall Switch	S	32	4,400	3	Relamp	No	1	LED Lamps: 4 pin - 1 lamps	Wall Switch	22	4,400	0.0	46	0	\$5	\$25	\$1	4.7
TWR 1 Lounge	9	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	9	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.3	1,488	0	\$165	\$493	\$135	2.2
TWR 1 Lounge	3	Compact Fluorescent: 4 pin - 1 lamp	Occupanc y Sensor	S	32	3,036	3	Relamp	No	3	LED Lamps: 4 pin - 1 lamps	Occupanc y Sensor	22	3,036	0.0	96	0	\$11	\$76	\$3	6.8
CR B101	8	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	8	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.3	1,322	0	\$147	\$438	\$120	2.2
CR B101A	8	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	8	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.3	1,322	0	\$147	\$438	\$120	2.2
Women 1st floor	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	s	93	3,036	3	Relamp	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	496	0	\$55	\$164	\$45	2.2
Women 1st floor	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	3,036	3	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.0	220	0	\$24	\$73	\$20	2.2
Women 1st floor	1	Compact Fluores cent: 4 pin - 1 lamp	Occupanc y Sensor	S	32	3,036	3	Relamp	No	1	LED Lamps: 4 pin - 1 lamps	Occupanc y Sensor	22	3,036	0.0	32	0	\$4	\$25	\$1	6.8
CR B102	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
Staff toilet	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	4,400	3	Relamp	No	1	LED - Linear Tubes: (2) 2' Lamps	Wall Switch	17	4,400	0.0	77	0	\$9	\$33	\$6	3.1
JC2 closet	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	800	3	Relamp	No	1	LED - Linear Tubes: (2) 2' Lamps	Wall Switch	17	800	0.0	14	0	\$2	\$33	\$6	17.0
Men 1st floor	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	496	0	\$55	\$164	\$45	2.2
Men 1st floor	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	5	62	3,036	3	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.0	220	0	\$24	\$73	\$20	2.2
Men 1st floor	1	Compact Fluorescent: 4 pin - 1 lamp	Occupanc y Sensor	S	32	3,036	3	Relamp	No	1	LED Lamps: 4 pin - 1 lamps	Occupanc y Sensor	22	3,036	0.0	32	0	\$4	\$25	\$1	6.8
CR B104	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	5	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR B103 Computer	28	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	3	62	3,036	3	Relamp	No	28	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.7	3,086	-1	\$342	\$1,022	\$280	2.2
B106 studio	20	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	20	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.7	3,306	-1	\$366	\$1,095	\$300	2.2
B106 office	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2





	Existing	g Conditions					Prop	osed Conditio	ons						Energy Ir	npact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
B106 Dark room	4	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	4	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	661	0	\$73	\$219	\$60	2.2
CR C105	16	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	16	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.6	2,645	-1	\$293	\$876	\$240	2.2
B107 Biology	15	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	15	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.5	2,480	-1	\$275	\$822	\$225	2.2
B107 Biology	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
B107A Prep room	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	s	93	3,036	3	Relamp	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	496	0	\$55	\$164	\$45	2.2
B109 Biology	15	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	15	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.5	2,480	-1	\$275	\$822	\$225	2.2
B109 Biology	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
B108 Tech room	34	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	3,036	3	Relamp	No	34	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.8	3,747	-1	\$415	\$1,242	\$340	2.2
B108 A office	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
B110 class	34	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	3,036	3	Relamp	No	34	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.8	3,747	-1	\$415	\$1,242	\$340	2.2
B hall 1st floor	18	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	S	29	3,036		None	No	18	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
B hall 1st floor	20	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	S	32	3,036	3	Relamp	No	20	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.1	641	0	\$71	\$505	\$20	6.8
B hall 1st floor	6	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	6	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
CR A112	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	S	44	3,036		None	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Elevator Machine room	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	800	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	800	0.0	29	0	\$3	\$37	\$10	8.2
EC 1 Elec closet	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	800	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	800	0.0	29	0	\$3	\$37	\$10	8.2
Data room 4	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	4,400	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	4,400	0.0	160	0	\$18	\$37	\$10	1.5
CR A101	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR A108	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR A109	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR A111	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR A106	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR A107	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
CR A105	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
Data room	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	4,400	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	4,400	0.0	160	0	\$18	\$37	\$10	1.5





E-X	xisting	Conditions					Prop	osed Conditio	ns						Energy In	npact & F	inancial A	nalysis			
	ixture uantit y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Women 1st floor	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	496	0	\$55	\$164	\$45	2.2
Women 1st floor	1	Compact Fluorescent: 4 pin - 1 lamp	Occupanc y Sensor	s	32	3,036	3	Relamp	No	1	LED Lamps: 4 pin - 1 lamps	Occupanc y Sens or	22	3,036	0.0	32	0	\$4	\$25	\$1	6.8
CR A103A	16	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	16	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sens or	44	3,036	0.6	2,645	-1	\$293	\$876	\$240	2.2
Men 1st floor	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	496	0	\$55	\$164	\$45	2.2
Men 1st floor	1	lamp	Occupanc y Sensor	S	32	3,036	3	Relamp	No	1	LED Lamps: 4 pin - 1 lamps	Occupanc y Sensor	22	3,036	0.0	32	0	\$4	\$25	\$1	6.8
JC 1 closet	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	800	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	800	0.0	29	0	\$3	\$37	\$10	8.2
Staff restroom	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	4,400	3	Relamp	No	1	LED - Linear Tubes: (2) 2' Lamps	Wall Switch	17	4,400	0.0	77	0	\$9	\$33	\$6	3.1
S3 storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	400	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	400	0.1	44	0	\$5	\$110	\$30	16.5
A101 Art room	16	(32W) - 3L	Occupanc y Sensor	s	93	3,036	3	Relamp	No	16	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.6	2,645	-1	\$293	\$876	\$240	2.2
S1 Storage	2	(32W) - 3L	Occupanc y Sensor	S	93	400	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	400	0.1	44	0	\$5	\$110	\$30	16.5
A101B Kiln	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	4,400	3	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	4,400	0.0	319	0	\$35	\$73	\$20	1.5
A102 Art	28	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	3,036	3	Relamp	No	28	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.7	3,086	-1	\$342	\$1,022	\$280	2.2
S2 storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	400	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	400	0.1	44	0	\$5	\$110	\$30	16.5
A hall 1st floor	20	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	S	29	3,036		None	No	20	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
A hall 1st floor	18	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	S	32	3,036	3	Relamp	No	18	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.1	577	0	\$64	\$454	\$18	6.8
A hall 1st floor	5	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	5	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Stairwell 5	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	High/Low Control	S	62	3,036	3	Relamp	No	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.2	771	0	\$85	\$256	\$70	2.2
Stairwell 5	2	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	S	32	3,036	3	Relamp	No	2	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.0	64	0	\$7	\$50	\$2	6.8
Stairwell 5	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Stair North	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	High/Low Control	S	62	3,036	3	Relamp	No	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.2	771	0	\$85	\$256	\$70	2.2
Stair North	2	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	S	32	3,036	3	Relamp	No	2	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.0	64	0	\$7	\$50	\$2	6.8
Stair North	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Stair South	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	High/Low Control	S	62	3,036	3	Relamp	No	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.2	771	0	\$85	\$256	\$70	2.2
Stair South	2	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	S	32	3,036	3	Relamp	No	2	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.0	64	0	\$7	\$50	\$2	6.8
Stair South	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0





	Existin	g Conditions					Prop	osed Conditio	ns						Energy I	mpact & F	inancial A	nalysis			
Location	Fixture Quantit y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Stairwell 4	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	High/Low Control	S	62	3,036	3	Relamp	No	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.2	771	0	\$85	\$256	\$70	2.2
Stairwell 4	2	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	S	32	3,036	3	Relamp	No	2	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.0	64	0	\$7	\$50	\$2	6.8
Stairwell 4	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
West stair	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	High/Low Control	S	62	3,036	3	Relamp	No	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.2	771	0	\$85	\$256	\$70	2.2
West stair	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Wrestling weight room	20	Linear Fluorescent - T5: 4' T5 (28W) - 4L	Wall Switch	s	120	4,400	3, 4	Relamp	Yes	20	LED - Linear Tubes: (4) 4' Lamps	Occupanc y Sensor	58	3,036	1.2	7,742	-2	\$858	\$2,001	\$470	1.8
Wrestling weight room	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
S6 storage	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	800	3, 4	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	552	0.1	148	0	\$16	\$262	\$40	13.6
Auxillary Gym	24	Linear Fluorescent - T5: 4' T5 (28W) - 4L	Wall Switch	s	120	4,400	3, 4	Relamp	Yes	24	LED - Linear Tubes: (4) 4' Lamps	Occupanc y Sensor	58	3,036	1.4	9,290	-2	\$1,029	\$2,293	\$550	1.7
Auxillary Gym	4	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	4	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
S13 storage	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	800	3, 4	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	552	0.4	443	0	\$49	\$708	\$120	12.0
Aux gym hall	3	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	S	29	3,036		None	No	3	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Aux gym hall	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Electrical room	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	800	3	Relamp	No	4	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	800	0.1	116	0	\$13	\$146	\$40	8.2
Data room 3	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	4,400	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	4,400	0.0	160	0	\$18	\$37	\$10	1.5
Upstairs boiler room	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	800	3	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	800	0.0	58	0	\$6	\$73	\$20	8.2
Hallway 12	3	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	S	29	3,036		None	No	3	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Hallway 12	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Faculty dining	21	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	s	62	3,036	3	Relamp	No	21	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.5	2,314	0	\$256	\$767	\$210	2.2
Faculty dining bathroom	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Occupanc y Sensor	S	33	3,036	3	Relamp	No	1	LED - Linear Tubes: (2) 2' Lamps	Occupanc y Sensor	17	3,036	0.0	53	0	\$6	\$33	\$6	4.5
Hall by faculty room	5	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	S	29	3,036		None	No	5	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
JC7 closet	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	800	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	800	0.0	29	0	\$3	\$37	\$10	8.2
Women 1st floor	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	S	44	3,036		None	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Women 1st floor	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	3,036	3	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.1	661	0	\$73	\$219	\$60	2.2
Women 1st floor	1	Compact Fluores cent: 4 pin - 1	Occupanc y Sensor	S	32	3,036	3	Relamp	No	1	LED Lamps: 4 pin - 1 lamps	Occupanc y Sensor	22	3,036	0.0	32	0	\$4	\$25	\$1	6.8





	Existin	g Conditions					Prop	osed Conditio	ns						Energy In	npact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Men 1st floor	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	S	44	3,036		None	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Men 1st floor	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	3,036	3	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.1	661	0	\$73	\$219	\$60	2.2
Men 1st floor	1	Compact Fluorescent: 4 pin - 1 lamp	Occupanc y Sensor	S	32	3,036	3	Relamp	No	1	LED Lamps: 4 pin - 1 lamps	Occupanc y Sensor	22	3,036	0.0	32	0	\$4	\$25	\$1	6.8
Cafeteria	176	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	S	29	3,036		None	No	176	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Cafeteria	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
JC6 closet	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	800	3	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	800	0.0	58	0	\$6	\$73	\$20	8.2
S4 storage	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	800		None	No	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	800	0.0	0	0	\$0	\$0	\$0	0.0
Store room	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	800	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	800	0.1	87	0	\$10	\$110	\$30	8.2
Serving area	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
Kitchen	11	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	4,400	3	Relamp	No	11	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	4,400	0.4	2,635	-1	\$292	\$602	\$165	1.5
Kitchen storage	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	400	3	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	400	0.0	22	0	\$2	\$55	\$15	16.5
Kitchen restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.0	165	0	\$18	\$55	\$15	2.2
Kitchen office	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	4,400	3	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	4,400	0.0	240	0	\$27	\$55	\$15	1.5
Can room	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	4,400	3	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	4,400	0.0	240	0	\$27	\$55	\$15	1.5
Kitchen	4	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	4	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	661	0	\$73	\$219	\$60	2.2
Maintenance room	4	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	S	29	3,036		None	No	4	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Maintenance room	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Maintenance storage	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	400	3	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	400	0.0	22	0	\$2	\$55	\$15	16.5
Custodian lounge	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	S	29	3,036		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Custodian restroom	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	S	29	3,036		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Maintenance room	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	4,400	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	4,400	0.0	160	0	\$18	\$37	\$10	1.5
Cafeteria hall	14	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	S	29	3,036		None	No	14	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Cafeteria hall	6	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	S	32	3,036	3	Relamp	No	6	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.0	192	0	\$21	\$151	\$6	6.8
Cafeteria hall	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Guidance office	9	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	9	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.3	1,488	0	\$165	\$493	\$135	2.2





	Existin	g Conditions					Prop	osed Conditio	ns						Energy Ir	npact & F	inancial A	nalysis			
Location	Fixture Quantit y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Guidance 2	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Guidance 3	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Guidance 4	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Guidance 5	2	Linear Fluores cent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Guidance pantry	1	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	S	44	3,036		None	No	1	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Guidance conference room	4	Linear Fluores cent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	4	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	661	0	\$73	\$219	\$60	2.2
Guidance office room	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	S	44	3,036		None	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Guidance meeting room	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	S	44	3,036		None	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Athletic director	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Athletic director	4	(32W) - 3L	y Sensor	S	93	3,036	3	Relamp	No	4	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	661	0	\$73	\$219	\$60	2.2
Nurse's office	6	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	6	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.2	992	0	\$110	\$329	\$90	2.2
Weight room	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.0	165	0	\$18	\$55	\$15	2.2
Weight room restroom	1	Linear Fluores cent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	4,400	3	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	4,400	0.0	240	0	\$27	\$55	\$15	1.5
Weight records	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.0	165	0	\$18	\$55	\$15	2.2
Boys locker room	17	Linear Fluores cent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	4,400	3, 4	Relamp	Yes	17	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.8	5,182	-1	\$574	\$1,201	\$290	1.6
Boys locker room	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
BLR restroom	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Switch	S	93	4,400	3, 4	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	610	0	\$68	\$226	\$30	2.9
BLR restroom	2	Compact Fluorescent: 4 pin - 1	Switch	S	32	4,400	3, 4	Relamp	Yes	2	LED Lamps: 4 pin - 1 lamps	Occupanc y Sensor	22	3,036	0.0	160	0	\$18	\$166	\$2	9.3
BLR restroom	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L Linear Fluorescent - T8: 4' T8	Switch	S	62	4,400	3, 4	Relamp	Yes	5	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.2	1,016	0	\$113	\$453	\$50	3.6
Coach Boys office	2	(32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Coach office shower	3	Compact Fluorescent: 4 pin - 1 lamp	Switch	S	32	4,400	3, 4	Relamp	Yes	3	LED Lamps: 4 pin - 1 lamps	Occupanc y Sensor	22	3,036	0.0	240	0	\$27	\$192	\$23	6.3
Coach girls office	2	(32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Coach office shower	3	Compact Fluorescent: 4 pin - 1 lamp Linear Fluorescent - T8: 4' T8	Switch	S	32	4,400	3, 4	Relamp	Yes	3	LED Lamps: 4 pin - 1 lamps	Occupanc y Sensor	22	3,036	0.0	240	0	\$27	\$192	\$23	6.3
Girls locker room	17	(32W) - 3L	y Sensor	S	93	3,036	3	Relamp	No	17	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.6	2,810	-1	\$311	\$931	\$255	2.2
GLR restroom	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2





	Existin	g Conditions					Prop	osed Conditio	ns						Energy I	mpact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
GLR restroom	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	s	62	3,036	3	Relamp	No	5	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.1	551	0	\$61	\$183	\$50	2.2
GLR restroom	1	Compact Fluores cent: 4 pin - 1 lamp	Occupanc y Sensor	s	32	3,036	3	Relamp	No	1	LED Lamps: 4 pin - 1 lamps	Occupanc y Sensor	22	3,036	0.0	32	0	\$4	\$25	\$1	6.8
GLR	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
PE Hallway	4	Linear Fluorescent - T8: 4' T8 (32W) - 3L	High/Low Control	S	93	3,036	3	Relamp	No	4	LED - Linear Tubes: (3) 4' Lamps	High/Low Control	44	3,036	0.1	661	0	\$73	\$219	\$60	2.2
PE Hallway	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Main Gym	43	Linear Fluorescent - T5: 4' T5 (28W) - 4L	Occupanc y Sensor	S	120	3,036	3	Relamp	No	43	LED - Linear Tubes: (4) 4' Lamps	Occupanc y Sensor	58	3,036	1.9	8,903	-2	\$986	\$3,140	\$860	2.3
Main Gym	4	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	4	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Weight room	20	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	s	93	4,400	3, 4	Relamp	Yes	20	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.9	6,097	-1	\$675	\$1,635	\$370	1.9
Weight room	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
WR Coach office	7	Linear Fluorescent - T8: 4' T8 (32W) - 3L	High/Low Control	S	93	3,036	3	Relamp	No	7	LED - Linear Tubes: (3) 4' Lamps	High/Low Control	44	3,036	0.2	1,157	0	\$128	\$383	\$105	2.2
WR Coach office	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
WR Coach restroom	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	4,400	3	Relamp	No	1	LED - Linear Tubes: (2) 2' Lamps	Wall Switch	17	4,400	0.0	77	0	\$9	\$33	\$6	3.1
Main Gym Storage	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	4,400	3, 4	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.1	813	0	\$90	\$262	\$40	2.5
Hall by nurs e office	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	S	29	3,036		None	No	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Hall by nurs e office	4	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	s	32	3,036	3	Relamp	No	4	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.0	128	0	\$14	\$101	\$4	6.8
Hall by nurse office	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
E105 theatre	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.4	1,984	0	\$220	\$657	\$180	2.2
E105 theatre	5	Compact Fluores cent: 4 pin - 1 lamp	Occupanc y Sensor	S	32	3,036	3	Relamp	No	5	LED Lamps: 4 pin - 1 lamps	Occupanc y Sensor	22	3,036	0.0	160	0	\$18	\$126	\$5	6.8
S7 storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	400	3	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	400	0.0	29	0	\$3	\$73	\$20	16.5
Back stage work room	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	400	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	400	0.1	44	0	\$5	\$110	\$30	16.5
Back stage work room	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
S8 storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	800	3, 4	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	552	0.1	74	0	\$8	\$189	\$20	20.6
S8 storage	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	800	3	Relamp	No	1	LED - Linear Tubes: (2) 2' Lamps	Wall Switch	17	800	0.0	14	0	\$2	\$33	\$6	17.0
Stage	8	Halogen Incandescent: Bulb fixture - 1 lamp	Daylight Dimming	S	150	2,640	3	Relamp	No	8	LED Lamps: Bulb fixture - 1 lamp	Daylight Dimming	23	2,640	0.7	2,962	-1	\$328	\$242	\$8	0.7
M1 Mech room	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	800	3	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	800	0.1	174	0	\$19	\$219	\$60	8.2





	Existin	g Conditions					Prop	osed Conditio	ns						Energy Ir	npact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
S9 storage	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	800	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	800	0.0	29	0	\$3	\$37	\$10	8.2
Vestibuler 35	4	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	S	29	3,036		None	No	4	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Vestibuler 35	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Handicap restroom	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	S	29	3,036		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
JC5 storage	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	800		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	800	0.0	0	0	\$0	\$0	\$0	0.0
Handicap restroom	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	S	29	3,036		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
E103 Band room	58	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	3,036	3	Relamp	No	58	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	3,036	1.4	6,392	-1	\$708	\$2,118	\$580	2.2
E103 Band room	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
E103A office	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	4,400	3	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	4,400	0.0	240	0	\$27	\$55	\$15	1.5
Practice room 2	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	s	93	4,400	3	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	4,400	0.0	240	0	\$27	\$55	\$15	1.5
Practice room 2	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	s	93	4,400	3	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	4,400	0.0	240	0	\$27	\$55	\$15	1.5
E101 Music room	27	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	3,036	3	Relamp	No	27	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	3,036	0.6	2,976	-1	\$330	\$986	\$270	2.2
E101 Music room	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
E hallway	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	S	29	3,036		None	No	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
E hallway	2	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	S	32	3,036	3	Relamp	No	2	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.0	64	0	\$7	\$50	\$2	6.8
E hallway	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Tel booth hall	14	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	s	32	3,036	3	Relamp	No	14	LED Lamps: 4 pin - 1 lamps	High/Low Control	22	3,036	0.1	449	0	\$50	\$353	\$14	6.8
E hallway men	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	S	44	3,036		None	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.0	0	0	\$0	\$0	\$0	0.0
E hallway men	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc v Sensor	S	62	3,036	3	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupano v Sensor	29	3,036	0.1	661	0	\$73	\$219	\$60	2.2
E hallway women	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	S	44	3,036		None	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.0	0	0	\$0	\$0	\$0	0.0
E hallway women	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	3,036	3	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	3,036	0.1	661	0	\$73	\$219	\$60	2.2
Auditorium hall	3	Compact Fluorescent: 4 pin - 1 lamp	Wall Switch	S	52	4,400	3	Relamp	No	3	LED Lamps: 4 pin - 1 lamps	Wall Switch	36	4,400	0.0	227	0	\$25	\$76	\$3	2.9
Auditorium hall	33	Halogen Incandes cent: Screw-in 1 lamp	Daylight Dimming	S	250	2,640	3	Relamp	No	33	LED Lamps: Screw-in 1 lamp	Daylight Dimming	38	2,640	5.0	20,364	-4	\$2,256	\$997	\$33	0.4
Auditorium hall	12	Halogen Incandescent: Wall sconces - 1 lamp	Daylight Dimming	S	250	2,640	3	Relamp	No	12	LED Lamps: Wall sconces - 1 lamp	Daylight Dimming	38	2,640	1.8	7,405	-2	\$820	\$363	\$12	0.4
Auditorium hall	22	Halogen Incandescent: Cannister	Daylight Dimming	S	250	2,640	3	Relamp	No	22	LED Lamps: Cannister	Daylight Dimming	38	2,640	3.4	13,576	-3	\$1,504	\$665	\$22	0.4





	Existin	g Conditions					Prop	osed Condition	ons						Energy I	mpact & F	inancial <i>A</i>	Analysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Auditorium hall	6	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	6	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Control room	6	Halogen Incandes cent: Screw-in 1 lamp	Daylight Dimming	S	250	2,640	3	Relamp	No	6	LED Lamps: Screw-in 1 lamp	Daylight Dimming	38	2,640	0.9	3,703	-1	\$410	\$181	\$6	0.4
Auditorium	2	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	4,400	3	Relamp	No	2	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	4,400	0.0	151	0	\$17	\$101	\$4	5.8
Hall by Auditorium	54	Compact Fluorescent: 4 pin - 2 lamps	High/Low Control	s	64	3,036	3	Relamp	No	54	LED Lamps: 4 pin - 2 lamps	High/Low Control	45	3,036	0.7	3,462	-1	\$384	\$2,726	\$108	6.8
Hall by Auditorium	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Hall by Auditorium	2	Compact Fluorescent: (2) 13W Plug-In Lamps	High/Low Control	S	26	3,036	3	Relamp	No	2	LED Lamps: (2) 5W Plug-In Lamps	High/Low Control	10	3,036	0.0	107	0	\$12	\$101	\$4	8.2
Vestibule 38	4	Compact Fluores cent: 4 pin - 1 lamp	None	S	32	4,400	3	Relamp	No	4	LED Lamps: 4 pin - 1 lamp	None	22	4,400	0.0	186	0	\$21	\$101	\$4	4.7
Concession stand	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	s	93	800	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	800	0.1	87	0	\$10	\$110	\$30	8.2
Hall by concession	26	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	S	29	3,036		None	No	26	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Hall by concession	11	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	S	32	3,036	3	Relamp	No	11	LED Lamps: 4 pin - 1 lamp	High/Low Control	22	3,036	0.1	353	0	\$39	\$278	\$11	6.8
Trophy case	9	Linear Fluorescent - T8: 3' T8 (25W) - 1L	None	s	27	4,400	3	Relamp	No	9	LED - Linear Tubes: (1) 3' Lamp	None	11	4,400	0.1	719	0	\$80	\$164	\$45	1.5
Drug addiction pin	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	496	0	\$55	\$164	\$45	2.2
Data room 2	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	4,400	3	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	4,400	0.0	160	0	\$18	\$37	\$10	1.5
Library	13	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	13	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.5	2,149	0	\$238	\$712	\$195	2.2
MC Tech room	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.1	496	0	\$55	\$164	\$45	2.2
Library 2	17	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	3,036	3	Relamp	No	17	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	3,036	0.4	1,874	0	\$208	\$621	\$170	2.2
Library 1	9	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	9	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	3,036	0.3	1,488	0	\$165	\$493	\$135	2.2
Main data room	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	4,400	3	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	4,400	0.0	319	0	\$35	\$73	\$20	1.5
MC storage	4	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	s	93	800	3, 4	Relamp	Yes	4	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	552	0.2	222	0	\$25	\$335	\$60	11.2
39 vestibule	2	Compact Fluores cent: 4 pin - 1 lamp	None	S	32	4,400	3	Relamp	No	2	LED Lamps: 4 pin - 1 lamp	None	22	4,400	0.0	93	0	\$10	\$50	\$2	4.7
Media center	84	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Daylight Dimming	S	93	2,640	3	Relamp	No	84	LED - Linear Tubes: (3) 4' Lamps	Daylight Dimming	44	2,640	3.0	12,075	-3	\$1,338	\$4,601	\$1,260	2.5
Media center	26	Compact Fluores cent: 4 pin - 1 lamp	Daylight Dimming	S	32	2,640	3	Relamp	No	26	LED Lamps: 4 pin - 1 lamp	Daylight Dimming	22	2,640	0.2	725	0	\$80	\$656	\$26	7.8
Media center	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Media center	10	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Daylight Dimming	S	62	2,640	3	Relamp	No	10	LED - Linear Tubes: (2) 4' Lamps	Daylight Dimming	29	2,640	0.2	958	0	\$106	\$365	\$100	2.5
TV Area	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	4,400	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	4,400	0.1	479	0	\$53	\$110	\$30	1.5





	Existin	g Conditions					Prop	osed Conditio	ns						Energy I	mpact & F	inancial A	Analysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Computer area	4	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	4	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.1	661	0	\$73	\$219	\$60	2.2
Security office	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Main office	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	3	LED - Linear Tubes : (3) 4' Lamps	Occupano y Sensor	44	3,036	0.1	496	0	\$55	\$164	\$45	2.2
Office 4	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes : (3) 4' Lamps	Occupano y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Office 3	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Office 5	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	1	LED - Linear Tubes : (3) 4' Lamps	Occupano y Sensor	44	3,036	0.0	165	0	\$18	\$55	\$15	2.2
Office 2	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes : (3) 4' Lamps	Occupano y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Office 1	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes : (3) 4' Lamps	Occupano y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Attendance office	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	4,400	3	Relamp	No	1	LED - Linear Tubes : (3) 4' Lamps	Wall Switch	44	4,400	0.0	240	0	\$27	\$55	\$15	1.5
MO toilet	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Occupanc y Sensor	S	33	3,036	3	Relamp	No	1	LED - Linear Tubes : (2) 2' Lamps	Occupano y Sensor	17	3,036	0.0	53	0	\$6	\$33	\$6	4.5
Office 6	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes : (3) 4' Lamps	Occupano y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Main office hall	13	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	13	LED - Linear Tubes : (3) 4' Lamps	Occupano y Sensor	44	3,036	0.5	2,149	0	\$238	\$712	\$195	2.2
Principal office	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Work room	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.1	496	0	\$55	\$164	\$45	2.2
AP office	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
AP office 2	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.1	331	0	\$37	\$110	\$30	2.2
Conference room	5	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	5	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.2	827	0	\$92	\$274	\$75	2.2
Main office	8	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	3,036	3	Relamp	No	8	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	3,036	0.3	1,322	0	\$147	\$438	\$120	2.2
Main office	2	Compact Fluores cent: 4 pin - 1 lamp	Occupanc y Sensor	S	32	3,036	3	Relamp	No	2	LED Lamps: 4 pin - 1 lamp	Occupano y Sensor	22	3,036	0.0	64	0	\$7	\$50	\$2	6.8
Main office	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Mail room	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	4,400	3	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	4,400	0.0	240	0	\$27	\$55	\$15	1.5
E hall	18	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	S	29	3,036		None	No	18	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	3,036	0.0	0	0	\$0	\$0	\$0	0.0
Main lobby	49	Compact Fluorescent: 4 pin - 1 lamp	High/Low Control	S	32	3,036	3	Relamp	No	49	LED Lamps: 4 pin - 1 lamp	High/Low Control	22	3,036	0.3	1,571	0	\$174	\$1,237	\$49	6.8
Main lobby	3	Compact Fluorescent: (2) 13W Plug-In Lamps	High/Low Control	s	26	3,036	3	Relamp	No	3	LED Lamps: (2) 5W Plug-In Lamps	High/Low Control	10	3,036	0.0	160	0	\$18	\$151	\$6	8.2
Main lobby	4	LED Lamps: (2) 5W Plug-In Lamps	High/Low Control	S	10	3,036		None	No	4	LED Lamps: (2) 5W Plug-In Lamps	High/Low Control	10	3,036	0.0	0	0	\$0	\$0	\$0	0.0





	Existin	g Conditions					Prop	osed Conditio	ns						Energy In	npact & F	inancial A	nalysis			
Location	Fixture Quantit y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Main lobby	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Main entrance	6	Compact Fluores cent: 4 pin - 1 lamp	None	S	32	4,400	3	Relamp	No	6	LED Lamps: 4 pin - 1 lamp	None	22	4,400	0.0	279	0	\$31	\$151	\$6	4.7
Canopy	14	Compact Fluores cent: 4 pin - 1 lamp	Timecloc k		32	4,380	3	Relamp	No	14	LED Lamps: 4 pin - 1 lamp	Timecloc k	22	4,380	0.1	589	0	\$66	\$353	\$14	5.1
Wall pack	46	Mercury Vapor: (1) 175W Lamp	Photocell		205	4,380	1	Fixture Replacement	No	46	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell	62	4,380	3.3	28,912	0	\$3,263	\$44,434	\$0	13.6
Wall mount	29	Compact Fluores cent: Door front - 2 lamps	Photocell		52	4,380	3	Relamp	No	29	LED Lamps: Door front - 2 lamps	Photocell	36	4,380	0.2	1,982	0	\$224	\$999	\$58	4.2
Wall pack	1	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell		54	4,380		None	No	1	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell	54	4,380	0.0	0	0	\$0	\$0	\$0	0.0
Wall pack	1	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell		42	4,380		None	No	1	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell	42	4,380	0.0	0	0	\$0	\$0	\$0	0.0
Football field	4	Halogen Incandescent: Pole light - 21 lamp	Breaker Panel		100	312	3	Relamp	No	4	LED Lamps: Pole light - 21 lamp	Breaker Panel	15	312	0.2	106	0	\$12	\$2,538	\$84	204.9
Parking lot	43	Mercury Vapor: Pole light - 1 lamp	Timecloc k		250	4,380	1	Fixture Replacement	No	43	LED - Fixtures: Large Pole/Arm- Mounted Area/Roadway Fixture	Timecloc k	75	4,380	3.8	32,960	0	\$3,720	\$51,364	\$0	13.8
Court yard	2	Compact Fluorescent: 4 pin - 1 lamp	Timecloc k		26	4,380	3	Relamp	No	2	LED Lamps: 4 pin - 1 lamp	Timecloc k	18	4,380	0.0	68	0	\$8	\$50	\$2	6.3
Court yard	4	Mercury Vapor: Tubular light	Photocell		175	4,380	1	Fixture Replacement	No	4	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell	53	4,380	0.2	2,146	0	\$242	\$3,864	\$0	15.9
Court yard	1	Metal Halide: (1) 70W Lamp	Photocell		95	4,380	1	Fixture Replacement	No	1	LED - Fixtures: High-Bay	Photocell	29	4,380	0.0	291	0	\$33	\$775	\$150	19.0
Court yard	3	Metal Halide: (1) 50W Lamp	Photocell		72	4,380	1	Fixture Replacement	No	3	LED - Fixtures: High-Bay	Photocell	22	4,380	0.1	662	0	\$75	\$2,325	\$450	25.1
B Hall 2nd floor	5	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	5	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0





Motor Inventory & Recommendations

	tory & Necon		g Conditions						Prop	osed Co	ndition	S		Energy In	npact & Fir	nancial An	alysis			
Location	Area(s)/System(s) Served	Motor Quantit y	Motor Application	HP Per Motor	Full Load Efficienc Y	VFD Control?	Remaining Useful Life	Annual Operating Hours	ECM #	Install High Efficienc y Motors?	Full Load Efficiency		Numbe r of VFDs	Total Peak kW Savings		Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Roof	AH-1 Auditorium	1	Supply Fan	15.0	93.0%	No	В	4,000	6	No	93.0%	Yes	1	4.3	18,048	0	\$2,037	\$7,041	\$1,200	2.9
Roof	AH-2 Media Center	1	Supply Fan	5.0	89.5%	No	В	4,000	6	No	89.5%	Yes	1	1.4	6,251	0	\$706	\$4,076	\$400	5.2
Roof	AH-3 SGI/Teacher	1	Supply Fan	2.0	86.5%	No	В	4,000	6	No	86.5%	Yes	1	0.6	2,587	0	\$292	\$3,261	\$160	10.6
Roof	AH-4 Gym	1	Supply Fan	20.0	93.0%	No	В	4,000	6	No	93.0%	Yes	1	5.7	24,065	0	\$2,716	\$8,582	\$1,600	2.6
Roof	AH-5 Gym	1	Supply Fan	10.0	93.7%	No	В	4,000	6	No	93.7%	Yes	1	2.9	11,942	0	\$1,348	\$5,152	\$800	3.2
Roof	AH-6 Admin	1	Supply Fan	7.5	91.0%	Yes	В	4,000		No	91.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	AH-7 Boys locker	1	Supply Fan	5.0	89.5%	No	В	4,000	6	No	89.5%	Yes	1	1.4	6,251	0	\$706	\$4,076	\$400	5.2
Roof	AH-8 Girls locker	1	Supply Fan	5.0	89.0%	No	В	4,000	6	No	89.5%	Yes	1	1.4	6,350	0	\$717	\$4,076	\$400	5.1
Roof	AH-9 Guidance/Nurse	1	Supply Fan	0.5	60.0%	Yes	В	4,000		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	AH-10 Auxilliary gym	1	Supply Fan	5.0	89.5%	No	В	4,000	6	No	89.5%	Yes	1	1.4	6,251	0	\$706	\$4,076	\$400	5.2
Roof	AH-11 Music	1	Supply Fan	1.5	85.5%	No	В	4,000	6	No	86.5%	Yes	1	0.4	2,004	0	\$226	\$3,391	\$120	14.5
Roof	AH-12 Theate	1	Supply Fan	1.5	86.0%	No	В	4,000	6	No	86.5%	Yes	1	0.4	1,972	0	\$223	\$3,391	\$120	14.7
Roof	AH-13 Band	1	Supply Fan	5.0	89.0%	No	В	4,000	6	No	89.5%	Yes	1	1.4	6,350	0	\$717	\$4,076	\$400	5.1
Roof	AH-14 Kitchen	1	Supply Fan	10.0	91.7%	No	В	4,000	6	No	91.7%	Yes	1	2.9	12,203	0	\$1,377	\$5,152	\$800	3.2
Roof	AH-15 Cafeteria	1	Supply Fan	15.0	92.0%	No	В	4,000	6	No	93.0%	Yes	1	4.4	18,598	0	\$2,099	\$7,041	\$1,200	2.8
Roof	AH-16 Class O.A	1	Supply Fan	15.0	92.0%	No	В	4,000	6	No	93.0%	Yes	1	4.4	18,598	0	\$2,099	\$7,041	\$1,200	2.8
Roof	AH-17 Class O.A	1	Supply Fan	15.0	92.0%	No	В	4,000	6	No	93.0%	Yes	1	4.4	18,598	0	\$2,099	\$7,041	\$1,200	2.8
Roof	AH-1 Auditorium	1	Return Fan	5.0	89.0%	No	В	4,000	6	No	89.5%	Yes	1	1.5	6,350	0	\$717	\$4,076	\$400	5.1
Roof	AH-4,5 Gym	2	Return Fan	2.0	86.0%	No	В	4,000	6	No	86.5%	Yes	2	1.2	5,259	0	\$594	\$6,522	\$320	10.4
Roof	AH-7,8 BLR, GLR	2	Return Fan	2.0	86.0%	No	В	4,000	6	No	86.5%	Yes	2	1.2	5,259	0	\$594	\$6,522	\$320	10.4





		Existin	g Conditions						Prop	osed Co	nditions	S		Energy Im	pact & Fir	nancial An	alysis			
Location	Area(s)/System(s) Served	Motor Quantit y	Motor Application	HP Per Motor	Full Load Efficienc Y	VFD Control?	Remaining Useful Life	Annual Operating Hours	ECM #	Install High Efficienc Y Motors?	Full Load Efficiency	Install VFDs?	Numbe r of VFDs	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Roof	AH-13 Band/ Choral	1	Return Fan	2.0	86.0%	No	В	4,000	6	No	86.5%	Yes	1	0.6	2,629	0	\$297	\$3,261	\$160	10.4
Roof	AH-15,16,17	3	Return Fan	5.0	89.0%	No	В	4,000	6	No	89.5%	Yes	3	4.5	19,049	0	\$2,150	\$12,229	\$1,200	5.1
Roof	AH-6	1	Return Fan	5.0	84.5%	Yes	В	4,000		No	84.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	AH-14	1	Return Fan	5.0	84.5%	No	В	4,000	6	No	89.5%	Yes	1	1.6	7,287	0	\$823	\$4,076	\$400	4.5
Roof	MUA	1	Supply Fan	3.0	89.0%	No	В	4,000	6	No	89.5%	Yes	1	0.9	3,810	0	\$430	\$3,884	\$240	8.5
Roof	AHU for auditorium	1	Supply Fan	7.5	91.0%	No	В	4,000	6	No	91.0%	Yes	1	2.1	9,223	0	\$1,041	\$4,738	\$600	4.0
Roof	AHU for auditorium	1	Supply Fan	7.5	91.0%	No	В	4,000	6	No	91.0%	Yes	1	2.1	9,223	0	\$1,041	\$4,738	\$600	4.0
Upper boiler room	HWP-1	1	Heating Hot Water Pump	20.0	88.0%	Yes	W	4,000	5	Yes	93.0%	No		0.5	2,735	0	\$309	\$2,248	\$0	7.3
Upper boiler room	HWP-2	1	Heating Hot Water Pump	20.0	88.0%	Yes	W	4,000	5	Yes	93.0%	No		0.5	2,735	0	\$309	\$2,248	\$0	7.3
Upper boiler room	CWP-1	1	Chilled Water Pump	25.0	93.6%	No	W	2,000	7	No	93.6%	Yes	1	4.6	14,944	0	\$1,687	\$10,845	\$1,500	5.5
Upper boiler room	CWP-2	1	Chilled Water Pump	25.0	93.6%	No	w	2,000	7	No	93.6%	Yes	1	4.6	14,944	0	\$1,687	\$10,845	\$1,500	5.5
Upper boiler room	Back circ. Loop	1	Water Supply Pump	0.0	60.0%	No	W	8,760		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Upper boiler room	DHW booster	1	Water Supply Pump	0.3	60.0%	No	W	8,760		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Upper boiler room	Cold water DCW booster	3	Water Supply Pump	5.0	86.5%	No	W	8,760		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-1	1	Supply Fan	15.0	93.0%	No	В	4,000	6	No	93.0%	Yes	1	4.3	18,048	0	\$2,037	\$7,041	\$1,200	2.9
Boiler room	CHWP - 6,7, Bldg, Pump	2	Chilled Water Pump	5.0	90.2%	Yes	W	2,000		No	90.2%	No		0.0	0	0	\$0	\$0	\$0	0.0
Boiler room	CHWP-3,4 Chiller pump	2	Chilled Water Pump	3.0	90.2%	Yes	W	2,000		No	90.2%	No		0.0	0	0	\$0	\$0	\$0	0.0
Boiler room	HWP - 1,2	2	Heating Hot Water Pump	3.0	90.2%	Yes	W	4,000		No	90.2%	No		0.0	0	0	\$0	\$0	\$0	0.0
Elevator machine room	Hydraulic pump	1	Process Pump	25.0	93.0%	No	W	800		No	93.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Storage	Hot water unit heater	5	Other	0.1	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0





		Existin	g Conditions						Prop	osed Co	nditions	S		Energy In	npact & Fir	nancial An	alysis			
Location	Area(s)/System(s) Served	Motor Quantit y	Motor Application	HP Per Motor	Full Load Efficienc Y	VFD Control?	Remaining Useful Life	Annual Operating Hours	ECM #	Install High Efficienc y Motors?	Full Load Efficiency		Numbe r of VFDs	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Kitchen hood	Kitchen	1	Kitchen Hood Exhaust Fan	0.8	60.0%	No	w	5,250		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Media Ex MPEF-1	1	Exhaust Fan	1.0	85.0%	No	W	4,000		No	85.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	TE-1	1	Exhaust Fan	0.5	60.0%	No	w	4,000		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	TE-2,3 SE-1	3	Exhaust Fan	0.3	60.0%	No	W	4,000		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	TE-4,6	2	Exhaust Fan	0.2	60.0%	No	w	4,000		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	TE-5, SE-2	2	Exhaust Fan	0.3	60.0%	No	W	4,000		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Data room Rm 160E	1	Supply Fan	0.5	60.0%	No	w	4,000		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Combustion Air supply MCA-1	1	Combustion Air Fan	3.0	89.5%	No	w	2,745		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Classroom	1	Exhaust Fan	0.3	60.0%	No	w	4,000		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Mech room	1	Exhaust Fan	0.0	60.0%	No	W	4,000		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Exhaust fans	12	Exhaust Fan	0.3	60.0%	No	W	4,000		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
C hallway 2nd floor	C hallway 2nd floor	4	Supply Fan	0.2	60.0%	No	W	4,000		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0





Electric HVAC Inventory & Recommendations

	-	Existin	g Conditions				Prop	osed Co	nditio	ns					Energy In	ıpact & Fii	nancial An	alysis			
Location	Area(s)/System(s) Served	System Quantit y		Capacit	Heating Capacity	Remaining Useful Life	#	Install High Efficienc y System?	System Quantit y	System Type	Cooling Capacit y per Unit (Tons)	Heating Capacity per Unit (MBh)	Cooling Mode Efficiency (SEER/EER)	Heating Mode Efficiency (COP)	Total Peak kW Savings	LW/h		Total Annual Energy Cost Savings			Simple Payback w/ Incentives in Years
Security office	P-1	1	Packaged Terminal AC	6.60		В	9	Yes	1	Packaged Terminal AC	6.60		12.00		0.9	1,911	0	\$216	\$12,638	\$429	56.6
Roof	Data 160E Room	1	Ductless Mini-Split AC	3.00		В	8	Yes	1	Ductless Mini-Split AC	3.00		18.00		0.7	1,467	0	\$166	\$8,218	\$0	49.6
El evator room	Room 113A	1	Split-System AC	0.75		В	8	Yes	1	Split-System AC	0.75		14.00		0.1	218	0	\$25	\$1,122	\$69	42.8

Electric Chiller Inventory & Recommendations

	-	Existin	g Conditions			Prop	osed Co	nditior	ıs					Energy In	npact & Fir	nancial An	alysis			
Location	I Area(s)/System(s)	Chiller Quantit Y	System Type	v nor	Remaining Useful Life	#	Install High Efficienc y Chillers?	Chiller Quantit Y	System Type	Constant/ Variable Speed	Capacit	У	Efficienc	Total Peak	kWh		Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Roof	Existing building	1	Air-Cooled Screw Chiller	250.00	В	10	Yes	1	Air-Cooled Screw Chiller	Variable	250.00	1.24	0.73	53.5	82,988	0	\$9,367	\$242,216	\$23,000	23.4
Roof	Existing building	2	Air-Cooled Screw Chiller	250.00	В	10	Yes	2	Air-Cooled Screw Chiller	Variable	250.00	1.24	0.73	23.2	35,976	0	\$4,061	\$484,431	\$46,000	108.0
Roof	New section	1	Air-Cooled Scroll Chiller	150.00	В	10	Yes	1	Air-Cooled Scroll Chiller	Variable	150.00	1.24	0.73	13.9	21,645	0	\$2,443	\$206,259	\$13,800	78.8

Fuel Heating Inventory & Recommendations

		Existin	g Conditions			Prop	osed Co	nditio	ns				Energy In	npact & Fir	nancial An	alysis			
Location	Area(s)/System(s)	System Quantit Y	System Type	Output Capacit y per Unit (MBh)	Remaining Useful Life	ECM #	Install High Efficienc y System?	System Quantit Y	System Type	Output Capacit y per Unit (MBh)	Heating Efficienc Y		Total Peak kW Savings			Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Mech section	Combustion Air MCA-1	1	Furnace	400.00	В	11	Yes	1	Furnace	400.00	95.00%	AFUE	0.0	0	22	\$220	\$9,063	\$400	39.4
GUH	Unit heater	1	Warm Air Unit Heater	80.00	В	12	Yes	1	Warm Air Unit Heater	80.00	93.00%	Et	0.0	0	4	\$39	\$2,338	\$0	60.0
Upper boiler room	1st and 2nd floor - Existing building	32	Non-Condensing Hot Water Boiler	335.16	В		No						0.0	0	0	\$0	\$0	\$0	0.0
Boiler room	New Addition	2	Condensing Hot Water Boiler	######	W		No						0.0	0	0	\$0	\$0	\$0	0.0

DHW Inventory & Recommendations

		Existin	g Conditions		Prop	osed Co	nditio	ns			Energy In	npact & Fir	nancial An	alysis			
Location	Area(s)/System(s) Served	System Quantit y	System Type	Remaining Useful Life		Replace?	System Quantit Y	System Type	Fuel Type		Total Peak kW Savings	k\Mb		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Upper boiler room	New section	1	Storage Tank Water Heater (> 50 Gal)	N		No					0.0	0	0	\$0	\$0	\$0	0.0





Low-Flow Device Recommendations

	Recommedation Inputs					Energy Impact & Financial Analysis							
Location	ECM #	Device Quantit Y	Device Type	Existing Flow Rate (gpm)	Proposed Flow Rate (gpm)	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years	
Restrooms	13	20	Faucet Aerator (Lavatory)	2.20	0.50	0.0	0	57	\$567	\$143	\$0	0.3	

Walk-In Cooler/Freezer Inventory & Recommendations

	Existin	g Conditions	Propo	osed Condi	tions		Energy Impact & Financial Analysis							
Location	Cooler/ Freezer Quantit y	Case	ECM #	Install EC Evaporator Fan Motors?	Install Electric Defrost Control?	Install Evaporator Fan Control?	Total Peak kW Savings	kWh		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years	
Kitchen	1	Medium Temp Freezer (0F to 30F)		No	No	No	0.0	0	0	\$0	\$0	\$0	0.0	
Kitchen	1	Cooler (35F to 55F)		No	No	No	0.0	0	0	\$0	\$0	\$0	0.0	





Commercial Refrigerator/Freezer Inventory & Recommendations

	Existin	g Conditions		Proposed	Conditions	Energy In	npact & Fir	nancial An	alysis			
Location	Quantit y	Refrigerator/ Freezer Type	ENERGY STAR Qualified?	ECM #	Install ENERGY STAR Equipment?	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	2	Stand-Up Refrigerator, Glass Door (31 - 50 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Stand-Up Refrigerator, Glass Door (31 - 50 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Stand-Up Refrigerator, Glass Door (31 - 50 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	3	Stand-Up Refrigerator, Solid Door (16 - 30 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Stand-Up Refrigerator, Solid Door (31 - 50 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Stand-Up Freezer, Solid Door (31 - 50 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Stand-Up Refrigerator, Solid Door (31 - 50 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0

Commercial Ice Maker Inventory & Recommendations

	Existin	g Conditions		Proposed (Conditions	Energy Impact & Financial Analysis							
Location	Quantit y	Ice Maker Type	ENERGY STAR Qualified?	ECM#	Install ENERGY STAR Equipment?	Total Peak kW Savings	kWh		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years	
Kitchen	1	Ice Making Head (<450 Ibs/day), Batch	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0	
Kitchen	1	Ice Making Head (<450 Ibs/day), Batch	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0	





Cooking Equipment Inventory & Recommendations

	Existing	Conditions		Proposed	Conditions	Energy I	mpact & F	inancial A	nalysis			
Location	Quantity	Equipment Type	High Efficiency Equipement?	ECM#	Install High Efficiency Equipment?	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	2	Insulated Food Holding Cabinet (1/2 Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Insulated Food Holding Cabinet (1/2 Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	6	Electric Steamer	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Electric Steamer	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Electric Griddle (4 Feet Width)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Gas Steamer	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Electric Combination Oven/Steam Cooker (<15 Pans)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Electric Convection Oven (Half Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0





Plug Load Inventory

_	Existin	g Conditions		
Location	Quantit y	Equipment Description	Energy Rate (W)	ENERGY STAR Qualified ?
Barnegat HS	435	Desktop Computer	145.0	Yes
Barnegat HS	25	Chrome book cart	40.0	Yes
Barnegat HS	20	Server	1,200.0	Yes
Barnegat HS	100	Printer - Small	60.0	Yes
Barnegat HS	21	Printer - Medium	80.0	Yes
Barnegat HS	13	Printer - Large	200.0	Yes
Barnegat HS	5	Paper shredder Paper shredder	200.0	Yes
Barnegat HS	82	Projector	400.0	Yes
Barnegat HS	14	Microwave	900.0	Yes
Barnegat HS	4	Refrigerator - Small	70.0	Yes
Barnegat HS	3	Refrigerator - Medium	90.0	Yes
Barnegat HS	6	Refrigerator - Large	220.0	Yes
Barnegat HS	9	Coffee Machine	400.0	Yes
Barnegat HS	3	Toaster	900.0	Yes
Barnegat HS	4	Toaster oven	1,200.0	Yes
Barnegat HS	1	Clothes Washer	900.0	Yes
Barnegat HS	1	Clothes Dryer	1,500.0	Yes
Barnegat HS	5	Dishwasher	1,000.0	Yes
Barnegat HS	2	CRT - Television	130.0	Yes
Barnegat HS	2	LCD - Television	120.0	Yes
Barnegat HS	5	LCD - Television	120.0	Yes
Barnegat HS	3	Hot and Cold water dispenser	520.0	Yes
Barnegat HS	1	Kiln	17,300.0	Yes
Barnegat HS	1	Electric stove	3,000.0	Yes
Barnegat HS	7	Smart board	5.0	Yes
Barnegat HS	1	Insulated cabinet	1,500.0	Yes





Vending Machine Inventory & Recommendations


	Existin	g Conditions	Proposed	l Conditions	Energy In	npact & Fir	nancial An	alysis			
Location	Quantit y	Vending Machine Type	ECM #	Install Controls?	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings	Total Installation Cost		Simple Payback w/ Incentives in Years
High School	5	Refrigerated	14	Yes	0.9	8,059	0	\$910	\$1,150	\$250	1.0





APPENDIX B: ENERGY STAR® STATEMENT OF ENERGY PERFORMANCE

EUI is presented in terms of *site energy* and *source energy*. Site energy is the amount of fuel and electricity consumed by a building as reflected in utility bills. Source energy includes fuel consumed to generate electricity consumed at the site, factoring in electric production and distribution losses for the region.

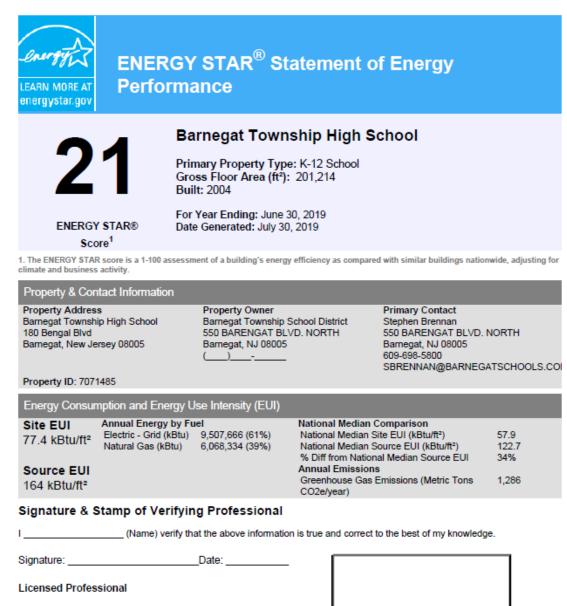

Professional Engineer Stamp (if applicable)





APPENDIX C: GLOSSARY

Blended Rate Used to calculate fiscal savings associated with measures. The blended rate is calculated by dividing the amount of your bill by the total energy use. For example, if your bill is \$22,217.22, and you used 266,400 kilowatt-hours, your blended rate is 8.3 cents per kilowatt-hour. But British thermal unit: a unit of energy equal to the amount of heat required to increase the temperature of one pound of water by one-degree Fahrenheit. CHP Combined heat and power. Also referred to as cogeneration. COP Coefficient of performance: a measure of efficiency in terms of useful energy delivered divided by total energy input. Demand Response Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives. DCV Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR* is the government-backed symbol for energy efficiency. The ENERGY STAR* program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural	TERM	DEFINITION
the temperature of one pound of water by one-degree Fahrenheit. CHP Combined heat and power. Also referred to as cogeneration. COP Coefficient of performance: a measure of efficiency in terms of useful energy delivered divided by total energy input. Demand Response Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives. DCV Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR* is the government-backed symbol for energy efficiency. The ENERGY STAR* program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural	Blended Rate	calculated by dividing the amount of your bill by the total energy use. For example, if your bill is \$22,217.22, and you used 266,400 kilowatt-hours, your blended rate is 8.3
COP Coefficient of performance: a measure of efficiency in terms of useful energy delivered divided by total energy input. Demand Response Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives. DCV Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® Is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural	Btu	=: :
Demand Response Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives. DCV Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of neergy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency The process of generating electric power from sources of primary energy (e.g., natural	СНР	Combined heat and power. Also referred to as cogeneration.
buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives. DCV Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural	СОР	
Introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency The process of generating electric power from sources of primary energy (e.g., natural	Demand Response	buildings/sites during peak energy use periods in response to time-based rates or other
EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural	DCV	
ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural	US DOE	United States Department of Energy
EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency The process of generating electric power from sources of primary energy (e.g., natural	EC Motor	Electronically commutated motor
EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency The process of generating electric power from sources of primary energy (e.g., natural	ECM	Energy conservation measure
Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural	EER	
building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural	EUI	=
STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural	Energy Efficiency	building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of
Generation The process of generating electric power from sources of primary energy (e.g., natural	ENERGY STAR®	
	EPA	United States Environmental Protection Agency
gas, the sun, oil).	Generation	The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil).
GHG Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from leaving Earth's atmosphere. The net effect is a trapping of absorbed radiation and a tendency to warm the planet's surface.	GHG	to long-wave (infrared) radiation, thus preventing long-wave radiant energy from leaving Earth's atmosphere. The net effect is a trapping of absorbed radiation and a
gpf Gallons per flush	gpf	Gallons per flush





gpm	Gallon per minute
HID	High intensity discharge: high-output lighting lamps such as high-pressure sodium, metal halide, and mercury vapor.
hp	Horsepower
HPS	High-pressure sodium: a type of HID lamp.
HSPF	Heating seasonal performance factor: a measure of efficiency typically applied to heat pumps. Heating energy provided divided by seasonal energy input.
HVAC	Heating, ventilating, and air conditioning
IHP 2014	US DOE Integral Horsepower rule. The current ruling regarding required electric motor efficiency.
IPLV	Integrated part load value: a measure of the part load efficiency usually applied to chillers.
kBtu	One thousand British thermal units.
kW	Kilowatt: equal to 1,000 Watts.
kWh	Kilowatt-hour: 1,000 Watts of power expended over one hour.
LED	Light emitting diode: a high-efficiency source of light with a long lamp life.
LGEA	Local Government Energy Audit
Load	The total power a building or system is using at any given time.
Measure	A single activity, or installation of a single type of equipment, that is implemented in a building system to reduce total energy consumption.
МН	Metal halide: a type of HID lamp.
MBh	Thousand Btu per hour
MBtu	One thousand British thermal units
MMBtu	One million British thermal units
MV	Mercury Vapor: a type of HID lamp.
NJBPU	New Jersey Board of Public Utilities
NJCEP	New Jersey's Clean Energy Program: NJCEP is a statewide program that offers financial incentives, programs and services for New Jersey residents, business owners and local governments to help them save energy, money and the environment.
psig	Pounds per square inch gauge.
Plug Load	Refers to the amount of power used in a space by products that are powered by means of an ordinary AC plug.
PV	Photovoltaic: refers to an electronic device capable of converting incident light directly into electricity (direct current).





SEER	Seasonal energy efficiency ratio: a measure of efficiency in terms of annual cooling energy provided divided by total electric input.
SEP	Statement of energy performance: a summary document from the ENERGY STAR® Portfolio Manager®.
Simple Payback	The amount of time needed to recoup the funds expended in an investment or to reach the break-even point between investment and savings.
SREC	Solar renewable energy credit: a credit you can earn from the state for energy produced from a photovoltaic array.
T5, T8, T12	A reference to a linear lamp diameter. The number represents increments of $1/8^{\text{th}}$ of an inch.
Temperature Setpoint	The temperature at which a temperature regulating device (thermostat, for example) has been set.
therm	100,000 Btu. Typically used as a measure of natural gas consumption.
tons	A unit of cooling capacity equal to 12,000 Btu/hr.
Turnkey	Provision of a complete product or service that is ready for immediate use
VAV	Variable air volume
VFD	Variable frequency drive: a controller used to vary the speed of an electric motor.
WaterSense™	The symbol for water efficiency. The WaterSense™ program is managed by the EPA.
Watt (W)	Unit of power commonly used to measure electricity use.







Local Government Energy Audit Report

Robert L. Horbelt Elementary School October 31, 2019

Prepared for:

Barnegat Township School District

104 Burr Street

Barnegat, New Jersey 08005

Prepared by:

TRC

900 Route 9 North

Woodbridge, New Jersey 07095

Disclaimer

The goal of this audit report is to identify potential energy efficiency opportunities, help prioritize specific measures for implementation, and provide information about financial incentives that may be available. Most energy conservation measures have received preliminary analysis of feasibility that identifies expected ranges of savings and costs. This level of analysis is usually considered sufficient to establish a basis for further discussion and to help prioritize energy measures.

TRC reviewed the energy conservation measures and estimates of energy savings were reviewed for technical accuracy. Actual, achieved energy savings depend on behavioral factors and other uncontrollable variables and, therefore, estimates of final energy savings are not guaranteed. TRC and the New Jersey Board of Public Utilities (NJBPU) shall in no event be liable should the actual energy savings vary.

TRC bases estimated installation costs on our experience at similar facilities, pricing from local contractors and vendors, and/or cost estimates from RS Means. We encourage the owner of the facility to independently confirm these cost estimates and to obtain multiple estimates when considering measure installations. Actual installation costs can vary widely based on individual measures and conditions. TRC and NJBPU do not guarantee installed cost estimates and shall in no event be held liable should actual installed costs vary from estimates.

New Jersey's Clean Energy Program (NJCEP) incentive values provided in this report are estimates based on program information available at the time of the report. Incentive levels are not guaranteed. The NJBPU reserves the right to extend, modify, or terminate programs without prior notice. Please review all available program incentives and eligibility requirements prior to selecting and installing any energy conservation measures.

The customer and their respective contractor(s) are responsible to implement energy conservation measures in complete conformance with all applicable local, state and federal requirements.

Copyright ©2019 TRC. All rights reserved.

Reproduction or distribution of the whole, or any part of the contents of this document without written permission of TRC is prohibited. Neither TRC nor any of its employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any data, information, method, product or process disclosed in this document, or represents that its use will not infringe upon any privately-owned rights, including but not limited to, patents, trademarks or copyrights.





Table of Contents

1	Execu	Executive Summary1			
	1.1	Planning Your Project	2		
	Pick	Your Installation Approach			
		re Options from Around the State			
2	Existir	ng Conditions			
	2.1	Site Overview			
	2.2	Building Occupancy			
	2.3	Building Envelope			
	2.4	Lighting Systems			
	2.5	Air Handling Systems			
	Hea	t pump units			
	2.6	Heating Hot Water Systems			
	2.7	Building Energy Management Systems (EMS)			
	2.8 2.9	Domestic Hot WaterFood Service and Refrigeration Equipment			
	2.5	Plug Load & Vending Machines			
	2.11	Water-Using Systems			
	2.12	On-Site Generation			
3	Energ	y Use and Costs	16		
	3.1	Electricity	18		
	3.2	Natural Gas			
	3.3	Benchmarking	20		
	Trac	cking Your Energy Performance	22		
4	Energ	y Conservation Measures	22		
	4.1	Lighting	25		
	ECM	1 1: Install LED Fixtures	25		
		1 2: Retrofit Fixtures with LED Lamps			
	4.2	Lighting Controls	26		
	ECM	1 3: Install Occupancy Sensor Lighting Controls	26		
		1 4: Install High/Low Lighting Controls			
	4.3	Variable Frequency Drives (VFD)	27		
	ECM	1 5: Install VFDs on Constant Volume (CV) Fans	27		
	4.4	Electric Unitary HVAC	28		
	ECM	1 6: Install High-Efficiency Heat Pumps	28		
	4.5	Gas-Fired Heating	28		
	ECM	7 7: Install High-Efficiency Hot Water Boilers			
	4.6	Food Service & Refrigeration Measures			
		<u> </u>	: =:		






	ECM 8: Vending Machine Control	29
5	5 Energy Efficient Best Practices	30
	Energy Tracking with ENERGY STAR® Portfolio Manager®	30
	Lighting Controls	
	Motor Maintenance	30
	Thermostat Schedules and Temperature Resets	30
	AC System Evaporator/Condenser Coil Cleaning	
	HVAC Filter Cleaning and Replacement	
	Boiler Maintenance	
	Furnace Maintenance	
	Water Heater Maintenance	
	Plug Load Controls	
	Water Conservation	
	Procurement Strategies	
6	6 On-site Generation	33
	6.1 Solar Photovoltaic	34
	6.2 Combined Heat and Power	35
7	7 Project Funding and Incentives	36
	7.1 SmartStart	37
	7.2 Direct Install	
	7.3 Pay for Performance - Existing Buildings	
	7.4 Combined Heat and Power	
	7.5 Energy Savings Improvement Program	
	7.6 SREC Registration Program	
8		
	8.1 Retail Electric Supply Options	
	8.2 Retail Natural Gas Supply Options	
_		
•	Appendix A: Equipment Inventory & Recommendations	
	Appendix B: ENERGY STAR® Statement of Energy Performance	
Ar	Appendix C: Glossary	





1 EXECUTIVE SUMMARY

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) report for Robert L. Horbelt Elementary School. This report provides you with information about the Elementary School's energy use, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help make changes in the Elementary School. TRC conducted this study as part of a comprehensive effort to assist New Jersey school districts and local governments in controlling their energy costs and to help protect our environment by reducing statewide energy consumption.

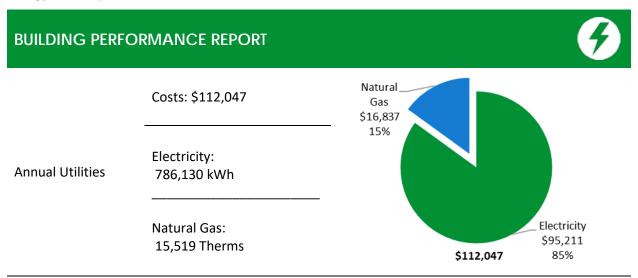

ENERGY STAR® 53 Benchmarking Score (1-100 scale) Congratulations, your building performs better than the national average. This report has suggestions about how to keep your building running efficiently, further improve performance and lower your energy bills even more.

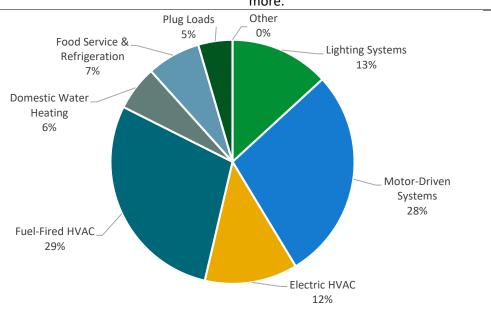


Figure 1 - Energy Use by System






POTENTIAL IMPROVEMENTS



This energy audit considered a range of potential energy improvements in your building. Costs and savings will vary between improvements. Presented below are two potential scopes of work for your consideration.


Scenario 1: Full Package (all evaluated measures)

Installation Cost		\$571,679
Potential Rebates & Incentiv	ves ¹	\$42,688
Annual Cost Savings		\$21,073
Annual Energy Savings		y: 169,007 kWh Gas: 557 Therms
Greenhouse Gas Emission Sa	avings	88 Tons
Simple Payback		25.1 Years
Site Energy Savings (all utilit	ies)	15%



Scenario 2: Cost Effective Package²

Installation Cost	\$85	,669
Potential Rebates & Incentive	es \$15	,957
Annual Cost Savings	\$15	,160
Annual Energy Savings	Electricity: 126,744	kWh
Greenhouse Gas Emission Sa	vings 63	Tons
Simple Payback	4.6 Y	ears
Site Energy Savings (all utilities	es)	10%



On-site Generation Potential

Photovoltaic	High
Combined Heat and Power	None

¹ Incentives are based on current SmartStart Prescriptive incentives. Other program incentives may apply.

² A cost-effective measure is defined as one where the simple payback does not exceed two-thirds of the expected proposed equipment useful life. Simple payback is based on the net measure cost after potential incentives.





#	Energy Conservation Measure	Cost Effective?	Annual Electric Savings (kWh)	Peak Demand Savings (kW)		Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades		86,371	28.7	-16	\$10,290	\$79,033	\$14,532	\$64,501	6.3	85,134
ECM 1	Install LED Fixtures	No	10,534	1.0	0	\$1,276	\$28,954	\$3,100	\$25,854	20.3	10,608
ECM 2	Retrofit Fixtures with LED Lamps	Yes	75,837	27.7	-16	\$9,014	\$50,079	\$11,432	\$38,647	4.3	74,526
Lighting Control Measures			8,757	2.6	-2	\$1,041	\$11,801	\$875	\$10,926	10.5	8,604
ECM 3	Install Occupancy Sensor Lighting Controls	Yes	5,648	1.7	-1	\$671	\$7,178	\$875	\$6,303	9.4	5,549
ECM 4	Install High/Low Lighting Controls	Yes	3,110	0.9	-1	\$370	\$4,623	\$0	\$4,623	12.5	3,055
Variable	Frequency Drive (VFD) Measures		40,538	13.7	0	\$4,910	\$23,559	\$3,600	\$19,959	4.1	40,821
ECM 5	Install VFDs on Constant Volume (CV) Fans	Yes	40,538	13.7	0	\$4,910	\$23,559	\$3,600	\$19,959	4.1	40,821
Electric Unitary HVAC Measures			31,729	13.3	0	\$3,843	\$351,172	\$12,251	\$338,921	88.2	31,951
ECM 6	Install High Efficiency Heat Pumps	No	31,729	13.3	0	\$3,843	\$351,172	\$12,251	\$338,921	88.2	31,951
Gas Heating (HVAC/Process) Replacement			0	0.0	73	\$794	\$105,885	\$11,380	\$94,505	119.0	8,574
ECM 7	Install High Efficiency Hot Water Boilers	No	0	0.0	73	\$794	\$105,885	\$11,380	\$94,505	119.0	8,574
Food Service & Refrigeration Measures			1,612	0.2	0	\$195	\$230	\$50	\$180	0.9	1,623
ECM 8	Vending Machine Control	Yes	1,612	0.2	0	\$195	\$230	\$50	\$180	0.9	1,623
	TOTALS (COST EFFECTIVE MEASURES)		126,744	44.2	-18	\$15,160	\$85,669	\$15,957	\$69,712	4.6	125,574
	TOTALS (ALL MEASURES)		169,007	58.5	56	\$21,073	\$571,679	\$42,688	\$528,991	25.1	176,708

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

Figure 2 – Evaluated Energy Improvements

For more detail on each evaluated energy improvement and a break out of cost-effective improvements, see **Section 4: Energy Conservation Measures**.

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





1.1 Planning Your Project

Careful planning makes for a successful energy project. When considering this scope of work, you will have some decisions to make, such as:

- ♦ How will the project be funded and/or financed?
- Is it best to pursue individual ECMs, groups of ECMs, or use a comprehensive approach where all ECMs are installed together?
- Are there other facility improvements that should happen at the same time?

Pick Your Installation Approach

New Jersey's Clean Energy Programs give you the flexibility to do a little or a lot. Rebates, incentives, and financing are available to help reduce both your installation costs and your energy bills. If you are planning to take advantage of these programs, make sure to review incentive program guidelines before proceeding. This is important because in most cases you will need to submit applications for the incentives before purchasing materials or starting installation.

The potential ECMs identified for this building likely qualify for multiple incentive and funding programs. Based on current program rules and requirements, your measures are likely to qualify for the following programs:

Energy Conservation Measure		SmartStart	Direct Install	Pay For Performance
ECM 1	Install LED Fixtures	Х	Х	
ECM 2	Retrofit Fixtures with LED Lamps	X	Х	
ECM 3	Install Occupancy Sensor Lighting Controls	X	Х	
ECM 4	Install High/Low Lighting Controls		Х	
ECM 5	Install VFDs on Constant Volume (CV) HVAC	X		
ECM 6	Install High Efficiency Heat Pumps	X	Х	
ECM 7	Install High Efficiency Hot Water Boilers	Х		
ECM 8	Vending Machine Control	X	Х	

Figure 3 – Funding Options







New Jersey's Clean Energy Programs At-A-Glance

	SmartStart Flexibility to install at your own pace	Direct Install Turnkey installation	Pay for Performance Whole building upgrades	
Who should use it?	Buildings installing individual measures or small group of measures.	Small to mid-size facilities that can bundle multiple measures together. Average peak demand should be below 200 kW. Not suitable for significant building shell issues.	Mid to large size facilities looking to implement as many measures as possible at one time. Peak demand should be over 200 kW.	
How does it work?	Use in-house staff or your preferred contractor.	Pre-approved contractors pass savings along to you via reduced material and labor costs.	Whole-building approach to energy upgrades designed to reduce energy use by at least 15%. The more you save, the higher the incentives.	
What are the Incentives?	Fixed incentives for specific energy efficiency measures.	Incentives pay up to 70% of eligible costs, up to \$125,000 per project. You pay the remaining 30% directly to the contractor.	Up to 25% of installation cost, calculated based on level of energy savings per square foot.	
How do I participate?	Submit an application for the specific equipment to be installed.	Contact a participating contractor in your region.	Contact a pre-qualified Partner to develop your Energy Reduction Plan and set your energy savings targets.	

Take the next step by visiting **www.njcleanenergy.com** for program details, applications, and to contact a qualified contractor.





Individual Measures with SmartStart

For facilities wishing to pursue only selected individual measures (or planning to phase implementation of selected measures over multiple years), incentives are available through the SmartStart program. To participate, you can use internal resources or an outside firm or contractor to perform the final design of the ECM(s) and install the equipment. Program pre-approval is required for some SmartStart incentives, so only after receiving pre-approval should you proceed with ECM installation.

Turnkey Installation with Direct Install

The Direct Install program provides turnkey installation of multiple measures through an authorized network of participating contractors. This program can provide substantially higher incentives than SmartStart, up to 70% of the cost of selected measures. Direct Install contractors will assess and verify individual measure eligibility, and, in most cases, they perform the installation work. The Direct Install program is available to sites with an average peak demand of less than 200 kW.

Whole Building Approach with Pay for Performance

Pay for Performance can be a good option for medium to large sized facilities to achieve deep energy savings. Pay for Performance allows you to install as many measures as possible under a single project as well as address measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program (ESIP) loan also use this program. Pay for Performance works for larger customers with a peak demand over 200 kW. The minimum installed scope of work must include at least two unique measures resulting in at least 15% energy savings, where lighting cannot make up the majority of the savings.

More Options from Around the State

Financing and Planning Support with the Energy Savings Improvement Program (ESIP)

For larger facilities with limited capital availability to implement ECMs, project financing may be available through the ESIP. Supported directly by the NJBPU, ESIP provides government agencies with project development, design, and implementation support services, as well as, attractive financing for implementing ECMs. You have already taken the first step as an LGEA customer, because this report is required to participate in ESIP.

Resiliency with Return on Investment through Combined Heat & Power (CHP)

The CHP program provides incentives for combined heat and power (aka cogeneration) and waste heat to power projects. Combined heat and power systems generate power on-site and recover heat from the generation system to meet on-site thermal loads. Waste heat to power systems use waste heat to generate power. You will work with a qualified developer who will design a system that meets your building's heating and cooling needs.

Ongoing Electric Savings with Demand Response

The Demand Response Energy Aggregator program reduces electric loads at commercial facilities when wholesale electricity prices are high or when the reliability of the electric grid is threatened due to peak power demand. By enabling commercial facilities to reduce electric demand during times of peak demand, the grid is made more reliable and overall transmission costs are reduced for all ratepayers. Curtailment service providers provide regular payments to medium and large consumers of electric power for their participation in demand response (DR) programs. Program participation is voluntary, and facilities receive payments regardless of whether they are called upon to curtail their load during times of peak demand.





2 FXISTING CONDITIONS

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) Report for Robert L. Horbelt Elementary School. This report provides information on how the Elementary School uses energy, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help you implement the ECMs. This report also contains valuable information on financial incentives from New Jersey's Clean Energy Program (NJCEP) for implementing ECMs.

TRC conducted this study as part of a comprehensive effort to assist New Jersey educational and local government facilities in controlling energy costs and protecting our environment by offering a wide range of energy management options and advice.

For a detailed list of the locations and recommended energy conservation measures for all inventoried equipment, see **Appendix A: Equipment Inventory & Recommendations.**

2.1 Site Overview

On July 3, 2019, TRC performed an energy audit at Robert L. Horbelt Elementary School located in Barnegat, New Jersey. TRC met with Neil Piro to review the facility operations and help focus our investigation on specific energy-using systems.

Robert L. Horbelt Elementary School is a single-story, 80,586 square foot building built in 2001. Spaces include: classrooms, a gymnasium, an auditorium, offices, a cafeteria, corridors, a commercial kitchen, and mechanical space. The Elementary School has onsite generation PV system and is a 100% heated and cooled.

2.2 Building Occupancy

The Elementary School is occupied from September through June. Typical weekday occupancy is approximately 60 staff and 494 students.

Building Name	Weekday/Weekend	Operating Schedule
	Weekday	6:00 AM - 5:00 PM
Robert L. Horbelt Elementary School	Weekend	Saturday: 10:00 AM - 4:00 PM Sunday: 8:30 AM - 11:30 PM (winter only)

Figure 4 - Building Occupancy Schedule





2.3 Building Envelope

Building walls are concrete block over structural steel with a concrete block facade. The dividing walls are made of concrete masonry units. The roof is mainly flat, covered with black membrane and in good condition. Some pitched portions of the roof are made of metal cladding panels.

Most of the windows are double-glazed that have aluminum frames with a thermal break. The glass-to-frame seals are in good condition. Exterior doors have metal fire proof doors and are in good condition.



Pitched Metal Roof



Exterior Doors



Flat Rubber Roof



Façade and Windows





2.4 Lighting Systems

The primary interior lighting system uses 32-Watt linear fluorescent T8 lamps. Additionally, there are some 26-watt 4-pin compact fluorescent lamps (CFL). Typically, T8 fluorescent lamps use electronic ballasts.

Fixture types include 2-, 3-, or 4-lamp, 2- or 4-foot long troffers, and surface-mounted fixtures, 2-foot fixtures with linear tube lamps. Many fixtures are controlled using wall-or remote-mounted occupancy sensors. Most fixtures are in good condition.

All exit signs are LED units. Interior lighting levels were generally sufficient.

The exterior fixtures consist of 26-watt 4 pin CFL fixtures, 42- and 57-watt wall-mounted LED fixtures, and 70-watt metal halide fixtures. The exterior fixtures are controlled using photocells or timeclocks.



Lighting in the Classroom



Pole-mounted Exterior Fixture



Outdoor Wall-mounted Fixture



Multi-purpose Room High-ceiling Fixture





2.5 Air Handling Systems

Heat pump units

The building is mainly conditioned by distributed water source heat pumps with cooling capacities ranging from 1.5- to 5-tons and heating capacities ranging from 26 to 129 MBh. Ground water is distributed to the heat pumps by two variable speed 40 hp circulation pumps. The boiler provides supplemental hot water to the loop when needed. The heat pump units have supply fans of 1.5 hp and EER ratings that range from 10.5 to 12.4. There are several energy recovery units on the roof with supply and return fans of various capacities.

Space temperatures in the zones, as well as loop temperatures, are controlled using an EMS. All units have passed their useful life and been evaluated for replacements.



Energy Recovery Units



Water Source Heat Pump Unit



Water Source Heat Pump Unit



Heat Pump Supply Pumps





2.6 Heating Hot Water Systems

Two condensing hot water Aerco boilers and two non-condensing hot water De Dietrich boilers serve the heat pumps located in the new and older sections, respectively. The boilers have an output capacity of 1694 and 2845 MBH, respectively, and efficiencies of 85% and 83%.

Ground water is circulated to the boilers where it is heated as required, and then distributed using two variable speed 2 and 5 hp pumps to heat pumps located in the respective zones. The boilers also provide hot water to several convectors and unit heaters.

Space and loop temperatures are controlled using an EMS. A roof-mounted cooling tower with a variable speed 7.5 hp fan helps regulate the loop temperature.

The non-condensing boilers serving the older section were installed in the year 1999 and have been evaluated for replacement. The condensing boilers serving the newer section were installed in the year 2008 and are within the useful life of the equipment.



Non-condensing Hot Water Boilers



Heating Hot Water Pumps



Condensing Hot Water Boilers



VFD





2.7 Building Energy Management Systems (EMS)

An Ascent Compass (by Allerton) EMS controls the HVAC equipment, boilers, water source heat pump units, air handlers, and heat recovery units (HRU). The EMS provides equipment scheduling control and monitors and controls space temperatures, supply air temperatures, and heating water loop temperatures.

The site staff expressed that the existing system in place is incapable of controlling and handling the load and might need an expansion in the level of control.



Floor 1-Spaces, Units, and Temperatures



Heat Pump Unit



EMS Shot Showing All Equipment Controlled



Main Office Heat Pump Unit





2.8 Domestic Hot Water

One gas-fired and one electric water heater serve the domestic hot water needs of the Elementary School. The Laars gas-fired unit has an input capacity of 250 MBh, a tank capacity of 100 gallons, and 80% efficiency. The unit was installed in 2015 and is in good condition and well-maintained. The AO Smith unit is electric and has an input capacity of 24kW and a tank capacity of 30 gallons. This unit has passed its useful life.

Hot water is distributed to the end uses using fractional horse power circulating pumps.



Laars Gas-fired Unit



AO Smith electric Unit





2.9 Food Service and Refrigeration Equipment

The kitchen has a mix of gas and electric equipment including gas convection oven, steamer, and a griddle that are used to prepare meals for students. Most cooking is done using a convection gas-fired oven. Bulk prepared foods are held in several electric holding cabinets. Equipment is high-efficiency and in good condition.

The kitchen has several stand-up solid door refrigerators. There are also refrigerator and freezer chests. All equipment is standard efficiency and appears to be in good condition.

The walk-in refrigerator has an estimated 0.75-ton compressor and a two-fan evaporator. The walk-in medium temperature freezer has an approximately 0.9-ton compressor and a two-fan evaporator with defrost controls.

Visit https://www.energystar.gov/products/commercial food service equipment for the latest information on high-efficiency food service equipment.



Convection Oven



Reach -in Refrigerator



Walk-in Refrigerator



Walk-in Evaporator Fan





2.10 Plug Load & Vending Machines

The utility bill analysis indicates that plug loads consume approximately 5% percent of total building energy use. This is higher than a typical building.

You may wish to consider paying particular attention to minimizing your plug load usage. This report makes suggestions for ECMs in this area, as well as Energy Efficient Best Practices.

There are approximately 113 computer work stations throughout the Elementary School. Plug loads throughout the building include general café and office equipment. There are classroom typical loads such as Smart Boards, projectors, and fans. There are several residential-style refrigerators throughout the building that are used to store food for the staff. These vary in condition and efficiency.

There is one refrigerated beverage vending machines and one non-refrigerated vending machines. Vending machines are not equipped with occupancy-based controls.

2.11 Water-Using Systems

Faucet flow rates are at 1.5 gallons per minute (gpm) or higher. Toilets are rated at 1.6 gallons per flush (gpf) and urinals are rated at 1.0 gpf.

2.12 On-Site Generation

Robert L. Horbelt Elementary School has approximately 170 panels and a 50 kW photovoltaic (PV) array that was installed in 2011. This system provides approximately 5.2% of the electricity used at the Elementary School and was financed by a Power Purchase Agreement (PPA).





Solar Array

Solar Array






3 ENERGY USE AND COSTS

Twelve months of utility billing data are used to develop annual energy consumption and cost data. This information creates a profile of the annual energy consumption and energy costs.

Utility Summary								
Fuel Usage Cost								
Electricity	786,130 kWh	\$95,211						
Natural Gas	15,519 Therms	\$16,837						
Total	\$112,047							



An energy balance identifies and quantifies energy use in your various building systems. This can highlight areas with the most potential for improvement. This energy balance was developed using calculated energy use for each of the end uses noted in the figure.

The energy auditor collects information regarding equipment operating hours, capacity, efficiency, and other operational parameters from facility staff, drawings, and on-site observations. This information is used as the inputs to calculate the existing conditions energy use for the site. The calculated energy use is then compared to the historical energy use and the initial inputs are revised, as necessary, to balance the calculated energy use to the historical energy use.





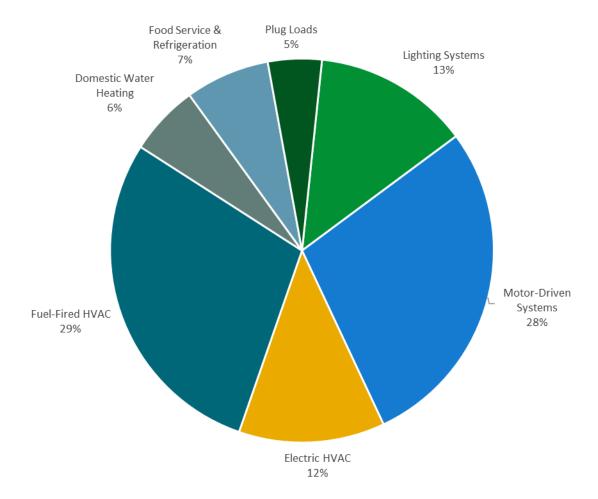



Figure 5 - Energy Balance





3.1 Electricity

JCP&L delivers electricity under rate class GSSS, with electric production provided by South Jersey Energy, a third-party supplier.

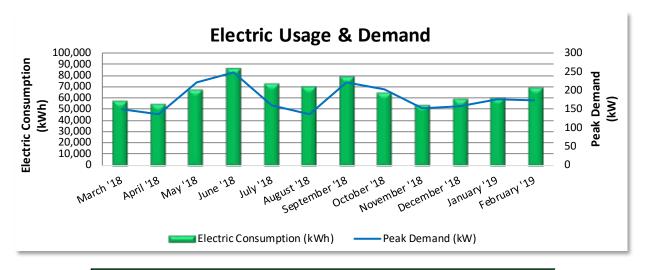

	Electric Billing Data											
Period Ending	Days in Period	Electric Usage (kWh)	Demand (kW)	Demand Cost	Total Electric Cost							
3/27/18	30	56,851	150	\$921	\$6,105							
4/25/18	29	54,099	137	\$803	\$6,080							
5/25/18	30	66,559	221	\$1,320	\$7,605							
6/26/18	32	85,831	249	\$1,609	\$9,679							
7/26/18	30	72,320	161	\$1,016	\$7,863							
8/27/18	32	69,514	136	\$849	\$7,378							
9/26/18	30	77,912	222	\$1,423	\$8,661							
10/25/18	29	64,095	204	\$1,218	\$8,030							
11/27/18	33	53,329	151	\$885	\$6,522							
12/27/18	30	59,100	158	\$929	\$7,626							
1/25/19	29	59,929	176	\$1,042	\$12,322							
2/26/19	32	68,745	173	\$1,025	\$7,602							
Totals	366	788,284	249	\$13,040	\$95,471							
Annual	365	786,130	249	\$13,004	\$95,211							

Notes:


- Peak demand of 249 kW occurred in June '18.
- The average electric cost over the past 12 months was \$0.121/kWh, which is the blended rate that includes energy supply, distribution, demand, and other charges. This report uses this blended rate to estimate energy cost savings.





3.2 Natural Gas

NJ Natural Gas delivers natural gas under rate class GSL, with natural gas supply provided by South Jersey Energy, a third-party supplier.

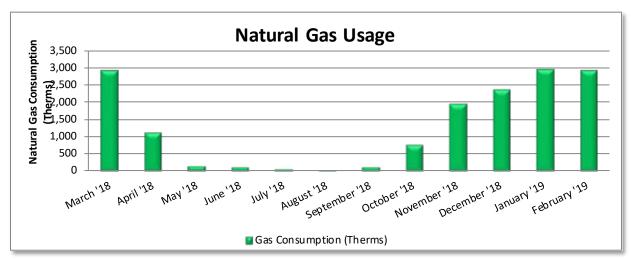

	Gas Billing Data										
Period Ending	Days in Period	Natural Gas Usage (Therms)	Natural Gas Cost								
4/6/18	30	2,905	\$2,600								
5/2/18	26	1,111	\$1,165								
6/1/18	30	160	\$149								
7/5/18	34	127	\$402								
8/2/18	28	60	\$349								
8/28/18	26	55	\$347								
10/1/18	34	118	\$373								
11/1/18	31	758	\$866								
12/4/18	33	1,953	\$1,781								
12/31/18	27	2,343	\$2,793								
2/1/19	32	2,929	\$3,069								
3/5/19	32	2,915	\$2,850								
Totals	363	15,434	\$16,744								
Annual	365	15,519	\$16,837								

Notes:

• The average gas cost for the past 12 months is \$1.085/therm, which is the blended rate used throughout the analysis.





3.3 Benchmarking

Your building was benchmarked using the United States Environmental Protection Agency's (EPA) *Portfolio Manager®* software. Benchmarking compares your building's energy use to that of similar buildings across the country, while neutralizing variations due to location, occupancy and operating hours. Some building types can be scored with a 1-100 ranking of a building's energy performance relative to the national building market. A score of 50 represents the national average and a score of 100 is best.

This ENERGY STAR® benchmarking score provides a comprehensive snapshot of your building's energy performance. It assesses the building's physical assets, operations, and occupant behavior, which is compiled into a quick and easy-to-understand score.

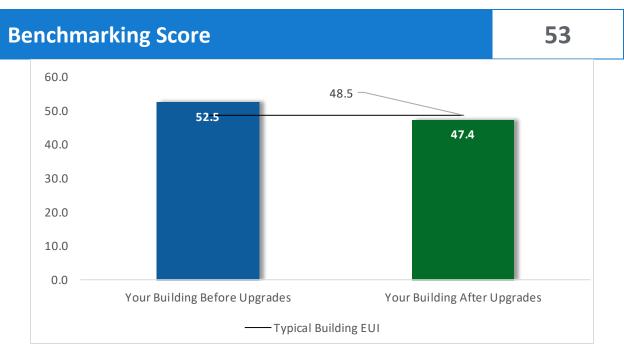


Figure 6 - Energy Use Intensity Comparison

Congratulations, your building performs better than the national average. This report has suggestions about how to keep your building running efficiently, further improve performance, and lower your energy bills even more.

Energy use intensity (EUI) measures energy consumption per square foot and is the standard metric for comparing buildings' energy performance. A lower EUI means better performance and less energy consumed. A number of factors can cause as building to vary from the "typical" energy usage. Local weather conditions, building age and insulation levels, equipment efficiency, daily occupancy hours, changes in occupancy throughout the year, equipment operating hours, and occupant behavior all contribute to a building's energy use and the benchmarking score.





Tracking Your Energy Performance

Keeping track of your energy use on a monthly basis is one of the best ways to keep energy costs in check. Update your utility information in Portfolio Manager® regularly, so that you can keep track of your building's performance.

We have created a Portfolio Manager® account for your facility and we have already entered the monthly utility data shown above for you. Account login information for your account will be sent via email.

Free online training is available to help you use ENERGY STAR® Portfolio Manager® to track your building's performance at: https://www.energystar.gov/buildings/training.

For more information on ENERGY STAR® and Portfolio Manager®, visit their website³.

LGEA Report - Barnegat Township School District Robert L. Horbelt Elementary School

³ https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/earn-recognition/energy-star-certification/how-app-1.





4 ENERGY CONSERVATION MEASURES

The goal of this audit report is to identify and evaluate potential energy efficiency improvements, provide information about the cost effectiveness of those improvements, and recognize potential financial incentives from NJBPU. Most energy conservation measures have received preliminary analysis of feasibility which identifies expected ranges of savings and costs. This level of analysis is typically sufficient to demonstrate project cost-effectiveness and help prioritize energy measures.

Calculations of energy use and savings are based on the current version of the *New Jersey's Clean Energy Program Protocols to Measure Resource Savings*, which is approved by the NJBPU. Further analysis or investigation may be required to calculate more precise savings based on specific circumstances.

Operation and maintenance costs for the proposed new equipment will generally be lower than the current costs for the existing equipment—especially if the existing equipment is at or past its normal useful life. We have conservatively assumed there to be no impact on overall maintenance costs over the life of the equipment.

Financial incentives are based on the current NJCEP prescriptive SmartStart program. A higher level of investigation may be necessary to support any SmartStart Custom, Pay for Performance, or Direct Install incentive applications. Some measures and proposed upgrades may be eligible for higher incentives than those shown below through other NJCEP programs described in a following section of this report.





#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (Ibs)
Lighting	Upgrades	86,371	28.7	-16	\$10,290	\$79,033	\$14,532	\$64,501	6.3	85,134
ECM 1	Install LED Fixtures	10,534	1.0	0	\$1,276	\$28,954	\$3,100	\$25,854	20.3	10,608
ECM 2	Retrofit Fixtures with LED Lamps	75,837	27.7	-16	\$9,014	\$50,079	\$11,432	\$38,647	4.3	74,526
Lighting	Control Measures	8,757	2.6	-2	\$1,041	\$11,801	\$875	\$10,926	10.5	8,604
ECM 3	Install Occupancy Sensor Lighting Controls	5,648	1.7	-1	\$671	\$7,178	\$875	\$6,303	9.4	5,549
ECM 4	Install High/Low Lighting Controls	3,110	0.9	-1	\$370	\$4,623	\$0	\$4,623	12.5	3,055
Variable	Frequency Drive (VFD) Measures	40,538	13.7	0	\$4,910	\$23,559	\$3,600	\$19,959	4.1	40,821
ECM 5	Install VFDs on Constant Volume (CV) Fans	40,538	13.7	0	\$4,910	\$23,559	\$3,600	\$19,959	4.1	40,821
Electric l	Jnitary HVAC Measures	31,729	13.3	0	\$3,843	\$351,172	\$12,251	\$338,921	88.2	31,951
ECM 6	Install High Efficiency Heat Pumps	31,729	13.3	0	\$3,843	\$351,172	\$12,251	\$338,921	88.2	31,951
Gas Heat	ing (HVAC/Process) Replacement	0	0.0	73	\$794	\$105,885	\$11,380	\$94,505	119.0	8,574
ECM 7	Install High Efficiency Hot Water Boilers	0	0.0	73	\$794	\$105,885	\$11,380	\$94,505	119.0	8,574
Food Ser	vice & Refrigeration Measures	1,612	0.2	0	\$195	\$230	\$50	\$180	0.9	1,623
ECM 8	Vending Machine Control	1,612	0.2	0	\$195	\$230	\$50	\$180	0.9	1,623
	TOTALS	169,007	58.5	56	\$21,073	\$571,679	\$42,688	\$528,991	25.1	176,708

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance

Figure 7 – All Evaluated ECMs

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





#	Energy Conservation Measure	Annual Electric Savings (kWh)		Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades	75,837	27.7	-16	\$9,014	\$50,079	\$11,432	\$38,647	4.3	74,526
ECM 2	Retrofit Fixtures with LED Lamps	75,837	27.7	-16	\$9,014	\$50,079	\$11,432	\$38,647	4.3	74,526
Lighting	Control Measures	8,757	2.6	-2	\$1,041	\$11,801	\$875	\$10,926	10.5	8,604
ECM 3	Install Occupancy Sensor Lighting Controls	5,648	1.7	-1	\$671	\$7,178	\$875	\$6,303	9.4	5,549
ECM 4	Install High/Low Lighting Controls	3,110	0.9	-1	\$370	\$4,623	\$0	\$4,623	12.5	3,055
Variable	Frequency Drive (VFD) Measures	40,538	13.7	0	\$4,910	\$23,559	\$3,600	\$19,959	4.1	40,821
ECM 5	Install VFDs on Constant Volume (CV) Fans	40,538	13.7	0	\$4,910	\$23,559	\$3,600	\$19,959	4.1	40,821
Food Se	rvice & Refrigeration Measures	1,612	0.2	0	\$195	\$230	\$50	\$180	0.9	1,623
ECM 8	Vending Machine Control	1,612	0.2	0	\$195	\$230	\$50	\$180	0.9	1,623
	TOTALS	126,744	44.2	-18	\$15,160	\$85,669	\$15,957	\$69,712	4.6	125,574

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance

Figure 8 – Cost Effective ECMs

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





4.1 Lighting

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*			CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades	86,371	28.7	-16	\$10,290	\$79,033	\$14,532	\$64,501	6.3	85,134
ECM 1	Install LED Fixtures	10,534	1.0	0	\$1,276	\$28,954	\$3,100	\$25,854	20.3	10,608
ECM 2	Retrofit Fixtures with LED Lamps	75,837	27.7	-16	\$9,014	\$50,079	\$11,432	\$38,647	4.3	74,526

When considering lighting upgrades, we suggest using a comprehensive design approach that simultaneously upgrades lighting fixtures and controls to maximize energy savings and improve occupant lighting. Comprehensive design will also consider appropriate lighting levels for different space types to make sure that the right amount of light is delivered where needed. If conversion to LED light sources is proposed, we suggest converting all fixtures of a specific lighting type (e.g. linear fluorescent) to LED lamps to minimize the number of lamp types in use at the Elementary School, which should help reduce future maintenance costs.

ECM 1: Install LED Fixtures

Replace existing fixtures containing HID lamps with new LED light fixtures. This measure saves energy by installing LEDs, which use less power than other technologies with a comparable light output.

In some cases, HID fixtures can be retrofit with screw-based LED lamps. Replacing an existing HID fixture with a new LED fixture will generally provide better overall lighting optics; however, replacing the HID lamp with a LED screw-in lamp is typically a less expensive retrofit. We recommend you work with your lighting contractor to determine which retrofit solution is best suited to your needs and will be compatible with the existing fixture(s).

Maintenance savings may also be achieved, as LED lamps last longer than other light sources and therefore do not need to be replaced as often.

Affected building areas: exterior fixtures.

ECM 2: Retrofit Fixtures with LED Lamps

Replace fluorescent or CFL with LED lamps. Many LED tubes are direct replacements for existing fluorescent tubes and can be installed while leaving the fluorescent fixture ballast in place. LED lamps can be used in existing fixtures as direct replacements for most other lighting technologies.

This measure saves energy by installing LEDs, which use less power than other lighting technologies while providing equivalent lighting output for the space. Maintenance savings may also be available, as longer-lasting LEDs lamps will not need to be replaced as often as the existing lamps.

Affected building areas: all areas with fluorescent fixtures with T8 tubes and CFL.





4.2 Lighting Controls

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Lighting	Control Measures	8,757	2.6	-2	\$1,041	\$11,801	\$875	\$10,926	10.5	8,604
LECM 3	Install Occupancy Sensor Lighting Controls	5,648	1.7	-1	\$671	\$7,178	\$875	\$6,303	9.4	5,549
I ECM 4	Install High/Low Lighting Controls	3,110	0.9	-1	\$370	\$4,623	\$0	\$4,623	12.5	3,055

Lighting controls reduce energy use by turning off or lowering lighting fixture power levels when not in use. A comprehensive approach to lighting design should upgrade the lighting fixtures and the controls together for maximum energy savings and improved lighting for occupants.

ECM 3: Install Occupancy Sensor Lighting Controls

Install occupancy sensors to control lighting fixtures in areas that are frequently unoccupied, even for short periods. For most spaces, we recommend that lighting controls use dual technology sensors, which reduce the possibility of lights turning off unexpectedly.

Occupancy sensors detect occupancy using ultrasonic and/or infrared sensors. When an occupant enters the space, the lighting fixtures switch to full lighting levels. Most occupancy sensor lighting controls allow users to manually turn fixtures on/off, as needed. Some controls can also provide dimming options.

Occupancy sensors can be mounted on the wall at existing switch locations, on the ceiling, or in remote locations. In general, wall switch replacement sensors are best suited to single occupant offices and other small rooms. Ceiling-mounted or remote-mounted sensors are used in large spaces, locations without local switching, and where wall switches are not in the line-of-sight of the main work area.

This measure provides energy savings by reducing the lighting operating hours.

Affected building areas: offices, conference rooms, classrooms, gymnasium, library, restrooms, and storage rooms.

ECM 4: Install High/Low Lighting Controls

Install occupancy sensors to provide dual level lighting control for lighting fixtures in spaces that are infrequently occupied but may require some level of continuous lighting for safety or security reasons.

Lighting fixtures with these controls operate at default low levels when the area is unoccupied to provide minimal lighting to meet security or safety requirements. Sensors detect occupancy using ultrasonic and/or infrared sensors. When an occupant enters the space, the lighting fixtures switch to full lighting levels. Fixtures automatically switch back to low levels after a predefined period of vacancy. In parking lots and parking garages with significant ambient lighting, this control can sometimes be combined with photocell controls to turn the lights off when there is sufficient daylight.

The control lowers the light level by dimming the fixture output. Therefore, the controlled fixtures need to have a dimmable ballast or driver. This will need to be taken into account when selecting retrofit lamps and bulbs for the areas proposed for high/low control.

This measure provides energy savings by reducing the light fixture power draw when reduced light output is appropriate.

Affected building areas: hallways





4.3 Variable Frequency Drives (VFD)

#	Energy Conservation Measure		Peak Demand Savings (kW)		Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)				CO ₂ e Emissions Reduction (lbs)
Variable	e Frequency Drive (VFD) Measures	40,538	13.7	0	\$4,910	\$23,559	\$3,600	\$19,959	4.1	40,821
LECM 5	Install VFDs on Constant Volume (CV) Fans	40,538	13.7	0	\$4,910	\$23,559	\$3,600	\$19,959	4.1	40,821

Variable frequency drives (VFDs) control motors for fans, pumps, and process equipment based on the actual output required of the driven equipment. Energy savings result from more efficient control of motor energy usage when equipment operates at partial load. The magnitude of energy savings depends on the estimated amount of time that the motor would operate at partial load. For equipment with proposed VFDs, we have included replacing the controlled motor with a new motor to conservatively account for the cost of an inverter duty rated motor.

Premium efficiency motors have been proposed to be installed only in conjunction with proposed VFD motor measures. Non-inverter duty rated motors will need to be replaced when the VFD measure is implemented.

ECM 5: Install VFDs on Constant Volume (CV) Fans

Install VFDs to control constant volume fan motor speeds. This converts a constant-volume, single-zone air handling system into a variable-air-volume (VAV) system. A separate VFD is usually required to control the return fan motor or dedicated exhaust fan motor, if the air handler has one.

Zone thermostats signal the VFD to adjust fan speed to maintain the appropriate temperature in the zone while maintaining a constant supply air temperature.

For air handlers with direct expansion (DX) cooling systems, the minimum air flow across the cooling coil required to prevent the coil from freezing must be determined during the final project design. The control system programming should maintain the minimum air flow whenever the compressor is operating. Prior to implementation, verify minimum fan speed in cooling mode with the manufacturer. Note that savings will vary depending on the operating characteristics of each AHU.

Energy savings result from reducing the fan speed (and power) when conditions allow for reduced air flow.

Affected air handlers: supply and the return fans of the RTU and the AHU (15 hp and 7.5 hp).





4.4 Electric Unitary HVAC

#	Energy Conservation Measure		Peak Demand Savings (kW)		Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)				CO ₂ e Emissions Reduction (lbs)
Electric	Unitary HVAC Measures	31,729	13.3	0	\$3,843	\$351,172	\$12,251	\$338,921	88.2	31,951
I ECM 6	Install High Efficiency Heat Pumps	31,729	13.3	0	\$3,843	\$351,172	\$12,251	\$338,921	88.2	31,951

Replacing the unitary HVAC units has a long payback period and may not be justifiable based simply on energy considerations. However, most of the units at the Elementary School are nearing or have reached the end of their normal useful life. Typically, the marginal cost of purchasing a high-efficiency unit can be justified by the marginal savings from the improved efficiency. When the heat pump units are eventually replaced, consider purchasing equipment that exceeds the minimum efficiency required by building codes.

ECM 6: Install High-Efficiency Heat Pumps

Replace standard efficiency heat pumps with high-efficiency heat pumps. A higher EER or SEER rating indicates a more efficient cooling system and a higher HSPF rating indicates more efficient heating mode. The magnitude of energy savings for this measure depends on the relative efficiency of the older unit versus the new high-efficiency unit, average heating and cooling loads, and estimated annual operating hours.

4.5 Gas-Fired Heating

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)		Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)				CO₂e Emissions Reduction (Ibs)
Gas He	ating (HVAC/Process) Replacement	0	0.0	73	\$794	\$105,885	\$11,380	\$94,505	119.0	8,574
LECM 7	Install High Efficiency Hot Water Boilers	0	0.0	73	\$794	\$105,885	\$11,380	\$94,505	119.0	8,574

ECM 7: Install High-Efficiency Hot Water Boilers

Replace older inefficient hot water boilers with high-efficiency hot water boilers. Energy savings results from improved combustion efficiency and reduced standby losses at low loads.

The most notable efficiency improvement is condensing hydronic boilers, which can achieve over 90% efficiency under the proper conditions. Condensing hydronic boilers typically operate at efficiencies between 85% and 87% (comparable to other high-efficiency boilers) when the return water temperature is above 130°F. The boiler efficiency increases as the return water temperature drops below 130°F. Therefore, condensing hydronic boilers are evaluated when the return water temperature is less than 130°F during most of the operating hours.

For the purposes of this analysis, we evaluated the replacement of boilers on a one-for-one basis with equipment of the same capacity. We recommend that you work with your mechanical design team to select boilers that are sized appropriately for the heating load at the Elementary School. In many cases,





installing multiple modular boilers rather than one or two large boilers will result in higher overall plant efficiency while providing additional system redundancy.

Replacing the boilers has a long payback and may not be justifiable based simply on energy considerations. However, the boilers are nearing the end of their normal useful life. Typically, the marginal cost of purchasing high-efficiency boilers can be justified by the marginal savings from the improved efficiency. When the boiler is eventually replaced, consider purchasing boilers that exceed the minimum efficiency required by building codes. We also recommend working with your mechanical design team to determine whether the heating system can operate with return water temperatures below 130°F, which would allow the use of condensing boilers.

4.6 Food Service & Refrigeration Measures

#	Energy Conservation Measure		Peak Demand Savings (kW)		Cost	Estimated Install Cost (\$)				CO ₂ e Emissions Reduction (lbs)
Food S	ervice & Refrigeration Measures	1,612	0.2	0	\$195	\$230	\$50	\$180	0.9	1,623
ECM 8	Vending Machine Control	1,612	0.2	0	\$195	\$230	\$50	\$180	0.9	1,623

ECM 8: Vending Machine Control

Vending machines operate continuously, even during unoccupied hours. Install occupancy sensor controls to reduce energy use. These controls power down vending machines when the vending machine area has been vacant for some time and power up the machines at necessary regular intervals or when the surrounding area is occupied. Energy savings are dependent on the vending machine and activity level in the area surrounding the machines.





5 ENERGY EFFICIENT BEST PRACTICES

A whole building maintenance plan will extend equipment life; improve occupant comfort, health, and safety; and reduce energy and maintenance costs. You may already be doing some of these things— see our list below for potential additions to your maintenance plan. Be sure to consult with qualified equipment specialists for details on proper maintenance and system operation.

Energy Tracking with ENERGY STAR® Portfolio Manager®



You've heard it before - you can't manage what you don't measure. ENERGY STAR® Portfolio Manager® is an online tool that you can use to measure and track energy and water consumption, as well as greenhouse gas emissions⁴. Your account has already been established. Now you can continue to keep tabs on your energy performance every month.

Lighting Controls

As part of a lighting maintenance schedule, test lighting controls to ensure proper functioning. For occupancy sensors, this requires triggering the sensor and verifying that the sensor's timer settings are correct. For daylight and photocell sensors, maintenance involves cleaning sensor lenses and confirming that setpoints and sensitivity are configured properly.

Motor Maintenance

Motors have many moving parts. As these parts degrade over time, the efficiency of the motor is reduced. Routine maintenance prevents damage to motor components. Routine maintenance should include cleaning surfaces and ventilation openings on motors to prevent overheating, lubricating moving parts to reduce friction, inspecting belts and pulleys for wear and to ensure they are at proper alignment and tension, and cleaning and lubricating bearings. Consult a licensed technician to assess these and other motor maintenance strategies.

Thermostat Schedules and Temperature Resets



Use thermostat setback temperatures and schedules to reduce heating and cooling energy use during periods of low or no occupancy. Thermostats should be programmed for a setback of 5-10°F during low occupancy hours (reduce heating setpoints and increase cooling setpoints). Cooling load can be reduced by increasing the facility's occupied setpoint temperature. In general, during the cooling season, thermostats should be set as high as possible without sacrificing occupant comfort.

AC System Evaporator/Condenser Coil Cleaning

Dirty evaporator and condenser coils restrict air flow and restrict heat transfer. This increases the loads on the evaporator and condenser fan, and decreases overall cooling system performance. Keeping the coils clean allows the fans and cooling system to operate more efficiently.

https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/use-portfolio-manager.





HVAC Filter Cleaning and Replacement

Air filters should be checked regularly (often monthly) and cleaned or replaced when appropriate. Air filters reduce indoor air pollution, increase occupant comfort, and help keep equipment operating efficiently. If the building has a building management system, consider installing a differential pressure switch across filters to send an alarm about premature fouling or overdue filter replacement. Over time, filters become less and less effective as particulate buildup increases. Dirty filters also restrict air flow through the air conditioning or heat pump system, which increases the load on the distribution fans.

Boiler Maintenance

Many boiler problems develop slowly over time, so regular inspection and maintenance is essential to keeping the heating system running efficiently and preventing expensive repairs. Annual tune-ups should include a combustion analysis to analyze the exhaust from the boilers and to ensure the boiler is operating safely. Boilers should be cleaned according to the manufacturer's instructions to remove soot and scale from the water side or fire side of the boiler.

Furnace Maintenance

Preventative maintenance can extend the life of the system, maintain energy efficiency, and ensure safe operation. Following the manufacturer's instructions, a yearly tune-up should: check for gas / carbon monoxide leaks; change the air and fuel filters; check components for cracks, corrosion, dirt, or debris build-up; ensure the ignition system is working properly; test and adjust operation and safety controls; inspect electrical connections; and lubricate motors and bearings.

Water Heater Maintenance


Preventative maintenance can extend the life of the system, maintain energy efficiency, and ensure safe operation. At least once a year, follow manufacturer instructions to drain a few gallons out of the water heater using the drain valve. If there is a lot of sediment or debris, then a full flush is recommended. Turn the temperature down and then completely drain the tank. Annual checks should include checks for:

- Leaks or heavy corrosion on the pipes and valves.
- Corrosion or wear on the gas line and on the piping. If you noticed any black residue, soot, or charred metal, this is a sign you may be having combustion issues and you should have the unit serviced by a professional.
- For electric water heaters, look for signs of leaking such as rust streaks or residue around the upper and lower panels covering the electrical components on the tank.
- For water heaters more than three years old, have a technician inspect the sacrificial anode annually.





Plug Load Controls



Reducing plug loads is a common way to decrease your electrical use. Limiting the energy use of plug loads can include increasing occupant awareness, removing under-used equipment, installing hardware controls, and using software controls. Consider enabling the most aggressive power settings on existing devices or install load sensing or occupancy sensing (advanced) power strips⁵. Your local utility may offer incentives or rebates for this equipment.

Water Conservation



Installing dual flush or low-flow toilets and low-flow/waterless urinals are ways to reduce water use. The EPA WaterSense™ ratings for urinals is 0.5 gallons per flush (gpf) and for flush valve toilets is 1.28 gpf (this is lower than the current 1.6 gpf federal standard).

For more information regarding water conservation go to the EPA's WaterSense™ website⁶ or download a copy of EPA's "WaterSense™ at Work: Best Management

Practices for Commercial and Institutional Facilities"⁷ to get ideas for creating a water management plan and best practices for a wide range of water using systems.

Water conservation devices that do not reduce hot water consumption will not provide energy savings at the site level, but they may significantly affect your water and sewer usage costs. Any reduction in water use does however ultimately reduce grid-level electricity use since a significant amount of electricity is used to deliver water from reservoirs to end users.

If the facility has detached buildings with a master water meter for the entire campus, check for unnatural wet areas in the lawn or water seeping in the foundation at water pipe penetrations through the foundation. Periodically check overnight meter readings when the Elementary School is unoccupied, and there is no other scheduled water usage.

Manage irrigation systems to use water more effectively outside the building. Adjust spray patterns so that water lands on intended lawns and plantings and not on pavement and walls. Consider installing an evapotranspiration irrigation controller that will prevent over-watering.

Procurement Strategies

Purchasing efficient products reduces energy costs without compromising quality. Consider modifying your procurement policies and language to require ENERGY STAR® or WaterSense™ products where available.

⁵ For additional information refer to "Assessing and Reducing Plug and Process Loads in Office Buildings" http://www.nrel.gov/docs/fy13osti/54175.pdf, or "Plug Load Best Practices Guide" http://www.advancedbuildings.net/plug-load-best-practices-guide-offices.

⁶ https://www.epa.gov/watersense

⁷ https://www.epa.gov/watersense/watersense-work-0





6 ON-SITE GENERATION

You don't have to look far in New Jersey to see one of the thousands of solar electric systems providing clean power to homes, businesses, schools, and government buildings. On-site generation includes both renewable (e.g., solar, wind) and non-renewable (e.g., fuel cells) technologies that generate power to meet all or a portion of the Elementary School's electric energy needs. Also referred to as distributed generation, these systems contribute to greenhouse gas (GHG) emission reductions, demand reductions and reduced customer electricity purchases, which results in improved electric grid reliability through better use of transmission and distribution systems.

Preliminary screenings were performed to determine if an on-site generation measure could be a cost-effective solution for your facility. Before deciding to install an on-site generation system, we recommend conducting a feasibility study to analyze existing energy profiles, siting, interconnection, and the costs associated with the generation project including interconnection costs, departing load charges, and any additional special facilities charges.






6.1 Solar Photovoltaic

Photovoltaic (PV) panels convert sunlight into electricity. Individual panels are combined into an array that produces direct current (DC) electricity. The DC current is converted to alternating current (AC) through an inverter. The inverter is then connected to the building's electrical distribution system.

A preliminary screening based on the facility's electric demand, size and location of free area, and shading elements shows that the facility has **high** potential for installing a PV array.

The amount of free area, ease of installation (location), and the lack of shading elements contribute to the high potential. A PV array located on the roof may be feasible. If you are interested in expanding the installation of PV, we recommend conducting a full feasibility study.

The graphic below displays the results of the expansion PV potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

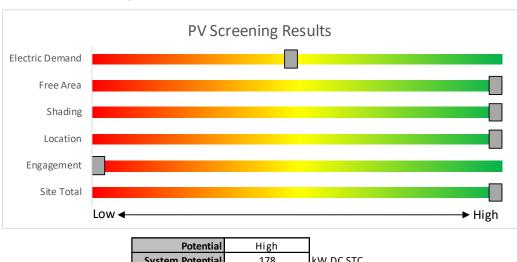

Potential	High	
System Potential	178	kW DC STC
Electric Generation	212,064	kWh/yr
Displaced Cost	\$25,680	/yr
Installed Cost	\$462,800	

Figure 9 - Photovoltaic Screening

Solar Renewable Energy Certificate (SREC) Registration Program (SRP)

Rebates are not available for solar projects, but owners of solar projects MUST register their projects in the SREC Registration Program before starting construction. Once your PV system is up and running, you periodically earn credits, which can then be sold on the open market for up to 15 years.

If you are considering installing solar photovoltaics on your building, visit www.njcleanenergy.com/srec for more information about the SREC Registration Program.

Get more information about solar power in New Jersey or find a qualified solar installer who can help you decide if solar is right for your building:

- Basic Info on Solar PV in New Jersey: www.njcleanenergy.com/whysolar
- **New Jersey Solar Market FAQs**: <u>www.njcleanenergy.com/renewable-energy/program-updates-and-background-information/solar-transition/solar-market-faqs</u>
- Approved Solar Installers in the New Jersey Market: www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/?id=60&start=1





6.2 Combined Heat and Power

Combined heat and power (CHP) generate electricity at the Elementary School and puts waste heat energy to good use. Common types of CHP systems are reciprocating engines, microturbines, fuel cells, backpressure steam turbines, and (at large facilities) gas turbines.


CHP systems typically produce a portion of the electric power used on-site, with the balance of electric power needs supplied by the local utility company. The heat is used to supplement (or replace) existing boilers and provide space heating and/or domestic hot water heating. Waste heat can also be routed through absorption chillers for space cooling.

The key criteria used for screening is the amount of time that the CHP system would operate at full load and the facility's ability to use the recovered heat. Facilities with a continuous need for large quantities of waste heat are the best candidates for CHP.

A preliminary screening based on heating and electrical demand, siting, and interconnection shows that the facility has **no** potential for installing a cost-effective CHP system.

Based on a preliminary analysis, the facility does not appear to meet the minimum requirements for a cost-effective CHP installation. The lack of gas service, low or infrequent thermal load, and lack of space for siting the equipment are the most significant factors contributing to the lack of CHP potential.

The graphic below displays the results of the CHP potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

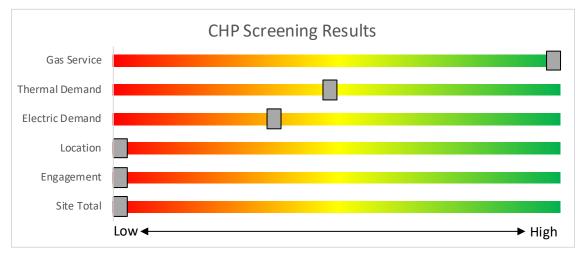

Potential	None	
System Type	None	
System Potential	100	kW
Electric Generation	214,600	kWh/yr
Thermal Generation	1,255,410	MBtu/yr
Displaced Cost	\$14,104	/yr
Installed Cost	\$365,000	

Figure 10 - Combined Heat and Power Screening

Find a qualified firm that specializes in commercial CHP cost assessment and installation: http://www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved vendorsearch/.





7 Project Funding and Incentives

Ready to improve your building's performance? Pick the program that works best for you. Incentive programs that may apply to this facility are identified in the Executive Summary. This section provides an overview of currently available New Jersey's Clean Energy Programs.

	SmartStart Flexibility to install at your own pace	Direct Install Turnkey installation	Pay for Performance Whole building upgrades
Who should use it?	Buildings installing individual measures or small group of measures.	Small to mid-size facilities that can bundle multiple measures together.	Mid to large size facilities looking to implement as many measures as possible at one time.
		Average peak demand should be below 200 kW.	Peak demand should be over 200 kW.
		Not suitable for significant building shell issues.	
How does it work?	Use in-house staff or your preferred contractor.	Pre-approved contractors pass savings along to you via reduced material and labor costs.	Whole-building approach to energy upgrades designed to reduce energy use by at least 15%. The more you save, the higher the incentives.
What are the Incentives?	Fixed incentives for specific energy efficiency measures.	Incentives pay up to 70% of eligible costs, up to \$125,000 per project.	Up to 25% of installation cost, calculated based on level of energy savings per
		You pay the remaining 30% directly to the contractor.	square foot.
How do I participate?	Submit an application for the specific equipment to be installed.	Contact a participating contractor in your region.	Contact a pre-qualified Partner to develop your Energy Reduction Plan and set your energy savings targets.

Take the next step by visiting **www.njcleanenergy.com** for program details, applications, and to contact a qualified contractor.





7.1 SmartStart



SmartStart offers incentives for installing prescriptive and custom energy efficiency measures at the Elementary School. This program provides an effective mechanism for securing incentives for energy efficiency measures installed individually or as part of a package of energy upgrades. This program serves most common equipment types and sizes.

SmartStart routinely adds, removes, or modifies incentives from year-to-year for various energy efficient equipment based on market trends and new technologies.

Equipment with Prescriptive Incentives Currently Available:

Electric Chillers
Electric Unitary HVAC
Gas Cooling
Gas Heating
Gas Water Heating
Ground Source Heat Pumps
Lighting

Lighting Controls
Refrigeration Doors
Refrigeration Controls
Refrigerator/Freezer Motors
Food Service Equipment
Variable Frequency Drives

Incentives

The SmartStart Prescriptive program provides fixed incentives for specific energy efficiency measures. Prescriptive incentives vary by equipment type.

SmartStart Custom provides incentives for more unique or specialized technologies or systems that are not addressed through prescriptive incentives. Custom incentives are calculated at \$0.16/kWh and \$1.60/therm based on estimated annual savings. Incentives are capped at 50% of the total installed incremental project cost, or a project cost buy down to a one-year payback (whichever is less). Program incentives are capped at \$500,000 per electric account and \$500,000 per natural gas account, per fiscal year.

How to Participate

Submit an application for the specific equipment to be installed. Many applications are designed as rebates, although others require application approval prior to installation. You can work with your preferred contractor or use internal staff to install measures.

Visit <u>www.njcleanenergy.com/SSB</u> for a detailed program description, instructions for applying, and applications.





7.2 Direct Install



Direct Install is a turnkey program available to existing small to medium-sized facilities with an average peak electric demand that does not exceed 200 kW over the recent 12-month period. You work directly with a preapproved contractor who will perform a free energy assessment at your facility, identify specific eligible measures, and provide a clear scope of work for

installation of selected measures. Energy efficiency measures may include lighting and lighting controls, refrigeration, HVAC, motors, variable speed drives, and controls.

Incentives

The program pays up to 70% of the total installed cost of eligible measures, up to \$125,000 per project. Each entity is limited to incentives up to \$250,000 per fiscal year.

How to Participate

To participate in Direct Install, you will need to contact the participating contractor assigned to the region of the state where the Elementary School is located. A complete list of Direct Install program partners is provided on the Direct Install website linked below. The contractor will be paid the measure incentives directly by the program, which will pass on to you in the form of reduced material and implementation costs. This means up to 70% of eligible costs are covered by the program, subject to program caps and eligibility, while the remaining 30% of the cost is paid to the contractor by the customer.

Detailed program descriptions and applications can be found at: www.njcleanenergy.com/DI.





7.3 Pay for Performance - Existing Buildings



Pay for Performance works for larger customers with a peak demand over 200 kW. The minimum installed scope of work must include at least two unique measures that results in at least 15% source energy savings, and lighting cannot make up the majority of the savings. P4P is a generally a good option for medium-to-large sized facilities looking to implement as many

measures as possible under a single project to achieve deep energy savings. This program has an added benefit of addressing measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program loan also use this program.

The scope of work presented in this audit report does not quite meet the requirements of the current P4P program. However, due to the size of the facility and existing conditions, should additional measures be identified at a later point in time, for example through further evaluation or the Energy Savings Improvement Program process, this facility could potentially meet the requirements necessary to participate in the P4P program.

Incentives

Incentives are based on estimated and achieved energy savings ranging from \$0.18-\$0.22/kWh and \$1.80-\$2.50/therm, capped at the lesser of 50% total project cost, or \$1 million per electric account and \$1 million per natural gas account, per fiscal year, not to exceed \$2 million per project. An incentive of \$0.15/square foot is also available to offset the cost of developing the Energy Reduction Plan (see below) contingent on the project moving forward with measure installation.

How to Participate

Contact one of the pre-approved consultants and contractors ("Partners"). Under direct contract to you, they will help further evaluate the measures identified in this report through development of the energy reduction plan, assist you in implementing selected measures, and verify actual savings one year after the installation. Your Partner will also help you apply for incentives.

Approval of the final scope of work is required by the program prior to installation. Installation can be done by the contractor of your choice (some P4P Partners are also contractors) or by internal staff, but the Partner remains involved throughout construction to ensure compliance with the program requirements.

Detailed program descriptions, instructions for applying, applications and list of Partners can be found at: www.njcleanenergy.com/P4P.





7.4 Combined Heat and Power

The Combined Heat & Power (CHP) program provides incentives for eligible CHP or waste heat to power (WHP) projects. Eligible CHP or WHP projects must achieve an annual system efficiency of at least 65% (lower heating value, or LHV), based on total energy input and total utilized energy output. Mechanical energy may be included in the efficiency evaluation.

Incentives

Eligible Technologies	Size (Installed Rated Capacity) ¹	Incentive (\$/kW)	% of Total Cost Cap per Project ³	\$ Cap per Project ³
Powered by non- renewable or renewable fuel source ⁴	≤500 kW	\$2,000	30-40% ²	\$2 million
Gas Internal Combustion Engine	>500 kW - 1 MW	\$1,000		
Gas Combustion Turbine	> 1 MW - 3 MW	\$550		
Microturbine Fuel Cells with Heat Recovery	>3 MW	\$350	30%	\$3 million
		201500		225-56-5
Waste Heat to Power*	<1 MW	\$1,000	30%	\$2 million
Total Control	> 1MW	\$500		\$3 million

[&]quot;Waste Heat to Power: Powered by non-renewable fuel source, heat recovery or other mechanical recovery from existing equipment utilizing new electric generation equipment (e.g. steam turbine).

Check the NJCEP website for details on program availability, current incentive levels, and requirements.

How to Participate

You work with a qualified developer or consulting firm to complete the CHP application. Once the application is approved the project can be installed. Information about the CHP program can be found at: www.njcleanenergy.com/CHP.





7.5 Energy Savings Improvement Program

The Energy Savings Improvement Program (ESIP) serves New Jersey's government agencies by financing energy projects. An ESIP is a type of performance contract, whereby school districts, counties, municipalities, housing authorities and other public and state entities enter in to contracts to help finance building energy upgrades. Annual payments are lower than the savings projected from the ECMs, ensuring that ESIP projects are cash flow positive for the life of the contract.

ESIP provides government agencies in New Jersey with a flexible tool to improve and reduce energy usage with minimal expenditure of new financial resources. NJCEP incentive programs described above can also be used to help further reduce the total project cost of eligible measures.

How to Participate

This LGEA report is the first step to participating in ESIP. Next, you will need to select an approach for implementing the desired ECMs:

- (1) Use an energy services company or "ESCO."
- (2) Use independent engineers and other specialists, or your own qualified staff, to provide and manage the requirements of the program through bonds or lease obligations.
- (3) Use a hybrid approach of the two options described above where the ESCO is used for some services and independent engineers, or other specialists or qualified staff, are used to deliver other requirements of the program.

After adopting a resolution with a chosen implementation approach, the development of the energy savings plan (ESP) can begin. The ESP demonstrates that the total project costs of the ECMs are offset by the energy savings over the financing term, not to exceed 15 years. The verified savings will then be used to pay for the financing.

The ESIP approach may not be appropriate for all energy conservation and energy efficiency improvements. Carefully consider all alternatives to develop an approach that best meets your needs. A detailed program descriptions and application can be found at: www.njcleanenergy.com/ESIP.

ESIP is a program delivered directly by the NJBPU and is not an NJCEP incentive program. As mentioned above, you can use NJCEP incentive programs to help further reduce costs when developing the energy savings plan. Refer to the ESIP guidelines at the link above for further information and guidance on next steps.





7.6 SREC Registration Program

The SREC (Solar Renewable Energy Certificate) Registration Program (SRP) is used to register the intent to install solar projects in New Jersey. Rebates are not available for solar projects, but owners of solar projects *must* register their projects prior to the start of construction to establish the project's eligibility to earn SRECs. Registration of the intent to participate in New Jersey's solar marketplace provides market participants with information about the pipeline of anticipated new solar capacity and insight into future SREC pricing.

After the registration is accepted, construction is complete, and final paperwork has been submitted and is deemed complete, the project is issued a New Jersey certification number, which enables it to generate New Jersey SRECs. SREC's are generated once the solar project has been authorized to be energized by the Electric Distribution Company (EDC).

Each time a solar installation generates 1,000 kilowatt-hours (kWh) of electricity, an SREC is earned. Solar project owners report the energy production to the SREC Tracking System. This reporting allows SREC's to be placed in the customer's electronic account. SRECs can then be sold on the SREC Tracking System, providing revenue for the first 15 years of the project's life.

Electricity suppliers, the primary purchasers of SRECs, are required to pay a Solar Alternative Compliance Payment (SACP) if they do not meet the requirements of New Jersey's Solar Renewable Portfolio Standard. Purchasing SRECs can help them meet those requirements. As SRECs are traded in a competitive market, the price may vary significantly. The actual price of an SREC during a trading period fluctuates depending on supply and demand.

Information about the SRP can be found at: www.njcleanenergy.com/srec.





8 ENERGY PURCHASING AND PROCUREMENT STRATEGIES

8.1 Retail Electric Supply Options

Energy deregulation in New Jersey has increased energy buyers' options by separating the function of electricity distribution from that of electricity supply. So, though you may choose a different company from which to buy your electric power, responsibility for the Elementary School's interconnection to the grid and repair to local power distribution will still reside with the traditional utility company serving your region.

If your facility is not purchasing electricity from a third-party supplier, consider shopping for a reduced rate from third-party electric suppliers. If your facility already buys electricity from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party electric suppliers is available at the NJBPU website⁸.

8.2 Retail Natural Gas Supply Options

The natural gas market in New Jersey is also deregulated. Most customers that remain with the utility for natural gas service pay rates that are market-based and that fluctuate monthly. The utility provides basic gas supply service (BGSS) to customers who choose not to buy from a third-party supplier for natural gas commodity.

A customer's decision about whether to buy natural gas from a retail supplier typically depends on whether a customer prefers budget certainty and/or longer-term rate stability. Customers can secure longer-term fixed prices by signing up for service through a third-party retail natural gas supplier. Many larger natural gas customers may seek the assistance of a professional consultant to assist in their procurement process.

If your facility does not already purchase natural gas from a third-party supplier, consider shopping for a reduced rate from third-party natural gas suppliers. If your facility already purchases natural gas from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party natural gas suppliers is available at the NJBPU website⁹.

⁸ www.state.nj.us/bpu/commercial/shopping.html

⁹ www.state.nj.us/bpu/commercial/shopping.html





APPENDIX A: EQUIPMENT INVENTORY & RECOMMENDATIONS

Lighting Inventory & Recommendations

<u></u>		g Conditions	<u> </u>				Proposed Conditions									Energy Impact & Financial Analysis								
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years			
Boilerroom	11	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	11	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.3	909	0	\$108	\$402	\$110	2.7			
Boilerroom	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			
Custodian lounge	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	5	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.2	526	0	\$62	\$453	\$85	5.9			
Kitchen office	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.1	210	0	\$25	\$189	\$40	6.0			
Kitchen	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	2,277	2	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	2,277	0.1	248	0	\$29	\$110	\$30	2.7			
Kitchen	11	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	11	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.3	909	0	\$108	\$402	\$110	2.7			
Kitchen restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.0	83	0	\$10	\$37	\$10	2.7			
Serving line	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.2	631	0	\$75	\$489	\$95	5.3			
Custodian sink	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.0	83	0	\$10	\$37	\$10	2.7			
Cafeteria	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.0	165	0	\$20	\$73	\$20	2.7			
Cafeteria	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	5	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.1	413	0	\$49	\$183	\$50	2.7			
Cafeteria	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			
Café mech room	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	2,277	2	Relamp	No	4	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.1	331	0	\$39	\$146	\$40	2.7			
MPR	24	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Occupanc y Sensor	S	114	1,571	2	Relamp	No	24	LED - Linear Tubes: (4) 4' Lamps	Occupanc y Sensor	58	1,571	1.0	2,323	0	\$276	\$1,753	\$480	4.6			
MPR	4	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	4	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			
MPR stage	12	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,277	2, 3	Relamp	Yes	12	LED - Linear Tubes: (4) 4' Lamps	Occupanc y Sensor	58	1,571	0.6	2,224	0	\$264	\$1,146	\$275	3.3			
Music room stage	10	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	10	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.2	827	0	\$98	\$365	\$100	2.7			
Music room stage	10	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	10	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.2	827	0	\$98	\$365	\$100	2.7			
Music room stage	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			
Music storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	400	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	276	0.1	37	0	\$4	\$189	\$20	38.5			
MPR storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	400	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	276	0.1	37	0	\$4	\$189	\$20	38.5			
MPR office	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.1	210	0	\$25	\$189	\$40	6.0			
MPR storage	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	400	2, 3	Relamp	Yes	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	276	0.1	83	0	\$10	\$280	\$45	23.8			
Hall by cafeteria	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.0	165	0	\$20	\$73	\$20	2.7			
Hall by cafeteria	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			





	Existin	g Conditions					Proposed Conditions E									Energy Impact & Financial Analysis								
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years			
Hall by gym	15	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	2,277	2, 4	Relamp	Yes	15	LED Lamps: 4 pin - 2 lamps	High/Low Control	36	1,571	0.3	1,010	0	\$120	\$1,265	\$30	10.3			
Music Room 1	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,571	2	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.1	342	0	\$41	\$219	\$60	3.9			
Music Room 1	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	2,277	2, 3	Relamp	Yes	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.1	473	0	\$56	\$280	\$65	3.8			
Tech office	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	2,277	2	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	2,277	0.0	124	0	\$15	\$55	\$15	2.7			
Book storage	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	400	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	276	0.1	55	0	\$7	\$226	\$30	29.7			
Boys restroom	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.1	421	0	\$50	\$416	\$75	6.8			
Girls restroom	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.1	421	0	\$50	\$416	\$75	6.8			
Hall by restroom	8	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	s	52	2,277	2, 4	Relamp	Yes	8	LED Lamps: 4 pin - 2 lamps	High/Low Control	36	1,571	0.2	539	0	\$64	\$660	\$16	10.1			
Main entrance	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.0	165	0	\$20	\$73	\$20	2.7			
Main entrance	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			
Main lobby	18	Compact Fluores cent: 4 pin - 2 lamps	Wall Switch	s	52	2,277	2, 3	Relamp	Yes	18	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.3	1,212	0	\$144	\$1,518	\$106	9.8			
Main lobby	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			
Main office	11	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	11	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.4	941	0	\$112	\$602	\$165	3.9			
Conference room	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.1	171	0	\$20	\$110	\$30	3.9			
Work room	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.1	171	0	\$20	\$110	\$30	3.9			
Office 1	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.1	171	0	\$20	\$110	\$30	3.9			
Principal office	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.1	171	0	\$20	\$110	\$30	3.9			
Storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	400	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	400	0.0	29	0	\$3	\$73	\$20	15.4			
MO restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,571	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.0	57	0	\$7	\$37	\$10	3.9			
Teachers lounge	6	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	5	93	1,571	2	Relamp	No	6	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.2	513	0	\$61	\$329	\$90	3.9			
Teachers lounge	5	Compact Fluores cent: 4 pin - 2 lamps	Occupanc y Sensor	S	52	1,571	2	Relamp	No	5	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.1	135	0	\$16	\$272	\$10	16.3			
Men's faculty	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,571	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.0	57	0	\$7	\$37	\$10	3.9			
Women's faculty	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,571	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.0	57	0	\$7	\$37	\$10	3.9			
Nurse's office	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,571	2	Relamp	No	5	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.1	285	0	\$34	\$183	\$50	3.9			
Nurse's office	4	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Occupanc y Sensor	S	33	1,571	2	Relamp	No	4	LED - Linear Tubes: (2) 2' Lamps	Occupanc y Sensor	17	1,571	0.0	111	0	\$13	\$130	\$24	8.1			





	Existing	g Conditions					Proposed Conditions									Energy Impact & Financial Analysis								
Location	Fixture Quantit y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years			
Restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,571	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.0	57	0	\$7	\$37	\$10	3.9			
Nurse Exam room	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,571	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.0	114	0	\$14	\$73	\$20	3.9			
Nurse storage	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	400	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	400	0.0	15	0	\$2	\$37	\$10	15.4			
Elevator machine room	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	400	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	400	0.0	15	0	\$2	\$37	\$10	15.4			
Elevator machine room	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	None	S	62	400	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	None	29	400	0.0	29	0	\$3	\$73	\$20	15.4			
Hall by Nurse office	14	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	2,277	2, 4	Relamp	Yes	14	LED Lamps: 4 pin - 2 lamps	High/Low Control	36	1,571	0.3	943	0	\$112	\$993	\$28	8.6			
Network room	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.1	316	0	\$37	\$226	\$50	4.7			
500 A SGI	5	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	5	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.2	428	0	\$51	\$274	\$75	3.9			
Girls restroom	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	5	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.2	526	0	\$62	\$453	\$85	5.9			
Custodian closet	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	400	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	400	0.0	15	0	\$2	\$37	\$10	15.4			
Boys restroom	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	5	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.2	526	0	\$62	\$453	\$85	5.9			
500 B SGI	5	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	5	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.2	428	0	\$51	\$274	\$75	3.9			
Behaviour room 5000	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.1	171	0	\$20	\$110	\$30	3.9			
Hall by 500/502	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 4	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	1,571	0.1	421	0	\$50	\$371	\$40	6.6			
Hall by 500/502	6	Linear Fluorescent - T8: 4' T8 (32W) - 1L	Wall Switch	S	32	2,277	2, 4	Relamp	Yes	6	LED - Linear Tubes: (1) 4' Lamp	High/Low Control	15	1,571	0.1	331	0	\$39	\$335	\$30	7.8			
502 Pre-K room	13	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	13	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.5	1,112	0	\$132	\$712	\$195	3.9			
502 Pre-K room	7	Compact Fluores cent: 4 pin - 2 lamps	Occupanc y Sensor	S	52	1,571	2	Relamp	No	7	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.1	189	0	\$22	\$381	\$14	16.3			
502 Pre-K room	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			
502 Restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.0	83	0	\$10	\$37	\$10	2.7			
501 CR	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9			
501 CR	3	Compact Fluorescent: 4 pin - 2 lamps	Occupanc y Sensor	S	52	1,571	2	Relamp	No	3	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.0	81	0	\$10	\$163	\$6	16.3			
504 CR	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9			
504 CR	3	Compact Fluorescent: 4 pin - 2 lamps	Occupanc y Sensor	S	52	1,571	2	Relamp	No	3	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.0	81	0	\$10	\$163	\$6	16.3			
503 CR	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9			
503 CR	3	Compact Fluorescent: 4 pin - 2 lamps	Occupanc y Sensor	S	52	1,571	2	Relamp	No	3	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.0	81	0	\$10	\$163	\$6	16.3			





	Existing	g Conditions					Proposed Conditions									Energy Impact & Financial Analysis								
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years			
503 CR	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			
503 Kiln room	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	2,277	2	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	2,277	0.0	124	0	\$15	\$55	\$15	2.7			
503 A storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	400	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	276	0.1	37	0	\$4	\$189	\$20	38.5			
505 A class	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	2,277	2, 3	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	1,571	0.1	316	0	\$37	\$226	\$50	4.7			
Hall by 505A	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 4	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	1,571	0.1	316	0	\$37	\$226	\$30	5.2			
506 Pre-K room	13	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	s	93	1,571	2	Relamp	No	13	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	1,571	0.5	1,112	0	\$132	\$712	\$195	3.9			
506 Pre-K room	7	Compact Fluorescent: 4 pin - 2 lamps	Occupanc y Sensor	S	52	1,571	2	Relamp	No	7	LED Lamps: 4 pin - 2 lamps	Occupano y Sensor	36	1,571	0.1	189	0	\$22	\$381	\$14	16.3			
506 Pre-K room	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			
506 Restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.0	83	0	\$10	\$37	\$10	2.7			
508 Pre-K room	13	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	13	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	1,571	0.5	1,112	0	\$132	\$712	\$195	3.9			
508 Pre-K room	7	Compact Fluorescent: 4 pin - 2 lamps	Occupanc y Sensor	S	52	1,571	2	Relamp	No	7	LED Lamps: 4 pin - 2 lamps	Occupano y Sensor	36	1,571	0.1	189	0	\$22	\$381	\$14	16.3			
508 Pre-K room	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			
508 Restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.0	83	0	\$10	\$37	\$10	2.7			
505 CR	24	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	24	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	1,571	0.9	2,053	0	\$244	\$1,315	\$360	3.9			
505 CR	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			
507 CR	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9			
507 CR	3	Compact Fluores cent: 4 pin - 2 lamps	Occupanc y Sensor	S	52	1,571	2	Relamp	No	3	LED Lamps: 4 pin - 2 lamps	Occupano y Sensor	36	1,571	0.0	81	0	\$10	\$163	\$6	16.3			
510 A split room	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9			
509 A split room	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9			
Hall by 509/510	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 4	Relamp	Yes	5	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	1,571	0.2	526	0	\$62	\$408	\$50	5.7			
Hall by 509/510	8	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	2,277	2, 4	Relamp	Yes	8	LED Lamps: 4 pin - 2 lamps	High/Low Control	36	1,571	0.2	539	0	\$64	\$660	\$16	10.1			
Hall by 509/510	8	Linear Fluorescent - T8: 4' T8 (32W) - 1L	Wall Switch	S	32	2,277	2, 4	Relamp	Yes	8	LED - Linear Tubes: (1) 4' Lamp	High/Low Control	15	1,571	0.1	441	0	\$52	\$371	\$40	6.3			
512 Pre-K	13	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,571	2	Relamp	No	13	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	1,571	0.3	741	0	\$88	\$475	\$130	3.9			
512 Pre-K	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Occupanc y Sensor	S	33	1,571	2	Relamp	No	1	LED - Linear Tubes: (2) 2' Lamps	Occupano y Sensor	17	1,571	0.0	28	0	\$3	\$33	\$6	8.1			
512 restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.0	83	0	\$10	\$37	\$10	2.7			





-	Existing	g Conditions					Proposed Conditions									Energy Impact & Financial Analysis								
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years			
511 CR	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,571	2	Relamp	No	15	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.4	855	0	\$102	\$548	\$150	3.9			
514 Pre-K	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,571	2	Relamp	No	15	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.4	855	0	\$102	\$548	\$150	3.9			
514 Pre-K	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			
513 CR	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,571	2	Relamp	No	15	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.4	855	0	\$102	\$548	\$150	3.9			
Women's restroom	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.1	316	0	\$37	\$380	\$65	8.4			
Women restroom	1	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	2,277	2	Relamp	No	1	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	2,277	0.0	39	0	\$5	\$54	\$2	11.3			
DHW room	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	400	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	400	0.0	15	0	\$2	\$37	\$10	15.4			
Electric room	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	400	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	400	0.0	15	0	\$2	\$37	\$10	15.4			
Men's restroom	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.1	316	0	\$37	\$380	\$65	8.4			
515 CR	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,571	2	Relamp	No	15	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.4	855	0	\$102	\$548	\$150	3.9			
516 CR	9	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,571	2	Relamp	No	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.2	513	0	\$61	\$329	\$90	3.9			
Hall by electrical closet	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 4	Relamp	Yes	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	1,571	0.2	736	0	\$87	\$481	\$70	4.7			
Hall by electrical closet	6	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	2,277	2, 4	Relamp	Yes	6	LED Lamps: 4 pin - 2 lamps	High/Low Control	36	1,571	0.1	404	0	\$48	\$551	\$12	11.2			
Hall by electrical closet	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			
Back stair	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	8	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.2	661	0	\$79	\$292	\$80	2.7			
Back stair	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			
Stairwell 3	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	7	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.2	579	0	\$69	\$256	\$70	2.7			
Stairwell 3	2	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	2,277	2	Relamp	No	2	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	2,277	0.0	78	0	\$9	\$109	\$4	11.3			
Stairwell 3	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			
Stairwell 2	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	7	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.2	579	0	\$69	\$256	\$70	2.7			
Stairwell 2	2	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	2,277	2	Relamp	No	2	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	2,277	0.0	78	0	\$9	\$109	\$4	11.3			
Stairwell 2	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			
10 Vestibule	2	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	2,277	2	Relamp	No	2	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	2,277	0.0	78	0	\$9	\$109	\$4	11.3			
Stairwell 1	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	7	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.2	579	0	\$69	\$256	\$70	2.7			
Stairwell 1	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0			





	Existing Conditions						Prop	osed Conditio	ons						Energy Ir	npact & F	inancial <i>A</i>	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Library men room	11	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	11	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.3	1,157	0	\$137	\$672	\$145	3.8
Library	40	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	2,277	2, 3	Relamp	Yes	40	LED - Linear Tubes: (4) 4' Lamps	Occupanc y Sensor	58	1,571	2.1	7,412	-2	\$881	\$3,461	\$870	2.9
Library	1	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	2,277	2	Relamp	No	1	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	2,277	0.0	39	0	\$5	\$54	\$2	11.3
Library	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Library computer lab	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.1	210	0	\$25	\$189	\$40	6.0
Library computer lab	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	2,277	2, 3	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.1	316	0	\$37	\$226	\$50	4.7
Li bra ry office	6	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	6	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.2	513	0	\$61	\$329	\$90	3.9
Library vestibule	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	2,277	2	Relamp	No	3	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.1	248	0	\$29	\$110	\$30	2.7
Mech room	9	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	400	2	Relamp	No	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	400	0.2	131	0	\$16	\$329	\$90	15.4
Men's faculty	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.0	83	0	\$10	\$37	\$10	2.7
Women's faculty	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.0	83	0	\$10	\$37	\$10	2.7
600 A class	9	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	2,277	2, 3	Relamp	Yes	9	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.4	1,420	0	\$169	\$763	\$170	3.5
600B storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	400	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	276	0.1	37	0	\$4	\$189	\$20	38.5
600 CR	9	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	9	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.3	770	0	\$92	\$493	\$135	3.9
600 CR	1	Compact Fluorescent: 4 pin - 2 lamps	Occupanc y Sensor	S	52	1,571	2	Relamp	No	1	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.0	27	0	\$3	\$54	\$2	16.3
Hall by library	8	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	2,277	2, 4	Relamp	Yes	8	LED Lamps: 4 pin - 2 lamps	High/Low Control	36	1,571	0.2	539	0	\$64	\$660	\$16	10.1
Hall by library	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	2,277	2, 4	Relamp	Yes	5	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	1,571	0.2	526	0	\$62	\$408	\$50	5.7
Hall by library	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
601 A CR	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9
Electrical closet	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	400	2	Relamp	No	3	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	400	0.1	44	0	\$5	\$110	\$30	15.4
Girls 2nd floor	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	5	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.2	526	0	\$62	\$453	\$85	5.9
Custodian 2nd floor	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,277	0.0	83	0	\$10	\$37	\$10	2.7
Boys 2nd floor	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	5	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.2	526	0	\$62	\$453	\$85	5.9
602 CR	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9
602 CR	3	Compact Fluorescent: 4 pin - 2 lamps	Occupanc y Sensor	S	52	1,571	2	Relamp	No	3	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.0	81	0	\$10	\$163	\$6	16.3





	Existin	g Conditions					Prop	osed Conditio	ns						Energy li	npact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
603 CR	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9
603 CR	3	Compact Fluorescent: 4 pin - 2 lamps	Occupanc y Sensor	S	52	1,571	2	Relamp	No	3	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.0	81	0	\$10	\$163	\$6	16.3
604 CR	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9
604 CR	3	Compact Fluores cent: 4 pin - 2 lamps	Occupanc y Sensor	S	52	1,571	2	Relamp	No	3	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.0	81	0	\$10	\$163	\$6	16.3
605 CR	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9
605 CR	3	Compact Fluorescent: 4 pin - 2 lamps	Occupanc y Sensor	s	52	1,571	2	Relamp	No	3	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.0	81	0	\$10	\$163	\$6	16.3
Hall by 602	6	Linear Fluorescent - T8: 4' T8 (32W) - 1L	Wall Switch	S	32	2,277	2, 4	Relamp	Yes	6	LED - Linear Tubes: (1) 4' Lamp	High/Low Control	15	1,571	0.1	331	0	\$39	\$335	\$30	7.8
Hall by 602	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 4	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	1,571	0.1	421	0	\$50	\$371	\$40	6.6
606 CR	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9
606 CR	3	Compact Fluorescent: 4 pin - 2 lamps	Occupanc y Sensor	s	52	1,571	2	Relamp	No	3	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.0	81	0	\$10	\$163	\$6	16.3
607 CR	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9
607 CR	3	Compact Fluorescent: 4 pin - 2 lamps	Occupanc y Sensor	S	52	1,571	2	Relamp	No	3	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.0	81	0	\$10	\$163	\$6	16.3
608 CR	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	s	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9
608 CR	3	Compact Fluores cent: 4 pin - 2 lamps	Occupanc y Sensor	s	52	1,571	2	Relamp	No	3	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.0	81	0	\$10	\$163	\$6	16.3
609 CR	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9
609 CR	3	Compact Fluorescent: 4 pin - 2 lamps	Occupanc y Sensor	S	52	1,571	2	Relamp	No	3	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.0	81	0	\$10	\$163	\$6	16.3
610 CR	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9
610 CR	3	Compact Fluorescent: 4 pin - 2 lamps	Occupanc y Sensor	S	52	1,571	2	Relamp	No	3	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.0	81	0	\$10	\$163	\$6	16.3
611 CR	12	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,571	2	Relamp	No	12	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,571	0.4	1,027	0	\$122	\$657	\$180	3.9
611 CR	3	Compact Fluorescent: 4 pin - 2 lamps	Occupanc y Sensor	S	52	1,571	2	Relamp	No	3	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.0	81	0	\$10	\$163	\$6	16.3
Hall by 610	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 4	Relamp	Yes	5	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	1,571	0.2	526	0	\$62	\$408	\$50	5.7
Hall by 610	2	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	s	52	2,277	2, 4	Relamp	Yes	2	LED Lamps: 4 pin - 2 lamps	High/Low Control	36	1,571	0.0	135	0	\$16	\$334	\$4	20.6
Hall by 610	8	Linear Fluorescent - T8: 4' T8 (32W) - 1L	Wall Switch	s	32	2,277	2, 4	Relamp	Yes	8	LED - Linear Tubes: (1) 4' Lamp	High/Low Control	15	1,571	0.1	441	0	\$52	\$371	\$40	6.3
Hall by 610	2	Exit Signs : LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs : LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
612 CR	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,571	2	Relamp	No	15	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.4	855	0	\$102	\$548	\$150	3.9





	Existin	g Conditions					Prop	osed Conditio	ns						Energy Ir	npact & F	inancial A	nalysis			
Location	Fixture Quantit y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
613 CR	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	s	62	1,571	2	Relamp	No	15	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.4	855	0	\$102	\$548	\$150	3.9
CR 614	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,571	2	Relamp	No	15	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.4	855	0	\$102	\$548	\$150	3.9
CR 615	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,571	2	Relamp	No	15	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.4	855	0	\$102	\$548	\$150	3.9
Women 2nd floor	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	2,277	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.1	316	0	\$37	\$380	\$65	8.4
Women 2nd floor	1	Compact Fluores cent: 4 pin - 2 lamps	Wall Switch	S	52	2,277	2, 3	Relamp	Yes	1	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.0	67	0	\$8	\$54	\$2	6.5
Electrical room	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	400	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	400	0.0	29	0	\$3	\$73	\$20	15.4
Men 2nd floor	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.1	316	0	\$37	\$380	\$65	8.4
Men 2nd floor	1	Compact Fluores cent: 4 pin - 2 lamps	Wall Switch	S	52	2,277	2, 3	Relamp	Yes	1	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	1,571	0.0	67	0	\$8	\$54	\$2	6.5
617 CR	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	15	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.5	1,578	0	\$187	\$818	\$185	3.4
616 SGI	9	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 3	Relamp	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,571	0.3	947	0	\$112	\$599	\$125	4.2
Hall by 614	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,277	2, 4	Relamp	Yes	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	1,571	0.2	736	0	\$87	\$481	\$70	4.7
Hall by 614	6	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	2,277	2, 4	Relamp	Yes	6	LED Lamps: 4 pin - 2 lamps	High/Low Control	36	1,571	0.1	404	0	\$48	\$551	\$12	11.2
Hall by 614	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Front door canopy	6	Compact Fluores cent: 4 pin - 2 lamps	Wall Switch		52	2,277	2	Relamp	No	6	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	2,277	0.0	213	0	\$26	\$326	\$12	12.2
Front door canopy	5	Compact Fluorescent: Circular fluorescent	Timecloc k		52	5,110	2	Relamp	No	5	LED Lamps: 4 pin - 2 lamps	Timecloc k	36	5,110	0.0	399	0	\$48	\$272	\$10	5.4
Wall pack	10	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Timecloc k		42	5,110		None	No	10	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Timecloc k	42	5,110	0.0	0	0	\$0	\$0	\$0	0.0
Wall mounted	3	Metal Halide: (1) 70W Lamp	Timecloc k		95	5,110	1	Fixture Replacement	No	3	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Timecloc k	29	5,110	0.1	1,019	0	\$123	\$2,898	\$300	21.0
Wall mounted	1	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Timecloc k		57	5,110		None	No	1	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Timecloc k	57	5,110	0.0	0	0	\$0	\$0	\$0	0.0
Wall pack	3	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell		42	4,380		None	No	3	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell	42	4,380	0.0	0	0	\$0	\$0	\$0	0.0
Wall mounted	1	Compact Fluores cent: 4 pin - 1 lamp	Other		26	2,000	2	Relamp	No	1	LED Lamps: 4 pin - 2 lamps	Other	18	2,000	0.0	16	0	\$2	\$54	\$2	27.7
Parking pole	28	Metal Halide: (1) 70W Lamp	Timecloc k		95	5,110	1	Fixture Replacement	No	28	LED - Fixtures: Outdoor Pole/Arm Mounted Area/Roadway Fixture	Timecloc k	29	5,110	0.9	9,515	0	\$1,152	\$26,056	\$2,800	20.2





Motor Inventory & Recommendations

	tory & Necon		g Conditions						Prop	osed Co	ndition	S		Energy In	npact & Fir	nancial An	alysis			
Location	Area(s)/System(s) Served	Motor Quantit y	Motor Application	HP Per Motor	Full Load Efficienc Y	VFD Control?	Remaining Useful Life	Annual Operating Hours	ECM #	Install High Efficienc y Motors?	Full Load Efficiency		Numbe r of VFDs	Total Peak kW Savings		Total Annual MMBtu Savings		Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Roof	AHU-1 Classrooms	1	Supply Fan	15.0	90.0%	No	W	2,745	5	No	93.0%	Yes	1	4.5	13,542	0	\$1,640	\$7,041	\$1,200	3.6
Roof	RTU-1 toilet rooms	1	Supply Fan	7.5	89.0%	No	W	2,745	5	No	91.0%	Yes	1	2.2	6,727	0	\$815	\$4,738	\$600	5.1
Roof	AHU-1 classrooms	1	Exhaust Fan	15.0	90.0%	No	w	2,745	5	No	93.0%	Yes	1	4.7	13,542	0	\$1,640	\$7,041	\$1,200	3.6
Roof	RTU-1 toilet rooms	1	Exhaust Fan	7.5	89.0%	No	W	2,745	5	No	91.0%	Yes	1	2.3	6,727	0	\$815	\$4,738	\$600	5.1
Roof	Pre-1	1	Exhaust Fan	0.2	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Pre-1	1	Exhaust Fan	0.2	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Pre-2	1	Exhaust Fan	0.3	60.0%	No	w	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Pre-3	1	Exhaust Fan	0.3	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Pre-4	1	Exhaust Fan	0.3	60.0%	No	w	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Pre-5	1	Exhaust Fan	0.3	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Pre-6	1	Exhaust Fan	0.2	60.0%	No	w	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Pre-7	1	Exhaust Fan	0.3	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Pre-8	1	Exhaust Fan	0.3	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Pre-9	1	Exhaust Fan	0.3	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTH-1	1	Exhaust Fan	0.2	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTH-2	1	Exhaust Fan	0.2	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTH-3	1	Exhaust Fan	0.2	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTH-4	1	Exhaust Fan	0.2	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTH-5	1	Exhaust Fan	0.2	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTH-6	1	Exhaust Fan	0.2	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0





-		Existin	g Conditions						Prop	osed Co	ndition	s		Energy In	npact & Fir	nancial An	alysis			
Location	Area(s)/System(s) Served	Motor Quantit Y	Motor Application	HP Per Motor	Full Load Efficienc Y	VFD Control?	Remaining Useful Life	Annual Operating Hours	ECM #	Install High Efficienc y Motors?	Full Load Efficiency		Numbe r of VFDs	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Roof	RTH-7	1	Exhaust Fan	0.2	60.0%	No	w	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTH-8	1	Exhaust Fan	0.2	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTH-9	1	Exhaust Fan	0.2	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTH-10	1	Exhaust Fan	0.2	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Mech room 103	UH-1	1	Supply Fan	0.1	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Vestibule 100	UH-2	1	Supply Fan	0.1	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Mech room 103	P-3,4	2	Heating Hot Water Pump	5.0	90.2%	Yes	w	2,745		No	90.2%	No		0.0	0	0	\$0	\$0	\$0	0.0
Mech room 103	OCW boosters	2	Water Supply Pump	1.5	80.0%	No	W	2,745		No	80.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Mech room 103	DHW boosters	3	Water Supply Pump	0.0	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Outdoor	Cooling tower	1	Cooling Tower Fan	7.5	89.5%	Yes	W	3,391		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	HRU-1	1	Exhaust Fan	2.0	86.5%	Yes	W	2,745		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	HRU-1	1	Supply Fan	1.5	86.5%	Yes	W	2,745		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	HRU-2	1	Exhaust Fan	2.0	86.5%	Yes	W	2,745		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	HRU-2	1	Supply Fan	1.5	86.5%	Yes	W	2,745		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Lower roof	HRU-3	1	Exhaust Fan	0.8	86.5%	Yes	W	2,745		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Lower roof	HRU-3	1	Supply Fan	0.8	86.5%	Yes	W	2,745		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Elevator machine	Hydraulic pump	1	Process Pump	30.0	74.0%	No	W	200		No	74.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
DHW water room	DHW boosters	1	Water Supply Pump	0.1	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Mech room 103	Boiler combustion fan	2	Combustion Air Fan	2.0	86.5%	No	w	2,745		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Mech room 103	P-5,6	2	Water-Source Heat Pump Circulation Pump	40.0	94.5%	Yes	w	1,750		No	94.5%	No		0.0	0	0	\$0	\$0	\$0	0.0





		Existin	g Conditions						Prop	osed Co	ndition	s		Energy In	npact & Fir	nancial An	alysis			
Location	Area(s)/System(s) Served	Motor Quantit Y	Motor Application		Full Load Efficienc Y	VFD	Remaining Useful Life	Annual Operating Hours	"	Install High Efficienc y Motors?	Full Load Efficiency	Install VFDs?	Numbe r of VFDs	Total Peak kW Savings	Total Annual kWh Savings			Installation		Simple Payback w/ Incentives in Years
Mech room 103	P-1,2	2	Heating Hot Water Pump	2.0	82.0%	Yes	W	2,745		No	82.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Ceiling	WSHP	46	Supply Fan	1.5	86.0%	No	В	2,745		No	86.0%	No		0.0	0	0	\$0	\$0	\$0	0.0





Electric HVAC Inventory & Recommendations

LICCUIC IIVA	ac inventory	G IN	commenda	LIUIIS																	
		Existin	g Conditions				Prop	osed Co	nditio	ıs					Energy In	npact & Fi	nancial An	alysis			
Location	Area(s)/System(s) Served	System Quantit y	System Type	Cooling Capacit y per Unit (Tons)	Heating Capacity per Unit (MBh)	Remaining Useful Life	ECM #	Install High Efficienc y System?	System Quantit y	System Type	Cooling Capacit y per Unit (Tons)	Heating Capacity per Unit (MBh)	Cooling Mode Efficiency (SEER/EER	Heating Mode Efficiency (COP)	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Classrooms/Office Ceilings	Corridor 101	1	Water Source HP	1.82	26.80	В	6	Yes	1	Water Source HP	1.82	26.80	14.00	4.80	0.2	421	0	\$51	\$5,050	\$147	96.1
Classrooms/Office Ceilings	Corridor 102 area A	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9
Classrooms/Office Ceilings	Corridor 102 area B	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9
Classrooms/Office Ceilings	Cafeteria	1	Water Source HP	8.92	129.00	В	6	Yes	1	Water Source HP	8.92	129.00	14.00	4.50	0.7	1,682	0	\$204	\$11,018	\$722	50.5
Classrooms/Office Ceilings	Faculty 108	1	Water Source HP	1.82	26.80	В	6	Yes	1	Water Source HP	1.82	26.80	14.00	4.80	0.2	421	0	\$51	\$5,050	\$147	96.1
Classrooms/Office Ceilings	Kitchen 107	1	Water Source HP	4.57	66.20	В	6	Yes	1	Water Source HP	4.57	66.20	14.00	4.80	0.5	1,259	0	\$152	\$12,694	\$370	80.8
Classrooms/Office Ceilings	Multipurpose 109B	1	Water Source HP	13.50	21.40	В	6	Yes	1	Water Source HP	13.50	21.40	14.00	4.50	1.9	2,335	0	\$283	\$16,681	\$1,094	55.1
Classrooms/Office Ceilings	Multipurpose	1	Water Source HP	13.50	21.40	В	6	Yes	1	Water Source HP	13.50	21.40	14.00	4.50	1.9	2,335	0	\$283	\$16,681	\$1,094	55.1
Classrooms/Office Ceilings	EC112	1	Water Source HP	1.46	21.60	В	6	Yes	1	Water Source HP	1.46	21.60	14.00	4.80	0.2	422	0	\$51	\$4,054	\$118	77.1
Classrooms/Office Ceilings	Platform 109C	1	Water Source HP	2.68	39.10	В	6	Yes	1	Water Source HP	2.68	39.10	14.00	4.80	0.2	593	0	\$72	\$7,435	\$217	100.5
Classrooms/Office Ceilings	117	1	Water Source HP	1.82	26.80	В	6	Yes	1	Water Source HP	1.82	26.80	14.00	4.80	0.2	421	0	\$51	\$5,050	\$147	96.1
Classrooms/Office Ceilings	11B, 117C, 117D, 117F	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9
Classrooms/Office Ceilings Classrooms/Office	Classroom 120	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9
Ceilings Classrooms/Office	Kindergarten 120	1	Water Source HP	3.55	49.10	В	6	Yes	1	Water Source HP	3.55	49.10	14.00	4.80	0.2	588	0	\$71	\$9,868	\$288	134.5
Ceilings Classrooms/Office	Classroom 122	1	Water Source HP	3.55	49.10	В	6	Yes	1	Water Source HP	3.55	49.10	14.00	4.80	0.2	588	0	\$71	\$9,868	\$288	134.5
Ceilings Classrooms/Office	Nurse 123	1	Water Source HP	2.29	31.20	В	6	Yes	1	Water Source HP	2.29	31.20	14.00	4.80	0.1	412	0	\$50	\$6,370	\$186	124.1
Cassrooms/Office Ceilings Classrooms/Office	Kindergarten 124	1	Water Source HP	3.55	49.10	В	6	Yes	1	Water Source HP	3.55	49.10	14.00	4.80	0.2	588	0	\$71	\$9,868	\$288	134.5
Ceilings Classrooms/Office	Classroom 126	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9
Ceilings Classrooms/Office	Kindergarten 126	1	Water Source HP	3.55	49.10	В	6	Yes	1	Water Source HP	3.55	49.10	14.00	4.80	0.2	588	0	\$71	\$9,868	\$288	134.5
Ceilings	BDI,SGI, 128	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9





-		Existin	g Conditions				Prop	osed Co	nditio	ns					Energy In	ıpact & Fii	nancial An	alysis			
Location	Area(s)/System(s) Served	System Quantit Y	System Type	Cooling Capacit y per Unit (Tons)	Heating Capacity per Unit (kBtu/hr	Remaining Useful Life	ECM #	Install High Efficienc y System?	System Quantit y	System Type	Cooling Capacit y per Unit (Tons)	Heating Capacity per Unit (kBtu/hr	Cooling Mode Efficiency (SEER/EER)	Heating Mode Efficiency (COP)	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Classrooms/Office Ceilings	Guidance	1	Water Source HP	0.90	129.00	В	6	Yes	1	Water Source HP	0.90	129.00	14.00	4.80	0.1	1,232	0	\$149	\$2,502	\$73	16.3
Classrooms/Office Ceilings	CSTI 31, Conference 131A	1	Water Source HP	1.46	21.60	В	6	Yes	1	Water Source HP	1.46	21.60	14.00	4.80	0.2	422	0	\$51	\$4,054	\$118	77.1
Classrooms/Office Ceilings	Classroom 133	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9
Classrooms/Office Ceilings	Art room 135	1	Water Source HP	3.55	49.10	В	6	Yes	1	Water Source HP	3.55	49.10	14.00	4.80	0.2	588	0	\$71	\$9,868	\$288	134.5
Classrooms/Office Ceilings	Network 137	1	Water Source HP	1.82	26.80	В	6	Yes	1	Water Source HP	1.82	26.80	14.00	4.80	0.2	421	0	\$51	\$5,050	\$147	96.1
Classrooms/Office Ceilings	Technology 139	1	Water Source HP	3.55	49.10	В	6	Yes	1	Water Source HP	3.55	49.10	14.00	4.80	0.2	588	0	\$71	\$9,868	\$288	134.5
Classrooms/Office Ceilings	Classroom 141,143A	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9
Classrooms/Office Ceilings	Research 143	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9
Classrooms/Office Ceilings	Corridor 200 area A	1	Water Source HP	2.29	31.20	В	6	Yes	1	Water Source HP	2.29	31.20	14.00	4.80	0.1	412	0	\$50	\$6,370	\$186	124.1
Classrooms/Office Ceilings	Corridor 200 area B	1	Water Source HP	2.29	31.20	В	6	Yes	1	Water Source HP	2.29	31.20	14.00	4.80	0.1	412	0	\$50	\$6,370	\$186	124.1
Classrooms/Office Ceilings	Media center 201	1	Water Source HP	8.92	129.00	В	6	Yes	1	Water Source HP	8.92	129.00	14.00	4.50	0.7	1,682	0	\$204	\$11,018	\$722	50.5
Classrooms/Office Ceilings	Workroom	1	Water Source HP	1.82	26.80	В	6	Yes	1	Water Source HP	1.82	26.80	14.00	4.80	0.2	421	0	\$51	\$5,050	\$147	96.1
Classrooms/Office Ceilings	SE 204	1	Water Source HP	2.29	31.20	В	6	Yes	1	Water Source HP	2.29	31.20	14.00	4.80	0.1	412	0	\$50	\$6,370	\$186	124.1
Classrooms/Office Ceilings	EC 208	1	Water Source HP	1.82	26.80	В	6	Yes	1	Water Source HP	1.82	26.80	14.00	4.80	0.2	421	0	\$51	\$5,050	\$147	96.1
Classrooms/Office Ceilings	SGI 209	1	Water Source HP	1.82	26.80	В	6	Yes	1	Water Source HP	1.82	26.80	14.00	4.80	0.2	421	0	\$51	\$5,050	\$147	96.1
Classrooms/Office Ceilings	BSI 209A	1	Water Source HP	1.82	26.80	В	6	Yes	1	Water Source HP	1.82	26.80	14.00	4.80	0.2	421	0	\$51	\$5,050	\$147	96.1
Classrooms/Office Ceilings	Classroom 211	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9
Classrooms/Office Ceilings	Classroom 213	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9
Classrooms/Office Ceilings	Classroom 215	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9
Classrooms/Office Ceilings	Classroom 216	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9





		Existin	g Conditions				Prop	osed Co	nditio	ns					Energy Im	pact & Fir	nancial An	alysis			
Location	Area(s)/System(s) Served	System Quantit y	System Type	Capacit y per	Heating Capacity per Unit (kBtu/hr	Remaining Useful Life	ECM #	Install High Efficienc y System?	System Quantit y	System Type	Cooling Capacit y per Unit (Tons)	Heating Capacity per Unit (kBtu/hr	Cooling Mode Efficiency (SEER/EER)	Heating Mode Efficiency (COP)	Total Peak kW Savings	kW/h		Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Classrooms/Office Ceilings	Classroom 217	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9
Classrooms/Office Ceilings	Classroom 218	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9
Classrooms/Office Ceilings	Classroom 219	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9
Classrooms/Office Ceilings	Classroom 220	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9
Classrooms/Office Ceilings	Classroom 222	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9
Classrooms/Office Ceilings	Classroom 224	1	Water Source HP	2.65	39.10	В	6	Yes	1	Water Source HP	2.65	39.10	14.00	4.80	0.2	591	0	\$72	\$7,366	\$215	99.9

Fuel Heating Inventory & Recommendations

		Existin	g Conditions			Prop	osed Co	nditio	ns				Energy In	pact & Fir	ancial An	alysis			
Location	Area(s)/System(s)	System Quantit Y	System Type		Remaining Useful Life	#	Install High Efficienc y System?	System Quantit Y		Canacity	Efficienc		Total Book	Total Annual kWh Savings		Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Mech 103	Boilers - 1,2 - Old section	2	Non-Condensing Hot Water Boiler	2,845.00	В	7	Yes	2	Condensing Hot Water Boiler	2,845.00	93.00%	Ec	0.0	0	73	\$794	\$105,885	\$11,380	119.0
Mech 103	Boilers - 3,4 New section	2	Condensing Hot Water Boiler	1,694.00	w		No						0.0	0	0	\$0	\$0	\$0	0.0

DHW Inventory & Recommendations

		Existin	g Conditions		Prop	osed Co	nditio	ns			Energy In	npact & Fir	nancial An	alysis			
Location	Arabici/Suctamici	System Quantit Y	System Type	Remaining Useful Life		Replace?	System Quantit Y		Fuel Type		Total Peak kW Savings	kWh		Total Annual Energy Cost Savings			Simple Payback w/ Incentives in Years
Boiler room	Old section	1	Storage Tank Water Heater (> 50 Gal)	w		No					0.0	0	0	\$0	\$0	\$0	0.0
DHW closet	New section	1	Storage Tank Water Heater (≤ 50 Gal)			No					0.0	0	0	\$0	\$0	\$0	0.0





Walk-In Cooler/Freezer Inventory & Recommendations

	Existin	g Conditions	Propo	osed Condi	tions		Energy In	npact & Fir	nancial An	alysis			
Location	Cooler/ Freezer Quantit y	Case	ECM #	Install EC Evaporator Fan Motors?	Install Electric Defrost Control?	Install Evaporator Fan Control?	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	1	Cooler (35F to 55F)		No	No	No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Medium Temp Freezer (0F to 30F)		No	No	No	0.0	0	0	\$0	\$0	\$0	0.0

Commercial Refrigerator/Freezer Inventory & Recommendations

	Existing Conditions			Proposed	Conditions	Energy Impact & Financial Analysis						
Location	Quantit y	Refrigerator/ Freezer Type	ENERGY STAR Qualified?	ECM #	Install ENERGY STAR Equipment?	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	2	Stand-Up Refrigerator, Solid Door (31 - 50 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	2	Refrigerator Chest	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Refrigerator Chest	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Freezer Chest	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0





Cooking Equipment Inventory & Recommendations

	Existing Conditions Proposed Conditions Energy Impact & Financi					inancial A	l Analysis					
Location	Quantity	Equipment Type	High Efficiency Equipement?	ECM #	Install High Efficiency Equipment?	Total Peak kW Savings	Total Annual kWh Savings			Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	2	Gas Convection Oven (Half Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Gas Steamer	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Gas Griddle (≤2 Feet Width)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	3	Insulated Food Holding Cabinet (1/2 Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0

Plug Load Inventory

	Existing Conditions					
Location	Quantit y	Equipment Description	Energy Rate (W)	ENERGY STAR Qualified ?		
Robert LHES	113	Desktop	145.0	Yes		
Robert LHES	21	Chrome book cart	40.0	Yes		
Robert LHES	2	Server	1,200.0	Yes		
Robert LHES	34	Printer - small	60.0	Yes		
Robert LHES	3	Printer - medium	80.0	Yes		
Robert LHES	6	Printer - large	200.0	Yes		
Robert LHES	27	Projector	400.0	Yes		
Robert LHES	5	Microwave	900.0	Yes		
Robert LHES	1	Refrigerator - small	70.0	Yes		
Robert LHES	1	Refrigerator - medium	90.0	Yes		
Robert LHES	2	Refrigerator - large	220.0	Yes		
Robert LHES	2	Coffee machine	400.0	Yes		
Robert LHES	2	Television - Plasma	130.0	Yes		
Robert LHES	1	Television - LED	100.0	Yes		
Robert LHES	27	Smart boards	5.0	Yes		
Robert LHES	1	Kiln	11,520.0	Yes		





Vending Machine Inventory & Recommendations

	Existin	g Conditions	Proposed	l Conditions	Energy In	npact & Fir	nancial An	alysis			
Location	Quantit Y	Vending Machine Type	ECM #	Install Controls?	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Faculty lounge	1	Refrigerated	8	Yes	0.2	1,612	0	\$195	\$230	\$50	0.9





APPENDIX B: ENERGY STAR® STATEMENT OF ENERGY PERFORMANCE

EUI is presented in terms of *site energy* and *source energy*. Site energy is the amount of fuel and electricity consumed by a building as reflected in utility bills. Source energy includes fuel consumed to generate electricity consumed at the site, factoring in electric production and distribution losses for the region.



ENERGY STAR[®] Statement of Energy Performance

53

Robert L Horbelt Elementary School

Primary Property Type: K-12 School Gross Floor Area (ft²): 80,586

Built: 2001

Score¹

For Year Ending: January 31, 2019 Date Generated: July 13, 2019

Property & Contact Information Property Address Property Owner Primary Contact Robert L Horbelt Elementary School Barnegat Township School District Stephen Brennan 104 Burr Street 550 BARENGAT BLVD. NORTH 550 BARENGAT BLVD. NORTH Barnegat, NJ 08005 Barnegat, New Jersey 08005 Barnegat, NJ 08005 609-698-5800 SBRENNAN@BARNEGATSCHOOLS.COI Property ID: 7071878 Energy Consumption and Energy Use Intensity (EUI) Annual Energy by Fuel Site EUI National Median Comparison Natural Gas (kBtu) 1,507,863 (36%) National Median Site EUI (kBtu/ft2) 53.8 51.8 kBtu/ft2 Electric - Grid (kBtu) 2,669,190 (64%) National Median Source EUI (kBtu/ft²) 116.5 % Diff from National Median Source EUI 4% Annual Emissions Source EUI Greenhouse Gas Emissions (Metric Tons 350 112.4 kBtu/ft2 CO2e/year) Signature & Stamp of Verifying Professional (Name) verify that the above information is true and correct to the best of my knowledge. Signature: Date: Licensed Professional

Professional Engineer Stamp (if applicable)

^{1.} The ENERGY STAR score is a 1-100 assessment of a building's energy efficiency as compared with similar buildings nationwide, adjusting for climate and business activity.





APPENDIX C: GLOSSARY

TERM	DEFINITION
Blended Rate	Used to calculate fiscal savings associated with measures. The blended rate is calculated by dividing the amount of your bill by the total energy use. For example, if your bill is \$22,217.22, and you used 266,400 kilowatt-hours, your blended rate is 8.3 cents per kilowatt-hour.
Btu	British thermal unit: a unit of energy equal to the amount of heat required to increase the temperature of one pound of water by one-degree Fahrenheit.
СНР	Combined heat and power. Also referred to as cogeneration.
СОР	Coefficient of performance: a measure of efficiency in terms of useful energy delivered divided by total energy input.
Demand Response	Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives.
DCV	Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need.
US DOE	United States Department of Energy
EC Motor	Electronically commutated motor
ЕСМ	Energy conservation measure
EER	Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input.
EUI	Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance.
Energy Efficiency	Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service.
ENERGY STAR®	ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.
EPA	United States Environmental Protection Agency
Generation	The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil).
GHG	Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from leaving Earth's atmosphere. The net effect is a trapping of absorbed radiation and a tendency to warm the planet's surface.
gpf	Gallons per flush
•	





gpm	Gallon per minute
HID	High intensity discharge: high-output lighting lamps such as high-pressure sodium, metal halide, and mercury vapor.
hp	Horsepower
HPS	High-pressure sodium: a type of HID lamp.
HSPF	Heating seasonal performance factor: a measure of efficiency typically applied to heat pumps. Heating energy provided divided by seasonal energy input.
HVAC	Heating, ventilating, and air conditioning
IHP 2014	US DOE Integral Horsepower rule. The current ruling regarding required electric motor efficiency.
IPLV	Integrated part load value: a measure of the part load efficiency usually applied to chillers.
kBtu	One thousand British thermal units.
kW	Kilowatt: equal to 1,000 Watts.
kWh	Kilowatt-hour: 1,000 Watts of power expended over one hour.
LED	Light emitting diode: a high-efficiency source of light with a long lamp life.
LGEA	Local Government Energy Audit
Load	The total power a building or system is using at any given time.
Measure	A single activity, or installation of a single type of equipment, that is implemented in a building system to reduce total energy consumption.
МН	Metal halide: a type of HID lamp.
MBh	Thousand Btu per hour
MBtu	One thousand British thermal units
MMBtu	One million British thermal units
MV	Mercury Vapor: a type of HID lamp.
NJBPU	New Jersey Board of Public Utilities
NJCEP	New Jersey's Clean Energy Program: NJCEP is a statewide program that offers financial incentives, programs and services for New Jersey residents, business owners and local governments to help them save energy, money and the environment.
psig	Pounds per square inch gauge.
Plug Load	Refers to the amount of power used in a space by products that are powered by means of an ordinary AC plug.
PV	Photovoltaic: refers to an electronic device capable of converting incident light directly into electricity (direct current).





SEER	Seasonal energy efficiency ratio: a measure of efficiency in terms of annual cooling energy provided divided by total electric input.
SEP	Statement of energy performance: a summary document from the ENERGY STAR® Portfolio Manager®.
Simple Payback	The amount of time needed to recoup the funds expended in an investment or to reach the break-even point between investment and savings.
SREC	Solar renewable energy credit: a credit you can earn from the state for energy produced from a photovoltaic array.
T5, T8, T12	A reference to a linear lamp diameter. The number represents increments of $1/8^{\text{th}}$ of an inch.
Temperature Setpoint	The temperature at which a temperature regulating device (thermostat, for example) has been set.
therm	100,000 Btu. Typically used as a measure of natural gas consumption.
tons	A unit of cooling capacity equal to 12,000 Btu/hr.
Turnkey	Provision of a complete product or service that is ready for immediate use
VAV	Variable air volume
VFD	Variable frequency drive: a controller used to vary the speed of an electric motor.
WaterSense™	The symbol for water efficiency. The WaterSense™ program is managed by the EPA.
Watt (W)	Unit of power commonly used to measure electricity use.







Local Government Energy Audit Report

Joseph T. Donahue Elementary School October 31, 2019

Prepared for:

Barnegat Township School District

200 Bengal Blvd

Barnegat, New Jersey 08005

Prepared by:

TRC

900 Route 9 North

Woodbridge, New Jersey 07095

Disclaimer

The goal of this audit report is to identify potential energy efficiency opportunities, help prioritize specific measures for implementation, and provide information about financial incentives that may be available. Most energy conservation measures have received preliminary analysis of feasibility that identifies expected ranges of savings and costs. This level of analysis is usually considered sufficient to establish a basis for further discussion and to help prioritize energy measures.

TRC Companies, Inc. reviewed the energy conservation measures and estimates of energy savings were reviewed for technical accuracy. Actual, achieved energy savings depend on behavioral factors and other uncontrollable variables and, therefore, estimates of final energy savings are not guaranteed. TRC and the New Jersey Board of Public Utilities (NJBPU) shall in no event be liable should the actual energy savings vary.

TRC bases estimated installation costs on our experience at similar facilities, pricing from local contractors and vendors, and/or cost estimates from RS Means. We encourage the owner of the facility to independently confirm these cost estimates and to obtain multiple estimates when considering measure installations. Actual installation costs can vary widely based on individual measures and conditions. TRC and NJBPU do not guarantee installed cost estimates and shall in no event be held liable should actual installed costs vary from estimates.

New Jersey's Clean Energy Program (NJCEP) incentive values provided in this report are estimates based on program information available at the time of the report. Incentive levels are not guaranteed. The NJBPU reserves the right to extend, modify, or terminate programs without prior notice. Please review all available program incentives and eligibility requirements prior to selecting and installing any energy conservation measures.

The customer and their respective contractor(s) are responsible to implement energy conservation measures in complete conformance with all applicable local, state and federal requirements.

Copyright ©2019 TR Companies, Inc. All rights reserved.

Reproduction or distribution of the whole, or any part of the contents of this document without written permission of TRC is prohibited. Neither TRC nor any of its employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any data, information, method, product or process disclosed in this document, or represents that its use will not infringe upon any privately-owned rights, including but not limited to, patents, trademarks or copyrights.





Table of Contents

1	Execut	Executive Summary1						
	1.1	Planning Your Project	2					
	Pick	Your Installation Approach	2					
		e Options from Around the State						
2	Existin	g Conditions						
	2.1	Site Overview						
	2.2	Building Occupancy						
	2.3	Building Envelope						
	2.4 2.5	Lighting Systems						
		pump units						
	2.6 2.7	Heating Hot Water Systems Building Energy Management Systems (EMS)						
	2.8	Domestic Hot Water						
	2.9	Food Service and Refrigeration Equipment						
	2.10	Plug Load & Vending Machines	15					
	2.11	Water-Using Systems						
	2.12	On-Site Generation						
3	Energy	y Use and Costs	16					
	3.1	Electricity						
	3.2	Natural Gas						
	3.3	Benchmarking						
		king Your Energy Performance						
4	Energy	Conservation Measures	22					
	4.1	Lighting	25					
	ECM	1: Install LED Fixtures	25					
	ECM	2: Retrofit Fixtures with LED Lamps	25					
	4.2	Lighting Controls	26					
	ECM	3: Install Occupancy Sensor Lighting Controls	26					
	4.3	Variable Frequency Drives (VFD)	27					
	ECM	4: Install VFDs on Constant Volume (CV) Fans	27					
	4.4	Domestic Water Heating	28					
	ECM	5: Install High-Efficiency Gas-Fired Water Heater	28					
		6: Install Low-Flow DHW Devices						
	4.5	Food Service & Refrigeration Measures	29					
	ECM	7: Vending Machine Control	29					
5	Energy	/ Efficient Best Practices	30					






Αr	pendix (C: Glossary	
		A: Equipment Inventory & Recommendations B: ENERGY STAR® Statement of Energy Performance	
	8.1 8.2	Retail Electric Supply Options	43
8		Purchasing and Procurement Strategies	
	7.6	SREC Registration Program	
	7.5	Energy Savings Improvement Program	
	7.3 7.4	Pay for Performance - Existing Buildings Combined Heat and Power	
	7.2	Direct Install	
	7.1	SmartStart	_
7	Projec	t Funding and Incentives	36
	6.2	Combined Heat and Power	35
	6.1	Solar Photovoltaic	34
6	On-site	e Generation	33
		urement Strategies	
	Ū	Load Controlser Conservation	
		er Heater Maintenance	
	Boile	er Maintenance	31
		C Filter Cleaning and Replacement	
		mostat Schedules and Temperature Resetsystem Evaporator/Condenser Coil Cleaning	
		or Maintenance	
		ting Controls	
	Ener	gy Tracking with ENERGY STAR® Portfolio Manager®	30





1 EXECUTIVE SUMMARY

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) report for Joseph T. Donahue Elementary School. This report provides you with information about the Elementary School's energy use, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help make changes in the Elementary School. TRC conducted this study as part of a comprehensive effort to assist New Jersey school districts and local governments in controlling their energy costs and to help protect our environment by reducing statewide energy consumption.

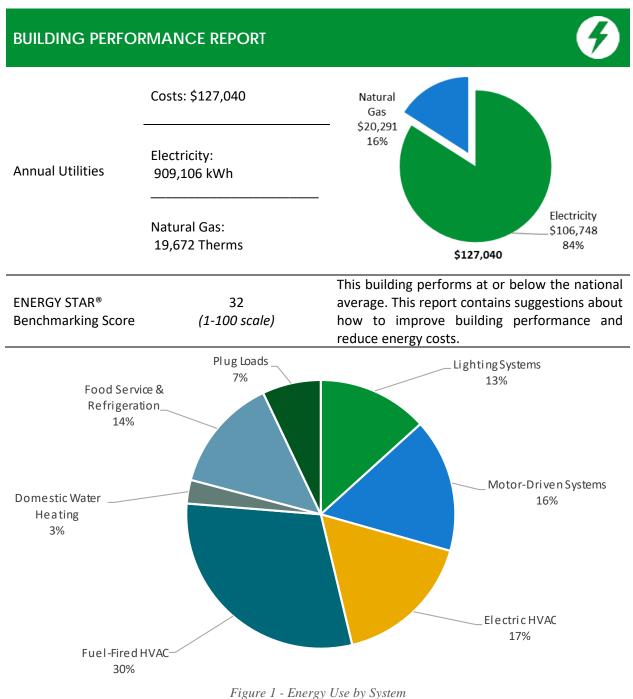






POTENTIAL IMPROVEMENTS



This energy audit considered a range of potential energy improvements in your building. Costs and savings will vary between improvements. Presented below are two potential scopes of work for your consideration.


Scenario 1: Full Package (all evaluated measures)

	\$141,423	
es ¹	\$18,600	
	\$20,523	
Electricity: 170,654 kWh Natural Gas: 470 Therms		
vings	89 Tons	
	6.0 Years	
Site Energy Savings (all utilities) 12		
	Electricit Natural (avings	



Scenario 2: Cost Effective Package²

Installation Cost		\$129,922
Potential Rebates & Incentiv	es	\$18,202
Annual Cost Savings		\$20,322
Annual Energy Savings	,	: 170,654 kWh s: 274 Therms
Greenhouse Gas Emission Sa	avings	88 Tons
Simple Payback		5.5 Years
Site Energy Savings (all utiliti	12%	



On-site Generation Potential

Photovoltaic	High
Combined Heat and Power	None

¹ Incentives are based on current SmartStart Prescriptive incentives. Other program incentives may apply.

² A cost-effective measure is defined as one where the simple payback does not exceed two-thirds of the expected proposed equipment useful life. Simple payback is based on the net measure cost after potential incentives.





#	Energy Conservation Measure	Cost effective?	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades		111,678	26.3	-14	\$12,970	\$83,436	\$13,772	\$69,664	5.4	110,827
ECM 1	Install LED Fixtures	Yes	43,500	5.0	0	\$5,108	\$48,298	\$5,000	\$43,298	8.5	43,805
ECM 2	Retrofit Fixtures with LED Lamps	Yes	68,178	21.4	-14	\$7,862	\$35,138	\$8,772	\$26,366	3.4	67,023
Lighting Control Measures			6,290	1.6	-1	\$725	\$4,360	\$570	\$3,790	5.2	6,180
ECM 3	Install Occupancy Sensor Lighting Controls	Yes	6,290	1.6	-1	\$725	\$4,360	\$570	\$3,790	5.2	6,180
Variable	Frequency Drive (VFD) Measures		49,462	14.0	0	\$5,808	\$41,559	\$3,760	\$37,799	6.5	49,808
ECM 4	Install VFDs on Constant Volume (CV) Fans	Yes	49,462	14.0	0	\$5,808	\$41,559	\$3,760	\$37,799	6.5	49,808
Domestic Water Heating Upgrade			0	0.0	62	\$642	\$11,608	\$398	\$11,210	17.5	7,291
ECM 5	Install High Efficiency Gas-Fired Water Heater	No	0	0.0	20	\$202	\$11,500	\$398	\$11,102	55.0	2,291
ECM 6	Install Low-Flow DHW Devices	Yes	0	0.0	43	\$440	\$108	\$0	\$108	0.2	5,000
Food Se	rvice & Refrigeration Measures		3,224	0.4	0	\$379	\$460	\$100	\$360	1.0	3,246
ECM 7	Vending Machine Control	Yes	3,224	0.4	0	\$379	\$460	\$100	\$360	1.0	3,246
TOTALS (COST EFFECTIVE MEASURES)			170,654	42.3	27	\$20,322	\$129,922	\$18,202	\$111,720	5.5	175,061
TOTALS (ALL MEASURES)			170,654	42.3	47	\$20,523	\$141,423	\$18,600	\$122,823	6.0	177,352

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

Figure 2 – Evaluated Energy Improvements

For more detail on each evaluated energy improvement and a break out of cost-effective improvements, see **Section 4: Energy Conservation Measures**.

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





1.1 Planning Your Project

Careful planning makes for a successful energy project. When considering this scope of work, you will have some decisions to make, such as:

- ♦ How will the project be funded and/or financed?
- Is it best to pursue individual ECMs, groups of ECMs, or use a comprehensive approach where all ECMs are installed together?
- Are there other facility improvements that should happen at the same time?

Pick Your Installation Approach

New Jersey's Clean Energy Programs give you the flexibility to do a little or a lot. Rebates, incentives, and financing are available to help reduce both your installation costs and your energy bills. If you are planning to take advantage of these programs, make sure to review incentive program guidelines before proceeding. This is important because in most cases you will need to submit applications for the incentives before purchasing materials or starting installation.

The potential ECMs identified for this building likely qualify for multiple incentive and funding programs. Based on current program rules and requirements, your measures are likely to qualify for the following programs:

	Energy Conservation Measure	SmartStart	Direct Install	Pay For Performance
ECM 1	Install LED Fixtures	X	X	Х
ECM 2	Retrofit Fixtures with LED Lamps	X	X	Х
ECM 3	Install Occupancy Sensor Lighting Controls	X	X	Х
ECM 4	Install VFDs on Constant Volume (CV) HVAC	X	X	Х
ECM 5	Install High Efficiency Gas Water Heater		Х	Х
ECM 6	Install Low-Flow Domestic Hot Water Devices	Х	Х	Х
ECM 7	Vending Machine Control	X	Х	Х

Figure 3 – Funding Options







New Jersey's Clean Energy Programs At-A-Glance

	SmartStart Flexibility to install at your own pace	Direct Install Turnkey installation	Pay for Performance Whole building upgrades		
Who should use it?	Buildings installing individual measures or small group of measures.	Small to mid-size facilities that can bundle multiple measures together. Average peak demand should be below 200 kW. Not suitable for significant building shell issues.	Mid to large size facilities looking to implement as many measures as possible at one time. Peak demand should be over 200 kW.		
How does it work?	Use in-house staff or your preferred contractor.	Pre-approved contractors pass savings along to you via reduced material and labor costs.	Whole-building approach to energy upgrades designed to reduce energy use by at least 15%. The more you save, the higher the incentives.		
What are the Incentives?	Fixed incentives for specific energy efficiency measures.	Incentives pay up to 70% of eligible costs, up to \$125,000 per project. You pay the remaining 30% directly to the contractor.	Up to 25% of installation cost, calculated based on level of energy savings per square foot.		
How do I participate? Submit an application for the specific equipment to be installed.		Contact a participating contractor in your region.	Contact a pre-qualified Partner to develop your Energy Reduction Plan and set your energy savings targets.		

Take the next step by visiting **www.njcleanenergy.com** for program details, applications, and to contact a qualified contractor.





Individual Measures with SmartStart

For facilities wishing to pursue only selected individual measures (or planning to phase implementation of selected measures over multiple years), incentives are available through the SmartStart program. To participate, you can use internal resources or an outside firm or contractor to perform the final design of the ECM(s) and install the equipment. Program pre-approval is required for some SmartStart incentives, so only after receiving pre-approval should you proceed with ECM installation.

Turnkey Installation with Direct Install

The Direct Install program provides turnkey installation of multiple measures through an authorized network of participating contractors. This program can provide substantially higher incentives than SmartStart, up to 70% of the cost of selected measures. Direct Install contractors will assess and verify individual measure eligibility and, in most cases, they perform the installation work. The Direct Install program is available to sites with an average peak demand of less than 200 kW.

Whole Building Approach with Pay for Performance

Pay for Performance can be a good option for medium to large sized facilities to achieve deep energy savings. Pay for Performance allows you to install as many measures as possible under a single project as well as address measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program (ESIP) loan also use this program. Pay for Performance works for larger customers with a peak demand over 200 kW. The minimum installed scope of work must include at least two unique measures resulting in at least 15% energy savings, where lighting cannot make up the majority of the savings.

More Options from Around the State

Financing and Planning Support with the Energy Savings Improvement Program (ESIP)

For larger facilities with limited capital availability to implement ECMs, project financing may be available through the ESIP. Supported directly by the NJBPU, ESIP provides government agencies with project development, design, and implementation support services, as well as, attractive financing for implementing ECMs. You have already taken the first step as an LGEA customer, because this report is required to participate in ESIP.

Resiliency with Return on Investment through Combined Heat & Power (CHP)

The CHP program provides incentives for combined heat and power (aka cogeneration) and waste heat to power projects. Combined heat and power systems generate power on-site and recover heat from the generation system to meet on-site thermal loads. Waste heat to power systems use waste heat to generate power. You will work with a qualified developer who will design a system that meets your building's heating and cooling needs.

Ongoing Electric Savings with Demand Response

The Demand Response Energy Aggregator program reduces electric loads at commercial facilities when wholesale electricity prices are high or when the reliability of the electric grid is threatened due to peak power demand. By enabling commercial facilities to reduce electric demand during times of peak demand, the grid is made more reliable and overall transmission costs are reduced for all ratepayers. Curtailment service providers provide regular payments to medium and large consumers of electric power for their participation in demand response (DR) programs. Program participation is voluntary, and facilities receive payments regardless of whether they are called upon to curtail their load during times of peak demand.





2 EXISTING CONDITIONS

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) Report for Joseph T. Donahue Elementary School. This report provides information on how the Elementary School uses energy, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help you implement the ECMs. This report also contains valuable information on financial incentives from New Jersey's Clean Energy Program (NJCEP) for implementing ECMs.

TRC conducted this study as part of a comprehensive effort to assist New Jersey educational and local government facilities in controlling energy costs and protecting our environment by offering a wide range of energy management options and advice.

For a detailed list of the locations and recommended energy conservation measures for all inventoried equipment, see **Appendix A: Equipment Inventory & Recommendations.**

2.1 Site Overview

On July 5, 2019, TRC performed an energy audit at Joseph T. Donahue Elementary School located in Barnegat, New Jersey. TRC met with Neil Piro to review the facility operations and help focus our investigation on specific energy-using systems.

Joseph T. Donahue Elementary School is a one-story, 72,300 square foot building built in 2008. Spaces include: classrooms, a gymnasium, offices, a cafeteria, corridors, a sanctuary, offices, a kitchen, and mechanical space.

The building has onsite generation with solar PV and is 100% heated and cooled.

2.2 Building Occupancy

The Elementary School is occupied from September through June. Typical weekday occupancy is 80 staff and 947 students.

Building Name	Weekday/Weekend	Operating Schedule
	Weekday	7:30 AM - 5:00 PM
Joseph T. Donahue Elementary School	Weekend	Saturday: 8:00 AM - 2:00 PM (gym only) Sunday: 8:30 AM - 12:30 PM (cafeteria and gym)

Figure 4 - Building Occupancy Schedule





2.3 Building Envelope

Building walls are concrete block over structural steel with a concrete and brick facade. The dividing walls are constructed from concrete masonry units. The roof is built-up, flat, and covered with black EPDM membrane. It is in good condition.

All windows are double-glazed with aluminum frames and a thermal break. The glass-to-frame seals are in good condition. Exterior doors have aluminum frames and are in good condition with undamaged door seals.



Roof



Windows



External Facade



Exterior Door





2.4 Lighting Systems

The primary interior lighting system uses T8 linear tube fixtures, 60-watt incandescent lamps and 26-watt 4-pin compact fluorescent lamps. Fixture types include 2- or 3-lamp 4-foot long troffers and surface-mounted fixtures.

The gymnasium has T5 high-output high bay fixtures that are controlled using occupancy sensors. The interior fixtures in the school are controlled by occupancy sensors and wall switches. All exit signs are LED units.

Interior lighting levels were generally sufficient. Most fixtures are in good condition.

Exterior lighting is provided by wall-mounted 70-watt metal halide and 57-watt LED fixtures. Wall sconces contain 26-watt 4-pin compact fluorescent lamps. The parking lot contains 400-watt metal halide pole fixtures that are controlled using timeclock and photocells.



Pole Fixtures



Linear T8 Troffers



4-pin CFL Fixtures



Ceiling-mounted Fixtures





2.5 Air Handling Systems

Heat pump units

The building is mainly conditioned by 57 distributed water source heat pumps with cooling capacities ranging from 1.5- to 3-tons and heating capacities ranging from 10 to 36 MBh. Ground water is distributed to the heat pumps by two variable speed 10 hp circulation pumps. The boiler provides supplemental hot water to the loop when needed. The heat pump units have fractional horsepower supply fans and an average EER rating of 12. There are several energy recovery units on the roof with supply and return fans of various capacities.

Space temperatures in the zones, as well as loop temperatures, are controlled using an EMS. The units are within their useful life.







Water Source Heat Pump





2.6 Heating Hot Water Systems

Two Aerco condensing hot water boilers serve the heat pump loop. The boilers have an output capacity of 1760 MBH with a name plate efficiency of 88%.

Ground water is circulated to the boilers where it is heated as required, and then distributed using two variable speed 15 hp pumps (located in the boiler room) to heat pumps located in various sections of the school.

Space and loop temperatures are controlled using the Building Energy Management System (EMS). A roof-mounted cooling tower with a variable speed 10 hp fan helps regulate the loop temperature.

Various spaces of the school are heated using 7.5 kW electric resistance heaters. The condensing boilers serving the newer section were installed in the year 2007 and are within their useful life.



Condensing Boilers




Heating Hot Water Pumps






2.7 Building Energy Management Systems (EMS)


A Trane EMS controls the HVAC equipment, boilers, air handlers, pumps, and energy recovery units. The EMS provides equipment scheduling control and monitors and controls space temperatures, supply air temperatures, humidity, heating water loop temperatures, and chilled water loop temperatures.




Boilers



Heat Pump Supply



Energy Recovery Unit



Scheduling





2.8 Domestic Hot Water

One gas-fired PVI water heater serves the domestic hot water needs of the Elementary School. This unit has an input capacity of 199 MBh and a tank capacity of 175 gallons and is 80% efficient. The unit was installed in 2008 and has been evaluated for replacement.

Hot water is distributed to the end uses using fractional horse power circulating pump.



DHW



Circulation Pump





2.9 Food Service and Refrigeration Equipment

The kitchen has a mix of gas and electric equipment, including gas convection oven, gas burners, steamer, steam tables, and a griddle, that is used to prepare meals for students. Most cooking is done using a convection gas-fired oven. Bulk prepared foods are held in several electric holding cabinets. Equipment is high-efficiency and in good condition.

The kitchen has several stand-up solid door refrigerators. There are also refrigerator and freezer chests. All equipment is standard efficiency and appears to be in good condition.

The walk-in refrigerator has an estimated 2-ton compressor and a two-fan evaporator. The walk-in medium temperature freezer has an approximately 2.5-ton compressor and a four-fan evaporator with defrost controls.



Walk-in Refrigerator



Gas Stove



Oven and Steamer



Steam Tables





2.10 Plug Load & Vending Machines

The utility bill analysis indicates that plug loads consume approximately 7% percent of total building energy use. This is higher than a typical building.

You may wish to consider paying particular attention to minimizing your plug load usage. This report makes suggestions for ECMs in this area, as well as Energy Efficient Best Practices.

There are approximately 133 computer work stations throughout the Elementary School. Plug loads throughout the building include general café and office equipment. There are classroom typical loads such as Smart Boards, projectors, and fans. There are several residential-style refrigerators throughout the building that are used to store food for the staff. These vary in condition and efficiency.

2.11 Water-Using Systems

Faucet flow rates are at 1.5 gallons per minute (gpm) or higher. Toilets are rated at 1.6 gallons per flush (gpf) and urinals are rated at 1.0 gpf.

2.12 On-Site Generation

Joseph T. Donahue Elementary School has a photovoltaic (PV) array with panels that was installed in 2011. This system provides approximately 32% of the electricity used at the Elementary School.






3 ENERGY USE AND COSTS

Twelve months of utility billing data are used to develop annual energy consumption and cost data. This information creates a profile of the annual energy consumption and energy costs.

Utility Summary					
Fuel	Usage	Cost			
Electricity	909,106 kWh	\$106,748			
Natural Gas	19,672 Therms	\$20,291			
Total	\$127,040				



An energy balance identifies and quantifies energy use in your various building systems. This can highlight areas with the most potential for improvement. This energy balance was developed using calculated energy use for each of the end uses noted in the figure.

The energy auditor collects information regarding equipment operating hours, capacity, efficiency, and other operational parameters from facility staff, drawings, and on-site observations. This information is used as the inputs to calculate the existing conditions energy use for the site. The calculated energy use is then compared to the historical energy use and the initial inputs are revised, as necessary, to balance the calculated energy use to the historical energy use.





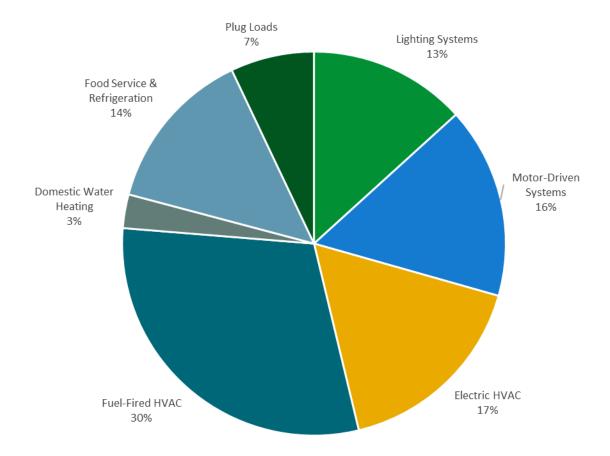



Figure 5 - Energy Balance





3.1 Electricity

JCP&L delivers electricity under rate class GSS, with electric production provided by South Jersey Energy/TriEagle Energy, a third-party supplier.

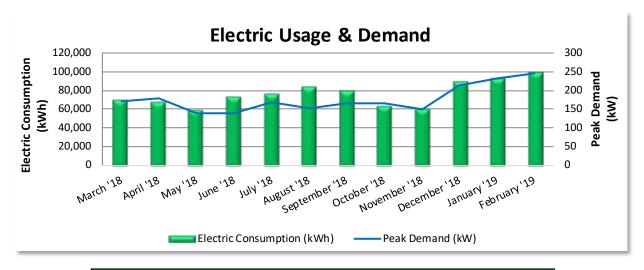

	Electric Billing Data											
Period Ending	Days in Period	Electric Usage (kWh)	Demand (kW)	Demand Cost	Total Electric Cost							
3/27/18	30	69,504	170	\$1,053	\$8,365							
4/25/18	29	67,251	180	\$1,071	\$7,598							
5/25/18	30	58,531	140	\$815	\$6,923							
6/26/18	32	73,042	140	\$872	\$8,411							
7/26/18	30	75,602	168	\$1,063	\$8,854							
8/27/18	32	83,145	153	\$959	\$9,415							
9/26/18	30	79,064	165	\$1,043	\$8,822							
10/25/18	29	63,308	166	\$978	\$7,960							
11/27/18	33	60,088	149	\$870	\$7,365							
12/27/18	30	88,847	213	\$1,275	\$11,399							
1/25/19	29	92,322	233	\$1,397	\$10,450							
2/25/19	31	98,402	247	\$1,484	\$11,187							
Totals	365	909,106	247	\$12,881	\$106,748							
Annual	365	909,106	247	\$12,881	\$106,748							

Notes:


- Peak demand of 247 kW occurred in February '19.
- The average electric cost over the past 12 months was \$0.117/kWh, which is the blended rate that includes energy supply, distribution, demand, and other charges. This report uses this blended rate to estimate energy cost savings.





3.2 Natural Gas

New Jersey Natural Gas delivers natural gas under rate class GSL, with natural gas supply provided by South Jersey Energy, a third-party supplier.

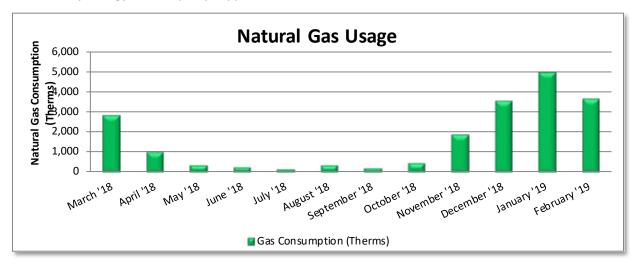

	Gas Billing Data										
Period Ending	Days in Period	Natural Gas Usage (Therms)	Natural Gas Cost								
4/6/18	30	2,809	\$2,461								
5/3/18	27	1,007	\$1,044								
6/6/18	34	380	\$498								
7/9/18	33	289	\$486								
8/3/18	25	173	\$342								
8/29/18	26	382	\$557								
10/1/18	33	208	\$400								
11/2/18	32	471	\$602								
12/5/18	33	1,892	\$1,692								
1/5/19	31	3,531	\$3,940								
2/5/19	31	4,927	\$4,859								
3/7/19	30	3,602	\$3,410								
Totals	365	19,672	\$20,291								
Annual	365	19,672	\$20,291								

Notes:

• The average gas cost for the past 12 months is \$1.032/therm, which is the blended rate used throughout the analysis.





3.3 Benchmarking

Your building was benchmarked using the United States Environmental Protection Agency's (EPA) *Portfolio Manager®* software. Benchmarking compares your building's energy use to that of similar buildings across the country, while neutralizing variations due to location, occupancy and operating hours. Some building types can be scored with a 1-100 ranking of a building's energy performance relative to the national building market. A score of 50 represents the national average and a score of 100 is best.

This ENERGY STAR® benchmarking score provides a comprehensive snapshot of your building's energy performance. It assesses the building's physical assets, operations, and occupant behavior, which is compiled into a quick and easy-to-understand score.

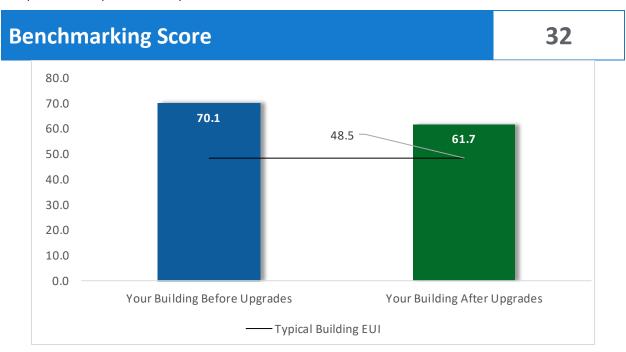


Figure 6 - Energy Use Intensity Comparison

This building performs at, or below the national average. This report contains suggestions about how to improve building performance and reduce energy costs.

Energy use intensity (EUI) measures energy consumption per square foot and is the standard metric for comparing buildings' energy performance. A lower EUI means better performance and less energy consumed. A number of factors can cause as building to vary from the "typical" energy usage. Local weather conditions, building age and insulation levels, equipment efficiency, daily occupancy hours, changes in occupancy throughout the year, equipment operating hours, and occupant behavior all contribute to a building's energy use and the benchmarking score.





Tracking Your Energy Performance

Keeping track of your energy use on a monthly basis is one of the best ways to keep energy costs in check. Update your utility information in Portfolio Manager® regularly, so that you can keep track of your building's performance.

We have created a Portfolio Manager® account for your facility and we have already entered the monthly utility data shown above for you. Account login information for your account will be sent via email.

Free online training is available to help you use ENERGY STAR® Portfolio Manager® to track your building's performance at: https://www.energystar.gov/buildings/training.

For more information on ENERGY STAR® and Portfolio Manager®, visit their website³.

LGEA Report - Barnegat Township School District Joseph T. Donahue Elementary School

³ https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/earn-recognition/energy-star-certification/how-app-1.





4 ENERGY CONSERVATION MEASURES

The goal of this audit report is to identify and evaluate potential energy efficiency improvements, provide information about the cost effectiveness of those improvements, and recognize potential financial incentives from NJBPU. Most energy conservation measures have received preliminary analysis of feasibility which identifies expected ranges of savings and costs. This level of analysis is typically sufficient to demonstrate project cost-effectiveness and help prioritize energy measures.

Calculations of energy use and savings are based on the current version of the *New Jersey's Clean Energy Program Protocols to Measure Resource Savings*, which is approved by the NJBPU. Further analysis or investigation may be required to calculate more precise savings based on specific circumstances.

Operation and maintenance costs for the proposed new equipment will generally be lower than the current costs for the existing equipment—especially if the existing equipment is at or past its normal useful life. We have conservatively assumed there to be no impact on overall maintenance costs over the life of the equipment.

Financial incentives are based on the current NJCEP prescriptive SmartStart program. A higher level of investigation may be necessary to support any SmartStart Custom, Pay for Performance, or Direct Install incentive applications. Some measures and proposed upgrades may be eligible for higher incentives than those shown below through other NJCEP programs described in a following section of this report.





#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades	111,678	26.3	-14	\$12,970	\$83,436	\$13,772	\$69,664	5.4	110,827
ECM 1	Install LED Fixtures	43,500	5.0	0	\$5,108	\$48,298	\$5,000	\$43,298	8.5	43,805
ECM 2	Retrofit Fixtures with LED Lamps	68,178	21.4	-14	\$7,862	\$35,138	\$8,772	\$26,366	3.4	67,023
Lighting	Control Measures	6,290	1.6	-1	\$725	\$4,360	\$570	\$3,790	5.2	6,180
ECM 3	Install Occupancy Sensor Lighting Controls	6,290	1.6	-1	\$725	\$4,360	\$570	\$3,790	5.2	6,180
Variable	Frequency Drive (VFD) Measures	49,462	14.0	0	\$5,808	\$41,559	\$3,760	\$37,799	6.5	49,808
ECM 4	Install VFDs on Constant Volume (CV) Fans	49,462	14.0	0	\$5,808	\$41,559	\$3,760	\$37,799	6.5	49,808
Domesti	c Water Heating Upgrade	0	0.0	62	\$642	\$11,608	\$398	\$11,210	17.5	7,291
ECM 5	Install High Efficiency Gas-Fired Water Heater	0	0.0	20	\$202	\$11,500	\$398	\$11,102	55.0	2,291
ECM 6	Install Low-Flow DHW Devices	0	0.0	43	\$440	\$108	\$0	\$108	0.2	5,000
Food Sei	rvice & Refrigeration Measures	3,224	0.4	0	\$379	\$460	\$100	\$360	1.0	3,246
ECM 7	Vending Machine Control	3,224	0.4	0	\$379	\$460	\$100	\$360	1.0	3,246
	TOTALS	170,654	42.3	47	\$20,523	\$141,423	\$18,600	\$122,823	6.0	177,352

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance

Figure 7 – All Evaluated ECMs

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)		Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades	111,678	26.3	-14	\$12,970	\$83,436	\$13,772	\$69,664	5.4	110,827
ECM 1	Install LED Fixtures	43,500	5.0	0	\$5,108	\$48,298	\$5,000	\$43,298	8.5	43,805
ECM 2	Retrofit Fixtures with LED Lamps	68,178	21.4	-14	\$7,862	\$35,138	\$8,772	\$26,366	3.4	67,023
Lighting	Control Measures	6,290	1.6	-1	\$725	\$4,360	\$570	\$3,790	5.2	6,180
ECM 3	Install Occupancy Sensor Lighting Controls	6,290	1.6	-1	\$725	\$4,360	\$570	\$3,790	5.2	6,180
Variable	Frequency Drive (VFD) Measures	49,462	14.0	0	\$5,808	\$41,559	\$3,760	\$37,799	6.5	49,808
ECM 4	Install VFDs on Constant Volume (CV) Fans	49,462	14.0	0	\$5,808	\$41,559	\$3,760	\$37,799	6.5	49,808
Domesti	c Water Heating Upgrade	0	0.0	43	\$440	\$108	\$0	\$108	0.2	5,000
ECM 6	Install Low-Flow DHW Devices	0	0.0	43	\$440	\$108	\$0	\$108	0.2	5,000
Food Sei	vice & Refrigeration Measures	3,224	0.4	0	\$379	\$460	\$100	\$360	1.0	3,246
ECM 7	Vending Machine Control	3,224	0.4	0	\$379	\$460	\$100	\$360	1.0	3,246
	TOTALS	170,654	42.3	27	\$20,322	\$129,922	\$18,202	\$111,720	5.5	175,061

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance

Figure 8 – Cost Effective ECMs

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





4.1 Lighting

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Deman d Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Net Cost (\$)	k	CO ₂ e
Lighting	g Upgrades	111,678	26.3	-14	\$12,970	\$83,436	\$13,772	\$69,664	5.4	110,827
ECM 1	Install LED Fixtures	43,500	5.0	0	\$5,108	\$48,298	\$5,000	\$43,298	8.5	43,805
ECM 2	Retrofit Fixtures with LED Lamps	68,178	21.4	-14	\$7,862	\$35,138	\$8,772	\$26,366	3.4	67,023

When considering lighting upgrades, we suggest using a comprehensive design approach that simultaneously upgrades lighting fixtures and controls to maximize energy savings and improve occupant lighting. Comprehensive design will also consider appropriate lighting levels for different space types to make sure that the right amount of light is delivered where needed. If conversion to LED light sources are proposed, we suggest converting all of a specific lighting type (e.g. linear fluorescent) to LED lamps to minimize the number of lamp types in use at the Elementary School, which should help reduce future maintenance costs.

ECM 1: Install LED Fixtures

Replace existing fixtures containing HID lamps with new LED light fixtures. This measure saves energy by installing LEDs, which use less power than other technologies with a comparable light output.

In some cases, HID fixtures can be retrofit with screw-based LED lamps. Replacing an existing HID fixture with a new LED fixture will generally provide better overall lighting optics; however, replacing the HID lamp with a LED screw-in lamp is typically a less expensive retrofit. We recommend you work with your lighting contractor to determine which retrofit solution is best suited to your needs and will be compatible with the existing fixture(s).

Maintenance savings may also be achieved, as LED lamps last longer than other light sources and therefore do not need to be replaced as often.

Affected building areas: exterior fixtures

ECM 2: Retrofit Fixtures with LED Lamps

Replace fluorescent, compact fluorescent lamps, or incandescent lamps with LED lamps. Many LED tubes are direct replacements for existing fluorescent tubes and can be installed while leaving the fluorescent fixture ballast in place. LED lamps can be used in existing fixtures as direct replacements for most other lighting technologies.

This measure saves energy by installing LEDs, which use less power than other lighting technologies while providing equivalent lighting output for the space. Maintenance savings may also be available, as longer-lasting LEDs lamps will not need to be replaced as often as the existing lamps.

Affected building areas: all areas with fluorescent fixtures with T8 tubes, CFL, and incandescent lamps.





4.2 Lighting Controls

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)		Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Lighting	g Upgrades	111,678	26.3	-14	\$12,970	\$83,436	\$13,772	\$69,664	5.4	110,827
ECM 1	Install LED Fixtures	43,500	5.0	0	\$5,108	\$48,298	\$5,000	\$43,298	8.5	43,805
ECM 2	Retrofit Fixtures with LED Lamps	68,178	21.4	-14	\$7,862	\$35,138	\$8,772	\$26,366	3.4	67,023

Lighting controls reduce energy use by turning off or lowering lighting fixture power levels when not in use. A comprehensive approach to lighting design should upgrade the lighting fixtures and the controls together for maximum energy savings and improved lighting for occupants.

ECM 3: Install Occupancy Sensor Lighting Controls

Install occupancy sensors to control lighting fixtures in areas that are frequently unoccupied, even for short periods. For most spaces, we recommend that lighting controls use dual technology sensors, which reduce the possibility of lights turning off unexpectedly.

Occupancy sensors detect occupancy using ultrasonic and/or infrared sensors. When an occupant enters the space, the lighting fixtures switch to full lighting levels. Most occupancy sensor lighting controls allow users to manually turn fixtures on/off, as needed. Some controls can also provide dimming options.

Occupancy sensors can be mounted on the wall at existing switch locations, on the ceiling, or in remote locations. In general, wall switch replacement sensors are best suited to single occupant offices and other small rooms. Ceiling-mounted or remote-mounted sensors are used in large spaces, locations without local switching, and where wall switches are not in the line-of-sight of the main work area.

This measure provides energy savings by reducing the lighting operating hours.

Affected building areas: offices, conference rooms, classrooms, gymnasium, library, restrooms, and storage rooms.





4.3 Variable Frequency Drives (VFD)

#	Energy Conservation Measure	Savings	Peak Deman d Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*		K	CO₂e
Variable	e Frequency Drive (VFD) Measures	49,462	14.0	0	\$5,808	\$41,559	\$3,760	\$37,799	6.5	49,808
ECM 4	Install VFDs on Constant Volume (CV) Fans	49,462	14.0	0	\$5,808	\$41,559	\$3,760	\$37,799	6.5	49,808

Variable frequency drives (VFDs) control motors for fans, pumps, and process equipment based on the actual output required of the driven equipment. Energy savings result from more efficient control of motor energy usage when equipment operates at partial load. The magnitude of energy savings depends on the estimated amount of time that the motor would operate at partial load. For equipment with proposed VFDs, we have included replacing the controlled motor with a new motor to conservatively account for the cost of an inverter duty rated motor.

Premium efficiency motors have been proposed to be installed only in conjunction with proposed VFD motor measures. Non-inverter duty rated motors will need to be replaced when the VFD measure is implemented.

ECM 4: Install VFDs on Constant Volume (CV) Fans

Install VFDs to control constant volume fan motor speeds. This converts a constant-volume, single-zone air handling system into a variable-air-volume (VAV) system. A separate VFD is usually required to control the return fan motor or dedicated exhaust fan motor, if the air handler has one.

Zone thermostats signal the VFD to adjust fan speed to maintain the appropriate temperature in the zone while maintaining a constant supply air temperature.

For air handlers with direct expansion (DX) cooling systems, the minimum air flow across the cooling coil required to prevent the coil from freezing must be determined during the final project design. The control system programming should maintain the minimum air flow whenever the compressor is operating. Prior to implementation, verify minimum fan speed in cooling mode with the manufacturer. Note that savings will vary depending on the operating characteristics of each AHU.

Energy savings result from reducing the fan speed (and power) when conditions allow for reduced air flow.

Affected air handlers: ERV 1-5.





4.4 Domestic Water Heating

#	Energy Conservation Measure	Electric Savings	Peak Deman d Savings (kW)	Annual Fuel Savings (MMBtu)	Savings	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)	K	CO2e
Domes	tic Water Heating Upgrade	0	0.0	62	\$642	\$11,608	\$398	\$11,210	17.5	7,291
ECM 5	Install High Efficiency Gas-Fired Water Heater	0	0.0	20	\$202	\$11,500	\$398	\$11,102	55.0	2,291
ECM 6	Install Low-Flow DHW Devices	0	0.0	43	\$440	\$108	\$0	\$108	0.2	5,000

ECM 5: Install High-Efficiency Gas-Fired Water Heater

We evaluated replacing the existing tank water heater with a high-efficiency tank water heater. Energy savings result from the increased efficiency of the unit, which uses less gas to heat water, and fewer operating hours to maintain the tank water temperature.

ECM 6: Install Low-Flow DHW Devices

Install low-flow devices to reduce overall hot water demand. The following low-flow devices are recommended to reduce hot water usage:

Device	Flow Rate
Faucet aerators (lavatory)	0.5 gpm
Faucet aerator (kitchen)	1.5 gpm
Showerhead	2.0 gpm
Pre-rinse spray valve (kitchen)	1.28 gpm

Low-flow devices reduce the overall water flow from the fixture while still providing adequate pressure for washing. Pre-rinse spray valves (PRSVs)—often used in commercial and institutional kitchens—remove food waste from dishes prior to dishwashing.

Additional cost savings may result from reduced water usage.





4.5 Food Service & Refrigeration Measures

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Deman d Savings (kW)	Fuel Savings	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)		Estimated Net Cost (\$)	k	CO ₂ e Emissions Reduction (lbs)
Food Se	ervice & Refrigeration Measures	3,224	0.4	0	\$379	\$460	\$100	\$360	1.0	3,246
ECM 7	Vending Machine Control	3,224	0.4	0	\$379	\$460	\$100	\$360	1.0	3,246

ECM 7: Vending Machine Control

Vending machines operate continuously, even during unoccupied hours. Install occupancy sensor controls to reduce energy use. These controls power down vending machines when the vending machine area has been vacant for some time and power up the machines at necessary regular intervals or when the surrounding area is occupied. Energy savings are dependent on the vending machine and activity level in the area surrounding the machines.





5 ENERGY EFFICIENT BEST PRACTICES

A whole building maintenance plan will extend equipment life; improve occupant comfort, health, and safety; and reduce energy and maintenance costs. You may already be doing some of these things— see our list below for potential additions to your maintenance plan. Be sure to consult with qualified equipment specialists for details on proper maintenance and system operation.

Energy Tracking with ENERGY STAR® Portfolio Manager®



You've heard it before - you can't manage what you don't measure. ENERGY STAR® Portfolio Manager® is an online tool that you can use to measure and track energy and water consumption, as well as greenhouse gas emissions⁴. Your account has already been established. Now you can continue to keep tabs on your energy performance every month.

Lighting Controls

As part of a lighting maintenance schedule, test lighting controls to ensure proper functioning. For occupancy sensors, this requires triggering the sensor and verifying that the sensor's timer settings are correct. For daylight and photocell sensors, maintenance involves cleaning sensor lenses and confirming that setpoints and sensitivity are configured properly.

Motor Maintenance

Motors have many moving parts. As these parts degrade over time, the efficiency of the motor is reduced. Routine maintenance prevents damage to motor components. Routine maintenance should include cleaning surfaces and ventilation openings on motors to prevent overheating, lubricating moving parts to reduce friction, inspecting belts and pulleys for wear and to ensure they are at proper alignment and tension, and cleaning and lubricating bearings. Consult a licensed technician to assess these and other motor maintenance strategies.

Thermostat Schedules and Temperature Resets



Use thermostat setback temperatures and schedules to reduce heating and cooling energy use during periods of low or no occupancy. Thermostats should be programmed for a setback of 5-10°F during low occupancy hours (reduce heating setpoints and increase cooling setpoints). Cooling load can be reduced by increasing the facility's occupied setpoint temperature. In general, during the cooling season, thermostats should be set as high as possible without sacrificing occupant comfort.

AC System Evaporator/Condenser Coil Cleaning

Dirty evaporator and condenser coils restrict air flow and restrict heat transfer. This increases the loads on the evaporator and condenser fan, and decreases overall cooling system performance. Keeping the coils clean allows the fans and cooling system to operate more efficiently.

https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/use-portfolio-manager.





HVAC Filter Cleaning and Replacement

Air filters should be checked regularly (often monthly) and cleaned or replaced when appropriate. Air filters reduce indoor air pollution, increase occupant comfort, and help keep equipment operating efficiently. If the building has a building management system, consider installing a differential pressure switch across filters to send an alarm about premature fouling or overdue filter replacement. Over time, filters become less and less effective as particulate buildup increases. Dirty filters also restrict air flow through the air conditioning or heat pump system, which increases the load on the distribution fans.

Boiler Maintenance


Many boiler problems develop slowly over time, so regular inspection and maintenance is essential to keeping the heating system running efficiently and preventing expensive repairs. Annual tune-ups should include a combustion analysis to analyze the exhaust from the boilers and to ensure the boiler is operating safely. Boilers should be cleaned according to the manufacturer's instructions to remove soot and scale from the water side or fire side of the boiler.

Water Heater Maintenance

Preventative maintenance can extend the life of the system, maintain energy efficiency, and ensure safe operation. At least once a year, follow manufacturer instructions to drain a few gallons out of the water heater using the drain valve. If there is a lot of sediment or debris, then a full flush is recommended. Turn the temperature down and then completely drain the tank. Annual checks should include checks for:

- Leaks or heavy corrosion on the pipes and valves.
- Corrosion or wear on the gas line and on the piping. If you noticed any black residue, soot, or charred metal, this is a sign you may be having combustion issues and you should have the unit serviced by a professional.
- For electric water heaters, look for signs of leaking such as rust streaks or residue around the upper and lower panels covering the electrical components on the tank.
- For water heaters more than three years old, have a technician inspect the sacrificial anode annually.

Plug Load Controls



Reducing plug loads is a common way to decrease your electrical use. Limiting the energy use of plug loads can include increasing occupant awareness, removing under-used equipment, installing hardware controls, and using software controls. Consider enabling the most aggressive power settings on existing devices or install load sensing or occupancy sensing (advanced) power strips⁵. Your local utility may offer incentives or rebates for this equipment.

⁵ For additional information refer to "Assessing and Reducing Plug and Process Loads in Office Buildings" http://www.nrel.gov/docs/fy13osti/54175.pdf, or "Plug Load Best Practices Guide" http://www.advancedbuildings.net/plug-load-best-practices-guide-offices.





Water Conservation



Installing dual flush or low-flow toilets and low-flow/waterless urinals are ways to reduce water use. The EPA WaterSense™ ratings for urinals is 0.5 gallons per flush (gpf) and for flush valve toilets is 1.28 gpf (this is lower than the current 1.6 gpf federal standard).

For more information regarding water conservation go to the EPA's WaterSense™ website⁶ or download a copy of EPA's "WaterSense™ at Work: Best Management Practices for Commercial and Institutional Facilities"⁷ to get ideas for creating a water

management plan and best practices for a wide range of water using systems.

Water conservation devices that do not reduce hot water consumption will not provide energy savings at the site level, but they may significantly affect your water and sewer usage costs. Any reduction in water use does however ultimately reduce grid-level electricity use since a significant amount of electricity is used to deliver water from reservoirs to end users.

If the facility has detached buildings with a master water meter for the entire campus, check for unnatural wet areas in the lawn or water seeping in the foundation at water pipe penetrations through the foundation. Periodically check overnight meter readings when the Elementary School is unoccupied, and there is no other scheduled water usage.

Manage irrigation systems to use water more effectively outside the building. Adjust spray patterns so that water lands on intended lawns and plantings and not on pavement and walls. Consider installing an evapotranspiration irrigation controller that will prevent over-watering.

Procurement Strategies

Purchasing efficient products reduces energy costs without compromising quality. Consider modifying your procurement policies and language to require ENERGY STAR® or WaterSense™ products where available.

⁶ https://www.epa.gov/watersense

⁷ https://www.epa.gov/watersense/watersense-work-0





6 ON-SITE GENERATION

You don't have to look far in New Jersey to see one of the thousands of solar electric systems providing clean power to homes, businesses, schools, and government buildings. On-site generation includes both renewable (e.g., solar, wind) and non-renewable (e.g., fuel cells) technologies that generate power to meet all or a portion of the Elementary School's electric energy needs. Also referred to as distributed generation, these systems contribute to greenhouse gas (GHG) emission reductions, demand reductions and reduced customer electricity purchases, which results in improved electric grid reliability through better use of transmission and distribution systems.

Preliminary screenings were performed to determine if an on-site generation measure could be a costeffective solution for the Elementary School. Before deciding to install an on-site generation system, we recommend conducting a feasibility study to analyze existing energy profiles, siting, interconnection, and the costs associated with the generation project including interconnection costs, departing load charges, and any additional special facilities charges.





6.1 Solar Photovoltaic

Photovoltaic (PV) panels convert sunlight into electricity. Individual panels are combined into an array that produces direct current (DC) electricity. The DC current is converted to alternating current (AC) through an inverter. The inverter is then connected to the building's electrical distribution system.

A preliminary screening based on the Elementary School's electric demand, size and location of free area, and shading elements shows that the facility has **high** potential for installing additional PV arrays.

The amount of free area, ease of installation (roof) and the lack of shading elements contribute to the high potential. Expanding the PV array on the roof or parking lot may be feasible. If you are interested in pursuing the installation of PV, we recommend conducting a full feasibility study.

The graphic below displays the results of the PV potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

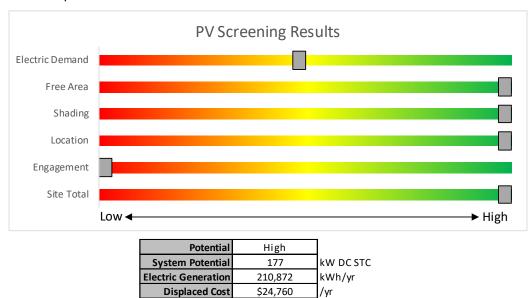


Figure 9 - Photovoltaic Screening

\$460,200

Solar Renewable Energy Certificate (SREC) Registration Program (SRP)

Installed Cost

Rebates are not available for solar projects, but owners of solar projects MUST register their projects in the SREC Registration Program before starting construction. Once your PV system is up and running, you periodically earn credits, which can then be sold on the open market for up to 15 years.

If you are considering installing solar photovoltaics on your building, visit www.njcleanenergy.com/srec for more information about the SREC Registration Program.

Get more information about solar power in New Jersey or find a qualified solar installer who can help you decide if solar is right for your building:

- Basic Info on Solar PV in New Jersey: www.njcleanenergy.com/whysolar
- **New Jersey Solar Market FAQs**: <u>www.njcleanenergy.com/renewable-energy/program-updates-and-background-information/solar-transition/solar-market-faqs</u>
- Approved Solar Installers in the New Jersey Market: www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/?id=60&start=1





6.2 Combined Heat and Power

Combined heat and power (CHP) generate electricity at the Elementary School and puts waste heat energy to good use. Common types of CHP systems are reciprocating engines, microturbines, fuel cells, backpressure steam turbines, and (at large facilities) gas turbines.


CHP systems typically produce a portion of the electric power used on-site, with the balance of electric power needs supplied by the local utility company. The heat is used to supplement (or replace) existing boilers and provide space heating and/or domestic hot water heating. Waste heat can also be routed through absorption chillers for space cooling.

The key criteria used for screening is the amount of time that the CHP system would operate at full load and the facility's ability to use the recovered heat. Facilities with a continuous need for large quantities of waste heat are the best candidates for CHP.

A preliminary screening based on heating and electrical demand, siting, and interconnection shows that the facility has **no** potential for installing a cost-effective CHP system.

Low or infrequent thermal load, and lack of space for siting the equipment are the most significant factors contributing to the lack of CHP potential.

The graphic below displays the results of the CHP potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

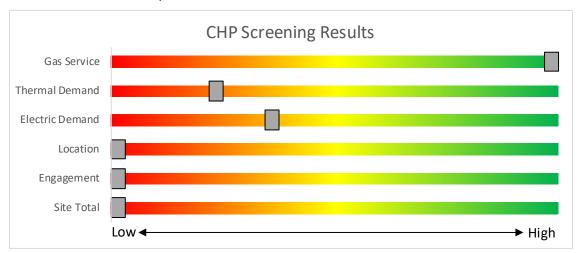

Potential	None	
System Type	None	
System Potential	50	kW
Electric Generation	115,884	kWh/yr
Thermal Generation	738,224	MBtu/yr
Displaced Cost	\$7,812	/yr
Installed Cost	\$224,000	

Figure 10 - Combined Heat and Power Screening

Find a qualified firm that specializes in commercial CHP cost assessment and installation: http://www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved vendorsearch/.





7 Project Funding and Incentives

Ready to improve your building's performance? Pick the program that works best for you. Incentive programs that may apply to the Elementary School are identified in the Executive Summary. This section provides an overview of currently available New Jersey's Clean Energy Programs.

	SmartStart Flexibility to install at your own pace	Direct Install Turnkey installation	Pay for Performance Whole building upgrades
Who should use it?	Buildings installing individual measures or small group of measures.	Small to mid-size facilities that can bundle multiple measures together.	Mid to large size facilities looking to implement as many measures as possible at one time.
		Average peak demand should be below 200 kW.	Peak demand should be over 200 kW.
		Not suitable for significant building shell issues.	
How does it work?	Use in-house staff or your preferred contractor.	Pre-approved contractors pass savings along to you via reduced material and labor costs.	Whole-building approach to energy upgrades designed to reduce energy use by at least 15%. The more you save, the higher the incentives.
What are the Incentives?	Fixed incentives for specific energy efficiency measures.	Incentives pay up to 70% of eligible costs, up to \$125,000 per project.	Up to 25% of installation cost, calculated based on level of energy savings per
		You pay the remaining 30% directly to the contractor.	square foot.
How do I participate?	Submit an application for the specific equipment to be installed.	Contact a participating contractor in your region.	Contact a pre-qualified Partner to develop your Energy Reduction Plan and set your energy savings targets.

Take the next step by visiting **www.njcleanenergy.com** for program details, applications, and to contact a qualified contractor.





7.1 SmartStart



SmartStart offers incentives for installing prescriptive and custom energy efficiency measures at your facility. This program provides an effective mechanism for securing incentives for energy efficiency measures installed individually or as part of a package of energy upgrades. This program serves most common equipment types and sizes.

SmartStart routinely adds, removes, or modifies incentives from year-to-year for various energy efficient equipment based on market trends and new technologies.

Equipment with Prescriptive Incentives Currently Available:

Electric Chillers
Electric Unitary HVAC
Gas Cooling
Gas Heating
Gas Water Heating
Ground Source Heat Pumps
Lighting

Lighting Controls
Refrigeration Doors
Refrigeration Controls
Refrigerator/Freezer Motors
Food Service Equipment
Variable Frequency Drives

Incentives

The SmartStart Prescriptive program provides fixed incentives for specific energy efficiency measures. Prescriptive incentives vary by equipment type.

SmartStart Custom provides incentives for more unique or specialized technologies or systems that are not addressed through prescriptive incentives. Custom incentives are calculated at \$0.16/kWh and \$1.60/therm based on estimated annual savings. Incentives are capped at 50% of the total installed incremental project cost, or a project cost buy down to a one-year payback (whichever is less). Program incentives are capped at \$500,000 per electric account and \$500,000 per natural gas account, per fiscal year.

How to Participate

Submit an application for the specific equipment to be installed. Many applications are designed as rebates, although others require application approval prior to installation. You can work with your preferred contractor or use internal staff to install measures.

Visit <u>www.njcleanenergy.com/SSB</u> for a detailed program description, instructions for applying, and applications.





7.2 Direct Install



Direct Install is a turnkey program available to existing small to medium-sized facilities with an average peak electric demand that does not exceed 200 kW over the recent 12-month period. You work directly with a preapproved contractor who will perform a free energy assessment at your facility, identify specific eligible measures, and provide a clear scope of work for

installation of selected measures. Energy efficiency measures may include lighting and lighting controls, refrigeration, HVAC, motors, variable speed drives, and controls.

Incentives

The program pays up to 70% of the total installed cost of eligible measures, up to \$125,000 per project. Each entity is limited to incentives up to \$250,000 per fiscal year.

How to Participate

To participate in Direct Install, you will need to contact the participating contractor assigned to the region of the state where your facility is located. A complete list of Direct Install program partners is provided on the Direct Install website linked below. The contractor will be paid the measure incentives directly by the program, which will pass on to you in the form of reduced material and implementation costs. This means up to 70% of eligible costs are covered by the program, subject to program caps and eligibility, while the remaining 30% of the cost is paid to the contractor by the customer.

Detailed program descriptions and applications can be found at: www.njcleanenergy.com/DI.





7.3 Pay for Performance - Existing Buildings



Pay for Performance works for larger customers with a peak demand over 200 kW. The minimum installed scope of work must include at least two unique measures that results in at least 15% source energy savings, and lighting cannot make up the majority of the savings. P4P is a generally a good option for medium-to-large sized facilities looking to implement as many

measures as possible under a single project to achieve deep energy savings. This program has an added benefit of addressing measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program loan also use this program.

Incentives

Incentives are based on estimated and achieved energy savings ranging from \$0.18-\$0.22/kWh and \$1.80-\$2.50/therm, capped at the lesser of 50% total project cost, or \$1 million per electric account and \$1 million per natural gas account, per fiscal year, not to exceed \$2 million per project. An incentive of \$0.15/square foot is also available to offset the cost of developing the Energy Reduction Plan (see below) contingent on the project moving forward with measure installation.

How to Participate

Contact one of the pre-approved consultants and contractors ("Partners"). Under direct contract to you, they will help further evaluate the measures identified in this report through development of the energy reduction plan, assist you in implementing selected measures, and verify actual savings one year after the installation. Your Partner will also help you apply for incentives.

Approval of the final scope of work is required by the program prior to installation. Installation can be done by the contractor of your choice (some P4P Partners are also contractors) or by internal staff, but the Partner remains involved throughout construction to ensure compliance with the program requirements.

Detailed program descriptions, instructions for applying, applications and list of Partners can be found at: www.njcleanenergy.com/P4P.





7.4 Combined Heat and Power

The Combined Heat & Power (CHP) program provides incentives for eligible CHP or waste heat to power (WHP) projects. Eligible CHP or WHP projects must achieve an annual system efficiency of at least 65% (lower heating value, or LHV), based on total energy input and total utilized energy output. Mechanical energy may be included in the efficiency evaluation.

Incentives

Eligible Technologies	Size (Installed Rated Capacity) ¹	Incentive (\$/kW)	% of Total Cost Cap per Project ³	\$ Cap per Project ³
Powered by non- renewable or renewable fuel source ⁴	≤500 KW	\$2,000	30-40% ²	\$2 million
Gas Internal Combustion Engine	>500 kW - 1 MW	\$1,000		
Gas Combustion Turbine	> 1 MW - 3 MW	\$550		
Microturbine Fuel Cells with Heat Recovery	>3 MW	\$350	30%	\$3 million
	<1 MW	\$1,000		\$2 million
Waste Heat to Power*	> 1MW	\$500	30%	\$3 million

[&]quot;Waste Heat to Power: Powered by non-renewable fuel source, heat recovery or other mechanical recovery from existing equipment utilizing new electric generation equipment (e.g. steam turbine).

Check the NJCEP website for details on program availability, current incentive levels, and requirements.

How to Participate

You work with a qualified developer or consulting firm to complete the CHP application. Once the application is approved the project can be installed. Information about the CHP program can be found at: www.njcleanenergy.com/CHP.





7.5 Energy Savings Improvement Program

The Energy Savings Improvement Program (ESIP) serves New Jersey's government agencies by financing energy projects. An ESIP is a type of performance contract, whereby school districts, counties, municipalities, housing authorities and other public and state entities enter in to contracts to help finance building energy upgrades. Annual payments are lower than the savings projected from the ECMs, ensuring that ESIP projects are cash flow positive for the life of the contract.

ESIP provides government agencies in New Jersey with a flexible tool to improve and reduce energy usage with minimal expenditure of new financial resources. NJCEP incentive programs described above can also be used to help further reduce the total project cost of eligible measures.

How to Participate

This LGEA report is the first step to participating in ESIP. Next, you will need to select an approach for implementing the desired ECMs:

- (1) Use an energy services company or "ESCO."
- (2) Use independent engineers and other specialists, or your own qualified staff, to provide and manage the requirements of the program through bonds or lease obligations.
- (3) Use a hybrid approach of the two options described above where the ESCO is used for some services and independent engineers, or other specialists or qualified staff, are used to deliver other requirements of the program.

After adopting a resolution with a chosen implementation approach, the development of the energy savings plan (ESP) can begin. The ESP demonstrates that the total project costs of the ECMs are offset by the energy savings over the financing term, not to exceed 15 years. The verified savings will then be used to pay for the financing.

The ESIP approach may not be appropriate for all energy conservation and energy efficiency improvements. Carefully consider all alternatives to develop an approach that best meets your needs. A detailed program descriptions and application can be found at: www.njcleanenergy.com/ESIP.

ESIP is a program delivered directly by the NJBPU and is not an NJCEP incentive program. As mentioned above, you can use NJCEP incentive programs to help further reduce costs when developing the energy savings plan. Refer to the ESIP guidelines at the link above for further information and guidance on next steps.





7.6 SREC Registration Program

The SREC (Solar Renewable Energy Certificate) Registration Program (SRP) is used to register the intent to install solar projects in New Jersey. Rebates are not available for solar projects, but owners of solar projects *must* register their projects prior to the start of construction to establish the project's eligibility to earn SRECs. Registration of the intent to participate in New Jersey's solar marketplace provides market participants with information about the pipeline of anticipated new solar capacity and insight into future SREC pricing.

After the registration is accepted, construction is complete, and final paperwork has been submitted and is deemed complete, the project is issued a New Jersey certification number, which enables it to generate New Jersey SRECs. SREC's are generated once the solar project has been authorized to be energized by the Electric Distribution Company (EDC).

Each time a solar installation generates 1,000 kilowatt-hours (kWh) of electricity, an SREC is earned. Solar project owners report the energy production to the SREC Tracking System. This reporting allows SREC's to be placed in the customer's electronic account. SRECs can then be sold on the SREC Tracking System, providing revenue for the first 15 years of the project's life.

Electricity suppliers, the primary purchasers of SRECs, are required to pay a Solar Alternative Compliance Payment (SACP) if they do not meet the requirements of New Jersey's Solar Renewable Portfolio Standard. Purchasing SRECs can help them meet those requirements. As SRECs are traded in a competitive market, the price may vary significantly. The actual price of an SREC during a trading period fluctuates depending on supply and demand.

Information about the SRP can be found at: www.njcleanenergy.com/srec.





8 ENERGY PURCHASING AND PROCUREMENT STRATEGIES

8.1 Retail Electric Supply Options

Energy deregulation in New Jersey has increased energy buyers' options by separating the function of electricity distribution from that of electricity supply. So, though you may choose a different company from which to buy your electric power, responsibility for the Elementary School's interconnection to the grid and repair to local power distribution will still reside with the traditional utility company serving your region.

If your facility is not purchasing electricity from a third-party supplier, consider shopping for a reduced rate from third-party electric suppliers. If your facility already buys electricity from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party electric suppliers is available at the NJBPU website⁸.

8.2 Retail Natural Gas Supply Options

The natural gas market in New Jersey is also deregulated. Most customers that remain with the utility for natural gas service pay rates that are market-based and that fluctuate monthly. The utility provides basic gas supply service (BGSS) to customers who choose not to buy from a third-party supplier for natural gas commodity.

A customer's decision about whether to buy natural gas from a retail supplier typically depends on whether a customer prefers budget certainty and/or longer-term rate stability. Customers can secure longer-term fixed prices by signing up for service through a third-party retail natural gas supplier. Many larger natural gas customers may seek the assistance of a professional consultant to assist in their procurement process.

If your facility does not already purchase natural gas from a third-party supplier, consider shopping for a reduced rate from third-party natural gas suppliers. If your facility already purchases natural gas from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party natural gas suppliers is available at the NJBPU website⁹.

⁸ www.state.nj.us/bpu/commercial/shopping.html

⁹ www.state.nj.us/bpu/commercial/shopping.html





APPENDIX A: EQUIPMENT INVENTORY & RECOMMENDATIONS

Lighting Inventory & Recommendations

LIGITUING IIIV		ry & Recommenda g Conditions	tions				Proposed Conditions						Energy la	mpact & F	inancial /	nalysis					
Location	Fixture Quantit y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Boilerroom	11	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2	Relamp	No	11	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,622	0.3	1,047	0	\$121	\$402	\$110	2.4
Boilerroom	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Faculty planning	8	Linear Fluores cent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2, 3	Relamp	Yes	8	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.2	969	0	\$112	\$562	\$115	4.0
Women's restroom	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	8	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.2	525	0	\$61	\$292	\$80	3.5
Men's restrom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.0	66	0	\$8	\$37	\$10	3.5
CR 207	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR 206	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR 205	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR 204	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR 203	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR 202	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR 201	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR 200	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
208 SGI	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	8	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.2	525	0	\$61	\$292	\$80	3.5
Girls 2nd floor	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L Linear Fluorescent - T8: 4' T8	Occupanc y Sensor	S	62	1,809	2	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.1	394	0	\$45	\$219	\$60	3.5
Custodian closet	2	(32W) - 2L Linear Fluorescent - T8: 4' T8	Occupanc y Sensor	S	62	1,809	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.0	131	0	\$15	\$73	\$20	3.5
Boys 2nd floor	6	(32W) - 2L Linear Fluorescent - T8: 4' T8	Occupanc y Sensor Occupanc	S	62	1,809	2	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.1	394	0	\$45	\$219	\$60	3.5
2nd floor hallway	18	(32W) - 2L	y Sensor	S	62	1,809	2	Relamp	No	18	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.4	1,182	0	\$136	\$657	\$180	3.5
2nd floor hallway	6	Exit Signs: LED - 2 W Lamp Linear Fluorescent - T8: 4' T8	None Wall		6	8,760		None	No	6	Exit Signs: LED - 2 W Lamp	None Wall	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Stairwell A	4	(32W) - 2L	Switch	S	62	2,622	2	Relamp	No	4	LED - Linear Tubes: (2) 4' Lamps	Switch	29	2,622	0.1	381	0	\$44	\$146	\$40	2.4
Stairwell A	1	Exit Signs: LED - 2 W Lamp Linear Fluorescent - T8: 4' T8	None Wall		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None Wall	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Elevator machine room	3	(32W) - 2L Linear Fluorescent - T8: 4' T8	Switch	S	62	2,622	2	Relamp	No	3	LED - Linear Tubes: (2) 4' Lamps	Switch	29	2,622	0.1	285	0	\$33	\$110	\$30	2.4
Elevator	2	(32W) - 2L Linear Fluorescent - T8: 4' T8	None	S	62	2,622	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	None	29	2,622	0.0	190	0	\$22	\$73	\$20	2.4
CR 107	12	(32W) - 2L Linear Fluorescent - T8: 4' T8	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR 106	12	(32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5





	Existing	g Conditions					Prop	osed Conditio	ns						Energy Ir	npact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
CR 105	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR 104	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR 103	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
Stairwell B	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2	Relamp	No	4	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,622	0.1	381	0	\$44	\$146	\$40	2.4
Stairwell B	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
CR 102	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR 101	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR 100	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
Girls 1st floor	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.1	394	0	\$45	\$219	\$60	3.5
Boys 1st floor	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.1	394	0	\$45	\$219	\$60	3.5
108 SGI	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	8	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.2	525	0	\$61	\$292	\$80	3.5
Custodian closet 1st floor	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.0	131	0	\$15	\$73	\$20	3.5
1st floor hall	18	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	18	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.4	1,182	0	\$136	\$657	\$180	3.5
1st floor hall	6	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	6	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Teachers mail room	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,809	2	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,809	0.1	197	0	\$23	\$110	\$30	3.5
Teachers mail room	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Gym	22	Linear Fluorescent - T5: 4' T5 (28W) - 4L	Occupanc y Sensor	S	120	1,809	2	Relamp	No	22	LED - Linear Tubes: (4) 4' Lamps	Occupanc y Sensor	58	1,809	1.0	2,714	-1	\$313	\$1,607	\$440	3.7
Gym	5	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	5	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Gym office	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	5	93	1,809	2	Relamp	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,809	0.1	295	0	\$34	\$164	\$45	3.5
Gym office	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Occupanc y Sensor	S	33	1,809	2	Relamp	No	1	LED - Linear Tubes: (2) 2' Lamps	Occupanc y Sensor	17	1,809	0.0	32	0	\$4	\$33	\$6	7.2
Gym toilet	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.0	131	0	\$15	\$73	\$20	3.5
Gym storage	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	5	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.1	328	0	\$38	\$183	\$50	3.5
Stage	13	Compact Fluorescent: Decorative fixture 4 pin - 6 lamps	Wall Switch	S	192	2,622	2	Relamp	No	13	LED Lamps: Decorative fixture 4 pin - 6 lamps	Wall Switch	134	2,622	0.5	2,159	0	\$249	\$1,344	\$78	5.1
Lift area	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,622	0.0	95	0	\$11	\$37	\$10	2.4
Lift area	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0





	Existin	g Conditions					Prop	osed Conditio	ns						Energy Ir	npact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
134 A Music	17	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2, 3	Relamp	Yes	17	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.5	2,058	0	\$237	\$891	\$205	2.9
134 A Music	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
123 Art	18	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2, 3	Relamp	Yes	18	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.5	2,180	0	\$251	\$927	\$215	2.8
123 Art	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
CR 122	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
Custdian closet	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.0	66	0	\$8	\$37	\$10	3.5
Women's 1st floor	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.1	394	0	\$45	\$219	\$60	3.5
Supply room	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,622	0.0	95	0	\$11	\$37	\$10	2.4
Hall by gym	23	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Occupanc y Sensor	S	33	1,809	2	Relamp	No	23	LED - Linear Tubes: (2) 2' Lamps	Occupanc y Sensor	17	1,809	0.3	732	0	\$84	\$748	\$138	7.2
Hall by gym	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Media Center	6	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	2,622	2, 3	Relamp	Yes	6	LED - Linear Tubes: (2) 2' Lamps	Occupanc y Sensor	17	1,809	0.1	368	0	\$42	\$195	\$36	3.8
Media Center	57	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2, 3	Relamp	Yes	57	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	1.7	6,902	-1	\$796	\$2,891	\$675	2.8
Media Center	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Media Center	6	Compact Fluores cent: Cane lights - 1 lamp	Wall Switch	S	26	2,622	2, 3	Relamp	Yes	6	LED Lamps: Cane lights - 1 lamp	Occupanc y Sensor	18	1,809	0.1	233	0	\$27	\$103	\$6	3.6
Media center storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.0	131	0	\$15	\$73	\$20	3.5
Librarian	4	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,809	2	Relamp	No	4	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,809	0.1	394	0	\$45	\$219	\$60	3.5
MC storage 2	4	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,809	2	Relamp	No	4	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,809	0.1	394	0	\$45	\$219	\$60	3.5
Music storage	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	4	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.1	263	0	\$30	\$146	\$40	3.5
Cafeteria	9	Compact Fluorescent: Decorative dome 4 pin - 6 lamps	Wall Switch	S	192	2,622	2, 3	Relamp	Yes	9	LED Lamps: Decorative dome 4 pin - 6 lamps	Occupanc y Sensor	134	1,809	0.6	2,576	-1	\$297	\$1,200	\$89	3.7
Cafeteria	4	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	4	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Cafeteria	11	LED - Fixtures: Decorative dome 4 pin - 6 lamps	Wall Switch	S	60	2,622	3	None	Yes	11	LED - Fixtures: Decorative dome 4 pin - 6 lamps	Occupanc y Sensor	60	1,809	0.1	590	0	\$68	\$270	\$35	3.5
Platform storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.0	131	0	\$15	\$73	\$20	3.5
Receiving	10	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2, 3	Relamp	Yes	10	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	1,211	0	\$140	\$635	\$135	3.6
Receiving	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
17 Vestibule	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	2,622	2	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	2,622	0.0	143	0	\$16	\$55	\$15	2.4





	Existing	g Conditions					Prop	osed Conditio	ns						Energy In	npact & F	inancial A	Analysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
17 Vestibule	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Electrical Utilities	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	s	62	1,809	2	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.1	394	0	\$45	\$219	\$60	3.5
Telephone room	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2, 3	Relamp	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.2	727	0	\$84	\$489	\$95	4.7
Telephone room	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	15	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,809	2	Relamp	No	15	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,809	0.5	1,477	0	\$170	\$822	\$225	3.5
Kitchen	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Non-food storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,809	2	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,809	0.1	197	0	\$23	\$110	\$30	3.5
Women's restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.0	66	0	\$8	\$37	\$10	3.5
Dry food storage	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.1	394	0	\$45	\$219	\$60	3.5
Kitchen office	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,809	2	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,809	0.1	197	0	\$23	\$110	\$30	3.5
Janitor's closet	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.0	66	0	\$8	\$37	\$10	3.5
Kitchen hood	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2	Relamp	No	4	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,622	0.1	381	0	\$44	\$146	\$40	2.4
Serving area	8	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	2,622	2, 3	Relamp	Yes	8	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,809	0.4	1,453	0	\$167	\$708	\$155	3.3
Faculty dining	6	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,809	2	Relamp	No	6	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,809	0.2	591	0	\$68	\$329	\$90	3.5
Faculty dining	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Main lobby	4	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	2,622	2	Relamp	No	4	LED - Linear Tubes: (2) 2' Lamps	Wall Switch	17	2,622	0.0	185	0	\$21	\$130	\$24	5.0
Main lobby	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Main lobby	4	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	2,622	2	Relamp	No	4	LED - Linear Tubes: (2) 2' Lamps	Wall Switch	17	2,622	0.0	185	0	\$21	\$130	\$24	5.0
Main entrance	4	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	2,622	2	Relamp	No	4	LED - Linear Tubes: (2) 2' Lamps	Wall Switch	17	2,622	0.0	185	0	\$21	\$130	\$24	5.0
Main entrance	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Main office	11	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2, 3	Relamp	Yes	11	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	1,332	0	\$154	\$672	\$145	3.4
Main office	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Main office kitchen	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2	Relamp	No	3	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,622	0.1	285	0	\$33	\$110	\$30	2.4
Main office closet	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	2,622	2, 3	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,809	0.1	363	0	\$42	\$226	\$30	4.7
Conference room	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	2,622	2, 3	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,809	0.1	363	0	\$42	\$226	\$50	4.2





	Existing	g Conditions					Prop	osed Conditio	ns						Energy Ir	npact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Guidance office	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,809	2	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,809	0.1	197	0	\$23	\$110	\$30	3.5
Guidance office	2	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Occupanc y Sensor	S	33	1,809	2	Relamp	No	2	LED - Linear Tubes: (2) 2' Lamps	Occupanc y Sensor	17	1,809	0.0	64	0	\$7	\$65	\$12	7.2
Principal's office	4	Linear Fluores cent - T8: 4' T8 (32W) - 3L	Occupanc y Sensor	S	93	1,809	2	Relamp	No	4	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,809	0.1	394	0	\$45	\$219	\$60	3.5
Child study	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	4	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.1	263	0	\$30	\$146	\$40	3.5
Toilet	1	Linear Fluores cent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,622	0.0	95	0	\$11	\$37	\$10	2.4
Nurse's office	7	Linear Fluores cent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2, 3	Relamp	Yes	7	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.2	848	0	\$98	\$526	\$105	4.3
Nurse's restroom	1	Linear Fluores cent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.0	66	0	\$8	\$37	\$10	3.5
Nurse's exam room	3	Linear Fluores cent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.1	363	0	\$42	\$226	\$50	4.2
Speech therapy	3	Linear Fluores cent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	2,622	2, 3	Relamp	Yes	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	1,809	0.1	545	0	\$63	\$280	\$65	3.4
Electrical closet	4	Linear Fluores cent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2	Relamp	No	4	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,622	0.1	381	0	\$44	\$146	\$40	2.4
Data closet	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.1	242	0	\$28	\$189	\$40	5.3
Hall by main office	16	Linear Fluores cent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	2,622	2, 3	Relamp	Yes	16	LED - Linear Tubes: (2) 2' Lamps	Occupanc y Sensor	17	1,809	0.2	981	0	\$113	\$790	\$131	5.8
Hall by main office	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
CR J	12	Linear Fluores cent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR A	12	(32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR B	12	Linear Fluores cent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
Vestibule 3	3	Linear Fluores cent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2	Relamp	No	3	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,622	0.1	285	0	\$33	\$110	\$30	2.4
Vestibule 3	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
CR C	12	Linear Fluores cent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR C restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Switch	29	2,622	0.0	95	0	\$11	\$37	\$10	2.4
CR D	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR D restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Switch	S	62	2,622	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Switch	29	2,622	0.0	95	0	\$11	\$37	\$10	2.4
CR E	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR E restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Switch	29	2,622	0.0	95	0	\$11	\$37	\$10	2.4
CR F	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5





	Existin	g Conditions					Prop	osed Conditio	ns						Energy Ir	npact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
CR F restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,622	0.0	95	0	\$11	\$37	\$10	2.4
CR G	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	s	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
CR G restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,622	0.0	95	0	\$11	\$37	\$10	2.4
Teachers room	9	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.2	591	0	\$68	\$329	\$90	3.5
Teachers room toilet	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.0	66	0	\$8	\$37	\$10	3.5
Vestibule 2	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2	Relamp	No	3	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,622	0.1	285	0	\$33	\$110	\$30	2.4
Vestibule 2	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
CR I	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.3	788	0	\$91	\$438	\$120	3.5
Pre K Boys restroom	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.1	394	0	\$45	\$219	\$60	3.5
Pre K Girls restroom	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.1	394	0	\$45	\$219	\$60	3.5
Custodian closet	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	2,622	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	2,622	0.0	190	0	\$22	\$73	\$20	2.4
N SGI	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	s	62	1,809	2	Relamp	No	8	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.2	525	0	\$61	\$292	\$80	3.5
O SGI	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	8	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.2	525	0	\$61	\$292	\$80	3.5
Alphabet Hall	19	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Occupanc y Sensor	S	62	1,809	2	Relamp	No	19	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	1,809	0.5	1,248	0	\$144	\$694	\$190	3.5
Alphabet Hall	6	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	6	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Area light	2	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Timecloc k		57	4,380		None	No	2	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Timecloc k	57	4,380	0.0	0	0	\$0	\$0	\$0	0.0
Wall pack	24	Metal Halide: (1) 70W Lamp	Photocell		95	4,380	1	Fixture Replacement	No	24	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell	29	4,380	0.8	6,990	0	\$821	\$23,183	\$2,400	25.3
Wall sconces	31	Compact Fluores cent: 4 pin - 1 lamp	Timecloc k		26	4,380	2	Relamp	No	31	LED Lamps: 4 pin - 1 lamp	Timecloc k	18	4,380	0.1	1,059	0	\$124	\$534	\$31	4.0
Parking lot	24	Metal Halide: (1) 400W Lamp	Photocell		458	4,380	1	Fixture Replacement	No	24	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell	137	4,380	3.8	33,701	0	\$3,957	\$23,183	\$2,400	5.3
Roadway	2	Metal Halide: (1) 400W Lamp	Photocell		458	4,380	1	Fixture Replacement	No	2	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell	137	4,380	0.3	2,808	0	\$330	\$1,932	\$200	5.3
Wall sconces	11	Compact Fluorescent: 4 pin - 1 lamp	Timecloc k		32	4,380	2	Relamp	No	11	LED Lamps: 4 pin - 1 lamp	Timecloc k	22	4,380	0.1	463	0	\$54	\$189	\$11	3.3
Table lamp	2	Incandescent: Screw-in1 lamp	Wall Switch	S	60	2,622	2	Relamp	No	2	LED Lamps: Screw-in 1 lamp	Wall Switch	9	2,622	0.1	294	0	\$34	\$34	\$2	1.0





Motor Inventory & Recommendations

			g Conditions						Prop	osed Co	ndition	S		Energy In	npact & Fir	nancial An	alysis			
Location	Area(s)/System(s) Served	Motor Quantit Y	Motor Application		Full Load Efficienc Y	VFD Control?	Remaining Useful Life	Annual Operating Hours	ECM #	Install High Efficienc y Motors?	Full Load Efficiency		Numbe r of VFDs	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Boiler room	DHW	1	Combustion Air Fan	0.3	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Boiler room	DHW Circulation	1	Water Supply Pump	0.8	60.0%	No	W	8,760		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Cooling tower fan	1	Cooling Tower Fan	10.0	91.7%	Yes	W	3,391		No	91.7%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	ERV 3	1	Exhaust Fan	7.5	87.0%	No	W	3,250	4	No	91.0%	Yes	1	2.4	8,458	0	\$993	\$4,738	\$600	4.2
Roof	ERV 3	1	Supply Fan	5.0	91.0%	No	W	3,250	4	No	91.0%	Yes	1	1.4	4,996	0	\$587	\$4,076	\$400	6.3
Roof	ERV 4	1	Exhaust Fan	3.0	88.0%	No	W	3,250	4	No	89.5%	Yes	1	0.9	3,193	0	\$375	\$3,812	\$240	9.5
Roof	ERV 4	1	Supply Fan	3.0	88.0%	No	W	3,250	4	No	89.5%	Yes	1	0.9	3,193	0	\$375	\$3,812	\$240	9.5
Roof	ERV 2	1	Exhaust Fan	5.0	88.0%	No	W	3,250	4	No	89.5%	Yes	1	1.5	5,322	0	\$625	\$4,197	\$400	6.1
Roof	ERV 2	1	Supply Fan	7.5	91.0%	No	W	3,250	4	No	91.7%	Yes	1	2.2	7,596	0	\$892	\$4,761	\$600	4.7
Roof	ERV 1	1	Exhaust Fan	5.0	89.0%	No	W	3,250	4	No	89.5%	Yes	1	1.5	5,159	0	\$606	\$4,197	\$400	6.3
Roof	ERV 1	1	Supply Fan	5.0	89.0%	No	W	3,250	4	No	89.5%	Yes	1	1.4	5,159	0	\$606	\$4,197	\$400	6.3
Boiler room	ERV 5	1	Exhaust Fan	3.0	88.0%	No	W	3,250	4	No	89.5%	Yes	1	0.9	3,193	0	\$375	\$3,884	\$240	9.7
Boiler room	ERV 5	1	Supply Fan	3.0	88.0%	No	W	3,250	4	No	89.5%	Yes	1	0.9	3,193	0	\$375	\$3,884	\$240	9.7
Boiler room	P 1,2	2	Heating Hot Water Pump	15.0	93.0%	Yes	W	980		No	93.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Boiler room	P 3,4	2	Water-Source Heat Pump Circulation Pump	10.0	91.7%	Yes	w	3,391		No	91.7%	No		0.0	0	0	\$0	\$0	\$0	0.0
Elevator machine room	Hydraulic pump	1	Process Pump	25.0	93.0%	No	W	500		No	93.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Various spaces	10	Exhaust Fan	0.3	60.0%	No	W	3,000		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Various	WSHP	57	Supply Fan	0.3	70.0%	No	W	3,250		No	70.0%	No		0.0	0	0	\$0	\$0	\$0	0.0





Electric HVAC Inventory & Recommendations

		Existin	g Conditions				Prop	osed Co	ndition	ıs					Energy In	ıpact & Fii	nancial An	alysis			
Location	Area(s)/System(s) Served	System Quantit Y	System Type	Cooling Capacit y per Unit (Tons)	Capacity	Remaining Useful Life	ECM #	Install High Efficienc y System?	System Quantit y	System Type	Cooling Capacit y per Unit (Tons)	Heating Capacity per Unit (MBh)	Cooling Mode Efficiency (SEER/EER)	Heating Mode Efficiency (COP)	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings	Installation		Simple Payback w/ Incentives in Years
Various spaces	Various spaces	8	Electric Resistance Heat		25.59	W		No							0.0	0	0	\$0	\$0	\$0	0.0
Classrooms	Classrooms	57	Water Source HP	2.50	8.53	W		No	-						0.0	0	0	\$0	\$0	\$0	0.0

Fuel Heating Inventory & Recommendations

		Existin	g Conditions			Prop	osed Co	nditio	ns			Energy In	pact & Fir	nancial An	alysis			
Location	Area(s)/System(s)	System Quantit Y	System Type		Remaining		Install High Efficienc y System?	у	System Type	Heating Efficienc Y	Efficienc	Total Peak	Total Annual kWh Savings			Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Boiler room 1	All building	1	Condensing Hot Water Boiler	######	W		No					0.0	0	0	\$0	\$0	\$0	0.0
Boiler room 2	All building	1	Condensing Hot Water Boiler	######	W		No					0.0	0	0	\$0	\$0	\$0	0.0

DHW Inventory & Recommendations

		Existin	g Conditions		Prop	osed Co	nditio	ns				Energy In	npact & Fir	nancial An	alysis			
Location	Area(s)/System(s) Served	System Quantit y	System Type	Remaining Useful Life		Replace?	System Quantit Y	System Type	Fuel Type			Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings			Simple Payback w/ Incentives in Years
Boiler room	Restrooms and sinks	1	Storage Tank Water Heater (> 50 Gal)	В	5	Yes	1	Storage Tank Water Heater (> 50 Gal)	Natural Gas	93.00%	Et	0.0	0	20	\$202	\$11,500	\$398	55.0

Low-Flow Device Recommendations

	Reco	mmeda	ation Inputs			Energy Im	pact & Fir	nancial An	alysis			
Location	ECM #	Device Quantit Y	Device Type	Existing Flow Rate (gpm)	Proposed Flow Rate (gpm)	Total Peak kW Savings	Total Annual kWh Savings			Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Restrooms	6	15	Faucet Aerator (Lavatory)	2.20	0.50	0.0	0	43	\$440	\$108	\$0	0.2





Walk-In Cooler/Freezer Inventory & Recommendations

	Existing Conditions		Proposed Conditions				Energy Impact & Financial Analysis							
Location	Cooler/ Freezer Quantit Y	Case	ECM #	Install EC Evaporator Fan Motors?	Install Electric Defrost Control?	Install Evaporator Fan Control?	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years	
Kitchen	1	Cooler (35F to 55F)		No	No	No	0.0	0	0	\$0	\$0	\$0	0.0	
Kitchen	1	Medium Temp Freezer (0F to 30F)		No	No	No	0.0	0	0	\$0	\$0	\$0	0.0	

Commercial Refrigerator/Freezer Inventory & Recommendations

	Existin	g Conditions	Proposed Conditions		Energy Impact & Financial Analysis							
Location	Quantit y	Refrigerator/ Freezer Type	ENERGY STAR Qualified?	ECM #	Install ENERGY STAR Equipment?	Total Peak kW Savings	kWh		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	1	Refrigerator Chest	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Stand-Up Refrigerator, Solid Door (31 - 50 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Stand-Up Freezer, Solid Door (16 - 30 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0

Commercial Ice Maker Inventory & Recommendations

	Existin	g Conditions		Proposed Conditions		Energy Impact & Financial Analysis							
Location	Quantit y	Ice Maker Type	ENERGY STAR Qualified?	ECM #	Install ENERGY STAR Equipment?	Total Peak kW Savings	kWh	Total Annual MMBtu Savings		Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years	
Kitchen	1	Ice Making Head (<450 Ibs/day), Batch	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0	





Cooking Equipment Inventory & Recommendations

Existing Conditions				Proposed Conditions Energy Impact & Financial Analysis								
Location	Quantity	Equipment Type	High Efficiency Equipement?	ECM #	Install High Efficiency Equipment?	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	2	Gas Combination Oven/Steam Cooker (<15 Pans)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	4	Gas Convection Oven (Full Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Gas Griddle (≤2 Feet Width)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Gas Steamer	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	6	Insulated Food Holding Cabinet (Full Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Insulated Food Holding Cabinet (Full Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0





Plug Load Inventory

	Existing Conditions									
Location	Location Quantit y Equipment Description		Energy Rate (W)	ENERGY STAR Qualified ?						
Joseph T Donahue ES	133	Desktop Computer	145.0	Yes						
Joseph T Donahue ES	5	Chrome book carts	70.0	Yes						
Joseph T Donahue ES	6	Servers	1,200.0	Yes						
Joseph T Donahue ES	45	Printer - Small	60.0	Yes						
Joseph T Donahue ES	9	Printer - Medium	80.0	Yes						
Joseph T Donahue ES	5	Printer - Big	200.0	Yes						
Joseph T Donahue ES	44	Projector	250.0	Yes						
Joseph T Donahue ES	6	Mi crowa ve	900.0	Yes						
Joseph T Donahue ES	2	Refrigerator - Small	60.0	Yes						
Joseph T Donahue ES	9	Refrigerator - Large	220.0	Yes						
Joseph T Donahue ES	5	Coffee Machine	400.0	Yes						
Joseph T Donahue ES	2	Toaster Oven	1,200.0	Yes						
Joseph T Donahue ES	4	Television - CRT/DLP	120.0	Yes						
Joseph T Donahue ES	3	LCD	110.0	Yes						
Joseph T Donahue ES	5	LED	90.0	Yes						
Joseph T Donahue ES	1	Hot/Cold Water Dispenser	520.0	Yes						
Joseph T Donahue ES	26	Smart board	5.0	Yes						





Vending Machine Inventory & Recommendations

	g Conditions	Proposed	Proposed Conditions Energ			Energy Impact & Financial Analysis						
Location	Quantit Y	Vending Machine Type	ECM #	Install Controls?	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years	
Teachers lounge	2	Refrigerated	7	Yes	0.4	3,224	0	\$379	\$460	\$100	1.0	





APPENDIX B: ENERGY STAR® STATEMENT OF ENERGY PERFORMANCE

EUI is presented in terms of *site energy* and *source energy*. Site energy is the amount of fuel and electricity consumed by a building as reflected in utility bills. Source energy includes fuel consumed to generate electricity consumed at the site, factoring in electric production and distribution losses for the region.



ENERGY STAR[®] Statement of Energy Performance

32

Joseph T Donahue Elementary School

Primary Property Type: K-12 School Gross Floor Area (ft²): 72,300

Built: 2008

Score¹

For Year Ending: January 31, 2019 Date Generated: July 13, 2019

1. The ENERGY STAR score is a 1-100 assessment of a building's energy efficiency as compared with similar buildings nationwide, adjusting for climate and business activity.

Property & Contact Information Property Address Property Owner Primary Contact Barnegat Township School District Joseph T Donahue Elementary School Stephen Brennan 200 Bengal Blvd 550 BARENGAT BLVD. NORTH 550 BARENGAT BLVD. NORTH Barnegat, New Jersey 08005 Barnegat, NJ 08005 Barnegat, NJ 08005 609-698-5800 SBRENNAN@BARNEGATSCHOOLS.COI Property ID: 7072045 Energy Consumption and Energy Use Intensity (EUI) Annual Energy by Fuel National Median Comparison Site EUI 1,738,832 (36%) Natural Gas (kBtu) National Median Site EUI (kBtu/ff²) 56 66 kBtu/ft2 Electric - Grid (kBtu) 3,032,646 (64%) National Median Source EUI (kBtu/ft²) 121.1 % Diff from National Median Source EUI 18% Annual Emissions Source EUI Greenhouse Gas Emissions (Metric Tons 400 142.7 kBtu/ft2 CO2e/year) Signature & Stamp of Verifying Professional __ (Name) verify that the above information is true and correct to the best of my knowledge. Signature: Date: Licensed Professional

Professional Engineer Stamp (if applicable)





APPENDIX C: GLOSSARY

Blended Rate Used to calculate fiscal savings associated with measures. The blended rate is calculated by dividing the amount of your bill by the total energy use. For example, if your bill is \$22,217.22, and you used 266,400 kilowatt-hours, your blended rate is 8.3 cents per kilowatt-hour. Btu British thermal unit: a unit of energy equal to the amount of heat required to increase the temperature of one pound of water by one-degree Fahrenheit. CHP Combined heat and power. Also referred to as cogeneration. COP Coefficient of performance: a measure of efficiency in terms of useful energy delivered divided by total energy input. Demand Response Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives. DCV Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency	TERM	DEFINITION					
the temperature of one pound of water by one-degree Fahrenheit. CHP Combined heat and power. Also referred to as cogeneration. COP Coefficient of performance: a measure of efficiency in terms of useful energy delivered divided by total energy input. Demand Response Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives. DCV Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure ERR Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® Is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.	Blended Rate	calculated by dividing the amount of your bill by the total energy use. For example, if your bill is \$22,217.22, and you used 266,400 kilowatt-hours, your blended rate is 8.3					
COP Coefficient of performance: a measure of efficiency in terms of useful energy delivered divided by total energy input. Demand Response Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives. DCV Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.	Btu						
Demand Response Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives. DCV Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.	СНР	Combined heat and power. Also referred to as cogeneration.					
buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives. DCV Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.	СОР						
Introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.	Demand Response	buildings/sites during peak energy use periods in response to time-based rates or other					
ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.	DCV						
ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.	US DOE	United States Department of Energy					
EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.	EC Motor	Electronically commutated motor					
EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.	ECM	Energy conservation measure					
Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.	EER						
building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.	EUI	=					
STAR® program is managed by the EPA.	Energy Efficiency	building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of					
EPA United States Environmental Protection Agency	ENERGY STAR®						
	EPA	United States Environmental Protection Agency					
Generation The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil).	Generation						
GHG Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from leaving Earth's atmosphere. The net effect is a trapping of absorbed radiation and a tendency to warm the planet's surface.	GHG	to long-wave (infrared) radiation, thus preventing long-wave radiant energy from leaving Earth's atmosphere. The net effect is a trapping of absorbed radiation and a					
gpf Gallons per flush	gpf	Gallons per flush					





gpm	Gallon per minute
HID	High intensity discharge: high-output lighting lamps such as high-pressure sodium, metal halide, and mercury vapor.
hp	Horsepower
HPS	High-pressure sodium: a type of HID lamp.
HSPF	Heating seasonal performance factor: a measure of efficiency typically applied to heat pumps. Heating energy provided divided by seasonal energy input.
HVAC	Heating, ventilating, and air conditioning
IHP 2014	US DOE Integral Horsepower rule. The current ruling regarding required electric motor efficiency.
IPLV	Integrated part load value: a measure of the part load efficiency usually applied to chillers.
kBtu	One thousand British thermal units.
kW	Kilowatt: equal to 1,000 Watts.
kWh	Kilowatt-hour: 1,000 Watts of power expended over one hour.
LED	Light emitting diode: a high-efficiency source of light with a long lamp life.
LGEA	Local Government Energy Audit
Load	The total power a building or system is using at any given time.
Measure	A single activity, or installation of a single type of equipment, that is implemented in a building system to reduce total energy consumption.
МН	Metal halide: a type of HID lamp.
MBh	Thousand Btu per hour
MBtu	One thousand British thermal units
MMBtu	One million British thermal units
MV	Mercury Vapor: a type of HID lamp.
NJBPU	New Jersey Board of Public Utilities
NJCEP	New Jersey's Clean Energy Program: NJCEP is a statewide program that offers financial incentives, programs and services for New Jersey residents, business owners and local governments to help them save energy, money and the environment.
psig	Pounds per square inch gauge.
Plug Load	Refers to the amount of power used in a space by products that are powered by means of an ordinary AC plug.
PV	Photovoltaic: refers to an electronic device capable of converting incident light directly into electricity (direct current).





SEER	Seasonal energy efficiency ratio: a measure of efficiency in terms of annual cooling energy provided divided by total electric input.
SEP	Statement of energy performance: a summary document from the ENERGY STAR® Portfolio Manager®.
Simple Payback	The amount of time needed to recoup the funds expended in an investment or to reach the break-even point between investment and savings.
SREC	Solar renewable energy credit: a credit you can earn from the state for energy produced from a photovoltaic array.
T5, T8, T12	A reference to a linear lamp diameter. The number represents increments of $1/8^{\text{th}}$ of an inch.
Temperature Setpoint	The temperature at which a temperature regulating device (thermostat, for example) has been set.
therm	100,000 Btu. Typically used as a measure of natural gas consumption.
tons	A unit of cooling capacity equal to 12,000 Btu/hr.
Turnkey	Provision of a complete product or service that is ready for immediate use
VAV	Variable air volume
VFD	Variable frequency drive: a controller used to vary the speed of an electric motor.
WaterSense™	The symbol for water efficiency. The WaterSense™ program is managed by the EPA.
Watt (W)	Unit of power commonly used to measure electricity use.







Local Government Energy Audit Report

Lillian M. Dunfee Elementary School October 31, 2019

Prepared for:

Barnegat Township School District 128 Barnegat Blvd. South Barnegat, New Jersey 08005 Prepared by:

TRC

900 Route 9 North

Woodbridge, New Jersey 07095

Disclaimer

The goal of this audit report is to identify potential energy efficiency opportunities, help prioritize specific measures for implementation, and provide information about financial incentives that may be available. Most energy conservation measures have received preliminary analysis of feasibility that identifies expected ranges of savings and costs. This level of analysis is usually considered sufficient to establish a basis for further discussion and to help prioritize energy measures.

TRC Companies, Inc. reviewed the energy conservation measures and estimates of energy savings were reviewed for technical accuracy. Actual, achieved energy savings depend on behavioral factors and other uncontrollable variables and, therefore, estimates of final energy savings are not guaranteed. TRC and the New Jersey Board of Public Utilities (NJBPU) shall in no event be liable should the actual energy savings vary.

TRC bases estimated installation costs on our experience at similar facilities, pricing from local contractors and vendors, and/or cost estimates from RS Means. We encourage the owner of the facility to independently confirm these cost estimates and to obtain multiple estimates when considering measure installations. Actual installation costs can vary widely based on individual measures and conditions. TRC and NJBPU do not guarantee installed cost estimates and shall in no event be held liable should actual installed costs vary from estimates.

New Jersey's Clean Energy Program (NJCEP) incentive values provided in this report are estimates based on program information available at the time of the report. Incentive levels are not guaranteed. The NJBPU reserves the right to extend, modify, or terminate programs without prior notice. Please review all available program incentives and eligibility requirements prior to selecting and installing any energy conservation measures.

The customer and their respective contractor(s) are responsible to implement energy conservation measures in complete conformance with all applicable local, state and federal requirements.

Copyright ©2019 TRC Companies, Inc. All rights reserved.

Reproduction or distribution of the whole, or any part of the contents of this document without written permission of TRC is prohibited. Neither TRC nor any of its employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any data, information, method, product or process disclosed in this document, or represents that its use will not infringe upon any privately-owned rights, including but not limited to, patents, trademarks or copyrights.





Table of Contents

1	1 Executive Summary					
	1.1	Planning Your Project	2			
	Pick \	Your Installation Approach				
		Options from Around the State				
2	Existing	g Conditions	7			
	2.1	Site Overview	7			
	2.2	Building Occupancy				
	2.3	Building Envelope	8			
	2.4	Lighting Systems				
	2.5	Air Handling Systems	10			
	Unit '	Ventilators	10			
		aged Units				
	Air C	onditioners	10			
	2.6	Heating Hot Water Systems				
	2.7	Building Energy Management Systems (EMS)				
	2.8	Domestic Hot Water				
	2.9	Food Service Refrigeration Equipment				
	2.10 2.11	Plug Load & Vending Machines				
	2.11	On-Site Generation				
3		Use and Costs				
_	0.					
	3.1 3.2	Electricity Natural Gas				
	3.3	Benchmarking				
		-				
		ring Your Energy Performance				
4	Energy	Conservation Measures	21			
	4.1	Lighting	24			
	ECM	1: Retrofit Fixtures with LED Lamps	24			
	4.2	Lighting Controls	24			
	ECM	2: Install Occupancy Sensor Lighting Controls	25			
		3: Install High/Low Lighting Controls				
	4.3	Variable Frequency Drives (VFD)	26			
	ECM	4: Install VFDs on Constant Volume (CV) Fans	26			
		5: Install VFDs on Heating Water Pumps				
	4.4	Electric Unitary HVAC	27			
	ECM	6: Install High-Efficiency Air Conditioning Units	27			
	4.5	Gas-Fired Heating	27			






	ECI	M 7: Install High-Efficiency Furnaces	27
	4.6	Domestic Water Heating	28
		VI 8: Install High-Efficiency Gas-Fired Water Heater	
	ECI	M 9: Install Low-Flow DHW Devices	28
	4.7	Food Service & Refrigeration Measures	29
	ECN	VI 10: Vending Machine Control	29
5	Energ	gy Efficient Best Practices	30
	Ene	ergy Tracking with ENERGY STAR® Portfolio Manager®	30
		nting Controls	
		ermostat Schedules and Temperature Resets	
		System Evaporator/Condenser Coil Cleaning	
		AC Filter Cleaning and Replacement	
		ler Maintenance	
		nace Maintenanceter Heater Maintenance	
		g Load Controls	
		nputer Monitor Replacement	
		ter Conservation	
	Pro	curement Strategies	32
6	On-si	te Generation	33
	6.1	Solar Photovoltaic	34
	6.2	Combined Heat and Power	35
7	Proje	ct Funding and Incentives	36
	7.1	SmartStart	37
	7.2	Direct Install	38
	7.3	Pay for Performance - Existing Buildings	39
	7.4	Combined Heat and Power	40
	7.5	Energy Savings Improvement Program	41
	7.6	SREC Registration Program	42
8	Energ	gy Purchasing and Procurement Strategies	43
	8.1	Retail Electric Supply Options	43
	8.2	Retail Natural Gas Supply Options	
		A: Equipment Inventory & Recommendations	
Αŗ	pendix	c B: ENERGY STAR® Statement of Energy Performance	B-1
Αr	pendix	c C: Glossary	





1 EXECUTIVE SUMMARY

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) report for Lillian M. Dunfee Elementary School. This report provides you with information about the Elementary School's energy use, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help make changes in the Elementary School. TRC conducted this study as part of a comprehensive effort to assist New Jersey school districts and local governments in controlling their energy costs and to help protect our environment by reducing statewide energy consumption.

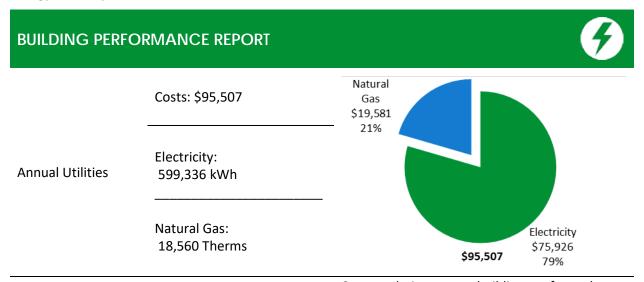

ENERGY STAR®
Benchmarking Score

57 (1-100 scale) Congratulations, your building performs better than the national average. This report has suggestions about how to keep your building running efficiently, further improve performance and lower your energy bills even more.

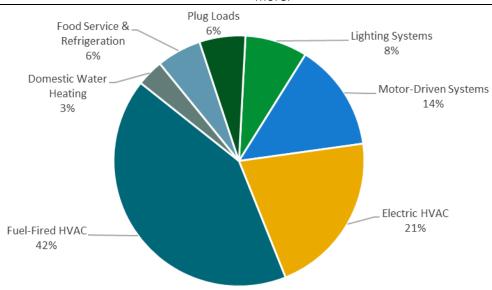


Figure 1 - Energy Use by System






POTENTIAL IMPROVEMENTS



This energy audit considered a range of potential energy improvements in your building. Costs and savings will vary between improvements. Presented below are two potential scopes of work for your consideration.


Scenario 1: Full Package (all evaluated measures)

Installation Cost		\$446,578		
Potential Rebates & Incentives ¹		\$13,664		
Annual Cost Savings		\$10,623		
Annual Energy Savings		city: 68,435 kWh as: 1,852 Therms		
Greenhouse Gas Emission	Savings	45 Tons		
Simple Payback		40.8 Years		
Site Energy Savings (all util	Site Energy Savings (all utilities)			



Scenario 2: Cost Effective Package²

Installation Cost		\$33,937
Potential Rebates & Incentiv	es	\$2,556
Annual Cost Savings		\$6,152
Annual Energy Savings		ty: 46,381 kWh as: 262 Therms
Greenhouse Gas Emission Sa	vings	25 Tons
Simple Payback		5.1 Years
Site Energy Savings (all utiliti	es)	5%



On-site Generation Potential

Photovoltaic	High
Combined Heat and Power	None

¹ Incentives are based on current SmartStart Prescriptive incentives. Other program incentives may apply.

² A cost-effective measure is defined as one where the simple payback does not exceed two-thirds of the expected proposed equipment useful life. Simple payback is based on the net measure cost after potential incentives.





#	Energy Conservation Measure	Cost effective?	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)		Estimated Net Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades		9,100	1.5	-1	\$1,142	\$3,485	\$486	\$2,999	2.6	9,043
ECM 1	Retrofit Fixtures with LED Lamps	Yes	9,100	1.5	-1	\$1,142	\$3,485	\$486	\$2,999	2.6	9,043
Lighting	Control Measures		19,397	3.9	-4	\$2,415	\$16,910	\$1,420	\$15,490	6.4	19,058
ECM 2	Install Occupancy Sensor Lighting Controls	Yes	16,213	3.3	-3	\$2,018	\$13,310	\$1,420	\$11,890	5.9	15,930
ECM 3	Install High/Low Lighting Controls	Yes	3,184	0.6	-1	\$396	\$3,600	\$0	\$3,600	9.1	3,129
Variable	Frequency Drive (VFD) Measures		16,272	3.1	О	\$2,061	\$13,154	\$600	\$12,554	6.1	16,386
ECM 4	Install VFDs on Constant Volume (CV) Fans	Yes	7,759	2.1	0	\$983	\$4,761	\$600	\$4,161	4.2	7,813
ECM 5	Install VFDs on Heating Water Pumps	Yes	8,513	1.0	0	\$1,079	\$8,394	\$0	\$8,394	7.8	8,573
Electric	Unitary HVAC Measures		22,054	15.1	0	\$2,794	\$350,615	\$7,608	\$343,007	122.8	22,208
ECM 6	Install High Efficiency Air Conditioning Units	No	22,054	15.1	0	\$2,794	\$350,615	\$7,608	\$343,007	122.8	22,208
Gas Hea	ting (HVAC/Process) Replacement		0	0.0	146	\$1,539	\$53,358	\$3,200	\$50,158	32.6	17,082
ECM 7	Install High Efficiency Furnaces	No	0	0.0	146	\$1,539	\$53,358	\$3,200	\$50,158	32.6	17,082
Domest	ic Water Heating Upgrade		0	0.0	44	\$468	\$8,826	\$300	\$8,526	18.2	5,197
ECM 8	Install High Efficiency Gas-Fired Water Heater	No	0	0.0	13	\$138	\$8,669	\$300	\$8,369	60.7	1,530
ECM 9	Install Low-Flow DHW Devices	Yes	0	0.0	31	\$330	\$158	\$0	\$158	0.5	3,667
Food Se	rvice & Refrigeration Measures		1,612	0.2	0	\$204	\$230	\$50	\$180	0.9	1,623
ECM 10	Vending Machine Control	Yes	1,612	0.2	0	\$204	\$230	\$50	\$180	0.9	1,623
	TOTALS (COST EFFECTIVE MEASURES)		46,381	8.7	26	\$6,152	\$33,937	\$2,556	\$31,381	5.1	49,777
	TOTALS (ALL MEASURES)		68,435	23.8	185	\$10,623	\$446,578	\$13,664	\$432,914	40.8	90,597

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

Figure 2 – Evaluated Energy Improvements

For more detail on each evaluated energy improvement and a break out of cost-effective improvements, see **Section 4: Energy Conservation Measures**.

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





1.1 Planning Your Project

Careful planning makes for a successful energy project. When considering this scope of work, you will have some decisions to make, such as:

- ♦ How will the project be funded and/or financed?
- Is it best to pursue individual ECMs, groups of ECMs, or use a comprehensive approach where all ECMs are installed together?
- Are there other facility improvements that should happen at the same time?

Pick Your Installation Approach

New Jersey's Clean Energy Programs give you the flexibility to do a little or a lot. Rebates, incentives, and financing are available to help reduce both your installation costs and your energy bills. If you are planning to take advantage of these programs, make sure to review incentive program guidelines before proceeding. This is important because in most cases you will need to submit applications for the incentives before purchasing materials or starting installation.

The potential ECMs identified for this building likely qualify for multiple incentive and funding programs. Based on current program rules and requirements, your measures are likely to qualify for the following programs:

	Energy Conservation Measure	SmartStart	Direct Install	Pay For Performance
ECM 1	Retrofit Fixtures with LED Lamps	X	Х	
ECM 2	Install Occupancy Sensor Lighting Controls	Х	Х	
ECM 3	Install High/Low Lighting Controls	Х	Х	
ECM 4	Install VFDs on Constant Volume (CV) HVAC	Х	Х	
ECM 5	Install VFDs on Hot Water Pumps		Х	
ECM 6	Install High Efficiency Electric AC	Х	Х	
ECM 7	Install High Efficiency Furnaces	X		
ECM 8	Install High Efficiency Gas Water Heater	X	Х	
ECM 9	Install Low-Flow Domestic Hot Water Devices		Х	
ECM 10	Vending Machine Control		Х	

Figure 3 – Funding Options







New Jersey's Clean Energy Programs At-A-Glance

	SmartStart Flexibility to install at your own pace	Direct Install Turnkey installation	Pay for Performance Whole building upgrades
Who should use it?	Buildings installing individual measures or small group of measures.	Small to mid-size facilities that can bundle multiple measures together. Average peak demand should be below 200 kW. Not suitable for significant building shell issues.	Mid to large size facilities looking to implement as many measures as possible at one time. Peak demand should be over 200 kW.
How does it work?	Use in-house staff or your preferred contractor.	Pre-approved contractors pass savings along to you via reduced material and labor costs.	Whole-building approach to energy upgrades designed to reduce energy use by at least 15%. The more you save, the higher the incentives.
What are the Incentives?	Fixed incentives for specific energy efficiency measures.	Incentives pay up to 70% of eligible costs, up to \$125,000 per project. You pay the remaining 30% directly to the contractor.	Up to 25% of installation cost, calculated based on level of energy savings per square foot.
How do I participate?	How do I participate? Submit an application for the specific equipment to be installed.		Contact a pre-qualified Partner to develop your Energy Reduction Plan and set your energy savings targets.

Take the next step by visiting **www.njcleanenergy.com** for program details, applications, and to contact a qualified contractor.





Individual Measures with SmartStart

For facilities wishing to pursue only selected individual measures (or planning to phase implementation of selected measures over multiple years), incentives are available through the SmartStart program. To participate, you can use internal resources or an outside firm or contractor to perform the final design of the ECM(s) and install the equipment. Program pre-approval is required for some SmartStart incentives, so only after receiving pre-approval should you proceed with ECM installation.

Turnkey Installation with Direct Install

The Direct Install program provides turnkey installation of multiple measures through an authorized network of participating contractors. This program can provide substantially higher incentives than SmartStart, up to 70% of the cost of selected measures. Direct Install contractors will assess and verify individual measure eligibility and, in most cases, they perform the installation work. The Direct Install program is available to sites with an average peak demand of less than 200 kW.

Whole Building Approach with Pay for Performance

Pay for Performance can be a good option for medium to large sized facilities to achieve deep energy savings. Pay for Performance allows you to install as many measures as possible under a single project as well as address measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program (ESIP) loan also use this program. Pay for Performance works for larger customers with a peak demand over 200 kW. The minimum installed scope of work must include at least two unique measures resulting in at least 15% energy savings, where lighting cannot make up the majority of the savings.

More Options from Around the State

Financing and Planning Support with the Energy Savings Improvement Program (ESIP)

For larger facilities with limited capital availability to implement ECMs, project financing may be available through the ESIP. Supported directly by the NJBPU, ESIP provides government agencies with project development, design, and implementation support services, as well as, attractive financing for implementing ECMs. You have already taken the first step as an LGEA customer, because this report is required to participate in ESIP.

Resiliency with Return on Investment through Combined Heat & Power (CHP)

The CHP program provides incentives for combined heat and power (aka cogeneration) and waste heat to power projects. Combined heat and power systems generate power on-site and recover heat from the generation system to meet on-site thermal loads. Waste heat to power systems use waste heat to generate power. You will work with a qualified developer who will design a system that meets your building's heating and cooling needs.

Ongoing Electric Savings with Demand Response

The Demand Response Energy Aggregator program reduces electric loads at commercial facilities when wholesale electricity prices are high or when the reliability of the electric grid is threatened due to peak power demand. By enabling commercial facilities to reduce electric demand during times of peak demand, the grid is made more reliable and overall transmission costs are reduced for all ratepayers. Curtailment service providers provide regular payments to medium and large consumers of electric power for their participation in demand response (DR) programs. Program participation is voluntary, and facilities receive payments regardless of whether they are called upon to curtail their load during times of peak demand.





2 EXISTING CONDITIONS

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) Report for Lillian M. Dunfee Elementary School. This report provides information on how the Elementary School uses energy, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help you implement the ECMs. This report also contains valuable information on financial incentives from New Jersey's Clean Energy Program (NJCEP) for implementing ECMs.

TRC conducted this study as part of a comprehensive effort to assist New Jersey educational and local government facilities in controlling energy costs and protecting our environment by offering a wide range of energy management options and advice.

For a detailed list of the locations and recommended energy conservation measures for all inventoried equipment, see **Appendix A: Equipment Inventory & Recommendations.**

2.1 Site Overview

On July 10, 2019, TRC performed an energy audit at Lillian M. Dunfee Elementary School located in Barnegat, New Jersey. TRC met with Neil Piro to review the facility operations and help focus our investigation on specific energy-using systems.

Lillian M. Dunfee Elementary School is a one-story, 70,817 square foot building built in 1974. Spaces include: classrooms, a gymnasium, a cafeteria, corridors, offices, a kitchen, and a mechanical space.

In 2013, the Elementary School replaced all its existing fluorescent fixtures with LED linear tubes fixtures through the Direct Install program. The facility is 100% heated and cooled, and has onsite generation.

2.2 Building Occupancy

The Elementary School is occupied from September through June. Typical weekday occupancy is 80 staff and 947 students.

Building Name	Weekday/Weekend	Operating Schedule
	Weekday	6:00 AM - 6:30 PM
Lillian M. Dunfee Elementary School	Weekend	Saturday: 8:00 AM - 12:30 PM (Occasional) Sunday: No Operation

Figure 4 - Building Occupancy Schedule





2.3 Building Envelope

Building walls are concrete block over structural steel with a brick facade. The dividing walls are constructed from concrete masonry units. The roof is built-up, flat, and covered with stone ballast. It is in good condition.

All windows are double-glazed with aluminum frames and a thermal break. The glass-to-frame seals are in good condition. Exterior doors have aluminum frames and are in good condition with undamaged door seals.



Brick facade



Built up stone ballast roof





2.4 Lighting Systems

The primary interior lighting system uses 15-Watt LED linear tubes and 26-watt 4-pin compact fluorescent lamps. Fixture types include 2- or 3- lamp, 4-foot long troffers, and surface-mounted fixtures.

Most fixtures are in good condition. The gymnasium has T5 high-output high bay fixtures that are manually controlled. Most of the interior fixtures in the school are controlled by wall switches. The newer section classrooms and offices are controlled using occupancy sensors. All exit signs are LED units. Interior lighting levels were generally sufficient.

Exterior lighting is provided by wall-mounted and recessed fixtures with 26-watt 4-pin compact fluorescent lamps that are timeclock controlled.



Wall-mounted CFL



LED Linear Tubes



LED Exit Light



Dome Fixture in the Entrance





2.5 Air Handling Systems

Unit Ventilators

There are approximately eight pneumatically controlled unit ventilators with supply fan motors and outside air dampers. Hot water is circulated here from the boiler, and they distribute heat to the respective zones. This system is original to the building and appears to be in fair operating condition.

Packaged Units

The building has seven packaged units manufactured by AAON and Seasons 4. These units serve the gym, hallways, library, and computer lab. They have cooling capacities ranging from 13 to 30-ton and gas-fired furnaces with heating capacities ranging from 146 to 500 MBh. The average EER of these units is 9. Most of the units were installed between the years 2003 to 2008. These are past their useful life and have been evaluated for replacement.

The cafeteria is cooled using four York packaged units, each with a 7-ton cooling capacity. These units have an EER of 11.2 and were installed in 2019. These units are in good condition.

The space temperatures are controlled using an EMS. The cooling setpoints in the facility is between 68°F to 71°F.

Air Conditioners

The electrical room, server room and smaller office spaces are cooled using Mitsubishi and Intercity Products split AC units with cooling capacities between 1 to 3-tons and an average EER of 10.8. Most of these units are past their useful life and have been evaluated for replacement.

The space temperatures are controlled using programmable thermostats in the respective zones.



AAON Packaged Units



Split AC Unit



Cafeteria Packaged Units



Programmable Thermostat for Split Units





2.6 Heating Hot Water Systems

Two LAARS condensing gas-fired hot water boilers serve a portion of the building heating load. The burners are fully-modulating with a nominal efficiency of 85%. The boilers are configured in a lead-lag control scheme. Installed in 2008, they are in good condition.

The boilers are configured in a constant flow primary distribution with two 5 hp constant speed hot water pumps. The boilers provide hot water to unit ventilators in classrooms throughout the building.

The classrooms also have 1 kW electric resistance heaters as backup in case convectors face any issue to provide heat. Heating set points in the buildings are between 71°F to 74°F. Gas-fired furnaces provide heat in areas conditioned by package units.



Condensing Hot Water Boiler



Electric Heater



Heating Hot Water Pumps



Unit Ventilators

2.7 Building Energy Management Systems (EMS)

A Carrier Automated Building EMS controls the HVAC equipment, boilers, air handlers, and package units. The EMS provides equipment scheduling control and monitors and controls space temperatures, supply air temperatures and heating water loop temperatures.





2.8 Domestic Hot Water

Hot water is produced using two water heaters. Both units are gas-fired with input capacities of 150 MBh. The AO Smith heater is 75% efficient with a tank capacity of 100 gallons (AO Smith) while the Laars unit, with a tank capacity of 60 gallons, is 80% efficient. The water heaters were installed in the years 2008 and 2016, respectively. The older unit (AO Smith) has been evaluated for replacement.

The hot water is distributed to end uses using fractional horse power circulation pump.



AO Smith Water Heater



Laars Water Heater





2.9 Food Service Refrigeration Equipment

The kitchen has a mix of gas and electric equipment that is used to prepare lunches for students. Most cooking/reheating is done using a convection gas-fired oven. Bulk prepared foods are held in several electric holding cabinets. Equipment are high-efficiency and in good condition.

The kitchen has a stand-up refrigerator with solid doors and several refrigerated chests. All equipment is standard efficiency and in good condition.

The walk-in refrigerator has an estimated 0.67-ton compressor and a two-fan evaporator. The walk-in medium temperature freezer has an approximately 1.67-ton compressor and a three-fan evaporator with defrost controls.

Visit https://www.energystar.gov/products/commercial food service equipment for the latest information on high-efficiency food service equipment.



Convection Oven



Freezer Chest



Warmers



Reach-in Refrigerator





2.10 Plug Load & Vending Machines

The utility bill analysis indicates that plug loads consume approximately 6% percent of total building energy use. This is higher than a typical building. You may wish to consider paying particular attention to minimizing your plug load usage. This report makes suggestions for ECMs in this area, as well as Energy Efficient Best Practices.

There are approximately 133 computer work stations throughout the Elementary School. Plug loads throughout the building include general café and office equipment. There are classroom typical loads such as Smart Boards, projectors, and fans. There are several residential-style refrigerators throughout the building that are used to store food. These vary in condition and efficiency. There is one refrigerated beverage vending machine and one non-refrigerated vending machine not equipped with occupancy-based controls.

2.11 Water-Using Systems

There are 22 faucets with flow rates at 2.2 gallons per minute (gpm). Toilets are rated at 1.6 gallons per flush (gpf) and urinals are rated at 1.0 gpf

2.12 On-Site Generation

Lillian M. Dunfee Elementary School has a photovoltaic (PV) array of approximately 215 kW with 770 panels, installed in 2011. The system provides approximately 65% of the electricity used at the Elementary School.



Solar Array



Solar Array (closeup)






3 ENERGY USE AND COSTS

Twelve months of utility billing data are used to develop annual energy consumption and cost data. This information creates a profile of the annual energy consumption and energy costs.

Uti	Utility Summary								
Fuel	Usage	Cost							
Electricity	599,336 kWh	\$75,926							
Natural Gas	18,560 Therms	\$19,581							
Total		\$95,507							



An energy balance identifies and quantifies energy use in your various building systems. This can highlight areas with the most potential for improvement. This energy balance was developed using calculated energy use for each of the end uses noted in the figure.

The energy auditor collects information regarding equipment operating hours, capacity, efficiency, and other operational parameters from facility staff, drawings, and on-site observations. This information is used as the inputs to calculate the existing conditions energy use for the site. The calculated energy use is then compared to the historical energy use and the initial inputs are revised, as necessary, to balance the calculated energy use to the historical energy use.





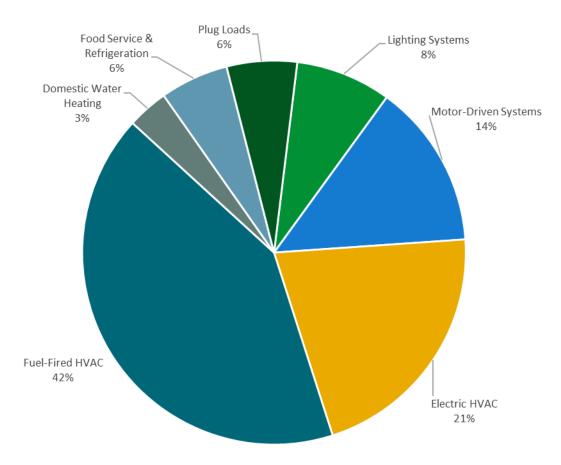



Figure 5 - Energy Balance





3.1 Electricity

JCP&L delivers electricity under rate class GSS, with electric production provided by South Jersey Energy/Trieagle Energy, a third-party supplier.

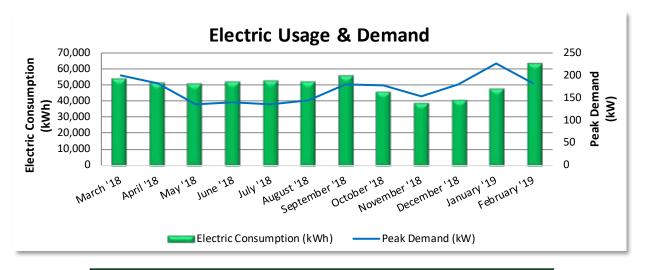

	Electric Billing Data									
Period Ending	Days in Period	Electric Usage (kWh)	Demand (kW)	Demand Cost	Total Electric Cost					
3/27/18	30	53,752	199	\$1,250	\$6,589					
4/24/18	28	51,275	183	\$1,092	\$6,656					
5/25/18	31	50,209	136	\$791	\$6,158					
6/26/18	32	51,592	139	\$870	\$6,478					
7/26/18	30	52,333	136	\$851	\$6,569					
8/27/18	32	51,957	144	\$902	\$6,526					
9/26/18	30	55,135	179	\$1,139	\$6,738					
10/25/18	29	45,615	177	\$1,048	\$6,154					
11/27/18	33	38,473	153	\$897	\$5,149					
12/27/18	30	40,280	180	\$1,068	\$5,712					
1/25/19	29	47,579	227	\$1,359	\$6,035					
2/26/19	32	62,778	182	\$1,080	\$7,369					
Totals	366	600,978	227	\$12,346	\$76,134					
Annual	365	599,336	227	\$12,313	\$75,926					

Notes:


- Peak demand of 227 kW occurred in January '19.
- The average electric cost over the past 12 months was \$0.127/kWh, which is the blended rate that includes energy supply, distribution, demand, and other charges. This report uses this blended rate to estimate energy cost savings.





3.2 Natural Gas

New Jersey Natural Gas delivers natural gas under rate class GSL, with natural gas supply provided by South Jersey Energy, a third-party supplier.

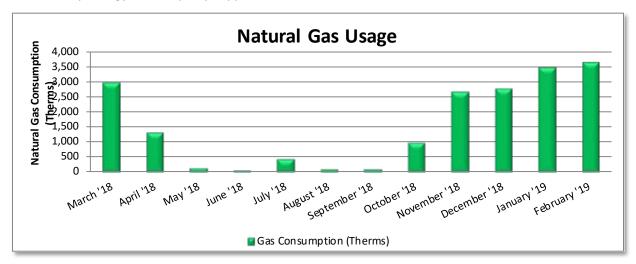

Gas Billing Data									
Period Ending	Days in Period	Natural Gas Usage (Therms)	Natural Gas Cost						
4/4/18	30	2,945	\$2,610						
5/2/18	28	1,327	\$1,305						
6/4/18	33	141	\$532						
7/3/18	29	74	\$329						
8/3/18	31	457	\$629						
8/29/18	26	104	\$353						
10/1/18	33	128	\$374						
11/1/18	31	995	\$1,038						
12/5/18	34	2,644	\$2,304						
1/3/19	29	2,744	\$3,183						
2/2/19	30	3,435	\$3,520						
3/6/19	32	3,616	\$3,457						
Totals	366	18,610	\$19,635						
Annual	365	18,560	\$19,581						

Notes:

• The average gas cost for the past 12 months is \$1.055/therm, which is the blended rate used throughout the analysis.





3.3 Benchmarking

Your building was benchmarked using the United States Environmental Protection Agency's (EPA) *Portfolio Manager®* software. Benchmarking compares your building's energy use to that of similar buildings across the country, while neutralizing variations due to location, occupancy and operating hours. Some building types can be scored with a 1-100 ranking of a building's energy performance relative to the national building market. A score of 50 represents the national average and a score of 100 is best.

This ENERGY STAR® benchmarking score provides a comprehensive snapshot of your building's energy performance. It assesses the building's physical assets, operations, and occupant behavior, which is compiled into a quick and easy-to-understand score.

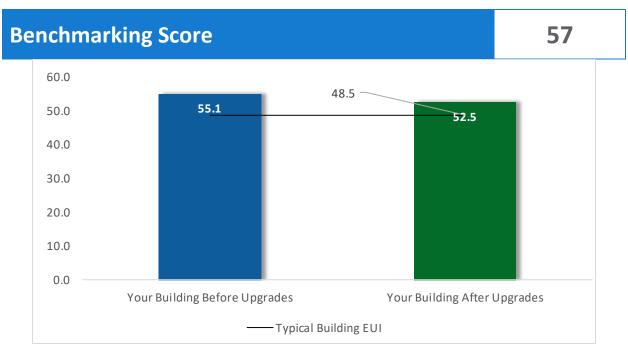


Figure 6 - Energy Use Intensity Comparison

Congratulations, your building performs better than the national average. This report has suggestions about how to keep your building running efficiently, further improve performance, and lower your energy bills even more.

Energy use intensity (EUI) measures energy consumption per square foot and is the standard metric for comparing buildings' energy performance. A lower EUI means better performance and less energy consumed. A number of factors can cause as building to vary from the "typical" energy usage. Local weather conditions, building age and insulation levels, equipment efficiency, daily occupancy hours, changes in occupancy throughout the year, equipment operating hours, and occupant behavior all contribute to a building's energy use and the benchmarking score.





Tracking Your Energy Performance

Keeping track of your energy use on a monthly basis is one of the best ways to keep energy costs in check. Update your utility information in Portfolio Manager® regularly, so that you can keep track of your building's performance.

We have created a Portfolio Manager® account for your facility and we have already entered the monthly utility data shown above for you. Account login information for your account will be sent via email.

Free online training is available to help you use ENERGY STAR® Portfolio Manager® to track your building's performance at: https://www.energystar.gov/buildings/training.

For more information on ENERGY STAR® and Portfolio Manager®, visit their website³.

LGEA Report - Barnegat Township School District Lillian M. Dunfee Elementary School

³ https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/earn-recognition/energy-star-certification/how-app-1.





4 ENERGY CONSERVATION MEASURES

The goal of this audit report is to identify and evaluate potential energy efficiency improvements, provide information about the cost effectiveness of those improvements, and recognize potential financial incentives from NJBPU. Most energy conservation measures have received preliminary analysis of feasibility which identifies expected ranges of savings and costs. This level of analysis is typically sufficient to demonstrate project cost-effectiveness and help prioritize energy measures.

Calculations of energy use and savings are based on the current version of the *New Jersey's Clean Energy Program Protocols to Measure Resource Savings*, which is approved by the NJBPU. Further analysis or investigation may be required to calculate more precise savings based on specific circumstances.

Operation and maintenance costs for the proposed new equipment will generally be lower than the current costs for the existing equipment—especially if the existing equipment is at or past its normal useful life. We have conservatively assumed there to be no impact on overall maintenance costs over the life of the equipment.

Financial incentives are based on the current NJCEP prescriptive SmartStart program. A higher level of investigation may be necessary to support any SmartStart Custom, Pay for Performance, or Direct Install incentive applications. Some measures and proposed upgrades may be eligible for higher incentives than those shown below through other NJCEP programs described in a following section of this report.





#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades	9,100	1.5	-1	\$1,142	\$3,485	\$486	\$2,999	2.6	9,043
ECM 1	Retrofit Fixtures with LED Lamps	9,100	1.5	-1	\$1,142	\$3,485	\$486	\$2,999	2.6	9,043
Lighting	Control Measures	19,397	3.9	-4	\$2,415	\$16,910	\$1,420	\$15,490	6.4	19,058
ECM 2	Install Occupancy Sensor Lighting Controls	16,213	3.3	-3	\$2,018	\$13,310	\$1,420	\$11,890	5.9	15,930
ECM 3	Install High/Low Lighting Controls	3,184	0.6	-1	\$396	\$3,600	\$0	\$3,600	9.1	3,129
Variable	Frequency Drive (VFD) Measures	16,272	3.1	0	\$2,061	\$13,154	\$600	\$12,554	6.1	16,386
ECM 4	Install VFDs on Constant Volume (CV) Fans	7,759	2.1	0	\$983	\$4,761	\$600	\$4,161	4.2	7,813
ECM 5	Install VFDs on Heating Water Pumps	8,513	1.0	0	\$1,079	\$8,394	\$0	\$8,394	7.8	8,573
Electric	Unitary HVAC Measures	22,054	15.1	0	\$2,794	\$350,615	\$7,608	\$343,007	122.8	22,208
ECM 6	Install High Efficiency Air Conditioning Units	22,054	15.1	0	\$2,794	\$350,615	\$7,608	\$343,007	122.8	22,208
Gas Hea	ting (HVAC/Process) Replacement	0	0.0	146	\$1,539	\$53,358	\$3,200	\$50,158	32.6	17,082
ECM 7	Install High Efficiency Furnaces	0	0.0	146	\$1,539	\$53,358	\$3,200	\$50,158	32.6	17,082
Domest	ic Water Heating Upgrade	0	0.0	44	\$468	\$8,826	\$300	\$8,526	18.2	5,197
ECM 8	Install High Efficiency Gas-Fired Water Heater	0	0.0	13	\$138	\$8,669	\$300	\$8,369	60.7	1,530
ECM 9	Install Low-Flow DHW Devices	0	0.0	31	\$330	\$158	\$0	\$158	0.5	3,667
Food Se	rvice & Refrigeration Measures	1,612	0.2	0	\$204	\$230	\$50	\$180	0.9	1,623
ECM 10	Vending Machine Control	1,612	0.2	0	\$204	\$230	\$50	\$180	0.9	1,623
	TOTALS	68,435	23.8	185	\$10,623	\$446,578	\$13,664	\$432,914	40.8	90,597

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance

Figure 7 – All Evaluated ECMs

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades	9,100	1.5	-1	\$1,142	\$3,485	\$486	\$2,999	2.6	9,043
ECM 1	Retrofit Fixtures with LED Lamps	9,100	1.5	-1	\$1,142	\$3,485	\$486	\$2,999	2.6	9,043
Lighting	Control Measures	19,397	3.9	-4	\$2,415	\$16,910	\$1,420	\$15,490	6.4	19,058
ECM 2	Install Occupancy Sensor Lighting Controls	16,213	3.3	-3	\$2,018	\$13,310	\$1,420	\$11,890	5.9	15,930
ECM 3	Install High/Low Lighting Controls	3,184	0.6	-1	\$396	\$3,600	\$0	\$3,600	9.1	3,129
Variable	Frequency Drive (VFD) Measures	16,272	3.1	0	\$2,061	\$13,154	\$600	\$12,554	6.1	16,386
ECM 4	Install VFDs on Constant Volume (CV) Fans	7,759	2.1	0	\$983	\$4,761	\$600	\$4,161	4.2	7,813
ECM 5	Install VFDs on Heating Water Pumps	8,513	1.0	0	\$1,079	\$8,394	\$0	\$8,394	7.8	8,573
Domesti	c Water Heating Upgrade	0	0.0	31	\$330	\$158	\$0	\$158	0.5	3,667
ECM 9	Install Low-Flow DHW Devices	0	0.0	31	\$330	\$158	\$0	\$158	0.5	3,667
Food Sei	vice & Refrigeration Measures	1,612	0.2	0	\$204	\$230	\$50	\$180	0.9	1,623
ECM 10	Vending Machine Control	1,612	0.2	0	\$204	\$230	\$50	\$180	0.9	1,623
	TOTALS	46,381	8.7	26	\$6,152	\$33,937	\$2,556	\$31,381	5.1	49,777

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance

Figure 8 – Cost Effective ECMs

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





4.1 Lighting

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)				CO ₂ e Emissions Reduction (lbs)
Lighting Upgrades		9,100	1.5	-1	\$1,142	\$3,485	\$486	\$2,999	2.6	9,043
ECM 1	Retrofit Fixtures with LED Lamps	9,100	1.5	-1	\$1,142	\$3,485	\$486	\$2,999	2.6	9,043

When considering lighting upgrades, we suggest using a comprehensive design approach that simultaneously upgrades lighting fixtures and controls to maximize energy savings and improve occupant lighting. Comprehensive design will also consider appropriate lighting levels for different space types to make sure that the right amount of light is delivered where needed. If conversion to LED light sources is proposed, we suggest converting all fixtures of a specific lighting type (e.g. linear fluorescent) to LED lamps to minimize the number of lamp types in use at the Elementary School, which should help reduce future maintenance costs.

ECM 1: Retrofit Fixtures with LED Lamps

Replace fluorescent or CFL lamps with LED lamps. Many LED tubes are direct replacements for existing fluorescent tubes and can be installed while leaving the fluorescent fixture ballast in place. LED lamps can be used in existing fixtures as direct replacements for most other lighting technologies.

This measure saves energy by installing LEDs, which use less power than other lighting technologies while providing equivalent lighting output for the space. Maintenance savings may also be available, as longer-lasting LEDs lamps will not need to be replaced as often as the existing lamps.

Affected building areas: gym with T5 fixtures and smaller spaces with CFL.

4.2 Lighting Controls

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)	1	CO₂e Emissions Reduction (Ibs)
Lighting	Control Measures	19,397	3.9	-4	\$2,415	\$16,910	\$1,420	\$15,490	6.4	19,058
1 F (M/)	Install Occupancy Sensor Lighting Controls	16,213	3.3	-3	\$2,018	\$13,310	\$1,420	\$11,890	5.9	15,930
ECM 3	Install High/Low Lighting Controls	3,184	0.6	-1	\$396	\$3,600	\$0	\$3,600	9.1	3,129

Lighting controls reduce energy use by turning off or lowering lighting fixture power levels when not in use. A comprehensive approach to lighting design should upgrade the lighting fixtures and the controls together for maximum energy savings and improved lighting for occupants.





ECM 2: Install Occupancy Sensor Lighting Controls

Install occupancy sensors to control lighting fixtures in areas that are frequently unoccupied, even for short periods. For most spaces, we recommend that lighting controls use dual technology sensors, which reduce the possibility of lights turning off unexpectedly.

Occupancy sensors detect occupancy using ultrasonic and/or infrared sensors. When an occupant enters the space, the lighting fixtures switch to full lighting levels. Most occupancy sensor lighting controls allow users to manually turn fixtures on/off, as needed. Some controls can also provide dimming options.

Occupancy sensors can be mounted on the wall at existing switch locations, on the ceiling, or in remote locations. In general, wall switch replacement sensors are best suited to single occupant offices and other small rooms. Ceiling-mounted or remote-mounted sensors are used in large spaces, locations without local switching, and where wall switches are not in the line-of-sight of the main work area.

This measure provides energy savings by reducing the lighting operating hours.

Affected building areas: offices, conference rooms, classrooms, gymnasium, library, restrooms, and storage rooms.

ECM 3: Install High/Low Lighting Controls

Install occupancy sensors to provide dual level lighting control for lighting fixtures in spaces that are infrequently occupied but may require some level of continuous lighting for safety or security reasons.

Lighting fixtures with these controls operate at default low levels when the area is unoccupied to provide minimal lighting to meet security or safety requirements. Sensors detect occupancy using ultrasonic and/or infrared sensors. When an occupant enters the space, the lighting fixtures switch to full lighting levels. Fixtures automatically switch back to low levels after a predefined period of vacancy. In parking lots and parking garages with significant ambient lighting, this control can sometimes be combined with photocell controls to turn the lights off when there is sufficient daylight.

The control lowers the light level by dimming the fixture output. Therefore, the controlled fixtures need to have a dimmable ballast or driver. This will need to be taken into account when selecting retrofit lamps and bulbs for the areas proposed for high/low control.

This measure provides energy savings by reducing the light fixture power draw when reduced light output is appropriate.

Affected building areas: hallways





4.3 Variable Frequency Drives (VFD)

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)		Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Variable	e Frequency Drive (VFD) Measures	16,272	3.1	0	\$2,061	\$13,154	\$600	\$12,554	6.1	16,386
ECM 4	Install VFDs on Constant Volume (CV) Fans	7,759	2.1	0	\$983	\$4,761	\$600	\$4,161	4.2	7,813
I ECM 5	Install VFDs on Heating Water Pumps	8,513	1.0	0	\$1,079	\$8,394	\$0	\$8,394	7.8	8,573

Variable frequency drives (VFDs) control motors for fans, pumps, and process equipment based on the actual output required of the driven equipment. Energy savings result from more efficient control of motor energy usage when equipment operates at partial load. The magnitude of energy savings depends on the estimated amount of time that the motor would operate at partial load. For equipment with proposed VFDs, we have included replacing the controlled motor with a new motor to conservatively account for the cost of an inverter duty rated motor.

ECM 4: Install VFDs on Constant Volume (CV) Fans

Install VFDs to control constant volume fan motor speeds. This converts a constant-volume, single-zone air handling system into a variable-air-volume (VAV) system. A separate VFD is usually required to control the return fan motor or dedicated exhaust fan motor, if the air handler has one.

Zone thermostats signal the VFD to adjust fan speed to maintain the appropriate temperature in the zone while maintaining a constant supply air temperature.

For air handlers with direct expansion (DX) cooling systems, the minimum air flow across the cooling coil required to prevent the coil from freezing must be determined during the final project design. The control system programming should maintain the minimum air flow whenever the compressor is operating. Prior to implementation, verify minimum fan speed in cooling mode with the manufacturer. Note that savings will vary depending on the operating characteristics of each AHU.

Energy savings result from reducing the fan speed (and power) when conditions allow for reduced air flow.

Affected air handlers: AHU.

ECM 5: Install VFDs on Heating Water Pumps

Install VFDs to control heating water pumps. Two-way valves must serve the hot water coils, and the hot water loop must have a differential pressure sensor installed. If three-way valves or a bypass leg are used in the hot water distribution, they will need to be modified when this measure is implemented. As the hot water valves close, the differential pressure increases, and the VFD modulates the pump speed to maintain a differential pressure setpoint.

Energy savings result from reducing pump motor speed (and power) as hot water valves close. The magnitude of energy savings is based on the estimated amount of time that the system will operate at reduced load.

Affected pumps: HWP 1, HWP 2.





4.4 Electric Unitary HVAC

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)				CO ₂ e Emissions Reduction (lbs)
Electric	Unitary HVAC Measures	22,054	15.1	0	\$2,794	\$350,615	\$7,608	\$343,007	122.8	22,208
ECM 6	Install High Efficiency Air Conditioning Units	22,054	15.1	0	\$2,794	\$350,615	\$7,608	\$343,007	122.8	22,208

Replacing the unitary HVAC units has a long payback period and may not be justifiable based simply on energy considerations. However, most of the units at the Elementary School are nearing or have reached the end of their normal useful life. Typically, the marginal cost of purchasing a high-efficiency unit can be justified by the marginal savings from the improved efficiency. When the packaged and the split AC units is eventually replaced, consider purchasing equipment that exceeds the minimum efficiency required by building codes.

ECM 6: Install High-Efficiency Air Conditioning Units

Replace standard efficiency packaged air conditioning units with high-efficiency packaged air conditioning units. The magnitude of energy savings for this measure depends on the relative efficiency of the older unit versus the new high-efficiency unit, average cooling load, and estimated annual operating hours.

Affected cooling units: part of RTU replacement for RTU 1, 2, 3, 4, 5, 6, 8, 9; older split system units.

4.5 Gas-Fired Heating

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)				CO ₂ e Emissions Reduction (lbs)
Gas He	ating (HVAC/Process) Replacement	0	0.0	146	\$1,539	\$53,358	\$3,200	\$50,158	32.6	17,082
ECM 7	Install High Efficiency Furnaces	0	0.0	146	\$1,539	\$53,358	\$3,200	\$50,158	32.6	17,082

ECM 7: Install High-Efficiency Furnaces

Replace standard efficiency furnaces with condensing furnaces. Improved combustion technology and heat exchanger design optimize heat recovery from the combustion gases, which can significantly improve furnace efficiency. Savings result from improved system efficiency.

Note: these units produce acidic condensate that requires proper drainage.

Furnace replacement for these RTU should be considered in parallel with ECM 6 for replacement of the entire package unit.

Affected furnaces: part of RTU replacement for RTU 1, 2, 3, 4, 5, 6, 8, 9.





4.6 Domestic Water Heating

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)				CO ₂ e Emissions Reduction (lbs)
Domes	tic Water Heating Upgrade	0	0.0	44	\$468	\$8,826	\$300	\$8,526	18.2	5,197
ECM 8	Install High Efficiency Gas-Fired Water Heater	0	0.0	13	\$138	\$8,669	\$300	\$8,369	60.7	1,530
ECM 9	Install Low-Flow DHW Devices	0	0.0	31	\$330	\$158	\$0	\$158	0.5	3,667

ECM 8: Install High-Efficiency Gas-Fired Water Heater

Replace the existing tank water heater with a high-efficiency tank water heater. Energy savings result from the increased efficiency of the unit, which uses less gas to heat water, and fewer operating hours to maintain the tank water temperature.

ECM 9: Install Low-Flow DHW Devices

Install low-flow devices to reduce overall hot water demand. The following low-flow devices are recommended to reduce hot water usage:

Device	Flow Rate
Faucet aerators (lavatory)	0.5 gpm
Faucet aerator (kitchen)	1.5 gpm
Showerhead	2.0 gpm
Pre-rinse spray valve (kitchen)	1.28 gpm

Low-flow devices reduce the overall water flow from the fixture while still providing adequate pressure for washing. Pre-rinse spray valves (PRSVs)—often used in commercial and institutional kitchens—remove food waste from dishes prior to dishwashing.

Additional cost savings may result from reduced water usage.





4.7 Food Service & Refrigeration Measures

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)				CO ₂ e Emissions Reduction (lbs)
Food Se	ervice & Refrigeration Measures	1,612	0.2	0	\$204	\$230	\$50	\$180	0.9	1,623
ECM 10	Vending Machine Control	1,612	0.2	0	\$204	\$230	\$50	\$180	0.9	1,623

ECM 10: Vending Machine Control

Vending machines operate continuously, even during unoccupied hours. Install occupancy sensor controls to reduce energy use. These controls power down vending machines when the vending machine area has been vacant for some time, and power up the machines at necessary regular intervals or when the surrounding area is occupied. Energy savings are dependent on the vending machine and activity level in the area surrounding the machines.





5 ENERGY EFFICIENT BEST PRACTICES

A whole building maintenance plan will extend equipment life; improve occupant comfort, health, and safety; and reduce energy and maintenance costs. You may already be doing some of these things— see our list below for potential additions to your maintenance plan. Be sure to consult with qualified equipment specialists for details on proper maintenance and system operation.

Energy Tracking with ENERGY STAR® Portfolio Manager®



You've heard it before - you can't manage what you don't measure. ENERGY STAR® Portfolio Manager® is an online tool that you can use to measure and track energy and water consumption, as well as greenhouse gas emissions⁴. Your account has already been established. Now you can continue to keep tabs on your energy performance every month.

Lighting Controls

As part of a lighting maintenance schedule, test lighting controls to ensure proper functioning. For occupancy sensors, this requires triggering the sensor and verifying that the sensor's timer settings are correct. For daylight and photocell sensors, maintenance involves cleaning sensor lenses and confirming that setpoints and sensitivity are configured properly.

Thermostat Schedules and Temperature Resets



Use thermostat setback temperatures and schedules to reduce heating and cooling energy use during periods of low or no occupancy. Thermostats should be programmed for a setback of 5-10°F during low occupancy hours (reduce heating setpoints and increase cooling setpoints). Cooling load can be reduced by increasing the facility's occupied setpoint temperature. In general, during the cooling season, thermostats should be set as high as possible without sacrificing occupant comfort.

AC System Evaporator/Condenser Coil Cleaning

Dirty evaporator and condenser coils restrict air flow and restrict heat transfer. This increases the loads on the evaporator and condenser fan, and decreases overall cooling system performance. Keeping the coils clean allows the fans and cooling system to operate more efficiently.

HVAC Filter Cleaning and Replacement

Air filters should be checked regularly (often monthly) and cleaned or replaced when appropriate. Air filters reduce indoor air pollution, increase occupant comfort, and help keep equipment operating efficiently. If the building has a building management system, consider installing a differential pressure switch across filters to send an alarm about premature fouling or overdue filter replacement. Over time, filters become less and less effective as particulate buildup increases. Dirty filters also restrict air flow through the air conditioning or heat pump system, which increases the load on the distribution fans.

https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/use-portfolio-manager.





Boiler Maintenance

Many boiler problems develop slowly over time, so regular inspection and maintenance is essential to keeping the heating system running efficiently and preventing expensive repairs. Annual tune-ups should include a combustion analysis to analyze the exhaust from the boilers and to ensure the boiler is operating safely. Boilers should be cleaned according to the manufacturer's instructions to remove soot and scale from the water side or fire side of the boiler.

Furnace Maintenance

Preventative maintenance can extend the life of the system, maintain energy efficiency, and ensure safe operation. Following the manufacturer's instructions, a yearly tune-up should: check for gas / carbon monoxide leaks; change the air and fuel filters; check components for cracks, corrosion, dirt, or debris build-up; ensure the ignition system is working properly; test and adjust operation and safety controls; inspect electrical connections; and lubricate motors and bearings.

Water Heater Maintenance

Preventative maintenance can extend the life of the system, maintain energy efficiency, and ensure safe operation. At least once a year, follow manufacturer instructions to drain a few gallons out of the water heater using the drain valve. If there is a lot of sediment or debris, then a full flush is recommended. Turn the temperature down and then completely drain the tank. Annual checks should include checks for:

- Leaks or heavy corrosion on the pipes and valves.
- Corrosion or wear on the gas line and on the piping. If you noticed any black residue, soot, or charred metal, this is a sign you may be having combustion issues and you should have the unit serviced by a professional.
- For electric water heaters, look for signs of leaking such as rust streaks or residue around the upper and lower panels covering the electrical components on the tank.
- For water heaters more than three years old, have a technician inspect the sacrificial anode annually.

Plug Load Controls



Reducing plug loads is a common way to decrease your electrical use. Limiting the energy use of plug loads can include increasing occupant awareness, removing under-used equipment, installing hardware controls, and using software controls. Consider enabling the most aggressive power settings on existing devices or install load sensing or occupancy sensing (advanced) power strips⁵. Your local utility may offer incentives or rebates for this equipment.

⁵ For additional information refer to "Assessing and Reducing Plug and Process Loads in Office Buildings" http://www.nrel.gov/docs/fy13osti/54175.pdf, or "Plug Load Best Practices Guide" http://www.advancedbuildings.net/plug-load-best-practices-guide-offices.





Computer Monitor Replacement

ENERGY STAR® labeled computer monitors can be up to 25% more efficient than standard monitors. ENERGY STAR® rated monitors have power consumption requirements for different operating modes such as on, idle, and sleep.

Water Conservation



Installing dual flush or low-flow toilets and low-flow/waterless urinals are ways to reduce water use. The EPA WaterSense™ ratings for urinals is 0.5 gallons per flush (gpf) and for flush valve toilets is 1.28 gpf (this is lower than the current 1.6 gpf federal standard).

For more information regarding water conservation go to the EPA's WaterSense™ website⁶ or download a copy of EPA's "WaterSense™ at Work: Best Management

Practices for Commercial and Institutional Facilities"⁷ to get ideas for creating a water management plan and best practices for a wide range of water using systems.

Water conservation devices that do not reduce hot water consumption will not provide energy savings at the site level, but they may significantly affect your water and sewer usage costs. Any reduction in water use does however ultimately reduce grid-level electricity use since a significant amount of electricity is used to deliver water from reservoirs to end users.

If the facility has detached buildings with a master water meter for the entire campus, check for unnatural wet areas in the lawn or water seeping in the foundation at water pipe penetrations through the foundation. Periodically check overnight meter readings when the Elementary School is unoccupied, and there is no other scheduled water usage.

Manage irrigation systems to use water more effectively outside the building. Adjust spray patterns so that water lands on intended lawns and plantings and not on pavement and walls. Consider installing an evapotranspiration irrigation controller that will prevent over-watering.

Procurement Strategies

Purchasing efficient products reduces energy costs without compromising quality. Consider modifying your procurement policies and language to require ENERGY STAR® or WaterSense™ products where available.

⁶ https://www.epa.gov/watersense

⁷ https://www.epa.gov/watersense/watersense-work-0





6 ON-SITE GENERATION

You don't have to look far in New Jersey to see one of the thousands of solar electric systems providing clean power to homes, businesses, schools, and government buildings. On-site generation includes both renewable (e.g., solar, wind) and non-renewable (e.g., fuel cells) technologies that generate power to meet all or a portion of the Elementary School's electric energy needs. Also referred to as distributed generation, these systems contribute to greenhouse gas (GHG) emission reductions, demand reductions and reduced customer electricity purchases, which results in improved electric grid reliability through better use of transmission and distribution systems.

Preliminary screenings were performed to determine if an on-site generation measure could be a cost-effective solution for the Elementary School. Before deciding to install an on-site generation system, we recommend conducting a feasibility study to analyze existing energy profiles, siting, interconnection, and the costs associated with the generation project including interconnection costs, departing load charges, and any additional special facilities charges.





6.1 Solar Photovoltaic

Photovoltaic (PV) panels convert sunlight into electricity. Individual panels are combined into an array that produces direct current (DC) electricity. The DC current is converted to alternating current (AC) through an inverter. The inverter is then connected to the building's electrical distribution system.

A preliminary screening based on the facility's electric demand, size and location of free area, and shading elements shows that the facility has a **high** potential for expanding the PV array.

The amount of free area, ease of installation (roof), and the lack of shading elements contribute to the high potential. A PV array located on the roof may be feasible. If you are interested in pursuing the installation of PV, we recommend conducting a full feasibility study.

The graphic below displays the results of the PV potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

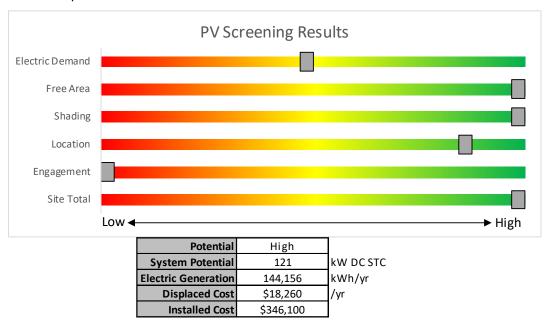


Figure 9 - Photovoltaic Screening

Solar Renewable Energy Certificate (SREC) Registration Program (SRP)

Rebates are not available for solar projects, but owners of solar projects MUST register their projects in the SREC Registration Program before starting construction. Once your PV system is up and running, you periodically earn credits, which can then be sold on the open market for up to 15 years.

If you are considering installing solar photovoltaics on your building, visit www.njcleanenergy.com/srec for more information about the SREC Registration Program.

Get more information about solar power in New Jersey or find a qualified solar installer who can help you decide if solar is right for your building:

- Basic Info on Solar PV in New Jersey: www.njcleanenergy.com/whysolar
- **New Jersey Solar Market FAQs**: <u>www.njcleanenergy.com/renewable-energy/program-updates-and-background-information/solar-transition/solar-market-faqs</u>
- Approved Solar Installers in the New Jersey Market: www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/?id=60&start=1





6.2 Combined Heat and Power

Combined heat and power (CHP) generate electricity at the Elementary School and puts waste heat energy to good use. Common types of CHP systems are reciprocating engines, microturbines, fuel cells, backpressure steam turbines, and (at large facilities) gas turbines.

CHP systems typically produce a portion of the electric power used on-site, with the balance of electric power needs supplied by the local utility company. The heat is used to supplement (or replace) existing boilers and provide space heating and/or domestic hot water heating. Waste heat can also be routed through absorption chillers for space cooling.

The key criteria used for screening is the amount of time that the CHP system would operate at full load and the facility's ability to use the recovered heat. Facilities with a continuous need for large quantities of waste heat are the best candidates for CHP.

A preliminary screening based on heating and electrical demand, siting, and interconnection shows that the facility has **no** potential for installing a cost-effective CHP system.

Based on a preliminary analysis, the facility does not appear to meet the minimum requirements for a cost-effective CHP installation. The lack of gas service, low or infrequent thermal load, and lack of space for siting the equipment are the most significant factors contributing to the lack of CHP potential.

The graphic below displays the results of the CHP potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

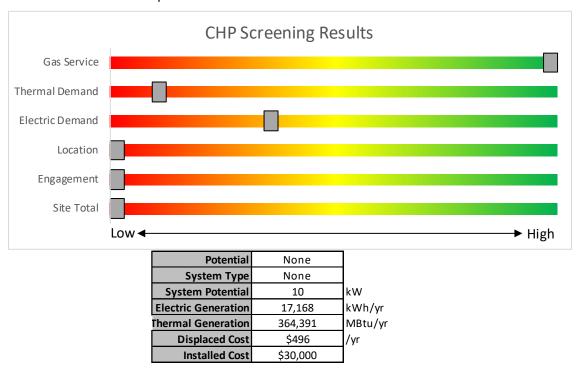


Figure 10 - Combined Heat and Power Screening

Find a qualified firm that specializes in commercial CHP cost assessment and installation: http://www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved vendorsearch/.





7 Project Funding and Incentives

Ready to improve your building's performance? Pick the program that works best for you. Incentive programs that may apply to the Elementary School are identified in the Executive Summary. This section provides an overview of currently available New Jersey's Clean Energy Programs.

	SmartStart Flexibility to install at your own pace	Direct Install Turnkey installation	Pay for Performance Whole building upgrades
Who should use it?	Buildings installing individual measures or small group of measures.	Small to mid-size facilities that can bundle multiple measures together. Average peak demand should be below 200 kW. Not suitable for significant building shell issues.	Mid to large size facilities looking to implement as many measures as possible at one time. Peak demand should be over 200 kW.
How does it work?	Use in-house staff or your preferred contractor.	Pre-approved contractors pass savings along to you via reduced material and labor costs.	Whole-building approach to energy upgrades designed to reduce energy use by at least 15%. The more you save, the higher the incentives.
What are the Incentives?	Fixed incentives for specific energy efficiency measures.	Incentives pay up to 70% of eligible costs, up to \$125,000 per project. You pay the remaining 30% directly to the contractor.	Up to 25% of installation cost, calculated based on level of energy savings per square foot.
How do I participate?	Submit an application for the specific equipment to be installed.	Contact a participating contractor in your region.	Contact a pre-qualified Partner to develop your Energy Reduction Plan and set your energy savings targets.

Take the next step by visiting **www.njcleanenergy.com** for program details, applications, and to contact a qualified contractor.





7.1 SmartStart



SmartStart offers incentives for installing prescriptive and custom energy efficiency measures at your facility. This program provides an effective mechanism for securing incentives for energy efficiency measures installed individually or as part of a package of energy upgrades. This program serves most common equipment types and sizes.

SmartStart routinely adds, removes, or modifies incentives from year-to-year for various energy efficient equipment based on market trends and new technologies.

Equipment with Prescriptive Incentives Currently Available:

Electric Chillers
Electric Unitary HVAC
Gas Cooling
Gas Heating
Gas Water Heating
Ground Source Heat Pumps
Lighting

Lighting Controls
Refrigeration Doors
Refrigeration Controls
Refrigerator/Freezer Motors
Food Service Equipment
Variable Frequency Drives

Incentives

The SmartStart Prescriptive program provides fixed incentives for specific energy efficiency measures. Prescriptive incentives vary by equipment type.

SmartStart Custom provides incentives for more unique or specialized technologies or systems that are not addressed through prescriptive incentives. Custom incentives are calculated at \$0.16/kWh and \$1.60/therm based on estimated annual savings. Incentives are capped at 50% of the total installed incremental project cost, or a project cost buy down to a one-year payback (whichever is less). Program incentives are capped at \$500,000 per electric account and \$500,000 per natural gas account, per fiscal year.

How to Participate

Submit an application for the specific equipment to be installed. Many applications are designed as rebates, although others require application approval prior to installation. You can work with your preferred contractor or use internal staff to install measures.

Visit <u>www.njcleanenergy.com/SSB</u> for a detailed program description, instructions for applying, and applications.





7.2 Direct Install



Direct Install is a turnkey program available to existing small to medium-sized facilities with an average peak electric demand that does not exceed 200 kW over the recent 12-month period. You work directly with a preapproved contractor who will perform a free energy assessment at the Elementary School, identify specific eligible measures, and provide a clear scope of work for

installation of selected measures. Energy efficiency measures may include lighting and lighting controls, refrigeration, HVAC, motors, variable speed drives, and controls.

Incentives

The program pays up to 70% of the total installed cost of eligible measures, up to \$125,000 per project. Each entity is limited to incentives up to \$250,000 per fiscal year.

How to Participate

To participate in Direct Install, you will need to contact the participating contractor assigned to the region of the state where the Elementary School is located. A complete list of Direct Install program partners is provided on the Direct Install website linked below. The contractor will be paid the measure incentives directly by the program, which will pass on to you in the form of reduced material and implementation costs. This means up to 70% of eligible costs are covered by the program, subject to program caps and eligibility, while the remaining 30% of the cost is paid to the contractor by the customer.

Detailed program descriptions and applications can be found at: www.njcleanenergy.com/DI.





7.3 Pay for Performance - Existing Buildings



Pay for Performance works for larger customers with a peak demand over 200 kW. The minimum installed scope of work must include at least two unique measures that results in at least 15% source energy savings, and lighting cannot make up the majority of the savings. P4P is a generally a good option for medium-to-large sized facilities looking to implement as many

measures as possible under a single project to achieve deep energy savings. This program has an added benefit of addressing measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program loan also use this program.

The scope of work presented in this audit report does not quite meet the requirements of the current P4P program. However, due to the size of the facility and existing conditions, should additional measures be identified at a later point in time, for example through further evaluation or the Energy Savings Improvement Program process, this facility could potentially meet the requirements necessary to participate in the P4P program.

Incentives

Incentives are based on estimated and achieved energy savings ranging from \$0.18-\$0.22/kWh and \$1.80-\$2.50/therm, capped at the lesser of 50% total project cost, or \$1 million per electric account and \$1 million per natural gas account, per fiscal year, not to exceed \$2 million per project. An incentive of \$0.15/square foot is also available to offset the cost of developing the Energy Reduction Plan (see below) contingent on the project moving forward with measure installation.

How to Participate

Contact one of the pre-approved consultants and contractors ("Partners"). Under direct contract to you, they will help further evaluate the measures identified in this report through development of the energy reduction plan, assist you in implementing selected measures, and verify actual savings one year after the installation. Your Partner will also help you apply for incentives.

Approval of the final scope of work is required by the program prior to installation. Installation can be done by the contractor of your choice (some P4P Partners are also contractors) or by internal staff, but the Partner remains involved throughout construction to ensure compliance with the program requirements.

Detailed program descriptions, instructions for applying, applications and list of Partners can be found at: www.njcleanenergy.com/P4P.





7.4 Combined Heat and Power

The Combined Heat & Power (CHP) program provides incentives for eligible CHP or waste heat to power (WHP) projects. Eligible CHP or WHP projects must achieve an annual system efficiency of at least 65% (lower heating value, or LHV), based on total energy input and total utilized energy output. Mechanical energy may be included in the efficiency evaluation.

Incentives

Eligible Technologies	Size (Installed Rated Capacity) ¹	Incentive (\$/kW)	% of Total Cost Cap per Project ³	\$ Cap per Project ³
Powered by non- renewable or renewable fuel source ⁴	≤500 kW	\$2,000	30-40% ²	\$2 million
Gas Internal Combustion Engine	>500 kW - 1 MW	\$1,000		
Gas Combustion Turbine	> 1 MW - 3 MW	\$550		
Microturbine Fuel Cells with Heat Recovery	>3 MW	\$350	30%	\$3 million
Waste Heat to	<1 MW	\$1,000	30%	\$2 million
Power*	> 1MW	\$500	30%	\$3 million

^{*}Waste Heat to Power: Powered by non-renewable fuel source, heat recovery or other mechanical recovery from existing equipment utilizing new electric generation equipment (e.g. steam turbine).

Check the NJCEP website for details on program availability, current incentive levels, and requirements.

How to Participate

You work with a qualified developer or consulting firm to complete the CHP application. Once the application is approved the project can be installed. Information about the CHP program can be found at: www.njcleanenergy.com/CHP.





7.5 Energy Savings Improvement Program

The Energy Savings Improvement Program (ESIP) serves New Jersey's government agencies by financing energy projects. An ESIP is a type of performance contract, whereby school districts, counties, municipalities, housing authorities and other public and state entities enter in to contracts to help finance building energy upgrades. Annual payments are lower than the savings projected from the ECMs, ensuring that ESIP projects are cash flow positive for the life of the contract.

ESIP provides government agencies in New Jersey with a flexible tool to improve and reduce energy usage with minimal expenditure of new financial resources. NJCEP incentive programs described above can also be used to help further reduce the total project cost of eligible measures.

How to Participate

This LGEA report is the first step to participating in ESIP. Next, you will need to select an approach for implementing the desired ECMs:

- (1) Use an energy services company or "ESCO."
- (2) Use independent engineers and other specialists, or your own qualified staff, to provide and manage the requirements of the program through bonds or lease obligations.
- (3) Use a hybrid approach of the two options described above where the ESCO is used for some services and independent engineers, or other specialists or qualified staff, are used to deliver other requirements of the program.

After adopting a resolution with a chosen implementation approach, the development of the energy savings plan (ESP) can begin. The ESP demonstrates that the total project costs of the ECMs are offset by the energy savings over the financing term, not to exceed 15 years. The verified savings will then be used to pay for the financing.

The ESIP approach may not be appropriate for all energy conservation and energy efficiency improvements. Carefully consider all alternatives to develop an approach that best meets your needs. A detailed program descriptions and application can be found at: www.njcleanenergy.com/ESIP.

ESIP is a program delivered directly by the NJBPU and is not an NJCEP incentive program. As mentioned above, you can use NJCEP incentive programs to help further reduce costs when developing the energy savings plan. Refer to the ESIP guidelines at the link above for further information and guidance on next steps.





7.6 SREC Registration Program

The SREC (Solar Renewable Energy Certificate) Registration Program (SRP) is used to register the intent to install solar projects in New Jersey. Rebates are not available for solar projects, but owners of solar projects *must* register their projects prior to the start of construction to establish the project's eligibility to earn SRECs. Registration of the intent to participate in New Jersey's solar marketplace provides market participants with information about the pipeline of anticipated new solar capacity and insight into future SREC pricing.

After the registration is accepted, construction is complete, and final paperwork has been submitted and is deemed complete, the project is issued a New Jersey certification number, which enables it to generate New Jersey SRECs. SREC's are generated once the solar project has been authorized to be energized by the Electric Distribution Company (EDC).

Each time a solar installation generates 1,000 kilowatt-hours (kWh) of electricity, an SREC is earned. Solar project owners report the energy production to the SREC Tracking System. This reporting allows SREC's to be placed in the customer's electronic account. SRECs can then be sold on the SREC Tracking System, providing revenue for the first 15 years of the project's life.

Electricity suppliers, the primary purchasers of SRECs, are required to pay a Solar Alternative Compliance Payment (SACP) if they do not meet the requirements of New Jersey's Solar Renewable Portfolio Standard. Purchasing SRECs can help them meet those requirements. As SRECs are traded in a competitive market, the price may vary significantly. The actual price of an SREC during a trading period fluctuates depending on supply and demand.

Information about the SRP can be found at: www.njcleanenergy.com/srec.





8 ENERGY PURCHASING AND PROCUREMENT STRATEGIES

8.1 Retail Electric Supply Options

Energy deregulation in New Jersey has increased energy buyers' options by separating the function of electricity distribution from that of electricity supply. So, though you may choose a different company from which to buy your electric power, responsibility for the Elementary School's interconnection to the grid and repair to local power distribution will still reside with the traditional utility company serving your region.

If your facility is not purchasing electricity from a third-party supplier, consider shopping for a reduced rate from third-party electric suppliers. If your facility already buys electricity from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party electric suppliers is available at the NJBPU website⁸.

8.2 Retail Natural Gas Supply Options

The natural gas market in New Jersey is also deregulated. Most customers that remain with the utility for natural gas service pay rates that are market-based and that fluctuate monthly. The utility provides basic gas supply service (BGSS) to customers who choose not to buy from a third-party supplier for natural gas commodity.

A customer's decision about whether to buy natural gas from a retail supplier typically depends on whether a customer prefers budget certainty and/or longer-term rate stability. Customers can secure longer-term fixed prices by signing up for service through a third-party retail natural gas supplier. Many larger natural gas customers may seek the assistance of a professional consultant to assist in their procurement process.

If your facility does not already purchase natural gas from a third-party supplier, consider shopping for a reduced rate from third-party natural gas suppliers. If your facility already purchases natural gas from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party natural gas suppliers is available at the NJBPU website⁹.

⁸ www.state.nj.us/bpu/commercial/shopping.html

⁹ www.state.nj.us/bpu/commercial/shopping.html





APPENDIX A: EQUIPMENT INVENTORY & RECOMMENDATIONS

Lighting Inventory & Recommendations

Ligiting inv		g Conditions	10113				Prop	osed Conditio	ns						FnergyJr	npact & F	inancial 4	nalysis			
Location	Fixture Quantit y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Mechanical room	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Electrical room	6	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	6	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	\$0	\$0	\$0	0.0
DHW room	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,216		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	\$0	\$0	\$0	0.0
MPR	24	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	24	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.2	763	0	\$95	\$540	\$70	4.9
MPR	2	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1	Relamp	No	2	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	3,216	0.0	110	0	\$14	\$69	\$4	4.7
MPR stage	10	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	10	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	318	0	\$40	\$270	\$35	5.9
MPR	4	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	4	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
MPR storage	6	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.0	191	0	\$24	\$116	\$0	4.9
Kitchen	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen storage	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen office	1	LED - Linear Tubes: (2) 4' Lamps	Switch	S	29	3,216		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen restroom	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Switch	29	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen restroom	1	LED Lamps: Screw-in 1 lamp	Switch	S	10	3,216		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Vestibules	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Vestibules	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
100 KG	15	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	15	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	477	0	\$59	\$270	\$35	4.0
100 KG	2	Exit Signs: LED - 2 W Lamp	None Wall		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None Wall	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
100 KG restroom	1	LED Lamps: Screw-in 1 lamp	Switch	S	10	3,216		None	No	1	LED Lamps: Screw-in 1 lamp	Switch Occupanc	10	3,216	0.0	0	0	\$0	\$0	\$0	0.0
101 KG	15	LED - Linear Tubes: (2) 4' Lamps	Switch	S	29	3,216	2	None	Yes	15	LED - Linear Tubes: (2) 4' Lamps	y Sensor	29	2,219	0.1	477	0	\$59	\$270	\$35	4.0
101 KG	1	Exit Signs: LED - 2 W Lamp	None Wall		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None Wall	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
101 KG restroom	1	LED Lamps: Screw-in 1 lamp	Switch	S	10	3,216		None	No	1	LED Lamps: Screw-in 1 lamp	Switch Occupanc	10	3,216	0.0	0	0	\$0	\$0	\$0	0.0
102 KG	15	LED - Linear Tubes: (2) 4' Lamps	Switch	S	29	3,216	2	None	Yes	15	LED - Linear Tubes: (2) 4' Lamps	y Sensor	29	2,219	0.1	477	0	\$59	\$270	\$35	4.0
102 KG	1	Exit Signs: LED - 2 W Lamp	None Wall		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None Wall	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
102 KG restroom	1	LED Lamps: Screw-in 1 lamp	Switch	S	10	3,216		None	No	1	LED Lamps: Screw-in 1 lamp	Switch	10	3,216	0.0	0	0	\$0	\$0	\$0	0.0





	Existin	g Conditions					Prop	osed Conditio	ons						Energy I	mpact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
100 KG hallway	2	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	S	58	3,216	3	None	Yes	2	LED - Linear Tubes: (4) 4' Lamps	High/Low Control	58	2,219	0.0	127	0	\$16	\$225	\$0	14.2
100 KG hallway	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
103 KG	10	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	10	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	318	0	\$40	\$270	\$35	5.9
103 KG	3	Compact Fluores cent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1, 2	Relamp	Yes	3	LED Lamps: 4 pin - 2 lamps	Occupano y Sensor	36	2,219	0.1	285	0	\$36	\$103	\$6	2.7
103 KG	5	LED Lamps: Screw-in 1 lamp	Wall Switch	s	10	3,216	2	None	Yes	5	LED Lamps: Screw-in 1 lamp	Occupano y Sensor	10	2,219	0.0	55	0	\$7	\$270	\$35	34.4
103 KG restroom	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen storage	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Dragon drive hall	3	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	3	None	Yes	3	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,219	0.0	95	0	\$12	\$225	\$0	18.9
Main lobby	6	Compact Fluores cent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1	Relamp	No	6	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	3,216	0.1	331	0	\$41	\$207	\$12	4.7
Main entrance	2	Compact Fluores cent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1	Relamp	No	2	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	3,216	0.0	110	0	\$14	\$69	\$4	4.7
Main entrance	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Teachers' lounge	8	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	s	44	3,216	2	None	Yes	8	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	2,219	0.1	382	0	\$48	\$270	\$35	4.9
Teachers' lounge restroom	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,216		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Teachers' lounge hallway	3	LED - Linear Tubes : (2) 4' Lamps	Wall Switch	S	29	3,216	3	None	Yes	3	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,219	0.0	95	0	\$12	\$225	\$0	18.9
Boys 1st floor	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	2,219	0.0	64	0	\$8	\$270	\$0	34.1
Custodian closet	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Girls 1st floor	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.0	64	0	\$8	\$270	\$0	34.1
Room 104	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6
Room 105	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6
Room 106	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6
Room 107	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6
Room 108	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6
Room 109	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6
Pod hall	18	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	3	None	Yes	18	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,219	0.1	572	0	\$71	\$675	\$0	9.5
Pod hall	4	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	4	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0





	Existin	g Conditions					Prop	osed Conditio	ns						Energy Ir	npact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Vestibule 15	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Vestibule 15	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Room 110	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6
Room 111	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6
Room 112	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6
Room 113	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6
Room 114	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6
Room 115	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6
110 Pod hall	7	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,216	3	None	Yes	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,219	0.0	223	0	\$28	\$225	\$0	8.1
110 Pod hall	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Girls 1st floor	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,216	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.0	64	0	\$8	\$270	\$0	34.1
Boys 1st floor	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.0	64	0	\$8	\$270	\$0	34.1
Custodian closet	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,216		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	\$0	\$0	\$0	0.0
125 Electric room	4	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,216		None	No	4	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	\$0	\$0	\$0	0.0
116 SGI	6	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	6	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,219	0.1	286	0	\$36	\$270	\$35	6.6
14 Vestibule	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	\$0	\$0	\$0	0.0
117 SGI	5	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	5	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,219	0.0	239	0	\$30	\$270	\$35	7.9
Faculty restroom - Men	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,216		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Faculty restroom - Women	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,216		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Hall by Vestibule 14	6	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	3	None	Yes	6	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,219	0.0	191	0	\$24	\$225	\$0	9.5
Hall by Vestibule 14	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Room 118	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6
Room 119	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6
Room 120	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6
Room 121	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6





	Existin	g Conditions					Prop	osed Conditio	ns						Energy Ir	npact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Room 122	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.1	286	0	\$36	\$270	\$35	6.6
120 Pod hall	9	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,216	3	None	Yes	9	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,219	0.1	286	0	\$36	\$225	\$0	6.3
120 Pod hall	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
123 SGI	6	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216		None	No	6	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Media center	31	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	31	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.2	986	0	\$123	\$540	\$70	3.8
Media center	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
MC Office	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,219	0.0	95	0	\$12	\$116	\$20	8.1
MC storage	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,219	0.0	95	0	\$12	\$116	\$0	9.8
Boys restroom	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.0	64	0	\$8	\$270	\$0	34.1
Custodian lounge	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Girls restroom	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.0	64	0	\$8	\$270	\$0	34.1
Room 123A	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,219	0.0	95	0	\$12	\$116	\$20	8.1
Hall by MPR	14	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	3	None	Yes	14	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,219	0.1	445	0	\$55	\$450	\$0	8.1
Hall by MPR	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Tech room	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,219	0.0	95	0	\$12	\$116	\$20	8.1
Principal office	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,219	0.0	95	0	\$12	\$116	\$20	8.1
Conference room	4	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	4	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,219	0.0	191	0	\$24	\$116	\$20	4.0
Guidance office	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,219	0.0	95	0	\$12	\$116	\$20	8.1
Main office	3	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	S	58	3,216	2	None	Yes	3	LED - Linear Tubes: (4) 4' Lamps	Occupanc y Sensor	58	2,219	0.0	191	0	\$24	\$116	\$20	4.0
Main office kitchen	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216	2	None	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,219	0.0	95	0	\$12	\$116	\$20	8.1
Main office restroom	1	LED Lamps: Screw-in 1 lamp	Wall Switch	S	10	3,216		None	No	1	LED Lamps: Screw-in 1 lamp	Wall Switch	10	3,216	0.0	0	0	\$0	\$0	\$0	0.0
Main office	2	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1	Relamp	No	2	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	3,216	0.0	110	0	\$14	\$69	\$4	4.7
Main office	7	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1, 2	Relamp	Yes	7	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	2,219	0.1	666	0	\$83	\$511	\$49	5.6
New addition - 126 Nurse	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	S	44	2,219		None	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	44	2,219	0.0	0	0	\$0	\$0	\$0	0.0
New addition - 126 Nurse	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	S	29	2,219		None	No	3	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.0	0	0	\$0	\$0	\$0	0.0





	Existing	g Conditions					Prop	osed Conditio	ons						Energy I	mpact & F	inancial A	Analysis			
Location	Fixture Quantit y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit Y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
126 restroom	1	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	S	29	2,219		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	2,219	0.0	0	0	\$0	\$0	\$0	0.0
126 office	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	S	44	2,219		None	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	2,219	0.0	0	0	\$0	\$0	\$0	0.0
124 computer lab	11	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	s	44	2,219		None	No	11	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	2,219	0.0	0	0	\$0	\$0	\$0	0.0
124 copy room	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	s	29	2,219		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	2,219	0.0	0	0	\$0	\$0	\$0	0.0
117 Electrical room	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	s	29	2,219		None	No	2	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	2,219	0.0	0	0	\$0	\$0	\$0	0.0
118 server room	4	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	S	29	2,219		None	No	4	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	2,219	0.0	0	0	\$0	\$0	\$0	0.0
125 Music room	16	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	s	29	2,219		None	No	16	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	2,219	0.0	0	0	\$0	\$0	\$0	0.0
127 SGI	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	s	29	2,219		None	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	2,219	0.0	0	0	\$0	\$0	\$0	0.0
128 Practice	3	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	s	44	2,219		None	No	3	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	2,219	0.0	0	0	\$0	\$0	\$0	0.0
115 Music office	2	LED - Linear Tubes: (3) 4' Lamps	Occupanc y Sensor	S	44	2,219		None	No	2	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	44	2,219	0.0	0	0	\$0	\$0	\$0	0.0
130 Music room	10	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	S	29	2,219		None	No	10	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	2,219	0.0	0	0	\$0	\$0	\$0	0.0
130 Music room	3	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216		None	No	3	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	3,216	0.0	0	0	\$0	\$0	\$0	0.0
129 SGI	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	s	29	2,219		None	No	6	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	2,219	0.0	0	0	\$0	\$0	\$0	0.0
5th grade hall	12	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	3	None	Yes	12	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,219	0.1	382	0	\$48	\$450	\$0	9.5
5th grade hall	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
5th grade hall	9	Compact Fluorescent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1, 3	Relamp	Yes	9	LED Lamps: 4 pin - 2 lamps	High/Low Control	36	2,219	0.2	856	0	\$107	\$535	\$18	4.9
Vestibule 9	1	Compact Fluores cent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1	Relamp	No	1	LED Lamps: 4 pin - 2 lamps	Wall Switch	36	3,216	0.0	55	0	\$7	\$34	\$2	4.7
Room 131	12	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	2,219	0.1	382	0	\$48	\$270	\$35	4.9
Room 132	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	S	29	2,219		None	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	2,219	0.0	0	0	\$0	\$0	\$0	0.0
133 CR	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	S	29	2,219		None	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	2,219	0.0	0	0	\$0	\$0	\$0	0.0
134 art room	12	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	S	29	2,219		None	No	12	LED - Linear Tubes: (2) 4' Lamps	Occupano y Sensor	29	2,219	0.0	0	0	\$0	\$0	\$0	0.0
Hall by gym	4	LED - Linear Tubes: (4) 4' Lamps	Wall Switch	S	58	3,216	3	None	Yes	4	LED - Linear Tubes: (4) 4' Lamps	High/Low Control	58	2,219	0.1	254	0	\$32	\$225	\$0	7.1
Hall by gym	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Hall by gym	7	LED Lamps: Screw-in 2 lamps	Wall Switch	S	20	3,216	3	None	Yes	7	LED Lamps: Screw-in 2 lamps	High/Low Control	20	2,219	0.0	154	0	\$19	\$225	\$0	11.8
Gym	24	Linear Fluores cent - T5HO: 4' T5HO (54W) - 3L	Wall Switch	S	179	3,216	1, 2	Relamp	Yes	24	LED - Linear Tubes: (3) 4' Lamps	Occupano y Sensor	143	2,219	1.4	6,808	-1	\$848	\$2,395	\$500	2.2





	Existin	g Conditions					Prop	osed Conditio	ns						Energy In	npact & F	inancial A	nalysis			
Location	Fixture Quantit Y	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM #	Fixture Recommendation	Add Controls?	Fixture Quantit y	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Gym	7	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	7	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Boys restroom	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	s	29	3,216	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.0	64	0	\$8	\$270	\$0	34.1
Boys restroom	1	Compact Fluores cent: 4 pin - 2 lamps	Wall Switch	s	52	3,216	1, 2	Relamp	Yes	1	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	2,219	0.0	95	0	\$12	\$34	\$2	2.7
Girls restroom	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.0	64	0	\$8	\$270	\$0	34.1
Girls restroom	1	Compact Fluores cent: 4 pin - 2 lamps	Wall Switch	S	52	3,216	1, 2	Relamp	Yes	1	LED Lamps: 4 pin - 2 lamps	Occupanc y Sensor	36	2,219	0.0	95	0	\$12	\$34	\$2	2.7
Wall pack	7	Compact Fluorescent: Wall mount - 4 pin - 2 lamps	Timecloc k		64	4,380	1	Relamp	No	7	LED Lamps: Wall mount - 4 pin - 2 lamps	Timecloc k	45	4,380	0.1	589	0	\$75	\$241	\$14	3.0
Wall pack	12	Compact Fluorescent: Wall mount - 4 pin - 1 lamp	Timecloc k		75	4,380	1	Relamp	No	12	LED Lamps: Wall mount - 4 pin - 1 lamp	Timecloc k	53	4,380	0.1	1,183	0	\$150	\$207	\$12	1.3
Canopy	6	Compact Fluorescent: Outside door - 4 pin - 1 lamp	Timecloc k		32	4,380	1	Relamp	No	6	LED Lamps: Outside door - 4 pin - 1 lamp	Timecloc k	22	4,380	0.0	252	0	\$32	\$103	\$6	3.0
Area light	1	Compact Fluorescent: Wall mount - 4 pin - 1 lamp	Timecloc k		75	4,380	1	Relamp	No	1	LED Lamps: Wall mount - 4 pin - 1 lamp	Timecloc k	53	4,380	0.0	99	0	\$12	\$17	\$1	1.3
Canopy	2	Compact Fluorescent: Screw-in - Door outside - round lamp	Timecloc k		52	4,380	1	Relamp	No	2	LED Lamps: Screw-in - Door outside - round lamp	Timecloc k	36	4,380	0.0	137	0	\$17	\$69	\$4	3.7
Parking lot	10	Compact Fluorescent: Pole mount - Long circular	Timecloc k		64	4,380	1	Relamp	No	10	LED Lamps: Pole mount - Long circular	Timecloc k	45	4,380	0.1	841	0	\$107	\$172	\$10	1.5
Parking lot	11	Compact Fluorescent: Pole mount - Long circular	Timecloc k		75	4,380	1	Relamp	No	11	LED Lamps: Pole mount - Long circular	Timecloc k	53	4,380	0.1	1,084	0	\$137	\$189	\$11	1.3
111 Gym storage	6	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,216	2	None	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupanc y Sensor	29	2,219	0.0	191	0	\$24	\$270	\$0	11.4
136 office	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	S	44	3,216		None	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	3,216	0.0	0	0	\$0	\$0	\$0	0.0





Motor Inventory & Recommendations

	tory & Necon		g Conditions						Prop	osed Co	ndition	s		Energy In	npact & Fir	ancial An	alysis			
Location	Area(s)/System(s) Served	Motor Quantit y	Motor Application	HP Per Motor	Full Load Efficienc Y	VFD Control?	Remaining Useful Life	Annual Operating Hours	ECM #	Install High Efficienc y Motors?	Full Load Efficiency		Numbe r of VFDs	Total Peak kW Savings		Total Annual MMBtu Savings		Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Boiler room	HWP 1,2	2	Heating Hot Water Pump	5.0	90.2%	No	W	2,745	5	No	90.2%	Yes	2	1.0	8,513	0	\$1,079	\$8,394	\$0	7.8
Boiler room	AHU	1	Supply Fan	7.5	91.7%	No	W	3,391	4	No	91.7%	Yes	1	2.1	7,759	0	\$983	\$4,761	\$600	4.2
Roof	EF	1	Exhaust Fan	0.8	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-6	1	Supply Fan	5.0	89.5%	Yes	В	3,300		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-6	1	Exhaust Fan	3.0	89.5%	Yes	В	3,300		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-9	1	Supply Fan	2.0	86.5%	Yes	В	3,300		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-9	1	Exhaust Fan	1.0	85.5%	Yes	В	3,300		No	85.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-5	1	Supply Fan	5.0	89.5%	Yes	В	3,300		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-5	1	Exhaust Fan	5.0	89.5%	Yes	В	3,300		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-3	1	Supply Fan	7.5	91.7%	No	В	3,300		No	91.7%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-3	1	Exhaust Fan	1.0	85.5%	No	В	3,300		No	85.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-1	1	Supply Fan	7.5	91.7%	No	В	3,300		No	91.7%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-1	1	Exhaust Fan	1.0	85.5%	No	В	3,300		No	85.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-2	1	Supply Fan	10.0	91.7%	No	В	3,300		No	91.7%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-2	1	Exhaust Fan	1.5	86.5%	No	В	3,300		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-8	1	Supply Fan	1.0	85.5%	Yes	В	3,300		No	85.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-8	1	Exhaust Fan	1.0	85.5%	Yes	В	3,300		No	85.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-4	1	Supply Fan	5.0	89.5%	No	В	3,300		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-4	1	Exhaust Fan	1.0	85.5%	No	В	3,300		No	85.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	EF-4	1	Exhaust Fan	0.3	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0





		Existin	g Conditions						Prop	osed Co	ndition	5		Energy Im	pact & Fir	ancial An	alysis			
Location	Area(s)/System(s) Served	Motor Quantit Y	Motor Application		Full Load Efficienc Y	VFD	Remaining Useful Life	Annual Operating Hours		Install High Efficienc y Motors?	Full Load Efficiency	Install VFDs?	Numbe r of VFDs	Total Peak kW Savings	k\A/h	Total Annual MMBtu Savings		Total Installation Cost		Simple Payback w/ Incentives in Years
Gym Storage	DHW Recirculation	1	Water Supply Pump	0.1	60.0%	No	w	8,760		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Various spaces	Various spaces	8	Supply Fan	0.3	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Various spaces	10	Exhaust Fan	0.3	60.0%	No	w	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0





Electric HVAC Inventory & Recommendations

	Area(s)/System(s) Ouantit System Type Capacit Capacit Capacit							osed Co	ndition	nc.					Enorgy In	nact & Eir	nancial An	alveie			
Location		System			Heating Capacity per Unit (MBh)	Remaining Useful Life	ECM #	Install High Efficienc y System?	System Quantit y	System Type	Cooling Capacit y per Unit (Tons)	Heating Capacity per Unit (MBh)	Cooling Mode Efficiency (SEER/EER	Heating Mode Efficiency (COP)	Total Peak	Total Annual kWh Savings	Total Annual MMBtu Savings		Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Boiler room	Wall hung	1	Electric Resistance Heat		10.23	W		No							0.0	0	0	\$0	\$0	\$0	0.0
Electrical room	Wall hung	1	Electric Resistance Heat		10.23	W		No							0.0	0	0	\$0	\$0	\$0	0.0
Roof	125-Electrical room	1	Split-System AC	1.00		В	6	Yes	1	Split-System AC	1.00		14.00		0.1	185	0	\$23	\$1,496	\$92	59.8
Roof	117 Electrical room	1	Split-System AC	1.00		В	6	Yes	1	Split-System AC	1.00		14.00		0.1	185	0	\$23	\$1,496	\$92	59.8
Roof	118-Server room	1	Split-System AC	1.00		В	6	Yes	1	Split-System AC	1.00		14.00		0.1	185	0	\$23	\$1,496	\$92	59.8
Roof	Unknown	1	Split-System AC	3.00		В	6	Yes	1	Split-System AC	3.00		14.00		0.5	751	0	\$95	\$4,489	\$276	44.3
Roof	Gym - RTU-6	1	Packaged AC	13.00		В	6	Yes	1	Packaged AC	13.00		11.50		1.4	2,085	0	\$264	\$18,120	\$1,027	64.7
Roof	New Hall - RTU-9	1	Packaged AC	18.00		В	6	Yes	1	Packaged AC	18.00		11.50		2.0	2,887	0	\$366	\$25,089	\$1,422	64.7
Roof	5th grade hallway - RTU-5	1	Packaged AC	25.00		В	6	Yes	1	Packaged AC	25.00		10.50		1.5	2,195	0	\$278	\$42,185	\$1,975	144.6
Roof	RTU-3	1	Packaged AC	30.00		В	6	Yes	1	Packaged AC	30.00		10.00		2.0	2,920	0	\$370	\$66,479	\$0	179.7
Roof	RTU-1	1	Packaged AC	20.00		В	6	Yes	1	Packaged AC	20.00		10.50		1.9	2,781	0	\$352	\$33,748	\$1,580	91.3
Roof	Office	1	Split-System AC	2.00		В	6	Yes	1	Split-System AC	2.00		14.00		0.3	371	0	\$47	\$2,992	\$184	59.8
Roof	RTU-2	1	Packaged AC	30.00		В	6	Yes	1	Packaged AC	30.00		10.00		2.0	2,920	0	\$370	\$66,479	\$0	179.7
Roof	Library and Computer lab RTU- 8	1	Packaged AC	10.00		В	6	Yes	1	Packaged AC	10.00		10.50		1.0	1,390	0	\$176	\$17,821	\$730	97.0
Roof	RTU-4	1	Packaged AC	30.00		В	6	Yes	1	Packaged AC	30.00		10.00		2.0	2,920	0	\$370	\$66,479	\$0	179.7
Roof	Office	1	Split-System AC	1.50		В	6	Yes	1	Split-System AC	1.50		14.00		0.2	278	0	\$35	\$2,244	\$138	59.8
Upper roof	Cafeteria	4	Packaged AC	7.00		N		No							0.0	0	0	\$0	\$0	\$0	0.0
Classrooms	Classrooms	30	Electric Resistance Heat		3.41	W		No							0.0	0	0	\$0	\$0	\$0	0.0
Mechanical room, Electrical room, kitchen storage and DHW room	Mechanical room, Electrical room, kitchen storage and DHW room	5	Electric Resistance Heat		10.23	W		No							0.0	0	0	\$0	\$0	\$0	0.0





Fuel Heating Inventory & Recommendations

		Existin	g Conditions			Prop	osed Co	nditior	ıs				Energy Im	npact & Fir	nancial An	alysis			
Location	Area(s)/System(s) Served	System Quantit y	System Type	Output Capacit y per Unit (MBh)	Remaining Useful Life		Install High Efficienc y System?	System Quantit y	System Type	Output Capacit y per Unit (MBh)	Heating Efficienc Y	Heating Efficienc y Units	Total Peak	kWh	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Boiler room	Boiler 1,2	2	Non-Condensing Hot Water Boiler	849.00	W		No						0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-6	1	Furnace	146.00	В	7	Yes	1	Furnace	146.00	95.00%	AFUE	0.0	0	9	\$92	\$3,308	\$400	31.4
Roof	RTU-1	1	Furnace	350.00	В	7	Yes	1	Furnace	350.00	95.00%	AFUE	0.0	0	21	\$222	\$7,930	\$400	34.0
Roof	RTU-3	1	Furnace	475.00	В	7	Yes	1	Furnace	475.00	95.00%	AFUE	0.0	0	29	\$301	\$10,762	\$400	34.4
Roof	RTU-2	1	Furnace	500.00	В	7	Yes	1	Furnace	500.00	95.00%	AFUE	0.0	0	30	\$317	\$11,329	\$400	34.5
Roof	RTU-8	1	Furnace	146.00	В	7	Yes	1	Furnace	146.00	95.00%	AFUE	0.0	0	10	\$100	\$3,308	\$400	29.0
Roof	RTU-4	1	Furnace	300.00	В	7	Yes	1	Furnace	300.00	95.00%	AFUE	0.0	0	20	\$206	\$6,797	\$400	31.0
Roof	RTU-9	1	Furnace	219.00	В	7	Yes	1	Furnace	219.00	95.00%	AFUE	0.0	0	14	\$150	\$4,962	\$400	30.3
Roof	RTU-5	1	Furnace	219.00	В	7	Yes	1	Furnace	219.00	95.00%	AFUE	0.0	0	14	\$150	\$4,962	\$400	30.3

DHW Inventory & Recommendations

		Existin	g Conditions		Prop	osed Co	nditio	ns				Energy In	pact & Fir	nancial An	alysis			
Location	Area(s)/System(s)	System Quantit y	System Type	Remaining Useful Life		Replace?	System Quantit Y	System Type	Fuel Type			Total Peak kW Savings	kWh		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Boiler room	Old section	1	Storage Tank Water Heater (> 50 Gal)	w		No						0.0	0	0	\$0	\$0	\$0	0.0
Boiler room	New section	1	Storage Tank Water Heater (> 50 Gal)	В	8	Yes	1	Storage Tank Water Heater (> 50 Gal)	Natural Gas	90.00%	Et	0.0	0	13	\$138	\$8,669	\$300	60.7

Low-Flow Device Recommendations

	Reco	mmeda	ation Inputs			Energy In	pact & Fir	nancial An	alysis			
Location	ECM #	Device Quantit Y	Device Type	Existing Flow Rate (gpm)	Proposed Flow Rate (gpm)	Total Peak kW Savings	Total Annual kWh Savings			Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Restrooms	9	22	Faucet Aerator (Lavatory)	2.20	0.50	0.0	0	31	\$330	\$158	\$0	0.5





Walk-In Cooler/Freezer Inventory & Recommendations

	Existin	g Conditions	Propo	osed Condi	tions		Energy In	npact & Fir	nancial An	alysis			
Location	Cooler/ Freezer Quantit y	Case	ECM #	Install EC Evaporator Fan Motors?	Install Electric Defrost Control?	Install Evaporator Fan Control?	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	1	Cooler (35F to 55F)		No	No	No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Medium Temp Freezer (0F to 30F)		No	No	No	0.0	0	0	\$0	\$0	\$0	0.0

Commercial Refrigerator/Freezer Inventory & Recommendations

	Existin	g Conditions		Proposed	Conditions	Energy In	npact & Fir	nancial An	alysis			
Location	Quantit y	Refrigerator/ Freezer Type	ENERGY STAR Qualified?	ECM #	Install ENERGY STAR Equipment?	Total Peak kW Savings	k\A/b		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	1	Refrigerator Chest	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Refrigerator Chest	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Stand-Up Refrigerator, Solid Door (16 - 30 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Refrigerator Chest	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0





Cooking Equipment Inventory & Recommendations

	Existing	Conditions		Proposed	Conditions	Energy I	mpact & F	inancial A	nalysis			
Location	Quantity	Equipment Type	High Efficiency Equipement?	ECM #	Install High Efficiency Equipment?	Total Peak kW Savings	Total Annual kWh Savings			Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	1	Gas Convection Oven (Half Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Gas Convection Oven (Half Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Insulated Food Holding Cabinet (1/2 Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0





Plug Load Inventory

	Existin	g Conditions		
Location	Quantit y	Equipment Description	Energy Rate (W)	ENERGY STAR Qualified ?
Lillian M. Dunfee ES	133	Desktop Computer	145.0	Yes
Lillian M. Dunfee ES	10	Chrome book carts	40.0	Yes
Lillian M. Dunfee ES	6	Servers	1,200.0	Yes
Lillian M. Dunfee ES	14	Printer Small	60.0	Yes
Lillian M. Dunfee ES	3	Printer Medium	80.0	Yes
Lillian M. Dunfee ES	5	Printer Big	200.0	Yes
Lillian M. Dunfee ES	35	Projector	200.0	Yes
Lillian M. Dunfee ES	3	Microwave	900.0	Yes
Lillian M. Dunfee ES	1	Refrigerator Small	60.0	Yes
Lillian M. Dunfee ES	1	Refrigerator Medium	80.0	Yes
Lillian M. Dunfee ES	4	Refrigerator Large	220.0	Yes
Lillian M. Dunfee ES	2	To a ster oven	1,200.0	Yes
Lillian M. Dunfee ES	3	Portable fan	60.0	Yes
Lillian M. Dunfee ES	5	Television - CRT	120.0	Yes
Lillian M. Dunfee ES	2	Television- LCD	100.0	Yes
Lillian M. Dunfee ES	1	Hot and Cold Dispenser	520.0	Yes
Lillian M. Dunfee ES	3	Steam Tables	1,500.0	Yes
Lillian M. Dunfee ES	35	Smart Board	5.0	Yes
Lillian M. Dunfee ES	1	Kiln	11,520.0	Yes





Vending Machine Inventory & Recommendations

	Existing Conditions		Proposed Conditions		Energy Impact & Financial Analysis						
Location	Quantit Y	Vending Machine Type	ECM #	Install Controls?	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Teacher's lounge	1	Refrigerated	10	Yes	0.2	1,612	0	\$204	\$230	\$50	0.9





APPENDIX B: ENERGY STAR® STATEMENT OF ENERGY PERFORMANCE

EUI is presented in terms of *site energy* and *source energy*. Site energy is the amount of fuel and electricity consumed by a building as reflected in utility bills. Source energy includes fuel consumed to generate electricity consumed at the site, factoring in electric production and distribution losses for the region.



ENERGY STAR[®] Statement of Energy Performance

57

Lillian M Dunfee Elementary School

Primary Property Type: K-12 School Gross Floor Area (ft²): 70,817

For Year Ending: January 31, 2019

Built: 1974

ENERGY STAR® Score¹ Date Generated: July 30, 2019

1. The ENERGY STAR score is a 1-100 assessment of a building's energy efficiency as compared with similar buildings nationwide, adjusting for climate and business activity.

Property & Contact Information Property Address Property Owner Primary Contact Barnegat Township School District Lillian M Dunfee Elementary School Stephen Brennan 128 Barnegat Blvd South 550 BARENGAT BLVD. NORTH 550 BARENGAT BLVD. NORTH Barnegat, New Jersey 08005 Barnegat, NJ 08005 Barnegat, NJ 08005 609-698-5800 SBRENNAN@BARNEGATSCHOOLS.COI Property ID: 7071644 Energy Consumption and Energy Use Intensity (EUI) National Median Comparison Site EUI Annual Energy by Fuel 1,703,015 (46%) 56.4 Natural Gas (kBtu) National Median Site EUI (kBtu/ft2) 52.7 kBtu/ft2 Electric - Grid (kBtu) 2,027,082 (54%) National Median Source EUI (kBtu/ft2) 113 % Diff from National Median Source EUI -7% Source EUI Annual Emissions Greenhouse Gas Emissions (Metric Tons 296 105.4 kBtu/ft2 CO2e/year) Signature & Stamp of Verifying Professional (Name) verify that the above information is true and correct to the best of my knowledge. Signature: Date: Licensed Professional

Professional Engineer Stamp (if applicable)





APPENDIX C: GLOSSARY

TERM	DEFINITION				
Blended Rate	Used to calculate fiscal savings associated with measures. The blended rate is calculated by dividing the amount of your bill by the total energy use. For example, if your bill is \$22,217.22, and you used 266,400 kilowatt-hours, your blended rate is 8.3 cents per kilowatt-hour.				
Btu	British thermal unit: a unit of energy equal to the amount of heat required to increase the temperature of one pound of water by one-degree Fahrenheit.				
СНР	Combined heat and power. Also referred to as cogeneration.				
СОР	Coefficient of performance: a measure of efficiency in terms of useful energy delivered divided by total energy input.				
Demand Response	Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives.				
DCV	Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need.				
US DOE	United States Department of Energy				
EC Motor	Electronically commutated motor				
ЕСМ	Energy conservation measure				
EER	Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input.				
EUI	Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance.				
Energy Efficiency	Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service.				
ENERGY STAR®	ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA.				
EPA	United States Environmental Protection Agency				
Generation	The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil).				
GHG	Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from leaving Earth's atmosphere. The net effect is a trapping of absorbed radiation and a tendency to warm the planet's surface.				
gpf	Gallons per flush				





gpm	Gallon per minute
HID	High intensity discharge: high-output lighting lamps such as high-pressure sodium, metal halide, and mercury vapor.
hp	Horsepower
HPS	High-pressure sodium: a type of HID lamp.
HSPF	Heating seasonal performance factor: a measure of efficiency typically applied to heat pumps. Heating energy provided divided by seasonal energy input.
HVAC	Heating, ventilating, and air conditioning
IHP 2014	US DOE Integral Horsepower rule. The current ruling regarding required electric motor efficiency.
IPLV	Integrated part load value: a measure of the part load efficiency usually applied to chillers.
kBtu	One thousand British thermal units.
kW	Kilowatt: equal to 1,000 Watts.
kWh	Kilowatt-hour: 1,000 Watts of power expended over one hour.
LED	Light emitting diode: a high-efficiency source of light with a long lamp life.
LGEA	Local Government Energy Audit
Load	The total power a building or system is using at any given time.
Measure	A single activity, or installation of a single type of equipment, that is implemented in a building system to reduce total energy consumption.
МН	Metal halide: a type of HID lamp.
MBh	Thousand Btu per hour
MBtu	One thousand British thermal units
MMBtu	One million British thermal units
MV	Mercury Vapor: a type of HID lamp.
NJBPU	New Jersey Board of Public Utilities
NJCEP	New Jersey's Clean Energy Program: NJCEP is a statewide program that offers financial incentives, programs and services for New Jersey residents, business owners and local governments to help them save energy, money and the environment.
psig	Pounds per square inch gauge.
Plug Load	Refers to the amount of power used in a space by products that are powered by means of an ordinary AC plug.
PV	Photovoltaic: refers to an electronic device capable of converting incident light directly into electricity (direct current).





SEER	Seasonal energy efficiency ratio: a measure of efficiency in terms of annual cooling energy provided divided by total electric input.
SEP	Statement of energy performance: a summary document from the ENERGY STAR® Portfolio Manager®.
Simple Payback	The amount of time needed to recoup the funds expended in an investment or to reach the break-even point between investment and savings.
SREC	Solar renewable energy credit: a credit you can earn from the state for energy produced from a photovoltaic array.
T5, T8, T12	A reference to a linear lamp diameter. The number represents increments of $1/8^{\text{th}}$ of an inch.
Temperature Setpoint	The temperature at which a temperature regulating device (thermostat, for example) has been set.
therm	100,000 Btu. Typically used as a measure of natural gas consumption.
tons	A unit of cooling capacity equal to 12,000 Btu/hr.
Turnkey	Provision of a complete product or service that is ready for immediate use
VAV	Variable air volume
VFD	Variable frequency drive: a controller used to vary the speed of an electric motor.
WaterSense™	The symbol for water efficiency. The WaterSense™ program is managed by the EPA.
Watt (W)	Unit of power commonly used to measure electricity use.
_	







Local Government Energy Audit Report

Russell O. Brackman Middle School October 31, 2019

Prepared for:

Barnegat Township School District 600 Barnegat Boulevard North Barnegat, New Jersey 08005 Prepared by:

TRC

900 Route 9 North

Woodbridge, New Jersey 07095

Disclaimer

The goal of this audit report is to identify potential energy efficiency opportunities, help prioritize specific measures for implementation, and provide information about financial incentives that may be available. Most energy conservation measures have received preliminary analysis of feasibility that identifies expected ranges of savings and costs. This level of analysis is usually considered sufficient to establish a basis for further discussion and to help prioritize energy measures.

TRC Companies Inc. (TRC) reviewed the energy conservation measures and estimates of energy savings were reviewed for technical accuracy. Actual, achieved energy savings depend on behavioral factors and other uncontrollable variables and, therefore, estimates of final energy savings are not guaranteed. TRC and the New Jersey Board of Public Utilities (NJBPU) shall in no event be liable should the actual energy savings vary.

TRC bases estimated installation costs on our experience at similar facilities, pricing from local contractors and vendors, and/or cost estimates from RS Means. We encourage the owner of the facility to independently confirm these cost estimates and to obtain multiple estimates when considering measure installations. Actual installation costs can vary widely based on individual measures and conditions. TRC and NJBPU do not guarantee installed cost estimates and shall in no event be held liable should actual installed costs vary from estimates.

New Jersey's Clean Energy Program (NJCEP) incentive values provided in this report are estimates based on program information available at the time of the report. Incentive levels are not guaranteed. The NJBPU reserves the right to extend, modify, or terminate programs without prior notice. Please review all available program incentives and eligibility requirements prior to selecting and installing any energy conservation measures.

The customer and their respective contractor(s) are responsible to implement energy conservation measures in complete conformance with all applicable local, state and federal requirements.

Copyright © 2019 TRC Companies Inc. All rights reserved.

Reproduction or distribution of the whole, or any part of the contents of this document without written permission of TRC is prohibited. Neither TRC nor any of its employees makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any data, information, method, product or process disclosed in this document, or represents that its use will not infringe upon any privately-owned rights, including but not limited to, patents, trademarks or copyrights.





Table of Contents

1	Execu	Executive Summary				
	1.1	Planning Your Project	2			
	Pick	Your Installation Approach	2			
		e Options from Around the State				
2	Existir	ng Conditions				
	2.1	Site Overview	-			
	2.1	Building Occupancy				
	2.3	Building Envelope				
	2.4	Lighting Systems				
	2.5	Air Handling Systems				
	Llnit	: Ventilators	10			
		kaged Units				
		Conditioners				
		t pump units				
	2.6	Heating Hot Water Systems	11			
	2.7	Building Energy Management Systems (EMS)				
	2.8	Domestic Hot Water				
	2.9	Food Service and Refrigeration Equipment				
	2.10	Plug Load & Vending Machines				
	2.11	Water-Using Systems	15			
	2.12	On-Site Generation	15			
3	Energ	y Use and Costs	16			
	3.1	Electricity	18			
	3.2	Natural Gas				
	3.3	Benchmarking	20			
	Trac	king Your Energy Performance	21			
4		y Conservation Measures				
	4.1	Lighting	25			
	FCM	1 1: Install LED Fixtures	20			
		1 2: Retrofit Fixtures with LED Lamps				
	4.2	Lighting Controls				
	ECM	1 3: Install Occupancy Sensor Lighting Controls				
		1 4: Install High/Low Lighting Controls				
	4.3	Variable Frequency Drives (VFD)				
	ECN	15: Install VFDs on Constant Volume (CV) Fans				
		1 6: Install VFDs on Heating Water Pumps				
	4.4	Electric Unitary HVAC				
		1 7: Install High-Efficiency Air Conditioning Units				
	ECIV	T /. IIISTAII TIKII-ETIICIETICV AIT COTTUILIOTIITIK OTIILS	28			






	ECM 8: Install High-Efficiency Heat Pumps	28						
	4.5 Gas-Fired Heating	29						
	ECM 9: Install High-Efficiency Furnaces	29						
	4.6 Domestic Water Heating	29						
	ECM 10: Install High-Efficiency Gas-Fired Water Heater ECM 11: Install Low-Flow DHW Devices							
	4.7 Food Service & Refrigeration Measures	30						
	ECM 12: Refrigerator/Freezer Case Electrically Commutated Me ECM 13: Refrigeration Controls	30						
5	5 Energy Efficient Best Practices	31						
	Energy Tracking with ENERGY STAR® Portfolio Manager®	31 31 31 31 31 32 32 32 32 33 33						
6	6 On-site Generation	34						
	6.1 Solar Photovoltaic							
7	7 Project Funding and Incentives	37						
	 7.1 SmartStart 7.2 Direct Install 7.3 Pay for Performance - Existing Buildings 7.4 Combined Heat and Power 7.5 Energy Savings Improvement Program 7.6 SREC Registration Program 							
8	8 Energy Purchasing and Procurement Strategies	44						
	8.1 Retail Electric Supply Options							
	Appendix A: Equipment Inventory & Recommendations							
_	ppendix B: ENERGY STAR® Statement of Energy Performance							





1 EXECUTIVE SUMMARY

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) report for Russell O. Brackman Middle School. This report provides you with information about the Middle School's energy use, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help make changes in the Middle School. TRC conducted this study as part of a comprehensive effort to assist New Jersey school districts and local governments in controlling their energy costs and to help protect our environment by reducing statewide energy consumption.

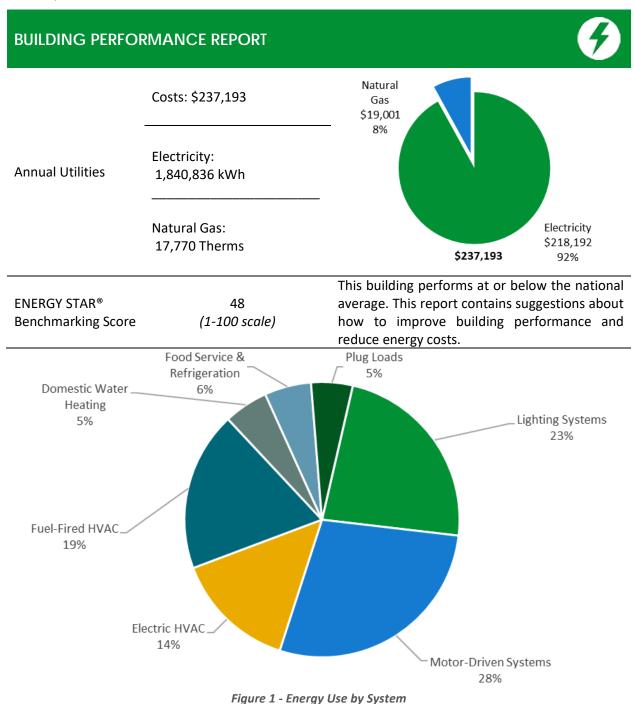






POTENTIAL IMPROVEMENTS



This energy audit considered a range of potential energy improvements in your building. Costs and savings will vary between improvements. Presented below are two potential scopes of work for your consideration.


Scenario 1: Full Package (all evaluated measures)

Installation Cost		\$640,924	
Potential Rebates & Incentiv	Potential Rebates & Incentives ¹		
Annual Cost Savings		\$80,815	
Annual Energy Savings	•	y: 676,531 kWh as: 586 Therms	
Greenhouse Gas Emission Sa	344 Tons		
Simple Payback	7.4 Years		
Site Energy Savings (all utilit	29%		



Scenario 2: Cost Effective Package²

Installation Cost	\$285,673
Potential Rebates & Incentive	es \$34,951
Annual Cost Savings	\$77,095
Annual Energy Savings	Electricity: 654,111 kWh
Greenhouse Gas Emission Sa	vings 327 Tons
Simple Payback	3.3 Years
Site Energy Savings (all utilities	es) 27%



On-site Generation Potential

Photovoltaic	Medium
Combined Heat and Power	None

¹ Incentives are based on current SmartStart Prescriptive incentives. Other program incentives may apply.

² A cost-effective measure is defined as one where the simple payback does not exceed two-thirds of the expected proposed equipment useful life. Simple payback is based on the net measure cost after potential incentives.





#	Energy Conservation Measure	Cost Effective?	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades		326,813	61.7	-66	\$38,036	\$115,119	\$23,552	\$91,567	2.4	321,425
ECM 1	Install LED Fixtures	Yes	12,525	1.4	0	\$1,485	\$41,537	\$4,300	\$37,237	25.1	12,612
ECM 2	Retrofit Fixtures with LED Lamps	Yes	314,288	60.3	-66	\$36,552	\$73,583	\$19,252	\$54,331	1.5	308,813
Lighting	Control Measures		63,323	10.9	-13	\$7,364	\$44,240	\$4,755	\$39,485	5.4	62,215
ECM 3	Install Occupancy Sensor Lighting Controls	Yes	56,068	9.6	-12	\$6,520	\$38,274	\$4,755	\$33,519	5.1	55,088
ECM 4	Install High/Low Lighting Controls	Yes	7,254	1.2	-2	\$844	\$5,966	\$0	\$5,966	7.1	7,127
Variable	Frequency Drive (VFD) Measures		233,009	54.1	0	\$27,618	\$101,042	\$5,280	\$95,762	3.5	234,638
ECM 5	Install VFDs on Constant Volume (CV) Fans	Yes	56,325	19.0	0	\$6,676	\$54,247	\$5,280	\$48,967	7.3	56,719
ECM 6	Install VFDs on Heating Water Pumps	Yes	176,684	35.1	0	\$20,942	\$46,795	\$0	\$46,795	2.2	177,920
Electric	Unitary HVAC Measures		44,469	20.3	0	\$5,271	\$297,942	\$6,425	\$291,517	55.3	44,780
ECM 7	Install High Efficiency Air Conditioning Units	No	22,420	12.1	0	\$2,657	\$275,162	\$5,311	\$269,851	101.5	22,577
ECM 8	Install High Efficiency Heat Pumps	Yes	22,049	8.2	0	\$2,613	\$22,780	\$1,114	\$21,666	8.3	22,203
Gas Hea	ting (HVAC/Process) Replacement		0	0.0	92	\$979	\$37,996	\$2,400	\$35,596	36.4	10,717
ECM 9	Install High Efficiency Furnaces	No	0	0.0	92	\$979	\$37,996	\$2,400	\$35,596	36.4	10,717
Domest	ic Water Heating Upgrade		0	0.0	46	\$490	\$42,236	\$1,470	\$40,766	83.2	5,366
ECM 10	Install High Efficiency Gas-Fired Water Heater	No	0	0.0	8	\$84	\$42,092	\$1,470	\$40,622	482.4	922
ECM 11	Install Low-Flow DHW Devices	Yes	0	0.0	38	\$406	\$143	\$0	\$143	0.4	4,444
Food Service & Refrigeration Measures			8,918	0.8	0	\$1,057	\$2,349	\$250	\$2,099	2.0	8,980
ECM 12	Refrigerator/Freezer Case Electrically Commutated Motors	Yes	1,237	0.1	0	\$147	\$910	\$0	\$910	6.2	1,245
	Refrigeration Controls	Yes	1,234	0.0	0	\$146	\$519	\$50	\$469	3.2	1,242
ECM 14 Vending Machine Control Yes			6,447	0.7	0	\$764	\$920	\$200	\$720	0.9	6,492
TOTALS (COST EFFECTIVE MEASURES)			654,111	135.7	-41	\$77,095	\$285,673	\$34,951	\$250,722	3.3	653,906
	TOTALS (ALL MEASURES)		676,531	147.8	59	\$80,815	\$640,924	\$44,132	\$596,792	7.4	688,122

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

Figure 2 – Evaluated Energy Improvements

For more detail on each evaluated energy improvement and a break out of cost-effective improvements, see **Section 4: Energy Conservation Measures**.

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





1.1 Planning Your Project

Careful planning makes for a successful energy project. When considering this scope of work, you will have some decisions to make, such as:

- ♦ How will the project be funded and/or financed?
- Is it best to pursue individual ECMs, groups of ECMs, or use a comprehensive approach where all ECMs are installed together?
- Are there other facility improvements that should happen at the same time?

Pick Your Installation Approach

New Jersey's Clean Energy Programs give you the flexibility to do a little or a lot. Rebates, incentives, and financing are available to help reduce both your installation costs and your energy bills. If you are planning to take advantage of these programs, make sure to review incentive program guidelines before proceeding. This is important because in most cases you will need to submit applications for the incentives before purchasing materials or starting installation.

The potential ECMs identified for this building likely qualify for multiple incentive and funding programs. Based on current program rules and requirements, your measures are likely to qualify for the following programs:

	Energy Conservation Measure	SmartStart	Direct Install	Pay For Performance
ECM 1	Install LED Fixtures	Х		Х
ECM 2	Retrofit Fixtures with LED Lamps	X		Х
ECM 3	Install Occupancy Sensor Lighting Controls	X		Х
ECM 4	Install High/Low Lighting Controls			Х
ECM 5	Install VFDs on Constant Volume (CV) HVAC	X		Х
ECM 6	Install VFDs on Hot Water Pumps			Х
ECM 7	Install High Efficiency Electric AC	X		Х
ECM 8	Install High Efficiency Heat Pumps	X		Х
ECM 9	Install High Efficiency Furnaces	X		Х
ECM 10	Install High Efficiency Gas Water Heater	X		Х
ECM 11	Install Low-Flow Domestic Hot Water Devices			Х
ECM 12	Refrigerator/Freezer Case Electrically Commutated Motors			Х
ECM 13	Refrigeration Controls	X		Х
ECM 14	Vending Machine Control	Х		Х

Figure 3 – Funding Options







New Jersey's Clean Energy Programs At-A-Glance

	SmartStart Flexibility to install at your own pace	Direct Install Turnkey installation	Pay for Performance Whole building upgrades
Who should use it?	Buildings installing individual measures or small group of measures.	Small to mid-size facilities that can bundle multiple measures together. Average peak demand should be below 200 kW. Not suitable for significant building shell issues.	Mid to large size facilities looking to implement as many measures as possible at one time. Peak demand should be over 200 kW.
How does it work?	Use in-house staff or your preferred contractor.	Pre-approved contractors pass savings along to you via reduced material and labor costs.	Whole-building approach to energy upgrades designed to reduce energy use by at least 15%. The more you save, the higher the incentives.
What are the Incentives?	Fixed incentives for specific energy efficiency measures.	Incentives pay up to 70% of eligible costs, up to \$125,000 per project. You pay the remaining 30% directly to the contractor.	Up to 25% of installation cost, calculated based on level of energy savings per square foot.
How do I participate?	Submit an application for the specific equipment to be installed.	Contact a participating contractor in your region.	Contact a pre-qualified Partner to develop your Energy Reduction Plan and set your energy savings targets.

Take the next step by visiting **www.njcleanenergy.com** for program details, applications, and to contact a qualified contractor.





Individual Measures with SmartStart

For facilities wishing to pursue only selected individual measures (or planning to phase implementation of selected measures over multiple years), incentives are available through the SmartStart program. To participate, you can use internal resources or an outside firm or contractor to perform the final design of the ECM(s) and install the equipment. Program pre-approval is required for some SmartStart incentives, so only after receiving pre-approval should you proceed with ECM installation.

Turnkey Installation with Direct Install

The Direct Install program provides turnkey installation of multiple measures through an authorized network of participating contractors. This program can provide substantially higher incentives than SmartStart, up to 70% of the cost of selected measures. Direct Install contractors will assess and verify individual measure eligibility, and, in most cases, they perform the installation work. The Direct Install program is available to sites with an average peak demand of less than 200 kW.

Whole Building Approach with Pay for Performance

Pay for Performance can be a good option for medium to large sized facilities to achieve deep energy savings. Pay for Performance allows you to install as many measures as possible under a single project as well as address measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program (ESIP) loan also use this program. Pay for Performance works for larger customers with a peak demand over 200 kW. The minimum installed scope of work must include at least two unique measures resulting in at least 15% energy savings, where lighting cannot make up the majority of the savings.

More Options from Around the State

Financing and Planning Support with the Energy Savings Improvement Program (ESIP)

For larger facilities with limited capital availability to implement ECMs, project financing may be available through the ESIP. Supported directly by the NJBPU, ESIP provides government agencies with project development, design, and implementation support services, as well as, attractive financing for implementing ECMs. You have already taken the first step as an LGEA customer, because this report is required to participate in ESIP.

Resiliency with Return on Investment through Combined Heat & Power (CHP)

The CHP program provides incentives for combined heat and power (aka cogeneration) and waste heat to power projects. Combined heat and power systems generate power on-site and recover heat from the generation system to meet on-site thermal loads. Waste heat to power systems use waste heat to generate power. You will work with a qualified developer who will design a system that meets your building's heating and cooling needs.

Ongoing Electric Savings with Demand Response

The Demand Response Energy Aggregator program reduces electric loads at commercial facilities when wholesale electricity prices are high or when the reliability of the electric grid is threatened due to peak power demand. By enabling commercial facilities to reduce electric demand during times of peak demand, the grid is made more reliable and overall transmission costs are reduced for all ratepayers. Curtailment service providers provide regular payments to medium and large consumers of electric power for their participation in demand response (DR) programs. Program participation is voluntary, and facilities receive payments regardless of whether they are called upon to curtail their load during times of peak demand.





2 EXISTING CONDITIONS

The New Jersey Board of Public Utilities (NJBPU) has sponsored this Local Government Energy Audit (LGEA) Report for Russell O. Brackman Middle School. This report provides information on how the Middle School uses energy, identifies energy conservation measures (ECMs) that can reduce your energy use, and provides information and assistance to help you implement the ECMs. This report also contains valuable information on financial incentives from New Jersey's Clean Energy Program (NJCEP) for implementing ECMs.

TRC conducted this study as part of a comprehensive effort to assist New Jersey educational and local government facilities in controlling energy costs and protecting our environment by offering a wide range of energy management options and advice.

For a detailed list of the locations and recommended energy conservation measures for all inventoried equipment, see **Appendix A: Equipment Inventory & Recommendations.**

2.1 Site Overview

On July 16, 2019, TRC performed an energy audit at Russell O. Brackman Middle School located in Barnegat, New Jersey. TRC met with Neil Piro to review the Middle School operations and help focus our investigation on specific energy-using systems.

Russell O. Brackman Middle School is a two-story, 172,970 square foot building built in 1990. Spaces include: classrooms, a gymnasium, an auditorium, offices, a cafeteria, corridors, stairwells, a commercial kitchen, and a mechanical space.

The Middle School has onsite PV generation on the roof. The building is a 100% heated and cooled.

2.2 Building Occupancy

The Middle School is occupied from September through June. Typical weekday occupancy is approximately 150 staff and 2,182 students.

Building Name	Weekday/Weekend	Operating Schedule
Russell O. Brackman	Weekday	7:00 AM - 4:00 PM
Middle School	VA/o also and	Saturday: 8:00 AM - 7:00 PM
ivildale School	Weekend	Sunday: 8:00 AM - 9:00 PM (Dec - Feb)

Figure 4 - Building Occupancy Schedule





2.3 Building Envelope

Building walls are concrete block over structural steel with a concrete block facade. The dividing walls are made of concrete masonry units. The roof is mainly flat, covered with black membrane, and in good condition. Some pitched portions of the roof are made of metal cladding panels.

Most of the windows are double-glazed and have aluminum frames with a thermal break. The glass-to-frame seals are in good condition. Exterior doors have metal reinforced plastic doors and are in good condition.



Facade



Windows



Rubber Roof



Exterior Door





2.4 Lighting Systems

The primary interior lighting system uses 32-Watt linear fluorescent T8 lamps. Additionally, there are some 26-watt compact fluorescent lamps (CFL). Typically, T8 fluorescent lamps use electronic ballasts.

Fixture types include 2-, 3-, or 4-lamp, 2- or 4-foot long troffers and surface-mounted fixtures and 2-foot fixtures with linear tube lamps. Most fixtures are controlled using wall switches. The gym is lit using T5 high output 4-foot 4-lamp fixtures that are controlled using remote-mounted occupancy sensors, and the auxiliary gym contains LED fixtures. Dimmable halogen-incandescent fixtures are used in the auditorium. Most fixtures are in good condition.

All exit signs are LED units. Interior lighting levels were generally sufficient.

The exterior fixtures consist of 26-watt 4 pin CFL fixtures, 70-watt high pressure sodium wall pack fixtures, and some pole-mounted exterior fixtures. The exterior fixtures are controlled using photocells or timeclocks.



Hallway 4-foot T8 Troffers



Wall-mounted LED Fixture



Pole-mounted LED Fixture



Gym Lighting T5 Fixture





2.5 Air Handling Systems

Unit Ventilators

There are 42-unit ventilators that provide heating and ventilation through supply fan motors with outside air dampers, as well as fan coil valves that operate with a pneumatic control system. This system is original to the building and appears to be in fair operating condition.

Packaged Units

There are six rooftop AAON packaged units serving the classrooms, gym, lobby, and Home Ec. rooms. The units have cooling capacities that range from 10 to 40 tons, with an average EER between 9 and 10. Each of these units have a gas-fired furnace with heating capacity ranging from 146 to 437 MBh. All of the units were installed in 2006 and have been evaluated for replacement. Space temperatures are controlled using an EMS.

Air Conditioners

Various spaces are cooled by 1-ton split AC units. The units have an average EER 10.8. Most of the units are beyond their useful life and have been evaluated for replacement.

Heat pump units

The building is mainly conditioned by distributed water source heat pumps with cooling capacities ranging from 1.5 to 5 tons, and heating capacities ranging from 10 to 120 MBh. Ground water is distributed to the heat pumps by two constant speed 75 hp circulation pumps. The boiler provides supplemental hot water to the loop when needed. The heat pump units have supply fans and EER ratings that range from 10.5 to 14. Zone space temperatures and loop temperatures are controlled by the EMS. The cooling setpoint at the facility is between 68°F to 71°F. A few of these units were replaced in 2019. Others have been evaluated for replacements.



Split AC Unit



Split AC Unit



Heat Pump Unit



Packaged Unit





2.6 Heating Hot Water Systems

Two condensing Laars hot water boilers with a 1020 MBH output capacity and an 85% efficiency provide hot water for the heat pump loop.

Ground water is circulated to the boilers where it is heated as required, and then distributed using one constant speed 7.5 hp pump and four 5 hp pumps to heat pumps located in the respective zones. The boilers also provide heating hot water to several convectors, air handlers, and unit heaters.

Space and loop temperatures are controlled using an EMS. Heating setpoints in the facility is between 71 to 74°F.



Condensing Boilers



Air Handling Unit



Water-Source Heat Pump Circulation pump



Unit Ventilators






2.7 Building Energy Management Systems (EMS)


An Automated Building EMS controls the HVAC equipment, boilers, heat pump units, air handlers, and package units. The EMS provides equipment scheduling control and monitors and controls space temperatures, supply air temperatures, and heating water loop temperatures.



Middle School Layout and Loops



Scheduling



Geothermal Loop Pumps



RTU-1 VAV System





2.8 Domestic Hot Water

One gas-fired and two electric water heaters serve the Middle School's domestic hot water needs. The AO Smith gas-fired unit has an input capacity of 420 MBh and a tank capacity of 200 gallons. It is approximately 75% efficient. The unit was installed in 1989 and has been evaluated for replacement. The AO Smith electric units both have an input capacity of 12kW and a tank capacity of 50 gallons.

Hot water is distributed to the end uses using fractional horse power circulating pumps.



Electric DHW



Natural Gas DHW





2.9 Food Service and Refrigeration Equipment

The kitchen has a mix of gas and electric equipment including gas convection oven, steamer, and a griddle that are used to prepare meals for students. Most cooking is done using a convection gas-fired oven. Bulk prepared foods are held in several electric holding cabinets. Equipment is high-efficiency and in good condition.

The kitchen has several stand-up solid door refrigerators. There are also refrigerator and freezer chests. All equipment is standard efficiency and appears to be in good condition.

The walk-in refrigerator has an estimated 1.5-ton compressor and a single-fan evaporator. The walk-in medium temperature freezer has an approximately 2-ton compressor and a two-fan evaporator.



Food Warmer



Convection Oven



Freezer Chest



Pretzel Warmer





2.10 Plug Load & Vending Machines

The utility bill analysis indicates that plug loads consume approximately 5% percent of total building energy use. This is lower than a typical building.

The location is doing a great job managing their electrical plug loads. This report makes additional suggestions for ECMs in this area, as well as Energy Efficient Best Practices.

There are approximately 303 computer work stations throughout the Middle School. Plug loads throughout the building include general café and office equipment. There are classroom typical loads such as Smart Boards, projectors, and fans. There are several residential-style refrigerators throughout the building that are used to store food for the staff. These vary in condition and efficiency.

There are four refrigerated beverage vending machines and one non-refrigerated vending machines. Vending machines are not equipped with occupancy-based controls.

2.11 Water-Using Systems

Faucet flow rates are at 1.5 gallons per minute (gpm) or higher. Toilets are rated at 1.6 gallons per flush (gpf) and urinals are rated at 1.0 gpf.

2.12 On-Site Generation

Russel O. Brackman Middle School has a photovoltaic (PV) array that was installed in 2011. This system provides approximately 29.1% of the electricity used at this facility.



PV Array



PV Array






3 ENERGY USE AND COSTS

Twelve months of utility billing data are used to develop annual energy consumption and cost data. This information creates a profile of the annual energy consumption and energy costs.

Utility Summary								
Fuel	Usage	Cost						
Electricity	1,840,836 kWh	\$218,192						
Natural Gas	17,770 Therms	\$19,001						
Total	\$237,193							



An energy balance identifies and quantifies energy use in your various building systems. This can highlight areas with the most potential for improvement. This energy balance was developed using calculated energy use for each of the end uses noted in the figure.

The energy auditor collects information regarding equipment operating hours, capacity, efficiency, and other operational parameters from facility staff, drawings, and on-site observations. This information is used as the inputs to calculate the existing conditions energy use for the site. The calculated energy use is then compared to the historical energy use and the initial inputs are revised, as necessary, to balance the calculated energy use to the historical energy use.





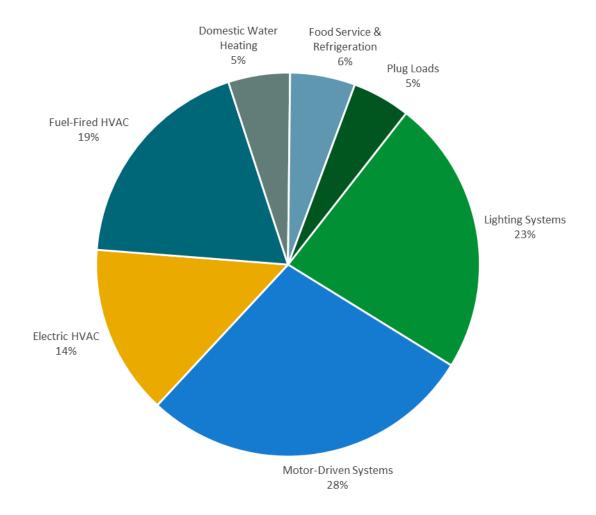



Figure 5 - Energy Balance





3.1 Electricity

JCP&L delivers electricity under rate class GSS, with electric production provided by South Jersey Energy/Tri Eagle Energy, a third-party supplier.

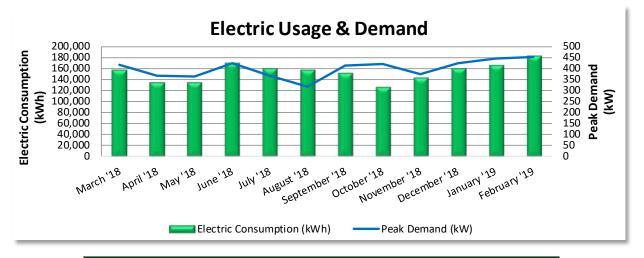

	Electric Billing Data								
Period Ending	Days in Period	Electric Usage (kWh)	Demand (kW)	Demand Cost	Total Electric Cost				
3/27/18	30	157,008	418	\$2,694	\$17,734				
4/25/18	29	135,020	366	\$2,250	\$16,325				
5/25/18	30	134,493	365	\$2,227	\$15,937				
6/26/18	32	170,854	423	\$2,780	\$20,007				
7/26/18	30	160,350	368	\$2,412	\$18,715				
8/27/18	32	157,500	318	\$2,074	\$18,002				
9/26/18	30	151,396	412	\$2,708	\$17,557				
10/25/18	29	125,655	421	\$2,479	\$16,344				
11/27/18	33	143,658	373	\$2,276	\$17,667				
12/27/18	30	160,416	424	\$2,597	\$20,803				
1/25/19	29	166,291	446	\$2,728	\$18,943				
2/26/19	32	183,238	452	\$2,774	\$20,756				
Totals	366	1,845,880	452	\$30,001	\$218,790				
Annual	365	1,840,836	452	\$29,919	\$218,192				

Notes:


- Peak demand of 452 kW occurred in February '19.
- The average electric cost over the past 12 months was \$0.119/kWh, which is the blended rate that includes energy supply, distribution, demand, and other charges. This report uses this blended rate to estimate energy cost savings.





3.2 Natural Gas

New Jersey Natural Gas delivers natural gas under rate class GSL, with natural gas supply provided by South Jersey Energy, a third-party supplier.

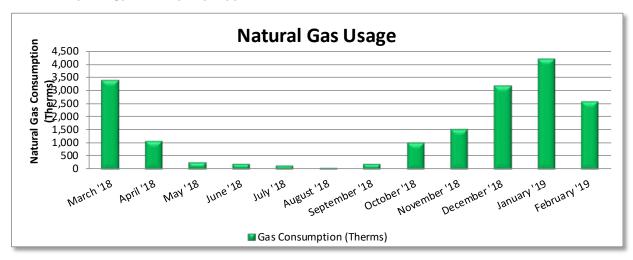

Gas Billing Data							
Period Days in Ending Period		Natural Gas Usage (Therms)	Natural Gas Cost				
4/4/18	30	3,389	\$2,955				
5/2/18	28	1,054	\$1,061				
6/1/18	30	270	\$497				
7/3/18	32	195	\$393				
8/2/18	30	123	\$338				
8/28/18	26	34	\$269				
10/1/18	34	201	\$448				
11/1/18	31	1,014	\$1,071				
12/1/18	30	1,503	\$1,447				
1/2/19	32	3,171	\$3,654				
2/4/19	33	4,188	\$4,250				
3/4/19	28	2,580	\$2,566				
Totals	364	17,721	\$18,949				
Annual	365	17,770	\$19,001				

Notes:

• The average gas cost for the past 12 months is \$1.069/therm, which is the blended rate used throughout the analysis.





3.3 Benchmarking

Your building was benchmarked using the United States Environmental Protection Agency's (EPA) *Portfolio Manager®* software. Benchmarking compares your building's energy use to that of similar buildings across the country, while neutralizing variations due to location, occupancy and operating hours. Some building types can be scored with a 1-100 ranking of a building's energy performance relative to the national building market. A score of 50 represents the national average and a score of 100 is best.

This ENERGY STAR® benchmarking score provides a comprehensive snapshot of your building's energy performance. It assesses the building's physical assets, operations, and occupant behavior, which is compiled into a quick and easy-to-understand score.

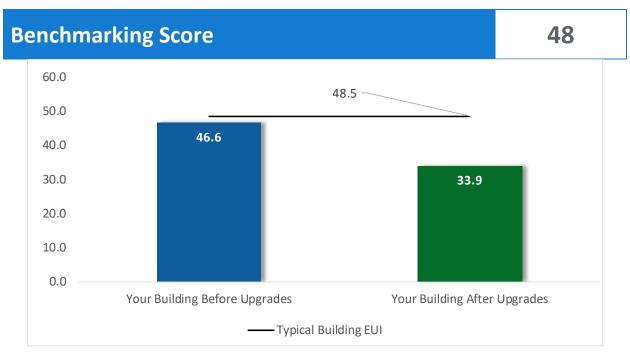


Figure 6 - Energy Use Intensity Comparison

This building performs at, or below the national average. This report contains suggestions about how to improve building performance and reduce energy costs.

Energy use intensity (EUI) measures energy consumption per square foot and is the standard metric for comparing buildings' energy performance. A lower EUI means better performance and less energy consumed. A number of factors can cause as building to vary from the "typical" energy usage. Local weather conditions, building age and insulation levels, equipment efficiency, daily occupancy hours, changes in occupancy throughout the year, equipment operating hours, and occupant behavior all contribute to a building's energy use and the benchmarking score.





Tracking Your Energy Performance

Keeping track of your energy use on a monthly basis is one of the best ways to keep energy costs in check. Update your utility information in Portfolio Manager® regularly, so that you can keep track of your building's performance.

We have created a Portfolio Manager® account for your facility and we have already entered the monthly utility data shown above for you. Account login information for your account will be sent via email.

Free online training is available to help you use ENERGY STAR® Portfolio Manager® to track your building's performance at: https://www.energystar.gov/buildings/training.

For more information on ENERGY STAR® and Portfolio Manager®, visit their website³.

LGEA Report - Barnegat Township School District Russell O. Brackman Middle School

³ https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/earn-recognition/energy-star-certification/how-app-1.





4 ENERGY CONSERVATION MEASURES

The goal of this audit report is to identify and evaluate potential energy efficiency improvements, provide information about the cost effectiveness of those improvements, and recognize potential financial incentives from NJBPU. Most energy conservation measures have received preliminary analysis of feasibility which identifies expected ranges of savings and costs. This level of analysis is typically sufficient to demonstrate project cost-effectiveness and help prioritize energy measures.

Calculations of energy use and savings are based on the current version of the *New Jersey's Clean Energy Program Protocols to Measure Resource Savings*, which is approved by the NJBPU. Further analysis or investigation may be required to calculate more precise savings based on specific circumstances.

Operation and maintenance costs for the proposed new equipment will generally be lower than the current costs for the existing equipment—especially if the existing equipment is at or past its normal useful life. We have conservatively assumed there to be no impact on overall maintenance costs over the life of the equipment.

Financial incentives are based on the current NJCEP prescriptive SmartStart program. A higher level of investigation may be necessary to support any SmartStart Custom, Pay for Performance, or Direct Install incentive applications. Some measures and proposed upgrades may be eligible for higher incentives than those shown below through other NJCEP programs described in a following section of this report.





#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)	Simple Payback Period (yrs)**	CO ₂ e Emissions Reduction (lbs)
Lighting	Upgrades	326,813	61.7	-66	\$38,036	\$115,119	\$23,552	\$91,567	2.4	321,425
ECM 1	Install LED Fixtures	12,525	1.4	0	\$1,485	\$41,537	\$4,300	\$37,237	25.1	12,612
ECM 2	Retrofit Fixtures with LED Lamps	314,288	60.3	-66	\$36,552	\$73,583	\$19,252	\$54,331	1.5	308,813
Lighting	Control Measures	63,323	10.9	-13	\$7,364	\$44,240	\$4,755	\$39,485	5.4	62,215
ECM 3	Install Occupancy Sensor Lighting Controls	56,068	9.6	-12	\$6,520	\$38,274	\$4,755	\$33,519	5.1	55,088
ECM 4	Install High/Low Lighting Controls	7,254	1.2	-2	\$844	\$5,966	\$0	\$5,966	7.1	7,127
Variable	Frequency Drive (VFD) Measures	233,009	54.1	0	\$27,618	\$101,042	\$5,280	\$95,762	3.5	234,638
ECM 5	Install VFDs on Constant Volume (CV) Fans	56,325	19.0	0	\$6,676	\$54,247	\$5,280	\$48,967	7.3	56,719
ECM 6	Install VFDs on Heating Water Pumps	176,684	35.1	0	\$20,942	\$46,795	\$0	\$46,795	2.2	177,920
Electric	Unitary HVAC Measures	44,469	20.3	0	\$5,271	\$297,942	\$6,425	\$291,517	55.3	44,780
ECM 7	Install High Efficiency Air Conditioning Units	22,420	12.1	0	\$2,657	\$275,162	\$5,311	\$269,851	101.5	22,577
ECM 8	Install High Efficiency Heat Pumps	22,049	8.2	0	\$2,613	\$22,780	\$1,114	\$21,666	8.3	22,203
Gas Hea	ting (HVAC/Process) Replacement	0	0.0	92	\$979	\$37,996	\$2,400	\$35,596	36.4	10,717
ECM 9	Install High Efficiency Furnaces	0	0.0	92	\$979	\$37,996	\$2,400	\$35,596	36.4	10,717
Domest	ic Water Heating Upgrade	0	0.0	46	\$490	\$42,236	\$1,470	\$40,766	83.2	5,366
ECM 10	Install High Efficiency Gas-Fired Water Heater	0	0.0	8	\$84	\$42,092	\$1,470	\$40,622	482.4	922
ECM 11	Install Low-Flow DHW Devices	0	0.0	38	\$406	\$143	\$0	\$143	0.4	4,444
Food Se	rvice & Refrigeration Measures	8,918	0.8	0	\$1,057	\$2,349	\$250	\$2,099	2.0	8,980
ECM 12	Refrigerator/Freezer Case Electrically Commutated Motors	1,237	0.1	0	\$147	\$910	\$0	\$910	6.2	1,245
ECM 13	Refrigeration Controls	1,234	0.0	0	\$146	\$519	\$50	\$469	3.2	1,242
ECM 14	Vending Machine Control	6,447	0.7	0	\$764	\$920	\$200	\$720	0.9	6,492
	TOTALS	676,531	147.8	59	\$80,815	\$640,924	\$44,132	\$596,792	7.4	688,122

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

Figure 7 – All Evaluated ECMs

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO₂e Emissions Reduction (Ibs)
Lighting	Upgrades	326,813	61.7	-66	\$38,036	\$115,119	\$23,552	\$91,567	2.4	321,425
ECM 1	Install LED Fixtures	12,525	1.4	0	\$1,485	\$41,537	\$4,300	\$37,237	25.1	12,612
ECM 2	Retrofit Fixtures with LED Lamps	314,288	60.3	-66	\$36,552	\$73,583	\$19,252	\$54,331	1.5	308,813
Lighting	Control Measures	63,323	10.9	-13	\$7,364	\$44,240	\$4,755	\$39,485	5.4	62,215
ECM 3	Install Occupancy Sensor Lighting Controls	56,068	9.6	-12	\$6,520	\$38,274	\$4,755	\$33,519	5.1	55,088
ECM 4	Install High/Low Lighting Controls	7,254	1.2	-2	\$844	\$5,966	\$0	\$5,966	7.1	7,127
Variable	Frequency Drive (VFD) Measures	233,009	54.1	0	\$27,618	\$101,042	\$5,280	\$95,762	3.5	234,638
ECM 5	Install VFDs on Constant Volume (CV) Fans	56,325	19.0	0	\$6,676	\$54,247	\$5,280	\$48,967	7.3	56,719
ECM 6	Install VFDs on Heating Water Pumps	176,684	35.1	0	\$20,942	\$46,795	\$0	\$46,795	2.2	177,920
Electric	Unitary HVAC Measures	22,049	8.2	0	\$2,613	\$22,780	\$1,114	\$21,666	8.3	22,203
ECM 8	Install High Efficiency Heat Pumps	22,049	8.2	0	\$2,613	\$22,780	\$1,114	\$21,666	8.3	22,203
Domest	ic Water Heating Upgrade	0	0.0	38	\$406	\$143	\$0	\$143	0.4	4,444
ECM 11	Install Low-Flow DHW Devices	0	0.0	38	\$406	\$143	\$0	\$143	0.4	4,444
Food Se	rvice & Refrigeration Measures	8,918	0.8	0	\$1,057	\$2,349	\$250	\$2,099	2.0	8,980
ECM 12	Refrigerator/Freezer Case Electrically Commutated Motors	1,237	0.1	0	\$147	\$910	\$0	\$910	6.2	1,245
ECM 13	Refrigeration Controls	1,234	0.0	0	\$146	\$519	\$50	\$469	3.2	1,242
ECM 14	Vending Machine Control	6,447	0.7	0	\$764	\$920	\$200	\$720	0.9	6,492
	TOTALS	654,111	135.7	-41	\$77,095	\$285,673	\$34,951	\$250,722	3.3	653,906

^{* -} All incentives presented in this table are based on NJ SmartStart equipment incentives and assume proposed equipment meets minimum performance criteria for that program.

Figure 8 – Cost Effective ECMs

^{** -} Simple Payback Period is based on net measure costs (i.e. after incentives).





4.1 Lighting

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)				CO₂e Emissions Reduction (lbs)
Lighting	Upgrades	326,813	61.7	-66	\$38,036	\$115,119	\$23,552	\$91,567	2.4	321,425
ECM 1	Install LED Fixtures	12,525	1.4	0	\$1,485	\$41,537	\$4,300	\$37,237	25.1	12,612
ECM 2	Retrofit Fixtures with LED Lamps	314,288	60.3	-66	\$36,552	\$73,583	\$19,252	\$54,331	1.5	308,813

When considering lighting upgrades, we suggest using a comprehensive design approach that simultaneously upgrades lighting fixtures and controls to maximize energy savings and improve occupant lighting. Comprehensive design will also consider appropriate lighting levels for different space types to make sure that the right amount of light is delivered where needed. If conversion to LED light sources is proposed, we suggest converting all fixtures of a specific lighting type (e.g. linear fluorescent) to LED lamps to minimize the number of lamp types in use at the Middle School, which should help reduce future maintenance costs.

ECM 1: Install LED Fixtures

Replace existing fixtures containing HID lamps with new LED light fixtures. This measure saves energy by installing LEDs, which use less power than other technologies with a comparable light output.

In some cases, HID fixtures can be retrofit with screw-based LED lamps. Replacing an existing HID fixture with a new LED fixture will generally provide better overall lighting optics; however, replacing the HID lamp with a LED screw-in lamp is typically a less expensive retrofit. We recommend you work with your lighting contractor to determine which retrofit solution is best suited to your needs and will be compatible with the existing fixture(s).

Maintenance savings may also be achieved, as LED lamps last longer than other light sources and therefore do not need to be replaced as often.

Affected building areas: exterior fixtures.

ECM 2: Retrofit Fixtures with LED Lamps

Replace fluorescent, CFL, or halogen incandescent lamps with LED lamps. Many LED tubes are direct replacements for existing fluorescent tubes and can be installed while leaving the fluorescent fixture ballast in place. LED lamps can be used in existing fixtures as direct replacements for most other lighting technologies.

This measure saves energy by installing LEDs, which use less power than other lighting technologies while providing equivalent lighting output for the space. Maintenance savings may also be available, as longer-lasting LEDs lamps will not need to be replaced as often as the existing lamps.

Affected building areas: all areas with fluorescent fixtures with T8 tubes, CFL, and halogen incandescent lamps.





4.2 Lighting Controls

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)		Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (Ibs)
Lighting	Control Measures	63,323	10.9	-13	\$7,364	\$44,240	\$4,755	\$39,485	5.4	62,215
ECM 3	Install Occupancy Sensor Lighting Controls	56,068	9.6	-12	\$6,520	\$38,274	\$4,755	\$33,519	5.1	55,088
ECM 4	Install High/Low Lighting Controls	7,254	1.2	-2	\$844	\$5,966	\$0	\$5,966	7.1	7,127

Lighting controls reduce energy use by turning off or lowering lighting fixture power levels when not in use. A comprehensive approach to lighting design should upgrade the lighting fixtures and the controls together for maximum energy savings and improved lighting for occupants.

ECM 3: Install Occupancy Sensor Lighting Controls

Install occupancy sensors to control lighting fixtures in areas that are frequently unoccupied, even for short periods. For most spaces, we recommend that lighting controls use dual technology sensors, which reduce the possibility of lights turning off unexpectedly.

Occupancy sensors detect occupancy using ultrasonic and/or infrared sensors. When an occupant enters the space, the lighting fixtures switch to full lighting levels. Most occupancy sensor lighting controls allow users to manually turn fixtures on/off, as needed. Some controls can also provide dimming options.

Occupancy sensors can be mounted on the wall at existing switch locations, on the ceiling, or in remote locations. In general, wall switch replacement sensors are best suited to single occupant offices and other small rooms. Ceiling-mounted or remote-mounted sensors are used in large spaces, locations without local switching, and where wall switches are not in the line-of-sight of the main work area.

This measure provides energy savings by reducing the lighting operating hours.

Affected building areas: offices, conference rooms, classrooms, gymnasium, library, restrooms, and storage rooms.

ECM 4: Install High/Low Lighting Controls

Install occupancy sensors to provide dual level lighting control for lighting fixtures in spaces that are infrequently occupied but may require some level of continuous lighting for safety or security reasons.

Lighting fixtures with these controls operate at default low levels when the area is unoccupied to provide minimal lighting to meet security or safety requirements. Sensors detect occupancy using ultrasonic and/or infrared sensors. When an occupant enters the space, the lighting fixtures switch to full lighting levels. Fixtures automatically switch back to low levels after a predefined period of vacancy. In parking lots and parking garages with significant ambient lighting, this control can sometimes be combined with photocell controls to turn the lights off when there is sufficient daylight.

The control lowers the light level by dimming the fixture output. Therefore, the controlled fixtures need to have a dimmable ballast or driver. This will need to be taken into account when selecting retrofit lamps and bulbs for the areas proposed for high/low control.

This measure provides energy savings by reducing the light fixture power draw when reduced light output is appropriate.

Affected building areas: hallways.





4.3 Variable Frequency Drives (VFD)

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)	100	CO₂e Emissions Reduction (lbs)
Variable	Frequency Drive (VFD) Measures	233,009	54.1	0	\$27,618	\$101,042	\$5,280	\$95,762	3.5	234,638
I ECM 5	Install VFDs on Constant Volume (CV) Fans	56,325	19.0	0	\$6,676	\$54,247	\$5,280	\$48,967	7.3	56,719
I ECM 6	Install VFDs on Heating Water Pumps	176,684	35.1	0	\$20,942	\$46,795	\$0	\$46,795	2.2	177,920

Variable frequency drives (VFDs) control motors for fans, pumps, and process equipment based on the actual output required of the driven equipment. Energy savings result from more efficient control of motor energy usage when equipment operates at partial load. The magnitude of energy savings depends on the estimated amount of time that the motor would operate at partial load. For equipment with proposed VFDs, we have included replacing the controlled motor with a new motor to conservatively account for the cost of an inverter duty rated motor.

Premium efficiency motors have been proposed to be installed only in conjunction with proposed VFD motor measures. Non-inverter duty rated motors will need to be replaced when the VFD measure is implemented.

ECM 5: Install VFDs on Constant Volume (CV) Fans

Install VFDs to control constant volume fan motor speeds. This converts a constant-volume, single-zone air handling system into a variable-air-volume (VAV) system. A separate VFD is usually required to control the return fan motor or dedicated exhaust fan motor, if the air handler has one.

Zone thermostats signal the VFD to adjust fan speed to maintain the appropriate temperature in the zone while maintaining a constant supply air temperature.

VAV system controls should not raise the supply air temperature at the expense of the fan power. A common mistake is to reset the supply air temperature to achieve chiller energy savings, which can lead to additional air flow requirements. Supply air temperature should be kept low (e.g. 55°F) until the minimum fan speed (typically about 50%) is met. At this point, it is efficient to raise the supply air temperature as the load decreases, but not such that additional air flow and thus fan energy is required.

For air handlers with direct expansion (DX) cooling systems, the minimum air flow across the cooling coil required to prevent the coil from freezing must be determined during the final project design. The control system programming should maintain the minimum air flow whenever the compressor is operating. Prior to implementation, verify minimum fan speed in cooling mode with the manufacturer. Note that savings will vary depending on the operating characteristics of each AHU.

Energy savings result from reducing the fan speed (and power) when conditions allow for reduced air flow.

Affected air handlers: AHU 1A-1B, AHU 2A-2B, AHU 1D, ERV-4, RTU-4, ERV-5B, HP-1 Cafeteria.





ECM 6: Install VFDs on Heating Water Pumps

Install VFDs to control heating water pumps. Two-way valves must serve the hot water coils, and the hot water loop must have a differential pressure sensor installed. If three-way valves or a bypass leg are used in the hot water distribution, they will need to be modified when this measure is implemented. As the hot water valves close, the differential pressure increases, and the VFD modulates the pump speed to maintain a differential pressure setpoint.

Energy savings result from reducing pump motor speed (and power) as hot water valves close. The magnitude of energy savings is based on the estimated amount of time that the system will operate at reduced load.

Affected pumps: 75 hp geothermal water pump.

4.4 Electric Unitary HVAC

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Electric	Unitary HVAC Measures	44,469	20.3	0	\$5,271	\$297,942	\$6,425	\$291,517	55.3	44,780
ECM 7	Install High Efficiency Air Conditioning Units	22,420	12.1	0	\$2,657	\$275,162	\$5,311	\$269,851	101.5	22,577
ECM 8	Install High Efficiency Heat Pumps	22,049	8.2	0	\$2,613	\$22,780	\$1,114	\$21,666	8.3	22,203

Replacing the unitary HVAC units has a long payback period and may not be justifiable based simply on energy considerations. However, most of the units at the Middle School are nearing or have reached the end of their normal useful life. Typically, the marginal cost of purchasing a high-efficiency unit can be justified by the marginal savings from the improved efficiency. When the split AC units, packaged units and water source heat pumps is eventually replaced, consider purchasing equipment that exceeds the minimum efficiency required by building codes.

ECM 7: Install High-Efficiency Air Conditioning Units

Replace standard efficiency packaged air conditioning units with high-efficiency packaged air conditioning units. The magnitude of energy savings for this measure depends on the relative efficiency of the older unit versus the new high-efficiency unit, average cooling load, and estimated annual operating hours.

ECM 8: Install High-Efficiency Heat Pumps

Replace standard efficiency heat pumps with high-efficiency heat pumps. A higher EER or SEER rating indicates a more efficient cooling system and a higher HSPF rating indicates more efficient heating mode. The magnitude of energy savings for this measure depends on the relative efficiency of the older unit versus the new high-efficiency unit, average heating and cooling loads, and estimated annual operating hours.





4.5 Gas-Fired Heating

#	Energy Conservation Measure		_	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)				CO₂e Emissions Reduction (lbs)
Gas Hea	ating (HVAC/Process) Replacement	0	0.0	92	\$979	\$37,996	\$2,400	\$35,596	36.4	10,717
ECM 9	Install High Efficiency Furnaces	0	0.0	92	\$979	\$37,996	\$2,400	\$35,596	36.4	10,717

ECM 9: Install High-Efficiency Furnaces

Replace standard efficiency furnaces with condensing furnaces. Improved combustion technology and heat exchanger design optimize heat recovery from the combustion gases, which can significantly improve furnace efficiency. Savings result from improved system efficiency.

4.6 Domestic Water Heating

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO ₂ e Emissions Reduction (lbs)
Domest	ic Water Heating Upgrade	0	0.0	46	\$490	\$42,236	\$1,470	\$40,766	83.2	5,366
LECM 10	Install High Efficiency Gas-Fired Water Heater	0	0.0	8	\$84	\$42,092	\$1,470	\$40,622	482.4	922
ECM 11	Install Low-Flow DHW Devices	0	0.0	38	\$406	\$143	\$0	\$143	0.4	4,444

ECM 10: Install High-Efficiency Gas-Fired Water Heater

Replace the existing tank water heater with a high-efficiency tank water heater. Energy savings result from the increased efficiency of the unit, which uses less gas to heat water, and fewer operating hours to maintain the tank water temperature.

ECM 11: Install Low-Flow DHW Devices

Install low-flow devices to reduce overall hot water demand. The following low-flow devices are recommended to reduce hot water usage:

Device	Flow Rate
Faucet aerators (lavatory)	0.5 gpm
Faucet aerator (kitchen)	1.5 gpm
Showerhead	2.0 gpm
Pre-rinse spray valve (kitchen)	1.28 gpm

Low-flow devices reduce the overall water flow from the fixture, while still providing adequate pressure for washing. Pre-rinse spray valves—often used in commercial and institutional kitchens—remove food waste from dishes prior to dishwashing.

Additional cost savings may result from reduced water usage.





4.7 Food Service & Refrigeration Measures

#	Energy Conservation Measure	Annual Electric Savings (kWh)	Peak Demand Savings (kW)	Annual Fuel Savings (MMBtu)	Annual Energy Cost Savings (\$)	Estimated Install Cost (\$)	Estimated Incentive (\$)*	Estimated Net Cost (\$)		CO₂e Emissions Reduction (lbs)
Food Se	Food Service & Refrigeration Measures		0.8	0	\$1,057	\$2,349	\$250	\$2,099	2.0	8,980
TECIVITY	Refrigerator/Freezer Case Electrically Commutated Motors	1,237	0.1	0	\$147	\$910	\$0	\$910	6.2	1,245
ECM 13	Refrigeration Controls	1,234	0.0	0	\$146	\$519	\$50	\$469	3.2	1,242
ECM 14	Vending Machine Control	6,447	0.7	0	\$764	\$920	\$200	\$720	0.9	6,492

ECM 12: Refrigerator/Freezer Case Electrically Commutated Motors

Replace shaded pole or permanent split capacitor (PSC) motors with electronically commutated (EC) motors in walk-in coolers and freezers. Fractional horsepower EC motors are significantly more efficient than mechanically commutated, brushed motors, particularly at low speeds or partial load. By using variable-speed technology, EC motors can optimize fan usage. Because these motors are brushless and use DC power, losses due to friction and phase shifting are eliminated.

Savings for this measure consider both the increased efficiency of the motor, as well as the reduction in refrigeration load due to motor heat loss.

ECM 13: Refrigeration Controls

Install additional controls to optimize the operation of walk-in coolers and freezers.

Many walk-in coolers and freezers have evaporator fans that run continuously. The measure adds a control system feature to automatically shut off evaporator fans when not needed.

Energy savings for each of the control measures account for reduction in compressor and fan operating hours, as well as reduction in the refrigeration heat load as appropriate.

ECM 14: Vending Machine Control

Vending machines operate continuously, even during unoccupied hours. Install occupancy sensor controls to reduce energy use. These controls power down vending machines when the vending machine area has been vacant for some time and power up the machines at necessary regular intervals or when the surrounding area is occupied. Energy savings are dependent on the vending machine and activity level in the area surrounding the machines.





5 ENERGY EFFICIENT BEST PRACTICES

A whole building maintenance plan will extend equipment life; improve occupant comfort, health, and safety; and reduce energy and maintenance costs. You may already be doing some of these things— see our list below for potential additions to your maintenance plan. Be sure to consult with qualified equipment specialists for details on proper maintenance and system operation.

Energy Tracking with ENERGY STAR® Portfolio Manager®



You've heard it before - you can't manage what you don't measure. ENERGY STAR® Portfolio Manager® is an online tool that you can use to measure and track energy and water consumption, as well as greenhouse gas emissions⁴. Your account has already been established. Now you can continue to keep tabs on your energy performance every month.

<u>Thermostat Schedules and Temperature Resets</u>



Use thermostat setback temperatures and schedules to reduce heating and cooling energy use during periods of low or no occupancy. Thermostats should be programmed for a setback of 5-10°F during low occupancy hours (reduce heating setpoints and increase cooling setpoints). Cooling load can be reduced by increasing the facility's occupied setpoint temperature. In general, during the cooling season, thermostats should be set as high as possible without sacrificing occupant comfort.

AC System Evaporator/Condenser Coil Cleaning

Dirty evaporator and condenser coils restrict air flow and restrict heat transfer. This increases the loads on the evaporator and condenser fan and decreases overall cooling system performance. Keeping the coils clean allows the fans and cooling system to operate more efficiently.

HVAC Filter Cleaning and Replacement

Air filters should be checked regularly (often monthly) and cleaned or replaced when appropriate. Air filters reduce indoor air pollution, increase occupant comfort, and help keep equipment operating efficiently. If the building has a building management system, consider installing a differential pressure switch across filters to send an alarm about premature fouling or overdue filter replacement. Over time, filters become less, and less effective as particulate buildup increases. Dirty filters also restrict air flow through the air conditioning or heat pump system, which increases the load on the distribution fans.

Boiler Maintenance

Many boiler problems develop slowly over time, so regular inspection and maintenance is essential to keeping the heating system running efficiently and preventing expensive repairs. Annual tune-ups should include a combustion analysis to analyze the exhaust from the boilers and to ensure the boiler is operating safely. Boilers should be cleaned according to the manufacturer's instructions to remove soot and scale from the water side or fire side of the boiler.

⁴ https://www.energystar.gov/buildings/facility-owners-and-managers/existing-buildings/use-portfolio-manager.





Furnace Maintenance

Preventative maintenance can extend the life of the system, maintain energy efficiency, and ensure safe operation. Following the manufacturer's instructions, a yearly tune-up should: check for gas / carbon monoxide leaks; change the air and fuel filters; check components for cracks, corrosion, dirt, or debris build-up; ensure the ignition system is working properly; test and adjust operation and safety controls; inspect electrical connections; and lubricate motors and bearings.

Water Heater Maintenance

Preventative maintenance can extend the life of the system, maintain energy efficiency, and ensure safe operation. At least once a year, follow manufacturer instructions to drain a few gallons out of the water heater using the drain valve. If there is a lot of sediment or debris, then a full flush is recommended. Turn the temperature down and then completely drain the tank. Annual checks should include checks for:

- Leaks or heavy corrosion on the pipes and valves.
- Corrosion or wear on the gas line and on the piping. If you noticed any black residue, soot, or charred metal, this is a sign you may be having combustion issues and you should have the unit serviced by a professional.
- For electric water heaters, look for signs of leaking such as rust streaks or residue around the upper and lower panels covering the electrical components on the tank.
- For water heaters more than three years old, have a technician inspect the sacrificial anode annually.

Plug Load Controls



Reducing plug loads is a common way to decrease your electrical use. Limiting the energy use of plug loads can include increasing occupant awareness, removing under-used equipment, installing hardware controls, and using software controls. Consider enabling the most aggressive power settings on existing devices or install load sensing or occupancy sensing (advanced) power strips⁵. Your local utility may offer incentives or rebates for this equipment.

⁵ For additional information refer to "Assessing and Reducing Plug and Process Loads in Office Buildings" http://www.nrel.gov/docs/fy13osti/54175.pdf, or "Plug Load Best Practices Guide" http://www.advancedbuildings.net/plug-load-best-practices-guide-offices.





Water Conservation



Installing dual flush or low-flow toilets and low-flow/waterless urinals are ways to reduce water use. The EPA WaterSense™ ratings for urinals is 0.5 gallons per flush (gpf) and for flush valve toilets is 1.28 gpf (this is lower than the current 1.6 gpf federal standard).

For more information regarding water conservation go to the EPA's WaterSense™ website⁶ or download a copy of EPA's "WaterSense™ at Work: Best Management

Practices for Commercial and Institutional Facilities"⁷ to get ideas for creating a water management plan and best practices for a wide range of water using systems.

Water conservation devices that do not reduce hot water consumption will not provide energy savings at the site level, but they may significantly affect your water and sewer usage costs. Any reduction in water use does however ultimately reduce grid-level electricity use since a significant amount of electricity is used to deliver water from reservoirs to end users.

If the facility has detached buildings with a master water meter for the entire campus, check for unnatural wet areas in the lawn or water seeping in the foundation at water pipe penetrations through the foundation. Periodically check overnight meter readings when the Middle School is unoccupied, and there is no other scheduled water usage.

Manage irrigation systems to use water more effectively outside the building. Adjust spray patterns so that water lands on intended lawns and plantings and not on pavement and walls. Consider installing an evapotranspiration irrigation controller that will prevent over-watering.

Procurement Strategies

Purchasing efficient products reduces energy costs without compromising quality. Consider modifying your procurement policies and language to require ENERGY STAR® or WaterSense™ products where available.

⁶ https://www.epa.gov/watersense

⁷ https://www.epa.gov/watersense/watersense-work-0





6 ON-SITE GENERATION

You don't have to look far in New Jersey to see one of the thousands of solar electric systems providing clean power to homes, businesses, schools, and government buildings. On-site generation includes both renewable (e.g., solar, wind) and non-renewable (e.g., fuel cells) technologies that generate power to meet all or a portion of the facility's electric energy needs. Also referred to as distributed generation, these systems contribute to greenhouse gas (GHG) emission reductions, demand reductions and reduced customer electricity purchases, which results in improved electric grid reliability through better use of transmission and distribution systems.

Preliminary screenings were performed to determine if an on-site generation measure could be a cost-effective solution for your facility. Before deciding to install an on-site generation system, we recommend conducting a feasibility study to analyze existing energy profiles, siting, interconnection, and the costs associated with the generation project including interconnection costs, departing load charges, and any additional special facilities charges.





6.1 Solar Photovoltaic

Photovoltaic (PV) panels convert sunlight into electricity. Individual panels are combined into an array that produces direct current (DC) electricity. The DC current is converted to alternating current (AC) through an inverter. The inverter is then connected to the building's electrical distribution system.

A preliminary screening based on the facility's electric demand, size and location of free area, and shading elements shows that the facility has **medium** potential for installing a PV array.

The amount of free area, ease of installation (location), and the lack of shading elements contribute to the medium potential. A PV array located in the parking lot be feasible. If you are interested in pursuing the installation of PV, we recommend conducting a full feasibility study.

The graphic below displays the results of the PV potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

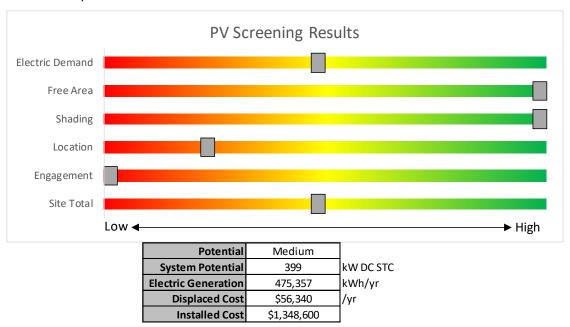


Figure 9 - Photovoltaic Screening

Solar Renewable Energy Certificate (SREC) Registration Program (SRP)

Rebates are not available for solar projects, but owners of solar projects MUST register their projects in the SREC Registration Program before starting construction. Once your PV system is up and running, you periodically earn credits, which can then be sold on the open market for up to 15 years.

If you are considering installing solar photovoltaics on your building, visit www.njcleanenergy.com/srec for more information about the SREC Registration Program.

Get more information about solar power in New Jersey or find a qualified solar installer who can help you decide if solar is right for your building:

- Basic Info on Solar PV in New Jersey: www.njcleanenergy.com/whysolar
- New Jersey Solar Market FAQs: www.njcleanenergy.com/renewable-energy/program-updates-and-background-information/solar-transition/solar-market-faqs
- Approved Solar Installers in the New Jersey Market: www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved_vendorsearch/?id=60&start=1





6.2 Combined Heat and Power

Combined heat and power (CHP) generate electricity at the Middle School and puts waste heat energy to good use. Common types of CHP systems are reciprocating engines, microturbines, fuel cells, backpressure steam turbines, and (at large facilities) gas turbines.

CHP systems typically produce a portion of the electric power used on-site, with the balance of electric power needs supplied by the local utility company. The heat is used to supplement (or replace) existing boilers and provide space heating and/or domestic hot water heating. Waste heat can also be routed through absorption chillers for space cooling.

The key criteria used for screening is the amount of time that the CHP system would operate at full load and the facility's ability to use the recovered heat. Facilities with a continuous need for large quantities of waste heat are the best candidates for CHP.

A preliminary screening based on heating and electrical demand, siting, and interconnection shows that the facility has **no** potential for installing a cost-effective CHP system.

Based on a preliminary analysis, the facility does not appear to meet the minimum requirements for a cost-effective CHP installation. Low or infrequent thermal load, and lack of space for siting the equipment are the most significant factors contributing to the lack of CHP potential.

The graphic below displays the results of the CHP potential screening conducted as a part of this audit. The position of each slider indicates the potential (potential increases to the right) that each factor contributes to the overall site potential.

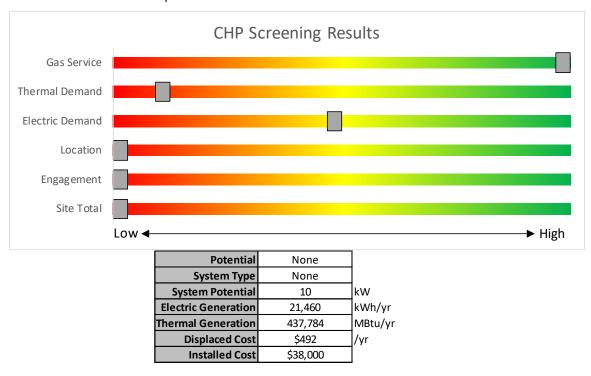


Figure 10 - Combined Heat and Power Screening

Find a qualified firm that specializes in commercial CHP cost assessment and installation: http://www.njcleanenergy.com/commercial-industrial/programs/nj-smartstart-buildings/tools-and-resources/tradeally/approved vendorsearch/.





7 Project Funding and Incentives

Ready to improve your building's performance? Pick the program that works best for you. Incentive programs that may apply to the Middle School are identified in the Executive Summary. This section provides an overview of currently available New Jersey's Clean Energy Programs.

	SmartStart Flexibility to install at your own pace	Direct Install Turnkey installation	Pay for Performance Whole building upgrades
Who should use it?	Buildings installing individual measures or small group of measures.	Small to mid-size facilities that can bundle multiple measures together.	Mid to large size facilities looking to implement as many measures as possible at one time.
		Average peak demand should be below 200 kW.	Peak demand should be over 200 kW.
		Not suitable for significant building shell issues.	
How does it work?	Use in-house staff or your preferred contractor.	Pre-approved contractors pass savings along to you via reduced material and labor costs.	Whole-building approach to energy upgrades designed to reduce energy use by at least 15%. The more you save, the higher the incentives.
What are the Incentives?	Fixed incentives for specific energy efficiency measures.	Incentives pay up to 70% of eligible costs, up to \$125,000 per project.	Up to 25% of installation cost, calculated based on level of energy savings per
		You pay the remaining 30% directly to the contractor.	square foot.
How do I participate?	Submit an application for the specific equipment to be installed.	Contact a participating contractor in your region.	Contact a pre-qualified Partner to develop your Energy Reduction Plan and set your energy savings targets.

Take the next step by visiting **www.njcleanenergy.com** for program details, applications, and to contact a qualified contractor.





7.1 SmartStart



SmartStart offers incentives for installing prescriptive and custom energy efficiency measures at your facility. This program provides an effective mechanism for securing incentives for energy efficiency measures installed individually or as part of a package of energy upgrades. This program serves most common equipment types and sizes.

SmartStart routinely adds, removes, or modifies incentives from year-to-year for various energy efficient equipment based on market trends and new technologies.

Equipment with Prescriptive Incentives Currently Available:

Electric Chillers
Electric Unitary HVAC
Gas Cooling
Gas Heating
Gas Water Heating
Ground Source Heat Pumps
Lighting

Lighting Controls
Refrigeration Doors
Refrigeration Controls
Refrigerator/Freezer Motors
Food Service Equipment
Variable Frequency Drives

Incentives

The SmartStart Prescriptive program provides fixed incentives for specific energy efficiency measures. Prescriptive incentives vary by equipment type.

SmartStart Custom provides incentives for more unique or specialized technologies or systems that are not addressed through prescriptive incentives. Custom incentives are calculated at \$0.16/kWh and \$1.60/therm based on estimated annual savings. Incentives are capped at 50% of the total installed incremental project cost, or a project cost buy down to a one-year payback (whichever is less). Program incentives are capped at \$500,000 per electric account and \$500,000 per natural gas account, per fiscal year.

How to Participate

Submit an application for the specific equipment to be installed. Many applications are designed as rebates, although others require application approval prior to installation. You can work with your preferred contractor or use internal staff to install measures.

Visit <u>www.njcleanenergy.com/SSB</u> for a detailed program description, instructions for applying, and applications.





7.2 Direct Install



Direct Install is a turnkey program available to existing small to medium-sized facilities with an average peak electric demand that does not exceed 200 kW over the recent 12-month period. You work directly with a preapproved contractor who will perform a free energy assessment at your facility, identify specific eligible measures, and provide a clear scope of work for

installation of selected measures. Energy efficiency measures may include lighting and lighting controls, refrigeration, HVAC, motors, variable speed drives, and controls.

Incentives

The program pays up to 70% of the total installed cost of eligible measures, up to \$125,000 per project. Each entity is limited to incentives up to \$250,000 per fiscal year.

How to Participate

To participate in Direct Install, you will need to contact the participating contractor assigned to the region of the state where your facility is located. A complete list of Direct Install program partners is provided on the Direct Install website linked below. The contractor will be paid the measure incentives directly by the program, which will pass on to you in the form of reduced material and implementation costs. This means up to 70% of eligible costs are covered by the program, subject to program caps and eligibility, while the remaining 30% of the cost is paid to the contractor by the customer.

Detailed program descriptions and applications can be found at: www.njcleanenergy.com/DI.





7.3 Pay for Performance - Existing Buildings



Pay for Performance works for larger customers with a peak demand over 200 kW. The minimum installed scope of work must include at least two unique measures that results in at least 15% source energy savings, and lighting cannot make up the majority of the savings. P4P is a generally a good option for medium-to-large sized facilities looking to implement as many

measures as possible under a single project to achieve deep energy savings. This program has an added benefit of addressing measures that may not qualify for other programs. Many facilities pursuing an Energy Savings Improvement Program loan also use this program.

Incentives

Incentives are based on estimated and achieved energy savings ranging from \$0.18-\$0.22/kWh and \$1.80-\$2.50/therm, capped at the lesser of 50% total project cost, or \$1 million per electric account and \$1 million per natural gas account, per fiscal year, not to exceed \$2 million per project. An incentive of \$0.15/square foot is also available to offset the cost of developing the Energy Reduction Plan (see below) contingent on the project moving forward with measure installation.

How to Participate

Contact one of the pre-approved consultants and contractors ("Partners"). Under direct contract to you, they will help further evaluate the measures identified in this report through development of the energy reduction plan, assist you in implementing selected measures, and verify actual savings one year after the installation. Your Partner will also help you apply for incentives.

Approval of the final scope of work is required by the program prior to installation. Installation can be done by the contractor of your choice (some P4P Partners are also contractors) or by internal staff, but the Partner remains involved throughout construction to ensure compliance with the program requirements.

Detailed program descriptions, instructions for applying, applications and list of Partners can be found at: www.njcleanenergy.com/P4P.





7.4 Combined Heat and Power

The Combined Heat & Power (CHP) program provides incentives for eligible CHP or waste heat to power (WHP) projects. Eligible CHP or WHP projects must achieve an annual system efficiency of at least 65% (lower heating value, or LHV), based on total energy input and total utilized energy output. Mechanical energy may be included in the efficiency evaluation.

Incentives

Eligible Technologies	Size (Installed Rated Capacity) ¹	Incentive (\$/kW)	% of Total Cost Cap per Project ³	\$ Cap per Project ³
Powered by non- renewable or renewable fuel source ⁴	≤500 kW	\$2,000	30-40%²	\$2 million
Gas Internal Combustion Engine	>500 kW - 1 MW	\$1,000		
Gas Combustion Turbine	> 1 MW - 3 MW	\$550		
Microturbine Fuel Cells with Heat Recovery	>3 MW	\$350	30%	\$3 million
Waste Heat to	<1 MW	\$1,000	30%	\$2 million
E OVIGE	> 1MW	\$500		\$3 million

[&]quot;Waste Heat to Power: Powered by non-renewable fuel source, heat recovery or other mechanical recovery from existing equipment utilizing new electric generation equipment (e.g. steam turbine).

Check the NJCEP website for details on program availability, current incentive levels, and requirements.

How to Participate

You work with a qualified developer or consulting firm to complete the CHP application. Once the application is approved the project can be installed. Information about the CHP program can be found at: www.njcleanenergy.com/CHP.





7.5 Energy Savings Improvement Program

The Energy Savings Improvement Program (ESIP) serves New Jersey's government agencies by financing energy projects. An ESIP is a type of performance contract, whereby school districts, counties, municipalities, housing authorities and other public and state entities enter in to contracts to help finance building energy upgrades. Annual payments are lower than the savings projected from the ECMs, ensuring that ESIP projects are cash flow positive for the life of the contract.

ESIP provides government agencies in New Jersey with a flexible tool to improve and reduce energy usage with minimal expenditure of new financial resources. NJCEP incentive programs described above can also be used to help further reduce the total project cost of eligible measures.

How to Participate

This LGEA report is the first step to participating in ESIP. Next, you will need to select an approach for implementing the desired ECMs:

- (1) Use an energy services company or "ESCO."
- (2) Use independent engineers and other specialists, or your own qualified staff, to provide and manage the requirements of the program through bonds or lease obligations.
- (3) Use a hybrid approach of the two options described above where the ESCO is used for some services and independent engineers, or other specialists or qualified staff, are used to deliver other requirements of the program.

After adopting a resolution with a chosen implementation approach, the development of the energy savings plan (ESP) can begin. The ESP demonstrates that the total project costs of the ECMs are offset by the energy savings over the financing term, not to exceed 15 years. The verified savings will then be used to pay for the financing.

The ESIP approach may not be appropriate for all energy conservation and energy efficiency improvements. Carefully consider all alternatives to develop an approach that best meets your needs. A detailed program descriptions and application can be found at: www.njcleanenergy.com/ESIP.

ESIP is a program delivered directly by the NJBPU and is not an NJCEP incentive program. As mentioned above, you can use NJCEP incentive programs to help further reduce costs when developing the energy savings plan. Refer to the ESIP guidelines at the link above for further information and guidance on next steps.





7.6 SREC Registration Program

The SREC (Solar Renewable Energy Certificate) Registration Program (SRP) is used to register the intent to install solar projects in New Jersey. Rebates are not available for solar projects, but owners of solar projects *must* register their projects prior to the start of construction to establish the project's eligibility to earn SRECs. Registration of the intent to participate in New Jersey's solar marketplace provides market participants with information about the pipeline of anticipated new solar capacity and insight into future SREC pricing.

After the registration is accepted, construction is complete, and final paperwork has been submitted and is deemed complete, the project is issued a New Jersey certification number, which enables it to generate New Jersey SRECs. SREC's are generated once the solar project has been authorized to be energized by the Electric Distribution Company (EDC).

Each time a solar installation generates 1,000 kilowatt-hours (kWh) of electricity, an SREC is earned. Solar project owners report the energy production to the SREC Tracking System. This reporting allows SREC's to be placed in the customer's electronic account. SRECs can then be sold on the SREC Tracking System, providing revenue for the first 15 years of the project's life.

Electricity suppliers, the primary purchasers of SRECs, are required to pay a Solar Alternative Compliance Payment (SACP) if they do not meet the requirements of New Jersey's Solar Renewable Portfolio Standard. Purchasing SRECs can help them meet those requirements. As SRECs are traded in a competitive market, the price may vary significantly. The actual price of an SREC during a trading period fluctuates depending on supply and demand.

Information about the SRP can be found at: www.njcleanenergy.com/srec.





8 ENERGY PURCHASING AND PROCUREMENT STRATEGIES

8.1 Retail Electric Supply Options

Energy deregulation in New Jersey has increased energy buyers' options by separating the function of electricity distribution from that of electricity supply. So, though you may choose a different company from which to buy your electric power, responsibility for your facility's interconnection to the grid and repair to local power distribution will still reside with the traditional utility company serving your region.

If your facility is not purchasing electricity from a third-party supplier, consider shopping for a reduced rate from third-party electric suppliers. If your facility already buys electricity from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party electric suppliers is available at the NJBPU website⁸.

8.2 Retail Natural Gas Supply Options

The natural gas market in New Jersey is also deregulated. Most customers that remain with the utility for natural gas service pay rates that are market-based and that fluctuate monthly. The utility provides basic gas supply service (BGSS) to customers who choose not to buy from a third-party supplier for natural gas commodity.

A customer's decision about whether to buy natural gas from a retail supplier typically depends on whether a customer prefers budget certainty and/or longer-term rate stability. Customers can secure longer-term fixed prices by signing up for service through a third-party retail natural gas supplier. Many larger natural gas customers may seek the assistance of a professional consultant to assist in their procurement process.

If your facility does not already purchase natural gas from a third-party supplier, consider shopping for a reduced rate from third-party natural gas suppliers. If your facility already purchases natural gas from a third-party supplier, review and compare prices at the end of each contract year.

A list of licensed third-party natural gas suppliers is available at the NJBPU website⁹.

⁸ www.state.nj.us/bpu/commercial/shopping.html

⁹ www.state.nj.us/bpu/commercial/shopping.html





APPENDIX A: EQUIPMENT INVENTORY & RECOMMENDATIONS

Lighting Inventory & Recommendations

Ligitung IIIV		ry & Recommenda	LIUIIS				Dron	acad Canditie							Enormula	nact 0 Ei	a a mai al . A m	olucio -			
	EXISTIN	g Conditions					Prop	osed Conditio	ns						Energy In	npact & Fi					Simple
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM#	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Payback w/ Incentives in Years
Cafeteria fan room	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,066	0	\$124	\$489	\$95	3.2
N220 Teachers lounge	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,066	0	\$124	\$489	\$95	3.2
N220 restroom	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	s	33	3,848	2	Relamp	No	1	LED - Linear Tubes: (2) 2' Lamps	Wall Switch	17	3,848	0.0	68	0	\$8	\$33	\$6	3.4
CR S234	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR S235	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
Storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	355	0	\$41	\$189	\$20	4.1
Girls 2nd floor	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$380	\$65	5.1
Girls 2nd floor	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	3,848	2, 3	Relamp	Yes	1	LED - Linear Tubes: (2) 2' Lamps	Occupancy Sensor	17	2,655	0.0	90	0	\$10	\$33	\$6	2.5
Boys 2nd floor	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$380	\$65	5.1
Boys 2nd floor	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	3,848	2, 3	Relamp	Yes	1	LED - Linear Tubes: (2) 2' Lamps	Occupancy Sensor	17	2,655	0.0	90	0	\$10	\$33	\$6	2.5
Electrical room	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	279	0	\$32	\$73	\$20	1.6
CR S232	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR S233	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR S231B	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	8	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,422	0	\$165	\$562	\$115	2.7
CR S230	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR S231A	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	8	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,422	0	\$165	\$562	\$115	2.7
CR S228	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR S229	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
S Hallway - 2nd floor	9	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 4	Relamp	Yes	9	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,655	0.3	1,600	0	\$186	\$554	\$90	2.5
S Hallway - 2nd floor	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
CR S226	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR S227	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
N209	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,066	0	\$124	\$489	\$95	3.2
N209 Hall	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 4	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,655	0.1	533	0	\$62	\$226	\$30	3.2
N209 Hall	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0





	Existin	g Conditions					Prop	osed Condition	าร						Energy In	npact & Fi	nancial An	alysis			
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM#	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	355	0	\$41	\$189	\$20	4.1
CR N210	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
Girls 2nd floor - N side	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$380	\$65	5.1
Girls 2nd floor - N side	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Boys 2nd floor - N side	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$380	\$65	5.1
Boys 2nd floor - N side	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	355	0	\$41	\$189	\$20	4.1
CR N212	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR N211	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR N214	16	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	16	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	2,844	-1	\$331	\$854	\$195	2.0
CR N213	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR N216	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR N215	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
N Hall 2nd floor	9	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 4	Relamp	Yes	9	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,655	0.3	1,600	0	\$186	\$554	\$90	2.5
N Hall 2nd floor	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
N218 Book room	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR N217	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR N219	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
Custodian	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$226	\$50	2.8
CR N221	18	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	18	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	3,199	-1	\$372	\$927	\$215	1.9
N221 closet	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	140	0	\$16	\$37	\$10	1.6
CR N222	20	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Switch	S	62	3,848	2, 3	Relamp	Yes	20	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.6	3,555	-1	\$413	\$1,270	\$270	2.4
N222 prep room	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	711	0	\$83	\$262	\$60	2.4
CR S223	18	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Switch	S	62	3,848	2, 3	Relamp	Yes	18	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	3,199	-1	\$372	\$927	\$215	1.9
S223 storage	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	1,240	2	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	1,240	0.0	68	0	\$8	\$55	\$15	5.1





	Existin	g Conditions					Prop	osed Conditio	ns						Energy In	npact & Fi	nancial An	alvsis			
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours		Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
CR S225	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
S224 Science lab	20	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	20	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.6	3,555	-1	\$413	\$1,270	\$270	2.4
S224 prep room	4	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	3,848	2, 3	Relamp	Yes	4	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.2	1,066	0	\$124	\$335	\$80	2.1
N Hall 2nd floor	22	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 4	Relamp	Yes	22	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,655	0.7	3,910	-1	\$455	\$1,478	\$220	2.8
N Hall 2nd floor	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Mechanical room	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	279	0	\$32	\$73	\$20	1.6
Center mechanical room	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	3	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.1	419	0	\$49	\$110	\$30	1.6
Electrical room	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	s	93	3,848	2	Relamp	No	2	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	3,848	0.1	419	0	\$49	\$110	\$30	1.6
Hall by west side	9	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 4	Relamp	Yes	9	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,655	0.3	1,600	0	\$186	\$554	\$90	2.5
Hall by west side	4	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	4	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
CR W 208	15	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	s	93	3,848	2, 3	Relamp	Yes	15	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.7	3,999	-1	\$465	\$1,092	\$260	1.8
CR W 206	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	15	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	2,666	-1	\$310	\$818	\$185	2.0
N 207 lab	18	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	18	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	3,199	-1	\$372	\$1,197	\$250	2.5
N 207 prep room	9	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	3,848	2, 3	Relamp	Yes	9	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.4	2,399	-1	\$279	\$763	\$170	2.1
N207 storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	1,240	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	856	0.1	115	0	\$13	\$189	\$20	12.7
W 205 lab	20	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	20	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.6	3,555	-1	\$413	\$1,270	\$270	2.4
W204	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	15	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	2,666	-1	\$310	\$818	\$185	2.0
W202 A	6	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	s	93	3,848	2, 3	Relamp	Yes	6	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.3	1,600	0	\$186	\$599	\$125	2.5
W202 B	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,066	0	\$124	\$489	\$95	3.2
W203 lab	21	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	21	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.6	3,732	-1	\$434	\$1,307	\$280	2.4
201/203 prep room	9	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	9	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.3	1,600	0	\$186	\$599	\$125	2.5
201/203 storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	1,240	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	856	0.1	115	0	\$13	\$189	\$20	12.7
N201 lab	18	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	s	93	3,848	2, 3	Relamp	Yes	18	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.8	4,799	-1	\$558	\$1,526	\$340	2.1
W200 teachers lounge	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,066	0	\$124	\$489	\$95	3.2
Girls 2nd floor W side	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	711	0	\$83	\$416	\$75	4.1





	Existin	g Conditions					Prop	osed Conditio	ns						Energy In	npact & Fi	nancial An	alysis			
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM#	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Girls 2nd floor W side	1	Compact Fluorescent: 4-pin 1 lamp	Wall Switch	s	26	3,848	2, 3	Relamp	Yes	1	LED Lamps: 4-pin 1 lamp	Occupancy Sensor	18	2,655	0.0	57	0	\$7	\$17	\$1	2.5
Boys 2nd floor W side	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	711	0	\$83	\$416	\$75	4.1
Boys 2nd floor W side	1	Compact Fluorescent: 4-pin 1 lamp	Wall Switch	s	26	3,848	2, 3	Relamp	Yes	1	LED Lamps: 4-pin 1 lamp	Occupancy Sensor	18	2,655	0.0	57	0	\$7	\$17	\$1	2.5
Custodian closet	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	1,240	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	1,240	0.0	45	0	\$5	\$37	\$10	5.1
Storage closet	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	1,240	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	856	0.1	115	0	\$13	\$189	\$20	12.7
W side 2nd floor hall	13	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 4	Relamp	Yes	13	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,655	0.4	2,311	0	\$269	\$925	\$130	3.0
W side 2nd floor hall	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Stairwell 1	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.1	838	0	\$97	\$219	\$60	1.6
Stairwell 1	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Maintenance boiler room	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.1	838	0	\$97	\$219	\$60	1.6
Maintenance boiler room	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Pump room	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.1	838	0	\$97	\$219	\$60	1.6
Electrical room	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	4	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.1	559	0	\$65	\$146	\$40	1.6
Custodian lounge	21	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	21	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.6	3,732	-1	\$434	\$1,307	\$280	2.4
Generator room	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	279	0	\$32	\$73	\$20	1.6
Main gym	24	Linear Fluorescent - T5: 4' T5 (28W) - 4L	Occupancy Sensor	s	120	2,655	2	Relamp	No	24	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	2,655	1.1	4,346	-1	\$505	\$1,753	\$480	2.5
Main gym	5	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	5	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Main gym	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,066	0	\$124	\$489	\$95	3.2
BLR Coach office	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	355	0	\$41	\$189	\$20	4.1
BLR Coach office restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	140	0	\$16	\$37	\$10	1.6
Boys locker room	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	15	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	2,666	-1	\$310	\$818	\$185	2.0
BLR storage	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	140	0	\$16	\$37	\$10	1.6
GLR Coach office	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	355	0	\$41	\$189	\$20	4.1
GLR restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	140	0	\$16	\$37	\$10	1.6
Girls locker room	18	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	18	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	3,199	-1	\$372	\$927	\$215	1.9





	Existin	g Conditions					Prop	osed Condition	าร						Energy In	npact & Fir	nancial An	alysis			
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM#	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Gym storage	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	7	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,244	0	\$145	\$372	\$70	2.1
Music storage	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	1,240	2, 3	Relamp	Yes	5	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	856	0.2	286	0	\$33	\$299	\$50	7.5
Auxillary gym	15	LED - Fixtures: High-Bay	Wall Switch	s	15	3,848		None	No	15	LED - Fixtures: High-Bay	Wall Switch	15	3,848	0.0	0	0	\$0	\$0	\$0	0.0
Auxillary gym	4	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	4	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Auxillary gym storage	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	1,240	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	1,240	0.0	45	0	\$5	\$37	\$10	5.1
Auxillary gym storage 2	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	1,240	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	856	0.1	172	0	\$20	\$226	\$30	9.8
Cafeteria	50	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	50	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	1.5	8,887	-2	\$1,033	\$3,176	\$675	2.4
Cafeteria	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	26	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	26	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.6	3,632	-1	\$422	\$949	\$260	1.6
Kitchen	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen storage	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	711	0	\$83	\$262	\$40	2.7
Kitchen office	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	140	0	\$16	\$37	\$10	1.6
Kitchen bathroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	140	0	\$16	\$37	\$10	1.6
Media center	54	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	54	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	1.6	9,598	-2	\$1,116	\$3,322	\$715	2.3
Media center	4	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	3,848	2	Relamp	No	4	LED - Linear Tubes: (2) 2' Lamps	Wall Switch	17	3,848	0.0	271	0	\$32	\$130	\$24	3.4
Media center	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
AV room	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2	Relamp	No	6	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.1	838	0	\$97	\$219	\$60	1.6
MC office	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$226	\$50	2.8
Elevator machine room	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	279	0	\$32	\$73	\$20	1.6
C127 Mail room	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	5	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	889	0	\$103	\$453	\$85	3.6
Boys 1st floor W side	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	711	0	\$83	\$416	\$75	4.1
Boys 1st floor W side	1	Compact Fluorescent: 4 pin - 1 lamp	Wall Switch	s	26	3,848	2, 3	Relamp	Yes	1	LED Lamps: 4-pin 1 lamp	Occupancy Sensor	18	2,655	0.0	57	0	\$7	\$17	\$1	2.5
Girls 1st floor W side	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	711	0	\$83	\$416	\$75	4.1
Girls 1st floor W side	1	Compact Fluorescent: 4 pin - 1 lamp	Wall Switch	s	26	3,848	2, 3	Relamp	Yes	1	LED Lamps: 4-pin 1 lamp	Occupancy Sensor	18	2,655	0.0	57	0	\$7	\$17	\$1	2.5
Custodial closet	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	140	0	\$16	\$37	\$10	1.6





	Existin	g Conditions					Prop	osed Condition	าร						Energy In	npact & Fir	nancial An	alysis			
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM#	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
CR W101	18	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	18	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	3,199	-1	\$372	\$927	\$215	1.9
W101 prep room	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,066	0	\$124	\$489	\$95	3.2
W101 storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	1,240	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	856	0.1	115	0	\$13	\$189	\$20	12.7
CR W103	21	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	21	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.6	3,732	-1	\$434	\$1,037	\$245	1.8
W100 closet	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	1,240	2, 3	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	856	0.1	229	0	\$27	\$262	\$40	8.3
W100 data room	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	355	0	\$41	\$189	\$20	4.1
CR W102	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	15	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	2,666	-1	\$310	\$818	\$185	2.0
CR W104	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	15	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	2,666	-1	\$310	\$818	\$185	2.0
CR W105	21	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	21	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.6	3,732	-1	\$434	\$1,037	\$245	1.8
W105 prep room	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,066	0	\$124	\$489	\$95	3.2
W105 closet	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	1,240	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	856	0.1	115	0	\$13	\$189	\$20	12.7
CR W107	18	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	18	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	3,199	-1	\$372	\$927	\$215	1.9
CR W106	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	15	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	2,666	-1	\$310	\$818	\$185	2.0
CR W108	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	15	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	2,666	-1	\$310	\$818	\$185	2.0
CR W109	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	15	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	2,666	-1	\$310	\$818	\$185	2.0
CR W110	15	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	15	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	2,666	-1	\$310	\$818	\$185	2.0
Electrical room	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	279	0	\$32	\$73	\$20	1.6
Stairwell 2	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2	Relamp	No	7	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.2	978	0	\$114	\$256	\$70	1.6
Stairwell 2	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
W side 1st floor hallway	19	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 4	Relamp	Yes	19	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,655	0.6	3,377	-1	\$393	\$1,369	\$190	3.0
W side 1st floor hallway	5	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	5	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Main entrance	2	Compact Fluorescent: 4 pin - dome fixture - 4 lamps	Wall Switch	s	104	3,848	2	Relamp	No	2	LED Lamps: 4 pin - dome fixture - 4 lamps	Wall Switch	73	3,848	0.0	264	0	\$31	\$138	\$8	4.2
Main entrance	4	Compact Fluorescent: 4 pin - cane fixture - 1 lamp	Wall Switch	s	26	3,848	2	Relamp	No	4	LED Lamps: 4 pin - cane fixture - 1 lamp	Wall Switch	18	3,848	0.0	132	0	\$15	\$69	\$4	4.2
Main lobby	1	Compact Fluorescent: Circular fixture	Wall Switch	s	50	3,848	2	Relamp	No	1	LED Lamps: Circular fixture	Wall Switch	35	3,848	0.0	63	0	\$7	\$17	\$1	2.2
Main lobby	1	Compact Fluorescent: 4 pin - dome fixture - 4 lamps	Wall Switch	S	104	3,848	2	Relamp	No	1	LED Lamps: 4-pin - dome fixture - 4 lamps	Wall Switch	73	3,848	0.0	132	0	\$15	\$69	\$4	4.2





	Existin	g Conditions					Prop	osed Conditio	ns						Energy In	npact & Fi	nancial An	alysis			
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM#	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Main lobby	8	Compact Fluorescent: 4 pin - cane fixture - 1 lamp	Wall Switch	s	26	3,848	2	Relamp	No	8	LED Lamps: 4 pin - cane fixture - 1 lamp	Wall Switch	18	3,848	0.0	264	0	\$31	\$138	\$8	4.2
Main lobby	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Main office	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	4	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.1	559	0	\$65	\$146	\$40	1.6
Main office	8	Compact Fluorescent: 4 pin - cane fixture - 1 lamp	Wall Switch	S	26	3,848	2	Relamp	No	8	LED Lamps: 4 pin - cane fixture - 1 lamp	Wall Switch	18	3,848	0.0	264	0	\$31	\$138	\$8	4.2
Main office	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Copy room	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	s	93	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.1	800	0	\$93	\$280	\$65	2.3
PA room	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	s	93	3,848	2	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	3,848	0.0	210	0	\$24	\$55	\$15	1.6
Principal office	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.1	800	0	\$93	\$280	\$65	2.3
AP office	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	3,848	2, 3	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.1	533	0	\$62	\$226	\$50	2.8
AP office 2	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	3,848	2, 3	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.1	533	0	\$62	\$226	\$50	2.8
Restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	140	0	\$16	\$37	\$10	1.6
Pantry	1	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	3,848	2	Relamp	No	1	LED - Linear Tubes: (3) 4' Lamps	Wall Switch	44	3,848	0.0	210	0	\$24	\$55	\$15	1.6
Storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	355	0	\$41	\$189	\$20	4.1
File room	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	3,848	2, 3	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.1	533	0	\$62	\$226	\$50	2.8
Conference room	4	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	3,848	2, 3	Relamp	Yes	4	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.2	1,066	0	\$124	\$489	\$95	3.2
Conference room	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	3,848	2, 3	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.1	533	0	\$62	\$380	\$65	5.1
Main office hall	5	Compact Fluorescent: 4 pin - 1 lamp	Wall Switch	S	26	3,848	2, 4	Relamp	Yes	5	LED Lamps: 4 pin - 1 lamp	High/Low Control	18	2,655	0.0	284	0	\$33	\$311	\$5	9.3
Main office hall	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Hall by copy room	8	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	3,848	2, 4	Relamp	Yes	8	LED - Linear Tubes: (3) 4' Lamps	High/Low Control	44	2,655	0.4	2,133	0	\$248	\$663	\$120	2.2
Hall by copy room	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Center stairwell	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	7	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.2	978	0	\$114	\$256	\$70	1.6
Center stairwell	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
C125	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$226	\$50	2.8
Student services	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$226	\$50	2.8
C125 office 1	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$226	\$50	2.8





	Existin	g Conditions					Prop	osed Conditio	าร						Energy In	npact & Fi	nancial An	alysis			
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM#	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
C123 office 2	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$226	\$50	2.8
C125 office 3	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	711	0	\$83	\$262	\$60	2.4
Nurse closet	2	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	1,240	2	Relamp	No	2	LED - Linear Tubes: (2) 2' Lamps	Wall Switch	17	1,240	0.0	44	0	\$5	\$65	\$12	10.4
Nurse's office	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	7	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,244	0	\$145	\$526	\$105	2.9
Nurse's office	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	3,848	2	Relamp	No	1	LED - Linear Tubes: (2) 2' Lamps	Wall Switch	17	3,848	0.0	68	0	\$8	\$33	\$6	3.4
Nurse's check up space	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$380	\$65	5.1
Nurse's check up space	3	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	s	33	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 2' Lamps	Occupancy Sensor	17	2,655	0.0	270	0	\$31	\$98	\$18	2.5
Nurse's restroom	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	S	29	3,848		None	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	0	0	\$0	\$0	\$0	0.0
C Hall first floor	9	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 4	Relamp	Yes	9	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,655	0.3	1,600	0	\$186	\$554	\$90	2.5
C Hall first floor	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
123 computer lab	16	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	3,848	2, 3	Relamp	Yes	16	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	2,655	0.9	5,010	-1	\$583	\$1,438	\$355	1.9
Custodian closet	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	1,240	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	1,240	0.0	45	0	\$5	\$37	\$10	5.1
Electrical panel room	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	279	0	\$32	\$73	\$20	1.6
CR N121	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR N122	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR N119	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR N120	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR N117	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR N118	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR N115	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR N113	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$226	\$50	2.8
N116 Mech	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	279	0	\$32	\$73	\$20	1.6
CR N114	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,066	0	\$124	\$489	\$95	3.2
CR N112	11	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	11	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.3	1,955	0	\$227	\$672	\$145	2.3
CR N111	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,066	0	\$124	\$489	\$95	3.2





	Existin	g Conditions					Prop	osed Condition	าร						Energy In	npact & Fi	nancial An	alysis			
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM#	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
1st floor crossover	5	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2	Relamp	No	5	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.1	698	0	\$81	\$183	\$50	1.6
1st floor crossover	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
North stairwell	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	7	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.2	978	0	\$114	\$256	\$70	1.6
North stairwell	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
E hall 1st floor	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 4	Relamp	Yes	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,655	0.2	1,244	0	\$145	\$481	\$70	2.8
E hall 1st floor	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Girls 1st floor E side	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$380	\$65	5.1
Girls 1st floor E side	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	s	33	3,848	2, 3	Relamp	Yes	1	LED - Linear Tubes: (2) 2' Lamps	Occupancy Sensor	17	2,655	0.0	90	0	\$10	\$33	\$6	2.5
Boys 1st floor E side	4	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	4	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	711	0	\$83	\$416	\$75	4.1
E145 Comp lab	16	Linear Fluorescent - T8: 4' T8 (32W) - 4L	Wall Switch	S	114	3,848	2, 3	Relamp	Yes	16	LED - Linear Tubes: (4) 4' Lamps	Occupancy Sensor	58	2,655	0.9	5,010	-1	\$583	\$1,438	\$355	1.9
E146 Comp lab	16	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	16	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.5	2,844	-1	\$331	\$854	\$195	2.0
Comp storage	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	1,240	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	856	0.1	115	0	\$13	\$189	\$40	11.2
E146 Electrical room	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	279	0	\$32	\$73	\$20	1.6
E147 Music room	14	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	14	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,488	-1	\$289	\$781	\$175	2.1
E147 office	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$226	\$50	2.8
E147 Sound room	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	2	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	355	0	\$41	\$189	\$20	4.1
Hall by Music room	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 4	Relamp	Yes	6	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,655	0.2	1,066	0	\$124	\$444	\$60	3.1
Hall by Music room	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Hall by pane room	9	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 4	Relamp	Yes	9	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,655	0.3	1,600	0	\$186	\$554	\$90	2.5
Hall by pane room	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
E152 storage	5	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	s	93	3,848	2, 3	Relamp	Yes	5	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.2	1,333	0	\$155	\$390	\$75	2.0
E151 office	2	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	s	93	3,848	2, 3	Relamp	Yes	2	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.1	533	0	\$62	\$226	\$30	3.2
CR E150	8	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	s	93	3,848	2, 3	Relamp	Yes	8	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR E149	8	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	3,848	2, 3	Relamp	Yes	8	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR E149	1	Exit Signs: LED - 2 W Lamp	None		6	8,760	_	None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0





	Existin	g Conditions					Prop	osed Conditio	ns						Energy In	npact & Fi	nancial An	alysis			
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM#	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
CR E148	8	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	3,848	2, 3	Relamp	Yes	8	LED - Linear Tubes: (3) 4' Lamps	Occupancy Sensor	44	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
Restrooms	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	279	0	\$32	\$73	\$20	1.6
E restroom hall	6	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	3,848	2, 4	Relamp	Yes	6	LED - Linear Tubes: (3) 4' Lamps	High/Low Control	44	2,655	0.3	1,600	0	\$186	\$554	\$90	2.5
E restroom hall	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Hall G 1st floor	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 4	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,655	0.4	2,133	0	\$248	\$888	\$120	3.1
Hall G 1st floor	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Boys 1st floor G hall	3	Linear Fluorescent - T8: 4' T8 (32W) - 3L	Wall Switch	S	93	3,848	2, 4	Relamp	Yes	3	LED - Linear Tubes: (3) 4' Lamps	High/Low Control	44	2,655	0.1	800	0	\$93	\$389	\$45	3.7
Custodian closet	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	1,240	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	1,240	0.0	45	0	\$5	\$37	\$10	5.1
Lighting room	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	279	0	\$32	\$73	\$20	1.6
G154 Band room	36	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	36	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	1.1	6,398	-1	\$744	\$2,125	\$465	2.2
G154 Band room	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Weight room	24	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	24	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.7	4,266	-1	\$496	\$1,416	\$310	2.2
Weight room	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Weight room office	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	140	0	\$16	\$37	\$10	1.6
Hall by kitchen	9	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 4	Relamp	Yes	9	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,655	0.3	1,600	0	\$186	\$554	\$90	2.5
Hall by kitchen	2	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	2	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Girls 1st floor café	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$380	\$65	5.1
Hall by Auxillary Gym	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 4	Relamp	Yes	8	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,655	0.2	1,422	0	\$165	\$517	\$80	2.6
Hall by Auxillary Gym	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Boys 1st floor M side	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$380	\$65	5.1
Boys 1st floor M side	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	3,848	2, 3	Relamp	Yes	1	LED - Linear Tubes: (2) 2' Lamps	Occupancy Sensor	17	2,655	0.0	90	0	\$10	\$33	\$6	2.5
Girls 1st floor M side	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$380	\$65	5.1
Girls 1st floor M side	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	3,848	2, 3	Relamp	Yes	1	LED - Linear Tubes: (2) 2' Lamps	Occupancy Sensor	17	2,655	0.0	90	0	\$10	\$33	\$6	2.5
CR M132	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	8	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,422	0	\$165	\$562	\$115	2.7
CR M130	8	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	8	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,422	0	\$165	\$562	\$115	2.7





	Existin	g Conditions					Prop	osed Conditio	ns						Energy In	npact & Fi	nancial An	alysis			
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM#	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
M128 Police	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$226	\$50	2.8
M hall 1st floor	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 4	Relamp	Yes	7	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,655	0.2	1,244	0	\$145	\$481	\$70	2.8
M hall 1st floor	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Custodian closet	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	1,240	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	1,240	0.0	90	0	\$10	\$73	\$20	5.1
Electrical closet	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	1,240	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	1,240	0.0	90	0	\$10	\$73	\$20	5.1
CR S134	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR S135	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR S136	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR S137	20	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	20	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.6	3,555	-1	\$413	\$1,270	\$270	2.4
Chemical room	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	140	0	\$16	\$37	\$10	1.6
CR S138	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
S139 Mech room	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	12	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.3	1,676	0	\$195	\$438	\$120	1.6
CR S140	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	279	0	\$32	\$73	\$20	1.6
S139 Mech room	1	Linear Fluorescent - T8: 4' T8 (32W) - 1L	Wall Switch	S	32	3,848	2	Relamp	No	1	LED - Linear Tubes: (1) 4' Lamp	Wall Switch	15	3,848	0.0	74	0	\$9	\$18	\$5	1.5
S142 Teachers lounge	3	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	3	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.1	533	0	\$62	\$226	\$50	2.8
S142 restroom	1	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2	Relamp	No	1	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	140	0	\$16	\$37	\$10	1.6
S142	1	Linear Fluorescent - T8: 2' T8 (17W) - 2L	Wall Switch	S	33	3,848	2	Relamp	No	1	LED - Linear Tubes: (2) 2' Lamps	Wall Switch	17	3,848	0.0	68	0	\$8	\$33	\$6	3.4
CR S141	6	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	6	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.2	1,066	0	\$124	\$489	\$95	3.2
CR S143	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
CR S144	12	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 3	Relamp	Yes	12	LED - Linear Tubes: (2) 4' Lamps	Occupancy Sensor	29	2,655	0.4	2,133	0	\$248	\$708	\$155	2.2
S Hall 1st floor	11	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2, 4	Relamp	Yes	11	LED - Linear Tubes: (2) 4' Lamps	High/Low Control	29	2,655	0.3	1,955	0	\$227	\$852	\$110	3.3
S Hall 1st floor	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
South stairwell	7	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2	Relamp	No	7	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.2	978	0	\$114	\$256	\$70	1.6
South stairwell	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Stage	22	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	22	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.5	3,073	-1	\$357	\$803	\$220	1.6





-	Existin	g Conditions					Prop	osed Conditio	ns						Energy Ir	npact & Fi	nancial Ar	alysis			
Location	Fixture Quantity	Fixture Description	Control System	Light Level	Watts per Fixture	Annual Operating Hours	ECM#	Fixture Recommendation	Add Controls?	Fixture Quantity	Fixture Description	Control System	Watts per Fixture	Annual Operating Hours	Total Peak kW Savings	Total Annual kWh Savings		Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Stage	1	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	1	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Stage Upstairs	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	3,848	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	279	0	\$32	\$73	\$20	1.6
Stage Upstairs	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	s	62	3,848	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	3,848	0.0	279	0	\$32	\$73	\$20	1.6
Parking lot	24	High-Pressure Sodium: (1) 70W Lamp	Timeclock		95	4,380	1	Fixture Replacement	No	24	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Timeclock	29	4,380	0.8	6,990	0	\$829	\$23,183	\$2,400	25.1
Door front	11	Compact Fluorescent: Door wall mount - 4 pin - 2 lamps	Photocell		52	4,380	2	Relamp	No	11	LED Lamps: Door wall mount - 4 pin - 2 lamps	Photocell	36	4,380	0.1	752	0	\$89	\$379	\$22	4.0
Canopy	4	Compact Fluorescent: Front door - 4 pin - 1 lamp	Photocell		26	4,380	2	Relamp	No	4	LED Lamps: Front door - 4 pin - 1 lamp	Photocell	18	4,380	0.0	137	0	\$16	\$69	\$4	4.0
Wall mount	13	High-Pressure Sodium: (1) 70W Lamp	Timeclock		95	4,380	1	Fixture Replacement	No	13	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Timeclock	29	4,380	0.4	3,787	0	\$449	\$12,558	\$1,300	25.1
Wall pack	1	Metal Halide: (1) 70W Lamp	Photocell		95	4,380	1	Fixture Replacement	No	1	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Photocell	29	4,380	0.0	291	0	\$35	\$966	\$100	25.1
Door canopy	5	High-Pressure Sodium: (1) 70W Lamp	Timeclock		95	4,380	1	Fixture Replacement	No	5	LED - Fixtures: Outdoor Wall- Mounted Area Fixture	Timeclock	29	4,380	0.2	1,456	0	\$173	\$4,830	\$500	25.1
Auditorium	54	Halogen Incandescent: Minican - 1 lamp	Daylight Dimming	S	200	2,309	2	Relamp	No	54	LED Lamps: Minican - 1 lamp	Daylight Dimming	30	2,309	6.6	23,314	-5	\$2,711	\$1,900	\$54	0.7
Auditorium	3	Exit Signs: LED - 2 W Lamp	None		6	8,760		None	No	3	Exit Signs: LED - 2 W Lamp	None	6	8,760	0.0	0	0	\$0	\$0	\$0	0.0
Auditorium	18	Halogen Incandescent: Spot light - 1 lamp	Daylight Dimming	S	750	2,309	2	Relamp	No	18	LED Lamps: Spot light - 1 lamp	Daylight Dimming	113	2,309	8.3	29,143	-6	\$3,389	\$544	\$18	0.2
Auditorium closet	2	Linear Fluorescent - T8: 4' T8 (32W) - 2L	Wall Switch	S	62	1,240	2	Relamp	No	2	LED - Linear Tubes: (2) 4' Lamps	Wall Switch	29	1,240	0.0	90	0	\$10	\$73	\$20	5.1





Motor Inventory & Recommendations

	tory & Recon		g Conditions						Prop	osed Co	nditions			Energy Im	pact & Fina	ancial Anal	vsis			
Location	Area(s)/System(s) Served	Motor Quantity	Motor Application		Full Load Efficiency	VFD Control?	Remaining Useful Life	Annual Operating Hours	ECM#	Install High Efficiency Motors?	Full Load	Install	Number of VFDs	Total Peak	Total Annual kWh Savings	Total Annual MMBtu Savings		Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Roof	RTU-2	1	Supply Fan	20.0	93.0%	Yes	W	1,040		No	93.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-2	2	Exhaust Fan	3.0	89.5%	Yes	W	1,040		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-1	1	Supply Fan	20.0	93.0%	Yes	W	1,040		No	93.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-1	2	Exhaust Fan	3.0	89.5%	Yes	W	1,040		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	EF-6	1	Exhaust Fan	0.3	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	EF-1	1	Exhaust Fan	0.5	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	EF	6	Exhaust Fan	0.5	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	EF-1	1	Exhaust Fan	0.8	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	EF-2A	1	Exhaust Fan	0.5	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	EF	3	Exhaust Fan	0.5	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	EF-3B	1	Exhaust Fan	1.0	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	ERV-5A	1	Supply Fan	7.5	91.7%	No	W	2,745		No	91.7%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	ERV-5A	1	Exhaust Fan	3.0	89.5%	No	w	2,745		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	EF	1	Exhaust Fan	0.3	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	ERV-2	1	Supply Fan	2.0	86.5%	No	W	2,745		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	ERV-2	1	Exhaust Fan	1.0	85.5%	No	W	2,745		No	85.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	HP-1 Cafeteria	1	Supply Fan	7.5	91.7%	No	w	3,391	5	No	91.7%	Yes	1	2.1	7,759	0	\$920	\$4,738	\$600	4.5
Roof	HP-2 Cafeteria	1	Supply Fan	7.5	91.7%	No	W	3,391	5	No	91.7%	Yes	1	2.1	7,759	0	\$920	\$4,738	\$600	4.5
Roof	ERV-5B	1	Supply Fan	7.5	91.7%	No	w	2,745	5	No	91.7%	Yes	1	2.1	6,281	0	\$744	\$4,738	\$600	5.6
Roof	ERV-5B	1	Exhaust Fan	3.0	89.5%	No	W	2,745	5	No	89.5%	Yes	1	0.9	2,574	0	\$305	\$3,884	\$240	11.9





		Existin	g Conditions						Prop	osed Co	nditions			Energy Im	pact & Fina	ancial Anal	ysis			
Location	Area(s)/System(s) Served	Motor Quantity	Motor Application		Full Load Efficiency	VFD Control?	Remaining Useful Life	Annual Operating Hours	ECM#	Install High Efficiency Motors?	Full Load Efficiency	Install VFDs?	Number of VFDs	Total Peak	Total Annual	Total Annual MMBtu Savings		Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Roof	RTU-4 Home Economics	1	Supply Fan	3.0	89.5%	No	W	1,040	5	No	89.5%	Yes	1	0.9	975	0	\$116	\$3,884	\$240	31.5
Roof	RTU-4 Home Economics	1	Exhaust Fan	2.0	86.5%	No	W	1,040	5	No	86.5%	Yes	1	0.6	673	0	\$80	\$3,261	\$160	38.9
Roof	EF-2B	1	Exhaust Fan	0.8	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-5 Gym	1	Supply Fan	5.0	89.5%	No	W	1,040		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-5 Gym	1	Exhaust Fan	5.0	89.5%	No	W	1,040		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-6 Gym	1	Supply Fan	5.0	89.5%	No	W	1,040		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-6 Gym	1	Exhaust Fan	5.0	89.5%	No	W	1,040		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	ERV-4	1	Supply Fan	7.5	91.7%	No	W	2,745	5	No	91.7%	Yes	1	2.1	6,281	0	\$744	\$4,738	\$600	5.6
Roof	ERV-4	1	Exhaust Fan	3.0	89.5%	No	W	2,745	5	No	89.5%	Yes	1	0.9	2,574	0	\$305	\$3,884	\$240	11.9
Teachers lounge	UV Teachers lounge	2	Supply Fan	0.1	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-3 Lobby	1	Supply Fan	2.0	86.5%	No	W	1,040		No	86.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-3 Lobby	1	Exhaust Fan	1.0	82.5%	No	W	1,040		No	82.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	ERV-3	1	Supply Fan	0.5	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	ERV-3	1	Exhaust Fan	0.5	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Storage	AH- 2A, 2B	2	Supply Fan	5.0	89.5%	No	W	2,745	5	No	89.5%	Yes	2	2.9	8,580	0	\$1,017	\$8,152	\$800	7.2
Classrooms	Classrooms	2	Supply Fan	0.2	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Storage	Geothermal heat pump	1	Heating Hot Water Pump	7.5	91.7%	No	W	0		No	91.7%	No		0.0	0	0	\$0	\$0	\$0	0.0
Storage	DHW Circulation	1	Water Supply Pump	0.0	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Boiler room	Boiler	2	Heating Hot Water Pump	5.0	89.5%	No	W	400		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Classrooms	Uvs	22	Supply Fan	0.3	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0





		Existin	g Conditions						Prop	osed Co	nditions	;		Energy Im	pact & Fina	ancial Anal	ysis			
Location	Area(s)/System(s) Served	Motor Quantity	Motor Application		Full Load Efficiency	VFD Control?	Remaining Useful Life	Annual Operating Hours	ECM#	Install High Efficiency Motors?	Full Load Efficiency	Install VFDs?	Number of VFDs	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Boiler room	Geothermal waterpump	2	Water-Source Heat Pump Circulation Pump	75.0	95.0%	No	W	4,000	6	No	95.0%	Yes	2	35.1	176,684	0	\$20,942	\$46,795	\$0	2.2
Pump room	DHW recirculation	1	Water Supply Pump	0.0	60.0%	No	W	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Elevator machine	Hydraulic pump	1	Process Pump	15.0	93.0%	No	W	3,391		No	93.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Storage	DHW recirculation	1	Water Supply Pump	0.1	30.0%	No	W	2,745		No	30.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Storage	Geothermal heat pump	2	Heating Hot Water Pump	5.0	89.0%	No	W	400		No	89.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Auditorium	AH - 1A, 1B	2	Supply Fan	5.0	89.5%	No	W	2,745	5	No	89.5%	Yes	2	2.9	8,580	0	\$1,017	\$8,152	\$800	7.2
Auditorium	AHU	1	Supply Fan	1.0	82.0%	No	W	2,745		No	82.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Auditorium	HP3	1	Supply Fan	1.0	82.0%	No	W	2,745		No	82.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Unknown	AH 1D	1	Supply Fan	5.0	89.5%	No	W	2,745	5	No	89.5%	Yes	1	1.4	4,290	0	\$508	\$4,076	\$400	7.2
Auditorium	Library unit	1	Supply Fan	1.0	89.5%	No	В	2,745		No	89.5%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Exhaust fans	5	Exhaust Fan	0.3	60.0%	No	В	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Exhaust fans	1	Exhaust Fan	0.5	60.0%	No	В	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Electrical rooms	1	Exhaust Fan	0.1	60.0%	No	В	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Storage room	1	Exhaust Fan	0.1	60.0%	No	В	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Toilet room	1	Exhaust Fan	0.1	60.0%	No	В	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Toilet room, Janitors closet	1	Exhaust Fan	0.1	60.0%	No	В	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Teacher's toilet room	1	Exhaust Fan	0.2	60.0%	No	В	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Unknown	2	Supply Fan	0.1	60.0%	No	В	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Unknown	2	Supply Fan	0.3	60.0%	No	В	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0
Roof	Unknown	5	Supply Fan	0.5	60.0%	No	В	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0





		Existin	g Conditions						Prop	osed Co	nditions			Energy Im	pact & Fina	ancial Ana	lysis			
Location	Area(s)/System(s) Served	Motor Quantity	Motor Application		Full Load Efficiency		Remaining Useful Life	Operating		Install High Efficiency Motors?	Full Load Efficiency		Number of VFDs		Total Annual kWh Savings	Total Annual MMBtu Savings		Total Installation Cost		Simple Payback w/ Incentives in Years
Various spaces	Various spaces	19	Supply Fan	0.3	60.0%	No	В	2,745		No	60.0%	No		0.0	0	0	\$0	\$0	\$0	0.0

Electric HVAC Inventory & Recommendations

	,		- Caralitiana				D								For a super land	0 Fin		Landa.			
		Existin	g Conditions				Prop	osed Co	ndition	S					Energy Im	pact & Fin	ancial Ana	lysis			
Location	Area(s)/System(s) Served	System Quantity	System Type	Capacity	Heating Capacity per Unit (MBh)	Remaining Useful Life	ECM#	Install High Efficiency System?	System Quantity	System Type	Cooling Capacity per Unit (Tons)	Heating Capacity per Unit (MBh)	Cooling Mode Efficiency (SEER/EER)	Heating Mode Efficiency (COP)	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Roof	CU-2/AC-2	1	Split-System AC	1.00		В	7	Yes	1	Split-System AC	1.00		14.00		0.1	118	0	\$14	\$1,496	\$92	100.1
Roof	RTU-2 Classrooms	1	Packaged AC	40.00		В	7	Yes	1	Packaged AC	40.00		9.50		1.4	2,751	0	\$326	\$88,639	\$0	271.9
Roof	RTU-1 Classrooms	1	Packaged AC	40.00		В	7	Yes	1	Packaged AC	40.00		9.50		1.4	2,751	0	\$326	\$88,639	\$0	271.9
Roof	CU-4/AC-4	1	Split-System AC	1.00		В	7	Yes	1	Split-System AC	1.00		14.00		0.1	118	0	\$14	\$1,496	\$92	100.1
Roof	CU-1/AC-1	1	Split-System AC	1.00		В	7	Yes	1	Split-System AC	1.00		14.00		0.1	118	0	\$14	\$1,496	\$92	100.1
Roof	BLR Coach Office	1	Split-System AC	1.00		В	7	Yes	1	Split-System AC	1.00		14.00		0.1	118	0	\$14	\$1,496	\$92	100.1
Heat pump room	Unit heater	1	Electric Resistance Heat		10.23	В		No							0.0	0	0	\$0	\$0	\$0	0.0
Heat pump room	Unit heater	1	Electric Resistance Heat		10.23	В		No							0.0	0	0	\$0	\$0	\$0	0.0
Roof	RTU-4 Home Ec	1	Packaged AC	15.00		В	7	Yes	1	Packaged AC	15.00		11.50		1.9	3,629	0	\$430	\$20,908	\$1,185	45.9
Roof	RTU-5 Gym	1	Packaged AC	18.00		В	7	Yes	1	Packaged AC	18.00		11.50		2.6	5,113	0	\$606	\$25,089	\$1,422	39.1
Roof	RTU-6 Gym	1	Packaged AC	18.00		В	7	Yes	1	Packaged AC	18.00		11.50		2.6	4,800	0	\$569	\$25,089	\$1,422	41.6
Roof	RTU-3 Lobby	1	Packaged AC	10.00		В	7	Yes	1	Packaged AC	10.00		11.50		1.4	2,667	0	\$316	\$17,821	\$730	54.1
Roof	CU-3/AC-3	1	Split-System AC	1.00		В	7	Yes	1	Split-System AC	1.00		14.00		0.1	118	0	\$14	\$1,496	\$92	100.1
Storage	Unit heater	2	Electric Resistance Heat		10.23	В		No							0.0	0	0	\$0	\$0	\$0	0.0
GLR Coach office	GLR Coach office	1	Split-System AC	1.00		В	7	Yes	1	Split-System AC	1.00		14.00		0.1	118	0	\$14	\$1,496	\$92	100.1
Auditorium	Library unit	1	Electric Resistance Heat		102.30	В		No							0.0	0	0	\$0	\$0	\$0	0.0
Classrooms	Classrooms	1	Water Source HP	0.83	18.20	В		No							0.0	0	0	\$0	\$0	\$0	0.0
Unknown	Unknown	5	Water Source HP	3.00	40.00	В		No							0.0	0	0	\$0	\$0	\$0	0.0
Unknown	Unknown	2	Water Source HP	2.00	30.00	В		No							0.0	0	0	\$0	\$0	\$0	0.0
Unknown	Unknown	1	Split-System AC	0.75		В		No							0.0	0	0	\$0	\$0	\$0	0.0





-		Existing	g Conditions				Prop	osed Co	ndition	S					Energy Im	pact & Fina	ancial Ana	lysis			
Location	Area(s)/System(s) Served	System Quantity	System Type	Cooling Capacity per Unit (Tons)	Heating Capacity per Unit (kBtu/hr)	Remaining Useful Life	ECM#	Install High Efficiency System?	System Quantity	System Type	Cooling Capacity per Unit (Tons)	Heating Capacity per Unit (kBtu/hr)	Cooling Mode Efficiency (SEER/EER)	Heating Mode Efficiency (COP)	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Classroom	Classroom	1	Water Source HP	3.00	44.40	В		No							0.0	0	0	\$0	\$0	\$0	0.0
Classrooms	Classrooms	1	Water Source HP	1.50	11.80	В		No							0.0	0	0	\$0	\$0	\$0	0.0
Classrooms	Classrooms	1	Water Source HP	2.00	18.20	В		No							0.0	0	0	\$0	\$0	\$0	0.0
Classrooms	Classrooms	1	Water Source HP	2.50	21.20	В		No							0.0	0	0	\$0	\$0	\$0	0.0
Classrooms	Classrooms	1	Water Source HP	3.00	24.50	В		No							0.0	0	0	\$0	\$0	\$0	0.0
Classrooms	Classrooms	1	Water Source HP	3.50	29.20	В		No							0.0	0	0	\$0	\$0	\$0	0.0
Classrooms	Classrooms	1	Water Source HP	4.00	36.50	В		No							0.0	0	0	\$0	\$0	\$0	0.0
Classrooms	Classrooms	1	Water Source HP	4.50	38.80	В		No							0.0	0	0	\$0	\$0	\$0	0.0
Classrooms	Classrooms	2	Water Source HP	10.00	94.30	В	8	Yes	1	Water Source HP	10.00	94.30	14.00	4.50	6.1	17,363	0	\$2,058	\$12,356	\$810	5.6
Classrooms	Classrooms	1	Water Source HP	1.00	6.70	В	8	Yes	1	Water Source HP	1.00	6.70	14.00	4.80	0.3	829	0	\$98	\$2,780	\$81	27.5
Classrooms	Classrooms	1	Water Source HP	1.25	10.00	В	8	Yes	1	Water Source HP	1.25	10.00	14.00	4.80	1.0	2,161	0	\$256	\$3,475	\$101	13.2
Classrooms	Classrooms	1	Water Source HP	1.50	10.60	В	8	Yes	1	Water Source HP	1.50	10.60	14.00	4.80	0.8	1,696	0	\$201	\$4,169	\$122	20.1
Classrooms	Classrooms	1	Water Source HP	0.83	7.90	В		No							0.0	0	0	\$0	\$0	\$0	0.0

Fuel Heating Inventory & Recommendations

	_	Existin	g Conditions			Prop	osed Co	ndition	S				Energy Im	pact & Fina	ancial Ana	lysis			
Location		System Quantity	System Type	Output Capacity per Unit (MBh)	_	ECM #	Install High Efficiency System?	System Quantity	System Type		Heating Efficiency	Efficiency	Total Peak	Total Annual kWh Savings	Total Annual MMBtu Savings		Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Roof	RTU-2 Classrooms	1	Furnace	437.00	В	9	Yes	1	Furnace	437.00	95.00%	AFUE	0.0	0	24	\$255	\$9,901	\$400	37.3
Roof	RTU-1 Classrooms	1	Furnace	437.00	В	9	Yes	1	Furnace	437.00	95.00%	AFUE	0.0	0	24	\$255	\$9,901	\$400	37.3
Roof	RTU-4 Home Ec	1	Furnace	219.00	В	9	Yes	1	Furnace	219.00	95.00%	AFUE	0.0	0	12	\$128	\$4,962	\$400	35.7
Roof	RTU-5 Gym	1	Furnace	219.00	В	9	Yes	1	Furnace	219.00	95.00%	AFUE	0.0	0	12	\$128	\$4,962	\$400	35.7
Roof	RTU-6 Gym	1	Furnace	219.00	В	9	Yes	1	Furnace	219.00	95.00%	AFUE	0.0	0	12	\$128	\$4,962	\$400	35.7
Roof	RTU-3 Lobby	1	Furnace	146.00	В	9	Yes	1	Furnace	146.00	95.00%	AFUE	0.0	0	8	\$85	\$3,308	\$400	34.1
Boiler room	B-1,2	2	Condensing Hot Water Boiler	1,020.00	W		No						0.0	0	0	\$0	\$0	\$0	0.0





DHW Inventory & Recommendations

		Existin	g Conditions		Prop	osed Co	ndition	ıs				Energy Im	pact & Fin	ancial Ana	lysis			
Location		System Quantity	System Type	Remaining Useful Life	ECM#	Replace?	System Quantity	System Type	Fuel Type	System Efficiency			Total Annual kWh Savings	MMRtu	Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
2nd floor New section	Restrooms	1	Storage Tank Water Heater (≤ 50 Gal)	В		No						0.0	0	0	\$0	\$0	\$0	0.0
Pump room	1st floor restrooms - old section	2	Storage Tank Water Heater (> 50 Gal)	В	10	Yes	2	Storage Tank Water Heater (> 50 Gal)	Natural Gas	80.00%	Et	0.0	0	8	\$84	\$42,092	\$1,470	482.4
1st floor New section	Restrooms	1	Storage Tank Water Heater (≤ 50 Gal)	В		No						0.0	0	0	\$0	\$0	\$0	0.0

Low-Flow Device Recommendations

	Reco	mmeda	ntion Inputs			Energy Im	pact & Fina	ancial Ana	lysis			
Location	ECM#	Device Quantity	Device Type	Existing Flow Rate (gpm)	Proposed Flow Rate (gpm)	Total Peak	Total Annual kWh Savings	MMRtu	Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	11	20	Faucet Aerator (Lavatory)	2.20	0.50	0.0	0	38	\$406	\$143	\$0	0.4

Walk-In Cooler/Freezer Inventory & Recommendations

	Existin	g Conditions	Propo	sed Condit	ions		Energy Im	pact & Fina	ancial Ana	lysis			
Location	Cooler/ Freezer Quantity	Case	ECM#	Install EC Evaporator Fan Motors?	Install Electric Defrost Control?	Install Evaporator Fan Control?		Total Annual kWh Savings	MANARtu	Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	1	Cooler (35F to 55F)	12	Yes	No	No	0.0	412	0	\$49	\$303	\$0	6.2
Kitchen	1	Medium Temp Freezer (0F to 30F)	12, 13	Yes	Yes	No	0.1	2,058	0	\$244	\$1,125	\$50	4.4





Commercial Refrigerator/Freezer Inventory & Recommendations

	Existin	Existing Conditions			osed Conditions Energy Impact & Financial Analysis							
Location	Quantity	Refrigerator/Freezer Type	ENERGY STAR Qualified?	ECM #	Install ENERGY STAR Equipment?	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings	Total Annual Energy Cost Savings	Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	2	Stand-Up Refrigerator, Glass Door (≤15 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Stand-Up Refrigerator, Glass Door (31 - 50 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Stand-Up Refrigerator, Glass Door (16 - 30 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Stand-Up Refrigerator, Solid Door (16 - 30 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	2	Stand-Up Refrigerator, Solid Door (31 - 50 cu. ft.)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	2	Freezer Chest	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0

Commercial Ice Maker Inventory & Recommendations

	Existin	g Conditions	Proposed (Conditions	Energy Impact & Financial Analysis							
Location	Quantity	Ice Maker Type	ENERGY STAR Qualified?	ECM#	Install ENERGY STAR Equipment?	Total Peak	Total Annual kWh Savings	MMRtu	Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	1	Ice Making Head (<450 Ibs/day), Batch	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0





Cooking Equipment Inventory & Recommendations

Existing Conditions					Conditions	Energy Impact & Financial Analysis						
Location	Quantity	Equipment Type	High Efficiency Equipement?	ECM#	Install High Efficiency Equipment?	Total Peak kW Savings	Total Annual kWh Savings	Total Annual MMBtu Savings		Total Installation Cost	Total Incentives	Simple Payback w/ Incentives in Years
Kitchen	1	Insulated Food Holding Cabinet (1/2 Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Insulated Food Holding Cabinet (Full Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Gas Combination Oven/Steam Cooker (<15 Pans)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Gas Combination Oven/Steam Cooker (<15 Pans)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Gas Convection Oven (Full Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Gas Convection Oven (Full Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Gas Steamer	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0
Kitchen	1	Insulated Food Holding Cabinet (1/2 Size)	Yes		No	0.0	0	0	\$0	\$0	\$0	0.0





Plug Load Inventory

riag Load iii		g Conditions		
Location	Quantity	Equipment Description	Energy Rate (W)	ENERGY STAR Qualified?
Russel OB Middle School	2	Pretzel machine	250.0	Yes
Russel OB Middle School	303	Desktop Computer	145.0	Yes
Russel OB Middle School	25	Laptop	75.0	Yes
Russel OB Middle School	60	Printer - Small	60.0	Yes
Russel OB Middle School	11	Printer - Medium	80.0	Yes
Russel OB Middle School	9	Printer - large	200.0	Yes
Russel OB Middle School	3	Paper Shredder	150.0	Yes
Russel OB Middle School	61	Projector	300.0	Yes
Russel OB Middle School	17	Microwave	900.0	Yes
Russel OB Middle School	7	Refrigerator - Small	60.0	Yes
Russel OB Middle School	5	Refrigerator - Medium	80.0	Yes
Russel OB Middle School	8	Refrigerator - Large	220.0	Yes
Russel OB Middle School	7	Coffee Machine	400.0	Yes
Russel OB Middle School	1	Toaster	900.0	Yes
Russel OB Middle School	8	Toaster Oven	1,200.0	Yes
Russel OB Middle School	1	Clothes Washer	900.0	Yes
Russel OB Middle School	1	Clothes dryer	1,500.0	Yes
Russel OB Middle School	4	Dishwasher	900.0	Yes
Russel OB Middle School	1	Television - CRT	130.0	Yes
Russel OB Middle School	1	Television - Plasma	120.0	Yes
Russel OB Middle School	1	Television - LED	100.0	Yes
Russel OB Middle School	1	Electric stove	1,500.0	Yes
Russel OB Middle School	5	Fume hood	100.0	Yes
Russel OB Middle School	40	Smart boards	5.0	Yes





Vending Machine Inventory & Recommendations

		Existing Conditions		Proposed	Conditions	Energy Impact & Financial Analysis						
Locatio	on	Quantity	Vending Machine Type	ECM#	Install Controls?		Total Annual kWh Savings	MANARHII	Total Annual Energy Cost Savings		Total Incentives	Simple Payback w/ Incentives in Years
Various sp	paces	4	Refrigerated	14	Yes	0.7	6,447	0	\$764	\$920	\$200	0.9





APPENDIX B: ENERGY STAR® STATEMENT OF ENERGY PERFORMANCE

EUI is presented in terms of *site energy* and *source energy*. Site energy is the amount of fuel and electricity consumed by a building as reflected in utility bills. Source energy includes fuel consumed to generate electricity consumed at the site, factoring in electric production and distribution losses for the region.



ENERGY STAR[®] Statement of Energy Performance

48

Russell O Brackman Middle School

Primary Property Type: K-12 School Gross Floor Area (ft²): 172,970

Built: 1990

Score 1

For Year Ending: January 31, 2019 Date Generated: July 30, 2019

1. The ENERGY STAR score is a 1-100 assessment of a building's energy efficiency as compared with similar buildings nationwide, adjusting for climate and business activity.

Property & Contact Information Property Address Property Owner Primary Contact Russell O Brackman Middle School Barnegat Township School District Stephen Brennan 600 Barnegat Blvd North 550 BARENGAT BLVD. NORTH 550 BARENGAT BLVD. NORTH Barnegat, New Jersey 08005 Barnegat, NJ 08005 Barnegat, NJ 08005 609-698-5800 SBRENNAN@BARNEGATSCHOOLS.COI Property ID: 7071504 Energy Consumption and Energy Use Intensity (EUI) Annual Energy by Fuel National Median Comparison Site EUI Electric - Grid (kBtu) 6,237,551 (79%) Natural Gas (kBtu) 1,700,377 (21%) National Median Site EUI (kBtu/ft²) 45.1 45.9 kBtu/ft² National Median Source EUI (kBtu/ft²) 109.5 % Diff from National Median Source EUI 2% **Annual Emissions** Source EUI Greenhouse Gas Emissions (Metric Tons 722 111.3 kBtu/ft² CO2e/year) Signature & Stamp of Verifying Professional _ (Name) verify that the above information is true and correct to the best of my knowledge. Signature: _ Date: Licensed Professional

Professional Engineer Stamp (if applicable)





APPENDIX C: GLOSSARY

Blended Rate Used to calculate fiscal savings associated with measures. The blended rate is calculated by dividing the amount of your bill by the total energy use. For example, if your bill is \$22,217.22, and you used 266,400 kilowatt-hours, your blended rate is 8.3 cents per kilowatt-hour. Btu British thermal unit: a unit of energy equal to the amount of heat required to increase the temperature of one pound of water by one-degree Fahrenheit. CHP Combined heat and power. Also referred to as cogeneration. COP Coefficient of performance: a measure of efficiency in terms of useful energy delivered divided by total energy input. Demand Response Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives. DCV Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® Is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil).	TERM	DEFINITION						
the temperature of one pound of water by one-degree Fahrenheit. CHP Combined heat and power. Also referred to as cogeneration. COP Coefficient of performance: a measure of efficiency in terms of useful energy delivered divided by total energy input. Demand Response Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives. DCV Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil). GHG Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from	Blended Rate	calculated by dividing the amount of your bill by the total energy use. For example, if your bill is \$22,217.22, and you used 266,400 kilowatt-hours, your blended rate is 8.3						
COP Coefficient of performance: a measure of efficiency in terms of useful energy delivered divided by total energy input. Demand Response Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives. DCV Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil). GHG Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from	Btu							
Demand Response Demand response reduces or shifts electricity usage at or among participating buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives. DCV Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil). GHG Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from	СНР	Combined heat and power. Also referred to as cogeneration.						
buildings/sites during peak energy use periods in response to time-based rates or other forms of financial incentives. DCV Demand control ventilation: a control strategy to limit the amount of outside air introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil). GHG Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from	СОР							
Introduced to the conditioned space based on actual occupancy need. US DOE United States Department of Energy EC Motor Electronically commutated motor ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil). GHG Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from	Demand Response	buildings/sites during peak energy use periods in response to time-based rates or other						
ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil). GHG Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from	DCV							
ECM Energy conservation measure EER Energy efficiency ratio: a measure of efficiency in terms of cooling energy provided divided by electric input. EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil). GHG Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from	US DOE	United States Department of Energy						
EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil). GHG Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from	EC Motor	Electronically commutated motor						
EUI Energy Use Intensity: measures energy consumption per square foot and is a standard metric for comparing buildings' energy performance. Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil). GHG Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from	ECM	Energy conservation measure						
Energy Efficiency Reducing the amount of energy necessary to provide comfort and service to a building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil). GHG Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from	EER							
building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of service. ENERGY STAR® ENERGY STAR® is the government-backed symbol for energy efficiency. The ENERGY STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil). GHG Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from	EUI	=						
STAR® program is managed by the EPA. EPA United States Environmental Protection Agency Generation The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil). GHG Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from	Energy Efficiency	building/area. Achieved through the installation of new equipment and/or optimizing the operation of energy use systems. Unlike conservation, which involves some reduction of service, energy efficiency provides energy reductions without sacrifice of						
Generation The process of generating electric power from sources of primary energy (e.g., natural gas, the sun, oil). GHG Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from	ENERGY STAR®							
gas, the sun, oil). GHG Greenhouse gas gases that are transparent to solar (short-wave) radiation but opaque to long-wave (infrared) radiation, thus preventing long-wave radiant energy from	EPA	United States Environmental Protection Agency						
to long-wave (infrared) radiation, thus preventing long-wave radiant energy from	Generation							
tendency to warm the planet's surface.	GHG	to long-wave (infrared) radiation, thus preventing long-wave radiant energy from leaving Earth's atmosphere. The net effect is a trapping of absorbed radiation and a						
gpf Gallons per flush	gpf	Gallons per flush						





gpm	Gallon per minute
HID	High intensity discharge: high-output lighting lamps such as high-pressure sodium, metal halide, and mercury vapor.
hp	Horsepower
HPS	High-pressure sodium: a type of HID lamp.
HSPF	Heating seasonal performance factor: a measure of efficiency typically applied to heat pumps. Heating energy provided divided by seasonal energy input.
HVAC	Heating, ventilating, and air conditioning
IHP 2014	US DOE Integral Horsepower rule. The current ruling regarding required electric motor efficiency.
IPLV	Integrated part load value: a measure of the part load efficiency usually applied to chillers.
kBtu	One thousand British thermal units.
kW	Kilowatt: equal to 1,000 Watts.
kWh	Kilowatt-hour: 1,000 Watts of power expended over one hour.
LED	Light emitting diode: a high-efficiency source of light with a long lamp life.
LGEA	Local Government Energy Audit
Load	The total power a building or system is using at any given time.
Measure	A single activity, or installation of a single type of equipment, that is implemented in a building system to reduce total energy consumption.
МН	Metal halide: a type of HID lamp.
MBh	Thousand Btu per hour
MBtu	One thousand British thermal units
MMBtu	One million British thermal units
MV	Mercury Vapor: a type of HID lamp.
NJBPU	New Jersey Board of Public Utilities
NJCEP	New Jersey's Clean Energy Program: NJCEP is a statewide program that offers financial incentives, programs and services for New Jersey residents, business owners and local governments to help them save energy, money and the environment.
psig	Pounds per square inch gauge.
Plug Load	Refers to the amount of power used in a space by products that are powered by means of an ordinary AC plug.
PV	Photovoltaic: refers to an electronic device capable of converting incident light directly into electricity (direct current).





SEER	Seasonal energy efficiency ratio: a measure of efficiency in terms of annual cooling energy provided divided by total electric input.
SEP	Statement of energy performance: a summary document from the ENERGY STAR® Portfolio Manager®.
Simple Payback	The amount of time needed to recoup the funds expended in an investment or to reach the break-even point between investment and savings.
SREC	Solar renewable energy credit: a credit you can earn from the state for energy produced from a photovoltaic array.
T5, T8, T12	A reference to a linear lamp diameter. The number represents increments of $1/8^{\text{th}}$ of an inch.
Temperature Setpoint	The temperature at which a temperature regulating device (thermostat, for example) has been set.
therm	100,000 Btu. Typically used as a measure of natural gas consumption.
tons	A unit of cooling capacity equal to 12,000 Btu/hr.
Turnkey	Provision of a complete product or service that is ready for immediate use
VAV	Variable air volume
VFD	Variable frequency drive: a controller used to vary the speed of an electric motor.
WaterSense™	The symbol for water efficiency. The WaterSense™ program is managed by the EPA.
Watt (W)	Unit of power commonly used to measure electricity use.

Appendix B: LGEA ECM Comparison	

50 | Page

Barnegat Township School District - Energy Savings Plan

The ECMs identified in the LGEAs are tabulated below. Each table identifies whether the ECM has been included in the ESP. For the measures where "No" is selected, there is an explanation below the table is provided of why it was not included.

Table 1: Collins LGEA ECMs

ECM No.	ECM Description	In ESP (Y/N)
ECM-1	Retrofit Fixtures with LED Lamps	N*
ECM-2	Install Occupancy Sensor Lighting Controls	N*
ECM-3	Install High/Low Lighting Controls	N*
ECM-4	Install VFDs on Constant Volume (CV) Fans	N*
ECM-5	Install High Efficiency Air Conditioning Units	N*
ECM-6	Install High Efficiency Gas-Fired Water Heater	N*
ECM-7	Install Low-Flow DHW Devices	Y*

^{*}ECM-1, 2, & 3: A lighting upgrade to LED was already completed in Collins prior to the IGA. The school maintenance staff replaced fluorescent fixtures with LED.

Table 2: High School LGEA ECMs

ECM No.	ECM Description	In ESP (Y/N)
ECM-1	Install LED Fixtures	Υ
ECM-2	Retrofit Fluorescent Fixtures with LED Lamps and Drivers	Y
ECM-3	Retrofit Fixtures with LED Lamps	Y
ECM-4	Install Occupancy Sensor Lighting Controls	N*
ECM-5	Premium Efficiency Motors	N*
ECM-6	Install VFDs on Constant Volume (CV) Fans	Y
ECM-7	Install VFDs on Chilled Water Pumps	N*
ECM-8	Install High Efficiency Air Conditioning Units	N*
ECM-9	Install High Efficiency PTAC/PTHP	N*
ECM-10	Install High Efficiency Chillers	Y
ECM-11	Install High Efficiency Furnaces	N*
ECM-12	Install High Efficiency Unit Heaters	N*
ECM-13	Install Low-Flow DHW Devices	Y
ECM-14	Vending Machine Control	Y

^{*}ECM-4: Occupancy sensors were not recommended because they were already found throughout the school.

^{*}ECM-4: CHA reached out to the unit manufacturer and the existing units are not able to properly modulate cooling capacity to be compatible with variable fan speed / variable airflow.

^{*}ECM-5: This was not included due to poor payback.

^{*}ECM-6: This was not included due to poor payback.

^{*}ECM-5: Premium efficiency motors were not included due to poor payback.

^{*}ECM-7: Chilled water pumps are already on VFDs.

^{*}ECM-8: AHU replacement is not included due to poor payback. VFD upgrades on AHU fans where appropriate are proposed instead.

^{*}ECM-9: This was not included due to poor payback.

^{*}ECM-11: This was not included due to poor payback.

^{*}ECM-12: This was not included due to poor payback.

Table 3: Horbelt LGEA ECMs

ECM No.	ECM Description	In ESP (Y/N)
ECM-1	Install LED Fixtures	Υ
ECM-2	Retrofit Fixtures with LED Lamps	Y
ECM-3	Install Occupancy Sensor Lighting Controls	Υ
ECM-4	Install High/Low Lighting Controls	N*
ECM-5	Install VFDs on Constant Volume (CV) Fans	N*
ECM-6	Install High Efficiency Heat Pumps	Y
ECM-7	Install High Efficiency Hot Water Boilers	N*
ECM-8	Vending Machine Control	Y

^{*}ECM-4: High/Low controls were not included; only occupancy sensors were considered for the lighting upgrade.

Table 4: Donahue LGEA ECMs

ECM No.	ECM Description	In ESP (Y/N)
ECM-1	Install LED Fixtures	Y
ECM-2	Retrofit Fixtures with LED Lamps	Y
ECM-3	Install Occupancy Sensor Lighting Controls	Y
ECM-4	Install VFDs on Constant Volume (CV) Fans	N*
ECM-5	Install High Efficiency Gas-Fired Water Heater	Y
ECM-6	Install Low-Flow DHW Devices	Y
ECM-7	Vending Machine Control	Y

^{*}ECM-4: This was not include due to poor payback.

Table 5: Dunfee LGEA ECMs

ECM No.	ECM Description	In ESP (Y/N)
ECM-1	Retrofit Fixtures with LED Lamps	Υ
ECM-2	Install Occupancy Sensor Lighting Controls	Y
ECM-3	Install High/Low Lighting Controls	N*
ECM-4	Install VFDs on Constant Volume (CV) Fans	Y
ECM-5	Install VFDs on Heating Water Pumps	N*
ECM-6	Install High Efficiency Air Conditioning Units	N*
ECM-7	Install High Efficiency Furnaces	N*
ECM-8	Install High Efficiency Gas-Fired Water Heater	Y
ECM-9	Install Low-Flow DHW Devices	Y
ECM-10	Vending Machine Control	Y

^{*}ECM-3: High/Low controls were not considered as occupancy sensors were recommended instead.

^{*}ECM-5: This measure is not included due to poor payback.

^{*}ECM-7: This measure is not included due to feedback from facility staff and poor payback.

^{*}ECM-5: This was not included due to poor payback.

^{*}ECM-6: This was not included due to poor payback.

^{*}ECM-7: This was not included due to poor payback.

^{*}ECM-10: This was not included due to poor payback.

Table 6: Brackman LGEA ECMs

ECM No.	ECM Description	In ESP (Y/N)
ECM-1	Install LED Fixtures	Y
ECM-2	Retrofit Fixtures with LED Lamps	Y
ECM-3	Install Occupancy Sensor Lighting Controls	Y
ECM-4	Install High/Low Lighting Controls	N*
ECM-5	Install VFDs on Constant Volume (CV) Fans	Y
ECM-6	Install VFDs on Heating Water Pumps	Y
ECM-7	Install High Efficiency Air Conditioning Units	N*
ECM-8	Install High Efficiency Heat Pumps	Y*
ECM-9	Install High Efficiency Furnaces	N*
ECM-10	Install High Efficiency Gas-Fired Water Heater	Y
ECM-11	Install Low-Flow DHW Devices	Y
ECM-12	Refrigerator/Freezer Case Electrically Commutated Motors	Y
ECM-13	Refrigeration Controls	Y
ECM-14	Vending Machine Control	Y

^{*}ECM-4: High/Low controls were not included; only occupancy sensors were considered for the lighting upgrade. *ECM-7: This measure is not included due to poor payback. Included supply fan VFDs and demand control ventilation (DCV) instead.

^{*}ECM-8: This measure is included as an alternate.

^{*}ECM-9: Rooftop unit replacement would not have an economical payback.

Appendix C: Utility Analysis

Barnegat Township School District - Energy Savings Plan

51 | Page

Barnegat Schools Utility Summary

UTILITY COSTS & CONSUMPTION														
	Existing So	lar F	PPA	Exist. JCP&L Utility			Total Electric Data		Natural Gas Data		Water/Sewer Data		Total Utility	Total Utility
	Consumption (kWh)		Cost (\$)	Consumption (kWh)		Cost (\$)	Consumption (kWh)	Cost (\$)	Consumption (Therms)	Cost (\$)	Usage (kGal)	Cost (\$)	Cost w/ PPA (\$)	Cost w/out PPA
Barnegat Township High School	454,417	\$	57,211	2,214,489	\$	252,824	2,668,905	\$ 310,035	40,643	\$43,924	2,786	\$16,526	\$370,484	\$ 313,273
Russell O. Brackman Middle School	462,149	\$	58,185	1,336,622	\$	156,762	1,798,771	\$214,947	16,296	\$17,487	610	\$4,198	\$236,632	\$178,447
Joseph T. Donahue Elementary School	239,023	\$	30,093	581,852	\$	67,975	820,874	\$98,068	12,963	\$14,566	556	\$3,360	\$115,994	\$85,901
Lillian M. Dunfee Elementary School	224,121	\$	28,217	370,944	\$	47,724	595,065	\$75,941	16,994	\$17,628	421	\$2,162	\$95,730	\$67,513
Cecil S. Collins Elementary School and Board Offices	350,556	\$	44,135	368,235	\$	52,708	718,791	\$96,843	23,667	\$24,937	590	\$3,934	\$125,713	\$81,578
Robert L. Horbelt Elementary School	45,812	\$	5,768	693,299	\$	80,035	739,111	\$85,803	12,637	\$14,175	334	\$1,954	\$101,931	\$96,163
Totals	1,776,079	\$ 2	223,608	5,565,440	\$	658,027	7,341,518	\$881,636	123,200	\$132,715	5,297	\$32,133	\$1,046,484	\$822,875

High School

Summary A/C: 200000053963

Font is red are estimated. (Bills were not available)

Electrical Use
Delivery: JCP&L

East Coast Power & Gas of NJ; Plymouth Rock

Account #: 100087783716

Supply: Energy

Month	Year ('##)	Period Start Date	Period End Date	Days	Season	On Peak Demand (kW)	Energy Use (kWh)	Blended Rate \$/kWh	Consumption Rate \$/kWh	Demand Rat \$/kW	e Delivery kWh Cost	Supplier kWh Cost	Total Consumption Cost (\$)	Demand Cost (\$)	Total Cost
Feb	2019	02/21/19	03/22/19	30	Win	414.7	142,994	\$ 0.112	\$ 0.094	\$ 6.11	9 \$ 2,314	\$ 11,169	\$ 13,484	\$ 2,537	\$ 16,021
Mar	2019	03/23/19	04/22/19	31	Win	397.4	122,169	\$ 0.115	\$ 0.095	\$ 6.11	2 \$ 2,073	\$ 9,543	\$ 11,616	\$ 2,429	\$ 14,045
Apr	2019	04/23/19	05/22/19	30	Win	509.8	145,481	\$ 0.119	\$ 0.097	\$ 6.12	1 \$ 2,772	\$ 11,364	\$ 14,136	\$ 3,120	\$ 17,256
May	2019	05/23/19	06/20/19	29	Spr	607.7	189,962	\$ 0.115	\$ 0.094	\$ 6.52	1 \$ 3,066	\$ 14,837	\$ 17,903	\$ 3,963	\$ 21,866
Jul	2019	06/21/19	07/22/19	32	Spr	545.8	224,196	\$ 0.114	\$ 0.098	\$ 6.50	9 \$ 4,466	\$ 17,510	\$ 21,977	\$ 3,552	\$ 25,529
Jul	2019	07/23/19	08/21/19	30	Spr	701.3	269,922	\$ 0.115	\$ 0.098	\$ 6.53	5 \$ 5,361	\$ 21,081	\$ 26,442	\$ 4,583	\$ 31,025
Aug	2019	08/22/19	09/20/19	30	Sum	613.4	252,815	\$ 0.114	\$ 0.098	\$ 6.52	2 \$ 5,026	\$ 19,745	\$ 24,771	\$ 4,001	\$ 28,772
Oct	2019	09/21/19	10/23/19	33	Sum	633.6	236,481	\$ 0.114	\$ 0.098	\$ 6.07	3 \$ 4,702	\$ 18,470	\$ 23,171	\$ 3,848	\$ 27,019
Oct	2019	10/24/19	11/21/19	29	Sum	517.0	157,874	\$ 0.118	\$ 0.098	\$ 6.05	1 \$ 3,188	\$ 12,331	\$ 15,519	\$ 3,128	\$ 18,647
Nov	2019	11/22/19	12/20/19	29	Fall	419.0	154,275	\$ 0.112	\$ 0.096	\$ 6.02	3 \$ 2,776	\$ 12,050	\$ 14,826	\$ 2,524	\$ 17,350
Jan	2020	12/21/19	01/21/20	32	Fall	419.0	160,788	\$ 0.110	\$ 0.095	\$ 6.02	3 \$ 2,661	\$ 12,559	\$ 15,220	\$ 2,524	\$ 17,743
Feb	2020	01/22/20	02/22/20	32	Fall	419.0	157,532	\$ 0.111	\$ 0.095	\$ 6.02	3 \$ 2,718	\$ 12,305	\$ 15,023	\$ 2,524	\$ 17,550
TOTAL	Last 12 Months			367		701.3	2,214,489	\$ 0.114	\$ 0.097	\$ 6.21	9 \$ 41,123	\$ 172,965	\$ 214,088	\$ 38,732	\$ 252,824

Natural Gas Delivery: New Jersey Natural Gas

Supply: UGI Energy Services LLC							22-0009-2074-20				
Month	Year ('##)	Period Start Date	Period End Date	Days	Season	Energy Use, CCF	Energy Use, Therms	Energy Cost \$/Therm	Delivery Charge	Supply Charge	Total Cost
Mar	2019	03/07/19	04/05/19	29	Spring	5,808	6,922	\$ 0.91	\$ 3,483.20	\$ 2,826.35	\$ 6,309.55
May	2019	04/05/19	05/08/19	33	Spring	1,160	1,385	\$ 1.25	\$ 1,186.85	\$ 543.65	\$ 1,730.50
May	2019	05/08/19	06/07/19	30	Summer	460	548	\$ 1.90	\$ 835.76	\$ 206.47	\$ 1,042.23
Jul	2019	06/07/19	07/09/19	32	Summer	379	450	\$ 2.15	\$ 794.74	\$ 172.81	\$ 967.55
Jul	2019	07/09/19	08/05/19	27	Summer	281	333	\$ 2.58	\$ 745.72	\$ 115.61	\$ 861.33
Aug	2019	08/05/19	09/03/19	29	Fall	311	370	\$ 2.39	\$ 761.09	\$ 122.48	\$ 883.57
Sep	2019	09/03/19	10/01/19	28	Fall	386	459	\$ 2.81	\$ 1,130.92	\$ 157.13	\$ 1,288.05
Nov	2019	10/01/19	11/01/19	31	Fall	870	1,036	\$ 1.72	\$ 1,412.41	\$ 375.20	\$ 1,787.61
Dec	2019	11/01/19	12/05/19	34	Winter	6,054	7,219	\$ 1.00	\$ 4,504.44	\$ 2,744.98	\$ 7,249.42
Jan	2020	12/05/19	01/07/20	33	Winter	6,669	7,915	\$ 0.99	\$ 4,930.08	\$ 2,900.55	\$ 7,830.63
Jan	2020	01/07/20	01/31/20	24	Winter	5,255	6,262	\$ 1.00	\$ 3,912.32	\$ 2,328.80	\$ 6,241.12
Mar	2020	02/01/20	03/04/20	32	Winter	6,515	7,744	\$ 1.00	\$ 4,852.18	\$ 2,879.83	\$ 7,732.01
TOTAL	st 12 Mont	hs		362			40,644	\$ 1.08	\$ 28,549.71	\$ 15,373.86	\$ 43,923.57

**Barnegat ISD gets quarterly bills for their water usage. Charges for their water are shown from their water bills in the photo below.

estimated.
(Rills were not

Water/Sewer Use

Account 785071-5

Month	Year ('##)	Period Start Date	Period End Date	Days	Season	Consumption (kGal)	Water Rate (\$/kGal)	Sewer Rate (\$/kGal)	W	ater Cost	Sewer Cost	To	otal Cost
Dec	2018	10/01/18	12/31/18	92		420	\$ 5.939		\$	2,495	\$ 6,420	\$	8,915
Mar	2019	01/01/19	03/31/19	90		285	\$ 5.949		\$	1,695	\$ 6,420	\$	8,115
Jun	2019	04/01/19	06/30/19	91		652	\$ 5.933		\$	3,868	\$ 6,420	\$	10,288
Sep	2019	07/01/19	09/30/19	92		989	\$ 5.928		\$	5,863	\$ 6,420	\$	12,283
Dec	2019	10/01/19	12/31/19	92		860	\$ 5.929		\$	5,099	\$ 6,420	\$	11,519
TOTAL	Last 12 Months			365		2,786	\$ 5.932			16,526	25,680		42,206

Summary A/C: 200000053963

Font is red are estimated. (Bills were not available)

Electrical Use
Delivery: JCP&L

Dec

Jan

Feb

TOTAL

East Coast Power
Supply: & Gas of NJ

2019

2019

2020

Last 12 Months

11/26/19

12/27/19

01/25/20

12/26/19

01/24/20

02/25/20

31

29

32

364

Win

Win

Win

403.2

425.7

422.5

431.1

125,361

141,682 \$

151,944 \$

1,336,622 \$

Account #: 100019012598

Juppiy.															
Month	Year ('##)	Period Start Date	Period End Date	Days	Season	On Peak Demand (kW)	Energy Use (kWh)	Blended Rate \$/kWh	Consumption Rate \$/kWh	Demand Rate \$/kW	Delivery kWh Cost	Supplier kWh Cost	Total Consumption Cost (\$)	Demand Cost (\$)	Total Cost
Feb	2019	01/26/19	02/26/19	32	Win	452.4	157,358	\$ 0.112	\$ 0.094	\$ 6.131	\$ 2,523	\$ 12,288	\$ 14,811	\$ 2,774	\$ 17,585
Mar	2019	02/27/19	03/27/19	29	Win	373.5	113,958	\$ 0.114	\$ 0.094	\$ 6.102	\$ 3,844	\$ 6,899	\$ 10,743	\$ 2,279	\$ 13,023
Apr	2019	03/28/19	04/25/19	29	Spr	347.6	78,666	\$ 0.123	\$ 0.096	\$ 6.090	\$ 1,385	\$ 6,143	\$ 7,528	\$ 2,117	\$ 9,645
May	2019	04/26/19	05/28/19	33	Spr	351.4	99,890	\$ 0.118	\$ 0.096	\$ 6.050	\$ 1,829	\$ 7,800	\$ 9,630	\$ 2,126	\$ 11,756
Jun	2019	05/29/19	06/26/19	29	Sum	363.4	94,506	\$ 0.120	\$ 0.096	\$ 6.448	\$ 1,647	\$ 7,380	\$ 9,027	\$ 2,343	\$ 11,370
Jul	2019	06/27/19	07/26/19	30	Sum	307.6	100,336	\$ 0.118	\$ 0.098	\$ 6.414	\$ 2,028	\$ 7,835	\$ 9,863	\$ 1,973	\$ 11,836
Aug	2019	07/27/19	08/27/19	32	Fall	314.8	124,086	\$ 0.114	\$ 0.098	\$ 6.419	\$ 2,613	\$ 9,570	\$ 12,183	\$ 2,021	\$ 14,203
Sep	2019	08/28/19	09/25/19	29	Fall	431.1	96,874	\$ 0.127	\$ 0.098	\$ 6.476	\$ 1,960	\$ 7,565	\$ 9,525	\$ 2,792	\$ 12,317
Oct	2019	09/26/19	10/28/19	33	Fall	364.3	100,280	\$ 0.120	\$ 0.098	\$ 6.001	\$ 2,022	\$ 7,831	\$ 9,853	\$ 2,186	\$ 12,039
Nov	2019	10/29/19	11/25/19	28	Win	380.7	109,039	\$ 0.119	\$ 0.098	\$ 6.008	\$ 2,214	\$ 8,515	\$ 10,729	\$ 2,287	\$ 13,016

0.117

0.113

0.111 \$

0.117 \$

0.096

0.094

0.094

0.097 \$

6.182

6.024

6.025 \$

6.187 \$

2,446

2,471

2,334 \$

26,794 \$

12,230

14,337

129,035 \$

13,388 \$

9,784

11,054

11,865

102,242 \$

2,493

2,565

2,545

27,727 \$

14,723

15,952

16,882

156,762

Natural Gas Delivery: New Jersey Natural Gas

Supply: UGI Energy Ser	vices LLC					Account #:	07-5080-0190-29				
Month	Year ('##)	Period Start Date	Period End Date	Days	Season	Energy Use, CCF	Energy Use, Therms	Energy Cost \$/Therm	Delivery Charge	Supply Charge	Total Cost
Mar	2019	03/04/19	04/01/19	28	Spring	2,339	2,788	\$ 0.93	\$ 1,450.29	\$ 1,138.47	\$ 2,588.76
May	2019	04/01/19	05/03/19	32	Spring	1,509	1,801	\$ 0.98	\$ 1,050.02	\$ 707.67	\$ 1,757.69
Jun	2019	05/03/19	06/05/19	33	Summer	472	562	\$ 1.32	\$ 530.14	\$ 211.64	\$ 741.78
Jun	2019	06/05/19	07/03/19	28	Summer	125	148	\$ 2.79	\$ 356.55	\$ 57.23	\$ 413.78
Jul	2019	07/03/19	08/02/19	30	Summer	103	122	\$ 3.18	\$ 345.52	\$ 42.50	\$ 388.02
Aug	2019	08/02/19	08/30/19	28	Fall	106	126	\$ 3.09	\$ 347.16	\$ 41.80	\$ 388.96
Aug	2019	08/30/19	09/26/19	27	Fall	141	168	\$ 2.52	\$ 364.68	\$ 57.42	\$ 422.10
Sep	2019	09/26/19	11/01/19	36	Fall	534	636	\$ 1.37	\$ 641.33	\$ 230.16	\$ 871.49
Nov	2019	11/01/19	11/27/19	26	Winter	1,228	1,464	\$ 1.07	\$ 1,015.13	\$ 556.74	\$ 1,571.87
Nov	2019	11/27/19	01/03/20	37	Winter	2,710	3,216	\$ 0.98	\$ 1,968.87	\$ 1,178.25	\$ 3,147.12
Jan	2020	01/03/20	01/30/20	27	Winter	2,157	2,571	\$ 0.99	\$ 1,590.57	\$ 955.94	\$ 2,546.51
Jan	2020	01/30/20	03/02/20	32	Winter	2,266	2,694	\$ 0.98	\$ 1,646.85	\$ 1,001.86	\$ 2,648.71
TOTAL	st 12 Mont	hs		364			16,296	\$ 1.07	\$ 11,307.11	\$ 6,179.68	\$ 17,486.79

**Barnegat ISD gets quarterly bills for their water usage. Charges for their water are shown from their water bills in the photo below.

estimated.
(Rills were not

Water/Sewer Use

785071-6

Month	Year ('##)	Period Start Date	Period End Date	Days	Consumption (kGal)	Water Rate (\$/kGal)	Sewer Rate (\$/kGal)	Wat	ter Cost	Sewer Cost	Total Cost
Dec	2018	10/01/18	12/31/18	92	232	\$ 6.48		\$	1,502	\$ 3,745	\$ 5,247
Mar	2019	01/01/19	03/31/19	90	180	\$ 6.64		\$	1,195	\$ 3,745	\$ 4,940
Jun	2019	04/01/19	06/30/19	91	200	\$ 6.56		\$	1,313	\$ 3,745	\$ 5,058
Sep	2019	07/01/19	09/30/19	92	52	\$ 9.77		\$	508	\$ 3,745	\$ 4,253
Dec	2019	10/01/19	12/31/19	92	178	\$ 6.64		\$	1,183	\$ 3,745	\$ 4,928
TOTAL	Last 12 Months		_	365	610	\$ 6.88		\$	4,198	\$ 14,980	\$ 19,178

Summary A/C: 200000053963

Font is red are estimated. (Bills were not available)

Electrical Use
Delivery: JCP&L

East Coast Power
Supply: & Gas of NJ

Account #: 100019012465

Juppiy.	0. 000 0																
Month	Year ('##)	Period Start Date	Period End Date	Days	Season	On Peak Demand (kW)	Energy Use (kWh)	Blended Rate \$/kWh	Consumption Rate \$/kWh	Demand Ra \$/kW	ite	Delivery kWh Cost	Supplier kWh Cost	Total Consumption Cost (\$)	Demand Cost (\$)	Total Co	ost
Feb	2019	01/26/19	02/26/19	32	Win	102.6	37,134	\$ 0.128	\$ 0.113	\$ 5.6	59	\$ 643	\$ 3,541	\$ 4,184	\$ 581	\$ 4,	,765
Mar	2019	02/27/19	03/27/19	29	Win	96.1	28,142	\$ 0.139	\$ 0.119	\$ 5.6	18	\$ 502	\$ 2,858	\$ 3,360	\$ 540	\$ 3,	,900
Apr	2019	03/28/19	04/25/19	29	Spr	105.3	21,634	\$ 0.149	\$ 0.121	\$ 5.6	75	\$ 426	\$ 2,200	\$ 2,626	\$ 598	\$ 3,	,224
May	2019	04/26/19	05/28/19	33	Spr	133.4	21,921	\$ 0.157	\$ 0.122	\$ 5.7	61	\$ 452	\$ 2,226	\$ 2,678	\$ 768	\$ 3,	,446
Jun	2019	05/29/19	06/26/19	29	Sum	125.3	24,931	\$ 0.143	\$ 0.112	\$ 6.1	01	\$ 483	\$ 2,322	\$ 2,804	\$ 764	\$ 3,	,569
Jul	2019	06/27/19	07/26/19	30	Sum	136.6	27,975	\$ 0.155	\$ 0.125	\$ 6.1	45	\$ 613	\$ 2,881	\$ 3,494	\$ 839	\$ 4,	,334
Aug	2019	07/27/19	08/27/19	32	Fall	127.4	28,853	\$ 0.148	\$ 0.121	\$ 6.1	10	\$ 630	\$ 2,859	\$ 3,489	\$ 778	\$ 4,	,268
Sep	2019	08/28/19	09/25/19	29	Fall	135.0	26,280	\$ 0.153	\$ 0.121	\$ 6.1	39	\$ 580	\$ 2,604	\$ 3,184	\$ 829	\$ 4,	,013
Oct	2019	09/26/19	10/28/19	33	Fall	136.1	31,419	\$ 0.145	\$ 0.121	\$ 5.7	17	\$ 676	\$ 3,114	\$ 3,789	\$ 778	\$ 4,	,567
Nov	2019	10/29/19	11/26/19	29	Win	112.3	35,781	\$ 0.138	\$ 0.121	\$ 5.6	21	\$ 768	\$ 3,546	\$ 4,314	\$ 631	\$ 4,	,945
Dec	2019	11/27/19	12/26/19	30	Win	115.6	38,052	\$ 0.143	\$ 0.119	\$ 5.8	17	\$ 1,009	\$ 3,771	\$ 4,780	\$ 672	\$ 5,	,452
Jan	2019	12/27/19	01/24/20	29	Win	118.8	40,323	\$ 0.133	\$ 0.117	\$ 5.6	51	\$ 705	\$ 3,996	\$ 4,701	\$ 671	\$ 5,	,373
Feb	2020	01/25/20	02/25/20	32	Win	110.7	42,924	\$ 0.131	\$ 0.116	\$ 5.6	13	\$ 742	\$ 4,254	\$ 4,996	\$ 621	\$ 5,	,617
TOTAL	Last 12 Months			364		136.6	368,235	\$ 0.143	\$ 0.120	\$ 5.8	30	\$ 7,585	\$ 36,632	\$ 44,217	\$ 8,491	\$ 52,	,708

Collins

Natural Gas Delivery: New Jersey Natural Gas

Supply: UGI Energ	y Services LLC					Account #:	22-0006-1134-44				
Month	Year ('##)	Period Start Date	Period End Date	Days	Season	Energy Use, CCF	Energy Use, Therms	Energy Cost \$/Therm	Delivery Charge	Supply Charge	Total Cost
Mar	2019	03/04/19	04/01/19	28	Spring	3,619	4,313	\$ 0.91	\$ 2,160.76	\$ 1,761.13	\$ 3,921.89
May	2019	04/01/19	05/03/19	32	Spring	1,305	1,558	\$ 1.05	\$ 1,025.70	\$ 611.80	\$ 1,637.50
Jun	2019	05/03/19	06/05/19	33	Summer	236	281	\$ 2.12	\$ 490.05	\$ 106.01	\$ 596.06
Jun	2019	06/05/19	07/03/19	28	Summer	90	107	\$ 4.29	\$ 416.96	\$ 41.04	\$ 458.00
Jul	2019	07/03/19	08/02/19	30	Summer	60	71	\$ 6.00	\$ 401.97	\$ 24.82	\$ 426.79
Aug	2019	08/02/19	08/30/19	28	Fall	65	77	\$ 5.56	\$ 404.55	\$ 25.60	\$ 430.15
Aug	2019	08/30/19	09/26/19	27	Fall	171	203	\$ 2.75	\$ 489.91	\$ 69.84	\$ 559.75
Sep	2019	09/26/19	11/01/19	36	Fall	656	781	\$ 1.44	\$ 838.92	\$ 282.99	\$ 1,121.91
Nov	2019	11/01/19	11/27/19	26	Winter	2,476	2,953	\$ 1.00	\$ 1,824.51	\$ 1,122.80	\$ 2,947.31
Nov	2019	11/27/19	01/03/20	37	Winter	4,384	5,203	\$ 0.95	\$ 3,061.29	\$ 1,906.53	\$ 4,967.82
Jan	2020	01/03/20	01/30/20	27	Winter	3,290	3,921	\$ 0.97	\$ 2,361.30	\$ 1,458.14	\$ 3,819.44
Jan	2020	01/30/20	03/02/20	32	Winter	3,532	4,198	\$ 0.96	\$ 2,488.31	\$ 1,561.64	\$ 4,049.95
TOTAL	Last 12 Months			364			23,667	\$ 1.05	\$ 15,964.23	\$ 8,972.34	\$ 24,936.57

Collins

**Barnegat ISD gets quarterly bills for their water usage. Charges for their water are shown from their water bills in the photo below.

estimated.
(Rills were not

Water/Sewer Use

Account 785071-3

						763071-3						
Month	Year ('##)	Period Start Date	Period End Date	Days	Season	Consumption (kGal)	Water Rate (\$/kGal)	Sewer Rate (\$/kGal)	Water Cost	Sewer Cost	Tota	al Cost
Dec	2018	10/01/18	12/31/18	92		148	6.5190		\$ 965	\$ 3,317	\$	4,282
Mar	2019	01/01/19	03/31/19	90		186	6.3966		\$ 1,190	\$ 3,317	\$	4,507
Jun	2019	04/01/19	06/30/19	91		190	6.3866		\$ 1,213	\$ 3,317	\$	4,530
Sep	2019	07/01/19	09/30/19	92		46	9.7215		\$ 447	\$ 3,317	\$	3,764
Dec	2019	10/01/19	12/31/19	92		168	6.4477		\$ 1,083	\$ 3,317	\$	4,400
TOTAL	Last 12 Months			365		590	6.6672		3,934	13,268		17,202

Dunfee

Summary A/C: 200000053963

Font is red are estimated. (Bills were not available)

Electrical Use
Delivery: JCP&L

East Coast Power
Supply: & Gas of NJ

Account #: 100019381894

Juppiy.															
Month	Year ('##)	Period Start Date	Period End Date	Days	Season	On Peak Demand (kW)	Energy Use (kWh)	Blended Rate \$/kWh	Consumption Rate \$/kWh	Demand Rate \$/kW	Delivery kWh Cost	Supplier kWh Cost	Total Consumption Cost (\$)	Demand Cost (\$)	Total Cost
Feb	2019	01/26/19	02/26/19	32	Win	182.2	50,846	\$ 0.116	\$ 0.095	\$ 5.926	\$ 857	\$ 3,971	\$ 4,828	\$ 1,080	\$ 5,908
Mar	2019	02/27/19	03/27/19	29	Win	176.4	35,159	\$ 0.125	\$ 0.095	\$ 5.915	\$ 611	\$ 2,747	\$ 3,358	\$ 1,043	\$ 4,401
Apr	2019	03/28/19	04/25/19	29	Spr	157.7	24,607	\$ 0.135	\$ 0.097	\$ 5.872	\$ 476	\$ 1,922	\$ 2,398	\$ 926	\$ 3,324
May	2019	04/26/19	05/28/19	33	Spr	149.4	25,304	\$ 0.133	\$ 0.098	\$ 5.809	\$ 510	\$ 1,976	\$ 2,486	\$ 868	\$ 3,354
Jun	2019	05/29/19	06/26/19	29	Sum	150.5	25,749	\$ 0.134	\$ 0.097	\$ 6.190	\$ 496	\$ 2,011	\$ 2,507	\$ 932	\$ 3,438
Jul	2019	06/27/19	07/26/19	30	Sum	128.5	23,056	\$ 0.135	\$ 0.101	\$ 6.114	\$ 517	\$ 1,801	\$ 2,318	\$ 786	\$ 3,104
Aug	2019	07/27/19	08/27/19	32	Fall	123.8	26,440	\$ 0.129	\$ 0.100	\$ 6.094	\$ 583	\$ 2,065	\$ 2,648	\$ 754	\$ 3,402
Sep	2019	08/28/19	09/25/19	29	Fall	156.2	25,781	\$ 0.138	\$ 0.100	\$ 6.206	\$ 570	\$ 2,013	\$ 2,583	\$ 969	\$ 3,552
Oct	2019	09/26/19	10/28/19	33	Fall	148.7	32,823	\$ 0.126	\$ 0.100	\$ 5.755	\$ 703	\$ 2,563	\$ 3,266	\$ 856	\$ 4,122
Nov	2019	10/29/19	11/25/19	28	Win	175.0	31,565	\$ 0.132	\$ 0.100	\$ 5.817	\$ 684	\$ 2,465	\$ 3,149	\$ 1,018	\$ 4,167
Dec	2019	11/26/19	12/26/19	31	Win	183.9	35,128	\$ 0.129	\$ 0.098	\$ 5.948	\$ 683	\$ 2,743	\$ 3,426	\$ 1,094	\$ 4,520
Jan	2019	12/27/19	01/24/20	29	Win	192.8	38,691	\$ 0.125	\$ 0.096	\$ 5.844	\$ 679	\$ 3,021	\$ 3,700	\$ 1,127	\$ 4,827
Feb	2020	01/25/20	02/25/20	32	Win	183.2	46,641	\$ 0.118	\$ 0.095	\$ 5.833	\$ 801	\$ 3,642	\$ 4,443	\$ 1,069	\$ 5,512
TOTAL	Last 12 Months			364		192.8	370,944	\$ 0.129	\$ 0.098	\$ 5.950	\$ 7,314	\$ 28,969	\$ 36,283	\$ 11,441	\$ 47,724

Natural Gas Delivery: New Jersey Natural Gas

Supply: UGI Energy Ser	vices LLC					Account #:	22-0008-6868	3-52			
Month	Year ('##)	Period Start Date	Period End Date	Days	Season	Energy Use, CCF	Energy Use, Therms	Energy Cost \$/Therm	Delivery Charge	Supply Charge	Total Cost
Mar	2019	03/06/19	04/03/19	28	Spring	2,258	2,691	\$ 0.93	\$ 1,392.78	\$ 1,098.85	\$ 2,491.63
May	2019	04/03/19	05/07/19	34	Spring	1,257	1,500	\$ 1.00	\$ 905.02	\$ 589.47	\$ 1,494.49
May	2019	05/07/19	06/04/19	28	Summer	474	565	\$ 1.28	\$ 512.35	\$ 212.75	\$ 725.10
Jul	2019	06/04/19	07/08/19	34	Summer	240	285	\$ 1.77	\$ 395.07	\$ 109.18	\$ 504.25
Jul	2019	07/08/19	08/05/19	28	Summer	180	213	\$ 2.06	\$ 365.05	\$ 74.13	\$ 439.18
Aug	2019	08/05/19	08/29/19	24	Fall	97	115	\$ 2.66	\$ 268.79	\$ 38.24	\$ 307.03
Aug	2019	08/29/19	09/27/19	29	Fall	39	46	\$ 6.63	\$ 291.06	\$ 16.12	\$ 307.18
Sep	2019	09/27/19	11/01/19	35	Fall	537	640	\$ 1.25	\$ 565.08	\$ 231.58	\$ 796.66
Dec	2019	11/01/19	12/02/19	31	Winter	2,155	2,570	\$ 0.97	\$ 1,516.38	\$ 977.10	\$ 2,493.48
Jan	2020	12/02/19	01/06/20	35	Winter	2,786	3,318	\$ 0.96	\$ 1,913.85	\$ 1,276.29	\$ 3,190.14
Jan	2020	01/06/20	01/31/20	25	Winter	2,030	2,419	\$ 0.96	\$ 1,412.98	\$ 899.81	\$ 2,312.79
Jan	2020	01/31/20	03/02/20	31	Winter	2,214	2,632	\$ 0.97	\$ 1,586.93	\$ 978.89	\$ 2,565.82
TOTAL	st 12 Mont	:hs		362			16,994	\$ 1.04	\$ 11,125.34	\$ 6,502.41	\$ 17,627.75

Dunfee

**Barnegat ISD gets quarterly bills for their water usage. Charges for their water are shown from their water bills in the photo below.

estimated.
(Rills were not

Water/Sewer Use

					Account	785071-1								
Month	Year ('##)	Period Start Date	Period End Date	Days	Season	Consumption (kGal)	Water Rate (\$/kGal)	Sewer Rate (\$/kGal)	Wate	Cost	Sewe	er Cost	Tot	tal Cost
Dec	2018	10/01/18	12/31/18	92		128	\$ 5.05		\$	647	\$	1,926	\$	2,573
Mar	2019	01/01/19	03/31/19	90		114	\$ 4.95		\$	564	\$	1,926	\$	2,490
Jun	2019	04/01/19	06/30/19	91		129	\$ 5.06		\$	653	\$	1,926	\$	2,579
Sep	2019	07/01/19	09/30/19	92		37	\$ 5.97		\$	221	\$	1,926	\$	2,147
Dec	2019	10/01/19	12/31/19	92		141	\$ 5.13		\$	724	\$	1,926	\$	2,650
TOTAL	Last 12 Months			365		421	\$ 5.13			2,162		7,704		9,866

Donahue

Summary A/C: 200000053963

Font is red are estimated. (Bills were not available)

Electrical Use
Delivery: JCP&L

East Coast Power & Gas of NJ

Account #: 100076367430

Supply:	& Gas of NJ														
Month	Year ('##)	Period Start Date	Period End Date	Days	Season	On Peak Demand (kW)	Energy Use (kWh)	Blended Rate \$/kWh	Consumption Rate \$/kWh	Demand Rate \$/kW	Delivery kWh Cost	Supplier kWh Cost	Total Consumption Cost (\$)	Demand Cost (\$)	Total Cost
Feb	2019	01/26/19	02/25/19	31	Win	246.7	83,900	\$ 0.112	\$ 0.094	\$ 6.016	\$ 1,274	\$ 6,652	\$ 7,926	\$ 1,484	\$ 9,410
Mar	2019	02/26/19	03/26/19	29	Win	201.3	56,834	\$ 0.116	\$ 0.095	\$ 5.959	\$ 951	\$ 4,438	\$ 5,389	\$ 1,199	\$ 6,589
Apr	2019	03/27/19	04/25/19	30	Spr	170.6	27,146	\$ 0.134	\$ 0.097	\$ 5.902	\$ 518	\$ 2,120	\$ 2,637	\$ 1,007	\$ 3,644
May	2019	04/26/19	05/28/19	33	Spr	144.4	32,888	\$ 0.123	\$ 0.098	\$ 5.796	\$ 644	\$ 2,568	\$ 3,212	\$ 837	\$ 4,049
Jun	2019	05/29/19	06/26/19	29	Sum	132.5	38,361	\$ 0.118	\$ 0.097	\$ 6.130	\$ 707	\$ 2,996	\$ 3,703	\$ 812	\$ 4,515
Jul	2019	06/27/19	07/26/19	30	Sum	148.9	43,920	\$ 0.120	\$ 0.099	\$ 6.185	\$ 925	\$ 3,430	\$ 4,354	\$ 921	\$ 5,275
Aug	2019	07/27/19	08/27/19	32	Fall	156.8	53,007	\$ 0.117	\$ 0.099	\$ 6.207	\$ 1,102	\$ 4,139	\$ 5,242	\$ 973	\$ 6,215
Sep	2019	08/28/19	09/25/19	29	Fall	151.5	45,119	\$ 0.120	\$ 0.099	\$ 6.192	\$ 948	\$ 3,523	\$ 4,472	\$ 938	\$ 5,410
Oct	2019	09/26/19	10/28/19	33	Fall	161.7	43,093	\$ 0.121	\$ 0.099	\$ 5.788	\$ 904	\$ 3,365	\$ 4,269	\$ 936	\$ 5,205
Nov	2019	10/29/19	11/26/19	29	Win	163.4	53,572	\$ 0.118	\$ 0.097	\$ 5.924	\$ 1,194	\$ 4,183	\$ 5,378	\$ 968	\$ 6,345
Dec	2019	11/27/19	12/25/19	29	Win	165.0	64,050	\$ 0.111	\$ 0.098	\$ 5.190	\$ 1,245	\$ 5,002	\$ 6,246	\$ 856	\$ 7,103
Jan	2019	12/26/19	01/24/20	30	Win	164.3	60,425	\$ 0.111	\$ 0.095	\$ 5.794	\$ 1,026	\$ 4,719	\$ 5,745	\$ 952	\$ 6,697
Feb	2020	01/25/20	02/25/20	32	Win	157.0	63,437	\$ 0.109	\$ 0.095	\$ 5.777	\$ 1,067	\$ 4,954	\$ 6,021	\$ 907	\$ 6,928
TOTAL	Last 12 Months			365		201.3	581,852	\$ 0.117	\$ 0.097	\$ 5.904	\$ 11,232	\$ 45,437	\$ 56,668	\$ 11,307	\$ 67,975

Donahue

Natural Gas

Delivery: New Jersey Natural Gas

22-0011-9247-19 Supply: UGI Energy Services LLC Account #: Period Start Period End **Delivery Charge** Year ('##) **Energy Use, CCF** Energy Cost \$/Therm **Supply Charge** Month Days Season **Energy Use, Therms Total Cost** Date Date Mar 2019 03/07/19 04/05/19 29 Spring 1,698 2,024 \$ 0.94 \$ 1,081.36 \$ 826.33 \$ 1,907.69 506 \$ 1.29 \$ 452.51 \$ \$ May 2019 04/05/19 05/08/19 33 Spring 424 199.06 651.57 05/08/19 06/07/19 261 311 \$ 1.57 370.59 \$ 117.46 488.05 May 2019 30 Summer \$ 103.16 \$ Jul 2019 06/07/19 07/09/19 32 Summer 226 268 \$ 1.70 352.78 \$ 455.94 Jul 2019 07/09/19 08/05/19 27 Summer 200 237 \$ 1.78 \$ 339.69 \$ 82.28 \$ 421.97 08/05/19 2.88 2019 09/03/19 29 Fall 95 113 \$ 287.57 \$ 37.59 \$ 325.16 Aug \$ Sep 2019 09/03/19 10/01/19 28 Fall 173 206 \$ 2.41 424.60 \$ 70.51 \$ 495.11 2019 10/01/19 11/01/19 31 Fall 180 214 \$ 2.41 \$ 438.29 \$ 77.67 515.96 Nov 2019 11/01/19 12/05/19 34 Winter 1,655 1,974 \$ 1.06 \$ 1,339.04 \$ 750.52 \$ 2,089.56 Dec Jan 2020 12/05/19 01/07/20 33 Winter 2,260 2,682 \$ 1.00 \$ 1,702.79 \$ 982.53 \$ 2,685.32 2020 01/31/20 1,720 2,050 \$ 1.02 \$ 1,318.33 \$ 762.42 \$ 2,080.75 Jan 01/07/20 24 Winter 2020 01/31/20 03/04/20 33 Winter 2,379 \$ 1,563.99 884.51 Ś Jan 2,001 1.03 \$ 2,448.50 TOTAL st 12 Months 363 12,963 \$ 1.12 \$ 9,671.54 \$ 4,894.04 \$ 14,565.58

Avg

Donahue

**Barnegat ISD gets quarterly bills for their water usage. Charges for their water are shown from their water bills in the photo below.

estimated.
(Rills were not

Water/Sewer Use

785071-10

Month	Year ('##)	Period Start Date	Period End Date	Days	Consumption (kGal)	,	Water Rate (\$/kGal)	Sewer Rate (\$/kGal)	Wa	ter Cost	Sewe	er Cost	То	tal Cost
Dec	2018	10/01/18	12/31/18	92	176	\$	5.97		\$	1,050	\$	2,247	\$	3,297
Mar	2019	01/01/19	03/31/19	90	76	\$	6.50		\$	494	\$	2,247	\$	2,741
Jun	2019	04/01/19	06/30/19	91	121	\$	5.99		\$	724	\$	2,247	\$	2,971
Sep	2019	07/01/19	09/30/19	92	190	\$	5.96		\$	1,133	\$	2,247	\$	3,380
Dec	2019	10/01/19	12/31/19	92	169	\$	5.97		\$	1,009	\$	2,247	\$	3,256
TOTAL	Last 12 Months			365	556	\$	6.04		\$	3,360	\$	8,988	\$	12,348

Horbelt

Summary A/C: 200000053963

Font is red are estimated. (Bills were not available)

Electrical Use
Delivery: JCP&L

East Coast Power & Gas of NJ

Account #: 100022354391

Supply:	& Gas of NJ														
Month	Year ('##)	Period Start Date	Period End Date	Days	Season	On Peak Demand (kW)	Energy Use (kWh)	Blended Rate \$/kWh	Consumption Rate \$/kWh	Demand Rate \$/kW	Delivery kWh Cost	Supplier kWh Cost	Total Consumption Cost (\$)	Demand Cost (\$)	Total Cost
Feb	2019	01/26/19	02/26/19	32	Win	173.4	66,236	\$ 0.110	\$ 0.095	\$ 5.908	\$ 1,098	\$ 5,172	\$ 6,270	\$ 1,025	\$ 7,295
Feb	2019	02/27/19	03/27/19	29	Win	144.0	54,408	\$ 0.110	\$ 0.095	\$ 5.835	\$ 913	\$ 4,249	\$ 5,162	\$ 840	\$ 6,002
Mar	2019	03/28/19	04/25/19	29	Win	131.9	43,777	\$ 0.114	\$ 0.096	\$ 5.795	\$ 798	\$ 3,419	\$ 4,217	\$ 764	\$ 4,981
May	2019	04/26/19	05/28/19	33	Win	200.4	57,442	\$ 0.118	\$ 0.097	\$ 5.917	\$ 1,099	\$ 4,466	\$ 5,564	\$ 1,186	\$ 6,750
May	2019	05/29/19	06/26/19	29	Spr	214.0	68,530	\$ 0.116	\$ 0.096	\$ 6.320	\$ 1,212	\$ 5,352	\$ 6,563	\$ 1,353	\$ 7,916
Jun	2019	06/27/19	07/26/19	30	Spr	157.8	67,075	\$ 0.113	\$ 0.099	\$ 6.210	\$ 1,378	\$ 5,238	\$ 6,615	\$ 980	\$ 7,595
Aug	2019	07/27/19	08/27/19	32	Spr	184.3	64,660	\$ 0.118	\$ 0.100	\$ 6.270	\$ 1,430	\$ 5,049	\$ 6,480	\$ 1,156	\$ 7,635
Aug	2019	08/28/19	09/25/19	29	Sum	207.9	65,440	\$ 0.117	\$ 0.097	\$ 6.311	\$ 1,167	\$ 5,186	\$ 6,353	\$ 1,312	\$ 7,666
Oct	2019	09/26/19	10/28/19	33	Sum	195.8	62,872	\$ 0.117	\$ 0.099	\$ 5.855	\$ 1,291	\$ 4,910	\$ 6,200	\$ 1,146	\$ 7,347
Oct	2019	10/29/19	11/26/19	29	Sum	187.2	48,277	\$ 0.122	\$ 0.099	\$ 5.867	\$ 1,009	\$ 3,770	\$ 4,779	\$ 1,098	\$ 5,878
Nov	2019	11/27/19	12/26/19	30	Fall	194.6	50,427	\$ 0.115	\$ 0.097	\$ 5.989	\$ 698	\$ 3,938	\$ 4,636	\$ 1,165	\$ 5,801
Dec	2019	12/27/19	01/24/20	29	Fall	201.9	52,577	\$ 0.118	\$ 0.095	\$ 5.864	\$ 901	\$ 4,106	\$ 5,006	\$ 1,184	\$ 6,191
Feb	2020	01/25/20	02/25/20	32	Fall	136.5	57,814	\$ 0.109	\$ 0.095	\$ 5.718	\$ 978	\$ 4,515	\$ 5,493	\$ 781	\$ 6,273
TOTAL	Last 12 Months			364		214.0	693,299	\$ 0.115	\$ 0.097	\$ 5.996	\$ 12,874	\$ 54,196	\$ 67,070	\$ 12,965	\$ 80,035

Horbelt

Natural Gas

Delivery: New Jersey Natural Gas

22-0006-7515-18 **Supply: UGI Energy Services LLC** Account #: **Period Start Period End Energy Use, Energy Cost** Delivery Charge | Supply Charge Month Year ('##) Days Season **Energy Use, CCF Total Cost** \$/Therm Date Date **Therms** 1,952 \$ Mar 2019 03/05/19 04/03/19 29 Spring 1,798 0.97 \$ 1,093.34 \$ 797.13 | \$ 1,890.47 May 2019 04/03/19 05/07/19 34 Spring 446 485 \$ 1.40 \$ 486.33 \$ 190.58 \$ 676.91 2019 05/07/19 06/06/19 30 106 115 \$ 3.26 \$ 331.10 \$ 43.59 \$ 374.69 May Summer Jul 2019 06/06/19 07/08/19 32 Summer 64 69 \$ 4.89 \$ 311.90 \$ 26.73 | \$ 338.63 Jul 2019 07/08/19 08/06/19 29 43 46 \$ 6.85 \$ 302.34 Summer 15.98 318.32 08/06/19 08/30/19 24 Aug 2019 Fall 33 36 7.07 241.28 11.66 252.94 2019 08/30/19 09/28/19 29 71 77 4.44 315.14 \$ 26.19 \$ 341.33 Aug Fall 11/04/19 323 Sep 2019 09/28/19 37 Fall 351 1.79 500.42 \$ 126.96 627.38 2019 11/04/19 12/03/19 29 Winter 1,705 1,852 1.03 1,201.72 \$ 704.32 \$ 1,906.04 Nov 2020 12/03/19 01/06/20 34 Winter 2,637 2,851 \$ 0.96 \$ 1,702.78 \$ 1,044.66 2,747.44 Jan 2020 01/30/20 24 Jan 01/06/20 Winter 2,115 2,296 \$ 0.97 1,369.25 \$ 853.90 \$ 2,223.15 Jan 2020 01/30/20 03/02/20 32 Winter 2,507 \$ 2,315 0.99 1,545.43 \$ 932.24 \$ 2,477.67 TOTAL st 12 Months 363 12,637 \$ 1.12 | \$ 9,401.03 \$ 4,773.94 \$ 14,174.97

Horbelt

**Barnegat ISD gets quarterly bills for their water usage. Charges for their water are shown from their water bills in the photo below.

estimated.
(Rills were not

Water/Sewer Use

Account 785071-4

Month	Year ('##)	Period Start Date	Period End Date	Days	Season	Consumption (kGal)	Water Rate (\$/kGal)	Sewer Rate (\$/kGal)	Water Cost	Sewer Cost	Tota	al Cost
Dec	2018	10/01/18	12/31/18	92		88	5.5681		\$ 490	\$ 1,926	\$	2,416
Mar	2019	01/01/19	03/31/19	90		82	5.6513		\$ 463	\$ 1,926	\$	2,389
Jun	2019	04/01/19	06/30/19	91		108	5.4677		\$ 591	\$ 1,926	\$	2,517
Sep	2019	07/01/19	09/30/19	92		26	9.6112		\$ 250	\$ 1,926	\$	2,176
Dec	2019	10/01/19	12/31/19	92		118	5.5060		\$ 650	\$ 1,926	\$	2,576
TOTAL	Last 12 Months			365		334	5.8489		1,954	7,704		9,658

Appendix D: Fina	ncial Analysis	



The Board of Education of the Township of Barnegat

In the County of Ocean, New Jersey 2020 Energy Savings Improvement Plan

Projected Energy Savings with Projected Lease Financing - 18 Years (PRELIMINARY) INCLUDES ALTERNATES #1 & 2 - 18 YEARS

	Assumptions - I	Financing	
Dated & Delivery:	12/1/20	First Principal:	12/1/21
First Interest:	12/1/21	Final Principal:	12/1/38
		Borrowing Rate:	2.60%
Sources of Funds:			
Proceeds of Financing:		<u>\$5,677,000</u>	
Total Sources:		\$5,677,000	
Uses of Funds:			
Total Project Costs:		\$5,616,827	
Financing Costs:		60,000	
Capitalized Interest		0	
Rounding:		<u>173</u>	
Total Uses:		\$5,677,000	

Assumptions - Project [†]	
Project Hard Costs:	\$4,891,724
Soft Costs (excl. Financing)	<u>\$725,103</u>
Total Project Costs:	<u>\$5,616,827</u>
Energy Savings Escalation Rate:	2.279%
Utility Cost Escalation Rate:	2.000%
Operational Savings Escalation Rate:	0.000%

	PRO	JECTED PR	OJECT SAVING	<u>38</u>	REBATES^	TOTAL		SCHOOL	DISTRICT C	OSTS		
School	Projected			Total		Projected						
FY End	Energy	Annual PV	Annual O&M	Projected	Approved	Annual	**Proje	cted 2020 Le	ase**	Perform.	Total	NET
6/30	Savings [†]	Savings [†]	Savings [†]	Savings	Rebates [†]	Benefits	Principal	Interest	Total P+I	Mgmt ^{†*}	Costs	SAVINGS
2021												
2022	185,088	149,034	(1,062)	333,060		333,060	110,000	219,973	329,973		329,973	3,087
2023	189,306	152,779	(1,062)	341,023	230,556	571,579	429,000	139,165	568,165		568,165	3,414
2024	193,620	156,616	(1,562)	348,673	230,556	579,229	448,000	127,764	575,764		575,764	3,465
2025	198,032	160,547	(1,562)	357,017		357,017	235,000	118,885	353,885		353,885	3,132
2026	202,545	164,575	(1,562)	365,558		365,558	250,000	112,580	362,580		362,580	2,978
2027	207,161	168,703	(1,562)	374,302		374,302	265,000	105,885	370,885		370,885	3,417
2028	211,882	172,932	(1,562)	383,252		383,252	281,000	98,787	379,787		379,787	3,465
2029	216,710	177,265	(1,562)	392,413		392,413	298,000	91,260	389,260		389,260	3,153
2030	221,648	181,705	(1,562)	401,790		401,790	315,000	83,291	398,291		398,291	3,499
2031	226,699	186,254	(1,562)	411,390		411,390	333,000	74,867	407,867		407,867	3,523
2032	231,865	190,914	(1,562)	421,217		421,217	352,000	65,962	417,962		417,962	3,255
2033	237,149	195,689	(1,562)	431,276		431,276	371,000	56,563	427,563		427,563	3,713
2034	242,553	200,582	(1,562)	441,573		441,573	392,000	46,644	438,644		438,644	2,929
2035	248,080	205,595	(1,562)	452,112		452,112	413,000	36,179	449,179		449,179	2,933
2036	253,733	210,730	(1,562)	462,901		462,901	434,000	25,168	459,168		459,168	3,733
2037	259,515		(1,562)	257,953		257,953	238,000	16,432	254,432		254,432	3,521
2038	265,429		(1,562)	263,867		263,867	250,000	10,088	260,088		260,088	3,779
2039	271,478		(1,562)	269,916		269,916	263,000	3,419	266,419		266,419	3,497
2040	277,664		(1,562)	276,102		276,102			0		0	276,102
2041	283,991		(1,562)	282,429		282,429			0		0	282,429
Total:	4,624,148	2,673,920	(30,247)	7,267,821	461,112	7,728,933	5,677,000	1,432,912	7,109,912	0	7,109,912	619,021

[†] Projections from CHA Consulting. Project Costs exclude financing costs. Rebates assumed to be received, in part, in FY2022 and 2023.

Phoenix Advisors, LLC 8/14/2020

Assumed not applicable because DIY ESIP.

^{^ 100%} of Rebates utilized in debt structuring. Spread over 2 fiscal years to be conservative.

Appendix E: EPA Portfolio Manager	



ENERGY STAR® Data Verification Checklist

42

ENERGY STAR ® Score¹

Barnegat High School

Registry Name: Barnegat High School

Property Type: K-12 School Gross Floor Area (ft²): 201,214

Built: 2004

For Year Ending: Jan 31, 2020 Date Generated: May 22, 2020

1. The ENERGY STAR score is a 1-to-100 assessment of a building's energy efficiency as compared with similar building nationwide, adjusting for climate and business activity.

Property & Contact Information								
Property Address Barnegat High School 180 Bengal Boulevard Barnegat, New Jersey 08005	Property Owner	Primary Contact						
Property ID: 10497355								

1. Review of Whole Property Characteristics

Basic Property Information		
1) Property Name: Barnegat High School Is this the official name of the property? If "No", please specify:	☐ Yes	□No
2) Property Type: K-12 School Is this an accurate description of the primary use of this property?	☐ Yes	□ No
3) Location: 180 Bengal Boulevard Barnegat, New Jersey 08005	☐ Yes	□No
Is this correct and complete?		
4) Gross Floor Area: 201,214 ft ²	☐ Yes	☐ No

Is value an accurate account of the gross floor area for the property?		
5) Average Occupancy (%): 85	☐ Yes	□No
Is this occupancy percentage accurate for the entire 12 month period being assessed?		
6) Number of Buildings: 1	Yes	□No
Does this number accurately represent all structures?		
7) Whole Property Verification:	Yes	□No
Does this application represent the entire property? If any space or energy use has been excluded from this property, please describe it in the notes section below.		
Notes:		
Indoor Environmental Quality		
1) Outdoor Air Ventilation		es No
Were measurements and/or calculations taken and recorded under normal building operatir conditions using an allowable method as described in the Licensed Professional's Guide which demonstrate this property meets the minimum ventilation rates according to ANSI/ASHRAE Standard 62?	ng	
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit measurements will result in a denial of the application.]	it	
2) Thermal Environmental Conditions		es No
Were measurements taken and recorded per the Licensed Professional's Guide which demonstrate this property meets the acceptable thermal environmental conditions according to ANSI/ASHRAE Standard 55, Thermal Environmental Conditions for Human Occupancy?	9	
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit measurements will result in a denial of the application.]	t	
3) Illumination		es No
Were measurements taken and recorded per the LP Guide which demonstrate this property meets minimum recommended illumination levels according to the most recent version of the Illuminating Engineering Society of North America (IESNA) Lighting Handbook?		
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit	t	

Notes:			

2. Review of Property Use Details

K-12 School: Building Use		
This Use Detail is used to calculate the 1-100 ENERGY STAR Score.		
★ 1) Gross Floor Area : 201,214 ft²	Yes	☐ No
Is this the total size, as measured between the outside surface of the exterior walls of the building(s)? This includes all areas inside the building(s) such as: occupied tenant areas, common areas, meeting areas, break rooms, restrooms, elevator shafts, mechanical equipment areas, and storage rooms. Gross Floor Area should not include interstitial plenum space between floors, which may house pipes and ventilation. Gross Floor Area is not the same as rentable, but rather includes all area inside the building(s). Leasable space would be a sub-set of Gross Floor Area. In the case where there is an atrium, you should count the Gross Floor Area at the base level only. Do not increase the size to accommodate open atrium space at higher levels. The Gross Floor Area should not include any exterior spaces such as balconies or exterior loading docks and driveways.		
2) High School: 100% Yes	☐ Yes	☐ No
Is this is the correct answer to whether the property is a high school (teaching grades 10, 11, and/or 12)? If the property teaches to high school students at all, then it is a high school. For example, if the school teaches grades K-12 (elementary/middle and high school), then it is considered a high school.		
☆ 3) Number of Workers on Main Shift: 70	Yes	□No
Is this the number of workers present during the main shift? Note that this is not a total count of workers, but rather a count of workers who are present at the same time. For example, if there are two daily eight hour shifts of 100 workers each, the Number of Workers on Main Shift value is 100. Number of Workers on Main Shift may include employees of the property, sub-contractors who are onsite regularly, and volunteers who perform regular onsite tasks. Number of Workers should not include visitors to the buildings such as clients, customers, or patients.		
4) Student Seating Capacity: 937	☐ Yes	☐ No
Is this the maximum number of students for which the school was designed? This should include the seating capacity of the entire school. If portable classrooms have been added to the school, include the capacity of these classrooms, as they expand the overall capacity of the school.		
5) Months in Use: 9	☐ Yes	☐ No
Is this the total number of months that the property is open for standard activities?		
★ 6) Weekend Operation : 100% Yes	☐ Yes	☐ No

Is this the correct answer to whether the property includes regular activities on the weekend beyond the scope of maintenance, cleaning, and security personnel? Weekend activity includes any time when the property is used for classes, performances, or other school or community activities, on one or both days of the weekend during one or more seasons of the year.		
7) Number of Computers: 950	☐ Yes	□No
Is this the total number of desktop computers, laptops, and data servers at the property? This number should not include tablet computers, such as iPads, or any other types of office equipment. The count should only reflect computers that are owned by the school. It should not include any computers that are brought onsite by students or staff.		
★8) Cooking Facilities: 100% Yes	☐ Yes	☐ No
Is this the correct answer to whether the property has a commercial cooking area designed to provide and serve food to occupants and/or visitors? Commercial kitchens include restaurants and cafeterias, but not employee break room kitchens.		
9) Gross Floor Area Used for Food Preparation: 0 ft² ← default	Yes	☐ No
Is this the correct Gross Floor Area Used for Food Preparation? It is defined as the total size of all large/commercial kitchen areas used for the storage and preparation of food. It is a subset of the property Gross Floor Area. It should not include small kitchens, employee break rooms/pantries, concession stands, or service and seating areas.		
10) Number of Walk-in Refrigeration/Freezer Units: 2	☐ Yes	☐ No
Is this the total count of walk-in units at the property? The Number of Walk-in Refrigeration/Freezer Units is the total count of walk-in units at the property. Walk-in Refrigeration/Freezers are large enough for a person to actually walk into. They may or may not have a door, plastic strips, or other flexible covers.		
★ 11) Percent That Can Be Heated: 100	☐ Yes	□No
Is this the total percentage of the property that can be heated by mechanical equipment?		
★ 12) Percent That Can Be Cooled: 80	Yes	☐ No
Is this the total percentage of the property that can be cooled by mechanical equipment? This includes all types of cooling from central air to individual window units.		
13) Gymnasium Floor Area: 0 ft² ← default	☐ Yes	☐ No
Is this the correct floor area for the gymnasium, including gymnasium/athletic areas, spectator areas, locker rooms, and other associated spaces?		
14) School District: Barnegat Twp	☐ Yes	☐ No
Is this the administrative school district in which the property is located?		
Notes:		

3. Review of Energy Consumption

Site Energy Use Summary		National Median Comparison	
Electric - Solar (kBtu)	1,441,189.4 (11%)	National Median Site EUI (kBtu/ft²)	58.7
Electric - Grid (kBtu)	7,186,304.9 (57%)	National Median Source EUI (kBtu/ft²)	119.5
Natural Gas (kBtu)	4,065,641 (32%)	% Diff from National Median Source	7.4%
Total Energy (kBtu)	12,693,135.2	EUI	7.4/0
Energy Intensity		Emissions (based on site energy use)	
Site (kBtu/ft²)	63.1	Greenhouse Gas Emissions (Metric	044
Source (kBtu/ft²)	128.4	Tons CO2e)	944
		Power Generation Plant or Distribution U Atlantic City Electric Co	Jtility:

Summary of All Associated Energy Meters

The following meters are associated with the property, meaning that they are added together to get the total energy use for the property. Please see additional tables in this checklist for the exact meter consumption values. **Note: please review all meter entries, making note of any unusual entries, and, if they are correct, provide a manual note to explain.**

entries, making note of any unusual entries, and, if they are correct, provide a manual note to explain.				
Meter Name	Fuel Type	Start Date	End Date	Associated With:
Electric Solar Meter	Electric - Solar	02/21/2019	In Use	Barnegat High School; Barnegat Township School District
Electric Grid Meter	Electric - Grid	02/21/2019	In Use	Barnegat High School; Barnegat Township School District
Natural Gas	Natural Gas	01/31/2019	In Use	Barnegat High School; Barnegat Township School District
Total Energy Use Do the meters shown above account for the total energy use of this property during the reporting period of this application?				
Additional Fuels Do the meters above include all fuel types at the property? That is, no additional fuels such as district steam, generator fuel oil have been excluded.				
On-Site Solar and Wind Energy Are all on-site solar and wind installations reported in this list (if present)? All on-site systems must be reported.				

Notes:	ter: Electric Sola	ar Meter (kWh (thousa	and Watt-hours))	
Associated With: Ra	rnegat High School	; Barnegat Township Sch	nool District	
			Energy	
Start Date	End Date	Energy Used Onsite	Exported Offsite	REC Ownership
02/21/2019	03/22/2019	38,904.7 ← estimate	0	Owned
03/23/2019	04/22/2019	44,723.29 ← estimate	0	Owned
04/23/2019	05/22/2019	50,622.68 ← estimate	0	Owned
05/23/2019	06/20/2019	48,801.94 ← estimate	0	Owned
06/21/2019	07/22/2019	50,765.29 ← estimate	0	Owned
07/23/2019	08/21/2019	45,710.53 ← estimate	0	Owned
08/22/2019	09/20/2019	38,514.15 ← estimate	0	Owned
09/21/2019	10/23/2019	30,650.6 ← estimate	0	Owned
10/24/2019	11/21/2019	23,721.12 ← estimate	0	Owned
11/22/2019	12/20/2019	19,060.1 ← estimate	0	Owned
12/21/2019	01/21/2020	22,095.5 ← estimate	0	Owned
01/22/2020	02/22/2020	28,219.37 ← estimate	0	Owned
		al Consumption (kWh (tho t-hours)):	ousand	441,789.27
	Tota Btu)	al Consumption (kBtu (the)):	ousand	1,507,385
Total Energy Consumption for this Meter				
through this meter that		include consumption of all enditions for the reporting period of ived by the property)?		
Notes:				

Electric - Grid Meter: Electric Grid Meter (kWh (thousand Watt-hours)) Associated With: Barnegat High School; Barnegat Township School District **Start Date End Date Usage Green Power?** 02/21/2019 03/22/2019 142,994 No 03/23/2019 04/22/2019 122,169 No 04/23/2019 145,481 No 05/22/2019 189,962 05/23/2019 06/20/2019 No 06/21/2019 07/22/2019 224,196 No 07/23/2019 08/21/2019 No 269,922 08/22/2019 09/20/2019 No 252,815 09/21/2019 10/23/2019 236,481 No 10/24/2019 11/21/2019 157,874 No 11/22/2019 12/20/2019 No 154,275 12/21/2019 01/21/2020 160,788 No 01/22/2020 02/22/2020 157,531.5 **€** estimate No **Total Consumption (kWh (thousand** 2,214,488.5 Watt-hours)): **Total Consumption (kBtu (thousand** 7,555,834.8 Btu)): Total Energy Consumption for this Meter ☐ Yes ☐ No Do the fuel consumption totals shown above include consumption of all energy tracked through this meter that affect energy calculations for the reporting period of this application (i.e., do the entries match the utility bills received by the property)? Notes:

Natural Gas Meter: Natural Gas (therms)		
Associated With: Barnegat High So Start Date	hool; Barnegat Township School [End Date	District Usage
01/31/2019	03/06/2019	7,744 € estimate
03/07/2019	04/05/2019	6,922
04/05/2019	05/08/2019	1,385
05/08/2019	06/07/2019	548

Start Date	End Date	Usage			
06/07/2019	07/09/2019	450			
07/09/2019	08/05/2019	333			
08/05/2019	09/03/2019	370			
09/03/2019	10/01/2019	459			
10/01/2019	11/01/2019	1,036			
11/01/2019	12/05/2019	7,219			
12/05/2019	01/07/2020	7,915			
01/07/2020	01/31/2020	6,262			
01/31/2020	03/04/2020	7,744			
	Total Consumption (therms):	48,387			
	Total Consumption (kBtu (thousand Btu)):	4,838,700			
Total Energy Consumption for	or this Meter	☐ Yes ☐ No			
through this meter that affect en	shown above include consumption of all energy tracked ergy calculations for the reporting period of this applicati ility bills received by the property)?	ion			
Notes:					
4. Signature & Stamp of Verifying Licensed Professional (Name) visited this site on(Date). Based on the conditions observed at the time of the visit to this property, I verify that the information contained within this application is accurate and in accordance with the Licensed Professional Guide.					
Signature					

Licensed Professional	
, ()	
NOTE: When applying for the ENEDCY STAD, the signature of the	
NOTE: When applying for the ENERGY STAR, the signature of the Verifying Professional must match the stamp.	Professional Engineering Stamp


ENERGY STAR® Energy Performance Scorecard



out of 100

Barnegat High School

For Year Ending	January 31, 2020		
Property Address	180 Bengal Boulevard Barnegat, New Jersey 08005		
Primary Function	K-12 School		
Gross Floor Area (ft²)	201,214		
Year built	2004		
Energy Use per sq. ft.*	63.1 kBtu		

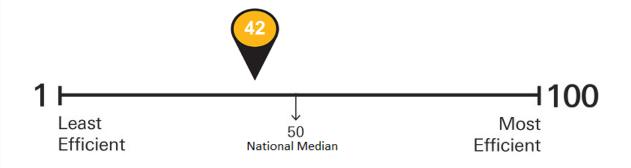

What is the ENERGY STAR Score?

The ENERGY STAR score rates commercial building's energy performance relative to similar buildings nationwide. Expressed as a number on a simple 1-100 scale, the score rates performance on a percentile basis: a building with a score of 50 performs better than 50% of its peers. Higher scores mean better energy efficiency, resulting in less energy use and fewer greenhouse gas emissions. If a 1-100 score for a specific building type has not been developed, Site Energy Use Intensity (EUI) will be displayed on this scorecard.

Learn more at: energystar.gov/scorecard

*Site energy use



Date Generated: May 22, 2020



ENERGY STAR[®] Statement of Energy **Performance**

Barnegat High School

Primary Property Type: K-12 School Gross Floor Area (ft2): 201,214

Built: 2004

ENERGY STAR® Score¹

For Year Ending: January 31, 2020 Date Generated: May 22, 2020

1. The ENERGY STAR climate and business		ent of a building's energy	efficiency as compared	d with similar buildings natior	wide, adjusting for
Property & Con	tact Information				
Property Addres Barnegat High Sc 180 Bengal Boule Barnegat, New Je	hool vard	Property Owner	-	Primary Contact	
Property ID: 1049	97355				
Energy Consur	nption and Energy U	se Intensity (EUI)			
Site EUI 63.1 kBtu/ft² Source EUI 128.4 kBtu/ft²	Annual Energy by Fue Electric - Solar (kBtu) Electric - Grid (kBtu) Natural Gas (kBtu)	1,441,189 (11%) 7,186,305 (57%)	% Diff from National Annual Emissions	ite EUI (kBtu/ft²) ource EUI (kBtu/ft²) al Median Source EUI	58.7 119.5 7% 944
Signature & S	Stamp of Verifying	g Professional			
I	(Name) verify tha	t the above information	n is true and correct t	to the best of my knowledg	e.
LP Signature:	sional	Date:	-		
, ()					
			Profession Architect	nal Engineer or Registere Stamp	ed



ENERGY STAR® Data Verification Checklist

46

ENERGY STAR ® Score¹

Russell O. Brackman Middle School

Registry Name: Russell O. Brackman Middle School

Property Type: K-12 School Gross Floor Area (ft²): 172,970

Built: 1989

For Year Ending: Jan 31, 2020 Date Generated: May 22, 2020

1. The ENERGY STAR score is a 1-to-100 assessment of a building's energy efficiency as compared with similar building nationwide, adjusting for climate and business activity.

Property & Contact Information						
Property Address Russell O. Brackman Middle School 600 Barnegat Blvd. North Barnegat, New Jersey 08005	Property Owner	Primary Contact				
Property ID: 10497358	Property ID: 10497358					

1. Review of Whole Property Characteristics

Basic Property Information				
1) Property Name: Russell O. Brackman Middle School Is this the official name of the property?	☐ Yes ☐	No		
If "No", please specify: 2) Property Type: K-12 School Is this an accurate description of the primary use of this property?	☐ Yes [No		
3) Location: 600 Barnegat Blvd. North Barnegat, New Jersey 08005	☐ Yes ☐	□No		
Is this correct and complete? 4) Gross Floor Area: 172,970 ft ²	☐ Yes [☐ No		

Is value an accurate account of the gross floor area for the property?		
5) Average Occupancy (%): 85	Yes	□No
Is this occupancy percentage accurate for the entire 12 month period being assessed?		
6) Number of Buildings: 1	Yes	□No
Does this number accurately represent all structures?		
7) Whole Property Verification:	Yes	□No
Does this application represent the entire property? If any space or energy use has been excluded from this property, please describe it in the notes section below.		
Notes:		
Indoor Environmental Quality		
1) Outdoor Air Ventilation		es No
Were measurements and/or calculations taken and recorded under normal building operatir conditions using an allowable method as described in the Licensed Professional's Guide which demonstrate this property meets the minimum ventilation rates according to ANSI/ASHRAE Standard 62?	ng	
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit measurements will result in a denial of the application.]	it	
2) Thermal Environmental Conditions		es No
Were measurements taken and recorded per the Licensed Professional's Guide which demonstrate this property meets the acceptable thermal environmental conditions according to ANSI/ASHRAE Standard 55, Thermal Environmental Conditions for Human Occupancy?	9	
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit measurements will result in a denial of the application.]	t	
3) Illumination		es No
Were measurements taken and recorded per the LP Guide which demonstrate this property meets minimum recommended illumination levels according to the most recent version of the Illuminating Engineering Society of North America (IESNA) Lighting Handbook?		
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit	t	

Notes:			

2. Review of Property Use Details

K-12 School: Building Use				
This Use Detail is used to calculate the 1-100 ENERGY STAR Score.				
★ 1) Gross Floor Area : 172,970 ft²	☐ Yes	☐ No		
Is this the total size, as measured between the outside surface of the exterior walls of the building(s)? This includes all areas inside the building(s) such as: occupied tenant areas, common areas, meeting areas, break rooms, restrooms, elevator shafts, mechanical equipment areas, and storage rooms. Gross Floor Area should not include interstitial plenum space between floors, which may house pipes and ventilation. Gross Floor Area is not the same as rentable, but rather includes all area inside the building(s). Leasable space would be a sub-set of Gross Floor Area. In the case where there is an atrium, you should count the Gross Floor Area at the base level only. Do not increase the size to accommodate open atrium space at higher levels. The Gross Floor Area should not include any exterior spaces such as balconies or exterior loading docks and driveways.				
☆ 2) High School : No	☐ Yes	☐ No		
Is this is the correct answer to whether the property is a high school (teaching grades 10, 11, and/or 12)? If the property teaches to high school students at all, then it is a high school. For example, if the school teaches grades K-12 (elementary/middle and high school), then it is considered a high school.				
☆ 3) Number of Workers on Main Shift: 50	Yes	☐ No		
Is this the number of workers present during the main shift? Note that this is not a total count of workers, but rather a count of workers who are present at the same time. For example, if there are two daily eight hour shifts of 100 workers each, the Number of Workers on Main Shift value is 100. Number of Workers on Main Shift may include employees of the property, sub-contractors who are onsite regularly, and volunteers who perform regular onsite tasks. Number of Workers should not include visitors to the buildings such as clients, customers, or patients.				
4) Student Seating Capacity: 720	Yes	☐ No		
Is this the maximum number of students for which the school was designed? This should include the seating capacity of the entire school. If portable classrooms have been added to the school, include the capacity of these classrooms, as they expand the overall capacity of the school.				
5) Months in Use: 9	Yes	☐ No		
Is this the total number of months that the property is open for standard activities?				
★ 6) Weekend Operation: No	Yes	☐ No		

	Is this the correct answer to whether the property includes regular activities on the weekend beyond the scope of maintenance, cleaning, and security personnel? Weekend activity includes any time when the property is used for classes, performances, or other school or community activities, on one or both days of the weekend during one or more seasons of the year.		
7) I	Number of Computers: 302.7 € default	Yes	☐ No
	Is this the total number of desktop computers, laptops, and data servers at the property? This number should not include tablet computers, such as iPads, or any other types of office equipment. The count should only reflect computers that are owned by the school. It should not include any computers that are brought onsite by students or staff.		
† 8	S) Cooking Facilities: 100% Yes	Yes	☐ No
	Is this the correct answer to whether the property has a commercial cooking area designed to provide and serve food to occupants and/or visitors? Commercial kitchens include restaurants and cafeterias, but not employee break room kitchens.		
9) (Gross Floor Area Used for Food Preparation: 0 ft² € default	Yes	☐ No
	Is this the correct Gross Floor Area Used for Food Preparation? It is defined as the total size of all large/commercial kitchen areas used for the storage and preparation of food. It is a subset of the property Gross Floor Area. It should not include small kitchens, employee break rooms/pantries, concession stands, or service and seating areas.		
10)	Number of Walk-in Refrigeration/Freezer Units: 1	Yes	☐ No
	Is this the total count of walk-in units at the property? The Number of Walk-in Refrigeration/Freezer Units is the total count of walk-in units at the property. Walk-in Refrigeration/Freezers are large enough for a person to actually walk into. They may or may not have a door, plastic strips, or other flexible covers.		
† 1	1) Percent That Can Be Heated: 100	☐ Yes	□No
	Is this the total percentage of the property that can be heated by mechanical equipment?		
† 1	2) Percent That Can Be Cooled: 80	Yes	☐ No
	Is this the total percentage of the property that can be cooled by mechanical equipment? This includes all types of cooling from central air to individual window units.		
13)	Gymnasium Floor Area: 0 ft² ← default	Yes	☐ No
	Is this the correct floor area for the gymnasium, including gymnasium/athletic areas, spectator areas, locker rooms, and other associated spaces?		
14)	School District: Barnegat Twp	Yes	☐ No
	Is this the administrative school district in which the property is located?		
Not	es:		

3. Review of Energy Consumption

Data Overview			
Site Energy Use Summary		National Median Comparison	
Electric - Grid (kBtu)	4,591,761 (60%)	National Median Site EUI (kBtu/ft²)	42.8
Electric - Solar (kBtu)	1,421,675.4 (19%)	National Median Source EUI (kBtu/ft²)	89.6
Natural Gas (kBtu) Total Energy (kBtu)	1,638,005.6 (21%) 7,651,442	% Diff from National Median Source EUI	3.3%
Energy Intensity		Emissions (based on site energy use)	
Site (kBtu/ft²) Source (kBtu/ft²)	44.2 92.5	Greenhouse Gas Emissions (Metric Tons CO2e)	552.2
		Power Generation Plant or Distribution Atlantic City Electric Co	Utility:
Note: All values are annualized to a	12-month period. Source Energy includ	es energy used in generation and transmission to enable an e	quitable assessment.

Summary of All Associated Energy Meters

The following meters are associated with the property, meaning that they are added together to get the total energy use for the property. Please see additional tables in this checklist for the exact meter consumption values. **Note: please review all meter entries, making note of any unusual entries, and, if they are correct, provide a manual note to explain.**

Meter Name	Fuel Type	Start Date	End Date	Associated With:		
Electric Grid Meter	Electric - Grid	01/26/2019	In Use	Barnegat Township School District; Russell O. Brackman Middle School		
Natural Gas	Natural Gas	01/31/2019	In Use	Barnegat Township School District; Russell O. Brackman Middle School		
Electric Solar Meter	Electric - Solar	02/21/2019	In Use	Barnegat Township School District; Russell O. Brackman Middle School		
Total Energy Use]Yes		
	Do the meters shown above account for the total energy use of this property during the reporting period of this application?					
Additional Fuels]Yes		
Do the meters above include all fuel types at the property? That is, no additional fuels such as district steam, generator fuel oil have been excluded.						
On-Site Solar and Wind Energy Yes No						

Are all on-site solar and wind installations reported in this list (if present)? All on-site systems must be reported.					
Notes:					
Electric - Grid Meter: El	ectric Grid Meter (kW	h (thousand Watt-hours))		
_	·	t; Russell O. Brackman Midd			
Start Date	End Date	Usage	Green Power?		
01/26/2019	02/26/2019	157,358	No		
02/27/2019	03/27/2019	113,958	No		
03/28/2019	04/25/2019	78,666	No		
04/26/2019	05/28/2019	99,890	No		
05/29/2019	06/26/2019	94,506	No		
06/27/2019	07/26/2019	100,336	No		
07/27/2019	08/27/2019	124,086	No		
08/28/2019	09/25/2019	96,874	No		
09/26/2019	10/28/2019	100,280	No		
10/29/2019	11/25/2019	109,039	No		
11/26/2019	12/26/2019	125,360 ← estimate	No		
12/27/2019	01/24/2020	141,682	No		
01/25/2020	02/25/2020	151,944	No		
	Total Consumpt Watt-hours)):	ion (kWh (thousand	1,493,979		
	Total Consumpt Btu)):	ion (kBtu (thousand	5,097,456.3		
Total Energy Consumption	n for this Meter		☐ Yes ☐ No		

Do the fuel consumption totals shown above include consumption of all energy tracked through this meter that affect energy calculations for the reporting period of this application (i.e., do the entries match the utility bills received by the property)?

Notes:		
Natural Gas Meter: Natural Ga	s (therms)	
Associated With: Barnegat Towns	hip School District; Russell O. Brackman	Middle School
Start Date	End Date	Usage
01/31/2019	03/04/2019	2,694 ← estimate
03/04/2019	04/01/2019	2,787.6
04/01/2019	05/03/2019	1,801.1
05/03/2019	06/05/2019	562.1
06/05/2019	07/03/2019	148.4
07/03/2019	08/02/2019	122.1
08/02/2019	08/30/2019	126
08/30/2019	09/26/2019	167.5
09/26/2019	11/01/2019	636.1
11/01/2019	11/27/2019	1,464.3
11/27/2019	01/03/2020	3,216.2
01/03/2020	01/30/2020	2,570.5
01/30/2020	03/02/2020	2,693.5
	Total Consumption (therms):	18,989.4
	Total Consumption (kBtu (thousand Btu)):	1,898,940
Total Energy Consumption for th	is Meter	Yes No
	above include consumption of all energy tracked calculations for the reporting period of this applicate its received by the property)?	ion
Notes:		

Electric - Solar Meter: Electric Solar Meter (kWh (thousand Watt-hours))

Associated With: Barnegat Township 3	School District; Russell O. Brackman Middle School
, J	,

38,505.9 319 43,929 319 49,516.9 319 47,588	Used Onsite 98 ← estimate 55 ← estimate 59 ← estimate 2 ← estimate	Energy Exported Offsite 0 0 0	Owned Owned Owned Owned				
43,929 49,516. 47,588	.5 ← estimate 59 ← estimate	0 0	Owned				
49,516. 19 47,588	59 ← estimate	0					
19 47,588			Owned				
•	.2 ← estimate	_					
119 49 637		0	Owned				
40,007	.2 ← estimate	0	Owned				
19 44,779	.7 ← estimate	0	Owned				
38,015.	07 ← estimate	0	Owned				
30,514	.2 ← estimate	0	Owned				
23,855	.6 ← estimate	0	Owned				
19,246	.3 ← estimate	0	Owned				
22,264	.7 ← estimate	0	Owned				
28,211.	75 ← estimate	0	Owned				
Total Consumption (kWh (thousand 436,064.79 Watt-hours)):							
Total Consumption (kBtu (thousand 1,487,853.1 Btu)):							
Γotal Energy Consumption for this Meter ☐ Yes ☐ No							
Do the fuel consumption totals shown above include consumption of all energy tracked through this meter that affect energy calculations for the reporting period of this application (i.e., do the entries match the utility bills received by the property)?							
Notes:							
through this meter that affect energy calculations for the reporting period of this application (i.e., do the entries match the utility bills received by the property)?							

4. Signature & Stamp of Verifying Licensed Professional					
(Name) visited this site on _ of the visit to this property, I verify that the informatio with the Licensed Professional Guide.	(Date). Based on the conditions observed at the time n contained within this application is accurate and in accordance				

Signature _____

Date	
Licensed Professional	
, ()	
· · · · · · · · · · · · · · · · · · ·	
NOTE: When applying for the ENERGY STAR, the signature of the Verifying Professional must match the stamp.	
, ,	Professional Engineering Stamp


ENERGY STAR[®] Energy Performance Scorecard

46

out of 100

Russell O. Brackman Middle School

For Year Ending	January 31, 2020
Property Address	600 Barnegat Blvd. North Barnegat, New Jersey 08005
Primary Function	K-12 School
Gross Floor Area (ft²)	172,970
Year built	1989
Energy Use per sq. ft.*	44.2 kBtu

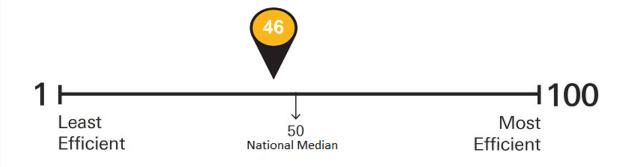

What is the ENERGY STAR Score?

The ENERGY STAR score rates commercial building's energy performance relative to similar buildings nationwide. Expressed as a number on a simple 1-100 scale, the score rates performance on a percentile basis: a building with a score of 50 performs better than 50% of its peers. Higher scores mean better energy efficiency, resulting in less energy use and fewer greenhouse gas emissions. If a 1-100 score for a specific building type has not been developed, Site Energy Use Intensity (EUI) will be displayed on this scorecard.

Learn more at: energystar.gov/scorecard

*Site energy use



Date Generated: May 22, 2020



ENERGY STAR[®] Statement of Energy **Performance**

Russell O. Brackman Middle School

Primary Property Type: K-12 School Gross Floor Area (ft²): 172,970

Built: 1989

ENERGY STAR® Score¹

For Year Ending: January 31, 2020 Date Generated: May 22, 2020

1. The ENERGY STAR score is a 1-100 assessm climate and business activity.	ent of a building's energy	efficiency as compared with similar buildings nation	wide, adjusting for
Property & Contact Information			
Property Address Russell O. Brackman Middle School 600 Barnegat Blvd. North Barnegat, New Jersey 08005 Property ID: 10497358	Property Owner	Primary Contact	
Energy Consumption and Energy U	se Intensity (EUI)		
Site EUI 44.2 kBtu/ft² Annual Energy by Fu Electric - Grid (kBtu) Electric - Solar (kBtu) Natural Gas (kBtu) 92.5 kBtu/ft²	4,591,761 (60%) 1,421,675 (19%)	National Median Comparison National Median Site EUI (kBtu/ft²) National Median Source EUI (kBtu/ft²) % Diff from National Median Source EUI Annual Emissions Greenhouse Gas Emissions (Metric Tons CO2e/year)	42.8 89.6 3% 552
Signature & Stamp of Verifyin	g Professional		
I (Name) verify that	at the above information	is true and correct to the best of my knowledg	е.
LP Signature: Licensed Professional,	Date:		
		Professional Engineer or Registere	ed



ENERGY STAR® Data Verification Checklist



ENERGY STAR ® Score¹

Cecil S. Collins Elementary School

Registry Name: Cecil S. Collins Elementary School

Property Type: K-12 School Gross Floor Area (ft²): 86,000

Built: 1980

For Year Ending: Jan 31, 2020 Date Generated: May 22, 2020

1. The ENERGY STAR score is a 1-to-100 assessment of a building's energy efficiency as compared with similar building nationwide, adjusting for climate and business activity.

Property & Contact Information				
Property Address Cecil S. Collins Elementary School 570 Barnegat Blvd. North Barnegat, New Jersey 08005 Property ID: 10497415	Property Owner	Primary Contact		

1. Review of Whole Property Characteristics

Basic Property Information		
1) Property Name: Cecil S. Collins Elementary School Is this the official name of the property?	☐ Yes ☐ No	
If "No", please specify: 2) Property Type: K-12 School Is this an accurate description of the primary use of this property?	☐ Yes ☐ No	
3) Location: 570 Barnegat Blvd. North Barnegat, New Jersey 08005	☐ Yes ☐ No	
Is this correct and complete?		
4) Gross Floor Area: 86,000 ft ²	☐ Yes ☐ No	

Is value an accurate account of the gross floor area for the property?		
5) Average Occupancy (%): 85	Yes	□No
Is this occupancy percentage accurate for the entire 12 month period being assessed?		
6) Number of Buildings: 1	Yes	□No
Does this number accurately represent all structures?		
7) Whole Property Verification:	Yes	□No
Does this application represent the entire property? If any space or energy use has been excluded from this property, please describe it in the notes section below.		
Notes:		
Indoor Environmental Quality		
1) Outdoor Air Ventilation		es No
Were measurements and/or calculations taken and recorded under normal building operatir conditions using an allowable method as described in the Licensed Professional's Guide which demonstrate this property meets the minimum ventilation rates according to ANSI/ASHRAE Standard 62?	ng	
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit measurements will result in a denial of the application.]	it	
2) Thermal Environmental Conditions		es No
Were measurements taken and recorded per the Licensed Professional's Guide which demonstrate this property meets the acceptable thermal environmental conditions according to ANSI/ASHRAE Standard 55, Thermal Environmental Conditions for Human Occupancy?	9	
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit measurements will result in a denial of the application.]	t	
3) Illumination		es No
Were measurements taken and recorded per the LP Guide which demonstrate this property meets minimum recommended illumination levels according to the most recent version of the Illuminating Engineering Society of North America (IESNA) Lighting Handbook?		
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit	t	

Notes:			

2. Review of Property Use Details

K-12 School: Building Use		
This Use Detail is used to calculate the 1-100 ENERGY STAR Score.		
★ 1) Gross Floor Area: 86,000 ft²	☐ Yes	□No
Is this the total size, as measured between the outside surface of the exterior walls of the building(s)? This includes all areas inside the building(s) such as: occupied tenant areas, common areas, meeting areas, break rooms, restrooms, elevator shafts, mechanical equipment areas, and storage rooms. Gross Floor Area should not include interstitial plenum space between floors, which may house pipes and ventilation. Gross Floor Area is not the same as rentable, but rather includes all area inside the building(s). Leasable space would be a sub-set of Gross Floor Area. In the case where there is an atrium, you should count the Gross Floor Area at the base level only. Do not increase the size to accommodate open atrium space at higher levels. The Gross Floor Area should not include any exterior spaces such as balconies or exterior loading docks and driveways.		
★ 2) High School: No	☐ Yes	No
Is this is the correct answer to whether the property is a high school (teaching grades 10, 11, and/or 12)? If the property teaches to high school students at all, then it is a high school. For example, if the school teaches grades K-12 (elementary/middle and high school), then it is considered a high school.		
★ 3) Number of Workers on Main Shift: 40	Yes	No
Is this the number of workers present during the main shift? Note that this is not a total count of workers, but rather a count of workers who are present at the same time. For example, if there are two daily eight hour shifts of 100 workers each, the Number of Workers on Main Shift value is 100. Number of Workers on Main Shift may include employees of the property, sub-contractors who are onsite regularly, and volunteers who perform regular onsite tasks. Number of Workers should not include visitors to the buildings such as clients, customers, or patients.		
4) Student Seating Capacity: 472	☐ Yes	□No
Is this the maximum number of students for which the school was designed? This should include the seating capacity of the entire school. If portable classrooms have been added to the school, include the capacity of these classrooms, as they expand the overall capacity of the school.		
5) Months in Use: 9	☐ Yes	☐ No
Is this the total number of months that the property is open for standard activities?		
★ 6) Weekend Operation: No	Yes	☐ No

Is this the correct answer to whether the property includes regular activities on the weekend beyond the scope of maintenance, cleaning, and security personnel? Weekend activity includes any time when the property is used for classes, performances, or other school or community activities, on one or both days of the weekend during one or more seasons of the year.		
7) Number of Computers: 160 € default	☐ Yes	☐ No
Is this the total number of desktop computers, laptops, and data servers at the property? This number should not include tablet computers, such as iPads, or any other types of office equipment. The count should only reflect computers that are owned by the school. It should not include any computers that are brought onsite by students or staff.		
★8) Cooking Facilities: 100% Yes	☐ Yes	☐ No
Is this the correct answer to whether the property has a commercial cooking area designed to provide and serve food to occupants and/or visitors? Commercial kitchens include restaurants and cafeterias, but not employee break room kitchens.		
9) Gross Floor Area Used for Food Preparation: 0 ft² ← default	Yes	☐ No
Is this the correct Gross Floor Area Used for Food Preparation? It is defined as the total size of all large/commercial kitchen areas used for the storage and preparation of food. It is a subset of the property Gross Floor Area. It should not include small kitchens, employee break rooms/pantries, concession stands, or service and seating areas.		
10) Number of Walk-in Refrigeration/Freezer Units: 1	☐ Yes	☐ No
Is this the total count of walk-in units at the property? The Number of Walk-in Refrigeration/Freezer Units is the total count of walk-in units at the property. Walk-in Refrigeration/Freezers are large enough for a person to actually walk into. They may or may not have a door, plastic strips, or other flexible covers.		
★ 11) Percent That Can Be Heated: 100	Yes	☐ No
Is this the total percentage of the property that can be heated by mechanical equipment?		
★ 12) Percent That Can Be Cooled: 80	☐ Yes	□No
Is this the total percentage of the property that can be cooled by mechanical equipment? This includes all types of cooling from central air to individual window units.		
13) Gymnasium Floor Area: 0 ft² ← default	☐ Yes	☐ No
Is this the correct floor area for the gymnasium, including gymnasium/athletic areas, spectator areas, locker rooms, and other associated spaces?		
14) School District: Barnegat Twp	☐ Yes	☐ No
Is this the administrative school district in which the property is located?		
Notes:		

3. Review of Energy Consumption

Data Overview			
Site Energy Use Summary		National Median Comparison	
Electric - Grid (kBtu)	1,244,943.3 (26%)	National Median Site EUI (kBtu/ft²)	63
Electric - Solar (kBtu)	1,184,088.8 (25%)	National Median Source EUI (kBtu/ft²)	93.9
Natural Gas (kBtu) Total Energy (kBtu)	2,379,712 (50%) 4,808,744.1	% Diff from National Median Source EUI	-11.2%
Energy Intensity		Emissions (based on site energy use)	
Site (kBtu/ft²) Source (kBtu/ft²)	55.9 83.4	Greenhouse Gas Emissions (Metric Tons CO2e)	252.5
		Power Generation Plant or Distribution Atlantic City Electric Co	Utility:
Note: All values are annualized to a	12-month period. Source Energy includ	es energy used in generation and transmission to enable an e	equitable assessment.

Summary of All Associated Energy Meters

The following meters are associated with the property, meaning that they are added together to get the total energy use for the property. Please see additional tables in this checklist for the exact meter consumption values. **Note: please review all meter entries, making note of any unusual entries, and, if they are correct, provide a manual note to explain.**

entries, making note of any unusual entries, and, if they are correct, provide a manual note to explain.					
Meter Name	Fuel Type	Start Date	End Date	Ass	sociated With:
Electric Solar Meter	Electric - Solar	02/21/2019	In Use	Sch	negat Township nool District; Cecil Collins Elementary nool
Electric Grid Meter	Electric - Grid	01/26/2019	In Use	Sch S. (negat Township nool District; Cecil Collins Elementary nool
Natural Gas	Natural Gas	01/31/2019	In Use	Sch S. (negat Township nool District; Cecil Collins Elementary nool
Total Energy Use Do the meters show	n above account for the	total energy use of this p	property during the	☐ Yes	□No
reporting period of the	his application?			☐ Yes	□No
	e include all fuel types at rator fuel oil have been e		o additional fuels such	as	
On-Site Solar and Wi	nd Energy			☐ Yes	□No

Are all on-site solar ar must be reported.	nd wind installations rep	orted in this list (if present)? A	II on-site systems	
Notes:				
Electric - Solar Me	ter: Electric Sola	r Meter (kWh (thousa	nd Watt-hours))	
Associated With: Bar	negat Township Sc	hool District; Cecil S. Co	llins Flementary Sch	nool
			Energy	
Start Date	End Date	Energy Used Onsite	Exported Offsite	REC Ownership
02/21/2019	03/22/2019	32,055.53 ← estimate	0	Owned
03/23/2019	04/22/2019	37,424 ← estimate	0	Owned
04/23/2019	05/22/2019	41,164.39 ← estimate	0	Owned
05/23/2019	06/20/2019	39,673.01 ← estimate	0	Owned
06/21/2019	07/22/2019	41,224.2 ← estimate	0	Owned
07/23/2019	08/21/2019	37,473.59 ← estimate	0	Owned
08/22/2019	09/20/2019	31,767.1 ← estimate	0	Owned
09/21/2019	10/23/2019	25,064.58 ← estimate	0	Owned
10/24/2019	11/21/2019	18,192.1 ← estimate	0	Owned
11/22/2019	12/20/2019	16,014.91 ← estimate	0	Owned
12/21/2019	01/21/2020	19,600.8 ← estimate	0	Owned
01/22/2020	02/22/2020	23,623.6 ← estimate	0	Owned
	Wat	ll Consumption (kWh (tho -hours)):		363,277.81
	Tota Btu)	l Consumption (kBtu (tho):	ousand	1,239,503.9
Total Energy Consum	nption for this Met	er	□ Y	es 🗌 No
through this meter tha		nclude consumption of all eneons for the reporting period of wed by the property)?		

Notes:			
Electric - Grid Meter: E	lectric Grid Meter (kWh	n (thousand Watt-hours))
Associated With: Barnage	at Township School District	; Cecil S. Collins Elementary	/ School
Start Date	End Date	Usage	Green Power?
01/26/2019	02/26/2019	37,134	No
02/27/2019	03/27/2019	28,142	No
03/28/2019	04/25/2019	21,634	No
04/26/2019	05/28/2019	21,921	No
05/29/2019	06/26/2019	24,931	No
06/27/2019	07/26/2019	27,975	No
07/27/2019	08/27/2019	28,853	No
08/28/2019	09/25/2019	26,280	No
09/26/2019	10/28/2019	31,419	No
10/29/2019	11/25/2019	35,781	No
11/26/2019	12/26/2019	38,052 ← estimate	No
12/27/2019	01/24/2020	40,323	No
01/25/2020	02/25/2020	42,924	No
01/20/2020		on (kWh (thousand	
	Watt-hours)):	on (mm (mododna	405,369
	Total Consumpti	on (kBtu (thousand	1,383,119
	Btu)):		1,000,119
Total Francis Consumentia	un for this Mater		□Vaa □Na
Total Energy Consumption	on for this weter		Yes No
Do the fuel consumption tot	als shown above include consum	nption of all energy tracked	
	ct energy calculations for the repone utility bills received by the prop		
(i.e., do the enthes match th	ie dulity bills received by the prop	perty)?	
Notes:			

Natural Gas Meter: Natural Gas (therms) Associated With: Barnegat Township School District; Cecil S. Collins Elementary School **End Date Start Date** Usage 01/31/2019 03/04/2019 4,198 € estimate 03/04/2019 04/01/2019 4,313.1 04/01/2019 05/03/2019 1,557.6 05/03/2019 06/05/2019 281.07 06/05/2019 07/03/2019 106.8 07/03/2019 08/02/2019 71.15 08/02/2019 08/30/2019 77.31 08/30/2019 09/26/2019 203.2 09/26/2019 11/01/2019 781.49 11/01/2019 11/27/2019 2,952.6 11/27/2019 01/03/2020 5,202.9 01/03/2020 01/30/2020 3,920.69 01/30/2020 4,198.4 03/02/2020 **Total Consumption (therms):** 27,864.31 Total Consumption (kBtu (thousand 2,786,431 Btu)): Total Energy Consumption for this Meter ☐ Yes ☐ No Do the fuel consumption totals shown above include consumption of all energy tracked through this meter that affect energy calculations for the reporting period of this application (i.e., do the entries match the utility bills received by the property)? Notes: 4. Signature & Stamp of Verifying Licensed Professional (Name) visited this site on _____ (Date). Based on the conditions observed at the time of the visit to this property, I verify that the information contained within this application is accurate and in accordance with the Licensed Professional Guide. Signature _____

Date	
Licensed Professional	
, ()	
· · · · · · · · · · · · · · · · · · ·	
NOTE: When applying for the ENERGY STAR, the signature of the Verifying Professional must match the stamp.	
, ,	Professional Engineering Stamp


ENERGY STAR® Energy Performance Scorecard

61

out of 100

Cecil S. Collins Elementary School

For Year Ending	January 31, 2020
Property Address	570 Barnegat Blvd. North Barnegat, New Jersey 08005
Primary Function	K-12 School
Gross Floor Area (ft²)	86,000
Year built	1980
Energy Use per sq. ft.*	55.9 kBtu

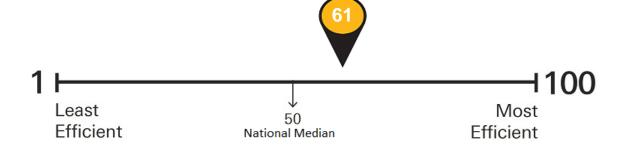

What is the ENERGY STAR Score?

The ENERGY STAR score rates commercial building's energy performance relative to similar buildings nationwide. Expressed as a number on a simple 1-100 scale, the score rates performance on a percentile basis: a building with a score of 50 performs better than 50% of its peers. Higher scores mean better energy efficiency, resulting in less energy use and fewer greenhouse gas emissions. If a 1-100 score for a specific building type has not been developed, Site Energy Use Intensity (EUI) will be displayed on this scorecard.

Learn more at: energystar.gov/scorecard

*Site energy use



Date Generated: May 22, 2020



ENERGY STAR[®] Statement of Energy **Performance**



Cecil S. Collins Elementary School

Primary Property Type: K-12 School Gross Floor Area (ft²): 86,000

Built: 1980

ENERGY STAR® Score¹

For Year Ending: January 31, 2020 Date Generated: May 22, 2020

1. The ENERGY STAR climate and business		ent of a building's energy	y efficiency as compared with similar buildings i	nationwide, adjusting for
Property & Cor	tact Information			
Property Addres Cecil S. Collins El 570 Barnegat Blv Barnegat, New Je	ementary School d. North	Property Owner	Primary Contact	
Property ID: 1049	97415			
Energy Consur	nption and Energy Us	se Intensity (EUI)		
Site EUI 55.9 kBtu/ft² Source EUI 83.4 kBtu/ft²	Annual Energy by Fud Electric - Grid (kBtu) Electric - Solar (kBtu) Natural Gas (kBtu)	1,244,943 (26%) 1,184,089 (25%)	National Median Comparison National Median Site EUI (kBtu/ft²) National Median Source EUI (kBtu/ft²) % Diff from National Median Source EUI Annual Emissions Greenhouse Gas Emissions (Metric Ton CO2e/year)	
Signature & S	Stamp of Verifying	g Professional	00 <u>1</u> 0,700.7	
I	(Name) verify tha	at the above informatio	n is true and correct to the best of my know	vledge.
LP Signature:	sional	Date:		
, ()				
			l Professional Engineer or Regi Architect Stamp	stered



ENERGY STAR® Data Verification Checklist

68

ENERGY STAR ® Score¹

Lillian M. Dunfee Elementary School

Registry Name: Lillian M. Dunfee Elementary School

Property Type: K-12 School Gross Floor Area (ft²): 70,817

Built: 1974

For Year Ending: Jan 31, 2020 Date Generated: May 22, 2020

1. The ENERGY STAR score is a 1-to-100 assessment of a building's energy efficiency as compared with similar building nationwide, adjusting for climate and business activity.

Property & Contact Informa	tion	
Property Address Lillian M. Dunfee Elementary School 128 Barnegat Blvd. Barnegat, New Jersey 08005	Property Owner	Primary Contact
Property ID: 10497364		

1. Review of Whole Property Characteristics

Basic Property Information		
1) Property Name: Lillian M. Dunfee Elementary School Is this the official name of the property?	☐ Yes ☐ No	
If "No", please specify: 2) Property Type: K-12 School Is this an accurate description of the primary use of this property?	☐ Yes ☐ No	
3) Location: 128 Barnegat Blvd. Barnegat, New Jersey 08005	☐ Yes ☐ No	
Is this correct and complete?		
4) Gross Floor Area: 70,817 ft ²	☐ Yes ☐ No	

Is value an accurate account of the gross floor area for the property?		
5) Average Occupancy (%): 85	Yes	□No
Is this occupancy percentage accurate for the entire 12 month period being assessed?		
6) Number of Buildings: 1	Yes	□No
Does this number accurately represent all structures?		
7) Whole Property Verification:	Yes	□No
Does this application represent the entire property? If any space or energy use has been excluded from this property, please describe it in the notes section below.		
Notes:		
Indoor Environmental Quality		
1) Outdoor Air Ventilation		es No
Were measurements and/or calculations taken and recorded under normal building operatir conditions using an allowable method as described in the Licensed Professional's Guide which demonstrate this property meets the minimum ventilation rates according to ANSI/ASHRAE Standard 62?	ng	
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit measurements will result in a denial of the application.]	it	
2) Thermal Environmental Conditions		es No
Were measurements taken and recorded per the Licensed Professional's Guide which demonstrate this property meets the acceptable thermal environmental conditions according to ANSI/ASHRAE Standard 55, Thermal Environmental Conditions for Human Occupancy?	9	
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit measurements will result in a denial of the application.]	t	
3) Illumination		es No
Were measurements taken and recorded per the LP Guide which demonstrate this property meets minimum recommended illumination levels according to the most recent version of the Illuminating Engineering Society of North America (IESNA) Lighting Handbook?		
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit	t	

Notes:			

2. Review of Property Use Details

K-12 School: Building Use				
This Use Detail is used to calculate the 1-100 ENERGY STAR Score.				
★1) Gross Floor Area: 70,817 ft²	Yes	□No		
Is this the total size, as measured between the outside surface of the exterior walls of the building(s)? This includes all areas inside the building(s) such as: occupied tenant areas, common areas, meeting areas, break rooms, restrooms, elevator shafts, mechanical equipment areas, and storage rooms. Gross Floor Area should not include interstitial plenum space between floors, which may house pipes and ventilation. Gross Floor Area is not the same as rentable, but rather includes all area inside the building(s). Leasable space would be a sub-set of Gross Floor Area. In the case where there is an atrium, you should count the Gross Floor Area at the base level only. Do not increase the size to accommodate open atrium space at higher levels. The Gross Floor Area should not include any exterior spaces such as balconies or exterior loading docks and driveways.				
2) High School: No	Yes	□No		
Is this is the correct answer to whether the property is a high school (teaching grades 10, 11, and/or 12)? If the property teaches to high school students at all, then it is a high school. For example, if the school teaches grades K-12 (elementary/middle and high school), then it is considered a high school.				
☆ 3) Number of Workers on Main Shift: 40	Yes	□No		
Is this the number of workers present during the main shift? Note that this is not a total count of workers, but rather a count of workers who are present at the same time. For example, if there are two daily eight hour shifts of 100 workers each, the Number of Workers on Main Shift value is 100. Number of Workers on Main Shift may include employees of the property, sub-contractors who are onsite regularly, and volunteers who perform regular onsite tasks. Number of Workers should not include visitors to the buildings such as clients, customers, or patients.				
4) Student Seating Capacity: 387		☐ No		
Is this the maximum number of students for which the school was designed? This should include the seating capacity of the entire school. If portable classrooms have been added to the school, include the capacity of these classrooms, as they expand the overall capacity of the school.				
5) Months in Use: 9	☐ Yes	☐ No		
Is this the total number of months that the property is open for standard activities?				
★ 6) Weekend Operation: No	☐ Yes	☐ No		

Is this the correct answer to whether the property includes regular activities on the weekend beyond the scope of maintenance, cleaning, and security personnel? Weekend activity includes any time when the property is used for classes, performances, or other school or community activities, on one or both days of the weekend during one or more seasons of the year.		
7) Number of Computers: 123.93 ← default	☐ Yes	□No
Is this the total number of desktop computers, laptops, and data servers at the property? This number should not include tablet computers, such as iPads, or any other types of office equipment. The count should only reflect computers that are owned by the school. It should not include any computers that are brought onsite by students or staff.		
★8) Cooking Facilities: 100% Yes	☐ Yes	☐ No
Is this the correct answer to whether the property has a commercial cooking area designed to provide and serve food to occupants and/or visitors? Commercial kitchens include restaurants and cafeterias, but not employee break room kitchens.		
9) Gross Floor Area Used for Food Preparation: 0 ft² ← default	Yes	☐ No
Is this the correct Gross Floor Area Used for Food Preparation? It is defined as the total size of all large/commercial kitchen areas used for the storage and preparation of food. It is a subset of the property Gross Floor Area. It should not include small kitchens, employee break rooms/pantries, concession stands, or service and seating areas.		
10) Number of Walk-in Refrigeration/Freezer Units: 1	☐ Yes	☐ No
Is this the total count of walk-in units at the property? The Number of Walk-in Refrigeration/Freezer Units is the total count of walk-in units at the property. Walk-in Refrigeration/Freezers are large enough for a person to actually walk into. They may or may not have a door, plastic strips, or other flexible covers.		
☆ 11) Percent That Can Be Heated: 100	Yes	☐ No
Is this the total percentage of the property that can be heated by mechanical equipment?		
★ 12) Percent That Can Be Cooled: 80	Yes	☐ No
Is this the total percentage of the property that can be cooled by mechanical equipment? This includes all types of cooling from central air to individual window units.		
13) Gymnasium Floor Area: 0 ft² ← default	☐ Yes	☐ No
Is this the correct floor area for the gymnasium, including gymnasium/athletic areas, spectator areas, locker rooms, and other associated spaces?		
14) School District: Barnegat Twp	☐ Yes	☐ No
Is this the administrative school district in which the property is located?		
Notes:		

3. Review of Energy Consumption

Data Overview			
Site Energy Use Summary Electric - Solar (kBtu) Electric - Grid (kBtu) Natural Gas (kBtu) Total Energy (kBtu)	206,820.6 (6%) 1,282,291.3 (40%) 1,700,154.4 (53%) 3,189,266.3	National Median Comparison National Median Site EUI (kBtu/ft²) National Median Source EUI (kBtu/ft²) % Diff from National Median Source EUI	55 96.3 -18.2%
Energy Intensity Site (kBtu/ft²) Source (kBtu/ft²)	45 78.8	Emissions (based on site energy use) Greenhouse Gas Emissions (Metric Tons CO2e)	220.2
		Power Generation Plant or Distribution Atlantic City Electric Co	Utility:
Note: All values are annualized to a 12-month period. Source Energy includes energy used in generation and transmission to enable an equitable assessment.			

Summary of All Associated Energy Meters

The following meters are associated with the property, meaning that they are added together to get the total energy use for the property. Please see additional tables in this checklist for the exact meter consumption values. **Note: please review all meter entries, making note of any unusual entries, and, if they are correct, provide a manual note to explain.**

entries, making note of any unusual entries, and, if they are correct, provide a manual note to explain.					
Meter Name	Fuel Type	Start Date	End Date	Ass	sociated With:
Electric Grid Meter	Electric - Grid	01/26/2019	In Use	Ele Bar	an M. Dunfee mentary School; negat Township nool District
Natural Gas	Natural Gas	01/31/2019	In Use	Ele Bar	an M. Dunfee mentary School; negat Township nool District
Electric Solar Meter	Electric - Solar	02/21/2019	In Use	Ele Bar	an M. Dunfee mentary School; negat Township nool District
Total Energy Use Yes No Do the meters shown above account for the total energy use of this property during the				□No	
reporting period of this application? Additional Fuels Do the meters above include all fuel types at the property? That is, no additional fuels such as district steam, generator fuel oil have been excluded.					
On-Site Solar and Wind Energy Yes No				☐ No	

Are all on-site solar and win must be reported.	d installations reported in this lis	st (if present)? All on-site systems	
Notes:			
Electric - Grid Meter: E	lectric Grid Meter (kW	h (thousand Watt-hours)	
	·	ool; Barnegat Township Scho	
Start Date	End Date	Usage	Green Power?
01/26/2019	02/26/2019	50,846	No
02/27/2019	03/27/2019	35,159	No
03/28/2019	04/25/2019	24,607	No
04/26/2019	05/28/2019	25,304	No
05/29/2019	06/26/2019	25,749	No
06/27/2019	07/26/2019	23,056	No
07/27/2019	08/27/2019	26,440	No
08/28/2019	09/25/2019	25,781	No
09/26/2019	10/28/2019	32,823	No
10/29/2019	11/25/2019	31,565	No
11/26/2019	12/26/2019	35,128 € estimate	No
12/27/2019	01/24/2020	38,691	No
01/25/2020	02/25/2020	46,641	No
	Total Consumpt Watt-hours)):	tion (kWh (thousand	421,790
	Total Consumpt Btu)):	tion (kBtu (thousand	1,439,147.5
otal Energy Consumptio	on for this Meter		☐ Yes ☐ No

Do the fuel consumption totals shown above include consumption of all energy tracked through this meter that affect energy calculations for the reporting period of this application (i.e., do the entries match the utility bills received by the property)?

Notes:		
Natural Gas Meter: Natural Ga	as (therms)	
Associated With: Lillian M. Dunfee	e Elementary School; Barnegat Township	School District
Start Date	End Date	Usage
01/31/2019	03/06/2019	2,632 € estimate
03/06/2019	04/03/2019	2,691
04/03/2019	05/07/2019	1,500.3
05/07/2019	06/04/2019	564.5
06/04/2019	07/08/2019	285.01
07/08/2019	08/05/2019	213.4
08/05/2019	08/29/2019	115.3
08/29/2019	09/27/2019	46.3
09/27/2019	11/01/2019	639.7
11/01/2019	12/02/2019	2,569.8
12/02/2019	01/06/2020	3,317.6 € estimate
01/06/2020	01/31/2020	2,419.15
01/31/2020	03/02/2020	2,631.78
	Total Consumption (therms):	19,625.84
	Total Consumption (kBtu (thousand Btu)):	1,962,584
Total Energy Consumption for th	is Meter	☐ Yes ☐ No
	above include consumption of all energy tracked calculations for the reporting period of this applicatells received by the property)?	tion
Notes:		

Electric - Solar Meter: Electric Solar Meter (kWh (thousand Watt-hours))

Associated With: Lillian M. Dunfee Elementary School; B	Barnegat Township School District
---	-----------------------------------

Associated With: Lillian M. Dunfee Elementary School; Barnegat Township School District				
Start Date	End Date	Energy Used Onsite	Energy Exported Offsite	REC Ownership
02/21/2019	03/22/2019	5,634.6 ← estimate	0	Owned
03/23/2019	04/22/2019	6,248.52 ← estimate	0	Owned
04/23/2019	05/22/2019	6,540.6 ← estimate	0	Owned
05/23/2019	06/20/2019	6,549.3 ← estimate	0	Owned
06/21/2019	07/22/2019	6,718.4 ← estimate	0	Owned
07/23/2019	08/21/2019	6,229.1 ← estimate	0	Owned
08/22/2019	09/20/2019	5,541.35 ← estimate	0	Owned
09/21/2019	10/23/2019	4,717 ← estimate	0	Owned
10/24/2019	11/21/2019	3,743.1 ← estimate	0	Owned
11/22/2019	12/20/2019	3,547.48 ← estimate	0	Owned
12/21/2019	01/21/2020	3,785.45 ← estimate	0	Owned
01/22/2020	02/22/2020	4,354.4 ← estimate	0	Owned
		al Consumption (kWh (the t-hours)):	ousand	63,609.3
	Total Consumption (kBtu (thousand Btu)):			217,034.9
otal Energy Consumption for this Meter			es 🗌 No	
Do the fuel consumption totals shown above include consumption of all energy tracked through this meter that affect energy calculations for the reporting period of this application (i.e., do the entries match the utility bills received by the property)?				
Notes:				

4. Signature & Stamp of Verifying Licensed Professional

Signature _____

4. Signature & Stamp of Vernying Licenseu Professional				
(Name) visited this site on of the visit to this property, I verify that the information cowith the Licensed Professional Guide.	(Date). Based on the conditions observed at the time ontained within this application is accurate and in accordance			

Date	
Licensed Professional	
, ()	
· · · · · · · · · · · · · · · · · · ·	
NOTE: When applying for the ENERGY STAR, the signature of the Verifying Professional must match the stamp.	
, ,	Professional Engineering Stamp


ENERGY STAR[®] Energy Performance Scorecard



out of 100

Lillian M. Dunfee Elementary School

For Year Ending	January 31, 2020
Property Address	128 Barnegat Blvd. Barnegat, New Jersey 08005
Primary Function	K-12 School
Gross Floor Area (ft²)	70,817
Year built	1974
Energy Use per sq. ft.*	45 kBtu

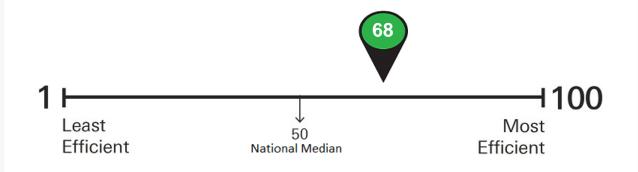

What is the ENERGY STAR Score?

The ENERGY STAR score rates commercial building's energy performance relative to similar buildings nationwide. Expressed as a number on a simple 1-100 scale, the score rates performance on a percentile basis: a building with a score of 50 performs better than 50% of its peers. Higher scores mean better energy efficiency, resulting in less energy use and fewer greenhouse gas emissions. If a 1-100 score for a specific building type has not been developed, Site Energy Use Intensity (EUI) will be displayed on this scorecard.

Learn more at: energystar.gov/scorecard

Date Generated: May 22, 2020

*Site energy use





ENERGY STAR[®] Statement of Energy **Performance**

Lillian M. Dunfee Elementary School

Primary Property Type: K-12 School Gross Floor Area (ft²): 70,817

Built: 1974

ENERGY STAR® Score¹

For Year Ending: January 31, 2020 Date Generated: May 22, 2020

1. The ENERGY STAI climate and business		ent of a building's energy	efficiency as compared	d with similar buildings nation	wide, adjusting for
Property & Cor	ntact Information				
Property Address Lillian M. Dunfee Elementary School 128 Barnegat Blvd. Barnegat, New Jersey 08005 Property ID: 10497364		Property Owner	_	Primary Contact	
Energy Consur	mption and Energy Us	se Intensity (EUI)			
Site EUI 45 kBtu/ft² Source EUI 78.8 kBtu/ft²	Annual Energy by Fue Electric - Solar (kBtu) Electric - Grid (kBtu) Natural Gas (kBtu)	206,821 (6%) 1,282,291 (40%)	% Diff from National Annual Emissions	ite EUI (kBtu/ft²) ource EUI (kBtu/ft²) al Median Source EUI	55 96.3 -18% 220
Signature & S	Stamp of Verifying	g Professional			
1	(Name) verify tha	at the above information	is true and correct t	o the best of my knowledge	Э.
LP Signature: Licensed Profes	ssional	Date:			
			Profession	nal Engineer or Registere	d

(if applicable)



ENERGY STAR® Data Verification Checklist

41

ENERGY STAR ® Score¹

Joseph T. Donahue Elementary School

Registry Name: Joseph T. Donahue Elementary School

Property Type: K-12 School Gross Floor Area (ft²): 72,402

Built: 2008

For Year Ending: Jan 31, 2020 Date Generated: May 22, 2020

1. The ENERGY STAR score is a 1-to-100 assessment of a building's energy efficiency as compared with similar building nationwide, adjusting for climate and business activity.

Property & Contact Information					
Property Address Joseph T. Donahue Elementary School 200 Bengal Boulevard Barnegat, New Jersey 08005	Property Owner	Primary Contact			
Property ID: 10497412					

1. Review of Whole Property Characteristics

Basic Property Information		
1) Property Name: Joseph T. Donahue Elementary School Is this the official name of the property?	☐ Yes ☐ No	
If "No", please specify: 2) Property Type: K-12 School Is this an accurate description of the primary use of this property?	☐ Yes ☐ No	
3) Location: 200 Bengal Boulevard Barnegat, New Jersey 08005	☐ Yes ☐ No	
Is this correct and complete?	□ Yes □ No	
4) Gross Floor Area: 72,402 ft ²	∐ Yes No	

Is value an accurate account of the gross floor area for the property?		
5) Average Occupancy (%): 85	☐ Yes	□No
Is this occupancy percentage accurate for the entire 12 month period being assessed?		
6) Number of Buildings: 1	Yes	□No
Does this number accurately represent all structures?		
7) Whole Property Verification:	Yes	□No
Does this application represent the entire property? If any space or energy use has been excluded from this property, please describe it in the notes section below.		
Notes:		
Indoor Environmental Quality		
1) Outdoor Air Ventilation		es No
Were measurements and/or calculations taken and recorded under normal building operatir conditions using an allowable method as described in the Licensed Professional's Guide which demonstrate this property meets the minimum ventilation rates according to ANSI/ASHRAE Standard 62?	ng	
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit measurements will result in a denial of the application.]	it	
2) Thermal Environmental Conditions		es No
Were measurements taken and recorded per the Licensed Professional's Guide which demonstrate this property meets the acceptable thermal environmental conditions according to ANSI/ASHRAE Standard 55, Thermal Environmental Conditions for Human Occupancy?	9	
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit measurements will result in a denial of the application.]	t	
3) Illumination		es No
Were measurements taken and recorded per the LP Guide which demonstrate this property meets minimum recommended illumination levels according to the most recent version of the Illuminating Engineering Society of North America (IESNA) Lighting Handbook?		
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit	t	

Notes:			

2. Review of Property Use Details

K-12 School: Building Use		
This Use Detail is used to calculate the 1-100 ENERGY STAR Score.		
★ 1) Gross Floor Area: 72,402 ft²	☐ Yes	□No
Is this the total size, as measured between the outside surface of the exterior walls of the building(s)? This includes all areas inside the building(s) such as: occupied tenant areas, common areas, meeting areas, break rooms, restrooms, elevator shafts, mechanical equipment areas, and storage rooms. Gross Floor Area should not include interstitial plenum space between floors, which may house pipes and ventilation. Gross Floor Area is not the same as rentable, but rather includes all area inside the building(s). Leasable space would be a sub-set of Gross Floor Area. In the case where there is an atrium, you should count the Gross Floor Area at the base level only. Do not increase the size to accommodate open atrium space at higher levels. The Gross Floor Area should not include any exterior spaces such as balconies or exterior loading docks and driveways.		
☆ 2) High School : No	Yes	☐ No
Is this is the correct answer to whether the property is a high school (teaching grades 10, 11, and/or 12)? If the property teaches to high school students at all, then it is a high school. For example, if the school teaches grades K-12 (elementary/middle and high school), then it is considered a high school.		
★ 3) Number of Workers on Main Shift: 40	Yes	No
Is this the number of workers present during the main shift? Note that this is not a total count of workers, but rather a count of workers who are present at the same time. For example, if there are two daily eight hour shifts of 100 workers each, the Number of Workers on Main Shift value is 100. Number of Workers on Main Shift may include employees of the property, sub-contractors who are onsite regularly, and volunteers who perform regular onsite tasks. Number of Workers should not include visitors to the buildings such as clients, customers, or patients.		
4) Student Seating Capacity: 220	☐ Yes	☐ No
Is this the maximum number of students for which the school was designed? This should include the seating capacity of the entire school. If portable classrooms have been added to the school, include the capacity of these classrooms, as they expand the overall capacity of the school.		
5) Months in Use: 9	☐ Yes	☐ No
Is this the total number of months that the property is open for standard activities?		
★ 6) Weekend Operation: No	Yes	☐ No

Is this the correct answer to whether the property includes regular activities on the weekend beyond the scope of maintenance, cleaning, and security personnel? Weekend activity includes any time when the property is used for classes, performances, or other school or community activities, on one or both days of the weekend during one or more seasons of the year.		
7) Number of Computers: 126.7 ← default	☐ Yes	☐ No
Is this the total number of desktop computers, laptops, and data servers at the property? This number should not include tablet computers, such as iPads, or any other types of office equipment. The count should only reflect computers that are owned by the school. It should not include any computers that are brought onsite by students or staff.		
★8) Cooking Facilities: 100% Yes	☐ Yes	☐ No
Is this the correct answer to whether the property has a commercial cooking area designed to provide and serve food to occupants and/or visitors? Commercial kitchens include restaurants and cafeterias, but not employee break room kitchens.		
9) Gross Floor Area Used for Food Preparation: 0 ft² ← default	Yes	☐ No
Is this the correct Gross Floor Area Used for Food Preparation? It is defined as the total size of all large/commercial kitchen areas used for the storage and preparation of food. It is a subset of the property Gross Floor Area. It should not include small kitchens, employee break rooms/pantries, concession stands, or service and seating areas.		
10) Number of Walk-in Refrigeration/Freezer Units: 1	☐ Yes	□No
Is this the total count of walk-in units at the property? The Number of Walk-in Refrigeration/Freezer Units is the total count of walk-in units at the property. Walk-in Refrigeration/Freezers are large enough for a person to actually walk into. They may or may not have a door, plastic strips, or other flexible covers.		
★ 11) Percent That Can Be Heated: 100	Yes	☐ No
Is this the total percentage of the property that can be heated by mechanical equipment?		
★ 12) Percent That Can Be Cooled: 80	Yes	☐ No
Is this the total percentage of the property that can be cooled by mechanical equipment? This includes all types of cooling from central air to individual window units.		
13) Gymnasium Floor Area: 0 ft² ← default	Yes	☐ No
Is this the correct floor area for the gymnasium, including gymnasium/athletic areas, spectator areas, locker rooms, and other associated spaces?		
14) School District: Barnegat Twp	☐ Yes	☐ No
Is this the administrative school district in which the property is located?		
Notes:		

3. Review of Energy Consumption

Data Overview				
Site Energy Use Summary		National Median Comparison		
Natural Gas (kBtu)	1,296,753.7 (34%)	National Median Site EUI (kBtu/ft²)	48.4	
Electric - Solar (kBtu)	459,545.8 (12%)	National Median Source EUI (kBtu/ft²)	96	
Electric - Grid (kBtu) Total Energy (kBtu)	2,048,768.1 (54%) 3,805,067.7	% Diff from National Median Source EUI	8.7%	
Energy Intensity		Emissions (based on site energy use)		
Site (kBtu/ft²) Source (kBtu/ft²)	52.6 104.4	Greenhouse Gas Emissions (Metric Tons CO2e)	276.4	
		Power Generation Plant or Distribution Atlantic City Electric Co	Utility:	
Note: All values are annualized to a 12-month period. Source Energy includes energy used in generation and transmission to enable an equitable assessment.				

Summary of All Associated Energy Meters

The following meters are associated with the property, meaning that they are added together to get the total energy use for the property. Please see additional tables in this checklist for the exact meter consumption values. **Note: please review all meter entries, making note of any unusual entries, and, if they are correct, provide a manual note to explain.**

entries, making note of any unusual entries, and, if they are correct, provide a manual note to explain.					
Meter Name	Fuel Type	Start Date	End Date	Ass	sociated With:
Electric Solar Meter	Electric - Solar	02/21/2019	In Use	Ele Bar	eph T. Donahue mentary School; negat Township nool District
Electric Grid Meter	Electric - Grid	01/26/2019	In Use	Ele Bar	eph T. Donahue mentary School; negat Township nool District
Natural Gas	Natural Gas	01/31/2019	In Use	Ele Bar	eph T. Donahue mentary School; negat Township nool District
Total Energy Use Do the meters shown above account for the total energy use of this property during the reporting period of this application?					
Additional Fuels Do the meters above include all fuel types at the property? That is, no additional fuels such as district steam, generator fuel oil have been excluded.					
On-Site Solar and Wind Energy Yes No					

Are all on-site solar and wind installations reported in this list (if present)? All on-site systems must be reported.				
Notes:				
Electric - Solar Me	ter: Electric Sola	r Meter (kWh (thousa	and Watt-hours))	
Associated With: Jos	seph T. Donahue El	ementary School; Barne	•	I District
Start Date	End Date	Energy Used Onsite	Energy Exported Offsite	REC Ownership
02/21/2019	03/22/2019	12,521.4 ← estimate	0	Owned
03/23/2019	04/22/2019	13,885.61 ← estimate	0	Owned
04/23/2019	05/22/2019	14,534.8 ← estimate	0	Owned
05/23/2019	06/20/2019	14,554 ← estimate	0	Owned
06/21/2019	07/22/2019	14,929.7 ← estimate	0	Owned
07/23/2019	08/21/2019	13,826 ← estimate	0	Owned
08/22/2019	09/20/2019	12,314.11 ← estimate	0	Owned
09/21/2019	10/23/2019	10,482.25 ← estimate	0	Owned
10/24/2019	11/21/2019	8,318.11 ← estimate	0	Owned
11/22/2019	12/20/2019	7,883.2 ← estimate	0	Owned
12/21/2019	01/21/2020	8,412.1 ← estimate	0	Owned
01/22/2020	02/22/2020	9,676.46 ← estimate	0	Owned
		al Consumption (kWh (tho t-hours)):	ousand	141,337.74
	Tota Btu)	al Consumption (kBtu (the)):	ousand	482,244.4
otal Energy Consumption for this Meter				
Do the fuel consumption totals shown above include consumption of all energy tracked through this meter that affect energy calculations for the reporting period of this application (i.e., do the entries match the utility bills received by the property)?				

Page 6 of 9

Notes:			
Flectric - Grid Meter: F	lectric Grid Meter (kWh	n (thousand Watt-hours))
Electric Strainster.		r (modeana Watt nodre)	,
Associated With: Joseph	T. Donahue Elementary So	chool; Barnegat Township S	chool District
Start Date	End Date	Usage	Green Power?
01/26/2019	02/26/2019	83,900	No
02/27/2019	03/27/2019	56,834	No
03/28/2019	04/25/2019	27,146	No
04/26/2019	05/28/2019	32,888	No
05/29/2019	06/26/2019	38,361	No
06/27/2019	07/26/2019	43,920	No
07/27/2019	08/27/2019	53,007	No
08/28/2019	09/25/2019	45,119	No
09/26/2019	10/28/2019	43,093	No
10/29/2019	11/25/2019	53,571	No
11/26/2019	12/26/2019	64,050 ← estimate	No
12/27/2019	01/24/2020	60,425	No
01/25/2020	02/25/2020	63,437	No
	Total Consumpti Watt-hours)):	on (kWh (thousand	665,751
	Total Consumpti Btu)):	on (kBtu (thousand	2,271,542.4
Total Energy Consumption	on for this Meter		☐ Yes ☐ No
Do the fuel consumption to	als shown above include consum	antion of all energy tracked	
through this meter that affect	ct energy calculations for the reponentially the properties of the	orting period of this application	
, ,	, , , , , , , , , , , , , , , , , , ,		
Notes:			

Natural Gas Meter: Natural Gas (therms) Associated With: Joseph T. Donahue Elementary School; Barnegat Township School District **Start Date End Date** Usage 01/31/2019 03/07/2019 2,379 € estimate 03/07/2019 04/05/2019 2,023.68 04/05/2019 05/08/2019 506.08 05/08/2019 06/07/2019 310.8 06/07/2019 07/09/2019 268.3 07/09/2019 08/05/2019 237.19 08/05/2019 09/03/2019 112.9 09/03/2019 10/01/2019 205.59 10/01/2019 11/01/2019 214.43 11/01/2019 12/05/2019 1,973.58 12/05/2019 01/07/2020 2,682.17 01/07/2020 01/31/2020 2,049.71 01/31/2020 03/04/2020 2,378.59 **Total Consumption (therms):** 15,342.02 **Total Consumption (kBtu (thousand** 1,534,202 Btu)): Total Energy Consumption for this Meter ☐ Yes ☐ No Do the fuel consumption totals shown above include consumption of all energy tracked through this meter that affect energy calculations for the reporting period of this application (i.e., do the entries match the utility bills received by the property)? Notes: 4. Signature & Stamp of Verifying Licensed Professional (Name) visited this site on _____ (Date). Based on the conditions observed at the time of the visit to this property, I verify that the information contained within this application is accurate and in accordance with the Licensed Professional Guide. Signature _____

Date	
Licensed Professional	
, ()	
· · · · · · · · · · · · · · · · · · ·	
NOTE: When applying for the ENERGY STAR, the signature of the Verifying Professional must match the stamp.	
, ,	Professional Engineering Stamp

(if applicable)

ENERGY STAR® Energy Performance Scorecard



out of 100

Joseph T. Donahue Elementary School

For Year Ending	January 31, 2020		
Property Address	200 Bengal Boulevard Barnegat, New Jersey 08005		
Primary Function	K-12 School		
Gross Floor Area (ft²)	72,402		
Year built	2008		
Energy Use per sq. ft.*	52.6 kBtu		



What is the ENERGY STAR Score?

The ENERGY STAR score rates commercial building's energy performance relative to similar buildings nationwide. Expressed as a number on a simple 1-100 scale, the score rates performance on a percentile basis: a building with a score of 50 performs better than 50% of its peers. Higher scores mean better energy efficiency, resulting in less energy use and fewer greenhouse gas emissions. If a 1-100 score for a specific building type has not been developed, Site Energy Use Intensity (EUI) will be displayed on this scorecard.

Learn more at: energystar.gov/scorecard

Date Generated: May 22, 2020

*Site energy use





ENERGY STAR[®] Statement of Energy **Performance**

Joseph T. Donahue Elementary School

Primary Property Type: K-12 School Gross Floor Area (ft²): 72,402

Built: 2008

ENERGY STAR®

For Year Ending: January 31, 2020 Date Generated: May 22, 2020

Sco	ore ¹				
The ENERGY STAI climate and business		ent of a building's energy	efficiency as compare	d with similar buildings nation	wide, adjusting for
Property & Cor	ntact Information				
Property Addres		Property Owner		Primary Contact	
200 Bengal Boule Barnegat, New Je		· ()	_	· · · ·	
Property ID: 1049	97412				
Energy Consur	mption and Energy U	se Intensity (EUI)			
Site EUI 52.6 kBtu/ft²	Annual Energy by Fu Natural Gas (kBtu) Electric - Solar (kBtu) Electric - Grid (kBtu)	1,296,754 (34%) 459,546 (12%)			48.4 96 9%
Source EUI 104.4 kBtu/ft²		2,0.0,000 (0.76)	Annual Emissions		276
Signature & S	Stamp of Verifyin	g Professional			
I	(Name) verify that	at the above information	is true and correct	to the best of my knowledg	e.
LP Signature:		Date:	_		\neg
Licensed Profes	ssional				
, ()					
				nal Engineer or Registere	ed
			Architect	Stamn	

(if applicable)



ENERGY STAR® Data Verification Checklist

42

ENERGY STAR ® Score¹

Robert L. Horbelt Elementary School

Registry Name: Robert L. Horbelt Elementary School

Property Type: K-12 School Gross Floor Area (ft²): 80,856

Built: 2001

For Year Ending: Jan 31, 2020 Date Generated: May 22, 2020

1. The ENERGY STAR score is a 1-to-100 assessment of a building's energy efficiency as compared with similar building nationwide, adjusting for climate and business activity.

Property & Contact Information				
Property Address Robert L. Horbelt Elementary School 104 Burr Street Barnegat, New Jersey 08005	Property Owner	Primary Contact		
Property ID: 10497416				

1. Review of Whole Property Characteristics

Basic Property Information		
1) Property Name: Robert L. Horbelt Elementary School Is this the official name of the property? If "No" please specify:	☐ Yes ☐ No	
If "No", please specify: 2) Property Type: K-12 School Is this an accurate description of the primary use of this property?	☐ Yes ☐ No	
3) Location: 104 Burr Street Barnegat, New Jersey 08005	☐ Yes ☐ No	
Is this correct and complete?		
4) Gross Floor Area: 80,856 ft ²	☐ Yes ☐ No	

Is value an accurate account of the gross floor area for the property?		
5) Average Occupancy (%): 85	☐ Yes	□No
Is this occupancy percentage accurate for the entire 12 month period being assessed?		
6) Number of Buildings: 1	Yes	□No
Does this number accurately represent all structures?		
7) Whole Property Verification:	Yes	□No
Does this application represent the entire property? If any space or energy use has been excluded from this property, please describe it in the notes section below.		
Notes:		
Indoor Environmental Quality		
1) Outdoor Air Ventilation		es No
Were measurements and/or calculations taken and recorded under normal building operatir conditions using an allowable method as described in the Licensed Professional's Guide which demonstrate this property meets the minimum ventilation rates according to ANSI/ASHRAE Standard 62?	ng	
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit measurements will result in a denial of the application.]	it	
2) Thermal Environmental Conditions		es No
Were measurements taken and recorded per the Licensed Professional's Guide which demonstrate this property meets the acceptable thermal environmental conditions according to ANSI/ASHRAE Standard 55, Thermal Environmental Conditions for Human Occupancy?	9	
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit measurements will result in a denial of the application.]	t	
3) Illumination		es No
Were measurements taken and recorded per the LP Guide which demonstrate this property meets minimum recommended illumination levels according to the most recent version of the Illuminating Engineering Society of North America (IESNA) Lighting Handbook?		
[NOTE: In the case of an audit of this application, Appendix A: IEQ Measurement Form from the LP Guide, will be required to be completed and submitted to EPA. Failure to submit	t	

Notes:			

2. Review of Property Use Details

K-12 School: Building Use		
This Use Detail is used to calculate the 1-100 ENERGY STAR Score.		
★1) Gross Floor Area: 80,856 ft²	Yes	□No
Is this the total size, as measured between the outside surface of the exterior walls of the building(s)? This includes all areas inside the building(s) such as: occupied tenant areas, common areas, meeting areas, break rooms, restrooms, elevator shafts, mechanical equipment areas, and storage rooms. Gross Floor Area should not include interstitial plenum space between floors, which may house pipes and ventilation. Gross Floor Area is not the same as rentable, but rather includes all area inside the building(s). Leasable space would be a sub-set of Gross Floor Area. In the case where there is an atrium, you should count the Gross Floor Area at the base level only. Do not increase the size to accommodate open atrium space at higher levels. The Gross Floor Area should not include any exterior spaces such as balconies or exterior loading docks and driveways.		
2) High School: No	Yes	□No
Is this is the correct answer to whether the property is a high school (teaching grades 10, 11, and/or 12)? If the property teaches to high school students at all, then it is a high school. For example, if the school teaches grades K-12 (elementary/middle and high school), then it is considered a high school.		
☆ 3) Number of Workers on Main Shift: 40	Yes	□No
Is this the number of workers present during the main shift? Note that this is not a total count of workers, but rather a count of workers who are present at the same time. For example, if there are two daily eight hour shifts of 100 workers each, the Number of Workers on Main Shift value is 100. Number of Workers on Main Shift may include employees of the property, sub-contractors who are onsite regularly, and volunteers who perform regular onsite tasks. Number of Workers should not include visitors to the buildings such as clients, customers, or patients.		
4) Student Seating Capacity: 419	☐ Yes	☐ No
Is this the maximum number of students for which the school was designed? This should include the seating capacity of the entire school. If portable classrooms have been added to the school, include the capacity of these classrooms, as they expand the overall capacity of the school.		
5) Months in Use: 9	☐ Yes	☐ No
Is this the total number of months that the property is open for standard activities?		
☆ 6) Weekend Operation: No	Yes	☐ No

Is this the correct answer to whether the property includes regular activities on the weekend beyond the scope of maintenance, cleaning, and security personnel? Weekend activity includes any time when the property is used for classes, performances, or other school or community activities, on one or both days of the weekend during one or more seasons of the year.		
7) Number of Computers: 141.5 ← default	☐ Yes	☐ No
Is this the total number of desktop computers, laptops, and data servers at the property? This number should not include tablet computers, such as iPads, or any other types of office equipment. The count should only reflect computers that are owned by the school. It should not include any computers that are brought onsite by students or staff.		
★ 8) Cooking Facilities: 100% Yes	☐ Yes	☐ No
Is this the correct answer to whether the property has a commercial cooking area designed to provide and serve food to occupants and/or visitors? Commercial kitchens include restaurants and cafeterias, but not employee break room kitchens.		
9) Gross Floor Area Used for Food Preparation: 0 ft² ← default	Yes	☐ No
Is this the correct Gross Floor Area Used for Food Preparation? It is defined as the total size of all large/commercial kitchen areas used for the storage and preparation of food. It is a subset of the property Gross Floor Area. It should not include small kitchens, employee break rooms/pantries, concession stands, or service and seating areas.		
10) Number of Walk-in Refrigeration/Freezer Units: 1	Yes	☐ No
Is this the total count of walk-in units at the property? The Number of Walk-in Refrigeration/Freezer Units is the total count of walk-in units at the property. Walk-in Refrigeration/Freezers are large enough for a person to actually walk into. They may or may not have a door, plastic strips, or other flexible covers.		
★ 11) Percent That Can Be Heated: 100	Yes	☐ No
Is this the total percentage of the property that can be heated by mechanical equipment?		
★ 12) Percent That Can Be Cooled: 80	Yes	☐ No
Is this the total percentage of the property that can be cooled by mechanical equipment? This includes all types of cooling from central air to individual window units.		
13) Gymnasium Floor Area: 0 ft² ← default	☐ Yes	☐ No
Is this the correct floor area for the gymnasium, including gymnasium/athletic areas, spectator areas, locker rooms, and other associated spaces?		
14) School District: Barnegat Twp	☐ Yes	☐ No
Is this the administrative school district in which the property is located?		
Notes:		

3. Review of Energy Consumption

Data Overview			
Site Energy Use Summary		National Median Comparison	
Electric - Solar (kBtu)	171,241.1 (4%)	National Median Site EUI (kBtu/ft²)	44.2
Electric - Grid (kBtu)	2,395,048.5 (62%)	National Median Source EUI (kBtu/ft²)	94.6
Natural Gas (kBtu) Total Energy (kBtu)	1,271,712.3 (33%) 3,838,001.9	% Diff from National Median Source EUI	7.3%
Energy Intensity		Emissions (based on site energy use)	
Site (kBtu/ft²) Source (kBtu/ft²)	47.5 101.6	Greenhouse Gas Emissions (Metric Tons CO2e)	310.2
		Power Generation Plant or Distribution Atlantic City Electric Co	Utility:
Note: All values are annualized to a 12-month period. Source Energy includes energy used in generation and transmission to enable an equitable assessment.			

Summary of All Associated Energy Meters

The following meters are associated with the property, meaning that they are added together to get the total energy use for the property. Please see additional tables in this checklist for the exact meter consumption values. **Note: please review all meter entries, making note of any unusual entries, and, if they are correct, provide a manual note to explain.**

entries, making note of any unusual entries, and, if they are correct, provide a manual note to explain.					
Meter Name	Fuel Type	Start Date	End Date	As	sociated With:
Electric Grid Meter	Electric - Grid	01/26/2019	In Use	Ele Bai	pert L. Horbelt mentary School; negat Township nool District
Natural Gas	Natural Gas	01/31/2019	In Use	Ele Bai	pert L. Horbelt mentary School; negat Township nool District
Electric Solar Meter	Electric - Solar	02/21/2019	In Use	Ele Bai	pert L. Horbelt mentary School; negat Township nool District
Total Energy Use Do the meters shown above account for the total energy use of this property during the reporting period of this application?					
Additional Fuels Do the meters above include all fuel types at the property? That is, no additional fuels such as district steam, generator fuel oil have been excluded.					
On-Site Solar and Wi	nd Energy			Yes	□ No

Are all on-site solar and wind must be reported.	d installations reported in this lis	t (if present)? All on-site systems	
Notes:			
Electric - Grid Meter: E	lectric Grid Meter (kW	h (thousand Watt-hours	
A i - (- d Midb. D - b d)	Hardralt Flagger to a Oak	al Damas I Tarradia Oal	I District
Associated With: Robert L		· ·	
Start Date	End Date	Usage	Green Power?
01/26/2019	02/26/2019	66,236	No
02/27/2019	03/27/2019	54,408	No
03/28/2019	04/25/2019	43,777	No
04/26/2019	05/28/2019	57,442	No
05/29/2019	06/26/2019	68,530	No
06/27/2019	07/26/2019	67,075	No
07/27/2019	08/27/2019	64,660	No
08/28/2019	09/25/2019	65,440	No
09/26/2019	10/28/2019	62,872	No
10/29/2019	11/25/2019	48,277	No
11/26/2019	12/26/2019	50,427 ← estimate	No
12/27/2019	01/24/2020	52,577	No
01/25/2020	02/25/2020	57,814	No
	Total Consumpt Watt-hours)):	ion (kWh (thousand	759,535
	Total Consumpt Btu)):	ion (kBtu (thousand	2,591,533.4
Total Energy Consumptio	n for this Meter		☐ Yes ☐ No

Do the fuel consumption totals shown above include consumption of all energy tracked through this meter that affect energy calculations for the reporting period of this application (i.e., do the entries match the utility bills received by the property)?

Notes:		
Natural Gas Meter: Natural Ga	s (therms)	
Associated With: Robert L. Horbel	t Elementary School; Barnegat Township	School District
Start Date	End Date	Usage
01/31/2019	03/05/2019	2,507 ← estimate
03/05/2019	04/03/2019	1,952
04/03/2019	05/07/2019	484.93
05/07/2019	06/06/2019	115
06/06/2019	07/08/2019	69.2
07/08/2019	08/06/2019	46.4
08/06/2019	08/30/2019	35.7
08/30/2019	09/28/2019	76.8
09/28/2019	11/04/2019	350.5
11/04/2019	12/03/2019	1,852.1
12/03/2019	01/06/2020	2,850.8
01/06/2020	01/30/2020	2,296
01/30/2020	03/02/2020	2,506.6
	Total Consumption (therms):	15,143.03
	Total Consumption (kBtu (thousand Btu)):	1,514,303
Total Energy Consumption for thi	is Meter	☐ Yes ☐ No
	above include consumption of all energy tracked alculations for the reporting period of this applicat is received by the property)?	ion
Notes:		

Electric - Solar Meter: Electric Solar Meter (kWh (thousand Watt-hours))

SSOCIALEU WILII. INC	DOIL E. HOIDCH EICH	mentary School; Barnega	•	ristrict							
Start Date	End Date	Energy Used Onsite	Energy Exported Offsite	REC Ownership							
02/21/2019	03/22/2019	4,621.2 ← estimate	0	Owned							
03/23/2019	04/22/2019	5,316 ← estimate	0	Owned							
04/23/2019	05/22/2019	6,021.6 ← estimate	0	Owned							
05/23/2019	06/20/2019	5,807 ← estimate	0	Owned							
06/21/2019	07/22/2019	6,038.16 ← estimate	0	Owned							
07/23/2019	08/21/2019	5,434.9 ← estimate	0	Owned							
08/22/2019	09/20/2019	4,575.82 ← estimate	0	Owned							
09/21/2019	10/23/2019	3,637.6 ← estimate	0	Owned							
10/24/2019	11/21/2019	2,811.55 ← estimate	0	Owned							
11/22/2019	12/20/2019	2,258.95 ← estimate	0	Owned							
12/21/2019	01/21/2020	2,619.3 ← estimate	0	Owned							
01/22/2020	02/22/2020	3,346.65 ← estimate	0	Owned							
		al Consumption (kWh (the tt-hours)):	ousand	52,488.73							
	Tot Btu	al Consumption (kBtu (the)):	ousand	179,091.5							
tal Energy Consu	mption for this Me	eter	□Y	es 🗌 No							
through this meter th		include consumption of all end tions for the reporting period of sived by the property)?									
Notes:											

4. Signature & Stamp of Verifying Licensed Professional

Signature _____

4. Digitature & Stamp of Verifying Licenset	
(Name) visited this site on of the visit to this property, I verify that the information conta	、
with the Licensed Professional Guide.	

Date	
Licensed Professional	
, ()	
· · · · · · · · · · · · · · · · · · ·	
NOTE: When applying for the ENERGY STAR, the signature of the Verifying Professional must match the stamp.	
, ,	Professional Engineering Stamp

(if applicable)


ENERGY STAR® Energy Performance Scorecard

42

out of 100

Robert L. Horbelt Elementary School

For Year Ending	January 31, 2020
Property Address	104 Burr Street Barnegat, New Jersey 08005
Primary Function	K-12 School
Gross Floor Area (ft²)	80,856
Year built	2001
Energy Use per sq. ft.*	47.5 kBtu

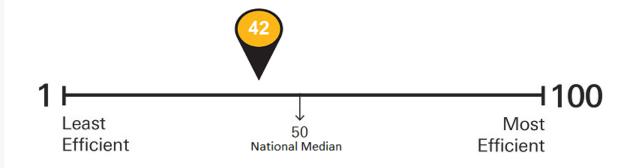

What is the ENERGY STAR Score?

The ENERGY STAR score rates commercial building's energy performance relative to similar buildings nationwide. Expressed as a number on a simple 1-100 scale, the score rates performance on a percentile basis: a building with a score of 50 performs better than 50% of its peers. Higher scores mean better energy efficiency, resulting in less energy use and fewer greenhouse gas emissions. If a 1-100 score for a specific building type has not been developed, Site Energy Use Intensity (EUI) will be displayed on this scorecard.

Learn more at: energystar.gov/scorecard

*Site energy use



Date Generated: May 22, 2020



ENERGY STAR[®] Statement of Energy **Performance**

Robert L. Horbelt Elementary School

Primary Property Type: K-12 School Gross Floor Area (ft²): 80,856

Built: 2001

ENERGY STAR® Score¹

For Year Ending: January 31, 2020 Date Generated: May 22, 2020

1. The ENERGY STAR s climate and business ac		ent of a building's energy	efficiency as compared	d with similar buildings nation	nwide, adjusting for
Property & Conta	ct Information				
Property Address Robert L. Horbelt Ele 104 Burr Street Barnegat, New Jerse	ey 08005	Property Owner	-	Primary Contact	
Property ID: 10497	416 				
Energy Consump	tion and Energy Us	se Intensity (EUI)			
47.5 kBtu/ft ²	Annual Energy by Fue Electric - Solar (kBtu) Electric - Grid (kBtu) Natural Gas (kBtu)	171,241 (4%) 2,395,048 (62%)	% Diff from National Annual Emissions	ite EUI (kBtu/ft²) ource EUI (kBtu/ft²) al Median Source EUI	44.2 94.6 7% 310
Signature & St	amp of Verifying	g Professional			
l	(Name) verify tha	t the above information	is true and correct t	o the best of my knowledg	je.
LP Signature:	onal	Date:	-		
·, ()					
			Profession Architect	nal Engineer or Register Stamp	ed

(if applicable)

Appendix F: GreenTe	ech Proposal	

54 | Page

Barnegat Township School District - Energy Savings Plan

Customer: Barnegat Township School District

						LIGHTING AGE		ENERGY	SAVINGS								ENV	IRONMENTAL IN	ЛРАСТ
Building Name	Program Cost	Utility Rebate	Payback Period	Internal Rate Of Return	KW Usage	Lighting KWH Usage	KW Saved	KWH Saved (Lighting)		KWH Saved	KWH Savings (Lighting)	KWH Savings (Controls)	KWH Savings	Energy Savings	Operation Savings	Total Savings	Reduction in Carbon Dioxide (pounds)	Reduction in Sulfur Dioxide (grams)	Reduction in Nitrogen Oxide (grams)
Barnegat High School	\$437,499	\$78,944	9.3	11%	160	384,484	84	221,463	0	221,463	\$31,005	\$0	\$31,005	\$31,005	\$7,417	\$38,422	332,194	1,240,192	553,657
Russell O Brackman Middle School	\$297,393	\$50,979	7.6	13%	118	294,133	66	178,191	11,402	189,593	\$24,947	\$1,596	\$26,543	\$26,543	\$6,072	\$32,615	284,390	1,061,721	473,983
Robert L Horbelt School	\$177,116	\$27,212	7.7	13%	79	174,622	47	112,898	1,183	114,081	\$15,806	\$166	\$15,971	\$15,971	\$3,481	\$19,452	171,122	638,855	285,203
Joseph T Donahue Elementary School	\$202,047	\$36,301	8.4	12%	76	187,445	40	111,013	298	111,311	\$15,542	\$42	\$15,584	\$15,584	\$4,103	\$19,686	166,967	623,343	278,278
Administration Building	\$8,393	\$1,740	5.5	18%	4	10,472	3	6,474	731	7,204	\$906	\$102	\$1,009	\$1,009	\$195	\$1,203	10,807	40,345	18,011
Transportation / Buildings & Grounds	\$29,421	\$5,876	7.0	14%	14	29,300	8	19,478	497	19,976	\$2,727	\$70	\$2,797	\$2,797	\$554	\$3,351	29,963	111,863	49,939
Totals	\$1,151,869	\$201,052	8.3	12%	451	1,080,458	248	649,516	14,112	663,628	\$90,932	\$1,976	\$92,908	\$92,908	\$21,821	\$114,729	995,443	3,716,319	1,659,071
M & V 50 Points	\$3,847																		
3% Contingency	\$34,261																		
Total	\$1,189,977																		

Program Options Summary

\$17,850

\$1,207,827

_	J			,																
	High School Auditorium	\$110,393	\$1,940	16.3	6%	30	73,220	27	66,646	0	66,646	\$6,665	\$0	\$6,665	\$6,665	\$0	\$6,665	99,970	373,220	166,616
	Middle School Auditorium	\$109,588	\$2,450	31.2	3%	17	42,388	14	34,355	0	34,355	\$3,436	\$0	\$3,436	\$3,436	\$0	\$3,436	51,533	192,388	85,888

PLEASE NOTE:


Bond

Grand Total

We can expect the appraised value of the property to increase by \$1147000 using the Net Operating Income appraisal method at a 10% capitalization rate.

Rebate amounts are estimated and are subject to change without notice.

Sales Tax is not included in this proposal as we consider this project a asset improvement project. Please consult your accountant for further review.

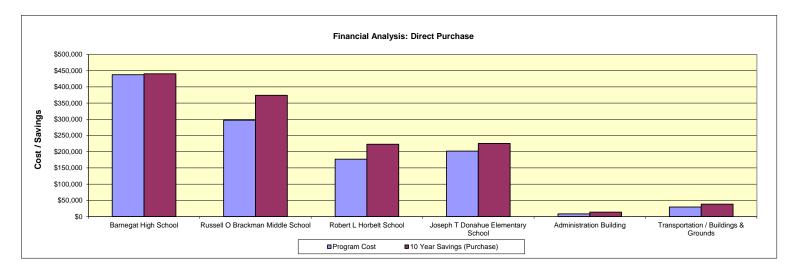

Printed: 7/28/2020

GreenTech LIGHTING

	LOCATION:				EXISTING					PROPOSED				SAVINGS		
Line Ref	Building	Location	Existing Hrs. per	Existing QTY	Evicting Lighting Description	Existing WATT /	Existing KWH	Existing KW	Proposed	Proposed Lighting Description	Proposed WATT /	Proposed	Proposed	NWH Cavad	Total KWH	I/W Sayad
	<u> </u>		Year		Existing Lighting Description	Fixture	Usage	Usage	QTY	Proposed Lighting Description	Fixture			KWH Saved	Saved	KW Saved
	Barnegat High School	Main Entry	3,860		COMPACT FLUORESCENT 23W HW	23	533	0.14		RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	278	0.07	255	255	0.07
	Barnegat High School	Main Lobby - Large Salad Bov	3,860		EXISTING DECORATIVE FIXTURES	0				NO CHANGE	0				0	0.00
	Barnegat High School	Main Lobby - Small Salad Bow			EXISTING DECORATIVE FIXTURES	0				NO CHANGE	0				0	0.00
	Barnegat High School	Main Lobby	3,860		COMPACT FLUORESCENT 23W HW	23	3,906	1.01		RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	2,038	0.53	1,868	1,868	0.48
	Barnegat High School	Main Lobby	3,860		COMPACT FLUORESCENT 23W HW	23	444	0.12		RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	232	0.06	212	212	0.06
	Barnegat High School	Main Office	1,800		3L 4' F25 T8 ELE H BALLAST	83	3,119	1.73		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	1,191	0.66	1,928	1,928	1.07
	Barnegat High School	Main Office	1,800		COMPACT FLUORESCENT 23W HW	23	83	0.05		RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	43	0.02	40	40	0.02
	Barnegat High School	Conference Room	1,800		3L 4' F25 T8 ELE H BALLAST	83	891	0.50		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	340	0.19	551	551	0.31
	Barnegat High School	Assistant Principal	1,800		3L 4' F25 T8 ELE H BALLAST	83	297	0.17		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	113	0.06	184	184	0.10
10	Barnegat High School	Assistant Principal	1,800		3L 4' F25 T8 ELE H BALLAST	83	297	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	113	0.06	184	184	0.10
11	Barnegat High School	Work Room	1,800		3L 4' F25 T8 ELE H BALLAST	83	446	0.25		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	170	0.09	275	275	0.15
	Barnegat High School	Principal	1,800		3L 4' F25 T8 ELE H BALLAST	83	297	0.17		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	113	0.06	184	184	0.10
	Barnegat High School	Bathroom	2,000		2L 2' F17 ELE N BALLAST	34	68	0.03		RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	28	0.01	40	40	0.02
	Barnegat High School	Office #6	1,800		3L 4' F25 T8 ELE H BALLAST	83	297	0.17		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	113	0.06	184	184	0.10
15	Barnegat High School	Attend. Office	1,800		3L 4' F25 T8 ELE H BALLAST	83	149	0.08		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	57	0.03	92	92	0.05
16	Barnegat High School	Rogers Office	1,800		3L 4' F25 T8 ELE H BALLAST	83	297	0.17		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	113	0.06	184	184	0.10
17	Barnegat High School	Office #2	1,800		3L 4' F25 T8 ELE H BALLAST	83	297	0.17		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	113	0.06	184	184	0.10
18	Barnegat High School	Office #5	1,800		3L 4' F25 T8 ELE H BALLAST	83	149	0.08		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	57	0.03	92	92	0.05
19	Barnegat High School	Office #3	1,800	2	3L 4' F25 T8 ELE H BALLAST	83	297	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	113	0.06	184	184	0.10
20	Barnegat High School	Office #4	1,800	2	3L 4' F25 T8 ELE H BALLAST	83	297	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	113	0.06	184	184	0.10
21	Barnegat High School	HALLS & BATHROOMS - Nev		0	0	0			0		0				0	0.00
22	Barnegat High School	End Office	1,800	3	3L 4' F25 T8 ELE H BALLAST	83	446	0.25	3	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	170	0.09	275	275	0.15
23	Barnegat High School	Mail Room	2,500	1	3L 4' F25 T8 ELE H BALLAST	83	206	0.08	1	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	79	0.03	128	128	0.05
24	Barnegat High School	Security	1,800	2	3L 4' F25 T8 ELE H BALLAST	83	297	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	113	0.06	184	184	0.10
25	Barnegat High School	Library	2,500	85	3L 4' F25 T8 ELE H BALLAST	83	17,531	7.01	85	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	6,694	2.68	10,838	10,838	4.34
26	Barnegat High School	Library	2,500	8	COMPACT FLUORESCENT 23W HW	23	460	0.18	8	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	240	0.10	220	220	0.09
27	Barnegat High School	Library	2,500	11	COMPACT FLUORESCENT 23W HW	23	633	0.25	11	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	330	0.13	303	303	0.12
28	Barnegat High School	Library	2,500	6	3L 4' F25 T8 ELE H BALLAST	83	1,238	0.50	6	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	473	0.19	765	765	0.31
29	Barnegat High School	Side Entry	3,860	2	COMPACT FLUORESCENT 23W HW	23	178	0.05	2	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	93	0.02	85	85	0.02
30	Barnegat High School	Periodicals	800	4	3L 4' F25 T8 ELE H BALLAST	83	264	0.33	4	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	101	0.13	163	163	0.20
31	Barnegat High School	Data Room	800	2	2L 4' F25 T8 ELE H BALLAST	55	88	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
32	Barnegat High School	Library 1 / Computers	1,500	9	3L 4' F25 T8 ELE H BALLAST	83	1,114	0.74	9	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	425	0.28	689	689	0.46
33	Barnegat High School	Concession	800	2	3L 4' F25 T8 ELE H BALLAST	83	132	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	50	0.06	82	82	0.10
34	Barnegat High School	Library 2	1,500	17	2L 4' F25 T8 ELE H BALLAST	55	1,403	0.94	17	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	536	0.36	867	867	0.58
35	Barnegat High School	Library Workroom	1,800	3	3L 4' F25 T8 ELE H BALLAST	83	446	0.25	3	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	170	0.09	275	275	0.15
36	Barnegat High School	Library 3	1,500	13	3L 4' F25 T8 ELE H BALLAST	83	1,609	1.07	13	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	614	0.41	995	995	0.66
37	Barnegat High School	Trophy Cases	3,860	9	1L 3' F25 ELE N BALLAST	23	799	0.21	9	RETROFIT 3' 1L LED TUBE / SELF BALLAST	10	347	0.09	452	452	0.12
38	Barnegat High School	Gym Lobby	3,860	74	COMPACT FLUORESCENT 23W HW	23	6,570	1.70	74	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	3,428	0.89	3,142	3,142	0.81
39	Barnegat High School	Gym Lobby - Salad Bowl Fixtu	3,860	4	EXISTING DECORATIVE FIXTURES	0			4	NO CHANGE	0				0	0.00
40	Barnegat High School	Main Gym	3,000	60	EXISTING 2x4 4L T5	234	42,120	14.04	60	RETROFIT 4' 4L T5 LED TUBE / SELF BALLA:	100	18,000	6.00	24,120	24,120	8.04
41	Barnegat High School	Weight Room	3,000	20	3L 4' F25 T8 ELE H BALLAST	83	4,950	1.65	20	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	1,890	0.63	3,060	3,060	1.02
42	Barnegat High School	Trainers Room	2,500	7	3L 4' F25 T8 ELE H BALLAST	83	1,444	0.58	7	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	551	0.22	893	893	0.36
43	Barnegat High School	Trainers Room	2,500	1	2L 2' F17 ELE N BALLAST	34	85	0.03	1	RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	35	0.01	50	50	0.02
44	Barnegat High School	Gym Storage	800	4	2L 4' F25 T8 ELE H BALLAST	55	176	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	67	0.08	109	109	0.14
	Barnegat High School	Mechanical Room	1,500	6	2L 4' F25 T8 ELE H BALLAST	55	495	0.33	6	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	189	0.13	306	306	0.20
46	Barnegat High School	Storage Room	800	1	3L 4' F25 T8 ELE H BALLAST	83	66	0.08	1	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	25	0.03	41	41	0.05
47	Barnegat High School	Storage Room	800	4	2L 4' F25 T8 ELE H BALLAST	55	176	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	67	0.08	109	109	0.14

GreenTecl LIGHTING

	LOCATION:				EXISTING					PROPOSED				SAVINGS		
Line Ref	Building	Location	Existing Hrs. per Year	Existing QTY	Existing Lighting Description	Existing WATT / Fixture	Existing KWH Usage	Existing KW Usage	Proposed QTY	Proposed Lighting Description	Proposed WATT / Fixture	Proposed KWH Usage	Proposed Kw Usage	KWH Saved	Total KWH Saved	KW Saved
48	Barnegat High School	Stage - N/A		0	0	0			0		0				0	0.00
49	Barnegat High School	Mechanical Room M3	1,500	2	2L 4' F25 T8 ELE H BALLAST	55	165	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	63	0.04	102	102	0.07
50	Barnegat High School	Mechanical Room M2	1,500	2	2L 4' F25 T8 ELE H BALLAST	55	165	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	63	0.04	102	102	0.07
51	Barnegat High School	Boys Room	2,000	4	2L 4' F25 T8 ELE H BALLAST	55	440	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	168	0.08	272	272	0.14
52	Barnegat High School	Boys Room	2,000	1	COMPACT FLUORESCENT 23W HW	23	46	0.02	1	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	24	0.01	22	22	0.01
53	Barnegat High School	Boys Room	2,000	2	2L 3' F25 ELE N BALLAST	45	180	0.09	2	RETROFIT 3' 2L LED TUBE / SELF BALLAST	20	80	0.04	100	100	0.05
54	Barnegat High School	Girls Room	2,000	4	2L 4' F25 T8 ELE H BALLAST	55	440	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	168	0.08	272	272	0.14
55	Barnegat High School	Girls Room	2,000	1	COMPACT FLUORESCENT 23W HW	23	46	0.02	1	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	24	0.01	22	22	0.01
56	Barnegat High School	Girls Room	2,000	2	2L 3' F25 ELE N BALLAST	45	180	0.09	2	RETROFIT 3' 2L LED TUBE / SELF BALLAST	20	80	0.04	100	100	0.05
57	Barnegat High School	E101 Entry	3,860	2	COMPACT FLUORESCENT 23W HW	23	178	0.05	2	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	93	0.02	85	85	0.02
58	Barnegat High School	E101 - New LED		0	0	0			0		0				0	0.00
59	Barnegat High School	E103 - New LED		0	0	0			0		0				0	0.00
60	Barnegat High School	E103 Side Rooms	800	3	3L 4' F25 T8 ELE H BALLAST	83	198	0.25	3	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	76	0.09	122	122	0.15
61	Barnegat High School	E105 Class	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
62	Barnegat High School	E105 Class	1,500	5	500 WATT INCAN QUARTZ	500	3,750	2.50	5	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	236	0.16	3,514	3,514	2.34
	Barnegat High School	Storage S7	800	2	2L 4' F25 T8 ELE H BALLAST	55	88	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
64	Barnegat High School	Nurse Office	1,800	9	3L 4' F25 T8 ELE H BALLAST	83	1,337	0.74	9	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	510	0.28	826	826	0.46
65	Barnegat High School	Lockers Lobby	3,860	4	COMPACT FLUORESCENT 23W HW	23	355	0.09	4	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	185	0.05	170	170	0.04
66	Barnegat High School	Boys Lockers	3,000	19	3L 4' F25 T8 ELE H BALLAST	83	4,703	1.57	19	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	1,796	0.60	2,907	2,907	0.97
67	Barnegat High School	Boys Lockers	3,000	1	COMPACT FLUORESCENT 23W HW	23	69	0.02	1	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	36	0.01	33	33	0.01
68	Barnegat High School	Boys Lockers	3,000	2	2L 4' F25 T8 ELE H BALLAST	55	330	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	126	0.04	204	204	0.07
69	Barnegat High School	Boys Lockers	3,000	4	2L 3' F25 ELE N BALLAST	45	540	0.18	4	RETROFIT 3' 2L LED TUBE / SELF BALLAST	20	240	0.08	300	300	0.10
70	Barnegat High School	Coaches Office	2,500	2	3L 4' F25 T8 ELE H BALLAST	83	413	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	158	0.06	255	255	0.10
71	Barnegat High School	Coaches Office	2,500	3	COMPACT FLUORESCENT 23W HW	23	173	0.07	3	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	90	0.04	83	83	0.03
72	Barnegat High School	Gym Side Hall	3,860	4	3L 4' F25 T8 ELE H BALLAST	83	1,274	0.33	4	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	486	0.13	787	787	0.20
73	Barnegat High School	Girls Lockers	3,000	1	COMPACT FLUORESCENT 23W HW	23	69	0.02	1	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	36	0.01	33	33	0.01
	Barnegat High School	Girls Lockers	3,000	2	2L 4' F25 T8 ELE H BALLAST	55	330	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	126	0.04	204	204	0.07
		Girls Lockers	3,000	4	2L 3' F25 ELE N BALLAST	45	540	0.18	4	RETROFIT 3' 2L LED TUBE / SELF BALLAST	20	240	0.08	300	300	0.10
	Barnegat High School	Girls Lockers	3,000	2	3L 4' F25 T8 ELE H BALLAST	83	495	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	189	0.06	306	306	0.10
	Barnegat High School	Girls Lockers	3,000	3	COMPACT FLUORESCENT 23W HW	23	207	0.07	3	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	108	0.04	99	99	0.03
78	Barnegat High School	Wrestling	3,000	20	EXISTING 2x4 4L T5	234	14,040	4.68	20	RETROFIT 4' 4L T5 LED TUBE / SELF BALLA	100	6,000	2.00	8,040	8,040	2.68
	Barnegat High School	Wrestling	3,000	1	COMPACT FLUORESCENT 23W HW	23	138	0.05		RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	72	0.02	66	66	0.02
80	Barnegat High School	S6 Storage	800	6	2L 4' F25 T8 ELE H BALLAST	55	264	0.33	6	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	101	0.13	163	163	0.20
81	Barnegat High School	Athletics	1,800	6	3L 4' F25 T8 ELE H BALLAST	83	891	0.50	6	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	340	0.19	551	551	0.31
82	Barnegat High School	Guidance Entry	1,800	1	COMPACT FLUORESCENT 23W HW	23	41	0.02	1	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	22	0.01	20	20	0.01
83	Barnegat High School	Guidance Conference Room	1,800	4	3L 4' F25 T8 ELE H BALLAST	83	594	0.33	4	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	227	0.13	367	367	0.20
84	Barnegat High School	Janitor JCJ	400	1	2L 4' F25 T8 ELE H BALLAST	55	22	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	8	0.02	14	14	0.03
85	Barnegat High School	Hall Bathroom	2,000	1	2L 2' F17 ELE N BALLAST	34	68	0.03	1	RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	28	0.01	40	40	0.02
		Faculty Dining	1,800	21	2L 4' F25 T8 ELE H BALLAST	55	2,079	1.16	21	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	794	0.44	1,285	1,285	0.71
	Barnegat High School	Upper Mechanical Room	1,500		2L 4' F25 T8 ELE H BALLAST	55	1,815	1.21		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	693	0.46	1,122	1,122	0.75
	Barnegat High School	Upper Mech. Room - Emer Ba		0	0	0			4	EMERGENCY BALLAST LED	0				0	0.00
	Barnegat High School	Data Room 3	800	1	2L 4' F25 T8 ELE H BALLAST	55	44	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	17	0.02	27	27	0.03
	Barnegat High School	Electrical Room	1,500		2L 4' F25 T8 ELE H BALLAST	55	330	0.22		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	126	0.08	204	204	0.14
		Gym #2	3,000		EXISTING 2x4 4L T5	234	16,848	5.62		RETROFIT 4' 4L T5 LED TUBE / SELF BALLA	100	7,200	2.40	9,648	9,648	3.22
	Barnegat High School	Gym Storage	800		2L 4' F25 T8 ELE H BALLAST	55	528	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	202	0.25	326	326	0.41
	Barnegat High School	(2) Hall Bathrooms	2,000		2L 4' F25 T8 ELE H BALLAST	55	660	0.33		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	252	0.13	408	408	0.20
	Barnegat High School	(2) Hall Bathrooms	2,000		2L 3' F25 ELE N BALLAST	45	360	0.18		RETROFIT 3' 2L LED TUBE / SELF BALLAST	20	160	0.08	200	200	0.10

GreenTech LIGHTING

	LOCATION:				EXISTING					PROPOSED				SAVINGS		
Line Ref	Building	Location	Existing Hrs. per Year	Existing QTY	Existing Lighting Description	Existing WATT / Fixture	Existing KWH Usage	Existing KW Usage	Proposed QTY	Proposed Lighting Description	Proposed WATT / Fixture	Proposed KWH Usage	Proposed Kw Usage	KWH Saved	Total KWH Saved	KW Saved
95	Barnegat High School	(2) Hall Bathrooms	2,000	4	2L 2' F17 ELE N BALLAST	34	272	0.14	4	RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	112	0.06	160	160	0.08
96	Barnegat High School	Cafeteria Entry	3,860	6	COMPACT FLUORESCENT 23W HW	23	533	0.14	6	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	278	0.07	255	255	0.07
97	Barnegat High School	S4 Storage	800	2	3L 4' F25 T8 ELE H BALLAST	83	132	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	50	0.06	82	82	0.10
98	Barnegat High School	Student Store	800	3	3L 4' F25 T8 ELE H BALLAST	83	198	0.25	3	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	76	0.09	122	122	0.15
99	Barnegat High School	JC6 Closet	400	2	2L 4' F25 T8 ELE H BALLAST	55	44	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	17	0.04	27	27	0.07
100	Barnegat High School	Kitchen Serving	1,800	12	3L 4' F25 T8 ELE H BALLAST	83	1,782	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	680	0.38	1,102	1,102	0.61
101	Barnegat High School	Kitchen Serving	1,800	6	65 WATT INCAN FLOOD	65	702	0.39	6	RELAMP 9 WATT LED A LAMP S/I	9	97	0.05	605	605	0.34
102	Barnegat High School	Kitchen	2,000	15	3L 4' F25 T8 ELE H BALLAST	83	2,475	1.24	15	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	945	0.47	1,530	1,530	0.77
103	Barnegat High School	Stove Hoods	2,000	4	2L 4' F25 T8 ELE H BALLAST	55	440	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	168	0.08	272	272	0.14
104	Barnegat High School	Lockers / Bathroom	2,000	2	3L 4' F25 T8 ELE H BALLAST	83	330	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	126	0.06	204	204	0.10
105	Barnegat High School	Mop Room	400	1	3L 4' F25 T8 ELE H BALLAST	83	33	0.08	1	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	13	0.03	20	20	0.05
106	Barnegat High School	Coolers	800	6	2 LAMP 4 FT F40 T12 EE / EE	73	350	0.44	6	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	101	0.13	250	250	0.31
	Barnegat High School	Coolers	800	2	60 WATT INCANDESCENT	60	96	0.12	2	RELAMP 9 WATT LED A LAMP S/I	9	14	0.02	82	82	0.10
	Barnegat High School	Facilities	2,500	8	3L 4' F25 T8 ELE H BALLAST	83	1,650	0.66	8	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	630	0.25	1,020	1,020	0.41
	Barnegat High School	West Stairs	3,860	7	2L 4' F25 T8 ELE H BALLAST	55	1,486	0.39	7	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	567	0.15	919	919	0.24
	Barnegat High School	West Stairs	3,860	0	0	0			7	EMERGENCY BALLAST LED	0				0	0.00
	Barnegat High School	West Stairs	3,860	1	3L 4' F25 T8 ELE H BALLAST	83	318	0.08		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	122	0.03	197	197	0.05
	Barnegat High School	Class B213	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,856	1.24	15	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	709	0.47	1,148	1,148	0.77
	Barnegat High School	Prep B211A	1,500	2	3L 4' F25 T8 ELE H BALLAST	83	248	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	95	0.06	153	153	0.10
114	Barnegat High School	Class B212	1,500	15	3L 4' F25 T8 ELE H BALLAST	83	1,856	1.24	15	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	709	0.47	1,148	1,148	0.77
115	Barnegat High School	Prep B210A	1,500	2	3L 4' F25 T8 ELE H BALLAST	83	248	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	95	0.06	153	153	0.10
	Barnegat High School	Class B210	1,500	15	3L 4' F25 T8 ELE H BALLAST	83	1,856	1.24	15	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	709	0.47	1,148	1,148	0.77
	Barnegat High School	Class B211	1,500	15	3L 4' F25 T8 ELE H BALLAST	83	1,856	1.24		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	709	0.47	1,148	1,148	0.77
	Barnegat High School	Class B208	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School	Class B206	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School	Class B209	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School	Class B207	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School	Class B204	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School	Class B203	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School	Class B205	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School	Mens Room	2,000		2L 4' F25 T8 ELE H BALLAST	55	440	0.22		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	168	0.08	272	272	0.14
	Barnegat High School	Mens Room	2,000		2L 3' F25 ELE N BALLAST	45	180	0.09		RETROFIT 3' 2L LED TUBE / SELF BALLAST	20	80	0.04	100	100	0.05
	Barnegat High School	Mens Room	2,000	1	COMPACT FLUORESCENT 23W HW	23	46	0.02	1	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	24	0.01	22	22	0.01
	Barnegat High School	JC4 Closet	400		2L 2' F17 ELE N BALLAST	34	14	0.03	1	RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	6	0.01	8	8	0.02
	Barnegat High School	Faculty Bathroom	2,000	1	2L 2' F17 ELE N BALLAST	34	68	0.03		RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	28	0.01	40	40	0.02
	Barnegat High School	Girls Room	2,000	4	2L 4' F25 T8 ELE H BALLAST	55	440	0.22		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	168	0.08	272	272	0.14
	Barnegat High School	Girls Room	2,000	2	2L 3' F25 ELE N BALLAST	45	180	0.09	2	RETROFIT 3' 2L LED TUBE / SELF BALLAST	20	80	0.04	100	100	0.05
	Barnegat High School	Girls Room	2,000		COMPACT FLUORESCENT 23W HW	23	46	0.02		RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	24	0.01	22	22	0.01
	Barnegat High School	Hall Storage	800		2L 4' F25 T8 ELE H BALLAST	55	132	0.17		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	50	0.06	82	82	0.10
	Barnegat High School	Elevator	3,860		2L 4' F25 T8 ELE H BALLAST	55	425	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	162	0.04	262	262	0.07
	Barnegat High School	Class B202	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School	Class B201	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School	Class C210	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School	Stairs	3,860		2L 4' F25 T8 ELE H BALLAST	55	1,486	0.39		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	567	0.15	919	919	0.24
	Barnegat High School	Stairs	3,860	0	0	0	,			EMERGENCY BALLAST LED	0				0	0.00
	Barnegat High School	Stairs	3,860		COMPACT FLUORESCENT 23W HW	23	178	0.05		RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	93	0.02	85	85	0.02
	Barnegat High School	Girls Room	2,000		2L 4' F25 T8 ELE H BALLAST	55	550	0.28		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	210	0.11	340	340	0.17

GreenTech LIGHTING

	LOCATION:				EXISTING					PROPOSED				SAVINGS		
Line Ref	Building	Location	Existing Hrs. per Year	Existing QTY	Existing Lighting Description	Existing WATT / Fixture	Existing KWH Usage	Existing KW Usage	Proposed QTY	Proposed Lighting Description	Proposed WATT / Fixture	Proposed KWH Usage	Proposed Kw Usage	KWH Saved	Total KWH Saved	KW Saved
142	Barnegat High School	Girls Room	2,000	2	2L 3' F25 ELE N BALLAST	45	180	0.09	2	RETROFIT 3' 2L LED TUBE / SELF BALLAST	20	80	0.04	100	100	0.05
	Barnegat High School	Girls Room	2,000	1	COMPACT FLUORESCENT 23W HW	23	46	0.02	1	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	24	0.01	22	22	0.01
	Barnegat High School	Class C209A	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School	Faculty Bathroom	2,000	1	2L 2' F17 ELE N BALLAST	34	68	0.03	1	RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	28	0.01	40	40	0.02
	Barnegat High School	Janitor Closet	400	1	2L 4' F25 T8 ELE H BALLAST	55	22	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	8	0.02	14	14	0.03
	Barnegat High School	Boys Room	2,000	5	2L 4' F25 T8 ELE H BALLAST	55	550	0.28	5	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	210	0.11	340	340	0.17
	Barnegat High School	Boys Room	2,000	1	2L 2' F17 ELE N BALLAST	34	68	0.03	1	RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	28	0.01	40	40	0.02
	Barnegat High School	Boys Room	2,000	1	COMPACT FLUORESCENT 23W HW	23	46	0.02	1	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	24	0.01	22	22	0.01
	Barnegat High School	Mechanical M5	1,500	8	2L 4' F25 T8 ELE H BALLAST	55	660	0.44	8	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	252	0.17	408	408	0.27
	Barnegat High School	Class C209	1,500	8	3L 4' F25 T8 ELE H BALLAST	83	990	0.66	8	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	378	0.17	612	612	0.41
	Barnegat High School	S17 Storage	800	4	2L 4' F25 T8 ELE H BALLAST	55	176	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	67	0.08	109	109	0.14
	Barnegat High School	Class C208	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School	Class C207	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School	Class C205	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
		Class C206	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School Barnegat High School	Class C200	1,500		3L 4' F25 T8 ELE H BALLAST	83	248	0.99	2	RETROFIT 4'3L LED TUBE / SELF BALLAST	32	95	0.06	153	153	0.10
	Barnegat High School	Class C203	1,500	14	3L 4' F25 T8 ELE H BALLAST	83	1,733	1.16	14	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	662	0.44	1,071	1,071	0.71
	Barnegat High School	Prep Room	1,500	3	3L 4' F25 T8 ELE H BALLAST	83	371	0.25	3	RETROFIT 4'3L LED TUBE / SELF BALLAST	32	142	0.44	230	230	0.71
	· ·	Class C202	1,500	14	3L 4' F25 T8 ELE H BALLAST	83	1,733	1.16	14	RETROFIT 4'3L LED TUBE / SELF BALLAST	32	662	0.09	1,071	1,071	0.13
	Barnegat High School		800		2L 4' F25 T8 ELE H BALLAST	55	1,733	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	67	0.44	109	1,071	0.71
	Barnegat High School Barnegat High School	S16 Storage Stairs #4	3,860		2L 4 F25 T6 ELE FI BALLAST 2L 4' F25 T8 ELE H BALLAST	55	1,486	0.22	7	RETROFIT 4 2L LED TUBE / SELF BALLAST	21	567	0.08	919	919	0.14
		Stairs #4	3,860	0	o Service of Ballasi	0	1,400	0.39	7	EMERGENCY BALLAST LED	0	567	0.15	919	0	0.24
	Barnegat High School		3,860	2	OOMBACT FLUORESCENT 22W LIW	ŭ	470	0.05	2		-	00	0.00	0.5		
	Barnegat High School	Stairs #4	1,500		COMPACT FLUORESCENT 23W HW 3L 4' F25 T8 ELE H BALLAST	23	178 1,485	0.05 0.99		RETROFIT HIGH HAT 12 WATT LED 6 INCH RETROFIT 4' 3L LED TUBE / SELF BALLAST	12 32	93 567	0.02 0.38	85 918	85 918	0.02 0.61
	Barnegat High School	Class C201				83			12 4							
	Barnegat High School	Girls Room	2,000	4	2L 4' F25 T8 ELE H BALLAST	55	440	0.22		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	168	0.08	272	272	0.14
	Barnegat High School	Girls Room	2,000	2	2L 3' F25 ELE N BALLAST COMPACT FLUORESCENT 23W HW	45	180	0.09	2	RETROFIT JI 2L LED TUBE / SELF BALLAST	20 0	80	0.04	100	100	0.05
	Barnegat High School	Girls Room	2,000	1		23	00	0.00	0	RETROFIT HIGH HAT 12 WATT LED 6 INCH	-	00	0.04	40	0	0.00
	Barnegat High School	Faculty Bathroom	2,000	1	2L 2' F17 ELE N BALLAST	34	68	0.03	1	RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	28	0.01	40	40	0.02
	Barnegat High School	Boys Room	2,000	4	2L 4' F25 T8 ELE H BALLAST	55	440	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	168	0.08	272	272	0.14
	Barnegat High School	Boys Room	2,000	2	2L 3' F25 ELE N BALLAST	45	180	0.09	2	RETROFIT 3' 2L LED TUBE / SELF BALLAST	20 0	80	0.04	100	100	0.05
	Barnegat High School Barnegat High School	Boys Room South Stairs	2,000	7	COMPACT FLUORESCENT 23W HW	23	4 400	0.20	0	RETROFIT HIGH HAT 12 WATT LED 6 INCH RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	F07	0.45	040	U	0.00
	Barnegat High School		3,860	0	2L 4' F25 T8 ELE H BALLAST	55	1,486	0.39	7	EMERGENCY BALLAST LED	0	567	0.15	919	919	0.24
		South Stairs	3,860		OOMBACT ELLIODESCENT 22W LIW	0	470	0.05	·		-	00	0.00	0.5	0	0.00
	Barnegat High School	South Stairs	3,860		COMPACT FLUORESCENT 23W HW	23	178	0.05	2	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	93	0.02	85 450	85 450	0.02
	Barnegat High School	Class A204	1,500		3L 4' F25 T8 ELE H BALLAST	83	743	0.50	6	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	284	0.19	459	459	0.31
	Barnegat High School	S11 Storage	800		3L 4' F25 T8 ELE H BALLAST	83	132	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	50	0.06	82 450	82 450	0.10
	Barnegat High School	Class A200	1,500		3L 4' F25 T8 ELE H BALLAST	83	743	0.50	6 4	RETROFIT 4' 3L LED TUBE / SELF BALLAST RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	284	0.19	459 206	459 206	0.31
	Barnegat High School	Class A202	1,500		3L 4' F25 T8 ELE H BALLAST	83	495	0.33			32	189	0.13	306	306 765	0.20
	Barnegat High School	Class A201	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,238	0.83	10	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	473	0.32	765	765	0.51
	Barnegat High School	Class A203	1,500		3L 4' F25 T8 ELE H BALLAST	83	990	0.66	8	RETROFIT 4: 3L LED TUBE / SELF BALLAST	32	378	0.25	612	612	0.41
	Barnegat High School	Class A205	1,500		3L 4' F25 T8 ELE H BALLAST	83	990	0.66	8	RETROFIT 4'3L LED TUBE / SELF BALLAST	32	378	0.25	612	612	0.41
	Barnegat High School	Class A205A	1,500		3L 4' F25 T8 ELE H BALLAST	83	990	0.66	8	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	378	0.25	612	612	0.41
	Barnegat High School	Class A207	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School	Class A209	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School	Class A208	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Barnegat High School	S-15 Storage	800		2L 4' F25 T8 ELE H BALLAST	55	132	0.17	3	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	50	0.06	82	82	0.10
188	Barnegat High School	Class A210	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0

GreenTech LIGHTING

LOCATION: City, State, Zip Code:

Text		LOCATION:		EXISTING							PROPOSED		SAVINGS				
1906		Building	Location	Hrs. per	_		WATT /	KWH	KW		Proposed Lighting Description	WATT /			KWH Saved		KW Saved
191	189	Barnegat High School	Class A212	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
1911	190	Barnegat High School	Class A211	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
1985 Desire find Proved Does Patron 1,500 1 6, FEPS TO, ELE FORLAGE 55 9, 0.00 1 RETROPT FOR LEGE FORLAGE 21 22 22 0.00 31 51	191	Barnegat High School	Class A213	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
19-1 19-1	192	Barnegat High School	EC2 Electrical	1,500	2	2L 4' F25 T8 ELE H BALLAST	55	165	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	63	0.04	102	102	0.07
190 Barrage Flys Stord			Data Room	1,500	1	2L 4' F25 T8 ELE H BALLAST	55	83	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	32	0.02	51	51	0.03
195 Bernings High Storted Novin States 3,800 0 0 0 0 0 0 0 0 0	194	Barnegat High School	Class A214	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
1979 Samogas High School Des Front Hellenge Large School 20 CARTINA DECORATION 23 4.596 1.595 1.59			North Stairs	3,860	7	2L 4' F25 T8 ELE H BALLAST	55	1,486	0.39	7	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	567	0.15	919	919	0.24
1989 Remorphis School 2014 February - Logo S 8, 3990 7 NS INFO RECORATIVE PATURES 0 0 0 0 0 0 0 0 0	196	Barnegat High School	North Stairs	3,860	0	0	0			7	EMERGENCY BALLAST LED	0				0	0.00
1986 Company High School 20x F For Visionary - Large Side 20x S CONTROLE 0 0 0 0 0 0 0 0 0			2nd Floor Hallways	3,860	46	COMPACT FLUORESCENT 23W HW	23	4,084	1.06	46	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	2,131	0.55	1,953	1,953	0.51
199 Sampage High School STELOGR CONTINUED 0 0 0 0 0 0 0 0 0			2nd Floor Hallways - Large Sa		2	EXISTING DECORATIVE FIXTURES	0			2	NO CHANGE	0				0	0.00
200 Benninger High Storloot 0.100 0.	199	Barnegat High School			0	0	0			0		0				0	0.00
201 Bannager High Storol 1506 150 2 1.4 FETS TELET HEALLAST 50 2.60 0.77 2 RETROUTT #5 LED TUBE F SELF PALLAST 22 55 0.06 153 153 153 150				1,500	34	2L 4' F25 T8 ELE H BALLAST	55	2,805	1.87	34	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	1,071	0.71	1,734	1,734	1.16
200 Burreger High School Class B106 1,500 20 4,4°PE TELEH BALLAST 63 2,40°P 1,0°F 2,0°F						3L 4' F25 T8 ELE H BALLAST	83	-				32				, in the second	0.10
200 Semegat High School 0.00 20 8.4°E278 ELE HAULAST 33 2.470 1.590 0.00				1,500	34	2L 4' F25 T8 ELE H BALLAST	55	2,805	1.87	34	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21			1,734	1,734	1.16
Barmaget High Strobol B196 Orline 1,800 2 31.4 F25 T8 ELF HABILAST 83 297 0.17 2 RETROFIT 43 LED TURE / SELF BALLAST 32 113 307 397 397 208 Barmaget High Strobol Class B104 1,500 12 31.4 F25 T8 ELF HABILAST 63 1,465 0.99 12 RETROFIT 43 LED TURE / SELF BALLAST 32 227 0.13 387 397 397 397 397 398 341 0.00 327 328 345 0.99 12 RETROFIT 43 LED TURE / SELF BALLAST 32 567 0.39 0.98 348 0.99 12 RETROFIT 43 LED TURE / SELF BALLAST 32 567 0.39 0.98 348 0.99 12 RETROFIT 43 LED TURE / SELF BALLAST 32 567 0.39 0.98 348 0.99 12 RETROFIT 43 LED TURE / SELF BALLAST 32 567 0.39 0.98 348 0.99 12 RETROFIT 43 LED TURE / SELF BALLAST 32 0.09 12 0.00 0.99 12 RETROFIT 43 LED TURE / SELF BALLAST 32 0.00 0.99 12 0.00 0.99			Class B106	1,500	20	3L 4' F25 T8 ELE H BALLAST	83	-				32					1.02
Berneget High School Big Shudio 1,800 4 31.4 F25 T8 ELEH BALLAST 83 694 0.33 4 RETROFIT 3 LED TUBE / SER PALLAST 32 227 0.13 397							83										0.10
Barnegat High School Class B104 1,500 12 24. FEST SE ELF HALLAST 83 1,485 0,99 12 RETROFIT 4'S LED TUBE / SELF DE NALLAST 32 967 0,38 918 918							83										0.20
																	0.61
Barnegat High School Mene Room 2,000 4 24, Ef 27 Till ELH HALLAST 55 440 0.22 4 RETROFIT 2/LED TUBE / SELF BALLAST 20 80 0.04 710 100																1,741	0.45
Barnegat High School Mens Room 2,000 2 21.7 F25 ELE N BALLAST 45 490 0.09 2 RETROPTT 32 LLED TUBE / SELF BALLAST 20 00 0.04 100					4												0.14
Barnegat High School Mens Room 2,000 1 COMPACT FLUORES CENT 2W HW 23 48 0,02 1 RETROPIT 4/2 LLED TUBE / SELF BALLAST 14 6 0,01 22 22																	0.05
Barnegal High School Jo2 Closes					1		23										0.01
212 Barnegart High School Ladies Room 2,000 4 2,4 °F 25 TB ELE H BALLAST 55 440 0.02 4 RETROFIT ± 2 LLED TUBE / SELE BALLAST 21 168 0.08 272 272 272 273 274 274 275 Barnegart High School Ladies Room 2,000 1 COMPACT FLUORESCENT 23W HW 23 46 0.02 1 RETROFIT ± 2 LLED TUBE / SELE BALLAST 24 0.01 22 22 22 22 22 23 24 24					1											8	0.02
213 Barnegat High School Ladies Room 2,000 2 2,3 F25 ELE N BALLAST 45 180 0.09 2 RETROFIT 3'2 LED TUBE / SELF BALLAST 20 80 0.04 100 100 101 121 123 124 125															272	272	0.14
216 Barnegat High School Ladies Room 2,000 1 COMPACT FLUORESCENT 23W HW 23 46 0.02 1 RETROFIT HIGH HAT 12 WATT LED 6 INCH 12 24 0.01 22 22																	0.05
215 Bamegat High School Faculty Room 2,500 3 COMPACT FLUORESCENT 23W HW 23 173 0.07 3 RETROFIT HIGH HAT 12 WATT LED EINCH 12 90 0.04 83 83 83 216 Bamegat High School Elevator Room 1,500 1 21.4 F257 BE LE H BALLAST 55 83 0.06 1 RETROFIT 4'2 LLED TUBE / SELF BALLAST 21 32 0.02 51 51 218 22 23 23 20.02 51 51 218 23 20.02 218 218 20.02 218 218 20.02 218 218 20.02 218 218 20.02 218					1												0.01
Elevator Room 1,500 1 2,14 F25 T8 ELE H BALLAST 55 83 0.06 1 RETROFIT 4' 2 LL ED TUBE / SELF BALLAST 21 32 0.02 51 51					3												0.03
217 Barnegat High School Electrical Room 1,500 1 2,4 fr 25 T8 ELE H BALLAST 55 83 0.06 1 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 32 0.02 51 51					1												0.03
218 Barnegat High School Data Room #4 1,500 1 2,4 'F25 T8 ELE H BALLAST 55 83 0.06 1 RETROFIT 4' 2, LED TUBE / SELF BALLAST 21 32 0.02 51 51 219 Barnegat High School Class A110 1,500 12 31,4 'F25 T8 ELE H BALLAST 83 1,485 0.99 12 RETROFIT 4' 3, LED TUBE / SELF BALLAST 32 567 0.38 918 918 220 Barnegat High School S12 Storage 800 2 2,4 'F25 T8 ELE H BALLAST 55 88 0.11 2 RETROFIT 4' 3, LED TUBE / SELF BALLAST 32 567 0.38 918 918 221 Barnegat High School Ladies Room 2,000 3 3,4 'F25 T8 ELE H BALLAST 83 495 0.25 3 RETROFIT 4' 3, LED TUBE / SELF BALLAST 21 34 0.04 54 54 222 Barnegat High School Ladies Room 2,000 4 2,4 'F25 T8 ELE H BALLAST 55 440 0.22 4 RETROFIT 4' 2, LED TUBE / SELF BALLAST 21 168 0.08 272 272 223 Barnegat High School Ladies Room 2,000 2 2,3 'F25 ELE N BALLAST 45 180 0.09 2 RETROFIT 3' 2, LED TUBE / SELF BALLAST 20 80 0.04 100 100 224 Barnegat High School Ladies Room 2,000 2 2,3 'F25 ELE N BALLAST 45 180 0.09 2 RETROFIT 3' 3, LED TUBE / SELF BALLAST 20 80 0.04 100 100 225 Barnegat High School Ladies Room 2,000 1 2,1 'F17 ELE N BALLAST 34 68 0.02 3 RETROFIT 3' 3, LED TUBE / SELF BALLAST 30 180 0.09 (134) (134) 226 Barnegat High School Barnegat High School Boys Room 2,000 3 3,4 'F25 T8 ELE H BALLAST 55 22 0.06 1 RETROFIT 4' 2, LED TUBE / SELF BALLAST 21 8 0.02 14 14 227 Barnegat High School Boys Room 2,000 3 3,4 'F25 T8 ELE H BALLAST 55 22 0.06 1 RETROFIT 4' 2, LED TUBE / SELF BALLAST 21 8 0.02 14 14 228 Barnegat High School Boys Room 2,000 3 3,4 'F25 T8 ELE H BALLAST 55 440 0.22 4 RETROFIT 4' 2, LED TUBE / SELF BALLAST 32 189 0.09 306 306 228 Barnegat High School Boys Room 2,000 4 2,4 'F25 T8 ELE H BALLAST 55 440																	0.03
219 Barnegat High School Class A110																	0.03
Search S																	0.61
221 Barnegat High School Ladies Room 2,000 3 3 L4 F25 T8 ELE H BALLAST 55 440 0.22 4 RETROFIT 4'3 L LED TUBE / SELF BALLAST 21 168 0.08 272 272 223 Barnegat High School Ladies Room 2,000 2 2L3 F25 ELE N BALLAST 45 180 0.09 2 RETROFIT 4'2 L LED TUBE / SELF BALLAST 20 80 0.04 100 100 100 100 100 100 100 100 100 1							55					21				54	0.07
222 Barnegat High School Ladies Room 2,000 4 2L 4' F25 T8 ELE H BALLAST 55 440 0.22 4 RETROFIT 4'2L LED TUBE / SELF BALLAST 21 168 0.08 272					3	3L 4' F25 T8 ELE H BALLAST										306	0.15
223 Barnegat High School Ladies Room 2,000 2 2L 3' F25 ELE N BALLAST 45 180 0.09 2 RETROFIT 3' 2L LED TUBE / SELF BALLAST 20 80 0.04 100 100 100 224 Barnegat High School Ladies Room 2,000 1 COMPACT FLUORESCENT 23W HW 23 46 0.02 3 RETROFIT 3' 3L LED TUBE / SELF BALLAST 30 180 0.09 (134) (134) 225 Barnegat High School Faculty Bathroom 2,000 1 2L 2' F17 ELE N BALLAST 34 68 0.03 1 RETROFIT 2' 2L LED TUBE / SELF BALLAST 14 28 0.01 40 40 40 40 40 40 40 40 40 40 40 40 40																	0.14
224 Barnegat High School Ladies Room 2,000 1 COMPACT FLUORESCENT 23W HW 23 46 0.02 3 RETROFIT 3' 3L LED TUBE / SELF BALLAST 30 180 0.09 (134) (134) 225 Barnegat High School Faculty Bathroom 2,000 1 2L 2' F17 ELE N BALLAST 34 68 0.03 1 RETROFIT 2' 2L LED TUBE / SELF BALLAST 14 28 0.01 40 40 226 Barnegat High School Janitor 400 1 2L 4' F25 T8 ELE H BALLAST 55 22 0.06 1 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 8 0.02 14 14 2 227 Barnegat High School Boys Room 2,000 3 3L 4' F25 T8 ELE H BALLAST 83 495 0.25 3 RETROFIT 4'3L LED TUBE / SELF BALLAST 32 189 0.09 306 306 228 Barnegat High School Boys Room 2,000 4 2L 4' F25 T8 ELE H BALLAST 45 180 0.09 2 RETROFIT 3' 2L LED																	0.05
225 Barnegat High School Faculty Bathroom 2,000 1 2L 2' F17 ELE N BALLAST 34 68 0.03 1 RETROFIT 2' 2L LED TUBE / SELF BALLAST 14 28 0.01 40 40 226 Barnegat High School Janitor 400 1 2L 4' F25 T8 ELE H BALLAST 55 22 0.06 1 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 8 0.02 14 14 227 Barnegat High School Boys Room 2,000 3 3L 4' F25 T8 ELE H BALLAST 83 495 0.25 3 RETROFIT 4' 3L LED TUBE / SELF BALLAST 32 189 0.09 306 306 228 Barnegat High School Boys Room 2,000 4 2L 4' F25 T8 ELE H BALLAST 55 440 0.22 4 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 168 0.08 272 272 229 Barnegat High School Boys Room 2,000 2 2L 3' F25 ELE N BALLAST 45 180 0.09 2 RETROFIT 4' 2L LED TUBE / SELF BALLAST 20 80 0.04 100 100 230 <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>(0.07)</td></td<>																	(0.07)
226 Barnegat High School Janitor 400 1 2L 4" F25 T8 ELE H BALLAST 55 22 0.06 1 RETROFIT 4" 2L LED TUBE / SELF BALLAST 21 8 0.02 14 14 227 Barnegat High School Boys Room 2,000 3 3L 4" F25 T8 ELE H BALLAST 83 495 0.25 3 RETROFIT 4" 3L LED TUBE / SELF BALLAST 32 189 0.09 306 306 228 Barnegat High School Boys Room 2,000 4 2L 4" F25 T8 ELE H BALLAST 55 440 0.22 4 RETROFIT 4" 2L LED TUBE / SELF BALLAST 21 168 0.08 272 272 229 Barnegat High School Boys Room 2,000 2 2L 3" F25 ELE N BALLAST 45 180 0.09 2 RETROFIT 3" 2L LED TUBE / SELF BALLAST 20 80 0.04 100 100 230 Barnegat High School Boys Room 2,000 1 COMPACT FLUORESCENT 23W HW 23 46 0.02 1 RETROFIT HIGH HAT 12 WATT LED 6 INCH 12 24 0.01 22 22 231 Barne		0 0															0.02
227 Barnegat High School Boys Room 2,000 3 3L 4' F25 T8 ELE H BALLAST 83 495 0.25 3 RETROFIT 4' 3L LED TUBE / SELF BALLAST 32 189 0.09 306 306 228 Barnegat High School Boys Room 2,000 4 2L 4' F25 T8 ELE H BALLAST 55 440 0.22 4 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 168 0.08 272 272 229 Barnegat High School Boys Room 2,000 2 2L 3' F25 ELE N BALLAST 45 180 0.09 2 RETROFIT 3' 2L LED TUBE / SELF BALLAST 20 80 0.04 100 100 230 Barnegat High School Boys Room 2,000 1 COMPACT FLUORESCENT 23W HW 23 46 0.02 1 RETROFIT HIGH HAT 12 WATT LED 6 INCH 12 24 0.01 22 22 231 Barnegat High School S3 Storage 800 4 2L 4' F25 T8 ELE H BALLAST 55 176 0.22 4 RETROFIT 4' 3L LED TUBE / SELF BALLAST			·														0.03
228 Barnegat High School Boys Room 2,000 4 2L 4' F25 T8 ELE H BALLAST 55 440 0.22 4 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 168 0.08 272 272 229 Barnegat High School Boys Room 2,000 2 2L 3' F25 ELE N BALLAST 45 180 0.09 2 RETROFIT 3' 2L LED TUBE / SELF BALLAST 20 80 0.04 100 100 230 Barnegat High School Boys Room 2,000 1 COMPACT FLUORESCENT 23W HW 23 46 0.02 1 RETROFIT HIGH HAT 12 WATT LED 6 INCH 12 24 0.01 22 22 231 Barnegat High School S3 Storage 800 4 2L 4' F25 T8 ELE H BALLAST 55 176 0.22 4 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 67 0.08 109 109 232 Barnegat High School Class A101 Storage 800 2 3L 4' F25 T8 ELE H BALLAST 83 132 0.17 2 RETROFIT 4' 3L LED TUBE / SELF BALLAST 32 50 0.06 82 82 233																	0.15
229 Barnegat High School Boys Room 2,000 2 2L 3' F25 ELE N BALLAST 45 180 0.09 2 RETROFIT 3' 2L LED TUBE / SELF BALLAST 20 80 0.04 100 100 230 Barnegat High School Boys Room 2,000 1 COMPACT FLUORESCENT 23W HW 23 46 0.02 1 RETROFIT HIGH HAT 12 WATT LED 6 INCH 12 24 0.01 22 22 231 Barnegat High School S3 Storage 800 4 2L 4' F25 T8 ELE H BALLAST 55 176 0.22 4 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 67 0.08 109 109 232 Barnegat High School Class A101 Storage 800 2 3L 4' F25 T8 ELE H BALLAST 83 132 0.17 2 RETROFIT 4' 3L LED TUBE / SELF BALLAST 32 50 0.06 82 82 233 Barnegat High School Kiln Room 800 2 3L 4' F25 T8 ELE H BALLAST 83 132 0.17 2 RETROFIT 4'3L LED TUBE / SELF BALLAST 32 50 0.06 82 82																	0.14
230 Barnegat High School Boys Room 2,000 1 COMPACT FLUORESCENT 23W HW 23 46 0.02 1 RETROFIT HIGH HAT 12 WATT LED 6 INCH 12 24 0.01 22 22 231 Barnegat High School S3 Storage 800 4 2L 4' F25 T8 ELE H BALLAST 55 176 0.22 4 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 67 0.08 109 109 232 Barnegat High School Class A101 Storage 800 2 3L 4' F25 T8 ELE H BALLAST 83 132 0.17 2 RETROFIT 4' 3L LED TUBE / SELF BALLAST 32 50 0.06 82 82 233 Barnegat High School Kiln Room 800 2 3L 4' F25 T8 ELE H BALLAST 83 132 0.17 2 RETROFIT 4' 3L LED TUBE / SELF BALLAST 32 50 0.06 82 82																	0.05
231 Barnegat High School S3 Storage 800 4 2L 4' F25 T8 ELE H BALLAST 55 176 0.22 4 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 67 0.08 109 109 232 Barnegat High School Class A101 Storage 800 2 3L 4' F25 T8 ELE H BALLAST 83 132 0.17 2 RETROFIT 4' 3L LED TUBE / SELF BALLAST 32 50 0.06 82 82 233 Barnegat High School Kiln Room 800 2 3L 4' F25 T8 ELE H BALLAST 83 132 0.17 2 RETROFIT 4' 3L LED TUBE / SELF BALLAST 32 50 0.06 82 82																	0.01
232 Barnegat High School Class A101 Storage 800 2 3L 4' F25 T8 ELE H BALLAST 83 132 0.17 2 RETROFIT 4' 3L LED TUBE / SELF BALLAST 32 50 0.06 82 82 233 Barnegat High School Kiln Room 800 2 3L 4' F25 T8 ELE H BALLAST 83 132 0.17 2 RETROFIT 4' 3L LED TUBE / SELF BALLAST 32 50 0.06 82 82																	0.14
233 Barnegat High School Kiln Room 800 2 3L 4' F25 T8 ELE H BALLAST 83 132 0.17 2 RETROFIT 4' 3L LED TUBE / SELF BALLAST 32 50 0.06 82 82																	0.10
																	0.10
1 234 IDAILEUAL TIUTI SUTUUT 18 IN UZ STOTAGE 1 800 1 Z 131,4 FZS TX ELE H BALLAST 1 83 T 13Z T 0.17 T Z TRETROETI 4 3L TED TUBE / SELE BALLAST 3Z T 5D T 0.06 T 82 T 82 T		Barnegat High School	A102 Storage	800		3L 4' F25 T8 ELE H BALLAST	83	132	0.17		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	50	0.06	82	82	0.10
235 Barnegat High School A102 Display 800 2 1L 3' F25 ELE N BALLAST 23 37 0.05 2 RETROFIT 3' 1L LED TUBE / SELF BALLAST 10 16 0.02 21 21																	0.03

GreenTecl LIGHTING

	LOCATION:		EXISTING							PROPOSED	SAVINGS					
Line Ref	Building	Location	Existing Hrs. per Year	Existing QTY	Existing Lighting Description	Existing WATT / Fixture	Existing KWH Usage	Existing KW Usage	Proposed QTY	Proposed Lighting Description	Proposed WATT / Fixture	Proposed KWH Usage	Proposed Kw Usage	KWH Saved	Total KWH Saved	KW Saved
236	Barnegat High School	Data Closet	800	1	3L 4' F25 T8 ELE H BALLAST	83	66	0.08	1	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	25	0.03	41	41	0.05
237	Barnegat High School	Class C110	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
238	Barnegat High School	Class C109A	1,500	8	3L 4' F25 T8 ELE H BALLAST	83	990	0.66	8	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	378	0.25	612	612	0.41
239	Barnegat High School	Girls Room	2,000	6	2L 4' F25 T8 ELE H BALLAST	55	660	0.33	6	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	252	0.13	408	408	0.20
240	Barnegat High School	Girls Room	2,000	2	2L 3' F25 ELE N BALLAST	45	180	0.09	2	RETROFIT 3' 2L LED TUBE / SELF BALLAST	20	80	0.04	100	100	0.05
241	Barnegat High School	Girls Room	2,000	1	COMPACT FLUORESCENT 23W HW	23	46	0.02	1	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	24	0.01	22	22	0.01
242	Barnegat High School	Faculty Bathroom	2,000	1	2L 2' F17 ELE N BALLAST	34	68	0.03	1	RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	28	0.01	40	40	0.02
243	Barnegat High School	Janitor	400	1	2L 4' F25 T8 ELE H BALLAST	55	22	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	8	0.02	14	14	0.03
244	Barnegat High School	Boys Room	2,000	4	2L 4' F25 T8 ELE H BALLAST	55	440	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	168	0.08	272	272	0.14
245	Barnegat High School	Boys Room	2,000	2	2L 3' F25 ELE N BALLAST	45	180	0.09	2	RETROFIT 3' 2L LED TUBE / SELF BALLAST	20	80	0.04	100	100	0.05
246	Barnegat High School	Boys Room	2,000	3	2L 4' F25 T8 ELE H BALLAST	55	330	0.17	3	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	126	0.06	204	204	0.10
247	Barnegat High School	Boys Room	2,000	1	COMPACT FLUORESCENT 23W HW	23	46	0.02	1	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	24	0.01	22	22	0.01
248	Barnegat High School	Class C109	1,500	8	3L 4' F25 T8 ELE H BALLAST	83	990	0.66	8	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	378	0.25	612	612	0.41
249	Barnegat High School	Mechanical Room	1,500	2	2L 4' F25 T8 ELE H BALLAST	55	165	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	63	0.04	102	102	0.07
250	Barnegat High School	Hall Storage	800	4	2L 4' F25 T8 ELE H BALLAST	55	176	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	67	0.08	109	109	0.14
251	Barnegat High School	Class C108	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
252	Barnegat High School	Class C107	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
253	Barnegat High School	Class C105	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
254	Barnegat High School	Class C106	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
255	Barnegat High School	Class C103	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
256	Barnegat High School	Class C104	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
257	Barnegat High School	Prep Room	1,500	3	3L 4' F25 T8 ELE H BALLAST	83	371	0.25	3	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	142	0.09	230	230	0.15
258	Barnegat High School	Class C102	1,500	14	3L 4' F25 T8 ELE H BALLAST	83	1,733	1.16	14	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	662	0.44	1,071	1,071	0.71
259	Barnegat High School	Class C101	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
260	Barnegat High School	Hallways	3,860	57	COMPACT FLUORESCENT 23W HW	23	5,060	1.31	57	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	2,640	0.68	2,420	2,420	0.63
261	Barnegat High School	Hallways - Large Salad Bowls	3,860	2	EXISTING DECORATIVE FIXTURES	0			2	NO CHANGE	0				0	0.00
262	Barnegat High School	Football Building	3,000	25	3L 4' F25 T8 ELE H BALLAST	83	6,188	2.06	25	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	2,363	0.79	3,825	3,825	1.28
263	Barnegat High School	Football Building	3,000	6	4L 4' F25 T8 ELE H BALLAST	110	1,980	0.66	6	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	756	0.25	1,224	1,224	0.41
264	Barnegat High School	Bathroom	3,860	2	4L 4' F25 T8 ELE H BALLAST	110	849	0.22	2	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	324	0.08	525	525	0.14
265	Barnegat High School	Bathroom	3,860	2	4L 4' F25 T8 ELE H BALLAST	110	849	0.22	2	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	324	0.08	525	525	0.14
266	Barnegat High School	Office	2,500	2	4L 4' F25 T8 ELE H BALLAST	110	550	0.22	2	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	210	0.08	340	340	0.14
	Barnegat High School	Mop Closet	400	1	COMPACT FLUORESCENT 13W S/I	13	5	0.01		RELAMP 9 WATT LED A LAMP S/I	9	4	0.01	2	2	0.00
268	Barnegat High School	Hallway Emergency Ballast	3,860	0	0	0			50	EMERGENCY BALLAST LED	0				0	0.00
269	Barnegat High School	Exterior Lighting		0	0	0			0		0				0	0.00
270	Barnegat High School	Main Canopies	4,380	6	COMPACT FLUORESCENT 23W HW	23	604	0.14	6	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	315	0.07	289	289	0.00
271	Barnegat High School	Main Canopies	4,380	6	COMPACT FLUORESCENT 23W HW	23	604	0.14	6	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	315	0.07	289	289	0.00
	Barnegat High School	Main Canopies	4,380	8	COMPACT FLUORESCENT 23W HW	23	806	0.18	8	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	420	0.10	385	385	0.00
	Barnegat High School	Full Face Wall Packs	4,380	29	70 WATT INDUCTION WALLPACK	70	8,891	2.03	29	NEW LED WALL PACK 20 WATT	20	2,540	0.58	6,351	6,351	0.00
274	Barnegat High School	Wall Mount Floods	4,380	18	70 WATT INDUCTION FLOOD	70	5,519	1.26	18	NEW LED FLOOD 52 WATT	52	4,100	0.94	1,419	1,419	0.00
	Barnegat High School	PL Wall Packs	4,380	8	COMPACT FLUORESCENT 13W HW	13	456	0.10	8	NEW LED WALL PACK 20 WATT	20	701	0.16	(245)	(245)	0.00
276	Barnegat High School	Cutoff Wall Packs	4,380	23	COMPACT FLUORESCENT 23W HW (2)	46	4,634	1.06	23	NEW LED WALL PACK 20 WATT	20	2,015	0.46	2,619	2,619	0.00
	Barnegat High School	Shoe Box Pole Lights	4,380	79	200 WATT INDUCTION SHOEBOX	200	69,204	15.80	79	NEW LED SHOEBOX LOT 100 WATT ARM	100	34,602	7.90	34,602	34,602	0.00
278	Barnegat High School	(13) LED Wall Packs		0	0	0			0		0				0	0.00
	Barnegat High School	FOOTBALL BUILDING EXTER		0	0	0			0		0				0	0.00
	Barnegat High School	Wall Mount Floods	4,380	2	70 WATT MH FLOOD	92	806	0.18	2	NEW LED FLOOD 14 WATT	14	123	0.03	683	683	0.00
200			_	1										_	_	_
	Barnegat High School	Cutoff Wall Packs	4,380	1	70 WATT MH WALLPACK	92	403	0.09	1	NEW LED WALL PACK 20 WATT	20	88	0.02	315	315	0.00

CUSTOMER: Barnegat Township School Distriction Barnegat Township School Distriction:

LIGHTING

	LOCATION:			EXISTING						PROPOSED		SAVINGS				
Line Ref	Building	Location	Existing Hrs. per Year		Existing Lighting Description	Existing WATT / Fixture	Existing KWH Usage	Existing KW Usage	Proposed QTY	Proposed Lighting Description	Proposed WATT / Fixture	•	Proposed Kw Usage	KWH Saved	Total KWH Saved	KW Saved
283	Barnegat High School	#2 Courtyard Wall Packs	4,380	6	70 WATT INDUCTION WALLPACK	70	1,840	0.42	6	NEW LED WALL PACK 20 WATT	20	526	0.12	1,314	1,314	0.00
284	Barnegat High School	#2 Courtyard Wall Packs	4,380	2	COMPACT FLUORESCENT 23W HW (2)	46	403	0.09	2	NEW LED WALL PACK 20 WATT	20	175	0.04	228	228	0.00
285	Barnegat High School								1	3% Spares	0				0	0.00
286	Barnegat High School								17	High Reach Labor	0				0	0.00
	Total: Barnegat High School			2,055			384,484	159.78	2,162			163,021	64.71	221,463	221,463	83.85

GreenTech LIGHTING

	LOCATION:		EXISTING						PROPOSED		SAVINGS					
Line	D. 11.5	Longing	Existing Hrs. per	Existing		Existing WATT /	Existing KWH	Existing KW	Proposed		Proposed WATT /	Proposed	Proposed		Total KWH	
Ref	Building	Location	Year	QTY	Existing Lighting Description	Fixture	Usage	Usage	QTY	Proposed Lighting Description	Fixture	KWH Usage		KWH Saved		KW Saved
	Russell O Brackman Middle School	Main Entry	3,860	2	COMPACT FLUORESCENT 13W HW (3)	39	301	0.08		NEW LED CANOPY 21 WATT	21	162	0.04	139	139	0.04
2	Russell O Brackman Middle School	Main Entry	3,860	4	COMPACT FLUORESCENT 23W HW	23	355	0.09		RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	185	0.05	170	170	0.04
	Russell O Brackman Middle School	Lobby Area	3,860		COMPACT FLUORESCENT 23W HW	23	710	0.18		RETROFIT HIGH HAT 12 WATT LED 4 INCH	12	371	0.10	340	340	0.09
4	Russell O Brackman Middle School	Lobby Area	3,860	1	COMPACT FLUORESCENT 13W HW (3)	39	151	0.04		NEW LED CANOPY 21 WATT	21	81	0.02	69	69	0.02
5	Russell O Brackman Middle School	Lobby Area - Salad Bowl	3,860	1	EXISTING DECORATIVE FIXTURES	0	500	0.44		NO CHANGE	0	000	0.00	004	0	0.00
6	Russell O Brackman Middle School Russell O Brackman Middle School	Display Cases Main Office	3,860 2,500	6	1L 3' F25 ELE N BALLAST 3L 4' F25 T8 ELE H BALLAST	23 83	533 825	0.14 0.33	6 4	RETROFIT 3' 1L LED TUBE / SELF BALLAST RETROFIT 4' 3L LED TUBE / SELF BALLAST	10 32	232 315	0.06 0.13	301 510	301 510	0.08 0.20
8	Russell O Brackman Middle School	Main Office	2,500	0	COMPACT FLUORESCENT 13W HW	13	260	0.33	8	RETROFIT 4 3C LED TOBE 7 SELF BALLAST	12	240	0.13	20	20	0.20
9	Russell O Brackman Middle School	Mail Room	2,500	o 3	3L 4' F25 T8 ELE H BALLAST	83	619	0.10	3	RETROFIT HIGH HAT 12 WATT LED 4 INCH	32	236	0.10	383	383	0.01
10	Russell O Brackman Middle School	Mail Room	2,500	1	3L 4' F25 T8 ELE H BALLAST	83	206	0.08		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	79	0.03	128	128	0.15
11	Russell O Brackman Middle School	Principals Office	2,500	3	3L 4' F25 T8 ELE H BALLAST	83	619	0.08		RETROFIT 4 3L LED TUBE / SELF BALLAST	32	236	0.03	383	383	0.05
12	Russell O Brackman Middle School	Hall/Pantry	2,500		3L 4' F25 T8 ELE H BALLAST	83	206	0.08		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	79	0.03	128	128	0.05
	Russell O Brackman Middle School	Hall/Pantry	2,500	4	COMPACT FLUORESCENT 23W HW	23	230	0.09		RETROFIT HIGH HAT 12 WATT LED 4 INCH	12	120	0.05	110	110	0.04
14	Russell O Brackman Middle School	Bathroom	3,860	1	2L 4' F25 T8 ELE H BALLAST	55	212	0.06		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	81	0.02	131	131	0.03
	Russell O Brackman Middle School	Asst. Principal	2,500		3L 4' F25 T8 ELE H BALLAST	83	825	0.33		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	315	0.13	510	510	0.20
16	Russell O Brackman Middle School	Asst. Principal	2,500	4	3L 4' F25 T8 ELE H BALLAST	83	825	0.33		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	315	0.13	510	510	0.20
	Russell O Brackman Middle School	Storage	800	2	2L 4' F25 T8 ELE H BALLAST	55	88	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
18	Russell O Brackman Middle School	File Room	2,500	2	3L 4' F25 T8 ELE H BALLAST	83	413	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	158	0.06	255	255	0.10
19	Russell O Brackman Middle School	Office	2,500		3L 4' F25 T8 ELE H BALLAST	83	413	0.17		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	158	0.06	255	255	0.10
20	Russell O Brackman Middle School	Conference Room	2,500	4	3L 4' F25 T8 ELE H BALLAST	83	825	0.33	4	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	315	0.13	510	510	0.20
21	Russell O Brackman Middle School	Stair #1	3,860	5	2L 4' F25 T8 ELE H BALLAST	55	1,062	0.28	5	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	405	0.11	656	656	0.17
22	Russell O Brackman Middle School	Stair #1 - New LED		0	0	0			0		0				0	0.00
23	Russell O Brackman Middle School	2ND FLOOR WEST		0	0	0			0		0				0	0.00
24	Russell O Brackman Middle School	Storage Room	800	2	2L 4' F25 T8 ELE H BALLAST	55	88	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
25	Russell O Brackman Middle School	Boys	3,860	4	2L 4' F25 T8 ELE H BALLAST	55	849	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	324	0.08	525	525	0.14
26	Russell O Brackman Middle School	Boys	3,860	1	COMPACT FLUORESCENT 23W HW	23	89	0.02	1	RETROFIT HIGH HAT 12 WATT LED 4 INCH	12	46	0.01	42	42	0.01
27	Russell O Brackman Middle School	Closet	400		2L 4' F25 T8 ELE H BALLAST	55	22	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	8	0.02	14	14	0.03
28	Russell O Brackman Middle School	Girls Room	3,860	4	2L 4' F25 T8 ELE H BALLAST	55	849	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	324	0.08	525	525	0.14
29	Russell O Brackman Middle School	Girls Room	3,860	1	COMPACT FLUORESCENT 23W HW	23	89	0.02	1	RETROFIT HIGH HAT 12 WATT LED 4 INCH	12	46	0.01	42	42	0.01
30	Russell O Brackman Middle School	Class W201	1,500		2L 4' F25 T8 ELE H BALLAST	55	1,485	0.99		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	567	0.38	918	918	0.61
31	Russell O Brackman Middle School	Prep Room	2,200		2L 4' F25 T8 ELE H BALLAST	55	1,089	0.50		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	416	0.19	673	673	0.31
32	Russell O Brackman Middle School	Storage	800	2	2L 4' F25 T8 ELE H BALLAST	55	88	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
33	Russell O Brackman Middle School	Class W203	1,500		2L 4' F25 T8 ELE H BALLAST	55	1,733	1.16	21	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	662	0.44	1,071	1,071	0.71
	Russell O Brackman Middle School	Class W200	1,500		2L 4' F25 T8 ELE H BALLAST 2L 4' F25 T8 ELE H BALLAST	55	495	0.33		RETROFIT 4' 2L LED TUBE / SELF BALLAST RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	189	0.13	306	306	0.20
	Russell O Brackman Middle School	Class W202	1,500			55 55	990	0.66			21	378	0.25	612	612	0.41
	Russell O Brackman Middle School Russell O Brackman Middle School	Class W204 Class W205	1,500 1,500		2L 4' F25 T8 ELE H BALLAST 2L 4' F25 T8 ELE H BALLAST	55 55	1,238 1,650	0.83 1.10		RETROFIT 4' 2L LED TUBE / SELF BALLAST RETROFIT 4' 2L LED TUBE / SELF BALLAST	21 21	473 630	0.32 0.42	765 1,020	765 1,020	0.51 0.68
	Russell O Brackman Middle School	Prep Room	1,500		2L 4 F25 T8 ELE H BALLAST		743	0.50		RETROFIT 4 2L LED TUBE / SELF BALLAST	21		0.42	1,020 459	459	
	Russell O Brackman Middle School	Storage	800		2L 4 F25 T8 ELE H BALLAST	55 55	743 88	0.50		RETROFIT 4 2L LED TUBE / SELF BALLAST	21	284 34	0.19	459 54	459 54	0.31 0.07
	Russell O Brackman Middle School	Class W207	1,500		2L 4 F25 T8 ELE H BALLAST	55	1,485	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	567	0.04	918	918	0.61
	Russell O Brackman Middle School	Class W207	1,500		2L 4 F25 T6 ELE H BALLAST	55 55	1,465	0.99	15	RETROFIT 4 2L LED TUBE / SELF BALLAST	21	473	0.30	765	765	0.61
42	Russell O Brackman Middle School	Class W208	1,500		2L 4' F25 T8 ELE H BALLAST	55	1,238	0.83		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	473	0.32	765	765	0.51
43	Russell O Brackman Middle School	Stairs 2	3,860		2L 4' F25 T8 ELE H BALLAST	55	1,486	0.39		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	567	0.32	919	919	0.24
44	Russell O Brackman Middle School	Electrical Room	1,500		2L 4' F25 T8 ELE H BALLAST	55	165	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	63	0.04	102	102	0.07
	Russell O Brackman Middle School	Class N209	1,500		2L 4' F25 T8 ELE H BALLAST	55	495	0.33		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	189	0.13	306	306	0.20
	Russell O Brackman Middle School	Hall Storage	800		2L 4' F25 T8 ELE H BALLAST	55	88	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
	Russell O Brackman Middle School	Class N210	1,500		2L 4' F25 T8 ELE H BALLAST	55	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
48	Russell O Brackman Middle School	Girls Room	3,860		2L 4' F25 T8 ELE H BALLAST	55	637	0.17		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	243	0.06	394	394	0.10
	Russell O Brackman Middle School	Girls Room	3,860		2L 2' F17 ELE N BALLAST	34	262	0.07	2	RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	108	0.03	154	154	0.04
50	Russell O Brackman Middle School	Boys Room	3,860	3	2L 4' F25 T8 ELE H BALLAST	55	637	0.17	3	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	243	0.06	394	394	0.10
51	Russell O Brackman Middle School	Boys Room	3,860	2	2L 2' F17 ELE N BALLAST	34	262	0.07	2	RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	108	0.03	154	154	0.04
52	Russell O Brackman Middle School	Storage/Elec.	800	2	2L 4' F25 T8 ELE H BALLAST	55	88	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07

GreenTech LIGHTING

CUSTOMER: E
LOCATION:
City, State, Zip Code:

	LOCATION:		EXISTING							PROPOSED		SAVINGS				
Line Ref	Building	Location	Existing Hrs. per Year	Existing QTY	Existing Lighting Description	Existing WATT / Fixture	Existing KWH Usage	Existing KW Usage	Proposed QTY	Proposed Lighting Description	Proposed WATT / Fixture	Proposed KWH Usage	Proposed Kw Usage	KWH Saved	Total KWH Saved	KW Saved
53	Russell O Brackman Middle School	Class N212	2,200	12	2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
54	Russell O Brackman Middle School	Class N211	2,200	12	2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
55	Russell O Brackman Middle School	N314/N214	2,200		2L 4' F25 T8 ELE H BALLAST	55	1,936	0.88	16	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	739	0.34	1,197	1,197	0.54
56	Russell O Brackman Middle School	Class N213	2,200	12	2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
57	Russell O Brackman Middle School	Class N216	2,200	12	2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
58	Russell O Brackman Middle School	Class N215	2,200		2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
	Russell O Brackman Middle School	Class N218	2,200		2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
	Russell O Brackman Middle School	Class N217	2,200		2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
	Russell O Brackman Middle School	Faculty Room N220	2,500	6	2L 4' F25 T8 ELE H BALLAST	55	825	0.33	6	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	315	0.13	510 50	510	0.20
	Russell O Brackman Middle School	Faculty Room N220	2,500	1	2L 2' F17 ELE N BALLAST	34	85	0.03	1	RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	35	0.01	50	50	0.02
	Russell O Brackman Middle School	Class 219	2,200		2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
	Russell O Brackman Middle School	Custodian Closet	400	3	2L 4' F25 T8 ELE H BALLAST	55 55	66	0.17	3	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	25	0.06	41	41	0.10
	Russell O Brackman Middle School	Class N221	2,200	18	2L 4' F25 T8 ELE H BALLAST	55	2,178	0.99	18	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	832	0.38	1,346	1,346	0.61
	Russell O Brackman Middle School	N221 Storage	800	1	2L 4' F25 T8 ELE H BALLAST	55 55	44 2.420	0.06	1 20	RETROFIT 4' 2L LED TUBE / SELF BALLAST RETROFIT 4' 2L LED TUBE / SELF BALLAST	21 21	17 924	0.02	27 1,496	27 1,496	0.03
	Russell O Brackman Middle School Russell O Brackman Middle School	Class N222 N222 Prep	2,200 2,200		2L 4' F25 T8 ELE H BALLAST 2L 4' F25 T8 ELE H BALLAST	55 55	2,420 484	1.10 0.22	20 4	RETROFIT 4'2L LED TUBE / SELF BALLAST	21	924 185	0.42 0.08	299	1,496 299	0.68 0.14
		'			2L 4 F25 T8 ELE H BALLAST					RETROFIT 4' 2L LED TUBE / SELF BALLAST						
	Russell O Brackman Middle School Russell O Brackman Middle School	Electrical Room Hall Storage	1,500 800	3 2	2L 4 F25 18 ELE H BALLAST	55 55	248 88	0.17 0.11	3 2	RETROFIT 4 2L LED TUBE / SELF BALLAST	21 21	95 34	0.06 0.04	153 54	153 54	0.10 0.07
70	Russell O Brackman Middle School	Center Stairs	3,860	6	2L 4 F25 T8 ELE H BALLAST	55 55	1,274	0.11	6	RETROFIT 4 2L LED TUBE / SELF BALLAST	21	486	0.04	787	787	0.07
	Russell O Brackman Middle School	Center Stairs Center Stairs	3,860	1	3L 4' F25 T8 ELE H BALLAST	83	318	0.08	1	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	122	0.13	197	197	0.20
	Russell O Brackman Middle School	Class S223	2,200	18	2L 4' F25 T8 ELE H BALLAST	55	2,178	0.08	18	RETROFIT 4 3L LED TUBE / SELF BALLAST	21	832	0.03	1,346	1,346	0.05
	Russell O Brackman Middle School	S223 Kiln	800	10	3L 4' F25 T8 ELE H BALLAST	83	66	0.99	10	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	25	0.03	41	41	0.05
	Russell O Brackman Middle School	Class S225	2,200	12	2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
	Russell O Brackman Middle School	Class S224	2,200	20	2L 4 F25 T8 ELE H BALLAST	55 55	2,420	1.10	20	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	924	0.23	1,496	1,496	0.41
	Russell O Brackman Middle School	S224 Prep	2,200		2L 4' F25 T8 ELE H BALLAST	55	484	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	185	0.08	299	299	0.14
	Russell O Brackman Middle School	Class S227	2,200		2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
	Russell O Brackman Middle School	Class S226	2,200		2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
	Russell O Brackman Middle School	Class S229	2,200		2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
	Russell O Brackman Middle School	Class S228	2,200	12	2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
	Russell O Brackman Middle School	Class S231A	2,200		2L 4' F25 T8 ELE H BALLAST	55	605	0.28	5	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	231	0.11	374	374	0.17
83	Russell O Brackman Middle School	HALLS - SOME 3RD LAMP	3,860	3	3L 4' F25 T8 ELE H BALLAST	83	955	0.25	3	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	365	0.09	591	591	0.15
84	Russell O Brackman Middle School	Class 231B	2,200	8	2L 4' F25 T8 ELE H BALLAST	55	968	0.44	8	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	370	0.17	598	598	0.27
85	Russell O Brackman Middle School	Class S230	2,200	12	2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
86	Russell O Brackman Middle School	Class S233	2,200	12	2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
87	Russell O Brackman Middle School	Class S232	2,200	12	2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
88	Russell O Brackman Middle School	Electrical Room	1,500	2	2L 4' F25 T8 ELE H BALLAST	55	165	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	63	0.04	102	102	0.07
89	Russell O Brackman Middle School	Boys Room	3,860	3	2L 4' F25 T8 ELE H BALLAST	55	637	0.17	3	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	243	0.06	394	394	0.10
	Russell O Brackman Middle School	Boys Room	3,860		2L 2' F17 ELE N BALLAST	34	262	0.07		RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	108	0.03	154	154	0.04
	Russell O Brackman Middle School	Girls Room	3,860	_	2L 4' F25 T8 ELE H BALLAST	55	637	0.17	3	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	243	0.06	394	394	0.10
	Russell O Brackman Middle School	Girls Room	3,860		2L 2' F17 ELE N BALLAST	34	262	0.07	2	RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	108	0.03	154	154	0.04
	Russell O Brackman Middle School	Class S234	2,200		2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
	Russell O Brackman Middle School	Hall Storage	800		2L 4' F25 T8 ELE H BALLAST	55	88	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
	Russell O Brackman Middle School	Class S235	2,200		2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
	Russell O Brackman Middle School	Hallways	3,860		2L 4' F25 T8 ELE H BALLAST	55	10,190	2.64	48	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	3,891	1.01	6,300	6,300	1.63
	Russell O Brackman Middle School	Hallways	3,860		3L 4' F25 T8 ELE H BALLAST	83	5,095	1.32		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	1,945	0.50	3,150	3,150	0.82
	Russell O Brackman Middle School	1ST FLOOR		0	0	0	0		0		0				0	0.00
	Russell O Brackman Middle School	Main Hallways	3,860		3L 4' F25 T8 ELE H BALLAST	83	2,548	0.66	8	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	973	0.25	1,575	1,575	0.41
	Russell O Brackman Middle School	Main Hallways	3,860		2L 4' F25 T8 ELE H BALLAST	55	10,403	2.70	49	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	3,972	1.03	6,431	6,431	1.67
	Russell O Brackman Middle School	Main Hallways	3,860		3L 4' F25 T8 ELE H BALLAST	83	5,095	1.32		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	1,945	0.50	3,150	3,150	0.82
	Russell O Brackman Middle School	Library	2,500		2L 4' F25 T8 ELE H BALLAST	55	7,013	2.81	51	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	2,678	1.07	4,335	4,335	1.73
	Russell O Brackman Middle School	Library	2,500		2L 2' F17 ELE N BALLAST	34	425	0.17	5	RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	175	0.07	250	250	0.10
	Russell O Brackman Middle School	Displays	2,500		2L 4' F25 T8 ELE H BALLAST	55	275	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	105	0.04	170	170	0.07
105	Russell O Brackman Middle School	Library Work Room	2,500	6	2L 4' F25 T8 ELE H BALLAST	55	825	0.33	6	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	315	0.13	510	510	0.20

GreenTech LIGHTING

LOCATION: City, State, Zip Code:

	LOCATION:				EXISTING					PROPOSED				SAVINGS		
Line	5		Existing Hrs. per	Existing		Existing WATT /	Existing KWH	Existing KW	Proposed		Proposed WATT /	Proposed	Proposed		Total KWH	
Ref	Building	Location	Year	QTY	Existing Lighting Description	Fixture	Usage	Usage	QTY	Proposed Lighting Description	Fixture	KWH Usage	Kw Usage	KWH Saved	Saved	KW Saved
	Russell O Brackman Middle School	Office	2,500	3	2L 4' F25 T8 ELE H BALLAST	55	413	0.17	3	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	158	0.06	255	255	0.10
_	Russell O Brackman Middle School	Elevator Room	1,500		2L 4' F25 T8 ELE H BALLAST	55	83	0.06		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	32	0.02	51	51	0.03
	Russell O Brackman Middle School	Room C127	1,500		2L 4' F25 T8 ELE H BALLAST	55	413	0.28		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	158	0.11	255	255	0.17
	Russell O Brackman Middle School	Guidance	2,500		2L 4' F25 T8 ELE H BALLAST	55	413	0.17		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	158	0.06	255	255	0.10
	Russell O Brackman Middle School	Services	2,500		2L 4' F25 T8 ELE H BALLAST	55	413	0.17		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	158	0.06	255	255	0.10
	Russell O Brackman Middle School	Office #1	2,500		2L 4' F25 T8 ELE H BALLAST	55	413	0.17		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	158	0.06	255	255	0.10
	Russell O Brackman Middle School	Office #2	2,500	1	2L 4' F25 T8 ELE H BALLAST	55 	413	0.17		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	158	0.06	255	255	0.10
113	Russell O Brackman Middle School	Office #3	2,500		2L 4' F25 T8 ELE H BALLAST	55 55	550	0.22		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	210	0.08	340	340	0.14
	Russell O Brackman Middle School	Nurse Suite Nurse Suite	2,500 2,500		2L 4' F25 T8 ELE H BALLAST 2L 2' F17 ELE N BALLAST	55 34	1,513 510	0.61 0.20		RETROFIT 4' 2L LED TUBE / SELF BALLAST RETROFIT 2' 2L LED TUBE / SELF BALLAST	21 14	578 210	0.23 0.08	935 300	935 300	0.37
	Russell O Brackman Middle School															0.12
116	Russell O Brackman Middle School Russell O Brackman Middle School	Class C123	2,200 3,860		4L 4' F25 T8 ELE H BALLAST 2L 4' F25 T8 ELE H BALLAST	110	3,872	1.76		RETROFIT 4' 4L LED TUBE / SELF BALLAST RETROFIT 4' 2L LED TUBE / SELF BALLAST	42 21	1,478	0.67 0.04	2,394 262	2,394	1.09 0.07
	Russell O Brackman Middle School	Elevator Ladies Room	3,860		2L 4 F25 T8 ELE H BALLAST 2L 4' F25 T8 ELE H BALLAST	55 55	425 637	0.11 0.17		RETROFIT 4 2L LED TUBE / SELF BALLAST	21	162 243	0.04	262 394	262 394	0.07
				4	2L 2' F17 ELE N BALLAST	34				RETROFIT 2' 2L LED TUBE / SELF BALLAST	14				77	
119 120	Russell O Brackman Middle School Russell O Brackman Middle School	Ladies Room Class E145	3,860 2,200	16	4L 4' F25 T8 ELE H BALLAST	110	131 3,872	0.03 1.76		RETROFIT 2 2L LED TUBE / SELF BALLAST	42	54 1,478	0.01 0.67	77 2,394	2,394	0.02 1.09
	Russell O Brackman Middle School	Boys Room	3,860		2L 4' F25 T8 ELE H BALLAST	55	849	0.22		RETROFIT 4 4L LED TUBE / SELF BALLAST	21	324	0.07	2,39 4 525	2,394 525	0.14
	Russell O Brackman Middle School	Class E146	1,500	1	2L 4' F25 T8 ELE H BALLAST	55	1,320	0.88		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	504	0.34	816	816	0.54
	Russell O Brackman Middle School	E146 Storage	800		2L 4' F25 T8 ELE H BALLAST	55	88	0.00		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
	Russell O Brackman Middle School	E146 Office	2,500		4L 4' F25 T8 ELE H BALLAST	110	275	0.11		RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	105	0.04	170	170	0.07
	Russell O Brackman Middle School	E146 Office	2,500	1	2L 4' F25 T8 ELE H BALLAST	55	138	0.06		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	53	0.02	85	85	0.03
	Russell O Brackman Middle School	E146 Office	2,500	1	60 WATT INCANDESCENT	60	150	0.06		RELAMP 9 WATT LED A LAMP S/I	9	23	0.02	128	128	0.05
	Russell O Brackman Middle School	Display	3,860	1	2L 4' F25 T8 ELE H BALLAST	55	212	0.06		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	81	0.02	131	131	0.03
128	Russell O Brackman Middle School	Music E147	1,500		2L 4' F25 T8 ELE H BALLAST	55	1,155	0.77		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	441	0.29	714	714	0.48
	Russell O Brackman Middle School	E147 Storage	800		2L 4' F25 T8 ELE H BALLAST	55	176	0.22		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	67	0.23	109	109	0.14
	Russell O Brackman Middle School	Sound Booth	800		2L 4' F25 T8 ELE H BALLAST	55	88	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
	Russell O Brackman Middle School	Room E148	1,500	6	3L 4' F25 T8 ELE H BALLAST	83	743	0.50		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	284	0.19	459	459	0.31
	Russell O Brackman Middle School	(2) Bathrooms	3,860	2	2L 4' F25 T8 ELE H BALLAST	55	425	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	162	0.04	262	262	0.07
	Russell O Brackman Middle School	Class E148	2,200		3L 4' F25 T8 ELE H BALLAST	83	1,452	0.66		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	554	0.25	898	898	0.41
	Russell O Brackman Middle School	Class E149	2,200	1	3L 4' F25 T8 ELE H BALLAST	83	1,452	0.66		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	554	0.25	898	898	0.41
_	Russell O Brackman Middle School	Class E150	2,200		3L 4' F25 T8 ELE H BALLAST	83	1,452	0.66		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	554	0.25	898	898	0.41
136	Russell O Brackman Middle School	Class E151	2,200	2	3L 4' F25 T8 ELE H BALLAST	83	363	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	139	0.06	224	224	0.10
137	Russell O Brackman Middle School	Class E152	2,200	5	3L 4' F25 T8 ELE H BALLAST	83	908	0.41	5	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	347	0.16	561	561	0.26
138	Russell O Brackman Middle School	Facilities	2,500	22	2L 4' F25 T8 ELE H BALLAST	55	3,025	1.21	22	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	1,155	0.46	1,870	1,870	0.75
139	Russell O Brackman Middle School	Electrical Room	1,500	2	2L 4' F25 T8 ELE H BALLAST	55	165	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	63	0.04	102	102	0.07
140	Russell O Brackman Middle School	High Voltage	1,500	4	2L 4' F25 T8 ELE H BALLAST	55	330	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	126	0.08	204	204	0.14
	Russell O Brackman Middle School	Boiler Room	1,500		2L 4' F25 T8 ELE H BALLAST	55	495	0.33		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	189	0.13	306	306	0.20
	Russell O Brackman Middle School	Mens Room	3,860	1	3L 4' F25 T8 ELE H BALLAST	83	318	0.08	1	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	122	0.03	197	197	0.05
	Russell O Brackman Middle School	Mens Room	3,860		2L 4' F25 T8 ELE H BALLAST	55	425	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	162	0.04	262	262	0.07
	Russell O Brackman Middle School	Custodian Closet	400		2L 4' F25 T8 ELE H BALLAST	55	22	0.06		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	8	0.02	14	14	0.03
	Russell O Brackman Middle School	Main Gym Entries	3,860	6	2L 4' F25 T8 ELE H BALLAST	55	1,274	0.33	6	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	486	0.13	787	787	0.20
	Russell O Brackman Middle School	Storage - New LED		0	0	0			0		0				0	0.00
	Russell O Brackman Middle School	Main Gym	3,000		EXISTING 2x4 4L T5	234	16,848	5.62		RETROFIT 4' 4L T5 LED TUBE / SELF BALLA	100	7,200	2.40	9,648	9,648	3.22
	Russell O Brackman Middle School	Main Gym	3,000		EXISTING 1x4 2L T5	117	1,404	0.47		RETROFIT 4' 2L T5 LED TUBE / SELF BALLA	50	600	0.20	804	804	0.27
	Russell O Brackman Middle School	Boys Lockers	3,000		2L 4' F25 T8 ELE H BALLAST	55	2,310	0.77		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	882	0.29	1,428	1,428	0.48
	Russell O Brackman Middle School	Closet	400		2L 4' F25 T8 ELE H BALLAST	55	22	0.06		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	8	0.02	14	14	0.03
	Russell O Brackman Middle School	Showers	3,000		2L 4' F25 T8 ELE H BALLAST	55	495	0.17		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	189	0.06	306	306	0.10
	Russell O Brackman Middle School	Office	2,500		2L 4' F25 T8 ELE H BALLAST	55	413	0.17		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	158	0.06	255	255	0.10
	Russell O Brackman Middle School	Office	2,500		60 WATT INCANDESCENT	60 55	300	0.12		RELAMP 9 WATT LED A LAMP S/I	9	45	0.02	255	255	0.10
	Russell O Brackman Middle School	Girls Lockers	3,000	1	2L 4' F25 T8 ELE H BALLAST	55 	2,310	0.77		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	882	0.29	1,428	1,428	0.48
	Russell O Brackman Middle School	Closet	400		2L 4' F25 T8 ELE H BALLAST	55 55	22	0.06		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	8	0.02	14	14	0.03
	Russell O Brackman Middle School Russell O Brackman Middle School	Shower Office	3,000 2,500		2L 4' F25 T8 ELE H BALLAST 2L 4' F25 T8 ELE H BALLAST	55 55	660 413	0.22		RETROFIT 4' 2L LED TUBE / SELF BALLAST RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	252 158	0.08	408 255	408 255	0.14
						55		0.17			21		0.06		255	0.10
158	Russell O Brackman Middle School	Office	2,500	2	60 WATT INCANDESCENT	60	300	0.12	2	RELAMP 9 WATT LED A LAMP S/I	9	45	0.02	255	255	0.10

GreenTecl LIGHTING

	LOCATION:		EXISTING							PROPOSED		SAVINGS				
Line	D. W.F.	Location	Existing Hrs. per	Existing		Existing WATT /	Existing KWH	Existing KW	Proposed		Proposed WATT /	Proposed	Proposed		Total KWH	
Ref	Building	Location	Year	QTY	Existing Lighting Description	Fixture	Usage	Usage	QTY	Proposed Lighting Description	Fixture			KWH Saved	Saved	KW Saved
	Russell O Brackman Middle School	Storage Room	800		2L 4' F25 T8 ELE H BALLAST	55	308	0.39		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	118	0.15	190	190	0.24
	Russell O Brackman Middle School	Loft	800	6	2L 4' F25 T8 ELE H BALLAST	55 	264	0.33		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	101	0.13	163	163	0.20
	Russell O Brackman Middle School Russell O Brackman Middle School	Band G154 Girls Room	1,500 3,860		2L 4' F25 T8 ELE H BALLAST 2L 4' F25 T8 ELE H BALLAST	55 55	2,970 425	1.98 0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST RETROFIT 4' 2L LED TUBE / SELF BALLAST	21 21	1,134 162	0.76 0.04	1,836 262	1,836 262	1.22 0.07
	Russell O Brackman Middle School	Girls Room	3,860		3L 4' F25 T8 ELE H BALLAST	83	318	0.11		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	122	0.04	197	197	0.07
	Russell O Brackman Middle School	Weight Room	3,000		2L 4' F25 T8 ELE H BALLAST	55	3,960	1.32		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	1,512	0.50	2,448	2,448	0.82
	Russell O Brackman Middle School	Weight Room	3,000		2L 2' F17 ELE N BALLAST	34	204	0.07		RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	84	0.03	120	120	0.04
166	Russell O Brackman Middle School	Side Room	800	2	2L 4' F25 T8 ELE H BALLAST	55	88	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
167	Russell O Brackman Middle School	Display	3,860	1	2L 4' F25 T8 ELE H BALLAST	55	212	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	81	0.02	131	131	0.03
168	Russell O Brackman Middle School	Kitchen	2,000		2L 4' F25 T8 ELE H BALLAST	55	2,420	1.21		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	924	0.46	1,496	1,496	0.75
	Russell O Brackman Middle School	Kitchen	2,000		2L 4' F25 T8 ELE H BALLAST	55	440	0.22		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	168	0.08	272	272	0.14
	Russell O Brackman Middle School	Stove Hoods	2,000		60 WATT INCANDESCENT	60	480	0.24		RELAMP 9 WATT LED A LAMP S/I	9	72	0.04	408	408	0.20
	Russell O Brackman Middle School	Office	2,500		2L 4' F25 T8 ELE H BALLAST	55 55	275	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	105	0.04	170	170	0.07
	Russell O Brackman Middle School	Dry Storage	800		2L 4' F25 T8 ELE H BALLAST	55	132	0.17		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	50	0.06	82	82	0.10
	Russell O Brackman Middle School	Coolers	800	4	60 WATT INCANDESCENT 2L 4' F25 T8 ELE H BALLAST	60 55	192 212	0.24 0.06		RELAMP 9 WATT LED A LAMP S/I RETROFIT 4' 2L LED TUBE / SELF BALLAST	9 21	29 81	0.04 0.02	163	163	0.20
	Russell O Brackman Middle School Russell O Brackman Middle School	Bathroom Cafeteria	3,860 2,500	50	2L 4' F25 T8 ELE H BALLAST 2L 4' F25 T8 ELE H BALLAST	55	6,875	2.75		RETROFIT 4 2L LED TUBE / SELF BALLAST	21	2,625	1.05	131 4,250	131 4,250	0.03 1.70
	Russell O Brackman Middle School	Gvm #2 - New LED	2,000	0	0	0	0,070	2.70	0	RETROTT 4 ZE EED TODE / CEET BREEKOT	0	2,020	1.00	4,200	0	0.00
	Russell O Brackman Middle School	Closet	400		2L 4' F25 T8 ELE H BALLAST	55	22	0.06	_	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	8	0.02	14	14	0.03
	Russell O Brackman Middle School	Gym Storage	800		2L 4' F25 T8 ELE H BALLAST	55	132	0.17		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	50	0.06	82	82	0.10
	Russell O Brackman Middle School	Mechanical Room	1,500		2L 4' F25 T8 ELE H BALLAST	55	495	0.33		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	189	0.13	306	306	0.20
	Russell O Brackman Middle School	M132	2,200		2L 4' F25 T8 ELE H BALLAST	55	484	0.22		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	185	0.08	299	299	0.14
181	Russell O Brackman Middle School	M131	2,200	4	2L 4' F25 T8 ELE H BALLAST	55	484	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	185	0.08	299	299	0.14
182	Russell O Brackman Middle School	Boys Room	3,860	3	2L 4' F25 T8 ELE H BALLAST	55	637	0.17	3	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	243	0.06	394	394	0.10
183	Russell O Brackman Middle School	Boys Room	3,860		2L 2' F17 ELE N BALLAST	34	131	0.03		RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	54	0.01	77	77	0.02
184	Russell O Brackman Middle School	Room 130/129	2,200	8	2L 4' F25 T8 ELE H BALLAST	55	968	0.44	8	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	370	0.17	598	598	0.27
	Russell O Brackman Middle School	Girls Room	3,860		2L 4' F25 T8 ELE H BALLAST	55	637	0.17		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	243	0.06	394	394	0.10
	Russell O Brackman Middle School	Girls Room	3,860		2L 2' F17 ELE N BALLAST	34	131	0.03		RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	54	0.01	77	77	0.02
	Russell O Brackman Middle School	Room M128	2,200		2L 4' F25 T8 ELE H BALLAST	55 	242	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	92	0.04	150	150	0.07
	Russell O Brackman Middle School Russell O Brackman Middle School	Closet Electrical Room	400 1,500		2L 4' F25 T8 ELE H BALLAST 2L 4' F25 T8 ELE H BALLAST	55 55	22 165	0.06 0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST RETROFIT 4' 2L LED TUBE / SELF BALLAST	21 21	8	0.02 0.04	14	14 102	0.03 0.07
	Russell O Brackman Middle School	Class S134	2,200		2L 4' F25 T8 ELE H BALLAST	55 55	165 1,452	0.11		RETROFIT 4 2L LED TUBE / SELF BALLAST	21	63 554	0.04	102 898	898	0.07
	Russell O Brackman Middle School	Class S135	2,200	12	2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
	Russell O Brackman Middle School	Class S136	2,200		2L 4' F25 T8 ELE H BALLAST	55 55	1,452	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
	Russell O Brackman Middle School	Class S137	2,200	I	2L 4' F25 T8 ELE H BALLAST	55	2,662	1.21		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	1,016	0.46	1,646	1,646	0.75
	Russell O Brackman Middle School	Class S138	2,200		2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
195	Russell O Brackman Middle School	Class S140	2,200	12	2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
196	Russell O Brackman Middle School	Mechanical Room	1,500	2	2L 4' F25 T8 ELE H BALLAST	55	165	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	63	0.04	102	102	0.07
197	Russell O Brackman Middle School	Faculty S142	2,500		2L 4' F25 T8 ELE H BALLAST	55	413	0.17		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	158	0.06	255	255	0.10
	Russell O Brackman Middle School	Faculty S142	2,500		2L 2' F17 ELE N BALLAST	34	255	0.10		RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	105	0.04	150	150	0.06
	Russell O Brackman Middle School	Stairs	3,860		3L 4' F25 T8 ELE H BALLAST	83	1,911	0.50		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	730	0.19	1,181	1,181	0.31
	Russell O Brackman Middle School	Stairs	3,860		3L 4' F25 T8 ELE H BALLAST	83	318	0.08		RETROFIT 4'3L LED TUBE / SELF BALLAST	32	122	0.03	197	197	0.05
	Russell O Brackman Middle School	Room S141	2,200		2L 4' F25 T8 ELE H BALLAST	55 55	726	0.33		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21 21	277	0.13	449	449	0.20
	Russell O Brackman Middle School	Room S143	2,200		2L 4' F25 T8 ELE H BALLAST	55 55	1,452	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST		554 554	0.25	898	898	0.41
	Russell O Brackman Middle School Russell O Brackman Middle School	Room S144 NORTH WING	2,200	12 0	2L 4' F25 T8 ELE H BALLAST	55 0	1,452	0.66	12 0	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21 0	554	0.25	898	898 0	0.41 0.00
	Russell O Brackman Middle School	Closet	400		2L 4' F25 T8 ELE H BALLAST	55	22	0.06	_	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	8	0.02	14	14	0.00
	Russell O Brackman Middle School	Electrical Room	1,500		2L 4' F25 T8 ELE H BALLAST	55	165	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	63	0.04	102	102	0.07
	Russell O Brackman Middle School	Class N121	2,200		2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
	Russell O Brackman Middle School	Class N122	2,200		2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
209	Russell O Brackman Middle School	Class N119	2,200	12	2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
	Russell O Brackman Middle School	Class N120	2,200		2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
211	Russell O Brackman Middle School	Class N117	2,200	12	2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41

GreenTecl LIGHTING

	LOCATION:				EXISTING					PROPOSED				SAVINGS		
Line Ref	Building	Location	Existing Hrs. per Year	Existing QTY	Existing Lighting Description	Existing WATT / Fixture	Existing KWH Usage	Existing KW Usage	Proposed QTY	Proposed Lighting Description	Proposed WATT / Fixture	Proposed KWH Usage	Proposed Kw Usage	KWH Saved	Total KWH Saved	KW Saved
212	Russell O Brackman Middle School	Class N118	2,200	12	2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
		Class N115	2,200		2L 4' F25 T8 ELE H BALLAST	55 55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
214		Electrical Room	1,500		2L 4' F25 T8 ELE H BALLAST	55	165	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	63	0.04	102	102	0.07
		Class N113	2,200		2L 4' F25 T8 ELE H BALLAST	55	484	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	185	0.08	299	299	0.14
		Class N114	2,200		2L 4' F25 T8 ELE H BALLAST	55	726	0.33	6	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	277	0.13	449	449	0.20
		Class N112	2,200		2L 4' F25 T8 ELE H BALLAST	55	1,452	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	554	0.25	898	898	0.41
218	Russell O Brackman Middle School	Stairs	3,860	6	3L 4' F25 T8 ELE H BALLAST	83	1,911	0.50	6	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	730	0.19	1,181	1,181	0.31
		Stairs	3,860	1	3L 4' F25 T8 ELE H BALLAST	83	318	0.08	1	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	122	0.03	197	197	0.05
220	Russell O Brackman Middle School	Boys Room	3,860	4	2L 4' F25 T8 ELE H BALLAST	55	849	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	324	0.08	525	525	0.14
221	Russell O Brackman Middle School	Boys Room	3,860	1	COMPACT FLUORESCENT 23W HW	23	89	0.02	1	RETROFIT HIGH HAT 12 WATT LED 4 INCH	12	46	0.01	42	42	0.01
222		Closet	400	1	2L 4' F25 T8 ELE H BALLAST	55	22	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	8	0.02	14	14	0.03
223	Russell O Brackman Middle School	Girls Room	3,860	4	2L 4' F25 T8 ELE H BALLAST	55	849	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	324	0.08	525	525	0.14
224	Russell O Brackman Middle School	Girls Room	3,860	1	COMPACT FLUORESCENT 23W HW	23	89	0.02	1	RETROFIT HIGH HAT 12 WATT LED 4 INCH	12	46	0.01	42	42	0.01
225	Russell O Brackman Middle School	Class W101	1,500	18	2L 4' F25 T8 ELE H BALLAST	55	1,485	0.99	18	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	567	0.38	918	918	0.61
226	Russell O Brackman Middle School	Prep Room	2,200	6	2L 4' F25 T8 ELE H BALLAST	55	726	0.33	6	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	277	0.13	449	449	0.20
227	Russell O Brackman Middle School	Storage	800	2	2L 4' F25 T8 ELE H BALLAST	55	88	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
228	Russell O Brackman Middle School	Class W103	1,500	21	2L 4' F25 T8 ELE H BALLAST	55	1,733	1.16	21	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	662	0.44	1,071	1,071	0.71
229	Russell O Brackman Middle School	Book Storage	800	4	2L 4' F25 T8 ELE H BALLAST	55	176	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	67	0.08	109	109	0.14
230	Russell O Brackman Middle School	Server Room	800	2	2L 4' F25 T8 ELE H BALLAST	55	88	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
231	Russell O Brackman Middle School	Class W102	1,500	15	2L 4' F25 T8 ELE H BALLAST	55	1,238	0.83	15	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	473	0.32	765	765	0.51
232	Russell O Brackman Middle School	Class W104	1,500	15	2L 4' F25 T8 ELE H BALLAST	55	1,238	0.83	15	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	473	0.32	765	765	0.51
233	Russell O Brackman Middle School	Class W105	1,500	21	2L 4' F25 T8 ELE H BALLAST	55	1,733	1.16	21	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	662	0.44	1,071	1,071	0.71
234	Russell O Brackman Middle School	Prep Room	2,200	6	2L 4' F25 T8 ELE H BALLAST	55	726	0.33	6	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	277	0.13	449	449	0.20
235	Russell O Brackman Middle School	Storage	800	2	2L 4' F25 T8 ELE H BALLAST	55	88	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
236	Russell O Brackman Middle School	Class W107	1,500	18	2L 4' F25 T8 ELE H BALLAST	55	1,485	0.99	18	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	567	0.38	918	918	0.61
237	Russell O Brackman Middle School	Class W106	1,500	15	2L 4' F25 T8 ELE H BALLAST	55	1,238	0.83	15	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	473	0.32	765	765	0.51
238	Russell O Brackman Middle School	Class W108	1,500	15	2L 4' F25 T8 ELE H BALLAST	55	1,238	0.83	15	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	473	0.32	765	765	0.51
239	Russell O Brackman Middle School	Class W109	1,500		2L 4' F25 T8 ELE H BALLAST	55	1,238	0.83	15	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	473	0.32	765	765	0.51
240	Russell O Brackman Middle School	Class W110	1,500		2L 4' F25 T8 ELE H BALLAST	55	1,238	0.83	15	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	473	0.32	765	765	0.51
241	Russell O Brackman Middle School	Electrical Room	1,500	2	2L 4' F25 T8 ELE H BALLAST	55	165	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	63	0.04	102	102	0.07
242	Russell O Brackman Middle School	Courtyard	4,380	2	250 WATT MH SHOEBOX	295	2,584	0.59	2	NEW LED SHOEBOX LOT 100 WATT ARM	100	876	0.20	1,708	1,708	0.00
243		Courtyard	4,380	2	70 WATT HPS WALLPACK	95	832	0.19	2	NEW LED WALL PACK 20 WATT	20	175	0.04	657	657	0.00
	Russell O Brackman Middle School	N111 Room	2,200	-	2L 4' F25 T8 ELE H BALLAST	55	726	0.33	6	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	277	0.13	449	449	0.20
	Russell O Brackman Middle School	Auditorium Electrical Room	1,500		2L 4' F25 T8 ELE H BALLAST	55	165	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	63	0.04	102	102	0.07
		Side Room	800		2L 4' F25 T8 ELE H BALLAST	55	88	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
		Possible Emergency Ballast	3,860	0	0	0			25	EMERGENCY BALLAST LED	0				0	0.00
		EXTERIOR		-	0	0			0		0				0	0.00
		Shoe Box Pole Lights	4,380		200 WATT INDUCTION SHOEBOX	200	23,652	5.40		NEW LED SHOEBOX LOT 100 WATT ARM	100	11,826	2.70	11,826	11,826	0.00
		Wall Mount Shoe Box Fixtures	4,380		200 WATT INDUCTION WALLMOUNT SHOEBOX	200	9,636	2.20	11	NEW LED SHOEBOX LOT 100 WATT ARM	100	4,818	1.10	4,818	4,818	0.00
		Front Canopy	4,380		COMPACT FLUORESCENT 23W HW	23	403	0.09		RETROFIT HIGH HAT 12 WATT LED 4 INCH	12	210	0.05	193	193	0.00
		Surf Mount Box Fixture	4,380		70 WATT MH WALLPACK	92	2,015	0.46	5	NEW LED CANOPY 21 WATT	21	460	0.11	1,555	1,555	0.00
		Half Dome Wall Packs	4,380		70 WATT HPS WALLPACK	95	4,577	1.05	11	NEW LED WALL PACK 20 WATT	20	964	0.22	3,614	3,614	0.00
254	Russell O Brackman Middle School	Full Face Wall Packs	4,380	1	70 WATT MH WALLPACK	92	403	0.09	1	NEW LED WALL PACK 20 WATT	20	88	0.02	315	315	0.00
	Total: Russell O Brackman Middle School			1,872			294,133	117.59	1,962			115,943	45.76	178,191	178,191	66.20

GreenTecl LIGHTING

2 Ro 3 Ro 4 Ro 5 Ro 6 Ro 7 Ro 8 Ro 9 Ro 11 Ro 11 Ro 12 Ro	Building obert L Horbelt School	Location Main Entry Main Lobby Main Lobby Class 500 Stage Stage Storage Boys Room Girls Room Hall Storage	Existing Hrs. per Year 3,860 3,860 3,860 1,500 2,500 800 2,000 2,000	16 14 12 12 2 4	Existing Lighting Description 2L 4' F25 T8 ELE H BALLAST COMPACT FLUORESCENT 23W HW (2) COMPACT FLUORESCENT 23W HW (2) 2L 4' F25 T8 ELE H BALLAST 4L 4' F25 T8 ELE H BALLAST	Existing WATT / Fixture 55 46 46 55	Existing KWH Usage 425 2,841 2,486	Existing KW Usage 0.11	Proposed QTY	Proposed Lighting Description	Proposed WATT / Fixture	Proposed KWH Usage	Proposed Kw Usage	KWH Saved	Total KWH Saved	
2 Ro 3 Ro 4 Ro 5 Ro 6 Ro 7 Ro 8 Ro 9 Ro 11 Ro 11 Ro 12 Ro	obert L Horbelt School	Main Lobby Main Lobby Class 500 Stage Stage Storage Boys Room Girls Room Hall Storage	3,860 3,860 1,500 2,500 800 2,000 2,000	16 14 12 12 2 4	COMPACT FLUORESCENT 23W HW (2) COMPACT FLUORESCENT 23W HW (2) 2L 4' F25 T8 ELE H BALLAST 4L 4' F25 T8 ELE H BALLAST	46 46 55	2,841	0.11								KW Saved
3 Ro 4 Ro 5 Ro 6 Ro 7 Ro 8 Ro 9 Ro 10 Ro 11 Ro 12 Ro 13 Ro	obert L Horbelt School	Main Lobby Class 500 Stage Stage Storage Boys Room Girls Room Hall Storage	3,860 1,500 2,500 800 2,000 2,000	14 12 12 2 4	COMPACT FLUORESCENT 23W HW (2) 2L 4' F25 T8 ELE H BALLAST 4L 4' F25 T8 ELE H BALLAST	46 55			2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	162	0.04	262	262	0.07
4 Ro 5 Ro 6 Ro 7 Ro 8 Ro 9 Ro 10 Ro 11 Ro 12 Ro 13 Ro	obert L Horbelt School	Class 500 Stage Stage Storage Boys Room Girls Room Hall Storage	1,500 2,500 800 2,000 2,000	12 12 2 4	2L 4' F25 T8 ELE H BALLAST 4L 4' F25 T8 ELE H BALLAST	55	2.486	0.74	16	RETROFIT HIGH HAT 12 WATT LED 8 INCH	12	741	0.19	2,100	2,100	0.54
5 Ro 6 Ro 7 Ro 8 Ro 9 Ro 10 Ro 11 Ro 12 Ro 13 Ro	obert L Horbelt School	Stage Stage Storage Boys Room Girls Room Hall Storage	2,500 800 2,000 2,000	12 2 4	4L 4' F25 T8 ELE H BALLAST		,	0.64	14	RETROFIT HIGH HAT 12 WATT LED 8 INCH	12	648	0.17	1,837	1,837	0.48
6 Ro 7 Ro 8 Ro 9 Ro 10 Ro 11 Ro 12 Ro 13 Ro	obert L Horbelt School	Stage Storage Boys Room Girls Room Hall Storage	800 2,000 2,000	2			990	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
7 Ro 8 Ro 9 Ro 10 Ro 11 Ro 12 Ro 13 Ro	obert L Horbelt School	Boys Room Girls Room Hall Storage	2,000 2,000	4		110	3,300	1.32	12	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	1,260	0.50	2,040	2,040	0.82
8 Ro 9 Ro 10 Ro 11 Ro 12 Ro 13 Ro	obert L Horbelt School obert L Horbelt School obert L Horbelt School obert L Horbelt School	Girls Room Hall Storage	2,000		2L 4' F25 T8 ELE H BALLAST	55	88	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
9 Ro 10 Ro 11 Ro 12 Ro 13 Ro	obert L Horbelt School obert L Horbelt School obert L Horbelt School	Hall Storage			2L 4' F25 T8 ELE H BALLAST	55	440	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	168	0.08	272	272	0.14
10 Ro 11 Ro 12 Ro 13 Ro	obert L Horbelt School obert L Horbelt School		000	4	2L 4' F25 T8 ELE H BALLAST	55	440	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	168	0.08	272	272	0.14
11 Ro 12 Ro 13 Ro	obert L Horbelt School	Main Cum	800	3	2L 4' F25 T8 ELE H BALLAST	55	132	0.17	3	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	50	0.06	82	82	0.10
12 Ro 13 Ro		Main Gym	3,000	24	EXISTING 2x4 3L T5	175	12,600	4.20	24	RETROFIT 4' 3L T5 LED TUBE / SELF BALLA:	75	5,400	1.80	7,200	7,200	2.40
13 Ro		Gym Office	2,500	2	3L 4' F25 T8 ELE H BALLAST	83	413	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	158	0.06	255	255	0.10
	obert L Horbelt School	Storage Room	800	3	2L 4' F25 T8 ELE H BALLAST	55	132	0.17	3	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	50	0.06	82	82	0.10
14 Po	obert L Horbelt School	Storage Room	800	1	2L 4' F25 T8 ELE H BALLAST	55	44	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	17	0.02	27	27	0.03
17 110	obert L Horbelt School	Music Room	2,200	3	3L 4' F25 T8 ELE H BALLAST	83	545	0.25	3	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	208	0.09	337	337	0.15
15 Ro	obert L Horbelt School	Music Room	2,200	6	2L 4' F25 T8 ELE H BALLAST	55	726	0.33	6	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	277	0.13	449	449	0.20
16 Ro	obert L Horbelt School	Music Office	2,500	1	3L 4' F25 T8 ELE H BALLAST	83	206	0.08	1	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	79	0.03	128	128	0.05
17 Ro	obert L Horbelt School	Gym Lobby	3,860	15	COMPACT FLUORESCENT 23W HW (2)	46	2,663	0.69	15	RETROFIT HIGH HAT 12 WATT LED 8 INCH	12	695	0.18	1,969	1,969	0.51
18 Ro	obert L Horbelt School	Gym Lobby	3,860	11	2L 4' F25 T8 ELE H BALLAST	55	2,335	0.61	11	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	892	0.23	1,444	1,444	0.37
19 Ro	obert L Horbelt School	Side Entry	3,860	2	2L 4' F25 T8 ELE H BALLAST	55	425	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	162	0.04	262	262	0.07
20 Ro	obert L Horbelt School	Cafeteria	2,500	7	2L 4' F25 T8 ELE H BALLAST	55	963	0.39	7	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	368	0.15	595	595	0.24
21 Ro	obert L Horbelt School	Cafeteria	2,500	36	4L 4' F25 T8 ELE H BALLAST	110	9,900	3.96	36	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	3,780	1.51	6,120	6,120	2.45
22 Ro	obert L Horbelt School	Serving	2,000	6	4L 4' F25 T8 ELE H BALLAST	110	1,320	0.66	6	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	504	0.25	816	816	0.41
23 Ro	obert L Horbelt School	Custodian Closet	400	1	2L 4' F25 T8 ELE H BALLAST	55	22	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	8	0.02	14	14	0.03
24 Ro	obert L Horbelt School	Kitchen Bathroom	3,860	1	2L 4' F25 T8 ELE H BALLAST	55	212	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	81	0.02	131	131	0.03
25 Ro	obert L Horbelt School	Kitchen Area	2,000	10	2L 4' F25 T8 ELE H BALLAST	55	1,100	0.55	10	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	420	0.21	680	680	0.34
26 Ro	obert L Horbelt School	Kitchen Area	2,000	3	3L 4' F25 T8 ELE H BALLAST	83	495	0.25	3	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	189	0.09	306	306	0.15
27 Ro	obert L Horbelt School	Kitchen Office	2,500	2	2L 4' F25 T8 ELE H BALLAST	55	275	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	105	0.04	170	170	0.07
	obert L Horbelt School	Custodian Office	2,500		2L 4' F25 T8 ELE H BALLAST	55	688	0.28		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	263	0.11	425	425	0.17
29 Ro	obert L Horbelt School	Mechanical Room	1,500	11	2L 4' F25 T8 ELE H BALLAST	55	908	0.61	11	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	347	0.23	561	561	0.37
	obert L Horbelt School	Coolers	800	4	60 WATT INCANDESCENT	60	192	0.24	4	RELAMP 9 WATT LED A LAMP S/I	9	29	0.04	163	163	0.20
	obert L Horbelt School	Dry Storage	800		2L 4' F25 T8 ELE H BALLAST	55	176	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	67	0.08	109	109	0.14
32 Ro	obert L Horbelt School	Stove Hood	2,000		2L 4' F25 T8 ELE H BALLAST	55	440	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	168	0.08	272	272	0.14
	obert L Horbelt School	Cafeteria Storage	800		2L 4' F25 T8 ELE H BALLAST	55	220	0.28	5	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	84	0.11	136	136	0.17
	obert L Horbelt School	Main Office	1,800		3L 4' F25 T8 ELE H BALLAST	83	1,634	0.91		RETROFIT 4' 3L LED TUBE / SELF BALLAST		624	0.35	1,010	1,010	0.56
	obert L Horbelt School	Bathroom	3,860		2L 4' F25 T8 ELE H BALLAST	55	212	0.06		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	81	0.02	131	131	0.03
	obert L Horbelt School	Conference Room	1,800		3L 4' F25 T8 ELE H BALLAST	83	297	0.17		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	113	0.06	184	184	0.10
	obert L Horbelt School	Copier Room	1,800		3L 4' F25 T8 ELE H BALLAST	83	297	0.17		RETROFIT 4'3L LED TUBE / SELF BALLAST	32	113	0.06	184	184	0.10
	obert L Horbelt School	Office #1	1,800		3L 4' F25 T8 ELE H BALLAST	83	297	0.17		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	113	0.06	184	184	0.10
	obert L Horbelt School	Office #2	1,800		3L 4' F25 T8 ELE H BALLAST	83	297	0.17		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	113	0.06	184	184	0.10
	obert L Horbelt School obert L Horbelt School	Storage	800		2L 4' F25 T8 ELE H BALLAST	55 55	44 702	0.06		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	17	0.02	27 400	27 400	0.03
		Nurse Suite	1,800		2L 4' F25 T8 ELE H BALLAST	55	792	0.44		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	302	0.17	490	490	0.27
	obert L Horbelt School	Nurse Suite	1,800		2L 2' F17 ELE N BALLAST	34	245	0.14	4	RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	101	0.06	144	144	0.08
	obert L Horbelt School obert L Horbelt School	Bathroom (2) Pathroom	3,860		2L 4' F25 T8 ELE H BALLAST	55 55	212	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	81	0.02	131	131	0.03
		(2) Bathroom	3,860		2L 4' F25 T8 ELE H BALLAST	55	425	0.11			21	162	0.04	262	262	0.07
	obert L Horbelt School obert L Horbelt School	Mechanical Room	1,500		2L 4' F25 T8 ELE H BALLAST	55 46	83 2.496	0.06		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	32 649	0.02	51 1 927	51 1 927	0.03
	obert L Horbeit School	Lobby Area Faculty Room	3,860 1,800	_	COMPACT FLUORESCENT 23W HW (2) 3L 4' F25 T8 ELE H BALLAST	46 83	2,486 891	0.64 0.50		RETROFIT HIGH HAT 12 WATT LED 6 INCH RETROFIT 4' 3L LED TUBE / SELF BALLAST	12 32	648 340	0.17 0.19	1,837 551	1,837 551	0.48 0.31
		·						1								
	obert L Horbelt School obert L Horbelt School	Faculty Room Elevator	1,800 3,860		COMPACT FLUORESCENT 23W HW (2) 2L 4' F25 T8 ELE H BALLAST	46 55	414 425	0.23 0.11		RETROFIT HIGH HAT 12 WATT LED 6 INCH RETROFIT 4' 2L LED TUBE / SELF BALLAST	12 21	108 162	0.06 0.04	306 262	306 262	0.17 0.07
	obert L Horbeit School	Class 500A	1,500		3L 4' F25 T8 ELE H BALLAST	83	425 619	0.11		RETROFIT 4 2L LED TUBE / SELF BALLAST	32	236	0.04	383	383	0.07
		Electrical Closet			2L 4' F25 T8 ELE H BALLAST		248	0.41		RETROFIT 4' 2L LED TUBE / SELF BALLAST						
	obert L Horbelt School obert L Horbelt School	Hallway	1,500 3,860		2L 4' F25 18 ELE H BALLAST 2L 4' F25 T8 ELE H BALLAST	55 55	248 849	0.17		RETROFIT 4 2L LED TUBE / SELF BALLAST	21 21	95 324	0.06 0.08	153 525	153 525	0.10 0.14
	obert L Horbelt School	Hallway	3,860		COMPACT FLUORESCENT 23W HW (2)	46	178	0.22		RETROFIT 4 2L LED TOBE / SELF BALLAST	12	46	0.06	131	131	0.14

CUSTOMER: LOCATION: Barnegat Township School Dist

City, State, Zip Code:

GreenTecl LIGHTING

Boulding		LOCATION:				EXISTING					PROPOSED				SAVINGS		
Septiment Property		Building	Location	Hrs. per	_	Existing Lighting Description	WATT/	KWH	KW	-	Proposed Lighting Description	WATT /			KWH Saved	Total KWH Saved	KW Saved
20 Sooth Linger Stroom	54	Robert L Horbelt School	Girls Room	2,000	5	2L 4' F25 T8 ELE H BALLAST	55	550	0.28	5	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	210	0.11	340	340	0.17
Repart Horizon Stroom Class 60900 1,500 7 15 x 975 TR F = MALL ART 55 1,777 S				2,000			_		0.28	5		21	210	0.11		340	0.17
Separal Information	56	Robert L Horbelt School	Custodian Closet	400	1	2L 4' F25 T8 ELE H BALLAST	55	22	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	8	0.02	14	14	0.03
29 Robert Livens Strond	57	Robert L Horbelt School	Class 500B	1,500	7	3L 4' F25 T8 ELE H BALLAST	83	866	0.58	7	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	331	0.22	536	536	0.36
Description Code 907	58	Robert L Horbelt School	Hall Cove	3,860	6	2L 4' F25 T8 ELE H BALLAST	55	1,274	0.33	6	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	486	0.13		787	0.20
Select Index Served Class 502 1,500 13 30 6.7 ETS TELET INJURY 14 45 13 1,600 10 10 10 10 10 10 10	59	Robert L Horbelt School	Class 501	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
Separat Harmer School Class 552 1,50 7 COMPACT FLORESCENT 209 WIND 2 4 46 50 0.02 7 RETRIBOTH ONLY SWAT LED BINDS 12 100 0.09 357	60	Robert L Horbelt School	Class 501	1,500	3	COMPACT FLUORESCENT 23W HW (2)	46	207	0.14	3	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	54	0.04	153	153	0.10
State Report Lebroid School Section				1,500	13		83	1,609	1.07	13	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32			995	995	0.66
148 Several Heriter School Class 084 1,000 13 3.4 PPS 19 ELF HABLAST 50 1,000	62	Robert L Horbelt School	Class 502	1,500	7	COMPACT FLUORESCENT 23W HW (2)	46	483	0.32	7	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	126	0.08	357	357	0.24
Security Company Com	63	Robert L Horbelt School	Bathroom	2,000	1	2L 4' F25 T8 ELE H BALLAST	55	110	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	42	0.02	68	68	0.03
56 Robert Horbeit School Class 901 1,500 1 2,14°F25 TB ELH PALLAST 30 1,485 0.99 2 RETROFT 4 DLE DTUE / SEPE DALLAST 21 32 0.02 51 51 51 51 51 51 51 5	64	Robert L Horbelt School	Class 504	1,500	13	3L 4' F25 T8 ELE H BALLAST	83	1,609	1.07	13	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32			995	995	0.66
Formal Homes Sension Class 593 1,500 12 14 PS TREE EF HALLAST 48 1,485 0.09 12 RETROFIT 3.LED TUBE F.SELE BALLAST 32 567 0.38 91	65	Robert L Horbelt School	Class 504	1,500	7	COMPACT FLUORESCENT 23W HW (2)	46	483	0.32	7	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	126	0.08	357	357	0.24
68 Robert Homer Strotol Glass 903 1,500 2 COMPACT FLUDRESCENT 29W HW (2) 49 138 0,09 2 RETROPTH HIGH HAT TEWATT LED RINCH 12 96 0,02 102 102 102 102 102 103	66	Robert L Horbelt School	Class 504	1,500	1	2L 4' F25 T8 ELE H BALLAST	55	83	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	32	0.02	51	51	0.03
60										12							0.61
The property Notice Storol 505 Storage 500 2 2.4 FE75 TO ELEH MALLAST 55 68 0.11 2 RETROPIT # 2.1 ED TUBE? SELF PALLAST 21 34 0.04 54 54 72 12 12 12 13 0.04 54 54 72 12 12 12 12 12 12 12	68	Robert L Horbelt School	Class 503	1,500	2	COMPACT FLUORESCENT 23W HW (2)	46	138	0.09	2	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	36	0.02	102	102	0.07
77 Robert Horbes School Hollway 3,800 3 2,4 °F26 TSELE H BALLAST 55 657 0.17 3 RETROFIT 42 LED TUBE / SELE PABLAST 22 208 0.09 394 394 394 72 Robert Horbes School Holl Cove 3,800 8 7,4 °F26 TSELE H BALLAST 55 1,600 0.44 8 RETROFIT 42 LED TUBE / SELE PABLAST 22 208 0.09 394 39	69	Robert L Horbelt School			1					1						1.1	0.05
Top							_										0.07
Fig.	71	Robert L Horbelt School	Hallway	3,860	3	2L 4' F25 T8 ELE H BALLAST	55	637	0.17	3	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	243	0.06	394	394	0.10
To Robert Lefones School Class SOSA 1,500 2.4 S.4 F25T ELE HBALLAST 83 2,970 1,98 2.4 RETROFIT 4 SLEED TUBE/ SELF BALLAST 32 1,134 0.76 1,836 1,836 1,757 1,758	72	Robert L Horbelt School		2,200	Ū		_			3							0.15
178 Robert L. Horbert School Class 508 1,500 13 4 FST 58 ELE H BALLAST 83 1,000 1,07 13 RETROFT 43 LED TUBE/ SELE PALLAST 32 614 0,041 925 935 935 935 937 937 938							55										0.27
To Robert L Horbelt School	74	Robert L Horbelt School	Class 505A	1,500	24	3L 4' F25 T8 ELE H BALLAST	83	2,970	1.98	24	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	1,134			1,836	1.22
T7 Robert I Horbert School			Class 505A				46		0.09	2	RETROFIT HIGH HAT 12 WATT LED 6 INCH						0.07
The Robert L Hobels School					13												0.66
Procedure Proc	77	Robert L Horbelt School	Class 506	1,500	7	COMPACT FLUORESCENT 23W HW (2)	46	483	0.32	7	RETROFIT HIGH HAT 12 WATT LED 6 INCH		126	0.08	357	357	0.24
80 Robert L. Horbelt School Class 508 1,500 7 COMPACT FLUORESCENT ZWY HW (2) 48 483 0.32 7 RETROFIT HIGH HAT 12 WATT LED 6 INCH 12 126 0.08 357 357 357 357 358 Robert L. Horbelt School Class 507 1,500 12 4,725 TB ELE H BALLAST 83 1,485 0.99 12 RETROFIT & 2.LED TUBE / SELF BALLAST 21 32 0.02 51 51 51 53 53 53 53 53	78	Robert L Horbelt School			1					1	RETROFIT 4' 2L LED TUBE / SELF BALLAST			0.02			0.03
81 Robert L Horbeit School Class 508 1,500 1 2, 14 F278 TELE H BALLAST 55 83 0.06 1 RETROFIT 4 2, LED TUBE / SELF BALLAST 21 32 0.02 51 51 51 82 Robert L Horbeit School Class 507 1,500 3 COMPACT FLUORESCENT 23W HW (2) 46 207 0.14 3 RETROFIT 4 3, LED TUBE / SELF BALLAST 2 567 0.38 918 918 84 Robert L Horbeit School Hallway 3,860 8 COMPACT FLUORESCENT 23W HW (2) 46 1,420 0.37 8 RETROFIT 4 3, LED TUBE / SELF BALLAST 2 567 0.38 918 918 80 686 RObert L Horbeit School Hallway 3,860 8 COMPACT FLUORESCENT 23W HW (2) 46 1,420 0.37 8 RETROFIT 4 2, LED TUBE / SELF BALLAST 2 1 405 0.11 658 658 658 RObert L Horbeit School Hallway 3,860 8 COMPACT FLUORESCENT 23W HW (2) 46 1,420 0.37 8 RETROFIT 4 3, LED TUBE / SELF BALLAST 2 1 405 0.11 6,050 1.050 1																	0.66
Robert L. Horbert School	80	Robert L Horbelt School	Class 508	1,500	7		46	483	0.32	7					357	357	0.24
83 Robert L Horbeit School				,	1		_			1							0.03
Robert L Horbeit School Hailway 3,860 5 2,4 F25 T8 ELE H BALLAST 55 1,062 0.28 5 RETROFIT 4"2 L LED TUBE / SELF BALLAST 21 405 0.11 656 656 858 Robert L Horbeit School Hailway 3,860 8 COMPACT FLUORES CENT 23W HW (2) 46 1,420 0.37 8 RETROFIT 4"2 L LED TUBE / SELF BALLAST 32 567 0.38 918								,									0.61
85 Robert L Horbeit School Hallway 3,860 8 COMPACT FLUORESCENT 23W HW (2) 46 1,420 0.37 8 RETROFIT HIGH HAT 12 WAT T LED 6 INCH 12 371 0.10 1,05	83	Robert L Horbelt School	Class 507		3					-							0.10
86 Robert L Horbeit School Class 509/509B 1,500 12 31.4 °F25 T8 ELE H BALLAST 83 1,485 0.99 12 RETROFIT 4"3 LED TUBE / SELF BALLAST 32 567 0.38 918 918 878					-												0.17
87 Robert L Horbelt School Class 510/510B 1,500 12 3L 4 F25 T8 ELE H BALLAST 83 1,485 0,99 12 RETROFIT 4'3 L LED TUBE / SELF BALLAST 32 567 0.38 918 918 88 Robert L Horbelt School Class 512 1,500 13 2L 4 F25 T8 ELE H BALLAST 55 1,073 0.72 13 RETROFIT 4'2 LLED TUBE / SELF BALLAST 21 410 0.27 663 663 663 663 663 663 663 663 663 66					-												0.27
88 Robert L Horbelt School Class 512 1,500 13 2L 4" F25 T8 ELE H BALLAST 55 1,073 0,72 13 RETROFIT 4" 2L LED TUBE / SELF BALLAST 21 410 0,27 663 663 90 Robert L Horbelt School Class 511 2,200 15 2L 4" F25 T8 ELE H BALLAST 55 110 0,06 1 RETROFIT 4" 2L LED TUBE / SELF BALLAST 21 42 0,02 68 663 90 Robert L Horbelt School Class 511 2,200 15 2L 4" F25 T8 ELE H BALLAST 55 1,815 0,83 15 RETROFIT 4" 2L LED TUBE / SELF BALLAST 21 693 0,32 1,122 1,122 91 Robert L Horbelt School Hallway 3,860 4 2L 4" F25 T8 ELE H BALLAST 55 849 0,22 4 RETROFIT 4" 2L LED TUBE / SELF BALLAST 21 324 0,08 525 525 92 Robert L Horbelt School Class 513 2,200 15 2L 4" F25 T8 ELE H BALLAST 55 1,815 0,83 15 RETROFIT 4" 2L LED TUBE / SELF BALLAST 21 324 0,08 525 525 93 Robert L Horbelt School Class 514 1,500 13 2L 4" F25 T8 ELE H BALLAST 55 1,815 0,83 15 RETROFIT 4" 2L LED TUBE / SELF BALLAST 21 410 0,27 663 663 94 Robert L Horbelt School Class 514 1,500 1 2L 4" F25 T8 ELE H BALLAST 55 1,073 0,72 13 RETROFIT 4" 2L LED TUBE / SELF BALLAST 21 410 0,27 663 663 95 Robert L Horbelt School Class 514 1,500 1 2L 4" F25 T8 ELE H BALLAST 55 1,073 0,72 13 RETROFIT 4" 2L LED TUBE / SELF BALLAST 21 410 0,27 663 663 96 Robert L Horbelt School Class 514 1,500 1 2L 4" F25 T8 ELE H BALLAST 55 1,073 0,72 13 RETROFIT 4" 2L LED TUBE / SELF BALLAST 21 410 0,27 663 663 96 Robert L Horbelt School Hallway 3,860 3 2L 4" F25 T8 ELE H BALLAST 55 637 0,77 3 RETROFIT 4" 2L LED TUBE / SELF BALLAST 21 42 0,02 68 68 96 Robert L Horbelt School Hallway 3,860 3 2L 4" F25 T8 ELE H BALLAST 55 637 0,17 3 RETROFIT 4" 2L LED TUBE / SELF BALLAST 21 42 0,06 636 633 97 Robert L Horbelt School Electrical Room 1,500																	0.61
89 Robert L Horbeit School										12							0.61
Robert L Horbelt School										13							0.44
91 Robert L Horbeit School Hallway 3,860 4 2L 4°F25 T8 ELE H BALLAST 55 849 0.22 4 RETROFIT 4'2L LED TUBE / SELF BALLAST 21 324 0.08 525 525 92 Robert L Horbeit School Class 513 2,200 15 2L 4°F25 T8 ELE H BALLAST 55 1,815 0.83 15 RETROFIT 4'2L LED TUBE / SELF BALLAST 21 693 0.32 1,122 1,				- 1						1							0.03
Robert L Horbelt School Class 513 2,200 15 2L 4 F25 T8 ELE H BALLAST 55 1,815 0.83 15 RETROFIT 4'2L LED TUBE / SELF BALLAST 21 693 0.32 1,122 1,																,	0.51
93 Robert L Horbelt School Class 514 1,500 13 2L 4'F25 T8 ELE H BALLAST 55 1,073 0.72 13 RETROFIT 4'2L LED TUBE / SELF BALLAST 21 410 0.27 663 663 663 663 663 663 663 663 663 66																	0.14
94 Robert L Horbelt School Class 514 1,500 1 2L 2' BIAX LAMP 71 107 0.07 1 NEW 2X2 LED FLAT PANEL FIXTURE 40 WA 40 60 0.04 47 47 47 95 Robert L Horbelt School 514 Bathroom 2,000 1 2L 4' F25 T8 ELE H BALLAST 55 110 0.06 1 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 42 0.02 68 68 68 68 68 68 68 6																	0.51
95 Robert L Horbelt School 514 Bathroom 2,000 1 2L 4' F25 T8 ELE H BALLAST 55 110 0.06 1 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 42 0.02 68 68 68 68 68 Robert L Horbelt School Hallway 3,860 3 2L 4' F25 T8 ELE H BALLAST 55 637 0.17 3 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 243 0.06 394 394 394 697 Robert L Horbelt School Hallway 3,860 5 COMPACT FLUORESCENT 23W HW (2) 46 888 0.23 5 RETROFIT HIGH HAT 12 WATT LED 6 INCH 12 232 0.06 656 656 656 656 656 656 656 656 656 6										13							0.44
96 Robert L Horbeit School Hallway 3,860 3 2 L 4* F25 T8 ELE H BALLAST 55 637 0.17 3 RETROFIT 4* 2 L LED TUBE / SELF BALLAST 21 243 0.06 394 394 97 Robert L Horbeit School Hallway 3,860 5 COMPACT FLUORESCENT 23W HW (2) 46 888 0.23 5 RETROFIT HIGH HAT 12 WATT LED 6 INCH 12 232 0.06 656 656 98 Robert L Horbeit School Ladies Room 2,000 3 2 L 4* F25 T8 ELE H BALLAST 55 330 0.17 3 RETROFIT 4* 2 L LED TUBE / SELF BALLAST 21 126 0.06 204 204 99 Robert L Horbeit School Electrical Room 1,500 1 2 L 4* F25 T8 ELE H BALLAST 55 83 0.06 1 RETROFIT 4* 2 L LED TUBE / SELF BALLAST 21 32 0.02 51 51 100 Robert L Horbeit School Electrical Room 1,500 1 2 L 4* F25 T8 ELE H BALLAST 55 83 0.06 1 RETROFIT										1							0.03
97 Robert L Horbelt School Hallway 3,860 5 COMPACT FLUORESCENT 23W HW (2) 46 888 0.23 5 RETROFIT HIGH HAT 12 WATT LED 6 INCH 12 232 0.06 656 656 98 Robert L Horbelt School Ladies Room 2,000 3 2L 4' F25 T8 ELE H BALLAST 55 330 0.17 3 RETROFIT HIGH HAT 12 WATT LED 6 INCH 12 232 0.06 656 656 98 Robert L Horbelt School Ladies Room 1,500 1 2L 4' F25 T8 ELE H BALLAST 55 330 0.17 3 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 32 0.02 51 51 100 Robert L Horbelt School Electrical Room 1,500 1 2L 4' F25 T8 ELE H BALLAST 55 83 0.06 1 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 32 0.02 51 51 101 Robert L Horbelt School Boys Room 2,000 3 2L 4' F25 T8 ELE H BALLAST 55 330 0.17 3 RETROFIT 4' 2L LED T										1							0.03
98 Robert L Horbelt School Ladies Room 2,000 3 2L 4' F25 T8 ELE H BALLAST 55 330 0.17 3 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 126 0.06 204 204 99 Robert L Horbelt School Electrical Room 1,500 1 2L 4' F25 T8 ELE H BALLAST 55 83 0.06 1 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 32 0.02 51 51 100 Robert L Horbelt School Electrical Room 1,500 1 2L 4' F25 T8 ELE H BALLAST 55 83 0.06 1 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 32 0.02 51 51 101 Robert L Horbelt School Boys Room 2,000 3 2L 4' F25 T8 ELE H BALLAST 55 330 0.17 3 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 126 0.06 204 204 102 Robert L Horbelt School Class 515 2,200 15 2L 4' F25 T8 ELE H BALLAST 55 1,815 0.83 15 RETROFIT 4																	0.10
99 Robert L Horbelt School Electrical Room 1,500 1 2L 4' F25 T8 ELE H BALLAST 55 83 0.06 1 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 32 0.02 51 51 51 100 Robert L Horbelt School Electrical Room 1,500 1 2L 4' F25 T8 ELE H BALLAST 55 83 0.06 1 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 32 0.02 51 51 51 101 Robert L Horbelt School Boys Room 2,000 3 2L 4' F25 T8 ELE H BALLAST 55 330 0.17 3 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 32 0.02 51 51 101 Robert L Horbelt School Class 515 2,200 15 2L 4' F25 T8 ELE H BALLAST 55 1,815 0.83 15 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 693 0.32 1,122 1,122 103 Robert L Horbelt School Class 516 1,500 9 2L 4' F25 T8 ELE H BALLAST 55 743 0.50 9 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 648 0.17 1,050 1,050			-														0.17 0.10
100 Robert L Horbelt School Electrical Room 1,500 1 2 L 4' F25 T8 ELE H BALLAST 55 83 0.06 1 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 32 0.02 51 51 101 Robert L Horbelt School Boys Room 2,000 3 2L 4' F25 T8 ELE H BALLAST 55 330 0.17 3 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 126 0.06 204 204 102 Robert L Horbelt School Class 515 2,200 15 2L 4' F25 T8 ELE H BALLAST 55 1,815 0.83 15 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 693 0.32 1,122 1,122 103 Robert L Horbelt School Class 516 1,500 9 2L 4' F25 T8 ELE H BALLAST 55 743 0.50 9 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 648 0.19 459 104 Robert L Horbelt School Stairwell 3,860 8 2L 4' F25 T8 ELE H BALLAST 55 1,698 0.44 8 RETROFIT 4' 2L LED TUBE /										ى د							
101 Robert L Horbelt School Boys Room 2,000 3 2 L 4' F25 T8 ELE H BALLAST 55 330 0.17 3 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 126 0.06 204 204 102 Robert L Horbelt School Class 515 2,200 15 2L 4' F25 T8 ELE H BALLAST 55 1,815 0.83 15 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 693 0.32 1,122 1,122 103 Robert L Horbelt School Class 516 1,500 9 2L 4' F25 T8 ELE H BALLAST 55 743 0.50 9 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 693 0.32 1,122 1,122 104 Robert L Horbelt School Stairwell 3,860 8 2L 4' F25 T8 ELE H BALLAST 55 1,698 0.44 8 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 648 0.17 1,050 1,050										1							0.03
102 Robert L Horbelt School Class 515 2,200 15 2L 4' F25 T8 ELE H BALLAST 55 1,815 0.83 15 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 693 0.32 1,122 1,122 103 Robert L Horbelt School Class 516 1,500 9 2L 4' F25 T8 ELE H BALLAST 55 743 0.50 9 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 284 0.19 459 459 104 Robert L Horbelt School Stairwell 3,860 8 2L 4' F25 T8 ELE H BALLAST 55 1,698 0.44 8 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 648 0.17 1,050 1,050										ا و							0.03 0.10
103 Robert L Horbelt School Class 516 1,500 9 2L 4' F25 T8 ELE H BALLAST 55 743 0.50 9 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 284 0.19 459 459 104 Robert L Horbelt School Stairwell 3,860 8 2L 4' F25 T8 ELE H BALLAST 55 1,698 0.44 8 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 648 0.17 1,050 1,050			·														
104 Robert L Horbelt School Stairwell 3,860 8 2L 4' F25 T8 ELE H BALLAST 55 1,698 0.44 8 RETROFIT 4' 2L LED TUBE / SELF BALLAST 21 648 0.17 1,050 1,050																-	0.51
																	0.31 0.27
405 Deheat Herbelt Cahaal Chairmall 2000 0 0						A LA LO ELE U DALLAO I		। ,ତଞ୍ଚ	0.44				040	0.17	1,000		
105 Robert L Horbelt School Stairwell 3,860 0 0 0 8 EMERGENCY BALLAST LED 0 0 0 106 Robert L Horbelt School 2ND FLOOR 0 0 0 0 0 0				3,860		0					EWERGENCY BALLAST LED					-	0.00

GreenTech LIGHTING

LOCATION: City, State, Zip Code:

	LOCATION:				EXISTING					PROPOSED				SAVINGS		
			Existing			Existing	Existing	Existing			Proposed					
Line	Duilding	Location	Hrs. per	Existing	Eviatina Limbtina Deceriation	WATT /	KWH	KW	Proposed	Dranged Lighting Description	WATT /	Proposed	Proposed	IZMILI O d	Total KWH	IOM Correct
Ref	Building	Location	Year	QTY	Existing Lighting Description	Fixture	Usage	Usage	QTY	Proposed Lighting Description	Fixture	KWH Usage		KWH Saved	Saved	KW Saved
	Robert L Horbelt School	Class 616	1,500		2L 4' F25 T8 ELE H BALLAST	55 	743	0.50		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	284	0.19	459	459	0.31
108	Robert L Horbelt School Robert L Horbelt School	Class 617 Mens Room	1,500 2,000		2L 4' F25 T8 ELE H BALLAST 2L 4' F25 T8 ELE H BALLAST	55 55	1,238 330	0.83 0.17		RETROFIT 4' 2L LED TUBE / SELF BALLAST RETROFIT 4' 2L LED TUBE / SELF BALLAST	21 21	473 126	0.32 0.06	765 204	765 204	0.51 0.10
	Robert L Horbelt School	Hallway	3,860		2L 4 F25 TO ELE FI BALLAST 2L 4' F25 T8 ELE H BALLAST	55	5,095	1.32	3 24	RETROFIT 4 2L LED TUBE / SELF BALLAST	21	1,945	0.50	3,150	3,150	0.10
111	Robert L Horbelt School	Hallway	3,860	20	COMPACT FLUORESCENT 23W HW (2)	46	3,551	0.92		RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	926	0.24	2,625	2,625	0.68
	Robert L Horbelt School	Hall Storage	800		2L 4' F25 T8 ELE H BALLAST	55	88	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
	Robert L Horbelt School	Ladies Room	2,000		2L 4' F25 T8 ELE H BALLAST	55	330	0.17		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	126	0.06	204	204	0.10
114	Robert L Horbelt School	Class 614	1,500	15	2L 4' F25 T8 ELE H BALLAST	55	1,238	0.83	15	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	473	0.32	765	765	0.51
115	Robert L Horbelt School	Class 615	1,500		2L 4' F25 T8 ELE H BALLAST	55	1,238	0.83		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	473	0.32	765	765	0.51
116	Robert L Horbelt School	Class 612	1,500	15	2L 4' F25 T8 ELE H BALLAST	55	1,238	0.83	15	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	473	0.32	765	765	0.51
117	Robert L Horbelt School	Class 613	1,500	15	2L 4' F25 T8 ELE H BALLAST	55	1,238	0.83		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	473	0.32	765	765	0.51
118	Robert L Horbelt School	Stair #3	3,860	8	2L 4' F25 T8 ELE H BALLAST	55	1,698	0.44		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	648	0.17	1,050	1,050	0.27
	Robert L Horbelt School	Stair #3	3,860		COMPACT FLUORESCENT 23W HW (2)	46	355	0.09		RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	93	0.02	262	262	0.07
120 121	Robert L Horbelt School Robert L Horbelt School	Stair #2 Stair #2	3,860 3,860	7	2L 4' F25 T8 ELE H BALLAST COMPACT FLUORESCENT 23W HW (2)	55 46	1,486 355	0.39 0.09	7 2	RETROFIT 4' 2L LED TUBE / SELF BALLAST RETROFIT HIGH HAT 12 WATT LED 6 INCH	21 12	567 93	0.15 0.02	919 262	919 262	0.24 0.07
	Robert L Horbelt School	Class 611	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,485	0.09		RETROFIT HIGH HAT 12 WATT LED 6 INCH	32	93 567	0.02	918	918	0.07
123	Robert L Horbelt School	Class 611	1,500	3	COMPACT FLUORESCENT 23W HW (2)	46	207	0.14	3	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	54	0.04	153	153	0.10
	Robert L Horbelt School	Class 610	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.10
	Robert L Horbelt School	Class 610	1,500		COMPACT FLUORESCENT 23W HW (2)	46	207	0.14		RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	54	0.04	153	153	0.10
126	Robert L Horbelt School	Hall Cove	3,860	8	2L 4' F25 T8 ELE H BALLAST	55	1,698	0.44	8	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	648	0.17	1,050	1,050	0.27
127	Robert L Horbelt School	Class 608	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
128	Robert L Horbelt School	Class 608	1,500	3	COMPACT FLUORESCENT 23W HW (2)	46	207	0.14	3	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	54	0.04	153	153	0.10
129	Robert L Horbelt School	Class 609	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Robert L Horbelt School	Class 609	1,500		COMPACT FLUORESCENT 23W HW (2)	46	207	0.14		RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	54	0.04	153	153	0.10
	Robert L Horbelt School	Class 607	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
132	Robert L Horbelt School	Class 607	1,500	3	COMPACT FLUORESCENT 23W HW (2)	46	207	0.14		RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	54	0.04	153	153	0.10
133 134	Robert L Horbelt School Robert L Horbelt School	Class 606 Class 606	1,500 1,500	12	3L 4' F25 T8 ELE H BALLAST COMPACT FLUORESCENT 23W HW (2)	83 46	1,485 207	0.99 0.14	12 3	RETROFIT 4' 3L LED TUBE / SELF BALLAST RETROFIT HIGH HAT 12 WATT LED 6 INCH	32 12	567 54	0.38 0.04	918 153	918 153	0.61 0.10
	Robert L Horbelt School	Hall Cove	3,860	6	2L 4' F25 T8 ELE H BALLAST	55	1,274	0.14		RETROFIT HIGH HAT 12 WATT LED 6 INCH	21	486	0.04		787	0.10
135 136	Robert L Horbelt School	Class 604	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.33	12	RETROFIT 4 2L LED TUBE / SELF BALLAST	32	567	0.13	787 918	918	0.20
137	Robert L Horbelt School	Class 604	1,500	3	COMPACT FLUORESCENT 23W HW (2)	46	207	0.14		RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	54	0.04	153	153	0.10
138	Robert L Horbelt School	Class 605	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Robert L Horbelt School	Class 605	1,500	3	COMPACT FLUORESCENT 23W HW (2)	46	207	0.14	3	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	54	0.04	153	153	0.10
140	Robert L Horbelt School	Class 603	1,500	12	3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99	12	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
141	Robert L Horbelt School	Class 603	1,500	3	COMPACT FLUORESCENT 23W HW (2)	46	207	0.14	3	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	54	0.04	153	153	0.10
	Robert L Horbelt School	Class 602	1,500		3L 4' F25 T8 ELE H BALLAST	83	1,485	0.99		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	567	0.38	918	918	0.61
	Robert L Horbelt School	Class 602	1,500		COMPACT FLUORESCENT 23W HW (2)	46	207	0.14	3	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	54	0.04	153	153	0.10
	Robert L Horbelt School	Boys Room	2,000		2L 4' F25 T8 ELE H BALLAST	55 55	550	0.28		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	210	0.11	340	340	0.17
	Robert L Horbelt School Robert L Horbelt School	Ladies Room Class 601B/601	2,000 1,500		2L 4' F25 T8 ELE H BALLAST 3L 4' F25 T8 ELE H BALLAST	55 83	550 1,485	0.28 0.99		RETROFIT 4' 2L LED TUBE / SELF BALLAST RETROFIT 4' 3L LED TUBE / SELF BALLAST	21 32	210 567	0.11 0.38	340 918	340 918	0.17 0.61
	Robert L Horbelt School	Custodian Closet	400		2L 4' F25 T8 ELE H BALLAST		•	0.99		RETROFIT 4'3L LED TUBE / SELF BALLAST	21	8	0.38			
147 148	Robert L Horbelt School	Electrical Room	1,500		2L 4 F25 T8 ELE H BALLAST 2L 4' F25 T8 ELE H BALLAST	55 55	22 248	0.06		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	95	0.02	14 153	14 153	0.03 0.10
	Robert L Horbelt School	(2) Faculty Bathrooms	2,000		2L 4' F25 T8 ELE H BALLAST	55	220	0.17		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	84	0.04	136	136	0.10
	Robert L Horbelt School	Class 600A	2,200		3L 4' F25 T8 ELE H BALLAST	83	1,634	0.74		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	624	0.28	1,010	1,010	0.46
	Robert L Horbelt School	600A Storage	800		2L 4' F25 T8 ELE H BALLAST	55	88	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
152	Robert L Horbelt School	Class 600	1,500	9	3L 4' F25 T8 ELE H BALLAST	83	1,114	0.74	9	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	425	0.28	689	689	0.46
	Robert L Horbelt School	Class 600	1,500	1	COMPACT FLUORESCENT 23W HW (2)	46	69	0.05		RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	18	0.01	51	51	0.03
	Robert L Horbelt School	Mechanical Room	1,500		2L 4' F25 T8 ELE H BALLAST	55	660	0.44		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	252	0.17	408	408	0.27
	Robert L Horbelt School	Library	2,500		4L 4' F25 T8 ELE H BALLAST	110	7,700	3.08		RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	2,940	1.18	4,760	4,760	1.90
	Robert L Horbelt School	Library	2,500		2L 4' F25 T8 ELE H BALLAST	55	275	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	105	0.04	170	170	0.07
	Robert L Horbelt School Robert L Horbelt School	Library Work Room	2,500 1,800		3L 4' F25 T8 ELE H BALLAST 3L 4' F25 T8 ELE H BALLAST	83 83	413 801	0.17		RETROFIT 4' 3L LED TUBE / SELF BALLAST RETROFIT 4' 3L LED TUBE / SELF BALLAST	32 32	158 340	0.06	255 551	255 551	0.10
							891	0.50					0.19		551	0.31
159	Robert L Horbelt School	Storage Room	800	11	2L 4' F25 T8 ELE H BALLAST	55	484	0.61	11	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	185	0.23	299	299	0.37

CUSTOMER: Barnegat Township School Distriction
LOCATION: GreenTeck
LIGHTING

	LOCATION:				EXISTING					PROPOSED				SAVINGS		
Line Ref	Building	Location	Existing Hrs. per Year	Existing QTY	Existing Lighting Description	Existing WATT / Fixture	Existing KWH Usage	Existing KW Usage	Proposed QTY	Proposed Lighting Description	Proposed WATT / Fixture	Proposed KWH Usage	Proposed Kw Usage	KWH Saved	Total KWH Saved	KW Saved
160	Robert L Horbelt School	Storage Room	800	1	COMPACT FLUORESCENT 23W HW (2)	46	37	0.05	1	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	10	0.01	27	27	0.03
161	Robert L Horbelt School	Stair #1	3,860	7	2L 4' F25 T8 ELE H BALLAST	55	1,486	0.39	7	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	567	0.15	919	919	0.24
162	Robert L Horbelt School	Stair #1	3,860	2	COMPACT FLUORESCENT 23W HW (2)	46	355	0.09	2	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	93	0.02	262	262	0.07
163	Robert L Horbelt School	Possible Emergency Ballast		0	0	0			25	EMERGENCY BALLAST LED	0				0	0.00
164	Robert L Horbelt School	EXTERIOR		0	0	0			0		0				0	0.00
165	Robert L Horbelt School	Main Canopy	4,380	4	COMPACT FLUORESCENT 23W HW (2)	46	806	0.18	4	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	210	0.05	596	596	0.00
166	Robert L Horbelt School	Main Canopy - Induction	4,380	5	50 WATT INDUCTION CANOPY FIXTURE	50	1,095	0.25	5	NEW LED CANOPY 21 WATT	21	460	0.11	635	635	0.00
167	Robert L Horbelt School	Full Face Wall Packs - New LE		0	0	0			0		0				0	0.00
168	Robert L Horbelt School	Bell Top Pole Lights	4,380	17	100 WATT MH BELL TOP POLE LIGHT	130	9,680	2.21	17	RELAMP CORN STYLE 30W LED E26	20	1,489	0.34	8,191	8,191	0.00
169	Robert L Horbelt School	Bell Top Wall Mount Fixtures	4,380	7	70 WATT MH BELL TOP WALLPACK	92	2,821	0.64	7	NEW LED WALL PACK 20 WATT	20	613	0.14	2,208	2,208	0.00
170	Robert L Horbelt School	Cutoff Wall Packs	4,380	1	COMPACT FLUORESCENT 23W HW (2)	46	201	0.05	1	NEW LED WALL PACK 20 WATT	20	88	0.02	114	114	0.00
171	Robert L Horbelt School	Recessed Cans	4,380	2	COMPACT FLUORESCENT 23W HW (2)	46	403	0.09	2	RETROFIT HIGH HAT 12 WATT LED 6 INCH	12	105	0.02	298	298	0.00
	Total: Robert L Horbelt School			1,127			174,622	78.67	1,160			61,725	28.60	112,898	112,898	47.32

GreenTech LIGHTING

	LOCATION:				EXISTING					PROPOSED				SAVINGS		
Line Ref	Building	Location	Existing Hrs. per Year	Existing QTY	Existing Lighting Description	Existing WATT / Fixture	Existing KWH Usage	Existing KW Usage	Proposed QTY	Proposed Lighting Description	Proposed WATT / Fixture	Proposed KWH Usage	Proposed Kw Usage	KWH Saved	Total KWH Saved	KW Saved
1	<u> </u>	2ND FLOOR		0		0	Ü	Ü	0	1 0 0 1	0	ű	Ü		0	0.00
2	Joseph T Donahue Elementary School	Mechanical Room	1,500	_	2L 4' F25 T8 ELE H BALLAST	55	1,155	0.77		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	441	0.29	714	714	0.48
3	Joseph T Donahue Elementary School	Faculty Room	2,500		2L 4' F25 T8 ELE H BALLAST	55	1,238	0.50		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	473	0.19	765	765	0.31
4	Joseph T Donahue Elementary School	(2) Bathrooms	3,860		2L 4' F25 T8 ELE H BALLAST	55	425	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	162	0.04	262	262	0.07
-		2nd Floor Hallways	3,860		2L 4' F25 T8 ELE H BALLAST	55	3,821	0.99		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	1,459	0.38	2,362	2,362	0.61
6	Joseph T Donahue Elementary School	Display	3,860	1	1 LAMP 3 FT F30 T12 STD / STD	46	178	0.05		RETROFIT 3' 1L LED TUBE / SELF BALLAST	10	39	0.01	139	139	0.04
7		Class 207	1,500	12	2L 4' F25 T8 ELE H BALLAST	55	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
8	Joseph T Donahue Elementary School	Class 206	1,500	12	2L 4' F25 T8 ELE H BALLAST	55	990	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
9	Joseph T Donahue Elementary School	Class 205	1,500		2L 4' F25 T8 ELE H BALLAST	55	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
10	Joseph T Donahue Elementary School	Class 204	1,500	12	2L 4' F25 T8 ELE H BALLAST	55	990	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
11	Joseph T Donahue Elementary School	Class 203	1,500		2L 4' F25 T8 ELE H BALLAST	55	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
12	Joseph T Donahue Elementary School	Class 202	1,500	12	2L 4' F25 T8 ELE H BALLAST	55	990	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
13	Joseph T Donahue Elementary School	Class 201	1,500		2L 4' F25 T8 ELE H BALLAST	55	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
14	Joseph T Donahue Elementary School	Class 200	1,500	12	2L 4' F25 T8 ELE H BALLAST	55	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
15		SGI 208	1,500		2L 4' F25 T8 ELE H BALLAST	55	660	0.44		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	252	0.17	408	408	0.27
16	Joseph T Donahue Elementary School	Custodian	400		2L 4' F25 T8 ELE H BALLAST	55	44	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	17	0.04	27	27	0.07
		Mens Room	2,000	6	2L 4' F25 T8 ELE H BALLAST	55	660	0.33		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	252	0.13	408	408	0.20
18	Joseph T Donahue Elementary School	Ladies Room	2,000	6	2L 4' F25 T8 ELE H BALLAST	55	660	0.33		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	252	0.13	408	408	0.20
19	Joseph T Donahue Elementary School	Stairs #1	3,860	4	2L 4' F25 T8 ELE H BALLAST	55	849	0.22		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	324	0.08	525	525	0.14
20	Joseph T Donahue Elementary School	Stairs #2	3,860	4	2L 4' F25 T8 ELE H BALLAST	55	849	0.22		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	324	0.08	525	525	0.14
21		Elevator Room	1,500		2L 4' F25 T8 ELE H BALLAST	55	165	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	63	0.04	102	102	0.07
22		Elevator	3,860		2L 4' F25 T8 ELE H BALLAST	55	425	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	162	0.04	262	262	0.07
23		1ST FLOOR	0,000	0	0	0	420	0.11	0	RETROTTI 4 ZE EED TODE / CEEL DREEROT	0	102	0.04	202	0	0.00
24	Joseph T Donahue Elementary School	Hallway	3,860	_	2L 4' F25 T8 ELE H BALLAST	55	3,821	0.99		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	1,459	0.38	2,362	2,362	0.61
25		Display	3,860	10	1 LAMP 3 FT F30 T12 STD / STD	46	178	0.05		RETROFIT 3' 1L LED TUBE / SELF BALLAST	10	39	0.00	139	139	0.04
26	Joseph T Donahue Elementary School	Class 107	1,500	12	2L 4' F25 T8 ELE H BALLAST	55	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
27	Joseph T Donahue Elementary School	Class 106	1,500		2L 4' F25 T8 ELE H BALLAST	55	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
28	Joseph T Donahue Elementary School	Class 105	1,500		2L 4' F25 T8 ELE H BALLAST	55	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
29	Joseph T Donahue Elementary School	Class 104	1,500		2L 4' F25 T8 ELE H BALLAST	55	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
30		Class 103	1,500		2L 4' F25 T8 ELE H BALLAST	55	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
31		Class 102	1,500		2L 4' F25 T8 ELE H BALLAST	55	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
32	Joseph T Donahue Elementary School	Class 101	1.500	12	2L 4' F25 T8 ELE H BALLAST	55	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
	Joseph T Donahue Elementary School	Class 100	1,500		2L 4' F25 T8 ELE H BALLAST	55	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
	Joseph T Donahue Elementary School		1,500		2L 4' F25 T8 ELE H BALLAST	55	660	0.44		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	252	0.17	408	408	0.27
	Joseph T Donahue Elementary School		2,000		2L 4' F25 T8 ELE H BALLAST	55	660	0.33		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	252	0.13	408	408	0.20
36	,	Boys Room	2,000		2L 4' F25 T8 ELE H BALLAST	55	660	0.33		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	252	0.13	408	408	0.20
	Joseph T Donahue Elementary School		400		2L 4' F25 T8 ELE H BALLAST	55	44	0.33		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	17	0.13	27	27	0.20
38		Large Lobby	3,860		2L 2' BIAX LAMP	71	13,429	3.48		NEW 2X2 LED FLAT PANEL FIXTURE 40 WA	40	7,566	1.96	5,863	5,863	1.52
	Joseph T Donahue Elementary School	9	3,860		3L 4' F25 T8 ELE H BALLAST	83	318	0.08		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	122	0.03	197	197	0.05
		Mail Room	1,800		3L 4' F25 T8 ELE H BALLAST	83	297	0.17		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	113	0.06	184	184	0.10
	Joseph T Donahue Elementary School		3,860		3L 4' F25 T8 ELE H BALLAST	83	318	0.08		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	122	0.03	197	197	0.10
	·	Electrical Room	1,500		2L 4' F25 T8 ELE H BALLAST	55	495	0.33		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	189	0.13	306	306	0.20
	Joseph T Donahue Elementary School		2,000		2L 4' F25 T8 ELE H BALLAST	55	660	0.33		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	252	0.13	408	408	0.20
44	· · · · · · · · · · · · · · · · · · ·	Custodian	400		2L 4' F25 T8 ELE H BALLAST	55	22	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	8	0.02	14	14	0.03
	Joseph T Donahue Elementary School		2,000		2L 4' F25 T8 ELE H BALLAST	55	660	0.00	6	RETROFIT 4 '2L LED TUBE / SELF BALLAST	21	252	0.02	408	408	0.03
46	Joseph T Donahue Elementary School		800		3L 4' F25 T8 ELE H BALLAST	83	66	0.08		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	25	0.03	41	41	0.05
	Joseph T Donahue Elementary School		1,500		2L 4' F25 T8 ELE H BALLAST	55	1,485	0.99		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	567	0.38	918	918	0.61
		Class 122	1,500		2L 4' F25 T8 ELE H BALLAST	55	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
	Joseph T Donahue Elementary School		3,000		EXISTING 2x4 6L T5	351	15,795	5.27		RETROFIT 4' 6L T5 LED TUBE / SELF BALLAS		6,750	2.25	9,045	9,045	3.02
	Joseph T Donahue Elementary School	·	3,000		70 WATT MH FLOOD	92	3,588	1.20		NEW LED FLOOD 14 WATT	14	546	0.18	3,042	3,042	1.01
	Joseph T Donahue Elementary School		800		2L 4' F25 T8 ELE H BALLAST	55	352	0.44		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	134	0.17	218	218	0.27
٧.	a. Liomontary control	- ,	500	J	: : 20 : 0 = 2 = 2 :	-		Ų. i i					U. 1.			

GreenTecl LIGHTING

	LOCATION:				EXISTING					PROPOSED				SAVINGS		
Line Ref	Building	Location	Existing Hrs. per Year	Existing QTY	Existing Lighting Description	Existing WATT / Fixture	Existing KWH Usage	Existing KW Usage	Proposed QTY	Proposed Lighting Description	Proposed WATT / Fixture	Proposed KWH Usage	Proposed Kw Usage	KWH Saved	Total KWH Saved	KW Saved
52	Joseph T Donahue Elementary School	Stage - 8L Sports Light	2,500	13	COMPACT FLUORESCENT (8) LAMP 42 WATT S	336	10,920	4.37	13	NEW LED HIGH BAY 150 WATT	150	4,875	1.95	6,045	6,045	2.42
53	Joseph T Donahue Elementary School	Chair Lift	800	2	2L 4' F25 T8 ELE H BALLAST	55	88	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
54	Joseph T Donahue Elementary School	Stage Storage	800	2	2L 4' F25 T8 ELE H BALLAST	55	88	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	34	0.04	54	54	0.07
55	Joseph T Donahue Elementary School	Music 134A	1,500	17	2L 4' F25 T8 ELE H BALLAST	55	1,403	0.94	17	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	536	0.36	867	867	0.58
56	Joseph T Donahue Elementary School	134A Storage	800	4	2L 4' F25 T8 ELE H BALLAST	55	176	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	67	0.08	109	109	0.14
	Joseph T Donahue Elementary School		1,800	3	3L 4' F25 T8 ELE H BALLAST	83	446	0.25		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	170	0.09	275	275	0.15
58	Joseph T Donahue Elementary School	Gym Office	1,800	1	2L 2' F17 ELE N BALLAST	34	61	0.03	1	RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	25	0.01	36	36	0.02
		Bathroom	2,000	2	2L 4' F25 T8 ELE H BALLAST	55	220	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	84	0.04	136	136	0.07
60		Bathroom	2,000	1	COMPACT FLUORESCENT 13W S/I	13	26	0.01		RELAMP 9 WATT LED A LAMP S/I	9	18	0.01	8	8	0.00
	Joseph T Donahue Elementary School		2,500	6	2L 2' BIAX LAMP	71	1,065	0.43		NEW 2X2 LED FLAT PANEL FIXTURE 40 WA	40	600	0.24	465	465	0.19
62		Library	2,500	6	COMPACT FLUORESCENT 13W HW	13	,			NO CHANGE	0		-		0	0.00
		Library	2,500	52	2L 4' F25 T8 ELE H BALLAST	55	7,150	2.86		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	2,730	1.09	4,420	4,420	1.77
64	Joseph T Donahue Elementary School	Library Office	1,800	4	3L 4' F25 T8 ELE H BALLAST	83	594	0.33		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	227	0.13	367	367	0.20
	·	Book Storage	800		3L 4 F25 T8 ELE H BALLAST 3L 4' F25 T8 ELE H BALLAST	83	264	0.33		RETROFIT 4 3L LED TUBE / SELF BALLAST	32	101	0.13	163	163	0.20
			800													
	Joseph T Donahue Elementary School Joseph T Donahue Elementary School	Supply Room		2	2L 4' F25 T8 ELE H BALLAST	55 0	88	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21 0	34	0.04	54	54 0	0.07 0.00
				1	0	-	470	0.05	Ü	DETROCIT OLD LED TUDE / OFLE DALLA OT	-		0.04	400	Ü	
	·	Lobby Display	3,860	1	1 LAMP 3 FT F30 T12 STD / STD	46	178	0.05		RETROFIT 3' 1L LED TUBE / SELF BALLAST	10	39	0.01	139	139	0.04
69	Joseph T Donahue Elementary School		3,860	4	70 WATT MH FLOOD	92	1,420	0.37		NEW LED FLOOD 14 WATT	14	216	0.06	1,204	1,204	0.31
70		Cafeteria - 8L Sports Light	2,500	25	COMPACT FLUORESCENT (8) LAMP 42 WATT S		21,000	8.40		NEW LED HIGH BAY 150 WATT	150	9,375	3.75	11,625	11,625	4.65
		Receiving	2,000	10	2L 4' F25 T8 ELE H BALLAST	55	1,100	0.55		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	420	0.21	680	680	0.34
		Food Serving	2,000	8	3L 4' F25 T8 ELE H BALLAST	83	1,320	0.66		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	504	0.25	816	816	0.41
73	Joseph T Donahue Elementary School	Faculty Dining	1,800	6	3L 4' F25 T8 ELE H BALLAST	83	891	0.50		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	340	0.19	551	551	0.31
	·	Kitchen	2,000	15	3L 4' F25 T8 ELE H BALLAST	83	2,475	1.24		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	945	0.47	1,530	1,530	0.77
75	Joseph T Donahue Elementary School	Coolers	800	4	60 WATT INCANDESCENT	60	192	0.24	4	RELAMP 9 WATT LED A LAMP S/I	9	29	0.04	163	163	0.20
76	Joseph T Donahue Elementary School	Storage Room	800	6	2L 4' F25 T8 ELE H BALLAST	55	264	0.33		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	101	0.13	163	163	0.20
77	Joseph T Donahue Elementary School	Ladies Room	2,000	1	2L 4' F25 T8 ELE H BALLAST	55	110	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	42	0.02	68	68	0.03
78	Joseph T Donahue Elementary School	Kitchen Office	1,800	2	3L 4' F25 T8 ELE H BALLAST	83	297	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	113	0.06	184	184	0.10
79	Joseph T Donahue Elementary School	Closet	400	1	2L 4' F25 T8 ELE H BALLAST	55	22	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	8	0.02	14	14	0.03
80	Joseph T Donahue Elementary School	Stove Hoods	2,000	4	2L 4' F25 T8 ELE H BALLAST	55	440	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	168	0.08	272	272	0.14
81	Joseph T Donahue Elementary School	Main Office	2,500	11	2L 4' F25 T8 ELE H BALLAST	55	1,513	0.61	11	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	578	0.23	935	935	0.37
82	Joseph T Donahue Elementary School	Work Room	2,500	3	3L 4' F25 T8 ELE H BALLAST	83	619	0.25	3	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	236	0.09	383	383	0.15
83	Joseph T Donahue Elementary School	Files Room	800	2	3L 4' F25 T8 ELE H BALLAST	83	132	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	50	0.06	82	82	0.10
84	Joseph T Donahue Elementary School	Conference Room	2,500	3	2L 4' F25 T8 ELE H BALLAST	55	413	0.17	3	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	158	0.06	255	255	0.10
	Joseph T Donahue Elementary School		2,500	6	COMPACT FLUORESCENT 23W HW	23	345	0.14	6	RETROFIT HIGH HAT 12 WATT LED 8 INCH	12	180	0.07	165	165	0.07
86	Joseph T Donahue Elementary School	Guidance	1,800	2	3L 4' F25 T8 ELE H BALLAST	83	297	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	113	0.06	184	184	0.10
	Joseph T Donahue Elementary School		1,800		2L 2' BIAX LAMP	71	256	0.14		NEW 2X2 LED FLAT PANEL FIXTURE 40 WA	40	144	0.08	112	112	0.06
88	Joseph T Donahue Elementary School	Principal	1,800	4	3L 4' F25 T8 ELE H BALLAST	83	594	0.33	4	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	227	0.13	367	367	0.20
	Joseph T Donahue Elementary School		1,800	_	3L 4' F25 T8 ELE H BALLAST	83	594	0.33		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	227	0.13	367	367	0.20
	Joseph T Donahue Elementary School		3,860		2L 4' F25 T8 ELE H BALLAST	55	425	0.11		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	162	0.04	262	262	0.07
	Joseph T Donahue Elementary School		2,200		3L 4' F25 T8 ELE H BALLAST	83	545	0.11		RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	208	0.09	337	337	0.07
	Joseph T Donahue Elementary School		1,800		4L 4' F25 T8 ELE H BALLAST	110	1,584	0.88		RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	605	0.34	979	979	0.54
	Joseph T Donahue Elementary School		1,800		3L 4' F25 T8 ELE H BALLAST	83	446	0.88		RETROFIT 4 4L LED TOBE / SELF BALLAST	32	170	0.09	275	275	0.34
	Joseph T Donahue Elementary School		1,500	4	2L 4' F25 T8 ELE H BALLAST	55	330	0.22		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	126	0.08	204	204	0.14
	Joseph T Donahue Elementary School		1,500		2L 4' F25 T8 ELE H BALLAST 2L 4' F25 T8 ELE H BALLAST	55 55	165	0.22		RETROFIT 4 2L LED TUBE / SELF BALLAST	21	63	0.08	102	102	0.14
	· · · · · · · · · · · · · · · · · · ·	Hallway			2L 4' F25 T8 ELE H BALLAST 2L 4' F25 T8 ELE H BALLAST					RETROFIT 4' 2L LED TUBE / SELF BALLAST						
	Joseph T Donahue Elementary School Joseph T Donahue Elementary School	-	3,860 3,860	25 1	1 LAMP 3 FT F30 T12 STD / STD	55 46	5,308 178	1.38 0.05		RETROFIT 4 2L LED TUBE / SELF BALLAST	21 10	2,027 39	0.53 0.01	3,281 139	3,281 139	0.85 0.04
	· · · · · · · · · · · · · · · · · · ·			40												
	Joseph T Donahue Elementary School		1,500		2L 4' F25 T8 ELE H BALLAST	55 55	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
	Joseph T Donahue Elementary School		1,500		2L 4' F25 T8 ELE H BALLAST	55 	990	0.66		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
	Joseph T Donahue Elementary School		1,500		2L 4' F25 T8 ELE H BALLAST	55 55	495	0.33		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	189	0.13	306	306	0.20
	Joseph T Donahue Elementary School		1,500		2L 4' F25 T8 ELE H BALLAST	55	1,155	0.77		RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	441	0.29	714	714	0.48
102	Joseph T Donahue Elementary School	C Storage	800	1	2L 4' F25 T8 ELE H BALLAST	55	44	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	17	0.02	27	27	0.03

CUSTOMER: E
LOCATION:
City, State, Zip Code: Barnegat Township School Dist GreenTecl LIGHTING

	LOCATION:				EXISTING					PROPOSED				SAVINGS		
Line Ref	Building	Location	Existing Hrs. per Year	Existing QTY	Existing Lighting Description	Existing WATT / Fixture	Existing KWH Usage	Existing KW Usage	Proposed QTY	Proposed Lighting Description	Proposed WATT / Fixture	Proposed KWH Usage	Proposed Kw Usage	KWH Saved	Total KWH Saved	KW Saved
103	Joseph T Donahue Elementary School	Class D	1,500	12	2L 4' F25 T8 ELE H BALLAST	55	990	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
104	Joseph T Donahue Elementary School	Class D	1,500	1	2L 4' F25 T8 ELE H BALLAST	55	83	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	32	0.02	51	51	0.03
105	Joseph T Donahue Elementary School	Class E	1,500	12	2L 4' F25 T8 ELE H BALLAST	55	990	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
106	Joseph T Donahue Elementary School	Class E Bathroom	2,000	1	2L 4' F25 T8 ELE H BALLAST	55	110	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	42	0.02	68	68	0.03
107	Joseph T Donahue Elementary School	Class F	1,500	12	2L 4' F25 T8 ELE H BALLAST	55	990	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
108	Joseph T Donahue Elementary School	F Bathroom	2,000	1	2L 4' F25 T8 ELE H BALLAST	55	110	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	42	0.02	68	68	0.03
109	Joseph T Donahue Elementary School	SGI Rooms	1,500	16	2L 4' F25 T8 ELE H BALLAST	55	1,320	0.88	16	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	504	0.34	816	816	0.54
110	Joseph T Donahue Elementary School	Class G	1,500	14	2L 4' F25 T8 ELE H BALLAST	55	1,155	0.77	14	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	441	0.29	714	714	0.48
111	Joseph T Donahue Elementary School	G Bath	2,000	1	2L 4' F25 T8 ELE H BALLAST	55	110	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	42	0.02	68	68	0.03
112	Joseph T Donahue Elementary School	Faculty Room	1,800	9	2L 4' F25 T8 ELE H BALLAST	55	891	0.50	9	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	340	0.19	551	551	0.31
113	Joseph T Donahue Elementary School	Bathroom	2,000	1	2L 4' F25 T8 ELE H BALLAST	55	110	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	42	0.02	68	68	0.03
114	Joseph T Donahue Elementary School	Class I	1,500	12	2L 4' F25 T8 ELE H BALLAST	55	990	0.66	12	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	378	0.25	612	612	0.41
115	Joseph T Donahue Elementary School	Boys Room	2,000	6	2L 4' F25 T8 ELE H BALLAST	55	660	0.33	6	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	252	0.13	408	408	0.20
116	Joseph T Donahue Elementary School	Custodian Closet	400	2	2L 4' F25 T8 ELE H BALLAST	55	44	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	17	0.04	27	27	0.07
117	Joseph T Donahue Elementary School	Girls Room	2,000	6	2L 4' F25 T8 ELE H BALLAST	55	660	0.33	6	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	252	0.13	408	408	0.20
118	Joseph T Donahue Elementary School	Possible Emergency Ballast		0	0	0			25	EMERGENCY BALLAST LED	0				0	0.00
119	Joseph T Donahue Elementary School	EXTERIOR		0	0	0			0		0				0	0.00
120	,	Large Wall Sconces	4,380	8	EXISTING DECORATIVE FIXTURES	0			8	NO CHANGE	0				0	0.00
121	Joseph T Donahue Elementary School	Small Wall Sconces	4,380	24	EXISTING DECORATIVE FIXTURES	0			24	NO CHANGE	0				0	0.00
122	Joseph T Donahue Elementary School	Full Face Wall Packs	4,380	30	70 WATT MH WALLPACK	92	12,089	2.76	30	NEW LED WALL PACK 20 WATT	20	2,628	0.60	9,461	9,461	0.00
123	Joseph T Donahue Elementary School	Indirect Floods	4,380	4	75 WATT INCAN FLOOD	75	1,314	0.30	4	RELAMP 20 WATT LED FLOOD S/I	20	350	0.08	964	964	0.00
124	Joseph T Donahue Elementary School	Shoe Box Pole Lights	4,380	27	200 WATT INDUCTION SHOEBOX	200	23,652	5.40	27	NEW LED SHOEBOX LOT 100 WATT ARM	100	11,826	2.70	11,826	11,826	0.00
	Total: Joseph T Donahue Elementary School			986			187,445	75.89	1,066			76,432	30.50	111,013	111,013	40.30

CUSTOMER: E
LOCATION:
City, State, Zip Code: Barnegat Township School Dist GreenTecl LIGHTING

	LOCATION:				EXISTING					PROPOSED				SAVINGS		
Line Ref	Building	Location	Existing Hrs. per Year	Existing QTY	Existing Lighting Description	Existing WATT / Fixture	Existing KWH Usage	Existing KW Usage	Proposed QTY	Proposed Lighting Description	Proposed WATT / Fixture	Proposed KWH Usage	Proposed Kw Usage	KWH Saved	Total KWH Saved	KW Saved
1	Administration Building	Main Entrance	2,500	3	2L 4' F25 T8 ELE H BALLAST	55	413	0.17	3	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	158	0.06	255	255	0.10
2	Administration Building	Closet	400	1	2L 4' F25 T8 ELE H BALLAST	55	22	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	8	0.02	14	14	0.03
3	Administration Building	Conference Room	2,500	6	3L 4' F25 T8 ELE H BALLAST	83	1,238	0.50	6	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	473	0.19	765	765	0.31
4	Administration Building	Hallway	2,500	7	2L 4' F25 T8 ELE H BALLAST	55	963	0.39	7	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	368	0.15	595	595	0.24
5	Administration Building	Side Office	2,500	2	3L 4' F25 T8 ELE H BALLAST	83	413	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	158	0.06	255	255	0.10
6	Administration Building	Files Room	2,500	2	2L 4' F25 T8 ELE H BALLAST	55	275	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	105	0.04	170	170	0.07
7	Administration Building	Reception Area	2,500	5	2L 4' F25 T8 ELE H BALLAST	55	688	0.28	5	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	263	0.11	425	425	0.17
8	Administration Building	Side Office	2,500	6	3L 4' F25 T8 ELE H BALLAST	83	1,238	0.50	6	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	473	0.19	765	765	0.31
9	Administration Building	Side Office	2,500	3	3L 4' F25 T8 ELE H BALLAST	83	619	0.25	3	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	236	0.09	383	383	0.15
10	Administration Building	Side Office	2,500	1	2L 4' F25 T8 ELE H BALLAST	55	138	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	53	0.02	85	85	0.03
11	Administration Building	(2) Bathrooms	2,500	2	2L 4' F25 T8 ELE H BALLAST	55	275	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	105	0.04	170	170	0.07
12	Administration Building	Side Office	2,500	4	2L 4' F25 T8 ELE H BALLAST	55	550	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	210	0.08	340	340	0.14
13	Administration Building	Cubical Office	2,500	2	3L 4' F25 T8 ELE H BALLAST	83	413	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	158	0.06	255	255	0.10
14	Administration Building	Kitchen / Break Room	2,500	2	2L 4' F25 T8 ELE H BALLAST	55	275	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	105	0.04	170	170	0.07
15	Administration Building	Side Office	2,500	2	3L 4' F25 T8 ELE H BALLAST	83	413	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	158	0.06	255	255	0.10
16	Administration Building	Side Office	2,500	4	3L 4' F25 T8 ELE H BALLAST	83	825	0.33	4	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	315	0.13	510	510	0.20
17	Administration Building	Side Office	2,500	2	3L 4' F25 T8 ELE H BALLAST	83	413	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	158	0.06	255	255	0.10
18	Administration Building	Side Office	2,500	2	3L 4' F25 T8 ELE H BALLAST	83	413	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	158	0.06	255	255	0.10
19	Administration Building	Cubical Office	2,500	1	3L 4' F25 T8 ELE H BALLAST	83	206	0.08	1	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	79	0.03	128	128	0.05
20	Administration Building	Cubical Office	2,500	2	2L 4' F25 T8 ELE H BALLAST	55	275	0.11	2	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	105	0.04	170	170	0.07
21	Administration Building	Main Receptionist Office	2,500	2	3L 4' F25 T8 ELE H BALLAST	83	413	0.17	2	RETROFIT 4' 3L LED TUBE / SELF BALLAST	32	158	0.06	255	255	0.10
	Total: Administration Building			61			10,472	4.24	61			3,998	1.62	6,474	6,474	2.62

GreenTecl LIGHTING

	LOCATION:				EXISTING					PROPOSED				SAVINGS		
Line Ref	Building	Location	Existing Hrs. per Year	Existing QTY	Existing Lighting Description	Existing WATT / Fixture	Existing KWH Usage	Existing KW Usage	Proposed QTY	Proposed Lighting Description	Proposed WATT / Fixture	Proposed KWH Usage	Proposed Kw Usage	KWH Saved	Total KWH Saved	KW Saved
1	Transportation / Buildings & Grounds	Warehouse	2,500	21	2L 8' T8 F96 ELE N BALLAST	95	4,988	2.00	21	RETROFIT 8' 2L TO 4' 4 LED TUBE /SELF BA	42	2,205	0.88	2,783	2,783	1.11
2	Transportation / Buildings & Grounds	Warehouse Office	2,500	6	2L 4' F25 T8 ELE H BALLAST	55	825	0.33	6	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	315	0.13	510	510	0.20
3	Transportation / Buildings & Grounds	Transportation & Grounds Offi	2,500	4	4L 4' F25 T8 ELE H BALLAST	110	1,100	0.44	4	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	420	0.17	680	680	0.27
4	Transportation / Buildings & Grounds	Transportation & Grounds Offi	2,500	1	2L 4' F25 T8 ELE H BALLAST	55	138	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	53	0.02	85	85	0.03
5	Transportation / Buildings & Grounds	Side Office	2,500	2	4L 4' F25 T8 ELE H BALLAST	110	550	0.22	2	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	210	0.08	340	340	0.14
6	Transportation / Buildings & Grounds	Side Office	2,500	1	4L 4' F25 T8 ELE H BALLAST	110	275	0.11	1	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	105	0.04	170	170	0.07
7	Transportation / Buildings & Grounds	Copier Room	2,500	1	4L 4' F25 T8 ELE H BALLAST	110	275	0.11	1	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	105	0.04	170	170	0.07
8	Transportation / Buildings & Grounds	Side Office	2,500	1	4L 4' F25 T8 ELE H BALLAST	110	275	0.11	1	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	105	0.04	170	170	0.07
9	Transportation / Buildings & Grounds	Mechanical Room	1,500	1	60 WATT INCANDESCENT	60	90	0.06	1	RELAMP 9 WATT LED A LAMP S/I	9	14	0.01	77	77	0.05
10	Transportation / Buildings & Grounds	Hallway	2,500	1	2L 4' F25 T8 ELE H BALLAST	55	138	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	53	0.02	85	85	0.03
11	Transportation / Buildings & Grounds	Neil Piro's Office	2,500	1	4L 4' F25 T8 ELE H BALLAST	110	275	0.11	1	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	105	0.04	170	170	0.07
12	Transportation / Buildings & Grounds	Supply Room	800	1	4L 4' F25 T8 ELE H BALLAST	110	88	0.11	1	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	34	0.04	54	54	0.07
13	Transportation / Buildings & Grounds	Pantry	2,500	1	2L 2' F17 ELE N BALLAST	34	85	0.03	1	RETROFIT 2' 2L LED TUBE / SELF BALLAST	14	35	0.01	50	50	0.02
14	Transportation / Buildings & Grounds	Bathroom	2,500	1	60 WATT INCANDESCENT	60	150	0.06	1	RELAMP 9 WATT LED A LAMP S/I	9	23	0.01	128	128	0.05
15	Transportation / Buildings & Grounds	Bus Garage	2,500	18	2L 8' T8 F96 ELE N BALLAST	95	4,275	1.71	18	RETROFIT 8' 2L TO 4' 4 LED TUBE /SELF BA	42	1,890	0.76	2,385	2,385	0.95
16	Transportation / Buildings & Grounds	Parts Room	2,500	3	2L 8' T8 F96 ELE N BALLAST	95	713	0.29	3	RETROFIT 8' 2L TO 4' 4 LED TUBE /SELF BAI	42	315	0.13	398	398	0.16
17	Transportation / Buildings & Grounds	Parts Room	2,500	1	4L 4' F25 T8 ELE H BALLAST	110	275	0.11	1	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	105	0.04	170	170	0.07
18	Transportation / Buildings & Grounds	Loft	800	2	2L 8' T8 F96 ELE N BALLAST	95	152	0.19	2	RETROFIT 8' 2L TO 4' 4 LED TUBE /SELF BAI	42	67	0.08	85	85	0.11
19	Transportation / Buildings & Grounds	Office	2,500	1	4L 4' F25 T8 ELE H BALLAST	110	275	0.11	1	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	105	0.04	170	170	0.07
20	Transportation / Buildings & Grounds	Tank Room	2,500	2	4L 4' F25 T8 ELE H BALLAST	110	550	0.22	2	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	210	0.08	340	340	0.14
21	Transportation / Buildings & Grounds	Tire Room	2,500	2	4L 4' F25 T8 ELE H BALLAST	110	550	0.22	2	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	210	0.08	340	340	0.14
22	Transportation / Buildings & Grounds	(2) Bathroom	2,500	2	60 WATT INCANDESCENT	60	300	0.12	2	RELAMP 9 WATT LED A LAMP S/I	9	45	0.02	255	255	0.10
23	Transportation / Buildings & Grounds	Bus Drivers Lounge Hallway	1,000	1	2L 4' F25 T8 ELE H BALLAST	55	55	0.06	1	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	21	0.02	34	34	0.03
24	Transportation / Buildings & Grounds	(2) Bathroom	1,000	4	60 WATT INCANDESCENT	60	240	0.24	4	RELAMP 9 WATT LED A LAMP S/I	9	36	0.04	204	204	0.20
25	Transportation / Buildings & Grounds	Files Room	1,000	3	4L 4' F25 T8 ELE H BALLAST	110	330	0.33	3	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	126	0.13	204	204	0.20
26	Transportation / Buildings & Grounds	Kitchen / Drivers Lounge	1,000	10	4L 4' F25 T8 ELE H BALLAST	110	1,100	1.10	10	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	420	0.42	680	680	0.68
27	Transportation / Buildings & Grounds	Large Storage	800	28	4L 4' F25 T8 ELE H BALLAST	110	2,464	3.08	28	RETROFIT 4' 4L LED TUBE / SELF BALLAST	42	941	1.18	1,523	1,523	1.90
28	Transportation / Buildings & Grounds	Large Storage	800	4	2L 4' F25 T8 ELE H BALLAST	55	176	0.22	4	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	67	0.08	109	109	0.14
29	Transportation / Buildings & Grounds	Large Storage	800	5	65 WATT INCAN FLOOD	65	260	0.33	5	RELAMP 15 WATT LED FLOOD S/I	15	60	0.08	200	200	0.25
30	Transportation / Buildings & Grounds	Bus Drivers Lockers	1,000	9	2L 4' F25 T8 ELE H BALLAST	55	495	0.50	9	RETROFIT 4' 2L LED TUBE / SELF BALLAST	21	189	0.19	306	306	0.31
31	Transportation / Buildings & Grounds	Exterior Lighting		0	0	0			0		0				0	0.00
32	Transportation / Buildings & Grounds	Wall Mount Flood Fixtures	4,380	3	250 WATT MH FLOOD	295	3,876	0.89	3	NEW LED FLOOD 52 WATT	52	683	0.16	3,193	3,193	0.00
33	Transportation / Buildings & Grounds	Full Face Wall Packs	4,380	2	100 WATT HPS WALLPACK	120	1,051	0.24	2	NEW LED WALL PACK 20 WATT	20	175	0.04	876	876	0.00
34	Transportation / Buildings & Grounds	Full Face Wall Packs	4,380	1	250 WATT MH WALLPACK	295	1,292	0.30	1	NEW LED WALL PACK 20 WATT	20	88	0.02	1,205	1,205	0.00
35	Transportation / Buildings & Grounds	Screw In Floods	4,380	2	65 WATT INCAN FLOOD	65	569	0.13	2	RELAMP 15 WATT LED FLOOD S/I	15	131	0.03	438	438	0.00
36	Transportation / Buildings & Grounds	Wall Mount Incandescents	4,380	4	60 WATT INCANDESCENT	60	1,051	0.24	4	RELAMP 9 WATT LED A LAMP S/I	9	158	0.04	894	894	0.00
	Total: Transportation / Buildings &															
	Grounds			150			29,300	14.40	192			9,822	5.19	19,478	19,478	7.70
	Grand Total						1,080,458	450.56	6,603					649,516		247.99

LOCATION: LOCATION:
City, State, Zip Code: City, State, Zip Code:

CUSTOMER:

ty, State, Zip Code:

City, State, Zip Code:

0

	LOCATION:			EXIST	ING LIG	HTING CONTROL		I	PROPOSED LIGHTING CONTRO	LS		
Line Ref	Building	Location	EXISTING CONTROL	Existing Hrs. per Year	Lighting Qty	LIGHTING DESCRIPTION	WATT / Fixture	Control QTY	Control Description	Control Hours Reduced	New Hrs. (controlled)	KWH Saved from controls
	Barnegat High School	Main Entry		3,860	6	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0		(0
	Barnegat High School	Main Lobby - Large Salad Boy		3,860	3	EXISTING DECORATIVE FIXTURES	0	0	0			0
	Barnegat High School	Main Lobby - Small Salad Boy		3,860	4	EXISTING DECORATIVE FIXTURES	0	0	0			0
	Barnegat High School	Main Lobby		3,860	44	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
	Barnegat High School	Main Lobby		3,860	5	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
	Barnegat High School	Main Office		1,800	21	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Main Office		1,800	2	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
	Barnegat High School	Conference Room		1,800	6	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Assistant Principal		1,800	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Assistant Principal		1,800	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Work Room		1,800	3	RETROFIT 4 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Principal		1,800		RETROFIT 4 3L LED TUBE / SELF BALLA	32	0	0			0
		Bathroom		2,000	1	RETROFIT 4 3L LED TUBE / SELF BALLA	14	0	0			0
	Barnegat High School Barnegat High School	Office #6		1,800	2	RETROFIT 2 2L LED TUBE / SELF BALLA	32	0	0			0
		Attend. Office		1,800	1	RETROFIT 4 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School				2	RETROFIT 4 3L LED TUBE / SELF BALLA			0			
	Barnegat High School	Rogers Office		1,800	2		32	0	0			0
	Barnegat High School	Office #2		1,800	4	RETROFIT 4'3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Office #5		1,800	2	RETROFIT 4'3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Office #3		1,800	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Office #4		1,800	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	HALLS & BATHROOMS - Nev			0	0	0	0	0			0
	Barnegat High School	End Office		1,800	3	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	Ŭ	0			0
	Barnegat High School	Mail Room		2,500	1	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	Ü	0			0
	Barnegat High School	Security		1,800	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	Ü	0			0
	Barnegat High School	Library		2,500	85	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Library		2,500	8	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
	Barnegat High School	Library		2,500	11	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
	Barnegat High School	Library		2,500	6	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	Ü	0			0
	Barnegat High School	Side Entry		3,860	2	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
	Barnegat High School	Periodicals		800	4	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
31	Barnegat High School	Data Room		800	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
32	Barnegat High School	Library 1 / Computers		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
33	Barnegat High School	Concession		800	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
34	Barnegat High School	Library 2		1,500	17	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
35	Barnegat High School	Library Workroom		1,800	3	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
36	Barnegat High School	Library 3		1,500	13	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
37	Barnegat High School	Trophy Cases		3,860	9	RETROFIT 3' 1L LED TUBE / SELF BALLA	10	0	0			0
38	Barnegat High School	Gym Lobby		3,860	74	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
39	Barnegat High School	Gym Lobby - Salad Bowl Fixtu		3,860	4	EXISTING DECORATIVE FIXTURES	0	0	0			0
40	Barnegat High School	Main Gym		3,000	60	RETROFIT 4' 4L T5 LED TUBE / SELF BAL	100	0	0			0
41	Barnegat High School	Weight Room		3,000	20	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
42	Barnegat High School	Trainers Room		2,500	7	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
43	Barnegat High School	Trainers Room		2,500	1	RETROFIT 2' 2L LED TUBE / SELF BALLA	14	0	0			0
44	Barnegat High School	Gym Storage		800	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
45	Barnegat High School	Mechanical Room		1,500	6	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
46	Barnegat High School	Storage Room		800	1	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
47	Barnegat High School	Storage Room		800	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0

0

GreenTech Energy Services
LIGHTING CONTROL

LOCATION:
City, State, Zip Code:
City, State, Zip Code:
0

	LOCATION:			EXIST	ING LIG	HTING CONTROL		F	PROPOSED LIGHTING CONTRO	LS		
Line	Duilding	Location	EVICTING CONTROL	Existing Hrs. per	Lighting Qty	LIGHTING DESCRIPTION		Control		Control Hours	New Hrs.	KWH Saved from
Ref	Building	Location	EXISTING CONTROL	Year	-	LIGHTING DESCRIPTION	Fixture	QTY	Control Description	Reduced	(controlled)	controls
	Barnegat High School	Stage - N/A				0	0	ŭ	0			0
	Barnegat High School	Mechanical Room M3		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA		Ü	0			0
	Barnegat High School	Mechanical Room M2		1,500	2	RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Boys Room		2,000	4	RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Boys Room		2,000	1	RETROFIT HIGH HAT 12 WATT LED 6 INC		0	0			0
	Barnegat High School	Boys Room		2,000	2	RETROFIT 3' 2L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Girls Room		2,000	4	RETROFIT 4' 2L LED TUBE / SELF BALLA		Ü	0			0
	Barnegat High School	Girls Room		2,000	1	RETROFIT HIGH HAT 12 WATT LED 6 INC		Ü	0			0
	Barnegat High School	Girls Room		2,000	2	RETROFIT 3' 2L LED TUBE / SELF BALLA		ŭ	0			0
	Barnegat High School	E101 Entry		3,860	2	RETROFIT HIGH HAT 12 WATT LED 6 INC		Ü	0			0
58	Barnegat High School	E101 - New LED		_	0	0	0	Ü	0			0
	Barnegat High School	E103 - New LED			0	DETROEIT 41 01 1 ED TURE (CEL E D	0	0	0			0
	Barnegat High School	E103 Side Rooms		800	3	RETROFIT 4' 3L LED TUBE / SELF BALLA		Ü	0			0
	Barnegat High School	E105 Class		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA		U	0			0
	Barnegat High School	E105 Class		1,500	5	RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Storage S7		800	2	RETROFIT 4' 2L LED TUBE / SELF BALLA		Ü	0			0
	Barnegat High School	Nurse Office		1,800	9	RETROFIT 4' 3L LED TUBE / SELF BALLA		Ü	0			0
	Barnegat High School	Lockers Lobby		3,860	4	RETROFIT HIGH HAT 12 WATT LED 6 INC		Ü	0			0
	Barnegat High School	Boys Lockers		3,000	19	RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Boys Lockers		3,000	1	RETROFIT HIGH HAT 12 WATT LED 6 INC		U	0			0
	Barnegat High School	Boys Lockers		3,000	2	RETROFIT 4' 2L LED TUBE / SELF BALLA		Ü	0			0
	Barnegat High School	Boys Lockers		3,000	4	RETROFIT 3' 2L LED TUBE / SELF BALLA		Ü	0			0
	Barnegat High School	Coaches Office		2,500	2	RETROFIT 4' 3L LED TUBE / SELF BALLA		Ü	0			0
	Barnegat High School	Coaches Office		2,500	3	RETROFIT HIGH HAT 12 WATT LED 6 INC		Ü	0			0
	Barnegat High School	Gym Side Hall		3,860	4	RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
73	Barnegat High School	Girls Lockers		3,000	1	RETROFIT HIGH HAT 12 WATT LED 6 INC		0	0			0
	Barnegat High School	Girls Lockers		3,000	2	RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Girls Lockers		3,000	4	RETROFIT 3' 2L LED TUBE / SELF BALLA		0	0			0
76	Barnegat High School	Girls Lockers		3,000	2	RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
77	Barnegat High School	Girls Lockers		3,000	3	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
	Barnegat High School	Wrestling		3,000	20	RETROFIT 4' 4L T5 LED TUBE / SELF BAL	100	0	0			0
	Barnegat High School	Wrestling		3,000	2	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
80	Barnegat High School	S6 Storage		800	6	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
81	Barnegat High School	Athletics		1,800	6	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
82	Barnegat High School	Guidance Entry		1,800	1	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
83	Barnegat High School	Guidance Conference Room		1,800	4	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
84	Barnegat High School	Janitor JCJ		400	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
85	Barnegat High School	Hall Bathroom		2,000	1	RETROFIT 2' 2L LED TUBE / SELF BALLA	14	0	0			0
86	Barnegat High School	Faculty Dining		1,800	21	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
87	Barnegat High School	Upper Mechanical Room		1,500	22	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
88	Barnegat High School	Upper Mech. Room - Emer B	a	1,500	0	0	0	0	0			0
89	Barnegat High School	Data Room 3		800	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
90	Barnegat High School	Electrical Room		1,500	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
91	Barnegat High School	Gym #2		3,000	24	RETROFIT 4' 4L T5 LED TUBE / SELF BAL	100	0	0			0
92	Barnegat High School	Gym Storage		800	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
93	Barnegat High School	(2) Hall Bathrooms		2,000	6	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
94	Barnegat High School	(2) Hall Bathrooms		2,000	4	RETROFIT 3' 2L LED TUBE / SELF BALLA	20	0	0			0

LOCATION: LOCATION:
City, State, Zip Code: City, State, Zip Code:

	LOCATION:			EXIST	ING LIC	HTING CONTROL		F	PROPOSED LIGHTING CONTRO	DLS		
Line	Puilding	Location	EVICTING CONTROL	Existing Hrs. per	Lighting Qty	LICUTING DESCRIPTION	WATT /	Control	Control Description	Control Hours	New Hrs.	KWH Saved from
Ref	Building	Location	EXISTING CONTROL	Year		LIGHTING DESCRIPTION	Fixture	QTY	Control Description	Reduced	(controlled)	controls
	Barnegat High School	(2) Hall Bathrooms		2,000	4	RETROFIT 2' 2L LED TUBE / SELF BALLA	14		0			0
96	Barnegat High School	Cafeteria Entry		3,860	6	RETROFIT HIGH HAT 12 WATT LED 6 INC	12		0			0
	Barnegat High School	S4 Storage		800	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32		0			0
98	Barnegat High School	Student Store		800	3	RETROFIT 4' 3L LED TUBE / SELF BALLA		-	0			0
99	Barnegat High School	JC6 Closet		400	2	RETROFIT 4' 2L LED TUBE / SELF BALLA		ŭ	0			0
	Barnegat High School	Kitchen Serving		1,800	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	-	ŭ	0			0
	Barnegat High School	Kitchen Serving		1,800		RELAMP 9 WATT LED A LAMP S/I	9	ŭ	0			0
	Barnegat High School	Kitchen		2,000		RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Stove Hoods		2,000		RETROFIT 4' 2L LED TUBE / SELF BALLA		Ü	0			0
104	Barnegat High School	Lockers / Bathroom		2,000	2	RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
105	Barnegat High School	Mop Room		400	1	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
106	Barnegat High School	Coolers		800	6	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
107	Barnegat High School	Coolers		800	2	RELAMP 9 WATT LED A LAMP S/I	9	0	0			0
108	Barnegat High School	Facilities		2,500	8	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
109	Barnegat High School	West Stairs		3,860	7	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
110	Barnegat High School	West Stairs		3,860	0	0	0	0	0			0
111	Barnegat High School	West Stairs		3,860	1	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
112	Barnegat High School	Class B213		1,500	15	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
113	Barnegat High School	Prep B211A		1,500	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
114	Barnegat High School	Class B212		1,500	15	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
115	Barnegat High School	Prep B210A		1,500	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
116	Barnegat High School	Class B210		1,500	15	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
117	Barnegat High School	Class B211		1,500	15	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
118	Barnegat High School	Class B208		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
119	Barnegat High School	Class B206		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
120	Barnegat High School	Class B209		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
121	Barnegat High School	Class B207		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
122	Barnegat High School	Class B204		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
123	Barnegat High School	Class B203		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Class B205		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
125	Barnegat High School	Mens Room		2,000	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Barnegat High School	Mens Room		2,000	2	RETROFIT 3' 2L LED TUBE / SELF BALLA			0			0
	Barnegat High School	Mens Room		2,000		RETROFIT HIGH HAT 12 WATT LED 6 IN			0			0
	Barnegat High School	JC4 Closet		400		RETROFIT 2' 2L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Faculty Bathroom		2,000		RETROFIT 2' 2L LED TUBE / SELF BALLA			0			0
	Barnegat High School	Girls Room		2,000		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Barnegat High School	Girls Room		2,000		RETROFIT 3' 2L LED TUBE / SELF BALLA			0			0
	Barnegat High School	Girls Room		2,000	1	RETROFIT HIGH HAT 12 WATT LED 6 INC			0			0
	Barnegat High School	Hall Storage		800	3	RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Barnegat High School	Elevator		3,860	2	RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Barnegat High School	Class B202		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
	Barnegat High School	Class B201		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
	Barnegat High School	Class C210		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
	Barnegat High School	Stairs		3,860	7	RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Barnegat High School	Stairs		3,860	0	0	0		0			0
	Barnegat High School	Stairs		3,860	2	RETROFIT HIGH HAT 12 WATT LED 6 INC			0			0
	Barnegat High School	Girls Room		2,000	5	RETROFIT HIGH HAT 12 WATT LED 6 INC			0			0
141	Dameyat Figh School	GIIIS KUUIII		2,000	J	VE IVOLII 4 ST TED INRE / SETL BATTA	∠1	0	U		1	U

CUSTOMER:

GreenTech Energy Services
LIGHTING CONTROL

LOCATION:
City, State, Zip Code:
City, State, Zip Code:
0

	LOCATION:		EXIST	ING LIG	HTING CONTROL		ı	PROPOSED LIGHTING CONTRO	LS			
Line Ref	Building	Location	EXISTING CONTROL	Existing Hrs. per Year	Lighting Qty	LIGHTING DESCRIPTION	WATT / Fixture	Control QTY	Control Description	Control Hours Reduced	New Hrs. (controlled)	KWH Saved from controls
1/12	Barnegat High School	Girls Room		2,000	2	RETROFIT 3' 2L LED TUBE / SELF BALLA	20		0		,	0
	Barnegat High School	Girls Room		2,000	1	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
	Barnegat High School	Class C209A		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Faculty Bathroom		2,000	1	RETROFIT 2' 2L LED TUBE / SELF BALLA	14	0	0			0
	Barnegat High School	Janitor Closet		400	1	RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Barnegat High School	Boys Room		2,000	5	RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
	Barnegat High School	Boys Room		2,000	1	RETROFIT 2' 2L LED TUBE / SELF BALLA	14	0	0			0
	Barnegat High School	Boys Room		2,000	1	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
	Barnegat High School	Mechanical M5		1,500	8	RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Class C209		1,500	8	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	S17 Storage		800	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Barnegat High School	Class C208		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Class C207		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Class C205		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Class C206		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Class C200		1,500	2	RETROFIT 4 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Class C204		1,500	14	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Prep Room		1,500	3	RETROFIT 4 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Class C202		1,500	14	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	S16 Storage		800	4	RETROFIT 4 3L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Stairs #4		3,860	7	RETROFIT 4 2L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Stairs #4		3,860	0	n	0	0	0			0
	Barnegat High School	Stairs #4		3,860	2	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
	Barnegat High School	Class C201		1,500	12	RETROFIT HIGH HAT 12 WATT LED 6 INC		0	0			0
	Barnegat High School	Girls Room		2,000	12	RETROFIT 4 3L LED TUBE / SELF BALLA		0	0			0
		Girls Room		2,000	2	RETROFIT 4 2L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Girls Room		2,000	1	COMPACT FLUORESCENT 23W HW	23	0	0			0
	Barnegat High School			2,000	1	RETROFIT 2' 2L LED TUBE / SELF BALLA	14	0	0			0
	Barnegat High School	Faculty Bathroom			1	RETROFIT 2 2L LED TUBE / SELF BALLA			0			
	Barnegat High School	Boys Room Boys Room		2,000 2,000	2	RETROFIT 4 2L LED TUBE / SELF BALLA	21 20	0	0			0
	Barnegat High School	Boys Room			1	COMPACT FLUORESCENT 23W HW	23		0			0
	Barnegat High School	South Stairs		2,000	7	RETROFIT 4' 2L LED TUBE / SELF BALLA		-	0			ŭ
	Barnegat High School	South Stairs South Stairs		3,860 3,860	0	n n n n n n n n n n n n n n n n n n n	21 0		0			0
	Barnegat High School				2	U RETROFIT HIGH HAT 12 WATT LED 6 INC	-	0	0			
	Barnegat High School Barnegat High School	South Stairs Class A204		3,860 1,500	6	RETROFIT HIGH HAT 12 WATT LED 6 INC	12 32	0	0			0
					2				0			
	Barnegat High School	S11 Storage	+	800 4 500	6	RETROFIT 4' 3L LED TUBE / SELF BALLA RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Class A200	+	1,500	<i>0</i>			0	0			0
	Barnegat High School	Class A202		1,500	40	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Class A201		1,500	10 8	RETROFIT 4'3L LED TUBE / SELF BALLA	32	_	0			0
	Barnegat High School	Class A203		1,500	-	RETROFIT 4: 3L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Class A205		1,500	8	RETROFIT 4: 3L LED TUBE / SELF BALLA		-	0			0
	Barnegat High School	Class A205A		1,500	8	RETROFIT 4'3L LED TUBE / SELF BALLA			0			0
	Barnegat High School	Class A207		1,500		RETROFIT 4'3L LED TUBE / SELF BALLA	32		0			0
	Barnegat High School	Class A209		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA	32	-	0			0
	Barnegat High School	Class A208		1,500		RETROFIT 4'3L LED TUBE / SELF BALLA		Ŭ	0			0
	Barnegat High School Barnegat High School	S-15 Storage Class A210		800 1,500	3 12	RETROFIT 4' 2L LED TUBE / SELF BALLA RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0

LOCATION:
City, State, Zip Code:
City, State, Zip Code:
0

	LOCATION:			EXIST	ING LIG	HTING CONTROL		F	PROPOSED LIGHTING CONTRO	LS		
Line	Building	Location	EVICTING CONTROL	Existing Hrs. per	Lighting Qty	LIGHTING DESCRIPTION	WATT /	Control		Control Hours	New Hrs.	KWH Saved from
Ref	<u> </u>	Location	EXISTING CONTROL	Year	4.0	LIGHTING DESCRIPTION	Fixture	QTY	Control Description	Reduced	(controlled)	controls
	Barnegat High School	Class A212		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA		ŭ	0			0
	Barnegat High School	Class A211		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA		Ü	0			0
	Barnegat High School	Class A213		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	EC2 Electrical		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Data Room		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Class A214		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	North Stairs		3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA		Ü	0			0
	Barnegat High School	North Stairs		3,860	0	0	0	Ü	0			0
	Barnegat High School	2nd Floor Hallways		3,860	46	RETROFIT HIGH HAT 12 WATT LED 6 INC		Ü	0			0
	Barnegat High School	2nd Floor Hallways - Large Sa		3,860		EXISTING DECORATIVE FIXTURES	0	Ü	0			0
199	Barnegat High School	1ST FLOOR CONTINUED			ŭ	0	0	Ü	0			0
200	Barnegat High School	Class B110		1,500	34	RETROFIT 4' 2L LED TUBE / SELF BALLA		U	0			0
201	Barnegat High School	B108A		1,500	2	RETROFIT 4' 3L LED TUBE / SELF BALLA		Ü	0			0
	Barnegat High School	Class B108		1,500	34	RETROFIT 4' 2L LED TUBE / SELF BALLA		U	0			0
	Barnegat High School	Class B106		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	B106 Office		1,800	2	RETROFIT 4' 3L LED TUBE / SELF BALLA		Ü	0			0
	Barnegat High School	B106 Studio		1,800	4	RETROFIT 4' 3L LED TUBE / SELF BALLA		Ü	0			0
	Barnegat High School	Class B104		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA		Ü	0			0
	Barnegat High School	Hallway Recessed Cans		3,860	41	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
208	Barnegat High School	Mens Room		2,000	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
209	Barnegat High School	Mens Room		2,000	2	RETROFIT 3' 2L LED TUBE / SELF BALLA	20	0	0			0
210	Barnegat High School	Mens Room		2,000	1	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
211	Barnegat High School	JC2 Closet		400	1	RETROFIT 2' 2L LED TUBE / SELF BALLA	14	0	0			0
212	Barnegat High School	Ladies Room		2,000	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
213	Barnegat High School	Ladies Room		2,000	2	RETROFIT 3' 2L LED TUBE / SELF BALLA	20	0	0			0
214	Barnegat High School	Ladies Room		2,000	1	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
215	Barnegat High School	Faculty Room		2,500	3	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
216	Barnegat High School	Elevator Room		1,500	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
217	Barnegat High School	Electrical Room		1,500	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
218	Barnegat High School	Data Room #4		1,500	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
219	Barnegat High School	Class A110		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
220	Barnegat High School	S12 Storage		800	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
221	Barnegat High School	Ladies Room		2,000	3	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
222	Barnegat High School	Ladies Room		2,000	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
223	Barnegat High School	Ladies Room		2,000	2	RETROFIT 3' 2L LED TUBE / SELF BALLA	20	0	0			0
224	Barnegat High School	Ladies Room		2,000	3	RETROFIT 3' 3L LED TUBE / SELF BALLA	30	0	0			0
225	Barnegat High School	Faculty Bathroom		2,000	1	RETROFIT 2' 2L LED TUBE / SELF BALLA	14	0	0			0
226	Barnegat High School	Janitor		400	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
227	Barnegat High School	Boys Room		2,000	3	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Boys Room		2,000	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Barnegat High School	Boys Room		2,000	2	RETROFIT 3' 2L LED TUBE / SELF BALLA	20	0	0			0
230	Barnegat High School	Boys Room		2,000	1	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
231	Barnegat High School	S3 Storage		800	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Barnegat High School	Class A101 Storage		800		RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	Kiln Room		800	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	A102 Storage		800		RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
	Barnegat High School	A102 Display		800		RETROFIT 3' 1L LED TUBE / SELF BALLA		0	0			0

LOCATION:
City, State, Zip Code:
City, State, Zip Code:
0

	LOCATION:			EXIST	ING LIG	HTING CONTROL		ı	PROPOSED LIGHTING CONTRO	LS		
Line				Existing Hrs. per	Lighting Qty		WATT/	Control		Control Hours	New Hrs.	KWH Saved from
Ref	Building	Location	EXISTING CONTROL	Year		LIGHTING DESCRIPTION	Fixture	QTY	Control Description	Reduced	(controlled)	controls
236	Barnegat High School	Data Closet		800	1	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
237	Barnegat High School	Class C110		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
238	Barnegat High School	Class C109A		1,500	8	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
239	Barnegat High School	Girls Room		2,000	6	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
240	Barnegat High School	Girls Room		2,000	2	RETROFIT 3' 2L LED TUBE / SELF BALLA	20	0	0			0
241	Barnegat High School	Girls Room		2,000	1	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
242	Barnegat High School	Faculty Bathroom		2,000	1	RETROFIT 2' 2L LED TUBE / SELF BALLA	14	0	0			0
243	Barnegat High School	Janitor		400	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
244	Barnegat High School	Boys Room		2,000	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
245	Barnegat High School	Boys Room		2,000	2	RETROFIT 3' 2L LED TUBE / SELF BALLA	20	0	0			0
246	Barnegat High School	Boys Room		2,000	3	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
247	Barnegat High School	Boys Room		2,000	1	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
248	Barnegat High School	Class C109		1,500	8	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
249	Barnegat High School	Mechanical Room		1,500	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
250	Barnegat High School	Hall Storage		800	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
251	Barnegat High School	Class C108		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
252	Barnegat High School	Class C107		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
253	Barnegat High School	Class C105		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
254	Barnegat High School	Class C106		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
255	Barnegat High School	Class C103		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
256	Barnegat High School	Class C104		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
257	Barnegat High School	Prep Room		1,500	3	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Class C102		1,500	14	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
259	Barnegat High School	Class C101		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Hallways		3,860	57	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
	Barnegat High School	Hallways - Large Salad Bowls		3,860	2	EXISTING DECORATIVE FIXTURES	0	0	0			0
	Barnegat High School	Football Building		3,000	25	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Barnegat High School	Football Building		3,000	6	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	0	0			0
	Barnegat High School	Bathroom		3,860	2	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	0	0			0
	Barnegat High School	Bathroom		3,860	2	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	0	0			0
	Barnegat High School	Office		2,500	2	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	0	0			0
	Barnegat High School	Mop Closet		400	1	RELAMP 9 WATT LED A LAMP S/I	9	0	0			0
	Barnegat High School	Hallway Emergency Ballast		3,860	0	0	0	0	0			0
	Barnegat High School	Exterior Lighting		,	0	0	0	0	0			0
	Barnegat High School	Main Canopies		4,380	6	RETROFIT HIGH HAT 12 WATT LED 6 IN(12		0			0
	Barnegat High School	Main Canopies		4,380	6	RETROFIT HIGH HAT 12 WATT LED 6 INC			0			0
	Barnegat High School	Main Canopies		4,380	8	RETROFIT HIGH HAT 12 WATT LED 6 INC			0			0
	Barnegat High School	Full Face Wall Packs		4,380	29	NEW LED WALL PACK 20 WATT	20	0	0			0
	Barnegat High School	Wall Mount Floods		4,380	18	NEW LED FLOOD 52 WATT	52		0			0
	Barnegat High School	PL Wall Packs		4,380	8	NEW LED WALL PACK 20 WATT	20	0	0			0
	Barnegat High School	Cutoff Wall Packs		4,380	23	NEW LED WALL PACK 20 WATT	20		0			0
	Barnegat High School	Shoe Box Pole Lights		4,380	79	NEW LED SHOEBOX LOT 100 WATT ARN		0	0			0
	Barnegat High School	(13) LED Wall Packs		.,550	0	0	0	0	0			0
	Barnegat High School	FOOTBALL BUILDING EXTE	F		0	0	0	0	0			0
	Barnegat High School	Wall Mount Floods		4,380	2	NEW LED FLOOD 14 WATT	14	0	0			0
	Barnegat High School	Cutoff Wall Packs		4,380	1	NEW LED WALL PACK 20 WATT	20		0			0
	Barnegat High School	#1 Courtyard Wall Packs		4,380	4	NEW LED WALL PACK 20 WATT	20		0			0

CUSTOMER: Barnegat Township School Dist: CUSTOMER: Barnegat Township School District GreenTech Energy Services
LOCATION: LOCATION: LIGHTING CONTROL

City, State, Zip Code: City, State, Zip Code: 0

Ō

	LOCATION:			EXIST	ING LIG	SHTING CONTROL		ı	PROPOSED LIGHTING CONTRO	LS		
Line Ref	Building	Location	EXISTING CONTROL	Existing Hrs. per Year	Lighting Qty	LIGHTING DESCRIPTION	WATT / Fixture	Control QTY	Control Description	Control Hours Reduced	New Hrs. (controlled)	KWH Saved from controls
283	Barnegat High School	#2 Courtyard Wall Packs		4,380	6	NEW LED WALL PACK 20 WATT	20	0	0			0
284	Barnegat High School	#2 Courtyard Wall Packs		4,380	2	NEW LED WALL PACK 20 WATT	20	0	0			0
285	Barnegat High School				0	0	0	0	0			0
286	Barnegat High School				0	0	0	0	0			0
	Total: Barnegat High School		Total: Barnegat High School		2,057			0			0	0

LOCATION:
City, State, Zip Code:

LOCATION:
City, State, Zip Code:

0

	LOCATION:			EXIST	ING LIG	HTING CONTROL		ı	PROPOSED LIGHTING CONTRO	LS		
Line Ref	Building	Location	EXISTING CONTROL	Existing Hrs. per Year	Lighting Qty	LIGHTING DESCRIPTION	WATT / Fixture	Control QTY	Control Description	Control Hours Reduced	New Hrs. (controlled)	KWH Saved from controls
1	Russell O Brackman Middle School	Main Entry		3,860	2	NEW LED CANOPY 21 WATT	21	0	0			0
2	Russell O Brackman Middle School	Main Entry		3,860	4	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
3	Russell O Brackman Middle School	Lobby Area		3,860	8	RETROFIT HIGH HAT 12 WATT LED 4 IN(12	0	0			0
4	Russell O Brackman Middle School	Lobby Area		3,860	1	NEW LED CANOPY 21 WATT	21	0	0			0
5	Russell O Brackman Middle School	Lobby Area - Salad Bowl		3,860	1	EXISTING DECORATIVE FIXTURES	0	0	0			0
6	Russell O Brackman Middle School	Display Cases		3,860	6	RETROFIT 3' 1L LED TUBE / SELF BALLA	10	0	0			0
7	Russell O Brackman Middle School	Main Office		2,500	4	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
8	Russell O Brackman Middle School	Main Office		2,500	8	RETROFIT HIGH HAT 12 WATT LED 4 IN(12	0	0			0
9	Russell O Brackman Middle School	Mail Room		2,500	3	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	1	WALL SENSOR	32%	1,700	76
10	Russell O Brackman Middle School	Mail Room		2,500	1	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
11	Russell O Brackman Middle School	Principals Office		2,500	3	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	1	WALL SENSOR	32%	1,700	76
12	Russell O Brackman Middle School	Hall/Pantry		2,500	1	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Russell O Brackman Middle School	Hall/Pantry		2,500	4	RETROFIT HIGH HAT 12 WATT LED 4 IN(0			0
14	Russell O Brackman Middle School	Bathroom		3,860	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
15	Russell O Brackman Middle School	Asst. Principal		2,500	4	RETROFIT 4' 3L LED TUBE / SELF BALLA		_	WALL SENSOR	32%	1,700	101
	Russell O Brackman Middle School	Asst. Principal		2,500	4	RETROFIT 4' 3L LED TUBE / SELF BALLA	32		WALL SENSOR	32%	1,700	101
	Russell O Brackman Middle School	Storage		800	2	RETROFIT 4' 2L LED TUBE / SELF BALLA			0	0270	1,700	0
	Russell O Brackman Middle School	File Room		2,500	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32		WALL SENSOR	32%	1,700	50
	Russell O Brackman Middle School	Office		2,500		RETROFIT 4' 3L LED TUBE / SELF BALLA			WALL SENSOR	32%	1,700	50
	Russell O Brackman Middle School	Conference Room		2,500		RETROFIT 4' 3L LED TUBE / SELF BALLA			WALL SENSOR	32%	1,700	101
	Russell O Brackman Middle School	Stair #1		3,860		RETROFIT 4 3L LED TUBE / SELF BALLA			0	32 /0	1,700	0
	Russell O Brackman Middle School	Stair #1 - New LED		0,000	0	0	0	0	0			0
23	Russell O Brackman Middle School	2ND FLOOR WEST			0	0	0		0			0
	Russell O Brackman Middle School			800	2	RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
24 25	Russell O Brackman Middle School	Storage Room Boys		3,860	4	RETROFIT 4 2L LED TUBE / SELF BALLA RETROFIT 4' 2L LED TUBE / SELF BALLA	21 21		U CEILING MOUNT SENSOR 1, SWITCH 1	32%	2,625	104
		•		- '	4				,	32 /0	2,025	
26	Russell O Brackman Middle School	Boys Closet		3,860	1	RETROFIT HIGH HAT 12 WATT LED 4 INC	12	0	0			0
27	Russell O Brackman Middle School			400	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21			000/	0.005	
	Russell O Brackman Middle School	Girls Room		3,860	4	RETROFIT 4' 2L LED TUBE / SELF BALLA			CEILING MOUNT SENSOR 1, SWITCH 1	32%	2,625	104
	Russell O Brackman Middle School	Girls Room		3,860	1	RETROFIT HIGH HAT 12 WATT LED 4 INC		Ŭ	·			0
30	Russell O Brackman Middle School	Class W201		1,500	18	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	Ü	0			0
31	Russell O Brackman Middle School	Prep Room		2,200	9	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	ŭ	0			0
32	Russell O Brackman Middle School	Storage		800	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Russell O Brackman Middle School	Class W203		1,500	21	RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
	Russell O Brackman Middle School	Class W200		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Russell O Brackman Middle School	Class W202		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Russell O Brackman Middle School	Class W204		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA		Ū	0			0
	Russell O Brackman Middle School	Class W205		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Russell O Brackman Middle School	Prep Room		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
	Russell O Brackman Middle School	Storage		800		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Russell O Brackman Middle School	Class W207		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Russell O Brackman Middle School	Class W206		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Russell O Brackman Middle School	Class W208		1,500	15	RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Russell O Brackman Middle School	Stairs 2		3,860	7	RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	Russell O Brackman Middle School	Electrical Room		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	Russell O Brackman Middle School	Class N209		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	Russell O Brackman Middle School	Hall Storage		800		RETROFIT 4' 2L LED TUBE / SELF BALLA		Ů	0			0
	Russell O Brackman Middle School	Class N210		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA			CORNER MOUNT SENSOR 1, SWITCH	32%	1,020	121
	Russell O Brackman Middle School	Girls Room		3,860	3	RETROFIT 4' 2L LED TUBE / SELF BALLA		1	CEILING MOUNT SENSOR 1, SWITCH 1	32%	2,625	78
	Russell O Brackman Middle School	Girls Room		3,860	2	RETROFIT 2' 2L LED TUBE / SELF BALLA		Ü	0			0
50	Russell O Brackman Middle School	Boys Room		3,860	3	RETROFIT 4' 2L LED TUBE / SELF BALLA		1	CEILING MOUNT SENSOR 1, SWITCH 1	32%	2,625	78
	Russell O Brackman Middle School	Boys Room		3,860	2	RETROFIT 2' 2L LED TUBE / SELF BALLA		0	0			0
52	Russell O Brackman Middle School	Storage/Elec.		800	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0

LOCATION:
City, State, Zip Code:
City, State, Zip Code:
0

	LOCATION:			EXIST	ING LIG	HTING CONTROL		ı	PROPOSED LIGHTING CONTROI	_S		
Line	5			Existing Hrs. per	Lighting Qty		WATT/	Control		Control Hours	New Hrs.	KWH Saved from
Ref	Building	Location	EXISTING CONTROL	Year		LIGHTING DESCRIPTION	Fixture	QTY	Control Description	Reduced	(controlled)	controls
53	Russell O Brackman Middle School	Class N212		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
54	Russell O Brackman Middle School	Class N211		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
55 50	Russell O Brackman Middle School	N314/N214		2,200	16	RETROFIT 4' 2L LED TUBE / SELF BALLA	21 21	0 1	OCCUPATE MOUNT SENSOR 4 CONTOUR	32%	1,496	0 177
56	Russell O Brackman Middle School	Class N213		2,200	12 12	RETROFIT 4' 2L LED TUBE / SELF BALLA		1	CORNER MOUNT SENSOR 1, SWITCH		,	
57 58	Russell O Brackman Middle School Russell O Brackman Middle School	Class N216 Class N215		2,200 2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA RETROFIT 4' 2L LED TUBE / SELF BALLA	21 21		CORNER MOUNT SENSOR 1, SWITCH CORNER MOUNT SENSOR 1, SWITCH	32% 32%	1,496 1,496	177 177
59	Russell O Brackman Middle School	Class N218		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
60	Russell O Brackman Middle School	Class N217		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
61	Russell O Brackman Middle School	Faculty Room N220		2,500	6	RETROFIT 4' 2L LED TUBE / SELF BALLA	21		CORNER MOUNT SENSOR 1, SWITCH	32%	1,700	101
62	Russell O Brackman Middle School	Faculty Room N220		2,500	1	RETROFIT 2' 2L LED TUBE / SELF BALLA	14	0	0		·	0
63	Russell O Brackman Middle School	Class 219		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
64	Russell O Brackman Middle School	Custodian Closet		400	3	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
65	Russell O Brackman Middle School	Class N221		2,200	18	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	266
66	Russell O Brackman Middle School	N221 Storage		800	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
67	Russell O Brackman Middle School	Class N222		2,200	20	RETROFIT 4' 2L LED TUBE / SELF BALLA	21		CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	296
68	Russell O Brackman Middle School	N222 Prep		2,200	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21		WALL SENSOR	32%	1,496	59
69	Russell O Brackman Middle School	Electrical Room		1,500	3	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
70 71	Russell O Brackman Middle School Russell O Brackman Middle School	Hall Storage Center Stairs		800 3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA RETROFIT 4' 2L LED TUBE / SELF BALLA	21 21	Ŭ	0			0
	Russell O Brackman Middle School				1	RETROFIT 4 2L LED TUBE / SELF BALLA	32	0	0			0
72 73	Russell O Brackman Middle School	Center Stairs Class S223		3,860 2,200	18	RETROFIT 4 3L LED TUBE / SELF BALLA RETROFIT 4' 2L LED TUBE / SELF BALLA	32 21	_	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	266
74	Russell O Brackman Middle School	S223 Kiln		800	10	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0	JZ /0	1,430	0
75	Russell O Brackman Middle School	Class S225		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21		CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
76	Russell O Brackman Middle School	Class S224		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	296
77	Russell O Brackman Middle School	S224 Prep		2,200	4	RETROFIT 4' 2L LED TUBE / SELF BALLA			WALL SENSOR	32%	1,496	59
78	Russell O Brackman Middle School	Class S227		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
79	Russell O Brackman Middle School	Class S226		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21		CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
80	Russell O Brackman Middle School	Class S229		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
81	Russell O Brackman Middle School	Class S228		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
82	Russell O Brackman Middle School	Class S231A		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		WALL SENSOR	32%	1,496	74
83	Russell O Brackman Middle School	HALLS - SOME 3RD LAMP		3,860	3	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
84	Russell O Brackman Middle School	Class 231B		2,200	8	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	118
85	Russell O Brackman Middle School Russell O Brackman Middle School	Class S230 Class S233		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496 1,496	177 177
86				2,200	12 12	RETROFIT 4' 2L LED TUBE / SELF BALLA RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	,	
	Russell O Brackman Middle School Russell O Brackman Middle School	Class S232 Electrical Room		2,200 1,500		RETROFIT 4" 2L LED TUBE / SELF BALLA RETROFIT 4" 2L LED TUBE / SELF BALLA	21 21	0	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177 0
	Russell O Brackman Middle School	Boys Room		3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA		_	CEILING MOUNT SENSOR 1, SWITCH 1	32%	2,625	78
90	Russell O Brackman Middle School	Boys Room		3,860	2	RETROFIT 2' 2L LED TUBE / SELF BALLA	14	0	0	O_ /0	2,020	0
91	Russell O Brackman Middle School	Girls Room		3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA			CEILING MOUNT SENSOR 1, SWITCH 1	32%	2,625	78
92	Russell O Brackman Middle School	Girls Room		3,860		RETROFIT 2' 2L LED TUBE / SELF BALLA		0	0		,	0
93	Russell O Brackman Middle School	Class S234		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
	Russell O Brackman Middle School	Hall Storage		800	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
95	Russell O Brackman Middle School	Class S235		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
96	Russell O Brackman Middle School	Hallways		3,860	48	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
97	Russell O Brackman Middle School	Hallways		3,860	16	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
98	Russell O Brackman Middle School	1ST FLOOR			U	0	0		0			0
99	Russell O Brackman Middle School	Main Hallways		3,860		RETROFIT 4' 3L LED TUBE / SELF BALLA	32		0			0
100	Russell O Brackman Middle School	Main Hallways		3,860	49	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
101	Russell O Brackman Middle School	Main Hallways		3,860		RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
102	Russell O Brackman Middle School	Library		2,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
103	Russell O Brackman Middle School	Library		2,500	5	RETROFIT 2' 2L LED TUBE / SELF BALLA			0			0
104	Russell O Brackman Middle School Russell O Brackman Middle School	Displays		2,500	2 6	RETROFIT 4' 2L LED TUBE / SELF BALLA RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0 WALL SENSOR	220/	1 700	0 101
105	Mussell O Diackindh Middle School	Library Work Room		2,500	Ö	NETROPH 4 ZE LED TUBE / SELF BALLA	21	1	WALL SENSUR	32%	1,700	IUI

LOCATION:
City, State, Zip Code:
City, State, Zip Code:
0

	LOCATION:			EXIST	ING LIG	HTING CONTROL			PROPOSED LIGHTING CONTROL	LS		
Line	Duilding	Location	EVICTING CONTROL	Hrs. per	Lighting Qty	LIGHTING DESCRIPTION	WATT /	Control	Control Depositation	Control Hours	New Hrs.	KWH Saved from
Ref	Building Russell O Brackman Middle School	Location Office	EXISTING CONTROL	Year	•	LIGHTING DESCRIPTION RETROFIT 4' 2L LED TUBE / SELF BALLA	Fixture	QTY	Control Description WALL SENSOR	Reduced 32%	(controlled) 1,700	controls
			_	2,500	3		21		0	32%	1,700	50
107 108	Russell O Brackman Middle School Russell O Brackman Middle School	Elevator Room Room C127		1,500 1,500	5	RETROFIT 4' 2L LED TUBE / SELF BALLA RETROFIT 4' 2L LED TUBE / SELF BALLA	21 21	U	WALL SENSOR	32%	1,020	0 50
100	Russell O Brackman Middle School	Guidance		2,500	3	RETROFIT 4' 2L LED TUBE / SELF BALLA			0	JZ /0	1,020	0
110	Russell O Brackman Middle School	Services		2,500	3	RETROFIT 4' 2L LED TUBE / SELF BALLA	21		WALL SENSOR	32%	1,700	50
	Russell O Brackman Middle School	Office #1		2,500	3	RETROFIT 4' 2L LED TUBE / SELF BALLA			0	0270	1,700	0
112	Russell O Brackman Middle School	Office #2		2,500	3	RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
113	Russell O Brackman Middle School	Office #3		2,500	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
114	Russell O Brackman Middle School	Nurse Suite		2,500	11	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
115	Russell O Brackman Middle School	Nurse Suite		2,500	6	RETROFIT 2' 2L LED TUBE / SELF BALLA	14	0	0			0
	Russell O Brackman Middle School	Class C123		2,200	16	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	473
	Russell O Brackman Middle School	Elevator		3,860	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
_	Russell O Brackman Middle School	Ladies Room		3,860	3	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	-	0			0
	Russell O Brackman Middle School	Ladies Room		3,860	1	RETROFIT 2' 2L LED TUBE / SELF BALLA	14	0	0			0
120	Russell O Brackman Middle School	Class E145		2,200	16	RETROFIT 4' 4L LED TUBE / SELF BALLA			CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	473
	Russell O Brackman Middle School	Boys Room		3,860	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0	2001	4.000	0
122	Russell O Brackman Middle School	Class E146		1,500	16	RETROFIT 4' 2L LED TUBE / SELF BALLA		1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,020	161
	Russell O Brackman Middle School Russell O Brackman Middle School	E146 Storage E146 Office		800 2,500	2	RETROFIT 4' 2L LED TUBE / SELF BALLA RETROFIT 4' 4L LED TUBE / SELF BALLA	21 42	Ů	0			0
	Russell O Brackman Middle School	E146 Office		2,500	1	RETROFIT 4 4L LED TOBE / SELF BALLA	21	0	0			0
	Russell O Brackman Middle School	E146 Office		2,500	1	RELAMP 9 WATT LED A LAMP S/I	9		0			0
	Russell O Brackman Middle School	Display		3,860	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	_	0			0
	Russell O Brackman Middle School	Music E147		1,500	14	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	-	0			0
	Russell O Brackman Middle School	E147 Storage		800	4	RETROFIT 4' 2L LED TUBE / SELF BALLA		_	0			0
130	Russell O Brackman Middle School	Sound Booth		800	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
131	Russell O Brackman Middle School	Room E148		1,500	6	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	1	WALL SENSOR	32%	1,020	91
132	Russell O Brackman Middle School	(2) Bathrooms		3,860	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0		,	0
133	Russell O Brackman Middle School	Class E148		2,200	8	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	1	WALL SENSOR	32%	1,496	177
134	Russell O Brackman Middle School	Class E149		2,200	8	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Russell O Brackman Middle School	Class E150		2,200	8	RETROFIT 4' 3L LED TUBE / SELF BALLA		Ü	0			0
136	Russell O Brackman Middle School	Class E151		2,200	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	1	WALL SENSOR	32%	1,496	44
137	Russell O Brackman Middle School	Class E152		2,200	5	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	1	WALL SENSOR	32%	1,496	111
138	Russell O Brackman Middle School	Facilities		2,500	22	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	Ŭ	0			0
139	Russell O Brackman Middle School	Electrical Room		1,500	2	RETROFIT 4' 2L LED TUBE / SELF BALLA		-	0			0
	Russell O Brackman Middle School Russell O Brackman Middle School	High Voltage		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA		0 0				0
	Russell O Brackman Middle School	Boiler Room Mens Room		1,500 3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA RETROFIT 4' 3L LED TUBE / SELF BALLA		0				0
	Russell O Brackman Middle School	Mens Room		3,860		RETROFIT 4 3L LED TUBE / SELF BALLA		0				0
	Russell O Brackman Middle School	Custodian Closet		400		RETROFIT 4 2L LED TUBE / SELF BALLA		0				0
	Russell O Brackman Middle School	Main Gym Entries		3,860	6	RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Russell O Brackman Middle School	Storage - New LED		2,220	0	0	0		0			0
	Russell O Brackman Middle School	Main Gym		3,000		RETROFIT 4' 4L T5 LED TUBE / SELF BAL	-		0			0
	Russell O Brackman Middle School	Main Gym		3,000		RETROFIT 4' 2L T5 LED TUBE / SELF BAL		0				0
149	Russell O Brackman Middle School	Boys Lockers		3,000	14	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Russell O Brackman Middle School	Closet		400	1_	RETROFIT 4' 2L LED TUBE / SELF BALLA		0				0
151	Russell O Brackman Middle School	Showers		3,000	3	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Russell O Brackman Middle School	Office		2,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Russell O Brackman Middle School	Office		2,500		RELAMP 9 WATT LED A LAMP S/I	9	_	0			0
	Russell O Brackman Middle School	Girls Lockers		3,000	14	RETROFIT 4' 2L LED TUBE / SELF BALLA		-	0			0
	Russell O Brackman Middle School	Closet		400	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	Ŭ	0			0
	Russell O Brackman Middle School	Shower		3,000	4	RETROFIT 4' 2L LED TUBE / SELF BALLA		_	0			0
	Russell O Brackman Middle School	Office		2,500	3	RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
158	Russell O Brackman Middle School	Office	1	2,500	2	RELAMP 9 WATT LED A LAMP S/I	9	0	0			0

LOCATION:
City, State, Zip Code:
City, State, Zip Code:
0

(

	LOCATION:			EXIST	TING LIG	HTING CONTROL		F	PROPOSED LIGHTING CONTRO	_S		
Line Ref	Building	Location	EXISTING CONTROL	Existing Hrs. per Year	Lighting Qty	LIGHTING DESCRIPTION	WATT / Fixture	Control QTY	Control Description	Control Hours Reduced	New Hrs. (controlled)	KWH Saved from controls
	- U	Storage Room		800	7	RETROFIT 4' 2L LED TUBE / SELF BALLA			0		(001111011000)	0
	Russell O Brackman Middle School	Loft		800	6	RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
161	Russell O Brackman Middle School	Band G154		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Russell O Brackman Middle School	Girls Room		3,860	2	RETROFIT 4' 2L LED TUBE / SELF BALLA			CEILING MOUNT SENSOR 1, SWITCH 1	32%	2,625	52
	Russell O Brackman Middle School	Girls Room		3,860	1	RETROFIT 4' 3L LED TUBE / SELF BALLA			0		_,===	0
164	Russell O Brackman Middle School	Weight Room		3,000	24	RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
165	Russell O Brackman Middle School	Weight Room		3,000		RETROFIT 2' 2L LED TUBE / SELF BALLA		0	0			0
166	Russell O Brackman Middle School	Side Room		800	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
167	Russell O Brackman Middle School	Display		3,860	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
168	Russell O Brackman Middle School	Kitchen		2,000	22	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
169	Russell O Brackman Middle School	Kitchen		2,000	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
170	Russell O Brackman Middle School	Stove Hoods		2,000	4	RELAMP 9 WATT LED A LAMP S/I	9	0	0			0
	Russell O Brackman Middle School	Office		2,500	2	RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	Russell O Brackman Middle School	Dry Storage		800	3	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Russell O Brackman Middle School	Coolers		800	4	RELAMP 9 WATT LED A LAMP S/I	9	0	0			0
_	Russell O Brackman Middle School	Bathroom		3,860	1	RETROFIT 4' 2L LED TUBE / SELF BALLA		Ü	0			0
	Russell O Brackman Middle School	Cafeteria		2,500		RETROFIT 4' 2L LED TUBE / SELF BALLA		Ŭ	0			0
	Russell O Brackman Middle School	Gym #2 - New LED			0	0	0	0	0			0
	Russell O Brackman Middle School	Closet		400	1	RETROFIT 4' 2L LED TUBE / SELF BALLA		Ü	0			0
	Russell O Brackman Middle School	Gym Storage		800	3	RETROFIT 4' 2L LED TUBE / SELF BALLA		Ŭ	0			0
	Russell O Brackman Middle School	Mechanical Room		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA		Ü	0			0
	Russell O Brackman Middle School	M132		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA			WALL SENSOR	32%	1,496	59 50
	Russell O Brackman Middle School	M131		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA			WALL SENSOR	32%	1,496	59
	Russell O Brackman Middle School	Boys Room		3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA			CEILING MOUNT SENSOR 1, SWITCH 1	32%	2,625	78
183 184	Russell O Brackman Middle School Russell O Brackman Middle School	Boys Room Room 130/129		3,860 2,200	0	RETROFIT 2' 2L LED TUBE / SELF BALLA RETROFIT 4' 2L LED TUBE / SELF BALLA		Ü	0			0
					0				·	000/	0.005	
185	Russell O Brackman Middle School Russell O Brackman Middle School	Girls Room Girls Room		3,860 3,860	3	RETROFIT 4' 2L LED TUBE / SELF BALLA RETROFIT 2' 2L LED TUBE / SELF BALLA	21 14		CEILING MOUNT SENSOR 1, SWITCH 1	32%	2,625	78 0
	Russell O Brackman Middle School	Room M128		2,200	2	RETROFIT 2 2L LED TUBE / SELF BALLA			0			0
	Russell O Brackman Middle School	Closet		400		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Russell O Brackman Middle School	Electrical Room		1,500	2	RETROFIT 4 2L LED TUBE / SELF BALLA		0	0			0
190	Russell O Brackman Middle School	Class S134		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA			CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
191	Russell O Brackman Middle School	Class S135		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
	Russell O Brackman Middle School	Class S136		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA		1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
		Class S137		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA			CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	325
	Russell O Brackman Middle School	Class S138		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA			CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
	Russell O Brackman Middle School	Class S140		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA			CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
196	Russell O Brackman Middle School	Mechanical Room		1,500	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
197	Russell O Brackman Middle School	Faculty S142		2,500	3	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
198	Russell O Brackman Middle School	Faculty S142		2,500		RETROFIT 2' 2L LED TUBE / SELF BALLA		0	0			0
199	Russell O Brackman Middle School	Stairs		3,860	6	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
200	Russell O Brackman Middle School	Stairs		3,860		RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
	Russell O Brackman Middle School	Room S141		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA			WALL SENSOR	32%	1,496	89
202	Russell O Brackman Middle School	Room S143		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
	Russell O Brackman Middle School	Room S144		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
	Russell O Brackman Middle School	NORTH WING			0	0	0		0			0
	Russell O Brackman Middle School	Closet		400		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Russell O Brackman Middle School	Electrical Room		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	Russell O Brackman Middle School	Class N121		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA			CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
	Russell O Brackman Middle School	Class N122		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA			CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
	Russell O Brackman Middle School	Class N119		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA			CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
	Russell O Brackman Middle School	Class N120		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA			CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
211	Russell O Brackman Middle School	Class N117		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177

LOCATION: LOCATION:
City, State, Zip Code: City, State, Zip Code: 0

Ō

	LOCATION:			EXIS	TING LIG	SHTING CONTROL			PROPOSED LIGHTING CONTRO	LS		
Line Ref	Building	Location	EXISTING CONTROL	Existing Hrs. per Year	Lighting Qty	LIGHTING DESCRIPTION	WATT / Fixture	Control QTY	Control Description	Control Hours Reduced	New Hrs. (controlled)	KWH Saved from controls
212	Russell O Brackman Middle School	Class N118		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
213	Russell O Brackman Middle School	Class N115		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
214	Russell O Brackman Middle School	Electrical Room		1,500	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
215	Russell O Brackman Middle School	Class N113		2,200	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
216	Russell O Brackman Middle School	Class N114		2,200	6	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	WALL SENSOR	32%	1,496	89
217	Russell O Brackman Middle School	Class N112		2,200	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	177
218	Russell O Brackman Middle School	Stairs		3,860	6	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
219	Russell O Brackman Middle School	Stairs		3,860	1	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
220	Russell O Brackman Middle School	Boys Room		3,860	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CEILING MOUNT SENSOR 1, SWITCH 1	32%	2,625	104
221	Russell O Brackman Middle School	Boys Room		3,860	1	RETROFIT HIGH HAT 12 WATT LED 4 INC	12	0	0			0
222		Closet		400		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
223		Girls Room		3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CEILING MOUNT SENSOR 1, SWITCH 1	32%	2,625	104
224	Russell O Brackman Middle School	Girls Room		3,860	1	RETROFIT HIGH HAT 12 WATT LED 4 INC	12	0	0			0
225	Russell O Brackman Middle School	Class W101		1,500	18	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
226	Russell O Brackman Middle School	Prep Room		2,200	6	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
227	Russell O Brackman Middle School	Storage		800	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
228		Class W103		1,500	21	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
229		Book Storage		800	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
230	Russell O Brackman Middle School	Server Room		800	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
231	Russell O Brackman Middle School	Class W102		1,500	15	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
232	Russell O Brackman Middle School	Class W104		1,500	15	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
233	Russell O Brackman Middle School	Class W105		1,500	21	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
234		Prep Room		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
235		Storage		800	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
236	Russell O Brackman Middle School	Class W107		1,500	18	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
237	Russell O Brackman Middle School	Class W106		1,500	15	RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
238	Russell O Brackman Middle School	Class W108		1,500	15	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
239	Russell O Brackman Middle School	Class W109		1,500	15	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
240	Russell O Brackman Middle School	Class W110		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
241		Electrical Room		1,500	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
242	Russell O Brackman Middle School	Courtyard		4,380	2	NEW LED SHOEBOX LOT 100 WATT ARN	100	0	0			0
243	Russell O Brackman Middle School	Courtyard		4,380	2	NEW LED WALL PACK 20 WATT	20		0			0
244	Russell O Brackman Middle School	N111 Room		2,200	6	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
245	Russell O Brackman Middle School	Auditorium Electrical Room		1,500	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Russell O Brackman Middle School	Side Room		800		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
247		Possible Emergency Ballast		3,860		0	0	0	0			0
248		EXTERIOR		5,550		0	0		0			0
		Shoe Box Pole Lights		4,380		NEW LED SHOEBOX LOT 100 WATT ARN	100		0			0
250		Wall Mount Shoe Box Fixtures		4,380		NEW LED SHOEBOX LOT 100 WATT ARN	100	0	0			0
251		Front Canopy		4,380		RETROFIT HIGH HAT 12 WATT LED 4 INC	12	0	0			0
		Surf Mount Box Fixture		4,380		NEW LED CANOPY 21 WATT	21	0	0			0
253	Russell O Brackman Middle School	Half Dome Wall Packs		4,380		NEW LED WALL PACK 20 WATT	20	0	0			0
	Russell O Brackman Middle School	Full Face Wall Packs		4,380		NEW LED WALL PACK 20 WATT	20	0	0			0
2.	Total: Russell O Brackman Middle School		Total: Russell O Brackman Middle		1,872		-	78			127,949	11,402

City, State, Zip Code:
City, State, Zip Code:
0

	LOCATION:			EXIST	ING LIG	HTING CONTROL			PROPOSED LIGHTING CONTRO	LS		
Una					Lighting		\A/ATT /	041		Control	Navellas	KWH Save
Line Ref	Building	Location	EXISTING CONTROL	Hrs. per Year	Qty	LIGHTING DESCRIPTION	WATT / Fixture	Control QTY	Control Description	Hours Reduced	New Hrs. (controlled)	from controls
	Robert L Horbelt School	Main Entry		3,860	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	·		(0
2	Robert L Horbelt School	Main Lobby		3,860	16	RETROFIT HIGH HAT 12 WATT LED 8 INC	12	0	0			0
	Robert L Horbelt School	Main Lobby		3,860	14	RETROFIT HIGH HAT 12 WATT LED 8 INC			0			0
	Robert L Horbelt School	Class 500		1,500	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1. SWITCH	32%	1,020	121
	Robert L Horbelt School	Stage		2,500	12	RETROFIT 4' 4L LED TUBE / SELF BALLA		0	0		1,020	0
6	Robert L Horbelt School	Stage Storage		800	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
7	Robert L Horbelt School	Boys Room		2,000	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
8	Robert L Horbelt School	Girls Room		2,000	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
9	Robert L Horbelt School	Hall Storage		800	3	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
10	Robert L Horbelt School	Main Gym		3,000	24	RETROFIT 4' 3L T5 LED TUBE / SELF BAL	75	0	0			0
11	Robert L Horbelt School	Gym Office		2,500	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
12	Robert L Horbelt School	Storage Room		800	3	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
13	Robert L Horbelt School	Storage Room		800	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Robert L Horbelt School	Music Room		2,200	3	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Robert L Horbelt School	Music Room		2,200	6	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Robert L Horbelt School	Music Office		2,500	1	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Robert L Horbelt School	Gym Lobby		3,860	15	RETROFIT HIGH HAT 12 WATT LED 8 IN(0	0			0
	Robert L Horbelt School	Gym Lobby		3,860	11	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
19	Robert L Horbelt School	Side Entry		3,860	2	RETROFIT 4' 2L LED TUBE / SELF BALLA		_	0			0
20	Robert L Horbelt School	Cafeteria		2,500	7	RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School Robert L Horbelt School	Cafeteria		2,500	36 6	RETROFIT 4' 4L LED TUBE / SELF BALLA RETROFIT 4' 4L LED TUBE / SELF BALLA	42	0	0			0
22 23	Robert L Horbelt School	Serving Custodian Closet		2,000 400	1	RETROFIT 4' 4L LED TUBE / SELF BALLA RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	Robert L Horbelt School	Kitchen Bathroom		3,860	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Robert L Horbelt School	Kitchen Area		2,000	10	RETROFIT 4 2L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Kitchen Area		2,000	3	RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Kitchen Office		2,500	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Robert L Horbelt School	Custodian Office		2,500	5	RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
29	Robert L Horbelt School	Mechanical Room		1,500	11	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
30	Robert L Horbelt School	Coolers		800	4	RELAMP 9 WATT LED A LAMP S/I	9	0	0			0
31	Robert L Horbelt School	Dry Storage		800	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
32	Robert L Horbelt School	Stove Hood		2,000	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
33	Robert L Horbelt School	Cafeteria Storage		800	5	RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	Robert L Horbelt School	Main Office		1,800	11	RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Bathroom		3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Conference Room		1,800	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	_	, ,	0			0
	Robert L Horbelt School	Copier Room		1,800		RETROFIT 4' 3L LED TUBE / SELF BALLA	_	0				0
	Robert L Horbelt School	Office #1		1,800	2	RETROFIT 4' 3L LED TUBE / SELF BALLA RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School Robert L Horbelt School	Office #2 Storage		1,800 800	1	RETROFIT 4' 3L LED TUBE / SELF BALLA RETROFIT 4' 2L LED TUBE / SELF BALLA	_	0	0			0
	Robert L Horbelt School	Nurse Suite		1,800	8	RETROFIT 4 2L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Nurse Suite		1,800	4	RETROFIT 2' 2L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Bathroom		3,860	1	RETROFIT 2 2L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	(2) Bathroom		3,860	2	RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Mechanical Room		1,500	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Robert L Horbelt School	Lobby Area		3,860	14	RETROFIT HIGH HAT 12 WATT LED 6 IN(0			0
47	Robert L Horbelt School	Faculty Room		1,800	6	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
48	Robert L Horbelt School	Faculty Room		1,800	5	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
	Robert L Horbelt School	Elevator		3,860	2	RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Class 500A		1,500	5	RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Electrical Closet		1,500	3	RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	Robert L Horbelt School	Hallway		3,860	4	RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
53	Robert L Horbelt School	Hallway		3,860	1	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0

CUSTOMER:

LOCATION:

LOCATION:
City, State, Zip Code:
City, State, Zip Code:
0

(

	LOCATION:			EXIST	ING LIG	HTING CONTROL		F	PROPOSED LIGHTING CONTRO	_S		
Line Ref	Building	Location	EXISTING CONTROL	Existing Hrs. per Year	Lighting Qty	LIGHTING DESCRIPTION	WATT / Fixture	Control QTY	Control Description	Control Hours Reduced	New Hrs. (controlled)	KWH Saved from controls
	Robert L Horbelt School	Girls Room	EXISTING CONTROL	2,000	5	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	Control Description	Reduced	(controlled)	0
	Robert L Horbelt School	Boys Room		2,000		RETROFIT 4 2L LED TUBE / SELF BALLA	21	0	0			0
	Robert L Horbelt School	Custodian Closet		400		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Robert L Horbelt School	Class 500B		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Robert L Horbelt School	Hall Cove		3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
59	Robert L Horbelt School	Class 501		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
60	Robert L Horbelt School	Class 501		1,500	3	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
	Robert L Horbelt School	Class 502		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
62	Robert L Horbelt School	Class 502		1,500	7	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
	Robert L Horbelt School	Bathroom		2,000	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Robert L Horbelt School	Class 504		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA	32	ŭ	0			0
	Robert L Horbelt School	Class 504		1,500		RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
	Robert L Horbelt School	Class 504		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Robert L Horbelt School Robert L Horbelt School	Class 503 Class 503		1,500 1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA RETROFIT HIGH HAT 12 WATT LED 6 IN(32 12	, ,	0			0
				1,500					0			
	Robert L Horbelt School Robert L Horbelt School	503 Storage 503 Storage		800 800	2	RETROFIT 4' 3L LED TUBE / SELF BALLA RETROFIT 4' 2L LED TUBE / SELF BALLA	32 21	0	0 0			0
	Robert L Horbelt School	Hallway		3,860		RETROFIT 4 2L LED TUBE / SELF BALLA	21		0			0
	Robert L Horbelt School	Class 505A		2,200		RETROFIT 4' 3L LED TUBE / SELF BALLA	32	Ü	WALL SENSOR	32%	1,496	67
	Robert L Horbelt School	Hall Cove		3,860		RETROFIT 4 3L LED TUBE / SELF BALLA	21		0	32 /0	1,490	0
	Robert L Horbelt School	Class 505A		1,500	24	RETROFIT 4' 3L LED TUBE / SELF BALLA	32		0			0
	Robert L Horbelt School	Class 505A		1,500		RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
	Robert L Horbelt School	Class 506		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA	32		0			0
77	Robert L Horbelt School	Class 506		1,500	7	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
78	Robert L Horbelt School	Class 506		1,500	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
79	Robert L Horbelt School	Class 508		1,500	13	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
80	Robert L Horbelt School	Class 508		1,500	7	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
	Robert L Horbelt School	Class 508		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Robert L Horbelt School	Class 507		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA	32		0			0
	Robert L Horbelt School	Class 507		1,500		RETROFIT HIGH HAT 12 WATT LED 6 IN(12	ŭ	0			0
	Robert L Horbelt School	Hallway		3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Robert L Horbelt School	Hallway		3,860	8	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	ŭ	0			0
	Robert L Horbelt School	Class 509/509B		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	Ü	0			0
	Robert L Harbelt School	Class 510/510B		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	CORNER MOUNT SENSOR 4 SWITCH	220/	1.020	0
	Robert L Horbelt School Robert L Horbelt School	Class 512 512 Bathroom		1,500 2,000		RETROFIT 4' 2L LED TUBE / SELF BALLA RETROFIT 4' 2L LED TUBE / SELF BALLA	21 21	0	CORNER MOUNT SENSOR 1, SWITCH	32%	1,020	131 0
	Robert L Horbelt School	Class 511		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	-	CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	222
	Robert L Horbelt School	Hallway	+	3,860		RETROFIT 4 2L LED TUBE / SELF BALLA		0	0	JZ /0	1,+30	0
	Robert L Horbelt School	Class 513		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	222
	Robert L Horbelt School	Class 514		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Robert L Horbelt School	Class 514		1,500		NEW 2X2 LED FLAT PANEL FIXTURE 40	40		0			0
95	Robert L Horbelt School	514 Bathroom		2,000	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
96	Robert L Horbelt School	Hallway		3,860	3	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Robert L Horbelt School	Hallway		3,860		RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
98	Robert L Horbelt School	Ladies Room		2,000	3	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Robert L Horbelt School	Electrical Room		1,500	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
	Robert L Horbelt School	Electrical Room		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
	Robert L Horbelt School	Boys Room		2,000		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	ŭ	0			0
	Robert L Horbelt School	Class 515		2,200		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		CORNER MOUNT SENSOR 1, SWITCH	32%	1,496	222
	Robert L Harbelt School	Class 516	+	1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	Robert L Horbelt School	Stairwell	+	3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
	Robert L Horbelt School	Stairwell		3,860	0	U	0	0	0			0

LOCATION:
City, State, Zip Code:
City, State, Zip Code:

0

	LOCATION:			EXIST	ING LIC	HTING CONTROL		PROPOSED LIGHTING CONTROLS				
Line				Existing Hrs. per	Lighting Qty		WATT /	Control		Control Hours	New Hrs.	KWH Saved
Ref	Building	Location	EXISTING CONTROL	Year		LIGHTING DESCRIPTION	Fixture	QTY	Control Description	Reduced	(controlled)	controls
107	Robert L Horbelt School	Class 616		1,500	9	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
108	Robert L Horbelt School	Class 617		1,500	15	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
	Robert L Horbelt School	Mens Room		2,000	3	RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Hallway		3,860	24	RETROFIT 4' 2L LED TUBE / SELF BALLA		ŭ	0			0
	Robert L Horbelt School	Hallway		3,860		RETROFIT HIGH HAT 12 WATT LED 6 INC		Ü	0			0
	Robert L Horbelt School	Hall Storage		800		RETROFIT 4' 2L LED TUBE / SELF BALLA		Ü	0			0
	Robert L Horbelt School	Ladies Room		2,000	3	RETROFIT 4' 2L LED TUBE / SELF BALLA		Ü	U			0
	Robert L Horbelt School	Class 614		1,500	15	RETROFIT 4' 2L LED TUBE / SELF BALLA RETROFIT 4' 2L LED TUBE / SELF BALLA		Ü	0			0
	Robert L Horbelt School Robert L Horbelt School	Class 615 Class 612		1,500 1,500	15 15	RETROFIT 4 2L LED TUBE / SELF BALLA		0	0			0
	Robert L Horbelt School	Class 613		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Stair #3		3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Stair #3		3,860	2	RETROFIT HIGH HAT 12 WATT LED 6 INC			0			0
	Robert L Horbelt School	Stair #2		3,860	_ 7	RETROFIT 4' 2L LED TUBE / SELF BALLA		0	n			0
	Robert L Horbelt School	Stair #2		3,860	2	RETROFIT 4 2E LED TOBE / SELF BALLA			0			0
	Robert L Horbelt School	Class 611		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Class 611		1,500	3	RETROFIT HIGH HAT 12 WATT LED 6 INC		0	0			0
	Robert L Horbelt School	Class 610		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Class 610		1,500	3	RETROFIT HIGH HAT 12 WATT LED 6 INC			0			0
	Robert L Horbelt School	Hall Cove		3,860	8	RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	Robert L Horbelt School	Class 608		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Class 608		1,500	3	RETROFIT HIGH HAT 12 WATT LED 6 INC			0			0
129	Robert L Horbelt School	Class 609		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Robert L Horbelt School	Class 609		1,500		RETROFIT HIGH HAT 12 WATT LED 6 INC		_	0			0
131	Robert L Horbelt School	Class 607		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
132	Robert L Horbelt School	Class 607		1,500	3	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
133	Robert L Horbelt School	Class 606		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
134	Robert L Horbelt School	Class 606		1,500	3	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
135	Robert L Horbelt School	Hall Cove		3,860	6	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
136	Robert L Horbelt School	Class 604		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
137	Robert L Horbelt School	Class 604		1,500	3	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
138	Robert L Horbelt School	Class 605		1,500	12	RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
139	Robert L Horbelt School	Class 605		1,500	3	RETROFIT HIGH HAT 12 WATT LED 6 INC		0	0			0
140	Robert L Horbelt School	Class 603		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA		, ,	0			0
	Robert L Horbelt School	Class 603		1,500		RETROFIT HIGH HAT 12 WATT LED 6 INC		0	0			0
	Robert L Horbelt School	Class 602		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Class 602		1,500	3	RETROFIT HIGH HAT 12 WATT LED 6 INC		0				0
	Robert L Horbelt School	Boys Room		2,000		RETROFIT 4' 2L LED TUBE / SELF BALLA		0				0
	Robert L Horbelt School	Ladies Room		2,000		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Class 601B/601		1,500		RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Custodian Closet		400		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Electrical Room		1,500	3	RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	(2) Faculty Bathrooms		2,000	2	RETROFIT 4' 2L LED TUBE / SELF BALLA		ŭ		000/	4 400	-
	Robert L Horbelt School	Class 600A		2,200	9	RETROFIT 4' 3L LED TUBE / SELF BALLA		_	CORNER MOUNT SENSOR 1, SWITCH 0	32%	1,496	200 0
	Robert L Horbelt School Robert L Horbelt School	600A Storage Class 600		800 1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Class 600		1,500		RETROFIT 4 3L LED TOBE / SELF BALLA RETROFIT HIGH HAT 12 WATT LED 6 INC		-	0 0			0
	Robert L Horbelt School	Mechanical Room		1,500	8	RETROFIT HIGH HAT 12 WATT LED 6 INC			0			0
	Robert L Horbelt School	Library		2,500	o 28	RETROFIT 4' 4L LED TUBE / SELF BALLA		_	0			0
	Robert L Horbelt School	Library		2,500	20	RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Library		2,500	2	RETROFIT 4 2L LED TUBE / SELF BALLA			0			0
	Robert L Horbelt School	Work Room		1,800	6	RETROFIT 4' 3L LED TUBE / SELF BALLA		_	0			0
158												

CUSTOMER: Barnegat Township School Dist: CUSTOMER: Barnegat Township School District GreenTech Energy Services
LOCATION: LOCATION: School District GreenTech Energy Services
LIGHTING CONTROL

City, State, Zip Code:

City, State, Zip Code:

0

Ö

	LOCATION:		EXISTING LIGHTING CONTROL						PROPOSED LIGHTING CONTRO			
Line Ref	Building	Location	EXISTING CONTROL	Existing Hrs. per Year	Lighting Qty	LIGHTING DESCRIPTION	WATT / Fixture	Control QTY	Control Description	Control Hours Reduced	New Hrs. (controlled)	KWH Saved from controls
160	Robert L Horbelt School	Storage Room		800	1	RETROFIT HIGH HAT 12 WATT LED 6 IN(12	0	0			0
161	Robert L Horbelt School	Stair #1		3,860	7	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
162	Robert L Horbelt School	Stair #1		3,860	2	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
163	Robert L Horbelt School	Possible Emergency Ballast			0	0	0	0	0			0
164	Robert L Horbelt School	EXTERIOR			0	0	0	0	0			0
165	Robert L Horbelt School	Main Canopy		4,380	4	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
166	Robert L Horbelt School	Main Canopy - Induction		4,380	5	NEW LED CANOPY 21 WATT	21	0	0			0
167	Robert L Horbelt School	Full Face Wall Packs - New LE			0	0	0	0	0			0
168	Robert L Horbelt School	Bell Top Pole Lights		4,380	17	RELAMP CORN STYLE 30W LED E26	20	0	0			0
169	Robert L Horbelt School	Bell Top Wall Mount Fixtures		4,380	7	NEW LED WALL PACK 20 WATT	20	0	0			0
170	Robert L Horbelt School	Cutoff Wall Packs		4,380	1	NEW LED WALL PACK 20 WATT	20	0	0			0
171	Robert L Horbelt School	Recessed Cans		4,380	2	RETROFIT HIGH HAT 12 WATT LED 6 INC	12	0	0			0
	Total: Robert L Horbelt School		Total: Robert L Horbelt School		1,127			7			9,520	1,183

City, State, Zip Code: City, State, Zip Code:

	LOCATION:			EXIST	TING LIG	HTING CONTROL		F	PROPOSED LIGHTING CONTRO	LS		
Line Ref	Building	Location	EXISTING CONTROL	Existing Hrs. per Year		LIGHTING DESCRIPTION	WATT / Fixture	Control QTY	Control Description	Control Hours Reduced	New Hrs. (controlled)	KWH Saved from controls
1	Joseph T Donahue Elementary School	2ND FLOOR			0	0	0	0	0			0
2	Joseph T Donahue Elementary School	Mechanical Room		1,500	14	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
3	Joseph T Donahue Elementary School	Faculty Room		2,500	9	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	CORNER MOUNT SENSOR 1, SWITCH	32%	1,700	151
4	Joseph T Donahue Elementary School	(2) Bathrooms		3,860	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
5	Joseph T Donahue Elementary School	2nd Floor Hallways		3,860	18	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
6	Joseph T Donahue Elementary School	Display		3,860		RETROFIT 3' 1L LED TUBE / SELF BALLA	10	0	0			0
7	Joseph T Donahue Elementary School	Class 207		1,500	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
8		Class 206		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
9	Joseph T Donahue Elementary School	Class 205		1,500	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
10	Joseph T Donahue Elementary School	Class 204		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
11	Joseph T Donahue Elementary School	Class 203		1,500	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
12	Joseph T Donahue Elementary School	Class 202		1,500	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
13	Joseph T Donahue Elementary School	Class 201		1,500	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
14	Joseph T Donahue Elementary School	Class 200		1,500	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
15	Joseph T Donahue Elementary School	SGI 208		1,500	8	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
16	Joseph T Donahue Elementary School	Custodian		400	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
17		Mens Room		2,000		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
18	Joseph T Donahue Elementary School	Ladies Room		2,000		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
		Stairs #1		3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
20		Stairs #2		3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
		Elevator Room		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
22		Elevator		3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
		1ST FLOOR		3,000	0	0	0		0			0
24		Hallway		3,860	-	RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
		Display		3,860		RETROFIT 3' 1L LED TUBE / SELF BALLA			0			0
26		Class 107		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
		Class 106		1,500		RETROFIT 4 2L LED TUBE / SELF BALLA	21		0			0
28		Class 105		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
		Class 104		1,500		RETROFIT 4 2L LED TUBE / SELF BALLA	21		0			0
		Class 104				RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
30 31		Class 103 Class 102		1,500 1,500	12	RETROFIT 4 2L LED TUBE / SELF BALLA	21		0			0
					12				0			
32 33	,	Class 101 Class 100		1,500 1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA RETROFIT 4' 2L LED TUBE / SELF BALLA	21 21	0	0			0
					-				-	000/	4.000	
	Joseph T Donahue Elementary School			1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA			WALL SENSOR	32%	1,020	81 0
	Joseph T Donahue Elementary School			2,000		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			-
	Joseph T Donahue Elementary School			2,000		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
	. ,	Custodian Closet		400		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	1	Large Lobby		3,860		NEW 2X2 LED FLAT PANEL FIXTURE 40	40		0			0
	Joseph T Donahue Elementary School			3,860		RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
40	1	Mail Room		1,800		RETROFIT 4' 3L LED TUBE / SELF BALLA	32		0			0
41	·	Side Door		3,860		RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
42		Electrical Room		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	·	Mens Room		2,000		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
44		Custodian		400		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	,	Girls Room		2,000		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
		Supply Room		800		RETROFIT 4' 3L LED TUBE / SELF BALLA	32		0			0
47	Joseph T Donahue Elementary School			1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
48	Joseph T Donahue Elementary School			1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21		0			0
49	Joseph T Donahue Elementary School	Main Gym		3,000	15	RETROFIT 4' 6L T5 LED TUBE / SELF BAL	150	0	0			0
50	,	Main Gym		3,000		NEW LED FLOOD 14 WATT	14	0	0			0
51	Joseph T Donahue Elementary School	Gym Storage		800	8	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0

CUSTOMER:

LOCATION:

LOCATION:
City, State, Zip Code:
City, State, Zip Code:

0

	LOCATION:			EXIST	ING LIG	HTING CONTROL	F	PROPOSED LIGHTING CONTRO	LS			
Line Ref	Building	Location	EXISTING CONTROL	Existing Hrs. per Year	Lighting Qty	LIGHTING DESCRIPTION	WATT / Fixture	Control QTY	Control Description	Control Hours Reduced	New Hrs. (controlled)	KWH Saved from controls
52	Joseph T Donahue Elementary School	Stage - 81 Sports Light		2,500	13	NEW LED HIGH BAY 150 WATT	150		0			0
	Joseph T Donahue Elementary School			800		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
	·	Stage Storage		800		RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
		Music 134A		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA			0			0
		134A Storage		800		RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
		Gym Office		1,800		RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
		Gym Office		1,800		RETROFIT 2' 2L LED TUBE / SELF BALLA	14	0	0			0
		Bathroom		2,000		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
60	Joseph T Donahue Elementary School	Bathroom		2,000	1	RELAMP 9 WATT LED A LAMP S/I	9	0	0			0
		Library		2,500		NEW 2X2 LED FLAT PANEL FIXTURE 40 \	40	0	0			0
62	Joseph T Donahue Elementary School	Library		2,500	6	COMPACT FLUORESCENT 13W HW	13	0	0			0
		Library		2,500		RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
64	Joseph T Donahue Elementary School	Library Office		1,800	4	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
65		Book Storage		800	4	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
66	Joseph T Donahue Elementary School	Supply Room		800	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
67	Joseph T Donahue Elementary School	Library Cove Large - Salad Bo		2,500	1	0	0	0	0			0
68	Joseph T Donahue Elementary School	Lobby Display		3,860	1	RETROFIT 3' 1L LED TUBE / SELF BALLA	10	0	0			0
69	Joseph T Donahue Elementary School	Lobby Center		3,860	4	NEW LED FLOOD 14 WATT	14	0	0			0
70	Joseph T Donahue Elementary School	Cafeteria - 8L Sports Light		2,500		NEW LED HIGH BAY 150 WATT	150	0	0			0
71	Joseph T Donahue Elementary School	Receiving		2,000	10	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
		Food Serving		2,000	8	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	·	Faculty Dining		1,800		RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
	,	Kitchen		2,000		RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
75	Joseph T Donahue Elementary School	Coolers		800	4	RELAMP 9 WATT LED A LAMP S/I	9	0	0			0
		Storage Room		800		RETROFIT 4' 2L LED TUBE / SELF BALLA		Ü	0			0
	·	Ladies Room		2,000		RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
	,	Kitchen Office		1,800		RETROFIT 4' 3L LED TUBE / SELF BALLA		0	0			0
		Closet		400		RETROFIT 4' 2L LED TUBE / SELF BALLA		ŭ	0			0
	1	Stove Hoods		2,000		RETROFIT 4' 2L LED TUBE / SELF BALLA		0	0			0
		Main Office		2,500		RETROFIT 4' 2L LED TUBE / SELF BALLA		ŭ	0			0
	,	Work Room		2,500		RETROFIT 4' 3L LED TUBE / SELF BALLA		Ü	0			0
	,	Files Room		800		RETROFIT 4' 3L LED TUBE / SELF BALLA		ŭ	0			0
	Joseph T Donahue Elementary School			2,500		RETROFIT 4' 2L LED TUBE / SELF BALLA		v	0			0
	Joseph T Donahue Elementary School			2,500		RETROFIT HIGH HAT 12 WATT LED 8 INC		0				0
	1 2	Guidance		1,800		RETROFIT 4' 3L LED TUBE / SELF BALLA		-	0			0
	,	Guidance		1,800		NEW 2X2 LED FLAT PANEL FIXTURE 40 \			0			0
	,	Principal		1,800		RETROFIT 4' 3L LED TUBE / SELF BALLA		-	0			0
	Joseph T Donahue Elementary School			1,800		RETROFIT 4'3L LED TUBE / SELF BALLA		-	0			0
	,	Bathroom		3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA RETROFIT 4' 3L LED TUBE / SELF BALLA		Ü	0 WALL SENSOR	32%	1 400	0 67
		Speech Room		2,200						<i>32%</i>	1,496	
	,	Nurse Suite		1,800		RETROFIT 4' 4L LED TUBE / SELF BALLA RETROFIT 4' 3L LED TUBE / SELF BALLA			0			0
		Nurse Suite		1,800	_				0			
		Electrical Room Data Room		1,500		RETROFIT 4' 2L LED TUBE / SELF BALLA RETROFIT 4' 2L LED TUBE / SELF BALLA		-	0			0
				1,500					0			
		Hallway Display		3,860 3,860		RETROFIT 4' 2L LED TUBE / SELF BALLA RETROFIT 3' 1L LED TUBE / SELF BALLA		-	0			0
		Class J		1,500		RETROFIT 3 IL LED TUBE / SELF BALLA			0			0
		Class A		1,500		RETROFIT 4 2L LED TUBE / SELF BALLA			0			0
		Class B		1,500		RETROFIT 4 2L LED TUBE / SELF BALLA			0			0
	·	Class C		1,500		RETROFIT 4 2L LED TUBE / SELF BALLA			0			0
101	Cocopii i Donanao Elementary Conton	0,000 0		1,000	17	NETROTTI + ZE EED TODE / OEEF DALLA	-1	J	~			J

LOCATION: City, State, Zip Code: City, State, Zip Code:

0

	LOCATION:		EXISTI			SHTING CONTROL		F	PROPOSED LIGHTING CONTRO	LS		
Line Ref	Building	Location	EXISTING CONTROL	Existing Hrs. per Year	Lighting Qty	LIGHTING DESCRIPTION	WATT / Fixture	Control QTY	Control Description	Control Hours Reduced	New Hrs. (controlled)	KWH Saved from controls
103	Joseph T Donahue Elementary School	Class D		1,500	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
		Class D		1,500	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
		Class E		1,500	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
106	Joseph T Donahue Elementary School	Class E Bathroom		2,000	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
107	Joseph T Donahue Elementary School	Class F		1,500	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
108	Joseph T Donahue Elementary School	F Bathroom		2,000	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
109	Joseph T Donahue Elementary School	SGI Rooms		1,500	16	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
110	Joseph T Donahue Elementary School	Class G		1,500	14	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
111	Joseph T Donahue Elementary School	G Bath		2,000	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
112	Joseph T Donahue Elementary School	Faculty Room		1,800	9	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
113	Joseph T Donahue Elementary School	Bathroom		2,000	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
114	Joseph T Donahue Elementary School	Class I		1,500	12	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
115	Joseph T Donahue Elementary School	Boys Room		2,000	6	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
116	Joseph T Donahue Elementary School	Custodian Closet		400	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
117	Joseph T Donahue Elementary School	Girls Room		2,000	6	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
118	Joseph T Donahue Elementary School	Possible Emergency Ballast			0	0	0	0	0			0
119	Joseph T Donahue Elementary School	EXTERIOR			0	0	0	0	0			0
120	Joseph T Donahue Elementary School	Large Wall Sconces		4,380	8	EXISTING DECORATIVE FIXTURES	0	0	0			0
121	Joseph T Donahue Elementary School	Small Wall Sconces		4,380	24	EXISTING DECORATIVE FIXTURES	0	0	0			0
122	Joseph T Donahue Elementary School	Full Face Wall Packs		4,380	30	NEW LED WALL PACK 20 WATT	20	0	0			0
123	Joseph T Donahue Elementary School	Indirect Floods		4,380	4	RELAMP 20 WATT LED FLOOD S/I	20	0	0			0
124	Joseph T Donahue Elementary School			4,380	27	NEW LED SHOEBOX LOT 100 WATT ARN	100	0	0			0
	Total: Joseph T Donahue Elementary School		Total: Joseph T Donahue Elemen	tary Scho	986			3			4,216	298

LOCATION: City, State, Zip Code: City, State, Zip Code: 0

0

	LOCATION:			EXIST	ING LIG	HTING CONTROL		F	PROPOSED LIGHTING CONTRO	LS		
Line Ref	Building	Location	EXISTING CONTROL	Existing Hrs. per Year	Lighting Qty	LIGHTING DESCRIPTION	WATT / Fixture	Control QTY	Control Description	Control Hours Reduced	New Hrs. (controlled)	KWH Saved from controls
1	Administration Building	Main Entrance		2,500	3	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
2	Administration Building	Closet		400	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
3	Administration Building	Conference Room		2,500	6	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	2	WALL SENSOR	32%	1,700	151
4	Administration Building	Hallway		2,500	7	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
5	Administration Building	Side Office		2,500	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	1	WALL SENSOR	32%	1,700	50
6	Administration Building	Files Room		2,500	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
7	Administration Building	Reception Area		2,500	5	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
8	Administration Building	Side Office		2,500	6	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	1	WALL SENSOR	32%	1,700	151
9	Administration Building	Side Office		2,500	3	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	1	WALL SENSOR	32%	1,700	76
10	Administration Building	Side Office		2,500	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
11	Administration Building	(2) Bathrooms		2,500	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
12	Administration Building	Side Office		2,500	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
13	Administration Building	Cubical Office		2,500	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	1	WALL SENSOR	32%	1,700	50
14	Administration Building	Kitchen / Break Room		2,500	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
15	Administration Building	Side Office		2,500	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	1	WALL SENSOR	32%	1,700	50
16	Administration Building	Side Office		2,500	4	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	1	WALL SENSOR	32%	1,700	101
17	Administration Building	Side Office		2,500	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	1	WALL SENSOR	32%	1,700	50
18	Administration Building	Side Office		2,500	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	1	WALL SENSOR	32%	1,700	50
19	Administration Building	Cubical Office		2,500	1	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
20	Administration Building	Cubical Office		2,500	2	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
21	Administration Building	Main Receptionist Office		2,500	2	RETROFIT 4' 3L LED TUBE / SELF BALLA	32	0	0			0
	Total: Administration Building		Total: Administration Building		61			10			15,300	731

LOCATION: LOCATION:
City, State, Zip Code: City, State, Zip Code:

	LOCATION:			EXIST	TING LIC	SHTING CONTROL			PROPOSED LIGHTING CONTR	ROLS		
Line Ref	Building	Location	EXISTING CONTROL	Existing Hrs. per Year	Lighting Qty	LIGHTING DESCRIPTION	WATT / Fixture	Control QTY	Control Description	Control Hours Reduced	New Hrs. (controlled)	KWH Saved from controls
1	Transportation / Buildings & Grounds	Warehouse		2,500	21	RETROFIT 8' 2L TO 4' 4 LED TUBE /SELF	42	0	0			0
	Transportation / Buildings & Grounds	Warehouse Office		2,500	6	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	WALL SENSOR	32%	1,700	101
3	Transportation / Buildings & Grounds	Transportation & Grounds Offi		2,500	4	RETROFIT 4' 4L LED TUBE / SELF BALLA	42		0	0270	1,1.00	0
4	Transportation / Buildings & Grounds	Transportation & Grounds Offi		2,500	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
5	Transportation / Buildings & Grounds	Side Office		2,500	2	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	1	WALL SENSOR	32%	1,700	67
6	Transportation / Buildings & Grounds	Side Office		2,500	1	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	1	WALL SENSOR	32%	1,700	34
7	Transportation / Buildings & Grounds	Copier Room		2,500	1	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	0	0	5=75	.,	0
8	Transportation / Buildings & Grounds	Side Office		2,500	1	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	1	WALL SENSOR	32%	1,700	34
9	Transportation / Buildings & Grounds	Mechanical Room		1,500	1	RELAMP 9 WATT LED A LAMP S/I	9	0	0	5=75	.,	0
10	Transportation / Buildings & Grounds	Hallway		2,500	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
11	Transportation / Buildings & Grounds	Neil Piro's Office		2,500	1	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	1	WALL SENSOR	32%	1,700	34
12	Transportation / Buildings & Grounds	Supply Room		800	1	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	0	0			0
13	Transportation / Buildings & Grounds	Pantry		2,500	1	RETROFIT 2' 2L LED TUBE / SELF BALLA	14		0			0
14	Transportation / Buildings & Grounds	Bathroom		2,500	1	RELAMP 9 WATT LED A LAMP S/I	9	0	0			0
15	Transportation / Buildings & Grounds	Bus Garage		2,500	18	RETROFIT 8' 2L TO 4' 4 LED TUBE /SELF	42	0	0			0
16	Transportation / Buildings & Grounds	Parts Room		2,500	3	RETROFIT 8' 2L TO 4' 4 LED TUBE /SELF	42	0	0			0
17	Transportation / Buildings & Grounds	Parts Room		2,500	1	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	0	0			0
18	Transportation / Buildings & Grounds	Loft		800	2	RETROFIT 8' 2L TO 4' 4 LED TUBE /SELF	42	0	0			0
19	Transportation / Buildings & Grounds	Office		2,500	1	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	1	WALL SENSOR	32%	1.700	34
20	Transportation / Buildings & Grounds	Tank Room		2,500	2	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	1	WALL SENSOR	32%	1,700	67
21	Transportation / Buildings & Grounds	Tire Room		2,500	2	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	1	WALL SENSOR	32%	1,700	67
22	Transportation / Buildings & Grounds	(2) Bathroom		2,500	2	RELAMP 9 WATT LED A LAMP S/I	9	0	0			0
23	Transportation / Buildings & Grounds	Bus Drivers Lounge Hallway		1,000	1	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
24	Transportation / Buildings & Grounds	(2) Bathroom		1,000	4	RELAMP 9 WATT LED A LAMP S/I	9	0	0			0
25	Transportation / Buildings & Grounds	Files Room		1,000	3	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	0	0			0
26	Transportation / Buildings & Grounds	Kitchen / Drivers Lounge		1,000	10	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	0	0			0
27	Transportation / Buildings & Grounds	Large Storage		800	28	RETROFIT 4' 4L LED TUBE / SELF BALLA	42	0	0			0
28	Transportation / Buildings & Grounds	Large Storage		800	4	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	0	0			0
29	Transportation / Buildings & Grounds	Large Storage		800	5	RELAMP 15 WATT LED FLOOD S/I	15	0	0			0
30	Transportation / Buildings & Grounds	Bus Drivers Lockers		1,000	9	RETROFIT 4' 2L LED TUBE / SELF BALLA	21	1	WALL SENSOR	32%	680	60
31	Transportation / Buildings & Grounds	Exterior Lighting		,	0	0	0	0	0			0
32	Transportation / Buildings & Grounds	Wall Mount Flood Fixtures		4,380	3	NEW LED FLOOD 52 WATT	52	0	0			0
33	Transportation / Buildings & Grounds	Full Face Wall Packs		4,380	2	NEW LED WALL PACK 20 WATT	20	0	0			0
34	Transportation / Buildings & Grounds	Full Face Wall Packs		4,380	1	NEW LED WALL PACK 20 WATT	20	0	0			0
35	Transportation / Buildings & Grounds	Screw In Floods		4,380	2	RELAMP 15 WATT LED FLOOD S/I	15	0	0			0
36	Transportation / Buildings & Grounds	Wall Mount Incandescents		4,380	4	RELAMP 9 WATT LED A LAMP S/I	9	0	0			0
	Total: Transportation / Buildings &				450							
	Grounds		Total: Transportation / Buildings	& Ground	150			9			14,280	497
	Grand Total		Grand Total		6,254			107				14,112

Appendix G: Jersey State Controls Proposal

55 | Page

Barnegat Township School District - Energy Savings Plan



Serving New Jersey's Construction Market Since 1983

1105 Industrial Parkway, Brick New Jersey 08724 <u>Office:</u> 732-206-0010 <u>Fax:</u> 732-206-0080 Joe Crescenzo Cell: 732-604-5733 <u>Email: Joe.crescenzo@Jscbms.com</u>

ATC QUOTATION AND SCOPE OF WORK

To: Steve Brennan Attention: Steve/Ben

PROJECT: BARNEGAT HIGH SCHOOL

JSC BID #: BID DATE:

ADDENDA:

PLANS & SPECIFICATIONS DATED: M/E CONSULTANT OR ARCHITECT:

JSC PROPOSES TO FURNISH AND INSTALL (A NEW OR EXTENSION TO) THE HVAC CONTROL/DDC SYSTEM AS DESCRIBED BELOW:

Scope including equipment, materials, labor, start up and warranty and customer training.

REFERENCES	SCOPE
THIS PROPOSAL IS IN ACCORDANCE W/PLANS	
AND SPECIFICATIONS	
FRONT END	JSC TO PROVIDE FRONT END THAT IS WEB
	BASED THAT CAN HAVE MULTIPLE
	CONCURRENT USERS (10)
BOILER	JSC TO TAKE CONTROL OF ENTIRE AERCO
	BOILER PLANT WITH PUMPS
CHILLER (2)	JSC TO TAKE CONTROL OF THE NEW
	CHILLER AND ASSOCIATED PUMPS AND
	ALSO THE EXISTING CHILLER IN THE C WING

OTHER NOTES: THIS PRICE INCLUDES WIRING OF THE COMMUNICATION CABLE, IF YOUR IN HOUSE GUYS WOULD LIKE TO DO IT, WE CAN TAKE 15% OFF OF THE TOTAL PRICE.

PRICE: \$41,210.00

Unless specifically addressed in Scope of Work - referenced above - this quotation does not include:

- 1. Rigid Threaded or PVC coated Galvanized pipe
- 2. EMT / Hard Pipe in concealed spaces
- 3. Demolition labor of existing DDC, electrical or pneumatic controls
- 4. Check out or re-commissioning of any existing controls or HVAC system related to the quoted project

Boiler trim wiring, mounting and wiring of any loose devices or accessories related to equipment provided by others. Boiler 'kill switches' or emergency shut downs are not included unless specifically specified.

- 5. Cooling system control wiring including mounting and wiring of Liebert, Daiken (or other mfr) network components, cabling or any communication or low voltage wiring related to systems being furnished by others
- 6. Cutting, patching, painting, fire stopping (other than code requirements)
- 7. Smoke dampers, Fire/Smoke Dampers or wiring therof
- 8. Installation of any valves, devices installed in piping, insulation or damper installations
- 9. Installation of controls (DDC, transformers, flow devices, etc) for VAV boxes scheduled to be factory installed
- 10. Smoke Detectors or any components related to the Fire Alarm/Life Safety System
- 11. Commissioning Labor of 3rd party controls not provided by JSC or equipment not furnished by JSC (unless specifically quoted)







- 12. Motor Starters / VFDs
- 13. Bond costs
- 14. Sales Tax
- 15. Overtime (all work figured at straight time 7am 4pm M-F) unless otherwise quoted
- 16. Scope of Work, Pricing and Terms are good for 60 days from date of Proposal

Terms and Conditions of Sale

JERSEY STATE CONTROLS CO.

- 1. **OFFER AND ACCEPTANCE**: Jersey State Controls Co. (JSC) offers to sell the materials, equipment, and services as indicated above in strict accordance with the terms and conditions stated herein. Submittal of a Purchase Order or execution of the offer by Buyer, or allowing JSC to commence work shall be deemed an acceptance of this offer, which offer and acceptance shall constitute a legally enforceable contract between Buyer and JSC. Any additional or differing terms and conditions contained on Buyer's Purchase Order (whether or not such terms materially alter this offer) are hereby rejected by JSC, and shall not become part of the contract between Buyer and JSC unless expressly consented to in writing by JSC. This offer is subject to acceptance within (30) days after date and is based on all work being performed during regular working hours. If Buyer is a Contractor which employs JSC as a subcontractor on a project for which retainage will be held, pending satisfactory completion of the project, Buyer agrees to withhold from payments to JSC the same percent of retainage withheld from its progress payments. Buyer agrees further to reduce percent of retainage held from JSC to the same level and at the same time as its percent of retainage is reduced.
- 2. **TERMS**: Terms of payment for goods shipped and/or services rendered hereunder shall be NET ON RECEIPT OF INVOICE unless specifically agreed to otherwise. JSC reserves the right to add to any account outstanding more than (60) days, a charge of one and one-half percent (1 1/2%) of the principal amount due at the end of each thirty (30) day period.
- 3. INVOICING: JSC reserves the right to issue partial or complete invoices as material is furnished and as services are rendered.
- 4. **PERFORMANCE**: JSC shall not be liable for failure to ship, or delays in delivery of equipment, or performance of services hereunder, where such failure or delay is due to the disapproval of the Buyer's payment history by JSC's Credit Department, or due to strikes, fires, natural disasters, war, accidents, national emergency, failure to secure materials from the usual sources of supply, or any other circumstances beyond the control of JSC whether or not of the classes or causes enumerated above, which shall prevent JSC from making deliveries or performing services in the usual course of its business. In the event of the disapproval of the JSC Credit Department, or the occurrence of any of the above, JSC may, at its sole option, cancel Buyer's Purchase Order without penalty or liability on the part of JSC. Alternatively, JSC may extend the time for its performance by a period equal to the duration of the cause underlying JSC's failure or delay. Receipt of the equipment or services by Buyer, upon its delivery, shall constitute a waiver of all claims for delay.
- 5. WARRANTY: JSC guarantees all materials provided against defects in workmanship and material for a period of one (1) year from the date of owner's beneficial use or date of completion of the work, at JSC's sole discretion, and will repair or reinstall any defective products or components as JSC finds defective. This warranty is based on all work being performed during JSC's normal working hours.
- 6. CANCELLATION: JSC reserves the right to collect cancellation charges (including, but not limited to, all costs and expenses incurred, plus reasonable overhead and profit against any canceled order).
- 7. COSTS TO JSC: In the event it becomes necessary for JSC to incur any costs or expenses in the collection of monies due JSC from Buyer, or to enforce any of its rights or privileges hereunder, Buyer, upon demand, shall reimburse JSC for all such costs and expenses (including, but not limited to, reasonable collection and attorney's fees).
- 8. **ENTIRE AGREEMENT**: These terms and conditions, and the matter set forth on the face of JSC's offer to sell, constitute the entire agreement between JSC and Buyer. No course of dealings or performance, or prior, concurrent or subsequent understandings, agreements or representations become part of this contract unless expressly agreed to in writing by an authorized representative of JSC.
- 9. **ASSIGNMENT**: Buyer shall not assign this contract, or any interest herein, without written consent of JSC. Any actual or attempted assignment without JSC's written consent shall entitle JSC, at its sole option, to cancel this contract and, in such event; JSC shall be entitled to payment for all work performed and materials furnished to the date of cancellation, as well as reasonable compensation for lost income and profits.



Serving New Jersey's Construction Market Since 1983

1105 Industrial Parkway, Brick New Jersey 08724 <u>Office:</u> 732-206-0010 <u>Fax:</u> 732-206-0080 Joe Crescenzo Cell: 732-604-5733 <u>Email: Joe.Crescenzo@Jscbms.com</u>

ATC QUOTATION AND SCOPE OF WORK

To: Steve Brennan Attention: Steve/Ben

PROJECT: ROBERT HORBELT SCHOOL

JSC BID #: BID DATE:

ADDENDA:

PLANS & SPECIFICATIONS DATED: M/E CONSULTANT OR ARCHITECT:

JSC PROPOSES TO FURNISH AND INSTALL (A NEW OR EXTENSION TO) THE HVAC CONTROL/DDC SYSTEM AS DESCRIBED BELOW:

Scope including equipment, materials, labor, start up and warranty and customer training.

REFERENCES	SCOPE
THIS PROPOSAL IS IN ACCORDANCE W/PLANS AND SPECIFICATIONS	
FRONT END	JSC TO PROVIDE FRONT END THAT IS WEB BASED THAT CAN HAVE MULTIPLE CONCURRENT USERS (10)
Boiler/Cooling Tower	JSC TO TAKE CONTROL OF ENTIRE AERCO/DEDIETRICH BOILER PLANT WITH ASSOCIATED PUMPS. THE COOLING TOWER WILL BE TAKEN CONTROL OF ALONG WITH THE SINGLE PUMP LOCATED OUTSIDE.
HEAT PUMPS	JSC TO TAKE CONTROL OF THE ROUGHLY (65) HEAT PUMPS IN THE CLASSROOMS/LARGER AREAS (GYM, CAFÉ, ETC.). THIS NUMBER IS AN ESTIMATE BY BEN AND WHAT WE SAW ON THE FLOORPLAN.
LARGE AHU'S	FROM WHAT BEN AND I SAW IT SEEMS LIKE THESE (3) LARGE UNITS ARE SUPPLEMENTAL HEAT/OUTSIDE AIR FOR THE CLASSROOMS WITH HEAT PUMPS. JSC TO PROGRAM THEM FOR SUCH APPLICATION UNLESS THERE IS AN ALTERNATE WAY THE DISTRICT WOULD LIKE IT TO RUN.

OTHER NOTES: THIS PRICE INCLUDES WIRING OF THE COMMUNICATION CABLE, IF YOUR IN HOUSE GUYS WOULD LIKE TO DO IT, WE CAN TAKE 15% OFF OF THE TOTAL PRICE.

PRICE: \$155,082.00







Unless specifically addressed in Scope of Work - referenced above - this quotation does not include:

- 1. Rigid Threaded or PVC coated Galvanized pipe
- 2. EMT / Hard Pipe in concealed spaces
- 3. Demolition labor of existing DDC, electrical or pneumatic controls
- 4. Check out or re-commissioning of any existing controls or HVAC system related to the quoted project
 Boiler trim wiring, mounting and wiring of any loose devices or accessories related to equipment provided by others. Boiler 'kill switches' or emergency shut downs are not included unless specifically specified.
- 5. Cooling system control wiring including mounting and wiring of Liebert, Daiken (or other mfr) network components, cabling or any communication or low voltage wiring related to systems being furnished by others
- 6. Cutting, patching, painting, fire stopping (other than code requirements)
- 7. Smoke dampers, Fire/Smoke Dampers or wiring therof
- 8. Installation of any valves, devices installed in piping, insulation or damper installations
- 9. Installation of controls (DDC, transformers, flow devices, etc) for VAV boxes scheduled to be factory installed
- 10. Smoke Detectors or any components related to the Fire Alarm/Life Safety System
- Commissioning Labor of 3rd party controls not provided by JSC or equipment not furnished by JSC (unless specifically quoted)
- 12. Motor Starters / VFDs
- 13. Bond costs
- 14. Sales Tax
- 15. Overtime (all work figured at straight time 7am 4pm M-F) unless otherwise quoted
- 16. Scope of Work, Pricing and Terms are good for 60 days from date of Proposal

Terms and Conditions of Sale

JERSEY STATE CONTROLS CO.

- 1. **OFFER AND ACCEPTANCE**: Jersey State Controls Co. (JSC) offers to sell the materials, equipment, and services as indicated above in strict accordance with the terms and conditions stated herein. Submittal of a Purchase Order or execution of the offer by Buyer, or allowing JSC to commence work shall be deemed an acceptance of this offer, which offer and acceptance shall constitute a legally enforceable contract between Buyer and JSC. Any additional or differing terms and conditions contained on Buyer's Purchase Order (whether or not such terms materially alter this offer) are hereby rejected by JSC, and shall not become part of the contract between Buyer and JSC unless expressly consented to in writing by JSC. This offer is subject to acceptance within (30) days after date and is based on all work being performed during regular working hours. If Buyer is a Contractor which employs JSC as a subcontractor on a project for which retainage will be held, pending satisfactory completion of the project, Buyer agrees to withhold from payments to JSC the same percent of retainage withheld from its progress payments. Buyer agrees further to reduce percent of retainage held from JSC to the same level and at the same time as its percent of retainage is reduced.
- 2. **TERMS**: Terms of payment for goods shipped and/or services rendered hereunder shall be NET ON RECEIPT OF INVOICE unless specifically agreed to otherwise. JSC reserves the right to add to any account outstanding more than (60) days, a charge of one and one-half percent (1 1/2%) of the principal amount due at the end of each thirty (30) day period.
- 3. INVOICING: JSC reserves the right to issue partial or complete invoices as material is furnished and as services are rendered.
- 4. **PERFORMANCE**: JSC shall not be liable for failure to ship, or delays in delivery of equipment, or performance of services hereunder, where such failure or delay is due to the disapproval of the Buyer's payment history by JSC's Credit Department, or due to strikes, fires, natural disasters, war, accidents, national emergency, failure to secure materials from the usual sources of supply, or any other circumstances beyond the control of JSC whether or not of the classes or causes enumerated above, which shall prevent JSC from making deliveries or performing services in the usual course of its business. In the event of the disapproval of the JSC Credit Department, or the occurrence of any of the above, JSC may, at its sole option, cancel Buyer's Purchase Order without penalty or liability on the part of JSC. Alternatively, JSC may extend the time for its performance by a period equal to the duration of the cause underlying JSC's failure or delay. Receipt of the equipment or services by Buyer, upon its delivery, shall constitute a waiver of all claims for delay.
- 5. **WARRANTY**: JSC guarantees all materials provided against defects in workmanship and material for a period of one (1) year from the date of owner's beneficial use or date of completion of the work, at JSC's sole discretion, and will repair or reinstall any defective products or components as JSC finds defective. This warranty is based on all work being performed during JSC's normal working hours.
- 6. CANCELLATION: JSC reserves the right to collect cancellation charges (including, but not limited to, all costs and expenses incurred, plus reasonable overhead and profit against any canceled order).
- 7. COSTS TO JSC: In the event it becomes necessary for JSC to incur any costs or expenses in the collection of monies due JSC from Buyer, or to enforce any of its rights or privileges hereunder, Buyer, upon demand, shall reimburse JSC for all such costs and expenses (including, but not limited to, reasonable collection and attorney's fees).
- 8. **ENTIRE AGREEMENT**: These terms and conditions, and the matter set forth on the face of JSC's offer to sell, constitute the entire agreement between JSC and Buyer. No course of dealings or performance, or prior, concurrent or subsequent understandings, agreements or representations become part of this contract unless expressly agreed to in writing by an authorized representative of JSC.
- 9. **ASSIGNMENT**: Buyer shall not assign this contract, or any interest herein, without written consent of JSC. Any actual or attempted assignment without JSC's written consent shall entitle JSC, at its sole option, to cancel this contract and, in such event; JSC shall be entitled to payment for all work performed and materials furnished to the date of cancellation, as well as reasonable compensation for lost income and profits.



Serving New Jersey's Construction Market Since 1983

1105 Industrial Parkway, Brick New Jersey 08724 <u>Office:</u> 732-206-0010 <u>Fax:</u> 732-206-0080 Joe Crescenzo Cell: 732-604-5733 <u>Email: Joe.Crescenzo@Jscbms.com</u>

ATC QUOTATION AND SCOPE OF WORK

To: Steve Brennan Attention: Steve/Ben

PROJECT: RUSSELL BRACKMAN MIDDLE SCHOOL

JSC BID #: BID DATE:

ADDENDA:

PLANS & SPECIFICATIONS DATED: M/E CONSULTANT OR ARCHITECT:

JSC PROPOSES TO FURNISH AND INSTALL (A NEW OR EXTENSION TO) THE HVAC CONTROL/DDC SYSTEM AS DESCRIBED BELOW:

Scope including equipment, materials, labor, start up and warranty and customer training.

References	SCOPE
THIS PROPOSAL IS IN ACCORDANCE W/PLANS	
AND SPECIFICATIONS	
FRONT END	JSC TO PROVIDE FRONT END THAT IS WEB
	BASED THAT CAN HAVE MULTIPLE
	CONCURRENT USERS (10)
DOAS UNITS	THERE ARE (6) DOAS UNITS THAT PROVIDE
	FRESH AIR THROUGHOUT THE BUILDING.
	THESE HAVE DX COOLING AND HOT WATER
	VALVES. JSC TO CONTROL THESE AND
	SEQUENCE THEM TO THE EXACT SEQUENCE
	THEY WERE RUNNING PRIOR.
AAON RTU's	THERE ARE (8) PACKAGED ROOFTOP UNITS
	ON THE ROOF THAT SERVE THE GYM'S (6),
	THE MAIN OFFICE (1) AND THE WEIGHT
	коом (1).
BOILER AND GEOTHERMAL PLANT	JSC TO TAKE CONTROL OF ENTIRE BOILER
	PLANT WITH ASSOCIATED PUMPS THAT
	SERVE THE NEW WING. THE GEOTHERMAL
	PLANT WILL BE TAKEN CONTROL OVER AS
	WELL INCLUDING CONTROL OF THE
	COOLING TOWER AND ASSOCIATED PUMPS.
WATER SOURCE HEAT PUMPS	THERE ARE ROUGHLY (12) OF THESE THAT
	SERVE VARIOUS PARTS OF THE BUILDING
	THAT HAVE DX ALONG WITH ELECTRIC HEAT
	AND WILL WORK OFF A THERMOSTAT.
CABINET/UNIT HEATERS	THERE ARE AN ESTIMATED (12)
	THROUGHOUT THE BUILDING THAT WE WILL
	CONTROL VIA A THERMOSTAT. JSC WILL
	MONITOR THE SPACE TEMP AND ALARM IF
	THE FAN IS CALLED TO BE ON AND IS NOT
	RUNNING.







Unit Vents	JSC TO TAKE CONTROL OF THE ROUGHLY
	(53) Unit Vents in the classrooms, this
	NUMBER IS AN ESTIMATE BY BEN AND WHAT
	WE SAW ON THE FLOORPLAN. JSC TO
	SEQUENCE THEM THE SAME WAY THEY
	WERE BEING CONTROLLED PRIOR.
VAV's	THE "NEW" WING HAS ROUGHLY (20) VAV
	BOX'S WITH REHEAT COILS. JSC TO TAKE
	CONTROL OF THE VAV BOX'S ALONG WITH
	THE REHEAT COILS.

OTHER NOTES: THIS PRICE INCLUDES WIRING OF THE COMMUNICATION CABLE, IF YOUR IN HOUSE GUYS WOULD LIKE TO DO IT, WE CAN TAKE 15% OFF OF THE TOTAL PRICE.

PRICE: \$282,675.00

Unless specifically addressed in Scope of Work - referenced above - this quotation does not include:

- 1. Rigid Threaded or PVC coated Galvanized pipe
- 2. EMT / Hard Pipe in concealed spaces
- 3. Demolition labor of existing DDC, electrical or pneumatic controls
- 4. Check out or re-commissioning of any existing controls or HVAC system related to the quoted project

Boiler trim wiring, mounting and wiring of any loose devices or accessories related to equipment provided by others. Boiler 'kill switches' or emergency shut downs are not included unless specifically specified.

- Cooling system control wiring including mounting and wiring of Liebert, Daiken (or other mfr) network components, cabling or any communication or low voltage wiring related to systems being furnished by others
- 6. Cutting, patching, painting, fire stopping (other than code requirements)
- 7. Smoke dampers, Fire/Smoke Dampers or wiring therof
- 8. Installation of any valves, devices installed in piping, insulation or damper installations
- 9. Installation of controls (DDC, transformers, flow devices, etc) for VAV boxes scheduled to be factory installed
- 10. Smoke Detectors or any components related to the Fire Alarm/Life Safety System
- 11. Commissioning Labor of 3rd party controls not provided by JSC or equipment not furnished by JSC (unless specifically quoted)
- 12. Motor Starters / VFDs
- 13. Bond costs
- 14. Sales Tax
- 15. Overtime (all work figured at straight time 7am 4pm M-F) unless otherwise quoted
- 16. Scope of Work, Pricing and Terms are good for 60 days from date of Proposal

Terms and Conditions of Sale

JERSEY STATE CONTROLS CO.

- 1. **OFFER AND ACCEPTANCE**: Jersey State Controls Co. (JSC) offers to sell the materials, equipment, and services as indicated above in strict accordance with the terms and conditions stated herein. Submittal of a Purchase Order or execution of the offer by Buyer, or allowing JSC to commence work shall be deemed an acceptance of this offer, which offer and acceptance shall constitute a legally enforceable contract between Buyer and JSC. Any additional or differing terms and conditions contained on Buyer's Purchase Order (whether or not such terms materially alter this offer) are hereby rejected by JSC, and shall not become part of the contract between Buyer and JSC unless expressly consented to in writing by JSC. This offer is subject to acceptance within (30) days after date and is based on all work being performed during regular working hours. If Buyer is a Contractor which employs JSC as a subcontractor on a project for which retainage will be held, pending satisfactory completion of the project, Buyer agrees to withhold from payments to JSC the same percent of retainage withheld from its progress payments. Buyer agrees further to reduce percent of retainage held from JSC to the same level and at the same time as its percent of retainage is reduced.
- 2. **TERMS**: Terms of payment for goods shipped and/or services rendered hereunder shall be NET ON RECEIPT OF INVOICE unless specifically agreed to otherwise. JSC reserves the right to add to any account outstanding more than (60) days, a charge of one and one-half percent (1 1/2%) of the principal amount due at the end of each thirty (30) day period.
- 3. INVOICING: JSC reserves the right to issue partial or complete invoices as material is furnished and as services are rendered.
- 4. **PERFORMANCE**: JSC shall not be liable for failure to ship, or delays in delivery of equipment, or performance of services hereunder, where such failure or delay is due to the disapproval of the Buyer's payment history by JSC's Credit Department, or due to strikes, fires, natural disasters, war, accidents, national emergency, failure to secure materials from the usual sources of supply, or any other circumstances beyond the control of JSC whether or not of the classes or causes enumerated above, which shall prevent JSC from making deliveries or performing services in the usual course of its business. In the event of the disapproval of the JSC Credit Department, or the occurrence of any of the above, JSC may, at its sole option, cancel Buyer's Purchase Order without penalty or liability on the part of JSC. Alternatively, JSC may extend the time for its performance by a period equal to the duration of the cause underlying JSC's failure or delay. Receipt of the equipment or services by Buyer, upon its delivery, shall constitute a waiver of all claims for delay.
- 5. WARRANTY: JSC guarantees all materials provided against defects in workmanship and material for a period of one (1) year from the date of owner's beneficial use or date of completion of the work, at JSC's sole discretion, and will repair or reinstall any defective products or components as JSC finds defective. This warranty is based on all work being performed during JSC's normal working hours.
- 6. CANCELLATION: JSC reserves the right to collect cancellation charges (including, but not limited to, all costs and expenses incurred, plus reasonable overhead and

profit against any canceled order).

- 7. COSTS TO JSC: In the event it becomes necessary for JSC to incur any costs or expenses in the collection of monies due JSC from Buyer, or to enforce any of its rights or privileges hereunder, Buyer, upon demand, shall reimburse JSC for all such costs and expenses (including, but not limited to, reasonable collection and attorney's fees).
- 8. **ENTIRE AGREEMENT:** These terms and conditions, and the matter set forth on the face of JSC's offer to sell, constitute the entire agreement between JSC and Buyer. No course of dealings or performance, or prior, concurrent or subsequent understandings, agreements or representations become part of this contract unless expressly agreed to in writing by an authorized representative of JSC.
- 9. **ASSIGNMENT**: Buyer shall not assign this contract, or any interest herein, without written consent of JSC. Any actual or attempted assignment without JSC's written consent shall entitle JSC, at its sole option, to cancel this contract and, in such event; JSC shall be entitled to payment for all work performed and materials furnished to the date of cancellation, as well as reasonable compensation for lost income and profits.



Serving New Jersey's Construction Market Since 1983

1105 Industrial Parkway, Brick New Jersey 08724 <u>Office:</u> 732-206-0010 <u>Fax:</u> 732-206-0080 Joe Crescenzo Cell: 732-604-5733 <u>Email: Joe.Crescenzo@Jscbms.com</u>

ATC QUOTATION AND SCOPE OF WORK

To: Steve Brennan Attention: Steve/Ben

PROJECT: COLLINS ELEMENTARY SCHOOL

JSC BID #: BID DATE:

ADDENDA:

PLANS & SPECIFICATIONS DATED: M/E CONSULTANT OR ARCHITECT:

JSC PROPOSES TO FURNISH AND INSTALL (A NEW OR EXTENSION TO) THE HVAC CONTROL/DDC SYSTEM AS DESCRIBED BELOW:

Scope including equipment, materials, labor, start up and warranty and customer training.

References	SCOPE
This proposal is in accordance w/plans and specifications	
FRONT END	JSC TO PROVIDE FRONT END THAT IS WEB BASED THAT CAN HAVE MULTIPLE CONCURRENT USERS (10)
BOILER	JSC TO TAKE CONTROL OF ENTIRE AERCO BOILER PLANT WITH PUMPS
AHU/RTU's (10)	JSC TO TAKE CONTROL OF THE 10 AHU/RTU UNITS AND WILL RE-SEQUENCE THEM BASED ON THE EXISTING SEQUENCE.
ERU's (4)	JSC TO TAKE CONTROL OF THE 4 ERU'S THAT SERVE FRESH AIR FOR THE CLASSROOMS. JSC WILL RE-SEQUENCE THESE BASED ON THE EXISTING SEQUENCE.
VAV's (42)	THERE ARE ROUGHLY 42 VAV'S THAT SERVE THE CLASSROOMS THAT JSC WILL TAKE CONTROL OVER AND ALSO HAVE A BALANCER COME OUT AND PROPERLY BALANCE THE CFM REQUIREMENTS FOR EACH SPACE.
UV CONTROL (34)	CURRENTLY THE UV'S IN CLASSROOMS ARE BEING TURNED ON/OFF BASED ON SPACE TEMP AND ADDITIONAL HEAT NEEDED IN THE AREAS, JSC TO REPLICATE CURRENT SEQUENCE.

OTHER NOTES: THIS PRICE INCLUDES WIRING OF THE COMMUNICATION CABLE, IF YOUR IN HOUSE GUYS WOULD LIKE TO DO IT, WE CAN TAKE 15% OFF OF THE TOTAL PRICE.

PRICE: \$163,372.00







Unless specifically addressed in Scope of Work - referenced above - this quotation does not include:

- 1. Rigid Threaded or PVC coated Galvanized pipe
- 2. EMT / Hard Pipe in concealed spaces
- 3. Demolition labor of existing DDC, electrical or pneumatic controls
- 4. Check out or re-commissioning of any existing controls or HVAC system related to the quoted project Boiler trim wiring, mounting and wiring of any loose devices or accessories related to equipment provided by others. Boiler 'kill switches' or emergency shut downs are not included unless specifically specified.
- 5. Cooling system control wiring including mounting and wiring of Liebert, Daiken (or other mfr) network components, cabling or any communication or low voltage wiring related to systems being furnished by others
- 6. Cutting, patching, painting, fire stopping (other than code requirements)
- 7. Smoke dampers, Fire/Smoke Dampers or wiring therof
- 8. Installation of any valves, devices installed in piping, insulation or damper installations
- 9. Installation of controls (DDC, transformers, flow devices, etc) for VAV boxes scheduled to be factory installed
- 10. Smoke Detectors or any components related to the Fire Alarm/Life Safety System
- 11. Commissioning Labor of 3rd party controls not provided by JSC or equipment not furnished by JSC (unless specifically quoted)
- 12. Motor Starters / VFDs
- 13. Bond costs
- 14. Sales Tax
- 15. Overtime (all work figured at straight time 7am 4pm M-F) unless otherwise quoted
- 16. Scope of Work, Pricing and Terms are good for 60 days from date of Proposal

Terms and Conditions of Sale

JERSEY STATE CONTROLS CO.

- 1. **OFFER AND ACCEPTANCE**: Jersey State Controls Co. (JSC) offers to sell the materials, equipment, and services as indicated above in strict accordance with the terms and conditions stated herein. Submittal of a Purchase Order or execution of the offer by Buyer, or allowing JSC to commence work shall be deemed an acceptance of this offer, which offer and acceptance shall constitute a legally enforceable contract between Buyer and JSC. Any additional or differing terms and conditions contained on Buyer's Purchase Order (whether or not such terms materially alter this offer) are hereby rejected by JSC, and shall not become part of the contract between Buyer and JSC unless expressly consented to in writing by JSC. This offer is subject to acceptance within (30) days after date and is based on all work being performed during regular working hours. If Buyer is a Contractor which employs JSC as a subcontractor on a project for which retainage will be held, pending satisfactory completion of the project, Buyer agrees to withhold from payments to JSC the same percent of retainage withheld from its progress payments. Buyer agrees further to reduce percent of retainage held from JSC to the same level and at the same time as its percent of retainage is reduced.
- 2. **TERMS**: Terms of payment for goods shipped and/or services rendered hereunder shall be NET ON RECEIPT OF INVOICE unless specifically agreed to otherwise. JSC reserves the right to add to any account outstanding more than (60) days, a charge of one and one-half percent (1 1/2%) of the principal amount due at the end of each thirty (30) day period.
- 3. INVOICING: JSC reserves the right to issue partial or complete invoices as material is furnished and as services are rendered.
- 4. **PERFORMANCE**: JSC shall not be liable for failure to ship, or delays in delivery of equipment, or performance of services hereunder, where such failure or delay is due to the disapproval of the Buyer's payment history by JSC's Credit Department, or due to strikes, fires, natural disasters, war, accidents, national emergency, failure to secure materials from the usual sources of supply, or any other circumstances beyond the control of JSC whether or not of the classes or causes enumerated above, which shall prevent JSC from making deliveries or performing services in the usual course of its business. In the event of the disapproval of the JSC Credit Department, or the occurrence of any of the above, JSC may, at its sole option, cancel Buyer's Purchase Order without penalty or liability on the part of JSC. Alternatively, JSC may extend the time for its performance by a period equal to the duration of the cause underlying JSC's failure or delay. Receipt of the equipment or services by Buyer, upon its delivery, shall constitute a waiver of all claims for delay.
- 5. **WARRANTY**: JSC guarantees all materials provided against defects in workmanship and material for a period of one (1) year from the date of owner's beneficial use or date of completion of the work, at JSC's sole discretion, and will repair or reinstall any defective products or components as JSC finds defective. This warranty is based on all work being performed during JSC's normal working hours.
- 6. CANCELLATION: JSC reserves the right to collect cancellation charges (including, but not limited to, all costs and expenses incurred, plus reasonable overhead and profit against any canceled order).
- 7. COSTS TO JSC: In the event it becomes necessary for JSC to incur any costs or expenses in the collection of monies due JSC from Buyer, or to enforce any of its rights or privileges hereunder, Buyer, upon demand, shall reimburse JSC for all such costs and expenses (including, but not limited to, reasonable collection and attorney's fees).
- 8. ENTIRE AGREEMENT: These terms and conditions, and the matter set forth on the face of JSC's offer to sell, constitute the entire agreement between JSC and

Buyer. No course of dealings or performance, or prior, concurrent or subsequent understandings, agreements or representations become part of this contract unless expressly agreed to in writing by an authorized representative of JSC.

9. **ASSIGNMENT**: Buyer shall not assign this contract, or any interest herein, without written consent of JSC. Any actual or attempted assignment without JSC's written consent shall entitle JSC, at its sole option, to cancel this contract and, in such event; JSC shall be entitled to payment for all work performed and materials furnished to the date of cancellation, as well as reasonable compensation for lost income and profits.



Serving New Jersey's Construction Market Since 1983

1105 Industrial Parkway, Brick New Jersey 08724 <u>Office:</u> 732-206-0010 <u>Fax:</u> 732-206-0080 Joe Crescenzo Cell: 732-604-5733 <u>Email: Joe.Crescenzo@Jscbms.com</u>

ATC QUOTATION AND SCOPE OF WORK

To: Steve Brennan Attention: Steve/Ben

PROJECT: DONAHUE ELEMENTARY SCHOOL

JSC Bid #: Bid Date:

ADDENDA:

PLANS & SPECIFICATIONS DATED: M/E CONSULTANT OR ARCHITECT:

JSC PROPOSES TO FURNISH AND INSTALL (A NEW OR EXTENSION TO) THE HVAC CONTROL/DDC SYSTEM AS DESCRIBED BELOW:

Scope including equipment, materials, labor, start up and warranty and customer training.

REFERENCES	SCOPE
THIS PROPOSAL IS IN ACCORDANCE W/PLANS AND SPECIFICATIONS	
FRONT END	JSC TO PROVIDE FRONT END THAT IS WEB BASED THAT CAN HAVE MULTIPLE CONCURRENT USERS (10)
Boiler/Cooling Tower	JSC TO TAKE CONTROL OF ENTIRE AERCO BOILER PLANT WITH (2) ASSOCIATED PUMPS AND THE COOLING TOWER ALONG WITH ITS (2) ASSOCIATED PUMPS.
DOAS (5)	JSC TO TAKE CONTROL OF THE 4 DOAS UNITS THAT SERVE FRESH AIR FOR THE CLASSROOMS. JSC WILL RE-SEQUENCE THESE BASED ON THE EXISTING SEQUENCE.
WATER SOURCE HP'S (47)	THERE ARE ROUGHLY 47 WSHP'S THAT SERVE THE CLASSROOMS THAT JSC WILL TAKE CONTROL OVER AND WILL SEQUENCE THESE TO OPERATE AS THEY WERE PREVIOUSLY.

OTHER NOTES: THIS PRICE INCLUDES WIRING OF THE COMMUNICATION CABLE, IF YOUR IN HOUSE GUYS WOULD LIKE TO DO IT, WE CAN TAKE 15% OFF OF THE TOTAL PRICE.

PRICE: \$163,372.00







Unless specifically addressed in Scope of Work – referenced above – this quotation does not include:

- 1. Rigid Threaded or PVC coated Galvanized pipe
- 2. EMT / Hard Pipe in concealed spaces
- 3. Demolition labor of existing DDC, electrical or pneumatic controls
- 4. Check out or re-commissioning of any existing controls or HVAC system related to the quoted project

Boiler trim wiring, mounting and wiring of any loose devices or accessories related to equipment provided by others. Boiler 'kill switches' or emergency shut downs are not included unless specifically specified.

- 5. Cooling system control wiring including mounting and wiring of Liebert, Daiken (or other mfr) network components, cabling or any communication or low voltage wiring related to systems being furnished by others
- 6. Cutting, patching, painting, fire stopping (other than code requirements)
- 7. Smoke dampers, Fire/Smoke Dampers or wiring therof
- 8. Installation of any valves, devices installed in piping, insulation or damper installations
- 9. Installation of controls (DDC, transformers, flow devices, etc) for VAV boxes scheduled to be factory installed
- 10. Smoke Detectors or any components related to the Fire Alarm/Life Safety System
- 11. Commissioning Labor of 3rd party controls not provided by JSC or equipment not furnished by JSC (unless specifically quoted)
- 12. Motor Starters / VFDs
- 13. Bond costs
- 14. Sales Tax
- 15. Overtime (all work figured at straight time 7am 4pm M-F) unless otherwise quoted
- 16. Scope of Work, Pricing and Terms are good for 60 days from date of Proposal

Terms and Conditions of Sale

JERSEY STATE CONTROLS CO.

- 1. **OFFER AND ACCEPTANCE**: Jersey State Controls Co. (JSC) offers to sell the materials, equipment, and services as indicated above in strict accordance with the terms and conditions stated herein. Submittal of a Purchase Order or execution of the offer by Buyer, or allowing JSC to commence work shall be deemed an acceptance of this offer, which offer and acceptance shall constitute a legally enforceable contract between Buyer and JSC. Any additional or differing terms and conditions contained on Buyer's Purchase Order (whether or not such terms materially alter this offer) are hereby rejected by JSC, and shall not become part of the contract between Buyer and JSC unless expressly consented to in writing by JSC. This offer is subject to acceptance within (30) days after date and is based on all work being performed during regular working hours. If Buyer is a Contractor which employs JSC as a subcontractor on a project for which retainage will be held, pending satisfactory completion of the project, Buyer agrees to withhold from payments to JSC the same percent of retainage withheld from its progress payments. Buyer agrees further to reduce percent of retainage held from JSC to the same level and at the same time as its percent of retainage is reduced.
- 2. **TERMS**: Terms of payment for goods shipped and/or services rendered hereunder shall be NET ON RECEIPT OF INVOICE unless specifically agreed to otherwise. JSC reserves the right to add to any account outstanding more than (60) days, a charge of one and one-half percent (1 1/2%) of the principal amount due at the end of each thirty (30) day period.
- 3. INVOICING: JSC reserves the right to issue partial or complete invoices as material is furnished and as services are rendered.
- 4. **PERFORMANCE**: JSC shall not be liable for failure to ship, or delays in delivery of equipment, or performance of services hereunder, where such failure or delay is due to the disapproval of the Buyer's payment history by JSC's Credit Department, or due to strikes, fires, natural disasters, war, accidents, national emergency, failure to secure materials from the usual sources of supply, or any other circumstances beyond the control of JSC whether or not of the classes or causes enumerated above, which shall prevent JSC from making deliveries or performing services in the usual course of its business. In the event of the disapproval of the JSC Credit Department, or the occurrence of any of the above, JSC may, at its sole option, cancel Buyer's Purchase Order without penalty or liability on the part of JSC. Alternatively, JSC may extend the time for its performance by a period equal to the duration of the cause underlying JSC's failure or delay. Receipt of the equipment or services by Buyer, upon its delivery, shall constitute a waiver of all claims for delay.
- 5. WARRANTY: JSC guarantees all materials provided against defects in workmanship and material for a period of one (1) year from the date of owner's beneficial use or date of completion of the work, at JSC's sole discretion, and will repair or reinstall any defective products or components as JSC finds defective. This warranty is based on all work being performed during JSC's normal working hours.
- 6. CANCELLATION: JSC reserves the right to collect cancellation charges (including, but not limited to, all costs and expenses incurred, plus reasonable overhead and profit against any canceled order).
- 7. COSTS TO JSC: In the event it becomes necessary for JSC to incur any costs or expenses in the collection of monies due JSC from Buyer, or to enforce any of its rights or privileges hereunder, Buyer, upon demand, shall reimburse JSC for all such costs and expenses (including, but not limited to, reasonable collection and attorney's fees).
- 8. **ENTIRE AGREEMENT**: These terms and conditions, and the matter set forth on the face of JSC's offer to sell, constitute the entire agreement between JSC and Buyer. No course of dealings or performance, or prior, concurrent or subsequent understandings, agreements or representations become part of this contract unless expressly agreed to in writing by an authorized representative of JSC.
- 9. **ASSIGNMENT**: Buyer shall not assign this contract, or any interest herein, without written consent of JSC. Any actual or attempted assignment without JSC's written consent shall entitle JSC, at its sole option, to cancel this contract and, in such event; JSC shall be entitled to payment for all work performed and materials furnished to the date of cancellation, as well as reasonable compensation for lost income and profits.



Serving New Jersey's Construction Market Since 1983

1105 Industrial Parkway, Brick New Jersey 08724 <u>Office:</u> 732-206-0010 <u>Fax:</u> 732-206-0080 Joe Crescenzo Cell: 732-604-5733 <u>Email: Joe.Crescenzo@Jscbms.com</u>

ATC QUOTATION AND SCOPE OF WORK

To: Steve Brennan Attention: Steve/Ben

PROJECT: LILLIAN M DUNFEE SCHOOL

JSC BID #: BID DATE:

ADDENDA:

PLANS & SPECIFICATIONS DATED: M/E CONSULTANT OR ARCHITECT:

JSC PROPOSES TO FURNISH AND INSTALL (A NEW OR EXTENSION TO) THE HVAC CONTROL/DDC SYSTEM AS DESCRIBED BELOW:

Scope including equipment, materials, labor, start up and warranty and customer training.

REFERENCES	SCOPE
THIS PROPOSAL IS IN ACCORDANCE W/PLANS AND SPECIFICATIONS	
FRONT END	JSC TO PROVIDE FRONT END THAT IS WEB BASED THAT CAN HAVE MULTIPLE CONCURRENT USERS (10)
BOILER	JSC TO TAKE CONTROL OF ENTIRE LAARS BOILER PLANT WITH ASSOCIATED PUMPS.
LARGE 4 SEASONS UNITS	JSC TO TAKE CONTROL OF THESE (4) LARGE UNITS THAT SERVE THE CLASSROOM POD AREAS. THEY EACH HAVE AN AVERAGE OF 7-8 ZONES PER UNIT.
AAON VAV RTU's	JSC TO TAKE CONTROL OF THE (2) AAON RTU'S THAT SERVE THE 10 VAV BOX'S IN THE 5 TH GRADE WING.
AAON RTU'S	JSC TO TAKE CONTROL OF THE (3) RTU'S IN THE GYM AND THE LIBRARY MEDIA CENTER. JSC TO INSTALL BACNET COMMUNICATING THERMOSTAT FOR THIS SINGLE SPACE CONTROL.
VAV's	JSC TO INSTALL CONTROLS TO OPERATE THE 10 VAV'S IN THE 5 TH GRADE WING.
MULTIPURPOSE ROOM AHU	KSC TO TAKE CONTROL OF THIS LARGE AHU THAT HAS 4 STAGES OF ELECTRIC HEAT SUPPLYING THE M.P. ROOM.







OTHER NOTES: THIS PRICE INCLUDES WIRING OF THE COMMUNICATION CABLE, IF YOUR IN HOUSE GUYS WOULD LIKE TO DO IT, WE CAN TAKE 15% OFF OF THE TOTAL PRICE.

PRICE: \$131,881.00

Unless specifically addressed in Scope of Work - referenced above - this quotation does not include:

- 1. Rigid Threaded or PVC coated Galvanized pipe
- 2. EMT / Hard Pipe in concealed spaces
- 3. Demolition labor of existing DDC, electrical or pneumatic controls
- 4. Check out or re-commissioning of any existing controls or HVAC system related to the quoted project

Boiler trim wiring, mounting and wiring of any loose devices or accessories related to equipment provided by others. Boiler 'kill switches' or emergency shut downs are not included unless specifically specified.

- 5. Cooling system control wiring including mounting and wiring of Liebert, Daiken (or other mfr) network components, cabling or any communication or low voltage wiring related to systems being furnished by others
- 6. Cutting, patching, painting, fire stopping (other than code requirements)
- 7. Smoke dampers, Fire/Smoke Dampers or wiring therof
- 8. Installation of any valves, devices installed in piping, insulation or damper installations
- 9. Installation of controls (DDC, transformers, flow devices, etc.) for VAV boxes scheduled to be factory installed
- 10. Smoke Detectors or any components related to the Fire Alarm/Life Safety System
- 11. Commissioning Labor of 3rd party controls not provided by JSC or equipment not furnished by JSC (unless specifically quoted)
- 12. Motor Starters / VFDs
- 13. Bond costs
- 14. Sales Tax
- 15. Overtime (all work figured at straight time 7am 4pm M-F) unless otherwise quoted
- 16. Scope of Work, Pricing and Terms are good for 60 days from date of Proposal

Terms and Conditions of Sale

JERSEY STATE CONTROLS CO.

- 1. **OFFER AND ACCEPTANCE**: Jersey State Controls Co. (JSC) offers to sell the materials, equipment, and services as indicated above in strict accordance with the terms and conditions stated herein. Submittal of a Purchase Order or execution of the offer by Buyer, or allowing JSC to commence work shall be deemed an acceptance of this offer, which offer and acceptance shall constitute a legally enforceable contract between Buyer and JSC. Any additional or differing terms and conditions contained on Buyer's Purchase Order (whether or not such terms materially alter this offer) are hereby rejected by JSC, and shall not become part of the contract between Buyer and JSC unless expressly consented to in writing by JSC. This offer is subject to acceptance within (30) days after date and is based on all work being performed during regular working hours. If Buyer is a Contractor which employs JSC as a subcontractor on a project for which retainage will be held, pending satisfactory completion of the project, Buyer agrees to withhold from payments to JSC the same percent of retainage withheld from its progress payments. Buyer agrees further to reduce percent of retainage held from JSC to the same level and at the same time as its percent of retainage is reduced.
- 2. **TERMS**: Terms of payment for goods shipped and/or services rendered hereunder shall be NET ON RECEIPT OF INVOICE unless specifically agreed to otherwise. JSC reserves the right to add to any account outstanding more than (60) days, a charge of one and one-half percent (1 1/2%) of the principal amount due at the end of each thirty (30) day period.
- 3. INVOICING: JSC reserves the right to issue partial or complete invoices as material is furnished and as services are rendered.
- 4. **PERFORMANCE**: JSC shall not be liable for failure to ship, or delays in delivery of equipment, or performance of services hereunder, where such failure or delay is due to the disapproval of the Buyer's payment history by JSC's Credit Department, or due to strikes, fires, natural disasters, war, accidents, national emergency, failure to secure materials from the usual sources of supply, or any other circumstances beyond the control of JSC whether or not of the classes or causes enumerated above, which shall prevent JSC from making deliveries or performing services in the usual course of its business. In the event of the disapproval of the JSC Credit Department, or the occurrence of any of the above, JSC may, at its sole option, cancel Buyer's Purchase Order without penalty or liability on the part of JSC. Alternatively, JSC may extend the time for its performance by a period equal to the duration of the cause underlying JSC's failure or delay. Receipt of the equipment or services by Buyer, upon its delivery, shall constitute a waiver of all claims for delay.
- 5. WARRANTY: JSC guarantees all materials provided against defects in workmanship and material for a period of one (1) year from the date of owner's beneficial use or date of completion of the work, at JSC's sole discretion, and will repair or reinstall any defective products or components as JSC finds defective. This warranty is based on all work being performed during JSC's normal working hours.
- 6. CANCELLATION: JSC reserves the right to collect cancellation charges (including, but not limited to, all costs and expenses incurred, plus reasonable overhead and profit against any canceled order).
- 7. COSTS TO JSC: In the event it becomes necessary for JSC to incur any costs or expenses in the collection of monies due JSC from Buyer, or to enforce any of its rights or privileges hereunder, Buyer, upon demand, shall reimburse JSC for all such costs and expenses (including, but not limited to, reasonable collection and attorney's fees).
- 8. **ENTIRE AGREEMENT**: These terms and conditions, and the matter set forth on the face of JSC's offer to sell, constitute the entire agreement between JSC and Buyer. No course of dealings or performance, or prior, concurrent or subsequent understandings, agreements or representations become part of this contract unless expressly agreed to in writing by an authorized representative of JSC.
- 9. **ASSIGNMENT**: Buyer shall not assign this contract, or any interest herein, without written consent of JSC. Any actual or attempted assignment without JSC's written consent shall entitle JSC, at its sole option, to cancel this contract and, in such event; JSC shall be entitled to payment for all work performed and materials furnished to the date of cancellation, as well as reasonable compensation for lost income and profits.

Appendix H: BPU Forms

FORM I

ENGINEERING FIRM'S PRELIMINARY ENERGY SAVINGS PLAN (ESP): GENERAL INFORMATION: CONTRACTOR BARNEGAT TOWNSHIP SCHOOL DISTRICT ENERGY SAVINGS IMPROVEMENT PROGRAM

1.	Name of firm:	CHA Consulting, Inc.		
2.	Address:	III Winner's Circle		
		PO Box 5307		
		Albany, NY 12205-0307		
3.	Contact person for t	this project (Name & Title):	Mike Tsal	kaloyannis
			Project M	anager
4.	Telephone number	of contact person:	(518) 453	
	E-mail address of co			yannis@CHACompanies.com
	Lead personnel for			isory or other responsibility for the work to be
	Name			Title
	Mike Tsakaloyannis	:	_	Project Manager
	Michael Masny		_	Energy Section Manager
	Richard Adamski		_	Project Engineer IV
			_	
			-	
			-	
			-	
			_	
			-	
			_	
			_	
			_	

FORM II

ENGINEERING FIRM'S PRELIMINARY ENERGY SAVINGS PLAN (ESP): ENERGY CONSERVATION MEASURES (ECMs) SUMMARY FORM BARNEGAT TOWNSHIP SCHOOL DISTRICT ENERGY SAVINGS IMPROVEMENT PROGRAM

Engineer Name: CHA Consulting, Inc.

Proposed Preliminary Energy Savings Plan: EMCs (Base Project)		Estimated Installed Hard Costs (1) (\$)		timated Annual Savings (\$)	Estimated Simple Payback (years)
1.01	Convert all interior lighting to LED lighting	\$ 1,082,118	\$	68,513	15.8
1.02	Install occupancy/daylight/dimming controls	\$ 44,333	\$	3,140	14.1
1.03	Convert all exterior lighting to LED lighting and install controls	\$ 150,215	\$	13,417	11.2
2.01	Replace Boilers, optimization controls	\$ 758,967	\$	7,995	94.9
2.02	DHW Boiler Upgrade	\$ 38,114	\$	773	49.3
2.03	DHW Tankless System Conversion	\$ 10,611	\$	175	60.8
2.04	DHW Heater Electric to a Natural Gas Conversion	\$ 26,779	\$	658	40.7
2.05	Install VFDs on Pumps	\$ 16,280	\$	361	45.1
2.06	Install VFDs on AHU Fans	\$ 188,172	\$	20,645	9.1
2.09	Upgrade Select WSHPs	\$ 183,131	\$	2,784	65.8
2.10	Convert AHUs w/ Electric Heat to Hydronic Heat	\$ 33,293	\$	3,862	8.6
2.13	Replace Mini-Split Units	\$ 14,368	\$	109	131.3
2.14	Exhaust Fan Controls Upgrade	\$ 21,321	\$	3,315	6.4
2.15	Replace Cooling Tower	\$ 245,865	\$	1,221	201.4
2.17	Replace Air Cooled Chiller	\$ 203,855	\$	3,625	56.2
3.01	Controls Systems Upgrades	\$ 1,207,607	\$	32,743	36.9
3.02	Install Walk-In Refrigerator/Freezer Controls	\$ 50,484	\$	5,142	9.8
3.03	Install kitchen hood controls	\$ 250,048	\$	2,439	102.5
3.04	Kitchen hood controls optimization	\$ 8,954	\$	1,355	6.6
3.08	Add occupancy-based controls to the Vending Machines	\$ 10,102	\$	3,123	3.2
6.01	Install CHP and Controls	\$ 333,593	\$	5,071	65.8
	Project Summary:	\$ 4,878,212	\$	180,465	27.0

Optional ECMs Considered, but not included with base project at this time		Estimated Installed Hard Costs (\$)		Estimated Annual Savings (\$)		Estimated Simple Payback (years)
2.01	Replace Boilers, optimization controls (Brackman)	\$	315,634	\$	2,157	146.3
2.15	Replace Cooling Tower (Horbelt)	\$	245,865	\$	1,221	201.4
2.09	Upgrade WSHPs (Brackman)	\$	195,298	\$	(3,928)	-49.7
	Project Summary w/ Optional ECMs:	\$	5,635,009	\$	179,915	31.3

FORM III

ENGINEERING FIRM'S PRELIMINARY ENERGY SAVINGS PLAN (ESP): PROJECTED ANNUAL ENERGY SAVINGS DATA FORM BARNEGAT TOWNSHIP SCHOOL DISTRICT ENERGY SAVINGS IMPROVEMENT PROGRAM

Engineer Name: CHA Consulting, Inc.

Energy / Water	Engineer Developed Baseline (Units)	Engineer Developed Baseline (Costs \$)	Proposed Annual Savings (Units)	Proposed Annual Savings (Cost \$)
Electric Demand (kW)	1,877.1		379.6	\$ 2,322
Electric Energy (kWh)	5,565,440	\$ 658,027	1,270,584	\$ 124,425
Natural Gas (therms)	123,201	\$ 132,715	14,910	\$ 16,143
Steam (Lbs)	0	\$ -	0	\$ -
Water (Gallons)	5,297,000	\$ 124,035	753,863	\$ 4,556
Other (Specify Units)	N/A	N/A	N/A	N/A
Other (Specify Units)	N/A	N/A	N/A	N/A

Avoided Emissions	Provide in Pounds (Lbs)
CO ₂	5,406,530 Lbs
NO _X	3,498 Lbs
SO ₂	2,713 Lbs

FORM IV

ENGINEERING FIRM'S PRELIMINARY ENERGY SAVINGS PLAN (ESP): PROJECTED ANNUAL ENERGY SAVINGS DATA FORM IN MMBTUS BARNEGAT TOWNSHIP SCHOOL DISTRICT ENERGY SAVINGS IMPROVEMENT PROGRAM

IA Consulting, Inc.

Energy / Water	Engineer Developed Baseline (Units)	Proposed Annual Savings (Units)	Comments
Electric Energy (kWh)	\$ 658,027	1,270,584	
Natural Gas (therms)	\$ 132,715	14,910	
Steam (Lbs)	\$	0	N/A
Water (Gallons)	\$ 124,035	753,863	
Other (Specify Units)	N/A	N/A	N/A
Other (Specify Units)	N/A	N/A	N/A

FORM V

ENGINEERING FIRM'S PRELIMINARY ENERGY SAVINGS PLAN (ESP): ENGINEER'S PROPOSED FINAL PROJECT COST FORM FOR BASE CASE PROJECT BARNEGAT TOWNSHIP SCHOOL DISTRICT ENERGY SAVINGS IMPROVEMENT PROGRAM

Engineer Name:	CHA Consulting, Inc.
g	0 0 0 oak 19, o.

PROPOSED CONSTRUCTION FEES

PROPOSED CONSTRUCTION FEES Fee Category	Fees Dollar (\$) Value	Percentage of Hard Costs
Estimated Value of Hard Costs	4,891,724	
Project Service Fees	785,103	16.0%
Investment Grade Energy Audit	179,100	3.7%
Design Engineering Fees	341,003	
Construction Management & Project Administration	37,800	0.8%
System Commissioning	66,300	1.4%
3rd Party Review	20,000	0.4%
Design Review	40,900	0.8%
Permitting Fees	20,000	0.4%
Financiing Fees	60,000	1.2%
Reimbursable Expenses	20,000	0.4%
Engineer Overhead	0	0.0%
Engineer Profit	0	0.0%
Total Project Costs	5,676,827	
Rounding	173	
Total Financed Project Costs	5,677,000	

PROPOSED ANNUAL SERVICE FEES

First Year Annual Service Fees	Fees Dollar (\$) Value	Percentage of Hard Costs	
Savings Guarantee (Option)	N/A	N/A	
Measurement and Verification (Associated w/ Savings Guarantee Option)	N/A	N/A	
Energy Star Services (Optional)	N/A	N/A	
Post Construction Services (if applicable)	N/A	N/A	
Performance Monitoring	N/A	N/A	
On-Going Training Services	N/A	N/A	
Verification Reports	N/A	N/A	
Total First Year Annual Services	N/A	N/A	

FORM VI

ENGINEERING FIRM'S PRELIMINARY ENERGY SAVINGS PLAN (ESP): ENGINEER'S PRELIMINARY ANNUAL CASH FLOW ANALYSIS FORM BARNEGAT TOWNSHIP SCHOOL DISTRICT ENERGY SAVINGS IMPROVEMENT PROGRAM

Engineer Name:	CHA Consulting, Inc.	

Annual Electric Inflation Rate: 2.20%
Annual Natural Gas Inflation Rate: 2.40%

 1. Term of Agreement:
 18 Years

 2. Construction Period:
 12 Months

3. Cash Flow Analysis Format:

Project Cost: ____\$5,677,000_ Interest Rate: _____2.60%

Year	Annual Energy Savings	Annual Photovoltaic Savings	Annual Operational Savings	Energy Rebates / Incentives	Total Annual Savings	Annual Project Costs	Annual Service Costs	Net Cash Flow to Client	Cummulative Cash Flow
Installation									
1.	\$185,088	\$149,034	(\$1,062)	\$0	\$333,060	(\$329,973)	\$ -	\$3,087	\$3,087
2.	\$189,306	\$152,779	(\$1,062)	\$230,556	\$571,579	(\$568,165)	\$ -	\$3,414	\$6,500
3.	\$193,620	\$156,616	(\$1,562)	\$230,556	\$579,229	(\$575,764)	\$ -	\$3,465	\$9,966
4.	\$198,032	\$160,547	(\$1,562)	\$0	\$357,017	(\$353,885)	\$ -	\$3,132	\$13,098
5.	\$202,545	\$164,575	(\$1,562)	\$0	\$365,558	(\$362,580)	\$ -	\$2,978	\$16,076
6.	\$207,161	\$168,703	(\$1,562)	\$0	\$374,302	(\$370,885)	\$ -	\$3,417	\$19,492
7.	\$211,882	\$172,932	(\$1,562)	\$0	\$383,252	(\$379,787)	\$ -	\$3,465	\$22,957
8.	\$216,710	\$177,265	(\$1,562)	\$0	\$392,413	(\$389,260)	\$ -	\$3,153	\$26,110
9.	\$221,648	\$181,705	(\$1,562)	\$0	\$401,790	(\$398,291)	\$ -	\$3,499	\$29,609
10.	\$226,699	\$186,254	(\$1,562)	\$0	\$411,390	(\$407,867)	\$ -	\$3,523	\$33,132
11.	\$231,865	\$190,914	(\$1,562)	\$0	\$421,217	(\$417,962)	\$ -	\$3,255	\$36,387
12.	\$237,149	\$195,689	(\$1,562)	\$0	\$431,276	(\$427,563)	\$ -	\$3,713	\$40,100
13.	\$242,553	\$200,582	(\$1,562)	\$0	\$441,573	(\$438,644)	\$ -	\$2,929	\$43,029
14.	\$248,080	\$205,595	(\$1,562)	\$0	\$452,112	(\$449,179)	\$ -	\$2,933	\$45,962
15.	\$253,733	\$210,730	(\$1,562)	\$0	\$462,901	(\$459,168)	\$ -	\$3,733	\$49,695
16.	\$259,515	\$0	(\$1,562)	\$0	\$257,953	(\$254,432)	\$ -	\$3,521	\$53,216
17.	\$265,429	\$0	(\$1,562)	\$0	\$263,867	(\$260,088)	\$ -	\$3,779	\$56,994
18.	\$271,478	\$0	(\$1,562)	\$0	\$269,916	(\$266,419)	\$ -	\$3,497	\$60,491
19.	\$277,664	\$0	(\$1,562)	\$0	\$276,102	\$0	\$ -	\$276,102	\$336,593
20.	\$283,991	\$0	(\$1,562)	\$0	\$282,429	\$0	\$ -	\$282,429	\$619,021
Totals	\$4,624,148	\$2,673,920	(\$30,247)	\$461,112	\$7,728,933	(\$7,109,912)	\$0	\$619,021	\$619,021

Appendix I: Barnegat Township Board of Education Re	solution

57 | Page

Barnegat Township School District - Energy Savings Plan





550 BARNEGAT BOULEVARD NORTH BARNEGAT, NEW JERSEY 08005 (609) 698-5800 FAX (609) 660-5974

Dr. Brian LatwisSuperintendent of Schools

Stephen J. Brennan, MBA, CPA *Business Administrator/Board Secretary*

I, Stephen Brennan Business Administrator/Board Secretary of the Board of Education of the Township of Barnegat, in the County of Ocean, New Jersey, HEREBY CERTIFY that the foregoing resolution was duly adopted at a meeting of the Board of Education of said School District duly called and held on July 28, 2020, and is a true, complete and correct copy thereof.

Energy Savings Improvement Plan

WHEREAS, The Board of Education of the Barnegat Township School District in the County of Ocean, New Jersey (the "School District") is a political subdivision created by law, and the board of education (the "Board of Education") of the School District is charged by law with the responsibility of providing a system of public education within the School District over which it has jurisdiction and has the authority to provide Energy Conservation Measures and Equipment for the School District as permitted and authorized by law; and

WHEREAS the Board of Education previously decided to investigate implementation of an energy savings improvement program and hired the firm of CHA (the "Energy Audit Firm") to conduct energy audits of the School District facilities. and the Energy Audit Firm conducted the audits and delivered to this Board of Education energy audit reports with respect to the School District facilities; and

WHEREAS, the Board of Education determined to develop and implement an energy savings improvement program with the assistance of the School District Architect, Spiezle Architectural Group, Inc. ("Spiezle"), and

WHEREAS, the Board of Education received the Emery Savings Plan issued by CHA on June 16, 2020, subject to verification by a third party verification agent and approval by the Board of Public Utilities (the "BPU"); and

WHEREAS, the energy Savings Plan identifies \$6,145,000 in available energy savings measures

WHEREAS, this Board of Education advertised for and received bids to select a third party verification agent (the "Verification Agent") to verify the energy savings to be realized through the Energy Savings Plan, the Board of Education selected Schiller and Hersh Associates to be its verification agent,

WHEREAS, after reviewing the approved Energy Savings Plan, this Board of Education wishes to reconfirm its determination that the energy savings generated from reduced energy use from the program will be sufficient to cover the cost of the program's Energy Conservation Measures, including the Equipment, set forth

Our collective mission is to nurture and educate our children in accordance with all curriculum standards to prepare them for responsible citizenship and success in life.



BARNEGAT TOWNSHIP SCHOOL DISTRICT

550 BARNEGAT BOULEVARD NORTH BARNEGAT, NEW JERSEY 08005 (609) 698-5800 FAX (609) 660-5974

Dr. Brian LatwisSuperintendent of Schools

Stephen J. Brennan, MBA, CPA *Business Administrator/Board Secretary*

in the Energy Savings Plan and that it is in the best interest of the School District to implement the plan pursuant to N.J.S.A. 18A:18A-4.6; and

NOW, THEREFORE, BE IT RESOLVED BY THE BOARD OF EDUCATION OF THE BARNEGAT TOWNSHIP SCHOOL DISTRICT IN THE COUNTY OF OCEAN, NEW JERSEY as follows:

Section 1. The Board of Education accepts the Energy Savings Plan issued by CHA dated June 30, 2020, subject to verification by a third party verification agent and approval by the Board of Public Utilities (the "BPU"); and

Section 2. Upon receipt of the third party verification report, the Board authorizes the Business Administrator to submit the Energy Savings Plan for review and approval by the Board of Public Utilities.

Section 3. The Board of Education hereby reaffirms and ratifies its determination that the energy savings generated from reduced energy use from the Energy Conservation Measures set for in the Energy Savings Plan will be sufficient to cover the cost of the program's Energy Conservation Measures, that it is in the best interest of the School District to implement the Energy Savings plan pursuant to N.J.S.A. 18A:18A-4.6 and that it reaffirms and ratifies its approval of the Energy Savings Plan in the form submitted to and approved by the BPU.

Section 4. This resolution shall take effect immediately.

Motion by: Mr. Sherman Seconded by: Mr. Geddes

Ms. Continanza, Yes; Mr. Geddes, Yes; Mr. O'Brien, Yes; Mrs. Pereira, Yes; Mr. Quelch, Yes; Ms. Sarno, Absent; Mr. Sawicki; Yes; Mr. Sherman, Yes; Mr. Hickey, Yes.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the corporate seal of said School District this 30th day of July 2020.

Stephen Brennan, MBA, CPA

Business Administrator/Board Secretary

BARNEGAT TOWNSHIP SCHOOL DISTRICT



550 BARNEGAT BOULEVARD NORTH BARNEGAT, NEW JERSEY 08005 (609) 698-5800 FAX (609) 660-5974

Dr. Brian LatwisSuperintendent of Schools

Stephen J. Brennan, MBA, CPA *Business Administrator/Board Secretary*

I, Stephen Brennan Business Administrator/Board Secretary of the Board of Education of the Township of Barnegat, in the County of Ocean, New Jersey, HEREBY CERTIFY that the foregoing resolution was duly adopted at a meeting of the Board of Education of said School District duly called and held on July 28, 2020, and is a true, complete and correct copy thereof.

1. Motion to approve the following RESOLUTION OF THE BOARD OF EDUCATION OF THE TOWNSHIP OF BARNEGAT IN THE COUNTY OF OCEAN, NEW JERSEY MAKING APPLICATION TO THE LOCAL FINANCE BOARD PURSUANT TO N.J.S.A. 18A:18A-4.6(1)(c)(3) AND N.J.S.A. 18A:24-61.1 *ET SEQ*.

WHEREAS, The Board of Education of the Township of Barnegat in the County of Ocean, New Jersey (the "Board of Education") desires to make application to the Local Finance Board for its approval of a School Energy Savings Obligation Refunding Bond Ordinance pursuant to N.J.S.A. 18A:18A-4.6(1)(c)(3) and N.J.S.A. 18A:24-61.1 *et seq*. in order to provide for energy conservation improvements for the school district; and

WHEREAS, the Board of Education believes that:

- (a) it is in the public interest to accomplish such purpose;
- (b) the purpose is for the health, the welfare, the convenience or the betterment of the inhabitants of the school district;
- (c) the amounts to be expended for the purpose or the improvements are not unreasonable or exorbitant; and
- (d) the proposal is an efficient and feasible means of providing services for the needs of the inhabitants of the school district and will not create an undue financial burden to be placed upon the school district;

NOW, THEREFORE, BE IT RESOLVED BY THE BOARD OF EDUCATION OF THE TOWNSHIP OF BARNEGAT IN THE COUNTY OF OCEAN as follows:

Section 1. The application to the Local Finance Board is hereby approved, and the Board of Education's Bond Counsel and Financial Advisor, along with other representatives of the Board of Education, are hereby authorized to prepare such application and to represent the Board of Education in matters pertaining thereto.

Our collective mission is to nurture and educate our children in accordance with all curriculum standards to prepare them for responsible citizenship and success in life.

BARNEGAT TOWNSHIP SCHOOL DISTRICT

550 BARNEGAT BOULEVARD NORTH BARNEGAT, NEW JERSEY 08005 (609) 698-5800 FAX (609) 660-5974

Dr. Brian LatwisSuperintendent of Schools

Stephen J. Brennan, MBA, CPA *Business Administrator/Board Secretary*

Section 2. The Business Administrator/Board Secretary of the Board of Education is hereby directed to prepare and to file a certified copy of the financing documents authorizing the Bonds with the Local Finance Board as part of such application.

Section 3. The Local Finance Board is hereby respectfully requested to consider such application and to record its findings and approval as provided by the applicable New Jersey Statutes.

Motion by: Mr. Sherman Seconded by: Mr. Geddes

Ms. Continanza, Yes; Mr. Geddes, Yes; Mr. O'Brien, Yes; Mrs. Pereira, Yes; Mr. Quelch, Yes; Ms. Sarno, Absent; Mr. Sawicki; Yes; Mr. Sherman, Yes; Mr. Hickey, Yes.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the corporate seal of said School District this 30th day of July 2020.

Stephen Brennan, MBA, CPA

Stephe Brennan

Business Administrator/Board Secretary