STATE OF NORTH CAROLINA/ASHEVILLE CITY SCHOOLS

REQUEST FOR INFORMAL BIDS

#148-MAINT-008

PROJECT: Ira B. Jones Elementary New Outdoor Classroom PROJECT

USING AGENCY: Asheville City Schools ISSUE DATE: 2/14/2022

Bids subject to the conditions made a part hereof will be received until 2:00 pm, Monday, February 28, 2022, for furnishing all labor, materials, equipment, and services incidental and implied, for completion of the project described herein.

All Bids must be sent to the Purchasing Clerk at the address or email address provided below:

Asheville City Schools

Attn: Chris Pohlman, Purchasing Phone: 828-350-6101 85 Mountain Street Fax: 828-251-4915

Asheville, NC 28801 Email: chris.pohlman@acsgmail.net

Direct inquiries concerning this RFIB to:

Bidding and document questions: Chris Pohlman, Purchasing Clerk Office: 828-350-6101
Specifications and/or technical questions: Tim Shelton, Maintenance Director Mobile: 828-713-6430

THE PROCUREMENT PROCESS

The following is a general description of the process by which a firm will be selected to provide services.

- 1. Request for Informal Bids (RFIB), which refers to projects less than \$300,000, is issued to prospective contractors.
- 2. The deadline for written questions is three days prior to the due date.
- 3. Bids shall be signed and dated by an official authorized to bind the firm. Unsigned bids will not be considered.
- 4. All bids must be received by the issuing agency not later than the date and time specified on the cover sheet of this RFIB.
- 5. Bids will be evaluated according to completeness, content, experience with similar projects, ability of the offeror and its staff, and cost. Award of a contract to one offeror does not mean that the other bids lacked merit, but that, all factors considered, the selected bid was deemed most advantageous to the State.
- 6. Offerors are cautioned that this is a request for bids, not a request to contract, and the State/Asheville City Schools reserves the right to reject any and all unqualified offers when such rejection is deemed to be in the best interest of the State.

BID FORM

#148-MAINT-008

Ira B. Jones Elementary New Outdoor Classroom PROJECT DUE DATE: 2/28/2022 by 2:00PM

The undersigned having carefully read and considered the terms and conditions of the Contract Documents for Ira B. Jones Elementary New Outdoor Classroom Project for Asheville City Schools, North Carolina, does hereby offer to perform such services on behalf of the District, of the type and quality and in the manner described, and subject to and in accordance with the terms and conditions set forth in the Contract Documents at the rates on the Bid Forms hereinafter set forth

Offeror:			
City/State/Zip:		Phone:	
Fed ID No:	MBE Status:	Fax:	
Email:			
By: (Signature)		Date:	
Printed Name		Title:	
·	epted, to furnish the subject service		, and one grow on one
	\$	Total	
Additional Information, if	applicable (attach extra sheets as	needed):	

END OF BID FORM

1. SCOPE OF WORK

The purpose of this solicitation is request Bids for the construction of a new classroom building at Ira B. Jones Elementary, which will be accessible from the existing walkway. For the full Scope of Work, please see the architectural drawings, which can be found as Attachment A to this solicitation.

The Contractor shall furnish all labor, material, tools, equipment, transportation, insurance, and incidentals necessary to perform the work described herein.

2. CONDITIONS

Each Bidder shall fully acquaint itself with conditions relating to the scope and restrictions attending the execution of the work under Contract. Bidders shall thoroughly examine and be familiar with the Specifications.

It is also expected that the Bidders will obtain information concerning the conditions at locations that may affect its work. The failure or omission of any Bidder to receive or examine any form, instrument, addendum or other document, or to acquaint itself with existing conditions, shall in no way relieve it of any obligations with respect to its Bid or to the Contract.

The Bidder shall make its own determination as to conditions and shall assume all risk and responsibility and shall complete the work in and under conditions it may encounter or create, without extra cost to Asheville City Schools.

3. QUALITY OF WORK

All work shall be performed in a good and professional manner by skilled, experienced workers. Asheville City Schools shall be responsible for determining the quality of work, and may notify the Contractor of the same.

4. LICENSES AND PERMITS

The Contractor shall obtain all licenses and permits required to execute contract by authorities that have jurisdiction.

5. **SAFETY REGULATIONS:**

The Contractor shall adhere to the rules, regulations, and interpretations of all state, federal, and local laws that pertain to workers and site safety. This to include OSHA 1910, General Construction, or those regulations mandated by these specifications.

6. NONDISCRIMINATION

The Contractor shall not discriminate against any person because of race, sex, age, creed, color, religion or national origin.

7. HISTORICALLY UNDERUTILLIZED BUSINESSES

Pursuant to General Statute 143-48 and Executive Order #150, Asheville City Schools invited and encourages participation in this procurement process by businesses owned by minorities, women, disabled business enterprises and non-profit work centers for the blind and severely disabled.

8. **INDEMNITY**

The Contractor will indemnify and save harmless Asheville City Schools, its officers, agents, servants, and employees from and against any and all suits, actions, legal proceedings, claims, demands, damages, costs, expenses, and attorneys' fees to the extent resulting from a willful or negligent act or omission of the Contractor, its officers, agents, servants, and employees in the performance of this Contract; provided, however, that the Contractor shall not be liable for any suits, actions, legal proceedings, claims, demands, damages, costs,

expenses and attorneys' fees arising out of the award of this Contract or a willful or negligent act or omission of the Asheville City Schools, its officers, agents, servants and employees.

9. **INSURANCE**

If awarded a contract, the Bidder will provide a Certificate of Liability Insurance naming the District as additional insured. The issuing insurer must provide 30 days written notice to the District of the expiration of the insurance. As a minimum, the Contractor shall provide and maintain the following coverage and limits:

- Workers' Compensation Insurance, including Employer's Liability with limits of \$250,000 each accident. The Aggregate Limit will not be less than \$2,000,000.
- Property Damage Insurance, including Liability Coverage, with a per occurrence limit of \$1,000,000. The Aggregate Limit will not be less than \$2,000,000

Providing and maintaining adequate insurance coverage is a material obligation of the contractor and is of the essence of this contract. All such insurance shall meet all laws of the State of North Carolina. Such insurance coverage shall be obtained from companies that are authorized to provide such coverage and that are authorized by the Commissioner of Insurance to do business in North Carolina. The Contractor shall at all times comply with the terms of such insurance policies, and all requirements of the insurer under any such insurance policies, except as they may conflict with existing North Carolina laws or this contract. The limits of coverage under each insurance policy maintained by the contractor shall not be interpreted as limiting the contractor's liability and obligations under the contract.

To the extent permitted by law, all or any part of any required insurance coverages may be provided under a plan or plans of self-insurance. The coverages may be provided by the Contractor's parent corporation.

10. **TERMINATION**:

The District may terminate this agreement at any time by 15 days' notice in writing from the District to the Contractor. If the contract is terminated by the District as provided herein, the Contractor shall be paid for services satisfactorily completed, less payment or compensation previously made.

11. SALES AND USE TAX

The North Carolina General Assembly has amended the Statute to provide refunds of sales and use tax to local school units in accordance with the provisions of G.S. 105-164. 14(c) effective with tax paid on or after July 1, 1998.

These refunds are to include the "sales and use taxes paid by contractors on building materials, supplies, fixtures and equipment that become a part of or annexed to a building or structure that is owned or leased by the governmental entity and is being erected, altered or repaired for use by the governmental entity (G.S. 105-164.14)."

Sales and Use Tax Technical Bulletin Section 18-2F specifies: "To substantiate a refund claim for sales or use taxes paid on purchases of building materials, supplies, fixtures and equipment by its contractor, the claimant must secure from such contractor certified statements setting forth all of the following information:

- a. the date the property was purchased;
- b. the type of property purchased;
- c. the project for which the property was used;
- d. if the property was purchased in this State, the county in which it was purchased;
- e. if the property was not purchased in this State, the county in which the property was used; and
- f. the amount of sales and use taxes paid.

In the event the contractor makes several purchases from the same vendor, such certified statement must indicate the invoice numbers, the inclusive dates of the invoices, the total amount of the invoices and the State and local sales and use taxes paid thereon. Such statement must also include the cost of any tangible personal

property withdrawn from the contractor's warehouse stock and the amount of sales and use tax paid thereon by the contractor. Similar certified statements by his subcontractors must be obtained by the general contractor and furnished to the claimant. Any local sales or use taxes must be shown separately from the State sales or use taxes. The contractor's statements must not contain sales or use taxes paid on purchases of tangible personal property purchased by such contractors for use in performing the contract which does not annex to, affix to or in some manner become a part of the building or structure that is owned or leased by a governmental agency and is being erected, altered or repaired for use by a governmental entity as defined by G.S. 105-164.14(c). Examples of property on which sales or use tax has been paid by the contractor and which shall not be included in the contractor's statement are scaffolding, forms for concrete, fuel for the operation of machinery and equipment, tools, repair parts and equipment rentals.

12. TRANSFERABILITY OF CONTRACT

Other than by operation of law, no assignment of the Contract or any right accruing under this Contract shall be made in whole or in part by the Contractor without the express written consent of Asheville City Schools, which consent shall not be unreasonably withheld; however, in the event of an assignment, the assignee shall assume the liability of the Contractor.

13. CONTRACT NOT A FRANCHISE


It is the understanding and intention of the parties hereto that this agreement shall constitute a contract for the collection and disposal/processing of refuse and commingled recycling materials; that said Contract shall not constitute a franchise nor shall the same be deemed or construed as such.

Attachment A


Asheville City Schools RFP# 148-MAINT-008 Ira B. Jones Elementary New Outdoor Classroom PROJECT

NOVUS always new








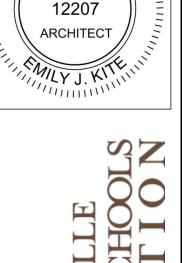






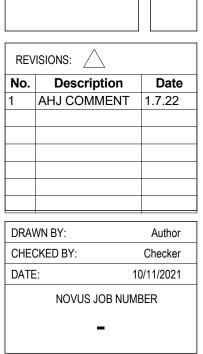

G001

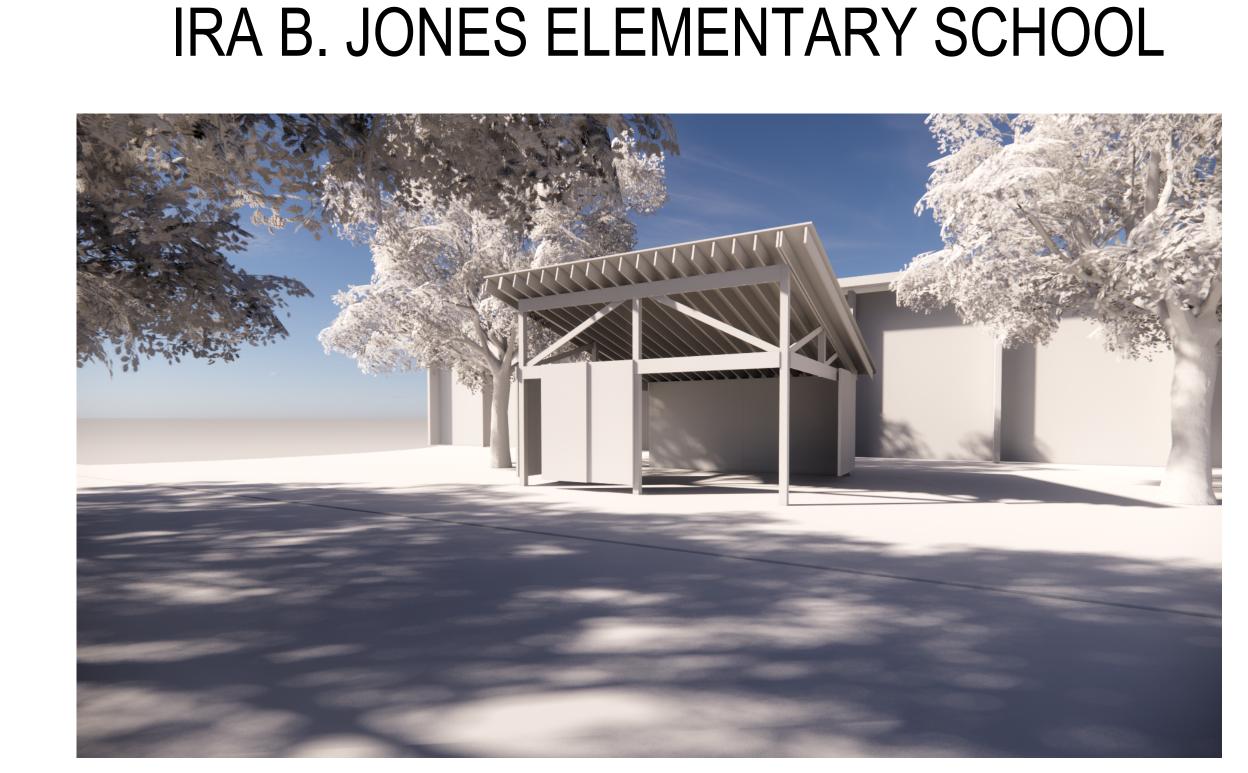

PROJECT DESCRIPTION

NEW 400 SF TYPE VB PAVILION BUILDING FOR OUTDOOR CLASSROOM USE. PIN NEW ACCESSIBLE MULCHED AREA, ACCESSIBLE FROM EXISTING WALK. ZONIN

SITE & BUILDING STATISTICS

DRAINAGE INFO BUILDING DEPT

EXISTING DRAINAGE PATTERNS TO REMAIN BUNCOMBE COUNTY

≥30' (TOTAL)

APPENDIX B SITE PLAN **PLANS**

SHEET LIST


ELEVATIONS SECTIONS AND DETAILS



FIRE PROTECTION REQUIREMEN	ITS FIR)E		RATING	DETAIL#	DESIGN#	SHEET # FOR	S
	SEPAR. DISTA	ATION	REQ'D	PROVIDED	AND SHEET#	FOR RATED	RATED PENETRATION	
	(FEE		REQU	(W/* REDUCTION)	0 ,,	ASSEMBLY		
STRUCTURAL FRAME,								
INCLUDING COLUMNS, GIRDERS AND TRUSSES	-		NA	0 HR	-	-	-	
BEARING WALLS EXTERIOR	-		NA	NA	-	-	-	
NORTH	-		0HR O HR	O HR	-	-	-	
EAST WEST	-		O HR O HR	O HR O HR	-	-	-	
SOUTH	-		O HR		-	-	-	
NON-BEARING WALLS AND	-		O HR	O HR	-	-	-	
PARTITIONS EXTERIOR	<u>></u> 5'		-	-	-	-	-	
NORTH	-		O HR	O HR -	-	-	-	
EAST WEST	- <u>></u> 5'	_{	4 UD		-	-	-	
SOUTH	-	_{	1 HR		-	-	-	
INTERIOR WALLS AND PARTITIONS	-		NA NA	1	-	-	-	
FLOOR CONSTRUCTION INCLUDING SUPPORTING	ı		INA		_		_	
BEAMS AND JOISTS			NA		<u> </u>		<u>-</u>	
FLOOR CEILING ASSEMBLIES COLUMNS SUPPORTING FLOORS	<u> </u>	-	NA		-	-	-	
ROOF CONSTRUCTION	•		NA		<u> </u>	-	<u> </u>	+
INCLUDING SUPPORTING BEAMS AND JOISTS			0 HR	O HR	-	-	-	
ROOF CEILING ASSEMBLIES			0 HR	O HR	-	-	-	
COLUMNS SUPPORTING ROOFS SHAFT ENCLOSURES - EXIT		_	O HR NA	O HR N/A	-	-	-	_
SHAFT ENCLOSURES - OTHER CORRIDOR SEPARATION			NA	N/A	-	-	-	
OCCUPANCY / FIRE BARRIER SER	PARATION		NA NA	N/A N/A	-	-	-	
PARTY / FIRE WALL SEPARATION			NA	N/A	-	-	-	
			NI/A	NI/A				
SMOKE BARRIER SEPARATION SMOKE PARTITION			N/A NA	N/A N/A	-	-	-	
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN	RMITTING G CALCUL	ATION	NA N/A N/A CTION	N/A N/A N/A		- - - E ARFA (%)	ACTUALLY SH	OWN
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE	RMITTING G CALCUL	DEGI PRO	NA N/A N/A CTION S REE OF O TECTION (P, NS	N/A N/A N/A	ALLOWABLI	- - E AREA (%)	ACTUALLY SHOPLANS (%) N/A N/A	OWN
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F. FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25'	RMITTING G CALCUL	DEGI PRO U	NA N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS	N/A N/A N/A PENINGS	N/A N/A N/A	- - E AREA (%)	PLANS (%) N/A N/A N/A	OWN
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F FROM PROPERTY LINES 10' < 15' 15' < 20'	RMITTING G CALCUL	DEGI PRO U	NA N/A N/A CTION S REE OF O TECTION (P, NS P, NS	N/A N/A N/A PENINGS	N/A N/A		PLANS (%) N/A N/A	OWN
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F. FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRES	RMITTING G CALCUL EET)	DEGI PRO U	NA N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS	N/A N/A N/A PENINGS TABLE 705.8)	N/A N/A N/A N/A		PLANS (%) N/A N/A N/A	OWN
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRED EMERGENCY LIGHTING: EXIT SIGNS:	RMITTING G CALCUL EET)	DEGI PRO U	NA N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS	N/A N/A N/A PENINGS	N/A N/A N/A N/A		PLANS (%) N/A N/A N/A	OWN
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRE! EMERGENCY LIGHTING:	RMITTING G CALCUL EET)	DEGI PRO U	NA N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS YES	N/A N/A N/A PENINGS TABLE 705.8)	N/A N/A N/A N/A	E AREA (%)	PLANS (%) N/A N/A N/A	OWN
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F. FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRER EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM:	ERMITTING G CALCUL EET) MENTS	DEGI PRO U	NA N/A N/A TOTION S REE OF O TECTION (P, NS P, NS P, NS P, NS P, NS YES YES YES	N/A N/A N/A PENINGS TABLE 705.8) NO	N/A N/A N/A N/A		PLANS (%) N/A N/A N/A	OWN
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRE EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION	RMITTING G CALCUL EET) MENTS	DEGI PRO U	NA N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS YES YES YES YES YES	N/A N/A N/A N/A PENINGS TABLE 705.8) NO	N/A N/A N/A N/A		PLANS (%) N/A N/A N/A	OWN
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F. FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRER EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION LIFE SAFETY PLAN REQUIREMENT LIFE SAFETY PLAN SHEET #: -	RMITTING G CALCUL EET) MENTS	ATION DEGIPRO U U U	NA N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS YES YES YES YES YES	N/A N/A N/A N/A PENINGS TABLE 705.8) NO NO NO NO NO NO NO	N/A N/A N/A N/A		PLANS (%) N/A N/A N/A	OWN
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F. FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRER EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION	RMITTING G CALCUL EET) MENTS I: D WALL LO	ATION DEGIPRO U U U CATION	NA N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS YES YES YES YES YES YES YES NS (CHAP	N/A N/A N/A N/A PENINGS TABLE 705.8) NO NO NO NO NO TER 7)	N/A N/A N/A N/A		PLANS (%) N/A N/A N/A	OWN
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F. FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRER EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION LIFE SAFETY PLAN REQUIREMENT LIFE SAFETY PLAN SHEET #: - FIRE AND / OR SMOKE RATE! ASSUMED AND REAL PROPE EXTERIOR WALL OPENING A	G CALCUL EET) MENTS D WALL LO RTY LINE L REA WITH	ATION DEGIPHO U U U CATION DCATION	NA N/A N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS YES YES YES YES YES YES CHAP ONS (IF N	N/A N/A N/A N/A N/A PENINGS TABLE 705.8) NO NO TER 7) OT ON THE SITE STANCE TO ASS	N/A N/A N/A N/A O O O O O O O O O O O O O O O O O O O	PARTIAL ERTY LINES (70	PLANS (%) N/A N/A N/A N/A	OWN
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRED EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION LIFE SAFETY PLAN REQUIREME LIFE SAFETY PLAN SHEET #: - FIRE AND / OR SMOKE RATE ASSUMED AND REAL PROPE EXTERIOR WALL OPENING A OCCUPANCY USE FOR EACH OCCUPANT LOADS FOR EACH	RMITTING G CALCUL EET) MENTS I: NTS D WALL LO RTY LINE I REA WITH I AREA AS H AREA	ATION DEGIPHO U U U CATION DCATION DCATION RESPE	NA N/A N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS YES YES YES YES YES YES CHAP ONS (IF N	N/A N/A N/A N/A N/A PENINGS TABLE 705.8) NO NO TER 7) OT ON THE SITE STANCE TO ASS	N/A N/A N/A N/A O O O O O O O O O O O O O O O O O O O	PARTIAL ERTY LINES (70	PLANS (%) N/A N/A N/A N/A	OWN
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F. FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRER EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION LIFE SAFETY PLAN REQUIREME LIFE SAFETY PLAN SHEET #: - FIRE AND / OR SMOKE RATE ASSUMED AND REAL PROPE EXTERIOR WALL OPENING A OCCUPANCY USE FOR EACH OCCUPANT LOADS FOR EACH EXIT ACCESS TRAVEL DISTA	ERMITTING G CALCUL EET) MENTS I: NTS D WALL LO RTY LINE L REA WITH I AREA AS H AREA NCES (101	ATION DEGIPHO U U U U CATIOI CATIOI RESPE IT RELA	NA N/A N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS P, NS YES YES YES YES YES ONS (CHAP ONS (IF N	N/A N/A N/A N/A N/A PENINGS TABLE 705.8) I NO I N	N/A N/A N/A N/A O O O O O O O O O O O O O O O O O O O	PARTIAL ERTY LINES (70	PLANS (%) N/A N/A N/A N/A	OWN
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRED EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION LIFE SAFETY PLAN REQUIREME LIFE SAFETY PLAN SHEET #: - FIRE AND / OR SMOKE RATED ASSUMED AND REAL PROPE EXTERIOR WALL OPENING A OCCUPANCY USE FOR EACH OCCUPANT LOADS FOR EACH COMMON PATH OF TRAVEL IN COMMON PATH OF TRAVEL IN DEAD END LENGTHS (1020.4)	ERMITTING G CALCUL EET) WENTS I: NTS D WALL LO RTY LINE L REA WITH I AREA AS H AREA NCES (101 DISTANCES)	ATION DEGIPRO U U U U CATION DECATION RESPE IT REL 7) S (TABL	NA N/A N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS P, NS YES YES YES YES YES ONS (CHAP ONS (IF N	N/A N/A N/A N/A N/A PENINGS TABLE 705.8) I NO I N	N/A N/A N/A N/A O O O O O O O O O O O O O O O O O O O	PARTIAL ERTY LINES (70	PLANS (%) N/A N/A N/A N/A	OWN
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F. FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRED EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION LIFE SAFETY PLAN REQUIREME LIFE SAFETY PLAN SHEET #: - FIRE AND / OR SMOKE RATED ASSUMED AND REAL PROPE EXTERIOR WALL OPENING A OCCUPANT LOADS FOR EACH OCCUPANT LOADS FOR EACH COMMON PATH OF TRAVEL I	ERMITTING G CALCUL EET) MENTS I: NTS D WALL LO RTY LINE I REA WITH I AREA AS H AREA NCES (101 DISTANCES) CH EXIT D	ATION DEGIPHO U U U U CATIOI CATIOI ACATIOI CATIOI COCATIOI COCAT	NA N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS YES YES YES YES YES YES YES CT TO DIS ATES TO C LES 1006.2	N/A N/A N/A N/A N/A PENINGS TABLE 705.8) NO NO NO TER 7) OT ON THE SITE STANCE TO ASS DCCUPANT LOAI	N/A N/A N/A N/A N/A O O O O O O O O O O O O O O O O O O O	PARTIAL ERTY LINES (70 ON (1004.1.2)	PLANS (%) N/A N/A N/A N/A Solution in the second of t	
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F. FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRES EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION LIFE SAFETY PLAN REQUIREME LIFE SAFETY PLAN SHEET #: - FIRE AND / OR SMOKE RATE ASSUMED AND REAL PROPE EXTERIOR WALL OPENING A OCCUPANT LOADS FOR EACH OCCUPANT LOADS FOR EACH COMMON PATH OF TRAVEL I DEAD END LENGTHS (1020.4) CLEAR EXIT WIDTHS FOR EACH MAXIMUM CALCULATED OCCUPANT LOAD FOR	MENTS D WALL LO RTY LINE L REA WITH H AREA AS H AREA NCES (101 DISTANCES) CH EXIT D CUPANT LC COR EACH E	ATION DEGIPRO U U U U CATION CATION RESPE IT REL T) S (TABL OOR DAD CA EXIT DO	NA N/A N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS P, NS YES YES YES YES YES YES TO DIS ATES TO C PACITY EACOR	N/A N/A N/A N/A PENINGS TABLE 705.8) NO NO NO TER 7) OT ON THE SITE STANCE TO ASS DCCUPANT LOAD 2.1 & 1006.3.2 (1)	N/A N/A N/A N/A N/A O O O O O O O O O O O O O O O O O O O	PARTIAL ERTY LINES (70 ON (1004.1.2) MODATE BASE	PLANS (%) N/A N/A N/A N/A Solve of the second of the	TH (10
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRED EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION LIFE SAFETY PLAN REQUIREME LIFE SAFETY PLAN SHEET #: - FIRE AND / OR SMOKE RATE ASSUMED AND REAL PROPE EXTERIOR WALL OPENING A OCCUPANCY USE FOR EACH OCCUPANT LOADS FOR EACH OCCUPANT LOADS FOR EACH COMMON PATH OF TRAVEL I DEAD END LENGTHS (1020.4) CLEAR EXIT WIDTHS FOR EACH MAXIMUM CALCULATED OCCUPANT LOAD FOR EACH ACTUAL OCCUPANT LOAD FOR EACH PURPOSES OF OCCUPANCY	ERMITTING G CALCUL EET) MENTS I: NTS D WALL LO RTY LINE L REA WITH I AREA AS H AREA NCES (101 DISTANCES) CH EXIT D CUPANT LC OR EACH E AN INDICA SEPARATI	DEGIPRO U U U U U U U CATION	NA N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS P, NS YES YES YES YES YES YES YES TO DIS ATES TO C PACITY E. DOR WHERE FIRE	N/A N/A N/A N/A N/A PENINGS TABLE 705.8) NO NO NO TER 7) OT ON THE SITE STANCE TO ASS DCCUPANT LOAI 2.1 & 1006.3.2 (1) ACH EXIT DOOR RE-RATED FLOOR	N/A N/A N/A N/A N/A O O O O O O O O O O O O O O O O O O O	PARTIAL ERTY LINES (70 ON (1004.1.2) MODATE BASE	PLANS (%) N/A N/A N/A N/A Solve of the second of the	TH (10
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F. FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRES EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION LIFE SAFETY PLAN REQUIREME LIFE SAFETY PLAN SHEET #: - FIRE AND / OR SMOKE RATE ASSUMED AND REAL PROPE EXTERIOR WALL OPENING A OCCUPANT LOADS FOR EACH OCCUPANT LOADS FOR EACH COMMON PATH OF TRAVEL I DEAD END LENGTHS (1020.4) CLEAR EXIT WIDTHS FOR EACH MAXIMUM CALCULATED OCCUPANT LOAD FOR EACH ASEPARATE SCHEMATIC PL	ERMITTING G CALCUL EET) MENTS D WALL LO RTY LINE L REA WITH I AREA AS H AREA NCES (101 DISTANCES CH EXIT D CUPANT LC OR EXIT D	DEGINER PRODUCTION OF THE PROD	NA N/A N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS P, NS YES YES YES YES YES YES CONS (IF N COT TO DIS ATES TO CO PACITY E DOR WHERE FIR	N/A N/A N/A N/A N/A PENINGS TABLE 705.8) NO NO TER 7) OT ON THE SITE STANCE TO ASS DCCUPANT LOAD 2.1 & 1006.3.2 (1) ACH EXIT DOOR RE-RATED FLOOR	N/A N/A N/A N/A N/A O O O O O O O O O O O O O O O O O O O	PARTIAL ERTY LINES (70 ON (1004.1.2) MODATE BASE ND / OR ROOF	PLANS (%) N/A N/A N/A N/A Solve of the second of the	TH (10
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F. FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRED EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION LIFE SAFETY PLAN REQUIREME LIFE SAFETY PLAN SHEET #: - FIRE AND / OR SMOKE RATED ASSUMED AND REAL PROPE EXTERIOR WALL OPENING A OCCUPANCY USE FOR EACH OCCUPANT LOADS FOR EACH OCCUPANT LOADS FOR EACH COMMON PATH OF TRAVEL ID DEAD END LENGTHS (1020.4) CLEAR EXIT WIDTHS FOR EACH MAXIMUM CALCULATED OCCUPANCY LOCATION OF DOORS WITH IT LOCA	MENTS WENTS WENTS D WALL LO RTY LINE L REA WITH H AREA AS H AREA NCES (101 CUPANT LC CUPANT L	ATION DEGIPRO U U U U U CATION RESPE IT RELA T) S (TABL OOR DAD CA EXIT DC TING WION RDWAR EGRES MAGNE	NA N/A N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS P, NS YES YES YES YES YES YES YES YES YES YE	N/A N/A N/A N/A N/A PENINGS TABLE 705.8) NO NO NO TER 7) OT ON THE SITE STANCE TO ASS DCCUPANT LOAD 2.1 & 1006.3.2 (1) ACH EXIT DOOR RE-RATED FLOOI 10) AND THE AMOUNT SS LOCKS (1010)	N/A N/A N/A N/A N/A O O O O O O O O O O O O O O O O O O O	PARTIAL ERTY LINES (70 ON (1004.1.2) MODATE BASE ND / OR ROOF	PLANS (%) N/A N/A N/A N/A Solve of the second of the	TH (10
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION *INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F. FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRER EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION LIFE SAFETY PLAN REQUIREMENT LIFE SAFETY PLAN SHEET #: - FIRE AND / OR SMOKE RATE! ASSUMED AND REAL PROPE EXTERIOR WALL OPENING A OCCUPANCY USE FOR EACH OCCUPANT LOADS FOR EACH OCCUPANT LOADS FOR EACH COMMON PATH OF TRAVEL I DEAD END LENGTHS (1020.4) CLEAR EXIT WIDTHS FOR EACH MAXIMUM CALCULATED OCCUPANCY LOCATION OF DOORS WITH I LOCATION OF DOORS EQUIP	ERMITTING G CALCUL EET) MENTS I: NTS D WALL LO RTY LINE L REA WITH I AREA AS H AREA NCES (101 DISTANCES CH EXIT D CH E	DEGIPEO U U U U U U U U U U U U U U U U U U U	NA N/A N/A N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS P, NS YES YES YES YES YES YES TO O CONS (IF N COT TO DIS ATES TO O CONS THERE FIFE E (1010.1. S LOCKS TIC EGRE OPEN DE VS (1030)	N/A N/A N/A N/A N/A PENINGS TABLE 705.8) NO NO NO TER 7) OT ON THE SITE STANCE TO ASS DCCUPANT LOAD 2.1 & 1006.3.2 (1) ACH EXIT DOOR RE-RATED FLOOI 10) AND THE AMOUNT SS LOCKS (1010)	N/A N/A N/A N/A N/A O O O O O O O O O O O O O O O O O O O	PARTIAL ERTY LINES (70 ON (1004.1.2) MODATE BASE ND / OR ROOF	PLANS (%) N/A N/A N/A N/A Solve of the second of the	TH (10
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION INCIDENTAL USE SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F. FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRED EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION LIFE SAFETY PLAN REQUIREME! LIFE SAFETY PLAN SHEET #: - FIRE AND / OR SMOKE RATE: ASSUMED AND REAL PROPE EXTERIOR WALL OPENING A OCCUPANCY USE FOR EACH OCCUPANT LOADS FOR EACH OCCUPANT LOADS FOR EACH COMMON PATH OF TRAVEL I DEAD END LENGTHS (1020.4) CLEAR EXIT WIDTHS FOR EACH MAXIMUM CALCULATED OCCUPANCY LOCATION OF DOORS WITH I LOCATION OF DOORS WITH II LOCATION O	ERMITTING G CALCUL EET) MENTS I: NTS D WALL LO RTY LINE L REA WITH I AREA AS H AREA NCES (101 DISTANCES) CH EXIT D CUPANT LO CU	ATION DEGIPHO U U U U U U U CATIOI RESPE IT REL T) S (TABL OOR DAD CA EXIT DO TING W ION RDWAR EGRES MAGNE HOLD- IINDOW AREA	NA N/A N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS P, NS P, NS YES YES YES YES YES YES YES YES YES TO DISTANCE CT TO DISTANCE ATES TO C LES 1006.2 PACITY E. OOR /HERE FIRE E (1010.1. S LOCKS A TIC EGRE OPEN DE' /S (1030) (202)	N/A N/A N/A N/A N/A N/A PENINGS TABLE 705.8) NO	N/A N/A N/A N/A N/A O O O O O O O O O O O O O O O O O O O	PARTIAL ERTY LINES (70 ON (1004.1.2) MODATE BASE ND / OR ROOF	PLANS (%) N/A N/A N/A N/A STRUCTURE IS PRO	TH (10
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION *INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F. FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRER EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION LIFE SAFETY PLAN REQUIREMENT LIFE SAFETY PLAN SHEET #: - FIRE AND / OR SMOKE RATE! ASSUMED AND REAL PROPE EXTERIOR WALL OPENING A OCCUPANCY USE FOR EACH OCCUPANT LOADS FOR EACH OCCUPANT LOADS FOR EACH COMMON PATH OF TRAVEL I DEAD END LENGTHS (1020.4) CLEAR EXIT WIDTHS FOR EACH MAXIMUM CALCULATED OCCUPANCY LOCATION OF DOORS WITH I LOCATION OF DOORS EQUIP	ERMITTING G CALCUL EET) MENTS D WALL LO RETY LINE L REA WITH H AREA AS H AREA NCES (101 DISTANCES) CH EXIT D CUPANT LC OR EACH E AN INDICA SEPARCTI PANIC HAR DELAYED E ELECTROM PED WITH ESCAPE W EACH FIRE EACH SMO	DEGINER PRODUCTION OF THE PROD	NA N/A N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS P, NS P, NS YES YES YES YES YES YES YES YES YES YE	N/A N/A N/A N/A N/A PENINGS TABLE 705.8) NO NO NO TER 7) OT ON THE SITE STANCE TO ASS DCCUPANT LOAI 2.1 & 1006.3.2 (1) ACH EXIT DOOR RE-RATED FLOOR NO NO NO TO ON THE SITE STANCE TO ASS DCCUPANT LOAI 2.1 & 1006.3.2 (1) ACH EXIT DOOR NO NO NO NO NO NO NO NO NO	N/A N/A N/A N/A N/A N/A O O O O O O O O O O O O O O O O O O O	PARTIAL ERTY LINES (70 ON (1004.1.2) MODATE BASE ND / OR ROOF (1010.1.9.7)	PLANS (%) N/A N/A N/A N/A N/A STRUCTURE IS PRO 407.5)	TH (10
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION *INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (FIELD FROM PROPERTY LINES) 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRER EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION LIFE SAFETY PLAN REQUIREME LIFE SAFETY PLAN SHEET #: - FIRE AND / OR SMOKE RATE ASSUMED AND REAL PROPE EXTERIOR WALL OPENING A OCCUPANCY USE FOR EACH OCCUPANT LOADS FOR EACH OCCUPANT LOADS FOR EACH COMMON PATH OF TRAVEL I DEAD END LENGTHS (1020.4) CLEAR EXIT WIDTHS FOR EACH MAXIMUM CALCULATED OCCUPANT LOAD FOR EACH ACTUAL OCCUPANT LOAD FOR EACH ACTUAL OCCUPANT LOAD FOR EACH LOCATION OF DOORS WITH I	ERMITTING G CALCUL EET) MENTS D WALL LO RETY LINE L REA WITH H AREA AS H AREA NCES (101 DISTANCES) CH EXIT D CUPANT LC OR EACH E AN INDICA SEPARCTI PANIC HAR DELAYED E ELECTROM PED WITH ESCAPE W EACH FIRE EACH SMO	DEGINER PRODUCTION OF THE PROD	NA N/A N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS P, NS P, NS YES YES YES YES YES YES YES YES YES YE	N/A N/A N/A N/A N/A PENINGS TABLE 705.8) NO NO NO TER 7) OT ON THE SITE STANCE TO ASS DCCUPANT LOAI 2.1 & 1006.3.2 (1) ACH EXIT DOOR RE-RATED FLOOR NO NO NO TO ON THE SITE STANCE TO ASS DCCUPANT LOAI 2.1 & 1006.3.2 (1) ACH EXIT DOOR NO NO NO NO NO NO NO NO NO	N/A N/A N/A N/A N/A N/A O O O O O O O O O O O O O O O O O O O	PARTIAL ERTY LINES (70 ON (1004.1.2) MODATE BASE ND / OR ROOF (1010.1.9.7)	PLANS (%) N/A N/A N/A N/A N/A STRUCTURE IS PRO 407.5)	TH (10
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION *INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (FIELD FROM PROPERTY LINES) 10' < 15' 15' < 20' 20' < 25' 25' < 30' LIFE SAFETY SYSTEM REQUIRER EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION LIFE SAFETY PLAN REQUIREME LIFE SAFETY PLAN SHEET #: - FIRE AND / OR SMOKE RATE ASSUMED AND REAL PROPE EXTERIOR WALL OPENING A OCCUPANCY USE FOR EACH OCCUPANT LOADS FOR EACH OCCUPANT LOADS FOR EACH COMMON PATH OF TRAVEL I DEAD END LENGTHS (1020.4) CLEAR EXIT WIDTHS FOR EACH MAXIMUM CALCULATED OCCUPANT LOAD FOR EACH ACTUAL OCCUPANT LOAD FOR EACH ACTUAL OCCUPANT LOAD FOR EACH LOCATION OF DOORS WITH I	ERMITTING G CALCUL EET) MENTS D WALL LO RETY LINE L REA WITH H AREA AS H AREA NCES (101 DISTANCES) CH EXIT D CUPANT LC OR EACH E AN INDICA SEPARCTI PANIC HAR DELAYED E ELECTROM PED WITH ESCAPE W EACH FIRE EACH SMO	DEGINER PRODUCTION OF THE PROD	NA N/A N/A N/A N/A CTION S REE OF O TECTION (P, NS P, NS P, NS P, NS P, NS P, NS YES YES YES YES YES YES YES YES YES YE	N/A N/A N/A N/A N/A PENINGS TABLE 705.8) NO NO NO TER 7) OT ON THE SITE STANCE TO ASS DCCUPANT LOAI 2.1 & 1006.3.2 (1) ACH EXIT DOOR RE-RATED FLOOR NO NO NO TO ON THE SITE STANCE TO ASS DCCUPANT LOAI 2.1 & 1006.3.2 (1) ACH EXIT DOOR NO NO NO NO NO NO NO NO NO	N/A N/A N/A N/A N/A N/A O O O O O O O O O O O O O O O O O O O	PARTIAL ERTY LINES (70 ON (1004.1.2) MODATE BASE ND / OR ROOF (1010.1.9.7)	PLANS (%) N/A N/A N/A N/A N/A STRUCTURE IS PRO MOTOR AND	TH (10
SMOKE BARRIER SEPARATION SMOKE PARTITION TENANT / DWELLING UNIT / SLEEPING UNIT SEPARATION * INDICATE SECTION NUMBER PE PERCENTAGE OF WALL OPENIN FIRE SEPARATION DISTANCE (F FROM PROPERTY LINES 10' < 15' 15' < 20' 20' < 25' 25' < 30' ** INDICATE SECTION SYSTEM REQUIRED EMERGENCY LIGHTING: EXIT SIGNS: FIRE ALARM: SMOKE DETECTION SYSTEMS: CARBON MONOXIDE DETECTION ** LIFE SAFETY PLAN REQUIREMENT LIFE SAFETY PLAN SHEET #: - FIRE AND / OR SMOKE RATE! ASSUMED AND REAL PROPE EXTERIOR WALL OPENING A OCCUPANCY USE FOR EACH OCCUPANT LOADS FOR EACH OCCUPANT LOADS FOR EACH COMMON PATH OF TRAVEL I DEAD END LENGTHS (1020.4' CLEAR EXIT WIDTHS FOR EACH MAXIMUM CALCULATED OCCUPANCY LOCATION OF DOORS WITH I LOCATION OF DOORS WITH II LOCATION OF	ERMITTING G CALCUL EET) MENTS I: NTS D WALL LO REA WITH I AREA AS H AREA NCES (101 DISTANCES) CH EXIT D CUPANT LC OR EACH E AN INDICA SEPARCTI PANIC HAR DELAYED E ELECTROM PED WITH ESCAPE W EACH FIRE EACH SMO NS OR TAB	DEGINER PRODUCTION OF THE PROD	NA N/A N/A N/A N/A TION REE OF O TECTION (P, NS TES TES TO DIS TES TO DIS TIC EGRE OPEN DE' (S (1030) (202) MPARTME TYPE A L TYPE A L	N/A N/A N/A N/A N/A PENINGS TABLE 705.8) I NO I NO INO TER 7) OT ON THE SITE STANCE TO ASS DCCUPANT LOAD ACH EXIT DOOR RE-RATED FLOOD AND THE AMOUNT SS LOCKS (1010 VICES NT FOR OCCUPANT MAY HAVE BEEN INITS	N/A N/A N/A N/A N/A N/A O O O O O O O O O O O O O O O O O O O	PARTIAL ERTY LINES (70 ON (1004.1.2) MODATE BASE ND / OR ROOF (1010.1.9.7)	PLANS (%) N/A N/A N/A N/A N/A STRUCTURE IS PRO TOTAL ACCES	TH (10

ALLOWABLE

SHOWN ON PLANS

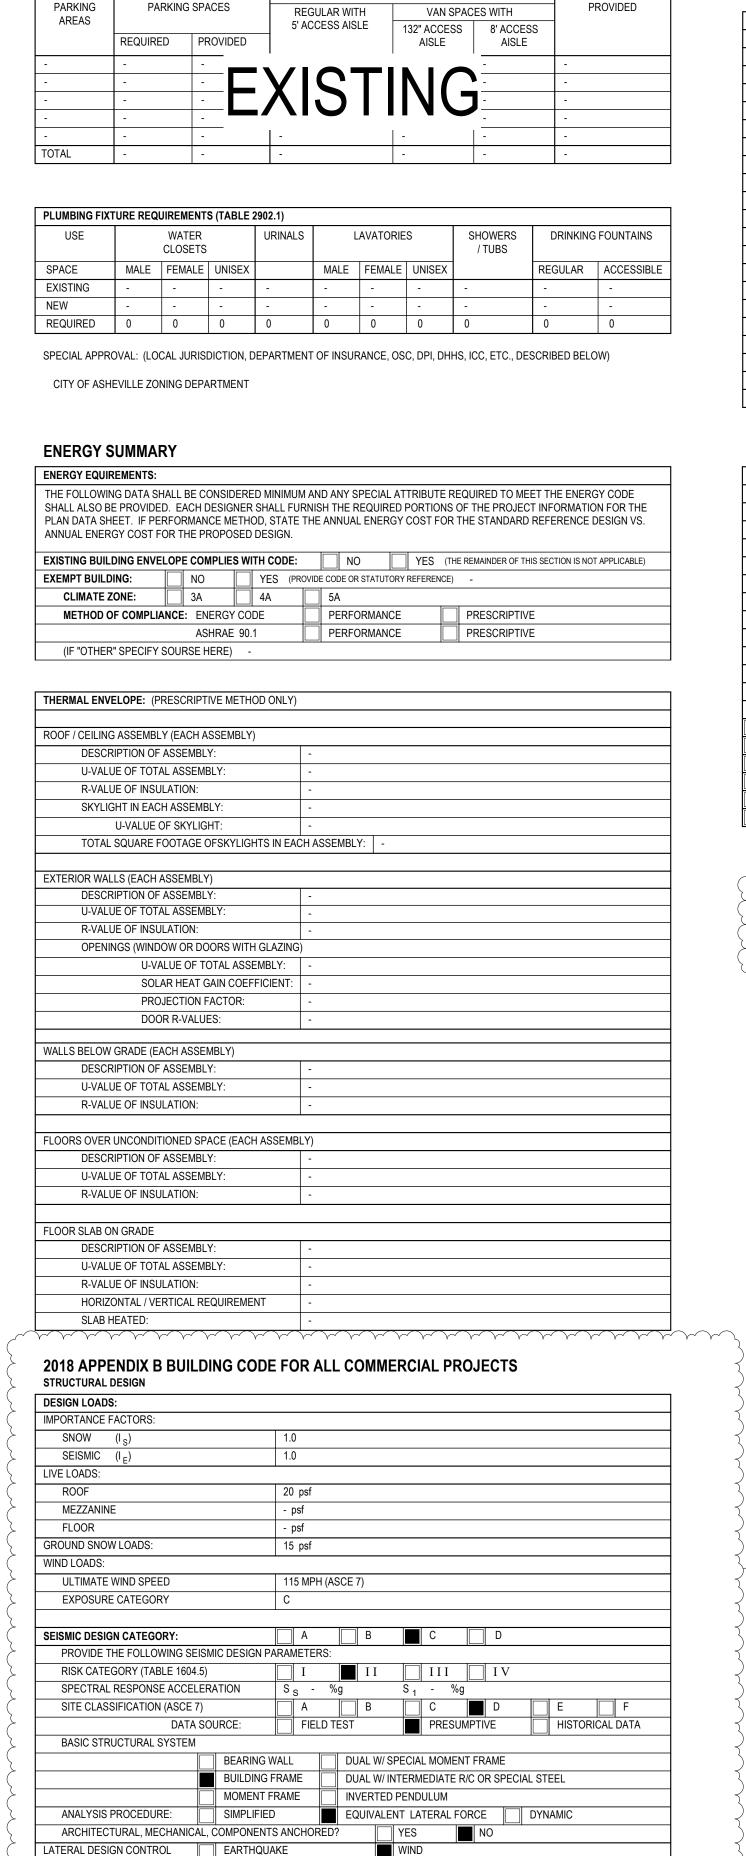

2000-psf


SOIL BEARING CAPACITIES

FIELD TEST (PROVIDE COPY OF TEST REPORT)

PRESUMPTIVE BEARING CAPACITY

PILE SIZE, TYPE AND CAPACITY

ACCESSIBLE SPACES PROVIDED

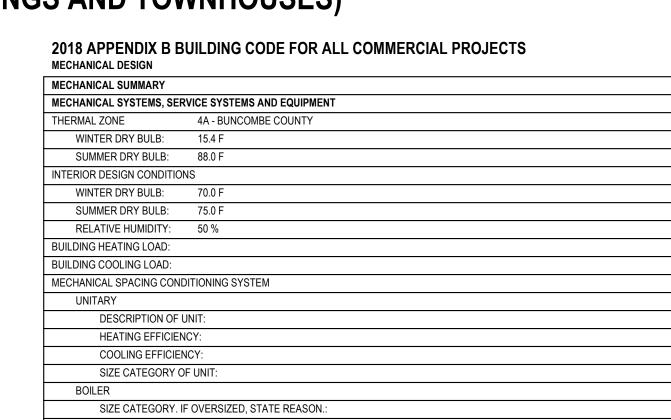


SIZE CATEGORY. IF OVERSIZED, STATE REASON.: N / A

LIST EQUIPMENT EFFICIENCIES SEE EQUIPMENT SCHEDULE

ELECTRICAL SUMMARY				
ELECTRICAL SYSTEM AND	QUII	PMENT		
METHOD OF COMPLIANCE:				
ENERGY CODE		PRESCRIPTIVE		PERFORMANCE
ASHRAE 90.1		PRESCRIPTIVE		PERFORMANCE
LIGHTING SCHEDULE (EAC	H FIX	TURE TYPE)		
LAMP TYPE REQUIRE	O IN F	IXTURE SEE FIXTU	RE	SCHEDULE
NUMBER OF LAMPS IN	I FIX	URE SEE FIXTU	RE	SCHEDULE
BALLAST TYPE USED	IN FIX	TURE SEE FIXTU	RE	SCHEDULE
NUMBER OF BALLAST	SINI	IXTURE SEE FIXTU	RE	SCHEDULE
TOTAL WATTAGE PER	FIXT	URE SEE FIXTU	RE	SCHEDULE
TOTAL INTERIOR WAT	TAGI	SPECIFIED VS. ALLOWED) (W	/HOLE BUILDING OR SPACE BY SPACE) TBD
TOTAL EXTERIOR WA	TTAG	E SPECIFIED VS. ALLOWE	D	TBD
ADDITIONAL EFFICIENCY P	ACK/	GE OPTIONS (WHEN USIN	IG 1	THE 2018 NCECC; NOT REQUIRED FOR ASHRAE 90.1)
C406.2 MORE EFFICIE	NT N	IECHANICAL EQUIPMENT I	PER	RFORMANCE
C406.3 REDUCED LIG	HTIN	G POWER DENSITY		
C406.4 ENHANCED D	GITA	L LIGHTING CONTROLS		
C406.5 ON-SITE RENE	WAB	LE ENERGY		
C406.6 DEDICATED O	UTDO	OOR AIR SYSTEM		
C406 7 REDUCED EN	RGY	USE IN SERVICE WATER	HFA	ATING

WALL CLOSEST TO EXISTING SCHOOL BULIDING REQUIRED TO BE 1 HOUR RATED. WALL IS IN COMPLIANCE WITH NCBC 722.6 - CALCULATED FIRE RESISTANCE.



CHARLESTON CHARLOTTE **JACKSONVILLE** NOVUSARCHITECTS.COM







No.	Description	Date
1	AHJ COMMENT	1.7.22
DRA	WN BY:	Author
CHE	CKED BY:	Checker
DATE	Ξ:	10/11/2021
	NOVUS JOB NU	MBER
	_	

SITE COORDINATION NOTES

- ERECT 4' TALL FENCES AROUND ALL STAGING AND WORK AREAS. TENAX SENTRY HD SAFETY FENCE, OR SIMILAR. G.C. WILL COORDINATE DAY TO DAY ACTIVITIES AND DELIVERIES WITH THE ASHEVILLE CITY SCHOOLS STAFF. SCHOOL
- OPERATIONS WILL ALWAYS TAKE PRECEDENCE OVER CONSTRUCTION PROVIDE NCDENR COMPLIANT SEDIMENT CONTROL MEASURES.

SCHEDULE AND PHASING NOTES

- SCHOOL YEAR CALENDAR SUBJECT TO CHANGE DUE TO INCLEMENT WEATHER. CONFIRM WITH ASHEVILLE CITY SCHOOLS
- DAILY SCHEDULE AT IRA B JONES ELEMENTARY (SUBJECT TO CHANGE DUE TO INCLEMENT WEATHER. CONFIRM WITH ASHEVILLE CITY SCHOOLS STAFF) STUDENT DROP OFF: 7:15AM - 8:15AM
- STUDENT PICKUP: 2:00PM 3:00PM NO CONSTRUCTION TRAFFIC DURING THESE TIMES

WIRE FENCING (18" TO 36")

EXISTING GRADE -

- WIRE FENGE


WIRE/PLASTIC -


TIES (3 MIN)

- TEACHER WORK DAYS NO STUDENTS (NOV-JAN)
- HOLIDAYS NO STAFF OR STUDENTS (NOV-JAN) NOV 11, 25-26, DEC 23-31, JAN 17

CONSTRUCTION AND EROSION CONTROL NOTES

- ACCESS TO THE DISTURBED AREA SHALL ONLY BE VIA THE CONSTRUCTION ENTRANCE LOCATED NORTHEAST OF THE SITE ON THE EXISTING ROAD AND SIDEWALK.
- STAGE AND STOCKPILE ALL EQUIPMENT IN THE FIELD EAST OF THE DISTURBED AREA/ SITE. PROTECT AND AVOID DAMAGE TO TREES WHILE EQUIPMENT IS IN USE. PLACE CONSTRUCTION FENCE AROUND THE TREES
- PLACE CONSTRUCTION FENCE AROUND THE LIMITS OF THE DISTURBED AREA, INCLUDING STOCKPILE AND STAGING AREA. PLACE SILT FENCE ALONG SOUTHERN LIMITS OF DISTURBED AREA TO PREVENT CONTAMINATED WATER FROM LEAVING SITE UNTREATED. SEE DETAIL 7.01 ON SHEET A301.6. CHECK AND CLEAN OUT SEDIMENT FENCE AT LEAST ONCE WEEKLY
- CONFIRM W/ ASHEVILLE CITY SCHOOLS LOCATION ON SITE TO WASTE DIRT FROM EXCAVATION. THE SITE WILL BALANCE

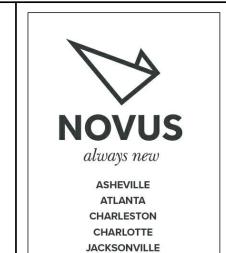




NOVUSARCHITECTS.COM





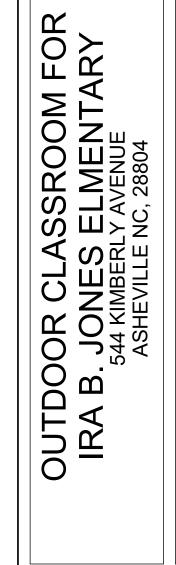

VARIABLE AS DIRECTED BY THE ENGINEER
WIRE FENCE. 14 GA.
MIN/6" OPENING MAX

FRONT VIEW

MAXIMUM SLOPE LENGTH AND SLOPE WHICH SEDIMENT FENCE IS APPLICABLE*

SLOPE | SLOPE LENGTH (FT) | MAXIMUM AREA (SQ FT)

* TABLE INFORMATION TAKEN FROM THE NORTH CAROLINA EROSION AND SEDIMENT CONTROL PLANNING AND DESIGN MANUAL, DETAIL 6.62A.

