



 \sim

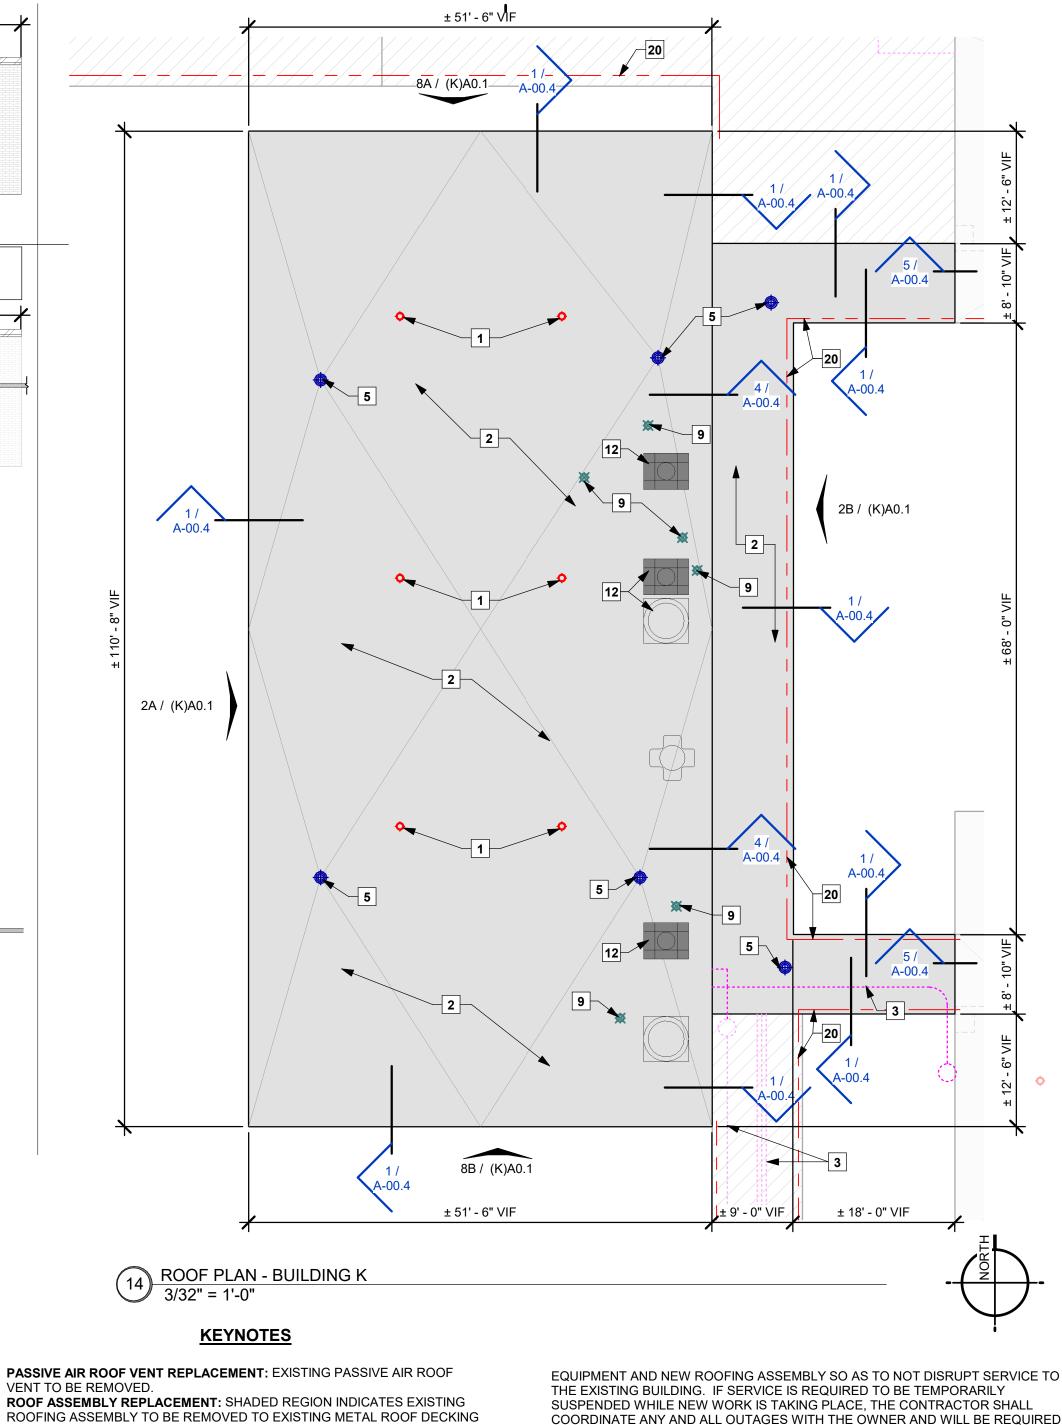


PASSIVE AIR ROOF VENT REPLACEMENT: EXISTING PASSIVE AIR ROOF VENT TO BE REMOVED.


- ROOFING ASSEMBLY TO BE REMOVED TO EXISTING METAL ROOF DECKING SUBSTRATE BELOW, AND NEW ROOFING INSTALLED. ALL DEBRIS IS TO BE REMOVED FROM THE SITE. SEE SPECIFICATIONS FOR EXTENT OF DEMOLITION AND SITE CONSTRAINTS.
- **RIGID CONDUIT REPAIR (VIF):** INDICATES EXISTING RIGID CONDUIT RUNS EXPOSED ON EXISTING ROOF, CONTRACTOR SHALL MAKE VISUAL INSPECTIONS ON SITE TO VERIFY THE EXTENT OF WORK WHICH BE REQUIRED TO MOVE AND RELOCATE THESE CONDUIT RUNS DURING THE PROCESS OF RE-ROOFING AND TO ENSURE THAT THE NEW ROOF SLOPES ARE INTEGRATED AND ACCOUNTED FOR WHERE EXTENSIONS OF THESE CONDUITS AND WIRING IS REQUIRED.
- ROOF CURB REPLACEMENT: ALL EXISTING ROOF CURBS TO BE REMOVED AND REPLACED IN AREAS BEING RE-ROOFED. ROOF DRAIN REPAIR (VIF): APPROXIMATE LOCATION OF EXISTING ROOF
- DRAIN, CONTRACTOR SHALL VISUALLY INSPECT ALL CONDITIONS REPLACE DAMAGED COMPONENTS AND ADJUST TO NEW ROOF SLOPE. FLASHING VIF: SEE DETAILS FOR FLASHING AND COUNTERFLASHING
- WHICH IS TO TIE INTO THE EXISTING BUILDING ENVELOPE. VERIFY CLEARANCES AND LOCATIONS FOR INSTALLATION OF ALL FLASHING AND TERMINATION BARS AS DETAILED.
- RUNNER CURB INSTALLMENT: PROVIDE NEW "RUNNER CURBS" FOR SUPPORT OF ALL HARD PIPING WHICH IS TO REMAIN ON ROOF AFTER NEW INSTALLATION. SPACE CURBS AS REQUIRED SO CONDUIT AND PIPING DOES NOT SAG BETWEEN THESE LOCATIONS. INSTALL AS DETAILED. ROOF EXPANSION JOINT REPAIR (VIF): INDICATES APPROXIMATE AREA AND LOCATION OF ROOF EXPANSION JOINT. CONTRACTOR SHALL VISUALLY INSPECT THE EXISTING CONDITIONS AT THE SITE AND PROVIDE A NEW EXPANSION JOINT AS DETAILED WITHIN THESE DOCUMENTS. THE INSTALLER SHOULD ASSUME THAT ALL EXISTING WOOD BLOCKING SHALL BE REPLACED WITH NEW TREATED WOOD BLOCKING AS PER DETAILS. PROVIDE NEW CANT STRIP, FLASHING, PRE-FINISHED EXPANSION JOINT
- COVER, VINYL BELLOWS, AND BASE FLASHING AS DETAILED. VERIFY EXACT ROUTING AND AREA WHERE THIS EJ IS TO BE REMOVED AND REPLACED, VERIFY ALL EXISTING CONDITIONS, ESPECIALLY ANY PIPING, AND CONDUIT WHICH MIGHT INTERSECT OR CROSS OVER THIS JOINT.
- PLUMBING VENT REPLACEMENT (VIF): CONTRACTOR SHALL VISUALLY INSPECT ALL EXISTING ROOFING PLUMBING VENTS WHICH ARE TO REMAIN. CONFIRM HEIGHTS OF VENT PIPING AND EXTEND WHERE REQUIRED DUE TO INSTALLATION OF NEW TAPERED INSULATION. EXTEND ALL VENTS AS REQUIRED TO MAINTAIN VERTICAL CLEARANCES CALLED FOR ON EACH RELATED CONSTRUCTION DETAIL. REPLACE ALL LEAD VENT & PIPE FLASHING. TYPICAL ALL LOCATIONS. FLASHING REPLACEMENT: REMOVE AND REPLACE FLASHING, COUNTER-
- FLASHING AND PRE-FINISHED METAL FASCIA FLASHING AS DETAILED.
- SKYLIGHT REPLACEMENT: INSTALL NEW ALUMINUM SKYLIGHT GUARD TO MATCH EXISTING.
- HVAC REPAIR (VIF): INDICATES EXISTING HVAC EQUIPMENT AT EXISTING ROOF WHICH IS TO REMAIN. COORDINATE WORK INVOLVED WITH THIS

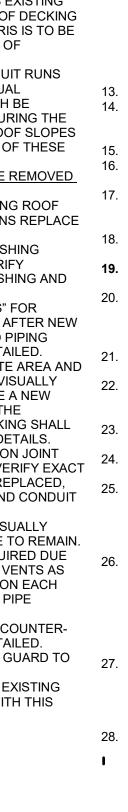


COORDINATE ANY AND ALL OUTAGES WITH THE OWNER AND WILL BE REQUIRED TO ONLY PERFORM THIS WORK AT TIMES WHEN SUSPENSION OF THIS SERVICE MINIMALLY AFFECTS THE OWNERS USE OF THE BUILDING. IF THE SERVICE CANNOT BE SUSPENDED DURING OWNER'S OPERATING HOURS, WORK MAY HAVE TO BE PERFORMED AFTER HOURS, OR ON WEEKENDS.

- **SATELLITE INSTALLATION:** SEE DETAILS FOR SATELLITE MOUNTING UNIT. "A" METAL PANEL REPLACEMENT: METAL WALL PANEL "E" - REMOVE AND REPLACE DAMAGED/MISSING METAL WALL PANEL AS SPECIFIED. SEE BUILDING ELEVATIONS. SIGNAGE INSTALLATION: INSTALL MISSING LETTERING TO MATCH EXISTING.
- ROOF ACCESSORY REPLACEMENT: REPLACE DAMAGED ROOF ACCESSORIES. MATCH EXISTING TYPE, MATERIAL, AND STYLE. DOWNSPOUT AND GUTTER CLEANING: DOWNSPOUT/COLLECTOR LOCATIONS, SEE ELEVATIONS. CONTRACTOR IS TO REMOVE ALL DEBRIS FROM GUTTERS AND
- DOWN SPOUTS. SATELLITE REMOVAL: REMOVE ALL SATELLITE COMPONENTS. THESE ARE NO LONGER IN USE.
- COPING: SEE ROOFING SHEETS FOR COPING, OVERHANG & ROOFING SCOPES -
- TEMPORARY CHAIN LINK FENCING PROVIDE 6' TEMPORARY CHAIN LINK FENCING 20. TO PROTECT STUDENT TRAFFIC DURING CONSTRUCTION. PROVIDE ACCESS TO THE GREATEST EXTENT POSSIBLE. COORDINATE WITH PHASING AND SCHOOL PRINCIPAL
- WIND TURBINE REPLACEMENT: REMOVE AND REPLACE WIND TURBINE TO MATCH EXISTING. PAINTING EXTERIOR: CLEAN, PREP & RE-PAINT WALLS AND ARTWORK TO COVER SCUFFS AND DAMAGE FROM STORM DEBRIS. COLOR TO MATCH EXISTING AS
- APPROVED BY ARCHITECT. GLASS REPLACEMENT: REMOVE AND REPLACE DAMAGED GLASS (OR PLYWOOD 23. WHERE APPLICABLE) TO MATCH EXISTING. PROVIDE CAULKING AND GASKETING. STUCCO SOFFIT REPLACEMENT: SOFFIT REMOVED BY OTHERS (HAZARDOUS
- MATERIAL). COORDINATE AND INSTALL NEW STUCCO SOFFIT. COORDINATE REMOVAL OF AGGREGATE PANELS (HAZARDOUS MATERIAL) WITH ABATEMENT SCOPE AND ABATEMENT CONTRACTOR. COORDINATE AND INSTALL NEW GFRC FACADE PANELS AS SPECIFIED. REMOVE AND REPLACE DAMAGED WALL FRAMING - SEE STRUCTURAL AND WALL SECTIONS. SALVAGE AND REINSTALL MEP COMPONENTS AT SAME LOCATIONS - COORDINATE WITH MEP.
- DOWNSPOUT AND GUTTER REPLACEMENT: REMOVE REMAINING ATTACHMENTS AND COMPONENTS OF DOWNSPOUT, GUTTER AND CONDUCTOR HEADS AND INSTALL NEW TO MATCH EXISTING COLOR, DIMENSION, GAUGE, AND MATERIAL. GROUT HOLES AT OLD STRAPS PRIOR TO NEW INSTALLATION & ATTACH AT INTERVALS EQUAL TO EXISTING SPACING. SALVAGE AND PREP REMAINING COMPONENTS FOR NEW INSTALLATION. CONTRACTOR IS TO REMOVE ALL DEBRIS ROM GUTTERS AND DOWN SPOUTS
- BRICK REPAIR: REMOVE AND REPLACE BRICK FACADE AS INDICATED. DISPOSE OF OLD BRICK, MATCH NEW BRICK AND MORTAR TO EXISTING AS APPROVED BY ARCHITECT. PRESERVE SUBSTRATE. REMOVE OLD BRICK TIES AND WATER PROOFING, INSTALL NEW WATERPROOFING AND BRICK TIES AT A MIN. OF 24" O.C. VERTICAL AND HORIZONTAL PLASTER SOFFIT REPLACEMENT: REMOVE REMAINING VINYL SOFFIT AND
- REPLACE TO MATCH EXISTING PRESERVE LIGHT & REINSTALL AS NECESSARY.

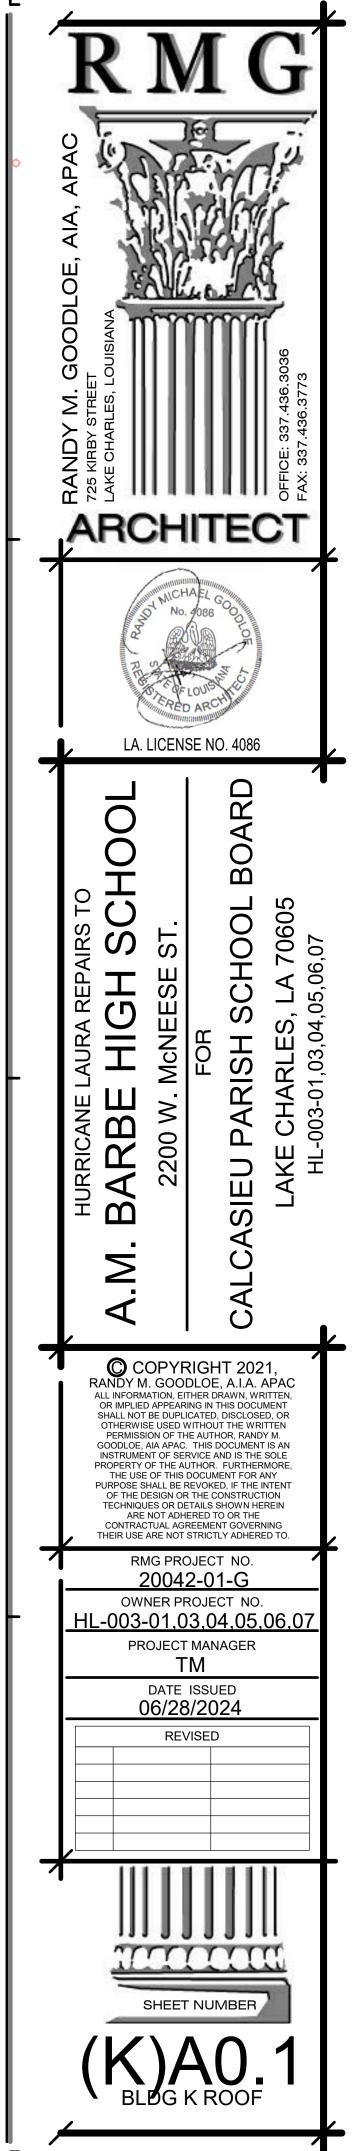

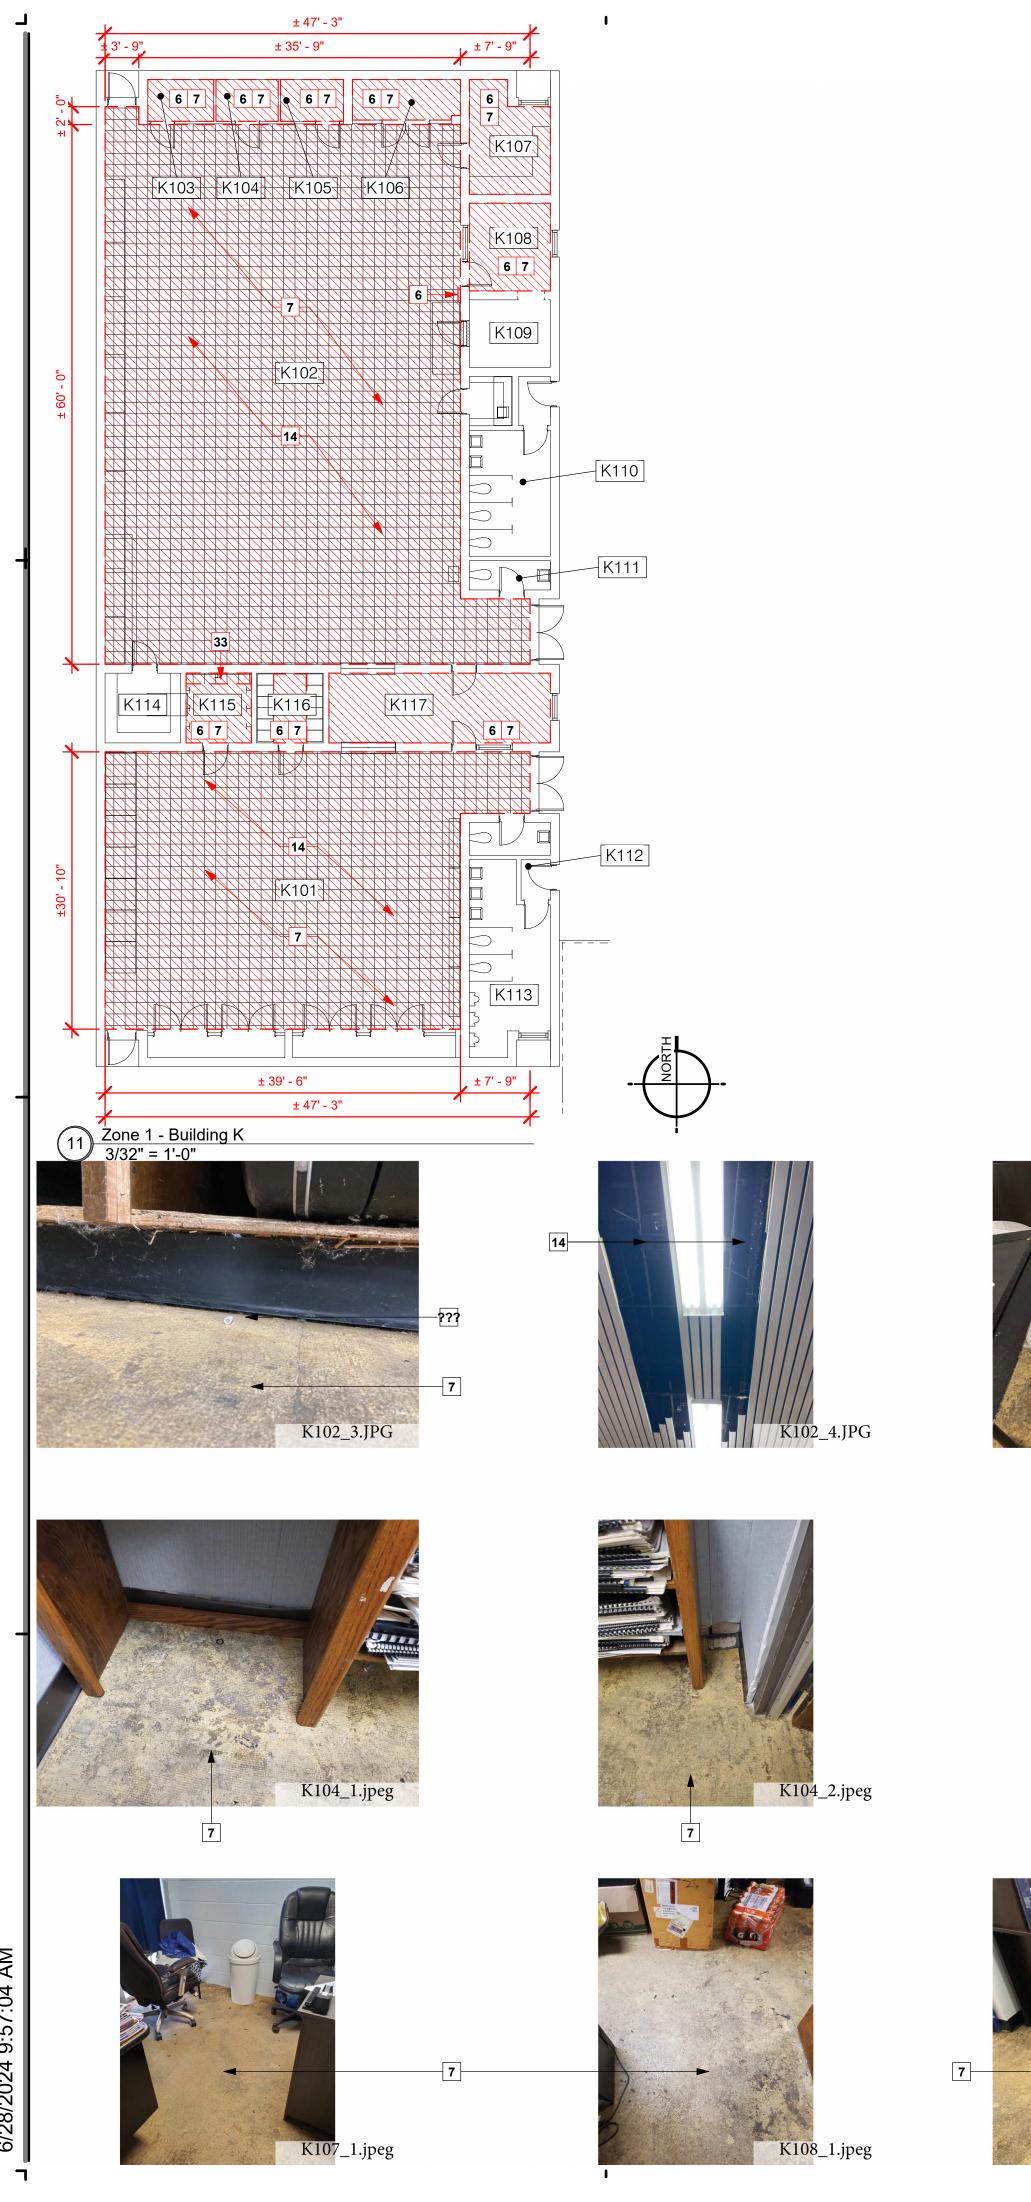

AM 9:57:04 '2024 6/28/

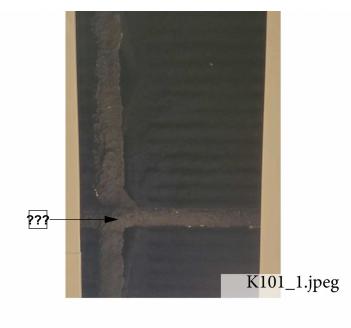






K102_7.JPG

7

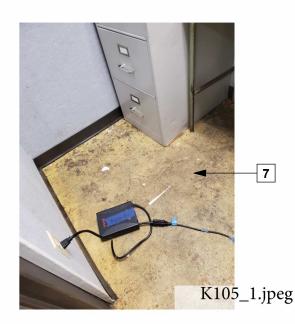



7 l.jpeg



l.jpeg

<u>R0</u>	OMS -BUI
ROOM	
NUMBER	Area
K101	1393 SF
K102	2497 SF
K103	33 SF
K104	31 SF
K105	32 SF
K106	58 SF
K107	94 SF
K108	83 SF
K115	57 SF
K116	55 SF
K117	190 SF


APPROXIMATE TO BE USED AS GUIDELINES ONLY. CONTRACTOR IS RESPONSIBLE FOR ALL FINAL MEASUREMENTS.

KEYNOTES

- SUSPENDED ACOUSTIC CEILING REPLACEMENT: REMOVE AND REPLACE DAMAGED CEILING GRID AND CEILING TILE AS SPECIFIED. CEILING GRID: REMOVE AND REPLACE DAMAGED CEILING GRID. MATCH
- EXISTING. SEE UNIT PRICE NO. 5
- VCT FLOORING REPAIRS: REMOVE AND REPLACE VCT FLOORING AS SPECIFIED IN AREAS WHERE INDICATED. SEE UNIT PRICE NO. 3. WINDOW REPAIRS: REPLACE BROKEN WINDOW PANES, BLOCKS, AND GASKETS
- TO MATCH EXISTING. ALL SEALANTS SHALL BE REMOVED AND REPLACED AS SPECIFIED TO ENSURE WEATHER TIGHT SEAL. SEE ELEVATIONS. STRUCTURAL CLAY BLOCK: GLAZED STRUCTURAL CLAY BLOCK TO BE
- REMOVED AND REPLACED AS SPECIFIED TO MATCH EXISTING. CLEAN ALL CHALKING RESIDUE FROM EFFERVESCENCE. VINYL BASE REPLACEMENT: REPLACE DAMAGED OR MISSING BASE AS
- SPECIFIED TO MATCH EXISTING. SEE UNIT PRICE NO. 4
- CARPET REPAIRS: DAMAGED CARPET HAS BEEN REMOVED. CLEAN FLOOR AND INSTALL NEW CARPET TILE AS SPECIFIED. PAINTING: WALL SURFACE IS TO BE SANDED, PREPARED, AND REPAINT TO
- MATCH EXISTING CORNER TO CORNER. WATER STAINED WALL FROM ROOF LOSS. PAINTED CEILING STRUCTURE: CEILING INCLUDING METAL TRUSSES ARE TO
- BE CLEANED, PREPPED, AND REPAINTED END TO END TO MATCH EXISTING COLOR. VCT FLOORING CLEANING: CLEAN WATER STAINS FROM VCT FLOORING TO 10.
- REMOVE ANY DISCOLORATION WHERE INDICATED. MOP AND WAX ALL VCT FLOORING AT THE END OF CONSTRUCTION. SKYLIGHT REPAIRS: REMOVE AND REPLACE SKYLIGHT TO MATCH EXISTING. 11.
- TERRAZZO FLOORING CLEANING: CLEAN AND POLISH EXISTING TERRAZZO 12. FLOORING. REFER TO ROOM SCHEDULE FOR CLARITY. 13. CEILING TILE REPLACEMENT: REMOVE AND REPLACE DAMAGED OR MISSING
- ACOUSTIC CEILING TILE WITH NEW CEILING TILE AS SPECIFIED IN AREAS INDICATED. MATCH EXISTING TYPE AND SIZE. SEE UNIT PRICE NO. 1. INSTALL R-30 BATT INSULATION OVER TILE. SEE UNIT PRICE NO. 2 NOT USED. 14.
- EXTERIOR WINDOWS AND DOORS: CAULK AND RESEAL PERIMETER OF 15.
- EXISTING WINDOWS AND DOORS. CMU REPAIR: RE-POINT DAMAGED CMU JOINTS AS SHOWN. PAINT WALL FROM 16. END TO END IN COLOR TO MATCH EXISTING AS SPECIFIED. SEE PHOTOS.
- BRICK REPAIR: CAULK CRACKED AREAS AND REPAINT. 17. LOCKERS: REPLACE DAMAGED UNITS AS SHOWN. MATCH EXISTING STYLE, 18.
- SIZE AND COLORS. BRICK WALLS: CLEAN ALL WATER STAINS FROM ENTIRE BRICK WALL 19. SHELVING REPLACEMENT: REMOVE AND REPLACE DAMAGED SHELVING UNITS 20.
- WITH <u>GLASS DOORS</u>. MATCH EXISTING MATERIALS, FINISHES AND CONSTRUCTION STYLE. 21. BASE CABINET: REMOVE AND REPLACE DAMAGED BASE CABINET. MATCH
- EXISTING STYLE, SIZE, AND CONSTRUCTION. SALVAGE AND REINSTALL COUNTERTOP. 22. SECTIONAL DOOR: REMOVE AND REPLACE OVERHEAD SECETIONAL DOOR AS
- SPECIFIED. CONTRACTOR TO PROVIDE ANY ADDITIONAL SUPPORT REQUIRED BY THE MANUFACTURER. 23. **GYPSUM BOARD:** REMOVE AND REPLACE DAMAGED GYPSUM BOARD TO
- NEAREST FRAMING MEMBER. FINISH AND RE-PAINT WALL CORNER TO CORNER.
- 24. PREFINISHED GYPSUM BOARD WITH VINYL WALL COVER AND CORNER TRIM: REMOVE AND REPLACE DAMAGED VINYL COVERED GYPSUM BOARD FROM FLOOR TO CEILING WHERE INDICATED ON FLOOR PLAN. STOREFRONT WINDOW: REMOVE AND REPLACE STOREFRONT WINDOW AS 25.
- SPECIFIED. STUCCO SOFFIT: REMOVE & REPLACE STUCCO SOFFIT. COORDINATE WITH 26. ABATEMENT SCOPE & ABATEMENT CONTRACTOR TO ENSURE WEATHER-
- TIGHTNESS AND PHASING COORDINATION. SEE WALL SECTIONS & DETAILS. GYPSUM CEILING REPAIRS: REMOVE AND REPLACE DAMAGED GYPSUM 27. CEILING BOARD TO NEAREST FRAMING MEMBER WHERE INDICATED, FINISH TO MATCH EXISTING AS SPECIFIED.
- METAL ROOF PANEL REPAIRS: REMOVE AND REPLACE DEFORMED OR MISSING 28. METAL ROOF PANELS TO MATCH EXISTING.
- CONCRETE FLOOR CLEANING: CLEAN AND RESEAL FLOOR AS SPECIFIED. 29. BASE CABINET: REMOVE AND REPLACE DAMAGED BASE CABINET. MATCH EXISTING STYLE, SIZE, AND CONSTRUCTION. SALVAGE AND REINSTALL COUNTERTOP. PROTECT ALL MECHANICAL CONNECTIONS. TILE CLEANING: CLEAN STAINS FROM WALL TILE TO REMOVE ANY 31.
- DISCOLORATION WHERE INDICATED. CLEAN/REPAINT MASONRY WALL: MECHANICALLY REMOVE ALL LOOSE OR 32. PEELING PAINT AND ALL CHALKING RESIDUE FROM EFFERVESCENCE FROM CORNER TO CORNER. PERFORM REQUIRED MOISTURE TESTING PRIOR TO REPAINTING WALL AS SPECIFIED.
- **33. PLASTER CEILING REPAIRS**: REMOVED AND REPLACE DAMAGED PLASTER CEILING WHERE INDICATED AS SPECIFIED, PAINT IN COLOR TO MATCH EXISTING.
- **MEP DAMAGES:** SEE MECHANICAL, PLUMBING AND ELECTRICAL PLANS. 34. FURNITURE SETTING AND RESETING: RELOCATE ALL EXISTING FURNITURE TO 35 TEMPORARY ROOM IN MODULAR BUILDINGS WHILE EXISTING SPACE IS BEING REPAIRED. REINSTALL AND RESET FURNITURE ONCE REPAIRS ARE COMPLETE. SEE PHASING PLAN.
- SUSPENDED CEILING INSULATION: INSTALL R-19 BATT INSULATION AS 36. SPECIFIED ABOVE PREVIOUSLY INSTALLED SUSPENDED CEILING TILE. SEE UNIT PRICE NO. 2. 37.
- BRICK WALL REPLACEMENT: REMOVE AND REPLACE BRICK WALL AS INDICATED. DISPOSE OF OLD BRICK, MATCH NEW BRICK AND MORTAR TO EXISTING AS APPROVED BY ARCHITECT, SEE STRUCTURAL. BUILDING TO REMAIN WEATHERPROOF AND CONDITIONED DURING REPAIRS. DOOR REPAIR: CLEAN, PREP AND RE-PAINT DOOR FRAME - SEE DOOR 38. SCHEDULE.
- CORRIDOR WALL REPAIR: REMOVE DAMAGED STOREFRONT WINDOW AND 39. EXISTING 3/4" PLYWOOD SHEATHING BELOW WINDOW. INSTALL NEW WINDOW PER SCHEDULE AND NEW 3/4" PLYWOOD SHEATHING. PAINT AS SPECIFIED, IN COLOR AS SELECTED. SEE DETAILS.
- GLAZING REPAIR: REMOVE AND REPLACE BROKEN GLASS. MATCH EXISTING 40. TINT. PROVIDE SAFETY GLASS AS REQUIRED. DOOR REPAIR: REMOVE AND REPLACE EXISTING LEFT DOOR LEAF. PROVIDE 41
- AN INSULATED HOLLOW METAL DOOR WITH VISION PANEL TO MATCH RIGHT DOOR LEAF. REINSTALL EXISTING DOOR HARDWARE. PAINT AS DIRECTED.




Perimeter
170' - 11"
225' - 8"
23' - 9"
22' - 11"
23' - 1"
34' - 6"
42' - 7"
36' - 6"
30' - 3"
29' - 9"
64' - 4"






- CEILING REPAIR REQUIRED

- FLOORING REPAIR REQUIRED. SEE ROOM SCHEDULE. — — — - WALL/BASE REPAIR REQUIRED. SEE ROOM SCHEDULE. - MILLWORK REPAIR REQUIRED. SEE ROOM SCHEDULE.
- SITE KEYPLAN N.T.S. Μ M1 С Ν

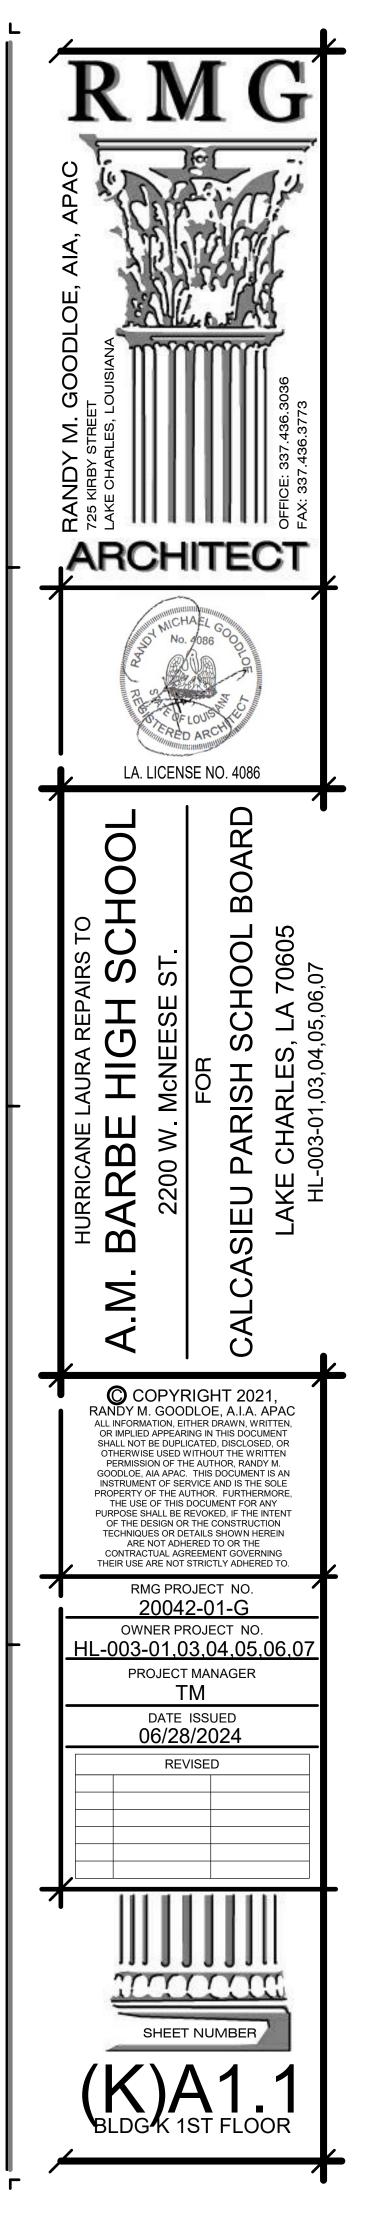

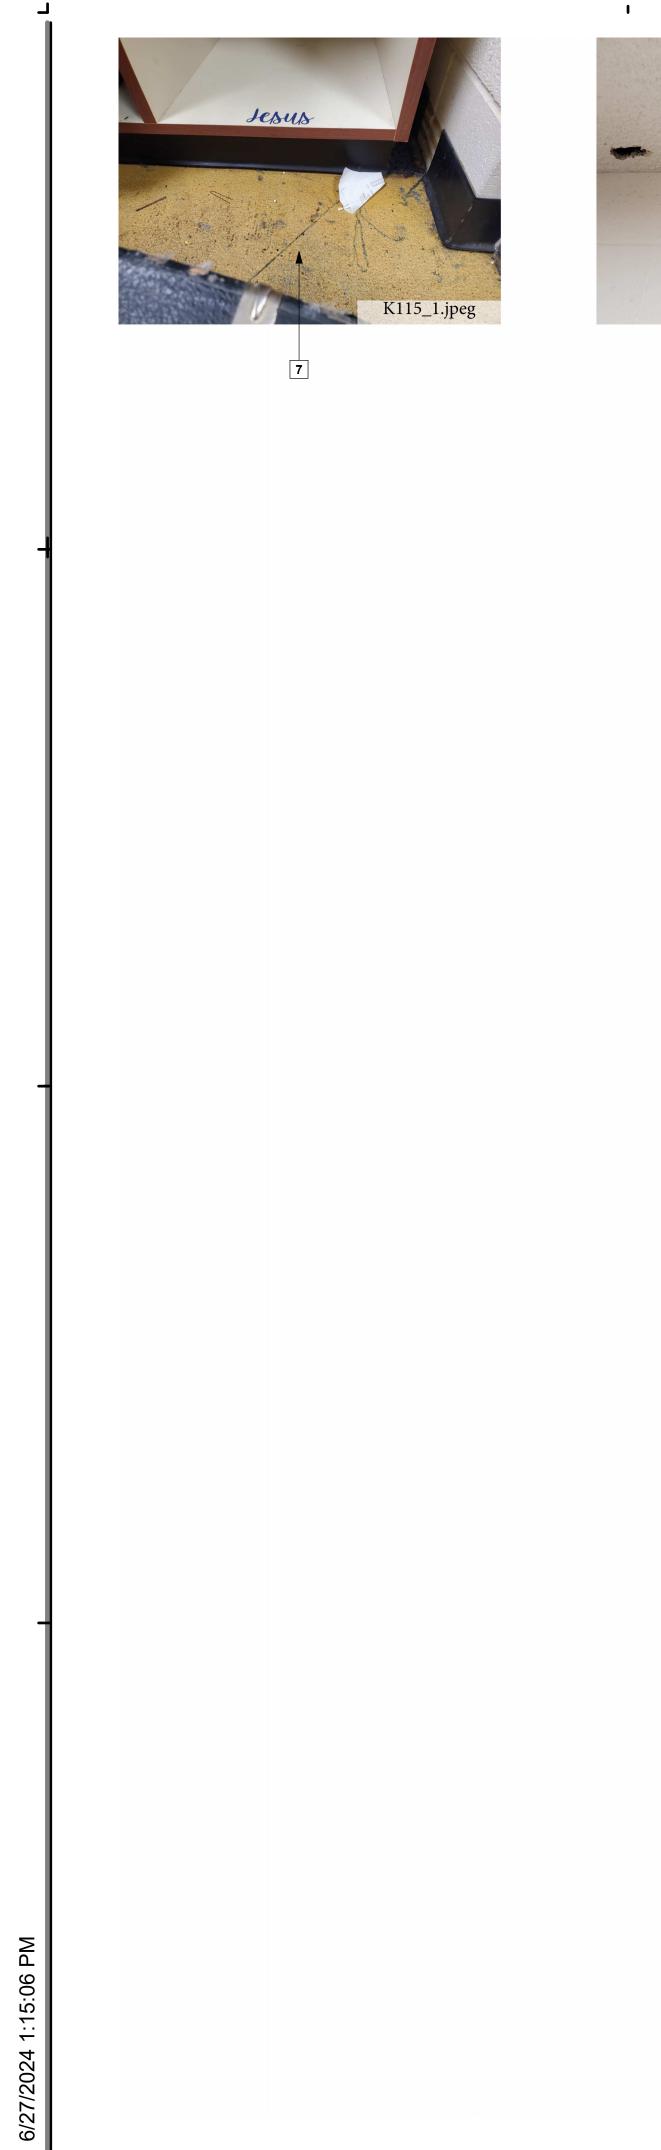





- 7

I

I

K116_2.JPG


I


I





1

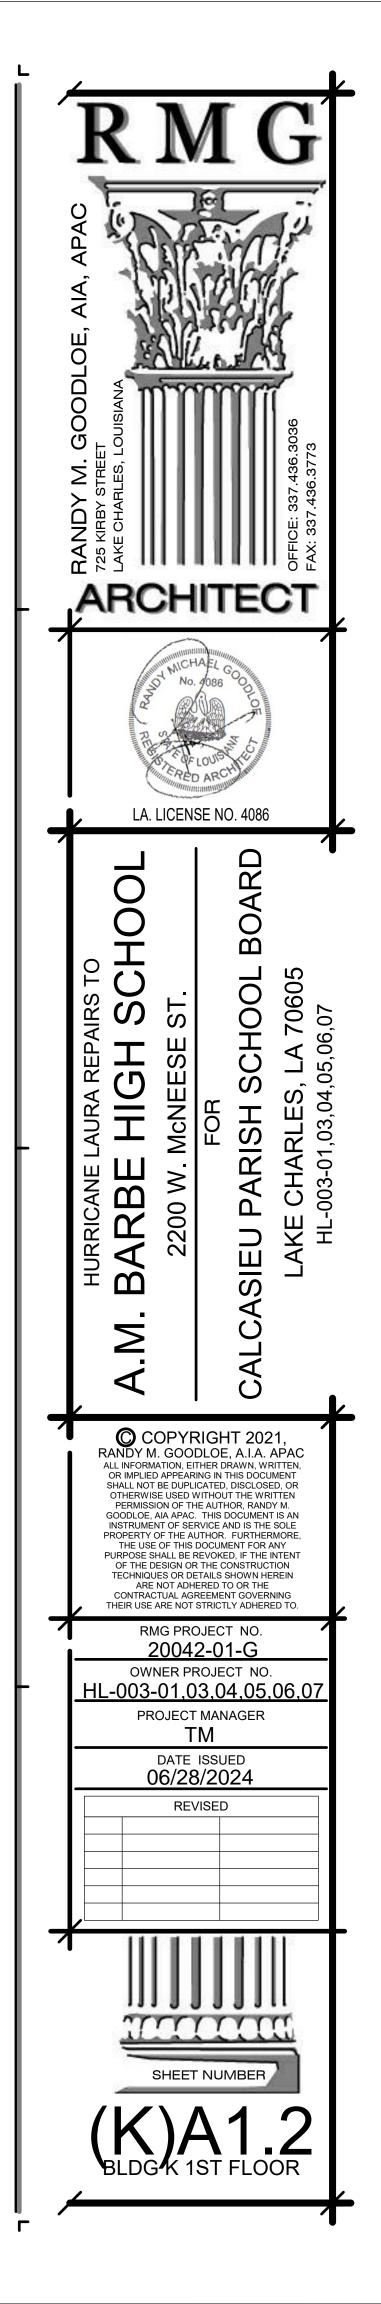


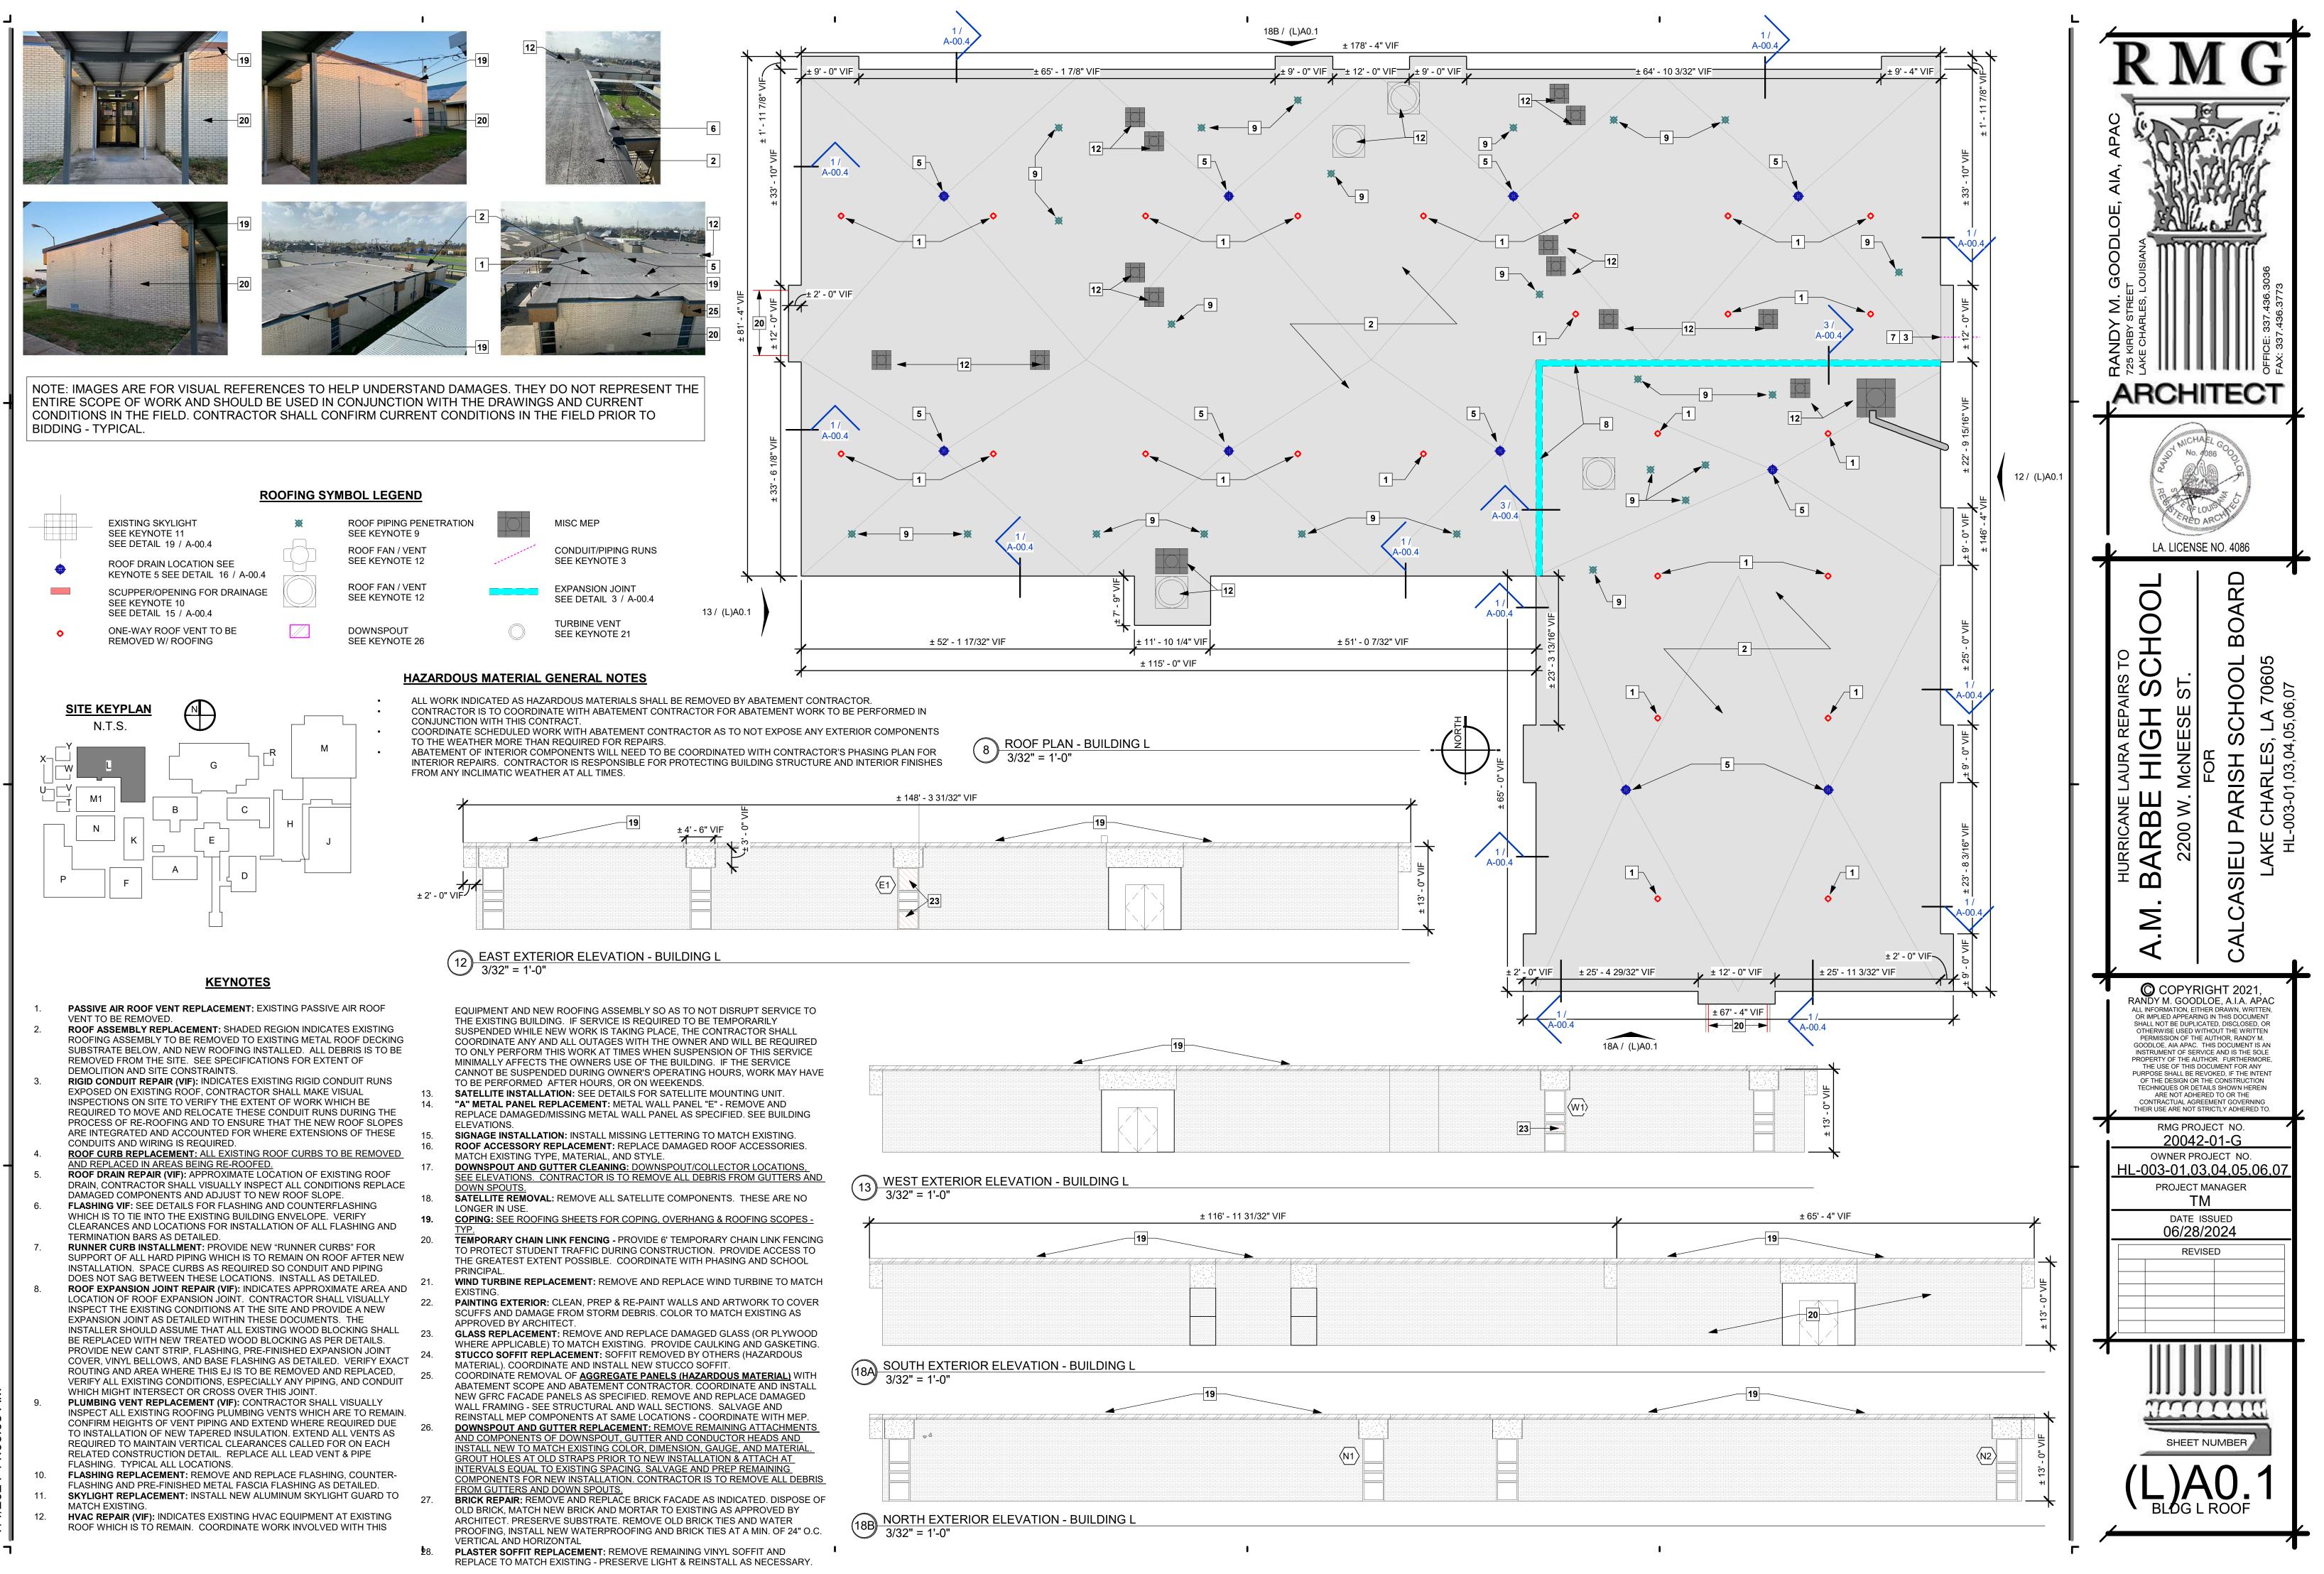

N

ED. DISFUSE OF	
ROVED BY	
) WATER	NORTH EXTER
MIN. OF 24" O.C.	18B <u>NORTH EXTER</u> 3/32" = 1'-0"
	-

		<u> </u>	
SOUTH EXTERIOR ELE	/ALION - BUILDING I		
3/32" = 1'-0"			
		19	
		19	
3/32" = 1'-0"			
3/32" = 1'-0"			
3/32" = 1'-0"			
3/32" = 1'-0"			

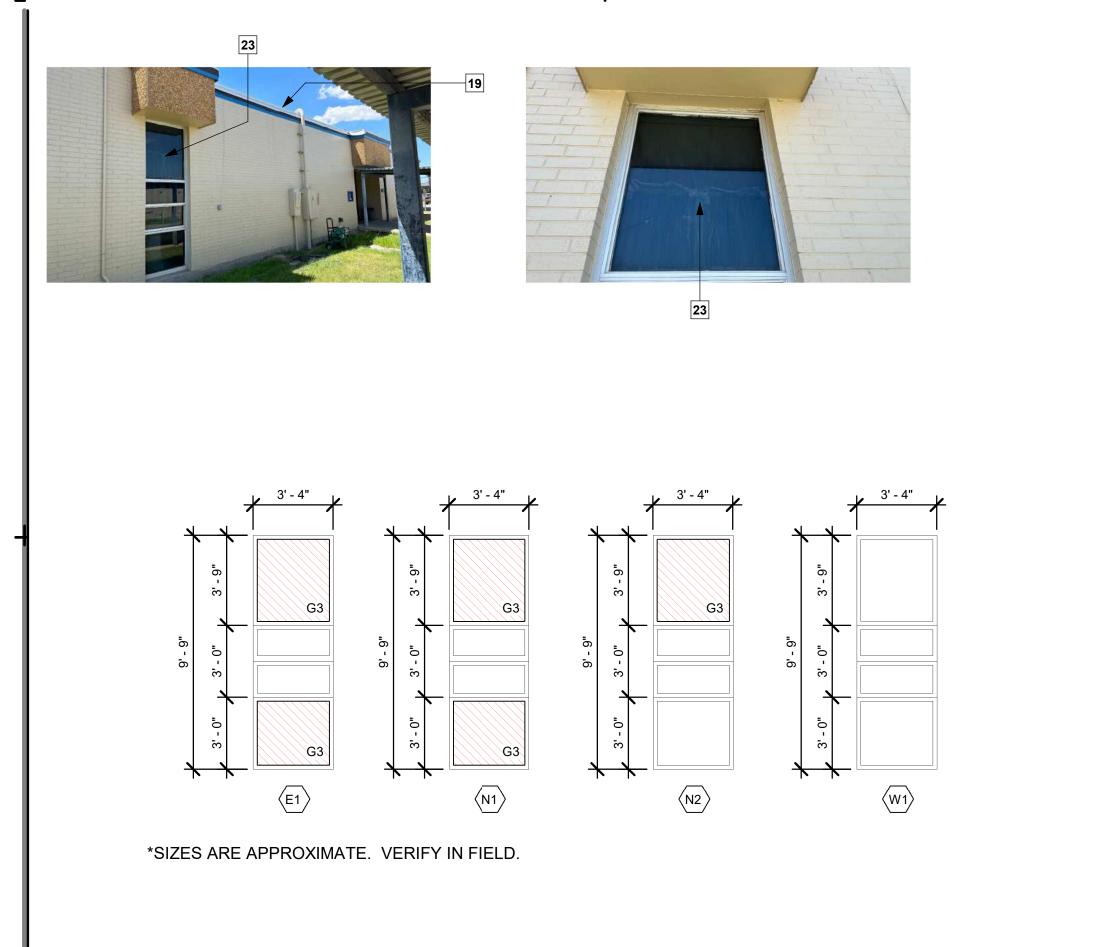

			WINDOW SCHEDULE	
MARK	0175	FR/	AME	
	SIZE	TYPE	MATERIAL	COMMENTS
E1	SEE ELEVATION	STOREFRONT	EXISTING	REPLACE DAMAGED GLASS AS INDICAT
N1	SEE ELEVATION	STOREFRONT	EXISTING	REPLACE DAMAGED GLASS AS INDICAT
N2	SEE ELEVATION	STOREFRONT	EXISTING	REPLACE DAMAGED GLASS AS INDICAT
W1	SEE ELEVATION	STOREFRONT	EXISTING	REPLACE DAMAGED GLASS AS INDICAT

7/1/2024 11:29:06 AM

GLAZING SCHEDULE

G1 - CLEAR, INSULATED GLASS AS SPECIFIED. G2 - SPANDRAL GLASS AS SPECIFIED.

G3 - TINTED, INSULATED GLASS AS SPECIFIED. G4 - ALUMINUM WINDOW PANEL AS SPECIFIED.

*GLAZING OF NEW STOREFRONT UNITS ARE TO BE LARGE MISSLE IMPACT AS SPECIFIED. REPLACEMENT GLAZING IS TO MATCH EXISTING.


ATED ATED ATED ATED


KEYNOTES TO SHEET


PASSIVE AIR ROOF VENT REPLACEMENT: EXISTING PASSIVE AIR ROOF

1.

- VENT TO BE REMOVED. **ROOF ASSEMBLY REPLACEMENT:** SHADED REGION INDICATES EXISTING ROOFING ASSEMBLY TO BE REMOVED TO EXISTING METAL ROOF DECKING SUBSTRATE BELOW, AND NEW ROOFING INSTALLED. ALL DEBRIS IS TO BE REMOVED FROM THE SITE. SEE SPECIFICATIONS FOR EXTENT OF DEMOLITION AND SITE CONSTRAINTS.
- RIGID CONDUIT REPAIR (VIF): INDICATES EXISTING RIGID CONDUIT RUNS EXPOSED ON EXISTING ROOF, CONTRACTOR SHALL MAKE VISUAL INSPECTIONS ON SITE TO VERIFY THE EXTENT OF WORK WHICH BE REQUIRED TO MOVE AND RELOCATE THESE CONDUIT RUNS DURING THE PROCESS OF RE-ROOFING AND TO ENSURE THAT THE NEW ROOF SLOPES ARE INTEGRATED AND ACCOUNTED FOR WHERE EXTENSIONS OF THESE CONDUITS AND WIRING IS REQUIRED.
 ROOF CURB REPLACEMENT: ALL EXISTING ROOF CURBS TO BE REMOVED
- ROOF CURB REPLACEMENT: ALL EXISTING ROOF CURBS TO BE REMOVED AND REPLACED IN AREAS BEING RE-ROOFED.
 ROOF DRAIN REPAIR (VIF): APPROXIMATE LOCATION OF EXISTING ROOF DRAIN, CONTRACTOR SHALL VISUALLY INSPECT ALL CONDITIONS REPLACE
- DAMAGED COMPONENTS AND ADJUST TO NEW ROOF SLOPE.
 FLASHING VIF: SEE DETAILS FOR FLASHING AND COUNTERFLASHING
 WHICH IS TO TIE INTO THE EXISTING BUILDING ENVELOPE. VERIFY
 CLEARANCES AND LOCATIONS FOR INSTALLATION OF ALL FLASHING AND
- TERMINATION BARS AS DETAILED.
 RUNNER CURB INSTALLMENT: PROVIDE NEW "RUNNER CURBS" FOR SUPPORT OF ALL HARD PIPING WHICH IS TO REMAIN ON ROOF AFTER NEW INSTALLATION. SPACE CURBS AS REQUIRED SO CONDUIT AND PIPING
- BOUST ALLEATION. OF AGE CONDUCTIONS AND TAILED OF CONDUCTION AND THINKED DOES NOT SAG BETWEEN THESE LOCATIONS. INSTALL AS DETAILED.
 8. ROOF EXPANSION JOINT REPAIR (VIF): INDICATES APPROXIMATE AREA AND LOCATION OF ROOF EXPANSION JOINT. CONTRACTOR SHALL VISUALLY INSPECT THE EXISTING CONDITIONS AT THE SITE AND PROVIDE A NEW EXPANSION JOINT AS DETAILED WITHIN THESE DOCUMENTS. THE INSTALLER SHOULD ASSUME THAT ALL EXISTING WOOD BLOCKING SHALL BE REPLACED WITH NEW TREATED WOOD BLOCKING AS PER DETAILS. PROVIDE NEW CANT STRIP, FLASHING, PRE-FINISHED EXPANSION JOINT COVER, VINYL BELLOWS, AND BASE FLASHING AS DETAILED. VERIFY EXACT ROUTING AND AREA WHERE THIS EJ IS TO BE REMOVED AND REPLACED, VERIFY ALL EXISTING CONDITIONS, ESPECIALLY ANY PIPING, AND CONDUIT WHICH MIGHT INTERSECT OR CROSS OVER THIS JOINT.
- PLUMBING VENT REPLACEMENT (VIF): CONTRACTOR SHALL VISUALLY INSPECT ALL EXISTING ROOFING PLUMBING VENTS WHICH ARE TO REMAIN. CONFIRM HEIGHTS OF VENT PIPING AND EXTEND WHERE REQUIRED DUE TO INSTALLATION OF NEW TAPERED INSULATION. EXTEND ALL VENTS AS REQUIRED TO MAINTAIN VERTICAL CLEARANCES CALLED FOR ON EACH RELATED CONSTRUCTION DETAIL. REPLACE ALL LEAD VENT & PIPE FLASHING. TYPICAL ALL LOCATIONS.
- FLASHING REPLACEMENT: REMOVE AND REPLACE FLASHING, COUNTER-FLASHING AND PRE-FINISHED METAL FASCIA FLASHING AS DETAILED.
 SKYLIGHT REPLACEMENT: INSTALL NEW ALUMINUM SKYLIGHT GUARD TO MATCH EXISTING.
- 12. HVAC REPAIR (VIF): INDICATES EXISTING HVAC EQUIPMENT AT EXISTING ROOF WHICH IS TO REMAIN. COORDINATE WORK INVOLVED WITH THIS ROOF WHICH IS TO REMAIN. COORDINATE WORK INVOLVED WITH THIS EQUIPMENT AND NEW ROOFING ASSEMBLY SO AS TO NOT DISRUPT SERVICE TO THE EXISTING BUILDING. IF SERVICE IS REQUIRED TO BE TEMPORARILY SUSPENDED WHILE WORK IS TAKING PLACE, THE CONTRACTOR SHALL COORDINATE ANY AND ALL OUTAGES WITH THE OWNER AND WILL BE REQUIRED TO ONLY PERFORM THIS WORK AT TIMES WHE SUSPENSION OF THIS SERVICE MINIMALLY AFFECTS THE OWNERS USE OF TEH BUILDING. IF THE SERVICE CANNOT BE SUSPENDED DURING OWNER'S OPERATING HOURS, WORK MAY HAVE TO BE PERFORMED AFTER HOURS, OR ON WEEKENDS.
- SATELLITE INSTALLATION: SEE DETAILS FOR SATELLITE MOUNTING UNIT.
 "A" METAL PANEL REPLACEMENT: METAL WALL PANEL "A" REMOVE AND REPLACE DAMAGED/MISSING METAL WALL PANEL AS SPECIFIED. SEE BUILDING ELEVATIONS.
 SIGNAGE INSTALLATION: INSTALL MISSING LETTERING TO MATCH
- EXISTING.
- ROOF ACCESSORY REPLACEMENT: REPLACE DAMAGED ROOF ACCESSORIES. MATCH EXISTING TYPE, MATERIAL, AND STYLE.
 DOWNSPOUT AND GUTTER CLEANING: DOWNSPOUT/COLLECTOR LOCATIONS, SEE ELEVATIONS. CONTRACTOR IS TO REMOVE ALL DEBRIS FROM GUTTERS AND DOWN SPOUTS.
- SATELLITE REMOVAL: REMOVE ALL SATELLITE COMPONENTS. THESE ARE NO LONGER IN USE.
 COPING: SEE ROOFING SHEETS FOR COPING, OVERHANG & ROOFING
- SCOPES -TYP.
- 20. EXTERIOR CLEANING: PRESSURE WASH WALLS TO REMOVE SCUFFS FROM STORM DEBRIS.
- WIND TURBINE REPLACEMENT: REMOVE AND REPLACE WIND TURBINE TO MATCH EXISTING.
 PAINTING EXTERIOR: CLEAN, PREP & RE-PAINT WALLS AND ARTWORK TO
- COVER SCUFFS AND DAMAGE FROM STORM DEBRIS. COLOR TO MATCH EXISTING AS APPROVED BY ARCHITECT.
 23. GLASS REPLACEMENT: REMOVE AND REPLACE DAMAGED GLASS (OR DIAMAGED ADDITION TO MATCH EXISTING ADDITIONAL CONTRACT OF A DIAMAGED STORMAGED GLASS (OR
- PLYWOOD WHERE APPLICABLE) TO MATCH EXISTING. PROVIDE CAULKING AND GASKETING.
 24. STUCCO SOFFIT REPLACEMENT: SOFFIT REMOVED BY OTHERS
- (HAZARDOUS MATERIAL). COORDINATE AND INSTALL NEW STUCCO SOFFIT.
 25. <u>AGGREGATE PANEL REPLACEMENT: DELAMINATED & DAMAGED</u> AGGREGATE PANELS REMOVED BY OTHERS (HAZARDOUS MATERIAL).
- 26. DOWNSPOUT AND GUTTER REPLACEMENT: REMOVE REMAINING
- ATTACHMENTS AND COMPONENTS OF DOWNSPOUT, GUTTER AND CONDUCTOR HEADS AND INSTALL NEW TO MATCH EXISTING COLOR, DIMENSION, GAUGE, AND MATERIAL. GROUT HOLES AT OLD STRAPS PRIOR TO NEW INSTALLATION & ATTACH AT INTERVALS EQUAL TO EXISTING SPACING. SALVAGE AND PREP REMAINING COMPONENTS FOR NEW INSTALLATION. CONTRACTOR IS TO REMOVE ALL DEBRIS FROM GUTTERS AND DOWN SPOUTS.
- BRICK REPAIR: REMOVE AND REPLACE BRICK FACADE AS INDICATED. DISPOSE OF OLD BRICK, MATCH NEW BRICK AND MORTAR TO EXISTING AS APPROVED BY ARCHITECT. PRESERVE SUBSTRATE. REMOVE OLD BRICK TIES AND WATER PROOFING, INSTALL NEW WATERPROOFING AND BRICK TIES AT A MIN. OF 24" O.C. VERTICAL AND HORIZONTAL
 PLASTER SOFFIT REPLACEMENT: REMOVE REMAINING VINYL SOFFIT AND DEPENDENT OF THE PROOFING PRESERVE HOULT A DEMOTION AND ADDRESS
- REPLACE TO MATCH EXISTING PRESERVE LIGHT & REINSTALL AS NECESSARY.

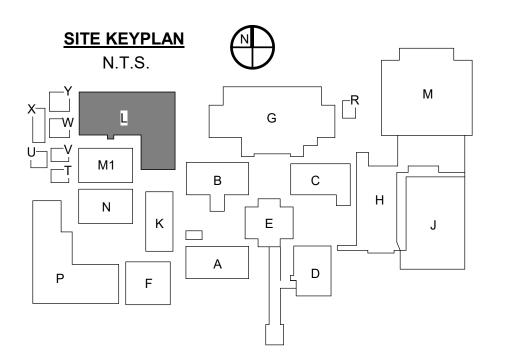

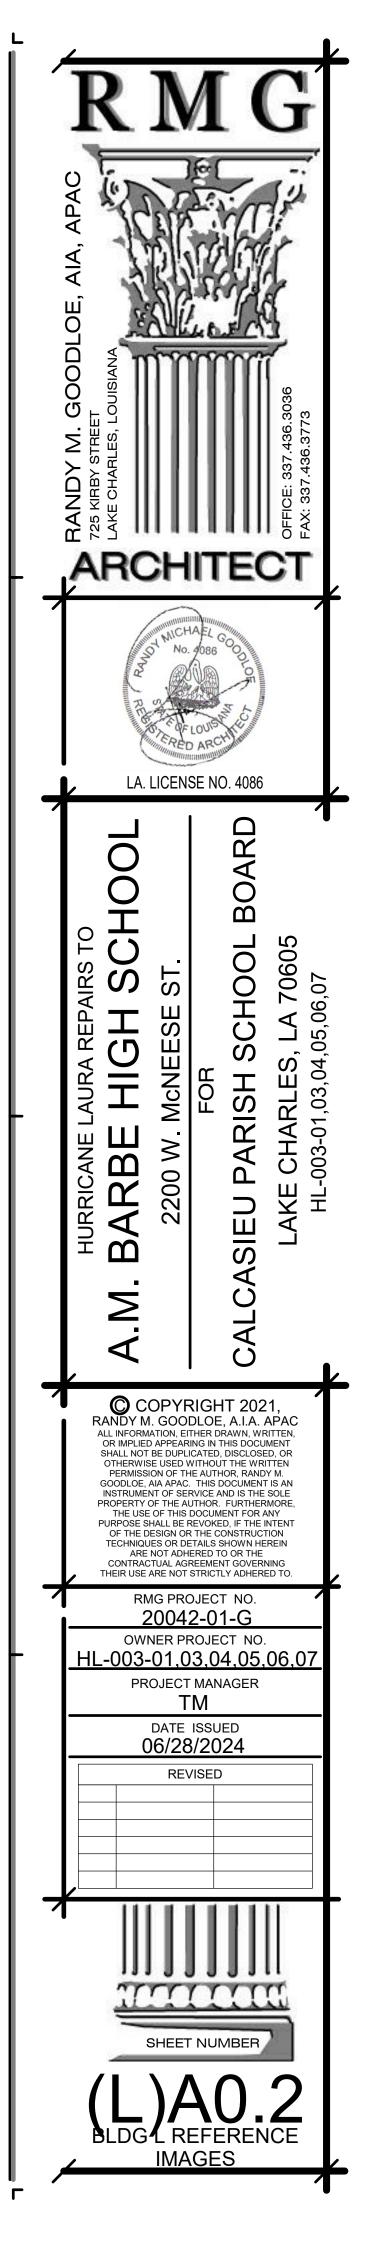

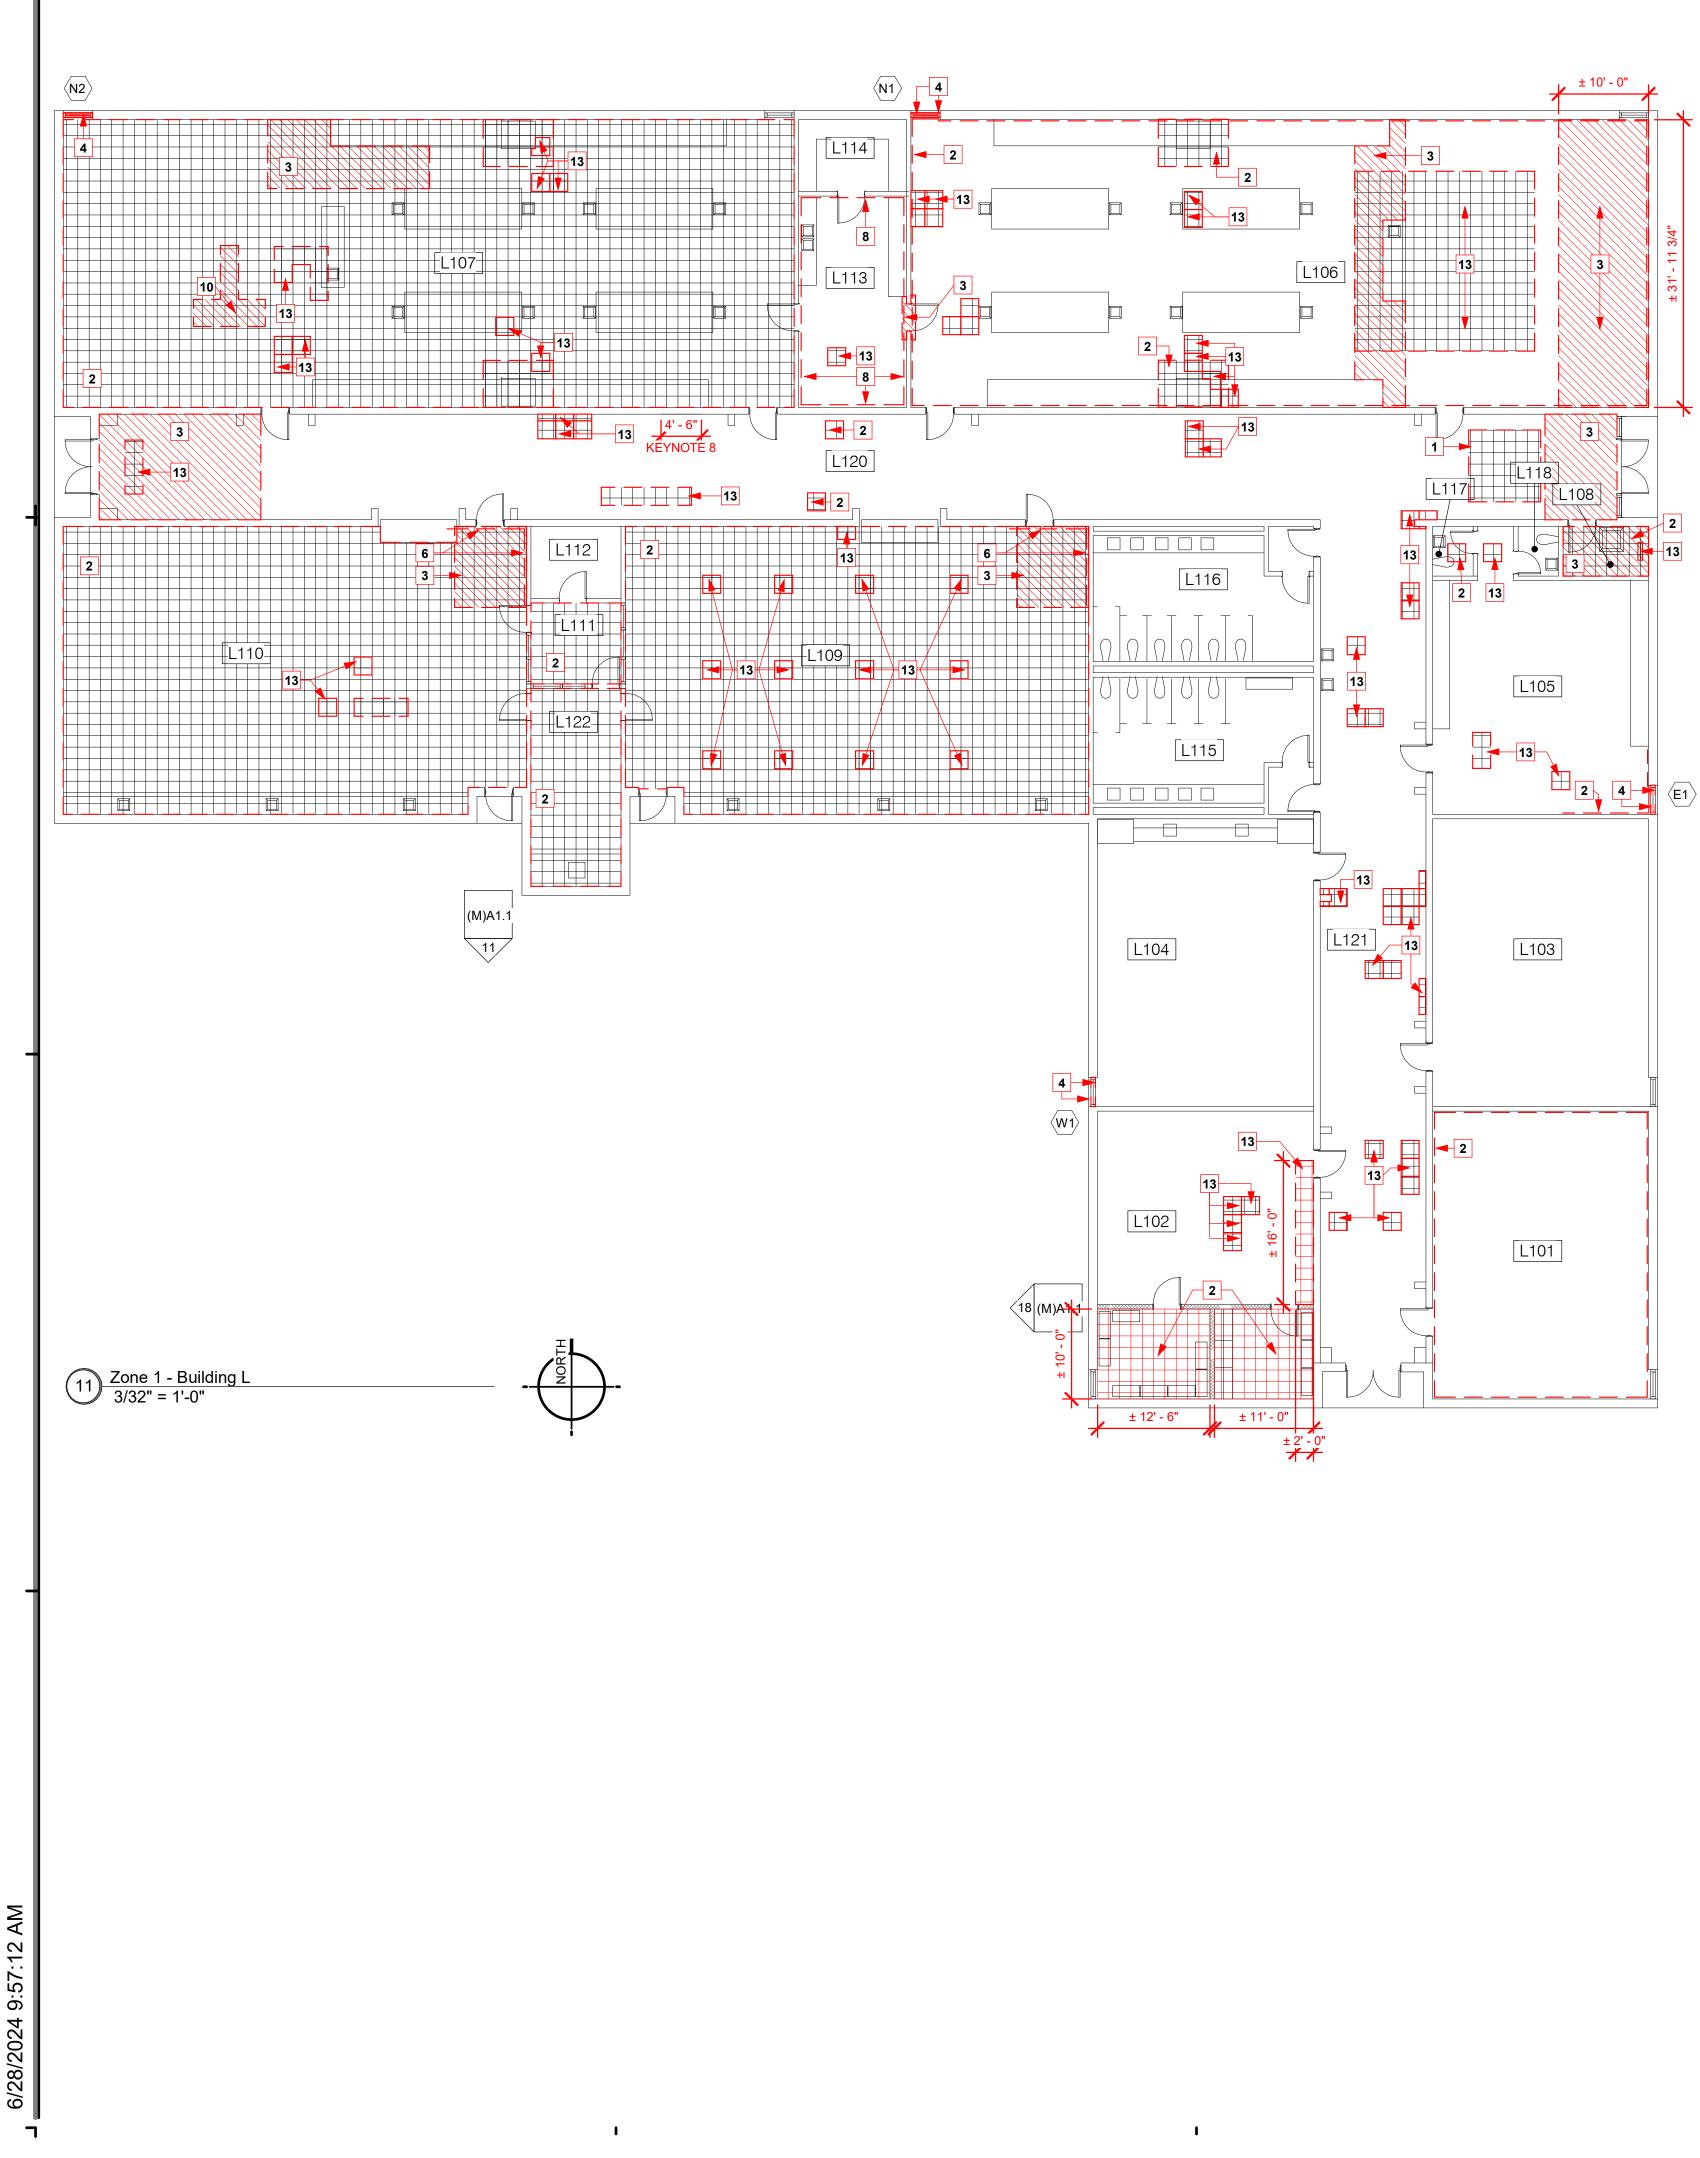

AM 2024

*THESE MEASUREMENTS ARE APPROXIMATE TO BE USED AS GUIDELINES ONLY. CONTRACTOR IS RESPONSIBLE FOR ALL FINAL MEASUREMENTS.

KEYNOTES


- SUSPENDED ACOUSTIC CEILING REPLACEMENT: REMOVE AND REPLACE
- DAMAGED CEILING GRID AND CEILING TILE AS SPECIFIED. CEILING GRID: REMOVE AND REPLACE DAMAGED CEILING GRID. MATCH
- EXISTING. SEE UNIT PRICE NO. 5
- VCT FLOORING REPAIRS: REMOVE AND REPLACE VCT FLOORING AS SPECIFIED IN AREAS WHERE INDICATED. SEE UNIT PRICE NO. 3. WINDOW REPAIRS: REPLACE BROKEN WINDOW PANES, BLOCKS, AND GASKETS
- TO MATCH EXISTING. ALL SEALANTS SHALL BE REMOVED AND REPLACED AS SPECIFIED TO ENSURE WEATHER TIGHT SEAL. SEE ELEVATIONS. STRUCTURAL CLAY BLOCK: GLAZED STRUCTURAL CLAY BLOCK TO BE
- REMOVED AND REPLACED AS SPECIFIED TO MATCH EXISTING. CLEAN ALL CHALKING RESIDUE FROM EFFERVESCENCE. VINYL BASE REPLACEMENT: REPLACE DAMAGED OR MISSING BASE AS
- SPECIFIED TO MATCH EXISTING. SEE UNIT PRICE NO. 4
- CARPET REPAIRS: DAMAGED CARPET HAS BEEN REMOVED. CLEAN FLOOR AND INSTALL NEW CARPET TILE AS SPECIFIED. PAINTING: WALL SURFACE IS TO BE SANDED, PREPARED, AND REPAINT TO
- MATCH EXISTING CORNER TO CORNER. WATER STAINED WALL FROM ROOF 1055 PAINTED CEILING STRUCTURE: CEILING INCLUDING METAL TRUSSES ARE TO 9.
- BE CLEANED, PREPPED, AND REPAINTED END TO END TO MATCH EXISTING COLOR. 10. VCT FLOORING CLEANING: CLEAN WATER STAINS FROM VCT FLOORING TO REMOVE ANY DISCOLORATION WHERE INDICATED. MOP AND WAX ALL VCT
- FLOORING AT THE END OF CONSTRUCTION. **SKYLIGHT REPAIRS:** REMOVE AND REPLACE SKYLIGHT TO MATCH EXISTING. 12. TERRAZZO FLOORING CLEANING: CLEAN AND POLISH EXISTING TERRAZZO
- FLOORING. REFER TO ROOM SCHEDULE FOR CLARITY. CEILING TILE REPLACEMENT: REMOVE AND REPLACE DAMAGED OR MISSING 13. ACOUSTIC CEILING TILE WITH NEW CEILING TILE AS SPECIFIED IN AREAS INDICATED. MATCH EXISTING TYPE AND SIZE. SEE UNIT PRICE NO. 1. INSTALL R-30 BATT INSULATION OVER TILE. SEE UNIT PRICE NO. 2
- NOT USED. 14. EXTERIOR WINDOWS AND DOORS: CAULK AND RESEAL PERIMETER OF 15 EXISTING WINDOWS AND DOORS.
- CMU REPAIR: RE-POINT DAMAGED CMU JOINTS AS SHOWN. PAINT WALL FROM END TO END IN COLOR TO MATCH EXISTING AS SPECIFIED. SEE PHOTOS.
- BRICK REPAIR: CAULK CRACKED AREAS AND REPAINT. 17. LOCKERS: REPLACE DAMAGED UNITS AS SHOWN. MATCH EXISTING STYLE, 18.
- SIZE AND COLORS. BRICK WALLS: CLEAN ALL WATER STAINS FROM ENTIRE BRICK WALL SHELVING REPLACEMENT: REMOVE AND REPLACE DAMAGED SHELVING UNITS 20. WITH <u>GLASS DOORS</u>. MATCH EXISTING MATERIALS, FINISHES AND
- CONSTRUCTION STYLE. BASE CABINET: REMOVE AND REPLACE DAMAGED BASE CABINET. MATCH 21. EXISTING STYLE, SIZE, AND CONSTRUCTION. SALVAGE AND REINSTALL
- COUNTERTOP 22. SECTIONAL DOOR: REMOVE AND REPLACE OVERHEAD SECETIONAL DOOR AS SPECIFIED. CONTRACTOR TO PROVIDE ANY ADDITIONAL SUPPORT REQUIRED BY THE MANUFACTURER.
- GYPSUM BOARD: REMOVE AND REPLACE DAMAGED GYPSUM BOARD TO 23. NEAREST FRAMING MEMBER. FINISH AND RE-PAINT WALL CORNER TO CORNER.
- PREFINISHED GYPSUM BOARD WITH VINYL WALL COVER AND CORNER TRIM: 24. REMOVE AND REPLACE DAMAGED VINYL COVERED GYPSUM BOARD FROM FLOOR TO CEILING WHERE INDICATED ON FLOOR PLAN.
- STOREFRONT WINDOW: REMOVE AND REPLACE STOREFRONT WINDOW AS 25. SPECIFIED. STUCCO SOFFIT: REMOVE & REPLACE STUCCO SOFFIT. COORDINATE WITH 26.
- ABATEMENT SCOPE & ABATEMENT CONTRACTOR TO ENSURE WEATHER-TIGHTNESS AND PHASING COORDINATION. SEE WALL SECTIONS & DETAILS. GYPSUM CEILING REPAIRS: REMOVE AND REPLACE DAMAGED GYPSUM 27. CEILING BOARD TO NEAREST FRAMING MEMBER WHERE INDICATED, FINISH TO
- MATCH EXISTING AS SPECIFIED. METAL ROOF PANEL REPAIRS: REMOVE AND REPLACE DEFORMED OR MISSING METAL ROOF PANELS TO MATCH EXISTING.
- CONCRETE FLOOR CLEANING: CLEAN AND RESEAL FLOOR AS SPECIFIED. BASE CABINET: REMOVE AND REPLACE DAMAGED BASE CABINET. MATCH EXISTING STYLE, SIZE, AND CONSTRUCTION. SALVAGE AND REINSTALL COUNTERTOP. PROTECT ALL MECHANICAL CONNECTIONS. 31.
- TILE CLEANING: CLEAN STAINS FROM WALL TILE TO REMOVE ANY DISCOLORATION WHERE INDICATED. CLEAN/REPAINT MASONRY WALL: MECHANICALLY REMOVE ALL LOOSE OR 32. PEELING PAINT AND ALL CHALKING RESIDUE FROM EFFERVESCENCE FROM
- CORNER TO CORNER. PERFORM REQUIRED MOISTURE TESTING PRIOR TO REPAINTING WALL AS SPECIFIED. PLASTER CEILING REPAIRS: REMOVED AND REPLACE DAMAGED PLASTER 33. CEILING WHERE INDICATED AS SPECIFIED, PAINT IN COLOR TO MATCH
- EXISTING. **MEP DAMAGES:** SEE MECHANICAL, PLUMBING AND ELECTRICAL PLANS. FURNITURE SETTING AND RESETING: RELOCATE ALL EXISTING FURNITURE TO 35. TEMPORARY ROOM IN MODULAR BUILDINGS WHILE EXISTING SPACE IS BEING REPAIRED. REINSTALL AND RESET FURNITURE ONCE REPAIRS ARE
- COMPLETE. SEE PHASING PLAN. SUSPENDED CEILING INSULATION: INSTALL R-19 BATT INSULATION AS 36. SPECIFIED ABOVE PREVIOUSLY INSTALLED SUSPENDED CEILING TILE. SEE UNIT PRICE NO. 2.
- BRICK WALL REPLACEMENT: REMOVE AND REPLACE BRICK WALL AS 37. INDICATED. DISPOSE OF OLD BRICK, MATCH NEW BRICK AND MORTAR TO EXISTING AS APPROVED BY ARCHITECT, SEE STRUCTURAL. BUILDING TO REMAIN WEATHERPROOF AND CONDITIONED DURING REPAIRS. DOOR REPAIR: CLEAN, PREP AND RE-PAINT DOOR FRAME - SEE DOOR 38.
- SCHEDULE. CORRIDOR WALL REPAIR: REMOVE DAMAGED STOREFRONT WINDOW AND 39. EXISTING 3/4" PLYWOOD SHEATHING BELOW WINDOW. INSTALL NEW WINDOW
- PER SCHEDULE AND NEW 3/4" PLYWOOD SHEATHING. PAINT AS SPECIFIED, IN COLOR AS SELECTED. SEE DETAILS. 40. **GLAZING REPAIR:** REMOVE AND REPLACE BROKEN GLASS. MATCH EXISTING
- TINT. PROVIDE SAFETY GLASS AS REQUIRED. DOOR REPAIR: REMOVE AND REPLACE EXISTING LEFT DOOR LEAF. PROVIDE AN INSULATED HOLLOW METAL DOOR WITH VISION PANEL TO MATCH RIGHT DOOR LEAF. REINSTALL EXISTING DOOR HARDWARE. PAINT AS DIRECTED.


FLOOR PLAN LEGEND


- CEILING REPAIR REQUIRED


ROOMS -BUILDING L


Perimeter	
11' - 7"	
11' - 11"	
11' - 7"	
11' - 11"	
11' - 9"	
26' - 7"	
227' - 5"	
29' - 8"	
66' - 9"	
66' - 10"	
38' - 6"	
86' - 1"	
'2' - 2" 1' - 2"	
1' - 2"	
35' - 7"	
39' - 0"	
20' - 1"	
20' - 0"	
861' - 2"	
210' - 9"	
65' - 9"	

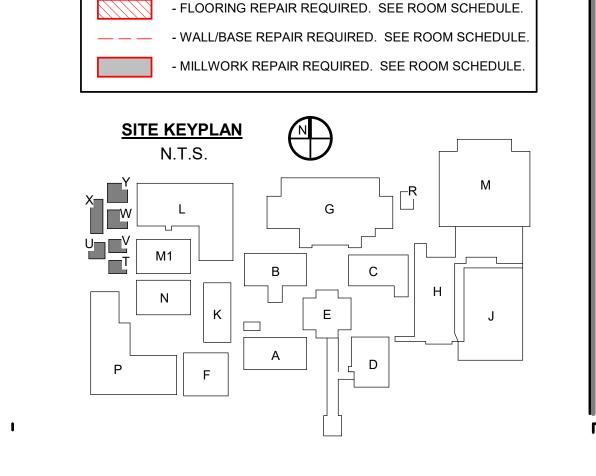

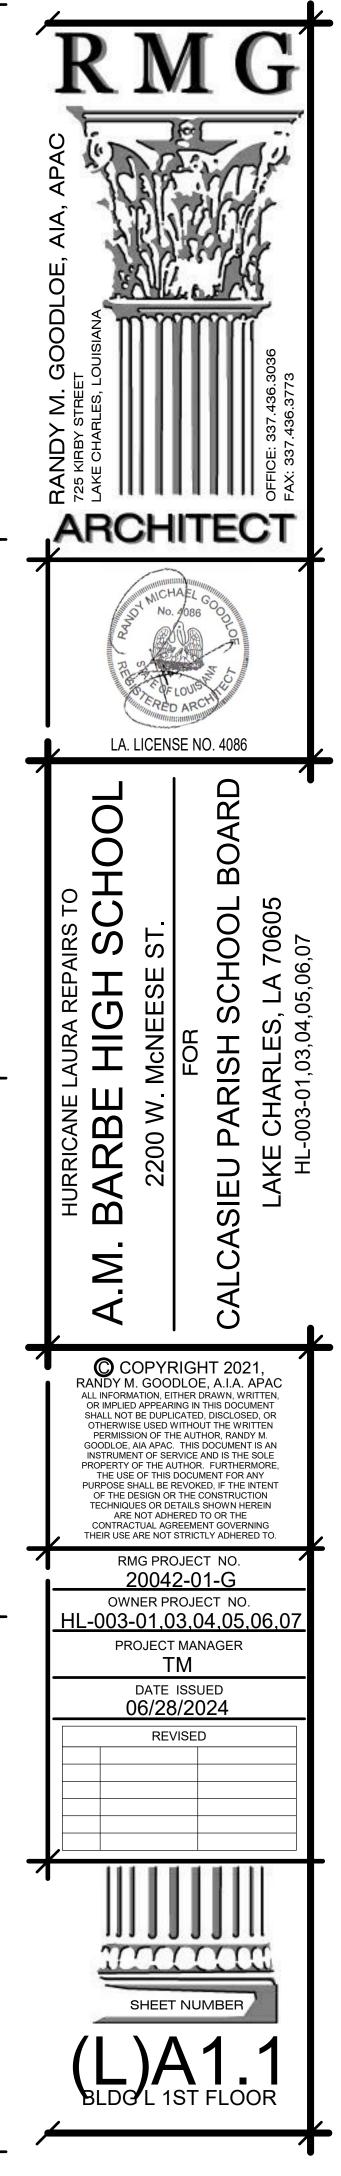

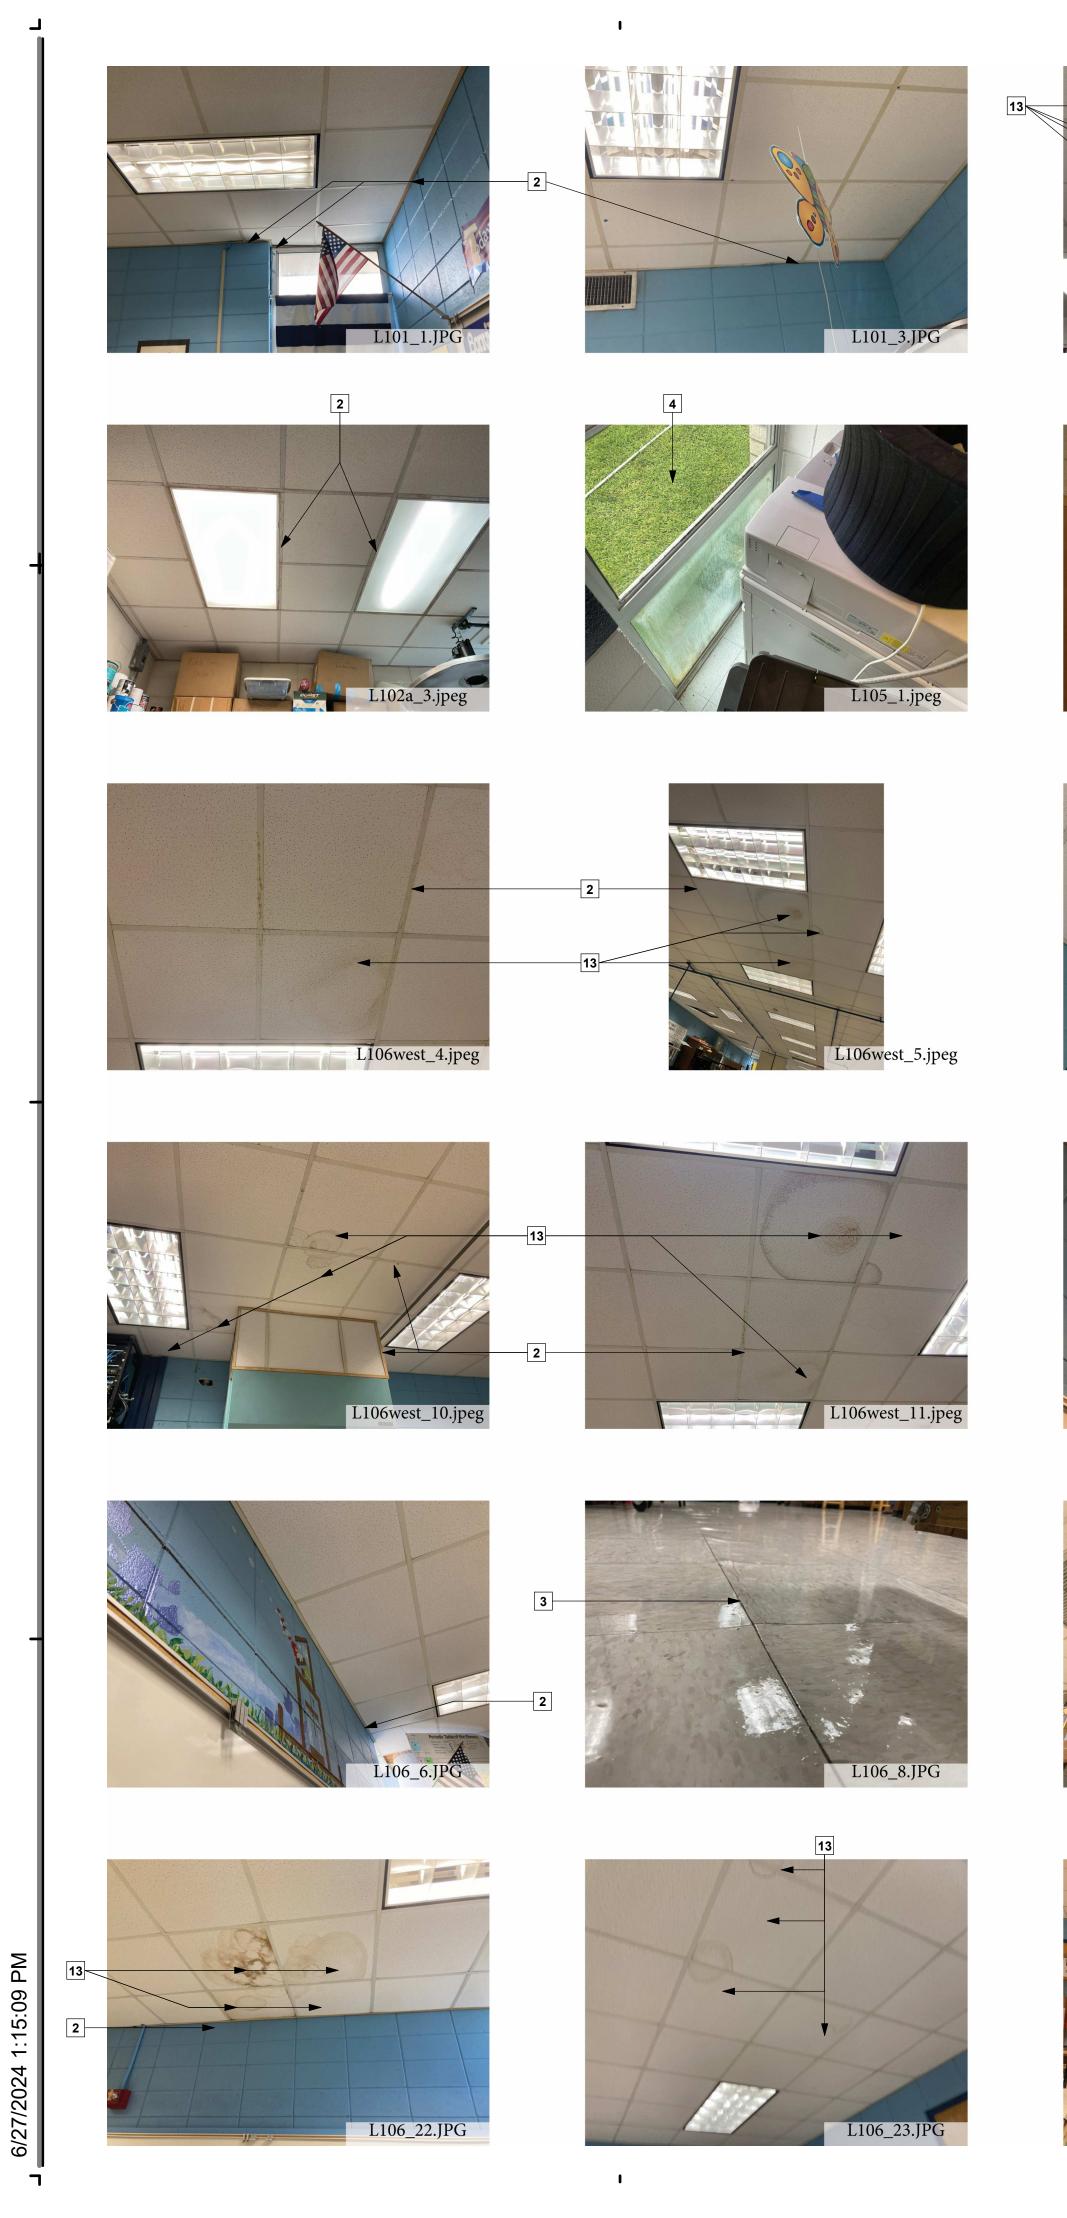


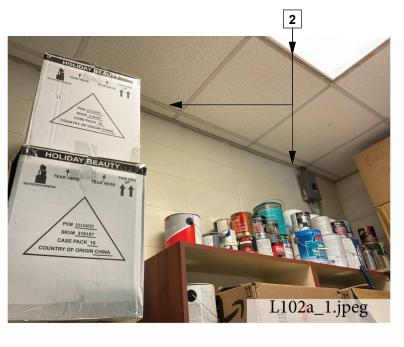

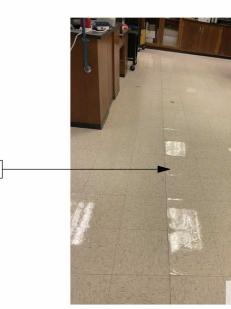






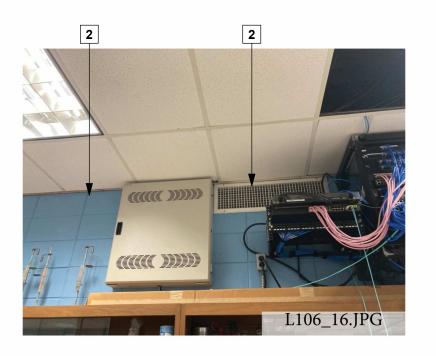




I

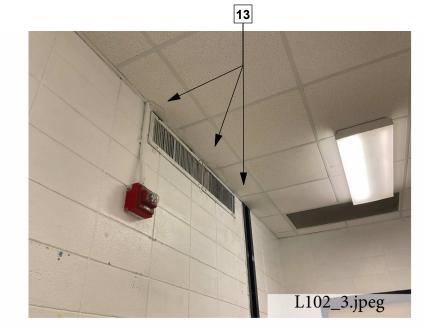




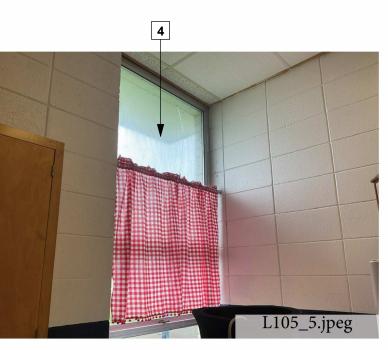



L106east_1.jpeg




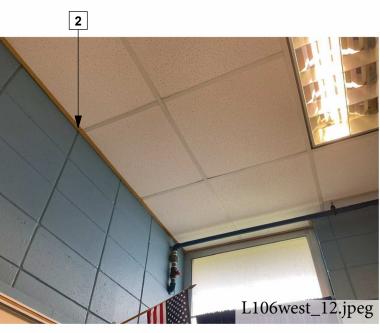







I

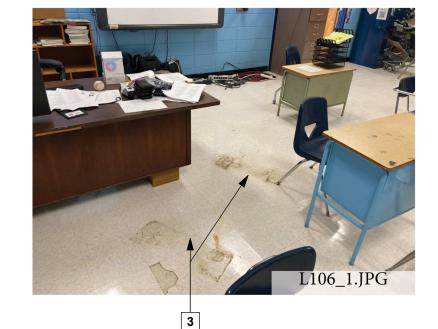




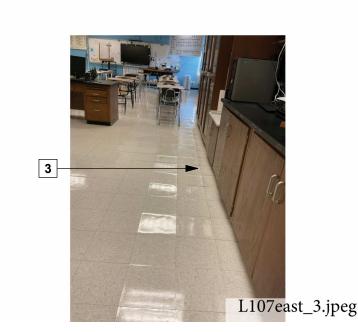



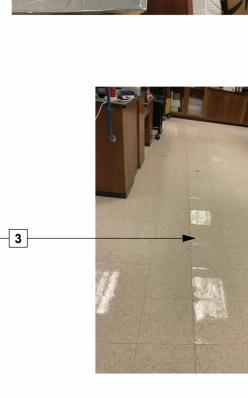




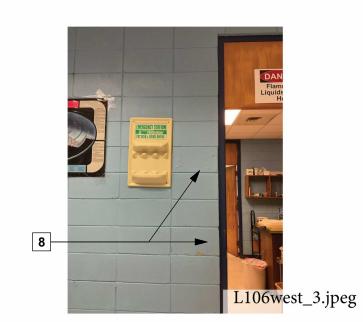

.102a_2.jpeg


L106east_3.jpeg

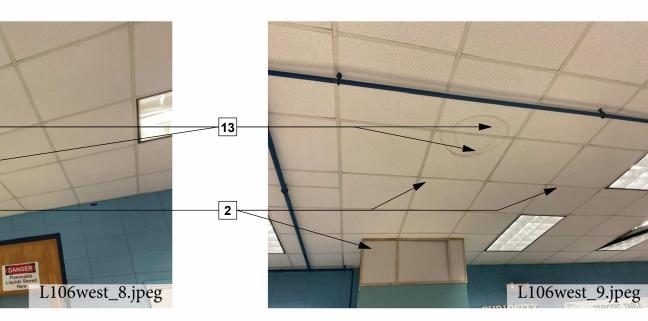








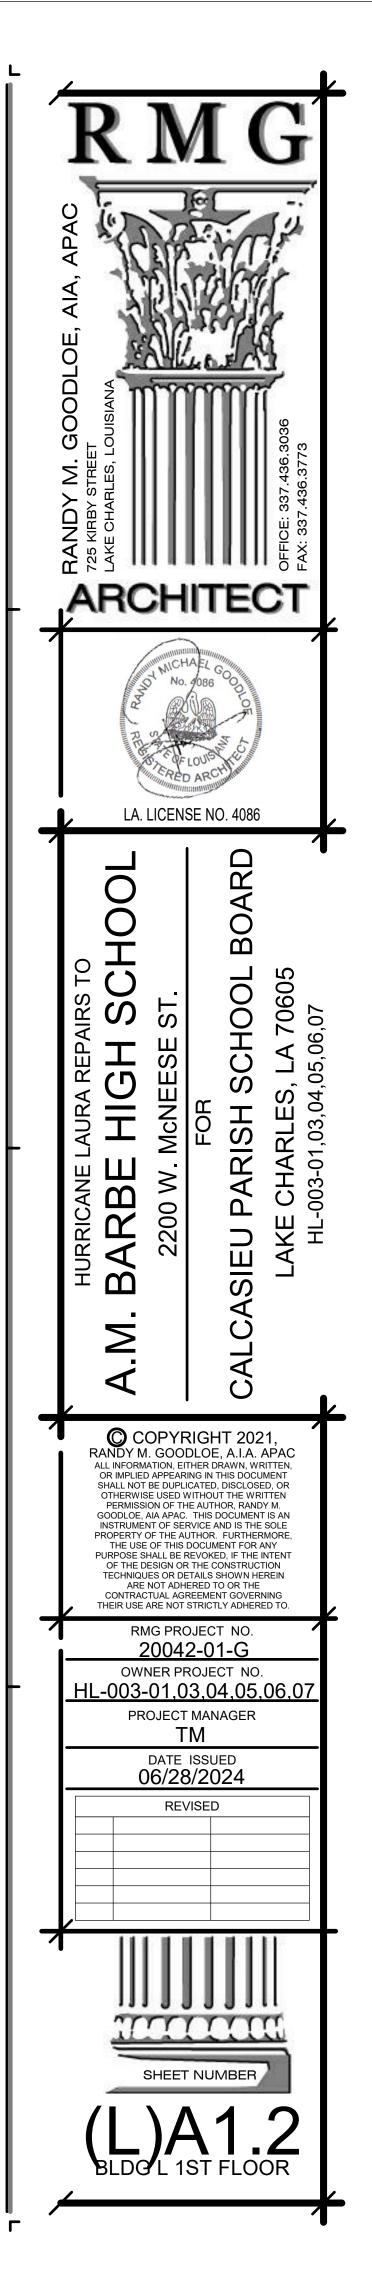


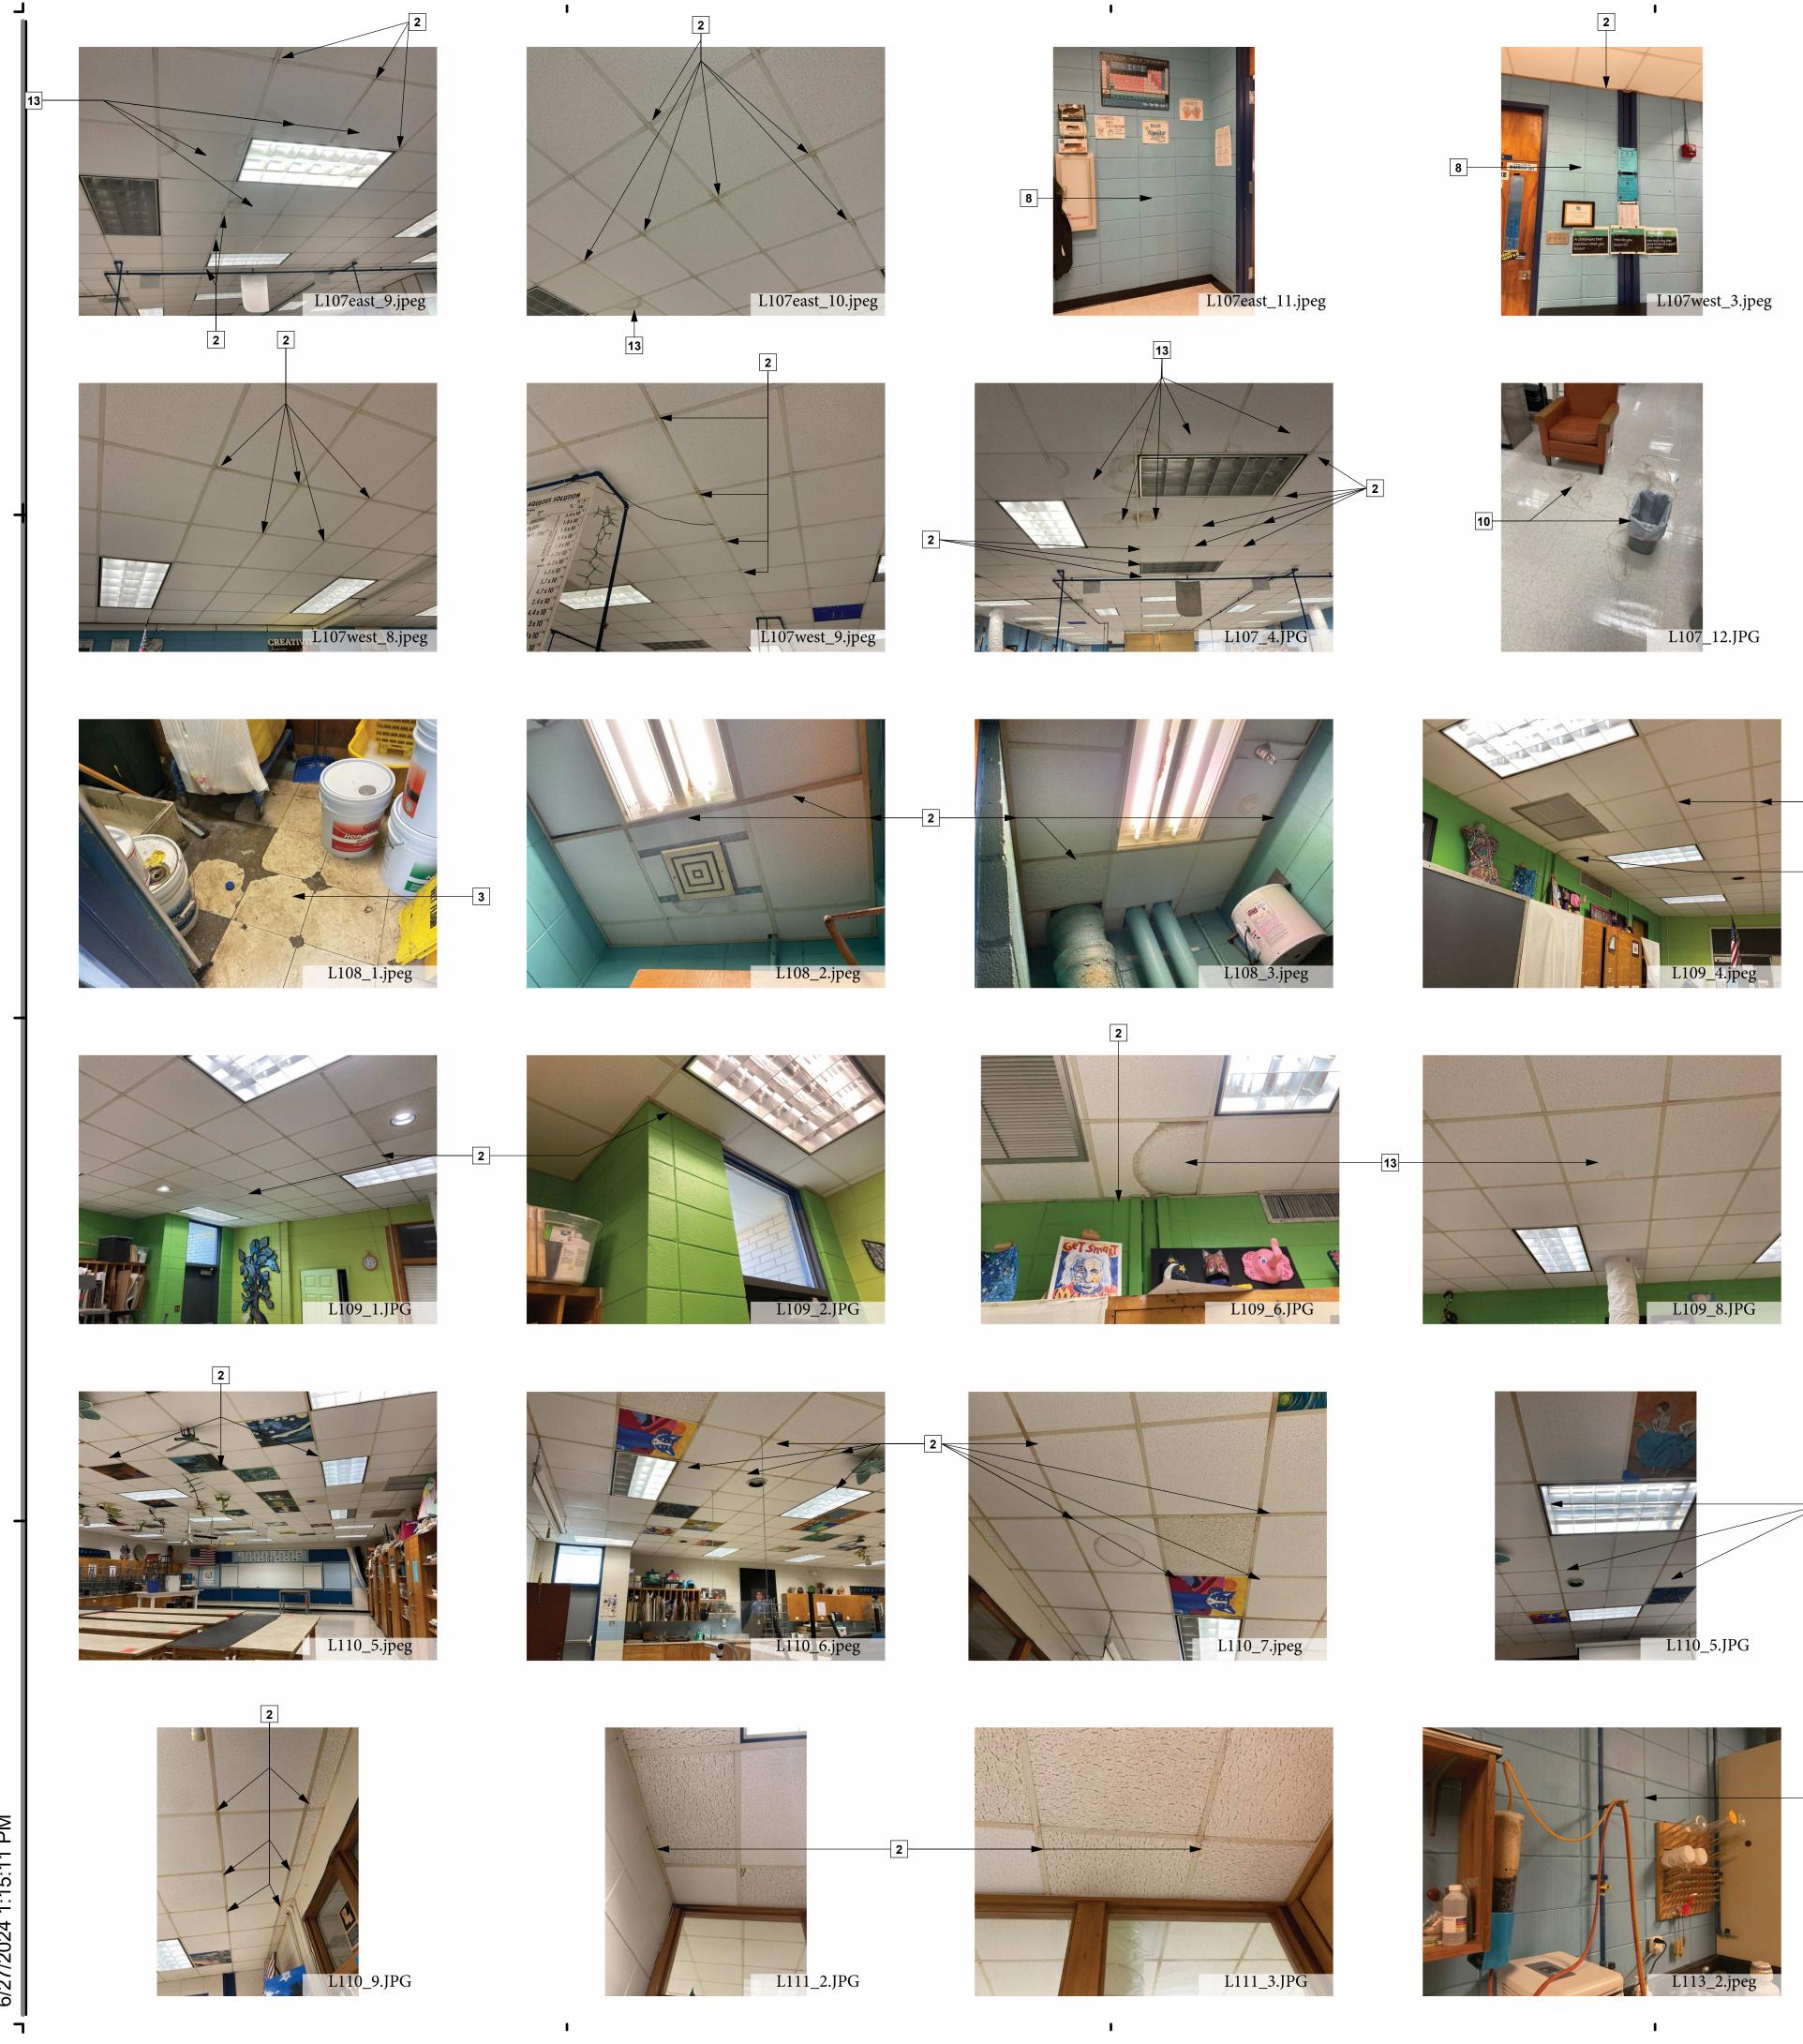


6/27/2024 1:15:11 PM






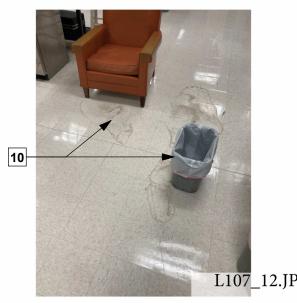

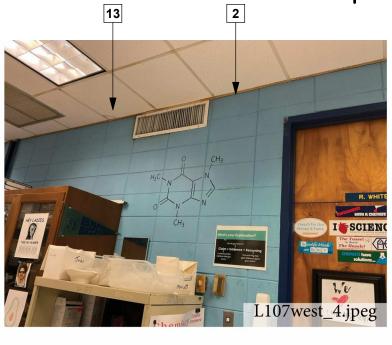







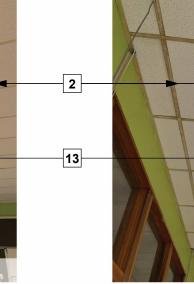



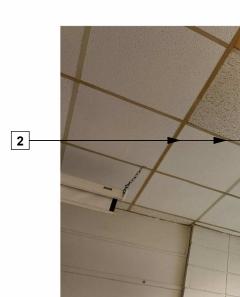

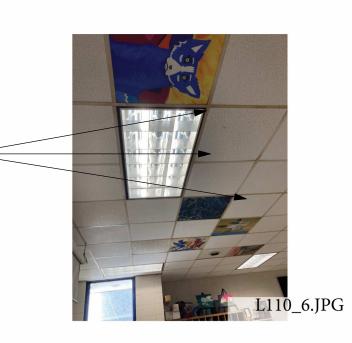





2





I

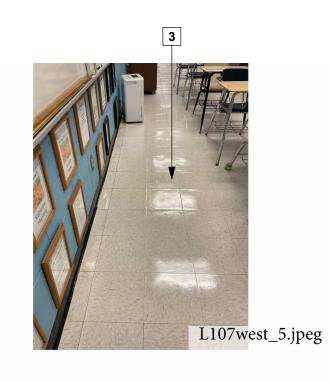

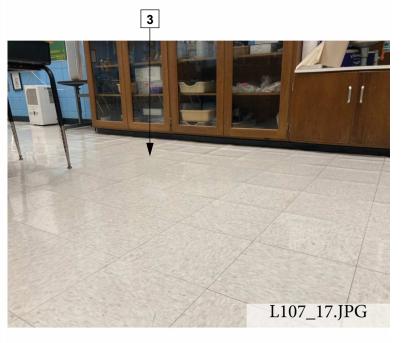





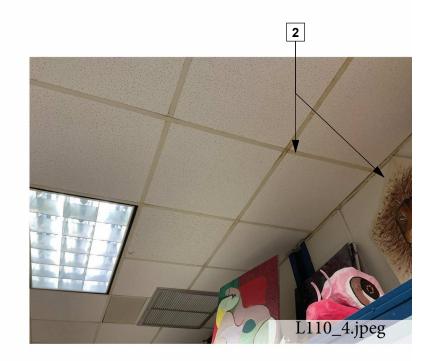

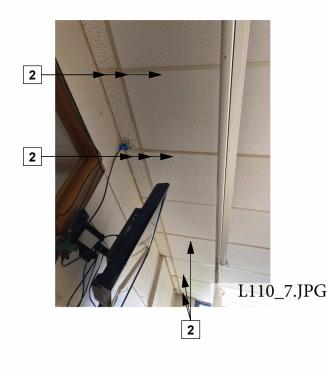



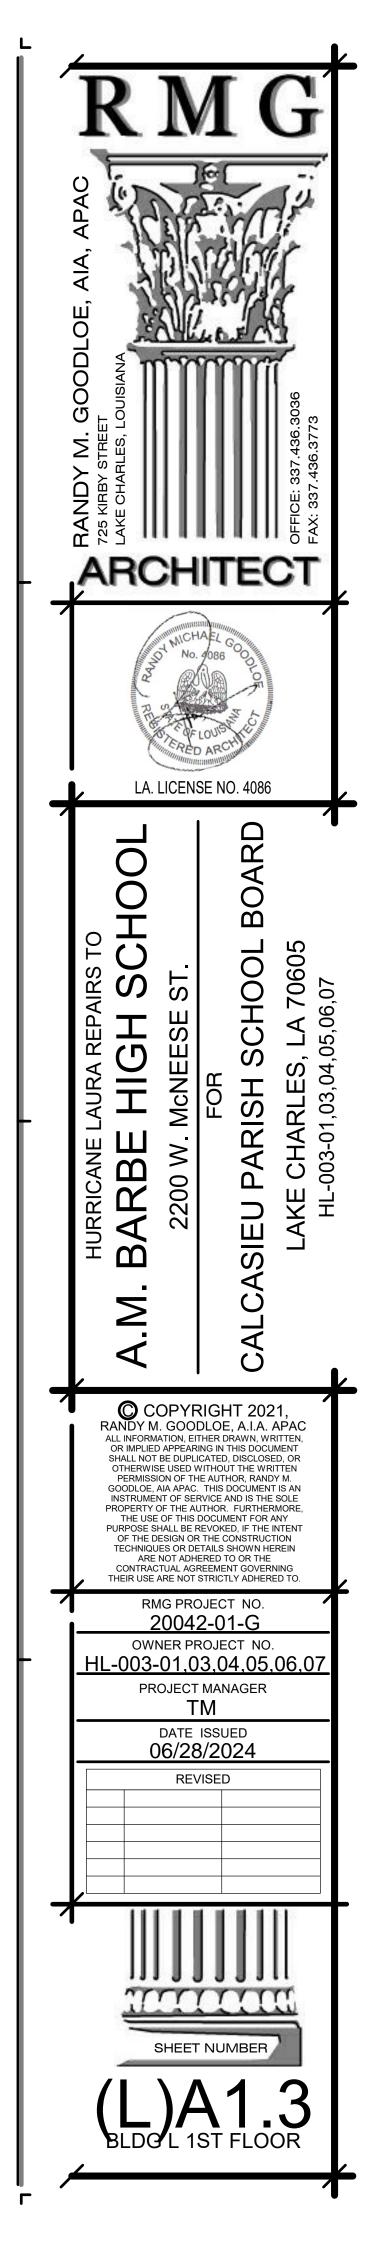

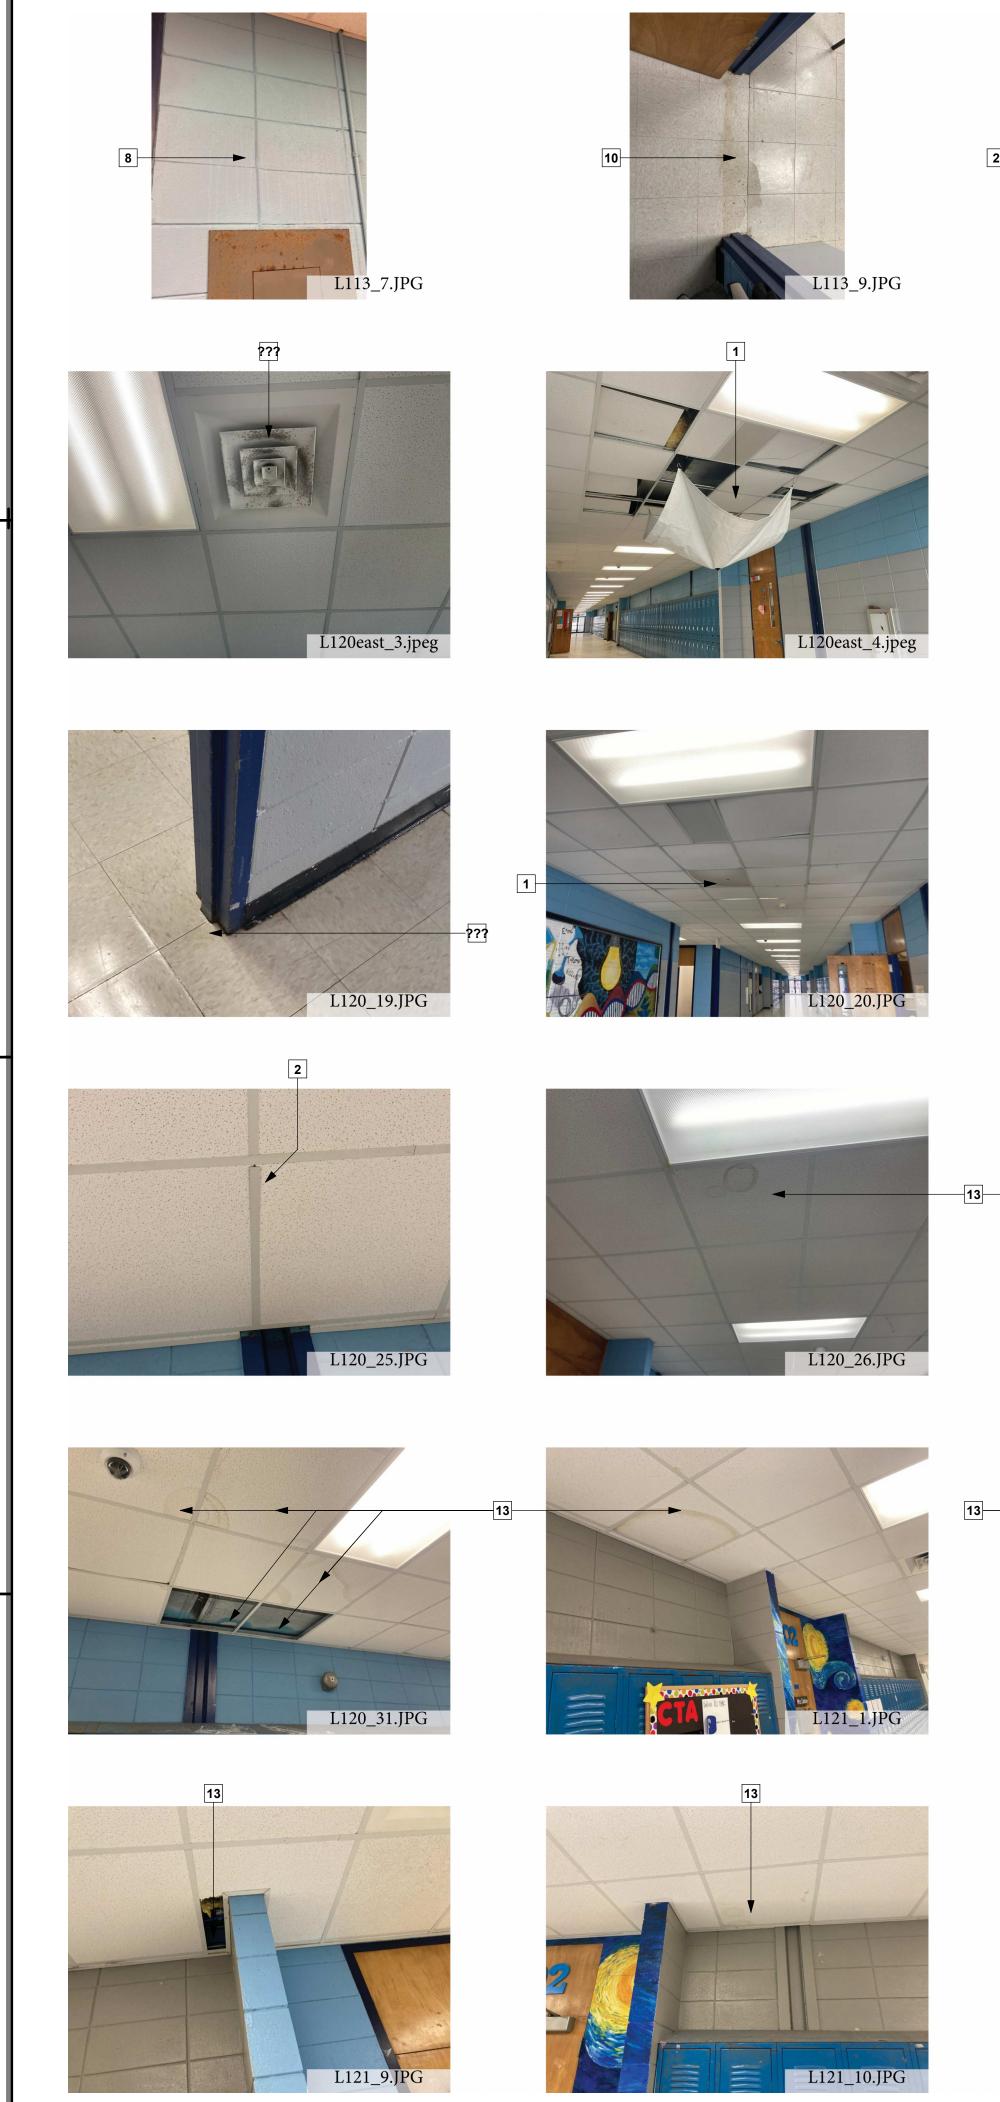


I


6/27/2024 1:15:21 PM

٦






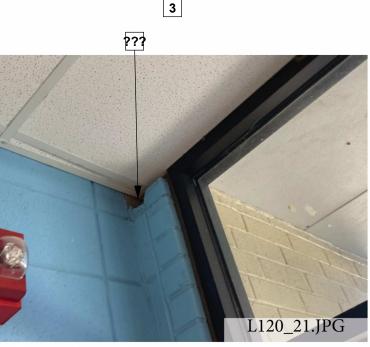

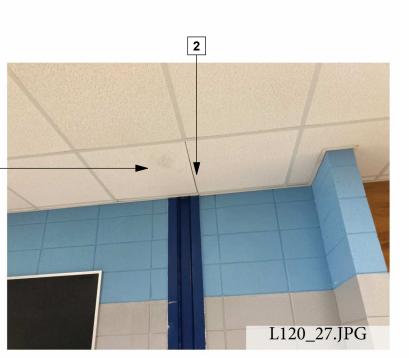





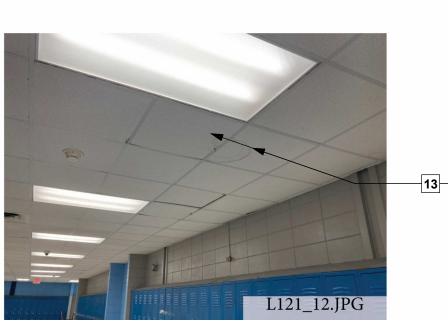

I



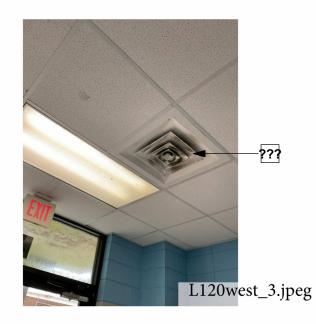

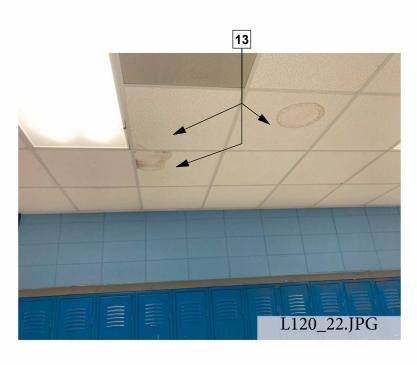








I









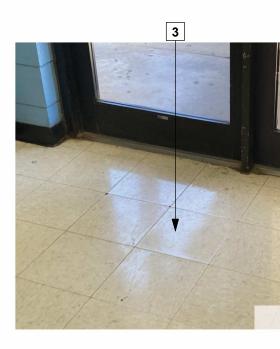











I

I

6/27/2024 1:15:31 PM



I

I




1


I




I



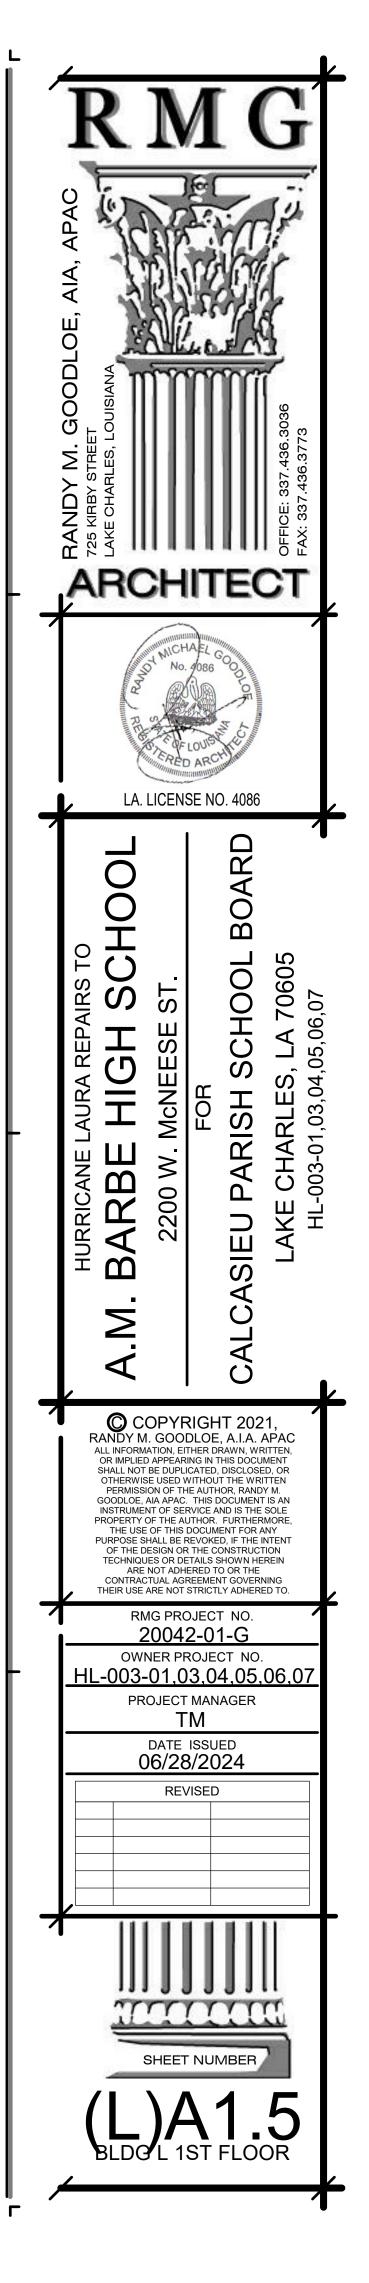

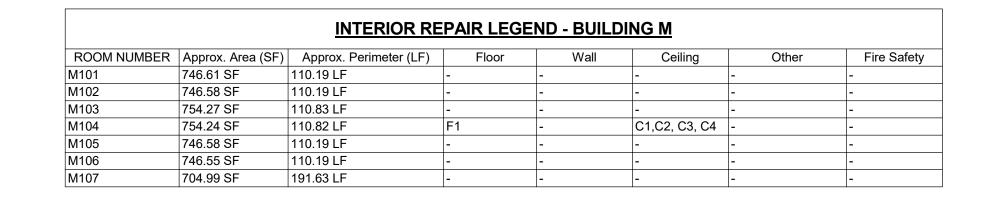

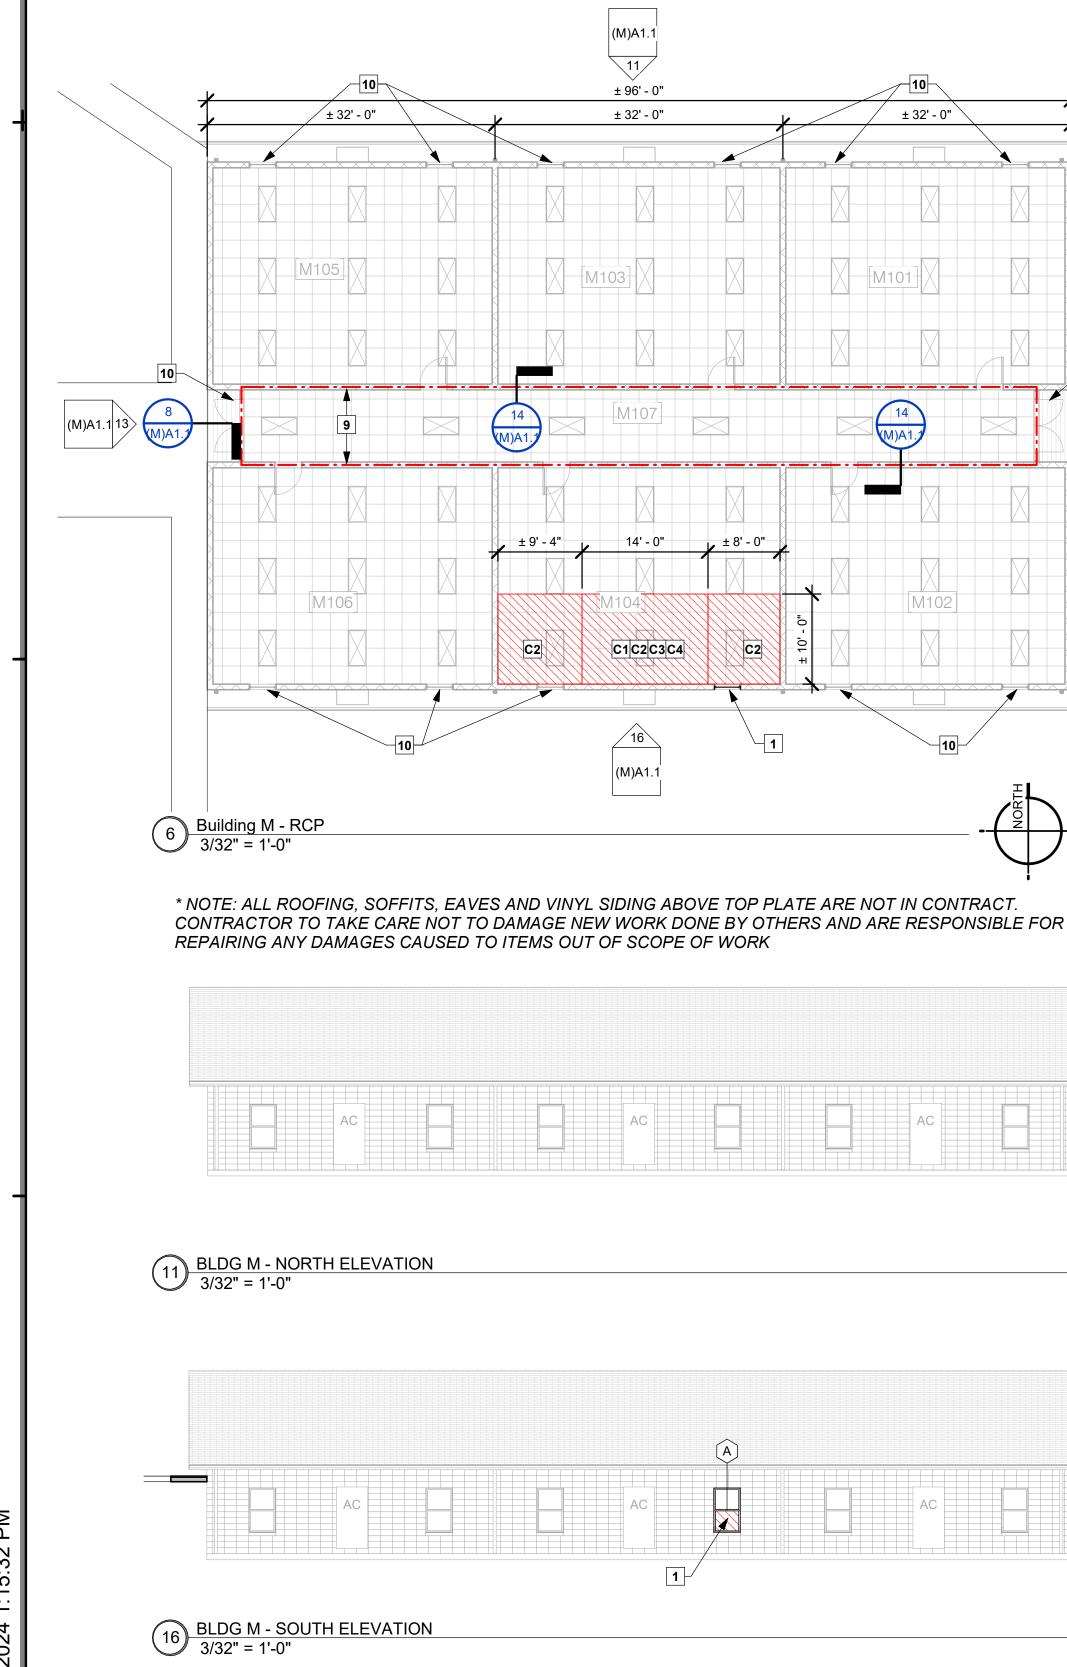

ЪΖ 1:15:32 2024 6/27

SCHEDULE FLOOR NOTES

F1 - CLEAN ENTIRE VCT FLOOR, BUFF AND WAX.


F2 - HATCHED AREA INDICATES VCT FLOORING TO BE REMOVED AND REPLACED TO MATCH EXISTING. SEE UNIT PRICE NO. 3 F3 - HATCHED AREA INDICATED REPLACE MISSING VCT TO MATCH EXISTING. SEE

UNIT PRICE NO. 3 F4 - REMOVE ALL WALL BASE AND REPLACE TO MATCH EXISTING.

SCHEDULE CEILING NOTES

C1 - REMOVE AND REPLACE DAMAGED CEILING TILES TO MATCH EXISTING. SEE UNIT PRICE NO. 1 C2 - REMOVE AND REPLACE DAMAGED CEILING GRID TO MATCH EXISTING. SEE UNIT

- PRICE NO. 5 C3 - HATCHED AREA INDICATES DAMAGED INSULATION TO BE REMOVED AND REPLACED TO MATCH EXISTING. SEE UNIT PRICE NO. 2
- C4 HATCHED AREA INDICATES DAMAGED GYPSUM CEILING TO BE REMOVED AND REPLACED.
- C5 HATCHED AREA INDICATES DAMAGED "X" GYPSUM CEILING TO BE REMOVED AND REPLACED ABOVE AND BELOW TRUSS CHORD, TAPE, FLOAT AND FIRESTOP CAULK.




SCHEDULE ARCHITECTURAL NOTES

A1 - REMOVE DAMAGED EXPANSION JOINT SEALANT AND BACKER ROD. PROVIDE CONTINUOUS NEW BACKER ROD AND SEALANT AT CMU EXPANSION JOINTS FROM SLAB TO TOP PLATE. PAINT TO MATCH EXISTING.



BUILDING M WINDOW SCHEDULE

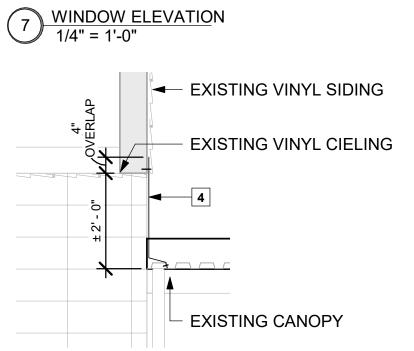



8 CANOPY FLASHING 1/2" = 1'-0"


13 BLDG M - WEST ELEVATION 3/32" = 1'-0"


09.16.202

DOCUMENT FOR SCOPE.

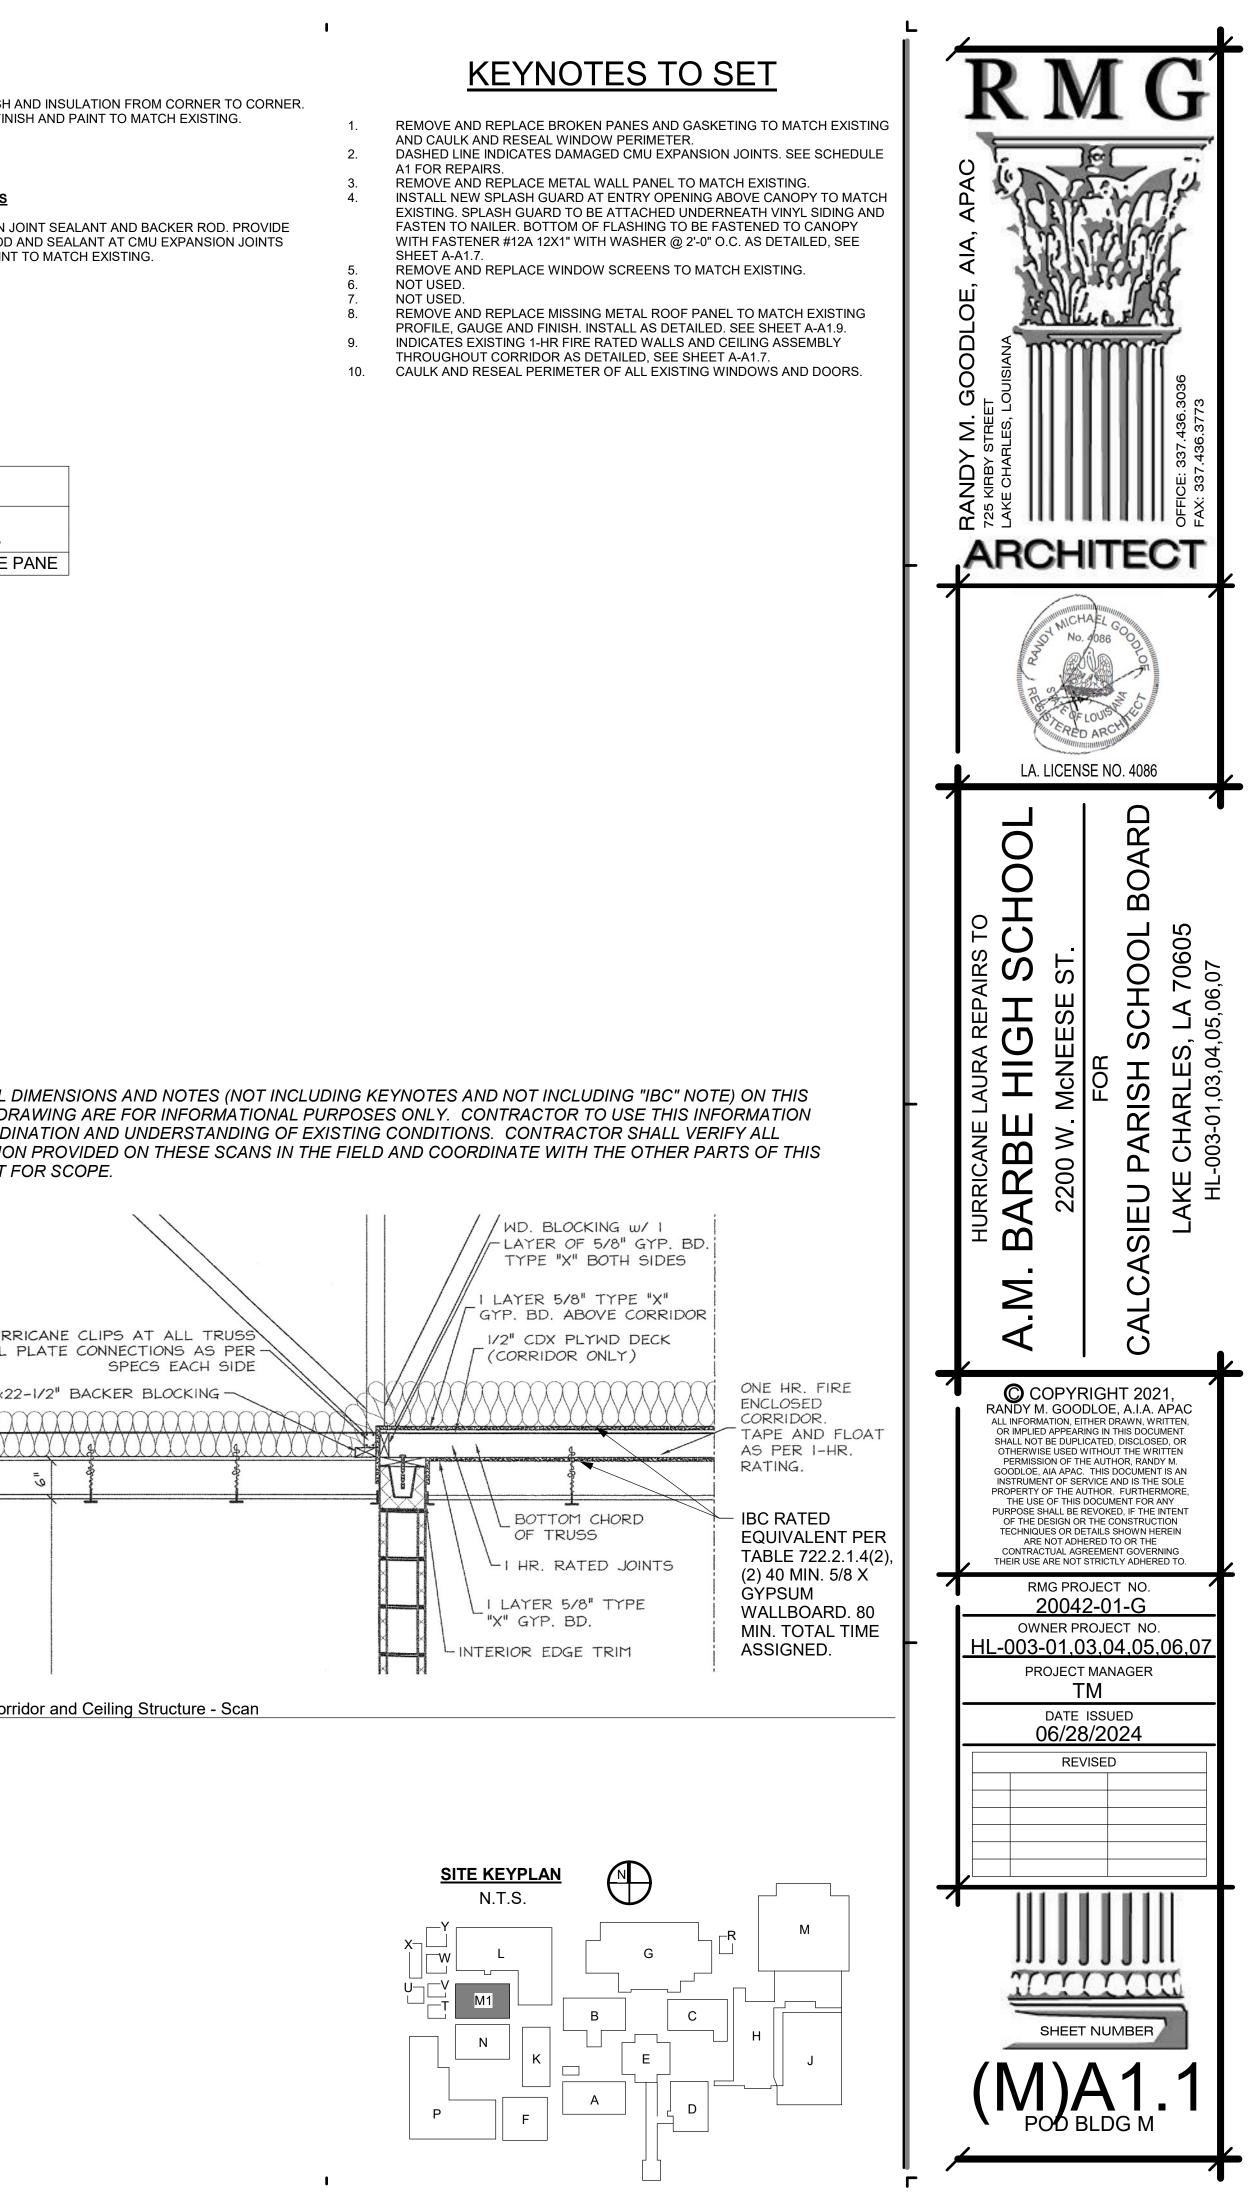


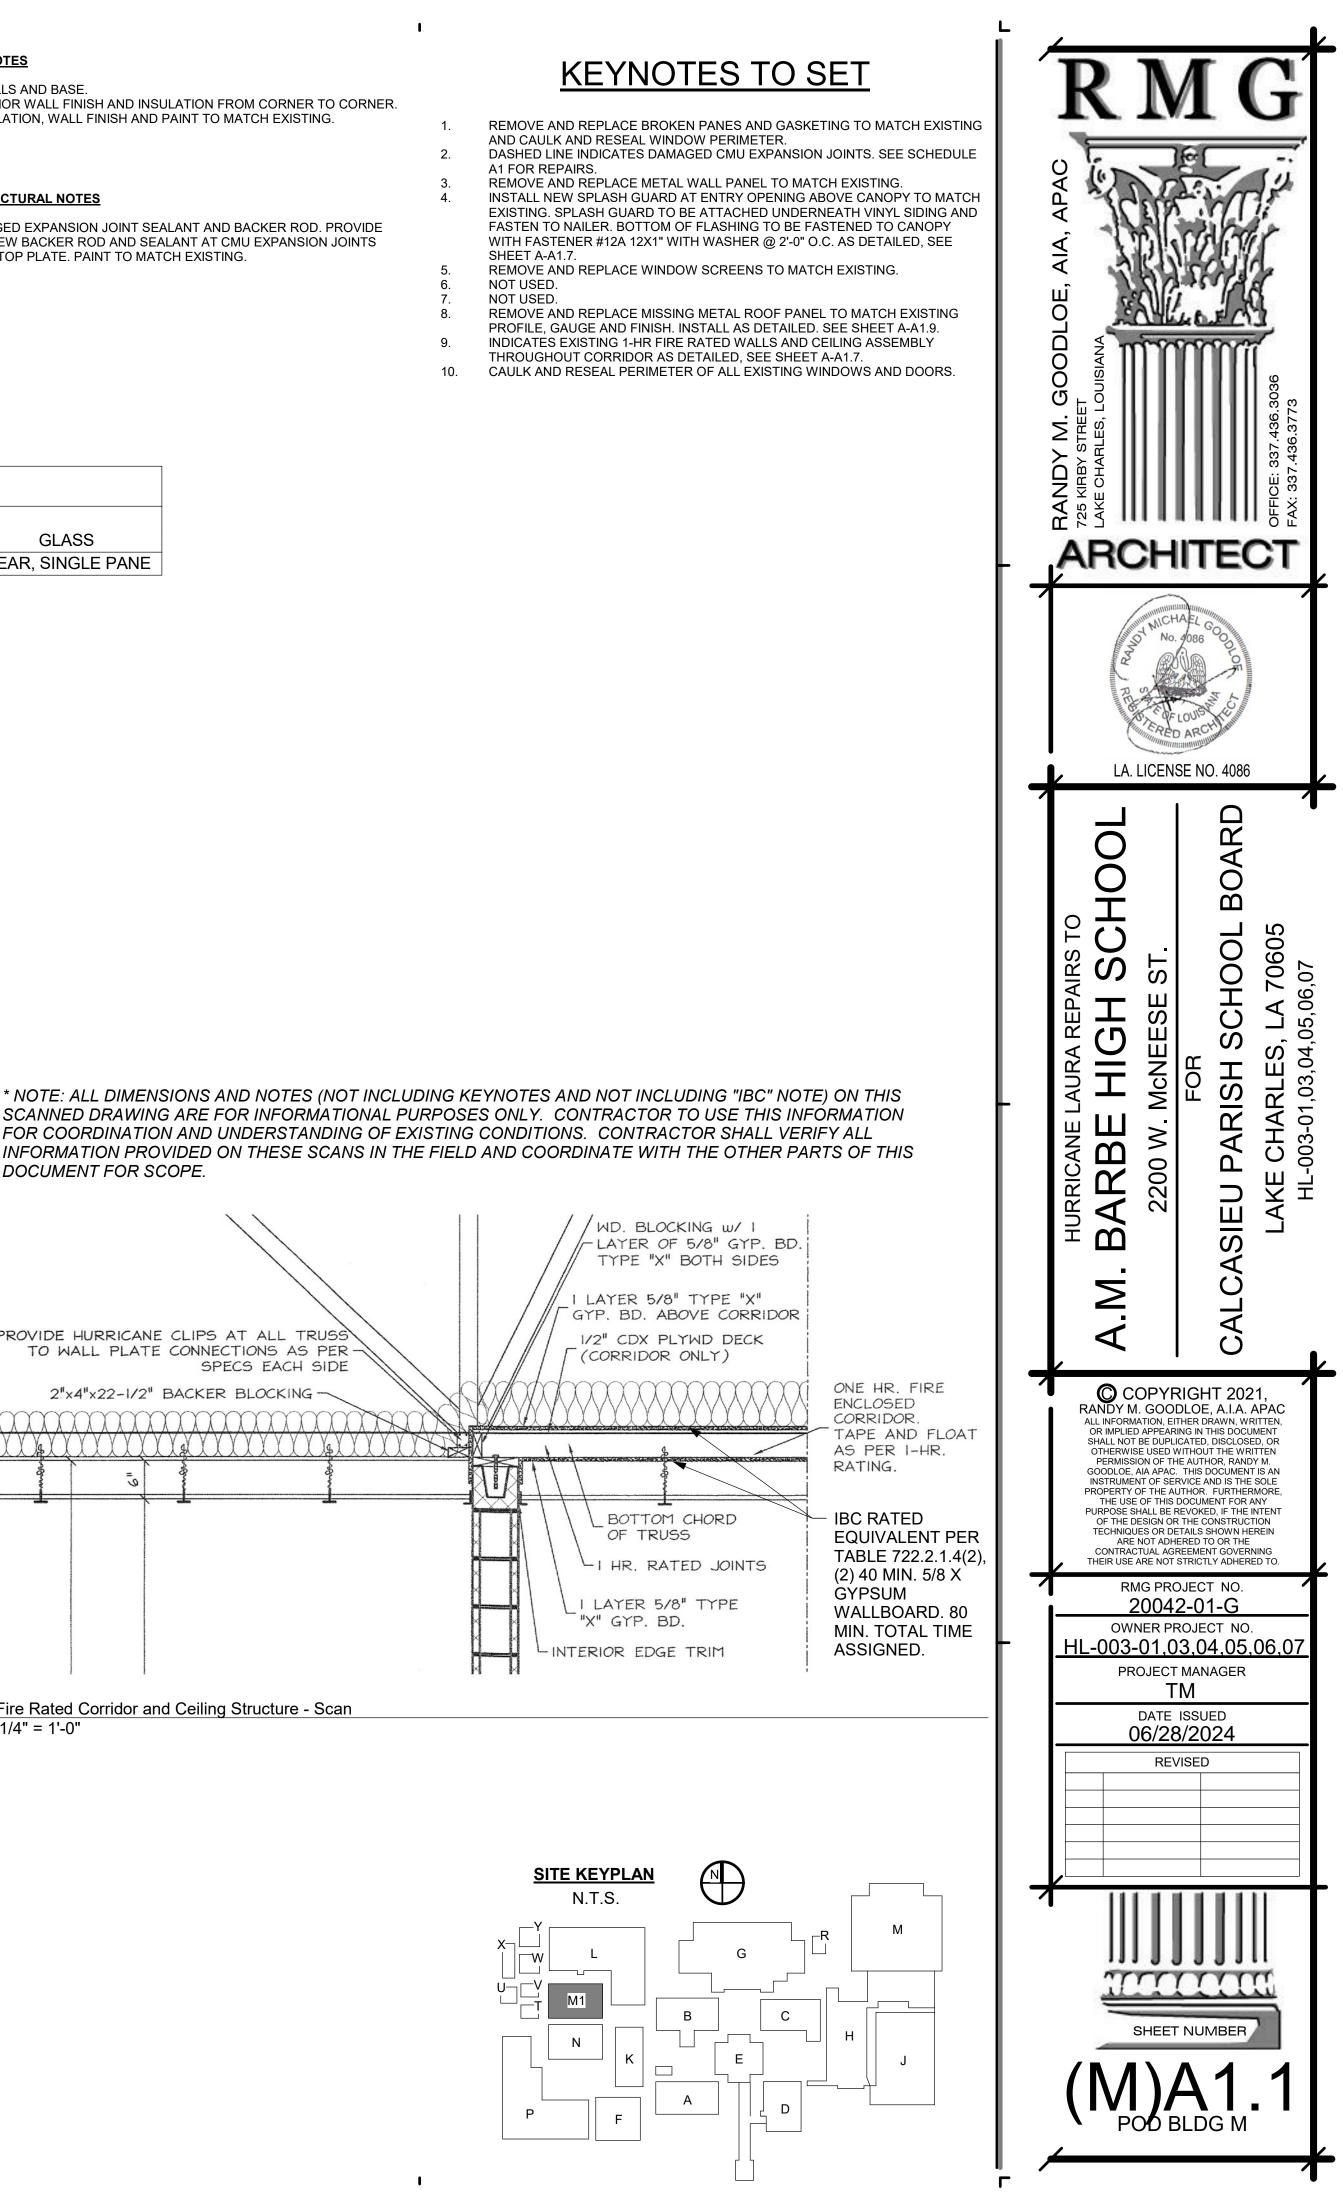


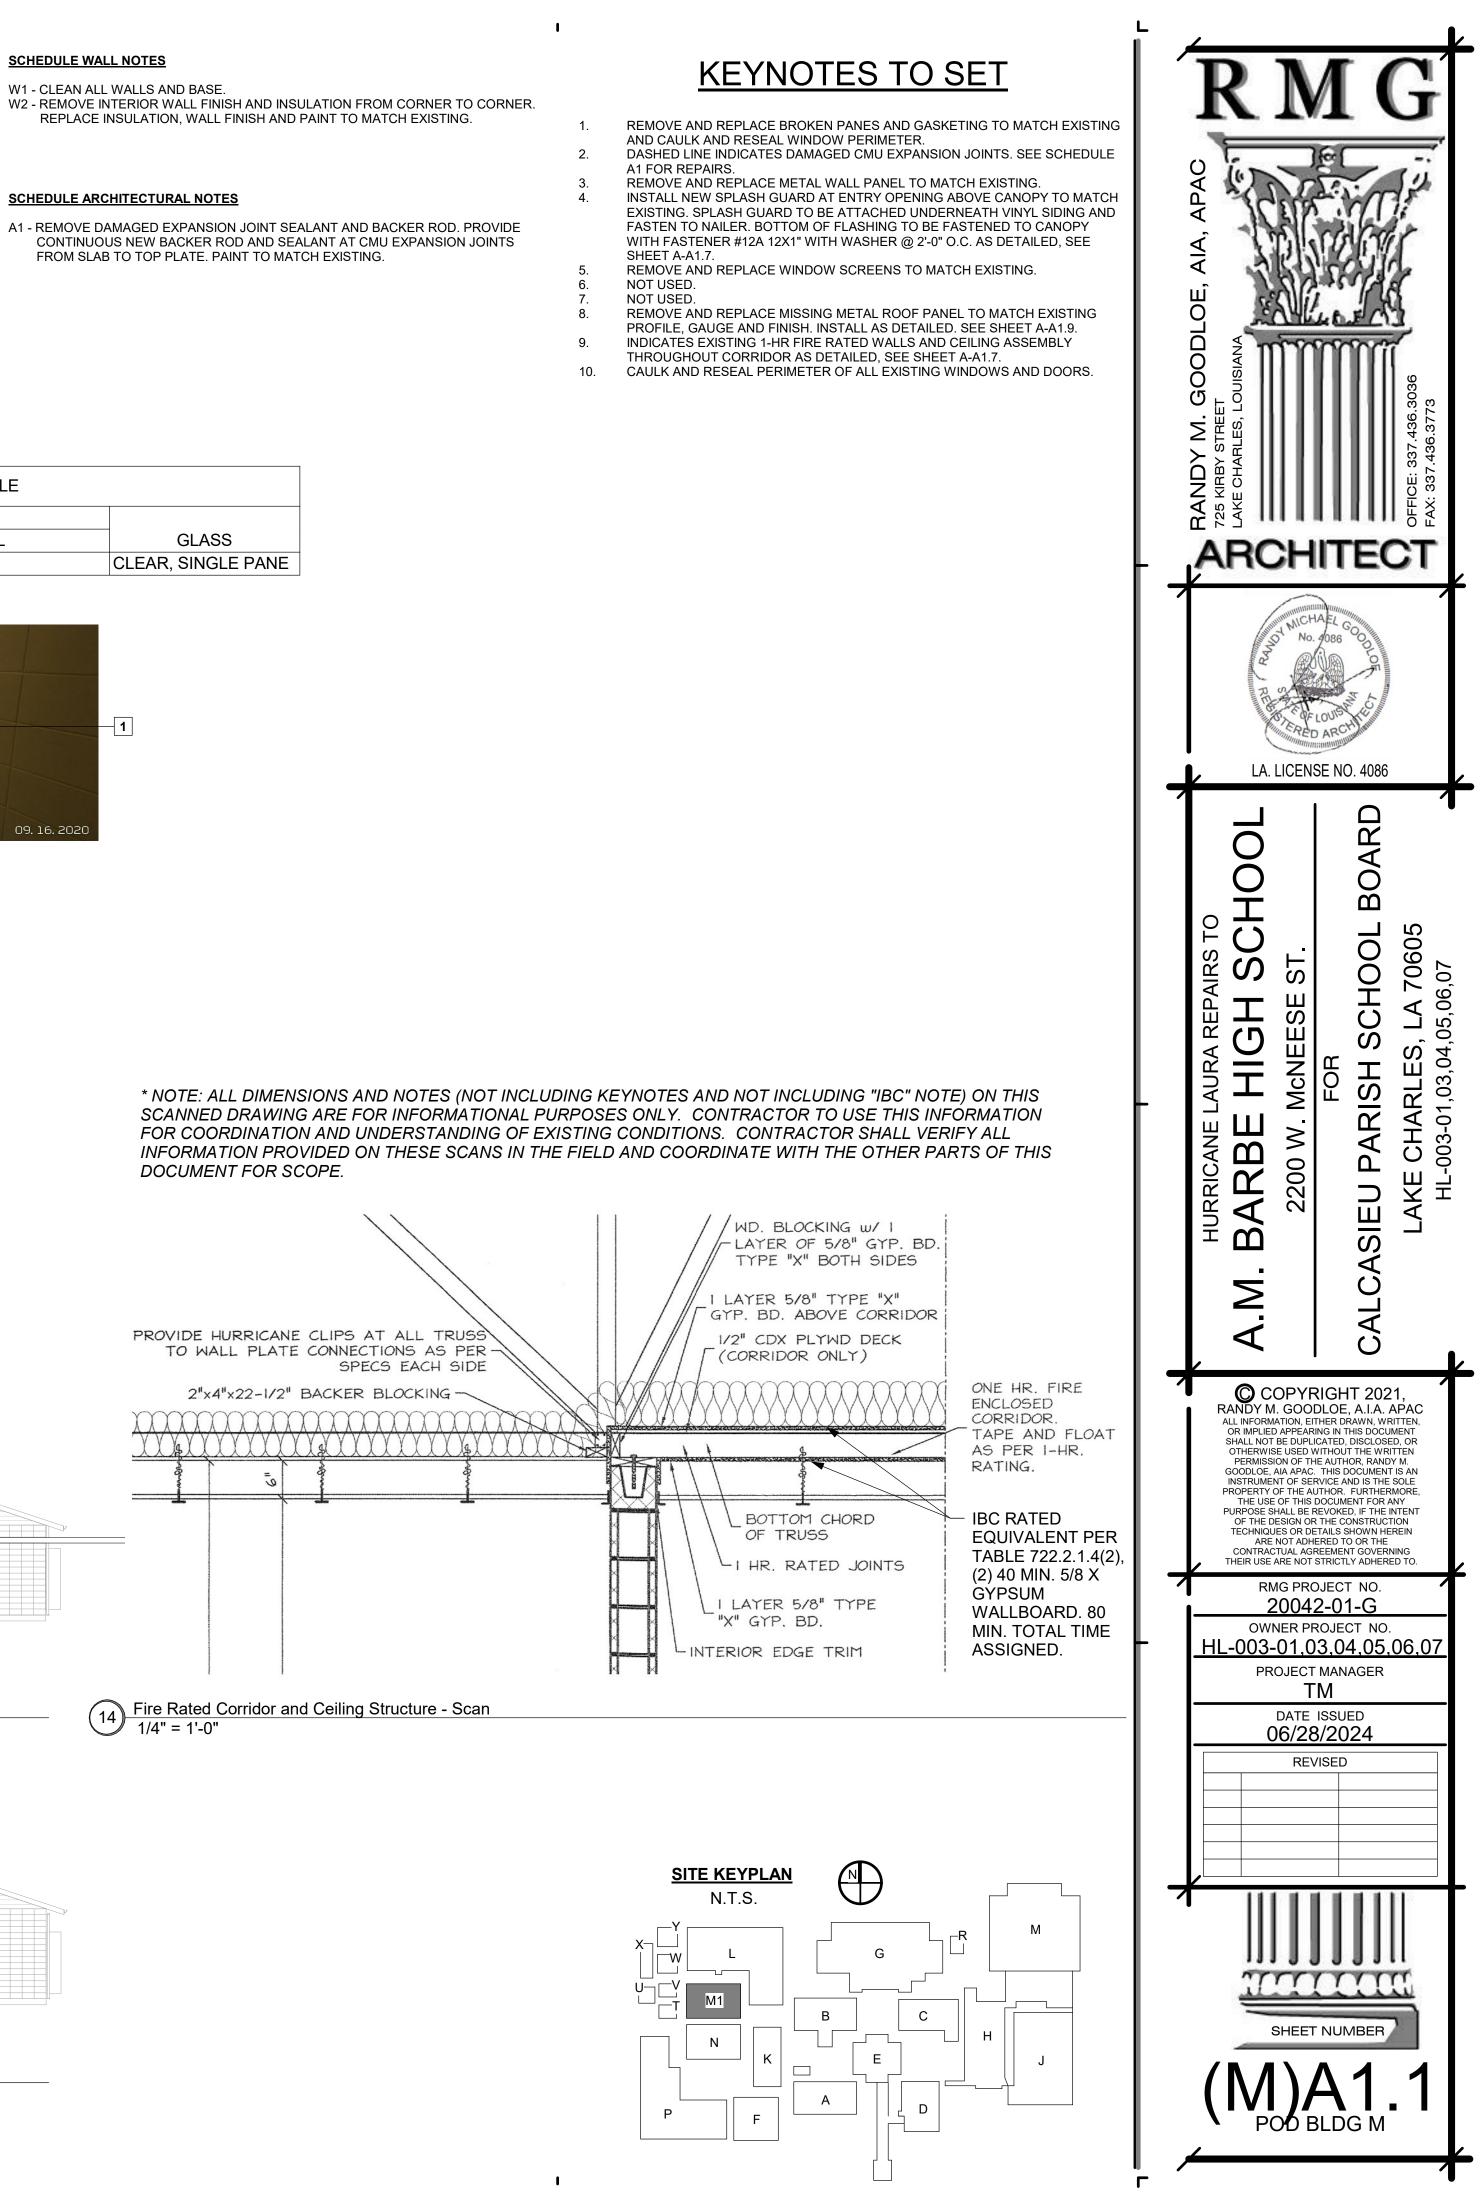


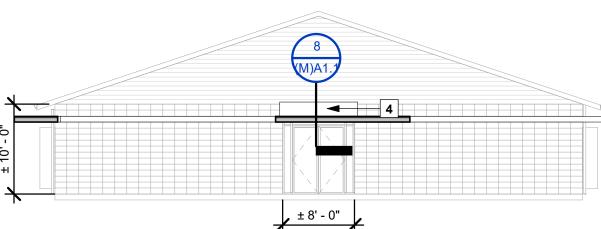




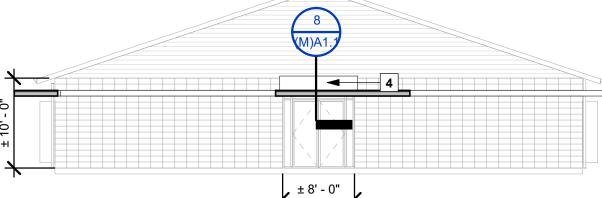


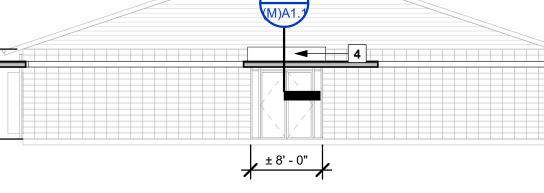


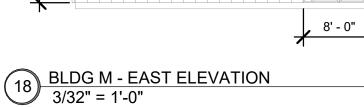

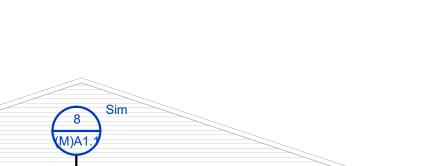








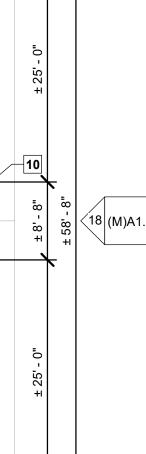

INTERIOR REPAIR LEGEND - BUILDING N							
ROOM NUMBER	Approx. Area (SF)	Approx. Perimeter (LF)	Floor	Wall	Ceiling	Other	Fire Safety
N101	746.61 SF	110.19 LF	F1	-	C1,C2, C3, C4	-	-
N102	746.58 SF	110.19 LF	F1	-	C3	-	-
N103	754.27 SF	110.83 LF	-	-	-	-	-
N104	754.24 SF	110.82 LF	F1	-	C3	-	-
N105	746.58 SF	110.19 LF	-	-	-	-	-
N106	746.55 SF	110.19 LF	F1	-	C3	-	-
N107	704.99 SF	191.63 LF	F1	-	C3, C5	-	-

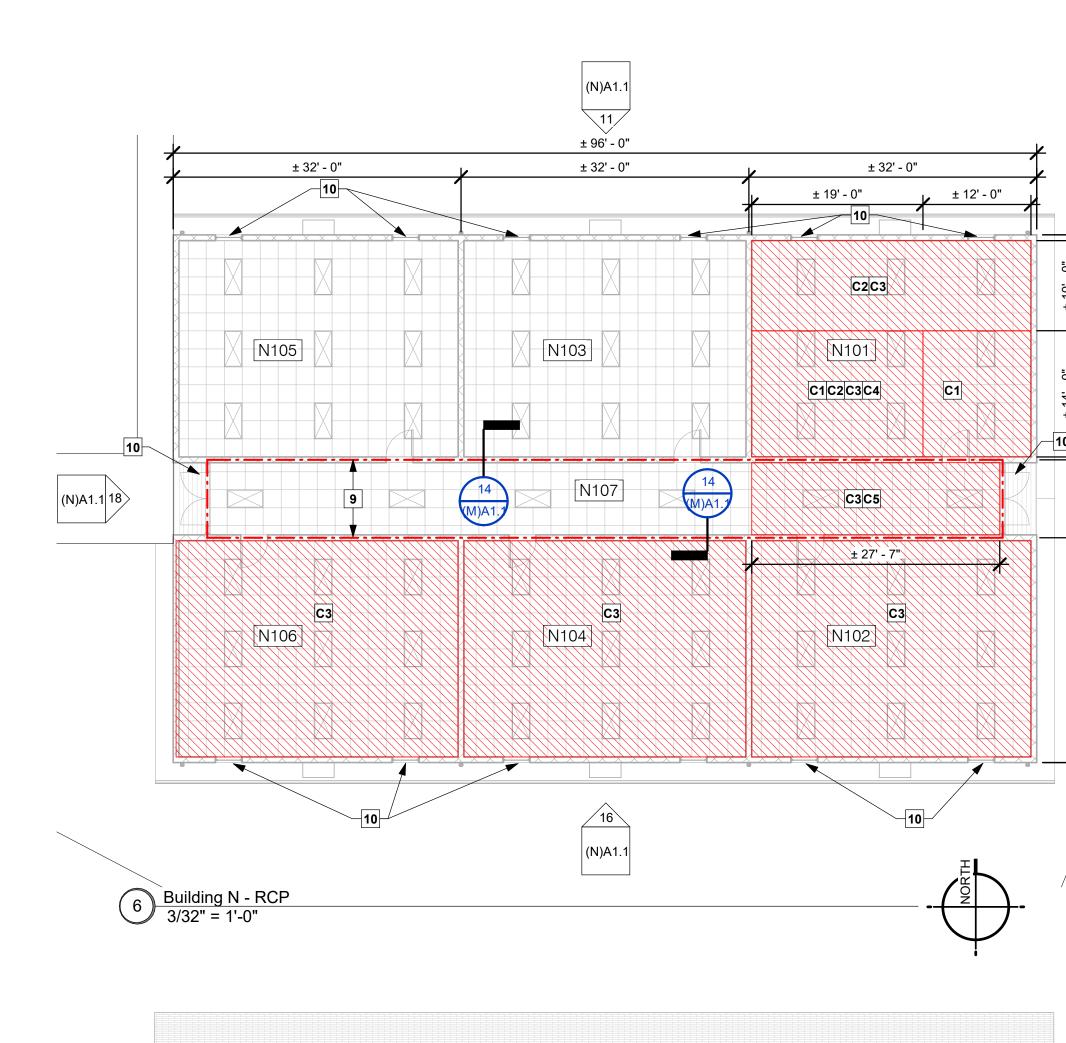



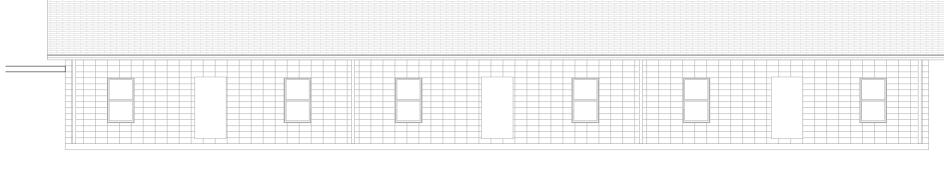

16 BLDG N - SOUTH ELEVATION 3/32" = 1'-0"

1:15:33 PM 6/27/2024

SCHEDULE FLOOR NOTES

〔2 | (N)A1.⁻

F1 - CLEAN ENTIRE VCT FLOOR, BUFF AND WAX.

F2 - HATCHED AREA INDICATES VCT FLOORING TO BE REMOVED AND REPLACED TO MATCH EXISTING. SEE UNIT PRICE NO. 3 F3 - HATCHED AREA INDICATED REPLACE MISSING VCT TO MATCH EXISTING. SEE UNIT PRICE NO. 3

F4 - REMOVE ALL WALL BASE AND REPLACE TO MATCH EXISTING.

SCHEDULE CEILING NOTES

C1 - REMOVE AND REPLACE DAMAGED CEILING TILES TO MATCH EXISTING. SEE UNIT PRICE NO. 1 C2 - REMOVE AND REPLACE DAMAGED CEILING GRID TO MATCH EXISTING. SEE UNIT

- PRICE NO. 5 C3 - HATCHED AREA INDICATES DAMAGED INSULATION TO BE REMOVED AND
- REPLACED TO MATCH EXISTING. SEE UNIT PRICE NO. 2 C4 - HATCHED AREA INDICATES DAMAGED GYPSUM CEILING TO BE REMOVED AND REPLACED.
- C5 HATCHED AREA INDICATES DAMAGED "X" GYPSUM CEILING TO BE REMOVED AND REPLACED ABOVE AND BELOW TRUSS CHORD, TAPE, FLOAT AND FIRESTOP CAULK.

SCHEDULE WALL NOTES


W1 - CLEAN ALL WALLS AND BASE. W2 - REMOVE INTERIOR WALL FINISH AND INSULATION FROM CORNER TO CORNER. REPLACE INSULATION, WALL FINISH AND PAINT TO MATCH EXISTING.

SCHEDULE ARCHITECTURAL NOTES

A1 - REMOVE DAMAGED EXPANSION JOINT SEALANT AND BACKER ROD. PROVIDE CONTINUOUS NEW BACKER ROD AND SEALANT AT CMU EXPANSION JOINTS FROM SLAB TO TOP PLATE. PAINT TO MATCH EXISTING.



18 BLDG N - WEST ELEVATION 3/32" = 1'-0"





KEYNOTES TO SET


- REMOVE AND REPLACE BROKEN PANES AND GASKETING TO MATCH EXISTING 1. AND CAULK AND RESEAL WINDOW PERIMETER.
- DASHED LINE INDICATES DAMAGED CMU EXPANSION JOINTS. SEE SCHEDULE 2. A1 FOR REPAIRS.
- REMOVE AND REPLACE METAL WALL PANEL TO MATCH EXISTING. INSTALL NEW SPLASH GUARD AT ENTRY OPENING ABOVE CANOPY TO MATCH 4. EXISTING. SPLASH GUARD TO BE ATTACHED UNDERNEATH VINYL SIDING AND FASTEN TO NAILER. BOTTOM OF FLASHING TO BE FASTENED TO CANOPY WITH FASTENER #12A 12X1" WITH WASHER @ 2'-0" O.C. AS DETAILED, SEE
- SHEET A-A1.7. REMOVE AND REPLACE WINDOW SCREENS TO MATCH EXISTING. NOT USED.
- 6. NOT USED.

5.

- REMOVE AND REPLACE MISSING METAL ROOF PANEL TO MATCH EXISTING 8. PROFILE, GAUGE AND FINISH. INSTALL AS DETAILED. SEE SHEET A-A1.9. INDICATES EXISTING 1-HR FIRE RATED WALLS AND CEILING ASSEMBLY 9.
- THROUGHOUT CORRIDOR AS DETAILED, SEE SHEET A-A1.7. CAULK AND RESEAL PERIMETER OF ALL EXISTING WINDOWS AND DOORS. 10.

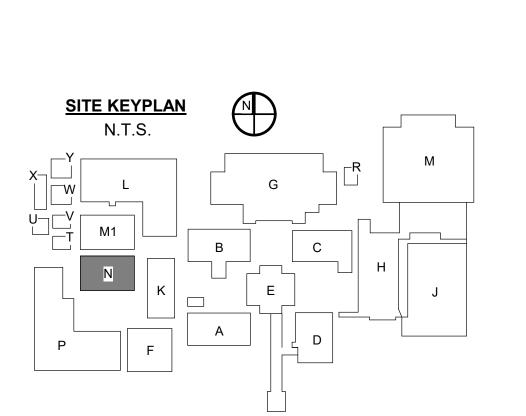

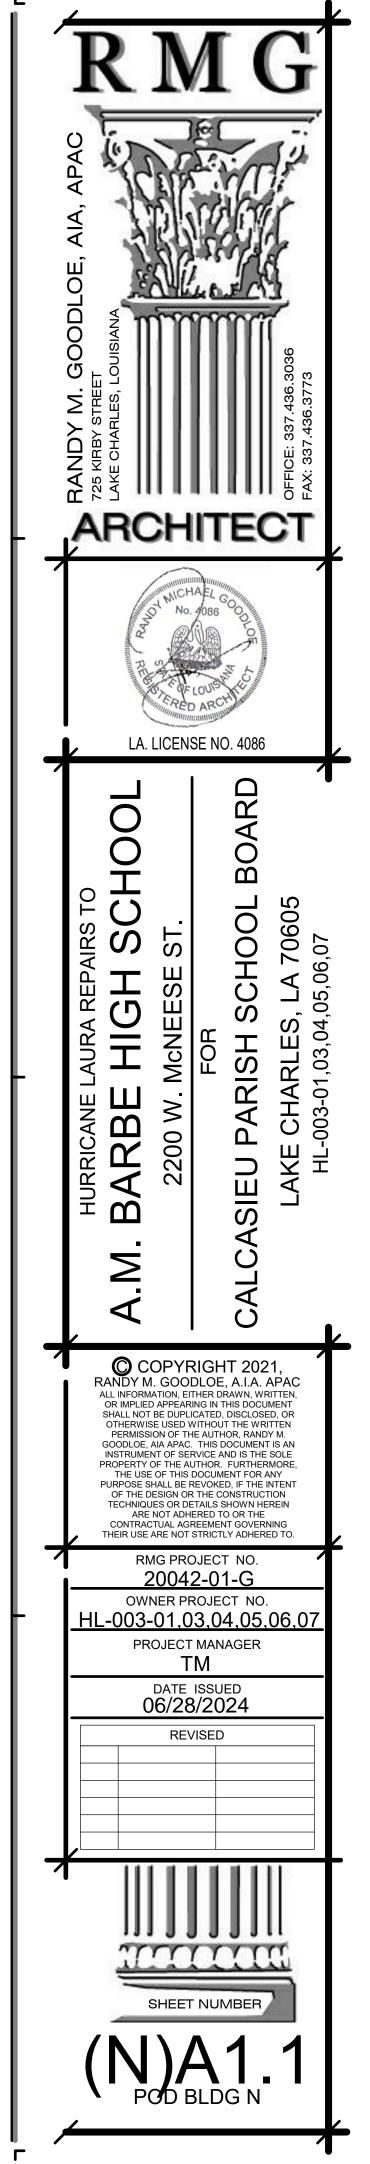


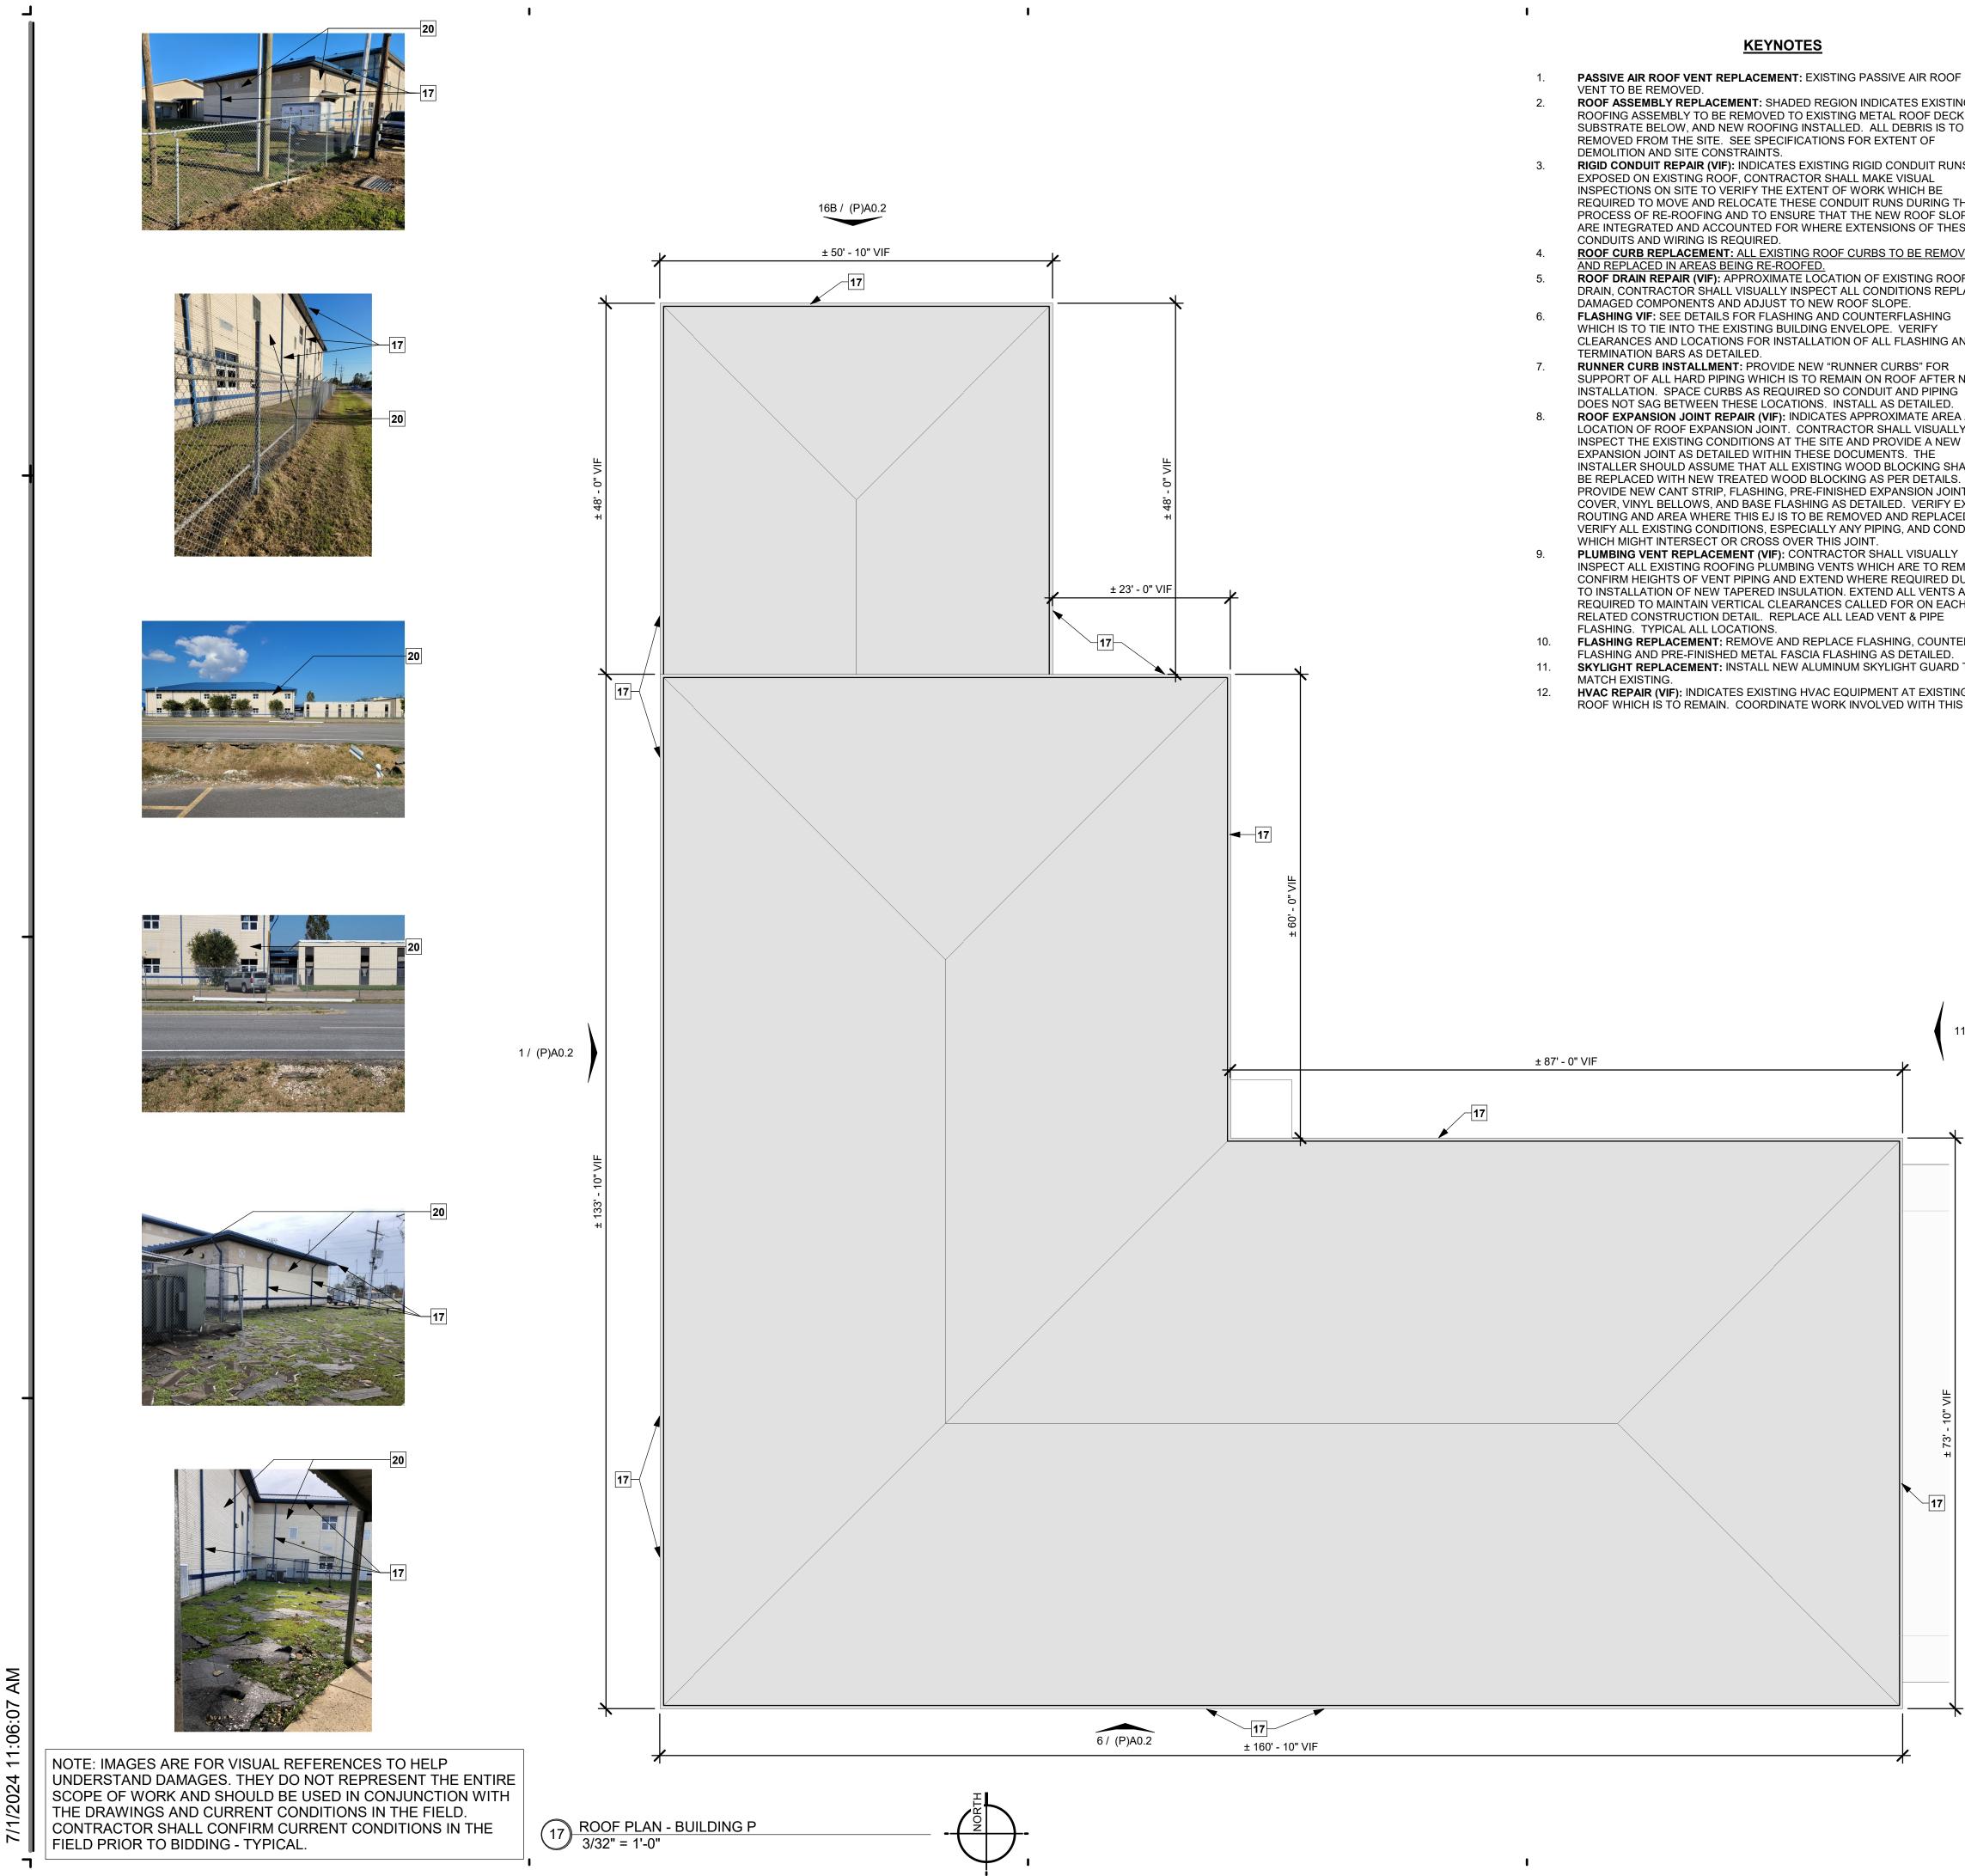


- ROOF ASSEMBLY REPLACEMENT: SHADED REGION INDICATES EXISTIN ROOFING ASSEMBLY TO BE REMOVED TO EXISTING METAL ROOF DECH SUBSTRATE BELOW, AND NEW ROOFING INSTALLED. ALL DEBRIS IS TO REMOVED FROM THE SITE. SEE SPECIFICATIONS FOR EXTENT OF
- RIGID CONDUIT REPAIR (VIF): INDICATES EXISTING RIGID CONDUIT RUN EXPOSED ON EXISTING ROOF, CONTRACTOR SHALL MAKE VISUAL INSPECTIONS ON SITE TO VERIFY THE EXTENT OF WORK WHICH BE REQUIRED TO MOVE AND RELOCATE THESE CONDUIT RUNS DURING PROCESS OF RE-ROOFING AND TO ENSURE THAT THE NEW ROOF SLO ARE INTEGRATED AND ACCOUNTED FOR WHERE EXTENSIONS OF THE
- ROOF CURB REPLACEMENT: ALL EXISTING ROOF CURBS TO BE REMO
- DRAIN, CONTRACTOR SHALL VISUALLY INSPECT ALL CONDITIONS REPL
- WHICH IS TO TIE INTO THE EXISTING BUILDING ENVELOPE. VERIFY CLEARANCES AND LOCATIONS FOR INSTALLATION OF ALL FLASHING A
- SUPPORT OF ALL HARD PIPING WHICH IS TO REMAIN ON ROOF AFTER I INSTALLATION. SPACE CURBS AS REQUIRED SO CONDUIT AND PIPING
- ROOF EXPANSION JOINT REPAIR (VIF): INDICATES APPROXIMATE AREA LOCATION OF ROOF EXPANSION JOINT. CONTRACTOR SHALL VISUALL INSPECT THE EXISTING CONDITIONS AT THE SITE AND PROVIDE A NEW EXPANSION JOINT AS DETAILED WITHIN THESE DOCUMENTS. THE INSTALLER SHOULD ASSUME THAT ALL EXISTING WOOD BLOCKING SH BE REPLACED WITH NEW TREATED WOOD BLOCKING AS PER DETAILS PROVIDE NEW CANT STRIP, FLASHING, PRE-FINISHED EXPANSION JOIN COVER, VINYL BELLOWS, AND BASE FLASHING AS DETAILED. VERIFY EX ROUTING AND AREA WHERE THIS EJ IS TO BE REMOVED AND REPLACI VERIFY ALL EXISTING CONDITIONS, ESPECIALLY ANY PIPING, AND CONI
- PLUMBING VENT REPLACEMENT (VIF): CONTRACTOR SHALL VISUALLY INSPECT ALL EXISTING ROOFING PLUMBING VENTS WHICH ARE TO REM CONFIRM HEIGHTS OF VENT PIPING AND EXTEND WHERE REQUIRED D TO INSTALLATION OF NEW TAPERED INSULATION. EXTEND ALL VENTS REQUIRED TO MAINTAIN VERTICAL CLEARANCES CALLED FOR ON EAC RELATED CONSTRUCTION DETAIL. REPLACE ALL LEAD VENT & PIPE
- FLASHING REPLACEMENT: REMOVE AND REPLACE FLASHING, COUNTE FLASHING AND PRE-FINISHED METAL FASCIA FLASHING AS DETAILED. SKYLIGHT REPLACEMENT: INSTALL NEW ALUMINUM SKYLIGHT GUARD
- HVAC REPAIR (VIF): INDICATES EXISTING HVAC EQUIPMENT AT EXISTIN


11/ (P)A0.2


	I			1	
				DN	
OF TING		EQUIPMENT AND NEW ROOFING ASSEMBLY SO AS TO NOT DISRUPT SERVICE TO THE EXISTING BUILDING. IF SERVICE IS REQUIRED TO BE TEMPORARILY SUSPENDED WHILE NEW WORK IS TAKING PLACE, THE CONTRACTOR SHALL		<u>r</u> N	IG
CKING TO BE		COORDINATE ANY AND ALL OUTAGES WITH THE OWNER AND WILL BE REQUIRED TO ONLY PERFORM THIS WORK AT TIMES WHEN SUSPENSION OF THIS SERVICE MINIMALLY AFFECTS THE OWNERS USE OF THE BUILDING. IF THE SERVICE		AC AC	
UNS		CANNOT BE SUSPENDED DURING OWNER'S OPERATING HOURS, WORK MAY HAVE TO BE PERFORMED AFTER HOURS, OR ON WEEKENDS.		APA LUN	M
THE LOPES	13. 14.	SATELLITE INSTALLATION: SEE DETAILS FOR SATELLITE MOUNTING UNIT. "A" METAL PANEL REPLACEMENT: METAL WALL PANEL "E" - REMOVE AND REPLACE DAMAGED/MISSING METAL WALL PANEL AS SPECIFIED. SEE BUILDING ELEVATIONS.		AIA,	CE GUE
IESE	15. 16.	ELEVATIONS. SIGNAGE INSTALLATION: INSTALL MISSING LETTERING TO MATCH EXISTING. ROOF ACCESSORY REPLACEMENT: REPLACE DAMAGED ROOF ACCESSORIES. MATCH EXISTING TYPE, MATERIAL, AND STYLE.			1716
DOF PLACE	17.	DOWNSPOUT AND GUTTER CLEANING: DOWNSPOUT/COLLECTOR LOCATIONS, SEE ELEVATIONS. CONTRACTOR IS TO REMOVE ALL DEBRIS FROM GUTTERS AND DOWN SPOUTS.			
3	18.	SATELLITE REMOVAL: REMOVE ALL SATELLITE COMPONENTS. THESE ARE NO LONGER IN USE.			39
AND	19.	COPING: SEE ROOFING SHEETS FOR COPING, OVERHANG & ROOFING SCOPES - TYP.		<u> </u>	436.3C
R NEW	20.	TEMPORARY CHAIN LINK FENCING - PROVIDE 6' TEMPORARY CHAIN LINK FENCING TO PROTECT STUDENT TRAFFIC DURING CONSTRUCTION. PROVIDE ACCESS TO THE GREATEST EXTENT POSSIBLE. COORDINATE WITH PHASING AND SCHOOL			337.43 7.436.3
). EA AND	21.	PRINCIPAL. WIND TURBINE REPLACEMENT: REMOVE AND REPLACE WIND TURBINE TO MATCH			: 33 : 33
LLY EW	22.	EXISTING. PAINTING EXTERIOR: CLEAN, PREP & RE-PAINT WALLS AND ARTWORK TO COVER SCUFFS AND DAMAGE FROM STORM DEBRIS. COLOR TO MATCH EXISTING AS ADDROVED BY ADDULTECT			
SHALL S.	23.	APPROVED BY ARCHITECT. GLASS REPLACEMENT: REMOVE AND REPLACE DAMAGED GLASS (OR PLYWOOD WHERE APPLICABLE) TO MATCH EXISTING. PROVIDE CAULKING AND GASKETING.		ARCH	IIECI
NNT Ý EXACT	24.	STUCCO SOFFIT REPLACEMENT: SOFFIT REMOVED BY OTHERS (HAZARDOUS MATERIAL). COORDINATE AND INSTALL NEW STUCCO SOFFIT.	7		No VILLIANDING
CED, NDUIT	25.	COORDINATE REMOVAL OF <u>AGGREGATE PANELS (HAZARDOUS MATERIAL)</u> WITH ABATEMENT SCOPE AND ABATEMENT CONTRACTOR. COORDINATE AND INSTALL NEW GFRC FACADE PANELS AS SPECIFIED. REMOVE AND REPLACE DAMAGED		AND NO.	AEL GO
.Y EMAIN. DUE S AS	26.	WALL FRAMING - SEE STRUCTURAL AND WALL SECTIONS. SALVAGE AND REINSTALL MEP COMPONENTS AT SAME LOCATIONS - COORDINATE WITH MEP. DOWNSPOUT AND GUTTER REPLACEMENT: REMOVE REMAINING ATTACHMENTS		REAL	ST A
кСН		AND COMPONENTS OF DOWNSPOUT, GUTTER AND CONDUCTOR HEADS AND INSTALL NEW TO MATCH EXISTING COLOR, DIMENSION, GAUGE, AND MATERIAL. GROUT HOLES AT OLD STRAPS PRIOR TO NEW INSTALLATION & ATTACH AT INTERVALS FOUND TO EXISTING SPACING, SALVAGE AND DREP DEMAINING		Contraction of the second seco	ARCHIT
TER-).		INTERVALS EQUAL TO EXISTING SPACING. SALVAGE AND PREP REMAINING COMPONENTS FOR NEW INSTALLATION. CONTRACTOR IS TO REMOVE ALL DEBRIS		LA. LICENS	SE NO. 4086
RD TO	27.	FROM GUTTERS AND DOWN SPOUTS. BRICK REPAIR: REMOVE AND REPLACE BRICK FACADE AS INDICATED. DISPOSE OF OLD BRICK, MATCH NEW BRICK AND MORTAR TO EXISTING AS APPROVED BY	-		
'ING HS		ARCHITECT. PRESERVE SUBSTRATE. REMOVE OLD BRICK TIES AND WATER PROOFING, INSTALL NEW WATERPROOFING AND BRICK TIES AT A MIN. OF 24" O.C. VERTICAL AND HORIZONTAL			ARD
	28.	PLASTER SOFFIT REPLACEMENT: REMOVE REMAINING VINYL SOFFIT AND REPLACE TO MATCH EXISTING - PRESERVE LIGHT & REINSTALL AS NECESSARY.		Ō	BOAR
				AIRS 1 SC	HOOL A 70605

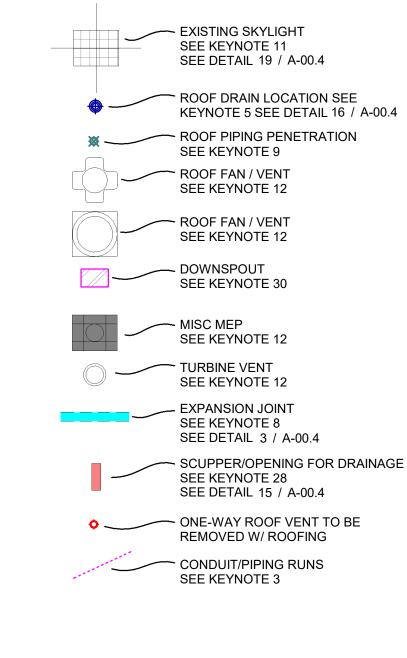


ROOFING SYMBOL LEGEND

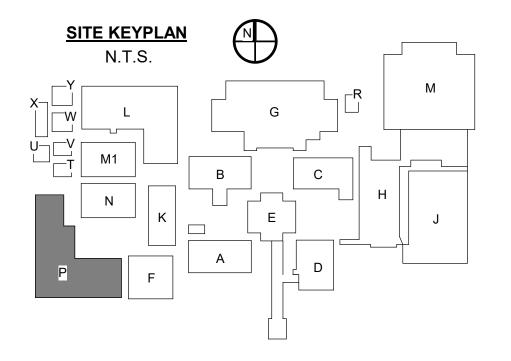


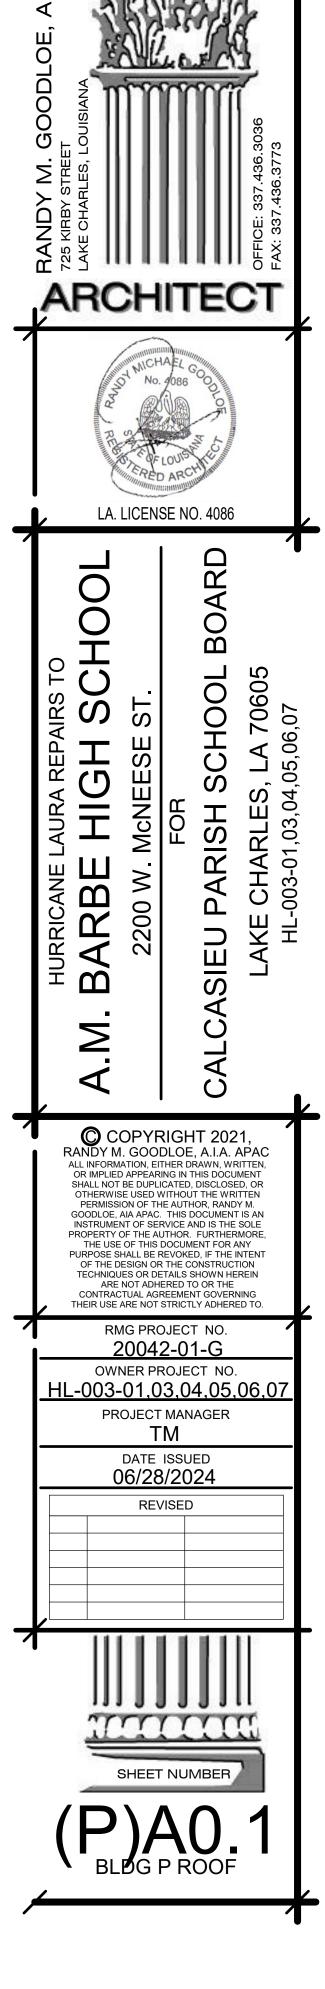


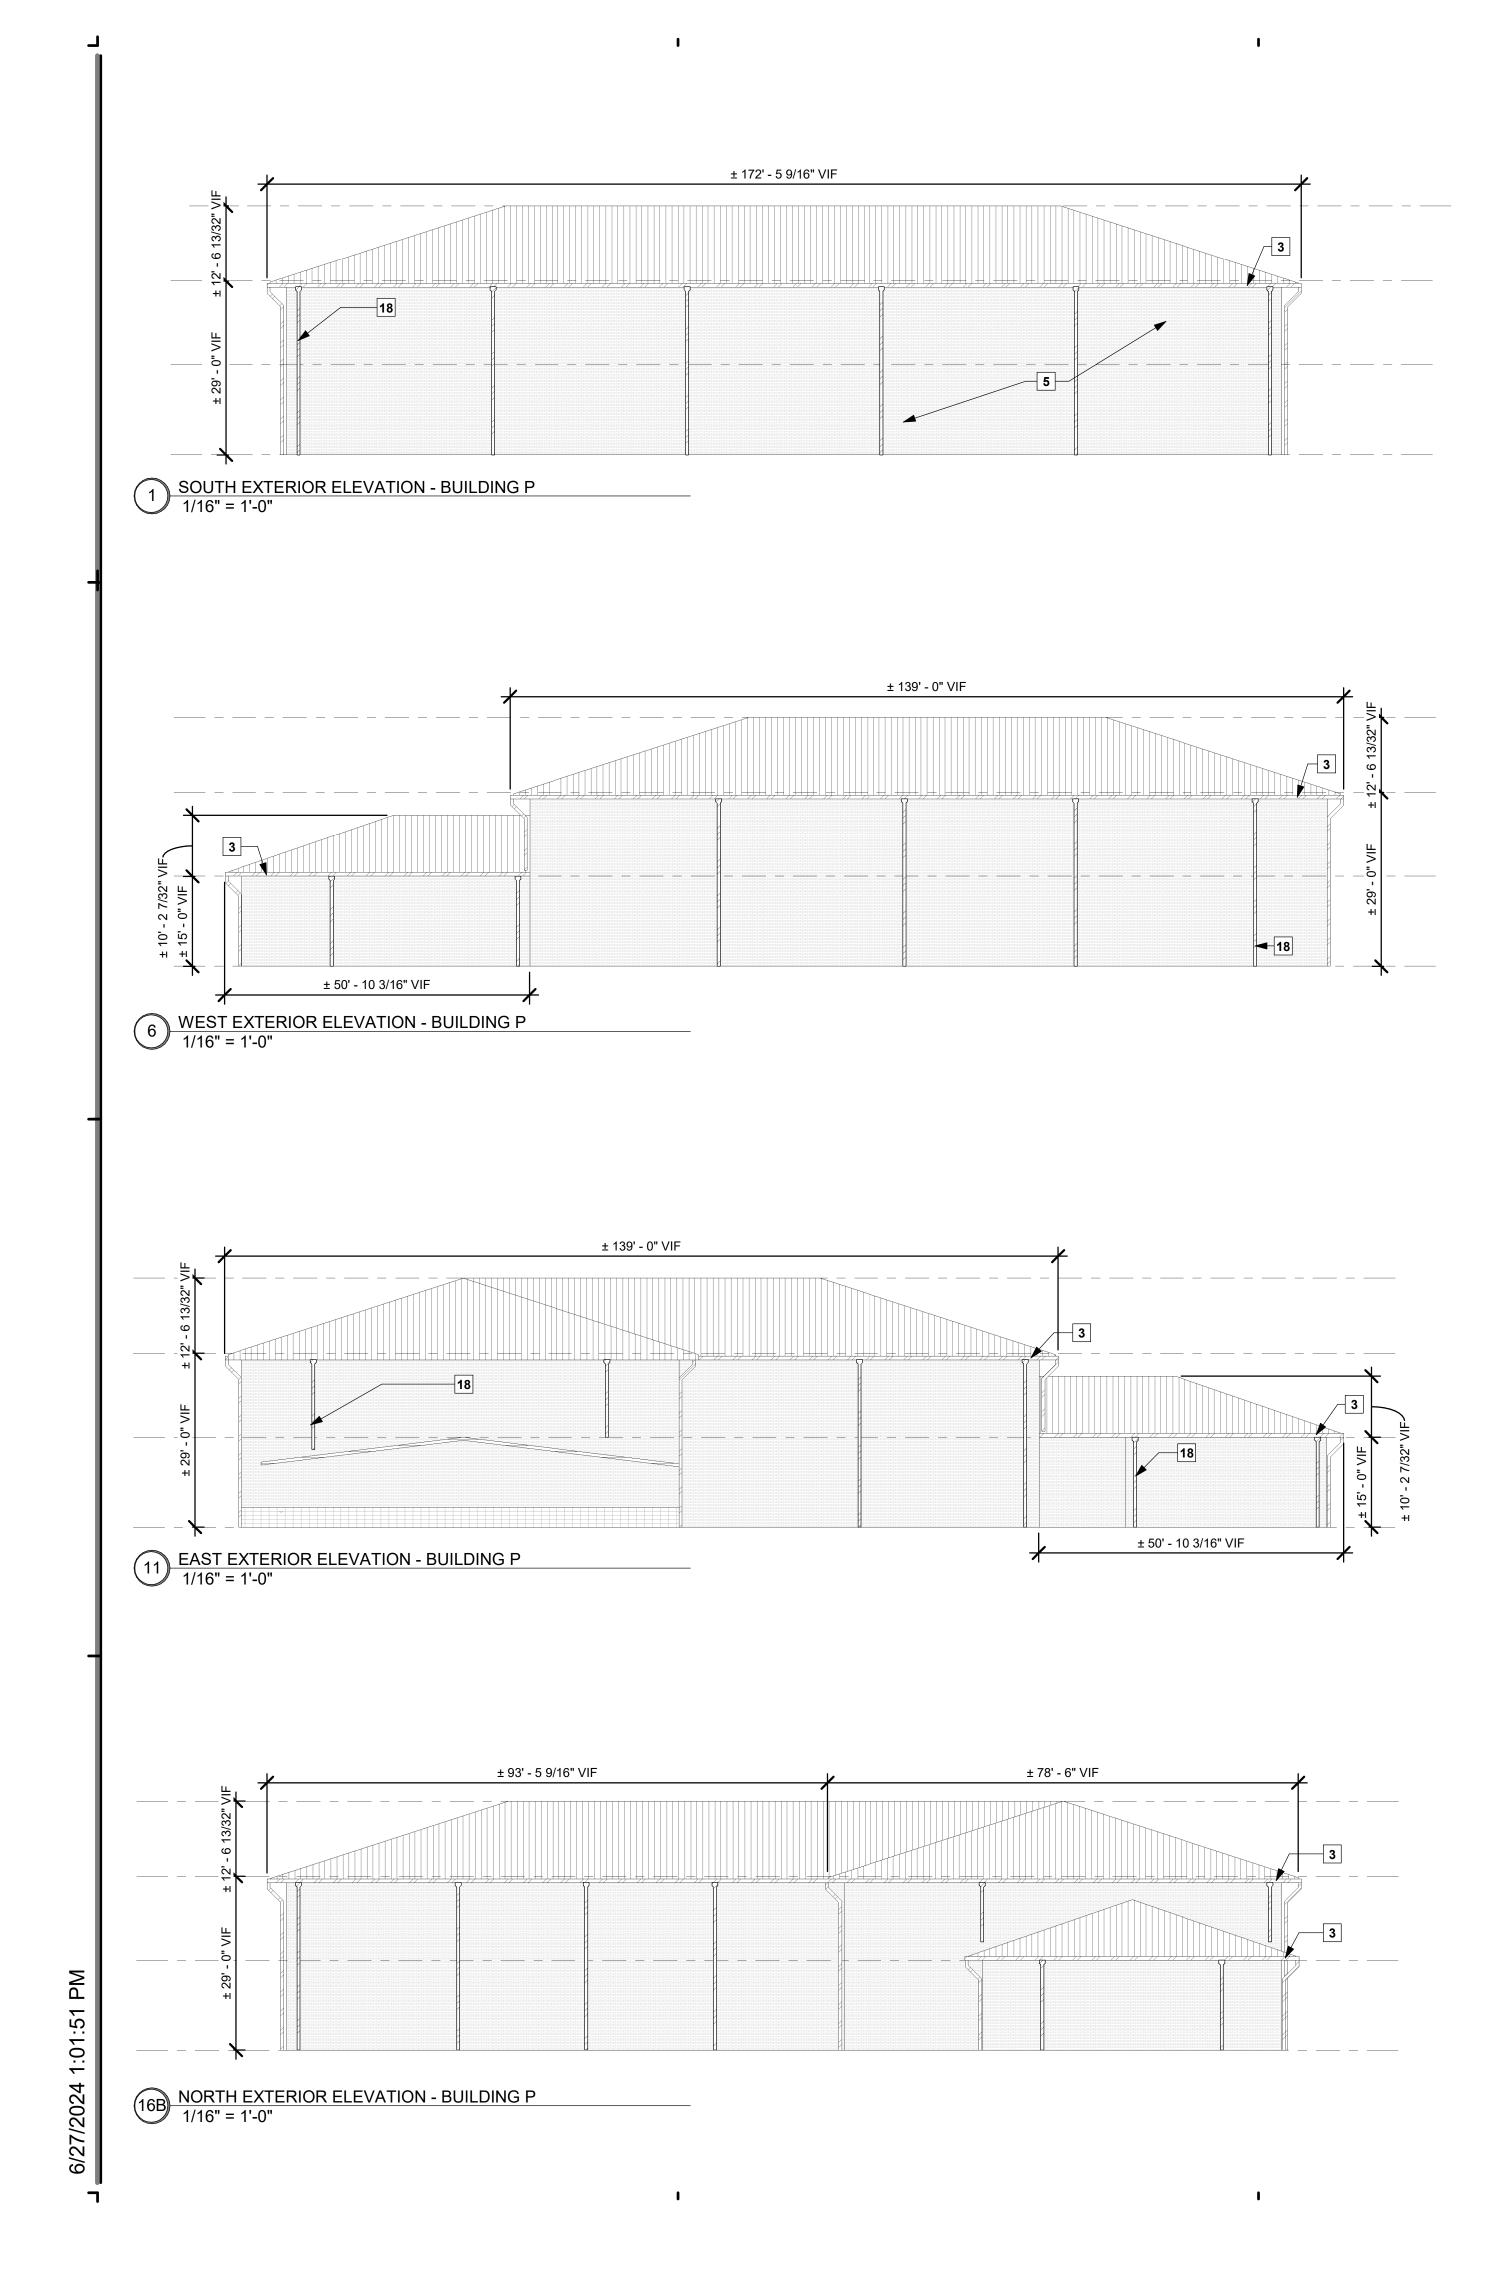





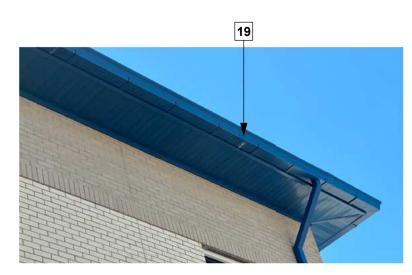


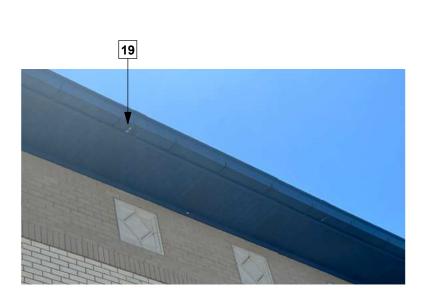


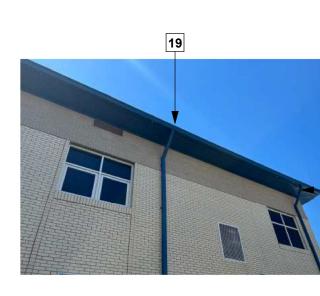

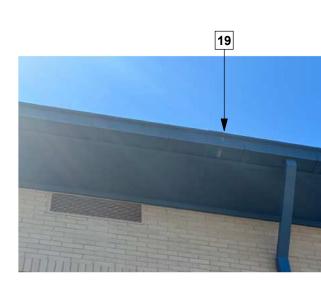

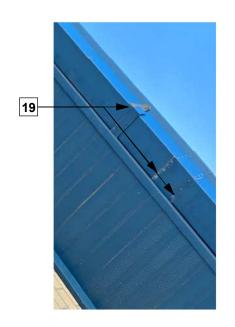

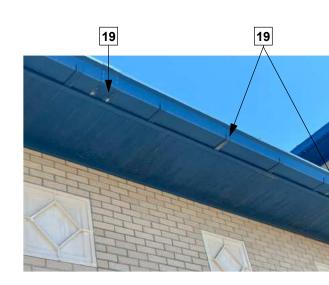

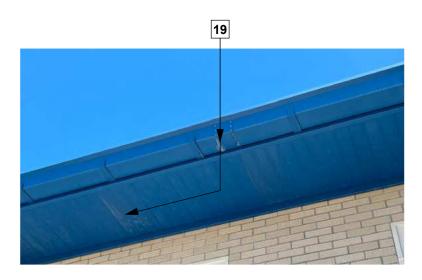




<u>KEYNOTES</u>


- 1. **"A" METAL PANEL REPLACEMENT:** METAL WALL PANEL "A" REMOVE AND REPLACE DAMAGED/MISSING METAL WALL PANEL AS SPECIFIED. SEE BUILDING ELEVATIONS.
- SIGNAGE INSTALLATION: INSTALL MISSING LETTERING TO MATCH EXISTING. DOWNSPOUT AND GUTTER REPLACEMENT: REMOVE REMAINING ATTACHMENTS AND COMPONENTS OF DOWNSPOUT, GUTTER AND CONDUCTOR HEADS AND INSTALL NEW TO MATCH EXISTING COLOR, DIMENSION, GAUGE, AND MATERIAL. GROUT HOLES AT OLD STRAPS PRIOR TO NEW INSTALLATION & ATTACH AT INTERVALS EQUAL TO EXISTING SPACING. SALVAGE AND PREP REMAINING COMPONENTS FOR NEW INSTALLATION. CONTRACTOR IS TO REMOVE ALL DEBRIS FROM GUTTERS AND DOWN SPOUTS.
- **COPING:** SEE ROOFING SHEETS FOR COPING, OVERHANG & ROOFING SCOPES -TYP.
- EXISTING LIGHT FIXTURE CONTRACTOR IS TO WEATHER SEAL FIXTURE AT METAL WALL PANEL. NOT USED.
- **BRICK REPAIR:** REMOVE AND REPLACE BRICK FACADE AS INDICATED. DISPOSE OF OLD BRICK, MATCH NEW BRICK AND MORTAR TO EXISTING AS APPROVED BY ARCHITECT. PRESERVE SUBSTRATE. REMOVE OLD BRICK TIES AND WATER PROOFING, INSTALL NEW WATERPROOFING AND BRICK TIES AT A MIN. OF 24" O.C. VERTICAL AND HORIZONTAL **PAINTING EXTERIOR:** CLEAN, PREP & RE-PAINT WALLS AND ARTWORK TO
- PAINTING EXTERIOR: CLEAN, PREP & RE-PAINT WALLS AND ARTWORK TO COVER SCUFFS AND DAMAGE FROM STORM DEBRIS. COLOR TO MATCH EXISTING AS APPROVED BY ARCHITECT.
 GLASS REPLACEMENT: REMOVE AND REPLACE DAMAGED GLASS (OR
- PLYWOOD WHERE APPLICABLE) TO MATCH EXISTING. PROVIDE CAULKING AND GASKETING.
- 10. **STUCCO SOFFIT REPLACEMENT:** SOFFIT REMOVED BY OTHERS (HAZARDOUS MATERIAL). COORDINATE AND INSTALL NEW STUCCO SOFFIT.
- 11. **AGGREGATE PANEL REPLACEMENT:** DELAMINATED & DAMAGED AGGREGATE PANELS REMOVED BY OTHERS (HAZARDOUS MATERIAL). COORDINATE AND INSTALL NEW FACADE PANEL AS SPECIFIED. REINSTALL MEP COMPONENTS AT SAME LOCATIONS.
- CONDUIT REPAIR: REPAIR CONDUIT AND MEP EQUIPMENT TO WORKING ORDER PER MEP DOCUMENTS.
 GLAZING REPLACEMENT: REMOVE DAMAGED GLAZING SYSTEM AND
- GLAZING REPLACEMENT: REMOVE DAMAGED GLAZING SYSTEM AND REPLACE WITH NEW TO MATCH EXISTING AS SPECIFIED. PROVIDE NEW CONTINUOUS 4X4 STEEL ANGLE WELDED TO STRUCTURE FOR SUPPORT.
 DOOR REPLACEMENT: REMOVE REMAINING DOOR DEBRIS AND COVERINGS
- AND REPLACE TO MATCH EXISTING, INCLUDING FRAMES, HARDWARE, AND GASKETING. SEE DOOR SCHEDULE.
 15. METAL PANEL REPLACEMENT: REMOVE REMAINING DAMAGED METAL PANEL ASSEMBLY AND REPLACE WITH NEW SYSTEM TO MATCH EXISTING.
- COORDINATE REMOVAL AND INSTALLATION TO PREVENT WEATHER INTRUSION.
 SOFFIT PANEL REPLACEMENT: REMOVE AND REPLACE SOFFIT PANELS TO
- MATCH EXISTING APPROX. 3'X3' PANELS.
 17. GLASS AND GLAZING REPLACEMENT: REMOVE AND DISPOSE OF MESH, BROKEN & REMAINING GLASS AND GLAZING - REPLACE WITH SOLID PANELS
- AS SPECIFIED.
 18. DOWNSPOUT AND GUTTER CLEANING: DOWNSPOUT/COLLECTOR LOCATIONS. CONTRACTOR IS TO REMOVE ALL DEBRIS FROM GUTTERS AND DOWN SPOUTS.
- 19. GUTTER REPAIR RESEAL ALL JOINTS; PROVIDE ALL RIVETS




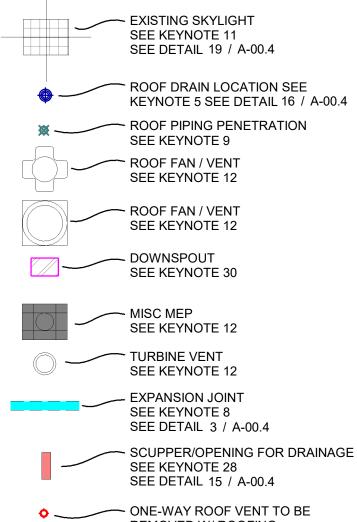


ROOFING SYMBOL LEGEND


CONDUIT/PIPING RUNS SEE KEYNOTE 3

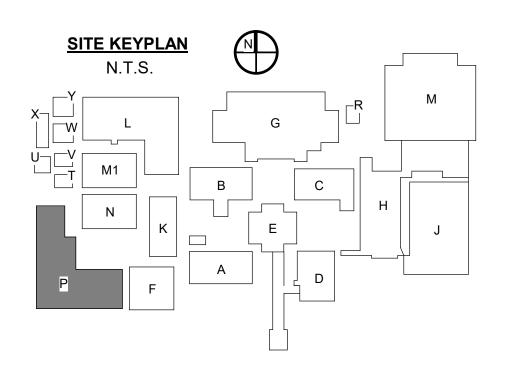


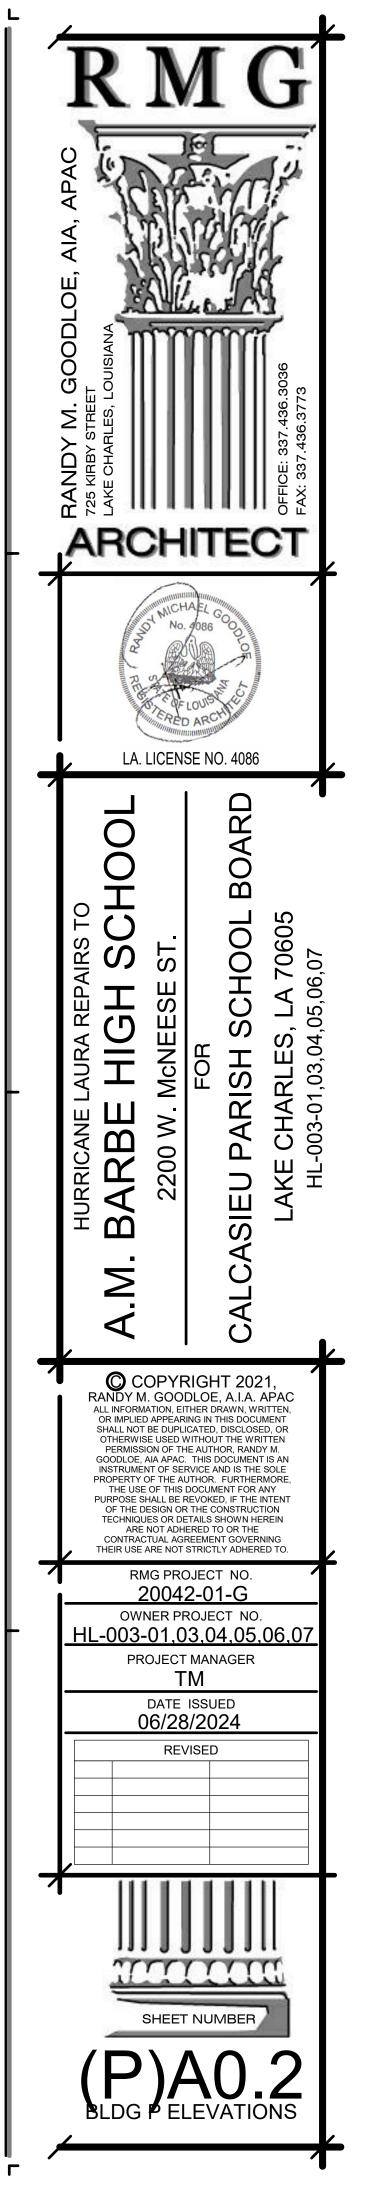


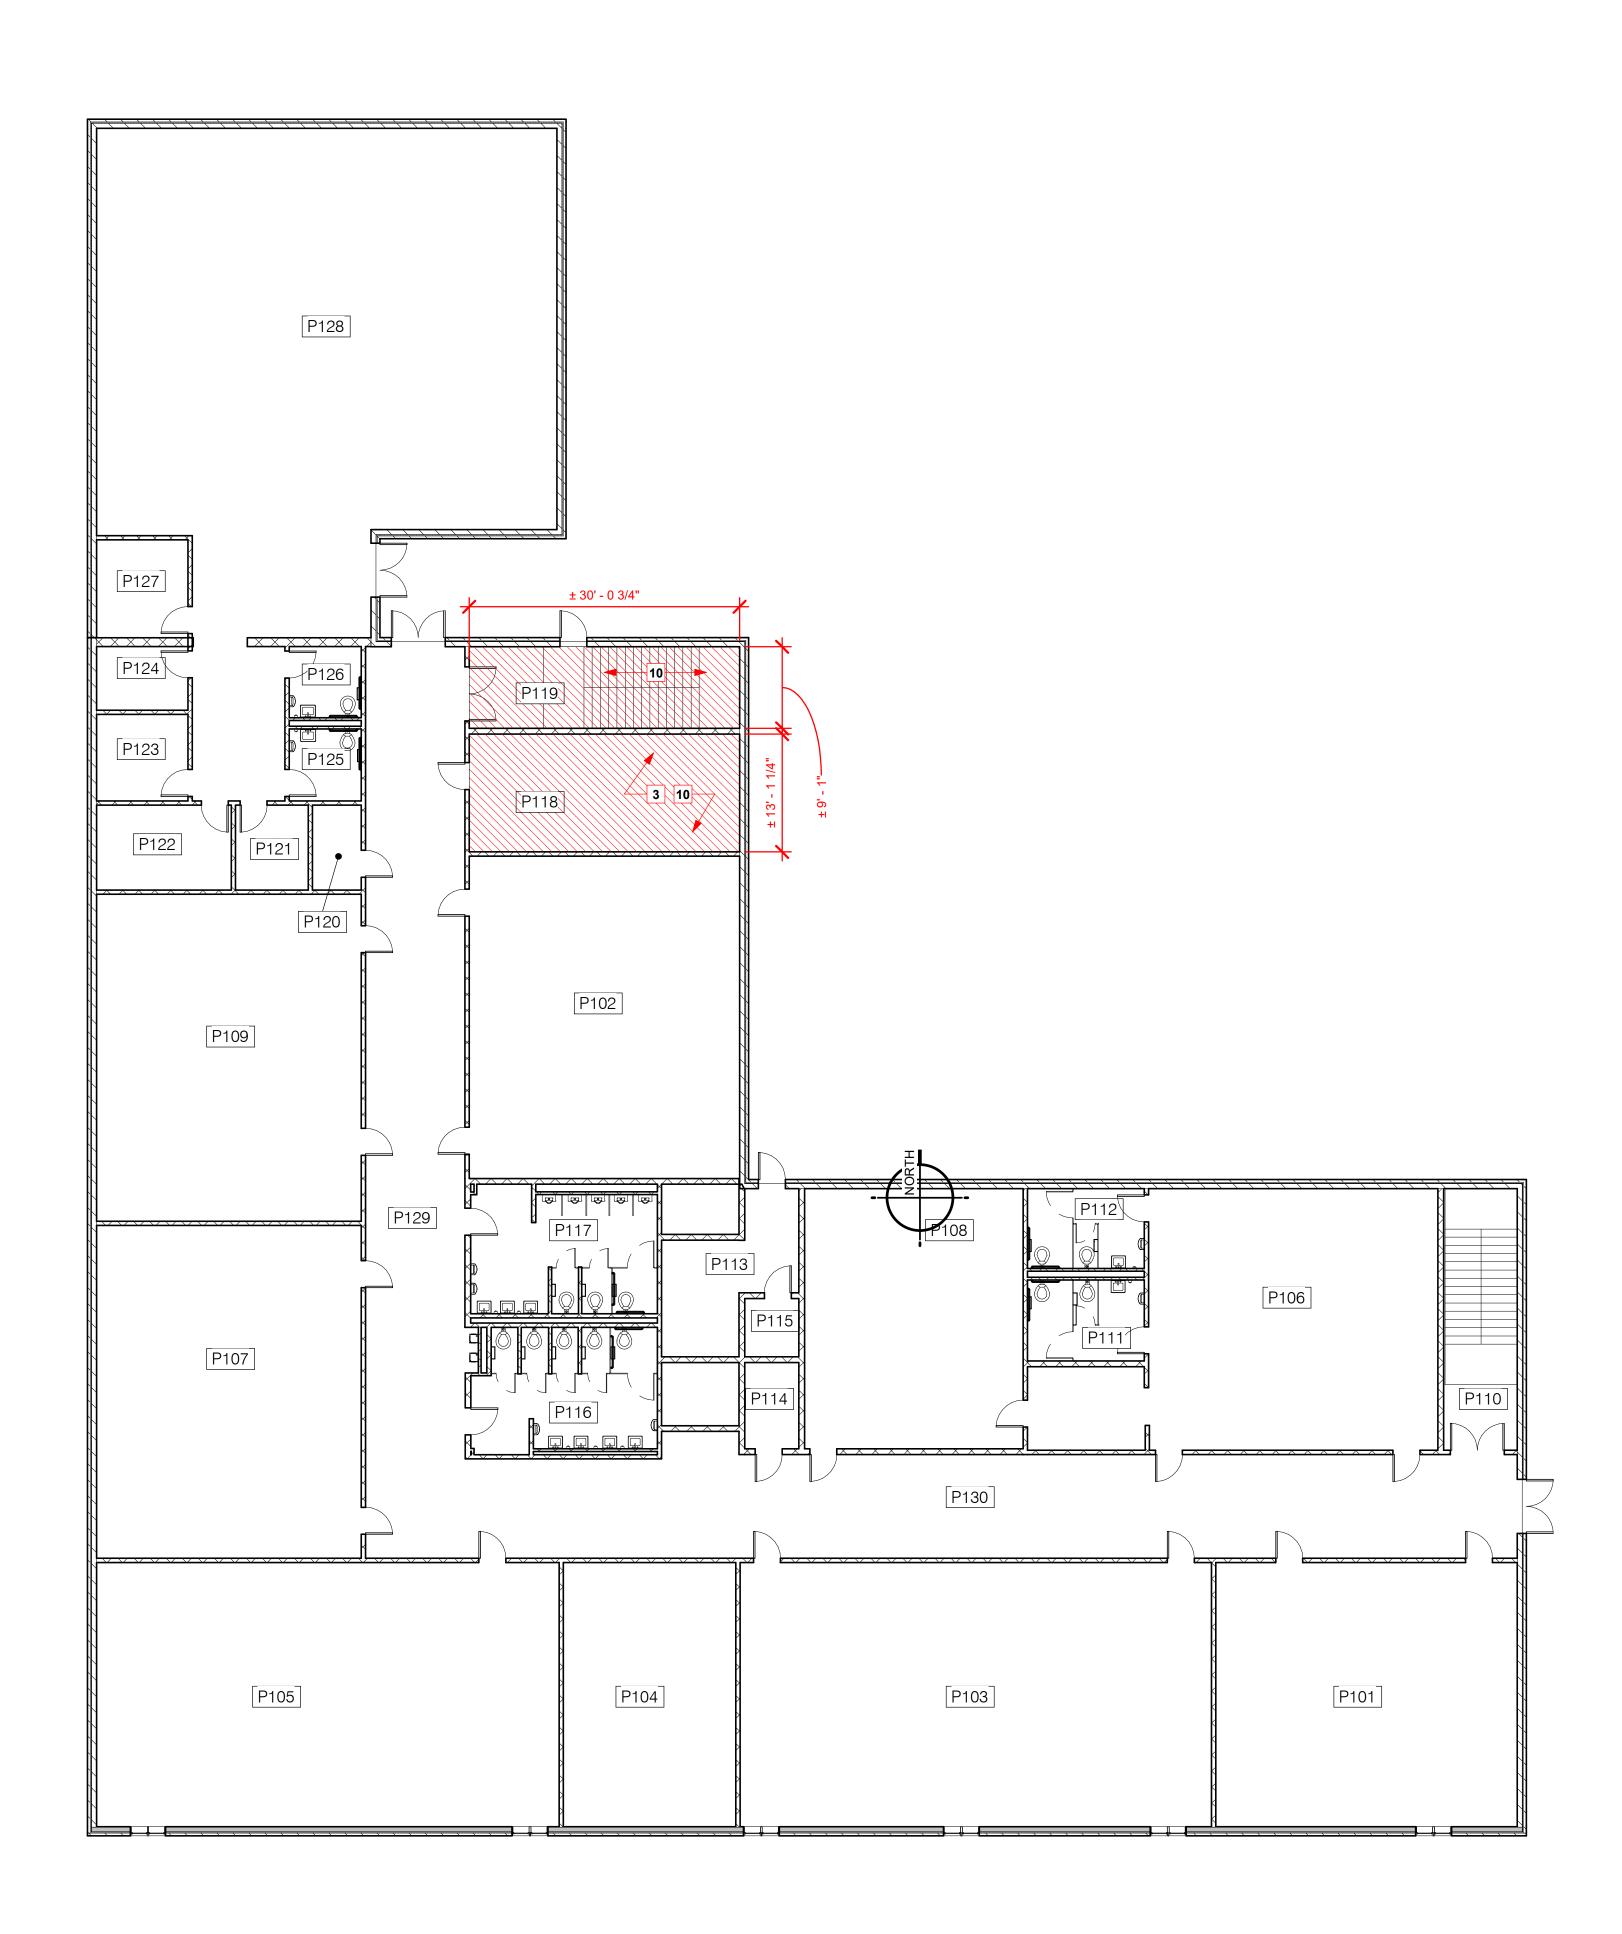

23 42 N

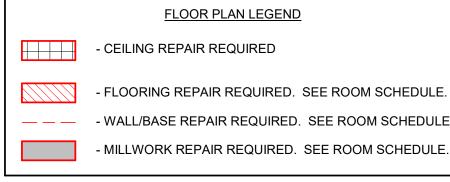









KEYNOTES

- SUSPENDED ACOUSTIC CEILING REPLACEMENT: REMOVE AND REPLACE DAMAGED CEILING GRID AND CEILING TILE AS SPECIFIED.
- CEILING GRID: REMOVE AND REPLACE DAMAGED CEILING GRID. MATCH
- EXISTING. SEE UNIT PRICE NO. 5
- VCT FLOORING REPAIRS: REMOVE AND REPLACE VCT FLOORING AS SPECIFIED IN AREAS WHERE INDICATED. SEE UNIT PRICE NO. 3. WINDOW REPAIRS: REPLACE BROKEN WINDOW PANES, BLOCKS, AND GASKETS
- TO MATCH EXISTING. ALL SEALANTS SHALL BE REMOVED AND REPLACED AS SPECIFIED TO ENSURE WEATHER TIGHT SEAL. SEE ELEVATIONS. STRUCTURAL CLAY BLOCK: GLAZED STRUCTURAL CLAY BLOCK TO BE 5.
- REMOVED AND REPLACED AS SPECIFIED TO MATCH EXISTING. CLEAN ALL CHALKING RESIDUE FROM EFFERVESCENCE.
- VINYL BASE REPLACEMENT: REPLACE DAMAGED OR MISSING BASE AS 6. SPECIFIED TO MATCH EXISTING. SEE UNIT PRICE NO. 4
- CARPET REPAIRS: DAMAGED CARPET HAS BEEN REMOVED. CLEAN FLOOR AND INSTALL NEW CARPET TILE AS SPECIFIED.
- PAINTING: WALL SURFACE IS TO BE SANDED, PREPARED, AND REPAINT TO 8. MATCH EXISTING CORNER TO CORNER. WATER STAINED WALL FROM ROOF 1088 PAINTED CEILING STRUCTURE: CEILING INCLUDING METAL TRUSSES ARE TO 9.
- BE CLEANED, PREPPED, AND REPAINTED END TO END TO MATCH EXISTING COLOR. VCT FLOORING CLEANING: CLEAN WATER STAINS FROM VCT FLOORING TO 10.
- REMOVE ANY DISCOLORATION WHERE INDICATED. MOP AND WAX ALL VCT FLOORING AT THE END OF CONSTRUCTION. **SKYLIGHT REPAIRS:** REMOVE AND REPLACE SKYLIGHT TO MATCH EXISTING. 11.
- 12. TERRAZZO FLOORING CLEANING: CLEAN AND POLISH EXISTING TERRAZZO FLOORING. REFER TO ROOM SCHEDULE FOR CLARITY. **CEILING TILE REPLACEMENT:** REMOVE AND REPLACE DAMAGED OR MISSING 13.
- ACOUSTIC CEILING TILE WITH NEW CEILING TILE AS SPECIFIED IN AREAS INDICATED. MATCH EXISTING TYPE AND SIZE. SEE UNIT PRICE NO. 1. INSTALL R-30 BATT INSULATION OVER TILE. SEE UNIT PRICE NO. 2 14. NOT USED.
- EXTERIOR WINDOWS AND DOORS: CAULK AND RESEAL PERIMETER OF 15. EXISTING WINDOWS AND DOORS.
- CMU REPAIR: RE-POINT DAMAGED CMU JOINTS AS SHOWN. PAINT WALL FROM 16. END TO END IN COLOR TO MATCH EXISTING AS SPECIFIED. SEE PHOTOS.
- BRICK REPAIR: CAULK CRACKED AREAS AND REPAINT. 17. LOCKERS: REPLACE DAMAGED UNITS AS SHOWN. MATCH EXISTING STYLE, 18. SIZE AND COLORS.
- BRICK WALLS: CLEAN ALL WATER STAINS FROM ENTIRE BRICK WALL. SHELVING REPLACEMENT: REMOVE AND REPLACE DAMAGED SHELVING UNITS 20. WITH <u>GLASS DOORS</u>. MATCH EXISTING MATERIALS, FINISHES AND CONSTRUCTION STYLE.
- BASE CABINET: REMOVE AND REPLACE DAMAGED BASE CABINET. MATCH 21. EXISTING STYLE, SIZE, AND CONSTRUCTION. SALVAGE AND REINSTALL COUNTERTOP
- SECTIONAL DOOR: REMOVE AND REPLACE OVERHEAD SECETIONAL DOOR AS 22. SPECIFIED. CONTRACTOR TO PROVIDE ANY ADDITIONAL SUPPORT REQUIRED BY THE MANUFACTURER. GYPSUM BOARD: REMOVE AND REPLACE DAMAGED GYPSUM BOARD TO
- 23. NEAREST FRAMING MEMBER. FINISH AND RE-PAINT WALL CORNER TO CORNER.
- PREFINISHED GYPSUM BOARD WITH VINYL WALL COVER AND CORNER TRIM: 24. REMOVE AND REPLACE DAMAGED VINYL COVERED GYPSUM BOARD FROM FLOOR TO CEILING WHERE INDICATED ON FLOOR PLAN. STOREFRONT WINDOW: REMOVE AND REPLACE STOREFRONT WINDOW AS 25.
- SPECIFIED.
- NOT USED. 26. GYPSUM CEILING REPAIRS: REMOVE AND REPLACE DAMAGED GYPSUM 27. CEILING BOARD TO NEAREST FRAMING MEMBER WHERE INDICATED, FINISH TO MATCH EXISTING AS SPECIFIED.
- METAL ROOF PANEL REPAIRS: REMOVE AND REPLACE DEFORMED OR MISSING 28. METAL ROOF PANELS TO MATCH EXISTING. CONCRETE FLOOR CLEANING: CLEAN AND RESEAL FLOOR AS SPECIFIED. 29.
- BASE CABINET: REMOVE AND REPLACE DAMAGED BASE CABINET. MATCH EXISTING STYLE, SIZE, AND CONSTRUCTION. SALVAGE AND REINSTALL COUNTERTOP. PROTECT ALL MECHANICAL CONNECTIONS. TILE CLEANING: CLEAN STAINS FROM WALL TILE TO REMOVE ANY 31.
- DISCOLORATION WHERE INDICATED. CLEAN/REPAINT MASONRY WALL: MECHANICALLY REMOVE ALL LOOSE OR 32. PEELING PAINT AND ALL CHALKING RESIDUE FROM EFFERVESCENCE FROM CORNER TO CORNER. PERFORM REQUIRED MOISTURE TESTING PRIOR TO REPAINTING WALL AS SPECIFIED.
- 33. PLASTER CEILING REPAIRS: REMOVED AND REPLACE DAMAGED PLASTER CEILING WHERE INDICATED AS SPECIFIED, PAINT IN COLOR TO MATCH EXISTING.
- MEP DAMAGES: SEE MECHANICAL, PLUMBING AND ELECTRICAL PLANS. FURNITURE SETTING AND RESETING: RELOCATE ALL EXISTING FURNITURE TO 35. TEMPORARY ROOM IN MODULAR BUILDINGS WHILE EXISTING SPACE IS BEING REPAIRED. REINSTALL AND RESET FURNITURE ONCE REPAIRS ARE COMPLETE. SEE PHASING PLAN.
- **36. SUSPENDED CEILING INSULATION:** INSTALL R-19 BATT INSULATION AS SPECIFIED ABOVE PREVIOUSLY INSTALLED SUSPENDED CEILING TILE. SEE UNIT PRICE NO. 2.
- BRICK WALL REPLACEMENT: REMOVE AND REPLACE BRICK WALL AS 37. INDICATED. DISPOSE OF OLD BRICK, MATCH NEW BRICK AND MORTAR TO EXISTING AS APPROVED BY ARCHITECT, SEE STRUCTURAL. BUILDING TO REMAIN WEATHERPROOF AND CONDITIONED DURING REPAIRS. **38. DOOR REPAIR:** CLEAN, PREP AND RE-PAINT DOOR FRAME - SEE DOOR SCHEDULE.
- CORRIDOR WALL REPAIR: REMOVE DAMAGED STOREFRONT WINDOW AND 39. EXISTING 3/4" PLYWOOD SHEATHING BELOW WINDOW. INSTALL NEW WINDOW PER SCHEDULE AND NEW 3/4" PLYWOOD SHEATHING. PAINT AS SPECIFIED, IN COLOR AS SELECTED. SEE DETAILS.
- **GLAZING REPAIR:** REMOVE AND REPLACE BROKEN GLASS. MATCH EXISTING 40. TINT. PROVIDE SAFETY GLASS AS REQUIRED. DOOR REPAIR: REMOVE AND REPLACE EXISTING LEFT DOOR LEAF. PROVIDE 41.
- AN INSULATED HOLLOW METAL DOOR WITH VISION PANEL TO MATCH RIGHT DOOR LEAF. REINSTALL EXISTING DOOR HARDWARE. PAINT AS DIRECTED.



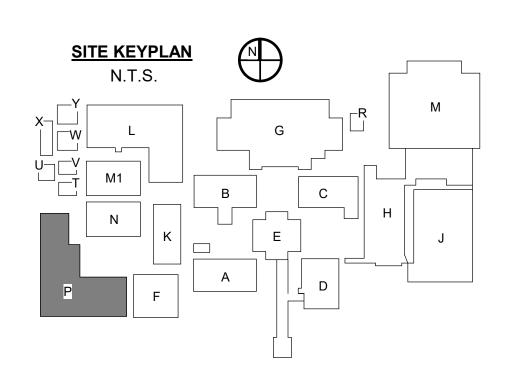

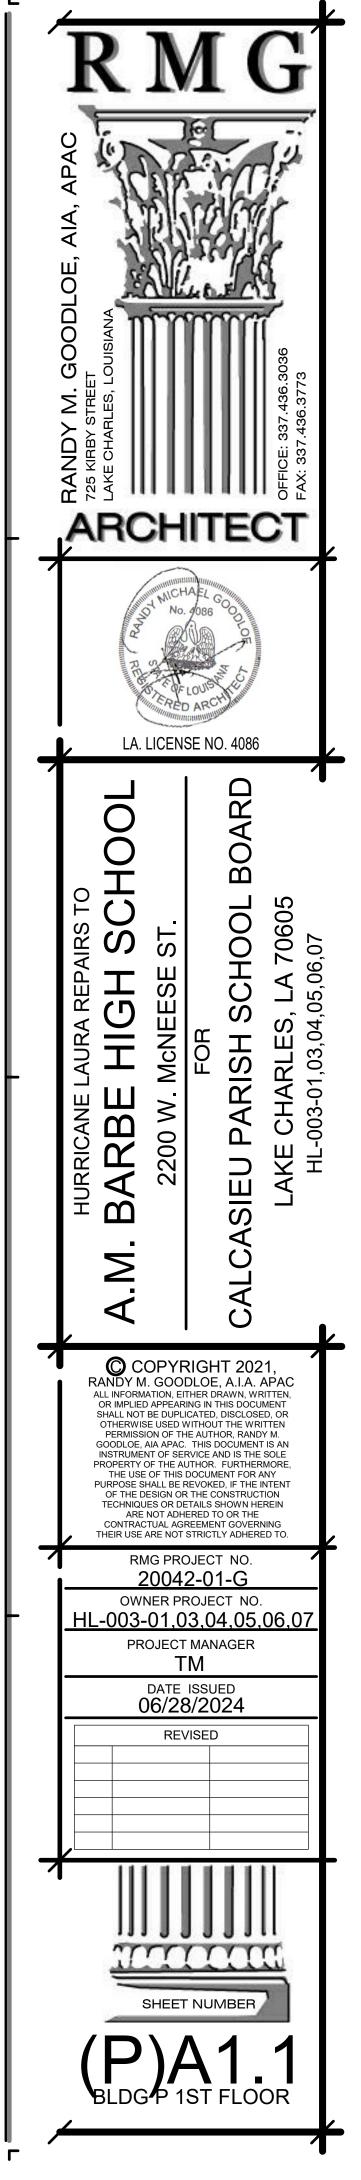

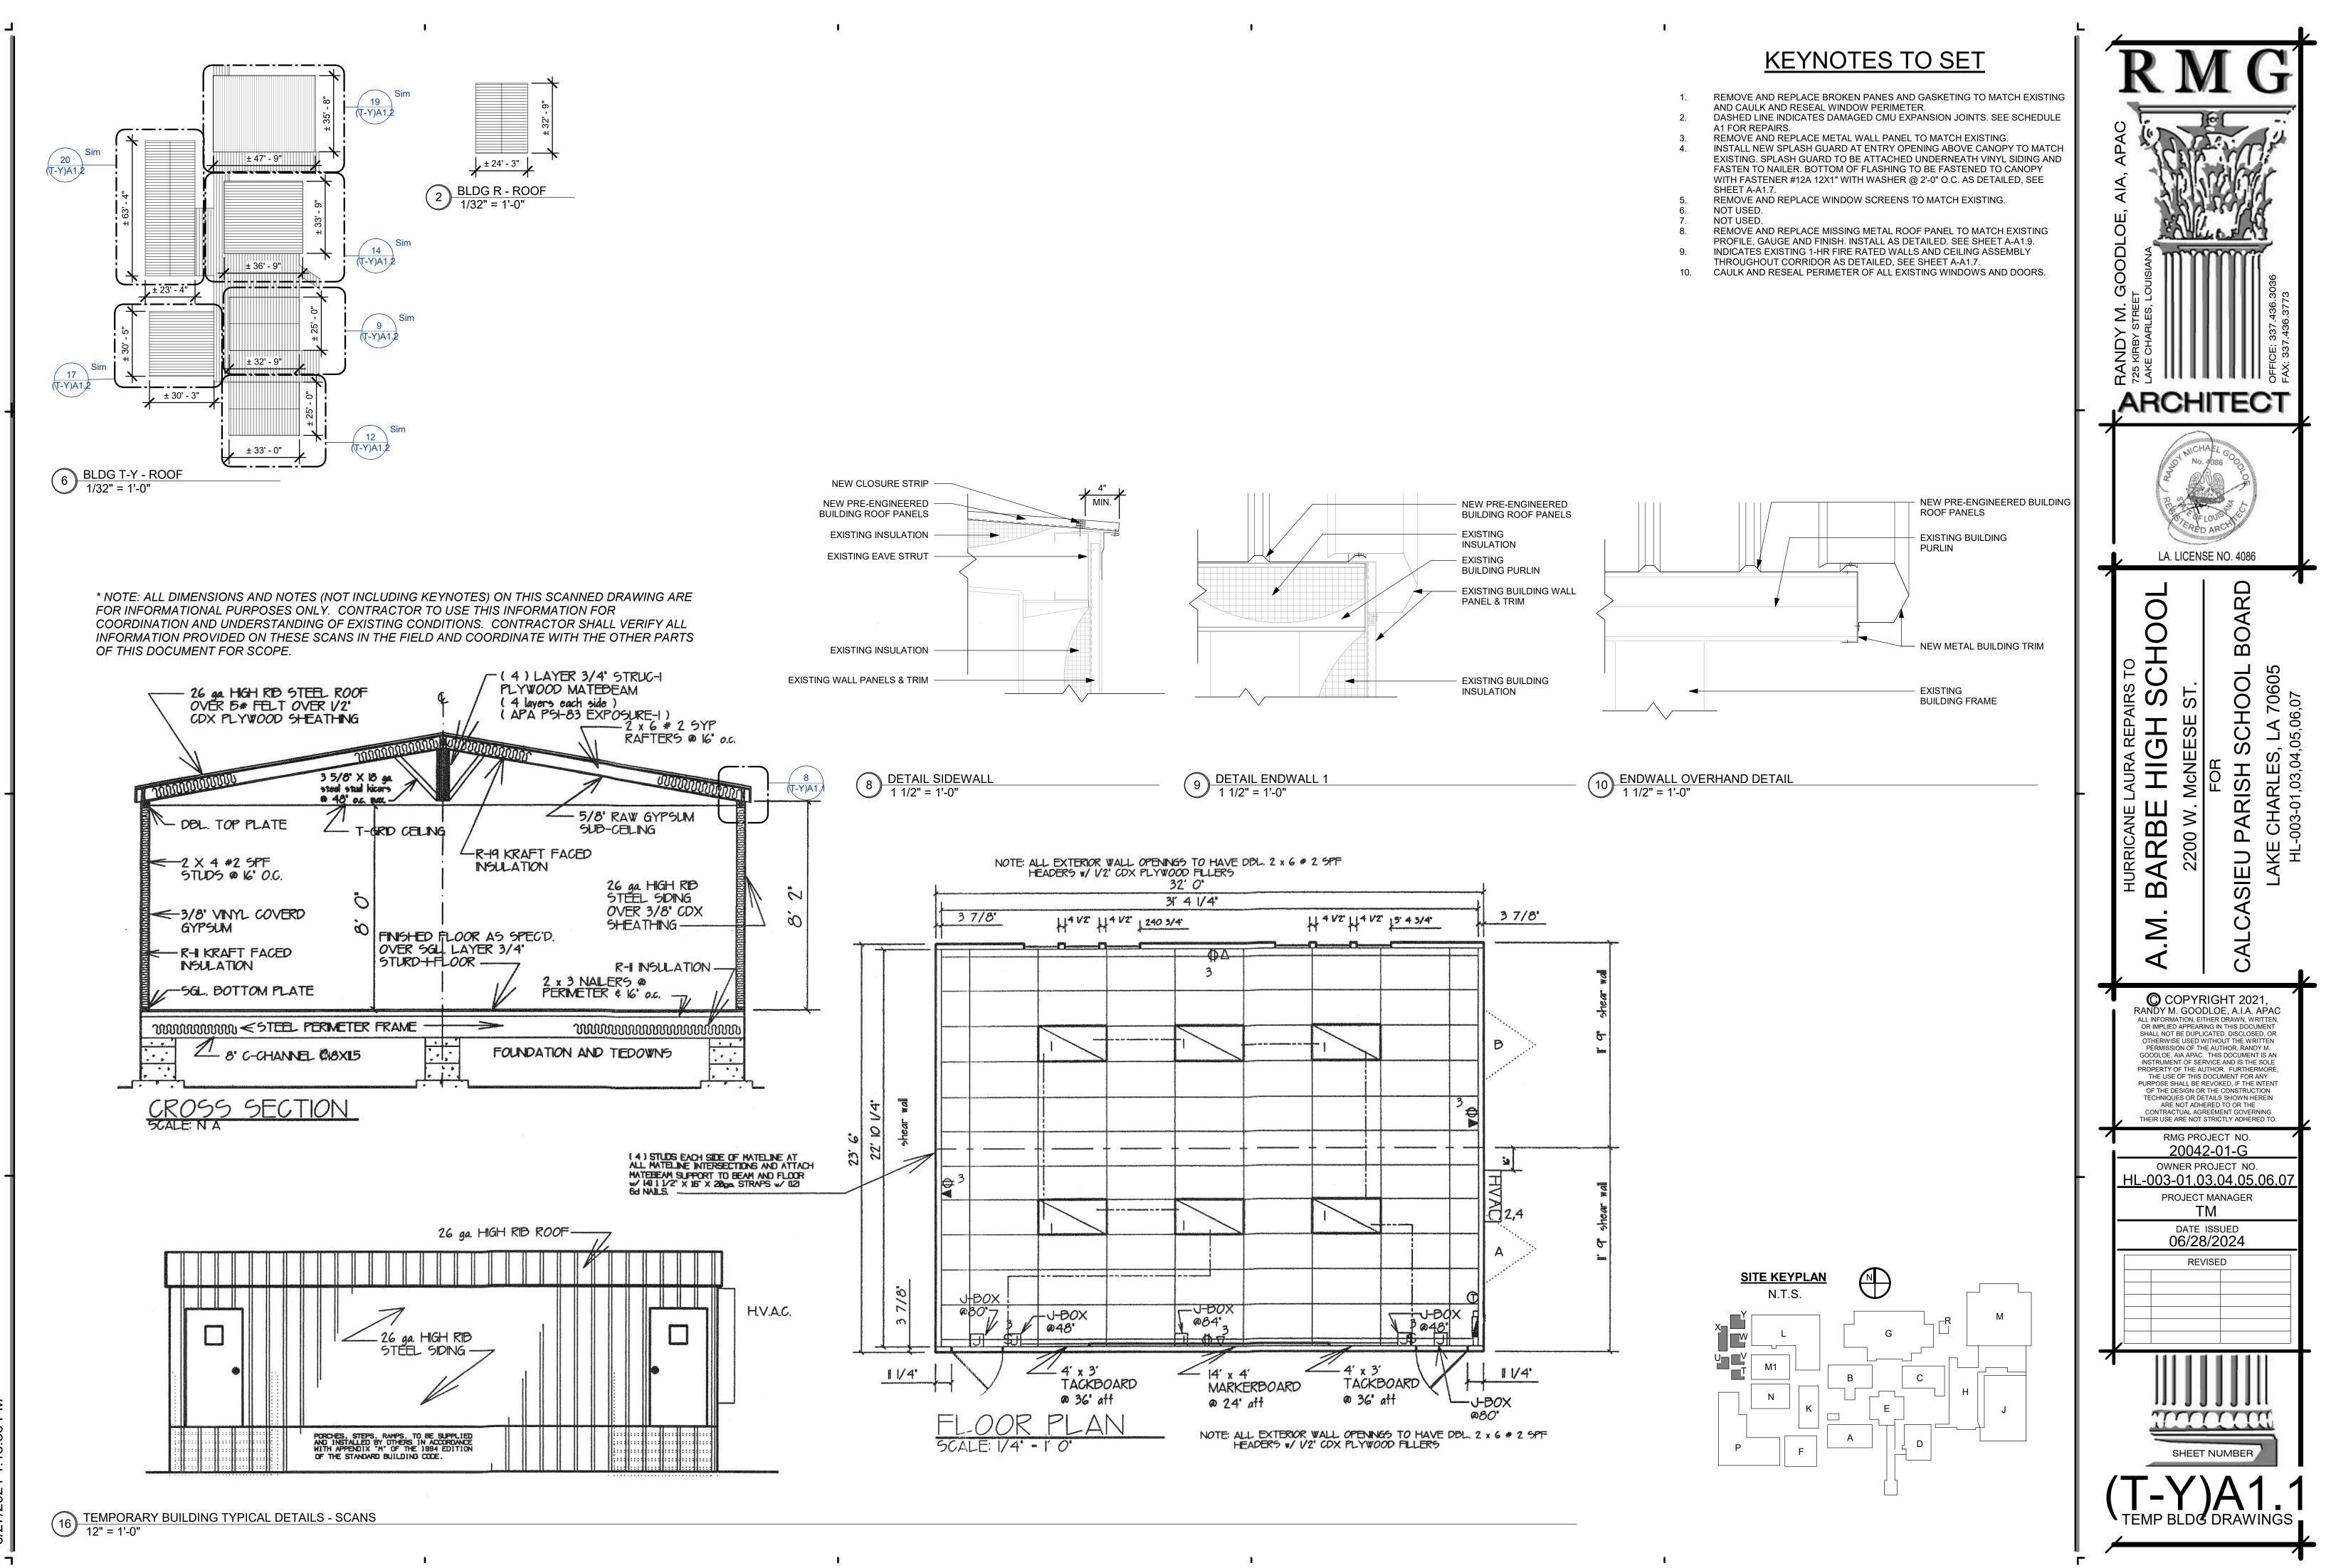

6/27/2024 1:15:36 PM

INTERIOR REPAIR LEGEND - BUILDING R-Y

		<u></u>			BOILDING		
ROOM NUMBER	Area (SF)	Perimeter (LF)	Floor	Wall	Ceiling	Other	Fire Safety
T101	768 SF	112 LF	-	-	-	-	-
U101	865.33 SF	117.67 LF	F2	W3	C1, C2, C3, C4	-	-
V101	764 SF	111.67 LF	-	-	-	-	-
W101	1176.53 SF	137.33 LF	-	-	-	-	-
X101	1227.41 SF	191.77 LF	-	-	C1	-	-
Y101	1279.96 SF	143.17 LF	-	W3	C1, C2, C3, C4	-	-

SCHEDULE FLOOR NOTES


F1 - CLEAN ENTIRE VCT FLOOR, BUFF AND WAX.


F2 - HATCHED AREA INDICATES VCT FLOORING TO BE REMOVED AND REPLACED TO MATCH EXISTING. SEE UNIT PRICE NO. 3 F3 - HATCHED AREA INDICATED REPLACE MISSING VCT TO MATCH EXISTING. SEE

- REPLACED TO MATCH EXISTING. SEE UNIT PRICE NO. 2
- REPLACED.
- CAULK.

SCHEDULE WALL NOTES

W1 - CLEAN ALL WALLS AND BASE. W2 - REMOVE INTERIOR WALL FINISH AND INSULATION FROM CORNER TO CORNER. REPLACE INSULATION, WALL FINISH AND PAINT TO MATCH EXISTING.

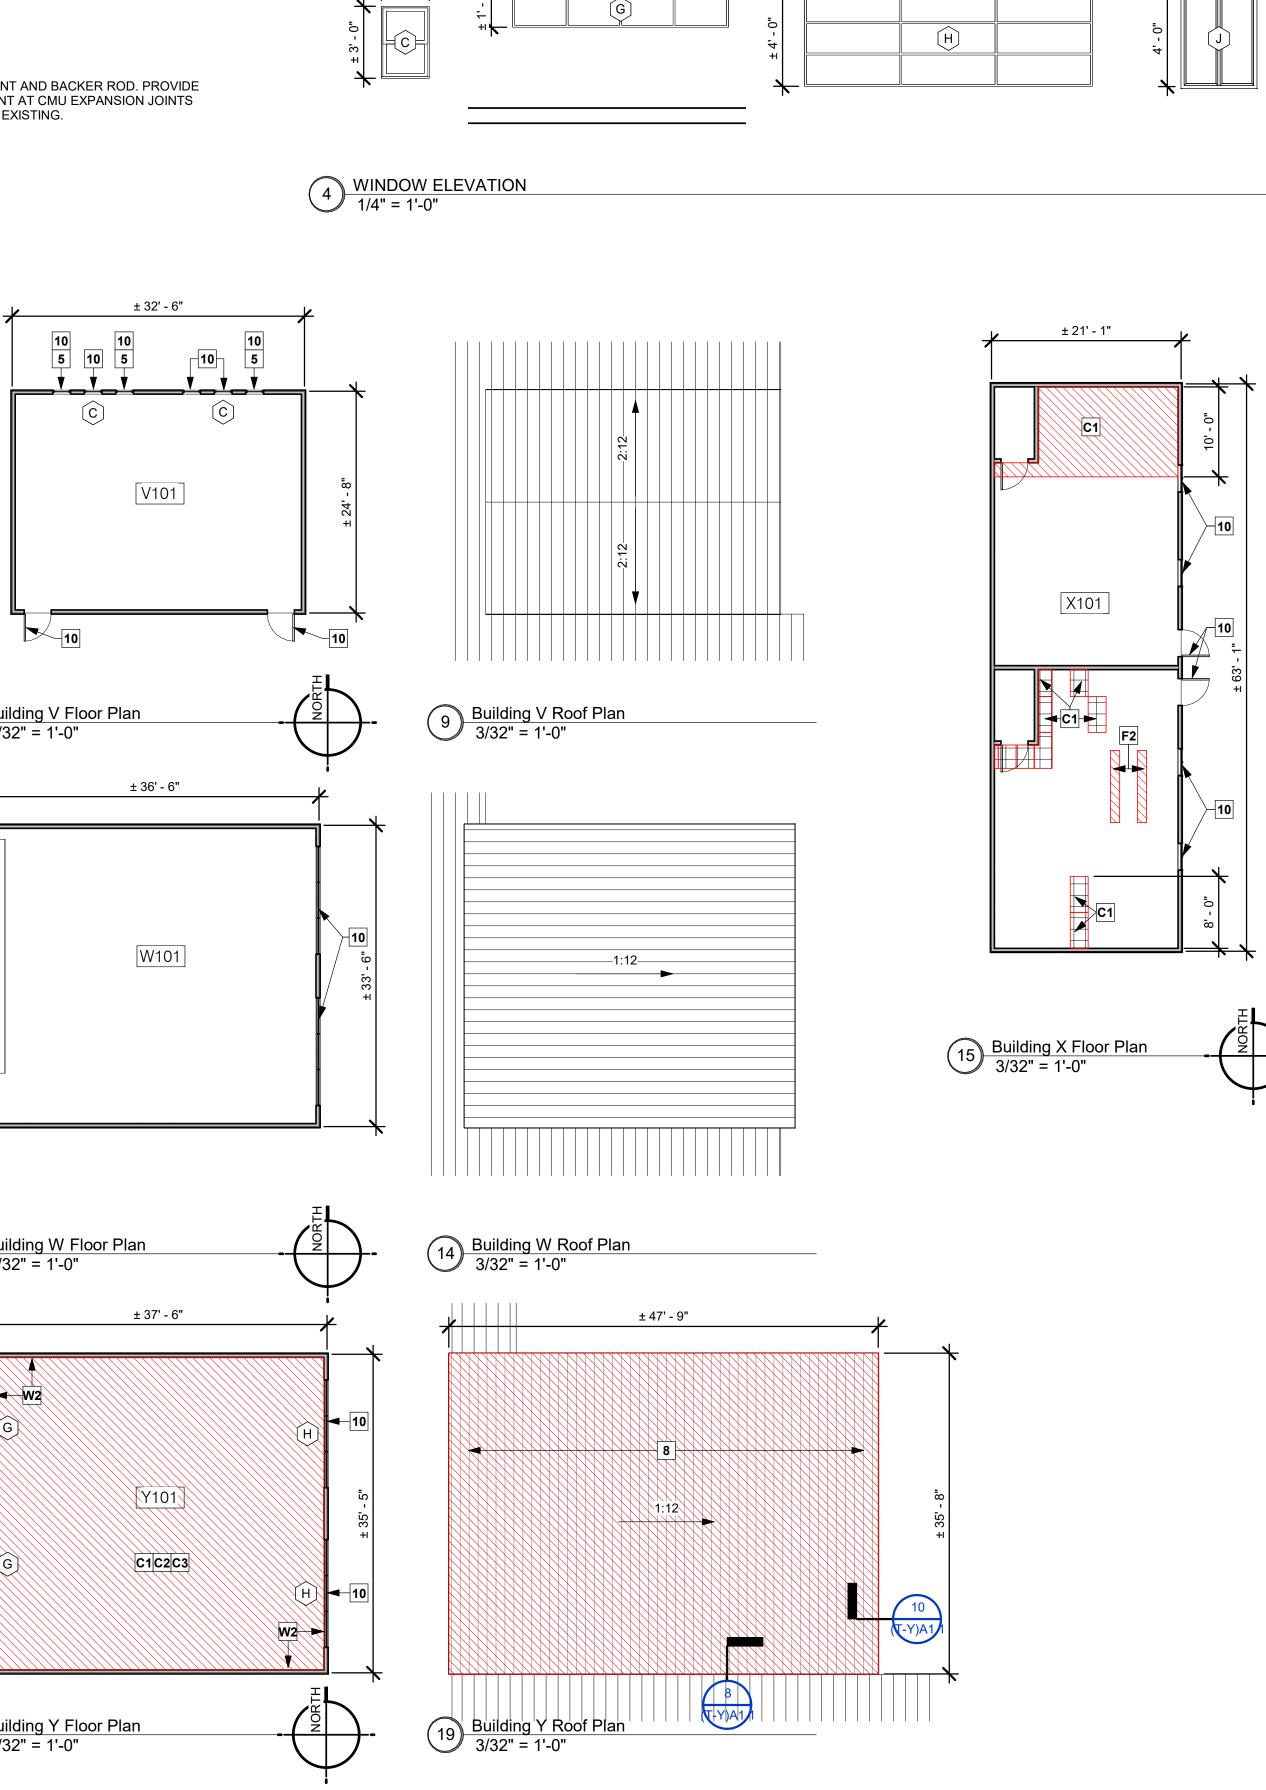

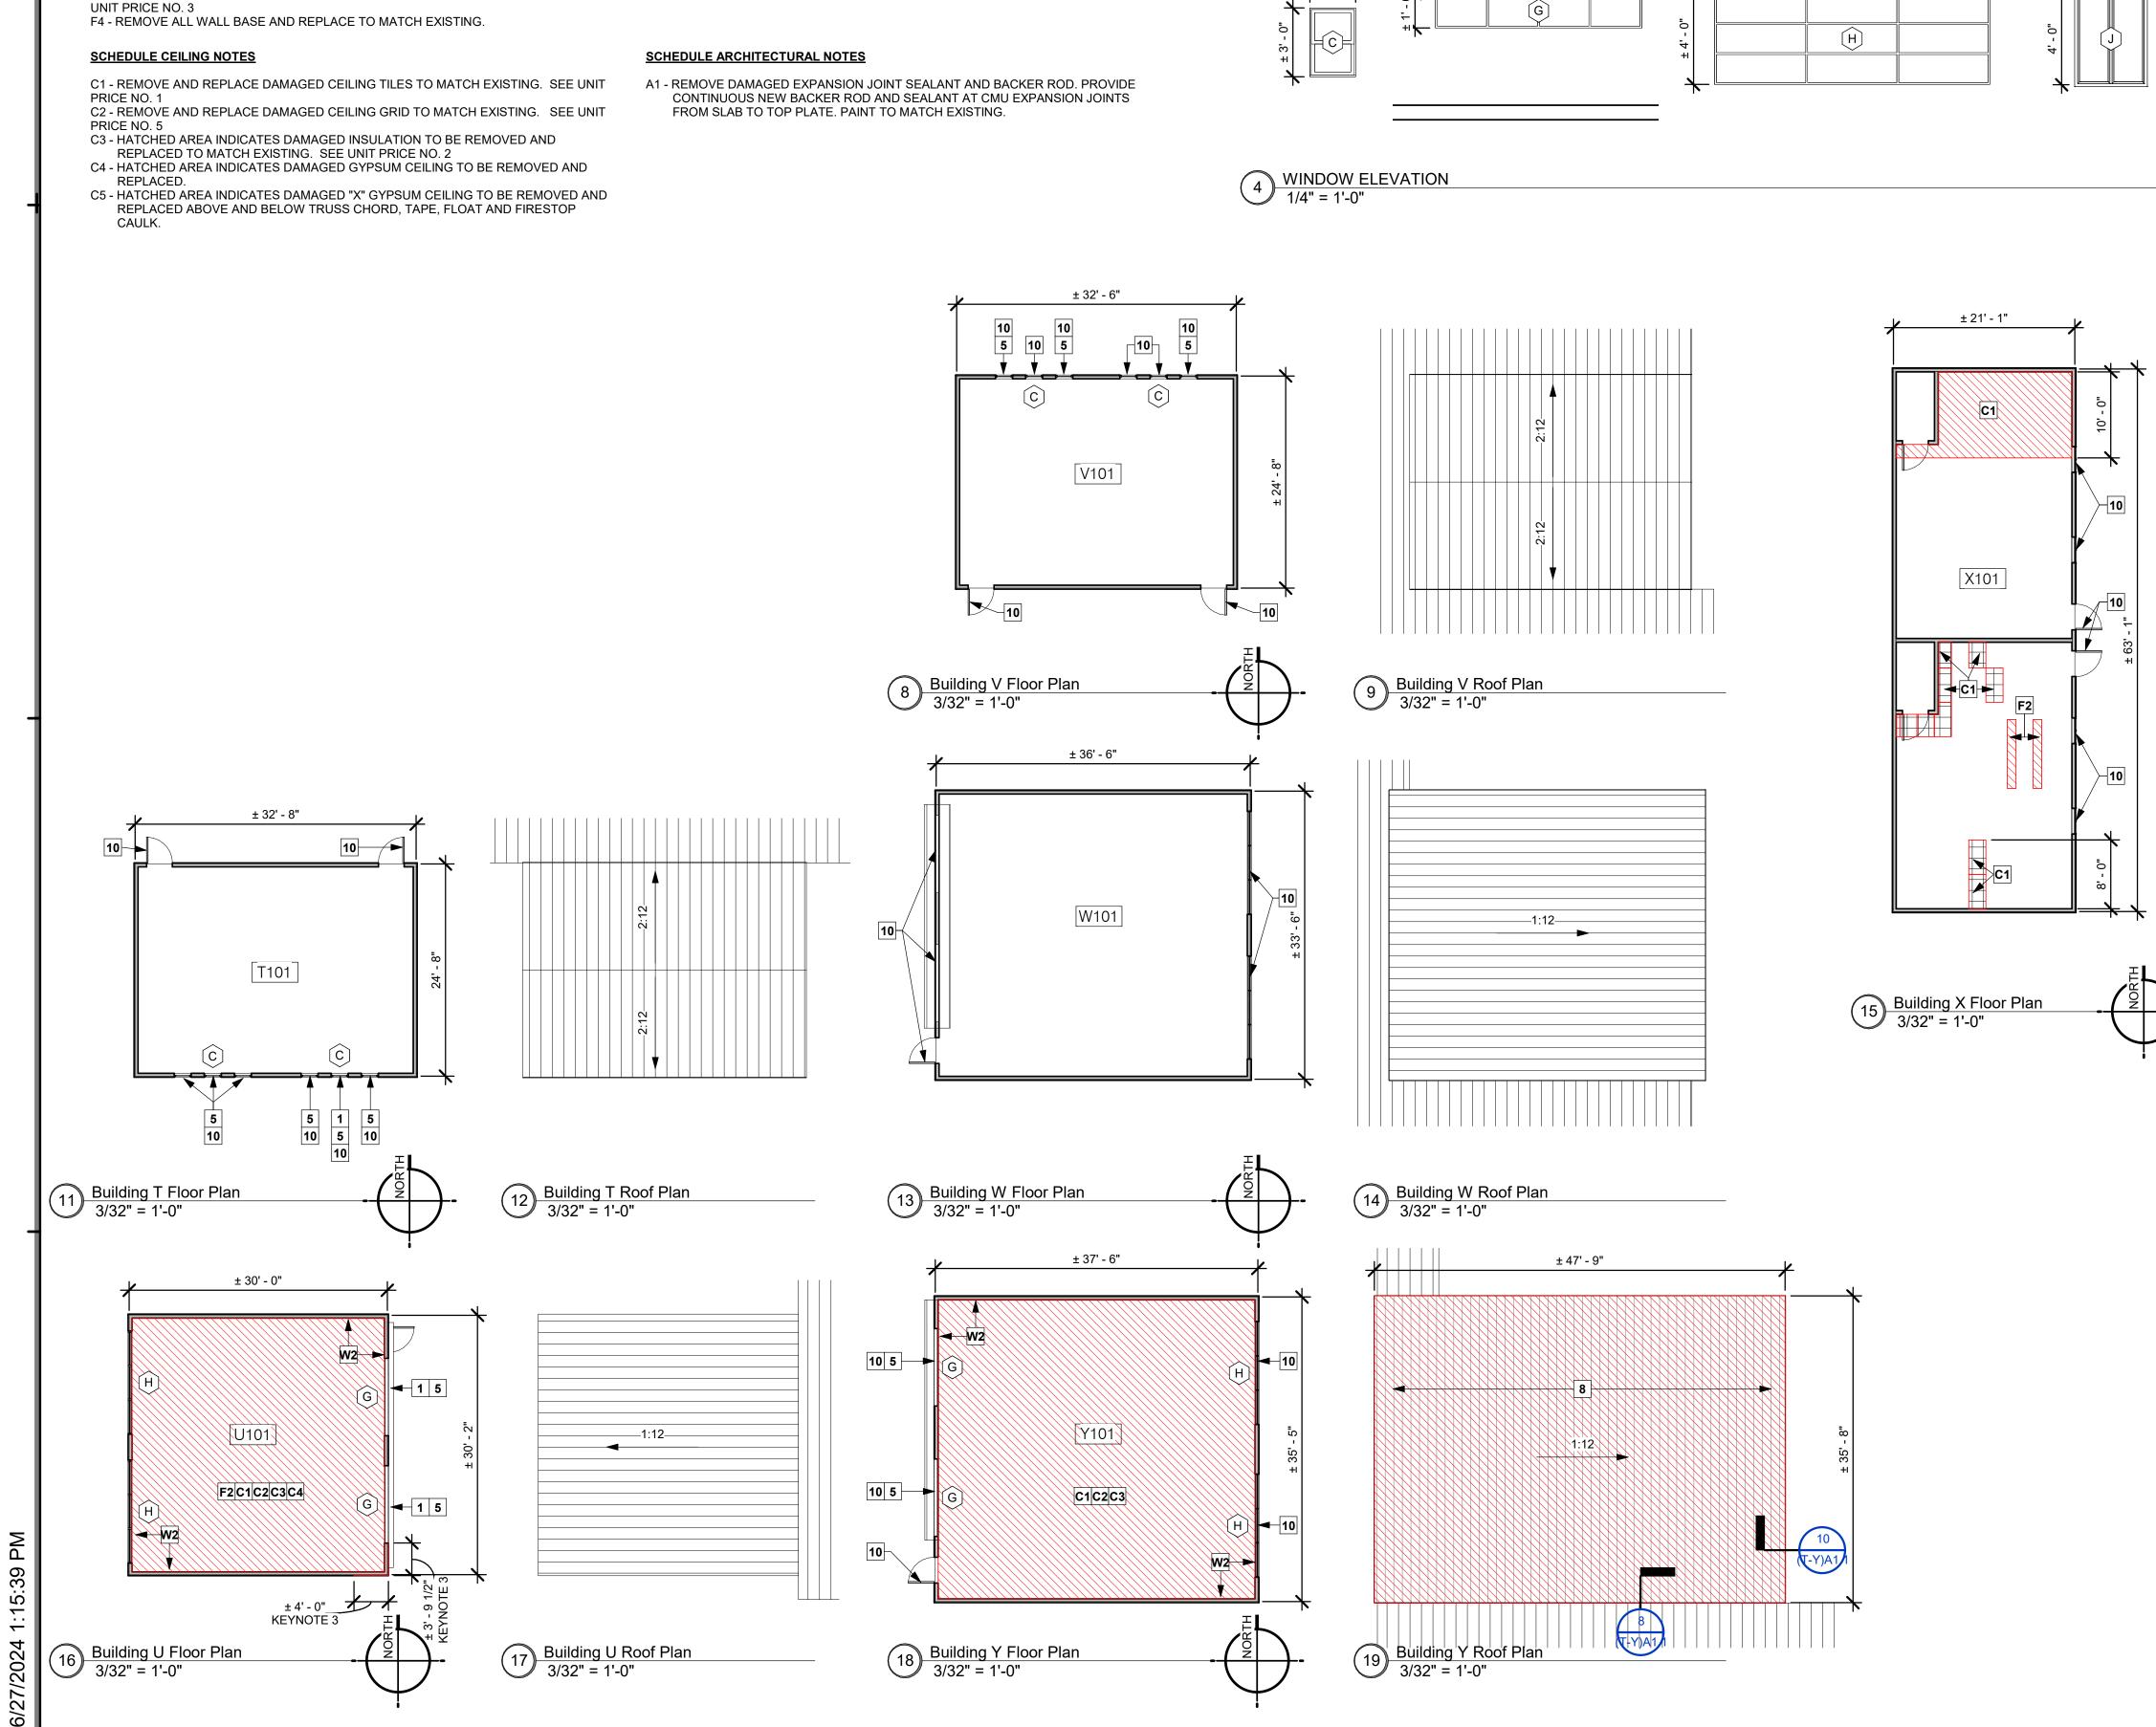


1

TEMPORARY BUILDING WINDOW SCHEDULE FRAME MARK SIZE **TYPE & MATERIAL** GLASS ALUMINUM SINGLE HUNG CLEAR, SINGLE PANE 36"X60' ALUMINUM MULTI -LITE SLIDING CLEAR, SINGLE PANE 18"x96" ALUMINUM PICTURE 48"x144" 48"X36" ALUMINUM SLIDING


± 9' - 0"


1


± 12' - 0"

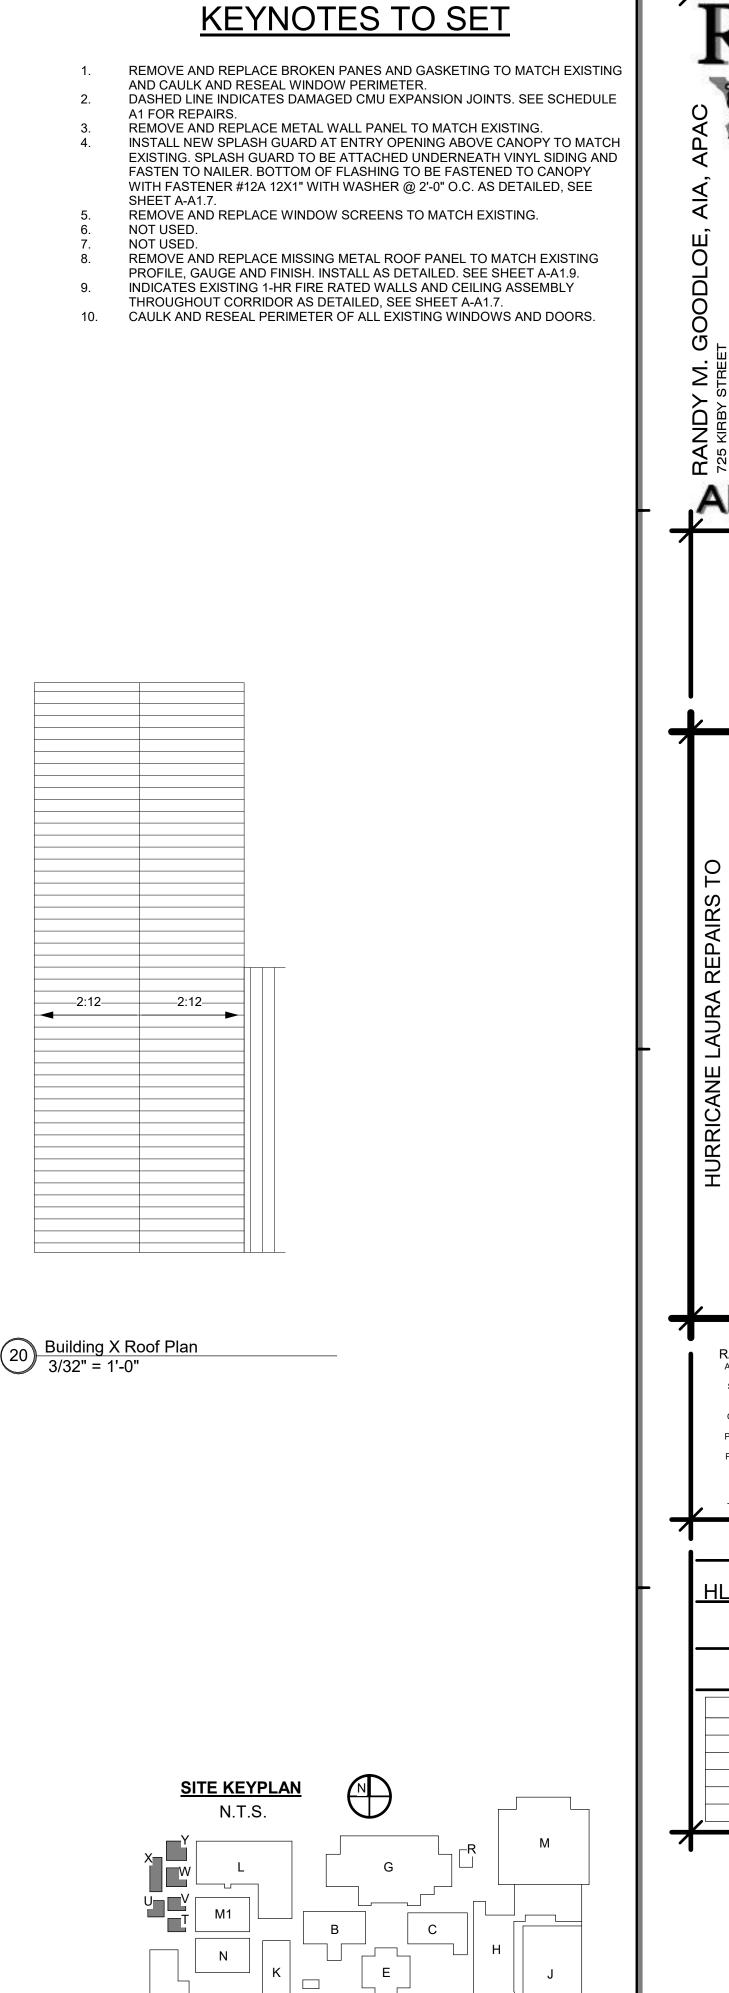

Α

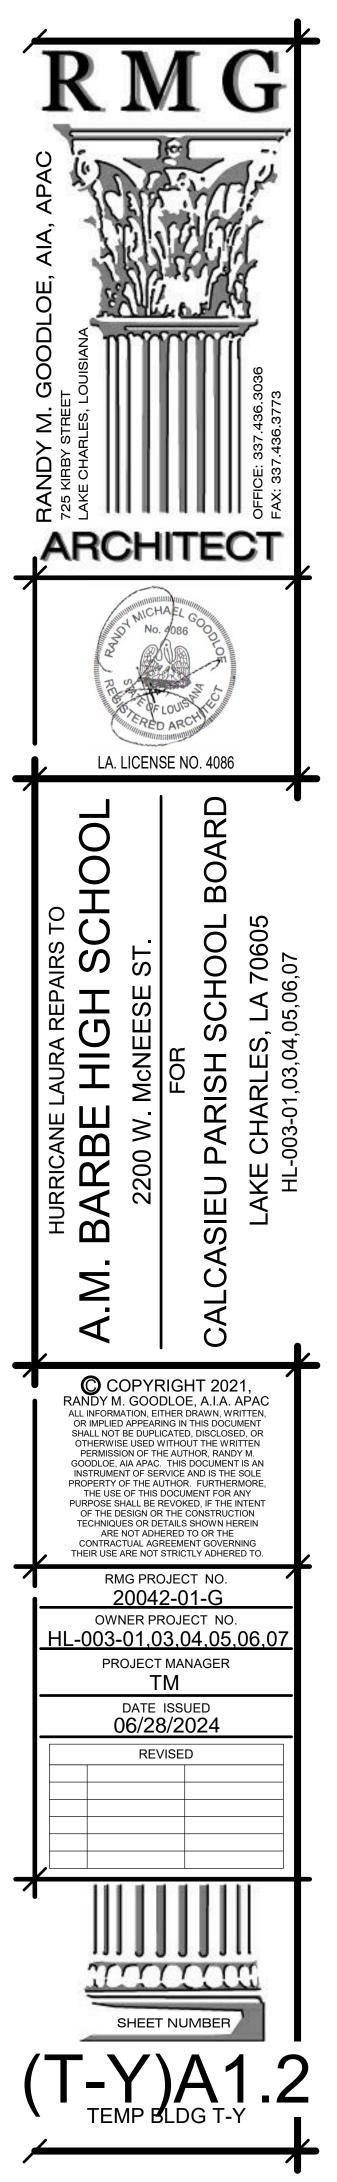

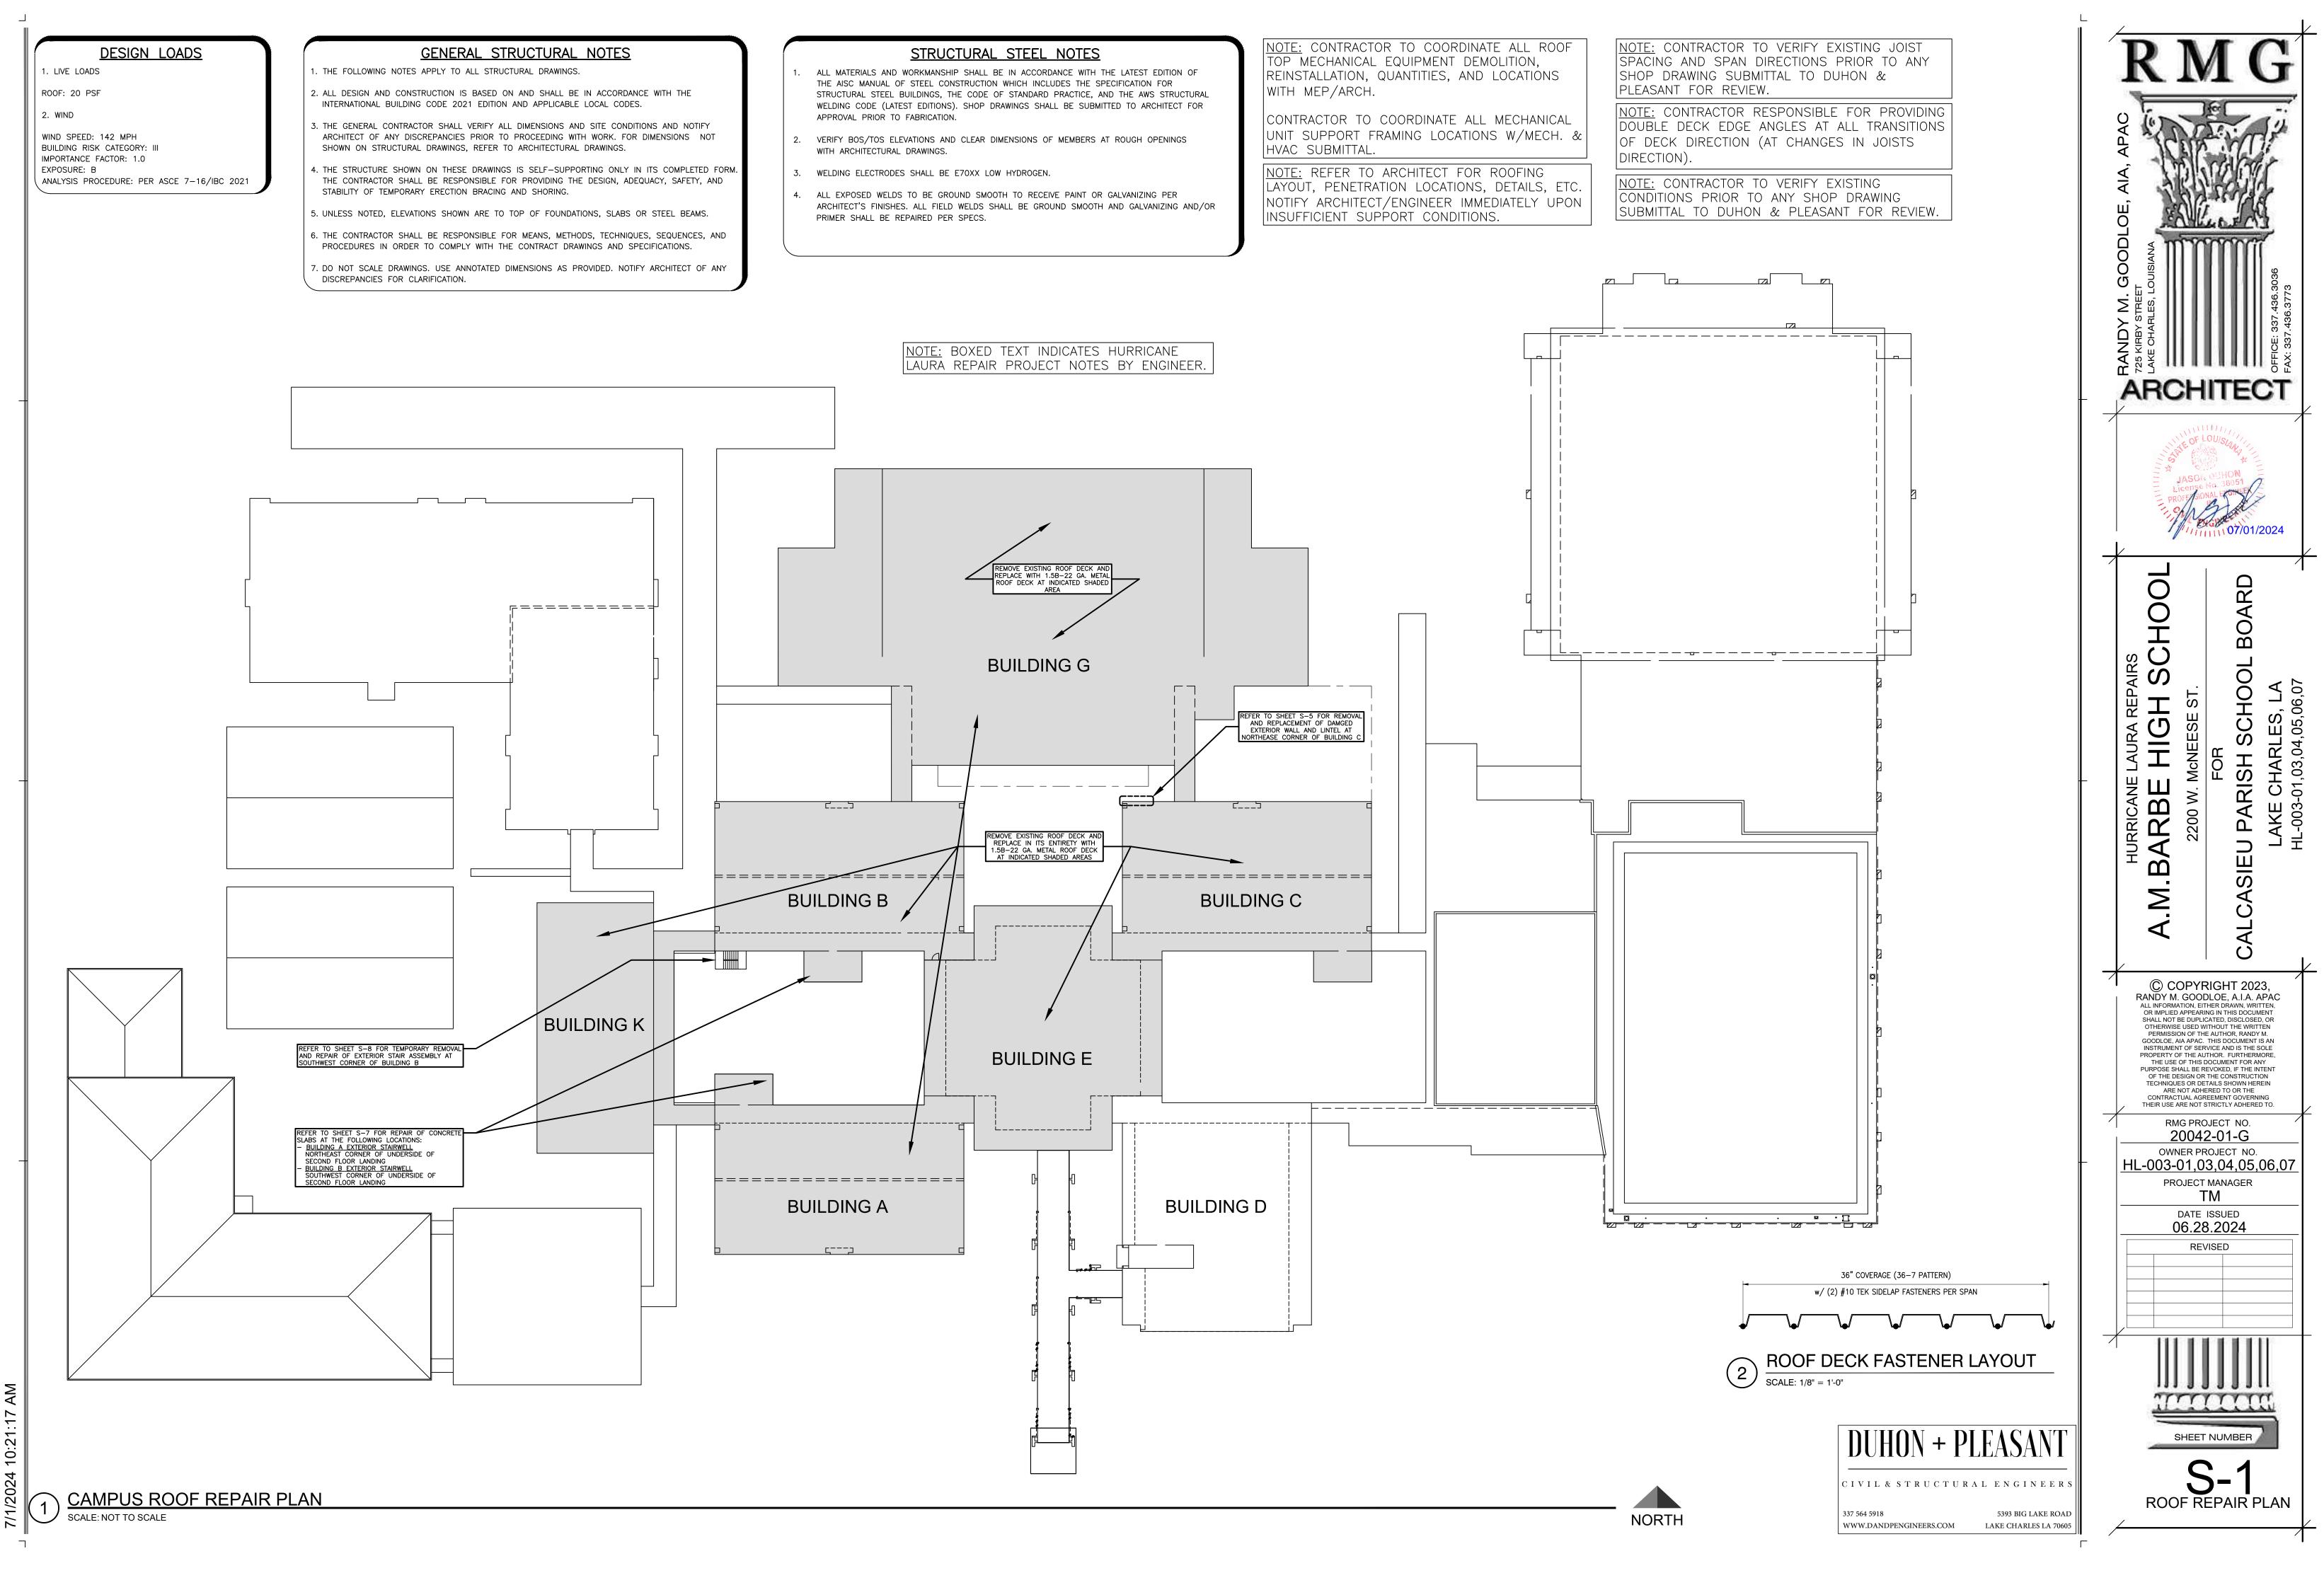

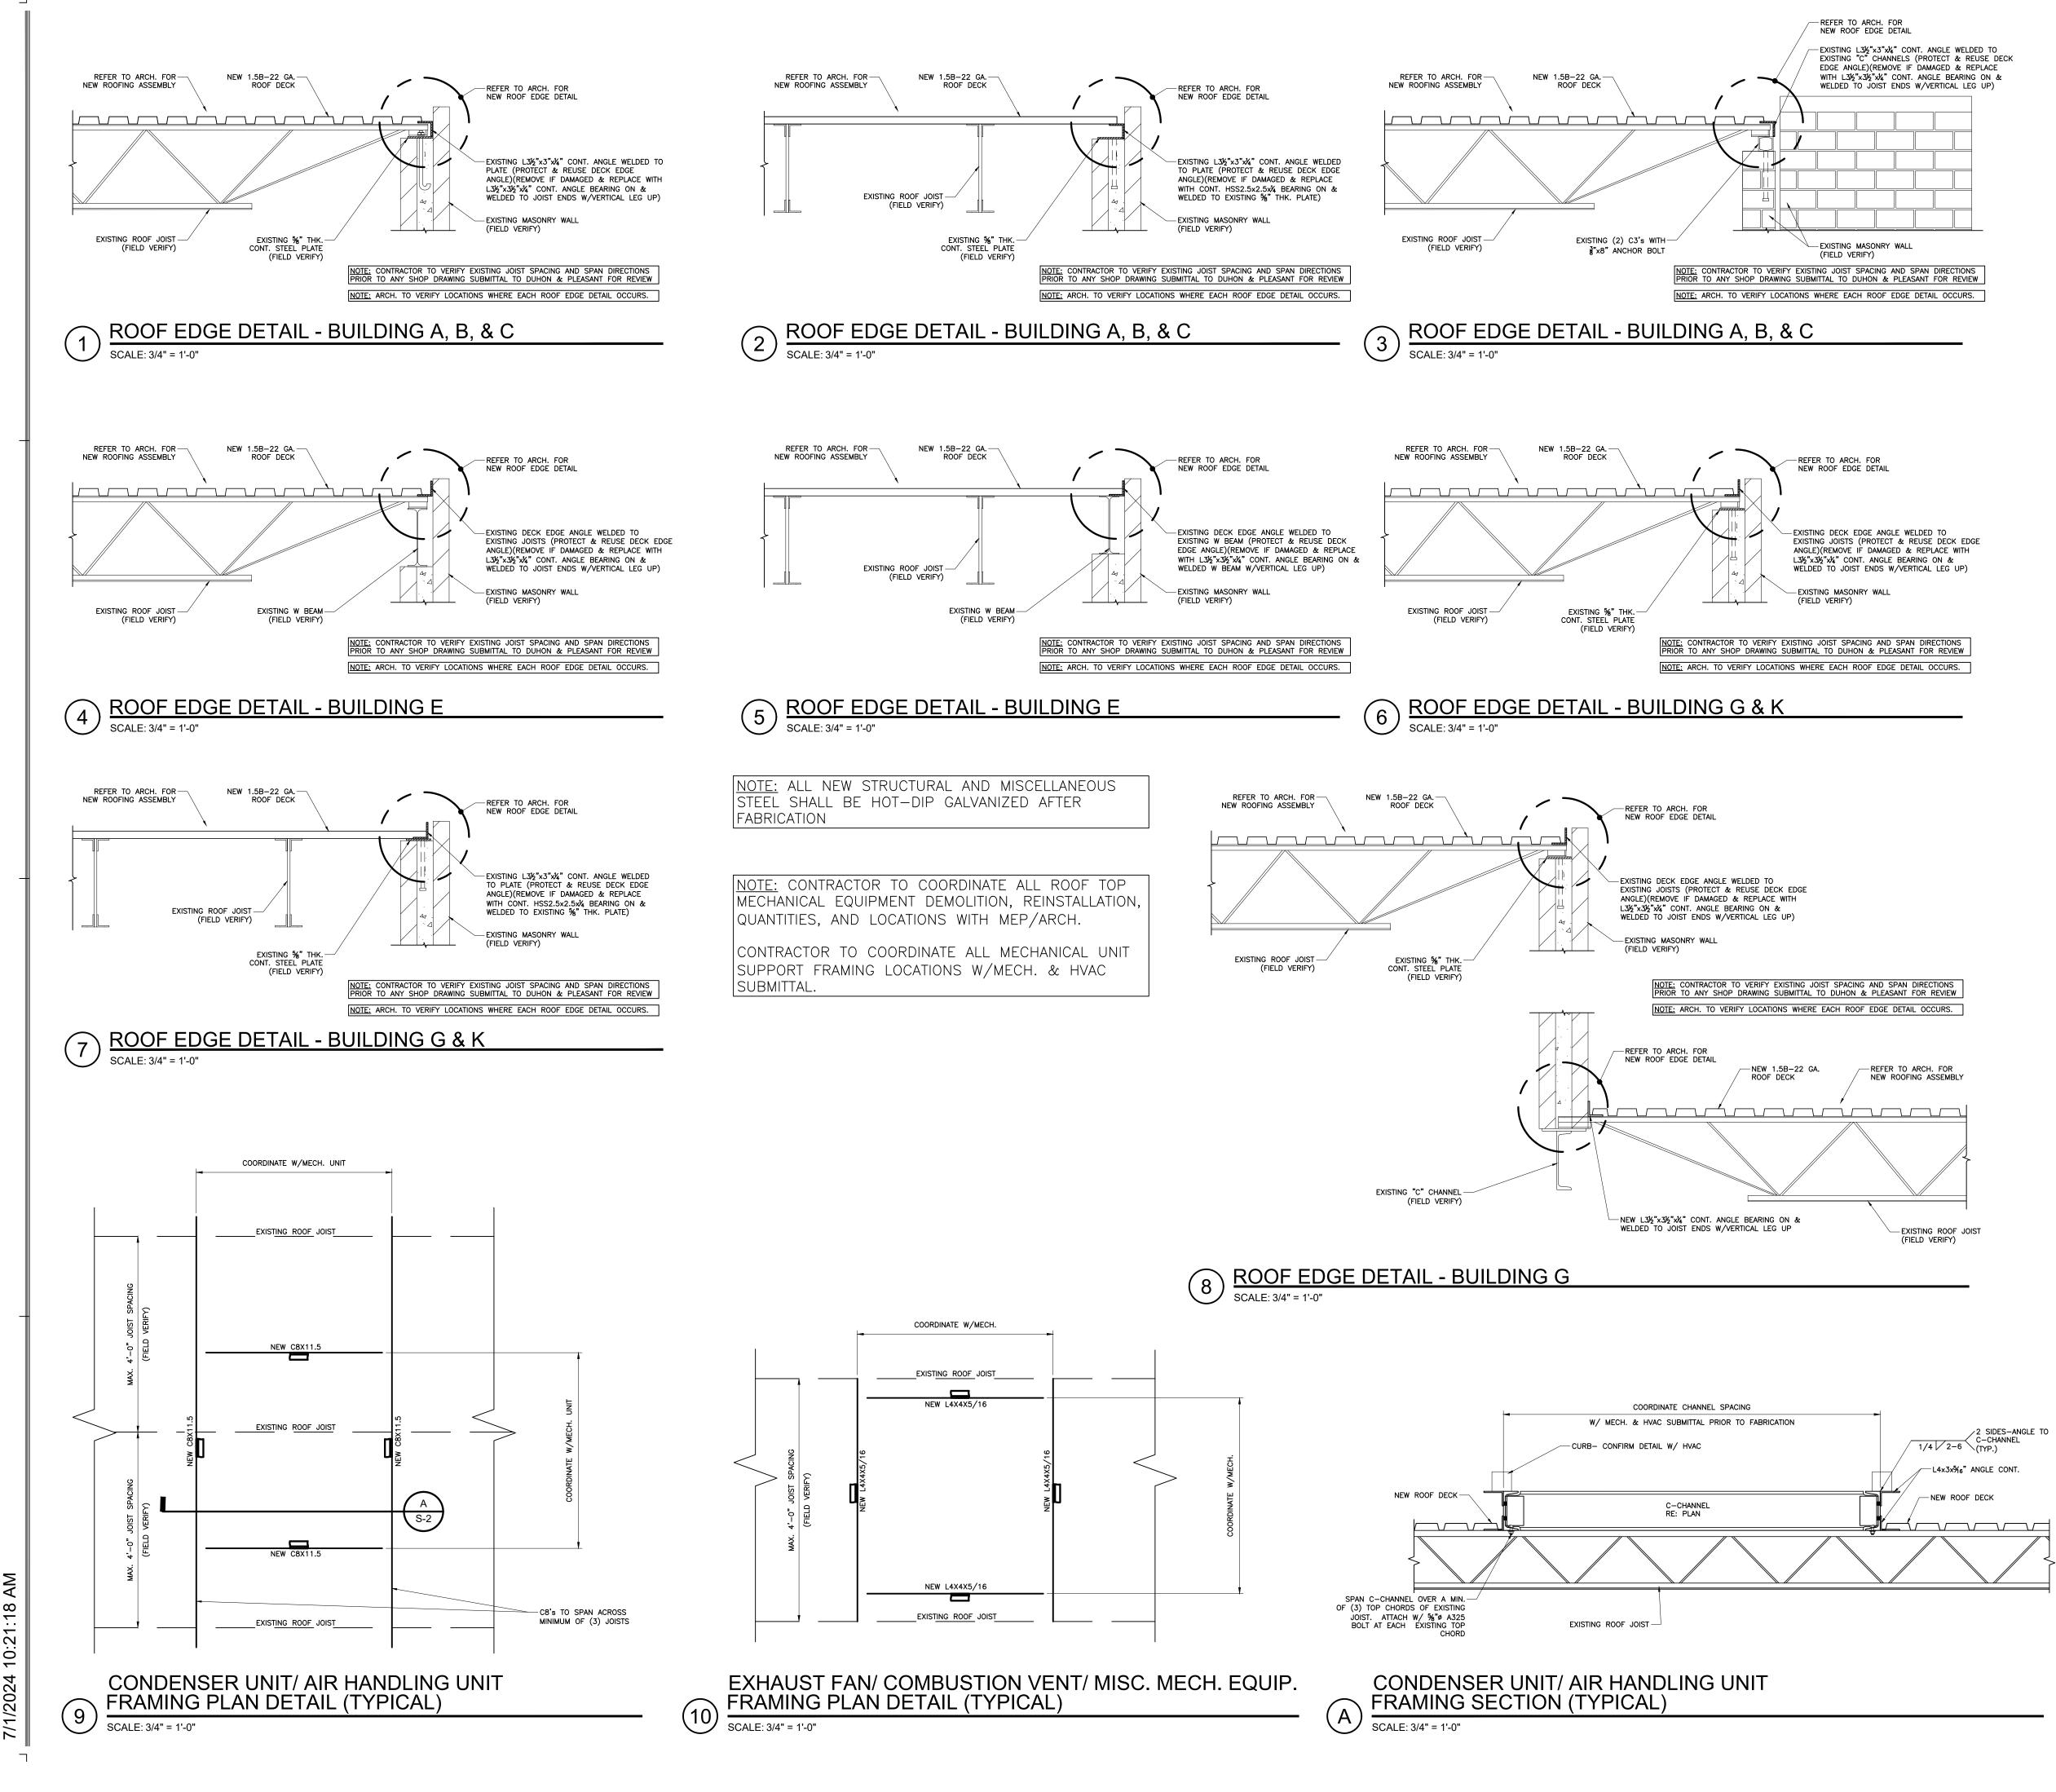

10:21:18 7/1/2024


DUHON + PLEASANT


CIVIL & STRUCTURAL ENGINEERS

337 564 5918 WWW.DANDPENGINEERS.COM


5393 BIG LAKE ROAD LAKE CHARLES LA 70605


 $\mathbf{R} \mathbf{M}$ 111 HULLETY Σä ARCHITECT \square 0 $\mathbf{\gamma}$ 0 Ā Ô Т Ď SAIRS OL 3, LA 06,07 SCHO REP HIGH Ś CHARLES, -01,03,04,05,0 S **McNEE** ARISH ≝ш Š Ш ∕ LAKE HL-003-0 HURRI BAR 220 Δ \supset 111 \geq Ú © COPYRIGHT 2023, RANDY M. GOODLOE, A.I.A. APAC ALL INFORMATION, EITHER DRAWN, WRITTEN OR IMPLIED APPEARING IN THIS DOCUMENT SHALL NOT BE DUPLICATED, DISCLOSED, OR OTHERWISE USED WITHOUT THE WRITTEN PERMISSION OF THE AUTHOR, RANDY M. GOODLOE, AIA APAC. THIS DOCUMENT IS AN INSTRUMENT OF SERVICE AND IS THE SOLE PROPERTY OF THE AUTHOR. FURTHERMORE THE USE OF THIS DOCUMENT FOR ANY PURPOSE SHALL BE REVOKED, IF THE INTENT OF THE DESIGN OR THE CONSTRUCTION TECHNIQUES OR DETAILS SHOWN HEREIN ARE NOT ADHERED TO OR THE CONTRACTUAL AGREEMENT GOVERNING THEIR USE ARE NOT STRICTLY ADHERED TO RMG PROJECT NO. 20042-01-G OWNER PROJECT NO. HL-003-01,03,04,05,06,07 PROJECT MANAGER ΤМ DATE ISSUED 06.28.2024 REVISED manu SHEET NUMBER $C \cap$ S-Z ROOF REPAIR DETAILS

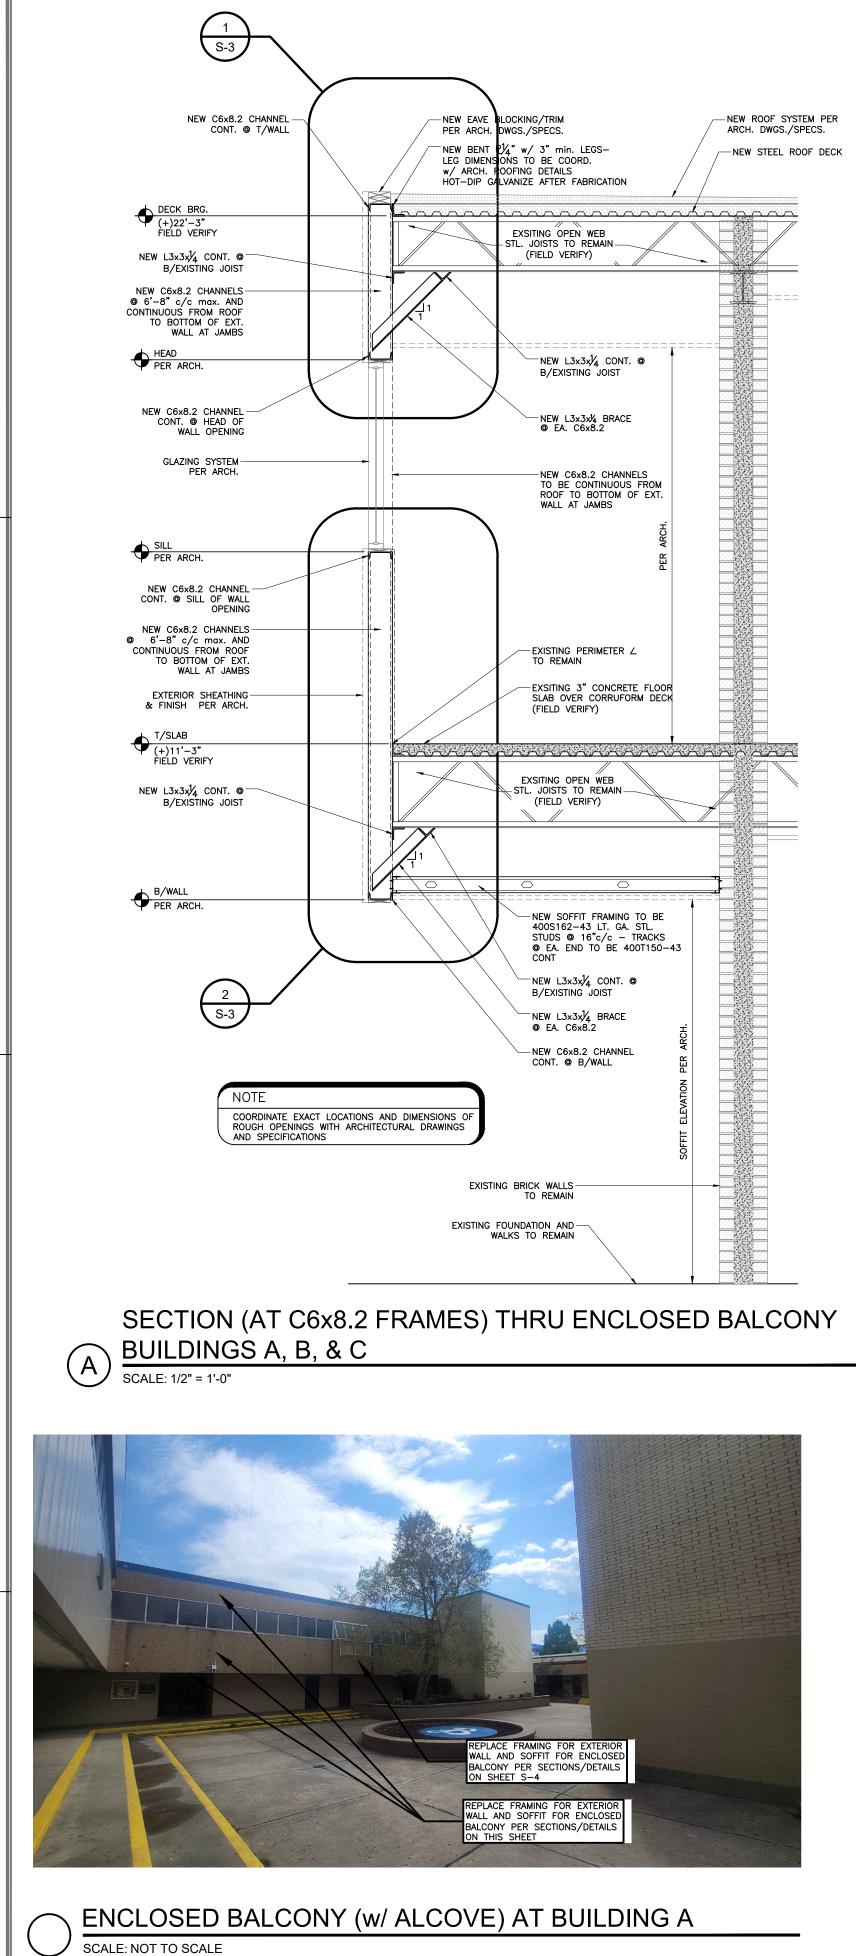


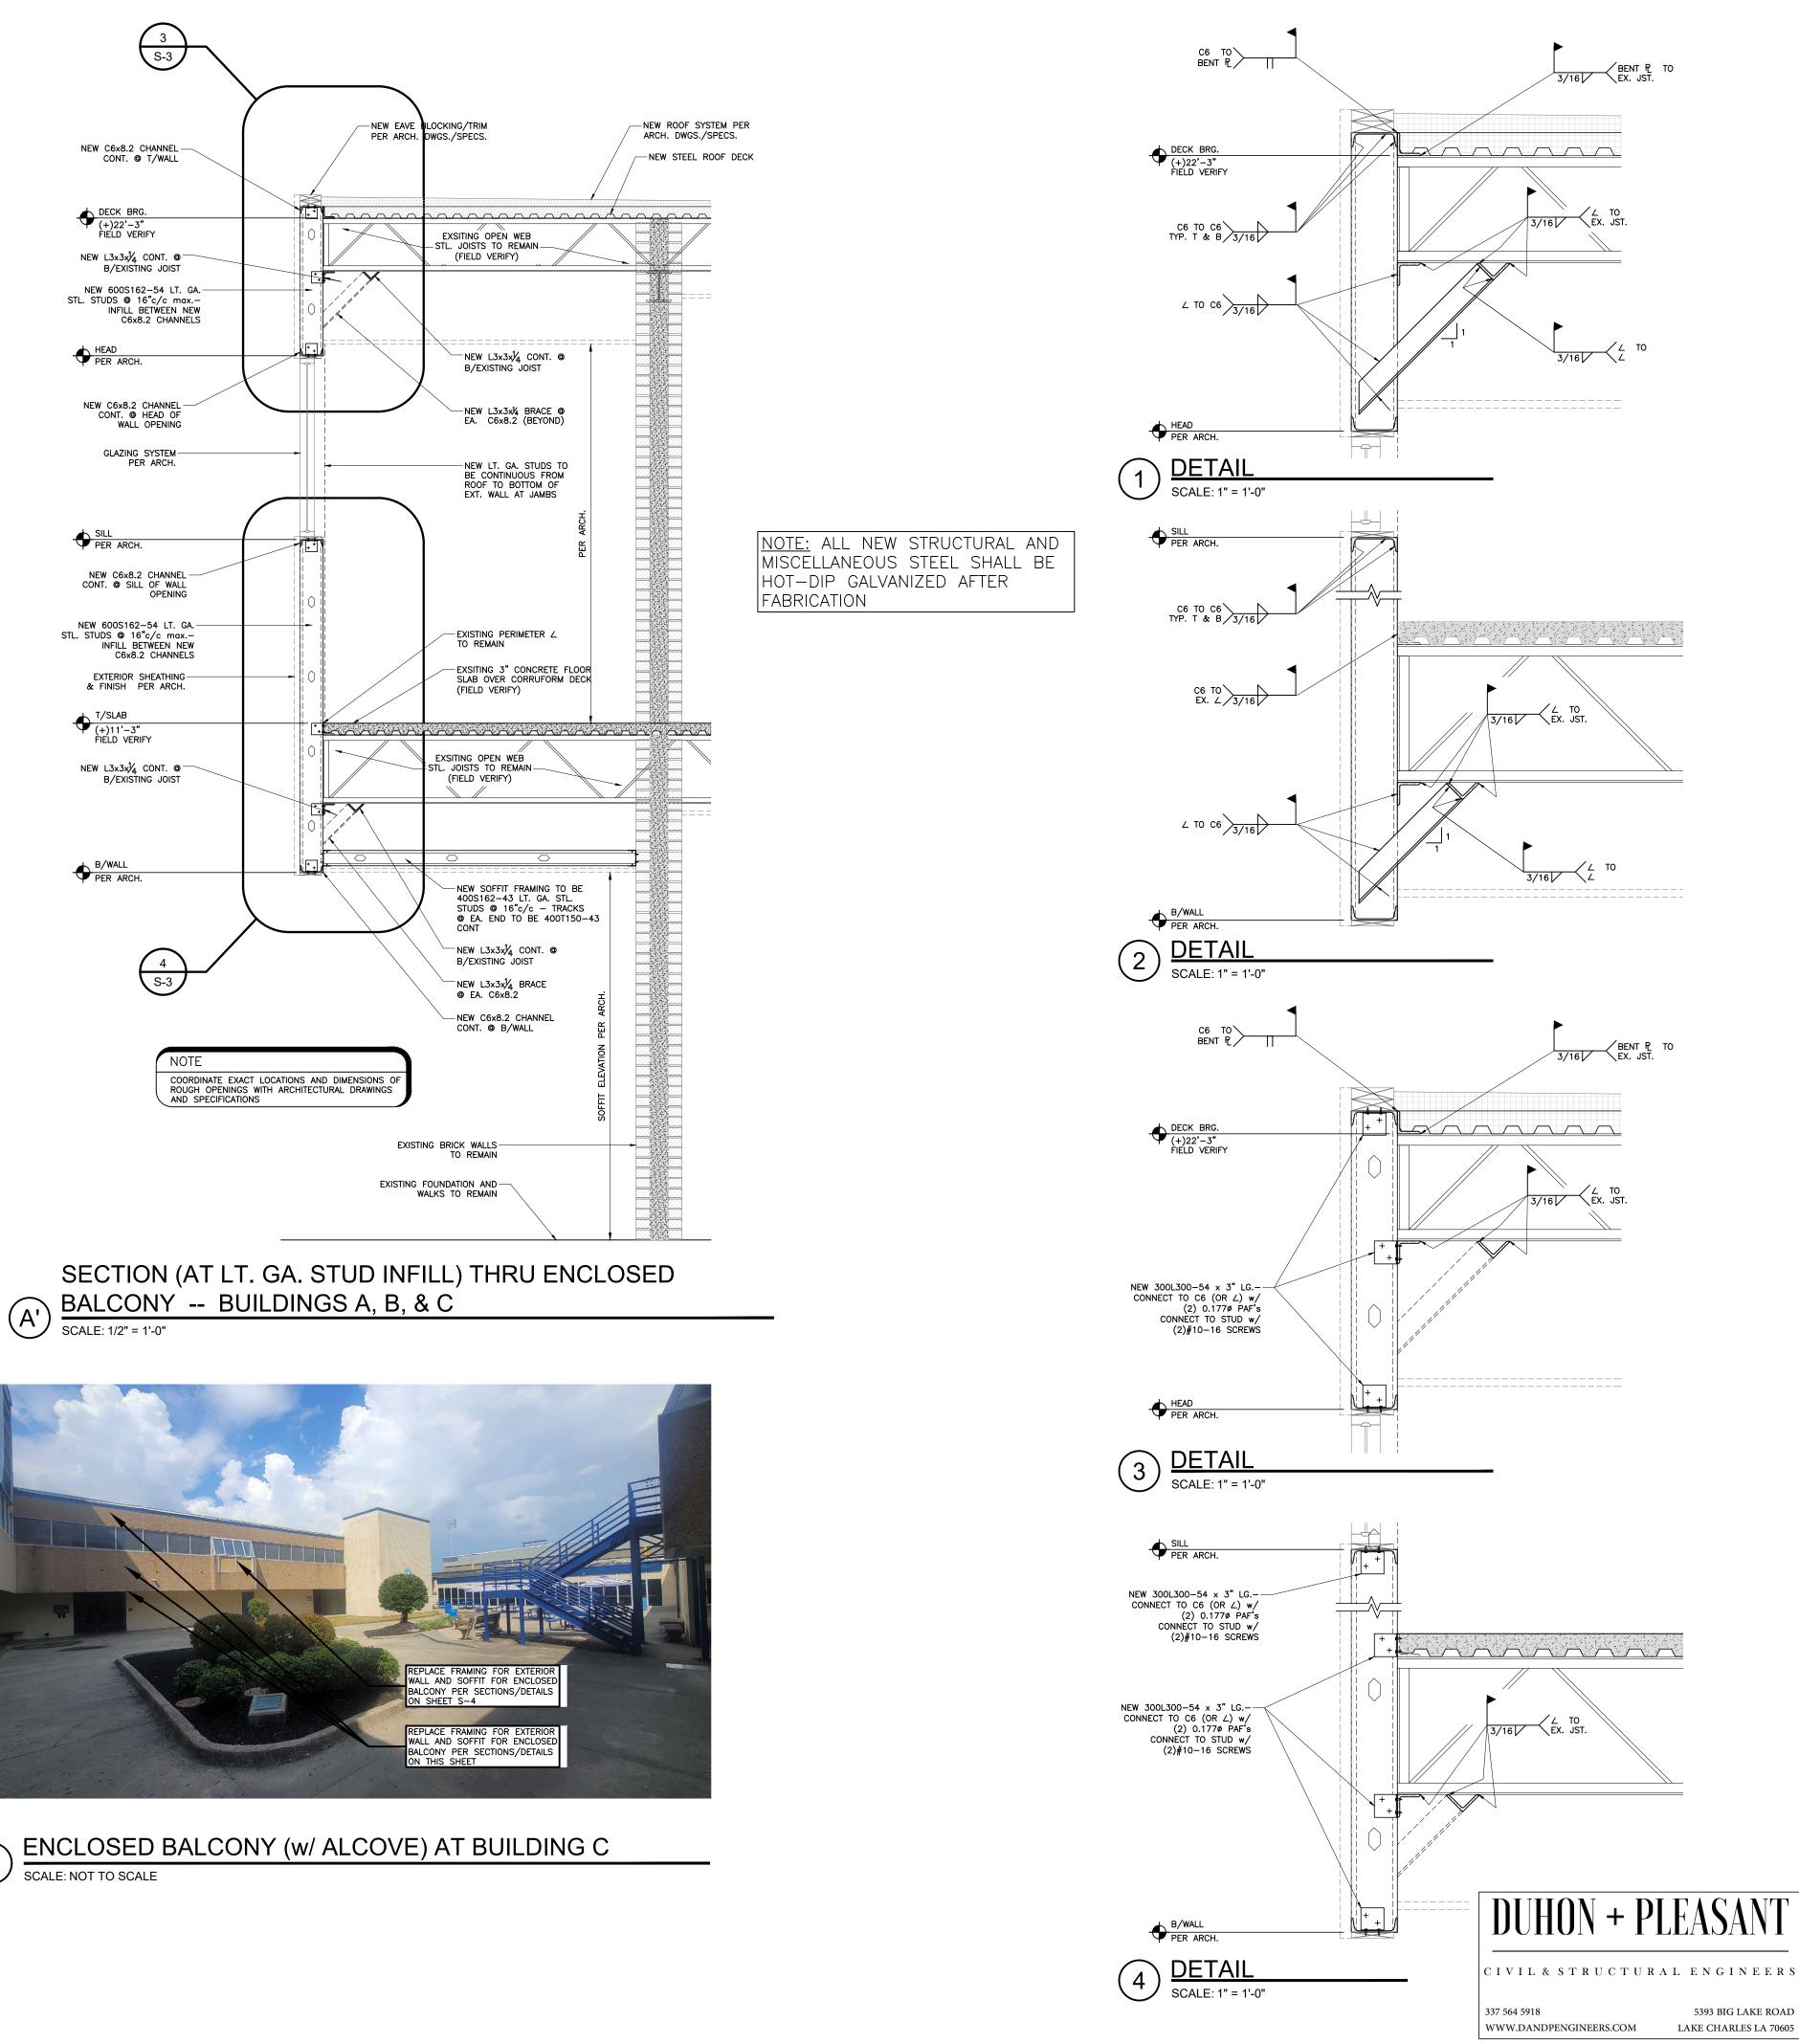


SCALE: NOT TO SCALE

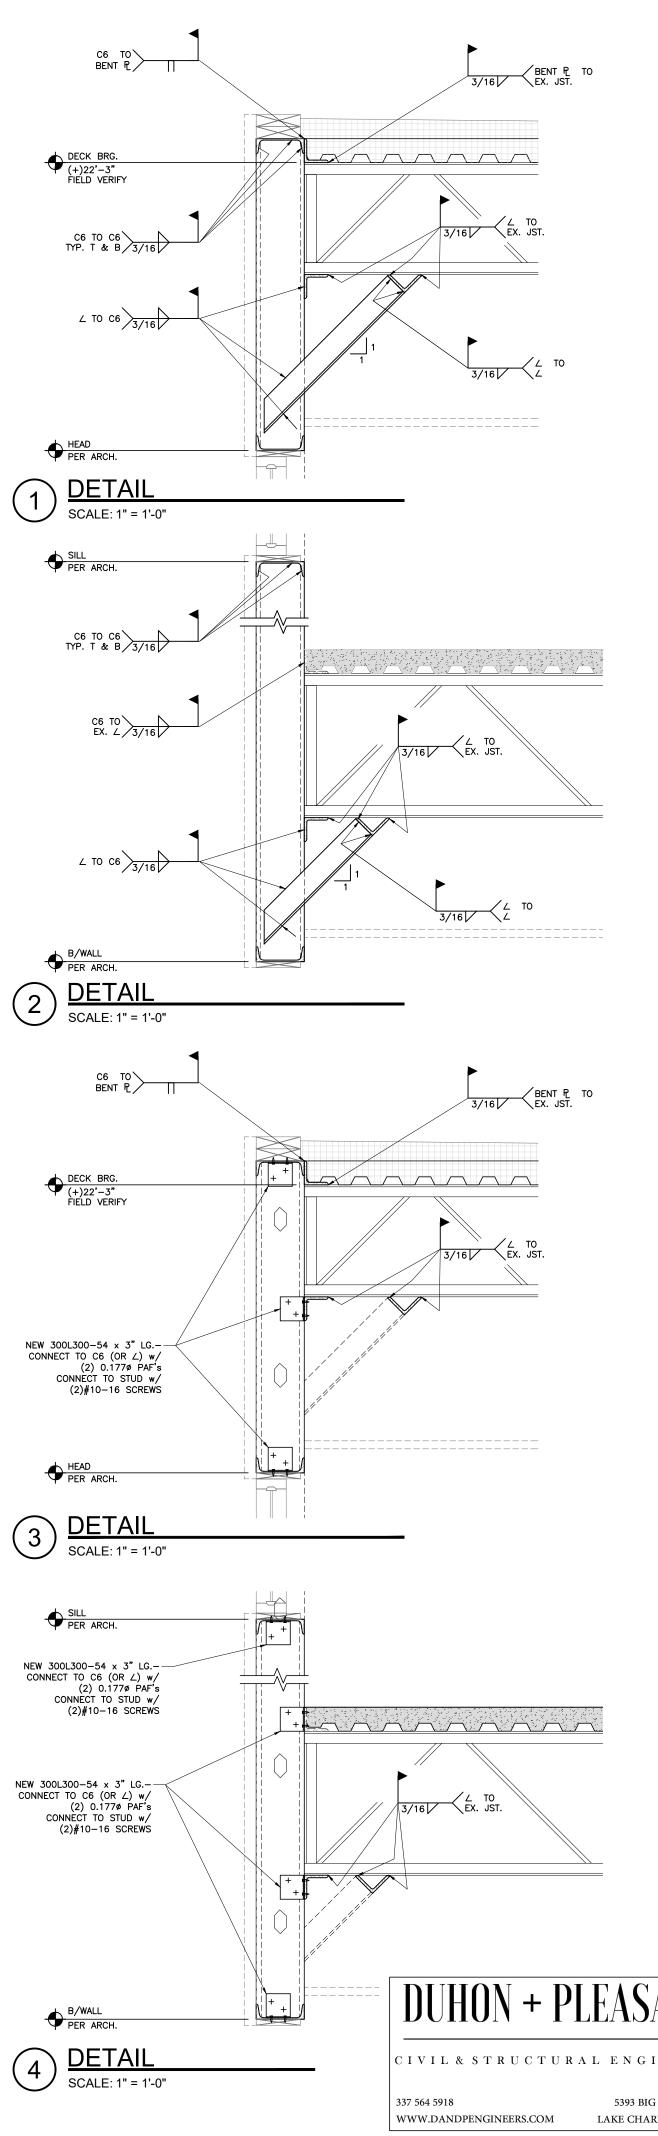

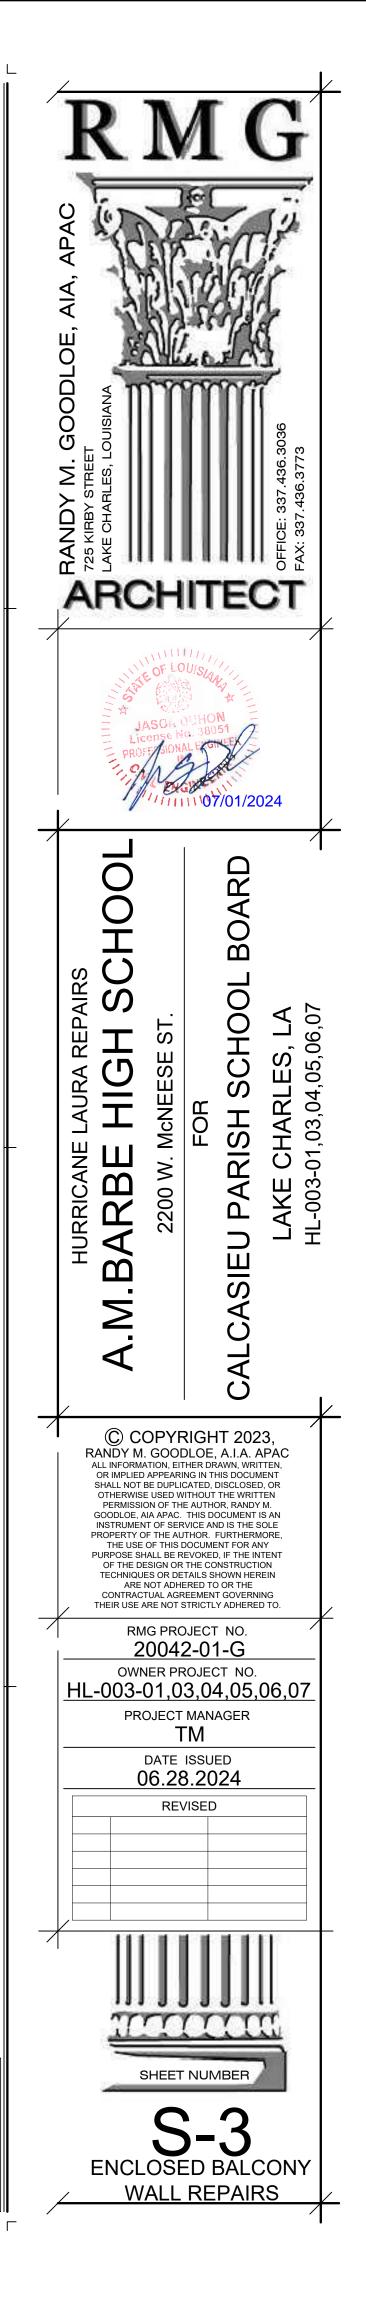


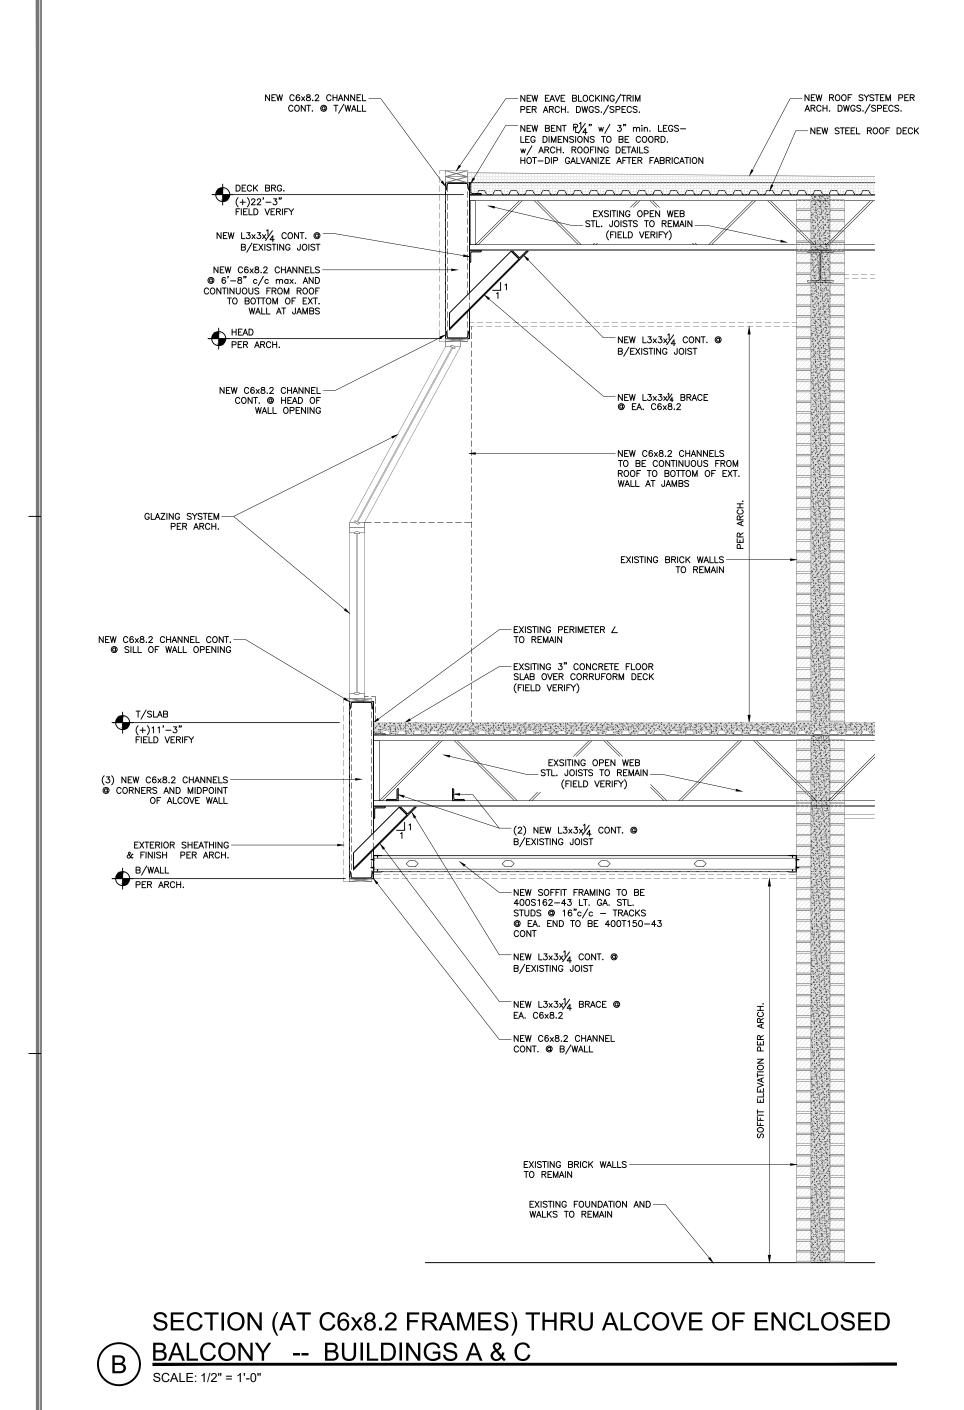

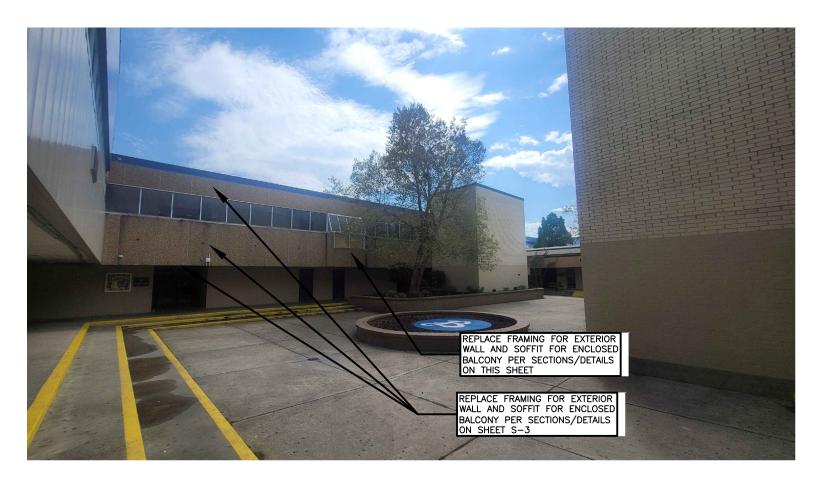






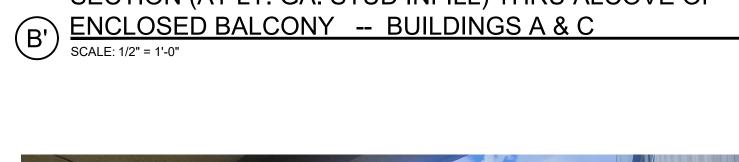



SECTION (AT LT. GA. STUD INFILL) THRU ALCOVE OF

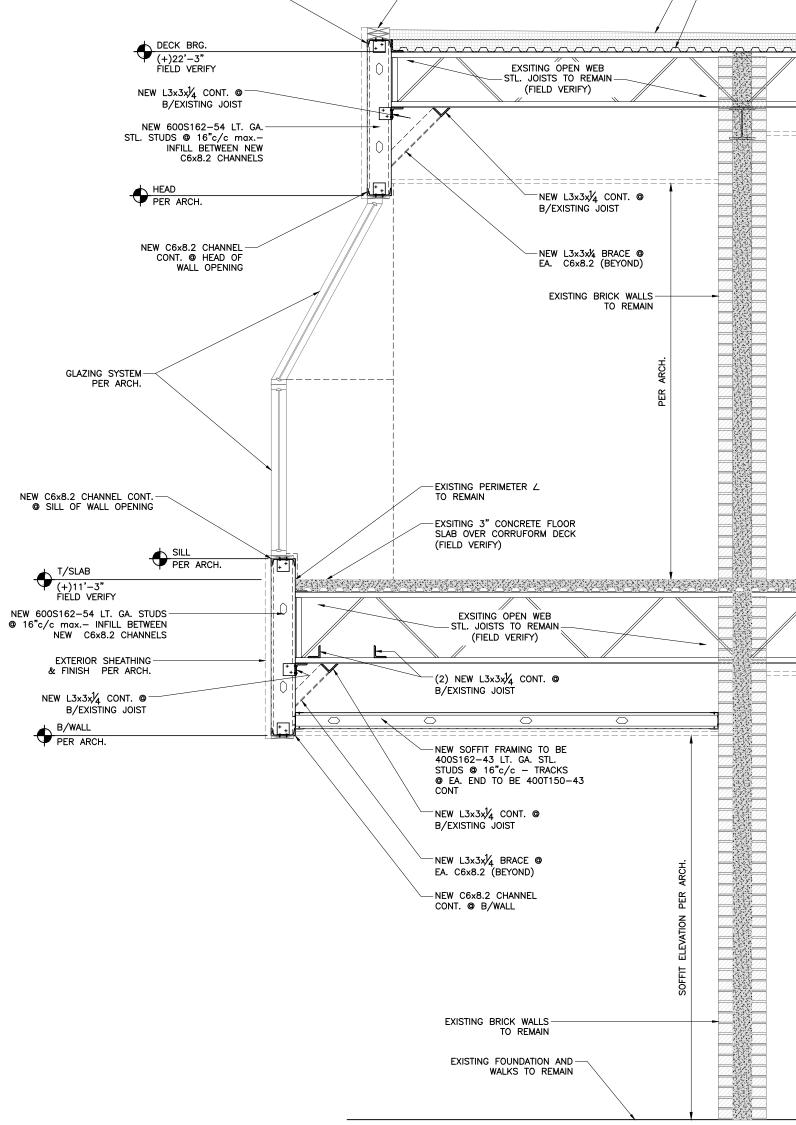


SCALE: NOT TO SCALE



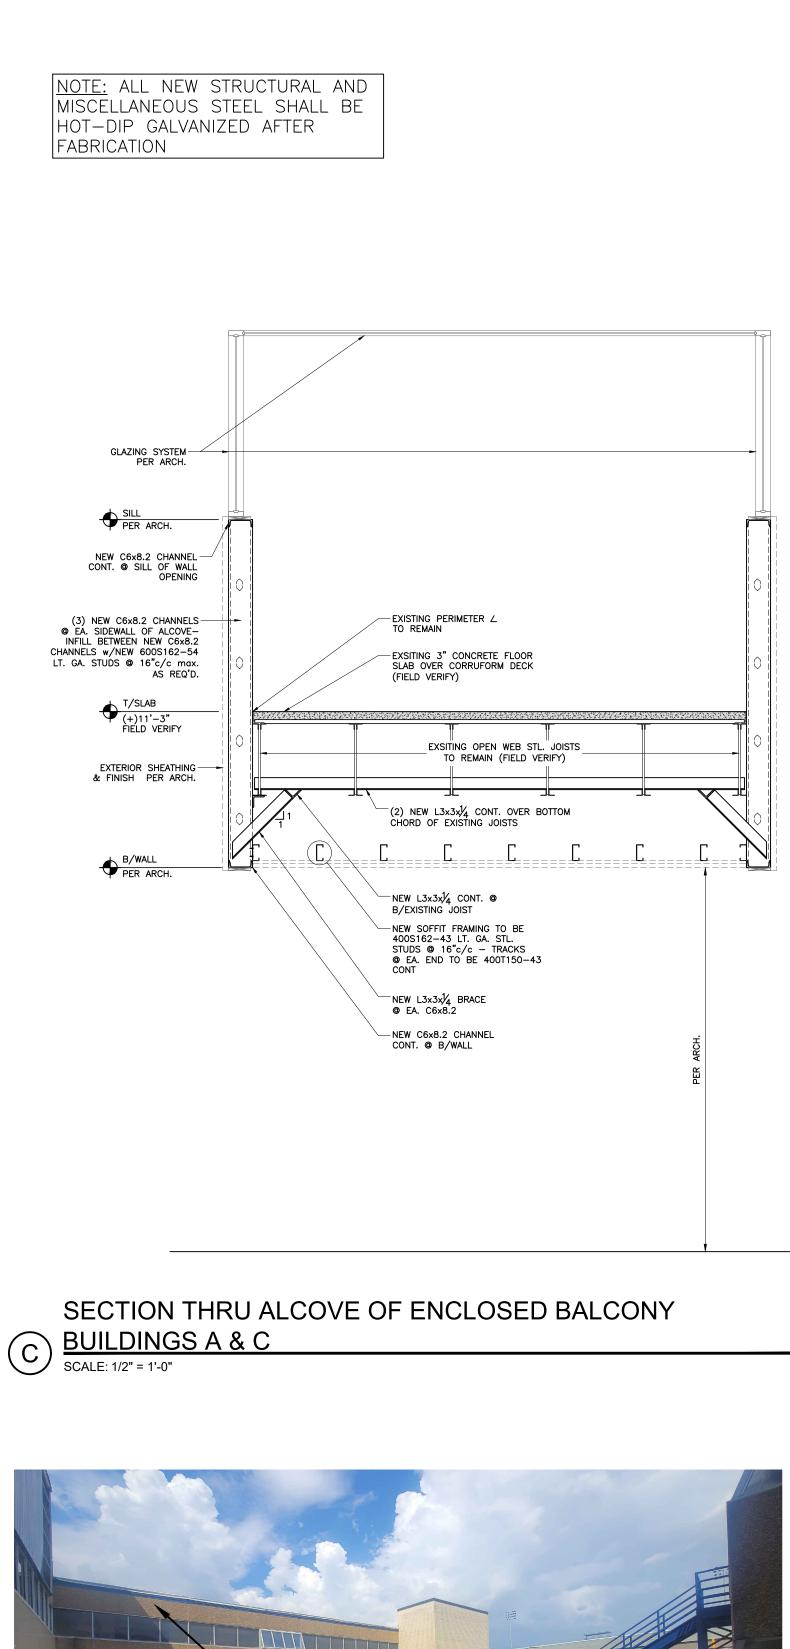

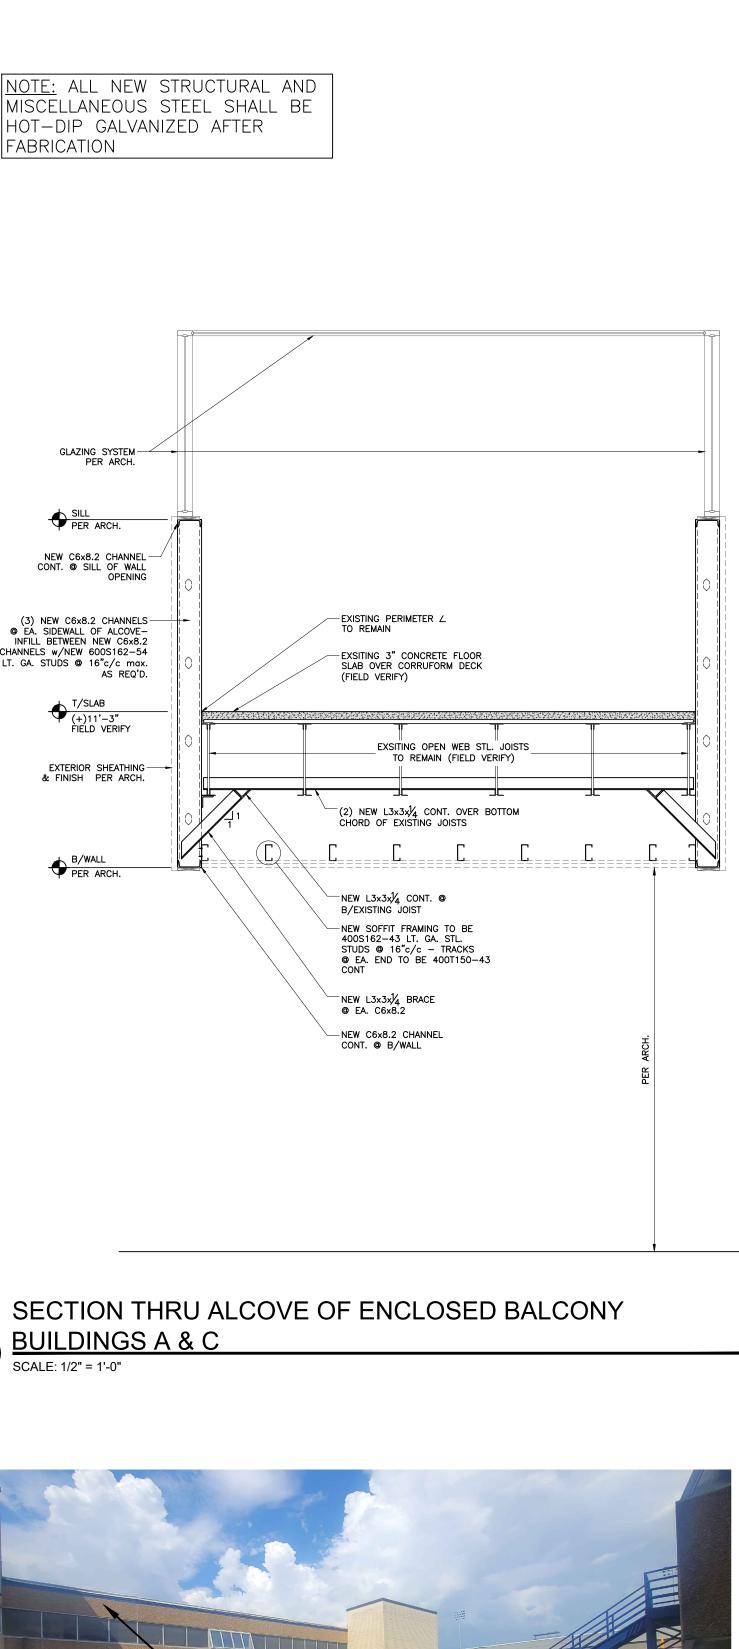

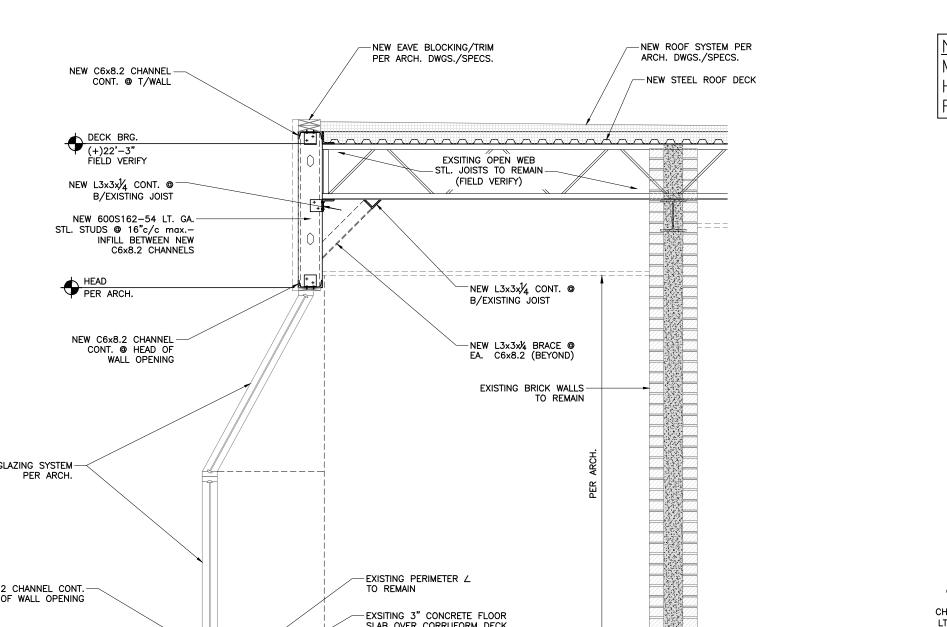


ENCLOSED BALCONY (w/ ALCOVE) AT BUILDING C


DUHON + PLEASANT


CIVIL & STRUCTURAL ENGINEERS


337 564 5918 WWW.DANDPENGINEERS.COM

5393 BIG LAKE ROAD LAKE CHARLES LA 70605

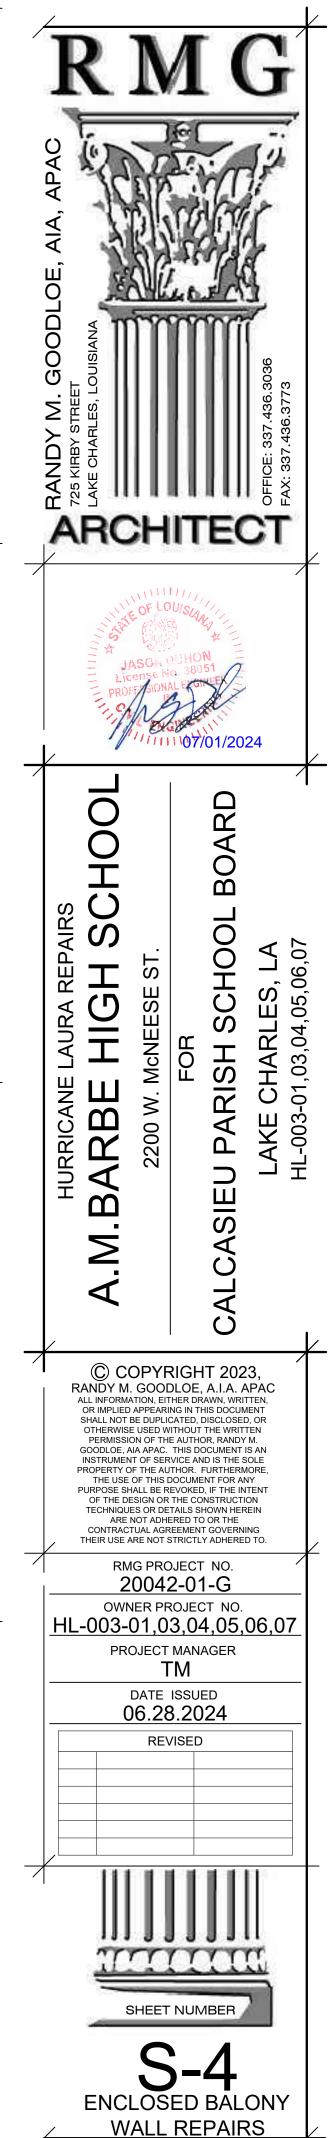


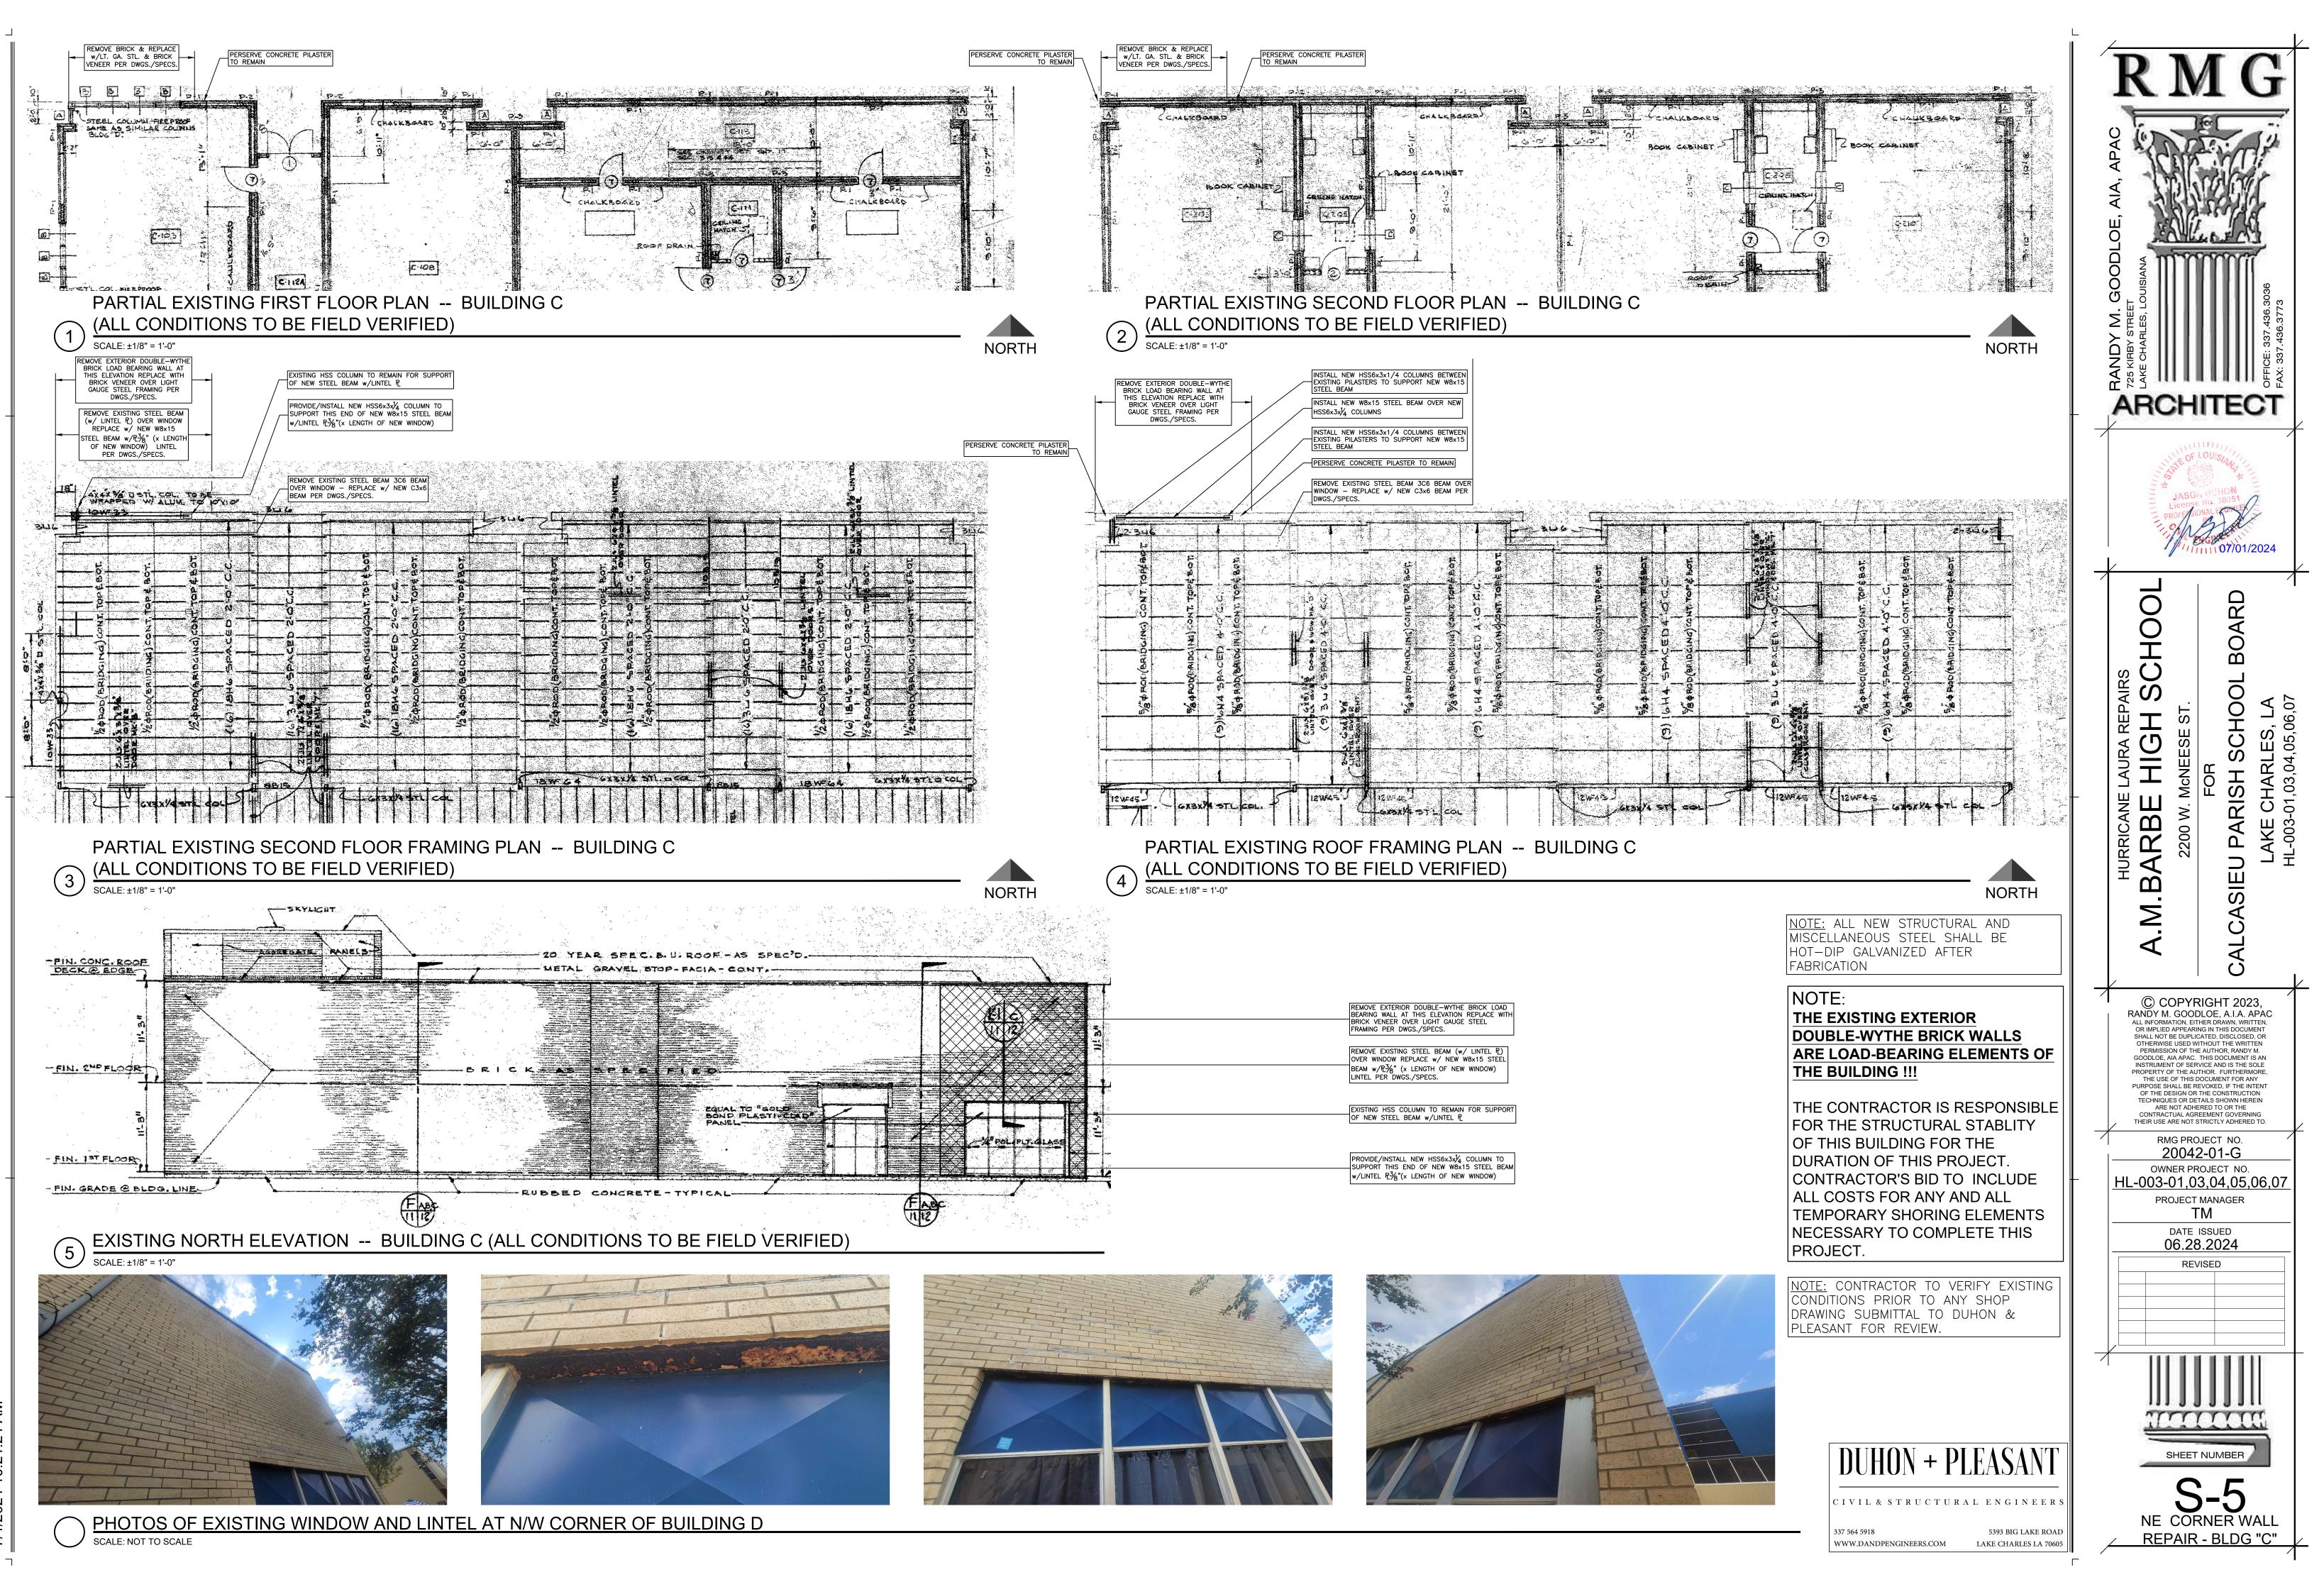

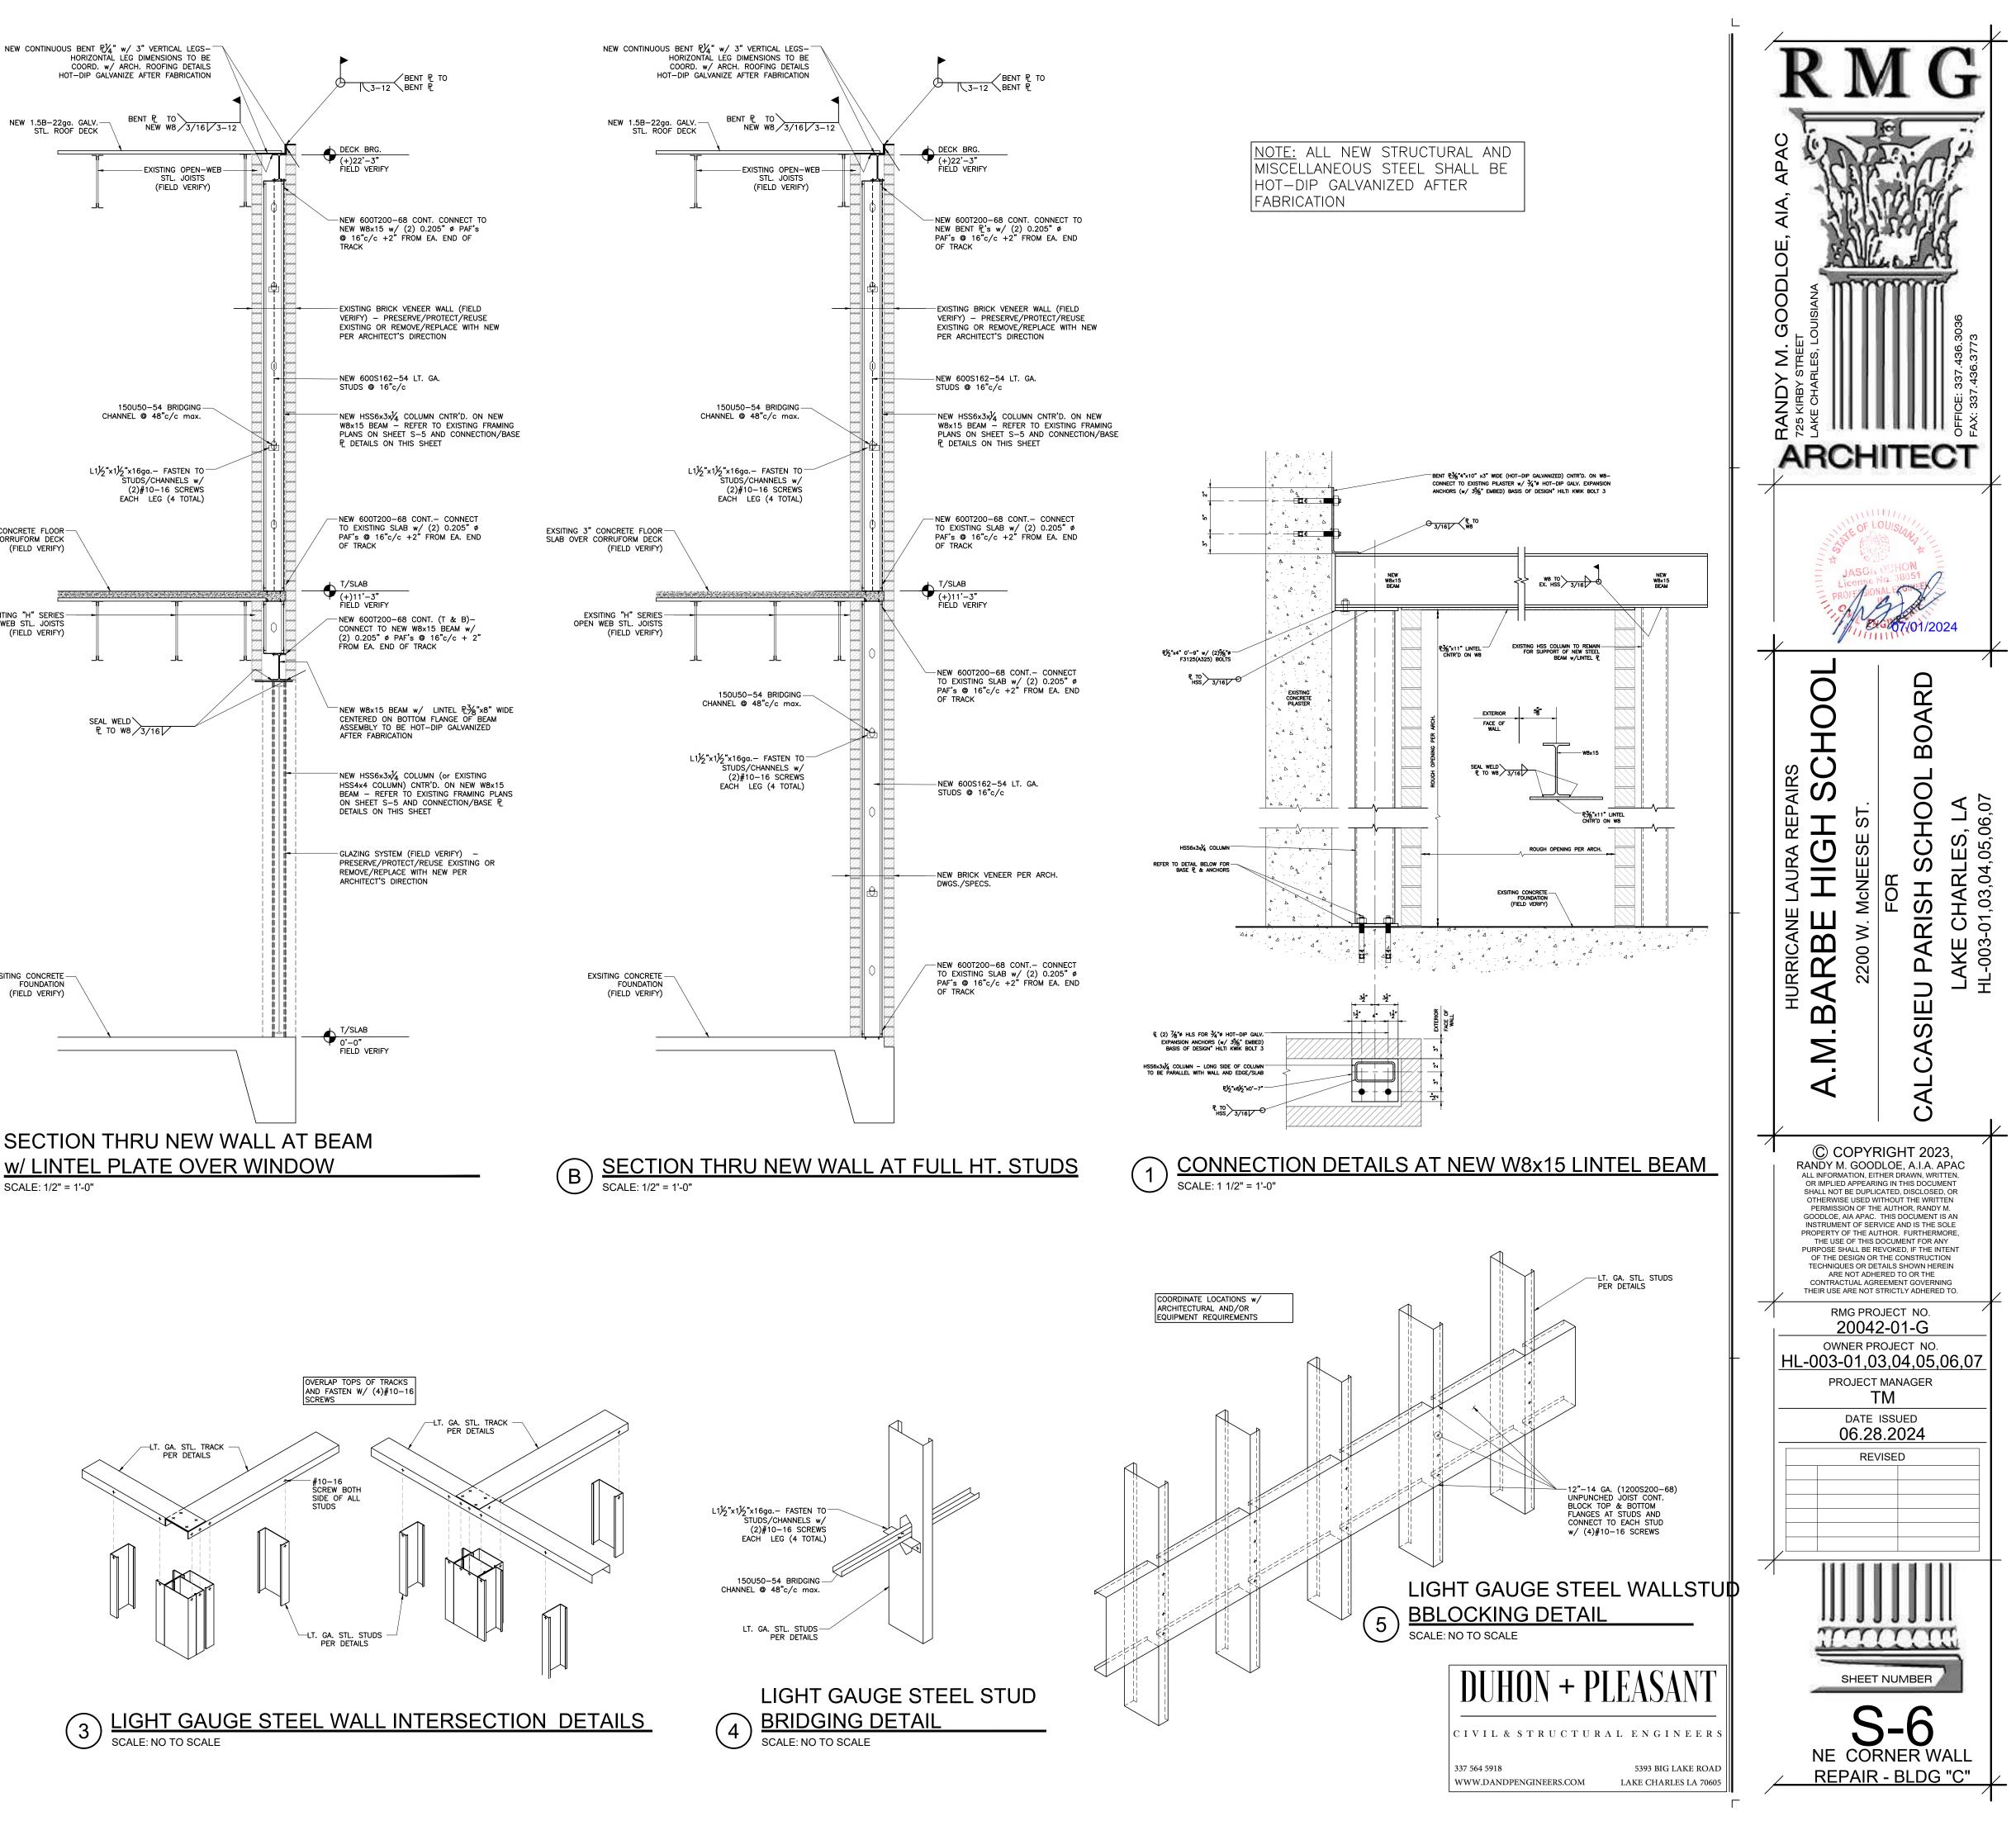

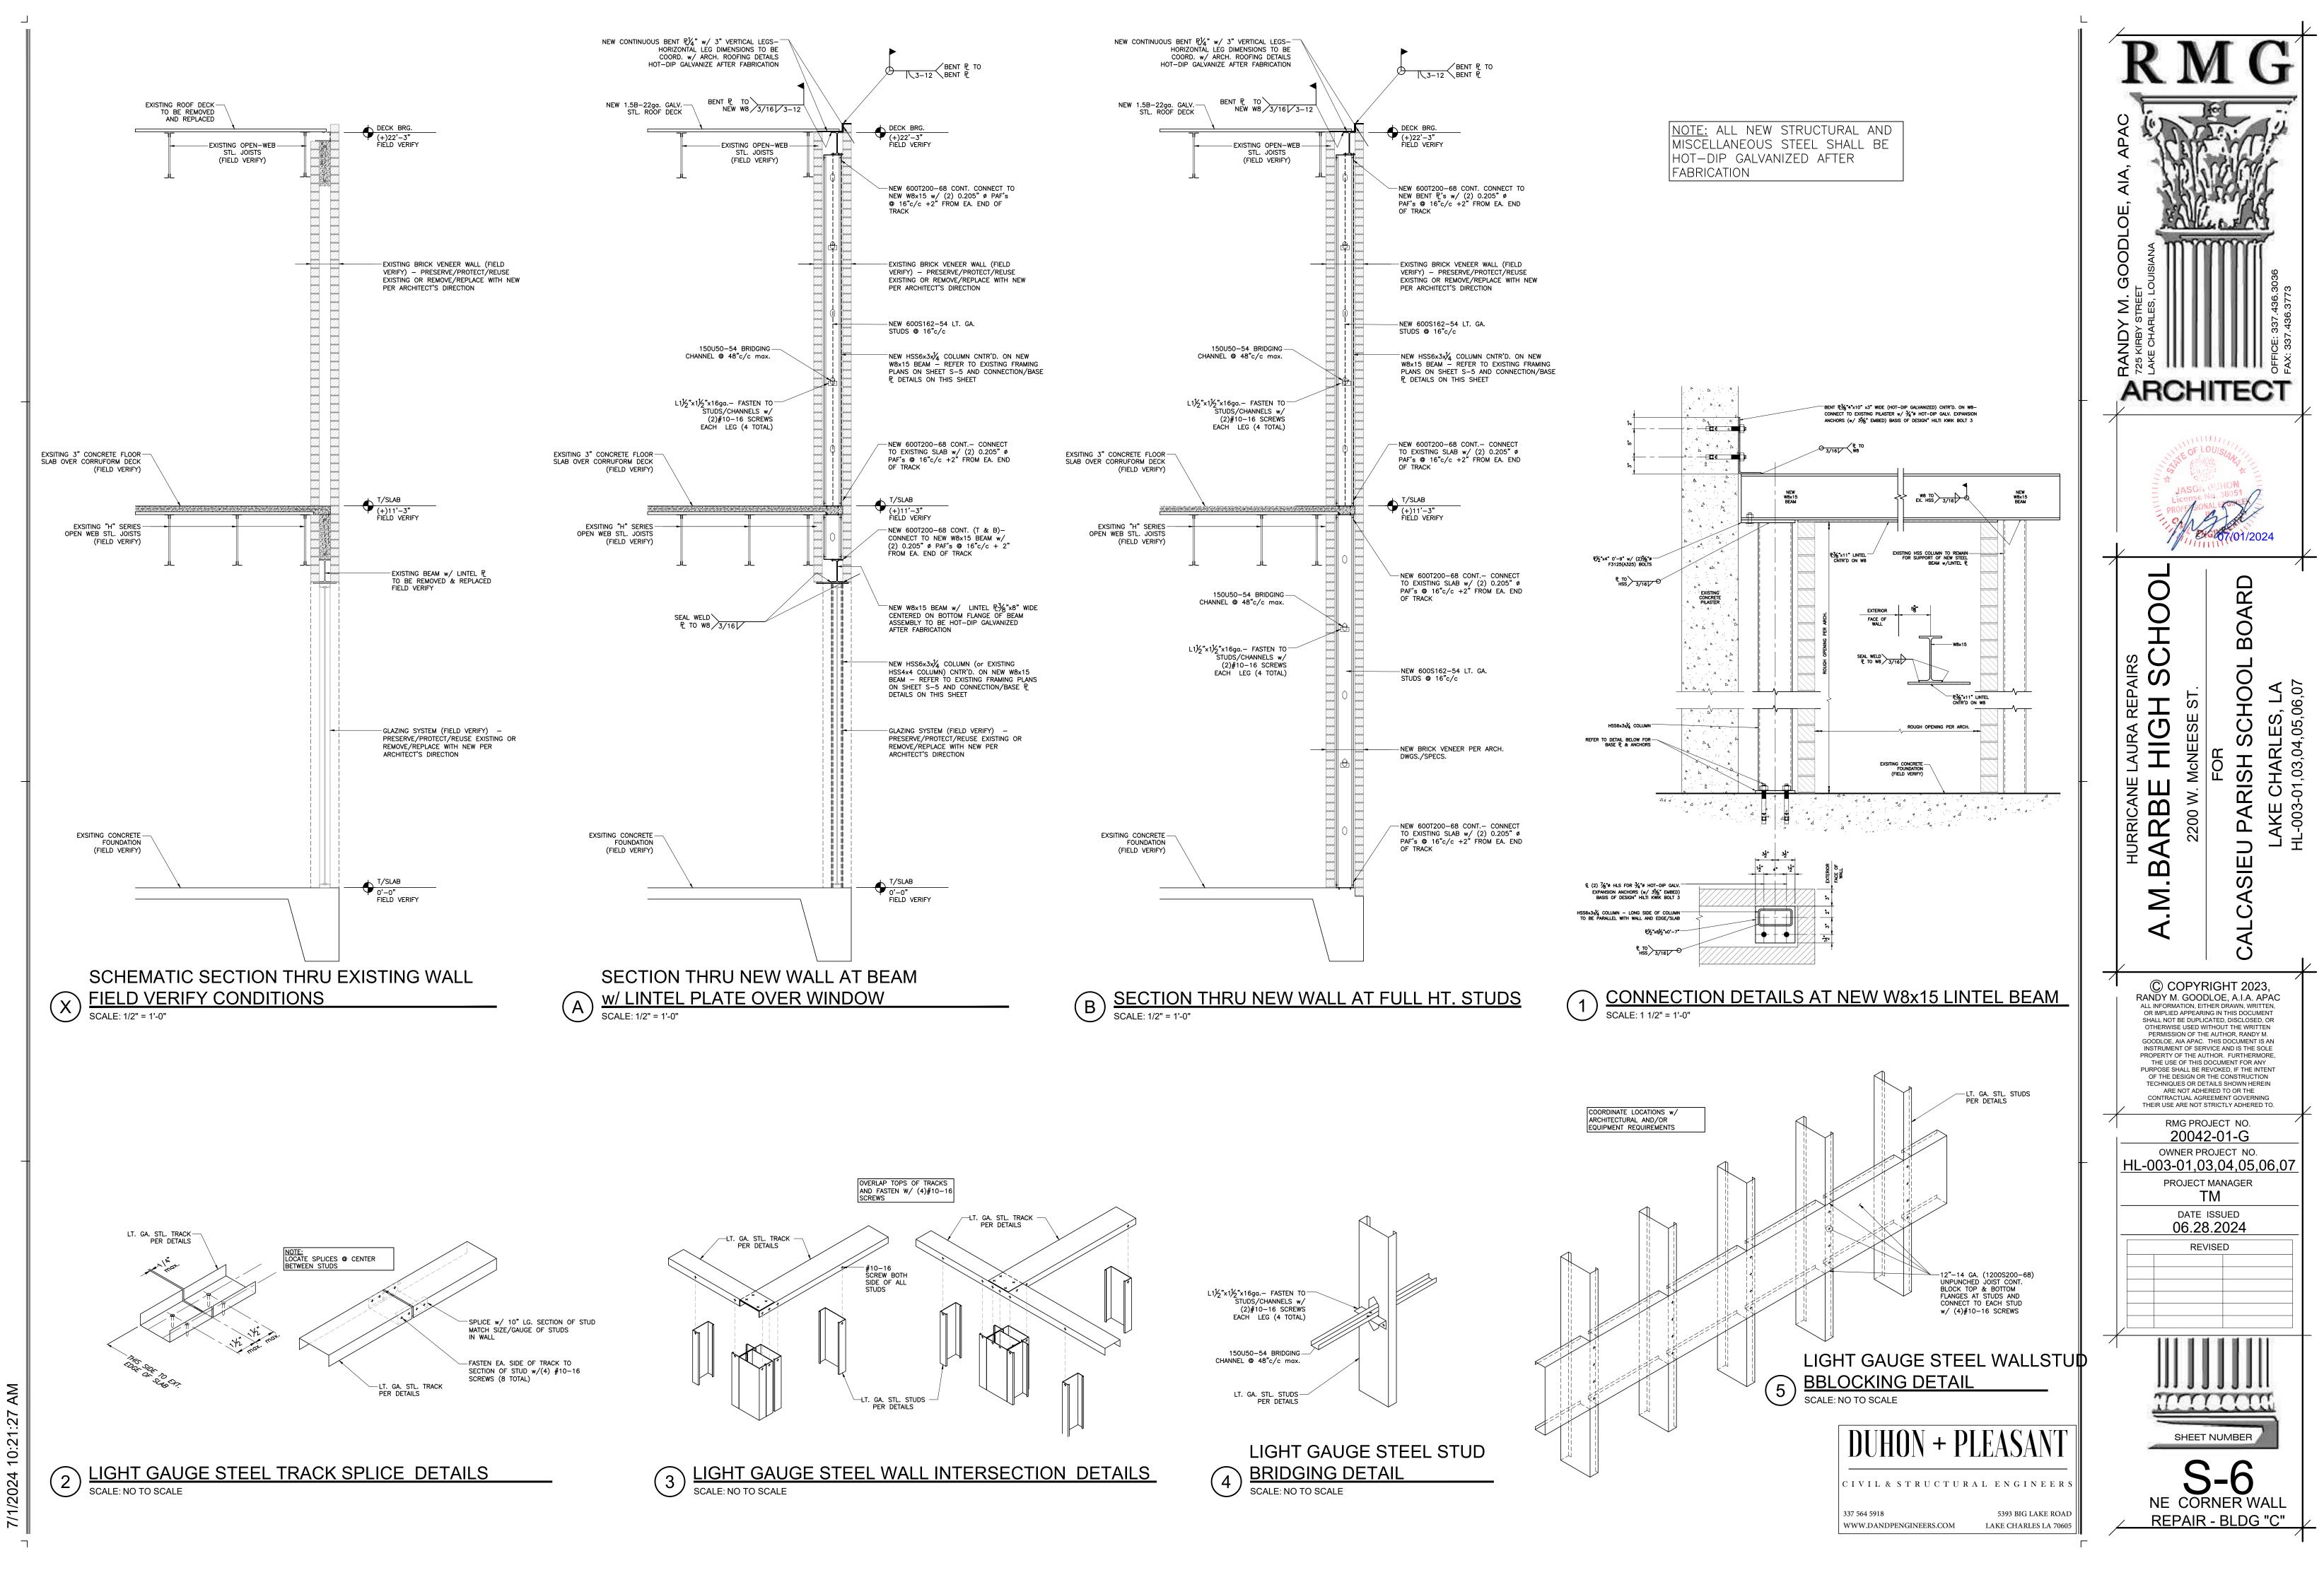

7/1/2024

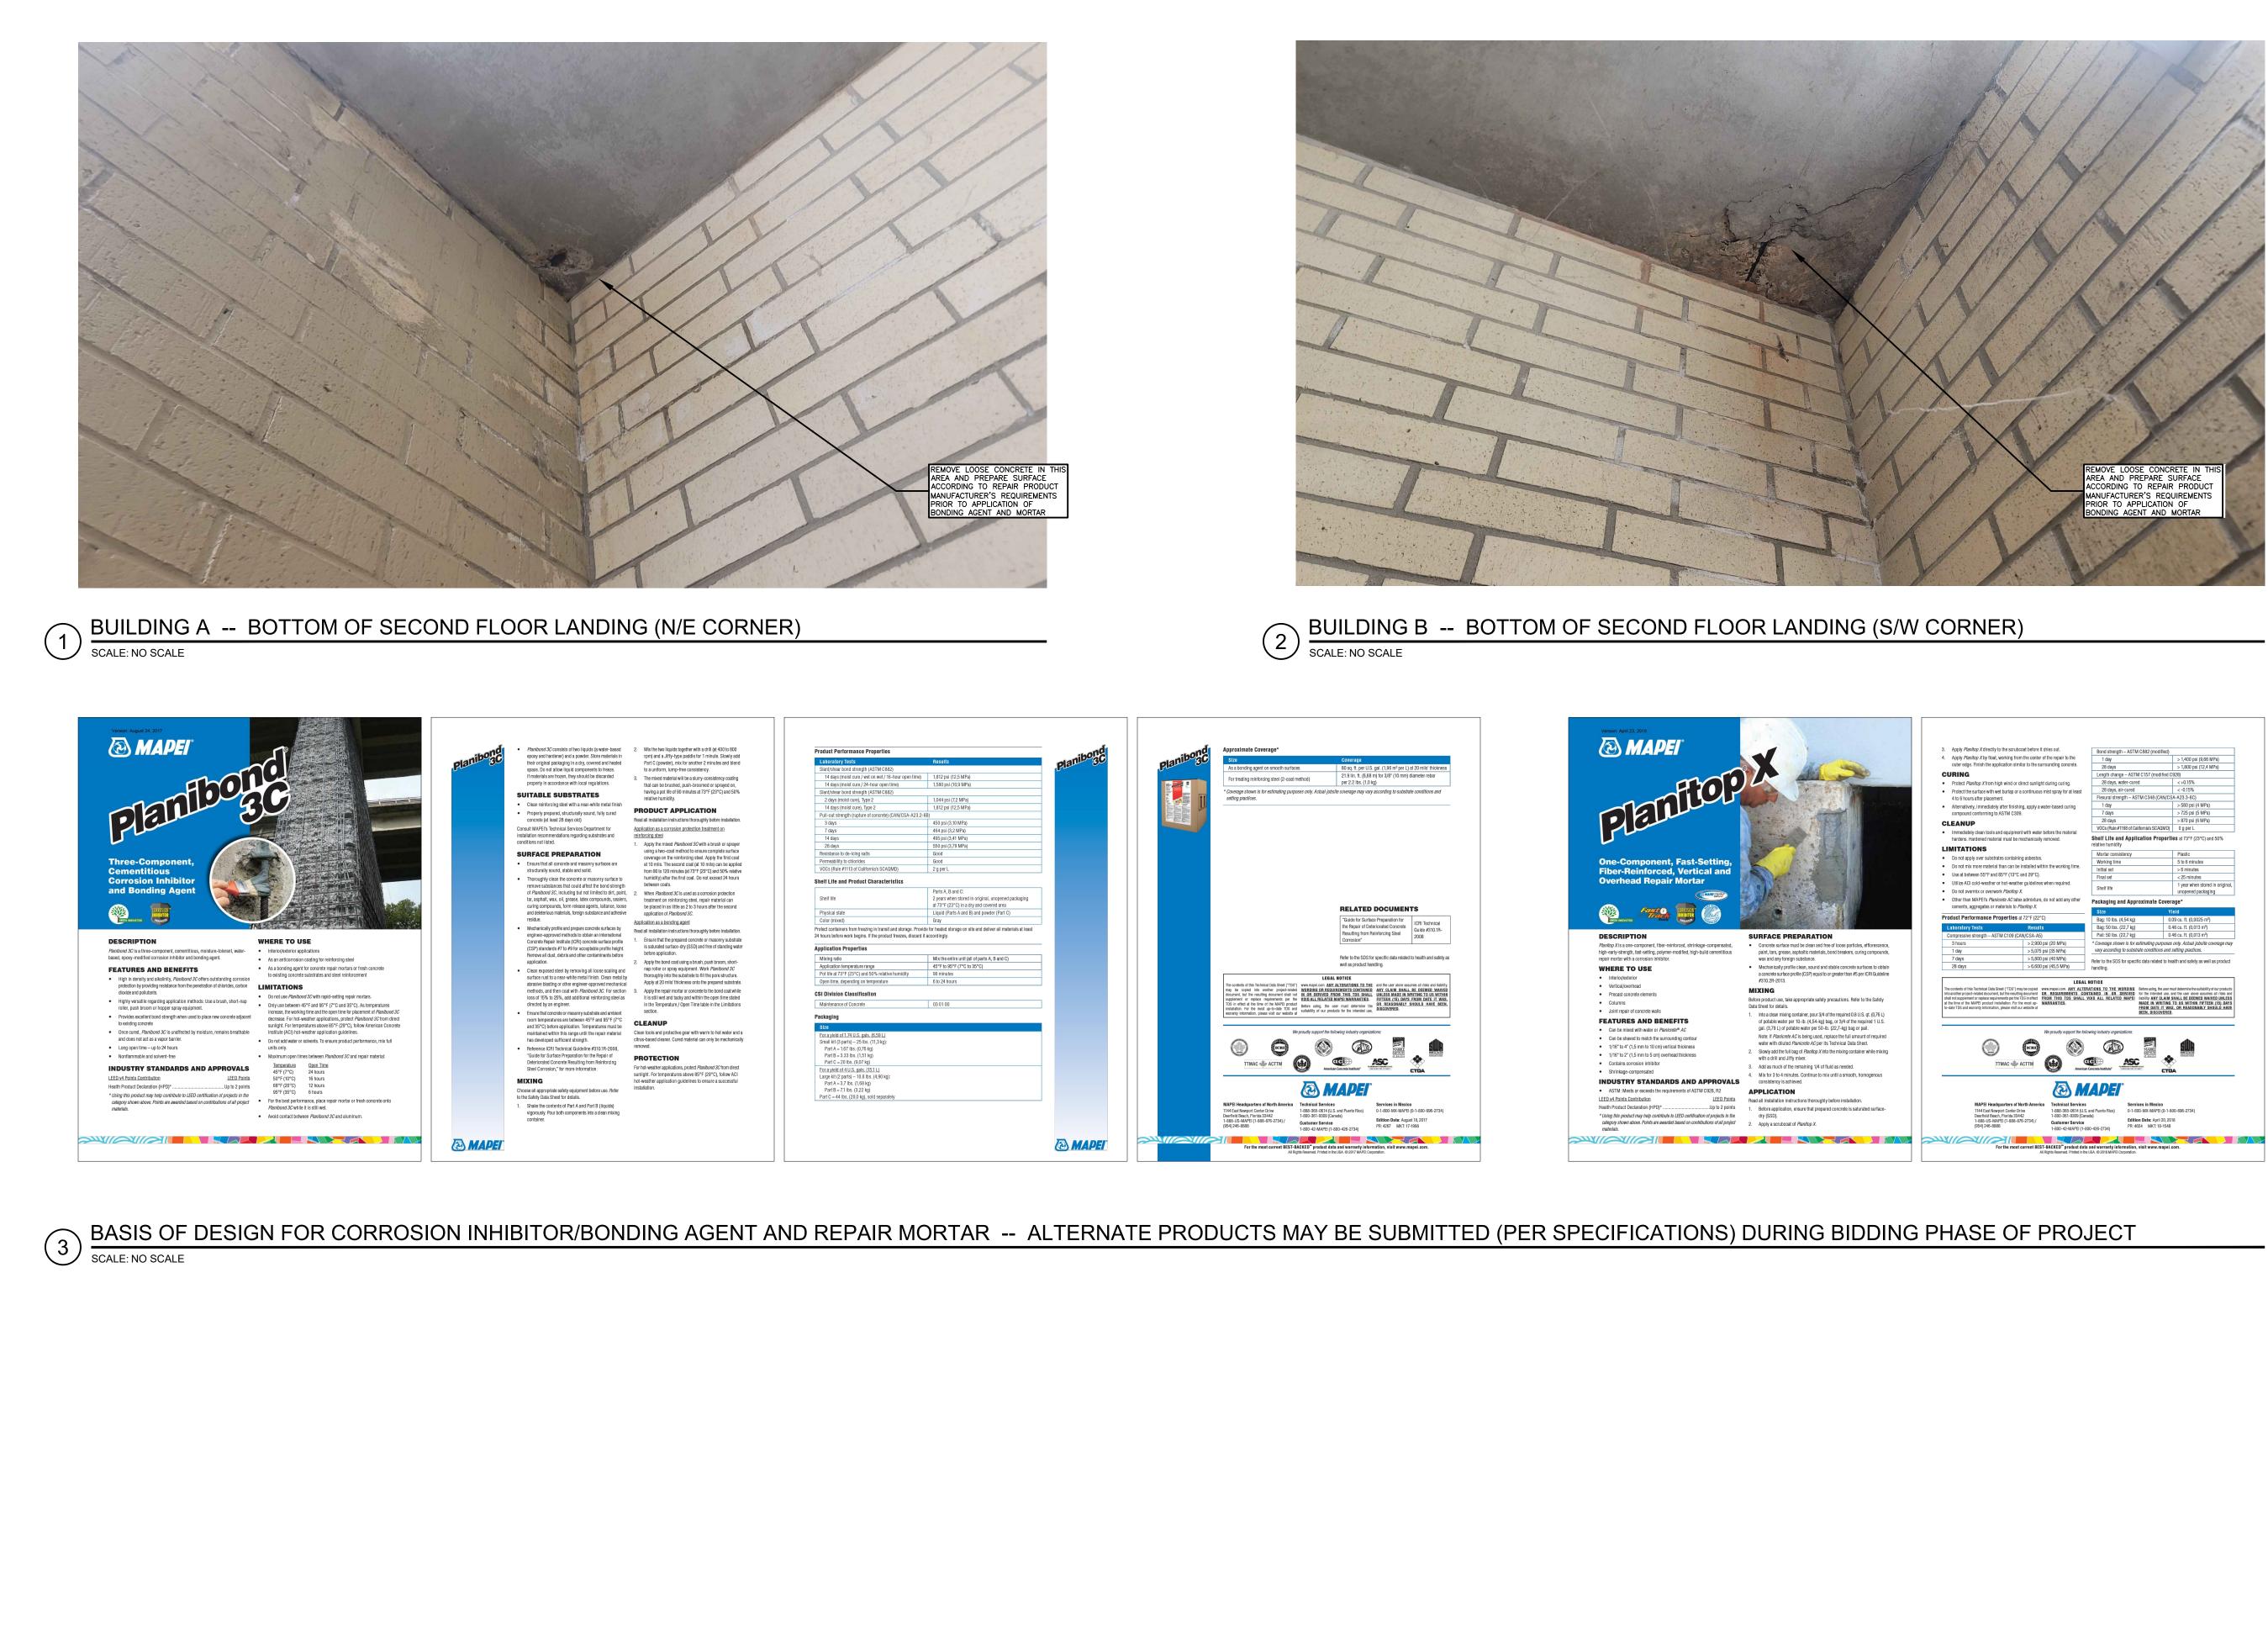


AΜ 10:21:29 7/1/2024




CIVIL & STRUCTURAL ENGINEERS

337 564 5918 5393 BIG LAKE ROAD WWW.DANDPENGINEERS.COM LAKE CHARLES LA 70605

RMG ARCHITECT RD 0 CHO(CHO) BOAF О S, LA ,06,07 CHO HIGH CHARLES, -01,03,04,05,0 ഗ CANE BE ARI Š ЩĠ 0 HURRI SAR LAK LAK HL-00 220 ЕU **m** S Σ 4 ALC 4 S © COPYRIGHT 2023, RANDY M. GOODLOE, A.I.A. APAC ALL INFORMATION, EITHER DRAWN, WRITTEN, OR IMPLIED APPEARING IN THIS DOCUMENT SHALL NOT BE DUPLICATED, DISCLOSED, OR OTHERWISE USED WITHOUT THE WRITTEN PERMISSION OF THE AUTHOR, RANDY M. GOODLOF AIA APAC. THIS DOCUMENT IS AN INSTRUMENT OF SERVICE AND IS THE SOLE PROPERTY OF THE AUTHOR. FURTHERMORE, THE USE OF THIS DOCUMENT FOR ANY PURPOSE SHALL BE REVOKED, IF THE INTENT OF THE DESIGN OR THE CONSTRUCTION TECHNIQUES OR DETAILS SHOWN HEREIN ARE NOT ADHERED TO OR THE CONTRACTUAL AGREEMENT GOVERNING THEIR USE ARE NOT STRICTLY ADHERED TO. RMG PROJECT NO. 20042-01-G OWNER PROJECT NO. HL-003-01,03,04,05,06,07 PROJECT MANAGER ΤМ DATE ISSUED 06.28.2024 REVISED manu SHEET NUMBER S-7 STAIR LANDING <u>CONCRETE REPAIRS</u>

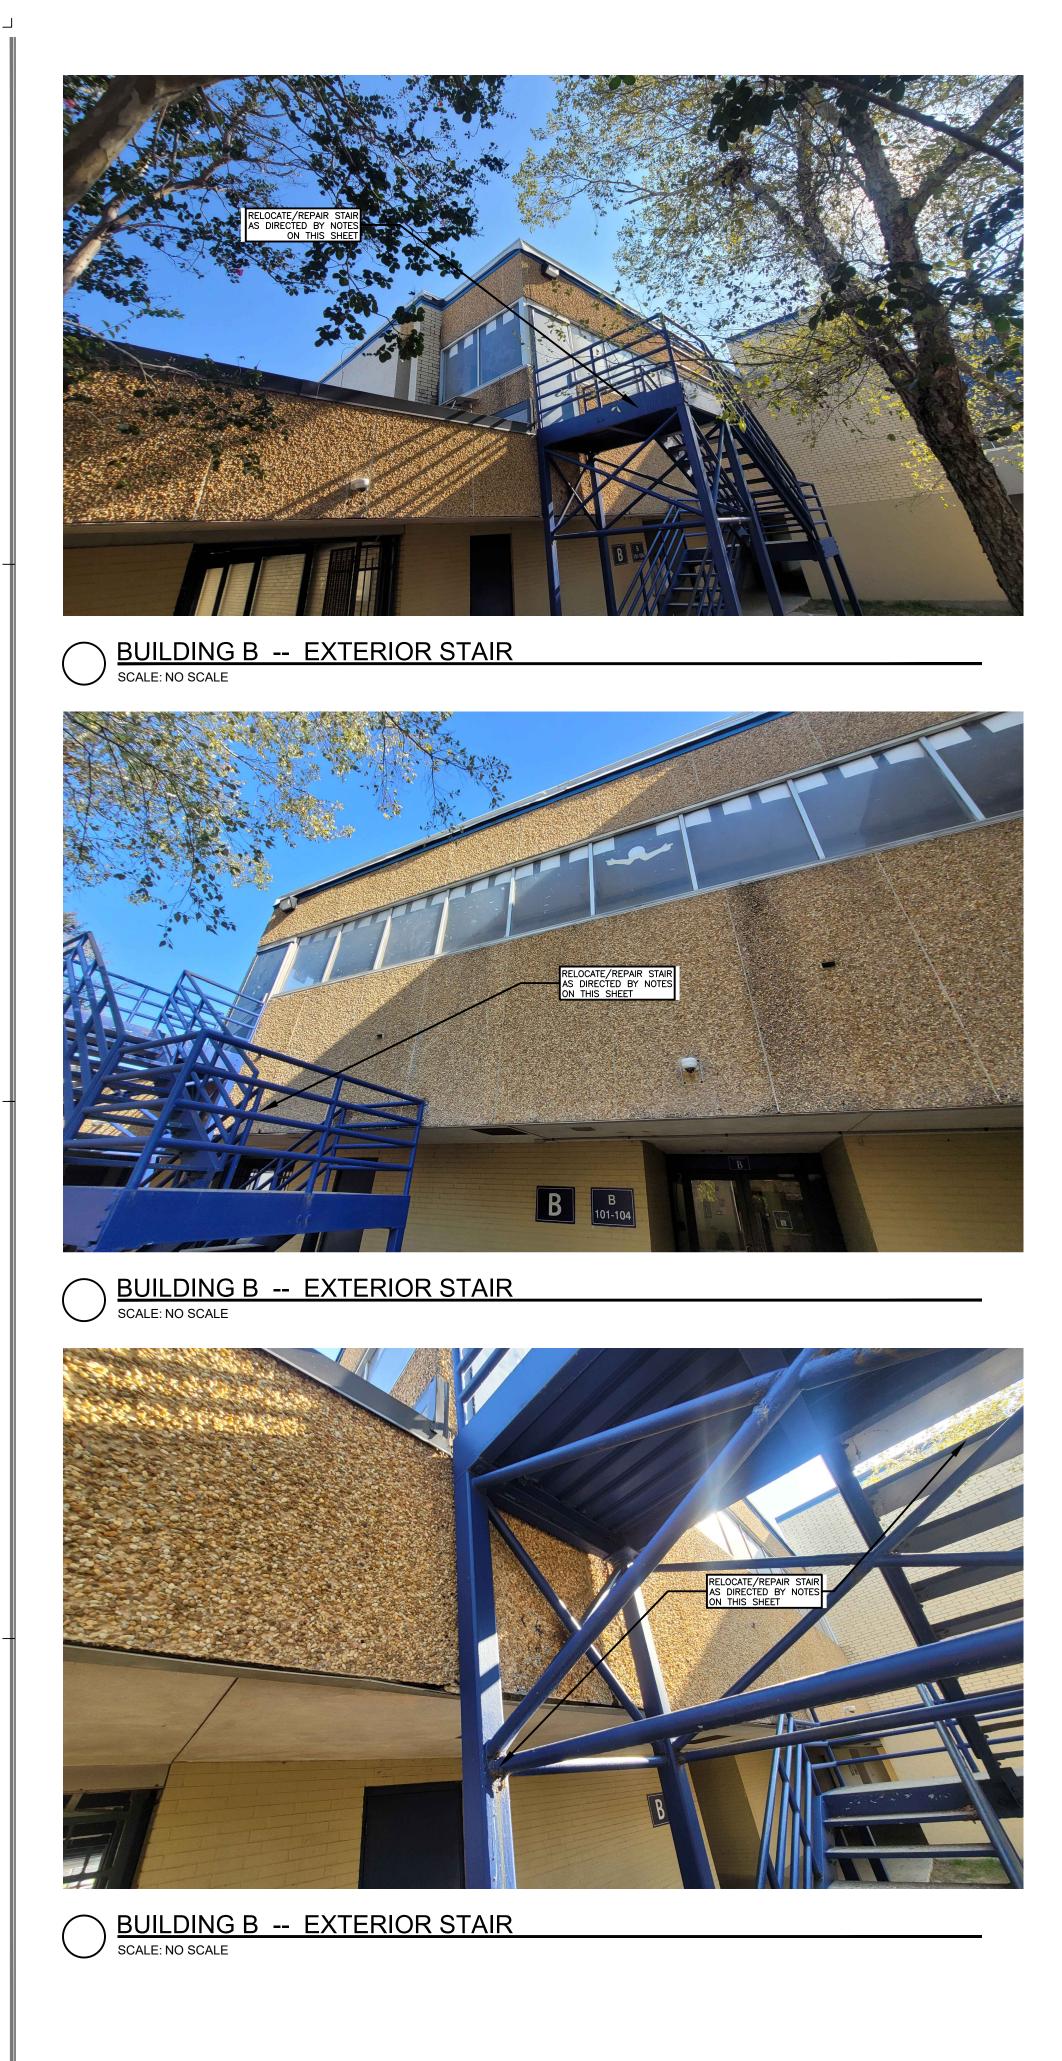

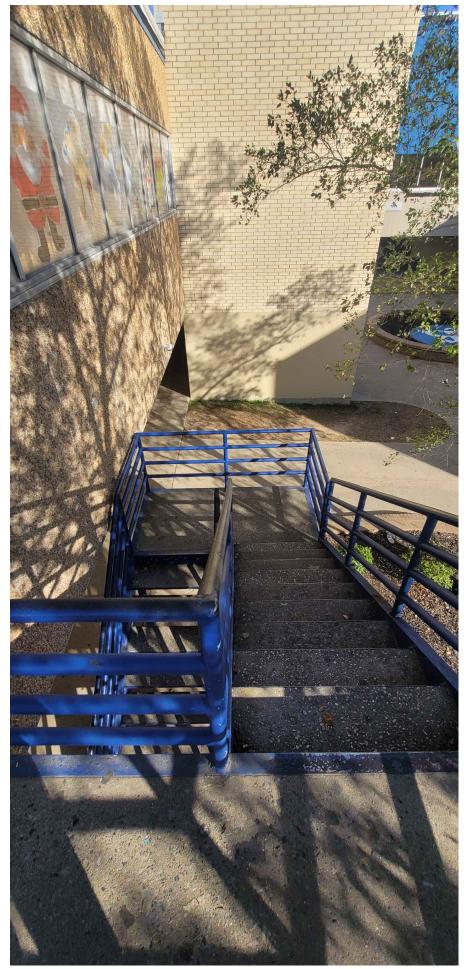


) BUILDING B -- EXTERIOR STAIR SCALE: NO SCALE



) BUILDING B -- EXTERIOR STAIR SCALE: NO SCALE







BUILDING B -- EXTERIOR STAIR SCALE: NO SCALE







	NO	TE:
	1.	CONTRACTOR TO DISCO FOR REINSTALLATION O
	2.	RELOCATE STAIR ASSEN COMPONENTS OF STAIR ASSEMBLY FROM DAMA
	3.	SANDBLAST ENTIRE ASS ENGINEER. CONTRACTO INSPECTION.
	4.	CONTRACTOR TO MAKE
	5.	IMMEDIATELY AFTER RE AS DIRECTED IN SPECI
(6.	REFER TO ARCHITECTU

BUILDING B -- EXTERIOR STAIR SCALE: NO SCALE

CONNECT STAIR ASSEMBLY FROM ANCHORAGE. PROTECT ANCHORAGE COMPONENTS FROM DAMAGE OF STAIR ASSEMBLY. EMBLY TO ALLOW REPAIR/REPLACEMENT OF EXTERIOR CLADDING SYSTEM AT BUILDING B. BOLTED AIR ASSEMBLY MAY BE UNBOLTED TO FACILLITATE RELOCATION. CONTRACTOR TO PROTECT STAIR MAGE AS THE ASSEMBLY WILL BE REINSTALLED AFTER RELOCATION/REPAIRS ARE COMPLETED.

SSEMBLY TO "WHITE METAL" CONDITION (SSPC-SP5/NACE 1) FOR INSPECTION BY STRUCTURAL TOR TO PROVIDE A MINIMUM NOTICE PERIOD OF (TWO) BUSINESS DAYS PRIOR TO READINESS FOR


E REPAIRS TO STAIR ASSEMBLY AS DIRECTED, IN WRITING, BY STRUCTURAL ENGINEER. EPAIRS HAVE BEEN MADE, CONTRACTOR IS TO APPLY A PRIMER COMPATIBLE WITH TOP COAT(S) CIFICATIONS. JRAL DRAWINGS AND SPECIFICATIONS FOR ADDITIONAL COATING REQUIREMENTS.




CIVIL & STRUCTURAL ENGINEERS

337 564 5918 WWW.DANDPENGINEERS.COM

5393 BIG LAKE ROAD LAKE CHARLES LA 70605

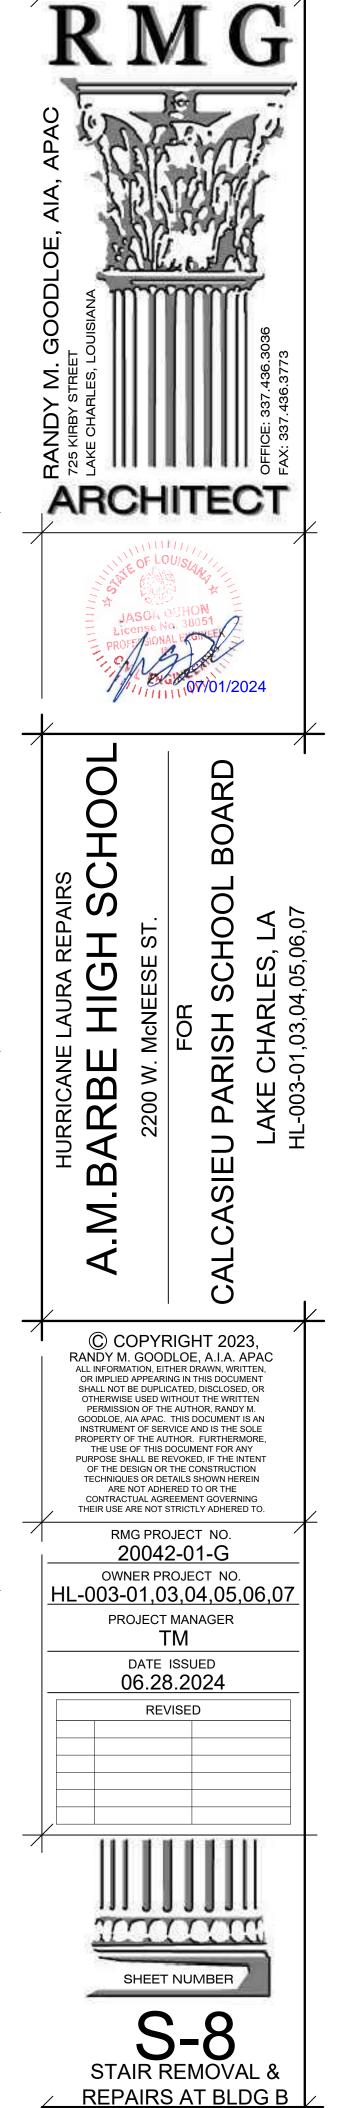

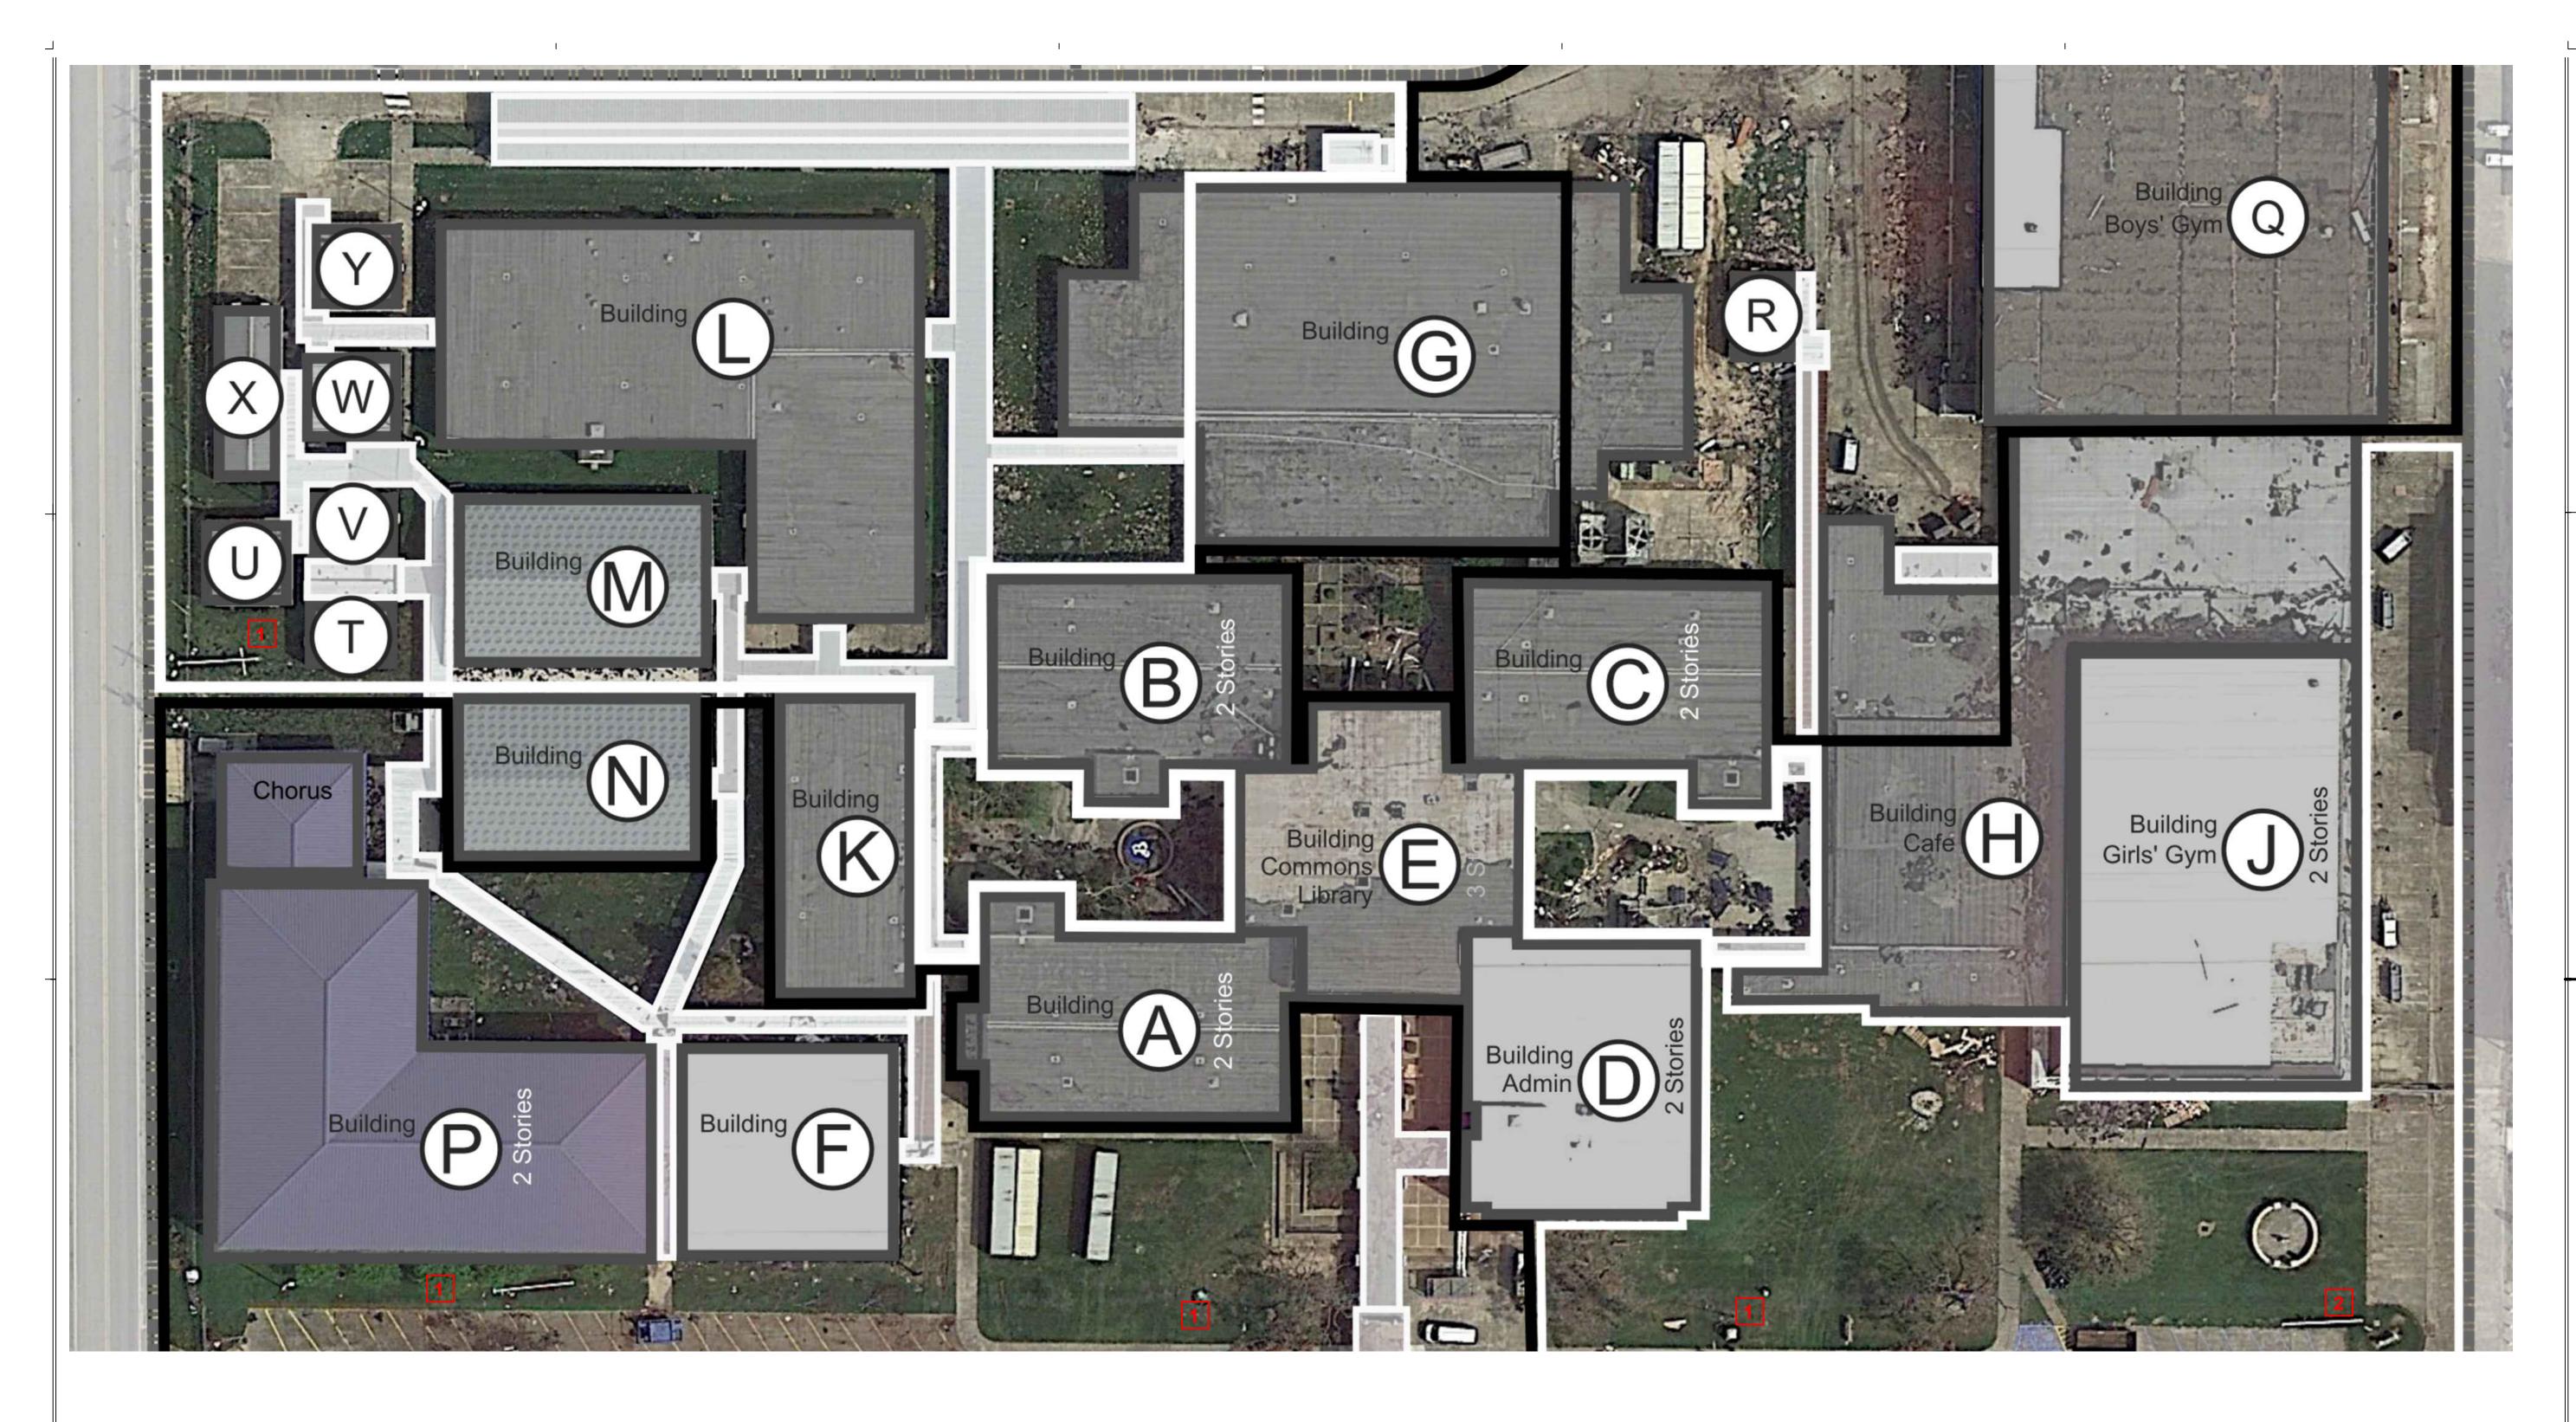


1 Zone 1 - Electrical Site Plan N.T.S.

GENERAL NOTES:


- A. CONTRACTOR SHALL FIELD VERIFY EXISTING LIGHTING MOUNTING LOCATIONS IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR TO ORDERING LIGHT FIXTURES.
- C. THE INTENT OF THE PLAN IS FOR EXISTING CIRCUITING TO REMAIN AND EACH EXISTING LIGHT POLE TO BE REPLACED WITH THE NEW FIXTURE TYPE SPECIFIED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF THE 2020 EDITION OF THE NEC.
- F. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.

KEYNOTES:

- 1. CONTRACTOR SHALL DISCONNECT AND REMOVE EXISTING LIGHT POLE AND FOUNDATION. PROTECT EXISTING CIRCUIT WIRING FOR RE-USE. PROVIDE NEW POLE FIXTURE TYPE 'P' AND NEW POLE FOUNDATION. FIXTURE TYPE P SHALL BE MCGRAW-EDISON OR EQUAL GLEON-SA4C-740-U-T4W-WH WITH A 25 FT SQUARE STRAIGHT STEEL POLE MCGRAW-EDISON OR EQUAL SSS-6-A-25-S-W-N-1. SWITCH THROUGH EXISTING PHOTOCELL. IF PHOTOCELL IS MISSING OR NOT WORKING PROVIDE NEW UNIT. SEE POLE FOUNDATION DETAIL THIS SHEET.
- CONTRACTOR SHALL DISCONNECT AND REMOVE EXISTING LIGHT POLE AND FOUNDATION. PROTECT EXISTING CIRCUIT WIRING FOR RE-USE. PROVIDE NEW POLE FIXTURE TYPE 'Q' AND NEW POLE FOUNDATION. FIXTURE TYPE Q SHALL BE MCGRAW-EDISON OR EQUAL GLEON-SA4C-740-U-T4W-WH- MA1194-QA WITH A 25 FT SQUARE STRAIGHT STEEL POLE MCGRAW-EDISON OR EQUAL SSS-6-A-25-S-W-3-5. SWITCH THROUGH EXISTING PHOTOCELL. IF PHOTOCELL IS MISSING OR NOT WORKING PROVIDE NEW UNIT. SEE POLE FOUNDATION DETAIL THIS SHEET.



1

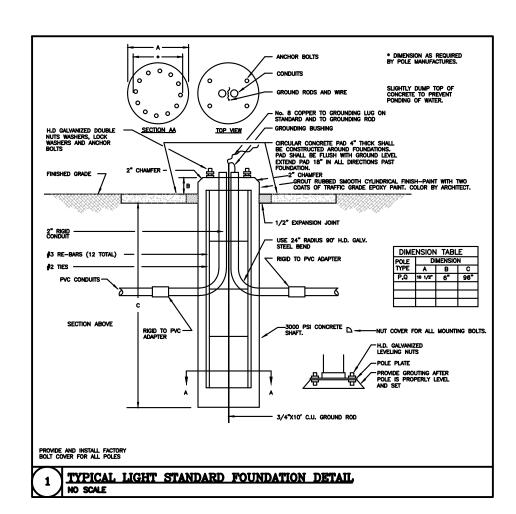

1

NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS


NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.

THE ELECTRICAL SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE ELECTRICAL SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE). THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING THE EXISTING ELECTRICAL SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS.



ASSOCIATED DESIGN GROUP, INC. Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

Project No. 20300

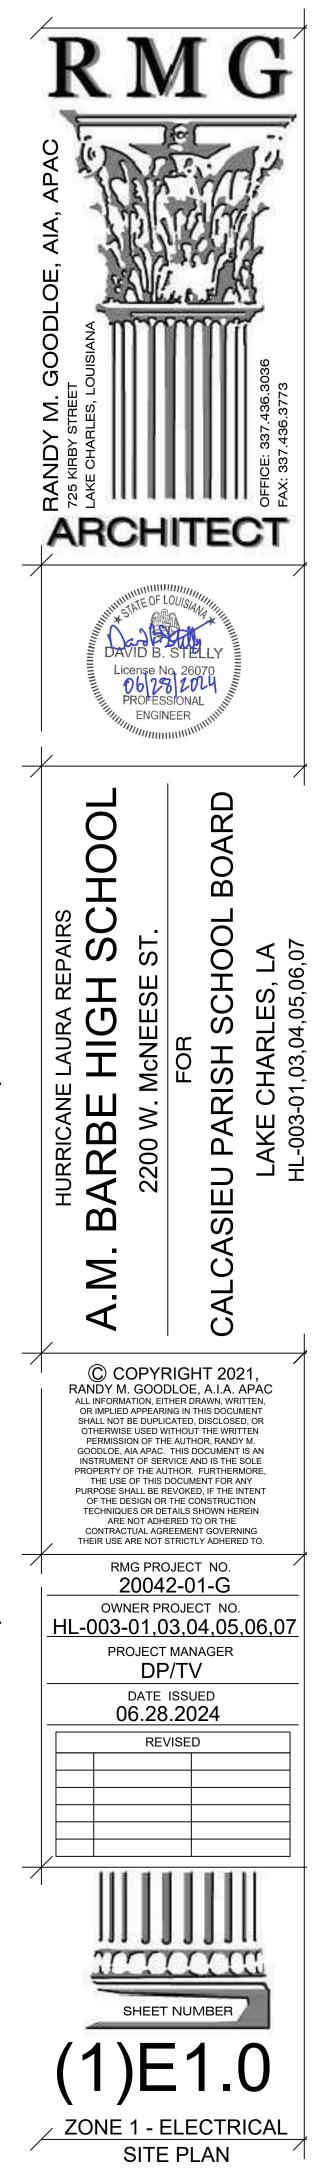


T

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING ELECTRICAL EQUIPMENT SIZES IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR ORDERING NEW EQUIPMENT.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.


1



1. CONTRACTOR SHALL REMOVE EXISTING ROOF MOUNTED HOOD/FAN AND AND INSTALL ON NEW CURB. RECONNECT EXISTING ELECTRICAL AFTER ROOF WORK IS COMPLETE.

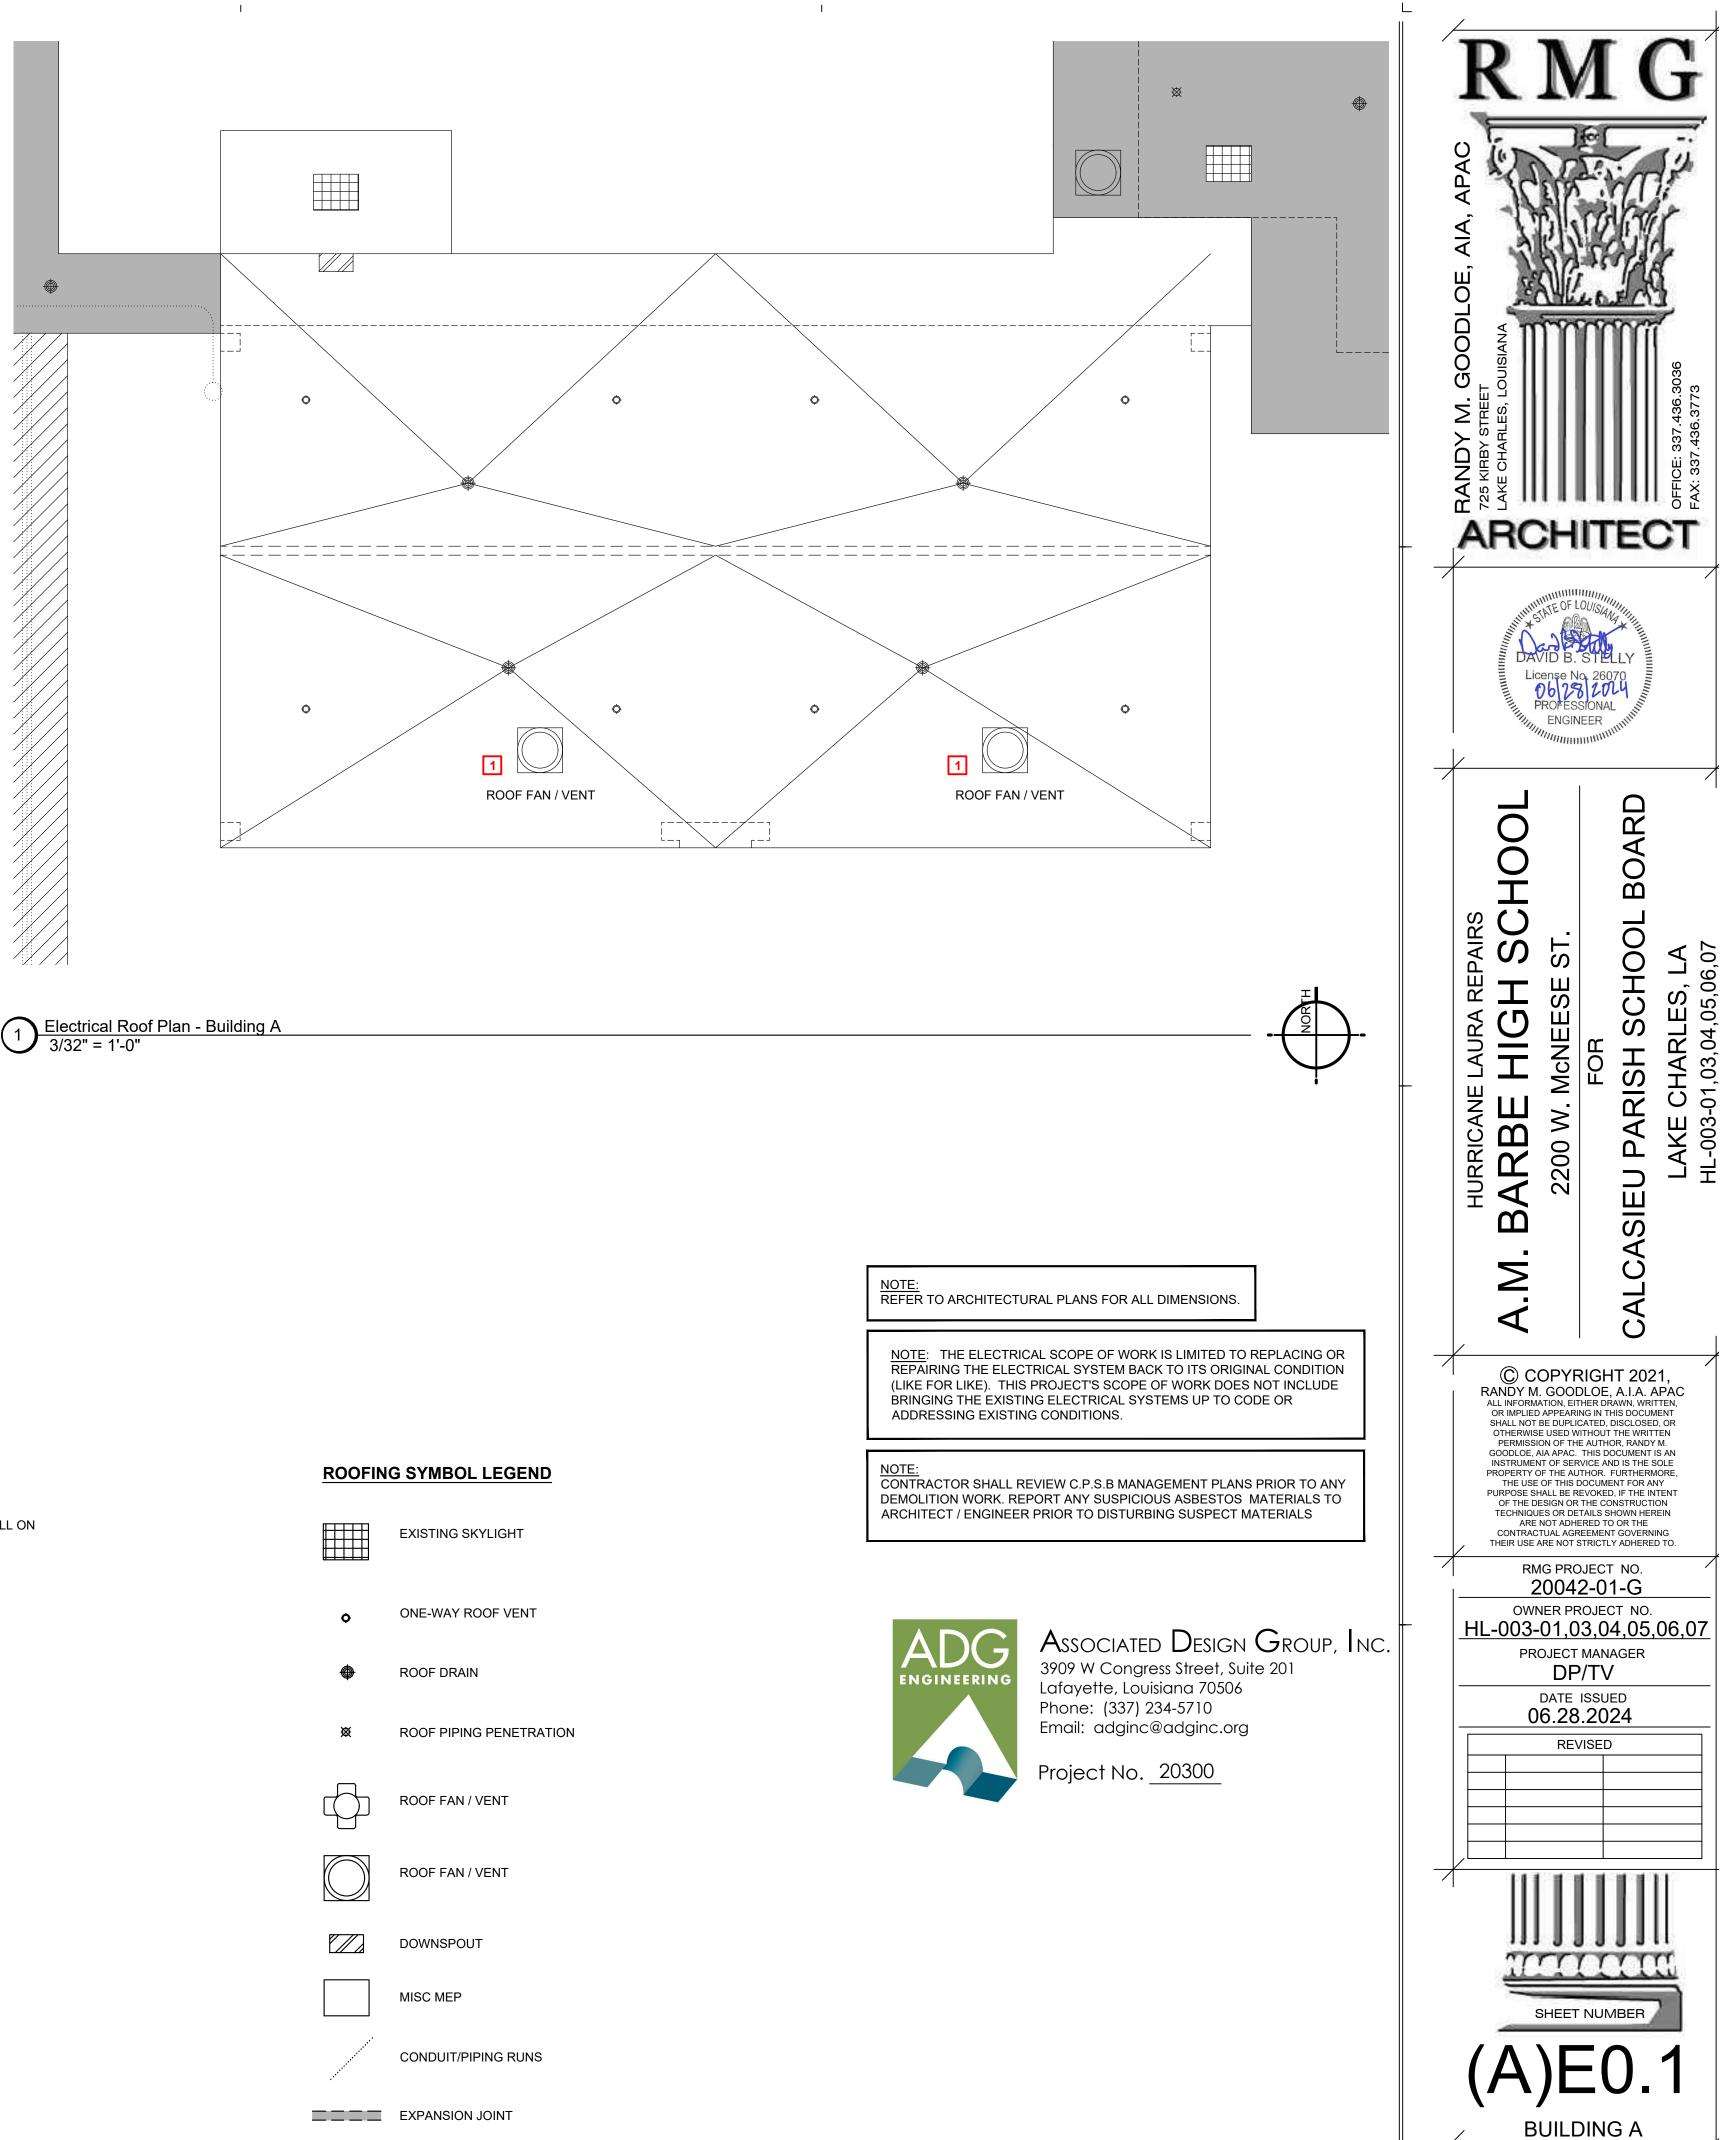

I



KEYNOTES TO SHEET:


I.

I.

EXISTING SKYLIGHT
ONE-WAY ROOF VENT
ROOF DRAIN
ROOF PIPING PENETRATION
ROOF FAN / VENT
ROOF FAN / VENT
DOWNSPOUT
MISC MEP
CONDUIT/PIPING RUNS

I.

ROOF PLAN

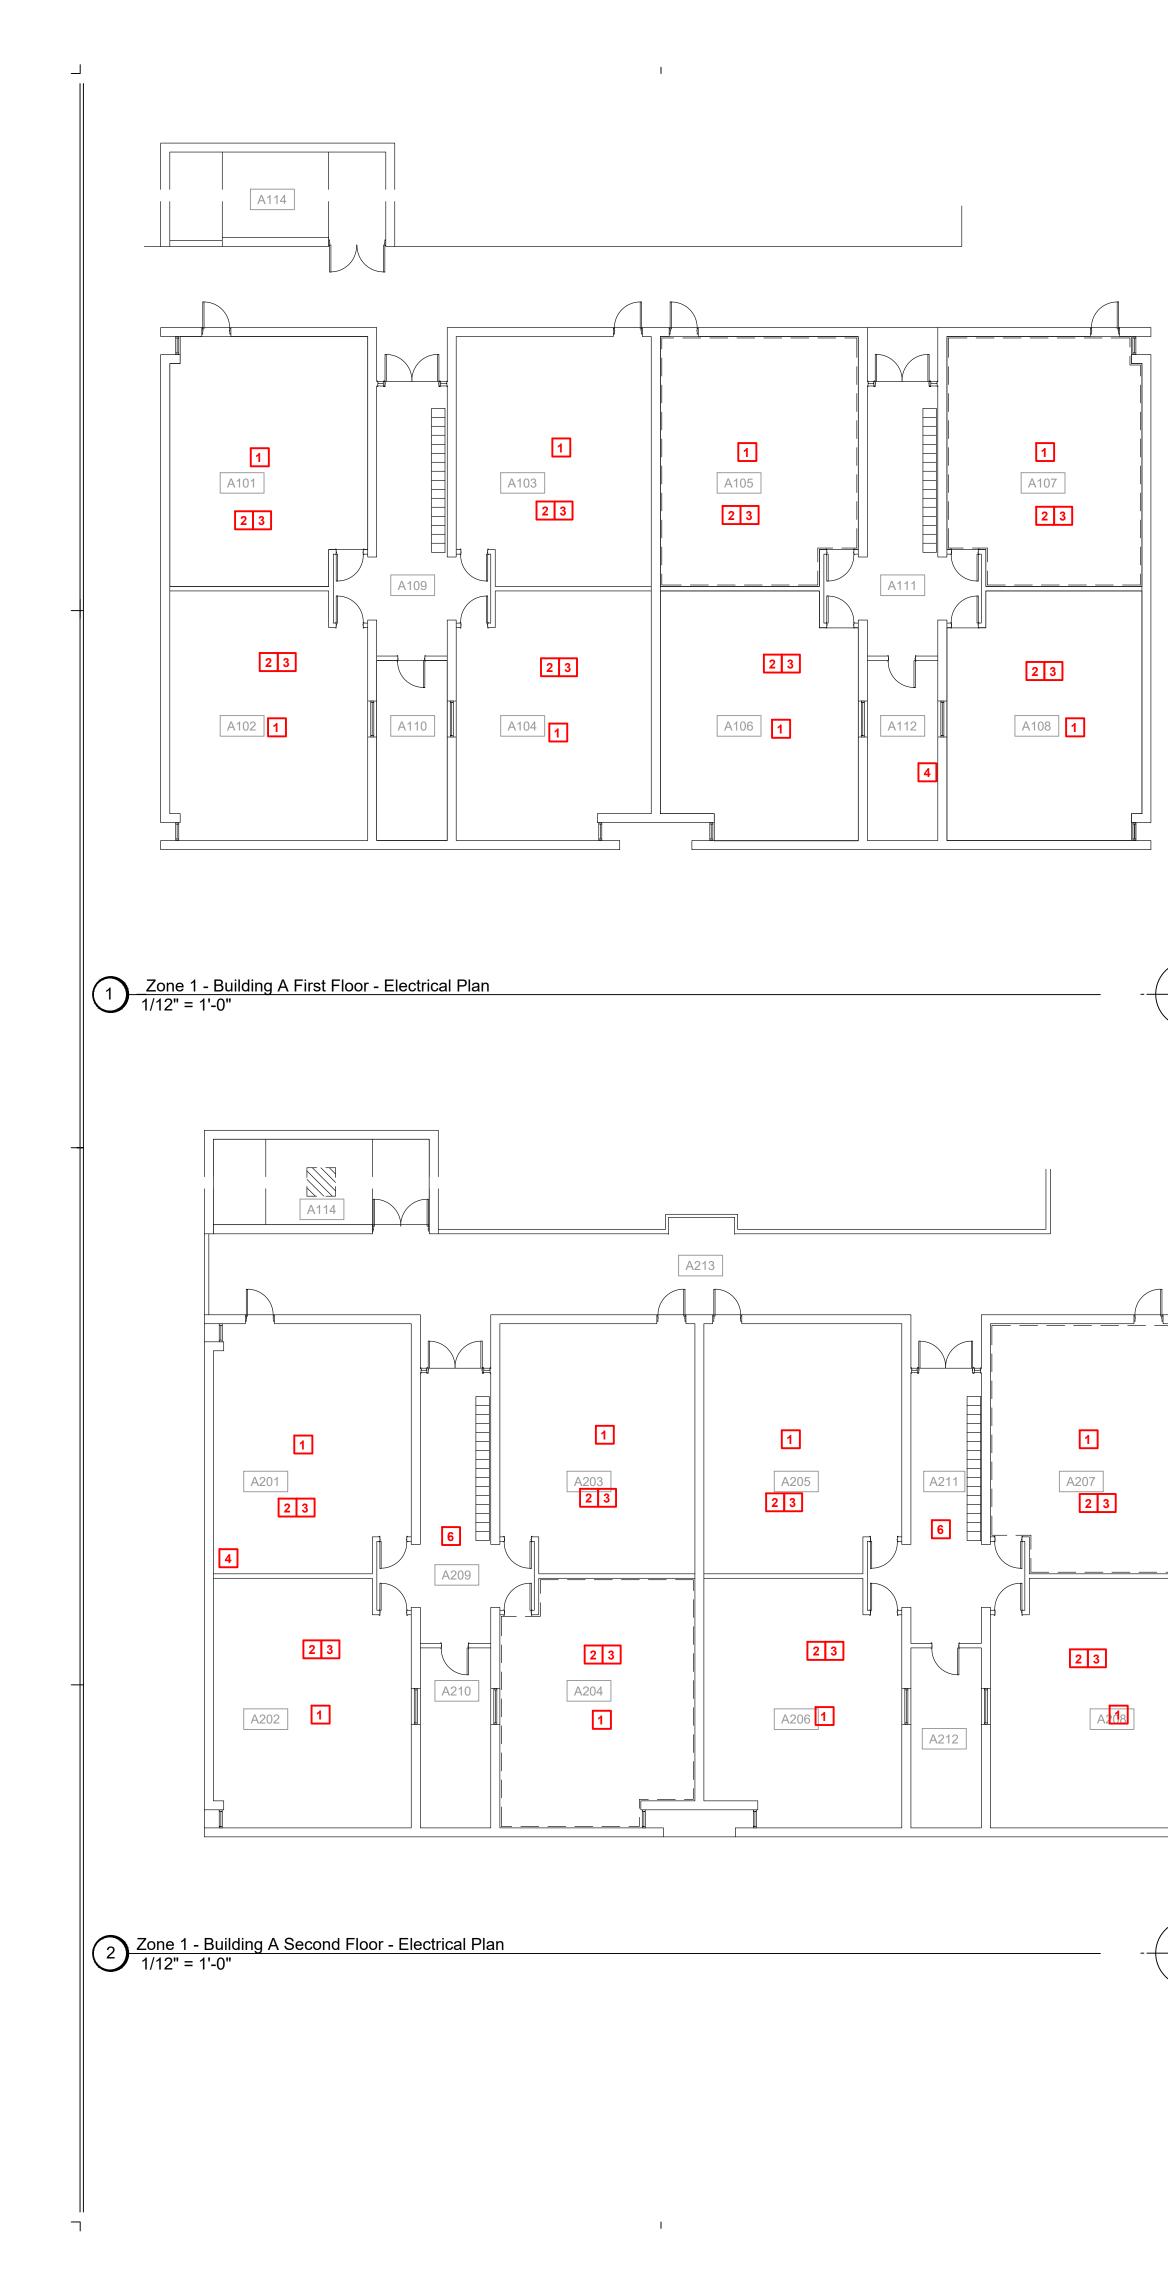

1

1

- A. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR TO ORDERING LIGHT FIXTURES.
- B. THE INTENT OF THE PLAN IS FOR EXISTING CIRCUITING TO REMAIN AND BE RE-USED. ALL EXISTING POWER WIRING SHALL BE PROTECTED DURING DEMOLITON AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- D. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF THE 2020 EDITION OF NEC.
- E. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.
- F. EXISTING LIGHTING THROUGHOUT THE BUIDING HAS BEEN REPLACED BY THE OWNER IN A PREVIOUS PROJECT. IF THERE ARE SPACES WHERE THE DRAWINGS REQUIRE CEILING REPLACEMENT, THE CONTRACTOR WILL BE REQUIRED TO REMOVE THE EXISTING FIXTURES, PROPERLY STORE THEM ONSITE (CONTAINER OR OTHER OWNER APPROVED AREA), THEN RE-INSTALL FOLLOWING REPLACEMENT OF CEILINGS WITHIN A GIVEN SPACE.
- G. ALL EXISTING LOW VOLTAGE WIRING SHALL BE PROTECTED DURING DEMOLITION AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.

1



KEYNOTES:

1

1. ANY EXISTING CAMERAS OR WIRELESS ACCESS POINTS TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH CPSB IT DEPARTMENT. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED COMMUNICATIONS CABLING.

2. ANY EXISTING FIRE ALARM DEVICES TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH SYLVAN SOUND. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED FIRE ALARM WIRING.

3. ANY EXISTING INTERCOM DEVICES TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH SYLVAN SOUND. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED INTERCOM WIRING.

4. EXISTING LOCATION OF IT RACK. CONTRACTOR IS RESPONSIBLE FOR PROTECTING IT RACK, EQUIPMENT, AND WIRING DURING CONSTRUCTION. IT RACK SHALL REMAIN OPERATIONAL THROUGHOUT CONSTRUCTION UNLESS APPROVED BY CPSB IT FOR IT TO BE POWERED DOWN. PROVIDE COVER FOR RACK TO MINIMIZE DUST AND DEBRIS WHILE AT THE SAME TIME ALLOWING COOLING AND PROPER AIRFLOW.

> NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS


NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.


NOTE: THE ELECTRICAL SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE ELECTRICAL SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE). THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING THE EXISTING ELECTRICAL SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS.



Associated Design Group, Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

Project No. 20300

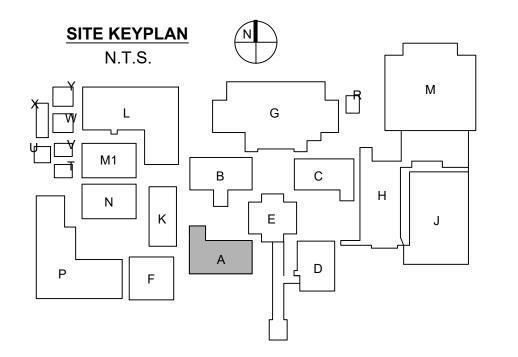


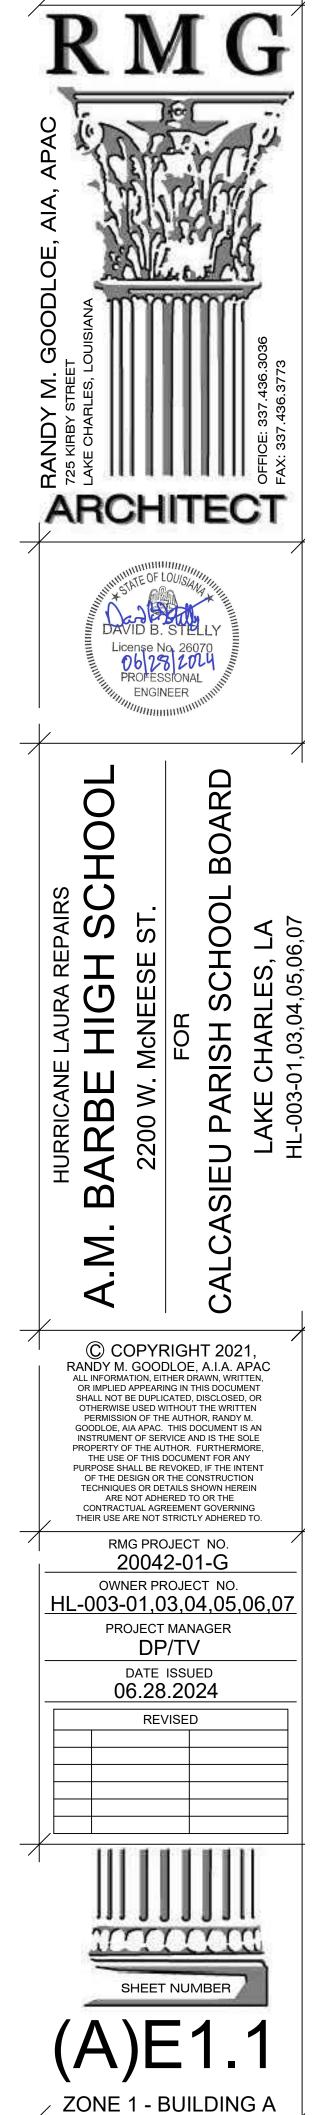

1

I.

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

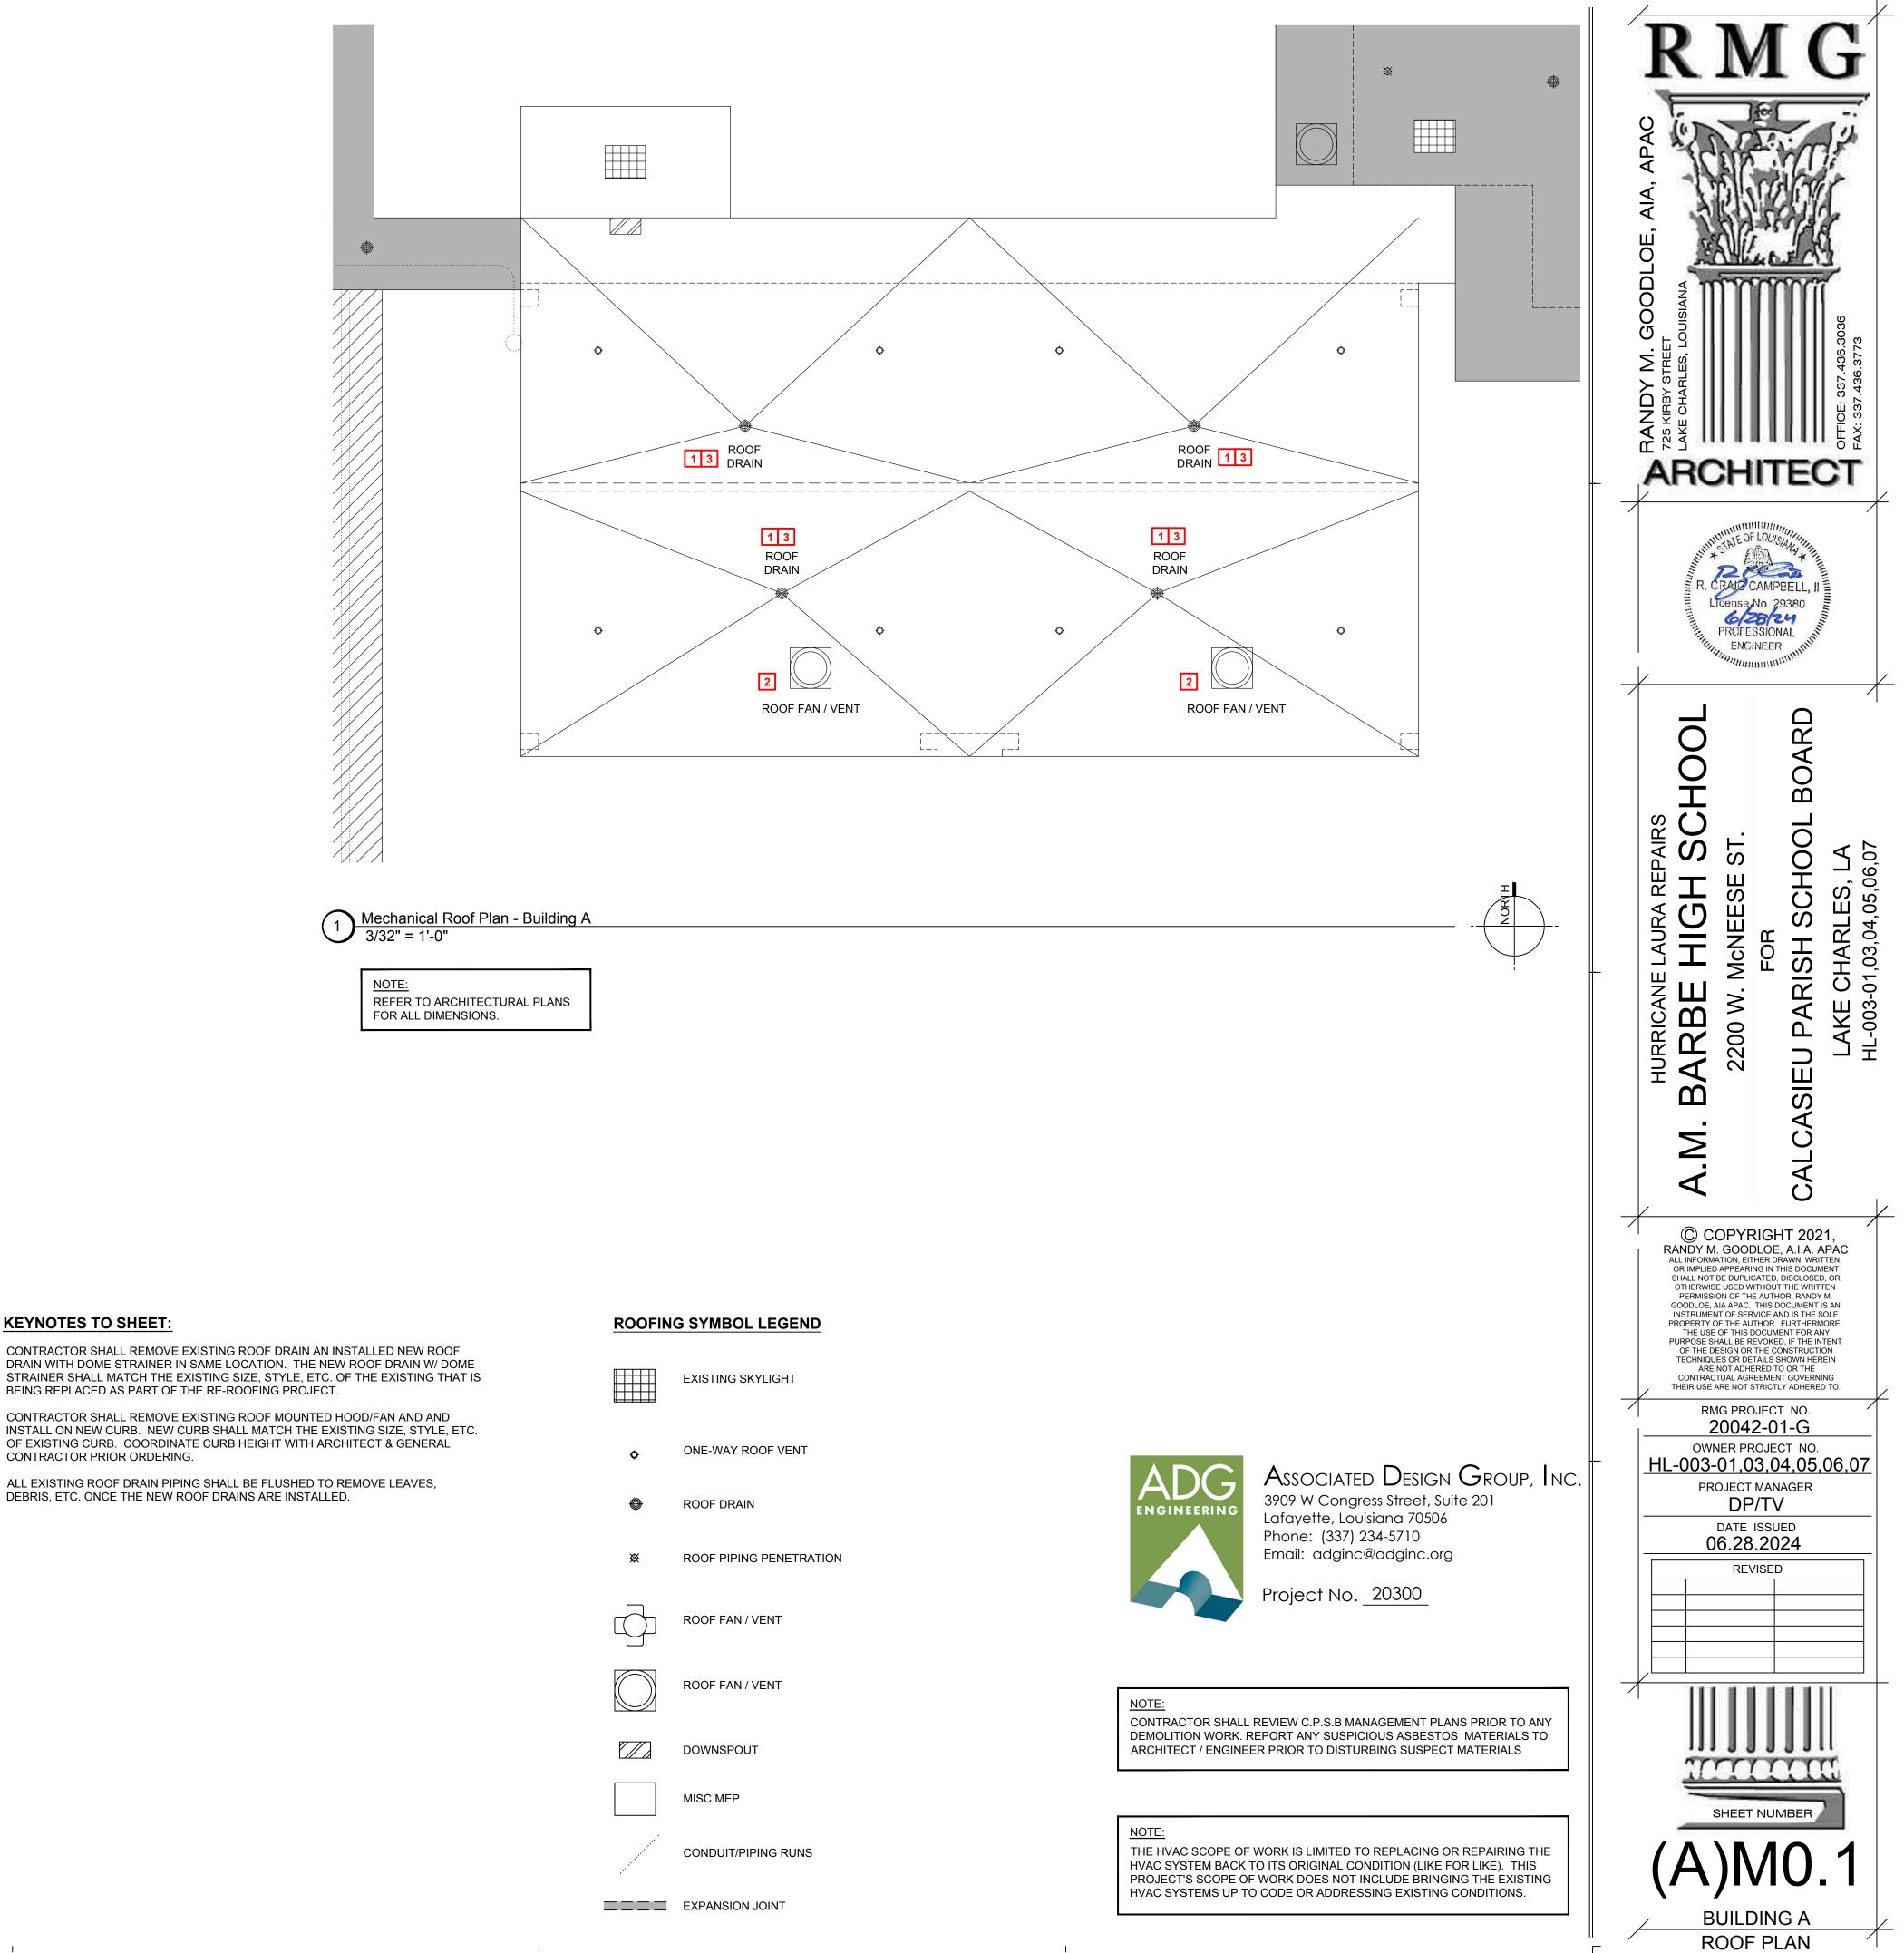

I


KEYNOTES TO SHEET:

1

I

- 1. CONTRACTOR SHALL REMOVE EXISTING ROOF DRAIN AN INSTALLED NEW ROOF DRAIN WITH DOME STRAINER IN SAME LOCATION. THE NEW ROOF DRAIN W/ DOME STRAINER SHALL MATCH THE EXISTING SIZE, STYLE, ETC. OF THE EXISTING THAT IS BEING REPLACED AS PART OF THE RE-ROOFING PROJECT. 2. CONTRACTOR SHALL REMOVE EXISTING ROOF MOUNTED HOOD/FAN AND AND INSTALL ON NEW CURB. NEW CURB SHALL MATCH THE EXISTING SIZE, STYLE, ETC.
 - OF EXISTING CURB. COORDINATE CURB HEIGHT WITH ARCHITECT & GENERAL CONTRACTOR PRIOR ORDERING. 3. ALL EXISTING ROOF DRAIN PIPING SHALL BE FLUSHED TO REMOVE LEAVES,

	EXISTING SKYLIGHT
•	ONE-WAY ROOF VENT
۲	ROOF DRAIN
※	ROOF PIPING PENETRATION
	ROOF FAN / VENT
\bigcirc	ROOF FAN / VENT
	DOWNSPOUT
	MISC MEP
	CONDUIT/PIPING RUNS

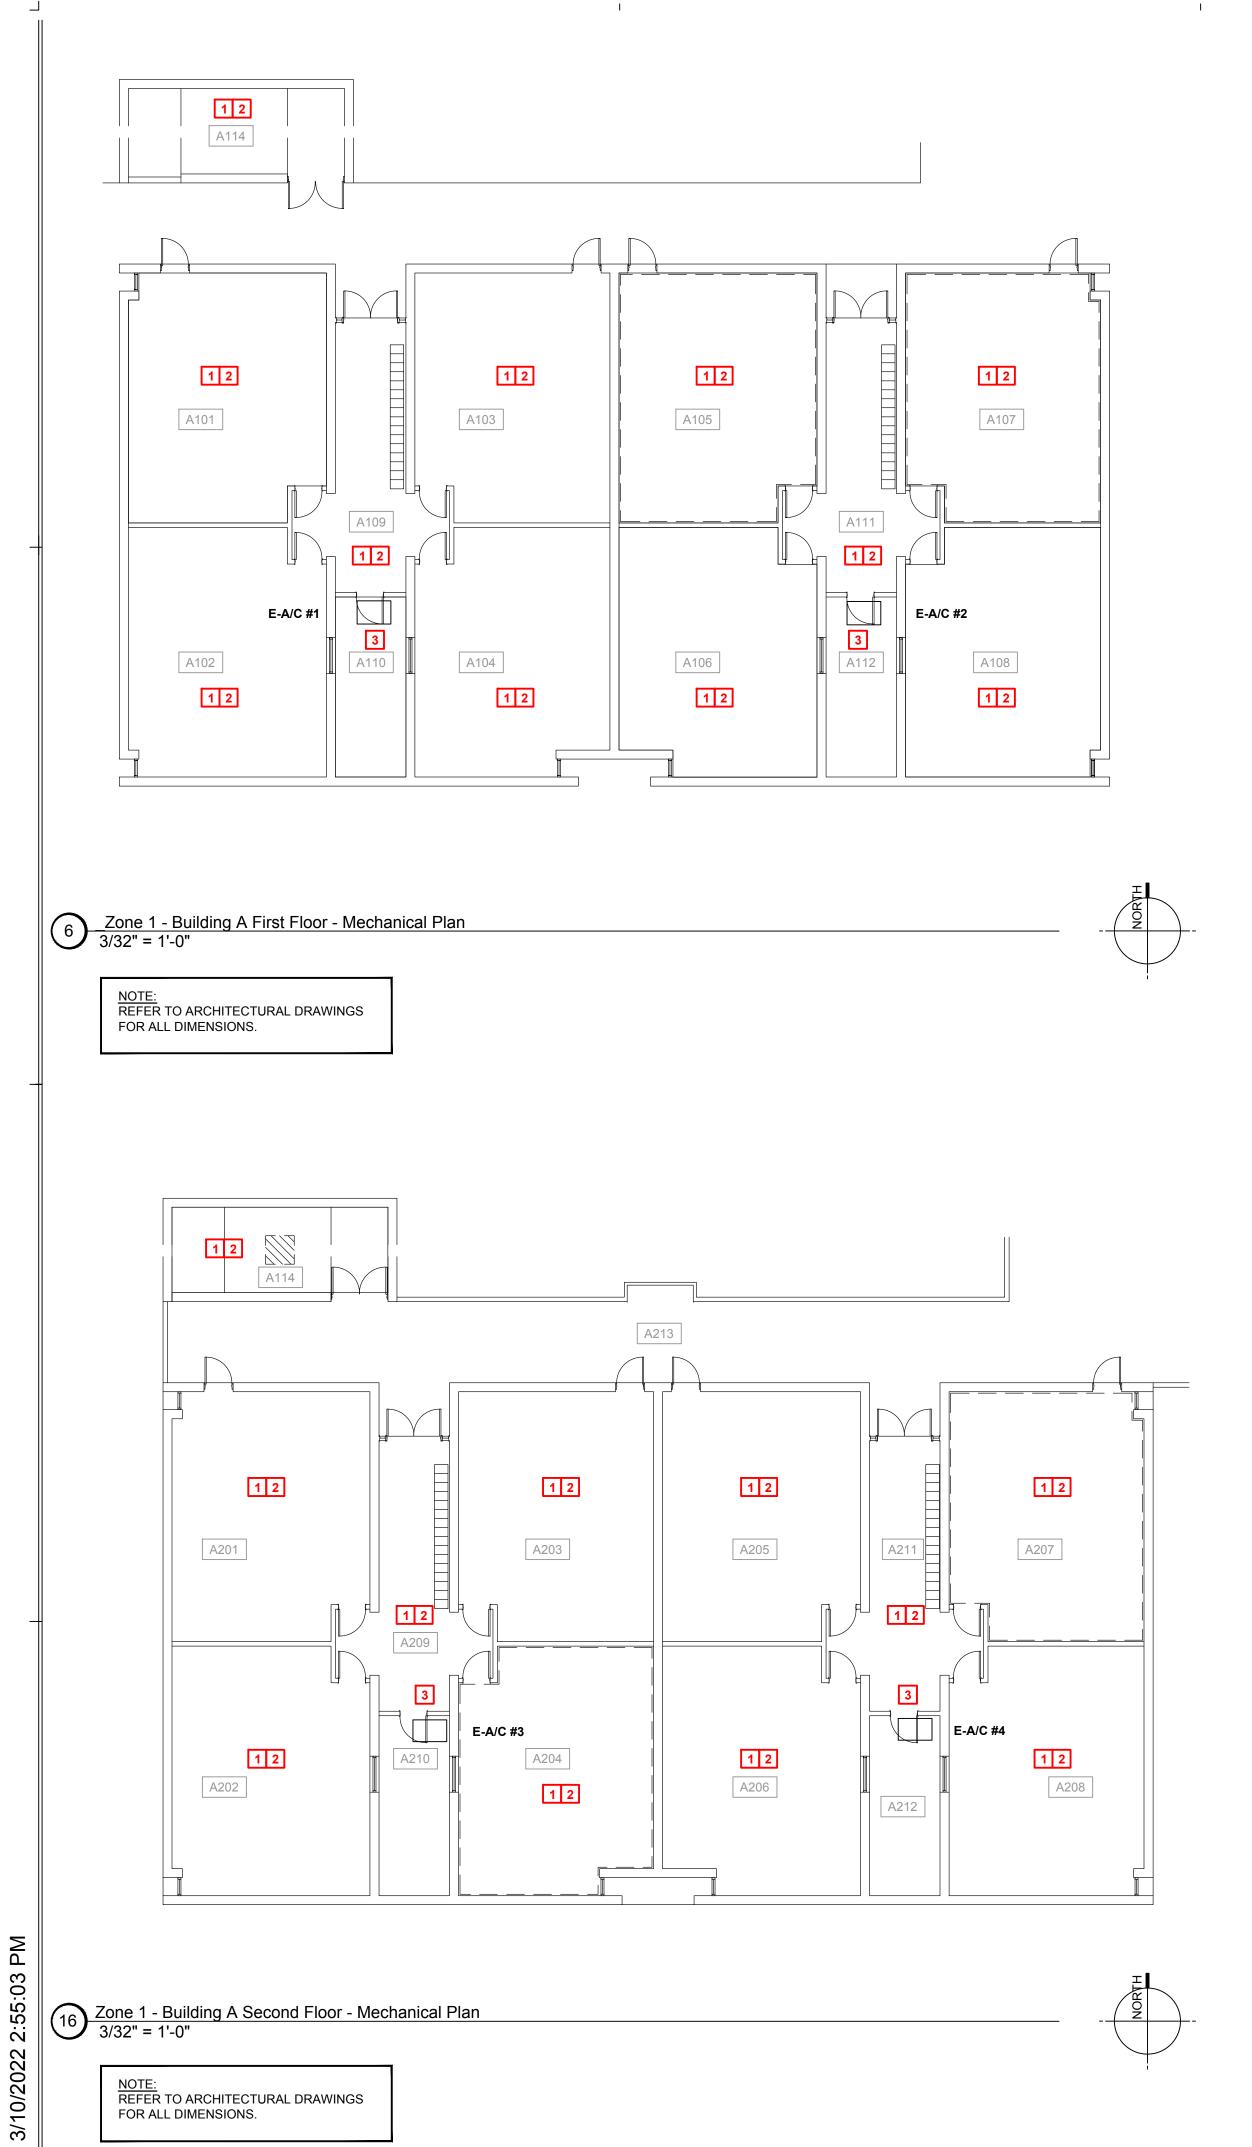

1

GENERAL NOTES:

1

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

KEYNOTES TO SHEET:

- 1. NO INTERIOR MECHANICAL (PLUMBING & HVAC) WORK ASSOCIATED WITH THESE SPACES WITHIN THE BUILDING.
- 2. CONTRACTOR SHALL TEMPORARILY SUPPORT AND PROTECT ANY EQUIPMENT, DIFFUSERS, GRILLES, ETC. IN OR ABOVE CEILINGS OF THESE SPACES DURING THE REMOVAL AND INSTALLATION OF NEW CEILINGS. REFER TO ARCHITECTURAL PLANS FOR THOSE LOCATIONS.
- 3. EXISTING FAN COIL UNIT TO REMAIN AND CLEANED PER THE SPECIFICATIONS. REMOVE AND REPLACE EXISTING AIR HANDLING UNIT INTERIOR LINER AND CLEAN INTERIOR OF UNIT INCLUDING COILS.

NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS

NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.


<u>NOTE:</u> THE HVAC SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE HVAC SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE) IN MOST CIRCUMSTANCES. THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING ALL THE EXISTING HVAC SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS. ALTHOUGH ALL WORK MUST COMPLY WITH FEMA CONSENSUS-BASED, "LATEST PUBLISHED EDITIONS" OF CODES NOT NECESSARILY THOSE CODES ADOPTED BY THE LOCAL MUNICIPALITY.




1

Associated Design Group, Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

Project No. 20300

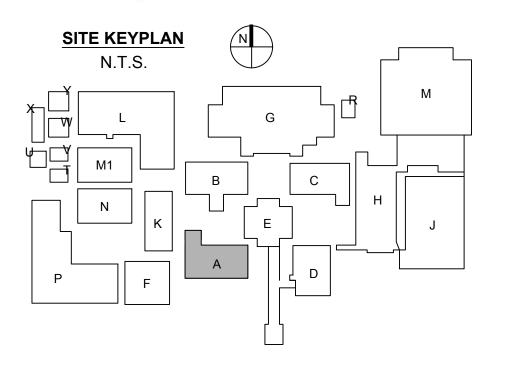


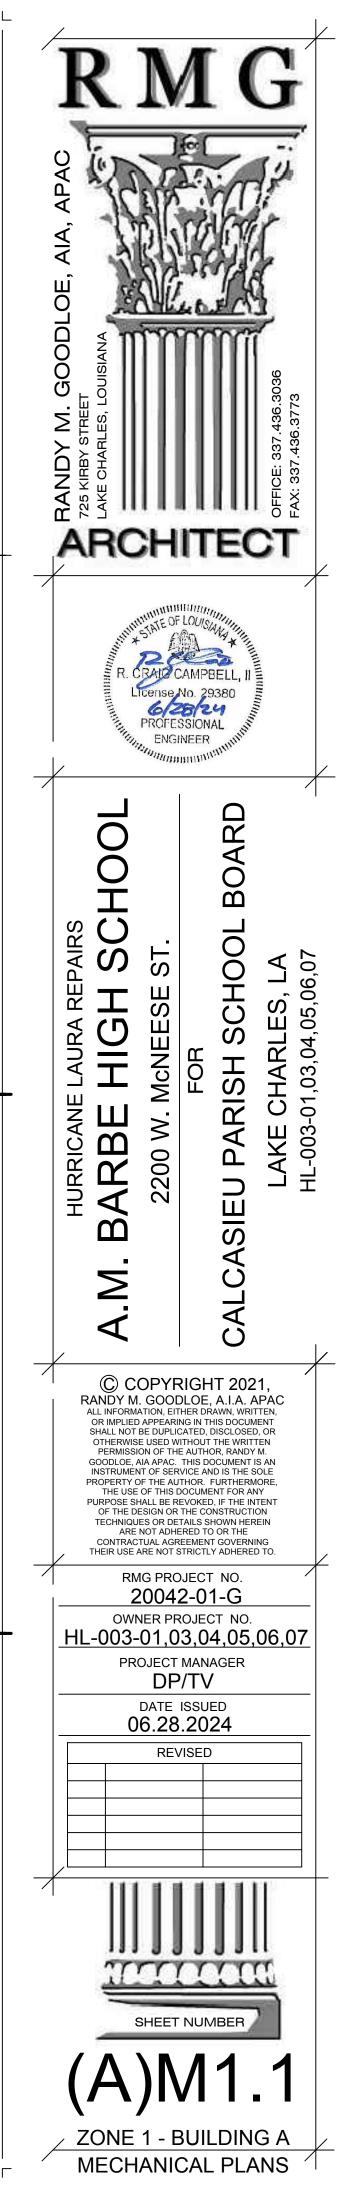


I.

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING ELECTRICAL EQUIPMENT SIZES IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR ORDERING NEW EQUIPMENT.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.

1

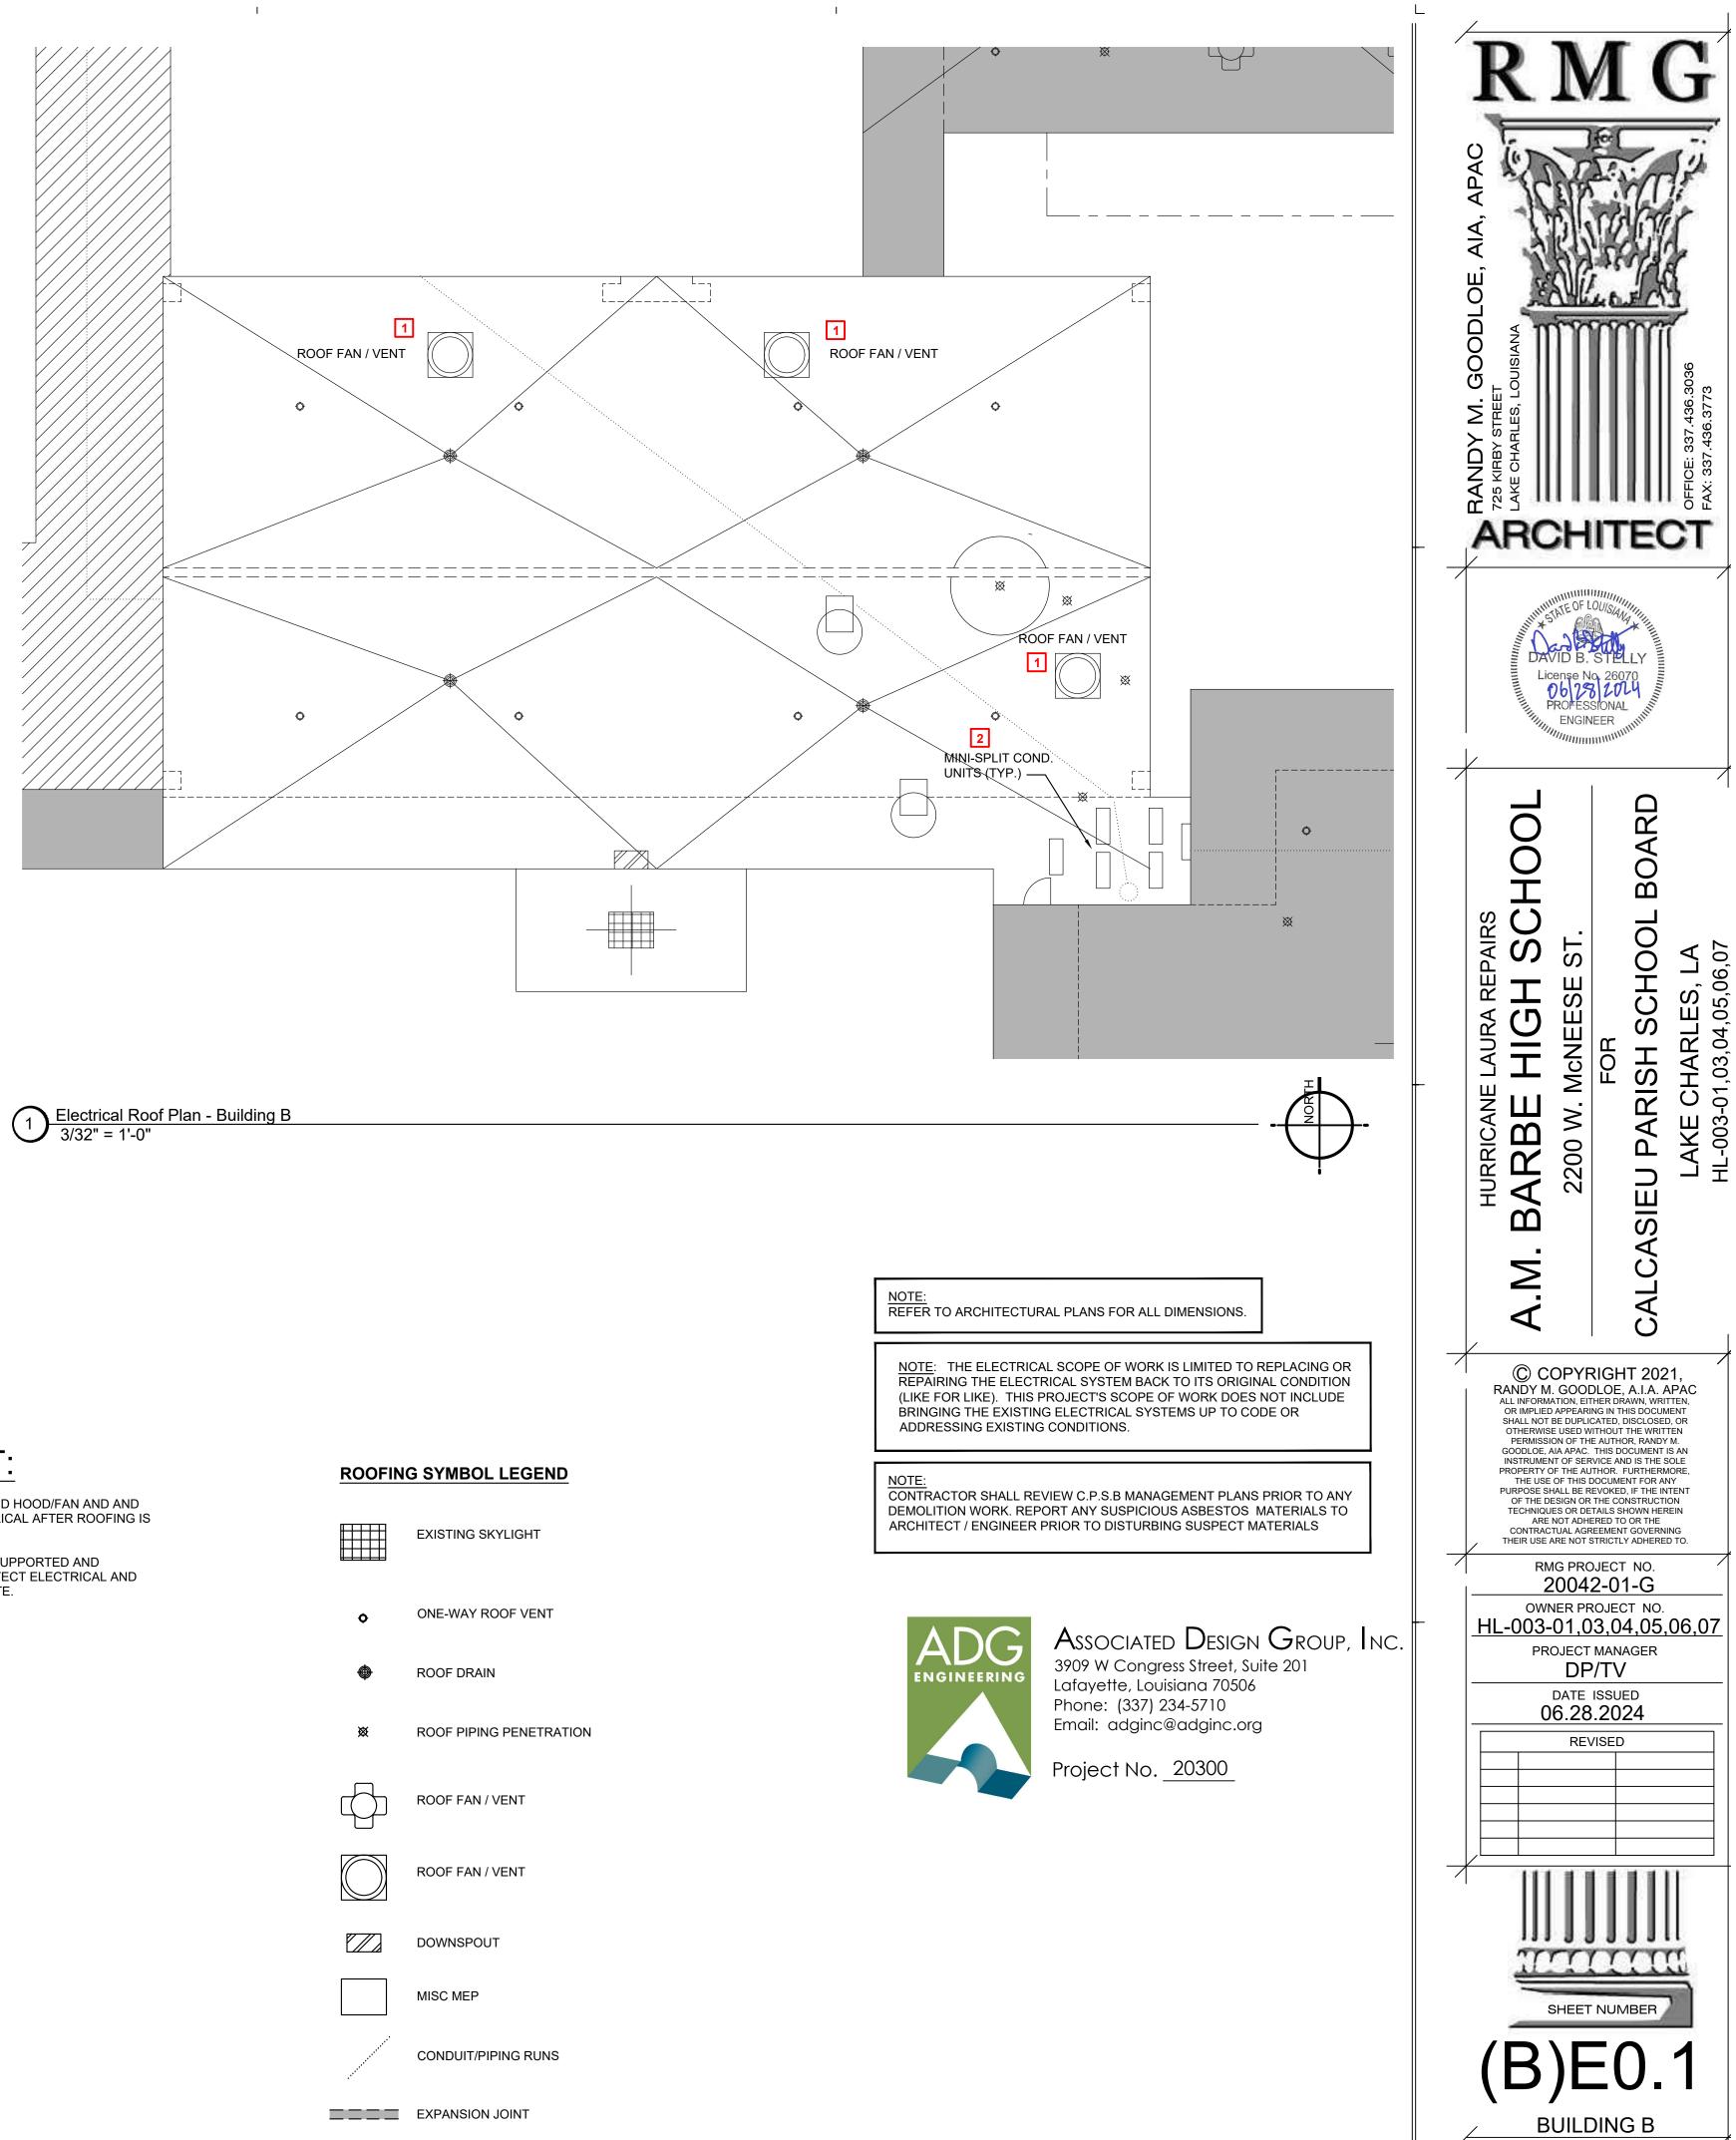

1



KEYNOTES TO SHEET:

I.

I.

- CONTRACTOR SHALL REMOVE EXISTING ROOF MOUNTED HOOD/FAN AND AND INSTALL ON NEW CURB. RECONNECT EXISTING ELECTRICAL AFTER ROOFING IS COMPLETE.
- 2. EXISTING CONDENSING UNIT SHALL BE TEMPORARILY SUPPORTED AND PROTECTED DURING THE RE-ROOFING PROJECT. PROTECT ELECTRICAL AND VERIFY PROPER OPERATION AFTER ROOFING COMPLETE.

	EXISTING SKYLIGHT
٥	ONE-WAY ROOF VENT
•	ROOF DRAIN
斑	ROOF PIPING PENETRATION
	ROOF FAN / VENT
\bigcirc	ROOF FAN / VENT
	DOWNSPOUT
	MISC MEP
	CONDUIT/PIPING RUNS
	EXPANSION JOINT

1

ROOF PLAN




GENERAL NOTES:

- A. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR TO ORDERING LIGHT FIXTURES.
- B. THE INTENT OF THE PLAN IS FOR EXISTING CIRCUITING TO REMAIN AND BE RE-USED. ALL EXISTING POWER WIRING SHALL BE PROTECTED DURING DEMOLITON AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- D. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF THE 2020 EDITION OF NEC.
- E. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.
- F. EXISTING LIGHTING THROUGHOUT THE BUIDING HAS BEEN REPLACED BY THE OWNER IN A PREVIOUS PROJECT. IF THERE ARE SPACES WHERE THE DRAWINGS REQUIRE CEILING REPLACEMENT, THE CONTRACTOR WILL BE REQUIRED TO REMOVE THE EXISTING FIXTURES, PROPERLY STORE THEM ONSITE (CONTAINER OR OTHER OWNER APPROVED AREA), THEN RE-INSTALL FOLLOWING REPLACEMENT OF CEILINGS WITHIN A GIVEN SPACE.
- G. ALL EXISTING LOW VOLTAGE WIRING SHALL BE PROTECTED DURING DEMOLITION AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.

TYPICAL EXISTING CLASSROOM LIGHTING

1



1

- B209

1

NOTE: REFER TO ARCHITECTURAL DRAWINGS FOR ALL DIMENSIONS.

KEYNOTES:

1

1. ANY EXISTING CAMERAS OR WIRELESS ACCESS POINTS TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH CPSB IT DEPARTMENT. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED COMMUNICATIONS CABLING.

2. ANY EXISTING FIRE ALARM DEVICES TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH SYLVAN SOUND. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED FIRE ALARM WIRING.

3. ANY EXISTING INTERCOM DEVICES TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH SYLVAN SOUND. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED INTERCOM WIRING.

4. EXISTING LOCATION OF IT RACK. CONTRACTOR IS RESPONSIBLE FOR PROTECTING IT RACK, EQUIPMENT, AND WIRING DURING CONSTRUCTION. IT RACK SHALL REMAIN OPERATIONAL THROUGHOUT CONSTRUCTION UNLESS APPROVED BY CPSB IT FOR IT TO BE POWERED DOWN. PROVIDE COVER FOR RACK TO MINIMIZE DUST AND DEBRIS WHILE AT THE SAME TIME ALLOWING COOLING AND PROPER AIRFLOW.

> NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS


NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.


NOTE: THE ELECTRICAL SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE ELECTRICAL SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE). THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING THE EXISTING ELECTRICAL SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS.



Associated Design G_{ROUP} , Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org


Project No. 20300

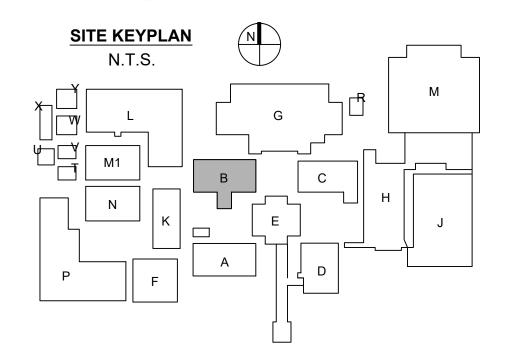

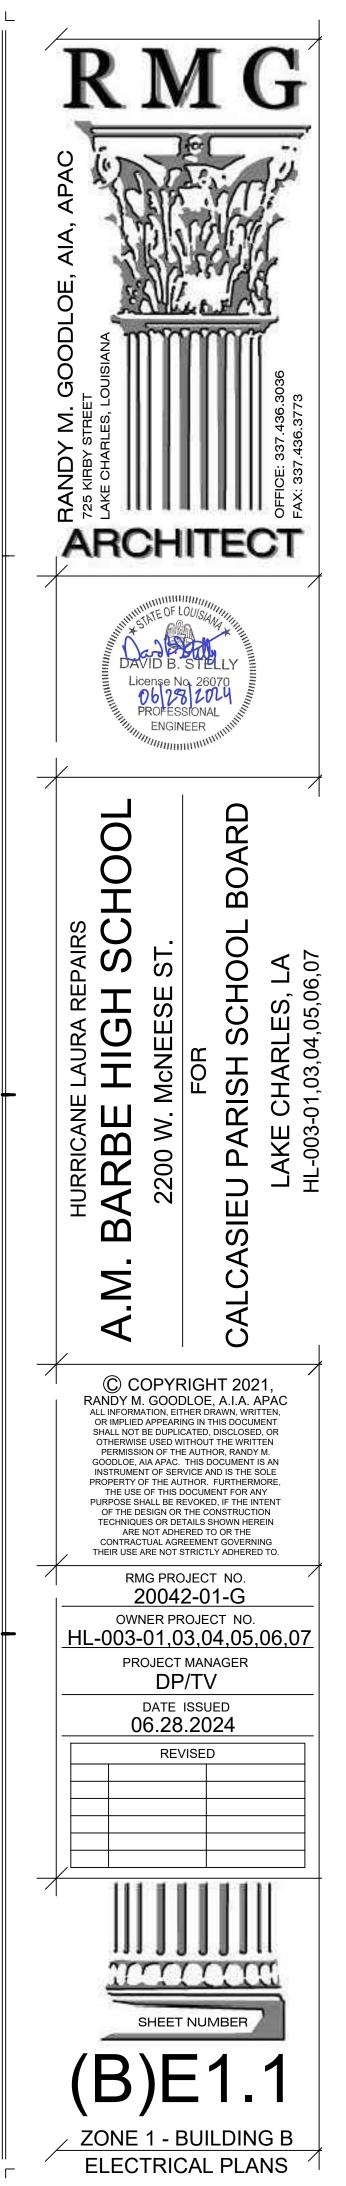

1


- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

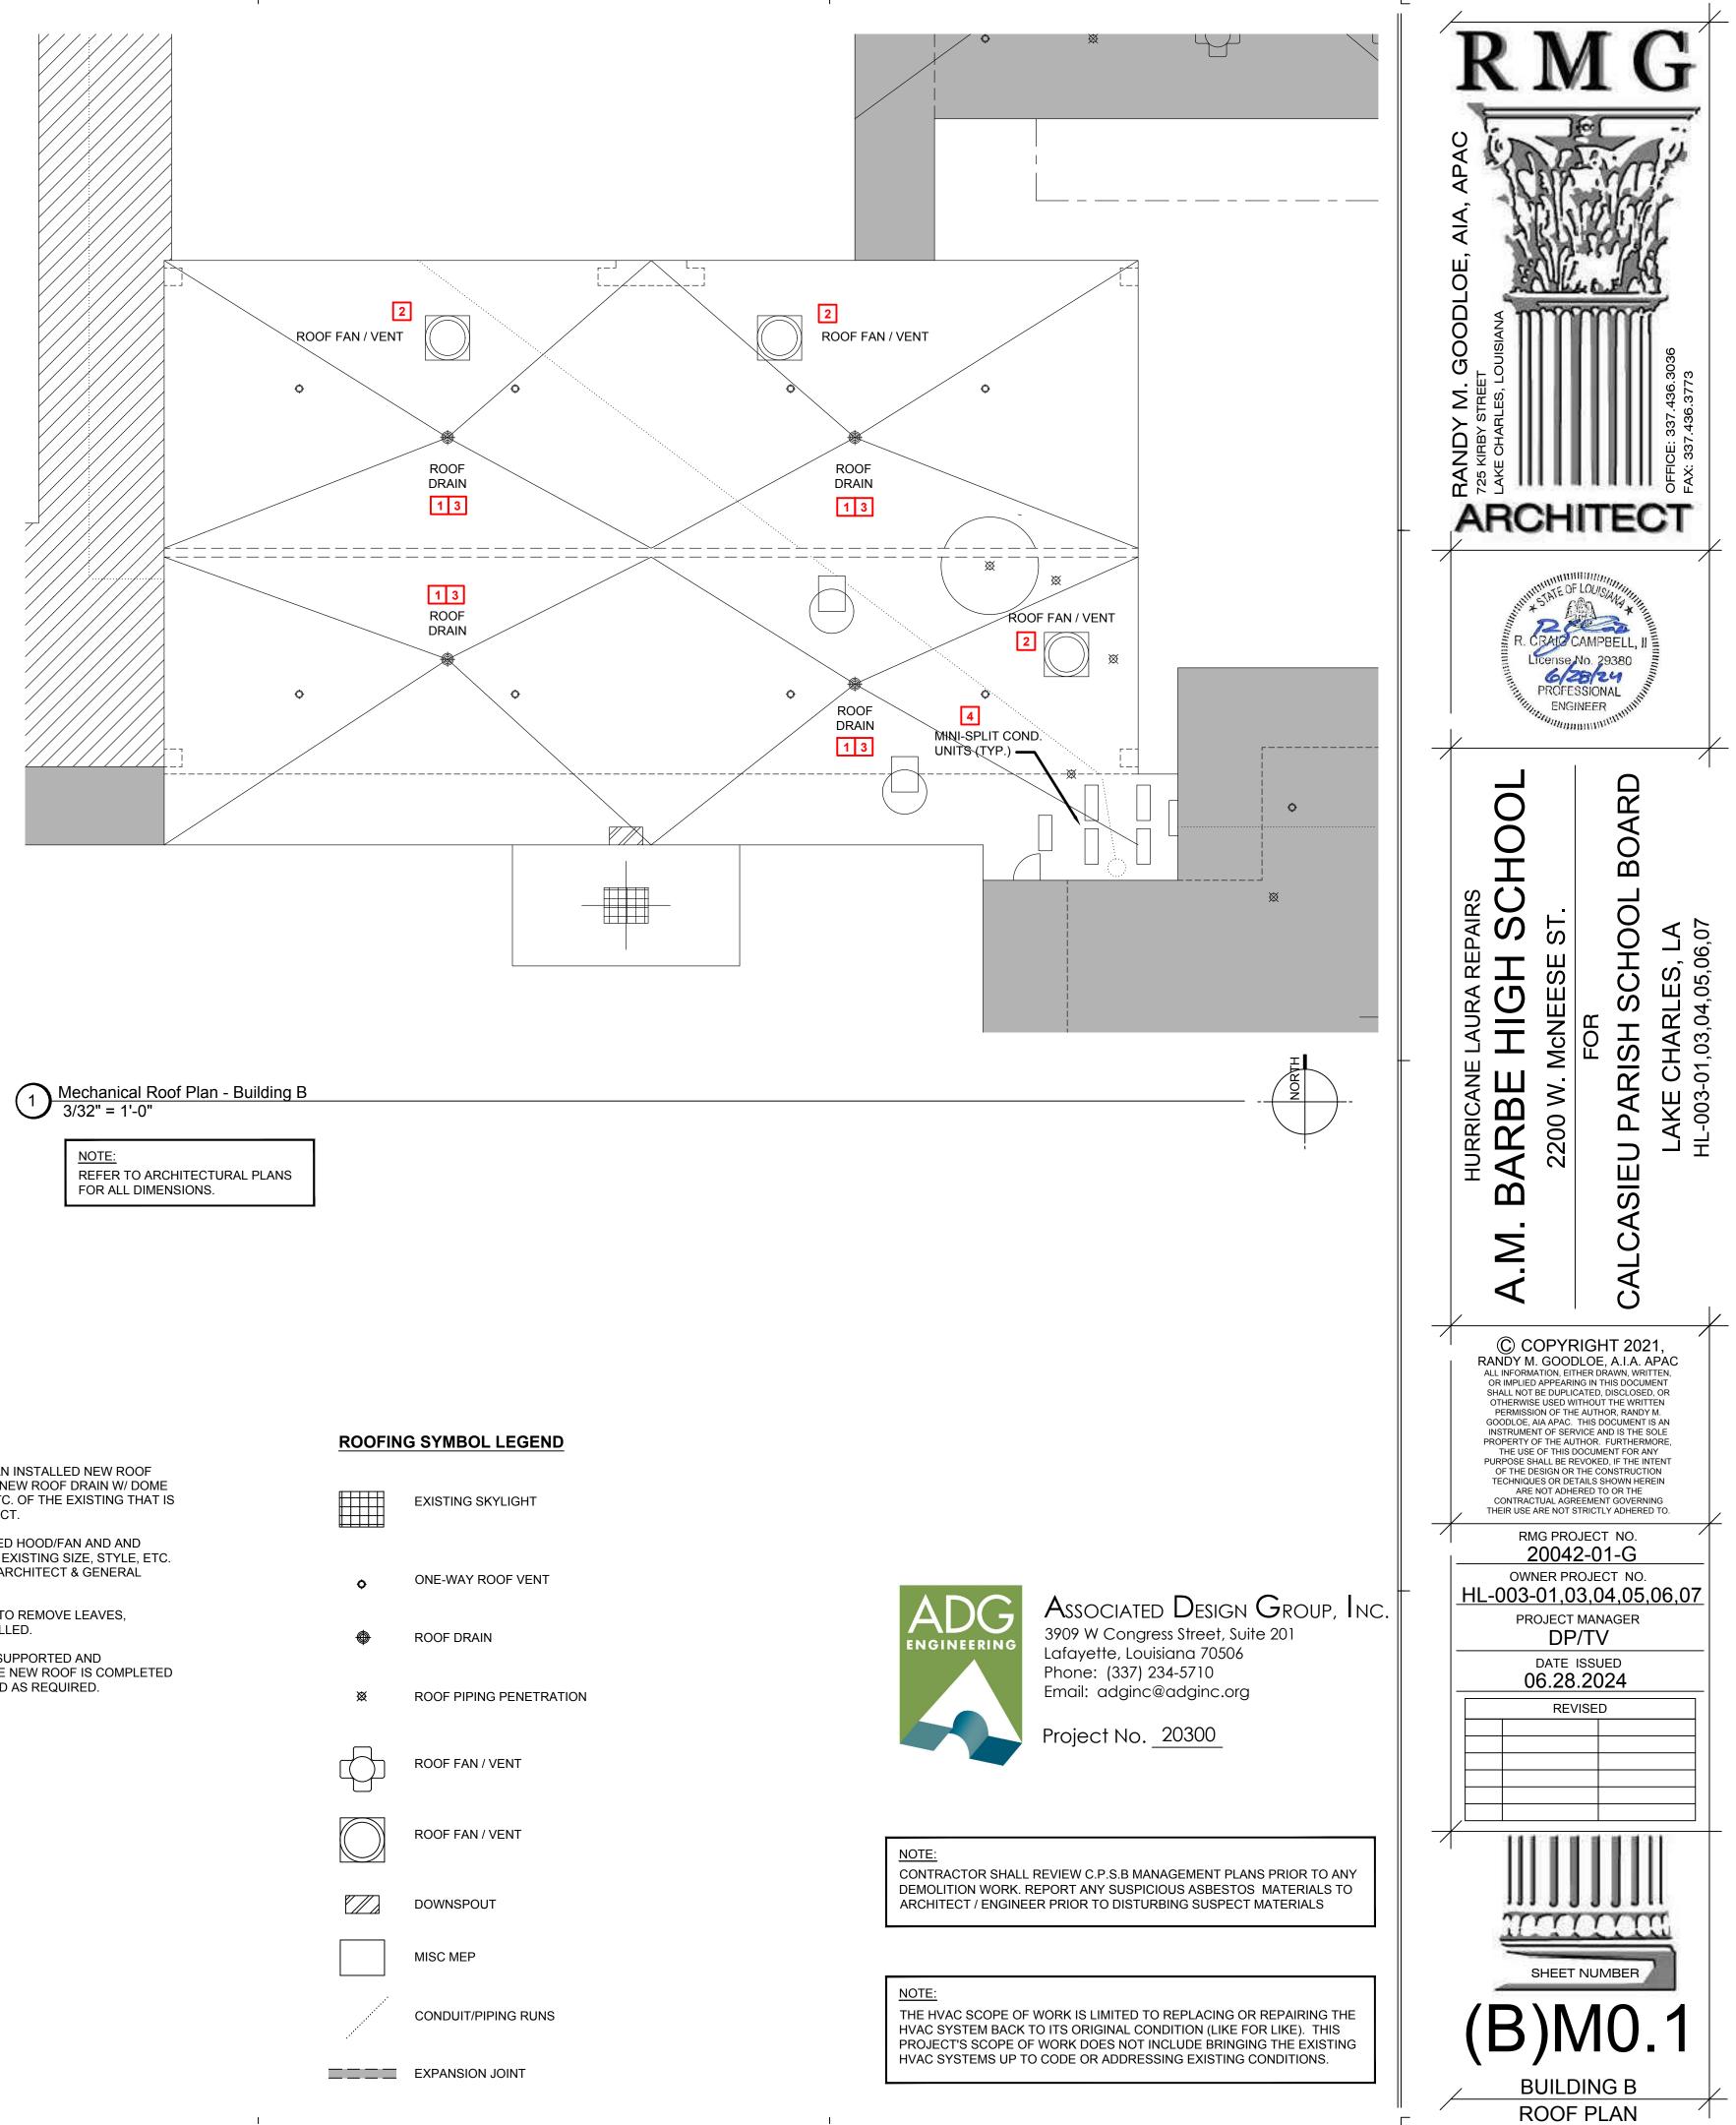

KEYNOTES TO SHEET:

- 1. CONTRACTOR SHALL REMOVE EXISTING ROOF DRAIN AN INSTALLED NEW ROOF DRAIN WITH DOME STRAINER IN SAME LOCATION. THE NEW ROOF DRAIN W/ DOME STRAINER SHALL MATCH THE EXISTING SIZE, STYLE, ETC. OF THE EXISTING THAT IS BEING REPLACED AS PART OF THE RE-ROOFING PROJECT. 2. CONTRACTOR SHALL REMOVE EXISTING ROOF MOUNTED HOOD/FAN AND AND INSTALL ON NEW CURB. NEW CURB SHALL MATCH THE EXISTING SIZE, STYLE, ETC. OF EXISTING CURB. COORDINATE CURB HEIGHT WITH ARCHITECT & GENERAL CONTRACTOR PRIOR ORDERING.
- 3. ALL EXISTING ROOF DRAIN PIPING SHALL BE FLUSHED TO REMOVE LEAVES, DEBRIS, ETC. ONCE THE NEW ROOF DRAINS ARE INSTALLED.
- 4. EXISTING CONDENSING UNIT SHALL BE TEMPORARILY SUPPORTED AND PROTECTED DURING THE RE-ROOFING PROJECT. ONCE NEW ROOF IS COMPLETED PERMANENT SUPPORTS/SLEEPERS SHALL BE PROVIDED AS REQUIRED.

	EXISTING SKYLIGHT
¢	ONE-WAY ROOF VENT
•	ROOF DRAIN
×	ROOF PIPING PENETRATION
	ROOF FAN / VENT
\bigcirc	ROOF FAN / VENT
	DOWNSPOUT
	MISC MEP
	CONDUIT/PIPING RUNS

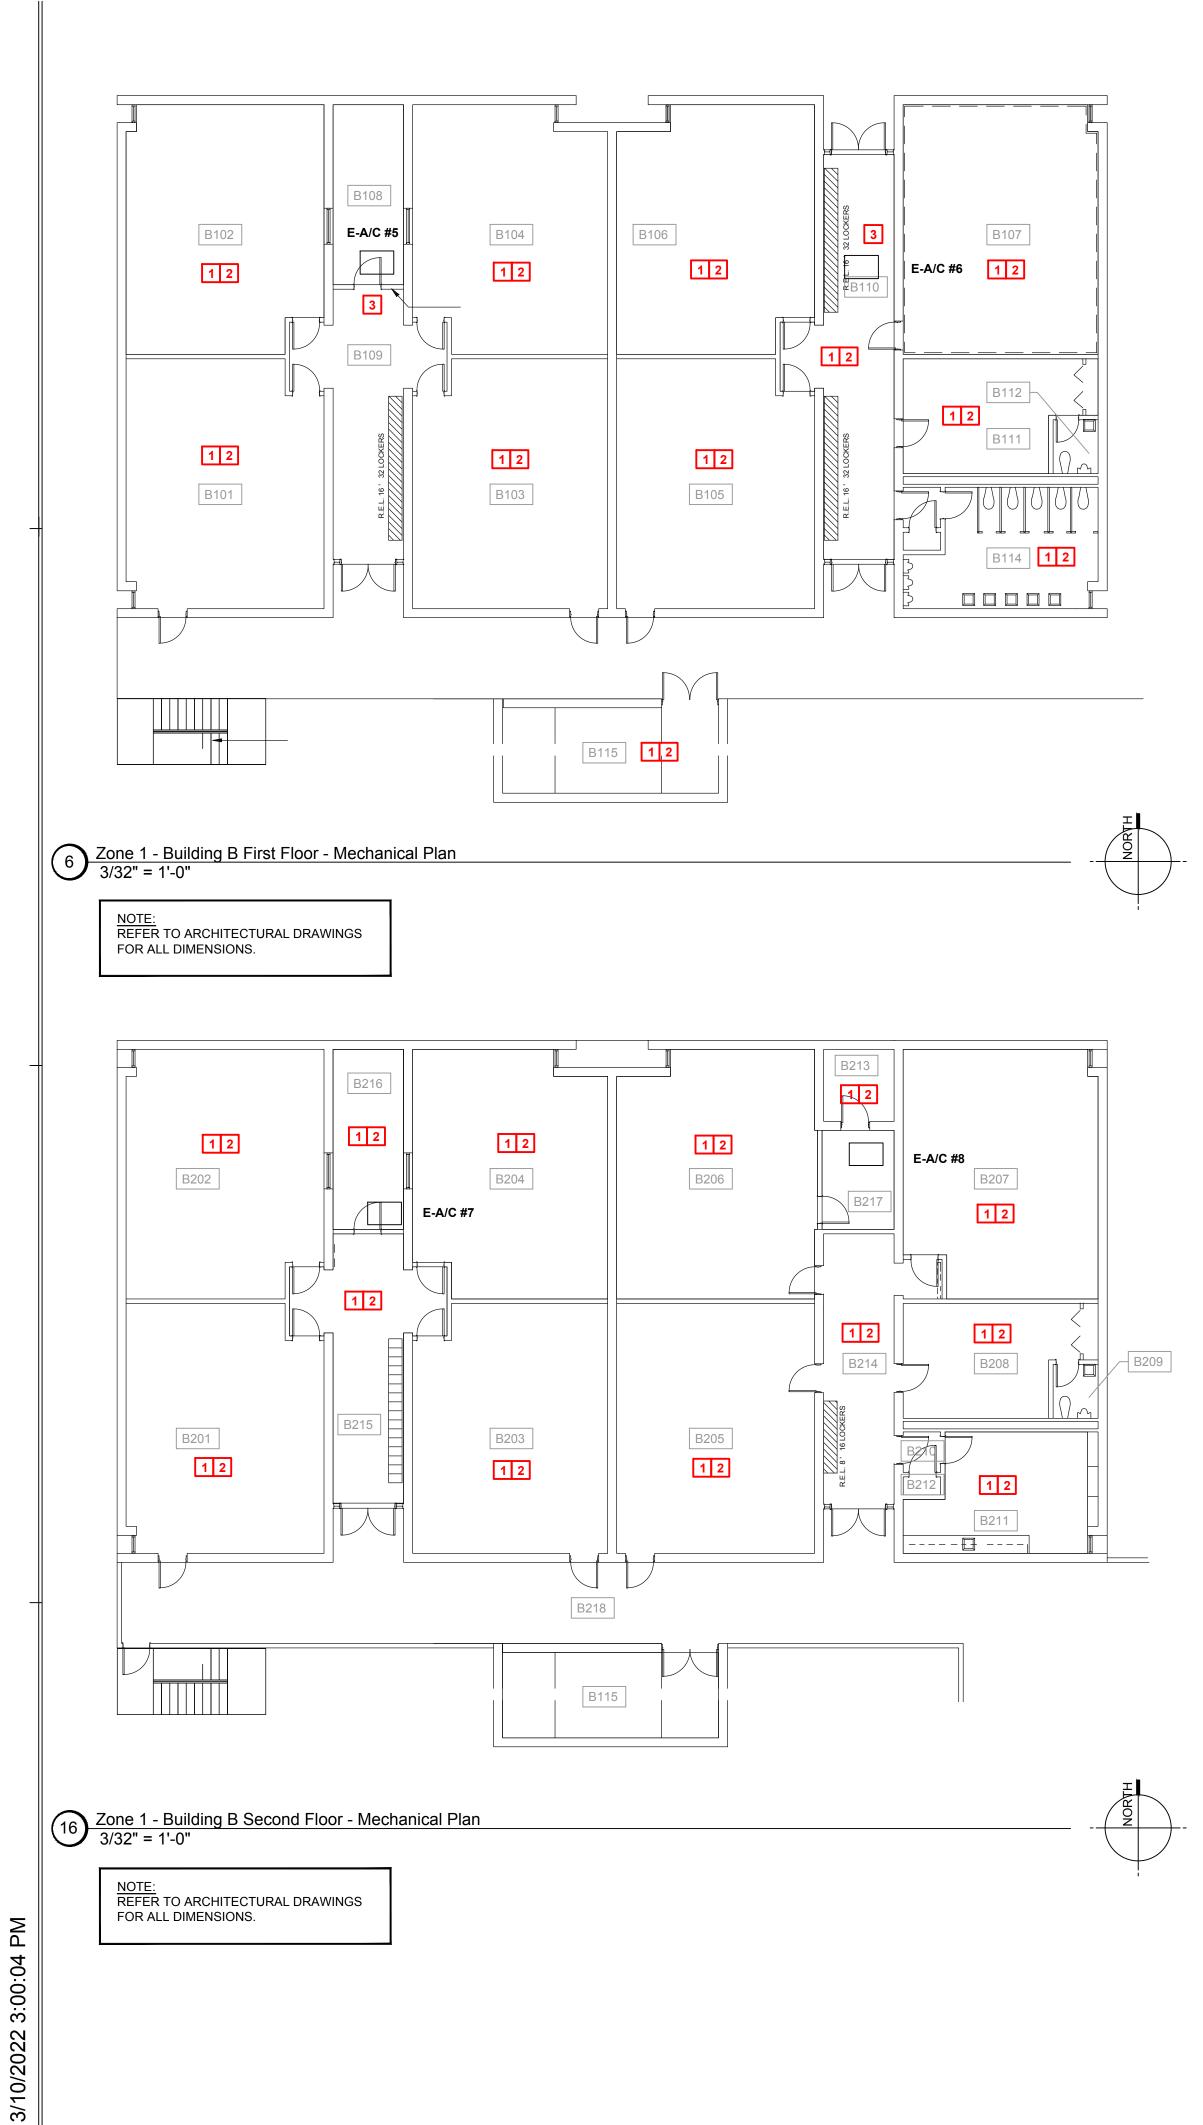

I.

1

1

1

GENERAL NOTES:

1

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

KEYNOTES TO SHEET:

- 1. NO INTERIOR MECHANICAL (PLUMBING & HVAC) WORK ASSOCIATED WITH THESE SPACES WITHIN THE BUILDING.
- 2. CONTRACTOR SHALL TEMPORARILY SUPPORT AND PROTECT ANY EQUIPMENT, DIFFUSERS, GRILLES, ETC. IN OR ABOVE CEILINGS OF THESE SPACES DURING THE REMOVAL AND INSTALLATION OF NEW CEILINGS. REFER TO ARCHITECTURAL PLANS FOR THOSE LOCATIONS.
- 3. EXISTING FAN COIL UNIT TO REMAIN AND CLEANED PER THE SPECIFICATIONS. REMOVE AND REPLACE EXISTING AIR HANDLING UNIT INTERIOR LINER AND CLEAN INTERIOR OF UNIT INCLUDING COILS.

NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS

NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.


<u>NOTE:</u> THE HVAC SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE HVAC SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE) IN MOST CIRCUMSTANCES. THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING ALL THE EXISTING HVAC SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS. ALTHOUGH ALL WORK MUST COMPLY WITH FEMA CONSENSUS-BASED, "LATEST PUBLISHED EDITIONS" OF CODES NOT NECESSARILY THOSE CODES ADOPTED BY THE LOCAL MUNICIPALITY.




1

Associated Design G_{ROUP} , Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

Project No. 20300

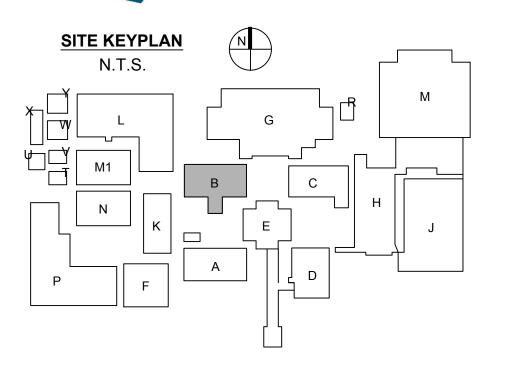


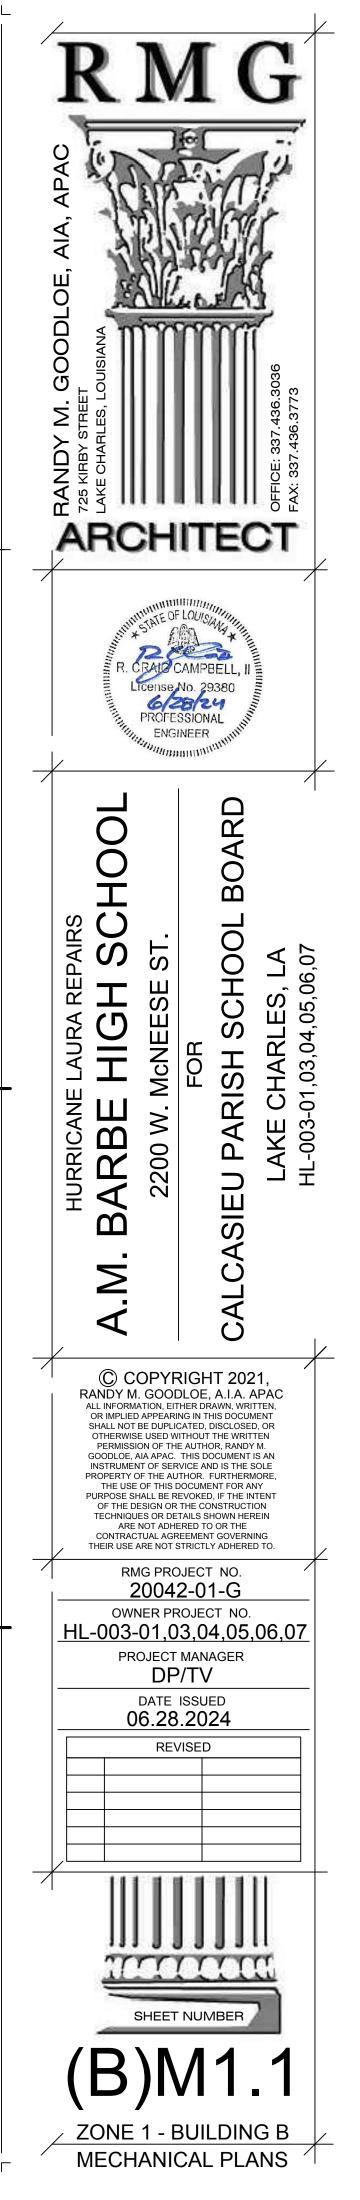


I.

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING ELECTRICAL EQUIPMENT SIZES IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR ORDERING NEW EQUIPMENT.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.

1

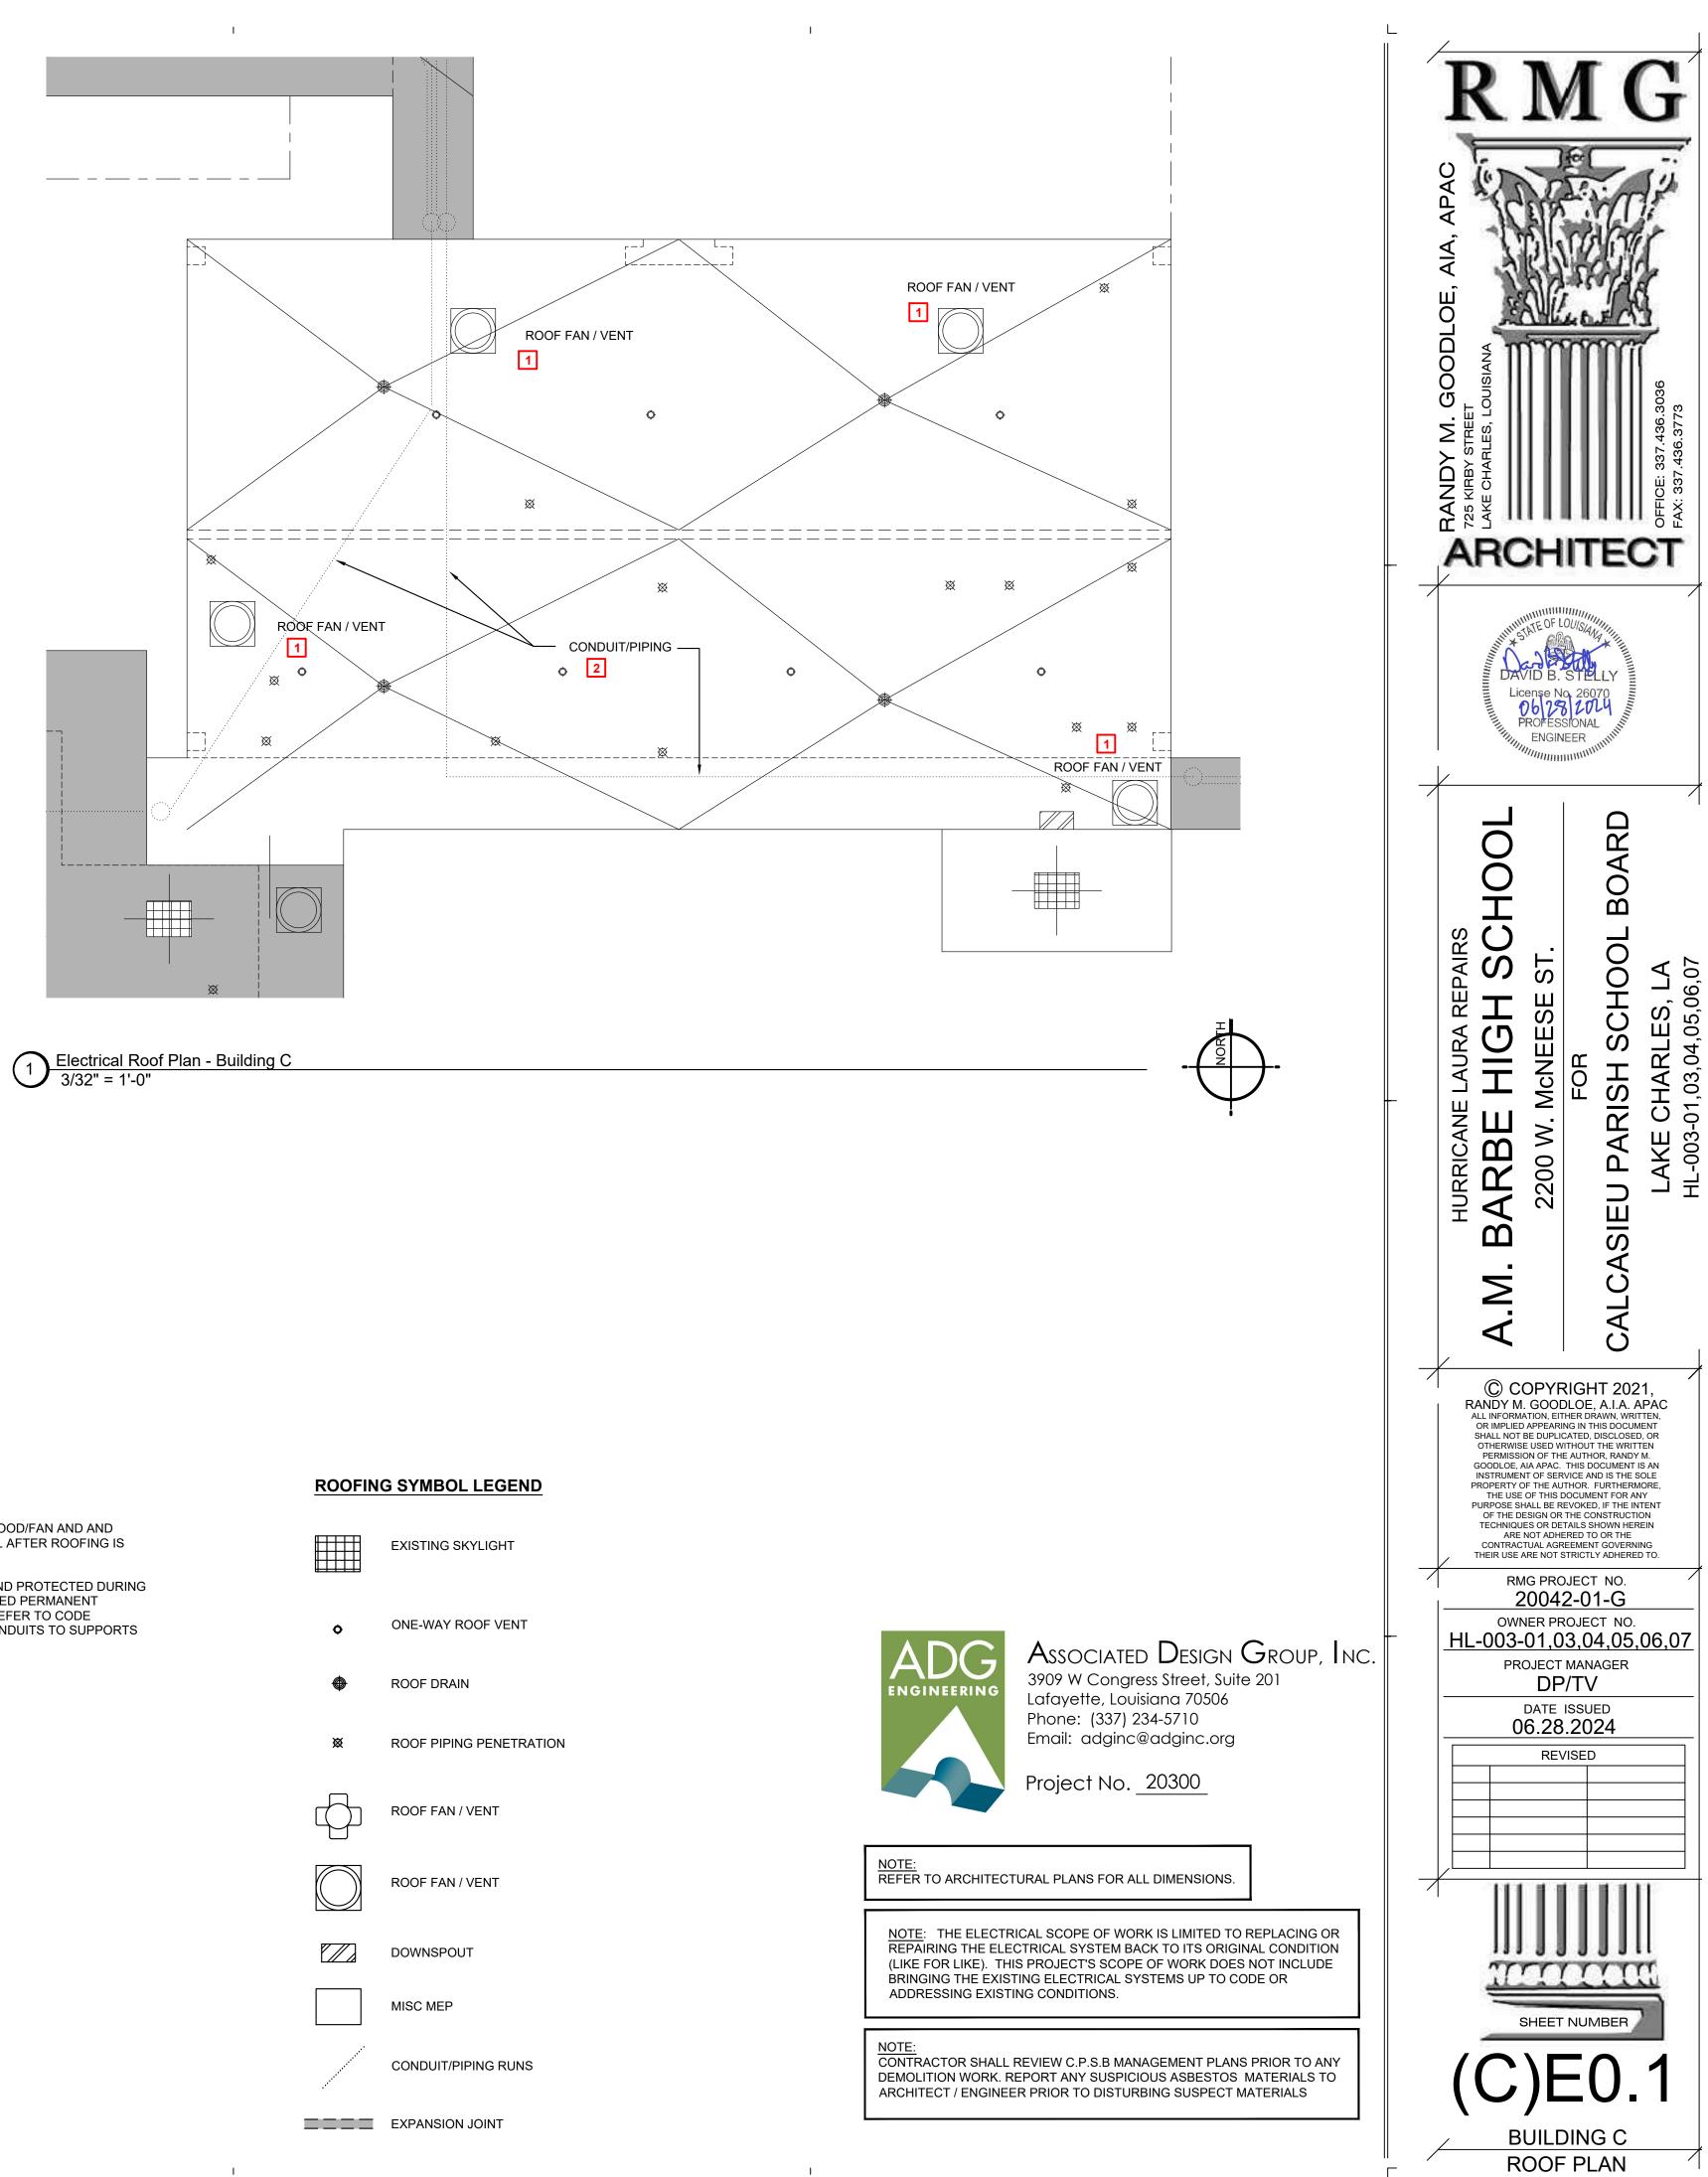




KEYNOTES TO SHEET:

I.

I.

- 1. CONTRACTOR SHALL REMOVE EXISTING ROOF MOUNTED HOOD/FAN AND AND INSTALL ON NEW CURB. RECONNECT EXISTING ELECTRICAL AFTER ROOFING IS COMPLETE.
- 2. EXISTING CONDUIT SHALL BE TEMPORARILY SUPPORTED AND PROTECTED DURING THE RE-ROOFING PROJECT. ONCE NEW ROOF IS COMPLETED PERMANENT CONDUIT SUPPORTS SHALL BE PROVIDED AS REQUIRED. REFER TO CODE REQUIREMENTS FOR SPACING OF SUPPORTS. SECURE CONDUITS TO SUPPORTS WITH CLAMPS AS NECESSARY.

	EXISTING SKYLIGHT
¢	ONE-WAY ROOF VENT
۲	ROOF DRAIN
∞	ROOF PIPING PENETRATION
	ROOF FAN / VENT
\bigcirc	ROOF FAN / VENT
	DOWNSPOUT
	MISC MEP
	CONDUIT/PIPING RUNS

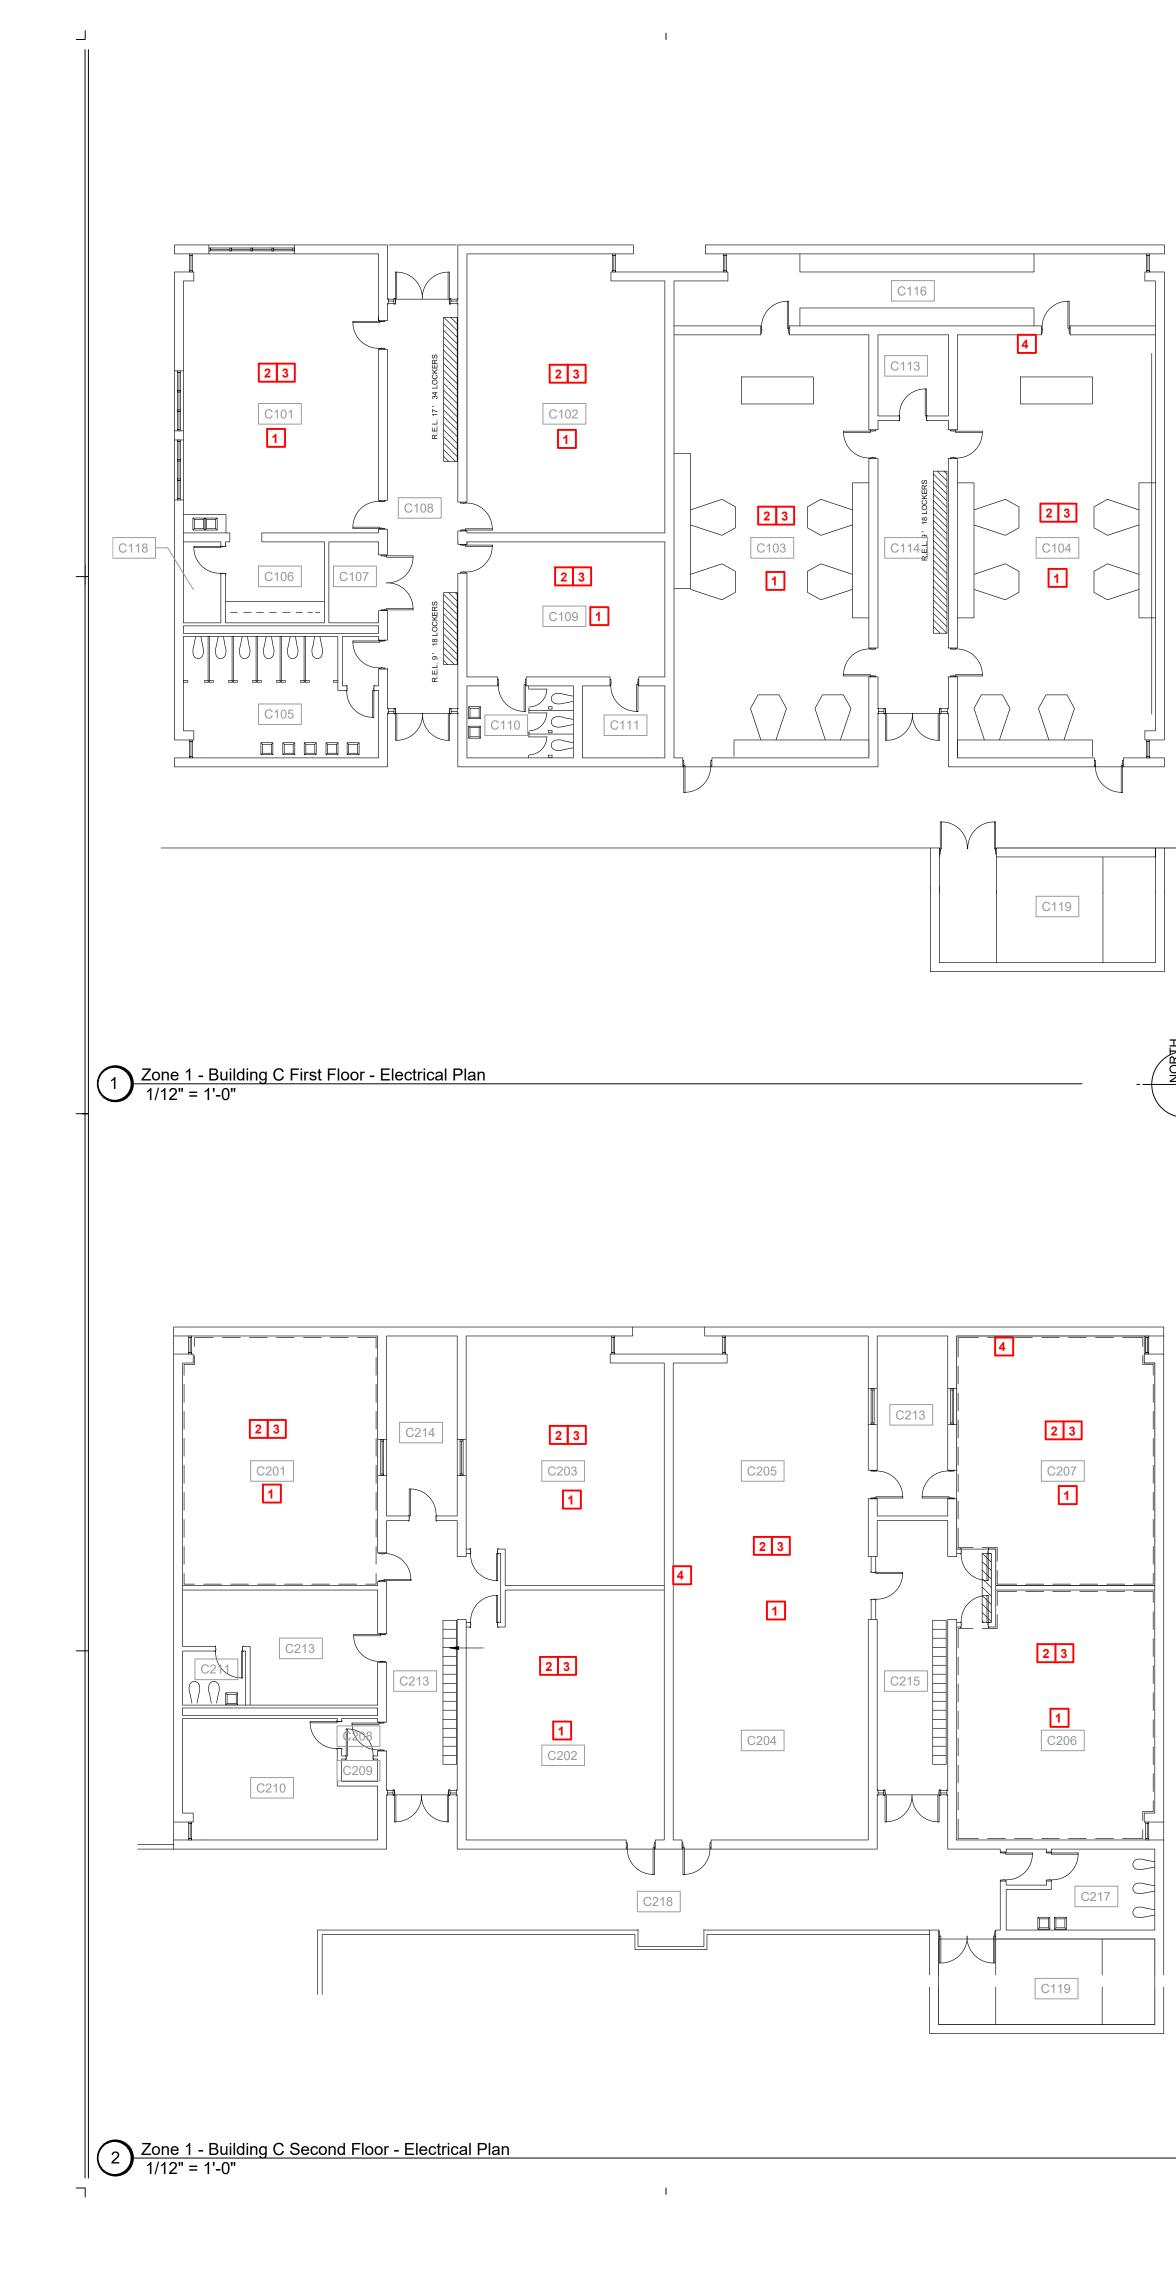

1

1

A. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR TO ORDERING LIGHT FIXTURES.

1

- B. THE INTENT OF THE PLAN IS FOR EXISTING CIRCUITING TO REMAIN AND BE RE-USED. ALL EXISTING POWER WIRING SHALL BE PROTECTED DURING DEMOLITON AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- D. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF THE 2020 EDITION OF NEC.
- E. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.
- F. EXISTING LIGHTING THROUGHOUT THE BUIDING HAS BEEN REPLACED BY THE OWNER IN A PREVIOUS PROJECT. IF THERE ARE SPACES WHERE THE DRAWINGS REQUIRE CEILING REPLACEMENT, THE CONTRACTOR WILL BE REQUIRED TO REMOVE THE EXISTING FIXTURES, PROPERLY STORE THEM ONSITE (CONTAINER OR OTHER OWNER APPROVED AREA), THEN RE-INSTALL FOLLOWING REPLACEMENT OF CEILINGS WITHIN A GIVEN SPACE.
- G. ALL EXISTING LOW VOLTAGE WIRING SHALL BE PROTECTED DURING DEMOLITION AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.

1



KEYNOTES:

1. ANY EXISTING CAMERAS OR WIRELESS ACCESS POINTS TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH CPSB IT DEPARTMENT. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED COMMUNICATIONS CABLING.

2. ANY EXISTING FIRE ALARM DEVICES TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH SYLVAN SOUND. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED FIRE ALARM WIRING.

3. ANY EXISTING INTERCOM DEVICES TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH SYLVAN SOUND. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED INTERCOM WIRING.

4. EXISTING LOCATION OF IT RACK. CONTRACTOR IS RESPONSIBLE FOR PROTECTING IT RACK, EQUIPMENT, AND WIRING DURING CONSTRUCTION. IT RACK SHALL REMAIN OPERATIONAL THROUGHOUT CONSTRUCTION UNLESS APPROVED BY CPSB IT FOR IT TO BE POWERED DOWN. PROVIDE COVER FOR RACK TO MINIMIZE DUST AND DEBRIS WHILE AT THE SAME TIME ALLOWING COOLING AND PROPER AIRFLOW.

> NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS


NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.


NOTE: THE ELECTRICAL SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE ELECTRICAL SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE). THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING THE EXISTING ELECTRICAL SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS.



Associated Design Group, Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

Project No. 20300

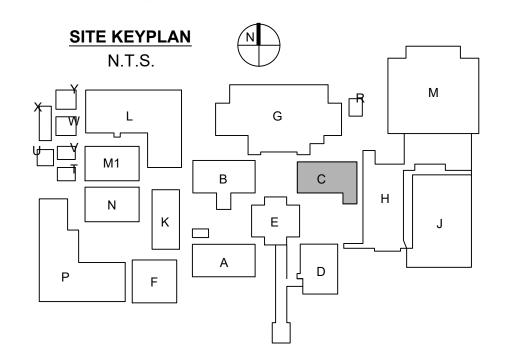


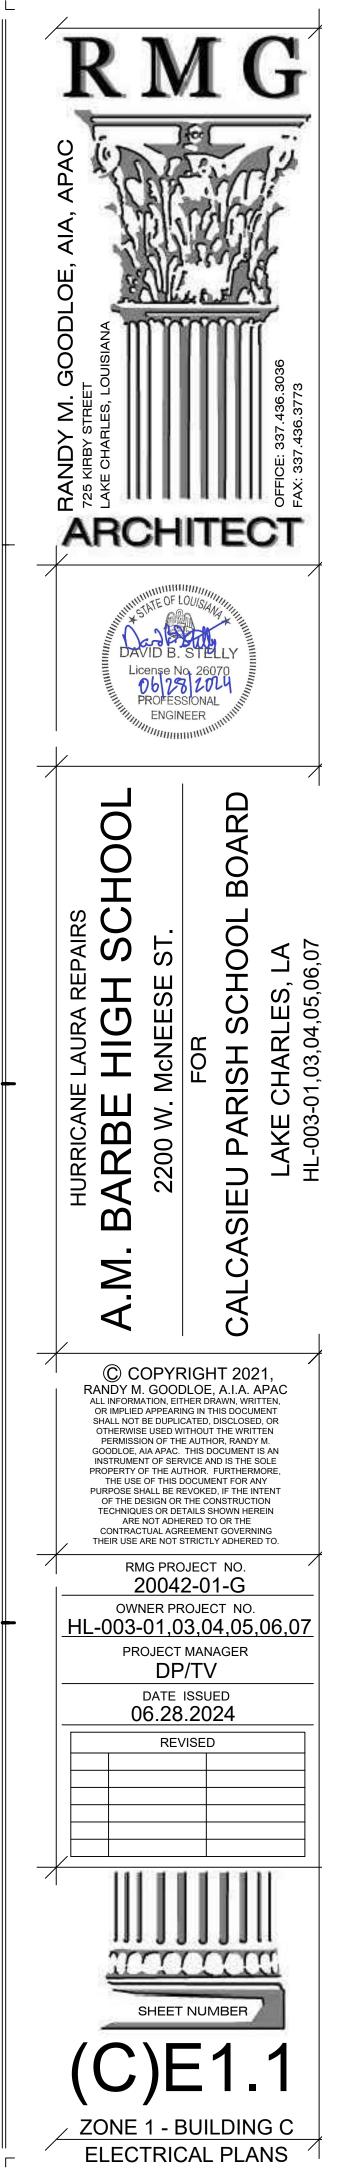

1

1

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

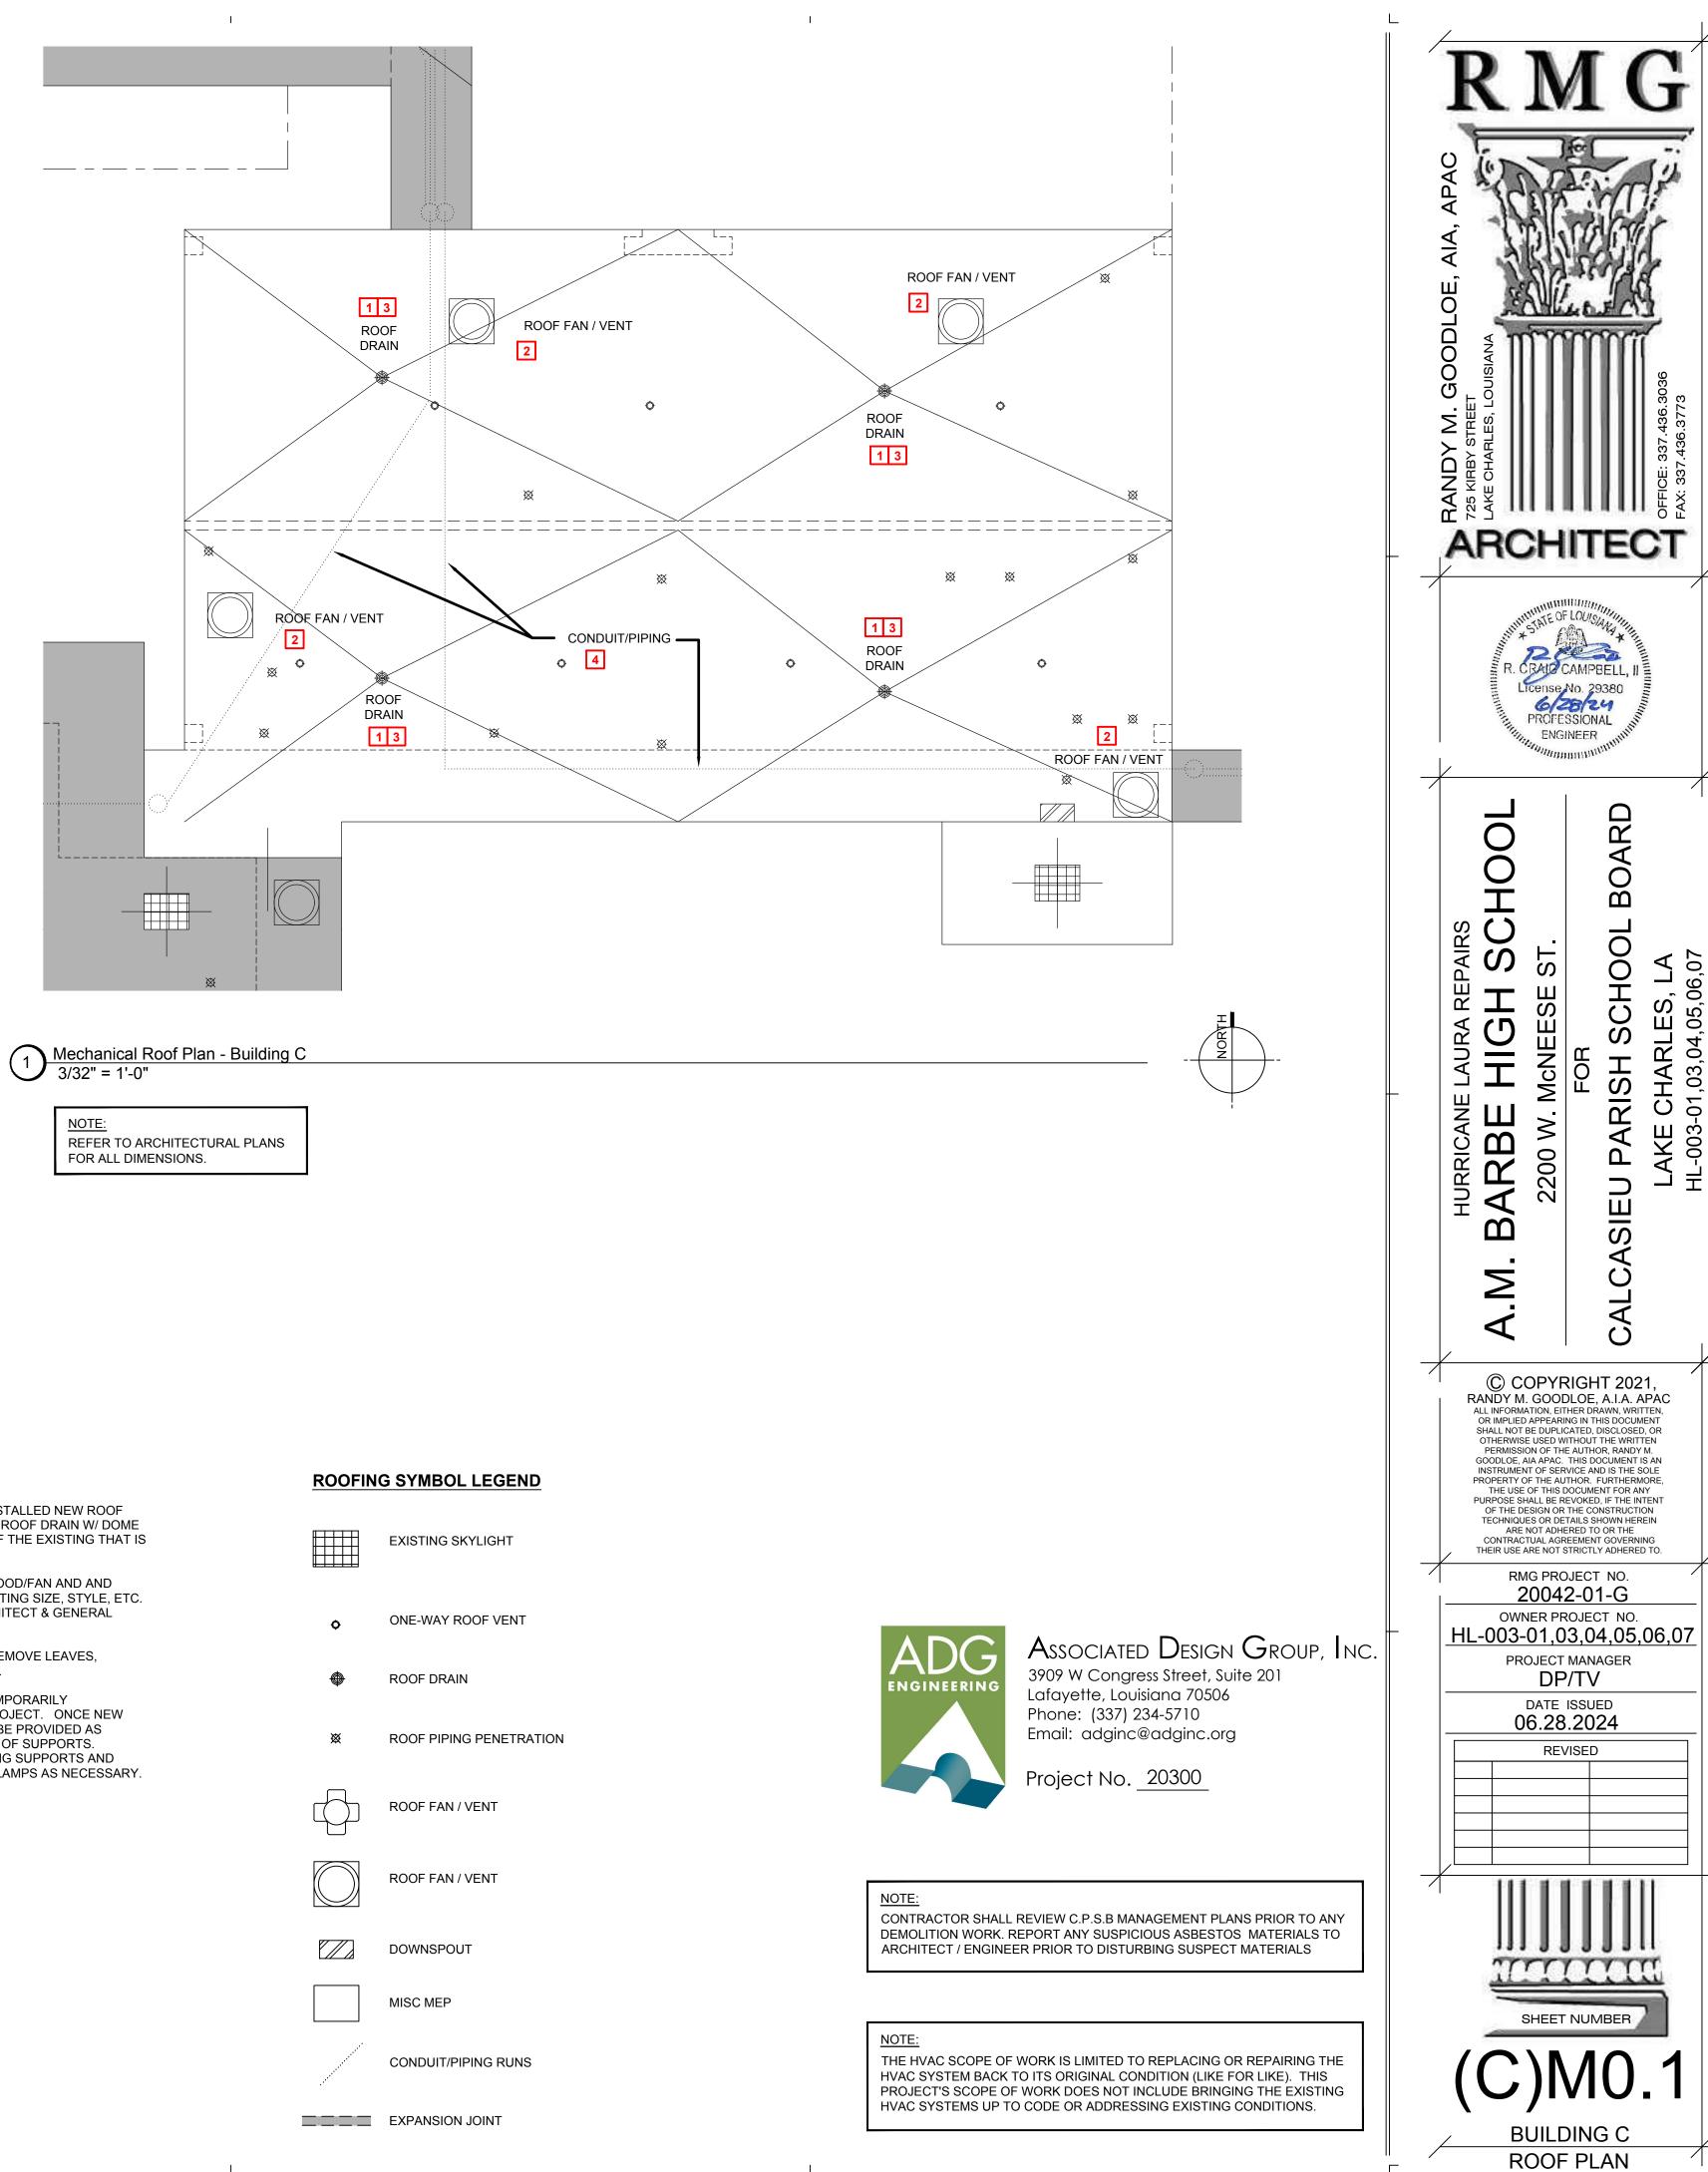

I.


KEYNOTES TO SHEET:

1

1

- 1. CONTRACTOR SHALL REMOVE EXISTING ROOF DRAIN AN INSTALLED NEW ROOF DRAIN WITH DOME STRAINER IN SAME LOCATION. THE NEW ROOF DRAIN W/ DOME STRAINER SHALL MATCH THE EXISTING SIZE, STYLE, ETC. OF THE EXISTING THAT IS BEING REPLACED AS PART OF THE RE-ROOFING PROJECT.
- 2. CONTRACTOR SHALL REMOVE EXISTING ROOF MOUNTED HOOD/FAN AND AND INSTALL ON NEW CURB. NEW CURB SHALL MATCH THE EXISTING SIZE, STYLE, ETC. OF EXISTING CURB. COORDINATE CURB HEIGHT WITH ARCHITECT & GENERAL CONTRACTOR PRIOR ORDERING.
- 3. ALL EXISTING ROOF DRAIN PIPING SHALL BE FLUSHED TO REMOVE LEAVES, DEBRIS, ETC. ONCE THE NEW ROOF DRAINS ARE INSTALLED.
- 4. EXISTING PIPING (GAS, CHILLED WATER, ETC.) SHALL BE TEMPORARILY SUPPORTED AND PROTECTED DURING THE RE-ROOFING PROJECT. ONCE NEW ROOF IS COMPLETED PERMANENT PIPING SUPPORT SHALL BE PROVIDED AS REQUIRED. REFER TO CODE REQUIREMENTS FOR SPACING OF SUPPORTS. SHIELDS SHALL BE PLACED BETWEEN CHILLED WATER PIPING SUPPORTS AND PIPING INSULATION. SECURE PIPING TO SUPPORTS WITH CLAMPS AS NECESSARY.

	EXISTING SKYLIGHT
٥	ONE-WAY ROOF VENT
۲	ROOF DRAIN
×	ROOF PIPING PENETRATION
	ROOF FAN / VENT
\bigcirc	ROOF FAN / VENT
	DOWNSPOUT
	MISC MEP
	CONDUIT/PIPING RUNS

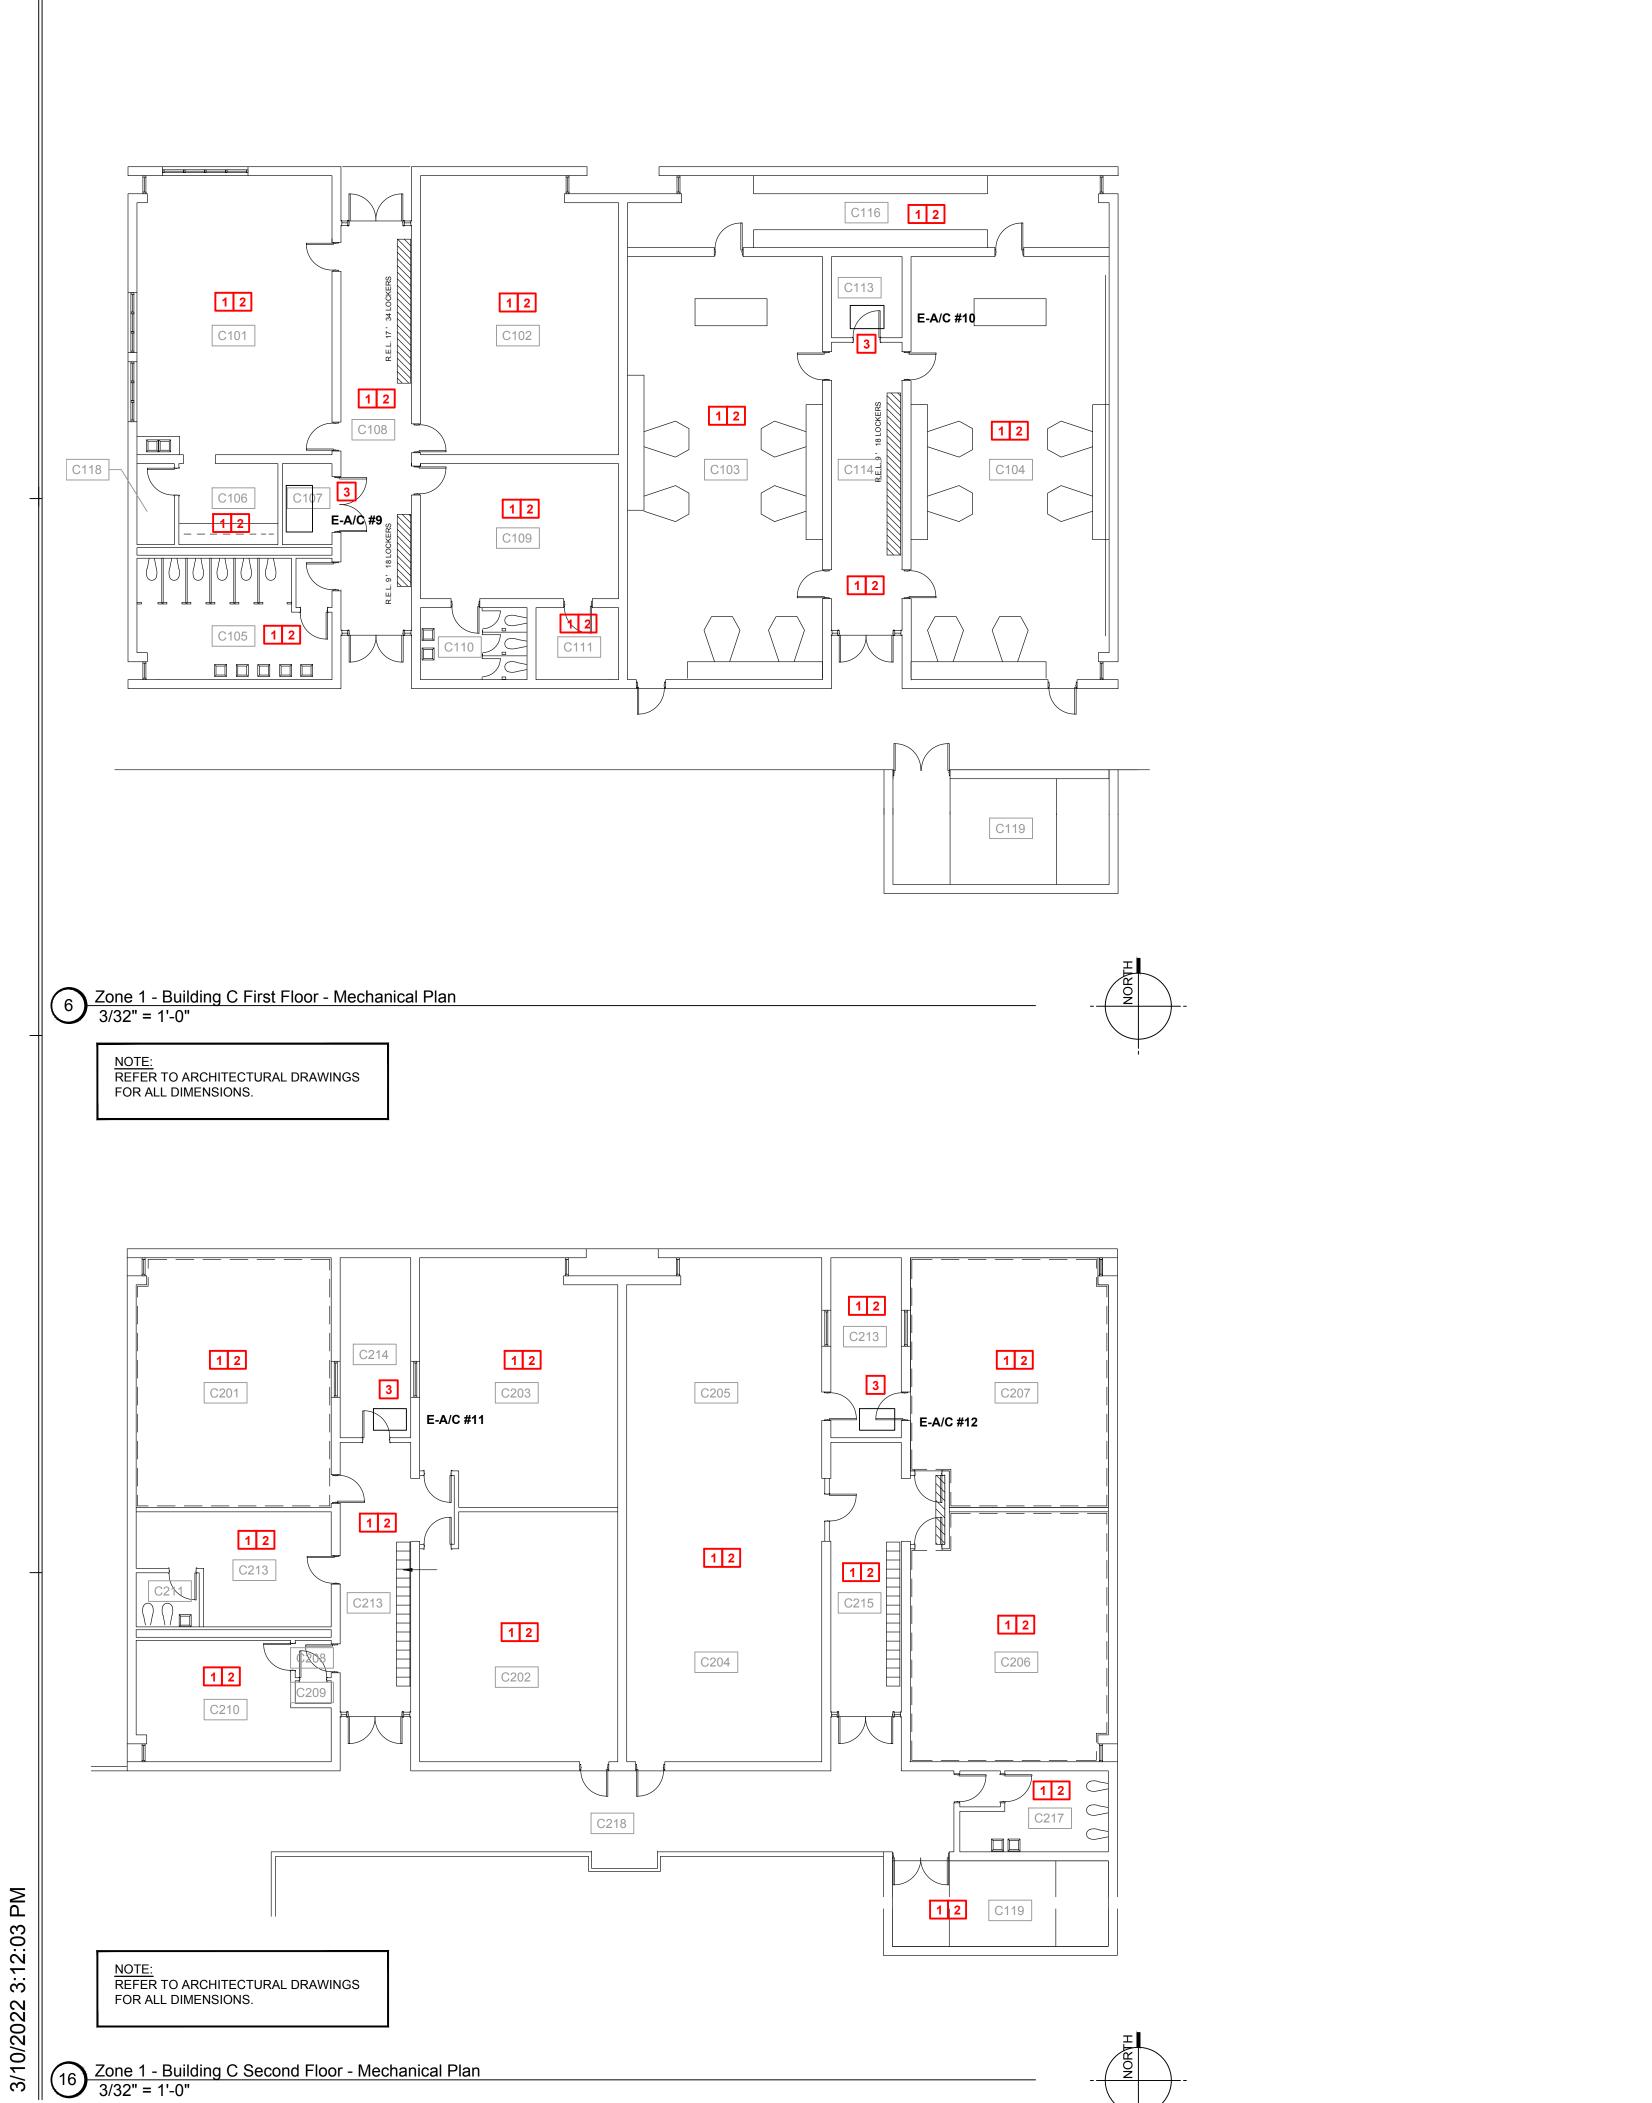

I.

Г

1

1

1

GENERAL NOTES:

1

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

KEYNOTES TO SHEET:

- 1. NO INTERIOR MECHANICAL (PLUMBING & HVAC) WORK ASSOCIATED WITH THESE SPACES WITHIN THE BUILDING.
- 2. CONTRACTOR SHALL TEMPORARILY SUPPORT AND PROTECT ANY EQUIPMENT, DIFFUSERS, GRILLES, ETC. IN OR ABOVE CEILINGS OF THESE SPACES DURING THE REMOVAL AND INSTALLATION OF NEW CEILINGS. REFER TO ARCHITECTURAL PLANS FOR THOSE LOCATIONS.
- 3. EXISTING FAN COIL UNIT TO REMAIN AND CLEANED PER THE SPECIFICATIONS. REMOVE AND REPLACE EXISTING AIR HANDLING UNIT INTERIOR LINER AND CLEAN INTERIOR OF UNIT INCLUDING COILS.

NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS

NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.


<u>NOTE:</u> THE HVAC SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE HVAC SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE) IN MOST CIRCUMSTANCES. THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING ALL THE EXISTING HVAC SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS. ALTHOUGH ALL WORK MUST COMPLY WITH FEMA CONSENSUS-BASED, "LATEST PUBLISHED EDITIONS" OF CODES NOT NECESSARILY THOSE CODES ADOPTED BY THE LOCAL MUNICIPALITY.




1

Associated Design Group, Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

Project No. <u>20300</u>

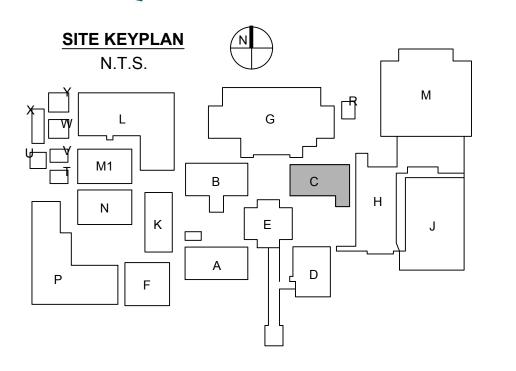


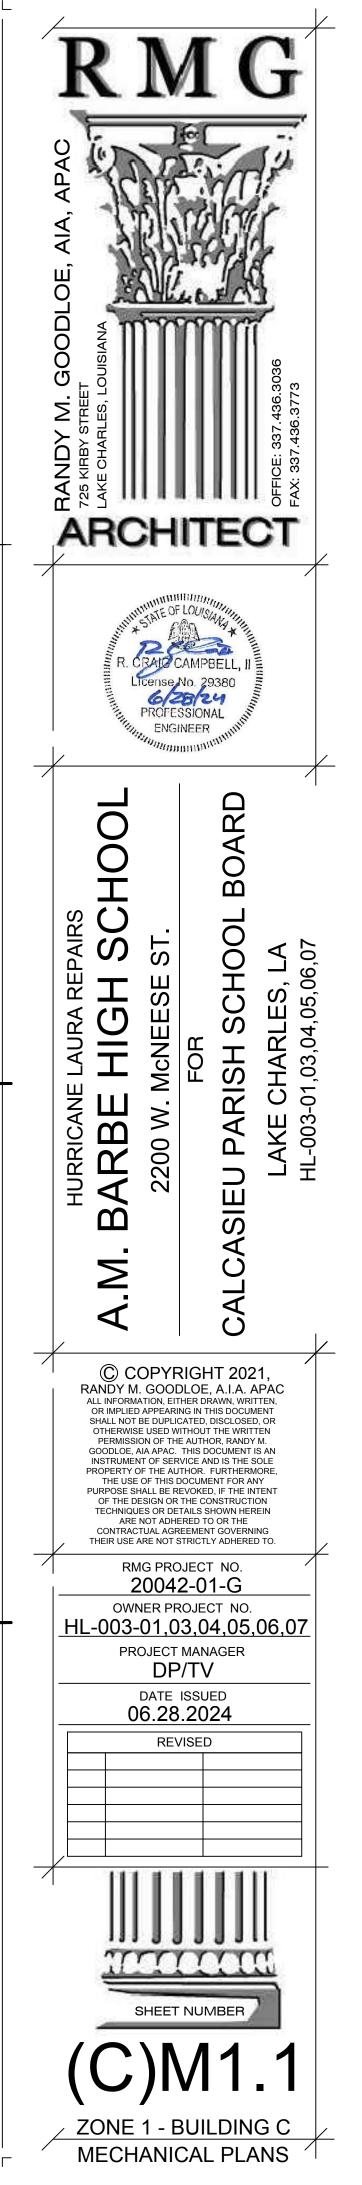

- I

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING ELECTRICAL EQUIPMENT SIZES IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR ORDERING NEW EQUIPMENT.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.

1

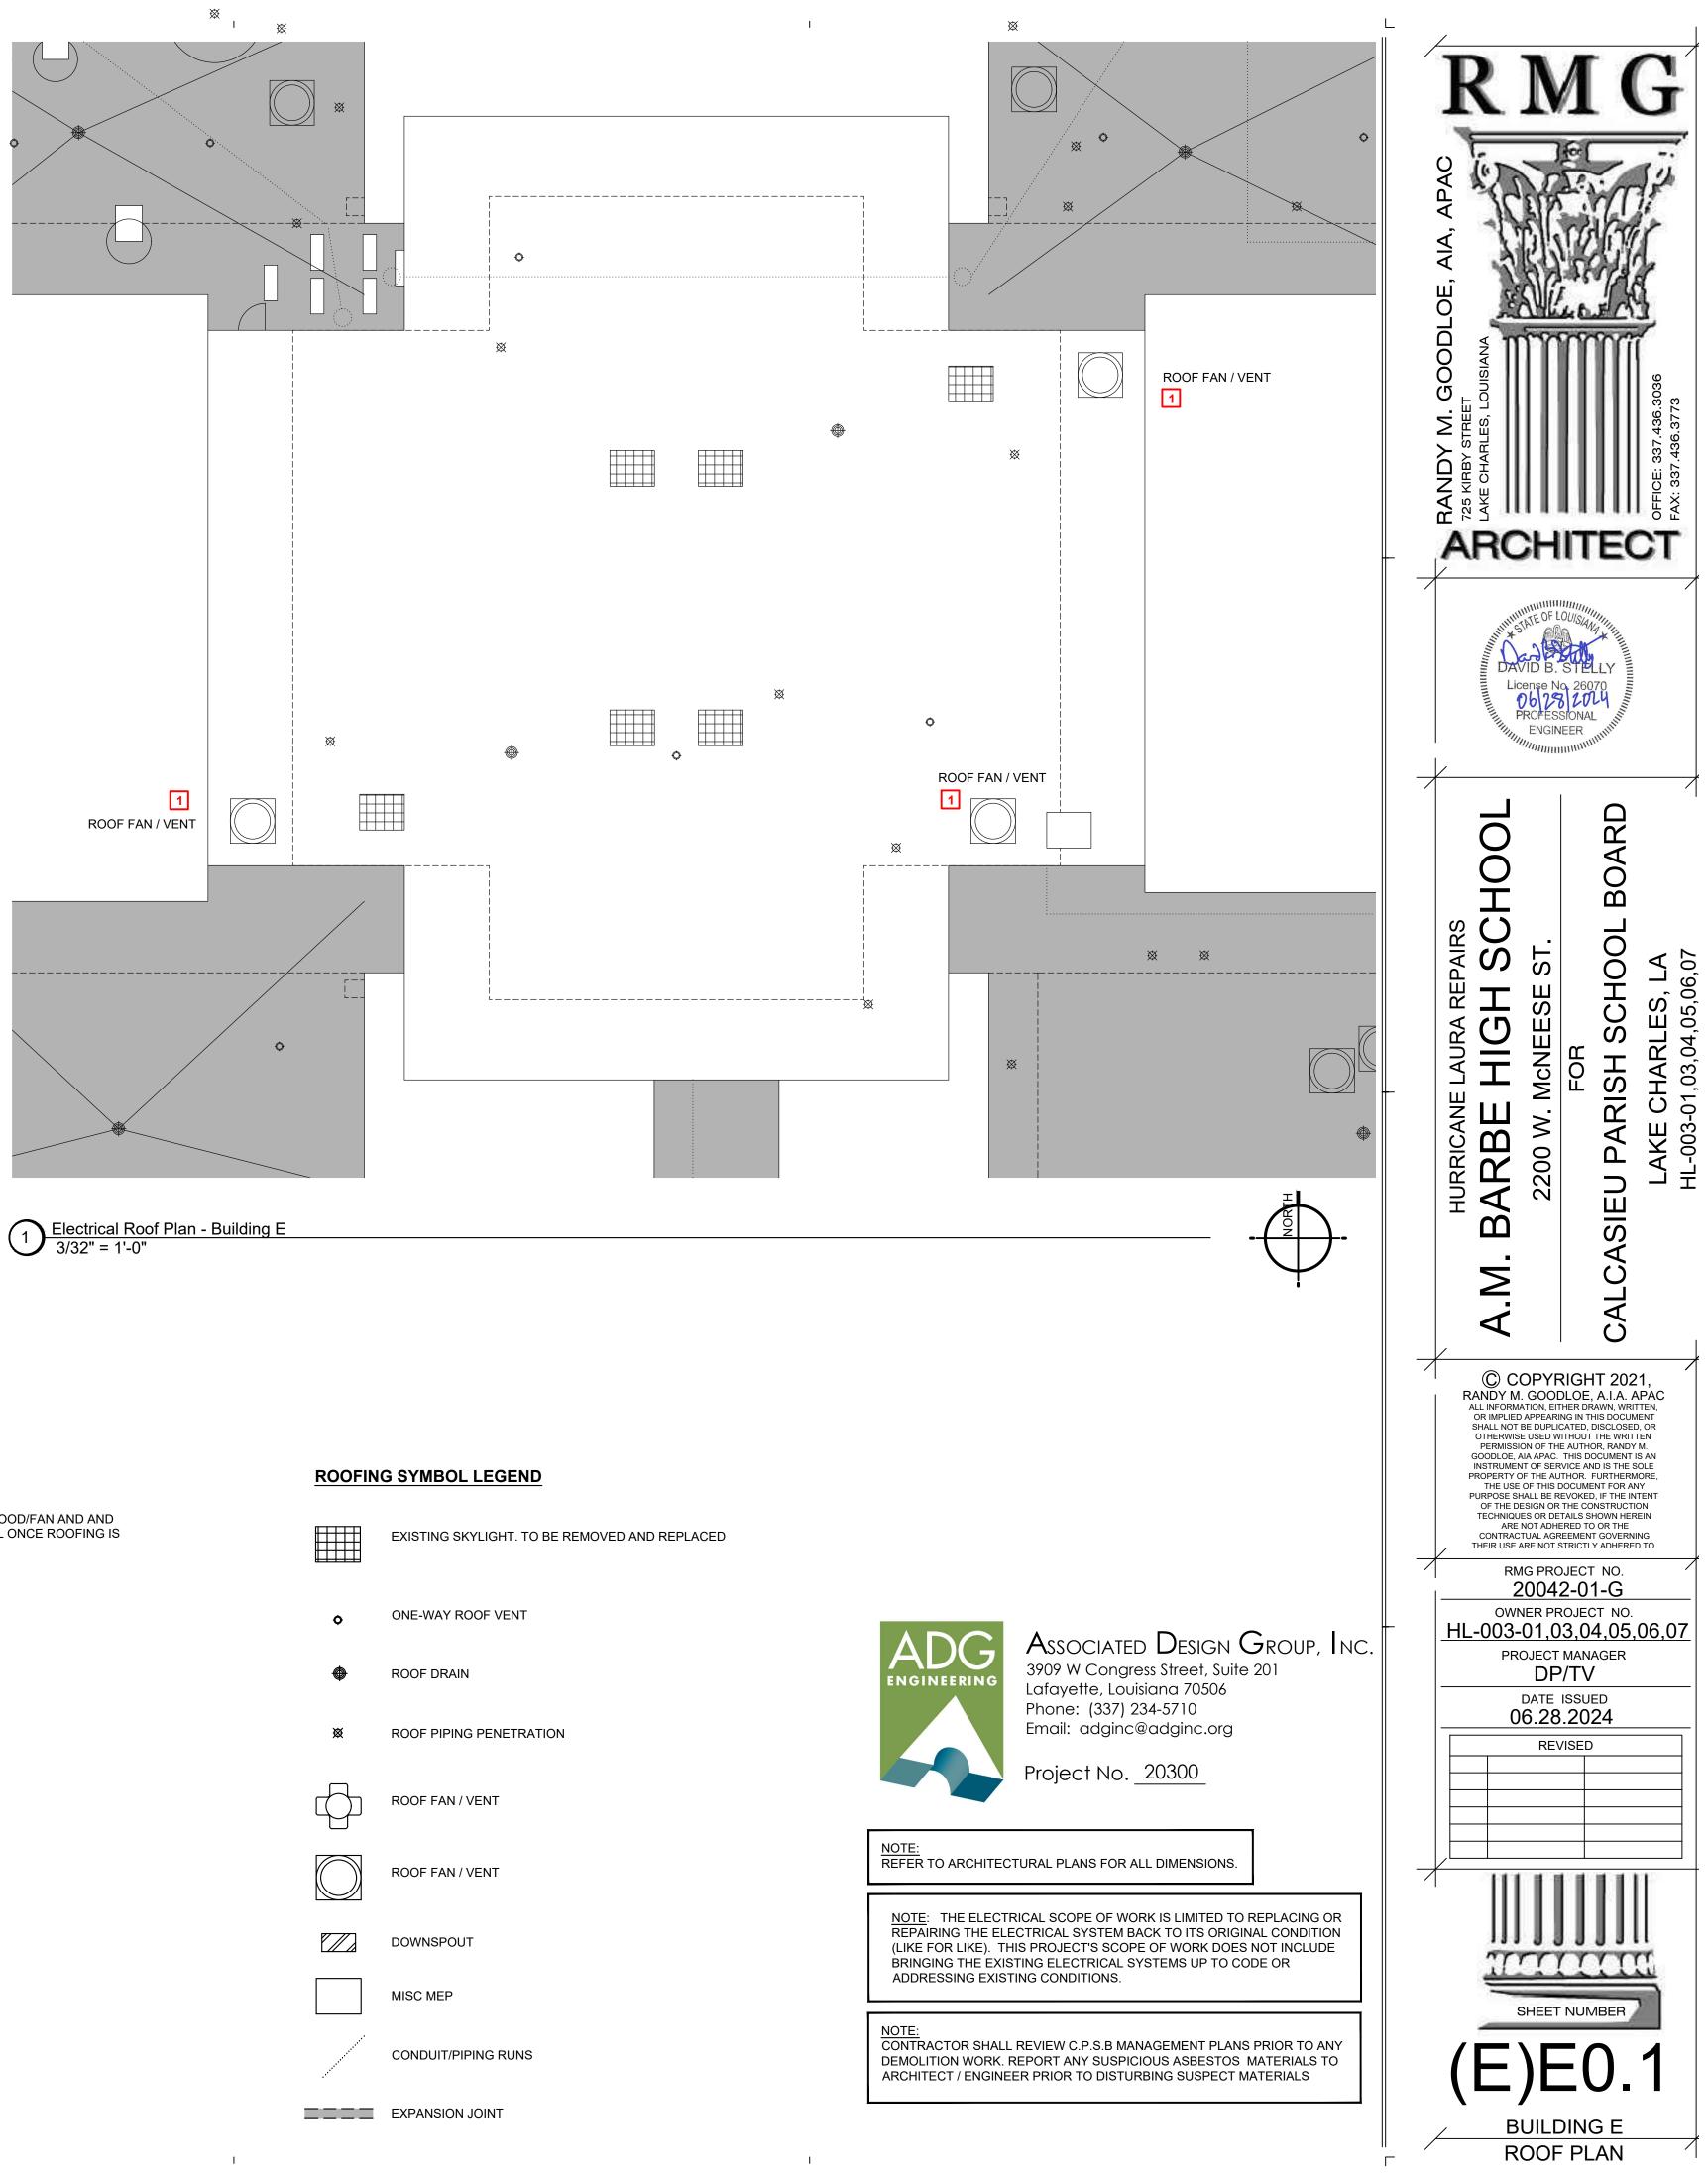



KEYNOTES TO SHEET:

I.

1. CONTRACTOR SHALL REMOVE EXISTING ROOF MOUNTED HOOD/FAN AND AND INSTALL ON NEW CURB. RECONNECT EXISTING ELECTRICAL ONCE ROOFING IS COMPLETE.

	EXISTING SKYLIGHT. TO BE REMOVED AND REPLA
٥	ONE-WAY ROOF VENT
۲	ROOF DRAIN
∞	ROOF PIPING PENETRATION
	ROOF FAN / VENT
\bigcirc	ROOF FAN / VENT
	DOWNSPOUT
	MISC MEP
	CONDUIT/PIPING RUNS
	EXPANSION JOINT

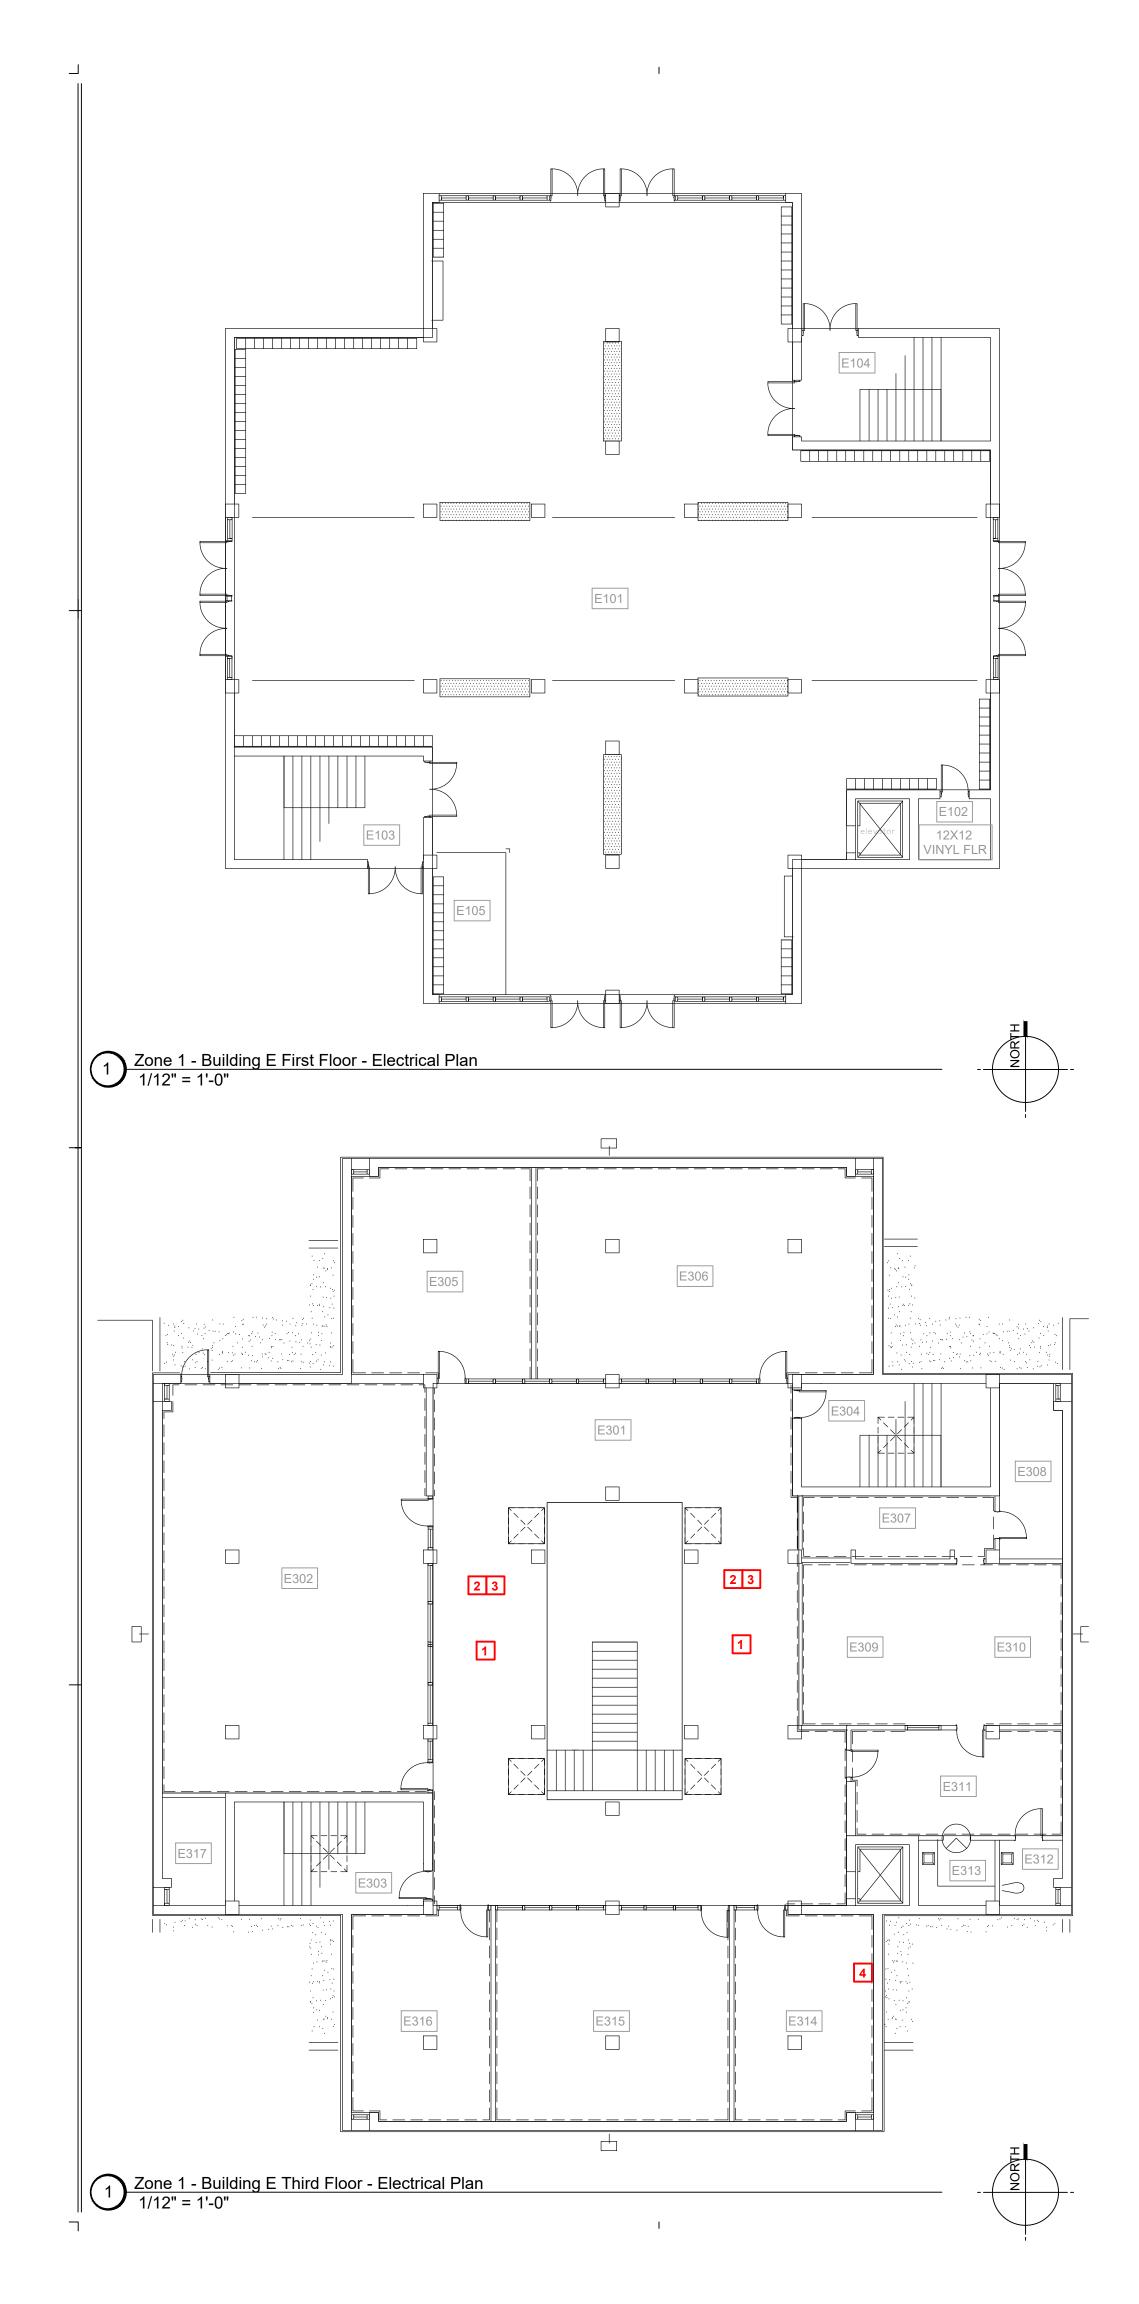

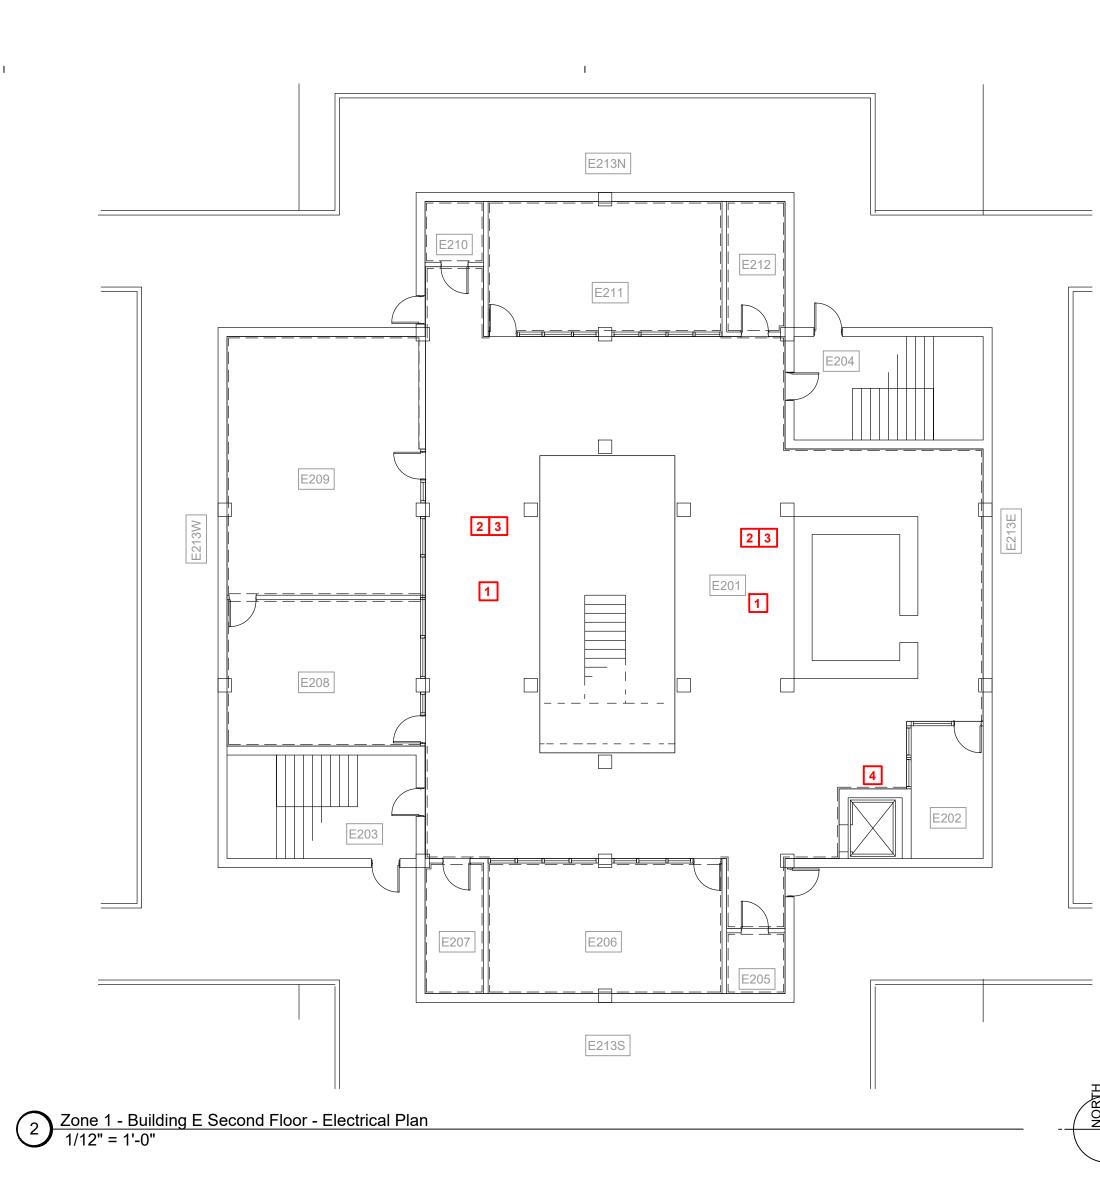

1

GENERAL NOTES:

- A. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR TO ORDERING LIGHT FIXTURES.
- B. THE INTENT OF THE PLAN IS FOR EXISTING CIRCUITING TO REMAIN AND BE RE-USED. ALL EXISTING POWER WIRING SHALL BE PROTECTED DURING DEMOLITON AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- D. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF THE 2020 EDITION OF NEC.
- E. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.
- F. EXISTING LIGHTING THROUGHOUT THE BUIDING HAS BEEN REPLACED BY THE OWNER IN A PREVIOUS PROJECT. IF THERE ARE SPACES WHERE THE DRAWINGS REQUIRE CEILING REPLACEMENT, THE CONTRACTOR WILL BE REQUIRED TO REMOVE THE EXISTING FIXTURES, PROPERLY STORE THEM ONSITE (CONTAINER OR OTHER OWNER APPROVED AREA), THEN RE-INSTALL FOLLOWING REPLACEMENT OF CEILINGS WITHIN A GIVEN SPACE.
- G. ALL EXISTING LOW VOLTAGE WIRING SHALL BE PROTECTED DURING DEMOLITION AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.

KEYNOTES:

- 1. ANY EXISTING CAMERAS OR WIRELESS ACCESS POINTS TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH CPSB IT DEPARTMENT. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED COMMUNICATIONS CABLING.
- 2. ANY EXISTING FIRE ALARM DEVICES TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH SYLVAN SOUND. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED FIRE ALARM WIRING.
- 3. ANY EXISTING INTERCOM DEVICES TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH SYLVAN SOUND. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED INTERCOM WIRING.
- 4. EXISTING LOCATION OF IT RACK. CONTRACTOR IS RESPONSIBLE FOR PROTECTING IT RACK, EQUIPMENT, AND WIRING DURING CONSTRUCTION. IT RACK SHALL REMAIN OPERATIONAL THROUGHOUT CONSTRUCTION UNLESS APPROVED BY CPSB IT FOR IT TO BE POWERED DOWN. PROVIDE COVER FOR RACK TO MINIMIZE DUST AND DEBRIS WHILE AT THE SAME TIME ALLOWING COOLING AND PROPER AIRFLOW.

NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS


NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.


NOTE: THE ELECTRICAL SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE ELECTRICAL SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE). THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING THE EXISTING ELECTRICAL SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS.



Associated Design G_{ROUP} , Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org


Project No. 20300

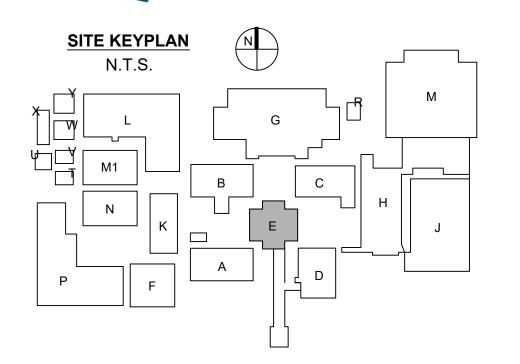

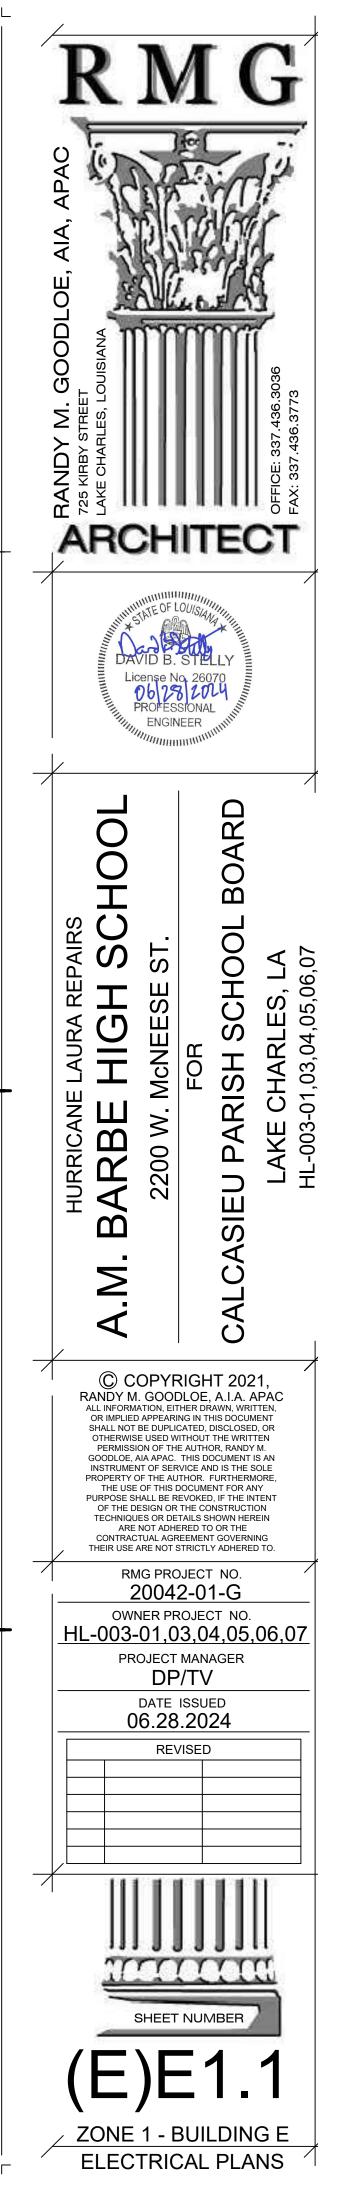

I.

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

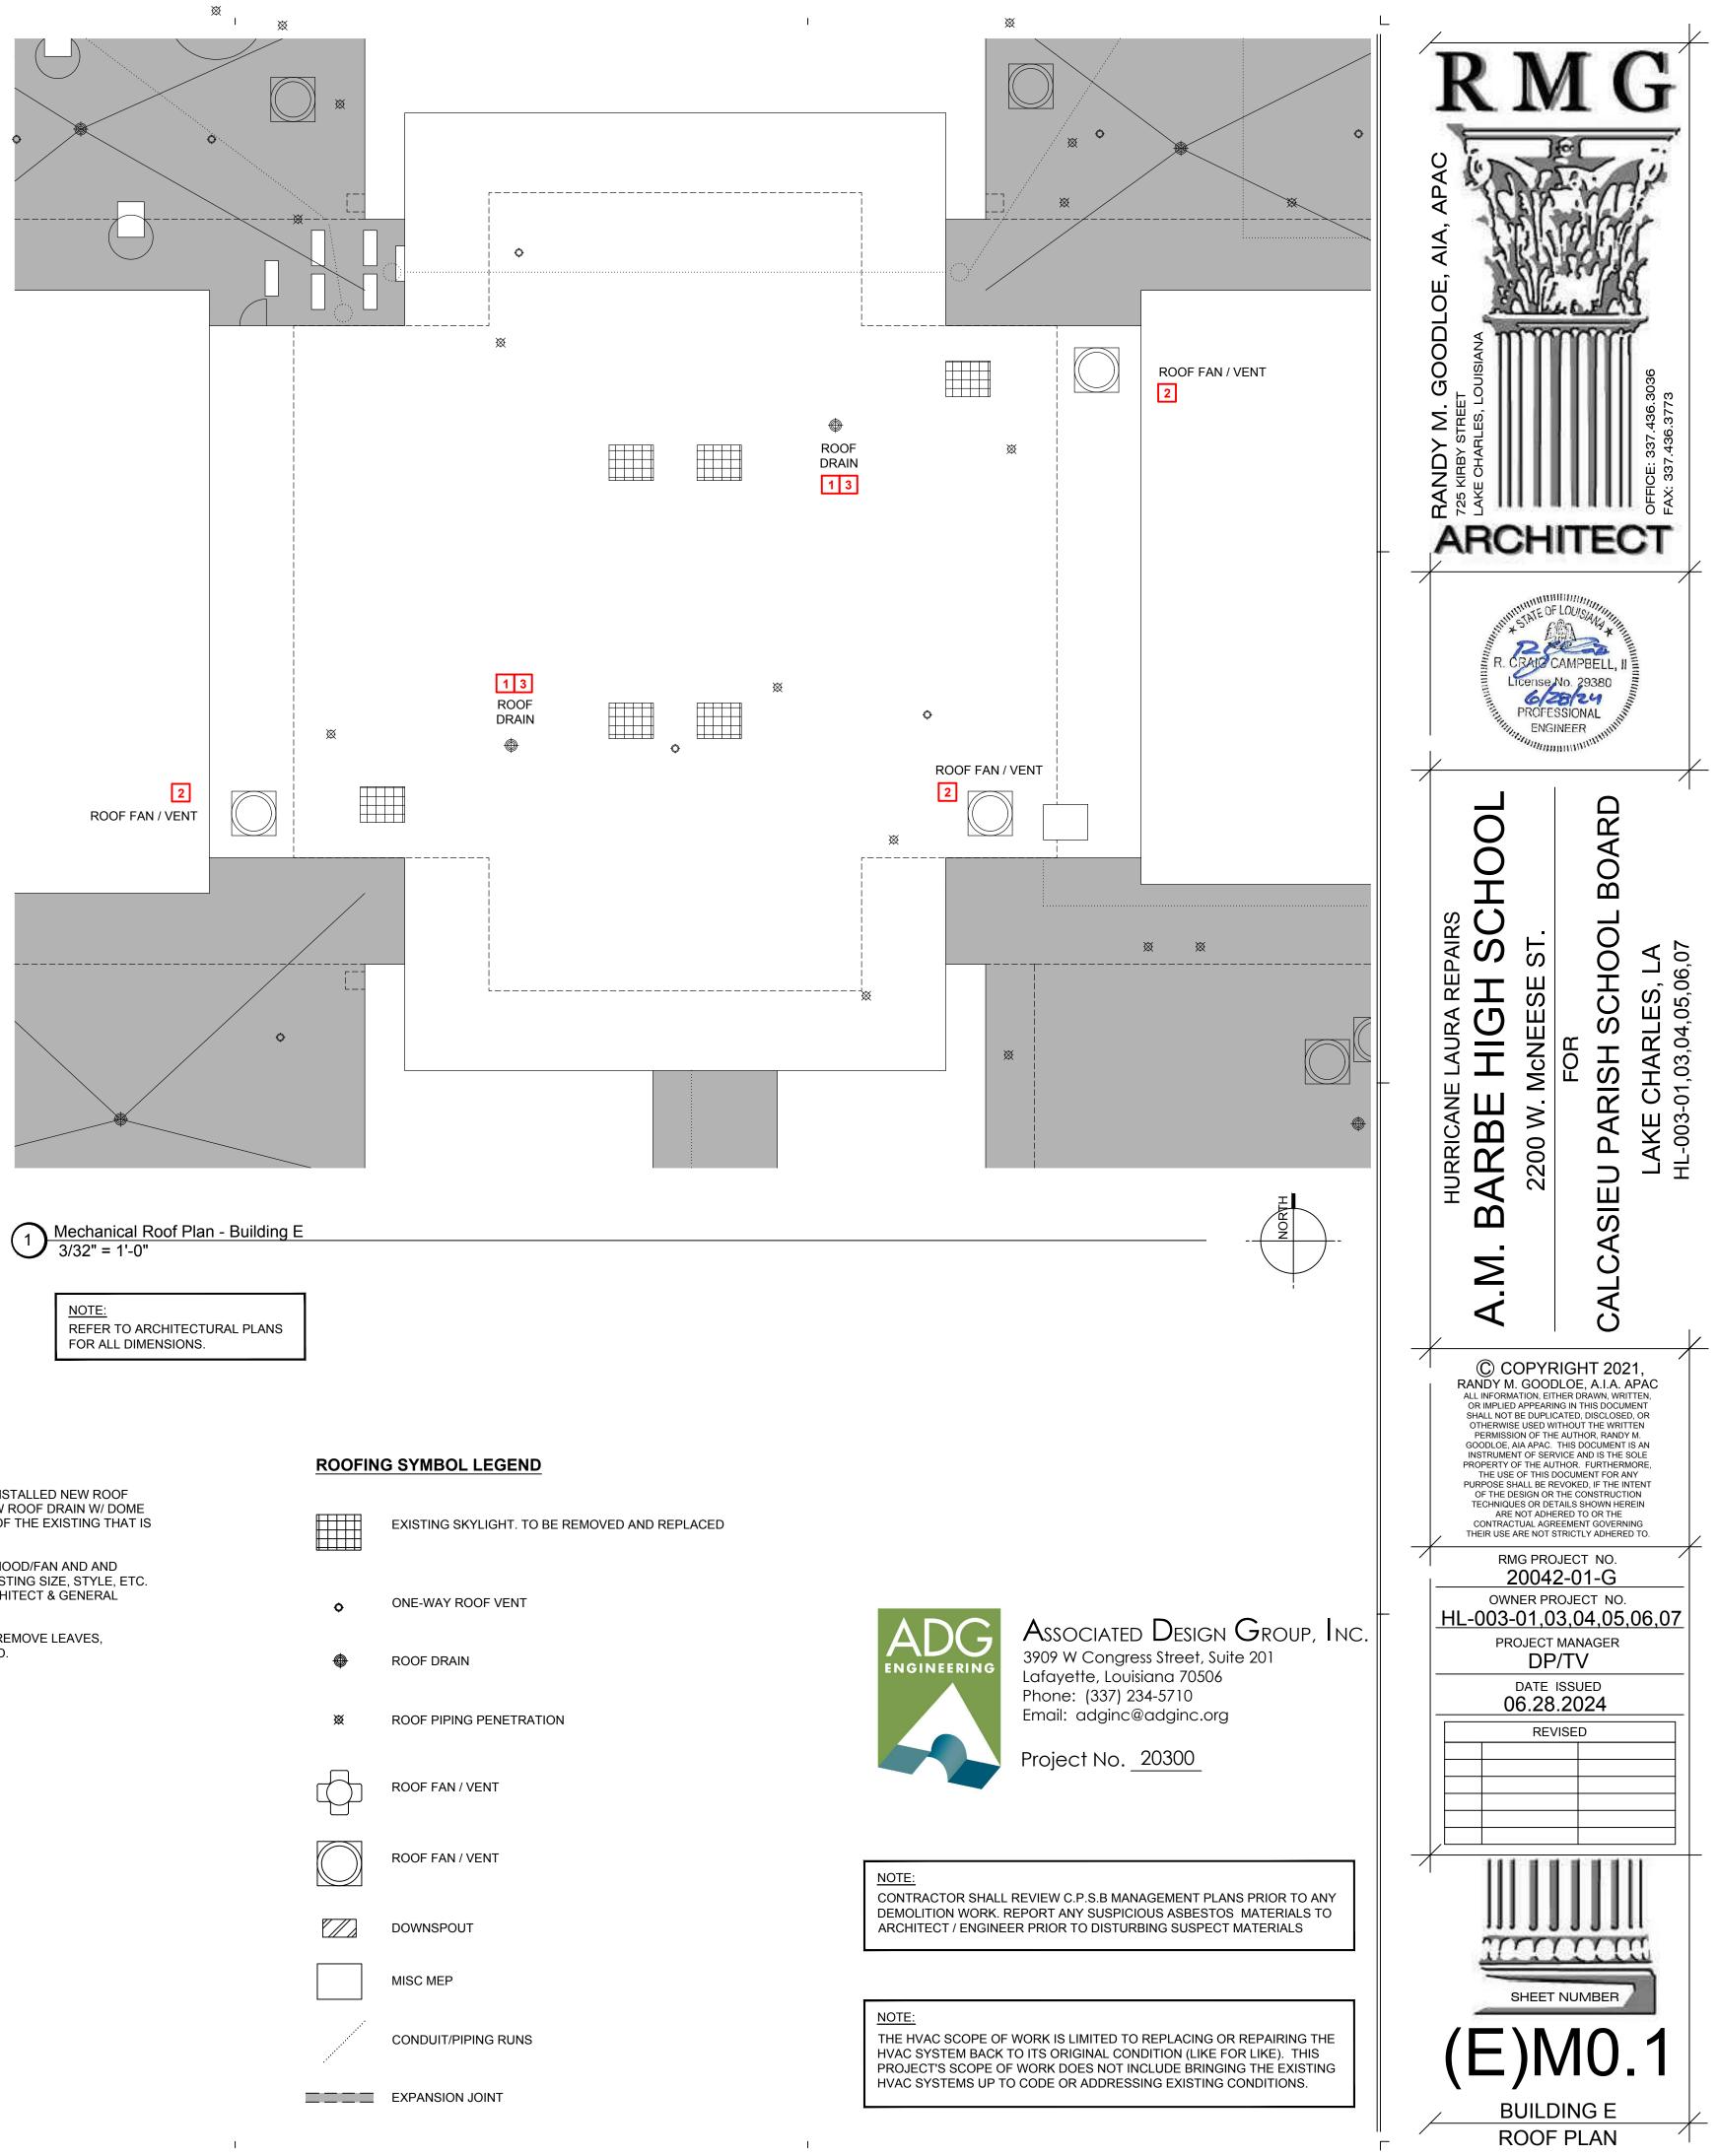



KEYNOTES TO SHEET:

1

- 1. CONTRACTOR SHALL REMOVE EXISTING ROOF DRAIN AN INSTALLED NEW ROOF DRAIN WITH DOME STRAINER IN SAME LOCATION. THE NEW ROOF DRAIN W/ DOME STRAINER SHALL MATCH THE EXISTING SIZE, STYLE, ETC. OF THE EXISTING THAT IS BEING REPLACED AS PART OF THE RE-ROOFING PROJECT.
- 2. CONTRACTOR SHALL REMOVE EXISTING ROOF MOUNTED HOOD/FAN AND AND INSTALL ON NEW CURB. NEW CURB SHALL MATCH THE EXISTING SIZE, STYLE, ETC. OF EXISTING CURB. COORDINATE CURB HEIGHT WITH ARCHITECT & GENERAL CONTRACTOR PRIOR ORDERING.
- 3. ALL EXISTING ROOF DRAIN PIPING SHALL BE FLUSHED TO REMOVE LEAVES, DEBRIS, ETC. ONCE THE NEW ROOF DRAINS ARE INSTALLED.

	EXISTING SKYLIGHT. TO BE REMOVED AND REPL
¢	ONE-WAY ROOF VENT
۲	ROOF DRAIN
※	ROOF PIPING PENETRATION
	ROOF FAN / VENT
\bigcirc	ROOF FAN / VENT
	DOWNSPOUT
	MISC MEP
	CONDUIT/PIPING RUNS

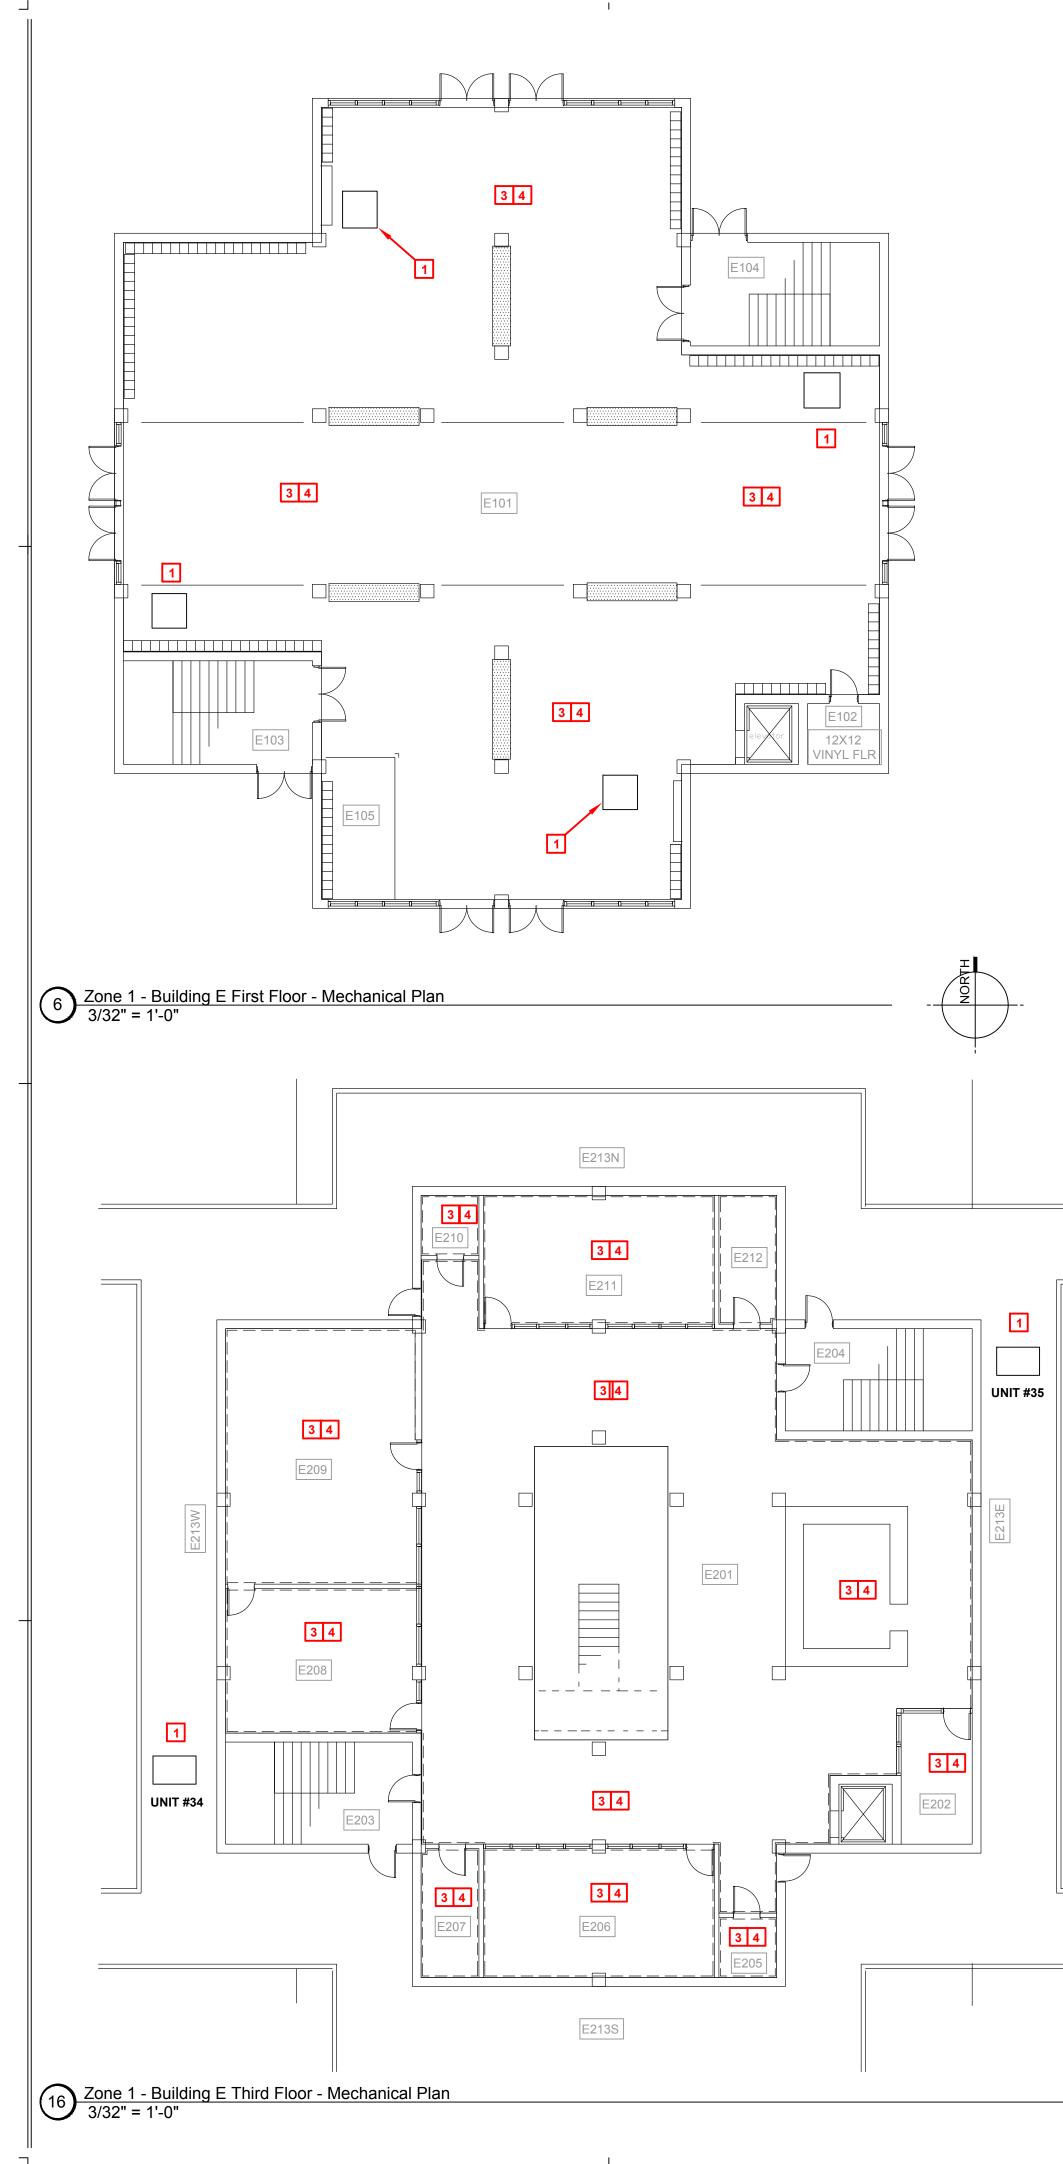

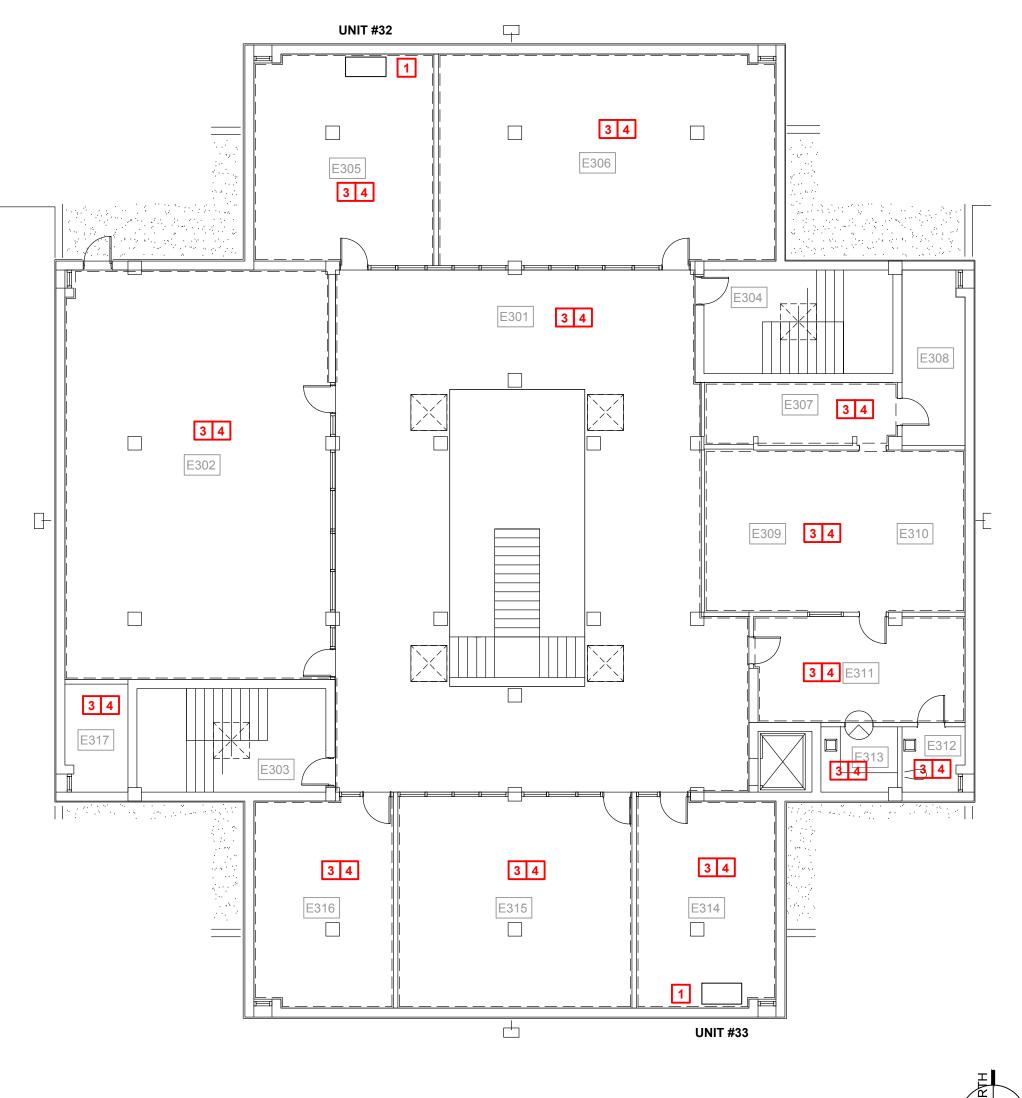

8 Zone 1 - Building E Second Floor - Mechanical Plan 3/32" = 1'-0"

<u>NOTE:</u> REFER TO ARCHITECTURAL DRAWINGS FOR ALL DIMENSIONS.

GENERAL NOTES:

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B., CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

KEYNOTES TO SHEET:

- 1. EXISTING FAN COIL UNIT TO REMAIN AND CLEANED PER THE SPECIFICATIONS. REMOVE AND REPLACE EXISTING AIR HANDLING UNIT INTERIOR LINER AND CLEAN INTERIOR OF UNIT INCLUDING COILS.
- 2. EXISTING AIR HANDLING UNIT TO REMAIN AND CLEANED PER THE SPECIFICATIONS. REMOVE AND REPLACE EXISTING AIR HANDLING UNIT INTERIOR LINER AND CLEAN INTERIOR OF UNIT INCLUDING COILS.
- 3. NO INTERIOR MECHANICAL (PLUMBING & HVAC) WORK ASSOCIATED WITH THESE SPACES WITHIN THE BUILDING.
- 4. CONTRACTOR SHALL TEMPORARILY SUPPORT AND PROTECT ANY EQUIPMENT, DIFFUSERS, GRILLES, ETC. IN OR ABOVE CEILINGS OF THESE SPACES DURING THE REMOVAL AND INSTALLATION OF NEW CEILINGS. REFER TO ARCHITECTURAL PLANS FOR THOSE LOCATIONS.



NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS


NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.


<u>NOTE:</u> THE HVAC SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE HVAC SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE) IN MOST CIRCUMSTANCES. THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING ALL THE EXISTING HVAC SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS. ALTHOUGH ALL WORK MUST COMPLY WITH FEMA CONSENSUS-BASED, "LATEST PUBLISHED EDITIONS" OF CODES NOT NECESSARILY THOSE CODES ADOPTED BY THE LOCAL MUNICIPALITY.



Associated Design G_{ROUP} , Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

Project No. 20300

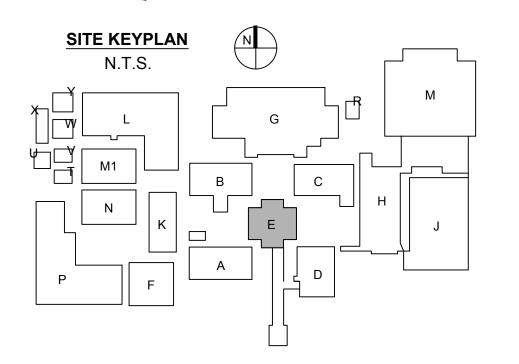


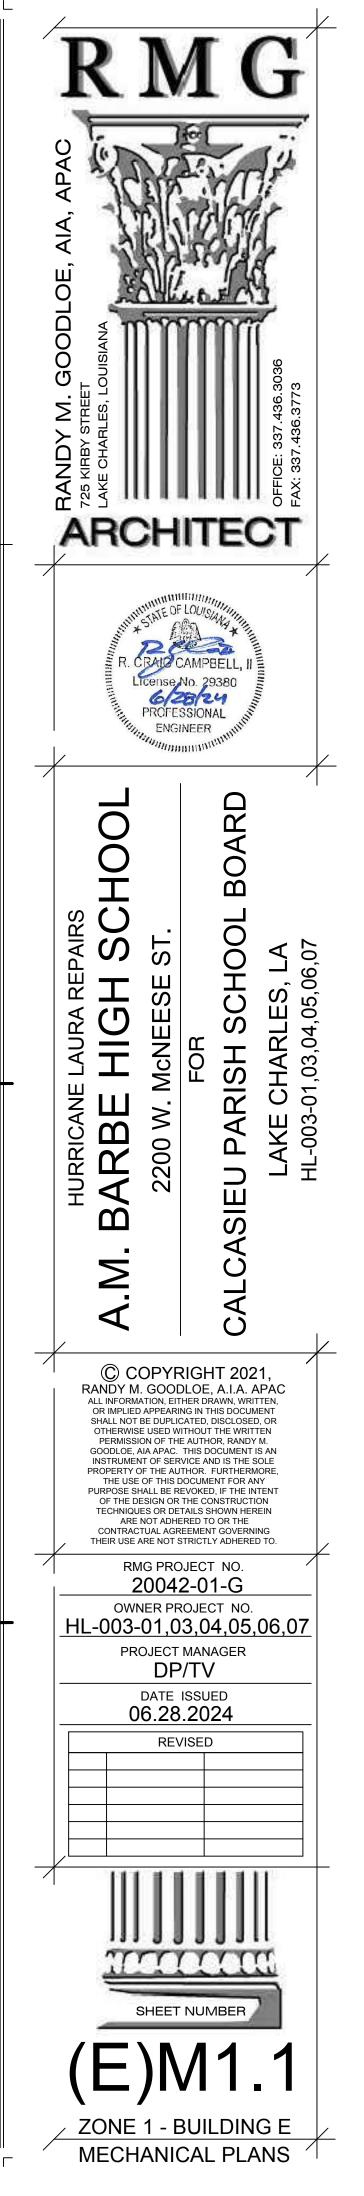


I

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING ELECTRICAL EQUIPMENT SIZES IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR ORDERING NEW EQUIPMENT.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.

1

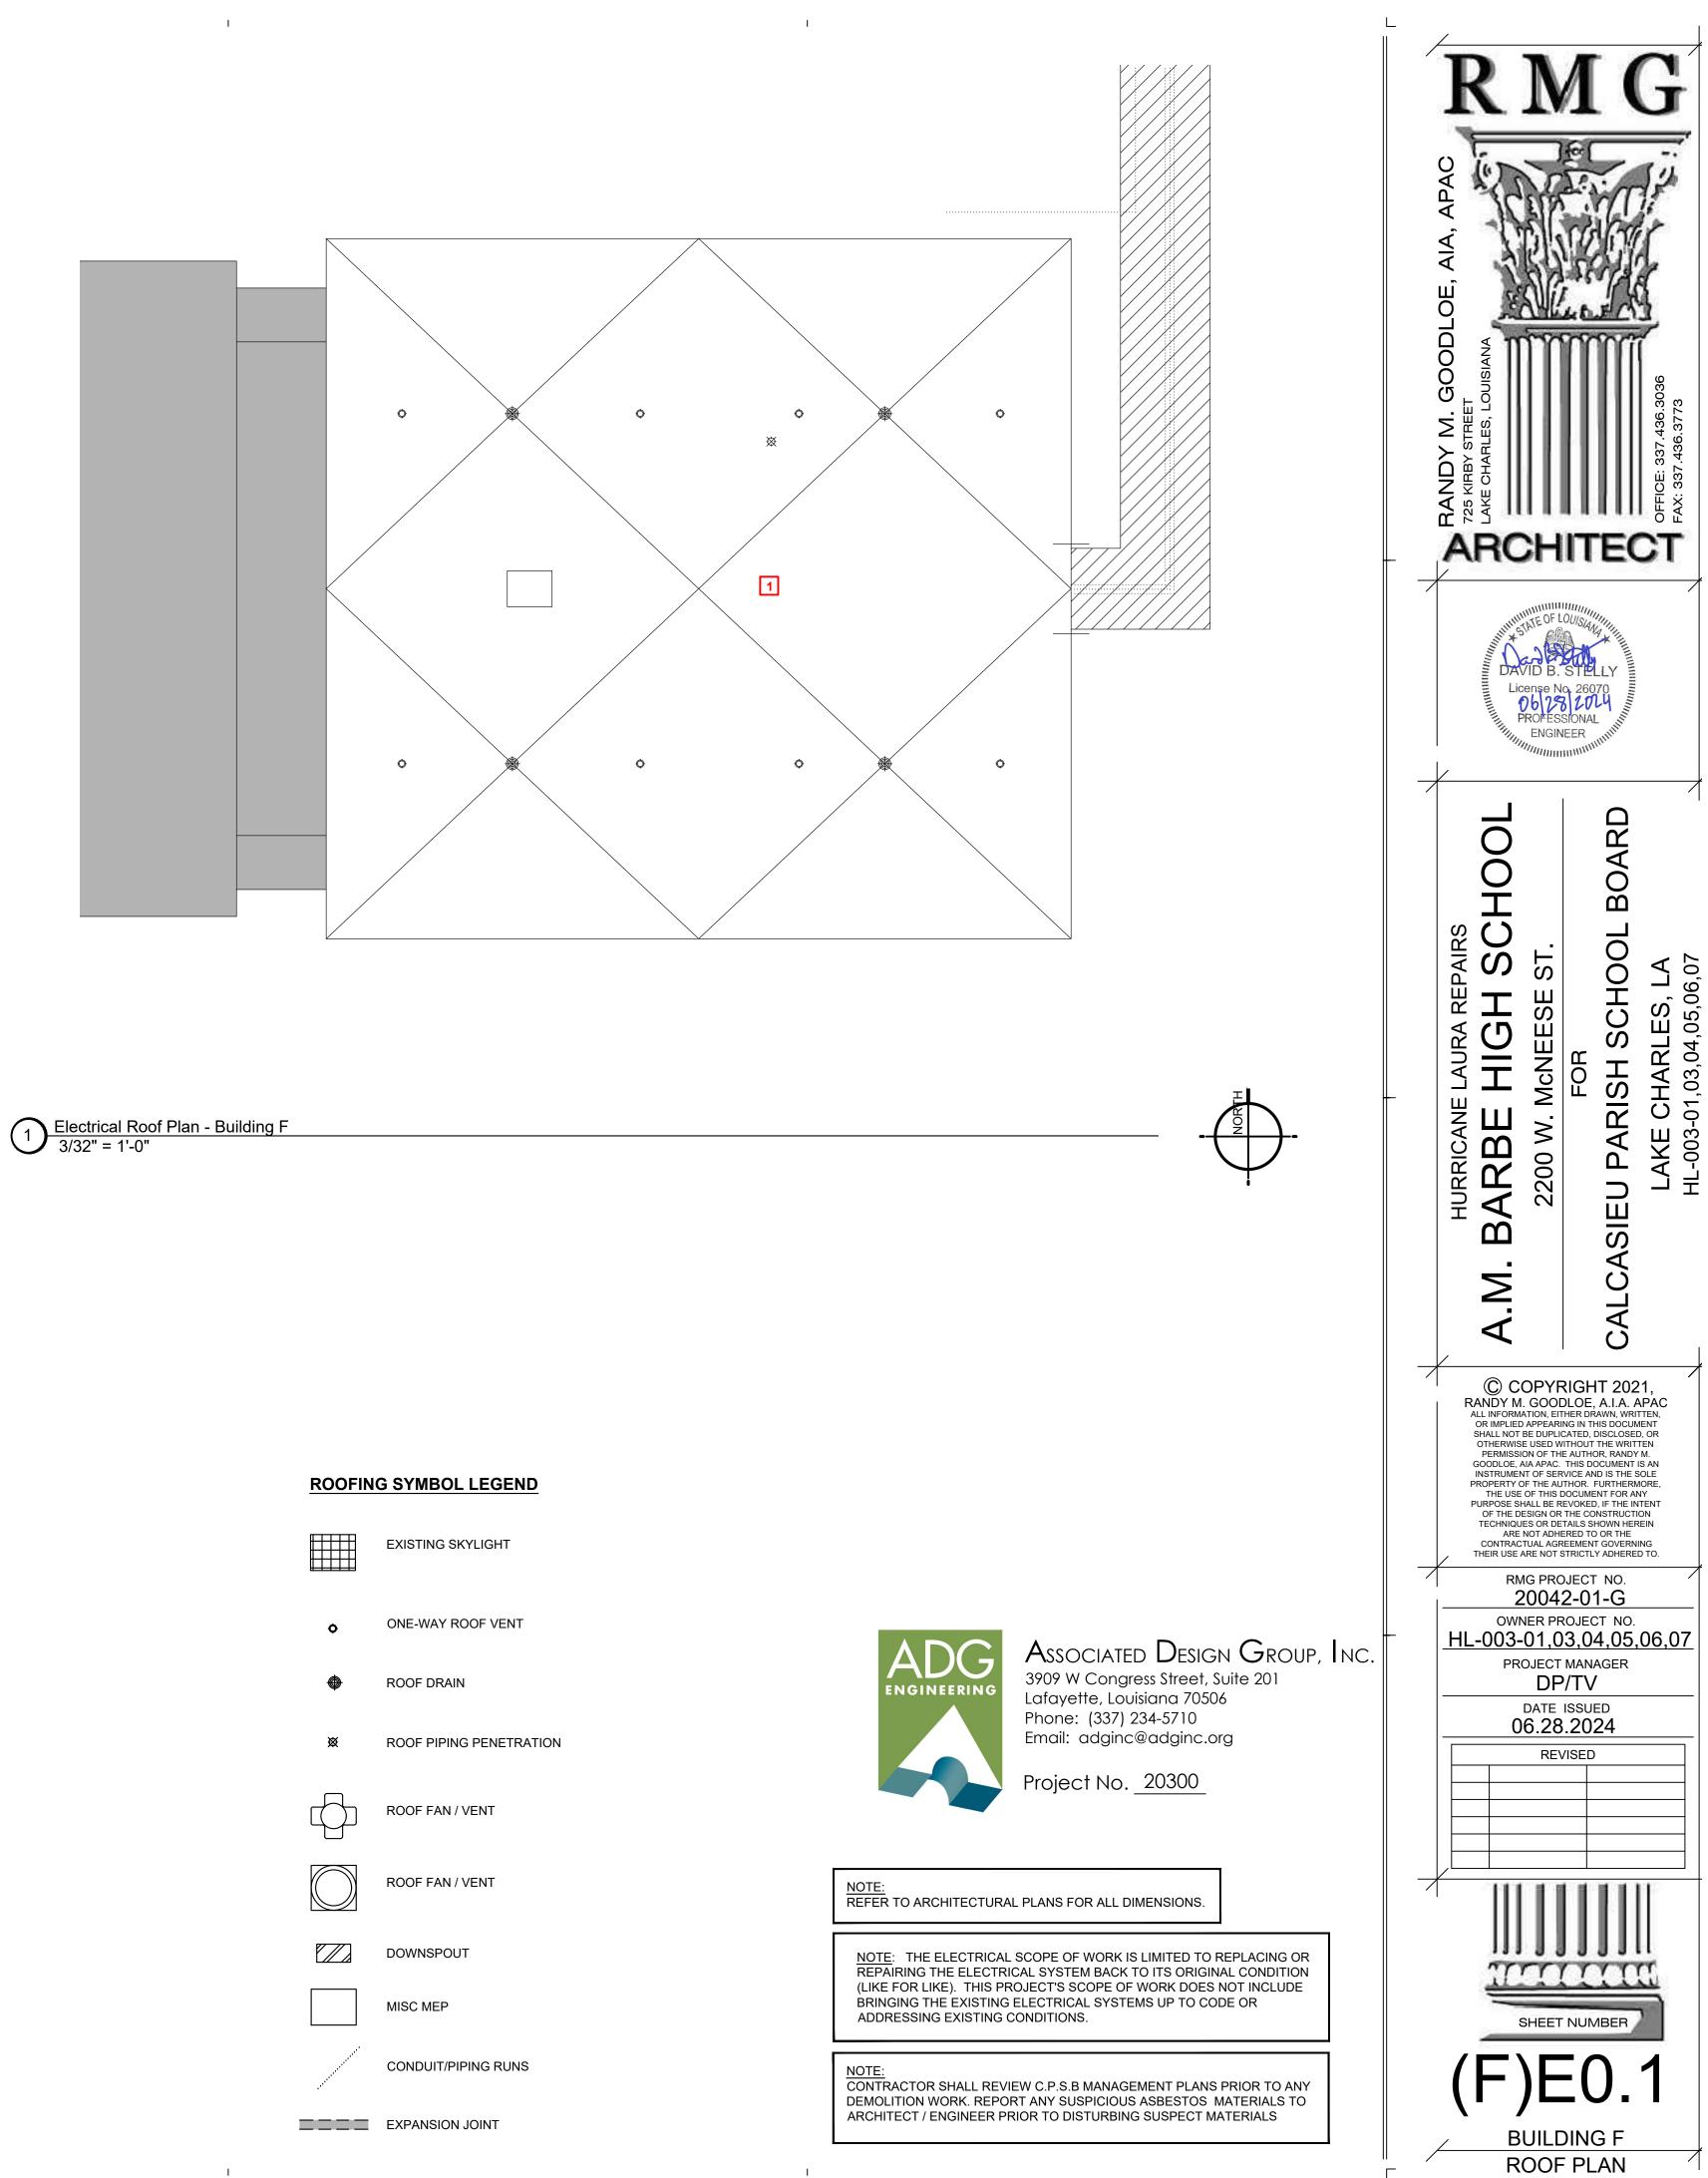




KEYNOTES TO SHEET:

1. NO ELECTRICAL WORK ASSOCIATED WITH THIS ROOF.

I.

I

	EXISTING SKYLIGHT
¢	ONE-WAY ROOF VENT
۲	ROOF DRAIN
斑	ROOF PIPING PENETRATIO
	ROOF FAN / VENT
\bigcirc	ROOF FAN / VENT
	DOWNSPOUT
	MISC MEP
	CONDUIT/PIPING RUNS

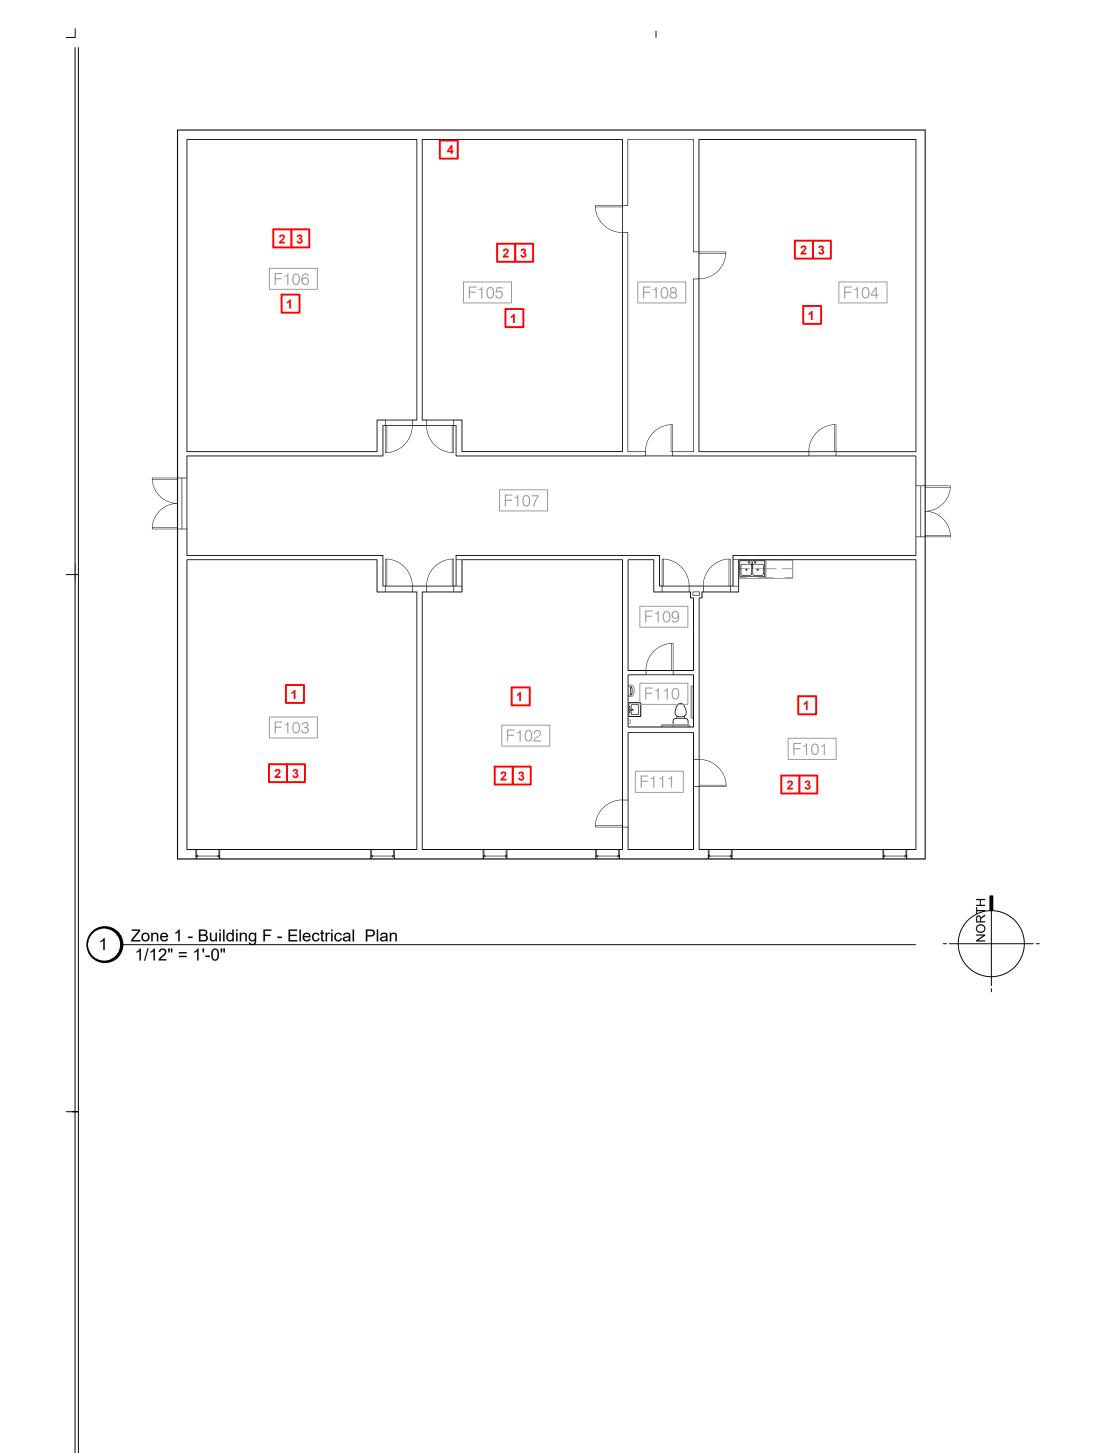

GENERAL NOTES:

1

1

A. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR TO ORDERING LIGHT FIXTURES.

I.

- B. THE INTENT OF THE PLAN IS FOR EXISTING CIRCUITING TO REMAIN AND BE RE-USED. ALL EXISTING POWER WIRING SHALL BE PROTECTED DURING DEMOLITON AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- D. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF THE 2020 EDITION OF NEC.
- . PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.
- F. EXISTING LIGHTING THROUGHOUT THE BUIDING HAS BEEN REPLACED BY THE OWNER IN A PREVIOUS PROJECT. IF THERE ARE SPACES WHERE THE DRAWINGS REQUIRE CEILING REPLACEMENT. THE CONTRACTOR WILL BE REQUIRED TO REMOVE THE EXISTING FIXTURES, PROPERLY STORE THEM ONSITE (CONTAINER OR OTHER OWNER APPROVED AREA), THEN RE-INSTALL FOLLOWING REPLACEMENT OF CEILINGS WITHIN A GIVEN SPACE.
- G. ALL EXISTING LOW VOLTAGE WIRING SHALL BE PROTECTED DURING DEMOLITION AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.

1

KEYNOTES:

1

1. ANY EXISTING CAMERAS OR WIRELESS ACCESS POINTS TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH CPSB IT DEPARTMENT. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED COMMUNICATIONS CABLING.

2. ANY EXISTING FIRE ALARM DEVICES TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH SYLVAN SOUND. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED FIRE ALARM WIRING.

3. ANY EXISTING INTERCOM DEVICES TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH SYLVAN SOUND. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED INTERCOM WIRING.

4. EXISTING LOCATION OF IT RACK. CONTRACTOR IS RESPONSIBLE FOR PROTECTING IT RACK, EQUIPMENT, AND WIRING DURING CONSTRUCTION. IT RACK SHALL REMAIN OPERATIONAL THROUGHOUT CONSTRUCTION UNLESS APPROVED BY CPSB IT FOR IT TO BE POWERED DOWN. PROVIDE COVER FOR RACK TO MINIMIZE DUST AND DEBRIS WHILE AT THE SAME TIME ALLOWING COOLING AND PROPER AIRFLOW.

> NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK, REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS


NDTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.


NOTE: THE ELECTRICAL SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE ELECTRICAL SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE). THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING THE EXISTING ELECTRICAL SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS.



Associated Design Group, Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

Project No. 20300

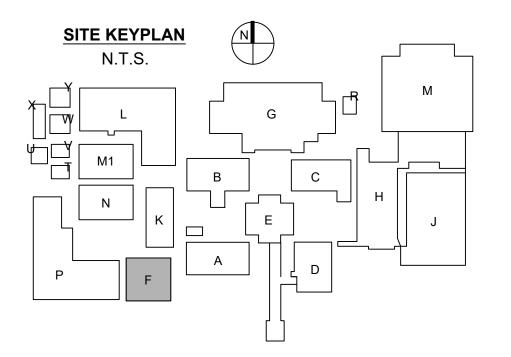


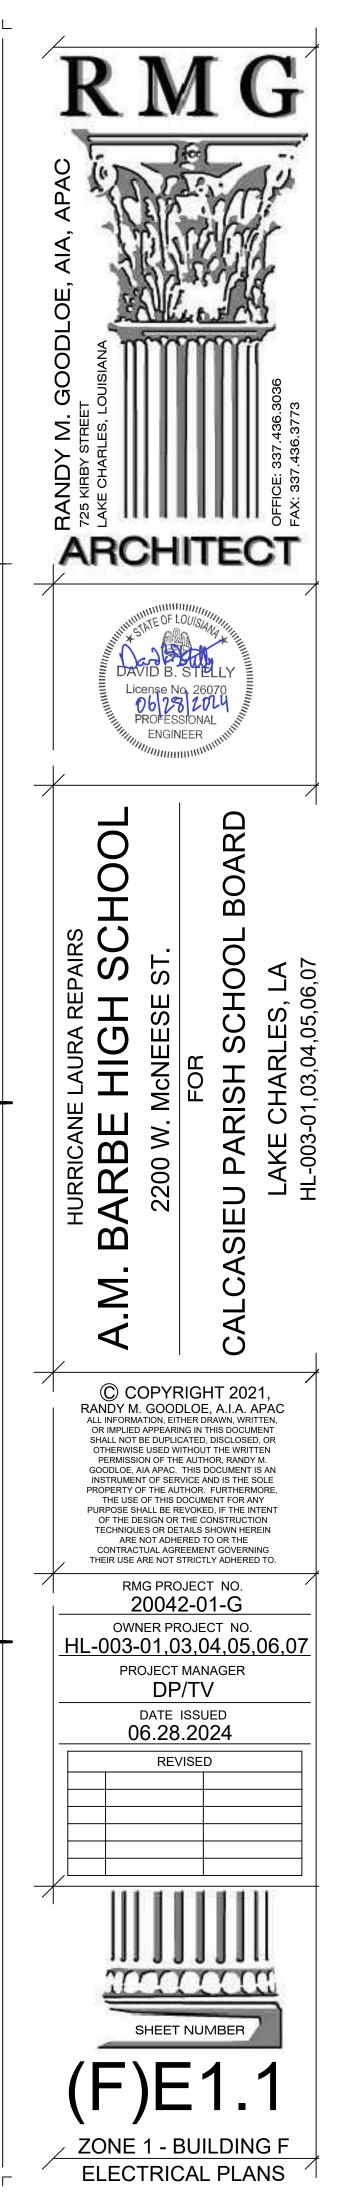

I

Ι

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

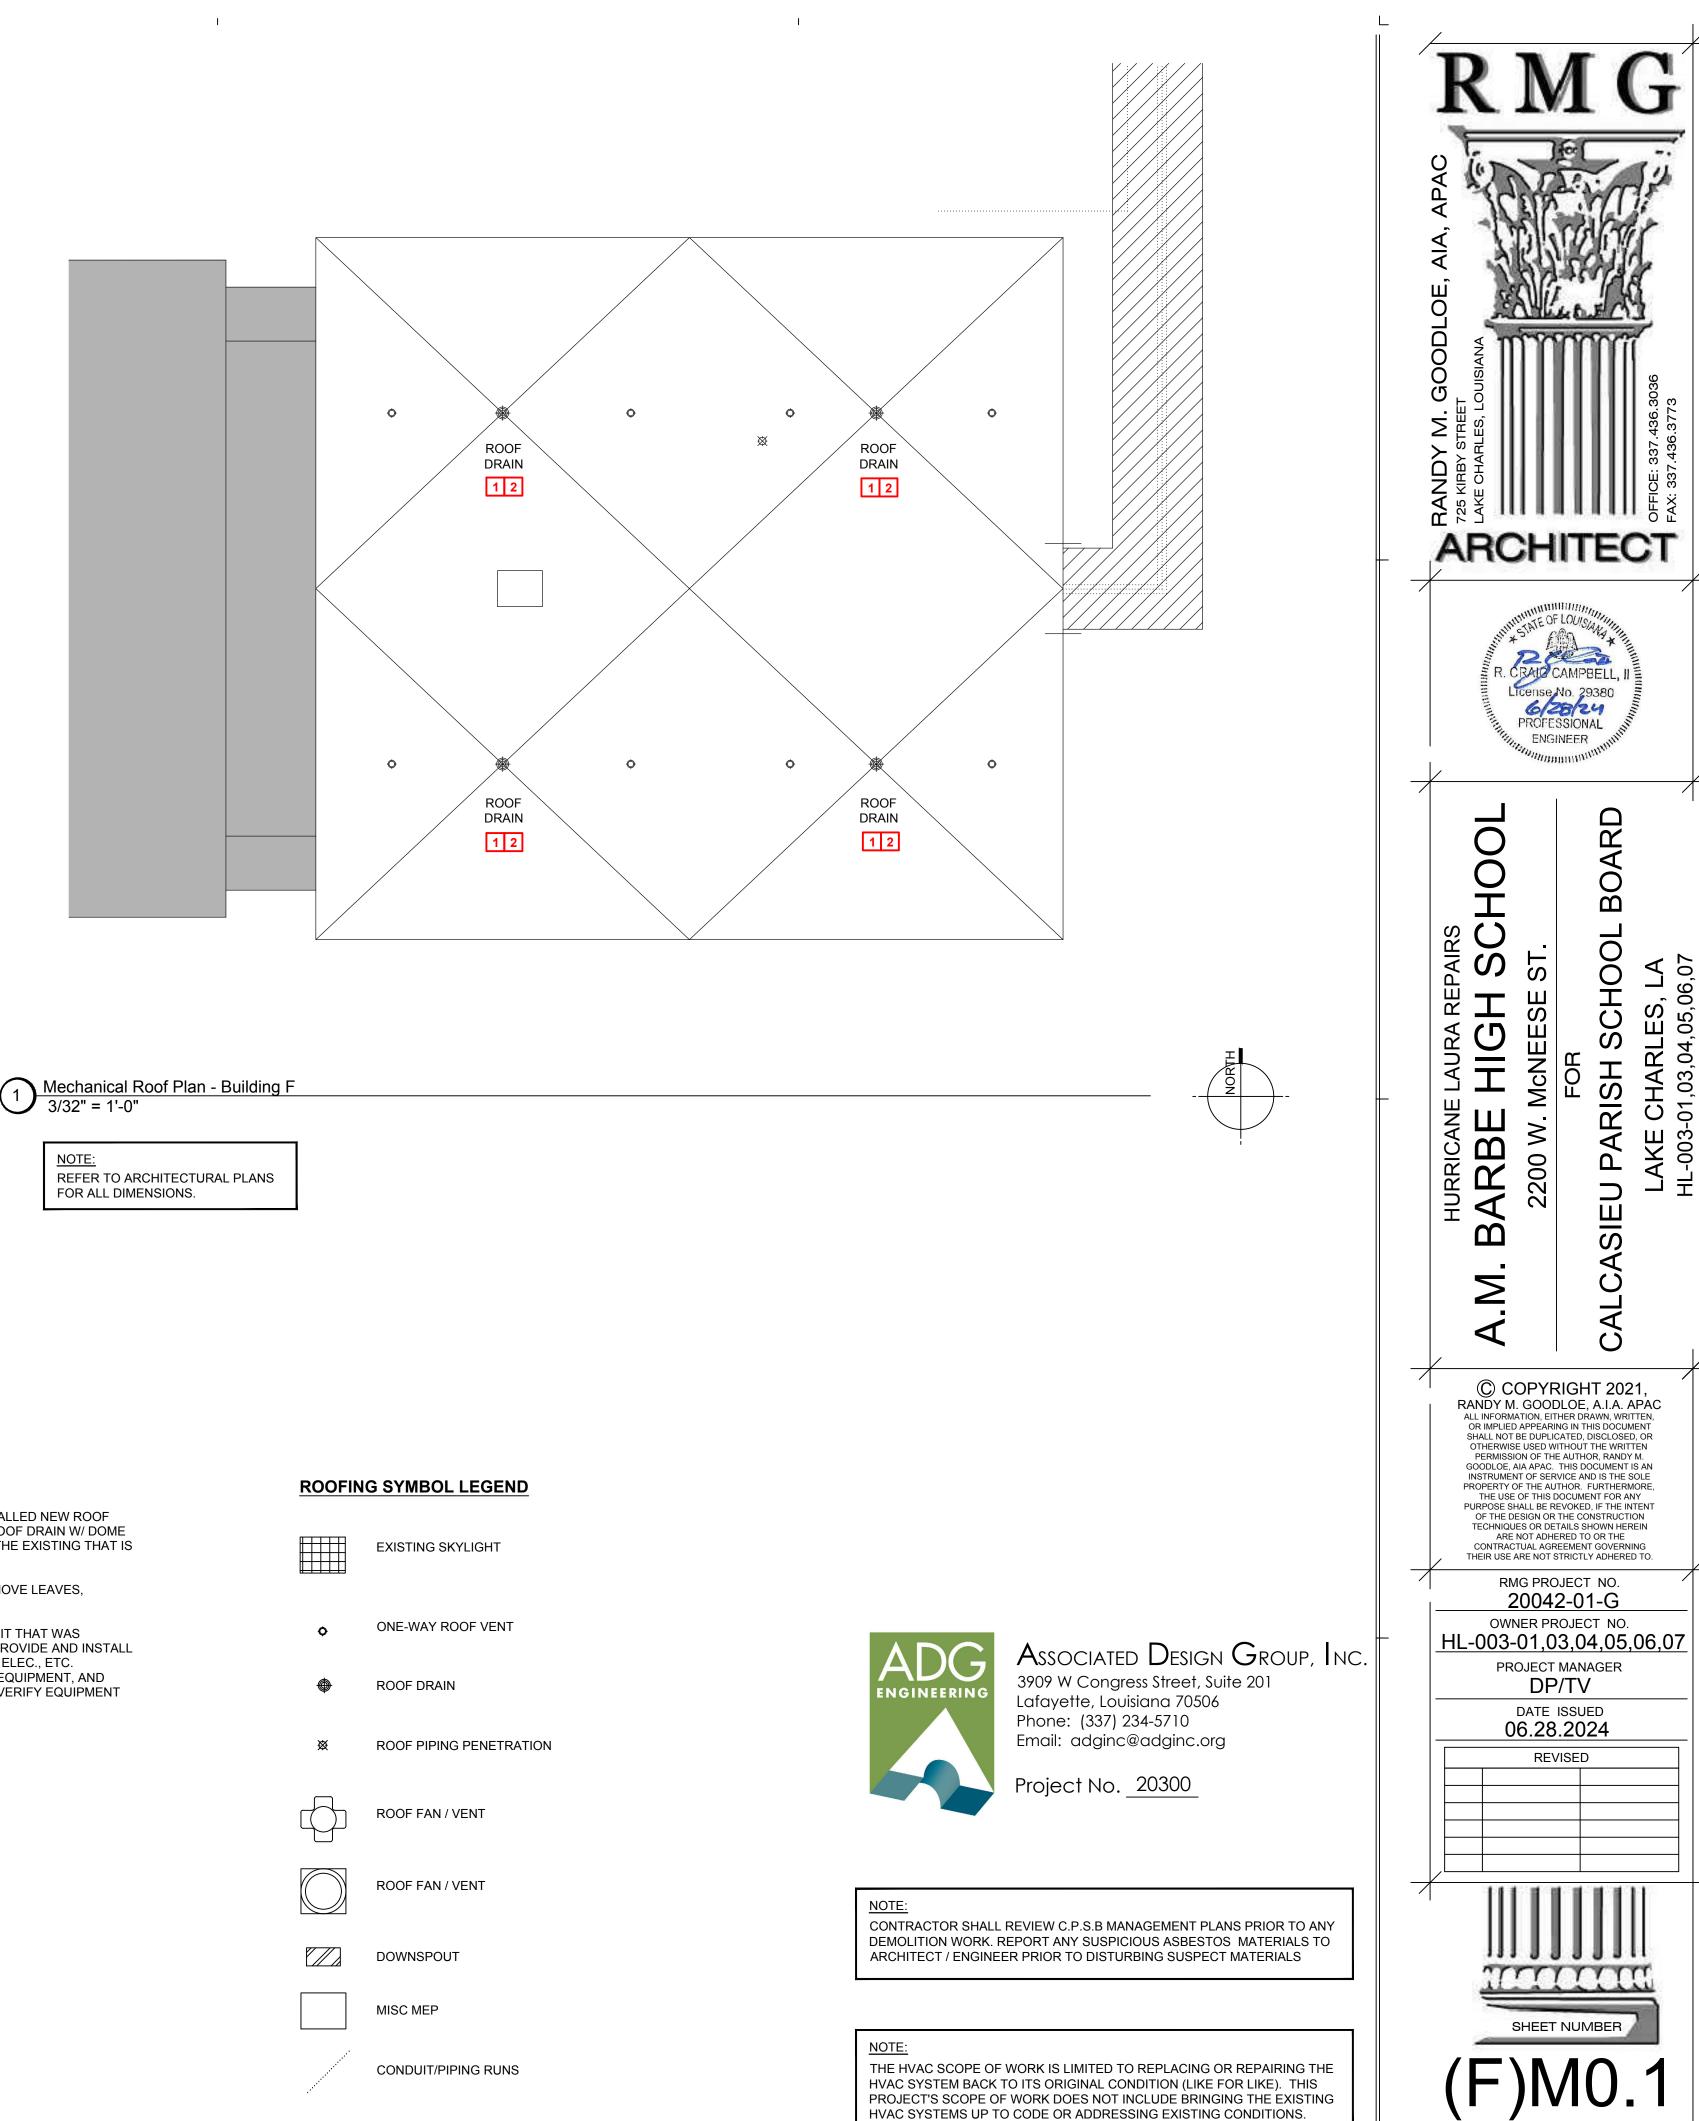

<u>NOTE</u> REFER TO ARCHITECTURAL PLANS FOR ALL DIMENSIONS.

KEYNOTES TO SHEET:

1

I.

- 1. CONTRACTOR SHALL REMOVE EXISTING ROOF DRAIN AN INSTALLED NEW ROOF DRAIN WITH DOME STRAINER IN SAME LOCATION. THE NEW ROOF DRAIN W/ DOME STRAINER SHALL MATCH THE EXISTING SIZE, STYLE, ETC. OF THE EXISTING THAT IS BEING REPLACED AS PART OF THE RE-ROOFING PROJECT. 2. ALL EXISTING ROOF DRAIN PIPING SHALL BE FLUSHED TO REMOVE LEAVES,
 - DEBRIS, ETC. ONCE THE NEW ROOF DRAINS ARE INSTALLED.
 - 3. CONTRACTOR SHALL REMOVE THE EXISTING CONDENSING UNIT THAT WAS DAMAGED DURING HURRICANE LAURA. CONTRACTOR SHALL PROVIDE AND INSTALL NEW CONDENSING UNIT WITH ONE OF EQUAL SIZE, CAPACITY, ELEC., ETC. CONTRACTOR SHALL FIELD VERIFY PRIOR TO BID, ORDERING EQUIPMENT, AND RESPECTIVE ROUGH-IN. MAKE ALL FINAL CONNECTIONS AND VERIFY EQUIPMENT IS WORKING PROPERLY.

	EXISTING SKYLIGHT
¢	ONE-WAY ROOF VENT
۲	ROOF DRAIN
×	ROOF PIPING PENETRATIO
	ROOF FAN / VENT
	ROOF FAN / VENT
	DOWNSPOUT
	MISC MEP
	CONDUIT/PIPING RUNS


EXPANSION JOINT

1

I.

BUILDING F

ROOF PLAN

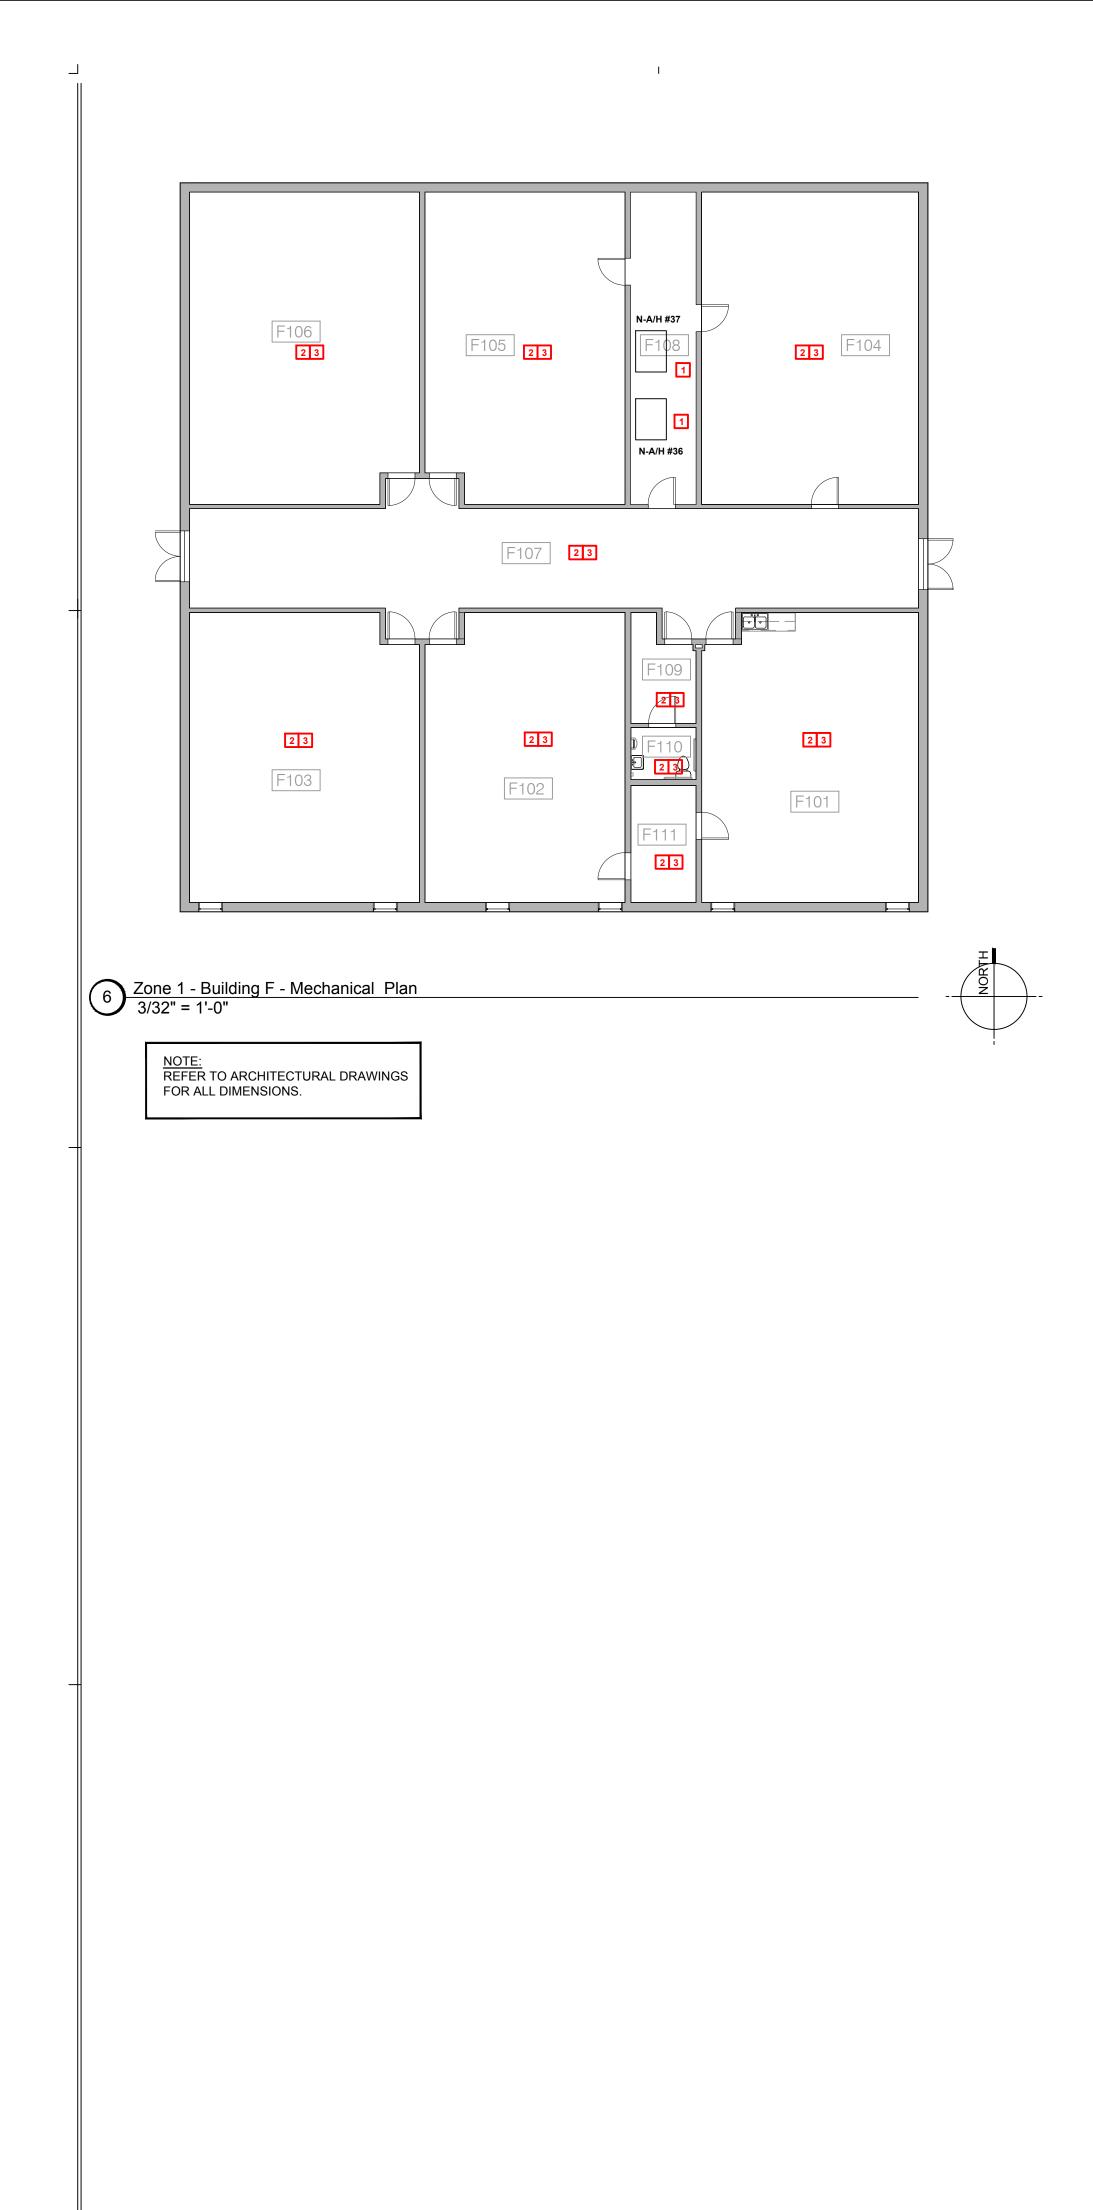

I.

I.

I.

1

1

NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS

<u>NOTE:</u> THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.

NOTE: THE HVAC SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE HVAC SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE) IN MOST CIRCUMSTANCES. THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING ALL THE EXISTING HVAC SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS. ALTHOUGH ALL WORK MUST COMPLY WITH FEMA CONSENSUS-BASED, "LATEST PUBLISHED EDITIONS" OF CODES NOT NECESSARILY THOSE CODES ADOPTED BY THE LOCAL MUNICIPALITY.

GENERAL NOTES:


1

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

KEYNOTES TO SHEET:


- 1. EXISTING AIR HANDLING UNIT TO REMAIN AND CLEANED PER THE SPECIFICATIONS. REMOVE AND REPLACE EXISTING AIR HANDLING UNIT INTERIOR LINER AND CLEAN INTERIOR OF UNIT INCLUDING COILS.
- 2. NO INTERIOR MECHANICAL (PLUMBING & HVAC) WORK ASSOCIATED WITH THESE SPACES WITHIN THE BUILDING.
- 3. CONTRACTOR SHALL TEMPORARILY SUPPORT AND PROTECT ANY EQUIPMENT, DIFFUSERS, GRILLES, ETC. IN OR ABOVE CEILINGS OF THESE SPACES DURING THE REMOVAL AND INSTALLATION OF NEW CEILINGS. REFER TO ARCHITECTURAL PLANS FOR THOSE LOCATIONS.







1



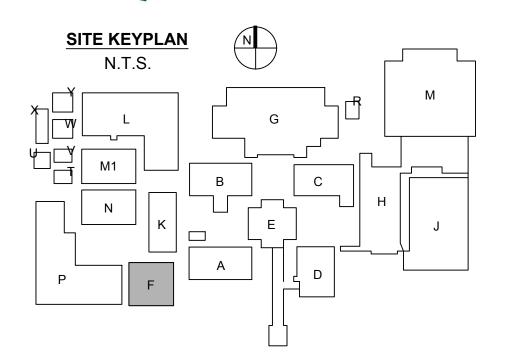

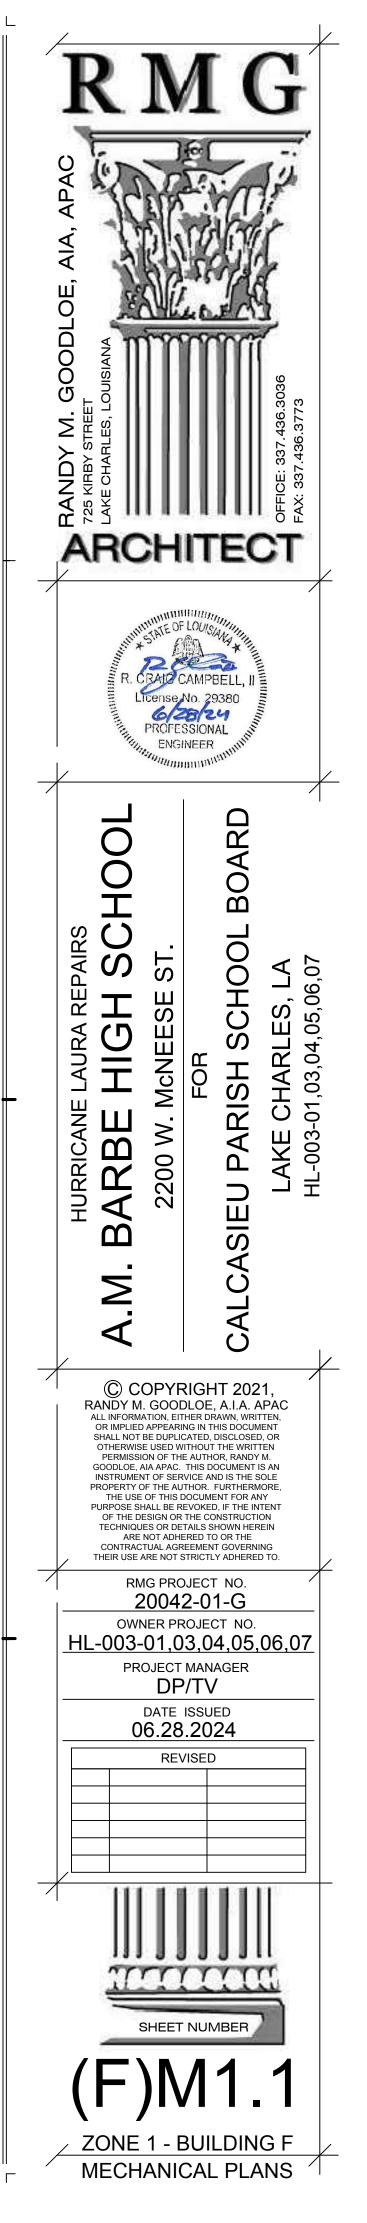

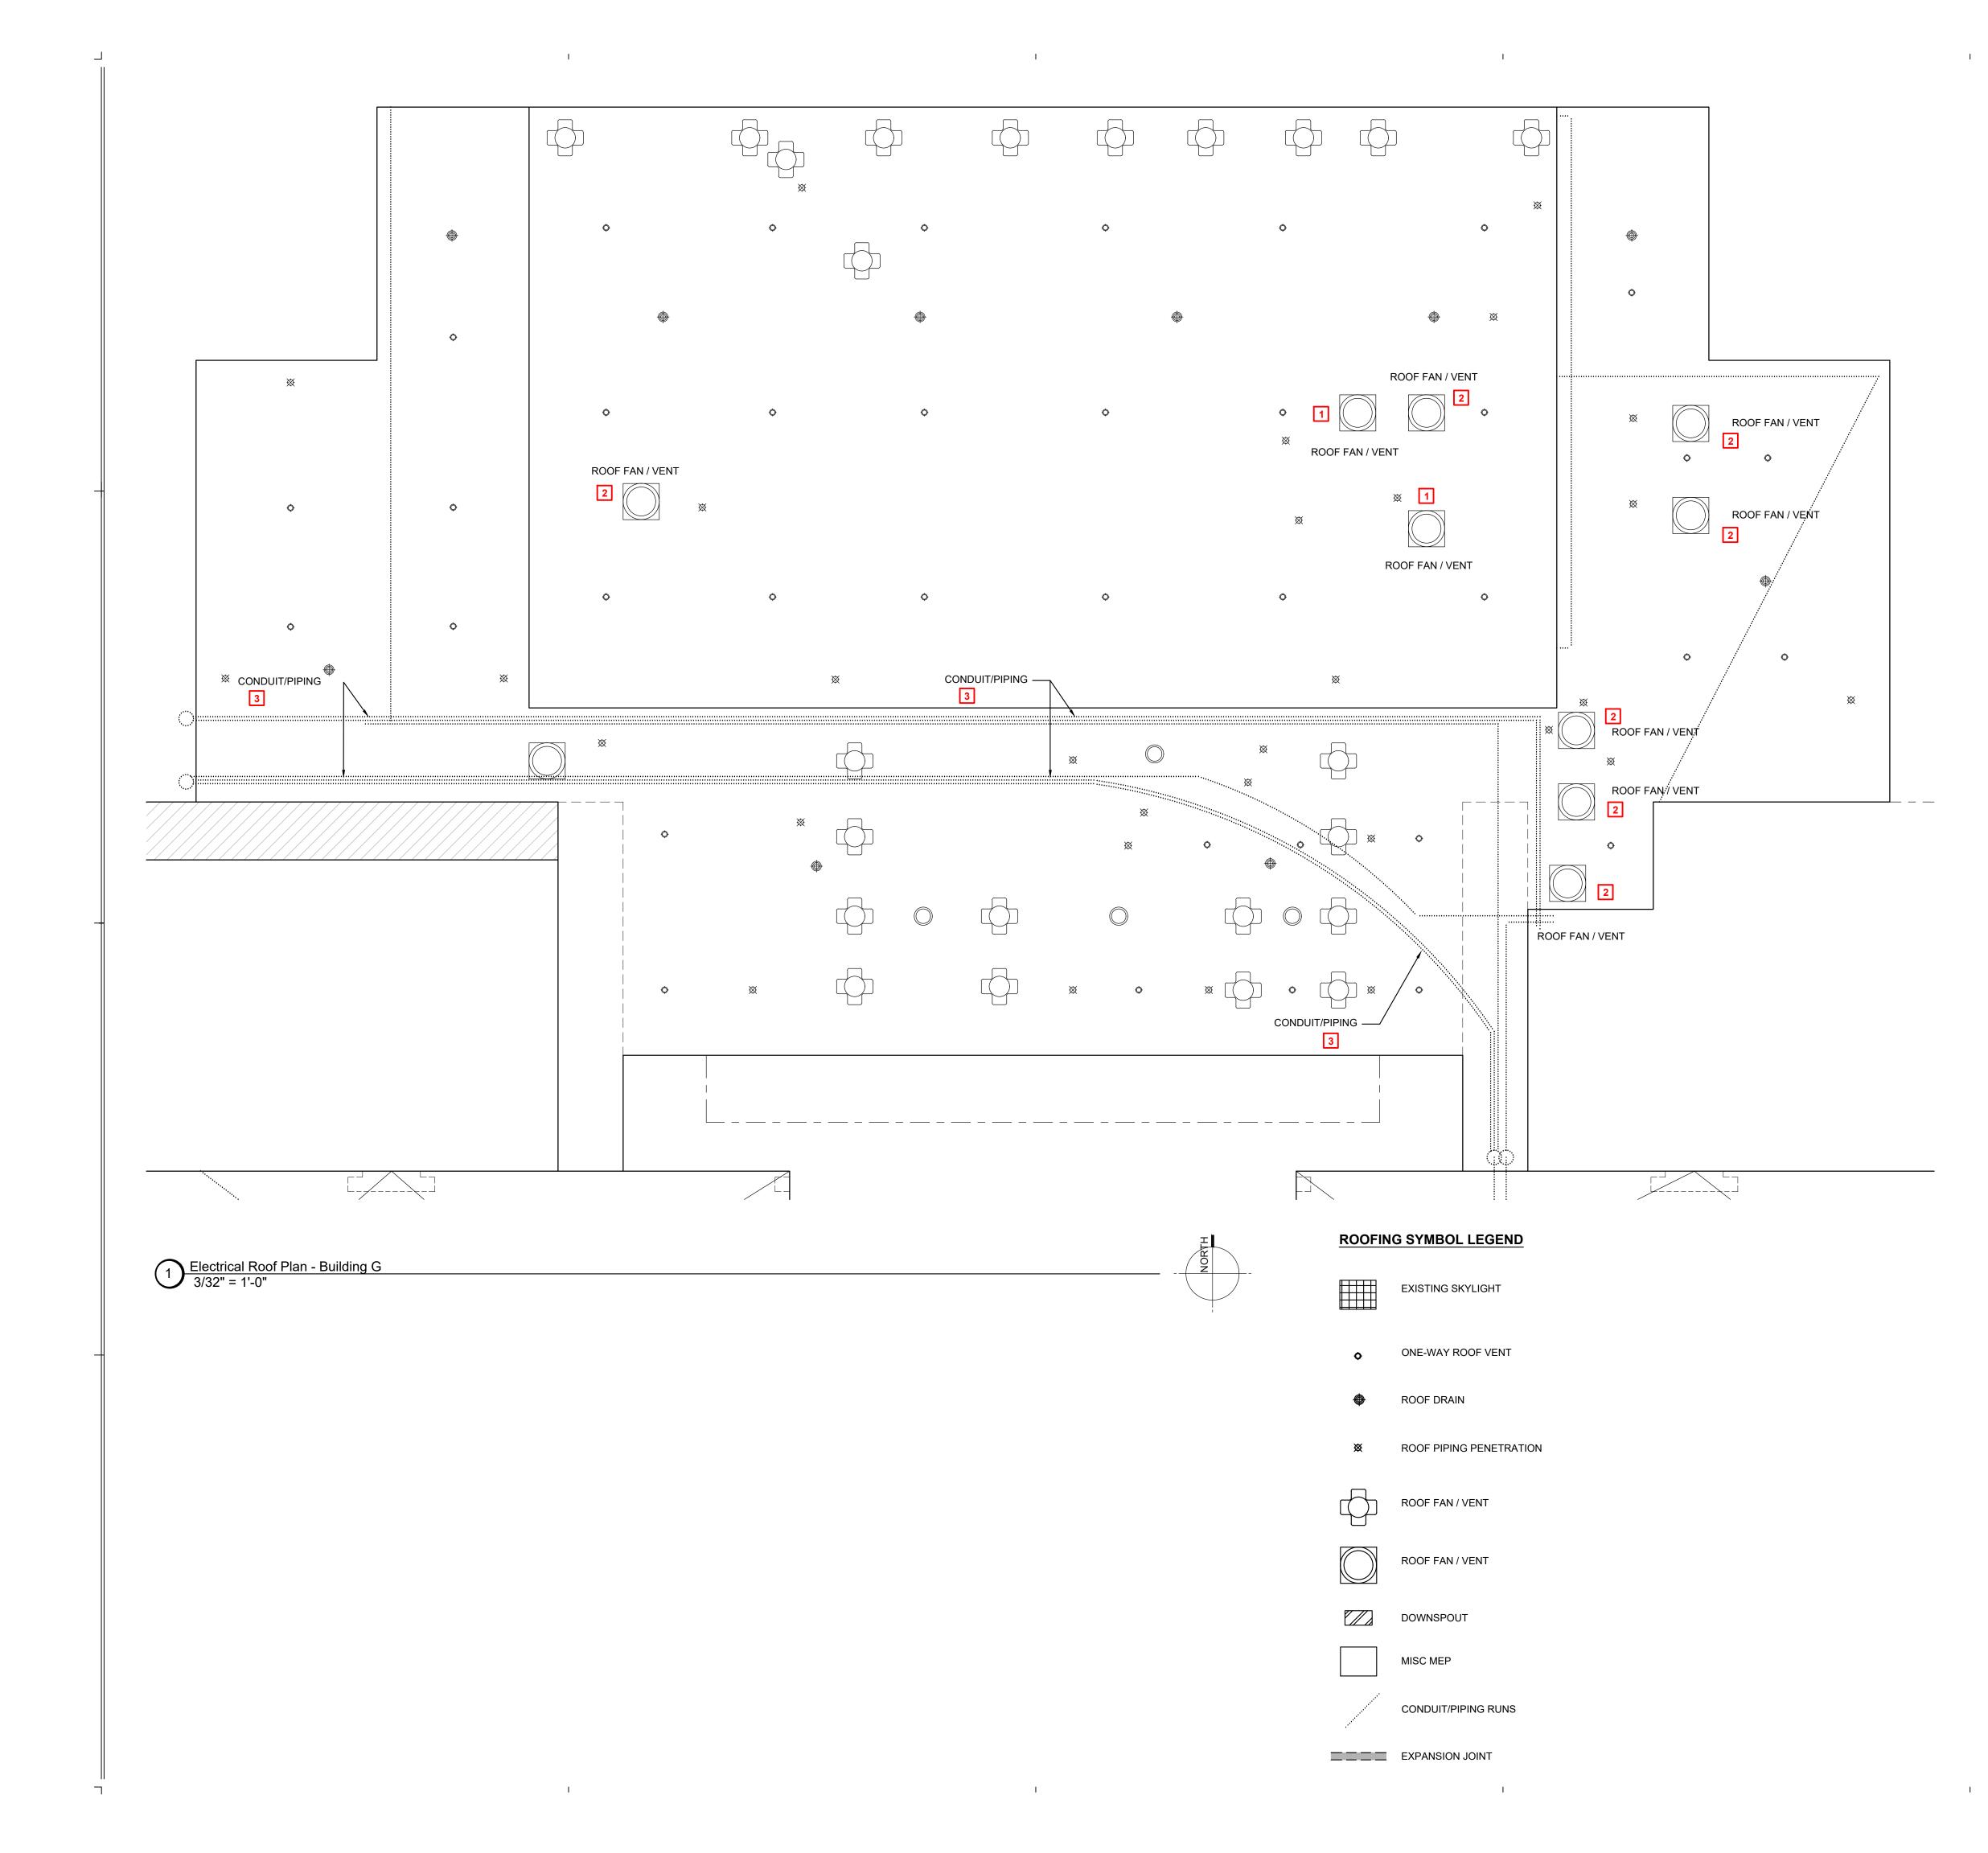

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING ELECTRICAL EQUIPMENT SIZES IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR ORDERING NEW EQUIPMENT.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.

KEYNOTES TO SHEET:

- 1. CONTRACTOR SHALL REMOVE THE EXISTING EXHAUST FAN. CONTRACTOR SHALL PROVIDE AND INSTALL NEW EXHAUST FAN WITH ONE OF EQUAL SIZE, CAPACITY, ELEC., ETC. PROVIDE NEW WEATHERPROOF MOTOR RATED SWITCH AND RECONNECT EXISTING CIRCUIT TO NEW FAN. MAKE ALL FINAL CONNECTIONS AND VERIFY EQUIPMENT IS WORKING PROPERLY.
- 2. CONTRACTOR SHALL REMOVE EXISTING ROOF MOUNTED HOOD/FAN AND AND INSTALL ON NEW CURB. RECONNECT EXISTING ELECTRICAL AFTER ROOFING IS COMPLETE.
- 3. EXISTING CONDUIT SHALL BE TEMPORARILY SUPPORTED AND PROTECTED DURING THE RE-ROOFING PROJECT. ONCE NEW ROOF IS COMPLETED PERMANENT CONDUIT SUPPORTS SHALL BE PROVIDED AS REQUIRED. REFER TO CODE REQUIREMENTS FOR SPACING OF SUPPORTS. SECURE CONDUIT TO SUPPORTS WITH CLAMPS AS NECESSARY.




Associated Design Group, Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

Project No. 20300

NOTE: REFER TO ARCHITECTURAL PLANS FOR ALL DIMENSIONS.

NOTE: THE ELECTRICAL SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE ELECTRICAL SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE). THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING THE EXISTING ELECTRICAL SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS.

CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS

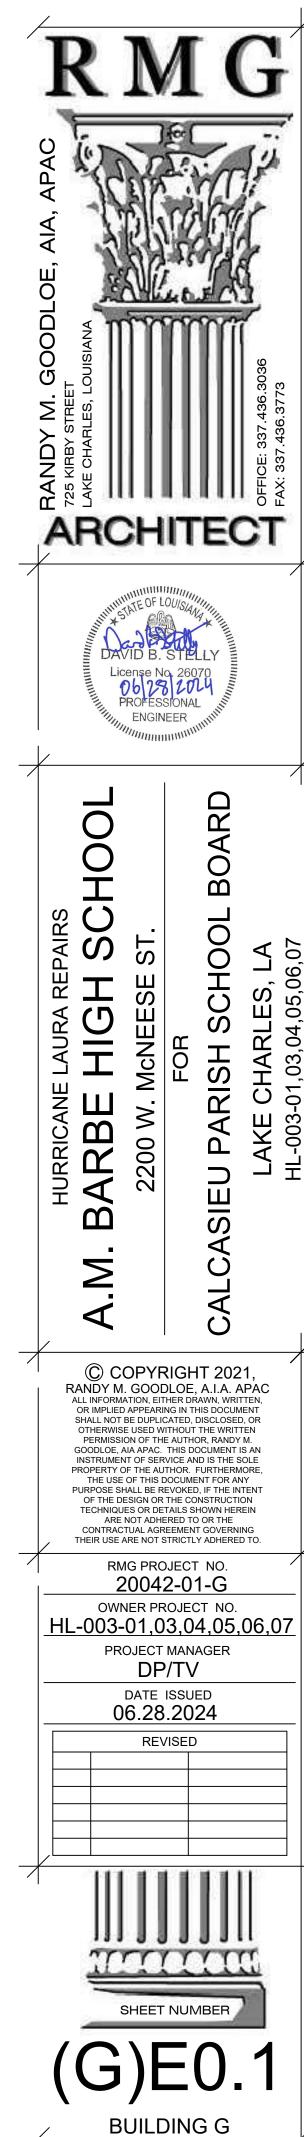

ROOF PLAN



1

1

GENERAL NOTES:

- A. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR TO ORDERING LIGHT FIXTURES.
- B. THE INTENT OF THE PLAN IS FOR EXISTING CIRCUITING TO REMAIN AND BE RE-USED. ALL EXISTING POWER WIRING SHALL BE PROTECTED DURING DEMOLITON AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- D. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF THE 2020 EDITION OF NEC. E. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.
- F. EXISTING LIGHTING THROUGHOUT THE BUIDING HAS BEEN REPLACED BY THE OWNER IN A PREVIOUS PROJECT. IF THERE ARE SPACES WHERE THE DRAWINGS REQUIRE CEILING REPLACEMENT, THE CONTRACTOR WILL BE REQUIRED TO REMOVE THE EXISTING FIXTURES, PROPERLY STORE THEM ONSITE (CONTAINER OR OTHER OWNER APPROVED AREA), THEN RE-INSTALL FOLLOWING REPLACEMENT OF CEILINGS WITHIN A GIVEN SPACE.
- G. ALL EXISTING LOW VOLTAGE WIRING SHALL BE PROTECTED DURING DEMOLITION AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.

KEYNOTES:

- 1. ANY EXISTING CAMERAS OR WIRELESS ACCESS POINTS TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH CPSB IT DEPARTMENT. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED COMMUNICATIONS CABLING.
- 2. ANY EXISTING FIRE ALARM DEVICES TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH SYLVAN SOUND. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED FIRE ALARM WIRING.
- 3. ANY EXISTING INTERCOM DEVICES TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH SYLVAN SOUND. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED INTERCOM WIRING.
- 4. EXISTING LOCATION OF IT RACK. CONTRACTOR IS RESPONSIBLE FOR PROTECTING IT RACK, EQUIPMENT, AND WIRING DURING CONSTRUCTION. IT RACK SHALL REMAIN OPERATIONAL THROUGHOUT CONSTRUCTION UNLESS APPROVED BY CPSB IT FOR IT TO BE POWERED DOWN. PROVIDE COVER FOR RACK TO MINIMIZE DUST AND DEBRIS WHILE AT THE SAME TIME ALLOWING COOLING AND PROPER AIRFLOW.

NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS


NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.


NOTE: THE ELECTRICAL SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE ELECTRICAL SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE). THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING THE EXISTING ELECTRICAL SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS.




Associated Design G_{ROUP} , Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

Project No. 20300

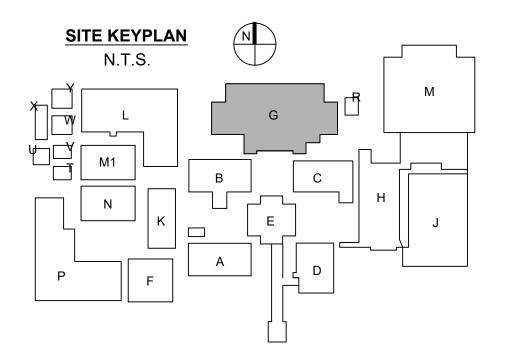

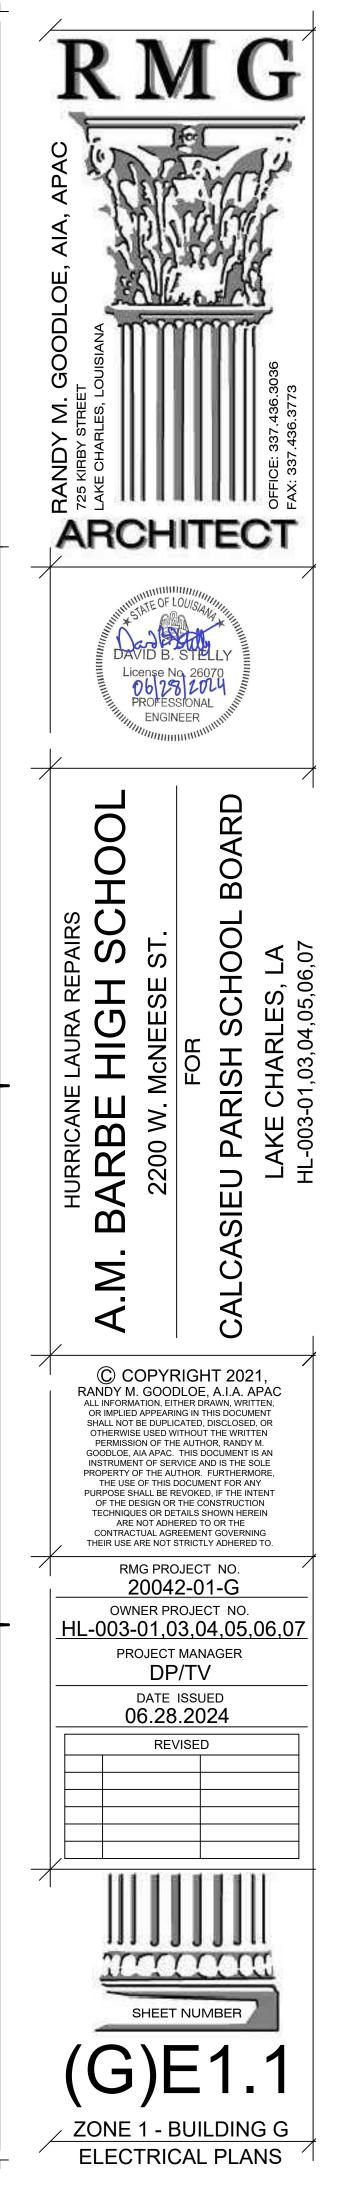

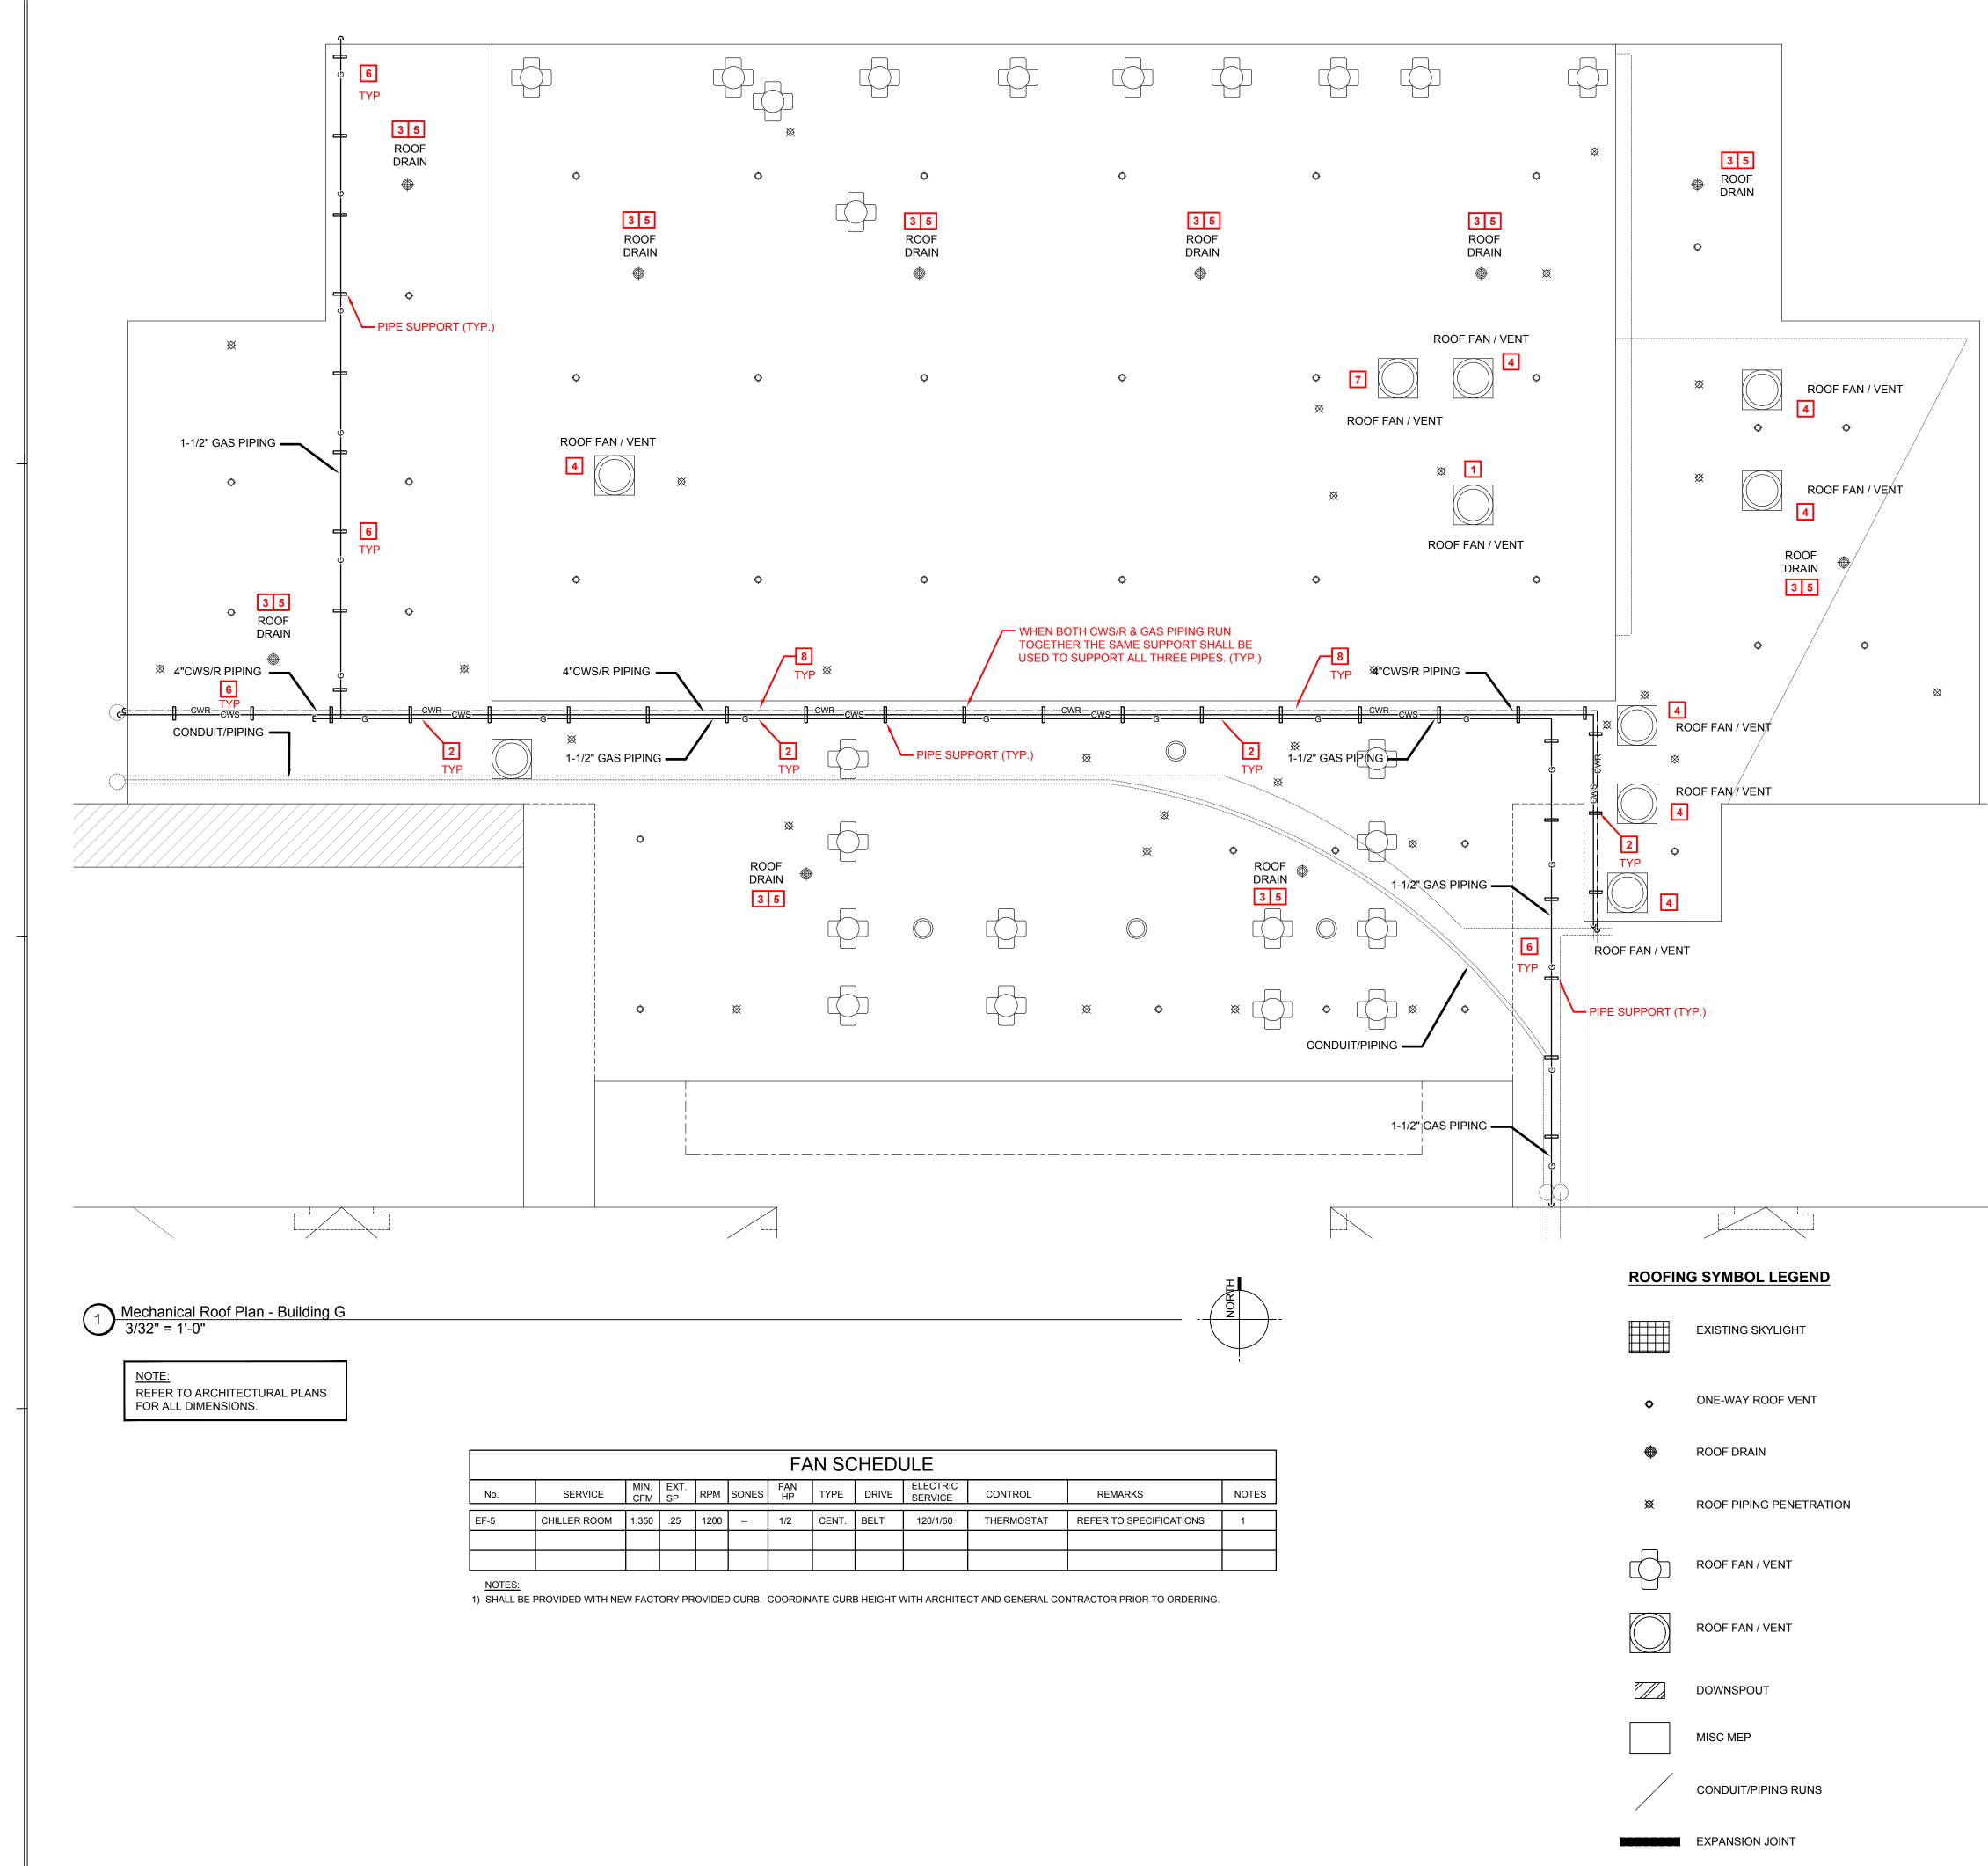

GENERAL NOTES:

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

KEYNOTES TO SHEET:

- 1. CONTRACTOR SHALL REMOVE THE EXISTING EXHAUST FAN. CONTRACTOR SHALL PROVIDE AND INSTALL NEW EXHAUST FAN WITH ONE OF EQUAL SIZE, CAPACITY, ELEC., ETC. CONTRACTOR SHALL FIELD VERIFY PRIOR TO BID, ORDERING EQUIPMENT, AND RESPECTIVE ROUGH-IN. MAKE ALL FINAL CONNECTIONS AND VERIFY EQUIPMENT IS WORKING PROPERLY.
- 2. CONTRACTOR SHALL REMOVE AND REPLACE ALL CHILLED WATER INSULATION AND JACKETING ON CHILLED WATER LINES LOCATED ON ROOF.
- 3. CONTRACTOR SHALL REMOVE EXISTING ROOF DRAIN AN INSTALLED NEW ROOF DRAIN WITH DOME STRAINER IN SAME LOCATION. THE NEW ROOF DRAIN W/ DOME STRAINER SHALL MATCH THE EXISTING SIZE, STYLE, ETC. OF THE EXISTING THAT IS BEING REPLACED AS PART OF THE RE-ROOFING PROJECT.
- 4. CONTRACTOR SHALL REMOVE EXISTING ROOF MOUNTED HOOD/FAN AND AND INSTALL ON NEW CURB. NEW CURB SHALL MATCH THE EXISTING SIZE, STYLE, HEIGHT, ETC. OF EXISTING CURB.
- 5. ALL EXISTING ROOF DRAIN PIPING SHALL BE FLUSHED TO REMOVE LEAVES, DEBRIS, ETC. ONCE THE NEW ROOF DRAINS ARE INSTALLED.
- 6. EXISTING PIPING (GAS) SHALL BE TEMPORARILY SUPPORTED AND PROTECTED DURING THE RE-ROOFING PROJECT. ONCE NEW ROOF IS COMPLETED PERMANENT PIPING SUPPORT (MIRO MODEL 8-BASE STRUT-5) SHALL BE PROVIDED AS REQUIRED. REFER TO CODE REQUIREMENTS FOR SPACING OF SUPPORTS. SHIELDS SHALL BE PLACED BETWEEN CHILLED WATER PIPING SUPPORTS AND PIPING INSULATION. SECURE PIPING TO SUPPORTS WITH CLAMPS AS NECESSARY.
- 7. PROVIDE AND INSTALL NEW 20"X20" THROAT DIMENSION INTAKE HOOD ON ROOF. HOOD SHALL BE ACME MODEL IV OR APPROVED EQUAL. PROVIDE 24"X24" DUCT AS NECESSARY TO CONNECT TO EXISTING DUCT/CEILING GRILLE. HOOD SHALL BE PROVIDED WITH NEW MANUFACTURER PROVIDED CURB. COORDINATE CURB HEIGHT WITH ARCHITECT AND GENERAL CONTRACTOR PRIOR TO ORDERING.
- 8. EXISTING CWS/R PIPING SHALL BE TEMPORARILY SUPPORTED AND PROTECTED DURING THE RE-ROOFING PROJECT. ONCE NEW ROOF AND RE-INSULATING OF PIPING IS COMPLETED A PIPE PERMANENT PIPING SUPPORT (MIRO MODEL 24-BASE STRUT-5) SHALL BE PROVIDED AS REQUIRED. REFER TO CODE REQUIREMENTS FOR SPACING OF SUPPORTS. SHIELDS SHALL BE PLACED BETWEEN CHILLED WATER PIPING SUPPORTS AND PIPING INSULATION. SECURE PIPING TO SUPPORTS WITH CLAMPS AS NECESSARY.



Associated Design Group, Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

Project No. 20300


NOTE:


CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS

NOTE:

1

THE HVAC SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE HVAC SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE). THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING THE EXISTING HVAC SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS.

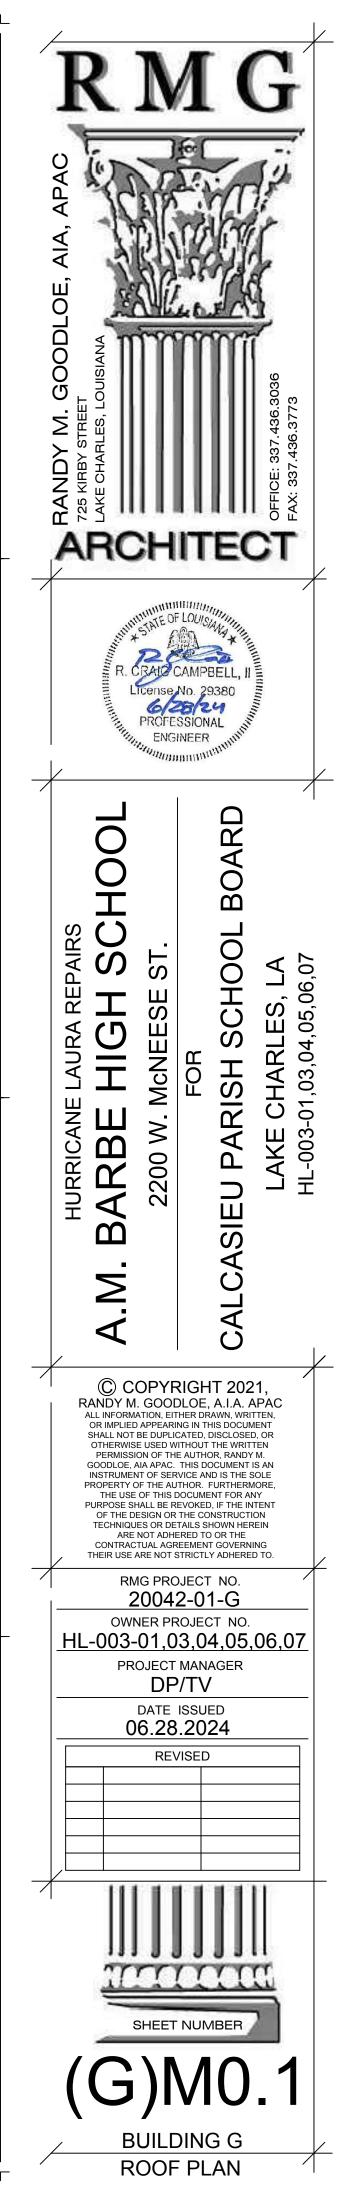

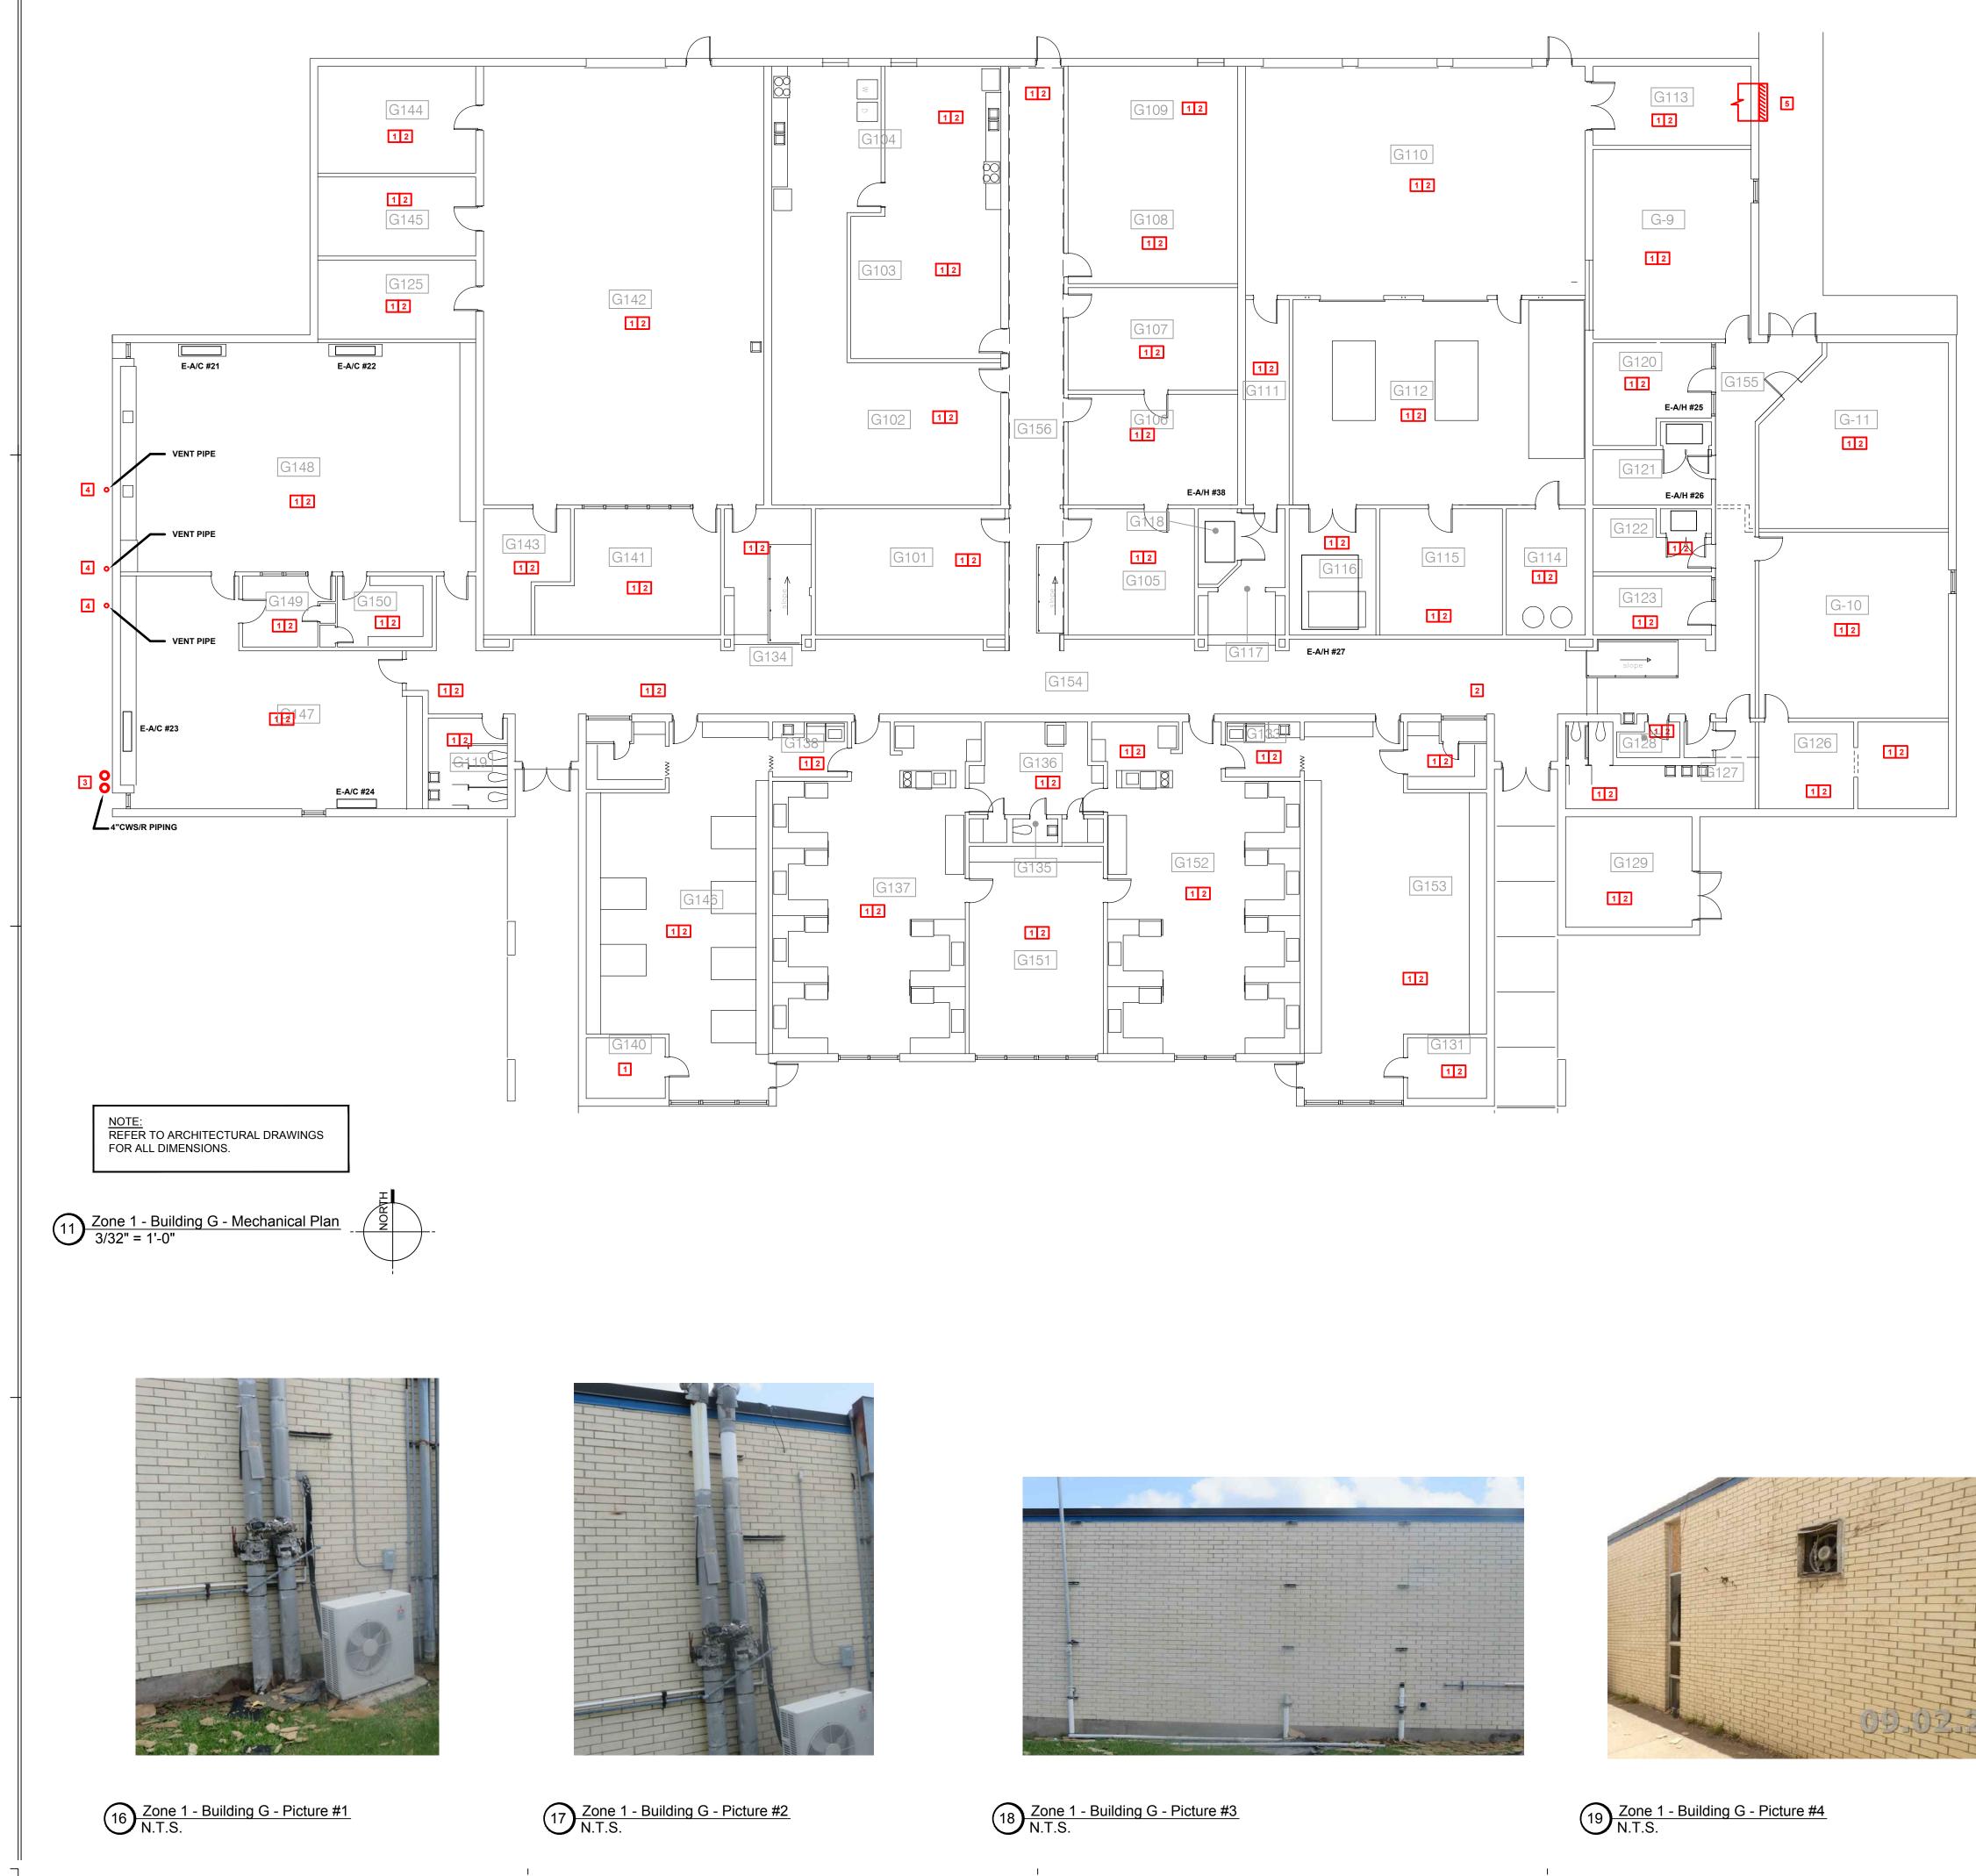

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

KEYNOTES TO SHEET:

- 1. NO INTERIOR MECHANICAL (PLUMBING & HVAC) WORK ASSOCIATED WITH THESE SPACE WITHIN THE BUILDING.
- CONTRACTOR SHALL TEMPORARILY SUPPORT AND PROTECT ANY EQUIPMENT, DIFFUSERS, GRILLES, ETC. IN OR ABOVE CEILINGS OF THESE SPACES DURING THE REMOVAL AND INSTALLATION OF NEW CEILINGS. REFER TO ARCHITECTURAL PLAN G01 BLDG. G.
- 3. CONTRACTOR SHALL REPLACE INSULATION THAT WAS DAMAGED ON EXTERIOR 4" CHILLED WATER PIPING (CWS/CWR) AND VALVES. EACH PIPE IS APPROXIMATELY 15FT IN LENGTH. REFER TO SPECIFICATIONS FOR EXACT REQUIREMENTS. REFER TO PICTURES #1 & #2 ON THIS SHEET.
- 4. CONTRACTOR SHALL REPLACE SANITARY SEWER WASTE & VENT PIPING ON EXTERIOR WALL THAT WAS DAMAGED. NEW PIPING SHALL MATCH EXISTING SIZE AND MATERIAL. APPROXIMATELY EACH DROP IS 15FT IN LENGTH. REFER TO PICTURE # 3 ON THIS SHEET.
- 5. CONTRACTOR SHALL REMOVE THE EXISTING WALL EXHAUST FAN. CONTRACTOR SHALL PROVIDE AND INSTALL NEW EXHAUST FAN WITH ONE OF EQUAL SIZE, CAPACITY, ELEC., ETC. CONTRACTOR SHALL FIELD VERIFY PRIOR TO BID, ORDERING EQUIPMENT, AND RESPECTIVE ROUGH-IN. MAKE ALL FINAL CONNECTIONS AND VERIFY EQUIPMENT IS WORKING PROPERLY. REFER TO PICTURE #4 ON THIS SHEET.


NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS


NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.

<u>NOTE:</u> THE HVAC SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE HVAC SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE) IN MOST CIRCUMSTANCES. THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING ALL THE EXISTING HVAC SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS. ALTHOUGH ALL WORK MUST COMPLY WITH FEMA CONSENSUS-BASED, "LATEST PUBLISHED EDITIONS" OF CODES NOT NECESSARILY THOSE CODES ADOPTED BY THE LOCAL MUNICIPALITY.

NGINEERIN


Associated Design G_{ROUP} , Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

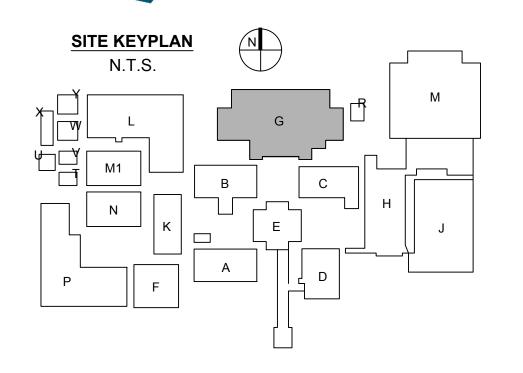

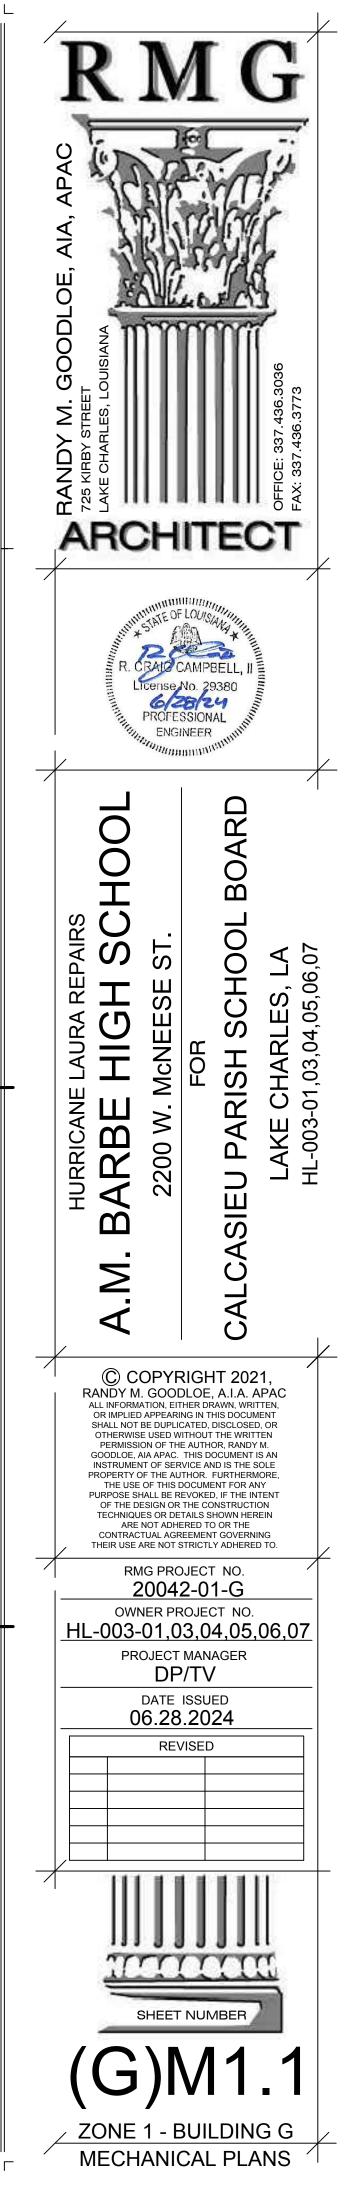

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING ELECTRICAL EQUIPMENT SIZES IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR ORDERING NEW EQUIPMENT.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.

1

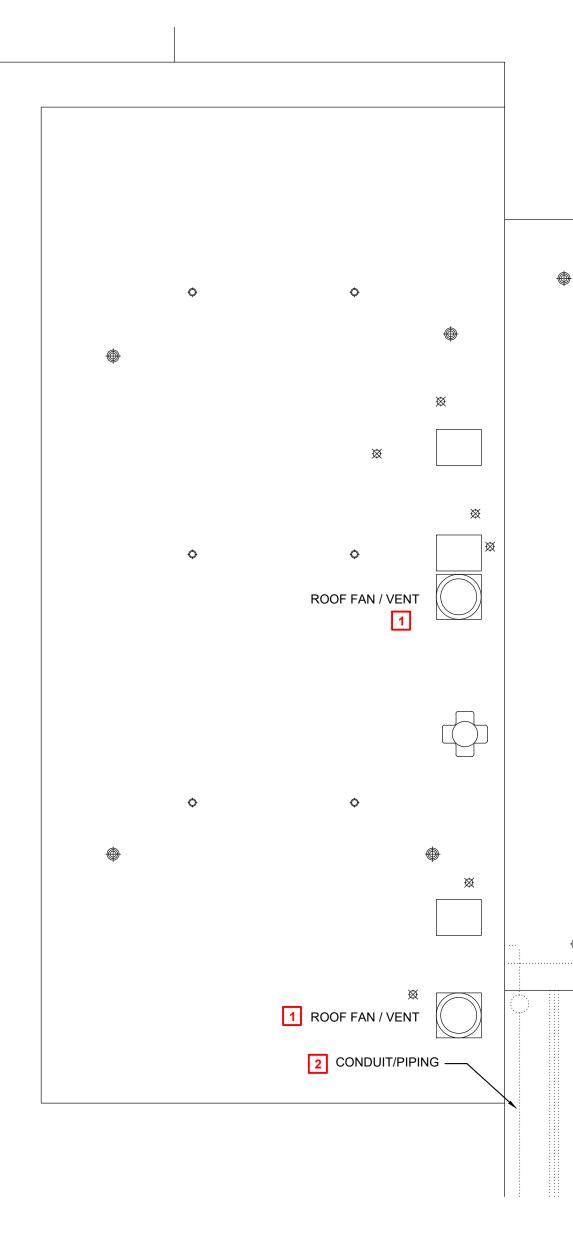



1 Electrical Roof Plan - Building K 3/32" = 1'-0"

KEYNOTES TO SHEET:

I.

I.


- 1. CONTRACTOR SHALL REMOVE EXISTING ROOF MOUNTED HOOD/FAN AND AND INSTALL ON NEW CURB. RECONNECT EXISTING ELECTRICAL ONCE ROOF IS COMPLETED.
- 2. EXISTING CONDUIT SHALL BE TEMPORARILY SUPPORTED AND PROTECTED DURING THE RE-ROOFING PROJECT. ONCE NEW ROOF IS COMPLETED PERMANENT CONDUIT SUPPORTS SHALL BE PROVIDED AS REQUIRED. REFER TO CODE REQUIREMENTS FOR SPACING OF SUPPORTS. SECURE CONDUIT TO SUPPORTS WITH CLAMPS AS NECESSARY.


ROOFING SYMBOL LEGEND

	EXISTING SKYLIGHT
¢	ONE-WAY ROOF VENT
۲	ROOF DRAIN
X	ROOF PIPING PENETRATION
	ROOF FAN / VENT
\bigcirc	ROOF FAN / VENT
	DOWNSPOUT
	MISC MEP
	CONDUIT/PIPING RUNS

1

EXPANSION JOINT

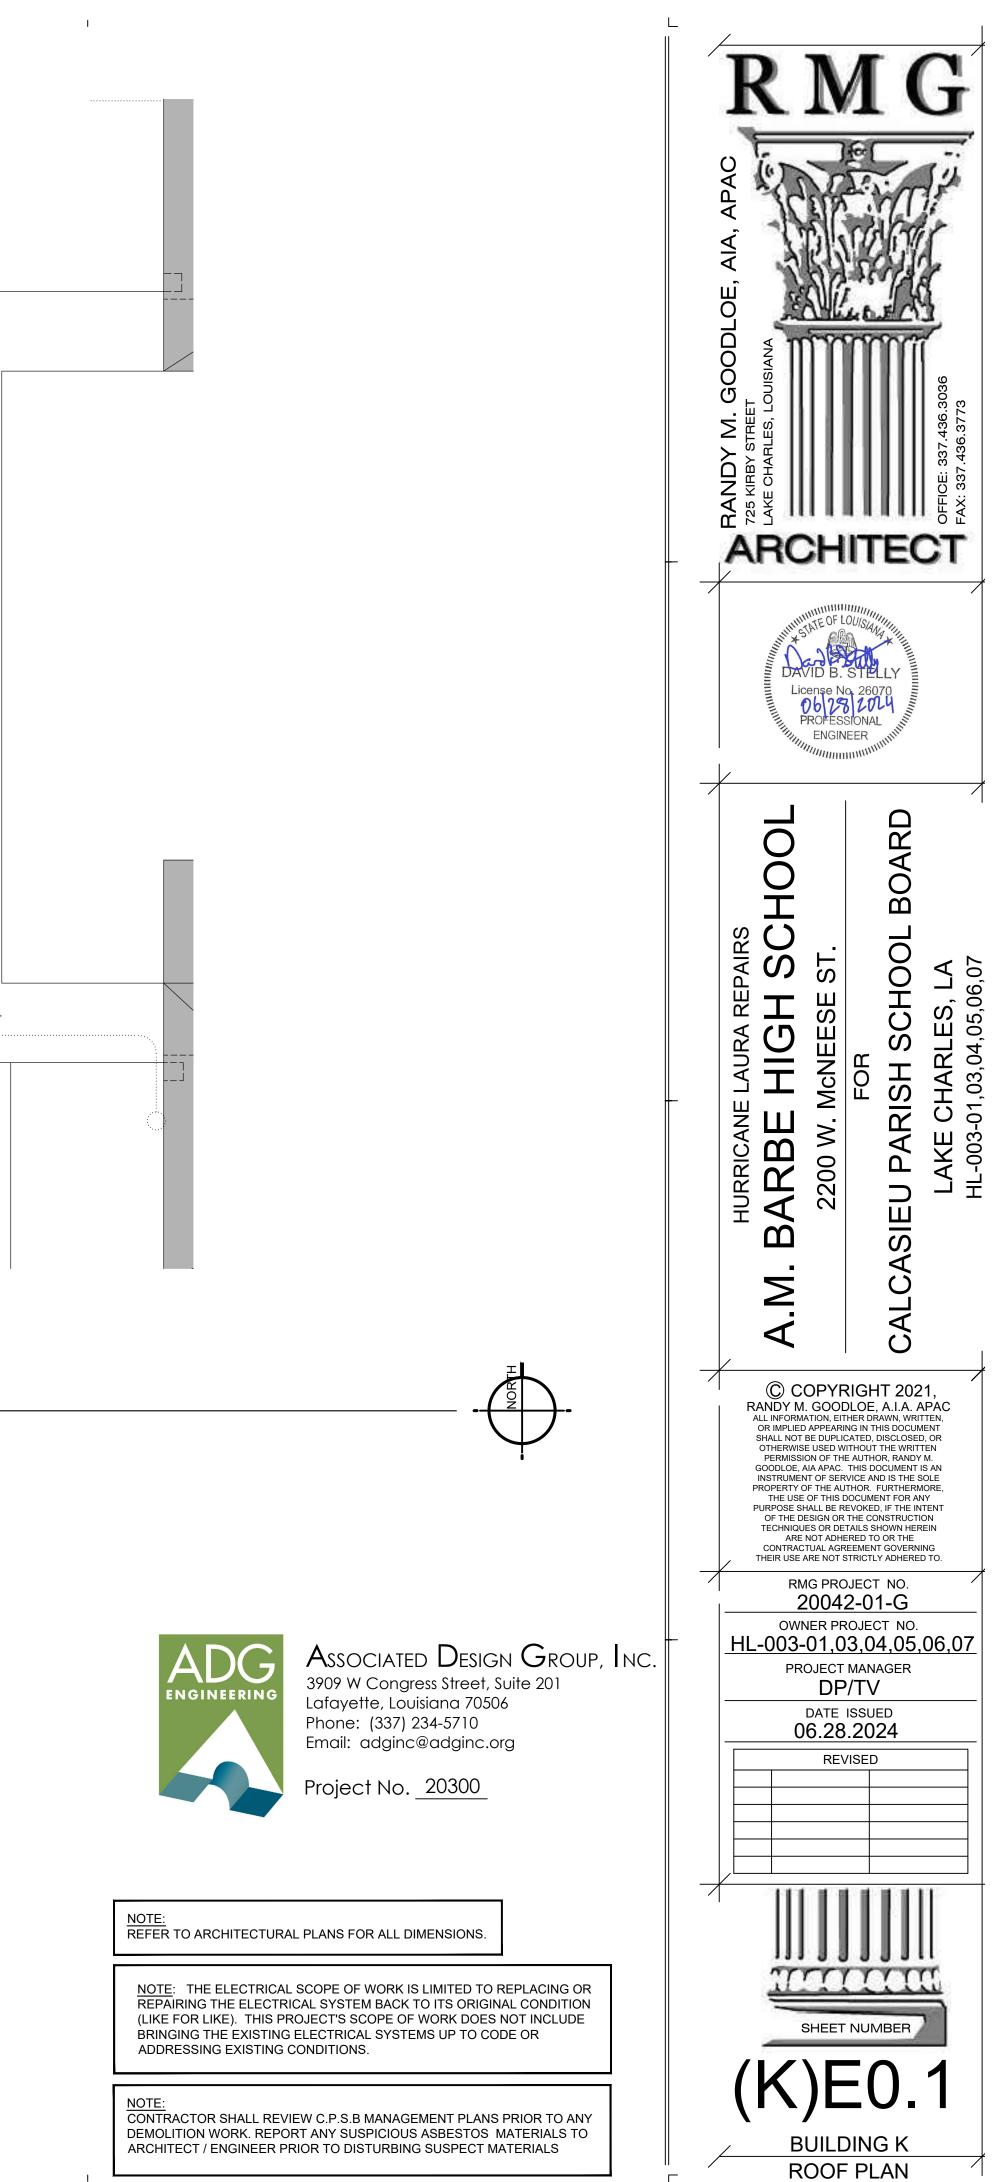

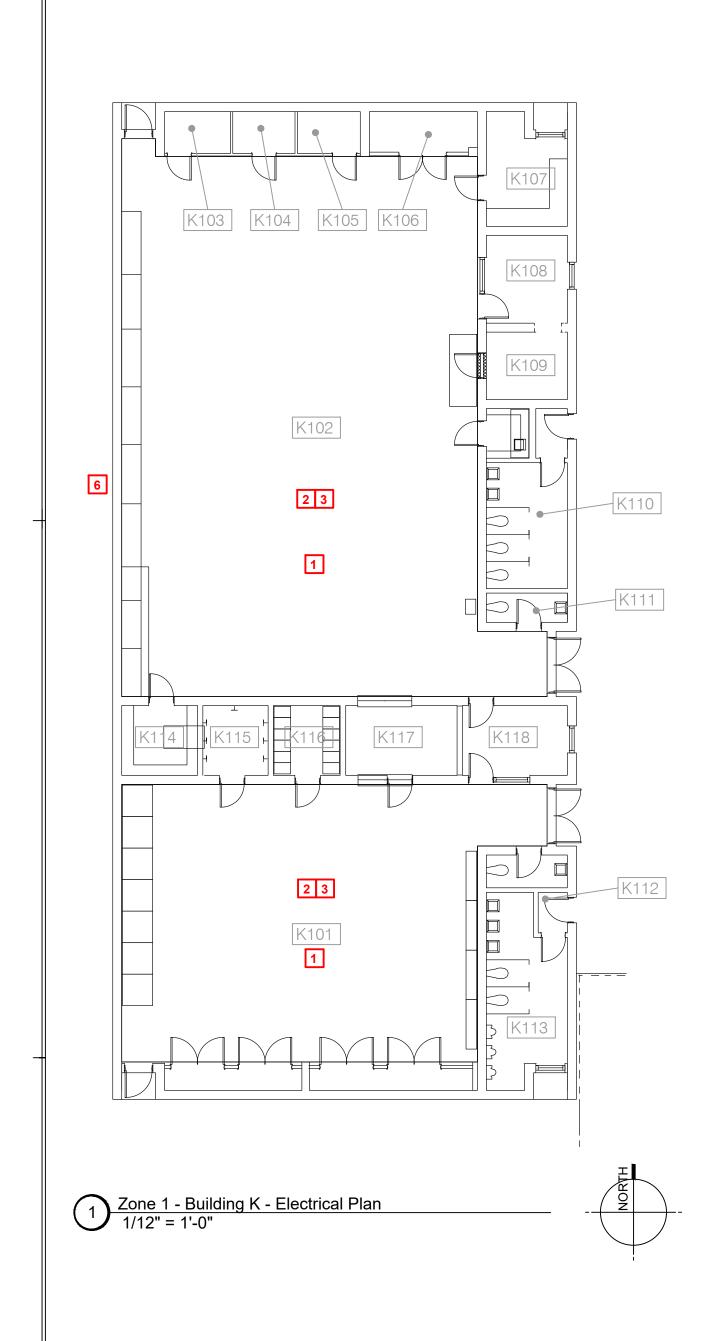

1

GENERAL NOTES:

1

1

- A. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR TO ORDERING LIGHT FIXTURES.
- B. THE INTENT OF THE PLAN IS FOR EXISTING CIRCUITING TO REMAIN AND BE RE-USED. ALL EXISTING POWER WIRING SHALL BE PROTECTED DURING DEMOLITON AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- D. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF THE 2020 EDITION OF NEC.
- E. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.
- F. EXISTING LIGHTING THROUGHOUT THE BUIDING HAS BEEN REPLACED BY THE OWNER IN A PREVIOUS PROJECT. IF THERE ARE SPACES WHERE THE DRAWINGS REQUIRE CEILING REPLACEMENT, THE CONTRACTOR WILL BE REQUIRED TO REMOVE THE EXISTING FIXTURES, PROPERLY STORE THEM ONSITE (CONTAINER OR OTHER OWNER APPROVED AREA), THEN RE-INSTALL FOLLOWING REPLACEMENT OF CEILINGS WITHIN A GIVEN SPACE.
- G. ALL EXISTING LOW VOLTAGE WIRING SHALL BE PROTECTED DURING DEMOLITION AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.

I.

KEYNOTES:

1

- ANY EXISTING CAMERAS OR WIRELESS ACCESS POINTS TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH CPSB IT DEPARTMENT. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED COMMUNICATIONS CABLING.
- 2. ANY EXISTING FIRE ALARM DEVICES TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH SYLVAN SOUND. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED FIRE ALARM WIRING.
- 3. ANY EXISTING INTERCOM DEVICES TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH SYLVAN SOUND. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED INTERCOM WIRING.
- CONTRACTOR SHALL DISCONNECT AND REMOVE EXISTING WALL PACKS ON THIS SIDE OF THE BUILDING (2 TOTAL) AND PROVIDE NEW FIXTURES TYPE 'W'. FIXTURES TYPE 'W'. FIXTURE TYPE 'W' SHALL BE LUMARK OR EQUAL WPMLED20B-120V. . MOUNT NEW FIXTURES IN THE SAME LOCATIONS AND CONNECT TO EXISTING LIGHTING CIRCUIT. SWITCH THROUGH EXISTING PHOTOCELL. IF PHOTOCELL IS MISSING OR NOT WORKING PROVIDE NEW UNIT.

NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS


NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.


NOTE: THE ELECTRICAL SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE ELECTRICAL SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE). THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING THE EXISTING ELECTRICAL SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS.



Associated Design Group, Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

Project No. 20300

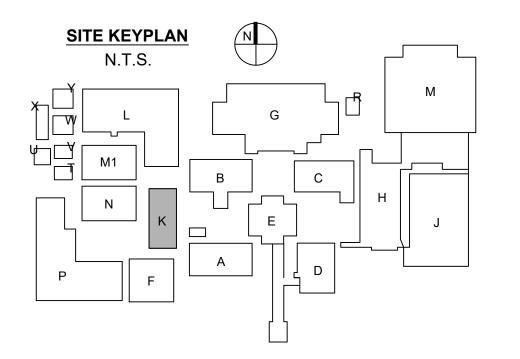


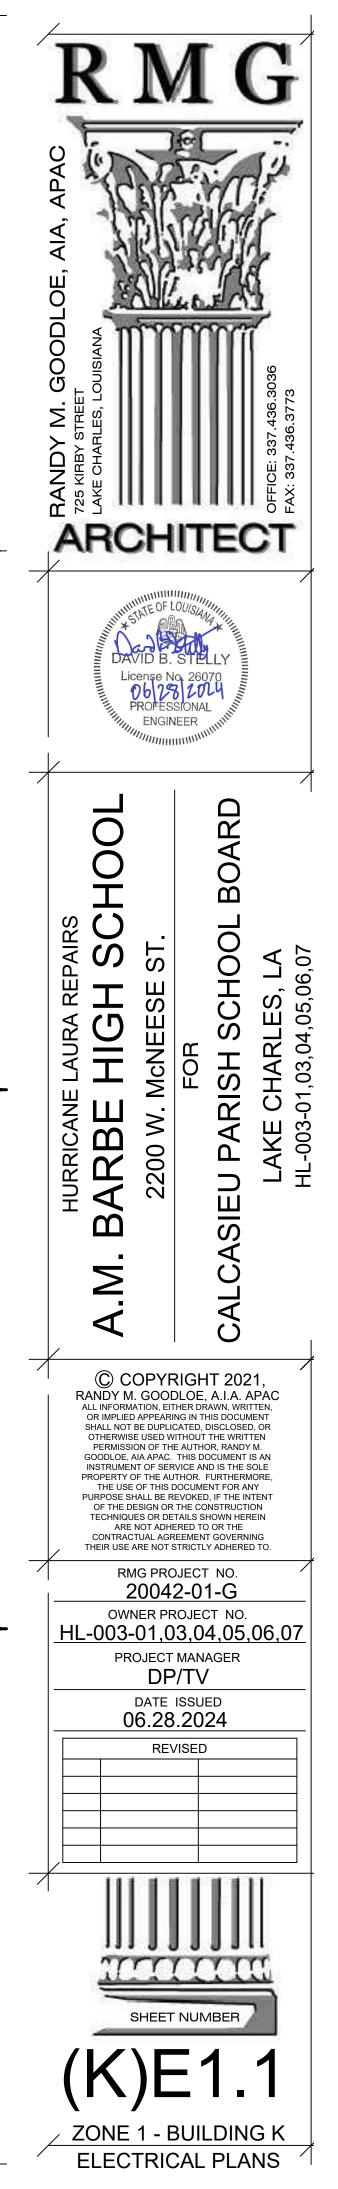

1

I

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

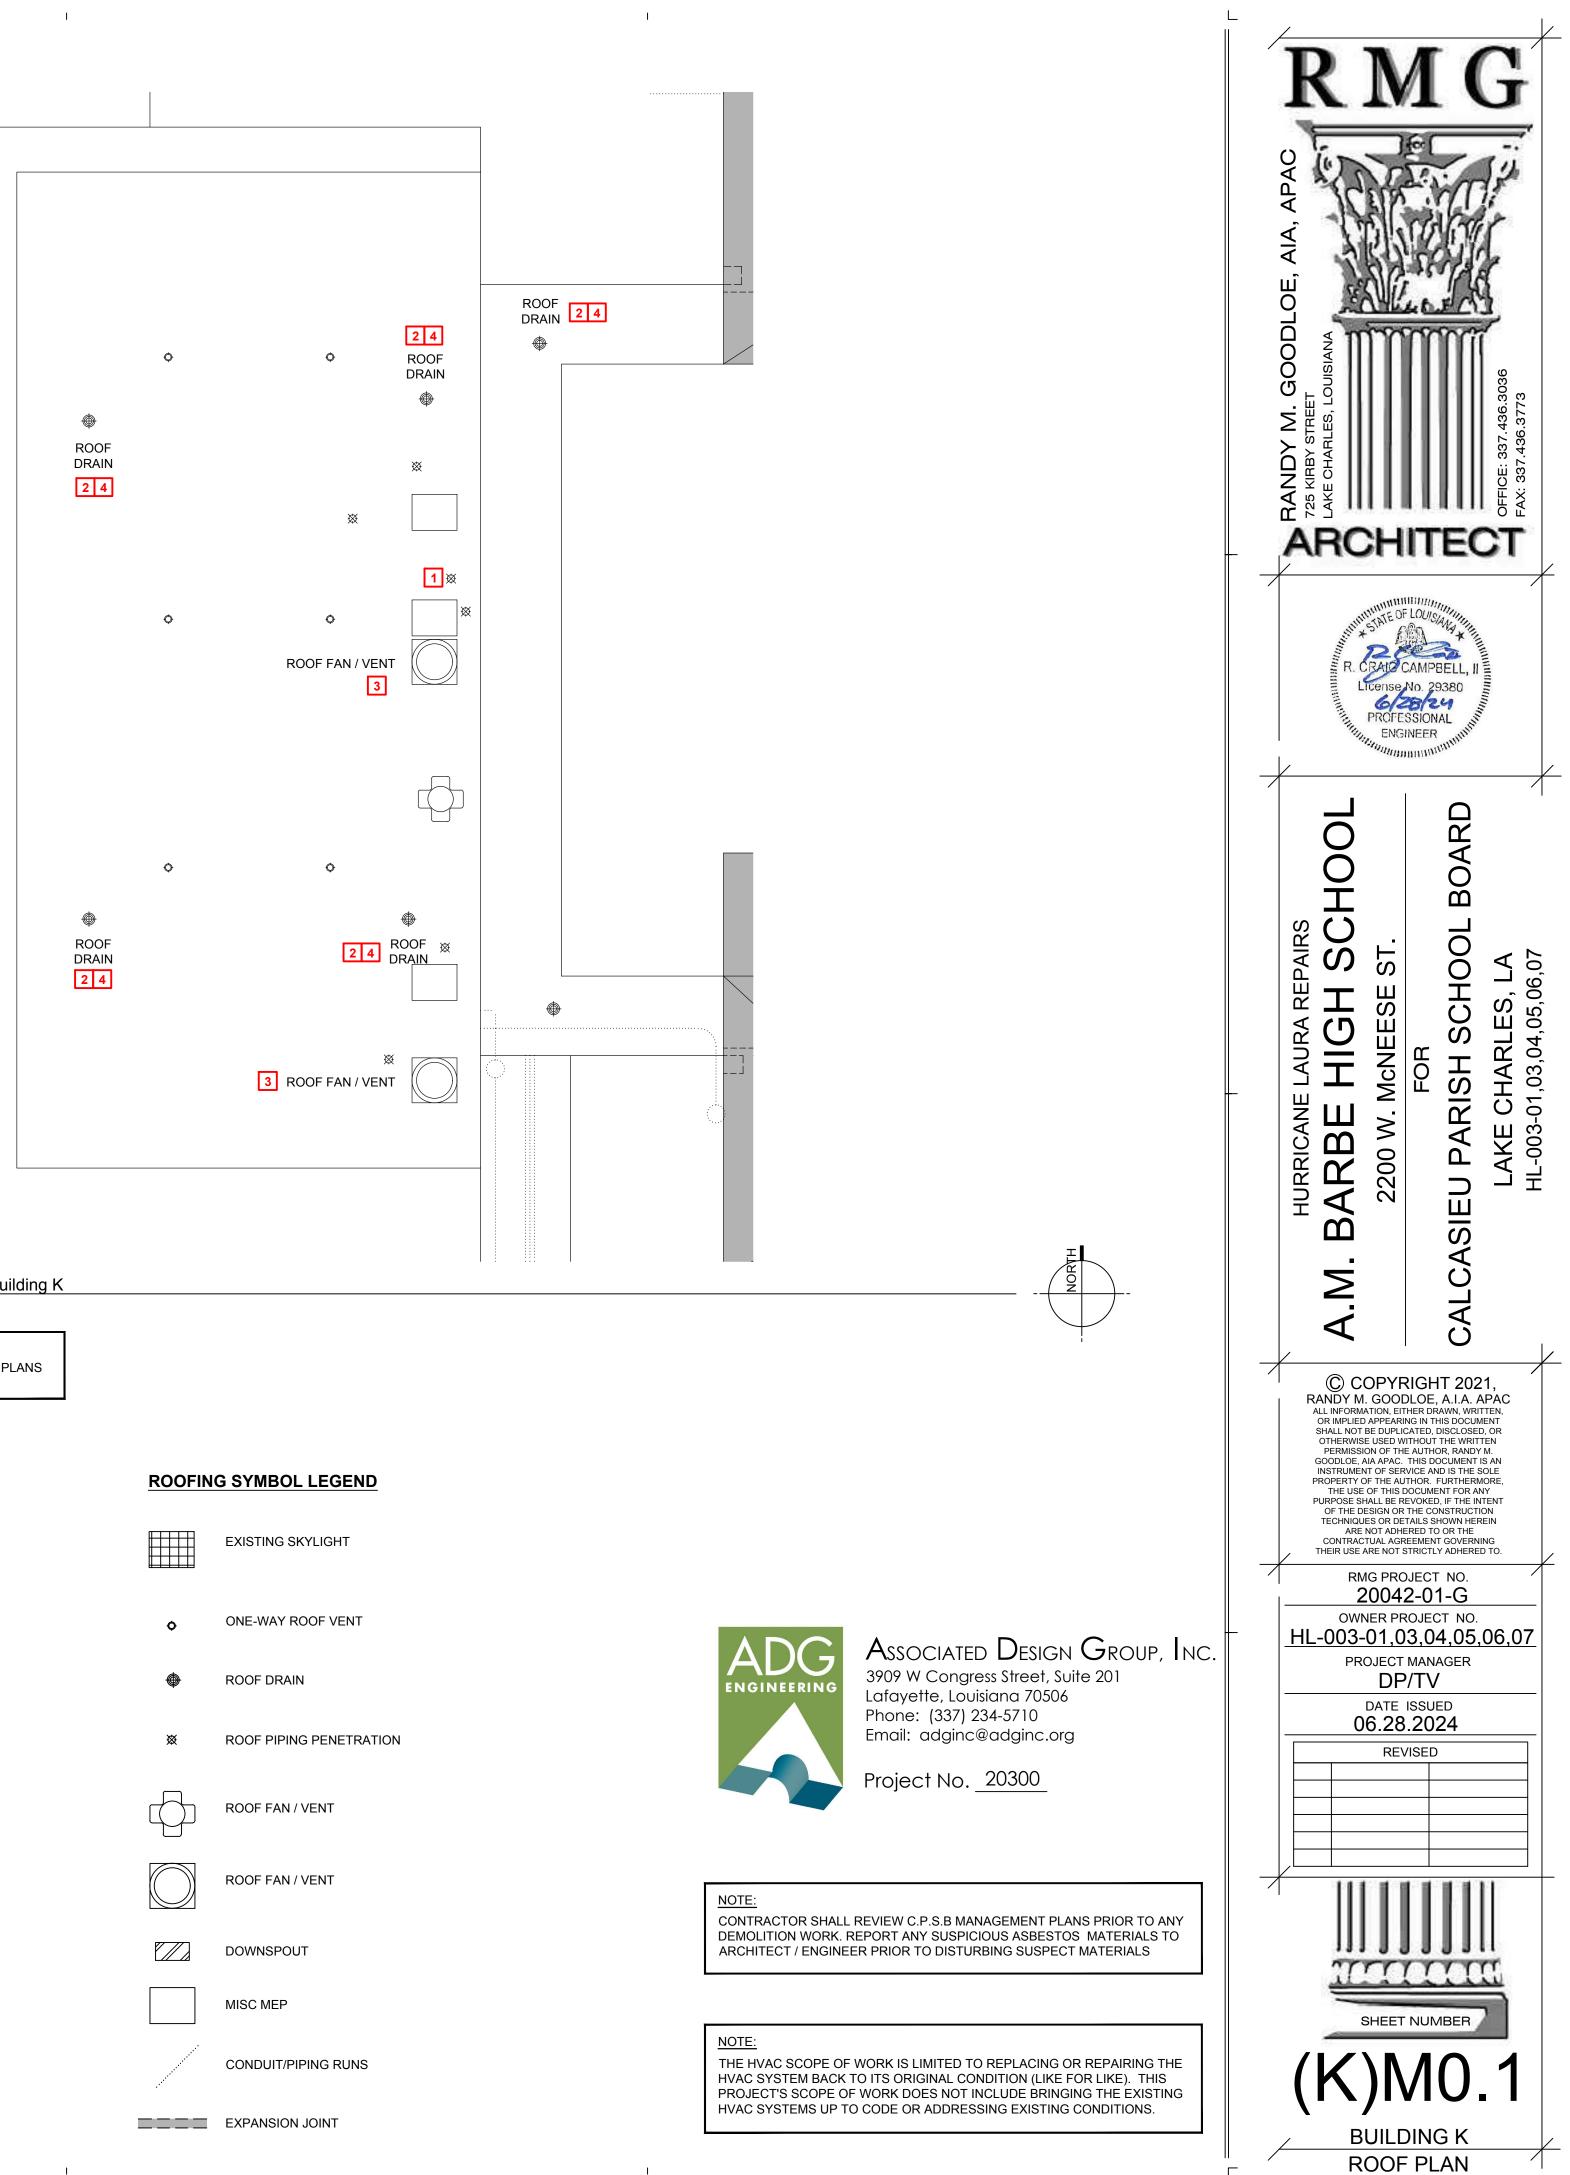

1

Mechanical Roof Plan - Building K

3/32" = 1'-0"

NOTE: REFER TO ARCHITECTURAL PLANS FOR ALL DIMENSIONS.

D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO


I

1

KEYNOTES TO SHEET:

- 1. CONTRACTOR SHALL REMOVE AND REPLACE EXISTING VENT THAT WAS DAMAGED DURING HURRICANE LAURA. REPLACE WITH ONE OF EQUAL SIZE.
- 2. CONTRACTOR SHALL REMOVE EXISTING ROOF DRAIN AN INSTALLED NEW ROOF DRAIN WITH DOME STRAINER IN SAME LOCATION. THE NEW ROOF DRAIN W/ DOME STRAINER SHALL MATCH THE EXISTING SIZE, STYLE, ETC. OF THE EXISTING THAT IS BEING REPLACED AS PART OF THE RE-ROOFING PROJECT.
- 2. CONTRACTOR SHALL REMOVE EXISTING ROOF MOUNTED HOOD/FAN AND AND INSTALL ON NEW CURB. NEW CURB SHALL MATCH THE EXISTING SIZE, STYLE, ETC. OF EXISTING CURB. COORDINATE CURB HEIGHT WITH ARCHITECT & GENERAL CONTRACTOR PRIOR ORDERING.
- 3. ALL EXISTING ROOF DRAIN PIPING SHALL BE FLUSHED TO REMOVE LEAVES, DEBRIS, ETC. ONCE THE NEW ROOF DRAINS ARE INSTALLED.
- 4. EXISTING PIPING (GAS, CHILLED WATER, ETC.) SHALL BE TEMPORARILY SUPPORTED AND PROTECTED DURING THE RE-ROOFING PROJECT. ONCE NEW ROOF IS COMPLETED PERMANENT PIPING SUPPORT SHALL BE PROVIDED AS REQUIRED. REFER TO CODE REQUIREMENTS FOR SPACING OF SUPPORTS. SHIELDS SHALL BE PLACED BETWEEN CHILLED WATER PIPING SUPPORTS AND PIPING INSULATION. SECURE PIPING TO SUPPORTS WITH CLAMPS AS NECESSARY.

EXISTING SKYLIGHT
ONE-WAY ROOF VENT
ROOF DRAIN
ROOF PIPING PENETRATION
ROOF FAN / VENT
ROOF FAN / VENT
DOWNSPOUT
MISC MEP
CONDUIT/PIPING RUNS

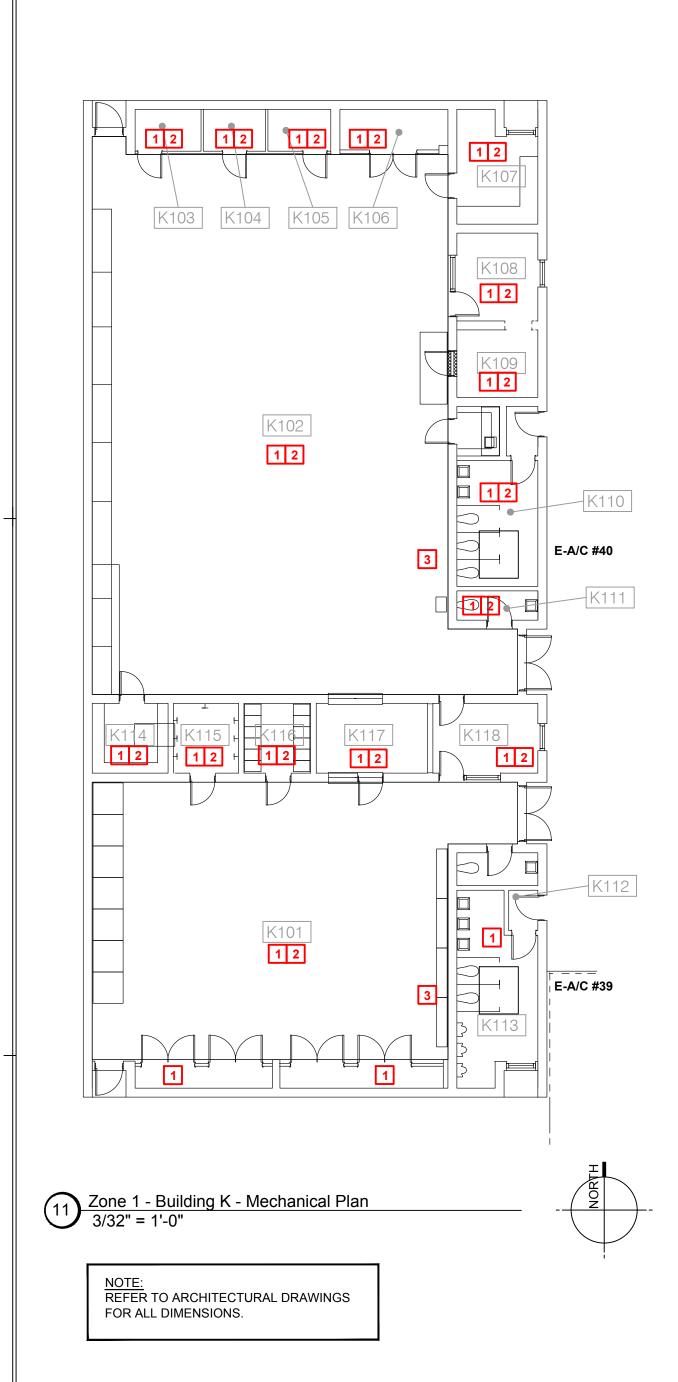

I

I.

1 1

1

GENERAL NOTES:

1

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

KEYNOTES TO SHEET:

- 1. NO INTERIOR MECHANICAL (PLUMBING & HVAC) WORK ASSOCIATED WITH THESE SPACE WITHIN THE BUILDING.
- 2. CONTRACTOR SHALL TEMPORARILY SUPPORT AND PROTECT ANY EQUIPMENT, DIFFUSERS, GRILLES, ETC. IN OR ABOVE CEILINGS OF THESE SPACES DURING THE REMOVAL AND INSTALLATION OF NEW CEILINGS. REFER TO ARCHITECTURAL PLAN K01 BLDG K.

NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS


NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.


NOTE: THE HVAC SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE HVAC SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE) IN MOST CIRCUMSTANCES. THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING ALL THE EXISTING HVAC SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS. ALTHOUGH ALL WORK MUST COMPLY WITH FEMA CONSENSUS-BASED, "LATEST PUBLISHED EDITIONS" OF CODES NOT NECESSARILY THOSE CODES ADOPTED BY THE LOCAL MUNICIPALITY.




1

Associated Design Group, Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

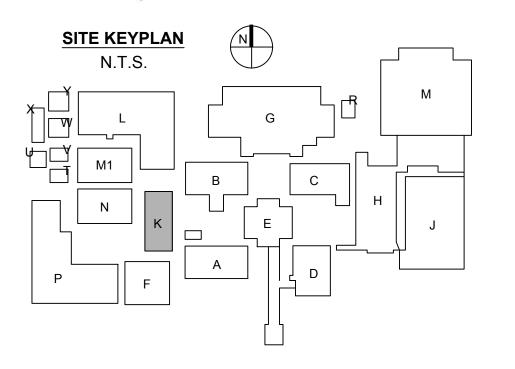

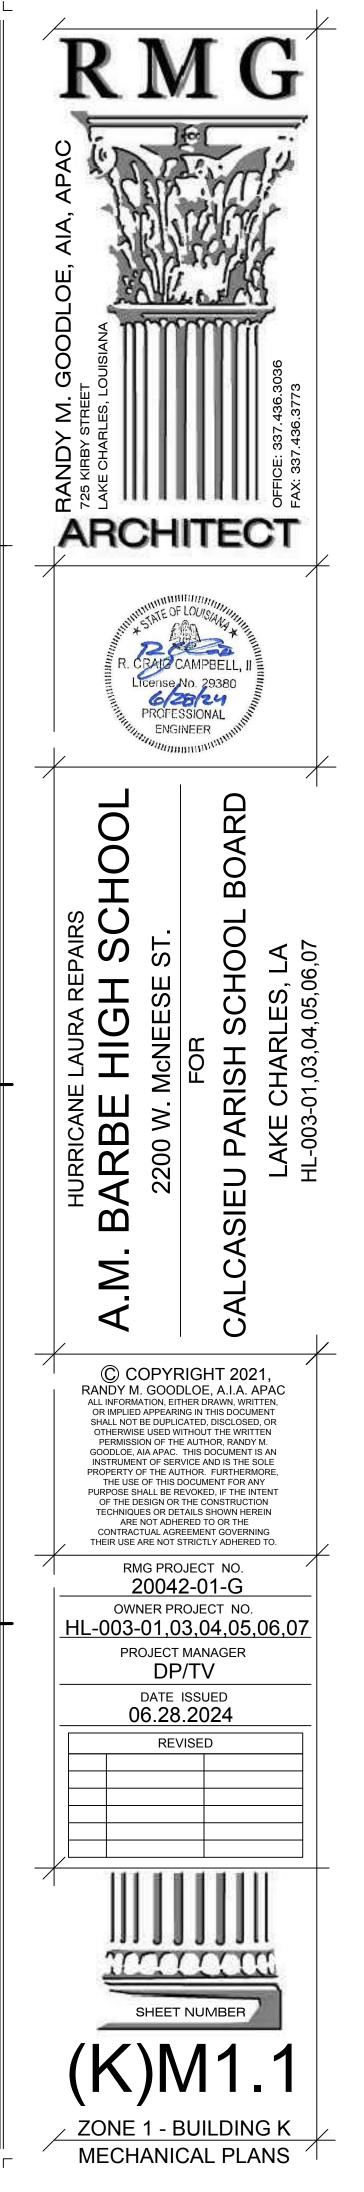


- A. CONTRACTOR SHALL FIELD VERIFY EXISTING ELECTRICAL EQUIPMENT SIZES IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR ORDERING NEW EQUIPMENT.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.

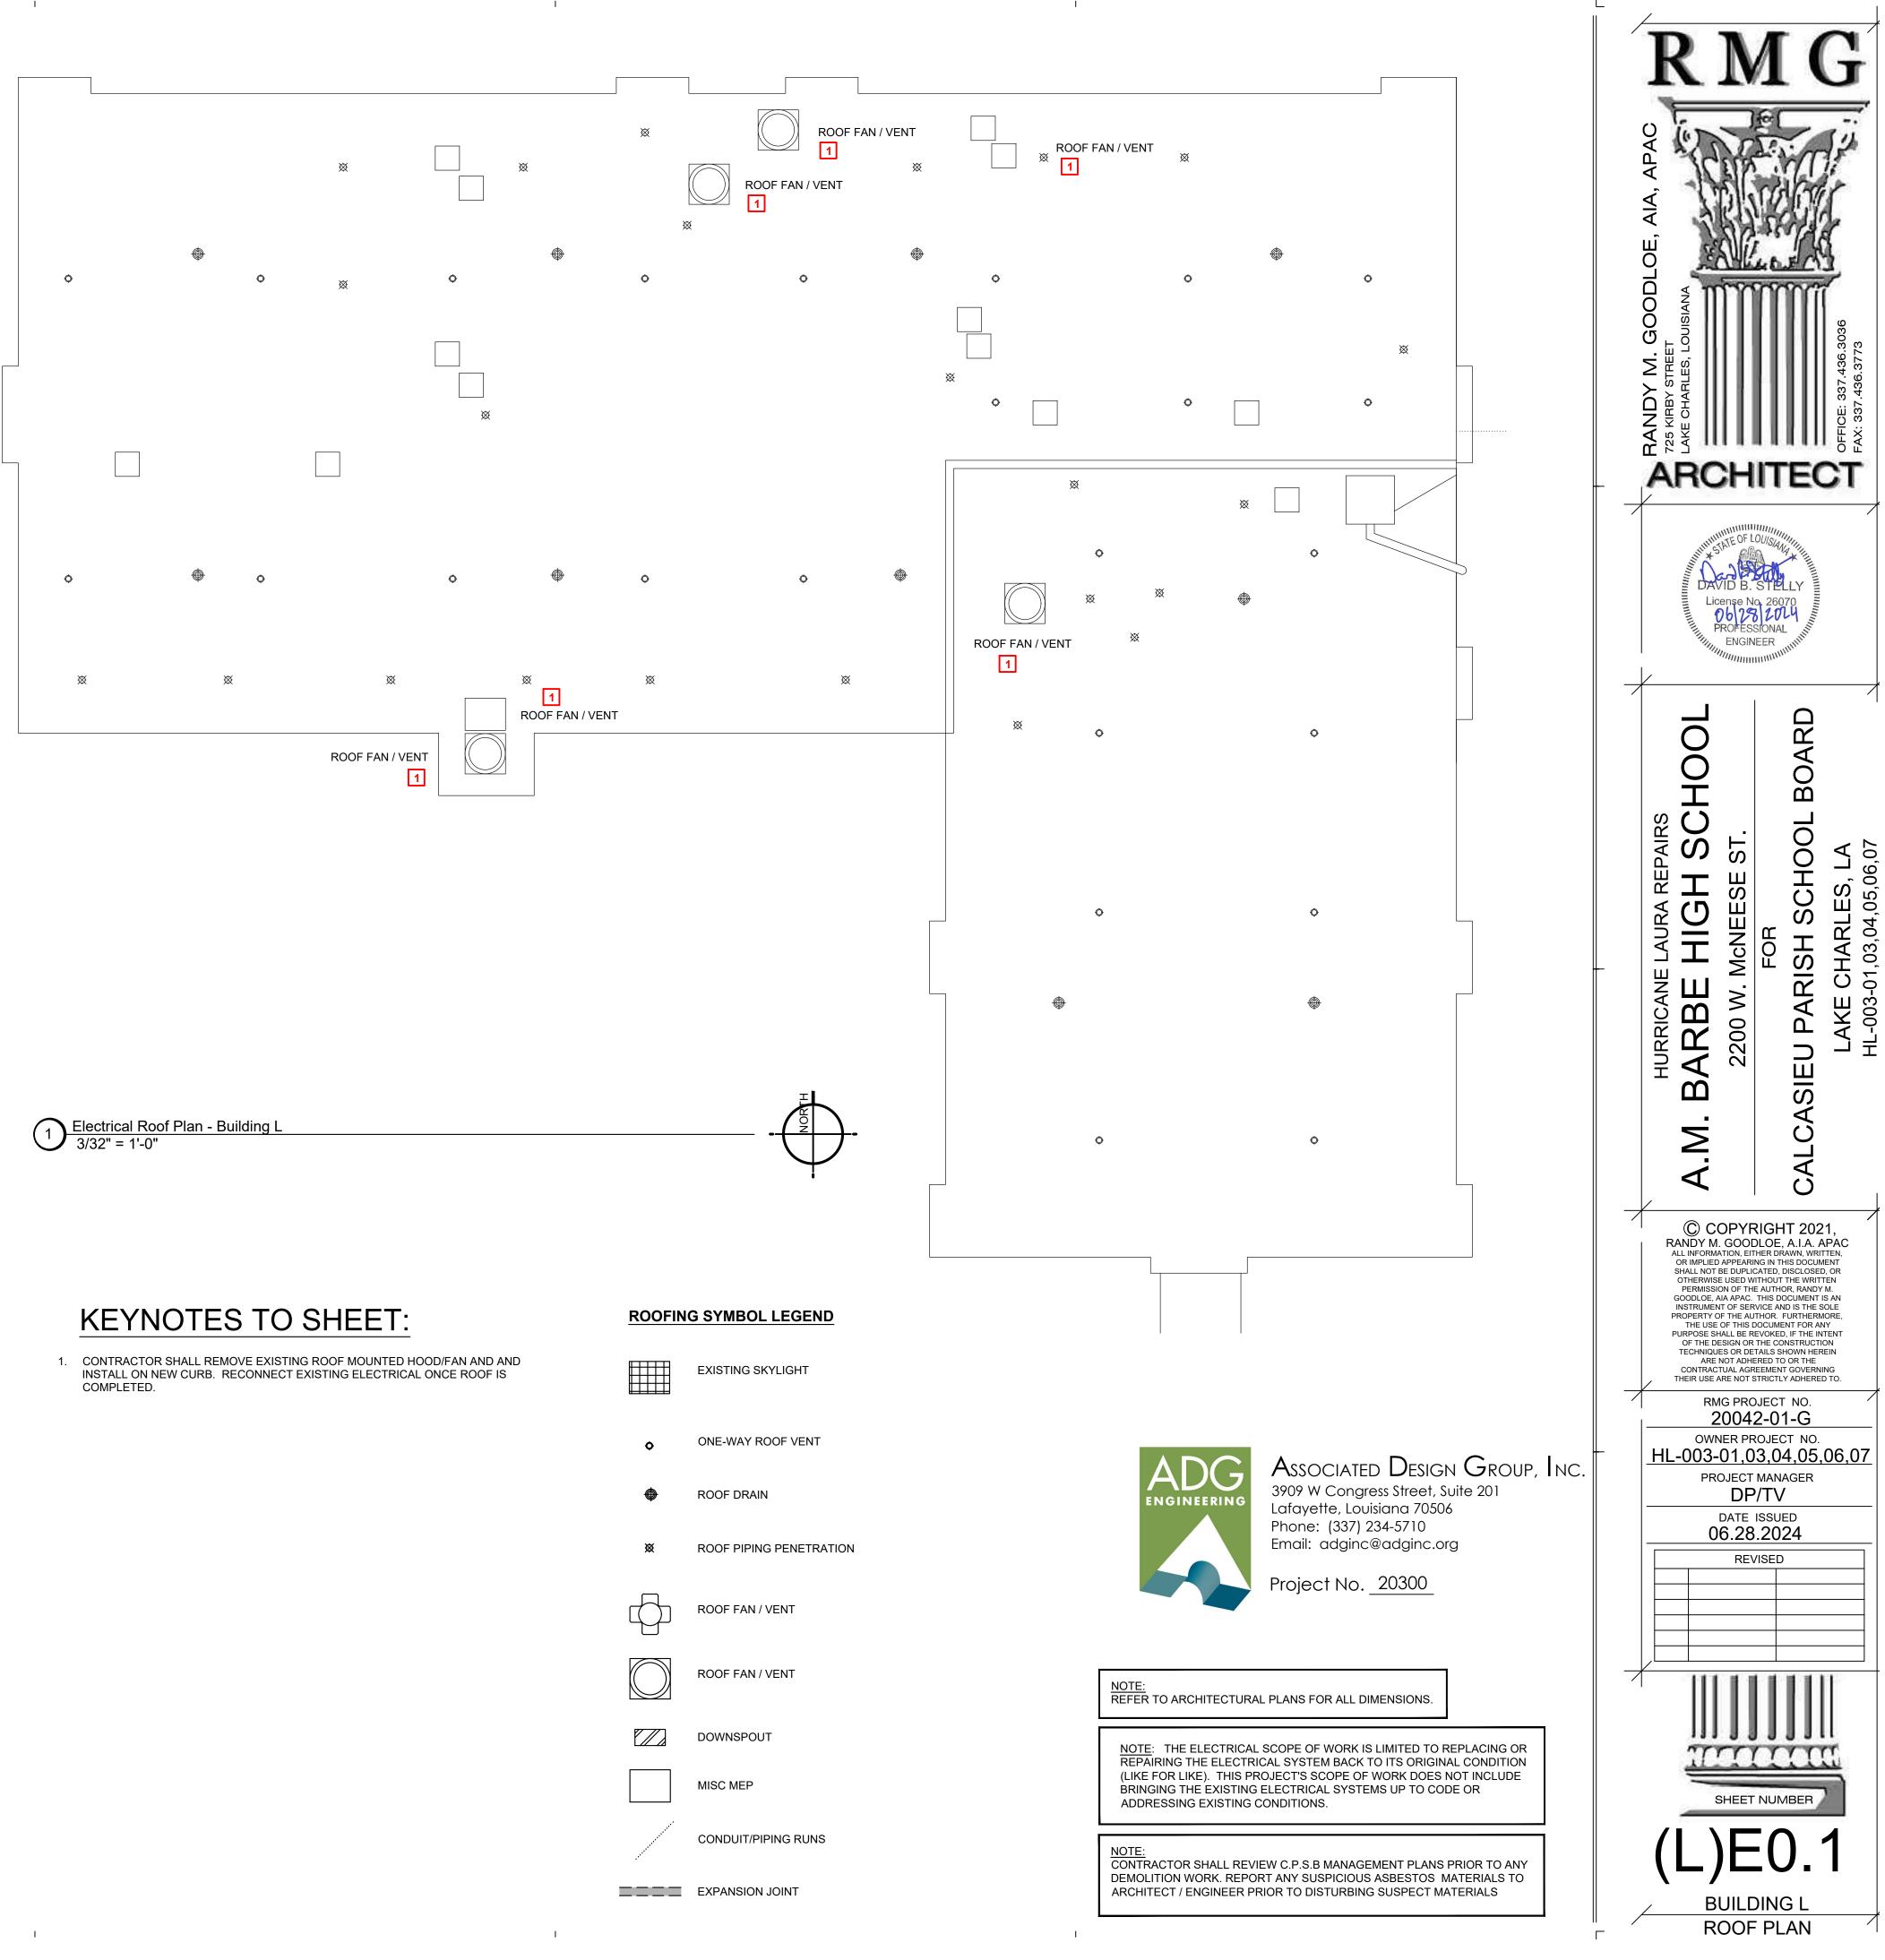



	EXISTING SKYLIGHT
¢	ONE-WAY ROOF VENT
۲	ROOF DRAIN
8	ROOF PIPING PENETRATION
	ROOF FAN / VENT
\bigcirc	ROOF FAN / VENT
	DOWNSPOUT
	MISC MEP
	CONDUIT/PIPING RUNS

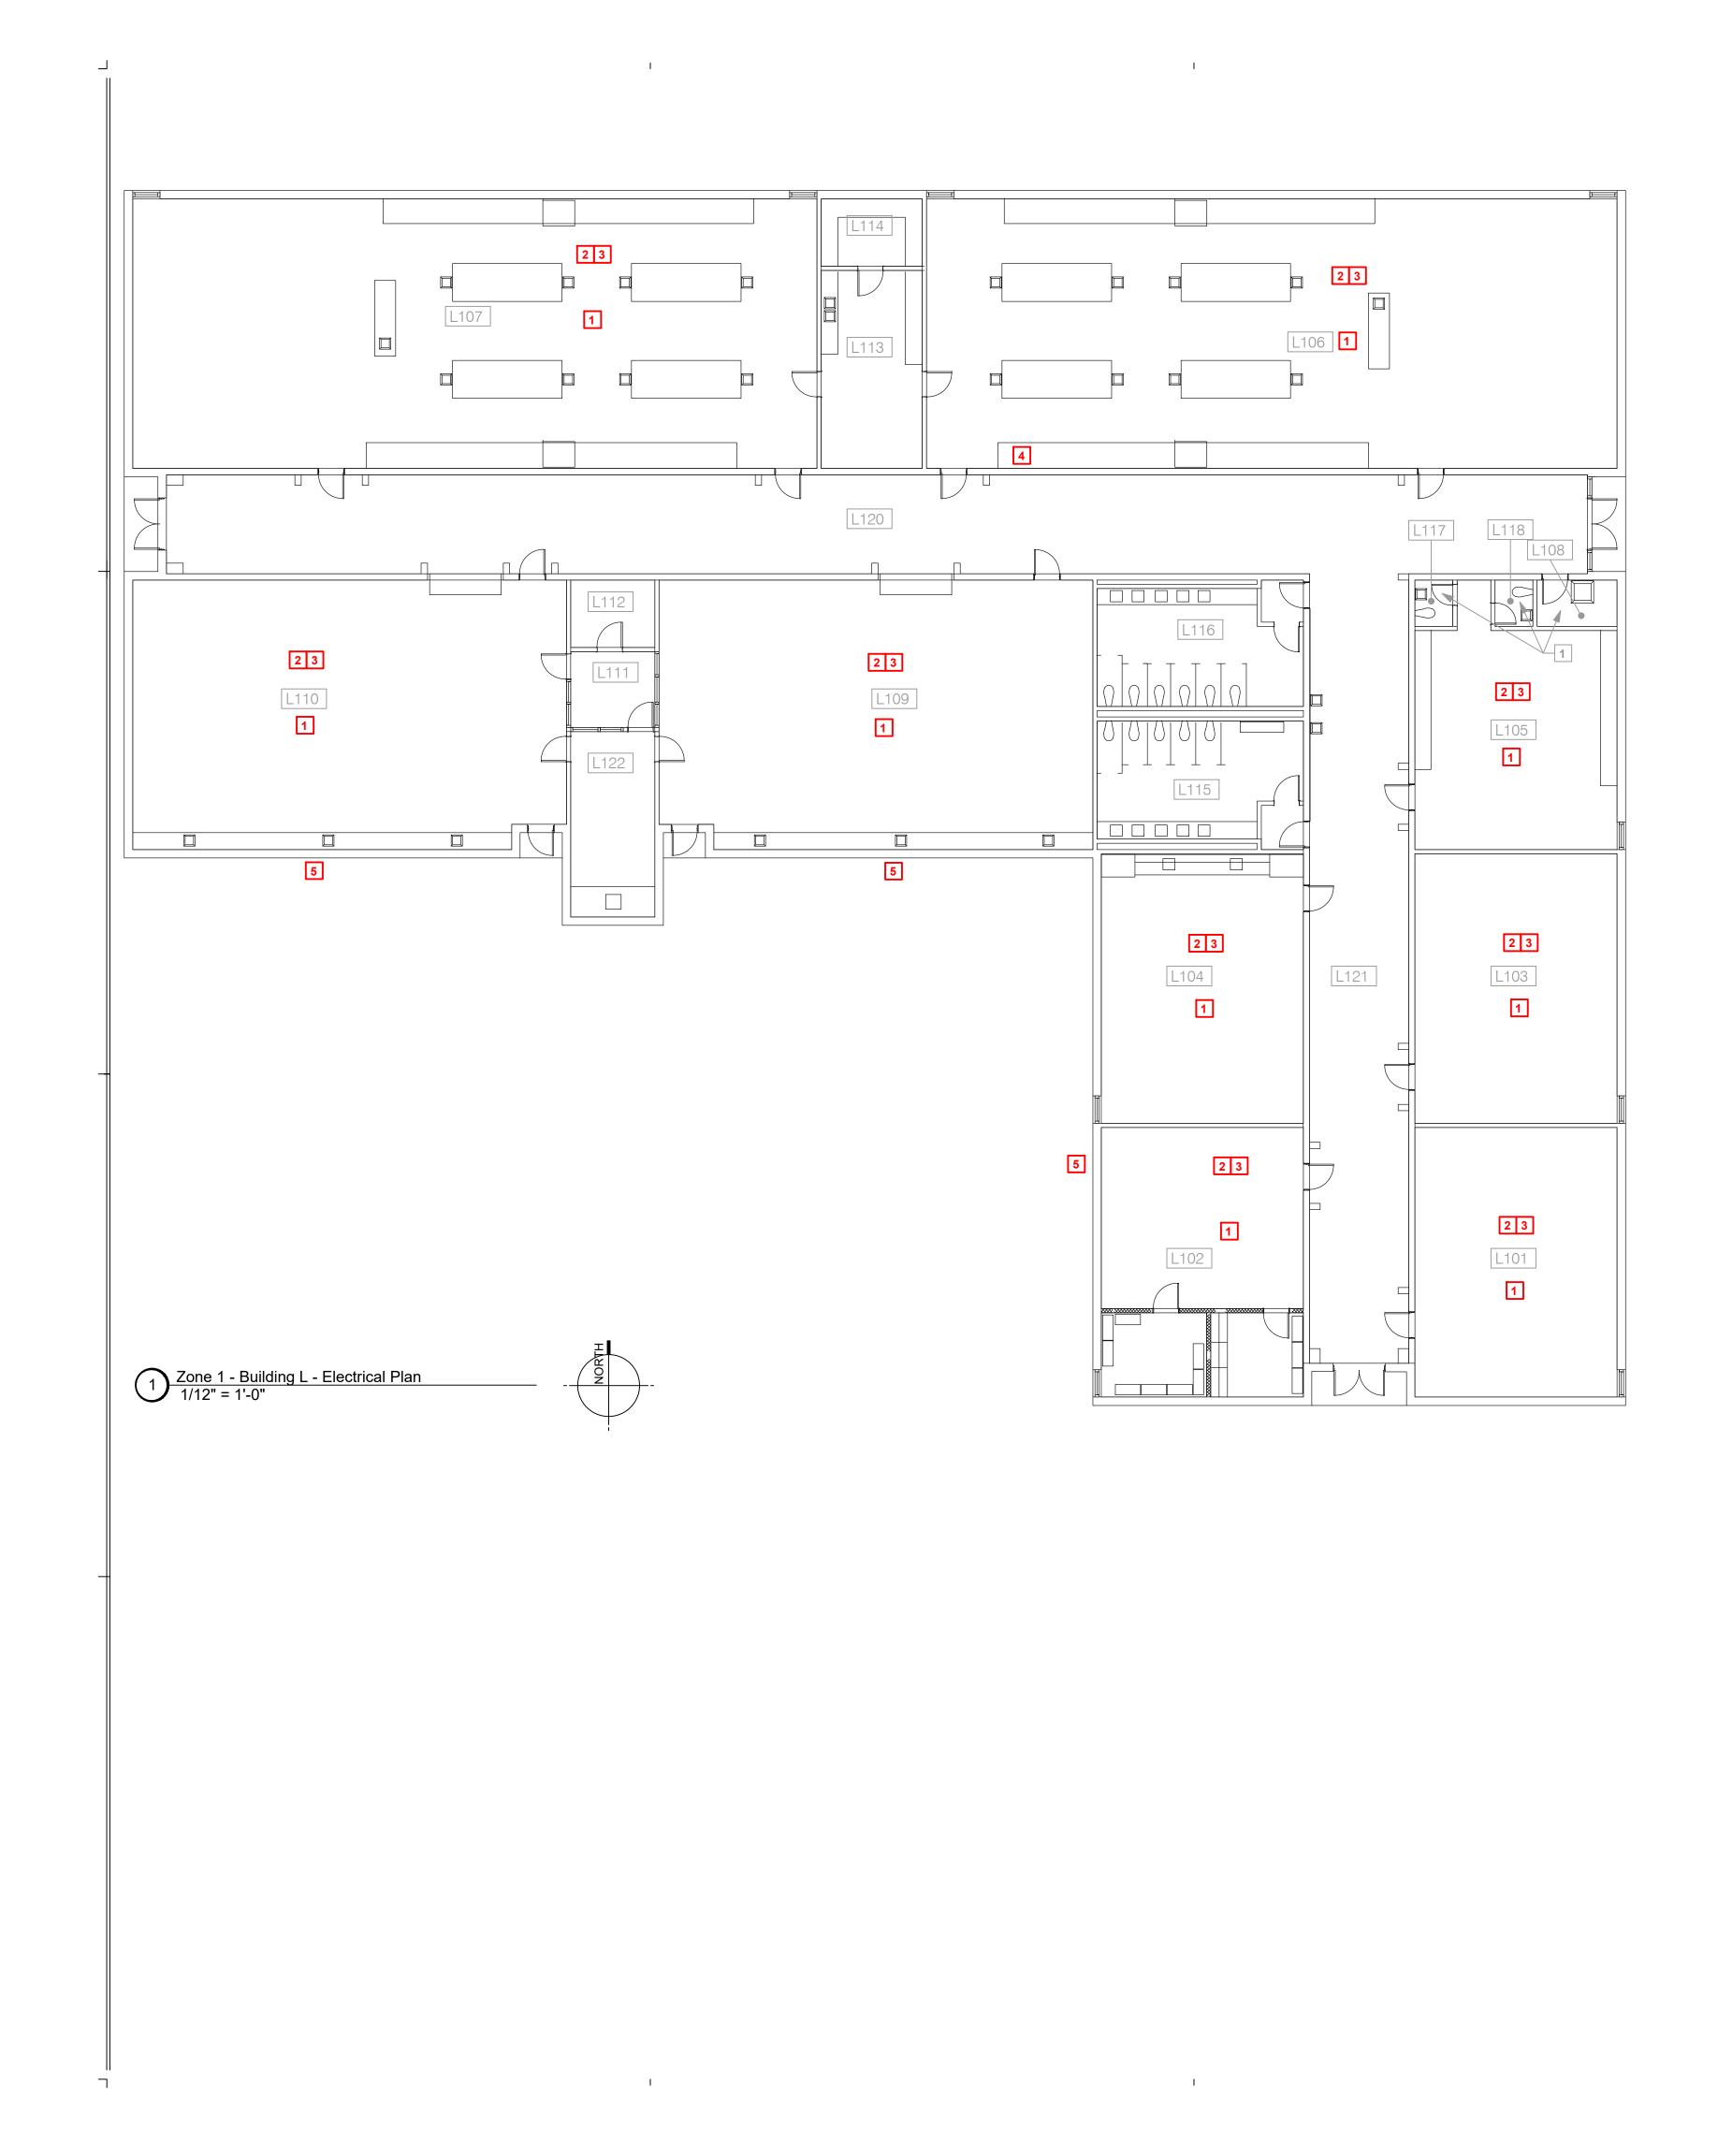

- A. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR TO ORDERING LIGHT FIXTURES.
- B. THE INTENT OF THE PLAN IS FOR EXISTING CIRCUITING TO REMAIN AND BE RE-USED. ALL EXISTING POWER WIRING SHALL BE PROTECTED DURING DEMOLITON AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- D. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF THE 2020 EDITION OF NEC.
- E. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.
- F. EXISTING LIGHTING THROUGHOUT THE BUIDING HAS BEEN REPLACED BY THE OWNER IN A PREVIOUS PROJECT. IF THERE ARE SPACES WHERE THE DRAWINGS REQUIRE CEILING REPLACEMENT, THE CONTRACTOR WILL BE REQUIRED TO REMOVE THE EXISTING FIXTURES, PROPERLY STORE THEM ONSITE (CONTAINER OR OTHER OWNER APPROVED AREA), THEN RE-INSTALL FOLLOWING REPLACEMENT OF CEILINGS WITHIN A GIVEN SPACE.
- G. ALL EXISTING LOW VOLTAGE WIRING SHALL BE PROTECTED DURING DEMOLITION AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.

NOTE: REFER TO ARCHITECTURAL DRAWINGS FOR ALL DIMENSIONS.

1

KEYNOTES:

- . ANY EXISTING CAMERAS OR WIRELESS ACCESS POINTS TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH CPSB IT DEPARTMENT. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED COMMUNICATIONS CABLING.
- 2. ANY EXISTING FIRE ALARM DEVICES TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH SYLVAN SOUND. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED FIRE ALARM WIRING.
- 3. ANY EXISTING INTERCOM DEVICES TO BE REMOVED DURING CONSTRUCTION SHALL BE COORDINATED WITH SYLVAN SOUND. DEVICES SHALL BE LABELED AND STORED FOR RE-INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR ANY CUT OR REMOVED INTERCOM WIRING.
- 4. EXISTING LOCATION OF IT RACK. CONTRACTOR IS RESPONSIBLE FOR PROTECTING IT RACK, EQUIPMENT, AND WIRING DURING CONSTRUCTION. IT RACK SHALL REMAIN OPERATIONAL THROUGHOUT CONSTRUCTION UNLESS APPROVED BY CPSB IT FOR IT TO BE POWERED DOWN. PROVIDE COVER FOR RACK TO MINIMIZE DUST AND DEBRIS WHILE AT THE SAME TIME ALLOWING COOLING AND PROPER AIRFLOW.
- CONTRACTOR SHALL DISCONNECT AND REMOVE EXISTING WALL PACKS ON THE SIDES OF THE BUILDING (1 TOTAL) AND PROVIDE NEW FIXTURES TYPE 'W'. FIXTURE TYPE 'W' SHALL BE LUMARK OR EQUAL WPMLED20B-120V. MOUNT NEW FIXTURES IN THE SAME LOCATIONS AND CONNECT TO EXISTING LIGHTING CIRCUIT. SWITCH THROUGH EXISTING PHOTOCELL. IF PHOTOCELL IS MISSING OR NOT WORKING PROVIDE NEW UNIT.

NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS


NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.


NOTE: THE ELECTRICAL SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE ELECTRICAL SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE). THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING THE EXISTING ELECTRICAL SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS.



Associated Design G_{ROUP} , Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

Project No. 20300

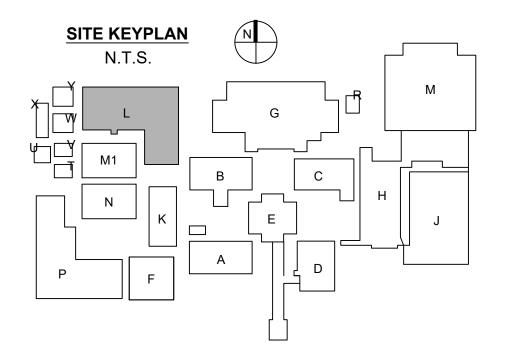


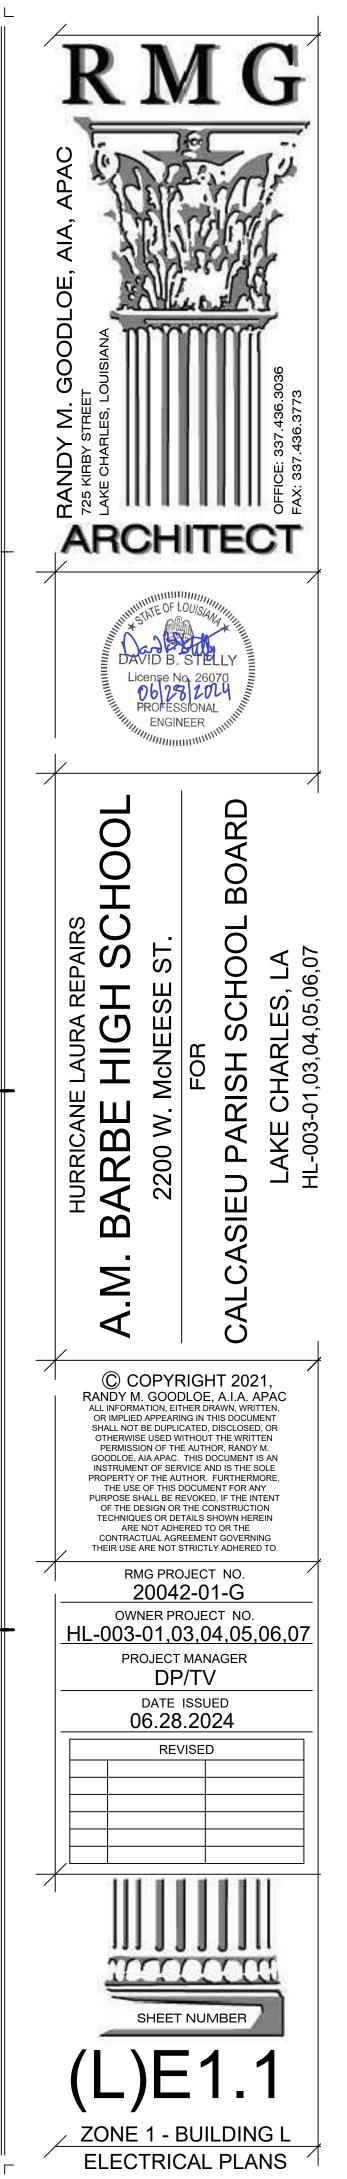


1

1

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

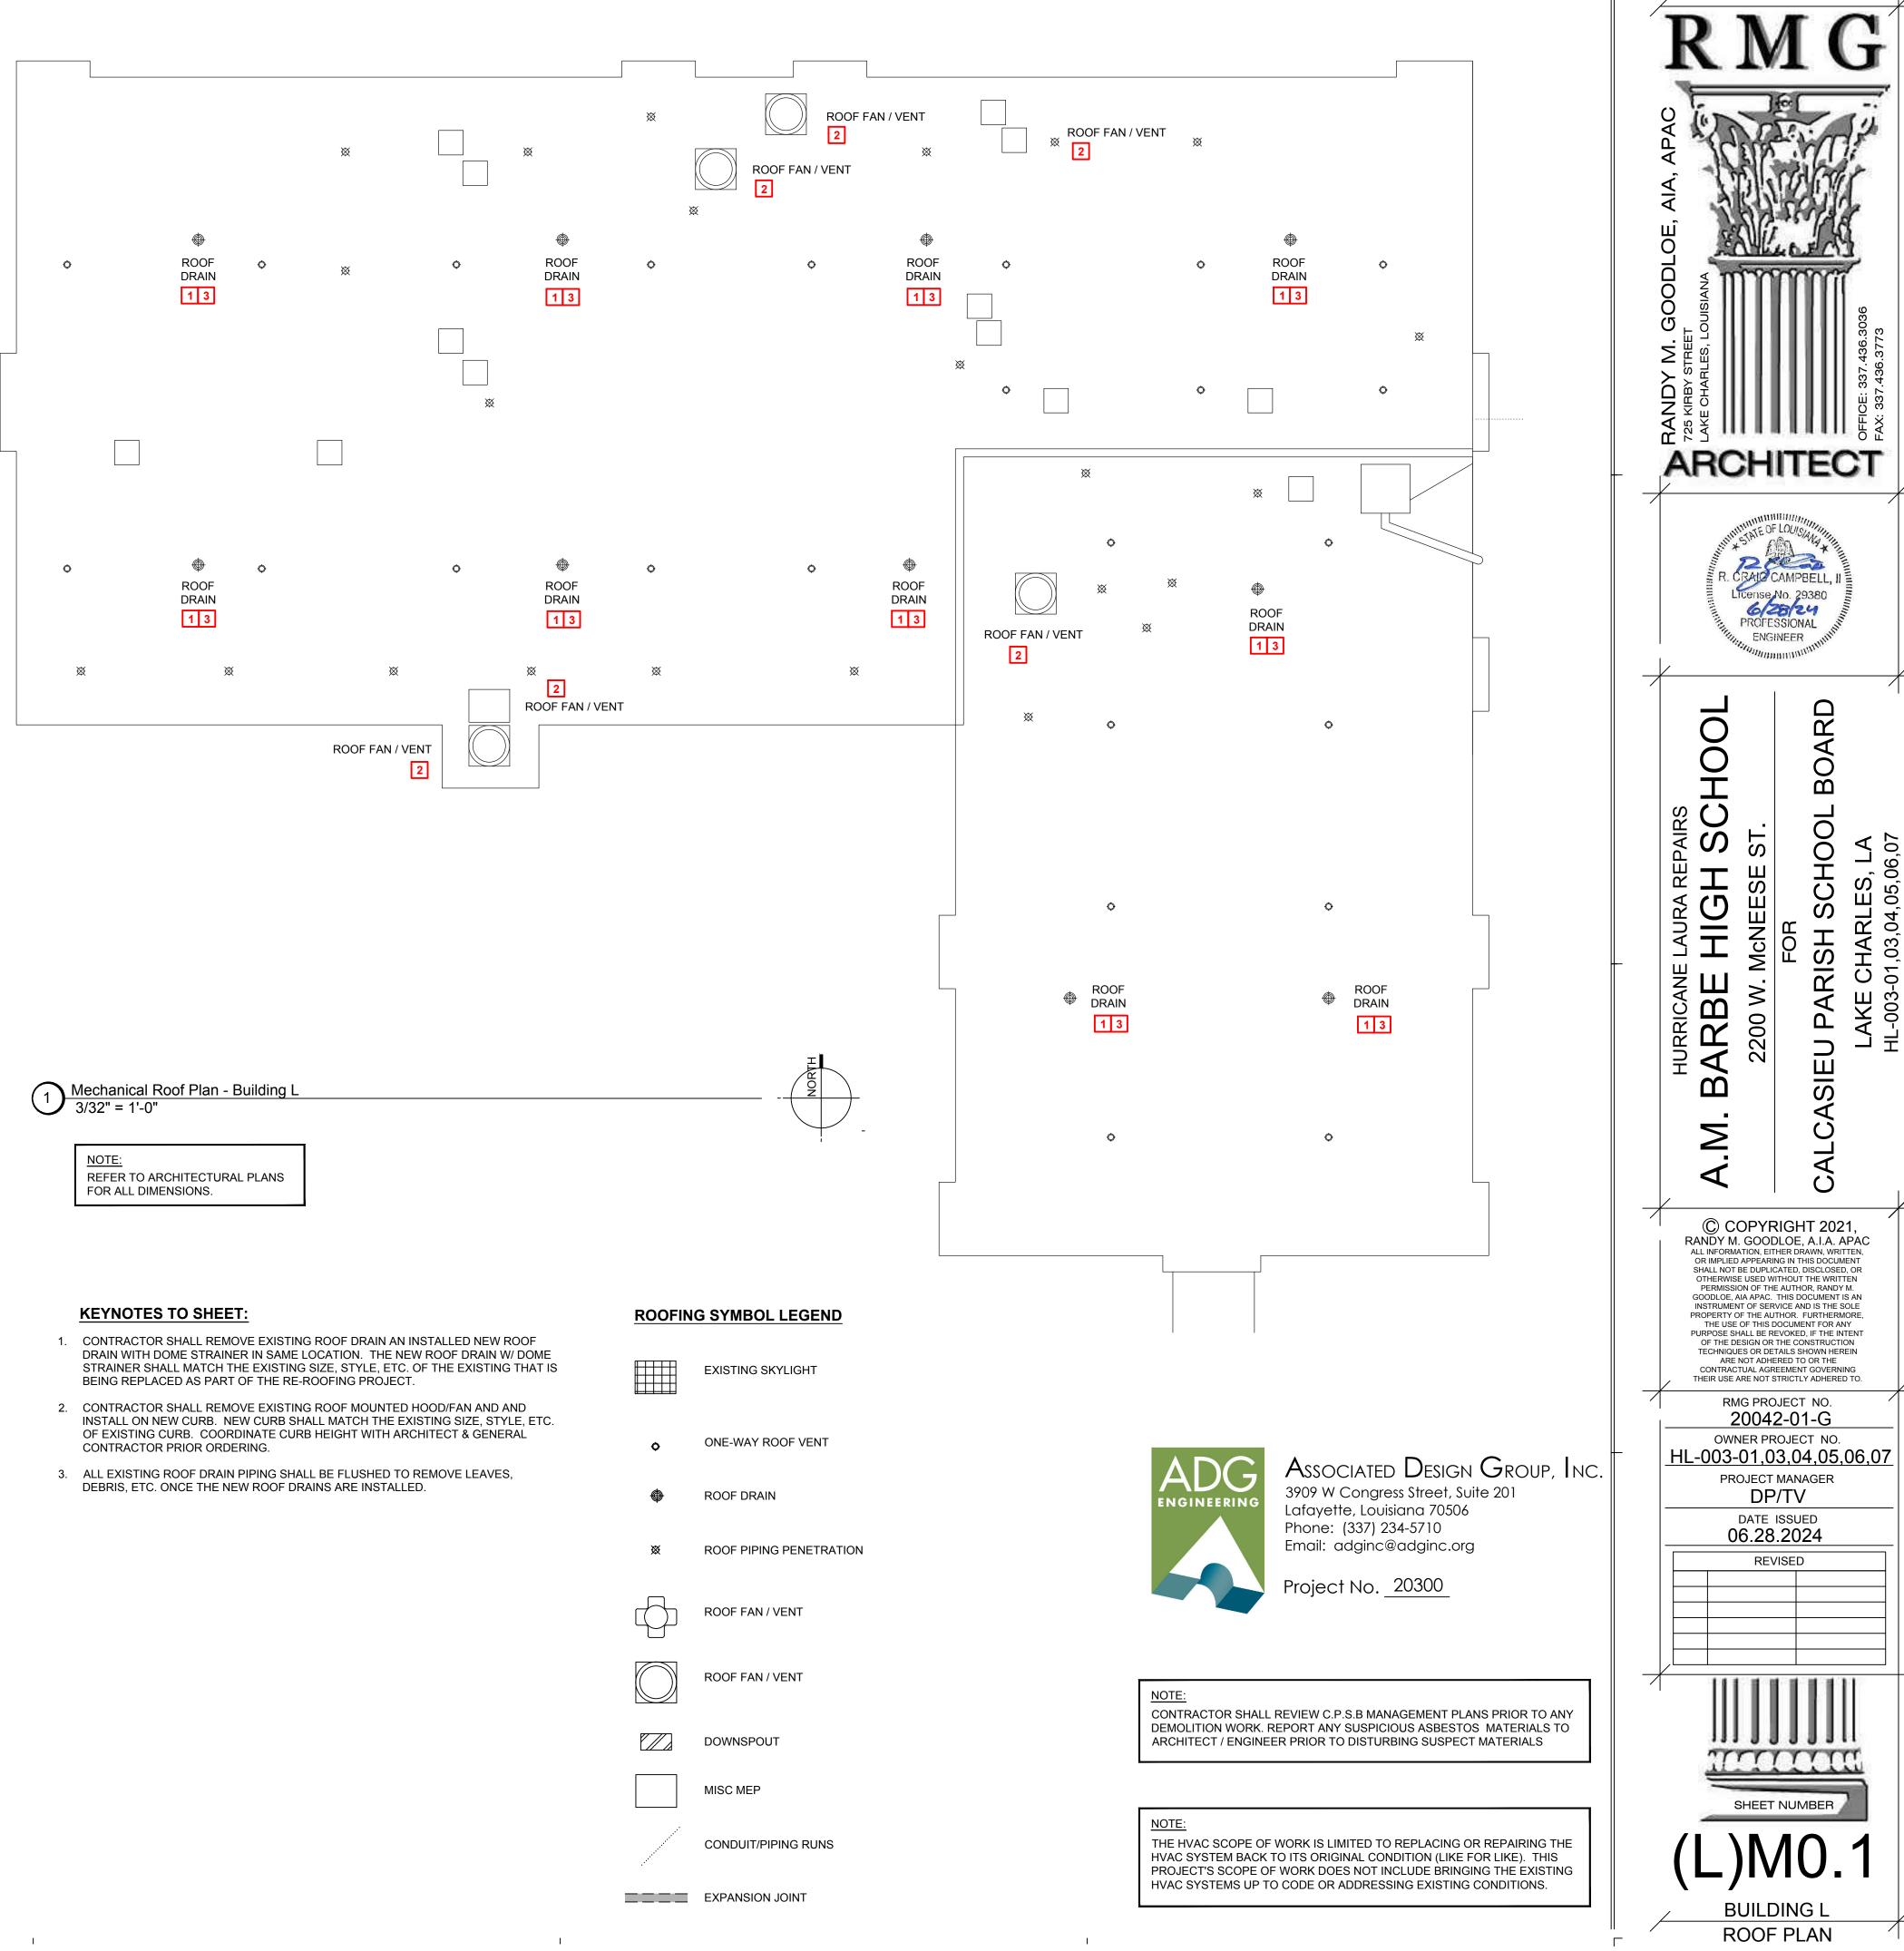

	EXISTING SKYLIGHT
٥	ONE-WAY ROOF VENT
۲	ROOF DRAIN
×	ROOF PIPING PENETRATIO
	ROOF FAN / VENT
\bigcirc	ROOF FAN / VENT
	DOWNSPOUT
	MISC MEP
	CONDUIT/PIPING RUNS

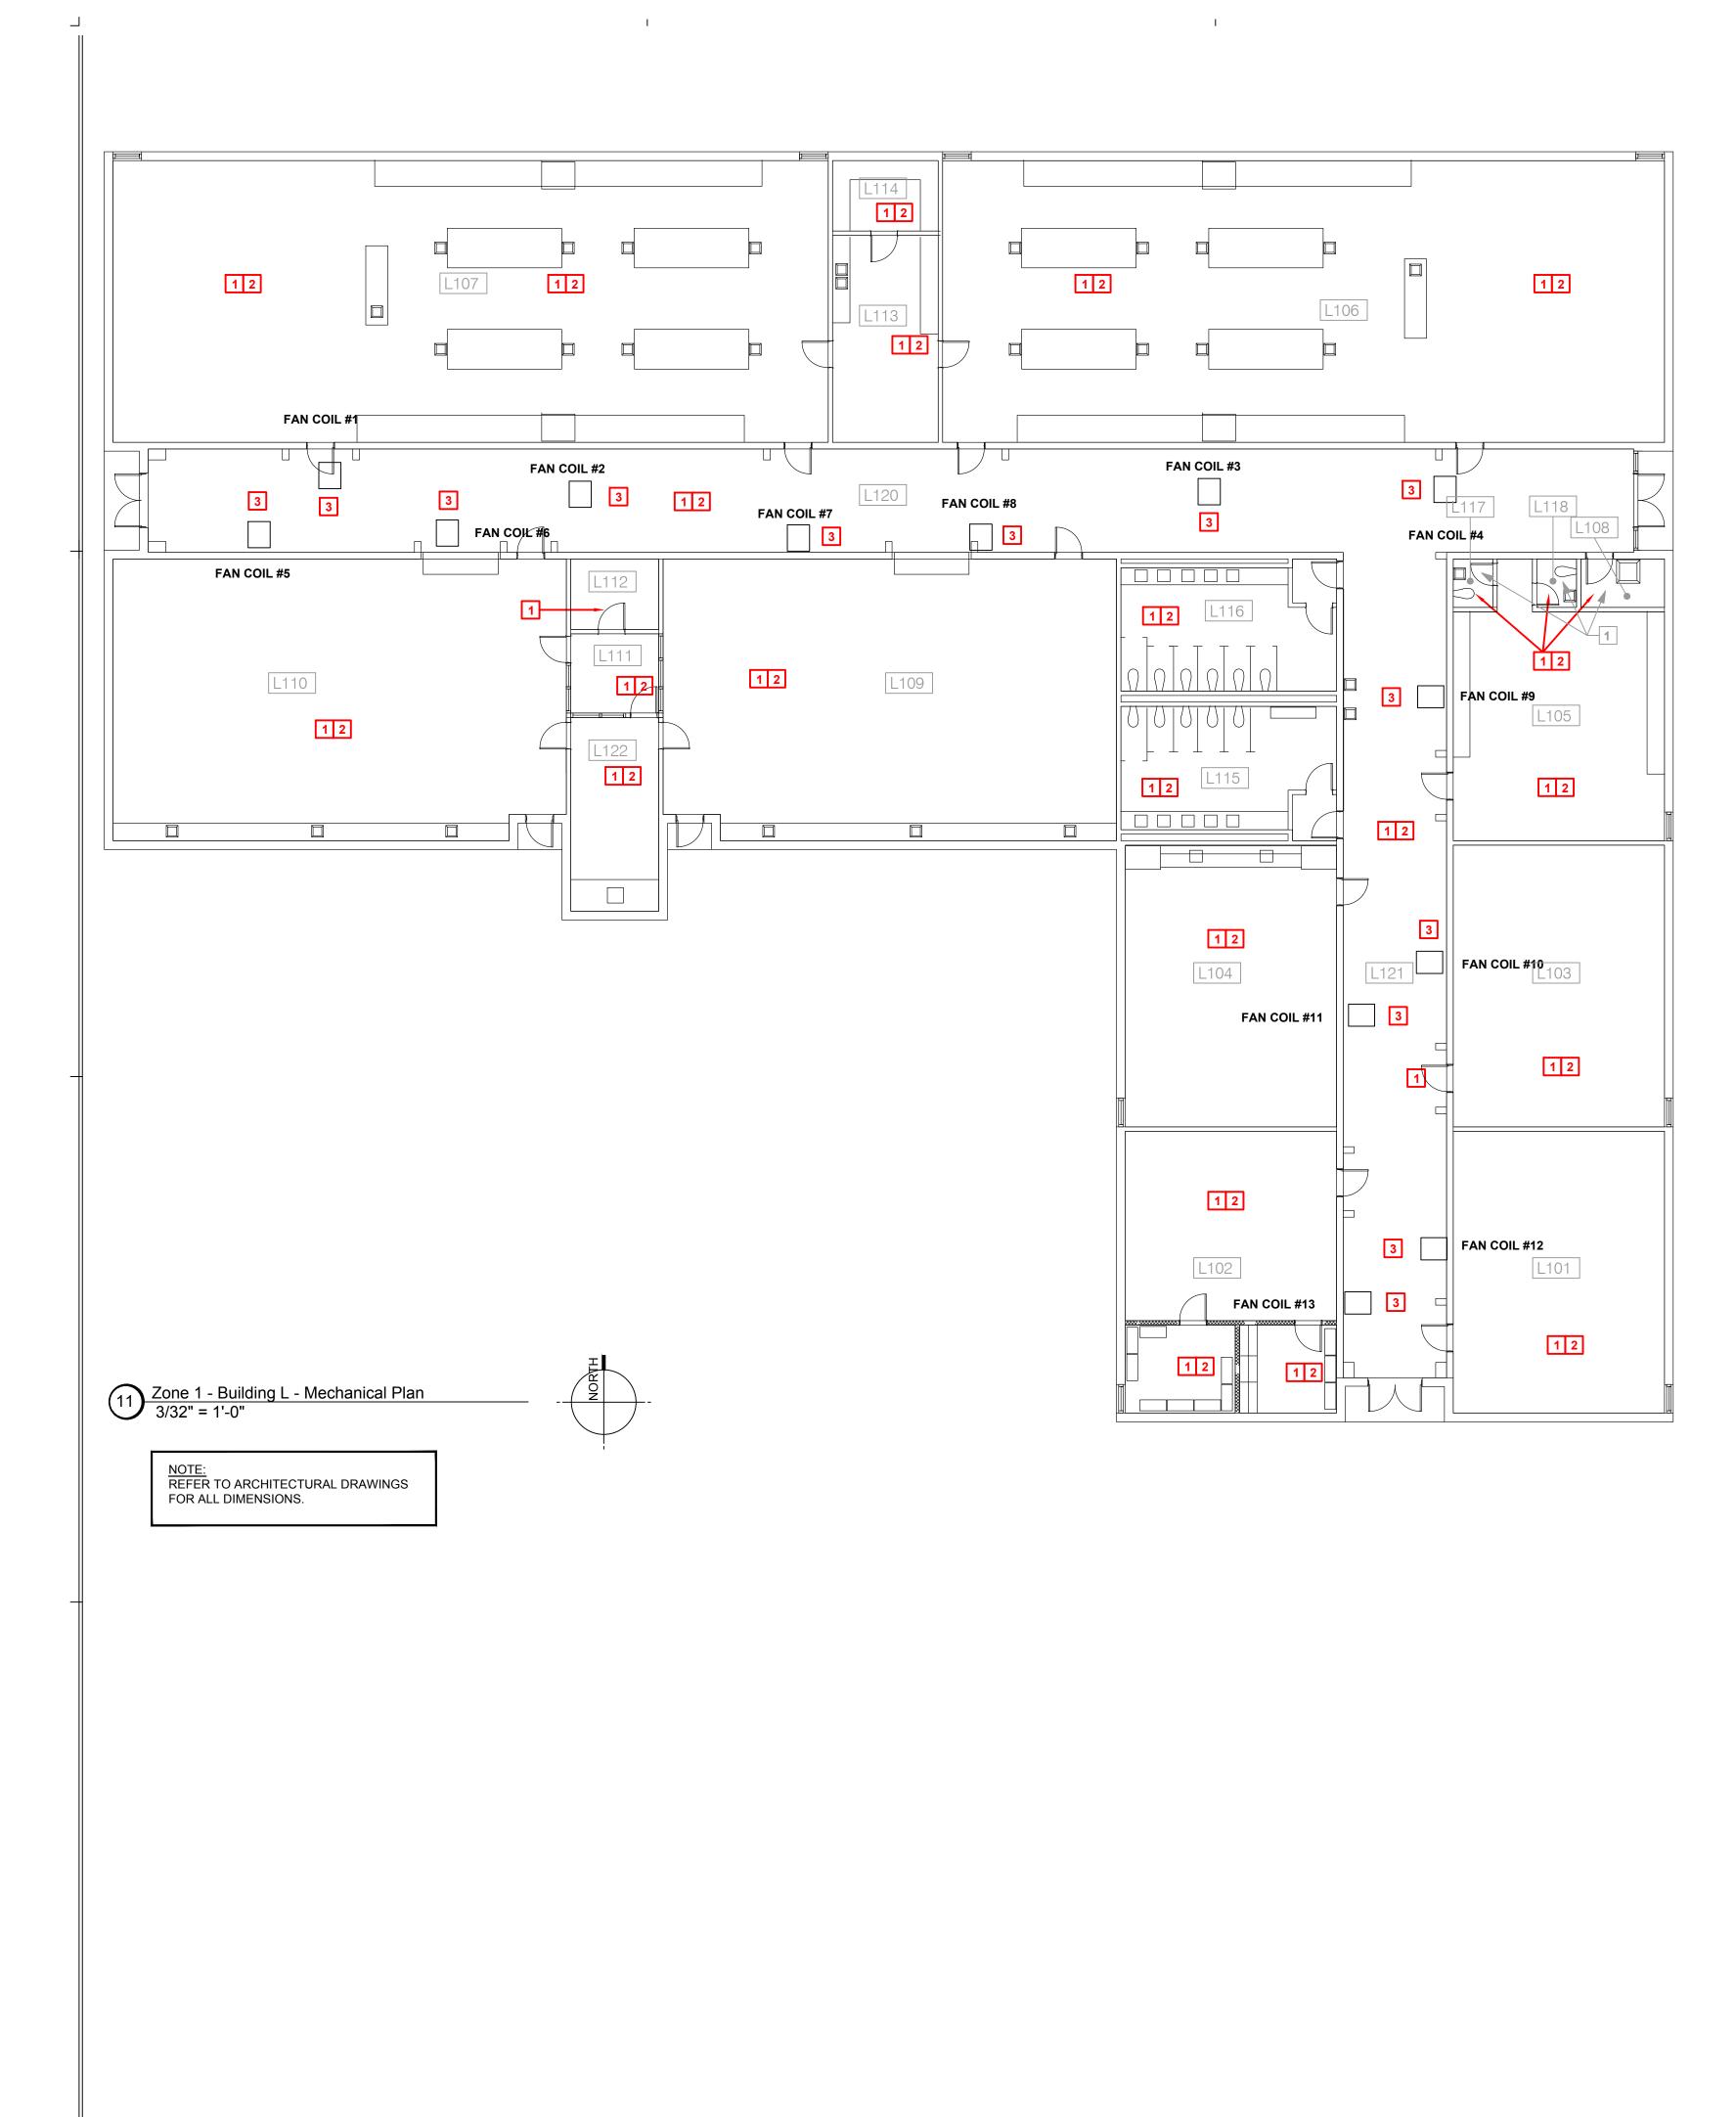

I

1

I.

GENERAL NOTES:

I

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

KEYNOTES TO SHEET:

- 1. NO INTERIOR MECHANICAL (PLUMBING & HVAC) WORK ASSOCIATED WITH THESE SPACE WITHIN THE BUILDING.
- 2. CONTRACTOR SHALL TEMPORARILY SUPPORT AND PROTECT ANY EQUIPMENT, DIFFUSERS, GRILLES, ETC. IN OR ABOVE CEILINGS OF THESE SPACES DURING THE REMOVAL AND INSTALLATION OF NEW CEILINGS. REFER TO ARCHITECTURAL PLANS FOR THOSE LOCATIONS.
- 3. EXISTING FAN COIL UNIT TO REMAIN AND CLEANED PER THE SPECIFICATIONS. REMOVE AND REPLACE EXISTING AIR HANDLING UNIT INTERIOR LINER AND CLEAN INTERIOR OF UNIT INCLUDING COILS.

<u>NOTE:</u> CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS


NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.


NOTE: THE HVAC SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE HVAC SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE) IN MOST CIRCUMSTANCES. THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING ALL THE EXISTING HVAC SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS. ALTHOUGH ALL WORK MUST COMPLY WITH FEMA CONSENSUS-BASED, "LATEST PUBLISHED EDITIONS" OF CODES NOT NECESSARILY THOSE CODES ADOPTED BY THE LOCAL MUNICIPALITY.




1

Associated Design Group, Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

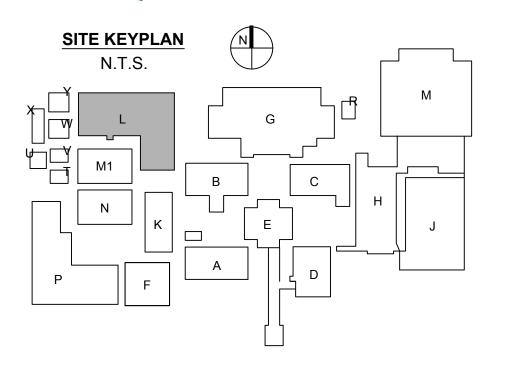

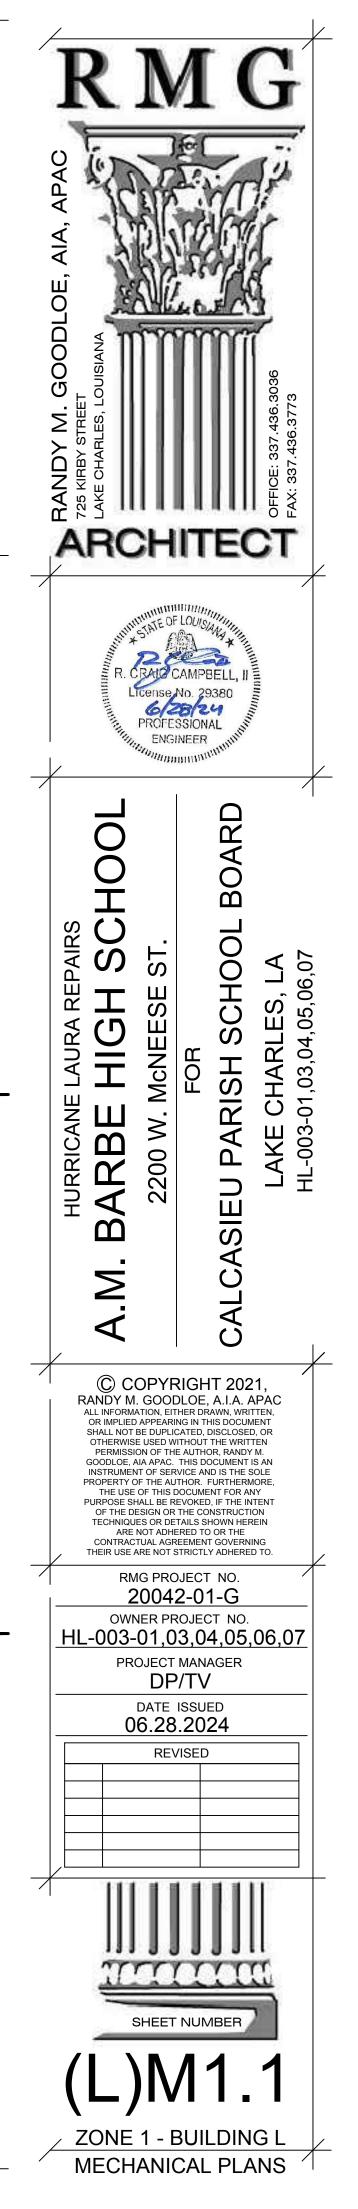

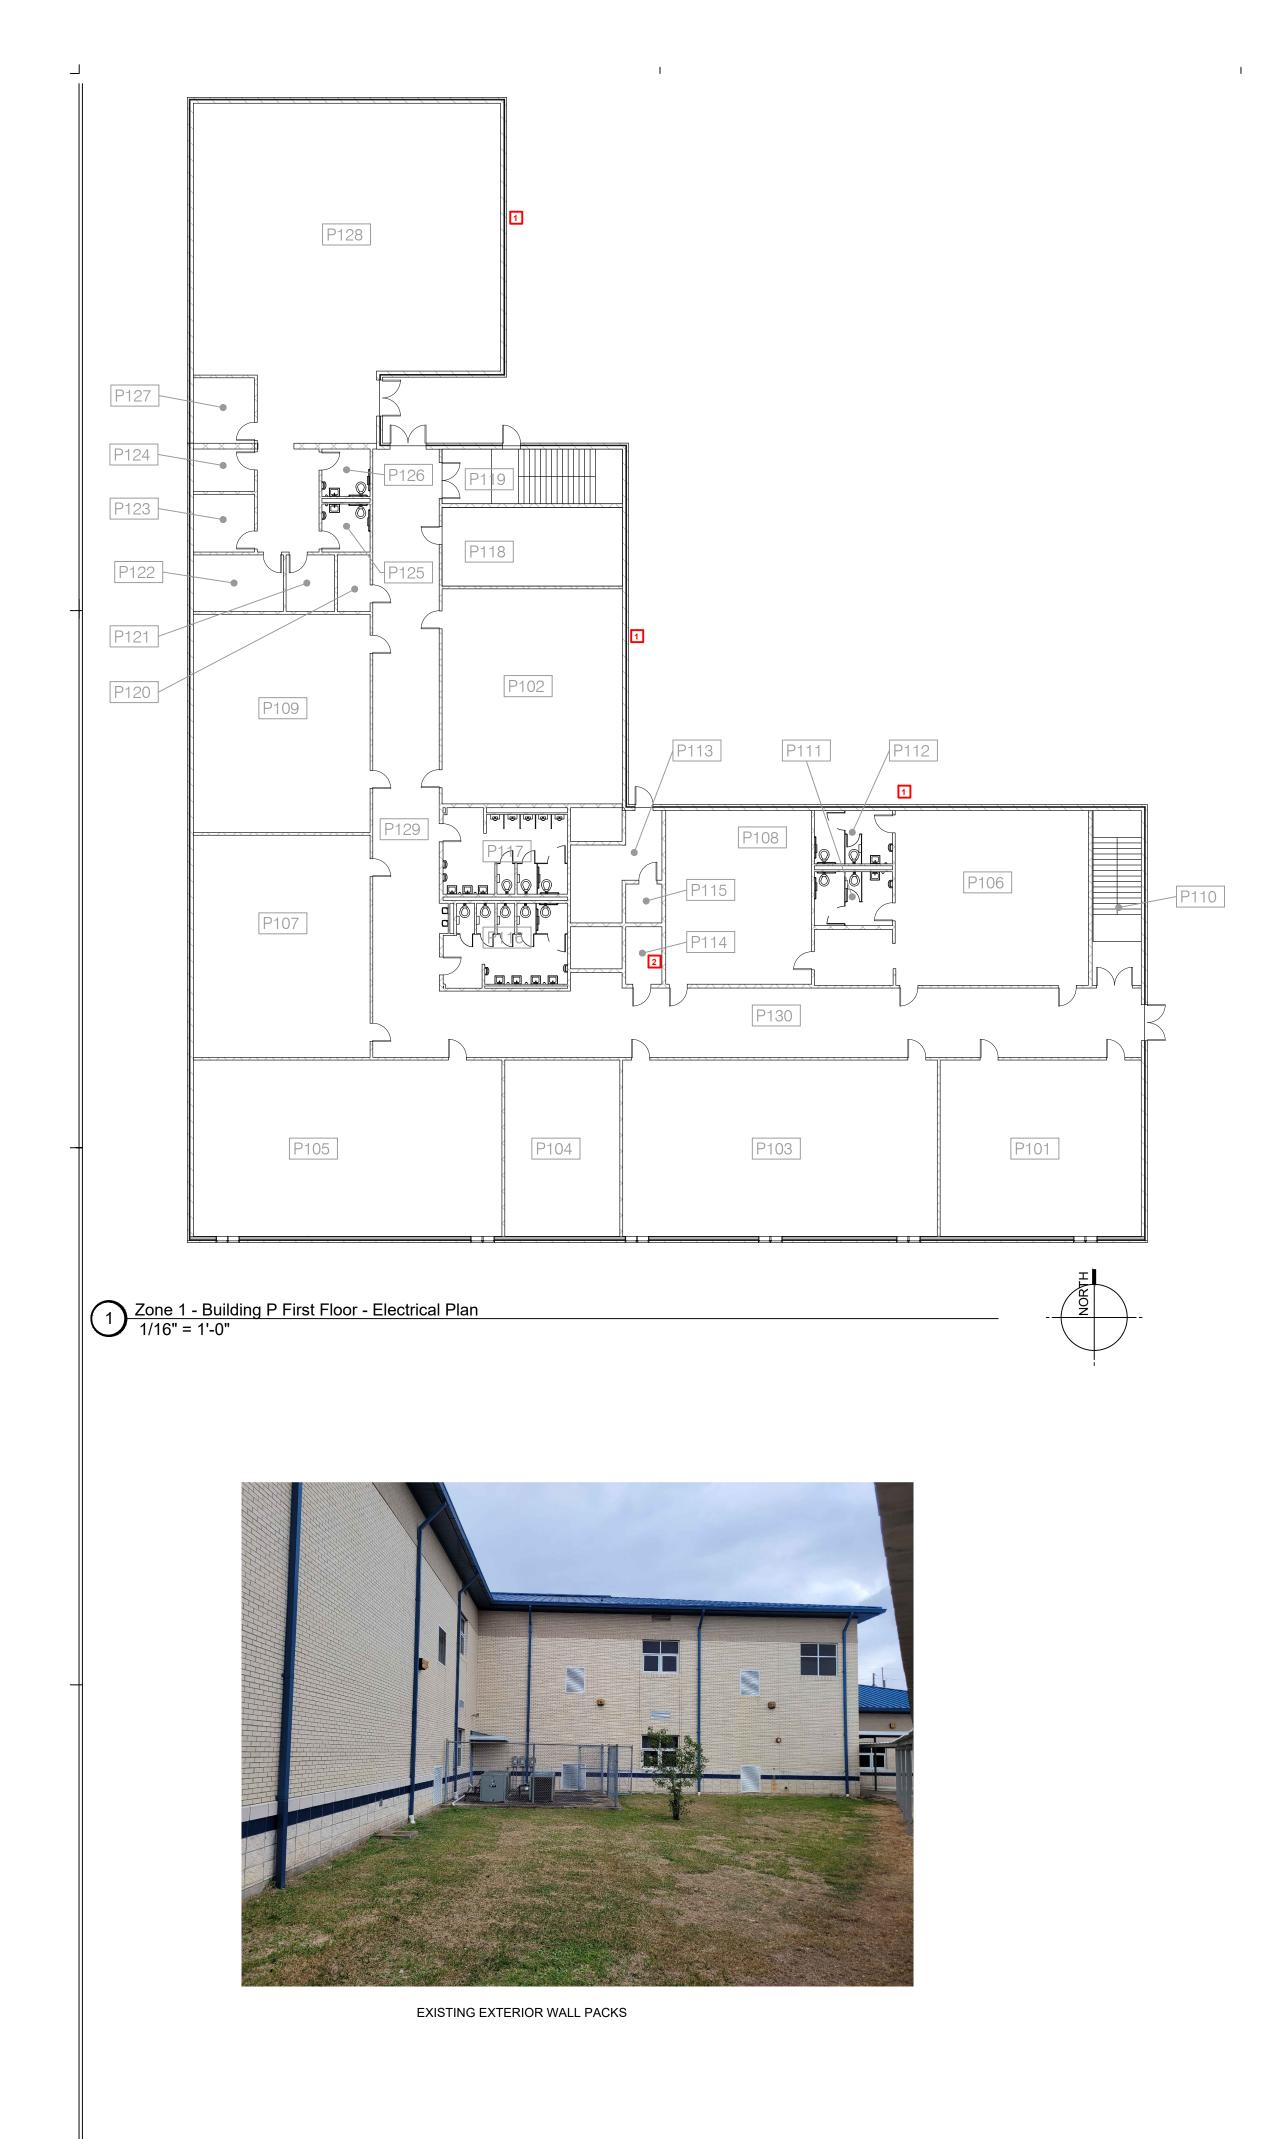

I.

GENERAL NOTES:


- A. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN THE FIELD PRIOR TO ORDERING LIGHT FIXTURES.
- B. THE INTENT OF THE PLAN IS FOR EXISTING CIRCUITING TO REMAIN AND BE RE-USED. ALL EXISTING POWER WIRING SHALL BE PROTECTED DURING DEMOLITON AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.
- C. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- D. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF THE 2020 EDITION OF NEC.
- E. PRIOR TO DISCONNECTING, AND REMOVING OF ANY ELECTRICAL SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA. COORDINATE WITH OWNER FOR ALL ELECTRICAL SHUT DOWNS AT LEAST 2 WORKING DAYS PRIOR TO WORK.
- F. EXISTING LIGHTING THROUGHOUT THE BUIDING HAS BEEN REPLACED BY THE OWNER IN A PREVIOUS PROJECT. IF THERE ARE SPACES WHERE THE DRAWINGS REQUIRE CEILING REPLACEMENT. THE CONTRACTOR WILL BE REQUIRED TO REMOVE THE EXISTING FIXTURES, PROPERLY STORE THEM ONSITE (CONTAINER OR OTHER OWNER APPROVED AREA), THEN RE-INSTALL FOLLOWING REPLACEMENT OF CEILINGS WITHIN A GIVEN SPACE.
- G. ALL EXISTING LOW VOLTAGE WIRING SHALL BE PROTECTED DURING DEMOLITION AND AVAILABLE FOR RE-USE. ANY WIRING REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED AT CONTRACTOR'S EXPENSE.

NOTE: REFER TO ARCHITECTURAL DRAWINGS FOR ALL DIMENSIONS.

1

KEYNOTES:

- CONTRACTOR SHALL DISCONNECT AND REMOVE EXISTING WALL PACKS ON THE SIDES OF THE BUILDING (3 TOTAL) AND PROVIDE NEW FIXTURES TYPE 'W'. FIXTURE TYPE 'W' SHALL BE LUMARK OR EQUAL WPMLED20B-120V. MOUNT NEW FIXTURES IN THE SAME LOCATIONS AND CONNECT TO EXISTING LIGHTING CIRCUIT. SWITCH THROUGH EXISTING PHOTOCELL. IF PHOTOCELL IS MISSING OR NOT WORKING PROVIDE NEW UNIT.
- 2. EXISTING LOCATION OF IT RACK. CONTRACTOR IS RESPONSIBLE FOR PROTECTING IT RACK, EQUIPMENT, AND WIRING DURING CONSTRUCTION. IT RACK SHALL REMAIN OPERATIONAL THROUGHOUT CONSTRUCTION UNLESS APPROVED BY CPSB IT FOR IT TO BE POWERED DOWN. PROVIDE COVER FOR RACK TO MINIMIZE DUST AND DEBRIS WHILE AT THE SAME TIME ALLOWING COOLING AND PROPER AIRFLOW.




NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.


NOTE: THE ELECTRICAL SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE ELECTRICAL SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE). THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING THE EXISTING ELECTRICAL SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS.




Associated Design Group, Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

Project No. 20300

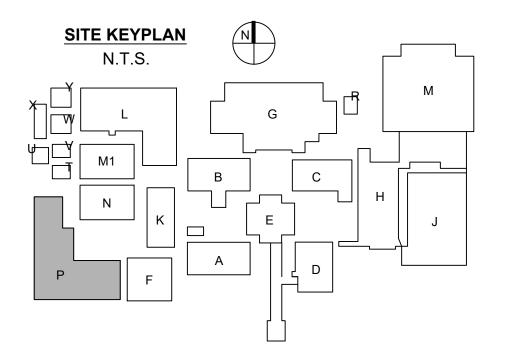

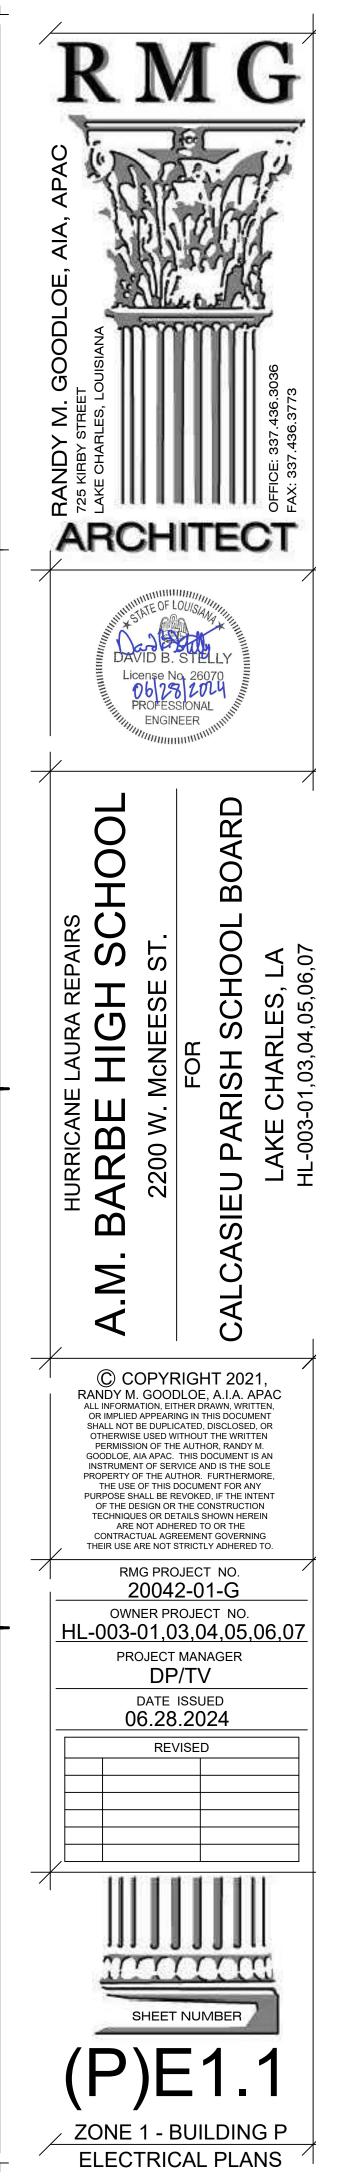

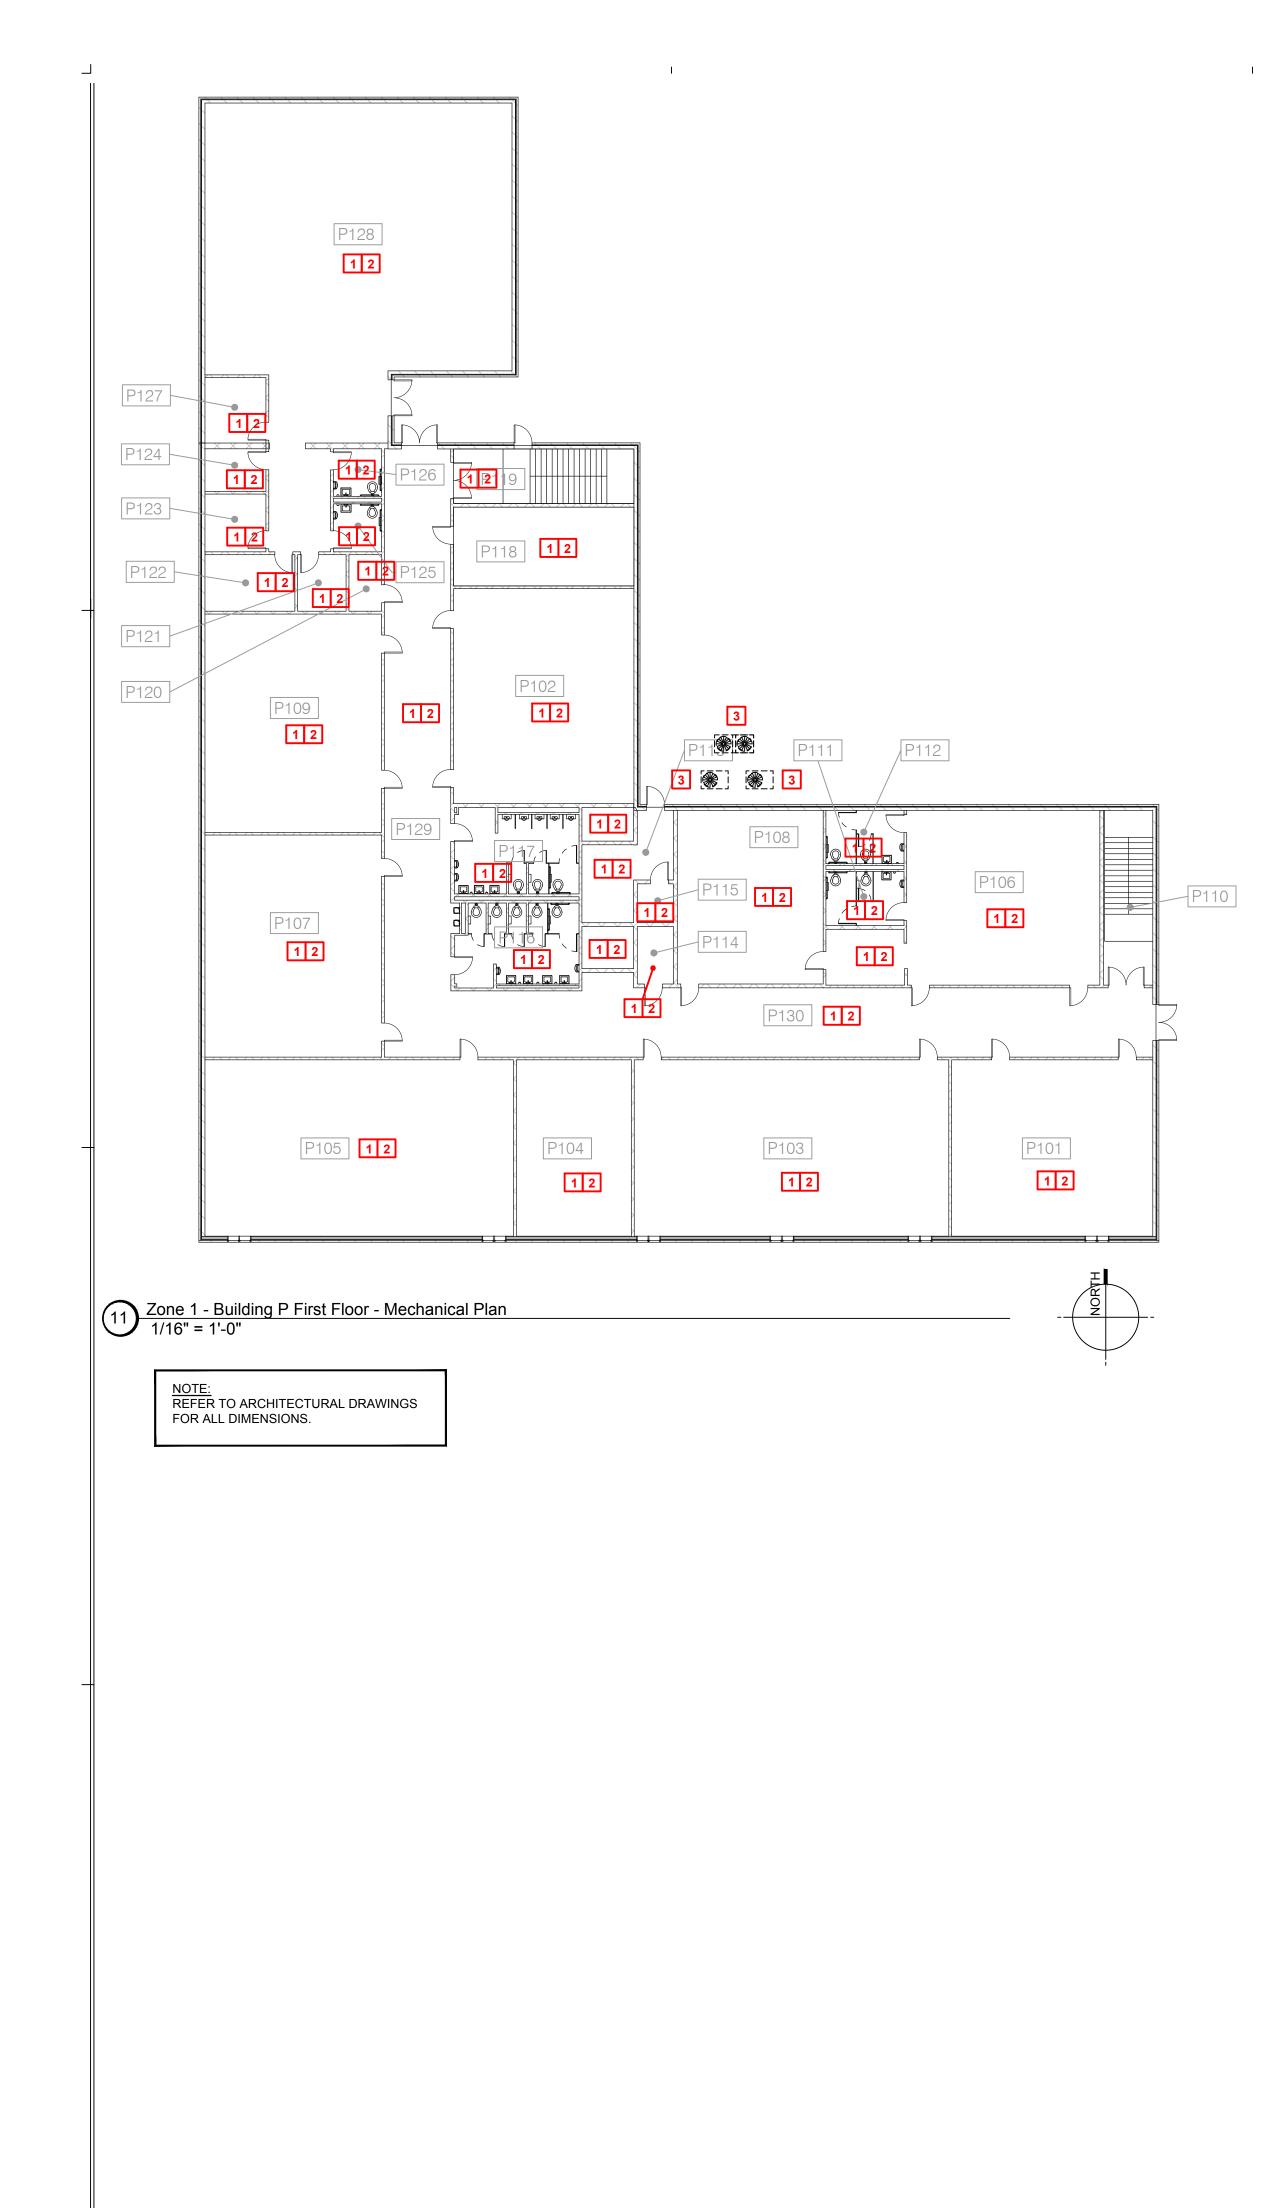

I

Ι

1

GENERAL NOTES:

1

- A. CONTRACTOR SHALL FIELD VERIFY EXISTING EQUIPMENT TAGS (WHERE POSSIBLE) IN FIELD PRIOR TO DEMOLITION. COORDINATE ALL SITE VISITS, THROUGH GENERAL CONTRACTOR AND C.P.S.B.. CONTRACTOR WEAR REQUIRED PERSONAL PROTECTIVE GEAR (PPE) SPECIFICALLY REQUIRED FOR EACH BUILDING.
- B. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DESCREPANCIES IDENTIFED IN THE FIELD PRIOR TO FABRICATING DUCTWORK OR ORDERING EQUIPMENT.
- C. CONTRACTOR SHALL PROVIDE TESTING AND BALANCING OF ALL HVAC SYSTEMS WHICH WERE REPLACED, MODIFIED AND/OR CLEANED.
- D. ALL WORK SHALL COMPLY WITH LOCAL, STATE, AND FEDERAL CODES TO THE SATISFACTION OF CODE AUTHORITIES HAVING JURISDICTION.
- E. ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF NFPA 90A & 101, THE CLEAN AIR ACT AND THE AMERICANS WITH DISABILITIES ACT.
- F. PRIOR TO DRAINING, DISCONNECTING, AND REMOVING OF ANY SERVICES IN THE DESIGNATED AREAS SHOWN, THE CONTRACTOR MUST ENSURE THAT THE SERVICES REMOVED DO NOT AFFECT THE NORMAL OPERATION OF AREAS OUTSIDE THE CONSTRUCTION AREA.
- G. VERIFY ADEQUATE SPACE AVAILABLE PER MANUFACTURER'S RECOMMENDATIONS. COORDINATE CLEARANCE REQUIREMENTS OF ALL MECHANICAL EQUIPMENT.

KEYNOTES TO SHEET:

- 1. NO INTERIOR MECHANICAL (PLUMBING & HVAC) WORK ASSOCIATED WITH THESE SPACE WITHIN THE BUILDING.
- 2. CONTRACTOR SHALL TEMPORARILY SUPPORT AND PROTECT ANY EQUIPMENT, DIFFUSERS, GRILLES, ETC. IN OR ABOVE CEILINGS OF THESE SPACES DURING THE REMOVAL AND INSTALLATION OF NEW CEILINGS. REFER TO ARCHITECTURAL PLAN P01 BLDG P.
- 3. THE COILS OF THE EXISTING CONDENSING UNIT APPEARED TO BE DAMAGED FROM FLYING DEBRIS. CONTRACTOR SHALL COMB OUT COILS AND VERIFY PROPER OPERATION OF UNIT.

NOTE: CONTRACTOR SHALL REVIEW C.P.S.B MANAGEMENT PLANS PRIOR TO ANY DEMOLITION WORK. REPORT ANY SUSPICIOUS ASBESTOS MATERIALS TO ARCHITECT / ENGINEER PRIOR TO DISTURBING SUSPECT MATERIALS

NOTE: THESE DRAWINGS ARE COPIES OF THE ORIGINAL CONSTRUCTION DOCUMENTS WITH NOTES ADDED TO DESCRIBE THE SCOPE OF WORK FOR THE HURRICANE LAURA REPAIR PROJECT. CONTRACTOR SHALL NOTIFY ARCHITECT/ENGINEER OF ANY DISCREPANCIES IDENTIFIED IN FIELD PRIOR TO ORDERING EQUIPMENT OR INSTALLATION.

<u>NOTE</u>: THE HVAC SCOPE OF WORK IS LIMITED TO REPLACING OR REPAIRING THE HVAC SYSTEM BACK TO ITS ORIGINAL CONDITION (LIKE FOR LIKE) IN MOST CIRCUMSTANCES. THIS PROJECT'S SCOPE OF WORK DOES NOT INCLUDE BRINGING ALL THE EXISTING HVAC SYSTEMS UP TO CODE OR ADDRESSING EXISTING CONDITIONS. ALTHOUGH ALL WORK MUST COMPLY WITH FEMA CONSENSUS-BASED, "LATEST PUBLISHED EDITIONS" OF CODES NOT NECESSARILY THOSE CODES ADOPTED BY THE LOCAL MUNICIPALITY.



1

Associated Design Group, Inc. 3909 W Congress Street, Suite 201 Lafayette, Louisiana 70506 Phone: (337) 234-5710 Email: adginc@adginc.org

