



COLTON JOINT UNIFIED SCHOOL DISTRICT

ADDENDUM NO. 2
25-010JB Lincoln Elementary Painting Project
Addendum No. 1
December 13, 2024

Addendum No. 2 is issued in response to questions received from prospective firms.

Question No. 1: Do we need to paint any building or doors letters and / or numbers? If yes - please, provide a list of building and doors and the applicable letter and numbers.

Response: This information can be attached in the attached revised Painting Specifications attached.

Question No. 2: Can you provide any paint specifications incl. paint finish schedule?

Response: Please see the attachments

- ASHL30-EN-PDS-1024
- EVSH10-EN-PDS-1024
- UGPR00-EN-PD-1024

Respectfully
JoAnn Baeza



APPLY A HIGHER STANDARD™

ARISTOSHIELD®

Interior/Exterior Eggshell Paint ASHL30



≤ 50 g/L VOC**

ARISTOSHIELD® Eggshell is an ultra-premium interior/exterior ultra-low VOC enamel formulated with advanced water-based urethane alkyd technology for an oil-like finish. It is ideal for use on high-end residential, commercial, and industrial projects where superior performance and durability are required on doors, trim, cabinets, as well as metal surfaces such as wrought iron, garage doors, hand rails, and metal doors.

PRODUCT INFORMATION

SOLVENT TYPE: Waterborne | **RESIN TYPE:** Waterborne urethane alkyd

FINISH (ASTM D 523): Eggshell: 10–15% on a 60° meter; 15–30% on a 85° meter

COLORS: Stock color: Black. All colors can be special ordered or store mixed.

TINT BASES: L Tintable White, M Medium, U Ultra Deep

VISCOSITY@77°F/25°C (ASTM D 562): 98–105 KU

MAXIMUM VOC CONTENT 50 g/L (as supplied) | **MAXIMUM RAVOC** (Reactivity-Adjusted VOC) 50 g/L

SOLIDS BY VOLUME (ASTM D 2697) 37.5% ± 2% | **SOLIDS BY WEIGHT** 54.1% ± 2%

WEIGHT PER GALLON (ASTM D 1475): 11.28 lbs.

COMPOSITION BY WEIGHT

Pigment–33.4%	Vehicle–66.6%
*Prime pigments 22.3	Resin solids 18.6
Reinforcing pigments 11.1	Water & additives 48.0

**Prime pigments include titanium dioxide (TiO₂), plus all other pigments directly adding to the hiding power of this paint.*

RECOMMENDED FILM THICKNESS PER COAT

Wet: 4.0 mils | Dry: 1.5 mils

PERFORMANCE SPECIFICATION

Permeability: 2.13 | **ASTM D 1653-13 Method A**
 Scrubbability Results: >4000 cycles | **ASTM D2486; no shim**
 Pencil Hardness Results: HB | **ASTM D3363; 7 day cure**
 Accelerated Weathering Results: Pass | **ASTM D4587-23; 500 hrs**
 Mandrel Bend Results: Pass | **ASTM D522-B; 1/2" mandrel**
 Washability Results: Pass | **ASTM D4828; avg of 5 stains**
 Block Resistance Results: Excellent | **ASTM D4946; Room & High Temp Conditioned**

PRACTICAL COVERAGE PER COAT AT RECOMMENDED DRY FILM THICKNESS

Approximately 350–425 sq. ft. per gallon, depending on surface conditions and application techniques.

THINNING RECOMMENDATION: This coating is intended to be applied without thinning or diluting under normal environmental and application conditions. If necessary to maintain good workability, add up to 1/4 pint (4 fl. oz.) of clean water per gallon of coating.

AVERAGE DRY TIME@77°F/25°C (ASTM D 1640)

To touch: 1-2 hours | Recoat: After 4-6 hours
 Dry times and recoat times are temperature, humidity and film thickness dependent.

APPLICATION EQUIPMENT: Brush, roller, airless spray

AIRLESS SPRAY	BRUSH	ROLLER
PRESSURE: 1800-2500 psi TIP: .013"-.015"	Nylon/Polyester	Smooth Surfaces: 1/4" nap Semi-Smooth Surfaces: 3/8" - 1/2" nap

PACKAGING: Quart, one-gallon, five-gallon containers

STORAGE: Store in a dry area. Protect from freezing. Protect from temperatures above 110°F for extended periods of time. Extreme temperatures may cause paint to become unusable. See *Paint Storage Best Practices* Technical Bulletin at dunnedwards.com for more information.

CLEANUP: Warm, soapy water

DISPOSAL: For information on local options to dispose of unwanted leftover paint, call Dunn-Edwards Customer Service at 1-888-DEPAINT or visit www.dunnedwards.com. **Do not mix with other products.**

CONFORMS TO:

- | | |
|---|---|
| <ul style="list-style-type: none"> • ARB 2007/2022 SCM & CALGreen 2022 • CA Section 01350 • LEED v4/4.1 • SCAQMD Rule 1113 • CA Extended Producer Responsibility | <ul style="list-style-type: none"> • MIR, HPD • MPI Approved Product #167 • CRGI Green Wise Certified • FDA Guidelines for Coatings |
|---|---|

SAFETY DATA SHEET: Available at www.dunnedwards.com

SURFACE PREPARATION: All surfaces must be cured, clean, dry, and free from dirt, dust, rust, stains, grease, oil, mildew, wax, efflorescence, bond-breakers, and other contaminants. Remove all loose, peeling, or chalky paint by sanding, scraping, or other appropriate methods. Repair all cracks, holes, and other surface imperfections with a suitable patching material. Repaired surfaces should then be sanded smooth and dusted clean. Glossy surfaces should be dulled to provide a roughened surface for good adhesion.

SPECIAL INSTRUCTIONS

- **CAUTION!** Scraping or sanding surfaces of older buildings (especially pre-1978) may release dust containing lead or asbestos. **EXPOSURE TO LEAD OR ASBESTOS CAN BE VERY HAZARDOUS TO YOUR HEALTH.** Wear a NIOSH-approved N100 particulate filter mask to avoid breathing dust. Use a HEPA vacuum for cleanup, and finish by water-washing all surfaces. For more information, see Dunn-Edwards brochure on "Surface Preparation Safety" or call U.S. EPA's lead hotline at 1-800-424-LEAD, or visit www.epa.gov/lead or /asbestos, or contact your state or local Health Agency.
- This product can neither cause nor prevent or cure the growth of mold, mildew, or other forms of fungus. Excessive moisture and inadequate ventilation are the main conditions that promote their growth. Correct any such conditions before painting.
- Do not apply when the air or surface temperature is below 50°F.
- While we recommend applying our exterior latex paints within industry standard temperature ranges, they can be applied at temperatures up to 120°F. Refer to www.dunnedwards.com/technical-bulletins/ for more information.



APPLY A HIGHER STANDARD™

ARISTOSHIELD®

Interior/Exterior Eggshell Paint ASHL30



≤ 50 g/L VOC**

PRODUCT INFORMATION

PRIMERS

DRYWALL

Textured: } VINYLASTIC® Premium (VNPR00),
 Untextured: } VINYLASTIC® Premium (VNPR00),
 Skim-coated: } VINYLASTIC® Plus (VNPL00)

MASONRY

Plaster: } EFF-STOP® Premium (ESPR00),
 Tilt-up concrete: } EFF-STOP® Select (ESSL00) or
 Poured-in-place: } FLEX-PRIME® Select (FPSL00)
 Brick: }
 Concrete block: } Smooth BLOCFIL™ Premium (SBPR00) or
 Smooth trowel: } Smooth BLOCFIL™ Select (SBSL00)
 } SUPER-LOC® Premium (SLPR00)

WOOD

Doors, trim } DECOPRIME® (DCPR00),
 } ULTRA-GRIP® Premium (UGPR00),
 } BLOCK-IT® Premium (BIPR00) or
 } EZ-PRIME® Premium (EZPR00) – EXTERIOR ONLY

SYNTHETIC WOOD

Masonite: } DECOPRIME® (DCPR00),
 Hardboard: } ULTRA-GRIP® Premium (UGPR00),
 } BLOCK-IT® Premium (BIPR00)

METAL¹

Ferrous: } BLOC-RUST® Premium (BRPR00) or
 } ENDURAPRIME® Metal Primer (ENPR00)
 Non-ferrous: } ULTRASHIELD® Galvanized Metal Primer (ULGM00)
 } BLOC-RUST® Premium (BRPR00) or
 } SUPER-LOC® Premium (SLPR00)
 Galvanized steel: } ULTRASHIELD® Galvanized Metal Primer (ULGM00) or
 } *ULTRA-GRIP® Premium (UGPR00)

^{*}for incidental use on galvanized

¹DTM (Direct to Metal): ARISTOSHIELD can be used as a direct to metal coating on properly prepared steel surfaces by applying two (2) coats of ARISTOSHIELD. Note: for best corrosion protection, one (1) coat of BLOC-RUST Premium primer and two (2) coats of ARISTOSHIELD topcoat are recommended. ARISTOSHIELD should not be applied directly to galvanized steel. For best results, apply one coat of ULTRASHIELD Galvanized Metal Primer (ULGM00).

****This product has been tested and certified by Coatings Research Group Inc., an international paint industry-organized ISO-accredited testing laboratory, to meet performance and environmental standards as shown on www.greenwisepaint.com. Dunn-Edwards is a member of CRGI.**


HEALTH & SAFETY CAUTIONS! INHALATION OF SPRAY MIST OR SANDING DUST MAY BE HARMFUL. Use only with adequate ventilation. Avoid breathing vapors, spray mist and sanding dust. Wear NIOSH-approved N100 particulate filter mask when spraying or sanding. Avoid contact with skin and eyes. Do not ingest. Close container after each use. **FIRST AID:** If swallowed, immediately give 1 or 2 glasses of water to drink – for emergency information, call 1-800-222-1222. If having difficulty breathing, move to fresh air. For eye contact, immediately flush with water for 15 minutes. For skin contact, wash thoroughly with soap and water.

• KEEP OUT OF REACH OF CHILDREN •

Ingredient (CAS #): Water (7732-18-5); Titanium Dioxide (13463-67-7); Copolymer Resin (Proprietary); Aluminosilicates (68476-25-5/37244-96-5); Zinc Phosphate (7779-90-0); Quartz (14808-60-7).

⚠ WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

2024 Summer Exterior Paint Remodel at Abraham Lincoln Elementary School

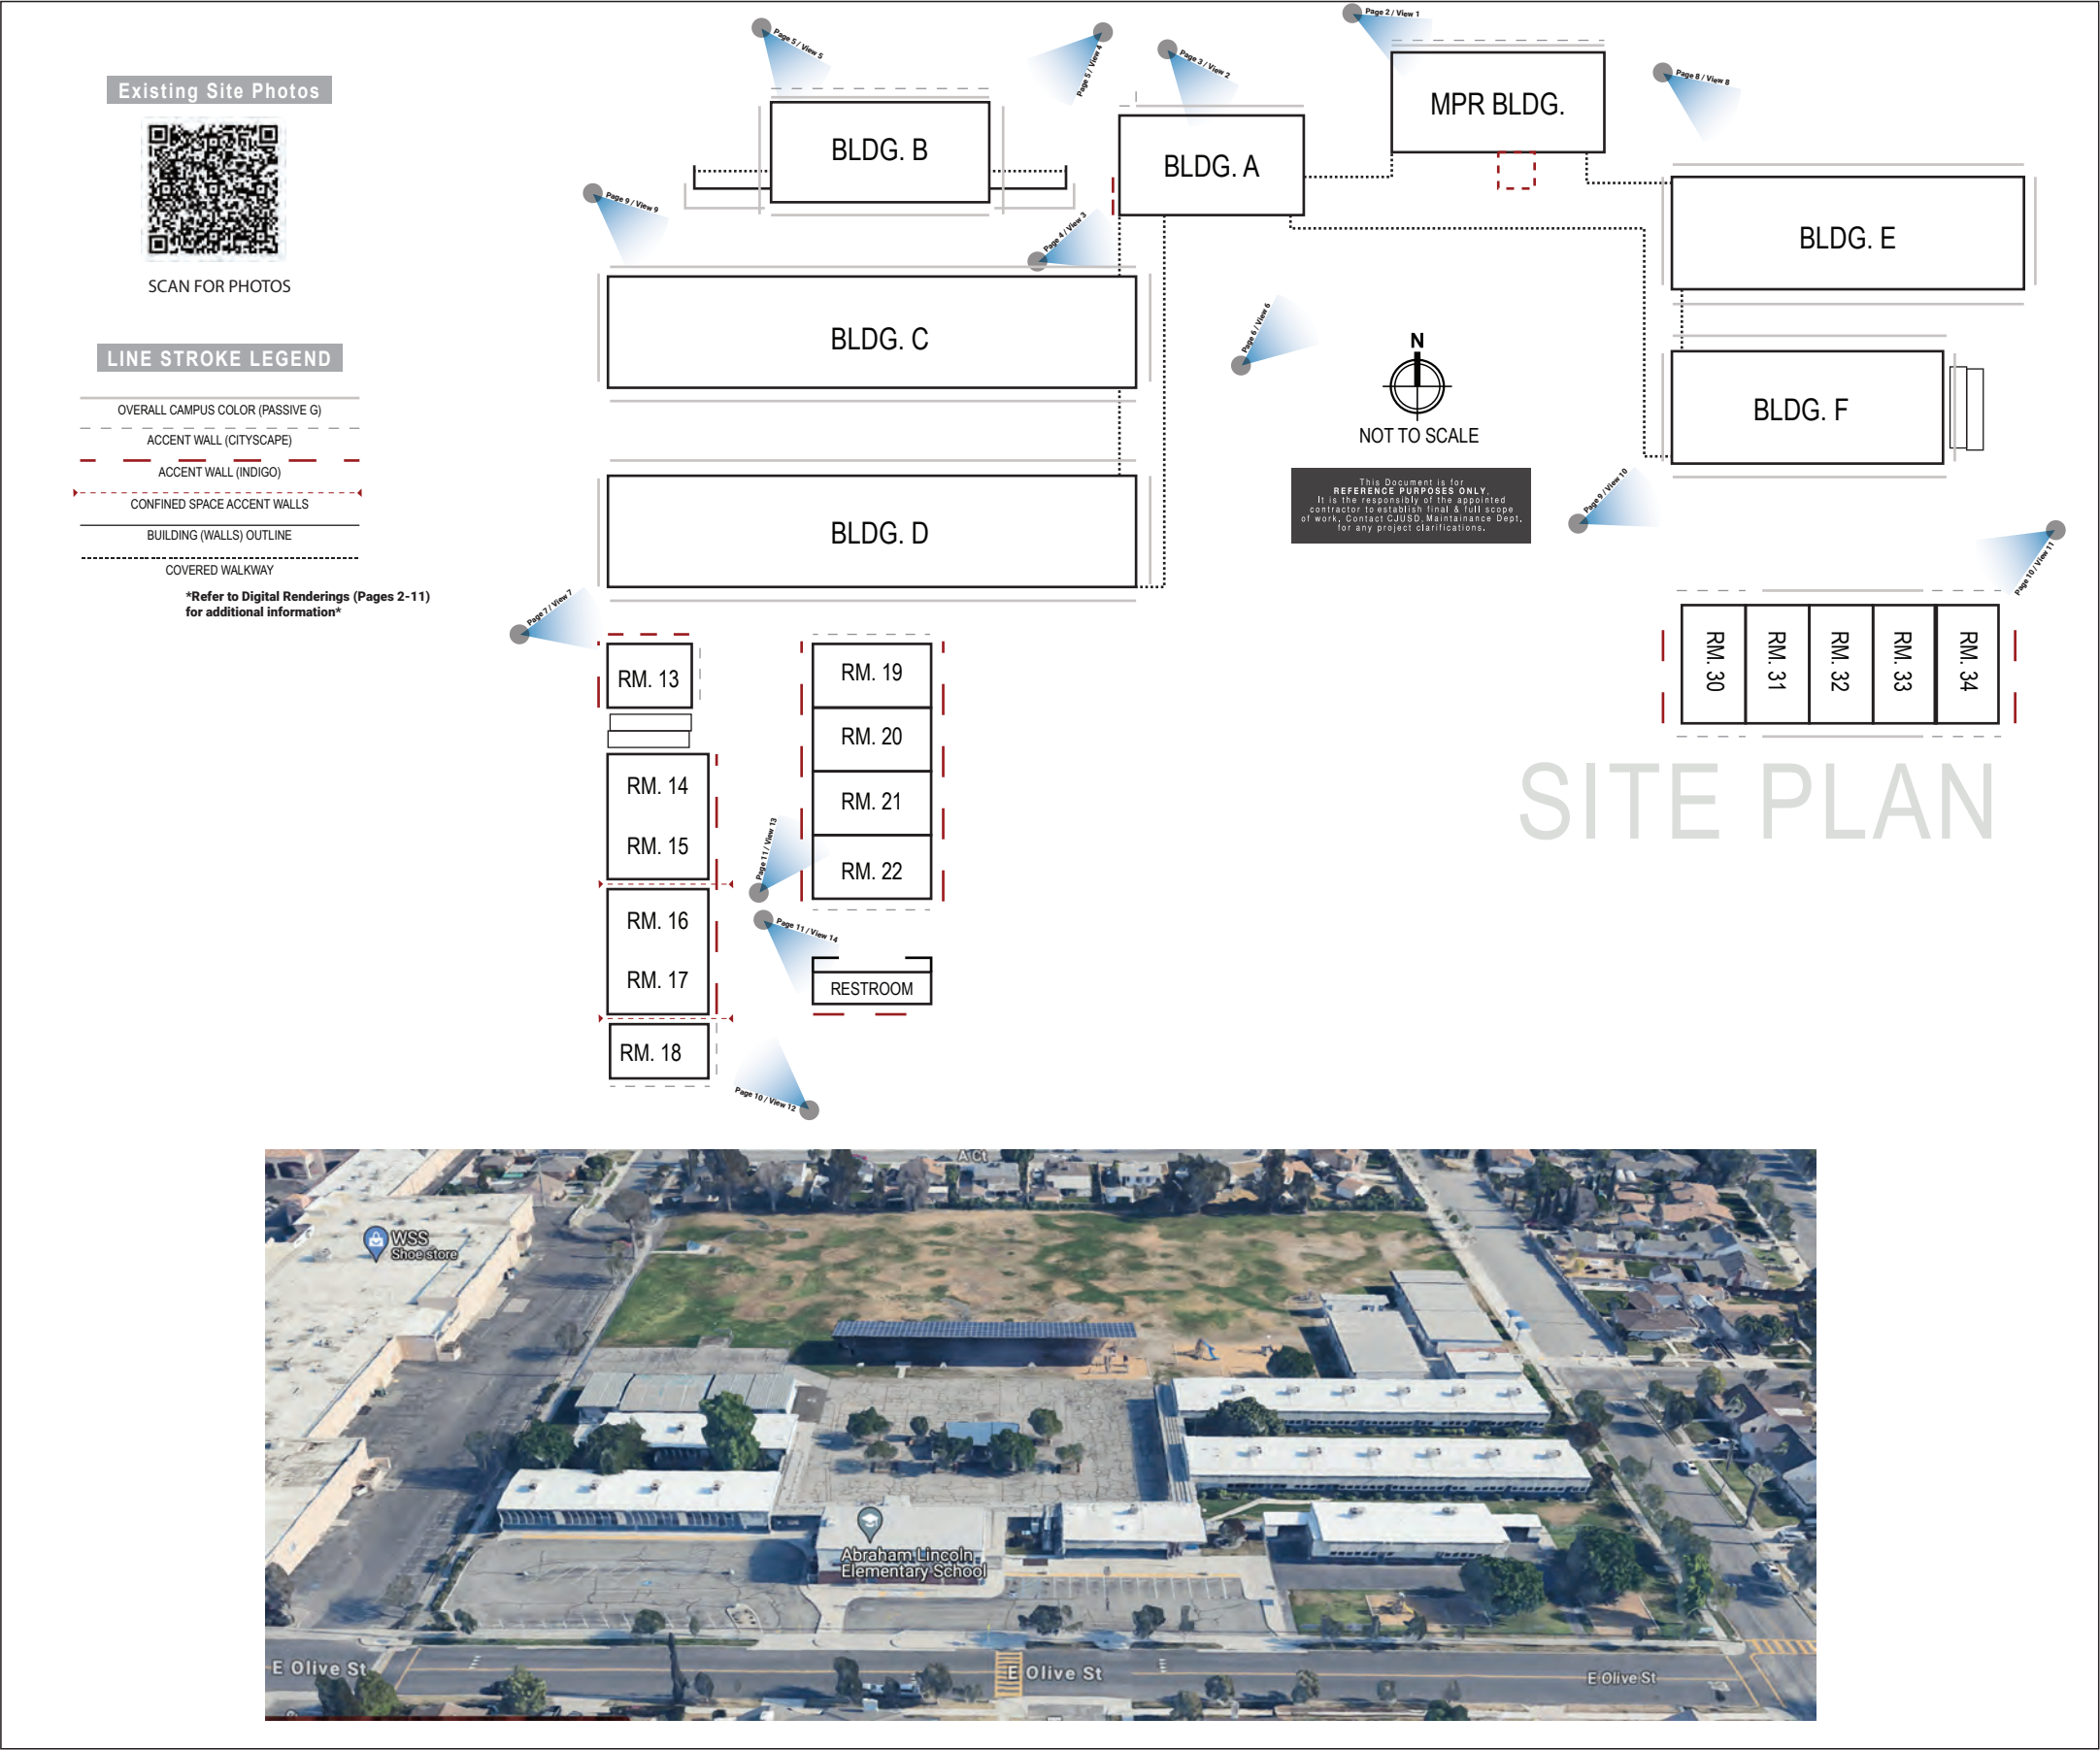

Projected Timeline

T.B.D.


School Logo



Exterior Paint Selections

Color Name	Cityscape	Mid-Gray	Passive G	Indigo
Color Swatch				
Hex Code	sw7067	TBD	sw7064	sw6531
Painted Features	as-noted	as-noted	as-noted	as-noted

Vinicity Map



Scope of Work

Typical exterior paint remodel (complete) to include minor cosmetic repairs. (as-noted) Color change to include but not limited to painting of administration buildings, classroom buildings, MPR buildings, covered walkways & portable classrooms'.
i.e. building coping, main walls, accent walls, columns, doors & window frames.
Refer to pages 1-11 for more information.

General Notes

- All exposed aluminum window framing to remain clean & unpainted. (N.I.C.)
- All unfinished surfaces / concrete to remain clean & unpainted, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.
- All door hardware, windows, flooring, landscape & roofing to remain clean & clear of any overspray.
- All galvanized railing, chain link fencing & gates to remain clean & unpainted. Unless otherwise noted.
- All areas in which work is done shall be left clean and in good repair. Any damage done to the existing and/or new work by the contractor or any of his subcontractors or employees shall be repaired at no cost to the satisfaction of the district.
- Apply all primers and paints according to manufacturer's written instructions & recommendations.

Comments

Contact



Colton Joint Unified School District
Maintenance & Operations Department
(909)580-5008 / 7:30am - 4:00pm

Title	Site Plan w/ General Notes		
Location	Abraham Lincoln Elementary School		
Drawn	1/10/2024	Reviewed by	
Revised	12/11/2024	Approved by	

All rights reserved. This document is the product of intensive creative efforts and contains confidential trade secret information belonging to Labeld Ink Incorporated. No disclosure, distribution or reproduction of this material may be made without prior written authorization from Labeld Ink Incorporated. Unauthorized use, disclosure, dissemination or duplication of any of the information contained herein may result in liability under applicable laws.

Labeld Ink
design company

Contact Information

Maintenance & Operations Department
(909)580-5008 / 7:30am - 4:00pm (M-F)
1313 Valley Boulevard,
Colton, CA 92324

Project Address

Abraham Lincoln Elementary School
444 E Olive Street
Colton, CA 92324

No. 1 of 11

Review Set: Dec. 11, 2024

Proposed



VIEW 1

Existing




Existing Murals & Lettering to be remain

Location

Abraham Lincoln Elementary School
444 E Olive Street
Colton, CA 92324

Site Plan Key

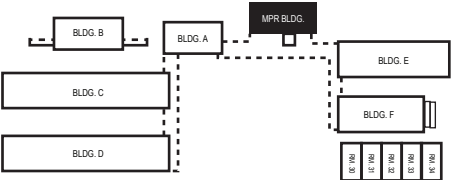

Exterior Paint Selections

Cityscape
sw7067

Mid-Gray
TBD

Passive G
sw7064

Indigo
sw6531

Brick Siding & Accents

Accents Ribbon

Exterior Walls & Ceilings

Accent Walls, Exposed Conduit, Coping, Columns, Window Trim & Doors

Refer to Line Stroke Legend (Page 1) for additional information

SITE PLAN

Project Notes

- All exterior doors to be primed & painted (_____, _____), unless otherwise noted.
- All building exposed metal coping to be painted (_____, _____), unless otherwise noted.
- All painted door & window framing to be painted (_____, _____), unless otherwise noted.
- Building main walls to be painted (_____, _____), unless otherwise noted.
- Building accent walls, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
- Building cornice moldings & accents, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
- Building accent ribbon, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.

General Notes

- All exposed aluminum framing to remain clean & unpainted. (N.I.C.)
- All unfinished surfaces / concrete to remain clean & unpainted, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.
- All door hardware, windows, flooring, landscape & roofing to remain clean and clear of any overspray.
- All galvanized railing, chain link fencing & gates to remain clean & unpainted. Unless otherwise noted.
- All exposed light fixtures, cameras & fire alarm equipment to remain clean and clear of any overspray. (Exposed electrical conduit and intercom trim plates to be painted noted exterior color, coordinate w/ CJUSD.)
- Existing signage to be removed & replace, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.

Comments

Existing painted murals (N.I.C.), to remain clean and clear of all overspray

Contact



Colton Joint Unified School District
Maintenance & Operations Department
(909)580-5008 / 7:30am - 4:00pm

Title	Multi-Purpose Building		
Location	Abraham Lincoln Elementary School		
Drawn	1/10/2024	Reviewed by	
Revised	12/11/2024	Approved by	

All rights reserved. This document is the product of intensive creative efforts and contains confidential trade secret information belonging to Labeld Ink Incorporated. No disclosure, distribution or reproduction of this material may be made without prior written authorization from Labeld Ink Incorporated. Unauthorized use, disclosure, dissemination or duplication of any of the information contained herein may result in liability under applicable laws.

Labeld Ink
design company

Proposed



Existing



Bldg. A (South View)


Location

Abraham Lincoln Elementary School
444 E Olive Street
Colton, CA 92324

Exterior Paint Selections

Cityscape sw7067	Mid-Gray TBD	Passive G sw7064	Indigo sw6531
Brick Siding & Accents	Accents Ribbon	Exterior Walls & Ceilings	Accent Walls, Exposed Conduit, Coping, Columns, Window Trim & Doors

Site Plan Key

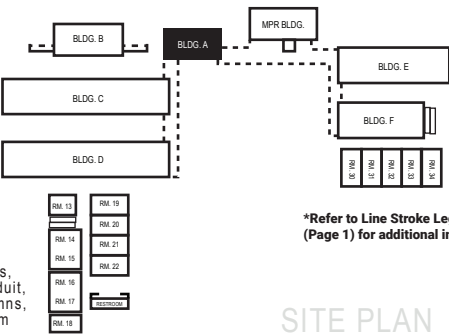

SITE PLAN

Project Notes

- 1 All exterior doors to be primed & painted (_____, _____), unless otherwise noted.
- 2 All building exposed metal coping to be painted (_____, _____), unless otherwise noted.
- 3 All painted door & window framing to be painted (_____, _____), unless otherwise noted.
- 4 Building main walls to be painted (_____, _____), unless otherwise noted.
- 5 Building accent walls, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
- 6 Building cornice moldings & accents, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
- 7 Building accent ribbon, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.

General Notes

- All exposed aluminum framing to remain clean & unpainted. (N.I.C.)
- All unfinished surfaces / concrete to remain clean & unpainted, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.
- All door hardware, windows, flooring, landscape & roofing to remain clean and clear of any overspray.
- All galvanized railing, chain link fencing & gates to remain clean & unpainted. Unless otherwise noted.
- All exposed light fixtures, cameras & fire alarm equipment to remain clean and clear of any overspray. (Exposed electrical conduit and intercom trim plates to be painted noted exterior color, coordinate w/ CJUSD.)
- Existing signage to be removed & replace, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.

Comments

Contact



Colton Joint Unified School District
Maintenance & Operations Department
(909)580-5008 / 7:30am - 4:00pm

Title	Building 'A' South View		
Location	Abraham Lincoln Elementary School		
Drawn	1/10/2024	Reviewed by	
Revised	12/11/2024	Approved by	
All rights reserved. This document is the product of intensive creative efforts and contains confidential trade secret information belonging to Labeld Ink Incorporated. No disclosure, distribution or reproduction of this material may be made without prior written authorization from Labeld Ink Incorporated. Unauthorized use, disclosure, dissemination or duplication of any of the information contained herein may result in liability under applicable laws.			

Proposed




VIEW 3

Existing



Existing Murals & Lettering to be painted (Reche Burgundy).

Bldg. A (North View)

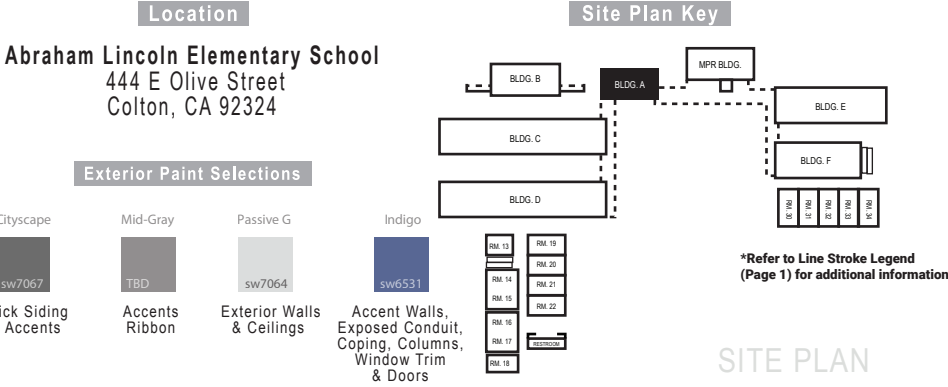

Project Notes

- 1 All exterior doors to be primed & painted (_____, _____), unless otherwise noted.
- 2 All building exposed metal coping to be painted (_____, _____), unless otherwise noted.
- 3 All painted door & window framing to be painted (_____, _____), unless otherwise noted.
- 4 Building main walls to be painted (_____, _____), unless otherwise noted.
- 5 Building accent walls, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
- 6 Building cornice moldings & accents, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
- 7 Building accent ribbon, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.

General Notes

- All exposed aluminum framing to remain clean & unpainted. (N.I.C.)
- All unfinished surfaces / concrete to remain clean & unpainted, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.
- All door hardware, windows, flooring, landscape & roofing to remain clean and clear of any overspray.
- All galvanized railing, chain link fencing & gates to remain clean & unpainted. Unless otherwise noted.
- All exposed light fixtures, cameras & fire alarm equipment to remain clean and clear of any overspray. (Exposed electrical conduit and intercom trim plates to be painted noted exterior color, coordinate w/ CJUSD.)
- Existing signage to be removed & replace, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.

Comments

Existing painted murals (N.I.C.), to remain clean and clear of all overspray

Contact



Colton Joint Unified School District
Maintenance & Operations Department
(909)580-5008 / 7:30am - 4:00pm

Title	Building 'A' North View		
Location	Abraham Lincoln Elementary School		
Drawn	1/10/2024	Reviewed by	
Revised	12/11/2024	Approved by	
All rights reserved. This document is the product of intensive creative efforts and contains confidential trade secret information belonging to Labeld Ink Incorporated. No disclosure, distribution or reproduction of this material may be made without prior written authorization from Labeld Ink Incorporated. Unauthorized use, disclosure, dissemination or duplication of any of the information contained herein may result in liability under applicable laws.			

Proposed



Proposed



VIEW 5



Existing



Existing

COLTON JOINT UNIFIED SCHOOL DISTRICT

2024 Summer Exterior Paint Remodel at Abraham Lincoln Elementary

Location
Abraham Lincoln Elementary School
444 E Olive Street
Colton, CA 92324

Exterior Paint Selections



- Project Notes**
- 1 All exterior doors to be primed & painted (_____, _____), unless otherwise noted.
 - 2 All building exposed metal coping to be painted (_____, _____), unless otherwise noted.
 - 3 All painted door & window framing to be painted (_____, _____), unless otherwise noted.
 - 4 Building main walls to be painted (_____, _____), unless otherwise noted.
 - 5 Building accent walls, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
 - 6 Building cornice moldings & accents, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
 - 7 Building accent ribbon, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.

**Please forward approved paint manufacturer information i.e. color codes & titles)

General Notes

- All exposed aluminum framing to remain clean & unpainted. (N.I.C.)
- All unfinished surfaces / concrete to remain clean & unpainted, unless otherwise noted. Coordinate with CJUSD, Maintenance Dept.
- All door hardware, windows, flooring, landscape & roofing to remain clean and clear of any overspray.
- All galvanized railing, chain link fencing & gates to remain clean and unpainted, unless otherwise noted.
- All exposed light fixtures, cameras & fire alarm equipment to remain clean and clear of any overspray. (Exposed electrical conduit and intercom trim plates to be painted noted color, coordinate w/ CJUSD.)
- Existing signage to be removed & replace, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.

Comments

**Addition of building identification signage/lettering recommended.

Contact



Colton Joint Unified School District
Maintenance & Operations Department
(909)580-5008 / 7:30am - 4:00pm

No. 5 of 11			
Title	Building 'B' Kindergarden CR		
Location	Abraham Lincoln Elementary School		
Drawn	1/10/2024	Reviewed by	
Revised	12/11/2024	Approved by	
All rights reserved. This document is the product of intensive creative efforts and contains confidential trade secret information belonging to Labeld Ink Incorporated. No disclosure, distribution or reproduction of this material may be made without prior written authorization from Labeld Ink Incorporated. Unauthorized use, disclosure, dissemination or duplication of any of the information contained herein may result in liability under applicable laws.			

Labeld Ink
design company

Proposed



Existing




Bldg. E (South View)

Location

Abraham Lincoln Elementary School
444 E Olive Street
Colton, CA 92324

Site Plan Key

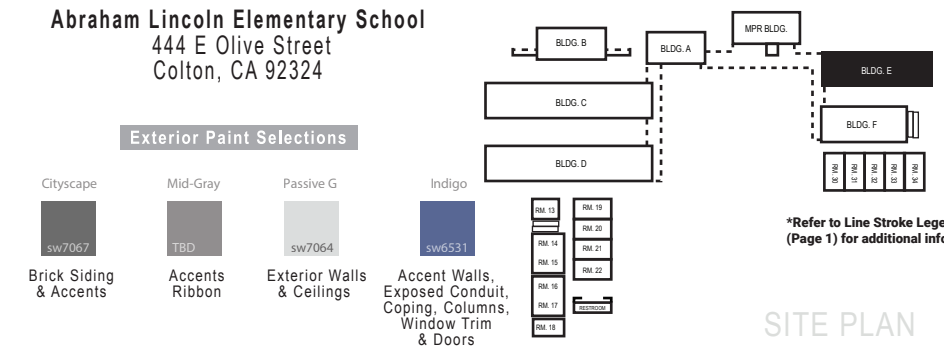

Project Notes

- ① All exterior doors to be primed & painted (_____, _____), unless otherwise noted.
- ② All building exposed metal coping to be painted (_____, _____), unless otherwise noted.
- ③ All painted door & window framing to be painted (_____, _____), unless otherwise noted.
- ④ Building main walls to be painted (_____, _____), unless otherwise noted.
- ⑤ Building accent walls, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
- ⑥ Building cornice moldings & accents, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
- ⑦ Building accent ribbon, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.

General Notes

- All exposed aluminum framing to remain clean & unpainted. (N.I.C.)
- All unfinished surfaces / concrete to remain clean & unpainted, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.
- All door hardware, windows, flooring, landscape & roofing to remain clean and clear of any overspray.
- All galvanized railing, chain link fencing & gates to remain clean & unpainted. Unless otherwise noted.
- All exposed light fixtures, cameras & fire alarm equipment to remain clean and clear of any overspray. (Exposed electrical conduit and intercom trim plates to be painted noted exterior color, coordinate w/ CJUSD.)
- Existing signage to be removed & replace, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.

Comments

Contact



Colton Joint Unified School District
Maintenance & Operations Department
(909)580-5008 / 7:30am - 4:00pm

Title	Building 'E' South View		
Location	Abraham Lincoln Elementary School		
Drawn	1/10/2024	Reviewed by	
Revised	12/11/2024	Approved by	
All rights reserved. This document is the product of intensive creative efforts and contains confidential trade secret information belonging to Labelink Incorporated. No disclosure, distribution or reproduction of this material may be made without prior written authorization from Labelink Incorporated. Unauthorized use, disclosure, dissemination or duplication of any of the information contained herein may result in liability under applicable laws.			

Proposed



Existing




This Document is for
REFERENCE PURPOSES ONLY.
It is the responsibility of the appointed
contractor to establish final & full scope
of work. Contact CJUSD, Maintenance Dept.
for any project clarifications.

COLTON JOINT UNIFIED SCHOOL DISTRICT
2024 Summer Exterior Paint Remodel at Abraham Lincoln Elementary

Location

Abraham Lincoln Elementary School
444 E Olive Street
Colton, CA 92324

Site Plan Key

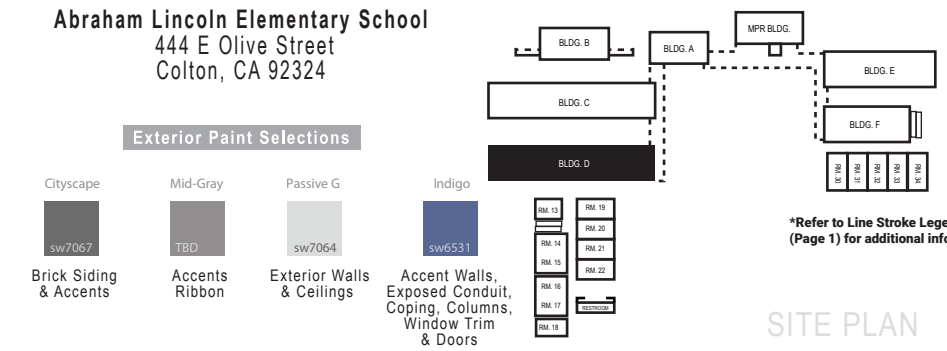

Project Notes

- ① All exterior doors to be primed & painted (_____, _____), unless otherwise noted.
- ② All building exposed metal coping to be painted (_____, _____), unless otherwise noted.
- ③ All painted door & window framing to be painted (_____, _____), unless otherwise noted.
- ④ Building main walls to be painted (_____, _____), unless otherwise noted.
- ⑤ Building accent walls, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
- ⑥ Building cornice moldings & accents, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
- ⑦ Building accent ribbon, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.

General Notes

- All exposed aluminum framing to remain clean & unpainted. (N.I.C.)
- All unfinished surfaces / concrete to remain clean & unpainted, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.
- All door hardware, windows, flooring, landscape & roofing to remain clean and clear of any overspray.
- All galvanized railing, chain link fencing & gates to remain clean & unpainted. Unless otherwise noted.
- All exposed light fixtures, cameras & fire alarm equipment to remain clean and clear of any overspray. (Exposed electrical conduit and intercom trim plates to be painted noted exterior color, coordinate w/ CJUSD.)
- Existing signage to be removed & replace, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.

Comments

No. 7 of 11

Title	Typical Classroom Building (D)		
Location	Abraham Lincoln Elementary School		
Drawn	1/10/2024	Reviewed by	
Revised	12/11/2024	Approved by	

All rights reserved. This document is the product of intensive creative efforts and contains confidential trade secret information belonging to Labelink Incorporated. No disclosure, distribution or reproduction of this material may be made without prior written authorization from Labelink Incorporated. Unauthorized use, disclosure, dissemination or duplication of any of the information contained herein may result in liability under applicable laws. □



All rights reserved. This document is the product of intensive creative efforts and contains confidential trade secret information belonging to Label Ink Incorporated. No disclosure, distribution or reproduction of this material may be made without prior written authorization from Label Ink Incorporated. Unauthorized use, disclosure, dissemination or duplication of any of the information contained herein may result in liability under applicable laws. ☐

Review Set: Dec. 11, 2024

Colton Joint Unified School District - Exterior Paint Project Abraham Lincoln ES, Summer 2024

TYPICAL CR BLDG.


Proposed



Existing



BLDG. A & MPR

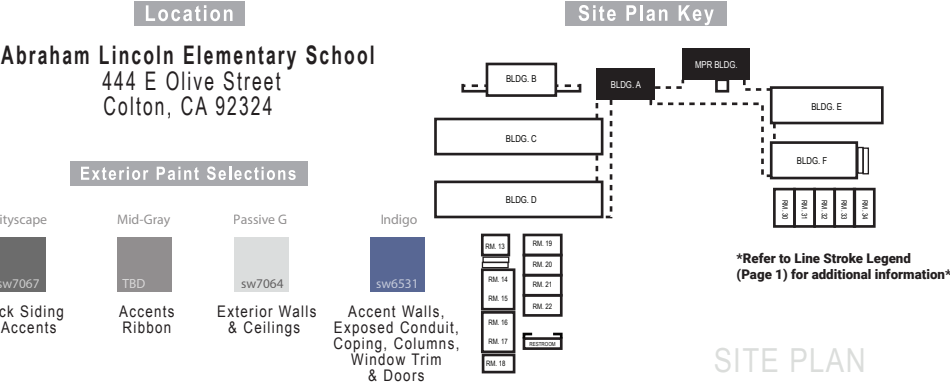

Project Notes

- 1 All exterior doors to be primed & painted (_____, _____), unless otherwise noted.
- 2 All building exposed metal coping to be painted (_____, _____), unless otherwise noted.
- 3 All painted door & window framing to be painted (_____, _____), unless otherwise noted.
- 4 Building main walls to be painted (_____, _____), unless otherwise noted.
- 5 Building accent walls, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
- 6 Building cornice moldings & accents, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
- 7 Building accent ribbon, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.

General Notes

- All exposed aluminum framing to remain clean & unpainted. (N.I.C.)
- All unfinished surfaces / concrete to remain clean & unpainted, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.
- All door hardware, windows, flooring, landscape & roofing to remain clean and clear of any overspray.
- All galvanized railing, chain link fencing & gates to remain clean & unpainted. Unless otherwise noted.
- All exposed light fixtures, cameras & fire alarm equipment to remain clean and clear of any overspray. (Exposed electrical conduit and intercom trim plates to be painted noted exterior color, coordinate w/ CJUSD.)
- Existing signage to be removed & replace, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.

Comments

Existing painted murals (N.I.C.), to remain clean and clear of all overspray

Contact



Colton Joint Unified School District
Maintenance & Operations Department
(909)580-5008 / 7:30am - 4:00pm

Title	Bldg. A & MPR (North View)		
Location	Abraham Lincoln Elementary School		
Drawn	1/10/2024	Reviewed by	
Revised	12/11/2024	Approved by	
All rights reserved. This document is the product of intensive creative efforts and contains confidential trade secret information belonging to Labeld Ink Incorporated. No disclosure, distribution or reproduction of this material may be made without prior written authorization from Labeld Ink Incorporated. Unauthorized use, disclosure, dissemination or duplication of any of the information contained herein may result in liability under applicable laws.			

No. 6 of 11

Labeld Ink
design company

Review Set: Dec. 11, 2024

Proposed



Proposed



Existing



Existing

COLTON JOINT UNIFIED SCHOOL DISTRICT

2024 Summer Exterior Paint Remodel at Abraham Lincoln Elementary

Location
Abraham Lincoln Elementary School
444 E Olive Street
Colton, CA 92324

Exterior Paint Selections

Cityscape	Mid-Gray	Passive G	Indigo
Brick Siding & Accents	TBD	sw7064	sw6531
Accents Ribbon		Exterior Walls & Ceilings	Accent Walls, Exposed Conduit, Coping, Columns, Window Trim & Doors

- Project Notes**
- 1 All exterior doors to be primed & painted (_____, _____), unless otherwise noted.
 - 2 All building exposed metal coping to be painted (_____, _____), unless otherwise noted.
 - 3 All painted door & window framing to be painted (_____, _____), unless otherwise noted.
 - 4 Building main walls to be painted (_____, _____), unless otherwise noted.
 - 5 Building accent walls, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
 - 6 Building cornice moldings & accents, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
 - 7 Building accent ribbon, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.

**Please forward approved paint manufacturer information i.e. color codes & titles)

- General Notes**
- All exposed aluminum framing to remain clean & unpainted. (N.I.C.)
 - All unfinished surfaces / concrete to remain clean & unpainted, unless otherwise noted. Coordinate with CJUSD, Maintenance Dept.
 - All door hardware, windows, flooring, landscape & roofing to remain clean and clear of any overspray.
 - All galvanized railing, chain link fencing & gates to remain clean and unpainted, unless otherwise noted.
 - All exposed light fixtures, cameras & fire alarm equipment to remain clean and clear of any overspray. (Exposed electrical conduit and intercom trim plates to be painted noted color, coordinate w/ CJUSD.)
 - Existing signage to be removed & replace, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.

Comments

**Addition of building identification signage/lettering recommended.

Contact



Colton Joint Unified School District
Maintenance & Operations Department
(909)580-5008 / 7:30am - 4:00pm

Title	Building 'C & F' Typical CR		
Location	Abraham Lincoln Elementary School		
Drawn	1/10/2024	Reviewed by	
Revised	12/11/2024	Approved by	
All rights reserved. This document is the product of intensive creative efforts and contains confidential trade secret information belonging to Labeld Ink Incorporated. No disclosure, distribution or reproduction of this material may be made without prior written authorization from Labeld Ink Incorporated. Unauthorized use, disclosure, dissemination or duplication of any of the information contained herein may result in liability under applicable laws.			

No. 9 of 11

Labeld Ink
design company

Proposed



VIEW 11

Proposed



VIEW 12



Existing



Existing

COLTON JOINT UNIFIED SCHOOL DISTRICT

2024 Summer Exterior Paint Remodel at Abraham Lincoln Elementary

Location
Abraham Lincoln Elementary School
444 E Olive Street
Colton, CA 92324

Exterior Paint Selections

Cityscape	Mid-Gray	Passive G	Indigo
Brick Siding & Accents	TBD	sw7064	sw6531
Accents Ribbon		Exterior Walls & Ceilings	Accent Walls, Exposed Conduit, Coping, Columns, Window Trim & Doors

- Project Notes**
- 1 All exterior doors to be primed & painted (_____, _____), unless otherwise noted.
 - 2 All building exposed metal coping to be painted (_____, _____), unless otherwise noted.
 - 3 All painted door & window framing to be painted (_____, _____), unless otherwise noted.
 - 4 Building main walls to be painted (_____, _____), unless otherwise noted.
 - 5 Building accent walls, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
 - 6 Building cornice moldings & accents, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
 - 7 Building accent ribbon, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.

**Please forward approved paint manufacturer information i.e. color codes & titles)

General Notes

- All exposed aluminum framing to remain clean & unpainted. (N.I.C.)
- All unfinished surfaces / concrete to remain clean & unpainted, unless otherwise noted. Coordinate with CJUSD, Maintenance Dept.
- All door hardware, windows, flooring, landscape & roofing to remain clean and clear of any overspray.
- All galvanized railing, chain link fencing & gates to remain clean and unpainted, unless otherwise noted.
- All exposed light fixtures, cameras & fire alarm equipment to remain clean and clear of any overspray. (Exposed electrical conduit and intercom trim plates to be painted noted color, coordinate w/ CJUSD.)
- Existing signage to be removed & replace, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.

Comments

**Addition of building identification signage/lettering recommended.

Contact



Colton Joint Unified School District
Maintenance & Operations Department
(909)580-5008 / 7:30am - 4:00pm

Title	Relo. Classroom (30-34)		
Location	Abraham Lincoln Elementary School		
Drawn	1/10/2024	Reviewed by	
Revised	12/11/2024	Approved by	

All rights reserved. This document is the product of intensive creative efforts and contains confidential trade secret information belonging to Labeld Ink Incorporated. No disclosure, distribution or reproduction of this material may be made without prior written authorization from Labeld Ink Incorporated. Unauthorized use, disclosure, dissemination or duplication of any of the information contained herein may result in liability under applicable laws.

No. 10 of 11

Labeld Ink
design company

Proposed



Proposed



Existing



Existing

COLTON JOINT UNIFIED SCHOOL DISTRICT
2024 Summer Exterior Paint Remodel at Abraham Lincoln Elementary

Location
Abraham Lincoln Elementary School
444 E Olive Street
Colton, CA 92324

Exterior Paint Selections

Cityscape	Mid-Gray	Passive G	Indigo
Brick Siding & Accents	TBD	sw7064	sw6531
Accents Ribbon		Exterior Walls & Ceilings	Accent Walls, Exposed Conduit, Coping, Columns, Window Trim & Doors

- Project Notes**
- 1 All exterior doors to be primed & painted (_____, _____), unless otherwise noted.
 - 2 All building exposed metal coping to be painted (_____, _____), unless otherwise noted.
 - 3 All painted door & window framing to be painted (_____, _____), unless otherwise noted.
 - 4 Building main walls to be painted (_____, _____), unless otherwise noted.
 - 5 Building accent walls, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
 - 6 Building cornice moldings & accents, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.
 - 7 Building accent ribbon, as noted (*rendered*) to be painted (_____, _____), unless otherwise noted.

**Please forward approved paint manufacturer information i.e. color codes & titles)

- General Notes**
- All exposed aluminum framing to remain clean & unpainted. (N.I.C.)
 - All unfinished surfaces / concrete to remain clean & unpainted, unless otherwise noted. Coordinate with CJUSD, Maintenance Dept.
 - All door hardware, windows, flooring, landscape & roofing to remain clean and clear of any overspray.
 - All galvanized railing, chain link fencing & gates to remain clean and unpainted, unless otherwise noted.
 - All exposed light fixtures, cameras & fire alarm equipment to remain clean and clear of any overspray. (Exposed electrical conduit and intercom trim plates to be painted noted color, coordinate w/ CJUSD.)
 - Existing signage to be removed & replace, unless otherwise noted. Coordinate with CJUSD, Maintenance Department.

Comments

**Addition of building identification signage/lettering recommended.

Contact



Colton Joint Unified School District
Maintenance & Operations Department
(909)580-5008 / 7:30am - 4:00pm

Title	Relo. Classroom (13-22 & RR)		
Location	Abraham Lincoln Elementary School		
Drawn	1/10/2024	Reviewed by	
Revised	12/11/2024	Approved by	
All rights reserved. This document is the product of intensive creative efforts and contains confidential trade secret information belonging to Labeld Ink Incorporated. No disclosure, distribution or reproduction of this material may be made without prior written authorization from Labeld Ink Incorporated. Unauthorized use, disclosure, dissemination or duplication of any of the information contained herein may result in liability under applicable laws.			

No. 11 of 11

Labeld Ink
design company



APPLY A HIGHER STANDARD™

EVERSHIELD®

Exterior Flat Paint EVSH10



≤ 50 g/L VOC**

EVERSHIELD® Flat is an ultra-premium exterior, ultra-low VOC, 100% acrylic paint that provides maximum protection against UV color fade, dirt pick-up, mildew, efflorescence, water intrusion, and film failure (grain-cracking, peeling, blistering). **EVERSHIELD Flat** can be used on properly prepared and primed masonry, concrete, tilt-up, block, stucco, plaster, wood, and metal. Advanced technology and premium ingredients provide unparalleled performance, durability, coverage, and adhesion. Can be used down to surface and air temperature of 35°F.

PRODUCT INFORMATION

SOLVENT TYPE: Waterborne	RESIN TYPE: 100% acrylic
FINISH (ASTM D 523): Flat: 2–4% on a 60° meter; 4–8% on an 85° meter	
COLORS: Stock colors: Swiss Coffee. Other colors can be special ordered or store mixed.	
TINT BASES: L Tintable White, M Medium, U Ultra Deep	
VISCOSITY@77°F/25°C (ASTM D 562): 102-110 KU	
MAXIMUM VOC CONTENT 50 g/L (as supplied)	MAXIMUM RAVOC (Reactivity-Adjusted VOC) 25 g/L
SOLIDS BY VOLUME (ASTM D 2697) 39.5% ± 2%	SOLIDS BY WEIGHT 55.3% ± 2%
WEIGHT PER GALLON (ASTM D 1475): 11.60 lbs.	

COMPOSITION BY WEIGHT

Pigment–39.9%	Vehicle–60.1%
*Prime pigments 20.9	Resin solids 13.8
Reinforcing pigments 19.0	Water & additives 46.3

*Prime pigments include titanium dioxide (TiO₂), plus all other pigments directly adding to the hiding power of this paint.

RECOMMENDED FILM THICKNESS PER COAT

Wet: 3.8 mils Dry: 1.5 mils

PERFORMANCE SPECIFICATION

Permeability: 5.76 | **ASTM D 1653-13 Method A**
 Accelerated Weathering Results: Pass | **ASTM D4587-23; 500 hrs**
 Accelerated Efflorescence Results: None visible - Pass |
ASTM D7072-04; 48 Hours exposure
 Surfactant Leaching Results : None visible - Pass | **ASTM D7190**

PRACTICAL COVERAGE PER COAT AT RECOMMENDED DRY FILM THICKNESS

Approximately 400–475 sq. ft. per gallon, depending on surface conditions and application techniques.

THINNING RECOMMENDATION: This coating is intended to be applied without thinning or diluting under normal environmental and application conditions. If necessary to maintain good workability, add up to 1/4 pint (4 fl. oz.) of clean water per gallon of coating.

AVERAGE DRY TIME@77°F/25°C (ASTM D 1640)

To touch: 1–2 hours Recoat: 2–4 hours
 Dry times and recoat times are temperature, humidity and film thickness dependent.

APPLICATION EQUIPMENT: Brush, roller, airless spray

AIRLESS SPRAY	BRUSH	ROLLER
PRESSURE: 1800-2500 psi TIP: .015"-.017"	Nylon/Polyester	Semi-Smooth Surfaces: 3/8"-1/2" nap Rough Surfaces: 3/4" - 1 1/2" nap

PACKAGING: Quart, one-gallon, five-gallon

STORAGE: Store in a dry area. Protect from freezing. Protect from temperatures above 110°F for extended periods of time. Extreme temperatures may cause paint to become unusable. See *Paint Storage Best Practices* Technical Bulletin at dunnedwards.com for more information.

CLEANUP: Warm, soapy water

DISPOSAL: For information on local options to dispose of unwanted leftover paint, call Dunn-Edwards Customer Service at 1-888-DEPAINT or visit www.dunnedwards.com. **Do not mix with other products.**

CONFORMS TO:

- ARB 2007/2022 SCM & CALGreen 2022
- LEED v4/4.1
- SCAQMD Rule 1113
- CA Extended Producer Responsibility
- MIR, HPD
- MPI Approved Product #10
- CRGI Green Wise Certified

SAFETY DATA SHEET: Available at www.dunnedwards.com

SURFACE PREPARATION: All surfaces must be cured, clean, dry, and free from dirt, dust, rust, stains, grease, oil, mildew, wax, efflorescence, bond-breakers, and other contaminants. Remove all loose, peeling, or chalky paint by sanding, scraping, or other appropriate methods. Repair all cracks, holes, and other surface imperfections with a suitable patching material. Repaired surfaces should then be sanded smooth and dusted clean. Glossy surfaces should be dulled to provide a roughened surface for good adhesion.

SPECIAL INSTRUCTIONS

- **CAUTION!** Scraping or sanding surfaces of older buildings (especially pre-1978) may release dust containing lead or asbestos. EXPOSURE TO LEAD OR ASBESTOS CAN BE VERY HAZARDOUS TO YOUR HEALTH. Wear a NIOSH-approved N100 particulate filter mask to avoid breathing dust. Use a HEPA vacuum for cleanup, and finish by water-washing all surfaces. For more information, see Dunn-Edwards brochure on "Surface Preparation Safety" or call U.S. EPA's lead hotline at 1-800-424-LEAD, or visit www.epa.gov/lead or /asbestos, or contact your state or local Health Agency.
- This product can neither cause nor prevent or cure the growth of mold, mildew, or other forms of fungus. Excessive moisture and inadequate ventilation are the main conditions that promote their growth. Correct any such conditions before painting.
- This paint contains a preservative which inhibits the growth of mildew on surface of this paint film.
- When the air temperature is at 35°F, substrates may be colder; prior to painting, check to be sure the air, surface, and material temperature are above 35°F and at least 5°F above the dew point. Avoid using if rain or snow is expected within 2-3 hours, as in colder temperatures, it may require longer time before the paint film cures enough not to be affected by rain or snow. Do not apply at air or surface temperatures below 35°F or when air or surface temperatures may drop below 35°F within 48 hours.
- Standard latex primers cannot be used below 50°F. See the specific primer product information sheet for that product's application conditions.
- While we recommend applying our exterior latex paints within industry standard temperature ranges, they can be applied at temperatures up to 120°F. Refer to www.dunnedwards.com/technical-bulletins/ for more information.



APPLY A HIGHER STANDARD™

EVERSHIELD®

Exterior Flat Paint EVSH10



≤ 50 g/L VOC**

PRODUCT INFORMATION

PRIMERS

MASONRY

- Stucco: } **EFF-STOP® Premium (ESPR00),**
- Tilt-up concrete: } **EFF-STOP® Select (ESSL00) or**
- Poured-in-place: } **FLEX-PRIME® Select (FPSL00)**
- Plaster: }
- Brick: }
- Concrete block: } **Smooth BLOCFIL™ Premium (SBPR00),**
- Smooth trowel: } **Smooth BLOCFIL™ Select (SBSL00) or**
- } **FLEX-PRIME® Select (FPSL00)**
- } **SUPER-LOC® Premium (SLPR00)**

WOOD

- Trim, sash, fascia: } **EZ-PRIME® Premium (EZPR00) or**
- Rough-sawn: } **EZ-PRIME® Select (EZPR00)**
- T1-11 siding: }

SYNTHETIC WOOD

- Masonite: } **ULTRA-GRIP® Premium (UGPR00) or**
- Hardboard: } **ULTRA-GRIP® Select (UGSL00)**
- MDO siding: }

METAL

- Ferrous: } **BLOC-RUST® Premium (BRPR00) or**
- } **ENDURAPRIME® Metal Primer (ENPR00)**
- Non-ferrous: } **ULTRASHIELD® Galvanized Metal Primer (ULGM00),**
- } **(ULGM00), BLOC-RUST® Premium (BRPR00) or**
- } **SUPER-LOC® Premium (SLPR00)**
- Galvanized steel: } **ULTRASHIELD® Galvanized Metal Primer (ULGM00) or**
- } ***ULTRA-GRIP® Premium (UGPR00)**

**for incidental use on galvanized*

***This product has been tested and certified by Coatings Research Group Inc., an international paint industry-organized ISO-accredited testing laboratory, to meet performance and environmental standards as shown on www.greenwisepaint.com. Dunn-Edwards is a member of CRGI.*

HEALTH & SAFETY CAUTIONS! INHALATION OF SPRAY MIST OR SANDING DUST MAY BE HARMFUL. Use only with adequate ventilation. Avoid breathing vapors, spray mist and sanding dust. Wear NIOSH-approved N100 particulate filter mask when spraying or sanding. Avoid contact with skin and eyes. Do not ingest. Close container after each use. **FIRST AID:** If swallowed, immediately give 1 or 2 glasses of water to drink – for emergency information, call 1-800-222-1222. If having difficulty breathing, move to fresh air. For eye contact, immediately flush with water for 15 minutes. For skin contact, wash thoroughly with soap and water.

• **KEEP OUT OF REACH OF CHILDREN** •

Ingredient (CAS #): Water (7732-18-5); Titanium Dioxide (13463-67-7); Copolymer Resin (Proprietary); Aluminosilicates (68476-25-5/37244-96-5); Quartz (14808-60-7).

⚠ **WARNING:** Cancer and Reproductive Harm – www.P65Warnings.ca.gov



APPLY A HIGHER STANDARD™

ULTRA-GRIP® Premium

Interior/Exterior Multi-Surface Primer UGPR00



≤ 50 g/L VOC**

ULTRA-GRIP® Premium is an ultra-low VOC, acrylic multi-surface primer designed for a wide range of interior and exterior applications. It provides excellent adhesion to properly prepared drywall, wood, and masonry, as well as hard-to-stick surfaces, such as aged alkyd, aluminum, galvanized metal, vinyl, fiberglass, and select plastics. **ULTRA-GRIP Premium** has outstanding stain blocking, strong tannin resistance, great hide, and excellent enamel holdout. It applies smoothly, dries fast, and is compatible with all Dunn-Edwards latex and alkyd finishes.

PRODUCT INFORMATION

SOLVENT TYPE: Waterborne		RESIN TYPE: Copolymer	
FINISH (ASTM D 523): 7–14% on a 60° meter			
COLORS: White. ULTRA-GRIP Premium may be tinted with up to 2 fl. oz. of Dunn-Edwards ZTC Zero VOC colorant per gallon.			
VISCOSITY@77°F/25°C (ASTM D 562): 95–105 KU			
MAXIMUM VOC CONTENT 50 g/L (as supplied)		MAXIMUM RAVOC (Reactivity-Adjusted VOC) 20 g/L	
SOLIDS BY VOLUME (ASTM D 2697) 39.9% ± 2%		SOLIDS BY WEIGHT 51.8 ± 2%	
WEIGHT PER GALLON (ASTM D 1475): 10.53 lbs.			
COMPOSITION BY WEIGHT			
Pigment—25.7%		Vehicle—74.3%	
*Prime pigments 13.2		Resin solids 23.3	
Reinforcing pigments..... 12.5		Water & additives 51.0	
<i>*Prime pigments include titanium dioxide (TiO²), plus all other pigments directly adding to the hiding power of this paint.</i>			
RECOMMENDED FILM THICKNESS PER COAT			
Wet: 4.9 mils		Dry: 1.5 mils	
PERFORMANCE SPECIFICATION			
Mandrel Bend Results: Pass ASTM D 522-B (No Cracking over 1/2" mandrel)			
Adhesion Results: Pass 100% ASTM D3359 (Birch)			
PRACTICAL COVERAGE PER COAT AT RECOMMENDED DRY FILM THICKNESS			
Approximately 275-350 sq. ft. per gallon, depending on surface conditions and application techniques.			
THINNING RECOMMENDATION: This coating is intended to be applied without thinning or diluting under normal environmental and application conditions. If necessary to maintain good workability, add up to 1/4 pint (4 fl. oz.) of clean water per gallon of coating.			
AVERAGE DRY TIME@77°F/25°C (ASTM D 1640)			
To touch: 1–2 hours		Recoat: 2–4 hours	
Dry times and recoat times are temperature, humidity and film thickness dependent.			
APPLICATION EQUIPMENT: Airless spray			

AIRLESS SPRAY	BRUSH	ROLLER
PRESSURE: 1800–2500 psi	Nylon/Polyester	Smooth Surfaces: 1/4" - 3/8" nap
TIP: .013"–.017"		Semi-Smooth Surfaces: 3/8" - 1/2" nap

PACKAGING: Quart, one-gallon, five-gallon containers

STORAGE: Store in a dry area. Protect from freezing. Protect from temperatures above 110°F for extended periods of time. Extreme temperatures may cause paint to become unusable. See *Paint Storage Best Practices* Technical Bulletin at dunnedwards.com for more information.

CLEANUP: Warm, soapy water

DISPOSAL: For information on local options to dispose of unwanted left-over paint, call Dunn-Edwards Customer Service at 1-888-DEPAINT or visit www.dunnedwards.com. **Do not mix with other products.**

CONFORMS TO:

- ARB 2007/2020 SCM & CALGreen 2022
- CA Section 01350
- LEED v4/4.1
- SCAQMD Rule 1113
- CA Extended Producer Responsibility
- MIR, HPD
- MPI Approved Product #17, #134
- CRGI Green Wise Gold Certified
- FDA Guidelines for Coatings

SAFETY DATA SHEET: Available at www.dunnedwards.com

SURFACE PREPARATION: All surfaces must be cured, clean, dry, and free from dirt, dust, rust, stains, grease, oil, mildew, wax, efflorescence, bond-breakers, and other contaminants. Remove all loose, peeling, or chalky paint by sanding, scraping, or other appropriate methods. Repair all cracks, holes, and other surface imperfections with a suitable patching material. Repaired surfaces should then be sanded smooth and dusted clean. Glossy surfaces should be dulled to provide a roughened surface for good adhesion.

SPECIAL INSTRUCTIONS

- **CAUTION!** Scraping or sanding surfaces of older buildings (especially pre-1978) may release dust containing lead or asbestos. **EXPOSURE TO LEAD OR ASBESTOS CAN BE VERY HAZARDOUS TO YOUR HEALTH.** Wear a NIOSH-approved N100 particulate filter mask to avoid breathing dust. Use a HEPA vacuum for cleanup, and finish by water-washing all surfaces. For more information, see Dunn-Edwards brochure on "Surface Preparation Safety" or call U.S. EPA's lead hotline at 1-800-424-LEAD, or visit www.epa.gov/leador / asbestos, or contact your state or local Health Agency.
- This product can neither cause nor prevent or cure the growth of mold, mildew, or other forms of fungus. Excessive moisture and inadequate ventilation are the main conditions that promote their growth. Correct any such conditions before painting.
- **ULTRA-GRIP® Premium (UGPR00)** seals and blocks out most household stains, such as crayon, pencil, ink, and felt marker. After priming stained areas, test that the stain has been sealed by applying the topcoat to a small area. More than one coat may be necessary on severe stains. **ULTRA-GRIP® Premium (UGPR00)** may block minor dried water stains, however, a solvent-based stain blocking primer, such as pigmented shellac, is recommended.
- Galvanized metal must be cleaned with a solvent or a water-soluble degreasing cleaner to remove all oils prior to etching. Change wiping material and cleaning solution frequently so the oils are removed from the surface, not just spread around. The surface should then be treated with an etching solution to promote proper adhesion of coatings.
- **ULTRA-GRIP® Premium (UGPR00)** can be used on bare ferrous metal surfaces (interior only) provided that they are free of rust, mill scale, and other contaminants. Before any surface preparation is attempted, oil and grease must be removed by employing SSPC-SP11 Power Tool Cleaning to Bare Metal to remove mill scale, rust, or other contaminants and to leave a roughened surface.
- Before applying over previously painted surfaces, **ULTRA-GRIP® Premium (UGPR00)** should be tested for adhesion and compatibility.
- On Level 4 and 5 Drywall Finishes, thin **ULTRA-GRIP® Premium (UGPR00)** with 10% of clean water (3/4 pint per gallon/1/2 gallon per 5-gallon) for best penetration.
- Do not apply when the air or surface temperature is below 50°F.



APPLY A HIGHER STANDARD™

ULTRA-GRIP® Premium

Interior/Exterior Multi-Surface Primer UGPR00



≤ 50 g/L VOC**

PRODUCT INFORMATION

PRIMERS

MASONRY & MASONRY: ULTRA-GRIP® Premium can be applied on surfaces with a pH of up to 13.

Drywall:
Stucco:
Concrete:
Brick:

} **ULTRA-GRIP® Premium (UGPR00)**

WOOD-INTERIOR

Trim, doors:

} **ULTRA-GRIP® Premium (UGPR00) or
DECOPRIME® (DCPR00)**

WOOD-EXTERIOR

Trim, sash:
T1-11 siding:

} **ULTRA-GRIP® Premium (UGPR00) or
EZ-PRIME® Premium (EZPR00)**

SYNTHETIC WOOD

Masonite:
Hardboard:

} **ULTRA-GRIP® Premium (UGPR00)**

METAL

Ferrous:

} **BLOC-RUST® Premium (BRPR00) or
ENDURAPRIME® Metal Primer (ENPR00)**

Non-ferrous:

} **ULTRA-GRIP® Premium (UGPR00),
ULTRASHIELD® Galvanized Metal Primer (ULGM00) or
SUPER-LOC® Premium (SLPR00)**

Galvanized steel:

} **ULTRASHIELD® Galvanized Metal Primer (ULGM00) or
*ULTRA-GRIP® Premium (UGPR00)**

OTHER SURFACES

Fiberglass:
Plastic:

} **ULTRA-GRIP® Premium (UGPR00) – INTERIOR ONLY**

**for incidental use on galvanized*

****This product has been tested and certified by Coatings Research Group Inc., an international paint industry-organized ISO-accredited testing laboratory, to meet performance and environmental standards as shown on www.greenwisepaint.com. Dunn-Edwards is a member of CRGI.**

HEALTH & SAFETY CAUTIONS! INHALATION OF SPRAY MIST OR SANDING DUST MAY BE HARMFUL. Use only with adequate ventilation. Avoid breathing vapors, spray mist and sanding dust. Wear NIOSH-approved N100 particulate filter mask when spraying or sanding. Avoid contact with skin and eyes. Do not ingest. Close container after each use. **FIRST AID:** If swallowed, immediately give 1 or 2 glasses of water to drink – for emergency information, call 1-800-222-1222. If having difficulty breathing, move to fresh air. For eye contact, immediately flush with water for 15 minutes. For skin contact, wash thoroughly with soap and water.

• **KEEP OUT OF REACH OF CHILDREN** •

Ingredient (CAS #): Water (7732-18-5); Copolymer Resin (Proprietary); Titanium Dioxide (13463-67-7); Aluminosilicates (68476-25-5/37244-96-5); Talc, No Asbestos (14807-96-6); Quartz (14808-60-7).

WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov