

Center Grove High School Football Bleachers



Originally installed: 1975

Updated: 2000

Summary: Home Side Bleachers

- SAFETY

- Galvanization is thin and beginning to lose its ability to protect the steel.
- A large percentage of the nuts and bolts that hold the system together are rusted and will continue to deteriorate, more rapidly than in the past
- Misalignment or shifting of “stringers”, which don’t meet current load requirements
- The connections of the columns to the foundation only used two of the four available holes in the base plates

- ACCESSIBILITY

- Handicap seating is substantially under the required amount necessary, location does not meet the intent of the code

Visitor Bleachers



Summary: Visitor Side Bleachers

- SAFETY

- No apparent foundation system
- No evidence of any anchorage system
- Footboards improperly installed
- No chain link fence along the front walkway


- ACCESSIBILITY

- No provisions for handicap accessible seating

Capacity

SCHOOL	ENROLLMENT	HOME	VISITORS	OTHER	TOTAL
Ben Davis	4220	5000	3500	500	9000
Warren Central	3602	5500	3500		9000
North Central	3518	4000	3000		7000
Carmel	4830	3773	2461		6234
Brownsburg	2436	3755	1153	600	5508
Greenwood	1160	3500	1500		5000
Pike	3159	3500	1500		5000
Center Grove (current)	2455	2663	450	900	4013
Lawrence North	2277	3000	1000		4000
Lawrence Central	2314	2500	1000		3500
Whiteland	1763	2700	750		3450
Franklin Community	1630	2063	1054		3117
Sources: IDOE and school athletic directors					

Proposed Design

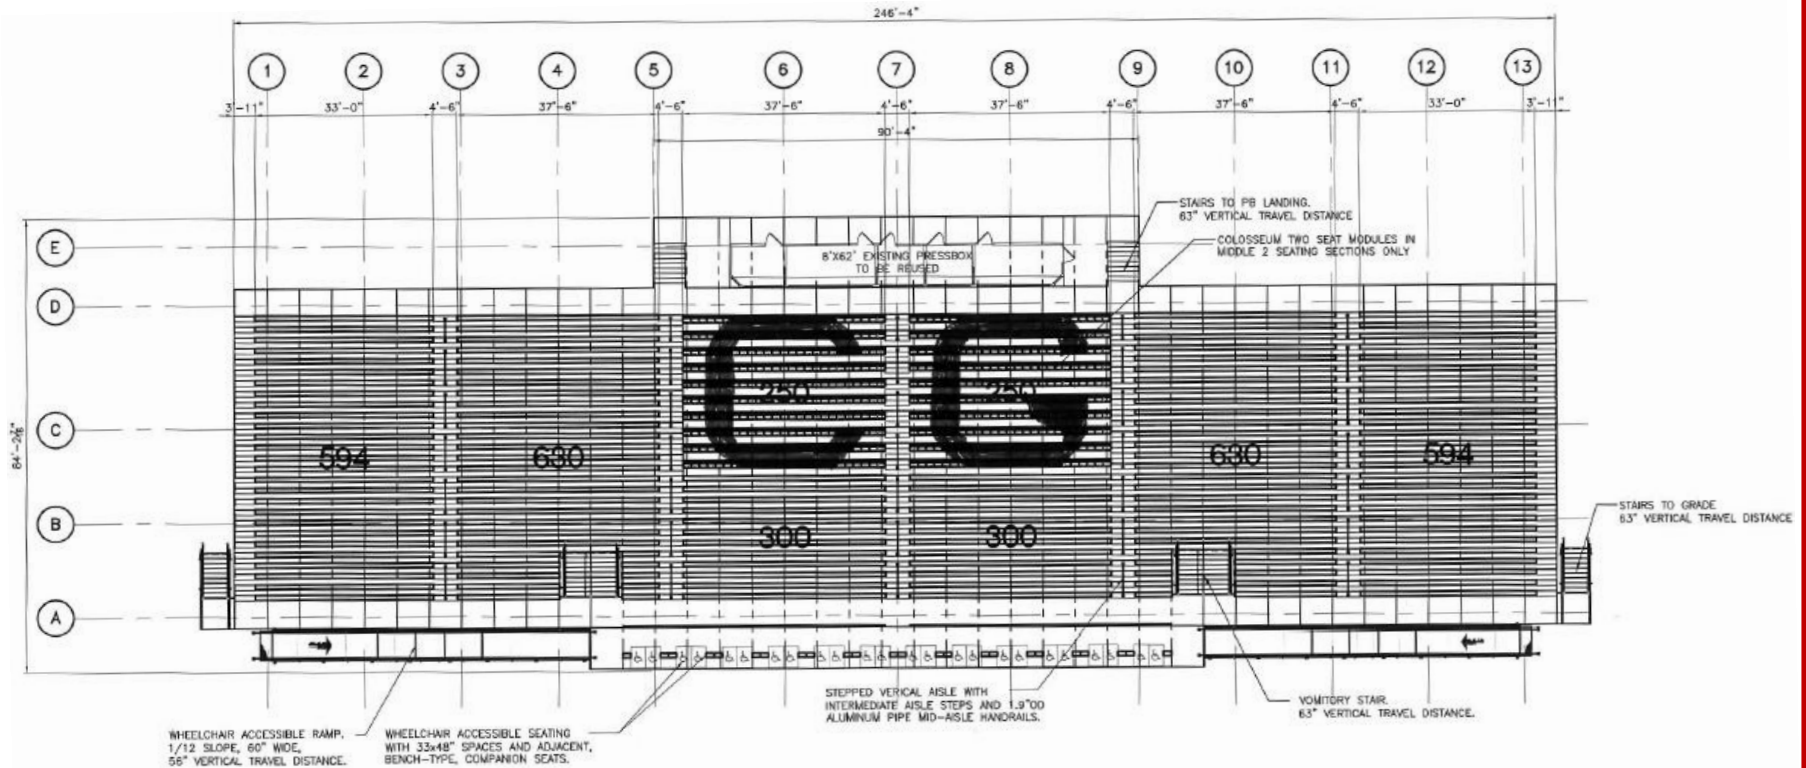

	HOME	VISITORS	OTHER (North)	TOTAL
Current	2663	450	900	4013
Proposed	3696	1290	900	5886
Change	1033	840	--	1873

Proposed Cost

EQUIPMENT COST	\$1,378,680	
DOWN-PAYMENT	(\$350,000)	8/1/2016
PAYMENT SCHEDULE		
	(\$250,000)	10/1/2017
	(\$250,000)	10/1/2018
	(\$250,000)	10/1/2019
	(\$250,000)	10/1/2020
	(\$250,960)	10/1/2021