


Midwest
Environmental
Consulting, L.L.C.



♻️ Printed on Recycled Paper

**Eastern Heights Elementary
Saint Paul Public Schools**

Lead-Based Paint Inspection

Inspection Dates: 6/5/97, 6/3/97, 6/6/97, 6/7/97

submitted to:

Saint Paul Public Schools

MEC Project # 62/0197AH

38894 Llama Street NW * Dalbo, Minnesota 55017 * (612) 689-3612
fax (612) 689-5209

INTRODUCTION

At the request of Saint Paul Public Schools Environmental Safety Department, Midwest Environmental Consulting, L.L.C. (MEC), conducted a lead-based paint inspection at Eastern Heights Elementary, 2001 Margaret Street, St. Paul, MN. The purpose of this inspection was to identify lead-based painted, varnished, or otherwise coated building components on the interior and exterior of the school building.

The inspection protocol incorporated applicable portions of the U.S. Department of Housing and Urban Development (HUD) *Guidelines for the Evaluation and Control of Lead-based Paint Hazards in Housing* (HUD Guidelines, June 1995) and OSHA 1926.62 requirements (Lead in Construction). The HUD guidelines are formulated to guide agencies in conducting random sampling of the interiors and exteriors of dwellings and common areas in public housing. The OSHA requirement is designed to minimize worker exposure when working with material containing lead.

Confirmatory testing was conducted when inconclusive XRF results were encountered. Inconclusive refers to XRF readings less than 0.2 mg/cm² (milligrams per square centimeter). Inconclusive results were confirmed with laboratory analysis of paint chip samples (Appendix B). This report contains a list of such results.

The United States Environmental Protection Agency defines "lead-based paint" as a paint or other surface coating that contains lead equal to or in excess of 1.0 milligrams per square centimeter when analyzed by XRF or more than 0.5% by weight (5000 parts per million) by laboratory analysis of a bulk sample.

Minnesota Department of Labor and Industry (MN OSHA) adopted the EPA lead levels for the purpose of enforcing OSHA 1926.62 federal regulations. Detection of lead in dried paint film by XRF is a dependable indicator of levels of lead and is accepted by MN OSHA.

For this Saint Paul Public Schools Lead Inspection, all building components were tested on site using a Niton XL® X-ray Fluorescence Spectrum Analyzer⁽¹⁾. Building components included walls, ceilings, floors, moldings, window and door components, door surfaces, and miscellaneous features such as shelves or bookcases. Only painted or glazed surfaces or surfaces which were varnished were tested. Suspended ceilings, structural steel, and corrugated decking were not included in the inspection. Neither anodized (e.g., window sashes) nor plastic (e.g., vinyl baseboard and vinyl mini-blinds) were included in the scope of this inspection.

⁽¹⁾ This is a portable hand held machine that can analyze building components instantly for lead concentrations.

Each building was divided into unique sites based on the year of construction or renovation. Portable classrooms, playgrounds, and other detached buildings were automatically designated as a unique site. Each site was inspected independently assuming differences in painting history and construction characteristics.

SITE DESCRIPTION AND BUILDING HISTORY

According to information provided to MEC by Saint Paul Public Schools, Eastern Heights Elementary was constructed in essentially four phases. The initial phase includes the 11,225 square-foot older section of the building and dates from 1930. The second phase is a 26,844 square foot addition dating from 1952. The third phase is a 8,960 square foot addition from 1970. The fourth addition is 30,302 square-feet from 1990.

The 1990 addition was not inspected.

All room and area designations used in this report are depicted on sampling maps found in Appendix A.

XRF SAMPLE RESULTS TABLE

The results of all samples analyzed are listed in the table at the end of this section. The following is a description of the column headings:

Site	Each school is divided into sites based on their unique construction characteristics. Each site has a unique date of construction or major renovation.
Sample #	Each sample taken was given a unique number to identify the type and location of the sample. The sampling date is an integral part of the sample number.
Analysis	This defines the type of analysis which can be categorized into two types: 1) XRF: This is an on-site analysis using a hand held Niton XL® X-ray Fluorescence Spectrum Analyzer; 2) Bulk or Chip: This is a bulk sample where paint is removed from the substrate and sent to a laboratory for analysis;
Floor	This is the level of the building in which the area tested was found, example, 1 (first floor), 0 (basement), etc.

- Area** This further defines the specific functional space inspected such as a classroom, exterior, playground, gym, kitchen, etc.
- Room #** This is typically the actual number on the room as identified at the building.
- Component** Building "components" included walls, ceilings, floors, moldings, window and door components, door surfaces, and miscellaneous features such as shelves or bookcases.
- Feature** Identifies more detailed information of the component.
- Condition** This describes condition of the surface, whether it is intact, cracked, peeling, or chalking.
- Substrate** This refers to the material the building component is made of (wood, concrete, drywall, metal, etc.).
- Result** This is the analysis results for lead. Less than 1.0 mg/cm² or less than 0.5% by weight is considered to be non-lead and these building components are below the action levels of EPA and HUD. (All results are in mg/cm² except where noted.)

The table of results is designed for quick information on lead concentrations of tested building components. Generally, all repetitions of a test combination within a given room or area, may be assumed to contain similar concentrations of lead to that of the tested sample. For instance, the lead concentration of a tested wooden window sash was found to be above the action level of 1.0 mg/cm² in a given classroom. The classroom has five windows, all of wood, the same color and appearing to be of the same era. It can be assumed that the remaining four wooden window sashes each contain lead above the action limit.

Other columns identify the component and the component feature tested, condition of the component, type of substrate and the result of the analytical test.

As an example, the following illustration shows that the wooden door jamb in Room 123, first floor in the 1923 building section was in good, solid condition, and had an XRF test result of 0.3 mg/cm², which is below the action level.

Illustration Only

Site	Sample #	Date	Analysis	Floor	Area	Room #	Component	Feature	Condition	Substrate	Results
1923 Bldg.	52		XRF	1	Room	123	Door	Jamb	Solid	Wood	0.3

In a similar manner, the table shows that the plaster walls in room 23, on the second floor has peeling paint with more than 1.0 mg/cm² (shaded).

ILLUSTRATION ONLY

Site	Sample #	Date	Analysis	Floor	Area	Room #	Component	Feature	Condition	Substrate	Results
1910 Bldg.	16		XRF	2	Room	23	Door	Jamb	Peeling	Wood	0.25
1910 Bldg.	17		XRF	2	Room	23	Wall	Wall	Peeling	Plaster	1.2
1910 Bldg.	18		XRF	2	Room	23		Ceiling	Peeling	Plaster	0.25
1910 Bldg.	19		XRF	2	Room	23	Wall	Baseboard	Peeling	Wood	0.002

APPLICABLE REGULATIONS

When building components test above 1.0 mg/cm² of lead by XRF or 0.5% lead by weight from laboratory analysis all employees and contractors who will be working with these components in a construction related activity must be notified. The requirements of OSHA 1926.62, Lead in Construction are enforceable. This regulation defines construction work as "work for construction, alteration and/or repair, including painting and decorating." This regulation further defines monitoring requirements to minimize employee exposure to lead during construction activities.

When work is performed on external painted building structures (i.e. flashing, fire escapes, playground equipment, handrails, etc.), regulations of the Minnesota Pollution Control Agency (MPCA) may also be applicable. For removal of lead based paint from steel structures, MN Rules 7025.0200 - 7025.0380 apply to steel materials on the exterior of a building, or on the property when levels exceed 0.5 mg/cm² based on the average of three XRF spectrum results of the sample tested, or 5,000 ppm by laboratory analysis. If it is other than a steel surface, then MPCA regulates the painted surfaces under MN Rules 7025.010 - 7025.0080, when surfaces are to be disturbed using abrasive blasting methods.

Please contact MEC directly if you have questions about any portion of this report or the lead-based paint inspection itself.

APPENDIX A

**XRF TESTING DATA
WITH
LOCATION MAPS**

A 6-6-97

6-7-97 X = Soil Sample

TYPE 30 ALPHAS	3.39
SPACES 30 PT	147.140
PAINTING 30 PT	2.290
PLAY 30 PT	0
TYPE SHORWALL LIN. PT	116
PUBLIC SHORWALL LIN. PT	400
GRASS 30 PT	313.195
BOUNDARY 30 PT	6.320
PRICE LIN. PT	0
MOSES LIN. PT	0
SITE TREES	75
BOUNDARY TREES	12

MARGARET STREET

[illegible]

603 X 18 X 18 X

WOLFFHART M&B

MOBILE TEAM

7/25/68

RECEIVED 1965 MAR 1

00
1974 1974

~~PLAY AREA~~

20" x 12" BLYTHWORTH
PARKING FOR 10 CARS

011
7

[illegible]


CONF. NAME: N300-

DATE
ENTER DATE

IN THE EASTERN DISTRICT OF MICHIGAN

PLATE - 14

4
11/17/11 10:09

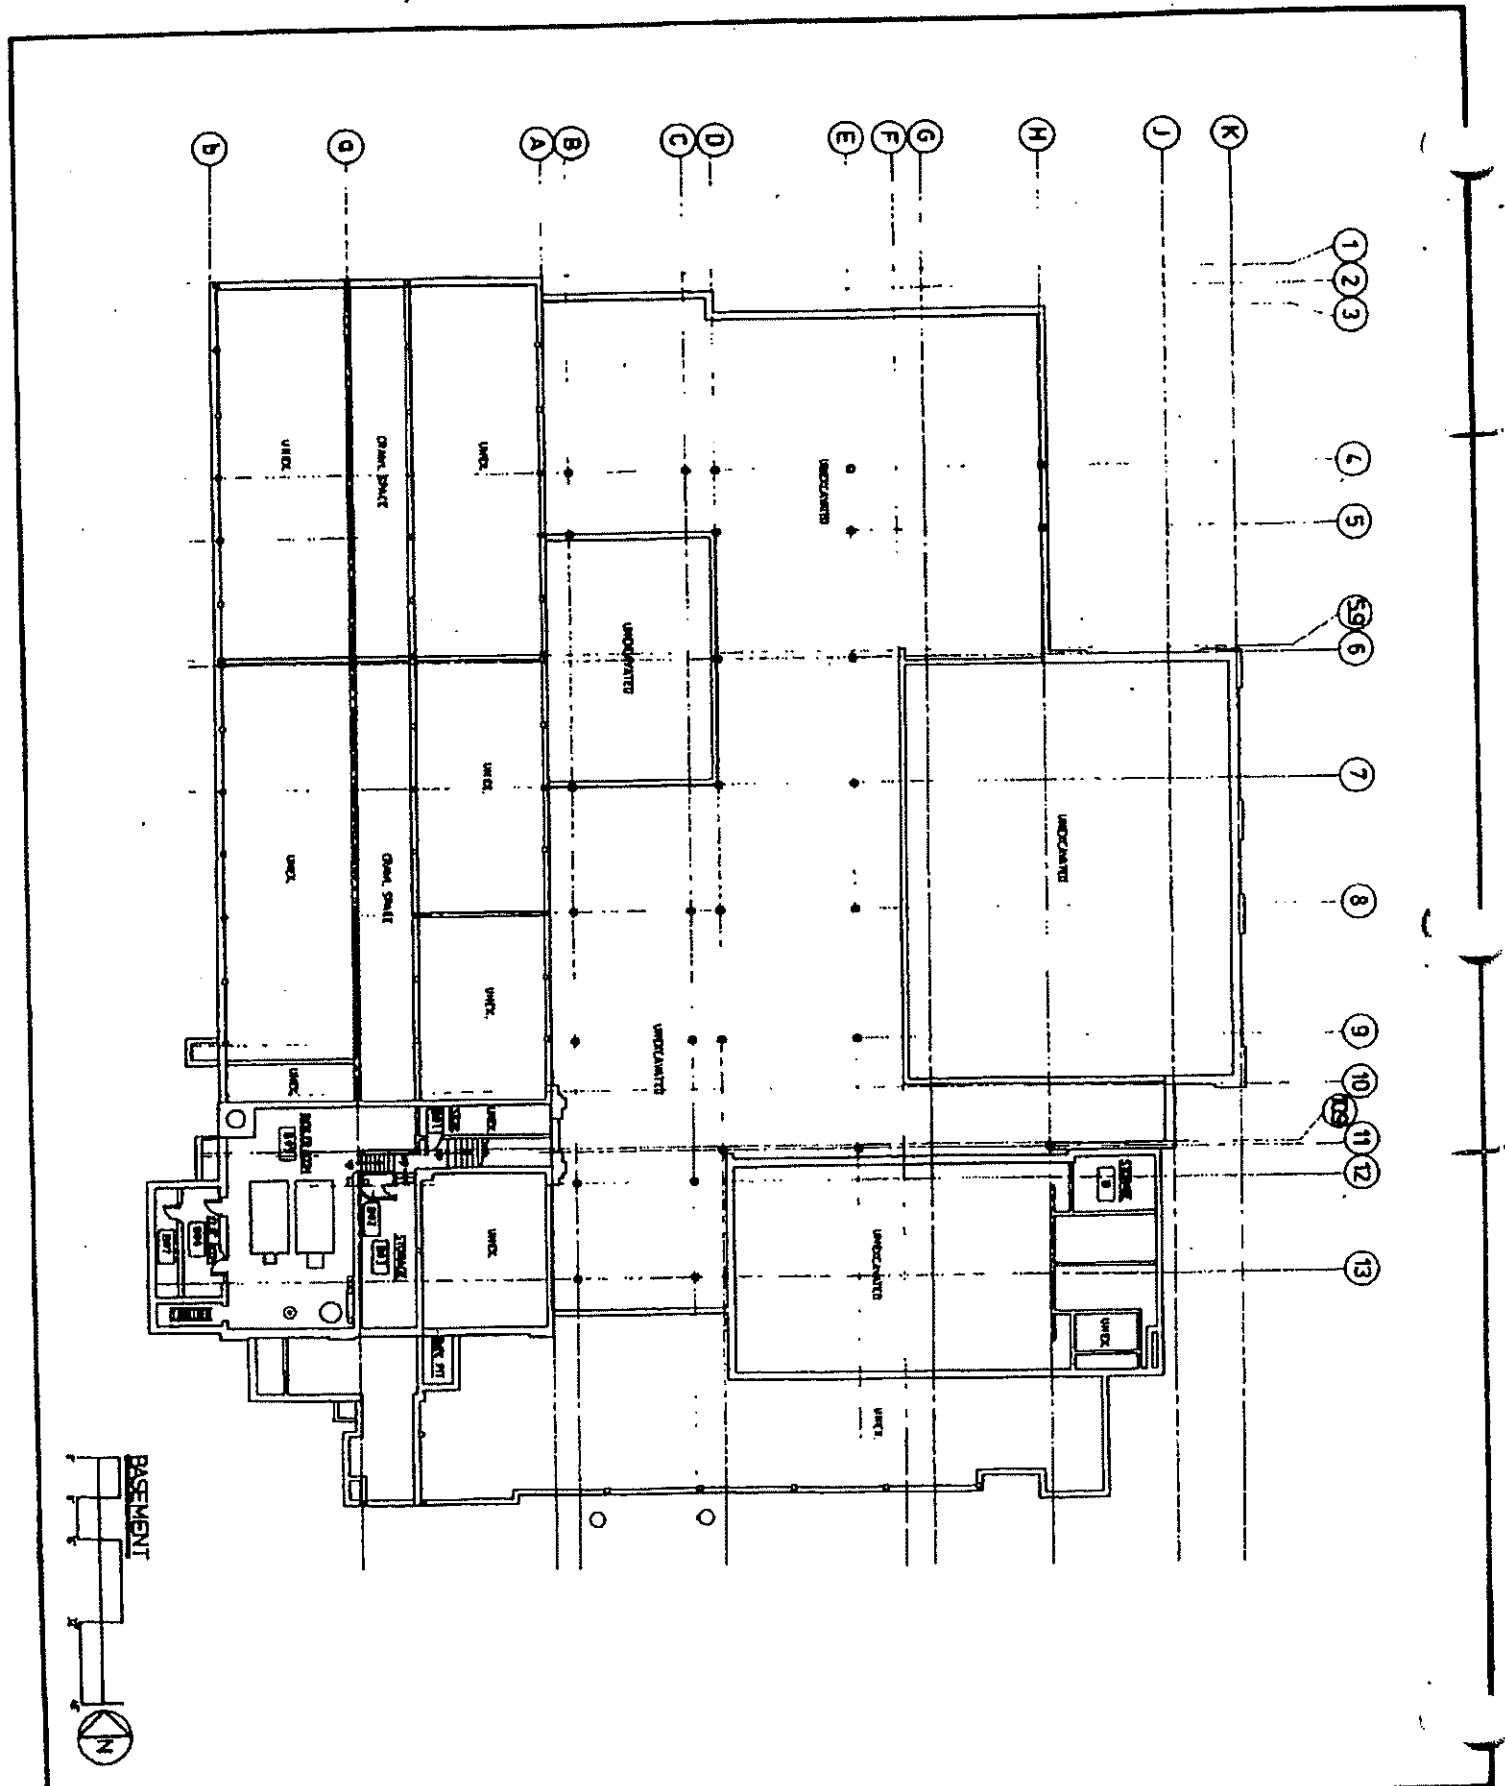


INDEPENDENT SCHOOL DIST #625
380 COLBORNE STREET
ST. PAUL, MINNESOTA 55102

EASTERN HEIGHTS ELEMENTARY
2001 MARGARET STREET
ST. PAUL, MN 55119


CONSTRUCTED:

2
6

[illegible]

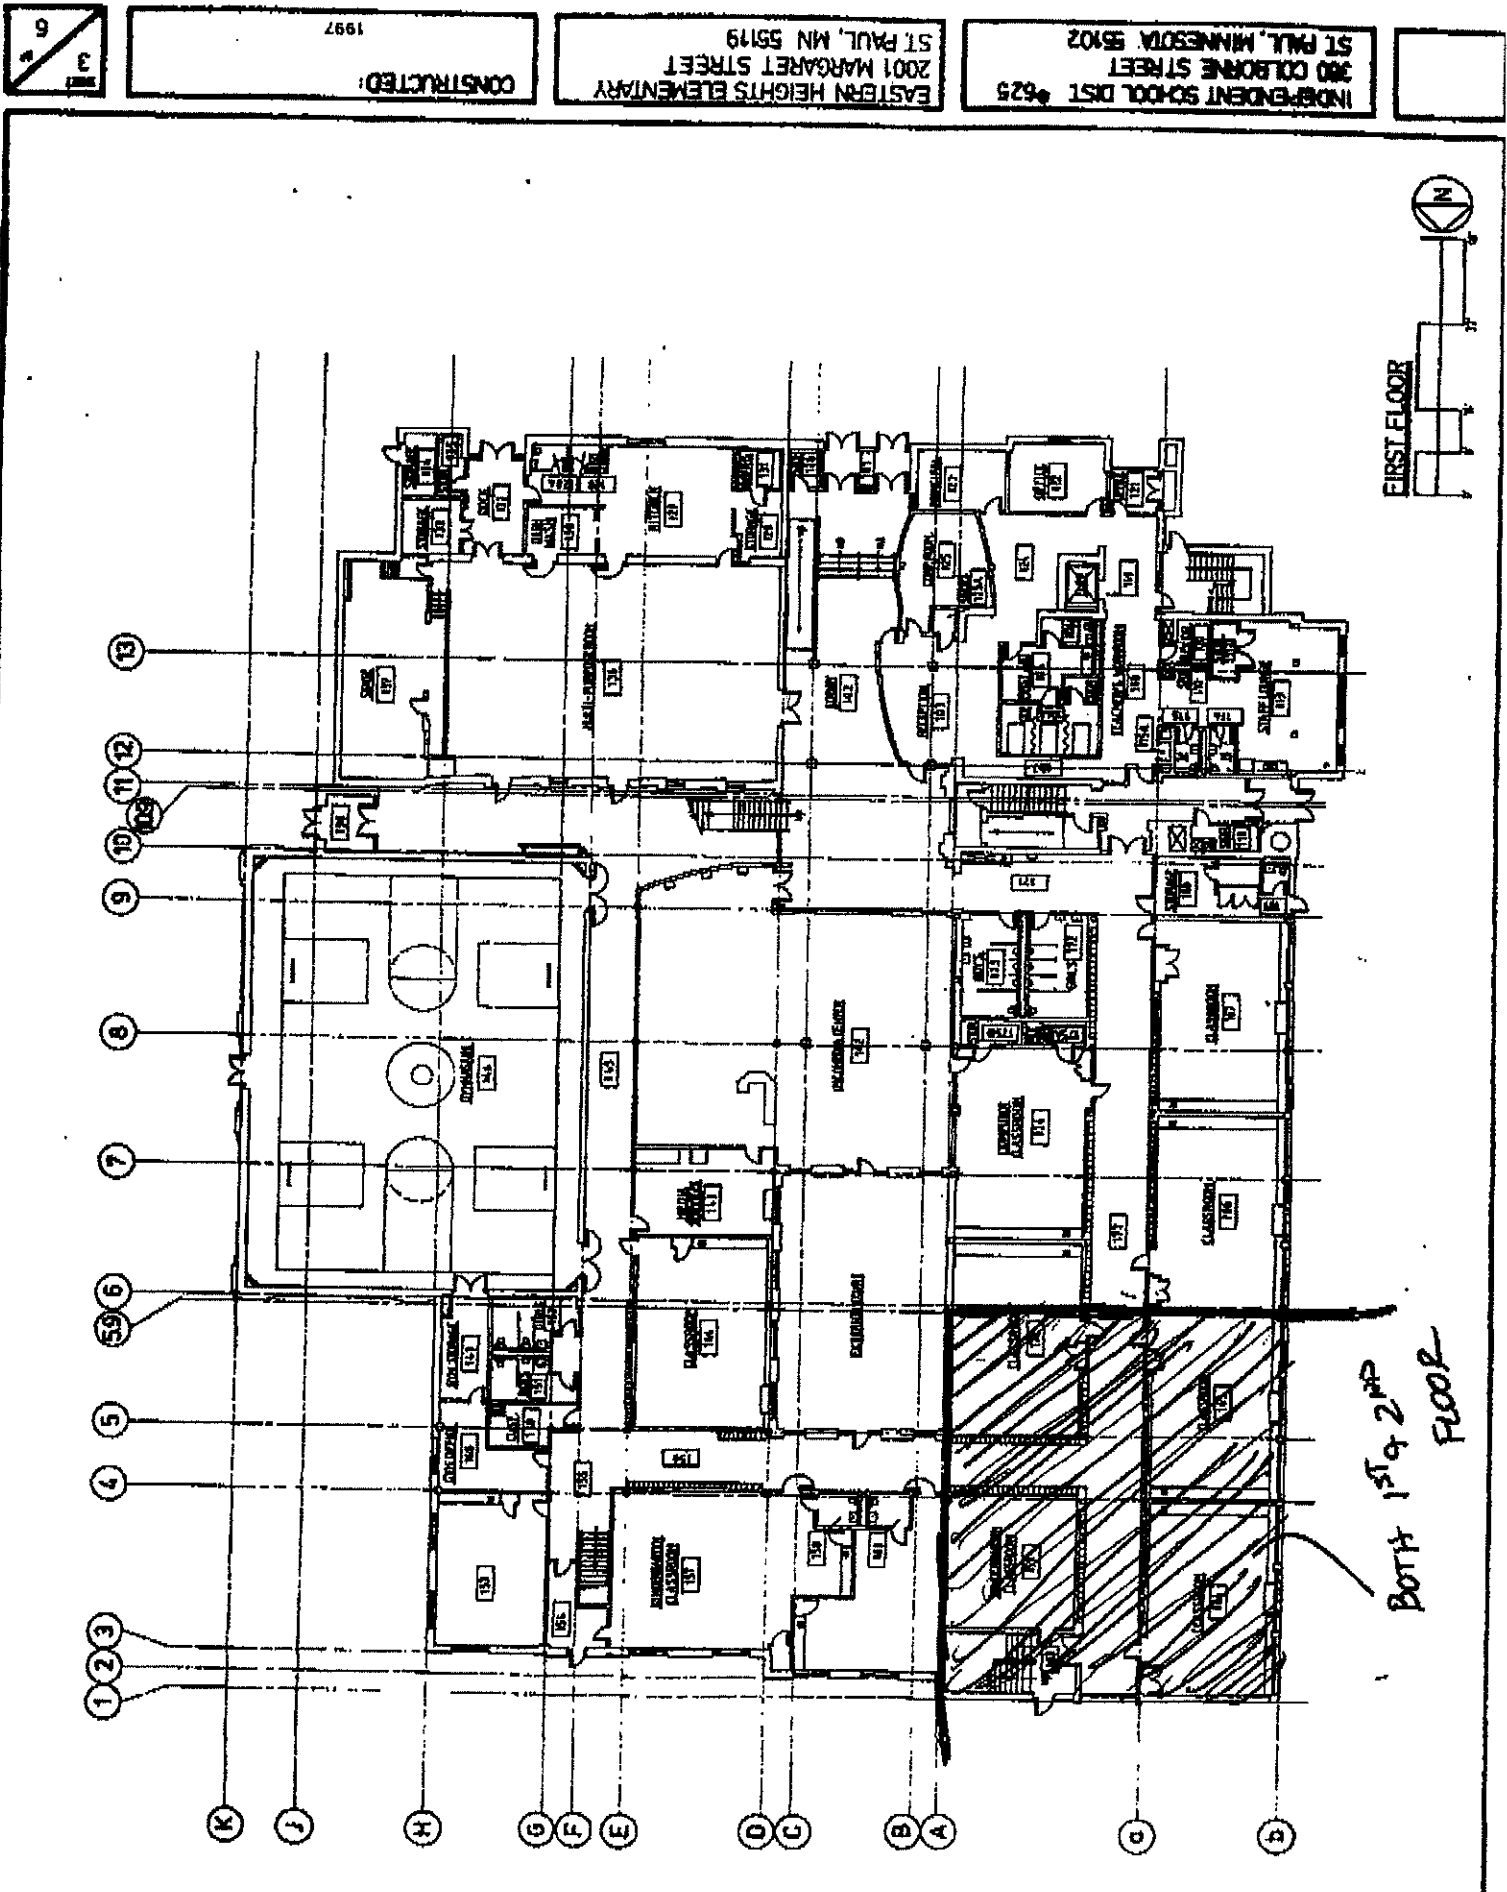

- 9
- 10
- 109
- 11
- 12
- 13

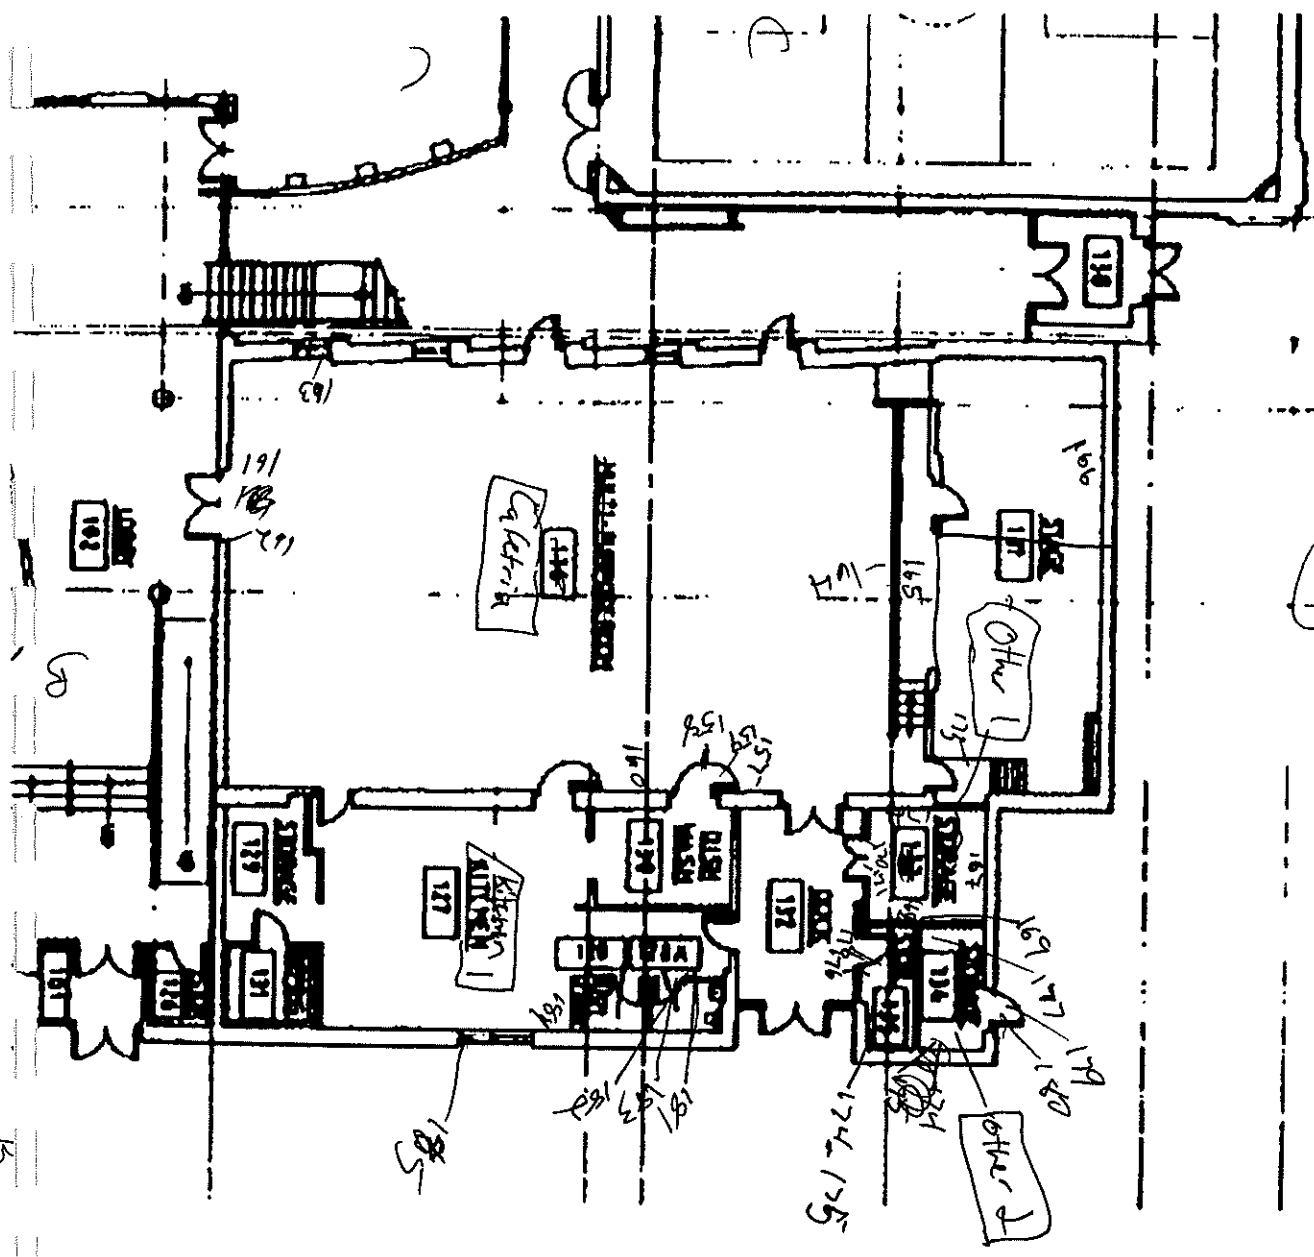


6-3-97
1st Floor


ERN HEIGHTS ELEMENTARY
MARGARET STREET
AUL, MN 55119

CONSTRUCTED:


FIRST FLOOR

6-93-92

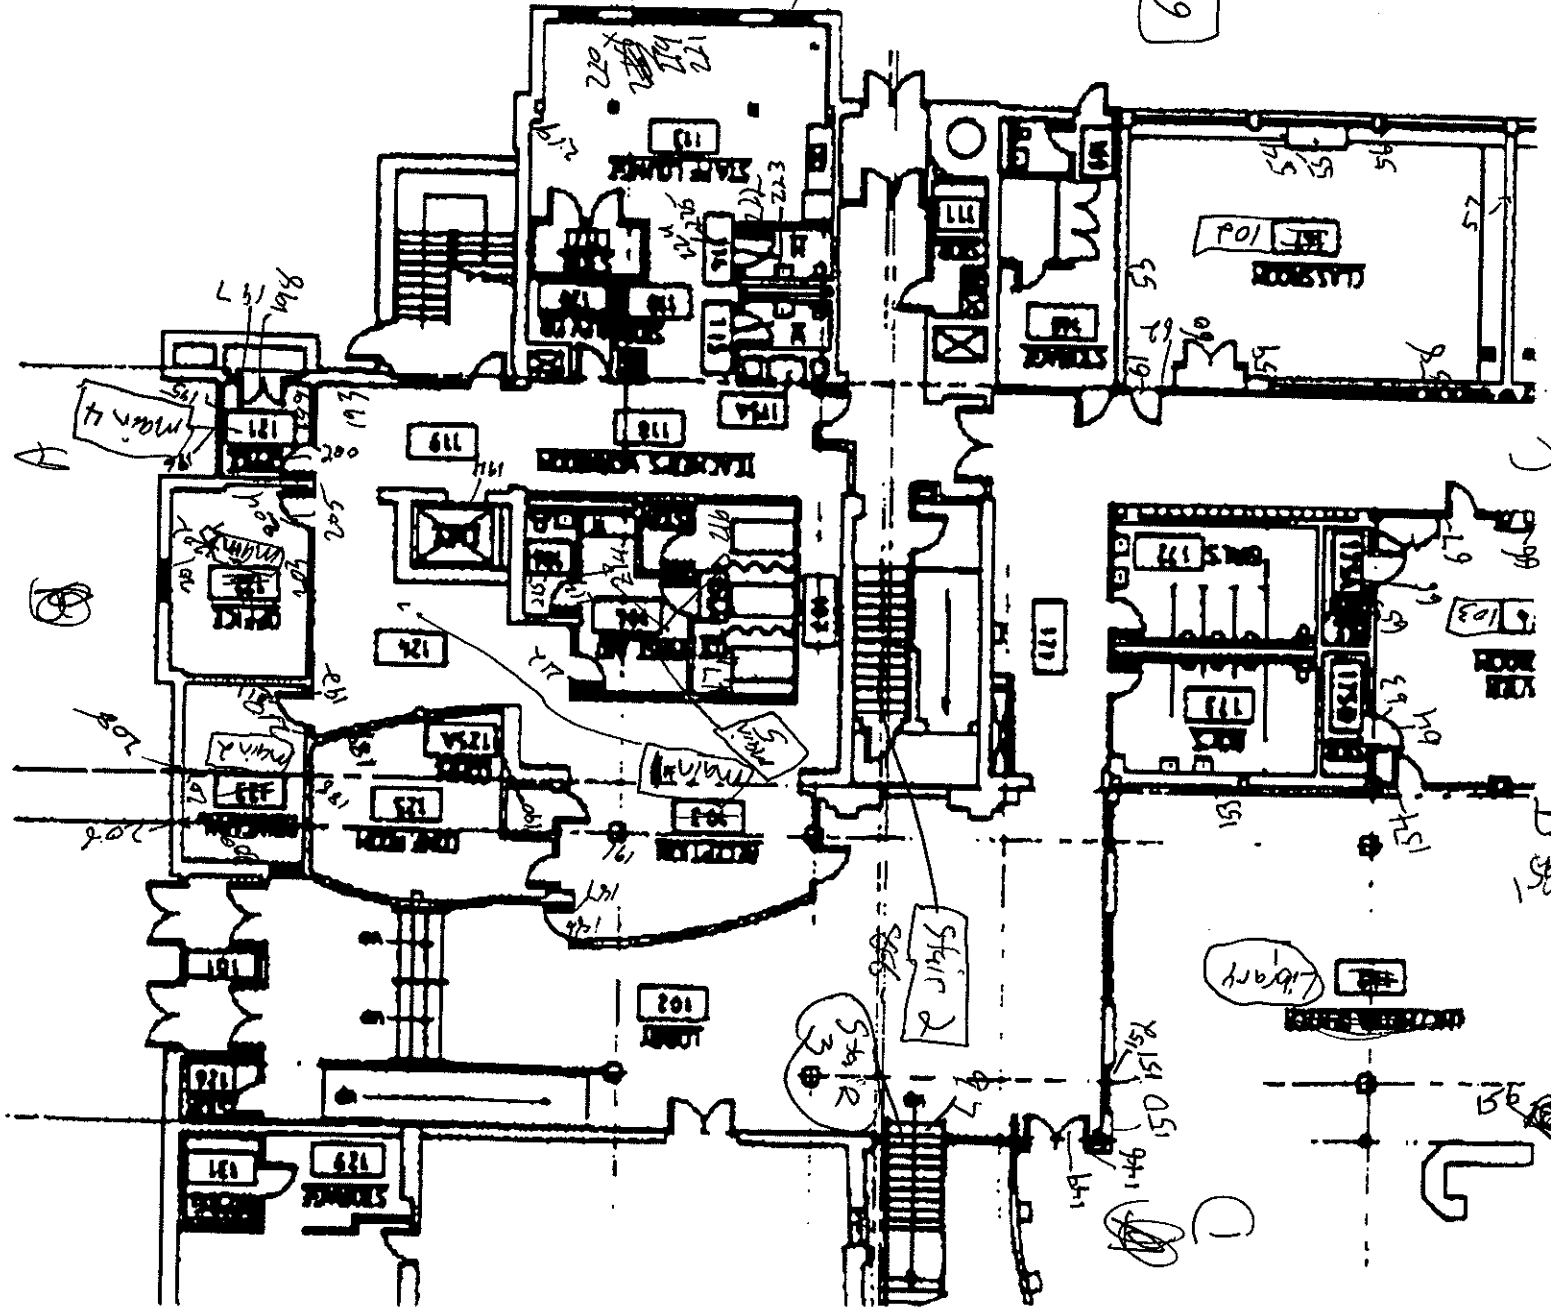


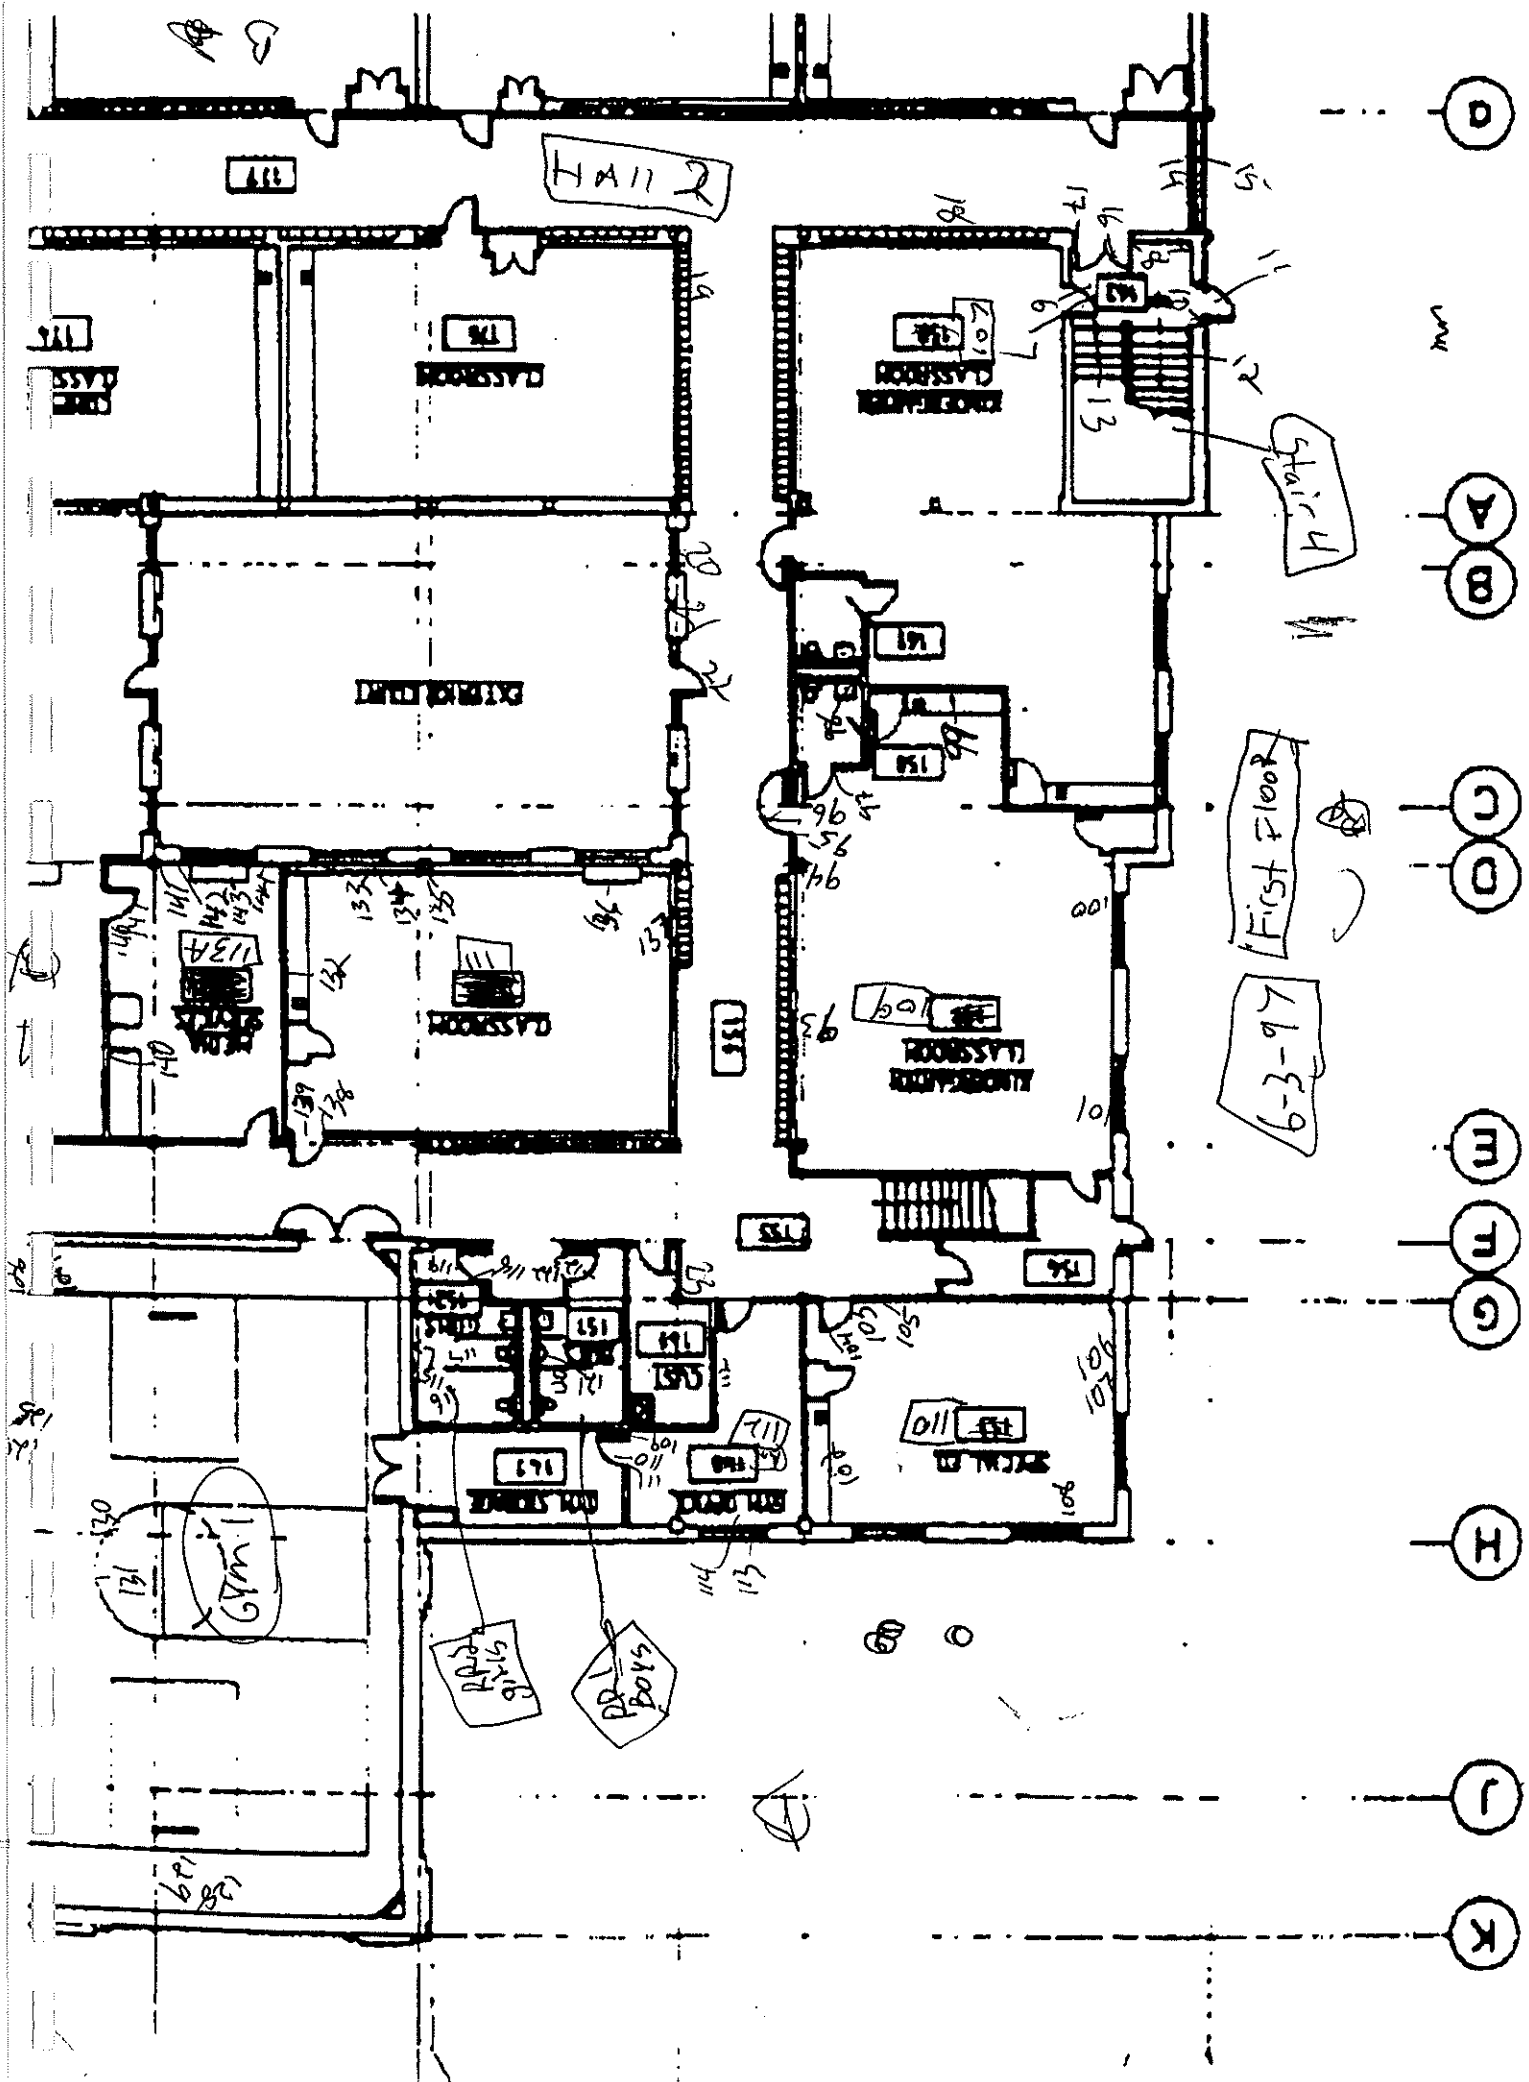



Sent by: MRIVNE TSEWDIM 6126895209

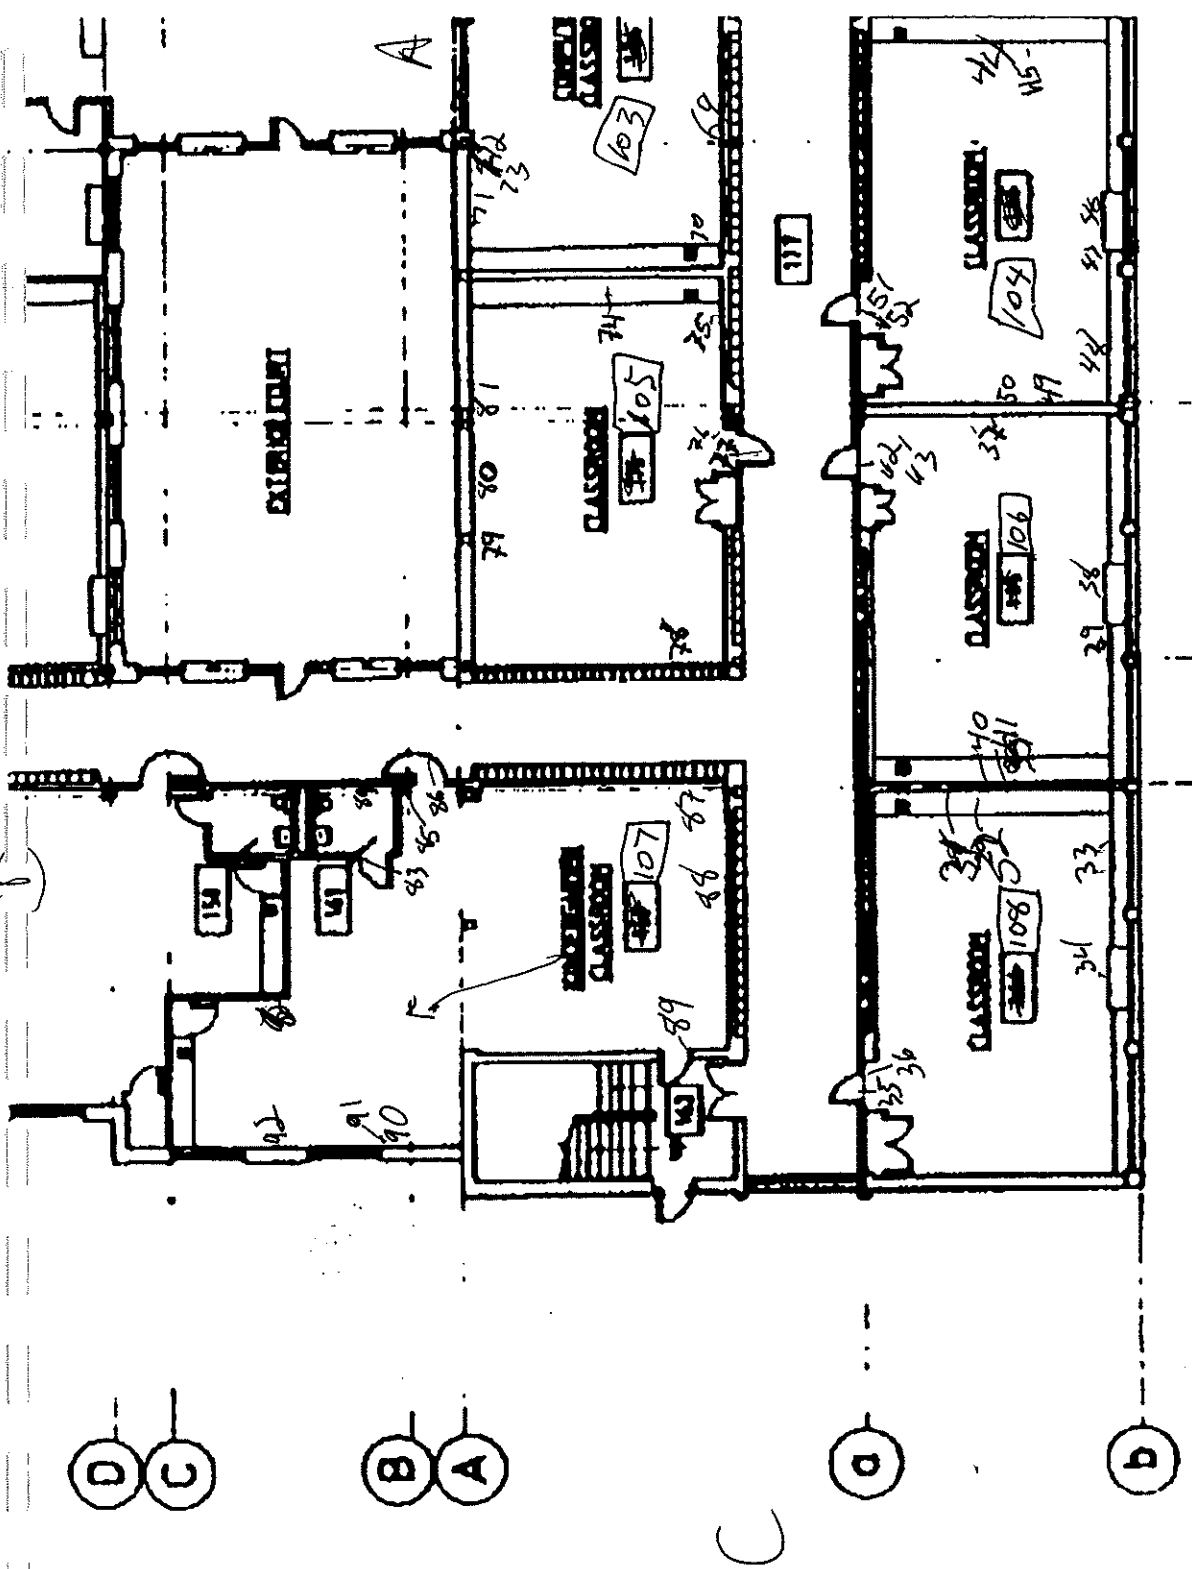



6-3-97
1st Floor

SECOND FLOOR

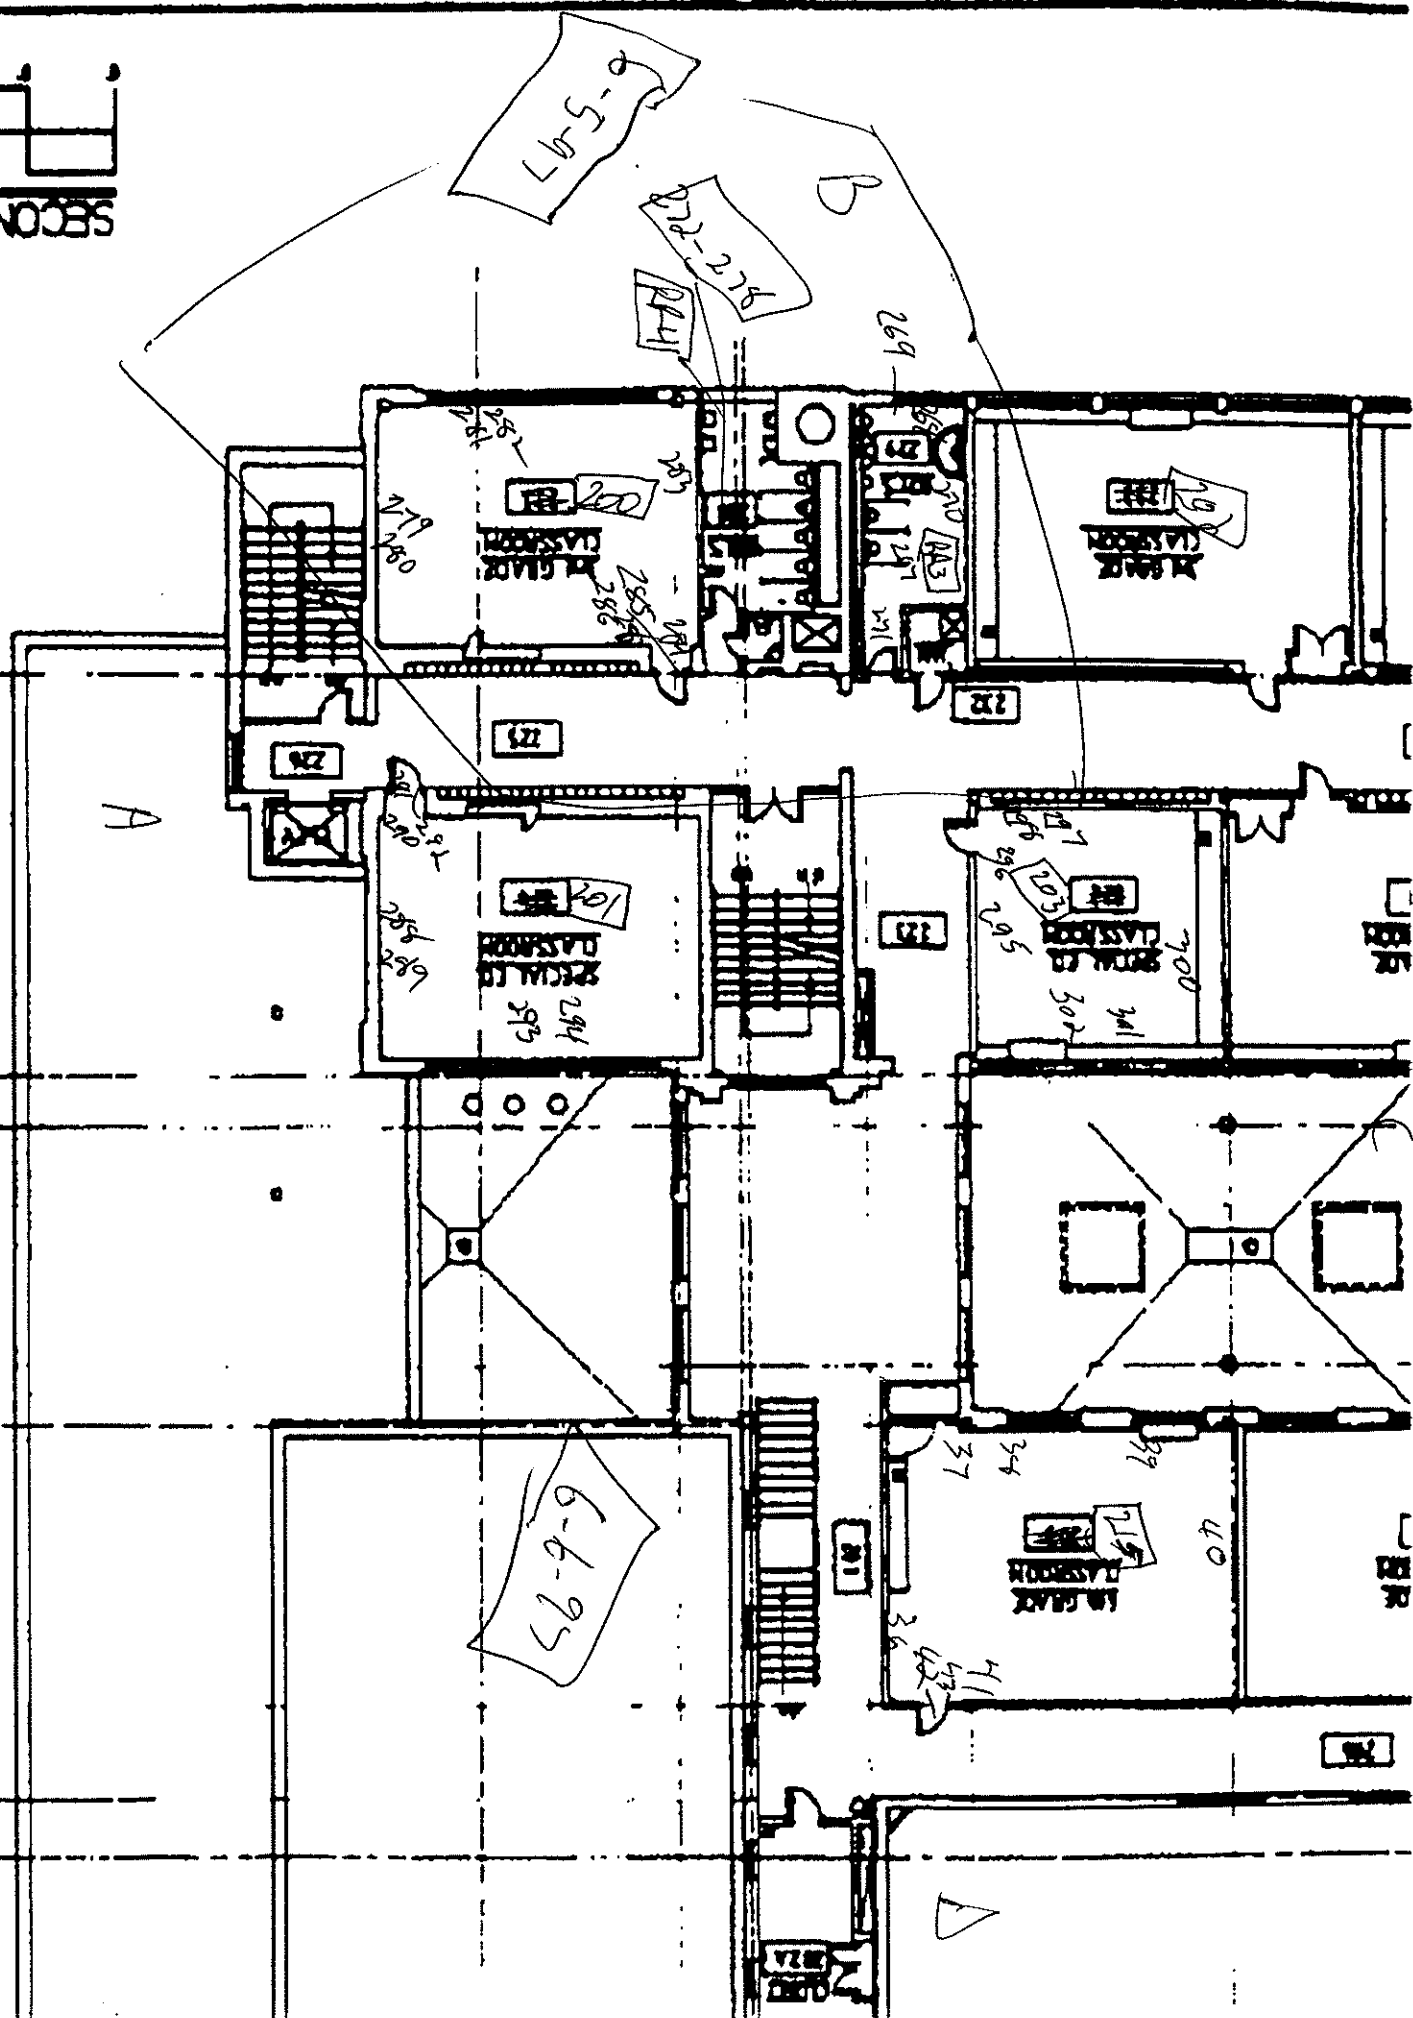


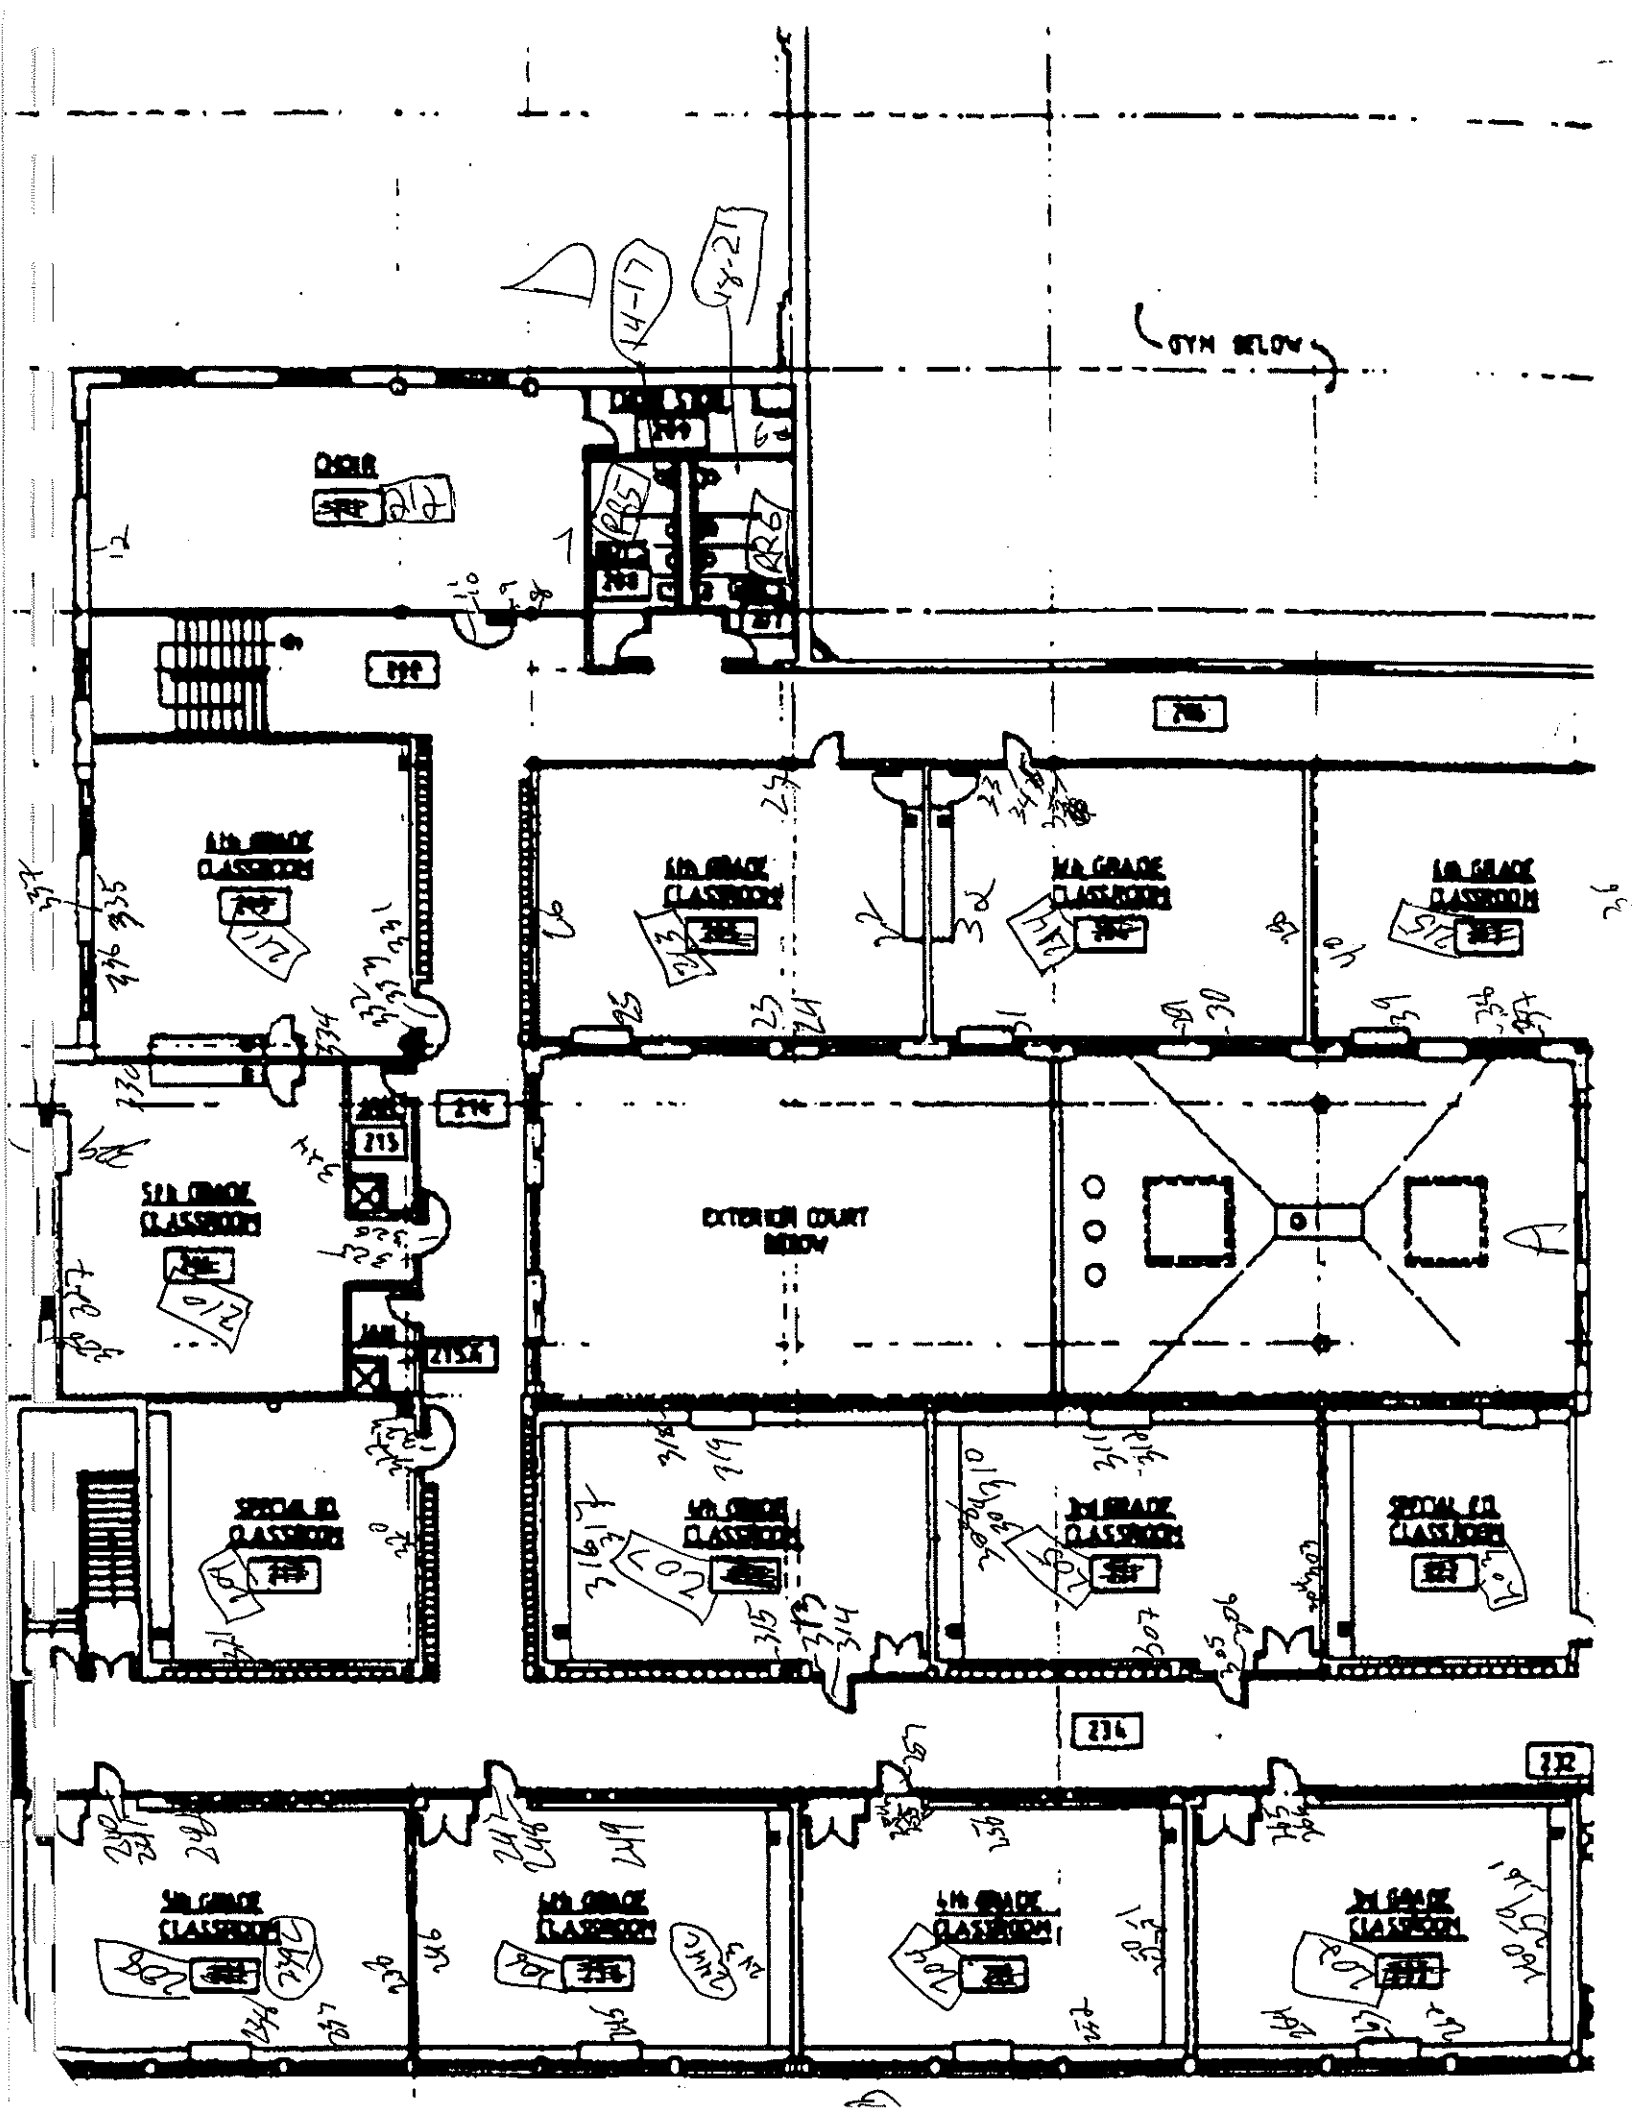

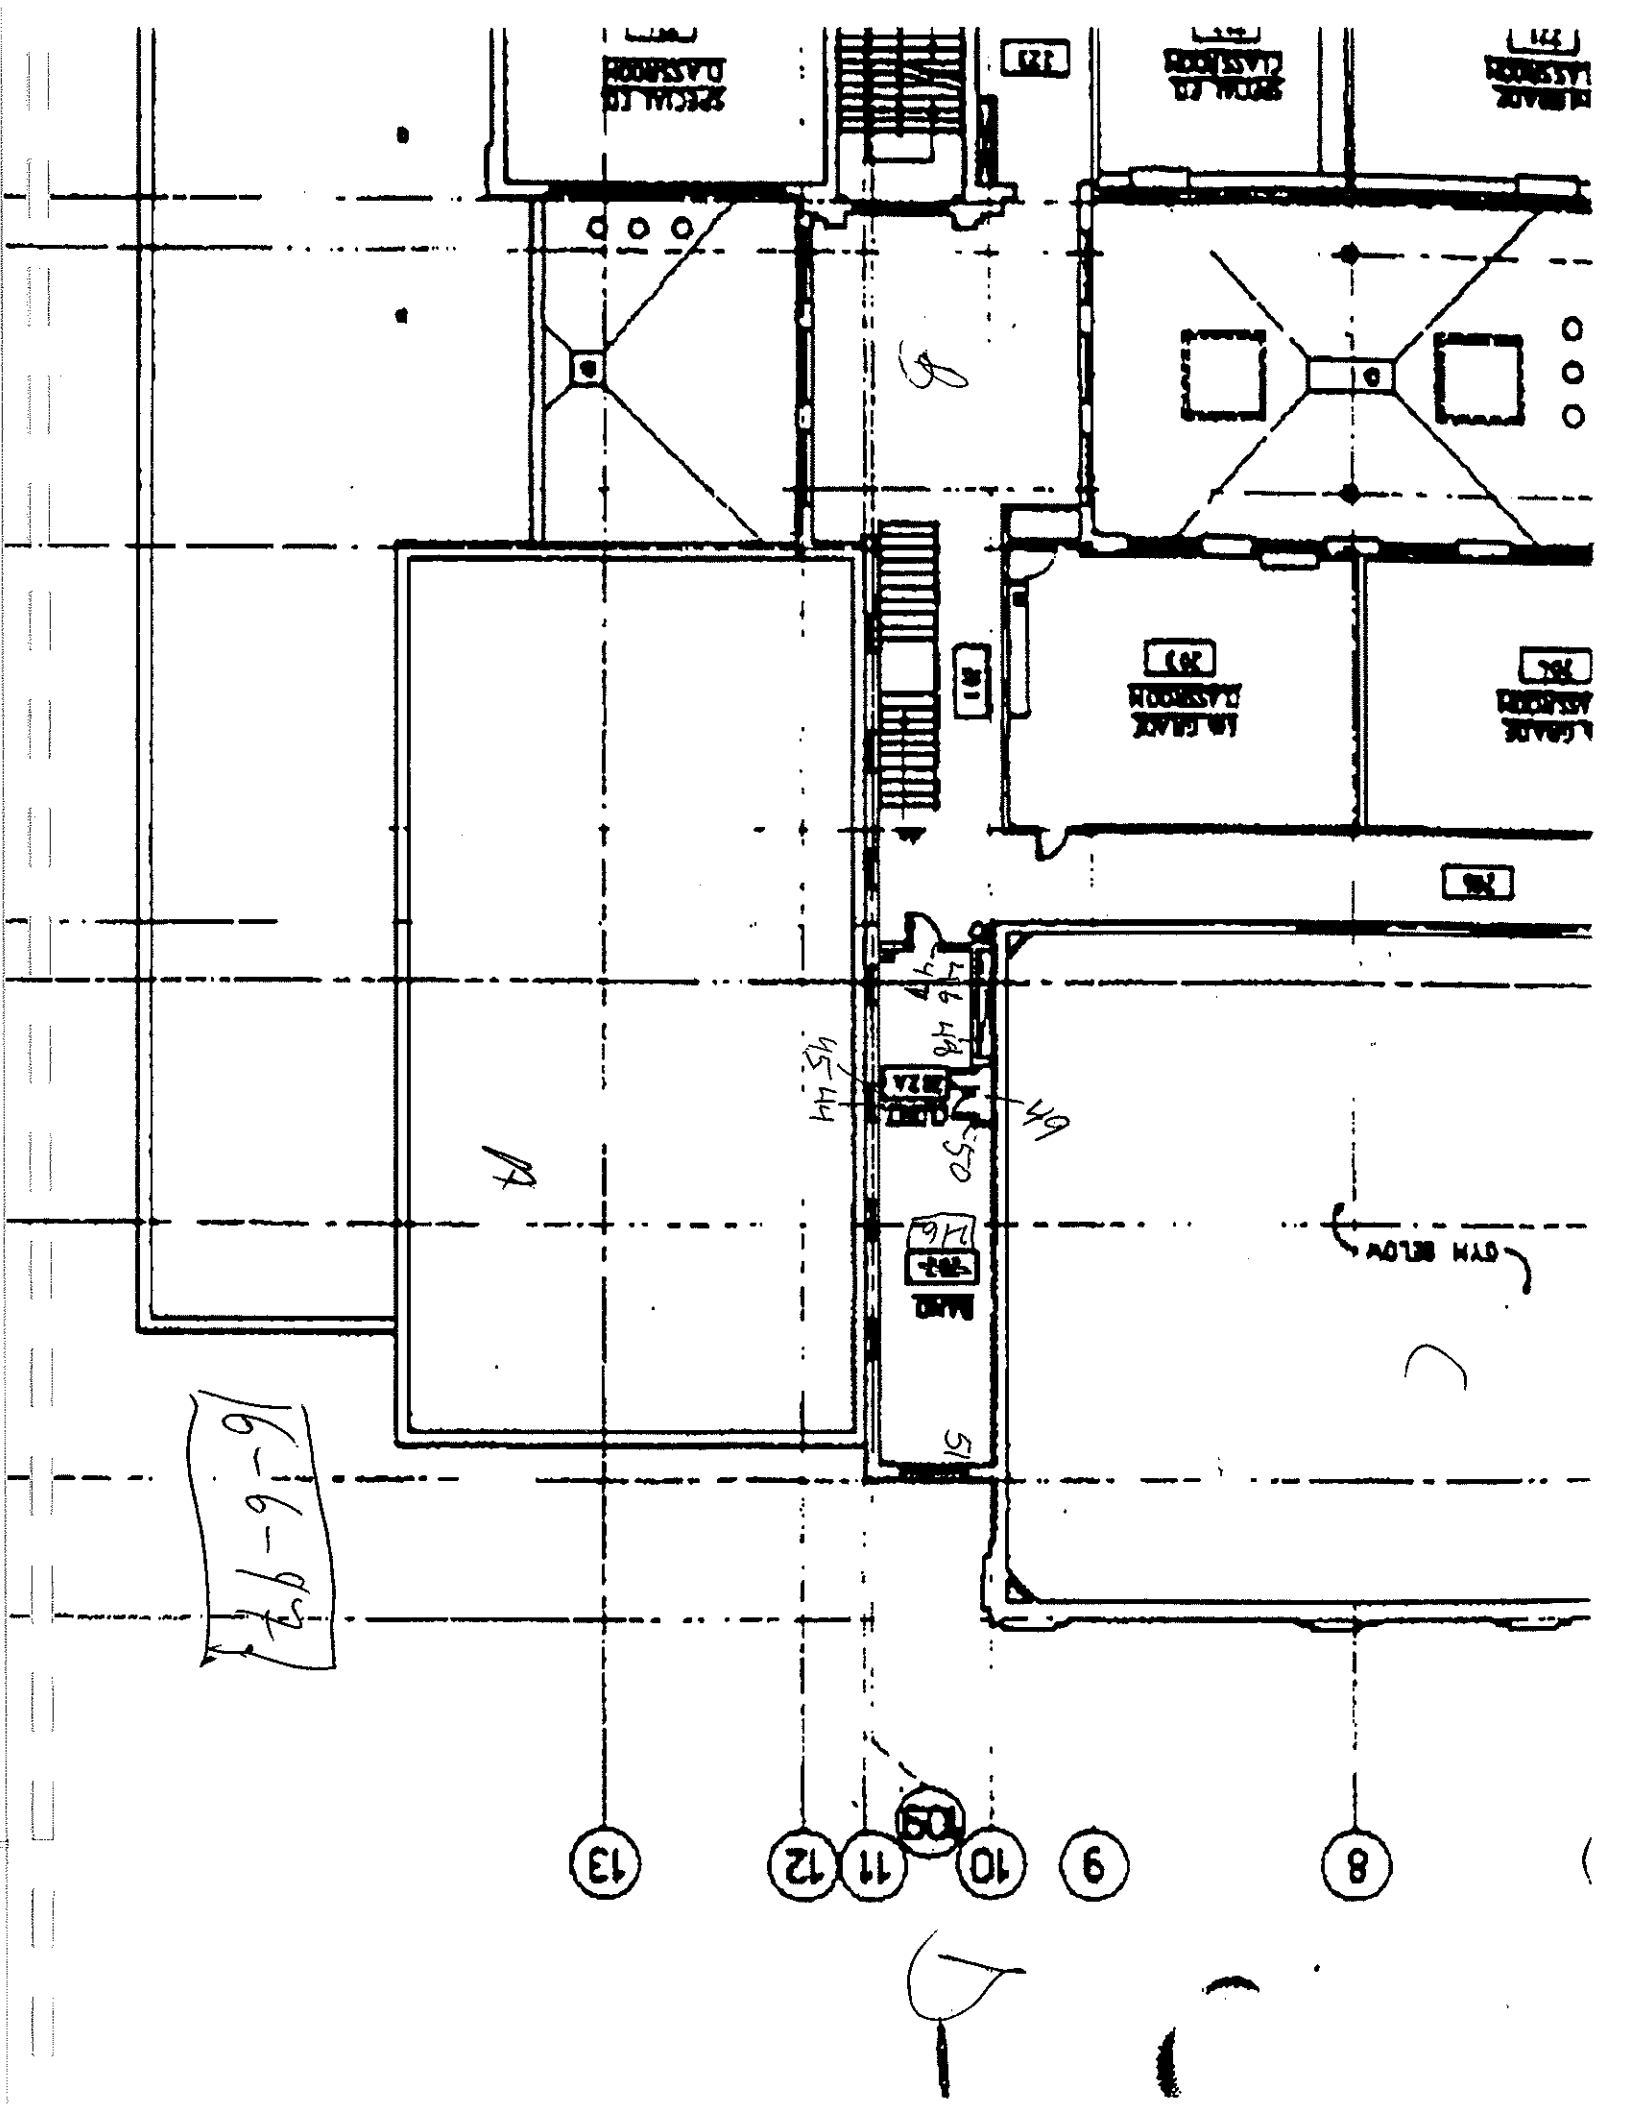

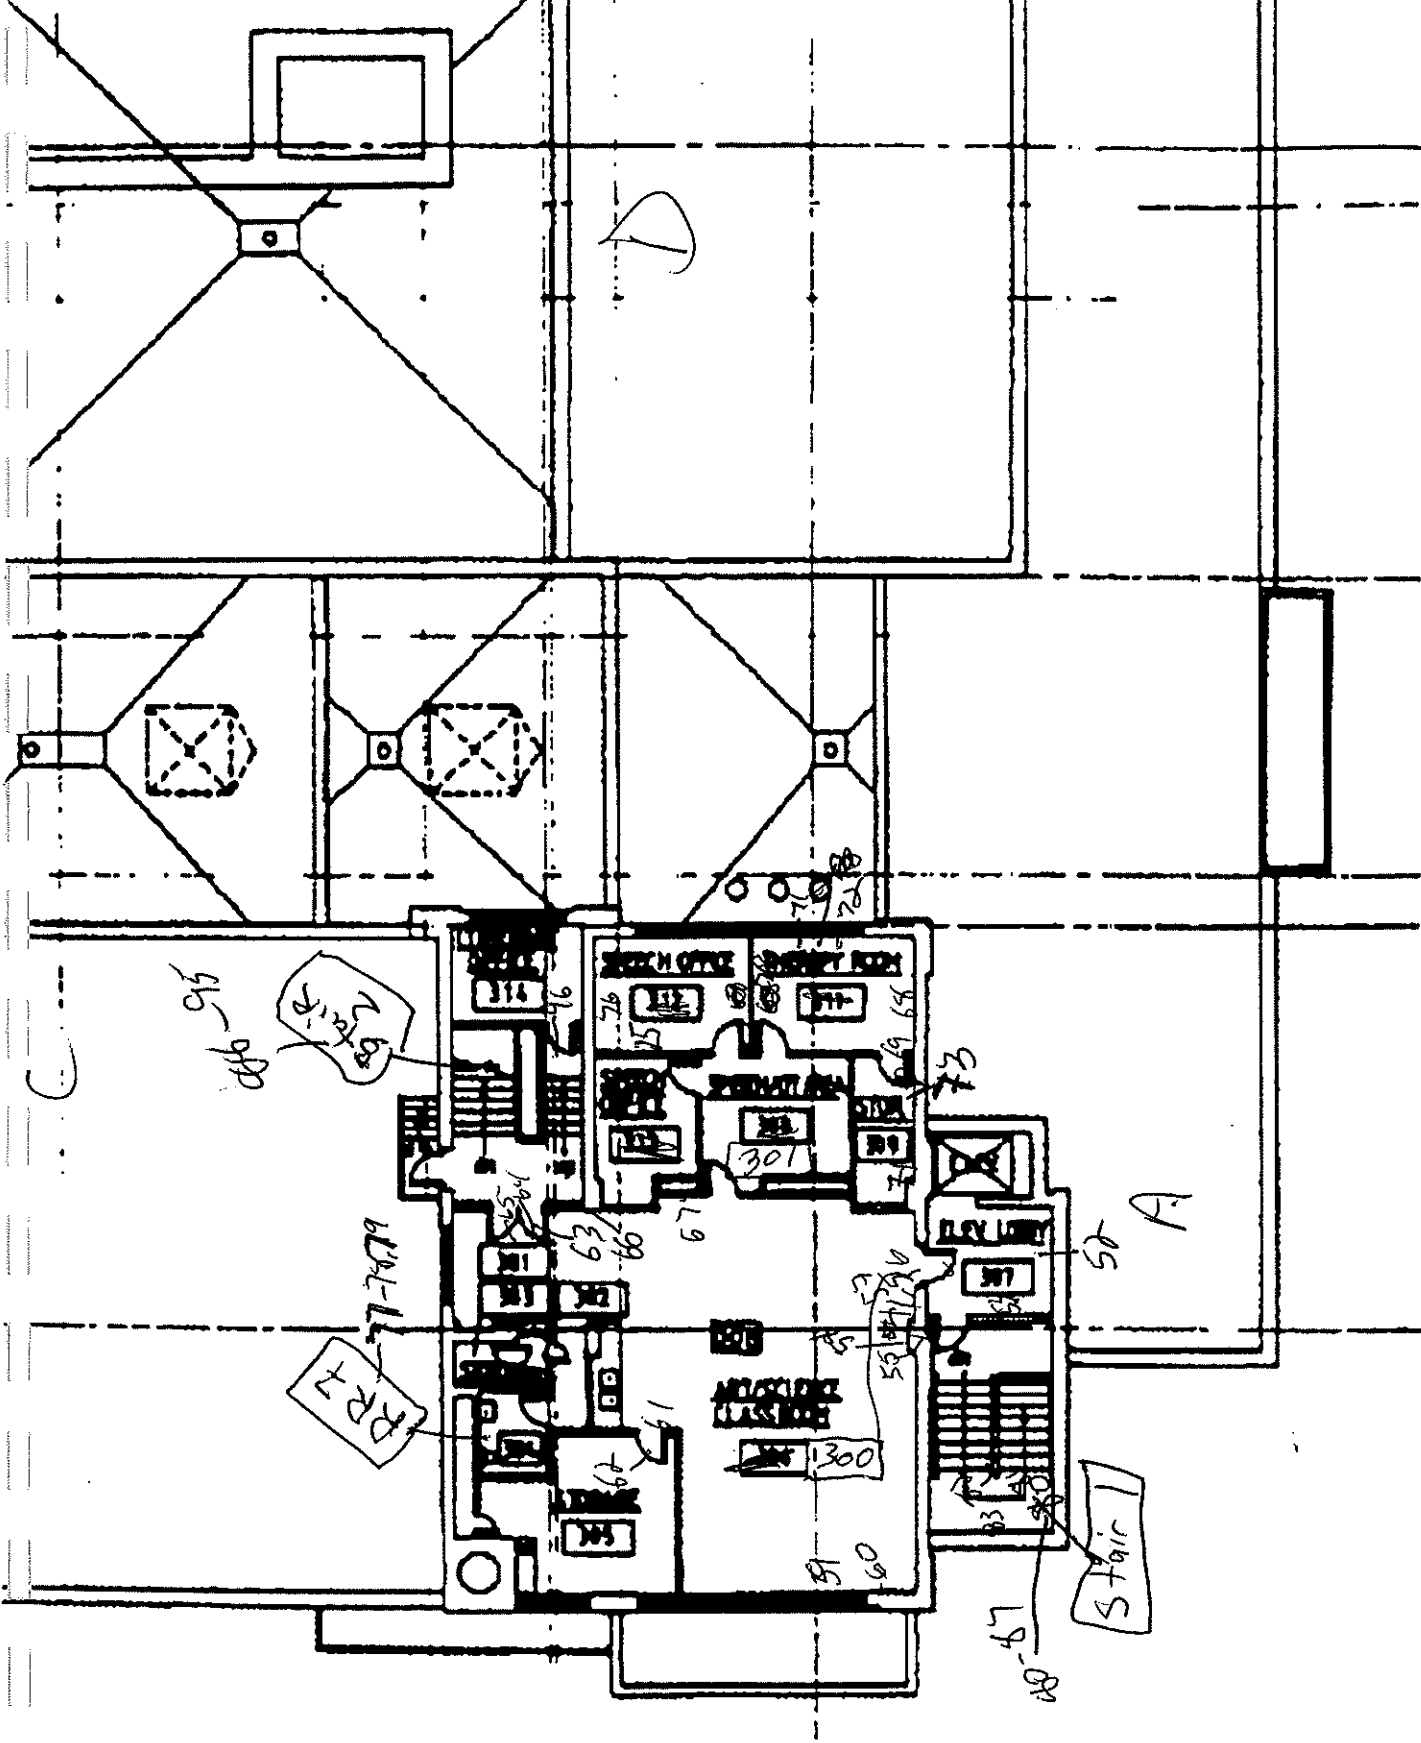

THIRD FLOOR & ROOF



Saint Paul Public Schools
 Eastern Heights Elementary
 Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
1	Eastern Heights Elementary											
2												
3	Site	Sample#	Analysis	Date	Floor	Area	Room#	Structure	Feature	Condition	Substrate	Result
4	1930 Bldg.	6	XRF	6/3/97	0	Boiler Room	0	Wall	Wall	Cracked	Concrte	0.06
5	1930 Bldg.	7	XRF	6/3/97	0	Boiler Room	0	Wall	Wall	Solid	Concrte	0.08
6	1930 Bldg.	8	XRF	6/3/97	0	Boiler Room	0	Wood Bar		Peeling	Wood	0
7	1930 Bldg.	9	XRF	6/3/97	0	Boiler Room	0	Wall	Wall	Solid	Drywall	0
8	1930 Bldg.	10	XRF	6/3/97	0	Boiler Room	0	Wall	Wall	Solid	Drywall	0.04
9	1930 Bldg.	11	XRF	6/3/97	0	Boiler Room	0	Door	Casing	Solid	Wood	0
10	1930 Bldg.	12	XRF	6/3/97	0	Boiler Room	0	Door	Door	Solid	Wood	0.01
11	1930 Bldg.	13	XRF	6/3/97	0	Boiler Room	1	Door	Door	Solid	Wood	0
12	1930 Bldg.	14	XRF	6/3/97	0	Boiler Room	1	Wall	Wall	Peeling	Concrte	0.08
13	1930 Bldg.	15	XRF	6/3/97	0	Boiler Room	1	Wall	Wall	Peeling	Concrte	0.13
14	1930 Bldg.	16	XRF	6/3/97	0	Boiler Room	1	Wall	Wall	Solid	Tile	0.1
15	1930 Bldg.	17	XRF	6/3/97	0	Boiler Room	1	Wall	Wall	Solid	Tile	0.1
16	1930 Bldg.	18	XRF	6/3/97	0	Boiler Room	1	Stairs	Hand rail	Peeling	Metal	5.09
17	1930 Bldg.	19	XRF	6/3/97	0	Boiler Room	1	Door	Door	Peeling	Metal	5.09
18	1930 Bldg.	20	XRF	6/3/97	0	Boiler Room	1	Door	Casing	Peeling	Metal	2.63
19	1930 Bldg.	21	XRF	6/3/97	0	Boiler Room	1	Stairs	Tread	Solid	Concrte	0.06
20	1930 Bldg.	22	XRF	6/3/97	0	Boiler Room	1	Wall	Wall	Solid	Tile	0.1
21	1930 Bldg.	23	XRF	6/3/97	0	Boiler Room	1	Door	Casing	Solid	Metal	0.64
22	1930 Bldg.	24	XRF	6/3/97	0	Boiler Room	1	Door	Door	Solid	Metal	5.09
23	1930 Bldg.	25	XRF	6/3/97	0	Boiler Room	1	Stairs	Hand rail	Solid	Wood	0.01
24	1930 Bldg.	26	XRF	6/3/97	0	Boiler Room	1	Door	Door	Solid	Metal	0.22
25	1930 Bldg.	93	XRF	6/3/97	1	Classroom	109	Wall	Wall	Solid	Drywall	0
26	1930 Bldg.	94	XRF	6/3/97	1	Classroom	109	Wall	Midle Wall	Solid	Concrte	0
27	1930 Bldg.	95	XRF	6/3/97	1	Classroom	109	Door	Casing	Solid	Metal	0
28	1930 Bldg.	96	XRF	6/3/97	1	Classroom	109	Door	Door	Solid	Wood	0
29	1930 Bldg.	97	XRF	6/3/97	1	Classroom	109	Door	Casing	Solid	Metal	0
30	1930 Bldg.	98	XRF	6/3/97	1	Classroom	109	Wall	Midle Wall	Solid	Concrte	0
31	1930 Bldg.	99	XRF	6/3/97	1	Classroom	109	Wall	Midle Wall	Solid	Drywall	0
32	1930 Bldg.	100	XRF	6/3/97	1	Classroom	109		Radiator	Solid	Metal	0
33	1930 Bldg.	101	XRF	6/3/97	1	Classroom	109		Radlator	Solid	Metal	0
34	1930 Bldg.	102	XRF	6/3/97	1	Classroom	110	Wall	Midle Wall	Solid	Drywall	0.35
35	1930 Bldg.	103	XRF	6/3/97	1	Classroom	110	Door	Casing	Solid	Metal	0
36	1930 Bldg.	104	XRF	6/3/97	1	Classroom	110	Door	Door	Solid	Wood	0
37	1930 Bldg.	105	XRF	6/3/97	1	Classroom	110	Wall	Midle Wall	Solid	Drywall	0
38	1930 Bldg.	106	XRF	6/3/97	1	Classroom	110	Wall	Midle Wall	Solid	Concrte	0
39	1930 Bldg.	107	XRF	6/3/97	1	Classroom	110		Radiator	Solid	Metal	0
40	1930 Bldg.	108	XRF	6/3/97	1	Classroom	110		Radiator	Solid	Metal	0
41	1930 Bldg.	320	XRF	6/5/97	2	Classroom	209	Wall	Midle Wall	Solid	Plaster	0
42	1930 Bldg.	321	XRF	6/5/97	2	Classroom	209	Wall	Midle Wall	Solid	Concrte	0
43	1930 Bldg.	322	XRF	6/5/97	2	Classroom	209	Door	Casing	Solid	Metal	0
44	1930 Bldg.	323	XRF	6/5/97	2	Classroom	209	Door	Door	Solid	Wood	0
45	1930 Bldg.	324	XRF	6/5/97	2	Classroom	210	Wall	Midle Wall	Solid	Concrte	0.01
46	1930 Bldg.	325	XRF	6/5/97	2	Classroom	210	Door	Casing	Solid	Metal	0.03
47	1930 Bldg.	326	XRF	6/5/97	2	Classroom	210	Door	Door	Solid	Wood	0
48	1930 Bldg.	327	XRF	6/5/97	2	Classroom	210	Wall	Midle Wall	Solid	Concrte	0.08
49	1930 Bldg.	328	XRF	6/5/97	2	Classroom	210		Radiator	Solid	Metal	0
50	1930 Bldg.	329	XRF	6/5/97	2	Classroom	210		Radiator	Solid	Metal	0
51	1930 Bldg.	330	XRF	6/5/97	2	Classroom	210	Wall	Midle Wall	Solid	Plaster	0
52	1930 Bldg.	331	XRF	6/5/97	2	Classroom	211	Wall	Midle Wall	Solid	Plaster	0
53	1930 Bldg.	332	XRF	6/5/97	2	Classroom	211	Door	Casing	Solid	Metal	0
54	1930 Bldg.	333	XRF	6/5/97	2	Classroom	211	Door	Door	Solid	Wood	0
55	1930 Bldg.	334	XRF	6/5/97	2	Classroom	211	Wall	Midle Wall	Solid	Plaster	0.29
56	1930 Bldg.	335	XRF	6/5/97	2	Classroom	211	Wall	Midle Wall	Solid	Concrte	0.02
57	1930 Bldg.	336	XRF	6/5/97	2	Classroom	211		Radiator	Solid	Metal	0.02
58	1930 Bldg.	337	XRF	6/5/97	2	Classroom	211		Radiator	Solid	Metal	0
59	1930 Bldg.	6	XRF	6/6/97	2	Classroom	212	Wall	Midle Wall	Solid	Concrte	0
60	1930 Bldg.	7	XRF	6/6/97	2	Classroom	212	Wall	Midle Wall	Solid	Concrte	0
61	1930 Bldg.	8	XRF	6/6/97	2	Classroom	212	Wall	Midle Wall	Solid	Concrte	0
62	1930 Bldg.	9	XRF	6/6/97	2	Classroom	212	Wall	Midle Wall	Solid	Drywall	0
63	1930 Bldg.	10	XRF	6/6/97	2	Classroom	212	Door	Casing	Solid	Metal	0
64	1930 Bldg.	11	XRF	6/6/97	2	Classroom	212	Door	Door	Solid	Wood	0

Saint Paul Public Schools
Eastern Heights Elementary
Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
65	1930 Bldg.	12	XRF	6/6/97	2	Classroom	212		Radiator	Solid	Metal	0
66	1930 Bldg.	13	XRF	6/6/97	2	Classroom	212		Radiator	Solid	Metal	0
67	1930 Bldg.	51	XRF	6/6/97	2	Classroom	216		Radiator	Solid	Metal	0
68	1930 Bldg.	52	XRF	6/6/97	3	Classroom	300	Wall	Midle Wall	Solid	Concrte	0
69	1930 Bldg.	53	XRF	6/6/97	3	Classroom	300	Wall	Midle Wall	Solid	Drywall	0
70	1930 Bldg.	54	XRF	6/6/97	3	Classroom	300	Door	Door	Solid	Wood	0
71	1930 Bldg.	55	XRF	6/6/97	3	Classroom	300	Door	Casing	Solid	Metal	0
72	1930 Bldg.	56	XRF	6/6/97	3	Classroom	300	Wall	Midle Wall	Solid	Drywall	0
73	1930 Bldg.	57	XRF	6/6/97	3	Classroom	300	Wall	Wall	Solid	Plaster	0
74	1930 Bldg.	58	XRF	6/6/97	3	Classroom	300		Radiator	Solid	Metal	0.25
75	1930 Bldg.	59	XRF	6/6/97	3	Classroom	300	Window	Casing	Solid	Wood	0.09
76	1930 Bldg.	60	XRF	6/6/97	3	Classroom	300		Radiator	Solid	Metal	0.03
77	1930 Bldg.	61	XRF	6/6/97	3	Classroom	300	Door	Casing	Solid	Wood	0
78	1930 Bldg.	62	XRF	6/6/97	3	Classroom	300	Door	Door	Solid	Wood	0
79	1930 Bldg.	63	XRF	6/6/97	3	Classroom	300	Door	Casing	Solid	Wood	0.13
80	1930 Bldg.	64	XRF	6/6/97	3	Classroom	300	Wall	Panel	Solid	Metal	0
81	1930 Bldg.	65	XRF	6/6/97	3	Classroom	300	Door	Door	Solid	Metal	0
82	1930 Bldg.	66	XRF	6/6/97	3	Classroom	300	Wall	Chair rail	Solid	Wood	0
83	1930 Bldg.	67	XRF	6/6/97	3	Classroom	300	Bookcase	Shelf	Solid	Wood	0
84	1930 Bldg.	68	XRF	6/6/97	3	Classroom	301	Wall	Midle Wall	Cracked	Plaster	0.02
85	1930 Bldg.	69	XRF	6/6/97	3	Classroom	301	Door	Casing	Solid	Wood	0
86	1930 Bldg.	70	XRF	6/6/97	3	Classroom	301	Wall	Wall	Solid	Plaster	0
87	1930 Bldg.	71	XRF	6/6/97	3	Classroom	301		Radiator	Solid	Metal	0.08
88	1930 Bldg.	72	XRF	6/6/97	3	Classroom	301	Window	Casing	Solid	Wood	0.05
89	1930 Bldg.	73	XRF	6/6/97	3	Classroom	301	Chalkboar	Rail	Solid	Wood	0.07
90	1930 Bldg.	74	XRF	6/6/97	3	Classroom	301	Wall	Chair rail	Solid	Wood	0.05
91	1930 Bldg.	75	XRF	6/6/97	3	Classroom	301	Bookcase	Shelf	Solid	Wood	0
92	1930 Bldg.	76	XRF	6/6/97	3	Classroom	301	Wall	Wall	Solid	Plaster	0.06
93	1930 Bldg.	27	XRF	6/3/97	1	Hall	1	Wall	Wall	Solid	Plaster	2.4
94	1930 Bldg.	28	XRF	6/3/97	1	Hall	1	Wall	Chair rail	Cracked	Wood	0.04
95	1930 Bldg.	29	XRF	6/3/97	1	Hall	1	Door	Casing	Solid	Metal	0
96	1930 Bldg.	30	XRF	6/3/97	1	Hall	1	Door	Door	Solid	Wood	0.04
97	1930 Bldg.	19	XRF	6/7/97	1	Hall	2		Locker	Solid	Metal	0
98	1930 Bldg.	20	XRF	6/7/97	1	Hall	2		Radiator	Solid	Metal	0.03
99	1930 Bldg.	21	XRF	6/7/97	1	Hall	2	Wall	Midle Wall	Solid	Concrte	0
100	1930 Bldg.	22	XRF	6/7/97	1	Hall	2	Door	Door	Solid	Metal	0.05
101	1930 Bldg.	23	XRF	6/7/97	1	Hall	2	Wall	Midle Wall	Solid	Concrte	0
102	1930 Bldg.	186	XRF	6/3/97	1	Main	1	Door	Door	Solid	Wood	0
103	1930 Bldg.	187	XRF	6/3/97	1	Main	1	Door	Casing	Solid	Metal	0
104	1930 Bldg.	188	XRF	6/3/97	1	Main	1	Wall	Midle Wall	Solid	Drywall	0
105	1930 Bldg.	189	XRF	6/3/97	1	Main	1	Wall	Midle Wall	Solid	Drywall	0
106	1930 Bldg.	190	XRF	6/3/97	1	Main	1	Wall	Midle Wall	Solid	Drywall	0
107	1930 Bldg.	191	XRF	6/3/97	1	Main	1	Column	Midle Wall	Solid	Concrte	0.01
108	1930 Bldg.	192	XRF	6/3/97	1	Main	1	Door	Casing	Solid	Metal	0
109	1930 Bldg.	193	XRF	6/3/97	1	Main	1		Radiator	Solid	Metal	0
110	1930 Bldg.	194	XRF	6/3/97	1	Main	1	Door	Door	Solid	Metal	0
111	1930 Bldg.	206	XRF	6/3/97	1	Main	2	Window	Casing	Solid	Wood	0.01
112	1930 Bldg.	207	XRF	6/3/97	1	Main	2	Wall	Wall	Solid	Plaster	0
113	1930 Bldg.	208	XRF	6/3/97	1	Main	2		Radiator	Solid	Metal	0
114	1930 Bldg.	209	XRF	6/3/97	1	Main	2	Wall	Midle Wall	Solid	Drywall	0.02
115	1930 Bldg.	210	XRF	6/3/97	1	Main	2	Door	Casing	Solid	Metal	0
116	1930 Bldg.	211	XRF	6/3/97	1	Main	2	Door	Door	Solid	Wood	0
117	1930 Bldg.	201	XRF	6/3/97	1	Main	3	Wall	Midle Wall	Solid	Drywall	0
118	1930 Bldg.	202	XRF	6/3/97	1	Main	3		Radiator	Solid	Metal	0
119	1930 Bldg.	203	XRF	6/3/97	1	Main	3	Wall	Midle Wall	Solid	Drywall	0
120	1930 Bldg.	204	XRF	6/3/97	1	Main	3	Door	Casing	Solid	Metal	0
121	1930 Bldg.	205	XRF	6/3/97	1	Main	3	Door	Door	Solid	Wood	0
122	1930 Bldg.	195	XRF	6/3/97	1	Main	4	Wall	Wall	Solid	Concrte	0
123	1930 Bldg.	196	XRF	6/3/97	1	Main	4		Radiator	Solid	Metal	0
124	1930 Bldg.	197	XRF	6/3/97	1	Main	4	Door	Casing	Solid	Wood	0.02
125	1930 Bldg.	198	XRF	6/3/97	1	Main	4	Door	Door	Solid	Wood	0.03
126	1930 Bldg.	199	XRF	6/3/97	1	Main	4	Wall	Midle Wall	Solid	Drywall	0
127	1930 Bldg.	200	XRF	6/3/97	1	Main	4	Door	Casing	Solid	Metal	0.01
128	1930 Bldg.	212	XRF	6/3/97	1	Main	5	Door	Casing	Solid	Metal	0

Saint Paul Public Schools
 Eastern Heights Elementary
 Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
129	1930 Bldg.	213	XRF	6/3/97	1	Main	5	Door	Casing	Solid	Metal	0
130	1930 Bldg.	214	XRF	6/3/97	1	Main	5	Door	Door	Solid	Wood	0
131	1930 Bldg.	215	XRF	6/3/97	1	Main	5	Wall	Middle Wall	Solid	Concrte	0
132	1930 Bldg.	216	XRF	6/3/97	1	Main	5	Wall	Middle Wall	Solid	Drywall	0
133	1930 Bldg.	217	XRF	6/3/97	1	Main	5	Window	Casing	Solid	Metal	0
134	1930 Bldg.	98	XRF	6/6/97	1	Outside	1	Floor		Cracked	Concrte	0.13
135	1930 Bldg.	99	XRF	6/6/97	1	Outside	1	Floor		Cracked	Concrte	0.01
136	1930 Bldg.	100	XRF	6/6/97	1	Outside	1	Unlisted		Solid	Metal	0.2
137	1930 Bldg.	105	XRF	6/6/97	1	Outside	1	Flag Pole		Peeling	Metal	2.56
138	1930 Bldg.	106	XRF	6/6/97	1	Outside	1	Flag Pole		Solid	Metal	0
139	1930 Bldg.	107	XRF	6/6/97	1	Outside	1	Wall	Wall Rgstr	Solid		0.23
140	1930 Bldg.	108	XRF	6/6/97	1	Outside	1	Door	Door	Solid	Metal	0.39
141	1930 Bldg.	109	XRF	6/6/97	1	Outside	1	Door	Door	Solid	Wood	1.57
142	1930 Bldg.	110	XRF	6/6/97	1	Outside	1	Door	Casing	Solid	Wood	0.66
143	1930 Bldg.	120	XRF	6/3/97	1	Restroom	1	Wall	Bthrm Still	Solid	Metal	0.08
144	1930 Bldg.	121	XRF	6/3/97	1	Restroom	1	Wall	Middle Wall	Solid	Concrte	0.02
145	1930 Bldg.	122	XRF	6/3/97	1	Restroom	1	Door	Casing	Solid	Metal	0
146	1930 Bldg.	123	XRF	6/3/97	1	Restroom	1	Door	Door	Solid	Wood	0
147	1930 Bldg.	116	XRF	6/3/97	1	Restroom	2	Door	Stall Door	Solid	Metal	0.09
148	1930 Bldg.	117	XRF	6/3/97	1	Restroom	2	Wall	Bthrm Still	Solid	Metal	0.08
149	1930 Bldg.	118	XRF	6/3/97	1	Restroom	2	Door	Casing	Solid	Metal	0
150	1930 Bldg.	119	XRF	6/3/97	1	Restroom	2	Door	Door	Solid	Wood	0
151	1930 Bldg.	14	XRF	6/6/97	2	Restroom	5	Wall	Middle Wall	Solid	Concrte	0
152	1930 Bldg.	15	XRF	6/6/97	2	Restroom	5	Door	Door	Solid	Wood	0
153	1930 Bldg.	16	XRF	6/6/97	2	Restroom	5	Door	Casing	Solid	Metal	0
154	1930 Bldg.	17	XRF	6/6/97	2	Restroom	5	Wall	Bthrm Still	Solid	Metal	0.02
155	1930 Bldg.	18	XRF	6/6/97	2	Restroom	6	Wall	Middle Wall	Solid	Concrte	0
156	1930 Bldg.	19	XRF	6/6/97	2	Restroom	6	Door	Casing	Solid	Metal	0
157	1930 Bldg.	20	XRF	6/6/97	2	Restroom	6	Door	Stall Door	Solid	Metal	0.07
158	1930 Bldg.	21	XRF	6/6/97	2	Restroom	6	Door	Stall Door	Solid	Metal	0.09
159	1930 Bldg.	77	XRF	6/6/97	3	Restroom	7	Door	Casing	Solid	Wood	0
160	1930 Bldg.	78	XRF	6/6/97	3	Restroom	7	Door	Door	Solid	Wood	0
161	1930 Bldg.	79	XRF	6/6/97	3	Restroom	7	Wall	Middle Wall	Solid	Plaster	0.08
162	1930 Bldg.	6	XRF	6/7/97	1	Stairwell	4	Door	Door	Solid	Wood	0
163	1930 Bldg.	7	XRF	6/7/97	1	Stairwell	4	Door	Casing	Solid	Metal	0.02
164	1930 Bldg.	8	XRF	6/7/97	1	Stairwell	4	Door	Casing	Solid	Metal	0.2
165	1930 Bldg.	9	XRF	6/7/97	1	Stairwell	4		Radiator	Solid	Metal	0
166	1930 Bldg.	10	XRF	6/7/97	1	Stairwell	4	Door	Door	Solid	Metal	0
167	1930 Bldg.	11	XRF	6/7/97	1	Stairwell	4	Door	Casing	Solid	Wood	0
168	1930 Bldg.	12	XRF	6/7/97	1	Stairwell	4	Stairs	Hand rail	Solid	Wood	0
169	1930 Bldg.	13	XRF	6/7/97	1	Stairwell	4	Wall	Middle Wall	Solid	Concrte	0.02
170	1952 Bldg.	157	XRF	6/3/97	1	Cafeteria	1	Wall	Wall	Solid	Concrte	0
171	1952 Bldg.	158	XRF	6/3/97	1	Cafeteria	1	Door	Door	Solid	Wood	0
172	1952 Bldg.	159	XRF	6/3/97	1	Cafeteria	1	Door	Casing	Solid	Metal	0
173	1952 Bldg.	160	XRF	6/3/97	1	Cafeteria	1	Wall	Wall Rgstr	Solid	Metal	0
174	1952 Bldg.	161	XRF	6/3/97	1	Cafeteria	1	Door	Casing	Solid	Metal	0
175	1952 Bldg.	162	XRF	6/3/97	1	Cafeteria	1	Door	Casing	Solid	Wood	0.07
176	1952 Bldg.	163	XRF	6/3/97	1	Cafeteria	1	Window	Casing	Solid	Wood	0
177	1952 Bldg.	164	XRF	6/3/97	1	Cafeteria	1	Cabinet	Door	Solid	Wood	0.01
178	1952 Bldg.	165	XRF	6/3/97	1	Cafeteria	1	Floor		Cracked	Wood	0
179	1952 Bldg.	166	XRF	6/3/97	1	Cafeteria	1	Wall	Middle Wall	Solid	Concrte	0.01
180	1952 Bldg.	53	XRF	6/3/97	1	Classroom	102	Wall	Middle Wall	Solid	Plaster	0
181	1952 Bldg.	54	XRF	6/3/97	1	Classroom	102	Wall	Middle Wall	Solid	Concrte	0.04
182	1952 Bldg.	55	XRF	6/3/97	1	Classroom	102		Radiator	Solid	Metal	0.07
183	1952 Bldg.	56	XRF	6/3/97	1	Classroom	102	Window	Casing	Solid	Wood	0.01
184	1952 Bldg.	57	XRF	6/3/97	1	Classroom	102	Wall	Wall	Solid	Concrte	0.01
185	1952 Bldg.	58	XRF	6/3/97	1	Classroom	102	Chalkboard	Rail	Solid	Wood	0
186	1952 Bldg.	59	XRF	6/3/97	1	Classroom	102	Wall	Middle Wall	Solid	Concrte	0.02
187	1952 Bldg.	60	XRF	6/3/97	1	Classroom	102	Cabinet	Door	Solid	Wood	0.01
188	1952 Bldg.	61	XRF	6/3/97	1	Classroom	102	Door	Casing	Solid	Wood	0.02
189	1952 Bldg.	62	XRF	6/3/97	1	Classroom	102	Door	Door	Solid	Wood	0.01
190	1952 Bldg.	63	XRF	6/3/97	1	Classroom	103	Door	Casing	Solid	Metal	0.01
191	1952 Bldg.	64	XRF	6/3/97	1	Classroom	103	Door	Door	Solid	Wood	0
192	1952 Bldg.	65	XRF	6/3/97	1	Classroom	103	Wall	Middle Wall	Solid	Plaster	0

Saint Paul Public Schools
 Eastern Heights Elementary
 Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
193	1952 Bldg.	66	XRF	6/3/97	1	Classroom	103	Wall	Midle Wall	Solid	Drywall	0
194	1952 Bldg.	67	XRF	6/3/97	1	Classroom	103	Door	Casing	Solid	Wood	0.02
195	1952 Bldg.	68	XRF	6/3/97	1	Classroom	103	Wall	Midle Wall	Solid	Concrte	0
196	1952 Bldg.	69	XRF	6/3/97	1	Classroom	103	Chalkboar	Rail	Solid	Wood	0
197	1952 Bldg.	70	XRF	6/3/97	1	Classroom	103	Wall	Midle Wall	Solid	Concrte	0
198	1952 Bldg.	71	XRF	6/3/97	1	Classroom	103		Radiator	Solid	Metal	0.06
199	1952 Bldg.	72	XRF	6/3/97	1	Classroom	103	Wall	Midle Wall	Solid	Concrte	0.04
200	1952 Bldg.	73	XRF	6/3/97	1	Classroom	103	Window	Casing	Solid	Wood	0
201	1952 Bldg.	44	XRF	6/3/97	1	Classroom	104	Wall	Wall	Solid	Concrte	0.01
202	1952 Bldg.	45	XRF	6/3/97	1	Classroom	104	Cabinet	Door	Solid	Wood	0
203	1952 Bldg.	46	XRF	6/3/97	1	Classroom	104	Wall	Midle Wall	Solid	Concrte	0.01
204	1952 Bldg.	47	XRF	6/3/97	1	Classroom	104		Radiator	Solid	Metal	0.06
205	1952 Bldg.	48	XRF	6/3/97	1	Classroom	104	Window	Casing	Solid	Wood	0
206	1952 Bldg.	49	XRF	6/3/97	1	Classroom	104	Wall	Wall	Solid	Concrte	0.03
207	1952 Bldg.	50	XRF	6/3/97	1	Classroom	104	Chalkboar	Rail	Solid	Wood	0
208	1952 Bldg.	51	XRF	6/3/97	1	Classroom	104	Door	Casing	Solid	Wood	0.01
209	1952 Bldg.	52	XRF	6/3/97	1	Classroom	104	Door	Door	Solid	Wood	0.02
210	1952 Bldg.	132	XRF	6/3/97	1	Classroom	111	Wall	Midle Wall	Solid	Drywall	0.3
211	1952 Bldg.	133	XRF	6/3/97	1	Classroom	111		Radiator	Solid	Metal	0
212	1952 Bldg.	134	XRF	6/3/97	1	Classroom	111	Wall	Midle Wall	Solid	Concrte	0
213	1952 Bldg.	135	XRF	6/3/97	1	Classroom	111	Wall	Midle Wall	Solid	Concrte	0
214	1952 Bldg.	136	XRF	6/3/97	1	Classroom	111		Radiator	Solid	Metal	0
215	1952 Bldg.	137	XRF	6/3/97	1	Classroom	111	Wall	Midle Wall	Solid	Drywall	0
216	1952 Bldg.	138	XRF	6/3/97	1	Classroom	111	Door	Casing	Solid	Metal	0
217	1952 Bldg.	139	XRF	6/3/97	1	Classroom	111	Door	Door	Solid	Wood	0
218	1952 Bldg.	109	XRF	6/3/97	1	Classroom	112	Wall	Midle Wall	Solid	Plaster	0
219	1952 Bldg.	110	XRF	6/3/97	1	Classroom	112	Door	Door	Solid	Wood	0
220	1952 Bldg.	111	XRF	6/3/97	1	Classroom	112	Door	Casing	Solid	Metal	0
221	1952 Bldg.	112	XRF	6/3/97	1	Classroom	112	Wall	Midle Wall	Solid	Concrte	0.01
222	1952 Bldg.	113	XRF	6/3/97	1	Classroom	112		Radiator	Solid	Metal	0
223	1952 Bldg.	114	XRF	6/3/97	1	Classroom	112		Radiator	Solid	Metal	0
224	1952 Bldg.	279	XRF	6/5/97	2	Classroom	200	Wall	Wall	Solid	Plaster	0.31
225	1952 Bldg.	280	XRF	6/5/97	2	Classroom	200	Chalkboar	Rail	Solid	Wood	0.02
226	1952 Bldg.	281	XRF	6/5/97	2	Classroom	200	Window	Casing	Solid	Wood	0.11
227	1952 Bldg.	282	XRF	6/5/97	2	Classroom	200		Radiator	Solid	Metal	0.66
228	1952 Bldg.	283	XRF	6/5/97	2	Classroom	200	Cabinet	Door	Solid	Wood	0
229	1952 Bldg.	284	XRF	6/5/97	2	Classroom	200	Wall	Midle Wall	Solid	Plaster	4.05
230	1952 Bldg.	285	XRF	6/5/97	2	Classroom	200	Door	Casing	Solid	Wood	0.04
231	1952 Bldg.	286	XRF	6/5/97	2	Classroom	200	Door	Door	Solid	Wood	0.02
232	1952 Bldg.	287	XRF	6/5/97	2	Classroom	200	Wall	Midle Wall	Solid	Plaster	0.31
233	1952 Bldg.	288	XRF	6/5/97	2	Classroom	201	Wall	Wall	Solid	Plaster	0.06
234	1952 Bldg.	289	XRF	6/5/97	2	Classroom	201	Chalkboar	Rail	Solid	Wood	0.05
235	1952 Bldg.	290	XRF	6/5/97	2	Classroom	201	Wall	Midle Wall	Solid	Plaster	1.98
236	1952 Bldg.	291	XRF	6/5/97	2	Classroom	201	Door	Casing	Solid	Wood	0.01
237	1952 Bldg.	292	XRF	6/5/97	2	Classroom	201	Door	Door	Solid	Wood	0.02
238	1952 Bldg.	293	XRF	6/5/97	2	Classroom	201		Radiator	Solid	Metal	0.51
239	1952 Bldg.	294	XRF	6/5/97	2	Classroom	201	Window	Casing	Solid	Wood	0.08
240	1952 Bldg.	259	XRF	6/5/97	2	Classroom	202	Wall	Wall	Solid	Concrte	0.03
241	1952 Bldg.	260	XRF	6/5/97	2	Classroom	202	Wall	Wall	Solid	Concrte	0
242	1952 Bldg.	261	XRF	6/5/97	2	Classroom	202	Chalkboar	Rail	Solid	Wood	0.01
243	1952 Bldg.	262	XRF	6/5/97	2	Classroom	202	Window	Stool	Solid	Wood	0.01
244	1952 Bldg.	263	XRF	6/5/97	2	Classroom	202		Radiator	Solid	Metal	0.06
245	1952 Bldg.	264	XRF	6/5/97	2	Classroom	202	Wall	Midle Wall	Solid	Concrte	0.01
246	1952 Bldg.	265	XRF	6/5/97	2	Classroom	202	Door	Casing	Solid	Wood	0.01
247	1952 Bldg.	266	XRF	6/5/97	2	Classroom	202	Door	Door	Solid	Wood	0.01
248	1952 Bldg.	295	XRF	6/5/97	2	Classroom	203	Wall	Midle Wall	Solid	Plaster	0
249	1952 Bldg.	296	XRF	6/5/97	2	Classroom	203	Door	Casing	Solid	Metal	0
250	1952 Bldg.	297	XRF	6/5/97	2	Classroom	203	Door	Door	Solid	Wood	0
251	1952 Bldg.	298	XRF	6/5/97	2	Classroom	203	Wall	Midle Wall	Solid	Concrte	0.08
252	1952 Bldg.	299	XRF	6/5/97	2	Classroom	203	Chalkboar	Rail	Solid	Wood	0.01
253	1952 Bldg.	300	XRF	6/5/97	2	Classroom	203	Wall	Baseboar	Solid	Wood	0
254	1952 Bldg.	301	XRF	6/5/97	2	Classroom	203	Cabinet	Door	Solid	Wood	0
255	1952 Bldg.	302	XRF	6/5/97	2	Classroom	203	Wall	Midle Wall	Solid	Concrte	0.01
256	1952 Bldg.	303	XRF	6/5/97	2	Classroom	203		Radiator	Solid	Metal	0.06

Saint Paul Public Schools
Eastern Heights Elementary
Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
257	1952 Bldg.	250	XRF	6/5/97	2	Classroom	204	Wall	Wall	Solid	Concrte	0.01
258	1952 Bldg.	251	XRF	6/5/97	2	Classroom	204	Wall	Wall	Solid	Concrte	0
259	1952 Bldg.	252	XRF	6/5/97	2	Classroom	204	Window	Casing	Solid	Wood	0
260	1952 Bldg.	253	XRF	6/5/97	2	Classroom	204	Wall	Midle Wall	Solid	Concrte	0.03
261	1952 Bldg.	254	XRF	6/5/97	2	Classroom	204		Radiator	Solid	Metal	0.04
262	1952 Bldg.	255	XRF	6/5/97	2	Classroom	204	Door	Casing	Solid	Wood	0.01
263	1952 Bldg.	256	XRF	6/5/97	2	Classroom	204	Wall	Midle Wall	Solid	Concrte	0.08
264	1952 Bldg.	257	XRF	6/5/97	2	Classroom	204	Door	Door	Solid	Wood	0.01
265	1952 Bldg.	258	XRF	6/5/97	2	Classroom	204	Chalkboar	Rail	Solid	Wood	0.01
266	1952 Bldg.	304	XRF	6/5/97	2	Classroom	205	Wall	Wall	Solid	Concrte	0.02
267	1952 Bldg.	305	XRF	6/5/97	2	Classroom	205	Chalkboar	Rail	Solid	Wood	0.02
268	1952 Bldg.	306	XRF	6/5/97	2	Classroom	205	Door	Casing	Solid	Wood	0.02
269	1952 Bldg.	307	XRF	6/5/97	2	Classroom	205	Door	Door	Solid	Wood	0.03
270	1952 Bldg.	308	XRF	6/5/97	2	Classroom	205	Wall	Midle Wall	Solid	Concrte	0.02
271	1952 Bldg.	309	XRF	6/5/97	2	Classroom	205	Wall	Wall	Solid	Concrte	0
272	1952 Bldg.	310	XRF	6/5/97	2	Classroom	205	Wall	Midle Wall	Solid	Concrte	0.03
273	1952 Bldg.	311	XRF	6/5/97	2	Classroom	205	Window	Casing	Solid	Wood	0.02
274	1952 Bldg.	312	XRF	6/5/97	2	Classroom	205		Radlator	Solid	Metal	0.04
275	1952 Bldg.	22	XRF	6/6/97	2	Classroom	213	Wall	Midle Wall	Solid	Plaster	0.33
276	1952 Bldg.	23	XRF	6/6/97	2	Classroom	213	Wall	Midle Wall	Solid	Concrte	0
277	1952 Bldg.	24	XRF	6/6/97	2	Classroom	213		Radiator	Solid	Metal	0
278	1952 Bldg.	25	XRF	6/6/97	2	Classroom	213		Radiator	Solid	Metal	0
279	1952 Bldg.	26	XRF	6/6/97	2	Classroom	213		Radiator	Solid	Plaster	0
280	1952 Bldg.	27	XRF	6/6/97	2	Classroom	213	Wall	Midle Wall	Solid	Concrte	0.01
281	1952 Bldg.	28	XRF	6/6/97	2	Classroom	214	Wall	Midle Wall	Solid	Plaster	0
282	1952 Bldg.	29	XRF	6/6/97	2	Classroom	214	Wall	Midle Wall	Solid	Concrte	0
283	1952 Bldg.	30	XRF	6/6/97	2	Classroom	214		Radiator	Solid	Metal	0
284	1952 Bldg.	31	XRF	6/6/97	2	Classroom	214		Radiator	Solid	Metal	0
285	1952 Bldg.	32	XRF	6/6/97	2	Classroom	214	Wall	Midle Wall	Solid	Plaster	0.35
286	1952 Bldg.	33	XRF	6/6/97	2	Classroom	214	Door	Casing	Solid	Metal	0
287	1952 Bldg.	34	XRF	6/6/97	2	Classroom	214	Door	Door	Solid	Wood	0
288	1952 Bldg.	35	XRF	6/6/97	2	Classroom	214	Wall	Midle Wall	Solid	Concrte	0
289	1952 Bldg.	36	XRF	6/6/97	2	Classroom	215	Wall	Midle Wall	Solid	Plaster	0.27
290	1952 Bldg.	37	XRF	6/6/97	2	Classroom	215	Wall	Midle Wall	Solid	Concrte	0
291	1952 Bldg.	38	XRF	6/6/97	2	Classroom	215		Radiator	Solid	Metal	0
292	1952 Bldg.	39	XRF	6/6/97	2	Classroom	215		Radiator	Solid	Metal	0.01
293	1952 Bldg.	40	XRF	6/6/97	2	Classroom	215	Wall	Midle Wall	Solid	Plaster	0
294	1952 Bldg.	41	XRF	6/6/97	2	Classroom	215	Wall	Midle Wall	Solid	Concrte	0
295	1952 Bldg.	42	XRF	6/6/97	2	Classroom	215	Door	Door	Solid	Wood	0
296	1952 Bldg.	43	XRF	6/6/97	2	Classroom	215	Door	Casing	Solid	Metal	0.01
297	1952 Bldg.	44	XRF	6/6/97	2	Classroom	216		Radiator	Solid	Metal	0
298	1952 Bldg.	45	XRF	6/6/97	2	Classroom	216	Window	Stool	Solid	Concrte	0
299	1952 Bldg.	46	XRF	6/6/97	2	Classroom	216	Window	Stool	Solid	Plaster	0
300	1952 Bldg.	47	XRF	6/6/97	2	Classroom	216	Door	Casing	Solid	Metal	0
301	1952 Bldg.	48	XRF	6/6/97	2	Classroom	216	Wall	Midle Wall	Solid	Plaster	0.32
302	1952 Bldg.	49	XRF	6/6/97	2	Classroom	216	Wall	Midle Wall	Solid	Concrte	0
303	1952 Bldg.	50	XRF	6/6/97	2	Classroom	216	Door	Casing	Solid	Metal	0
304	1952 Bldg.	124	XRF	6/3/97	1	Gym	1	Wall	Midle Wall	Solid	Concrte	0
305	1952 Bldg.	125	XRF	6/3/97	1	Gym	1	Wall	Wall Rgstr	Solid	Metal	0
306	1952 Bldg.	126	XRF	6/3/97	1	Gym	1	Door	Casing	Solid	Metal	0
307	1952 Bldg.	127	XRF	6/3/97	1	Gym	1	Door	Door	Solid	Wood	0
308	1952 Bldg.	128	XRF	6/3/97	1	Gym	1	Door	Door	Solid	Metal	0
309	1952 Bldg.	129	XRF	6/3/97	1	Gym	1	Door	Casing	Solid	Metal	0.01
310	1952 Bldg.	130	XRF	6/3/97	1	Gym	1	Floor		Solid	Tile	0
311	1952 Bldg.	131	XRF	6/3/97	1	Gym	1	Floor		Solid	Tile	0
312	1952 Bldg.	14	XRF	6/7/97	1	Hall	2		Radiator	Solid	Metal	0.14
313	1952 Bldg.	15	XRF	6/7/97	1	Hall	2	Window	Casing	Solid	Wood	0.01
314	1952 Bldg.	16	XRF	6/7/97	1	Hall	2	Door	Door	Solid	Wood	0.02
315	1952 Bldg.	17	XRF	6/7/97	1	Hall	2	Door	Casing	Solid	Metal	0.23
316	1952 Bldg.	18	XRF	6/7/97	1	Hall	2		Locker	Solid	Metal	0
317	1952 Bldg.	181	XRF	6/3/97	1	Kitchen	1		Radiator	Solid	Metal	0
318	1952 Bldg.	182	XRF	6/3/97	1	Kitchen	1	Door	Casing	Solid	Metal	0.02
319	1952 Bldg.	183	XRF	6/3/97	1	Kitchen	1	Door	Door	Solid	Wood	0
320	1952 Bldg.	184	XRF	6/3/97	1	Kitchen	1		Locker	Solid	Metal	0

Saint Paul Public Schools
 Eastern Heights Elementary
 Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
321	1952 Bldg.	185	XRF	6/3/97	1	Kitchen	1	Window	Casing	Solid	Wood	0
322	1952 Bldg.	148	XRF	6/3/97	1	Library	1	Door	Casing	Solid	Metal	0
323	1952 Bldg.	149	XRF	6/3/97	1	Library	1	Door	Door	Solid	Wood	0
324	1952 Bldg.	150	XRF	6/3/97	1	Library	1	Wall	Middle Wall	Solid	Drywall	0.3
325	1952 Bldg.	151	XRF	6/3/97	1	Library	1	Wall	Middle Wall	Solid	Concrte	0
326	1952 Bldg.	152	XRF	6/3/97	1	Library	1	Window	Casing	Solid	Metal	0
327	1952 Bldg.	153	XRF	6/3/97	1	Library	1	Wall	Middle Wall	Solid	Drywall	0
328	1952 Bldg.	154	XRF	6/3/97	1	Library	1	Door	Casing	Solid	Metal	0
329	1952 Bldg.	155	XRF	6/3/97	1	Library	1		Radiator	Solid	Metal	0.04
330	1952 Bldg.	156	XRF	6/3/97	1	Library	1	Door	Casing	Solid	Metal	0
331	1952 Bldg.	218	XRF	6/3/97	1	Lounge	1	Wall	Middle Wall	Solid	Plaster	0
332	1952 Bldg.	219	XRF	6/3/97	1	Lounge	1	Window	Casing	Solid	Wood	0.07
333	1952 Bldg.	220	XRF	6/3/97	1	Lounge	1	Wall	Chair rail	Solid	Wood	0.04
334	1952 Bldg.	221	XRF	6/3/97	1	Lounge	1		Radiator	Solid	Metal	0.47
335	1952 Bldg.	222	XRF	6/3/97	1	Lounge	1	Wall	Middle Wall	Solid	Plaster	0.34
336	1952 Bldg.	223	XRF	6/3/97	1	Lounge	1	Wall	Middle Wall	Solid	Concrte	0
337	1952 Bldg.	224	XRF	6/3/97	1	Lounge	1	Door	Casing	Solid	Metal	0
338	1952 Bldg.	225	XRF	6/3/97	1	Lounge	1	Door	Door	Solid	Wood	0
339	1952 Bldg.	167	XRF	6/3/97	1	Other	1	Wall	Middle Wall	Solid	Concrte	0.02
340	1952 Bldg.	168	XRF	6/3/97	1	Other	1	Wall	Middle Wall	Solid	Drywall	0
341	1952 Bldg.	169	XRF	6/3/97	1	Other	1	Wall	Wall	Solid	Wood	0.01
342	1952 Bldg.	170	XRF	6/3/97	1	Other	1	Door	Casing	Solid	Wood	0.02
343	1952 Bldg.	171	XRF	6/3/97	1	Other	1	Door	Door	Solid	Wood	0.01
344	1952 Bldg.	172	XRF	6/3/97	1	Other	1	Wall	Middle Wall	Solid	Concrte	0.02
345	1952 Bldg.	173	XRF	6/3/97	1	Other	1	Stairs	Hand rail	Solid	Metal	0.09
346	1952 Bldg.	174	XRF	6/3/97	1	Other	2	Wall	Middle Wall	Solid	Concrte	0.01
347	1952 Bldg.	175	XRF	6/3/97	1	Other	2	Wall	Middle Wall	Solid	Plaster	0
348	1952 Bldg.	176	XRF	6/3/97	1	Other	2	Door	Casing	Solid	Metal	0
349	1952 Bldg.	177	XRF	6/3/97	1	Other	2	Stairs	Hand rail	Solid	Metal	0.01
350	1952 Bldg.	178	XRF	6/3/97	1	Other	2	Door	Door	Solid	Metal	0
351	1952 Bldg.	179	XRF	6/3/97	1	Other	2	Door	Door	Solid	Metal	0
352	1952 Bldg.	180	XRF	6/3/97	1	Other	2	Door	Casing	Solid	Metal	0.02
353	1952 Bldg.	101	XRF	6/6/97	1	Outside	1	Stairs	Hand rail	Solid	Metal	0
354	1952 Bldg.	102	XRF	6/6/97	1	Outside	1	Door	Casing	Solid	Metal	0
355	1952 Bldg.	103	XRF	6/6/97	1	Outside	1	Door	Casing	Solid	Metal	0.18
356	1952 Bldg.	104	XRF	6/6/97	1	Outside	1	Window	Casing	Solid	Metal	0
357	1952 Bldg.	115	XRF	6/3/97	1	Restroom	2	Wall	Middle Wall	Solid	Concrte	0
358	1952 Bldg.	267	XRF	6/5/97	2	Restroom	3	Door	Stall Door	Solid	Metal	0.15
359	1952 Bldg.	268	XRF	6/5/97	2	Restroom	3	Window	Casing	Solid	Wood	0.01
360	1952 Bldg.	269	XRF	6/5/97	2	Restroom	3		Radiator	Solid	Metal	0.02
361	1952 Bldg.	270	XRF	6/5/97	2	Restroom	3	Wall	Middle Wall	Solid	Plaster	0
362	1952 Bldg.	271	XRF	6/5/97	2	Restroom	3	Door	Casing	Solid	Wood	0.01
363	1952 Bldg.	272	XRF	6/5/97	2	Restroom	4	Wall	Middle Wall	Solid	Plaster	0.26
364	1952 Bldg.	273	XRF	6/5/97	2	Restroom	4	Wall	Chair rail	Solid	Wood	0
365	1952 Bldg.	274	XRF	6/5/97	2	Restroom	4	Wall	Baseboar	Solid	Concrte	0.08
366	1952 Bldg.	275	XRF	6/5/97	2	Restroom	4	Window	Casing	Solid	Wood	0.11
367	1952 Bldg.	276	XRF	6/5/97	2	Restroom	4		Radiator	Peeling	Metal	0.1
368	1952 Bldg.	277	XRF	6/5/97	2	Restroom	4	Door	Stall Door	Solid	Wood	0.02
369	1952 Bldg.	278	XRF	6/5/97	2	Restroom	4	Door	Door	Solid	Wood	0.03
370	1952 Bldg.	140	XRF	6/3/97	1	Room	113	Wall	Middle Wall	Solid	Drywall	0
371	1952 Bldg.	141	XRF	6/3/97	1	Room	113	Door	Casing	Solid	Metal	0
372	1952 Bldg.	142	XRF	6/3/97	1	Room	113	Wall	Middle Wall	Solid	Concrte	0
373	1952 Bldg.	143	XRF	6/3/97	1	Room	113	Wall	Middle Wall	Solid	Concrte	0
374	1952 Bldg.	144	XRF	6/3/97	1	Room	113		Radiator	Solid	Metal	0
375	1952 Bldg.	145	XRF	6/3/97	1	Room	113		Radiator	Solid	Metal	0
376	1952 Bldg.	146	XRF	6/3/97	1	Room	113	Door	Casing	Solid	Metal	0
377	1952 Bldg.	147	XRF	6/3/97	1	Room	113	Door	Door	Solid	Wood	0
378	1952 Bldg.	80	XRF	6/6/97	1	Stairwell	1	Wall	Wall	Solid	Concrte	0.02
379	1952 Bldg.	81	XRF	6/6/97	1	Stairwell	1	Stairs	Baseboar	Solid	Metal	0
380	1952 Bldg.	82	XRF	6/6/97	1	Stairwell	1	Stairs	Hand rail	Solid	Metal	0
381	1952 Bldg.	83	XRF	6/6/97	1	Stairwell	1	Wall	Wall	Solid	Plaster	0
382	1952 Bldg.	84	XRF	6/6/97	1	Stairwell	1	Door	Door	Solid	Wood	0.05
383	1952 Bldg.	85	XRF	6/6/97	1	Stairwell	1	Door	Casing	Solid	Metal	0
384	1952 Bldg.	86	XRF	6/6/97	1	Stairwell	1	Door	Door	Solid	Metal	0

Saint Paul Public Schools
Eastern Heights Elementary
Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
385	1952 Bldg.	87	XRF	6/6/97	1	Stairwell	1		Radiator	Solid	Metal	0
386	1952 Bldg.	88	XRF	6/6/97	1	Stairwell	2	Wall	Midle Wall	Solid	Plaster	0.09
387	1952 Bldg.	89	XRF	6/6/97	1	Stairwell	2	Wall	Chair rail	Solid	Wood	0.05
388	1952 Bldg.	90	XRF	6/6/97	1	Stairwell	2	Stairs	Hand rail	Solid	Wood	0
389	1952 Bldg.	91	XRF	6/6/97	1	Stairwell	2	Door	Door	Solid	Metal	0.01
390	1952 Bldg.	92	XRF	6/6/97	1	Stairwell	2	Door	Casing	Solid	Wood	0.32
391	1952 Bldg.	93	XRF	6/6/97	1	Stairwell	2		Radiator	Solid	Metal	0.02
392	1952 Bldg.	94	XRF	6/6/97	1	Stairwell	2	Wall	Midle Wall	Solid	Concrte	0.09
393	1952 Bldg.	95	XRF	6/6/97	1	Stairwell	2	Ladder		Solid	Wood	4.04
394	1952 Bldg.	96	XRF	6/6/97	1	Stairwell	2	Door	Door	Solid	Wood	0.02
395	1952 Bldg.	97	XRF	6/6/97	1	Stairwell	3	Stairs	Hand rail	Solid	Metal	0
396	1970 Bldg.	74	XRF	6/3/97	1	Classroom	105	Wall	Wall	Solid	Concrte	0
397	1970 Bldg.	75	XRF	6/3/97	1	Classroom	105	Wall	Midle Wall	Solid	Concrte	0
398	1970 Bldg.	76	XRF	6/3/97	1	Classroom	105	Door	Casing	Solid	Wood	0
399	1970 Bldg.	77	XRF	6/3/97	1	Classroom	105	Door	Door	Solid	Wood	0
400	1970 Bldg.	78	XRF	6/3/97	1	Classroom	105	Wall	Wall	Solid	Plaster	0
401	1970 Bldg.	79	XRF	6/3/97	1	Classroom	105	Window	Casing	Solid	Wood	0
402	1970 Bldg.	80	XRF	6/3/97	1	Classroom	105	Wall	Midle Wall	Solid	Concrte	0.1
403	1970 Bldg.	81	XRF	6/3/97	1	Classroom	105	Window	Stool	Solid	Wood	0
404	1970 Bldg.	37	XRF	6/3/97	1	Classroom	106	Wall	Wall	Solid	Concrte	0.05
405	1970 Bldg.	38	XRF	6/3/97	1	Classroom	106	Wall	Midle Wall	Solid	Concrte	0
406	1970 Bldg.	39	XRF	6/3/97	1	Classroom	106	Window	Casing	Solid	Wood	0.01
407	1970 Bldg.	40	XRF	6/3/97	1	Classroom	106	Wall	Wall	Solid	Concrte	0
408	1970 Bldg.	41	XRF	6/3/97	1	Classroom	106	Wall	Midle Wall	Solid	Concrte	0.06
409	1970 Bldg.	42	XRF	6/3/97	1	Classroom	106	Door	Casing	Solid	Wood	0
410	1970 Bldg.	43	XRF	6/3/97	1	Classroom	106	Door	Door	Solid	Wood	0.01
411	1970 Bldg.	82	XRF	6/3/97	1	Classroom	107	Wall	Midle Wall	Solid	Plaster	0
412	1970 Bldg.	83	XRF	6/3/97	1	Classroom	107	Door	Casing	Solid	Metal	0
413	1970 Bldg.	84	XRF	6/3/97	1	Classroom	107	Wall	Midle Wall	Solid	Concrte	0
414	1970 Bldg.	85	XRF	6/3/97	1	Classroom	107	Wall	Midle Wall	Solid	Concrte	0
415	1970 Bldg.	86	XRF	6/3/97	1	Classroom	107	Door	Door	Solid	Wood	0
416	1970 Bldg.	87	XRF	6/3/97	1	Classroom	107	Wall	Midle Wall	Solid	Drywall	0
417	1970 Bldg.	88	XRF	6/3/97	1	Classroom	107	Wall	Wall	Solid	Concrte	0
418	1970 Bldg.	89	XRF	6/3/97	1	Classroom	107	Door	Casing	Solid	Metal	0
419	1970 Bldg.	90	XRF	6/3/97	1	Classroom	107		Radiator	Solid	Metal	0
420	1970 Bldg.	91	XRF	6/3/97	1	Classroom	107	Window	Stool	Solid	Concrte	0
421	1970 Bldg.	92	XRF	6/3/97	1	Classroom	107		Radiator	Solid	Metal	0.01
422	1970 Bldg.	31	XRF	6/3/97	1	Classroom	108	Wall	Wall	Solid	Concrte	0
423	1970 Bldg.	32	XRF	6/3/97	1	Classroom	108	Wall	Wall	Solid	Concrte	0
424	1970 Bldg.	33	XRF	6/3/97	1	Classroom	108	Window	Casing	Solid	Wood	0.01
425	1970 Bldg.	34	XRF	6/3/97	1	Classroom	108	Wall	Midle Wall	Solid	Concrte	0
426	1970 Bldg.	35	XRF	6/3/97	1	Classroom	108	Door	Door	Solid	Wood	0.02
427	1970 Bldg.	36	XRF	6/3/97	1	Classroom	108	Door	Casing	Solid	Wood	0.01
428	1970 Bldg.	243	XRF	6/5/97	2	Classroom	206	Wall	Wall	Solid	Concrte	0.11
429	1970 Bldg.	244	XRF	6/5/97	2	Classroom	206	Ceiling		Solid	Concrte	0.01
430	1970 Bldg.	245	XRF	6/5/97	2	Classroom	206	Window	Casing	Solid	Wood	0
431	1970 Bldg.	246	XRF	6/5/97	2	Classroom	206	Wall	Midle Wall	Solid	Plaster	0.31
432	1970 Bldg.	247	XRF	6/5/97	2	Classroom	206	Door	Casing	Solid	Wood	0.01
433	1970 Bldg.	248	XRF	6/5/97	2	Classroom	206	Door	Door	Solid	Wood	0
434	1970 Bldg.	249	XRF	6/5/97	2	Classroom	206	Wall	Midle Wall	Solid	Concrte	0.04
435	1970 Bldg.	313	XRF	6/5/97	2	Classroom	207	Door	Casing	Solid	Wood	0
436	1970 Bldg.	314	XRF	6/5/97	2	Classroom	207	Door	Door	Solid	Wood	0
437	1970 Bldg.	315	XRF	6/5/97	2	Classroom	207	Wall	Wall	Solid	Concrte	0.01
438	1970 Bldg.	316	XRF	6/5/97	2	Classroom	207	Wall	Wall	Solid	Concrte	0.07
439	1970 Bldg.	317	XRF	6/5/97	2	Classroom	207	Wall	Wall	Solid	Concrte	0
440	1970 Bldg.	318	XRF	6/5/97	2	Classroom	207	Wall	Midle Wall	Solid	Concrte	0.01
441	1970 Bldg.	319	XRF	6/5/97	2	Classroom	207	Window	Casing	Solid	Wood	0
442	1970 Bldg.	236	XRF	6/5/97	2	Classroom	208	Wall	Wall	Solid	Plaster	0.31
443	1970 Bldg.	237	XRF	6/5/97	2	Classroom	208	Window	Casing	Solid	Wood	0.01
444	1970 Bldg.	238	XRF	6/5/97	2	Classroom	208	Wall	Midle Wall	Solid	Concrte	0.01
445	1970 Bldg.	239	XRF	6/5/97	2	Classroom	208	Ceiling		Solid	Concrte	0
446	1970 Bldg.	240	XRF	6/5/97	2	Classroom	208	Door	Casing	Solid	Wood	0
447	1970 Bldg.	241	XRF	6/5/97	2	Classroom	208	Door	Door	Solid	Wood	0
448	1970 Bldg.	242	XRF	6/5/97	2	Classroom	208	Wall	Midle Wall	Solid	Concrte	0

APPENDIX B

LABORATORY SAMPLE ANALYSIS DATA


LABORATORY ANALYSIS REPORT**DATE:** June 25, 1997**PAGE:** 1 Of 1**CLIENT:** Midwest Environmental Cons.
5385 401st Ave. NW
Dalbo, MN 55017**PROJECT NO.:** 061197-200888
COLLECTION DATE: 6/07/97
COLLECTED BY: Client
RECEIVED DATE: 6/11/97
PROJECT DESCRP.: 62/0197AH**CONTACT:** Richard Cox/Greg Myers

<u>SAMPLE #</u>	<u>DESCP.</u>	<u>MDL</u>	LEAD (6010A) <i>Units=mg/kg</i>	ANALYSIS
			<u>RESULTS</u>	<u>DATE</u>
L973583-1	PC1	9.1	1100	6/25/97
L973583-2	PC2	48	2900	6/25/97
L973583-3	PC3	19	1900	6/25/97
L973583-4	PC4	35	6300	6/25/97

*ND means Not Detected or below reported MDL**MDL means Method Detection Limit**mg/kg means Milligrams Per Kilogram which is equivalent to Parts Per Million (ppm)*

This report has been reviewed by me for technical accuracy and completeness. The analyses were performed using EPA or other approved methodologies and the results were reported on an "as received" basis unless otherwise noted. Organic soil analyses were reported on a dry weight basis. The results reported relate only to the items tested. Please contact me if you have any questions or comments regarding this report. Spectrum Labs, Inc. appreciates the opportunity to provide this analytical service for you.

Report Submitted By,


Thomas L. Halverson
Laboratory ManagerTLH:wmc
mec176-1*As a mutual protection, all reports are submitted in confidentiality and may not be reproduced except in full without written authorization.*

APPENDIX C INSPECTOR

Bob Hargrove
MDH Lead Inspector # 416