


Midwest
Environmental
Consulting, L.L.C.

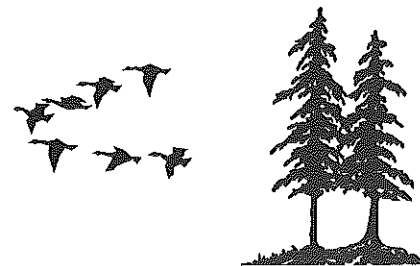

 Printed on Recycled Paper

**Farnsworth Outcome Based Education Magnet School
Saint Paul Public Schools**

Lead-Based Paint Inspection

Inspection Dates: 4/4/97, 4/5/97, 4/6/97

submitted to:

Saint Paul Public Schools

MEC Project # 62/0197L

38894 Llama Street NW * Dalbo, Minnesota 55017 * (612) 689-3612
fax (612) 689-5209

INTRODUCTION

At the request of Saint Paul Public Schools Environmental Safety Department, Midwest Environmental Consulting, L.L.C. (MEC), conducted a lead-based paint inspection at Farnsworth Outcome based Education Magnet School, 1290 Arcade Street, St. Paul, MN. The purpose of this inspection was to identify lead-based painted, varnished, or otherwise coated building components on the interior and exterior of the school building.

The inspection protocol incorporated applicable portions of the U.S. Department of Housing and Urban Development (HUD) *Guidelines for the Evaluation and Control of Lead-based Paint Hazards in Housing* (HUD Guidelines, June 1995) and OSHA 1926.62 requirements (Lead in Construction). The HUD guidelines are formulated to guide agencies in conducting random sampling of the interiors and exteriors of dwellings and common areas in public housing. The OSHA requirement is designed to minimize worker exposure when working with material containing lead.

Confirmatory testing was conducted when inconclusive XRF results were encountered. Inconclusive refers to XRF readings less than 0.2 mg/cm² (milligrams per square centimeter). Inconclusive results were confirmed with laboratory analysis of paint chip samples (Appendix B). This report contains a list of such results.

The United States Environmental Protection Agency defines "lead-based paint" as a paint or other surface coating that contains lead equal to or in excess of 1.0 milligrams per square centimeter when analyzed by XRF or more than 0.5% by weight (5000 parts per million) by laboratory analysis of a bulk sample.

Minnesota Department of Labor and Industry (MN OSHA) adopted the EPA lead levels for the purpose of enforcing OSHA 1926.62 federal regulations. Detection of lead in dried paint film by XRF is a dependable indicator of levels of lead and is accepted by MN OSHA.

For this Saint Paul Public Schools Lead Inspection, all building components were tested on site using a Niton XL® X-ray Fluorescence Spectrum Analyzer⁽¹⁾. Building components included walls, ceilings, floors, moldings, window and door components, door surfaces, and miscellaneous features such as shelves or bookcases. Only painted or glazed surfaces or surfaces which were varnished were tested. Suspended ceilings, structural steel, and corrugated decking were not included in the inspection. Neither anodized (e.g., window sashes) nor plastic (e.g., vinyl baseboard and vinyl mini-blinds) were included in the scope of this inspection.

⁽¹⁾ This is a portable hand held machine that can analyze building components instantly for lead concentrations.

Each building was divided into unique sites based on the year of construction or renovation. Portable classrooms, playgrounds, and other detached buildings were automatically designated as a unique site. Each site was inspected independently assuming differences in painting history and construction characteristics.

SITE DESCRIPTION AND BUILDING HISTORY

According to information provided to MEC by Saint Paul Public Schools, Farnsworth Outcome based Education Magnet School was constructed in essentially three phases. The initial phase includes the 5,826 square-foot older section of the building and dates from 1924. The second phase is a 31,771 square foot addition dating from 1964. The third phase is a 25,784 square foot addition from 1992.

The 1992 addition was not inspected.

All room and area designations used in this report are depicted on sampling maps found in Appendix A.

XRF SAMPLE RESULTS TABLE

The results of all samples analyzed are listed in the table at the end of this section. The following is a description of the column headings:

Site	Each school is divided into sites based on their unique construction characteristics. Each site has a unique date of construction or major renovation.	
Sample #	Each sample taken was given a unique number to identify the type and location of the sample. The sampling date is an integral part of the sample number.	
Analysis	This defines the type of analysis which can be categorized into two types:	
	1) XRF:	This is an on-site analysis using a hand held Niton XL® X-ray Fluorescence Spectrum Analyzer;
	2) Bulk or Chip:	This is a bulk sample where paint is removed from the substrate and sent to a laboratory for analysis;
Floor	This is the level of the building in which the area tested was found, example, 1 (first floor), 0 (basement), etc.	

- Area** This further defines the specific functional space inspected such as a classroom, exterior, playground, gym, kitchen, etc.
- Room #** This is typically the actual number on the room as identified at the building.
- Component** Building "components" included walls, ceilings, floors, moldings, window and door components, door surfaces, and miscellaneous features such as shelves or bookcases.
- Feature** Identifies more detailed information of the component.
- Condition** This describes condition of the surface, whether it is intact, cracked, peeling, or chalking.
- Substrate** This refers to the material the building component is made of (wood, concrete, drywall, metal, etc.).
- Result** This is the analysis results for lead. Less than 1.0 mg/cm² or less than 0.5% by weight is considered to be non-lead and these building components are below the action levels of EPA and HUD. (All results are in mg/cm² except where noted.)

The table of results is designed for quick information on lead concentrations of tested building components. Generally, all repetitions of a test combination within a given room or area, may be assumed to contain similar concentrations of lead to that of the tested sample. For instance, the lead concentration of a tested wooden window sash was found to be above the action level of 1.0 mg/cm² in a given classroom. The classroom has five windows, all of wood, the same color and appearing to be of the same era. It can be assumed that the remaining four wooden window sashes each contain lead above the action limit.

Other columns identify the component and the component feature tested, condition of the component, type of substrate and the result of the analytical test.

As an example, the following illustration shows that the wooden door jamb in Room 123, first floor in the 1923 building section was in good, solid condition, and had an XRF test result of 0.3 mg/cm², which is below the action level.

Illustration Only

Site	Sample #	Date	Analysis	Floor	Area	Room #	Component	Feature	Condition	Substrate	Results
1923 Bldg.	52		XRF	1	Room	123	Door	Jamb	Solid	Wood	0.3

In a similar manner, the table shows that the plaster walls in room 23, on the second floor has peeling paint with more than 1.0 mg/cm² (shaded).

ILLUSTRATION ONLY

Site	Sample #	Date	Analysis	Floor	Area	Room #	Component	Feature	Condition	Substrate	Results
1910 Bldg.	16		XRF	2	Room	23	Door	Jamb	Peeling	Wood	0.25
1910 Bldg.	17		XRF	2	Room	23	Wall	Wall	Peeling	Plaster	1.2
1910 Bldg.	18		XRF	2	Room	23		Ceiling	Peeling	Plaster	0.25
1910 Bldg.	19		XRF	2	Room	23	Wall	Baseboard	Peeling	Wood	0.002

APPLICABLE REGULATIONS

When building components test above 1.0 mg/cm² of lead by XRF or 0.5% lead by weight from laboratory analysis all employees and contractors who will be working with these components in a construction related activity must be notified. The requirements of OSHA 1926.62, Lead in Construction are enforceable. This regulation defines construction work as "work for construction, alteration and/or repair, including painting and decorating." This regulation further defines monitoring requirements to minimize employee exposure to lead during construction activities.

When work is performed on external painted building structures (i.e. flashing, fire escapes, playground equipment, handrails, etc.), regulations of the Minnesota Pollution Control Agency (MPCA) may also be applicable. For removal of lead based paint from steel structures, MN Rules 7025.0200 - 7025.0380 apply to steel materials on the exterior of a building, or on the property when levels exceed 0.5 mg/cm² based on the average of three XRF spectrum results of the sample tested, or 5,000 ppm by laboratory analysis. If it is other than a steel surface, then MPCA regulates the painted surfaces under MN Rules 7025.010 - 7025.0080, when surfaces are to be disturbed using abrasive blasting methods.

Please contact MEC directly if you have questions about any portion of this report or the lead-based paint inspection itself.

APPENDIX A


**XRF TESTING DATA
WITH
LOCATION MAPS**

4/6/97

Farnsworth

C

BASEMENT FLOOR PLAN

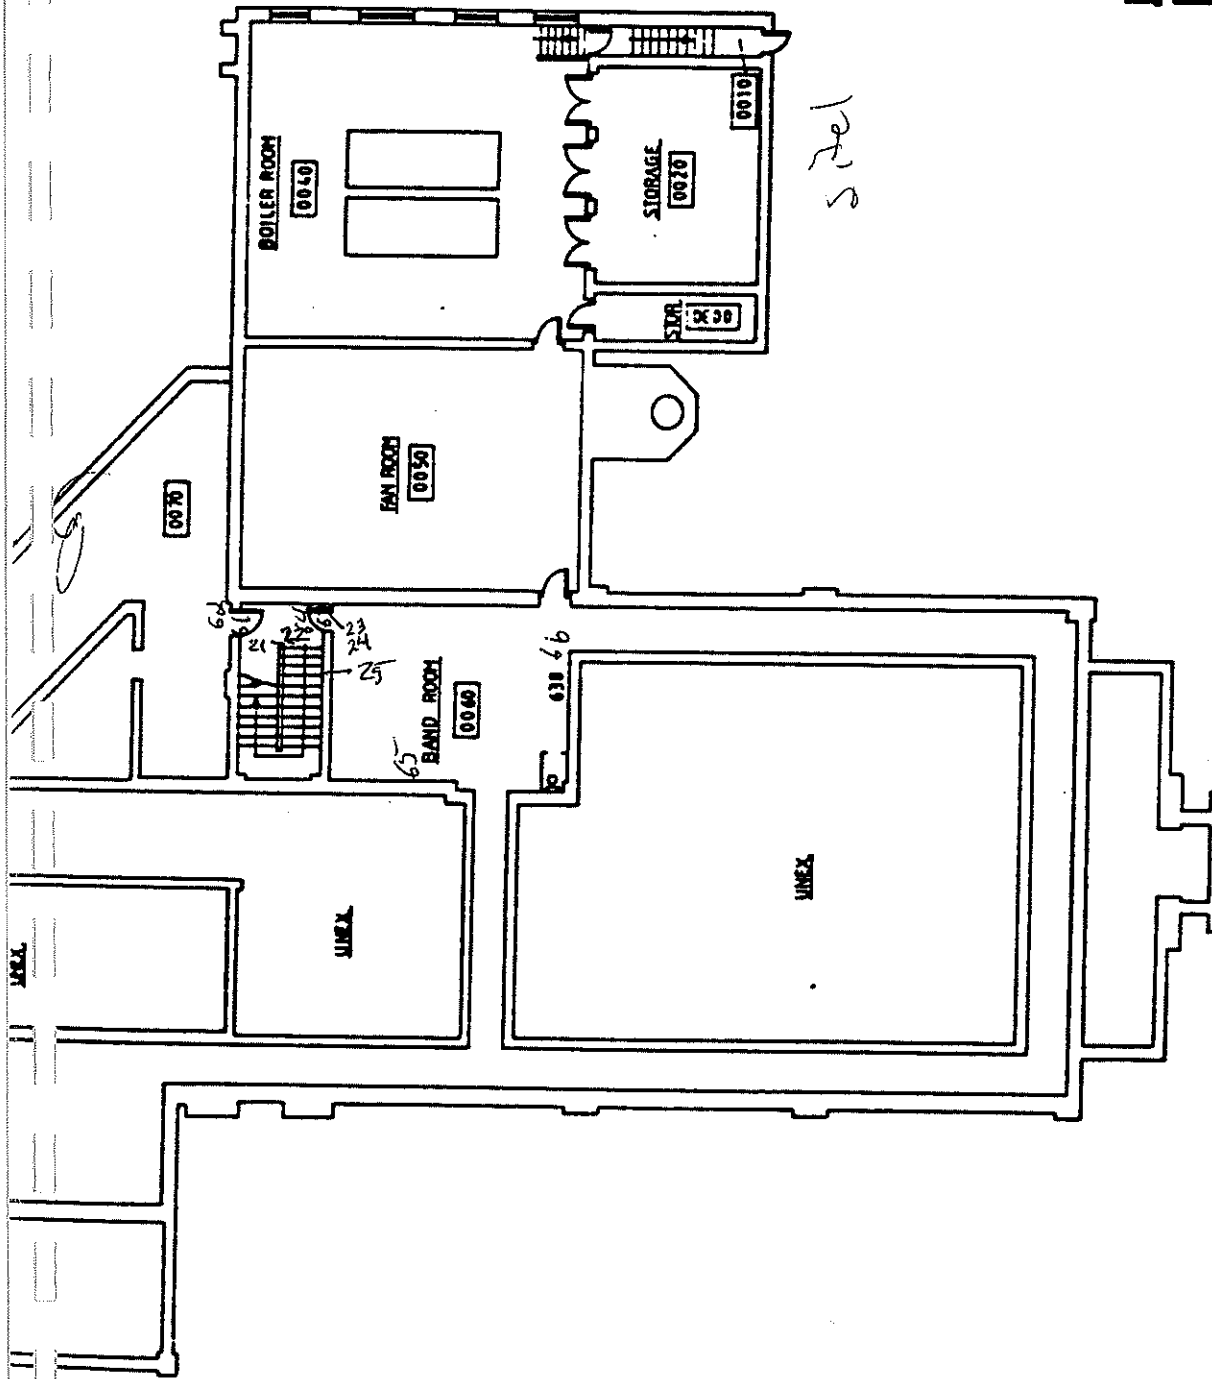


Sitel

D


Handwritten mark resembling a stylized 'D' or a circle with a horizontal line through it.

H

A

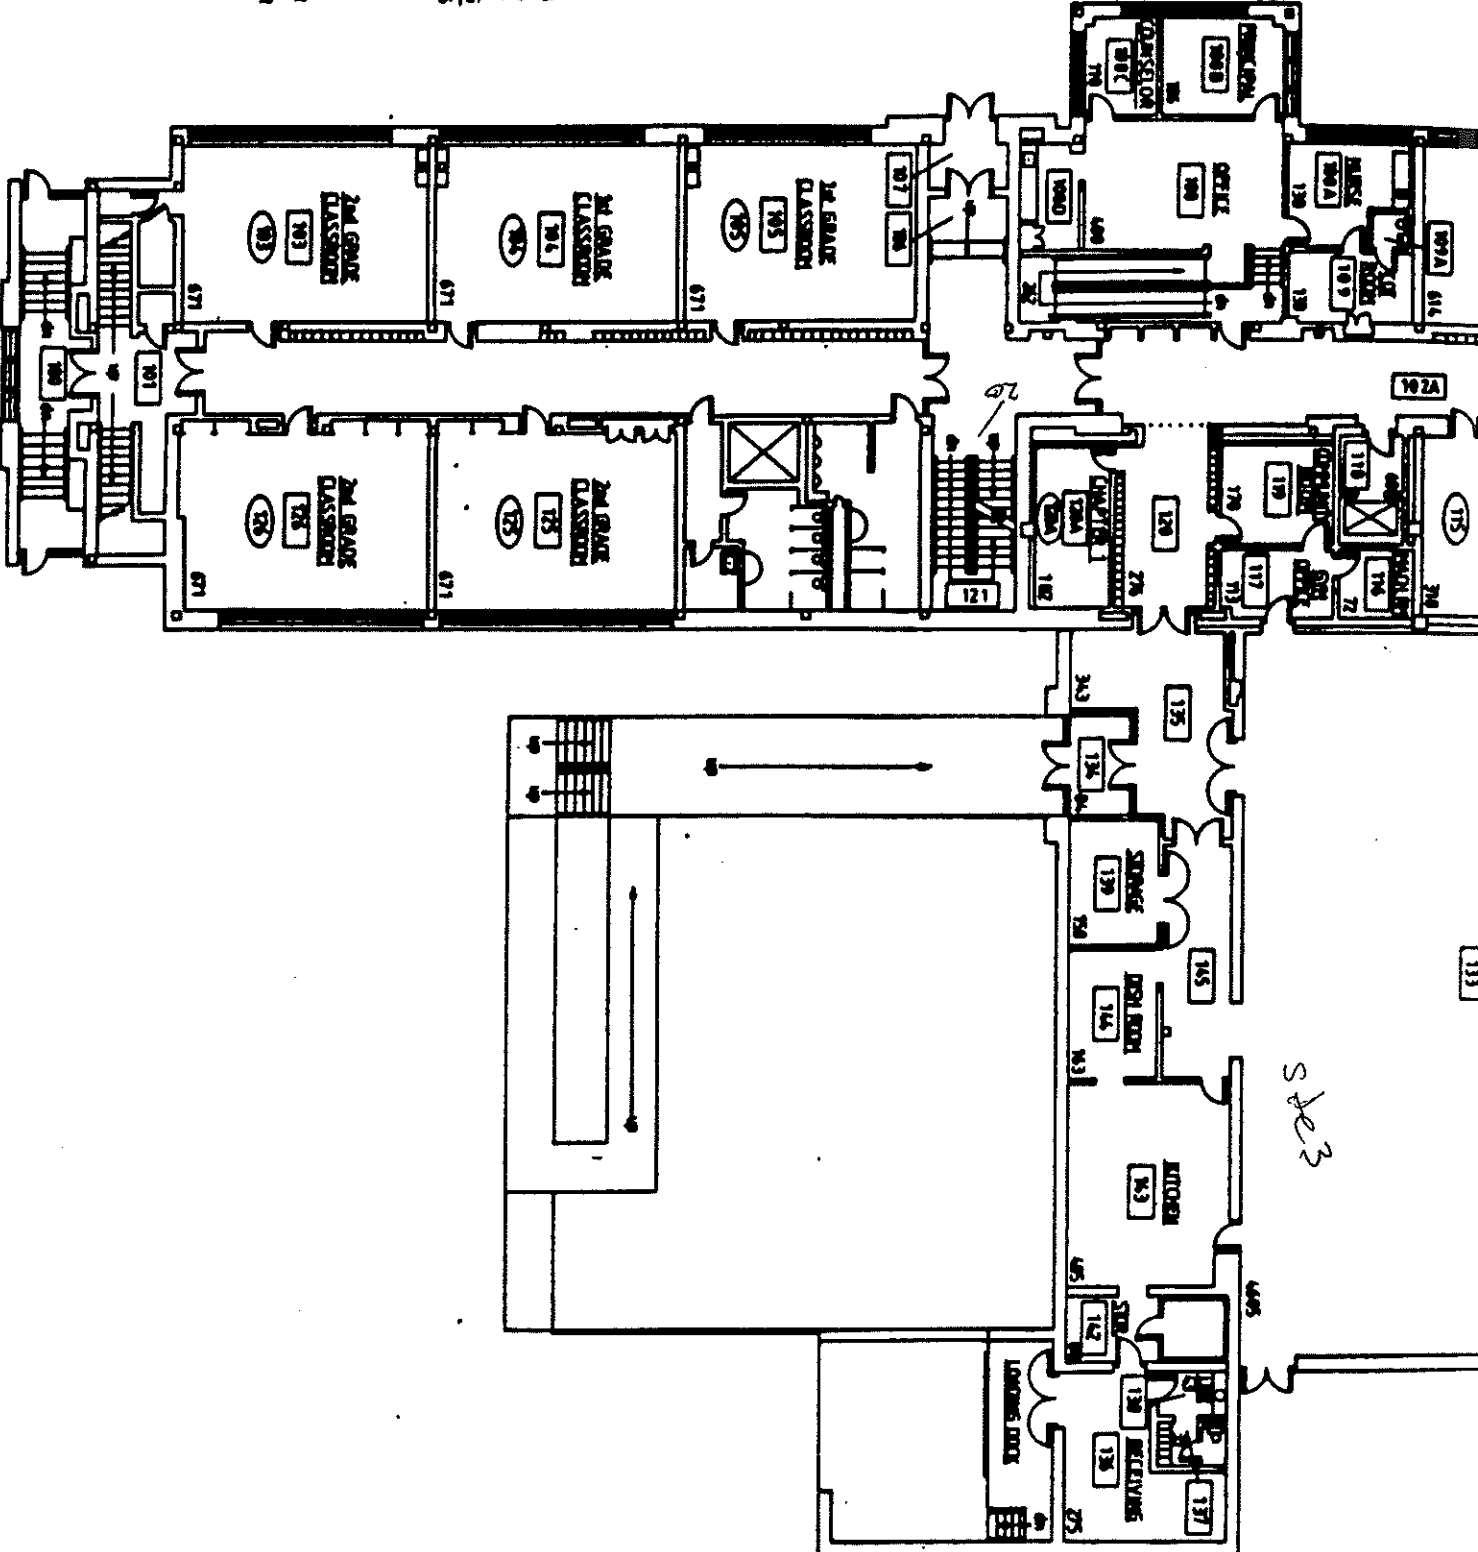


See 3




Sheet 1


SECOND FLOOR PLAN

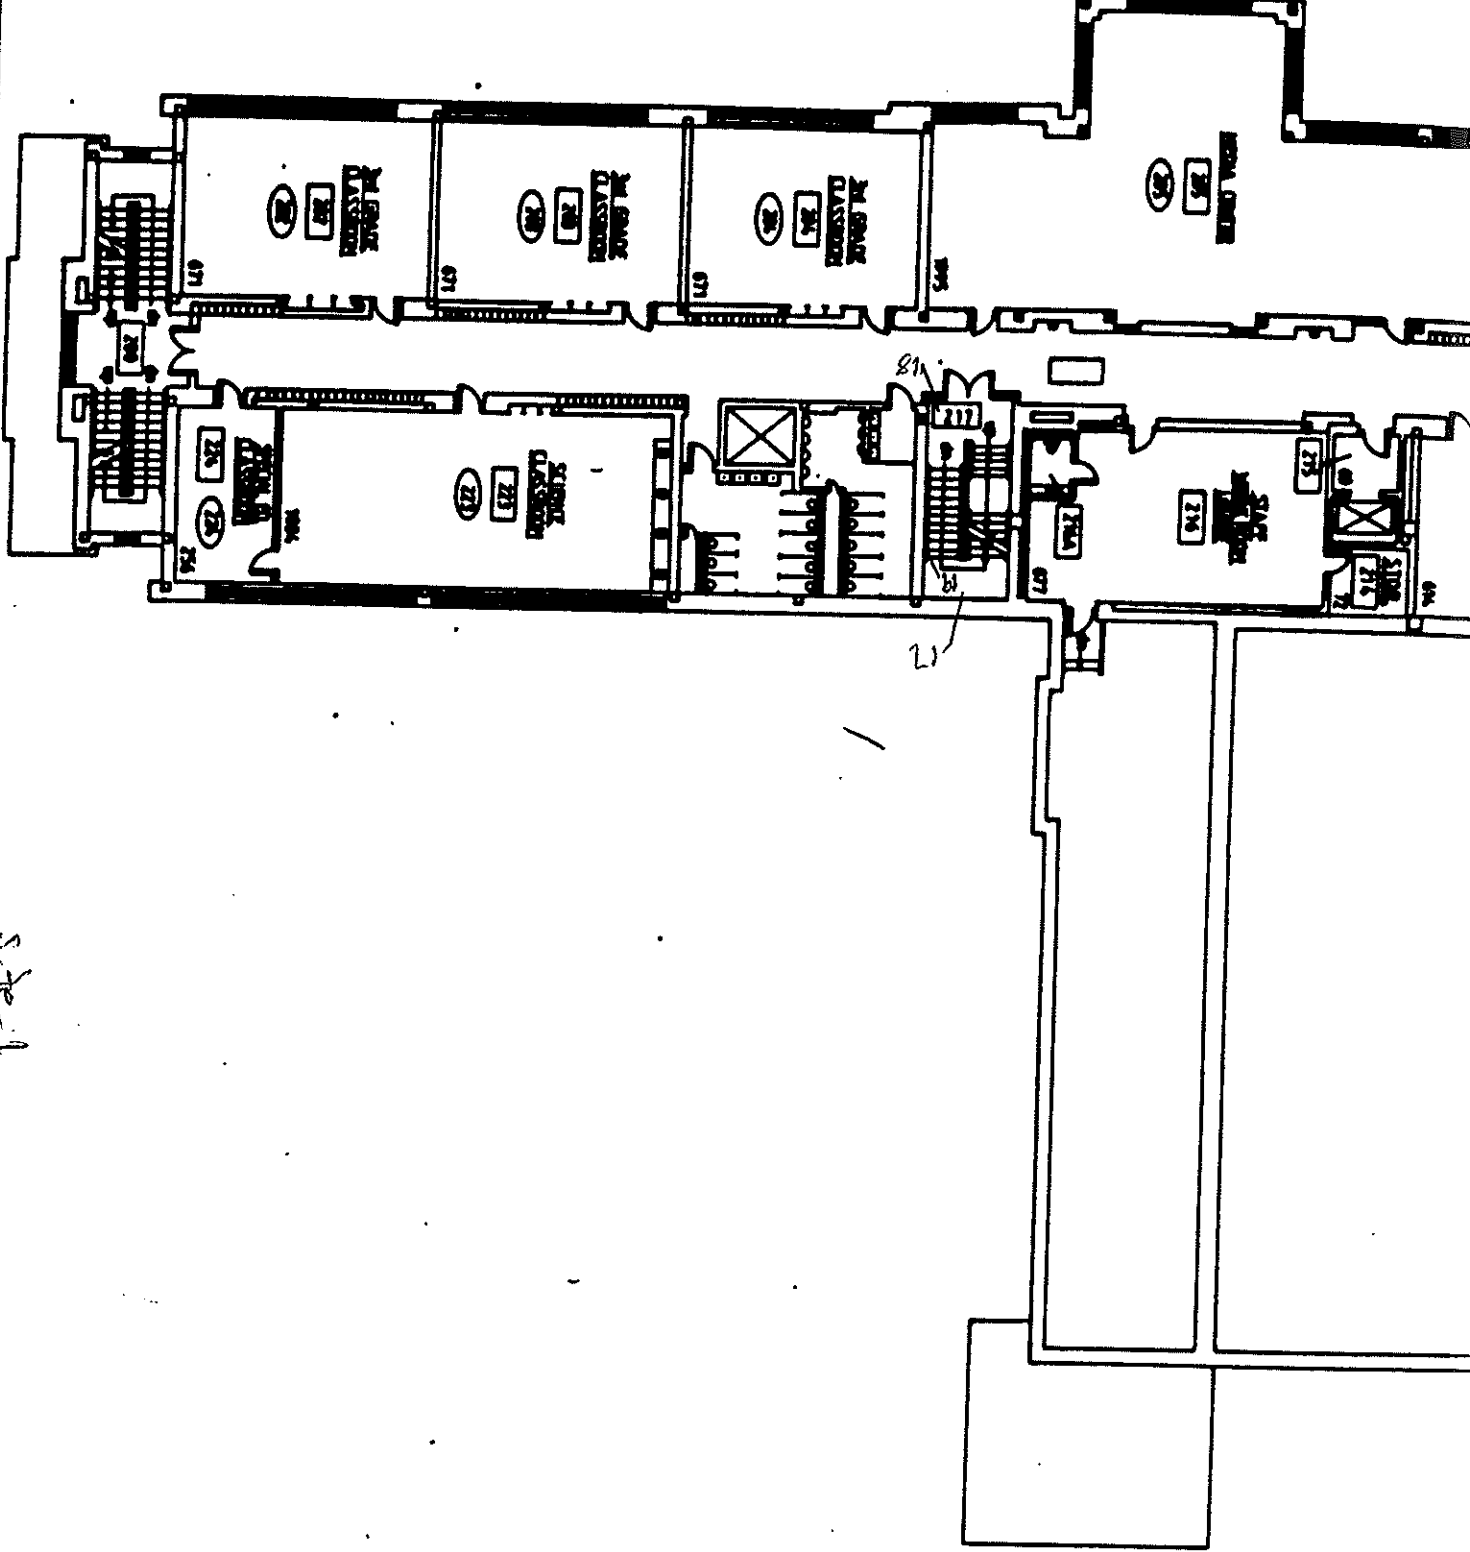

4/4/97

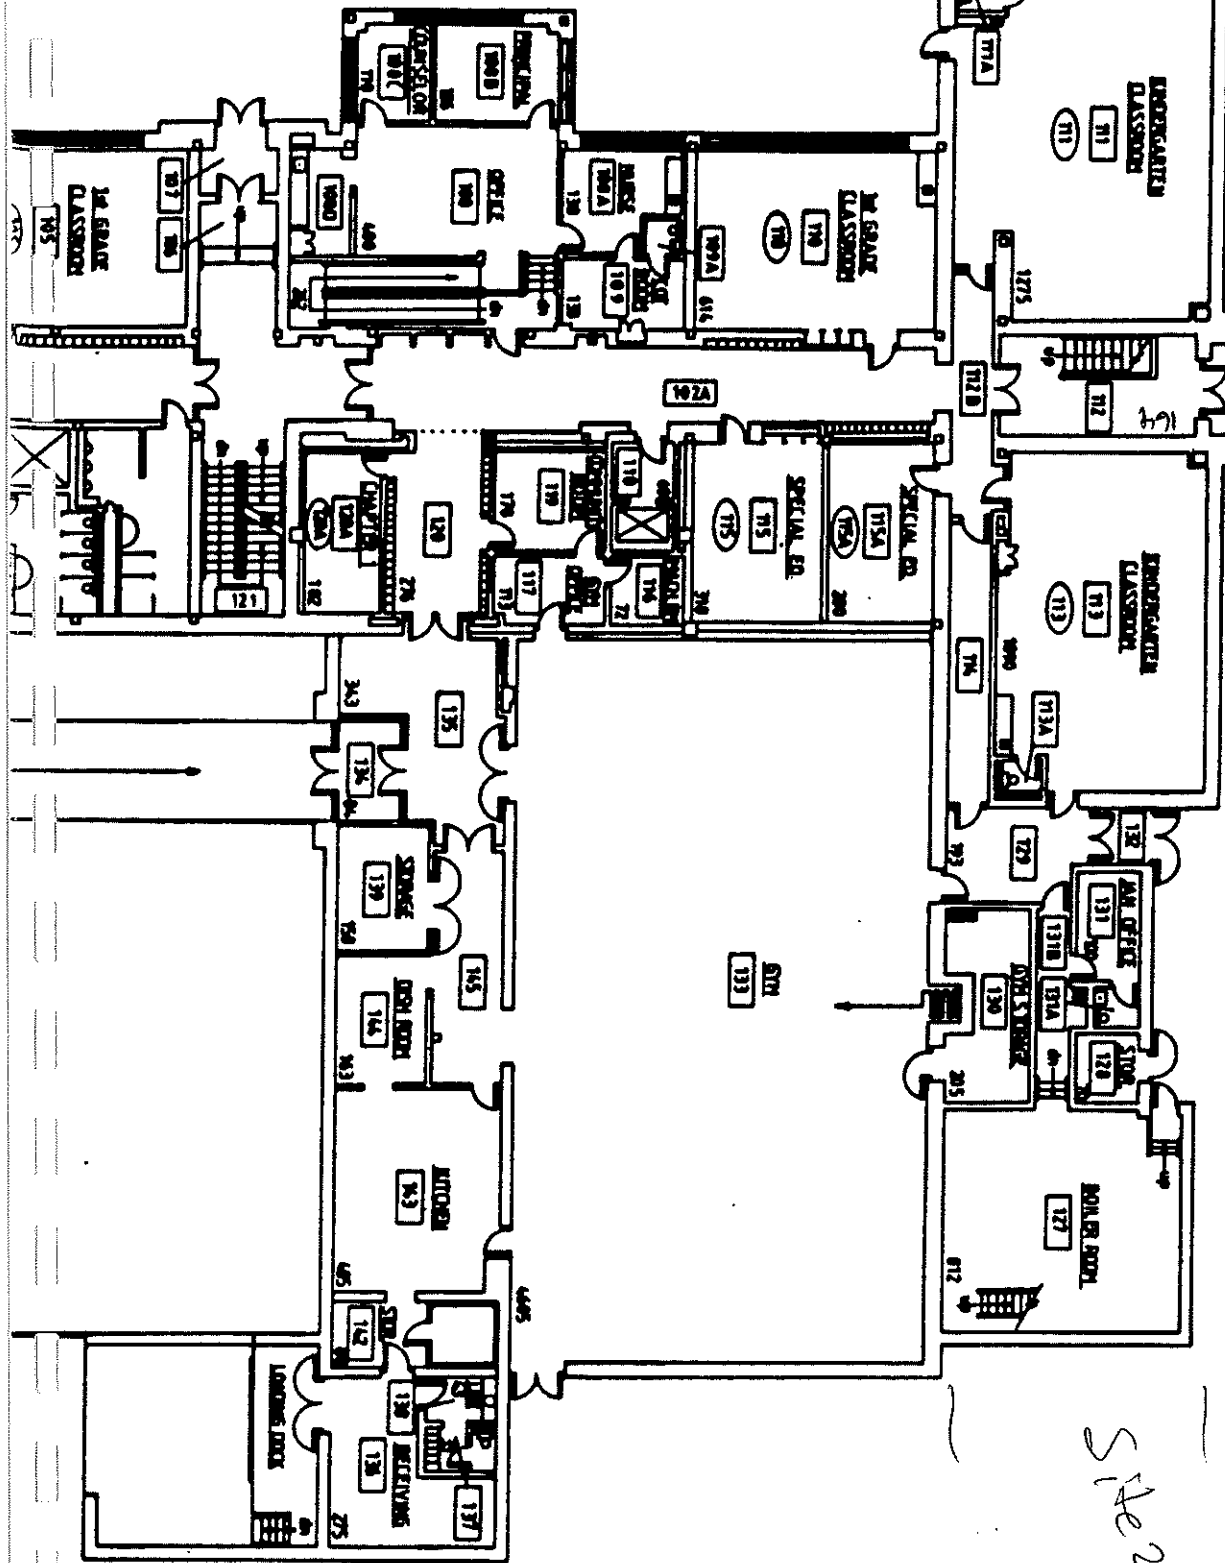

Site 2

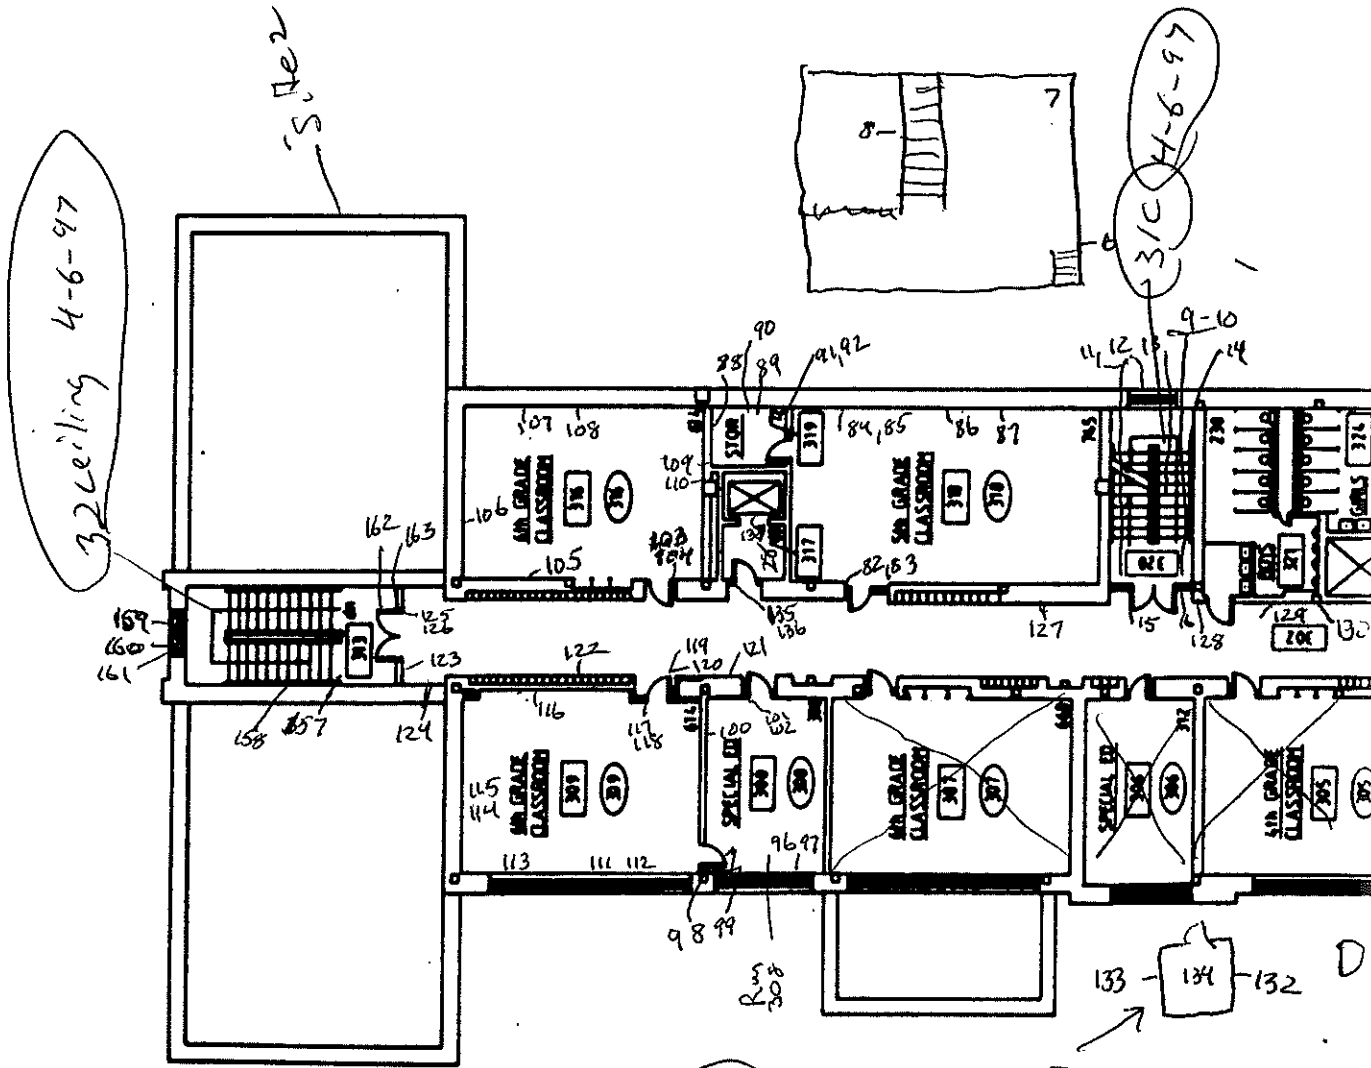

32 ceiling 4-6-97

31C 4-6-97

4-6-97 ceiling
Rm 317
Sample
2/26

Hall 300+29
Dinner


ceiling
closet
next to
306

133 - 134 - 132

Farnsworth Elem.

Drawing 1
4/4/97

A



4/4/97 FARNSWORTH Elem.

Saint Paul Public Schools
Farnsworth Outcome Based Education Magnet School
Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
1	Farnsworth											
2												
3	Site	Sample #	Analysis	Date	Floor	Area	Room#	Component	Feature	Condition	Substrate	Result
4	1924 Bldg.	171	XRF	4/4/97	2	Bath		1 Door	Door	Solid	Wood	0
5	1924 Bldg.	172	XRF	4/4/97	2	Bath		1 Door	Casing	Solid	Metal	0.02
6	1924 Bldg.	173	XRF	4/4/97	2	Bath		1 Wall	Midle Wall	Solid	Tile	5.09
7	1924 Bldg.	174	XRF	4/4/97	2	Bath		1	Radiator	Solid	Metal	0.02
8	1924 Bldg.	175	XRF	4/4/97	2	Bath		1 Door	Door	Solid	Wood	3.99
9	1924 Bldg.	176	XRF	4/4/97	2	Bath		1 Door	Casing	Solid	Wood	5.09
10	1924 Bldg.	177	XRF	4/4/97	2	Bath		1 Floor		Solid	Concrte	0.03
11	1924 Bldg.	39	XRF	4/6/97	2	Bath		1 Ceiling		Solid	Plaster	0.08
12	1924 Bldg.	178	XRF	4/4/97	2	Bath		2 Door	Door	Solid	Wood	0
13	1924 Bldg.	179	XRF	4/4/97	2	Bath		2 Door	Casing	Solid	Metal	0
14	1924 Bldg.	180	XRF	4/4/97	2	Bath		2 Wall	Midle Wall	Solid	Tile	5.09
15	1924 Bldg.	181	XRF	4/4/97	2	Bath		2 Coat Rack		Solid	Wood	0.06
16	1924 Bldg.	182	XRF	4/4/97	2	Bath		2	Radiator	Solid	Metal	0
17	1924 Bldg.	183	XRF	4/4/97	2	Bath		2 Wall	Wall	Solid	Concrte	0.06
18	1924 Bldg.	184	XRF	4/4/97	2	Bath		2 Door	Door	Solid	Wood	5.09
19	1924 Bldg.	185	XRF	4/4/97	2	Bath		2 Door	Casing	Solid	Wood	5.09
20	1924 Bldg.	186	XRF	4/4/97	2	Bath		2 Wall	Midle Wall	Solid	Drywall	0.05
21	1924 Bldg.	187	XRF	4/4/97	2	Bath		2 Floor		Chalking	Concrte	0.01
22	1924 Bldg.	38	XRF	4/6/97	2	Bath		2 Ceiling		Solid	Plaster	5.09
23	1924 Bldg.	49	XRF	4/6/97	1	Bath		4 Ceiling		Solid	Drywall	0
24	1924 Bldg.	139	XRF	4/4/97	3	Bath	321	Door	Door	Solid	Wood	0
25	1924 Bldg.	140	XRF	4/4/97	3	Bath	321	Door	Casing	Solid	Metal	0.01
26	1924 Bldg.	141	XRF	4/4/97	3	Bath	321	Door	Casing	Solid	Tile	5.09
27	1924 Bldg.	142	XRF	4/4/97	3	Bath	321		Radiator	Solid	Metal	0.03
28	1924 Bldg.	143	XRF	4/4/97	3	Bath	321	Wall	Wall	Solid	Concrte	0.07
29	1924 Bldg.	144	XRF	4/4/97	3	Bath	321	Door	Door	Solid	Wood	5.09
30	1924 Bldg.	145	XRF	4/4/97	3	Bath	321	Door	Casing	Solid	Wood	5.09
31	1924 Bldg.	146	XRF	4/4/97	3	Bath	321	Wall	Midle Wall	Solid	Drywall	0.09
32	1924 Bldg.	147	XRF	4/4/97	3	Bath	321	Floor		Cracked	Concrte	0.56
33	1924 Bldg.	25	XRF	4/6/97	3	Bath	321	Ceiling		Solid	Plaster	0.04
34	1924 Bldg.	148	XRF	4/4/97	3	Bath	324	Door	Door	Solid	Wood	0
35	1924 Bldg.	149	XRF	4/4/97	3	Bath	324	Door	Casing	Solid	Metal	0
36	1924 Bldg.	150	XRF	4/4/97	3	Bath	324	Wall	Midle Wall	Solid	Tile	5.09
37	1924 Bldg.	151	XRF	4/4/97	3	Bath	324		Radiator	Solid	Metal	0.01
38	1924 Bldg.	152	XRF	4/4/97	3	Bath	324	Wall	Midle Wall	Solid	Concrte	0.03
39	1924 Bldg.	153	XRF	4/4/97	3	Bath	324	Door	Door	Solid	Wood	5.09
40	1924 Bldg.	154	XRF	4/4/97	3	Bath	324	Door	Casing	Solid	Wood	4.01
41	1924 Bldg.	155	XRF	4/4/97	3	Bath	324	Coat Rack		Solid	Wood	0.03
42	1924 Bldg.	156	XRF	4/4/97	3	Bath	324	Floor		Solid	Concrte	0.15
43	1924 Bldg.	24	XRF	4/6/97	3	Bath	324	Ceiling		Solid	Plaster	0.09
44	1924 Bldg.	193	XRF	4/4/97	2	Hall	210	Wall	Midle Wall	Solid	Drywall	0.07
45	1924 Bldg.	194	XRF	4/4/97	2	Hall	210	Locker		Solid	Metal	0.24
46	1924 Bldg.	195	XRF	4/4/97	2	Hall	210	Wall	Midle Wall	Solid	Concrte	0.06
47	1924 Bldg.	196	XRF	4/4/97	2	Hall	210	Wall	Chair rail	Solid	Wood	0.03
48	1924 Bldg.	197	XRF	4/4/97	2	Hall	210	Bulletin	Board	Solid	Wood	0.05
49	1924 Bldg.	198	XRF	4/4/97	2	Hall	210	Door	Door	Solid	Wood	0.03
50	1924 Bldg.	199	XRF	4/4/97	2	Hall	210	Door	Casing	Solid	Metal	0
51	1924 Bldg.	200	XRF	4/4/97	2	Hall	210	Cabinet	Door	Solid	Wood	0.05
52	1924 Bldg.	201	XRF	4/4/97	2	Hall	210	Wall	Wall	Solid	Concrte	0.13
53	1924 Bldg.	202	XRF	4/4/97	2	Hall	210	Door	Door	Solid	Metal	0
54	1924 Bldg.	203	XRF	4/4/97	2	Hall	210	Wall	Midle Wall	Cracked	Concrte	5.09
55	1924 Bldg.	204	XRF	4/4/97	2	Hall	210	Floor		Solid	Concrte	0.16
56	1924 Bldg.	205	XRF	4/4/97	2	Hall	210	Wall	Midle Wall	Solid	Concrte	0

Saint Paul Public Schools
Farnsworth Outcome Based Education Magnet School
Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
3	Site	Sample #	Analysis	Date	Floor	Area	Room#	Component	Feature	Condition	Substrate	Result
57	1924 Bldg.	33	XRF	4/6/97	2	Hall	210	Ceiling		Solid	Plaster	0.03
58	1924 Bldg.	165	XRF	4/4/97	3	Hall	301	Wall	Midle Wall	Solid	Concrte	3.35
59	1924 Bldg.	166	XRF	4/4/97	3	Hall	301		Chair rail	Solid	Wood	0.11
60	1924 Bldg.	167	XRF	4/4/97	3	Hall	301		Hand rail	Solid	Wood	0.06
61	1924 Bldg.	168	XRF	4/4/97	3	Hall	301	Coat Rack		Solid	Wood	0.03
62	1924 Bldg.	169	XRF	4/4/97	3	Hall	301	Window		Solid	Metal	0
63	1924 Bldg.	170	XRF	4/4/97	3	Hall	301		Radiator	Solid	Metal	0.02
64	1924 Bldg.	119	XRF	4/4/97	3	Hall	302	Door	Door	Solid	Wood	0
65	1924 Bldg.	120	XRF	4/4/97	3	Hall	302	Door	Casing	Solid	Metal	0
66	1924 Bldg.	121	XRF	4/4/97	3	Hall	302	Wall	Midle Wall	Solid	Drywall	0.18
67	1924 Bldg.	122	XRF	4/4/97	3	Hall	302		Locker	Solid	Metal	0.02
68	1924 Bldg.	123	XRF	4/4/97	3	Hall	302	Wall	Midle Wall	Solid	Concrte	0
69	1924 Bldg.	124	XRF	4/4/97	3	Hall	302		Radiator	Solid	Metal	0.01
70	1924 Bldg.	125	XRF	4/4/97	3	Hall	302	Door	Door	Solid	Metal	0.01
71	1924 Bldg.	126	XRF	4/4/97	3	Hall	302	Door	Casing	Solid	Metal	0
72	1924 Bldg.	127	XRF	4/4/97	3	Hall	302	Wall	Wall	Solid	Concrte	0.09
73	1924 Bldg.	128	XRF	4/4/97	3	Hall	302		Chair rail	Solid	Wood	0.11
74	1924 Bldg.	129	XRF	4/4/97	3	Hall	302	Wall	Wall	Solid	Concrte	3.35
75	1924 Bldg.	130	XRF	4/4/97	3	Hall	302	Cabinet	Door	Solid	Wood	0.03
76	1924 Bldg.	131	XRF	4/4/97	3	Hall	302	Locker	Midle Wall	Solid	Metal	0.34
77	1924 Bldg.	132	XRF	4/4/97	3	Hall	302	Wall	Midle Wall	Peeling	Concrte	5.09
78	1924 Bldg.	133	XRF	4/4/97	3	Hall	302	Wall	Midle Wall	Solid	Drywall	0.04
79	1924 Bldg.	134	XRF	4/4/97	3	Hall	302	Floor		Peeling	Concrte	0.05
80	1924 Bldg.	29	XRF	4/6/97	3	Hall	302	Ceiling		Solid	Plaster	0.08
81	1924 Bldg.	157	XRF	4/4/97	3	Hall	313	Wall	Midle Wall	Solid	Concrte	0
82	1924 Bldg.	158	XRF	4/4/97	3	Hall	313	Stairs	Hand rail	Solid	Metal	0
83	1924 Bldg.	159	XRF	4/4/97	3	Hall	313	Window	Casing	Solid	Metal	0
84	1924 Bldg.	160	XRF	4/4/97	3	Hall	313		Radiator	Solid	Metal	0
85	1924 Bldg.	161	XRF	4/4/97	3	Hall	313	Wall	Midle Wall	Solid	Drywall	0
86	1924 Bldg.	162	XRF	4/4/97	3	Hall	313	Door	Door	Solid	Metal	0
87	1924 Bldg.	163	XRF	4/4/97	3	Hall	313	Door	Casing	Solid	Metal	0
88	1924 Bldg.	164	XRF	4/4/97	3	Hall	313		Radiator	Solid	Metal	0
89	1924 Bldg.	9	XRF	4/4/97	4	Hall	320	Door	Door	Solid	Wood	3.58
90	1924 Bldg.	10	XRF	4/4/97	4	Hall	320	Door	Jamb	Solid	Metal	5.09
91	1924 Bldg.	11	XRF	4/4/97	4	Hall	320	Wall	Wall	Solid	Concrte	3.29
92	1924 Bldg.	12	XRF	4/4/97	4	Hall	320	Window	Casing	Solid	Metal	0
93	1924 Bldg.	13	XRF	4/4/97	4	Hall	320	Wall	Chair rail	Solid	Wood	0.12
94	1924 Bldg.	14	XRF	4/4/97	4	Hall	320	Stairs	Hand rail	Solid	Wood	0.04
95	1924 Bldg.	15	XRF	4/4/97	4	Hall	320	Door	Door	Solid	Metal	0.02
96	1924 Bldg.	16	XRF	4/4/97	4	Hall	320	Door	Casing	Solid	Metal	0.01
97	1924 Bldg.	17	XRF	4/4/97	4	Hall	320		Radiator	Solid	Metal	0
98	1924 Bldg.	6	XRF	4/4/97	4	Mechanical	1	Stairs	Baseboar	Solid	Metal	0.03
99	1924 Bldg.	7	XRF	4/4/97	4	Mechanical	1		Columns	Solid	Metal	0.08
100	1924 Bldg.	8	XRF	4/4/97	4	Mechanical	1	Wall	Midle Wall	Peeling	Concrte	0
101	1924 Bldg.	6	XRF	4/6/97	1	Outside	1	Window	Sill	Solid	Metal	0
102	1924 Bldg.	7	XRF	4/6/97	1	Outside	1	Ext Wall	Trim		Metal	0.04
103	1924 Bldg.	8	XRF	4/6/97	1	Outside	1	Door	Door	Solid	Metal	0.01
104	1924 Bldg.	9	XRF	4/6/97	1	Outside	1	Door	Jamb	Solid	Metal	0
105	1924 Bldg.	10	XRF	4/6/97	1	Outside	1	Ext Wall	Trim	Solid	Concrte	0.05
106	1924 Bldg.	11	XRF	4/6/97	1	Outside	1	Stairs	Hand rail	Solid	Metal	0.01
107	1924 Bldg.	12	XRF	4/6/97	1	Outside	1	Light Pole		Solid	Metal	0
108	1924 Bldg.	13	XRF	4/6/97	1	Outside	1	Post		Solid	Concrte	0.03
109	1924 Bldg.	14	XRF	4/6/97	1	Outside	1	Parking Stripe		Solid	Concrte	2.28
110	1924 Bldg.	17	XRF	4/6/97	1	Outside	1	Grounds	Fence	Solid	Metal	0.02
111	1924 Bldg.	18	XRF	4/4/97	4	Outside	320		Downspou	Solid	Metal	0

Saint Paul Public Schools
Farnsworth Outcome Based Education Magnet School
Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
3	Site	Sample #	Analysis	Date	Floor	Area	Room#	Component	Feature	Condition	Substrate	Result
112	1924 Bldg.	19	XRF	4/4/97	4	Outside	320		Hand rail	Solid	Wood	0.02
113	1924 Bldg.	20	XRF	4/4/97	4	Outside	320	Door	Door	Solid	Metal	0.03
114	1924 Bldg.	21	XRF	4/4/97	4	Outside	320	Wall	Midle Wall	Solid	Concrte	0.35
115	1924 Bldg.	22	XRF	4/4/97	4	Outside	320	Floor		Chalking	Concrte	0.1
116	1924 Bldg.	23	XRF	4/4/97	4	Outside	320	Door	Door	Solid	Wood	0.38
117	1924 Bldg.	24	XRF	4/4/97	4	Outside	320	Door	Casing	Solid	Metal	0.4
118	1924 Bldg.	25	XRF	4/4/97	4	Outside	320	Stairs	Hand rail	Solid	Metal	1.07
119	1924 Bldg.	46	XRF	4/6/97	1	Room	5	Ceiling		Solid	Drywall	0
120	1924 Bldg.	63	XRF	4/6/97	0	Room	60	Door	Door	Cracked	Metal	0.28
121	1924 Bldg.	64	XRF	4/6/97	0	Room	60	Door	Casing	Cracked	Metal	0.36
122	1924 Bldg.	65	XRF	4/6/97	0	Room	60	Wall	Midle Wall	Solid	Concrte	0.01
123	1924 Bldg.	66	XRF	4/6/97	0	Room	60	Stairs	Hand rail	Peeling	Metal	0.06
124	1924 Bldg.	67	XRF	4/6/97	0	Room	60	Floor		Cracked	Concrte	0.01
125	1924 Bldg.	61	XRF	4/6/97	0	Room	70	Door		Solid	Metal	0.25
126	1924 Bldg.	50	XRF	4/6/97	1	Room	102	Ceiling		Solid	Drywall	0
127	1924 Bldg.	51	XRF	4/6/97	1	Room	105	Ceiling		Solid	Plaster	0.04
128	1924 Bldg.	45	XRF	4/6/97	1	Room	115	Ceiling		Solid	Plaster	0.04
129	1924 Bldg.	58	XRF	4/6/97	1	Room	138	Ceiling		Solid	Drywall	0
130	1924 Bldg.	276	XRF	4/4/97	2	Room	202	Window	Casing	Solid	Metal	0
131	1924 Bldg.	277	XRF	4/4/97	2	Room	202		Radiator	Solid	Metal	0
132	1924 Bldg.	278	XRF	4/4/97	2	Room	202	Wall	Midle Wall	Solid	Drywall	0
133	1924 Bldg.	279	XRF	4/4/97	2	Room	202	Bulletin	Board	Solid	Wood	0.14
134	1924 Bldg.	280	XRF	4/4/97	2	Room	202	Door	Door	Solid	Wood	0
135	1924 Bldg.	281	XRF	4/4/97	2	Room	202	Door	Casing	Solid	Metal	0
136	1924 Bldg.	282	XRF	4/4/97	2	Room	202	Cabinet	Door	Solid	Wood	0.05
137	1924 Bldg.	283	XRF	4/4/97	2	Room	202	Wall	Wall	Solid	Concrte	5.09
138	1924 Bldg.	41	XRF	4/6/97	2	Room	202	Ceiling		Solid	Plaster	0.06
139	1924 Bldg.	268	XRF	4/4/97	2	Room	203	Window	Casing	Solid	Metal	0
140	1924 Bldg.	269	XRF	4/4/97	2	Room	203		Radiator	Solid	Metal	0
141	1924 Bldg.	270	XRF	4/4/97	2	Room	203	Wall	Midle Wall	Solid	Drywall	0
142	1924 Bldg.	271	XRF	4/4/97	2	Room	203	Bulletin	Board	Solid	Wood	0.16
143	1924 Bldg.	272	XRF	4/4/97	2	Room	203	Door	Door	Solid	Wood	0
144	1924 Bldg.	273	XRF	4/4/97	2	Room	203	Door	Casing	Solid	Metal	0
145	1924 Bldg.	274	XRF	4/4/97	2	Room	203	Cabinet	Door	Solid	Wood	0.07
146	1924 Bldg.	275	XRF	4/4/97	2	Room	203	Wall	Wall	Solid	Concrte	5.09
147	1924 Bldg.	40	XRF	4/6/97	2	Room	203	Ceiling		Solid	Plaster	0.02
148	1924 Bldg.	260	XRF	4/4/97	2	Room	204	Window	Casing	Solid	Metal	0
149	1924 Bldg.	261	XRF	4/4/97	2	Room	204		Radiator	Solid	Metal	0
150	1924 Bldg.	262	XRF	4/4/97	2	Room	204	Wall	Midle Wall	Solid	Drywall	0
151	1924 Bldg.	263	XRF	4/4/97	2	Room	204	Bulletin	Board	Solid	Wood	0.22
152	1924 Bldg.	264	XRF	4/4/97	2	Room	204	Wall	Baseboar	Solid	Wood	0.11
153	1924 Bldg.	265	XRF	4/4/97	2	Room	204	Door	Door	Solid	Wood	0
154	1924 Bldg.	266	XRF	4/4/97	2	Room	204	Door	Casing	Solid	Metal	0
155	1924 Bldg.	267	XRF	4/4/97	2	Room	204	Wall	Wall	Solid	Concrte	5.09
156	1924 Bldg.	37	XRF	4/6/97	2	Room	204	Ceiling		Solid	Plaster	0.05
157	1924 Bldg.	235	XRF	4/4/97	2	Room	205	Window	Casing	Solid	Metal	0
158	1924 Bldg.	236	XRF	4/4/97	2	Room	205		Radiator	Solid	Metal	0
159	1924 Bldg.	237	XRF	4/4/97	2	Room	205	Wall	Midle Wall	Solid	Drywall	0.11
160	1924 Bldg.	238	XRF	4/4/97	2	Room	205	Door	Door	Solid	Wood	0
161	1924 Bldg.	239	XRF	4/4/97	2	Room	205	Door	Casing	Solid	Metal	0
162	1924 Bldg.	240	XRF	4/4/97	2	Room	205	Wall	Wall	Solid	Concrte	0.1
163	1924 Bldg.	241	XRF	4/4/97	2	Room	205	Wire Tray		Solid	Metal	0.03
164	1924 Bldg.	242	XRF	4/4/97	2	Room	205	Wall	Baseboar	Solid	Wood	4.2
165	1924 Bldg.	224	XRF	4/4/97	2	Room	206	Wall	Midle Wall	Solid	Plaster	0
166	1924 Bldg.	225	XRF	4/4/97	2	Room	206	Door	Door	Solid	Wood	0

Saint Paul Public Schools
Farnsworth Outcome Based Education Magnet School
Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
3	Site	Sample #	Analysis	Date	Floor	Area	Room#	Component	Feature	Condition	Substrate	Result
167	1924 Bldg.	226	XRF	4/4/97	2	Room	206	Door	Casing	Solid	Metal	0
168	1924 Bldg.	227	XRF	4/4/97	2	Room	206	Floor		Solid	Wood	0
169	1924 Bldg.	243	XRF	4/4/97	2	Room	206	Window	Casing	Solid	Metal	0
170	1924 Bldg.	244	XRF	4/4/97	2	Room	206		Radiator	Solid	Metal	0
171	1924 Bldg.	245	XRF	4/4/97	2	Room	206	Wall	Midle Wall	Solid	Concrte	0.03
172	1924 Bldg.	246	XRF	4/4/97	2	Room	206	Door	Door	Solid	Wood	0.04
173	1924 Bldg.	247	XRF	4/4/97	2	Room	206	Door	Casing	Solid	Metal	0.01
174	1924 Bldg.	35	XRF	4/6/97	2	Room	206	Ceiling		Solid	Plaster	0.03
175	1924 Bldg.	218	XRF	4/4/97	2	Room	207	Wall	Midle Wall	Solid	Concrte	0
176	1924 Bldg.	219	XRF	4/4/97	2	Room	207	Window	Casing	Solid	Metal	0
177	1924 Bldg.	220	XRF	4/4/97	2	Room	207		Radiator	Solid	Metal	0
178	1924 Bldg.	221	XRF	4/4/97	2	Room	207	Door	Door	Solid	Wood	0
179	1924 Bldg.	222	XRF	4/4/97	2	Room	207	Door	Casing	Solid	Metal	0
180	1924 Bldg.	223	XRF	4/4/97	2	Room	207	Wall	Wall	Solid	Drywall	0.03
181	1924 Bldg.	206	XRF	4/4/97	2	Room	211	Door	Door	Solid	Wood	0
182	1924 Bldg.	207	XRF	4/4/97	2	Room	211	Door	Casing	Solid	Metal	0.01
183	1924 Bldg.	208	XRF	4/4/97	2	Room	211	Window	Casing	Solid	Metal	0
184	1924 Bldg.	209	XRF	4/4/97	2	Room	211		Radiator	Solid	Metal	0
185	1924 Bldg.	210	XRF	4/4/97	2	Room	211	Wall	Midle Wall	Solid	Drywall	0.01
186	1924 Bldg.	211	XRF	4/4/97	2	Room	211	Wall	Midle Wall	Solid	Concrte	0.02
187	1924 Bldg.	212	XRF	4/4/97	2	Room	212	Wall	Midle Wall	Solid	Concrte	0.07
188	1924 Bldg.	213	XRF	4/4/97	2	Room	212		Radiator	Solid	Metal	0.03
189	1924 Bldg.	214	XRF	4/4/97	2	Room	212	Mural		Solid	Concrte	0.02
190	1924 Bldg.	215	XRF	4/4/97	2	Room	212	Mural		Solid	Concrte	0.01
191	1924 Bldg.	216	XRF	4/4/97	2	Room	212	Door	Door	Solid	Wood	0
192	1924 Bldg.	217	XRF	4/4/97	2	Room	212	Door	Casing	Solid	Metal	0.01
193	1924 Bldg.	228	XRF	4/4/97	2	Room	213	Door	Door	Solid	Wood	0.01
194	1924 Bldg.	229	XRF	4/4/97	2	Room	213	Door	Casing	Solid	Metal	0
195	1924 Bldg.	230	XRF	4/4/97	2	Room	213	Cabinet	Door	Solid	Wood	0.12
196	1924 Bldg.	231	XRF	4/4/97	2	Room	213	Bulletin	Board	Solid	Wood	0.07
197	1924 Bldg.	232	XRF	4/4/97	2	Room	213	Wall	Midle Wall	Solid	Drywall	0.02
198	1924 Bldg.	233	XRF	4/4/97	2	Room	213	Wall	Wall	Solid	Concrte	0.05
199	1924 Bldg.	234	XRF	4/4/97	2	Room	213	Cork	Board	Solid	Stucco	0.28
200	1924 Bldg.	34	XRF	4/6/97	2	Room	213	Ceiling		Solid	Plaster	0.03
201	1924 Bldg.	248	XRF	4/4/97	2	Room	214	Wall	Midle Wall	Solid	Concrte	0
202	1924 Bldg.	249	XRF	4/4/97	2	Room	214	Wall	Midle Wall	Solid	Concrte	0.05
203	1924 Bldg.	250	XRF	4/4/97	2	Room	214	Wall	Midle Wall	Solid	Concrte	0
204	1924 Bldg.	251	XRF	4/4/97	2	Room	214	Door	Door	Solid	Wood	0
205	1924 Bldg.	252	XRF	4/4/97	2	Room	214	Door	Casing	Solid	Metal	0.02
206	1924 Bldg.	188	XRF	4/4/97	2	Room	215	Door	Door	Solid	Wood	0
207	1924 Bldg.	189	XRF	4/4/97	2	Room	215	Door	Casing	Solid	Metal	0
208	1924 Bldg.	190	XRF	4/4/97	2	Room	215	Door	Door	Solid	Metal	0
209	1924 Bldg.	191	XRF	4/4/97	2	Room	215	Door	Casing	Solid	Metal	0
210	1924 Bldg.	192	XRF	4/4/97	2	Room	215	Wall	Midle Wall	Solid	Concrte	0
211	1924 Bldg.	36	XRF	4/6/97	2	Room	215	Ceiling		Solid	Drywall	0
212	1924 Bldg.	253	XRF	4/4/97	2	Room	216	Door	Door	Solid	Wood	0
213	1924 Bldg.	254	XRF	4/4/97	2	Room	216	Door	Casing	Solid	Metal	0
214	1924 Bldg.	255	XRF	4/4/97	2	Room	216	Wall	Midle Wall	Solid	Concrte	0.01
215	1924 Bldg.	256	XRF	4/4/97	2	Room	216	Stairs	Hand rail	Solid	Metal	0.02
216	1924 Bldg.	257	XRF	4/4/97	2	Room	216	Wall	Midle Wall	Solid	Concrte	0.01
217	1924 Bldg.	258	XRF	4/4/97	2	Room	216	Door	Door	Solid	Wood	0
218	1924 Bldg.	259	XRF	4/4/97	2	Room	216	Door	Casing	Solid	Metal	0
219	1924 Bldg.	291	XRF	4/4/97	2	Room	223	Door	Door	Solid	Wood	0
220	1924 Bldg.	292	XRF	4/4/97	2	Room	223	Door	Casing	Solid	Metal	0
221	1924 Bldg.	293	XRF	4/4/97	2	Room	223	Cabinet	Door	Solid	Wood	0.06

Saint Paul Public Schools
Farnsworth Outcome Based Education Magnet School
Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
3	Site	Sample #	Analysis	Date	Floor	Area	Room#	Component	Feature	Condition	Substrate	Result
222	1924 Bldg.	294	XRF	4/4/97	2	Room	223	Wall	Wall	Solid	Concrte	5.09
223	1924 Bldg.	295	XRF	4/4/97	2	Room	223	Window	Casing	Solid	Metal	0.01
224	1924 Bldg.	296	XRF	4/4/97	2	Room	223		Radiator	Solid	Metal	0
225	1924 Bldg.	297	XRF	4/4/97	2	Room	223	Wall	Midle Wall	Solid	Drywall	0
226	1924 Bldg.	298	XRF	4/4/97	2	Room	223	Bulletin	Board	Solid	Wood	0.13
227	1924 Bldg.	299	XRF	4/4/97	2	Room	223	Floor		Solid	Wood	0.01
228	1924 Bldg.	300	XRF	4/4/97	2	Room	223	Wall	Midle Wall	Solid	Plaster	0.01
229	1924 Bldg.	42	XRF	4/6/97	2	Room	223	Ceiling		Solid	Plaster	0.08
230	1924 Bldg.	43	XRF	4/6/97	2	Room	223	Ceiling		Solid	Plaster	0.05
231	1924 Bldg.	284	XRF	4/4/97	2	Room	224	Door	Door	Solid	Wood	0
232	1924 Bldg.	285	XRF	4/4/97	2	Room	224	Door	Casing	Solid	Metal	0
233	1924 Bldg.	286	XRF	4/4/97	2	Room	224	Wall	Crown mol	Solid	Wood	0.08
234	1924 Bldg.	287	XRF	4/4/97	2	Room	224	Wall	Midle Wall	Solid	Plaster	0
235	1924 Bldg.	288	XRF	4/4/97	2	Room	224	Window	Casing	Solid	Metal	0
236	1924 Bldg.	289	XRF	4/4/97	2	Room	224		Radiator	Solid	Metal	0.01
237	1924 Bldg.	290	XRF	4/4/97	2	Room	224	Wall	Midle Wall	Solid	Concrte	0.02
238	1924 Bldg.	44	XRF	4/6/97	2	Room	224	Ceiling		Solid	Plaster	0.02
239	1924 Bldg.	35	XRF	4/4/97	3	Room	303	Window	Casing	Solid	Metal	0
240	1924 Bldg.	36	XRF	4/4/97	3	Room	303		Radiator	Solid	Metal	0
241	1924 Bldg.	37	XRF	4/4/97	3	Room	303	Chalk	Board	Solid	Wood	0.29
242	1924 Bldg.	38	XRF	4/4/97	3	Room	303	Wall	Midle Wall	Solid	Concrte	5.09
243	1924 Bldg.	39	XRF	4/4/97	3	Room	303	Door	Door	Solid	Wood	0
244	1924 Bldg.	40	XRF	4/4/97	3	Room	303	Door	Casing	Solid	Metal	0
245	1924 Bldg.	41	XRF	4/4/97	3	Room	303	Cabinet	Door	Solid	Wood	0.07
246	1924 Bldg.	42	XRF	4/4/97	3	Room	303	Wall	Wall	Solid	Concrte	5.09
247	1924 Bldg.	19	XRF	4/6/97	3	Room	303	Ceiling		Solid	Plaster	0.01
248	1924 Bldg.	20	XRF	4/6/97	3	Room	303	Ceiling		Solid	Plaster	0.04
249	1924 Bldg.	51	XRF	4/4/97	3	Room	304	Window	Casing	Solid	Metal	0
250	1924 Bldg.	52	XRF	4/4/97	3	Room	304		Radiator	Solid	Metal	0.01
251	1924 Bldg.	53	XRF	4/4/97	3	Room	304	Bulletin	Board	Solid	Wood	0.34
252	1924 Bldg.	54	XRF	4/4/97	3	Room	304	Door	Door	Solid	Wood	0
253	1924 Bldg.	55	XRF	4/4/97	3	Room	304	Door	Casing	Solid	Metal	0
254	1924 Bldg.	56	XRF	4/4/97	3	Room	304	Cabinet	Door	Solid	Wood	0.05
255	1924 Bldg.	57	XRF	4/4/97	3	Room	304	Wall	Wall	Solid	Concrte	5.09
256	1924 Bldg.	22	XRF	4/6/97	3	Room	304	Ceiling		Cracked	Plaster	0.03
257	1924 Bldg.	23	XRF	4/6/97	3	Room	304	Ceiling		Cracked	Drywall	0.07
258	1924 Bldg.	58	XRF	4/4/97	3	Room	305	Window	Casing	Solid	Metal	0
259	1924 Bldg.	59	XRF	4/4/97	3	Room	305		Radiator	Solid	Metal	0
260	1924 Bldg.	60	XRF	4/4/97	3	Room	305	Chalk	Board	Solid	Wood	0.35
261	1924 Bldg.	61	XRF	4/4/97	3	Room	305	Wall	Wall	Solid	Metal	0.02
262	1924 Bldg.	62	XRF	4/4/97	3	Room	305	Door	Door	Solid	Wood	0
263	1924 Bldg.	63	XRF	4/4/97	3	Room	305	Door	Casing	Solid	Metal	0.01
264	1924 Bldg.	64	XRF	4/4/97	3	Room	305	Cabinet	Door	Solid	Wood	0.06
265	1924 Bldg.	65	XRF	4/4/97	3	Room	305	Wall	Wall	Solid	Concrte	5.09
266	1924 Bldg.	26	XRF	4/6/97	3	Room	305	Ceiling		Solid	Plaster	0.22
267	1924 Bldg.	66	XRF	4/4/97	3	Room	306	Window	Casing	Solid	Metal	0.02
268	1924 Bldg.	67	XRF	4/4/97	3	Room	306		Radiator	Solid	Metal	0
269	1924 Bldg.	68	XRF	4/4/97	3	Room	306	Wall	Wall	Solid	Metal	0
270	1924 Bldg.	69	XRF	4/4/97	3	Room	306	Wall	Midle Wall	Solid	Drywall	0.02
271	1924 Bldg.	70	XRF	4/4/97	3	Room	306	Door	Door	Solid	Wood	0
272	1924 Bldg.	71	XRF	4/4/97	3	Room	306	Door	Casing	Solid	Metal	0.02
273	1924 Bldg.	72	XRF	4/4/97	3	Room	306	Wall	Midle Wall	Solid	Concrte	5.09
274	1924 Bldg.	73	XRF	4/4/97	3	Room	306	Wall	Chair rail	Solid	Wood	3.56
275	1924 Bldg.	74	XRF	4/4/97	3	Room	306	Door	Door	Solid	Wood	0
276	1924 Bldg.	75	XRF	4/4/97	3	Room	307	Window	Casing	Solid	Metal	0

Saint Paul Public Schools
Farnsworth Outcome Based Education Magnet School
Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
3	Site	Sample #	Analysis	Date	Floor	Area	Room#	Component	Feature	Condition	Substrate	Result
277	1924 Bldg.	76	XRF	4/4/97	3	Room	307		Radiator	Solid	Metal	0.01
278	1924 Bldg.	77	XRF	4/4/97	3	Room	307	Bulletin	Board	Solid	Wood	0.41
279	1924 Bldg.	78	XRF	4/4/97	3	Room	307	Door	Door	Solid	Wood	0
280	1924 Bldg.	79	XRF	4/4/97	3	Room	307	Door	Casing	Solid	Metal	0
281	1924 Bldg.	80	XRF	4/4/97	3	Room	307	Cabinet	Door	Solid	Wood	0.09
282	1924 Bldg.	81	XRF	4/4/97	3	Room	307	Wall	Wall	Solid	Concrte	5.09
283	1924 Bldg.	27	XRF	4/6/97	3	Room	307	Ceiling		Solid	Plaster	0.22
284	1924 Bldg.	96	XRF	4/4/97	3	Room	308	Window	Casing	Solid	Metal	0
285	1924 Bldg.	97	XRF	4/4/97	3	Room	308		Radiator	Solid	Metal	0.01
286	1924 Bldg.	98	XRF	4/4/97	3	Room	308	Wall	Midle Wall	Solid	Concrte	5.09
287	1924 Bldg.	99	XRF	4/4/97	3	Room	308	Wall	Chair rail	Solid	Wood	0.13
288	1924 Bldg.	100	XRF	4/4/97	3	Room	308	Wall	Midle Wall	Solid	Drywall	0.01
289	1924 Bldg.	101	XRF	4/4/97	3	Room	308	Door	Door	Solid	Wood	0
290	1924 Bldg.	102	XRF	4/4/97	3	Room	308	Door	Casing	Solid	Metal	0
291	1924 Bldg.	111	XRF	4/4/97	3	Room	309	Window	Casing	Solid	Metal	0.02
292	1924 Bldg.	112	XRF	4/4/97	3	Room	309		Radiator	Solid	Metal	0.02
293	1924 Bldg.	113	XRF	4/4/97	3	Room	309		Chair rail	Solid	Wood	0.14
294	1924 Bldg.	114	XRF	4/4/97	3	Room	309	Wall	Wall	Solid	Concrte	5.09
295	1924 Bldg.	115	XRF	4/4/97	3	Room	309	Wall	Baseboar	Solid	Wood	0.19
296	1924 Bldg.	116	XRF	4/4/97	3	Room	309	Wall	Midle Wall	Solid	Drywall	0
297	1924 Bldg.	117	XRF	4/4/97	3	Room	309	Door	Door	Solid	Wood	0
298	1924 Bldg.	118	XRF	4/4/97	3	Room	309	Door	Casing	Solid	Metal	0
299	1924 Bldg.	103	XRF	4/4/97	3	Room	316	Door	Door	Solid	Wood	0
300	1924 Bldg.	104	XRF	4/4/97	3	Room	316	Door	Casing	Solid	Metal	0
301	1924 Bldg.	105	XRF	4/4/97	3	Room	316	Wall	Midle Wall	Solid	Drywall	0
302	1924 Bldg.	106	XRF	4/4/97	3	Room	316	Wall	Wall	Solid	Concrte	0
303	1924 Bldg.	107	XRF	4/4/97	3	Room	316	Window	Casing	Solid	Metal	0.01
304	1924 Bldg.	108	XRF	4/4/97	3	Room	316		Radiator	Solid	Metal	0
305	1924 Bldg.	109	XRF	4/4/97	3	Room	316	Wall	Wall	Solid	Concrte	5.09
306	1924 Bldg.	110	XRF	4/4/97	3	Room	316	Wall	Baseboar	Solid	Wood	0.13
307	1924 Bldg.	135	XRF	4/4/97	3	Room	317	Door	Door	Solid	Wood	0
308	1924 Bldg.	136	XRF	4/4/97	3	Room	317	Door	Casing	Solid	Metal	0.01
309	1924 Bldg.	137	XRF	4/4/97	3	Room	317	Door	Door	Solid	Metal	0.01
310	1924 Bldg.	138	XRF	4/4/97	3	Room	317	Door	Casing	Solid	Metal	0
311	1924 Bldg.	28	XRF	4/6/97	3	Room	317	Ceiling		Solid	Drywall	0.01
312	1924 Bldg.	82	XRF	4/4/97	3	Room	318	Door	Door	Solid	Wood	0
313	1924 Bldg.	83	XRF	4/4/97	3	Room	318	Door	Casing	Solid	Metal	0.01
314	1924 Bldg.	84	XRF	4/4/97	3	Room	318		Radiator	Solid	Metal	0
315	1924 Bldg.	85	XRF	4/4/97	3	Room	318	Wall	Midle Wall	Solid	Concrte	0
316	1924 Bldg.	86	XRF	4/4/97	3	Room	318	Window	Casing	Solid	Metal	0
317	1924 Bldg.	87	XRF	4/4/97	3	Room	318	Wall	Midle Wall	Solid	Drywall	0
318	1924 Bldg.	88	XRF	4/4/97	3	Room	319	Wall	Midle Wall	Solid	Brick	0.03
319	1924 Bldg.	89	XRF	4/4/97	3	Room	319	Wall	Midle Wall	Solid	Concrte	0
320	1924 Bldg.	90	XRF	4/4/97	3	Room	319		Radiator	Solid	Metal	0
321	1924 Bldg.	91	XRF	4/4/97	3	Room	319	Door	Door	Solid	Wood	0
322	1924 Bldg.	92	XRF	4/4/97	3	Room	319	Door	Casing	Solid	Metal	0.01
323	1924 Bldg.	43	XRF	4/4/97	3	Room	326	Door	Door	Solid	Wood	0
324	1924 Bldg.	44	XRF	4/4/97	3	Room	326	Door	Casing	Solid	Metal	0
325	1924 Bldg.	45	XRF	4/4/97	3	Room	326	Cabinet	Door	Solid	Wood	0.07
326	1924 Bldg.	46	XRF	4/4/97	3	Room	326	Bulletin	Board	Solid	Wood	0.09
327	1924 Bldg.	47	XRF	4/4/97	3	Room	326	Wire Tray		Solid	Metal	0.02
328	1924 Bldg.	48	XRF	4/4/97	3	Room	326	Window	Casing	Solid	Metal	0
329	1924 Bldg.	49	XRF	4/4/97	3	Room	326		Radiator	Solid	Metal	0
330	1924 Bldg.	50	XRF	4/4/97	3	Room	326	Wall	Midle Wall	Solid	Drywall	0.03
331	1924 Bldg.	21	XRF	4/6/97	3	Room	326	Ceiling		Solid	Plaster	0.03

Saint Paul Public Schools
Farnsworth Outcome Based Education Magnet School
Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
3	Site	Sample #	Analysis	Date	Floor	Area	Room#	Component	Feature	Condition	Substrate	Result
332	1924 Bldg.	26	XRF	4/4/97	3	Room	327	Door	Door	Solid	Wood	0
333	1924 Bldg.	27	XRF	4/4/97	3	Room	327	Door	Casing	Solid	Metal	0
334	1924 Bldg.	28	XRF	4/4/97	3	Room	327	Wall	Crown mol	Solid	Wood	0.11
335	1924 Bldg.	29	XRF	4/4/97	3	Room	327	Cabinet	Door	Solid	Wood	0.06
336	1924 Bldg.	30	XRF	4/4/97	3	Room	327	Cabinet	Door	Solid	Wood	0.07
337	1924 Bldg.	31	XRF	4/4/97	3	Room	327	Wall	Midle Wall	Solid	Drywall	0.1
338	1924 Bldg.	32	XRF	4/4/97	3	Room	327	Window	Casing	Solid	Metal	0
339	1924 Bldg.	33	XRF	4/4/97	3	Room	327		Radiator	Solid	Metal	0
340	1924 Bldg.	34	XRF	4/4/97	3	Room	327	Bulletin	Board	Solid	Wood	0.11
341	1924 Bldg.	18	XRF	4/6/97	3	Room	327	Ceiling		Solid	Plaster	0.02
342	1924 Bldg.	30	XRF	4/6/97	3	Stairwell	301	Ceiling		Solid	Plaster	0.05
343	1924 Bldg.	32	XRF	4/6/97	3	Stairwell	313	Ceiling		Solid	Drywall	0.03
344	1924 Bldg.	31	XRF	4/6/97	3	Stairwell	320	Ceiling		Solid	Plaster	0.08
345	1964 Bldg.	142	XRF	4/5/97	1	Bath	3	Door	Door	Solid	Wood	0
346	1964 Bldg.	143	XRF	4/5/97	1	Bath	3	Door	Casing	Solid	Metal	0.01
347	1964 Bldg.	144	XRF	4/5/97	1	Bath	3		Radiator	Solid	Metal	0.01
348	1964 Bldg.	47	XRF	4/6/97	1	Bath	3	Ceiling		Solid	Drywall	5.09
349	1964 Bldg.	48	XRF	4/6/97	1	Bath	3	Ceiling		Solid	Concrte	5.09
350	1964 Bldg.	145	XRF	4/5/97	1	Bath	4		Radiator	Solid	Metal	0
351	1964 Bldg.	146	XRF	4/5/97	1	Bath	4	Door	Door	Solid	Wood	0
352	1964 Bldg.	147	XRF	4/5/97	1	Bath	4	Door	Casing	Solid	Metal	0
353	1964 Bldg.	204	XRF	4/5/97	1	Bath	131	Door	Door	Solid	Wood	0
354	1964 Bldg.	205	XRF	4/5/97	1	Bath	131	Door	Casing	Solid	Metal	0.02
355	1964 Bldg.	206	XRF	4/5/97	1	Bath	131		Radiator	Solid	Metal	0
356	1964 Bldg.	207	XRF	4/5/97	1	Bath	131	Wall	Midle Wall	Solid	Concrte	0.03
357	1964 Bldg.	59	XRF	4/6/97	1	Bath	131	Ceiling		Solid	Drywall	0
358	1964 Bldg.	170	XRF	4/5/97	1	Bath	137	Wall	Midle Wall	Solid	Concrte	0
359	1964 Bldg.	171	XRF	4/5/97	1	Bath	137		Radiator	Solid	Metal	0
360	1964 Bldg.	172	XRF	4/5/97	1	Bath	137	Door	Door	Solid	Wood	0
361	1964 Bldg.	173	XRF	4/5/97	1	Bath	137	Door	Casing	Solid	Metal	0.01
362	1964 Bldg.	183	XRF	4/5/97	1	Gym	133	Wall	Midle Wall	Solid	Concrte	0.06
363	1964 Bldg.	184	XRF	4/5/97	1	Gym	133	Door	Door	Solid	Wood	0
364	1964 Bldg.	185	XRF	4/5/97	1	Gym	133	Door	Casing	Solid	Metal	0
365	1964 Bldg.	186	XRF	4/5/97	1	Gym	133	Door	Door	Solid	Metal	0.01
366	1964 Bldg.	187	XRF	4/5/97	1	Gym	133	Wall	Wall Rgstr	Solid	Metal	0
367	1964 Bldg.	188	XRF	4/5/97	1	Gym	133	Floor	Stripes	Solid	Tile	0
368	1964 Bldg.	189	XRF	4/5/97	1	Gym	133	Floor	Stripes	Solid	Tile	0
369	1964 Bldg.	190	XRF	4/5/97	1	Gym	133	Floor	Stripes	Solid	Tile	0.02
370	1964 Bldg.	191	XRF	4/5/97	1	Gym	133	Floor	Stripes	Solid	Tile	0
371	1964 Bldg.	60	XRF	4/6/97	1	Gym	133	Ceiling		Solid	Drywall	0
372	1964 Bldg.	56	XRF	4/6/97	1	Hall	102	Ceiling		Solid	Drywall	0.07
373	1964 Bldg.	217	XRF	4/5/97	1	Hall	114	Door	Door	Solid	Metal	0
374	1964 Bldg.	218	XRF	4/5/97	1	Hall	114	Door	Casing	Solid	Metal	0.01
375	1964 Bldg.	219	XRF	4/5/97	1	Hall	114	Wall	Midle Wall	Solid	Concrte	0.04
376	1964 Bldg.	220	XRF	4/5/97	1	Hall	114	Wall	Midle Wall	Solid	Drywall	0
377	1964 Bldg.	221	XRF	4/5/97	1	Hall	135	Door	Door	Solid	Wood	0
378	1964 Bldg.	222	XRF	4/5/97	1	Hall	135	Wall	Midle Wall	Solid	Concrte	0
379	1964 Bldg.	223	XRF	4/5/97	1	Hall	135	Door	Door	Solid	Wood	0
380	1964 Bldg.	224	XRF	4/5/97	1	Hall	135	Door	Casing	Solid	Metal	0
381	1964 Bldg.	225	XRF	4/5/97	1	Hall	135	Locker		Solid	Metal	0.06
382	1964 Bldg.	226	XRF	4/5/97	1	Hall	135	Mural		Solid	Metal	0
383	1964 Bldg.	227	XRF	4/5/97	1	Hall	135	Mural		Solid	Metal	0
384	1964 Bldg.	228	XRF	4/5/97	1	Hall	135	Mural		Solid	Metal	0
385	1964 Bldg.	229	XRF	4/5/97	1	Hall	135	Mural		Solid	Metal	0
386	1964 Bldg.	230	XRF	4/5/97	1	Hall	135	Door	Door	Solid	Metal	0.1

Saint Paul Public Schools
Farnsworth Outcome Based Education Magnet School
Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
3	Site	Sample #	Analysis	Date	Floor	Area	Room#	Component	Feature	Condition	Substrate	Result
387	1964 Bldg.	231	XRF	4/5/97	1	Hall	135	Door	Casing	Solid	Metal	0
388	1964 Bldg.	232	XRF	4/5/97	1	Hall	135		Radiator	Solid	Metal	0
389	1964 Bldg.	132	XRF	4/5/97	1	Hall	102A	Wall	Midle Wall	Solid	Drywall	0.03
390	1964 Bldg.	133	XRF	4/5/97	1	Hall	102A		Chair rail	Solid	Wood	0.06
391	1964 Bldg.	134	XRF	4/5/97	1	Hall	102A	Locker		Solid	Metal	0.11
392	1964 Bldg.	135	XRF	4/5/97	1	Hall	102A	Wall	Wall	Solid	Plaster	0.1
393	1964 Bldg.	136	XRF	4/5/97	1	Hall	102A	Wall	Midle Wall	Solid	Concrte	0.02
394	1964 Bldg.	137	XRF	4/5/97	1	Hall	102A	Door	Door	Solid	Metal	0.01
395	1964 Bldg.	138	XRF	4/5/97	1	Hall	102A	Door	Casing	Solid	Metal	0
396	1964 Bldg.	139	XRF	4/5/97	1	Hall	102A	Wall	Midle Wall	Solid	Concrte	0.03
397	1964 Bldg.	140	XRF	4/5/97	1	Hall	102A		Elec Panel	Solid	Metal	0.01
398	1964 Bldg.	141	XRF	4/5/97	1	Hall	102A	Wall	Midle Wall	Solid	Drywall	0.02
399	1964 Bldg.	148	XRF	4/5/97	1	Hall	102A	Door	Door	Solid	Wood	0
400	1964 Bldg.	149	XRF	4/5/97	1	Hall	102A	Door	Casing	Solid	Metal	0
401	1964 Bldg.	150	XRF	4/5/97	1	Hall	102A	Wall	Midle Wall	Solid	Drywall	0.06
402	1964 Bldg.	151	XRF	4/5/97	1	Hall	102A		Radiator	Solid	Metal	0.06
403	1964 Bldg.	199	XRF	4/5/97	1	Hall	131B	Stairs	Hand rail	Solid	Metal	0.01
404	1964 Bldg.	200	XRF	4/5/97	1	Hall	131B	Wall	Midle Wall	Solid	Concrte	0.01
405	1964 Bldg.	201	XRF	4/5/97	1	Hall	131B	Door	Door	Solid	Wood	0
406	1964 Bldg.	202	XRF	4/5/97	1	Hall	131B	Door	Casing	Solid	Metal	0
407	1964 Bldg.	203	XRF	4/5/97	1	Hall	131B	Door	Door	Solid	Metal	0
408	1964 Bldg.	167	XRF	4/5/97	1	Kitchen	143	Wall	Midle Wall	Solid	Concrte	0
409	1964 Bldg.	168	XRF	4/5/97	1	Kitchen	143	Door	Door	Solid	Wood	0
410	1964 Bldg.	169	XRF	4/5/97	1	Kitchen	143	Door	Casing	Solid	Metal	0.02
411	1964 Bldg.	182	XRF	4/5/97	1	Kitchen	144	Wall	Midle Wall	Solid	Concrte	0.01
412	1964 Bldg.	86	XRF	4/5/97	1	Room	5	Door	Door	Solid	Wood	0
413	1964 Bldg.	87	XRF	4/5/97	1	Room	5	Door	Casing	Solid	Metal	0
414	1964 Bldg.	88	XRF	4/5/97	1	Room	5	Wall	Midle Wall	Solid	Concrte	0
415	1964 Bldg.	89	XRF	4/5/97	1	Room	5	Door	Door	Solid	Metal	0.01
416	1964 Bldg.	90	XRF	4/5/97	1	Room	5	Door	Casing	Solid	Metal	0.01
417	1964 Bldg.	62	XRF	4/6/97	0	Room	70	Door	Casing	Solid	Metal	0.29
418	1964 Bldg.	51	XRF	4/5/97	1	Room	100	Door	Door	Solid	Wood	0
419	1964 Bldg.	52	XRF	4/5/97	1	Room	100	Door	Casing	Solid	Metal	0
420	1964 Bldg.	53	XRF	4/5/97	1	Room	100	Wall	Midle Wall	Solid	Drywall	0
421	1964 Bldg.	54	XRF	4/5/97	1	Room	100	Wall	Midle Wall	Solid	Concrte	0.07
422	1964 Bldg.	55	XRF	4/5/97	1	Room	100	Stairs	Hand rail	Solid	Metal	0
423	1964 Bldg.	56	XRF	4/5/97	1	Room	100	Wall	Baseboar	Solid	Wood	0.16
424	1964 Bldg.	57	XRF	4/5/97	1	Room	100	Window	Casing	Solid	Metal	0
425	1964 Bldg.	58	XRF	4/5/97	1	Room	100		Radiator	Solid	Metal	0
426	1964 Bldg.	59	XRF	4/5/97	1	Room	100		Radiator	Solid	Drywall	0.01
427	1964 Bldg.	60	XRF	4/5/97	1	Room	100	Wall	Wall	Solid	Plaster	0.02
428	1964 Bldg.	61	XRF	4/5/97	1	Room	100	Wall	Midle Wall	Solid	Concrte	0.13
429	1964 Bldg.	62	XRF	4/5/97	1	Room	100	Door	Door	Solid	Wood	0
430	1964 Bldg.	63	XRF	4/5/97	1	Room	100	Door	Casing	Solid	Metal	0
431	1964 Bldg.	6	XRF	4/5/97	1	Room	103	Window	Casing	Solid	Metal	0
432	1964 Bldg.	7	XRF	4/5/97	1	Room	103		Radiator	Solid	Metal	0
433	1964 Bldg.	8	XRF	4/5/97	1	Room	103	Wall	Midle Wall	Solid	Drywall	0
434	1964 Bldg.	9	XRF	4/5/97	1	Room	103	Wall	Wall	Solid	Plaster	0
435	1964 Bldg.	10	XRF	4/5/97	1	Room	103	Bulletin	Board	Solid	Wood	0.3
436	1964 Bldg.	11	XRF	4/5/97	1	Room	103	Wall	Midle Wall	Solid	Plaster	0.05
437	1964 Bldg.	12	XRF	4/5/97	1	Room	103	Door	Door	Solid	Wood	0
438	1964 Bldg.	13	XRF	4/5/97	1	Room	103	Door	Casing	Solid	Metal	0
439	1964 Bldg.	14	XRF	4/5/97	1	Room	103	Wall	Wall	Solid	Drywall	0
440	1964 Bldg.	15	XRF	4/5/97	1	Room	103		Elec Panel	Solid	Metal	0
441	1964 Bldg.	54	XRF	4/6/97	1	Room	103	Ceiling		Solid	Plaster	0.17

Saint Paul Public Schools
Farnsworth Outcome Based Education Magnet School
Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
3	Site	Sample #	Analysis	Date	Floor	Area	Room#	Component	Feature	Condition	Substrate	Result
442	1964 Bldg.	23	XRF	4/5/97	1	Room	104	Window	Casing	Solid	Metal	0
443	1964 Bldg.	24	XRF	4/5/97	1	Room	104		Radiator	Solid	Metal	0.01
444	1964 Bldg.	25	XRF	4/5/97	1	Room	104	Wall	Wall	Solid	Plaster	0.09
445	1964 Bldg.	26	XRF	4/5/97	1	Room	104	Wall	Wall	Solid	Tile	1.45
446	1964 Bldg.	27	XRF	4/5/97	1	Room	104	Wall	Wall	Solid	Plaster	5.09
447	1964 Bldg.	28	XRF	4/5/97	1	Room	104	Door	Door	Solid	Wood	0
448	1964 Bldg.	29	XRF	4/5/97	1	Room	104	Door	Casing	Solid	Metal	0.07
449	1964 Bldg.	30	XRF	4/5/97	1	Room	104	Wall	Crown mol	Solid	Wood	0.99
450	1964 Bldg.	53	XRF	4/6/97	1	Room	104	Ceiling		Solid	Plaster	0.03
451	1964 Bldg.	39	XRF	4/5/97	1	Room	105	Window	Casing	Solid	Metal	0
452	1964 Bldg.	40	XRF	4/5/97	1	Room	105		Radiator	Solid	Metal	0
453	1964 Bldg.	41	XRF	4/5/97	1	Room	105	Wall	Midle Wall	Solid	Drywall	0
454	1964 Bldg.	42	XRF	4/5/97	1	Room	105	Chalk	Board	Solid	Wood	5.09
455	1964 Bldg.	43	XRF	4/5/97	1	Room	105	Molding		Solid	Wood	5.09
456	1964 Bldg.	44	XRF	4/5/97	1	Room	105	Wall	Wall	Solid	Plaster	0.15
457	1964 Bldg.	45	XRF	4/5/97	1	Room	105	Door	Door	Solid	Wood	0
458	1964 Bldg.	46	XRF	4/5/97	1	Room	105	Door	Casing	Solid	Metal	0.08
459	1964 Bldg.	47	XRF	4/5/97	1	Room	105	Wall	Crown mol	Solid	Wood	2.9
460	1964 Bldg.	77	XRF	4/5/97	1	Room	109	Door	Door	Solid	Wood	0
461	1964 Bldg.	78	XRF	4/5/97	1	Room	109	Door	Casing	Solid	Metal	0
462	1964 Bldg.	79	XRF	4/5/97	1	Room	109	Wall	Midle Wall	Solid	Drywall	0
463	1964 Bldg.	80	XRF	4/5/97	1	Room	109	Wall	Midle Wall	Solid	Plaster	0.16
464	1964 Bldg.	81	XRF	4/5/97	1	Room	109	Cabinet	Door	Solid	Wood	0.05
465	1964 Bldg.	82	XRF	4/5/97	1	Room	109	Wall	Midle Wall	Solid	Concrte	0.01
466	1964 Bldg.	98	XRF	4/5/97	1	Room	110	Window	Casing	Cracked	Metal	0
467	1964 Bldg.	99	XRF	4/5/97	1	Room	110		Radiator	Cracked	Metal	0.02
468	1964 Bldg.	100	XRF	4/5/97	1	Room	110	Wall	Midle Wall	Cracked	Drywall	0
469	1964 Bldg.	101	XRF	4/5/97	1	Room	110	Chair	Rail	Solid	Wood	0.23
470	1964 Bldg.	102	XRF	4/5/97	1	Room	110	Wall	Wall	Solid	Plaster	5.09
471	1964 Bldg.	103	XRF	4/5/97	1	Room	110	Door	Door	Solid	Wood	0
472	1964 Bldg.	104	XRF	4/5/97	1	Room	110	Door	Casing	Solid	Metal	0
473	1964 Bldg.	105	XRF	4/5/97	1	Room	110	Cabinet	Door	Solid	Wood	0.09
474	1964 Bldg.	106	XRF	4/5/97	1	Room	111	Wall	Midle Wall	Solid	Concrte	0
475	1964 Bldg.	107	XRF	4/5/97	1	Room	111	Window	Casing	Solid	Metal	0
476	1964 Bldg.	108	XRF	4/5/97	1	Room	111		Radiator	Solid	Metal	0
477	1964 Bldg.	109	XRF	4/5/97	1	Room	111	Wall	Midle Wall	Solid	Drywall	0
478	1964 Bldg.	110	XRF	4/5/97	1	Room	111	Door	Door	Solid	Wood	0
479	1964 Bldg.	111	XRF	4/5/97	1	Room	111	Door	Casing	Solid	Metal	0
480	1964 Bldg.	112	XRF	4/5/97	1	Room	111	Door	Door	Solid	Metal	0.01
481	1964 Bldg.	123	XRF	4/5/97	1	Room	113	Wall	Wall	Solid	Concrte	0
482	1964 Bldg.	124	XRF	4/5/97	1	Room	113	Window	Casing	Solid	Metal	0
483	1964 Bldg.	125	XRF	4/5/97	1	Room	113		Radiator	Solid	Metal	0
484	1964 Bldg.	126	XRF	4/5/97	1	Room	113	Door	Door	Solid	Metal	0.02
485	1964 Bldg.	127	XRF	4/5/97	1	Room	113	Door	Casing	Solid	Metal	0
486	1964 Bldg.	128	XRF	4/5/97	1	Room	113	Door	Door	Solid	Wood	0
487	1964 Bldg.	91	XRF	4/5/97	1	Room	115	Door	Door	Solid	Wood	0
488	1964 Bldg.	92	XRF	4/5/97	1	Room	115	Door	Casing	Solid	Metal	0
489	1964 Bldg.	93	XRF	4/5/97	1	Room	115	Cabinet	Door	Solid	Wood	0.06
490	1964 Bldg.	94	XRF	4/5/97	1	Room	115	Wall	Midle Wall	Solid	Drywall	0
491	1964 Bldg.	95	XRF	4/5/97	1	Room	115	Wall	Wall	Cracked	Plaster	5.09
492	1964 Bldg.	96	XRF	4/5/97	1	Room	115	Wall	Midle Wall	Cracked	Concrte	0.01
493	1964 Bldg.	97	XRF	4/5/97	1	Room	115	Chalk	Board	Cracked	Wood	0.14
494	1964 Bldg.	159	XRF	4/5/97	1	Room	116	Wall	Midle Wall	Solid	Concrte	0
495	1964 Bldg.	160	XRF	4/5/97	1	Room	116	Wall	Midle Wall	Solid	Concrte	0
496	1964 Bldg.	161	XRF	4/5/97	1	Room	116	Door	Door	Solid	Metal	0

Saint Paul Public Schools
Farnsworth Outcome Based Education Magnet School
Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
3	Site	Sample #	Analysis	Date	Floor	Area	Room#	Component	Feature	Condition	Substrate	Result
497	1964 Bldg.	162	XRF	4/5/97	1	Room	116	Door	Casing	Solid	Metal	0
498	1964 Bldg.	163	XRF	4/5/97	1	Room	116	Floor		Solid	Concrte	0.04
499	1964 Bldg.	155	XRF	4/5/97	1	Room	117	Wall	Midle Wall	Solid	Concrte	0
500	1964 Bldg.	156	XRF	4/5/97	1	Room	117	Door	Door	Solid	Wood	0
501	1964 Bldg.	157	XRF	4/5/97	1	Room	117	Door	Casing	Solid	Metal	0
502	1964 Bldg.	158	XRF	4/5/97	1	Room	117	Door	Door	Solid	Metal	0
503	1964 Bldg.	152	XRF	4/5/97	1	Room	119	Wall	Midle Wall	Solid	Concrte	0
504	1964 Bldg.	153	XRF	4/5/97	1	Room	119	Door	Door	Solid	Wood	0
505	1964 Bldg.	154	XRF	4/5/97	1	Room	119	Door	Casing	Solid	Metal	0
506	1964 Bldg.	31	XRF	4/5/97	1	Room	125	Door	Door	Solid	Wood	0
507	1964 Bldg.	32	XRF	4/5/97	1	Room	125	Door	Casing	Solid	Metal	0
508	1964 Bldg.	33	XRF	4/5/97	1	Room	125	Cabinet	Door	Solid	Wood	0.03
509	1964 Bldg.	34	XRF	4/5/97	1	Room	125	Wall	Midle Wall	Solid	Plaster	0.25
510	1964 Bldg.	35	XRF	4/5/97	1	Room	125	Window	Casing	Solid	Metal	0
511	1964 Bldg.	36	XRF	4/5/97	1	Room	125		Radiator	Solid	Metal	0.01
512	1964 Bldg.	37	XRF	4/5/97	1	Room	125	Wall	Midle Wall	Solid	Drywall	0.04
513	1964 Bldg.	38	XRF	4/5/97	1	Room	125	Wall	Wall	Solid	Plaster	0.06
514	1964 Bldg.	52	XRF	4/6/97	1	Room	125	Ceiling		Solid	Plaster	0.05
515	1964 Bldg.	16	XRF	4/5/97	1	Room	126	Door	Door	Solid	Wood	0
516	1964 Bldg.	17	XRF	4/5/97	1	Room	126	Door	Casing	Solid	Metal	0.01
517	1964 Bldg.	18	XRF	4/5/97	1	Room	126	Cabinet	Door	Solid	Wood	0.04
518	1964 Bldg.	19	XRF	4/5/97	1	Room	126	Wall	Midle Wall	Solid	Drywall	0
519	1964 Bldg.	20	XRF	4/5/97	1	Room	126	Window	Casing	Solid	Metal	0
520	1964 Bldg.	21	XRF	4/5/97	1	Room	126		Radiator	Solid	Metal	0
521	1964 Bldg.	22	XRF	4/5/97	1	Room	126	Wall	Wall	Solid	Plaster	5.09
522	1964 Bldg.	55	XRF	4/6/97	1	Room	126	Ceiling		Solid	Plaster	0.01
523	1964 Bldg.	196	XRF	4/5/97	1	Room	127	Door	Door	Solid	Metal	0
524	1964 Bldg.	197	XRF	4/5/97	1	Room	127	Door	Casing	Solid	Metal	0
525	1964 Bldg.	198	XRF	4/5/97	1	Room	127	Stairs	Hand rail	Solid	Metal	0.02
526	1964 Bldg.	212	XRF	4/5/97	1	Room	129	Door	Door	Solid	Metal	0.02
527	1964 Bldg.	213	XRF	4/5/97	1	Room	129	Door	Casing	Solid	Metal	0
528	1964 Bldg.	214	XRF	4/5/97	1	Room	129	Wall	Wall Rgstr	Solid	Metal	0
529	1964 Bldg.	215	XRF	4/5/97	1	Room	129	Wall	Midle Wall	Solid	Concrte	0
530	1964 Bldg.	216	XRF	4/5/97	1	Room	129	Door	Door	Solid	Wood	0
531	1964 Bldg.	192	XRF	4/5/97	1	Room	130	Wall	Midle Wall	Solid	Concrte	0
532	1964 Bldg.	193	XRF	4/5/97	1	Room	130	Stairs	Hand rail	Solid	Metal	0
533	1964 Bldg.	194	XRF	4/5/97	1	Room	130	Door	Door	Solid	Wood	0
534	1964 Bldg.	195	XRF	4/5/97	1	Room	130	Door	Casing	Solid	Metal	0
535	1964 Bldg.	208	XRF	4/5/97	1	Room	131	Wall	Midle Wall	Solid	Concrte	0.01
536	1964 Bldg.	209	XRF	4/5/97	1	Room	131		Radiator	Solid	Metal	0
537	1964 Bldg.	210	XRF	4/5/97	1	Room	131	Door	Door	Solid	Wood	0
538	1964 Bldg.	211	XRF	4/5/97	1	Room	131	Door	Casing	Solid	Metal	0
539	1964 Bldg.	179	XRF	4/5/97	1	Room	136	Door	Door	Solid	Wood	0
540	1964 Bldg.	180	XRF	4/5/97	1	Room	136	Door	Casing	Solid	Metal	0
541	1964 Bldg.	181	XRF	4/5/97	1	Room	136	Door	Door	Solid	Metal	0.05
542	1964 Bldg.	57	XRF	4/6/97	1	Room	137	Ceiling		Solid	Drywall	0
543	1964 Bldg.	174	XRF	4/5/97	1	Room	138	Wall	Midle Wall	Solid	Concrte	0
544	1964 Bldg.	175	XRF	4/5/97	1	Room	138	Locker		Solid	Metal	0.02
545	1964 Bldg.	176	XRF	4/5/97	1	Room	138		Radiator	Solid	Metal	0.02
546	1964 Bldg.	177	XRF	4/5/97	1	Room	138	Door	Door	Solid	Wood	0
547	1964 Bldg.	178	XRF	4/5/97	1	Room	138	Door	Casing	Solid	Metal	0
548	1964 Bldg.	71	XRF	4/5/97	1	Room	100A	Window	Casing	Solid	Metal	0
549	1964 Bldg.	72	XRF	4/5/97	1	Room	100A		Radiator	Solid	Metal	0
550	1964 Bldg.	73	XRF	4/5/97	1	Room	100A	Wall	Wall	Solid	Plaster	0.15
551	1964 Bldg.	74	XRF	4/5/97	1	Room	100A	Door	Door	Solid	Wood	0

Saint Paul Public Schools
Farnsworth Outcome Based Education Magnet School
Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K	L
3	Site	Sample #	Analysis	Date	Floor	Area	Room#	Component	Feature	Condition	Substrate	Result
552	1964 Bldg.	75	XRF	4/5/97	1	Room	100A	Door	Casing	Solid	Metal	0
553	1964 Bldg.	76	XRF	4/5/97	1	Room	100A	Wall	Midle Wall	Solid	Concrte	0
554	1964 Bldg.	64	XRF	4/5/97	1	Room	100B	Window	Casing	Solid	Metal	0
555	1964 Bldg.	65	XRF	4/5/97	1	Room	100B		Radiator	Solid	Metal	0.01
556	1964 Bldg.	66	XRF	4/5/97	1	Room	100B	Wall	Midle Wall	Solid	Drywall	0.03
557	1964 Bldg.	67	XRF	4/5/97	1	Room	100B	Wall	Midle Wall	Solid	Concrte	0.12
558	1964 Bldg.	68	XRF	4/5/97	1	Room	100B	Wall	Wall	Solid	Plaster	0.02
559	1964 Bldg.	69	XRF	4/5/97	1	Room	100B	Door	Door	Solid	Wood	0
560	1964 Bldg.	70	XRF	4/5/97	1	Room	100B	Door	Casing	Solid	Metal	0
561	1964 Bldg.	83	XRF	4/5/97	1	Room	109A	Wall	Midle Wall	Solid	Drywall	0
562	1964 Bldg.	84	XRF	4/5/97	1	Room	109A	Door	Door	Solid	Wood	0
563	1964 Bldg.	85	XRF	4/5/97	1	Room	109A	Door	Casing	Solid	Metal	0.01
564	1964 Bldg.	113	XRF	4/5/97	1	Room	110A	Wall	Midle Wall	Solid	Concrte	0
565	1964 Bldg.	114	XRF	4/5/97	1	Room	110A	Door	Door	Solid	Wood	0
566	1964 Bldg.	115	XRF	4/5/97	1	Room	110A	Door	Casing	Solid	Metal	0
567	1964 Bldg.	116	XRF	4/5/97	1	Room	110A		Radiator	Solid	Metal	0
568	1964 Bldg.	117	XRF	4/5/97	1	Room	115A	Chalk	Board	Solid	Wood	0.21
569	1964 Bldg.	118	XRF	4/5/97	1	Room	115A	Door	Door	Solid	Wood	0
570	1964 Bldg.	119	XRF	4/5/97	1	Room	115A	Door	Casing	Solid	Metal	0.01
571	1964 Bldg.	120	XRF	4/5/97	1	Room	115A	Wall	Midle Wall	Solid	Drywall	0.04
572	1964 Bldg.	121	XRF	4/5/97	1	Room	115A	Wall	Wall	Cracked	Plaster	5.09
573	1964 Bldg.	122	XRF	4/5/97	1	Room	115A	Wall	Midle Wall	Solid	Concrte	0.06
574	1964 Bldg.	164	XRF	4/5/97	1	Room	120A	Wall	Midle Wall	Solid	Concrte	0
575	1964 Bldg.	165	XRF	4/5/97	1	Room	120A	Door	Door	Solid	Wood	0
576	1964 Bldg.	166	XRF	4/5/97	1	Room	120A	Door	Casing	Solid	Metal	0
577	1964 Bldg.	129	XRF	4/5/97	1	Room	RR113A	Door	Door	Solid	Wood	0
578	1964 Bldg.	130	XRF	4/5/97	1	Room	RR113A	Door	Casing	Solid	Metal	0
579	1964 Bldg.	131	XRF	4/5/97	1	Room	RR113A	Wall	Midle Wall	Solid	Concrte	0.01

APPENDIX B

LABORATORY SAMPLE ANALYSIS DATA



301 West County Road E2 • St. Paul, MN 55112
(612) 633-0101 • FAX (612) 633-1402

LABORATORY ANALYSIS REPORT

DATE: April 23, 1997

PAGE:

1 Of 1

CLIENT: Midwest Environmental Cons.
5385 401st Ave. NW
Dalbo, MN 55017

PROJECT NO.: 040997-200888
COLLECTION DATE: 4/06/97
COLLECTED BY: Client
RECEIVED DATE: 4/09/97
PROJECT DESCRP.: 62/0197L

CONTACT: Richard Cox/Greg Myers

<u>SAMPLE #</u>	<u>DESCP.</u>	<u>MDL</u>	<u>LEAD</u> (6010A) Units=mg/kg	<u>ANALYSIS</u>
			<u>RESULTS</u>	<u>DATE</u>
L972012-1	LB1	28	4600	4/22/97
L972012-2	LB2	49	2100	4/22/97
L972012-3	LB3	33	ND	4/22/97
L972012-4	LB4	32	1200	4/22/97
L972012-5	LB5	41	44	4/22/97
L972012-6	LB6	36	180	4/22/97

ND means Not Detected or below reported MDL

MDL means Method Detection Limit

mg/kg means Milligrams Per Kilogram which is equivalent to Parts Per Million (ppm)

This report has been reviewed by me for technical accuracy and completeness. The analyses were performed using EPA or other approved methodologies and the results were reported on an "as received" basis unless otherwise noted. Organic soil analyses were reported on a dry weight basis. The results reported relate only to the items tested. Please contact me if you have any questions or comments regarding this report. Spectrum Labs, Inc. appreciates the opportunity to provide this analytical service for you.

Report Submitted By,

Thomas L. Halverson
Laboratory Manager

TLH:wmc
mec113-9

As a mutual protection, all reports are submitted in confidentiality and may not be reproduced except in full without written authorization.



A member of The Marmon Group of Companies



Phone/Fax

Notes: Report results in parts per million

APPENDIX C INSPECTOR

Bob Hargrove
MDH Lead Inspector # 416