


Midwest
Environmental
Consulting, L.L.C.



♻️ Printed on Recycled Paper

**Sheridan Elementary School
Saint Paul Public Schools**

Lead-Based Paint Inspection

Inspection Dates: 10/16/97, 10/17/97

submitted to:

Saint Paul Public Schools

MEC Project # 62/0197BC

38894 Llama Street NW * Dalbo, Minnesota 55017 * (612) 689-3612
fax (612) 689-5209

INTRODUCTION

At the request of Saint Paul Public Schools Environmental Safety Department, Midwest Environmental Consulting, L.L.C. (MEC), conducted a lead-based paint inspection at Sheridan Elementary School, 525 N. White Bear Avenue, St. Paul, MN. The purpose of this inspection was to identify lead-based painted, varnished, or otherwise coated building components on the interior and exterior of the school building.

The inspection protocol incorporated applicable portions of the U.S. Department of Housing and Urban Development (HUD) *Guidelines for the Evaluation and Control of Lead-based Paint Hazards in Housing* (HUD Guidelines, June 1995) and OSHA 1926.62 requirements (Lead in Construction). The HUD guidelines are formulated to guide agencies in conducting random sampling of the interiors and exteriors of dwellings and common areas in public housing. The OSHA requirement is designed to minimize worker exposure when working with material containing lead.

The United States Environmental Protection Agency defines "lead-based paint" as a paint or other surface coating that contains lead equal to or in excess of 1.0 milligrams per square centimeter when analyzed by XRF or more than 0.5% by weight (5000 parts per million) by laboratory analysis of a bulk sample.

Minnesota Department of Labor and Industry (MN OSHA) adopted the EPA lead levels for the purpose of enforcing OSHA 1926.62 federal regulations. Detection of lead in dried paint film by XRF is a dependable indicator of levels of lead and is accepted by MN OSHA.

For this Saint Paul Public Schools Lead Inspection, all building components were tested on site using a Niton XL® X-ray Fluorescence Spectrum Analyzer⁽¹⁾. Building components included walls, ceilings, floors, moldings, window and door components, door surfaces, and miscellaneous features such as shelves or bookcases. Only painted or glazed surfaces or surfaces which were varnished were tested. Suspended ceilings, structural steel, and corrugated decking were not included in the inspection. Neither anodized (e.g., window sashes) nor plastic (e.g., vinyl baseboard and vinyl mini-blinds) were included in the scope of this inspection.

No samples were collected from this school for laboratory analysis.

Each building was divided into unique sites based on the year of construction or renovation. Portable classrooms, playgrounds, and other detached buildings were automatically designated as a unique site. Each site was inspected independently assuming differences in painting history and construction characteristics.

⁽¹⁾ This is a portable hand held machine that can analyze building components instantly for lead concentrations.

SITE DESCRIPTION AND BUILDING HISTORY

According to information provided to MEC by Saint Paul Public Schools, Sheridan Elementary School was constructed in essentially two phases. The initial phase includes the 30,912 square-foot older section of the building and dates from 1957. The second phase is a 15,540 square foot addition dating from 1995.

All room and area designations used in this report are depicted on sampling maps found in Appendix A.

XRF SAMPLE RESULTS TABLE

The results of all samples analyzed are listed in the table at the end of this section. The following is a description of the column headings:

Site	Each school is divided into sites based on their unique construction characteristics. Each site has a unique date of construction or major renovation.
Sample #	Each sample taken was given a unique number to identify the type and location of the sample. The sampling date is an integral part of the sample number.
Analysis	This defines the type of analysis which can be categorized into two types: 1) XRF: This is an on-site analysis using a hand held Niton XL® X-ray Fluorescence Spectrum Analyzer; 2) Bulk or Chip: This is a bulk sample where paint is removed from the substrate and sent to a laboratory for analysis;
Floor	This is the level of the building in which the area tested was found, example, 1 (first floor), 0 (basement), etc.
Area	This further defines the specific functional space inspected such as a classroom, exterior, playground, gym, kitchen, etc.
Room #	This is typically the actual number on the room as identified at the building.
Component	Building "components" included walls, ceilings, floors, moldings, window and door components, door surfaces, and miscellaneous features such as shelves or bookcases.

- Feature** Identifies more detailed information of the component.
- Condition** This describes condition of the surface, whether it is intact, cracked, peeling, or chalking.
- Substrate** This refers to the material the building component is made of (wood, concrete, drywall, metal, etc.).
- Result** This is the analysis results for lead. Less than 1.0 mg/cm² or less than 0.5% by weight is considered to be non-lead and these building components are below the action levels of EPA and HUD. (All results are in mg/cm² except where noted.)

The table of results is designed for quick information on lead concentrations of tested building components. Generally, all repetitions of a test combination within a given room or area, may be assumed to contain similar concentrations of lead to that of the tested sample. For instance, the lead concentration of a tested wooden window sash was found to be above the action level of 1.0 mg/cm² in a given classroom. The classroom has five windows, all of wood, the same color and appearing to be of the same era. It can be assumed that the remaining four wooden window sashes each contain lead above the action limit.

Other columns identify the component and the component feature tested, condition of the component, type of substrate and the result of the analytical test.

As an example, the following illustration shows that the wooden door jamb in Room 123, first floor in the 1923 building section was in good, solid condition, and had an XRF test result of 0.3 mg/cm², which is below the action level.

Illustration Only

Site	Sample #	Date	Analysis	Floor	Area	Room #	Component	Feature	Condition	Substrate	Results
1923 Bldg.	52		XRF	1	Room	123	Door	Jamb	Solid	Wood	0.3

In a similar manner, the table shows that the plaster walls in room 23, on the second floor has peeling paint with more than 1.0 mg/cm² (shaded).

ILLUSTRATION ONLY

Site	Sample #	Date	Analysis	Floor	Area	Room #	Component	Feature	Condition	Substrate	Results
1910 Bldg.	16		XRF	2	Room	23	Door	Jamb	Peeling	Wood	0.25
1910 Bldg.	17		XRF	2	Room	23	Wall	Wall	Peeling	Plaster	1.2
1910 Bldg.	18		XRF	2	Room	23		Ceiling	Peeling	Plaster	0.25
1910 Bldg.	19		XRF	2	Room	23	Wall	Baseboard	Peeling	Wood	0.002

APPLICABLE REGULATIONS


When building components test above 1.0 mg/cm² of lead by XRF or 0.5% lead by weight from laboratory analysis all employees and contractors who will be working with these components in a construction related activity must be notified. The requirements of OSHA 1926.62, Lead in Construction are enforceable. This regulation defines construction work as "work for construction, alteration and/or repair, including painting and decorating." This regulation further defines monitoring requirements to minimize employee exposure to lead during construction activities.

When work is performed on external painted building structures (i.e. flashing, fire escapes, playground equipment, handrails, etc.), regulations of the Minnesota Pollution Control Agency (MPCA) may also be applicable. For removal of lead based paint from steel structures, MN Rules 7025.0200 - 7025.0380 apply to steel materials on the exterior of a building, or on the property when levels exceed 0.5 mg/cm² based on the average of three XRF spectrum results of the sample tested, or 5,000 ppm by laboratory analysis. If it is other than a steel surface, then MPCA regulates the painted surfaces under MN Rules 7025.010 - 7025.0080, when surfaces are to be disturbed using abrasive blasting methods.

Please contact MEC directly if you have questions about any portion of this report or the lead-based paint inspection itself.



APPENDIX A

**XRF TESTING DATA
WITH
LOCATION MAPS**

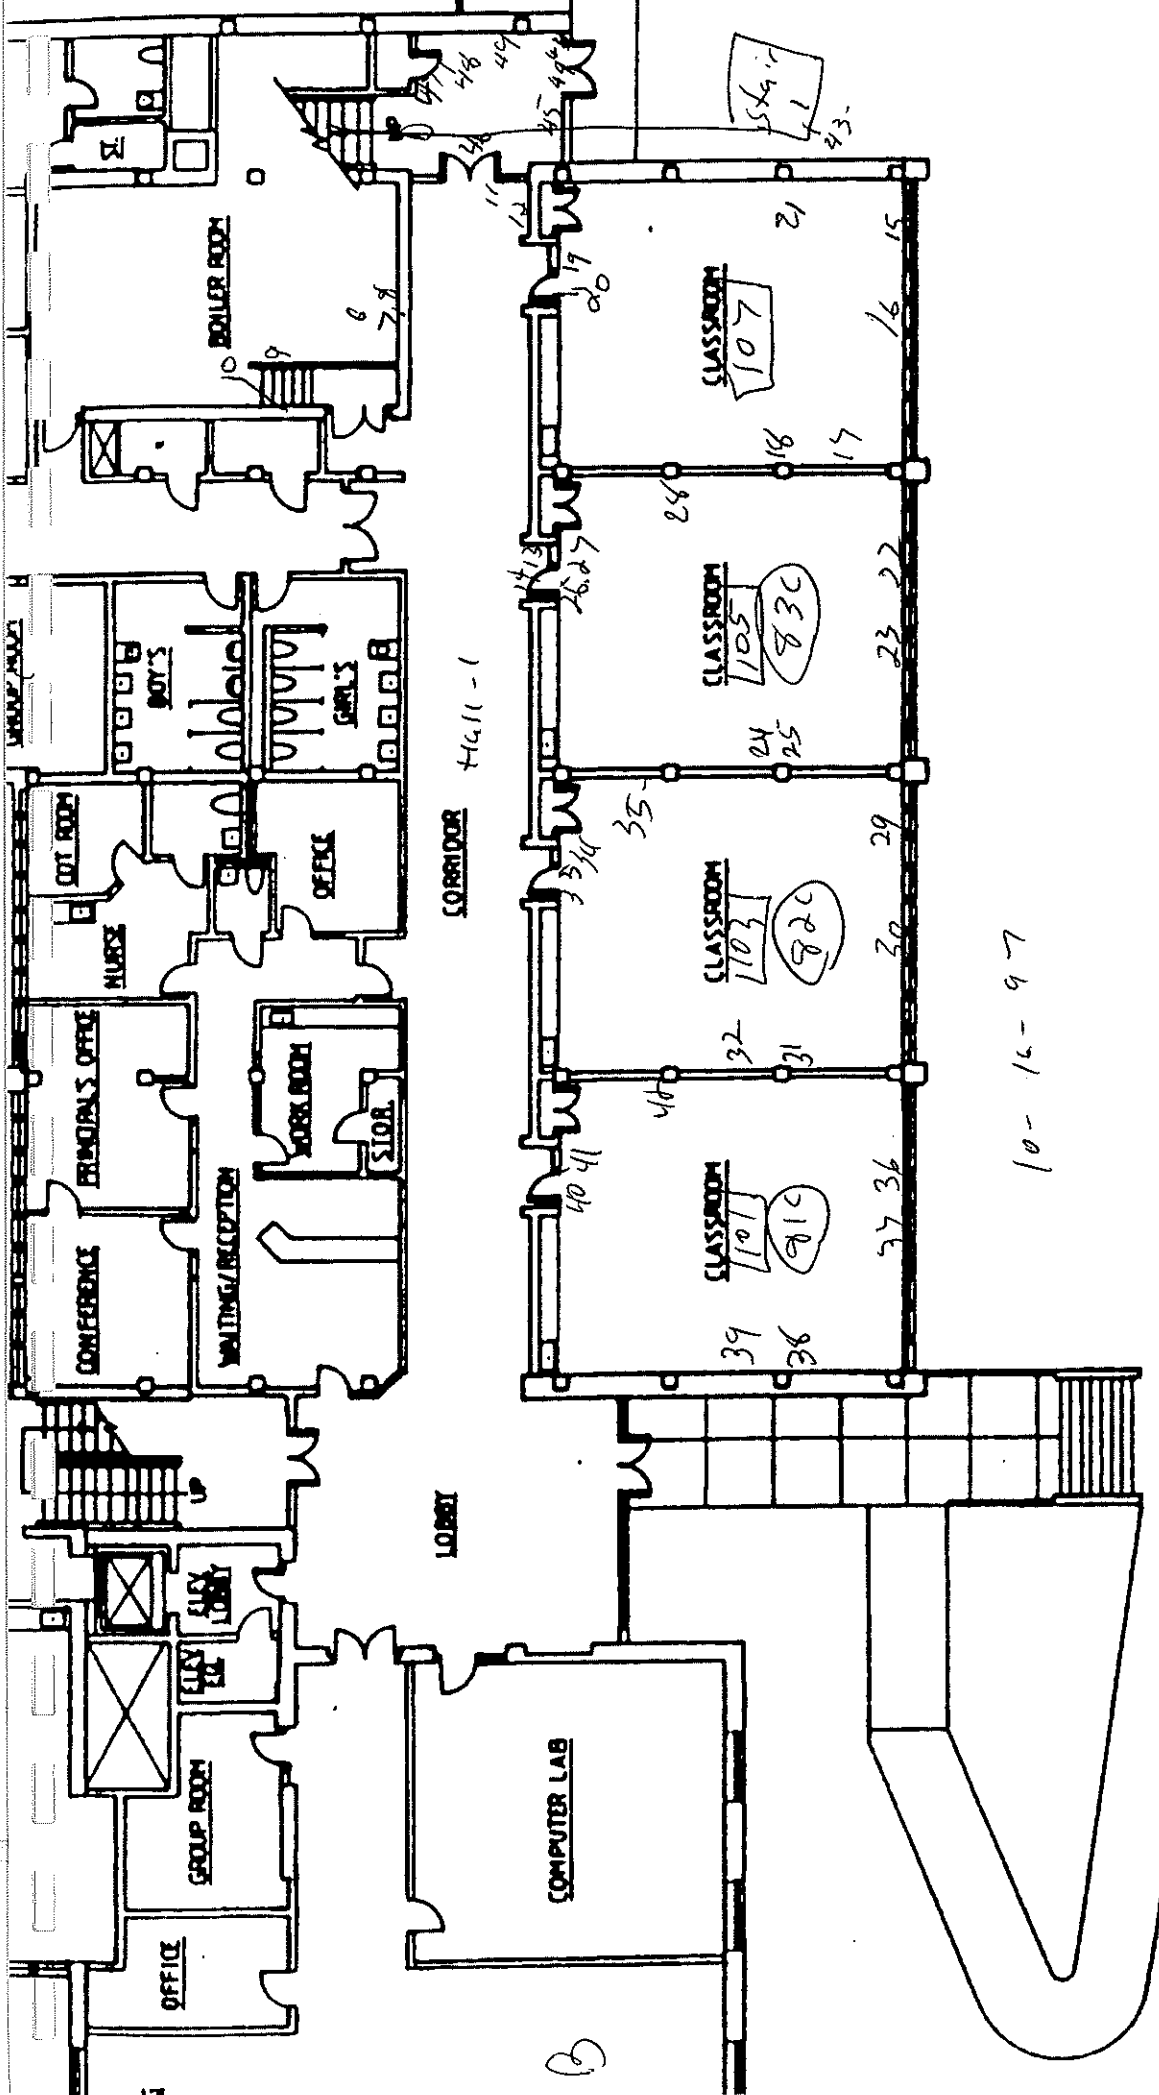

10-12-97

A

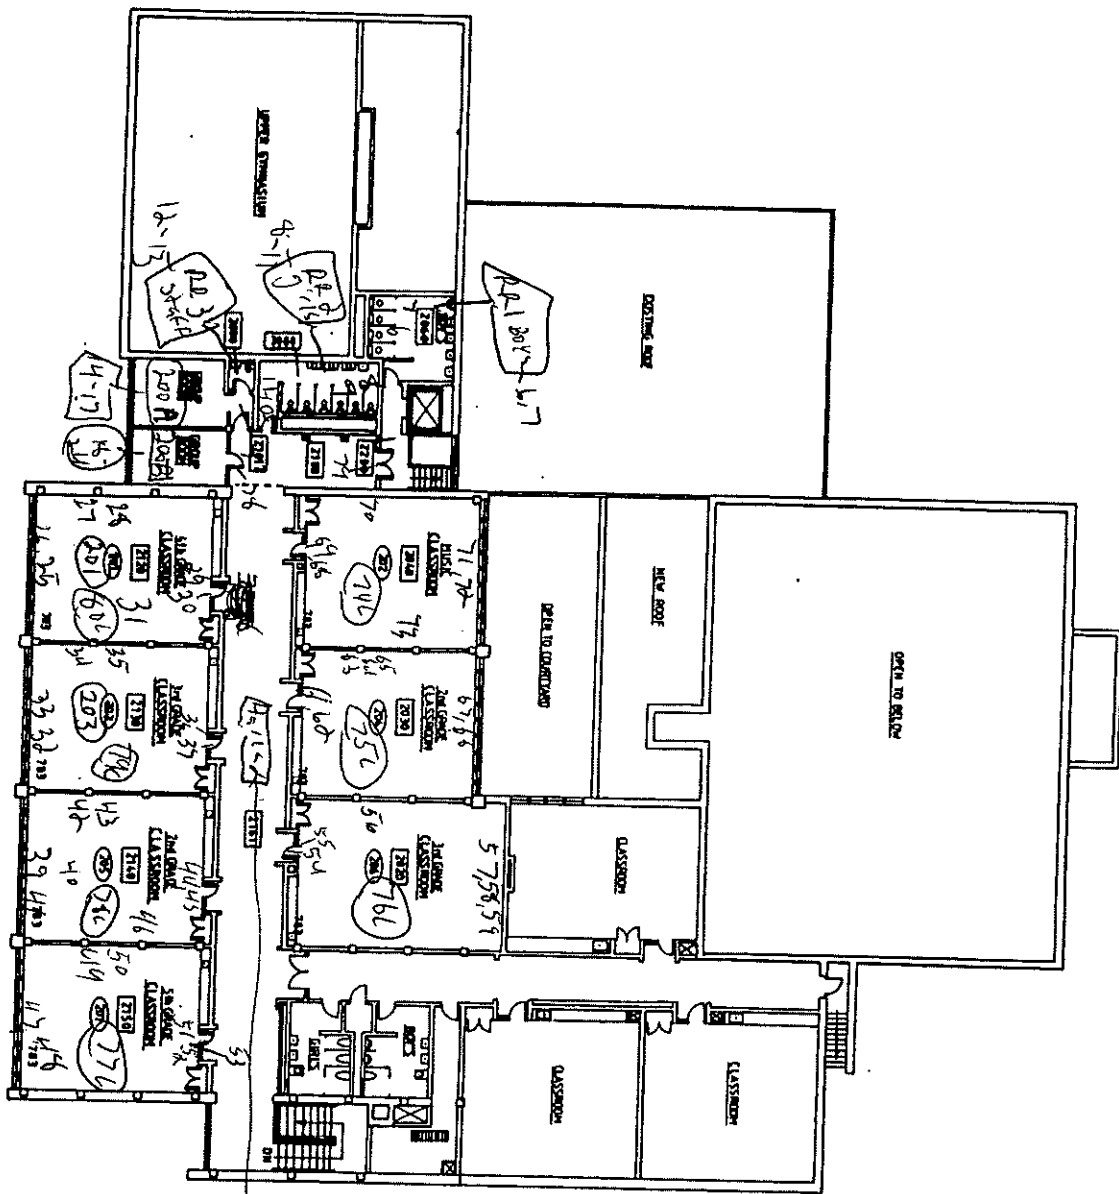


INDEPENDANT SCHOOL DIST. #625
360 COLBORNE STREET
ST. PAUL, MN 55102

SHERIDAN ELEMENTARY
525 WHITE BEAR AVE.
ST. PAUL, MINNESOTA

CONSTRUCTED 1957

3 OF 4



2 OF 4

Saint Paul Public Schools
Sheridan Elementary
Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K
1	Sheridan Elementary										
2											
3	Site	Sample #	Date	Analysis	Floor	Area & Room #	Component	Feature	Condition	Substrate	Result
4	1957 Bldg.	81	10/17/97	XRF	1	Classroom-101	Ceiling		Solid	Concrte	0
5	1957 Bldg.	36	10/16/97	XRF	1	Classroom-101A	Bookcase	Shelf	Solid	Wood	0
6	1957 Bldg.	39	10/16/97	XRF	1	Classroom-101A	Chalkboard	Rail	Peeling	Wood	0
7	1957 Bldg.	40	10/16/97	XRF	1	Classroom-101A	Door	Casing-Rht	Peeling	Metal	0.02
8	1957 Bldg.	41	10/16/97	XRF	1	Classroom-101A	Door	Door	Solid	Wood	0
9	1957 Bldg.	38	10/16/97	XRF	1	Classroom-101A	Wall	Wall-Lwr	Solid	Concrte	0.08
10	1957 Bldg.	42	10/16/97	XRF	1	Classroom-101A	Wall	Wall-Upr	Solid	Concrte	0.01
11	1957 Bldg.	37	10/16/97	XRF	1	Classroom-101A		Radiator	Solid	Metal	0.01
12	1957 Bldg.	60	10/16/97	XRF	1	Classroom-102	Bookcase	Shelf	Solid	Wood	0
13	1957 Bldg.	64	10/16/97	XRF	1	Classroom-102	Bookcase	Inside	Cracked	Wood	1.02
14	1957 Bldg.	65	10/16/97	XRF	1	Classroom-102	Bookcase	Shelf	Cracked	Wood	1.09
15	1957 Bldg.	59	10/16/97	XRF	1	Classroom-102	Cabinet	Door-Out	Peeling	Wood	0
16	1957 Bldg.	56	10/16/97	XRF	1	Classroom-102	Chalkboard	Rail	Solid	Wood	0
17	1957 Bldg.	61	10/16/97	XRF	1	Classroom-102	Door	Casing-Lft	Solid	Metal	0.02
18	1957 Bldg.	62	10/16/97	XRF	1	Classroom-102	Door	Door	Solid	Wood	0
19	1957 Bldg.	63	10/16/97	XRF	1	Classroom-102	Table		Peeling	Wood	0
20	1957 Bldg.	55	10/16/97	XRF	1	Classroom-102	Wall	Wall-Lwr	Solid	Concrte	0.19
21	1957 Bldg.	57	10/16/97	XRF	1	Classroom-102	Wall	Mural	Solid	Concrte	0.25
22	1957 Bldg.	58	10/16/97	XRF	1	Classroom-102	Wall	Mural	Solid	Concrte	0.2
23	1957 Bldg.	82	10/17/97	XRF	1	Classroom-103	Ceiling		Solid	Concrte	0
24	1957 Bldg.	29	10/16/97	XRF	1	Classroom-103A	Bookcase	Shelf	Solid	Wood	0
25	1957 Bldg.	32	10/16/97	XRF	1	Classroom-103A	Chalkboard	Rail	Solid	Wood	0
26	1957 Bldg.	33	10/16/97	XRF	1	Classroom-103A	Door	Casing-Rht	Cracked	Metal	0.01
27	1957 Bldg.	34	10/16/97	XRF	1	Classroom-103A	Door	Door	Solid	Wood	0
28	1957 Bldg.	31	10/16/97	XRF	1	Classroom-103A	Wall	Wall-Lwr	Solid	Concrte	0.07
29	1957 Bldg.	35	10/16/97	XRF	1	Classroom-103A	Wall	Wall-Upr	Solid	Concrte	0.12
30	1957 Bldg.	30	10/16/97	XRF	1	Classroom-103A		Radiator	Solid	Metal	0.03
31	1957 Bldg.	71	10/16/97	XRF	1	Classroom-104	Bookcase	Shelf	Solid	Wood	0
32	1957 Bldg.	72	10/16/97	XRF	1	Classroom-104	Bookcase	Shelf	Solid	Wood	0
33	1957 Bldg.	66	10/16/97	XRF	1	Classroom-104	Cabinet	Outside	Peeling	Wood	0
34	1957 Bldg.	68	10/16/97	XRF	1	Classroom-104	Chair		Peeling	Wood	2.58
35	1957 Bldg.	69	10/16/97	XRF	1	Classroom-104	Chair		Peeling	Wood	0.81
36	1957 Bldg.	70	10/16/97	XRF	1	Classroom-104	Chalkboard	Rail	Peeling	Wood	0
37	1957 Bldg.	75	10/16/97	XRF	1	Classroom-104	Door	Casing-Lft	Peeling	Metal	0.01
38	1957 Bldg.	76	10/16/97	XRF	1	Classroom-104	Door	Door	Solid	Wood	0
39	1957 Bldg.	67	10/16/97	XRF	1	Classroom-104	Table		Solid	Wood	0
40	1957 Bldg.	73	10/16/97	XRF	1	Classroom-104	Toy Box		Peeling	Wood	0.49
41	1957 Bldg.	74	10/16/97	XRF	1	Classroom-104	Wall	Midle Wall	Solid	Concrte	0.01
42	1957 Bldg.	83	10/17/97	XRF	1	Classroom-105	Ceiling		Solid	Concrte	0
43	1957 Bldg.	22	10/16/97	XRF	1	Classroom-105A	Bookcase	Shelf	Solid	Wood	0
44	1957 Bldg.	25	10/16/97	XRF	1	Classroom-105A	Chalkboard	Rail	Peeling	Wood	0
45	1957 Bldg.	26	10/16/97	XRF	1	Classroom-105A	Door	Casing-Rht	Cracked	Metal	0.02
46	1957 Bldg.	27	10/16/97	XRF	1	Classroom-105A	Door	Door	Solid	Wood	0
47	1957 Bldg.	24	10/16/97	XRF	1	Classroom-105A	Wall	Wall-Lwr	Solid	Concrte	0
48	1957 Bldg.	28	10/16/97	XRF	1	Classroom-105A	Wall	Wall-Upr	Solid	Concrte	0
49	1957 Bldg.	23	10/16/97	XRF	1	Classroom-105A		Radiator	Solid	Metal	0.01
50	1957 Bldg.	15	10/16/97	XRF	1	Classroom-107	Bookcase	Shelf	Solid	Wood	0
51	1957 Bldg.	18	10/16/97	XRF	1	Classroom-107	Chalkboard	Rail	Solid	Wood	0
52	1957 Bldg.	19	10/16/97	XRF	1	Classroom-107	Door	Casing-Rht	Solid	Metal	0.05
53	1957 Bldg.	20	10/16/97	XRF	1	Classroom-107	Door	Door	Solid	Wood	0
54	1957 Bldg.	17	10/16/97	XRF	1	Classroom-107	Wall	Wall-Lwr	Solid	Concrte	0.03
55	1957 Bldg.	21	10/16/97	XRF	1	Classroom-107	Wall	Wall-Upr	Solid	Concrte	0.04
56	1957 Bldg.	16	10/16/97	XRF	1	Classroom-107		Radiator	Solid	Metal	0.02

Saint Paul Public Schools
 Sheridan Elementary
 Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K
3	Site	Sample #	Date	Analysis	Floor	Area & Room #	Component	Feature	Condition	Substrate	Result
57	1957 Bldg.	26	10/17/97	XRF	1	Classroom-201	Bookcase	Shelf	Solid	Wood	0
58	1957 Bldg.	80	10/17/97	XRF	1	Classroom-201	Ceiling		Solid	Concrte	0
59	1957 Bldg.	28	10/17/97	XRF	1	Classroom-201	Chalkboard	Rail	Peeling	Wood	0
60	1957 Bldg.	29	10/17/97	XRF	1	Classroom-201	Door	Casing-Rht	Cracked	Metal	0.04
61	1957 Bldg.	30	10/17/97	XRF	1	Classroom-201	Door	Door	Solid	Wood	0
62	1957 Bldg.	27	10/17/97	XRF	1	Classroom-201	Wall	Wall-Upr	Solid	Concrte	0.12
63	1957 Bldg.	31	10/17/97	XRF	1	Classroom-201	Wall	Wall-Lwr	Solid	Concrte	0.1
64	1957 Bldg.	25	10/17/97	XRF	1	Classroom-201		Radiator	Solid	Metal	0.06
65	1957 Bldg.	74	10/17/97	XRF	1	Classroom-202	Ceiling		Solid	Concrte	0
66	1957 Bldg.	71	10/17/97	XRF	1	Classroom-202	Chalkboard	Rail	Cracked	Wood	0
67	1957 Bldg.	68	10/17/97	XRF	1	Classroom-202	Door	Casing-Rht	Cracked	Metal	0.02
68	1957 Bldg.	69	10/17/97	XRF	1	Classroom-202	Door	Door	Solid	Wood	0
69	1957 Bldg.	70	10/17/97	XRF	1	Classroom-202	Wall	Wall-Lwr	Solid	Concrte	0.02
70	1957 Bldg.	73	10/17/97	XRF	1	Classroom-202	Wall	Wall-Upr	Solid	Concrte	0
71	1957 Bldg.	72	10/17/97	XRF	1	Classroom-202		Radiator	Solid	Metal	0.03
72	1957 Bldg.	32	10/17/97	XRF	1	Classroom-203	Bookcase	Shelf	Solid	Wood	0
73	1957 Bldg.	79	10/17/97	XRF	1	Classroom-203	Ceiling		Solid	Concrte	0
74	1957 Bldg.	34	10/17/97	XRF	1	Classroom-203	Chalkboard	Rail	Solid	Wood	0
75	1957 Bldg.	36	10/17/97	XRF	1	Classroom-203	Door	Casing-Rht	Cracked	Metal	0.02
76	1957 Bldg.	37	10/17/97	XRF	1	Classroom-203	Door	Door	Solid	Wood	0
77	1957 Bldg.	35	10/17/97	XRF	1	Classroom-203	Wall	Wall-Upr	Solid	Concrte	0.02
78	1957 Bldg.	38	10/17/97	XRF	1	Classroom-203	Wall	Wall-Lwr	Solid	Concrte	0.17
79	1957 Bldg.	33	10/17/97	XRF	1	Classroom-203		Radiator	Solid	Metal	0.03
80	1957 Bldg.	67	10/17/97	XRF	1	Classroom-204	Bookcase	Shelf	Solid	Wood	0
81	1957 Bldg.	75	10/17/97	XRF	1	Classroom-204	Ceiling		Solid	Concrte	0.03
82	1957 Bldg.	64	10/17/97	XRF	1	Classroom-204	Chalkboard	Rail	Peeling	Wood	0
83	1957 Bldg.	61	10/17/97	XRF	1	Classroom-204	Door	Casing-Lft	Cracked	Metal	0.02
84	1957 Bldg.	62	10/17/97	XRF	1	Classroom-204	Door	Door	Solid	Wood	0
85	1957 Bldg.	63	10/17/97	XRF	1	Classroom-204	Wall	Wall-Upr	Solid	Concrte	0.01
86	1957 Bldg.	65	10/17/97	XRF	1	Classroom-204	Wall	Wall-Lwr	Solid	Concrte	0.11
87	1957 Bldg.	66	10/17/97	XRF	1	Classroom-204		Radiator	Peeling	Metal	0.02
88	1957 Bldg.	39	10/17/97	XRF	1	Classroom-205	Bookcase	Shelf	Solid	Wood	0
89	1957 Bldg.	40	10/17/97	XRF	1	Classroom-205	Bookcase	Inside	Solid	Wood	0
90	1957 Bldg.	78	10/17/97	XRF	1	Classroom-205	Ceiling		Solid	Concrte	0
91	1957 Bldg.	42	10/17/97	XRF	1	Classroom-205	Chalkboard	Rail	Peeling	Wood	0
92	1957 Bldg.	44	10/17/97	XRF	1	Classroom-205	Door	Casing-Rht	Cracked	Metal	0.05
93	1957 Bldg.	45	10/17/97	XRF	1	Classroom-205	Door	Door	Solid	Wood	0
94	1957 Bldg.	43	10/17/97	XRF	1	Classroom-205	Wall	Wall-Upr	Solid	Concrte	0
95	1957 Bldg.	46	10/17/97	XRF	1	Classroom-205	Wall	Wall-Lwr	Solid	Concrte	0.01
96	1957 Bldg.	41	10/17/97	XRF	1	Classroom-205		Radiator	Peeling	Metal	0.03
97	1957 Bldg.	58	10/17/97	XRF	1	Classroom-206	Bookcase	Shelf	Solid	Wood	0
98	1957 Bldg.	76	10/17/97	XRF	1	Classroom-206	Ceiling		Solid	Concrte	0
99	1957 Bldg.	56	10/17/97	XRF	1	Classroom-206	Chalkboard	Rail	Solid	Wood	0
100	1957 Bldg.	54	10/17/97	XRF	1	Classroom-206	Door	Door	Solid	Wood	0
101	1957 Bldg.	55	10/17/97	XRF	1	Classroom-206	Door	Casing-Lft	Cracked	Metal	0.02
102	1957 Bldg.	57	10/17/97	XRF	1	Classroom-206	Wall	Wall-Upr	Solid	Concrte	0.04
103	1957 Bldg.	60	10/17/97	XRF	1	Classroom-206	Wall	Midle Wall	Solid	Concrte	0
104	1957 Bldg.	59	10/17/97	XRF	1	Classroom-206		Radiator	Solid	Metal	0.02
105	1957 Bldg.	47	10/17/97	XRF	1	Classroom-207	Bookcase	Shelf	Solid	Wood	0
106	1957 Bldg.	77	10/17/97	XRF	1	Classroom-207	Ceiling		Solid	Concrte	0
107	1957 Bldg.	49	10/17/97	XRF	1	Classroom-207	Chalkboard	Rail	Cracked	Wood	0
108	1957 Bldg.	51	10/17/97	XRF	1	Classroom-207	Door	Casing-Rht	Cracked	Metal	0.02
109	1957 Bldg.	52	10/17/97	XRF	1	Classroom-207	Door	Door	Solid	Wood	0
110	1957 Bldg.	50	10/17/97	XRF	1	Classroom-207	Wall	Wall-Upr	Solid	Concrte	0
111	1957 Bldg.	53	10/17/97	XRF	1	Classroom-207	Wall	Midle Wall	Solid	Concrte	0.02

Saint Paul Public Schools
 Sheridan Elementary
 Lead-Based Paint Inspection

	A	B	C	D	E	F	G	H	I	J	K
3	Site	Sample #	Date	Analysis	Floor	Area & Room #	Component	Feature	Condition	Substrate	Result
112	1957 Bldg.	48	10/17/97	XRF	1	Classroom-207		Radiator	Solid	Metal	0.05
113	1957 Bldg.	12	10/16/97	XRF	1	Hall-1	Bench		Cracked	Wood	0
114	1957 Bldg.	11	10/16/97	XRF	1	Hall-1	Door	Door	Solid	Metal	0
115	1957 Bldg.	13	10/16/97	XRF	1	Hall-1	Door	Casing-Lft	Peeling	Metal	0.03
116	1957 Bldg.	14	10/16/97	XRF	1	Hall-1	Door	Door	Solid	Wood	0
117	1957 Bldg.	77	10/16/97	XRF	1	Hall-2	Door	Casing-Rht	Cracked	Metal	0.02
118	1957 Bldg.	78	10/16/97	XRF	1	Hall-2	Door	Door	Solid	Wood	0
119	1957 Bldg.	79	10/16/97	XRF	1	Hall-2	Door	Door	Solid	Metal	0
120	1957 Bldg.	80	10/16/97	XRF	1	Hall-2	Door	Casing-Rht	Solid	Metal	0
121	1957 Bldg.	81	10/16/97	XRF	1	Hall-2	Window	Stool	Cracked	Wood	0
122	1957 Bldg.	52	10/16/97	XRF	1	Hall-3	Door	Casing-Rht	Cracked	Metal	0.02
123	1957 Bldg.	53	10/16/97	XRF	1	Hall-3	Door	Door	Solid	Wood	0
124	1957 Bldg.	54	10/16/97	XRF	1	Hall-3	Door	Door	Solid	Metal	0
125	1957 Bldg.	51	10/16/97	XRF	1	Hall-3		Radiator	Cracked	Metal	0.03
126	1957 Bldg.	10	10/16/97	XRF	1	Hopper Room-0	Door	Door	Solid	Metal	>>5.0
127	1957 Bldg.	6	10/16/97	XRF	1	Hopper Room-0	Floor		Peeling	Concrte	0.03
128	1957 Bldg.	9	10/16/97	XRF	1	Hopper Room-0	Stairs	Hand rail	Peeling	Metal	0.03
129	1957 Bldg.	7	10/16/97	XRF	1	Hopper Room-0	Wall	Wall-Lwr	Solid	Concrte	0
130	1957 Bldg.	8	10/16/97	XRF	1	Hopper Room-0	Wall	Wall-Uptr	Solid	Concrte	0
131	1957 Bldg.	90	10/17/97	XRF	1	Outside-0	Floor		Cracked	Concrte	0
132	1957 Bldg.	87	10/17/97	XRF	1	Outside-1	Door	Door	Solid	Metal	0.03
133	1957 Bldg.	88	10/17/97	XRF	1	Outside-1	Door	Door	Cracked	Metal	0.03
134	1957 Bldg.	89	10/17/97	XRF	1	Outside-1	Door	Casing-Lft	Peeling	Metal	0.03
135	1957 Bldg.	86	10/17/97	XRF	1	Outside-1	Stairs	Hand rail	Solid	Metal	0
136	1957 Bldg.	84	10/17/97	XRF	1	Outside-1	Stripe	Yellow	Cracked	Concrte	2.47
137	1957 Bldg.	85	10/17/97	XRF	1	Outside-1	Vehicle	Barrier	Peeling	Metal	1.17
138	1957 Bldg.	6	10/17/97	XRF	1	Restroom-1	Door	Stall Door	Solid	Metal	0.22
139	1957 Bldg.	7	10/17/97	XRF	1	Restroom-1		Radiator	Solid	Metal	0
140	1957 Bldg.	9	10/17/97	XRF	1	Restroom-2	Door	Stall Door	Solid	Metal	0.17
141	1957 Bldg.	10	10/17/97	XRF	1	Restroom-2	Door	Casing-Rht	Cracked	Metal	0.02
142	1957 Bldg.	11	10/17/97	XRF	1	Restroom-2	Door	Door	Solid	Wood	0
143	1957 Bldg.	8	10/17/97	XRF	1	Restroom-2		Radiator	Solid	Metal	0.11
144	1957 Bldg.	12	10/17/97	XRF	1	Restroom-3	Door	Casing-Lft	Cracked	Metal	0.02
145	1957 Bldg.	13	10/17/97	XRF	1	Restroom-3	Door	Door	Solid	Wood	0
146	1957 Bldg.	16	10/17/97	XRF	1	Room-200A	Door	Casing-Lft	Solid	Metal	0.03
147	1957 Bldg.	15	10/17/97	XRF	1	Room-200A	Wall	Midle Wall	Solid	Plaster	0.38
148	1957 Bldg.	17	10/17/97	XRF	1	Room-200A	Wall	Midle Wall	Solid	Drywall	0
149	1957 Bldg.	14	10/17/97	XRF	1	Room-200A		Radiator	Solid	Metal	0.01
150	1957 Bldg.	20	10/17/97	XRF	1	Room-200B	Door	Casing-Lft	Cracked	Metal	0.02
151	1957 Bldg.	21	10/17/97	XRF	1	Room-200B	Door	Door	Solid	Wood	0
152	1957 Bldg.	19	10/17/97	XRF	1	Room-200B	Wall	Midle Wall	Solid	Drywall	0
153	1957 Bldg.	22	10/17/97	XRF	1	Room-200B	Wall	Mural	Solid	Plaster	0.56
154	1957 Bldg.	23	10/17/97	XRF	1	Room-200B	Wall	Mural	Solid	Plaster	0.48
155	1957 Bldg.	24	10/17/97	XRF	1	Room-200B	Wall	Midle Wall	Solid	Plaster	0.47
156	1957 Bldg.	18	10/17/97	XRF	1	Room-200B		Radiator	Solid	Metal	0.01
157	1957 Bldg.	43	10/16/97	XRF	1	Stairwell-1	Door	Door	Peeling	Metal	0.06
158	1957 Bldg.	44	10/16/97	XRF	1	Stairwell-1	Door	Jamb-Lft	Peeling	Metal	0.02
159	1957 Bldg.	46	10/16/97	XRF	1	Stairwell-1	Door	Door	Solid	Metal	0
160	1957 Bldg.	47	10/16/97	XRF	1	Stairwell-1	Door	Casing-Lft	Peeling	Metal	0.06
161	1957 Bldg.	48	10/16/97	XRF	1	Stairwell-1	Door	Door	Cracked	Wood	0
162	1957 Bldg.	45	10/16/97	XRF	1	Stairwell-1	Window	Panel	Solid	Wood	0
163	1957 Bldg.	49	10/16/97	XRF	1	Stairwell-1		Radiator	Peeling	Metal	0.03
164	1957 Bldg.	50	10/16/97	XRF	1	Stairwell-1		Radiator	Solid	Metal	0.01

APPENDIX B INSPECTOR

**Bob Hargrove
MDH Lead Inspector # 416**