



Date: 2/11/20
Performed by: Andrew Tinklenberg
Location: Anthony Middle School
RE: Radon Testing

INTRODUCTION

From February 4 – 7, 2020, radon testing was performed within Anthony Middle School. The testing was performed in frequently-occupied ground contact rooms and rooms immediately above unoccupied spaces (crawl spaces and tunnels) that are in contact with the ground per the Environmental Protection Agency (EPA) and Minnesota Department of Health (MDH) guidelines.

SUMMARY OF FINDINGS

All of the areas that were tested were found to have radon gas levels below 4.0 picocuries per liter of air (pCi/L), which is the EPA and MDH action level. (Note: Rooms B & BB were the blank samples.)

Please refer to the attached AirChek radon testing report and sample diagrams for further information concerning the radon testing, areas that were tested, and the radon levels that were found to be present. Per MDH requirements, this information will be shared with the local regulatory agency (MDH). The information will also be posted on the EH&S webpage available through the main MPS website and maintained on file by EH&S.

If you have any questions regarding this information, please feel free to contact me. Thank you,

Andrew Tinklenberg
Safety Specialist, Environmental Health & Safety
Minneapolis Public Schools
Environmental Health & Safety - Facilities Dept.
andrew.tinklenberg@mpls.k12.mn.us
612-668-0306 Phone
612-668-0310 EH & S General Office
612-668-0275 Fax



I5554 / ANDREW TINKLENBERG / MINNEAPOLIS PUBLIC SCHOOLS


Kit Number	Start Date	Start Time	End Date	End Time	Temp.	Facility	Building	Room	Project ID	Floor	Result
9360392	2020-02-04	7:00 am	2020-02-07	7:00 am	70	MPS	ANTHONY	CUSTODIAN B17	ANTHONY	0	1.5
9360393	2020-02-04	7:00 am	2020-02-07	7:00 am	70	MPS	ANTHONY	OFFICE B19	ANTHONY	0	1.4
9360394	2020-02-04	7:00 am	2020-02-07	7:00 am	68	MPS	ANTHONY	GYM B1 (NORTH)	ANTHONY	0	1.3
9360395	2020-02-04	7:00 am	2020-02-07	7:00 am	68	MPS	ANTHONY	GYM B1 (SOUTH)	ANTHONY	0	0.9
9360396	2020-02-04	7:00 am	2020-02-07	7:00 am	70	MPS	ANTHONY	OFFICE B3	ANTHONY	0	1.1
9360397	2020-02-04	7:00 am	2020-02-07	7:00 am	70	MPS	ANTHONY	OFFICE B5	ANTHONY	0	1.5
9360398	2020-02-04	7:00 am	2020-02-07	7:00 am	68	MPS	ANTHONY	AUX. GYM B7	ANTHONY	0	1.4
9360399	2020-02-04	7:00 am	2020-02-07	7:00 am	68	MPS	ANTHONY	AUX. GYM B8	ANTHONY	0	1.4
9360400	2020-02-04	7:00 am	2020-02-07	7:00 am	70	MPS	ANTHONY	KITCHEN OFFICE	ANTHONY	1	0.5
9360401	2020-02-04	8:00 am	2020-02-07	7:00 am	70	MPS	ANTHONY	OFFICE 023	ANTHONY	1	< 0.3
9360402	2020-02-04	8:00 am	2020-02-07	7:00 am	70	MPS	ANTHONY	CAFETERIA 024	ANTHONY	1	< 0.3
9360403	2020-02-04	8:00 am	2020-02-07	7:00 am	68	MPS	ANTHONY	BAND 025	ANTHONY	1	< 0.3
9360404	2020-02-04	8:00 am	2020-02-07	7:00 am	68	MPS	ANTHONY	CHOIR 027	ANTHONY	1	< 0.3
9360405	2020-02-04	8:00 am	2020-02-07	7:00 am	70	MPS	ANTHONY	OFFICE 036	ANTHONY	1	< 0.3
9360406	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	AUDITORIUM 040	ANTHONY	1	0.6
9360407	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	CLASS 030	ANTHONY	1	< 0.3
9360408	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	CLASS 029	ANTHONY	1	< 0.3
9360409	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	CLASS 001	ANTHONY	1	< 0.3
9360410	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	CLASS 001A	ANTHONY	1	< 0.3
9360411	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	SHOP 001B	ANTHONY	1	< 0.3
9360412	2020-02-04	8:00 am	2020-02-07	8:00 am	71	MPS	ANTHONY	CLASS 002A	ANTHONY	1	< 0.3
9360413	2020-02-04	8:00 am	2020-02-07	8:00 am	72	MPS	ANTHONY	CLASS 002B	ANTHONY	1	< 0.3
9360414	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	CLASS 003A	ANTHONY	1	0.6
9360415	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	OFFICE 003B-1	ANTHONY	1	< 0.3
9360416	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	OFFICE 003B-2	ANTHONY	1	0.6
9360417	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	OFFICE 003B-3	ANTHONY	1	0.9
9360418	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	CLASS 003C	ANTHONY	1	0.5
9360419	2020-02-04	8:00 am	2020-02-07	8:00 am	72	MPS	ANTHONY	CLASS 004	ANTHONY	1	0.8
9360420	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	CLASS 005	ANTHONY	1	0.7
9360421	2020-02-04	8:00 am	2020-02-07	8:00 am	72	MPS	ANTHONY	CLASS 006	ANTHONY	1	0.8
9360422	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	CLASS 007	ANTHONY	1	< 0.3
9360423	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	CLASS 008	ANTHONY	1	0.8
9360424	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	OFFICE 009	ANTHONY	1	0.8
9360425	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	OFFICE 011	ANTHONY	1	0.7
9360426	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	ROOM B	ANTHONY	1	< 0.3

I5554 / ANDREW TINKLENBERG / MINNEAPOLIS PUBLIC SCHOOLS

Kit Number	Start Date	Start Time	End Date	End Time	Temp.	Facility	Building	Room	Project ID	Floor	Result
9360427	2020-02-04	8:00 am	2020-02-07	8:00 am	70	MPS	ANTHONY	ROOM BB	ANTHONY	1	< 0.3

Air Chek 1936 Butler Bridge Rd, Mills River, NC 28759-3892 Phone: (828) 684-0893 Fax: (828) 684-8498

DIAGRAM #2 - RADON SAMPLE LOCATIONS

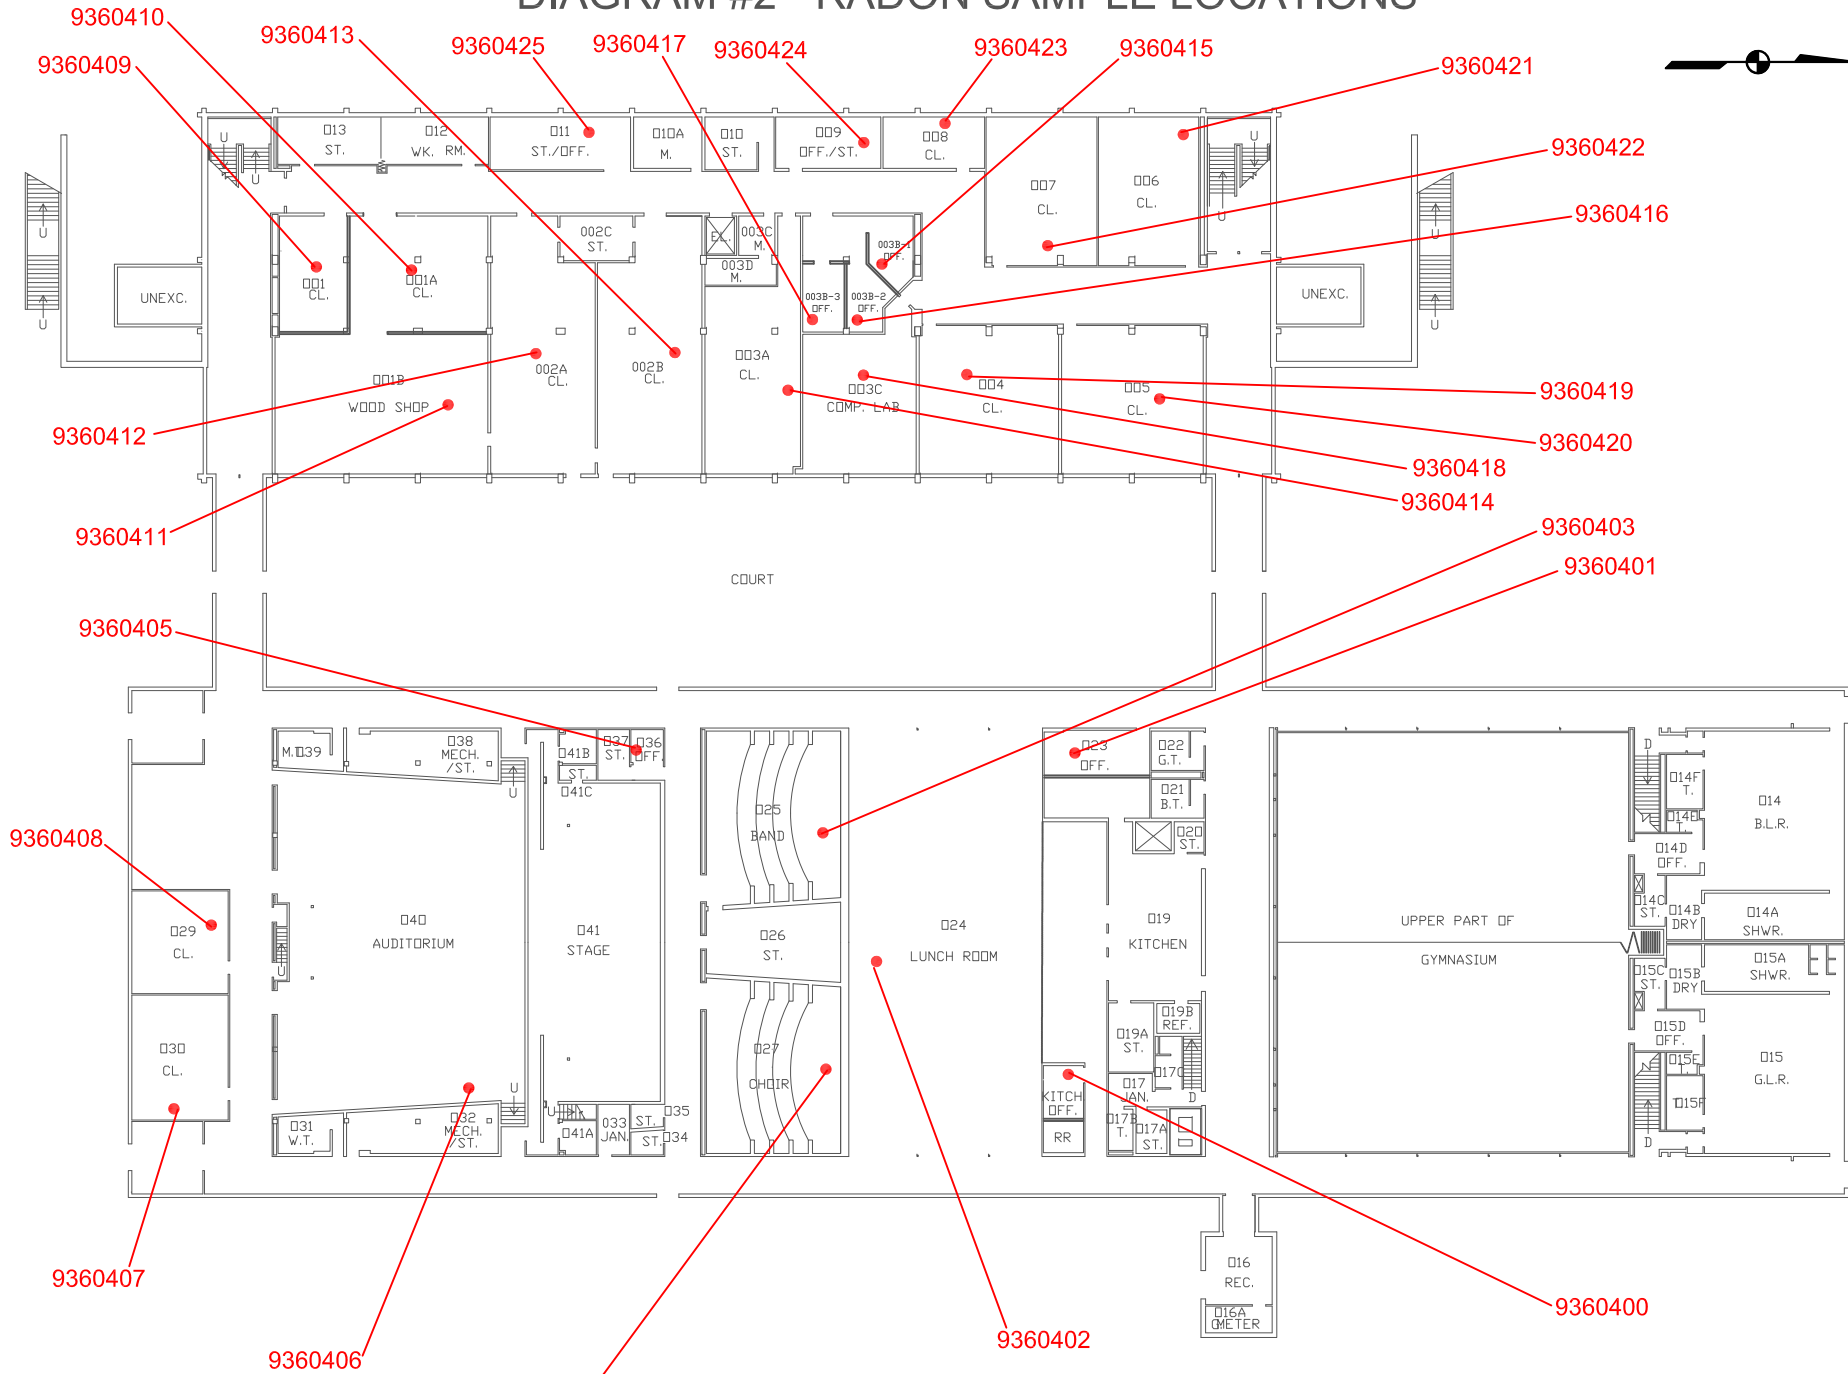

GROUND FLOOR PLAN

PREPARED ON: 2/4/20
 BY: ANDREW TINKLENBERG
 EH&S SAFETY SPECIALIST

ANTHONY MIDDLE SCHOOL
 5757 IRVING AVE. S
 MINNEAPOLIS, MN 55419

MINNEAPOLIS
 PUBLIC SCHOOLS
 Urban Education. Global Citizens.

