

## Kim Moore

---

**From:** Facilities  
**Sent:** Monday, March 27, 2023 3:07 PM  
**To:** harold@alwayspavinginc.com; 'mike@vvexc.com'; ted@jbbostick.net; glenm@vintagepavingco.com  
**Subject:** Addendum No. 2 - Request for Quote for Maintenance Yard Asphalt Repair and Resurface

**The following additions, deletions, modifications, or clarifications shall be made to the appropriate sections of the specifications and shall become a part of the Contract Documents. Bidders shall acknowledge receipt of this Addendum on the Bid form.**

Notice of Bid Changes:

- Area A
  - Remove existing asphalt and associated aggregate base.
  - Place 4 ¾ ” of asphalt over 18” aggregate base compacted to 95% minimum, on subgrade.
  - Provide optional cost for installation of geo fabric.
  - Slope finish to existing drain.
- Area B
  - Remove approximately 300 sq. ft. of existing asphalt and associated aggregate base.
  - Place 4 ¾ ” of asphalt over 18” aggregate base compacted to 95% minimum, on subgrade.
  - Provide optional cost for installation of geo fabric.
  - Slope finish to existing drain.
- Area C
  - Grind 1.5” of approximately 300 sq. ft. and apply asphalt overlay to achieve slope toward existing drain.
- Area D
  - Remove approximately 300 sq. ft. of asphalt and associated aggregate base.
  - Place 2” of asphalt over 6” aggregate base and compacted to 92 % minimum, on subgrade.
  - Slope finish to existing drain.

---

**From:** Facilities  
**Sent:** Tuesday, March 21, 2023 2:17 PM  
**Subject:** RE: Request for Quote for Maintenance Yard Asphalt Repair and Resurface

Hi All,

Just wanted to add that quotes are to be received by Tuesday, 4 April 2023, by 2 pm. They can be emailed to [Facilities@travisusd.org](mailto:Facilities@travisusd.org).

Thanks,

Travis USD Facilities Department

---


**From:** Tracey Canady  
**Sent:** Tuesday, March 21, 2023 12:40 PM  
**Subject:** Request for Quote for Maintenance Yard Asphalt Repair and Resurface

Good Afternoon,

Travis Unified School District request a quote to repair and resurface four areas at our District Complex and Maintenance Yard, request number 23030. This solicitation will become an addendum to any resultant contract.

**The repair consists of the following:**

- Area A:
  - Remove approximately 10,000 sq ft of existing asphalt
  - A portion of this will need the subsurface recompacted to support bus traffic
  - Remove top 3 inches in the remaining area and resurface.
- Area B:
  - Remove approximately 300 sq ft of existing asphalt
  - Compact and resurface to match existing
- Area C:
  - Remove approximately 225 sq ft of existing asphalt
  - Compact and resurface to match existing
  - Slope to allow water runoff towards drain
- Area D:
  - Remove approximately 300 sq ft of existing asphalt
  - Compact and resurface to match existing
- Recycled asphalt is accepted.
- Existing asphalt can be pulverized and left on-site

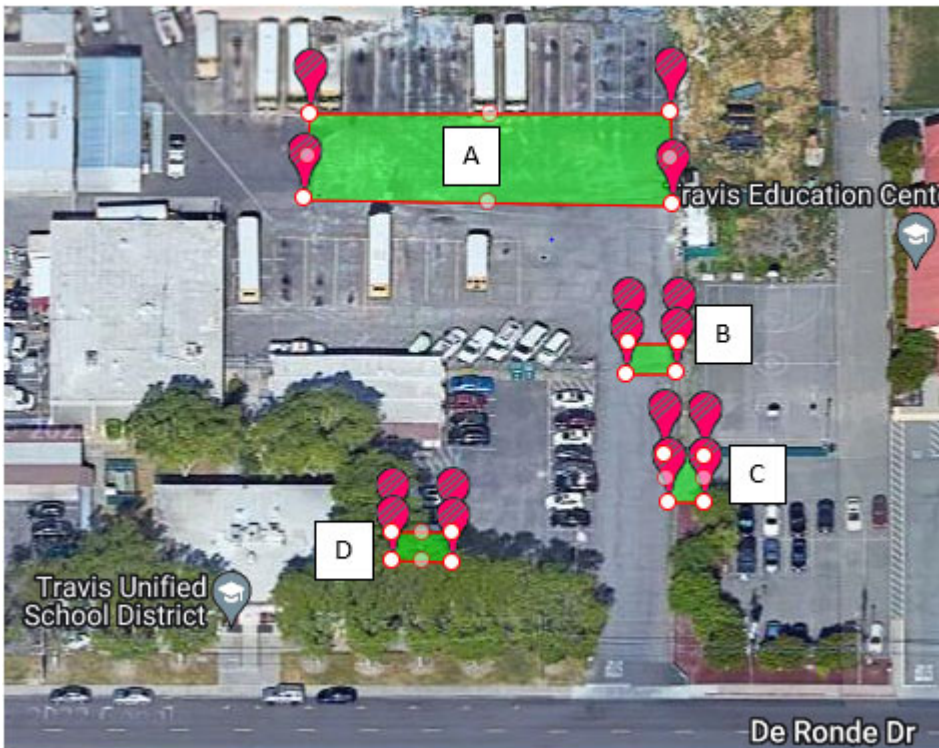

**MANDATORY JOB WALK AND INQUIRIES**

- DATE: **Monday, 27 March 2023**
- TIME: **10:00 AM**
- LOCATION: **2751 De Ronde Dr, Fairfield, CA 94533**
- MEETING PLACE: **At the gate going into the maintenance/bus area by area B.**

- INQUIRIES: Send to [Facilities@travisusd.org](mailto:Facilities@travisusd.org)

**The following apply:**

- Prevailing Wages will apply and shall be annotated on quotes prior to submittal.
- Payment and performance bonds are required for bids over \$25,000.
- All Contractors shall be required to make their own site inspection, their own measurements and verify all field conditions.

Thanks,

Travis USD Facilities Department