


WORK TO BE DONE IN THIS AREA. REFER TO ENLARGEMENT ON RIGHT.

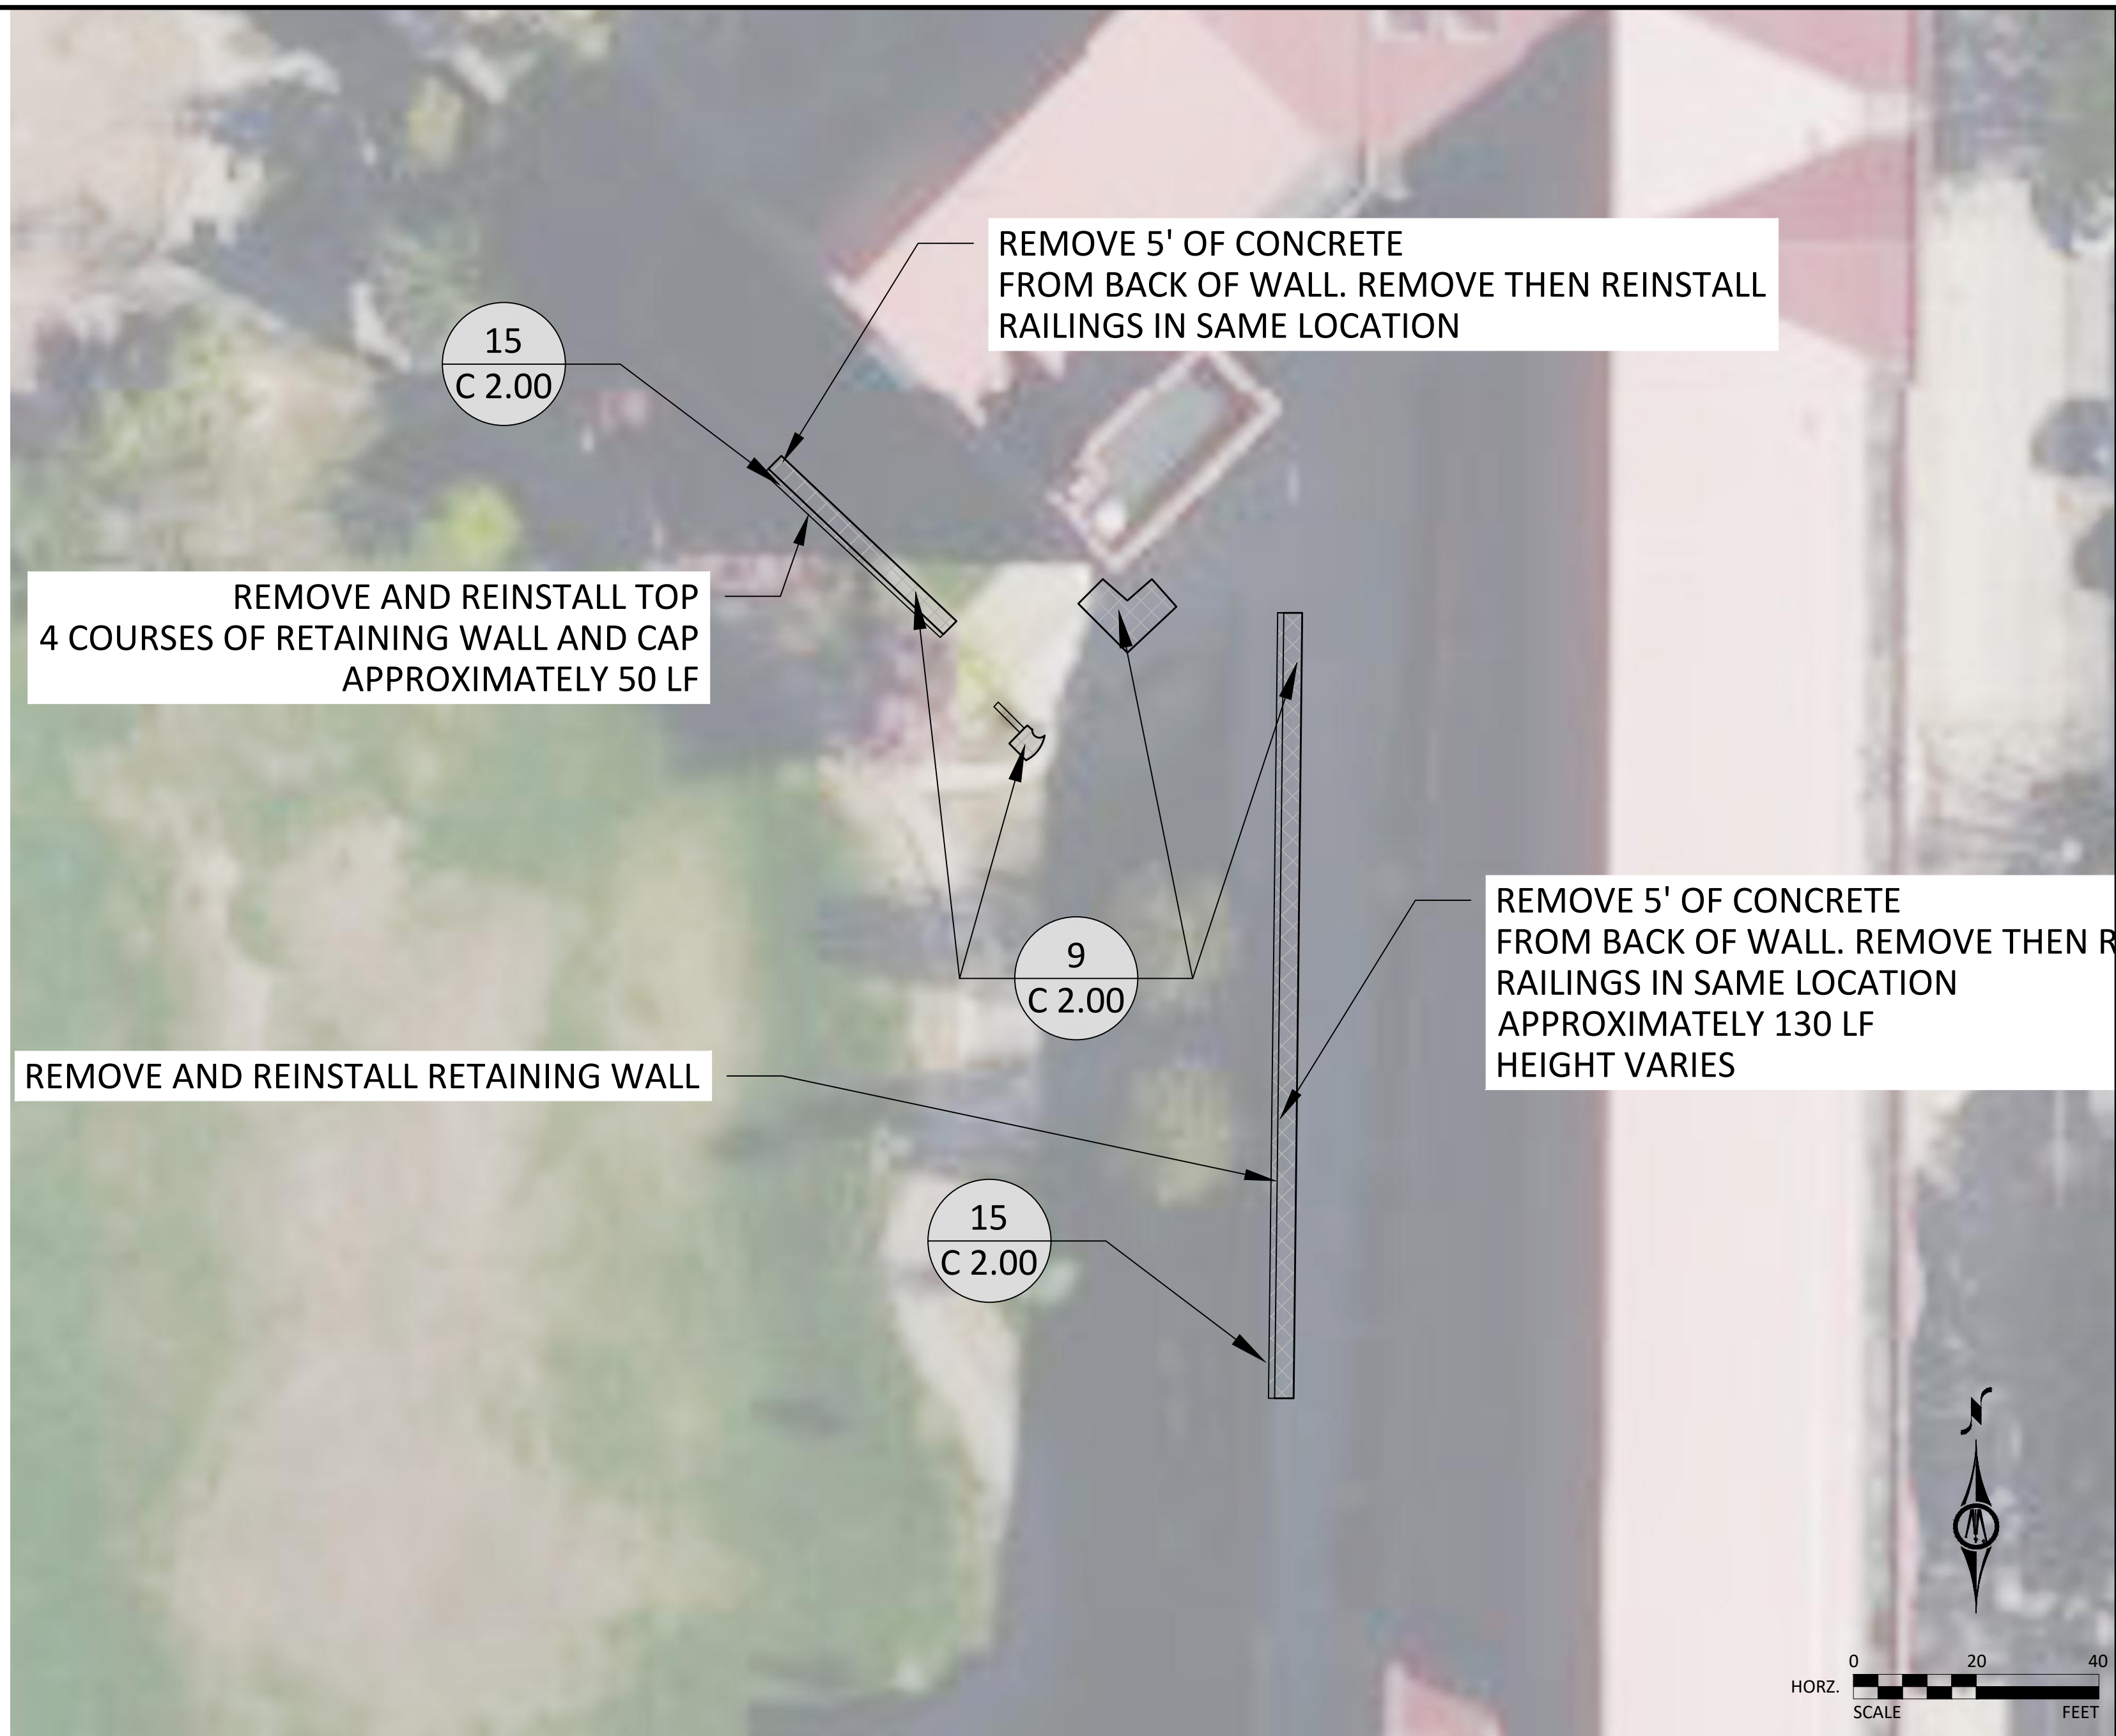

15  
C 2.00  
REMOVE 5' OF CONCRETE FROM BACK OF WALL. REMOVE THEN REINSTALL RAILINGS IN SAME LOCATION

REMOVE AND REINSTALL TOP 4 COURSES OF RETAINING WALL AND CAP APPROXIMATELY 50 LF

9  
C 2.00  
REMOVE 5' OF CONCRETE FROM BACK OF WALL. REMOVE THEN REINSTALL RAILINGS IN SAME LOCATION APPROXIMATELY 130 LF HEIGHT VARIES

REMOVE AND REINSTALL RETAINING WALL

15  
C 2.00

**WHITTIER SCHOOL QUANTITIES**

THE CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS, INCLUDING DETERMINATION OF ALL QUANTITIES, PRIOR TO THE WORK. BASE BID AMOUNT INCLUDES ALL WORK TO ACCOMPLISH THAT WHICH IS ILLUSTRATED ON THE PLAN, UNLESS OTHERWISE NOTED.

"ESTIMATED" QUANTITIES PROVIDED ARE FOR THE CONTRACTOR'S REFERENCE ONLY. "ASSUMED" QUANTITIES SHALL BE INCLUDED IN THE CONTRACTOR'S BASE BID COST. FINAL QUANTITIES WILL BE ADJUSTED USING UNIT PRICES.

ESTIMATED CONCRETE WALK REPAIR = 70 S.Y.

ESTIMATED SEGMENTAL RETAINING WALL REPAIR = 180 L.F.

**LEGEND**


- REFERENCE KEY TO SITE DETAILS  
DETAIL I.D. NUMBER (TOP)  
DETAIL SHEET NUMBER (BOTTOM)
- SEGMENTAL RETAINING WALL REPAIR 15  
C 2.00
- CONCRETE WALK REPAIR 9  
C 2.00

**NOTES**

1. REFER TO SHEET T1.00, TITLE SHEET, FOR RELATED GENERAL NOTES.
2. CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS PRIOR TO THE BIDDING.
3. CONTRACTOR SHALL BE RESPONSIBLE FOR SHOOTING AND RECORDING EXISTING PAVEMENT SURFACE AND WALL ELEVATIONS. ONCE BITUMINOUS AND/OR CONCRETE PAVEMENT AND WALL UNITS HAVE BEEN REMOVED, THE CONTRACTOR SHALL BE RE-ESTABLISH ELEVATIONS THAT WILL ENSURE POSITIVE DRAINAGE AS APPROPRIATE.
4. ALL RAILINGS TO BE SAVED AND REINSTALLED.

© Bolton & Menk, Inc. 2024. All Rights Reserved. P:\ASD1\_ED\_MINN\21131100\CAD\3D\31100\_C\_PLOT\_A1.dwg 1/12/2024 2:24:59 PM

I HEREBY CERTIFY THAT THIS PLAN, SPECIFICATION, OR REPORT WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY LICENSED LANDSCAPE ARCHITECT UNDER THE LAWS OF THE STATE OF MINNESOTA.

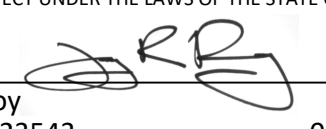Jay R. Pomeroy   
LIC. NO. 23543 DATE 01/12/2024



7575 GOLDEN VALLEY RD, SUITE 200  
GOLDEN VALLEY, MINNESOTA 55427  
Phone: (763) 544-7129  
Email: GoldenValley@bolton-menk.com  
www.bolton-menk.com

DESIGNED	NO.	ISSUED FOR	DATE
CDL			
CDL			
CHECKED			
JRP			
CLIENT PROJ. NO.	24-2411		

MINNEAPOLIS, MN  
FY24 SITE WORK  
WHITTIER SCHOOL

ALTERNATE 7

SHEET

C 1.90