

*Sun Nuclear Radon Sentinel© Continuous Radon Monitor*

---

**Site Address:**

**Inspection Date:**

12/15/2025 11:00 AM

**Report Prepared For:**

**Report Prepared By:**

**License Number:**

# Sun Nuclear Radon Sentinel© Continuous Radon Monitor

**Model Number: 1030**

Serial Number: 238515017

Calibration Date: 10/31/2024

Calibration Factors: [1: 2.44] [2: 2.36] [3: 2.42] [4: 2.44] [5: 2.39] [6: 2.43]

**Test Summary:**

Start Time: 12/15/2025 11:00 AM

Units: pCi/l

Hours Delayed: 0 hour(s)

Test Duration: 999 hour(s)


Measurement Interval: 1 hour(s)

Measurements: 50

Mitigation System is not installed on property.

Overall Average: 0.7 pCi/l

EPA Average: 0.8 pCi/l

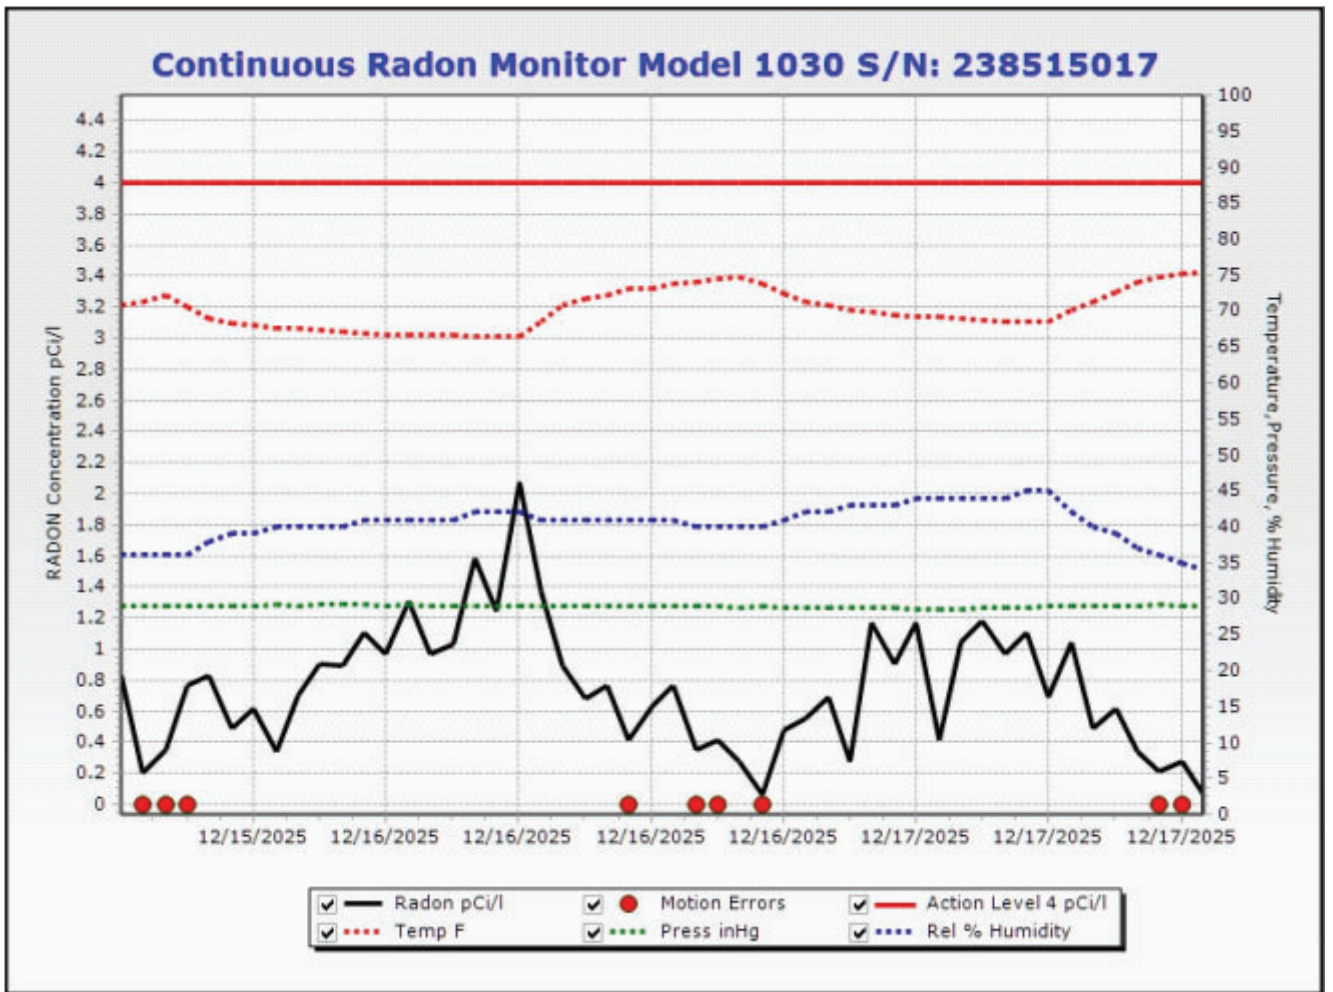

Date/Time		pCi/l	Temp(F)	Press (inHg)	Humidity(%)	Flags
12/15/2025	12:00 PM	0.80	70.90	29.0	36.0	0
12/15/2025	1:00 PM	0.20	71.20	29.0	36.0	M
12/15/2025	2:00 PM	0.30	72.10	29.0	36.0	M
12/15/2025	3:00 PM	0.80	70.50	29.0	36.0	M
12/15/2025	4:00 PM	0.80	68.90	29.0	38.0	0
12/15/2025	5:00 PM	0.50	68.20	29.0	39.0	0
12/15/2025	6:00 PM	0.60	68.00	29.0	39.0	0
12/15/2025	7:00 PM	0.30	67.60	29.1	40.0	0
12/15/2025	8:00 PM	0.70	67.50	29.0	40.0	0
12/15/2025	9:00 PM	0.90	67.30	29.1	40.0	0
12/15/2025	10:00 PM	0.90	67.10	29.1	40.0	0
12/15/2025	11:00 PM	1.10	66.90	29.1	41.0	0
12/16/2025	12:00 AM	1.00	66.70	29.0	41.0	0
12/16/2025	1:00 AM	1.30	66.70	29.1	41.0	0
12/16/2025	2:00 AM	1.00	66.60	29.0	41.0	0
12/16/2025	3:00 AM	1.00	66.60	29.0	41.0	0
12/16/2025	4:00 AM	1.60	66.40	29.0	42.0	0
12/16/2025	5:00 AM	1.20	66.40	29.0	42.0	0
12/16/2025	6:00 AM	2.10	66.40	29.0	42.0	0
12/16/2025	7:00 AM	1.40	68.50	29.0	41.0	0
12/16/2025	8:00 AM	0.90	70.70	29.0	41.0	0
12/16/2025	9:00 AM	0.70	71.80	29.0	41.0	0
12/16/2025	10:00 AM	0.80	72.10	29.0	41.0	0
12/16/2025	11:00 AM	0.40	73.20	29.0	41.0	M
12/16/2025	12:00 PM	0.60	73.20	28.9	41.0	0
12/16/2025	1:00 PM	0.80	73.80	29.0	41.0	0
12/16/2025	2:00 PM	0.30	74.10	28.9	40.0	M
12/16/2025	3:00 PM	0.40	74.50	28.9	40.0	M
12/16/2025	4:00 PM	0.30	74.80	28.8	40.0	0
12/16/2025	5:00 PM	0.10	73.80	28.9	40.0	M
12/16/2025	6:00 PM	0.50	72.30	28.8	41.0	0
12/16/2025	7:00 PM	0.60	71.20	28.8	42.0	0
12/16/2025	8:00 PM	0.70	70.70	28.8	42.0	0
12/16/2025	9:00 PM	0.30	70.20	28.7	43.0	0
12/16/2025	10:00 PM	1.20	69.80	28.7	43.0	0
12/16/2025	11:00 PM	0.90	69.40	28.7	43.0	0
12/17/2025	12:00 AM	1.20	69.30	28.6	44.0	0
12/17/2025	1:00 AM	0.40	69.10	28.6	44.0	0
12/17/2025	2:00 AM	1.00	68.90	28.6	44.0	0
12/17/2025	3:00 AM	1.20	68.70	28.7	44.0	0
12/17/2025	4:00 AM	1.00	68.50	28.7	44.0	0
12/17/2025	5:00 AM	1.10	68.40	28.8	45.0	0
12/17/2025	6:00 AM	0.70	68.40	28.9	45.0	0
12/17/2025	7:00 AM	1.00	70.00	29.0	42.0	0
12/17/2025	8:00 AM	0.50	71.20	29.0	40.0	0
12/17/2025	9:00 AM	0.60	72.70	29.0	39.0	0
12/17/2025	10:00 AM	0.30	74.10	29.0	37.0	0
12/17/2025	11:00 AM	0.20	74.80	29.1	36.0	M
12/17/2025	12:00 PM	0.30	75.20	29.0	35.0	M
12/17/2025	1:00 PM	0.10	75.40	29.0	34.0	0

Over All Average:0.7 pCi/l EPA Average:0.8 pCi/l

## *Radon Risk Information*

---

Radon is the second leading cause of lung cancer after smoking. The US EPA and Surgeon General strongly recommend taking further action when a homes radon test results are 4.0 pCi/l or greater. The concentration of radon in the home is measured in picocuries per liter of air (pCi/l). Radon levels less than 4.0 pCi/l still pose some risk and in many cases may be reduced. If the radon level in the home is between 2.0 and 4.0 pCi/l, the EPA still recommends that you consider fixing the home. The average indoor radon level is estimated to be about 1.3 pCi/l; roughly 0.4 pCi/l of radon is normally found in the outside air. The higher the home radon level, the greater the health risk. Even homes with very high radon levels can be reduced to below 4.0 pCi/l and many homes can be reduced to 2.0 pCi/l or less.

## *Understanding Time-Sensitive Testing Protocols*

---

It is necessary to fix the home when a single test averages 4.0 pCi/l or more.  
It is a good idea to fix the home when a single test averages between 2.0 and 4.0 pCi/l.  
If a test result averages less than 4.0 pCi/l, it is recommended to confirm the low result by testing again at least every two years and whenever significant changes to the home structure or mechanical systems occur. Test during different seasons and different weather conditions to reduce your risk of exposure.