

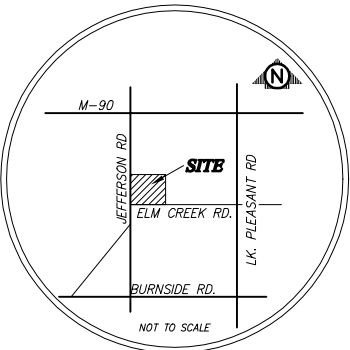




- CONSTRUCTION NOTES:
1. SAWCUT EXISTING PAVEMENT EDGE.
 2. BUTT-JOINT AT EXISTING EDGE OF PAVEMENT. *LOCATION MAP*
 3. ALL TOPSOIL MUST BE REMOVED IN THE AREA OF THE PAVEMENT AND SIDEWALK.
 4. TOPSOIL CAN REMAIN "ON-SITE" AS DIRECTED BY THE CLIENT.
 5. ALL DISTURBED AREAS MUST BE TOPSOILED, SEEDED, AND MULCH BLANKET.
 6. ALL PARKING MUST BE STRIPED IN ACCORDANCE WITH EXISTING PARKING AREA.
 7. CONTRACTOR BID INCLUDES EVERYTHING REQUIRED FOR CONSTRUCTION OF PARKING LOT INCLUDING RESTORATION.


APPROXIMATE QUANTITIES		
QUANTITIES FOR INFORMATION ONLY. CONTRACTOR TO VERIFY PRIOR TO BID.		
CONSTRUCTION ITEM	QUANTITY	UNIT
Remove Pavement	750	yd
HMA Surface (440#/syd)	1,160	ton
Aggregate Base (22A)	1,910	ton
Thickened Edge Sidewalk	1,110	sft
Evergreen Tree (8' hgt)	16	ea
Split Rail Fencing	245	ft
Concrete Pavement	100	sft
Site Prep./Land Balance	1	Isum
Restoration	1	Isum

- PROPOSED 6' WIDE, THICKENED EDGE SIDEWALK
- PROPOSED HMA SURFACE (440#/SYD)
- PROPOSED REMOVE EX. ASPHALT, NEW HMA SURFACE (440#/SYD)
- PROPOSED EVERGREEN TREE, 8' hgt. (Species to be approved by client)

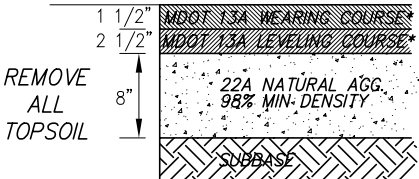

SUBBASE SHALL BE FIRM EARTH FREE OF TOPSOIL AND SOFT SPOTS AND SHALL BE COMPACTED TO 95% DENSITY.
*CONTRACTOR MAY PROPOSE ALTERNATIVE MATERIAL FOR APPROVAL BY CLIENT.

PARKING LOT PAVEMENT SECTION

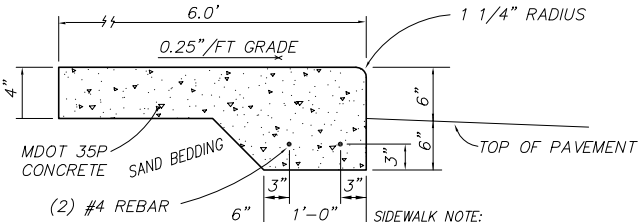

THICKENED EDGE SIDEWALK DETAIL

PREPARED BY:
DAVIS LAND SURVEYING & ENGINEERING, P.C.
415 W. NEPESING STREET
LAPEER, MICHIGAN 48446
PHONE: (810) 667-6789
FAX: (810) 667-8980

PREPARED FOR:
NORTH BRANCH AREA SCHOOLS
ELEMENTARY PARKING LOT EXPANSION
XX 1/4, SECTION X, T4N-R4E
XXXX TWP., XXXXX COUNTY, MI

