




1A SECOND FLOOR
SCALE: NOT TO SCALE

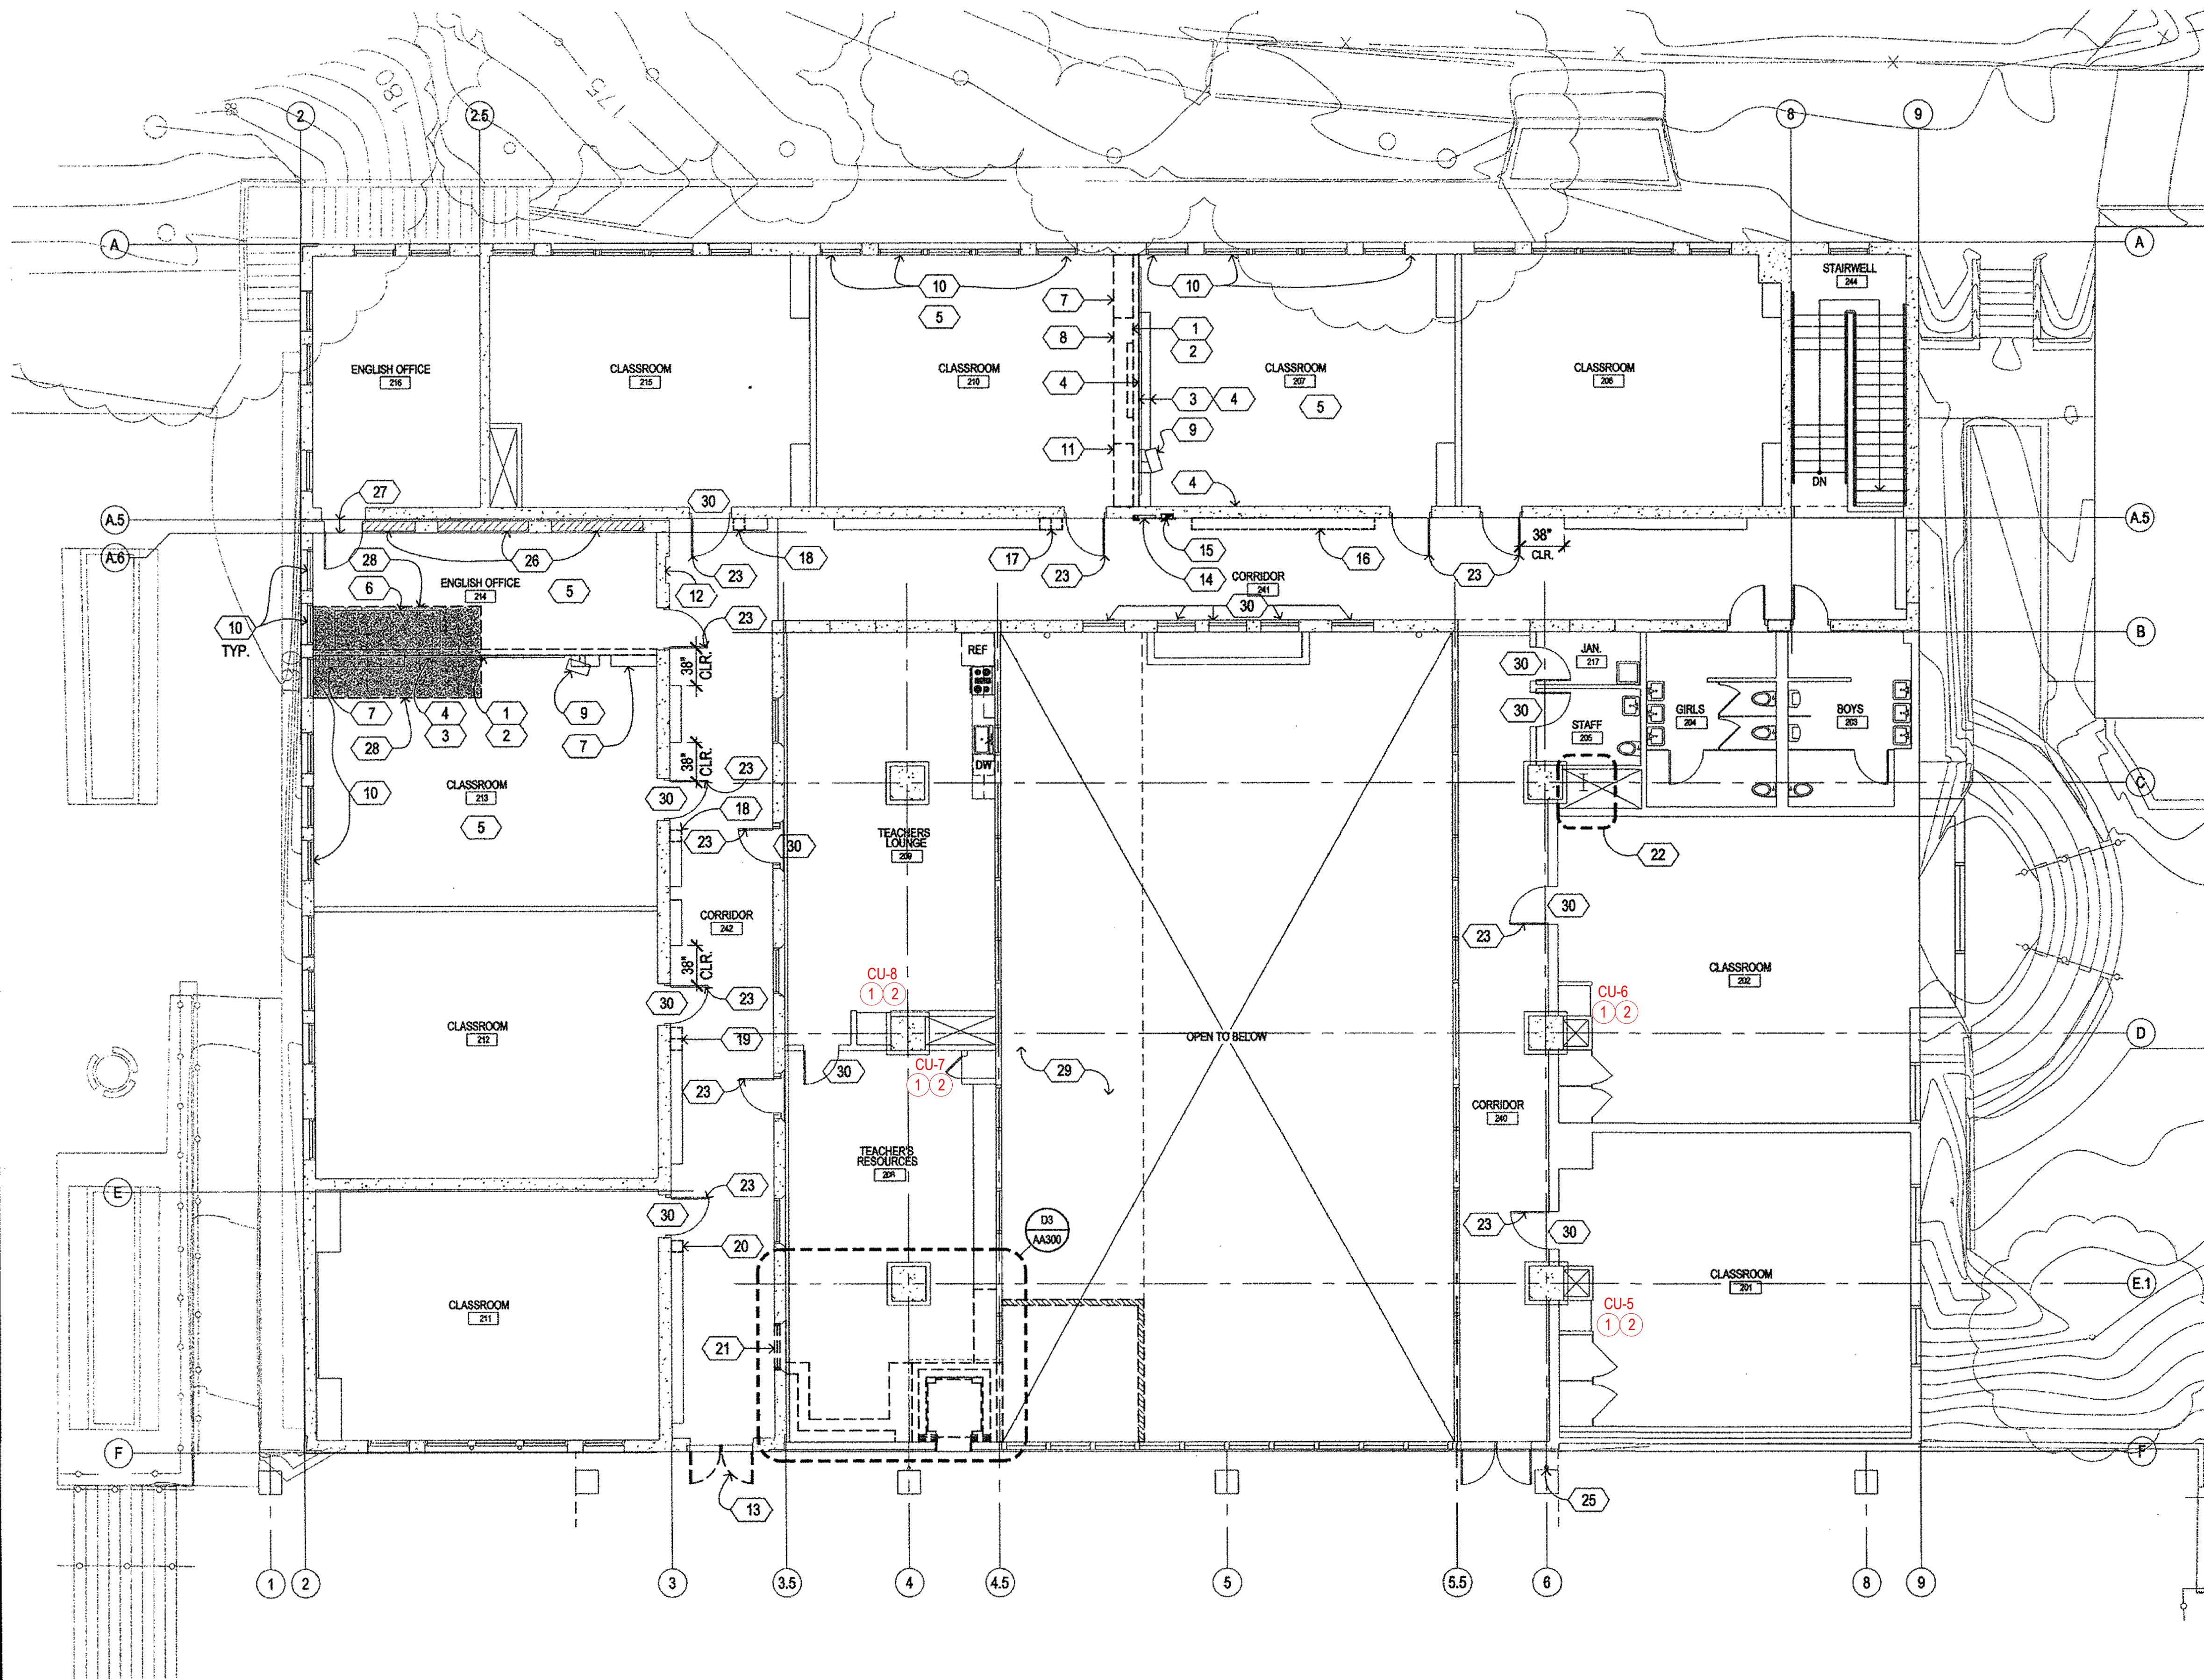

LEGEND:

- DEMO WALL
- TEMPORARY WALL
- (E) WALL
- (E) CONC WALL

SHEET NOTES:

1. REMOVE PORTION (E) WOOD JOIST CEILING TO INSTALL (E) SHEARWALL. SHORE AS REQUIRED.
2. REMOVE (E) WOOD STUD WALL.
3. REMOVE (E) PROJECTION SCREEN, STORE FOR REINSTALL.
4. REMOVE (E) WHITEBOARD / TACKBOARD, STORE FOR REINSTALL.
5. REMOVE (E) CARPET, STORE FOR REINSTALL.
6. REMOVE (E) CABINET, STORE FOR REINSTALL.
7. REMOVE (E) BASEWORK, STORE FOR REINSTALLATION.
8. REMOVE (E) TURNED SOFFIT.
9. REMOVE (E) TV AND WALL MOUNT BRACKET, STORE FOR REINSTALLATION.
10. REMOVE ALL WINDOW BLINDS IN ROOMS WHERE CONSTRUCTION OCCURS AND STORE FOR REINSTALLATION.
11. REMOVE (E) CLOSET, DOOR, AND FRAME.
12. PROTECT (E) HISTORIC TILE ABOVE FROM DAMAGE. SUBMIT PROTECTION PLAN FOR REVIEW PRIOR TO DEMOLITION WORK.
13. REMOVE (E) DOORS AND CENTER POST.
14. REMOVE FIRE HOSE VALVE, GAS WATER PIPE, DEMO ABOVE.
15. REMOVE (E) FIRE EXTINGUISHER AND CABINET.
16. REMOVE LOCKERS AND RELOCATE TO ACHIEVE 48" CLEARANCE AT FULL SIDE OF DOOR, SALVAGE FOR REINSTALLATION AT NEW LOCATION.
17. REMOVE TWO SETS OF TWO TIER LOCKERS TO ACHIEVE 48" CLEARANCE AT FULL SIDE OF DOOR AND SALVAGE FOR REINSTALLATION AT NEW LOCATION.
18. REMOVE ONE SET OF TWO TIER LOCKERS AND SALVAGE FOR REINSTALLATION TO NEW LOCATION NOTED.
19. REMOVE TWO SETS OF TWO TIER LOCKERS AND RELOCATE TO NEW LOCATION NOTED. MOVE ENTIRE RUN OF LOCKERS REMAINING NORTHWARD TO ACHIEVE 60" CLEARANCE WHERE NOTED.
20. REMOVE ONE SET OF TWO TIER LOCKERS AND RELOCATE TO NEW LOCATION NOTED. MOVE ENTIRE RUN OF LOCKERS REMAINING SOUTHWARD APPROX 8" INCHES TO ACHIEVE 18" CLEARANCE WHERE NOTED.
21. REMOVE (E) WINDOW, SAWCUT CONCRETE AND REMOVE WALL BELOW WINDOW FOR (E) DOOR OPENING.
22. REMOVE WALL & FLOOR FINISHES AS REQUIRED TO ACCOMPLISH SEISMIC WORK, SEE DET 010-1E.
23. REMOVE (E) HIGH DOWN DOOR STOP.
24. NOT USED.
25. NOT USED.
26. (E) BRICK WALL.
27. REMOVE (E) DOOR AND FRAME, SALVAGE FOR REINSTALLATION.
28. REMOVE PORTION OF (E) CONC FLOOR SLAB PER STRUCTURAL DWGS.
29. TOP OF CONTAINMENT AREA BELOW.
30. SEAL DOOR OPENING W/ 40 MIL PLASTIC & TAPE AIRTIGHT.

1. INSTALL NEW PEARL ECONOMIZER CONTROLLERS FOR NEW O.A. DAMPERS. RE-USE EXISTING PELICAN T-STATS FOR CONTROLS.
2. INSTALL NEW BELIMO LOW VOLTAGE ACTUATOR FOR CONTROL OF OUTSIDE AIR DAMPER.

DATE	DESCRIPTION



PROJECT TITLE:

**Quad / Student Center
Seismic Strengthening/
Modernization Project**


Piedmont High School
800 Magnolia Avenue
Piedmont, California
Piedmont Unified School District

100% DSA SUBMITTAL
2/4/09

BASE BID #1

SCALE: 1/8" = 1'

0 3 6 12 24

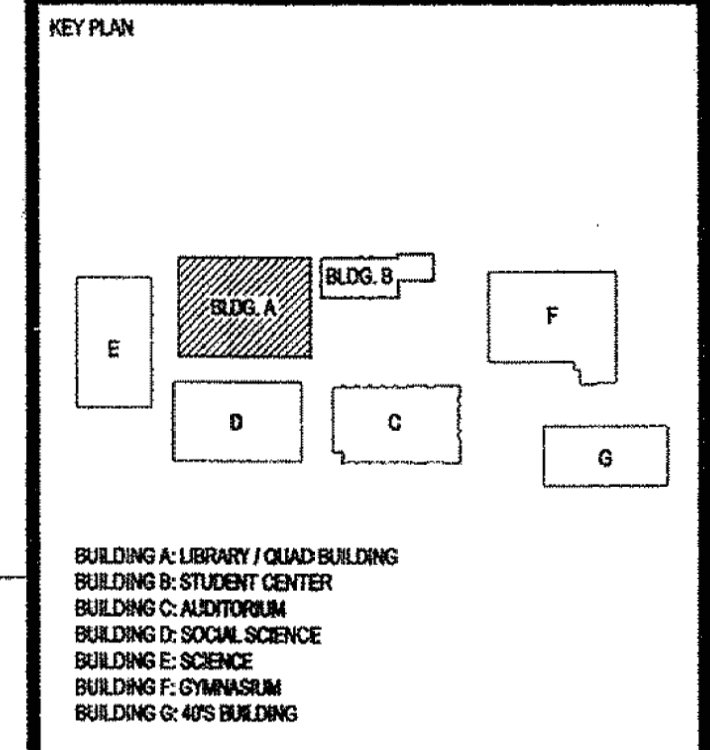

BUILDING A: LIBRARY / QUAD BUILDING
BUILDING B: STUDENT CENTER
BUILDING C: AUDITORIUM
BUILDING D: SOCIAL SCIENCE
BUILDING E: SCIENCE
BUILDING F: GYMNASIUM
BUILDING G: OPS BUILDING

SHEET TITLE:

**SECOND FLOOR
BASE BID #1**

**BUILDING A:
QUAD / LIBRARY**

PROJECT NUMBER: 0629 PHS	SHEET NUMBER:
CONSTRUCTION ISSUE DATE:	
SCALE: AS NOTED	
DRAWN: KIC, MEG, LON	
PLOT: 3X-00-00	
ALL DRAWINGS AND WRITTEN MATERIAL APPLYING HEREON CONSTITUTE THE ORIGINAL AND UNREVOKED WORK OF THE ARCHITECT AND NO PART MAY NOT BE REPRODUCED, COPIED, OR DISCLOSED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT.	

AA201

