REVISED LIMITED NESHAP PRE-RENOVATION HAZARDOUS BUILDING MATERIALS SURVEY REPORT

for

Old Greenwich School
285 Sound Beach Avenue
Greenwich, Connecticut 06870

Prepared For:

David J. Stein, AIA
Principal
Silver/Petrucelli + Associates
3190 Whitney Avenue
Building 2
Hamden, CT 06518-2340

Prepared By:

Langan CT, Inc.
555 Long Wharf Drive
New Haven, CT 06511

Matthew A. Myers
Senior Project Manager

13 September 2023
140265802

LANGAN

TABLE OF CONTENTS

Page No.

ACRONYMS ..... **ii**

1.0 INTRODUCTION **1**

2.0 ASBESTOS-CONTAINING MATERIALS **2**

3.0 LEAD-BASED PAINT XRF SCREENING **23**

4.0 PCB SEALANT SOURCE MATERIALS **25**

5.0 UNIVERSAL WASTE ASSESSMENT **28**

6.0 CONCLUSIONS AND RECOMMENDATIONS **28**

7.0 LIMITATIONS **30**

LIST OF TABLES

Table 1 Summary of Asbestos-Containing Materials
Table 2 Summary of Non-Asbestos-Containing Materials
Table 3 XRF Lead Based Paint Screening Results
Table 4 Summary of Assumed PCB Source Sealant Materials

LIST OF APPENDICES

Appendix A Asbestos Analytical Laboratory Results and Chain-of-Custody
Appendix B XRF Field Data Sheets
Appendix C Building Drawings
Appendix D Langan Certifications and Accreditations

ACRONYMS

US EPA	United States Environmental Protection Agency
AHERA	Asbestos Hazard Emergency Response Act
OSHA	Occupational Safety and Health Administration
CFR	Code of Federal Regulation
NESHAP	National Emission Standards for Hazardous Air Pollutants
HUD	Housing and Urban Development
CT DPH	Connecticut Department of Public Health
CTDEEP	Connecticut Department of Energy and Environmental Protection
RCRA	Resource Conservation and Recovery Act
PLM	Polarized Light Microscopy
TEM	Transmission Electron Microscopy
ACM	Asbestos Containing Materials
HBM	Hazardous Building Materials
LBP	Lead-Based Paint
PCB	Polychlorinated Biphenyls
SF	Square Feet
LF	Linear Feet
ppm	Parts per million
mg/cm^2	Milligrams per square centimeter
XRF	X-ray Fluorescence
TCLP	Toxicity Characteristic Leaching Procedure
AAS	Atomic Absorption Spectrometry

1.0 INTRODUCTION

Langan CT, Inc. (Langan) prepared this revised limited National Emissions Standards for Hazardous Air Pollutants (NESHAP) Pre-Renovation Hazardous Building Materials (HBM) Survey Report on behalf of the Town of Greenwich and Silver/Petrucelli + Associates to identify hazardous building materials that may exist at Old Greenwich School, 285 Sound Beach Avenue, Greenwich, Connecticut. The school was constructed in 1902 with additions in 1925, 1950, 1957 and 1995. The school is an approximately 68,500 square-foot (SF) three-story structure with classrooms, offices, gymnasium, media center, kitchen, cafeteria, toilet rooms, storage rooms, boiler/mechanical rooms, attic and tunnel/crawl space areas. The objectives of this survey/report is to identify the presence or absence of accessible asbestos-containing materials (ACM), lead-based paint (LBP), suspect assumed Polychlorinated biphenyl (PCB) containing sealant compounds and universal waste so these materials can be properly quantified and assessed in support of planned renovation of the building.

Details pertaining to the building subject to this survey are summarized in the following table.

PROJECT INFORMATION

Client Name:	Silver/Petrucelli + Associates 3190 Whitney Avenue Building 2 Hamden, CT 0518-2340	Property Visit Date:	10 – 13 April 2023 9 and 18 August 2023
Professional's Project #:	140265802	Construction Dates:	Original Building: 1902 Additions: 1925, 1950, 1957 and 1995
Consultant's Project Manager:	Matthew A. Myers	No. Buildings:	One
Phone No.:	203-562-5571	No. of Stories:	Three
Email:	mmyers@langan.com	Bldgs. Gross Footage:	68,500 Square Feet
Property Address:	285 Sound Beach Avenue		
Property Town, State:	Greenwich, Connecticut	Property Use:	Public School

The following sections summarize the HBM findings for the building surveyed.

2.0 ASBESTOS-CONTAINING MATERIALS

Terminology

Suspect Asbestos-Containing Materials

Asbestos was historically used in certain types of construction and building materials. Until a material is examined by using polarized light microscopy (PLM) or a similar technique, the building material is considered as a suspect asbestos-containing material. A few examples of these materials include wall and ceiling plasters, sheetrock/taping compound, flooring materials, ceiling panels, thermal system insulation, fireproofing insulation, adhesives, roofing materials, damp-proofing/waterproofing materials, caulking and glazing compounds, etc. Any suspect ACM and/or building material of unknown asbestos content should be assumed to be an asbestos containing material and handled and disposed of accordingly. Demolition, renovation, maintenance or daily activities should not disturb building materials that are found to contain asbestos, assumed to contain asbestos or that have not been tested for possible asbestos content.

Asbestos–Containing Material

A material with an asbestos concentration greater than 1% by weight is considered an ACM by the United States Environmental Protection Agency (EPA). Thus, a material which contains asbestos in concentrations greater than 1% by weight is considered "positive" while a material that does not contain asbestos or asbestos is detected in concentrations less than 1% by weight is considered "negative". The Connecticut Department of Public Health (CT DPH) revised the definition of an asbestos-containing material to be a concentration equal to or greater than 1% by weight. However, the Occupational Safety and Health Administration (OSHA) considers any amount of asbestos as regulated and some landfills/states consider building materials containing less than 1% asbestos as regulated asbestos-containing waste.

Regulatory Guidelines and Requirements

Federal

In accordance with the Clean Air Act (CAA), the U.S. Environmental Protection Agency established the National Emission Standards for hazardous Air Pollutants to protect the public from exposure to airborne pollutants. Asbestos was one of the air pollutants, which was addressed under the NESHAP 40 Code of Federal Regulations (CFR) Part 61. The purpose of the asbestos NESHAP regulations is to protect the public health by minimizing the release of asbestos when facilities, which contain ACM, are being renovated or demolished. EPA is

responsible for enforcing regulations related to asbestos during renovation and demolition activities, however, the CAA allows the EPA to delegate this authority to state and local agencies. Even after EPA delegates responsibility to a state or local agency, EPA retains the authority to oversee agency performance and to enforce NESHAP regulations as appropriate. OSHA considers any amount of asbestos to be regulated.

State

Asbestos in Connecticut is regulated by the State of Connecticut Department of Public Health, under Standards for Asbestos Abatement – Section 19a-333a-1 through 16 of Regulations of Connecticut State Agencies (RCSA) and Licensing and Training Requirements for Persons Engaged in Asbestos Abatement and Asbestos Consulting Services – Section 20-440-1 through 9 and Section 20-441 of RCSA.

Asbestos Survey

During this survey, suspect ACM were separated into three US EPA categories. These categories are: thermal system insulation (TSI), surfacing materials, and miscellaneous materials. TSI includes all materials used to prevent heat gain or loss or water condensation on mechanical systems. Typical examples of TSI are boiler, duct and tank insulation, pipe and pipe fitting insulation. Surfacing materials are sprayed, troweled or otherwise applied to an existing surface and common uses are fireproofing, decorative and acoustical plaster applications. Miscellaneous materials include all ACM not listed as TSI or surfacing and include: flooring materials, ceiling tiles, adhesives, transite cement board, sink undercoating, gypsum board/taping and joint compounds, cove base materials, caulking and glazing compounds, damp-proofing/tars/mastics, roofing materials and other materials. State of Connecticut DPH licensed asbestos inspectors Matthew Myers (#000041), Willie Thompson (#000673) and Ryan Murphy (#000937) performed the survey.

ACM Results Summary

Bulk sampling results are included as Tables 1 and 2 below. Analytical asbestos laboratory data can be found in Appendix A.

As required by EPA and CT DPH, samples were analyzed by individual layers (e.g. floor tile & the associated mastic were analyzed as two separate samples, rough and finish coat plasters, etc.). Bulk samples of suspect ACM were analyzed using the PLM analytical methodology in accordance with EPA Protocol 600/R-93/116 and possibly by PLM Point Count. Additional analysis

of non-friable organically bound (NOB) materials (e.g. flooring mastics) using NOB and transmission electron microscopy (TEM) was performed. The samples were analyzed by EMSL of Cinnaminson, New Jersey, accredited by the National Voluntary Laboratory Program (NVLAP) and American Industrial Hygiene Association (AIHA).

Utilizing the EPA and CT DPH protocols and criteria, the following materials **were determined to be ACM or assumed to be ACM:**

Table 1 – Summary of Asbestos-Containing Materials

Material	Location	% Asbestos and Sample ID	Estimated Quantity of ACM
1902 Original Building and 1925 Addition			
Pipe and Pipe Fitting Insulation – Thermal System Insulation	Inaccessible – Assumed Behind Walls, Ceilings and Chases and Possibly in Tunnels/Crawl Spaces	Assumed ACM	No Visible Insulation Noted Assume up to 900 Linear Feet Inaccessible Behind Walls, Ceilings and Chases and up to 800 Linear Feet in Possible Inaccessible Tunnels/Crawl Spaces
Interior Window Glazing Compound (White) – Miscellaneous Material	Classrooms 3 and 4 Corridor	ACM 3% Anthophyllite 041381A	Six Window Openings
9"x9" Floor Tiles and Black Mastic – Miscellaneous Materials	Ground Floor Custodial Closet (with Ramp) Adjacent Room 10 and Custodial Office Under Work Shelves Throughout Underneath Millwork, Cabinetry, Other Non-Moveable Objects	ACM 1.5%-8% Chrysotile 0413113A 0413114A 0413115A 080916	180 Square Feet Unknown – Assumed Throughout Each Room

Material	Location	% Asbestos and Sample ID	Estimated Quantity of ACM
White and Pink Sink Undercoating – Miscellaneous Materials	Classrooms 20, 22, 23, 28, 31, 33, 35, 36, 38, 40, 43 and 44	ACM 3% Chrysotile 0413151A 0413152A	12 Sinks
Interior Sink Backsplash Caulking Compound (White) – Miscellaneous Material	Classrooms 20, 22, 23, 25, 28, 31, 33, 35, 36, 38, 40, 43 and 44	ACM 3% Anthophyllite 0413158A	130 Linear Feet
Wall and Ceiling Plaster Finish/Rough Coats – Surfacing Materials	Throughout 1902 Original Building	ACM 1.5%-2.25% Chrysotile 0413191B 0413195A 0413226A And Previous Historical Results	77,000 Square Feet (Quantity Assumes Plaster is Located Above Sheetrock Ceilings Above Suspended Ceiling Tiles and Walls Behind Sheetrock and Other Wall Materials) (Quantity Does Not Include Plaster Located in Attic)
Bulletin Board, "Chalk" Board and Other Wall Adhesives – Miscellaneous Materials (Adjacent Materials/Substrates are Contaminated – Multiple Layers of Boards/Materials Also)	Throughout Original Building and 1925 Addition	Assumed ACM	Unknown – Estimate up to 3,750 Square Feet
Exterior/Interior Window Caulking Compounds – Miscellaneous Material	Exterior	ACM 4% Chrysotile 0413263A	93 Window Openings (Varying Sizes/Windows Per Opening)

Material	Location	% Asbestos and Sample ID	Estimated Quantity of ACM
Exterior/Interior Door and Door/Window Caulking Compounds (Glazing Compound Also at Main Front Entry Door) – Miscellaneous Materials	Exterior	ACM 3%-5% Chrysotile 0413264A 0413265A 0413266A	Eight Door and Door/Window Openings (Varying Sizes Per Opening)
Exterior Wall Expansion Caulking Compound – Miscellaneous Material	Exterior	ACM 4% Chrysotile 0413258A	60 Linear Feet
Exterior Vent Caulking Compound – Miscellaneous Materials	Exterior	ACM 4% Chrysotile 0413260A 0413261A	Seven Vent Openings
1950 Addition			
Pipe and Pipe Fitting Insulation – Thermal System Insulation	Exterior Storage Room Adjacent Classroom 3 Inaccessible – Assumed Behind Walls, Ceilings and Chases	Assumed ACM	40 Linear Feet Visible Assume up to 1,600 Linear Feet Inaccessible Behind Walls, Ceilings and Chases
9"x9" Floor Tiles and Black Mastic – Miscellaneous Materials	Throughout Underneath Millwork, Cabinetry, Other Non-Moveable Objects	ACM 6% Chrysotile 080918	Unknown – Assumed Throughout Each Room
White Sink Undercoating – Miscellaneous Material	Classrooms 1, 2, 12, 41 and 42	ACM 3% Chrysotile 041360A	Five Sinks

Material	Location	% Asbestos and Sample ID	Estimated Quantity of ACM
White Duct Insulation (Residue) – Thermal System Insulation (Substrates Contaminated)	Mechanical Room Above Room 29 (Above Gymnasium) (May Exist In Other Locations and Underneath Fiberglass Duct Insulation Throughout Addition – Checked Accessible Ducts in Several Locations)	ACM 12% Chrysotile 041364A	Unknown – Estimate 4,000 Square Feet above Gymnasium (Temporary Flooring May Need to be Installed Throughout the Attic to Make Abatement Work Safe (May Require Engineer for Additional Weight of Temporary Flooring)
Gray Duct Insulation – Thermal System Insulation (Substrates Contaminated)	Exterior Storage Room Adjacent Classroom 3	ACM 21% Chrysotile 041365A	225 Square Feet
Bulletin Board, "Chalk" Board and Other Wall Adhesives – Miscellaneous Materials (Adjacent Materials/Substrates are Contaminated – Multiple Layers of Boards/Materials Also)	Throughout 1950 Addition	Assumed ACM	Unknown – Estimate up to 1,850 Square Feet
Interior Door Window Glazing Compound (Black) – Miscellaneous Material	Classrooms 41 and 42	ACM 3% Chrysotile 041371A	Two Doors
Interior Window Caulking Compound – Miscellaneous Material	Stairwell Adjacent Classroom 42/29 and Gymnasium	ACM 4%-5% Chrysotile 041374A 041376A	Eight Large Window Openings

Material	Location	% Asbestos and Sample ID	Estimated Quantity of ACM
Interior Door Caulking Compounds – Miscellaneous Materials	Gymnasium Foyer/Lobby, Gymnasium and Boiler Room Corridors and Stairwell Corridor Adjacent Classroom 12	ACM 3%-4% Chrysotile 041377A-C	200 Linear Feet
Interior Door/Window Caulking Compound – Miscellaneous Material	Gymnasium Foyer/Lobby Perimeter Entry/Exit	ACM 3% Chrysotile 041378A	Two Door/Window Openings
Ceramic Wall Tile Adhesive (Dark Brown) – Miscellaneous Material (May be a Replacement Adhesive)	Girls Locker Room Rear Shower Room (May Exist In Other Locations Throughout Addition)	ACM 7% Chrysotile 0413142A	Estimate up to 100 Square Feet
Black Tar/Paper On/Inside Concrete Walls – Miscellaneous Materials	Tunnels/Crawl Spaces	ACM 12%-13% Chrysotile 0413245A 0413246A	Unknown – Should Not Be Affected By Planned Renovations
Exterior/Interior Window Caulking Compounds – Miscellaneous Materials	Exterior	ACM 4%-5% Chrysotile 0413254A 0413255A	85 Window Openings (Varying Sizes/Windows Per Opening)
Exterior/Interior Door and Door/Window Caulking Compounds – Miscellaneous Material	Exterior	ACM 4%-8% Chrysotile 0413256A 0413257A	Ten Door and Door/Window Openings (Varying Sizes Per Opening)

Material	Location	% Asbestos and Sample ID	Estimated Quantity of ACM
Exterior Wall Expansion Caulking Compound – Miscellaneous Material	Exterior	ACM 4% Chrysotile 0413258A	20 Linear Feet
Exterior Vent Caulking Compound – Miscellaneous Materials	Exterior	ACM 4% Chrysotile 0413260A 0413261A	Four Vent Openings
1957 Addition			
Pipe and Pipe Fitting Insulation – Thermal System Insulation	Classroom 6 Inaccessible – Assumed Behind Walls, Ceilings and Chases	Assumed ACM	Ten Linear Feet Visible Assume up to 200 Linear Feet Inaccessible Behind Walls, Ceilings and Chases
9"x9" Floor Tiles and Black Mastic – Miscellaneous Materials	Throughout Underneath Millwork, Cabinetry, Other Non-Moveable Objects	ACM 8% Chrysotile 080920	Unknown – Assumed Throughout Each Room
Bulletin Board, "Chalk" Board and Other Wall Adhesives – Miscellaneous Materials (Adjacent Materials/Substrates are Contaminated – Multiple Layers of Boards/Materials Also)	Throughout 1957 Addition	Assumed ACM	Unknown – Estimate up to 800 Square Feet
Black Damp-proofing Material(s) – Miscellaneous Material (Substrates Contaminated)	Perimeter Walls Throughout Addition	ACM 3% Chrysotile 041348A	5,000 Square Feet

Material	Location	% Asbestos and Sample ID	Estimated Quantity of ACM
Exterior Foundation Damp-proofing Tar Material – Miscellaneous Material (Substrates Contaminated)	Exterior Foundations	ACM 4% Chrysotile 0413249A	Unknown – Estimate up to 1,250 Square Feet
Exterior Vent Caulking Compound – Miscellaneous Material	Exterior	ACM 6% Anthophyllite 2% Chrysotile 0413251A	One Vent Opening
Exterior/Interior Window Caulking Compound – Miscellaneous Material	Exterior	ACM 4% Chrysotile 0413253A	Eight Window Openings (Varying Sizes/Windows Per Opening)
1995 Addition			
Interior Window Sill Caulking Compound – Miscellaneous Material	Classrooms 114 and 115	ACM 3% Anthophyllite 041306A	40 Linear Feet
Roofing Materials			
Copper Flashing/Wall Tar – Miscellaneous Material	Roofs Throughout Except 1995 Addition	ACM 4% - 6% Chrysotile 0413277A 0413298A	Unknown – Should Not Be Affected By Planned Renovations
Chimney Flashing Tar – Miscellaneous Material	Roofs Throughout Except 1995 Addition	ACM 8% Chrysotile 0413292A	450 Square Feet

Material	Location	% Asbestos and Sample ID	Estimated Quantity of ACM
Gutter Seam Flashing Tar – Miscellaneous Material	1950 Addition (May Exist on Other Roofs As Well – Could Not Access All Roofing Areas)	ACM 5% Chrysotile 0413300A	Unknown – Estimate 1,100 Square Feet for 1950 Addition

Utilizing the EPA and CT DPH protocols and criteria, the following materials **were determined to be non-ACM:**

Table 2 – Summary of Non-Asbestos-Containing Materials

Material	Location	Sample ID
1902 Original Building and 1925 Addition		
"Newer" Interior Door Caulking Compound (White) – Miscellaneous Material	Classrooms 3 and 4 Corridor	041379A,B
Interior Window Caulking Compound (Black) – Miscellaneous Material	Classrooms 3 and 4 Corridor	041380A,B
12"x12" Blue and Light Blue Floor Tiles and Black Mastic – Miscellaneous Materials	Throughout	0413117A-C 0413118A,B 0413202A,B 0413203A-C
Wood Wall Panel Adhesive – Miscellaneous Material	Classrooms 3 and 4 Corridor	0413128A,B
Gray Sink Undercoating – Miscellaneous Materials	Throughout Original Building	0413153A-C
Fire Door Insulation – Miscellaneous Materials	Corridor Closet Adjacent Classroom 37	0413154A,B
Red Fire Stop Caulking – Miscellaneous Material	Throughout	0413155A,B
Fiberglass Batt Insulation Backing – Miscellaneous Material	Attic	0413156A,B

Material	Location	Sample ID
Interior Window Glazing Compound – Miscellaneous Material	Above Corridor Entry Doors Throughout	0413157A,B
Interior Window and Window Sill Caulking Compound – Miscellaneous Material	Throughout	0413159A,B
"Newer" Interior Window and Door Window Glazing Compounds (Black) – Miscellaneous Materials	Media Center	0413160A,B 0413161A,B
Interior Door Window Glazing Compound (Black) - Miscellaneous Material	Throughout Corridors	0413162A,B
Blackboards – Miscellaneous Material	Throughout	0413163A,B
Countertop Adhesive – Miscellaneous Material	Throughout	0413164A,B
Bulletin Boards and Adhesives (Tan, Brown and Dark Brown) and Wall Adhesives (Yellow and White) – Miscellaneous Materials	Throughout	0413165A,B – 0413171A,B 0413175A,B 0413177A,B 0413178A,B
Sink Wall Materials (Gray and Black Layers) and Adhesive – Miscellaneous Materials	Throughout Classrooms	0413172A,B – 0413174A,B
Wall Adhesive (Brown) Behind Wall Panel/Board – Miscellaneous Materials	Media Center	0413176A,B
Multiple Types and Sizes of Ceiling Tiles – Miscellaneous Materials	Throughout	041386A,B 0413179A,B - 0413182A,B
Gypsum Board and Taping/Joint Compound – Miscellaneous and Surfacing Materials	Throughout	0413183A-C 0413184A-C
Ceiling Plaster One Coat – Surfacing Material	Throughout Addition	041396A-C

Material	Location	Sample ID
Wall and Ceiling Plaster Finish and Rough Coats – Surfacing Materials	Throughout Addition	0413106A 0413107A 0413108A 0413109A 0413188A 0413189A 0413190A 0413191A 0413192B,C 0413193B,C 0413194B,C 0413195B,C And Previous Historical Results
18"x18" Flooring Material, Gray Material and Yellow Mastic – Miscellaneous Materials	Main Office Areas	0413196A,B – 0413198A,B
Older Floor Tiles, Black Mastic and Floor Leveler – Miscellaneous Materials	Stairwells	0413199A,B – 0413201A,B
Red Flooring Material And Papers Under Wood/Plywood – Miscellaneous Materials	Throughout Original Building	0413204A,B 0413205A,B
Rubber Flooring Adhesive (Yellow) and Black Mastic – Miscellaneous Materials	Stairwells	0413206A,B 0413207
Carpet Adhesive – Miscellaneous Material	Media Center	0413208A,B
Epoxy Flooring – Miscellaneous Material	Toilet Room Adjacent Classroom 7	0413209A,B
Terrazzo Flooring and Mud Bed – Miscellaneous Materials	Throughout Corridors	0413210A,B 0413211A,B

Material	Location	Sample ID
Cove Base and Adhesives (Multiple Colors) – Miscellaneous Materials	Throughout	0413123A,B 0413124A,B 0413212A,B – 0413217
Dark Leveler/Floor Material, Beige and Gray Concrete Like Floor Materials – Miscellaneous Materials	Media Center	0413218A,B – 0413220A,B
Dark and White Thick Floor Leveler/Filler Materials – Miscellaneous Materials	Classroom 23, Assumed Throughout	080914A,B 080915A,B
Terracotta Wall and Mortar – Miscellaneous Materials	Attic and Assumed Throughout Behind Walls	080906A,B 080907A-C
Glazed Block Wall Mud Bed and Mortar – Miscellaneous Materials	Throughout	080908A,B - 080911A,B
Brick and Grout/Mortar – Miscellaneous Materials	Attic	0413221A,B – 0413224A,B
Hard Gray Floor Material – Miscellaneous Material	Attic	0413227A,B 0413228A,B
Ceramic Floor and Wall Tile Mud Beds, Grouts and Adhesives – Miscellaneous Materials	Throughout	0413229A,B – 0413242
1950 Addition		
Light and Dark Gray Sink Undercoating – Miscellaneous Materials	Throughout Addition	041361A,B 041362A,B
Duct Pin Adhesive (Brown) – Miscellaneous Material	Mechanical Room Above Room 29	041363A,B
"Newer" Pipe End Cap Insulation – Thermal System Insulation	Mechanical Room Above Room 29, Throughout Addition	041366A-C
Mineral Wool Loose Insulation – Thermal System Insulation	Attic	041367A-C
Spray Applied Fireproofing – Surfacing Material	Boiler Room	041368A-E

Material	Location	Sample ID
Red Fire Stop Caulking – Miscellaneous Material	Throughout Addition	041369A,B
"Newer" HVAC Duct Seam Sealant Compound – Miscellaneous Material	Mechanical Room Above Room 29, Throughout Addition	041370A,B
Interior Door Window Glazing Compound (Black) – Miscellaneous Material	Media Center	041372A,B
Interior Glass Block Window Grout – Miscellaneous Material	Stairwell Adjacent Classroom 42	041373A,B
"Newer" Interior Window Caulking Compound (White) – Miscellaneous Material (Contaminated with Asbestos-Containing Caulking Compound)	Gymnasium	041375A,B
Blackboards – Miscellaneous Material	Throughout Addition	041382A,B
Slate Window Sills – Miscellaneous Material	Throughout Addition	041383A,B
Countertop Adhesive – Miscellaneous Material	Throughout Addition	041384A,B
Multiple Types and Sizes of Ceiling Tiles and Glue Daubs – Miscellaneous Materials	Throughout Addition and Gymnasium	041385A,B 041387A,B - 041393A,B 080905A,B
Gypsum Board and Taping/Joint Compound – Miscellaneous and Surfacing Materials	Throughout Addition	041394A-C 041395A-C
Ceiling Plaster One Coat – Surfacing Material	Throughout Addition	041396A-C
Wall Plaster One Coat – Surfacing Material	Throughout Addition	041397A-C
Wall and Ceiling Plaster Finish and Rough Coats – Surfacing Materials	Throughout Addition	041398A-C – 0413109A-C

Material	Location	Sample ID
Black Paper Under Wood Floor – Miscellaneous Material	Stage	0413110A,B
Black Tar and Tar Paper on Block Walls – Miscellaneous Material	Under Stage	0413111A,B 0413112A,B
12"x12" White, Green/Blue Floor Tiles and Black Mastic – Miscellaneous Materials	Throughout Addition	0413119A,B – 0413122A,B
Sink Wall Materials (Gray and Black Layers) and Adhesive – Miscellaneous Materials	Throughout Addition Classrooms	0413125A,B – 0413127A,B
Bulletin Boards and Adhesives (Light and Dark Brown) – Miscellaneous Materials	Throughout Addition	0413129A,B – 0413133A,B
Terrazzo Flooring and Mud Bed – Miscellaneous Materials	Throughout Addition Corridors	0413134A,B - 0413136A,B
Glazed Block Wall Mud Bed and Mortar – Miscellaneous Materials	Throughout	080912A,B 080913A,B
Concrete Deck – Miscellaneous Material	Classroom 1	0413137A,B
Block Wall and Mortar – Miscellaneous and Surfacing Material	Exterior Storage Room Adjacent Classroom 3	0413138A,B 0413139A-C
Epoxy Flooring and Cove Base and Mud Bed – Miscellaneous Materials	Classroom 1 and 2 Toilet Room and Locker Room Toilet	0413140A,B 0413141A,B
Ceramic Floor and Wall Tile Mud Beds and Grouts – Miscellaneous Materials	Throughout Addition	0413143A,B – 0413150A,B
Fire Door Insulation – Miscellaneous Materials	Room 13	080901
Black and Tan Paper Debris – Miscellaneous Materials	Tunnels	0413243A,B 0413244A,B
Exterior "Newer" Vent Caulking Compound – Miscellaneous Material (Contaminated With Asbestos-Containing Caulking Compound)	Exterior	0413259A,B

Material	Location	Sample ID
Exterior Wall Paint – Surfacing Material	Exterior	0413262A-C
1957 Addition		
White and Gray Sink Undercoating – Miscellaneous Materials	Throughout Addition	041339A,B 041340A,B
Interior Window Glazing Compounds – Miscellaneous Material	Throughout Addition Above Doors	041341A,B
2'x2' Ceiling Tile – Miscellaneous Material	Throughout Addition	041342A,B
Gypsum Board and Taping/Joint Compound – Miscellaneous and Surfacing Materials	Throughout Addition	041343A,B 041344A-C
Wall Plaster Finish and Rough Coats – Surfacing Materials	Throughout Addition	041345A-G 041346A-G
Black Paper on Concrete Deck – Miscellaneous Material	Classroom 24	041347A,B
12"x12" Blue and Light Blue Floor Tiles and Black Mastic – Miscellaneous Materials	Throughout Addition	041349A,B – 041351A,B
Countertop Adhesive – Miscellaneous Material	Throughout Addition	041352A,B
Cove Base and Adhesive – Miscellaneous Materials	Throughout Addition	041353A,B 041354A,B
Bulletin Boards and Adhesives (Light Brown, Brown and Gray) – Miscellaneous Materials	Throughout Addition	041355A,B – 041359A,B
Exterior Wall Paint – Surfacing Material	Exterior Ground Floor Addition	0413250A-C
Exterior Door Caulking Compound – Miscellaneous Materials	Exterior	0413252A,B
1995 Addition		
Black and Gray Sink Undercoating – Miscellaneous Materials	Throughout Addition	041301A,B 041302A,B

Material	Location	Sample ID
Kiln and Kiln Roping – Miscellaneous Materials	Classroom 115 Closet	041303A,B 041304A,B
Sink Caulking Compound – Miscellaneous Material	Throughout Addition	041305A,B
Interior Window Sill Caulking Compound – Miscellaneous Material	Cafeteria	080903 080904
Interior Door Window Glazing Compound (Black) – Miscellaneous Material	Cafeteria/Corridor	041307A,B
HVAC Duct Seam Sealant Compound – Miscellaneous Material	Throughout Addition	041308A,B
2'x4' Ceiling Tiles – Miscellaneous Materials	Throughout Addition	041309A,B 041310A,B
Gypsum Board and Taping/Joint Compound – Miscellaneous and Surfacing Materials	Throughout Addition	041311A,B 041312A-C
Sheet Flooring, Adhesive and Gray Cement/Substrate/Leveler – Miscellaneous Materials	Kitchen	041313A,B – 041315A,B 041323A,B
12"x12" Pink, White and Blue Floor Tiles , Yellow Mastic and Floor Leveler – Miscellaneous Materials	Throughout Addition	041316A,B – 041320A,B
Rubber Sheet Flooring and Yellow Adhesive – Miscellaneous Materials	Entry/Exit Foyers	041321A,B 041322A,B
Cove Base and Adhesives (Multiple Colors) – Miscellaneous Materials	Throughout Addition	041324A,B – 041329A,B
Plastic Wall Adhesive – Miscellaneous Material	Kitchen	041330A,B
Wall/Bulletin Boards and Adhesives – Miscellaneous Materials	Throughout Addition	041331A,B – 041334A,B
Ceramic Floor and Wall Tile Mud Beds and Grouts – Miscellaneous Materials	Cafeteria, Corridor and Toilet Rooms	041335A,B – 041338A,B

Material	Location	Sample ID
Exterior Window Sill Caulking Compound – Miscellaneous Material	Exterior Throughout	0413247A,B
Exterior Window, Door, Wall Expansion and Vent Caulking Compound – Miscellaneous Material	Exterior Throughout	0413248A,B
Roofing Materials		
Exterior "Newer" Copper Flashing, Perimeter, Wall Expansion and HVAC Caulking Compounds – Miscellaneous Materials	Roofs Throughout	0413267A,B – 0413270A,B
Top and Bottom Layers Roof Shingles and Black Paper Under Shingles – Miscellaneous Materials	1995 Addition	0413271A,B – 0413273A,B
Roof Walk Mats – Miscellaneous Material	1995 and 1950 Additions	0413318A,B
Perimeter, Penetration and HVAC Flashing Tar and Tar Paper – Miscellaneous Materials	Roofs Throughout	0413274A,B - 0413276A,B 0413287 0413289A,B - 0413291A,B 0413310A,B – 0413317A,B
Copper Flashing Tar Patch – Miscellaneous Material	1995 Addition to 1950 Addition	0413278A,B
Rolled Roofing, Paper Layer and Soft Concrete Deck – Miscellaneous Materials	1995 Addition and 1957 Addition Roofs	0413279A,B - 0413282A,B 0413283 – 0413285 0413288
Bottom Layer Roof Field Tar – Miscellaneous Material	1957 Addition	0413286A,B
Three Layers of Roofing Shingles, Black Paper Under Shingles and Concrete Roof Deck– Miscellaneous Materials	1950 Addition	0413293A-D – 0413297A-C

Material	Location	Sample ID
Gutter Flashing Tar – Miscellaneous Material (Contaminated with Asbestos-Containing Gutter Seam Flashing Tar)	1950 Addition	0413299A,B
Three Layers of Roofing Shingles and Black Paper Under Shingles – Miscellaneous Materials	1902 Building and 1925 Addition	0413301A,B – 0413304A,B
Rolled Roofing, Soft Concrete, Paper Layers, Bottom Layer Tar and Tar on Deck – Miscellaneous Materials	1950 Addition	0413305A,B – 0413309A,B
Roof Field/Flashing Tar – Miscellaneous Material	1950 Addition Over Bay Windows	0413319A,B

NOTE: Materials that contain less than 1% asbestos are regulated by OSHA and some landfills may not accept the waste as clean construction debris. See appendix A for materials that contain less than 1% asbestos.

DISCLAIMERS: Reasonable care was taken to identify all suspect accessible asbestos containing materials through visual inspection and limited destructive sampling techniques. However, it is not feasible to uncover all materials that may exist. Additional materials may need to sampled after the building has been vacated and/or during the selective demolition/renovation process. Some locations/materials were not sampled during this survey due to occupancy, location and damage required to inspect certain materials/areas.

Flooring Materials Remaining (Hidden) – A majority of the flooring materials (tiles) were reported to have been abated throughout the building. Langan checked at least one location in each room and in common areas. Additional asbestos-containing flooring materials may exist and may be discovered during selective demolition and/or building renovation under gypsum board walls, under fixed cabinetry/millwork/non-moveable objects throughout all areas (confirmed to exist), under lockers, under multiple layers of flooring (wood, newer tiles/flooring materials, epoxy, rubber, etc.), under floor leveling compounds and/or soft concrete and underneath other materials. The gymnasium flooring materials were not investigated (currently not part of planned renovations). Suspect asbestos-containing materials could exist underneath the gymnasium flooring (tars, damp-proofing, paper, other materials).

Duct Insulation Residue – The mechanical space above room 29 (above gymnasium) was found to have HVAC duct work and the ducts had a white residue on them that was found to contain asbestos. This material may exist throughout the building in other locations (checked several locations) and may also exist underneath fiberglass duct insulation throughout.

Possible Additional Tunnel/Crawl Space and Inaccessible Areas – Accessible tunnel/crawl space areas were investigated. **Piping was found to be going into solid concrete walls and there may exist tunnel/crawl space areas under the 1902 original building and 1925 additions that are currently not accessible.** Additional asbestos-containing materials (pipe and pipe fitting insulation, etc.) could exist in these locations. The majority of the "higher" original building and 1925 additions roofing materials could not be accessed safely for visual inspection and bulk sampling (inspection and bulk sampling did occur on these roofs adjacent the roof hatch by the 1957 addition). There is a closet hatch door (corridor closet adjacent classroom 42) that could not be accessed due to the amount of stored materials inside the closet. Additional asbestos-containing materials may exist in this area which is currently assumed to be the boiler room exhaust chimney that runs from the ground floor to the second floor. Several areas in the previous locker rooms could also not be accessed due to materials stored in these areas and additional asbestos-containing materials may exist in these areas (pipe and pipe fitting insulation will be assumed inside walls/chases).

Previous Abatement Records – Existing recordkeeping documents stated that asbestos-containing roofing materials were abated. Previous abatement recordkeeping also state that the entire boiler room and tunnels/crawl spaces/mechanical spaces have been abated of several asbestos-containing materials as well as asbestos-containing residue found underneath fiberglass pipe insulation. Langan investigated representative areas and noted the boiler, boiler exhausts, pipe insulation, etc. were "newer" and did not find suspect asbestos-containing insulation materials or other materials abated to be present. Asbestos-containing materials may still exist in some locations, underneath fiberglass pipe insulation throughout as well as throughout the roofs. A window replacement project was reported to have occurred in 2012. The window caulking compounds were found to contain asbestos throughout the majority of the original building and 1925, 1950 and 1957 additions.

Interior Hidden Materials - Interior walls/ceilings/floors/other building materials were opened up/accessed in limited locations to investigate for suspect asbestos-containing materials. Additional suspect asbestos-containing materials may be discovered during selective demolition and/or renovation activities despite the inspectors investigating representative areas during the

survey. Additional asbestos containing materials may be found:

- Interiors of boilers, walk-in freezers, etc. (appear to be "newer" and should not have asbestos containing materials inside them but will need to be sampled prior to demolition);
- Behind water fountains (tar/damp-proofing and pipe insulation);
- Inside HVAC ducts, mechanical systems, chimneys and incinerators (damp-proofing, tars, adhesives, sealants, fire brick and thermal system insulation);
- Adhesives (and other materials) associated with millwork, cabinetry, shelving, window sills, behind gypsum board walls/ceilings, classroom sink walls areas, mirrors and wall materials (checked several locations and sampled limited materials – most bulletin boards and "chalk" boards were not able to be investigated behind), etc.;
- Behind custodian slop sinks (damp-proofing/tar behind);
- Behind ceilings, walls, chases and flooring throughout (duct insulation, pipe insulation, vibration isolation cloth, roofing debris, flooring, etc.) and underneath the stage (checked limited areas). There are multiple layers of wall, ceiling and flooring materials throughout original building and additions with inaccessible areas behind them;
- Vermiculite behind/inside walls, ceilings and chases (checked several areas in attic);
- Roofing materials and/or debris not found during this inspection (checked several locations throughout);
- Paints, cement, brick and masonry (typically not suspect);
- Transite cement board, adhesives, pipe insulation, other materials behind radiators, closets, wall paneling/materials, exterior, ceilings, soffits, etc.);
- HVAC duct adhesives, duct pin adhesive, seam and flange sealants and vibration isolation cloths (checked several locations) throughout;
- Additional fire door/door insulation;
- Behind ceramic walls and floors (damp-proofing/tars/etc.). Checked several locations throughout building. The girls locker room ceramic walls were found to have asbestos-containing adhesive behind the tiles in one location and this material may exist in additional areas in this room as well as other areas (checked several additional areas, including inside the girls locker room and did not find except for one location);
- Asbestos-containing pipe and/or pipe fitting residue/contamination underneath fiberglass insulation (checked several locations);
- Paper backing inside lights and electrical insulation (stage and other locations – stage lighting appeared to be "newer");
- Damp-proofing/tar/paper behind perimeter walls throughout and around perimeter wall window, door, vent openings throughout and

- Materials (adhesives, transite, etc.) behind exterior "stucco" textured walls.

Foundations/Soil and Buried Piping and Mechanical Conduits – Foundation damp-proofing/tars/mastics may exist under the soil on the building foundations (checked 1957 addition). Additional damp-proofing materials that have not been investigated/sampled, may exist in other locations, on the inside of foundation walls and underneath floor slabs throughout. It is not known if other materials are buried in the soil adjacent to the building (ex. transite and/or orangeburg piping, etc.). Asbestos containing damp-proofing/tars/mastics/other materials may also exist on piping and mechanical conduits in the subsurface.

Exterior Hidden Materials – Additional asbestos-containing materials (damp-proofing, etc.) may exist behind wall materials not investigated/in other locations that have not been opened up/sampled to date. Langan could not drill above door or window headers/lintels due to the damage that would occur. "Older" window/door/vent/wall sealant compounds may exist behind newer sealant compounds (checked several locations) and behind blocked/filled in window/other openings. Additional hidden suspect asbestos containing "older" roofing materials may exist that were not found by the limited roof cuts/sampling that has occurred to date.

Hidden Materials Between Original Building and All Building Additions – Additional asbestos-containing materials (damp-proofing, etc.) may exist behind walls, etc. between different ages of the building/additions.

3.0 LEAD-BASED PAINT XRF SCREENING

A limited lead-based paint XRF (X-ray Fluorescence) screening survey was performed throughout the building by Pavel Zayenchik, a CT DPH licensed lead inspector (CT license #002262). LBP was identified exceeding the HUD/EPA action level of equal to or greater than 1.0 mg/cm^2 in the materials listed below. Toxicity Characteristic Leaching Procedure (TCLP) lead waste characterization samples should be taken to classify the building materials for proper waste disposal after the building has been vacated or during the start of renovation activities. See Appendix B for XRF field data sheets.

Table 3 – XRF Lead-Based Paint Screening Results (>1 mg/cm^2)

Sample Number	Component	Substrate	Color	Test Location	Total Lead mg/cm^2	Results
20	Post Handrail	Metal	Blue	1950 Stairwell	1.6	Positive
21	Handrail	Metal	Blue	1950 Stairwell	3.2	Positive
29	Door Casing	Wood	Brown	Room 35	5.2	Positive
30	Door Casing	Wood	Brown	Room 38	11.3	Positive
34	Door Casing	Metal	Brown	1902 Stairwell	11.9	Positive
35	Door Casing	Metal	Blue	1902 Stairwell	2.3	Positive
36	Stair Post	Metal	Blue	1902 Stairwell	1.7	Positive
38	Stringer	Metal	Blue	1902 Stairwell	1.4	Positive
43	Window Casing	Wood	Off White	Room 33	13.1	Positive
44	Window Sill	Wood	Off White	Room 33	18	Positive
58	Ceiling	Plaster	Brown	Room 41	21	Positive
59	Ceiling	Plaster	Brown	Room 38	17	Positive
66	Window Casing	Wood	White	Media Center	12.7	Positive
80	Door Casing	Metal	Brown	1902 Corridor	12	Positive
84	Door Casing	Metal	Blue	1902 Stairwell	1.4	Positive
91	Window Casing	Wood	Yellow	Girls Toilet	22.8	Positive
98	Window Casing	Wood	White	Room 28	14.5	Positive
99	Window Sill	Wood	White	Room 28	13.3	Positive
101	Door Casing	Wood	White	Main Entry	20.3	Positive
111	Ceiling	Plaster	Brown	Room 25	18.5	Positive
175	Door Casing	Wood	White	Exterior Exit @ Boiler	3.3	Positive
183	Window Casing	Metal	White	Exterior Room 5	1.1	Positive

Sample Number	Component	Substrate	Color	Test Location	Total Lead mg/cm^2	Results
184	Window Casing	Metal	White	Exterior 1902 Stairwell	1.1	Positive
188	Door Casing	Wood	White	Exterior 1902 Under Stairs	3.2	Positive
194	Door Casing	Wood	White	Exterior Corridor to Room 2	2.9	Positive
207	Vent	Metal	Gray	Exterior Room 6	2.8	Positive
210	Door Casing	Metal	Black	Exterior Room 12	1.6	Positive
211	Door Casing	Wood	White	Exterior Room 8	2.8	Positive
222	Door Casing	Wood	White	Exterior Gym	7.3	Positive

Contractors should be aware that OSHA has not established a level of lead in a material below which 29 CFR 1926.62 does not apply. Contractor shall comply with exposure assessment criteria, interim worker protection and other requirements of the regulation as necessary to protect workers and occupants/residents.

The information in this report does not constitute a comprehensive lead inspection under the Connecticut Department of Public Health Regulations, Section 19a-111-1 to 11. The survey was an XRF lead screening utilizing an XRF and does not satisfy the testing requirements of US EPA's Renovation, Repair and Painting Rule (RRP) under 40 CFR 745.80 through 92. Reliance on this report for determining RRP or CT DPH applicability is not authorized by Langan.

4.0 PCB SEALANT SOURCE MATERIALS

In recent years, the Unites States Environmental Protection Agency (US EPA) has learned that building sealants (e.g. caulking, glazing, expansion joint and other sealant materials) containing potentially harmful PCBs were used in many buildings in the 1950s through the 1980s. PCBs were added to building sealants for durability, resistance to degradation, and as a softener/plasticizer for application.

Connecticut Department of Energy and Environmental Protection (CTDEEP) has a PCB regulatory limit of 1 ppm and EPA has a regulatory limit of 50 ppm for source materials. The following "older" PCB sealant source materials are assumed to have greater than 50 ppm PCB (PCB Bulk Product Waste):

Table 4 – Summary of Assumed PCB Source Sealant Materials	
Material	**Location**
1902 Original Building and 1925 Addition	
Interior Window Caulking, Glazing and Door Caulking Compounds	Classrooms 3 and 4 Corridor (Six Window and Two Door Openings)
Interior Sink Backsplash Caulking Compound	Classrooms 20, 22, 23, 25, 28, 31, 33, 35, 36, 38, 40, 43 and 44 (130 Linear Feet)
Interior Door Window Glazing Compound	Classroom 8 and 7/8 (Two Doors)
Interior Window Glazing Compound (Above Corridor Entry Doors)	Classrooms 20, 22, 23, 25, 28, 31, 32, 33, 38, 39, 40, 43 and 44 (13 Windows)
Exterior/Interior Window Caulking Compounds (Perimeter Walls)	Exterior (93 Window Openings - Varying Sizes/Windows Per Opening)
Exterior/Interior Door and Door/Window Caulking Compounds (Glazing Compound Also at Main Front Entry Door) (Perimeter Walls)	Exterior (Eight Door and Door/Window Openings - Varying Sizes Per Opening)
Exterior Wall Expansion Caulking Compound (Perimeter Walls)	Exterior (60 Linear Feet)
Exterior Vent Caulking Compound (Perimeter Walls)	Exterior (Seven Vent Openings)
1950 Addition	
Interior Door Window Glazing Compound	Classrooms 41 and 42 (Two Doors)
Interior Window Caulking Compound	Stairwell Adjacent Classroom 42/29 and Gymnasium (Eight Large Window Openings)

Material	Location
Interior Door Caulking Compounds	Gymnasium Foyer/Lobby, Gymnasium and Boiler Room Corridors and Stairwell Corridor Adjacent Classroom 12 (200 Linear Feet)
Interior Door/Window Caulking Compound	Gymnasium Foyer/Lobby Perimeter Entry/Exit (Two Door/Window Openings)
Exterior/Interior Window Caulking Compounds (Perimeter Walls)	Exterior (85 Window Openings - Varying Sizes/Windows Per Opening)
Exterior/Interior Door and Door/Window Caulking Compounds (Perimeter Walls)	Exterior (Ten Door and Door/Window Openings- Varying Sizes Per Opening)
Exterior Wall Expansion Caulking Compound (Perimeter Walls)	Exterior (20 Linear Feet)
Exterior Vent Caulking Compound (Perimeter Walls)	Exterior (Four Vent Openings)
1957 Addition	
Interior Window Glazing Compounds (Above Corridor Entry Doors)	Classroom 24 and 37 (Two Window Openings)
Exterior/Interior Window Caulking Compounds (Perimeter Walls)	Exterior (Eight Window Openings - Varying Sizes/Windows Per Opening)
Exterior/Interior Door Caulking Compounds (Perimeter Walls)	Exterior (One Door Opening)
Exterior Vent Caulking Compounds (Perimeter Walls)	Exterior (One Vent Opening)

Sealant compounds throughout the 1995 addition and throughout the roofs were not included in the PCB visual survey due to the age of construction/installation (not typically suspect).

PCBs can also be found in paints, damp-proofing materials, roofing materials, adhesives, glues, floor mastics, etc. Sampling of these materials and sealant compounds was not authorized at the time of the HBM survey.

5.0 UNIVERSAL WASTE ASSESSMENT

Completion of detailed Universal Waste Assessment (identifying the number and location of Universal Waste items) was not conducted as part of this survey. Universal wastes noted during the visual survey include suspect PCB/DEHP (di (2-ethylhexyl) phthalate) ballasts/capacitors associated with light fixtures, air conditioner and refrigerant coolants, rooftop HVAC units, window air conditioning units, mercury-containing florescent and other mixed used high intensity light bulbs, smoke detectors and other alarms/sensors containing suspect radioactive materials, batteries and emergency lighting, exit and other signage, possible mercury-containing thermostats, switches, gauges, electronics, paints, wiring, fire extinguishers, cleaning and other chemicals.

All universal waste that is present in the building that will be impacted by renovation activities, will need to be properly removed, recycled, and/or disposed of at a landfill permitted to accept such waste. The removal, handling, recycling, and disposal must be performed in accordance with applicable Federal, State, and local regulations.

6.0 CONCLUSIONS AND RECOMMENDATIONS

Langan provides the following conclusions and recommendations, based on the findings of this revised limited NESHAP Pre-Renovation Hazardous Building Materials Survey:

Both friable and non-friable ACM were identified/assumed throughout the original building and building additions. Prior to selective demolition/renovation activities, the identified ACM that will be disturbed/impacted by renovation activities must be properly removed and disposed in accordance with applicable Federal, State and Local regulations by a State of Connecticut DPH licensed asbestos abatement contractor. A State of Connecticut licensed Asbestos Designer should create abatement specifications and an Asbestos Project Monitor should perform project oversight and air testing in accordance with the Federal and State regulations. These are all requirements of the CT DPH Standards. Additional sampling/destructive sampling/visual investigation is required for materials that have not been sampled to date and the abatement

contractor will be required to perform selective demolition throughout the interior and exterior of the building.

Building materials identified to contain less than 1% asbestos are regulated by OSHA and some landfills may not accept this waste as clean construction debris. Contractors must comply with all applicable federal and state regulations, including OSHA, when handling/disturbing/disposing of materials that contain less than 1% asbestos.

Contractors completing demolition and/or abatement activities should be aware that OSHA has not established a level of lead in a material below which 29 CFR 1926.62 does not apply. All contractors working on the project are responsible for having adequate training (RRP or greater amount) and performing their own OSHA compliance requirements. Contractor shall comply with exposure assessment criteria, interim worker protection and other requirements of the regulation as necessary to protect workers and occupants/residents. All contractors must comply with all applicable State and Federal regulations, including but not limited to the lead OSHA regulations.

TCLP lead waste characterization sampling should be performed to determine the waste disposal method for painted components to be removed/disposed (normal construction debris versus regulated hazardous waste). Separate TCLP samples should be obtained for each different age of construction (original building and building additions) after the building has been vacated or during the start of renovation activities. Metal materials painted in lead-based paint may be recycled. Langan recommends completion of a lead-based paint awareness specification for the project.

The interior plaster materials and window/door/other interior/exterior components found to contain lead based paint that will be scheduled to be impacted by selective demolition activities in the original building, 1925 and 1950's additions should be demolished under controlled conditions (polyethylene sheeting, negative air machines, etc.) to avoid possibly contaminating building areas and exterior ground surfaces with lead debris and dust and the CT DPH lead regulations may apply if children under the age of six occupy the building.

"Older" caulking, glazing and sealant compounds to be disturbed by selective demolition/ renovation activities are assumed to contain greater than 50 ppm PCB bulk product waste. These materials and other suspect PCB containing materials could be tested at a later date or assumed to contain PCBs (and possibly adjacent building materials and ground surfaces). PCB abatement specification(s) will be required and if sampling is performed, a PCB performance based plan

(does not require EPA approval) or self-implementing plan (requires EPA approval – two to six months is typical for this process) may be required depending upon the sample results. The owner/owners representative and Langan should meet to discuss the testing parameters (what materials is Langan authorized to sample (if any) and when will sampling occur) or what assumptions will be in place to write specifications without sampling (types of source materials to be assumed, extent of adjacent building materials, etc.).

All universal waste that is present in the building that will require removal/replacement due to planned renovation activities, will need to be properly removed, recycled, and/or disposed of at a landfill permitted to accept such waste. The removal, handling, recycling and disposal must be performed in accordance with applicable Federal, State, and local regulations. Langan recommends completion of a universal waste recycling/disposal specification for the project.

7.0 LIMITATIONS

The conclusions and recommendations presented in this report are professional opinions based solely upon Langan's visual observations, laboratory test data, and current regulatory requirements. These conclusions and recommendations are intended exclusively for the purpose stated herein, at the site indicated, and for the project indicated.

It is important to recognize that even the most comprehensive scope of services may fail to detect all hazardous building materials that may be associated with the property. Therefore, Langan cannot act as insurers and cannot "certify" that all hazardous building materials associated with the property have been identified, and no expressed or implied representation or warranty is included or intended in our report, except that our services were performed, within the limits prescribed by our client, with the customary thoroughness and competence of our profession.

Any suspect material that is not listed in this report must be assumed as ACM, PCBs, LBP, etc. until confirmed otherwise via laboratory testing.

Appendix A

Asbestos Analytical Laboratory Results and Chain-of-Custody

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID:	042309385
Customer ID:	LANG78
Customer PO:	
Project ID:	

Attn:	Matthew Myers Langan Engineering Long Wharf Maritime Center 555 Long Wharf Drive New Haven, CT 06511	Phone: Fax: Collected: Received: Analyzed:	(203) 562-5771 (203) 789-6142 4/19/2023 5/10/2023
Proj:	140265802 / Old Greenwich School		

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041301A ***Lab Sample ID:*** **042309385-0001**

Sample Description: 1990's Addition - Classroom 115/Black Sink Undercoating

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 041301B ***Lab Sample ID:*** **042309385-0002**

Sample Description: 1990's Addition - Classroom 115/Black Sink Undercoating

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 041302A ***Lab Sample ID:*** **042309385-0003**

Sample Description: 1990's Addition - Classroom 115/Gray Sink Undercoating

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	20.0%	80.0%	None Detected	

Client Sample ID: 041302B ***Lab Sample ID:*** **042309385-0004**

Sample Description: 1990's Addition - Classroom 115/Gray Sink Undercoating

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	22.0%	78.0%	None Detected	

Client Sample ID: 041303A ***Lab Sample ID:*** **042309385-0005**

Sample Description: 1990's Addition - Classroom 115 - Closet/Kiln

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 041303B ***Lab Sample ID:*** **042309385-0006**

Sample Description: 1990's Addition - Classroom 115 - Closet/Kiln

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 041304A ***Lab Sample ID:*** **042309385-0007**

Sample Description: 1990's Addition - Classroom 115 - Closet/Kiln Roping

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	95.0%	5.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041304B ***Lab Sample ID:*** **042309385-0008**
Sample Description: 1990's Addition - Classroom 115 - Closet/Kiln Roping

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	94.0%	6.0%	None Detected	

Client Sample ID: 041305A ***Lab Sample ID:*** **042309385-0009**
Sample Description: 1990's Addition - Classroom 115/Sink Caulking

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041305B ***Lab Sample ID:*** **042309385-0010**
Sample Description: 1990's Addition - Classroom 115/Sink Caulking

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041306A ***Lab Sample ID:*** **042309385-0011**
Sample Description: 1990's Addition - Classroom 115/Window Sill Caulking

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	97.0%	**3% Anthophyllite**	

Client Sample ID: 041306B ***Lab Sample ID:*** **042309385-0012**
Sample Description: 1990's Addition - Classroom 115/Window Sill Caulking

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 041307A ***Lab Sample ID:*** **042309385-0013**
Sample Description: 1990's Addition - Café/Corridor/Interior Door Window Glazing - Black

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 041307B ***Lab Sample ID:*** **042309385-0014**
Sample Description: 1990's Addition - Kitchen - Exit Door/Interior Door Window Glazing - Black

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 041308A ***Lab Sample ID:*** **042309385-0015**
Sample Description: 1990's Addition - Kitchen/HVAC Duct Seam Sealant

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041308B ***Lab Sample ID:*** **042309385-0016**

Sample Description: 1990's Addition - Kitchen/HVAC Duct Seam Sealant

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041309A ***Lab Sample ID:*** **042309385-0017**

Sample Description: 1990's Addition - Kitchen/2'x4' Ceiling Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	85.0%	15.0%	None Detected	

Client Sample ID: 041309B ***Lab Sample ID:*** **042309385-0018**

Sample Description: 1990's Addition - Kitchen/2'x4' Ceiling Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	82.0%	18.0%	None Detected	

Client Sample ID: 041310A ***Lab Sample ID:*** **042309385-0019**

Sample Description: 1990's Addition - Classrooms/Corridor/Café/2'x4' Ceiling Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	79.0%	21.0%	None Detected	

Client Sample ID: 041310B ***Lab Sample ID:*** **042309385-0020**

Sample Description: 1990's Addition - Classrooms/Corridor/Café/2'x4' Ceiling Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	75.0%	25.0%	None Detected	

Client Sample ID: 041311A ***Lab Sample ID:*** **042309385-0021**

Sample Description: 1990's Addition - Classroom 115/Gypsum Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/White	10.0%	90.0%	None Detected	

Client Sample ID: 041311B ***Lab Sample ID:*** **042309385-0022**

Sample Description: 1990's Addition - Classroom 114/Gypsum Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/White	11.0%	89.0%	None Detected	

Client Sample ID: 041312A ***Lab Sample ID:*** **042309385-0023**

Sample Description: 1990's Addition - Classroom 115/Gypsum Board Joint/Tape Compound

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041312B ***Lab Sample ID:*** **042309385-0024**

Sample Description: 1990's Addition - Classroom 114/Gypsum Board Joint/Tape Compound

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041312C ***Lab Sample ID:*** **042309385-0025**

Sample Description: 1990's Addition - Kitchen/Gypsum Board Joint/Tape Compound

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041313A ***Lab Sample ID:*** **042309385-0026**

Sample Description: 1990's Addition - Kitchen/Sheet Flooring

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Blue	0.0%	100.0%	None Detected	

Client Sample ID: 041313B ***Lab Sample ID:*** **042309385-0027**

Sample Description: 1990's Addition - Kitchen/Sheet Flooring

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Blue	0.0%	100.0%	None Detected	

Client Sample ID: 041314A ***Lab Sample ID:*** **042309385-0028**

Sample Description: 1990's Addition - Kitchen/Sheet Flooring Adhesive - Tan/Brown

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041314B ***Lab Sample ID:*** **042309385-0029**

Sample Description: 1990's Addition - Kitchen/Sheet Flooring Adhesive - Tan/Brown

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041315A ***Lab Sample ID:*** **042309385-0030**

Sample Description: 1990's Addition - Kitchen/Sheet Flooring - Gray Cement Substrate

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041315B ***Lab Sample ID:*** **042309385-0031**

Sample Description: 1990's Addition - Kitchen/Sheet Flooring - Gray Cement Substrate

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041316A ***Lab Sample ID:*** **042309385-0032**
Sample Description: 1990's Addition - Café/12"x12" Pink Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041316B ***Lab Sample ID:*** **042309385-0033**
Sample Description: 1990's Addition - Café/12"x12" Pink Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041317A ***Lab Sample ID:*** **042309385-0034**
Sample Description: 1990's Addition - Café/12"x12" White Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041317B ***Lab Sample ID:*** **042309385-0035**
Sample Description: 1990's Addition - Classroom 115 - Closet/12"x12" White Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041318A ***Lab Sample ID:*** **042309385-0036**
Sample Description: 1990's Addition - Classroom 115 - Closet/12"x12" Blue Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Blue	0.0%	100.0%	None Detected	

Client Sample ID: 041318B ***Lab Sample ID:*** **042309385-0037**
Sample Description: 1990's Addition - Classroom 114/12"x12" Blue Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Blue	0.0%	100.0%	None Detected	

Client Sample ID: 041318C ***Lab Sample ID:*** **042309385-0038**
Sample Description: 1990's Addition - Café/12"x12" Blue Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Blue	0.0%	100.0%	None Detected	

Client Sample ID: 041319A ***Lab Sample ID:*** **042309385-0039**
Sample Description: 1990's Addition - Kitchen - Storage/Yellow Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Yellow	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041319B ***Lab Sample ID:*** **042309385-0040**

Sample Description: 1990's Addition - Classroom 114/Yellow Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Yellow	0.0%	100.0%	None Detected	

Client Sample ID: 041319C ***Lab Sample ID:*** **042309385-0041**

Sample Description: 1990's Addition - Kitchen - Storage/Yellow Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Yellow	0.0%	100.0%	None Detected	

Client Sample ID: 041320A ***Lab Sample ID:*** **042309385-0042**

Sample Description: 1990's Addition - Classroom 115/Floor Tile Leveler

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	20.0%	80.0%	None Detected	

Client Sample ID: 041320B ***Lab Sample ID:*** **042309385-0043**

Sample Description: 1990's Addition - Classroom 114/Floor Tile Leveler

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	22.0%	78.0%	None Detected	

Client Sample ID: 041321A ***Lab Sample ID:*** **042309385-0044**

Sample Description: 1990's Addition - Exit Door Entry/Rubber Sheet Flooring

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041321B ***Lab Sample ID:*** **042309385-0045**

Sample Description: 1990's Addition - Exit Door Entry/Rubber Sheet Flooring

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041322A ***Lab Sample ID:*** **042309385-0046**

Sample Description: 1990's Addition - Exit Door Entry/Rubber Sheet Flooring - Yellow Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Yellow	0.0%	100.0%	None Detected	

Client Sample ID: 041322B ***Lab Sample ID:*** **042309385-0047**

Sample Description: 1990's Addition - Exit Door Entry/Rubber Sheet Flooring - Yellow Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Yellow	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041323A ***Lab Sample ID:*** **042309385-0048**
Sample Description: 1990's Addition - Kitchen/Gray Floor Leveler

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041323B ***Lab Sample ID:*** **042309385-0049**
Sample Description: 1990's Addition - Kitchen/Gray Floor Leveler

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041324A ***Lab Sample ID:*** **042309385-0050**
Sample Description: 1990's Addition - Cafeteria/Dark Cove Base

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 041324B ***Lab Sample ID:*** **042309385-0051**
Sample Description: 1990's Addition - Classroom 115/Dark Cove Base

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 041325A ***Lab Sample ID:*** **042309385-0052**
Sample Description: 1990's Addition - Cafeteria/Dark Cove Base - White Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041325B ***Lab Sample ID:*** **042309385-0053**
Sample Description: 1990's Addition - Classroom 115/Dark Cove Base - White Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041326A ***Lab Sample ID:*** **042309385-0054**
Sample Description: 1990's Addition - Classroom 115 - Closet/Pink Cove Base

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Pink	0.0%	100.0%	None Detected	

Client Sample ID: 041326B ***Lab Sample ID:*** **042309385-0055**
Sample Description: 1990's Addition - Classroom 115 - Closet/Pink Cove Base

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Pink	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041327A ***Lab Sample ID:*** **042309385-0056**

Sample Description: 1990's Addition - Classroom 115 - Closet/Pink Cove Base - Yellow Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041327B ***Lab Sample ID:*** **042309385-0057**

Sample Description: 1990's Addition - Classroom 115 - Closet/Pink Cove Base - Yellow Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041328A ***Lab Sample ID:*** **042309385-0058**

Sample Description: 1990's Addition - Kitchen - Storage/White Cove Base

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041328B ***Lab Sample ID:*** **042309385-0059**

Sample Description: 1990's Addition - Kitchen - Storage/White Cove Base

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041329A ***Lab Sample ID:*** **042309385-0060**

Sample Description: 1990's Addition - Kitchen - Storage/White Cove Base - Tan Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 041329B ***Lab Sample ID:*** **042309385-0061**

Sample Description: 1990's Addition - Kitchen - Storage/White Cove Base - Tan Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 041330A ***Lab Sample ID:*** **042309385-0062**

Sample Description: 1990's Addition - Kitchen/Plastic Wall Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 041330B ***Lab Sample ID:*** **042309385-0063**

Sample Description: 1990's Addition - Kitchen/Plastic Wall Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Tan	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.
200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041331A ***Lab Sample ID:*** **042309385-0064**
Sample Description: 1990's Addition - Cafeteria and Corridor/Wall/Bulletin Board - Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 041331B ***Lab Sample ID:*** **042309385-0065**
Sample Description: 1990's Addition - Cafeteria and Corridor/Wall/Bulletin Board - Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 041332A ***Lab Sample ID:*** **042309385-0066**
Sample Description: 1990's Addition - Corridor/Wall/Bulletin Board - Fabric

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	70.0%	30.0%	None Detected	

Client Sample ID: 041332B ***Lab Sample ID:*** **042309385-0067**
Sample Description: 1990's Addition - Classroom 114/Wall/Bulletin Board - Fabric

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	73.0%	27.0%	None Detected	

Client Sample ID: 041333A ***Lab Sample ID:*** **042309385-0068**
Sample Description: 1990's Addition - Corridor/Wall/Bulletin Board - Gray Material

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	80.0%	20.0%	None Detected	

Client Sample ID: 041333B ***Lab Sample ID:*** **042309385-0069**
Sample Description: 1990's Addition - Classroom 114/Wall/Bulletin Board - Gray Material

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	78.0%	22.0%	None Detected	

Client Sample ID: 041334A ***Lab Sample ID:*** **042309385-0070**
Sample Description: 1990's Addition - Corridor/Wall/Bulletin Board - Brown Material

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	88.0%	12.0%	None Detected	

Client Sample ID: 041334B ***Lab Sample ID:*** **042309385-0071**
Sample Description: 1990's Addition - Corridor/Wall/Bulletin Board - Brown Material

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	92.0%	8.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041335A ***Lab Sample ID:*** **042309385-0072**
Sample Description: 1990's Addition - Caferteria/Corridor/Ceramic Wall Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041335B ***Lab Sample ID:*** **042309385-0073**
Sample Description: 1990's Addition - Caferteria/Corridor/Ceramic Wall Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041336A ***Lab Sample ID:*** **042309385-0074**
Sample Description: 1990's Addition - Toilet Rooms/Ceramic Floor Tile - Mud Bed

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041336B ***Lab Sample ID:*** **042309385-0075**
Sample Description: 1990's Addition - Toilet Rooms/Ceramic Floor Tile - Mud Bed

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041337A ***Lab Sample ID:*** **042309385-0076**
Sample Description: 1990's Addition - Toilet Rooms/Ceramic Floor Tile - Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041337B ***Lab Sample ID:*** **042309385-0077**
Sample Description: 1990's Addition - Toilet Rooms/Ceramic Floor Tile - Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041338A ***Lab Sample ID:*** **042309385-0078**
Sample Description: 1990's Addition - Toilet Rooms/Ceramic Wall Tile - Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041338B ***Lab Sample ID:*** **042309385-0079**
Sample Description: 1990's Addition - Toilet Rooms/Ceramic Wall Tile - Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041339A ***Lab Sample ID:*** **042309385-0080**

Sample Description: 1957 Addition - Classroom 37/White Sink Undercoating

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	30.0%	70.0%	None Detected	

Client Sample ID: 041339B ***Lab Sample ID:*** **042309385-0081**

Sample Description: 1957 Addition - Classroom 24/White Sink Undercoating

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	25.0%	75.0%	None Detected	

Client Sample ID: 041340A ***Lab Sample ID:*** **042309385-0082**

Sample Description: 1957 Addition - Classroom 6/Gray Sink Undercoating

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	32.0%	68.0%	None Detected	

Client Sample ID: 041340B ***Lab Sample ID:*** **042309385-0083**

Sample Description: 1957 Addition - Classroom 6/Gray Sink Undercoating

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	30.0%	70.0%	None Detected	

Client Sample ID: 041341A ***Lab Sample ID:*** **042309385-0084**

Sample Description: 1957 Addition - Classroom 37/Interior Window Glazing above Door

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 041341B ***Lab Sample ID:*** **042309385-0085**

Sample Description: 1957 Addition - Classroom 37/Interior Window Glazing above Door

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 041342A ***Lab Sample ID:*** **042309385-0086**

Sample Description: 1957 Addition - Classroom 37/2'x2' Ceiling Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	80.0%	20.0%	None Detected	

Client Sample ID: 041342B ***Lab Sample ID:*** **042309385-0087**

Sample Description: 1957 Addition - Classroom 24/2'x2' Ceiling Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	79.0%	21.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041343A ***Lab Sample ID:*** **042309385-0088**
Sample Description: 1957 Addition - Classroom 24/Gypsum Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/White	10.0%	90.0%	None Detected	

Client Sample ID: 041343B ***Lab Sample ID:*** **042309385-0089**
Sample Description: 1957 Addition - Classroom 6/Gypsum Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/White	12.0%	88.0%	None Detected	

Client Sample ID: 041344A ***Lab Sample ID:*** **042309385-0090**
Sample Description: 1957 Addition - Classroom 24/Gypsum Board Joint/Taping Compound

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041344B ***Lab Sample ID:*** **042309385-0091**
Sample Description: 1957 Addition - Classroom 6/Gypsum Board Joint/Taping Compound

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041344C ***Lab Sample ID:*** **042309385-0092**
Sample Description: 1957 Addition - Classroom 6/Gypsum Board Joint/Taping Compound

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041345A ***Lab Sample ID:*** **042309385-0093**
Sample Description: 1957 Addition - Classroom 37/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041345B ***Lab Sample ID:*** **042309385-0094**
Sample Description: 1957 Addition - Classroom 37/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041345C ***Lab Sample ID:*** **042309385-0095**
Sample Description: 1957 Addition - Classroom 37/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041345D ***Lab Sample ID:*** **042309385-0096**
Sample Description: 1957 Addition - Classroom 24/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041345E ***Lab Sample ID:*** **042309385-0097**
Sample Description: 1957 Addition - Classroom 24/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041345F ***Lab Sample ID:*** **042309385-0098**
Sample Description: 1957 Addition - Classroom 6/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041345G ***Lab Sample ID:*** **042309385-0099**
Sample Description: 1957 Addition - Classroom 6/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041346A ***Lab Sample ID:*** **042309385-0100**
Sample Description: 1957 Addition - Classroom 37/Wall Plaster - Gray Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041346B ***Lab Sample ID:*** **042309385-0101**
Sample Description: 1957 Addition - Classroom 37/Wall Plaster - Gray Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041346C ***Lab Sample ID:*** **042309385-0102**
Sample Description: 1957 Addition - Classroom 37/Wall Plaster - Gray Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041346D ***Lab Sample ID:*** **042309385-0103**
Sample Description: 1957 Addition - Classroom 24/Wall Plaster - Gray Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041346E ***Lab Sample ID:*** **042309385-0104**

Sample Description: 1957 Addition - Classroom 24/Wall Plaster - Gray Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041346F ***Lab Sample ID:*** **042309385-0105**

Sample Description: 1957 Addition - Classroom 6/Wall Plaster - Gray Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041346G ***Lab Sample ID:*** **042309385-0106**

Sample Description: 1957 Addition - Classroom 6/Wall Plaster - Gray Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041347A ***Lab Sample ID:*** **042309385-0107**

Sample Description: 1957 Addition - Classroom 24/Black Paper on Concrete Deck

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Black	55.0%	45.0%	None Detected	

Client Sample ID: 041347B ***Lab Sample ID:*** **042309385-0108**

Sample Description: 1957 Addition - Classroom 24/Black Paper on Concrete Deck

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	60.0%	40.0%	None Detected	

Client Sample ID: 041348A ***Lab Sample ID:*** **042309385-0109**

Sample Description: 1957 Addition - Classroom 37/Black Damp-Proofing - Perimeter Wall

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	0.0%	97.0%	**3% Chrysotile**	

Client Sample ID: 041348B ***Lab Sample ID:*** **042309385-0110**

Sample Description: 1957 Addition - Classroom 37/Black Damp-Proofing - Perimeter Wall

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 041349A ***Lab Sample ID:*** **042309385-0111**

Sample Description: 1957 Addition - Classroom 37/12"x12" Light Blue Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Blue	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.
200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041349B ***Lab Sample ID:*** **042309385-0112**
Sample Description: 1957 Addition - Classroom 24/12"x12" Light Blue Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Blue	0.0%	100.0%	None Detected	

Client Sample ID: 041350A ***Lab Sample ID:*** **042309385-0113**
Sample Description: 1957 Addition - Classroom 6/12"x12" Blue Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Blue	0.0%	100.0%	None Detected	

Client Sample ID: 041350B ***Lab Sample ID:*** **042309385-0114**
Sample Description: 1957 Addition - Classroom 6/12"x12" Blue Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Blue	0.0%	100.0%	None Detected	

Client Sample ID: 041351A ***Lab Sample ID:*** **042309385-0115**
Sample Description: 1957 Addition - Classroom 37/12"x12" Blue Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	0.0%	100.0%	None Detected	
TEM Grav. Reduction	4/28/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 041351B ***Lab Sample ID:*** **042309385-0116**
Sample Description: 1957 Addition - Classroom 6/12"x12" Blue Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	0.0%	100.0%	None Detected	
TEM Grav. Reduction	4/28/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 041352A ***Lab Sample ID:*** **042309385-0117**
Sample Description: 1957 Addition - Classroom 37/Formica Countertop Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041352B ***Lab Sample ID:*** **042309385-0118**
Sample Description: 1957 Addition - Classroom 37/Formica Countertop Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041353A ***Lab Sample ID:*** **042309385-0119**
Sample Description: 1957 Addition - Classroom 6/Cove Base

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041353B ***Lab Sample ID:*** **042309385-0120**
Sample Description: 1957 Addition - Classroom 6/Cove Base

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 041354A ***Lab Sample ID:*** **042309385-0121**
Sample Description: 1957 Addition - Classroom 6/Cove Base Adhesive - Light Brown

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041354B ***Lab Sample ID:*** **042309385-0122**
Sample Description: 1957 Addition - Classroom 6/Cove Base Adhesive - Light Brown

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041355A ***Lab Sample ID:*** **042309385-0123**
Sample Description: 1957 Addition - Classroom 37/Bulletin Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041355B ***Lab Sample ID:*** **042309385-0124**
Sample Description: 1957 Addition - Classroom 37/Bulletin Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041356A ***Lab Sample ID:*** **042309385-0125**
Sample Description: 1957 Addition - Classroom 37/Bulletin Board Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	10.0%	90.0%	None Detected	

Client Sample ID: 041356B ***Lab Sample ID:*** **042309385-0126**
Sample Description: 1957 Addition - Classroom 37/Bulletin Board Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	12.0%	88.0%	None Detected	

Client Sample ID: 041357A ***Lab Sample ID:*** **042309385-0127**
Sample Description: 1957 Addition - Classroom 37/Bulletin Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	95.0%	5.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041357B ***Lab Sample ID:*** **042309385-0128**
Sample Description: 1957 Addition - Classroom 37/Bulletin Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	96.0%	4.0%	None Detected	

Client Sample ID: 041358A ***Lab Sample ID:*** **042309385-0129**
Sample Description: 1957 Addition - Classroom 37/Bulletin Board Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041358B ***Lab Sample ID:*** **042309385-0130**
Sample Description: 1957 Addition - Classroom 37/Bulletin Board Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041359A ***Lab Sample ID:*** **042309385-0131**
Sample Description: 1957 Addition - Classroom 6/Bulletin Board Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041359B ***Lab Sample ID:*** **042309385-0132**
Sample Description: 1957 Addition - Classroom 6/Bulletin Board Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041360A ***Lab Sample ID:*** **042309385-0133**
Sample Description: 1950 Addition - Classroom 42/White Sink Undercoating

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	97.0%	**3% Chrysotile**	

Client Sample ID: 041360B ***Lab Sample ID:*** **042309385-0134**
Sample Description: 1950 Addition - Classroom 2/White Sink Undercoating

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 041361A ***Lab Sample ID:*** **042309385-0135**
Sample Description: 1950 Addition - Classroom 1/Light Gray Sink Undercoating

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.
200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041361B ***Lab Sample ID:*** **042309385-0136**
Sample Description: 1950 Addition - Classroom 1/Light Gray Sink Undercoating

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041362A ***Lab Sample ID:*** **042309385-0137**
Sample Description: 1950 Addition - Classroom 4/Dark Gray Sink Undercoating

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041362B ***Lab Sample ID:*** **042309385-0138**
Sample Description: 1950 Addition - Classroom 4/Dark Gray Sink Undercoating

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041363A ***Lab Sample ID:*** **042309385-0139**
Sample Description: 1950 Addition - Mech. Rm./Duct Pin Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041363B ***Lab Sample ID:*** **042309385-0140**
Sample Description: 1950 Addition - Mech. Rm./Duct Pin Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041364A ***Lab Sample ID:*** **042309385-0141**
Sample Description: 1950 Addition - Mech. Rm./Duct Insulation Residue - White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	46.0%	42.0%	**12% Chrysotile**	

Client Sample ID: 041364B ***Lab Sample ID:*** **042309385-0142**
Sample Description: 1950 Addition - Mech. Rm./Duct Insulation Residue - White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 041364C ***Lab Sample ID:*** **042309385-0143**
Sample Description: 1950 Addition - Mech. Rm./Duct Insulation Residue - White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023				Positive Stop (Not Analyzed)	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041365A ***Lab Sample ID:*** **042309385-0144**

Sample Description: 1950 Addition - Outside Storage Room/Duct Insulation - Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/White	13.0%	66.0%	**21% Chrysotile**	

Client Sample ID: 041365B ***Lab Sample ID:*** **042309385-0145**

Sample Description: 1950 Addition - Outside Storage Room/Duct Insulation - Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 041365C ***Lab Sample ID:*** **042309385-0146**

Sample Description: 1950 Addition - Outside Storage Room/Duct Insulation - Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 041366A ***Lab Sample ID:*** **042309385-0147**

Sample Description: 1950 Addition - Mech. Rm./Pipe End Cap Insulation

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White/Yellow	21.0%	79.0%	None Detected	

Client Sample ID: 041366B ***Lab Sample ID:*** **042309385-0148**

Sample Description: 1950 Addition - Mech. Rm./Pipe End Cap Insulation

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White/Yellow	26.0%	74.0%	None Detected	

Client Sample ID: 041366C ***Lab Sample ID:*** **042309385-0149**

Sample Description: 1950 Addition - Mech. Rm./Pipe End Cap Insulation

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White/Yellow	19.0%	81.0%	None Detected	

Client Sample ID: 041367A ***Lab Sample ID:*** **042309385-0150**

Sample Description: 1950 Addition - Attic/Mineral Wool Loose Insulation

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	65.0%	35.0%	None Detected	

Client Sample ID: 041367B ***Lab Sample ID:*** **042309385-0151**

Sample Description: 1950 Addition - Mech. Rm./Mineral Wool Loose Insulation

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	65.0%	35.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041367C ***Lab Sample ID:*** **042309385-0152**
Sample Description: 1950 Addition - Mech. Rm./Mineral Wool Loose Insulation

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	66.0%	34.0%	None Detected	

Client Sample ID: 041368A ***Lab Sample ID:*** **042309385-0153**
Sample Description: 1950 Addition - Boiler Room/Spray-Applied Fireproofing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	56.0%	44.0%	None Detected	

Client Sample ID: 041368B ***Lab Sample ID:*** **042309385-0154**
Sample Description: 1950 Addition - Boiler Room/Spray-Applied Fireproofing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	52.0%	48.0%	None Detected	

Client Sample ID: 041368C ***Lab Sample ID:*** **042309385-0155**
Sample Description: 1950 Addition - Boiler Room/Spray-Applied Fireproofing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	49.0%	51.0%	None Detected	

Client Sample ID: 041368D ***Lab Sample ID:*** **042309385-0156**
Sample Description: 1950 Addition - Boiler Room/Spray-Applied Fireproofing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	60.0%	40.0%	None Detected	

Client Sample ID: 041368E ***Lab Sample ID:*** **042309385-0157**
Sample Description: 1950 Addition - Boiler Room/Spray-Applied Fireproofing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	60.0%	40.0%	None Detected	

Client Sample ID: 041369A ***Lab Sample ID:*** **042309385-0158**
Sample Description: 1950 Addition - Locker Room/Red Fire Stop Caulking

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Red	3.0%	97.0%	None Detected	

Client Sample ID: 041369B ***Lab Sample ID:*** **042309385-0159**
Sample Description: 1950 Addition - Locker Room/Red Fire Stop Caulking

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Red	2.0%	98.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041370A ***Lab Sample ID:*** **042309385-0160**

Sample Description: 1950 Addition - Mech. Room./Duct Seam Caulking

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041370B ***Lab Sample ID:*** **042309385-0161**

Sample Description: 1950 Addition - Mech. Room./Duct Seam Caulking

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041371A ***Lab Sample ID:*** **042309385-0162**

Sample Description: 1950 Addition - Classroom 41/Interior Door Window Glazing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	97.0%	**3% Chrysotile**	

Client Sample ID: 041371B ***Lab Sample ID:*** **042309385-0163**

Sample Description: 1950 Addition - Classroom 42/Interior Door Window Glazing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 041372A ***Lab Sample ID:*** **042309385-0164**

Sample Description: 1950 Addition - Room 29 - Media/Interior Door Window Glazing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 041372B ***Lab Sample ID:*** **042309385-0165**

Sample Description: 1950 Addition - Room 29 - Media/Interior Door Window Glazing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 041373A ***Lab Sample ID:*** **042309385-0166**

Sample Description: 1950 Addition - Stairwell/Interior Glass Block Window Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041373B ***Lab Sample ID:*** **042309385-0167**

Sample Description: 1950 Addition - Stairwell/Interior Glass Block Window Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041374A ***Lab Sample ID:*** **042309385-0168**

Sample Description: 1950 Addition - Stairwell/Interior Window Caulk - Old Thick

TEST	Analyzed Date	Color	Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	95.0%	**5% Chrysotile**	

Client Sample ID: 041374B ***Lab Sample ID:*** **042309385-0169**

Sample Description: 1950 Addition - Stairwell/Interior Window Caulk - Old Thick

TEST	Analyzed Date	Color	Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023			Positive Stop (Not Analyzed)		

Client Sample ID: 041375A ***Lab Sample ID:*** **042309385-0170**

Sample Description: 1950 Addition - Gymnasium/Interior Window Caulk - Newer

TEST	Analyzed Date	Color	Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041375B ***Lab Sample ID:*** **042309385-0171**

Sample Description: 1950 Addition - Gymnasium/Interior Window Caulk - Newer

TEST	Analyzed Date	Color	Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041376A ***Lab Sample ID:*** **042309385-0172**

Sample Description: 1950 Addition - Gymnasium/Interior Window Caulk - Old Thick

TEST	Analyzed Date	Color	Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	96.0%	**4% Chrysotile**	

Client Sample ID: 041376B ***Lab Sample ID:*** **042309385-0173**

Sample Description: 1950 Addition - Gymnasium/Interior Window Caulk - Old Thick

TEST	Analyzed Date	Color	Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023			Positive Stop (Not Analyzed)		

Client Sample ID: 041377A ***Lab Sample ID:*** **042309385-0174**

Sample Description: 1950 Addition - Stair/Hall by 12/Interior Door Caulk

TEST	Analyzed Date	Color	Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Tan	0.0%	97.0%	**3% Chrysotile**	

Client Sample ID: 041377B ***Lab Sample ID:*** **042309385-0175**

Sample Description: 1950 Addition - Gym - Foyer Lobby/Interior Door Caulk

TEST	Analyzed Date	Color	Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	5/01/2023	Gray	0.0%	97.0%	**3% Chrysotile**	

EMSL Analytical, Inc.
200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041377C ***Lab Sample ID:*** **042309385-0176**
Sample Description: 1950 Addition - Gym - Foyer Lobby/Interior Door Caulk

TEST	Analyzed Date	Color	Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	5/01/2023	Gray	0.0%	96.0%	**4% Chrysotile**	

Client Sample ID: 041378A ***Lab Sample ID:*** **042309385-0177**
Sample Description: 1950 Addition - Gym - Foyer/Interior Door/Window Caulk

TEST	Analyzed Date	Color	Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Tan	0.0%	97.0%	**3% Chrysotile**	

Client Sample ID: 041378B ***Lab Sample ID:*** **042309385-0178**
Sample Description: 1950 Addition - Gym - Foyer/Interior Door/Window Caulk

TEST	Analyzed Date	Color	Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 041379A ***Lab Sample ID:*** **042309385-0179**
Sample Description: 1950 Addition - Classroom 3/4 - Corridor/Interior Door Caulk

TEST	Analyzed Date	Color	Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	<1%	100.0%	None Detected	

Client Sample ID: 041379B ***Lab Sample ID:*** **042309385-0180**
Sample Description: 1950 Addition - Classroom 3/4 - Corridor/Interior Door Caulk

TEST	Analyzed Date	Color	Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	3.0%	97.0%	None Detected	

Client Sample ID: 041380A ***Lab Sample ID:*** **042309385-0181**
Sample Description: 1950 Addition - Classroom 3/4 - Corridor/Interior Door Caulk

TEST	Analyzed Date	Color	Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 041380B ***Lab Sample ID:*** **042309385-0182**
Sample Description: 1950 Addition - Classroom 3/4 - Corridor/Interior Door Caulk

TEST	Analyzed Date	Color	Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 041381A ***Lab Sample ID:*** **042309385-0183**
Sample Description: 1950 Addition - Classroom 3/4 - Corridor/Interior Window Caulk

TEST	Analyzed Date	Color	Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	0.0%	97.0%	**3% Anthophyllite**	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041381B ***Lab Sample ID:*** **042309385-0184**

Sample Description: 1950 Addition - Classroom 3/4 - Corridor/Interior Window Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 041382A ***Lab Sample ID:*** **042309385-0185**

Sample Description: 1950 Addition - Classroom 41/Blackboard

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041382B ***Lab Sample ID:*** **042309385-0186**

Sample Description: 1950 Addition - Classroom 42/Blackboard

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041383A ***Lab Sample ID:*** **042309385-0187**

Sample Description: 1950 Addition - Classroom 41/Slate Window Sill

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041383B ***Lab Sample ID:*** **042309385-0188**

Sample Description: 1950 Addition - Classroom 42/Slate Window Sill

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041384A ***Lab Sample ID:*** **042309385-0189**

Sample Description: 1950 Addition - Classroom 42/Formica Counter Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Tan	0.0%	100.0%	None Detected	

Client Sample ID: 041384B ***Lab Sample ID:*** **042309385-0190**

Sample Description: 1950 Addition - Classroom 42/Formica Counter Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Tan	0.0%	100.0%	None Detected	

Client Sample ID: 041385A ***Lab Sample ID:*** **042309385-0191**

Sample Description: 1950 Addition - Classroom 41/2'x2' Ceiling Tile - Dark Brown Backing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/White	85.0%	15.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041385B ***Lab Sample ID:*** **042309385-0192**

Sample Description: 1950 Addition - Gym - Foyer Lobby/2'x2' Ceiling Tile - Dark Brown Backing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/White	88.0%	12.0%	None Detected	

Client Sample ID: 041386A ***Lab Sample ID:*** **042309385-0193**

Sample Description: 1950 Addition - Classroom 3/2'x2' Ceiling Tile - Light Tan Backing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/White	88.0%	12.0%	None Detected	

Client Sample ID: 041386B ***Lab Sample ID:*** **042309385-0194**

Sample Description: 1950 Addition - Classroom 4/2'x2' Ceiling Tile - Light Tan Backing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/White	85.0%	15.0%	None Detected	

Client Sample ID: 041387A ***Lab Sample ID:*** **042309385-0195**

Sample Description: 1950 Addition - Locker - Toilet/Gypusm Ceiling Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/White	3.0%	97.0%	None Detected	

Client Sample ID: 041387B ***Lab Sample ID:*** **042309385-0196**

Sample Description: 1950 Addition - Rm. 1 - Toilet/Gypusm Ceiling Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/White	2.0%	98.0%	None Detected	

Client Sample ID: 041388A ***Lab Sample ID:*** **042309385-0197**

Sample Description: 1950 Addition - Classroom 1/1'x1' Ceiling Tiles - Large Hole

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/White	77.0%	23.0%	None Detected	

Client Sample ID: 041388B ***Lab Sample ID:*** **042309385-0198**

Sample Description: 1950 Addition - Classroom 1/1'x1' Ceiling Tiles - Large Hole

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/White	89.0%	11.0%	None Detected	

Client Sample ID: 041389A ***Lab Sample ID:*** **042309385-0199**

Sample Description: 1950 Addition - Classroom 1/1'x1' Ceiling Tiles - Small Pin Hole

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/White	81.0%	19.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041389B ***Lab Sample ID:*** **042309385-0200**

Sample Description: 1950 Addition - Classroom 1/1'x1' Ceiling Tiles - Small Pin Hole

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	89.0%	11.0%	None Detected	

Client Sample ID: 041390A ***Lab Sample ID:*** **042309385-0201**

Sample Description: 1950 Addition - Classroom 1/1'x1' Ceiling Tiles - Smooth

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	89.0%	11.0%	None Detected	

Client Sample ID: 041390B ***Lab Sample ID:*** **042309385-0202**

Sample Description: 1950 Addition - Classroom 1/1'x1' Ceiling Tiles - Smooth

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/White	82.0%	18.0%	None Detected	

Client Sample ID: 041391A ***Lab Sample ID:*** **042309385-0203**

Sample Description: 1950 Addition - Teacher Room/Lounge/1'x1' Ceiling Tiles - Kitchenette

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	92.0%	8.0%	None Detected	

Client Sample ID: 041391B ***Lab Sample ID:*** **042309385-0204**

Sample Description: 1950 Addition - Teacher Room/Lounge/1'x1' Ceiling Tiles - Kitchenette

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	95.0%	5.0%	None Detected	

Client Sample ID: 041392A ***Lab Sample ID:*** **042309385-0205**

Sample Description: 1950 Addition - Classroom 1/1'x1' Ceiling Tiles Adhesive - Yellow

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Yellow	0.0%	100.0%	None Detected	

Client Sample ID: 041392B ***Lab Sample ID:*** **042309385-0206**

Sample Description: 1950 Addition - Classroom 1/1'x1' Ceiling Tiles Adhesive - Yellow

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Yellow	0.0%	100.0%	None Detected	

Client Sample ID: 041393A ***Lab Sample ID:*** **042309385-0207**

Sample Description: 1950 Addition - Classroom 1/1'x1' Ceiling Tiles Adhesive - Dark Brown

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041393B ***Lab Sample ID:*** **042309385-0208**

Sample Description: 1950 Addition - Classroom 1/1'x1' Ceiling Tiles Adhesive - Dark Brown

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 041394A ***Lab Sample ID:*** **042309385-0209**

Sample Description: 1950 Addition - Classroom 41/Gypsum Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Gray	4.0%	96.0%	None Detected	

Client Sample ID: 041394B ***Lab Sample ID:*** **042309385-0210**

Sample Description: 1950 Addition - Locker - Toilet/Gypsum Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Gray	2.0%	98.0%	None Detected	

Client Sample ID: 041394C ***Lab Sample ID:*** **042309385-0211**

Sample Description: 1950 Addition - Corridor/Gypsum Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Gray	2.0%	98.0%	None Detected	

Client Sample ID: 041395A ***Lab Sample ID:*** **042309385-0212**

Sample Description: 1950 Addition - Classroom 42 - Closet/Gypsum Board Taping/Joint Compound

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041395B ***Lab Sample ID:*** **042309385-0213**

Sample Description: 1950 Addition - Locker - Toilet/Gypsum Board Taping/Joint Compound

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041395C ***Lab Sample ID:*** **042309385-0214**

Sample Description: 1950 Addition - Corridor/Gypsum Board Taping/Joint Compound

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041396A ***Lab Sample ID:*** **042309385-0215**

Sample Description: 1950 Addition - Corridor Closet by 42/One Coat Ceiling Plaster

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.
200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041396B ***Lab Sample ID:*** **042309385-0216**
Sample Description: 1950 Addition - Utility Rm. by 10/One Coat Ceiling Plaster

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041396C ***Lab Sample ID:*** **042309385-0217**
Sample Description: 1950 Addition - Utility Rm. by 10/One Coat Ceiling Plaster

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041397A ***Lab Sample ID:*** **042309385-0218**
Sample Description: 1950 Addition - Outside Storage Rm. by 3/One Coat Wall Plaster

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041397B ***Lab Sample ID:*** **042309385-0219**
Sample Description: 1950 Addition - Outside Storage Rm. by 3./One Coat Wall Plaster

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041397C ***Lab Sample ID:*** **042309385-0220**
Sample Description: 1950 Addition - Outside Storage Rm by 3/One Coat Wall Plaster

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041398A ***Lab Sample ID:*** **042309385-0221**
Sample Description: 1950 Addition - Classroom 1/Ceiling Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041398B ***Lab Sample ID:*** **042309385-0222**
Sample Description: 1950 Addition - Classroom 1/Ceiling Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 041398C ***Lab Sample ID:*** **042309385-0223**
Sample Description: 1950 Addition - Janitor Closet/Storage/Ceiling Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 041399A ***Lab Sample ID:*** **042309385-0224**

Sample Description: 1950 Addition - Classroom 1/Ceiling Plaster - Tan/Gray Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041399B ***Lab Sample ID:*** **042309385-0225**

Sample Description: 1950 Addition - Classroom 1/Ceiling Plaster - Tan/Gray Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 041399C ***Lab Sample ID:*** **042309385-0226**

Sample Description: 1950 Addition - anitor Closet/Storage/Ceiling Plaster - Tan/Gray Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413100A ***Lab Sample ID:*** **042309385-0227**

Sample Description: 1950 Addition - Classroom 1/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413100B ***Lab Sample ID:*** **042309385-0228**

Sample Description: 1950 Addition - Janitor Closet/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413100C ***Lab Sample ID:*** **042309385-0229**

Sample Description: 1950 Addition - Janitor Closet/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413101A ***Lab Sample ID:*** **042309385-0230**

Sample Description: 1950 Addition - Classroom 1 - Janitor Closet/Wall Plaster - Tan/Gray Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413101B ***Lab Sample ID:*** **042309385-0231**

Sample Description: 1950 Addition - Classroom 1 - Janitor Closet/Wall Plaster - Tan/Gray Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413101C ***Lab Sample ID:*** **042309385-0232**

Sample Description: 1950 Addition - Classroom 1 - Janitor Closet/Wall Plaster - Tan/Gray Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413102A ***Lab Sample ID:*** **042309385-0233**

Sample Description: 1950 Addition - Gym - Locker Rms./Ceiling Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413102B ***Lab Sample ID:*** **042309385-0234**

Sample Description: 1950 Addition - Gym - Locker Rms./Ceiling Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413102C ***Lab Sample ID:*** **042309385-0235**

Sample Description: 1950 Addition - Gym - Locker Rms./Ceiling Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413103A ***Lab Sample ID:*** **042309385-0236**

Sample Description: 1950 Addition - Gym - Locker Rms./Ceiling Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413103B ***Lab Sample ID:*** **042309385-0237**

Sample Description: 1950 Addition - Gym - Locker Rms./Ceiling Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413103C ***Lab Sample ID:*** **042309385-0238**

Sample Description: 1950 Addition - Gym - Locker Rms./Ceiling Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413104A ***Lab Sample ID:*** **042309385-0239**

Sample Description: 1950 Addition - Gym - Locker Rms./Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413104B ***Lab Sample ID:*** **042309385-0240**

Sample Description: 1950 Addition - Gym - Locker Rms./Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413104C ***Lab Sample ID:*** **042309385-0241**

Sample Description: 1950 Addition - Gym - Corridor/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413105A ***Lab Sample ID:*** **042309385-0242**

Sample Description: 1950 Addition - Gym - Locker Rms./Wall Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413105B ***Lab Sample ID:*** **042309385-0243**

Sample Description: 1950 Addition - Gym - Locker Rms./Wall Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413105C ***Lab Sample ID:*** **042309385-0244**

Sample Description: 1950 Addition - Gym - Corridor/Wall Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413106A ***Lab Sample ID:*** **042309385-0245**

Sample Description: 1950 Addition - Media Center/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413106B ***Lab Sample ID:*** **042309385-0246**

Sample Description: 1950 Addition - Corridor/Wall Plaster -White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413106C ***Lab Sample ID:*** **042309385-0247**

Sample Description: 1950 Addition - Classroom 41/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413107A ***Lab Sample ID:*** **042309385-0248**

Sample Description: 1950 Addition - Media Center/Wall Plaster Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413107B ***Lab Sample ID:*** **042309385-0249**

Sample Description: 1950 Addition - Corridor/Wall Plaster Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413107C ***Lab Sample ID:*** **042309385-0250**

Sample Description: 1950 Addition - Classroom 42/Wall Plaster Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413108A ***Lab Sample ID:*** **042309385-0251**

Sample Description: 1950 Addition - Media Center/Ceiling Plaster White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413108B ***Lab Sample ID:*** **042309385-0252**

Sample Description: 1950 Addition - Stairwell/Ceiling Plaster White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413108C ***Lab Sample ID:*** **042309385-0253**

Sample Description: 1950 Addition - Stairwell/Ceiling Plaster White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413109A ***Lab Sample ID:*** **042309385-0254**

Sample Description: 1950 Addition - Media Center/Ceiling Plaster Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413109B ***Lab Sample ID:*** **042309385-0255**

Sample Description: 1950 Addition - Stairwell/Ceiling Plaster Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413109C ***Lab Sample ID:*** **042309385-0256**

Sample Description: 1950 Addition - Stairwell/Ceiling Plaster Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413110A ***Lab Sample ID:*** **042309385-0257**

Sample Description: 1950 Addition - Stage/Black Paper Underwood Floor

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	66.0%	34.0%	None Detected	

Client Sample ID: 0413110B ***Lab Sample ID:*** **042309385-0258**

Sample Description: 1950 Addition - Stage/Black Paper Underwood Floor

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	66.0%	34.0%	None Detected	

Client Sample ID: 0413111A ***Lab Sample ID:*** **042309385-0259**

Sample Description: 1950 Addition - Under Stage/Tar Black Block Wall

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413111B ***Lab Sample ID:*** **042309385-0260**

Sample Description: 1950 Addition - Under Stage/Tar Black Block Wall

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413112A ***Lab Sample ID:*** **042309385-0261**

Sample Description: 1950 Addition - Under Stage/Black Paper on Block Wall

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	40.0%	60.0%	None Detected	

Client Sample ID: 0413112B ***Lab Sample ID:*** **042309385-0262**

Sample Description: 1950 Addition - Under Stage/Black Paper on Block Wall

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413113A ***Lab Sample ID:*** **042309385-0263**

Sample Description: 1950 Addition - Custodial Closet by 10/9"x9" Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Tan	0.0%	92.0%	**8% Chrysotile**	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413113B ***Lab Sample ID:*** **042309385-0264**

Sample Description: 1950 Addition - Custodial Closet by 10/9"x9" Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413114A ***Lab Sample ID:*** **042309385-0265**

Sample Description: 1950 Addition - Custodial Closet by 10/9"x9" Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	
TEM Grav. Reduction	5/02/2023	Black	0.0%	98.5%	**1.5% Chrysotile**	

Client Sample ID: 0413114B ***Lab Sample ID:*** **042309385-0266**

Sample Description: 1950 Addition - Custodial Closet by 10/9"x9" Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413115A ***Lab Sample ID:*** **042309385-0267**

Sample Description: 1950 Addition - Custodial Office under Shelving/9"x9" Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	0.0%	96.0%	**4% Chrysotile**	

Client Sample ID: 0413115B ***Lab Sample ID:*** **042309385-0268**

Sample Description: 1950 Addition - Custodial Office under Shelving/9"x9" Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413116A ***Lab Sample ID:*** **042309385-0269**

Sample Description: 1950 Addition - Custodial Office under Shelving/9"x9" Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	
TEM Grav. Reduction	5/02/2023				**2.8% Chrysotile**	
					Positive Stop (Not Analyzed)	

Client Sample ID: 0413116B ***Lab Sample ID:*** **042309385-0270**

Sample Description: 1950 Addition - Custodial Office under Shelving/9"x9" Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413117A ***Lab Sample ID:*** **042309385-0271**

Sample Description: 1950 Addition - Custodial Office/12"x12" Blue Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Blue	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413117B ***Lab Sample ID:*** **042309385-0272**

Sample Description: 1950 Addition - Classroom 4/12"x12" Blue Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Blue	0.0%	100.0%	None Detected	

Client Sample ID: 0413117C ***Lab Sample ID:*** **042309385-0273**

Sample Description: 1950 Addition - Classroom 4/12"x12" Blue Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Blue	0.0%	100.0%	None Detected	

Client Sample ID: 0413118A ***Lab Sample ID:*** **042309385-0274**

Sample Description: 1950 Addition - Custodial Office/12"x12" Blue Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black/Yellow	0.0%	100.0%	None Detected	
TEM Grav. Reduction	4/28/2023	Black/Yellow/Beige	0.0%	100.0%	**<0.1% Chrysotile**	

Client Sample ID: 0413118B ***Lab Sample ID:*** **042309385-0275**

Sample Description: 1950 Addition - Classroom 4/12"x12" Blue Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/Black	0.0%	100.0%	None Detected	
TEM Grav. Reduction	4/28/2023	Brown/Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413119A ***Lab Sample ID:*** **042309385-0276**

Sample Description: 1950 Addition - Gym Office/12"x12" White Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413119B ***Lab Sample ID:*** **042309385-0277**

Sample Description: 1950 Addition - Gym Office/12"x12" White Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413120A ***Lab Sample ID:*** **042309385-0278**

Sample Description: 1950 Addition - Gym Office/12"x12" White Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black/Yellow	0.0%	100.0%	None Detected	
TEM Grav. Reduction	4/28/2023				Insufficient Material	

Client Sample ID: 0413120B ***Lab Sample ID:*** **042309385-0279**

Sample Description: 1950 Addition - Gym Office/12"x12" White Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black/Yellow	0.0%	100.0%	None Detected	
TEM Grav. Reduction	4/28/2023				Insufficient Material	

EMSL Analytical, Inc.
200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413121A ***Lab Sample ID:*** **042309385-0280**
Sample Description: 1950 Addition - Classroom 41/40/12"x12" Green/Blue Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Blue/Green	0.0%	100.0%	None Detected	

Client Sample ID: 0413121B ***Lab Sample ID:*** **042309385-0281**
Sample Description: 1950 Addition - Classroom 41/40/12"x12" Green/Blue Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Blue/Green	0.0%	100.0%	None Detected	

Client Sample ID: 0413122A ***Lab Sample ID:*** **042309385-0282**
Sample Description: 1950 Addition - Classroom 41/40/12"x12" Green/Blue Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	2.0%	98.0%	None Detected	
TEM Grav. Reduction	4/28/2023				Insufficient Material	

Client Sample ID: 0413122B ***Lab Sample ID:*** **042309385-0283**
Sample Description: 1950 Addition - Classroom 41/40/12"x12" Green/Blue Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	
TEM Grav. Reduction	4/28/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413123A ***Lab Sample ID:*** **042309385-0284**
Sample Description: 1950 Addition - Classroom 3/4 - Corridor/Cove Base

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413123B ***Lab Sample ID:*** **042309385-0285**
Sample Description: 1950 Addition - Classroom 4/Cove Base

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413124A ***Lab Sample ID:*** **042309385-0286**
Sample Description: 1950 Addition - Classroom 3/4 - Corridor/Cove Base Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Yellow	0.0%	100.0%	None Detected	

Client Sample ID: 0413124B ***Lab Sample ID:*** **042309385-0287**
Sample Description: 1950 Addition - Classroom 4/Cove Base Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White/Yellow	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413125A ***Lab Sample ID:*** **042309385-0288**

Sample Description: 1950 Addition - Classroom 42/Sink Wall - Gray Material

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Blue	10.0%	90.0%	None Detected	

Client Sample ID: 0413125B ***Lab Sample ID:*** **042309385-0289**

Sample Description: 1950 Addition - Classroom 42/Sink Wall - Gray Material

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Blue	20.0%	80.0%	None Detected	

Client Sample ID: 0413126A ***Lab Sample ID:*** **042309385-0290**

Sample Description: 1950 Addition - Classroom 42/Sink Wall - Black Material behind Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	55.0%	45.0%	None Detected	

Client Sample ID: 0413126B ***Lab Sample ID:*** **042309385-0291**

Sample Description: 1950 Addition - Classroom 42/Sink Wall - Black Material behind Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	55.0%	45.0%	None Detected	

Client Sample ID: 0413127A ***Lab Sample ID:*** **042309385-0292**

Sample Description: 1950 Addition - Classroom 42/Sink Wall - Adhesive behind Black

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413127B ***Lab Sample ID:*** **042309385-0293**

Sample Description: 1950 Addition - Classroom 42/Sink Wall - Adhesive behind Black

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413128A ***Lab Sample ID:*** **042309385-0294**

Sample Description: 1950 Addition - Corridor 3/4/Wood Panel Wall Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/Yellow	0.0%	100.0%	None Detected	

Client Sample ID: 0413128B ***Lab Sample ID:*** **042309385-0295**

Sample Description: 1950 Addition - Corridor 3/4/Wood Panel Wall Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/Yellow	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413129A ***Lab Sample ID:*** **042309385-0296**

Sample Description: 1950 Addition - Classroom 42 - Closet/Cork Bulletin Board Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413129B ***Lab Sample ID:*** **042309385-0297**

Sample Description: 1950 Addition - Classroom 41 - Closet/Cork Bulletin Board Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413130A ***Lab Sample ID:*** **042309385-0298**

Sample Description: 1950 Addition - Classroom 42/Bulletin Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/Tan	15.0%	85.0%	None Detected	

Client Sample ID: 0413130B ***Lab Sample ID:*** **042309385-0299**

Sample Description: 1950 Addition - Classroom 41/Bulletin Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/Tan	10.0%	90.0%	None Detected	

Client Sample ID: 0413131A ***Lab Sample ID:*** **042309385-0300**

Sample Description: 1950 Addition - Classroom 42/Bulletin Board - Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413131B ***Lab Sample ID:*** **042309385-0301**

Sample Description: 1950 Addition - Classroom 41/Bulletin Board - Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413132A ***Lab Sample ID:*** **042309385-0302**

Sample Description: 1950 Addition - Classroom 12/Bulletin Board - Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413132B ***Lab Sample ID:*** **042309385-0303**

Sample Description: 1950 Addition - Classroom 12/Bulletin Board - Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413133A ***Lab Sample ID:*** **042309385-0304**
Sample Description: 1950 Addition - Classroom 1/Gray Bulletin Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	85.0%	15.0%	None Detected	

Client Sample ID: 0413133B ***Lab Sample ID:*** **042309385-0305**
Sample Description: 1950 Addition - Teacher's Lounge/Gray Bulletin Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	82.0%	18.0%	None Detected	

Client Sample ID: 0413134A ***Lab Sample ID:*** **042309385-0306**
Sample Description: 1950 Addition - Corridor/Terrazzo Floor

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Tan/White	0.0%	100.0%	None Detected	

Client Sample ID: 0413134B ***Lab Sample ID:*** **042309385-0307**
Sample Description: 1950 Addition - Corridor/Terrazzo Floor

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Tan/White	0.0%	100.0%	None Detected	

Client Sample ID: 0413135A ***Lab Sample ID:*** **042309385-0308**
Sample Description: 1950 Addition - Corridor/Terrazzo Floor - Mud Bed

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413135B ***Lab Sample ID:*** **042309385-0309**
Sample Description: 1950 Addition - Corridor/Terrazzo Floor - Mud Bed

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413136A ***Lab Sample ID:*** **042309385-0310**
Sample Description: 1950 Addition - Corridor/Terrazzo Floor - Mud Bed

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Tan	6.0%	94.0%	None Detected	

Client Sample ID: 0413136B ***Lab Sample ID:*** **042309385-0311**
Sample Description: 1950 Addition - Corridor/Terrazzo Floor - Mud Bed

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Tan	10.0%	90.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413137A ***Lab Sample ID:*** **042309385-0312**
Sample Description: 1950 Addition - Classroom 1/Concrete Deck

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413137B ***Lab Sample ID:*** **042309385-0313**
Sample Description: 1950 Addition - Classroom 1/Concrete Deck

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413138A ***Lab Sample ID:*** **042309385-0314**
Sample Description: 1950 Addition - Outside Storage Room/Block Wall

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413138B ***Lab Sample ID:*** **042309385-0315**
Sample Description: 1950 Addition - Outside Storage Room/Block Wall

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413139A ***Lab Sample ID:*** **042309385-0316**
Sample Description: 1950 Addition - Outside Storage Room/Block Wall - Mortar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413139B ***Lab Sample ID:*** **042309385-0317**
Sample Description: 1950 Addition - Outside Storage Room/Block Wall - Mortar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413139C ***Lab Sample ID:*** **042309385-0318**
Sample Description: 1950 Addition - Outside Storage Room/Block Wall - Mortar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413140A ***Lab Sample ID:*** **042309385-0319**
Sample Description: 1950 Addition - Class 1/2 - Toilet/Epoxy Floor/Cove

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/Tan/White	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413140B ***Lab Sample ID:*** **042309385-0320**

Sample Description: 1950 Addition - Locker - Toilet/Epoxy Floor/Cove

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/Tan/White	0.0%	100.0%	None Detected	

Client Sample ID: 0413141A ***Lab Sample ID:*** **042309385-0321**

Sample Description: 1950 Addition - Class 1/2 - Toilet/Epoxy Floor/Cove - White Mud Bed

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413141B ***Lab Sample ID:*** **042309385-0322**

Sample Description: 1950 Addition - Class 1/2 - Toilet/Epoxy Floor/Cove - White Mud Bed

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413142A ***Lab Sample ID:*** **042309385-0323**

Sample Description: 1950 Addition - Locker Shower Wall - Behind Stage/Ceramic Wall - Adhesive - Dark Brown

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	0.0%	93.0%	**7% Chrysotile**	

Client Sample ID: 0413142B ***Lab Sample ID:*** **042309385-0324**

Sample Description: 1950 Addition - Locker Shower Wall - Behind Stage/Ceramic Wall - Adhesive - Dark Brown

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413143A ***Lab Sample ID:*** **042309385-0325**

Sample Description: 1950 Addition - Class 1 - Toilet/Ceramic Wall - Grout - Thin Tan

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White/Beige	0.0%	100.0%	None Detected	

Client Sample ID: 0413143B ***Lab Sample ID:*** **042309385-0326**

Sample Description: 1950 Addition - Janitor Closet/Ceramic Wall - Grout - Thin Tan

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White/Beige	0.0%	100.0%	None Detected	

Client Sample ID: 0413144A ***Lab Sample ID:*** **042309385-0327**

Sample Description: 1950 Addition - Class 4 - Toilet/Ceramic Wall - Grout - Thick White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413144B ***Lab Sample ID:*** **042309385-0328**

Sample Description: 1950 Addition - Class 4 - Toilet/Ceramic Wall - Grout - Thick White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413145A ***Lab Sample ID:*** **042309385-0329**

Sample Description: 1950 Addition - Class 1 - Toilet/Ceramic Wall - Mud - White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413145B ***Lab Sample ID:*** **042309385-0330**

Sample Description: 1950 Addition - Class 4 - Toilet/Ceramic Wall - Mud - White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413146A ***Lab Sample ID:*** **042309385-0331**

Sample Description: 1950 Addition - Janitor Closet by Outside Rm./Ceramic Wall - Mud - Tan

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/White	0.0%	100.0%	None Detected	

Client Sample ID: 0413146B ***Lab Sample ID:*** **042309385-0332**

Sample Description: 1950 Addition - Gym - Shower/Ceramic Wall - Mud - Tan

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/White	0.0%	100.0%	None Detected	

Client Sample ID: 0413147A ***Lab Sample ID:*** **042309385-0333**

Sample Description: 1950 Addition - Janitor Closet by Outside Rm./Ceramic Floor - Grout - Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413147B ***Lab Sample ID:*** **042309385-0334**

Sample Description: 1950 Addition - Gym - Shower/Ceramic Floor - Grout - Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Beige	0.0%	100.0%	None Detected	

Client Sample ID: 0413148A ***Lab Sample ID:*** **042309385-0335**

Sample Description: 1950 Addition - Class 4 - Toilet/Ceramic Floor - Grout - White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413148B ***Lab Sample ID:*** **042309385-0336**

Sample Description: 1950 Addition - Class 4 - Toilet/Ceramic Floor - Grout - White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413149A ***Lab Sample ID:*** **042309385-0337**

Sample Description: 1950 Addition - Class 4 - Toilet/Ceramic Floor - Mud Bed - Tan

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413149B ***Lab Sample ID:*** **042309385-0338**

Sample Description: 1950 Addition - Gym - Shower/Ceramic Floor - Mud Bed - Tan

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413150A ***Lab Sample ID:*** **042309385-0339**

Sample Description: 1950 Addition - Janitor Closet by Outside Rm./Ceramic Floor - Mud Bed - Brown

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Beige	0.0%	100.0%	None Detected	

Client Sample ID: 0413150B ***Lab Sample ID:*** **042309385-0340**

Sample Description: 1950 Addition - Janitor Closet - Rm. 10/Ceramic Floor - Mud Bed - Brown

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413151A ***Lab Sample ID:*** **042309385-0341**

Sample Description: 1902 Original Bldg. - Classroom 14/Sink Undercoating - Pink

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Pink	0.0%	97.0%	**3% Chrysotile**	

Client Sample ID: 0413151B ***Lab Sample ID:*** **042309385-0342**

Sample Description: 1902 Original Bldg. - Classroom 38/Sink Undercoating - Pink

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413152A ***Lab Sample ID:*** **042309385-0343**

Sample Description: 1902 Original Bldg. - Classroom 43/Sink Undercoating - White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	White/Pink	0.0%	97.0%	**3% Chrysotile**	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413152B ***Lab Sample ID:*** **042309385-0344**

Sample Description: 1902 Original Bldg. - Classroom 31/Sink Undercoating - White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413153A ***Lab Sample ID:*** **042309385-0345**

Sample Description: 1902 Original Bldg. - Classroom 7/Sink Undercoating - Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	25.0%	75.0%	None Detected	

Client Sample ID: 0413153B ***Lab Sample ID:*** **042309385-0346**

Sample Description: 1902 Original Bldg. - Classroom 25/Sink Undercoating - Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	20.0%	80.0%	None Detected	

Client Sample ID: 0413153C ***Lab Sample ID:*** **042309385-0347**

Sample Description: 1902 Original Bldg. - Nurses/Sink Undercoating - Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	20.0%	80.0%	None Detected	

Client Sample ID: 0413154A ***Lab Sample ID:*** **042309385-0348**

Sample Description: 1902 Original Bldg. - Corridor by 37/Fire Door Insulation

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/White	38.0%	62.0%	None Detected	

Client Sample ID: 0413154B ***Lab Sample ID:*** **042309385-0349**

Sample Description: 1902 Original Bldg. - Corridor by 37/Fire Door Insulation

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/White	35.0%	65.0%	None Detected	

Client Sample ID: 0413155A ***Lab Sample ID:*** **042309385-0350**

Sample Description: 1902 Original Bldg. - Classroom 32/Red Fire Stop

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Red/Black	2.0%	98.0%	None Detected	

Client Sample ID: 0413155B ***Lab Sample ID:*** **042309385-0351**

Sample Description: 1902 Original Bldg. - Classroom 39/Red Fire Stop

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Red/Black	<1%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413156A ***Lab Sample ID:*** **042309385-0352**

Sample Description: 1902 Original Bldg. - Attic/Batt. Insulation Backing Paper - Black

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/Black/Yellow	55.0%	45.0%	None Detected	

Client Sample ID: 0413156B ***Lab Sample ID:*** **042309385-0353**

Sample Description: 1902 Original Bldg. - Attic/Batt. Insulation Backing Paper - Black

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/Black/Yellow	60.0%	40.0%	None Detected	

Client Sample ID: 0413157A ***Lab Sample ID:*** **042309385-0354**

Sample Description: 1902 Original Bldg. - Classroom 43/Interior Window Glazing - Hard - Thin - Old

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Tan/White	5.0%	95.0%	None Detected	

Client Sample ID: 0413157B ***Lab Sample ID:*** **042309385-0355**

Sample Description: 1902 Original Bldg. - Classroom 44/Interior Window Glazing - Hard - Thin - Old

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Tan/White	10.0%	90.0%	None Detected	

Client Sample ID: 0413158A ***Lab Sample ID:*** **042309385-0356**

Sample Description: 1902 Original Bldg. - Classroom 44/Sink Backsplash Caulk - White - Newer

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413158B ***Lab Sample ID:*** **042309385-0357**

Sample Description: 1902 Original Bldg. - Classroom 22/Sink Backsplash Caulk - White - Newer

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	97.0%	**3% Anthophyllite**	

Client Sample ID: 0413159A ***Lab Sample ID:*** **042309385-0358**

Sample Description: 1902 Original Bldg. - Classroom 30/Interior Window/Sill Caulk - White - Hard

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	0.0%	100.0%	None Detected	

Client Sample ID: 0413159B ***Lab Sample ID:*** **042309385-0359**

Sample Description: 1902 Original Bldg. - Classroom 30/Interior Window/Sill Caulk - White - Hard

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413160A ***Lab Sample ID:*** **042309385-0360**

Sample Description: 1902 Original Bldg. - Library Entry/Interior Window Glazing - Black - Sticky

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black/Blue	0.0%	100.0%	None Detected	

Client Sample ID: 0413160B ***Lab Sample ID:*** **042309385-0361**

Sample Description: 1902 Original Bldg. - Library Room/Interior Window Glazing - Black - Sticky

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black/Blue	5.0%	95.0%	None Detected	

Client Sample ID: 0413161A ***Lab Sample ID:*** **042309385-0362**

Sample Description: 1902 Original Bldg. - Library Entry/Interior Door/Window Glazing - Black - Sticky

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413161B ***Lab Sample ID:*** **042309385-0363**

Sample Description: 1902 Original Bldg. - Library Entry/Interior Door/Window Glazing - Black - Sticky

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413162A ***Lab Sample ID:*** **042309385-0364**

Sample Description: 1902 Original Bldg. - Corridor/Interior Door/Window Glazing - Black - Sticky

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413162B ***Lab Sample ID:*** **042309385-0365**

Sample Description: 1902 Original Bldg. - Corridor/Interior Door/Window Glazing - Black - Sticky

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	6.0%	94.0%	None Detected	

Client Sample ID: 0413163A ***Lab Sample ID:*** **042309385-0366**

Sample Description: 1902 Original Bldg. - Classroom 43/Black Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413163B ***Lab Sample ID:*** **042309385-0367**

Sample Description: 1902 Original Bldg. - Classroom 32/Black Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Black	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413164A ***Lab Sample ID:*** **042309385-0368**

Sample Description: 1902 Original Bldg. - Classroom 43/Countertop Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/Yellow	0.0%	100.0%	None Detected	

Client Sample ID: 0413164B ***Lab Sample ID:*** **042309385-0369**

Sample Description: 1902 Original Bldg. - Classroom 43/Countertop Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/Yellow	0.0%	100.0%	None Detected	

Client Sample ID: 0413165A ***Lab Sample ID:*** **042309385-0370**

Sample Description: 1902 Original Bldg. - Classroom 9/Gray Bulletin Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	63.0%	37.0%	None Detected	

Client Sample ID: 0413165B ***Lab Sample ID:*** **042309385-0371**

Sample Description: 1902 Original Bldg. - Classroom 9/Gray Bulletin Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	68.0%	32.0%	None Detected	

Client Sample ID: 0413166A ***Lab Sample ID:*** **042309385-0372**

Sample Description: 1902 Original Bldg. - Classroom 9/Gray Bulletin Board - Canvass Cover/Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Yellow/Pink	15.0%	85.0%	None Detected	

Client Sample ID: 0413166B ***Lab Sample ID:*** **042309385-0373**

Sample Description: 1902 Original Bldg. - Classroom 9/Gray Bulletin Board - Canvass Cover/Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Yellow/Pink	15.0%	85.0%	None Detected	

Client Sample ID: 0413167A ***Lab Sample ID:*** **042309385-0374**

Sample Description: 1902 Original Bldg. - Classroom 43/Bulletin Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Tan	5.0%	95.0%	None Detected	

Client Sample ID: 0413167B ***Lab Sample ID:*** **042309385-0375**

Sample Description: 1902 Original Bldg. - Classroom 31/Bulletin Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Tan	15.0%	85.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413168A ***Lab Sample ID:*** **042309385-0376**

Sample Description: 1902 Original Bldg. - Classroom 43/Bulletin Board - Adhesive - Dark Brown

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413168B ***Lab Sample ID:*** **042309385-0377**

Sample Description: 1902 Original Bldg. - Classroom 31/Bulletin Board - Adhesive - Dark Brown

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413169A ***Lab Sample ID:*** **042309385-0378**

Sample Description: 1902 Original Bldg. - Classroom 20/Green Bulletin Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/Green	10.0%	90.0%	None Detected	

Client Sample ID: 0413169B ***Lab Sample ID:*** **042309385-0379**

Sample Description: 1902 Original Bldg. - Classroom 20/Green Bulletin Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/Green	10.0%	90.0%	None Detected	

Client Sample ID: 0413170A ***Lab Sample ID:*** **042309385-0380**

Sample Description: 1902 Original Bldg. - Classroom 20/Red Bulletin Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/Red	15.0%	85.0%	None Detected	

Client Sample ID: 0413170B ***Lab Sample ID:*** **042309385-0381**

Sample Description: 1902 Original Bldg. - Classroom 20/Red Bulletin Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/Red	10.0%	90.0%	None Detected	

Client Sample ID: 0413171A ***Lab Sample ID:*** **042309385-0382**

Sample Description: 1902 Original Bldg. - Classroom 20/Red Bulletin Board - Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413171B ***Lab Sample ID:*** **042309385-0383**

Sample Description: 1902 Original Bldg. - Classroom 20/Red Bulletin Board - Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Tan	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413172A ***Lab Sample ID:*** **042309385-0384**

Sample Description: 1902 Original Bldg. - Classroom 44/Sink Wall - Gray Layer

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Blue	15.0%	85.0%	None Detected	

Client Sample ID: 0413172B ***Lab Sample ID:*** **042309385-0385**

Sample Description: 1902 Original Bldg. - Classroom 44/Sink Wall - Gray Layer

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Blue	20.0%	80.0%	None Detected	

Client Sample ID: 0413173A ***Lab Sample ID:*** **042309385-0386**

Sample Description: 1902 Original Bldg. - Classroom 44/Sink Wall - Black Layer

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	45.0%	55.0%	None Detected	

Client Sample ID: 0413173B ***Lab Sample ID:*** **042309385-0387**

Sample Description: 1902 Original Bldg. - Classroom 44/Sink Wall - Black Layer

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	45.0%	55.0%	None Detected	

Client Sample ID: 0413174A ***Lab Sample ID:*** **042309385-0388**

Sample Description: 1902 Original Bldg. - Classroom 44/Sink Wall - Brown Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413174B ***Lab Sample ID:*** **042309385-0389**

Sample Description: 1902 Original Bldg. - Classroom 44/Sink Wall - Brown Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413175A ***Lab Sample ID:*** **042309385-0390**

Sample Description: 1902 Original Bldg. - Classroom 7/Bulletin Board Adhesive - Brown/Tan

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413175B ***Lab Sample ID:*** **042309385-0391**

Sample Description: 1902 Original Bldg. - Classroom 9/Bulletin Board Adhesive - Brown/Tan

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413176A ***Lab Sample ID:*** **042309385-0392**

Sample Description: 1902 Original Bldg. - Library/Wall Adhesive - Brown

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413176B ***Lab Sample ID:*** **042309385-0393**

Sample Description: 1902 Original Bldg. - Library/Wall Adhesive - Brown

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413177A ***Lab Sample ID:*** **042309385-0394**

Sample Description: 1902 Original Bldg. - Classroom 7/Wall Adhesive - White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413177B ***Lab Sample ID:*** **042309385-0395**

Sample Description: 1902 Original Bldg. - Classroom 7/Wall Adhesive - White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413178A ***Lab Sample ID:*** **042309385-0396**

Sample Description: 1902 Original Bldg. - Classroom 8/Wall Adhesive - Yellow

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Yellow	0.0%	100.0%	None Detected	

Client Sample ID: 0413178B ***Lab Sample ID:*** **042309385-0397**

Sample Description: 1902 Original Bldg. - Classroom 8/Wall Adhesive - Yellow

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Yellow	0.0%	100.0%	None Detected	

Client Sample ID: 0413179A ***Lab Sample ID:*** **042309385-0398**

Sample Description: 1902 Original Bldg. - Classroom 44/2'x2'/2'x4' Ceiling Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	65.0%	35.0%	None Detected	

Client Sample ID: 0413179B ***Lab Sample ID:*** **042309385-0399**

Sample Description: 1902 Original Bldg. - Classroom 43/2'x2'/2'x4' Ceiling Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	60.0%	40.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413180A ***Lab Sample ID:*** **042309385-0400**

Sample Description: 1902 Original Bldg. - Classroom 5/2'x4' Ceiling Tiles - Tan Backing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/White	50.0%	50.0%	None Detected	

Client Sample ID: 0413180B ***Lab Sample ID:*** **042309385-0401**

Sample Description: 1902 Original Bldg. - Classroom 5/2'x4' Ceiling Tiles - Tan Backing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/White	55.0%	45.0%	None Detected	

Client Sample ID: 0413181A ***Lab Sample ID:*** **042309385-0402**

Sample Description: 1902 Original Bldg. - Library/2'x4' Ceiling Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/White	55.0%	45.0%	None Detected	

Client Sample ID: 0413181B ***Lab Sample ID:*** **042309385-0403**

Sample Description: 1902 Original Bldg. - Library/2'x4' Ceiling Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/White	55.0%	45.0%	None Detected	

Client Sample ID: 0413182A ***Lab Sample ID:*** **042309385-0404**

Sample Description: 1902 Original Bldg. - Toilet by 9/2'x4' Gypsum Ceiling Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/White	30.0%	70.0%	None Detected	

Client Sample ID: 0413182B ***Lab Sample ID:*** **042309385-0405**

Sample Description: 1902 Original Bldg. - Toilet by 9/2'x4' Gypsum Ceiling Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/White	4.0%	96.0%	None Detected	

Client Sample ID: 0413183A ***Lab Sample ID:*** **042309385-0406**

Sample Description: 1902 Original Bldg. - Corridor/Gypsum Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	35.0%	65.0%	None Detected	

Client Sample ID: 0413183B ***Lab Sample ID:*** **042309385-0407**

Sample Description: 1902 Original Bldg. - Nurse/Gypsum Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	6.0%	94.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413183C ***Lab Sample ID:*** **042309385-0408**

Sample Description: 1902 Original Bldg. - Classroom 7/Gypsum Board

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	6.0%	94.0%	None Detected	

Client Sample ID: 0413184A ***Lab Sample ID:*** **042309385-0409**

Sample Description: 1902 Original Bldg. - Classroom 31 - Closet/Gypsum Board Joint/Tape Compound

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413184B ***Lab Sample ID:*** **042309385-0410**

Sample Description: 1902 Original Bldg. - Library/Gypsum Board Joint/Tape Compound

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413184C ***Lab Sample ID:*** **042309385-0411**

Sample Description: 1902 Original Bldg. - Classroom 7/Gypsum Board Joint/Tape Compound

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413185A ***Lab Sample ID:*** **042309385-0412**

Sample Description: 1902 Original Bldg. - Classroom 9/One Coat Plaster Ceiling

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	<1%	100.0%	None Detected	

Client Sample ID: 0413185B ***Lab Sample ID:*** **042309385-0413**

Sample Description: 1902 Original Bldg. - Classroom 5 - Closet/One Coat Plaster Ceiling

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	<1%	100.0%	None Detected	

Client Sample ID: 0413185C ***Lab Sample ID:*** **042309385-0414**

Sample Description: 1902 Original Bldg. - Classroom 5 - Closet/One Coat Plaster Ceiling

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413186A ***Lab Sample ID:*** **042309385-0415**

Sample Description: 1902 Original Bldg. - Corridor/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413186B ***Lab Sample ID:*** **042309385-0416**

Sample Description: 1902 Original Bldg. - Corridor/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413186C ***Lab Sample ID:*** **042309385-0417**

Sample Description: 1902 Original Bldg. - Classroom 7/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413187A ***Lab Sample ID:*** **042309385-0418**

Sample Description: 1902 Original Bldg. - Corridor/Wall Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413187B ***Lab Sample ID:*** **042309385-0419**

Sample Description: 1902 Original Bldg. - Corridor/Wall Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413187C ***Lab Sample ID:*** **042309385-0420**

Sample Description: 1902 Original Bldg. - Classroom 7/Wall Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413188A ***Lab Sample ID:*** **042309385-0421**

Sample Description: 1902 Original Bldg. - Classroom 23/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413188B ***Lab Sample ID:*** **042309385-0422**

Sample Description: 1902 Original Bldg. - Classroom 28/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413188C ***Lab Sample ID:*** **042309385-0423**

Sample Description: 1902 Original Bldg. - Corridor/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413189A ***Lab Sample ID:*** **042309385-0424**

Sample Description: 1902 Original Bldg. - Classroom 23/Wall Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413189B ***Lab Sample ID:*** **042309385-0425**

Sample Description: 1902 Original Bldg. - Classroom 28/Wall Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413189C ***Lab Sample ID:*** **042309385-0426**

Sample Description: 1902 Original Bldg. - Corridor/Wall Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413190A ***Lab Sample ID:*** **042309385-0427**

Sample Description: 1902 Original Bldg. - Classroom 23/Ceiling Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413190B ***Lab Sample ID:*** **042309385-0428**

Sample Description: 1902 Original Bldg. - Classroom 25/Ceiling Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413190C ***Lab Sample ID:*** **042309385-0429**

Sample Description: 1902 Original Bldg. - Classroom 28/Ceiling Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413191A ***Lab Sample ID:*** **042309385-0430**

Sample Description: 1902 Original Bldg. - Classroom 23/Ceiling Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413191B ***Lab Sample ID:*** **042309385-0431**

Sample Description: 1902 Original Bldg. - Classroom 25/Ceiling Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Tan	<1%	98.0%	**2% Chrysotile**	
400 PLM Pt Ct	4/26/2023	Gray/Tan	0.0%	98.3%	**1.75% Chrysotile**	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413191C ***Lab Sample ID:*** **042309385-0432**

Sample Description: 1902 Original Bldg. - Classroom 28/Ceiling Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413192A ***Lab Sample ID:*** **042309385-0433**

Sample Description: 1902 Original Bldg. - Classroom 31/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413192B ***Lab Sample ID:*** **042309385-0434**

Sample Description: 1902 Original Bldg. - Classroom 43/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413192C ***Lab Sample ID:*** **042309385-0435**

Sample Description: 1902 Original Bldg. - Classroom 44/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413193A ***Lab Sample ID:*** **042309385-0436**

Sample Description: 1902 Original Bldg. - Classroom 31/Wall Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413193B ***Lab Sample ID:*** **042309385-0437**

Sample Description: 1902 Original Bldg. - Classroom 43/Wall Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413193C ***Lab Sample ID:*** **042309385-0438**

Sample Description: 1902 Original Bldg. - Classroom 44/Wall Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	<1%	100.0%	None Detected	

Client Sample ID: 0413194A ***Lab Sample ID:*** **042309385-0439**

Sample Description: 1902 Original Bldg. - Classroom 31/Ceiling Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413194B ***Lab Sample ID:*** **042309385-0440**

Sample Description: 1902 Original Bldg. - Classroom 43/Ceiling Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413194C ***Lab Sample ID:*** **042309385-0441**

Sample Description: 1902 Original Bldg. - Classroom 44/Ceiling Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413195A ***Lab Sample ID:*** **042309385-0442**

Sample Description: 1902 Original Bldg. - Classroom 31/Ceiling Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	<1%	98.0%	**2% Chrysotile**	
400 PLM Pt Ct	4/26/2023	Tan/White	0.0%	98.5%	**1.50% Chrysotile**	

Client Sample ID: 0413195B ***Lab Sample ID:*** **042309385-0443**

Sample Description: 1902 Original Bldg. - Classroom 43/Ceiling Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	5/10/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413195C ***Lab Sample ID:*** **042309385-0444**

Sample Description: 1902 Original Bldg. - Classroom 44/Ceiling Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	5/10/2023	Brown	0.0%	100.0%	None Detected	

Client Sample ID: 0413196A ***Lab Sample ID:*** **042309385-0445**

Sample Description: 1902 Original Bldg. - Main Office/18"x18" Floor Material

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413196B ***Lab Sample ID:*** **042309385-0446**

Sample Description: 1902 Original Bldg. - Main Office/18"x18" Floor Material

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413197A ***Lab Sample ID:*** **042309385-0447**

Sample Description: 1902 Original Bldg. - Main Office/18"x18" Floor - Gray Material

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413197B ***Lab Sample ID:*** **042309385-0448**

Sample Description: 1902 Original Bldg. - Main Office/18"x18" Floor - Gray Material

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413198A ***Lab Sample ID:*** **042309385-0449**

Sample Description: 1902 Original Bldg. - Main Office/18"x18" Floor - Yellow Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Yellow	3.0%	97.0%	None Detected	

Client Sample ID: 0413198B ***Lab Sample ID:*** **042309385-0450**

Sample Description: 1902 Original Bldg. - Main Office/18"x18" Floor - Yellow Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Yellow	2.0%	98.0%	None Detected	

Client Sample ID: 0413199A ***Lab Sample ID:*** **042309385-0451**

Sample Description: 1902 Original Bldg. - Lower Floor - Stairwell/Gray Floor Leveler

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413199B ***Lab Sample ID:*** **042309385-0452**

Sample Description: 1902 Original Bldg. - Lower Floor - Stairwell/Gray Floor Leveler

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413200A ***Lab Sample ID:*** **042309385-0453**

Sample Description: 1902 Original Bldg. - Stairwell 35/Older Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413200B ***Lab Sample ID:*** **042309385-0454**

Sample Description: 1902 Original Bldg. - Lower Level/Older Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413201A ***Lab Sample ID:*** **042309385-0455**

Sample Description: 1902 Original Bldg. - Stairwell 35/Older Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	2.0%	98.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413201B ***Lab Sample ID:*** **042309385-0456**

Sample Description: 1902 Original Bldg. - Lower Level/Older Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413202A ***Lab Sample ID:*** **042309385-0457**

Sample Description: 1902 Original Bldg. - Classroom 43/12"x12" Light Blue Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Green	3.0%	97.0%	None Detected	

Client Sample ID: 0413202B ***Lab Sample ID:*** **042309385-0458**

Sample Description: 1902 Original Bldg. - Lower Level - Corridor/12"x12" Light Blue Floor Tile

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Green	5.0%	95.0%	None Detected	

Client Sample ID: 0413203A ***Lab Sample ID:*** **042309385-0459**

Sample Description: 1902 Original Bldg. - Classroom 43/12"x12" Light Blue Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	15.0%	85.0%	None Detected	
TEM Grav. Reduction	4/28/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413203B ***Lab Sample ID:*** **042309385-0460**

Sample Description: 1902 Original Bldg. - Lower Level - Corridor/12"x12" Light Blue Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	14.0%	86.0%	None Detected	
TEM Grav. Reduction	4/28/2023	Black	0.00%	99.90%	**0.10% Chrysotile**	

Client Sample ID: 0413203C ***Lab Sample ID:*** **042309385-0461**

Sample Description: 1902 Original Bldg. - Classroom 9/12"x12" Light Blue Floor Tile - Black Mastic

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Black	7.0%	93.0%	None Detected	
TEM Grav. Reduction	4/28/2023	Gray/Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413204A ***Lab Sample ID:*** **042309385-0462**

Sample Description: 1902 Original Bldg. - Classroom 30/Red Floor Material under Plywood

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Red	0.0%	100.0%	None Detected	

Client Sample ID: 0413204B ***Lab Sample ID:*** **042309385-0463**

Sample Description: 1902 Original Bldg. - Classroom 30/Red Floor Material under Plywood

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Red	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413205A ***Lab Sample ID:*** **042309385-0464**

Sample Description: 1902 Original Bldg. - Classroom 39/Paper under Plywood

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown	88.0%	12.0%	None Detected	

Client Sample ID: 0413205B ***Lab Sample ID:*** **042309385-0465**

Sample Description: 1902 Original Bldg. - Classroom 39/Paper under Plywood

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/Tan	87.0%	13.0%	None Detected	

Client Sample ID: 0413206A ***Lab Sample ID:*** **042309385-0466**

Sample Description: 1902 Original Bldg. - Stairwell/Rubber Floor Adhesive - Yellow

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Tan	5.0%	95.0%	None Detected	

Client Sample ID: 0413206B ***Lab Sample ID:*** **042309385-0467**

Sample Description: 1902 Original Bldg. - Stairwell/Rubber Floor Adhesive - Yellow

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray/Tan/Black	4.0%	96.0%	None Detected	

Client Sample ID: 0413207 ***Lab Sample ID:*** **042309385-0468**

Sample Description: 1902 Original Bldg. - Stairwell/Black Mastic under Rubber Floor

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	1.0%	99.0%	None Detected	
TEM Grav. Reduction	4/28/2023	Black	0.00%	99.83%	**0.17% Chrysotile**	

Client Sample ID: 0413208A ***Lab Sample ID:*** **042309385-0469**

Sample Description: 1902 Original Bldg. - Library/Carpet Adhesive - Yellow

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Yellow	3.0%	97.0%	None Detected	

Client Sample ID: 0413208B ***Lab Sample ID:*** **042309385-0470**

Sample Description: 1902 Original Bldg. - Library/Carpet Adhesive Y- ellow

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Yellow/Green	10.0%	90.0%	None Detected	

Client Sample ID: 0413209A ***Lab Sample ID:*** **042309385-0471**

Sample Description: 1902 Original Bldg. - Toilet Room by 7/Epoxy Floor

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/Tan	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413209B ***Lab Sample ID:*** **042309385-0472**

Sample Description: 1902 Original Bldg. - Toilet Room by 7/Epoxy Floor

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Brown/Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413210A ***Lab Sample ID:*** **042309385-0473**

Sample Description: 1902 Original Bldg. - 2nd Floor - Corridor/Terrazzo Floor

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413210B ***Lab Sample ID:*** **042309385-0474**

Sample Description: 1902 Original Bldg. - 2nd Floor - Corridor/Terrazzo Floor

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	3.0%	97.0%	None Detected	

Client Sample ID: 0413211A ***Lab Sample ID:*** **042309385-0475**

Sample Description: 1902 Original Bldg. - 2nd Floor - Corridor/Terrazzo Floor - Mud Bed

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	3.0%	97.0%	None Detected	

Client Sample ID: 0413211B ***Lab Sample ID:*** **042309385-0476**

Sample Description: 1902 Original Bldg. - 2nd Floor - Corridor/Terrazzo Floor - Mud Bed

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Gray	3.0%	97.0%	None Detected	

Client Sample ID: 0413212A ***Lab Sample ID:*** **042309385-0477**

Sample Description: 1902 Original Bldg. - Classroom 43/Dark Cove Base

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413212B ***Lab Sample ID:*** **042309385-0478**

Sample Description: 1902 Original Bldg. - Corridor at 5/Dark Cove Base

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413213A ***Lab Sample ID:*** **042309385-0479**

Sample Description: 1902 Original Bldg. - Classroom 43/Dark Cove Base - Adhesive - Yellow

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Yellow	6.0%	94.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413213B ***Lab Sample ID:*** **042309385-0480**

Sample Description: 1902 Original Bldg. - Corridor at 5/Dark Cove Base - Adhesive - Yellow

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Yellow	0.0%	100.0%	None Detected	

Client Sample ID: 0413214A ***Lab Sample ID:*** **042309385-0481**

Sample Description: 1902 Original Bldg. - Nurse Office/Cove Base

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413214B ***Lab Sample ID:*** **042309385-0482**

Sample Description: 1902 Original Bldg. - Library/Cove Base

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413214C ***Lab Sample ID:*** **042309385-0483**

Sample Description: 1902 Original Bldg. - Stairwell/Cove Base

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413215A ***Lab Sample ID:*** **042309385-0484**

Sample Description: 1902 Original Bldg. - Nurse Office/Cove Base - Adhesive - White/Tan

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Tan/White	0.0%	100.0%	None Detected	

Client Sample ID: 0413215B ***Lab Sample ID:*** **042309385-0485**

Sample Description: 1902 Original Bldg. - Library/Cove Base - Adhesive - White/Tan

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Tan	6.0%	94.0%	None Detected	

Client Sample ID: 0413215C ***Lab Sample ID:*** **042309385-0486**

Sample Description: 1902 Original Bldg. - Stairwell/Cove Base - Adhesive - White/Tan

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413216 ***Lab Sample ID:*** **042309385-0487**

Sample Description: 1902 Original Bldg. - Lower Level - Corridor/Cove Base

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413217 ***Lab Sample ID:*** **042309385-0488**

Sample Description: 1902 Original Bldg. - Lower Level - Corridor/Cove Base Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Tan/Clear	3.0%	97.0%	None Detected	

Client Sample ID: 0413218A ***Lab Sample ID:*** **042309385-0489**

Sample Description: 1902 Original Bldg. - Library/Dark Leveler/Floor Material

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413218B ***Lab Sample ID:*** **042309385-0490**

Sample Description: 1902 Original Bldg. - Library/Dark Leveler/Floor Material

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/25/2023	Tan/Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413219A ***Lab Sample ID:*** **042309385-0491**

Sample Description: 1902 Original Bldg. - Library/Beige Concrete Floor Material

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	0.0%	100.0%	**<1% Tremolite**	
400 PLM Pt Ct	4/26/2023	Tan	0.00%	99.25%	**0.75% Tremolite**	

Client Sample ID: 0413219B ***Lab Sample ID:*** **042309385-0492**

Sample Description: 1902 Original Bldg. - Library/Beige Concrete Floor Material

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413220A ***Lab Sample ID:*** **042309385-0493**

Sample Description: 1902 Original Bldg. - Library/Gray Concrete Floor Material

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413220B ***Lab Sample ID:*** **042309385-0494**

Sample Description: 1902 Original Bldg. - Library/Gray Concrete Floor Material

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413221A ***Lab Sample ID:*** **042309385-0495**

Sample Description: 1902 Original Bldg. - Attic/Brick Wall

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Red	3.0%	97.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413221B ***Lab Sample ID:*** **042309385-0496**
Sample Description: 1902 Original Bldg. - Attic/Brick Wall

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Red	3.0%	97.0%	None Detected	

Client Sample ID: 0413222A ***Lab Sample ID:*** **042309385-0497**
Sample Description: 1902 Original Bldg. - Attic/Newer Brick

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Red	3.0%	97.0%	None Detected	

Client Sample ID: 0413222B ***Lab Sample ID:*** **042309385-0498**
Sample Description: 1902 Original Bldg. - Attic/Newer Brick

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Red	3.0%	97.0%	None Detected	

Client Sample ID: 0413223A ***Lab Sample ID:*** **042309385-0499**
Sample Description: 1902 Original Bldg. - Attic/Brick Wall Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	3.0%	97.0%	None Detected	

Client Sample ID: 0413223B ***Lab Sample ID:*** **042309385-0500**
Sample Description: 1902 Original Bldg. - Attic/Brick Wall Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	3.0%	97.0%	None Detected	

Client Sample ID: 0413224A ***Lab Sample ID:*** **042309385-0501**
Sample Description: 1902 Original Bldg. - Attic/Wall Mortar/Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413224B ***Lab Sample ID:*** **042309385-0502**
Sample Description: 1902 Original Bldg. - Attic/Wall Mortar/Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413225A ***Lab Sample ID:*** **042309385-0503**
Sample Description: 1902 Original Bldg. - Attic/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413225B ***Lab Sample ID:*** **042309385-0504**

Sample Description: 1902 Original Bldg. - Attic/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413225C ***Lab Sample ID:*** **042309385-0505**

Sample Description: 1902 Original Bldg. - Attic/Wall Plaster - White Finish Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	0.0%	100.0%	None Detected	

Client Sample ID: 0413226A ***Lab Sample ID:*** **042309385-0506**

Sample Description: 1902 Original Bldg. - Attic/Wall Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	0.0%	98.0%	**2% Chrysotile**	
400 PLM Pt Ct	4/26/2023	Tan	0.0%	97.8%	**2.25% Chrysotile**	

Client Sample ID: 0413226B ***Lab Sample ID:*** **042309385-0507**

Sample Description: 1902 Original Bldg. - Attic/Wall Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413226C ***Lab Sample ID:*** **042309385-0508**

Sample Description: 1902 Original Bldg. - Attic/Wall Plaster - Gray/Tan Rough Coat

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413227A ***Lab Sample ID:*** **042309385-0509**

Sample Description: 1902 Original Bldg. - Attic/Hard Gray Floor Material Plaster

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Black	3.0%	97.0%	None Detected	

Client Sample ID: 0413227B ***Lab Sample ID:*** **042309385-0510**

Sample Description: 1902 Original Bldg. - Attic/Hard Gray Floor Material Plaster

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413228A ***Lab Sample ID:*** **042309385-0511**

Sample Description: 1950 Addition - Attic/Hard Gray Floor Material Plaster

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413228B ***Lab Sample ID:*** **042309385-0512**

Sample Description: 1950 Addition - Attic/Hard Gray Floor Material Plaster

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	3.0%	97.0%	None Detected	

Client Sample ID: 0413229A ***Lab Sample ID:*** **042309385-0513**

Sample Description: 1902 Original Bldg. - 2nd Floor - Corridor Toilet/Ceramic Wall - Mud Bed - Brown/White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	3.0%	97.0%	None Detected	

Client Sample ID: 0413229B ***Lab Sample ID:*** **042309385-0514**

Sample Description: 1902 Original Bldg. - 2nd Floor - Corridor Toilet/Ceramic Wall - Mud Bed - Brown/White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	3.0%	97.0%	None Detected	

Client Sample ID: 0413230A ***Lab Sample ID:*** **042309385-0515**

Sample Description: 1902 Original Bldg. - 2nd Floor - Last Closet/Ceramic Wall - Mud Bed - Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	3.0%	97.0%	None Detected	

Client Sample ID: 0413230B ***Lab Sample ID:*** **042309385-0516**

Sample Description: 1902 Original Bldg. - 2nd Floor - Last Closet/Ceramic Wall - Mud Bed - Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413231A ***Lab Sample ID:*** **042309385-0517**

Sample Description: 1902 Original Bldg. - Main Office - Toilet/Ceramic Wall Tile - Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413231B ***Lab Sample ID:*** **042309385-0518**

Sample Description: 1902 Original Bldg. - Main Office - Toilet/Ceramic Wall Tile - Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	3.0%	97.0%	None Detected	

Client Sample ID: 0413231C ***Lab Sample ID:*** **042309385-0519**

Sample Description: 1902 Original Bldg. - Room 8 - Toilet/Ceramic Wall Tile - Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	3.0%	97.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413232A ***Lab Sample ID:*** **042309385-0520**

Sample Description: 1902 Original Bldg. - Main Office - Toilet/Ceramic Wall Tile - Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	3.0%	97.0%	None Detected	

Client Sample ID: 0413232B ***Lab Sample ID:*** **042309385-0521**

Sample Description: 1902 Original Bldg. - Main Office - Toilet/Ceramic Wall Tile - Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	3.0%	97.0%	None Detected	

Client Sample ID: 0413233A ***Lab Sample ID:*** **042309385-0522**

Sample Description: 1902 Original Bldg. - Custodial Closet/Ceramic Wall Tile - Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	3.0%	97.0%	None Detected	

Client Sample ID: 0413233B ***Lab Sample ID:*** **042309385-0523**

Sample Description: 1902 Original Bldg. - Custodial Closet/Ceramic Wall Tile - Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	3.0%	97.0%	None Detected	

Client Sample ID: 0413234A ***Lab Sample ID:*** **042309385-0524**

Sample Description: 1902 Original Bldg. - 2nd Men's Toilet/Ceramic Wall Tile - Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Tan	3.0%	97.0%	None Detected	

Client Sample ID: 0413234B ***Lab Sample ID:*** **042309385-0525**

Sample Description: 1902 Original Bldg. - Women's Toilet/Ceramic Wall Tile - Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Tan	3.0%	97.0%	None Detected	

Client Sample ID: 0413235 ***Lab Sample ID:*** **042309385-0526**

Sample Description: 1902 Original Bldg. - Classroom 8 - Toilet/Ceramic Wall Tile - Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	0.0%	100.0%	None Detected	

Client Sample ID: 0413236A ***Lab Sample ID:*** **042309385-0527**

Sample Description: 1902 Original Bldg. - Men's Toilet/Ceramic Floor - Mud Bed - White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	3.0%	97.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413236B ***Lab Sample ID:*** **042309385-0528**

Sample Description: 1902 Original Bldg. - Men's Toilet/Ceramic Floor - Mud Bed - White

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	0.0%	100.0%	None Detected	

Client Sample ID: 0413237A ***Lab Sample ID:*** **042309385-0529**

Sample Description: 1902 Original Bldg. - Custodial Closet/Ceramic Floor - Mud Bed - Tan/Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Tan	3.0%	97.0%	None Detected	

Client Sample ID: 0413237B ***Lab Sample ID:*** **042309385-0530**

Sample Description: 1902 Original Bldg. - Custodial Closet/Ceramic Floor - Mud Bed - Tan/Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413238A ***Lab Sample ID:*** **042309385-0531**

Sample Description: 1902 Original Bldg. - Main Office - Toilet/Ceramic Floor - Mud Bed - Thin Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	3.0%	97.0%	None Detected	

Client Sample ID: 0413238B ***Lab Sample ID:*** **042309385-0532**

Sample Description: 1902 Original Bldg. - Main Office - Toilet/Ceramic Floor - Mud Bed - Thin Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413239A ***Lab Sample ID:*** **042309385-0533**

Sample Description: 1902 Original Bldg. - Main Office - Toilet/Ceramic Floor Tile - Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413239B ***Lab Sample ID:*** **042309385-0534**

Sample Description: 1902 Original Bldg. - Main Office - Toilet/Ceramic Floor Tile - Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	3.0%	97.0%	None Detected	

Client Sample ID: 0413239C ***Lab Sample ID:*** **042309385-0535**

Sample Description: 1902 Original Bldg. - Classroom 8 - Toilet/Ceramic Floor Tile - Adhesive

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413240A ***Lab Sample ID:*** **042309385-0536**

Sample Description: 1902 Original Bldg. - Custodial Closet/Ceramic Floor Tile - Grout - Dark Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	3.0%	97.0%	None Detected	

Client Sample ID: 0413240B ***Lab Sample ID:*** **042309385-0537**

Sample Description: 1902 Original Bldg. - Main Office - Toilet/Ceramic Floor Tile - Grout - Dark Gray

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413241A ***Lab Sample ID:*** **042309385-0538**

Sample Description: 1902 Original Bldg. -Men's Toilet/Ceramic Floor Tile Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	3.0%	97.0%	None Detected	

Client Sample ID: 0413241B ***Lab Sample ID:*** **042309385-0539**

Sample Description: 1902 Original Bldg. -Men's Toilet/Ceramic Floor Tile Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413242 ***Lab Sample ID:*** **042309385-0540**

Sample Description: 1902 Original Bldg. -Class 8 - Toilet/Ceramic Floor Grout

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413243A ***Lab Sample ID:*** **042309385-0541**

Sample Description: Tunnels/Debris - Black Paper

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	15.0%	85.0%	None Detected	

Client Sample ID: 0413243B ***Lab Sample ID:*** **042309385-0542**

Sample Description: Tunnels/Debris - Black Paper

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	34.0%	66.0%	None Detected	

Client Sample ID: 0413244A ***Lab Sample ID:*** **042309385-0543**

Sample Description: Tunnels - Gym Office Area/Debris - Tan Paper

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown	50.0%	50.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413244B ***Lab Sample ID:*** **042309385-0544**

Sample Description: Tunnels - Gym Office Area/Debris - Tan Paper

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Tan	70.0%	30.0%	None Detected	

Client Sample ID: 0413245A ***Lab Sample ID:*** **042309385-0545**

Sample Description: Tunnels - Perimeter at Ceiling - Gym/Black Tar Paper

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Black	8.0%	79.0%	**13% Chrysotile**	

Client Sample ID: 0413245B ***Lab Sample ID:*** **042309385-0546**

Sample Description: Tunnels - Perimeter at Ceiling - Gym/Black Tar Paper

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413246A ***Lab Sample ID:*** **042309385-0547**

Sample Description: Tunnels - BR/10 Area/Black Tar Paper

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	9.0%	79.0%	**12% Chrysotile**	

Client Sample ID: 0413246B ***Lab Sample ID:*** **042309385-0548**

Sample Description: Tunnels - BR/10 Area/Black Tar Paper

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413247A ***Lab Sample ID:*** **042309385-0549**

Sample Description: 1990s Addition/Exterior Window Sill Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413247B ***Lab Sample ID:*** **042309385-0550**

Sample Description: 1990s Addition/Exterior Window Sill Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413248A ***Lab Sample ID:*** **042309385-0551**

Sample Description: 1990s Addition/Exterior Wall - Window/Door/Exp/Vent Caulk - Beige

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413248B ***Lab Sample ID:*** **042309385-0552**

Sample Description: 1990s Addition/Exterior Wall - Window/Door/Exp/Vent Caulk - Beige

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	0.0%	100.0%	None Detected	

Client Sample ID: 0413249A ***Lab Sample ID:*** **042309385-0553**

Sample Description: 1957 Addition/Foundation Tar Damp-Proofing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Black	10.0%	86.0%	**4% Chrysotile**	

Client Sample ID: 0413249B ***Lab Sample ID:*** **042309385-0554**

Sample Description: 1957 Addition/Foundation Tar Damp-Proofing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413250A ***Lab Sample ID:*** **042309385-0555**

Sample Description: 1957 Addition/Ext. Wall/Paint - Lower Floor

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413250B ***Lab Sample ID:*** **042309385-0556**

Sample Description: 1957 Addition/Ext. Wall/Paint - Lower Floor

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413250C ***Lab Sample ID:*** **042309385-0557**

Sample Description: 1957 Addition/Ext. Wall/Paint - Lower Floor

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413251A ***Lab Sample ID:*** **042309385-0558**

Sample Description: 1957 Addition/Ext. Vent Caulk - Old

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Tan	0.0%	92.0%	**6% Anthophyllite**	
					2% Chrysotile	

Client Sample ID: 0413251B ***Lab Sample ID:*** **042309385-0559**

Sample Description: 1957 Addition/Ext. Vent Caulk - Old

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023				Positive Stop (Not Analyzed)	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413252A ***Lab Sample ID:*** **042309385-0560**
Sample Description: 1957 Addition/Ext. Door Caulk - Newer

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Tan	3.0%	97.0%	None Detected	

Client Sample ID: 0413252B ***Lab Sample ID:*** **042309385-0561**
Sample Description: 1957 Addition/Ext. Door Caulk - Newer

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Tan	7.0%	93.0%	None Detected	

Client Sample ID: 0413253A ***Lab Sample ID:*** **042309385-0562**
Sample Description: 1957 Addition/Ext. Window Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	6.0%	90.0%	**4% Chrysotile**	

Client Sample ID: 0413253B ***Lab Sample ID:*** **042309385-0563**
Sample Description: 1957 Addition/Ext. Window Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413254A ***Lab Sample ID:*** **042309385-0564**
Sample Description: 1950 Addition/Ext. Glass Block Window Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Tan	3.0%	92.0%	**5% Chrysotile**	

Client Sample ID: 0413254B ***Lab Sample ID:*** **042309385-0565**
Sample Description: 1950 Addition/Ext. Glass Block Window Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413255A ***Lab Sample ID:*** **042309385-0566**
Sample Description: 1950 Addition/Ext. Window Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan	3.0%	93.0%	**4% Chrysotile**	

Client Sample ID: 0413255B ***Lab Sample ID:*** **042309385-0567**
Sample Description: 1950 Addition/Ext. Window Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023				Positive Stop (Not Analyzed)	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413256A ***Lab Sample ID:*** **042309385-0568**
Sample Description: 1950 Addition/Ext. Door Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Tan	0.0%	92.0%	**8% Chrysotile**	

Client Sample ID: 0413256B ***Lab Sample ID:*** **042309385-0569**
Sample Description: 1950 Addition/Ext. Door Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413257A ***Lab Sample ID:*** **042309385-0570**
Sample Description: 1950 Addition/Ext. Door Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Tan	0.0%	96.0%	**4% Chrysotile**	

Client Sample ID: 0413257B ***Lab Sample ID:*** **042309385-0571**
Sample Description: 1950 Addition/Ext. Door Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413258A ***Lab Sample ID:*** **042309385-0572**
Sample Description: 1950 Addition/Ext. Wall Expansion Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray/Tan	3.0%	93.0%	**4% Chrysotile**	

Client Sample ID: 0413258B ***Lab Sample ID:*** **042309385-0573**
Sample Description: 1950 Addition/Ext. Wall Expansion Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413259A ***Lab Sample ID:*** **042309385-0574**
Sample Description: 1950 Addition - Boiler Room/Ext. Vent Caulk - Newer

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray/Tan	3.0%	97.0%	None Detected	

Client Sample ID: 0413259B ***Lab Sample ID:*** **042309385-0575**
Sample Description: 1950 Addition - Boiler Room/Ext. Vent Caulk - Newer

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray/Tan	2.0%	98.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413260A ***Lab Sample ID:*** **042309385-0576**
Sample Description: 1950 Addition/Ext. Vent Caulk - Older

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Tan	0.0%	96.0%	**4% Chrysotile**	

Client Sample ID: 0413260B ***Lab Sample ID:*** **042309385-0577**
Sample Description: 1950 Addition/Ext. Vent Caulk - Older

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413261A ***Lab Sample ID:*** **042309385-0578**
Sample Description: 1950 Addition/Ext. Vent Caulk - Older

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray/Black	0.0%	96.0%	**4% Chrysotile**	

Client Sample ID: 0413261B ***Lab Sample ID:*** **042309385-0579**
Sample Description: 1950 Addition/Ext. Vent Caulk - Older

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413262A ***Lab Sample ID:*** **042309385-0580**
Sample Description: 1950 Addition - Front Building/Ext. Wall/Paint - Front

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray/Tan	2.0%	98.0%	None Detected	

Client Sample ID: 0413262B ***Lab Sample ID:*** **042309385-0581**
Sample Description: 1950 Addition - Front Building/Ext. Wall/Paint - Front

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray/Tan	3.0%	97.0%	None Detected	

Client Sample ID: 0413262C ***Lab Sample ID:*** **042309385-0582**
Sample Description: 1950 Addition - Front Building/Ext. Wall/Paint - Front

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray/Tan	2.0%	98.0%	None Detected	

Client Sample ID: 0413263A ***Lab Sample ID:*** **042309385-0583**
Sample Description: 1902 Orginal Bldg./Ext. Window Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Tan	5.0%	91.0%	**4% Chrysotile**	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413263B ***Lab Sample ID:*** **042309385-0584**
Sample Description: 1902 Orginal Bldg./Ext. Window Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413264A ***Lab Sample ID:*** **042309385-0585**
Sample Description: 1902 Orginal Bldg./Ext. Door Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Tan/White	4.0%	93.0%	**3% Chrysotile**	

Client Sample ID: 0413264B ***Lab Sample ID:*** **042309385-0586**
Sample Description: 1902 Orginal Bldg./Ext. Door Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413265A ***Lab Sample ID:*** **042309385-0587**
Sample Description: 1902 Orginal Bldg./Ext. Door Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray	3.0%	92.0%	**5% Chrysotile**	

Client Sample ID: 0413265B ***Lab Sample ID:*** **042309385-0588**
Sample Description: 1902 Orginal Bldg./Ext. Door Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413266A ***Lab Sample ID:*** **042309385-0589**
Sample Description: 1902 Orginal Bldg. - Main Entry/Front Door and Window Caulk and Glaze

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Brown/Tan	0.0%	95.0%	**5% Chrysotile**	

Client Sample ID: 0413266B ***Lab Sample ID:*** **042309385-0590**
Sample Description: 1902 Orginal Bldg. - Main Entry/Front Door and Window Caulk and Glaze

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413267A ***Lab Sample ID:*** **042309385-0591**
Sample Description: 1957 Roof/Copper Flashing Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413267B ***Lab Sample ID:*** **042309385-0592**

Sample Description: 1957 Roof/Copper Flashing Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray/Tan	0.0%	100.0%	**<1% Chrysotile**	
400 PLM Pt Ct	4/27/2023	Gray/Tan	0.00%	99.25%	**0.75% Chrysotile**	Point Count performed on NOB material without gravimetric reduction at client request. Asbestos results may be under-reported.

Client Sample ID: 0413268A ***Lab Sample ID:*** **042309385-0593**

Sample Description: 1990s Roof/Copper Flashing Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413268B ***Lab Sample ID:*** **042309385-0594**

Sample Description: 1950 Roof/Copper Flashing Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray	4.0%	96.0%	None Detected	

Client Sample ID: 0413269A ***Lab Sample ID:*** **042309385-0595**

Sample Description: 1950 Roof/Perimeter Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray/Black	3.0%	97.0%	None Detected	

Client Sample ID: 0413269B ***Lab Sample ID:*** **042309385-0596**

Sample Description: 1990's Roof/Perimeter Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Tan/Black	3.0%	97.0%	None Detected	

Client Sample ID: 0413270A ***Lab Sample ID:*** **042309385-0597**

Sample Description: 1990's Roof/Building EXP Caulk and HVAC Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413270B ***Lab Sample ID:*** **042309385-0598**

Sample Description: 1950 Roof/Building EXP Caulk and HVAC Caulk

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413271A ***Lab Sample ID:*** **042309385-0599**

Sample Description: 1990's Roof/Top Layer - Roof Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	10.0%	90.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413271B ***Lab Sample ID:*** **042309385-0600**
Sample Description: 1990's Roof/Top Layer - Roof Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	12.0%	88.0%	None Detected	

Client Sample ID: 0413272A ***Lab Sample ID:*** **042309385-0601**
Sample Description: 1990's Roof/Bottom Layer - Roof Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	6.0%	94.0%	None Detected	

Client Sample ID: 0413272B ***Lab Sample ID:*** **042309385-0602**
Sample Description: 1990's Roof/Bottom Layer - Roof Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	5.0%	95.0%	None Detected	

Client Sample ID: 0413273A ***Lab Sample ID:*** **042309385-0603**
Sample Description: 1990's Roof/Black Paper under Shingles

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	10.0%	90.0%	None Detected	

Client Sample ID: 0413273B ***Lab Sample ID:*** **042309385-0604**
Sample Description: 1990's Roof/Black Paper under Shingles

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	10.0%	90.0%	None Detected	

Client Sample ID: 0413274A ***Lab Sample ID:*** **042309385-0605**
Sample Description: 1990's Roof/Perimeter Flashing Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413274B ***Lab Sample ID:*** **042309385-0606**
Sample Description: 1990's Roof/Perimeter Flashing Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413275A ***Lab Sample ID:*** **042309385-0607**
Sample Description: 1990's Roof/Perimeter Flashing Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413275B ***Lab Sample ID:*** **042309385-0608**
Sample Description: 1990's Roof/Perimeter Flashing Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413276A ***Lab Sample ID:*** **042309385-0609**
Sample Description: 1990's Roof/HVAC Tar (Under Caulk)

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413276B ***Lab Sample ID:*** **042309385-0610**
Sample Description: 1990's Roof/HVAC Tar (Under Caulk)

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413277A ***Lab Sample ID:*** **042309385-0611**
Sample Description: 1990's Roof/Copper Flash Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	0.0%	94.0%	**6% Chrysotile**	

Client Sample ID: 0413277B ***Lab Sample ID:*** **042309385-0612**
Sample Description: 1990's Roof/Copper Flash Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413278A ***Lab Sample ID:*** **042309385-0613**
Sample Description: 1990's Roof/Tar Patach Copper Flash Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	15.0%	85.0%	None Detected	

Client Sample ID: 0413278B ***Lab Sample ID:*** **042309385-0614**
Sample Description: 1990's Roof/Tar Patach Copper Flash Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	15.0%	85.0%	None Detected	

Client Sample ID: 0413279A ***Lab Sample ID:*** **042309385-0615**
Sample Description: 1990's Roof/Rolled Roof

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	5.0%	95.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413279B ***Lab Sample ID:*** **042309385-0616**
Sample Description: 1990's Roof/Rolled Roof

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	8.0%	92.0%	None Detected	

Client Sample ID: 0413280A ***Lab Sample ID:*** **042309385-0617**
Sample Description: 1990's Roof/Soft Concrete

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413280B ***Lab Sample ID:*** **042309385-0618**
Sample Description: 1990's Roof/Soft Concrete

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	White	0.0%	100.0%	None Detected	

Client Sample ID: 0413281A ***Lab Sample ID:*** **042309385-0619**
Sample Description: 1990's Roof/Foamboard Paper Layer

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Gray	95.0%	5.0%	None Detected	

Client Sample ID: 0413281B ***Lab Sample ID:*** **042309385-0620**
Sample Description: 1990's Roof/Foamboard Paper Layer

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Gray	95.0%	5.0%	None Detected	

Client Sample ID: 0413282A ***Lab Sample ID:*** **042309385-0621**
Sample Description: 1990's Roof/Soft Concrete Deck

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	16.0%	84.0%	None Detected	

Client Sample ID: 0413282B ***Lab Sample ID:*** **042309385-0622**
Sample Description: 1990's Roof/Soft Concrete Deck

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	18.0%	82.0%	None Detected	

Client Sample ID: 0413283 ***Lab Sample ID:*** **042309385-0623**
Sample Description: 1957 Roof/Rolled Roof

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/White/Black	19.0%	81.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413284 ***Lab Sample ID:*** **042309385-0624**
Sample Description: 1957 Roof/Soft Concrete

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	White	18.0%	82.0%	None Detected	

Client Sample ID: 0413285 ***Lab Sample ID:*** **042309385-0625**
Sample Description: 1957 Roof/Foam Board Paper

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Gray	97.0%	3.0%	None Detected	

Client Sample ID: 0413286A ***Lab Sample ID:*** **042309385-0626**
Sample Description: 1957 Roof/Bottom - Layer Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/White/Black	17.0%	83.0%	None Detected	

Client Sample ID: 0413286B ***Lab Sample ID:*** **042309385-0627**
Sample Description: 1957 Roof/Bottom - Layer Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/White/Black	15.0%	85.0%	None Detected	

Client Sample ID: 0413287 ***Lab Sample ID:*** **042309385-0628**
Sample Description: 1957 Roof/Perimeter Flashing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Gray/Various/Black	18.0%	82.0%	None Detected	

Client Sample ID: 0413288 ***Lab Sample ID:*** **042309385-0629**
Sample Description: 1957 Roof/Soft Concrete

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/White	10.0%	90.0%	None Detected	

Client Sample ID: 0413289A ***Lab Sample ID:*** **042309385-0630**
Sample Description: 1957 Roof/Perimeter Wall Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Black	15.0%	85.0%	None Detected	

Client Sample ID: 0413289B ***Lab Sample ID:*** **042309385-0631**
Sample Description: 1957 Roof/Perimeter Wall Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Brown/Black	13.0%	87.0%	None Detected	

EMSL Analytical, Inc.
200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413290A ***Lab Sample ID:*** **042309385-0632**
Sample Description: 1957 Roof/Perimeter Wall Tar Paper

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/Black	12.0%	88.0%	None Detected	

Client Sample ID: 0413290B ***Lab Sample ID:*** **042309385-0633**
Sample Description: 1957 Roof/Perimeter Wall Tar Paper

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/26/2023	Tan/Black	10.0%	90.0%	None Detected	

Client Sample ID: 0413291A ***Lab Sample ID:*** **042309385-0634**
Sample Description: 1957 Roof/Tar on Brick Perimeter Wall

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray/Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413291B ***Lab Sample ID:*** **042309385-0635**
Sample Description: 1957 Roof/Tar on Brick Perimeter Wall

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray/Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413292A ***Lab Sample ID:*** **042309385-0636**
Sample Description: 1957 Roof/Chimney Roof Flashing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	0.0%	92.0%	**8% Chrysotile**	

Client Sample ID: 0413292B ***Lab Sample ID:*** **042309385-0637**
Sample Description: 1957 Roof/Chimney Roof Flashing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413293A ***Lab Sample ID:*** **042309385-0638**
Sample Description: 1950 Roof - Roof 3/Top Layer - Roof Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	5.0%	95.0%	None Detected	

Client Sample ID: 0413293B ***Lab Sample ID:*** **042309385-0639**
Sample Description: 1950 Roof - Roof 5/Top Layer - Roof Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	8.0%	92.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413293C ***Lab Sample ID:*** **042309385-0640**
Sample Description: 1950 Roof - Roof 6/Top Layer - Roof Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	10.0%	90.0%	None Detected	

Client Sample ID: 0413293D ***Lab Sample ID:*** **042309385-0641**
Sample Description: 1950 Roof - Roof 7/Top Layer - Roof Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	8.0%	92.0%	None Detected	

Client Sample ID: 0413294A ***Lab Sample ID:*** **042309385-0642**
Sample Description: 1950 Roof - Roof 3/2nd Layer - Roof Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	6.0%	94.0%	None Detected	

Client Sample ID: 0413294B ***Lab Sample ID:*** **042309385-0643**
Sample Description: 1950 Roof - Roof 5/2nd Layer - Roof Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	8.0%	92.0%	None Detected	

Client Sample ID: 0413294C ***Lab Sample ID:*** **042309385-0644**
Sample Description: 1950 Roof - Roof 6/2nd Layer - Roof Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	4.0%	96.0%	None Detected	

Client Sample ID: 0413294D ***Lab Sample ID:*** **042309385-0645**
Sample Description: 1950 Roof - Roof 7/2nd Layer - Roof Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	8.0%	92.0%	None Detected	

Client Sample ID: 0413295A ***Lab Sample ID:*** **042309385-0646**
Sample Description: 1950 Roof - Roof 3/3rd Layer - Roof Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413295B ***Lab Sample ID:*** **042309385-0647**
Sample Description: 1950 Roof - Roof 3/3rd Layer - Roof Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413296A ***Lab Sample ID:*** **042309385-0648**
Sample Description: 1950 Roof - Roof 3/Black Paper under Shingles

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	2.0%	98.0%	None Detected	

Client Sample ID: 0413296B ***Lab Sample ID:*** **042309385-0649**
Sample Description: 1950 Roof - Roof 5/Black Paper under Shingles

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	6.0%	94.0%	None Detected	

Client Sample ID: 0413296C ***Lab Sample ID:*** **042309385-0650**
Sample Description: 1950 Roof - Roof 6/Black Paper under Shingles

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	5.0%	95.0%	None Detected	

Client Sample ID: 0413296D ***Lab Sample ID:*** **042309385-0651**
Sample Description: 1950 Roof - Roof 7/Black Paper under Shingles

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	5.0%	95.0%	None Detected	

Client Sample ID: 0413297A ***Lab Sample ID:*** **042309385-0652**
Sample Description: 1950 Roof - Roof 3/Concrete Roof Deck

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413297B ***Lab Sample ID:*** **042309385-0653**
Sample Description: 1950 Roof - Roof 5/Concrete Roof Deck

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413297C ***Lab Sample ID:*** **042309385-0654**
Sample Description: 1950 Roof - Roof 6/Concrete Roof Deck

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413298A ***Lab Sample ID:*** **042309385-0655**
Sample Description: 1950 Roof - Roof 5/Copper Flashing Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	0.0%	96.0%	**4% Chrysotile**	

EMSL Analytical, Inc.
200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413298B ***Lab Sample ID:*** **042309385-0656**
Sample Description: 1950 Roof - Roof 5/Copper Flashing Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413299A ***Lab Sample ID:*** **042309385-0657**
Sample Description: 1950 Roof - Roof 3/Gutter Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413299B ***Lab Sample ID:*** **042309385-0658**
Sample Description: 1950 Roof - Roof 3/Gutter Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413300A ***Lab Sample ID:*** **042309385-0659**
Sample Description: 1950 Roof - Roof 3/Gutter Seam Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	0.0%	95.0%	**5% Chrysotile**	

Client Sample ID: 0413300B ***Lab Sample ID:*** **042309385-0660**
Sample Description: 1950 Roof - Roof 3/Gutter Seam Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023				Positive Stop (Not Analyzed)	

Client Sample ID: 0413301A ***Lab Sample ID:*** **042309385-0661**
Sample Description: 1902 Roof - Roof 9/Top Layer - Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	2.0%	98.0%	None Detected	

Client Sample ID: 0413301B ***Lab Sample ID:*** **042309385-0662**
Sample Description: 1902 Roof - Roof 9/Top Layer - Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	2.0%	98.0%	None Detected	

Client Sample ID: 0413302A ***Lab Sample ID:*** **042309385-0663**
Sample Description: 1902 Roof - Roof 9/2nd Layer - Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	3.0%	97.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413302B ***Lab Sample ID:*** **042309385-0664**
Sample Description: 1902 Roof - Roof 9/2nd Layer - Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	3.0%	97.0%	None Detected	

Client Sample ID: 0413303A ***Lab Sample ID:*** **042309385-0665**
Sample Description: 1902 Roof - Roof 9/3rd Layer - Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	2.0%	98.0%	None Detected	

Client Sample ID: 0413303B ***Lab Sample ID:*** **042309385-0666**
Sample Description: 1902 Roof - Roof 9/3rd Layer - Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	2.0%	98.0%	None Detected	

Client Sample ID: 0413304A ***Lab Sample ID:*** **042309385-0667**
Sample Description: 1902 Roof - Roof 9/Black Paper under Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	2.0%	98.0%	None Detected	

Client Sample ID: 0413304B ***Lab Sample ID:*** **042309385-0668**
Sample Description: 1902 Roof - Roof 9/Black Paper under Shingle

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	3.0%	97.0%	None Detected	

Client Sample ID: 0413305A ***Lab Sample ID:*** **042309385-0669**
Sample Description: 1950's Roof - Roof 1/Top Layer - Roll Roof

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	2.0%	98.0%	None Detected	

Client Sample ID: 0413305B ***Lab Sample ID:*** **042309385-0670**
Sample Description: 1950's Roof - Roof 2/Top Layer - Roll Roof

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	2.0%	98.0%	None Detected	

Client Sample ID: 0413306A ***Lab Sample ID:*** **042309385-0671**
Sample Description: 1950's Roof - Roof 1/Soft Concrete

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray	0.0%	100.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413306B ***Lab Sample ID:*** **042309385-0672**
Sample Description: 1950's Roof - Roof 2/Soft Concrete

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray	0.0%	100.0%	None Detected	

Client Sample ID: 0413307A ***Lab Sample ID:*** **042309385-0673**
Sample Description: 1950 Roof - Roof 1/Field - Paper Layers

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray	83.0%	17.0%	None Detected	

Client Sample ID: 0413307B ***Lab Sample ID:*** **042309385-0674**
Sample Description: 1950 Roof - Roof 2/Field - Paper Layers

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray	89.0%	11.0%	None Detected	

Client Sample ID: 0413308A ***Lab Sample ID:*** **042309385-0675**
Sample Description: 1950 Roof - Roof 1/Field - Bottom Layer Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	<1%	100.0%	None Detected	

Client Sample ID: 0413308B ***Lab Sample ID:*** **042309385-0676**
Sample Description: 1950 Roof - Roof 2/Field - Bottom Layer Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	<1%	100.0%	None Detected	

Client Sample ID: 0413309A ***Lab Sample ID:*** **042309385-0677**
Sample Description: 1950 Roof - Roof 2/Tar on Deck

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Silver	0.0%	100.0%	None Detected	

Client Sample ID: 0413309B ***Lab Sample ID:*** **042309385-0678**
Sample Description: 1950 Roof - Roof 2/Tar on Deck

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Silver	0.0%	100.0%	None Detected	

Client Sample ID: 0413310A ***Lab Sample ID:*** **042309385-0679**
Sample Description: 1950 Roof - Roof 1/Penetration Flashing - Top Layer

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	2.0%	98.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413310B ***Lab Sample ID:*** **042309385-0680**

Sample Description: 1950 Roof - Roof 1/Penetration Flashing - Top Layer

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	2.0%	98.0%	None Detected	

Client Sample ID: 0413311A ***Lab Sample ID:*** **042309385-0681**

Sample Description: 1950 Roof - Roof 1/Penetration Flashing - 2nd Layer

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	8.0%	92.0%	None Detected	

Client Sample ID: 0413311B ***Lab Sample ID:*** **042309385-0682**

Sample Description: 1950 Roof - Roof 1/Penetration Flashing - 2nd Layer

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	9.0%	91.0%	None Detected	

Client Sample ID: 0413312A ***Lab Sample ID:*** **042309385-0683**

Sample Description: 1950 Roof - Roof 1/Penetration Flashing - Bottom on Concrete

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray/Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413312B ***Lab Sample ID:*** **042309385-0684**

Sample Description: 1950 Roof - Roof 1/Penetration Flashing - Bottom on Concrete

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Gray/Black	8.0%	92.0%	None Detected	

Client Sample ID: 0413313A ***Lab Sample ID:*** **042309385-0685**

Sample Description: 1950 Roof - Roof 1/Perimeter Flashing - Top Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	8.0%	92.0%	None Detected	

Client Sample ID: 0413313B ***Lab Sample ID:*** **042309385-0686**

Sample Description: 1950 Roof - Roof 2/Perimeter Flashing - Top Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Tan/Red/Black	8.0%	92.0%	None Detected	

Client Sample ID: 0413314A ***Lab Sample ID:*** **042309385-0687**

Sample Description: 1950 Roof - Roof 1/Perimeter Flashing - Bottom Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	7.0%	93.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413314B ***Lab Sample ID:*** **042309385-0688**

Sample Description: 1950 Roof - Roof 1/Perimeter Flashing - Bottom Tar

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	8.0%	92.0%	None Detected	

Client Sample ID: 0413315A ***Lab Sample ID:*** **042309385-0689**

Sample Description: 1950 Roof - Roof 1/Perimeter Flashing - Tar on Metal

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	48.0%	52.0%	None Detected	

Client Sample ID: 0413315B ***Lab Sample ID:*** **042309385-0690**

Sample Description: 1950 Roof - Roof 1/Perimeter Flashing - Trim and Wood Deck

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	0.0%	100.0%	None Detected	

Client Sample ID: 0413316A ***Lab Sample ID:*** **042309385-0691**

Sample Description: 1950 Roof - Roof 1/Perimeter Wall at Gym - Top Tar Flashing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	14.0%	86.0%	None Detected	

Client Sample ID: 0413316B ***Lab Sample ID:*** **042309385-0692**

Sample Description: 1950 Roof - Roof 2/Perimeter Wall at Gym - Top Tar Flashig

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	13.0%	87.0%	None Detected	

Client Sample ID: 0413317A ***Lab Sample ID:*** **042309385-0693**

Sample Description: 1950 Roof - Roof 1/Perimeter Wall at Gym - 2nd Layer Tar Flashing

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	16.0%	84.0%	None Detected	

Client Sample ID: 0413317B ***Lab Sample ID:*** **042309385-0694**

Sample Description: 1950 Roof - Roof 2/Perimeter Wall at Gym - 2nd Layer Tar Flashig

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Red/Black	9.0%	91.0%	None Detected	

Client Sample ID: 0413318A ***Lab Sample ID:*** **042309385-0695**

Sample Description: 1950 Roof - Roof 2/Roofing Wall Mats

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	8.0%	92.0%	None Detected	

EMSL Analytical, Inc.

200 Route 130 North Cinnaminson, NJ 08077
Phone/Fax: (800) 220-3675 / (856) 786-5974
http://www.EMSL.com / cinnasblab@EMSL.com

EMSL Order ID: 042309385
Customer ID: LANG78
Customer PO:
Project ID:

Summary Test Report for Asbestos Analysis of Bulk Material

Client Sample ID: 0413318B ***Lab Sample ID:*** **042309385-0696**

Sample Description: 1950 Roof - Roof 2/Roofing Wall Mats

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Red/Black	8.0%	92.0%	None Detected	

Client Sample ID: 0413319A ***Lab Sample ID:*** **042309385-0697**

Sample Description: 1950 Roof - Roof 2/Roofing Field/Flash

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	45.0%	55.0%	None Detected	

Client Sample ID: 0413319B ***Lab Sample ID:*** **042309385-0698**

Sample Description: 1950 Roof - Roof 2/Roofing Field/Flash

TEST	Analyzed Date	Color	Non-Asbestos Fibrous	Non-Asbestos Non-Fibrous	Asbestos	Comment
PLM	4/27/2023	Black	36.0%	64.0%	None Detected	

Analyst(s):

April Schmuck	PLM (26)
Erick Rosa	PLM (134)
Jimmy Encalada	PLM (133) 400 PLM Pt Ct (3)
Luisa Vargas	TEM Grav. Reduction (9)
Rosemary Ortega	TEM Grav. Reduction (1)
Sawyer Fries	PLM (177)
Steve Jusczuk	PLM (173) 400 PLM Pt Ct (2)
Tomas Montes De Oca	PLM (15)

Reviewed and approved by:

Samantha Rundstrom, Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This is a summary report; official reports are available on LabConnect or upon request and relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government.
Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis.
Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Carle Place, NY NVLAP Lab Code 101048-10, CA ELAP 2339

Report amended: 05/10/202316:43:00 Replaces amended report from: 05/02/202313:09:00 Reason Code: Client-Additional Analysis

EMSL ANALYTICAL, INC.
LABORATORY · PRODUCTS · TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (Lab Use Only): 042309385

EMSL-Bill to: ☐ Same ☒ Different
If Bill to is Different note instructions in Comments**
Langan_InvoiceCapture@ConcurSolutions.com
Third Party Billing requires written authorization from third party

Company: Langan CT			
Street: 555 Long Wharf Drive			
City: New Haven	**State/Province:** CT	**Zip/Postal Code:** 06511	**Country:** USA
Report To (Name): Matthew Myers		**Telephone #:** 203.562.5771	
Email Address: MMyers@Langan.com		**Fax #:** 203.789.6142	**Purchase Order:**
Project Name/Number: 140265802		**Please Provide Results:** ☐ Fax ☒ Email Public School	
U.S. State Samples Taken: CT		**CT Samples:** ☐ Commercial/Taxable ☒ Residential/Tax Exempt	

Turnaround Time (TAT) Options* – Please Check

☐ 3 Hour ☐ 6 Hour ☐ 24 Hour ☐ 48 Hour ☐ 72 Hour ☐ 96 Hour ☒ 1 Week ☐ 2 Week

*For TEM Air 3 hr through 6 hr, please call ahead to schedule.*There is a premium charge for 3 Hour TEM AHERA or EPA Level II TAT. You will be asked to sign an authorization form for this service. Analysis completed in accordance with EMSL's Terms and Conditions located in the Analytical Price Guide.

PLM - Bulk (reporting limit)

- ☒ PLM EPA 600/R-93/116 (<1%)
- ☐ PLM EPA NOB (<1%)
- Point Count ☒ 400 (<0.25%) ☐ 1000 (<0.1%) If <3%
- Point Count w/Gravimetric ☐ 400 (<0.25%) ☐ 1000 (<0.1%)
- ☐ NIOSH 9002 (<1%)
- ☐ NY ELAP Method 198.1 (friable in NY)
- ☐ NY ELAP Method 198.6 NOB (non-friable-NY)
- ☐ OSHA ID-191 Modified
- ☐ Standard Addition Method

TEM – Bulk

- ☐ TEM EPA NOB – EPA 600/R-93/116 Section 2.5.5.1
- ☐ NY ELAP Method 198.4 (TEM)
- ☐ Chatfield Protocol (semi-quantitative)
- ☐ TEM % by Mass – EPA 600/R-93/116 Section 2.5.5.2
- ☐ TEM Qualitative via Filtration Prep Technique
- ☐ TEM Qualitative via Drop Mount Prep Technique

Other

- ☐ Old Greenwich School

☒ **Check For Positive Stop – Clearly Identify Homogenous Group** **Date Sampled:** 4/10 - 4/13/23

Samplers Name: Willie Thompson, Matt Myers **Samplers Signature:** [signature]

Sample #	HA #	Sample Location	Material Description
04B01A		1990's Addition Classroom 115	Black Sink Undercoating
B		↓ ↓	↓
02A		↓ ↓	Gray Sink Undercoating
B		↓ 114	↓
03A		↓ 115 Closet	Kiln
B		↓	↓
04A		↓	Kiln Roping
B		↓	↓
05A		↓ 115	Sink Caulking
B		↓ ↓	↓

Client Sample # (s): **Total # of Samples:** 697

Relinquished (Client): [signature] **Date:** 4/17/23 **Time:**

Received (Lab): [signature] **Date:** 4-19-23 **Time:** 9:40 am

Comments/Special Instructions:

Controlled Document – Asbestos COC – R6 – 11/29/2012

(699) MS

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:40

Sample #	HA #	Sample Location	Material Description
041306A		1990's Addition Classroom 115	Window Sill Caulking
B		↓	↓
07A		Cafe/Corridor	Interior Door Window Glazing Black gooey
B		Kitchen Exit Door	↓
08A		Kitchen	HVAC Duct Seam Sealant
B		↓	↓
09A		↓	2x4 Ceiling Tile
B		↓	↓
10A		Classrooms/Corridor/Cafe	↓
B		↓	↓
11A		Classroom 115	Gypsum Board
B		↓ 114	↓
12A		↓ 115	↓ Joint/Taping Compound
B		↓ 114	↓ ↓
C		Kitchen	
13A		Kitchen	Sheet Flooring
B		↓	↓
14A			Adhesive Tan Brown
B			↓ ↓
15A			Grey Cement Substrate
B			↓
16A		Cafe	12x12 Pink Floor Tile
B		↓	↓
17A		↓	12x12 White Floor Tile
B		classroom 115 Closet	↓

*Comments/Special Instructions:

Controlled Document – Asbestos COC – R6 – 11/29/2012

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:40

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041358A		1990's Addition Classroom 114	12x12 Blue Floor Tile
B		Cafe	↓
C		Kitchen Storage	↓
19A		Classroom 114	↓ yellow mastic
B		Cafe	↓ ↓
C		Kitchen Storage	↓ ↓
20A		Classroom 115	Floor Tile Leveler
B		114	↓
21A		Exit Door Entry	Rubber Sheet Flooring
B		↓	↓
22A		↓	↓ Yellow Adhesive
B		↓	↓ ↓
23A		Kitchen	Gray Floor Leveler ONLY
B		↓	↓
24A		Cafeteria	Dark Cove Base
B		Classroom 115	↓
25A		Cafeteria	↓ white Adhesive
B		Classroom 115	↓ ↓
26A		Classroom 115 Closet	Pink Cove Base
B		↓	↓
27A		↓	↓ Yellow Adhesive
B		↓	↓ ↓
28A		Kitchen Storage	white Cove Base
B		↓	↓

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:40

Sample #	HA #	Sample Location	Material Description
041329A		1990's Addition Kitchen Storage	White Cove Base Tan Adhesive
B		↓	↓
30A		Kitchen	Plastic Wall Adhesive
B		↓	↓
31A		Cafeteria/Corridor	Wall/Bulletin Board Adhesive
B		↓	↓
32A		Corridor	Fabric/Cover
B		Classroom 114	↓
33A		Corridor	Gray Material
B		Classroom 114	↓
34A		Corridor	Brown Material
B		↓	↓
35A		Cafeteria/Corridor	Toilet Rooms Ceramic Wall Tile Hand Gray Mud Mortar ONLY
B		↓	↓
36A		Toilet Rooms	Ceramic Floor Tile Mud Bed
B			↓ ↓
37A			Grout
B			↓ ↓
38A			Ceramic Wall Tile Grout
B			↓
39A		1957 Addition Classroom 37	White Sink Undercoating
B		24	↓
40A		6	Gray Sink Undercoating
B		6	↓

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:40

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041341A		1957 Addition Classroom 37	Interior Window Glazing Above Door (PCB)
B		↓	↓
42A		37	2x2 Ceiling Tile
B		24	↓
43A		↓ 24	Gypsum Board
B		6	↓
44A		24	Joint/Taping Compound
B		6	↓
C		↓	↓
45A		Classroom 37	Wall Plaster Finish White Coat
B		↓ ↓	↓
C		↓	↓
D		24	↓
E		↓	↓
F		6	↓
G		↓	↓
46A		Classroom 37	Gray Rough Coat
B		↓	↓
C		↓	↓
D		24	↓
E		↓	↓
F		6	↓
G		↓	↓
47A		↓ 24	Black Paper on Concrete Deck
B		↓	↓

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

RECEIVED EMSL CINNAMINSON NJ 2023 APR 19 P 3:40

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
0413 48A		1957 Addition Classroom 37	Black Damproofing Perimeter Wall
B		↓	↓
49A		37	12x12 Light Blue Floor Tile
B		24	↓
50A		6	12x12 Blue Floor Tile
B		↓	↓
51A		37	↓ Black Mastic
B		↓ 6	↓ ↓
52A		↓ 37	Formica Countertop Adhesive
B		↓ ↓	↓
53A		6	Cove Base
B		↓	↓
54A		↓	Adhesive White/Tan
B		↓ ↓	↓ ↓
55A		Classroom 37	Bulletin Board Top Layer
B		↓	↓
56A		↓	↓ Adhesive Light Brown
B		↓	↓ ↓
57A		↓	Second Layer
B		↓	↓
58A		↓	↓ Adhesive Brown
B		↓	↓ ↓
59A		Classroom 6	↓ Adhesive Gray
B		↓	↓ ↓

Neg Item Bkg Atmos PLM

***Comments/Special Instructions:**

Page 6 of 29 pages

Controlled Document – Asbestos COC – R6 – 11/29/2012

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:40

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041360A		1950 Addition Classroom 42 (41 also)	White Sink undercoating
B		2	⊥
61A		1 toilet	Light Grey Sink undercoating
B		1 ⊥	⊥ ⊥
62A		4	Dark Grey
B		4	⊥ ⊥
63A		Mech Rm Above 29 media	Duct Pan Adhesive Brown
B		⊥	⊥
64A			Duct Insulation Residue white
B			⊥
C		⊥	
65A		Outside Storage Room (bldg 3)	Duct Insulation Grey
B			⊥
C		⊥	
66A		Mech Rm Above 29 media in Breathe place	Pipe End Cap Insulation
B		⊥	⊥
C			
67A		Attic (41 area)	Mineral Wool Loose Insulation
B		Mech Rm Above 29 media	⊥
C		⊥	
68A		Boiler Room	Spray Applied Fireproofing
B			
C			
D			
E		⊥ ⊥	⊥

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED
EMSL
CINNAMINSON, NJ
2023 APR 19 P 3:40

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041369A		1950 Mediterr Locker Rm	Reel Fire Stop Caulking never
B		↓	↓
70A		Mech Rm Above 29 mechanical	Duct Seam Caulking never
B		↓	↓
71A		Classroom 41	Interior Door Window Glazing Black PCB
B		↓ 42	↓ ↓
72A		Room 29 media	↓ ↓
B		↓	↓
73A		Stairwell by 41 & 29	Interior Glass Block Window Grout
B		↓	↓ ↓
74A		↓	Interior Window Caulk old Thick Hard PCB
B		↓	↓
75A		Gymnasium	Interior Window Caulk never white
B		↓	↓
76A		↓	↓ older black Thick PCB
B		↓	↓ ↓
77A		Stair/hall by 12	Interior Door Caulk hard Thin white PCB
B		Gym Foyer Lobby ↓ Corridor	↓ ↓
78A		Gym Foyer ~~Corridor~~	Interior Door/Window Perimeter Caulk
B		↓	↓ ↓
79A		Classroom 3/4 Corridor	Interior Door Caulk white never
B		↓ ↓	↓ ↓
80A		↓ ↓	Interior Window Caulk Black sticky Age?
B		↓ ↓	↓ ↓

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:40

Sample #	HA #	Sample Location	Material Description
041381A		1950 Addition Classroom 3/4 Corridor	Interior Window Glaze Neon white
B		⊥	⊥
82A		Classroom 41	Blackboard Assume Glue
B		⊥ 42	⊥
83A		⊥ 41	Slate Window Sill Glue?
B		⊥ 42	⊥
84A		⊥ ⊥	Formica Counter Adhesive
B		⊥ ⊥	⊥
85A		⊥ 41	2x2 Ceiling Tiles Dark Brown Backing
B		Gym Foyer Lobby	⊥ ⊥
86A		Classroom 3	⊥ Light Tan Backing
B		⊥ 4	⊥
87A		Locker Toilet	Gypsum ceiling tile
B		Rm 1 Toilet	⊥
88A		Classroom 1	1x1 Ceiling tiles Large Hole
B			⊥ ⊥
89A			⊥ Small pin hole
B			⊥
90A			⊥ Smooth
B			⊥ ⊥
91A		Teacher Room/Lounge	⊥ Kitchenette
B		⊥	⊥ ⊥
92A		Classroom 1	1x1 ceiling tile Adhesive Yellow
B		⊥	⊥ ⊥

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

RECEIVED EMSL CINNAMINSON, NJ 2013 APR 19 P 3:49

Sample #	HA #	Sample Location	Material Description
041393A		1950 Addition Classroom 1	1x1 Ceiling tile Adhesive Dark Brown
B		↓	↓ ↓
94A		Classroom 41	Gypsum Board
B		Locker toilet	↓
C		Corridor (Rm 2)	
95A		Classroom 42 Closet	Taping/Joint compound
B		Locker toilet	↓ ↓
C		Corridor (Rm 2)	
96A		Corridor Closet by 42	One Coat Ceiling Plaster
B		Utility Rm by 10	↓
C		↓	
97A		Outside Storage Rm by 3	One Coat Wall Plaster (cement?)
B		↓	↓
C			
98A		Classroom 1	Ceiling Plaster Finish Coat white
B		↓	↓ ↓
C		Janitor Closet / Storage adjacent outside Rm	
99A		Classroom 1	Rough Coat tan/gray
B		↓	↓ ↓
C		Janitor Closet / Storage adjacent outside Rm	
100A		Classroom 1	Wall Plaster Finish Coat white
B		Janitor Closed	↓
C		↓	
101 A B		classroom 1 Janitor Closed	Rough Coat tan/gray

*Comments/Special Instructions:

Controlled Document – Asbestos COC – R6 – 11/29/2012

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

RECEIVED EMSL CINNAMINSON NJ 2023 APR 19 P 3:40

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description	
041310 2A		1958 Addition Gym Locker Rms	Ceiling Plaster	White Finish Coat
B		↓	↓	↓
C		↓	↓	↓
103A		↓	↓	Gray/Tan Rough Coat
B		↓	↓	↓
C		↓	↓	↓
104A		↓	Wall Plaster	White Finish Coat
B		↓	↓	↓
C		Gym Corridor	↓	↓
105A		Gym Locker Rms	↓	Gray/Tan Rough Coat
B		↓	↓	↓
C		Gym Corridor	↓	↓
106A		Media Center Data Rm	Wall Plaster	White Finish Coat
B		Corridor (41)	↓	↓
C		Classroom 41	↓	↓
107A		Media Center Data Room	↓	Gray/Tan Rough Coat
B		Corridor (41)	↓	↓
C		Classroom 42	↓	↓
108A		Media Center Data Rm	Ceiling Plaster	White Finish Coat
B		Stairwell (42)	↓	↓
C		↓	↓	↓
109A		Media Center Data Rm	↓	Gray/Tan Rough Coat
B		Stairwell (42)	↓	↓
C		↓	↓	↓

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

RECEIVED
EMSL
CINNAMINSON, NJ
2023 APR 19 P 3:40

Sample #	HA #	Sample Location	Material Description
04131104		1950 Addition Stage	Black Paper under wood Floor
B			⊥
111A		under stage	Black Tar on Block wall
B			⊥
112A			Black Paper on Block wall
B			⊥
113A		(ramp) Cust Closet bay 10	9x9 Floor tile
B			⊥
114A			Black mastic
B			⊥
115A		Custodial office	⊥
B		under shelving	
116A			Black Mastic
B			⊥
117A		Custodial office	12x12 Blue Floor tile
B		Classroom 4	⊥
C		⊥	(L)
118A		Custodial office	Black mastic
B		Classroom 4	⊥
119A		Gym office	12x12 white Floor tile
B			⊥
120A			Black mastic
B			⊥

NOB TEM if neg by PLM

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): RECEIVED EMSL CINNAMINSON NJ 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

2023 APR 19 P 3:40

Sample #	HA #	Sample Location	Material Description
041321A		1958 Addition Classroom 41/40	12X12 Green (Blue) Floor tile
B		↓	↓
122A		↓	↓ Black mastic
B		↓	↓ ↓
123A		Classroom 3/4/corridor	Cove Base
B		Classroom 4	↓
124A		Classroom 3/4/corridor	↓ Adhesive
B		Classroom 4	↓ ↓
125A		Classroom 42	Sink wall Gray material
B		↓	↓ ↓
126A		↓	↓ Black material behind gray
B		↓	↓ ↓
127A		↓	↓ Adhesive behind black
B		↓	↓ ↓
128A		Corridor 3/4 rooms	Wood Panel Wall Adhesive Yellow Brown
B		↓	↓ ↓
129A		Classroom 42 Closet	Cork Bull. Board Adhesive Dark Brown Thin
B		↓ 41 ↓	↓
130A		Same as 12 Classroom 42	Bulletin Board
B		↓ 41	↓
131A		↓ 42	↓ Adhesive Dark Brown
B		41	↓
132A		Classroom 12	Bull Board Adhesive Light Brown
B		↓	↓

Does TEM if negative by PLM

***Comments/Special Instructions:**

Page 13 of 29 pages

Controlled Document – Asbestos COC – R6 – 11/29/2012

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

RECEIVED EMSL CINNAMINSON, NJ 2003 APR 18 P 3:40

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041313 3A		1950's Addition Classroom 1	Grey Bulletin Board (on black)
B		Teachers Lounge	↓
134A		Corridor (41)	Terrazzo Floor
B		↓	↓
135A		↓	↓ Mud Bed
B			↓
136A		Corridor (12)	↓ ↓
B		↓	
137A		Classroom 1	Concrete Deck
B		↓	
138A		outside storage Rm	Block Wall
B		↓	↓
139A		↓	↓ Mortar
B		↓	↓ ↓
C		↓	↓
140A		Class 1/2 toilet	Epoxy Floor/Cove
B		Locker ↓	↓
141A		Class 1/2 toilet	↓ White Mud Bed
B		↓	↓
142A		Locker Shower wall Behind stage	Ceramic wall Adhesive Dark Brown
B		↓	↓
143A		Class 1 toilet	Ceramic wall Grout Thin Tan
B		Janitor Closet by outside door	↓ ↓
144A		Class 4 toilet	↓ Thick white
B		↓	↓

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

RECEIVED
EMSL
CINNAMINSON, NJ
2023 APR 19 P 3:40

Sample #	HA #	Sample Location	Material Description	
0413145A		1980's Addition Class P toilet	Ceramic Wall Mud	white
B		4 ↓	↓	↓
146 A		Janitor Closet by outside Rm	↓	Tan
B		Gym Shower	↓	↓
147A		Janitor Closet by outside Rm	Ceramic Floor Grout	Gray
B		Gym Shower	↓	↓
148 A		Class 4 toilet	↓	white
B		↓	↓	↓
149 A		↓	Ceramic Floor Mudbed	tan
B		Gym Shower	↓	↓
150 A		Janitor Closet by outside Rm	↓	Brown
B		↓ Rm 10	↓	↓
151 A		1902 Original Bldg Classroom 44	Sink Undercoating	Pink
B		↓ 38	↓	↓
152 A		↓ 43	↓	white
B		↓ 31	↓	↓
153 A		↓ 7	↓	Gray
B		25	↓	↓
C		Nurses	↓	↓
154A		Corridor By 37	Fire Door Insulation	Disc All Doors
B		↓	↓	
155A		Classroom 32	Red Fire Stop	
B		↓ 39	↓	
156 A		Attic	Batt Insulation Backing	Black paper
B		↓	↓	

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 14 P 3:40

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041357A		1962 original Bldg Classroom 43	Interior window Glazing hard thin old (PCB)
B		↓ 44	↓
158A		↓ 44	many rooms Sink Backsplash Caulk white newer
B		22	↓
159A		30 (other rooms)	Interior window/Sill Caulk white hard age?
B		↓	↓
160A		Library entry	Interior Window Glazing Black sticky PCS?
B		↓ Room	↓
161A		Library entry	Interior Door/Window Glazing
B		↓	↓
162A		Corridor (8)	↓
B		↓ (3/4) to 6	↓
163A		Classroom 43	Black board (assume glued down)
B		↓ 32	↓
164A		Classroom 43	Counter top Adhesive
B		↓	↓
165A		Classroom 9	Gray Bulletin Board
B		↓	↓
166A		↓	↓ Canvass Cover Adhesive
B		↓	↓
167A		Classroom 43	Bulletin Board
B		↓ 31	↓
168A		↓ 43	↓ Adhesive Dark Brown
B		↓ 31	↓

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*:

RECEIVED EMSL CINNAMINSON, NJ 042309385

2023 APR 19 P 3:40

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
841 3/6A		1902 Original Bldg Classroom 20	Green Bull Board
B		↓	↓
170A		↓	Red Bulletin Board
B		↓	↓
171A		↓	↓ Brown Adhesive
B		↓	↓
172A		Classroom 44	Sink Wall Gray Layer
B			↓
173A			Black Layer
B			↓
174A			Brown Adhesive
B			↓
175A		↓ 7	Ball Board Adhesive Brown Mastic
B		↓ 9	↓ ↓
176A		Library	Wall Adhesive Brown
B		↓	↓ ↓
177A		Classroom 7	↓ White
B		↓	↓
178A		↓ 8	↓ Yellow
B		↓	↓
179A		↓ 44	2x2/2x4 Ceiling Tiles Dark Backing
B		↓ 43	↓
180A		↓ 5	2x4 Ceiling Tile Tan Backing
B		↓ 1	↓ ↓

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:40

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041318A		1902 Original Bldg Library	2x4 Ceiling Tile
B		↓	↓
182A		Toilet by 9	Gypsum Ceiling tile 2x4
B		↓	↓
183A		Corridor (44)	Gypsum Board
B		Nurse	↓
C		Class Room 7	↓
184A		↓ 31 Closet	Joint Tape Compound
B		Library	↓
C		Classroom 7	↓
185A		↓ 9	One Coat Ceiling Plaster
B		5 Closet	↓
C		↓ ↓	↓
186A		Corridor (8)	Wall Plaster White Finish Coat
B		(5)	↓ ↓
C		Classroom 7 Beam	↓ ↓
187A		Corridor (8)	Rough Coat Gray/tan
B		↓ (5)	↓ ↓
C		Classroom 7 Beam	↓ ↓
188A		↓ 23	Wall Plaster White Finish Coat
B		↓ 28	↓ ↓
C		Corridor	↓
189A		Classroom 23	Rough Coat Gray/tan
B		28	↓
C		Corridor	↓ ↓

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED
EMSL
CINNAMINSON, NJ
2009 MAY 19 P 3:40

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location		Material Description	
041390A		1902 Original Bldg	Classroom 23	Ceiling Plaster	White Finish Coat
B			~~25~~		
C			28		
191A			23		Gray/tan Rough Coat
B			25		
C			28		
192A			31	Wall Plaster	White Finish Coat
B			43		
C			44		
193A			31		Gray/tan Rough Coat
B			43		
C			44		
194A			31	Ceiling Plaster	White Finish Coat
B			43		
C			44		
195A			31		Gray/tan Rough Coat
B			43		
C			44		
196A			Main Office	18"x18"	Floorg material
B					
197A					Gray material
B					
198A					yellow mastic
B					

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED EMSL CINNAMINSON, N.J. 2023 APR 19 P 3:40

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
043199A		1962 Original Bldg Lower Floor Starwell	Gray Floor Leveler
B		↓	↓
200A		Starwell 35	Older Floor Tile
B		↓ ~~[illegible]~~ Lower Level	↓
201A		35	Black Mastic
B		↓ Lower Level	↓ ↓
202A		Classroom 43	12x12 Light Blue Floor Tile
B		Lower Level Corridor	↓
203A		Classroom 43	Black Mastic
B		Lower Level Corridor	↓ ↓
C		Classroom 9	
204A		30	Red Floor Material under Plywood
B		↓	↓
205A		39	Paper under Plywood Floor
B		↓ ↓	↓
206A		(some Black mastic middle Lately) Starwell (44)	Rubber Floor Adhesive yellow
B		↓	↓
207		↓	Black Mastic under Rubber Floor
208A		02 Library	Olera Carpet Adhesive yellow
B		505 ↓	↓
209A		toilet room by 7	Epoxy Floor
B			↓
210A		2nd Floor Corridor	Terrazzo Floor
B		↓	↓

NOB TEM 187 negative by PLM

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:41

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041321 1A		1902 Original Bldg 2nd Flr Corridor	Terrazzo Floor Mud Bed
B		↓	↓
212A		Classroom 43	Dark Cove base
B		Corridor at 5	↓
213A		Classroom 43	↓ Adhesive yellow
03 4-19-23 B		Corridor at 5	↓ ↓
214A		(most areas) Nurse Office	Cove base
B		Library	↓
C		Stair well	↓
215A		Nurse office	↓ Adhesive white/tan
B		Library	↓
C		Stairwell	↓
216		Lower Level Corridor	↓
217		↓	↓ Mastic
218A		Library	Dark Leveler / Floor Material
B		↓	↓
219A		↓	Beige Concrete Floor Material
B		↓	↓
220A		↓	Gray Concrete Floor Material
B		↓	↓
221A		Attic	Brick wall
B		↓	↓
222A		↓	Mortar Brick
B		↓	↓

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED EMSL CINNAMINSON, NJ 2022 APR 19 P 3:41

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
0413223A		1902 Original Bldg Attic	Brick wall Grout
B		↓ ↓	↓
224A			new Wall Mortar / Grout
B			↓
225A			Wall Plaster White Finish Coat
B			↓
C			↓
226A			Gray / Tan rough coat
B			↓
C			↓
227A			Hard Gray Floor Material Plaster ?
B		↓	↓
228A		1950 Addition	↓
B		↓	↓
229A		1902 Original Bldg 2nd Floor Corridor Toilet	Ceramic wall Mud Bed Bags wh
B		↓ ↓	↓
230A		↓? last closet	↓ gray
B		↓	↓
231A		Main Office toilet	Ceramic wall tile Adhesive
B		↓	↓
C		Room 8 toilet	↓
232A		main office toilet	Ceramic wall tile Grout Thick white
B		↓	↓ ↓
233A B		Custodial closet	↓ thin white

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 14 PM 3:41

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location			Material Description	
041237-1A		1902 Original Bldg	2nd Mens toilet		Ceramic Wall tile Grout	tan
B			womens ⊥		⊥	⊥
235			Classroom 8 toilet		Ceramic wall tile Grout	tan
236A			Mens toilet 2nd		Ceramic Floor Mud Bed wick	
B			⊥		⊥	
237A			Custodial 2nd closet 1st?		⊥	tan Grey
B			⊥		⊥	⊥
238A			Main office toilet		⊥	tan Grey
B			⊥		⊥	⊥
239A			⊥		Ceramic Floor tile Adhesive	
B			⊥		⊥	
C			Classroom 8 toilet		⊥	
240A			Cust. Closet		Ceramic Floor Grout	Dark Grey
B			main office toilet		⊥	⊥
241A			Mens toilet 2nd		⊥	
B			⊥		⊥	
242			Class 8 toilet		Ceramic Floor Grout	
243A		tunnels	1x3 2?	3'x3'	Black Paper Debris	
B			⊥	⊥	⊥	
244A			Gym office Area	1'SF	Debris Tan Paper	
B				⊥	⊥	
245A		perimeter at ceiling	Gym		Black tar Paper	
B			⊥		⊥	
246A + B		BR/10 Area	→	Brick concrete	Found wall? Black tar Paper	

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED EMSL CINNAMINSON, NJ 2025 APR 19 P 3:41

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
0413247A		1990's Addition	Exterior Window Sill Caulk White
B		↓	↓
248A		↓	Exterior wall Exp/vent wing/Door RI Caulk Beige
B		↓	↓
249A		1957 Addition	Foundation Tar Damp-proofing
B		↓	↓
250A		↓	Ext Wall/Paint Lower Floor
B		↓	↓
C		↓	↓
251A		↓	Ext. vent Caulk old PCB
B		↓	↓
252A		↓	Ext Door Caulk newer
B		↓	↓ ↓
253A		↓	Ext Window Caulk newer
B		↓	↓ ↓
254A		1950 Addition	Ext Window Caulk Glass Block Thick OLD PCB
B		↓	↓
255A		↓	Ext Window Caulk white/yellow newer Can't Find date
B		↓	↓
256A		↓ PAR on & resid w adds Door	Ext Door Caulk older PCB
B		↓	↓ ↓
257A		↓	↓ newer on top white
B		↓	↓ ↓
258A B		↓	Ext Wall Expansion Caulk OLD PCB

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED
EMSL
CINNAMINSON, NJ
2023 APR 19 P 3:41

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041325911		1958 Addition Boiler Room	Ext Vent Caulk newer
B		↓	↓
260A			↓ OLDER PCB
B			
261A			↓ OLDER PCB
B		Lower	
262A		Front Bldg	Ext wall / Paint Front
B			↓
C		↓ vent same?	
263A		1902 Original Bldg	Ext Window Caulk newer white/yellow Cont. tend old
B			↓
264A			Ext Door Caulk newer
B			↓
265A			↓ older PCB
B			↓
266A		Main Entry	Front Door & Windows Caulk & glaze OLDER PCB
B		↓	↓
267A		1957 Roof	Copper Flashing Caulk newer
B		↓	↓ ↓
268A		19~~[illegible]~~ 90s Roof 4A	↓ newer
B		50 ↓ 5	↓ ↓
269A		50 Roof 1	Perimeter Caulk newer
B		90's ↓ 4A	↓ ↓
270 A		90s Roof	Building Exp Caulk newer
B		& 50s ↓	& HVAC Caulk Gray

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 17 P 3:41

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location			Material Description
041327A		1990S Roofs	14B		Top Layer Roof Shingle
B					⊥
272A					Bottom Layer Roof Shingle
B					⊥
273A					Black paper under Shingles
B					⊥
274A			4A		Perimeter Flashing tar (on wood)
B					⊥
275A					Penetration Flashing tar
B					⊥
276A				3x3	HVAC Tar (under Caulk)
B					⊥
277A			4A & 57	20SF	Copper Flash tar
B					⊥
278A				cable	Tar Patch Copper Flash tar
B					⊥
279A					Rolled Roof (top)
B					⊥
280A					Soft Concrete (2nd layer)
B					⊥
281A					Fiberboard paper layer (3rd)
B					⊥
282A					Soft Concrete Deck
B					⊥

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

RECEIVED EMSL CINNAMINSON, N.J. 2023 APR 19 P 3:41

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
0413283A		1957 Roof	Rolled Roof [redacted] same as 4A
284 [redacted]			Soft Concrete
285			Fourboard Paper
286A			Bottom Layer Tar
286B			
287A			Perimeter Flashing (rolled roof same)
288 [redacted]			Soft Concrete
289A			Perimeter Wall Tar (Top Thick)
B			
290A			tar paper (Bottom)
B			
291A			Tar on Brick perimeter wall
B			
292A		others same	Chimney Roof Flashing
B			
293A		1950 Roof Roof 3	Top Layer Roof Shingle
B		5	
[redacted] C		6	
D		7	
294A		3	2nd Layer Roof Shingle
B		5	
C		6	
D		7	
295A B		Roof 3	3rd Layer

***Comments/Special Instructions:**

Controlled Document – Asbestos COC – R6 – 11/29/2012

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

RECEIVED EMSL CINNAMINSON, NJ

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location		Material Description
041329LA		1950 Roof	Roof 3	Black paper under shingles
B			5	
C			6	
D			7	
297A			3	Concrete Roof Deck
B			5	
C			6	
298A			5	Copper Flashing tar
B				
299A			3	Gutter tar
B				
300A				Gutter Seam tar
B				
301A		1902 Roof	9	Top Layer Shingle
B				
302A				2nd Layer
B				
303A				3rd Layer
B				
304A				Black Paper under Shingle
B				
305A		1950's Roof	1	Top Layer metal Roll Roof
B			2	
306 A			1	soft concrete (Handpacked, weak)
B			2	

*Comments/Special Instructions:

Controlled Document – Asbestos COC – R6 – 11/29/2012

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 PM 3:41

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location		Material Description
04133071		1950 Roof	Roof 1	Field Paper Layers
B			2	↓
308A			1	Field Bottom Layer Tar
B			2	↓
309A			2	Tar on Deck
B			2	↓ perimeter
310A			1	Penetration Flashing Top Layer
B			1	↓
311A			1	2nd layer
B			1	↓
312A			1	Bottom on Concrete
B			1	↓
313A			1	Perimeter Flash Top Tar
B			2	↓ ↓
314A			1	Bottom tar
B			1	↓ ↓
315A			1	Tar on metal Trim
B			1	↓ & wood Deck
316A			1	Perimeter wall at Gym Top Tar Flash
B			2	↓ ↓ ↓
317A			1	2nd layer Tar at Gym Perimeter Flash
B			2	↓ ↓
318 A B		3x5	12, 5, 33 / 1, 2, 4A etc	Roof over Bay windows 4A Roofing walk mats
319 A B			↓	Roofing Field / Flash

*Comments/Special Instructions:

Controlled Document – Asbestos COC – R6 – 11/29/2012

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY · PRODUCTS · TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:40

Company: Langan CT	**EMSL-Bill to:** ☐ Same ☒ Different If Bill to is Different note instructions in Comments: Langan_InvoiceCapture@ConcurSolutions.com *Third Party Billing requires written authorization from third party*
Street: 555 Long Wharf Drive	
City: New Haven **State/Province:** CT	**Zip/Postal Code:** 06511 **Country:** USA
Report To (Name): Matthew Myers	**Telephone #:** 203.562.5771
Email Address: MMyers@Langan.com	**Fax #:** 203.789.6142 **Purchase Order:**
Project Name/Number: 140265802	**Please Provide Results:** ☐ Fax ☒ Email Public School
U.S. State Samples Taken: CT	**CT Samples:** ☐ Commercial/Taxable ☒ Residential/Tax Exempt

Turnaround Time (TAT) Options* – Please Check

☐ 3 Hour ☐ 6 Hour ☐ 24 Hour ☐ 48 Hour ☐ 72 Hour ☐ 96 Hour ☒ 1 Week ☐ 2 Week

*For TEM Air 3 hr through 6 hr, please call ahead to schedule.*There is a premium charge for 3 Hour TEM AHERA or EPA Level II TAT. You will be asked to sign an authorization form for this service. Analysis completed in accordance with EMSL's Terms and Conditions located in the Analytical Price Guide.

PLM - Bulk (reporting limit)

- ☒ PLM EPA 600/R-93/116 (<1%)
- ☐ PLM EPA NOB (<1%)
- Point Count ☒ 400 (<0.25%) ☐ 1000 (<0.1%) If <3%
- Point Count w/Gravimetric ☐ 400 (<0.25%) ☐ 1000 (<0.1%)
- ☐ NIOSH 9002 (<1%)
- ☐ NY ELAP Method 198.1 (friable in NY)
- ☐ NY ELAP Method 198.6 NOB (non-friable-NY)
- ☐ OSHA ID-191 Modified
- ☐ Standard Addition Method

TEM – Bulk

- ☐ TEM EPA NOB – EPA 600/R-93/116 Section 2.5.5.1
- ☐ NY ELAP Method 198.4 (TEM)
- ☐ Chatfield Protocol (semi-quantitative)
- ☐ TEM % by Mass – EPA 600/R-93/116 Section 2.5.5.2
- ☐ TEM Qualitative via Filtration Prep Technique
- ☐ TEM Qualitative via Drop Mount Prep Technique

Other

- ☐ Old Greenwich School

☒ **Check For Positive Stop – Clearly Identify Homogenous Group** | **Date Sampled:** 4/10 - 4/13/23

Samplers Name: Willie Thompson, Matt Myers | **Samplers Signature:**

Sample #	HA #	Sample Location	Material Description
041B01A		1990's Addition Classroom 115	Black Sink Undercoating
B			↓
02A			Gray Sink Undercoating
B		114	↓
03A		115 Closet	Kiln
B			↓
04A			Kiln Roping
B			↓
05A		115	Sink Caulking
B			↓

Client Sample # (s): | **Total # of Samples:** 697

Relinquished (Client): | **Date:** 4/17/23 | **Time:**

Received (Lab): Richard Stamp FYE | **Date:** 4-19-23 | **Time:** 9:40 am

Comments/Special Instructions:

4/25/23 4/27/23 4/27/23 4/28/23 697 WS Tomás Montoya De Oca 4/26/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

RECEIVED EMSL CINNAMINSON, NJ 2023 1/5 19 P 3:40

Sample #	HA #	Sample Location	Material Description
041306A		1990's Addition Classroom	Window Sill Caulking
B		⊥	⊥
07A		Cafe/Corridor	Interior Door Window Glazing Black Putty
B		Kitchen Exit Door	⊥
08A		Kitchen	HVAC Duct Seam Sealant
B		⊥	⊥
09A		⊥	2x4 Ceiling tile
B		⊥	⊥
10A		Classrooms/Corridor/Cafe	⊥
B		⊥	⊥
11A		Classroom 115	Gypsum Board
B		⊥ 114	⊥
12A		115	Joint/Taping Compound
B		⊥ 114	⊥ ⊥
C		Kitchen	
13A		Kitchen	Sheet Flooring
B		↓	⊥
14A		↓	Adhesive Tan Black
B		↓	⊥ ⊥
15A		↓	Grey Cement Substrate
B		↓	⊥
16A		Cafe	12x12 Pink Floor Tile
B		↓	⊥
17A		↓	12x12 White Floor Tile
B		classroom/115 Closet	⊥

*Comments/Special Instructions:

EMSL ANALYTICAL, INC. CHARLE PLACE, NY 2023 JAN 27 P 6:54

4/27/23 4/27/23 Page 2 of 29 pages Lorena Montes de Oca 4/26/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/27/23 4/26/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:40

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041318A		1990's Addition Classroom 114	12x12 Blue Floor Tile
B		Cafe	↓
C		Kitchen Storage	↓
19A		Classroom 114	↓ yellow mastic
B		Cafe	↓ ↓
C		Kitchen Storage	↓
20A		Classroom 115	Floor Tile Leveler
B		114	↓
21A		Exit Door Entry	Rubber Sheet Flooring
B		↓	↓
22A		↓	↓ Yellow Adhesive
B		↓	↓ ↓
23A		Kitchen	Gray Floor Leveler ONLY
B		↓	↓
24A		Cafeteria	Dark Cove Base
B		Classroom 115	↓
25A		Cafeteria	↓ white Adhesive
B		Classroom 115	↓ ↓
26A		Classroom 115 Closet	Pink Cove Base
B		↓	↓
27A		↓	↓ Yellow Adhesive
B		↓	↓ ↓
28A		Kitchen Storage	white Cove Base
B		↓	↓

*Comments/Special Instructions:

EMSL ANALYTICAL, INC. CAMDEN, NJ 2023 APR 19 P 1:

4/27/23 4/27/23

Page 3 of 29 pages

Jorge Montoto de Oca 4/26/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/27/23 4/28/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:40

Sample #	HA #	Sample Location	Material Description
041329A1		1990's Addition Kitchen Storage	White Cove Base Tan Adhesive
B		↓	↓
30A		Kitchen	Plastic Wall Adhesive
B		↓	↓
31A		Cafeteria/Corridor	Wall/Bulletin Board Adhesive
B		↓	↓
32A		Corridor	Fabric Cover
B		Classroom 114	↓ ↓
33A		Corridor	Gray Material
B		Classroom 114	↓ ↓
34A		Corridor	Brown Material
B		↓	↓ ↓
35A		Cafeteria/Corridor Toilet Rooms	Ceramic Wall Tile Gray Mud Mortar Hard ONLY
B		~~Toilet Rooms~~ ↓	↓
36A		Toilet Rooms	Ceramic Floor Tile Mud Bed
B			↓ ↓
37A			Grout
B			↓ ↓
38A			Ceramic Wall Tile Grout
B	↓	↓	↓
39A		1957 Addition Classroom 37	White Sink Undercoating
B		24	↓
40A		6	Gray Sink Undercoating
B	↓	6	↓

*Comments/Special Instructions:

Page 4 of 29 pages

Controlled Document – Asbestos COC – R6 – 11/29/2012

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED EMSL CINNAMINSON NJ 2023 APR 19 P 3:40

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location		Material Description	
041341A		1957 Addition	Classroom 37	Interior Window Glazing	Above Door (PCB)
B		↓	↓	↓	
42A		↓	37	2x2 Ceiling Tile	
B		↓	24	↓	
43A		↓	24	Gypsum Board	
B		↓	6	↓	
44A		↓	24	↓	Joint/ Taping Compound
B		↓	6	↓	↓
C		↓	↓	↓	↓
45A		Classroom	37	Wall Plaster	Finish White Coat
B		↓	↓	↓	↓
C		↓	↓	↓	↓
D		↓	24	↓	↓
E		↓	↓	↓	↓
F		↓	6	↓	↓
G		↓	↓	↓	↓
46A		Classroom	37	↓	Grey Rough Coat
B		↓	↓	↓	↓
C		↓	↓	↓	↓
D		↓	24	↓	↓
E		↓	↓	↓	↓
F		↓	6	↓	↓
G		↓	↓	↓	↓
47A		↓	24	Black Paper on Concrete Deck	
B		↓	↓	↓	

RECEIVED EMSL ANALYTICAL, INC. CAMILLE FLAGG 2023 APR 21 P 6:54

***Comments/Special Instructions:**

4/25/23 4/27/23 Page 5 of 29 pages Jamie Montalvo 4/26/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/27/23 4/28/23 4/28/23

4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY·PRODUCTS·TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*:

RECEIVED 042309385
EMSL
CINNAMINSON, NJ
2023 APR 19 P 3:40

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
0413 48A		1957 Addition Classroom 37	Black Damproofing Perimeter Wall
B		↓	↓
49A		37	12x12 Light Blue Floor Tile
B		24	↓
50A		6	12x12 Blue Floor Tile
B		↓	↓
51A		37	↓ Black Mastic
B		↓ 6	↓ ↓
52A		↓ 37	Formica Countertop Adhesive
B		↓	↓
53A		6	Cove Base
B		↓	↓
54A		↓	Adhesive White Tan
B		↓	↓
55A		Classroom 37	Bulletin Board Top Layer
B		↓	↓
56A		↓	↓ Light Brown Adhesive
B		↓	↓
57A		↓	Second Layer
B		↓	↓
58A		↓	↓ Brown Adhesive
B		↓	↓ ↓
59A		Classroom 6	↓ Adhesive Gray
B		↓	↓ ↓

Mastic Adhesive Asbestos Rem

EMSL ANALYTICAL, INC. RECEIVED 2023 APR 21 P 6:54

*Comments/Special Instructions:

Tomás Montoto Ocon 4/26/23

4/25/23 87 4/27/23 4/27/23 4/28/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*:

042309385

RECEIVED-
EMSL
CINNAMINSON N.J.

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

2023 APR 19 P 3:40

Sample #	HA #	Sample Location	Material Description
041360A		1950 Addition Classroom 42 (41 also)	white Sink undercoating
B		2	⊥
61A		1 toilet	Light Grey Sink undercoating
B		1 ⊥	⊥ ⊥
62A		4	Dark Grey
B		4	⊥ ⊥
63A		Mech Rm Above 29 media	Duct Pin Adhesive Brown
B			⊥
64A			Duct Insulation Residue white
B			⊥
C		⊥	
65A		Outside Storage Room (bldg 3)	Duct Insulation Grey
B			⊥
C		⊥	
66A		Mech Rm Above 29 media in Bridge place	Pipe End Cap Insulation
B			⊥
C		⊥	
67A		Attic (4 area)	Mineral Wool Loose Insulation
B		Mech Rm Above 29 media	
C		⊥	⊥
68A		Boiler Room	Spray Applied Fireproofing
B			
C			
D			
E		⊥	⊥

*Comments/Special Instructions:

4/27/23

Page 7 of 29 pages

4/25/23

Tomás Montoto Ocra 4/25/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/28/23 4/27/23 4/27/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED
CINNAMINSON, NJ
2023 APR 19 P 3:40

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041369A		1950 Mediterran Locker Rm	Reel Fire Stop Caulking never
B		⊥	⊥
70A		Mech Rm Above 29 mechanical	Duct Seam Caulking never
B		⊥	⊥
71A		Classroom 41	Interior Door Window Glazing Black PCB
B		⊥ 42	⊥ ⊥
72A		Room 29 media	⊥ ⊥
B		⊥	⊥ ⊥
73A		Stairwell by 41 & 29	Interior Glass Block Window Grout
B		⊥	⊥ ⊥
74A		⊥	Interior Window Caulk old Thick Hard PCB
B		⊥	⊥
75A		Gymnasium	Interior Window Caulk never white
B		⊥	⊥
76A		⊥	older Black Thick PCB
B		⊥	⊥
77A		Stair/hall by 12	Interior Door Caulk hard Thin white PCB
B		Gym Foyer Lobby ⊥ corridor	⊥ ⊥
78A		Gym Foyer ~~Corridor~~	Interior Door/Window Caulk Perimeter Exit
B		⊥	⊥ ⊥
79A		Classroom 3/4 Corridor	Interior Door Caulk white never
B		⊥ ⊥	⊥ ⊥
80A		⊥ ⊥	Interior Window Caulk Black sticky Age?
B		⊥ ⊥	⊥ ⊥

*Comments/Special Instructions:

4/27/23

Page 8 of 29 pages

4/25/23

Tomas Montalvo Oca 4/26/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/27/23

4/28/23

4/27/23

4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY · PRODUCTS · TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:40

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041381A		1950 Addition Classroom 3/4 Corridor	Interior Window Glaze Neon white
B		⊥	⊥
82A		Classroom 41	Blackboard Assume Glue
B		⊥ 42	⊥
83A		⊥ 41	Slate Window Sill Glue?
B		⊥ 42	⊥
84A		⊥ ⊥	Formica Counter Adhesive
B		⊥ ⊥	⊥
85A		⊥ 41	2x2 Ceiling Tiles Dark Brown Backing
B		Gym Foyer Lobby	⊥ ⊥
86A		Classroom 3	⊥ Light Tan Backing
B		⊥ 4	⊥
87A		Locker Toilet	Gypsum ceiling tile
B		Aux Toilet	⊥
88A		Classroom 1	1x1 Ceiling Tiles Large Hole
B			⊥ ⊥
89A			⊥ Small pin hole
B			⊥
90A			⊥ Smooth
B			⊥ ⊥
91A		Teacher Room/Lounge	⊥ Kitchenette
B		⊥	⊥ ⊥
92A		Classroom 1	1x1 ceiling tile Adhesive Yellow
B		⊥	⊥ ⊥

*Comments/Special Instructions:

RECEIVED EMSL ANALYTICAL, INC. CARLSTADT, NJ 2023 APR 21 P 6:04

4/27/23 Page 9 of 29 pages 4/25/23 Jorge Montoya 4/26/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/27/23 4/28/23 4/28/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:49

Sample #	HA #	Sample Location	Material Description
041393A		1950 Addition Classroom	9x9 Ceiling tile Adhesive Dark Brown
B		↓	↓ ↓
94A		Classroom 41	Gypsum Board
B		Locker toilet	↓
C		Corridor (Rm 2)	
95A		Classroom 43 Closet	Taping/Joint compound
B		Locker toilet	↓ ↓
C		Corridor (Rm 2)	
96A		Corridor Closet by 43	One Coat Ceiling Plaster
B		Utility Rm by 10	↓
C		↓	
97A		Outside Storage Rm by 3	One Coat Wall Plaster (cement?)
B		↓	↓
C			
98A		Classroom 1	Ceiling Plaster White Finish Coat
B		↓	↓ ↓
C		Janitor Closet / Storage adjacent outside An	
99A		Classroom 1	Rough Coat tan/gray
B		↓	↓ ↓
C		Janitor Closet / Storage adjacent outside An	
100A		Classroom 1	Wall Plaster White Finish coat
B		Janitor Closet	↓
C		↓	
101 A B		Classroom 1 Janitor Closet	Rough Coat tan/gray
		↓	↓ ↓

*Comments/Special Instructions:

RECEIVED EMSL ANALYTICAL INC. 2023 APR 21 PM 5:54 CINNAMINSON NJ

Page 10 of 29 pages

Controlled Document – Asbestos COC – R6 – 11/29/2012

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*:

RECEIVED EMSL CINNAMINSON, NJ 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

2023 APR 19 P 3:40

Sample #	HA #	Sample Location	Material Description	
041310 2A		1958 Addition Gym Locker Rms	Ceiling Plaster	White Finish Coat
B		↓	↓	↓
C		↓	↓	↓
103A		↓	↓	Gray/Tan Rough Coat
B		↓	↓	↓
C		↓	↓	↓
104A		↓	Wall Plaster	White Finish Coat
B		↓	↓	↓
C		Gym Corridor	↓	↓
105A		Gym Locker Rms	↓	Gray/Tan Rough Coat
B		↓	↓	↓
C		Gym Corridor	↓	↓
106A		Media Center Data Rm	Wall Plaster	White Finish Coat
B		Corridor (41)	↓	↓
C		Classroom 41	↓	↓
107A		Media Center Data Rm	↓	Gray/Tan Rough Coat
B		Corridor (41)	↓	↓
C		Classroom 42	↓	↓
108A		Media Center Data Rm	Ceiling Plaster	White Finish Coat
B		Stairwell (42)	↓	↓
C		↓	↓	↓
109A		Media Center Data Rm	↓	Gray/Tan Rough Coat
B		Stairwell (42)	↓	↓
C		↓	↓	↓

EMSL ANALYTICAL RECEIVED CARE PLACE, NJ 2023 APR 21 P 6:50

***Comments/Special Instructions:**

4/27/23

Page 11 of 29 pages

4/25/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/27/23

4/28/23

Jamie Montes-LeDoux 4/26/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:40

Sample #	HA #	Sample Location	Material Description
04131101A		1950 Addition Stage	Black Paper under wood Floor
B		↓	↓
111A		under stage	Black Tar on Block wall
B		↓	↓
112A		↓	Black Paper on Block wall
B		↓	↓
113A		Cust Closet (ramp) by 10	9x9 Floor tile
B		↓	↓
114A		↓	Black mastic
B		↓	↓
115A		Custodial office	↓
B		under shelving	↓
116A		↓	Black mastic
B		↓	↓
117A		Custodial office	12x12 Blue Floor tile
B		Classroom 4	↓
C		↓	↓
118A		Custodial office	Black mastic
B		Classroom 4	↓
119A		Gym office	12x12 white Floor tile
B		↓	↓
120A		↓	Black mastic
B		↓	↓
		↓	

NOB TEM negative 23 PLM

RECEIVED EMSL ANALYTICAL LAB 2023 APR 21 PM 6:55

***Comments/Special Instructions:**

4/27/23 Page 12 of 29 pages Tomás Montsalle Ocn 4/26/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/25/23 4/28/23 4/27/23 4/28/29 4/27/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*:

RECEIVED EMSL CINNAMINSON, NJ 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

2023 APR 19 P 3:40

Sample #	HA #	Sample Location	Material Description
041321A		1950 Addition Classroom 41/40	12x12 Green Blue Floor tile
B		↓	↓
122A		↓	↓ Black Mastic
B		↓	↓ ↓
123A		Classroom 3/4/corridor	Cove Base
B		Classroom 4	↓
124A		Classroom 3/4/corridor	↓ Adhesive
B		Classroom 4	↓ ↓
125A		Classroom 42	Sink wall Gray material
B		↓	↓ ↓
126A		↓	↓ Black Material behind gray
B		↓	↓ ↓
127A		↓	↓ Adhesive behind black
B		↓	↓ ↓
128A		Corridor 3/4 rooms	Wood Panel Wall Adhesive Yellow Brown
B		↓	↓ ↓
129A		Classroom 42 Closet	Cork Bull. Board Adhesive Dark Brown
B		↓ 41 ↓	↓
130A		Same as 12 Classroom 42	Bulletin Board
B		↓ 41	↓
131A		↓ 42	↓ Adhesive Dark Brown
B		↓ 41	↓ ↓
132A		Classroom 12	Bull Board Adhesive Light Brown
B		↓	↓

Area 132A is negative by PLM

***Comments/Special Instructions:**

4/25/23 4/27/23 Page 13 of 29 pages Jorge Montes de Oca 4/26/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/28/23 4/27/23 4/28/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*:

RECEIVED 042309385
EMSL
CINNAMINSON, NJ
2023 APR 19 P 3:40

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041313311		1950's Addition Classroom 1	Grey Bulletin Board (on black)
B		Teachers Lounge	↓
134A		Corridor (41)	Terrazzo Floor
B		↓	↓
135A		↓	↓ Mud Bed
B			↓
136A		Corridor (12)	↓ ↓
B		↓	↓ ↓
137A		Classroom 1	Concrete Deck
B		↓	
138A		outside storage Rm	Block Wall
B			↓
139A			↓ Mortar
B		↓	↓ ↓
C		↓	↓ ↓
140A		Class 1/2 toilet	Epoxy Floor Wave
B		Locker ↓	↓
141A		Class 1/2 toilet	↓ White Mud Bed
B		↓	↓ 0.1%
142A		Locker Shower 1 wall Behind stage	Ceramic wall Adhesive Dark Brown
B		↓	↓
143A		Class 1 toilet	Ceramic wall Grout Thin Tan
B		Janitor Closet by outside Rm	↓ ↓
144A B		Class 4 toilet ↓	↓ Thick white

*Comments/Special Instructions:

Page 14 of 29 pages

Tomás Montoto de Oca 4/26/23

4/25/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/27/23

4/26/23

4/26/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:40

Sample #	HA #	Sample Location	Material Description
0413145A		1980's Addition Class P 3 toilet	Ceramic wall Mud. white
B		4 ⊥	⊥ ⊥
146 A		Janitor Closet by outside Rm	⊥ Tan
B		Gym Shower	⊥ ⊥
147A		Janitor Closet by outside Rm	ceramic floor Grout Gray
B		Gym Shower	⊥ ⊥
148 A		Class 4 toilet	⊥ white
B		⊥	⊥ ⊥
149 A		⊥	Ceramic Floor Mudbed tan
B		Gym Shower	⊥ ⊥
150 A		Janitor Closet by outside Rm	⊥ Brown
B		⊥ Rm 10	⊥ ⊥
151 A		1980 Original Bldg Classroom 4	Sink Undercoating Pink
B		⊥ 38	⊥ ⊥
152 A		⊥ 43	⊥ white
B		⊥ 31	⊥ ⊥
153 A		⊥ 7	⊥ Gray
B		⊥ 25	⊥
C		nurses	⊥ ⊥
154A		Corridor By 37	Fire Door Insulation Disc All Doors
B		⊥	⊥
155A		Classroom 32	Red Fire Stop
B		⊥ 39	⊥
156 A		Attic	Boot Insulation Backing Black paper
B		⊥	⊥

***Comments/Special Instructions:**

Erin 4/25/23 4/27/23 Page 15 of 29 pages Jonas Montes De Oca 4/26/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

Erin 4/28/23 4/27/23 4/27/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

RECEIVED
2023 APR 17 P 3:40
CINNAMINSON, NJ

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041357A		1960 original Bldg Classroom 43	Interior Window Glazing hard thin old (PCB)
B		↓ 44	↓
158A		↓ 44	many rooms Sink Backsplash Caulk white newer
B		22	↓
159A		30 (other rooms)	Interior Window/Sill Caulk white hard age?
B		↓	↓
160A		Library entry	Interior Window Glazing Black 90s? sticky
B		↓ Room	↓
161A		Library entry	Interior Door Window Glazing
B		↓	↓
162A		Corridor (B)	↓
B		↓ (3/4)	↓
163A		Classroom 43	Black board (assume glue daubs)
B		↓ 32	↓
164A		Classroom 43	Counter top Adhesive
B		↓	↓
165A		Classroom 9	Gray Bulletin Board
B		↓	↓
166A		↓	↓ Canvass Cover Adhesive
B		↓	↓
167A		Classroom 43	Bulletin Board
B		↓ 31	←
168A		↓ 43	↓ Adhesive Dark Brown
B		↓ 31	↓

***Comments/Special Instructions:**

4/27/23 Page 16 of 29 pages Jaime Montes de Oca 4/26/23

4/28/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/28/23 4/27/23 4/26/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*:

RECEIVED EMSL 042309385 CINNAMINSON, NJ 2023 APR 19 P 3:40

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
841 3/6A		1902 Original Bldg Classroom 20	Green Bull Board
B		↓	↓
170A		↓	Red Bulletin Board
B		↓	↓
171A		↓	↓ Brown Adhesive
B		↓	↓ ↓
172A		Classroom 44	Sink Wall Gray Layer
B		↓	↓ ↓
173A		↓	↓ Black Layer
B		↓	↓ ↓
174A		↓	↓ Brown Adhesive
B		↓	↓ ↓
175A		↓ 7	Ball Board Adhesive Brown Mat
B		↓ 9	↓ ↓
176A		Library	Wall Adhesive Brown
B		↓	↓ ↓
177A		Classroom 7	↓ White
B		↓	↓
178A		↓ 8	↓ Yellow
B		↓	↓ ↓
179A		↓ 44	2x2/2x4 Ceiling Tiles Dark Backing
B		↓ 43	↓
180A		↓ 5	2x4 Ceiling Tile Tan Backing
B		↓ 1	↓ ↓

***Comments/Special Instructions:**

4/25/23 4/27/23 Page 17 of 29 pages Jorge Montoya De Oca 4/26/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/28/23 4/27/23 4/28/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:40

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041318A		1902 Original Bldg Library	2x4 Ceiling Tile
B		↓	↓
182A		Toilet by 9	Gypsum Ceiling tile 2x4
B		↓	↓
183A		Corridor (44)	Gypsum Board
B		Nurse	↓
C		Class Room 7	↓
184A		↓ 31 Closet	Joint Tape Compound
B		Library	↓
C		Classroom 7	↓
185A		↓ 9	One Coat Ceiling Plaster
B		5 Closet	↓
C		↓ ↓	↓
186A		Corridor (8)	Wall Plaster White Finish Coat
B		(5)	↓ ↓
C		Classroom 7 Beam	↓ ↓
187A		Corridor (8)	Rough Coat Gray/tan
B		↓ (5)	↓
C		Classroom 7 Beam	↓ ↓
188A		↓ 23	Wall Plaster White Finish Coat
B		↓ 28	↓
C		Corridor	↓
189A		Classroom 23	Rough Coat Gray/tan
B		28	
C		Corridor	↓ ↓

***Comments/Special Instructions:**

4/27/23 Page 18 of 29 pages Jessica Montalvo 4/26/23

4/28/23

4/28/23 4/27/23 4/28/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY•PRODUCTS•TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

RECEIVED EMSL CINNAMINSON, NJ

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location		Material Description	
043190A		1902 Original Bldg	Classroom 23	Ceiling Plaster	White Finish Coat
B			25		
C			28		
191A			23		Gray/Tan Rough Coat
B			25		
C			28		
192A			31	Wall Plaster	White Finish Coat
B			43		
C			44		
193A			31		Gray/Tan Rough Coat
B			43		
C			44		
194A			31	Ceiling Plaster	White Finish Coat
B			43		
C			44		
195A			31		Gray/Tan Rough Coat
B			43		
C			44		
196A			Main Office	18"x18"	Flooring Material
B					
197A					Gray Material
B					
198A					yellow mastic
B					

***Comments/Special Instructions:**

4/25/23 4/27/23 Page 19 of 29 pages Tomás Montoya-Ocha 4/26/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/28/23 4/27/23 4/28/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY•PRODUCTS•TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED EMSL CINNAMINSON, N.J. 2023 APR 14 P 3:40

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041399A		1962 Original Bldg Lower Floor Starwell	Gray Floor Leveler
B		↓	↓
200A		Starwell 35	Older Floor Tile
B		↓ Lower Level	↓
201 A		↓ 35	↓ Black Mastic
B		↓ Lower Level	↓ ↓
202 A		Classroom 43	12x12 Light Blue Floor Tile
B		Lower Level Corridor	↓
203 A		Classroom 43	↓ Black Mastic
B		Lower Level Corridor	↓ ↓
C		Classroom 9	
204 A		↓ 30	Red Floor Material under Plywood
B		↓	↓
205 A		↓ 39	Paper under Plywood Floor
B		↓ ↓	↓
206 A		(some Black mastic under layers) Starwell (44)	Rubber Floor Adhesive Yellow
B		↓	↓
207		↓	Black Mastic under Rubber Floor
208 A		02 Library	Olera Carpet Adhesive Yellow
B		505 ↓	↓
209 A		Toilet Room 7	Epoxy Floor
B			↓
210 A		2nd Floor Corridor	Terrazzo Floor
B		↓	↓

NOB 1273 1283 negative by PLM

***Comments/Special Instructions:**

Page 20 of 29 pages

Tomas Montalvo Ocn 4/26/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY · PRODUCTS · TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:41

Sample #	HA #	Sample Location	Material Description
04132111A		1902 Original Bldg 2nd Flr Corridor	Terrazzo Floor Mud Bed
B		↓	↓
212A		Classroom 43	Dark Coverbase
B		Corridor at 5	↓
213A		Classroom 43	Adhesive Yellow
B		Corridor at 5	↓
214A		(most areas) Nurse Office	Coverbase
B		Library	↓
C		Stair Well	↓
215A		Nurse Office	Adhesive White/Tan
B		Library	↓
C		Stairwell	↓
216		Lower Level Corridor	↓
217		↓	↓ Adhesive
218A		Library	Dark Leveler / Floor Material
B		↓	↓
219A		↓	Beige Concrete Floor Material
B		↓	↓
220A		↓	Gray Concrete Floor Material
B		↓	↓
221A		Attic	Brick Wall
B		↓	↓
222A		↓	Mortar Brick
B		↓	↓

*Comments/Special Instructions:

4/27/23 4/27/23 Page 21 of 29 pages Tomas Montoya De Oca 4/26/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/28/23 4/27/23 4/28/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): RECEIVED 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

RECEIVED EMSL CINNAMINSON, NJ APR 19 P 3:11

Sample #	HA #	Sample Location		Material Description	
04132234		1902 Original Bldg	Attic	Brick wall Grout	
B				↓	
224A				Wall Mortar/Grout	
B				↓	
225A				Wall Plaster	White Finish Coat
B					↓
C					↓
226A					Gray/Tan rough coat
B					↓
C					↓
227A				Hard Gray Floor Material	Plaster ?
B		↓		↓	
228A		1950 Addition		↓	
B		↓	↓	↓	
229A		1902 Original Bldg	2nd Floor Corridor Toilet	Ceramic Wall Mud Bed	Beige wh
B			↓	↓	
230A			↓? last closet	↓	gray
B			↓	↓	↓
231A			Main office toilet	Ceramic wall tile Adhesive	
B			↓	↓	
C			Room 8 toilet	↓	
232A			Main office Toilet	Ceramic wall tile Grout	Thick white
B			↓	↓	↓
233A B		↓	Custodial closet	↓	Thin white

*Comments/Special Instructions:

4/25/23 4/27/23 Page 22 of 29 pages Jorge Montes de Oca 4/26/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/28/23 4/27/23 4/28/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 12 PM 3:

Sample #	HA #	Sample Location	Material Description
041237-1A		1902 Original Bldg Mens Toilet	Ceramic Wall tile Grout tan
B		women ⊥	⊥ ⊥
235		Classroom 8 Toilet	Ceramic wall tile Grout tan
236A		Mens Toilet 2nd	Ceramic Floor Mud Bed wick
B		⊥	⊥
237A		Custodial 2nd closet 1st?	⊥ tan Grey
B		⊥	⊥ ⊥
238A		Main Office Toilet	⊥ tan Grey
B		⊥	⊥
239A		⊥	Ceramic Floor tile Adhesive
B		⊥	⊥
C		Classroom 8 Toilet	
240A		Cust. Closet	Ceramic Floor Grout Dark Grey
B		main Office Toilet	⊥ ⊥
241A		Mens Toilet 2nd	⊥
B		⊥	⊥
242		Class 8 Toilet	Ceramic Floor Grout
243A	tunnels	1x3 2? 3'x3'	Black Paper Debris
B		⊥ ⊥	⊥
244A		Gym office Area 1'SF	Debris Tan Paper
B		⊥	⊥
245A	perimeter at ceiling	Gym	Black Tar Paper
B		⊥	⊥
246A + B	BR/10 Area	→ Brick concrete Found wall?	Black Tar Paper ⊥

*Comments/Special Instructions:

Page 23 of 29 pages

Controlled Document – Asbestos COC – R6 – 11/29/2012

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number (*Lab Use Only*): 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:41

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
0413247A		1990's Addition	Exterior Window Sill Caulk white
B			⊥
248A			Exterior wall Exp/vent wing/Door RT Caulk Beige
B			⊥
249A		1957 Addition	Foundation Tar Damp-proofing
B			⊥
250A			Ext wall/Paint Lower Floor
B			⊥
C			⊥
251A			Ext. vent Caulk old PCB
B			⊥
252A			Ext Door Caulk newer
B			⊥ ⊥
253A			Ext Window Caulk newer
B			⊥ ⊥
254A		1950 Addition	Ext Window Caulk Glass Black Thick OLD PCB
B			
255A			Ext Window Caulk white/yellow newer Can't Find old
B			⊥
256A		PARN addn & residence Door	Ext Door Caulk Older PCB
B			⊥ ⊥ newer on top white
257A			⊥
B			⊥ ⊥
258A			Ext wall Expansion Caulk OLD PCB
B			⊥

*Comments/Special Instructions:

4/27/23 Page 24 of 29 pages Jorge Montes De Oca 4/26/23

4/28/23

Controlled Document – Asbestos COC – R5 – 11/29/2012

4/28/23 4/27/23 4/28/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED: EMSL CINNAMINSON, NJ 2023 APR 19 P 3:41

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
041325971		1958 Addition Boiler Room	Ext vent Caulk newer
B		↓	↓
260A			↓ OLDER PCB
B			↓
261A			↓ OLDER PCB
B		Lower	↓
262A		Front Bldg	Ext wall / Paint Front
B			↓
C		↓	↓
263A		1902 Original Bldg vent same?	Ext Window Caulk newer white/yellow
B			↓ Caulk stained old
264A			Ext door Caulk newer
B			↓
265A			↓ older PCB
B			↓
266A		Main Entry	Front door & windows Caulk & glaze OLDER PCB
B		↓	↓
267A		1957 Roof	Copper Flashing Caulk newer
B		↓	↓ ↓
268A		1905 Roof 4A	↓ newer
B		50 ↓ 5	↓ ↓
269A		50 Roof 1	Perimeter Caulk newer
B		90S ↓ 4A	↓ ↓
270 A		90S Roof	Building Exp Caulk newer
B		& 50S ↓	& HVAC Caulk Gray

*Comments/Special Instructions:

4/27/23 Page 25 of 29 pages Jorge Montes De Oca 4/26/23

4/28/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/27/23 4/28/23 4/20/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

RECEIVED EMSL CINNAMINSON, NJ

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location			Material Description
041327 1A		1990S Roofs	14B		Top Layer Roof Shingle
B					⊥
272A					Bottom Layer Roof Shingle
B					⊥
273A					Black paper under Shingles
B					⊥
274A			4A		Perimeter Flashy tar (on wood)
B					⊥
275A					Penetration Flashy tar
B					⊥
276A				3x3	HVAC Tar (under Caulk)
B					⊥
277A			4A & 57	20SF	Copper Flash tar
B					⊥
278A				cable	Tar Patch Copper Flash tar
B					⊥
279A					Redhead Roof (top)
B					⊥
280A					Soft Concrete (2nd layer)
B					⊥
281A					Fearboard paper layer (3rd)
B					⊥
282A					Soft Concrete Deck
B			⊥		⊥

*Comments/Special Instructions:

4/28/23 Page 26 of 29 pages Jessica Martinez-Ortiz 4/26/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/27/23 4/27/23 4/28/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 19 P 3:41

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
0413283A		1957 Roof	Rolled Roof (same as 4A)
284			Soft Concrete
285			Fourboard Paper
286A			Bottom Layer Tar
286B			
287A			Perimeter Flashing (rolled roof same)
288			Soft Concrete
289A			Perimeter Wall Tar (Top) (Thick)
B			
290A			Tar paper (Bottom)
B			
291A			Tar on Brick perimeter wall
B			
292A		others same	Chimney Roof Flashing
B			
293A		1950 Roof Roof 3	Top Layer Roof Shingle
B		5	
C		6	
D		7	
294A		3	2nd Layer Roof Shingle
B		5	
C		6	
D		7	
295A B		Roof 3	3rd Layer

*Comments/Special Instructions:

RECEIVED EMSL ANALYTICAL INC. 2023 APR 2 6:58 CARLE PLACE, NY

Page 27 of 29 pages

Tomas Montalvo Orea 4/26/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/27/23 4/27/23 4/28/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED EMSL CINNAMINSON, NJ 2023 APR 27 PM 1:41

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location		Material Description
041329GA		1950 Roof	Roof 3	Black paper under shingles
B			5	
C			6	
D			7	
297A			3	Concrete Roof Deck
B			5	
C			6	
298A			5	Copper Flashing tar
B				
299A			3	Gutter tar
B				
300A				Gutter Seam tar
B				
301A		1902 Roof	9	Top Layer Shingle
B				
302A				2nd Layer
B				
303A				3rd Layer
B				
304A				Black Paper under Shingle
B				
305A		1950's Roof	1	Top Layer Metal Roll Roof
B			2	
306 A B			1 2	soffit concrete (Hampton Wells 2847)

*Comments/Special Instructions:

EMSL ANALYTICAL, INC. CHARLESTON, WV 2023 APR 27 PM 3:58 RECEIVED

4/27/23 Page 28 of 29 pages Jomão Montoe de Oca 4/26/23 4/28/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/27/23 4/27/23 4/28/23

OrderID: 042309385

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 042309385

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

RECEIVED
EMSL
CINNAMINSON, NJ
2023 APR 19 P 3:41

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location		Material Description
B4133071		1950 Roof Roof	1	Field Paper Layers
B			2	⊥
308A			1	Field Bottom Layer Tar
B			2	⊥
309A			2	Tar on Deck
B			2	⊥ perimeter
310A			1	Penetration Flashy top Layer
B			1	⊥
311A			1	2nd layer
B			1	⊥
312A			1	Bottom on Corner
B			1	⊥
313A			1	Perimeter Flash Top Tar
B			2	⊥ ⊥
314A			1	Bottom tar
B			1	⊥ ⊥
315A			1	Tar on metal trim
B			1	⊥ ⊥ & wood Deck
316A			1	Perimeter wall algm top tar Flash
B			2	⊥ ⊥ ⊥
317A			1	2nd layer tar at Corner Flash
B			2	⊥ ⊥
318 A B		3x5	12 5 33 / 1 2 1 4A etc	Roof over Bay windows 4A Roofing walk mats
319 A B			⊥	Roofing Field / Flash

*Comments/Special Instructions:

4/28/23 4/27/23 Page 29 of 29 pages Tomás Martes DeOca 4/26/23

Controlled Document – Asbestos COC – R6 – 11/29/2012

4/28/23 4/28/23 4/27/23 4/28/23

EMSL Analytical, Inc.

165 Gracey Avenue Meriden, CT 06451

Tel/Fax: (203) 284-5948 / (203) 284-5978

http://www.EMSL.com / meridenlab@emsl.com

EMSL Order: 242304166
Customer ID: LANG78
Customer PO:
Project ID:

Attention: Matthew Myers
Langan Engineering
Long Wharf Maritime Center
555 Long Wharf Drive
New Haven, CT 06511
Project: 140265802/OLD GREENWICH SCHOOL

Phone: (203) 562-5771
Fax: (203) 789-6142
Received Date: 08/09/2023 3:25 PM
Analysis Date: 08/16/2023
Collected Date:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

			Non-Asbestos		Asbestos
Sample	**Description**	**Appearance**	**% Fibrous**	**% Non-Fibrous**	**% Type**
080901 *242304166-0001*	Room 13 - Ground Floor - Firewood door insulation	Gray Fibrous Homogeneous	40% Cellulose	60% Non-fibrous (Other)	None Detected
080902 *242304166-0002*	Classroom 115 - Interior window caulking	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
080903 *242304166-0003*	Café - Interior window caulking	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
080904 *242304166-0004*	Café - Interior window caulking	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
080905A *242304166-0005*	Gymnasium - Ceiling tile white layer on fiberboard	Brown/White Fibrous Homogeneous	75% Cellulose	25% Non-fibrous (Other)	None Detected
080905B *242304166-0006*	Gymnasium - Ceiling tile white layer on fiberboard	Brown/White Fibrous Homogeneous	75% Cellulose	25% Non-fibrous (Other)	None Detected
080906A *242304166-0007*	Attic - Terracotta wall	Red Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
080906B *242304166-0008*	Attic - Terracotta wall	Brown/Red Non-Fibrous Homogeneous		6% Quartz 94% Non-fibrous (Other)	None Detected
080907A *242304166-0009*	Attic - Mortar	Gray Non-Fibrous Homogeneous		8% Quartz 92% Non-fibrous (Other)	None Detected
080907B *242304166-0010*	Attic - Mortar	Gray Non-Fibrous Homogeneous		8% Quartz 92% Non-fibrous (Other)	None Detected
080907C *242304166-0011*	Attic - Mortar	Gray Non-Fibrous Homogeneous	2% Cellulose	8% Quartz 90% Non-fibrous (Other)	None Detected
080908A *242304166-0012*	Original Bldg Corridor (38) - Glazed block wall mud bed	Gray Non-Fibrous Homogeneous		8% Quartz 92% Non-fibrous (Other)	None Detected
080908B *242304166-0013*	Original Bldg Corridor (38) - Glazed block wall mud bed	Gray Non-Fibrous Homogeneous		8% Quartz 92% Non-fibrous (Other)	None Detected
080909A *242304166-0014*	Original Bldg Corridor (38) - Mortar	Gray Non-Fibrous Homogeneous		8% Quartz 92% Non-fibrous (Other)	None Detected
080909B *242304166-0015*	Original Bldg Corridor (38) - Mortar	Gray Non-Fibrous Homogeneous		8% Quartz 92% Non-fibrous (Other)	None Detected
080910A *242304166-0016*	1925 Addition (41) - Wall mud bed	Gray Non-Fibrous Homogeneous		8% Quartz 92% Non-fibrous (Other)	None Detected

Initial report from: 08/16/2023 14:21:08

EMSL Analytical, Inc.
165 Gracey Avenue Meriden, CT 06451
Tel/Fax: (203) 284-5948 / (203) 284-5978
http://www.EMSL.com / meridenlab@emsl.com

EMSL Order: 242304166
Customer ID: LANG78
Customer PO:
Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

			Non-Asbestos		Asbestos
Sample	**Description**	**Appearance**	**% Fibrous**	**% Non-Fibrous**	**% Type**
080910B *242304166-0017*	1925 Addition (41) - Wall mud bed	Gray Non-Fibrous Homogeneous		8% Quartz 92% Non-fibrous (Other)	None Detected
080911A *242304166-0018*	1925 Addition (41) - Mortar	Gray Non-Fibrous Homogeneous		8% Quartz 92% Non-fibrous (Other)	None Detected
080911B *242304166-0019*	1925 Addition (41) - Mortar	Gray Non-Fibrous Homogeneous		8% Quartz 92% Non-fibrous (Other)	None Detected
080912A *242304166-0020*	1950 Addition (1/2) - Wall mud bed	Gray Non-Fibrous Homogeneous		8% Quartz 92% Non-fibrous (Other)	None Detected
080912B *242304166-0021*	1950 Addition (1/2) - Wall mud bed	Gray Non-Fibrous Homogeneous		8% Quartz 92% Non-fibrous (Other)	None Detected
080913A *242304166-0022*	1950 Addition (1/2) - Mortar	Gray Non-Fibrous Homogeneous		8% Quartz 92% Non-fibrous (Other)	None Detected
080913B *242304166-0023*	1950 Addition (1/2) - Mortar	Gray Non-Fibrous Homogeneous		8% Quartz 92% Non-fibrous (Other)	None Detected
080914A *242304166-0024*	1925 Addition Rm 23 - Dark floor thick filler material	Brown Non-Fibrous Homogeneous		8% Quartz 92% Non-fibrous (Other)	None Detected
080914B *242304166-0025*	1925 Addition Rm 23 - Dark floor thick filler material	Brown/Black Non-Fibrous Homogeneous		8% Quartz 92% Non-fibrous (Other)	None Detected
080915A *242304166-0026*	1925 Addition Rm 23 - White floor thick filler material	Gray Non-Fibrous Homogeneous		5% Vermiculite 95% Non-fibrous (Other)	None Detected
080915B *242304166-0027*	1925 Addition Rm 23 - White floor thick filler material	Gray/Tan Non-Fibrous Homogeneous	2% Cellulose	5% Vermiculite 93% Non-fibrous (Other)	None Detected
080916 *242304166-0028*	1925 Addition Rm 23 - Green old floor tile	Green Non-Fibrous Homogeneous		94% Non-fibrous (Other)	6% Chrysotile
080917 *242304166-0029*	1925 Addition Rm 23 - Green old floor tile black mastic	Black Non-Fibrous Homogeneous	3% Cellulose	3% Quartz 94% Non-fibrous (Other)	None Detected
080918 *242304166-0030*	1925 Addition Rm 41 - Green old floor tile	Green Non-Fibrous Homogeneous		94% Non-fibrous (Other)	6% Chrysotile
080919 *242304166-0031*	1925 Addition Rm 41 - Green old floor tile black mastic	Tan/Black Non-Fibrous Homogeneous	5% Cellulose 2% Synthetic	93% Non-fibrous (Other)	None Detected
080920 *242304166-0032*	Original Bldg Rm 24 - Green old floor tile	Green Non-Fibrous Homogeneous		92% Non-fibrous (Other)	8% Chrysotile
080921 *242304166-0033*	Original Bldg Rm 24 - Green old floor tile black mastic	Black Non-Fibrous Homogeneous	5% Cellulose	95% Non-fibrous (Other)	None Detected

Initial report from: 08/16/2023 14:21:08

EMSL Analytical, Inc.
165 Gracey Avenue Meriden, CT 06451
Tel/Fax: (203) 284-5948 / (203) 284-5978
http://www.EMSL.com / meridenlab@emsl.com

EMSL Order:	242304166
Customer ID:	LANG78
Customer PO:	
Project ID:	

Analyst(s)

Shannon Halloran (11)
Sara Poppa (22)

Danny Sandhu, Asbestos Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 “Interim Method”) but augmented with procedures outlined in the 1993 (”final”) version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Meriden, CT NVLAP Lab Code 200700-0,

Initial report from: 08/16/2023 14:21:08

OrderID: 242304166

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*: 242304166

Company: Langan CT	**EMSL-Bill to:** ☐ Same ☒ Different If Bill to is Different note instructions in Comments: Langan_InvoiceCapture@ConcurSolutions.com *Third Party Billing requires written authorization from third party*
Street: 555 Long Wharf Drive	
City: New Haven **State/Province:** CT	**Zip/Postal Code:** 06511 **Country:** USA
Report To (Name): Matthew Myers	**Telephone #:** 203.562.5771
Email Address: MMyers@Langan.com	**Fax #:** 203.789.6142 **Purchase Order:**
Project Name/Number: 140265802	**Please Provide Results:** ☐ Fax ☒ Email Public School
U.S. State Samples Taken: CT	**CT Samples:** ☐ Commercial/Taxable ☒ Residential/Tax Exempt

Turnaround Time (TAT) Options* – Please Check

☐ 3 Hour ☐ 6 Hour ☐ 24 Hour ☐ 48 Hour ☐ 72 Hour ☐ 96 Hour ☒ 1 Week ☐ 2 Week

*For TEM Air 3 hr through 6 hr, please call ahead to schedule. There is a premium charge for 3 Hour TEM AHERA or EPA Level II TAT. You will be asked to sign an authorization form for this service. Analysis completed in accordance with EMSL's Terms and Conditions located in the Analytical Price Guide.

PLM - Bulk (reporting limit)	TEM – Bulk
☒ PLM EPA 600/R-93/116 (<1%)	☐ TEM EPA NOB – EPA 600/R-93/116 Section 2.5.5.1
☐ PLM EPA NOB (<1%)	☐ NY ELAP Method 198.4 (TEM)
Point Count ☒ 400 (<0.25%) ☐ 1000 (<0.1%) If <3%	☐ Chatfield Protocol (semi-quantitative)
Point Count w/Gravimetric ☐ 400 (<0.25%) ☐ 1000 (<0.1%)	☐ TEM % by Mass – EPA 600/R-93/116 Section 2.5.5.2
☐ NIOSH 9002 (<1%)	☐ TEM Qualitative via Filtration Prep Technique
☐ NY ELAP Method 198.1 (friable in NY)	☐ TEM Qualitative via Drop Mount Prep Technique
☐ NY ELAP Method 198.6 NOB (non-friable-NY)	**Other**
☐ OSHA ID-191 Modified	☐ Old Greenwich School
☐ Standard Addition Method	

☒ **Check For Positive Stop – Clearly Identify Homogenous Group** **Date Sampled:** 8/9/23

Samplers Name: Willie Thompson & Matt Myers **Samplers Signature:** [signature]

Analyze All

Sample #	HA #	Sample Location	Material Description
080901		Room 13 - Ground Floor	Wood Fire Door Insulation
02		Classroom 115	Interior Window Caulking
03		Cafe	↓
04		↓	↓
05A		Gymnasium	Ceiling Tile White Layer on Fiber board
B		↓	↓
06A		Attic	Terra Cotta Wall
B		↓	↓
07 A B		↓	Mortar
C		↓	↓

Client Sample # (s): **Total # of Samples:** 33

Relinquished (Client): [signature] **Date:** 8/9/23 **Time:**

Received (Lab): **Date:** **Time:**

Comments/Special Instructions:

RECEIVED AUG 09 2023 By [signature] 15:25 WA

Controlled Document – Asbestos COC – R6 – 11/29/2012

Page 1 of 2 pages

OrderID: 242304166

EMSL ANALYTICAL, INC.
LABORATORY • PRODUCTS • TRAINING

Asbestos Bulk Building Material Chain of Custody

EMSL Order Number *(Lab Use Only)*:

EMSL ANALYTICAL, INC.
200 ROUTE 130 NORTH
CINNAMINSON, NJ 08077
PHONE: (800) 220-3675
FAX: (856) 786-5974

Additional Pages of the Chain of Custody are only necessary if needed for additional sample information

Sample #	HA #	Sample Location	Material Description
080908A		Original Bldg Corridor (38)	Glazed Block Wall Mud Bed
B		↓	↓
09A		↓	Mortar
B		↓	↓
10A		1925 Addition (41)	Wall Mud Bed
B		↓	↓
11A		↓	Mortar
B		↓	↓
12A		1950 Addition (1/2)	Wall Mud Bed
B		↓	↓
13A		↓	Mortar
B		↓	↓
14A		1925 Addition Rm 23	Dark Floor Thick Filler Material
B		↓	↓
15A		↓	White Floor
B		↓	↓
16		1925 Addition Rm 23	Green Old Floor Tile
17		↓	Black Mastic
18		Rm 41	
19		↓	Black Mastic
20		Original Bldg Rm 24	
21		↓	Black Mastic

Analyze All

***Comments/Special Instructions:**

RECEIVED AUG 09 2023 By 15:25

Page 2 of 2 pages

Controlled Document – Asbestos COC – R6 – 11/29/2012

Appendix B

XRF Field Data Sheets

(1)

PRELIMINARY XRF
LBP TESTING DATA SHEET

Client Name:

Site Address

Project No. Old Greenwich school

Survey Date 4-10-23

Total Assays Reported:

	Survey ID#	Component	Substrate	Paint Color	Test Location	XRF Readings K Shell mg/cm2	XRF Readings L Shell mg/cm2	XRF Readings K-Fe mg/cm2	Results	Comments
1950	01	wall	plaster	white	2nd floor Hallway				-0.2	
	2	|	|	|	|				-0.1	
	3	door	wood	stained	Room 41				0	
	4	|	|	|	Room 42				0	
	5	door casing	metal	brown	Room 41				-0.3	
	6	|	|	|	Room 42				-0.2	
	7	calibration							0.9	
	8	|							1.0	
	9								1.0	
	10	wall	plaster	off white	Room 41				-0.2	
	11	cabinet	wood	stained	|				0.1	
	12	baseboard	wood	|	|				0	
	13	electrical conduit	plastic	white	|				0.7	
	14	molding	wood	white	|				0	
	15	storage door	wood	brown	corridor				0	
	16	| door casing	metal	|	|				0.2	
	17	~~staircase~~ door	~~door~~ wood	stained	staircase				0	
	18	door casing	door ~~casing~~ metal	brown	|				0.3	
	19	|	|	blue	|				0.7	
	20	post (handrail)	|	|	|				1.6	
	21	|	|	|	|				3.2	
	22	stair	concrete	grey	|				0.3	
	23	wall tile	ceramic	brown	corridor				0.3	
1902	24	wall	plaster	white	|				0.1	
	25	|	white	|	|				0.1	

Notes: N = Negative
P = Positive

14763\xrftest

(2)

PRELIMINARY XRF
LBP TESTING DATA SHEET

Client Name:

Site Address

Project No.

Survey Date

Total Assays Reported:

Survey ID#	Component	Substrate	Paint Color	Test Location	XRF Readings K Shell mg/cm2	XRF Readings L Shell mg/cm2	XRF Readings K-Fe mg/cm2	Results	Comments
1902 26	wall	ceramic tile	brown	2nd floor corridor				0	
27								-0.1	
28	door	wood	stained	Room 35				0	
29	door casing		brown					5.2	
30	door casing			Room 38				11.3	
31	door		stained					0	
32	fire extinguisher box	meta	red	corridor				0.5	
33	door	wood	stained	staircase				0	
34	door casing	metal	brown					11.9	
35			blue					2.3	
36	stair post							1.7	
37	stair handrail							0.5	
38	stringer							1.4	
39	wall	plaster	offwhite	Room 33				0.1	
40	cabinet	wood	stained					0	
41	electrical conduit	plastic	offwhite					0.1	
42		metal						0	
43	window casing	wood						13.1	
44	window sill							~~25~~ 18	
45	locker	metal	g beige	corridor				0	
46	Radiator cover		offwhite	Room 39				0.1	
47	wall molding	wood		Room 38				0.3	
48	door		stained	boys bath				-0.1	
49	door casing		brown					-0.1	
50	wall	plaster	offwhite					0.0	

Notes: N = Negative
P = Positive

14763\xrftest

PRELIMINARY XRF
LBP TESTING DATA SHEET

Client Name:

Site Address

Project No.

Survey Date

Total Assays Reported:

	Survey ID#	Component	Substrate	Paint Color	Test Location	XRF Readings K Shell mg/cm2	XRF Readings L Shell mg/cm2	XRF Readings K-Fe mg/cm2	Results	Comments
1902	51	wall	ceramic tile	brown	2nd floor boys bath				-0.3	
1957	52	door	wood	stained	room 37				-0.1	
	53	door casing	|	brown	|				-0.2	
	54	~~door~~ window casing	metal	white	|				0.1	
	55	window sill	wood	|	|				0	
	56	wall	plaster	|	|				-0.3	
	57	cabinet	wood	stained	|				-0.1	
1902	58	ceiling	plaster	brown	room 41				21	
1980	59	|	|	|	room 38				17	
	60	struct. beam	metal	red	attic				-0.1	
	61	wall	plaster	|	|				-0.3	
1902	62	door	wood	stained	1st floor library				-0.1	
	63	door casing	metal	blue	|				-0.1	
	64	column	S.R	yellow	|				-0.1	
	65	wall	|	|	|				-0.1	
	66	window casing	wood	white	|				12.7	
	67	window sill	|	stained	|				0	
	68	door	metal	blue	|				0.2	
	69	door casing	metal	blue	|				0.4	
	70	window casing	|	white	|				0	
1950	71	door	wood	stained	computer lab				-0.1	
	72	door casing	metal	blue	|				-0.1	
	73	inter. window casing	metal	blue	|				0	
	74	ext. window sill	|	stained	|				-0.1	
	75	wall	S.R	yellow	|				0	

Notes: N = Negative
P = Positive

14763\xrftest

(4)

PRELIMINARY XRF
LBP TESTING DATA SHEET

Client Name:

Site Address

Project No.

Survey Date

Total Assays Reported:

Survey ID#	Component	Substrate	Paint Color	Test Location	XRF Readings K Shell mg/cm2	XRF Readings L Shell mg/cm2	XRF Readings K-Fe mg/cm2	Results	Comments
				1st floor					
1950 76	Radiator cover	metal	white	computer lab				0	
1902 77	wall	plaster	yellow	corridor				0.2	
78	|	tile	brown	|				0	
79	door	wood	stained	|				0	
80	door casing	metal	brown	|				12	
81	handrail	|	blue	staircase				0.4	
82	Rail post	|	|	|				0.5	
83	wall	plaster	white	|				0.2	
84	door casing	metal	blue	|				1.4	
85	door	wood	stained	girls bath				-0.1	
86	door casing	metal	brown	|				0.5	
87	wall	SR	yellow	|				0.2	
88	wall	tile	|	|				-0.4	
89	floor	tile	|	|				0.1	
90	partition	plastic	|	|				0	
91	window casing	wood	|	|				22.8	
92	door	wood	stained	room 28				0	
93	door casing	wood	brown	|				0.4	
94	wall	plaster	off white	|				0	
95	cabinet	wood	stained	|				0	
96	wall molding	|	off white	|				0	
97	Radiator cover	metal	white	|				0.1	
98	window casing	wood	|	|				14.5	
99	window sill	wood	|	|				13.3	
100	door	wood	white	main entry				-0.1	

Notes: N = Negative
P = Positive

(5)

PRELIMINARY XRF
LBP TESTING DATA SHEET

Client Name:

Site Address

Project No.

Survey Date

Total Assays Reported:

	Survey ID#	Component	Substrate	Paint Color	Test Location	XRF Readings K Shell mg/cm2	XRF Readings L Shell mg/cm2	XRF Readings K-Fe mg/cm2	Results	Comments
					1st floor					
1902	101	door casing	wood	white	main entry				20.3	
	102	wall	plaster	white	|				0.2	
	103	|	|	|	corridor				-0.1	
1957	104	door	wood	stained	room 24				0	
	105	door casing	|	brown	|				0	
	106	wall	plaster	off white	|				-0.1	
	107	cabinet	wood	stained	|				-0.3	
	108	window sill	|	white	|				0	
	109	baseboard	wood	stained	|				-0.1	
	110	radiator cover	metal	brown	|				0	
1902	111	ceiling	plaster	brown	room 25				18.5	
1957	112	door	wood	stained	ground room 6				0	
	113	| casing	|	brown	|				-0.1	
	114	wall	S.R	white	|				0	
	115	soffit	|	|	|				0	
	116	door	wood	white	|				0	
	117	| casing	|	|	|				-0.1	
	118	window sill	|	|	|				0	
	119	radiator cover	metal	|	|				0	
1950	120	ceiling	plaster	white	closet @ room 2				-0.2	
	121	wall	|	|	|				-0.1	
	122	fire ladder	metal	brown	|				0.4	
	123	door	wood	white	|				0.1	
	124	door casing	metal	|	|				0.1	
	125	radiator cover	|	|	corridor				-0.1	

Notes: N = Negative
P = Positive

PRELIMINARY XRF
LBP TESTING DATA SHEET

Client Name:

Site Address

Project No.

Survey Date

Total Assays Reported:

Survey ID#	Component	Substrate	Paint Color	Test Location	XRF Readings K Shell mg/cm2	XRF Readings L Shell mg/cm2	XRF Readings K-Fe mg/cm2	Results	Comments
1950 126	wall	plaster	white	ground floor corridor				0	
127	door	wood	white	|				-0.1	
128	door casing	|	|	|				-0.3	
129	door	wood	stained	Room 2				-0.1	
130	| casing	wood	white	|				-0.2	
131	wall	plaster	white	|				0.3	
132	radiator cover	metal	white	|				-0.1	
133	door	metal	grey	Room 2 Bath				0	
134	| casing	|	|	|				0.2	
135	wall	SR	Beige	|				0.1	
136	|	tile	white	|				-0.3	
137	partition	plastic	|	|				-0.4	
138	wall	S.R	White	corridor				0.1	
139	|	wood	stained	|				0.1	
140	Calibration			—				0.9	
141	|			—				0.9	
142				—				1.0	
143	window casing	metal	white	corridor				0.1	
144	door	wood	stained	Room 3				-0.2	
145	| casing	metal	white	|				-0.1	
146	wall	SR	white	|				0.1	
147	ceiling	plaster	Brown	|				-0.2	
148	door	metal	white	corridor @#6				0	
149	| casing	|	|	|				0	
150	| |	|	Brown	|				0	

Notes: N = Negative
P = Positive

PRELIMINARY XRF
LBP TESTING DATA SHEET

Client Name:

Site Address

Project No.

Survey Date

Total Assays Reported:

	Survey ID#	Component	Substrate	Paint Color	Test Location	XRF Readings K Shell mg/cm2	XRF Readings L Shell mg/cm2	XRF Readings K-Fe mg/cm2	Results	Comments
					ground					
1950	151	locker	metal	beige	corridor				0	
	152	fire ext. box	metal	red	|				0.2	
	153	post	|	blue	staircase				0.4	
	154	riser	|	|	|				0.3	
	155	handrail	|	|	|				0.2	
	156	wall	plaster	white	men room				0	
	157	ceiling	|	|	|				0	
1990	158	door	wood	white	corridor @ cafe				-0.2	
	159	| casing	metal	|	|				-0.1	
	160	|	|	brown	|				0	
	161	| casing	|	|	|				0	
	162	wall	S.R	white	|				0	
	163	|	tile	|	|				-0.5	
	164	door	metal	brown	cafe				-0.1	
	165	| casing	|	|	|				0	
	166	wall	SR	white	|				0.1	
	167	Radiator cover	metal	grey	|				0.1	
	168	window sill	metal	white	|				0	
	169	door	wood	stained	gym				0	
	170	| casing	metal	brown	|				0.2	
	171	wall	CMU	white	|				-0.3	
	172	|	tile	brown	|				-0.1	
	173	floor	wood	stained	|				|	
1950	174	door	|	white	ext @ boiler				0	
	175	door casing	|	|	|				3.3	

Notes: N = Negative
P = Positive

8

PRELIMINARY XRF
LBP TESTING DATA SHEET

Client Name:

Site Address

Project No.

Survey Date

Total Assays Reported:

Survey ID#	Component	Substrate	Paint Color	Test Location	XRF Readings K Shell mg/cm2	XRF Readings L Shell mg/cm2	XRF Readings K-Fe mg/cm2	Results	Comments
				exterior					
1950 176	window casing	metal	white	Boiler Room				0.4	North
177	wall	concrete	grey	custodian				0.2	|
178	window casing	metal	white	utility office				0.2	|
179	|	|	|	Room 11				0.3	|
180	|	|	|	|				0	east
181	wall	concrete	Beige	teach. lounge				0	|
182	|	|	|	Room 10				0.1	|
183	window casing	metal	white	Room 5				1.1	|
184	|	|	|	on other side of stairs				1.1	|
185	hand rail	black ←	metal	side of main entry				0	|
186	|	metal	black	other side of main entry				0	|
187	door	wood	white	under main stair				0	|
188	door casing	|	|	~~[illegible]~~ |				3.2	|
189	door	|	|	main entry				-0.1	|
190	door casing	|	|	|				1.00	|
191	wall	concrete	Beige	Room 4				0.2	|
192	window casing	metal	white	|				0	|
193	door	wood	white	corridor to room 2				0	|
194	door casing	|	|	|				2.9	|
195	window casing	metal	|	|				0	|
196	|	|	|	Room 2				0.3	|
197	door	plastic	white	|				-0.1	south
198	door casing	wood	|	|				-0.1	|
199	|	~~plastic~~ metal	|	Room 1 - Hallway to				0.1	west
200	| casing	wood	|	|				0	

Notes: N = Negative
P = Positive

PRELIMINARY XRF
LBP TESTING DATA SHEET

Client Name:

Site Address

Project No.

Survey Date

Total Assays Reported:

	Survey ID#	Component	Substrate	Paint Color	Test Location	XRF Readings K Shell mg/cm2	XRF Readings L Shell mg/cm2	XRF Readings K-Fe mg/cm2	Results	Comments
					exterior					
1957	201	wall	concrete	grey	Room 6				0	west
	202	window casing	metal	white	|				0	|
	203	door	metal	|	|				-0.1	|
	204	| casing	|	|	|				-0.1	|
1950	205	wall	concrete	grey	Room 3				0.2	|
	206	window casing	metal	white	|				-0.1	|
1952	207	vent (wall)	metal	grey	Room 6				2.8	|
1950	208	Hand Rail	metal	black	Room 8				0	|
	209	|	|	|	Room 8				0.3	|
	210	|	|	|	Room 12				1.6	|
	211	door casing	wood	white	Room 8				2.8	|
1990	212	window casing	metal	white	Room 114				0.2	|
	213	vent grill	|	black	|				0	|
	214	door	wood	white	cafeteria corridor				0.1	|
	215	door casing	wood	white	|				0.1	|
	216	door	wood	white	Cafeteria				-0.1	north
	217	door casing	~~wood~~	|	|				0.2	|
	218	window casing	~~metal~~	|	|				-0.1	|
	219	vent grill	metal	grey	|				0	|
	220	yellow post	|	yellow	|				0.1	|
	221	door	wood	white	gym				0	|
	222	door casing	|	|	|				7.3	|
	223	calibration							1.0	
	224	|							1.0	
	225								0.9	

Notes: N = Negative
P = Positive

14763\xrftest

PRELIMINARY XRF
LBP TESTING DATA SHEET

Client Name: OID Greenwich school

Site Address

Project No. 140265803

Survey Date 8/9/23

Total Assays Reported:

Survey ID#	Component	Substrate	Paint Color	Test Location	XRF Readings K Shell mg/cm2	XRF Readings L Shell mg/cm2	XRF Readings K-Fe mg/cm2	Results	Comments
1	calibrate							1.1	
2	↓							1.1	
3	↓							1.1	
4	structural steel	Metal	Yellow	Rm 24 Auditorium				0.2	
5	↓	↓	Red	Attic				0.1	
6	↓	↓	Black	Rm 29 mech Space				0.3	
7	↓	↓	↓	↓				0.1	
8	calibrate							1.0	
9	↓							1.1	
10	↓							1.1	

Notes: N = Negative
P = Positive

Appendix C

Building Drawings

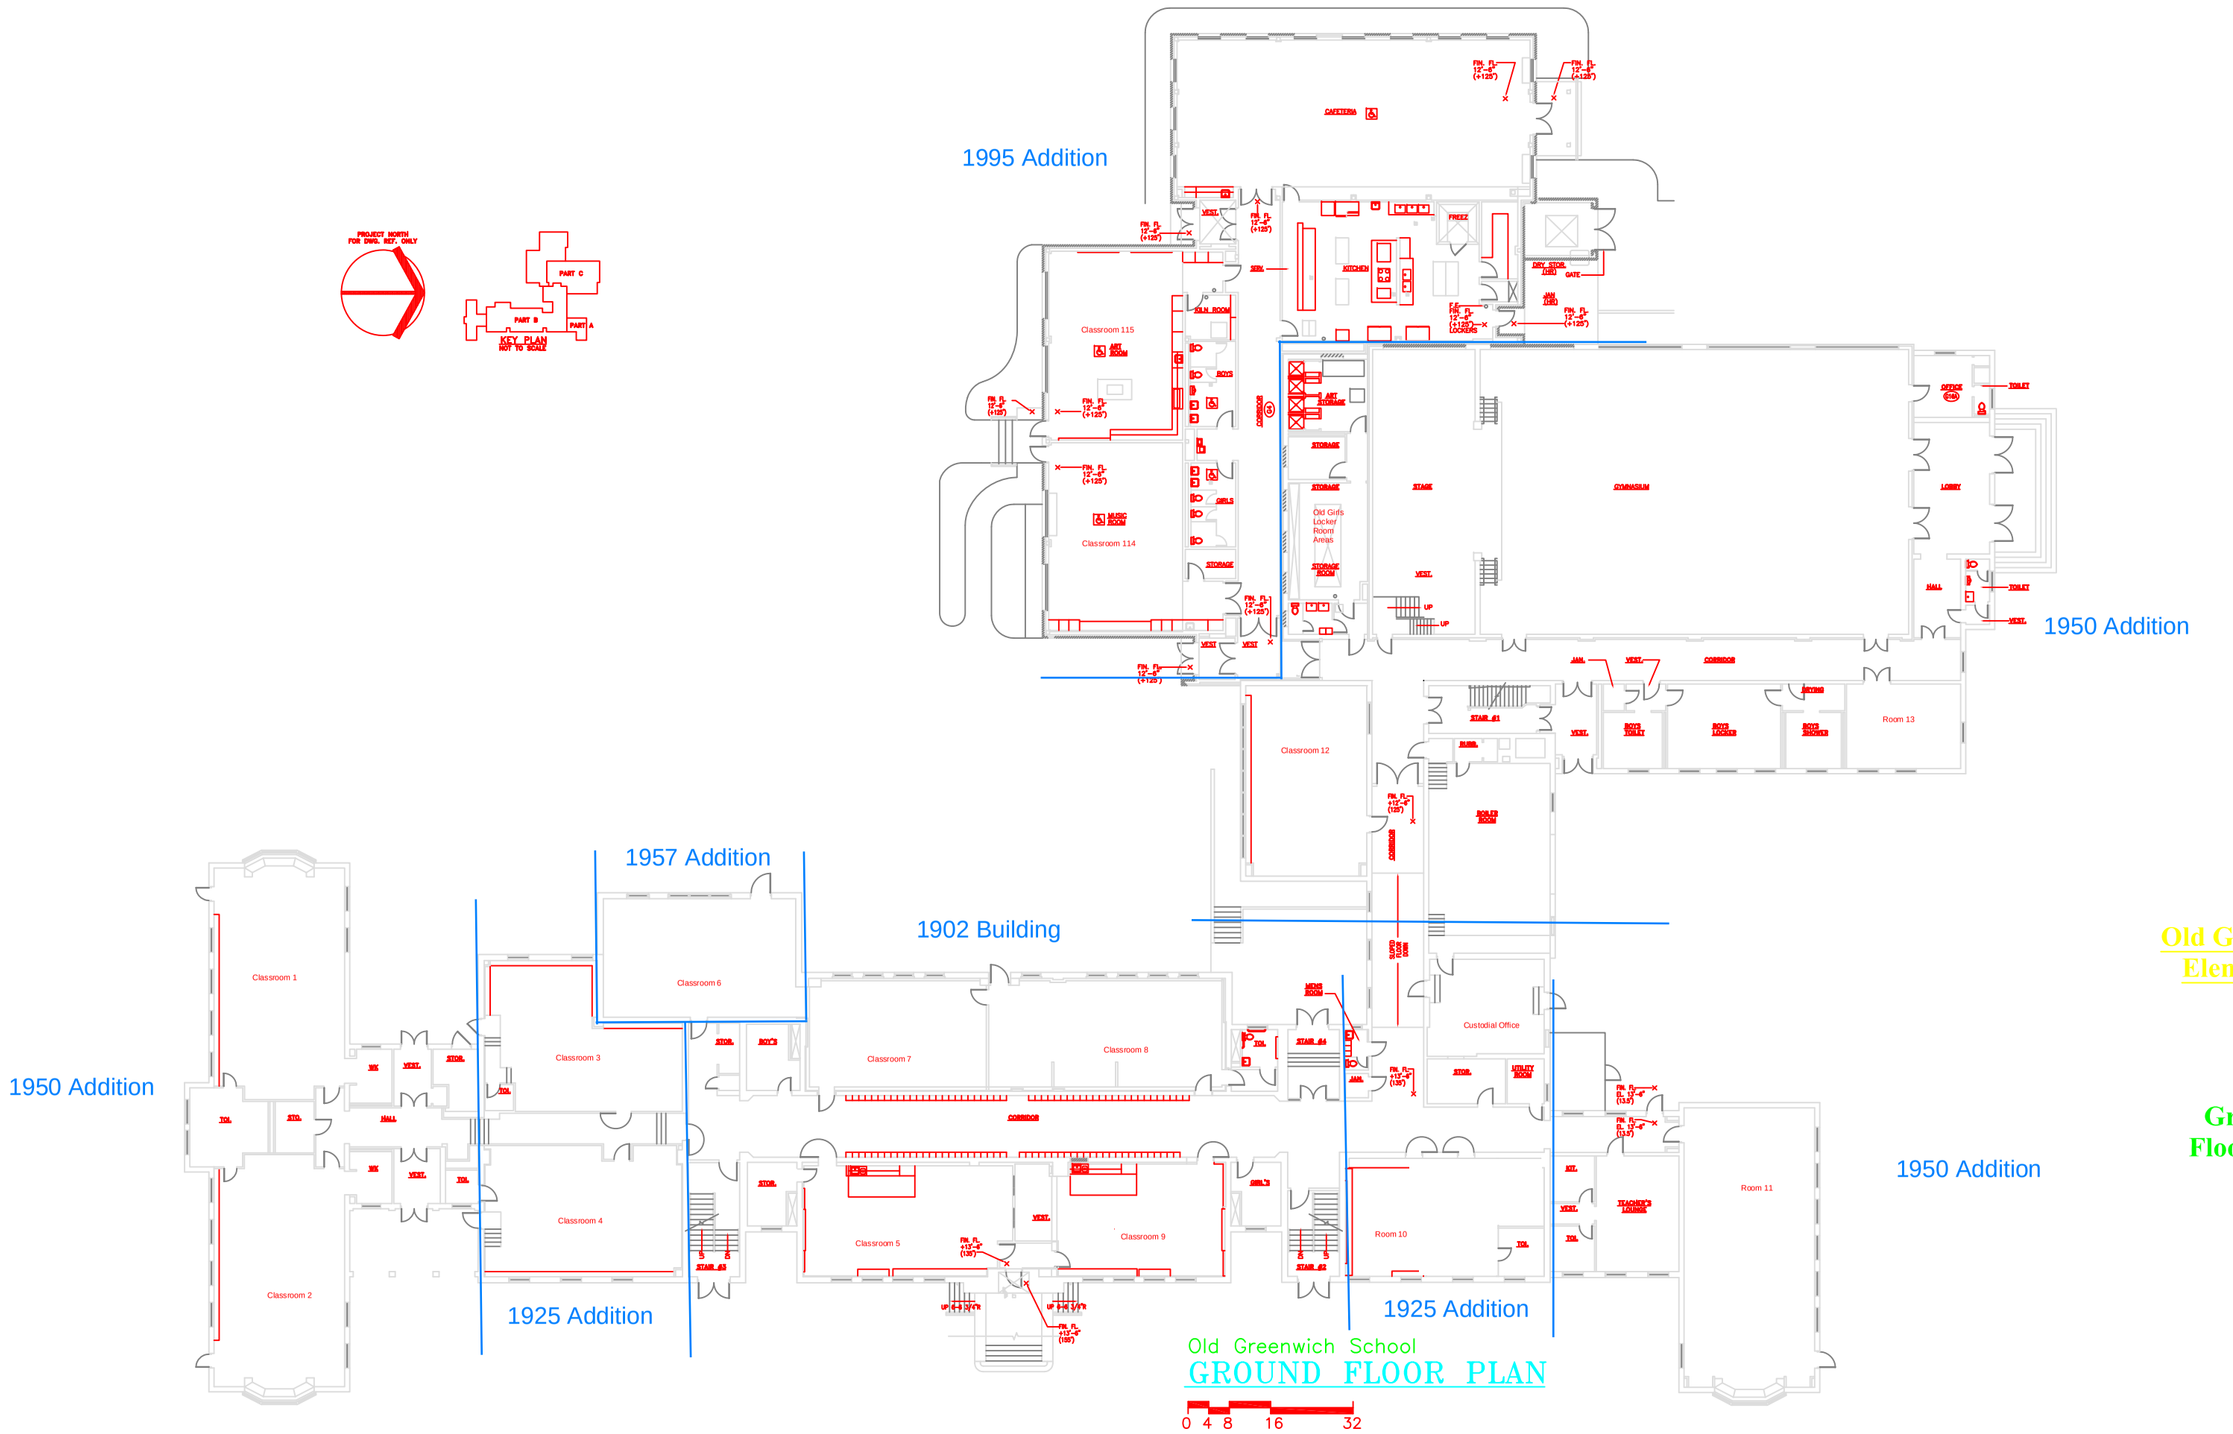

Old Greenwich Elementary

Ground Floor Plan

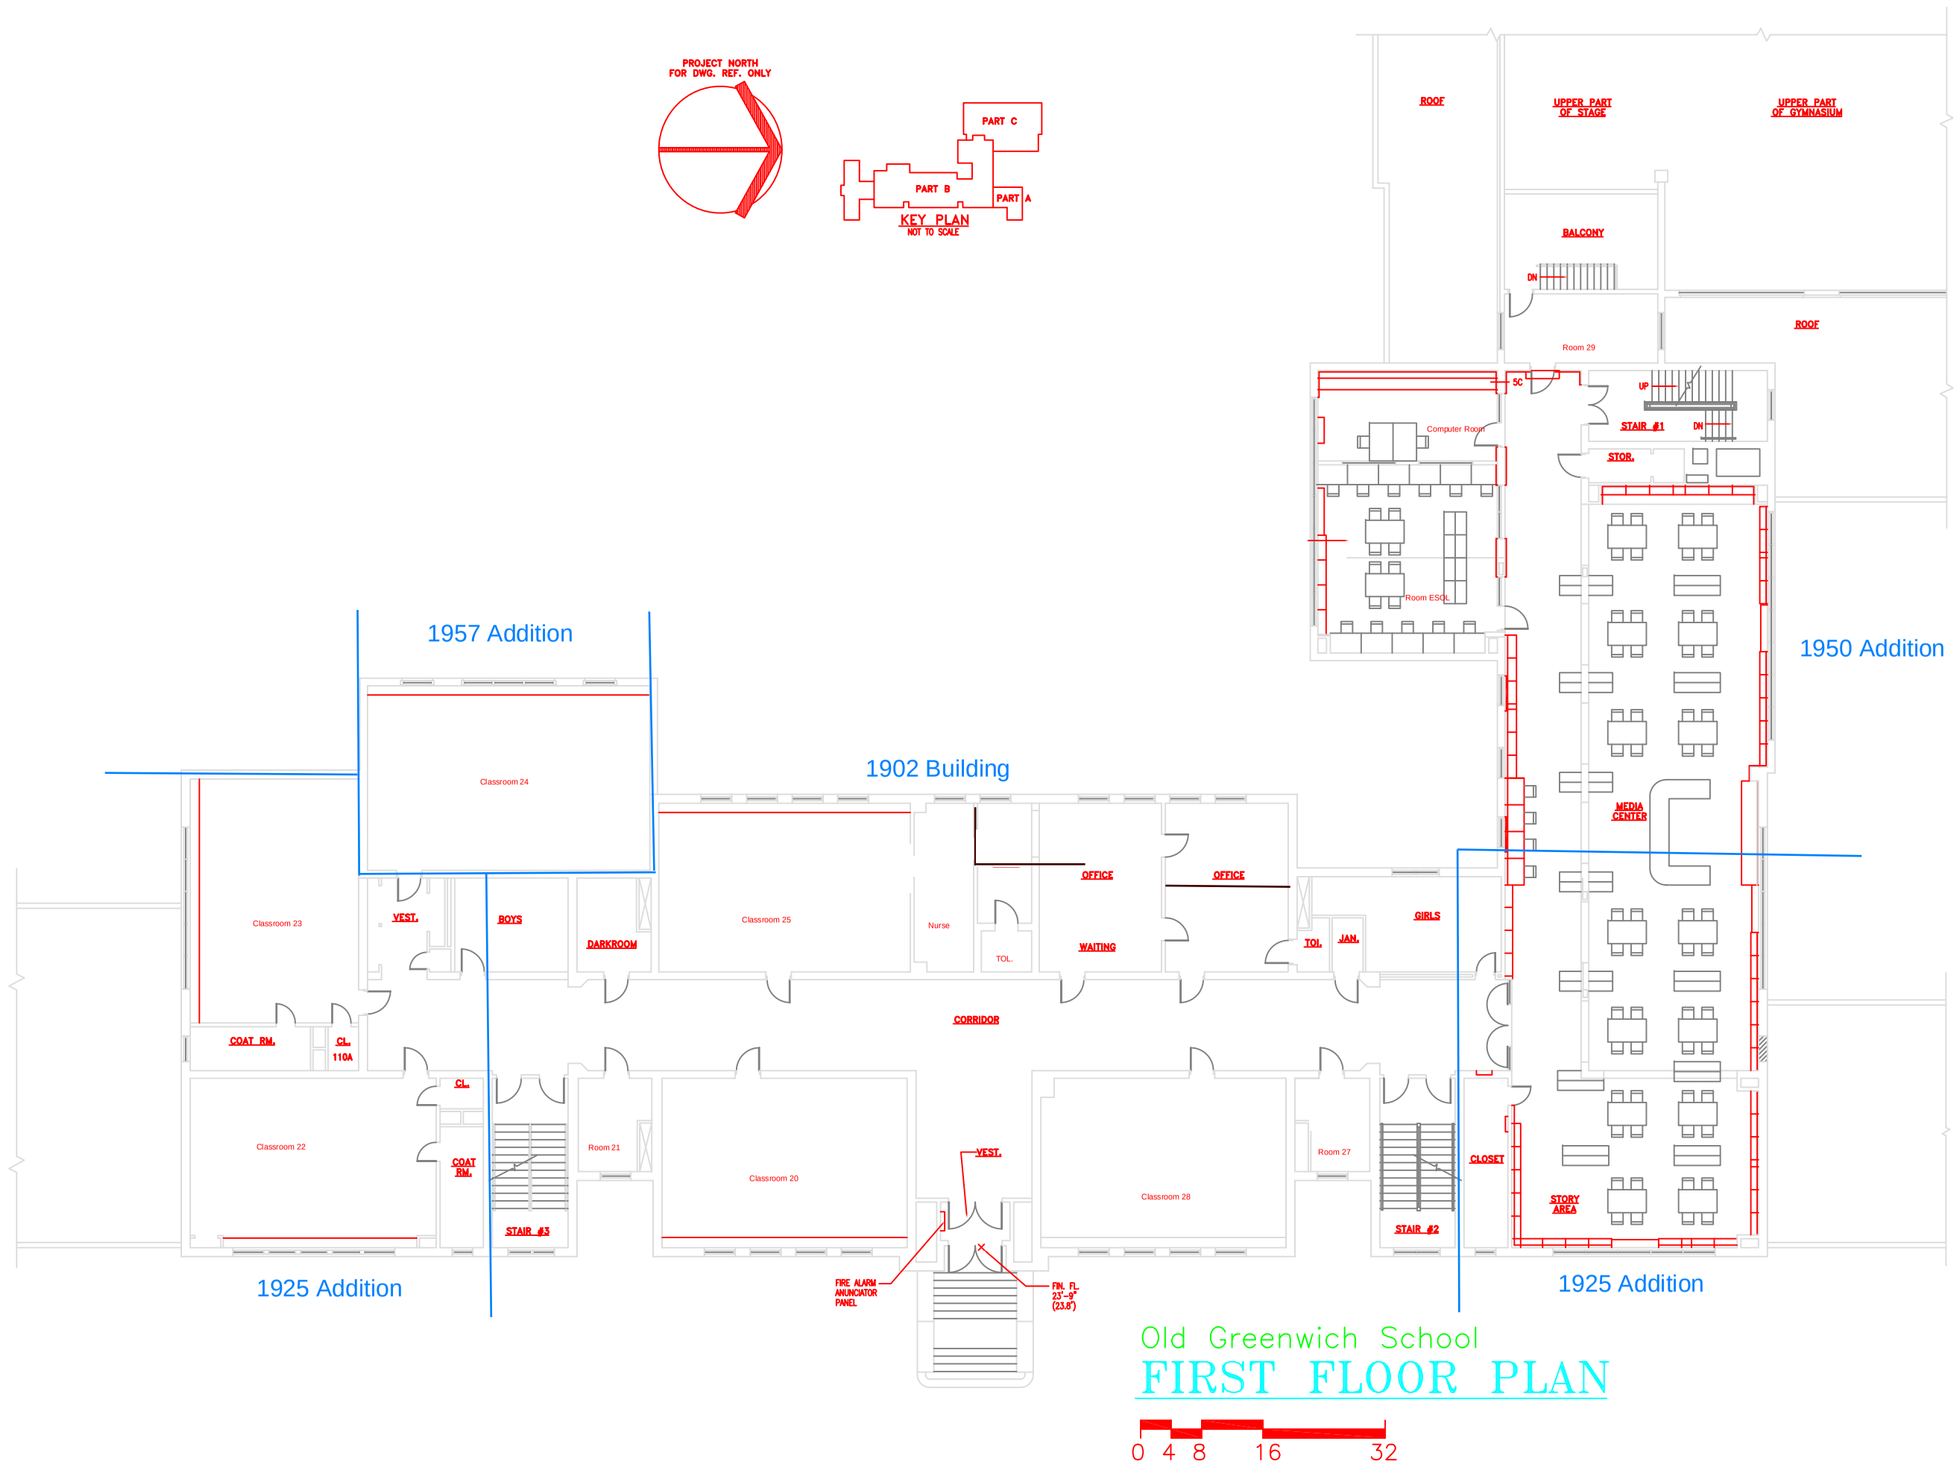

Old Greenwich Elementary

First Floor Plan

ATTIC FLOOR PLAN–PART B

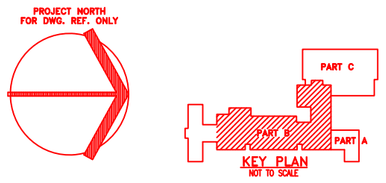

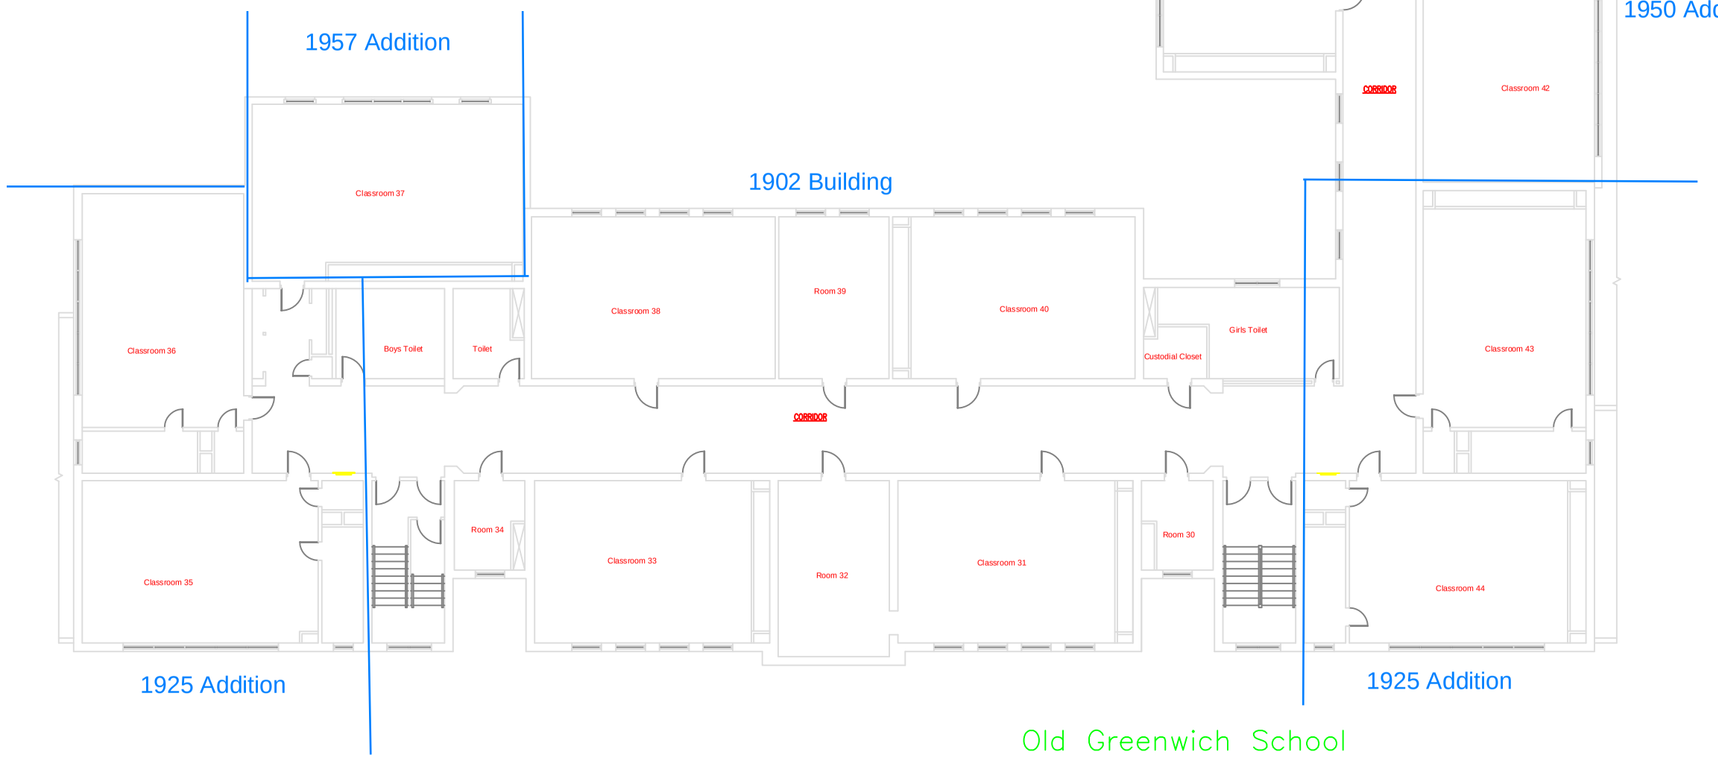

Old Greenwich School

SECOND FLOOR PLAN

0 4 8 16 32

Old Greenwich Elementary

Attic and Second Floor Plan

Appendix D

Langan Certifications and Accreditations

SIGNATURE COMMISSIONER

STATE OF CONNECTICUT
DEPARTMENT OF PUBLIC HEALTH

PURSUANT TO THE PROVISIONS OF THE GENERAL STATUTES OF CONNECTICUT

THE INDIVIDUAL NAMED BELOW IS CERTIFIED
BY THIS DEPARTMENT AS A

ASBESTOS CONSULTANT-INSPECTOR

WILLIE L. THOMPSON

CERTIFICATE NO.
000673

CURRENT THROUGH
08/31/23

VALIDATION NO.
03-965048

SIGNATURE COMMISSIONER

INSTRUCTIONS:

1. Detach and sign each of the cards on this form
2. Display the large card in a prominent place in your office or place of business.
3. The wallet card is for you to carry on your person. If you do not wish to carry the wallet card, place it in a secure place.
4. The employer's copy is for persons who must demonstrate current licensure/certification in order to retain employment or privileges. The employer's card is to be presented to the employer and kept by them as a part of your personnel file. Only one copy of this card can be supplied to you.

WALLET CARD

STATE OF CONNECTICUT
DEPARTMENT OF PUBLIC HEALTH

NAME
WILLIE L. THOMPSON

VALIDATION NO.	CERTIFICATE NO.	CURRENT THROUGH
03-965048	000673	08/31/23

PROFESSION
ASBESTOS CONSULTANT-INSPECTOR

SIGNATURE COMMISSIONER

ATC GROUP SERVICES LLC

104 East 25th Street, New York, NY 10010
(212) 353-8280

This certifies that

Willie L Thompson III

has successfully completed the

4-hour EPA-AHERA/ASHARA Training, accredited under TSCA Title II 40 CFR 763, and the New York State Department of Health Approved Course and Examination for

Asbestos Site Inspector Refresher

on

January 10, 2023

**** Please note that the official record of successful completion is the DOH 2832 Certificate of Asbestos Safety Training****

Course Location: **Online Course**

Certificate#: **NYS - RHIIIR – 23177**

Examination Date: **January 10, 2023**

Expiration Date: **January 10, 2024**

Signed: _____

John P. Springston, CIH, CSP, FAIHA

1004697 SP 0964 C01-P04703-I

RYAN M MURPHY
605 PLYMOUTH COLONY
BRANFORD CT 06405

Dear RYAN M MURPHY,

Attached you will find your validated certificate for the coming year. Should you have any questions about your certificate renewal, please do not hesitate to write or call:

Department of Public Health
P.O. Box 340308
M.S.#12MQA
Hartford, CT 06134-0308

(860) 509-7603
oplc.dph@ct.gov
www.ct.gov/dph/license

Sincerely,

MANISHA JUTHANI, MD, COMMISSIONER
DEPARTMENT OF PUBLIC HEALTH

1004697-0004710-0000001 of 0000001-C01-aid00101-0964-04703

EMPLOYER'S COPY

STATE OF CONNECTICUT
DEPARTMENT OF PUBLIC HEALTH

NAME
RYAN M MURPHY

VALIDATION NO.	CERTIFICATE NO.	CURRENT THROUGH
03-958154	000937	04/30/23

PROFESSION
ASBESTOS CONSULTANT-INSPECTOR

SIGNATURE COMMISSIONER

STATE OF CONNECTICUT
DEPARTMENT OF PUBLIC HEALTH

PURSUANT TO THE PROVISIONS OF THE GENERAL STATUTES OF CONNECTICUT

THE INDIVIDUAL NAMED BELOW IS CERTIFIED
BY THIS DEPARTMENT AS A
ASBESTOS CONSULTANT-INSPECTOR

RYAN M MURPHY

CERTIFICATE NO.
000937

CURRENT THROUGH
04/30/23

VALIDATION NO.
03-958154

SIGNATURE COMMISSIONER

INSTRUCTIONS:

1. Detach and sign each of the cards on this form
2. Display the large card in a prominent place in your office or place of business.
3. The wallet card is for you to carry on your person. If you do not wish to carry the wallet card, place it in a secure place.
4. The employer's copy is for persons who must demonstrate current licensure/certification in order to retain employment or privileges. The employer's card is to be presented to the employer and kept by them as a part of your personnel file. Only one copy of this card can be supplied to you.

WALLET CARD

STATE OF CONNECTICUT
DEPARTMENT OF PUBLIC HEALTH

NAME
RYAN M MURPHY

VALIDATION NO.	CERTIFICATE NO.	CURRENT THROUGH
03-958154	000937	04/30/23

PROFESSION
ASBESTOS CONSULTANT-INSPECTOR

SIGNATURE COMMISSIONER

CERTIFICATE OF ACHIEVEMENT

This certifies that

Ryan Murphy

has successfully completed the

4 Hour Asbestos Site Inspector Refresher Training
Asbestos Accreditation Under TSCA Title II
40 CFR Part 763

Training held via a Live Webinar

Score: 88%

conducted by:
ATC Group Services LLC dba ATLAS Technical
73 William Franks Drive
West Springfield, MA 01089
(413) 781-0070

Gregory J. Morsch

Principal Instructor: Gregory Morsch

Gregory J. Morsch

Regional Training Director: Gregory Morsch

January 19, 2023
Date of Course

SIAR - 7345
Certificate Number

January 19, 2024
Expiration Date

January 19, 2023
Examination Date

STATE OF CONNECTICUT

DEPARTMENT OF PUBLIC HEALTH

PURSUANT TO THE PROVISIONS OF THE GENERAL STATUTES OF CONNECTICUT

THE INDIVIDUAL NAMED BELOW IS CERTIFIED
BY THIS DEPARTMENT AS A

ASBESTOS CONSULTANT-INSP/MGMT PLANNER

MATTHEW A. MYERS

CERTIFICATE NO.
000041

CURRENT THROUGH
04/30/24

VALIDATION NO.
03-034250

SIGNATURE

COMMISSIONER

MATTHEW A MYERS
10 LEWIS ST
MILFORD, CT 06460-6333

Dear Certified Professional: This is your validated certificate for the coming year. Should you have any questions about your certificate, please email oplc.dph@ct.gov.

Department of Public Health
P.O. Box 340308
Hartford, CT 06134-0308
ct.gov/dph/license

Sincerely,

Manisha Juthani, MD
Commissioner

EMPLOYER'S COPY

STATE OF CONNECTICUT
DEPARTMENT OF PUBLIC HEALTH

NAME
MATTHEW A. MYERS

VALIDATION NO.	CERTIFICATE NO.	CURRENT THROUGH
20500892	191	04/30/2024

PROFESSION
Lead Inspector Risk Assessor
ACTIVE

SIGNATURE COMMISSIONER

STATE OF CONNECTICUT
DEPARTMENT OF PUBLIC HEALTH

THE INDIVIDUAL NAMED BELOW IS CERTIFIED BY THIS DEPARTMENT AS A
Lead Inspector Risk Assessor
ACTIVE

MATTHEW A. MYERS

CERTIFICATE NO.
191
CURRENT THROUGH
04/30/2024
VALIDATION NO.
20500892

SIGNATURE COMMISSIONER

INSTRUCTIONS:

1. Detach and sign each of the cards on this form
2. Display the large card in a prominent place in your office or place of business.
3. The wallet card is for you to carry on your person. If you do not wish to carry the wallet card, place it in a secure place.
4. The employer's copy is for persons who must demonstrate current licensure/certification in order to retain employment or privileges. The employer's card is to be presented to the employer and kept by them as a part of your personnel file. Only one copy of this card can be supplied to you.

WALLET CARD

STATE OF CONNECTICUT
DEPARTMENT OF PUBLIC HEALTH

NAME
MATTHEW A. MYERS

VALIDATION NO.	CERTIFICATE NO.	CURRENT THROUGH
20500892	191	04/30/2024

PROFESSION
Lead Inspector Risk Assessor
ACTIVE

SIGNATURE COMMISSIONER

© 2021 Great Papers

QuES&T

Quality Environmental Solutions & Technologies, Inc.
1376 Route 9, Wappingers Falls, NY 12590
Phone (845) 298-6031 Fax (845) 298-6251

HEREBY CERTIFIES THAT

MATTHEW A. MYERS

HAS SUCCESSFULLY COMPLETED A TRAINING SEMINAR IN:

NYS/EPA INSPECTOR REFRESHER

MEETING THE REQUIREMENTS OF NYSDOH 10 NYCRR, PART 73 AND TSCA TITLE II AND HAS BEEN AWARDED THIS CERTIFICATE BY:

Michael J. O'Rourke

MICHAEL O'ROURKE
TRAINING DIRECTOR

NOTE: Official record of successful completion is DOH 2832 Certificate of Completion of Asbestos Safety Training

NOTE: DOH 2832 - A $20 fee shall be charged for replacement of Certificate of Completion DOH 2832

ON THIS DATE:7/20/2022

CERTIFICATE NUMBER:911276

EXPIRATION DATE: 7/20/2023

© 2021 Great Papers

QuES&T

Quality Environmental Solutions & Technologies, Inc.
1376 Route 9, Wappingers Falls, NY 12590
Phone (845) 298-6031 Fax (845) 298-6251

HEREBY CERTIFIES THAT

MATTHEW MYERS

HAS SUCCESSFULLY COMPLETED A TRAINING SEMINAR IN:

NYS/EPA INSPECTOR REFRESHER

MEETING THE REQUIREMENTS OF NYSDOH 10 NYCRR, PART 73 AND TSCA TITLE II AND HAS BEEN AWARDED THIS CERTIFICATE BY:

MICHAEL O'ROURKE
TRAINING DIRECTOR

NOTE: Official record of successful completion is DOH 2832 Certificate of Completion of Asbestos Safety Training

NOTE: DOH 2832 - A $20 fee shall be charged for replacement of Certificate of Completion DOH 2832

ON THIS DATE:06/07/2023

CERTIFICATE NUMBER:931528

EXPIRATION DATE: 06/07/2024

CERT#: L-600-Virtual.1270

CHEMSCOPE TRAINING DIVISION

LEAD INSPECTOR/RISK ASSESSOR REFRESHER
8-HOUR TRAINING CERTIFICATE

Matthew A. Myers

10 Lewis Street, Milford CT

Has attended an 8-hour course on the subject discipline on

12/09/2022 and has passed a written examination.

The above individual has successfully completed the above training course approved in accordance with the Department of Public Health Standards established pursuant to Section 20-477 of the Connecticut General Statutes.

Course topics include all required topics of State of Connecticut DPH and EPA.

Under civil and criminal penalties of law for the making or submission of false or fraudulent statements or representations (U.S.C. 1001 and 15 U.S. C. 2615), I certify that this training complies with all applicable requirements of Title IV of TSCA, 40 CFR part 745 and any other applicable Federal, State or local requirements.

Examination Score: 98%
Exam Date: 12/09/2022
Expiration Date: 12/09/2023

Daniel Sullivan
Training Manager

Chem Scope, Inc.
15 Moulthrop Street
North Haven CT 06473
Phone: 203.865.5605
www.chem-scope.com

© GOES 340

Litho in U.S.A.

State of Connecticut

Lookup Detail View

Name

Name
PAVEL ZAYENCHIK

License Information

lookup

License Type	License Number	Expiration Date	Granted Date	License Name	License Status		Licensure Actions or Pending Charges
Lead Inspector Risk Assessor	2262	10/31/2023	08/04/2015	PAVEL ZAYENCHIK	ACTIVE	CURRENT	None

Generated on: 10/25/2022 9:44:01 AM

State of Connecticut

Lookup Detail View

Name

Name
PAVEL ZAYENCHIK

License Information

lookup

License Type	License Number	Expiration Date	Granted Date	License Name	License Status		Licensure Actions or Pending Charges
Lead Inspector Risk Assessor	2262	10/31/2023	08/04/2015	PAVEL ZAYENCHIK	ACTIVE	CURRENT	None

Generated on: 10/25/2022 9:44:01 AM

CERT#: L-600-Virtual.1262

CHEMSCOPE TRAINING DIVISION

LEAD INSPECTOR/RISK ASSESSOR REFRESHER

8-HOUR TRAINING CERTIFICATE

Pavel Zayenchik

125 Tunxis Village, Farmington CT

Has attended an 8-hour course on the subject discipline on

10/13/2022 and has passed a written examination.

The above individual has successfully completed the above training course approved in accordance with the Department of Public Health Standards established pursuant to Section 20-477 of the Connecticut General Statutes.

Course topics include all required topics of State of Connecticut DPH and EPA.

Under civil and criminal penalties of law for the making or submission of false or fraudulent statements or representations (U.S.C. 1001 and 15 U.S. C. 2615), I certify that this training complies with all applicable requirements of Title IV of TSCA, 40 CFR part 745 and any other applicable Federal, State or local requirements.

Examination Score: 96%
Exam Date: 10/13/2022
Expiration Date: 10/13/2023

Daniel Sullivan
Training Manager

Chem Scope, Inc.
15 Moulthrop Street
North Haven CT 06473
Phone: 203.865.5605
www.chem-scope.com

© GOES 340

Litho in U.S.A.

CERT#: L-600-Virtual.1262

CHEMSCOPE TRAINING DIVISION

LEAD INSPECTOR/RISK ASSESSOR REFRESHER

8-HOUR TRAINING CERTIFICATE

Pavel Zayenchik

125 Tunxis Village, Farmington CT

Has attended an 8-hour course on the subject discipline on

10/13/2022 and has passed a written examination.

The above individual has successfully completed the above training course approved in accordance with the Department of Public Health Standards established pursuant to Section 20-477 of the Connecticut General Statutes.

Course topics include all required topics of State of Connecticut DPH and EPA.

Under civil and criminal penalties of law for the making or submission of false or fraudulent statements or representations (U.S.C. 1001 and 15 U.S. C. 2615), I certify that this training complies with all applicable requirements of Title IV of TSCA, 40 CFR part 745 and any other applicable Federal, State or local requirements.

Examination Score: 96%
Exam Date: 10/13/2022
Expiration Date: 10/13/2023

Daniel Sullivan
Training Manager

Chem Scope, Inc.
15 Moulthrop Street
North Haven CT 06473
Phone: 203.865.5605
www.chem-scope.com

© GOES 340

Litho in U.S.A.