



953 W. Beecher Street
Adrian, Michigan 49221
(517) 263-5025
FAX (517) 263-1430

PLUMBING /HEATING /AIR CONDITIONING /INDUSTRIAL PIPING

7Litchfield Schools
210 Williams Street
Litchfield, MI 49252

June 10, 2024

Reference: Kitchen Equipment Replacement

Scope Of Work: Range/ Oven

- (Qty 1) Demo existing range/oven
- (Qty 1) Install new Royal Range 6 burner gas range/oven
 - Double oven
 - 24" griddle top
 - Piezo ignition (non standing pilot)
 - 6 heavy duty casters
 - 2 year parts & labor warranty
- (Qty 1) Reuse existing gas, modify if necessary
- (Qty 1) Start up and test operation




Quoted Price of: **Thirteen Thousand Two Hundred Eighty One & (00/100)-----\$13,281.00**

Note: This proposal may be withdrawn by us if not accepted within thirty days. All material is guaranteed to be as specified. All work to be completed in a workmanlike manner according to standard practices. Any alterations involving extra costs will be executed only upon written orders, and will become an extra charge over and above the estimate. All agreements contingent upon strikes, accidents or delays beyond our control. Owner to carry fire, tornado and other necessary insurance.

PLUMBING / HEATING / AIR CONDITIONING / INDUSTRIAL PIPING

Scope Of Work: Hot Food Serving Counter

- (Qty 1) Demo existing serving counter
- (Qty 1) Cap existing gas line
- (Qty 1) Install new Duke electric steam table
 - 4 stainless steel sealed heat wells w/ drains
 - Thermostatic control
 - 7" x 60" wide cutting board
 - Includes fold down food shield
- (Qty1) Install new 208v 3ph electrical to new unit
- (Qty 1) Start up and test operation

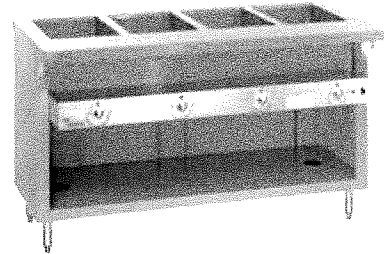

Quoted Price of: **Twelve Thousand Nine Hundred Fifty & (00/100)-----\$12,950.00**

Scope Of Work: Cold Food Serving Counter


- (Qty 1) Demo existing serving counter
- (Qty 1) Install new Duke electric cooling counter
 - 3 stainless steel sealed cold wells w/ drains
 - Thermostatic control
- (Qty1) Install new 120v 1ph electrical to new unit
- (Qty 1) Start up and test operation



Quoted Price of: **Twelve Thousand Seven Hundred Ninety Three & (00/100)-----\$12,793.00**

Scope Of Work: Dish Machine

- (Qty 1) Demo existing dish machine
- (Qty 1) Install new CMA dish machine
 - High temp sanitizing
 - 60 racks per hour
 - Booster heater
 - 208v 3ph
- (Qty 1) Tie into existing domestic water piping
- (Qty 1) tie into existing sanitary piping
- (Qty 1) Start up and test operation




Quoted Price of: **Fifteen Thousand Nine Hundred Twelve & (00/100)-----\$15,912.00**

Note: This proposal may be withdrawn by us if not accepted within thirty days. All material is guaranteed to be as specified. All work to be completed in a workmanlike manner according to standard practices. Any alterations involving extra costs will be executed only upon written orders, and will become an extra charge over and above the estimate. All agreements contingent upon strikes, accidents or delays beyond our control. Owner to carry fire, tornado and other necessary insurance.

PLUMBING / HEATING / AIR CONDITIONING / INDUSTRIAL PIPING

Scope Of Work: Oven


- (Qty 1) Demo existing oven
- (Qty 1) Install new Royal Range 5 rack oven
 - Natural gas
 - Temperature range 150-500 degF
 - Dual door w/ glass viewing window
 - 4 heavy duty casters
 - 2 year parts & labor warranty
- (Qty 1) Reuse existing gas, modify if necessary
- (Qty1) Start up and test operation



Quoted Price of: **Seven Thousand One Hundred Seventy Five & (00/100)-----\$7,175.00**

Scope Of Work: Faucets

- (Qty 1) Demo existing faucets
- (Qty 1) Install new T&S Brass sprayer + faucet
- (Qty 1) Install new T&S Brass 2 handle faucet
- (Qty 4) Install new stop valves
- (Qty 2) Clean up plumbing; add isolation valves

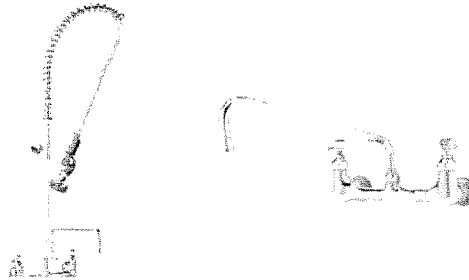

Quoted Price of: **Two Thousand Three Hundred Twenty Eight & (00/100)-----\$2,328.00**

Scope Of Work: Garbage Disposal

- (Qty 1) Demo existing garbage disposal
- (Qty 1) Install new In-sink-erator SS-100 1HP disposal
- (Qty 1) Install new flange adaptor
- (Qty 1) Install new electrical whip
- (Qty 1) Start up and test operation



Quoted Price of: **Three Thousand Seven Hundred Twelve & (00/100)-----\$3,712.00**

Note: This proposal may be withdrawn by us if not accepted within thirty days. All material is guaranteed to be as specified. All work to be completed in a workmanlike manner according to standard practices. Any alterations involving extra costs will be executed only upon written orders, and will become an extra charge over and above the estimate. All agreements contingent upon strikes, accidents or delays beyond our control. Owner to carry fire, tornado and other necessary insurance.