


| TEST                             | UNIT                 | SPECIFICATIONS |
|----------------------------------|----------------------|----------------|
| Linear Density - Denier Mono*    | Denier               | 10,800         |
| Linear Density - Denier Tape*    | Denier               | 5,000          |
| Thickness - Mono**               | Microns              | 300            |
| Thickness - Tape**               | Microns              | 100            |
| Break Strength - Mono***         | lbs/force            | 20             |
| Break Strength - Tape***         | lbs/force            | 12             |
| Elongation - Mono & Tape         | %                    | > 30           |
| Total Lead Content - Mono & Tape | ppm                  | < 100          |
| Total Product Weight****         | oz / yd <sup>2</sup> | 74             |
| Pile Yarn Fiber Weight**         | oz / yd <sup>2</sup> | 46             |
| Primary Backing Weight**         | oz / yd <sup>2</sup> | 8              |
| Secondary Backing Weight†        | oz / yd <sup>2</sup> | 20             |
| Average Pile Height**            | inches               | 2.0            |
| Average Tuft Bind Strength       | lb / force           | > 10           |
| Tufting Gauge                    | inches               | 1/2            |
| Average Grab Tear Strength       | lb / force           | > 200          |
| g-Max                            |                      | < 120          |
| Pill Flammability                |                      | Pass           |
| Infiltrometer (Drainage)         | in / hr              | > 25           |

Except where noted as a minimum or maximum, the above specifications are nominal.

\* All values are ± 8% \*\* All values are ± 5% \*\*\* All values are ± 25% \*\*\*\* All values are ± 10% † All values are ± 3 oz

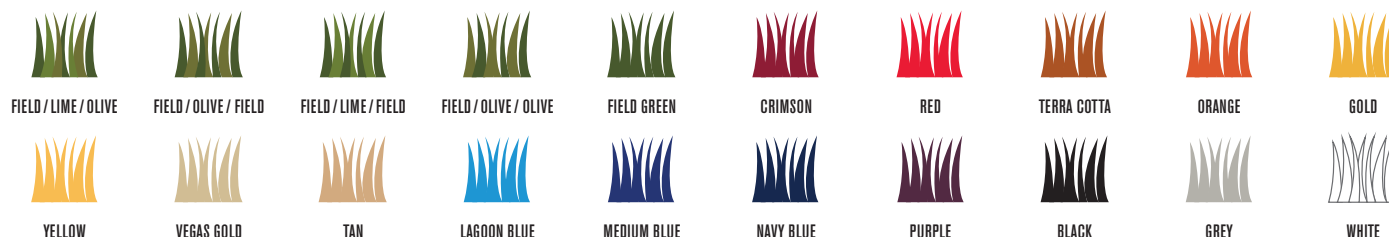

The colors shown are not intended for exact matching purposes, please refer to actual sample swatches for accurate hues.