

# CECIL COUNTY PUBLIC SCHOOLS PURCHASING DEPARTMENT

GEORGE WASHINGTON CARVER EDUCATION LEADERSHIP CENTER 201 BOOTH STREET • ELKTON, MD 21921

phone: 410.996.5429 • fax: 410.996.1081 • www.ccps.org

Jeffrey A. Lawson, Ed.D. Superintendent of Schools

Diana B. Hawley President, Board of Education

September 19,2024

# CCPS RFP#25-04 – NORTHEAST MIDDLE/HIGH SCHOOL REPLACEMENT PROJECT

#### **ADDENDUM #8**

(Previous Addendums 1-6 were issued in original RFP#24-15 and included in the 06A rebid issued bid documents)

This addendum is to address Bid RFIS and contract drawings, and specification modifications as noted below. Proposers and related parties will be responsible for reading and understanding all documents, the scope of work, addenda and all related solicitation documents issued. These documents will become attached to and part of the solicitation and award of bid contract.

ITEM No. 1 Bid RFIs responses.

ITEM No. 2 **CONTRACT DRAWINGS AND SPECIFICATIONS- Changes and Clarifications dated 09/18/2024.** 

Authorized Signature/Date:
Printed Name/Title:
Contractor Name:
Address:

\*Note: Bidder must sign and submit Addenda with the proposal submission. The same person signing the Addenda acknowledgement(s) must sign the Bid Form.

NEMHS 06A RE-BID - SUBMITTED RFIs LOG									
RFI#	Date recvd	Question	Answer	Date Answered					
1	9/12/2024	Please provide a final revised door schedule that clealy identifies / notes all STC ratings for all applicable door openings.	Refer to Addendum #5	9/18/2024					
2	9/12/2024	Please advise what Window Types are to be in the north corner of Room F104 on Sheet A101F.	Refer to Addendum #8	9/18/2024					
3	9/12/2024	Please advise the door number at the unmarked opening on the opposite side of the wall between Doors D120E and D121C on Sheet A101E.	Refer to Addendum #8	9/18/2024					
4	9/12/2024	Please advise the door number at the room to the left of Room G303 on Sheet A103G	Refer to Addendum #8	9/18/2024					
5	9/12/2024	Please advise if pull plates are required at Hardware Set 220.	Pull plates required. Refer to Addendum #8	9/18/2024					
6	9/12/2024	Doors A12A & A12B are not fire rated. Please advise that a panic rated exit device can be quoted in lieu of a fire rated exit device	No	9/18/2024					
7	9/12/2024	Please confirm all Greenhouse scopes of work per Spec 133413 / 06A Scope Package Greenhouse Scope Items / all associates scopes of work indicated on Drwg A906 / all other associates greenhouse scopes of work noted in bid docs are no longer applicable to this project and are to be strictly excluded from 06A base bid scope of work	Correct	9/18/2024					
8	9/12/2024	Please confirm the Front Canopy (Pergola) indicated on L502 including all associated scopes of work for this Front Canopy are no longer applicable to this project and are to be strictly excluded from 06A base bid scope of work	Correct	9/18/2024					
9	9/12/2024	Please confirm 06A is to exclude all scopes of work entirely associated with the Pre-K Rm C021 from their base bid 06A scope package	As noted in 01 23 00 - Alternates, Alternate Bid No. 3 for the Pre-K Room is not required for the 06A re-bid	9/18/2024					
10	9/12/2024	Please confirm if 23A responsible for providing temp water hook ups to CM office trailer for temp sanitary facility 🗈 If so, If so, please clarify whether or not 06A would still be responsible for providing CM Office Trailer 100 Gal Flush Water Tank service	23A contractor to provide connections to the office trailer. 6A contractor is responsible for providing the 100 Gal Flush Water tank.	9/18/2024					
11	9/12/2024	Please verify if 06A responsible for providing 250 gal Waste sanitary holding tank for CM office trailer	6A is responsible	9/18/2024					
12	9/12/2024	Please confirm 06A not responsible for providing port a pottys for all constractors for duration of project.	6A contractor is responsible for providing portable toilets for all contractors for the duration of the project.	9/18/2024					
13	9/12/2024	Please provide further details regarding the required 06A Temp Facility Scope Item #1 "waste disposal services" is to be inclusive of	6A responsible for providing dumpsters for general waste from all contractors for entire duration of project	9/18/2024					
14	9/12/2024	Please confirm 06A is not responsible for any Spec 055320 stair nosings scopes of work & that 05A will supply / 03A will install all stair nosing scopes of work	3A contractor to furnish and install all stair nosing at the exterior. 5A contractor to furnish stair nosing in metal pan stairs and concrete stairs for installation by the 3A contractor. 6A contractor to furnish and install any wood stair nosings. If it is a metal nosing in a wood stair, 5A contractor to furnish and 6A contractor to install	9/18/2024					
15	9/12/2024	Can 06A full time onsite superintendent act as the "supervisor" of the CM Clean Up Crew each week	This is acceptable as long as project is cleaned thoroughly and meets HESS' standards for safety/cleanliness	9/18/2024					
16	9/12/2024	The rebid form notes this project to be completed in 2 phases, however the preliminary construction schedule notes the construction of the new school to be completed as 1 phase. Please confirm that the entire 06A scope package will be completed within a 1 Phase project	Work to be put in place from the 06A scope will be completed during Phase 1, however, 06A contractor will still need to provide the general conditions/requirements through the completion of Phase 2 (temporary toilets, dumpsters, tanks for office trailer, site fencing, site cleanup, punchout, etc.)	9/18/2024					
17	9/12/2024	Please confirm project is to only be 1 shift & also that 06A is not responsile for providing 2nd shift clean up crew supervisor / 2 laborers each week	Yes to 1st part. The additional 2 laborers will act as foreman under the supervisor to direct laborers provided by the other trades per the General Scope section "Clean Up" Item 2.  A 2nd shift clean up crew will not be required.	9/18/2024					
18	9/12/2024	Please verify if 06A or 26A is responsible for supply & install of power supplies / wiring for electrified door hardware	The power supplies for the electric door hardware are to be furnished by the 06A Contractor, and installed/wired by the 26A Contractor	9/18/2024					

North East High School 6A Rebid RFI log 10f6

	I	NEMHS 06A RE-BID - SUBMITTED RFIS L							
RFI # Date recvo		Question	Answer	Date Answered					
19	9/12/2024	Please clarify whether 06A or 07A is responsible for Spec 075423 TPO reoofing for all "Entry Canopies" noted on the A105 Roof Plan Drawing as indicated per Drwg A432 Details A5 & D5	7A contractor owns TPO at the entry canopies	9/18/2024					
20	9/12/2024	Please confirm that spec 107310 Protective Covers is not applicable for the Entry Canopies noted on Drwg A105 per referenced Drwg A432 Detail A5 & D5, moreover confirm that Spec 107310 Protective Covers is only applicable for the Protective Covers noted on Drwg A105 per the referenced Drwg A431 Detail E15.							
21	9/12/2024	Please clarify if 06A or 23A is responsible for supply / install of Spec 089119 Architectural Louvers.	All architectural louvers as specified under 08 91 19 and louvers within wood doors are by 06A Contractor. All Mechanical louvers specified under Division 23 are by the 23A Contractor	9/18/2024					
22	9/12/2024	Please confirm 23A is responsible for providing all Mechanical Louvers.	Covered by 23A	9/18/2024					
23	9/12/2024	Please advise if an alternate OSHA / MOSH compliant roof fall protection system would be acceptable in lieu of the specified Guardian Roof Parapet Guardrail Fall Protection System noted in 06A Scope Package "Fall Protection" Scope Item #5.	No specific manufacturer/model required. Contractor can choose the product as long as it complies with OSHA / MOSH requirements. Scope line item to be revised	9/18/2024					
24	9/12/2024	Please confirm 06A is responsible for providing crews for (2) Saturdays each month for duration of project within their base bid. If so, please confirm that 06A will only be responsible for providing a crew for these 2 2 Saturday Shifts each month when 06A has personnel working on site that week.	Confirmed	9/18/2024					
25	9/12/2024	Please advise if an alternate temp protection material can be used as an approved substitution for the ¾" plywood concrete stair tread temp protection that is to be tapconned to the new concrete stair treads. If no alternate tread protection is allowed, then please advise if 06A will be responsible for patching all tapcon screw holes in new concrete stair treads upon removal of ¾" plywood stair tread protection.	6A is responsible for patching all tpcon screw holes in new concrete stair treads	9/18/2024					
26	9/12/2024	Please confirm at concrete SOG diamonds, 03A is responsible for covering the openings upon completing SOG placement and 05A Contractor will remove covers & shall be responsible to provide safety measures until ready for the 03A Contractor to infill.	3A is responsible for protection the diamonds. Diamonds not to be poured until approved by 5A contractor.	9/18/2024					
27	9/12/2024	Please confirm, the 05A Contractor shall provide safety cabling At SOD edges. Such that 06A will only be responsible for temp removing safety cabeling & providing OSHA compliant safety measures required in order to complete 06A scopes of work only.	Confirmed	9/18/2024					
28	9/12/2024	Please advise if 06A will be responsible for providing any temp exterior security enclosures at any exterior door openings with lockable temp doors?	Any temporary security enclosures at door openings will be constructured of plywood and 2x's and secured with lock/chain	9/18/2024					
29	9/12/2024	Please advise if 06A is responsible for any temp enclosures above & beyond the temp opening protection quantities specified in 06A scope package Temp Facilities Scope Item 5a-c. If so, please provide further clarification on extent of any other applicable temp enclosure scopes of work 06A will be responsible for.	Please provide temporary protection as described in scope items 5a-c under the Temporary Facilities scope section.	9/18/2024					
30	9/12/2024	Please clarify whether 23A or 06A will be responsible for providing temp HVAC equipment to ensure acceptable temp & humidity levels required for 06A installation of wood flooring scopes of work.	23A is responsible for providing temporary heating/cooling/dehumidification measures for the entire building. For the wood flooring installation, 6A is responsible for bringing temperature and humidity into acceptable ranges.	9/18/2024					
31	9/12/2024	Please clarify if owner or 06A will be responsible for providing the following testing / inspection services -concrete SOG moisture & humidity testing required for applicable 06A flooring scopes -alkalinity & Adhesion testing required for applicable 06A flooring scopes -Walkway Auditor dynamic & static coefficient of friction testing for applicable 06A flooring scopes	As noted in various specification sections withinn Division 9, 6A contractor is responsible for moisture, humidity, alkalinity, and adhesion testing for applicable 6A flooring scopes. As noted in 033546.23 - Concrete Floor Enhancement, 6A contractor is responsible for providing a Walkway Auditor and for conducting coefficient of friction testing.	9/18/2024					
32	9/12/2024	Please advise if there is any acceptable alternate basis of design manufacturers to the Spec 097253 Basis of Design Altro Puraguard wall covering WP-1 scope of work.	Refer to Addendum #8 for alternative manufacturer.	9/18/2024					
33	9/12/2024	Please provide further specifications / basis of designs for the Spec 033546.23 Concrete Floor Enhancement Part 2.3 Finishing Equipment products that are to be provided to the owner	Equipment required to perform the work is contractor decision.	9/18/2024					

North East High School 6A Rebid RFI log 2 of 6

	I	NEMHS 06A RE-BID - SUBMITTED RFIs L		D. L.						
RFI#	Date recvd	Question	Answer	Date Answered						
34	9/12/2024	Please provide further specifications / basis of designs for the Spec 096510 Hybrid Resilient Flooring Part 2.7 Maintenance Equipment package that is to be provided to the owner	Requirment has been removed . Refer to Addendum #8	9/18/2024						
35	9/12/2024	Concrete Floor Enhancement Part 2.3 Finishing Equipment products that are to be provided to the owner	This appears to be a duplicate. See RFI 33.	9/18/2024						
36	9/12/2024	Please clarify whether craft paper or plywood temp protection is required for temp protection of new Wood Flooring & Resilient Athletic Flooring systems.  06A scope package notes craft paper, but Flooring Spec sections note plywood temp protection  The specification sections indicate that floor protection is to be based on the type of construction activities that may occur on finished floor. Scope line item to be updated.								
37	Please advise if Spec 102623.11 Product 2.4 Fiberglass Core Decoration Protection Panels is applicable to this project. No note of this protection panel is indicated on the drawings. If it is applicable & to be provided by 06A then please advise on drawings / details where this scope is noted.  Please advise if Spec 102623.11 Product 2.4 Fiberglass Core Decoration 10 26 23.11 contractor has option of providing system as listed under 2.3 Engineered stone cor panels and (BOD) or 2.4 Fiberglass core panels. Panels are listed in drawings as WP-1, WP-3 and WP-4									
38	9/12/2024	Please clarify if 06A can provide more than (1) approved manufacturer for Ceiling Types APC-1, APC-2, APC-3, APC-4 – OR – will 06A be required to provide the same single manufacturer for all (4) ceiling types APC-1:4 (i.e. can 06A provide Armstrong for APC-1 & USG for APC-2???)	Single manufacturer is required.	9/18/2024						
39	9/12/2024	Does USG Halcyon Eco Acoustical Panel #97312&97313 meet basis of design requirements per Spec 095113 Part 2.2 & 2.3 basis of design requirements for Ceiling Type APC-3&4	Substitution request for this product complying with Division 1 of the specifications can be made after bid acceptance.	9/18/2024						
40	9/12/2024	Please provide further specifications / detail drawings / clarifications regarding the CMU wall prep required for Spec 097200 – Part 2.3.B  40.1.Please provide spec for Portland cement plaster material & also advise on installation method required, particularly if metal lath substrate will be required prior to applying skim coat to CMU  40.2.This plaster skim coat could be at least ½" thick, thus once the wall covering is installed on the plaster skim coat, there could be ½" – ½" thick edge on any exposed edges of wall covering that don't directly abut a corner or end wall / floor / ceiling • Please advise if there is a required edge trim that is required to be installed on the exposed edges of the wallcovering / plaster skim coat.	40.1 plaster and installation requirements are as required by and acceptable to the selected wall covering manufacturer 40.2 Edge trim will be required. Refer to Addendum #8	9/18/2024						
41	9/12/2024	Please provide further details on layout / pattern of RSF-1A & RSF-1B flooring indicated in HS Cafeteria B001 indicated on Drwg A810A	Refer to Addendum #8	9/18/2024						
42	9/12/2024	See below snapshot of current A304 finish schedule which only notes general floor type (i.e. CPT, RTF)Please provide revised Finish Schedule on Drwg A304 that provides correct Finish Tags/#s (i.e. CPT-1, CPT-2, RFT-1, RFT-4, etc) & not just general flooring type.	Refer to A305 and floor pattern floor plans for locations of use of various cpt types.	9/18/2024						
43	9/12/2024	Room Finish Schedule notes wall tile CT on all walls for all toilet / lavatories / restrooms / bathrooms, however Typ Toilet Room Detail L15 / A501 only indicates wall tile on wet walls. Please clarify if CT tile is to be on wet walls only OR on all walls in all applicable restrooms / bathrooms. If CT wall tile to be on all toilet rooms walls please advise if Typ Detail L15 / A501 should be used for all walls & not just wet walls in all toilet / BR / restrooms.	Information on documents is consistent. Refer to remark note 11 on sheet A304. Detail L15/A501 is applicable to wet walls in all toilet rooms. Refer to Addendum #8	9/18/2024						
44	9/12/2024	Please advise if typ wall tile accents indicated in Detail L15 / A501 is for all toilet / lavatory rms / bathrooms / restrooms OR only for Event Lavatories, HS dining Toilets, MS Academic Wing Toilets, & HS Wing Toilet rooms	Detail is applicable to all toilet rooms.	9/18/2024						
45	9/12/2024	45.Please confirm 06A's Spec 024119 demo scope of work is only inclusive of the demo scopes of work noted on Drwg A901 Field House Demo Plan A16.  Moreover, please clarify if 06A will be responsible for the following field house scopes of work listed below  -Concrete SOG cutting & patching -Removal / disposal of existing MEP rough ins noted to be demoed (cut / cap / make safe by 23A & 26A) -Demo / removal / disposal of existing MEP fixtures / equipment / rough ins indicated on Drwgs P402, M401, E902	Confirmed	9/18/2024						
46	9/12/2024	Please confirm 06A not responsible for temp signage for temp fencing around perimeter of project/ misc site temp signage.	Temporary perimeter fencing and perimeter signage is by 31A contractor. All other temporary project signage is by the 6A contractor	9/18/2024						
47	9/12/2024	Please verify if 06A is responsible for supplying / installing the Temp Facilities items noted in 06A Scope Package temp facilities Scope Item #2	6A is responsible	9/18/2024						

North East High School 6A Rebid RFI log 3 of 6

		NEMHS 06A RE-BID - SUBMITTED RFIS L		Data					
RFI#	Date recvd	Question	Answer	Date Answered					
	1	les de la company de la compan	I	0/10/0001					
48	9/12/2024	Please advise on how many mobilizations will be required for phasing / completiong of all fireproofing / intumescent paint scopes of work	As noted in Item 9 of the 00 General Work Scope, multiple mobilizations may be required and are included.	9/18/2024					
49	9/12/2024	Please confirm 03A is responsible for supplying & installation / maintenance of temp fall protection at elevated slab perimeters & that 06A is only responsible for temp removal & reinstall of 03A provided temp fall protection only as required for 06A to complete their scopes of work							
50	9/12/2024	Please advise if 04A or 06A will be responsible for parging / plaster skim coating of 04A CMU walls for required substrate prep for Spec 097200 Wall covering scopes of work at applicable locations.							
51	9/12/2024	Please advise on applicable locations where 04A masonry walls cannot extend to deck & 06A will be responsible for providing topping out with metal framed drywall partitions to deck. And or please advise on an allowance quantity that 06A should include within their base bid scope for this scope of work.	LF alloance added to 06A scope. Refer to Addendum 8	9/18/2024					
52	9/12/2024	Please clarify if 05A or 06A will be responsible for providing MOSH comliant temp handrails at steel pan stairs	5A is responsible	9/18/2024					
53	9/12/2024	Please confirm 05A not 06A will provide & maintain all MOSH compliant safety rails at slab edges, stairwells, slab openings, roof openings, elevator openings, edge of deck at roof level & penthouse.	At concrete SOG diamonds, the 03A Contractor shall cover the openings upon completing SOG placement. The 05A Contractor will remove covers, and shall be responsible to provide safety measures until ready for the 03A Contractor to infill. At SOD edges, the 05A Contractor shall provide safety cabling. If/when the 03A, 04A, and/or 06A Contractor requires the safety cables to be removed in order to install their work, The contractor working the edge of SOD condition is responsible to install safety measures necessary to maintain OSHA compliance.	9/18/2024					
54	9/12/2024	Please confirm 05A not 06A responsible for providing safety rails at roof openings	At concrete SOG diamonds, the 03A Contractor shall cover the openings upon completing SOG placement. The 05A Contractor will remove covers, and shall be responsible to provide safety measures until ready for the 03A Contractor to infill. At SOD edges, the 05A Contractor shall provide safety cabling. If/when the 03A, 04A, and/or 06A Contractor requires the safety cables to be removed in order to install their work, The contractor working the edge of SOD condition is responsible to install safety measures necessary to maintain OSHA compliance.	9/18/2024					
55	9/12/2024	Please confirm 07A responsible for all Spec 075423 TPO Roofing scopes of work	Confirmed	9/18/2024					
56	9/12/2024	Per 08B scope package Scope Item #3, the CM shall furnish all hardware for entrances to 08B contractors systems for 08B to install & Final Keying for 08B hardware by CM. 06A Scope Package Door Scope Item #2 states 06A to provide all 08B alum door hardware. Please clarify if 06A or CM will be responsible for supplying of 08B door hardware / final keying.	See answer to RFI 64 below	9/18/2024					
57	9/12/2024	Backed Glass mirrors scopes of work in Weight Rooms, Aux Gym, fitness rm, Speech Rms, Vocal / Band rms, & dressing rm	08B	9/18/2024					
58	9/12/2024	Please confirm 23A not 06A is responsible for providing temp closures at louver openings & maintaining until 23A install of all louvers	Confirmed per 23A SOW item #16	9/18/2024					
59	9/12/2024	Please confirm 23A is responsible for providing all louvers including all architectural louvers except for louvers in HM & wood doors which will be provided by 06A	See Pre-RFI answer 21 above	9/18/2024					
60	9/12/2024	Per 23A Mechanical Scope Item #44, 23A will provide all temp water / sanitary services for CM trailer. Please confirm 06A not responsible for providing temp water / waste holding tanks for CM trailer.	06A is providing the water and wast tanks for CM office trailer per the 06A SOW "Temporary Facilities" item 1. 23A is only responsible for any hook ups.	9/18/2024					

North East High School 6A Rebid RFI log 4 of 6

		NEMHS 06A RE-BID - SUBMITTED RFIs L	og	
RFI#	Date recvd	Question	Answer	Date Answered
61	9/12/2024	Please clarify if all primes are responsible for providing brooms, sweeping compound, mops, vacuums, cans, etc required for the CM temp weekly clean up crew or if 06A will be solely responsible for providing all materials & equipment for the clean up crew.	each contractor is responsible for their own materials and equipment per 00 90 00 Clean Up Section item 2	9/18/2024
62	9/12/2024	Please provide a revised copy of Drwg A305. Current Drwg A305 is blurry and not legible.	Refer to Addendum #8	9/18/2024
63	9/13/2024	What part of 6A scope includes TPO roofing?	6A is to coordinate with 07A for blocking and parapet construction.	9/18/2024
64	9/13/2024	Please verify if 6A is to Furnish and deliver to the 8B contractor ALL hardware for Aluminum doors that are listed in the hardware schedule. This was mentioned in RFI#151 and want to be sure nothing has changed.	6A contractor is responsible	9/18/2024
65	9/13/2024	Is there a specific locksmith where 6A must purchase the permanent cores that are to be delivered to CCPS and installed by CCPS?	See specification 087100 Section 2.2 C and D for manufacturer of cylinder and cores. There is no specified locksmith.  All locksets will be furnished and installed with temporary construction cores. The permanent cores will be furnished by 06A Contractor per specification 087100, and sent directly from the hardware supplier (under 06A) to CCPS in-house specialist. The CCPS hardware specialist will remove the temporary construction cores and install the permanent cores	9/18/2024
66	9/13/2024	Please confirm that you want a Level 5 Drywall Finish EVERYWHERE as noted in the scope. This is a much more expensive finish than Level 4.	Specification 09 29 00 Part 3.7.D specfies Level finish levels. Scope item has been revised.	9/18/2024
67	9/13/2024	6A scope has us providing all power supplies for electric door hardware as called out in the hardware schedule. Refer to RFI#161. Please confirm.	The power supplies for the electric door hardware are to be furnished by the 06A Contractor, and installed/wired by the 26A Contractor	9/18/2024
68	9/13/2024	Have original alternates 2,3,4,5 been eliminated from the project? Or have they been incorporated into the base bid? They are no longer on our bid form, but we still see the Greenhouse spec which as included in Alt #2.	Refer to section 01 23 00 and bid form of this solicitation's bid documents for Alternates not required. Alternates have not been incorporated into the project.	9/18/2024
69	9/13/2024	Please clarify what work 6A is to coordinate with spec 079100 Preformed Joint Seals.	To ensure any CMU block fill, primer, etc that is in your scope is compatablie with the performed joint seals and sealant furnished/installed by 04A contractor	9/18/2024
70	9/13/2024	Please confirm metal strapping can be used in lieu of FRT plywood for in-wall blocking for wall hung items.	Provide blocking as per specifications	9/18/2024
71	9/13/2024	Discrepancy between Ceramic Tile Designations:  • Detail L15 on sheet A501 specifies that ceramic tile is only to be placed on wet walls.  • Sheet A304 (e.g., Rooms B004 – 4a & 5), however, shows "CT" (Ceramic Tile) on all walls.  • Question: Which sheet takes precedence, and should ceramic tile be installed on all walls or only the wet walls?	applicable to wet walls in all toilet rooms. Refer	9/18/2024
72	9/13/2024	Resinous Base Designation:  •Sheet A304 (e.g., Rooms B004-4A & 5) shows "Res" (Resinous) base on all walls, while the floors are indicated as PT.  •Question: Can you clarify if the resinous base applies to all walls in these rooms and if this base is consistent across the project?	Base type designation will be revised. Refer to addendum #8	9/18/2024
73	9/13/2024	Carpet Variations and Pricing:  •Room Designations (A501): A01 – B109 – B007 – C118 – F002 – F101 – F102 – F103 – G118 – G210 – G310 – ST09 all indicate "CPT" (Carpet).  •Sheet A305 lists 7 different types of carpets, which may have different price points.  •Question: Can you confirm if multiple carpet types are to be used within these rooms, and how should the selection or pricing be handled?	Refer to response to RFI #42	9/18/2024

North East High School 6A Rebid RFI log 5 of 6

		NEMHS 06A RE-BID - SUBMITTED RFIS	LOG	
RFI#	Date recvd	Question	Answer	Date Answered
74	9/13/2024	Missing Base Type:  •Rooms B017 through B020 on Sheet A304 specify RSF-2 as both the flooring material and the base material.  •However, Sheet A305 does not list a base type "RSF-2".  •Question: Is there a specific base material designation for RSF-2, or RSF-4.	Designation RS-4 will be revised to RS-2. Refer to Addendum #8	9/18/2024

North East High School 6A Rebid RFI log 6 of 6



September 18, 2024

PROJECT NAME North East Middle & High School
PSC # 07.044.23 / BTL
CCPS RFP#25-04
6A-REBID
PROJECT# GP22105.00
ADDENDUM #8

TO THE CONTRACT DRAWINGS AND SPECIFICATIONS FOR THE REFERENCED PROJECT, DATED 12/22/2023, AS PREPARED BY GRIMM & PARKER ARCHITECTS, 11720 BELTSVILLE DRIVE, SUITE 600, CALVERTON, MARYLAND 20705.

This Addendum includes changes and clarifications to the Contract Documents. The information includes the following:

# **SPECIFICATION ITEMS:**

ITEM NO. 01 SECTION 00 90 00 – PRIME BID PACKAGE SCOPES

**REPLACE** WORK SCOPE CATEGORY 06A – General Trades in its entirety

ITEM NO. 02 SECTION 00 01 10 - TABLE OF CONTENTS

**DELETE** 09 54 23 LINEAR METAL CEILINGS

ITEM NO. 03 SECTION 05 50 00 - METAL FABRICATIONS

**DELETE** Paragraph 1.1.0 in its entirety.

**DELETE** Subsection 2.17 in its entirety.

ITEM NO. 04 SECTION 08 71 00 – DOOR HARDWARE

**REVISE** Paragraph 3.7 HARDWARE SCHEDULE SET 220 to add:

1 Pull plate 1001-3(1/8") x 1194-3 (TB pull & conceal fasteners under push plate)

Trimco

ITEM NO. 05 SECTION 09 51 13 - ACOUSTICAL PANEL CEILINGS

**REVISE** Paragraph 2.1.A to read:

A. Source Limitations for Ceiling System: Obtain all acoustical ceiling panel types and their supporting suspension system from single manufacturer.

ITEM NO. 06 SECTION 09 54 23 - LINEAR METAL CEILINGS

**DELETE** Section in its entirety.

ITEM NO. 07 <u>SECTION 09 65 10 - HYBRID RESILIENT FLOORING (VCTT)</u>

**DELETE** Paragraph 2.7.B in its entirety.

ITEM NO. 08 SECTION 09 72 00 - WALL COVERINGS

**ADD** New paragraph 2.3.D to read:

D. Metal Termination Edge: Fry Reglet Wallcovering Trim Base and Termination WCTBT125-217, as manufactured by Fry Reglet or equal, shall be installed. Aluminum shall be extruded 6063 T5, with chemical conversion coating, clear anodized, or other specified finish.

# ITEM NO. 09 <u>SECTION 09 72 53 - SPECIAL WALL COVERINGS</u>

**ADD** New subsection 2.5 to read:

# 2.5 CONTRACTOR OPTION

- A. Contractor may provide the following special wall covering product instead of the product under subsections 2.1 and 2.2, with all accessories for complete installation; other requirements under this section apply to this Contractor Option system.

  PART 2 -
- Solid Surface Sheet: Prism Solid Surface Sheet by Inpro Corporation; solid surface material manufactured from polyester/acrylic blended resins with natural filler material. PART 3 -
  - Provide solid surface material that conforms to ANSI/ICPA SS-1 for workmanship and finish, structural integrity, and material characteristics.
  - 2. Fungal and Bacterial Resistance: Provide Prism™ Solid Surface that does not support fungal or bacterial growth as tested in accordance with ASTM G-21 and ASTM G-22.

- Fire Performance Characteristics: Provide Prism™ Solid Surface Sheet conforming with the NFPA class A fire rating as determined by ASTM E-84.
- Provide solid surface material that meets the emission level requirements of Greenguard certification, with results satisfying the chemical emissions requirement of California Section 1350.
- 5. Provide solid surface material that meets the requirements of Greenguard Children and School Chemical emissions level.
- 6. Sheet Thickness: 1/4-inch.
- 7. Provide all trims and accessories for complete installation.

# **DRAWING ITEMS:**

ITEM NO. A1 A101D - LEVEL 01 AREA D PARTIAL FLOOR PLAN

Revise sheet A101D per attached reissued sheet: **ADD** Add door tag D121B

ITEM NO. A2 A101F - LEVEL 01 AREA F PARTIAL FLOOR PLAN

Revise sheet A101F per attached reissued sheet:

**ADD** At room F104 add window frame tags.

ITEM NO. A3 <u>A103G - LEVEL 03 AREA G PARTIAL FLOOR PLAN</u>

Revise sheet A103G per attached reissued sheet:

**ADD** room tag "INTERVENTION/CAS F307.

**ADD** Door tag F307.

ITEM NO. A4 <u>A304 – FINISH SCHEDULE</u> Revise sheet A304 per attached reissued sheet:

**REVISE** Revision to base type at toilet rooms to PT **REVISE** Revision to flooring type at B007 MS CAFETERIA.

**REVISE** Revise APC-7 panel type.

ADD Add typical note 22 flooring coordination note

ITEM NO. A5 A305 – MATERIAL SCHEDULE

Revise sheet A305 per attached reissued sheet:

**REVISE** Revise resilient base RSF-4 to RSF-2.

**REVISE** Revise APC-7 panel type.

**DELETE** Delete HS dining from list of location at FLM-2B.

**DELETE** Delete PMP-1- perforated metal panel

**DELETE** Delete toilet rooms from list of rooms receiving resinous base.

NORTH EAST MIDDLE & HIGH SCHOOL 6A- Rebid -Addendum #8 Page 4

ITEM NO. A6 A501 TYPICAL TOILET ROOM PLANS AND ACCESSIBILITY DETAILS

Revise sheet A501 per attached reissued sheet:

ADD Add note to detail L15/A501 to read: TILE PATTERN IS APPLICABLE TO ALL

**RESTROOMS** 

ITEM NO. A7 A607 - INTERIOR ELEVATIONS

Revise sheet A607 per attached reissued sheet:

**DELETE** Delete mural and perforated decorative metal panel

ADD Add return Mechanical return air grille

ITEM NO. A8 <u>A701B - LEVEL 01 AREA B REFLECTED CEILING PLAN</u>

Revise sheet A701B per attached reissued sheet:

**REVISE** Revise note at APC-7 ceiling at dining.

ITEM NO. A9 <u>A800 - FURNITURE AND EQUIPMENT SCHEDULES</u>

Revise sheet A800 per attached reissued sheet:

**REVISE** Revise E8 Ice Machine manufacturer and product # to SCOTSMAN UC2024MA-1

ITEM NO. A10 A810A - LEVEL 00 FLOOR PATTERN PLAN

Revise sheet A810A per attached reissued sheet:

**ADD** Add floor pattern notes to clarify materials and types.

\*\*\*\*

# **WORK SCOPE CATEGORY 06A – General Trades**

The work of this bid category includes but is not limited to providing all labor, equipment, materials, scaffolding, hoisting and incidentals to complete all Concrete Floor Enhancements, Stair Nosings, Column Covers, Rough Carpentry, Drywall & ACT, Cubicles, Installation of Frames, Doors, Hardware, cold formed metal framing, fireproofing, expansion joints, counter doors, coiling doors, overhead doors, sectional doors, mirrors, louvers, and interior finishes, specialties, equipment, furnishings, greenhouse, elevator, Ceramic Tile, Wood Flooring, Resilient Flooring & Carpet, and wheelchair lift work in accordance with the specifications, drawings and applicable codes. All work is to be performed as shown on the plans and/or specified under the following technical sections:

TEMPORARY PROJECT SIGNAGE  24 119  SELECTIVE DEMOLITION (as it relates to this scope)  33 54 6.23  CONCRETE FLOOR ENHANCEMENT  51 200  STRUCTURAL STEEL FRAMING (for coordination purposes)  51 213  ARCHITECTURALLY EXPOSED STRUCTURAL STEEL FRAMING (for coordination purposes)  52 100  STEEL JOIST FRAMING (for coordination purposes)  53 100  STEEL JECKING (for coordination purposes)  54 000  COLD-FORMED METAL FRAMING  55 50 00  METAL FABRICATIONS (for coordination purposes)  55 113  METAL PAN STAIRS (for coordination purposes)  55 51 40  FABRICATED SPIRAL STAIRS (for coordination purposes)  55 52 13  PIPE AND TUBE RAILINGS (for coordination purposes)  55 52 13  PIPE AND TUBE RAILINGS (for coordination purposes)  55 53 20  STAIR NOSINGS (as it relates to this scope)  55 81 3  COLUMN COVERS  57 100  DECORATIVE METAL STAIRS (for coordination purposes)  56 10 53  MISCELLANEOUS ROUGH CARPENTRY  60 16 43  GYPSUM SHEATHING  71 800  TRAFFIC COATINGS  77 21 00  THERMAL INSULATION (as it relates to this scope)  77 22 6  FUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only)  77 42 13.19  INSULATED METAL WALL PANELS (for coordination purposes)  77 42 13.19  INSULATED METAL WALL PANELS (for coordination purposes)  77 42 13.23  METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes)  77 100  ROOF SPECIALTIES (for coordination purposes)  77 100  ROOF SPECIALTIES (for coordination purposes)  77 100  ROOF ACCESSORIES (for coordination purposes)  77 100  ROOF ACCESSORIES (for coordination purposes)  77 100  ROOF ACCESSORIES (for coordination purposes)  77 101  ROOF SPECIALTIES (for coordination purposes)  77 102  ROOF ACCESSORIES (for coordination purposes)  77 103  ROOF SPECIALTIES (tor coordination purposes)  77 104  ROOF SPECIALTIES (tor coordination purposes)  77 107  78 13  INTUMESCENT FIREPROOFING  78 13  INTUMESCENT FIREPROOFING  79 100  PREFORMED JOINT SEALANTS (as it relates to this scope)  79 210  JOINT SEALANTS (as it relates to this scope)  79 219  ACOUSTICAL JOINT SCALANTS (as it relates to this scope)  79	<u>SECTION</u>	NAME
02 41 19 SELECTIVE DEMOLITION (as it relates to this scope) 03 35 46.23 CONCRETE FLOOR ENHANCEMENT 05 12 00 STRUCTURAL STEEL FRAMING (for coordination purposes) 05 12 13 ARCHITECTURALLY EXPOSED STRUCTURAL STEEL FRAMING (for coordination purposes) 05 31 00 STEEL JOIST FRAMING (for coordination purposes) 05 31 00 STEEL DIST FRAMING (for coordination purposes) 05 40 00 COLD-FORMED METAL FRAMING 05 50 00 METAL FABRICATIONS (for coordination purposes) 05 51 13 METAL PAN STAIRS (for coordination purposes) 05 51 14 FABRICATED SPIRAL STAIRS (for coordination purposes) 05 52 13 PIPE AND TUBE RAILINGS (for coordination purposes) 05 52 13 PIPE AND TUBE RAILINGS (for coordination purposes) 05 53 20 STAIR NOSINGS (as it relates to this scope) 05 58 13 COLUMN COVERS 05 71 00 DECOARATIVE METAL STAIRS (for coordination purposes) 05 73 00 DECORATIVE METAL RAILINGS (for coordination purposes) 06 10 53 MISCELLANEOUS ROUGH CARPENTRY 06 16 43 GYPSUM SHEATHING 07 18 00 TRAFFIC COATINGS 07 21 00 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.13 METAL WALL PANELS (for coordination purposes) 07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes) 07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes) 07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes) 07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes) 07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes) 07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes) 07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes) 07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 10 COORDINATE OF SEPANSION JOINTS (For coordination purposes) 07 51 00 ROOF SPECIALTIES (for coordination purposes) 07 52 00 ROOF ACCESSORIES (for coordination purposes) 07 91 00 ROOF SPECIALTIES (for coordina		
O3 35 46.23 CONCRETE FLOOR ENHANCEMENT  55 12 00 STRUCTURAL STELL FRAMING (for coordination purposes) 05 12 13 ARCHITECTURALLY EXPOSED STRUCTURAL STEEL FRAMING (for coordination purposes) 05 21 00 STEEL JOIST FRAMING (for coordination purposes) 05 31 00 STEEL DECKING (for coordination purposes) 05 40 00 COLD-FORMED METAL FRAMING 05 50 00 METAL FABRICATIONS (for coordination purposes) 05 51 13 METAL PAN STAIRS (for coordination purposes) 05 51 14 FABRICATED SPIRAL STAIRS (for coordination purposes) 05 52 13 PIPE AND TUBE RAILINGS (for coordination purposes) 05 52 13 PIPE AND TUBE RAILINGS (for coordination purposes) 05 53 20 STAIR NOSINGS (as it relates to this scope) 05 58 13 COLUMN COVERS 05 71 00 DECORATIVE METAL STAIRS (for coordination purposes) 06 10 53 MISCELLANEOUS ROUGH CARPENTRY 06 16 43 GYPSUM SHEATHING 07 18 00 TRAFFIC COATINGS 07 21 100 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.13 METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 20 ROOF ACCESSORIES (for coordination purposes) 07 72 00 ROOF ACCESSORIES (for coordination purposes) 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope)		
05 12 00 STRUCTURAL STEEL FRAMING (for coordination purposes) 05 12 13 ARCHITECTURALLY EXPOSED STRUCTURAL STEEL FRAMING (for coordination purposes) 05 21 00 STEEL JOIST FRAMING (for coordination purposes) 05 31 00 STEEL DIST FRAMING (for coordination purposes) 05 31 00 COLD-FORMED METAL FRAMING 05 50 00 METAL FABRICATIONS (for coordination purposes) 05 50 00 METAL PAN STAIRS (for coordination purposes) 05 51 13 METAL PAN STAIRS (for coordination purposes) 05 51 40 FABRICATED SPIRAL STAIRS (for coordination purposes) 05 52 13 PIPE AND TUBE RAILINGS (for coordination purposes) 05 53 20 STAIR NOSINGS (as it relates to this scope) 05 58 13 COLUMN COVERS 05 71 00 DECOARATIVE METAL STAIRS (for coordination purposes) 05 73 00 DECORATIVE METAL STAIRS (for coordination purposes) 06 10 53 MISCELLANEOUS ROUGH CARPENTRY 06 16 43 GYPSUM SHEATHING 07 18 00 TRAFFIC COATINGS 07 21 00 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.13 METAL WALL PANELS (for coordination purposes) 07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes) 07 42 13.19 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 42 13.19 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 42 13.19 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 42 13.19 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 42 13.19 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 42 13.19 METAL FLASHING AND TRIM (for coordination purposes) 07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 60 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 71 20 0 ROOF ACCESSORIES (for coordination purposes) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 10 ACOUSTICAL JOINT SEALS (as it re		·
05 12 13 ARCHITECTURALLY EXPOSED STRUCTURAL STEEL FRAMING (for coordination purposes) 05 21 00 STEEL JOIST FRAMING (for coordination purposes) 05 31 00 STEEL DECKING (for coordination purposes) 05 40 00 COLD-FORMED METAL FRAMING 05 50 00 METAL FABRICATIONS (for coordination purposes) 05 51 13 METAL PAN STAIRS (for coordination purposes) 05 51 140 FABRICATED SPIRAL STAIRS (for coordination purposes) 05 52 13 PIPE AND TUBE RAILINGS (for coordination purposes) 05 53 20 STAIR NOSINGS (as it relates to this scope) 05 58 13 COLUMN COVERS 05 71 00 DECOARATIVE METAL STAIRS (for coordination purposes) 05 73 00 DECORATIVE METAL STAIRS (for coordination purposes) 06 10 53 MISCELLANEOUS ROUGH CARPENTRY 06 16 43 GYPSUM SHEATHING 07 18 00 TRAFFIC COATINGS 07 21 00 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes) 07 42 13.19 METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 42 13.24 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 12 20 ROOF ACCESSORIES (for coordination purposes) 07 12 21 31 INTUMESCENT FIREPROOFING 07 81 23 INTUMESCENT FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope)	05 12 00	
05 21 00 STEEL JOIST FRAMING (for coordination purposes) 05 31 00 STEEL DECKING (for coordination purposes) 05 30 00 COLD-FORMED METAL FRAMING 05 50 00 METAL FABRICATIONS (for coordination purposes) 05 51 13 METAL PAN STAIRS (for coordination purposes) 05 51 14 FABRICATED SPIRAL STAIRS (for coordination purposes) 05 52 13 PIPE AND TUBE RAILINGS (for coordination purposes) 05 52 13 PIPE AND TUBE RAILINGS (for coordination purposes) 05 53 20 STAIR NOSINGS (as it relates to this scope) 05 58 13 COLUMN COVERS 05 71 00 DECORATIVE METAL STAIRS (for coordination purposes) 05 73 00 DECORATIVE METAL STAIRS (for coordination purposes) 06 10 53 MISCELLANEOUS ROUGH CARPENTRY 06 16 43 GYPSUM SHEATHING 07 18 00 TRAFFIC COATINGS 07 21 00 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.13 METAL WALL PANELS (for coordination purposes) 07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes) 07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 31 31 INTUMESCENT FIREPROOFING 07 81 23 INTUMESCENT FIREPROOFING 07 81 24 INTUMESCENT FIREPROOFING 07 81 25 INTUMESCENT FIREPROOFING 07 81 26 INTUMESCENT FIREPROOFING 07 81 27 INTUMESCENT FIREPROOFING 07 81 28 INTUMESCENT FIREPROOFING 07 81 31 INTUMESCENT FIRE		
05 31 00 STEEL DECKING (for coordination purposes) 05 40 00 COLD-FORMED METAL FRAMING 05 50 00 METAL FABRICATIONS (for coordination purposes) 05 51 13 METAL PAN STAIRS (for coordination purposes) 05 51 40 FABRICATED SPIRAL STAIRS (for coordination purposes) 05 52 13 PIPE AND TUBE RAILINGS (for coordination purposes) 05 53 20 STAIR NOSINGS (as it relates to this scope) 05 58 13 COLUMN COVERS 05 71 00 DECOARATIVE METAL STAIRS (for coordination purposes) 05 73 00 DECORATIVE METAL STAIRS (for coordination purposes) 06 10 53 MISCELLANEOUS ROUGH CARPENTRY 06 16 43 GYPSUM SHEATHING 07 18 00 TRAFFIC COATINGS 07 21 00 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.13 METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 20 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 81 23 INTUMESCENT FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALANTS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALEANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALEANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALEANTS (as it relates to this scope)		
05 50 00 METAL FABRICATIONS (for coordination purposes) 05 51 13 METAL PAN STAIRS (for coordination purposes) 05 51 40 FABRICATED SPIRAL STAIRS (for coordination purposes) 05 52 13 PIPE AND TUBE RAILINGS (for coordination purposes) 05 53 20 STAIR NOSINGS (as it relates to this scope) 05 58 13 COLUMN COVERS 05 71 00 DECOARATIVE METAL STAIRS (for coordination purposes) 05 73 00 DECORATIVE METAL RAILINGS (for coordination purposes) 06 10 53 MISCELLANEOUS ROUGH CARPENTRY 06 16 43 GYPSUM SHEATHING 07 18 00 TRAFFIC COATINGS 07 21 00 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.13 METAL WALL PANELS (for coordination purposes) 07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes) 07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 81 12 INTUMESCENT FIREPROOFING 07 82 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT FIRESTOPPING (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 93 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	05 31 00	
05 51 13 METAL PAN STAIRS (for coordination purposes) 05 51 40 FABRICATED SPIRAL STAIRS (for coordination purposes) 05 52 13 PIPE AND TUBE RAILINGS (for coordination purposes) 05 53 20 STAIR NOSINGS (as it relates to this scope) 05 58 13 COLUMN COVERS 05 71 00 DECOARATIVE METAL STAIRS (for coordination purposes) 05 73 00 DECORATIVE METAL RAILINGS (for coordination purposes) 06 10 53 MISCELLANEOUS ROUGH CARPENTRY 06 16 43 GYPSUM SHEATHING 07 18 00 TRAFFIC COATINGS 07 21 00 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.13 METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes) 07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 72 00 ROOF ACCESSORIES (for coordination purposes) 07 72 00 ROOF ACCESSORIES (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope)	05 40 00	COLD-FORMED METAL FRAMING
05 51 40 FABRICATED SPIRAL STAIRS (for coordination purposes) 05 52 13 PIPE AND TUBE RAILINGS (for coordination purposes) 05 53 20 STAIR NOSINGS (as it relates to this scope) 05 58 13 COLUMN COVERS 05 71 00 DECOARATIVE METAL STAIRS (for coordination purposes) 05 73 00 DECORATIVE METAL RAILINGS (for coordination purposes) 06 10 53 MISCELLANEOUS ROUGH CARPENTRY 06 16 43 GYPSUM SHEATHING 07 18 00 TRAFFIC COATINGS 07 21 00 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.13 METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 72 00 ROOF SPECIALTIES (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 81 13 INTUMESCENT FIREPROOFING 07 81 23 INTUMESCENT FIREPROOFING 07 84 43 JOINT FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	05 50 00	METAL FABRICATIONS (for coordination purposes)
05 52 13 PIPE AND TUBE RAILINGS (for coordination purposes) 05 53 20 STAIR NOSINGS (as it relates to this scope) 05 58 13 COLUMN COVERS 05 71 00 DECOARATIVE METAL STAIRS (for coordination purposes) 05 73 00 DECORATIVE METAL RAILINGS (for coordination purposes) 06 10 53 MISCELLANEOUS ROUGH CARPENTRY 06 16 43 GYPSUM SHEATHING 07 18 00 TRAFFIC COATINGS 07 21 00 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.13 METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes) 07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 81 23 INTUMESCENT FIREPROOFING 07 84 43 PENETRATION FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 01 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	05 51 13	METAL PAN STAIRS (for coordination purposes)
05 53 20 STAIR NOSINGS (as it relates to this scope) 05 58 13 COLUMN COVERS 05 71 00 DECOARATIVE METAL STAIRS (for coordination purposes) 05 73 00 DECOARATIVE METAL STAIRS (for coordination purposes) 06 10 53 MISCELLANEOUS ROUGH CARPENTRY 06 16 43 GYPSUM SHEATHING 07 18 00 TRAFFIC COATINGS 07 21 00 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.13 METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes) 07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 81 13 INTUMESCENT FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 84 43 JOINT FIRESTOPPING (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	05 51 40	FABRICATED SPIRAL STAIRS (for coordination purposes)
05 58 13 COLUMN COVERS 05 71 00 DECOARATIVE METAL STAIRS (for coordination purposes) 05 73 00 DECOARATIVE METAL RAILINGS (for coordination purposes) 06 10 53 MISCELLANEOUS ROUGH CARPENTRY 06 16 43 GYPSUM SHEATHING 07 18 00 TRAFFIC COATINGS 07 21 00 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.13 METAL WALL PANELS (for coordination purposes) 07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes) 07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 72 00 ROOF ACCESSORIES (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 81 123 INTUMESCENT FIREPROOFING 07 84 43 JOINT FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALANTS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	05 52 13	PIPE AND TUBE RAILINGS (for coordination purposes)
05 71 00 DECOARATIVE METAL STAIRS (for coordination purposes) 05 73 00 DECORATIVE METAL RAILINGS (for coordination purposes) 06 10 53 MISCELLANEOUS ROUGH CARPENTRY 06 16 43 GYPSUM SHEATHING 07 18 00 TRAFFIC COATINGS 07 21 00 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.13 METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes) 07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 81 23 INTUMESCENT FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 84 43 JOINT FIRESTOPPING (as it relates to this scope) 07 92 00 PREFORMED JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	05 53 20	STAIR NOSINGS (as it relates to this scope)
DECORATIVE METAL RAILINGS (for coordination purposes)  06 10 53 MISCELLANEOUS ROUGH CARPENTRY  06 16 43 GYPSUM SHEATHING  07 18 00 TRAFFIC COATINGS  07 21 00 THERMAL INSULATION (as it relates to this scope)  07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only)  07 42 13.13 METAL WALL PANELS (for coordination purposes)  07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes)  07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes)  07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING  07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes)  07 71 00 ROOF SPECIALTIES (for coordination purposes)  07 72 00 ROOF ACCESSORIES (for coordination purposes)  07 81 00 APPLIED FIREPROOFING  07 81 23 INTUMESCENT FIREPROOFING  07 84 43 JOINT FIRESTOPPING (as it relates to this scope)  07 92 00 JOINT SEALANTS (as it relates to this scope)  07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope)  07 95 13 EXPANSION JOINT SCALANTES  08 11 13 HOLLOW METAL DOORS AND FRAMES	05 58 13	COLUMN COVERS
06 10 53 MISCELLANEOUS ROUGH CARPENTRY 06 16 43 GYPSUM SHEATHING 07 18 00 TRAFFIC COATINGS 07 21 00 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.13 METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes) 07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 72 00 ROOF ACCESSORIES (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 81 123 INTUMESCENT FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	05 71 00	DECOARATIVE METAL STAIRS (for coordination purposes)
06 16 43 GYPSUM SHEATHING 07 18 00 TRAFFIC COATINGS 07 21 00 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.13 METAL WALL PANELS (for coordination purposes) 07 42 13.29 INSULATED METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes) 07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 72 00 ROOF ACCESSORIES (for coordination purposes) 07 81 20 INTUMESCENT FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 84 43 JOINT FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	05 73 00	DECORATIVE METAL RAILINGS (for coordination purposes)
07 18 00 TRAFFIC COATINGS 07 21 00 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.13 METAL WALL PANELS (for coordination purposes)  07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes) 07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 72 00 ROOF ACCESSORIES (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 81 23 INTUMESCENT FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 84 43 JOINT FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	06 10 53	MISCELLANEOUS ROUGH CARPENTRY
07 21 00 THERMAL INSULATION (as it relates to this scope) 07 27 26 FLUID-APPLIED MEMBRANE AIR BARRIERS (for coordination only) 07 42 13.13 METAL WALL PANELS (for coordination purposes) 07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes) 07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 72 00 ROOF ACCESSORIES (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 81 23 INTUMESCENT FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	06 16 43	GYPSUM SHEATHING
07 27 26 07 42 13.13 METAL WALL PANELS (for coordination purposes)  07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes)  07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes)  07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 72 00 ROOF ACCESSORIES (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	07 18 00	TRAFFIC COATINGS
07 42 13.13 METAL WALL PANELS (for coordination purposes)  07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes)  07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes)  07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes)  07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING  07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes)  07 71 00 ROOF SPECIALTIES (for coordination purposes)  07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes)  07 72 00 ROOF ACCESSORIES (for coordination purposes)  07 81 00 APPLIED FIREPROOFING  07 81 23 INTUMESCENT FIREPROOFING  07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope)  07 91 00 PREFORMED JOINT SEALS (as it relates to this scope)  07 92 00 JOINT SEALANTS (as it relates to this scope)  07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope)  07 95 13 EXPANSION JOINT COVER ASSEMBLIES  08 11 13 HOLLOW METAL DOORS AND FRAMES	07 21 00	
07 42 13.19 INSULATED METAL WALL PANELS (for coordination purposes) 07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes) 07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 72 00 ROOF ACCESSORIES (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 81 23 INTUMESCENT FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	07 27 26	· · · · · · · · · · · · · · · · · · ·
07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes)  07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 72 00 ROOF ACCESSORIES (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 81 23 INTUMESCENT FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	07 42 13.13	METAL WALL PANELS (for coordination purposes)
07 42 13.23 METAL COMPOSITE MATERIAL WALL PANELS (for coordination purposes) 07 48 13 THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes)  07 54 23 THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING 07 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) 07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 72 00 ROOF ACCESSORIES (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 81 23 INTUMESCENT FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	07 42 13.19	INSULATED METAL WALL PANELS (for coordination purposes)
THERMAL BREAK CLADDING SUPPORT SYSTEM (for coordination purposes)  THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING SHEET METAL FLASHING AND TRIM (for coordination purposes) ROOF SPECIALTIES (for coordination purposes) MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) ROOF ACCESSORIES (for coordination purposes) ROOF ACCESSORIES (for coordination purposes) ROOF ACCESSORIES (for coordination purposes) INTUMESCENT FIREPROOFING ROOF 81 23 INTUMESCENT FIREPROOFING ROOF 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) ROOF 91 00 PREFORMED JOINT SEALS (as it relates to this scope) ROOF 92 100 JOINT SEALANTS (as it relates to this scope) ROOF 92 110 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) REPANSION JOINT COVER ASSEMBLIES ROOF SHEET METAL PURPOSES (AS IT ASSEMBLIES) ROOF SHEET METAL PLASHING SHEET METAL PURPOSES (AS IT ASSEMBLIES) ROOF SHEET METAL PLASHING SHEET METAL PURPOSES (AS IT ASSEMBLIES) ROOF SHEET METAL PURPOSES (AS IT		
THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING  THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING  THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING  SHEET METAL FLASHING AND TRIM (for coordination purposes)  ROOF SPECIALTIES (for coordination purposes)  MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes)  ROOF ACCESSORIES (for coordination purposes)  APPLIED FIREPROOFING  INTUMESCENT FIREPROOFING  PENETRATION FIRESTOPPING (as it relates to this scope)  JOINT FIRESTOPPING (as it relates to this scope)  PREFORMED JOINT SEALS (as it relates to this scope)  JOINT SEALANTS (as it relates to this scope)  ACOUSTICAL JOINT SEALANTS (as it relates to this scope)  SEALANTS (AS IT RELATES TO THE RE		· · · · · · · · · · · · · · · · · · ·
O7 62 00 SHEET METAL FLASHING AND TRIM (for coordination purposes) O7 71 00 ROOF SPECIALTIES (for coordination purposes) O7 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) O7 72 00 ROOF ACCESSORIES (for coordination purposes) O7 81 00 APPLIED FIREPROOFING O7 81 23 INTUMESCENT FIREPROOFING O7 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) O7 84 43 JOINT FIRESTOPPING (as it relates to this scope) O7 91 00 PREFORMED JOINT SEALS (as it relates to this scope) O7 92 00 JOINT SEALANTS (as it relates to this scope) O7 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) O7 95 13 EXPANSION JOINT COVER ASSEMBLIES O8 11 13 HOLLOW METAL DOORS AND FRAMES		(3. 33. 34. 4. 4. 4. 4. 4. 4. 4. 4. 4. 4. 4. 4. 4
07 71 00 ROOF SPECIALTIES (for coordination purposes) 07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 72 00 ROOF ACCESSORIES (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 81 23 INTUMESCENT FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 84 43 JOINT FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	07 54 23	THERMOPLASTIC -POLYOLEFIN (TPO) ROOFING
07 71 29 MANUFACTURED ROOF EXPANSION JOINTS (for coordination purposes) 07 72 00 ROOF ACCESSORIES (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 81 23 INTUMESCENT FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 84 43 JOINT FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	07 62 00	SHEET METAL FLASHING AND TRIM (for coordination purposes)
07 72 00 ROOF ACCESSORIES (for coordination purposes) 07 81 00 APPLIED FIREPROOFING 07 81 23 INTUMESCENT FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 84 43 JOINT FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	07 71 00	
07 81 00 APPLIED FIREPROOFING 07 81 23 INTUMESCENT FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 84 43 JOINT FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	07 71 29	· · · · · · · · · · · · · · · · · · ·
07 81 23 INTUMESCENT FIREPROOFING 07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 84 43 JOINT FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	07 72 00	
07 84 13 PENETRATION FIRESTOPPING (as it relates to this scope) 07 84 43 JOINT FIRESTOPPING (as it relates to this scope) 07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES		
O7 84 43  JOINT FIRESTOPPING (as it relates to this scope)  PREFORMED JOINT SEALS (as it relates to this scope)  JOINT SEALANTS (as it relates to this scope)  ACOUSTICAL JOINT SEALANTS (as it relates to this scope)  EXPANSION JOINT COVER ASSEMBLIES  HOLLOW METAL DOORS AND FRAMES	07 81 23	
07 91 00 PREFORMED JOINT SEALS (as it relates to this scope) 07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES		
07 92 00 JOINT SEALANTS (as it relates to this scope) 07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES	07 84 43	
07 92 19 ACOUSTICAL JOINT SEALANTS (as it relates to this scope) 07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES		, ,
07 95 13 EXPANSION JOINT COVER ASSEMBLIES 08 11 13 HOLLOW METAL DOORS AND FRAMES		, ,
08 11 13 HOLLOW METAL DOORS AND FRAMES		
08 14 16 FLUSH WOOD DOORS		
	08 14 16	FLUSH WOOD DOORS

# Addendum 8

08 31 13	ACCESS DOORS AND PANELS (as it relates to this scope)
08 33 00	INSULATED COILING COUNTER DOORS
08 33 13	COILING COUNTER DOORS
08 33 23	OVERHEAD COILING DOORS
08 36 53	VERTICALLY OPERATING SECTIONAL DOORS
08 41 13	ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS (for coordination purposes)
08 44 13	GLAZED ALUMINUM CURTAIN WALLS (for coordination purposes)
08 45 00	TRANSLUCENT SINGE PANEL WALL CLADDING ASSEMBLIES (for coordination purposes)
08 71 00	DOOR HARDWARE
08 83 00	MIRRORS
08 91 19	FIXED LOUVERS
09 21 16.23	GYPSUM BOARD SHAFT WALL ASSEMBLIES
09 22 16	NON-STRUCTURAL METAL FRAMING
09 29 00	GYPSUM BOARD
09 30 13	CERAMIC TILING
09 51 13	ACOUSTICAL PANEL CEILINGS
09 54 23	LINEAR METAL CEILINGS
09 54 46	POLYESTER FELT BLADE BAFFLE PANELS
09 64 29	WOOD FLOOR ASSEMBLIES
09 64 66	WOOD ATHLETIC FLOORING
09 65 10	HYBRID RESILIENT FLOORING (VCTT)
09 65 13	RESILIENT BASE AND ACCESSORIES
09 65 16	RESILIENT SHEET FLOORING
09 65 16.23	COMMERCIAL SLIP RESISTANT RESILIENT SHEET VINYL FLOORING
09 65 19	RESILIENT TILE FLOORING
09 65 66	RESILIENT ATHLETIC FLOOTING
09 67 23	RESINOUS FLOORING
09 68 13	TILE CARPETING
09 72 00	WALL COVERINGS
09 72 53	SPECIAL WALL COVERING
09 78 53	FLUSH JOINT LINEAR WALL PANEL SYSTEM
09 84 00	ACOUSTICAL WALL PANELS
09 84 00.01	FABRIC WRAPPED SOUND-ABSORBING WALL PANELS
09 84 00.03	SOUND-REFLECTING CEILING PANELS
09 84 17	CEMENTITIOUS WOOD FIBER WALL SHAPES ACOUSTICAL WALL PANELS
09 91 23	INTERIOR PAINTING
09 93 00	STAINING AND TRANSPARENT FINISHING (for coordination purposes)
09 96 00	HIGH-PERFORMANCE COATINGS
09 96 72	FLUID APPLIED INSULATIVE COATING
10 00 05	MISCELLANEOUS SPECIALTIES
10 11 00	VISUAL DISPLAY UNITS
10 11 00	SIGNAGE
10 14 00	PLASTIC TOILET PARTITIONS
10 21 13.19	CUBCILE CURTAINS AND TRACK
10 21 23	WIRE MESH PARTITIONS
10 22 13	FOLDING PARTITIONS
	DECORATIVE PROTECTION PANELS
10 26 23.11	
10 28 00	TOILET, BATH, AND LAUNDRY ACCESSORIES
10 28 00.13	ELECTRIC HAND DRYERS
10 44 13	FIRE PROTECTION CABINETS
10 44 16	FIRE EXTINGUISHERS
10 50 00	LOCKERS  ATHLETIC LOCKERS & STORAGE ASSEMBLIES
10 50 53	ATHLETIC LOCKERS & STORAGE ASSEMBLIES
00 00 00 06 4	Package OFA Coneral Trades

# Addendum 8

10 56 13	METAL STORAGE SHELVING
10 56 13.23	CANTILEVER METAL LIBRARY SHELVING (for coordination purposes)
10 73 10	PROTECTIVE COVERS
11 00 05	MISCELLANEOUS EQUIPMENT
11 13 13	LOADING DOCK BUMPERS
12 10 13	MURALS
12 21 13	HORIZONTAL LOUVER BLINDS
12 24 13	WINDOW SHADE SYSTEMS
13 34 13	GREENHOUSE AND GREENHOUSE RELATED EQUIPMENT
14 24 00	PASSENGER ELEVATOR
14 42 00	WHEELCHAIR LIFTS

Geotechnical Report issued by ECS Mid Atlantic, LLC dated February 3, 2024, with addendum dated March 21, 2024, for informational purposes only.

In addition to the above, trade contractors are to include, but are not limited to, AIA Documents A201 and A401, and various other Technical Specifications interfacing with this work. The Contractors are required to review the work descriptions of the other categories so as to not misunderstand the scope responsibilities. The Contractors are also bound to the HESS Safety Manual and all related weekly and daily documentation for North East Middle/High School Replacement Project for the administration of the contract.

#### **General Scope:**

Contractor is responsible for General Scope of Work listed elsewhere in this specification section.

#### THE SPECIFIC SCOPE OF WORK IS TO INCLUDE, but is not limited to, the following items:

#### **Temporary Facilities Specific Scope:**

- Contractor to provide temporary project identification signs, waste disposal services, temporary fire extinguishers, barricades, warning signs. Contractor shall provide temporary sanitary facilities for CM/Owner's field office (250 Gallon Waste Tank and 100 Gallon Flush Water Tank serviced 2 times per week for the duration of the project). Contractor to provide temporary sanitary facilities and hand-washing stations for the use of all Prime Contractors' personnel for the duration of the project. Contractor is responsible for its own temporary facilities.
- 2. Contractor includes all stairs, plan tables and rack(s) at the Construction Manager's temporary facilities for this project. Contractor to assume two sets of 4' wide stairs with 6'x4' platform decks, two (2) 22' long drafting tables, 37" high with sloped surfaces, topped with finish grade plywood and Vyco vinyl sheet drafting board covers. Provide one (1) Brookside Design rolling blueprint stand with one dozen pivot hangers and one dozen 42" long hanging drawing clamps. Removal of temp stairs & tables will be by this Contractor at end of project.
- 3. Within one calendar day of mobilization on site and prior to the commencement of work activities, Contractor is to provide a clear weatherproof covered bulletin board not less than 36 by 48 inches in size for displaying the Equal Employment Opportunity poster, a copy of the wage decision contained in the contract, Wage Rate Information poster, Safety and Health Information. Contractor shall include all posts and bracing as needed for proper support. Sign shall be located as directed by the CM.
- 4. Contractor shall furnish, install and remove when directed, the State of Maryland project sign. Contractor shall include all posts and wood bracing needed for proper support. Sign shall be located as directed by the CM.
- 5. Contractor shall furnish and install temporary openings protection with dimensional wood framing and heavy-duty reinforced fiber poly as needed. Quantity may be used at the discretion of the CM. Areas protected may include

heights up to 15' tall at storefront locations. Removal of protection to occur at the discretion of the CM. The owner reserves the right to a credit for all unused temporary protection. Quantities are as follows:

- a. Curtainwalls 4,000 SF
- b. Windows 4,000 SF
- c. Partitions 2,000 SF

#### Fall Protection / Safety Specific Scope:

- Contractor to provide, maintain, and remove, when directed, to MOSHA/OSHA compliant temporary rails, toe boards, etc. at the perimeter of all floors, raised slab edges, roofs, pits, elevator shafts, window openings, exterior wall openings, and any other area deemed a potential falling hazard by OSHA. Contractor to patch all construction damaged by temporary rails and toe boards. Contractor shall maintain all temporary measures through completion of project.
- 2. Contractor to provide and maintain MOSHA/OSHA compliant covers at all slab diamonds and temporary slab openings until concrete infill is installed. Holes made by any trade shall be covered and maintained by this Contractor. Covers must be of adequate strength to support 2 times the anticipated potential loads, secured against displacement and labeled as "hole" or with a fluorescent orange "X". If hole covers are damaged, Contractor shall immediately repair the hole cover and notify the CM.
- 3. Contractor to provide and maintain MOSH compliant temporary handrails at all stairways, safety rails at all slab edges, stairwells, slab openings, roof openings, and elevator openings. This must be maintained until permanent rails are installed, or as determined by the CM. Additionally, provide ¾" plywood tread protection tapconed to concrete at all stair treads. Adequate protection over all stair treads to eliminate damage of treads and/or nosings, after stairs are poured. Maintenance will be required on these. Removal and disposal of this work shall be by this Contractor when directed by the C.M.
- 4. Contractor to provide, maintain, and remove, when directed, temporary wood fillers in all metal pan stair treads and landings, if any. Wood fillers to be a snug fit to the full depth and width of all treads and landings and flush with the leading edge of the metal pans. Fillers to be OSHA/MOSHA compliant.
- 5. Contractor to provide and maintain parapet clamp guardrail system that is compliant with all OSHA / MOSH requirements at all roof parapets, while performing work.

#### **Construction Waste Management Specific Scope:**

- 1. Contractor to provide Waste Management Service in accordance with Division 1 and any LEED requirements.
- 2. Contractor to provide enough dumpsters for the proper and legal disposal of construction waste for all the Trades/Prime Contractors, for the duration of the project, except for Prime Contractor 03A, 04A, 07A, 31A, 32A, and 32B Contract packages..
- 3. Contractor to provide a minimum of twenty (20) 40-yard dumpsters for the exclusive use of the Owner's school personnel, as needed at any time during the project duration. Location of dumpsters to be coordinated with the CM.
- 4. Contractor will be required to dedicate one person per eight workers onsite, dedicated to project composite cleanup crew, once per week, for 8 hours (day shift & night shift, 2 cleaning crews total per week), for the duration of the project, typically on Fridays. In addition to this, Contractor shall provide one (1) competent supervisor and a minimum of two (2) laborers to oversee and take the lead in directing the composite cleanup crew for the entire duration of

the project (including time during Owner move-in and occupancy for each phase) whether working on site or not. Refer to special considerations at the end of this scope.

- 5. Contractor to submit within 30 days from Notice to Proceed with Construction Waste Management Plan, if required by specifications, for review and approval by Owner, Architect and CM.
- 6. Contractor to submit a Construction Waste Management Report, if required by specifications, with associated documentation on a monthly basis with the submission of the Payment Application. CM reserves the right to recommend payment rejection due to the lack of LEED Documentation.
- 7. Final Cleaning: All final cleaning required for the interior and exterior of the building as specified under 01 70 00 and other Div 0/1 sections. As it relates to resilient flooring, contractor shall provide final cleaning services (labor and equipment/tools) to include cleaning, stripping and three (3) coats of wax using floor stripper/floor wax material furnished by CCPS.

#### **Concrete Floor Enhancement Specific Scope:**

- Contractor shall furnish and install concrete floor enhancement for CONC-1 and CONC-2 in areas designated on the contract documents.
- 2. Contractor shall provide protection of enhanced finish floors from subsequent construction activities until direct to remove by the Construction Manager.

#### **Column Cover Specific Scope:**

- 1. Contractor to furnish and install all column covers interior and exterior called for on the contract documents.
- 2. Contractor includes all miscellaneous fasteners and caulking required for a complete and finished product.

#### **Drywall, Rough Carpentry, and Acoustical Assemblies Specific Scope:**

- 1. Contractor shall furnish and install cold formed metal framing, insulation, all weather barrier, drywall, and acoustical assemblies, ceiling tiles, wall panels, and the like work required by the Contract documents, including, but not limited to, all gypsum board, acoustical ceilings, translucent ceiling panels, grid suspension systems, acoustical treatment, acoustical panels, "Clouds", cementitious wood fiber panels, glass fiber reinforce plastic, cold formed metal framing, C-shaped loading bearing metal framing, metal stud kickers, hat channel, z channel, z-clips (7B trade contractor provides z channel and z clips at metal panel locations), metal furring, metal blocking, gypsum sheathing, dense glass, dense deck masonry back-up, acoustical joint sealers, acoustical sealants, hat channel, metal furring, drywall accessories, firestopping (as it relates to this Contractor's work), fire caulking (as it relates to this Contractor's work), sound caulking (as it relates to this Contractor's work), shaft wall assemblies, framing components for suspended / furred ceilings, corner bead, edge trim, control joints, access panels (including furnish and install of own and installation of those provided by other trades at drywall and masonry), and interior building insulation.
- 2. Contractor is to furnish and install all wood blocking which is exterior to the building, roof and window, as well as all wood blocking located within metal studs which is covered by drywall, dens-glass, or sheathing. This includes but not limited to lumber, wood structural panels, fire retardant treated materials, dimensional lumber, miscellaneous lumber, sheathing, etc. Contractor to coordinate with other trades for final locations and requirements.
- 3. Contractor shall coordinate with other Contractors on location of all work installed in partitions and ceilings. Contractor shall ensure that all required inspections have been made prior to closing walls and ceilings.
- 4. Contractor shall be responsible for the layout of all work in this Contract Package. The Contractor shall layout all partitions.

- 5. Contractor shall perform all welding required to complete its work.
- 6. Contractor shall furnish and install all light gauge metal bent plates, angles, plates, clip angles, and the like as required for attaching studwork to the structure.
- 7. Contractor shall inspect (jointly with the Painting Contractor) all drywall work with a droplight before and after the prime coat of paint and perform all necessary point—up. All drywall work to be finished per specification section 09 29 00.
- 8. Contractor to include drywall expansion/control joints as recommended by manufacturer if not specified elsewhere.
- 9. Contractor will coordinate with the 04A contractor for installation of hollow metal frames located in masonry walls. This Contractor shall ensure hollow metal frames are set plumb, level, square, and true to line. The 04A Contractor shall be responsible for maintaining hollow metal frames until the frame is completely enclosed in masonry and accepted by this contractor for installation of door slabs and finish hardware.
- 10. Contractor shall furnish and install temporary protection at each exterior opening of the building once the 04A contractor has completed work in that area. This protection shall consist of wood framing with a 15-mill poly attached. All maintenance of temporary protection is included and no additional payment will be made for this work.
- 11. Contractor to furnish and install acoustical panel ceiling, linear metal ceiling, polyester felt blade baffle panels, flexible wood veneers, fabric wrapped sound-absorbing wall panels, sound-reflecting ceiling panels and cementitious wood fiber wall shape acoustical wall panel assemblies. Contractor shall furnish all acoustic tile cut-ins for other trade Contractors. Contractor shall coordinate furnishings and installation of cut tile with the Construction Manager. Contractor shall coordinate installation and arrangement of ceilings system with affected trade contractors through the Construction Manager. The 21A Contractor shall coordinate and verify sprinkler head locations prior to cutting tile or installing grid by the 06A Contractor.
- 12. Contractor to include protection of acoustical treatments after installation.
- 13. Contractor to furnish and install all acoustical ceiling cloud and reflector systems complete. Contractor includes complete composite construction, shape and suspension as specified. Contractor acknowledges fire rating of cloud system as specified.
- 14. Contractor shall furnish and install all batt and acoustic insulation.
- 15. Contractor shall coordinate all embedded items incorporated in this work including, but not limited to, mechanical and electrical equipment for proper alignment, leveling, and access.
- 16. Contractor includes all reasonably inferred chases and bulkheads for mechanical piping shown on both architectural and mechanical drawings.
- 17. Contractor shall include full replacement of 5% of total square footage provided for ceiling tile and grid prior to acceptance of the ceiling systems at no additional cost. Contractor shall provide maintenance stock material as specified at no additional cost.
- 18. Contractor shall provide ventilator when installing drywall to reduce dust and humidity.
- 19. Contractor shall provide drywall point-up between prime and finish paint coats. Point-up to be inspected by the Construction Manager, Drywall and Painting Contractors prior to final coat of paint.

- 20. Contractor shall furnish and install infill with metal stud and drywall and fire sealant where applicable, where masonry walls cannot extend to deck.
- 21. Contractor shall provide drywall finishes as described in specification section 092900 Gypsum Board. Point-up of drywall should be minimal after priming of the surface. Excessive point-up or poor-quality workmanship will not be tolerated. Butts joints are to be taken out 24" minimum, factory joints 12" minimum. No board joints are to break at window or doorjambs.
- 22. Contractor to coordinate with 21A, 23A, and 26A contractor for installation of access doors furnished by other contractors. This contractor to include cutting of all drywall and additional framing to allow for installation of access doors. The 06A Contractor shall furnish and install access panels required for its own work and shall install access panels for other contractors' work. Other contractors shall furnish the access panels to the 06A contractor and provide layout.
- 23. Fire stopping of all penetrations is to be performed by the contractor making the respective penetration, ie... by 21A, 23A, and 26A.
- 24. The 04A Contractor is to furnish and install all exterior rigid and spray applied insulation on masonry backup walls, including but limited to behind, brick, precast, cast stone, finish block, and metal panel areas. Contractor to coordinate exterior framing being provided by this contractor. All other rigid insulation which is contiguous to this contractor's work is to be provided by this contractor.
- 25. Contractor shall furnish and install all structural thermal break material system as shown on contract documents.
- 26. Contractor to include preformed airtight steel flute deck sealer where required at drywall assembly construction.
- 27. Contractor to furnish and install sanitary wall panel systems in areas identified on the contract documents. Contractor includes all fasteners and miscellaneous accessories to provide a finished system.
- 28. Contractor shall install stair nosings furnished by 05A Contractor in locations shown on the contract documents.
- 29. Contractor shall include 1,000 If allowance for conditions where masonry walls cannot extend to the metal decking and thus require enclosures as indicated in the wall termination details in the contract documents.

#### **Applied Fireproofing Specific Scope:**

- 1. Contractor shall furnish and install all spray fireproofing necessary for a complete installation as required by the Contract Documents.
- 2. Contractor is to ensure that fireproofing operations will not damage or mar any adjoining finishes. Contractor includes masking of all surfaces to remain exposed. All cost associated with repairing finishes as a result of contractor's negligence will be borne by this contractor.
- 3. Contractor to coordinate with 05A Contractor to ensure spray fireproofing is compatible with steel and joist primer.
- 4. Contractor shall include an allowance of \$54,000.00 for material and labor for patching as directed by the Construction Manager. Contractor to provide crew rate to Construction Manager within 10 days of execution of contract.
- 5. Contractor includes patching of all area's owners testing agency disturbs at no additional cost.
- 6. Contractor includes all additional materials and cost of retesting areas which do not pass owner provided testing agency requirements.

Addendum 8

- 7. Contractor is responsible for cleanup to return workspace to condition it was given to prior to the start of spray fireproofing.
- 8. Contractor assumes multiple mobilizations for the work.
- 9. Temporary electric and water connections from a single location per floor. Temporary electric and water connections to each floor will be provided by MEP contractors.
- 10. Contractor responsible for any minor preparations necessary to apply fireproofing. Contractor responsible for an inspection of substrates 2 weeks prior to beginning of work. Commencement of work is acceptance of substrate.

#### **Intumescent Paint Specific Scope:**

- 1. Contractor shall furnish and install all intumescent paints necessary for and incidental to a complete installation as required by the Contract Documents.
- 2. Contractor is to ensure that intumescent operations will not damage or mar any adjoining finishes. Contractor includes masking of all surfaces to remain exposed. All cost associated with repairing finishes as a result of contractor's negligence will be borne by this contractor.
- 3. Contractor includes cleaning and surface preparation prior to application of materials.
- 4. Contractor to coordinate with 05A Contractor to ensure intumescent paint is compatible with steel, joists, and decking substrate.

#### **Sealants Specific Scope:**

- 1. Contractor shall furnish and install all sealants and caulking necessary for and incidental to a complete installation as required by the Contract Documents.
- 2. Contractor is to ensure that caulking operations will not damage or mar any adjoining finishes. All cost associated with repairing finishes as a result of contractor's negligence will be borne by this contractor.
- 3. The following caulking items are included in this scope of work as noted:
  - a) Joints between differing materials
  - b) Perimeter joints of hollow metal frames and elevator jambs, interior and exterior sides,
  - c) Control and expansion joints in ceilings and other overhead surfaces,
  - d) Interior joints of all perimeter of slab on grade to wall,
  - e) Joints between all plumbing fixtures and adjoining walls, floors and counters,
  - f) Perimeter (both sides) of all interior windows,
  - g) Interior and exterior perimeter of wall louvers,
  - h) Exterior perimeter of exterior wall scuppers,
  - i) Top and bottom of stair stringer to wall joint,
  - j) Perimeter of all access panels,
  - k) Toilet accessories to substrate when applicable,
  - I) Plumbing fixtures to substrate when applicable,
  - m) Mirrors to substrate when applicable,
  - n) Dissimilar materials which can lead to possible water infiltration,
  - o) Other joints as indicated on contract documents or specifications,
  - p) Access to own work.

# **Expansion joint Cover Assemblies Specific Scope:**

- 1. Contractor will furnish and install all expansion joints and covers inclusive of fire rated joint system assemblies complete, inclusive of floor, wall and ceilings. Roof expansion joints are by the 07A Contractor. Exterior expansion joints located in masonry are by the 04A Contractor. Contractor to coordinate with the 03A contractor prior to slab pours. Fire-rated joint systems at curtainwalls are furnished and installed by the 08B Contractor.
- 2. Contractor shall provide anchoring devices for installation and embedding by the 03A contractor. Provide templates and rough-in measurements.

#### **Doors, Frames, Hardware Specific Scope:**

- 1. Contractor shall furnish and install all hollow metal door frames (including sidelights, borrowed lights, transom frames, and architectural stick assemblies), hollow metal window frames, hollow metal doors, pre-finished wood doors, and finish hardware (including but not limited to all hinges, continuous hinges, locks, latch sets, deadlocks, exit devices, removable mullions, door closers, electro-magnetic locks, power supplies, key switches, power door operators, overhead stops, overhead holders, push plates, pull plates, anti-vandal pulls, kick plates, armor plates, flush bolts, floor stops, wall stops, thresholds, astragals, weatherstripping, gasketing, door silencers, key cabinets, and the like). Contractor shall adhere to the requirements of the contract documents with regard to quality assurance, regulatory agencies, submittals, samples, products, warranties, factory staining, key control systems, keys/keying, and the like.
- 2. Contractor shall furnish and install. ADD#3 all hardware required for the aluminum doors on the project. All hardware will be delivered to the 08B contractor for installation. Contractor shall provide a list of hardware provided and have the 08B contractor acknowledge receipt. If contractor fails to have a delivery receipt signed by 08B contractor than this contractor will be required to provide any missing items.
- 3. Contractor to install (1) 3' x 7' hollow metal frame within masonry mockup panel.
- 4. Contractor to install all final keyed cores under this scope as well as storefront and overhead doors scope per Owner direction. Contractor to include installation and setting up of key cabinet.

# **Coiling Door Specific Scope:**

- Contractor shall provide and install a complete coiling counter doors, overhead coiling doors and sectional door
  package. Contractor shall adhere to the requirements of the contract documents with regard to performance,
  submittals, quality assurance, warranty, manufacturers, door curtain materials & construction, hoods & accessories,
  counterbalancing mechanisms, guides, manual door operators, finishes, installation, adjusting, protection, cleaning,
  and demonstration.
- 2. Contractor to coordinate with Electrical contractor to ensure proper power requirements are brought to door operator as well as connections to fire alarm system. Contractor will furnish and install any transformer, rectifiers, controls, as required, Electrical contractor has final connection of electrical and F/A only. All control switches are to be of the keyed variety unless specifically authorized otherwise in writing by the architect.
- 3. Contractor includes furnish and installation of electric door operator with means of disconnect, electric motors, remote control station, etc.
- 4. Contractor includes cost of factory-authorized service representative to perform startup and training of owner's personnel.

5. Contractor includes furnishing and installation of loading dock bumpers as required by contract documents.

#### **Fixed Louver Specific Scope:**

- Contractor shall furnish and install all fixed louvers with insect screens and blank-off panels identified on the contract documents.
- 2. Contractor shall provide a finish warranty for all Factory-Applied finished as outlined in specifications.

#### **Painting Specific Scope:**

- 1. Contractor to include all, interior and exterior prepping, priming, and painting of all materials as called out in specifications and construction documents including but not limited to steel, galvanized metals, aluminum, concrete, masonry, wood, gypsum, etc.
- 2. Contractor to include stenciling/labeling of all fire walls as directed by contract documents and by local jurisdiction.
- 3. Contractor to include light sanding of walls between primer, first and second coats when applicable.
- 4. Contractor to include painting of mechanical and electrical work to include but limited to, when applicable, uninsulated metal piping, uninsulated plastic piping, pipe hangers and supports, tanks without factory finishes, visible portions of internal portion of metal ducts without liner, behind all diffusers and grilles, exposed ductwork, all mechanical equipment without a factory finish, all electrical equipment without a factory finish, exposed conduits, etc which is not concealed in chases or above ceilings as directed by the specifications.
- 5. Contractor to include sealing and or hardeners of all exposed concrete floors. Material is to be of the tinted variety. Contractor to apply product one time immediately prior to substantial completion. Contractor to include cleaning of floors to manufacturer's standard prior to application.
- 6. Contractor to include all block filler applications. Two coats minimum.
- 7. Contractor to include painting of all exterior rails, lintels, exposed non prefinished metallic materials.
- 8. Contractor to include proper preparation for painting of all galvanized materials.
- 9. Contractor to include all cleaning of surfaces as dictated in the specifications prior to application of product.
- 10. Contractor to include caulking of drywall to block and or concrete surfaces.
- 11. Contractor shall be responsible for all minor touch-up and repainting work caused by installation of adjacent work.
- 12. Contractor to provide a paint schedule for submittal to the Architect, Owner, and Construction Manager.
- 13. Contractor is responsible for any rework as a result of dirt blown into finish, unless notice is given to the Construction Manager prior to beginning work that the area in question is not ready for painting.
- 14. Contractor to include any masking off of materials as required to properly protect other finished materials. Contractor to product adjacent finished surfaces. Overspray to be cleaned at this contractor's expense

# **Miscellaneous Specialties Specific Scope:**

- 1. Contractor shall furnish labor materials, tools, equipment, services and supervision required for the complete work for the display and poster cases, Outdoor LED message display and art display rail as indicated and required by the contract documents.
- 2. Contractor shall include all incidental and complementary work shown, specified or necessary to provide a complete installation.
- 3. Contractor to furnish and install all prefabricated bulletin boards and display cases including but not limited to recessed trophy and display cases, glass doors, metal trim and accessories, wood box enclosures, lighting fixtures, etc.
- 4. Contractor to coordinate opening sizes with 04A and 05A contractors depending on location.
- 5. Contractor to coordinate with the 21A contractor on sprinkler head requirements and locations. Contractor to include any and all modifications to allow for access of this system at no cost to owner.
- 6. Contractor to coordinate all voltage requirements with the 26A contractor.
- 7. Contractor includes any incidental caulking of work provided under this scope for a complete and finished product.
- 8. Contractor is responsible for coordination of all in wall blocking required for this work, prior to wall close-in. Blocking to be furnished and installed by the 06A contractor if covered by drywall, all other blocking for this scope is by this contractor.
- 9. Contractor to furnish and install all hook and loop mat hangers and coordinating wall padding, high-impact corner guards, for a complete installation as indicated on construction documents

#### **Visual Display Units Specific Scope:**

- 1. Contractor to furnish and install all visual display surfaces including but not limited to markerboards, tackboards, display and map rails, and all related accessories etc for a complete installation as indicated on construction documents.
- 2. Contractor to coordinate substrate requirements with 04A, and 06A contractors depending on location.
- 3. Contractor includes any incidental caulking of work provided under this scope for a complete and finished product.
- 4. Contractor is responsible for coordination of all inwall blocking required for this work, prior to wall close-in by the 06A drywall contractor. Blocking to be furnished and installed by the 06A contractor if covered by drywall, all other blocking for this scope is by this contractor.

#### Signage Specific Scope:

- 1. Contractor to furnish and install all interior signage, educational signage, panel signage (both interior and exterior), dimensional characters, cast metal plaques, way finding signage, outdoor LED signs, signage accessories and the like inclusive of fasteners, mastics(s) and perimeter sealant.
- 2. Contractor is responsible for coordination of any in-wall blocking if needed for this work, prior to wall close-in. Blocking to be furnished and installed by the 06A contractor if covered by drywall, any other blocking for this scope is by this contractor. Contractor is responsible for coordination of the required power requirements with the 26A package.

- 3. Contractor includes all incidental caulking of own work for a complete installation.
- 4. Room identification signage to be mounted at latch side of door or as indicated on construction documents.
- 5. Contractor shall provide all temporary project signage per specification 01 58 13.00

# Plastic Toilet Partitions and Toilet Accessories Specific Scope:

- Contractor to furnish and install all toilet compartments inclusive of solid polymer units, pilaster shoes and sleeves, brackets, heat-sink strips and any other accessory required for a complete installation as indicated on contract documents and specifications including but not limited to overhead braced toilet enclosures, and wall mounted urinal screens.
- 2. Toilet and Bath accessories which will be furnished and installed by this contractor are to include, but not limited to, all mirror units, grab bars, toilet tissue dispensers, soap dispensers (including every sink throughout the building), paper towel dispensers (including every sink throughout the building), sanitary napkin disposals, shower curtain rods, shower curtain and hooks, diaper changing stations, warm-air dryer, coat hooks, robe hooks, mop and broom holders and all other accessories, anchors, fasteners and caulking as indicated or specified for a complete installation.
- 3. Contractor to coordinate with 05A Contractor for structural support of all items furnished under this scope of work.
- 4. Contractor is responsible for coordination of all in-wall blocking required for this work, prior to wall close-in by the 06A drywall contractor. Blocking to be furnished and installed by this contractor if covered by drywall, all other blocking for this scope is by this contractor.
- 5. Contractor to coordinate with tile contractor for installation of floor fasteners as applicable. Any damaged tile which occurs during installation of work, under this scope, will be the responsibility of this contractor.
- 6. Contractor responsible for final adjustment of hardware per the specification immediately prior to substantial completion.
- 7. Contractor to furnish only, for installation by Electrical Contractor all electric hand dryers, and associated anchors and fasteners. Contractor to coordinate with Electrical Contractor for exact power requirements.

#### **Cubicles Specific Scope:**

- Contractor to furnish and install all cubicles complete including but not limited to, track, curtain, track accessories, curtain carriers, exposed fasteners, concealed fasteners, etc. as indicated on the contract documents. Contractor to include all own blocking for this work.
- 2. Contractor includes field measuring of spaces prior to fabrication.

# Wire Mesh Partitions Specific Scope:

- 3. Contractor to furnish and install all wire mesh partitions complete including but not limited to, woven wire mesh, framing/support members, doors, welding fasteners, accessories, fabrication, etc. as indicated on the contract documents. Contractor to include all own blocking for this work.
- 4. Contractor includes field measuring of spaces prior to fabrication.

#### **Folding Panel Partitions:**

- 1. Contractor shall provide and install a complete operable folding panel partitions and folding glass-panel partition systems including but not limited to special warranty, design intent and arrangement, panel construction, panel weight, panel thickness, panel closure, hardware, vertical and horizontal seals, finish facing, acoustical wall carpet covering, trimless edges, suspension tracks, carriers, aluminum finish, steel finish, electric operators (coordinate with 26A contractor for proper voltage), control equipment, motor characteristics, remote control stations, infra-red detector system with alarm, limit switches, emergency release mechanisms, pass doors with self-illuminating exit signs, adjustments, light leakage tests, acoustical tests by independent certified acoustical consultant, cleaning and demonstrations
- 2. Contractor to coordinate with 05A and 06A Contractors for structural support, above ceiling acoustical treatment requirements, final ceiling heights and adjacent flooring requirements.
- 3. Contractor to coordinate with 26A Electrical Contractor to ensure proper power requirements are brought to door operator as well as connections to fire alarm system. The 26A Contractor will provide power to the motor, all wiring within the system will be the responsibility of this contractor.
- 4. Contractor includes cost of factory-authorized service representative to perform startup and training of owner's personnel.
- 5. Contractor to protect wood floor with two layers of ¾ inch plywood with resin paper between the wood floor and the plywood for any lift work over the finished floor.

# **Decorative Protection Panel Specific Scope:**

- 1. Contractor to furnish and install decorative protection panels with custom graphic designs as designated on the contract documents.
- 2. Contractor includes any incidental caulking of work provided under this scope for a complete and finished product.
- 3. Contractor is responsible for coordination of all inwall blocking required for this work, prior to wall close-in.

  Blocking to be furnished and installed by this contractor if covered by drywall, all other blocking for this scope is by this contractor.

# **Fire Protection Specific Scope:**

- 1. Contractor to furnish and install fire protection cabinets and fire extinguishers in the locations shown on the contract documents.
- 2. Contractor is responsible for coordination of all wall openings within masonry walls with the 04A contractor. Blocking in drywall partitions to be furnished and installed by this contractor.

#### **Locker Specific Scope:**

- 1. Contractor to furnish and install all metal and metal grid lockers, solid phenolic lockers as indicated including, locks, locker accessories, fasteners and anchors, doors, perforated doors, hinges, recessed handles and latches, interior shelving, bases, angled tops, finished end panels, hooks, identification plates, center dividers, acoustical treatment, concealed vents, combination pad locks, interior equipment, recess trim, latch stiffeners, filler panels, boxed end panels, final cleaning and lubrication prior to substantial completion, etc.
- 2. Contractor to submit numbered layout drawing prior to fabrication for approval.
- 3. Contractor to coordinate concrete pads and wood sleeper (locker base) requirements with Concrete Contractor.

Addendum 8

- 4. Contractor to coordinate base requirements with the Resilient Flooring and Floor Tile Contractor.
- 5. Contractor is responsible for coordination of all in wall blocking required for this work, prior to wall close-in. Blocking to be furnished and installed by this contractor if covered by drywall.
- 6. Contractor to include incidental caulking associated with this work for a complete system.
- 7. Contractor to include own labor and equipment for unloading of deliveries; deliveries which arrive without contractor forces onsite will be immediately denied access to the site.

# **Metal Storage Shelving Specific Scope:**

- 1. Contractor to furnish and install all Metal Storage Shelving including but not limited to Post-And-Shelf metal storage shelving, inclusive of posts, bracing, solid shelves, shelf-to-post connectors, bases, and baked enamel finish.
- 2. Contractor to coordinate concrete pads if required with Concrete Contractor.
- Contractor includes permanent attachment of shelving to adjacent walls. Single point attachment to slab will not be accepted.
- 4. Contractor is responsible for coordination of all in wall blocking required for this work, prior to wall close-in. Blocking to be furnished and installed by this contractor if covered by drywall, all other blocking for this scope.
- 5. Contractor to include own labor and equipment for unloading of deliveries, deliveries which arrive without contractor forces onsite will be immediately denied access to the site.

#### **Storage Specialties Specific Scope:**

- 1. Contractor to furnish and install gliding high-density cart, portable high-density carts and all accessories necessary for a complete installation.
- Contractor to examine all areas for compliance with manufacturers installation tolerances including overhead
  clearances prior to starting work. Once contractor has started installation, this will constitute acceptance of
  previously installed work.

# **Protective Cover Specific Scope:**

- 1. Contractor to furnish and install all protective covers as indicated, detailed, and specified including but not limited to general design requirements and arrangements, structural performance, field measurements, special warranties, steel, aluminum, anchors, fasteners, fittings, hardware, galvanize repair paint, bituminous paint, grout, gaskets, aluminum flashing, support structure, extruded aluminum roof decking, roll-formed aluminum roof deck, metal roofing and fascias, excavation, placement and backfill of concrete foundations, anchor bolts, plumbing connections and piping to storm system to a point 5' outside of canopy roof edge, coordination of electrical installation for a complete turn-key installation.
- Contractor is responsible to coordinate with 04A, 05A, 21A, 23A, 26A contractors for flashing, plumbing, sprinkler
  and electrical rough-ins. All structural support, flashing, counter flashing, etc... is to be provided by this contractor.
  In wall flashing or reglets required for this work is to be furnished by this contractor to the 04A contractor for
  installation prior to start of exterior façade work.
- 3. Contractor to include incidental caulking associated with this work for a complete system.

#### **Mural Specific Scope:**

- 1. Contractor shall furnish and install mural system in locations as show on contract documents. This scope of work will require that the wall area receive an extremely high finish. Please review material product data and installation instructions for proper install
- 2. Contractor/Installer shall be by a certified, trained and approved by the film manufacturer.
- 3. Contractor shall provide the eight-year warranty as outlined in the specifications.
- 4. Contractor shall inspect substrate prior to installation to ensure moisture content and surfaces are treated to meet manufacturers requirements.

#### **Blinds and Shades Specific Scope:**

- 1. Contractor to furnish and install all louvered blinds and roller shades (manual and electrical operated) including but not limited to proper louver slats, headrail/valance, bottom rail, tilt control, lift operation, cord lock position, ladders, mounting, colors, textures and gloss for a complete and operational installation.
- 2. Contractor to seal all screw holes and penetrations through window framing.
- 3. Contractor to acknowledges that every window, storefront, curtainwall, door lite, sidelite, transom etc.; every piece of glass within the building and building perimeter is to receive a louvered blind or shade, depending on location per specifications. This is in the event of a code red and associated security measures.
- 4. Contractor to coordinate with HM Frame and Aluminum Frame suppliers for method of attachment.
- 5. Contractor responsible for final adjustment, cleaning, and touch-up immediately prior to substantial completion.
- 6. Contractor to include own labor and equipment for unloading of deliveries, deliveries which arrive without contractor forces onsite will be immediately denied access to the site.
- 7. Contractor includes all incidental caulking related to this scope of work.

# **Site Amenities Specific Scope:**

- 1. Contractor shall furnish and install the Pergolas (i.e. front canopy) shown on sheet L502 in locations shown on the contract documents. Contractor shall provide all core drilling, anchoring materials, and the like to complete the installation of the items. Contractor to coordinate and install foundations required for these items.
- 2. Contractor shall furnish and install all footings required for items included in this scope.
- 3. All furnishings are to be installed level, plumb and true and securely anchored or positioned at locations as indicated on drawings.

#### **Greenhouse Specific Scope:**

- 1. Contractor to furnish and install all material and erection of the greenhouse superstructure including all glazing, doors and door hardware, and ventilation as shown on plans for a complete and operational installation.
- 2. Contractor to seal all areas where greenhouse contacts with dissimilar material as well as any sealants required for a complete installation.

- 3. Contractor shall include structural design signed and sealed by an engineer licensed in the state of Maryland. This design shall meet the Maryland IBC 2018 requirements.
- 4. Contractor shall include all necessary and required expansion control as well as any covers necessary or specified.
- 5. Contractor is responsible for all sill flashing where greenhouse meets foundation walls.
- 6. Contractor to furnish and install all exhaust fans, EVAP cooling system and heating system, horizontal air flow fans, retractable shade/heat retention curtain system, benchtop drip irrigation, automatic controls, supplemental plant growth lighting, overhead fixed lighting support system, environmental control system and benches.
- 7. Contractor to include own labor and equipment for unloading of deliveries, deliveries which arrive without contractor forces onsite will be immediately denied access to the site.
- 8. Contractor to include two year warranty on materials and workmanship and a preventative maintenance agreement that includes one trip per year scheduled through the greenhouse manufacturer.

# Passenger Elevator Specific Scope:

- 1. Contractor to furnish and install a complete elevator system including but not limited to, rails, car frame and platform, doors, operator, call buttons, hall lanterns, pumps, sensors, piping, inserts, car enclosure, entrances, signal equipment, etc. Cars to be of "machine room-less", traction type, and meet all other requirements of section 14 24 00. Contractor to include the costs of all third party and state inspections.
- 2. Mechanical and Electrical final connections will be performed by others. Contractor shall provide all connectors, piping, integral wiring and piping, as well as all equipment connections, cords with plugs, etc., incidental to this phase of the work. Coordinate with Electrical and Mechanical Contractors to provide complete installation.
- 3. Contractor to coordinate floor finishes and recessed areas with Steel, Concrete, and Flooring Contractor(s).
- 4. Contractor will secure all necessary inspections as required by the applicable local or state agencies.
- 5. Contractor shall schedule all required inspections. Contractor shall coordinate with other trades regarding final inspections.
- 6. Contractor is to supply all necessary brackets, embeds, or other mounting hardware that must be installed concurrently with the Concrete Contractor or Masonry Contractor.
- 7. Contractor to coordinate all metal fabrications as required for installation of the lift systems and accessories including but not limited to attachment plates, structural steel shapes for sub-sills, sump pits and pit ladders.
- 8. Contractor to coordinate integration of the elevator systems with the fire control system including any necessary submittals to local or state fire control agencies.
- 9. Contractor to coordinate integration of the elevator systems with the electrical and voice systems.
- 10. It is understood that the elevator will be used for access to upper floors prior to substantial completion of the project. It is assumed this contractor will obtain a construction use permit, and therefore not install cab finishes until a second mobilization, at which time, upon completion of cab finishes, a final inspection will be obtained.
- 11. Contractor has included the cost for maintenance during the construction use period, Contractor to assume a construction use period of three (3) months. Actual usage will be tracked monthly via ticket and a contract adjustment, if necessary, will be made at scope completion.

Addendum 8

- 12. Contractor to warrant the elevator systems per the specifications and has included the costs for the extended warranty of the construction use period.
- 13. Contractor to coordinate with Miscellaneous Metal Contractor and MEP Contractor(s) for location of pit ladder, sump pit, fire alarm devices, sprinkler heads and lighting.
- 14. Contractor to include forty (40) hours labor use of the platform by other trades to accomplish installation of all MEP devices and Sprinkler Head, Masonry Shaft point up, fire caulking etc. Actual hours will be tracked via ticket and a contract adjustment, if necessary, will be made at scope completion.
- 15. Contractor to provide pit layout as a separate submittal within two weeks of Letter of Intent, Notice to Award, or Contract, whichever is issued first.
- 16. Elevator cab flooring will be tile flooring, by others.
- 17. Contractor has included two mobilizations for installation of elevators in each phase.
- 18. Contractor has included three (3) days of standby time for observation of elevator during the first week school is open during school hours to ensure proper operation. This will be an additional mobilization which this contractor has included.
- 19. Contractor to coordinate with Electrical Contractor for fire alarm activation and integration with Elevator.
- 20. Elevator door key to be furnished to Construction Manager for access to pit after hours.
- 21. Contractor has included keyed switch operation. Contractor to furnish a minimum of twenty-five (25) keys (of each type and use) to Construction Manager at scope completion.

#### **Hard Tile Specific Scope:**

- 1. Contractor to furnish and install all materials in the above specification sections, which includes but is not limited to: floor and wall tile, ceramic mosaic, porcelain, quarry, glazed and unglazed wall tile, thresholds, and accessories including but not limited to thin set material, thick set material, reducer strips, transition strips, base, shower receptors, waterproofing and/or vapor retarders etc.
- 2. Contractor to coordinate slab depressions with Concrete Contractor.
- 3. Contractor to coordinate base requirements with the 06A and 06B contractors for cabinetry, built in shelving, and metal lockers.
- 4. Contractor to coordinate patterns of materials furnished under this contract with the construction documents.
- 5. Contractor to include proper treatment of control joints within slabs prior to laying of floors.
- 6. Contractor to include caulking of control joints within own work. Caulking color to be determined by Architect.
- 7. Contractor to include 100% flash patching and leveling of all floors to receive materials under this scope of work.
- 8. Grinding of floors is not part of this package and is to be assumed by the 03A Contractor provided this contractor gives proper notice of unacceptable conditions two weeks prior the start of work.
- 9. Contractor includes waterproofing of slabs prior to installation of flooring for second and third floor applications as specified. Contractor includes water testing of slabs as specified prior to the installation of tile.

- 10. Contractor includes crack isolation membrane as specified.
- 11. Contractor to include tile cleaning and grout sealer prior to protection of floors.
- 12. Contractor to include protection of installed products with craft paper. Contractor to include removal of protection and placement into dumpster provided by Construction Manager at project completion.

#### **Wood Flooring Specific Scope:**

- 1. Contractor to furnish and install all wood floor assemblies and wood athletic flooring, as indicated. Contractor to include but not limit to membranes, sleepers, plywood, adhesives, subflooring, maple flooring, fasteners, all finishing materials, perimeter base, adhesives, striping etc... associated with this work.
- 2. Contractor to coordinate with Concrete contractor for inlaid requirements for proper installation of wood flooring at stair area.
- 3. Contractor to coordinate slab depressions with Concrete Contractor.
- 4. Contractor to include two moisture tests prior to floor installation.
- 5. Contractor to include proper treatment of control joints within slabs prior to laying of floors.
- 6. Contractor to include any incidental caulking associated with this scope for a complete finished product.
- 7. Contractor to include floor cleaning prior to protection of floors.
- 8. Contractor to include incidental flash patching and leveling of areas to receive wood flooring.
- 9. Grinding of floors is not part of this package and is to be assumed by the 03A Contractor provided this contractor gives proper notice of unacceptable conditions two weeks prior the start of work.
- 10. Flooring to be laid parallel with long dimension of space unless noted otherwise.
- 11. Contractor to include all nosings, edging, corner treatments, transition strips and any other accessories required for a complete installation of this work.
- 12. Contractor to include athletic stripping. Contractor to submit final layout drawings for approval prior to start of flooring.
- 13. Contractor to include wood flooring at stage as indicated. Contractor to include but not limit to membranes, sleepers, plywood, adhesives, subflooring, maple flooring, fasteners, all finishing materials, perimeter base, adhesives, etc... associated with this work.
- 14. Contractor to include temporary equipment to bring temperature and humidity into acceptable ranges for installation of flooring. Contract to include temporary barricades as necessary.
- 15. Contractor to include protection of installed products after proper cure time of finishes. Contractor to furnish and install temporary protection as directed in each specification section in Division 9. As noted in the specifications, floor protection to be based on type of construction activities that may occur on the finished floor in that area. Contractor to include removal of protection and placement into dumpster provided by Construction Manager at project completion.

#### **Resilient & Carpet Specific Scope:**

- 1. Contractor to furnish and install both roll and tile carpet and accessories including but not limited to mastic, reducer strips, transition strips, base, etc.
- 2. Contractor to furnish and install tile resilient flooring and accessories including but not limited to mastic, reducer strips, transition strips, cove and straight base, etc. inclusive of rubber floor tile, vinyl composition floor tile, slip retardant vinyl composition floor tile, cushioned rubber flooring.
- 3. Contractor to coordinate base requirements with the 06A contractor for cabinetry and built-in shelving.
- 4. Contractor to furnish and install resilient stair tread/nosings and accessories as indicated.
- 5. Contractor to furnish and install resilient molding accessories.
- Any unclear situation within the construction documents with regards to base is assumed to be base provided by this contractor.
- 7. Any unclear situation(s) within the construction documents with regards to flooring is assumed to be resilient flooring provided by this contactor.
- 8. Contractor to coordinate patterns of materials furnished under this contract with the construction documents.
- 9. Contractor to include caulking of door jambs to resilient flooring.
- 10. Contractor to include proper treatment of control joints within slabs prior to laying of floors.
- 11. Contractor to include 100% flash patching and leveling of areas to receive resilient flooring.
- 12. Grinding of floors is not part of this package and is to be assumed by the 03A Contractor provided this contractor gives proper notice of unacceptable conditions two weeks prior the start of work.
- 13. Contractor to include protection of installed products with self-sticking plastic at carpet areas and tear resistant / reinforced protection at resilient areas. Contractor to include removal of protection and placement into dumpster provided by Construction Manager at project completion.
- 14. Subsequent to protection above and completion of other trades work, yet prior to substantial completion, it is the responsibility of this contractor to perform the cleaning, striping, and waxing/polishing of floors installed by this contractor per specifications. Prior to cleaning, striping and waxing/polishing, contractor to remove protection and replace damaged flooring at no cost to Owner or Construction Manager.

#### **Resinous Flooring Specific Scope:**

- 1. Contractor to furnish and install all resinous flooring, integral cove base and accessories including but not limited moisture tests, floor treatments, abrasive strips control joint strips, patterns and color(s), etc...
- 2. Contractor to coordinate patterns and colors of materials furnished under this contract with the construction documents and existing materials. Subcontractor to provide samples to be submitted for approval.
- 3. Contractor to include all floor prep outlined within the specifications.
- 4. Contractor to include proper treatment of control joints within slabs prior to installation of resinous flooring.

- 5. Contractor to include caulking of control joints within own work, inclusive of perimeter.
- 6. Grinding of floors is not part of this package and is to be assumed by the 03A Contractor provided this Contractor gives proper notice of unacceptable conditions two weeks prior to the start of work.
- 7. Contractor includes necessary work to bridge all control joints.
- 8. Contractor to review areas with Construction Manager prior to installation of resinous material.

#### **Responsibilities for Parapet Walls**

04A – CMU, masonry veneer, grout, flashing and all other incidentals as shown and specified under 04 20 00. Install anchor bolts in CMU, furnished by 05A Contractor. Cavity wall insulation (rigid or mineral wool as shown) at all locations where insulation is behind masonry. All fluid applied membrane air barrier system complete, including continuous air barrier transition membrane at top of parapet, regardless of substrate. Provide termination sealant accepted for air barrier warranty as shown. The air barrier system for the entire building must be certified and warranted as a complete system as specified per 07 27 26.

05A – Furnish anchor bolts for parapet blocking to 04A Contractor for installation. Provide galvanized steel bent plates/angles at all locations shown.

06A – Provide all wood blocking, plywood, metal stud framing, bridge plates and exterior sheathing as shown. Provide batt insulation and mineral wool insulation within metal stud framing and at expansion joint cavities as indicated. Provide rigid foam board insulation where directly behind plywood sheathing (example A14/A432, and similar.)

07A – Provide all pre-finished coping and products specified under 07 41 13.16, cover board, flashings/counter-flashings for roof system, transition membrane from roof membrane over parapet blocking (overlapped to air barrier transition membrane). Provide closed cell backer rod, flashing strips, and all other incidentals necessary for a complete termination of roofing system as shown and specified under 07 54 23.

07B – Provide all thermal break cladding support systems complete as shown and specified. Provide all insulation (rigid and mineral wool) where shown behind metal panels. Provide all metal panels as shown and specified.

#### Wheelchair Lift Specific Scope:

- 1. Contractor to furnish and install vertical platform lift with all accessories called for in locations indicated on the contract documents.
- 2. Contractor shall visually inspect area lift is to be installed prior to starting and confirm in writing that the area is acceptable. Once installation is started this will constitute acceptance and any deficiencies encountered will be the responsibility of this contractor.
- 3. Contractor includes all permits and inspections required by local jurisdictions.
- 4. Contractor includes all demonstrations and turnover documents.

# **Selective Demolition Scope:**

 Contractor shall provide all selective demolition indicated and as required for new work associated with the existing field house.


#### **SPECIAL CONSIDERATIONS:**

- 1. Contractor acknowledges and has accounted for within his bid, the second and fourth Saturdays of each month as required workdays. Contractor is expected to provide a crew of the same size that is provided during Monday through Friday. No exceptions.
- 2. This bid package has a MBE goal of \_20\_ percent. All prime contractors, including certified MBE firms, when submitting bids or proposals as a prime contractor, are required to attempt to achieve this goal from MDOT certified MBE firms. All submittals of MBE materials and reporting requirements are applicable for the project, including the submittal of MBE Attachments A and B with its bid as described in specification section 00 43 39 Minority Business Enterprises Procedures.


#### **EXCLUDED FROM THIS CONTRACTOR WORK is:**


1. Testing costs, unless specifically called for in this scope, or a result of negligence, poor workmanship, or failure of work to meet the requirement of the documents.

**END OF SCOPE 06A** 

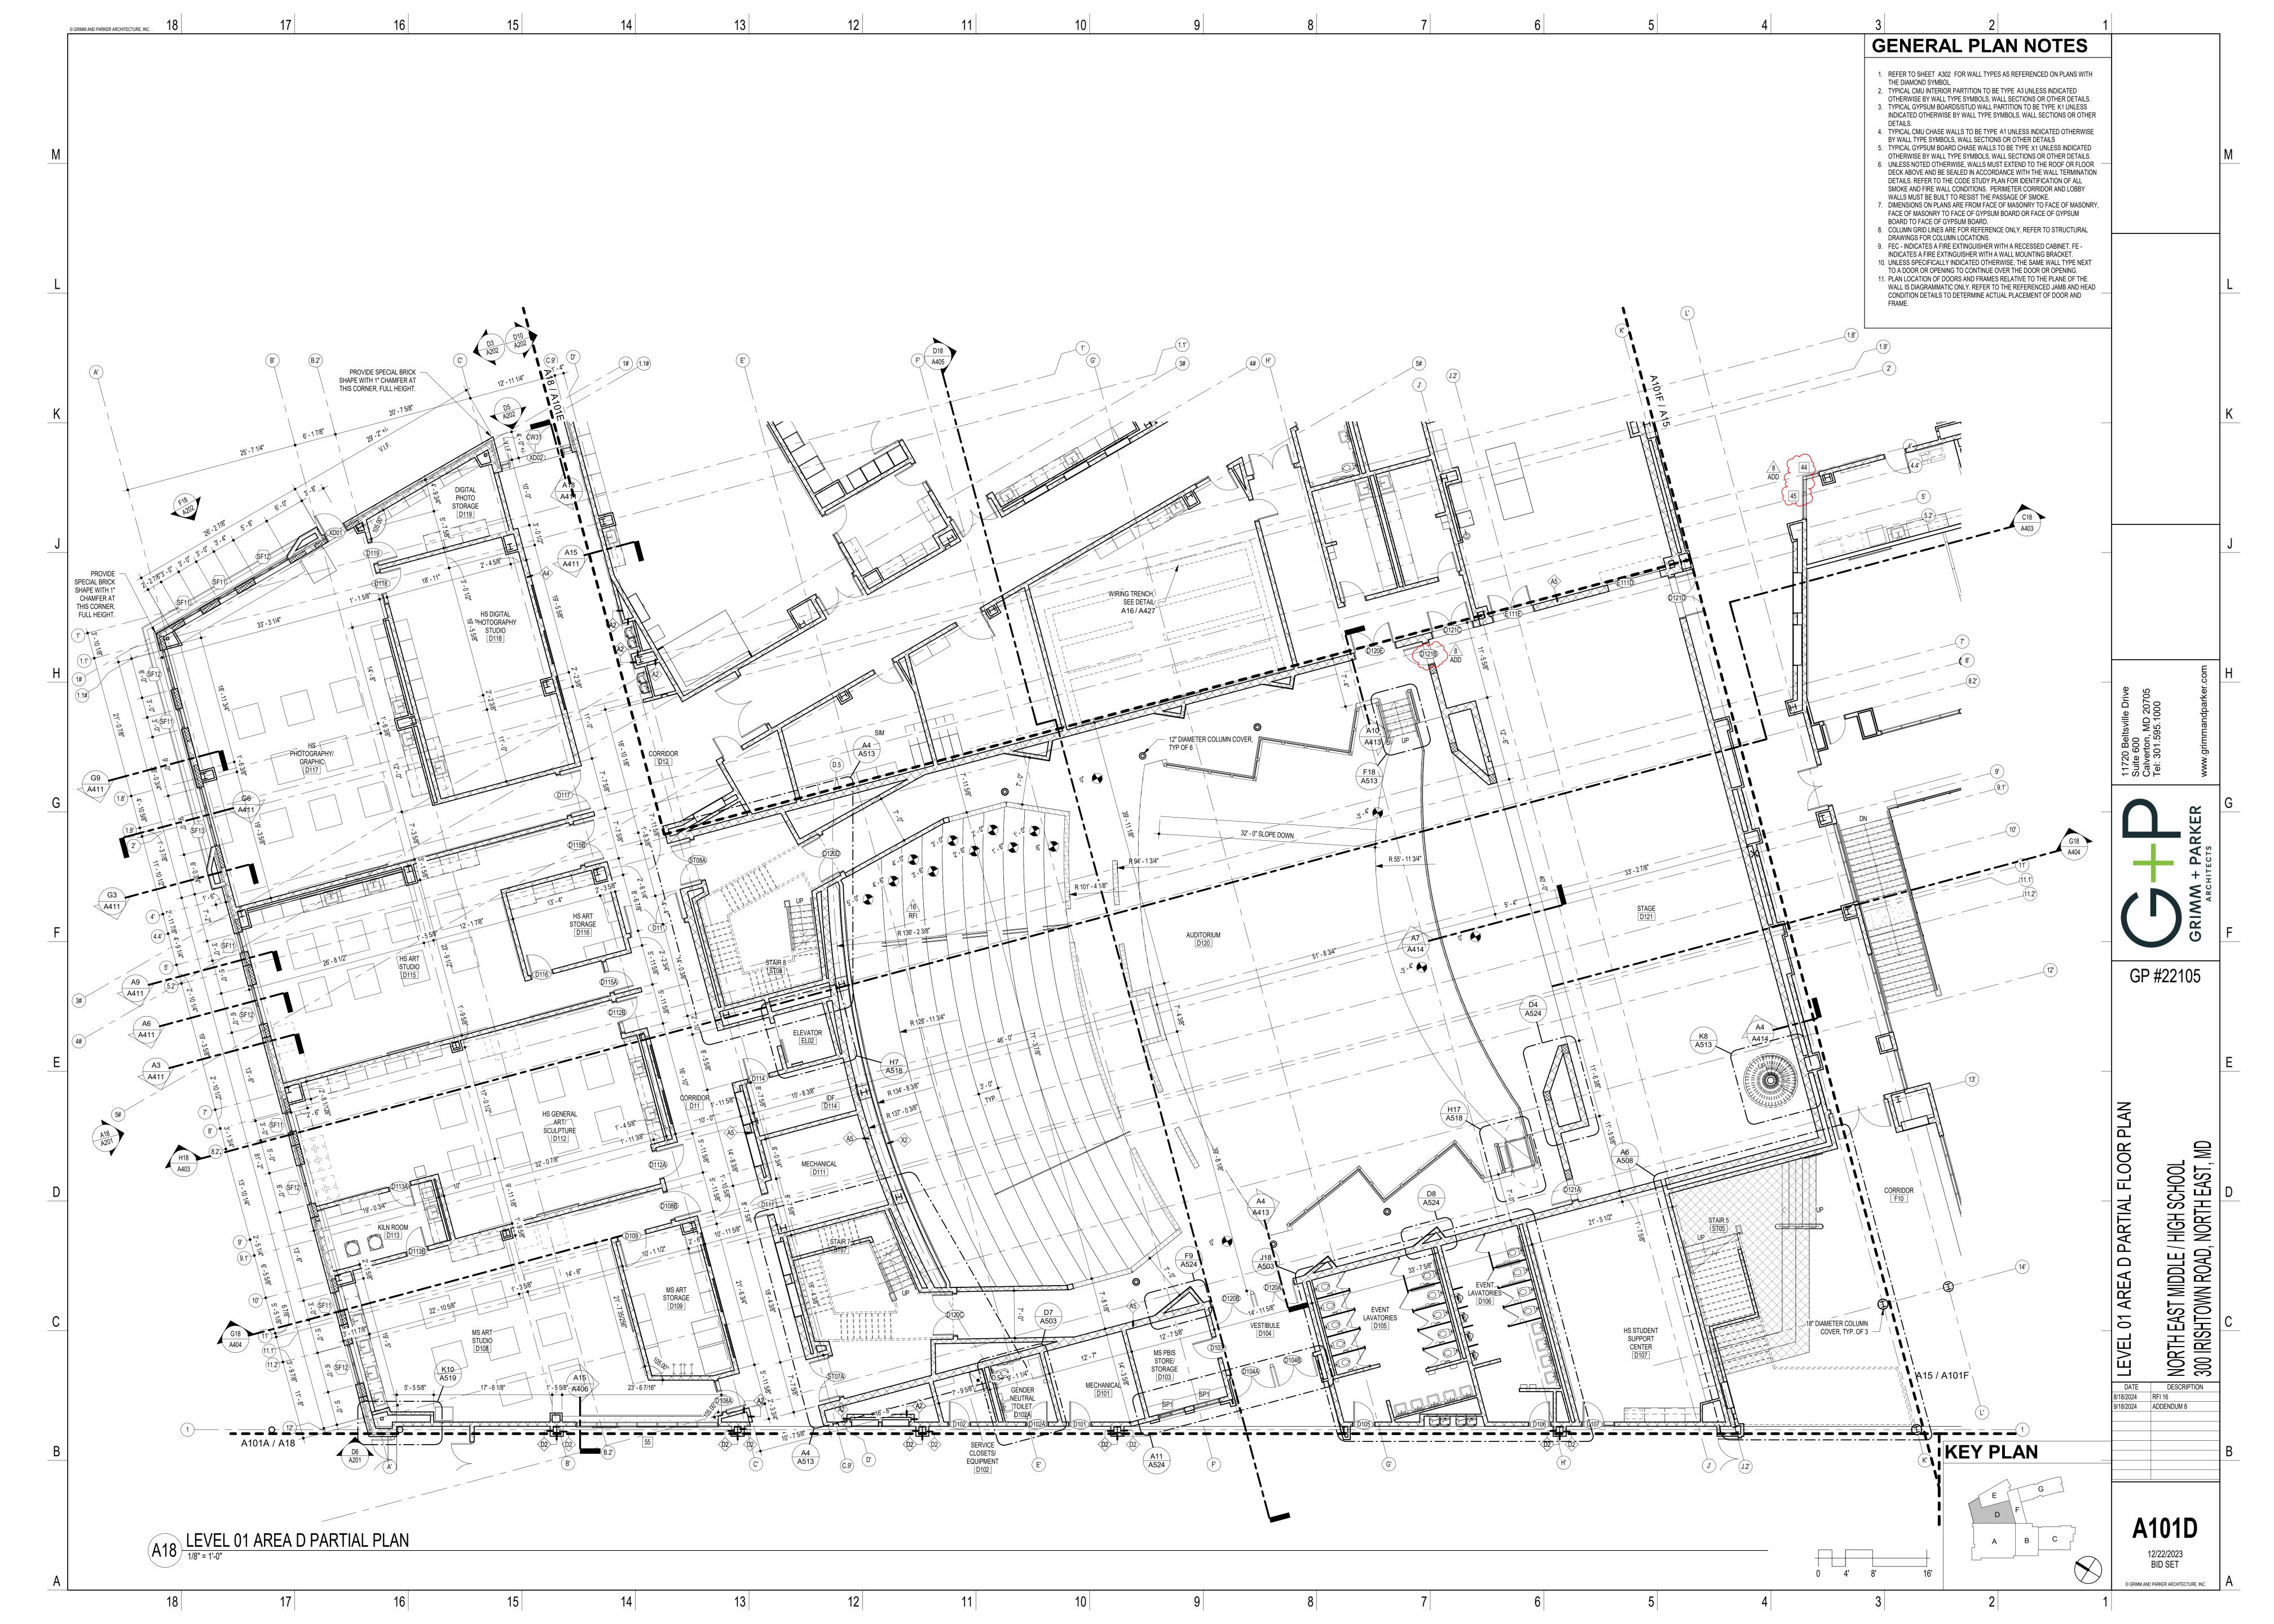





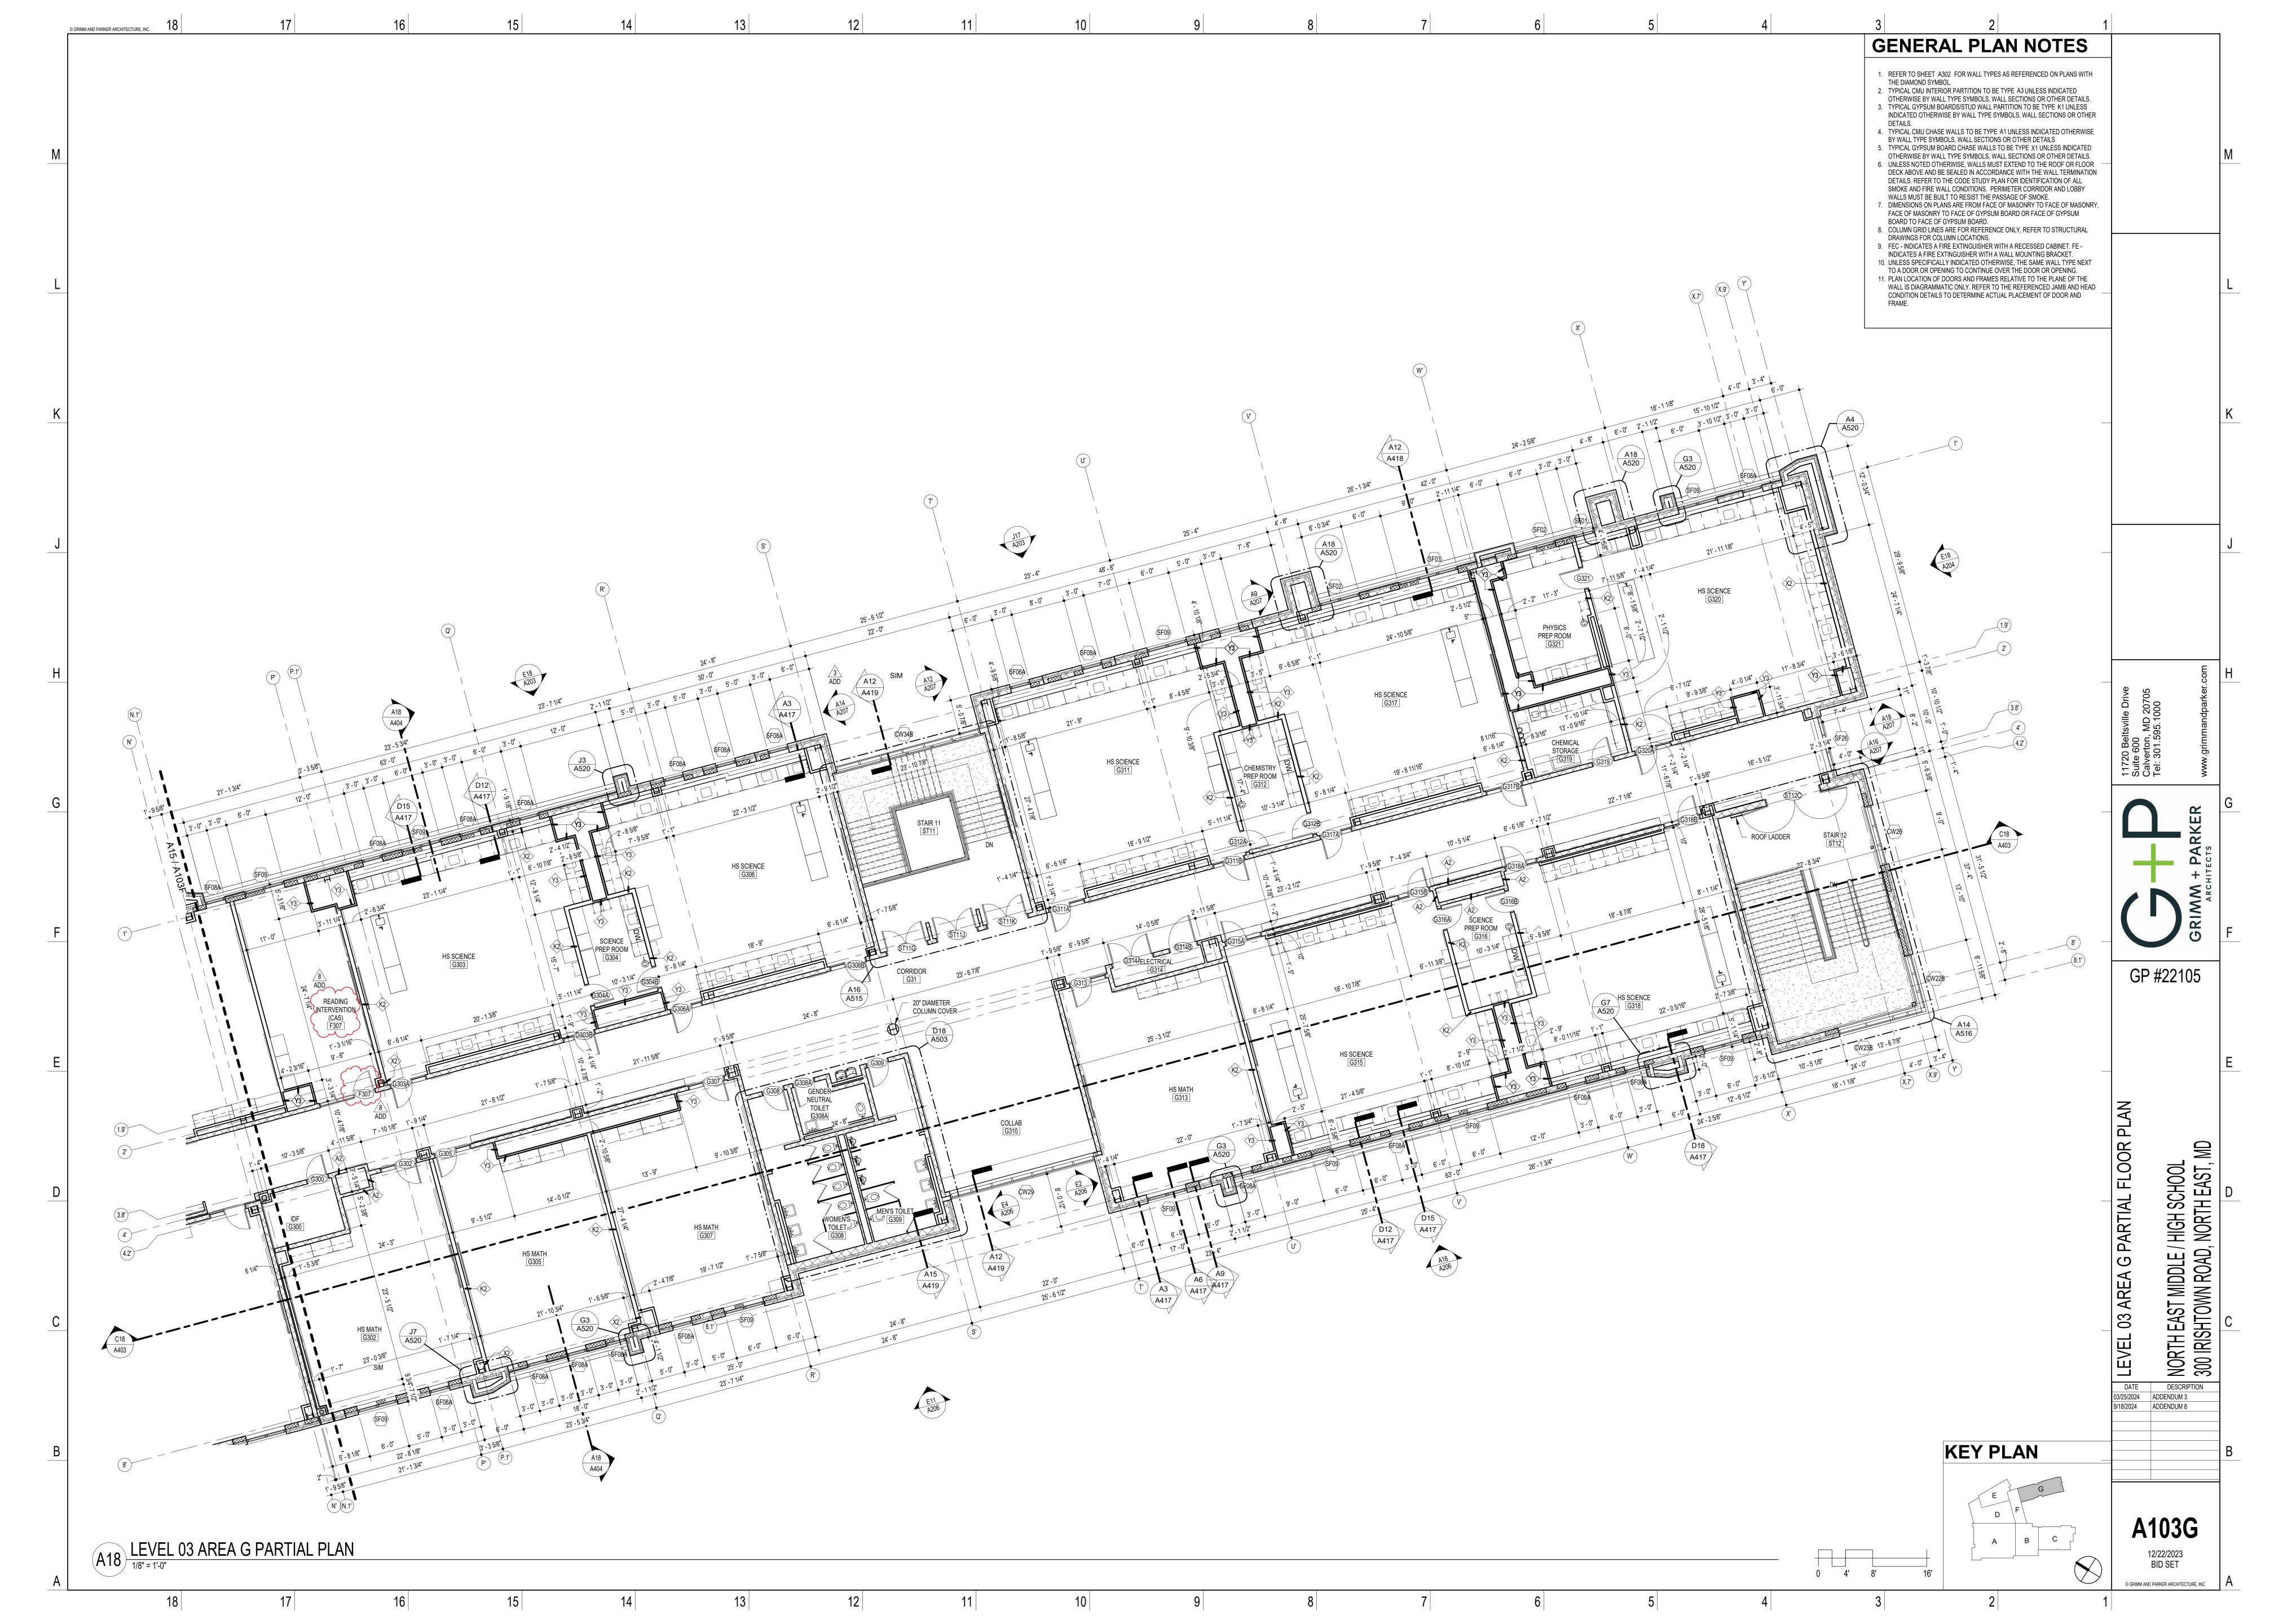

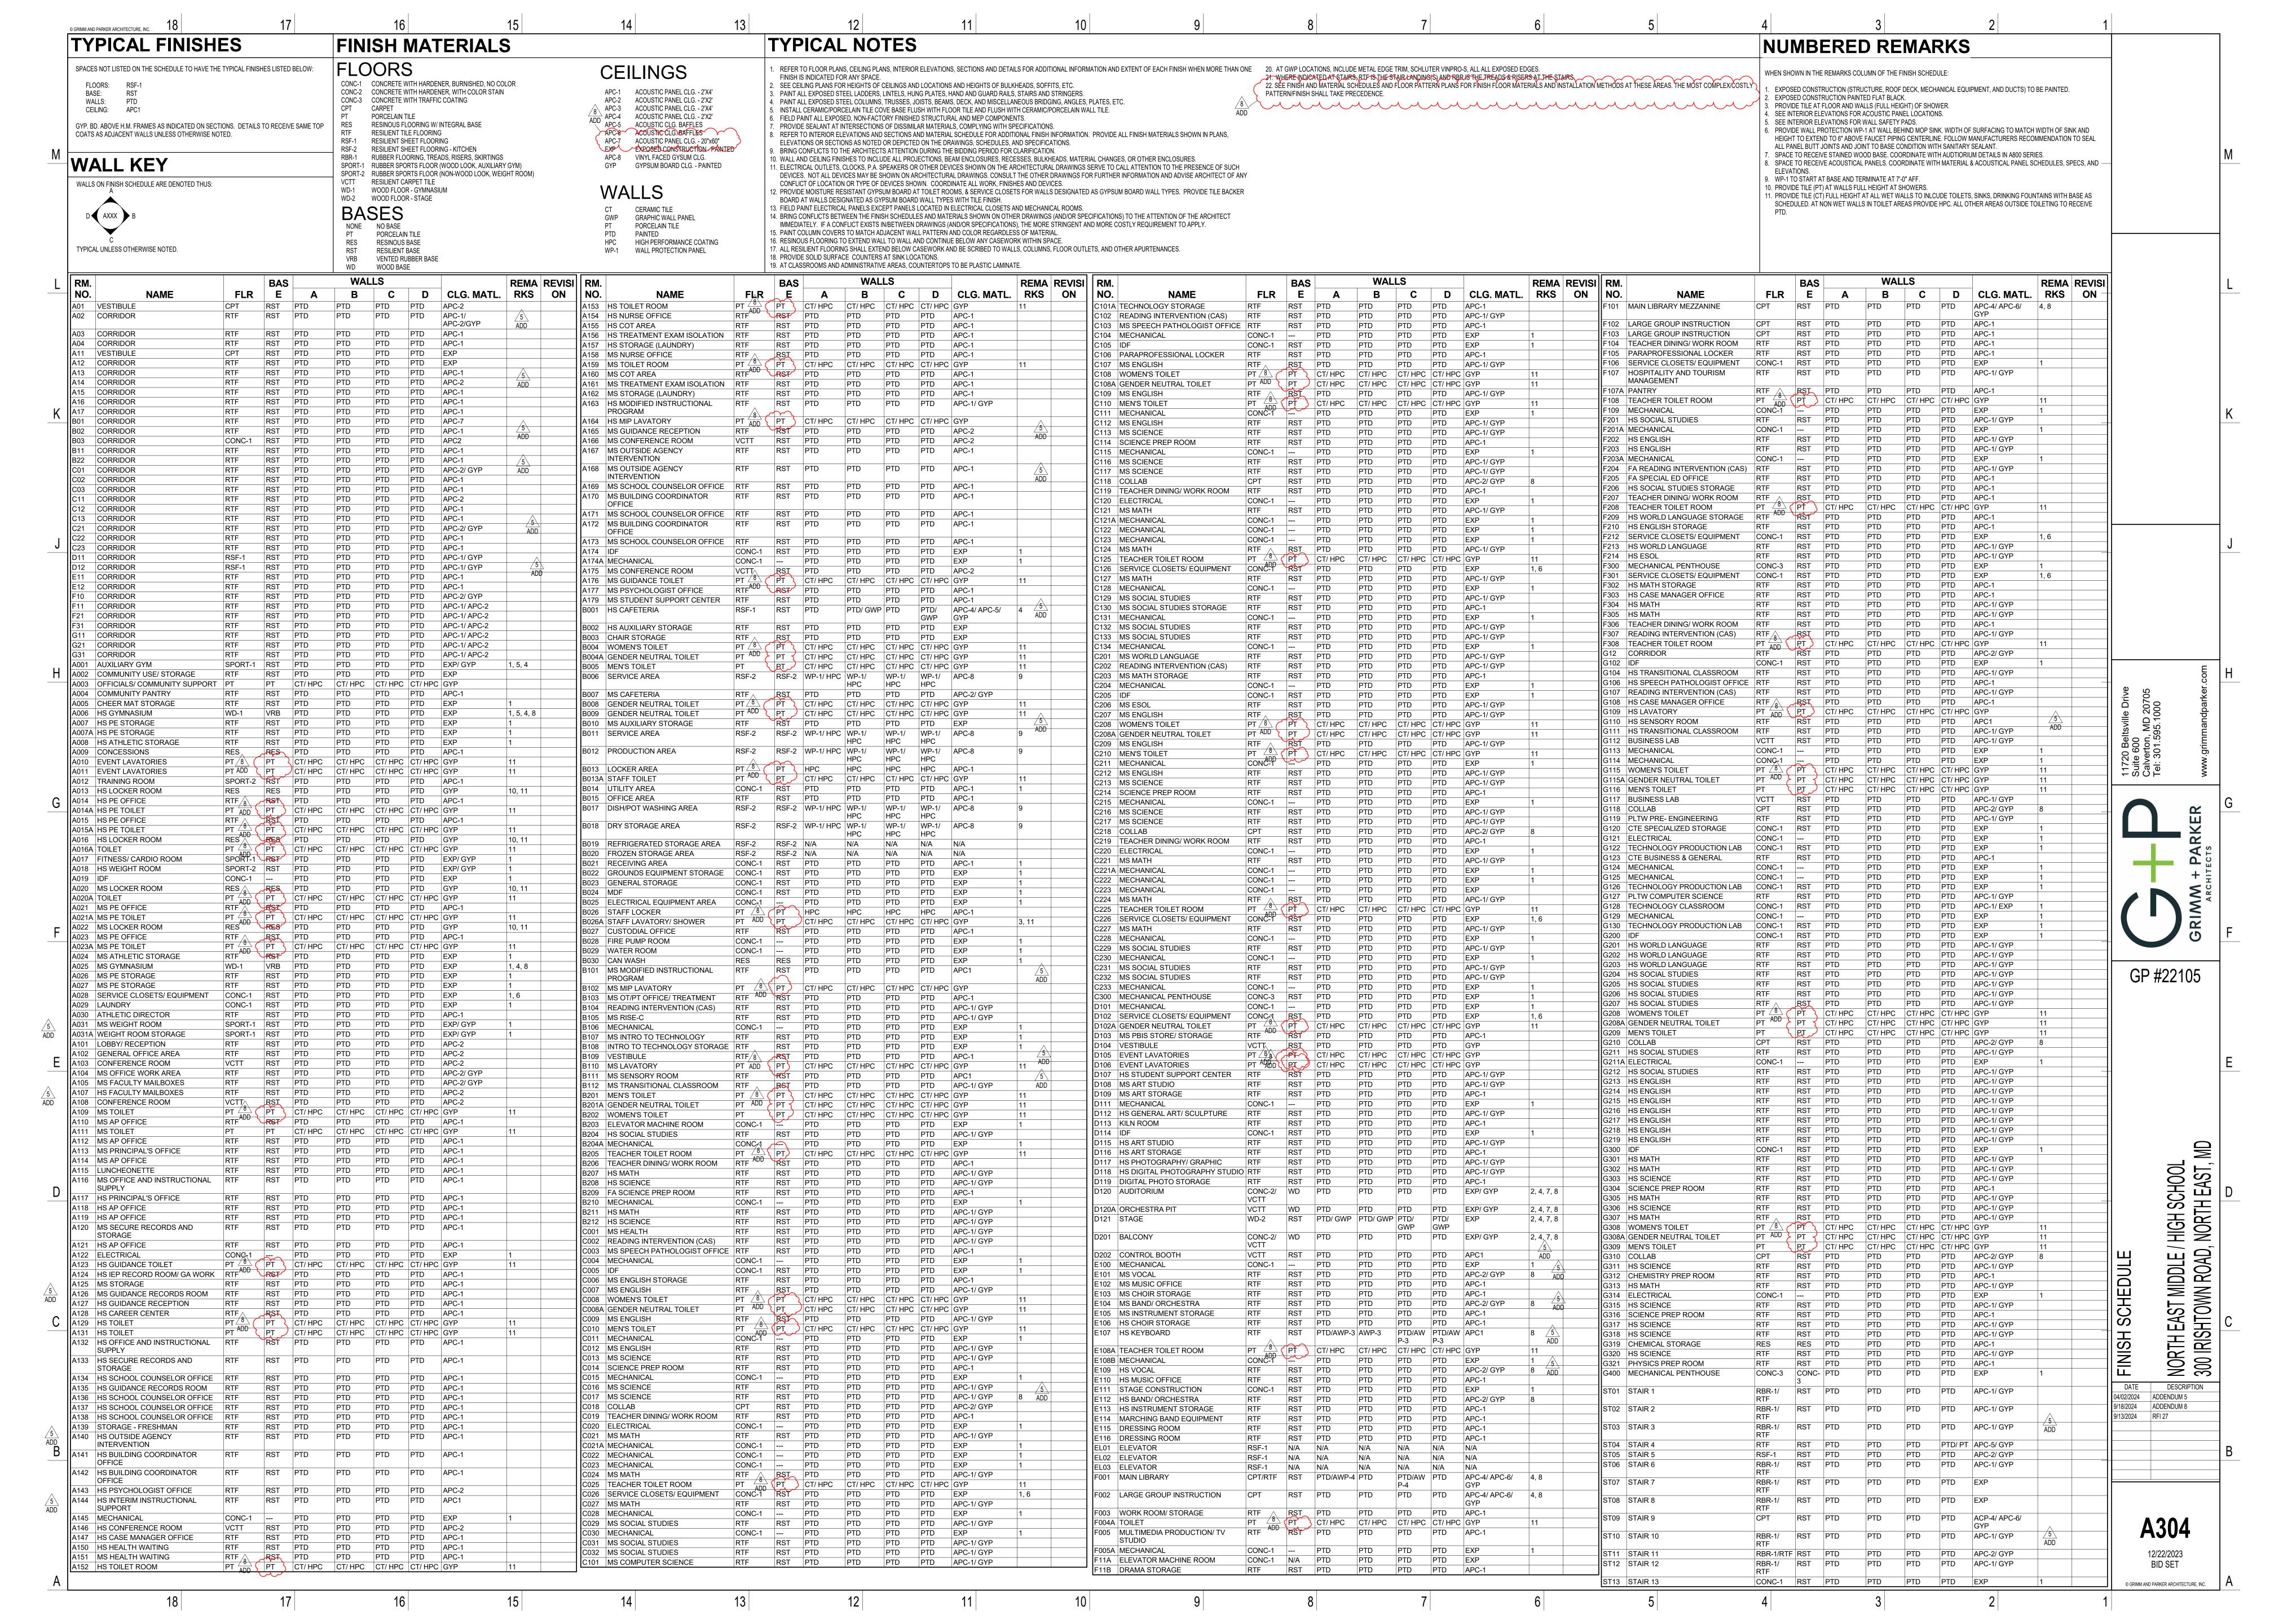

<u>©</u>	RIMM AND PARKER ARCHIT	ITECTURE, INC. 18	17	16	15	14		13	12 11		10	9	8	7	6	5 4	3	2	1
			INTERIOR MATERIALS			GHP GRIMMA AND PARKER		Acoustical Wall Panels, Fabric Wrapped &Tackable Location: Corridors, Collabs, and See	Per Specifications <b>Fabric</b> : Pallas Pattern: Rattan Color: Alamode 28.069.011				WP-1	Wall Protection Panel Location: Stairwells & Kitchen and Kitchen Support Spaces	Collection: Puraguard Color: Salt	Installation: See drawings for specific stairwell locations. Minimize seams, railroad product if needed to			
	20 November Spec. Code		Manufact. Color / Finish	Size	Installation / Remarks			Elevations for Other Areas  Acoustical Wall Panels, Fabric  Wrapped &Tackable Location:	Per Specifications Fabric: Pallas Pattern: Rattan Color: Straw				WD-3	Wood Stained Top Cap	Per Specifications - stained wood to	decrease seam quantity.			
		Concrete with Hardener,	See Specifications Section				AP-6C	Corridors, Collabs, and See Elevations for Other Areas Acoustical Wall Panels, Fabric	28.069.081  Per Specifications Fabric: Pallas				WD-5		match doors  Per Specifications - stained wood to				
M	!	Burnished, No Color Location: IDF, MECH, ELEC, Service Closets/ Equipment, Laundry, Fire Pump, Water, Can	03 3546.23					Wrapped &Tackable Location: Corridors, Collabs, and See Elevations for Other Areas	Pattern: Rattan Color: Glacier 28.069.072			at the second and the second are the second and the second and the second and the second are the	CEILINGS	Location: Auditorium	match doors				
141	1	Wash, Elevator Machine, HS & MS PE Storage, HS Athletic Storage, Grounds Equipment						Main Circulation Spaces, All Spe	Product: TFC Series 90 degree #TFC cialties Color: TBD covyn	Height: To start 6" AFF and Terminate at 7'-0" AFF Leg	e		APC-1	Accoustic Panel Ceiling 1  Location: Overall Ceiling Tile - Corridors, Admin Spaces,	Product: Ultima Square Lay-In #1913, Color: White, Texture: Fine, Grid Size: 15/16"				
		Storage, Grounds Equipment Storage Rooms, CTE and Tech Labs as Scheduled						Main Circulation Spaces, All Spec	nstruction Product: TFC Series 'U' Shaped End ecialties Cap #TFCH Color: TBD	AFF and Terminate	e e		APC-2	Accoustic Panel Ceiling 2 Location: Vestibules and Entry Corridors, Specialty Corridors,	Product: Ultima Square Lay-In 24" by 24" #1910, Color: White, Texture: Fine, Grid Size: 15/16"				
		Concrete with Hardener, with Color Stain Location: Auditorium & Balcony	See Specifications Section 03 3546.23; Stain Color TBD				CT-1A	Areas w/ Gypsum Walls  Ceramic Tile Location: Toilet Room Wet Walls, Drinking	tile Collection: Color Wheel Linear Color: Matte Biscuit K775	at 7'-0" AFF Leg Width: 2" 4"x12"	Installation: Horizontal Grid, UON		$\frac{1}{2}$	Production Service Area & Production, MS Cafeteria Accent, Collab Areas,					
	CONC-3	at Seating Areas Only, Orchestra Pit Concrete with Traffic Coating	See Specifications Section	+			CT-1B	Fountains  Ceramic Tile Location: Toilet  Room Walls, Drinking Fountains,		4"x12"	Installation: Horizontal Grid, UON			Lobby/Reception Areas, Band & Vocal Classrooms					
L	CPT-1	Carpet Planks Location: Mechanical Penthouse  Carpet Planks Location: Media Center - Field	07 1800  Interface Beaumont Range Collection Carpet Pattern: Mantle Rock Color: Nick	I	Installation: Ashlar		CT-1C	Shower Walls  Ceramic Tile Location: Toilet Room Walls, Drinking Fountains	tile Collection: Color Wheel Linear Color: Sea Breeze 1174 (Gloss)	4"x12"	Installation: Horizontal Grid, UON		APC-3	•	Product: Optima Square Lay-In #3153PB, Color: White, Texture: Fine, Grid Size: 15/16", Sound				_   <u>L</u>
		Tile  Carpet Planks	Stone  Interface Beaumont Range Collection	50CM x 50CM	Installation: Non-Directional		CT-1D	Ceramic Tile Location: Toilet Dalt Room Wet Walls, Drinking	tile Collection: Color Wheel Linear Color: Architectural Gray 0109	4"x12"	Installation: Horizontal Grid, UON		APC-4	-	Rating: 0.95 NRC  Product: Optima Square Lay-In 24" by 24" by 1" #3152PB, Color: White, Texture: Thick Fine, Grid Size: 15/16", Sound				
	1	Location: Media Center - Main Accent Neutral Texture; Mezzanine Enclosed Spaces	_	l Planks				Fountains  Ceramic Tile Location: Toilet Dalt Room Wet Walls	(Gloss)  tile Collection: Color Wheel Linear Color: Artic White 0190 (Gloss)	4"x12"	Installation: Horizontal Grid, UON		APC-5	Accoustic Ceiling Baffles Frasch	Rating: 0.95 NRC  Blade BAFL Acoustical Ceiling Baffle  Thickness: 9mm, Length: Varies,	Installation: Provide Unistruct for attachment and support of			
		•	Interface Beaumont Range Collection Carpet Pattern: Rock Springs Color: Nick Gneiss		Installation: Ashlar			Ceramic Tile Location: Toilet Room Wet Walls Ceramic Tile Location: Toilet Dalt	tile Collection: Color Wheel Linear Color: Matte Artic White 0790 tile Collection: Color Wheel Linear	4"x12" 4"x12"	Installation: Horizontal Grid, UON Installation: Horizontal Grid, UON			I I	See Plans, Acoustic PET Felt Color: Denim 19, Attachment Method: Unistrut with Cable Mounting	acoustical baffles. Unistrut to be attached to structure above.			
K	CPT-4	Carpet Planks Location: Media Center - Third	Interface Collection TBD Pattern: TBD Colo Carpet TBD	r: 25CM x 1M Planks	Installation: TBD		GWP-1 (Custom	Room Wet Walls	color: Matte Sea Breeze 7174  ni Panels Steni Vision - Exact Custom Graphic TBD, Assume Minimum 6 Colors,	1195mmx850mm			APC-6	I I	Blade BAFL Acoustical Ceiling Baffle  Thickness: 9mm, Length: Varies,				K
	CPT-5	Accent Color  Carpet Planks - Walk Off Mat		8 24" x 24"	Installation: Monolithic			Main Street ("The Boardwalk")  NOT USED  Graphic Wall Panel Location: Ster	ni Panels Steni Vision - Solid Color, Exact	1195mmx850mm	Location  See Elevations and Plans for Exact				See Plans, Acoustic PET Felt Color: Denim 19, Attachment Method: Unistrut with Cable Mounting				
		Location: Vestibules  Carpet Planks - Walk Off Mat	Color: Winter Gray 19103  Interface Collection: Step Repeat Pattern:	EOCM v EOCM	Installation: Non-Directional		Color) GWP-4	1 '	Color TBD  ni Panels	1195mmx850mm			APC-7	Main Stair and Circulation Path	Product: Optima Square Lay-In 20" by 60" by 1" #3156, Color: White, Texture: Fine,	perpendicular (crosswise) to the			
			Carpet SR999 1388702500 Color: Iron 104944	SOCIVI X SOCIVI	installation: Non-Directional		Pattern) PT-2		Oak White Surface: Matt tile Collection: Volume 1.0 Color: VL72	12"x24"	Dimensions and Install Patterns and Locations  Installation: Horizontal Running		 	('The Boardwalk') to Courtyard at HS Dining ADD	Grid Size: 15/16", <b>Sound Rating:</b> 0.95 NRC	walkway.			
			Interface Collection: Open Air Pattern: 404 Carpet Accent Color: 107139 Carribean	4 50CM x 50CM	Installation: Non-Directional		PT-3		Intensity Pebble  Collection: Resin Colors Color: terials Denim Matte(Rectified)	12"x24"	Installation: Vertical Running Bond		EXP	Exposed Ceiling, Painted Location: Per Finish Schedule	TBD	Confirm paint colors for each area with architect prior.			
		Porcelain Tile Location: Toilet Rooms, Event	Daltile Collection: Volume 1.0 Color: VL Intensity Pebble	72 12"x24"	Installation: Running Bond; Areas with Porcelian Tile Floor to Receive		RES-1	Learning Stairs HS Dining Corp Resinous Flooring Integral Base Stor Location: Locker Rooms and	rporation Innetec Collection: TRF Flakes Color: TBD		Intergral Base to Match Resinous Flooring at Specified Area		APC-8	Panels Location: Kitchen	See Specifications, Color: White  Colors TBD				
		Lavatories, Officials/ Community Support Room, HS & MS PE Toilets, Lavatories, Custodial			Porcelain Tile Base		RSF-2	Resilient Flooring Integral Base Location: Kitchen and Kitchen	Product: Stronghold 30 Color: Cannon K30911	Roll Goods			-	Location: Per Finish/Material Schedule and Locations	COIOTS TBD				
		Office, Staff Lavatory/Shower at Custodial, Staff Locker at Custodial					HPC	Support Spaces  High Performance Coating  Location: Per Specifications and	Per Specifications				SOLID SUI	RFACE and LAMINATES  Solid Surface 1 DuPont Corian	Color: TBD				
<u>H</u>		Quartz Tile Overall Field 33% at Corridors Location: Corridors and Overall	Kahrs Collection: Quartz Lines Color: Upofloors 8202 Conglomerate Grey	12"x24"	Installation: Exact Pattern TBD. Assume multicolor pattern per locations listed			Finish Schedule - Toilet Rooms (non-wet walls) / Kitchens/ Locker Rooms						Location: Toilet Room Counters, Admin and Media Countertops and Desks, Counters at all Sink					g H
	RTF-2	Circulations Spaces, MS Dining  Quartz Tile	Kahrs Collection: Quartz Lines Color:	12"x24"	Installation: Exact Pattern TBD.		-	Location: Walls At Media Center Overlook Corridor, Walls at HS	Film Frosted Film Band, Max 3'-0" wide, Centered Vertically on Glass, Exact Pattern and Design to be		Installation: See Specifications for Exact Product, Substrate Prep, and Installation Requirements		PLM-1A		Pattern and Color: Mission Maple				20705 20705 300 4parker.
	1	<b>Location:</b> Corridors and Overall Circulation Spaces, Classrooms ,	Upofloors 8214 Quartz Thunder		Assume multicolor pattern per locations listed			Dining Overlook Corridor	Combination of Linear Pattern and Words TBD. To Include Three Level of Semi-Translucent/ Colored Frost	S				Wood Look Laminate Plastic Laminate	7990-38 Fine Velvet Finish				Seltsville 30 30, MD 1.595.10
	RTF-3	Admin Spaces, MS Dining  Quartz Tile  Overall Field 33% at Corridors	Kahrs Collection: Quartz Lines Color: Upofloors 8203 Gabbo Grey	12"x24"	Installation: Exact Pattern TBD.		FLM-1B	Decorative Film on Glass 3M Location: Corridor Glass Walls at MS & HS Fitness and Weight	Film To be Large Scale Text Letters as Shown on Elevations. Text to Vary by Location, Exact Phrases TBD. To		Installation: See Specifications for Exact Product, Substrate Prep, and Installation Requirements		PLM-1B	Plastic Laminate 1 Wilsonart Typical at Casework; Classroom Plastic Counters - Non Wood Look & Laminate	Pattern and Color: Sabbia Tessere 5051-60 Matte Finish				Suite 60 Calvert Calvert Tel: 30°
G		Location: Maker Space at Media, Corridors & Overall Circulation,	oponoors 8203 Gabbo Grey		Assume multicolor pattern per locations listed			Rooms, Career Center	be Semi-Translucent Frost (white o grey frost color).  Film Frosted Film Band, Max 3'-0" wide,	r	Installation: See Specifications for		PAINT	Other Areas As Scheduled					G
		Hybrid Resilient Flooring Location: Conference Rooms (with Electrical Boxes), Principal	Tarkett Product: Tarkett Powerbond Hyb Carpet/Resilent Pattern: TBD Color: TBD	orid Roll Goods				Location: Meeting Room Walls at Media Center Mezzanine	Centered Vertically on Glass, Exact Pattern and Design to be Linear Pattern TBD. To Include Three		Exact Product, Substrate Prep, and Installation Requirements		PTD-2	Paint Color 1 Sherwin Overall Wall Color Williams Paint Color 2 Sherwin	SW 7035 Aesthetic White SW 7016 Mindful Gray	To include one accent wall per office		1	
		& Assoc. Principal Offices, Auditorium Circulation & Balcony Areas Only, Auditorium					FLM-2A	Decorative Film on Walls 3M	Levels of Semi-Translucent Frost  Film Opaque Film with custom Graphic		Installation: See Specifications for		-	Neutral 2 - Doorframes, Accent Wall at Admin Offices	SW 7010 Mindful Gray	conference rooms, and break rooms			PAR
		Vestibule Rubber Flooring - Treads, Risers, Skirtings	Roppe Product: Rubber Tread with Integrated Risers and Abrasive			和中国的 · men 144 福建区管辖地址计划。 · · · · · · · · · · · · · · · · · · ·	1	Location: Wall Applied Murals - See Elevations for Locations, Including but not Limited to	Mural. At Each Location Graphic to be Unique, For Each Assume Minimum 8 colors, Design TBD		Exact Product, Substrate Prep, and Installation Requirements		PTD-3	Paint Color 3 Sherwin Accent Color Neutral 1 - Wall Accent at MS Wing Corridors,	SW 7654 Lattice	To include one accent wall per classroom. Corridor Walls at MS Wing, All Levels.			ARCHII +
_	,	Location: Egress Stairs & Auditorium Stairs  Resilient Tile Flooring (Biobased	Contrast Strip Texture: Smooth Color: TBD Abrasive Strip Color: TBD Matter Purline XL Planks Color: Royal	10" x 59" x 2.5mm	Installation: Random Staggered		~~~	Decorative Film on Walls Location: Wall Applied Murals -	Film Opaque Film with custom Graphic to Include Two Colors - one for field	d	Installation: See Specifications for Exact Product, Substrate Prep, and		PTD-4	Acoustical Panels, Accents at Various Bulkheads	SW 7658 Gray Clouds	To include one accent wall per			
-		Resilient) Location: Main Entry Corridor ('The Boardwalk'), HS Main	Surfaces Chestnut Grey Purline	XL Planks	Planks, See Floor Pattern Plans for Locations; To Perpendicular (Crosswise) Length of Corridor, At		8 ADD	See Elevations for Locations, Including but not Limited to Entrances at Middle School and	and one for Lettering/ Numbers. Each Location to have Unique Wording and Characters		Installation Requirements			Accent Color Neutral 3 - Williams Classroom Accent, Acoustical Panels		classroom			
		Dining Main Stair Treads, and Dining Path to Exterior Courtyard			Stairs to run across the Treads, At Learning Stairs to Continue direction from Stair & On Risers to Run		<b>}</b>	Middle School Corridor at Level 02 Resilient Base Rop	ope <b>Color:</b> TBD		Installation: Continuous Roll Goods		PTD-5	Paint Color 5 Sherwin Accent Color Neutral 4 - Williams Acoustic Panels, Wall Accent at	SW 9170 Acier				GP #22105
	Spec. Code		Manufact. Color / Finish	Size	Installation / Remarks	Image	VRB	Location: Overall Wall Base, UON Vented Rubber Base	See Specifications, <b>Color:</b> Black		Installation: Continuous Roll Goods		PTD-6	MS & HS Entries  Paint Color 5 Sherwin  Accent Color - MS Collab Williams					
_		Resilient Sheet Flooring (Biobased Resilient) Location: HS Dining B001 and Areas B02, C01, D11, and	Grey Stars (non-wood look)	65'-7" Wide Rolls x 65'-7" Long x 0.09" Thickness	Installation: At Stairs to be Trads & Risers			Location: Gym and Stage  Tack Panel Location: Tackable Surface at	roseal Product: TAC-WALL Color: Harbor C250-06	Roll Goods	Installation: See Elevations for Locations				Color / Finish Size	Installation / Remarks	Image		
		circulation space adjacent to Stair 5, Art Corridorm HS Dining Stairs to Gym Entry (non-					WC-1		tional Product: LEVEL Mural Type II Vinyl	Roll Goods	Installation: To be installed with		PTD-7	Paint Color 5  Accent Color - School Color Blue, Acoustical Panels, Corridor Accent F11, Main Street	Custom Match to School Color Blue (Bright Blue)				
		egress), Upper Stair & Platform Steps Resilient Sheet Flooring	Purline Rolls Pattern & Color:	6'-7" Wide Rolls x				Location: MS Entry 00 Wal	Pattern Number TBD- Custom PT3, To Go Wall to Wall and Floor to	5	Manufacturer Approved Adhesives and Manufacturer Approved Skim Coat Wall Products and Finish.		PTD-8	Rulkhead Paint Color 5 Accent Color - Green 1, Media Williams	TBD	To include one wall			
	· 1	(Biobased Resilient) Location: Contrast bands at Main Street & HS Dining	Mindnight Grey (non-wood look)				WC-2	Wallcovering Mural Nati	Ceiling UON on Elevations tional Product: LEVEL Mural Type II Vinyl	Roll Goods	Contractor to verify skim coat material, adhesive and wallcovering are all compatible.  Installation: To be installed with	3		Gyp Frame/Wrap at Mezzanine Level, Acoustical Panels, Collab Bulkheads Levels 0 & 2					
		Resilient Sheet Flooring Location: Kitchen and Kitchen Support Spaces	Altro Product: Stronghold 30 Color: Cannon K30911	Roll Goods				_	Illcovering Wallcovering Design Pattern: JC/55 Pattern Number TBD- Custom PT3, To Go Wall to Wall and Floor to	5-	Manufacturer Approved Adhesives and Manufacturer Approved Skim Coat Wall Products and Finish.		PTD-9	Paint Color 5 Accent Color - Green 2, Media Accent, Acoustical Panels, Collab	TBD	To include one wall			100L AST, N
<u>D</u>		Resinous Flooring Location: Locker Rooms, Concessions, and Chem Storage	Stonetec Collection: TRF Flakes Color: TBD		Installation: With Intergral Base				Ceiling UON on Elevations		Contractor to verify skim coat material, adhesive and wallcovering are all compatible.	3	PTD-10	Bulkheads Levels 1 &3  Paint Color 5 Sherwin Accent Color - Blue 1, Acoustical Williams	TBD	To include one wall			15CH
	SPORT-1	Rubber Sport Flooring - Wood Look	PLAE Product: Exceed Color: Maple	Roll Goods 6' Wide 12mm Thickness	·,		WC-3		Product: LEVEL Mural Type II Vinyl Illcovering Wallcovering Design Pattern: JC/55 Pattern Number TBD- Custom PT3,	Roll Goods	Installation: To be installed with Manufacturer Approved Adhesives and Manufacturer Approved Skim		PTD-11	Panels, MS&HS Entries & Collab at Level 0 Paint Color 5 Sherwin	TBD	Exact Areas to be Determine - to			JLE / HIGH SC , NORTH
		Location: Wood Look - Auxiliary Gym, Fitness/Cardio Room							To Go Wall to Wall and Floor to Ceiling UON on Elevations		Coat Wall Products and Finish.  Contractor to verify skim coat material, adhesive and wallcovering are all compatible.	3		Accent Color - Blue 2, Acoustical Williams Panels, MS&HS Entries & Collabs & HS Stairs at Level 1		include one wall at collab space and one Interior Wall at Stairs			HEDU PDLE /
	ľ	Rubber Sport Flooring - Non- Wood Look Location: HS & MS Weight	NWR Product: ReAction Color: 675 Put	ty			WC-4	ū	tional Product: LEVEL Mural Type II Vinyl Illcovering Wallcovering Design Pattern: JC/55 Pattern Number TBD- Custom PT3,	Roll Goods	are all compatible.  Installation: To be installed with  Manufacturer Approved Adhesives and Manufacturer Approved Skim		PTD-12	Paint Color 5 Sherwin Accent Color - Blue 3, Accent at Media, MS&HS Entries, Collabs	TBD	Exact Areas to be Determine - to include one wall at collab space and one Interior Wall at Stairs			ST MIC
C	WD-1	Room, Training Room  Wood Athletic Floor	Per Specifications						To Go Wall to Wall and Floor to Ceiling UON on Elevations		Coat Wall Products and Finish.  Contractor to verify skim coat material, adhesive and wallcovering	3	PTD-13	& HS Stairs at Level 2  Paint Color 5  Accent Color - Blue 4, MS&HS  Williams	TBD	Exact Areas to be Determine - to include one wall at collab space and			ERIAL SC TH EAST MI
	WD-2	Location: HS & MS Gymasium  Wood Floor Assembly  Location: Stage	Per Specifications - Sprung Floor					•	tional Product: LEVEL Mural Type II Vinyl Illcovering Wallcovering Design Pattern: JC/55	Roll Goods	are all compatible. Installation: To be installed with Manufacturer Approved Adhesives		DTD 11	Entries, Collabs & HS Stairs at Level 3	SW 6884 Graphlad	one Interior Wall at Stairs			MATE NORTE
	WD-3	Wood Stained Hardwood Veneer Location: Benches	Per Specifications - to be stained wood						Pattern Number TBD- Custom PT3, To Go Wall to Wall and Floor to Ceiling UON on Elevations		and Manufacturer Approved Skim Coat Wall Products and Finish. Contractor to verify skim coat		PTD-14	Paint Color 6 Sherwin Accent Color - Auditorium Wall and Stage Surround	SW 6884 Greenblack	(Black Paint)			DATE DESCRIPTION 9/18/2024 ADDENDUM 8
	WALLS + FILM AP-1	Acoustical Panels, Painted	Armstrong Tectum Wall Panels	Varies	Installation: Per Elevations, To Be		WC-6		tional Product: LEVEL Mural Type II Vinyl	Roll Goods	material, adhesive and wallcovering are all compatible. Installation: To be installed with Manufacturer Approved Adhesives		_	<u> </u>	<u>l</u>	<u> </u>		J	
В	AP-2	Location: Gyms, MS and HS Cafeteria, Vestibules Acoustical Panels, Designer Shapes Location: Main Street	Armstrong Tectum DesignArt 0.85 NRC/ C-46 Mounting Method Shapes/Color:		Field Painted Multiple Accent Colors  Installation:To be Field Painted to Match Sherwin Williams Paint Colors		-	Location: HS Corridor 03 Wal	Illcovering Wallcovering Design Pattern: JC/55 Pattern Number TBD- Custom PT3, To Go Wall to Wall and Floor to Ceiling UON on Elevations		Manufacturer Approved Adhesives and Manufacturer Approved Skim Coat Wall Products and Finish. Contractor to verify skim coat								В
	I I	Corridor, Upper Stair Feature Wall	Minimum of 6 Standard Shapes a 6 Sherwin Williams Colors, Colors to be Field Painted	ind	THE COLORS		WC-7	Wallcovering Mural Nati	tional Product: LEVEL Mural Type II Vinyl	Roll Goods	material, adhesive and wallcovering are all compatible.  Installation: To be installed with	3	-						
	1	Acoustical Panels, Fabric Wrapped Panels Location: Music Rooms, HS Dining	Per Specifications <b>Fabric:</b> Momentum Pattern: Proverb Col Buff	or:				_	Illcovering Wallcovering Design Pattern: JC/55 Pattern Number TBD- Custom PT3, To Go Wall to Wall and Floor to	5-	Manufacturer Approved Adhesives and Manufacturer Approved Skim Coat Wall Products and Finish.								A305
	1	Acoustical Wall Panels, Fabric Wrapped Location: Media Center	Per Specifications Fabric:  Momentum Pattern: Proverb Col  Buff  Per Specifications Manufacturer						Ceiling UON on Elevations		Contractor to verify skim coat material, adhesive and wallcovering are all compatible.	3							12/22/2023
Α	AP-5	Acoustical Convex Wall Panel Location: Music and Vocal Rooms - See Elevations	Per Specifications, Manufacturer Standard White			ı					ı	T			ı	,		ı	BID SET  © GRIMM AND PARKER ARCHITECTURE, INC.
		18	17	16	15	14		13	12 11		10	9	8	7	6	5 4	3	2	1

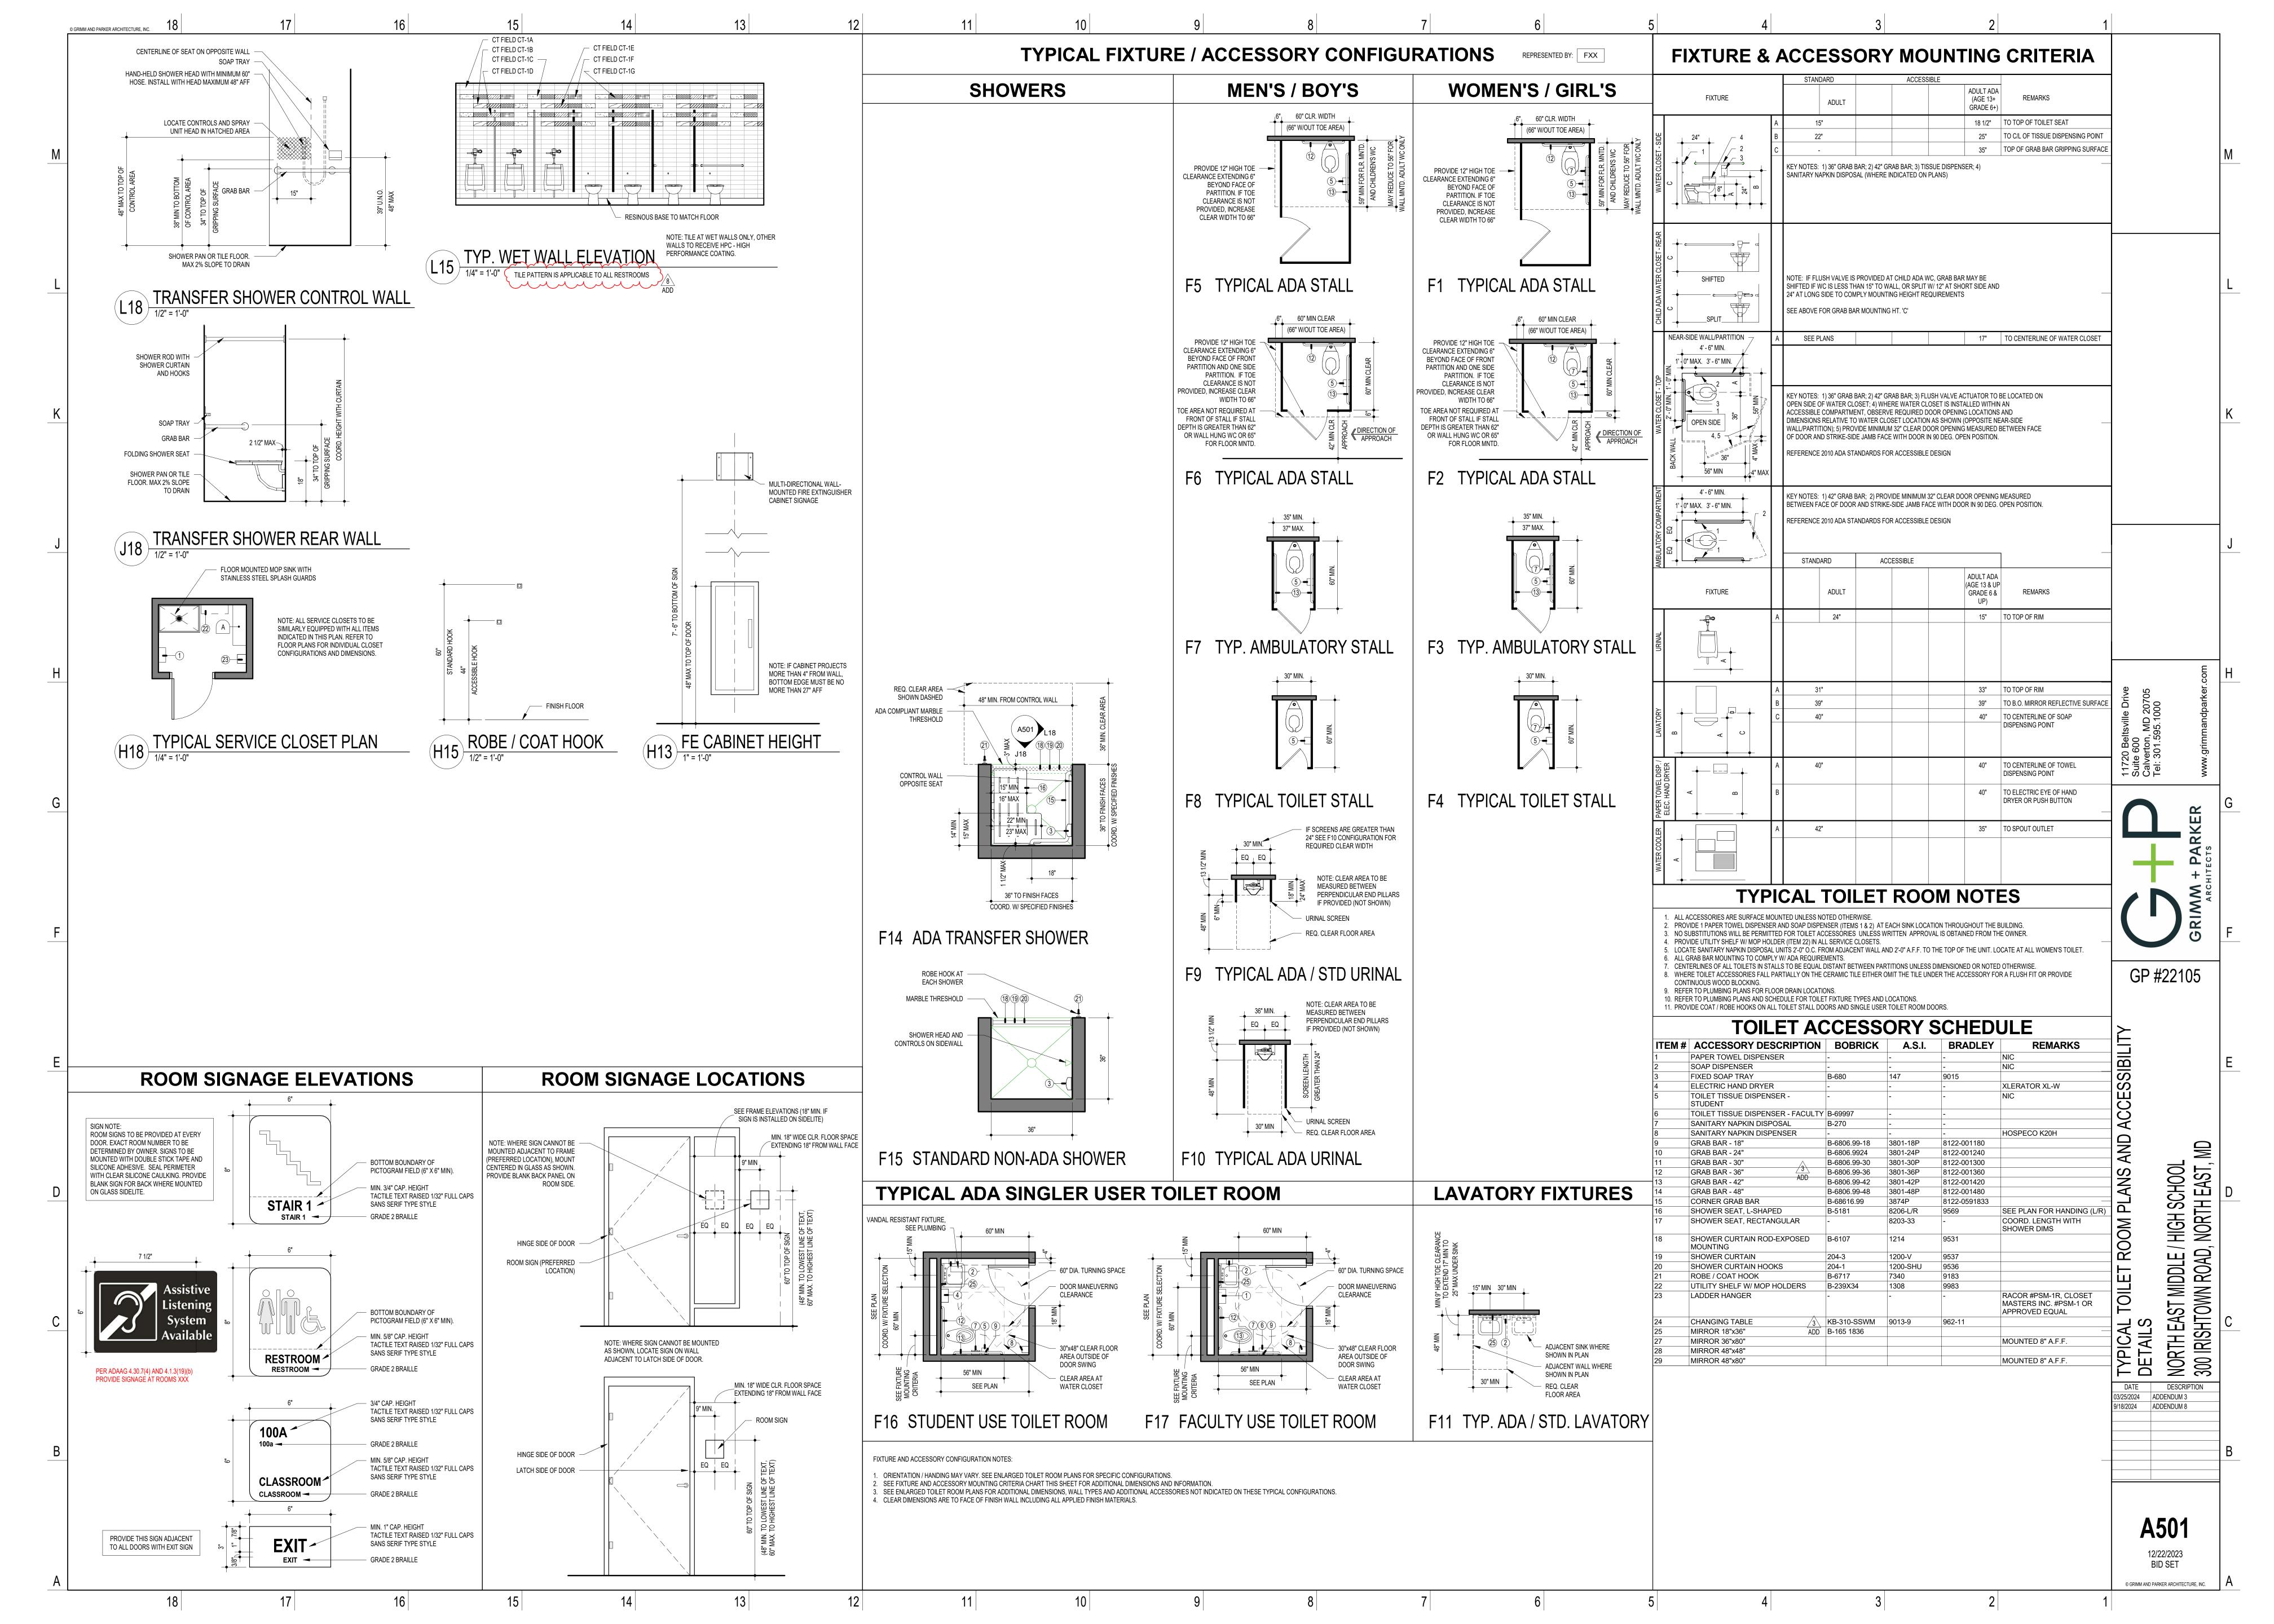

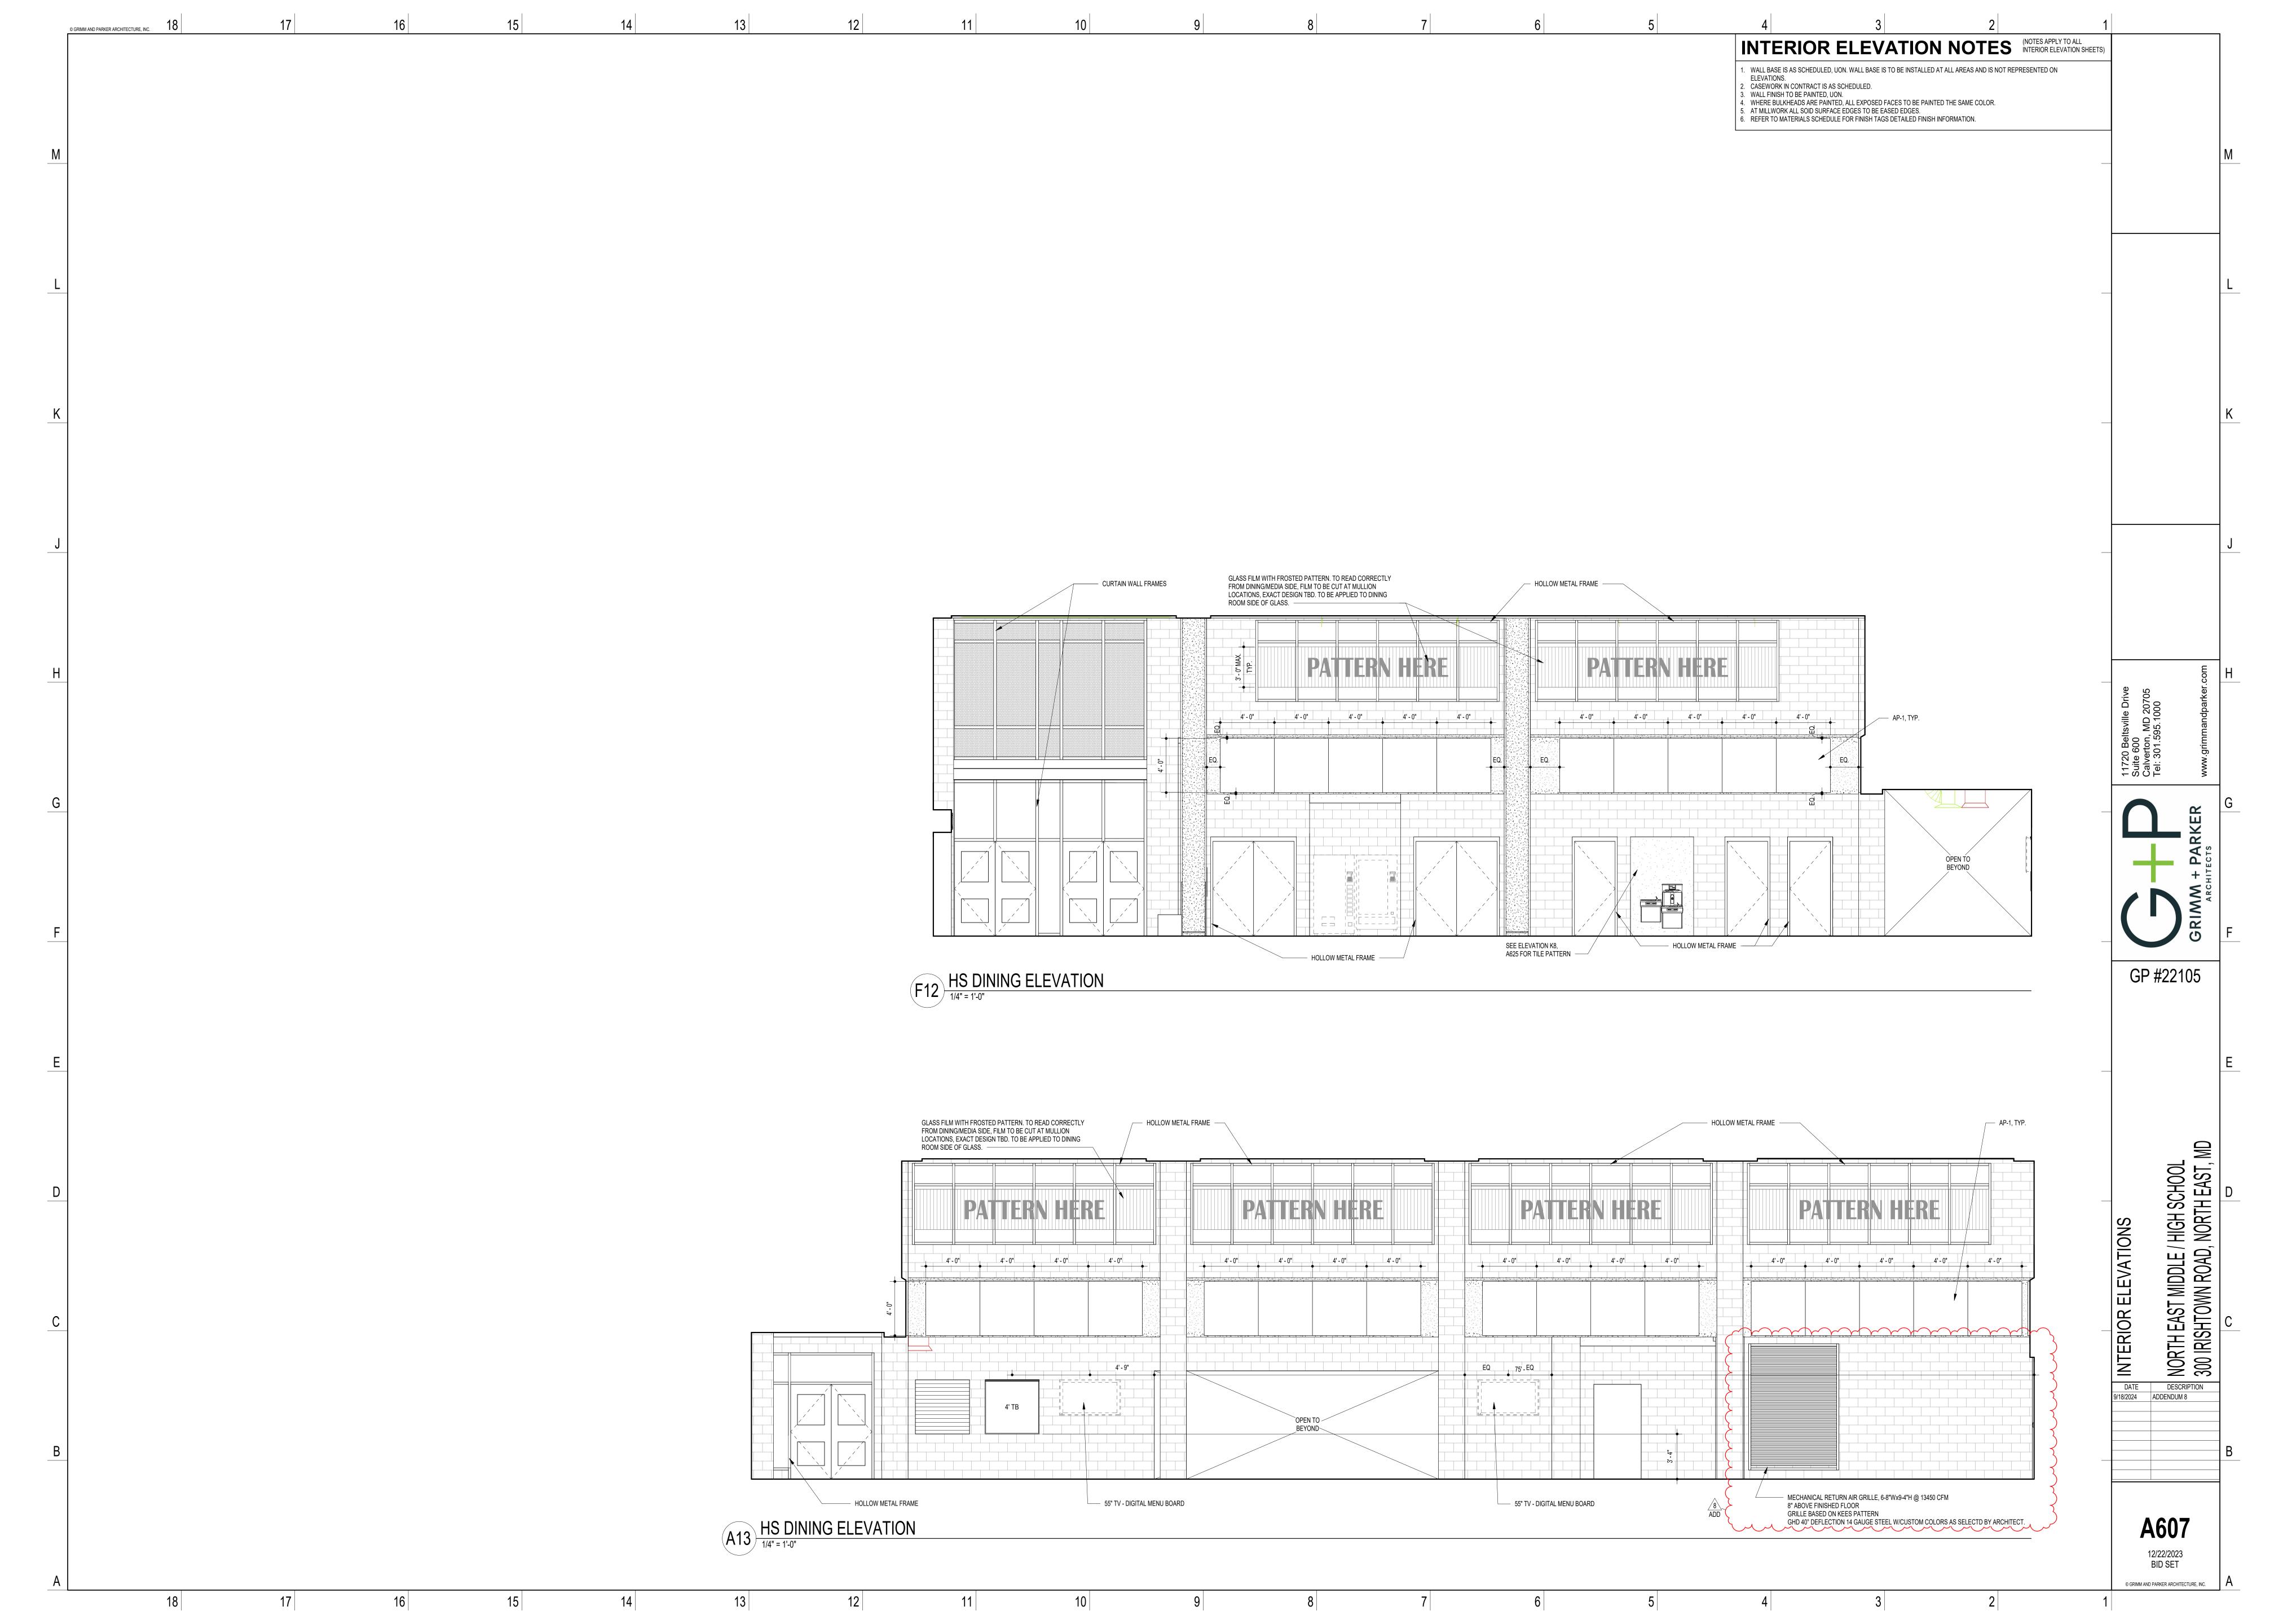



	© GRIMM AND PARKER ARCHITECTURE, INC.	17	16	15	14	13	12	11	10	9	8	7	5	4	3	1
		<u> </u>	I I	<u> </u>	<u> </u>	<u> </u>		- • •			1		<del>-</del>		FURNISHING AND EQUIPMENT NOTES	
								DESCRIPTION MANUF.  GLE-TIER LOCKER SEE SPEC.	MANUF. #         DEPTH         HEIG           SEE SPEC.         1' - 0"         3' - 0"	HT         WIDTH         REMARKS           1' - 0"         SEE DETAIL G7/A804		SIZE	RNISHING SCHEDULE - GENERAL  (INCHES)  D H MANUF. MANUF.	# REMARKS	NOTE: NOT ALL ITEMS INDICATED ON SCHEDULE ARE REPRESENTED IN THIS PROJECT.	
							LK3 DOUB	BLE-TIER LOCKER SEE SPEC.  BLE-TIER LOCKER SEE SPEC.	SEE SPEC. 1' - 0" 6' - 0"  SEE SPEC. 1' - 0" 6' - 0"	1' - 0" SEE DETAIL A14/A804 & A16/A804 1' - 3" SEE DETAIL A16/A804		G02 BASE OPEN SHELVING 36 G03 BASE OPEN SHELVING 42	14     25     STEVENS     10101       24     34     STEVENS     10101       24     34     STEVENS     10101		ALL CABINET HEIGHTS INCLUDE COUNTERTOPS. DIMENSIONS ARE     TO THE NEAREST INCH.     DIVISIONS IN CASEWORK ARE SHOWN FOR CLARITY AND DO NOT	
М							LOCK	ER ATHLETIC KER  PRO LOCKER  Wenger Corporation	SEE SPEC.       1' - 0"       5' - 0"         SEE SPEC.       1' - 2 7/8"       5' - 10"	1' - 0" SEE DETAIL A16/A804  2' - 0" DOUBLE-TIER NO SEAT, 24"W, GRILLE DOOR,		G07 BASE CABINET - 2 DOOR 24 G11 BASE CABINET - 2 DOOR 36	24       34       STEVENS       10120         24       34       STEVENS       10129         24       24       STEVENS       10129		REPRESENT BREAKS IN THE COUNTERTOP.  3. PROVIDE CONTINUOUS COUNTERTOP OVER ALL SIMILAR HEIGHT CASEWORK, UNLESS OTHERWISE NOTED.  4. MANUFACTURER AND CATALOG NUMBERS ARE FOR REFERENCE	M
								PRO LOCKER W/ Wenger	SEE SPEC.	SHOULDER PAD TOPPER DOUBLE-TIER WITH		G13 BASE CABINET - 2 DOOR 39 G14 BASE CABINET - 2 DOOR 42	24     34     STEVENS     10129       24     34     STEVENS     10129       24     34     STEVENS     10129       24     34     STEVENS     10129		AND ILLUSTRATION PURPOSES ONLY. SEE SPECIFICATION FOR FULL CASEWORK REQUIREMENTS.  5. PROVIDE RESILIENT BASE FOR ALL CASEWORK THAT MEETS THE	
							LK7 DOUB	BLE-TIER LOCKER SEE SPEC.	SEE SPEC. 1' - 3" 6' - 0"	SEAT, 24"W, GRILLE DOOR, SHOULDER PAD TOPPER 1' - 0" SEE DETAIL A16/A804		G16 BASE CABINET - 3 DRAWER 15 G17 BASE CABINET - 3 DRAWER 36	24     34     STEVENS     10129       24     34     STEVENS     10332       24     34     STEVENS     10332       24     30     STEVENS     10392		FLOOR ON FRONT AND EXPOSED SIDES AND BACK.  6. DOTTED LINES INDICATE WALL HUNG CABINETS, DIVISIONS OF BASE CABINETS BELOW THE COUNTERTOP, FURNITURE NOT IN THE CONTRACT OR PROJECTION SCREENS -SEE CASEWORK KEY AND	
							LK8 3-TIEF	ER LOCKER SEE SPEC.	SEE SPEC. 1' - 0" 6' - 0"	1' - 0" SEE DETAIL A16/A804		G20         BASE CABINET - 6 DRAWERS         48           G21         SINK BASE - ADA         36	30 34 STEVENS 10404 24 34 STEVENS 10576	NARROW POSTER STORAGE	SPECIFICATIONS.  7. ALL CABINETS AND DRAWERS TO HAVE CAM LOCKS EXCEPT FOR SINK BASE CABINETS.  8. ALL EXPOSED SURFACES (EXPOSED TO VIEW FROM ANY	
L								FURNIS	SHING SCHEDULE - MEDIA CENTER			G23 WALL OPEN SHELVING 24 G24 WALL OPEN SHELVING 36	24     34     STEVENS     10475       14     30     STEVENS     15101       14     18     STEVENS     15101		PERSPECTIVE) TO BE COVERED WITH LAMINATE.  9. WHERE CASEWORK MEETS A WALL AT ONE OR BOTH ENDS AND JOINT BETWEEN CASEWORK AND WALL EXCEEDS 3/16", PROVIDE FILLER PANEL(S) SCRIBED TO WALL. PROVIDE SEALANT AT JOINTS	
	-						ITEM L1 MOBII	<b>DESCRIPTION</b> BILE BOOKSHELF, DOUBLE - STAF	SIZE (INCHES)	. MANUF.# REMARKS L363624FB ON CASTERS		G26 WALL OPEN SHELVING 42 G27 WALL OPEN SHELVING 48	14     30     STEVENS     15101       14     30     STEVENS     15101       14     30     STEVENS     15101       14     30     STEVENS     15120		3/16" OR LESS INCLUDING BETWEEN FILLER PANEL AND WALL.  10. ALL CABINETS AND DRAWERS IN THE KINDERGARTEN ROOMS TO BE PROVIDED WITH RECESSED HANDLES.  11. ALL COUNTERTOP CORNERS TO BE 1/2" RADIUSED UNLESS	
								KSHELF, SINGLE - STARTER  GAZINE/PAMPHLET RACK	36 12 66 MONTEL AETNASTAI 36 12 66 MONTEL	LPF66		G30 WALL CABINET - 2 DOOR 24 G31 WALL CABINET - 2 DOOR 27	14     30     STEVENS     15129       14     30     STEVENS     15129       14     12     STEVENS     15129       14     12     STEVENS     15129		OTHERWISE NOTED.  12. PROVIDE ADEQUATE BLOCKING IN STUD WALLS AND AT CMU WALLS FOR WALL-MOUNTED EQUIPMENT AND FURNISHINGS.  13. CONTRACTOR TO FIELD VERIFY ALL CLEAR OPENINGS PRIOR TO	
								KSHELF, SINGLE - STARTER	36 12 36 MONTEL AETNASTAI	L363612FB		G36         WALL CABINET - 2 DOOR         36           G37         WALL CABINET - 2 DOOR         36	14     30     STEVENS     15129       14     18     STEVENS     15129       14     30     STEVENS     15129		MILLWORK OR CASEWORK FABRICATION.  14. MILLWORK AND CASEWORK DRAWINGS ARE DIAGRAMMATIC IN NATURE TO SHOW DESIGN INTENT. ALL WORK TO BE DONE IN ACCORDANCE WITH SPECIFICATIONS. CONSTRUCTION DETAILS ARE	
K								FUDAN	IOUINO COUEDUI E METAL OUELVINO			G39 WALL CABINET - 2 DOOR 39 G40 WALL CABINET - 2 DOOR 42	14     18     STEVENS     15129       14     30     STEVENS     15129       14     30     STEVENS     15129       14     30     STEVENS     15129		TO BE SUBMITTED IN SHOP DRAWINGS AND ARE SUBJECT TO THE APPROVAL OF THE ARCHITECT.	K
							ITEM		SIZE (INCHES)  W D H MANUF.	MANUF.# REMARKS		G42 TALL OPEN STORAGE 24 G43 TALL OPEN STORAGE 36	14     30     STEVENS     15129       24     85     STEVENS     25101       14     84     STEVENS     25101       24     85     STEVENS     25101			
							B OPEN C OPEN	N METAL SHELVING N METAL SHELVING	36         12         87         PER SPEC           36         18         87         PER SPEC           36         24         87         PER SPEC	PER SPEC PER SPEC PER SPEC		G45 TALL OPEN STORAGE 42 G46 TALL OPEN STORAGE 48	24 85 STEVENS 25101 24 84 STEVENS 25101 24 84 STEVENS 25129			
							E OPEN	N METAL SHELVING N METAL SHELVING N METAL SHELVING	48 18 87 PER SPEC 48 24 87 PER SPEC 48 30 87 PER SPEC	PER SPEC PER SPEC PER SPEC		G49         TALL CABINET - 2 DOOR         36           G50         TALL CABINET - 2 DOOR         48           G51         TEACHER WARDROBE         24	24     84     STEVENS     25129       24     84     STEVENS     25129       24     84     STEVENS     25672			
ı									FURNISHING SCHEDULE - MUSIC			G53 TALL METAL SHOP CABINET 24 G55 TALL METAL SHOP CABINET 36	24     84     STEVENS     25688       24     84     STEVENS     25108       24     84     STEVENS     25108       22     35     DIVERSIFIED     103-3622M			
							ITEM	DESCRIPTION	SIZE (INCHES) W D H MANU			G57 TOOL STORAGE CABINET 48	WOODCRAFTS INC.  24 84 DIVERSIFIED TETC-40 WOODCRAFTS INC.	W/ 1/4" PEGBOARD, OUTLETS		
							M3 STAN M4 STAN	NDARD CABINET #2 NDARD CABINET #3 NDARD CABINET #4	28 29 86 WENGER 86 WENGER 28 29 86 WENGER			G59 VERTICAL STORAGE 33	24     34     STEVENS     10683       30     34     STEVENS     10515       30     34     STEVENS     10517	W/ MOBILE CLAY CART #10685		
							M10 STAN M11 STAN	NDARD CABINET #5 NDARD CABINET #10 NDARD CABINET #11 NDARD CABINET #12	28 39 86 WENGER 28 29 86 WENGER 28 39 86 WENGER 48 29 86 WENGER	11		G61         MAILBOX         48           G62         MAILBOX         48	30     34     STEVENS     10517       14     30     STEVENS     15255       24     34     STEVENS     10239       12     64     SEE SPEC.     SEE SPEC.	32 COMPARTMENTS SEE DETAIL A3/A804		
							M13 STAN M15 STAN M70 STAN	NDARD CABINET #13 NDARD CABINET #15 NDARD CABINET #70	14 29 86 WENGER 48 29 86 WENGER 28 19 86 WENGER	13 15 70 ADJUSTABLE SHELF		1'-0"D  G65 DISPLAY CASE - 4'-0"W x 5'-4"H x 48 1'-4"D	16 64 SEE SPEC. SEE SPEC.	SEE DETAIL A3/A804		F 1.1
<u>H</u>	-						M71 STAN M72 STAN M73 STAN	NDARD CABINET #71 NDARD CABINET #72 NDARD CABINET #73	28 29 86 WENGER 28 29 86 WENGER 28 39 86 WENGER	71 ADJUSTABLE SHELF 72 ADJUSTABLE SHELF 73 ADJUSTABLE SHELF		1'-0"D	3 64 SEE SPEC. SEE SPEC.  12 64 SEE SPEC. SEE SPEC.	SEE DETAIL A3/A804		Orive 0705 0 arker.cor
							M75 STAN	NDARD CABINET #74 NDARD CABINET #75 ET MUSIC STORAGE RAL FOLIO CABINET MOBILE	28 29 86 WENGER 28 39 86 WENGER 16 44 92 WENGER 52 18 51 WENGER	75 ADJUSTABLE SHELF 173G700		1'-4"D	16         64         SEE SPEC.         SEE SPEC.           16         64         SEE SPEC.         SEE SPEC.	SEE DETAIL A3/A804 SEE DETAIL A3/A804		Itsville D , MD 20 595.1000
								RUMENTAL FOLIO CABINET MOB		146M032 1" SHELF SPACING W/ VERTICAL AND HORIZONTAL		G70 COMBINATION STORAGE - BASE 36 CABINET W/ DRAWERS G71 DEMONSTRATION ISLAND 98	24         34         STEVENS         10748           30         36         STEVENS         35144	W/ SINK KIT 35601		Suite 600 Calverton, Tel: 301.5
_										CLOSURES AS NEEDED		G73 WALL CABINET - 1 DOOR 12 G74 BASE CABINET - 3 DRAWER 12	30 30 STEVENS 35161 14 30 STEVENS 15120 24 34 STEVENS 10332			\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
<u>_G</u>	-											G76         BASE CABINET - 1 DOOR         18           G77         WALL CABINET - 1 DOOR         18           G78         BASE CABINET         36	24       84       STEVENS       10101         24       34       STEVENS       10120         14       30       STEVENS       15120         18       30       STEVENS       10129			A A B G
									SIZE (INCHES)			G79 BASE CABINET 30 G80 FILE DRAWER 15 G83 LUMBER/ PLYWOOD STORAGE 4	18       30       STEVENS       10129         18       30       STEVENS       10316         3       84       DIVERSIFIED       LR-1WM	SINGLE UPRIGHT, 5		PARK
							BACK	DESCRIPTION  COUNTER TOP W/ 4"  KSPLASH	DHMANUF.2530SEE SPECSEE	MANUF. # REMARKS  SPEC SEE DETAIL A11/A804		RACK	WOODCRAFTS, INC.  14 30 STEVENS 22165	PIPE ARMS. INSTALL PER MANUFACTURER. 2 MAGAZINE		RCHITE
							C3 42"H (	KSPLASH COUNTER TOP W/ 2" KSPLASH	25 42 SEE SPEC SEE	SPEC SEE DETAIL A11/A804  SPEC SEE DETAIL A11/A804		G85 BASE OPEN SHELVING 48 G86 SIGNUM TABLE - BASIC ELEMENT	14 25 STEVENS 10101 40 34 BCI LIBRARIES B 4021 10G XX	SHELVES		GR GR A
<u>_</u> F							C4 42"H ( C5 42"H ( C6 42"H (	COUNTER TOP COUNTER TOP COUNTER TOP	25         42         SEE SPEC         SEE           25         42         SEE SPEC         SEE           25         42         SEE SPEC         SEE           25         42         SEE SPEC         SEE	SPEC SEE DETAIL D7/A804 SPEC SEE DETAIL J14/A804	3 ADD	G87 SIGNUM TABLE - ADD ON ELEMENT G88 WORKBENCH WITH WOOD 48 CABINETS	40 34 BCI LIBRARIES B 4021 10A XX  31 DIVERSIFIED WOODCRAFTS, INC.	ON CASTERS		<del>5</del> F
							C7 BUTC	CHER BLOCK COUNTER TOP  STAINLESS STEEL COUNTER	25 36 DIVERSIFIED 2478 WOODCRAFTS INC.			G89 WORKBENCH WITH METAL 28 CABINETS	33 DIVERSIFIED WBB4-0V WOODCRAFTS, INC. 54 31 DIVERSIFIED WW4-4V	ON CASTERS		GP #22105
							C9 36"H 0 BACK C10 30"H 0	COUNTER TOP W/ 4" KSPLASH COUNTER TOP W/ 2"		SPEC SEE DETAIL A11/A804  SPEC SEE DETAIL A11/A804	3	G92 BASE OPEN SHELVING 33 G93 PERSPECTIVE DAMP CABINET 36	WOODCRAFTS INC.			
							BACK	KSPLASH			AUU	G94 PERSPECTIVE DRYING CABINET 36	18 84 DIVERSIFIED 9200BL WOODCRAFTS, INC.			
<u>E</u>							ITEM DOUB	DESCRIPTION	MANUF. MANUF. # Performance Sports 4090-B	REMARKS				7		-
								1BING WALL E	Systems  EVERLAST CLIMBING INDUSTRIES, INC.	WITH MATS AND MAT LOCKING SYSTEM			RNISHING SCHEDULE - SCIENCE  SIZE (INCHES)  N D H MANUF. MANUF.	JF.# REMARKS		
								BACKSTOP F BACKSTOP F	Performance Sports 3103 Systems Performance Sports 3103	W/ #AFRG42 GLASS BACKBOARD W/ #934 WOOD BACKBOARD		S4 BASE CABINET - 2 DOOR 3	N         D         H         MANUF.         MANUF.           30         24         34         CAMPBELL RHEA         3681C           30         30         34         CAMPBELL RHEA         3681C           36         24         34         CAMPBELL RHEA         3681D	N. TEINIAKNS		SHED!
							P5 MAIN P6 SIDE S	N SCOREBOARD [ SCOREBOARD [	Systems Daktronics, Inc. BB-2107 Daktronics, Inc. BB-2142			S7 BASE CABINET - 2 DOOR 30 S10 BASE CABINET - 4 DRAWERS 20 S11 BASE CABINET - 4 DRAWERS 20	36     30     34     CAMPBELL RHEA     3681D       24     24     34     CAMPBELL RHEA     3636       24     30     34     CAMPBELL RHEA     3636			T SI ST,
<u>D</u>	_						P8 BATTI	TING CAGE F	Performance Sports   109 Systems   4080-70 Systems	W/ #4087 NET			24 14 24 CAMPBELL RHEA 4689 30 14 24 CAMPBELL RHEA 4693 36 14 16 CAMPBELL RHEA 4671			
							P10 ADA E	BENCH 42"W x 20"D \$	Performance Sports 4020 & 1108 Systems SEE SPEC SEE SPEC	W/ CARRON HEAVY DUTY ARCHERY NET 51404	Г —		36     14     24     CAMPBELL RHEA     4695       48     14     24     CAMPBELL RHEA     4699       40     24     84     CAMPBELL RHEA     5686       40     24     84     CAMPBELL RHEA     5668	SHELVING W/ LIP		AUIPN/HIGH(
							P12 GYM I P13 BENC	I DIVIDER CURTAIN CH 48"W x 12"D S	SEE SPEC         SEE SPEC           Draper,Inc         SEE SPEC           SEE SPEC         SEE SPEC           SEE SPEC         SEE SPEC	SEE DETAIL H12/A426		S19 TALL CABINET - 2 DOOR 3 S21 TOTE TRAY STORAGE 2 S22 FLAMMABLE STORAGE CABINET 4	24     84     CAMPBELL RHEA     5000       36     24     84     CAMPBELL RHEA     5688       27     24     84     CAMPBELL RHEA     6350       43     18     65     CAMPBELL RHEA     6778	SHELVING W/ LIP		ND EC IDDLE / ROAD,
							VOLLI	2	1			S23 ACID STORAGE CABINET 4: S24 SINK BASE - ADA 3: S26 SINK BASE - CLOSED 3:	13     18     65     CAMPBELL RHEA     6781C       36     24     34     CAMPBELL RHEA     8760       36     30     34     CAMPBELL RHEA     2358			ST M
С							ITEM   E1   REFR	DESCRIPTION RIGERATOR - ADA COMPLIANT (	EQUIPMENT SCHEDULE  MANUF. MANUF. #  GE APPLIANCES GTE22JSNRSS	REMARKS LOCKABLE IN NURSE'S OFFICES A154 &			22     84     CAMPBELL RHEA     6774A       CAMPBELL RHEA     6667B       24     12     30     CAMPBELL RHEA     6784       36     24     84     CAMPBELL RHEA     6961			E 전동C
							E2 STUD E3 DISHV	DENT RANGE (	GE APPLIANCES JB480SMSS GE APPLIANCES GDT226SSLSS	A158		S30       TEACHER WARDROBE       30         S34       BASE CABINET - 2 DOOR       20         S35       BASE CABINET - 2 DOOR       30         S36       SINK BASE - CLOSED       30	36     24     84     CAMPBELL RHEA     6961       24     30     36     CAMPBELL RHEA     1500       30     30     36     CAMPBELL RHEA     1504       36     30     36     CAMPBELL RHEA     2358			FURN 300 IRI
						<u>/</u> A	ADD E5 ATHLE	LETIC WASHER  LETIC DRYER  ROWAVE	UNIMAC UWT085V4 \( \sqrt{5} \) UNIMAC UT075EVN AD	ELECTRICALLY POWERED  ELECTRICALLY POWERED  N.I.C.		S37 BASE CABINET - 4 DRAWERS 2: S38 TEACHER WARDROBE 2: S39 WALL CABINET - 2 DOOR 2:	24     30     36     CAMPBELL RHEA     1268       24     24     84     CAMPBELL RHEA     5850       27     14     24     CAMPBELL RHEA     4693			DATE DESCRIPTION 03/13/2024 ADDENDUM 1 03/25/2024 ADDENDUM 3
							E8 ICE M E9 STAC		SCOTSMAN UC2024MA-1  GEARPHANCES GUD27EESNWW	ENERGY STAR OR EQUIVALENT ADD		S41 INSTRUCTOR DESK 9	18     24     84     CAMPBELL RHEA     5692       16     30     36     CAMPBELL RHEA     6016       18     30     30     CAMPBELL RHEA     6020 & 6021	SHELVING W/ LIP  SEE PLANS FOR ORIENTATION		03/29/2024 ADDENDUM 5 9/18/2024 ADDENDUM 8
В						<u>/3</u>	E11 VEND	DING MACHINE TRUCTOR'S COOKTOP	APPLIANCES  SUMMIT CR4B30T11B	N.I.C.		S43         BASE CABINET - 4 DRAWERS         2           S55         BASE CABINET         2           S56         BASE CABINET - 4 DRAWERS         2	21 24 34 CAMPBELL RHEA 3635 24 24 34 CAMPBELL RHEA 3681E 21 30 36 CAMPBELL RHEA 1266	ORIENTATION		В
						AUL	E13 STUD EXHA	DENT ISLAND RANGE AUST HOOD	APPLIANCES GE APPLIANCES JVW5301SJSS GE APPLIANCES PV977NSS			S57 PLAIN FRAME W/ 2 LEGS 24	24 67 34 CAMPBELL RHEA 6980	PROVIDE CUSTOM FRAME SIZE PER SCHEDULE	ADD	
							HOOD E15 MOBIL E16 HOYE	BILE CHANGER SER LIFT	SMIRTHWAITE MOBI 3123 C-UL	N.I.C.		S58 PLAIN FRAME W/ 2 LEGS 4:	8 67 34 CAMPBELL RHEA 6980	PROVIDE CUSTOM FRAME SIZE PER SCHEDULE		A800
						4	E17 FUME E18 KILN		ICIscientific F-100-48G5 L&L KILNS e23T	W/ FURNITURE KIT H-E-K23T/00, VENT-SURE DOWNDRAFT VENT WITH M-V-CNTL/00 VENT CONTROL.						12/22/2023 BID SET
_A	10	17	16	15	11	13	12	11	10	٥	Ω	7		<u></u>	3	© GRIMM AND PARKER ARCHITECTURE, INC.
	10	17	10	10	ן די	10	14	11	IU	3	<b>U</b>	0	J	ן ד	۷	1

