

# LYLES CROUCH LEAD IN DRINKING WATER SAMPLING JUNE 2024



LYLES CROUCH TRADITIONAL ACADEMY

530 S ASAPH STREET  
ALEXANDRIA, VIRGINIA 22314

ECS PROJECT NO. 47:11652-E

FOR: ALEXANDRIA CITY PUBLIC SCHOOLS (ACPS)

OCTOBER 7, 2024





October 7, 2024

Mr. John Contreras  
Alexandria City Public Schools (ACPS)  
1340 Braddock Place  
Alexandria, Virginia 22314  
john.contreras@acps.k12.va.us

ECS Project No. 47:11652-E

Reference: Lyles Crouch Lead in Drinking Water Sampling June 2024, Lyles Crouch Traditional Academy, 530 S Asaph Street, Alexandria, Virginia

Dear Mr. Contreras:

ECS Mid-Atlantic, LLC (ECS) is pleased to provide Alexandria City Public Schools (ACPS) with the results of the lead in drinking water sampling performed at Lyles Crouch Traditional Academy located at 530 S Asaph Street in Alexandria, Virginia. This report summarizes our observations, analytical results, findings, and recommendations related to the work performed. The work described in this report was performed by ECS in general accordance with the Scope of Services described in ECS Proposal Number 47:16189-EP and the terms and conditions of the agreement authorizing those services.

ECS appreciates this opportunity to provide Alexandria City Public Schools (ACPS) with our services. If we can be of further assistance to you, please do not hesitate to contact us.

Sincerely,

ECS Mid-Atlantic, LLC

Lauren E. Kesslak, CIH, CSP  
Senior Project Manager  
LKesslak@ecslimited.com  
703-471-8400

Christopher J. Chapman, CIH  
Director of Industrial Hygiene  
cchapman@ecslimited.com  
703-471-8400

<b>TABLE OF CONTENTS</b>		<b>PAGE</b>
<b>1.0</b>	<b>PROJECT DESCRIPTION</b> .....	<b>1</b>
<b>2.0</b>	<b>PURPOSE</b> .....	<b>1</b>
<b>3.0</b>	<b>METHODOLOGY</b> .....	<b>1</b>
3.1	Lead and Copper in Drinking Water .....	1
<b>4.0</b>	<b>RESULTS</b> .....	<b>2</b>
4.1	Lead in Drinking Water .....	2
4.2	Copper in Drinking Water .....	2
<b>5.0</b>	<b>RECOMMENDATIONS AND REGULATORY REQUIREMENTS</b> .....	<b>2</b>
5.1	Lead in Drinking Water .....	3
5.2	Copper in Drinking Water .....	4
<b>6.0</b>	<b>LIMITATIONS</b> .....	<b>5</b>

## **TABLE OF APPENDICES**

Appendix I: Drawings

Appendix II: Sample Table

Appendix III: Laboratory Report(s)

## 1.0 PROJECT DESCRIPTION

The Lyles Crouch Traditional Academy is a two-story school building located at 530 S Asaph Street in Alexandria, Virginia. The building is currently occupied, and is used by Alexandria City Public Schools as a school. The site is located within the City of Alexandria and is under the jurisdiction of Environmental Protection Agency (EPA) and Commonwealth of Virginia Code of Regulations for drinking water in schools.

The site receives water from Virginia American Water, which is classified as a public drinking water system by the EPA under the Safe Drinking Water Act (SDWA). Because the site is connected to a public water system, the site is not independently regulated as a water supplier by the EPA.

## 2.0 PURPOSE

The purpose of this water sampling event was to perform periodic re-testing of select drinking water sources within the school. This was not a comprehensive retesting of all drinking water sources in the school.

The EPA created the Lead and Copper Rule under the EPA Safe Drinking Water Act (SDWA). US EPA established a lead action level of 15 ppb (parts per billion) or 15 micrograms per liter ( $\mu\text{g/L}$ ) and an action level of 1300  $\mu\text{g/L}$  for copper.

The Code of Virginia § 22.1-135.1 currently requires Virginia school boards to develop and implement a plan to test, and if necessary, remediate potable water sources identified by the US EPA as a high priority. Each local school board shall submit testing plans and laboratory results to the Department of Health. If potable water sources are detected at or above 10 parts per billion (10  $\mu\text{g/L}$ ), the school board shall notify parents of such results.

The US EPA's *3Ts for Reducing Lead in Drinking Water in Schools: Revised Technical Guidance (EPA 815-B-18-007)* was created to provide recommendations on how to address lead in drinking water in schools and child care facilities. The procedures and response actions outlined in the EPA's 3Ts document are recommendations not requirements. The EPA's 3Ts guidance document does not set action levels for lead in drinking water but it does reference the action levels created for public water systems in the EPA's lead and copper rule (LCR). The results of this water sampling event were compared to the action levels set in the EPA's LCR.

## 3.0 METHODOLOGY

ECS performed the authorized Scope of Services in general accordance with our proposal, standard industry practice(s) and methods specified by regulation(s) for sampling drinking water.

### 3.1 Lead and Copper in Drinking Water

Sample protocols were performed following the guidance of the US EPA document, *3Ts for Reducing Lead in Drinking Water in Schools: Revised Technical Guidance (EPA 815-B-18-007)*. For each facility, water samples were collected from priority drinking water sources that were previously sampled and shown to have elevated levels of lead within the water.

ECS coordinated the water sampling with ACPS officials, and it is ECS's understanding that all of the water sources sampled were not in use at least eight hours prior to sampling and were flushed by APS at the time they were taken out of service. For this sampling event, ECS attempted to sample 20% of the accessible potable water sources within the building, with a minimum of five samples per building and a minimum of two samples per floor. During sampling, initial draw samples were collected. The samples were collected in 250 mL bottles with a nitric acid preservative. These water bottles were provided to ECS by Maryland Spectral Services, Inc. The water samples were provided with unique identification labels which include the school initials, a sequential number identifier, and sample location identifier.

The collected samples were sealed and transported by courier to Maryland Spectral Services located in Baltimore, Maryland under chain of custody protocol for analysis per EPA Methodology for lead in drinking water.

Please note that efforts were made to collect samples from selected outlets in accordance with the methodology described above.

#### **4.0 RESULTS**

The following is a summary of laboratory results, findings and observations.

##### **4.1 Lead in Drinking Water**

All of the samples collected were below both the Commonwealth of Virginia action level with the exception of three (3) samples. The samples collected from the sink in classroom 209, the drinking fountain in classroom 211 and the sink in the library exceeded the Virginia action level of 10 µg/L. In total, fourteen (14) water samples were collected from the building. A table of the collected samples and the associated analytical results can be found in the appendices. Please note that the analytical results displayed in the table have been converted to µg/L (PPB) for easy reference. A copy of the laboratory analytical results and chain of custody are attached to this report. A sketch identifying the approximate location of each water sample can also be found in the appendices.

##### **4.2 Copper in Drinking Water**

None of the water samples collected were reported to have concentrations above the EPA and VA action level of 1300 µg/L. In total, fourteen (14) water samples were collected from the building. A table of the collected samples and the associated analytical results can be found in the appendices. Please note that the analytical results displayed in the table have been converted to µg/L (PPB) for easy reference. A copy of the laboratory analytical results and chain of custody are attached to this report. A sketch identifying the approximate location of each water sample can also be found in the appendices.

#### **5.0 RECOMMENDATIONS AND REGULATORY REQUIREMENTS**

Based on our understanding of the purpose of the Lyles Crouch Lead in Drinking Water Sampling June 2024, the results of laboratory analysis, and our findings and observations, ECS presents the following recommendations.



## 5.1 Lead in Drinking Water

The water samples collected from the sinks in Classrooms 209 and the library and the drinking fountain in Room 211 were reported to be above the lead action level for Virginia. The other water samples collected were reported below the Commonwealth of Virginia's action level. The EPA's 3Ts document recommends choosing one of several short-term or permanent control measures. The following are the recommended short-term and permanent control measure options:

### Short-Term Control Options:

- Mark the sinks as hand wash only. The water fountain should be taken out of service.
- Provide Filters at Problem Taps - Point-of-use (POU) units are commercial available, can be relatively inexpensive, and quickly installed. The effectiveness of POU's can vary. POU's should be tested and certified against the NSF/ANSI Standard 53 (for lead removal) prior to installation. If POU's are installed, they should be incorporated into a routine maintenance plan;
- Flush Taps Prior to Use - Flushing individual outlets or all outlets may be used as a short term option; and,
- Provide Bottled Water - This control option is expensive and ECS does not recommend its use because of the relatively small number of elevated outlets.

### Permanent Control Measures:

- Replacement of Problem Outlets - This option is recommended as a cost effective permanent control measure if there are only a few elevated outlets;
- Pipe Replacement;
- Provide Filters at Problem Taps: and,
- Reconfigure Plumbing.

After the implementation of a control option, ECS recommends follow-up sampling of the elevated outlets to evaluate effectiveness of the control option.

In addition to the remediation efforts for the elevated outlets, ECS recommends period follow-up screening be performed for the building. The EPA does not specify a specific time frame for which follow-up testing for schools needs to be performed. The EPA suggest that schools and child care facilities make testing a part of their routine building operations and states that annual monitoring provides information on changing concentrations and the effectiveness of remediation or treatment options.

Because of the elevated water sample detected from the fountain in room 211, more targeted water sampling should be considered focusing on water fountains and food preparation areas, and also sinks that could be used for drinking (break rooms) in the near future.

No specific time frame is given in which follow-up testing for the schools needs to be performed. As good practice, ECS recommends performing follow-up periodic testing every three years. If additional guidelines or regulations are enacted at a state or federal level, the frequency of testing should be modified to reflect these changes.

In the US EPA 3Ts document, routine control measures are recommended as general good practice for over-all drinking water safety. The routine control measures that should be conducted to prevent exposure to elevated levels of lead, include the following:

- Clean debris from all accessible screens frequently. If you discovered sediments in faucet screens, have the sediments tested for lead and continue to clean your screens frequently, even if the analysis finds no lead.
- Use only cold water for food and beverage preparation. Hot water will dissolve lead more quickly than cold water and is likely to contain increased lead levels. If hot water is needed, it should be taken from the cold water tap and heated on a stove or in a microwave oven.
- Instruct the users (students and staff) to run the water before drinking or staff could run the water before students arrive, so they are drinking water that has not been in contact with the faucet interior since faucets are often a major source of lead in drinking water.
- Placard bathroom sinks with notices that water should not be consumed. You should use pictures if there are small children using bathrooms.
- US EPA recommends public notification of the findings of this sample event to the public and school staff. EPA has described different procedures for dissemination of this information which are described in Section III.6 of the 3 Ts document. The school should review the different methods described and choose the most appropriate method for the school.

## 5.2 Copper in Drinking Water

The sample results were below the action level, and no further testing or remediation is indicated at this time.

No specific time frame is given in which follow-up testing for the schools needs to be performed. As good practice, ECS recommends performing follow-up periodic testing every three years. If additional guidelines or regulations are enacted at a state or federal level, the frequency of testing should be modified to reflect these changes.

In the US EPA 3Ts document, routine control measures are recommended as general good practice for over-all drinking water safety. The routine control measures that should be conducted to prevent exposure to elevated levels of lead, include the following:

- Clean debris from all accessible screens frequently. If you discovered sediments in faucet screens, have the sediments tested for lead and continue to clean your screens frequently, even if the analysis finds no lead.
- Use only cold water for food and beverage preparation. Hot water will dissolve lead more quickly than cold water and is likely to contain increased lead levels. If hot water is needed, it should be taken from the cold water tap and heated on a stove or in a microwave oven.
- Instruct the users (students and staff) to run the water before drinking or staff could run the water before students arrive, so they are drinking water that has not been in contact with the faucet interior since faucets are often a major source of lead in drinking water.
- Placard bathroom sinks with notices that water should not be consumed. You should use pictures if there are small children using bathrooms.



- US EPA recommends public notification of the findings of this sample event to the public and school staff. EPA has described different procedures for dissemination of this information which are described in Section III.6 of the 3 Ts document. The school should review the different methods described and choose the most appropriate method for the school.

## 6.0 LIMITATIONS

The conclusions and recommendations presented within this report are based upon a reasonable level of assessment within normal bounds and standards of professional practice for a site in this particular geographic setting. ECS is not responsible or liable for the discovery and elimination of hazards that may potentially cause damage, accidents, or injuries.

The observations, conclusions, and recommendations pertaining to environmental conditions at the subject site are necessarily limited to conditions observed, and/or materials reviewed at the time this study was undertaken. No warranty, expressed or implied, is made with regard to the conclusions and recommendations presented within this report. This report is provided for the exclusive use of the client. This report is not intended to be used or relied upon in connection with other projects or by other unidentified third parties without the written consent of ECS and the client.

Our recommendations are in part based on federal, state, and local regulations and guidelines. ECS does not assume the responsibility of the person(s) in charge of the site, or otherwise undertake responsibility for reporting to any local, state, or federal public agencies, any conditions at the site that may present a potential danger to public health, safety, or the environment. Under this scope of services, ECS assumes no responsibility regarding any response actions initiated as a result of these findings. General compliance with regulations and response actions are the sole responsibility of the Client and should be conducted in accordance with local, state, and/or federal requirements.

# **Appendix I: Drawings**




Sample Locations

Sample: 03

Sample: 02

Sample: 01

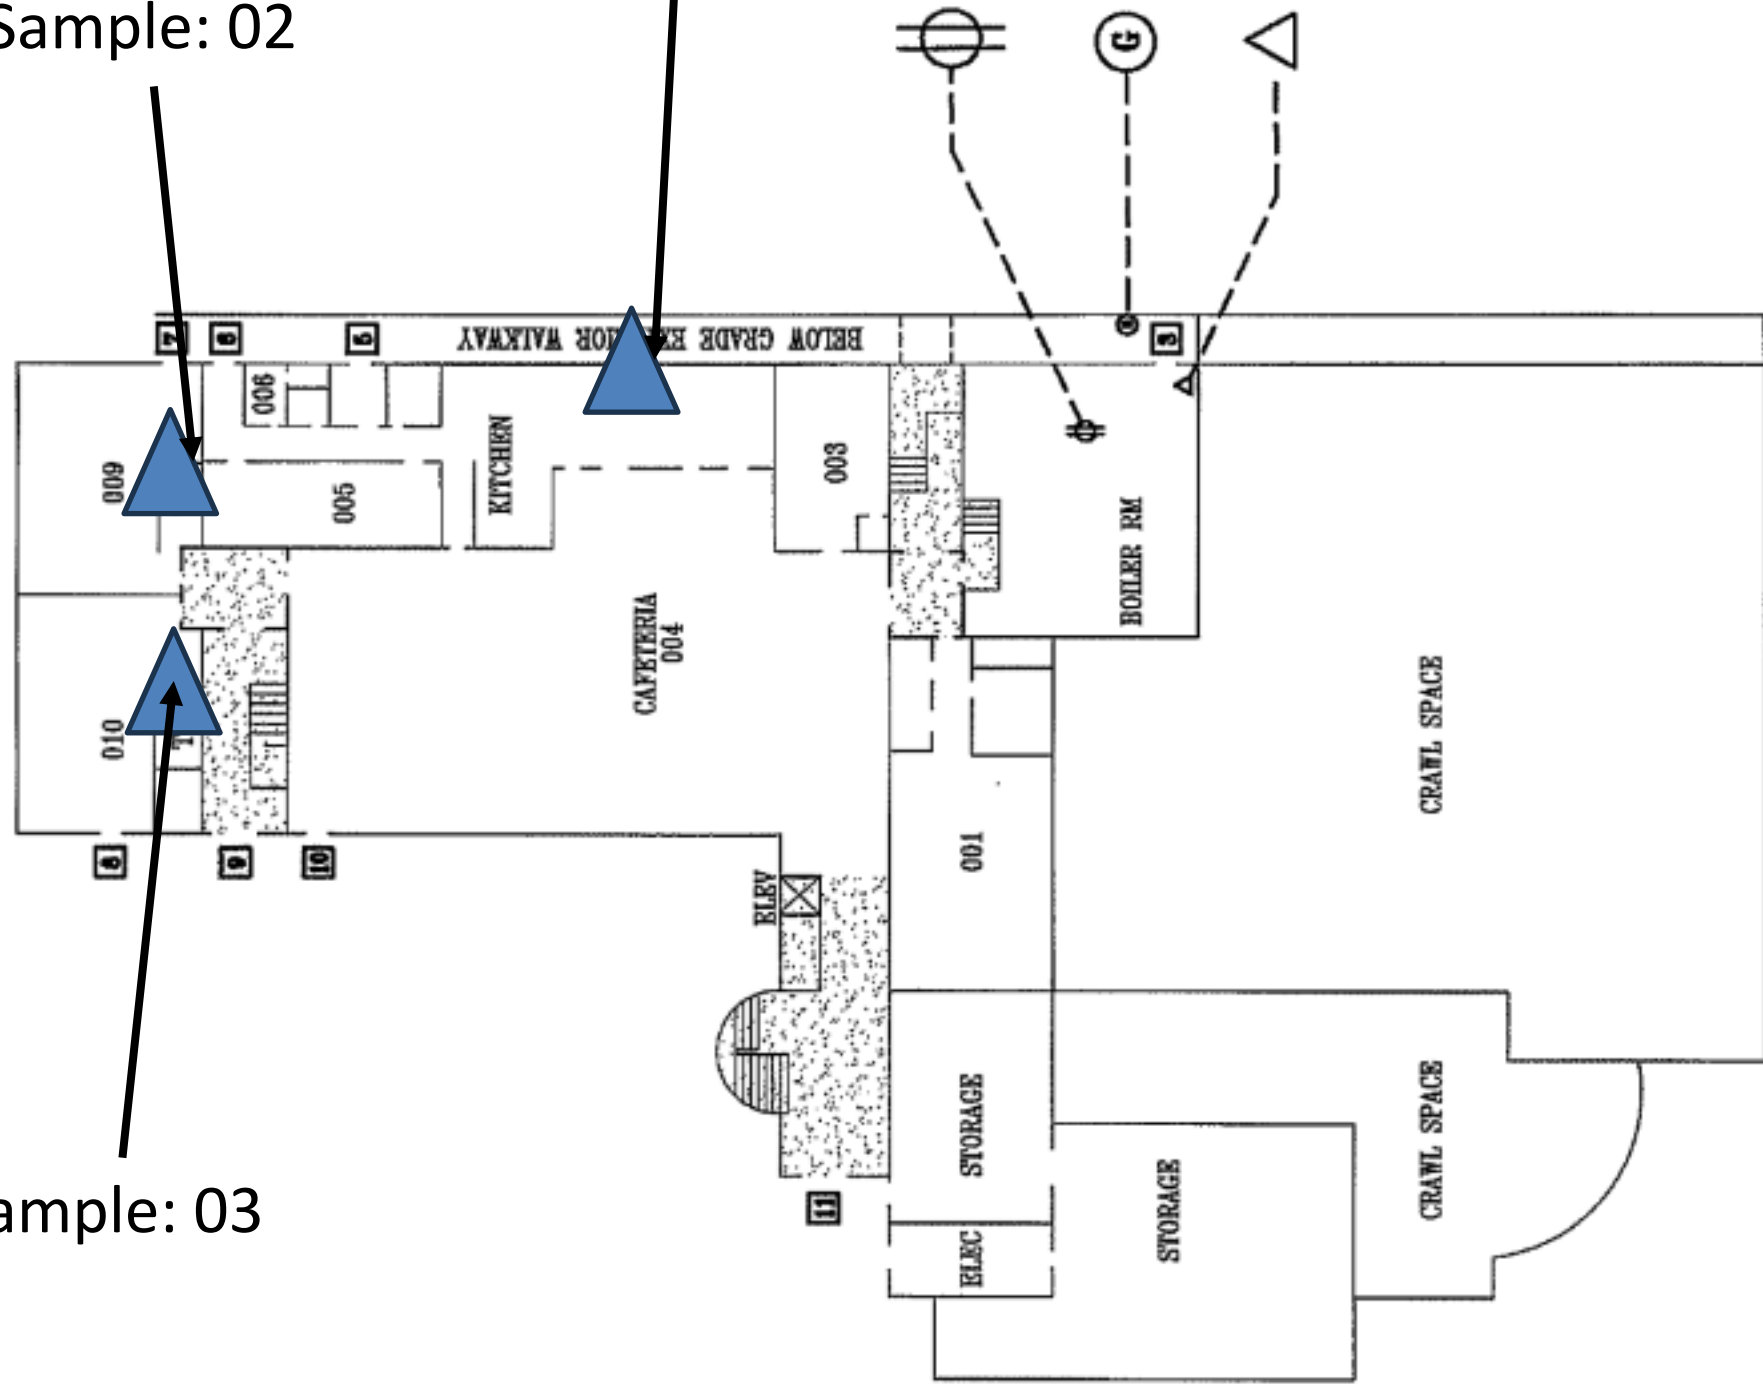

Superseded

FIRE ANNUNCIATOR PANEL  $\Phi$  ELECTRIC SHUT OFF  $\Delta$  WATER SHUT OFF  $\odot$  GAS SHUT OFF  
**LYLES-CROUCH ELEMENTARY SCHOOL**  
 0 S. Saint Asaph Street  
 Alexandria, Va 22314  
 703-706-4490 (F) 703-684-0252

---

**Alexandria City Public Schools**  
 2000 North Beauregard Street  
 Alexandria, Va 22311  
 (T) 703-824-6600  
 (TDD) 703-824-6666  
 (EMER.) 703-866-5300

[GROUND FLOOR PLAN]



### Water Sample Location Sketch - Ground Floor

Scale: NTS


Project No. 47:11652-E

Site Visit: 6/24/24

Lyles-Crouch Traditional Academy  
 530 S St Asaph St,  
 Alexandria, VA 22314




Sample Locations

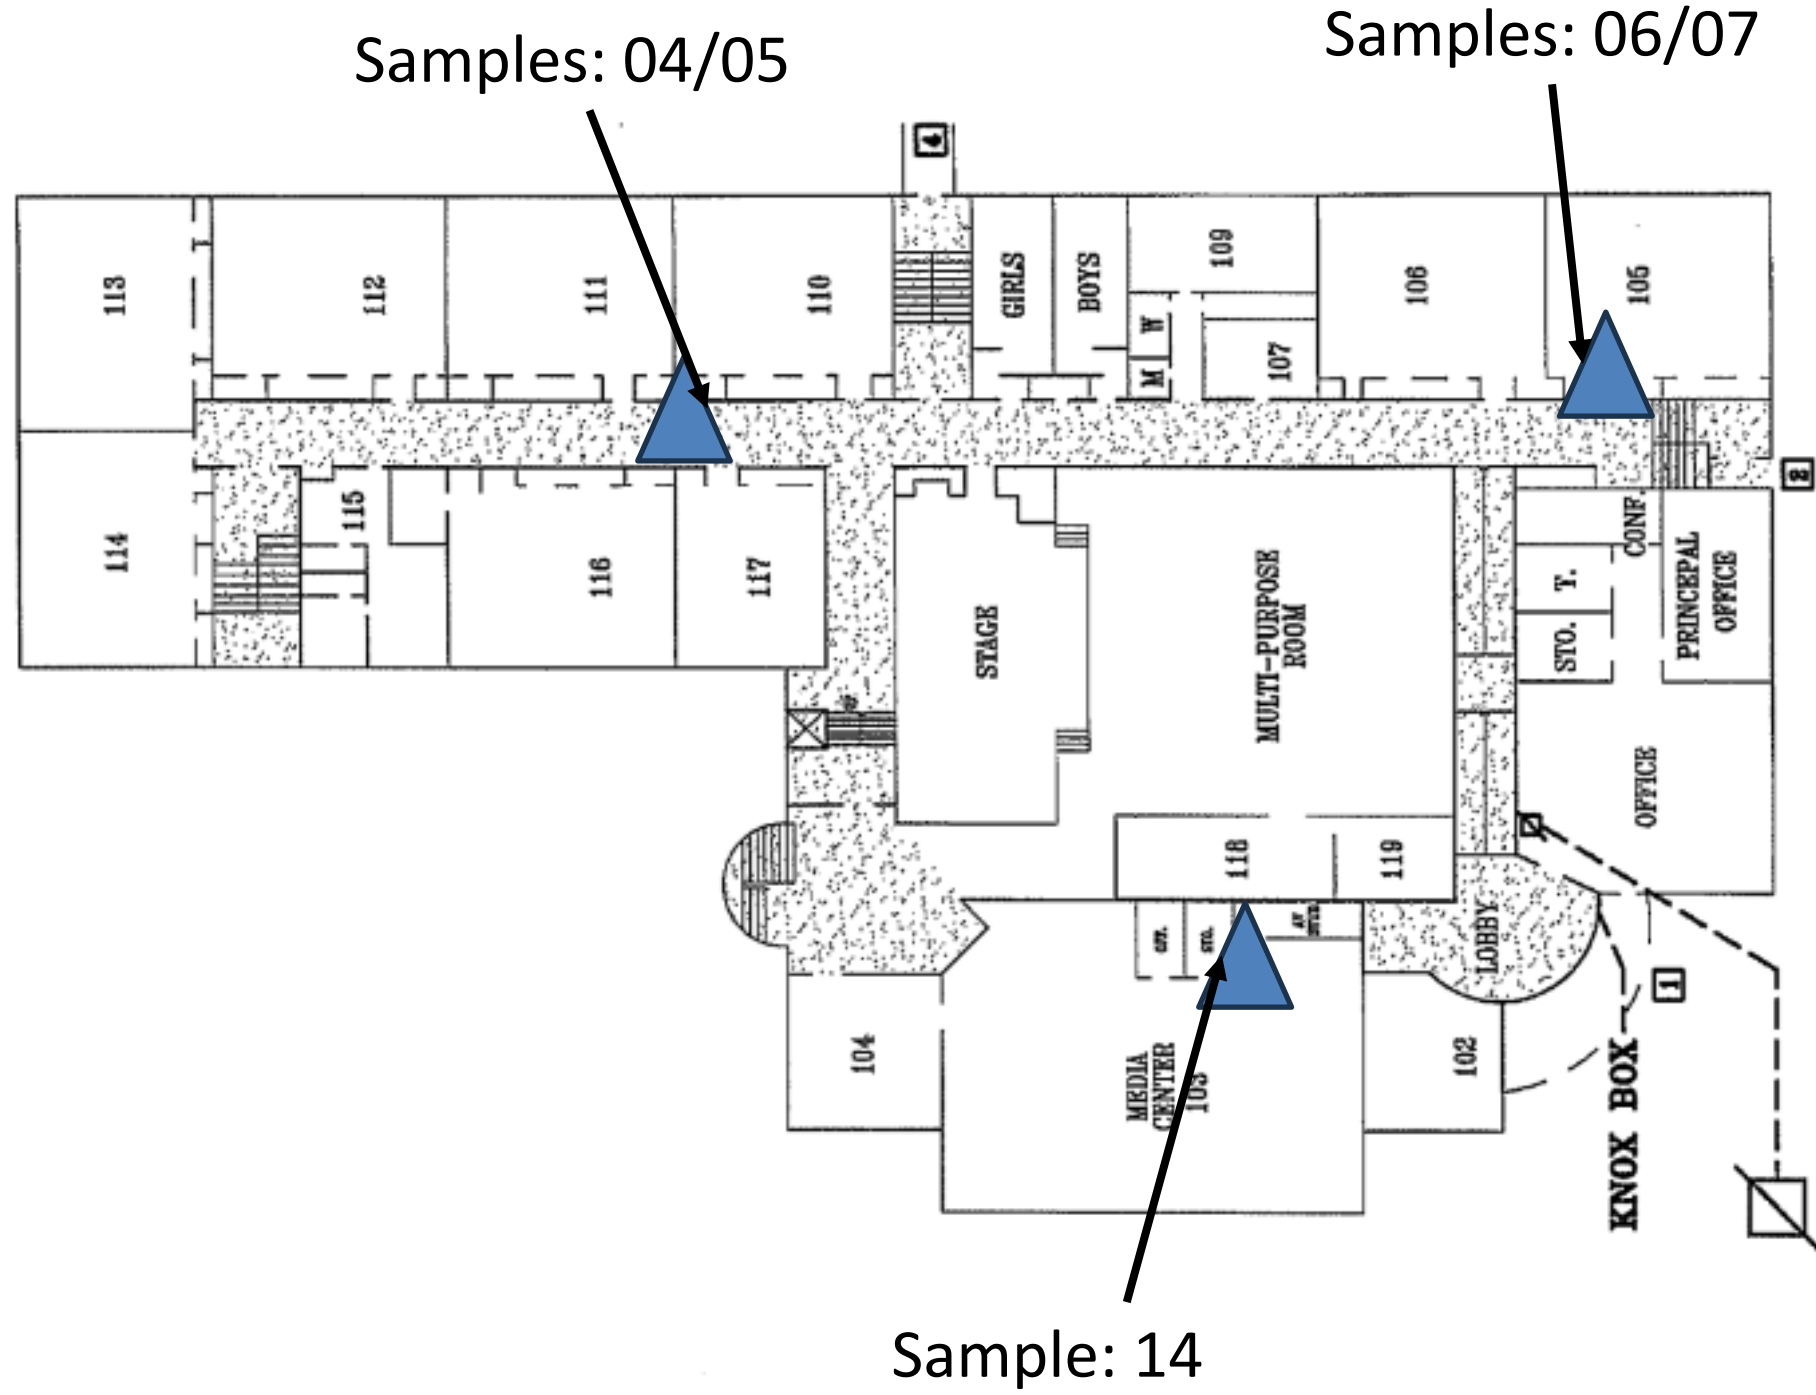

Superseded

T FIRE ANNUNCIATOR PANEL    ⚡ ELECTRIC SHUT OFF    ⚠ WATER SHUT OFF    Ⓞ GAS SHUT OFF  
**LYLES-CROUCH ELEMENTARY SCHOOL**  
 530 S. Saint Asaph Street  
 Alexandria, Va 22314  
 (T) 703-706-4430 (F) 703-684-0252


 1ST FLOOR PLAN

**Alexandria City Public Schools**  
 2000 North Beauregard Street  
 Alexandria, Va 22311  
 (T) 703-824-6600  
 (TDD) 703-824-6666  
 (HEAR.) 703-866-5300



### Water Sample Location Sketch-1st Floor

Scale: NTS

Project No. 47:11652-E

Site Visit: 6/24/24

Lyles-Crouch Traditional Academy  
 530 S St Asaph St,  
 Alexandria, VA 22314




Sample Locations

Samples: 11/12

Samples: 09/10

Sample: 08

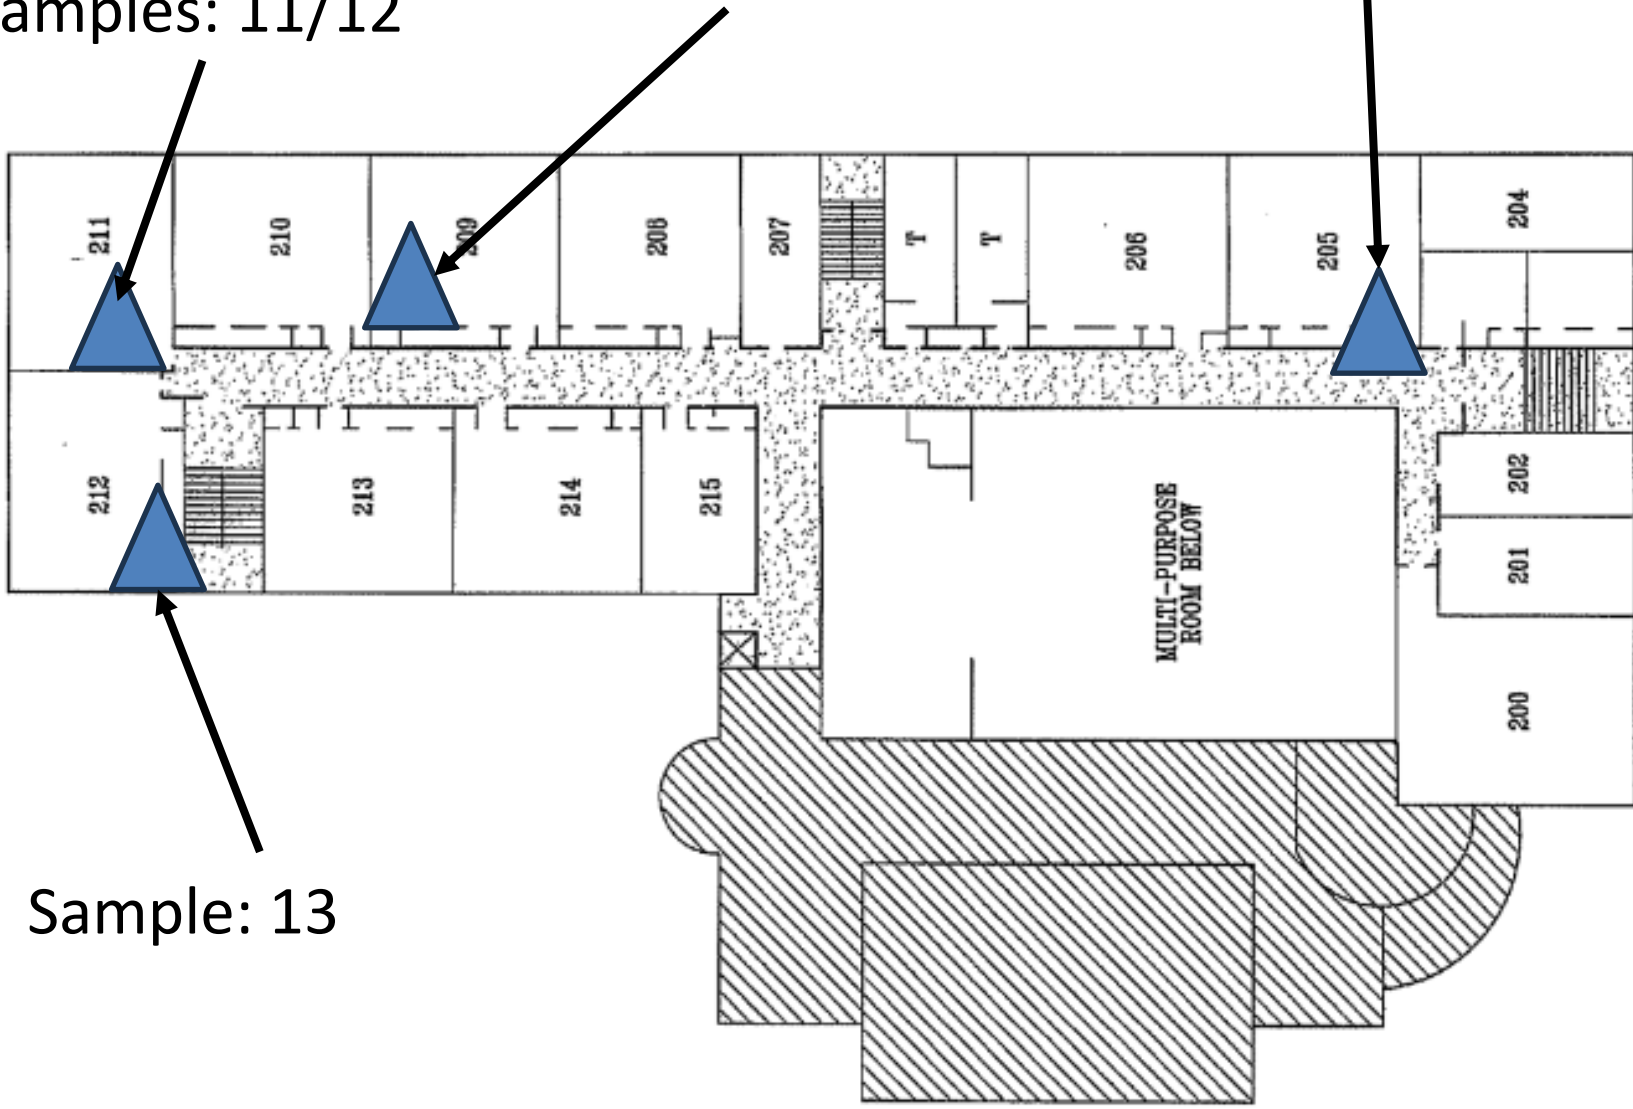

Superseded

**LYLES-CROUCH ELEMENTARY SCHOOL**

530 S. Saint Asaph Street  
Alexandria, Va 22314

(T) 703-706-4430 (F) 703-684-0252



2nd FLOOR PLAN

**Alexandria City Public Schools**

2000 North Beauregard Street  
Alexandria, Va 22311

(T) 703-824-6600  
(TDD) 703-824-6666  
(EMER.) 703-866-5300

### Water Sample Location Sketch- 2nd Floor

Scale: NTS

Project No.  
47:11652-E

Site Visit:  
6/24/24



Lyles-Crouch Traditional Academy  
530 S St Asaph St,  
Alexandria, VA 22314

## **Appendix II: Sample Table**



Copper and Lead Drinking Water Results Table		
Sample Number	Copper Result (µg/L)	Lead Result (µg/L)
4081520-01	273	1.10
4081520-02	102	2.09
4081520-03	197	ND
4081520-04	478	ND
4081520-05	426	ND
4081520-06	132	1.03
4081520-07	69.5	1.28
4081520-08	265	ND
4081520-09	428	ND
4081520-10	291	19.0
4081520-11	147	79.4
4081520-12	174	2.45
4081520-13	244	ND
4081520-14	468	18.3

The EPA's Lead and Copper Rule set an action level of 15 µg/L for lead and an action level of 1300 µg/L for copper. Note these levels are related to public water systems (PWSs). The Code of Virginia requires school boards notify parents if testing results exceed 10 µg/L of Lead (Pb).

Table Notes:

Red = Above the EPA Action Level

Orange = Exceeds VA Action Level for Lead

ND= None Detected

# **Appendix III: Laboratory Report(s)**



26 August 2024

Lauren Kesslak  
ECS-Chantilly  
14026 Thunderbolt Place, Suite 100  
Chantilly, VA 20151  
RE: ACPS- Lyles Crouch

Enclosed are the results of analyses for samples received by the laboratory on 08/15/24 14:30.

Please visit our website at [www.mdspectral.com](http://www.mdspectral.com) for a complete listing of our accreditations.

If you have any questions concerning this report, please feel free to contact me.

Sincerely,



Samantha Adrian  
Staff Chemist

1500 Caton Center Dr Suite G  
Baltimore MD 21227  
410-247-7600  
www.mdspectral.com  
MD DW LabID 153

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
Project Manager: Lauren Kesslak

Reported:  
08/26/24 14:11

Client Sample ID	Alternate Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
1		4081520-01	Drinking Water	06/24/24 06:01	08/15/24 14:30
2		4081520-02	Drinking Water	06/24/24 06:04	08/15/24 14:30
3		4081520-03	Drinking Water	06/24/24 06:05	08/15/24 14:30
4		4081520-04	Drinking Water	06/24/24 06:07	08/15/24 14:30
5		4081520-05	Drinking Water	06/24/24 06:08	08/15/24 14:30
6		4081520-06	Drinking Water	06/24/24 06:11	08/15/24 14:30
7		4081520-07	Drinking Water	06/24/24 06:12	08/15/24 14:30
8		4081520-08	Drinking Water	06/24/24 06:14	08/15/24 14:30
9		4081520-09	Drinking Water	06/24/24 06:16	08/15/24 14:30
10		4081520-10	Drinking Water	06/24/24 06:17	08/15/24 14:30
11		4081520-11	Drinking Water	06/24/24 06:20	08/15/24 14:30
12		4081520-12	Drinking Water	06/24/24 06:21	08/15/24 14:30
13		4081520-13	Drinking Water	06/24/24 06:25	08/15/24 14:30
14		4081520-14	Drinking Water	06/24/24 06:27	08/15/24 14:30



Samantha Adrian, Staff Chemist

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

1500 Caton Center Dr Suite G  
 Baltimore MD 21227  
 410-247-7600  
 www.mdspectral.com  
 MD DW LabID 153

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
 Project Manager: Lauren Kesslak

**Reported:**  
 08/26/24 14:11

1

**4081520-01 (Drinking Water)**  
**Sampled on: 06/24/24 06:01**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Total Metals Analysis by EPA 200.8DW Prepared by 200.8-No Digestion Metals</b>									
Copper	273		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:28	AWH
Lead	1.10		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:28	AWH



*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

Samantha Adrian, Staff Chemist

1500 Caton Center Dr Suite G  
 Baltimore MD 21227  
 410-247-7600  
 www.mdspectral.com  
 MD DW LabID 153

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
 Project Manager: Lauren Kesslak

Reported:  
 08/26/24 14:11

2

**4081520-02 (Drinking Water)**  
**Sampled on: 06/24/24 06:04**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Total Metals Analysis by EPA 200.8DW Prepared by 200.8-No Digestion Metals</b>									
Copper	102		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:30	AWH
Lead	2.09		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:30	AWH



*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

Samantha Adrian, Staff Chemist

1500 Caton Center Dr Suite G  
 Baltimore MD 21227  
 410-247-7600  
 www.mdspectral.com  
 MD DW LabID 153

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
 Project Manager: Lauren Kesslak

Reported:  
 08/26/24 14:11

3

**4081520-03 (Drinking Water)**  
**Sampled on: 06/24/24 06:05**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Total Metals Analysis by EPA 200.8DW Prepared by 200.8-No Digestion Metals</b>									
Copper	197		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:32	AWH
Lead	ND		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:32	AWH



*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

Samantha Adrian, Staff Chemist

1500 Caton Center Dr Suite G  
 Baltimore MD 21227  
 410-247-7600  
 www.mdspectral.com  
 MD DW LabID 153

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
 Project Manager: Lauren Kesslak

Reported:  
 08/26/24 14:11

4

**4081520-04 (Drinking Water)**  
**Sampled on: 06/24/24 06:07**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Total Metals Analysis by EPA 200.8DW Prepared by 200.8-No Digestion Metals</b>									
Copper	478		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:37	AWH
Lead	ND		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:37	AWH



Samantha Adrian, Staff Chemist

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

1500 Caton Center Dr Suite G  
 Baltimore MD 21227  
 410-247-7600  
 www.mdspectral.com  
 MD DW LabID 153

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
 Project Manager: Lauren Kesslak

Reported:  
 08/26/24 14:11

5

**4081520-05 (Drinking Water)**  
**Sampled on: 06/24/24 06:08**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Total Metals Analysis by EPA 200.8DW Prepared by 200.8-No Digestion Metals</b>									
Copper	426		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:38	AWH
Lead	ND		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:38	AWH



*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

Samantha Adrian, Staff Chemist

1500 Caton Center Dr Suite G  
 Baltimore MD 21227  
 410-247-7600  
 www.mdspectral.com  
 MD DW LabID 153

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
 Project Manager: Lauren Kesslak

Reported:  
 08/26/24 14:11

6

**4081520-06 (Drinking Water)**  
**Sampled on: 06/24/24 06:11**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Total Metals Analysis by EPA 200.8DW Prepared by 200.8-No Digestion Metals</b>									
Copper	132		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:40	AWH
Lead	1.03		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:40	AWH



*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

Samantha Adrian, Staff Chemist



1500 Caton Center Dr Suite G  
 Baltimore MD 21227  
 410-247-7600  
 www.mdspectral.com  
 MD DW LabID 153

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
 Project Manager: Lauren Kesslak

Reported:  
 08/26/24 14:11

7

**4081520-07 (Drinking Water)**  
**Sampled on: 06/24/24 06:12**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Total Metals Analysis by EPA 200.8DW Prepared by 200.8-No Digestion Metals</b>									
Copper	69.5		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:42	AWH
Lead	1.28		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:42	AWH



*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

Samantha Adrian, Staff Chemist

1500 Caton Center Dr Suite G  
 Baltimore MD 21227  
 410-247-7600  
 www.mdspectral.com  
 MD DW LabID 153

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
 Project Manager: Lauren Kesslak

Reported:  
 08/26/24 14:11

8

**4081520-08 (Drinking Water)**  
**Sampled on: 06/24/24 06:14**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Total Metals Analysis by EPA 200.8DW Prepared by 200.8-No Digestion Metals</b>									
Copper	265		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:43	AWH
Lead	ND		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:43	AWH



*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

Samantha Adrian, Staff Chemist

1500 Caton Center Dr Suite G  
 Baltimore MD 21227  
 410-247-7600  
 www.mdspectral.com  
 MD DW LabID 153

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
 Project Manager: Lauren Kesslak

Reported:  
 08/26/24 14:11

9

**4081520-09 (Drinking Water)**  
**Sampled on: 06/24/24 06:16**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Total Metals Analysis by EPA 200.8DW Prepared by 200.8-No Digestion Metals</b>									
Copper	428		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:45	AWH
Lead	24.0		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:45	AWH



*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

Samantha Adrian, Staff Chemist

1500 Caton Center Dr Suite G  
Baltimore MD 21227  
410-247-7600  
www.mdspectral.com  
MD DW LabID 153

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
Project Manager: Lauren Kesslak

Reported:  
08/26/24 14:11

10

**4081520-10 (Drinking Water)**  
**Sampled on: 06/24/24 06:17**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Total Metals Analysis by EPA 200.8DW Prepared by 200.2-Digested Metals</b>									
Copper	291		ug/L	1.00	1.00	1	08/22/24	08/23/24 14:22	AWH
Lead	19.0		ug/L	1.00	1.00	1	08/22/24	08/23/24 14:22	AWH



*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

Samantha Adrian, Staff Chemist

1500 Caton Center Dr Suite G  
 Baltimore MD 21227  
 410-247-7600  
 www.mdspectral.com  
 MD DW LabID 153

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
 Project Manager: Lauren Kesslak

Reported:  
 08/26/24 14:11

11

**4081520-11 (Drinking Water)**  
**Sampled on: 06/24/24 06:20**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Total Metals Analysis by EPA 200.8DW Prepared by 200.8-No Digestion Metals</b>									
Copper	147		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:47	AWH
Lead	79.4		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:47	AWH



*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

Samantha Adrian, Staff Chemist

1500 Caton Center Dr Suite G  
 Baltimore MD 21227  
 410-247-7600  
 www.mdspectral.com  
 MD DW LabID 153

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
 Project Manager: Lauren Kesslak

Reported:  
 08/26/24 14:11

12

**4081520-12 (Drinking Water)**  
**Sampled on: 06/24/24 06:21**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Total Metals Analysis by EPA 200.8DW Prepared by 200.8-No Digestion Metals</b>									
Copper	174		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:48	AWH
Lead	2.45		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:48	AWH



*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

Samantha Adrian, Staff Chemist

1500 Caton Center Dr Suite G  
 Baltimore MD 21227  
 410-247-7600  
 www.mdspectral.com  
 MD DW LabID 153

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
 Project Manager: Lauren Kesslak

Reported:  
 08/26/24 14:11

13

**4081520-13 (Drinking Water)**  
**Sampled on: 06/24/24 06:25**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Total Metals Analysis by EPA 200.8DW Prepared by 200.8-No Digestion Metals</b>									
Copper	244		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:50	AWH
Lead	ND		ug/L	1.00	1.00	1	08/19/24	08/19/24 21:50	AWH



*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

Samantha Adrian, Staff Chemist

1500 Caton Center Dr Suite G  
 Baltimore MD 21227  
 410-247-7600  
 www.mdspectral.com  
 MD DW LabID 153

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
 Project Manager: Lauren Kesslak

Reported:  
 08/26/24 14:11

14

**4081520-14 (Drinking Water)**  
**Sampled on: 06/24/24 06:27**

Analyte	Result	Notes	Units	Reporting Limit (MRL)	Detection Limit (LOD)	Dilution	Prepared	Analyzed	Analyst
<b>Total Metals Analysis by EPA 200.8DW Prepared by 200.2-Digested Metals</b>									
Copper	468		ug/L	1.00	1.00	1	08/22/24	08/23/24 14:25	AWH
Lead	18.3		ug/L	1.00	1.00	1	08/22/24	08/23/24 14:25	AWH



*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

Samantha Adrian, Staff Chemist



**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
Project Manager: Lauren Kesslak

Reported:  
08/26/24 14:11

**Total Metals Analysis by EPA 200.8DW - Quality Control**

Analyte	Result	Notes	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit
<b>Batch B408506 - 200.8-No Digestion Metals</b>										
<b>Blank (B408506-BLK1)</b>					Prepared & Analyzed: 08/19/24					
Copper	ND		1.00	ug/L						
Lead	ND		1.00	ug/L						
<b>Blank (B408506-BLK2)</b>					Prepared & Analyzed: 08/19/24					
Copper	ND		1.00	ug/L						
Lead	ND		1.00	ug/L						
<b>Blank (B408506-BLK3)</b>					Prepared & Analyzed: 08/19/24					
Copper	ND		1.00	ug/L						
Lead	ND		1.00	ug/L						
<b>Blank (B408506-BLK4)</b>					Prepared & Analyzed: 08/19/24					
Copper	ND		1.00	ug/L						
Lead	ND		1.00	ug/L						
<b>LCS (B408506-BS1)</b>					Prepared & Analyzed: 08/19/24					
Copper	11.1		1.00	ug/L	10.00		111	85-115		
Lead	11.2		1.00	ug/L	10.00		112	85-115		
<b>LCS (B408506-BS2)</b>					Prepared & Analyzed: 08/19/24					
Copper	11.4		1.00	ug/L	10.00		114	85-115		
Lead	11.6	S-98	1.00	ug/L	10.00		116	85-115		
<b>LCS (B408506-BS3)</b>					Prepared & Analyzed: 08/19/24					
Copper	11.1		1.00	ug/L	10.00		111	85-115		
Lead	11.5		1.00	ug/L	10.00		115	85-115		
<b>LCS (B408506-BS4)</b>					Prepared & Analyzed: 08/19/24					
Copper	11.0		1.00	ug/L	10.00		110	85-115		
Lead	11.3		1.00	ug/L	10.00		113	85-115		



The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

Samantha Adrian, Staff Chemist

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
Project Manager: Lauren Kesslak

Reported:  
08/26/24 14:11

**Total Metals Analysis by EPA 200.8DW - Quality Control**

Analyte	Result	Notes	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit
<b>Batch B408506 - 200.8-No Digestion Metals</b>										
<b>Duplicate (B408506-DUP1)</b>			<b>Source: 4081519-01</b>			Prepared & Analyzed: 08/19/24				
Copper	186		1.00	ug/L		185			0.6	20
Lead	1.84		1.00	ug/L		2.08			12	20
<b>Duplicate (B408506-DUP2)</b>			<b>Source: 4081519-11</b>			Prepared & Analyzed: 08/19/24				
Copper	269		1.00	ug/L		272			1	20
Lead	ND		1.00	ug/L		ND				20
<b>Duplicate (B408506-DUP3)</b>			<b>Source: 4081519-21</b>			Prepared & Analyzed: 08/19/24				
Copper	393		1.00	ug/L		399			2	20
Lead	1.60		1.00	ug/L		1.60			0.1	20
<b>Duplicate (B408506-DUP4)</b>			<b>Source: 4081520-01</b>			Prepared & Analyzed: 08/19/24				
Copper	273		1.00	ug/L		273			0.05	20
Lead	1.13		1.00	ug/L		1.10			3	20
<b>Matrix Spike (B408506-MS1)</b>			<b>Source: 4081519-01</b>			Prepared & Analyzed: 08/19/24				
Copper	198		1.00	ug/L	10.00	185	124	70-130		
Lead	12.6		1.00	ug/L	10.00	2.08	105	70-130		
<b>Matrix Spike (B408506-MS2)</b>			<b>Source: 4081519-11</b>			Prepared & Analyzed: 08/19/24				
Copper	282		1.00	ug/L	10.00	272	102	70-130		
Lead	11.2		1.00	ug/L	10.00	ND	112	70-130		
<b>Matrix Spike (B408506-MS3)</b>			<b>Source: 4081519-21</b>			Prepared & Analyzed: 08/19/24				
Copper	407		1.00	ug/L	10.00	399	84	70-130		
Lead	12.6		1.00	ug/L	10.00	1.60	110	70-130		
<b>Matrix Spike (B408506-MS4)</b>			<b>Source: 4081520-01</b>			Prepared & Analyzed: 08/19/24				
Copper	283		1.00	ug/L	10.00	273	104	70-130		
Lead	13.2		1.00	ug/L	10.00	1.10	121	70-130		



Samantha Adrian, Staff Chemist

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
Project Manager: Lauren Kesslak

Reported:  
08/26/24 14:11

**Total Metals Analysis by EPA 200.8DW - Quality Control**

Analyte	Result	Notes	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit
<b>Batch B408603 - 200.2-Digested Metals</b>										
<b>Blank (B408603-BLK1)</b>					Prepared: 08/22/24 Analyzed: 08/23/24					
Copper	ND		1.00	ug/L						
Lead	ND		1.00	ug/L						
<b>LCS (B408603-BS1)</b>					Prepared: 08/22/24 Analyzed: 08/23/24					
Copper	10.2		1.00	ug/L	10.00		102	85-115		
Lead	9.45		1.00	ug/L	10.00		94	85-115		
<b>Duplicate (B408603-DUP1)</b>			<b>Source: 4081904-01</b>			Prepared: 08/22/24 Analyzed: 08/23/24				
Copper	29.8		1.00	ug/L		31.3			5	20
Lead	5.83		1.00	ug/L		6.40			9	20
<b>Matrix Spike (B408603-MS1)</b>			<b>Source: 4081904-01</b>			Prepared: 08/22/24 Analyzed: 08/23/24				
Copper	39.0		1.00	ug/L	10.00	31.3	77	70-130		
Lead	16.2		1.00	ug/L	10.00	6.40	98	70-130		



Samantha Adrian, Staff Chemist

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

**Project: ACPS- Lyles Crouch**

Project Number: 47:11652-E  
Project Manager: Lauren Kesslak

Reported:  
08/26/24 14:11

**Notes and Definitions**

- S-98 Spike recovery outside of established control limits.
- RE Sample reanalyses are done at the laboratory's discretion as a mechanism to improve data quality. Any client requested reanalysis will be identified with a sample qualifier.
- ND Analyte NOT DETECTED at or above the reporting limit
- dry Sample results reported on a dry weight basis
- RPD Relative Percent Difference
- %-Solids Percent Solids is a supportive test and as such does not require accreditation



Samantha Adrian, Staff Chemist

*The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.*

Company Name: ECS Mid-Atlantic LLC.			Project Manager: Lauren Kessler				Analysis Requested										<b>CHAIN-OF-CUSTODY RECORD</b>				
Project Name: 47:1165-E ACPS Various Schools Testing 2023-2024- Lyles Crouch			Project ID: 47:1165-E Lyles Crouch														Maryland Spectral Services, Inc. 1500 Caton Center Drive, Suite G Baltimore, MD 21227 410-247-7600 * Fax 410-247-7602 reporting@mdspectral.com				
Sampler(s): Zach Harrell			P.O. Number: 47:1165-E														Matrix NPW - non-potable water Codes: DW - drinking water				
State of Origin: VA																					
Field Sample ID:	Date	Time	DW	NPW	Soil	Other	Grab	Composite	# of containers						eservati	Field Notes	MSS Lab ID				
1	6/24/2024	6:01														Kitchen Sink	4081520-01				
2	6/24/2024	6:04														009 Left Bathroom	-02				
3	6/24/2024	6:05														010 Bubbler	-03				
4	6/24/2024	6:07														1st Floor Hallway Bubbler- Outside 117	-04				
5	6/24/2024	6:08														1st Floor Hallway bottle Filler-Outside 117	-05				
6	6/24/2024	6:11														105 Bubbler	-06				
7	6/24/2024	6:12														105 Sink	-07				
8	6/24/2024	6:14														2nd Floor Hallway bottle Filler- Between 204-205	-08				
9	6/24/2024	6:16														209 Bubbler	-09				
10	6/24/2024	6:17														209 Sink	-10				
11	6/24/2024	6:20														211 Bubbler	-11				
12	6/24/2024	6:21														211 Sink	-12				
13	6/24/2024	6:25														212 Bubbler	-13				
14	6/24/2024	6:27														Library Sink	-14				
Relinquished by: (Signature)		Date /Time		Relinquished by: (Signature)				Please indicate if any of the following certifications are required:										<input type="checkbox"/> Virginia VELAP <input type="checkbox"/> MD Drinking Water <input type="checkbox"/> Pennsylvania NEI <input type="checkbox"/> VA Drinking Water <input type="checkbox"/> West Virginia DE <input type="checkbox"/> Other _____			
(Printed)				(Printed)				Turn Around Time:										Delivery Method		Lab Use:	
Relinquished by: (Signature)		Date /Time		Received by lab: (Signature)				<input checked="" type="checkbox"/> Normal (7 day) <input type="checkbox"/> 5 day <input type="checkbox"/> 4 day <input type="checkbox"/> 3 day <input type="checkbox"/> Rush (2 day) <input type="checkbox"/> Next Day <input type="checkbox"/> Other: _____ <input type="checkbox"/> Specific Due Date: _____										<input type="checkbox"/> Courier <input type="checkbox"/> Client <input type="checkbox"/> UPS <input type="checkbox"/> Fed Ex <input type="checkbox"/> USPS <input type="checkbox"/> Other _____		Temp: 23.0°C <input type="checkbox"/> Received on Ice <input type="checkbox"/> Received Same Day <input checked="" type="checkbox"/> T-41 <input type="checkbox"/> T-45	
(Printed)		8/15/24 14:30		(Printed) Rachel Horner																Sample Disposal:	
Special Instructions / QC Requirements & Comments:																		<input type="checkbox"/> Return to Client <input type="checkbox"/> Disposal by lab <input type="checkbox"/> Archive for _____			