Competitive Sealed Proposal

HVAC Upgrades Part 2

CSP #22.26

Release Date: 05/19/22
Advertising Dates: 05/21/2022 & 5/28/2022
Bidders Conference: 06/07/22 10:00am,
Amelia Elementary, 555 Major Dr. Beaumont, TX 77707

Due Date: 6/28/2022 1:00pm
Bid Opening: 06/28/2022 1:00pm, 3395 Harrison Ave, Beaumont TX 77706
Board Approval: 07/21/2022
Award Date: 07/22/2022
Contract Begins: 07/23/2022
Contract Period: Two Years

SUBMISSION OF PROPOSAL

I. Each Seller is expected to examine the specifications and all instructions. Failure to do so will be at the vendor's risk. However, BISD reserves the right to reject any or all proposals and to waive minor irregularities in proposal preparation.

II. Each vendor shall furnish the information required on the District Proposal forms. Deviations to the Standard Conditions and/or Specifications shall be conspicuously noted in writing by the Seller and shall be included with the proposal.

III. Erasures or other changes/corrections must be initialed by person submitting the proposal.

IV. Unit price and extended price for each item offered will be recorded in proper columns on the proposal form. If there is a discrepancy between the unit cost and the total price, the unit cost will stand as the offered price.

V. Proposals shall be enclosed in sealed envelopes addressed per instructions, with the name and address of the Seller and the title of the proposal on the envelope.

VI. In the event no proposal is to be submitted by the Seller, the request for sealed proposal should be returned so marked. Notation should be made advising whether further request for the type of supplies or services covered by this request are desired. Failure to do so may result in being deleted from the district vendor list.

VII. The Seller may respond to all or part of the proposal unless otherwise instructed.

VIII. Faxed or emailed proposals will not be accepted by the district.

CONTENTS:

- Section 1: CSP Overview
- Section 2: Supplier Instructions
- Section 3: CSP Requirements

SECTION 1: CSP OVERVIEW

1.1 CSP General Conditions:

The Beaumont Independent School District is requesting proposals to provide HVAC upgrades to 10 area campuses.

This CSP is not an offer to contract. Acceptance of a proposal neither commits our company to award a contract to any supplier, even if all requirements stated in this CSP are met, nor limits our right to negotiate in our best interest. We reserve the right to contract with a supplier for reasons other than lowest price. We will thoroughly examine each proposal for best price, product quality, performance measures, flexibility, and customer support.

Proposals are to be made in good faith, without fraud, collusion, or connection of any kind with any other contractor for the same work. All bidders must complete in their own interest and in their own behalf. If you are subcontracting any portion of this agreement, you must identify the subcontractor in your proposal and agree that all subcontractors are bound to all terms and conditions of this CSP.

The supplier will absorb all costs incurred in the preparation and presentation of the proposal.

All suppliers who submit proposals will be notified of the results of the selection process.

BISD reserves the right to reject any or all proposals, in whole or in part, with or without cause, even if all the stated requirements are met. In addition, BISD may enter negotiations with one or more entities simultaneously and award a contract without notification. At the sole discretion of BISD, bidder presentations may be requested before award of the contract. BISD may also request the opportunity to conduct an on-site review of the supplier's facility and/or other locations where these services are provided, or a demonstration of the proposed technology.

1.2 CSP Purpose and Scope:

The district is requesting proposals for the replacement of chillers and supportive HVAC equipment at 10 schools.

It is the intent of this CSP that the responder shall provide an end-to-end solution for implementation of the Scope of Work outlines in Exhibit B. The vendor will provide all design, planning, architecture, installation, training, and implementation support for the project. District staff will act in oversight and advisory capacity.

The successful respondent for this contract will be the sole authority and responsible party for this implementation. If the successful respondent utilizes subcontractors for any part of the system architecture, design, planning, installation, or support, it should understand that the successful respondent will be the sole District point of contact and responsible party for all activities.

SECTION 2: SUPPLIER INSTRUCTIONS:

2.1 CSP Timeline:

This schedule outlines the major activities that will occur in this bid process and the due dates. Any changes in deadlines will be communicated to all suppliers in writing. We reserve the right to disqualify any supplier who does not comply with these deadlines.

Events	Date
Request for Proposal Issued	05/19/2022
Bidders Conference	06/07/2022
CSP Submissions Due	06/28/2022
Open and Review CSP Submissions	06/28/2022
Bidder Tabulations	TBD
Board Approval	07/21/2022
Contract Awarded	07/22/2022
Contract Term	Two Years

2.2 Supplier Questions

Questions regarding the content of or schedule for the CSP must be submitted in writing by e-mail to bids@bmtisd.com according to the CSP schedule provided in Section 2.1. BISD will issue answers to all supplier questions, as noted in that schedule. In the event that modifications or additions to the CSP become necessary, suppliers will be notified via amendment posted to the BISD Purchasing website.

There will be a bidder's conference and walk-through on June 7,2022 at 10:00am located at 555 Major Drive, Beaumont TX 77707.

2.3 Proposal Format and Submission Requirements

Proposals should be organized in the following format:

- **Section 1: Executive Summary**. The one- or two-page executive summary is to briefly describe the Proposer's proposal. This summary should highlight the major features of the proposal. It must indicate any requirements that cannot be met by the Proposer. The reader should be able to determine the essence of the proposal by reading the executive summary.
- **Section 2: Supplier Information**. Proposers should provide in-line responses to all requirements outlined in CSP Exhibit B
- **Pricing**. Proposers should complete a full Pricing Proposal for each line item in Exhibit B
- **Additional Information**. Proposers may include additional information regarding their products and services.

Completed proposals should be submitted via schedule in Section 2.1.

SECTION 3: REQUIREMENTS

3.1 Supplier Information

- Legal name of the company
- Number of years in business
- Headquarters location address, phone number, website
- Company type
- Number of employees
- Tax ID number

3.2 Company Experience and References

Please describe the product/market differentiators that distinguish you in the industry and make you capable of competing for this project.

Please provide project details for at least three (3) School Districts of similar size and scope to that requested by BISD. Project details should include:

- Deployment date and period of performance
- Number of fixtures, including increases/decreases in project scope
- Number of supported locations, including increases/decreases in project scope
- Overview of project performance, including successes, challenges, etc.

Select one project as a contactable reference. Include contact information (name, title, phone, and email) for a customer reference who can speak to project performance throughout the life of the contract.

3.3 Implementation Project Management:

Vendor will provide a designated individual as Project Manager for implementation, who will serve as the district's primary contact with the vendor for the duration of the project. Project manager will be expected to attend weekly project status meeting with the district and will be assigned for the duration of the project. Project manager assignment will not be changed without the prior consent of the district. The district reserves the right to require a change in project management based on performance.

Vendor shall serve as the project manager, working with BISD Maintenance and Operations department, Salas O'Brien, and Architectural Alliance for project installation and completion.

3.4 Pricing:

Proposals must clearly specify any premise needs that are to be provided by the customer

Vendors should state in writing that all furnished information, including prices, will remain valid for 120 days from the date their proposal is received by BISD.

Competing scenarios may be included in a single CSP response, but must be presented as discrete options, with complete technical and pricing information presented separately for each option.

The Proposer will deliver a presentation of the service comprised of:

a. Installation pricing broken out by line item. (Price Book)
b. Comparison pricing to RS Means
c. Implementation timeline
d. All pricing/architecture scenarios presented shall:
    a. Identify installation and one-time-only (OTO) charges as a separate line item

3.5 Evaluation and Award Criteria:

The award shall be made by the Purchasing Department based upon what is deemed to provide the most cost effective and beneficial service to the district.

Evaluation will be based approximately on the following parameters:

1.	Price	25 pts.
2.	Background and relevant experience	20 pts.
3.	References of prior clients	15 pts.
4.	Responsiveness to Beaumont ISD requirements	15 pts.
5.	Preparation and responsiveness of proposal	10 pts.
6.	Prior work with Texas school districts	15 pts.

Bids will be solicited from multiple vendors thru advertisement in local and regional papers.

INSTRUCTIONS TO BIDDERS

GENERAL TERMS AND CONDITIONS OF BIDDING AND TERMS OF CONTRACT

By execution of this document, the vendor accepts all general and special conditions of the contract as outlined below and in the specifications.

1.1 Bid Response

Bid Submission

a. **Electronic Response. Electronic submissions will not be accepted for this CSP.** Any problems with hard copy submissions, please call Doris Brown at 409-617-5241.

b. **Hard Copy Response.**, Paper responses will be accepted at the address below.

Bids will be accepted at the address listed below until the time and date specified herein, and immediately after will be publicly opened and read aloud.

All bids shall be **plainly marked with the Invitation for Bid number**, due date, and the bidder's name and address.

Beaumont Independent School
District Board Purchasing Division
Beau W. Carroll
3395 Harrison Avenue
Beaumont, TX 77706

1.2 Authorized Signatures

The bid must be executed personally by the vendor, duly authorized partner of the partnership, or duly authorized officer of the corporation. If executed by an agent, a power of attorney or other evidence of authority to act on behalf of the vendor shall accompany the bid to become a valid bid.

1.3 Late Bids

Bids must be in the office of the Beaumont Independent School District Board of Trustees Purchasing Agent before or at the specified time and date bids are due. Bids received after the submission deadline shall be rejected as non-responsive and returned unopened.

1.4 Withdrawal of Bids Prior to Bid Opening

A bid may be withdrawn before the opening date by submitting a written request to the Purchasing Agent. If time allows the bidder may submit a new bid. Bidder assumes full responsibility for submitting a new bid before or at the specified time and date bids are due. Beaumont Independent School District Board of Trustees reserves the right to withdraw a request for bids before the opening date.

1.5 Withdrawal of Bids After Bid Opening

Bidder agrees that its offer may not be withdrawn or cancelled by the vendor for a period of ninety (90) days following the date and time designated for the receipt of bids unless otherwise stated in the bid and/or specifications.

1.6 Bid Amounts

Bids shall show net prices, extensions where applicable and net total. In case of conflict between unit price and extension, the unit price will govern. Any ambiguity in the bid as a result of omission, error, unintelligible or illegible wording shall be interpreted in the favor of Beaumont Independent School District Board of Trustees.

1.7 Exceptions and/or Substitutions

All bids meeting the intent of the specifications and plans will be considered for award. Vendors taking exception to the specifications and plans, or offering substitutions, shall state these exceptions in the section provided. If bid is made on an article other than the one specified, which a bidder considers comparable, the name and grade of said article must be specified in the bid and sufficient specifications and descriptive data must accompany same to permit thorough evalua- tion. The absence of stated exceptions and/or substitutions shall indicate that the vendor has not taken any exceptions to the specifications and shall be responsible to perform in strict accordance with the specifications. As a matter of practice, Beaumont Independent School District Board of Trustees rejects exception(s) and /or substitutions as non-responsive but reserves the right to accept any and/or all of the exception(s) and/or substitution(s) deemed to be in the best interest of Beaumont Independent School District Board of Trustees.

1.8 Changes and Addenda to Bid Documents

Each change or addendum issued in relation to this CSP document will be posted on the district website and will be on file in the Office of the Purchasing Agent. Any interpretations, corrections or changes to the specifications and plans will be made by addenda no later than forty-eight (48) hours prior to the bid opening.

It shall be the bidder's responsibility to make inquiry as to change or addenda issued. All such changes or addenda shall become part of the contract and all bidders shall be bound by such addenda. Information on all changes or addenda issued will be available at the Office of the Beaumont Independent School District Purchasing Agent.

1.9 Descriptions

Unless otherwise specified, any reference to make, manufacturer and/or model used in the bid specifications is merely descriptive and not restrictive, and is used only to indicate type, style, or quality of material desired.

1.10 Bid Alterations

Bids cannot be altered or amended after submission deadline. Any interlineations, alterations, or erasures made before opening time must be initialed by the signer of the bid, guaranteeing authenticity.

1.11 Tax Exempt Status

Beaumont Independent School District Board of Trustees is exempt from federal excise tax and state sales tax. Unless the bid form or specifications specifically indicate otherwise, the bid price must be net, exclusive of above-mentioned taxes and will be so construed. Therefore, the bid price shall not

include taxes.

1.12 Quantities

Quantities indicated are estimated quantities only and are not a commitment to buy. Approximate usage does not constitute an order, but only implies the probable quantity that will be used. Commodities will be ordered on an as-needed basis. Bidder is responsible for accurate final counts.

1.13 Bid Award

Award of contract shall be made to the most responsible, responsive bidder, whose offer is determined to be the best value, taking into consideration the relative importance of price. Beaumont Independent School District Board of Trustees reserves the right to be the sole judge as to whether items bid will serve the purpose intended. Beaumont Independent School District Board of Trustees reserves the right to accept or reject in part or in whole any bid submitted, and to waive any technicalities or informalities for the best interest of the Beaumont Independent School District. Beaumont Independent School District Board of Trustees reserves the right to award based upon individual line items, sections or total bid.

1.14 Silence of Specifications for Complete Units

All materials, equipment and/or parts that will become a portion of the completed work, including items not specifically stated herein but, necessary to render the service(s) complete and operational per the specifications, are to be included in the bid price. Vendor may be required to furnish evidence that the service, as bid, will meet or exceed these requirements.

1.15 General Bid Bond/Surety Requirements

Failure to furnish bid bond/surety, if requested, will result in bid being declared non-responsive. Non-responsive bids will not be considered for award.

1.16 Responsiveness

A responsive bid shall substantially conform to the requirements of this Invitation to Bid and/or specifications contained herein. Bidders who substitute any other terms, conditions, specifications and/or requirements or who qualify their bids in such a manner as to nullify or limit their liability to the contracting entity shall have their bids deemed non-responsive. Also, bids containing any clause that would limit contracting authority shall be considered non-responsive. Examples of non-responsive bids include but shall not be limited to: a) bids that fail to conform to required delivery schedules as set forth in the bid request; b) bids with prices qualified in such a manner that the bid price cannot be determined, such as with vague wording that may include “price in effect at the time of delivery,” and c) bids made contingent upon award of other bids currently under consideration.

1.17 Responsible Standing of Bidder

To be considered for award, bidder must at least: have the ability to obtain adequate financial resources, be able to comply with required or proposed delivery/completion schedule, have a satisfactory record of performance; have a satisfactory record of integrity and ethics, and be otherwise qualified and eligible to receive award.

1.18 Proprietary Data

Bidder may, by written request, indicate as confidential any portion(s) of a bid that contain proprietary information, including manufacturing and/or design processes exclusive to the vendor. Beaumont Independent School District Board of Trustees will protect from public disclosure such portions of a bid, unless directed otherwise by legal authority, including existing Open Records Acts.

1.19 Public Bid Opening

Bidders are invited to be present at the opening of bids. After the official opening of bids, a period of not less than one week is necessary to evaluate bids. The amount of time necessary for bid evaluation may vary and is determined solely by the Beaumont Independent School District. Following the bid evaluation, all bids submitted are available for public review. COVID precautions are currently in place and may alter bid opening processes.

1.20 Waiver of Subrogation

Bidder and bidder's insurance carrier waive any and all rights whatsoever with regard to subrogation against Beaumont Independent School District Board of Trustees as an indirect party to any suit arising out of personal or property damages resulting from bidder's performance under this agreement.

1.21 Specifications

Unless otherwise stated by the bidder, the bid will be considered as being in accordance with Beaumont Independent School District's applicable standard specifications, and any special specifications outlined in the bid document. References to a particular trade name, manufacturer's catalogue, or model number are made for descriptive purposes to guide the bidder in interpreting the requirements of Beaumont Independent School District, and should not be construed as excluding bids on other types of materials, equipment, and supplies. However, the bidder, if awarded a contract, will be required to furnish the particular item referred to in the specifications or description unless departure or substitution is clearly noted and described in the bid. Beaumont Independent School District reserves the right to determine if equipment/ product being bid is an acceptable alternate. All goods shall be new unless otherwise so stated in the bid. Any unsolicited alternate bid, or any changes, insertions, or omissions to the terms and conditions, specifications, or any other requirements of the bid, may be considered non-responsive.

1.22 Currency

Prices calculated by the bidder shall be stated in U.S. dollars.

1.23 Non Performance

Continuing non-performance of the bidder in terms of specifications shall be a basis for termination of the contract bid. Cancellation by BISD may be made upon thirty (30) days written notice to the successful vendor. The district shall not pay for services, equipment or supplies which are unsatisfactory. Vendors will be given reasonable opportunity (30 calendar days) before termination, to correct deficiencies. This however, shall in no way be construed as negating the basis for

termination for non-performance.

1.24 References

All vendors shall submit a list of at least three references for which vendor has provided like products or services. References will include contact name and telephone number. Bids submitted without three references may be disqualified from consideration.

1.25 **Texas Education Code**, Section 44.034, Notification of Criminal History, Subsection (a) states "a person or business entity that enters into a contract with a school district must give advance notice to the district if the person or an owner or operator of the business entity has been convicted of a felony. This notice must include a general description of the conduct resulting in the conviction of a felony." Bidders will be required to submit a "Felony Conviction Notice" with their bids. (A copy is included with this bid.)

1.26 Pricing

Prices shall be stated in units of quantity specified in the bid documents. In case of discrepancy in computing the amount of the bid, the unit price shall govern.

2.0 Performance

2.1 Design, Strength, and Quality

Design, strength, and quality of materials and workmanship must conform to the highest standards of manufacturing and engineering practices. The apparent silence of specifications and/or plans as to any detailed description concerning any point shall be regarded as meaning that only the best commercial practices are to prevail. All interpretations of these specifications and/or plans shall be made on the basis of this statement.

2.2 Age and Manufacture

All tangible goods being bid must be new and unused, unless otherwise specified, in first-class condition, of current manufacture, and furnished ready to use. All items not specifically mentioned that are required for a complete unit shall be furnished.

2.3 Delivery Location

All deliveries will be made to the address(es) specified on the purchase order during normal working hours of 8:00 a.m. to 4:00 p.m., Monday through Friday, unless otherwise authorized by the Purchasing Agent or designee.

2.4 Delivery Schedule

Delivery time may be an important consideration in the evaluation of best value. The maximum number of days necessary for delivery ARO shall be stated in the space, if provided, on the bid form.

2.5 Delivery Charges

All delivery and freight charges, F.O.B. destination shown on Beaumont Independent School District Board of Trustees purchase order, as necessary to perform contract are to be included in the bid price.

2.6 Operating Instructions and Training

Clear and concise operating instructions and descriptive literature will be provided in English, if requested. On-site detailed training in the safe and efficient use and general maintenance of item(s) purchased shall be provided as needed at the request of Beaumont Independent School District Board of Trustees. Instructions and training shall be at no additional cost to the Beaumont Independent School District.

2.7 Storage

Bidder agrees to provide storage of custom ordered materials, if requested, for up to thirty (30) calendar days.

2.8 Compliance with Federal, State, Beaumont Independent School District, and Local Laws

Bids must comply with all federal, state, Beaumont Independent School District and local laws, including, but not limited to, all applicable standard safety, emission, and noise control requirements. Any vehicles or equipment shall contain all standard safety, emission, and noise control requirements required for the types and sizes of equipment at the time of their manufacture. The contractor agrees, during the performance of work or service, to comply with all applicable codes and ordinances of Beaumont Independent School District Board of Trustees or the State of Texas as they may apply, as these laws may now read, or as they may hereafter be changed or amended.

2.9 OSHA

The bidder will certify all equipment complies with all regulations and conditions stipulated under the Williams-Steiger Occupational Safety and Health Act of 1971, as amended. The successful bidder will further certify that all items fur- nished under this project will confirm and comply with federal and State of Texas OSHA standards. The successful bidder will agree to indemnify and hold harmless Beaumont Independent School District Board of Trustees for any and all damages that may be assessed against the Beaumont Independent School District.

2.10 Patents and Copyrights

The successful vendor agrees to protect the Beaumont Independent School District from claims involving infringements of patents and/or copyrights.

2.11 Samples, Demonstrations and Testing

At Beaumont Independent School District Board of Trustee's request and direction, bidder shall provide product samples and/or testing of items bid to ensure compliance with specifications. Samples, demonstrations and/or testing may be requested at any point prior to or following bid award. Samples, demonstrations and/or testing may be requested upon delivery and/or any point during the term of resulting contract. All samples (including return thereof), demonstrations, and/or testing shall be at the expense of the bidder/vendor.

2.12 Acceptability

All articles enumerated in the bid shall be subject to inspection by an officer designated for that

purpose by Beaumont Independent School District Board of Trustees. If found inferior to the quality called for, or not equal in value to the specifications, deficient in workmanship or otherwise, this fact shall be certified to the Purchasing Agent, who shall have the right to reject the whole or any part of the same. Items and/or work determined to be contrary to specifications must be replaced at the vendor's expense. Inferior items not retrieved by the vendor within thirty (30) calendar days, or an oth- erwise agreed upon time, shall become the property of the Beaumont Independent School District. If disposal of such items warrants an expense, an amount equal to the disposal expense will be deducted from amounts payable to the vendor.

2.13 Maintenance

Maintenance required for equipment bid should be available in Beaumont Independent School District Board of Trustees by a manufacturer authorized maintenance facility. Cost for this service shall be shown on the bid sheet as requested or on a separate sheet, as required. If Beaumont Independent School District Board of Trustees opts to include maintenance, it shall be so stated in the purchase order and said cost will be included. Service will commence only upon expiration of applicable warranties and should be priced accordingly.

2.14 Material Safety Data Sheets

Under the "Hazardous Communications Act," common known as the "Texas Right to Know Act," a bidder must provide the user department, with each delivery, material safety data sheets which are applicable to hazardous substances defined in the Act. Failure of the bidder to furnish this documentation, will be cause to reject any bid applying thereto.

2.15 Evaluation

Evaluation shall be used as a determinant as to which services are the most efficient and/or most economical for the Beaumont Independent School District. It shall be based on all factors having a bearing on price and performance of the items in the user environment. All bids are subject to tabulation by the Beaumont Independent School District Purchasing Department and recommendation to Beaumont Independent School District Board of Trustees. Compliance with all bid requirements and needs of the using department are considered in evaluating bids. Pricing is **not** the only criteria for making a recommendation. The Beaumont Independent School District Purchasing Department reserves to right to contact any bidder, at any time, to clarify, verify or requirement information with regard to this bid.

3.0 Purchases

3.1 Purchase Orders

A purchase order(s) shall be generated by the Beaumont Independent School Purchasing Agent to the successful vendor. The purchase order number must appear on all itemized invoices and packing slips. The Beaumont Independent School District will not be held responsible for any work orders placed and/or performed without a valid current purchase order number. Payment will be made for all services rendered and accepted by the contract administrator for which a valid invoice has been received.

3.2 Invoices

a) All invoices shall reference the Purchase Order number. Invoices shall reference the bid item number or a detailed description for each item invoiced. If an item purchased and itemized on the invoice does not correspond to an item in any of the categories awarded to the vendor, invoice shall reference the item as "N/C" to indicate that it is a non-contract item. This requirement is to assist the Beaumont Independent School District in verifying contract pricing on all invoices. Payment will be made under terms of net thirty (30) days unless otherwise agreed upon by seller and the purchasing department. Email: invoices@bmtisd.com.

Mail to:
Beaumont Independent School District ATTN: Accounts Payable Department
P. O. Box 672
Beaumont, TX
77704

Email: invoices@bmtisd.com

b) Payment shall not be due until the above instruments are submitted after delivery. Suppliers should keep the Accounts Payable Department advised of any changes in remittance addresses.

c) Do not include Federal Excise, State or City Sales Tax. School District shall furnish tax exemption certificate, if required.

d) Vendors that repeatedly fail to supply complete, accurate, and timely billing to the Accounts Payable office may be omitted from our vendor list.

3.3 Prompt Payment

In accordance with the State of Texas Prompt Payment Act, Article 601f V.T.C.S., payment will be made after receive and acceptance by the Beaumont Independent School District of the merchandise ordered and of a valid invoice. Successful bidder(s) is required to pay subcontractors within ten (10) days after the successful bidder receives payment from the Beaumont Independent School District.

Beaumont Independent School District will pay for the requested goods and/or services as promptly as possible, but in any event, no later than thirty (30) days after 1) receipt of goods; or 2) the day the service is complete; or 3) the day the district receives the invoice for the goods and/or services, whichever is later.

3.4 Contract Definition

The General Conditions of Bidding and Terms of Contract, Specifications, Plans, Bidding Forms, Addenda, and any other documents made a part of this bid shall constitute the complete bid. This bid,

when duly accepted by Beaumont Independent School District Board of Trustees, shall constitute a contract equally binding between the successful bidder and Beaumont Independent School District Board of Trustees.

3.5 Contract Agreement

Once a contract is awarded, the unit prices offered by the successful bidder shall remain firm for the term of the one year contract. **Contract shall commence on date of award and continue with an option to renew annually for up to an additional Three (3) year period, if mutually agreed to by Beaumont Independent School District Board of Trustees and Contractor.**

3.6 Change Order

No different or additional terms will become part of this contract with the exception of a change order. No oral statement of any person shall modify or otherwise change, or affect the terms, conditions or specifications stated in the resulting contract. All change orders to the contract will be made in writing and at the discretion and approval of Beaumont Independent School District. No change order will be binding unless signed by an authorized representative of the Beaumont Independent School District and the vendor.

3.7 Price Re-determination

A price re-determination may be considered by Beaumont Independent School District Board of Trustees only at the twelve (12) month and twenty-four (24) month anniversary dates of the contract. All requests for price re-determination shall be in written form. Cause for such request, i.e., manufacturer's direct cost, postage rates, Railroad Commission rates, Federal/State minimum wage law, Federal/State unemployment taxes, F.I.C.A, Insurance Coverage Rates, etc., shall be substantiated in writing by the source of the cost increase. The bidder's past experience of honoring contracts at the bid price will be an important consideration in the evaluation of the lowest and best bid. Beaumont Independent School District Board of Trustees reserves the right to accept or reject any/all requests for price re-determination as it deems to be in the best interest of the Beaumont Independent School District.

3.8 Termination

Beaumont Independent School District Board of Trustees reserves the right to terminate the contract for default if the bidder breached any of the terms therein, including warranties of bidder or if the bidder become insolvent or commits acts of bankruptcy. Such right of termination is in addition to and not in lieu of any other remedies which Beaumont Independent School District Board of Trustees may have in law or equity. Default may be construed as, but not limited to, failure to deliver the proper goods and/or service within the proper amount of time, and/or to properly perform any and all services required to Beaumont Independent School District Board of Trustees's satisfaction and/or to meet all other obligations and requirements. Contracts may be terminated without cause upon thirty (30) days' written notice to either party unless otherwise specified. Beaumont Independent School District Board of Trustees reserves the right to award canceled contract to the next lowest bidder. Bidder, in submitting this bid, agrees that Beaumont Independent School District Board of Trustees shall not be liable to prosecution for damages in the event that the Beaumont Independent School District declares the bidder in default.

3.9 Conflict of Interest

Employees of the Beaumont Independent School District are not permitted to maintain financial interest in, or receive payment, directly or indirectly, borrow from, lend to, invest in, or engage in any substantial financial transaction with any individual, organization, supplier, or subcontractor who does business with the Beaumont Independent School District without disclosure.

When conflict of interest is discovered, it shall be grounds for termination of contract.

3.10 Injuries or Damages Resulting from Negligence

Successful vendor shall defend, indemnify and save harmless Beaumont Independent School District Board of Trustees and all its officers, agents and employees from all suits, actions, or other claims of any character, name and description brought for or on account of any injuries or damages received or sustained by any person, persons, or property on account of any negligent act or fault of the successful vendor, or of any agent, employee, subcontractor or supplier in the execu- tion of, or performance under, any contract which may result from bid award. Successful vendor shall pay any judgment with cost which may be obtained against Beaumont Independent School District Board of Trustees growing out of such injury or damages.

3.11 Interest by Public Officials

No public official shall have interest in this contract, in accordance with Texas Local Government Code.

3.12 Warranty

The successful vendor shall warrant that all materials utilized in the performance of this contract shall conform to the proposed specifications and/or all warranties as stated in the Uniform Commercial Code and be free from all defects in material, workmanship and title.

3.13 Uniform Commercial Code

The successful vendor and Beaumont Independent School District Board of Trustees agree that both parties have all rights, duties, and remedies available as stated in the Uniform Commercial Code.

3.14 Venue

This agreement will be governed and construed according to the laws of the State of Texas. This agreement is performable in the Beaumont Independent School District of Beaumont, Texas.

3.15 Sale, Assignment, or Transfer of Contract

The successful vendor shall not sell, assign, transfer or convey this contract, in whole or in part, without the prior written consent of Beaumont Independent School District Board of Trustees.

3.16 Silence of Specifications

The apparent silence of these specifications as to any detailed description concerning any point, shall be regarded as meaning that only the best commercial practices are to prevail. All interpretations of these specifications shall be made on the basis of this statement.

3.17 Texas Education Code

Section 44.034, Notification of Criminal History, Subsection (a) states "a person or business entity that enters into a contract with a school district must give advance notice to the district if the person or an owner or operator of the business entity has been convicted of a felony. This notice must include a general description of the conduct resulting in the conviction of a felony." Bidders will be required to submit a "Felony Conviction Notice" with their bids. (A copy is included with this bid.)

3.18 Utilization of Minority Business Enterprises: It is the policy of the Beaumont Independent School District that minority business enterprises and concerns shall have the maxim practicable opportunity to participate in the performance of BISD contracts. Supplier agrees to use his best efforts to carry out this policy in the award of his sub-contracts to the fullest extent consistent with his efficient performance of contract with BISD. As used herein, the term "minority business enterprise" means (a) business at least fifty-one (51%) percent of which is owned by minority members, or in the case of a corporation, at least fifty-one (51%) percent of issued stock of any class is owned by minority shareholders and

(b) the daily management functions of the entity are the responsibility of one or more minority members. A "minority member" is defined to mean a person who is Black, Hispanic, Asian American, American Indian, Alaskan Native, a woman or handicapped.

3.19 Gratuities

The Buyer may, by written notice to the Seller, cancel this contract without liability to seller if it is determined by Buyer that gratuities, in the form of entertainment, gifts, or otherwise, were offered or given by the Seller, or any agent, or representative of the Seller, to any officer or employee of the School District with the view toward securing a contract or any determinations with respect to the performing of such a contract. In the event this contract is cancelled by Buyer pursuant to this provision, Buyer shall be entitled in addition to any other rights and remedies, to recover or withhold the amount of the cost incurred by Seller in providing such gratuities.

3.20 Insurance Requirements

EACH BID MUST BE ACCOMPANIED BY CERTIFICATES OF COVERAGE FROM WELL REGARDED INSURANCE COMPANIES REFLECTING THE FOLLOWING COVERAGE:

(Certificates must be issued in the name of the company submitting the bid.)

a. Worker's Compensation and Employers Liability

Covering all work contemplated in the contract by the bid. Amount of statutory requirement.

b. General Liability

Written on a Comprehensive General Liability or Commercial General Liability form to include completed operations/products and addition of the Broad Form Comprehensive General Liability Endorsement and removal of any X (explosion), C (collapse) and U (underground) exclusions. Minimum General Aggregate Limit of $1,000,000 with Beaumont Independent School District named as an additional insured.

c. Automobile Liability

Issued on a Comprehensive Automobile Liability form covering all owned and non-owned vehicles.

1.	VENDOR INFORMATION

COMPANY NAME:	

MAINTENANCE ADDRESS:	PHONE:
	TOLL FREE:
REMITTANCE ADDRESS:	FAX:
	TOLL FREE FAX:

INTERNET ADDRESS:	
CUSTOMER SERVICE E-MAIL:	

DO YOU ACCEPT PURCHASE ORDERS	CASH PAYMENT TERMS (Net 30 Days)	MINIMUM ORDER AMOUNT, IF ANY
YES ☐ NO ☐	OR _____% Discount in Net _____ Days	

PRINCIPALS AND KEY PERSONNEL
PRESIDENT / OWNER:
GENERAL MANAGER:
ACCOUNTING / ACCOUNTS RECEIVABLE MANAGER:
SALES MANAGER:

YEARS / MONTHS IN BUSINESS WITH PRESENT NAME:		NUMBER OF EMPLOYEES:	

COMPANY IS: ☐ MANUFACTURER OR PRODUCER, ☐ DISTRIBUTOR, ☐ WHOLESALER,
☐ RETAILER, ☐ CONSULTING, ☐ CONSTRUCTION, ☐ BROKER, ☐ SERVICE,
☐ OTHER: _____

BEAUMONT ISD– PURCHASING DEPARTMENT

Notice to Vendors: Conflict of Interest Questionnaire Required by Chapter 176 of the Texas Local Government Code

Effective January 1, 2006, any person or entity who contracts or seeks to contract with BISD for the sale or purchase of property, goods, or services as well as agents of such persons, (hereafter referred to as Vendors) are required to file a Conflict of Interest Questionnaire with the District. Each covered person or entity who seeks to or who contracts with BISD is responsible for complying with any applicable disclosure requirements.

The Conflict of Interest Questionnaire must be filed:

· No later than the seventh business day after the date that the Vendor begins contract discussions or negotiations with the government entity, or submits to the entity an application, response to a request for proposal or bid, correspondence, or other writing related to a potential agreement with the entity.

· The Vendor also shall file an updated questionnaire no later than September 1 of each year in which a covered transaction is pending, ***and*** the seventh business day after the date of an event that would make a statement in the questionnaire incomplete or inaccurate.

Note: A Vendor is not required to file an updated questionnaire if the person had filed an updated statement on or after June 1, but before September 1 of the year.

The Conflict of Interest Questionnaire may be downloaded from the Texas Ethics Commission's website at: http://www.ethics.state.tx.us/forms/CIQ.pdf

Completed forms should be sent to:

Beaumont Independent School District
Attn: Purchasing Department
3395 Harrison Avenue
Beaumont, Texas 77706

The Local Government Officers of the Beaumont Independent School District are:

Board of Trustees:	Robert C Dunn, President Woodrow Reece, Vice President Stacey Lewis, Jr., Secretary Joe A. Evans, Member Matilda Hickman, Member Denise Wallace-Spooner, Member Kevin Reece, Member
Superintendent:	Dr. Shannon Allen
Others:	Cheryl Hernandez, Peggy Haynes, Allen DeVault, and Beau Carroll

CONFLICT OF INTEREST QUESTIONNAIRE

FORM CIQ

For vendor doing business with local governmental entity

This questionnaire reflects changes made to the law by H.B. 23, 84th Leg., Regular Session.

This questionnaire is being filed in accordance with Chapter 176, Local Government Code, by a vendor who has a business relationship as defined by Section 176.001(1-a) with a local governmental entity and the vendor meets requirements under Section 176.006(a).

By law this questionnaire must be filed with the records administrator of the local governmental entity not later than the 7th business day after the date the vendor becomes aware of facts that require the statement to be filed. *See* Section 176.006(a-1), Local Government Code.

A vendor commits an offense if the vendor knowingly violates Section 176.006, Local Government Code. An offense

OFFICE USE ONLY

Date Received

1 **Name of vendor who has a business relationship with local governmental entity.**

2 **Check this box if you are filing an update to a previously filed questionnaire.** (The law req ☐ that you file an updated completed questionnaire with the appropriate filing authority not later than the 7th business day after the date on which

3 **Name of local government officer about whom the information is being disclosed.**

_____
Name of Officer

4 **Describe each employment or other business relationship with the local government officer, or a family member of the officer, as described by Section 176.003(a)(2)(A). Also describe any family relationship with the local government officer. Complete subparts A and B for each employment or business relationship described. Attach additional pages to this Form CIQ as necessary.**

A. Is the local government officer or a family member of the officer receiving or likely to receive taxable income, other than investment income, from the vendor?

☐ Yes ☐ No

B. Is the vendor receiving or likely to receive taxable income, other than investment income, from or at the direction of the local government officer or a family member of the officer AND the taxable income is not received from the local governmental entity?

☐ Yes ☐ No

5 **Describe each employment or business relationship that the vendor named in Section 1 maintains with a corporation or other business entity with respect to which the local government officer serves as an officer or director, or holds an ownership interest of one percent or more.**

6 ☐ Check this box if the vendor has given the local government officer or a family member of the officer one or more gifts as described in Section 176.003(a)(2)(B), excluding gifts described in Section 176.003(a-1).

7

_____ _____
Signature of vendor doing business with the governmental entity Date

✉ REQUIRED FORM

Company Name: _____

VENDOR COMPLIANCE TO STATE LAW

The 1985 Session of the Texas Legislature passed House Bill 620 relative to the award of contracts to nonresident bidders. This law provides that, in order to be awarded a contract as low bidder, nonresident bidders (out-of-State contractors whose corporate offices or principal place of business are outside of the State of Texas) bid projects for construction, improvements, supplies or services in Texas at an amount lower than the lowest Texas resident bidder by the same amount that a Texas resident bidder would be required to underbid a nonresident bidder in order to obtain a comparable contract in the State in which the nonresident's principal place of business is located. The appropriate blanks in Section A must be filled out by all out-of-State or nonresident bidders in order for your bid to meet specifications. The failure of out-of-State or nonresident contractors to do so will automatically disqualify that bidder. Resident bidders must check the box in Section B.

☐ A. Nonresident vendors in _____ (give State), our principal place of business, are required to be _____ percent lower than resident bidders by State law. A copy of the Statute is attached.

Nonresident vendors in _____ (give State), our principal place of business, are not required to underbid resident bidders.

☐ B. Our principal place of business or corporate offices are in the State of Texas.

BIDDER:

_____ By:

_____

(Please print)

_____ Signature: _____

_____ Title: _____

City State Zip (Please print)

THIS FORM MUST BE RETURNED WITH YOUR BID

☒ REQUIRED FORM

CERTIFICATE OF INTERESTED PARTIES (FORM 1295)

In 2015, the Texas Legislature adopted House Bill 1295, which added section 2252.908 of the Government Code. The law states that a governmental entity or state agency may not enter into certain contracts with a business entity unless the business entity

submits a disclosure of interested parties to the governmental entity or state agency at the time the business entity submits the signed contract to the governmental entity or state agency. The law applies only to a contract of a governmental entity or state agency that either (1) requires an action or vote by the governing body of the entity or agency before the contract may be signed or (2) has a value of at least $1 million. The disclosure requirement applies to a contract entered into on or after January 1, 2016.

The Texas Ethics Commission was required to adopt rules necessary to implement that law, prescribe the disclosure of interested parties form, and post a copy of the form on the commission's website. The commission adopted the Certificate of Interested Parties form (Form 1295) on October 5, 2015. The commission also adopted new rules (Chapter 46) on November 30, 2015, to implement the law. The commission does not have any additional authority to enforce or interpret House Bill 1295.

Filing Process:

By January 1, 2016, the commission will make available on its website a new filing application that must be used to file Form 1295. A business entity must use the application to enter the required information on Form 1295 and print a copy of the completed form, which will include a certification of filing that will contain a unique certification number. An authorized agent of the business entity must sign the printed copy of the form and have the form notarized. The completed Form 1295 with the certification of filing must be filed with the governmental body or state agency with which the business entity is entering into the contract.

The governmental entity or state agency must notify the commission, using the commission's filing application, of the receipt of the filed Form 1295 with the certification of filing not later than the 30th day after the date the contract binds all parties to the contract. The commission will post the completed Form 1295 to its website within seven business days after receiving notice from the governmental entity or state agency.

Information regarding how to use the filing application will be available on this site by January 1, 2016.
https://www.ethics.state.tx.us/whatsnew/elf_info_form1295.htm

The Form 1295 will be completed by the awarded vendor upon notification by the District.

Please sign below agreeing that the authorized representative of your business will perform the requirements above.

_____ _____

Signature of Authorized Representative Date

Contract Identification Number: 22.26

THIS FORM MUST BE RETURNED WITH YOUR BID

☒ REQUIRED FORM

4.	**NON COLLUSIVE BIDDING CERTIFICATE & ACKNOWLEDGMENT**
	By submission of this Bid, the Vendor certifies that: (a) the Bid has been independently arrived at without collusion with any other vendor or with any competitor. (b) The Bid has not been knowingly disclosed and shall not be knowingly disclosed, prior to the opening of Bids for this project, to any other vendor, competitor or potential competitor. (c) No attempt has been or will be made to induce any other person, partnership or corporation to submit or not to submit a Bid. (d) The person signing this Bid certifies that he has fully informed himself regarding the accuracy of the statements contained in this certification and under the penalties being applicable to the Vendor as well as to the person signing in its behalf. • I certify that the above information is true and correct. ☐ **YES**
5.	RESIDENT / NONRESIDENT CERTIFICATION
	• **RESIDENT VENDOR** - I certify that my company is a "resident vendor." ☐ **YES**
	• **NON RESIDENT VENDOR** - As defined by Texas Government Code 2252.001, a "nonresident vendor" means a vendor whose principal place of business is not in Texas, but excludes a contractor whose ultimate parent company or majority owner has its principal place of business in Texas. If you qualify as a "nonresident vendor," you must furnish the following information: **Resident state address?** (The state in which your principal place of business is located.) **Street, City, State, Zip**:
6.	**FELONY CONVICTION NOTIFICATION**
	State of Texas Legislative Senate Bill No.1, Section 44.034, Notification of Criminal History, Subsection (a), states: "a Person or business entity that enters into a contract with a school district must give advance notice to the district if the Person or an owner or operator of the business entity has been convicted of a felony. The notice must include a general description of the conduct resulting in the conviction of a felony." Subsection (b) states "a school district may terminate a contract with a person or business entity if the district determines that the person or business entity failed to give notice as required by Subsection (a) or misrepresented the conduct resulting in the conviction. The District must compensate the person or business entity for services performed before the termination of the contract." This Notice Is Not Required of a Publicly Held Corporation. **Check the appropriate box and sign the form.**
	☐ My firm is a publicly held corporation; therefore, this reporting requirement is not applicable.
	☐ My firm is not owned or operated by anyone who has been convicted of a felony.
	☐ My firm is owned or operated by the following individual(s) who has/have been convicted of a felony:
	Name of Felon:
	Details of Conviction(s)

I (We) the undersigned, agent for the firm, named below certify that the above information is true and correct to the best of my knowledge.

Name/Title: _____ Company Name: _____

Original Signature: _____ Date _____

THIS FORM MUST BE RETURNED WITH YOUR BID

☒ REQUIRED FORM

7.	**ADDENDA ACKNOWLEDGEMENT**
	• If no amendments were received **then leave this blank or write N/A**. • If any amendments were received, Respondent acknowledges receipt of Addenda numbered _____ through _____ and has incorporated the provisions thereof into the Bid/Proposal.

8.	**RENEWAL OF CONTRACT**
	This contract will be effective, unless otherwise noted, for one (1) year with renewal options for THREE (3) additional one year periods (as stated in the terms and conditions), at the District's option and with the acceptance of the awarded vendor(s): In the event this Bid expires before another Bid is awarded, the vendor shall extend the contract on a month-to-month basis by mutual agreement.

9.	BID VALIDITY AGREEMENT		
	• Bid shall remain valid, pending award, through:	**YES** ☐ or	(date):
	• Prices & Discounts effective through	**YES** ☐ or	(date):
	• Prompt payment discount allowed: (% / Days)	**%**	**Days**

I (We) the undersigned, agent for the firm, named below certify that the above information is true and correct to the best of my knowledge.

Name/Title: _____ Company Name: _____

Original Signature: _____ Date _____

List any and all exceptions on a separate, attached sheet titled "exceptions."

THIS FORM MUST BE RETURNED WITH YOUR BID

☒ REQUIRED FORM

Debarment Statement

CERTIFICATION REGARDING DEBARMENT, SUSPENSION, AND OTHER RESPONSIBILITY MATTERS (Executive Order 12549, Debarment and Suspension, 34 CFR Part 85)

Consultant certifies to the best of its knowledge and belief, that it and its principals:

1) ARE NOT presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;

☐ Yes ☐ No

2) HAVE NOT within a three-year period preceding award of this consulting agreement been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or Local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

Yes No

3) ARE NOT presently indicted for or otherwise criminally charged by a governmental entity (Federal, State or Local) with commission of any of the offenses enumerated in 34 CFR Part 85 Paragraph (2)(b)

☐ Yes ☐ No

4) HAVE NOT within a three-year period preceding award of this consulting agreement had one or more public transactions (Federal, State or Local) terminated for cause or default.

☐ Yes ☐ No

_____ _____

Consultant Signature Date

_____ _____

Typed or Printed Name
Contractual Agreement No.22.26

THIS FORM MUST BE RETURNED WITH YOUR BID

☒ REQUIRED FORM

House Bill 89 VERIFICATION

I, _____, the undersigned representative of

_____ Company or Business name

(hereafter referred to as company) **being an adult over the age of eighteen (18) years of age, verify that the company named-above, under the provisions of Subtitle F, Title 10, Government Code Chapter 2270:**

1. **Does not boycott Israel currently; and**
2. **Will not boycott Israel during the term of the contract the above-named Company, business or individual with the Beaumont Independent School District.**

Pursuant to Section 2270.001, Texas Government Code:

1. *"Boycott Israel" means refusing to deal with, terminating business activities with, or otherwise taking any action that is intended to penalize, inflict economic harm on, or limit commercial relations specifically with Israel, or with a person or entity doing business in Israel or in an Israeli-controlled territory, but does not include an action made for ordinary business purposes; and*
2. *"Company" means a for-profit sole proprietorship, organization, association, corporation, partnership, joint venture, limited partnership, limited liability partnership, or any limited liability company, including a wholly owned subsidiary, majority-owned subsidiary, parent company or affiliate of those entities or business associations that exist to make a profit.*

Senate Bill 252 Ch. 2252 Certification

Pursuant to Texas Government Code, Chapter 2252, Section 2252.152 and Section 2252.153, certify that the company named above is not listed on the website of the Comptroller of the State of Texas concerning the listing of companies that are identified under Section 806.051, Section 807.051 or Section 2253.153. I further certify that should the above-named company enter into a contract that is on said listing of companies on the website of the Comptroller of the State of Texas which do business with Iran, Sudan or any Foreign Terrorist Organization, I will immediately notify the Beaumont Independent School District's Purchasing Department.

_____ _____

_____

DATE

SIGNATURE OF COMPANY REPRESENTATIVE

THIS FORM MUST BE RETURNED WITH YOUR BID

☒ REQUIRED FORM **EDGAR CERTIFICATIONS**

FOR CONTRACT FUNDED BY U.S. FEDERAL GRANT

(NON-CONSTRUCTION CONTRACTS)

The EDGAR Certifications ("Certification") is made a part of a contract ("Contract") between the Beaumont Independent School District ("Beaumont ISD" or "District") and the vendor ("Vendor"), where such contract and Vendor are referenced on the last page of these certifications. The following certifications and provisions are required and apply when Beaumont ISD expends federal funds for any contract resulting from this procurement process. **Accordingly, the parties agree that the following terms and conditions are incorporated and made a part of the Contract in all situations where Vendor has been paid or will be paid with federal funds. Where there is a conflict between the terms of these Certifications and the terms of the underlying Contract, the terms of these Certifications shall prevail.**

I. REQUIRED CONTRACT PROVISIONS FOR NON-FEDERAL ENTITY CONTRACTS UNDER FEDERAL AWARDS
APPENDIX II TO 2 CFR PART 200

(A) Contracts for more than the simplified acquisition threshold currently set at $150,000, which is the inflation adjusted amount determined by the Civilian Agency Acquisition Council and the Defense Acquisition Regulations Council (Councils) as authorized by 41 U.S.C. 1908, must address administrative, contractual, or legal remedies in instances where contractors violate or breach contract terms, and provide for such sanctions and penalties as appropriate.

Pursuant to Federal Rule (A) above, when Beaumont ISD expends federal funds, Beaumont ISD reserves all rights and privileges under the applicable laws and regulations with respect to this procurement in the event of breach of contract by either party.

_____ Initials of Authorized Representative of Vendor

(B) Termination for cause and for convenience by the grantee or subgrantee including the manner by which it will be effected and the basis for settlement. (All contracts in excess of $10,000)

1. **Termination for Cause:** Pursuant to Federal Rule (B) above, when Beaumont ISD expends federal funds, Beaumont ISD reserves the right to immediately terminate any contract in excess of $10,000 resulting from this procurement process in the event of a breach or default of the agreement by Vendor in the event Vendor fails to: (1) meet schedules, deadlines, and/or delivery dates within the time specified in the procurement solicitation, contract, and/or a purchase order; (2) make any payments owed; or (3) otherwise perform in accordance with the contract and/or the procurement solicitation.

2. **Termination for Non-Appropriation of Funds for Multi-year or Multiple-year Contracts:** Performance by Beaumont ISD under the Contract for years subsequent to the current budget year may be dependent upon the appropriation and allotment of funds by the Texas State Legislature (the "Legislature"), allocation of funds by the Board of Trustees (the "Board"), and/or, if the Contract is funded fully or partially by Federal grant awards, the receipt of the Notice of Grant Award ("NOGA"). If the Legislature fails to appropriate or allot the necessary funds, the Board fails to allocate the necessary funds, and/or there is a change in the NOGA, then the District may terminate this Contract without further duty or obligation under the Contract.

3. **Termination for Convenience:** Beaumont ISD also reserves the right to terminate the contract immediately upon written notice to Vendor for convenience, with or without cause, if Beaumont ISD believes in its sole discretion that it is in the best interest of Beaumont ISD to do so.

If the contract is terminated in accordance with any of the terms referenced in Section (B) above, Beaumont ISD shall compensate Vendor for any work performed and accepted and goods delivered and accepted by Beaumont ISD as of the termination date. Any award under this procurement process is not exclusive and Beaumont ISD reserves the right to purchase goods and/or services from other vendors when it is in Beaumont ISD's best interest.

_____ Initials of Authorized Representative of Vendor

(C) Rights to Inventions Made Under a Contract or Agreement. If the Federal award meets the definition of "funding agreement" under 37 CFR §401.2 (a) and the recipient or subrecipient wishes to enter into a contract with a small business firm or nonprofit organization regarding the substitution of parties, assignment or performance of experimental, developmental, or research work under that "funding agreement," the recipient or subrecipient must comply with the requirements of 37 CFR Part 401, "Rights to Inventions Made by Nonprofit Organizations and Small Business Firms Under Government Grants, Contracts and Cooperative Agreements," and any implementing regulations issued by the awarding agency.

Pursuant to Federal Rule (F) above, when federal funds are expended by Beaumont ISD, Vendor certifies that during the term of an award for all contracts by Beaumont ISD resulting from this procurement process, Vendor agrees to comply with all applicable requirements as referenced in Federal Rule (F) above.

_____Initials of Authorized Representative of Vendor

(D) Clean Air Act (42 U.S.C. 7401-7671q.) and the Federal Water Pollution Control Act (33 U.S.C. 1251-1387), as amended— Contracts and subgrants of amounts in excess of $150,000 must contain a provision that requires the non-Federal award to agree to comply with all applicable standards, orders or regulations issued pursuant to the Clean Air Act (42 U.S.C. 7401-7671q) and the Federal Water Pollution Control Act as amended (33 U.S.C. 1251- 1387). Violations must be reported to the Federal awarding agency and the Regional Office of the Environmental Protection Agency (EPA).

Pursuant to Federal Rule (G) above, when federal funds are expended by Beaumont ISD, Vendor certifies that during the term of an award for all contracts by Beaumont ISD resulting from this procurement process, Vendor agrees to comply with all applicable requirements as referenced in Federal Rule (G) above.

_____Initials of Authorized Representative of Vendor

(E) Debarment and Suspension (Executive Orders 12549 and 12689)—A contract award (see 2 CFR 180.220) must not be made to parties listed on the government wide exclusions in the System for Award Management (SAM), in accordance with the OMB guidelines at 2 CFR 180 that implement Executive Orders 12549 (3 CFR part 1986 Comp., p. 189) and 12689 (3 CFR part 1989 Comp., p. 235), "Debarment and Suspension." SAM Exclusions contains the names of parties debarred, suspended, or otherwise excluded by agencies, as well as parties declared ineligible under statutory or regulatory authority other than Executive Order 12549.

Pursuant to Federal Rule (H) above, when federal funds are expended by Beaumont ISD, Vendor certifies that during the term of an award for all contracts by Beaumont ISD resulting from this procurement process, Vendor certifies that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participation by any federal department or agency.

_____Initials of Authorized Representative of Vendor

(F) Byrd Anti-Lobbying Amendment (31 U.S.C. 1352)—Contractors that apply or bid for an award exceeding $100,000 must file the required certification. Each tier certifies to the tier above that it will not and has not used Federal appropriated funds to pay any person or organization for influencing or attempting to influence an officer or employee of any agency, a member of Congress, officer or employee of Congress, or an employee of a member of Congress in connection with obtaining any Federal contract, grant or any other award covered by 31 U.S.C. 1352. Each tier must also disclose any lobbying with non-Federal funds that takes place in connection with obtaining any Federal award. Such disclosures are forwarded from tier to tier up to the non-Federal award.

Pursuant to Federal Rule (I) above, when federal funds are expended by Beaumont ISD, Vendor certifies that during the term and after the awarded term of an award for all contracts by Beaumont ISD resulting from this procurement process, the vendor certifies that it is in compliance with all applicable provisions of the Byrd Anti-Lobbying Amendment (31 U.S.C. 1352). The undersigned further certifies that:

(1) No Federal appropriated funds have been paid or will be paid for on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any agency, a Member of Congress, an officer or employee of congress, or an employee of a Member of Congress in connection with the awarding of a Federal contract,

the making of a Federal grant, the making of a Federal loan, the entering into a cooperative agreement, and the extension, continuation, renewal, amendment, or modification of a Federal contract, grant, loan, or cooperative agreement.

(2) If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any agency, a Member of Congress, an officer or employee of congress, or an employee of a Member of Congress in connection with this Federal grant or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying", in accordance with its instructions.

(3) The undersigned shall require that the language of this certification be included in the award documents for all covered sub-awards exceeding $100,000 in Federal funds at all appropriate tiers and that all subrecipients shall certify and disclose accordingly.

_____Initials of Authorized Representative of Vendor

(G) Procurement of Recovered Materials — Vendor agrees to comply with Section 6002 of the Solid Waste Disposal Act, as amended by the Resource Conservation and Recovery Act, where applicable. The requirements of Section 6002 include procuring only items designated in guidelines of the Environmental Protection Agency (EPA) at 40 CFR Part 247 that contain the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition, where the purchase price of the item exceeds $10,000 or the value of the quantity acquired during the preceding fiscal year exceeded $10,000; procuring solid waste management services in a manner that maximizes energy and resource recovery, and establishing an affirmative procurement program for procurement of recovered materials identified in the EPA guidelines.

_____Initials of Authorized Representative of Vendor

II. RECORD RETENTION REQUIREMENTS FOR CONTRACTS INVOLVING FEDERAL FUNDS

When federal funds are expended by Beaumont ISD for any contract resulting from this procurement process, Vendor certifies that it will comply with the record retention requirements detailed in 2 CFR § 200.333. Vendor further certifies that it will retain all records as required by 2 CFR
§ 200.333 for a period of three years after grantees or subgrantees submit final expenditure reports or quarterly or annual financial reports, as applicable, and all other pending matters are closed.

_____Initials of Authorized Representative of Vendor

III. CERTIFICATION OF COMPLIANCE WITH THE ENERGY POLICY AND CONSERVATION ACT

When Beaumont ISD expends federal funds for any contract resulting from this procurement process, Vendor certifies that it will comply with the mandatory standards and policies relating to energy efficiency which are contained in the state energy conservation plan issued in compliance with the Energy Policy and Conservation Act (42 U.S.C. 6321 et seq.; 49 C.F.R. Part 18).

_____Initials of Authorized Representative of Vendor

IV. CERTIFICATION OF EQUAL EMPLOYMENT STATEMENT

It is the policy of Beaumont ISD not to discriminate on the basis of race, color, national origin, gender, limited English proficiency or handicapping conditions in its programs. Vendor agrees not to discriminate against any employee or applicant for employment to be employed in the performance of this Contract, with respect to hire, tenure, terms, conditions and privileges of employment, or a matter directly or indirectly related to employment, because of age (except where based on a bona fide occupational qualification), sex (except where based on a bona fide occupational qualification) or race, color, religion, national origin, or ancestry. Vendor further agrees that every subcontract entered into for the performance of this Contract shall contain a provision requiring non-discrimination in employment herein specified, binding upon each subcontractor. Breach of this covenant may be regarded as a material breach of the Contract.

_____Initials of Authorized Representative of Vendor

V. **CERTIFICATION OF COMPLIANCE WITH BUY AMERICA PROVISIONS**

Beaumont ISD has a preference for domestic end products for supplies acquired for use in the United States when spending federal funds (purchases that are made with non-federal funds or grants are excluded from the Buy America Act). Vendor certifies that it is in compliance with all applicable provisions of the Buy America Act.

_____Initials of Authorized Representative of Vendor

VI. CERTIFICATION OF ACCESS TO RECORDS – 2 C.F.R. § 200.336

Vendor agrees that the District's Inspector General or any of their duly authorized representatives shall have access to any books, documents, papers and records of Vendor that are directly pertinent to Vendor's discharge of its obligations under the Contract for the purpose of making audits, examinations, excerpts, and transcriptions. The right also includes timely and reasonable access to Vendor's personnel for the purpose of interview and discussion relating to such documents.

_____Initials of Authorized Representative of Vendor

VII. CERTIFICATION OF APPLICABILITY TO SUBCONTRACTORS

Vendor agrees that all contracts it awards to any subcontractors pursuant to the Contract with Beaumont ISD shall be bound by the foregoing terms and conditions.

_____Initials of Authorized Representative of Vendor

VIII. CERTIFICATION OF APPLICABILITY TO SUBCONTRACTORS

Vendor agrees that it does not boycott energy companies and will not boycott energy companies during the term of the contract, required by Senate Bill 13.

_____Initials of Authorized Representative of Vendor

BY SIGNING BELOW, THE VENDOR AGREES TO COMPLY WITH ALL APPLICABLE FEDERAL, STATE, AND LOCAL LAWS, RULES, REGULATIONS, AND ORDINANCES. IT IS FURTHER ACKNOWLEDGED THAT VENDOR CERTIFIES COMPLIANCE WITH ALL PROVISIONS, LAWS, ACTS, REGULATIONS, ETC. AS SPECIFICALLY NOTED ABOVE.

Vendor's Business Name: _____

Address, City, State, and Zip Code (Principal place of business): _____

_____

Printed Name of Authorized Representative: _____

Title of Authorized Representative: _____

Phone Number: _____ **Email Address:** _____

Signature of Authorized Representative: _____

Date: _____

Form Checklist

Form	Completed
Notice of No Response	
Certifications	
W-9	
Conflict of Interest	
Vendor Compliance to State Law	
Certificate of Interested Parties Agreement	
Non-Collusive Bidding Agreement	
Resident/Non-resident Certification	
Felony Conviction Notification	
Addenda Acknowledgement	
Renewal of Contract	
Bid Validity Agreement	
Debarment Statement	
HB 89 & SB 252 Certifications	
Simplified Acquisition Threshold Agreement	
Termination Agreement	
Rights to Inventions Agreement	
Clean Air Act and Federal Water Pollution Control Act	
Byrd Anti-Lobbying Amendment	
Solid Waste Disposal Act	
Records Retention	
Energy Policy and Conservation Act	
Equal Employment Statement	
Buy America Act Provision	
Certificate of Access to Records	
Senate Bill 13 Acknowledgment	
References	

REFERENCES

VENDOR REFERENCES

The Proposer is to submit three (3) references that have contracted with their company to provide like products and/or services. It is recommended that the Proposer show school districts or other local government organizations equal to BISD in size and structure, if possible. To expedite the evaluation process, e-mail is the preferred method of contact. Note: Failure to supply complete reference information may be grounds for proposal disqualification.

1	***Company Name***		**Contact**	
	Business Address		**Phone #**	
	Email Address		**Fax #**	

2	***Company Name***		**Contact**	
	Business Address		**Phone #**	
	Email Address		**Fax #**	

3	***Company Name***		**Contact**	
	Business Address		**Phone #**	
	Email Address		**Fax #**	

EXHIBIT A

COMPANY HISTORY, EXPERIENCE, AND QUALIFICATIONS

1. Please provide a description and brief history/background of your company. Included in this should be the number of years in business; list of owners; board of directors, if applicable; key company personnel; number of total employees (both company wide and those working out of the office, warehouse, or depot from where services for this contract will originate).

EXHIBIT B

SCOPE OF WORK BY CAMPUS

Amelia Elementary School
Beaumont United Field House
Bingman Head Start
Fletcher Elementary School
Jones Clark Elementary School
Marshall Middle School
Paul Brown Learning Center
Smith Middle School
South Park Middle School
West Brook Sr. High School



05/16/2022

Project Manual
For
CSP 22.26

HVAC UPGRADES PART TWO

BEAUMONT INDEPENDENT SCHOOL DISTRICT

Issue Date: May 16, 2022

Salas O'Brien, LLC Project No.: 2429-2022-01678

Salas O'Brien, LLC

TABLE OF CONTENTS

HVAC UPGRADES PART TWO
Beaumont Independent School District
Salas O'Brien Project No. 2429-2022-01678



05/16/2022

I. PROPOSAL DOCUMENTS

BISD CSP 22.26 – Competitive Sealed Proposals

00 01 16 Request for Competitive Sealed Proposals 3
00 21 14 Proposal Form 4
00 43 13 Proposal Security Form 2
00 45 17 Proposed Subcontractor Form 1
00 45 18 Contractor's Proposed Project Personnel & Safety Record 1
00 61 13 Performance Bond 2
00 61 14 Payment Bond 2
00 61 23 Contract Documents 1
00 61 25 Insurance Certificates and Bonds 3
00 61 27 General Conditions of the Construction Contract 1
00 73 00 Supplementary Conditions to the General Conditions of the Contract for Construction 23
00 73 46 Prevailing Wage Rate Determination Information 4

II. SPECIFICATIONS

DIVISION 1 - GENERAL REQUIREMENTS

Section

01 10 00 Summary of Work 2
01 21 00 Allowances 2
01 23 00 Alternates 2
01 29 00 Payment Procedures 3
01 29 73 Schedule of Values 2
01 31 00 Project Management and Coordination 2
01 31 19 Project Meetings 3
01 31 20 Preconstruction Meetings 1
01 32 16 Construction Progress Schedules 2
01 33 00 Submittal Procedures 6
01 33 23 Shop Drawings, Product Data and Samples 4
01 35 23 Contractor Site Rules 2
01 36 13 Cutting and Patching 5
01 36 16 Remodel Alteration Procedures 3
01 50 00 Temporary Facilities and Controls 4
01 74 00 Construction Cleaning 3
01 77 00 Closeout Procedures 8

DIVISION 2 – 22 - NOT USED

DIVISION 23 - MECHANICAL

Section

23 01 00 HVAC Operating and Maintenance Manuals 3
23 05 00 Mechanical General Provisions 6
23 05 10 HVAC Contract Quality Control 4
23 05 11 Mechanical Alterations Project Procedures 4
23 05 12 Shop Drawings, Coordination Drawings & Product Data 5

23 05 13 Electrical Provisions of HVAC Work 3
23 05 14 HVAC Condensate Drain Piping System 1
23 05 18 Variable Frequency Inverter 5
23 05 19 HVAC Pressure and Temperature Instruments 3
23 05 23 HVAC Valves, Strainers, and Vents 5
23 05 33 HVAC Pipe Heat Tracing 2
23 05 48 Vibration Isolation 3
23 05 93 Testing, Balancing and Adjusting (TAB) of Environmental Systems 12
23 05 94 Coordination of Testing and Balancing 3
23 07 16 Vessel Insulation 3
23 07 19 HVAC Piping Insulation 7
23 09 33 Building Management and Control System 21
23 20 00 Mechanical Pipe and Fittings – General 7
23 21 13 Hot Water and Chilled Water Piping, Valves and Appurtenances 2
23 21 23 HVAC Pumps 5
23 25 13 Circulating Water System Chemical Treatment 5
23 65 27 Air Cooled Rotary Scroll Chiller 8
23 65 28 Air Cooled Variable Speed Rotary Screw Chiller 8

DIVISION 26 - ELECTRICAL

Section

26 01 05 Electrical Operating and Maintenance Manuals 4
26 05 00 Electrical General Procedures 15
26 05 05 Electrical Alterations Project Procedures 6
26 05 10 Contract Quality Control 2
26 05 12 Electrical Shop Drawings, Coordination Drawings and Product Data 5
26 05 19 Conductors and Connectors – 600 Volt 6
26 05 27 Expansion of Existing Electrical Grounding System 4
26 05 33 Conduit Systems 14
26 05 35 Electrical Connections for Equipment 2
26 05 37 Electrical Boxes and Fittings 5
26 05 40 Electrical Gutters and Wireways 2
26 05 50 Firestops 1
26 09 22 Modifications of Existing Motor Control Centers 4
26 24 14 Testing, Maintenance, and Modifications to Existing Switchboards 3
26 24 25 Enclosed Switches 4
26 27 73 Line Voltage Wiring Devices 6

BEAUMONT ISD – HVAC UPDATES PART 2
SALAS O'BRIEN JOB #: 2022-01678-00

SHEET # SHEET NAME/TITLE

GENERAL SHEETS
CS-1 COVER SHEET – LIST OF DRAWINGS
CS-2 COVER SHEET - SITES

AMELIA ELEMENTARY SCHOOL
M0.1 MECHANICAL DEMOLITION FLOOR PLAN - AMELIA ES
M1.1 MECHANICAL FLOOR PLAN - AMELIA ES
M2.1 MECHANICAL DETAILS AND SCHEDULES - AMELIA ES
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - AMELIA ES
E1.1 ELECTRICAL FLOOR PLAN - AMELIA ES

BEAUMONT UNITED FIELD HOUSE
M0.1 MECHANICAL DEMOLITION FLOOR PLAN – BEAUMONT UNITED FH
M1.1 MECHANICAL FLOOR PLAN - BEAUMONT UNITED FH
M2.1 MECHANICAL DETAILS AND SCHEDULES - BEAUMONT UNITED FH
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - BEAUMONT UNITED FH
E1.1 ELECTRICAL FLOOR PLAN - BEAUMONT UNITED FH

BINGMAN HEAD START
M0.1 MECHANICAL DEMOLITION FLOOR PLAN – BINGMAN HEAD START
M1.1 MECHANICAL FLOOR PLAN - BINGMAN HEAD START
M2.1 MECHANICAL DETAILS AND SCHEDULES - BINGMAN HEAD START
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - BINGMAN HEAD START
E1.1 ELECTRICAL FLOOR PLAN - BINGMAN HEAD START

FLETCHER ELEMENTARY SCHOOL
M0.1 MECHANICAL DEMOLITION FLOOR PLAN – FLETCHER ES
M1.1 MECHANICAL FLOOR PLAN - FLETCHER ES
M2.1 MECHANICAL DETAILS AND SCHEDULES - FLETCHER ES
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - FLETCHER ES
E1.1 ELECTRICAL FLOOR PLAN - FLETCHER ES

JONES CLARK ELEMENTARY SCHOOL
M0.1 MECHANICAL DEMOLITION FLOOR PLAN – JONES CLARK ES
M1.1 MECHANICAL FLOOR PLAN - JONES CLARK ES
M2.1 MECHANICAL DETAILS AND SCHEDULES - JONES CLARK ES
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - JONES CLARK ES
E1.1 ELECTRICAL FLOOR PLAN - JONES CLARK ES

MARSHALL MIDDLE SCHOOL
M0.1 MECHANICAL DEMOLITION FLOOR PLAN – MARSHALL MS
M1.1 MECHANICAL FLOOR PLAN - MARSHALL MS
M2.1 MECHANICAL DETAILS AND SCHEDULES - MARSHALL MS
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - MARSHALL MS
E1.1 ELECTRICAL FLOOR PLAN - MARSHALL MS

PAUL BROWN LEARNING CENTER
M0.1 MECHANICAL DEMOLITION FLOOR PLAN – PAUL BROWN LC
M1.1 MECHANICAL FLOOR PLAN - PAUL BROWN LC
M2.1 MECHANICAL DETAILS AND SCHEDULES - PAUL BROWN LC
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - PAUL BROWN LC
E1.1 ELECTRICAL FLOOR PLAN - PAUL BROWN LC

SMITH MIDDLE SCHOOL
M0.1 MECHANICAL DEMOLITION FLOOR PLAN – SMITH MS
M1.1 MECHANICAL FLOOR PLAN - SMITH MS
M2.1 MECHANICAL DETAILS AND SCHEDULES - SMITH MS
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - SMITH MS
E1.1 ELECTRICAL FLOOR PLAN - SMITH MS

SOUTH PARK MIDDLE SCHOOL
M0.1 MECHANICAL DEMOLITION FLOOR PLAN – SOUTH PARK MS
M1.1 MECHANICAL FLOOR PLAN - SOUTH PARK MS
M2.1 MECHANICAL DETAILS AND SCHEDULES - SOUTH PARK MS
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - SOUTH PARK MS
E1.1 ELECTRICAL FLOOR PLAN - SOUTH PARK MS

WESTBROOK HIGH SCHOOL
M0.1 MECHANICAL DEMOLITION FLOOR PLAN – WESTBROOK HS
M1.1 MECHANICAL FLOOR PLAN - WESTBROOK HS
M2.1 MECHANICAL DETAILS AND SCHEDULES - WESTBROOK HS
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - WESTBROOK HS
E1.1 ELECTRICAL FLOOR PLAN - WESTBROOK HS

SECTION 00 01 16

REQUEST FOR COMPETITIVE SEALED PROPOSALS

Competitive Sealed Proposals for the work identified below in accordance with Proposal Documents thereof and such addenda thereto as may be issued prior to date of proposal opening will be received by the Board of Trustees, Beaumont Independent School District, until proposal closing date and time, as identified below. Proposals from Contractors will then be opened in public and read aloud.

OWNER: Beaumont Independent School District

PROJECT: CSP 22.26 HVAC Upgrades Part Two

PROPOSAL DATE AND TIME: **Thursday, June 2, 2022 @ 2:00 PM,** Receipt of Competitive Sealed Proposals

LOCATION AND PROPOSAL OPENING:
Beaumont Independent School District
Beaumont ISD Administration
3395 Harrison Avenue
Beaumont, TX 77706

MAIL OR DELIVER TO:
Beaumont Independent School District
Purchasing Department
3395 Harrison Avenue
Beaumont, Texas 77706

ENGINEER:
Salas O'Brien, LLC
10930 W. Sam Houston Parkway N, Suite 900
Houston, Texas 77064
(281) 664-1900

PRE-PROPOSAL CONFERENCE
Tuesday, May 24, 2022 @ 10:00 AM
Amelia Elementary School
555 Major Drive
Beaumont, TX 77707

General Contractors only may obtain plans and specifications at place identified below.

Proposal Documents will be available electronically beginning Monday, May 16, 2022, and may be obtained from the following:

Salas O'Brien, LLC
10930 W. Sam Houston Parkway N, Suite 900
Houston, Texas 77064
(281) 664-1900
Attention: Sharon Slauta (sharon.slauta@salasobrien.com)

Office Hours are: 7:00 AM to 5:00 PM Monday through Thursday
8:00 AM to 12:00 Noon Friday

In addition, proposal documents can be reviewed at the following locations:

Virtual Builders
jmiller@virtualbx.com

I SQ FT Plan Room
www.isqft.com

Reed Construction Data (RCD)	McGraw-Hill Construction Dodge (on-line services)
www.reedconstructiondata.com	www.dodgeplans.construction.com

All proposals must be in the hands of the Owner no later than the time specified above. Please seal all proposals in duplicate in an envelope with the following information on the face of the envelope.

REQUIRED TO BE SUBMITTED BEFORE 2:00 PM
Competitive Sealed Base Proposal for CSP 22.26 HVAC Upgrades Part Two
Do Not Open Until Thursday, June 2, 2022 at 2:00 PM

The Owner reserves the right to reject any and all proposals and to waive any informality in proposals.

No proposal shall be withdrawn within 30 days after the proposal opening without the specific consent of the Owner.

PROPOSAL BOND: A Bidder's Bond from a bonding company acceptable to the Owner, or a cashier's check, or a certified check, in an amount equal to or greater than 10% of the greatest amount proposed must accompany each proposer's proposal.

PAYMENT BOND AND PERFORMANCE BOND: A Payment Bond and Performance Bond, each in an amount equal to or greater than 100% of the Contract Sum conditioned upon the faithful performance of the Contract will be required. Please note that all bonding companies presented must be acceptable to the Owner.

QUALIFICATION STATEMENTS: Proposers are required to comply with certain procedures as enumerated in the Instructions to Proposers and those outlined below.

Competitive Sealed Proposals will be accepted from qualified Proposers only, for the entire scope of work described in the Proposal Documents. As a prerequisite to qualifying for the award of contract for this Work, each Proposer must complete all items of the Contractor Information and Experience Statement (AIA Document A305). The document may be obtained from the Houston Chapter of the American Institute of Architects, 902 Commerce St., Houston, TX 77002, (713) 520-0155.

In addition to information required in Document A305, Proposers shall also address the selection criteria issues listed within the Instruction to proposers' document. Completed Document A305, proposed project team with resumes for all project staff, and other requested information must be submitted prior to the receipt of Proposals. The A305 and all corresponding documentation shall be combined into a single PDF document and either emailed or transmitted electronically via a file share service including explicit instructions of how to gain access to documents. Contractor shall confirm receipt of A305 and all corresponding documentation with the Owner prior to the stated due date and time. References provided shall include name and current email address.

The above-described information shall be submitted to the Engineer by Friday, May 27, 2022 @ 3:00 PM.
Attention: Sharon Slauta (sharon.slauta@salasobrien.com)

The prevailing rates of wages are the minimums that must be paid in conformance with all applicable laws of the State of Texas.

All General Contractors submitting a proposal are encouraged to attend the proposal opening.

Subcontractors and Suppliers intending to submit proposals to General Construction Proposers are required to prepare their proposal/bids based on a complete set of documents. If after reviewing the complete set of documents, Subcontractors and Supplier Proposers desire to purchase individual drawings and specification sections for their convenience, they may do so by ordering the specific drawings and specifications directly from the reproduction company. Each proposer purchasing a partial set of documents is responsible for determining exactly which documents he requires and is responsible for all costs associated with printing and delivery. Subcontractors and Suppliers

exercising this option must agree to do so on the basis that 1) all documents shall be returned to the Engineer, without refund, after receipt of proposals and 2) documents shall not be used on other construction projects. Successful Subcontractors and Supplier Proposers may retain their Documents until completion of the construction.

All General Contractors submitting a proposal are encouraged to visit the site.

END OF SECTION

SECTION 00 21 14

PROPOSAL FORM

CSP 22.26 HVAC UPGRADES PART TWO
BEAUMONT INDEPENDENT SCHOOL DISTRICT

Submitted by: _____

Date: _____ Phone No.: _____

To: Beaumont Independent School District
Purchasing Department
3395 Harrison Avenue
Beaumont, Texas 77706

Having examined Proposal and Contract Documents prepared by Salas O'Brien, LLC, dated May 16, 2022, and having examined site conditions, the undersigned proposes to furnish all labor, equipment and materials and perform all work for the completion of the above-named project for the sum indicated below.

In submitting his Proposal, the undersigned agrees to the following:

1 Hold base proposal open for acceptance 60 days.
2 Hold alternate proposals open for acceptance 60 days.
3 Accept right of Owner to reject any or all proposals, to waive formalities and to accept proposal that Owner considers most advantageous.
4 Enter into and execute the contract, if awarded, for the Base Proposal and accepted Alternate Proposals.
5 Complete work in accordance with the Contract Documents within the stipulated contract time.

I. BASE PROPOSAL

Undersigned agrees to complete the work for the lump sum amount of:

_____
(Amount written in words governs)

Dollars $_____
(Amount in figures)

The Base Proposal is to include a $200,000.00 Owner's Contingency Allowance as shown in Specification Section 01 21 00.

THIS FORM MUST BE SUBM1TTED IN DUPLICATE BY 2:00 PM, TUESDAY JUNE 2, 2022.

II. ALTERNATES

<u>Alternate No. 1A:</u> This alternate shall establish the amount to be added to the base proposal for the contractor to furnish and install Air Cooled Chillers as manufactured by <u>Carrier</u> and as shown on the drawings and listed in the specifications. There are no Air-Cooled Chillers provided under the Base Proposal.

Undersigned agrees to complete the work for the lump sum amount of:

_____
(Amount written in words governs)

Dollars $_____
(Amount in figures)

Current Lead Time (including shipping) – Screw Chillers (Weeks) _____

Current Lead Time (including shipping) – Scroll Chillers (Weeks) _____

<u>Alternate No. 1B:</u> This alternate shall establish the amount to be added to the base proposal for the contractor to furnish Manufacturer Extended Parts, Labor and Refrigerant Warranty for years 6-10 for the <u>Carrier</u> Chillers.

Undersigned agrees to complete the work for the lump sum amount of:

_____
(Amount written in words governs)

Dollars $_____
(Amount in figures)

<u>Alternate No. 2A:</u> This alternate shall establish the amount to be added to the base proposal for the contractor to furnish and install Air Cooled Chillers as manufactured by <u>Daikin</u> and as shown on the drawings and listed in the specifications. There are no Air-Cooled Chillers provided under the Base Proposal.
Undersigned agrees to complete the work for the lump sum amount of:

_____
(Amount written in words governs)

Dollars $_____
(Amount in figures)

Current Lead Time (including shipping) – Screw Chillers (Weeks) _____

Current Lead Time (including shipping) – Scroll Chillers (Weeks) _____

<u>Alternate No. 2B:</u> This alternate shall establish the amount to be added to the base proposal for the contractor to furnish Manufacturer Extended Parts, Labor and Refrigerant Warranty for years 6-10 for the <u>Daikin</u> Chillers.

Undersigned agrees to complete the work for the lump sum amount of:

_____
(Amount written in words governs)

Dollars $_____
(Amount in figures)

<u>Alternate No. 3A:</u> This alternate shall establish the amount to be added to the base proposal for the contractor to furnish and install Air Cooled Chillers as manufactured by <u>Trane</u> and as shown on the drawings and listed in the specifications. There are no Air-Cooled Chillers provided under the Base Proposal.

Undersigned agrees to complete the work for the lump sum amount of:

_____
(Amount written in words governs)

Dollars $_____
(Amount in figures)

Current Lead Time (including shipping) – Screw Chillers (Weeks) _____

Current Lead Time (including shipping) – Scroll Chillers (Weeks) _____

<u>Alternate No. 3B:</u> This alternate shall establish the amount to be added to the base proposal for the contractor to furnish Manufacturer Extended Parts, Labor and Refrigerant Warranty for years 6-10 for the <u>Trane</u> Chillers.

Undersigned agrees to complete the work for the lump sum amount of:

_____
(Amount written in words governs)

Dollars $_____
(Amount in figures)

III. ADDENDA: The undersigned acknowledges receipt of Addenda Numbers

Rec'd	Add. No.	Date
_____	01	
_____	02	
_____	03	
_____	04	

IV. CHANGES IN THE WORK

The undersigned understands that changes in the work shall be performed in accordance with the Supplementary Conditions.

V. LIQUIDATED DAMAGES

The undersigned understands that liquidated damages as defined in the Supplementary Conditions will be included in the form of Agreement Between Owner and Contractor and that the contractor will be bound thereto.

It is understood that the right is reserved by the Owner to reject any or all proposals or waive any informalities in Receipt of Proposals.

The undersigned certifies that the amounts contained in this Competitive Sealed Proposal have been carefully checked and are submitted as correct and final.

Type of Proposer's Organization:

_____
(Corporation, Co-Partnership, Individual, etc.)

Proposer: _____
(Print or Type)

_____
(Signature of Proposer)

Title of Office: _____
(Print or Type)

Legal Address: _____
(Print or Type)

_____

Zip Code: _____ Tel.: (___)_____-_____
(Print or Type)

ATTEST:

_____
(Secretary, if Proposer is a Corporation) SEAL:
(If Corporation)

COMPETITIVE SEALED PROPOSAL MUST BE MADE IN DUPLICATE

NOTE: In order to receive consideration, the following documents must be submitted with the Proposal:

01 Section 00 21 14 – Proposal Form
02 Section 00 43 13 – Proposal Security Form

NOTE: In order to receive full consideration, the following documents must be submitted not later than twenty-four (24) hours after receipt of Base Proposals.

01 Section 00 45 17 – Proposed Subcontractor Form
02 Section 00 45 18 – Proposed Personnel and Safety Record

END OF SECTION

DOCUMENT 00 43 13

PROPOSAL SECURITY FORM

KNOW ALL MEN BY THESE PRESENTS, that we _____, as

Principal, and _____, as Surety, are held and firmly bound unto the Beaumont Independent School District, Jefferson County, hereinafter called the Owner, in the penal sum of

_____ Dollars ($_____)

lawful money of the United States, for the payment of which sum well and truly to be made, we bind ourselves, our heirs, executors, administrators and successors jointly and severally, firmly by these presents.

THE CONDITION OF THIS OBLIGATION IS SUCH, that whereas the Principal has submitted the accompanying

Proposal, dated June 2, 2022, being for **CSP 22.26 HVAC Upgrades Part Two**, for the Beaumont Independent School District, the kind and extent of work involved being set forth in detail in the proposed Contract Documents cited herein.

NOW, THEREFORE, if the Principal shall not withdraw the accompanying proposal within thirty (30) days after the date set for opening thereof, and shall within ten (10) days after the prescribed forms are presented to him for signature, enter into a written contract with the Owner in accordance with the Proposal as accepted; and give Bond and good and sufficient surety for the faithful performance and proper fulfillment of such contract including payment of all persons supplying labor or materials therefor, or in the event of the withdrawal of said proposal within the period specified, or the failure to enter into such contract and give such bond within the time specified, if the Principal shall pay to the Owner the difference between the aggregate amount for which the Owner may enter into a contract for the same work with another Proposer; if the latter amount be in excess of the former, then the above obligation shall be void and of no effect, otherwise to remain in full force and virtue.

IN WITNESS WHEREOF, the above bonded parties have executed this instrument under their several seals this _____ day of _____, *2022*, the name and Corporate Seal of each corporate party being hereto affixed and these presents duly signed by its undersigned representatives, pursuant to authority of its governing body.

_____ _____

Business Address Individual Principal

_____ _____

Business Address Individual Principal

ATTEST:

_____ BY:_____

Secretary President

_____ _____

Business Address Corporate Surety

ATTEST:_____ BY:_____

NOTE: THIS FORM MUST BE EXECUTED AND SUBMITTED WITH PROPOSAL.

END OF SECTION

SECTION 00 45 17

PROPOSED SUBCONTRACTOR FORM

NOTE: THIS FORM MUST BE SUBMITTED WITHIN 24 HOURS OF RECEIPT OF PROPOSAL.

GENERAL CONTRACTOR: _____

01 GENERAL

A. One of the evaluation criteria used to select the successful General Contractor is the sub-contractors proposed to be used for the Work. In order to receive consideration for the award of the Contract, each Proposer must submit a list of sub-contractors proposed be used for the Work.

B. Recognizing the Proposer may not have firm contractual agreements with sub-contractors immediately following submission of Proposals, an allowance is made to submit two (2) sub-contractors for each trade listed below.

02 PROPOSED SUB-CONTRACTORS

List sub-contractors in the order with which there is the best likelihood of using for the Work stipulated.

Trade	Sub-Contractor 1	Sub-Contractor 2
Mechanical	_____	_____
Electrical	_____	_____

NOTE: THIS FORM MUST BE SUBMITTED WITHIN 24 HOURS OF RECEIPT OF PROPOSAL.

END OF SECTION

SECTION 00 45 18

CONTRACTOR'S PROPOSED PROJECT PERSONNEL & SAFETY RECORD

PART 1 - GENERAL

A. An item of the evaluation criteria used to select the successful general contractor to perform this work is the qualifications of the Contractor's proposed project personnel to be assigned to this project.

B. Please submit the names of the personnel in the spaces provided below and submit as an attachment a resume and other supportive information of those persons listed.

01 Principal in Charge:

_____

02 Project Manager:

_____

03 Assistant Project Manager (as applicable):

_____

04 Construction Superintendent:

_____

05 Assistant Superintendent (as applicable):

_____

C. Contractors Safety Record: Submit the following Safety related information:

01 Current Workmen's Compensation Modifier

02 Number of lost time incidents during the past five years and the associated number of lost days. Include the number of Occupational Safety and Health Administration citations received during the past five years.

NOTE: THIS FORM MUST BE EXECUTED AND SUBMITTED WITHIN 24 HOURS OF BASE PROPOSAL.

END OF SECTION

DOCUMENT 00 61 13

PERFORMANCE BOND FORM

KNOW ALL MEN BY THESE PRESENT

STATE OF TEXAS

COUNTY OF JEFFERSON

THAT WE, _____, a Corporation of the State of Texas, with home office and principal place of business in _____, Texas, hereinafter called "Principal" and _____ a Corporation of the State of _____, hereinafter called "Surety" are held and firmly bond unto the Beaumont Independent School District, hereinafter called "Owner", in the amount of _____ ($_____) Dollars for payment whereof the said principal and surety bind themselves and their heirs, administrators, executors, successors and assigns, jointly and severally, firmly by these presents.

The condition of this obligation is such that whereas the Principal has entered into a certain contract with the Beaumont Independent School District, the Owner, dated the _____ day of _____, 2022, for the complete construction on the property of the Owner, located in Jefferson County, Texas, of the Work described as:

CSP 22.26 HVAC UPGRADES PART TWO
for
BEAUMONT INDEPENDENT SCHOOL DISTRICT

which said Contract and Documents referred to therein is herein now referred to and made a part hereof as fully and completely as if copies in detail herein.

NOW, THEREFORE, the condition of this obligation is such that if said Principal shall well and truly and faithfully perform all the undertakings, covenants, terms, conditions, and agreements of said Contract, including, but not limited to, the faithful performance of the Work required in accordance with the plans and specifications, during the original term thereof and extension thereof which may be granted by the Owner with or without notice to the Surety, and if said Principal shall satisfy all claims and demands incurred under such Contract and shall fully indemnify and save harmless the Owner from all costs, damages and reasonable expenses which it may suffer by reason of failure so to do and shall fully reimburse and repay the Owner all outlay and expenses, including attorney's fees, which the Owner may incur in making good any default, and shall reimburse and repay the Owner for all costs, including attorney's fees, which the Owner may incur in the prosecution or defense of any suit or proceeding arising out of the breach or default of the Principal, then this obligation shall be void; otherwise, to remain in full force and effect.

The said Surety, for value received, hereby stipulates and agrees that no change, extension of time, alterations or additions to the terms of the Contract or to the Work to be performed thereunder or of the specifications accompanying the same, shall in anyway affect its obligation on this bond, and it does hereby waive notice of such change, extensions of time, alterations or additions to the terms of the Contract or to the Work or to the specifications thereunder.

It is expressly provided that if any legal action shall be filed upon this bond, venue shall lie in Harris County, Texas.

Simultaneously with the execution of this Performance Bond, the parties hereto have executed a Payment Bond, reference to which is made for all purposes. Nothing in this Performance Bond shall in any way invalidate or nullify the obligations of the parties as set forth in said Payment Bond.

Provided, however, that this bond is executed pursuant to the provisions of Article 5160 of the revised Civil Statutes of Texas, as amended by Acts of the 61st Legislature, 1969, and liabilities on this bond shall be determined in accordance with the provisions of said Article to the same extent as if it were copies at length herein.

Provided, however, that nothing in the bond shall be construed to limit the rights of the beneficiaries of this Bond which they might have under general, special or the common law of the State of Texas not inconsistent with the terms hereof and not inconsistent with the provisions of Article 5160, as amended.

IN TESTIMONY WHEREOF, the parties hereto have executed this instrument on this _____ day

of _____, 2022

_____
(Authorized Signature of Principal)

_____
(Title)

APPROVED AS TO FORM: **ATTEST:**

_____ _____
Owner: Beaumont Independent School District (Secretary of Principal's Corporation)

_____ _____
Attorney Representing Owner (Authorized Signature of Surety)

_____
(Title)

END OF SECTION

DOCUMENT 00 61 14

PAYMENT BOND FORM

KNOW ALL MEN BY THESE PRESENT

STATE OF TEXAS

COUNTY OF JEFFERSON

THAT WE, _____, a Corporation of the

State of Texas, with home office and principal place of business in _____, Texas,

hereinafter called "Principal" and _____ a Corporation of the

State of _____, hereinafter called "Surety" are held and firmly bond unto the Beaumont Independent School District, hereinafter called "Owner", for the use and benefit of all persons, firms and corporations who may furnish material or perform labor upon the buildings or improvements hereinafter referred to, in the penal sum of

_____ ($_____) Dollars, (the Contract Price), in lawful

money of the United States of America, to be paid in _____, Texas for payment of which sum well and truly to be made we bind ourselves and our successors, jointly and severally, by these presents.

CSP 22.26 HVAC UPGRADES PART TWO
for
BEAUMONT INDEPENDENT SCHOOL DISTRICT

which said Contract and Documents referred to therein is herein now referred to and made a part hereof as fully and completely as if copies in detail herein.

NOW, THEREFORE, the condition of this obligation is such that if the Principal shall promptly make payment to all persons, firms and corporations furnishing materials for, or performing labor in the prosecution of the Work provided for in such Contract, and any extension or modification thereof, then this obligation shall be void; otherwise to remain in full force and effect.

Provided, however, that this bond is executed pursuant to the provisions of Article 5160 of the revised Civil Statutes of Texas, as amended by Acts of the 61st Legislature, 1969, and liabilities on this bond shall be determined in accordance with the provisions of said Article to the same extent as if it were copies at length herein.

Provided, however, that nothing in the bond shall be construed to limit the rights of the beneficiaries of this Bond which they might have under general, special or the common law of the State of Texas not inconsistent with the terms hereof and not inconsistent with the provisions of Article 5160, as amended.

Said Surety, for value received, hereby stipulates and agrees that no change, extension of time, alterations or additions to the terms of the Contract or to the Work to be performed thereunder, or of the specifications accompanying the same, shall in anyway affect its obligation on this bond, and it does hereby waive notice of such change, extension of time, alteration or addition to the terms of the Contract or to the Work or to the specifications thereunder.

No final settlement between the Owner and the Contractor shall abridge the right of any beneficiary hereunder whose claim may be unsatisfied, and it is expressly provided that if any legal action shall be filed upon this bond, venue shall lie in Harris County, Texas.

Simultaneously with the execution of this Payment Bond, the parties hereto have executed a Performance Bond, reference to which is made for all purposes. Nothing in this Payment Bond shall in any way invalidate or nullify the obligations of the parties as set forth in said Performance Bond.

IN TESTIMONY WHEREOF, the parties hereto have executed this instrument on this _____ day of _____, 2022

_____
(Authorized Signature of Principal)

_____
(Title)

APPROVED AS TO FORM:
ATTEST:

_____ _____
Owner: Beaumont Independent School District (Secretary of Principal's Corporation)

_____ _____
Attorney Representing Owner (Authorized Signature of Surety)

_____
(Title)

END OF SECTION

SECTION 00 61 23

CONTRACT DOCUMENTS

I. CONSTRUCTION CONTRACT AGREEMENT

A. The contract for the construction of the project shall be executed by the successful bidder on the 2017 Edition of AIA Document A101 "Standard Form of Agreement between Owner and Contractor." Said contract, fully executed, shall be delivered to the Owner within ten (10) days of receipt of "Notice of Acceptance."

II. CONDITIONS OF THE CONTRACT

A. The General Conditions of the Contract for Construction, AIA Document A201-2017 Edition, is hereby specifically made a part of the Contract Documents, whether attached hereto or not; and as supplemented and amended herein, constitutes the General Conditions.

B. Supplementary Conditions:

01 The Supplementary Conditions contain modifications to the General Conditions of the Contract for Construction, AIA Document A201. Where any part of that document is modified by Supplementary Conditions, the unaltered provisions of the General Conditions shall remain in effect. Refer to Section CB for the Supplementary Conditions.

III. AVAILABILITY

A. Printed copies of these documents may be examined in the Engineer's office. AIA Documents may be obtained from the Houston Chapter of the American Institute of Architects, 3000 Richmond, Suite 500, Houston, Texas 77098; (713) 520-0155. Copies may also be obtained from local architects' supplies stores.

B. Failure to obtain and examine these documents in no way relieves the Contractor, Subcontractors, Sub-subcontractors, and material suppliers of responsibilities incorporated in the Agreement.

IV. CONTRACT DOCUMENT ORGANIZATION

A. The Contract Documents are segregated into Drawings and Specifications.

B. The Drawings, although organized by discipline, are to be treated as an aggregate set describing the work required. Drawings within each discipline relate to all other Drawings outside the discipline and proposals / sub-bids and be based on the aggregate set of Drawings and all work described.

C. The Project Manual / Specifications are organized according to CSI format.

D. The Specifications, although organized by discipline / CSI section, are to be treated as an aggregate set describing the work required. Specifications within each discipline / CSI section relates to all other Specifications outside the discipline / CSI section and proposals / sub-bids and are based on the aggregate set of Specifications and all work described.

END OF SECTION

SECTION 00 61 25

INSURANCE CERTIFICATES AND BONDS

1.0 GENERAL

A. This Section shall govern the entire Contract.

B. No Work will be commenced until all requirements of this Section have been approved by the Owner in writing. The Owner will be furnished a certificate of insurance acceptable, prior to the commencement of any Work.

C. The insurance shall contain a provision that at least thirty days prior written notice shall be given to the Owner in the event of cancellation, material change, or non-renewal.

D. Insurance shall be underwritten by a company rated not less than B+ XII in Best's latest published guide.

E. There shall be a hold harmless agreement in which the Contractor assumes liability on the contract and holds Beaumont ISD harmless: (Reference AIA Document A201, Article 3.18 indemnifications.)
3.18 Indemnification
3.18.1 To the fullest extent permitted by law the Contractor shall indemnify and hold harmless the Owner, Engineer, Engineer's consultants, and agents and employees of any of them from and against claims, damages, losses and expenses, including but not limited to attorneys' fees, arising out of or resulting from performance of the Work, provided that such claim, damage, loss or expense is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the Work itself), but only to the extent caused by the negligent acts or omissions of the Contractor, a Subcontractor, anyone directly or indirectly employed by them or anyone for whose acts they may be liable, regardless of whether or not such claim, damage, loss or expense is caused in part by a party indemnified hereunder. Such obligation shall not be construed to negate, abridge, or reduce other rights or obligations of indemnity that would otherwise exist as to a party or person described in this Section 3.18.

3.18.2 In claims against any person or entity indemnified under this Section 3.18 by an employee of the Contractor, a Subcontractor, anyone directly or indirectly employed by them or anyone for whose acts they may be liable, the indemnification obligation under Section 3.18.1 shall not be limited by a limitation on amount or type of damages, compensation or benefits payable by or for the Contractor or a Subcontractor under workers' compensation acts, disability benefit acts or other employee benefit acts.

F. The Contractor shall purchase and maintain in force the following kinds of insurance and bonds for operations under construction contracts and as specified in each section.

G. Before an exposure to loss may occur, the Contractor shall file with the Owner a copy of each policy that includes insurance coverages required by this section. Each policy shall contain all generally applicable conditions, definitions, exclusions and endorsements related to this project. Each policy shall contain a provision that the policy will not be canceled or allowed to expire until at least 30 days' prior written notice has been given to the Owner.

H. The Owner and Contractor waive all rights against (1) each other and any of their Subcontractors, Sub-subcontractors, agents and employees, each of the other, and (2) the Engineer, Engineer's consultants, separate contractors described in Article 6 of General Conditions, if any, and the subcontractors, sub-subcontractors, agents and employees of any of them, by appropriate agreements, written where legally required for validity, similar waivers each in favor of other parties enumerated herein. The policies shall provide such waivers of subrogation by endorsement

or otherwise, did not pay the insurance premium directly or indirectly, and whether or not the person or entity had an insurable interest in the property damaged.

I. A loss insured under Contractor's property insurance shall be adjusted by the Owner as fiduciary and made payable to the Owner as fiduciary for the insureds, as their interests my appear. The Contractor shall pay Subcontractors their just shares of insurance proceeds received by the Contractor, and by appropriate agreements, written where legally required for validity, shall require Subcontractors to make payments to their Sub-subcontractors in similar manner.

J. If required in writing by a party in interest, the Owner as fiduciary shall, upon occurrence of an insured loss, give bond for proper performance of the Owner's duties. The cost of required bonds shall be charged against proceeds received as fiduciary. The Owner shall deposit in a separate account proceeds so received, which the Owner shall distribute in accordance with such agreement as the parties in interest may reach. If after such loss no other special agreement is made, replacement of damaged property shall be covered by appropriate Change Order.

K. Depending on the type of insurance, proof of insurance shall be evidenced on an original Certificate of Insurance – Construction, ACORD Form 25-S, with an original signature of the authorized representative. Policy exclusions and/or restrictions should be clearly explained on the certificate or in an attached letter from the issuing Agency. Blank areas on the certificate should have "not covered" written across the printed areas when coverage is not provided.

L. The Owner as fiduciary shall have power to adjust and settle a loss with insurers.

M. Contractor shall require all of its subcontractors and suppliers of every tier to maintain minimum insurance coverage, both limits and endorsements, as herein required of Contractor.

2.0 CASUALTY INSURANCE

A. Worker's Compensation insurance to statutory limits, and employer's liability insurance to limits of $500,000 shall be kept in full force and effect for the duration of the project by all Contractors and Subcontractors providing services on this construction site. All policies and coverages shall be in full conformance with the latest regulations of the Texas Worker's Compensation Commission and the Texas Labor Code. All persons providing services on this project shall provide a Certificate of Coverage directly to the Owner and Engineer. Furthermore, the Owner reserves the right to continue monitoring the coverages of all workers for the entire duration of this Project.

B. Commercial General Liability Insurance (Occurrence basis only).

Bodily Injury and Property Damage	Each Occurrence	$1,000,000
	General Aggregate	$2,000,000
	(The general aggregate shall apply per location)	
Products/Completed Operations	Aggregate	$2,000,000
Personal and Advertising Injury	Occurrence	$1,000,000
Fire Damage, Legal Liability	Any one fire	$100,000
Medical Expenses	Any one person	$5,000

The Owner shall be named as an additional insured by endorsement on the Contractor's policy as to the subject job.

C. AUTOMOBILE LIABILITY INSURANCE

Business (Commercial) Automobile Liability Insurance All owned, non-owned and hired coverages:

Bodily Injury and Property Damage Combined	$1,000,000

No deletions/exclusions from standard coverage form allowed without written consent of Owner.

D. UMBRELLA LIABILITY INSURANCE (EXCESS)

Umbrella Liability Insurance - $2,000,000

01 The Owner shall be named as an additional insured on the Contractor's policy as to the subject job.

02 This policy shall provide coverage over the Workmen's Compensation, Commercial General Liability and Business Automobile Liability. (Covered all owned, non-owned and hired automobiles).

3.0 PROPERTY INSURANCE (BUILDER'S RISK)

A The policy shall be written in the name of the Owner, Contractor, and subcontractors as their interest may appear.

B The policy shall be a “stand-alone” policy covering this work only, and shall not be a part of contractor’s “Reporting Form” policy.

C The policy shall be written on an all risk basis for physical loss or damage and include theft, vandalism, malicious mischief.

D The amount of coverage shall be for the full insurable value of work.

E The deductible shall not be over $5,000.00 without the approval of the Owner. (Deductible losses shall be paid by the Contractor.)

F The policy shall include an endorsement allowing Owner occupancy, and the insurance shall not be cancelled or altered on account of partial occupancy prior to completion.

G A subrogation clause shall waive subrogation as to the Contractor, subcontractor, sub-subcontractors, the Owner and his employees and representatives.

H The original builders risk policy shall be furnished to the Owner prior to start of the job.

4.0 BONDS

A. Statutory Performance Bond and Labor and Material Payment Bond, each in a personal sum equal to 100% of contract sum. File copies of the bond with the County Clerk and furnish the Owner a file receipt.

B. A Proposal Bond or Proposal Security in the amount of 10% of the greatest amount proposed must be submitted with formal proposals on contract or as otherwise specified in documents.

C. Performance and payment bonds shall remain in force throughout the warranty period of the contract.

D. The Work shall not commence until the bonds and insuring companies have been accepted as satisfactory by the Owner.

E. The original bonds will be delivered to the Owner with an attached authorization power of attorney.

END OF SECTION

SECTION 00 61 27

GENERAL CONDITIONS OF THE CONSTRUCTION CONTRACT

The American Institute of Architects' Document A201, "General Conditions of the Contract for Construction", 2017 Edition, form a part of the Contract Documents as if reproduced here.

Copies of this AIA document are on file in the Engineer's office and may be reviewed upon request. Copies may be purchased from the nearest American Institute of Architects chapter.

END OF SECTION

SECTION 00 73 00

SUPPLEMENTARY CONDITIONS
TO THE
GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION

The following supplements modify the "General Conditions of the Contract for Construction", AIA Document A201 - 2017. Where a portion of the General Conditions is modified or deleted by these Supplementary Conditions, the unaltered portions of the General Conditions shall remain in effect. The "General Conditions" are a part of these documents whether or not they are bound herein.

ARTICLE 1 - CONTRACT DOCUMENTS

1.1 BASIC DEFINITIONS

1.1.1 Revise the first sentence of subparagraph 1.1.1 as set forth below:

The Contract Documents consist of the Agreement, the Conditions of the Contract (General, Supplementary and other Conditions), Performance Bond, Labor and Material Payment Bond, the Drawings, the Specifications, all Addenda issued prior to execution of the Agreement and all Modifications thereto.

1.1.3 THE WORK

Add the following sentence to the end of paragraph 1.1.3:

The Work also includes all supplies, skill, supervision, transportation services and other facilities and things necessary, proper or incidental to the carrying out and completion of the terms of the contract and all other items of cost or value needed to produce, construct and fully complete the public work identified by the Contract Documents.

1.1.9 DESCRIPTION OF PARTIES
The following definitions apply to parties named in Contract Documents:

1. Owner: Beaumont Independent School District
   Purchasing Department
   3395 Harrison Avenue
   Beaumont, Texas 77706

2. Engineer: Salas O'Brien, LLC
   10930 W. Sam Houston Parkway N, Suite 900
   Houston, Texas 77064
   281-664-1900

1.1.10 ADDENDA

Addenda are written or graphic instruments issued prior to the execution of the Contract, which modify or interpret the bidding documents, including Drawings and Specifications, by additions, deletions, clarifications or corrections. Addenda will become part of the Contract Documents when the Construction Agreement is executed.

1.1.11 APPROVED, APPROVED EQUAL, APPROVED EQUIVALENT, OR EQUAL

The terms Approved and Approved Equal relate to the substitution of materials, equipment or procedure approved in writing by the Engineer prior to receipt of competitive sealed proposals. Refer to Article 3.19 Substitutions for procedure which must be followed after award of contract. The substitution procedure process to be followed prior to receipt of competitive sealed proposals is described in the instruction to proposers.

1.1.12 ABBREVIATIONS

N.I.C; or By Others; or By Owner; or Existing	Not in contract. Indicating work not to be done by this Contractor under this Agreement.
ADA	Americans with Disabilities Act of 1990
ADAAG	Americans with Disabilities Act Accessibility Guidelines for Buildings & Facilities
AIA	American Institute of Engineers
ACI	American Concrete Institute
AISC	American Institute of Steel Construction
AISI	American Iron and Steel Institute
ASA	American Standards Association
ASTM	American Society for Testing Materials
AWSC	American Welding Society Code
FS	Federal Specification
NBS	National Bureau of Standards
NEC	National Electrical Code
SPR	Simplified Practice Recommendation
UL	Underwriters Laboratories, Inc.
AISI	American Iron and Steel Institute
ANSI	American National Standards Institute

1.1.13 PROPOSAL DOCUMENTS

Proposal Documents consist of all documents bound into or referenced in the Project Manual, the Drawings, and Addenda related thereto. The Project Manual contains the Proposal and Bidding Requirements, Sample Forms, Conditions of the Contract, the Specifications, and a list of Drawings, and Schedules, some of which are bound into the Project Manual (Other Drawings and Schedules are bound separately). The terms “Bid” and “Competitive Sealed Proposal” shall have the same meaning.

1.1.14 PROJECT CONSULTANTS

Project Consultants are defined as all parties listed in paragraph 1.1.9 above, except the Owner.

1.1.15 MISCELLANEOUS OTHER WORDS

Provide: Whenever the word "provide" is used in these documents, it shall mean the same as "furnish and install".

1.2 CORRELATION AND INTENT OF THE CONTRACT DOCUMENTS:

Add the following to paragraph 1.2:

1.2.4 PRECEDENCE OF THE CONTRACT DOCUMENTS: The most recent issued Document takes precedence over previous issued forms of the same Document. The order of precedence is as follows with the highest authority listed first.

.1 The Agreement
.2 The Addenda
.3 The Supplementary Conditions
.4 The General Conditions of the Contract for Construction
.5 Drawings and Specifications shall have equal authority. Should these documents disagree in themselves, the Engineer will select the appropriate method for performing the work at no additional increase in the Contract Cost.

1.2.5 RELATION OF SPECIFICATIONS AND DRAWINGS: The Drawings and Specifications are correlative and have equal authority and priority. Should they disagree in themselves, or with each other, base the proposals on the most expensive combination of quality and quantity of work indicated. The appropriate method of performing the Work, in the event of the above mentioned disagreements, will be made by the Engineer. After award of the contract, and if necessary, an appropriate reduction in the contract will be accomplished by allowance expenditure authorization or change order.

1.2.6 OPTIONAL MATERIALS, BRANDS AND PROCESSES: When more than one is specified for a particular item of Work, the choice shall be the Contractor's. The final selection of color and pattern will be made from the range available within the option selected by the Contractor, unless the item is specified to match a specific color or sample furnished. Where particular items are specified only products of those named manufacturers are acceptable. Certain specified construction and equipment details may not be regularly included as part of the named manufacturer's standard catalog equipment but shall be provided by the manufacturer as required for the proper functioning of the equipment. Reasonable minor variations in equipment are expected and will be acceptable; however, indicated and specified performance and material requirements are minimum, and will be required in addition to standard accessories. The Engineer reserves the right to determine the equality of equipment and materials that deviate from any of the indicated and specified requirements.

1.2.6 OPTIONAL MATERIALS AND PROCESSES: When more than one material, product, item and / or process is specifically listed for a particular item of Work, the choice shall be the Contractor's. The final selection of color and pattern will be made from the range available within the option selected by the Contractor, unless the item is specified to match a specific color, existing finish or sample furnished.

1.2.7 OTHER ACCEPTABLE MANUFACTURERS: Where a particular manufacturer’s material(s), product(s) and / or item(s) is used as the basis of design, such item in conjunction with the specified attributes and performance requirements shall set the minimum standard to be furnished. Where other “acceptable manufacturers” are listed, the Contractor shall have the option of providing material(s), product(s) and / or item(s) from a listed manufacturer provided the listed manufacturer’s material(s), product(s) and / or item(s) proposed to be furnished meet or exceed all specified attributes and performance criteria. Reasonable minor variations may be expected and shall be acceptable. It is the Contractor’s responsibility to verify that a bid / proposal received from a listed “acceptable manufacturer” meets or exceeds all specified requirements PRIOR to the contractor’s submission of a bid or proposal to the Owner. No allowance shall be made for the Contractor’s use of a listed “acceptable manufacturer” who’s material(s), product(s) and / or item(s) does not meet or exceed all specified requirements. The Engineer reserves the right to determine the equality of material(s), product(s) and / or item(s) that deviate from any of the indicated and / or specified requirements.

Supplement Article 1 with the following paragraphs and sub-paragraphs:

1.7 MISCELLANEOUS OTHER DEFINITIONS

1.7.1 ADDENDA, ADDENDUM

Documents issued by the Engineer prior to execution of the Owner Contractor Agreement that modify or clarify the Proposal/Bidding Documents. The addenda become a part of the Contract Documents

1.7.2 ALTERNATIVE COMPETITIVE SEALED PROPOSALS

A separate amount stated on the Proposal/Bid Form which, if accepted by the Owner, will be added to or deducted from the Base Competitive Sealed Proposal. If accepted, the work that corresponds to the Alternative Proposal will become part of the Agreement between Owner and Contractor. Alternative Proposals shall remain valid for a minimum period of 30 days after receipt of proposals, regardless if an Owner - Contractor Agreement has been executed, unless indicated otherwise herein.

1.7.3 BASE COMPETITIVE SEALED PROPOSAL

The Contractor's competitive sealed proposal for the Work, not including any Alternative Proposals.

1.7.4 CONTRACT TIME

The period of time including Anticipated Weather Days that is established in the Contract Documents for Substantial Completion of the Work. This period of time is subject to authorized adjustments for Unanticipated Weather Days and other Calendar Day extensions of time as enumerated in the Contract Documents.

1.7.5 DATE OF AGREEMENT

The date the Owner formally awards a Contract for Construction of the Work. This date will be inserted on the first page of the Agreement Between Owner and Contractor and shall be referenced in Performance Bond and Payment Bond forms. See also Date of Commencement of the Work (1.7.6).

1.7.6 DATE OF COMMENCEMENT OF THE WORK

The date that either (1) the fully executed Agreement Between Owner and Contractor, or (2) a written Notice to Proceed is delivered to the Contractor. This date constitutes day zero ("0") of the stated Contract Time.

1.7.7 DATE OF FINAL COMPLETION

The date that all required construction is completed, including punch list work, for all phases or campuses, as applicable. This date shall be established in the Owner – Contractor Agreement based on either 1) the Contract Time stipulated by the Contractor on the Proposal Form; or 2) a guaranteed completion date as defined in an Alternate Proposal if accepted by the Owner. See AIA Document A201, paragraph 9.10.

1.7.8 DATE(S) OF SUBSTANTIAL COMPLETION

Projects which are not phased or do not involve multiple campuses shall have a single date of Substantial Completion. Projects which consist of sequential phases or multiple campuses shall have a date of Substantial Completion for each phase or campus, as applicable. See AIA Document A201 and Section 00 73 00, paragraphs 8.3 and 9.8.

1.7.9 DAY

The following days are referenced in the documents:

.1 Calendar Days: The days of the Gregorian Calendar. The Contract Time is established in Calendar Days and extensions of time granted for Regular Work Days lost, if any, will be converted to Calendar Days.

.2 Holidays: The days officially recognized by the construction industry in this area as a holiday; normally limited to the observance days of New Year's Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day and the day after, and Christmas Day.

.3 Regular Work Days: All calendar days except holidays, Saturdays, and Sundays. Requests for extensions of time shall be requested on the basis of Regular Work Days, and those days, if approved; will be converted to Calendar Days by multiplying Regular Work Days by a factor of one and three-tenths (1.3).

.4 Anticipated Weather Days: An allowance of Regular Work Days, established as probable days lost due to weather delays; said allowance to be included in the Contractor's proposed Completion Time on his Proposal Form.

.5 Weather Days: Regular Work Days when rain, flooding, snow, unusually high winds, excessively wet grounds, or similar circumstances prevent progress on major portions of the Work. The Contractor will be entitled to an extension of the Contract Time for the net additional time, if any, which results from deducting the amount of Anticipated Weather Days from the total amount of approved Weather Days.

.6 Net Weather Days: The difference in working days between Anticipated Weather Days and Weather Days.

1.7.10 NOTICE TO PROCEED

A notice that may be given by the Owner, or Engineer, to the Contractor that directs the Contractor to start the Work. It may also establish the Date of Commencement of the Work.

1.7.11 PUNCH LIST

A comprehensive list prepared by the Contractor prior to Substantial Completion to establish all items to be completed or corrected. This list may be supplemented by the Owner and / or Owner's Consultants. See AIA Document A201, paragraph 9.8.

1.7.12 UNIT PRICES

A cost for a unit of work as described in the Contract Documents. If accepted, the Owner may add or deduct Unit Price work at the amounts stated on the Proposal Form and such amounts shall not be a subject to additional mark up by the Contractor or his subcontractors. Unit prices accepted by the Owner shall be valid through the completion of the Contract. The owner may elect to reject unit prices prior to executing the Contract. If the unit prices are accepted, they will be incorporated into the Agreement. The Owner may elect to reject the unit prices bid without precluding the right to request Changes in the work as described in Article 7 of the General and Supplementary Conditions.

1.7.13 STRUCTURE OF SPECIFICATIONS

.1 In the preparation of the Specifications, an effort has been made to segregate the various sections of the specifications under headings, by trade. This is done only for convenience and shall not relieve the Contractor of the responsibility of furnishing every item indicated or specified whether properly segregated or not.

.2 No responsibility, either direct or implied, will be assumed by the Owner or the Engineer for omissions or duplications by the Contractor in the completion of the contract due to any alleged error in the arrangement of these specifications, nor shall any such segregation of work and materials serve to make the Engineer an arbiter in defining limits to the agreements between the Contractor and his subcontractor or suppliers.

.3 The misplacement, addition or omission of any letter, word or punctuation mark shall in no way damage the true spirit, intent, or meaning of these specifications.

.4 Abbreviations of the names of technical organizations and societies whose specifications, standards, or criteria are included by reference or noted by initials. References are the latest editions published prior to the date of the specifications unless otherwise noted.

1.7.14 INTERPRETATIONS OF DETAILS, METHODS, SPECIFICATIONS, ETC.

.1 The following paragraphs are intended to govern throughout these specifications as though repeated under each separate section. These paragraphs are herein only in order to simplify the specifications and avoid repetition.

.2 The Contractor shall be responsible for the proper working, workmanship, installation, operation, appearance and durability of items incorporated into the project. (The excuse that it was installed "as detailed or specified" and it does not function properly is not valid. If the Contractor is in disagreement with any items, details, methods, or specifications, he shall notify the Engineer in writing prior to their incorporation in the work. Such matters will be clarified in writing by the Engineer).

.3 All manufactured articles, materials and equipment shall be applied, installed, connected, erected, used, cleaned, and conditioned in accordance with printed instructions of the manufacturer.

.4 The Contractor shall execute each part of the Work in strict accordance with the Contract Documents. The Contractor and all sub-contractors shall have the qualifications and skill required to complete the work in each of the trades and specialties involved. Where there is any doubt as to the requirements or quality of the work, the Contractor shall secure instruction or clarifications from the Engineer before executing the work in question.

ARTICLE 2 - OWNER

2.2 INFORMATION AND SERVICES REQUIRED OF THE OWNER

2.2.1 Delete the last sentence.

Delete paragraph 2.2.5 in its entirety and substitute the following:

2.2.5 The Contractor will be furnished free of charge, twenty (20) copies of the Drawings and Specifications for the execution of the work. Provisions for additional sets shall be made; however, the Contractor shall pay actual reproduction costs of any additional copies required or requested.

2.4 OWNER'S RIGHT TO CARRY OUT THE WORK

Delete paragraph 2.4 in its entirety and substitute the following:

2.4 If the Contractor defaults or neglects to carry out the Work in accordance with the Contract Documents and fails, after receipt of written notice from the Owner, to commence and continue correction of such default or neglect with diligence and promptness, the Owner may, without prejudice to other remedies the Owner may have, correct such deficiencies. In such case, an appropriate Change Order shall be issued deducting from payments then or thereafter due the Contractor the cost of correcting such deficiencies, including compensation for Consultants' additional services and expenses made necessary by such default, neglect or failure. Such action by the Owner and amounts charged to the Contractor are both subject to prior approval of the Engineer. If payments then or thereafter due the Contractor are not sufficient to cover such amounts, the Contractor shall pay the difference to the Owner.

Supplement Article 2 with the following paragraphs / subparagraphs

2.5 OWNER'S RIGHT TO OCCUPY THE PROJECT

2.5.1 The Owner shall have the right to occupy or use without prejudice to the right of either party, any completed or largely completed portions of the project, notwithstanding the time for completing the entire Work or such portions that may not have expired. Such occupancy and use shall not constitute acceptance of any work not in accordance with the Contract Documents.

2.5.2 If such prior use delays the completion of the project, the Contractor shall be entitled to extension of time, which claim shall be in writing with supporting data attached.

2.5.3 Refer to Article 11 - Insurance and Bonds regarding property insurance requirements in the event of such occupancy.

ARTICLE 3 -CONTRACTOR

3.2 REVIEW OF CONTRACT DOCUMENTS AND FIELD CONDITIONS BY THE CONTRACTOR

Delete paragraphs 3.2.1, 3.2.2, 3.2.3 and 3.2.4 in their entirety and substitute the following:

3.2.1 Contractor shall carefully study and compare the Agreement, Conditions of the Contract, Drawings, Specifications, Addenda, and Modifications and shall at once report to the Engineer any error, inconsistency, or omission he may discover. Contractor shall be liable for any damage to Owner for failure to report any error, inconsistency or omission he may discover or should have discovered, but he shall not be liable to Owner or Engineer for any damage resulting from such error, inconsistency or omission which he should not have discovered or which he did discover and at once so reported. Contractor shall do no work without approved Drawings and Specifications.

3.2.2 The Contractor shall not be entitled to additional compensation for the "rework portion" of any additional work caused by his failure to carefully study and compare the contract documents prior to execution of the Work.

3.2.3 The Contractor shall make a reasonable attempt to interpret the Contract Documents before asking the Engineer for assistance in interpretation. The Contractor shall not ask the Engineer for observation of Work prior to the Contractor's field superintendent's personal inspection of the Work and his determination that the Work complies with the Contract Documents. The Contractor shall arrange meetings prior to commencement of the Work of all major subcontractors to allow the subcontractor to demonstrate his understanding of the Contract Documents to the Engineer and to allow the subcontractor to ask for any interpretation he may require.

3.2.4 If, in the opinion of the Engineer, the Contractor does not make a reasonable effort to comply with the above requirements of the Contract Documents and this causes the Engineer or his Consultants to expend an unreasonable amount of time in the discharge of the duties imposed on him by the Contract Documents, then the Contractor shall bear the cost of compensation for the Engineer's and / or Consultants' additional services made necessary by such failure. The Engineer will give the Contractor prior notice of intent to bill for additional services related to Articles 3.2.5 , 3.2.6, and 3.12 before additional services are performed.

3.2.5 If the Contractor has knowledge that any of the products or systems specified will perform in a manner that will limit the Contractor's ability to satisfactorily perform the Work or to honor his Warranty, he shall promptly notify the Engineer in writing, providing substantiation for his position. Any necessary changes, including substitution of materials, shall be accomplished by appropriate Modification.

3.2.6 Prior to pouring any concrete floor slabs, the Contractor shall submit plan and section drawings, at scale of ¼" = 1'0", of each mechanical room to the Engineer. These drawings shall be fully dimensioned showing all equipment piping, ductwork, electrical panels and devices, and structure, noting particularly the clearances proposed for each item. The Contractor shall make all corrections noted by the Engineer and resubmit the drawings until noted "Reviewed – No Exceptions" by the Engineer to ensure coordination among the trades. Once approved, the Contractor may begin Work on the floor slabs. The ¼" scale coordination drawings shall be required prior to the Engineer or Engineer reviewing any submittals relating to components affected by the coordination plans.

Contractor's application for payment requests shall not be approved once the project has entered the slab phase unless the coordination plans have been submitted and reviewed without exception. Delays on the project due to the failure of the Contractor to submit the coordination drawings shall not be grounds for substantiated delays or requests for extensions of time.

3.3 SUPERVISION AND CONSTRUCTION PROCEDURES

Add the following paragraphs:

3.3.4 The Contractor is especially cautioned to coordinate the routing of mechanical and electrical items prior to commencing these operations.

3.3.5 Beaumont Independent School District is a tobacco-free environment. No use of tobacco products will be allowed on the property at any time. The Contractor shall post signs, in both English and Spanish, at all entrances, notifying all employees, subcontractors, and suppliers of this provision. The Contractor shall take all necessary steps and precautions to ensure adherence to this policy.

3.5 WARRANTY

Add the following paragraphs:

3.5.2 In the event of failure of materials, products, or workmanship, either during construction or the warranty period (which shall be one year from the Date of Substantial Completion, except where a longer period is specified), the Contractor shall take appropriate measures to assure correction or replacement of the defective

items, whether notified by the Owner or Engineer. Items of work first performed after Substantial Completion shall have their warranties extended by the period of time between Substantial Completion and the actual performance of the Work.

3.5.3 Refer to warranty forms included under Section 01 77 00 – Close-Out Procedures , which will be required prior to final payment.

3.5.4 In the event an item under warranty fails, the Contractor shall extend the original warranty period by a length of time equal to the elapsed time which occurs from the notification in writing by the Owner or a warranty claim until acknowledgement by the Owner that the claim has been resolved.

3.5.5 Appropriately 11 months after Substantial Completion, the Contractor shall accompany the Owner and Engineer on a complete re-inspection of the Project and be responsible for correcting any / all additional deficiencies observed or reported.

3.6 TAXES

Add the following paragraph:

3.6.2 The Owner is exempt from the Texas Sales Tax on any purchase of tangible personal property and will issue Certificates of Exemption from the Texas Sales Tax on materials furnished by Contractors on School Construction projects. The Contractor shall give a written statement to the Owner (with a copy to the Engineer) as to the prorating of costs of skilled crafts, labor and materials for the project prior to awarding of a Construction Contract. The Contractor and subcontractors shall obtain Certificates of Resale from their suppliers in order to avoid payment of the State Sales Tax on materials incorporated in School projects. Failure of the Contractor to obtain Certificates of Resale from their suppliers shall make the Contractor responsible for absorbing the tax.

3.7 PERMITS, FEES, NOTICES, AND COMPLIANCE WITH LAWS

Supplement Paragraph 3.7.1 with the following sub-paragraphs:

3.7.1.1 The Owner shall pay directly to the governing authority, the cost of all permanent utility impact fees, capital recovery fees, utility assessments and similar non-construction related fees, unless specifically indicated herein. Verify discrepancies, if any, prior to submitting competitive sealed proposals.

3.7.1.2 The Owner shall pay all fees to the Texas Department of Licensing and Regulation (TDLR) for document review and project inspections relative to the Elimination of Architectural Barriers Act. The Engineer will submit the documents to the TDLR for review and approval.

3.7.1.3 The Owner shall be responsible for submitting Contract Documents to the governing authority for the purpose of obtaining required building permits from the City of Beaumont or Jefferson County, as applicable. Permit document submission will be made at such time that, under normal City / County scheduling.

3.7.1.4 The Contractor shall be responsible for obtaining all temporary utility charges, tap charges, water meter charges and any other similar fees assessed by jurisdictional authorities having control over this project related to the actual installation of building utilities and services.

3.7.1.5 The Contractor shall be responsible for obtaining and paying for all City and County Building Permits, plan checking fees and on-site inspection fees. The Contractor shall verify all such costs with the governing authority and include all such costs in the Base Proposal Amount.

3.7.1.6 The Contractor shall not be granted any extra compensation for not being able to start construction while awaiting the issuance of a building permit.

3.7.1.7 If the Contractor performs Work which he knew or should have known to be contrary to applicable laws, statues, ordinances, building codes, local rules or regulations, without such written notice to the Owner, the Contractor shall assume full responsibility for such Work and shall bear their attributable costs and penalties.

3.7.3 Delete in its entirety

3.8 ALLOWANCES

Paragraph 3.8.1 – Delete in its entirety and substitute the following:

3.8.1 The General Contractor shall include in his proposal the Allowances stated in the Specifications. Each stated Allowance describes the extent of Work to be included in the Allowance as either 1) material only, delivered and unloaded at the job site; or 2) materials, equipment and installation. The Contractor's overhead, profit, and other expenses contemplated for the allowance material, equipment and installation shall be included in the Base Proposal and is not part of the Allowance.

The Contractor shall purchase the Allowance materials, equipment and / or installation as directed by the Owner, or Owner's Consultant on the basis of the lowest responsible bid of at least three competitive bids. If the actual cost of the Allowance is more or less than the specified Allowance amount, the Contract Sum will be adjusted accordingly by Change Order.

3.8 SUPERINTENDENT

Delete paragraphs 3.9.1, 3.9.2 and 3.9.3 in their entirety and substitute the following:

3.9.1 The Contractor, within five days after the award of the Contract and prior to beginning any field operations, shall furnish to the Owner and the Engineer in writing the name and professional qualifications of the person(s) proposed by the Contractor as the Superintendent(s) and Project Manager. The Contractor shall not assign any person(s) as Superintendent(s) and Project Manager to whom the Owner or the Engineer has made reasonable objection. No increase in Contract Time or Contract Sum shall be allowed in the event the Owner or Engineer objects to any nominated Superintendent(s) and Project Manager.

3.9.2 The Contractor shall employ competent Superintendent(s), and necessary assistants who shall be in attendance at the Project site throughout the duration of the Work, up to and including Final Completion. Superintendent(s), Project Manager and assistants shall be in attendance at the Project site during the all regularly scheduled Project Meetings.

3.9.3 Prior to Final Completion, the Contractor shall not substitute a Superintendent(s) and Project Manager other than for death, disability, leaving the employ of the Contractor, or other substantial reason which cannot be avoided. Substitution of Superintendent(s) or Project Manager shall not be made without the consent of the Owner. The process and criteria described above shall be in force in the event a substitution of Superintendent or Project Manager is necessary. The Contractor shall reimburse the Owner, Engineer and his consultants (on a reasonable hourly basis) for additional costs incurred due to said substitution. No increase in Contract Time or Contract Sum shall be allowed in the event the Owner or Engineer objects to any nominated Superintendent(s) or Project Manager.

3.10 CONTRACTOR'S CONSTRUCTION SCHEDULES

Add the following subparagraph:

3.10.4 The Contractor shall submit to the Engineer with each monthly Application for Payment, a copy of the progress schedule showing all modifications required to have the schedule reflect appropriate revisions and actions necessary to assure that the project completion schedule is met. This provision shall be prerequisite for approval of Applications for Payment.

3.11 DOCUMENTS AND SAMPLES AT THE SITE

Add the following subparagraph:

3.11.2 The Contractor shall post all addenda on construction documents prior to commencing work on the site.

3.12 SHOP DRAWINGS, PRODUCT DATA AND SAMPLES

Add the following subparagraph:

3.12.6.1 If, in the opinion of the Engineer, the shop drawings indicated a lack of study and review by the Contractor is incomplete, or indicate an inadequate understanding of the work covered by the shop drawings, prior to submittal to the Engineer, the shop drawings will be returned, unchecked, to the Contractor for correction of any / all of these deficiencies for subsequent resubmittal. Additional service charges as outlined in 3.2.4 may be charged by the Engineer in this event.

3.12.7 Delete in its entirety and substitute the following:

The Contractor shall perform no portion of the Work for which the Contract Documents require submittal and review of Shop Drawings, Product Data, Samples or similar submittals until the respective submittal has been reviewed by the Engineer without request for re-submittal.

Add the following subparagraphs to 3.12:

3.12.11 The Contractor shall submit complete drawings, data and samples to the Engineer at least 30 days prior to the date the Contractor needs the reviewed submittals returned. The Contractor shall be prepared to submit color samples on any key items (such as quarry tile, vinyl wall covering, etc.) within thirty (30) days after the execution of the Agreement. The Engineer will finalize color selections ONLY after samples of all key items are received. Color selections of key items shall NOT be done piece meal.

3.12.12 The Contractor shall submit the number of copies of product data and samples which the Contractor and his subcontractors need for their use PLUS two additional sets for the Engineer, two additional sets for the Owner (one for initial review) and one additional set for each of the Owner's consultants involved with the particular section of Work. Where shop drawings are involved, submit one high quality reproducible transparency and one opaque print of the shop drawing for the Engineer, one opaque print of the shop drawing for the Owner, and one additional opaque print for each of the Owner's consultants involved with the particular section of Work. The reproducible transparency will be marked by the Engineer and/or his consultants, and returned to the Contractor for printing and distribution as required. After final review and correction of the submittal, the Contractor shall send two corrected sets of opaque prints to the Engineer, one to the Owner, and one to each of the Owner's consultants involved with the particular section of Work.

3.12.13 The Contractor shall provide composite drawings within 3 months of execution of the Agreement showing how all piping, ductwork, lights, conduit and equipment, etc. will fit into the ceiling space allotted, including clearances required by the manufacturer, by Code, or in keeping with good construction practice. Space for all trade elements must be considered on the same drawing. Drawings shall be 1/4" per foot minimum scale and shall include invert elevations, elevation views and sections required to meet the intended purpose. Trades required to participate include, but are not necessarily limited to structural, mechanical, plumbing, fire sprinkler, electrical and special systems.

3.13 USE OF SITE

Add the following subparagraphs:

3.13.2 The Contractor's access to the site, parking, field office location, material and equipment storage, and confinement of said areas shall be coordinated with, and approved by the Owner prior to the Contractor's mobilization on the site. Once agreed upon, the Contractor shall not adjust or increase any of the above areas without consent by the Owner.

3.13.3 The Contractor's use of the site shall not interfere with the normal operation of the Owner. The Contractor shall not interface in any manner with students. The Contractor shall not interface in any manner with staff members unless specifically approved by the campus principal.

3.13.4 The Contractor shall use all means necessary to eliminate students' reasonable access to the Contractor's construction operations areas. Safety of the students is paramount.

3.15 CLEANING UP

Add the following subparagraph:

3.15.3 Prior to, and as a prerequisite for the Engineer's inspection for Substantial Completion, the Contractor shall clean exterior and interior surfaces exposed to view; remove temporary labels, stains, and foreign substances; polish transparent and glossy surfaces; clean equipment and fixtures to a sanitary condition; replace air filters in mechanical equipment; clean roofs, gutters, and downspouts; remove obstructions and flush debris from drainage systems; clean site; sweep paved areas and rake clean other surfaces; remove trash and surplus materials from the site.

3.18 INDEMNIFICATION:

Revise the first sentence of paragraph 3.18.1 to read as follows:

3.18.1 The Contractor shall defend, indemnify and hold harmless the Owner, its trustees and employees, the Engineer, Engineer's consultants, and their agents and employees of any of them from and against claims, damages, losses and expenses, including but not limited to attorneys' fees, arising out of or resulting from performance of the Work, provided that such claim, damage, loss or expense is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the Work itself) including loss of use resulting there from, but only to the extent caused in whole or in part by negligent acts or omissions of the Contractor, a Subcontractor, anyone directly or indirectly employed by them or anyone for whose acts they may be liable, regardless of whether or not such claim, damage, loss or expense is caused by a party indemnified hereunder.

Supplement Article 3 with the following paragraph / subparagraphs:

3.19 REPRODUCIBLE RECORD DRAWINGS AND ELECTRONIC DOCUMENTS

3.19.1 At the completion of the project, the contractor shall submit one (1) complete set of drawings with all changes made during bidding and construction, including concealed mechanical, electrical, and plumbing items. Drafting shall be compatible and the Contractor shall submit these as Dayrex film positive reproducibles. The record drawings shall delete the seal of the Architect and/or Engineer and any reference to those firms providing professional services to the Owner. Additionally the Contractor shall provide modified electronic documents on Auto Cad version 14 on CD ROM Disk.

3.20 PREVAILING WAGE RATES

3.20.1 No employee used in this construction may be paid less than the minimum wage rate provided in Article 5959d, Vernon's Civil Statues, The Texas Minimum Wage Act of 1970. Refer to Wage Rates Schedule, included herein. The Contractor shall provide proof to the Owner that all employees, including employees of subcontractors, are paid in accordance with State of Texas statutes. The General Contractor shall complete the Owner's wage rate survey forms for all work performed by this company and subcontractors. Each separate scope of work shall be addressed with all column headings answered. These must be returned in a manner acceptable to the Owner before the first payment is made to each subcontractor. See Article 16 – LABOR STANDARDS below for the Owner's Wage Rate Survey for Educational Construction.

3.21 ANTITRUST VIOLATIONS

3.21.1 To permit the Owner to recover damages suffered; in antitrust violations, the Owner/Contractor Agreement shall include the following, "Contractor hereby assigns to Owner any and all claims for overcharges associated with the Agreement which are under the antitrust laws of the United States, 15 U.S.C.A., Sec. 1 et.seq. (1973)". The Contractor shall include this provision in his agreements with each subcontractor and supplier. Each subcontractor shall include such provisions in agreements with sub-subcontractors and suppliers.

ARTICLE 4 - ADMINISTRATION OF THE CONTRACT

4.2 ENGINEER'S ADMINISTRATION OF THE CONTRACT

4.2.1 Delete paragraph 4.2.1 in its entirety.

4.2.7 Delete the words “and approve” in the first line of the paragraph.

ARTICLE 5 - SUBCONTRACTORS

5.2 AWARD OF SUBCONTRACTORS AND OTHER CONTRACTS FOR PORTIONS OF THE WORK

Delete paragraphs 5.2.1, 5.2.2, 5.2.3, and 5.2.4 in their entirety and substitute the following:

5.2.1 The Owner’s Proposal evaluation criteria includes the requirement for the Proposer / Contractor to submit with the Proposal proposed sub-contractors for selected portions of the Work which the Proposal is based on. Refer to Specification section 00 45 17 for required sub-contractors to be submitted with the Proposal.

5.2.2 As soon as practicable after Award of the Contract but no later than 10 days prior to the submittal date for the Contractor's first Application for Payment, Contractor shall furnish to the Owner and Engineer in writing the names of the persons or entities (including those who are to furnish materials or equipment fabricated to a special design) proposed for each of the principle portions of the Work. Where Subcontractors or Sub-subcontractors have been listed in the Specifications or in an Addendum as a Listed Subcontractor the proposed entity shall be one of those firms listed, unless agreement has been reached to accept a proposed Substitute Subcontractor as listed on the Proposal Form. Regarding proposed persons or entities to perform portions of the Work where no Listed Subcontractors have been listed or approved by Addendum, the Engineer will promptly reply to the Contractor in writing stating whether or not the Owner or the Engineer, after due investigation, has objection to any such proposed person or entity. Failure of the Owner or Engineer to reply promptly shall constitute notice of no objection. Failure of the Contractor to submit the subject names in a timely manner will delay processing of the Contractor's Application for Payment.

5.2.3 The Contractor shall not contract with a proposed person or entity to which the Owner or Engineer has made a timely objection. The Contractor shall not be required to contract with anyone to whom the Contractor has made an objection under the provisions of paragraph 5.2.1.

5.2.4 If the Owner or Engineer has objection to a person or entity proposed by the Contractor, the Contractor shall propose another to whom the Owner or Engineer has no objection. The Contract Sum shall be increased or decreased by the difference in cost occasioned by such change and an appropriate Change Order shall be issued. However, no increase in the Contract Sum shall be allowed for such change unless the Contractor has acted promptly and responsively in submitting names as required in paragraph 5.2.1.

Add the following paragraphs to Article 5.2

5.2.5 Prior to such substitution the Contractor shall notify the Engineer of his intent and reasons for such proposed substitutions. The Contractor shall not change a Subcontractor, person or entity previously selected if the Owner or Engineer makes objection to such change.

5.2.6 The Contractor shall submit the list of proposed Subcontractors on AIA Document G805. The Contractor may obtain blank copies from the Engineer.

5.2.7 The Contractor and sub-contractors are required to visit the site and completely familiarize himself with the existing conditions prior to the submission of Proposal(s). No additional increase in the Contract amount will be provided when existing or known conditions require a certain amount of work to comply with the intent of the Contract Documents.

5.3 SUBCONTRACTUAL RELATIONS

Add the following subparagraph:

5.3.2 The Drawings and Specifications have been organized to facilitate work required by various trades; however, each Subcontractor shall formulate their bid and provide their respective work based on a complete set of Contract Documents. No allowance for time or cost shall be made by the Owner for a subcontractor who bases their scope of work on a partial set of Contract Documents.

ARTICLE 6 - CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

6.1 OWNER'S RIGHT TO PERFORM CONSTRUCTION AND TO AWARD SEPARATE CONTRACTS

6.1.1 Delete the last sentence "If the Contractor claims… make such Claim as provided in Paragraph 4.3"

6.2 MUTUAL RESPONSIBILITY

6.2.3 Delete paragraph 6.2.3 in its entirety.

ARTICLE 7 - CHANGES IN THE WORK

7.4 MINOR CHANGES IN THE WORK

7.4.1 Delete the words "or extension of the contract time".

Supplement to Article 7 with the following paragraphs / sub-paragraphs:

7.5 CHANGES FUNDED BY ALLOWANCES

7.5.1 Allowances balances may be used to fund changes in the work. The Contractor will not be allowed an overhead and profit mark-up when changes in the work are funded by one of the Allowances.

7.6 ALLOWABLE MARKUPS FOR CHANGES IN THE WORK

7.6.1 In Subparagraphs 7.2.2, 7.3.3, 7.3.6 the allowance for the combined overhead and profit included in the total cost to the Owner shall be based on the following schedule:

.1 For the Contractor for work performed by the Contractor's own forces, a maximum markup of 10 percent of that cost.
.2 For the Contractor for work performed by the Contractor's Subcontractor(s), 5 percent of the amount due the Subcontractor (s).
.3 For each Subcontractor of Sub-subcontractor involved, for work performed by that Subcontractor's or Sub-subcontractor's own forces, 10 percent of the cost.
.4 For each Subcontractor for work performed by the Subcontractor's Sub-subcontractor's, 5 percent of the amount due the Sub-subcontractor(s).
.5 Cost to which overhead and profit is to be applied shall be determined in accordance with Subparagraph 7.3.6.
.6 In order to facilitate checking of quotations for extras or credits, all competitive proposals of contractors, Subcontractors, and Sub-subcontractors, (except those so minor that their propriety can

be seen by inspection) shall be accompanied by a complete and detailed work sheet showing itemization of costs including labor, materials and other costs.

ARTICLE 8 - TIME

8.1 DEFINITIONS

8.1.2 Delete this subparagraph and substitute the following:

8.1.2 Unless agreed otherwise, the date inserted on the Agreement form and the Date of Commencement of the Work shall be as follows:

.1 The date inserted on the first page of the Agreement form will be the date the Owner formally awards the Contract. As soon as feasible after receipt of Competitive Sealed Proposals, the Engineer will present Agreement forms to the Contractor for his review and signature; the Contractor will be allowed a maximum of five (5) days from the date the prepared Agreements are presented to him to 1) obtain the required bond forms and insurance certificates and 2) return the executed Agreement and supporting documents to the Engineer for transmittal to the Owner for his final review and execution.

.2 The Date of Commencement of the Work is the date that either (1) the fully executed Agreement or (2) a written Notice to Proceed is delivered to the Contractor and constitutes day "0" (zero) of the stated Completion Time.

8.3 DELAYS AND EXTENSIONS OF TIME

8.3.4 Add the following Paragraph

The following is a requirement of the Contract and will be included in the Agreement Between Owner and Contractor under Time of Completion.

Under the provisions of the Base Proposal, the work to be performed under this Contract shall be commenced within 10 calendar days and substantially completed in accordance with Substantial Completion date set forth in the Summary of Work. The parties hereto agree that time is of the essence of this contract and that the pecuniary damages which would be suffered by the Owner, if the Contractor does not complete all work called for in the contract documents by the specified date, are in their very nature difficult of ascertainment.

It is therefore expressly agreed as a part of the consideration inducing the Owner to execute this contract that the Owner may deduct from the final payment made to the Contractor a sum equal to $1,000.00 per day for each and every calendar day beyond the agreed date which the Contractor shall require for Substantial Completion of the work included in this contract. It is expressly understood that the said sum per day is agreed upon as a fair estimate of the pecuniary damages which will be sustained by the Owner in the event that the work is not completed within the agreed time, or within the legally extended time, if any, otherwise provided for herein. Said sum shall be considered as liquidated damages only and in no sense shall be considered a penalty, said damage being caused by additional compensation to personnel, for loss of interest on money, additional service fees from Owner's Consultants and other miscellaneous increased costs, all of which are difficult to exactly ascertainment."

ARTICLE 9 - PAYMENTS AND COMPLETION

9.2 SCHEDULE OF VALUES

Add paragraph 9.2.2 and subparagraphs as follows:

9.2.2 In order to facilitate the review of Applications for Payment, the Schedule of Values shall be submitted on AIA Documents G702 and G703 or other similar forms approved by the Engineer, and shall include the following:

9.2.2.1 General Contractor's costs for Contractor's fee, bonds and insurance, mobilization, record documents, O&M manuals, etc., shall be listed as individual line items.

9.2.2.2 Contractor's costs for various construction items shall be detailed. For example, concrete work shall be subdivided into footings, grade beams, floor slabs, paving, etc. These subdivisions shall appear as individual line items.

9.2.2.3 On major subcontracts, such as mechanical, electrical and plumbing, the schedule shall indicate line items and amounts in detail (for example; underground, major equipment, fixtures, installation of fixtures, start up, etc.).

9.2.2.4 Costs for subcontract Work shall be listed without any additional General Contractor's costs for overhead, profit or supervision.

9.2.2.5 Where payment for stored materials may be requested prior to installation, material and labor shall be listed as separate line items.

9.2.2.6 Refer to Specification section 01 29 73 – Schedule of Values for additional description and requirements.

9.3 APPLICATIONS FOR PAYMENT

9.3.1 Delete 9.3.1 in its entirety and substitute the following:

9.3.1 At least ten days before the date established for each progress payment, the Contractor shall submit to the Engineer an itemized Application for Payment for operations completed in accordance with the schedule of values. Prior to this submittal, the Contractor shall contact the Engineer's Field Department for on-site review of the proposed application. Upon approval by the Engineer's Field Department, the Application for Payment shall be notarized and submitted to the Engineer.

Add the following subparagraphs to 9.3.1:

9.3.1.3 Included shall be data required to support the Contractor's right to payment as may be required by the Owner or Engineer, such as copies of requisitions from subcontractors and material suppliers, and reflecting retainage, if provided for elsewhere in the contract documents.

9.3.1.4 Until Final Completion and Contract Close-Out, the Owner shall pay ninety five percent (95%) of the amount due the Contractor on account of progress payments, except retainage will be twenty percent (20%) for the amount due the Contractor for contractor’s fee on account of progress payments.

9.3.2 Delete this subparagraph in its entirety and substitute the following:

9.3.2 Payments will be made on account of materials or equipment 1) incorporated in the Work; 2) suitably stored at the site; and / or 3) suitably stored at some off-site location provided the following conditions are met for off-site storage:

.1 The location must be agreed to, in writing, by the Owner and Surety.
.2 The location must be a bonded warehouse.
.3 Surety must agree, in writing, to each request for payment.
.4 The Contractor must bear the cost of the Owner's and Engineer's expenses related to visiting the off-site storage area.
.5 Transportation of the off-site stored materials to the site shall be made by common carrier; thereby eliminating any contractual relationship with the Owner.

Payments for materials or equipment stored on or off the site shall be conditioned upon submission by the Contractor of bills of sale or such other procedures satisfactory to the Owner to establish the Owner's title to such materials or equipment or otherwise protect the Owner's interest, including applicable insurance, naming

the Owner as insured. Under no circumstances will the Owner reimburse the Contractor for down payments, deposits, or other advance payments for materials or equipment.

The Contractor acknowledges that the review of materials stored off site is an additional service of the Engineer and shall be charged for that service. The cost for that service will be established by the Engineer and is not subject to appeal.

Add the following subparagraphs to 9.3:

9.3.4 The Contractor shall submit requests for payment in quadruplicate originals using for the “top sheets”, originals of APPLICATION AND CERTIFICATE FOR PAYMENT AIA DOCUMENT G702; continuation sheets showing in detail the amounts requested, etc., may be submitted on CONTINUATION SHEET AIA DOCUMENT G703 or a similar document using the same format if approved by the Engineer. All blank spaces in AIA DOCUMENT G702 must be completed and the signatures of the Contractor and Notary Public shall be original on each form. By submitting his application for payment, the Contractor certifies that the individual signing the application is authorized to do so. Additionally, if the Contractor prepares his application for payment utilizing “Excel” spreadsheet software, he shall submit a duplicate 3-1/2” high-density floppy disk with each application for payment to facilitate the Engineer’s review of the application.

9.4 CERTIFICATES FOR PAYMENT

Add the following subparagraphs to 9.4:

9.4.3 The Engineer will affix his signature to the same form described in Paragraph 9.3.4 to signify his certification of payment provided the application is otherwise satisfactory.

9.6 PROGRESS PAYMENTS

9.6.1 Delete this subparagraph and substitute the following:

9.6.1 After the Engineer has issued a Certificate for Payment, the Owner shall make progress payments in accordance with the following subparagraph, which shall be inserted as Article 5.1 Progress Payments in the Owner-Contractor Agreement, AIA Document A101, 2017 Edition.

Based upon the applications for payment and supporting documents submitted to the Engineer by the Contractor and certification of the amount payable by the Engineer, the Owner shall make progress payments on account of the contract sum to the Contractor as provided in the contract documents for the period ending the last day of the month as follows:

.1 Not later than twenty-five (25) days following the end of the period covered by the Application for Payment, ninety-five percent (95%) of the portion of the Contract Sum properly allocable to subcontracts, labor, materials, and equipment incorporated in the work and ninety-five percent (95%) of the portion of the contract sum properly allocable to materials and equipment suitably stored at the site or at some other location agreed upon in writing (subject to the conditions listed in Article 9.3.2), less the aggregate of previous payments made by the Owner.

.2 Upon Substantial Completion of the entire work, a sum sufficient to increase the total payments to ninety-five percent (95%) of the contract sum, less such amounts as the Engineer shall determine for all incomplete work and unsettled claims as provided for in the Contract Documents.

.3 Final release of the full 5% retainage shall be upon final acceptance by the Engineer and Owner of all close-out documentation and procedures. Partial release of retainage will not be considered.

9.7 FAILURE OF PAYMENT:

9.7.1 Delete the phrase "or awarded by binding dispute resolution" in the first sentence of the paragraph.

9.8 SUBSTANTIAL COMPLETION

9.8.1 Add the following subparagraphs:

9.8.1.1 Projects that involve phased sequential construction or projects that involve separate work on multiple campuses shall have Certificates of Substantial Completion issued for each phase or campus, as applicable. All conditions for Substantial Completion, including liquidated damages, shall apply for each date of Substantial Completion for each phase or campus, as applicable.

9.8.1.2 Individual Substantial Completion Dates for each phase or campus shall be determined and agreed upon by the Owner, Engineer and Contractor. Where an Alternative Proposal dictating a required, guaranteed completion date (dates) is included in the Proposal Form and accepted by the Owner, the date(s) stated therein shall establish the Substantial Completion Dates to be incorporated into the Agreement.

9.8.1.3 In order for the project, a major portion thereof, a project phase or project campus to be considered Substantially Complete, the following conditions must be met:

.1 All inspections by governmental authorities having jurisdiction over the project must have been finalized; any remedial work required by them must have been completed; and Certificates of Occupancy and similar governmental approval forms must have been issued and copies delivered to the Owner and Engineer.

.2 All work, interior and exterior, shall have been completed and cleaned except minor items which, if completed after occupancy, will not, in the Owner's opinion, cause any interference to the Owner's use of the building or any portion thereof. A significantly large number of items to be completed or corrected will preclude the Engineer from issuing a Certificate of Substantial Completion. The Owner and Engineer will be the sole judge of what constitutes a significantly large number of items. It is anticipated that the detailed list of items of work to be completed or corrected at the Date of Substantial Completion will be no longer than three (3) typed pages.

.3 All work, including cleanup, touch-up painting, testing of equipment, etc., must be 100% complete. The only exception will be for items of work previously installed in a correct manner, in proper working order that may have failed due to manufacturing defects and require re-ordering.

9.8.2 Add the following subparagraphs:

9.8.2.1 The Contractor’s superintendent shall participate in the preparation of the Contractor’s punch list that is submitted to the Engineer and Owner for supplementation. Upon receipt, the Engineer shall perform a spot review to determine the adequacy and completeness of the Contractor’s punch list. Should the Engineer determine that the Contractor’s punch list lacks sufficient detail or requires extensive supplementation, the punch list will be returned to the Contractor for further inspection and revision. The date of Substantial Completion will be delayed until the punch list submitted is a reasonable representation of the work to be done.

9.8.2.2 Upon receipt of an acceptable Contractor’s punch list, the Contractor’s Superintendent shall accompany the Engineer, his Consultants and the Owner (at his discretion) during their inspections and the preparation of their supplements to the Contractor’s punch list. The Superintendent shall record or otherwise take note of all supplementary items. The Engineer will endeavor to furnish to the Contractor typed, hand written or recorded supplements to the punch list in a prompt manner; however, any delay in the Contractor’s receiving said supplements from the Engineer will not be cause for a claim for additional cost or extension of time as the Contractor’s Superintendent shall have been in attendance during the inspections of the Engineer and his Consultants and will have been expected to take his own notes.

9.8.5 Delete in its entirety and substitute with the following:

9.8.5 The Certificate of Substantial Completion shall be submitted to the Owner and Contractor for their written acceptance of responsibilities assigned to them in such Certificate. Upon such acceptance and consent of surety, if any, the Owner, at his sole discretion, may make payment of retainage applying to such Work or

designated portion thereof. Such payment, if made, shall be adjusted in the Owner's favor for Work that is incomplete or not in accordance with the requirements of the Contract Documents.

9.8.5 Add the following subparagraph:

9.8.5.1 After the date of Substantial Completion of the project as evidenced by the Certificate of Substantial Completion, 2017 Edition, the Contractor will be allowed a period of thirty (30) days, unless extended by mutual agreement or provision of the Contract, within which to complete all work and correct all deficiencies contained in the punch list attached to the Certificate of Substantial Completion. Failure by the Contractor to complete such corrections within the stipulated time will be reported to the Contractor's surety. In the report of deficiency the Contractor and surety will be informed that, should correction remain incomplete for fifteen (15) additional days, the Owner will initiate action to complete corrective work out of the remaining contract funds in accordance with Article 14.2. Additional costs of the Owner, Engineer, and other consultants incurred because of the Contractor's failure to complete the correction of deficiencies within thirty (30) days after the date of Substantial Completion, unless extended by mutual agreement or provision of the contract, will be deducted from the funds remaining to be paid to the Contractor. Should corrective work following Substantial Completion require more than one re-inspection after notification by the Contractor that corrections are complete, the cost of subsequent inspections shall also be deducted from funds remaining unpaid to the Contractor.

9.9 PARTIAL OCCUPANCY OR USE

Delete the third sentence of paragraph 9.9.1

9.10 FINAL COMPLETION AND FINAL PAYMENT

9.10.2 At subparagraph 9.10.2, modify as follows:

.1 At item / provision designated (4), delete the phrase "if any".
.2 At item / provision designated (5), delete the phrase "If required by the Owner".

9.10.2 Add the following to subparagraphs:

9.10.2.1 Prior to final payment and in addition to other final closeout items specified, the Contractor shall submit in duplicate to the Engineer the following completed forms:

01 Contractor's Affidavit of Payment of Debts and Claims, AIA Document G706.(modified)
02 Contractor's Affidavit of Release of Liens, AIA Document G706A.(modified)
03 Contractors, Subcontractors and suppliers separate Lien Releases on the prescribed forms with signature and notary seal on the same sheet of paper.
04 Consent of Surety to Final Payment, AIA Document G707.
05 General Contractor's guarantee – notarized.
06 Subcontractor's guarantees – notarized.
07 Special extended warranties and guarantees – notarized.
08 Notarized affidavit from each subcontractor or supplier who furnished material incorporated into the Work stating that no asbestos building materials were used.
09 Maintenance and instruction manuals. Three (3) sets of each bound in a three inch (3") 'D-slant' ring binder.
10 Record Drawings. Auto Cad Electronic Disks & CD.
11 Final list of subcontractors (AIA Document G805).
12 Refer to Specification section 01 77 00 for additional close-out requirements
13 Note: The forms required in items 01 through 08 above shall each be furnished with original signatures and all blanks filled in.

Documents identified as affidavit must be notarized. All manuals will contain an index listing the information submitted. The index sections will be divided and identified by tabbing each section as listed in the index.

9.10.4 Delete in its entirety and substitute the following:

9.10.4 Final payment, constituting the entire unpaid balance of the Contract Sum, as adjusted by Change Order, shall be paid by the Owner to the Contractor thirty-one (31) days after Owner's receipt of the Final Certificate of Payment issued by the Engineer; provided all Work has been completed, the Contract fully performed, and all Close-Out procedures and documentation is complete. Partial release of retainage, if any, prior to Final Payment shall be at the sole discretion of the Owner

Add the following subparagraph:

9.10.4.1 Acceptance of Final Payment by the Contractor, a Subcontractor or Material Supplier shall constitute a waiver of claims by that payee except those previously made in writing and identified by that payee as unsettled at the time of final Application for Payment.

ARTICLE 10 - PROTECTION OF PERSONS AND PROPERTY

10.2 SAFETY OF PERSONS AND PROPERTY

Add the following subparagraph:

10.2.7.1 The Contractor shall be responsible for taking all precautions necessary to protect the work in place from any freezing weather conditions which could cause any potential damage to portions or all work in place. The Contractor shall be responsible for performing all repairs and/or replacement of any work that results from freezing weather conditions.

10.3 HAZARDOUS MATERIALS

Delete subparagraph 10.3.2 in its entirety and substitute the following:

10.3.2 If requested in writing by the Contractor, the Owner shall obtain the services of a licensed laboratory to verify a presence or absence of the material or substance reported by the Contractor and, in the even such material or substance is found to be present, to verify that is has been rendered harmless. If requested in writing by the Contractor or Engineer, the Owner shall furnish in writing to the Contractor and Engineer, the names and qualifications of persons or entities who are to perform tests verifying the presence or absence of such material or substance or who are to perform the task of removal or safe containment of such material or substance. The Contractor and the Engineer will promptly reply to the Owner in writing stating whether or not either has reasonable objection to the persons or entities proposed by the Owner. If either the Contractor or Engineer has an objection to a person or entity proposed by the Owner, the Owner shall propose another to whom the Contractor and the Engineer have no reasonable objection.

Delete subparagraphs 10.3.3 and 10.3.6 in their entirety.

Add the following paragraphs / subparagraphs:

10.5 ASBESTOS, LEAD OR PCBs CONTAINING MATERIALS

10.5.1 The Contractor and each subcontractor, sub-subcontractor and suppliers prior to final payment, shall submit an original notarized statement on their letterhead certifying "to the best of their information, knowledge, and belief asbestos, asbestos containing materials, and PCBs have not been used or incorporated into the Work and lead or lead bearing materials have not been incorporated into potable water systems." For the purpose of definition as used in this statement, the term "potable water systems" includes, but is not limited to, those water systems for drinking fountains, all sinks, showers, bath tubs, residential and commercial kitchen equipment, ice machines, and hose bibs, as applicable to the project.

10.5.2 To the best knowledge of the Owner, the Engineer and his consultants, no products or materials containing asbestos or polychlorinated biphenyl (PCB) or other toxic substances have been specified for this project. No products or materials containing asbestos or PCB are to be incorporated in this project. In the event the

Contractor or his Sub-contractors become aware that any products or materials specified, ordered, scheduled for or already incorporated in the work on this project, contain asbestos, or PCB, the situation shall be reported immediately to the Owner and Engineer in writing. An acceptable, equal substitute for the product or material in question shall be proposed by the Contractor and the product or material in question, if already onsite or incorporated in the work, shall be removed from the site immediately and returned to the supplier or manufacturer.

ARTICLE 11 - INSURANCE AND BONDS

11.1 CONTRACTOR'S LIABILITY INSURANCE

Delete paragraph 11.1.1 in its entirety and substitute the following:

11.1.1 Refer to Section 00 61 25 - Insurance & Bonds Requirements

11.1.2 Delete reference to “Subparagraph 11.1.1” and insert “Section 00 61 25 - Insurance Certificates and Bonds”.

11.1.3 Delete references to “Subparagraphs 11.1 and 11.1.2” and insert “Section 00 61 25 - Insurance Certificates and Bonds”.

11.3 PROPERTY INSURANCE

Delete paragraph 11.3.1 and subparagraphs 11.3.1.1, 11.3.1.2, 11.3.1.3, 11.3.1.4, and 11.3.1.5 in their entirety.

Delete paragraphs 11.3.2, 11.3.3, 11.3.4, 11.3.5, 11.3.6, 11.3.7, 11.3.8, 11.3.9, and 11.3.10 in their entirety.

ARTICLE 12 – UNCOVERING AND CORRECTION OF WORK

12.2.2 AFTER SUBSTANTIAL COMPLETION

Add the following to 12.2.2.1:

The “prompt” correction of defective work by the Contractor after receipt of Warranty Claim notification from the Owner as described above shall be defined as follows:

01 The Contractor shall make written response to the Owner within twenty-four (24) hours of receipt of the Warranty Claim acknowledging receipt of the claim and providing the proposed schedule to conduct corrective work. Corrective work shall not interfere with the Owner’s normal operation and use of the Work, unless expressly approved by the Owner.

02 For corrective work which is not a life safety issue or which will not, by the nature of the defect, cause subsequent damage to the building or other Work, corrective work shall be completed within fourteen (14) days.

03 For corrective work which by its nature may cause subsequent damage to the building or other Work, corrective work required to prevent subsequent damage shall be completed within twenty-four (24) hours, and if such work is a temporary repair, permanent repair of the corrective work shall be completed within seven (7) days. The Contractor shall appropriately complete all corrective work relative to subsequent damage caused by a Warranty Claim.

04 For corrective work which affects services to, and ordinary use of the Building, corrective work shall be completed within twenty-four (24) hours, and if such work is a temporary repair, permanent repair of the corrective work shall be completed within seven (7) days.

05 The time frames stated above for completion of permanent corrective work shall be equitably adjusted as required for legitimate delays caused by weather delays, material acquisition and other factors beyond the Contractor’s direct control.

ARTICLE 13 - MISCELLANEOUS PROVISIONS

Add the following subparagraph:

13.6 INTEREST

Delete paragraph 13.6 and subparagraph 13.6.1 in their entirety.

Add the following paragraphs:

13.8 The Owner shall have the right to examine, copy and/or audit the books and other records in possession of the Contractor relating to this Contract at any time deemed necessary by the Owner.

ARTICLE 14 - TERMINATION OR SUSPENSION OF THE CONTRACT

14.2 TERMINATION BY THE OWNER FOR CAUSE

Add the following Paragraph:

14.2.5 Contractor hereby assigns the Owner any and all claims for overcharges associated with this Contract which arise under the antitrust laws of the United States, 15 U.S.C.A. Section 1 ET.SEQ. (1973).

Add the following Paragraph:

14.4 TERMINATION BY THE OWNER FOR CONVENIENCE

Delete subparagraph 14.4.3 in its entirety and substitute the following:

14.4.3 In case of such termination for the Owner's convenience, the Contractor shall be entitled to receive payment from the Owner on the same basis provided in Subparagraph 14.1.3.

Add the following Article:

ARTICLE 15 - CLAIMS AND DISPUTES

Delete paragraph 15.1.1 in its entirety and substitute the following:

15.1.1 Definition. A Claim is a demand or assertion by one of the parties seeking, as a matter of right, adjustment or interpretation of Contract terms, payment of money or other relief with respect to the terms of the Contract. The term "Claim" also includes other disputes and matters in question between the Owner, Engineer and Contractor arising out of or relating to the Contract. Claims must be made by written notice. The responsibility to substantiate claims shall rest with the party making the claim.

15.2 INITIAL DECISION

Delete paragraph 15.2.6 in its entirety and replace with the following:

15.2.6 If a claim has not been resolved after consideration of the foregoing and of further evidence presented by the parties or requested by the Engineer, the Engineer will notify the parties in writing that the Engineer’s decision will be made within seven days, such decision shall be final and binding on the parties but subject to litigation or other legal proceeding.

Delete subparagraph 15.2.6.1 in its entirety.

15.3 MEDIATION

Delete the following Paragraphs: 15.3.1, 15.3.2, and 15.3.3 in their entirety and all other references to Mediation.

15.4 ARBITRATION

Delete the following Paragraphs: 15.4.1, 15.4.1.1, 15.4.2, 15.4.3, 15.4.4, 15.4.4.1, 15.4.4.2, and 15.4.4.3 in their entirety and all other references to arbitration.

ARTICLE 16 - LABOR STANDARDS

16.1 PREVAILING WAGE RATES

16.1.1 Contractor and each Subcontractor shall pay to all laborers, workmen, and mechanics employed in execution of this Contract not less than rates set forth below for each craft or type of workman or mechanic needed to execute Contract.

16.1.2 Determination of prevailing wages shall not be construed to prohibit payment of more than rates names.

16.1.3 Attention of Contractor and all Subcontractors is called to the following laws of Texas relating to labor; (V.T.C.S. Article 5159a, as amended Section 5 of Acts 1973, 63rd Legislature, P. 995, Chapter 399, V.T.C.S. of Texas Article 5165.1 and 5165.3 as amended by Section 5 of Acts 1973, 63rd Legislature, P.995, Chapter 399).

16.2.1 PREVAILING WAGE RATE DETERMINATION INFORMATION

The following information is from Chapter 2258 Texas Government Code Title 10:

2258.021. Duty of Governmental Entity to Pay Prevailing Wage Rates

(a) The state or any political subdivision of the state shall pay a worker employed by it or on behalf of it:
  (1) not less than the general prevailing rate of per diem wages for work of a similar character in the locality in which the work is performed; and
  (2) not less than the general prevailing rate of per diem wages for legal holiday and overtime work.

(b) Subsection (a) does not apply to maintenance work.

(c) A worker is employed on a public work for the purposes of this section if the worker is employed by a contractor or subcontractor in the execution of a contract for the public body of the state or a political subdivision of the state.

2258.023 Prevailing Wage Rates to be Paid by Contractor and Subcontractor; Penalty

(a) The contractor who is awarded a contract by a public body or a subcontractor of the contractor shall pay not less than the rates determined under Section 2258.022 to a worker employed by it in the execution of the contract.

(b) A contractor or subcontractor who violates this section shall pay to the state or a political subdivision of the state on whose behalf the contract is made, $60 for each worker employed for each calendar day or part of the day that the worker is paid less than the wage rates stipulated in the contract. A public body awarding a contract shall specify this penalty in the contract.

(c) A contractor or subcontractor does not violate this section if a public body awarding a contract does not determine the prevailing wage rates and specify the rates in the contract as provided by Section 2258.022.

(d) The public body shall use any money collected under this section to offset the costs incurred in the administration of this chapter.

(e) A municipality is entitled to collect a penalty under this section only if the municipality has a population of more than 10,000.

2258.051 Duty of Public Body to Hear Complaints and Withhold Payment

(1) take cognizance of complaints of all violations of this chapter committed in the execution of the contract; and

(2) withhold money forfeited or required to be withheld under this chapter from the payments to the contractor under the contract, except that the public body may not withhold money from other than the final payment without determination by the public body that there is good cause to believe that the contractor has violated this chapter.

END OF SECTION

Prevailing Wage Rate Determination Information

The following information isfrom Chapter 2258 Texas Government Code:

Sec. 2258.021. Right to be Paid Prevailing Wage Rates.

(a) A worker employed on a public work by or on behalf of the state or a political subdivision of the state shall be paid:
    (1) not less than the general prevailing rate of per diem wages for work of a similar character in the locality in which the work is performed; and
    (2) not less than the general prevailing rate of per diem wages for legal holiday and overtime work.
(b) Subsection (a) does not apply to maintenance work.
(c) A worker is employed on a public work for the purposes of this section if the worker is employed by a contractor or subcontractor in the execution of a contract for the public work with the state, a political subdivision of the state, or any officer or public body of the state or a political subdivision of the state.

Sec. 2258.023. Prevailing Wage Rates to be paid by Contractor and Subcontractor; Penalty.

(a) The contractor who is awarded a contract by a public body or a subcontractor of the contractor shall pay not less than the rates determined under Section 2258.022 to a worker employed by it in the execution of the contract.
(b) A contractor or subcontractor who violates this section shall pay to the state or a political subdivision of the state on whose behalf the contract is made, $60 for each worker employed for each calendar day or part of the day that the worker is paid less than the wage rates stipulated in the contract. A public body awarding a contract shall specify this penalty in the contract.
(c) A contractor or subcontractor does not violate this section if a public body awarding a contract does not determine the prevailing wage rates and specify the rates in the contract as provided by Section 2258.022.
(d) The public body shall use any money collected under this section to offset the costs incurred in the administration of this chapter.
(e) A municipality is entitled to collect a penalty under this section only if the municipality has a population of more than 10,000.

Sec. 2258.051. Duty of Public Body to Hear Complaints and Withhold Payment.

A public body awarding a contract, and an agent or officer of the public body, shall:

(1) take cognizance of complaints of all violations of this chapter committed in the execution of the contract; and
(2) withhold money forfeited or required to be withheld under this chapter from the payments to the contractor under the contract, except that the public body may not withhold money from other than the final payment without a determination by the public body that there is good cause to believe that the contractor has violated this chapter.

Prevailing Wage Rates – School Construction Trades

Effective: June 12, 2019

Texas Gulf Coast Area

CLASSIFICATION	2019 HOURLY RATE
ASBESTOS WORKER	$18.00
BRICKLAYER; MASON	$18.98
CARPENTER; CASEWORKER	$18.90
CARPET LAYER; FLOOR INSTALLER	$19.80
CONCRETE FINISHER	$13.90
DATA COMM/TELE COMM	$22.58
DRYWALL INSTALLER; CEILING INSTALLER	$16.40
ELECTRICIAN	$25.50
ELEVATOR MECHANIC	$31.50
FIREPROOFING INSTALLER	$19.17
GLAZIER	$19.67
HEAVY EQUIPMENT OPERATOR	$21.00
INSULATOR	$14.90
IRONWORKER	$23.00
LABORER, HELPER	$11.75
LATHERER; PLASTERER	$18.60
LIGHT EQUIPMENT OPERATOR	$13.25
METAL BUILDING ASSEMBLER	$16.33
MILLWRIGHT	$26.30
PAINTER; WALL COVERING INSTALLER	$14.67
PIPEFITTER	$25.17
PLUMBER	$31.00
ROOFER	$15.10
SHEET METAL WORKER	$20.25
SPRINKLER FITTER	$20.61
STEEL ERECTOR	$23.33
TERRAZZO WORKER	$16.42
TILE SETTER	$15.30
WATERPROOFER; CAULKER	$14.90

This document was developed in strict accordance with Chapter 2258 of the Texas Government Code.

Prevailing Wage Rates

Worker Classification Definition Sheet

CLASSIFICATION	DEFINITION
ASBESTOS WORKER	Worker who removes and disposes of asbestos materials.
BRICKLAYER; MASON	Craftsman who works with masonry products, stone, brick, block, or anymaterial substituting those materials and accessories.
CARPENTER; CASEWORKER	Worker who build wood structures or structures of any material which has replaces wood. Includes rough and finish carpentry, hardware andtrim.
CARPET LAYER; FLOOR INSTALLER	Worker who installs carpets and/or floor coverings, vinyltile.
CONCRETE FINISHER	Worker who floats, trowels, and finishes concrete.
DATA COMM/TELE COMM	Worker who installs data/telephone and television cable and associate equipment and accessories.
DRYWALL; CEILING INSTALLER	Worker who installs metal framed walls and ceiling, drywall coverings, ceiling grids, and ceilings.
ELECTRICIAN	Skilled craftsman who installs or repairs electrical wiring and devices. Includes fire alarm systems and HVAC electrical controls.
ELEVATOR MECHANIC	Craftsman skilled in the installation and maintenance of elevators.
FIREPROOFING INSTALLER	Worker who sprays or applies fire proofing materials.
GLAZIER	Worker who installs glass, glazing, and glass framing.
HEAVY EQUIPMENT OPERATOR	Includes but not limited to: all CAT tractors, all derrick-powered, all poweroperated cranes, back-hoes, back-fillers, power operated shovels, winch trucks, and all trenching machines.
INSULATOR	Worker who applies, sprays, or installs insulation.
IRONWORKER	Skilled craftsman who erects structural steel framing, and installs structuralconcrete Rebar.
LABORER, HELPER	Worker qualified for only unskilled or semi-skilled work. Lifting, carrying materialsor tools, hauling, digging, clean up.
LATHERER; PLASTERER	Worker who installs metal framing and lath. Worker who applies plaster to lathing and installs associated accessories.
LIGHT EQUIPMENT OPERATOR	Includes but not limited to , air compressors, truck crane drivers, flex planes, building elevators, form graders, concrete mixers less than 14cf), conveyers.
METAL BUILDING ASSEMBLER	Worker who assembles pre-made metal buildings.
MILLWRIGHT	Mechanic specializing in the installation of heavy machinery, conveyance, wrenches, dock levelers, hydraulic lifts, and align pumps.
PAINTER; WALL COVERING INSTALLER	Worker who prepares wall surfaces and applies paint and/or coverings, tape, and bedding.
PIPEFITTER	Trained worker who installs piping systems, chilled water piping and hot water(boiler) piping, pneumatic tubing controls, chillers, boilers, and associated mechanical equipment.
PLUMBER	Skilled craftsman who installs domestic hot and cold water piping, waste piping, storm system piping, water closets, sinks, urinals, and related work.
ROOFER	Worker who installs roofing materials, Bitumen (asphalt and coal tar) felts, flashings, all types of roofing membranes, and associated products.
SHEET METAL WORKER	Worker who installs sheet metal products, Roof metal, flashings and curbs, ductwork, mechanical equipment, and associated metals.
SPRINKLER FITTER	Worker who installs fire sprinklers systems and fire protectant equipment.

CLASSIFICATION	DEFINITION
STEEL ERECTOR	Worker who erects and dismantles structural steel frames of buildings and other structures.
TERRAZZO WORKER	Craftsman who places and finishes Terrazzo.
TILE SETTER	Worker who prepares wall and/or floor surfaces and applies ceramic tiles to these surfaces.
WATERPROOFER; CAULKER	Worker who applies water proofing material to buildings. Products include sealant, caulk, sheet membranes, and liquid membranes, sprayed, rolled or brushed.

SECTION 01 10 00

SUMMARY OF WORK

CONDITIONS OF THE CONTRACT, SUPPLEMENTARY CONDITIONS AND DIVISION 1 APPLY TO THIS SECTION.

PART 1 - GENERAL

1.1 DESCRIPTION

A. Project Location:

Amelia Elementary School
555 Major Drive
Beaumont, TX 77707

Beaumont United High School - Fieldhouse
3443 Fannett Road
Beaumont, TX 77705

Bingman Head Start
5265 Kenneth Avenue
Beaumont, TX 77705

Fletcher Elementary School
1055 Avenue F
Beaumont, TX 77701

Jones Clark Elementary School
3525 Cleveland Street
Beaumont, TX 77703

Marshall Middle School
6455 Gladys Avenue
Beaumont, TX 77706

Paul Brown Learning Center
3395 Harrison Avenue
Beaumont, TX 77706

Smith Middle School
4415 Concord Drive
Beaumont, TX 77703

South Park Middle School
4500 Highland Avenue
Beaumont, TX 77705

West Brook High School
8750 Phelan Boulevard
Beaumont, TX 77706

B. The Project scope varies and includes the replacement of existing air-cooled chillers with new.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Materials for the project scope of work are described on the Drawings and included in other sections of the Specifications.

PART 3 - EXECUTION

3.1 SCHEDULE

A. Completion Time: The Owner has a critical need for the entire project to be completed within the period with on-site Work on the project can commence on Notice to Proceed and the substantial completion date is **March 3, 2023.**

B. Proposers shall structure their pricing and proposal as required to meet the designated schedule.

C. Submission of a proposal for consideration shall be construed as proposer's agreement to meet the stipulated schedule without qualification or exclusion.

END OF SECTION

SECTION 01 21 00

ALLOWANCES

CONDITIONS OF THE CONTRACT, SUPPLEMENTARY CONDITIONS AND DIVISION 1 APPLY TO THIS SECTION.

PART 1 - GENERAL

1.1 DESCRIPTION

The following Allowances shall be included in the Base Proposal. These sums shall be reconciled per Article 3.8 of the General Conditions.

1.2 CONDITIONS

A. The Contractor shall include in the Contract Sum all allowances stated in the Contract Documents. These allowances shall cover the net cost of the materials and equipment delivered and unloaded at the site, and all applicable taxes.

The Contractor's handling costs on site, labor, installation, overhead, profit and other expenses contemplated for the original allowance shall be included in the Contractor's Base Proposal sum, and not in the allowance.

The Contractor shall cause the work covered by these allowances to be performed for such amounts and by such persons as the Engineer may direct, but he will not be required to employ persons against whom he makes reasonable objection.

If the cost, when determined, is more than or less than the allowance, the Contract sum shall be adjusted accordingly by Change Order, which will include additional handling costs on the site, labor, installation costs, overhead, profit and other expenses resulting to the Contractor from any increase over the original allowance.

a) All labor, equipment and installation required for the installation and / or performance of the designated work shall be included in the allowance amount, unless noted otherwise in the Allowance description.

B. Unexpended balance of allowance sums shall revert to the Owner in the final settlement Change Order of the Contract.

PART 2 - ALLOWANCES

2.1 ITEMS

A. Owner Contingency:
Contractor shall include in the Base Proposal the following sums as a contingency to cover the cost of hidden, concealed or otherwise unforeseen conditions which develop during completion of the work. Contractor shall proceed with the work in question only after receiving written directions executed by the Owner and the Engineer. Owner will not be obligated to pay the cost of any work performed without prior written authorization. The Contractor's overhead and profit relative to this contingency sum and work performed in accordance herewith, shall be included in the total Base Proposal price, but not included in the contingency sum. Unexpended balance of contingency sums shall revert to the Owner in the final settlement of the Contract.

Allow the sum of $200,000.00 for Owner’s Contingency $200,000.00

END OF SECTION

SECTION 01 23 00

ALTERNATES

PART 1 - GENERAL

1.1 SUMMARY

A. Requirements Included:
   1. Identification and description of alternate work.

B. Related Requirements:
   1. Proposal Form
   2. Contract Form
   3. Specifications Sections identified in each alternate.

1.2 PROCEDURES

A. Proposers are required to submit alternate amounts to add work or to deduct work from the Base Proposal as described below. Failure to submit alternate amounts in spaces provided on Proposal Form will be basis for disqualification of proposal.

B. The successful proposer may not modify, withdraw, or cancel any Alternate Proposal or any part thereof for 30 days after date of receipt of proposals, unless specifically noted otherwise.

C. Contractor will be responsible for all changes in the Work affected by acceptance of Alternates. Claims for additional costs or time extensions resulting from changes to the Work as a result of the Owner's election of any or all alternates will not be allowed.

D. Refer to the Drawings and Specifications for items of work affected by Alternates.

E. Election of Alternates will be exercised at the option of Owner.

F. Coordinate related work and modify or adjust surrounding work as required to complete the Work included under each alternate.
   1. Include as part of each Alternate, miscellaneous devices, accessory objects and similar items incidental to or required for, a complete installation whether or not indicated as part of Alternate.
   2. Cost listed for each Alternate includes cost of related coordination, modification, or adjustment.

G. Notification: Immediately following award of the Contract, prepare and distribute to each entity or person to be involved in the performance of the Work, a notification of the status of each proposed Alternate. Indicate whether Alternates have been accepted, rejected, or deferred for later consideration. Include a complete description of negotiated modifications to Alternates, if any.

1.3 SELECTION AND AWARD OF ALTERNATES

A. Indicate change to the Base Proposal amount as a result of prices for the Alternates described below and listed on the Proposal Form, or any supplement to it, by adding to or deducting from the Base Proposal amount or by indicating " No Change."

B. Indicating "No Proposal" as an Alternate is unacceptable and is reason for rejection of the entire proposal.

1.4 SCHEDULE OF ALTERNATES

A. ALTERNATE NO. 1A:

This alternate shall establish the amount to be added to the base proposal for the contractor to furnish and install Air Cooled Chillers as manufactured by **Carrier** and as shown on the drawings and listed in the specifications. There are no Air-Cooled Chillers provided under the Base Proposal.

B. ALTERNATE NO. 1B:

This alternate shall establish the amount to be added to the base proposal for the contractor to furnish Manufacturer Extended Parts, Labor and Refrigerant Warranty for years 6-10 for the **Carrier** Chillers.

C. ALTERNATE NO. 2A:

This alternate shall establish the amount to be added to the base proposal for the contractor to furnish and install Air Cooled Chillers as manufactured by **Daikin** and as shown on the drawings and listed in the specifications. There are no Air-Cooled Chillers provided under the Base Proposal.

D. ALTERNATE NO. 2B:

This alternate shall establish the amount to be added to the base proposal for the contractor to furnish Manufacturer Extended Parts, Labor and Refrigerant Warranty for years 6-10 for the **Daikin** Chillers.

E. ALTERNATE NO. 3A:

This alternate shall establish the amount to be added to the base proposal for the contractor to furnish and install Air Cooled Chillers as manufactured by **Trane** and as shown on the drawings and listed in the specifications. There are no Air-Cooled Chillers provided under the Base Proposal.

F. ALTERNATE NO. 3B:

This alternate shall establish the amount to be added to the base proposal for the contractor to furnish Manufacturer Extended Parts, Labor and Refrigerant Warranty for years 6-10 for the **Trane** Chillers.

PART 2 – PRODUCTS – NOT USED

PART 3 – EXECUTION – NOT USED

END OF SECTION

SECTION 01 29 00

PAYMENT PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
1. Applications and Certificates for Payment.
2. Change Order Procedures.
3. Schedule of Values

B. Related Requirements:
1. Document 00 61 27 - General Conditions of the Contract for Construction
2. Document 00 73 00 - Supplementary Conditions to the Contract for Construction
3. Section 01 32 16 - Construction Progress Schedules
4. Section 01 77 00 - Closeout Procedures

1.2 APPLICATIONS AND CERTIFICATES FOR PAYMENT

A. Progress payments will be made as the work proceeds, at intervals stated in the Contract.

B. Work covered by progress payments, including items in off-site storage, become the property of the Owner at the time of payment.

C. Form of Application and Certificate for Payment: Notarized AIA Document G702 - *Application and Certification for Payment*, supported by AIA Document G703 - *Continuation Sheet*. Originals only, two copies.

D. Conditions governing regular schedule for applications, payment and retainage are stated in the Contract.

E. With each Application for Payment, certify that such Application for Payment represents a just estimate of cost reimbursable under terms of Contract.

1.3 CONSTRUCTION CHANGE ORDER PROCEDURES

A. Submit to Engineer within 5 days of date of Owner/Contractor Agreement, the individual’s name authorized to accept changes on behalf of Contractor, and to be responsible for informing others in Contractor's employ of changes in the work.

B. Change Order forms will be furnished and issued by Engineer.

C. Contractor Documentation of Changes:
1. Maintain detailed records of work done on an accounting basis acceptable to Engineer and Owner. Provide full information required for evaluation of proposed changes.
2. Document each quotation for a change in cost or time with sufficient data to allow evaluation of quotation.
3. On request, provide additional data to support computations:
a. Quantities of products, labor and equipment.
b. Insurance and bonds.
c. Overhead and profit.
d. Justification for any change in Contract Time.
e. Credit for deletions from Contract, similarly documented.
4. Support each request for additional costs, and for work proposed on a time and material

basis, with description of products, equipment, cost of labor and subcontracts, completely documented.

5. Values for changes in work will be computed according to the Conditions of the Contract.

D. Initiation of Changes:

1. Engineer may submit a Proposal Request including a detailed description of the proposed changes along with revised or supplementary drawings and specifications.
2. Contractor may initiate a proposed change by submitting a request to Engineer describing the proposed change along with a statement of reason for change, proposed effect on Contract Sum and Contract Time, related back-up documentation, and a statement of the effect on work of separate contractors. Document requested substitutions according to Section 01 62 00 - *Product Options*. Submittal of such requests and receipt of same by Engineer does not ensure acceptance or approval of proposed change.

E. Authorization:

1. The Owner may request, through the Engineer, a written Construction Change Directive instructing Contractor to proceed with changes of all or part of the Work, for inclusion in a subsequent Change Order. Directive will include the basis for necessary adjustments, if any, to Contract Sum and Time.
2. Changes that affect Contract Sum and/or Contract Time will require a Change Order signed by the Owner and the Engineer. Contractor's signature will indicate agreement. Other orders, written or oral, by the Owner through the Engineer or by the Engineer will be treated as a Change Order only if Contractor provides proper written notice as described in the *Conditions of the Contract*.
3. Promptly execute the change in work only upon receipt of an approved Change Order or Owner's written Construction Change Directive.

F. Execution:

1. Engineer will issue Change Orders for signatures of parties as provided in *Conditions of the Contract.*
2. Promptly revise *Schedule of Values* and *Application for Payment* forms to record each authorized Change Order as a separate line item and adjust Contract Sum as shown on Change Order.
3. Promptly revise *Progress Schedules* to reflect change in Contract Time, revise sub-schedules to adjust times for other items of work affected by Change, and resubmit Schedule.
4. Promptly enter Changes in *Project Record Documents*.

1.4 SCHEDULE OF VALUES FORM AND CONTENT

A. Type schedule on 8-1/2 x 11-inch white paper; Contractor's standard forms and automated printout will be considered for approval by Engineer upon request. Identify schedule with:

1. Title of project and location.
2. Engineer and Engineer's project number.
3. Name and address of Contractor.
4. Contract designation.
5. Date of submission.

B. Follow the Table of Contents of this Project Manual as the format for listing component items. Identify each line item with the number and title of the respective major section of the Specifications.

C. For each major line item list sub-values of major products or operations under the item.

D. For the various portions of the work:

1. Each item shall include a directly proportional amount of the Contractor's overhead and profit.
2. If progress payments will be requested for stored materials, break down the value into:
   a. Cost of the materials, delivered and unloaded, with taxes paid.
   b. Total installed value.
3. Submit a sub-schedule for each separate stage of work in Section 01 11 00 - *Summary of Work*.

E. The sum of values listed in the schedule shall equal the total Contract Sum.

F. Indicate separate value associated with materials and labor.

G. Re-submittal: After review by Engineer, revise and resubmit schedule until approved.

PART 2 - PRODUCTS - Not used

PART 3 - EXECUTION - Not used

END OF SECTION

SECTION 01 29 73

SCHEDULE OF VALUES

CONDITIONS OF THE CONTRACT, SUPPLEMENTARY CONDITIONS AND DIVISION 1 APPLY TO THIS SECTION.

PART 1 - GENERAL

1.1 DESCRIPTION

A. Refer to Instructions to Proposers for substitutions.

B. Work Included: Provide a detailed breakdown of the agreed Contract Sum showing values allocated to each of the various parts of the work, as specified herein and in other provisions of the Contract Documents.

C. Related Work:
1. Documents affecting work of this section include, but are not necessarily limited to, General Conditions, Supplementary Conditions, and Sections in Division 1 of these Specifications.

1.2 QUALITY ASSURANCE

A. Use required means to assure arithmetical accuracy of the sums described. When so required by the Engineer, provide copies of the subcontracts or other data acceptable to the Engineer, substantiating the sums described.

B. The Schedule of Values shall be broken down into costs for each specification section as labor and materials at a minimum.
1. The contractor is encouraged to make the schedule of values very detailed in order to facilitate review and approval of requested percentages complete on pay applications.
2. Where breakdown is vague, or includes multiple / combined assemblies, stages, tasks, etc., Engineer's review shall be conservative in favor of the Owner regarding approval of Pay Applications.

1.3 APPLICATION FOR PAYMENT SCHEDULE OF VALUES

A. The schedule of values, once approved shall be transferred to columns B and C of AIA G702/G703 – Application for Payment to be used for all progress payments.

B. Once AIA G702/G703 – Application for Payment has been submitted for payment, individual line item amounts in column C must remain unchanged throughout the progress of the work.

C. In the beginning stages of the construction, total amounts for entire divisions may be used if complete breakdowns are not available; and shall be line item populated as soon as practical.

D. No payments will be approved in divisions that do not have a line item breakdown.

E. Allowances shall be shown, and remain throughout construction, as a single line item on the master application for payment in amount(s) as stipulated in the Contract Documents.

F. For each Allowance, expenditures and accounting shall be included on a separate, attached spread sheet of the same format as the master application for payment.

G. The master application for payment shall reflect only the summary of each allowance; and shall not contain individual allowance activity(s).

1.4 MULTIPLE PHASES / BUILDINGS

A. For projects consisting of multiple phases, separate each phase on the Application for Payment and include separate division 2 through 32 line items for each phase.

B. For projects consisting of multiple buildings, separate each building on the Application for Payment and include separate division 2 through 32 line items for each building.

1.5 SUBMITTALS

A. Prior to the first Application for Payment, submit a proposed schedule of values to the Engineer, as outlined below.

B. Meet with the Engineer and determine additional data, if any, is required to be submitted.

C. Secure the Engineer's approval of the schedule of values prior to submitting the first Application for Payment.

PART 2 - PRODUCTS

2.1 SCHEDULE OF VALUES

A. Schedule of values for Division 2 through 32 shall be broken down for each separate section of work, and include multiple items covered where appropriate.
   01 Each item of work shall be broken down by material and labor at a minimum.
   02 Where payment for shop drawings, submittals, record drawings and similar are expected, the items must be included as a separate item on the schedule of values.

END OF SECTION

SECTION 01 31 00

PROJECT MANAGEMENT AND COORDINATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Coordination of work of the Contract.

B. Related Sections:
   1. Section 01 10 00 - Summary of Work
   2. Section 01 31 19 - Project Meetings
   3. Section 01 77 00 - Closeout Procedures

1.2 DESCRIPTION

A. Coordinate scheduling, submittals, and work of the various sections of specifications to assure efficient and orderly sequence of installation of construction elements, with provisions for accommodating items to be installed later.

B. Coordinate sequence of work to accommodate early Owner occupancy as specified in Section 01 11 00 - *Summary of Work*.

1.3 MEETINGS

A. In addition to progress meetings specified in Section 01 31 19 - *Project Meetings*, conduct coordination meetings and pre-installation conferences with applicable personnel and affected subcontractors to assure proper coordination of work.

1.4 COORDINATION OF SUBMITTALS

A. Schedule and coordinate submittals specified in Section 01 33 23 - *Shop Drawings, Product Data and Samples.*

B. Coordinate work of various trades having interdependent responsibilities for equipment, such as installing, connecting to and placing in service.

C. Coordinate requests for substitutions to assure compatibility of space, of operating elements and effect on work of other sections.

1.5 COORDINATION OF SPACE

A. Mechanical and electrical work is diagrammatically shown on the Drawings. Coordinate use of project space and sequence of installation. Follow routings shown for pipes, ducts and conduits as closely as practicable, with due allowance for available physical space. Install ductwork, conduit, and plumbing lines parallel to building lines. Efficiently utilize available space to maximize accessibility for other trade's installations, and for maintenance and repairs.

B. In finished areas, except as otherwise shown, conceal pipes, ducts and wiring within the construction. Coordinate locations of fixtures and outlets with finish elements.

1.6 COORDINATION OF CONTRACT CLOSEOUT

A. Coordinate completion and cleanup of the Project Site in preparation for substantial completion of portions of work designated for Owner partial occupancy.

B. After early Owner occupancy of premises, coordinate access to site by construction personnel for correction of defective work and work not in compliance with the Contract Documents, and to minimize disruption of Owner's activities.

C. Assemble and coordinate closeout submittals specified in Section 01 77 00 - *Closeout Procedures*.

PART 2 - PRODUCTS – NOT USED

PART 3 – EXECUTION – NOT USED

END OF SECTION

SECTION 01 31 19

PROJECT MEETINGS

CONDITIONS OF THE CONTRACT, SUPPLEMENTARY CONDITIONS AND DIVISION 1 APPLY TO THIS SECTION.

PART 1 - GENERAL

1.1 DESCRIPTION

A. Refer to Instructions to Proposers for substitutions.

B. Scope of Work:
   01 Contractor participation in preconstruction conference.
   02 Contractor administration of pre-installation conferences.
   03 Contractor administration of progress meetings

1.2 PRECONSTRUCTION CONFERENCE

A. Engineer will administer preconstruction conference for execution of Owner-Contractor Agreement, and exchange preliminary submittals.

B. Engineer will administer site mobilization conference at project site for clarification of Owner and Contractor responsibilities, in use of site and for review of administration procedures.

1.3 PRE-INSTALLATION CONFERENCES

A. Contractor shall convene pre-installation conferences with each sub-contractor prior to commencing work of the sub-contractor.
   01 Contractor shall record attendance on a sign-in sheet.
   02 Contractor shall keep minutes of the conference and distribute to all attending parties prior to the start of the work.

B. The purpose of the meeting is to fully review subcontractor's work to assure initial installation will be in accordance with the Contract Documents. The agenda shall include, but not necessarily limited to the following:
   01 Review the contract documents, including any changes thereto.
   02 Review all RFI's that may affect the work.
   03 Review the final reviewed submittals, including AE and Contractor comments.
   04 Review conditions of installation, preparation and installation procedures.
   05 Review coordination with related / interfacing work.
   06 It is the responsibility of the contractor / sub-contractor to resolve all unknown issues, unclear issues, coordination issues, and assembly interface issues in order to comply with the requirements of the Contract Documents.

C. Require attendance includes, but is not limited to the following:
   01 Contractor's superintendent
   02 Engineer's field representative
   03 Relative sub-contractor
   04 Sub-contractors providing adjacent and / or interfacing work.
   05 Other sub-contractors whose work may be affected by the relative sub-contractor.

D. Pre-installation conferences shall be scheduled a minimum of 48 hours in advance of the start of relative work unless otherwise agreed to by all parties.

E. Pre-installation conferences may be scheduled with multiple sub-contractors at the same time to facilitate awareness of related work. Coordinate with Engineer's field rep.

F. The contractor shall keep meeting minutes and distribute to all attendees within three days after the meeting; or sooner if required to facilitate project scheduling.

1.4 PROGRESS MEETINGS

A. Contractor shall schedule and administer all project meetings after mobilization conference throughout progress of the work at bi-weekly intervals, plus any special called meetings, and all preinstallation conferences.

B. Contractor shall make physical arrangements for meetings, preside at meetings, record minutes, and distribute copies of minutes within two days to attendees, and those affected by decisions made at meetings.

C. Required Attendance:
01 Contractor's Superintendent
02 Contractor's Project Manager
03 Engineer's Project Manager
04 Engineer's Field Representative
05 Engineer's Consultants as appropriate to agenda topics for each meeting.
06 Owner's Representative.

D. The primary purpose of the weekly progress meetings is to update the Owner of the project status, progress, schedule and outstanding issues. It shall not be a venue for resolving issues that can otherwise be resolved between the Contractor and Engineer / consultants; unless direct input from the Owner is required.
01 In as much as practical, meetings shall be scheduled on the same day and time each week. Changes in the normal schedule must be agreed to by all parties.

E. Required Agenda Items:
01 Review work completed since the previous meeting.
02 Review status of progress schedule and adjustments thereto, and delivery schedules.
03 Review submittal log,
04 Review change proposal log, minor changes and other adjustments to the Work
05 Review pending changes and substitutions.
06 Review AE construction observation reports and resolutions to outstanding issues
07 Review as-built documents and close-out progress,
08 Discuss other items affecting progress of work.
09 New business

1.5 PROGRESS MEETING MINUTES

A. Progress meeting minutes shall be furnished by the Contractor and shall be structured to identify all discussion topics and action items by the initiating meeting and the eventual outcome / decisions made relative to each issue.

B. Meeting minutes shall be produced in a form acceptable to the Engineer. Coordinate as required.

C. Each meeting with unresolved information or pending action items shall remain on the meeting minutes, in the above format, through one meeting beyond resolution or completion of the pending action of the item, where the item can be reviewed one more time and ALL parties agree the item can be removed from the meeting minutes.

D. The last meeting shown on the meeting minutes shall relate to the most recent meeting held and shall include ALL topics of discussion at that meeting.

E. Up-to-date meeting minutes shall be furnished to all attendees at the beginning of each meeting.

END OF SECTION

SECTION 01 31 20

PRE-CONSTRUCTION MEETING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Participation in preconstruction meeting.

B. Related Requirements:
   1. Section 01 10 00 - Summary of Work
   2. Section 01 31 00 - Project Management and Coordination
   3. Section 01 31 19 - Project Meetings

1.2 PRECONSTRUCTION MEETING

A. Engineer will schedule a preconstruction meeting within 15 days after Notice of Contract Award.

B. Attendance: Owner, Engineer and Consultants, General Contractor, and representatives of major subcontractors and Suppliers.

C. Minimum Agenda
   1. Submittal of executed bonds and insurance certificates
   2. Execution of Owner-Contractor Agreement
   3. Distribution of Contract Documents
   4. Submittal of list of subcontractors, list of products, schedule of values and progress schedule
   5. Designation of responsible personnel
   6. Procedures and processing of field decisions, submittals, substitutions, applications for payments, proposal requests, change orders, allowances and Contract closeout procedures
   7. Scheduling
   8. Use of premises by Owner and Contractor
   9. Owner's requirements and occupancy
   10. Temporary facilities
   11. Survey and building layout
   12. Security and housekeeping procedures
   13. Procedures for testing
   14. Procedures for maintaining record documents
   15. Requirements for startup of equipment
   16. Accessibility Issues
   17. Inspection and acceptance of equipment put into service during construction period
   18. Notice to proceed
   19. Color samples
   20. Procedures for site meetings
   21. Site access and security
   22. Substantial and final project completion procedures

PART 2 – PRODUCTS - Not Used

PART 3 – EXECUTION - Not Used

END OF SECTION

SECTION 01 32 16

CONSTRUCTION PROGRESS SCHEDULE

CONDITIONS OF THE CONTRACT, SUPPLEMENTARY CONDITIONS AND DIVISION 1 APPLY TO THIS SECTION.

PART 1 - GENERAL

1.1 DESCRIPTION

A. Refer to Instructions to Proposers for substitutions.

B. Scope of Work: This section establishes requirements of Contractor to produce and maintain a construction schedule throughout the progress of work; as well as, Owner imposed limitations on the construction schedule.

1.2 SUBMITTALS

A. Construction schedules shall be produced using a critical path method, linking associated tasks and their impact on interfacing / subsequent work.
   01 Provide (separate) schedules for each campus.
   02 Provide schedule in as much detail as practical to accurately monitor progress of the work and adherence to the schedule.
   03 Provide in both text and graphic formats.

B. Preliminary Construction Schedule: Within one (1) weeks after receipt of Notice to Proceed, submit a preliminary construction schedule for review.

C. Construction Schedule: Within two (2) weeks after receipt of Notice to Proceed, submit one reproducible and four prints of the construction schedule.

D. Throughout the progress of the Work, provide / submit updated progress schedules at each regularly scheduled site progress meetings.

1.3 RELIANCE UPON SCHEDULE

A. The construction schedule will be an integral part of the Contract, and will establish conditions for various activities and phases of construction.

B. The Owner, Engineer and Engineer’s Consultant shall rely on the schedule to perform related and interfacing activities.

C. Whenever the progress of the Work falls behind two weeks or more, the Contractor shall adjust the schedule accordingly to demonstrate how progress shall be adjusted to get back on the original schedule.

PART 2 - PRODUCTS

2.1 CONSTRUCTION SCHEDULE

A. Diagram: Graphically show the order of all activities necessary to complete the work and the sequence in which each activity is to be accomplished.

B. Activities shown on the diagram shall include, but not necessarily be limited to:
   01 Project mobilization.
   02 Submittals and approvals of shop drawings and samples.
   03 Phasing of construction.
   04 Procurement of equipment and critical materials.
   05 Fabrication and installation of materials and equipment.
   06 Final clean-up.
   07 Final inspection and testing.

C. Accurately track and incorporate delays caused by inclement weather and factors outside the Contractor's control.

D. Provide updated schedules at each regularly scheduled site progress meeting.

2.2 CONSTRUCTION SCHEDULE LIMITATIONS

A. Work performed under this Contract shall be performed in accordance with the following paragraphs so that the Owner can accept the project as substantially complete as noted below.

B. When the Owner-Contractor Agreement stipulates a guaranteed completion date, the Contractor shall use all means necessary to assure adequate progress of the Work to achieve the contracted Substantial Completion date.

C. At no time can Work disable any critical features, systems or functions of a campus without the approval of the Owner. Coordinate as required.

END OF SECTION

SECTION 01 33 00

SUBMITTAL PROCEDURES

CONDITIONS OF THE CONTRACT, SUPPLEMENTARY CONDITIONS AND DIVISION 1 APPLY TO THIS SECTION

PART 1 - GENERAL

1.1 DESCRIPTION

A. Refer to Instructions to Proposers for substitutions.

1.2 QUALITY ASSURANCE

A. It is the sole responsibility of the Contractor / sub-contractor / material supplier to provide materials and work that conforms to the requirements of the Contract Documents.

B. The function of the submittal process is to provide the Contractor / sub-contractor / material supplier additional review / quality control of the materials / work proposed to be furnished for the Work.

C. Prior to delivery to the Engineer or Consultant, each submittal shall be thoroughly reviewed by the party / sub-contractor generating the submittal, as well as the General Contractor.
   01 Each reviewer shall document their review by affixing a stamp and signature, or a signed review cover sheet to each submittal. General contractor sign-off for the submittal originator is not acceptable.
   02 All corrections shall be clearly noted.
   03 The Contractor shall determine whether the submittals are suitable to forward to the Engineer / Consultant, or return to the originator for revisions and re-submittal.
   04 Submittals which do not display (at least) two prior, separate reviews (submitter and general contractor) shall be rejected and returned to the general contractor.

D. The Engineer's / Consultant's review of submittals is only for review of the general conformance with the design concept of the project and general compliance with the information given in the Contract Documents.
   01 The Engineer's / Consultant's review of submittals shall NOT be construed as approval of the products, assemblies or work being submitted, unless specifically stated as such.
   02 The Engineer / Consultant shall not field verify any information requested on the submittal. That is the responsibility of the Contractor.

E. Submit only what is proposed to be furnished. Where cut-sheets, etc. also contain information on items not to be furnished, clearly indicate / identify / separate the specific items proposed to be furnished from those which are not proposed to be furnished.
   01 Where no such indication is made, it shall be understood the submittal is presenting options to be selected by the Engineer / Consultant at no additional cost to the Owner.

F. Submittals shall be rejected by the Engineer / Consultant for any of the following:
   01 Lack of required review stamps / cover sheets.
   02 Apparent / obvious lack of review by the general contractor or original provider / subcontractor.
   03 An inordinate amount of revisions already noted by the general contractor / sub-contractor.
   04 Incomplete or missing information.
   05 Inclusion of other items not proposed to be furnished.

G. The Contract Documents in electronic format may be made available to the contractor / sub-contractor for their use, provided the users execute a release form to the Engineer / Consultant.

H. All submittals shall be submitted with a cover sheet containing the following information:
   01 Contractor's submittals number
   02 Date of submission and dates of any previous submissions
   03 Project title and Engineer's project number
   04 Relative specification section number
   05 Names of Contractor, subcontractor, supplier, and / or manufacturer.
   06 Signed and dated review stamp or comment sheet from the party / sub-contractor generating the submittal
   07 Signed and dated review stamp or comment sheet from the General Contractor.

I. Each submittal shall contain an identification numbered and specific written title. The identification number shall be in the following format and sequence:
   01 Begin with the relevant specification section number (i.e. 042000).
   02 Follow with a two-digit identifier indicating the first, second, etc. submittal for that particular section (i.e. 042000-01).
   03 The written title shall specifically identify the submittal information (i.e. 042000-01 – Masonry Reinforcement). General descriptors shall not be accepted unless they clearly identify the submittal information.

J. Resubmission Requirements:
   01 Make any corrections or changes in the submittals required by the Engineer or Consultant and resubmit until reviewed without rejection or direction for re-submittal.
   02 Clearly indicate the re-submittal by a capital "R" suffix to the submittal number (i.e. original submittal: 042000-01, first re-submittal: 042000-01-R-01, 042000-01-R-02, etc.).

K. Failure to comply with the quality assurance requirements may result in immediate rejection without review of the submittal. In such circumstances, no additional time shall be granted to the Contractor for resultant delays.

PART 2 - PRODUCTS

2.1 ELECTRONIC DELIVERY

A. Electronic delivery of paper submittals in 11x17 or smaller size in PDF format is required. Delivery of larger size submittals in electronic format is encouraged, but optional to the General Contractor.
   01 Provide a single, electronic copy of submittals with all previous review comments / mark-ups via email or other electronic means to the Engineer / Consultant.
   02 Submittals shall be returned electronically to the General Contractor along with review comments sheets / mark-ups.
   03 Quantities retained and distributed shall be the responsibility of each party (i.e. Contractor, Engineer and / or Consultant).

B. Electronic submittals in PDF format shall be made in the same format (size) of the actual submittal (i.e. 8-1/2x11, 11x17, 24x36, and / or 30x42).

C. The following are exceptions to the above and shall be submitted in electronic and hard copy:
   01 Bound MEP manuals / submittals in excess of 25 pages. Submit the number to be returned plus three (3) copies to be retained by the Engineer and consultant.

2.2 HARD COPY DELIVERY

A. Owner's Record Set of Submittals

01 The contractor shall maintain a separate set of all final submittals to be delivered to the Owner at project close-out.
02 Submittals shall be organized, in order, by spec section.

2.3 MANUFACTURER'S PRODUCT DATA

A. Manufacturer's Product Data: Submit manufacturer's complete printed data on each product; including, but not necessarily limited to product cut-sheets, specifications, quality references, MSDS sheets, and general information, as necessary to demonstrate compliance with all specified requirements

B. Manufacturer's Installation Instructions:
01 When work is specified to comply with manufacturer's printed installation instructions, submit copies of such instructions, including all requirements as they specifically relates to the work required in this Contract.
02 Submission of generic details that do not depict actual conditions of this project shall be rejected.
03 Contractor shall distribute copies to all parties providing interfacing work to the completed installation / assembly.

2.4 SHOP DRAWINGS

A. Shop drawings shall be submitted with sufficient detail to fully describe the work included. Partial sets, if submitted without prior approval from the Engineer, shall be subject to rejection and / or holding until subsequent shop drawings are submitted.

B. Details included in shop drawings shall depict actual project conditions related to the assembly. Details depicting generic substrates or interfacing work shall be subject to rejection.

C. All dimensions indicated on the drawings are based on the specific models and manufacturers of products, equipment, fixtures and miscellaneous items specified or used as a design basis.
01 If the Contractor uses an approved product by another listed manufacturer which is different than the specific model and manufacturer listed in these specifications, the Contractor shall be solely responsible for the coordination of any dimensional changes required, including structural, relocation of walls, equipment, fixtures, ceilings and miscellaneous items – all subject to approval by the Engineer.
02 When dimensional changes are required in these situations, the Contractor shall submit a proposed modification drawing to the Engineer for approval prior to proceeding with the work. All causes and effects of the dimensional change shall be indicated on the Contractor's drawing submittal.

2.5 SAMPLES

A. Finish Samples: Submit full range of manufacturer's standard colors, textures, and patterns for Engineer's selection.
01 Submit samples for selection of finishes in accordance with approved schedule, and in such sequence as to cause no delay in the work or in the work of any other Contractor.
02 Prior to submission of samples, provide all relative information to the Engineer, including but not limited to manufacturer, model no. , series, patterns, colors, etc. necessary to fully describe materials proposed to be furnished. At Engineer's option sample submittals may be waived if Engineer already has samples of proposed materials in the interiors library. Coordinate with Engineer as required.

B. Selection of finishes from paper or digital representations shall not be accepted. Samples requiring selection of a color, pattern or similar finish shall be submitted in one of the following methods:

01 Whenever possible, submit actual material product samples (i.e. carpet, aluminum, glass, plastic laminate, sealants, etc.)
02 Paint colors for pre-finished materials shall be submitted on actual samples of substrate materials (i.e. paint on sheetmetal).
03 Manufacturer's standard color wheels or similar shall be acceptable for paint selections for field painted items; however, the Engineer may require to see / approve an actual application of paint on the intended material in the field.

C. Submit samples to illustrate functional characteristics of the product, with integral parts and attachment devices. Coordinate submittal of different categories for interfacing work.

D. Submittals shall contain:
01 Date of submission and dates of any previous submissions
02 Project title and number
03 Contract identification
04 Names of Contractor, Supplier, Manufacturer
05 Identification of sample, with specification section number

E. Resubmission Requirements for Samples:
01 Make any corrections or changes in the submittals required by the Engineer and resubmit until approved.
02 Submit new samples as required for initial submittal.

F. Submit a minimum of two samples and more if specified in the respective Specification section; one will be retained by Engineer. Reviewed samples may be used in the work if so indicated in the specification section.

G. Selection of materials, finishes and color selections shall be finalized ONLY after samples of all key items are received. Color selections of key items shall NOT be done piece meal.

2.6 MANUFACTURER'S CERTIFICATIONS AND WARRANTIES

A. Manufacturer's Test Reports and Certifications: Where applicable, submit test reports and certifications demonstrating compliance with the referenced standards and requirements.

B. Prior, and conditional to Contract Close-Out, provide original copies of all required certificates, warranties and guarantees. Refer to other sections for specific requirements.

C. Submit required certificates and warranties with original signatures. Documents shall be accompanied by the name of the manufacturer / guarantor, contact name, address, email address, phone number and fax number.

PART 3 – EXECUTION

3.1 SUBMITTAL COORDINATION

A. Group or package submittals relative to the assembly which are dependent upon each other for a thorough review (i.e. doors, frames and hardware).
01 Time periods for proper and complete submittal reviews which are contingent on or must be coordinated with separate but related submittals shall begin at the time of the Engineer's / Consultant's receipt of the last required submittal. Contractors are urged to group submittals appropriately in this regard.

B. Finishes and samples shall NOT be selected piecemeal. Selection of finish samples will begin only after receipt of all finish selection samples, including exterior and interior finishes.

C. No extensions of Contractor Time or Cost shall be allowed due to lack of submittal coordination by the Contractor.

3.2 SCHEDULE

A. The Contractor shall schedule to complete the submittal process within a timeframe he establishes to achieve Substantial Completion of the entire Project on or before the stipulated completion date.

B. The Contractor shall formulate and provide a submittal schedule to the Engineer within fourteen (14) days after execution of the Owner – Contractor Agreement, to allow for proper coordination and scheduling reviews.

C. In formulating the submittal schedule, the Contractor shall allow the following review periods:
   01 Engineer – allow fourteen (14) calendar days response time, after Engineer's receipt, for all submittals made to and reviewed by the Engineer.
   02 Engineer's Consultant – Allow twenty (20) calendar days response time, after Consultant's receipt, for all submittals which must be reviewed by Engineer's Consultants.
   03 All Consultant submittals shall be returned to the Engineer for delivery to the Contractor.

3.3 PROCEDURES

A. Transmit each item with approved form identifying project, contractor, subcontractor, major supplier; identify pertinent drawing sheet and detail number and specification section number, as appropriate.

B. Transmit Consultant submittals directly to respective Consultant with a copy sent to the Engineer.

C. Sub-Contractor's / Supplier's Conveyance to the General Contractor: Each sub-contractor / supplier shall be required to review their own submittal and apply a signed and dated stamp certifying review, verification of products, field dimensions, adjacent construction work and coordination of information is in accordance with the requirements of the work and Contract Documents.
   01 Submittals forwarded to the Engineer / Consultant without the sub-contractor / supplier review stamp shall be automatically rejected without review and returned to the General Contractor.

D. Contractor's Conveyance to the Engineer / Consultant: The Contractor is required to thoroughly review and check all submittals received from sub-contractors / suppliers.
   01 Upon completion of review and checking, apply signed Contractor's stamp to each item submitted, certifying that review, verification of products, field dimensions, adjacent construction work and coordination of information is in accordance with the requirements of the work and Contract Documents.
   02 Submittals forwarded to the Engineer / Consultant without the Contractor's review stamp shall be automatically rejected without review and returned to the Contractor.

E. If, in the opinion of the Engineer / Consultant, the submittal indicates a lack of review or the contractor's / sub-contractor's review is incomplete, the submittal will be returned, unchecked, to the General Contractor for correction of any / all deficiencies for subsequent re-submittal.

F. Revise and resubmit submittal as required; clearly identify all changes made since previous submittal.

G. After review, distribute copies to all concerned parties.

H. The Contractor shall perform no portion of the Work for which the Contract Documents require submittal and review of shop drawings, product data, samples or similar submittals until the respective submittal has been reviewed by the Engineer / Consultant without request for re-submittal.

3.4 CLAIM NOTIFICATION

A. If the submitter or contractor issues submittals for which an additional cost is anticipated, the submittal must clearly indicate such cost including all supporting information.
   01 Lack of accompanying cost information known at the time of the original submittals shall be grounds for disallowance of such cost.

B. Upon return of submittal(s) to the originator of the submittal(s), the submitter shall thoroughly review all mark-ups and / or comments prior to proceeding with the work.

C. Based on the mark-ups and / or comments returned, the submitter shall have fifteen (15) calendar days to submit a claim notification for additional costs the submitter may feel is warranted by the mark-ups / and or comments of the Engineer or Consultant.
   01 The fifteen (15) calendar day period shall commence upon Contractor's receipt of the submittal from the Engineer.

D. In the absence of any claim notification within the specified time period, it shall be agreed the submitter shall provide the work in accordance with the final, reviewed submittal at no additional cost.

E. In the event a claim notification is submitted to the general contractor / construction manager, the submittal process shall not be complete until all such claim notifications have been fully resolved.

END OF SECTION

SECTION 01 33 23

SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Digital submittal of Shop Drawings and Product Data
   2. Delivery of samples to Engineer and Consultants

B. Related Requirements:
   1. Document 00 61 27 - General Conditions of the Contract for Construction
   2. Document 00 73 00 – Supplementary Conditions to the Contract for Construction
   3. Section 01 31 00 - Project Management and Coordination
   4. Section 01 32 16 - Construction Progress Schedules
   5. Section 01 50 00 - Temporary Facilities and Controls

1.2 GENERAL

A. Refer to General Conditions, Paragraph 3.12 (*Shop Drawings, Product Data and Samples*).

B. Within 30 calendar days of the Contract Date, prepare and submit with the Schedule of Values a comprehensive list of Shop Drawings, Product Data and Samples including products proposed for substitution. Include the estimated date of each submittal and anticipated date of submittal return. Allow the Engineer reasonable time to review submittals.

C. Prepare list based on each Specification Section.

D. Include the following for products specified under reference standards:
   1. Name and address of manufacturer
   2. Trade name
   3. Model or catalog designation
   4. Manufacturer's data, including performance and test data, reference standards

1.3 SHOP DRAWINGS

A. Prepared by a qualified detailer. Prepare project-specific information, drawn accurately to scale. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data. Include supplier’s / detailer’s / manufacturer's title block.

B. Identify details by reference to sheet and detail numbers shown on Contract Documents.

C. Present in a clear and thorough manner original drawings which illustrate the portion of the work showing fabrication, layout, setting, or erection details, prepared by a qualified detailer. Title each drawing with Project and Contract name and number; identify each element of drawings by reference to sheet number and detail, schedule, or room number of Contract Documents.

1.4 PRODUCT DATA

A. Manufacturer's standard schematic drawings and diagrams:
   1. Modify drawings to delete information which is not applicable to the work.
   2. Supplement standard information to provide additional information specifically applicable to the work.

B. Manufacturer's catalog sheets, brochures, diagrams, schedules, performance charts, illustrations and other standard descriptive data:
   1. Clearly mark each copy to identify pertinent materials, products or models.
   2. Show dimensions and clearances required.
   3. Show performance characteristics and capacities.
   4. Show wiring or piping diagrams and controls.

C. Submit only pages which are pertinent; mark each copy of standard printed data to identify pertinent products, referenced to specification section and Article number. Show reference standards, performance characteristics and capacities; wiring and piping diagrams and controls; component parts; finishes; dimensions; and required clearances.

D. Modify manufacturer's standard schematic drawings and diagrams to supplement standard information and to provide information specifically applicable to the work. Delete information not applicable.

1.5 SAMPLES

A. Office samples shall be of sufficient size and quantity to clearly illustrate:
   1. Functional characteristics of product or material, with integrally related parts and attachment devices.
   2. Full range of color samples.

B. Field Samples and Mock-ups:
   1. Erect at project site at location acceptable to Engineer.
   2. Construct each sample or mock-up complete, including work of all trades required in finish work.
   3. Install each sample complete and finished. Acceptable finishes in place may be retained in completed work.

C. Submit full range of manufacturer's standard finishes except when more restrictive requirements are specified, indicating colors, textures and patterns, for Engineer selection.

D. Submit samples to illustrate functional characteristics of products, including parts and attachments.

E. Approved samples which may be used in the work are indicated in the specification section.

F. Label each sample with identification required for transmittal letter.

1.6 CONTRACTOR REVIEW

A. Review submittals prior to transmittal; determine and verify field measurements, field construction criteria, quantities and details, manufacturer's catalog numbers and conformance of submittal with requirements of Contract Documents.

B. Coordinate submittals with requirements of work and of Contract Documents.

C. Sign or initial in a rubber-stamped review block format, each sheet of shop drawings and product data and each sample label to certify compliance with requirements of Contract Documents. Notify Engineer in writing at time of submittal, of any deviations from requirements of Contract Documents.

D. Do not fabricate products or begin work which requires submittals until return of submittal with Engineer acceptance.

E. Contractor's responsibility for errors and omissions in submittals is not relieved by Engineer's review of submittals.

F. Contractor's responsibility for deviations in submittals from requirements of contract documents is not relieved by Engineer's review of submittals, unless Engineer gives specific written acceptance of deviations. Engineer will review submittals for general conformance to design intent only.

1.7 SUBMITTAL REQUIREMENTS

A. Submit shop drawing and product data as soon as practicable after award of contract but not later than 30 days before dates reviewed submittals will be needed.

B. Digital Submittals: Submit to the Engineer, or applicable consultant, shop drawings, product data, and samples required by specification sections. Do not submit illegible fax copies or carbon copies of shop drawings and product data.
   1. Submittals to be reviewed by consultants shall be submitted directly to the applicable consultant with a copy of only the digital transmittal simultaneously copied to the Engineer. Submittals will be reviewed by the consultant and then delivered/transmitted to the Engineer for his review prior to transmitting them to the contractor. Submittals to be reviewed by the testing lab shall be handled in the same manner.
   2. Color Selections & Samples: Provide one sample or cut sheet for the Engineer’s records.

C. Submit all office samples as soon as practicable but not later than 20 days after award of contract in order to facilitate color selections and coordination of the various materials. Final color selections and release of shop drawings contingent upon color selection will not be made until all office samples have been submitted, coordinated and approved.

D. Contractor is responsible for the costs associated with the digital delivery of all submittals, and hard copy where required, to the Engineer and the Engineer's consultants and retrieval of all submittals from the Engineer, when necessary.

E. Accompany submittals with transmittal letter containing:
   1. Date.
   2. Project title and number.
   3. Contractor's name and address.
   4. Identification of specification section and submittal numbers.
   5. The number of each shop drawing, product data and sample submitted.
   6. Notification of deviations from contract documents.
   7. Other pertinent data.

F. Submittals shall include:
   1. Date and revision dates.
   2. Project title and number.
   3. Names of Engineer, Contractor, subcontractor, supplier and manufacturer.
   4. Identification of product or material and specification section number.
   5. Relation to adjacent structure, materials or other critical features.
   6. Field dimensions, clearly identified as such.
   7. Applicable reference standards.
   8. A blank space 3x4 inches for Engineer's stamp.
   9. Identification of deviations from contract documents.
   10. Contractor's stamp, initialed or signed, certifying to review of submittal, verification of field measurements, compliance with contract documents, and coordination with requirements of the work. Note: Absence of the Contractor's stamp shall constitute grounds for rejection of the submittal until such time as the submittal has been processed in accordance with this requirement.
   11. Other pertinent data required by specifications.

1.8 RESUBMITTAL REQUIREMENTS

A. Re-submittal: For shop drawings and product data not approved by Engineer, make corrections and changes in submittals required by Engineer and resubmit until approved.

B. Shop Drawings:
   1. Revise initial drawings and resubmit as specified for initial submittal.
   2. Indicate on drawings any changes which have been made, other than those requested by Engineer.

C. Product Data and Samples: Submit new data and samples as specified for initial submittal

1.9 DISTRIBUTION OF SUBMITTALS AFTER REVIEW

A. Distribute reviewed copies of Shop Drawings and Product Data which carry Engineer's review stamp as follows: Contractor's file, project site file, record documents file, other prime contractors.

B. Keep and maintain a full set of submittals throughout the construction phase to be submitted to the Engineer with other Close-out documents for delivery to the Owner for his permanent record. Set of submittals shall be delivered to the Engineer in cardboard file boxes with string and button type closures. Organize submittals by CSI divisions, utilizing neatly labeled pressboard dividers to separate the sections. Neatly label short end of box with project name, contents and duration of construction.

PART 2 - PRODUCTS

Not used.

PART 3 - EXECUTION

Not used.

END OF SECTION

SECTION 01 35 23

BEAUMONT INDEPENDENT SCHOOL DISTRICT
CONTRACTOR SITE RULES

DELIVERY AND SITE RULES WITH STUDENTS IN SCHOOL:

Should a purchase order or contract specify delivery/work which requires visitation to an Beaumont ISD facility, the following site rules shall be followed:

All contractor's and their employees, subcontractors and their agents and employees, must be cleared in advance in each building front office/receptionist area before entry into any Beaumont ISD building via the Raptor System. Visitors will be required to scan their Driver's License or other state issued ID.

What is the "Raptor System?" The Raptor System is a system that instantly screens for registered sex offenders in all 50 states and can also screen for individuals with restraining orders, custody issues, suspended or expelled students, known gang members, or for any custom alert.

When a visitor is cleared, the system prints a badge featuring the visitor's name, photo, date and time, and destination. If a potential threat is identified, the Raptor system sends instant alerts to designated officials, including administrators and law enforcement, via email, text messaging and/or page.

No visitors are allowed on campuses without this custom badge.

If work will be done while students are on campus, each of the employees from the vendor will need to be registered with the FAST system for a full and complete background check.

A. No foul language or spitting on the floor.

B. No tobacco products on school property.

C. The possession or use of alcohol or illegal drugs is strictly prohibited.

D. No tank tops – workers must be fully clothed.

E. No workers with a history of felony convictions or warrants.

F. No parking on grass, under shade trees, sidewalks or non-vehicular paved areas.

G. Contractor's employees, Subcontractors and their agents and employees working on any District facility must wear picture identification with the company name. Any exceptions must be approved in advance with the designated District representative.

H. Keep the premises free from accumulation of waste, materials or rubbish caused by the work under this contract at each site. Boxes must be broken down prior to removal from the building. Upon completion of the work, and prior to the final inspection, have the premises in a neat and clean condition.

I. Take all precautions necessary for the safety of, and provide protection to prevent damage, injury or loss to:
   a. All employees on the project and all other persons who may be affected thereby.
   b. All the work and all materials to be incorporated therein, whether in storage on or off the site.
   c. All property at the site and adjacent thereto including trees, shrubs, lawns, walks, pavements, roadways, structures, utilities and any other school property.

J. A competent supervisor who understands the full scope of the work shall be on site at all times.

K. School administrative services shall at all times have priority over the Contractor's use/service/etc.

L. Any work that may interfere with school activities must be authorized in advance through administrative channels. A management plan will be devised to minimize the effect of the interference.

M. The Contractor shall be responsible to BEAUMONT ISD for acts and omissions of the Contractor's employees, Subcontractors and their agents and employees, and other persons performing portions of the work under the contract.

N. No work within the confines of a secured building will be allowed without at least one District employee present. The contractor must pay the BEAUMONT ISD Custodial Department in advance for the cost of adding a custodian to a building for after-hours work.

O. Doors must not be propped open when working after-hours.

END OF SECTION

SECTION 01 36 13

CUTTING AND PATCHING

CONDITIONS OF THE CONTRACT, SUPPLEMENTARY CONDITIONS AND DIVISION 1 APPLY TO THIS SECTION

PART 1 - GENERAL

1.1 DESCRIPTION

A. Refer to Instructions to Proposers for substitutions.

B. Scope of Work:
   01 Provide cutting and patching of existing work as required for the proper installation of new work, including proper interface with existing work.
   02 Cutting and patching includes, but is not limited to:
      a. Gypsum board assemblies
      b. Finish flooring
      c. Wall finishes
      d. Doors and frames
      e. Ceiling assemblies

C. Related Work:
   01 Section 01 36 16 – Remodeling and Alteration Procedures
   02 Section 02 41 19 – Selective Demolition.

1.2 SUBMITTALS

A. Provide all submittals in accordance with Section 01 33 00 – Submittal Procedures.

B. Submit written request in advance of cutting or alteration which affects:
   01 Structural integrity of any element of the project
   02 Integrity of weather-exposed or moisture-resistant element
   03 Efficiency, maintenance, or safety of any operational element
   04 Visual qualities of sight-exposed elements
   05 Work of Owner or separate contractor
   06 Any work in or around any known or potential area in which asbestos or lead based products exist.

C. Procedural Proposal for Cutting and Patching: Where prior consent for cutting and patching is required, submit proposed procedures for this work well in advance of the time work will be performed, and request consent to proceed. Include the following information, as applicable, in the submittal:
   01 Describe the nature of the work and how it is to be performed, indicating why cutting and patching cannot be avoided. Describe anticipated results of the work in terms of changes to and effects upon existing work, including structural, operational and visual changes, as well as other significant elements.
   02 List products to be used and firms that will perform work.
   03 Give dates when work is expected to be performed.
   04 List utilities that will be disturbed or otherwise be affected by work, including those that will be relocated and those that will be temporarily out of service. Indicate how long utility services will be disrupted.
   05 Where cutting and patching of structural work involves the additional reinforcement, submit details and engineering calculations to show how that reinforcement is integrated with the original structure to satisfy requirements.

06 Consent by the Engineer to proceed with cutting and patching work does not waive the Engineer's right to later require complete removal and replacement of work found to be cut and patched in an unsatisfactory manner.

1.3 DESCRIPTION OF REQUIREMENTS

A. Definition: "Cutting and patching" includes cutting into existing construction to provide for the installation or performance of other work and subsequent fitting, and patching required to restore surfaces to their original condition.
   01 Cutting and patching is performed for coordination of the work, to uncover work for access or inspection, to obtain samples for testing, to permit alterations to be performed, to remove and replace work not conforming to Contract requirements, or for other similar purposes.
   02 Cutting and patching performed during the manufacture of products, or during the initial fabrication, erection of installation processes is not considered to be "cutting and patching" under this definition. Drilling of holes to install fasteners and similar operations are also not considered to be cutting and patching.

B. Refer to other sections of these specifications for specific cutting and patching requirements, and limitations applicable to individual units or work.
   01 Unless otherwise specified, requirements of this Section apply to mechanical and electrical work. Refer to Divisions, 21, 22, 23, 26, 27 and 28 sections for additional requirements and limitations on cutting and patching of mechanical and electrical work.

1.4 RELATED REQUIREMENTS

A. Individual Specifications Sections:
   01 Cutting and patching incidental to work of this Section.
   02 Advance notification to other trades of openings required in work of those trades.
   03 Limitations on cutting structural members.

1.5 QUALITY ASSURANCE

A. Requirements for Structural Work: Do not cut and patch structural work in a manner that would result in a reduction of load-carrying capacity or load-deflection ratio.

B. Before cutting and patching the following categories of work, submit a written request and obtain the Engineer's consent to proceed with cutting and patching, as described in the procedural proposal for cutting and patching.
   01 Structural steel
   02 Miscellaneous structural metals, including lintels, equipment supports, stair systems and similar categories of work
   03 Structural concrete
   04 Foundation construction
   05 Shoring assemblies
   06 Bearing and retaining walls
   07 Structural decking
   08 Exterior wall construction
   09 Piping, ductwork, vessels and equipment

C. Operational and Safety Limitations: Do not cut and patch operational elements or safety related components in a manner that would result in a reduction of their capacity, to perform in the manner intended, including energy performances, or that would result in increased maintenance, or decreased operational life, or decreasing safety. Before cutting and patching the following elements of work, and similar work elements where directed, obtain the Engineer's consent to proceed with cutting and patching.

01 Shoring, bracing, and sheeting
02 Primary operational systems and equipment
03 Water/moisture vapor/air/smoke barriers, membranes and flashings
04 Noise and vibration control elements and systems
05 Control, communication, conveying, and electrical wiring systems

D. Visual Requirements: Do not cut and patch work exposed on the building's exterior or in its occupied spaces, in a manner that would, in the Engineer's opinion, result in lessening the building's aesthetic qualities. Do not cut and patch work in a manner that would result in substantial visual evidence of cut and patch work. Remove and replace work judged by the Engineer to be cut or patched in a visually unsatisfactory manner. If possible, retain the original installer or fabricator, or another recognized, experienced and specialized firm to cut and patch the following categories of exposed work:
01 Architectural concrete finishes
02 Brick and concrete unit masonry
03 Ornamental metal
04 Roofing
05 Preformed metal panels
06 Window system
07 Gypsum or cement plaster
08 Acoustical ceilings
09 Carpeting
10 Wall covering
11 HVAC enclosure, cabinets or covers

1.6 PAYMENT FOR COSTS

A. Cost for work necessary to accommodate installation of new work shall be borne by the Contractor or subcontractor responsible for installing new work.

B. Costs caused by ill-timed or defective work, or work not conforming to contract documents, including costs for additional services of the Engineer and other Design Consultants shall be borne by the party responsible in the judgment of Engineer, for ill-timed, rejected or non-conforming work.

C. Costs for work performed on instruction of Owner, other than the correction of defective or non-conforming work shall be responsibility of the Owner, who shall issue an appropriate Change Order for the increase in costs.

PART 2 - PRODUCTS

2.1 MATERIALS

A. General: Except as otherwise indicated, or as directed by the Engineer, use materials for cutting and patching that are identical to existing materials. If identical materials are not available or cannot be used, use materials that match existing adjacent surfaces to the fullest extent possible, with regard to visual effect. Use materials for cutting and patching that will result in equal-or-better performance characteristics.

B. For any change in material, submit a request for substitution under the provisions of Instructions to Proposers.

PART 3 - EXECUTION

3.1 GENERAL

A. Execute cutting, fitting, and patching to complete work, and to:
   01 Fit several parts together which will integrate with other work.
   02 Uncover work to install ill-timed work.
   03 Remove and replace defective and non-conforming work.
   04 Remove samples of installed work for testing.
   05 Provide openings in elements of work for penetrations of mechanical and electrical work.
   06 Fill and refinish existing holes and damaged areas.

3.2 INSPECTION

A. Before cutting, examine the surface to be cut and patched and the conditions under which the work is to be performed. If unsafe or otherwise unsatisfactory conditions are encountered, take corrective action before proceeding with the work.

3.3 PREPARATION

A. To prevent failure, provide temporary support of work to be cut.

B. Protect other work during cutting and patching to prevent damage. Provide protection from adverse weather conditions for that part of the project that may be exposed during cutting and patching operations.

C. Take precautions not to cut existing pipe, conduit or duct serving the building, but scheduled to be relocated until provisions have been made to bypass them.

3.4 PERFORMANCE

A. Employ skilled workmen to perform cutting and patching work. Except as otherwise indicated or as approved by the Engineer, proceed with cutting and patching at the earliest feasible time and complete work without delay.

B. Cut the work using methods that are least likely to damage work to be retained or adjoining work. Where possible, review the proposed procedures with the original installer; comply with original installer's recommendations.
   01 In general, where cutting is required, use hand or small power tools designed for sawing or grinding, not hammering and chipping. Cut through concrete and masonry using a cutting machine such as a carborundum saw or core drill to ensure a neat hole. To avoid marring existing finished surfaces, cut or drill from the exposed or finished side into concealed surfaces. Temporarily cover the opening when not in use.
   02 Comply with requirements of applicable sections of Division 2 when cutting and patching, excavating and backfilling.
   03 Bypass utility services such as pipe and conduit, before cutting, where such utility services are shown or required to be removed, relocated or abandoned. Cut-off conduit and pipe in walls or partitions to be removed. After bypassing and cutting, cap, valve or plug, and seal tight the remaining portion of pipe and conduit to prevent entrance of moisture or other foreign matter.

C. Patching: Patch with seams which are durable and as visible as possible. Comply with specified tolerances for the work.
   01 Where feasible, inspect and test patched areas to demonstrate integrity of work.
   02 Restore exposed finishes of patched areas, and where necessary, extend finish restoration into retained adjoining work in a manner which will eliminate evidence of patching and refinishing.
   03 Where removal of walls or partitions extend one finished area into another finished area, patch and repair floor and wall surfaces in the new space to provide an even surface of

uniform color and appearance. If necessary to achieve uniform color and appearance, remove the existing floor and wall coverings and replace with new materials.

04 Where a patch occurs in a smooth painted surface, extend final paint coat over the entire unbroken surface containing the patch, after the patched area has received prime and base coat.

05 Patch, repair or rehang existing ceilings as necessary to provide an even plane surface of uniform appearance.

D. Fit work airtight to pipes, sleeves, ducts, conduit, and other penetrations through surfaces.

E. At penetrations of fire-rated wall, ceiling, or floor construction, completely seal voids with fire-rated material, full thickness of the construction element.

F. Refinish surfaces to match adjacent finishes. For continuous surfaces, refinish to nearest intersection; for an assembly, refinish entire unit.

3.5 CLEANING

A. Thoroughly clean areas and spaces where work is performed or used as access to work. Completely remove paint, mortar, oils, putty and items of similar nature. Thoroughly clean piping, conduit and similar features before painting or other finish is applied. Restore damaged pipe covering to its original condition.

END OF SECTION

SECTION 01 36 16

REMODELING AND ALTERATION PROCEDURES

CONDITIONS OF THE CONTRACT, SUPPLEMENTARY CONDITIONS AND DIVISION 1 APPLY TO THIS SECTION

PART 1 - GENERAL

1.1 DESCRIPTION

A. Refer to Instructions to Proposers for substitutions.

B. Scope of Work:
01 This Section contains general provisions and requirements pertaining to all remodeling, removal and relocation work in the existing building, and becomes a part of each Section and Division performing remodeling, removal and relocation work for this project, with the same force and effect as if written in full therein.
02 Take all necessary precautions to keep trespassers out of the work areas. Secure work areas from entry when work is not in progress.
03 Perform all remodeling, demolition, removal and relocation work in strict accordance with Owner's instructions and applicable Federal, State and local health and safety standards, codes and ordinances. Where conflicts occur, the more restrictive requirement shall govern.

1.2 EXISTING CONDITIONS

A. Obvious existing conditions, installations and obstructions affecting the work shall be taken into consideration as necessary. Work to be done is the same as though they were completely shown or described.

B. Items of existing construction indicated to remain upon completion of the Contract, but which require removal to complete the work, shall be carefully removed and replaced as required. The replaced work shall match its condition at the start of the work, unless otherwise required.

C. Visit the site and inspect all existing conditions, including access to the site, the nature of structures, objects and materials to be encountered, and all other facts concerning or affecting the work. Information on the drawings showing existing conditions does not constitute a guarantee that other items may not be found or encountered.

D. Utilities: Do not interrupt existing utilities serving occupied or used facilities, except when authorized by the A in writing two weeks in advance. Provide temporary services during interruptions to existing utilities.

E. Stop work and notify Engineer and owner immediately if any hazardous materials are encountered (especially asbestos or lead based products).

PART 2 - PRODUCTS

2.1 SALVAGED MATERIALS

A. The Owner reserves the right of first refusal on all salvaged items. Remove remaining items from the site as work progresses. Storage or sale of items on site is not permitted. Burning of removed materials on site is not permitted.

B. Store salvaged items in a dry, secure place on site.

C. Salvaged items not required for use in repair of existing work shall remain the property of the Owner.

D. Do not incorporate salvaged or used material in new construction, except with permission of the Engineer.

2.2 PRODUCTS FOR PATCHING, EXTENDING AND MATCHING

A. Contract documents do not define products or standards of workmanship present in existing construction. Determine products by inspection and by use of the existing construction. Provide same or similar quality products or types of construction such as the existing structure, where needed to patch or extend existing work.

B. If reasonably matched products are not obtainable, improve appearance by minor relocating some of the existing products, and grouping new ones in a pattern arranged by the Engineer. Do not replace products scheduled for retaining because matching ones are not obtainable, except as directed by a Change Order.

PART 3 - EXECUTION

3.1 PROTECTION OF WORK TO REMAIN

A. Protect existing work from damage by use of barricades, tarpaulins, temporary walls, plywood, planking, masking, or other suitable means and methods as approved by the Engineer.

B. If work to remain in place is damaged, restore to original condition at no additional cost to the Owner.

C. Concealed Conditions: If conditions cause changes in the work from requirements of the Contract Documents, the Contract Sum will be adjusted in accordance with the General Conditions.

3.2 PROCEDURES

A. Refinishing at Removed Work: Cut below the surface of substrate materials and patch over the area of removal with finish materials so removal is not apparent.

B. Remove and replace existing ceilings, cut, patch, or replace existing walls, partitions and floors, as may be necessary for access to valves, piping, conduit and tubing by mechanical and electrical trades, as directed and approved by the Engineer. Work involved shall be performed by the appropriate subcontractor, or by other properly qualified subcontractors.

C. Patch and extend existing work using skilled mechanics who are capable of matching existing quality of workmanship. Quality of patched or extended work shall not be less than that specified for new work.

D. Cutting:
   01 Concrete and Masonry: Saw cut where feasible.
   02 Plaster: Cut back to sound plaster on straight lines, and back-bevel edges of remaining plaster. Trim and prepare existing lath for tie-in of new lath.
   03 Woodwork: Cut back to a joint or panel line. Undamaged removed materials may be reused.
   04 Resilient Tiles: Remove in whole units to natural breaking points or straight joint lines, with no damaged or defective existing tiles remaining where joining new construction.

05 Salvaged Materials: Carefully remove to avoid damage, thoroughly clean and reinstall as indicated, or store as directed.

06 Doors: Remove in such manner as to facilitate filling in of openings or installation of new work, as required by the drawings.

07 Structural Elements: Remove only as shown on the Structural drawings. If not specifically shown, but removal is required, perform such removal or alteration only upon written approval of the Engineer. Do not damage or alter any structural element of the existing building.

E. Patching:

01 Match existing work where possible; if unavailable, use salvage material for patching, and provide totally new material in areas where salvage has been removed. Consult with the Engineer concerning locations for salvaging materials.

02 Repairs or continuations of existing work shall be relatively imperceptible in the finished work when viewed under finished lighting conditions from a distance of 6 feet.

03 Patching, Repairing, and Finishing of Existing Work: Perform in compliance with the applicable requirements of the specification section covering the work to be performed and the requirement of this Section.

F. Erect scaffolding as necessary to gain access to the various parts of the work. Provide structurally sound, rigidly braced and properly constructed scaffolding, shoring and bracing as necessary to positively protect the affected elements and building, and to support the activities or workmen and loads. Design and construction of scaffolds and supports shall be in accordance with applicable safety regulations. Material used shall be adequate to support anticipated loads with a properly calculated margin of safety.

G. Noise Producing Equipment: Minimize use of noise producing equipment. Limit excessive noise to periods of vacancy or provide sound control. Arrange schedules in advance with the Engineer.

3.3 PAINTING AND FINISHING

A. Preparation: Prepare patched areas as required for new work. Wash existing painted surfaces with neutral soap or detergent, thoroughly rinse, and sand when dry.

B. Painting and Finishing: Conform to the applicable provisions of the Painting Section. Prepare bare areas and patches in existing painted surfaces with specified primer and intermediate coats, sanded smooth and flush with adjoining surfaces.

3.5 DISPOSAL OF DEBRIS

A. Remove material, debris and rubbish resulting from work of this Section from the building and site as it accumulates. Keep all areas of work in “broom clean” condition as the work progresses.

B. At completion of renovation and remodeling work in each area, provide final cleaning and return space to a condition suitable for use by the Owner.

END OF SECTION

SECTION 01 50 00

TEMPORARY FACILITIES AND CONTROLS

CONDITIONS OF THE CONTRACT, SUPPLEMENTARY CONDITIONS AND DIVISION 1 APPLY TO THIS SECTION.

PART 1 - GENERAL

1.1 DESCRIPTION

A. Refer to Instructions to Proposers for substitutions.

B. Scope:
1. Provide temporary facilities adequate to facilitate the requirements to complete the Work.
2. Temporary facilities shall only be for the duration of construction, unless noted otherwise, and all temporary facilities shall be completely removed at the completion of the project.
3. Any areas disturbed by the placement of temporary facilities shall be repaired / replaced to a finished condition consistent with the surrounding finished area.
4. Maintain operation of existing fire alarm and security systems throughout the progress of the Work

PART 2 - GENERAL

2.1 UTILITIES

A. Owner shall allow usage of 110 / 120 V power existing in the building(s).
1. For voltages higher than 110 / 120V, Contractor shall provide temporary power. Coordinate with the local power provider as required.
2. The Contractor is responsible for overloading or excess use, or any damage resulting from overloading or excess use, or any damage resulting from his use of utilities.

B. Owner shall allow usage of existing water supplies and hose bibbs in / at the building(s).
1. The Contractor is responsible for overloading or excess use, or any damage resulting from overloading or excess use, or any damage resulting from his use of utilities.

C. The Contractor shall provide and maintain all other required sources of temporary utilities as may be necessary.

2.2 SANITARY FACILITIES

A. Use of Owner’s sanitary facilities is strictly prohibited.

B. Furnish temporary sanitary facilities and maintain in compliance with regulations of State Department of Health and other authorities having jurisdiction.

C. Maintain a regular service schedule for the facilities.

2.3 STORAGE FACILITIES

A. Provide and maintain adequate weather tight, lockable, enclosed storage facilities as required to securely house materials and equipment stored on the job site.
1. Coordinate with the Owner and Engineer for acceptable location(s).

B. Replace materials improperly stored and damaged by weathered conditions.

C. Allow for temporary freeze protection as required.

D. Remove storage facilities at completion of work or when materials are stored within the structure in a weather tight condition.

2.4 SIGNS

A. Contractor shall not erect any signs without Owner's authorization.

B. Other signs permitted at the site:
1. Warning signs.
2. Directional signs.
3. Identification signs at field offices.

C. Secure and pay for all sign permits as required by local authorities.

2.5 BARRIERS

A. Provide temporary walls to separate invasive work from on-going school operations within the building. Such types of work areas include:
1. New entry vestibule wall assemblies
2. New cross corridor wall assemblies
3. Other areas where modifications are being made to existing architecture.

B. Temporary walls shall be sufficient to be self-supporting and prevent any access into the Work area by unauthorized people.
1. Provide temporary egress doors as required by the governing authority having jurisdiction (i.e. fire marshal's office).
2. Verify conditions and implement as required.

C. Coordinate with Owner and Engineer for composition, location, and duration of all temporary walls prior to installation.

D. At completion of the work relative to the temporary wall, completely remove it and restore all affected existing finishes to original condition.

2.7 SECURITY

A. Determine if and when watchmen are necessary for protection to the work, and provide such services when necessary.

B. Neither the provision of watchmen nor the failure to provide watchmen shall relieve the Contractor of responsibility in event of injury to persons or damage to property.

2.8 CLEANING

A. Trash Removal:
1. Clear the building and site of trash a minimum of once a week.
2. When rapid accumulation occurs, make more frequent removals.
3. Remove highly combustible trash such as paper and cardboard daily.
4. Dumpsters will not be allowed to overflow and should be emptied on a regular basis.
5. Use of Owner's dumpsters and trash receptacles is strictly prohibited.

B. Disposition of Debris:

1. Remove debris from the site and legally dispose of in strict accordance with local ordinances and regulations.
2. Locations for disposal shall be of the Contractor's choice within the above restriction.
3. No debris or material may be buried or burned at the site.
4. Take necessary precautions to prevent accidental burning of materials by avoiding large accumulations of combustible materials.

C. Cleaning:
1. Maintain installed work in a manner that will protect the work.
2. Thoroughly clean the work, including the removal of smudges, marks, stains, fingerprints, soil, dirt, paint spots, dust, lint, discolorations, and other foreign materials.

2.9 TEMPORARY FIRST AID FACILITIES

A. Provide first aid equipment and supplies, with qualified personnel continuously available to render first aid at the site.

B. Provide a sign, posted at the telephone, listing the telephone numbers for emergency medical services: physicians, ambulance services and hospitals.

2.10 TEMPORARY FIRE PROTECTION

A. Provide a fire protection and prevention program for employees and personnel at the site.
1. For work on existing campuses or buildings, coordinate with the Owner and Engineer to develop a program that will facilitate the Owner’s needs (i.e. building evacuation and similar).
2. Where existing building users must evacuate into a work area, coordinate with the local fire marshal having jurisdiction to implement temporary measures required to maintain life safety code compliance.

B. Provide and maintain fire extinguishing equipment ready for instant use at all areas of the project, and at specific areas of critical fire hazard.

C. Equipment:
1. Hand extinguishers of the types and sizes recommended by the National Board of Fire Underwriters to control fires from particular hazards.
2. Barrels of water with buckets designated for fire control purposes.
3. Water hoses connected to an adequate water pressure and supply system.
4. Construction period use of permanent fire protection system.

D. Enforce Fire-safety Discipline:
1. Store volatile materials in an isolated, protected location.
2. Avoid accumulations of flammable debris and waste in or about the Project.
3. If allowed on site at all, prohibit smoking in the vicinity of hazardous conditions.
4. Closely supervise welding and torch-cutting operations.
5. Supervise locations and operations of portable heating units and fuel.

E. Maintain fire extinguishing equipment in working condition, with current inspection certificate attached to each extinguisher.

2.11 CONSTRUCTION AIDS

A. Provide construction aids and equipment required to assure safety for personnel and to facilitate the execution of the work; including, but not limited to scaffolds, staging, ladders, stairs, ramps, runways, platforms, railings, hoists, cranes, chutes and other equipment.

B. When permanent stair framing is in place, provide temporary treads, platforms and railings, for use by construction personnel.

C. Maintain all equipment in a first-class, safe condition.

2.12 ACCESS ROADS AND PARKING AREAS

A. For work performed on existing, occupied site, coordinate with the Owner and Engineer for location(s) of temporary access and construction parking.
   1. Where Contractor is allowed to use existing access roads, paving, parking, sidewalks and similar, Contractor shall thoroughly photographs or video all such areas to document existing conditions.
   2. Contractor shall repair / replace any area(s) damaged as the result of construction activities.

2.13 FIRE ALARM SYSTEM

A. Throughout the progress of the Work, maintain continuous operation of the existing, operational fire alarm system.

B. Fire alarm devices shall be protected as required; however, such protection shall not render the device inoperable. Provide temporary devices to be removed at the completion of the Work if necessary to maintain a fully functional and operational fire alarm system.

C. If wiring or connections to the fire alarm system components are disrupted as a result of construction activities, immediately make all necessary repairs and / or replacements necessary to restore full operation.

D. The fire alarm system shall be tested at the end of each work day to verify it is fully functional. Coordinate with Owner as required.

END OF SECTION

SECTION 01 74 00

CONSTRUCTION CLEANING

CONDITIONS OF THE CONTRACT, SUPPLEMENTARY CONDITIONS AND DIVISION 1 APPLY TO THIS SECTION.

PART 1 - GENERAL

1.1 SECTION INCLUDES

A. Administrative and procedural requirements for final cleaning at Substantial Completion.

1.2 RELATED DOCUMENTS

A. Drawings, Specifications and provisions of Construction Contract, including General, Special and Supplementary Conditions and other General Requirements.

1.3 RELATED SECTIONS

A. Other Division 1 Specifications including, but not limited to:
   01 Section 01 50 00 – Temporary Facilities
   02 Section 01 77 00 – Closeout Procedures
   03 Special cleaning requirements for specific construction elements are included in appropriate Sections of Divisions 2 through 16

1.4 QUALITY ASSURANCE

A. Multiple Prime Contracts: Each prime contractor is responsible for final cleaning its own work. Project Manager is responsible for coordinating final cleaning of an area or piece of equipment where more than one prime contractor is involved.

1.5 SITE CONDITIONS

A. Environmental Requirements: Conduct cleaning and waste disposal operations in compliance with applicable laws, including, without limitation, Environmental Laws.
   01 Do not dispose of volatile wastes, such as mineral spirits, oil, or paint thinner, in storm or sanitary drains.
   02 Burning or burying of debris, rubbish, or other waste material on premises is not permitted.

PART 2 – PRODUCTS

2.1 MATERIALS

A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART 3 - EXECUTION

3.1 FINAL CLEANING

A. General: Employ experienced workers or a professional cleaning service for final cleaning. Clean each surface or unit of Work to condition expected from commercial building cleaning and maintenance program. Comply with manufacturer’s instructions.

B. Complete following cleaning operations applicable to project before requesting inspection for certification of Substantial Completion for entire Project or portion of Project.

01 Clean site, yard and grounds in areas disturbed by construction activities including landscape development areas, of rubbish, waste material, litter, and foreign substances.

02 Sweep paved areas broom clean. Utilize magnetic sweeps on parking lots to remove all metallic debris capable of causing vehicle tire damage.

03 Remove petrochemical spills, stains, and other foreign deposits.

04 Remove tools, construction equipment, machinery, and surplus material from Site.

05 Clean exposed exterior and interior hard-surfaced finishes including doors, hardware and casework, to dirt-free condition, free of stains, films and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to original condition.

06 Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.

07 Broom clean concrete floors in unoccupied spaces.

08 All carpeting in work areas shall be cleaned by a professional carpet cleaning company acceptable to the owner. Carpet shall be thoroughly vacuumed prior to the use of hot water extraction.

09 Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compounds and other substances that are noticeable vision-obscuring materials. Replace chipped or broken glass and other damaged transparent materials. Polish mirrors and glass, taking care not to scratch surfaces.

10 Remove labels that are not permanent labels.

11 Touch up and otherwise repair and restore marred, exposed finishes and surfaces. Replace finishes and surfaces that cannot be satisfactorily repaired or restored or that already show evidence of repair or restoration.

a. Do not paint over “UL” and similar labels, including mechanical and electrical name plates.

12 Wipe surfaces of mechanical and electrical equipment, elevator equipment and similar equipment. Remove excess lubrication, paint and mortar droppings and other foreign substances.

13 Clean plumbing fixtures to sanitary condition, free of stains, including stains resulting from water exposure.

14 Replace disposable air filters and clean permanent air filters; clean exposed surfaces of diffusers, registers, and grilles.

15 Clean ducts, blowers and coils if units were operated without filters during construction.

16 Clean any construction related soiled food-service equipment to sanitary condition, ready and acceptable for intended use.

17 Clean light fixtures, lamps, globes and reflectors to function with full efficiency. Wipe handprints and paint clean in the ceiling grids following testing and balancing of HVAC system.

18 Thoroughly clean the work, including the removal of smudges, marks, stains, fingerprints, soil, dirty, paint spots, dust, lint, discolorations and other foreign materials.

19 Disposition of Debris: Remove debris from site and make legal disposition. Locations for disposal shall be of the Contractor’s choice within the above restriction. No debris or material may be buried or burned at the site. Take necessary precautions to prevent accidental burning of materials by avoiding large accumulations of combustible materials.

20 Trash Removal: Clear the building and site of trash at least once a week. When rapid accumulation occurs, make more frequent removals. Remove highly combustible trash such as paper, cardboard, daily.

21 Leave Site and Work clean and ready for occupancy.

C. Remove temporary protection and facilities installed during construction to protect previously completed installations during remainder of construction period.

D. Comply with applicable laws governing cleaning operations. Remove waste materials from site and dispose of lawfully.

END OF SECTION

SECTION 01 77 00

CLOSE-OUT PROCEDURES

CONDITIONS OF THE CONTRACT, SUPPLEMENTARY CONDITIONS AND DIVISION 1 APPLY TO THIS SECTION

PART 1 - GENERAL

1.1 DESCRIPTION

A. Certain procedures have been developed and are required to fulfill all provisions of the Owner-Contractor Agreement with respect to contract Final Completion and Contract Close-Out for the Work / project to be 100% complete.

B. Refer to Section 00 61 27 – General Conditions and Section 00 73 00 – Supplementary Conditions for additional information and requirements.

PART 2 – SUBSTANTIAL COMPLETION

2.1 GENERAL

A. Projects that involve phased sequential construction of major definable areas or projects that involve separate work on multiple campuses shall have Certificates of Substantial Completion issued for each phase or campus, as applicable and agreed upon by the Owner and Contractor. All conditions for Substantial Completion, including liquidated damages, shall apply for each date of Substantial Completion for each phase or campus, as applicable.

B. Individual Substantial Completion Dates for each phase or campus shall be determined and agreed upon by the Owner, Engineer and Contractor. Where an Alternative Proposal dictating a required, guaranteed completion date (dates) is included in the Proposal Form and accepted by the Owner, the date(s) stated therein shall establish the Substantial Completion Dates to be incorporated into the Agreement.

C. The following items are a partial list of requirements, as applicable to the Project, which must be completed prior to establishment of a Substantial Completion date.

01 All work as identified in each section of the Specifications must be 100% complete.
02 All fire alarm system components must be completed, demonstrated to the Owner and approved by the governing authority.
03 Local fire marshal approval must be delivered to the Owner.
04 Health Department approval and certificate, where applicable, must be delivered to Owner.
05 All HVAC air and water balancing must be complete.
06 All energy management systems, security and surveillance systems and low voltage systems and controls must be complete, fully operational and demonstrated to the Owner.
07 All final lockset cores must be installed and all final Owner directed keying completed.
08 All room plaques and exterior signage must be complete.
09 All Owner demonstrations must be completed.
10 A final Certificate of Occupancy must be signed by the governing authority and delivered to the Owner.
11 Operation and Maintenance Manuals. Manuals must be submitted prior to Owner training and orientations of equipment and systems.
12 Scanned Record Drawings. Provide a full size, scanned copy of the record drawings maintained at the site in PDF format.
13 All exterior clean-up and landscaping must be complete, including required stand of grass mowed and edged.

D. Final Cleaning:
   01 The work area shall be thoroughly cleaned inside and outside. Cleaning includes removal of smudges, marks, stains, fingerprints, soil, dirt, spots, dust, lint, and other foreign materials from finished and exposed surfaces.
   02 Remove all temporary facilities.

E. In order for the project, a major portion thereof, a project phase or project campus to be considered Substantially Complete, the following conditions must be met:
   01 All inspections by governmental authorities having jurisdiction over the project must have been finalized; any remedial work required by them must have been completed; and Certificates of Occupancy and similar governmental approval forms must have been issued and copies delivered to the Owner and Engineer.
   02 All work, interior and exterior, shall have been completed and cleaned except minor items (Punch List) which, if completed after occupancy, will not, in the Owner's opinion, cause any interference to the Owner's use of the building or any portion thereof.
   03 All items stipulated in 2.1-C above.

F. The Certificate of Substantial Completion shall be submitted to the Owner and Contractor for their written acceptance of responsibilities assigned to them in such Certificate. Upon such acceptance and consent of surety, if any, the Owner, at his sole discretion, may make (partial) payment of retainage applying to such Work or designated portion thereof which is 100% complete and accepted by the Owner. Such payment, if made at all, shall be adjusted in the Owner's favor for Work that is incomplete or not in accordance with the requirements of the Contract Documents.

G. The date of Substantial Completion shall represent day one (1) of the thirty (30) day period to complete all work and correct all deficiencies contained in the Punch List and the sixty (60) day period allowed for complete Contract Close-Out as described below.

2.2 PUNCH LIST

A. A comprehensive list prepared by the Contractor prior to Substantial Completion, and attached thereto, to establish all items to be corrected, or limited items of work to be completed, if any. This list is intended to represent a limited number of items needing attention.

B. Punch lists shall be furnished to the Engineer in Microsoft Excel and PDF formats. The punch list shall be in matrix form and shall include the following information for each punch list item:
   01 Room number or other suitable location identifier
   02 Description of the work
   03 Sub-contractor / trade sign-off that the work has been verified to be 100% complete and in accordance with the Contract Documents
   04 Sub-contractor / trade sign-off date
   05 General contractor sign-off that the work has been verified to be 100% complete and in accordance with the Contract Documents
   06 General contractor / trade sign-off date
   07 A/E consultant sign-off
   08 A/E consultant sign-off date
   09 If requested by the Owner, provide two additional similar columns for their sign-off.
   10 In the case of excessive repetition of the same item at various locations, the punch list may contain "general notes / items" that shall be applied to the entire project; and it shall be the responsibility of the contractor / sub-contractor to thoroughly examine the entire project and make corrective measures at all applicable locations.

C. Should the Engineer determine that the Contractor's punch list lacks sufficient detail or requires extensive supplementation, the punch list will be returned to the Contractor for re-inspection and

revision. The date of Substantial Completion will be delayed until the punch list submitted is a reasonable representation of the work to be done.

D. A significantly large number of items to be completed or corrected will preclude the Engineer from issuing a Certificate of Substantial Completion. The Owner and Engineer will be the sole judge of what constitutes a significantly large number of items. It is anticipated that the detailed list of items of work to be completed or corrected at the Date of Substantial Completion will be no longer than five (5) typed pages.

E. The Contractor's superintendent shall participate in the preparation of the Contractor's punch list that is submitted to the Engineer and Owner for supplementation. Upon receipt, the Engineer and Consultants shall perform a spot review to determine the adequacy and completeness of the Contractor's punch list.

F. Upon receipt of an acceptable Contractor's punch list, the Contractor's Superintendent shall accompany the Engineer, his Consultants and the Owner (at his discretion) during their observation and the preparation of their supplements to the Contractor's punch list.
   01 The Superintendent shall record or otherwise take note of all supplementary items.
   02 The Engineer will endeavor to furnish to the Contractor typed, hand written or recorded supplements to the punch list in a prompt manner; however, any delay in the Contractor's receiving said supplements from the Engineer will not be cause for a claim for additional cost or extension of time as the Contractor's Superintendent shall have been in attendance during the inspections of the Engineer and his Consultants and will have been expected to take his own notes.

2.3 OPERATIONS AND MAINTENANCE MANUALS

A. Operation and Maintenance (O&M) Manuals shall be delivered prior to, and are a condition of, Substantial Completion to allow the Owner the benefit of having the manuals for on-site training and start-up procedures provided by the Contractor.

B. Refer to Section 01 78 23 – Operating and Maintenance Manuals.

2.4 SUBSTANTIAL COMPLETION SCHEDULE

A. After the date of Substantial Completion of the project as evidenced by the Certificate of Substantial Completion, AIA document G704-2000, the Contractor will be allowed a period of thirty (30) days, unless extended by mutual agreement or provision of the Contract, within which to complete all work and correct all deficiencies contained in the Punch List attached to the Certificate of Substantial Completion.

B. It is incumbent upon the Contractor to request Substantial Completion only when there is assurance that all work included on the Punch List shall be completed within the thirty (30) day time frame.
   01 In the event the Owner must take occupancy of the project prior to Contractor's completion of the punch list, the Contractor shall make all adjustments necessary to schedule the work to allow full and normal operation of the project by the Owner.
   02 Where this requires work outside of normal business hours, the work shall be provided at no additional costs to the Owner.

C. Upon Contractor's and sub-contractor's verification that all punch list items have been 100% completed, the Contractor shall notify the Engineer; and the Engineer and consultant(s) shall conduct an on-site observation to verify that all items are 100% complete.
   01 On-site verifications for partial completions, if any, shall be conducted by the Engineer at the Engineer's sole discretion.

02 If any items shown to be complete by the Contractor are found not to be complete by the Engineer, the observation shall be stopped, with such notification to the Contractor.

03 Contractor's requested punch list observations by the Engineer shall be limited to a maximum of two (2) per punch list.

PART 3 – CONTRACT CLOSE-OUT

3.1 GENERAL

A. Upon issuance of the (final) Certificate of Substantial Completion, and per the Owner-Contractor Agreement, the Contractor will be allowed a period of sixty (60) days within which to complete all Contract Close-Out requirements, unless extended by mutual agreement or provision of the Contract.

B. In addition to all work and requirements described for Substantial Completion, in order to achieve Contract Close-Out, the Contractor shall submit the following Close-Out documents:

01 Tab 1: Copy of executed Certificate of Substantial Completion. And copy of all final punch lists showing final approval / acceptance of each item by sub-contractor, Contractor and Engineer / Engineer's Consultant.

02 Tab 2: Copy of all building permits.

03 Tab 3: Copy of all Certificates of Occupancy.

04 Tab 4: Final list of sub-contractors - alphabetical listing. List shall contain company name, address, phone number, contact person, relative specification section number, and description of work provided.

05 Tab 4: Final list of sub-contractors - specification section number listing in order. List shall contain company name, address, phone number, contact person, and description of work provided.

06 Tab 5: AIA G707-1994 Consent of Surety to Final Payment. Must be notarized.

07 Tab 5: AIA G706-1994 Contractor's Affidavit of Payment of Debts and Claims. Must be notarized.

08 Tab 6: AIA G706A-1994 Contractor's Affidavit of Release of Liens. Must be notarized.

09 Tab 7: Subcontractors' Affidavit of Release of Liens. Must be notarized.

10 Tab 7: Material / Equipment Suppliers Affidavit of Release of Liens. Must be notarized.

11 Tab 8: General Contractor's written warranty / guarantee.

12 Tab 9: Subcontractors' written warranties / guarantees.

13 Tab 10: Manufacturer's written warranties to the Owner for each product / assembly / system warranty required in individual specification sections. Organize each manufacturer's written warranty in numerical order corresponding to specification sections and identify each warranty with the specification section.

14 Tab 11: If asbestos abatement was performed, provide a copy of all applicable governmental forms, final test reports and certifications.

15 Tab 12: Contractor's Affidavit of Hazardous Material Must be notarized.

16 Tab 13: Subcontractors and suppliers Affidavits stating that no asbestos products have been installed in this project. Must be notarized.

17 Tab 14: Owner demonstration and / or training verification. Provide sign-in sheet for all demonstrations and training sessions conducted for the Owner.

18 Tab 15: Extra stock verifications of product delivery to Owner.

19 Record Drawings. Refer to section 3.4 below. Not bound in close-out manual(s).

20 Owner's set of record submittals. Not bound in close-out manual(s).

C. Final / 100% release of retainage will not be authorized by the Engineer until the Contractor completes all of the requirements for Contract Close-out; and until all expenses incurred and to be paid by the Contractor have been paid in full.

D. It is the Contractor's sole responsibility <u>prior to submission</u> to verify that Close-Out documents proposed to be furnished for review and acceptance are 100% complete and accurate.

01 If during review the Engineer or Engineer determines the Close-Out documents are incomplete and / or inaccurate, the review shall cease and the Contractor shall be so notified to retrieve the Close-Out Documents, make corrections and resubmit.

02 It is not the A/E Consultants' responsibility to return a list of missing and / or incorrect items.

E. It is desirable and beneficial to submit all Close-Out documents as a single submission; Close-Out documents may be submitted separately in four (4) deliverables as follows:

01 Close-Out Manual

02 Operations and Maintenance Manuals (required prior to Substantial Completion)

03 Record Drawings

04 Owner's Record Copy of Submittals

3.2 CLOSE-OUT MANUAL(S) FORMAT

A. All close-out documents shall be submitted in three ring binders with detailed table of contents, index tabs corresponding to the table of contents.

01 Documents shall be separated by tabs as indicated in section 3.1 above.

02 The close-out documents must be neatly organized and easily useable, as determined by the Engineer and Owner.

03 Each binder shall include an insert cover with the following information

a. Project name

b. Binder Title: Close-Out Manual

c. Engineer's name

d. Engineer's project number

e. Contractor's name, address and phone number

04 Each binder shall include an insert in the binder spine with the following information

a. Project name

b. Binder Title: Close-Out Manual

05 Inside cover page containing the following:

a. Project name

b. Contractor's address and contact information

c. Contractor's project manager and superintendent name and contact information.

d. Engineer's project manager name and contact information.

e. Each consultant's project manager name and contact information.

06 Table of Contents and corresponding section tabs shall be in the same order as described in section 3.1-B above.

07 Number of binders required: two.

08 Number of CD's required: three.

3.3 WARRANTIES

A. All guarantees and warranties required by the Contract Documents shall establish the date of Substantial Completion as day one (1) of the required warranty period; regardless of how long the product, assembly or work has been installed or in operation prior to Substantial Completion.

01 Coordinate with subcontractors and material suppliers to account for provision in their original proposal / bid amount, if necessary.

B. Contractor's One-Year Warranty: The Contract requires the General Contractor to warrant ALL materials and work provided / furnished for a period of one (1) year following the date of Substantial Completion.

01 The one year general warranty shall include all labor, material and delivery costs required to correct defective material or installation during the Warranty period.

C. Sub-Contractor's One-Year Warranty: each sub-contractor that performed work on the project shall be required to submit a one-year warranty similar to the above Contractor's One-Year Warranty for their specific work provided.

D. Extended Warranties: In addition to the General Contractor's and subcontractors' one-year warranty, other required guarantees shall be included in the Close-Out Binder in original issue form. All extended warranties shall begin on the Substantial Completion date; and shall include all labor, material and delivery costs required to correct defective material or installation. Guarantees include but are not limited to:

01 Roofing – Certification from the Roofing Manufacturer that the work performed as part of this Contract is accepted and incorporated into the existing roof warranty. Provide separate certification for each campus.
02 Glazing - 2 Years
03 Dampproofing and Waterproofing - 2 Years
04 Sealants - 2 Years
05 Plastic-Faced Wood Doors - life of the doors
06 Painting and Staining -2 Years
07 Carpeting -10 Years
08 Division 22 - Plumbing Systems - as specified
09 Division 23 - Mechanical Systems - as specified
10 Division 26 - Electrical Systems - as specified

3.4 RECORD DRAWINGS:

A. Upon Substantial Completion, the Contractor shall be furnished, at no charge, a complete set of electronic files in AutoCAD release 2010 or later, or Revit if applicable, of all drawings included in the Contract Documents. The title blocks shall be stripped of all logos, disclaimers and licensed seals of the Engineer and Consultants.

01 Applicable CTB or plot files shall be furnished by the Engineer and each Consultant.
02 Throughout the construction phase, Engineer's and Consultant's supplemental drawings / sketches provided to the Contractor in AutoCAD or Revit format shall already be incorporated in the electronic files provided to the Contractor.

B. Upon request, the Engineer and / or Consultants shall assist the Contractor with understanding the structure and composition of the electronic files to facilitate the generation of the Record Drawings.

C. The Contractor shall modify the title block on each / every sheet to include only the project name, project address, school district, consultants' name and address, date, and clearly identify the set as "Record Drawings".

D. All electronic Record Drawing work shall be performed in a professional manner using AutoCAD or Revit, as applicable, and shall maintain the format / structure / composition of the original Contract Document drawings.

E. All modifications, additions, deletions and revisions made to the project during the construction phase shall be reflected on the Record Drawings; and shall include, but not necessarily limited to:

01 All as-built dimensions (different than original dimensions)
02 All as-built locations and conditions relative to underground plumbing, sanitary and storm piping installations, natural gas piping and electrical conduits; shown accurately to within twelve inches (12"). Notes shall indicate approximate depth of all underground piping and utilities.
03 All as-built conditions relative to ductwork installations; shown accurately to within six inches (6").
04 All as-built conditions relative to HVAC water piping installations; shown accurately to within six inches (6").

05 All as-built conditions relative to underground electrical conduit installations; shown accurately to within six inches (6").
06 Record drawings shall include a copy of fire sprinkler layout of piping and equipment.
07 All approved CPR's resulting in a physical change in the Work.
08 All RFI's resulting in a physical change in the Work.
09 All AEA's resulting in a physical change in the Work.
10 All Minor Changes resulting in a physical change in the Work.
11 All Construction Change Directives resulting in a physical change in the Work.
12 Update the list of drawings as necessary to reflect added and deleted sheets.

F. All modifications shall be represented by actually deleting the original work and accurately depicting the revised as-built modifications / configurations. "X-ing out" deleted work shall not be accepted

G. Provide the Record Drawings with all revision clouds and other change identifiers removed.

H. Upon completion of all revisions to the Record Drawings, including the Engineer's acceptance, the Record Drawings shall be copied to a CD ROM disc maintaining the exact folder / file structure originally furnished to the Contractor. Submit to the Engineer for review before proceeding with deliverables.

I. Deliverables: Upon review and acceptance of the documentation, including format, the Engineer shall direct the Contractor to proceed with delivery of the following:
01 Three (3) CD's containing the entire set of Record Drawings in PDF format. Each sheet shall be a separate PDF file. The CD's shall be organized to duplicate the order of drawings as they were issued for bidding and construction, with record drawing modifications.
02 Three (3) CD's containing the entire set of Record Drawings in AutoCAD or Revit format as applicable. Each sheet shall be a separate AutoCAD or Revit file. The CD's shall be organized to duplicate the order of drawings as they were issued for bidding and construction, with record drawing modifications.
03 One (1) full-size, complete set of black-line copies on minimum 20 lb. bond paper. The set shall be plotted using the Contractor's CD to assure the files plot correctly. The set shall be screw-post bound.

3.5 RECORD SUBMITTALS

A. The Contractor shall maintain and submit a separate set of final submittals to be delivered to the Owner as a condition of Contract Close-Out.

B. Include only the final version of each submittal, including all submittal review comment sheets from the Engineer and Consultant. Versions of submittals that were rejected or required to be revised and resubmitted are not required.

C. Deliverables:
01 Deliver one (1) hard copy set of Record Submittals in file boxes, organized in order by specification division, with tabs included for each section of specifications.
02 Deliver three (3) copies of all Record Submittals in PDF electronic format on three (3) CD's.

3.6 TERMINAL INSPECTION

A. Approximately one (1) month prior to expiration of the one-year guarantee period, the Contractor shall notify the Engineer and Owner to schedule an inspection of the work in the company of the Engineer and the Owner. The Engineer and the Owner shall be given not less than ten (10) days' notice prior to the anticipated date of terminal inspection.

B. Where any portion of the work has proven to be defective and requires replacement, repair or adjustment, the Contractor shall immediately provide materials and labor necessary to remedy such defective work, and shall execute such work without delay until completed to the satisfaction of the Engineer and the Owner, even though the date of completion of the corrective work may extend beyond the expiration date of the guarantee period.

C. The Contractor shall not be responsible for correction of work which has been damaged because of neglect or abuse by the Owner, nor the replacement of parts necessitated by normal wear in use.

END OF SECTION

SECTION 23 01 00

HVAC OPERATING AND MAINTENANCE MANUALS

PART 1 - GENERAL

1.1 SECTION INCLUDES

A. Compilation product data and related information appropriate for Owner's operation and maintenance of products furnished under Contract. Prepare operating and maintenance data as specified.

B. Instruct Owner's personnel in operation and maintenance of equipment and systems.

C. Submit three copies of complete manual in final form.

1.2 SUBMITTALS

A. Thirty (30) days after the Contractor has received the final scheduled identified submittals bearing the Architect/Engineer's stamp of acceptance (including resubmittals), submit for review one copy of the first draft of the Operating and Maintenance Manual. This copy shall contain as a minimum:
   1. Table of Contents for each element.
   2. Contractor information.
   3. All submittals, coordination drawings and product data, reviewed by the Architect/Engineer; bearing the Architect/Engineer's stamp of acceptance. (When submittals are returned from Engineer "Correct as Noted", corrected inserts shall be included.)
   4. All parts and maintenance manuals for items of equipment.
   5. Warranties (without starting dates)
   6. Certifications that have been completed. Submit forms and outlines of certifications that have not been completed.
   7. Operating and maintenance procedures.
   8. Form of Owner's Training Program Syllabus (including times and dates).
   9. Control operations/equipment wiring diagrams.
   10. Schedule of filters for each item of equipment.
   11. Schedule of belts for each item of equipment.
   12. Other required operating and maintenance information that are complete.

B. Copy will be returned to the Contractor within 15 days with comments for corrections.

C. Submit three (3) completed manuals in final form to the Architect/Engineer one day after substantial completion, and prior to Owner's instructions. Include all specified data, test and balance reports, drawings, dated warranties, certificates, reports, along with other materials and information.

D. The Architect/Engineer will review the manuals for completeness within fifteen (15) days.

E. The Contractor shall be notified of any missing or omitted materials. The Manuals shall be reworked by the Contractor, as required, in the office of the Architect / Engineer. The manuals will not be retransmitted.

F. Two (2) complete Manuals will be delivered to the Owner.

PART 2 - PRODUCTS

2.1 BINDERS

A. Commercial quality black three-ring binders with clear overlay plastic covers.

B. Minimum ring size: 1"; Maximum ring size: 3".

C. When multiple binders are used, correlate the data into related groupings.

D. Label contents on spine and face of binder with full size insert. Label under plastic cover.

PART 3 - EXECUTION

3.1 OPERATION AND MAINTENANCE MANUAL

A. Form for Manuals:
1. Prepare data in form of an instructional manual for use by Owner's personnel.
2. Format:
   a. Size: 8-1/2" x 11".
   b. Text: Manufacturer's printed data or neatly typewritten.
3. Drawings:
   a. Provide reinforced punched binder tab and bind in text.
   b. Fold larger drawings to size of text pages.
4. Provide flyleaf indexed tabs for each separate product or each piece of operating equipment.
5. Cover: Identify each volume with typed or printed title "Operating and Maintenance Instructions". List:
   a. Title of Project
   b. Identity of separate structures as applicable.
   c. Identity of general subject matter covered in the manual.
6. Binder as specified.

B. Content of Manual:
1. Neatly typewritten Table of Contents for each volume arranged in systematic order as outlined in the specifications.
   a. Contractor, name of responsible principal, address and telephone number.
   b. A list of each product required to be included, indexed to content of the volume.
   c. List with each product, name, address and telephone number of:
      1) Subcontractor or installer.
      2) Maintenance contractor as appropriate.
      3) Identify area of responsibility of each.
      4) Local source of supply for parts and replacement.
   d. Identify each product by product name and other identifying symbols as set forth in Contract Documents.
2. Product Data:
   a. Include those sheets pertinent to the specific product.
   b. Annotate each sheet to:
      1) Identify specific product or part installed.
      2) Identify data applicable to installation.
      3) Delete references to inapplicable information. (All options not supplied with equipment shall be marked out indicated in some manner.
3. Drawings:
   a. Supplement product data with drawings as necessary to illustrate:
      1) Relations of component parts of equipment and systems.
      2) Control and flow diagrams.
   b. Coordinate drawings with information in Project Record Documents to assure correct illustration of completed installation.
   c. Do not use Project Record Documents as maintenance drawings.

4. Written text, as required to supplement product data for the particular installation:
    a. Organize in consistent format under separate headings for different procedures.
    b. Provide logical sequence of instructions for each procedure.
5. Copy of each warranty, bond and service contract issued.
    a. Provide information sheet for Owner's personnel, giving:
        1) Proper procedures in event of failure.
        2) Instances that might affect validity of warranties or bonds.
6. Shop drawings, coordination drawings and product data as specified.

C. Sections for Equipment and Systems.
1. Content for each unit of equipment and system as appropriate:
    a. Description of unit and component parts.
        1) Function, normal operating characteristics, and limiting conditions.
        2) Performance curves, engineering data and tests.
        3) Complete nomenclature and commercial number of replaceable parts.
    b. Operating procedures:
        1) Start up, break-in, routine and normal operating instructions.
        2) Regulation, control, stopping, shut down and emergency instructions.
        3) Summer and winter operating instructions.
        4) Special operating instructions.
    c. Maintenance procedures:
        1) Routine operations
        2) Guide to trouble-shooting.
        3) Disassembly, repair and reassembly.
        4) Alignment, adjusting and checking.
        5) Routine service based on operating hours.
    d. Servicing and lubrication schedule. List of lubricants required.
    e. Manufacturer's printed operating and maintenance instructions.
    f. Description of sequence of operation by control manufacturer.
    g. Original manufacturer's parts list, illustrations, assembly drawings and diagrams required for maintenance.
        1) Predicted life of part subject to wear.
        2) Items recommended to be stocked as spare parts.
    h. As installed control diagrams by controls manufacturer.
    i. Complete equipment internal wiring diagrams.
    j. Schedule of filters for each air handling system.
    k. Schedule of belts for each item of equipment.
    l. Each Contractor's coordination drawings.
    m. As installed color coded piping diagrams.
    n. Charts of valve tag number, with location and function of each valve.
    o. List of original manufacturer's spare parts and recommended quantities to be maintained in storage.
    p. Other data as required under pertinent sections of the specifications.
2. Prepare and include additional data when the need for such data becomes apparent during instruction of Owner's personnel.
3. Additional requirements for operating and maintenance data as outlined in respective sections of specifications.
4. Provide complete information for products specified in Division 23.
5. Provide certificates of compliance as specified in each related section.
6. Provide start up reports as specified in each related section.
7. Provide signed receipts for spare parts and material.
8. Provide training report and certificates.
9. Provide extended compressor warranty certificates.

END OF SECTION

SECTION 23 05 00

MECHANICAL GENERAL PROVISIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Except as modified in this Section, General Conditions, Supplementary Conditions, applicable provisions of the General Requirements, and other provisions and requirements of the contract documents apply to work of Division 23 Mechanical.

B. Applicable provisions of this section apply to all sections of Division 23, Mechanical.

1.2 CODE REQUIREMENTS AND FEES

A. Perform work in accordance with applicable statutes, ordinances, codes and regulations of governmental authorities having jurisdiction.

B. Mechanical work shall comply with applicable inspection services:
1. Underwriters Laboratories
2. National Fire Protection Association
3. State Health Department
4. Local Municipal Building Inspection Department
5. Texas Department of Licensing & Regulations (ADA)

C. Resolve any code violations discovered in contract documents with the Engineer prior to award of the contract. After Contract award, any correction or additions necessary for compliance with applicable codes shall be made at no additional cost to the Owner.

D. This Contractor shall be responsible for being aware of and complying with asbestos NESHAP regulations, as well as all other applicable codes, laws and regulations.

E. Obtain all permits required.

1.3 CONTRACTOR'S QUALIFICATIONS

A. An approved contractor for the work under this division shall be:
1. A specialist in this field and have the personnel, experience, training, skill, and organization to provide a practical working system
2. Able to furnish evidence of having contracted for and installed not less than 3 systems of comparable size and type that has served their Owners satisfactorily for not less than 3 years

1.4 REFERENCE SPECIFICATIONS AND STANDARDS

A. Materials which are specified by reference to Federal Specifications; ASTM, ASME, ANSI, or AWWA Specifications; Federal Standards; or other standard specifications must comply with latest editions, revisions, amendments or supplements in effect on date bids are received. Requirements in reference specifications and standards are minimum for all equipment, material, and work. In instances where specified capacities, size, or other features of equipment, devices, or materials exceed these minimums, meet specified capacities.

1.5 CONTRACT DRAWINGS

A. Contract drawings are diagrammatic only and do not give fully dimensioned locations of various elements of work. Determine exact locations from field measurements.

1.6 PROJECT RECORD DOCUMENTS

A. Maintain at the job site a separate set of white prints (black line) of the contract drawings for the sole purpose of recording the "as-built" changes and diagrams of those portions of work in which actual construction is at variance with the contract drawings. Mark the drawings with a colored pencil. Prepare, as the work progresses and upon completion of work, reproducible drawings clearly indicating locations of various lines, valves, ductwork, traps, equipment, and other pertinent items, as installed. Include flow-line elevation of sewer lines. Record existing and new underground and under slab piping with dimensioned locations and elevations of such piping.

B. At the conclusion of project, obtain without cost to the Owner, erasable mylars of the original drawings and transfer as-built changes to these. Prior to transmittal of corrected drawings, obtain 3 sets of blue-line prints of each drawing, regardless of whether corrections were necessary and include in the transmittal (2 sets are for the Owner's use and one set is for the Architect/Engineer's records). Delivery of these as-built prints and reproducibles is a condition of final acceptance. Provide record drawings on one set each (reproducible Dayrex mylar film positives) and AutoCad 2014 / Revit CAD files on disk (CD Rom).

C. As-Built drawings should indicate the following information as a minimum:
1. Indicate all addendum changes to documents.
2. Remove Engineer’s seal, name, address and logo from drawings.
3. Mark documents RECORD DRAWINGS.
4. Clearly indicate: DOCUMENT PRODUCED BY
5. Indicate all changes to construction during construction. Indicate actual routing of all piping, ductwork, etc. that were deviated from construction drawings.
6. Indicate exact location of all underground mechanical piping and elevation.
7. Indicate exact location of all underground electrical raceways and elevations.
8. Correct schedules to reflect (actual) equipment furnished and manufacturer.
9. Location and size of all ductwork and mechanical piping above ceiling including exact location of isolation of domestic and mechanical valves.
10. Exact location of all electrical equipment in and outside of the building.
11. Exact location of all roof mounted equipment, wall, roof and floor penetrations.
12. Cloud all changes.

1.7 SPACE REQUIREMENTS

A. Consider space limitations imposed by contiguous work in selection and location of equipment and material. Do not provide equipment or material that is not suitable in this respect.

1.8 RELATION WITH OTHER TRADES

A. Carefully study all matters and conditions concerning the project. Submit notification of conflict in ample time to prevent unwarranted changes in any work. Review other Divisions of these specifications to determine their requirements.

B. Because of the complicated relationship of this work to the total project, conscientiously study the relation and cooperate as necessary to accomplish the full intent of the documents.

C. Provide sleeves and inserts in forms as required for the work. Stub up and protect open ends of pipe before any concrete is placed. Furnish sizes of required equipment pads. Furnish and locate bolts and fittings required to be cast in them.

D. Locate and size openings required for installation of work specified in this Division in sufficient time to prevent delay in the work.

E. Refer to other Divisions of the specifications for the scope of required connections to equipment furnished under that Division. Determine from the Contractor for the various trades, the Owner, and by direction from the Architect/Engineer, the exact location of all items.

1.9 CONCEALED AND EXPOSED WORK

A. When the word "concealed" is used in connection with insulating, painting, piping, ducts and the like, the work is understood to mean hidden from sight as in chases, furred spaces or above ceilings. "Exposed" is understood to mean open to view.

1.10 GUARANTEE

A. Guarantee work for 1 year from the date of substantial completion of the project. During that period make good any faults or imperfections that may arise due to defects or omissions in material, equipment or workmanship. At the Owner's option, replacement of failed parts or equipment shall be provided.

1.11 MATERIAL AND EQUIPMENT

A. Furnish new and unused materials and equipment meeting the requirements of the paragraph specifying acceptable manufacturers. Where two or more units of the same type or class of equipment are required, provide units of a single manufacturer.

1.12 NOISE AND VIBRATION

A. Select equipment to operate with minimum noise and vibration. If objectionable noise or vibration is produced or transmitted to or through the building structure by equipment, piping, ducts or other parts of work, rectify such conditions at no additional cost. If the item of equipment is judged to produce objectionable noise or vibration, demonstrate at no additional cost that equipment performs within designated limits on a vibration chart.

1.13 ACCEPTABLE MANUFACTURERS

A. Manufacturers names and catalog number specified under sections of Division 23 are used to establish standards of design, performance, quality and serviceability and not to limit competition. Equipment of similar design, equal to that specified, manufactured by a named manufacturer will be acceptable on approval. A request for prior approval of equipment not listed must be submitted ten (10) days before bid due date. Submit complete design and performance data to the Engineer.

1.14 OPERATING TESTS

A. After all mechanical systems have been completed and put into operation, subject each system to an operating test under design conditions to ensure proper sequencing and operation throughout the range of operation. Tests shall be made in the presence of the Architect/Engineer. Make adjustments as required to ensure proper functioning of all systems. Special tests on individual systems are specified under individual sections. Submit 3 copies of all certifications and test reports adequately in advance of completion of the work to allow for remedial action as required to correct deficiencies discovered in equipment and systems.

1.15 WARRANTIES

A. Submit 3 copies of all warranties and guarantees for systems, equipment, devices and materials.

These shall be included in the Operating and Maintenance Manuals.

1.16 BUILDING CONSTRUCTION

A. It shall be the responsibility of each sub-contractor to consult the Architectural and Engineering drawings, details, and specifications and thoroughly familiarize himself with the project and all job related requirements. Each sub-contractor shall cooperate with the General Contractor to verify that all piping and other items are placed in the walls, furred spaces, chases, etc., so there will be no delays in the job.

PART 2 - PRODUCTS – NOT USED

PART 3 - EXECUTION

3.1 OPENINGS

A. Framed, cast or masonry openings for ductwork, equipment or piping are specified under other divisions. Drawings and layout work for exact size and location of all openings are included under this division.

3.2 AIR FILTERS AND PIPE STRAINERS

A. Immediately prior to substantial completion of the project, inspect, clean and service air filters and strainers. Replace air filters.

3.3 LUBRICATION, REFRIGERANT AND OIL

A. Provide a complete charge of correct lubricant for each item of equipment requiring lubrication.

B. Provide a complete and working charge of proper refrigerant, free of contaminants, into each refrigerant system. After each system has been in operation long enough to ensure completely balanced conditions, check the charge and modify for proper operation as required.

C. Provide a complete charge of special oil for refrigeration use, suitable for operation with refrigerant, in each system.

3.4 HOUSEKEEPING PADS

A. Provide equipment housekeeping pads under all floor mounted and ground mounted HVAC equipment, and as shown on the drawings.

B. Concrete work as specified in Division 3.

C. Concrete pads:
1. 4" high, rounded edges, minimum 2500 psi unless otherwise indicated on the drawings
2. Chamfer strips at edges and corner of forms.
3. Smooth steel trowel finish.
4. Doweled to existing slab

D. Install concrete curbs around duct penetrations or multiple pipe penetrations.

3.5 INSTRUCTION OF OWNER'S PERSONNEL

A. Prior to final inspection, conduct an on-site training program to instruct the Owner's operating personnel in the operation and maintenance of the mechanical systems.

1. Provide the training during the Owner's regular working day.
2. The Instructors shall each be experienced in their phase of operation and maintenance of building mechanical systems and with the project.

B. Time to be allocated for instructions.
1. Minimum of 40 hours dedicated instructor time.
2. 8 hours on each of 5 days.

C. Before proceeding with the on-site training program, submit the program syllabus; proposed time and dates; and other pertinent information for review and approval.
1. One copy to the Owner.
2. One copy to the Architect/Engineer.

D. The Owner will provide a list of personnel to receive instructions, and will coordinate their attendance at the agreed upon times.

E. Use the operation and maintenance manuals as the basis of instruction. Review contents of manual with personnel in detail to explain all aspects of operation and maintenance.

F. Demonstrate start-up, operation, control, adjustment, trouble-shooting, servicing, maintenance, and shut down of each item of equipment.

G. Demonstrate equipment functions (both individually and as part of the total integrated system).

H. Prepare and insert additional data in the operating and maintenance manuals when the need for additional data becomes apparent during instructions.

I. Submit a report within one week after completion of the training program that instructions have been satisfactorily completed. Give time and date of each demonstration and hours devoted to the demonstration, with a list of people present.

J. At the conclusion of the on-site training program, have the person designated by the Owner sign a certificate to certify that he/she has a proper understanding of the system, that the demonstrations and instructions have been satisfactorily completed, and the scope and content of the operating and maintenance manuals used for the training program are satisfactory.

K. Provide a copy of the report and the certificate in an appropriately tabbed section of each Operating and Maintenance Manual.

3.6 EQUIPMENT IDENTIFICATION

A. Provide a laminated engraved plastic nameplate on each piece of equipment and starter.
1. Designation approved by Architect/Engineer.
2. Equipment includes, but is not limited to, air handling units, fan coil units, variable volume boxes, fans, pumps, boilers and chillers.
3. Submit schedule of equipment to be included and designations.

B. Provide nameplates with 1/2" high letters and fastened with epoxy or screws.

3.7 OBSTRUCTIONS

A. The drawings indicate certain information pertaining to surface and subsurface obstructions which has been taken from available drawings. Such information is not guaranteed, however, as to accuracy of location or complete information.
1. Before any cutting or trenching operations are begun, verify with Owner's representative,

utility companies, municipalities, and other interested parties that all available information has been provided.

2. Should obstruction be encountered, whether shown or not, alter routing of new work, reroute existing lines, remove obstruction where permitted, or otherwise perform whatever work is necessary to satisfy the purpose of the new work and leave existing services and structures in a satisfactory and serviceable condition.

B. Assume total responsibility for and repair any damage to existing utilities or construction, whether or not such existing facilities are shown.

3.8 PROTECTION

A. Protect work, equipment, fixtures, and materials. At work completion, work must be clean and in original manufacturer's condition.

3.9 INDOOR AIR QUALITY

A. All equipment and ductwork shall be installed to allow sufficient space for testing, maintenance, and commissioning functions. Access doors or panels shall be installed in ventilation equipment, ductwork, and plenum enclosures for inspection and cleaning of outdoor air intakes, mixing plenums, up and downstream of coils, filters, drain pans and fans.

B. Practice source control and eliminate potential contaminants in material selection, installation, and maintenance.

C. Provide installation and disposal instructions for all materials and chemicals that are potential contaminants.

D. Obtain and conform to the requirements of the Material Safety Data Sheets (MSDSs) in the use of materials.

E. Utilize manufacturer’s recommendations and provide installation instructions for all chemicals, compounds, and potential contaminants including pre-installation degassing if required.

F. Ventilate completed building prior to final completion using no less than design outside air for at least 48 hours before occupancy.

G. Make provisions for controls to prevent the entry of air contaminants into the HVAC air distribution system.

H. Steps shall be taken to ensure that the HVAC system continues to function effectively and are not damaged or contaminated during construction activities.

END OF SECTION

SECTION 23 05 10

HVAC CONTRACT QUALITY CONTROL

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Contract quality control including workmanship, manufacturer's instructions, mock-ups and demonstrations.

1.2 QUALITY CONTROL PROGRAM

A. Maintain quality control over supervision, subcontractors, suppliers, manufacturers, products, services, site conditions and workmanship to produce work in accordance with contract documents.

1.3 WORKMANSHIP

A. Comply with industry standards except when more restrictive tolerances or specified requirements indicate more rigid standards or more precise workmanship.

B. Perform work by persons qualified to produce workmanship of specified quality.

C. Secure products in place with positive anchorage devices designed and sized to withstand stresses, vibration, and racking. Under no conditions shall material or equipment be suspended from structural bridging.

D. Provide finishes to match approved samples. All exposed finishes shall be approved by the Architect. Submit color samples as required.

1.4 MANUFACTURER'S INSTRUCTIONS

A. Comply with instructions in full detail, including each step in sequence.

B. Should instruction conflict with Contract Documents, request clarification from Architect / Engineer before proceeding.

1.5 MANUFACTURER'S CERTIFICATES

A. When required in individual Specification Sections, submit manufacturer's certificate in duplicate, certifying that products meet or exceed specified requirements.

1.6 MANUFACTURER'S FIELD SERVICES

A. When required in individual Specification Sections, manufacturer shall provide qualified personnel to observe:
   1. Field conditions.
   2. Condition of installation.
   3. Quality of workmanship.
   4. Start-up of equipment.
   5. Testing, adjusting, and balancing of equipment.

B. Representative shall make written report of observations and recommendations to Architect / Engineer.

1.7 MOCK-UPS

A. Assemble and erect the specified equipment and products complete, with specified anchorage and support devices, seals and finishes.

B. Do not proceed with any work involving a mock-up, until the related mock-up has been approved in writing.

C. Acceptable mock-ups in place shall be retained in the completed work.

D. Perform tests and submit results as specified.

1.8 SCHEDULING OF MOCK-UPS

A. Schedule demonstration and observation of mock-ups, in phases, with Architect / Engineer.
   1. Rough-in.
   2. Finish with all appurtenances in place.
   3. Insulation installed.
   4. Demonstrations.

PART 2 - PRODUCTS

2.1 REFERENCE APPLICABLE SPECIFICATION SECTIONS.

PART 3 - EXECUTION

3.1 FAN/COIL UNITS (WATER SOURCE HEAT PUMPS)

A. Mock-up a fan/coil unit (water source heat pump) completely installed, including:
   1. Primary, secondary and auxiliary drain pans.
   2. Piping connections; including all piping appurtenances.
   3. Pipe insulation.
   4. Condensate drain piping.
   5. Electrical connections.
   6. Duct connection beyond first transition.
   7. Block valves, balancing valves, and control valves.
   8. Cabinet/internal vibration isolation.
   9. Suspension system.

B. Tests: Air flow at scheduled static pressure.

C. Demonstrate:
   1. Filter accessibility.
   2. Accessibility to drain and components for service.
   3. Controls sequence.

3.2 AIR HANDLING UNIT

A. Mock-up an air handling unit, completely installed, including:
   1. Piping connections; including thermowells, test stations, test wells and other piping appurtenances.
   2. Pipe insulation.
   3. Condensate drain piping.
   4. Electrical connections.
   5. Ductwork beyond the first transition.
   6. Control valves and bypass.

7. Cabinet/internal vibration isolation.
8. Block valves and balancing valves.
9. Duct insulation.
10. Instrumentation.

B. Tests: Air flow at scheduled static pressure.

C. Demonstrate:
1. Filter accessibility.
2. Accessibility to drain and components for service.
3. Controls sequence.

3.3 CONSTANT VOLUME TERMINAL BOX

A. Mock-up a Constant Volume Terminal Box completely installed, including:
1. Piping connections, including all piping appurtenances.
2. Pipe insulation.
3. Electrical connections.
4. Duct connection beyond first transition.
5. Block valves, balancing valves, and control valves.
6. Cabinet/internal vibration isolation.
7. Suspension system.

B. Tests: Air flow at scheduled static pressure.

C. Demonstrate:
1. Control Sequence.
2. Accessibility to components for service.

3.4 HOT AND CHILLED WATER CIRCULATING PUMPS

A. Mock-up one each system pump, completely installed including:
1. Pump mounted on housekeeping pad.
2. Auxiliary drain pan. (Chilled water only)
3. Piping to a point beyond the complete valve and instrumentation assemblies.
4. Strainers with blowdown.
5. Flexible piping connection.
6. Pipe supports.
7. Pipe insulation.
8. Pump painting.
9. Electrical connections.

3.5 PROTECTION OF EQUIPMENT

A. Do not deliver equipment to the project site until progress of construction has reached the stage where equipment is actually needed or until building is closed in enough to protect the equipment from weather. Equipment allowed to stand in the weather will be rejected, and the Contractor is obligated to furnish new equipment of a like kind at no additional cost to the Owner.

B. Adequately protect equipment from damage after delivery to the project. Cover with heavy tarpaulins, drop cloths or other protective coverings as required to protect from plaster, paint, mortar and/or dirt. Do not cover with plastic materials and trap condensate and cause corrosion.

END OF SECTION

SECTION 23 05 11

MECHANICAL ALTERATIONS PROJECT PROCEDURES

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Inspect and service existing equipment and materials that are to remain or to be reused.

B. Disposal of equipment, materials, or housekeeping pads to be abandoned. Prior to disposal, the Contractor shall verify with the Owner what is to be salvaged by the Owner and what is to become the property of the Contractor.

C. Handling of equipment and materials to be removed.

1.2 QUALITY ASSURANCE

A. Coordination with the Owner prior to the disconnection or shutdown of existing equipment, or to the modification of existing operational systems.

1.3 CONTRACT DRAWINGS

A. There is the possibility that existing conditions and devices are affected by the work indicated on the drawings and called for in the specifications (project manual) which do not appear on the drawings. It is the Contractor's responsibility to visit the site and determine all of the existing conditions and to consider these existing conditions when making and presenting a proposal, to have a complete proposal.

PART 2 - PRODUCTS

2.1 MATERIALS AND EQUIPMENT

A. Material used to upgrade and repair existing equipment shall conform to that specified.

B. Material used to upgrade and repair existing equipment shall not void existing warranties or listings of the equipment to be upgraded or repaired.

C. Material used to upgrade and repair existing equipment shall be new and shall be of the same manufacturer of the existing equipment, shall be acquired through the existing original equipment manufacturer's approved distribution channels, shall have manufacturer's warranties for the new material being used, and shall be listed for the use intended.

PART 3 - EXECUTION

3.1 INSPECTION

A. Existing materials and equipment indicated on the drawings or in the specifications to be reused shall be inspected for damaged or missing parts. Contractor shall notify the Architect/Engineer, in writing, accordingly.

B. If using materials specified or shown on the drawing voids or diminishes the warranty or operation of remaining equipment or systems, the Contractor shall notify the Architect/Engineer, in writing.

C. Verify field measurements, above and underground piping connections and flows.

D. Demolition Drawings are based on casual field observation, and when available, existing record documents. Report discrepancies to Architect before disturbing existing installation, and immediately after such discrepancies are discovered.

E. Field verify existing conditions and actual utility uses prior to final connections. Existing drawings may not have been available for all required information. Use pipe inspection camera system to field verify existing sanitary / grease waste connections. Verify actual HVAC supply and return piping connections. Verify flow direction and depth prior to connection to existing plumbing systems.

3.2 APPLICATION

A. Existing materials and equipment indicated on the drawings or in the specifications to be reused shall be cleaned and reconditioned, including cleaning of piping systems and HVAC coils prior to installation and reuse.

B. Material and equipment removed that is not to be salvaged for Owner's use or for reuse on the project shall become the property of the Contractor and be removed from the site.

C. Material or equipment salvaged for Owner's use shall be carefully handled and stored where directed by the Owner or the Architect / Engineer. Relocate material and / or equipment as directed by Owner.

D. Materials and equipment not indicated to be removed or abandoned shall be reconnected to the new system.

E. Materials, equipment and housekeeping pads not to be reused or reconnected shall be removed for Owner’s review and salvaged by Contractor.

F. Prior to start of construction, Contractor shall walk areas to be renovated with Owner to identify and document items to be salvaged for Owner’s use.

G. Clean and repair existing materials and equipment that remain or are to be reused.

H. Contractor shall utilize spaces efficiently to maximize accessibility for other installations, for maintenance, and for repairs.

3.3 SEQUENCE AND SCHEDULE

A. Coordinate utility service outages with Utility Company, Architect and Owner.

B. Provide additional or temporary valves, piping, ductwork and connections to maintain existing systems in service during construction.

C. Existing HVAC and Plumbing Service: Refer to drawings for work in remodeled areas. Where facilities in these areas are to remain in service, any related work to keep the facilities in operation is specified in this Division. Maintain existing system in service until new system is complete and ready for service. Disable system only to make switchovers and connections. Obtain permission from Owner at least 48 hours before partially or completely disabling system. Minimize outage duration. Make temporary connections to maintain service in areas adjacent to work area. Maintain acceptable temperature and humidity control within existing building during renovation activities.

D. Remove and replace existing Mechanical systems and appurtenances as occasioned by new or remodeled construction. Re-establish service that may be interrupted by remodeled construction.

E. Refer to other drawings series for work in remodeled areas. Where facilities in these areas are required to remain in service, any related work required to keep these facilities in operation is specified in this Division.

F. Remove and replace existing piping, grilles, boxes and ductwork coincident with the construction.

G. Remove or relocate existing piping, grilles, ductwork or housekeeping pads as occasioned by new or remodeled construction. Cap unused HVAC or domestic piping and duct beyond the new finish line.

H. Relocate all HVAC and or domestic piping, grilles, boxes and ductwork as required to accommodate new work requiring precedence.

I. Remove concrete housekeeping pad where materials or equipment have been removed.

J. Remove all known utilities, which do not provide service to the buildings that remain.

K. Remove existing plumbing or mechanical vent penetrations through roof not to be reused.

3.4 DEMOLITION AND EXTENSION OF EXISTING MECHANICAL WORK

A. The Contractor shall modify, remove, and/or relocate all materials and items so indicated on the drawings or required by the installation of new facilities. All removals and/or dismantling shall be conducted in a manner as to produce maximum salvage. Salvage materials shall remain the property of the Owner, and shall be delivered to such destination as directed by the Owner's representative unless they are not wanted, then it will be the responsibility of this Contractor to remove such items and properly dispose of them. Materials and/or items scheduled for relocation and which are damaged during dismantling or reassembly operations shall be repaired and restored to good operative condition. The Contractor may, at his discretion, and upon approval of the Owner's representative substitute new materials and/or items of like design and quality in lieu of materials and/or items to be relocated.

B. All items to be relocated shall be carefully removed in reverse to original assembly or placement and protected until relocated. The Contractor shall clean, repair, and provide all new materials, fittings, and appurtenances required to complete the relocations and to restore them to good operative order. All relocations shall be performed by workmen skilled in the work and in accordance with standard practice of the trades involved.

C. When items scheduled for relocation and/or reuse are found to be in damaged condition before work has been started on dismantling, the Contractor shall call the attention of the Owner's representative to such items and receive further instructions before removal. Items damaged in repositioning operations are the contractor's responsibility and shall be repaired or replaced by the contractor as approved by the owner's representative, at no additional cost to the Owner.

D. HVAC, Plumbing, piping, ductwork and appurtenances to be removed, salvaged, or relocated shall be removed to points indicated on the drawings, specified, or acceptable to the Owner's representative. Piping and ductwork not scheduled for reuse shall be removed to the points at which reuse is to be continued or service is to remain. Such services shall be sealed, capped, or otherwise tied-off or disconnected in a safe manner acceptable to the Construction Inspector. All disconnections or connections into the existing facilities shall be done in such a manner as to result in minimum interruption of services to adjacent occupied areas. Services to existing areas or facilities that must remain in operation during the construction period shall not be interrupted without prior specific approval of the Owner's representative hereinbefore specified.

E. Repair adjacent construction and finishes damaged during demolition and extension work.

F. Maintain access to mechanical installations that remain active. Modify installation or provide access panel as appropriate.

G. Extend existing installations using materials and methods compatible with existing mechanical installations, or as specified.

H. Existing mechanical piping and devices found to need additional hangers installed should be added at no additional cost to the Owner.

3.5 PROTECTION OF THE WORK

A. Provide adequate temporary support and auxiliary structure as necessary to ensure structural value or integrity of affected portion of work.

B. Provide devices and methods to protect other portions of work from damage.

C. Execute fitting and adjustment of products to provide a finished installation to comply with specified products, functions, tolerances and finishes.

3.6 IDENTIFICATION OF EQUIPMENT IN RENOVATED AREAS

A. Identification of Equipment: Provide new identification of all existing equipment to be reused and located within the renovated areas. Do not include the description “existing”. Provide new nameplates for all existing mechanical equipment in renovated areas as specified in Section 23 05 00 Mechanical General Provisions.

3.7 REFRIGERANT DISPOSAL

A. Contractor shall dispose of refrigerant from all DX equipment including refrigerant piping per OSHA, EPA, Federal, State and Local Codes.

END OF SECTION

SECTION 23 05 12

SHOP DRAWINGS, COORDINATION DRAWINGS & PRODUCT DATA

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Prepare submittals as required by these specifications as outlined below.

B. The term submittal, as used herein, refers to all:
1. Shop Drawings
2. Coordination Drawings
3. Product data

C. Submittals shall be prepared and produced for:
1. Distribution as specified
2. Inclusion in the Operating and Maintenance Manual, as specified, in the related section

1.2 SHOP DRAWINGS

A. Present drawings in a clear and thorough manner. Identify details by reference to sheet and detail, schedule, or room numbers shown on Contract Drawings.

B. Show all dimensions of each item of equipment on a single composite Shop Drawing. Do not submit a series of drawings of components.

C. Identify field dimensions; show relationship to adjacent features, critical features, work, or products.

D. Submit shop drawings in plan, elevation and sections, showing equipment in mechanical equipment areas.

1.3 COORDINATION DRAWINGS

A. Present in a clear and thorough manner. Title each drawing with project name. Identify each element of drawings by reference to sheet number and detail, or room number of contract documents. Minimum drawing scale: ¼” = 1’-0”.

B. Prepare coordination drawings to coordinate installations for efficient use of available space, for proper sequence of installation, and to resolve conflicts. Coordinate with work specified in other sections and other divisions of the specifications.

C. For each mechanical room and for each outside equipment pad where equipment is located, submit plan and elevation drawings. Show:
1. Actual mechanical equipment and components to be furnished
2. Service clearance
3. Relationship to other equipment and components
4. Roof drains and leader piping
5. Fire protection piping and equipment

D. Identify field dimensions. Show relation to adjacent or critical features of work or products.

E. Related requirements:
1. Ductwork shop drawings

2. Coordination drawing specified in Division 26

F. Submit shop drawings in plan, elevation and sections, showing equipment in mechanical equipment areas.

G. Gas piping sketch indicating proposed location of piping prior to proceeding with the installation.

1.4 PRODUCT DATA AND INSTALLATION INSTRUCTION

A. Submit only pages which are pertinent to the project. All options which are indicated on the product data shall become part of the contract and shall be required whether specified are not.

B. Mark each copy of standard printed data to identify pertinent products, referenced to specification section and article number.

C. Show reference standards, performance characteristics and capacities; wiring and piping diagrams and controls; component parts; finishes; dimensions and required clearances.

D. Modify manufacturer's standard schematic drawings and diagrams to supplement standard information and to provide information specifically applicable to the work. Delete information not applicable.

E. Mark up a copy of the specifications for the product. Indicate in the margin of each paragraph the following: COMPLY, DO NOT COMPLY, or NOT APPLICABLE. Explain all DO NOT COMPLY statements.

F. Provide a separate transmittal for each submittal item. Transmittals shall indicate product by specification section name and number. Separate all submittals into appropriate specification section number. Do not combine specification sections.

1.5 MANUFACTURERS INSTRUCTIONS

A. Submit Manufacturer's instructions for storage, preparation, assembly, installation, start-up, adjusting, calibrating, balancing and finishing.

1.6 CONTRACTOR RESPONSIBILITIES

A. Review submittals prior to transmittal.

B. Determine and verify:
1. Field measurements
2. Field construction criteria
3. Manufacturer's catalog numbers
4. Conformance with requirements of Contract Documents

C. Coordinate submittals with requirements of the work and of the Contract Documents.

D. Notify the Architect/Engineer in writing at time of submission of any deviations in the submittals from requirements of the Contract Documents.

E. Do not fabricate products, or begin work for which submittals are specified, until such submittals have been produced and bear contractor's stamp. Do not fabricate products or begin work scheduled to have submittals reviewed until return of reviewed submittals with Architect / Engineer's acceptance.

F. Contractor's responsibility for errors and omissions in submittals is not relieved whether Architect / Engineer reviews submittals or not.

G. Contractor's responsibility for deviations in submittals from requirements of Contract Documents is not relieved whether Architect/Engineer reviews submittals or not, unless Architect / Engineer gives written acceptance of the specific deviations on reviewed documents.

H. Submittals shall show sufficient data to indicate complete compliance with Contract Documents:
   1. Proper sizes and capacities
   2. That the item will fit in the available space in a manner that will allow proper service
   3. Construction methods, materials and finishes

I. Schedule submissions at least 15 days before date reviewed submittals will be needed.

1.7 SUBMISSION REQUIREMENTS

A. Make submittals promptly in accordance with approved schedule, and in such sequence as to cause no delay in the Project or in the work of any other Contractor.

B. Number of submittals required:
   1. Shop Drawings and Coordination Drawings: Submit one reproducible transparency and three opaque reproductions.
   2. Product Data: Submit the number of copies which the contractor requires, plus those which will be retained by the Architect/Engineer.

C. Accompany submittals with transmittal letter, in duplicate, containing:
   1. Date
   2. Project title and number
   3. Contractor's name, address and contact number.
   4. The number of each Shop Drawing, Project Datum and Sample submitted
   5. Other pertinent data

D. Submittals shall include:
   1. The date of submission
   2. The project title and number
   3. Contract Identification
   4. The names of:
      a. Contractor
      b. Subcontractor
      c. Supplier
      d. Manufacturer
   5. Identification of the product
   6. Field dimensions, clearly identified as such
   7. Relation to adjacent or critical features of the work or materials
   8. Applicable standards, such as ASTM or federal specifications numbers
   9. Identification of deviations from contract documents
   10. Suitable blank space for General Contractor and Architect/Engineer stamps
   11. Contractor's signed and dated Stamp of Approval

E. Coordinate submittals into logical groupings to facilitate interrelation of the several items:
   1. Finishes which involve Architect/Engineer selection of colors, textures or patterns
   2. Associated items which require correlation for efficient function or for installation

1.8 SUBMITTAL SPECIFICATION INFORMATION

A. Every submittal document shall bear the following information as used in the project manual:
   1. The related specification section number
   2. The exact specification section title

B. Submittals delivered to the Architect/Engineer without the specified information will not be processed. The Contractor shall bear the risk of all delays, as if no submittal had been delivered.

1.9 RESUBMISSION REQUIREMENTS

A. Make re-submittals under procedures specified for initial submittals.
   1. Indicate that the document or sample is a re-submittal
   2. Identify changes made since previous submittals

B. Indicate any changes which have been made, other than those requested by the Architect / Engineer.

1.10 CONTRACTOR'S STAMP OF APPROVAL

A. Contractor shall stamp and sign each document certifying to the review of products, field measurements and field construction criteria, and coordination of the information within the submittal with requirements of the work and of Contract Documents.

B. Contractor's stamp of approval on any submittal shall constitute a representation to Owner and Architect/Engineer that Contractor has either determined and verified all quantities, dimensions, field construction criteria, materials, catalog numbers, and similar data or assumes full responsibility for doing so, and that Contractor has reviewed or coordinated each submittal with the requirements of the work and the Contract Documents.

C. Do not deliver any submittals to the Architect/Engineer that do not bear the Contractor's stamp of approval and signature.

D. Submittals delivered to the Architect/Engineer without Contractor's stamp of approval and signature will not be processed. The Contractor shall bear the risk of all delays, as if no submittal had been delivered.

1.11 ARCHITECT / ENGINEER REVIEW OF IDENTIFIED SUBMITTALS

A. The Architect / Engineer will:
   1. Review identified submittals with reasonable promptness and in accordance with schedule
   2. Affix stamp and initials or signature, and indicate requirements for re-submittal or approval of submittal
   3. Return submittals to Contractor for distribution or for resubmission

B. Review and approval of submittals will not extend to design data reflected in submittals which is peculiarly within the special expertise of the Contractor or any party dealing directly with the Contractor.

C. Architect / Engineer's review and approval is only for conformance with the design concept of the project and for compliance with the information given in the contract.
   1. The review shall not extend to means, methods, sequences, techniques or procedures of construction or to safety precautions or programs incident thereto.
   2. The review shall not extend to review of quantities, dimensions, weights or gauges, fabrication processes or coordination with the work of other trades.

D. The review and approval of a separate item as such will not indicate approval of the assembly in which the item functions.

1.12 SUBSTITUTIONS

A. Do not make requests for substitution employing the procedures of this Section.

B. The procedure for making a formal request for substitution is specified in Div. 1.

PART 2 - PRODUCTS - NOT USED

PART 3 - EXECUTION - NOT USED

END OF SECTION

SECTION 23 05 13

ELECTRICAL PROVISIONS OF HVAC WORK

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Electrical provisions to be provided as mechanical work are indicated in other Division 23 sections, on drawings, and as specified.

B. Types of work, normally recognized as electrical but provided as mechanical, specified or partially specified in this Section, include but are not necessarily limited to the following:
1. Motors for mechanical equipment.
2. Starters for motors of mechanical equipment, but only where specifically indicated to be furnished integrally with equipment.
3. Wiring from motors to disconnect switches or junction boxes for motors of mechanical equipment, but only where specifically indicated to be furnished integrally with equipment.
4. Wiring of field-mounted float control switches, flow control switches, and similar mechanical-electrical devices provided for mechanical systems, to equipment control panels.
5. Wiring of smoke detectors for shutdown of air handling equipment when a fire alarm system is not included in the project.
6. Wiring of oil pump, vibration and oil level limit switches for cooling towers.
7. Refrigerant monitor/sensor/alarming and field installed visual/audible display alarms.
8. Pipe heat tracing.
9. Cooling tower vibration switch/interlock/reset.
10. Field interlock wiring from chiller: flow switches, pump aux. Contacts, pump start/stop.
11. Power supply 120 VAC and control signal from chiller control panel to condenser water flow control valve installed in piping leaving chiller.
12. Wiring of all related circulating water system chemical treatment devices.
    a. Low voltage electric contacting water meter
    b. Solenoid valve/blow-down assembly
13. Radiant heater timer switches and/or thermostats
14. Low Voltage thermostat wiring

C. Refer to Division 23 Controls Sections for related control system wiring.

D. Refer to Division 23 sections for specific individual mechanical equipment electrical requirements.

E. Refer to Division 26 sections for motor starters and controls not furnished integrally with mechanical equipment.

F. Refer to Division 26 sections for junction boxes and disconnect switches required for motors and other electrical units of mechanical equipment.

1.2 RELATED WORK

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Specification Sections, apply to work of this Section.

1.3 QUALITY ASSURANCE

A. Wherever possible, match elements of electrical provisions of mechanical work with similar elements of electrical work specified in Division 26 sections for electrical work not otherwise specified.

B. For electrical equipment and products, comply with applicable NEMA standards, and refer to NEMA standards for definitions of terminology. Comply with National Electrical Code (NFPA 70) for workmanship and installation requirements.

1.4 SUBMITTALS

A. Include in listing of motors, voltage, notation of whether motor starter is furnished or installed integrally with motor or equipment containing motors.

PART 2 - PRODUCTS

2.1 MOTORS

A. Provide motors for mechanical equipment manufactured by one of the following:
1. Baldor Electric Company.
2. Century Electric Div., Inc.
3. General Electric Co.
4. Louis Allis Div.; Litton Industrial Products, Inc.
5. Lincoln Electric
6. Marathon Electric Mfg. Corp.
7. Reliance Electric Co.
8. Westinghouse Electric Corp.
9. WEG

B. Motor Characteristics. Except where more stringent requirements are indicated, and except where required items of mechanical equipment cannot be obtained with fully complying motors, comply with the following requirements for motors of mechanical work:

C. Temperature Rating. Rated for 40 Degrees C environment with maximum 50 Degrees C temperature rise for continuous duty at full load (Class A Insulation).

D. Provide each motor capable of making starts as frequently as indicated by automatic control system, and not less than 5 starts per hour for manually controlled motors.

E. Phases and Current Characteristics. Provide squirrel-cage induction polyphase motors for 3/4hp and larger, and provide capacitor-start single-phase motors for 1/2hp and smaller, except 1/6hp and smaller may, at equipment manufacturer's option, be split-phase type. Coordinate current characteristics with power specified in Division 26 sections, and with individual equipment requirements specified in other Division 23 requirements. For 2-speed motors provide 2 separate windings on polyphase motors. Do not purchase motors until power characteristics available at locations of motors have been confirmed, and until rotation directions have been confirmed.

F. Service Factor. 1.15 for polyphase motors and 1.35 for single-phase motors.

G. Motor Construction. Provide general purpose, continuous duty motors, Design "B" except "C" where required for high starting torque.
1. Frames. NEMA #56.
2. Bearings are to be ball or roller bearings with inner and outer shaft seals, regreasable except permanently sealed where motor is inaccessible for regular maintenance. Where belt drives and other drives produce lateral or axial thrust in motor, provide bearings designed to resist thrust loading. Refer to individual section of Division 23 for fractional-hp light-duty motors where sleeve-type bearings are permitted.

3. Except as indicated, provide open drip-proof motors for indoor use where satisfactorily housed or remotely located during operation, and provide guarded drip-proof motors where exposed to contact by employees or building occupants. Provide weather-protected Type I for outdoor use, Type II where not housed. Refer to individual sections of Division 23 for other enclosure requirements.
4. Provide built-in thermal overload protection and, where indicated, provide internal sensing device suitable for signaling and stopping motor at starter.
5. Noise Rating: Provide "Quiet" rating on motors.

H. All motors shall be premium efficiency.

I. Provide an inverter duty motor on all equipment that utilizes a variable frequency drive.

2.2 EQUIPMENT FABRICATION

A. Fabricate mechanical equipment for secure mounting of motors and other electrical items included in work. Provide either permanent alignment of motors with equipment, or adjustable mountings as applicable for belt drives, gear drives, special couplings and similar indirect coupling of equipment. Provide safe, secure, durable, and removable guards for motor drives. Arrange for lubrication and similar running-maintenance without removal of guards.

2.3 GENERAL REQUIREMENTS – SHAFT GROUNDING RINGS

A. All motors operated on variable frequency drives shall be equipped with a maintenance-free, conductive microfiber shaft grounding ring to meet NEMA MG-1, 3.4.4.4.3 requirements, with a minimum of two rows of circumferential microfibers to discharge damaging shaft voltages away from the bearings to ground. SGR’s Service Life: Designed to last for service life of motor. Provide AEGIS SGR Conductive MicroFiber Shaft Grounding Ring, or approved equal.

B. Application Note: Motors up to 100 HP shall be provided with one shaft ground ring installed on either the drive end or non-drive end. Motors over 100 HP shall be provided with an insulated bearing on the non-drive end and a shaft grounding ring on the drive end of the motor with the exception of line contact bearings in the drive end of the machine. In this instance the line contact bearing must be electrically insulated and the AEGIS Bearing Protection Ring installed on the opposite drive end of the motor. Grounding rings shall be provided and installed by the motor manufacturer’s recommendations.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install motors on motor mounting systems in accordance with motor manufacturer’s instructions, anchored to resist torque, drive thrusts, and other external forces inherent in mechanical work. Secure sheaves and other drive units to motor shafts with keys and Allen set screws on flat surface of shaft. Unless otherwise indicated, set motor shafts parallel with machine shafts.

B. Verify voltage with Electrical Plans.

END OF SECTION

SECTION 23 05 14

HVAC CONDENSATE DRAIN PIPING SYSTEM

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Provide and install air conditioning condensate drains.

1.2 RELATED WORK

A. Division 23 - Mechanical
   1. Insulation
   2. Fan/Coil Units
   3. Air Handling Units
   4. Chilled Water Pumps
   5. Air Compressor Storage Tanks
   6. Equipment Drain Pans
   7. Heat Pump Units

PART 2 - PRODUCTS

2.1 PIPE MATERIAL

A. Type “L” copper with drainage pattern fittings.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install the system to facilitate easy removal.
   1. Use threaded plugged tee at each change of direction to permit cleaning.
   2. Install a cleanout every 50 feet of straight run piping
   3. Maintain a positive slope on all piping

B. Install a water seal trap leg based on the fan pressure.
   1. Size the length of the trap leg 1 inch larger than the actual system pressure.

C. Install traps and cleanout as shown in the drawing details.
   1. Confirm requirements with manufacturer's installation instructions

3.2 SIZE PIPE AS SHOWN ON DRAWINGS.

A. Do not install piping sized smaller than the unit drain connection size.

3.3 SECONDARY DRAINS

A. Provide secondary drains where required by code, shown on the drawings, or where equipment has secondary drain connections.

END OF SECTION

SECTION 23 05 18

VARIABLE FREQUENCY INVERTER

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Furnish and install a variable frequency inverter for the following equipment items.
   1. Variable Volume Air Handling Units.
   2. Pumps.

1.2 RELATED WORK

A. Division 23 Mechanical
   1. Electrical Provisions of Mechanical Work.
   2. Air Handling Units
   3. Pumps
   4. Building Management Control System Sequences

1.3 COOPERATION WITH OTHER TRADES

A. Coordinate this work with work under Division 26 Electrical to ensure that intended functions are achieved.

B. Coordinate the size of the variable frequency inverter with the equipment being served by the inverter. The rated current output amps are to be equal to or greater than motor rated full load amps.

1.4 SUBMITTALS

A. Submit manufacturer's information and shop drawings as specified.
   1. Complete technical details.
   2. Dimensions and manufacturer's installation manual.
   3. Schematic diagrams of the circuitry and field connections.
   4. Manufacturer's start-up manual.

1.5 STANDARDS

A. UL.

B. CSA.

C. ISO 9001

D. NEC.

E. FCC.

1.6 WARRANTY

A. The manufacturer shall provide a full parts and labor warranty for a period of five (5) years from substantial completion.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. ABB

B. Danfoss Graham

2.2 CABINET

A. The inverter and all accessories shall be provided within a wall mounted UL Listed NEMA 12 enclosure with deadsides and removable hinged, gasketed doors with provisions for locking. Cabinet shall be constructed of metal for reduction of radio frequency interference (RFI) and electromagnetic frequency interference.

2.3 INTERFERENCE WITH OTHER SYSTEMS

A. The inverter shall be designed and constructed to comply with IEEE Standard 519-1993 with respect to line noise and RFI generation. All units shall generate less than 3% total harmonic distortion back to the incoming power line at the point of common connection with sensitive equipment. A harmonic analysis shall be submitted with the approval drawings to verify compliance with the latest version of IEEE-519 voltage and current distortion limits as shown in Table 1.2 and 10.3 at the point of common coupling (PCC). The PCC shall be defined as the consumer-utility interface or primary side of the main distribution transformer.

B. Dual DC Bus filtered chokes (factory installed and wired in the drive enclosure) equivalent to 5% input line reactors shall be provided to minimize harmonics reflected onto the input line.
   1. Shall not interfere with computer and other electronic systems in the building.
   2. If not inherently protected, provide a suitable isolation transformer.
   3. The system shall not produce spikes on the incoming line.

C. Any inverter that generates sufficient electrical line noise to interfere with the operation of sensitive building equipment shall be field modified or replaced by the inverter supplier at no additional cost to the Owner.

2.4 PROTECTIVE CIRCUITS

A. Provide the following protection:
   1. Input line fuses or molded case circuit breaker rated at 100 AIC.
   2. Input line noise suppression with MOV's (metal oxide varistors) and snubber circuits. MOV's shall be provided across incoming line terminals, AC input reactors, DC choke filters, and transistors to protect inverter from voltage surges and spikes.
   3. Protection of solid state inverter devices by limiting output current to 110% of inverter rating, automatically prevent overcurrent trip due to momentary overload conditions.
   4. Current limiting DC buss fuse between input and output sections of inventor.
   5. Input overvoltage trip at 480 vac + 10% trip.
   6. Input undervoltage at 480 vac – 10% trip
   7. Instantaneous overcurrent protection of solid state inverter devices.
   8. Individual overcurrent protection of solid state inverter devices.
   9. Output overvoltage trip.
   10. Loss of input phase, phase reversals, or blown fuse.
   11. Thermal overload trip for overload protection of solid state devices.
   12. Ground fault protection on start-up.
   13. Output line to line short circuit protection.
   14. Phase to phase short circuit or severe overload conditions of output.
   15. Overload of motor.
   16. Frequency stall.
   17. DC buss high voltage.

18. Control function error.
19. Heatsink over temperature (Max. operating ambient: 122 degrees F)
20. Controller able to operate without a motor or any other equipment connected to the output (To facilitate startup and troubleshooting).
21. Capable of restarting into a rotating motor without component damage.
22. Shut down safely without component failure in the event of a sustained power loss, and will automatically return to normal operation, if start is "on" and power is restored.
23. Shut down safely without component failure in the event of a momentary power loss. Automatically return to normal operation if the start is "on", and normal power is restored. Capable of establishing speed control without shutdown or component failure.
24. Designed for input power contactor opening or closing while control is activated, without damage to the controller.
25. Automatically reset trip resulting from overcurrent, undervoltage, overvoltage, or over temperature, and automatically restart after removal, or correction of the faulty condition.
26. Provide status lights or digital display for indication of failure conditions, and form C relay provided for remote indication. Digital display or status lights to indicate power on, at speed, and drive enabled.
27. Operation and fault diagnostic function circuits shall be built into each inverter that provides information in determining the cause and source of a fault. Diagnostics to provide the following information:
    a. Operating mode at trip (Accel, Decel, Constant speed).
    b. Output current at trip.
    c. Output voltage at trip.
    d. Additional faults that occurred simultaneously of immediately before displayed tripped.

    Any drive requiring separate card to provide this information shall provide a diagnostic card for each drive.
28. DC link reactor.
29. Input power disconnect, lockable type.
30. Input power disconnect switch / circuit breaker, with lockable type handle.

2.5 OPERATOR DEVICES

A. The following operator devices shall be door or remote mounted:
1. Digital keypad and LCD provided to perform all parameter adjustments, operation monitoring, and operation programming.
2. Power on indication light.
3. Flush mounted meters or digital display to indicate output voltage, output frequency, and output current, in percent of maximum 0 to 100%.
4. Manual/Off/Auto 3 position selector switch (hand-off-auto) and manual speed setting control to provide the following control sequences:
    a. In automatic mode, controller shall follow an external control signal and respond to remote start-stop contact.
    b. In manual (hand) mode, controller shall follow speed signal set via door mounted keypad and start/stop switch. Switching from “hand” to “auto” and vice versa shall require a single keystroke to a dedicated changeover key. Inverters requiring multiple keystrokes and/or reprogramming of internal parameters to accomplish changeovers are not acceptable.
    c. An integral "safety interlock" protection shutdown circuit shall be provided for interface with firestats, smoke detectors, high static pressure limit switches, vibration switches, etc.
5. Programmable lockout code to prevent unauthorized programming.
6. Critical frequency avoidance capability (up to 3 resonant points).

2.6 FIELD ADJUSTMENTS

A. The following shall be adjustable in the field:
   1. Maximum Speed: 0 to 125% adjustable.
   2. Minimum Speed: 0 to 100% adjustable.
   3. Acceleration/deceleration rates: 0 to 3600 sec.
   4. Instantaneous overcurrent trip: 50% to 2000%.
   5. Volts/hertz ratio: Field adjustable to 16 patterns or set for automatic selection of proper V/F load profile to operate motor without overdriving or overloading.
   6. Current limit circuit: 60 to 100%.
   7. Carrier frequency: 6 to 16 KHZ.
   8. Control interface: selectable to follow a 0-5 VDC, 0-10 VDC, 4-20 MA, either direct or indirect acting.
   9. Control signal Bias: 0 to 80 HZ.
   10. Control signal gain: 0 to 80 HZ.
   11. Calibration of remote speed signal: 0 to 80 HZ.

2.7 ELECTRICAL CONSTANT SPEED BYPASS

A. Provide all components and circuitry necessary to provide manual bypass of the inverter. The bypass package shall be mounted in a cabinet common with the inverter and shall be constructed in such a manner that the inverter can be removed for repair while still operating the motor in the "bypass" mode. Manual bypass shall contain the following:
   1. Two contactors mechanically interlocked via a three position through the door selector switch to provide the following control:
      a. "Inverter" Mode connects the motor to the output of the inverter.
      b. "Bypass" Mode connects the motor to the input sine wave power. Transfer must occur with input disconnect open. Motor is protected via thermal overload.
      c. "Off" Mode disconnects motor from all input power.
   2. A molded case circuit breaker or fused disconnect switch with door interlocked handle (lock out type) that interrupts input power to both the bypass circuitry and the drive.
   3. An input contactor, interlocked with both the thermal motor overload and external safeties which disconnects power to the motor regardless of the mode of operation (either "inverter" or "bypass" mode).
   4. A thermal overload to provide protection of motor in the bypass mode.
   5. A safety interlock circuit that disconnects power to the motor (regardless of the mode of operation – “inverter” or “bypass”) in response to a signal from the thermal overload and/or external safety circuits.
   6. Line voltage to 24 volt DC power source, fused per NEC, shall provide power to all bypass control circuits.

2.8 SERIAL COMMUNICATIONS

A. The VFD shall have the capability of communicating with the EMS control system via an RS-485 serial port.

B. VFD shall be provided with protocol information specific to the selected EMS control manufacturer and shall be pre-configured at the factory to automatic communications, without the need for field programming.

C. Serial communications capabilities shall be included, but not limited to: run/stop control, speed set adjustment, proportional/integral or PID control adjustments, current limit and accel/decel time adjustments. The drive shall also have the capability of allowing the DDC system to monitor the following feedback signals: process variable, output speed/frequency, current, torque, power (KW), operating hours, kilowatt hours; relay outputs, and diagnostic warning and fault information.

D. The VFD shall allow the DDC system to control the drive’s digital and analog outputs and

monitor all drive digital and analog inputs via the serial interface.

E. Provide BACnet interface card.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation as per manufacturer's recommendations and requirements.
1. Inverter chassis is properly grounded.
2. Line, Load, Control, and Fire/Safety wiring are installed in separate conduits.
3. Both ends of conduit entering and leaving VFD into AHU cabinets and motors must be sealed air tight.

3.2 MANUFACTURER START-UP SERVICE

A. Factory trained personnel shall be provided for start-up assistance, minimum (1) day per unit.
1. The manufacturer shall provide start-up commissioning of the VFD and its optional circuits by a factory certified service technician who is experienced in start-up and repair services. Sales personnel and other agents who are not factory certified shall not be acceptable as commissioning agents.
2. Start-up services shall include checking for verification of proper operation and installation for the VFD, its options and its interface wiring to the building automation system.
3. Adjustable devices, components, and assemblies to assure optimum performance.
4. Make final adjustments to the installed drive to assure proper operation of the fan system. Obtain performance requirements from installer of driven loads.
5. Assistance will be provided to the Owner (upon request) to determine the optimum capacitance for per factory correction and avoidance of potential resonance problems and will determine optimum line filter required.
6. A written report, duly signed by the technician detailing set points of adjustable devices, amperages recorded, and any other pertinent data. This information is to be included in the operation and maintenance manual.

B. Input DC voltage to dry motor windings when fan is not in operation at the following locations:
1. Cooling tower fan motor
2. Motors downstream of coils
3. Rooftop unit motors

3.3 DEMONSTRATION AND TRAINING

A. Provide system demonstration to personnel, Owner, and/or Owner's selected representatives.

B. Demonstrate operation of controllers in the automatic and manual modes.

C. Provide a minimum of two days of technical training for the owner's operating and technical staff. Schedule training with owner's authorized representatives, during normal business hours and not less than 30 days prior to planned session.

D. Training may be consecutive or random, at Owner's option.

END OF SECTION

SECTION 23 05 19

HVAC PRESSURE AND TEMPERATURE INSTRUMENTS

PART 1 - GENERAL

1.1 WORK INCLUDED

A. This section specifies gauges, thermometers, wells and/or pressure and temperature test stations to be installed as specified.

1.2 RELATED WORK

A. Division 23, Mechanical
   1. 23 05 00 - Mechanical General Provisions
   2. 23 20 00 - Pipe and Pipe Fittings, General
   3. 23 05 23 - Valves, Strainers and Vents
   4. 23 21 13 - Hot Water and Chilled Water Piping, Valves and Appurtenances

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS - GAUGES AND THERMOMETERS

A. Trerice

B. Taylor

C. Marsh

D. Weksler

E. Marshalltown

F. Weiss

G. Miljoco

2.2 PRESSURE GAUGES

A. Case and Ring: 4" type 304 stainless steel; liquid filled case with stainless steel bayonet ring.

B. Dial: White aluminum with black markings

C. Window: Clear acrylic

D. Tube: Phosphor bronze and forged brass socket.

E. Gauge accuracy: +/- 1% over operating range.

F. For pulsating service, provide impulse dampers.

G. Without flange for pipe mounting.

H. With flange for wall mounting.

I. Weiss Model: LF44S-1B or equal.

2.3 THERMOMETER WELLS

A. Brass or type 300 stainless steel. Machined bar stock, 1-piece construction.

B. Where installed in insulated piping or vessels, provide with extension neck to match insulation thickness.

C. Provide metal-to-metal contact with bulb chamber for maximum sensitivity.

D. Wells shall be sized to extend a minimum of 50% into pipe.

2.4 THERMOMETERS IN PIPING SYSTEMS OR VESSELS

A. Die cast aluminum case with baked epoxy finish.

B. Adjustable angle 9" scale length.

C. Clear acrylic window.

D. Brass stem, length to match well.

E. Red reading organic spirit filled-in magnifying glass column.

F. White background with black figures and markings.

G. Brass stems and union connections.

H Accuracy: +/- 1% of scale range.

I. Range:
1. Hot water lines: 30°F to 240°F.
2. Chilled water lines: 0°F to 100°F or 120°F
3. Condenser water: 0°F to 100°F.

2.5 PRESSURE AND TEMPERATURE TEST STATIONS

A. "Test Station" fitting to receive either a temperature or pressure probe. Fitting shall be solid brass with two valve cores of Nordel.
1. Fitted with a color coded cap strap with gasket.
2. Acceptable Manufacturer: Peterson Equipment Company.
3. Provide with extension neck to match insulation thickness.

B. Provide to the Owner a fitted case with:
1. Two 0-100 psi pressure gauges as specified and adapters with 1/8" OD probe.
2. Four 5" stem pocket testing thermometers.
   a. Two with range 25°F to 125°F for chilled water and condenser water.
   b. Two with range 0°F to 220°F for hot water.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install in accordance with drawing details and manufacturer's recommendations.

B. Provide a ball valve at each gauge.

C. Locate gauges and thermometers to be easily readable from the floor at a 5'-6" eye level. Use adjustable angle or rigid stem as required. Install gauges in upright position.

D. Install gauges in the following locations: across pumps, chiller cooler and condenser, storage tanks, heat exchangers.

E. Test wells for automatic temperature controls shall be furnished by Building Management Control Section and installed by Mechanical Contractor.

F. Install thermometer in the following locations: Across chiller cooler and condenser, storage tanks, across heat exchangers, across boiler, leaving side of water heater, leaving water side of tempered water valves, common chilled and hot water lines.
   1. Hot water lines: 30°F to 240°F.
   2. Chilled water lines: 0°F to 100°F or 120°F
   3. Condenser water 0°F to 100°F.

END OF SECTION

SECTION 23 05 23

HVAC VALVES, STRAINERS AND VENTS

PART 1 - GENERAL

1.1 SECTION INCLUDES

A. HVAC Valves

B. Pipe strainer and suction diffusers.

PART 2 - PRODUCTS

2.1 VALVES

A. Pressure Ratings:
1. Unless otherwise indicated, use valves suitable for 125 minimum psig working steam pressure (WSP) and 450°F.
2. The pressure temperature rating of valves shall be not less than the design criteria applicable to components of the system.

B. Butterfly Valves
1. Butterfly valves shall conform to MSS-SP67.
2. Liners, inserts and discs shall be suitable for the intended service.
3. Valves shall have a full lug type body designed for installation between ANSI standard flanges, and shall be rated at full working pressure with downstream flange removed.

C. Balancing Valves
1. Provide balancing valves with:
   a. Corrosion resistant plug with resilient seal when required.
   b. O-ring stem seal.
   c. Permanently lubricated, corrosion resistant bearings.
2. Connections
   a. Through 2" pipe size use threaded connections.
   b. For valves 2-1/2" pipe size and larger shall be provided with 150 psig flange connections.
3. Provide each valve with:
   a. Memory stop.
   b. Plastic drip cap.
   c. 1/8" gauge tap.

D. Ball Valves
1. Provide ball valves with:
   a. Blowout proof stem.
   b. Full size port, 316 stainless steel ball and stem.
   c. Cast bronze body.
   d. Threaded ends.
2. Seat, seals, thrust washers and packing shall be suitable for the intended service.
3. Service rating:
   a. 150 psi saturated steam.
   b. 600 psi WOG.
4. Where piping is insulated, ball valves shall be equipped with 2” extended handles of non-thermal conductive material. Provide a protective sleeve that allows operation of the valve without breaking the vapor seal or disturbing the insulation.

5. Provide with memory stop for balancing valves.

E. Valve Connections
1. Provide valves suitable to connect to adjoining piping as specified for pipe joints. Use pipe size valves. Sweated joints are not allowed.
2. Thread pipe sizes 2" and smaller.
3. Flange pipe sizes 2-1/2" and larger.
4. Use screw to solder adapters for copper tubing.
5. Use grooved body valves with mechanical grooved jointed piping.

F. Valve Operators
1. Where butterfly valves are provided:
   a. Provide gear operators on valves 6" and larger.
   b. Where valves are located 7' or more above the finished floor in equipment room areas provide chain-operated sheaves. Extend chains to about 5' above floor and hook to clips, arrange to clear walking space.
   c. Lever lock handle with toothed plate for shut-off service and infinitely adjustable handle with lock and nut and memory stop for throttling service on valves 4" and smaller.
   d. Provide worm gear operators on discharge side of pumps for balancing, for all sizes of valves.
   e. All valves 2-1/2” and larger provided by Milwaukee Valve shall be provided with gear operators.

G. Acceptable Manufacturers
1. Dezurik
2. Crane
3. Nibco
4. Keystone
5. Milwaukee Valve

H. Check Valves
1. Bronze body, 2" and smaller, bronze disc (Teflon disc for steam service), regrinding swing check, screw-in cap, threaded connection.
2. Iron body, 2-1/2" and larger, bronze trim, non-slam: stainless steel pins and springs, and bronze plate or bronze mounted, regrind-renew check, bronze seat ring and disc. Provide either wafer or threaded lug.
3. Acceptable Manufacturers
   a. Mission Duochek
   b. Nibco
   c. Keystone
   d. Milwaukee Valve

I. Provide valves of same manufacturer throughout where possible.

J. Provide valves with manufacturer's name and manufacturing location, duty and pressure rating clearly marked on outside of body.

K. Where valves are installed in insulated piping, provide with extended neck so valve operator and stop plate clears the full thickness insulation.

L. Provide valve, seat and trim materials suitable for the intended service.

M. Provide memory stops for all valves used for throttling service. Valves for throttling service shall be butterfly, plug, caged or ball type.

N. Condenser Water Basin Float Valve:
1. Ductile Iron valve, body and cover
2. Stainless steel trim
3. Fully adjustable high and low level settings
4. Stainless steel float, float linkage and float rod
5. Flow clean strainer
6. CV Flow Control for opening and closing
7. ASTM A 536, B16.42, 150# Class
8. Stilling well
9. Acceptable Manufacturer: CLA-VAL

2.2 PIPE SYSTEMS STRAINERS

A. Body:
1. "Y" pattern or basket as shown on the drawings.
2. Line size.
3. Threaded strainer blow down port.
4. ASTM A #126 Class B Cast Iron Body.

B. Construction:
1. 2" size and smaller with screw connections rated 400 psi WOG.
2. Over 2" size with flanged connections, rated 125 psi WOG.

C. Fabricate screens of Monel or type 304 stainless steel:
1. With 20 mesh woven wire in piping systems through 2".
2. With 0.45 perforations in piping systems 2-1/2" and 3".
3. With 0.125 perforations in piping systems 4" and larger.

D. Start-up:
1. Provide an additional fine mesh disposable screen for use during start-up operations.
2. Remove after 30 days.
3. Attach to piping for owners review.

E. Acceptable Manufacturers
1. Crane
2. Keckley
3. Zurn
4. Mueller
5. McAlear
6. Muesco

2.3 SUCTION DIFFUSER

A. For each pump as shown on the drawing, provide an angle type suction diffuser. Body is to fit both the pump inlet and suction pipe size.

B. Components:
1. Inlet straightening vanes.
2. Removable end cap.
3. Gauge ports.
4. Threaded strainer blow down port.
5. Adjustable support foot.
6. Removable magnetic insert.

C. The screen shall be as specified for pipe system strainers.

D. Provide an additional fine mesh disposable strainer for use during start up operations.
1. Remove after 30 days operation and all flushing is complete.
2. Attach to piping for owners review.

E. Construction:
1. 2" size and smaller with screw connections rated 400 psi WOG.
2. Over 2" size with flanged connections, rated 125 psi WOG.

F. Fabricate screens of Monel or type 304 stainless steel:
1. With 20 mesh woven wire in piping systems through 2".
2. With 0.045 perforations in piping systems 2-1/2" and 3".
3. With 0.125 perforations in piping systems 4" and larger.

2.4 VALVE SCHEDULE

A. Hydronic Service
1. Chilled Water Service
a. Ball Valves up to 2": Nibco T-585-70-66 w/Nib-Seal insulated Handle
b. Butterfly Valve 2-1/2" and larger: Nibco LD - 2000
Keystone Figure 222
2. Heating & Condenser Water Service
a. Ball Valves up to 2": Nibco T-585-70-66
b. Butterfly Valve 2-1/2" and larger: Nibco LD - 2000
Keystone Figure 222
3. Check Valve:
a. Nibco Check Valve: T - 413 - B
b. Nibco Check Valve 2-1/2" and larger: F - 918 - B
c. Nibco Check Valve 2-1/2" and larger: W - 920 -W (Wafer)
d. Keystone Check 2-1/2" and larger: FIQ 810

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install valves with stems upright or horizontal, not inverted.

B. Install valves for shut-off and isolating service at each piece of equipment, at vertical risers, and where shown on the drawings.

C. Use butterfly valves and ball valves in circulating water systems, for balancing duty. Provide infinite position gear operator with memory stop.

D. Provide drain valves at main shut-off valves and low points of piping and apparatus so the systems can be entirely drained.
1. 1" valve for pipes 6" and larger.
2. 3/4" valve for pipes smaller than 6".
3. Terminate with pipe plug.
4. Drain valves shall be ball valves.

E. Where valves are installed in insulated pipe, valve operator shall have an insert so the lever or handle will not damage the insulation. Install handles so the lever or handles will not damage the insulation.

F. Provide clearance for installation of insulation and access to valves.

G. Provide access where valves are not exposed.

H. Provide float valves / stilling wells in cooling tower or condenser water basins for water level control. Provide stilling wells around float valve to prevent turbulence ripples or wind interference.

I. Butterfly valves shall be installed per ASME B31.3 Process Piping, and ASME B16.5 Pipe Flanges and Flanged.

3.3 PIPE SYSTEMS STRAINERS

A. Provide an additional fine mesh disposable strainer for use during start up operations.
   1. Remove after 30 days operation and all flushing is complete.
   2. Attach to piping for owners review.

B. Provide strainer in supply piping for all coil connections.

C. Provide strainer in condenser water piping entering chiller.

3.4 WATER SYSTEM AIR VENTS

A. Provide manual air vents at high points and at any other air pockets of closed circulating pipe systems. Extend 3/8" hard drawn copper tubing discharge drains to nearest floor or hub drain. Provide 1/4" Ball Valve as specified.

B. Where high point vents are not readily accessible provide additional valves at vent termination.

END OF SECTION

SECTION 23 05 33

HVAC PIPE HEAT TRACING

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Furnish and install a complete industrial, constant wattage, UL listed system of electric pipe heat tracing and controls on all make-up water piping outdoors above grade to prevent freezing. The heat tracing system shall conform to ANSI/IEEE Standard 515-1989.

B. Protect the pipe, valves, fittings, meters and appurtenances. Apply sufficient cable and overheat thermostat to protect the entire system.

1.2 SUBMITTALS

A. Submit shop drawings and product data as specified in Section 23 05 12

B. Submit detailed calculations for length of heat tracing cable per foot of pipe, based on actual length of piping installed.

C. Submit manufacturer's certified capacity charts with selections plotted thereon.

D. Submit manufacturer's installation instructions.

E. Submit full load ampere requirement and voltage for branch circuit.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Raychem Corporation

B. Thermon Manufacturing Company

2.2 COMPONENTS

A. Self-regulating heater.
1. The self-regulating heater shall consist of two 16 AWG tinned-copper bus wires embedded in parallel in a self-regulating polymer core that varies its power output to respond to temperature all along its length, allowing the heater to be crossed itself without overheating and to be cut in the field. The heater shall be covered by a radiation cross-linked modified polyolefin dielectric jacket.
2. In order to provide energy conservation, and to prevent overheating, the heater shall have a self-regulating factor of at least 90%.
3. The heater shall operate on a line voltage of 120 VAC without the use of transformers.
4. The heater shall be sized according to the following. The required heater output rating is in watts per foot at 50°F (heater selection based on 1-1/2 inch fiberglass insulation on metal piping).
5. The heater shall be XL-Trace as manufactured by Raychem Corporation or XL-Econotrace as manufactured by Thermon Manufacturing Company.
6. Power connection, end seal, splice and tee kits components shall be applied in the field.
7. The system shall be controlled by an ambient sensing thermostat set at 40°F either directly or through an appropriate contactor.

8. Provide an end-of-circuit voltage indicating light

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install and start up the pipe heat tracing system in accordance with the manufacturer's Installation, Start-up and Service Instructions.

B. Install the pipe heat tracing cable under the pipe insulation.

C. Apply “Electrically Traced” signs to the outside of the thermal insulation.

D. Ground fault protection of the equipment shall be provided per the 1996 National Electrical Code, Article 427-22.

E. Provide a cast aluminum weatherproof NEMA-4 rated junction box for installation of the cable, with pilot light to indicate operation of the cable.

F. Use only electrical components as recommended by the manufacturer.

3.2 ELECTRICAL WORK

A. Furnish and install the wire, conduit and raceway systems required for the automatic operation of the pipe heat tracing system. Conform to the National Electrical Code.

B. The specified wiring work includes:
1. Wiring of control instruments between thermostat and junction boxes
2. Installation of thermostat and junction boxes
3. Wiring from the heat tracing cable to the junction boxes

C. Related branch circuit power wiring from the junction box to ground fault type circuit is specified to be provided in Division 26.

D. Provide devices and appurtenances as specified in Division 26.

E. Identify each circuit at each terminal with a separate tag.

F. Color code wires in accordance with IPCEA Standards.

G. Make all joints and connections with approved mechanical connectors.

3.3 TESTING OF THE PIPE HEAT TRACING SYSTEM

A. Test the pipe heat tracing system:
1. Simulate freezing outside air conditions
2. Measure the amperage draw of the heat tracing system
3. Compare to the manufacturer's capacity rating of the actual system
4. After installation and before and after installing the thermal insulation, subject heat to testing using a 1000 VDC megger. Minimum insulation resistance should be between 20 to 1000 megohms regardless of the length.

B. Submit records of test for approval prior to substantial completion; insert in the Owner's Manual.

END SECTION

SECTION 23 05 48

VIBRATION ISOLATION

PART 1 - GENERAL

1.1 SCOPE

A. Furnish, install, and adjust vibration isolation.

1.2 RELATED WORK

A. Division 23 Mechanical.
   1. Refer to the Section on Ductwork for flexible connections between fans and ducts.
   2. Refer to the Section on Equipment Supports for equipment foundation pads.

1.3 SUBMITTALS

A. Submit product data showing type, size, load, deflection and other information required. Include clearly outlined procedures for installing and adjusting isolators.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Amber Booth
B. Kinetics
C. Mason
D. Korfund
E. VSI.
F. Vibration Eliminator Co., Inc.
G. Metraflex

2.2 ISOLATOR TYPES

A. Neoprene mountings shall have a minimum static deflection of 0.35 inches (9mm). All metal surfaces shall be neoprene covered and have friction pads both top and bottom. Bolt holes shall be provided on the bottom and a tapped hole and cap screw on top. Steel rails shall be used above the mountings under equipment such as small vent sets to compensate for the overhang.

B. Spring isolators shall be free standing and laterally stable without any housing and complete with a molded neoprene cup or ¼ inch (6mm) neoprene acoustical friction pad between the base plate and the support. All mountings shall have leveling bolts that must be rigidly bolted to the equipment. Installed and operating heights shall be equal. The ratio of the spring diameter divided by the compressed spring height shall be no less than 0.8. Springs shall have a minimum additional travel to solid equal to 50% of the rated deflection. Submittals shall include spring diameters, deflection, compressed spring height and solid spring height.

C. Hangers shall consist of rigid steel frames containing minimum 1-1/4 inch (32mm) thick neoprene elements at the top and a steel spring with general characteristics as in specification B seated in a steel washer reinforced neoprene cup on the bottom. The neoprene element and the cup shall have neoprene bushings projecting through the steel box. In order to maintain stability the boxes shall not be articulated as clevis hangers nor the neoprene element stacked on top of the spring. Spring diameters and hanger box lower hole sizes shall be large enough to permit the hanger rod to swing through a 30-degree arc from side to side before contacting the cup bushing and short circuiting

the spring. Submittals shall include a hanger drawing showing the 30-degree capability.

D. Flexible spherical expansion joints shall employ Peroxide cured EPDM in the covers, tubes and frictioning of the reinforcement. Reinforcement must be DuPont Kevlar. Solid steel rings shall be used within the raised face rubber ends to prevent pullout. No substitutions for the DuPont Kevlar or the solid steel embedded flange rings are acceptable. Sizes 2 inch (50mm) and larger shall have two spheres reinforced with a metal ring between spheres to maintain shape and complete with split ductile iron or steel flanges with hooked or similar interlocks. Sizes 16 inch (400m) to 24 inch (600mm) may be single sphere. Sizes 3/4 inch (20mm) to 1-1/2 inch (40mm) may have threaded bolted flange assemblies, one sphere and cable retention. 14 inch (300mm) and smaller connectors shall be rated at 250 psi (17 BAR) up to 190°F (88°C) with a uniform drop in allowable pressure to 190 psi (13 BAR) at 250°F (121°C). 16 inch (400mm) and larger connectors are rated 180 psi (12 BAR) at 190°F (88°C) and 135 psi (9 BAR) at 250°F (121°C). Safety factors to burst and flange pullout shall be a minimum of 3/1. All joints must have permanent markings verifying a 5 minute factory test at twice the rated pressure. Concentric reducers to the above specifications may be substituted for equal ended expansion joints.

High pressure joints shall be substituted for the above where operating pressures are higher than standard. Expansion joints shall be installed in piping gaps equal to the length of the expansion joints under pressure. Control rods need only be used in unanchored piping locations where the manufacturer determines the installation exceeds the pressure requirement without control rods. Control rods are not desirable in seismic work. If control rods are used, they must have ½- inch (12mm) thick Neoprene washer bushings large enough in area to take the thrust at 1000 psi (6.9 N/mm5) maximum on the washer area. Standard diameter bolt washers are not acceptable.

Submittals shall include two test reports by independent consultants showing minimum reductions of 20 DB in vibration accelerations and 10 DB in sound pressure levels at typical blade passage frequencies on this or a similar product by the same manufacturer. All expansion joints shall be installed on the equipment side of the shut off valves.

2.3 ISOLATOR APPLICATION

EQUIPMENT	ISOLATOR TYPE	MINIMUM DEFLECTION
Pump (Above Grade)	B	1.5”
Suspended Fan Coil Units	C	0.5”
Floor Mounted Fan Coil Units	A	0.35”
Condensing Units	A	0.35”
In-Line Fans	C	0.5”

2.4 PIPING ISOLATOR APPLICATIONS

EQUIPMENT	ISOLATOR TYPE
Floor Mounted Pumps	D
Suspended Pumps	D
Chiller Pipe Connections	D

2.5 FLEXIBLE CONNECTIONS IN PIPING AT PUMPS

A. Provide flexible connections at suction and discharge of chilled water, and hot water pumps, piping connections on chillers and where indicated on drawings. Refer to schedule above.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Stock Requirements. The isolation manufacturer's representative shall maintain an adequate stock of springs and isolators of type used so that changes required during construction and installation can be made.

B. Factory Representation. After installation, furnish factory-trained representative of the isolation manufacturer to check various isolators and report measured versus anticipated deflection on all isolators. Have the representative certify that isolators have been installed in accordance with manufacturer's recommendations and approved submittals. Provide written report to Engineer indicating compliance prior to final acceptance.

END OF SECTION

SECTION 23 05 93

TESTING, BALANCING AND ADJUSTING (TAB) OF ENVIRONMENTAL SYSTEMS

PART 1 - GENERAL

1.1 SECTION INCLUDES

A. Balance, adjust and test the air distribution system including the exhaust system.

B. Balance, adjust and test the hydronic system.

C. Verify and record the duct test results performed by the mechanical contractor.

1.2 RELATED SECTIONS

A. COORDINATION OF TESTING AND BALANCING

1.3 PAYMENT PROCEDURES

A. The work of this Section of the Specifications shall bid the project directly to the General Contractor.

1.4 SUBMITTALS

A. History of the TAB organization.

B. Agency certification.

C. Personnel qualifications.

D. TAB data forms.

E. Instrumentation list.

F. Name of the project supervising engineer.

G. Name and address and contact person of five successfully completed projects of similar size and scope.

H. To perform required professional services, the balancing agency shall have a minimum of one test and balance engineer certified by the Associated Air Balance Council.

1.5 TAB FIRM QUALIFICATIONS

A. The organization performing the work shall be a Certified member in good standing of the (AABC) Associated Air Balance Council.

B. Able to furnish evidence of having contracted for and completed not less than five systems of comparable size and type that have served their Owners satisfactorily for not less than five years.

C. A specialist in this field and have the personnel, experience, training, skill, and the organization to perform the work.

D. The balancing agency shall furnish all necessary calibrated instrumentation to adequately perform the specified services. An inventory of all instruments and devices in possession of the balancing agency may be required by the engineer to determine the balancing agency's performance

capability.

E. The balancing agency shall have operated for a minimum of five years under its current name.

F. Personnel:
1. The project supervisor shall be a Professional Engineer registered in Texas.
   a. Extensive knowledge of the work involved.
   b. At least five years experience conducting tests of the type specified.
   c. This test and balance engineer shall be responsible for the supervision and certification of the total work herein specified.
2. All work shall be conducted under the direct supervision of the supervising engineer.
3. Technicians shall be trained and experienced in the work they conduct.

1.6 WARRANTY

A. Provide (AABC) guarantee in writing.

B. Extended warranty.
1. Include an extended warranty of 2 years after completion of test and balance work, during which time the Architect/Engineer may request a retest or resetting of any outlet or other items as listed in the test report.
2. Provide technicians and instruments to assist the Architect/Engineer in making any tests he may require during this period.
3. The balancing agency shall perform an inspection of the HVAC system during the opposite season from that which the initial adjustments were made. The balancing agency shall make any necessary modifications to the initial adjustments to produce optimum system operation.

PART 2 - PRODUCTS

2.1 PREFFERED PROVIDER

A. Costal Air Balance

B. Engineered Air Balance

C. Tab Technologies

PART 3 - EXECUTION

3.1 TAB TOLERANCES

A. The water, outside air, supply air, return air, and exhaust air for each system shall be adjusted to within +/- 5% of the value scheduled on the drawings.

3.2 SITE VISITS

A. During construction, the balancing agency shall inspect the installation of the piping systems, sheetmetal work, temperature controls, energy management system, and other component parts of the heating, ventilating, and air conditioning systems. One inspection shall take place when 60% of the ductwork is installed and another inspection shall take place when 90% of the equipment is installed. The balancing agency shall submit a brief written report of each inspection to the architect and engineer.

B. Upon completion of the installation and start-up of the mechanical equipment by the mechanical contractor, the balancing agency shall test and balance the system components to obtain optimum conditions in each conditioned space of the building. If construction deficiencies are encountered

that preclude obtaining optimum conditions, and the deficiencies cannot be corrected by the mechanical contractor within a reasonable period of time, the balancing agency shall cease testing and balancing services and advise the architect, engineer, general contractor and owner, in writing, of the deficiencies.

C. Note proper piping installation, location of valves, and flow measuring instruments.

D. Make one series of visits, phased as required by construction progress, prior to installation of the ceiling. Note proper installation of balancing dampers.

E. Continue the site visits up to completion of project. In each succeeding report, list corrections made from previous reports.

3.3 TESTING INSTRUMENTS

A. Submit a list of all instruments to be used for the test and balance procedures.
   1. Catalog sheets
   2. Certificate of last calibration
   3. Calibration within a period of six months prior to balancing

B. Testing equipment shall be in good working order and tested for accuracy prior to start of work.

3.4 COORDINATION WITH OTHER SPECIFICATION SECTIONS

A. Review the related ductwork shop drawings and piping shop drawings. Make recommendations concerning suitability with respect to the testing, balancing and adjusting work.

B. Make tests to verify proper placement of the static pressure sensors for the variable air volume fan system control.

C. In cooperation with the work specified in Building Management and Control System section, a systematic listing of the testing and verification shall be included in the final TAB report. The TAB firm shall provide a laptop computer to operate with the Building Management and Control System. Building Management and Control System shall provide all necessary software and special interface cables, as required, to communicate with the DDC system:
   1. Work with the temperature control contractor to ensure the most effective total system operation within the design limitations, and to obtain mutual understanding of the intended control performance.
   2. Verify that all control devices are properly connected.
   3. Verify that all dampers, valves, and other controlled devices, are operated by the intended controller.
   4. Verify that all dampers and valves are in the position indicated by the controller (open, closed or modulating).
   5. Verify the integrity of valves and dampers in terms of tightness of close-off and full open positions. This includes dampers in multizone units, terminal boxes and fire/smoke dampers.
   6. Observe that all valves are properly installed in piping system in relation to direction of flow and location.
   7. Observe the calibration of all controllers.
   8. Verify the proper application of all normally opened and normally closed valves.
   9. Observe the locations of all thermostats and humidistats for potential erratic operation from outside influences such as sunlight, drafts or cold walls.
   10. Observe the location of all sensors to determine whether their position will allow them to sense only the intended temperatures or pressures of the media. Control contractor will relocate as deemed necessary by the Engineer.
   11. Verify that the sequence of operation for any control mode is in accordance with the approved shop drawings and specifications. Verify that no simultaneous heating and

cooling occurs.

12. Verify the correct operation of all interlock systems and installation is per the manufacturer recommendations.
13. Check all dampers for free operation.
14. Verify that all controller setpoints meet the design intent.
15. Perform variable volume system verification to assure the system and its components track with changes from full flow to minimum flow.

D. Upon completion of the testing and balancing, submit three days prior notice that the systems are ready for a running test. A qualified representative of the test and balance organization shall be present, with a representative from the engineers office, to field verify TAB report readings. Specific and random selections of data recorded in the certified test and balance report will be reviewed.

3.5 INSTRUMENT TEST HOLES

A. When it is required to make holes in the field to measure temperature, static pressure or velocity in the ducts:
   1. Drill holes, plug and tape external duct insulation.
   2. Repair damaged insulation to Engineer’s approval.

3.6 TESTING THE AIR DISTRIBUTION SYSTEM

A. The TAB agency shall verify that all ductwork, dampers, grilles, registers, and diffusers have been installed per design and set full open. The TAB agency shall perform the following TAB procedures in accordance with the AABC National Standards and all results shall be recorded in the TAB report:
   1. Supply Fans:
      a. Fan speeds: Test and adjust fan RPM to achieve design CFM requirements.
      b. Current and Voltage: Test and record motor voltage and amperage, and compare data with the nameplate limits to ensure fan motor is not in or above the service factor.
      c. Pitot-Tube Traverse: Perform a Pitot-Tube traverse of the main supply and return ducts, as applicable, to obtain total CFM. If a Pitot-Tube traverse is not practical, an explanation of why a traverse was not made must appear on the appropriate data sheet. Measurements must be recorded with an Inclined Manometer or an Inclined/Vertical Manometer.
      d. Outside Air: Test and adjust the outside air on applicable equipment using a Pitot-Tube traverse. If a Pitot-Tube traverse is not practical, an explanation of why a traverse was not made must appear on the appropriate data sheet. If a traverse is not practical, use the mixed air temperature method, if the inside and outside temperature difference is at least 20°F, or use the difference between Pitot-tube traverse of the supply and return ducts.
      e. Static Pressure: Test and record system static pressure, including the static pressure profile of each supply fan.
   2. All Other Fans:
      a. Fan speeds: Test and adjust fan RPM to achieve design CFM requirements.
      b. Current and Voltage: Test and record motor voltage and amperage, and compare data with the nameplate limits to ensure fan motor is not in or above the service factor.
      c. Pitot-Tube Traverse: Perform a Pitot-Tube traverse of the main return ducts, as applicable, to obtain total CFM. If a Pitot-Tube traverse is not practical, an explanation of why a traverse was not made must appear on the appropriate data sheet. Measurements must be recorded with an Inclined Manometer or an Inclined/Vertical Manometer.
      d. Static Pressure: Test and record system static pressure, including the static pressure profile of each return fan.

3. VAV Terminal Units:
    a. Set and record volume regulators on all terminal boxes to meet design maximum and minimum CFM requirements.
    b. Identification: Identify the type, location, and size of each terminal unit. This information must be recorded on the terminal box data sheets.
4. Diffusers, Registers and Grilles:
    a. Tolerances: Test, adjust, and balance each diffuser, grille, and register to within 5% of design requirements. Minimize drafts. Observe throws are in direction as indicated on drawings.
5. Coils (including electric coils):
    a. Air Temperature: Once air flows are set to acceptable limits, take wet bulb (cooling coil only) and dry bulb air temperatures on the entering and leaving side of each coil. Calculate the sensible and latent (cooling coil only) capacity of the coil. Provide information in TAB report.

B. Record preliminary air handler data, including fan RPM and static pressures across filter, fans and coils.

C. Perform a velocity traverse of the main supply ducts using a pitot-tube and inclined manometer to establish initial air delivery. Perform a Pitot-tube traverse of main supply and return ducts, as applicable, to obtain total CFM. If a pitot-tube traverse is not practical, a detailed explanation of why a traverse was not made must appear on the appropriate data sheet.

D. Where air measuring stations are installed, use pitot tube traverse readings to verify and record the correct calibration of the stations output.

E. Make adjustments in fan RPM and damper settings, as required, to obtain design supply air, return air, and outside air.

F. Measure and adjust all supply and return branches to design air delivery.

G. Measure and adjust all diffusers to design air delivery to +/- 5% of design requirements.

H. Make a set of recordings showing final system conditions.

3.7 TESTING THE HYDRONIC SYSTEMS

A. The TAB agency shall, as applicable, verify that all hydronic equipment, piping, and coils have been filled and purged; that strainers have been cleaned; that water has been flushed and is in a clean condition, and that all balancing valves (except bypass valves) are set full open. As applicable, check air vents and expansion or compression tank for proper operation. The TAB agency shall perform the following testing and balancing functions in accordance with the AABC National Standards and all results shall be recorded in the TAB report:
1. Record preliminary pump data.
    a. Pump RPM.
    b. Pump shut-off differential head.
    c. Pump operating differential head.
    d. Check and verify pump alignment.
    e. Verify impeller diameter.

B. Adjust balancing valves in the pump discharge lines to obtain design water quantity as read from the manufacturer's pump curve and from a flow meter.

C. In variable flow systems, the water flow of the pump shall be set at the scheduled gpm, not the total of all the valves. Determine the diversity of the system and balance the individual coils with the maximum pump water quantity flowing in the system.

D. Balance flow through:
   1. Chillers.
   2. Coils.
   3. Boiler.
   4. Pumps
   5. Condensers.
   6. Cooling tower.
   7. Heat Exchanger.

E. Use flow meters, differential pressures and temperature relationships as required.

F. Balance by-pass lines to obtain the same pressure drop with systems on by-pass as full flow through the coil including the valve.

G. Repeat steps, as required, to obtain a final systems balance and make a set of recordings showing final systems conditions.

H. Pumps:
   1. Test and adjust pumps to meet design water flow requirements. Check pumps for proper operation. Pumps shall be free of vibration and cavitation Record appropriate gauge readings for final TDH and Block-Off\Dead head calculations. Check and verify pump alignment.
   2. Current and Voltage: Test and record motor voltage and amperage, and compare data with the nameplate limits to ensure pump motor is not in or above the service factor.

I. Coils:
   1. Tolerances: Test, adjust, and balance all chilled water and hot water coils within 5% of design flow requirements.
   2. Verification: Verify the type, location, final pressure drop and water quantity (GPM) of each coil. Calculate the actual capacity of all coils. This information shall be recorded on coil data sheets.

J. Boilers:
   1. Verify that boilers have been filled and started by others, and are in operation.
   2. Current and Voltage: As applicable, test and record motor voltage and amperage, and compare data with the nameplate limits to ensure motor is not in or above the service factor.
   3. Test, adjust and record water flows through water boilers.
   4. Test and record water temperature profiles of each boiler.

K. Chillers:
   1. Verify that chillers have been started by the manufacture and are in operation. Test and adjust chiller water flows to within 5% of the design requirements by using a U-TUBE manometer and setting balancing valves.
   2. Current and Voltage: Test and record motor voltage and amperage, and compare data with the nameplate limits to ensure compressor motor is not in or above the service factor.
   3. Test and record temperature profiles of each chiller at design water flow.

L. Cooling towers:
   1. Verify that cooling towers have been filled and started by others and are in operation.
   2. Current and Voltage: Test and record motor voltage and amperage, and compare data with the nameplate limits to ensure cooling tower fan motor is not in or above the service factor.
   3. Test and adjust water flows to balance tower cells and flows between towers.
   4. Test and record water temperature profiles of each condenser at design water flow for water and air side operation.

M. Heat exchangers:
1. Verify that heat exchangers have been filled and started by others, and are in operation.
2. Test and record temperature and pressure profiles of water and steam heat exchangers.

3.8 EQUIPMENT POWER READINGS

A. Record the following information for each motor:
1. Equipment designation.
2. Manufacturer.
3. Unit model number and serial number and frame.
4. Motor nameplate horsepower; nameplate voltage; phase and full load amperes.
5. Heater coil in starter.
a. Rating in amperes.
b. Manufacturer's recommendation.
6. Motor RPM/driven equipment RPM.
7. Power reading (voltage, amperes of all legs at motor terminals).

3.9 BOILERS

A. Check for proper operation and with operation at near design conditions, record the following:
1. Manufacturer, model number, serial number and nameplate.
2. If water type, water flow in GPM, entering and leaving water temperature and water pressure drop in feet.
3. Type of fuel and heating value.
4. Rate of fuel consumption.
5. Capacity in MBH.
6. Efficiency.
7. Flue gas analysis.
8. Motor data.

B. Observe demonstration that all controls and safety devices are functioning properly. Record observations.

3.10 CHILLERS (Water Cooled)

A. Balance flow of water thru each evaporator and condenser to be within a range of 100% to 110% of design flow with all pumps operating. With only one pump operating, the maximum flow shall not exceed the maximum tube velocity recommended by the manufacturer.

B. Verification of safety interlocks and controls are the responsibility of the manufacturer.

C. With each chiller operating at near design temperature and water flow conditions, measure and record the following:
1. Manufacturer, model number, serial number and all nameplate data.
2. Evaporator water entering temperature, leaving temperature, pressure drop (ft.) and water quantity (GPM).
3. Condenser water entering temperature, leaving temperature, pressure drop (ft.) and water quantity (GPM).
4. Evaporator and condenser refrigerant temperatures and pressures (using instruments furnished with the machine by the manufacturer).
5. Volts and amps for each phase.
6. Power factor.
7. KW input.
8. Tons of cooling.
9. KW per ton of cooling.

D. Reference chiller specification for additional requirements.

3.10 CHILLERS (Air Cooled)

A. Balance flow of water through each evaporator to be within a range of 100% to 110% of design flow with all pumps operating. With only one pump operating, the maximum flow shall not exceed the maximum tube velocity recommended by the manufacturer.

B. Verification of safety interlocks and controls are the responsibility of the manufacturer.

C. With each chiller operating at near design temperature conditions, measure and record the following:
1. Manufacturer, model number, serial number and all nameplate data.
2. Evaporator water entering temperature, leaving temperature, pressure drop (ft.) and water quantity (GPM).
3. Condenser air entering temperature, leaving temperature.
4. Evaporator and condenser refrigerant temperatures and pressures (using instruments furnished with the machine by the manufacturer).
5. Volts and amps for each phase.
6. Power factor.
7. KW input.
8. Tons of cooling.
9. KW per ton of cooling.

D. Reference chiller specification for additional requirements.

3.11 TESTING THE VARIABLE AIR VOLUME SYSTEM

A. All VAV boxes used are to be calibrated to produce the rated air quantity.

B. Set and record the supply air static pressure controller to provide actual design air flow at the most resistive terminal.

C. Measure and adjust the design air delivery at the inlet of each VAV box.

D. Measure and record the air quantity from each VAV box at its maximum flow. Manipulate the controller to achieve maximum flow.

E. Reset each box to yield and record minimum primary air flow.
1. DDC controllers record the correction factor required to establish actual desired air quantity as designed.
2. Pneumatic controllers adjust velocity controller as required to establish actual desired air quantity as designed.

F. If the box is operating with inlet static pressure in excess of the minimum cataloged pressure specified by the manufacturer and is not producing rated air quantity, field adjust the box to produce rated air quantity. Retest until approved results are obtained.

G. Position the VAV boxes to the proportion of maximum fan air volume to total installed box maximum volume.

H. Set the fan to deliver the AHUs scheduled design airflow.

I. Perform and record a total air traverse.

J. With the system terminal boxes set for full flow or diversity, the system will be delivering the scheduled design CFM with the most restrictive box in control. Make a speed increase if either or

both static and volume are low.

K. Set the boxes to minimum and adjust the inlet vanes and or speed controllers to prevent excessive static in the system.

L. Coordinate with the work specified in Building Management and Control System on the final location of the sensors for the static pressure controller. Locate in the supply duct far enough from the fan discharge to be truly representative of the average static pressure in the system.

M. Modulate the fan speed on the supply fan. Adjust as required to coordinate with the static pressure sensing network.

N. Make a set of recordings showing final system conditions including system duct static pressures and control system setpoint.

3.12 DUCT TEST

A. Test and Balancing Contractor shall verify and record the duct test results. A copy of the duct test results, as completed, shall be submitted to the engineer for review within five days. Provide a complete report of all the duct test results in the final TAB report.

3.13 DIRECT EXPANSION EQUIPMENT

A. With each unit operating at near design conditions, measure and record the following:
1. Manufacturer, model number, serial number and all nameplate data.
2. Ambient temperature, condenser discharge temperature.
3. Amperage and voltage for each phase.
4. Leaving and entering air temperatures.
5. Suction and discharge pressures and temperatures.
6. Tons of cooling.
7. Verification that moisture indicator shows dry refrigerant.

3.14 COOLING TOWERS

A. A complete CTI certified test of the cooling tower will be performed by others at the expense of the cooling tower manufacturer. A copy of this test (provided by others) shall be included in the final TAB Report. Balance the flow over and through bypass connections of the tower.

3.15 TAB REPORT

A. The activities described in this specification shall be recorded in a report form; and four individually bound copies shall be provided to the Architect and Engineer. Neatly type and arrange data. Include with the data the date tested, personnel present, weather conditions, nameplate record of the test instruments used and list all measurements taken after all corrections are made to the system. Record all failures and corrective action taken to remedy any incorrect situation. The intent of the final report is to provide a reference of actual operating conditions for the Owner's operations personnel. Provide a "Preface" which shall include a general discussion of the system and any abnormalities or problems encountered.

B. All measurements and recorded readings (of air, water, electricity, etc.) that appear in the report must have been recorded on site by the permanently employed technicians or engineers of the TAB firm.

C. Submit reports on forms approved by the engineer that will include the following data as a minimum:
1. Title Page
a. Company Name

b. Company Address
c. Company telephone number
d. Project name
e. Project location
f. Project Manager
g. Project Engineer
h. Project Contractor
I. Project Identification Number

2. Summary of the TAB report data
3. Index
4. Instrument List
   a. Instrument
   b. Manufacturer
   c. Model
   d. Serial Number
   e. Range
   f. Calibration Date
   g. What test instrument is to be used for:
5. Fan Data
   a. Location
   b. Manufacturer
   c. Model
   d. Air flow, specified and actual
   e. Total static pressure (total external) specified and actual
   f. Inlet pressure
   g. Discharge pressure
   h. Fan RPM
6. Return Air/Outside Air Data
   a. Identification/location
   b. Design return air flow
   c. Actual return air flow
   d. Design outside air flow
   e. Actual outside air flow
   f. Return air temperature
   g. Outside air temperature
   h. Required mixed air temperature
   I. Actual mixed air temperature
7. Electric Motors
   a. Manufacturer
   b. HP/BHP
   c. Phase, voltage, amperage, nameplate, actual
   d. PM
   e. Service Factor
   f. Starter size, heater elements, rating
8. V-Belt Drive
   a. Identification/location
   b. Required driven RPM
   c. Drive sheave, diameter and RPM
   d. Belt, size and quantity
   e. Motor sheave, diameter and RPM
   f. Center-to-center distance, maximum, minimum and actual
9. Duct Traverse
   a. System zone/branch
   b. Duct size
   c. Area
   d. Design velocity
   e. Design air flow

f. Test velocity
g. Test air flow
h. Duct static pressure
I. Air correction factor

10. Air Monitoring Station Data
    a. Identification/location
    b. System
    c. Size
    d. Area
    e. Design velocity
    f. Design air flow
    g. Test velocity
    h. Test air flow
11. Air Distribution Test Sheet
    a. Air terminal number
    b. Room number/location
    c. Terminal type
    d. Terminal size
    e. Correction factor
    f. Design velocity
    g. Design air flow
    h. Test (final) velocity
    i. Test (final) air flow
12. Pump Data
    a. Identification/number
    b. Manufacturer
    c. Size/model
    d. Impeller
    e. Service
    f. Design flow rate, pressure drop, BHP
    g. Actual flow rate, pressure drop, BHP
    h. Discharge pressure
    I. Suction pressure
    j. Total operating head pressure
    k. Shut off, discharge and suction pressures
    l. Shut off, total head pressure
    m. Pressure differential settings
13. Cooling Coil Data
    a. Identification/number
    b. Location
    c. Service
    d. Manufacturer
    e. Entering air DB temperature, design and actual
    f. Entering air WB temperature, design and actual
    g. Leaving air DB temperature, design and actual
    h. Leaving air WB temperature, design and actual
    i. Water pressure flow, design and actual
    j. Water pressure drop, design and actual
    k. Entering water temperature, design and actual
    l. Leaving water temperature, design and actual
    m. Air pressure drop, design and actual
    n. Capacity - sensible and latent
14. Heating Coil Data
    a. Identification/number
    b. Location
    c. Service
    d. Manufacturer

e. Entering air DB temperature, design and actual
f. Leaving air DB temperature, design and actual
g. Water pressure flow, design and actual
h. Water pressure drop, design and actual
i. Entering water temperature, design and actual
j. Leaving water temperature, design and actual
k. Air pressure drop, design and actual
l. Capacity

15. Electric Coil Data
    a. Identification/number
    b. Location
    c. Service
    d. Manufacturer
    e. Entering air DB temperature, design and actual
    f. Leaving air DB temperature, design and actual
    g. Electrical Characteristics
    h. Capacity
16. Sound Level Report
    a. Location (Location established by the design engineer)
    b. N C curve for eight (8) bands-equipment off
    c. N C curve for eight (8) bands-equipment on
17. Vibration Test on equipment having 10 HP motors or greater in size.
    a. Location of points:
        1) Fan bearing, drive end
        2) Fan bearing, opposite end
        3) Motor bearing, center (if applicable)
        4) Motor bearing, drive end
        5) Motor bearing, opposite end
        6) Casing (bottom or top)
        7) Casing (side)
        8) Duct after flexible connection (discharge)
        9) Duct after flexible connection (suction)
    b. Test readings:
        1) Horizontal, velocity and displacement
        2) Vertical, velocity and displacement
        3) Axial, velocity and displacement
    c. Normally acceptable readings, velocity and acceleration
    d. Unusual conditions at time of test
    e. Vibration source (if non-complying)
18. Control verification indicating date performed and any abnormalities identified.
    a. Point Location/Description
    b. EMS Readout (Setpoint and Actual)
    c. Actual Readout of all points
    d. Interlocks
    e. Safeties
    f. Variable speed drive tracking with EMS input
    g. Variable speed drive Bypass operation
    h. Sequence of operation

END OF SECTION

SECTION 23 05 94

COORDINATION OF TESTING AND BALANCING

PART 1 - TESTING, BALANCING AND ADJUSTING

1.1 WORK INCLUDED

A. Balancing and adjusting of the environmental systems is specified in Section 23 05 93.

B. Coordination of the work is specified in this Section.

PART 2 - PRODUCTS / NOT USED

PART 3 - EXECUTION

3.1 COORDINATION

A. Bring the work to a state of readiness for testing, balancing, and adjusting.
   1. Install air terminal devices.
   2. Provide specified filters in air handling equipment. Install clean filters just prior to the start of the test and balance work.
   3. Verify lubrication of equipment.
   4. Install permanent instrumentation.
   5. Clean piping systems and fill with clean water.
   6. Complete "Start-up" of equipment.
   7. Check rotation and alignment of rotating equipment and tension of belted drives.
   8. Verify ratings of overload heaters in motor starters.
   9. Verify that safety and operating control set points are as designed and automatic control sequences have been checked.
   10. Provide control diagrams and sequence of operation.
   11. Collect material for maintenance manuals and prepare one manual especially for use in testing and balancing.
   12. Verify that graphic operational data such as start/stop instructions, valve tag schedules, and piping identification schedules have been provided where needed.
   13. Verify that equipment and piping identification work has been completed with valve tags, schedules, and piping identification system.
   14. Comb out fins on extended-surface heat transfer coils where damaged.
   15. Clean all strainers as required.
   16. Remove construction strainers after water is cleaned and treated.
   17. Remove all temporary filters from HVAC equipment.
   18. Provide start-up reports listing all start-up information and manufacturer’s information attached.

B. Provide and install new pulleys and belts as required to effect the correct speed ratio. Adjustments where no belt or pulley change is required, is specified in Section 23 05 93.

C. Verify that the systems are ready for balancing and adjusting.

D. Submit a letter stating:
   1. The specified pieces of equipment have been checked, started, and adjusted by the manufacturer.
   2. Other equipment has been checked and started.
   3. The systems have been operated for the specified period of time.
   4. The automatic controls system has been adjusted, calibrated, and checked, and is

operating as specified.

E. Provide the services of a technician full time at all times at the project when testing, balancing and adjusting work is being conducted.

F. Provide instrumentation and services to take readings of the required data for the refrigerant circuits.

G. Provide and install volume dampers required for balancing by the TAB Contractor.

3.2 START-UP OF EQUIPMENT

A. Pre-start & Start-up equipment using the procedures as recommended by the manufacturers.

B. Complete start-up of equipment prior to start of testing & balancing.

C. Submit start-up procedures as outlined by the manufacturers and complete the "HVAC FAN / AIR HANDLING / START-UP REPORT FORM" to Engineer.

HVAC FAN / AIR HANDLING UNIT / START-UP REPORT FORM														
Equipment Description	*Actual*			*Disc. Switch Wired*	*Rotation Correct*	*Belt*		*RPM Correct Submittal*	*Vibration Isolation Correct*	*Attachment To Roof Curb*	*List Of Damage Parts*	*Bearings Lubricated*	*Filter Installed*	*Interlocks & Dampers Operational*
						Condition & Part #	*Tension Correct*							
	Voltage	*Amps*	*HP*											

END OF SECTION

SECTION 23 07 16

VESSEL INSULATION

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Furnish and install insulation for both high and low temperature vessels.

B. Low temperature installations include expansion tanks, air eliminators, chiller nozzles, chiller heads and other vessels containing liquids 60°F and below.

C. High temperature installations include expansion tanks, air eliminators, domestic water storage tanks, boiler stack / transition and other vessels containing liquids above 60°F.

1.2 QUALITY ASSURANCE

A. The intent of insulation specifications is to obtain superior quality workmanship resulting in an installation that is absolutely satisfactory in both function and appearance. Provide insulation in accordance with the specifications for each type of service and apply as recommended by the manufacturer and as specified.

B. An approved contractor for this work under this Division shall be:
1. A specialist in this field and have the personnel, experience, training, skill, and the organization to provide a practical working system.
2. Able to furnish evidence of having contracted for and installed not less than 3 systems of comparable size and type that have served their owners satisfactorily for not less than 3 years.

C. All vessel insulation used on the project inside the building must have a flame spread rating not exceeding 25 and a smoke developed rating not exceeding 50, as determined by test procedures ASTM E 84, NFPA 255 and UL 723. These ratings must be as tested on the composite of insulation, jacket or facing, and adhesive. Components such as adhesives, mastics and cements must meet the same individual ratings as the minimum requirements and bear the UL label.

D. Condensation on any insulated vessel system is not acceptable.

E. Replace insulation damaged by either moisture or other means. Insulation that has been wet, whether dried or not, is considered damaged. Make repairs where condensation is caused by improper installation of insulation, also repair any damage caused by the condensation.

F. Where existing insulated vessel, or other surfaces are tapped, remove existing insulation back to undamaged sections for hot surfaces or to nearest insulation stop for cold surfaces, and replace with new insulation of the same type and thickness as existing insulation. Apply as specified for insulation of the same service.

1.3 APPROVALS

A. Submit product data on each insulation type, adhesive, and finish to be used in the work. Make the submittal as specified in Division 1 General Requirements and obtain approval before beginning installation. Include product description, list of materials and thickness for each service and location and the manufacturer's installation instructions for each product.

B. Make an application of each type of insulation to display the material, quality and application method. Obtain approval of the sample application before proceeding with installation of the work.

1.4 RELATED WORK

A. Division 9 Finishes. Painting and color-coding

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Glass fiber pipe & tank insulation:
   1. Schuller Type 817
   2. Owens-Corning Type 705
   3. Knauf 2.8 PCF

B. Aluminum Jacketing:
   1. Childers
   2. Pabco
   3. RPR

C. Monel Staples
   1. Bostich Monel
   2. Duo-Fast Monel
   3. Markwell Monel

D. Fiberglass reinforcing cloth mesh:
   1. Perma Glass Mesh
   2. Alpha Glass Mesh
   3. Childers Chil-Glas
   4. Foster Mast a Fab

2.2 CEMENT, MASTICS, SEALANTS, ADHESIVES AND COATINGS

A. Adhesive: Provide Childers CP-127 or Foster 85-60 fiberglass adhesive to seal insulation for low temperature vessels.

B. Lagging Adhesive / Coating: Furnish Childers CP50AHV2 or Foster 30-36 lagging adhesive / coating to provide a finish coat and to secure finish cloth for high temperature vessels.

C. Insulation Joint Sealant: Use Childers CP-76 or Foster 95-50 to seal the joints of insulation on low temperature vessels.

D. Metal Jacketing Sealant: Use Childers CP-76 or Foster 95-44 on all metal jacketing laps outdoors.

E. Vapor Barrier Coating: Indoors - Use Childers CP-38 or Foster 30-80 vapor barrier coating finish to coat the canvas finish on low temperature vessels. Permeance shall be 0.013 perms or less as tested by ASTM E96. Coating must comply with MIL-C-19565C, Type II and be QPL listed. Permeance shall be 0.03 perms or less at 30 mils, dry. Tested at 100°F and 90% RH per ASTM F 1249 and by Hypalon rubber based.

F. Weather Barrier Mastic: Furnish Childers CP-10/11 or Foster 46-50 weather barrier mastic and reinforcing mesh for outdoor finish.

G. Reinforcing Mesh: Furnish 10 X 10 white glass or polyester reinforcing mesh.

PART 3 - EXECUTION

3.1 LOW AND HIGH TEMPERATURE VESSELS (FIBERGLASS)

A. Apply a first layer of insulating board. Band the board on immediately after application, using bands on 12” centers, drawn tight and securely fastened.

B. Apply successive layers of insulation as specified for the first layer, with joints staggered. After insulation has been applied, finish with Childers CP-38 or Foster 30-80 vapor barrier coating reinforced with glass or polyester reinforcing mesh per manufacturer's recommendations. Provide a flood coat of Childers CP-10/11 or Foster 46-50 with Foster Mast a Fab polyester or Chil Glas #10 reinforcing mesh.

C. To insulate removable heads, provide two equal sections of heavy-gauge, galvanized sheet metal covers, angle reinforced and lined with insulation board. Make covers easily removable to allow free access to the heads for inspection, cleaning and dismantling. Provide suitable flanges on the sections with neoprene gaskets between them, permitting a tight seal when the two sections are bolted together. Fill the voids with glass fiber wall cavity insulation.

3.2 ALUMINUM JACKETING (Insulated vessels outdoors above grade)

A. Apply aluminum jacket on vessels according to manufacturer's recommendations using aluminum strapping and metal jacketing sealant to provide weather tight covering.

B. Aluminum jacketing is not considered as contributing to the vapor barrier or the insulation jacket. The vapor barrier must be sufficient in itself for this function.

C. Install straps on 12” centers.

3.3 VESSEL INSULATION REQUIREMENTS

A. Insulate all low and high temperature vessels located exterior (outside) of the building, including the following:
   1. Air separators
   2. Expansion Tanks
   3. Chemical feeders
   4. Chilled water system volume tanks
   5. Insulation thickness shall match thickness of adjoining pipe insulation

B. Insulate all low temperature vessels located interior (inside of the building, including the following:
   1. Air separators
   2. Chemical feeders
   3. Chilled water system volume tanks
   4. Insulation thickness shall match thickness of adjoining pipe insulation

C. Insulate the following high temperature vessels located interior (inside the building).
   1. Air Separators
   2. Insulation thickness shall match thickness of adjoining pipe insulation

D. As indicated on the drawings

END OF SECTION

SECTION 23 07 19

HVAC PIPING INSULATION

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Furnish and install piping insulation, jackets, accessories and covering of specified materials. The insulation shall be used for high and low temperature piping applications including hot water, refrigerant lines, condensate piping and make-up water.

1.2 QUALITY ASSURANCE

A. The intent of insulation specifications is to obtain superior quality workmanship resulting in an installation that is absolutely satisfactory in both function and appearance. Provide insulation in accordance with the specifications for each type of service and apply as recommended by the manufacturer and as specified.

B. An approved contractor for this work under this Division shall be:
   1. A specialist in this field and have the personnel, experience, training, skill, and the organization to provide a practical working system.
   2. Able to furnish evidence of having contracted for and installed not less than 3 systems of comparable size and type that have served their owners satisfactorily for not less than 3 years.

C. All piping insulation used on the project inside the building must have a flame spread rating not exceeding 25 and a smoke developed rating not exceeding 50, as determined by test procedures ASTM E 84, NFPA 255 and UL 723. These ratings must be as tested on the composite of insulation, jacket or facing, and adhesive. Components such as adhesives, mastics and cements must meet the same individual ratings as the minimum requirements and bear the UL label.

D. Condensation on any insulated piping system is not acceptable.

E. Replace insulation damaged by either moisture or other means. Insulation that has been wet, whether dried or not, is considered damaged. Make repairs where condensation is caused by improper installation of insulation. Also repair any damage caused by the condensation.

F. Where existing insulated piping, or other surfaces are tapped, remove existing insulation back to undamaged sections for hot surfaces or to nearest insulation stop for cold surfaces, and replace with new insulation of the same type and thickness as existing insulation. Apply as specified for insulation of the same service.

1.3 SUBMITTALS

A. Submit product data on each insulation type, adhesive, and finish to be used in the work. Make the submittal as specified in General Requirements and obtain approval before beginning installation. Include product description, list of materials and thickness for each service and location and the manufacturer's installation instructions for each product.

B. Make a field application of each type of insulation to display the material, quality and application method. Obtain approval of the sample application before proceeding with installation of the work.

1.4 RELATED WORK

A. Finishes. Painting and color-coding

B. Pipe Heat Tracing

PART 2 PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Glass fiber pipe insulation:
   1. Johns-Manville Micro-Lok AP-T
   2. Owens-Corning ASJ/SSL
   3. Knauf ASJ/SSL

B. Cellular Glass Insulation (Foamglass):
   1. Pittsburg Corning
   2. Cell-U-Foam

C. Rigid Foam Insulation:
   1. Kingsapan Tarec
   2. Dow Trymer
   3. Tarec Ecophen – Phenolic Foam

D. Aluminum Jacketing:
   1. ITW Lock-on (Childers)
   2. ITW Z-lock (Pabco)

E. Fiberglass reinforcing cloth mesh:
   1. Perma Glass Mesh
   2. Alpha Glass Mesh
   3. Childers Chil-Glas
   4 Foster Mast a Fab
   5. Vimasco

F. Mastics, Sealants, Coatings and Adhesives
   1. Childers
   2. Foster
   3. Vimasco
   4. Armacell 520 Adhesive

G. Elastomeric Insulation
   1. Armacell

H. Weather Resistant Coating
   1. WB Armaflex Finish
   2 Foster 30-64

I. Glass fiber blanket insulation
   1. Manville R-series Microlite FSKL
   2. Owens-Corning eD75 or ED100 RKF
   3. Knauf 0.75 PCF FSK

2.2 RIGID FOAM PIPE INSULATION

A. Polyisocyanurate pipe insulation or phenolic foam pipe insulation, with all service reinforced vapor barrier jacket having integral laminated vapor barrier.

1. Polyisocyanurate: Thermal conductivity 0.14 @ 75°F mean (ASTM C518).
2. Phenolic Foam: Thermal conductivity 0.13 @ 75°F mean (ASTM C 518); minimum 2.5# density.
3. Polyisocyanurate is not to be used inside of buildings without 25/50 rating.

2.3 FIBERGLASS PIPE INSULATION

A. Heavy density, dual temperature fiberglass insulation with factory applied, all service, reinforced vapor barrier jacket having integral laminated vapor barrier. Provide with a factory applied pressure sensitive tape closure system and matching butt strips. Supply in thickness as shown.
1. Thermal conductivity 0.23 @ 75°F mean (ASTM 335).

2.4 ELASTOMERIC INSULATION

A. Insulation material shall be flexible, closed-cell elastomeric insulation in tubular or sheet form. Material shall have a flame spread rating of 25 or less and a smoke developed rating of 50 or less when tested in accordance with ASTM E84, latest revision. Sheet material with a thickness greater than ¾" shall have a flame spread rating of 25 or less and a smoke developed rating of 100 or less when tested in accordance with ASTM E84, latest revision. In addition, the product, when tested, shall not melt or drip flaming particles, and the flame shall not be progressive. In addition, all materials shall pass simulated end-use fire test.
1. Thermal conductivity 0.27 at 75°F mean (ASTM C177 or C518)

2.5 CELLULAR GLASS INSULATION

A. ASTM C552:
1. "k" value of 0.35 @ 75°F ("ksi" value of 0.047 @ 24°C);
2. 8.0 lb/cu.ft. (128 kg/cu.m.) density

2.6 INSULATION/SHIELD AT HANGERS

A. Field fabricated: Use 360° sections of rigid foamglass insulation that will support the bearing area at hangers and supports. Further support insulation at hangers and supports with a shield of galvanized metal covering at least half of the pipe circumference, and conforming to the schedule. Insulation shall extend at least 1" beyond metal shield on each end. When pipe is guided at top and bottom, metal shields shall cover the whole pipe circumference. Adhere metal shield to insulation so that metal will not slide with respect to insulation with ½" aluminum bands (2) per shield.
1. Sections of foam glass insulation may be used of the same outside diameter of the adjoining pipe insulation.
2. Minimum thickness of foam glass insulation shall not be less than 1" thick.

B. Pipe saddles: Formed galvanized sheets at each support point for insulated pipe, shaped to fit pipe, and covering bottom half of pipe. Length at saddle shall be not less than twice the insulation outside diameter or more than 22". Provide 18 gauge through 4" pipe and 16-gauge 5" pipe and above.

2.7 SEALANT, ADHESIVE AND FINISH

A. Lap Adhesive. Provide Childers CP-82 or Foster 85-20 adhesive.

B. Vapor Barrier Finish:
1. Indoors: Provide as insulation coating Childers CP-38 or Foster 30-80, white. Coating must meet MIL Spec C-19565C, Type II and be QPL Listed. Permeance shall be 0.013 perms or less at 43 mils dry. Tested at 100ºF and 90% RH per ASTM E96.

2. Outdoors: Provide as insulation coating Childers Encacel X or Foster 60-90. Permeance shall be 0.03 perms or less at 30 mils dry. Tested at 100ºF and 90% RH per ASTM F 1249 and must be Hypalon rubber based.
3. Underground: Provide Childers CP-22/24 or Foster 60-25/26 for fittings and areas. Pittwrap cannot be used.

C. Insulation Joint Sealant. Provide Childers CP-76 or Foster 95-50 vapor barrier sealant.

D. Metal Jacketing Sealant. Provide Childers CP-76 or Foster 95-44 metal jacketing sealant for all outdoor metal jacketing laps.

E. Lagging Adhesive. Provide Childers CP-50AMV1 or Foster 30-36.

F. Other products of equal quality will be acceptable only upon approval.

2.8 ALUMINUM JACKETING

A. Finish insulated piping outdoors with a smooth prefabricated Z-lock aluminum jacket 0.016" thick with factory applied 1 mil polyethylene/40 lb and Fab strap. Kraft moisture barrier.

B. Valves, Fittings and Flanges. For finishing valves, fittings, flanges and similar installations, provide formed aluminum covers, 0.024" thick.

C. Straps and Seals. Provide ½" x 0.020 stainless steel strapping and seals for jackets and covers according to manufacturer's recommendations.

2.9 GLASS FIBER BLANKET INSULATION

A. Minimum density of 1.0 PCF, 2" thick, installed R value to be 6.0 or better at 75°F mean, facing of 0.35 mil foil reinforced with glass yarn mesh and laminated to 40 lbs fire resistant kraft.

PART 3 - EXECUTION

3.1 INTERIOR PIPING

A. Cover all piping with glass fiber, heavy density, dual temperature pipe insulation with a vapor barrier jacket. Apply insulation to clean, dry pipes. Longitudinal seams shall be joined firmly together and sealed with self-sealing lap joints. Butt insulation joints firmly together and seal with a 3" wide ASJ butt strip seal. Longitudinal seams and butt strip laps shall be coated and sealed with CP-38 or Foster 30-80 vapor barrier coating for chilled water piping applications.

B. Install hanger with protective shield, on the outside of all insulation.

C. Where domestic water pipes (1/2" & ¾" pipe sizes) are installed on trapeze type hangers, provide galvanized sheet metal protection shields at these locations. Place insulation jacket directly on hanger. Incompressible, load bearing insulation segments are not required.

D. Pipe Saddles: Formed galvanized sheets at each support point for insulated pipe, shaped to fit pipe, and covering bottom half of pipe. Length at saddle shall be not less than twice the insulation outside diameter. Provide 18-gauge through 4" pipe and 16-gauge for 5" pipe and above.

E. Seal ends of pipe for chilled water insulation with vapor barrier mastic at valves, flanges, fittings and every 21' on straight runs of piping. Mastic should extend on top of ASJ jacket, across the glass, down onto the pipe making a complete seal.

F. Apply a smooth flood coat of white lagging adhesive Foster 30-35 or Childers CP-35 over all exposed insulation within mechanical rooms.

G. Piping to be insulated as specified above:
1. Chilled water and heating water
2. Domestic hot and cold water
3. Make-up water
4. Horizontal sanitary drain piping that receives condensate
5. Exposed to view storm drainage system including roof and overflow drain bodies, vertical piping from drain body to elbow, all horizontal rain leaders, and first elbow turning down
6. Condenser water

3.2 REFRIGERANT AND CONDENSATE PIPING

A. Cover all pipe with elastomeric insulation by slitting tubular sections or sliding unslit sections over the open ends of piping or tubing. Seams and butt joints shall be adhered and sealed using Foster 85-75, Childers CP-82 or Armstrong 520 Adhesive.

B. All fittings shall be insulated with the same insulation thickness as the adjacent piping. All seams and mitered joints shall be adhered with Foster 85-75, Childers CP-82 or 520 Adhesive.

C. Pipe Saddles: Formed galvanized sheets at each support point for insulated pipe, shaped to fit pipe, and covering bottom half of pipe. Length at saddle shall be not less than twice the insulation outside diameter.

D. Outdoor exposed piping shall be painted with two coats of either WB or SB Armaflex finish or Foster 30-64 elastomer foam coating. All seams shall be located on the lower half of the pipe.

E. Outdoor exposed piping after being sealed as noted above apply aluminum jacketing to protect piping insulation exposed to weather, from damage from sunlight, moisture, equipment maintenance, wind, and shall provide shielding from solar radiation. Adhesive Tape shall not be permitted.

3.3 PIPING OUTDOORS ABOVE GRADE

A. Insulate all water piping exterior of building above grade with rigid foam insulation and aluminum jacketing.

B. Adhere the vapor barrier jacket longitudinal seam with vapor barrier adhesive.

C. Cover all valves, fittings and flanges with factory made molded or field fabricated segments of pipe insulation of a thickness and material equal to the adjoining insulation. Adhere segments together with no voids, using Childers CP-82 or Foster 85-20 adhesive. Secure fitting insulation covers and segments in place with ½” wide glass filament tape.

D. Apply a tack coat of fitting vapor barrier coating over the insulation and tape.

E. Neatly embed with 10 x 10 fiberglass or polyester reinforcing mesh into the tack coat.

F. Apply coating over the fiberglass cloth to a thickness where the mesh is not visible after completion.

G. Seal ends of pipe insulation with vapor barrier coating at valves, flanges, fittings and every 21' on straight runs of piping. Mastic should extend on top of ASJ jacket, across the foam, down onto the pipe, making a complete seal.

H. Finish with aluminum jacketing as specified.

3.4 UNDERGROUND PIPE COVERING

A. Cover chilled and hot water piping underground with cellular glass insulation.

B. Butter insulation joints with Childers CP-76 or Foster 95-50 vapor barrier sealant. Secure with stainless steel bands or ½" fiberglass reinforced tape on 9" centers.

C. Cover valves and flanges with fabricated fittings of thickness and material equal to the adjoining insulation. Fasten fittings in place with stainless steel bands or ½" fiberglass reinforced tape.

D. Apply a tack coat of fitting mastic Childers CP-22/24 or Foster 60-25/26 over the insulation and bands.

E. Neatly embed with 10 x 10 fiberglass or polyester reinforcing mesh into the tack coat.

F. Apply mastic over the fiberglass cloth to a thickness where the fabric is not visible after completion.

G. Seal ends of pipe insulation with vapor barrier mastic at all valves, fittings, flanges and every 21' on straight run piping. Mastic should extend on top of ASJ jacket, across the glass, down onto the pipe, making a complete seal.

H. Finish with 125 mil thickness Pittwrap jacket applied in accordance with manufacturer's instructions. At contractor's option, cover insulation with Servi-Wrap P-500 installed in accordance with manufacturer's instructions.

3.5 FLANGE, VALVE AND FITTING INSULATION

A. Cover valves and flanges with fabricated segments, fittings with two-piece factory molded fittings, and both of matching pipe insulation type and thickness equal to that of the adjoining pipe. Fittings and fabricated segments shall be securely held in place.
   1. Apply a tack coat of insulating coating/mastic to the insulated fitting to produce a smooth surface.
   2. After mastic is dry, apply a second coat of vapor barrier coating/mastic. Neatly embed with 10 x 10 fiberglass or polyester reinforcing mesh into the tack coat.
   3. Overlap coating/mastic and fiberglass/polyester reinforcing mesh by 2" on adjoining sections of pipe insulation.
   4. Apply a second coat of coating/mastic over the fiberglass/polyester reinforcing mesh to present a smooth surface.
   5. Apply coating/mastic to a wet film thickness of 3/64".
   6. Fabric shall not be visible after completion.
   7. Vapor seal flanges, valves and fittings with Childers CP-38 or Foster 30-80. Coating must meet MIL Spec C-19565C, Type II and be QPL Listed. Permeance shall be 0.013 perms or less at 43 mils dry. Tested at 100ºF and 90% RH per ASTM E96.

B. PVC fitting covers are not acceptable.

3.6 ALUMINUM JACKETING (Insulated Piping Outdoors Above Grade)

A. Apply smooth aluminum jacket on piping, valves, fittings and flange covers according to manufacturer's recommendations, using stainless steel strapping and seals, to provide weather tight covering and to shed water.

B. Aluminum jacketing is not considered as contributing to the vapor barrier or the insulation jacket. The vapor barrier must be sufficient in itself for this function. Lap each adjoining jacket section a minimum of 3” to make a weather tight seal with the application of 1/8” bead of Childers CP-76 or Foster 95-44 metal jacketing sealant.

C. Install straps on 9” centers and at each circumferential lap joint.

D. Cover and seal all exposed surfaces.

E. The use of screws and rivets is not approved.

F. Provide isolation (30# felt) between the aluminum jacket and the sheetmetal protection shield at each pipe support point.

3.7 MISCELLANEOUS

A. Insulate pumps.

B. Install materials after piping has been tested and approved.

C. Apply insulation on clean, dry surfaces only.

D. Apply weather protective finish on elastomeric insulation installed in non-conditioned spaces. Provide a minimum of three coats.

3.8 INSULATION THICKNESS

INSULATED UNIT	THICKNESS (Inches)
Exterior Chilled and Hot Water Piping, 5” Pipe and Larger	2
Exterior Chilled and Hot Water Piping 4” Pipe and Smaller	1-1/2

END OF SECTION

SECTION 23 09 33

BUILDING MANAGEMENT AND CONTROL SYSTEM

PART 1 - GENERAL

1.1 SCOPE

A. The existing campuses are controlled by Automated Logic Control systems installed by UES Houston. The existing controls end devices shall be removed and reinstalled by ALC as required for chiller replacements. Existing control sequences shall be maintained and recommissioned by ALC upon completion on replacements. All new equipment shall be fully integrated into the existing control system including new graphics for all new equipment and is a part of this scope.

B. Temperature Control System components:
   1. Electronic instruments as specified
   2. Electric instruments as specified
   3. Microcomputer instruments as specified

C. All control devices of the same type product shall be of a single manufacturer.

D. Control, power and interlock wiring necessary to accomplish sequences specified in this Section shall be provided and installed by the Control Subcontractor. Materials and methods of execution as specified in Division 26, Electrical.
   1. Coordinate current characteristics of all electrical instruments and equipment with Division 26 of the specifications and related electrical drawings.

E. The entire Building Management and Control System (BMCS) shall be installed by the Automation System Manufacturer or Authorized Distributor.
   1. All components and elements
   2. The testing and acceptance procedure

F. The manufacturer of the building automation system shall provide documentation supporting compliance with ISO-9002 (Model for Quality Assurance in Production, Installation, and Servicing). The intent of this specification requirement is to ensure that the products from the manufacturer are delivered through a Quality System and Framework that will assure consistency in the products delivered for this project.

G. The entire Building Management and Control System (BMCS) shall be installed, Commissioned, and tested; all performed by the Automation System Manufacturer or Authorized Distributor if approved by engineer.
   1. All components and elements.
   2. Start-up and point verification.
   3. The testing and acceptance procedure.

1.2 RELATED WORK

A. Division 23, Mechanical

B. Division 26, Electrical

1.3 SUBMITTALS

A. Submit items of the Building Management and Control System (BMCS).
   1. Temperature control equipment & Field devices.

2. Wiring & Flow diagrams.
3. Sequence of operation.
4. Complete, detailed, control and interlock-wiring diagram.
5. Indicate mechanical and electrical equipment furnished and electrical interlocks, indicating terminal designation of equipment. Respective equipment manufacturers shall furnish through the Mechanical Contractor, approved drawings of equipment to be incorporated in this diagram.
6. Submit Input / Output summary of all points.
7. Submit an outline of testing procedures from section Testing and Acceptance.
8. Mark up a copy of the specifications for the product. Indicate in the margin of each paragraph the following: “Comply, “Do Not Comply”, or “Not Applicable”. Explain all “Do Not Comply” statements.
9. Submit sample of space temperature sensor and guards for review prior to purchase or installation.

1.4 COOPERATION WITH OTHER TRADES

A. Furnish control valves, temperature sensing element wells, flow and pressure sensing devices, dampers and other similar devices to the Mechanical Contractor in a timely manner for installation under the Building Management and Control System (BMCS), Subcontractor's supervision.

1.5 WARRANTY

A. Provide with a manufacturer’s parts and labor warranty for a period of two years from substantial completion.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Automated Logic Branch Office - WebCTRL

2.2 SYSTEM ARCHITECTURE

A. The Building Management and Control System (BMCS) shall consist of an information-sharing network of stand-alone Direct Digital Control Panels (DDCP) to monitor and control equipment as specified of the control sequence and input/output summary.

B. "Information sharing" shall be defined as: The function of each DDCP to exchange data on the network trunk with other DDCP's without the need for additional devices such as network managers, gateways or central computers.

C. "Stand-alone" shall be defined as: The function of each DDCP to independently monitor and control connected equipment through its own microcomputer.

2.3 COMMUNICATIONS PROCESSING

A. The BMCS shall operate as a true token-pass peer-to-peer communication network. Resident processors in each DDCP shall provide for full exchange of system data between other DDCP's on the network trunk. Systems that limit data exchange to a defined number of system points are not acceptable.

B. Systems that operate via polled response or other types of protocols that rely on a central processor or similar device to manage DDCP to DDCP communications may be considered only if a similar device is provided as a stand-by. Upon a failure of malfunction of the primary device, the stand-by

shall automatically, without any operator intervention, assume all BMCS network management activities.

C. The failure of any DDCP on the network shall not affect the operation of other DDCP's. All DDCP failure shall be annunciated at the specified alarm printers and terminals.

D. Network shall support a minimum communications speed of 115.2 Kbps.

E. The network shall support a minimum of 100 DDC controllers and PC workstations.

F. Each PC workstation shall support a minimum of 4 peer-to-peer networks, either by hardwired connection or dial up.

G. The system shall support integration of third party systems (fire alarm, security, lighting, PCL, chiller, boiler) via panel mounted open protocol processor. This processor shall exchange data between the two systems for inter-process control. All exchange points shall have full system functionality as specified herein for hardwired points. Provide examples of 5 reference projects utilizing gateways required for this project.

2.4 DDCP HARDWARE

A. Each DDCP shall consist of a 32-bit microprocessor and controller, power supply, input / output boards and communication board. All program and point databases shall be stored in battery-backed RAM. Provide a minimum of 1.2 MEG RAM in each DDCP to allow for point expansion and trend data storage.

B. Each DDCP shall incorporate a real-time clock.

C. Each DDCP shall be provided with two RS232 communications port. Connecting an operator terminal, whether portable or stationery, shall allow the user to communicate with the entire network.

D. Each DDCP shall provide for input / output connections to field equipment. The following point types shall be supported:
1. Analog inputs - for measuring sensed variables. Inputs shall be capable of accepting voltage, resistance, current or pressure signals.
2. Analog outputs - for controlling end devices. Outputs shall be capable of producing voltage, resistance, current or pressure signals. Pneumatic outputs shall be provided with a manual override for adjusting outputs in the event of a power loss at the DDCP.
3. Digital inputs - for monitoring dry contacts such as relays, switches, pulses, etc.
4. Digital outputs - to control two position devices such as starters, actuators, relays, etc.

E. Each DDCP shall be listed under UL916 (Energy Management Systems), and shall be tested to comply with sub-part J of Part 15 FCC rules for Class A computing equipment.

F. Each DDC Controller shall have sufficient memory to support its own operating system and databases, including:
1. Control processes
2. Energy management applications
3. Alarm management applications including custom alarm messages for each level alarm for each point in the system.
4. Historical/trend data for points specified
5. Maintenance support applications
6. Custom processes
7. Operator I/O

8. Dial-up communications
9. Manual override monitoring

G. Operator shall have the ability to manually override automatic or centrally executed commands at the DDC Controller via local, point discrete, on-board hand/off/auto operator override switches for digital control type points and gradual switches for analog control type points.
1. Switches shall be mounted either within the DDC Controllers key-accessed enclosure, or externally mounted with each switch keyed to prevent unauthorized overrides.
2. DDC Controllers shall monitor the status of all overrides and inform the operator that automatic control has been inhibited. DDC Controllers shall also collect override activity information for reports.

H. DDC Controllers shall provide local LED status indication for each digital input and output for constant, up-to-date verification of all point conditions without the need for an operator I/O device. Graduated intensity LEDs or analog indication of value shall also be provided for each analog output. Status indication shall be visible without opening the panel door.

I. In the event of the loss of normal power, there shall be an orderly shutdown of all DDC Controllers to prevent the loss of database or operating system software. Non-volatile memory shall be incorporated for all critical controller configuration data and battery backup shall be provided to support the real-time clock and all volatile memory for a minimum of 72 hours.
1. Upon restoration of normal power, the DDC Controller shall automatically resume full operation without manual intervention.
2. Should DDC Controller memory be lost for any reason, the user shall have the capability of reloading the DDC Controller via the local RS-232C port, via telephone line dial-in or from a network workstation PC.
3. Upon restoration of normal power, the DDC Controller shall automatically resume full operation without manual intervention.

2.5 PROGRAMMING FUNCTIONS

A. Resident software in each DDCP shall provide custom programming of control strategies.
1. Point database
2. Operator interface
3. Network communications
4. Facilities and energy management functions

B. Programming of control and energy management strategies shall be accomplished via a high-level computer language such as BASIC, JC BASIC, C, or Powers Process Control Language. A standard math processor shall be part of the programming language. All analog loops shall be capable of proportional, integral and derivative control.

C. Each DDCP shall incorporate an operator interface program (OIP) that provides an English language user interface. The OIP shall allow the user to program, interrogate, command and edit the BMCS via a self-prompting method. Operator terminals, whether textual or graphical, shall be able to access the entire network from any DDCP. Access shall be accomplished in a transparent fashion; that is, the operator shall not be required to address specific DDCP's in order to display or command system points.

2.6 FACILITY MANAGEMENT SOFTWARE

A. The BMCS shall be provided with standard and custom report generation functions that include:
1. Alarm summaries
2. Motor status summaries
3. Point displays by type, system, status, overrides, failures, location, equipment and

enabled/disabled.

4. Program listings

B. All reports shall be either displayed or printed by:
   1. Operator request.
   2. Time of day.
   3. Event conditions (such as in response to an alarm, interlock, etc.).

C. All reports shall be time and date stamped.

D. An alarm-processing program shall be provided to annunciate those points designated as alarmable. Alarm points shall, upon alarm occurrence, be displayed or printed at designated terminals.

E. Historical trend data shall be collected and stored at each DDCP for later retrieval. Retrieval shall be manual or automatic. Any point, physical or calculated, may be designated for trending. The system shall allow for two methods of trend collection: Either by a pre-defined time interval sample or upon a pre-defined change of value. Trend data shall be presented in a columnar format. Each sample shall be timed stamped. Trend reports may be a single point or may be a group of points, up to a maximum of (8) points in any single group. Any point, regardless of physical location in the system may become part of a multiple point group.

F. Each BMCS network shall provide a point-monitoring function that can display single or multiple points in a continuous updated fashion for dynamic displays of point values.

G. A database and configuration report program shall be provided that allows the user to interrogate BMCS status. As a minimum, the user shall be able to: Verify available RAM at each DDCP, verify DDCP status (on-line, off-line, and failed) and set the system clock.

H. Any invalid operator entry shall result in an error message.

I. DDCP's shall contain a password access routine that will assign an operator to one of three level of access. Level 1 shall permit display function only, level 2 shall additionally permit commanding of system points and level 3 shall additionally permit full program and database editing.

J. DDCP's shall provide for the accumulation of totalized values for the purposes of run-time or energy totalization. Totalized values may be displayed or printed automatically or by operator request.

2.7 ENERGY MANAGEMENT SOFTWARE

A. The BMCS shall be provided with an optimal start program such that the building may be divided into ten zones for optimum start. Warm-up and cool-down shall occur in sequence with succeeding zones starting only after the preceding zone has completed its warm-up or cool-down.
   1. The optimum start-up time of assigned equipment shall be determined based on a software calculation that takes into consideration outdoor air conditions, space conditions, and building thermal characteristics ("U" factor).
   2. The optimum start program shall control start-up of the cooling and heating equipment to achieve the target occupancy space temperature at the precise time of building occupancy.
   3. A built-In "learning" technique shall cause the BMCS to automatically adjust itself to the most affective time to start equipment based on historical data.

B. The BMCS shall be provided with an operator interactive time of day (TOD) program. TOD programming and modifying shall be accomplished in a calendar-like format that prompts the user in English language to specify month, year, day and time and associated point commands. It shall

be possible to assign single points or groups of points to any on or off time. Appropriate time delays shall be provided to "stagger" on times.

1. TOD shall incorporate a holiday and special day schedule capability, which will automatically bring up a pre-defined holiday or special day schedule of operation. Holidays or special days can be scheduled up to one year in advance.
2. In addition to the time dependent two-state control, TOD also provides time dependent setpoint control. This control provides the capability to output assignable, proportional setpoint values in accordance with the time of day and day of week. This program shall be used to accomplish night setback, morning warm-up and normal daily operating setpoints of all control system loops controlled by the BMCS. As with the two-state control, time dependent setpoint control shall be subject to the holiday schedule. The setpoints desired shall be user definable at any operator terminal.
3. The operator shall be capable of reading and/or altering all sorted data pertaining to time of day, day of week, on/off times, setpoint values, and holiday designation.
4. The TOD program shall also provide an override function that allows the user to conveniently change a start or stop time for any point up to one week in advance. The override command shall be temporary. Once executed the TOD program shall revert to its original schedule.
5. The TOD program shall interface with the optimal start program (OSP) such that stop times may be assigned by OSP.

C. Additional Program functions required are to be installed and programmed as requested by end user at no additional cost:

1. Enthalpy optimization.
2. Supply air reset.
3. Hot water reset.
4. Chilled water reset.
5. Volumetric control.
6. Dead band control. Install dual set points as requested by user.
7. All specified energy management programs, whether or not applicable to this project shall be provided such that the owner may enable the program at a future date without the need to purchase additional software or modify existing software.

2.8 WEB SERVER ACCESSIBILITY

A. Industry leading encryption technology to provide accessibility through a web browser.

B. Building Manager’s ability to access, view and command critical building information in real time over the intranet or internet.

1. Alarm Display
2. Point Commanding
3. Graphic Display
4. Scheduling
5. Running Reports
6. Point Details

2.9 REMOTE NOTIFICATION

A. Remote notification sends Alarm and System Event information to various notification devices as indicated below but not limited to. Operators can receive their building automation system alarms without restricting them to dedicated workstations.

1. Alphanumeric pagers
2. Numeric pagers
3. Email
4. Phones via voice or short message service (SMS)

2.10 POINT EXPANSION MODULES

A. Capable of extending its input/output capabilities via special purpose modules.
   1. Modules may be mounted remote from the DDCP.
   2. Shall communicate with the DDCP over a pair of twisted cables.

2.11 TERMINAL EQUIPMENT CONTROLLERS

A. Provide for control of each piece of equipment, including, but not limited to, the following:
   1. Variable Air Volume (VAV) boxes
   2. Constant Air Volume (CAV) boxes
   3. Dual Duct Terminal Boxes
   4. Unit Conditioners
   5. Heat Pumps
   6. Unit Ventilators
   7. Room Pressurization
   8. Fan Coil Units

B. Include the following items:
   1. All input and outputs necessary to perform the specified control sequences.
      a. Analog outputs shall be industry standard signals such as 24V floating control.
   2. Sufficient memory to accommodate point database, operating programs, local alarming and local trending.
   3. All databases and programs shall be stored in non-volatile EEPROM, EPROM and PROM, or minimum of 100-hour battery backup shall be provided.
   4. Return to full normal operation without user intervention after a power outage of unlimited duration.
   5. Operation programs shall be field selectable for specific applications.
   6. Specific control strategy requirements, allowing for additional system flexibility.
   7. Controllers that require factory changes of all applications are not acceptable.

2.12 ELECTRONIC DAMPER ACTUATORS

A. Two position damper operators:
   1. Spring return to full travel position.
   2. Built in auxiliary switches (motor end switches)
      a. Switch shall be fully adjustable so that cut-in/cut-out points may be preset at any point within angular travel of the motor.
   3. Minimum torque 60-in-lb

B. Modulating damper operators:
   1. Sized with sufficient reserve power to provide smooth modulating action and tight close off against the system pressure
   2. Select the operator with available torque to exceed the maximum required operating torque by not less than 100%
   3. Minimum torque 100 in-lb

2.13 ETHERNET CARD

A. Ethernet Card:
   1. Local area network connection interface card.

2.14 CONTROL CABINETS

A. Fully enclosed NEMA 1 for indoors, NEMA 4 for outdoors.
   1. Powder coat painted on all sides
   2. Cabinet with continuously piano type hinged door
   3. Locking latch
   4. All locks shall use a common key
   5. Devices on the panel face must be identified with engraved nameplates.
   6. Panels or termination panels must be identified with engraved nameplates.
   7. Provide enamel beige finish and extruded aluminum alloy frame UL 50 certified.

2.15 AUTOMATIC CONTROL VALVES

A. Pressure ratings: Minimum 125 psig or 1.25 times maximum system operating pressure.

B. Construction:
   1. 2" and smaller:
      a. Screwed.
      b. Bodies and internal parts: Bronze, stainless steel or other approved corrosion-resistant metal.
   2. 2-1/2" and larger:
      a. Flanged.
      b. Bodies: Cast iron or cast steel.
      c. Seats and parts exposed to fluid: Bronze, stainless steel or other approved corrosion-resistant metal.
   3. Characterized port ball valves are acceptable for VAV terminal units only.

C. Modulating straight through water valves: Equal percentage contoured throttling plugs.

D. Three Way Mixing Valves: Linear throttling plugs allowing total flow through valve to remain constant regardless of position.

E. Sizes: By Automatic Control System Manufacturer for fully modulating operation.
   1. Minimum pressure drop: Equal to pressure drop of coil or exchanger.
   2. Maximum pressure drop: 5.5 psi.
   3. Relief and bypass valves: Sized according to pressure available.
   4. 2-position valves: Line size.
   5. Manual by-pass operator.

F. Electronic Actuator:
   1. Direct coupled installation
   2. Visual and electronic stroke indicator
   3. Die-cast aluminum housing
   4. Manual override
   5. Self-lubricating bearing and gear train
   6. Automatic calibration
   7. Automatic duty cycle protection
   8. Overload and stall protection
   9. Non-spring return
   10. Floating /0-10 VAC / 4-20mA operation
   11. UL approved
   12. Provide smooth modulating action and tight close off against the system pressure.
   13. Torque to exceed the maximum required operating torque by not less than 150%.
   14. Actuator input signal shall be compatible with output DDC controller.
   15. Provide weatherproof enclosure (exterior use).
   16. Damper actuators not acceptable for valves.

2.16 FLOW DETECTION SWITCHES

A. Remote Flow Solid-State Flow Detection:
   1. Extended length flow probe
   2. Cabinet-mounted control monitor
   3. Wetted parts, 316 stainless steel probe
   4. Optional temperature and wire-break outputs
   5. Flow and temperature switch points
   6. LED bar graph display for status indication

B. Approved Manufacturer:
   1. IFM Effector

2.17 DIFFERENTIAL PRESSURE SWITCHES

A. Wet/wet differential pressure switch
   1. Integral Mounting Frame
   2. Watertight, dust-tight, and corrosion resistant enclosure.
   3. Wetted materials of brass and flouroelastomer.
   4. Externally adjustable set point

B. Approved manufacturer:
   1. Square D #9012GGW4
   2. Dwyer #DXW-11-153-1
   3. Carrier #HK06ZC033

2.18 TEMPERATURE LOW LIMIT SWITCH

A. Responsive to the coldest 1' section of its length.
   1. Double pole single throw switch
   2. 20' capillary
   3. Line voltage with bellows actuated switch
   4. Auto reset for outdoor installation
   5. Manual reset for indoor installation

2.19 TEMPERATURE AND HUMIDITY SENSORS

A. Space Temperature Sensors
   1. Thermister with resistance of 10,000 ohms at 77°F.
   2. Accuracy shall be +/-1/2°F.
   3. Range of 55° to 95° F.
   4. Flush mounted
      a. Stainless steel flush mount sensor, submit sample for review.
   6. Location and height to be approved by Architect/Engineer prior to installation.

B. Space / Duct Humidity Sensor
   1. Capacitance element in the space or duct as required and output a 4 to 20 MA signal proportional to 0 to 100% RH to the DDC.
   2. Capacitance element shall be field replaceable and not require calibration.
   3. Accuracy shall be +/-2% in the range from 20 to 95% RH.
   4. Relative humidity sensors shall have the sensing element of inorganic resistance media.
   5. Provide impact resistant Polycarbonate equal to BAPI-Guard covers suitable for institutional use. Submit sample for review.
   6. Provide manufacturers calibration certificate.
   7. Provide impact resistant Polycarbonate equal to BAPI-Guard guards in the following

locations:
a. Corridors
b. Cafeteria
c. Kitchen.
d. Gymnasium.
e. Dressing Rooms.
f. Industrial Labs.

C. Duct Temperature Sensors
1. Range of 20° to 120°F.
2. Single point sensing of temperature.
3. Averaging elements of sufficient length to sense temperature across 2/3 duct width.
4. Averaging elements of sufficient length to provide accurate, representative indication and control.
5. Averaging elements of sufficient length to prevent variances in temperature or stratification.

D. Liquid Immersion Temperature Sensors
1. Platinum type resistance temperature detector (RTD).
2. Match sensor range to medium being monitored.
a. Hot water range 30° to 250°F.
b. Chilled Water 20° to 70°F.
3. Furnish stainless steel wells for installation by Mechanical Contractor.
4. Locate all sensors in field with Owner/Engineer present.
5. System accuracy for liquid temperature sensing shall be +/-1/2°.
6. Sensors must be removable from wells.

E. Outside Air / Freezer / Cooler Sensors
1. Range of –58° to 122°F.
2. Weatherproof sun shield.
3. External trim material corrosion resistant with all parts assembled into water tight, vibration-proof, heat resistant assembly.
4. Minimum of 8' long leads.
5. Encapsulated into Type 304 stainless steel tubes with low conductivity moisture proofing material and lag extension for thickness of insulation.

2.20 CURRENT SENSITIVE RELAYS

A. Ensure compatibility with VFD applications for variable speed motor status.
1. Provide with adjustable set point.
2. Relays must be mounted and not hung by power wires thru CT.
3. Provide split-core type current sensors.
4. Loop powered.
5. LED Status.
6. Acceptable Manufacturer: Veris Industries / Hawkeye
7. Relays shall close status contacts in response to current flow in power leads to the equipment being monitored.

2.21 DIFFERENTIAL PRESSURE TRANSDUCER

A. Transducers to convert differential pressures to 4-20 MA analog outputs.
1. Solid state pressure sensor with accuracy of +/- 1% of calibration range.
2. Factory calibrated and have zero and span trimmers for field calibration.
3. Range shall be selected to match the medium being monitored.
4. Pressure snubbers to protect from pressure pulses and a 3-way bypass / valve assembly to

protect the transducer from overpressure damage during start-up.
5. LCD Display
6. Acceptable Manufacturer: Rosemount 1151 or 3051 Pressure Transmitter

2.22 FLOW DIFFERENTIAL PRESSURE SWITCH

A. The pressure sensing element shall be of the convoluted diaphragm type for sensitivity to system differential pressure.
1. Select the pressure range based on the sensed differential pressure.
2. The unit shall be protected against overpressure to the full static pressure rating.
3. Accuracy: +/- 2% of full scale.

B. Switch assembly.
1. Reed switch.
2. NEMA-4 enclosure.
3. Threaded boss conduit entrance.
4. SPST action.
5. Voltage and rating as required for the control circuit.

C. Wetted parts shall be made of type 303 stainless steel.

D. Install an isolation valve in each sensing pipe leg to permit servicing without shutting the system down.

2.23 ELECTRIC REMOTE BULB THERMOSTAT

A. Two position remote bulb thermostat:
1. Bimetal controlled.
2. Sealed mercury switches.
3. Provide specified control action.
4. Adjustment can be made by removing unit cover.
5. Element with capillary length as required for the location.

2.24 ELECTRIC SPACE THERMOSTAT

A. Two position space thermostat.
1. Single Pole switch actuated by bi-metal sensing element.
2. Range shall be 60°F to 90°F.
3. Removable external knob adjustment means.

2.25 HIGH STATIC PRESSURE SWITCH

A. With manual reset switch
1. Approved manufacturer: Cleveland AFS-460.

2.26 INSERTION FLOW SENSORS

A. Turbine Flow Meter
1. Retractable hot tap flow sensor
2. Accuracy: +/- 1% of full scale
3. Dual Turbine
4. Custom thread-o-let 400 psi / 250°F rated
5. Line size from 2-1/2 to 72 inch
6. Metering range from 0.3 to 15 f/sec.
7. Remote NEMA 4 wall mounted LCD display

8. Field Pro Software & Communicator
9. Warranty two years
10. Approved Manufacturer: Onicon Flow Meter F1200 Series

B. Electromagnetic Flow Meter
1. Retractable hot tap flow sensor
2. Accuracy: +/- 1% of full scale
3. Electromagnetic
4. Custom thread-o-let 400 psi / 250 degree F rated.
5. Line size from 1-1/4 to 72 inch
6. Metering range from 0.3 to 15 f/sec.
7. Remote NEMA 4 wall mounted LCD display
8. Field Pro Software & Communicator
9. Warranty two years
10. Approved Manufacturer Onicon Flow Meter F3500

2.27 CONTROL DAMPERS

A. Opposed blade dampers.
1. Frames of 13-gauge galvanized sheet metal.
2. Provisions for duct mounting.
3. Damper blades not exceeding 8" in width.
4. Blades of two sheets of 16-gauge galvanized sheet metal.
5. Blades suitable for high velocity performance.
6. Bearings of nylon or oil-impregnated, sinthered bronze.
7. Shafts of 1/2" zinc-plated steel
8. Leakage does not exceed 1/2% based on 2000 fpm and 4" static pressure.
9. Replaceable resilient seals along top, bottom and sides of frame and blade edge.
10. Submit leakage and flow characteristics data with shop drawings.
11. Linkage shall be concealed out of the air stream within damper frame.
12. Acceptable Model is Ruskin Model CD60.

2.28 PHOTO CELL CONTROL

A. Light Sensitive Resistor.
1. 4-20 output or switch.
2. On = 3.0 / fc. Off 10.0 / fc.
3. UL Approved.

2.29 DRAIN PAN FLOAT SWITCH

A. Rated at 10 Amps.
1. Shuts off equipment if water level becomes too high.
2. DPDT Contacts.

2.30 BY-PASS AUTOMATIC SHUT-OFF TIMERS

A. Rated at 10 Amps, 125 VAC
1. Shuts off equipment with timed switch
2. White decorated timer
3. Without hold feature
4. Time Cycle 60 minutes

PART 3 - EXECUTION

3.1 INSTALLATION

A. The control system shall be installed and final adjustments made by full-time employees of the factory-approved BMCS Building Management Control Subcontractor.

B. The contractor shall collaborate through Architect / Engineer and Owner to determine the Owner's preference for naming conventions, etc. before entering the data in to the system.

C. Due to actual operational or space conditions, it may be necessary for the Contractor to make sequence of operation modifications and/or controller adjustments, change the location or type of sensor to obtain proper operation and coverage of the system in each room or space. These change, if requested by the Owner or Engineer, shall be performed at no additional cost to the Owner. Therefore labor allowances should be made for such changes and adjustments if requested.

D. Points listed within this section are to be connected to the BMCS system as hard-wired points to cards and not connected through BacNet integration. The BacNet interface is for read only points not included within sequences of this specification.

3.2 INTERLOCK AND SAFETY CIRCUITS

A. Close the outdoor air dampers when the related HVAC unit supply or exhaust fan is de-energized:
   1. The damper and actuators are specified in this section.
   2. Outdoor air damper shall be fully opened before related air handling unit fan is energized for 100% outside air use.
   3. Provide motorized outside air dampers for the following:
      a. Supply fans
      b. AHUs
      c. Exhaust fans (except kitchen exhaust)

B. Close the chilled and hot water valves to the coil when the related unit is de-energized.

C. Interlock each chiller to start its dedicated chilled and condenser water pumps.
   1. On shutdown provide a circuit to permit the chilled water pumps and condenser water pumps to run while the chillers pump down as required by the manufacturer.
   2. As per manufacturer’s recommendations

D. Primary chilled water control:
   1. Operating and safety controls are furnished as an integral part of the water-chilling unit and not specified in this section.
   2. Provide a high limit temperature sensor in each primary chilled water pump loop.

E. Exhaust/Supply Fans:
   1. Interlock the related exhaust and supply fans and the related outside air damper.
   2. Interlock the exhaust fans with the related air-handling unit through software.
   3. Interlock related exhaust fan for dishwasher with time delay off relay.
   4. Interlock related exhaust fan for kiln with time delay off relay
   5. Interlock kitchen hood related supply and exhaust fans.
   6. Provide additional interlocks as indicated on fan schedule and on drawings.
   7. Interlock electrical and mechanical room exhaust fans with thermostat.
   8. Interlock refrigerant monitor with mechanical room purge system.
   9. Interlock science room related supply and exhaust fans.
   10. Interlock outside air supply fans for VAV air-handling unit with air-handling unit status point.

F. Freeze Protection:

1. Provide a freeze protection sequence to ensure proper operation of equipment during a freeze condition not limited to the following:
    a. Outside Air Handling Units & Supply Fans with heating and cooling coils: If unit is in occupied or unoccupied mode, upon the triggering of software point indicating a freeze condition or the low temperature sensor (freeze stat) indicates a freeze condition, the system will be disabled, close the outside air damper, open both heating and cooling valves to enable full flow condition. If heating coil discharge air sensor indicates a failure to control and is below setpoint then enable software point indicating a freeze condition, disable unit, close outside air damper, and open both heating and cooling valves to enable full flow condition. Ensure HW & CHW pumps are operational.
    b. Boilers - Enable during a freeze condition.
    c. Chillers – Open isolation valves then command by-pass valve to dump water into basin or by-pass tower. Enable condenser water pumps during a freeze condition.
    d. Air Cooled Chillers – Open isolation valves, then enable pumps, run cycle for 15 minutes per hour, open all chilled water valves.
    e. Protect coils downstream of DX cooling coil with freeze protection. If unit is in occupied or unoccupied mode, upon the triggering of software point indicating a freeze condition or the low temperature sensor (freeze stat) indicates a freeze condition, the system will be disabled, close the outside air damper, disable the DX cooling coil. If coil discharge air sensor indicates a failure to control and is below setpoint then enable software point indicating a freeze condition.
2. Temperature low limit switch wired with double pole single throw switch with one switch leg hard-wired to de-energize fan and one switch leg to signal BMCS.

G. Drain Pan Float Protection:
1. Interlock to shut down unit and close valves.
2. Cooling Coils mounted above ceiling and in roof mounted units.
3. Provide for each cooling coil location.
4. Signal BMCS alarm point

H. Copper Tube Boiler:
1. Interlock each boiler to start its dedicated primary circulating pump. Interlock flow switch and pump to boiler safety terminal strip.
2. On startup enable boiler and primary pump prior to starting secondary system pump until primary loop temperature reaches 105 degrees as per manufacturer’s recommendations.
3. Disable secondary pump if boiler goes into alarm or fails to produce heating water within 30 minutes.

3.3 GRAPHICS

A. Furnish as-built drawings indicating finally corrected "as installed" diagram(s) of the complete Building Management Control System.
1. Modification of existing control systems shall be included.
2. These must be as-built and any changes during the warranty period drawings must be revised and updated.
3. Provide final sequence of operation in written format.

B. Provide a set of the "as installed" diagram(s) of the complete control system laminated in plastic and hung in the main mechanical room or as directed by Owner.

C. Provide a color-coded floor plan of the building showing the location of each system, and the area served by each AHU or related zone. These must be of professional quality. Floor plan is to hang in main mechanical room near central control panel.

D. Provide computer graphics for each system.

E. Provide final graphic room numbers as selected by Owner / Architect.. Obtain a graphic submittal package for review. Construction Drawing room numbers are not to be used unless approved in writing.

3.4 IDENTIFICATION

A. Provide a laminated engraved nameplate on all control panels and devices shown on the "as installed" control diagrams. Coordinate engraving with nomenclature used on the diagrams.

B. A black-white-black laminated plastic engraved identifying nameplate shall be secured to each terminal cabinet, and control panels. Identifying nameplates shall have ½ inch high, engraved letters.

3.5 WIRING FOR BUILDING MANAGEMENT AND CONTROL SYSTEMS

A. Furnish and install all wire, conduit, raceways and cable systems required for the complete operation of the Building Management and Control System.

B. All wiring for the Building Management and Control System is specified in this section and includes, but is not limited to:
1. Wiring of interlock system.
2. Wiring of control instruments.
3. Wiring of control panels.
4. Wiring of related power supplies, i.e. transformers.
5. Wiring of 120 VAC power circuits for control panels and devices.

C. All materials and methods specified in this section shall comply with the requirements specified in Division 26 of this specification.

D. All power supply requirements shall be connected to the building electrical distribution system in an approved manner. Do not connect control equipment of circuits common with other building loads or devices.

E. Temperature control wiring shall be jacketed cables installed with or without conduit as specified below or single conductors installed in conduit. Control wiring shall have minimum 300V insulation for low voltage wiring and 600V insulation for line voltage wiring.

F. All line voltage control wiring, all low voltage control wiring which is exposed in the central plant, penthouse, and other similar spaces; all low voltage control wiring which is routed through concealed inaccessible locations shall be installed in conduit.

G. All low voltage control wiring which is routed through concealed accessible locations may be run without conduit provided that the wiring run without conduit is properly supported from the building structure on maximum 5' centers and does not depend upon the ceiling grid or the ceiling support system for support. Wiring run in plenum spaces shall be plenum rated. Support all plenum wiring in accessible locations in bridle rings, J-hooks, D rings. Plenum wiring is not to be supported within building structure or attached to conduit raceways. All low voltage wiring must be installed through supports. Wires shall be supported on 5’ centers and identified at each termination point and at 50’ centers minimum. Install wire parallel or perpendicular to the structural features of the building.

H. Line and low voltage control wiring shall not be installed in the same conduit with control wiring and shall not be installed in the same conduit with power wiring.

I. All wiring associated with building management and control system cover shall be as follows:
   1. Sensor jacket color, Green
   2. LAN communications, Yellow
   3. All THHN wiring shall comply with Division 26 insulation color identification

3.6 CHILLER REPLACEMENT SEQUENCES OF OPERATION

A. All existing chilled water system sequences of operations shall be maintained.

B. Modify and extend all conduit and wiring as required for chiller replacement.

C. All existing controls sensors shall be removed and reinstalled. Where sensors are found to be faulty, notify the engineer to receive instructions on how to proceed.

D. Each chiller is provided with a BacNet interface card. Provide a graphics page to display all available information.

3.7 PUMP REPLACEMENT SEQUENCE OF OPERATION

A. All existing chilled water system sequences of operations shall be maintained.

B. Modify and extend all conduit and wiring as required for chiller replacement.

C. All existing controls sensors shall be removed and reinstalled. Where sensors are found to be faulty, notify the engineer to receive instructions on how to proceed.

D. Pump VFD shall only be used for balancing and soft start.

E. The following points are to be provided if they are not currently provided.

POINT DESCRIPTION	TYPE	DEVICE
Pump Status	DI	Current Sensitive Relay
Pump Start/Stop	D0	Control Relay
Pump VFD	AO	Motor Controller

3.8 START-UP AND POINT VERIFICATION

A. Final startup and point verification shall include the following information.
   1. Field panel checkout:
      a. Verify enclosure is not mounted on vibrating surface.
      b. Verify class I and class II wiring is separated within enclosure.
      c. Check for shorts/grounds/induced voltages/proper voltages.
      d. Verify proper point terminations in accordance with as-builts.
      e. Verify that all modules are in proper place and addressed.
      f. Verify proper power voltage.
      g. Load database and programming.
      h. Startup the panel.
      i. Point and device checkout.
   2. Analog input point checkout:
      a. Verify the correct wiring terminations per the design documentation package, at

the field panel. Verify that all wiring and terminations are neat and dressed.

b. Verify the point address by checking that the analog input instrument is wired to the correct piece of field equipment. Do this by altering the environment at the sensing element or by disconnecting one of the wires at the sensor, and verifying that the reading at the field panel has reacted to this change.

c. Verify the point database to be correct, (i.e., alarmability, alarm limits, slope/intercept, engineering units, etc.). Verify that the correct change of value (COV) limit has been defined.

d. Verify the sensor has the correct range and input signal. (i.e., 20-120°F, 4 - 20 ma). Verify that the device is mounted in the correct location and is wired and installed correctly per the design documentation package.

e. Set-up and/or calibrate any associated equipment (i.e., panel LCD meters, loop isolators, etc.). Verify that these auxiliary devices are mounted in the correct location and are wired and installed correctly per the design documentation package.

f. Verify the correct reading at the field panel using appropriate MMI devices. Verify that any associated LCD panel meters indicate the correct measured value.

3. Digital input point checkout:

a. Verify the device is correctly wired and terminated as shown in the design documentation package. Verify that all wiring and terminations are neat and properly secured.

b. Verify the point address by verifying that the digital input is correctly terminated at the controlled piece of equipment.

c. Verify the point database is correct (i.e., point name, address, alarmability, etc.).

d. Set-up and/or calibrate the associated equipment, i.e. smoke detector, high/low temp detector, high/low static switch, end switch, current relay, pressure switch, etc. is mounted in the correct location, and is wired and installed correctly per the control system installation drawings.

e. With the controlled equipment running or energized as described in the digital output checkout procedures, verify the correct operation of the digital input point and associated equipment by putting the digital input monitored equipment into its two states. Verify that the proof or status point indicates the correct value at the operator's terminal and that the status led is giving the proper indication in each mode of operation (on/off).

4. Digital output point checkout:

a. Verify that device is correctly wired and terminated as shown in the design documentation package.

b. Verify that the correct voltage is utilized in the circuit.

c. Verify the point database to be correct (i.e. point name, address, etc.).

d. Check and verify that the end device responds appropriately to the digital output(s).

e. After verifying the set-up and operation of any associated digital input/proof points, check and verify correct operation of the logical point and associated equipment by commanding the point to all possible states (i.e. off, on, fast, slow, auto, etc.). Verify that the defined proof delay is adequate for all modes of operation.

f. If any interlocked equipment exists that has independent hand-off-auto or auxiliary control wiring, verify correct operation of same. Also check that any interlocked equipment such as EP switches for damper operation or exhaust and return fans are wired correctly and operate correctly.

g. Verify that the controlled piece or pieces of equipment cannot be caused to change state via the digital output if an associated hand-off-auto switch is in the hand/on or hand/off mode of operation, unless specified as a fireman's override point etc.

5. Analog output point checkout:
    a. Verify the correct wiring or piping terminations per the design documentation package, at the field panel. Verify that all wiring and piping terminations are neat and dressed.
    b. Insure that the correct output device(s) are installed per the Control System Installation Drawings. (i.e., I/P or P/I transducers, transformers, power supply, etc.). Verify that these devices are installed, wired and piped correctly. Verify that any configuration jumpers are in the proper settings for the required application. Verify related transformers are fused in accordance with installation drawings.
    c. Verify the point database to be correct. Verify that the correct COV limit has been defined.
    d. Verify the point address by checking that the analog output is wired and/or piped to the correct output transducer and/or equipment.
    e. Verify that the controlled device is calibrated (i.e., 3-8PSI valve, 8-13 PSI damper motor, 4-20 ma variable frequency drive, etc.) and is in the correct location, and is wired or piped and installed correctly per the design documentation package. If the controlled device is not calibrated, then a three-point (high, low and mid-point) calibration procedure must take place. Verify proper operation of the end device. When calibration has been verified, ensure that installation drawings, point database, and PPCL have been updated.
    f. Set-up and or calibrate any associated equipment, (i.e., panel LCD meters, loop isolators, pneumatic gauges, etc.). Also verify that these auxiliary devices are mounted in the correct location, and are wired or piped and installed correctly per the design documentation package.
    g. After verifying the set-up and operation of any associated equipment check for the correct operation of the logical point and associated equipment by commanding the analog output to the top and bottom of its range. Verify that the control device(s) responded appropriately as indicated by the design documentation package. Check to insure that all network terminals, host console devices, etc. can also command these outputs.
    h. Check that all pneumatic gauges, pilot positioners and LCD panel meters indicate the correct values.
6. Terminal equipment controller checkout:
    a. Load program database
    b. Enable programs
    c. Verify sequence of operations
7. Programming checkout:
    a. Provide checkout for each system and sequence of operation.
    b. The following are sample sequence of operations tests. The intent of these procedures is to provide a plan of action to verify system operations via block checks of the project specific sequence of operations. The procedures may be used in this format, or one procedure to a page should more detail be required. The procedures outlined below should be verified for accuracy, and may be modified to meet your specific requirements.
    c. Description of Test: AHU Alarm Checkout. Verify AHU-1 discharge air temperature alarming is operational and is received at the designated terminal.
    d. Input to Trigger Test: Change discharge temperature high alarm limit through software to a value below the current discharge temperature (discharge temperature - 10°F).
    e. Expected Outcome: A high temperature alarm will be received per the Alarm Definition Report at its designated terminal.
    f. Provide signoff sheet with indication for test Pass, Fail, Date of test and Initials for signoff.
8. Workstation checkout:

a. Verify the operation of all trunk interface equipment.
b. Verify all workstation software, including options, based upon the installation instructions for the PC.
c. Perform software backup (site, options, etc.)
d. Complete workstation configuration report for owner signoff.
e. Provide verification that all graphics have been created, as required by project bid documents.

3.9 TESTING AND ACCEPTANCE

A. General:
1. After completion of installation and start-up procedures, commence the specified 3-phase verification and testing sequence leading to final acceptance.
a. Follow in the order specified.
b. Each testing phase shall be satisfactorily completed before entering the next phase.
2. Prior to entering each phase of the sequence, submit for approval, a written agenda describing in detail the procedure to be followed to meet the requirements for each specified verification, test or demonstration.
3. Submit for approval, a sample of the form on which the test will be reported.
a. Identify project.
b. Provide a list of all points, arrange in numerical order of point addresses.
1) Show point descriptor and location of each.
2) Indicate DDC panel that processes each point.
3) Use the list as a basis for the specified report form.
c. Signatures of participants and observers.
d. Results.
e. Description of adjustment or corrections of points in error.
f. Date.
4. Provide schedule of tests. Estimate dates of significant events.
5. Test, calibrate and adjust each point in the system as specified.
6. Provide documentation of all tests and verifications as specified.
7. Provide trend reports indicating proper control of all points for an extended period of time.

B. Phase 1 - Testing, Calibrating, and Adjusting:
1. Operate each analog point in the entire system.
a. At a point in the upper quarter of its range.
b. At a point in the lower quarter of its range.
c. At its operating point.
2. Provide personnel and diagnostic instruments at both the central and remote locations.
3. Provide testing stimulants for alarms.
4. Use digital meters of double the accuracy of the instruments being calibrated.
5. Provide an approved test device for simulating high and low temperatures.
6. When the function is performed, read values at the central control and observe the actual function at the field instrument.
7. Exercise each binary point and observe indication at console and simultaneously observe operation in the field.
8. Submit an operation report for each point in the system, in approved format, and describe any corrective or adjusting action taken.
9. Test all power transducers with a Dranetz Power Analyzer.

C. Phase 2 - Equipment and Point Verification:
1. Verify calibration or function of each point.
a. Verify analog points at operating value.

b. Record on specified form.
c. Make approved adjustments to out of tolerance points.
1) Identify these points for ready reference.

2. After verification procedure in completed:
a. Verify corrected points.
b. Record on specified form.
c. Points requiring correction.
1) Replace sensor or actuator if electrical measurements indicated components are out of specified tolerance.

D. Phase 3 - Software Verification:
1. Submit agenda and report format for software demonstrations.
2. Demonstrate to the Owner and the Engineer that all software programs and automatic control sequences function as specified.
3. Demonstrate compliance with response time specifications.
a. Simulate normal heavy load conditions.
b. Initiate at least ten successive occurrences on normal heavy load conditions as specified, and measure response time of typical alarms and status changes.
04. Provide written documentation of demonstration, signed by representatives of the Contractor and Engineer.

E. Provide the following reports to Engineer at final completion of all Testing:
1. List of all points.
2. List of all points currently in alarm.
3. List of all disabled points.
4. List of all points in over-ride status.
5. List of all points currently locked out.
6. List of user accounts and access levels.
7. List all weekly schedules.
8. List of holiday programming schedules.
9. List of limits and deadbands.
10. System diagnostics reports including, list of DDC panels on line and communicating, status of all DDC terminal units device points.
11. List of programs.
12. Provide trend data reports to ensure proper operation and sequence control of BMCS.

F. Substantial Completion of the BMCS will not occur until completion and acceptance of all testing and acceptance procedures.

3.10 TRAINING

A. The contractor shall provide factory-trained instructor to give full instruction to designated personnel in the operation of the system installed. Instructors shall be thoroughly familiar with all aspects of the subject matter they are to teach. The contractor shall provide all students with a student binder containing product specific training modules for the system installed. All training shall be held during normal working hours of 8:00 am to 4:30 PM weekdays.

B. Provide 40 hours of training for Owner's designated operating personnel. Training shall include:

Explanation of drawings, operations and maintenance manuals
Walk-through of the job to locate control components
Operator workstation and peripherals
DDC controller and ASC operation/function
Operator control functions including graphic generation and field panel programming
Operation of portable operator's terminal

Explanation of adjustment, calibration and replacement procedures
Student binder with training modules

C. Since the Owner may require personnel to have more comprehensive understanding of the hardware and software, additional training must be available from the Contractor.

3.11 PROJECT MANAGEMENT

A. Provide a designated project manager who will be responsible for the following:
   1. Construct and maintain project schedule.
   2. Authorized to accept and execute orders or instructions from General Contractor, Owner / Architect & Engineer.
   3. Attend project meetings as necessary to avoid conflict and delays.
   4. Make necessary field decisions relating to this section.
   5. Coordination / Single point contact.
   6. Have Internet access for project management.

END OF SECTION

SECTION 23 20 00

HVAC PIPE AND PIPE FITTINGS - GENERAL

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Furnish and install pipe and pipe fittings for piping systems specified in Division 23 - Mechanical.

1.2 RELATED WORK

A. Division 23 Mechanical:
   1. Earthwork.
   2. Valves, Strainers and Vents.
   3. Vibration Isolation.
   4. Insulation.
   5. Other Piping Sections

PART 2 - PRODUCTS

2.1 PIPE AND FITTINGS

A. The particular type of pipe and fittings for each system is specified in the individual sections.

2.2 JOINTS

A. Make screwed joints using machine cut USASI taper pipe threads. Apply a suitable joint compound to the male threads only. Ream the pipe to full inside diameter after cutting. All-thread nipples are not permitted.

B. Dissimilar Metals. Make joints between copper and steel pipe and equipment using insulating unions or couplings such as Crane Company #1259; EPCO as manufactured by EPCO Sales, Inc.; or an approved equal.

C. Solder joints.
   1. Prior to making joints, cut pipe square and ream to full inside diameter. Clean exterior of pipe and socket. Apply a thin coat of suitable fluxing compound to both pipe and socket, and fit parts together immediately.
   2. Heat assembled joint only as required to cause the solder to flow. Run the joint full, slightly beaded on the outside, and wipe to remove excess solder.
   3. Use silver brazing alloy or Sil-Fos on refrigerant piping and on underground piping. Use lead free solder on all other copper piping.

D. Make welded joints as recommended by the standards of the American Welding Society. Ensure complete penetration of deposited metal with base metal. Provide filler metal suitable for use with base metal. Keep inside of fittings free from globules of weld metal. The use of mitered joints is not approved.

E. Flanged.
   1. Prior to installation of bolts, center and align flanged joints to prevent mechanical pre-stressing of flanges, pipe or equipment. Align bolt holes to straddle the vertical, horizontal or north-south centerline. Do not exceed 3/64" per foot inclination of the flange face from true alignment.
   2. Use flat-face companion flanges only with flat-faced fittings, valves or equipment.

Otherwise, use raised-face flanges.

3. Install gaskets suitable for the intended service and factory cut to proper dimensions. Secure with manufacturers recommended gasket cement.
4. Use ANSI nuts and bolts, galvanized or black to match flange material. Use ANSI 316 stainless steel nuts and bolts underground. Tighten bolts progressively to prevent unbalanced stress. Draw bolts tight to ensure proper seating of gaskets.
5. Use carbon steel flanges conforming to ANSI B16.5 with pipe materials conforming to ASTM A 105 Grade II or ASTM A 108, Grade II, ASTM A 53, Grade B. Use slip-on type flanges on pipe only. Use welding neck type flanges on all fittings. Weld slip-on flanges inside and outside.
6. Keep flange covers on equipment while fabricating piping. Remove when ready to install in system.

F. Mechanical Joints: Provide a stuffing box type mechanical joint adapted to use gasket, cast iron gland and bolts. Coat bolts with bitumastic enamel. Use joint parts similar in design to one of the following:

1. Doublex Simplex Joint manufactured by the American Cast Iron Pipe Company, Birmingham, Alabama.
2. U.S. joints manufactured by the United States Pipe and Foundry Company, Burlington, New Jersey.
3. Boltite Joint manufactured by the McWane Cast Iron Pipe Company, Birmingham, Alabama.
4. Flexlamp manufactured by the National Cast Iron Pipe Company, Birmingham, Alabama.

2.3 UNIONS

A. Use 150 lb. standard (300 lb. WOG) malleable iron, ground joint unions with bronze seat. Provide flanged joints on piping 2-1/2" and larger.

1. Where pipe material of different types join, use a dielectric union. Union shall be threaded, solder or as required for its intended use.

2.4 BRANCH CONNECTIONS

A. Pipe 2" and Smaller: For threaded piping, use straight size reducing tee. When branch is smaller than header, a nipple and reducing coupling or swagged nipple may be used.

B. 2-1/2" through 36": For welding piping, when branch size is the same as header size, use welding tee. For threaded branch connections, use 3000 lb. full coupling or Thread-o-let welded to header.

2.5 GASKETS

A. High Temperature Piping: Provide 1/16" thick ring gaskets of aramid reinforced SBR such as Garlock #3200 or 3400 or equal by Advanced Products and Systems.

B. Other Piping: Provide ring rubber gaskets, Garlock #7992 or equal by Advanced Products and Systems. Use 1/8" thick cloth reinforced neoprene gaskets. For smaller than 6", use 1/16" thick gasket.

2.6 FLOORS AND CEILING PLATES

A. Provide chrome-plated floor and ceiling plates around pipes exposed to view when passing through walls, floors, partitions, or ceilings in finished areas; size plates to fit pipe or insulation and lock in place.

2.7 DOMESTIC MANUFACTURE

A. All piping material, pipe and pipe fittings shall be manufactured in the United States of America.

PART 3 - EXECUTION

3.1 PIPE FABRICATION AND INSTALLATION

A. Make piping layout and installation in the most advantageous manner possible with respect to headroom, valve access, opening and equipment clearance, and clearance for other work. Give particular attention to piping in the vicinity of equipment. Preserve the required minimum access clearances to various equipment parts, as recommended by the equipment manufactured, for maintenance.

B. Cut all pipes to measurement determined at the site. After cutting pipe, remove burrs by reaming. Bevel plain ends of ferrous pipe.

C. Install piping neatly, free from unnecessary traps and pockets. Work into place without springing or forcing. Use fittings to make changes in direction. Field bending and mitering is prohibited. Make connections to equipment using flanged joints, unions or couplings. Make reducing connections with reducing fittings only.

D. Install piping without tapping out of the bottom of pipe.

3.2 WELD

A. Weld and fabricate piping in accordance with ANSI Standard B31.1, latest edition, Code for Pressure Piping.

B. Align piping and equipment so that no part is offset more than 1/16". Set fittings and joints square and true, and preserve alignment during welding operation. Use of alignment rods inside pipe is prohibited.

C. Do not permit any weld to project within the pipe so as to restrict flows. Tack welds, if used, must be of the same material and made by the same procedure as the completed weld. Otherwise, remove tack welds during welding operation.

D. Do not split, bend, flatten or otherwise damage piping before, during or after installation.

E. Remove dirt, scale and other foreign matter from inside piping before tying into existing piping sections, fittings, valves or equipment.

F. Bevel ends of ferrous pipe.

3.3 OFFSETS AND FITTINGS

A. Due to the small scale of drawings, the indication of offsets and fittings is not possible. Investigate the structural and finish conditions affecting the work and take steps required to meet these conditions.

B. Install pipe close to walls, ceilings and columns so pipe will occupy minimum space. Provide proper spacing for insulation coverings, removal of pipe, special clearances, and offsets and fittings.

3.4 SECURING AND SUPPORTING

A. Support piping to maintain line and grade, with provision for expansion and contraction. Use approved clevis-type or trapeze-type hangers connected to structural members of the building. Single pipe runs to be supported by approved clevis type hangers. Multiple pipe runs to be supported by approved trapeze type hangers. Do not support piping from other piping or structural joist bridging. Review structural drawings for additional information.

B. Provide supports both sides and within 12” of each horizontal elbow for pipe 6" and larger.

C. Support vertical risers with steel strap pipe clamps of approved design and size, supported at each floor. Support piping assemblies in chases so they are rigid and self-supported before the chase is closed. Provide structural support for piping penetrating chase walls to fixtures. On chilled water pipe supports shall be outside the insulation.

D. Where insulation occurs, design hangers to protect insulation from damage. Pipe saddles and insulation shields, where required, are specified in the appropriate insulation section and are sized in accordance with the schedule on the drawings.

E. Install trapeze hangers, properly sized, to support the intended load without distortion. Use hangers with 1-1/2” minimum vertical adjustment.

F. Use electro-galvanized or zinc plated beam clamps if acceptable to the structural engineer, threaded rods, nuts, washers and hangers. All hanger rods shall be trimmed neatly so that no more than 1 inch of excess hanger rod protrudes beyond the hanger nut. Use only on beams as directed by the Structural Engineer.

G. At outdoor locations, all supports, brackets and structural members shall be hot-dipped galvanized.

H. Provide hangers within 3' of pipe length from all coil connections.

I. Support spacing: As recommended by the project structural engineer and support manufacturer, but not more than listed below. Not to exceed spacing requirements of smallest pipe.

Pipe Size	Copper & Steel Max. Support Spacing, Ft.	Cast Iron Max. Support Spacing, Ft.	Minimum Rod Diameter, Inches
1" & smaller	6	5	3/8
1-1/4" & 1-1/2"	8	5	3/8
2"	10	5	3/8
3"	10	5	1/2
4" & 5"	10	5	5/8
6" and above	10	5	3/4

3.5 PIPE SUPPORTS

A. Provide P1001 or P 5000 Unistrut metal framing members and appurtenances for pipe support. Hot-dip galvanized members and appurtenances when located outside. Sagging of pipes or supports is not acceptable.

B. Adjustable clevis hangers shall be used for single pipe supports; Anvil Fig. 260. When oversized clevis is used, a nipple shall be placed over the clevis bolt as a spacer to assure that the lower U-strap will not move in on the bolt. Provide adjustable clevis with a nut / washer above and below the hanger on the support rod. Ring type clevis hangers are not acceptable.

C. Provide Anvil Figure 45 galvanized or primed and painted channel assembly for trapeze hangers.

3.6 PIPE SUPPORTS ON ROOF

A. Support condensate drain pipe on roof with Portable Pipe Hanger Model PP-10 with roller and fully adjustable height throughout pipe run. Base material shall be high density / high impact polypropylene with UV inhibitors and anti-oxidants. Provide with hot dip galvanized rod finish and framing. Nuts and washers shall be hot dip galvanized.

3.7 ANCHORS

A. Provide anchors as required. Use pipe anchors consisting of heavy steel collars with lugs and bolts for clamping to pipe and attaching anchor braces. Install anchor braces in the most effective manner to secure desired results. Do not install supports, anchors or similar devices where they will damage construction during installation or because of the weight or the expansion of the pipe. When possible, install sleeves in structural concrete prior to pouring of concrete.

3.8 FLOOR PENETRATIONS

A. At locations where pipe passes through floors, provide watertight concrete curb around penetration.

3.9 PIPE SLEEVES

A. Sleeves through masonry and concrete construction:
   1. Fabricate sleeves of Schedule 40 galvanized steel pipe.
   2. Size sleeve large enough to allow for movement due to expansion and to provide continuous insulation.

B. Sleeves through gypsum wall construction.
   1. Fabricate sleeves of 16 gauge galvanized sheet metal.

C. Sleeves through elevated slab construction.
   1. Fabricate sleeves of Schedule 40 galvanized steel pipe with welded center flange in floor.

D. Extend each sleeve through the floor or wall. Cut the sleeve flush with each wall surface. Sleeves through floors shall extend 2” above floor lines for waterproofing purposes. Slab on grade floors shall not be sleeved except where penetrating waterproofing membrane or insect control is required.

E. Caulk sleeves water and air tight. Seal annular space between pipes and sleeves with mastic compound to make the space water and air tight.

F. For sleeves below grades in outside walls, provide Thunderline Link-Seal or Advance Product and System Interlynx, with 316 stainless steel nuts and bolts, with cast iron pressure plate.

G. Provide chrome plated escutcheon plates on pipes passing through walls, floors or ceilings exposed to view. At exterior walls, stainless steel sheet metal is to be used.

H. For sleeves through fire and smoke rated walls, seal with a UL through-penetration firestop, rated to maintain the integrity of the time rated construction. Install in accordance with the manufacturer's installation instructions. Comply with UL and NFPA standards for the installation of firestops. Refer to Architectural drawings for all fire and smoke rated partitions, walls, floors, etc.

3.10 ISOLATION VALVES

A. Provide piping systems with line size shutoff valves located at the risers, at main branch connections to mains for equipment, to isolate central plant, and at other locations.

3.11 DRAIN VALVES

A. Install drain valves at low points of water piping systems so that these systems can be entirely drained. Install a line size drain valve for pipes smaller than 2" unless indicated otherwise. For pipes 2-1/2" and larger, provide 2" drain valves unless indicated otherwise. Drain valves shall be plugged when not in use and at completion.

3.12 CLEANING OF PIPING SYSTEMS

A. General cleaning of piping systems. Purge pipe of construction debris and contamination before placing the systems in service. Provide and install temporary connections as required to clean, purge and circulate. Flush the chilled and hot water systems utilizing the filter feeders.

B. Install temporary strainers at the inlet of pumps and other equipment as necessary where permanent strainers are not indicated. Keep strainers in service until the equipment has been tested, then remove either entire strainer or straining element only. Fit strainers with a line size blow down ball valve and pipe to nearest drain. Blow down strainers, remove and clean as frequently as necessary.

C. Phase One: Initial flushing of system. Remove loose dirt, mill scale, weld beads, rust and other deleterious substances without damage to system components. Open valves, drains, vents and strainers at all system levels during flushing procedures. Flush until “potable water clear” and particles larger than 5 microns are removed.

D. Connect dead-end supply and return headers, even if not shown on the drawings, and provide terminal drains in bottom of pipe end caps or blind flanges.

E. Dispose of water in approved manner.

F. Phase Two: Cleaning of Piping Systems. Remove, without chemical or mechanical damage to any system component, adherent dirt (organic soil), oil, grease, (hydrocarbons), welding and soldering flux, mill varnish, piping compounds, rust (iron oxide) and other deleterious substances not removed by initial flushing. Chemical shall be equal to Nalco 2578 prepping compound. Insert anti-foam compound as necessary. Circulate for 48 hours or as recommended by the manufacture. Dispose of water in approved manner. Flush system and replace with clean water. Verify compatibility of chemicals used with existing chemical treatment program on remodel projects.

G. Phase Three: Final flushing and rinsing: Flush and rinse until “potable water clear” and particles larger than 5 microns are removed. Operate valves to dislodge any debris in valve body. Dispose of water in approved manner.

H. Submit status reports upon completion of each phase of work on each system.

I. Special requirements, if any, are specified in the sections on each type of piping or in the section on Water Treatment Systems.

3.13 TESTING

A. Test piping after installation with water hydrostatic pressure of 1-1/2 times operating pressure (150 psig minimum) and carefully check for leaks. Repair leaks and retest system until proven watertight.

B. Do not insulate or conceal piping systems until tests are satisfactorily complete.

C. If any leaks or other defects are observed, suspend the test and correct the condition at once. Repeat testing until leaks are eliminated and the full test period is achieved.

D. The satisfactory completion of testing does not relieve the Contractor of responsibility for ultimate proper and satisfactory operation of piping systems and their accessories.

3.14 PIPE MARKERS

A. Identify interior exposed piping and piping in accessible chases or plenums with Opti-Code Brady Pressure Sensitive Adhesive Pipe Markers, consisting of pipe marker and direction of flow arrow tape. Clean pipe prior to installation. Background colors of markers, arrows and tape for each type of system shall be the same. Meet ANSI/OSHA standards and clearly identify each system. Provide minimum 2-1/4-inch letters through 4-inch pipe and 4-inch letters for 5-inch pipe and larger.

B. Identify exterior and mechanical room piping with Snap Around pipe markers through 4-inch pipe and Strap Around markers 5-inch pipe and larger. Pipe markers consisting of pipe marker and direction of flow arrow tape; background colors of markers, arrows and type for each type of system shall be the same. Meet ANSI / OSHA standards and clearly identify each system. Provide minimum 2-1/4-inch letters through 4-inch pipe and 4-inch letters for 5-inch pipe and larger.

C. Install identification in the following locations:
1. both sides of penetrations through walls, floors and ceilings.
2. Close to valves or flanges.
3. Intervals on straight pipe runs not to exceed 50 feet
4. Apply marker where view is obstructed.

D. Pipe markers shall meet or exceed the specifications of the ASME A13.1 “Scheme for Identification of Piping Systems”.

END OF SECTION

SECTION 23 21 13

HOT WATER AND CHILLED WATER PIPING, VALVES AND APPURTENANCES

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Furnish and install heating water and chilled water piping, valves and appurtenances, including fittings and strainers. Domestic hot water piping is specified in the Domestic Water Piping and Appurtenances section.

1.2 RELATED WORK

A. Division 23 Mechanical:
   1. Pipe and Pipe Fittings - General
   2. Valves, Strainers and Vents
   3. Vibration Isolation
   4. Insulation

PART 2 - PRODUCTS

2.1 PIPE AND FITTINGS

A. For pipe 2" and less in diameter, provide pipe conforming to ASTM A 53, Grade A or B, or ASTM A106 standard weight seamless, or electric-resistance welded black steel pipe. Furnish 150 lb. screwed malleable iron fittings conforming to ANSI B 16.3 for chilled water. Provide fittings conforming to ANSI B 16.4 for hot water.

B. For pipe 2-1/2" in diameter and larger, provide pipe meeting the requirements of ASTM A 53, Grade A or B, or ASTM A 106 standard weight seamless, or electric-resistance welded black steel pipe with standard weight seamless steel welded fittings, satisfying ASTM A 234, Grade WPA or WPB, ANSI B16.9.

2.2 VALVES

A. Refer to Section 23 05 23.

B. Refer to Building Management and Control System.

2.3 WATER SPECIALTIES

A. Automatic Air vents shall be float actuated high capacity air vent designed to purge free air from the system and provide shutoff at pressures up to 150 psig at a maximum temperature of 250 degrees F. The design of the high capacity air vent shall prevent air from entering the system if system pressure should drop below atmospheric pressure. The high capacity air vent shall purge free air at pressures up to 150 psig during normal system operation. The high capacity air vent shall be constructed of cast iron and fitted with components of stainless steel, brass, and EPDM.
   1. Acceptable Manufacturers: Bell & Gossett, Armstrong, Taco, and Wheatley.

PART 3 - EXECUTION

3.1 TESTING

A. Test all piping systems to assure they are absolutely leak free.

B. Apply a hydraulic pressure 1-1/2 times the operating pressure, 150 psig minimum, and check for leaks. Maintain test for a minimum of 24 hours. The piping system must remain absolutely tight

during this period. The satisfactory completion of any test or series of tests will not relieve the contractor of responsibility for ultimate proper and satisfactory operation of piping systems and their accessories. The test should be observed by the Architect / Engineer before pressure is removed and water drained.

END OF SECTION

SECTION 23 21 23

HVAC PUMPS

PART 1 - GENERAL

1.1 WORK INCLUDED

A. General characteristics for pumps specified in Division 23 - Mechanical.

1.2 RELATED WORK

Requirements for pumps are specified in other sections of Division 23 - Mechanical, including the following:

A. Division 23 Mechanical - Electrical Provisions of Mechanical Work.

1.3 PUMP SELECTION

A. Select pumps conservatively for scheduled conditions. Furnish pumps that have reasonably high efficiencies, with peak efficiency at or near rated conditions. Select pumps that will operate stably at 15' suction lift despite substantial reduction in head or substantial increase in delivery.

B. If the pumps proposed are not considered suitable, submit manufacturer's data on other pumps, for review.

C. Scheduled design flow, design head, pump efficiency, and motor horsepower are the minimum acceptable.

D. The pump curve shall rise continuously from maximum flow to cut-off.

E. Shut-off head approximately 10 percent greater than design head, unless otherwise indicated in pump schedules.

F. Pump brake horsepower shall not exceed the motor horsepower rating over the entire operating range from shut-off to run-out.

G. Select the pump for operation at or near peak efficiency.

H. Cavitation-free at all points on the curve.

I. Impeller diameter shall not exceed 90 percent of the maximum published diameter.

J. Pumps shall be suitable for parallel operation. Where pumps are operated in parallel, individual pumps shall be capable of stable operation with only one pump operating in the system. Submit pump curves with single and multiple pumps operating on system curve for approval.

1.4 PUMP SIZE AND TYPE

A. Provide motor-driven pumps of the type and speed scheduled. Select pumps that are not overloaded throughout the entire range of pump operation. Provide pump connection sizes as indicated.

B. The head capacities indicated in the schedules are listed for bidding purposes only. Calculate the operating head at each pump; take into consideration the actual routing of the various lines,

pressure drops in heat exchangers and coils, exact lengths of pipe, fittings, etc. Submit these calculations, together with copies of manufacturer's performance curves, as shop drawings on each pump. Clearly mark the curves for each pump to indicate the diameter of the impeller and the selection point.

1.5 CERTIFIED DATA

A. Submit factory certified pump curves showing pump performance characteristics with pump and system operating points plotted. Curves shall include as a minimum, flow (gallons per minute), head (feet of water), all available impeller diameters (inches), efficiency (percent), net positive suction head required (feet of water), brake horsepower, pump size and pump model. When multiple pumps are operating in parallel, show pump curves for one pump running, two pumps running, and so on. Show pump curves with system curve plotted.

PART 2 - PRODUCTS

2.1 VERTICAL IN-LINE (VIL) PUMPS

A. Pump Construction:
1. Pump casing, cast iron with 125 psig ANSI/PN16 flanges for working pressure below 175 psig at 150°F and ductile iron with 250 psig ANSI / PN25 flanges for working pressure to 375 psig at 150°F.
2. Suction and discharge connections shall be flanged and the same size and shall be drilled and tapped for seal flush and gauge connections.
3. Impeller: Bronze, fully enclosed type; dynamically balanced, two-plan balancing is required where installed impeller diameter is less than 6 times the impeller width.
4. Shaft: Provide stainless steel pump shaft.
5. Coupling: Rigid spacer type of high tensile aluminum alloy. Coupling is to be designed to be easily removed on site to reveal a space between the pump and motor shafts sufficient to remove all mechanical seal components for servicing and to be replaced without disturbing the pump or motor.
6. Mechanical seals shall be stainless steel multi-spring inside or outside balanced type with Viton secondary seal, carbon rotating face and silicon carbide stationary seat. Provide 316 stainless steel glad plate. Provide factory installed flush line with manual vent.
7. Split coupled pumps shall be provided with a lower seal chamber throttle bushing to ensure seals maintain positive cooling and lubrication.
8. Provide seal flush supply line to the mechanical seal with a 50 micron cartridge filter and sight flow indicator to suit the working pressure encountered. Filters shall be changed by the installing contractor after system is flushed and on a regular basis until turned over to the Owner.
9. Supply in the flush line to the mechanical seal a maintenance free sediment separator with sight flow indicator.

B. Single stage, single or double suction type, with pump characteristics which provide rising heads to shut off. Refer to pump schedule for pump flows and heads and motor speed, enclosure, efficiency and power requirements and other system conditions.

C. Pump Motor:
1. Premium efficiency
2. Totally enclosed fan cooled
3. Cast iron frame and end plate
4. Forge steel lifting eye
5. Over sized conduit box with ground lug
6. So sized with relation to the pump impeller that the brake horsepower requirements will not overload the motor at any point on the pump curve

7. Designed for Variable Frequency Drive Application
8. Minimum Efficiency

3 hp	1800 rpm	89.5%
5 hp	1800 rpm	90.2%
7.5 hp	1800 rpm	91.7%
10 hp	1800 rpm	91.7%
15 hp	1800 rpm	92.4%
20 hp	1800 rpm	93%
25 hp	1800 rpm	93.6%
30 hp	1800 rpm	94.1%
40 hp	1800 rpm	94.5%
50 hp	1800 rpm	94.5%
60 hp	1800 rpm	95%
75 hp+	1800 rpm	95.4%

D. Data plates:
1. Provide the pump with a nameplate constructed of 300 series stainless steel securely fastened to pump casing with stainless steel pins.
2. Locate the nameplate for easy visibility.
3. Clearly stamp the rating conditions and other data below, as a minimum, on the nameplate.
   a. Manufacturer, address, telephone number
   b. Pump model number
   c. Pump serial number
   d. Size (including impeller diameter scheduled in inches)
   e. Type
   f. Equipment designation as listed on the pump schedule.
   g. Flow scheduled (gallons per minute)
   h. Dynamic head scheduled (feet of water)
   i. Efficiency (percent)
   j. Shut-off head (feet of water)
   k. Speed (rpm)
   l. Brake horsepower
   m. Maximum brake horsepower with rated impeller
   n. Rotation
   o. Maximum allowable pressure (psig)

E. The schedule on the drawing sets forth the type of pump and GPM required.
1. The head capacities and horsepower are for bidding purposes only.
2. Make pump selection based on actual system calculations.

F. Acceptable manufacturers:
1. Bell & Gossett
2. TACO

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install the pumps in accordance with Manufacturer's "Installation, Start-up and Service Instructions".
1. Provide access space around pumps for service.
2. Install pumps on concrete housekeeping base, with anchor bolts, set and level, and grout in place. Install stainless steel drain pan with trough under chilled water pumps only.

3. Provide air cock and drain connection piped to floor drain.
4. Lubricate pumps prior to start-up.
5. Install condenser water pumps to ensure a full flooded suction.
6. Paint entire unit with two coats of machinery enamel after completion of installation.
7. Provide a spool piece between the suction diffuser and the suction side of the pump minimum length 8" face to face.
8. Provide pressure taps with valves on each side of the pump.
9. Install hot water circulator horizontally, properly supported to wall, in an accessible location for testing and maintenance at a height not to exceed 60” above finished floor. Install line size Ernst bronze rotating wheel, flow indicator with double window, downstream of circulator.

B. Provide a line size isolation valve and strainer on the pump suction and a line size silent check valve and balancing valve on the pump discharge. Provide an automatic air vent off the pump casing. For base mounted pumps, provide a drain line the full size of the base connection and extend it to and terminate it over the nearest floor drain.

C. Support piping adjacent to the pump such that no weight is carried on the pump casing. Decrease from pipe size with eccentric reducer on suction side and concentric increaser on discharge side.

D. Ensure pumps:
1. Operate at specified system fluid temperatures without vapor binding and cavitation.
2. Are non-overloading in parallel and individual operation.
3. Operate within 25 percent of midpoint of published maximum efficiency curve.

E. Refer to pump detail on the Contract Drawings for piping accessories to be provided.

3.2 ALIGNMENT FOR BASE MOUNTED PUMPS

A. Set the pump on a concrete inertia base or concrete housekeeping pad as specified; anchor, level and grout.

B. Align the pump and driver in accordance with Hydraulic Institute Standards for centrifugal, rotary and reciprocating pumps.

C. Realign the pump and driver after initial leveling of pump base before placing the grout and again after the grout has set and the foundation bolts are tightened. Recheck the alignment after the piping has been connected.

3.3 MANUFACTURER START-UP SERVICE ALIGNMENT

A. After installation, the pumps and motors are to be aligned by the manufacturer or their representative utilizing a dial indicator. After completion, a formal report must be submitted by the Manufacturer to the Engineer prior to final acceptance. This report must include pump serial number, location, beginning and final alignment at a minimum.
1. Technicians, as required, shall be trained and experienced in the work they perform (contractor start-up / alignment is unacceptable).

B. Before starting pumps, but after connecting piping:
1. Align shafts and coupling with a precision dial indicator alignment instrument to the minimum tolerances .004 (TIR) per inch of coupling radius or as recommended by the manufacturer, whichever is the greater.
2. Tabulate the actual pump alignment reading with manufacturer's minimum tolerances.
3. Submit readings for approval.
4. Include the approved readings in the Owner's Maintenance Manual.

3.4 FINAL PUMP FLOW CALIBRATION

A. Based on the results of the final phases of the test and balance sequences, if the flow of the unthrottled pump is more than 10% above the scheduled values:
   1. Request detailed instructions from the pump manufacturer for the correct impeller diameter.
   2. Trim the impeller to the diameter recommended by the manufacturer, employing precision machinery.

B. Enter the information on the final configuration of the pump in the Owner's Manual.
   1. Modify the pump nameplate to reflect the correct head and flow data and the impeller diameter.

3.5 SPARE PARTS

A. Provide the following spare parts and material to the Owner for his use after the warranty period.
   1. A mechanical seal for each pump
   2. A set of bearings for each pump

END OF SECTION

SECTION 23 25 13

CIRCULATING WATER SYSTEM CHEMICAL TREATMENT

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Provide equipment, chemicals and treatment materials for the complete water treatment system.

B. Determine which chemicals to use from the results of a water sample analysis taken from the building domestic water supply.

C. Provide water treatment products, holding reservoirs, equipment and labor for testing, cleaning, flushing and dispensing products to achieve the required water quality for each system specified.
   1. Closed chilled and hot water systems
   2. The cooling tower condenser water system
   3. Closed condenser water system

1.2 SERVICE AND SUPPLIES

A. All work shall be performed by a qualified, full-time, Water Program Manager.
   1. Specialist in the field of industrial water treatment.
   2. Facilities include water analysis laboratory, development facilities and service department.

B. Provide a water treatment test set for each system (pH, alkalinity, hardness, chloride) for field use including test equipment and reagents as required for specific use with the treatment products employed.

C. Where specialized supplementary testing or control equipment is required, provide appropriate items.

D. Provide a water management and service program for a period of one year beginning at substantial completion. Make routine visits bi-weekly during first two months of operation and monthly during the remainder of the specified period.

E. Routing Services
   1. Check and adjust water treatment system operation.
   2. Instruct, train and advise operating personnel.
   3. Check efficiency of chemicals and chemical applications.
   4. Replenish chemicals and replace expendables.
   5. Clean or replace filter in feeder.

F. Chemically clean the piping system.

G. Provide a complete laboratory analysis of water samples. Insert in the Owner's manuals.

H. Provide review of report figures in the field water testing.

1.3 QUALITY ASSURANCE

A. Acceptable program manager shall have:
   1. Research and development facilities.
   2. Regional laboratories capable of making water analysis.

3. A service department and qualified technical service representatives located within a reasonable distance of the project site.
4. Service representatives who are registered Engineers or factory-certified technicians with not less than 5 years of water treatment experience with the water treatment system manufacturer.

B. Ensure that all products, packaging, blow-down or other effluents do not violate local, state, or federal laws or regulations. Use only chemicals that are registered, when required, with the U.S. Department of Agriculture or the U.S. Environmental Protection Agency and that are labeled as required by law.

C. Provide electrical products that have been tested, listed and labeled by Underwriters Laboratories and comply with the National Electrical Manufacturers Association Standards.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Chem-Aqua

2.2 CLOSED HOT WATER SYSTEM

A. By-pass filter feeders in the hot water and chilled water systems:
1. Rated at 40-gpm capacity.
2. Operating conditions: 150 psig and 250°F.
3. Quick opening cap with a Buna N-O ring seal; or 1-1/2" valve and funnel.
4. 5 micron polypropylene filter bag mounted in a perforated stainless steel holder. Filter bag shall be supported from top of feeder.
   a. Filter bag and holder shall extend full length of feeder tank.
   b. Bottom feed tanks are not acceptable.
5. Fabricated hot dipped galvanized steel support legs and frame. Refer to detail drawing for requirements.
6. Provide sufficient quantity of filter bags for warranty period. Minimum of six additional bags provided to owner.

B. Acceptable Manufacturers
1. Neptune Model FTS-5
2. Efficiency Dynamics FF-100.
3. J.L. Wingert Model FHC-5HD.
4. Hydro-systems HS-800
5. Vector Industries, Inc. FA-900

C. Treatment chemicals:
1. Furnished as a concentrated liquid in 5 gallon pails
2. A corrosion inhibitor of the nitrite-borate type.
3. Maintained at a nitrite residual of 600 – 800 ppm in chilled loops and 1000-1500 in hot loops.
4. With effective copper, black iron, stainless steel and aluminum corrosion inhibitors.
5. Form a protective film to prevent corrosion and scale formation.
6. Have colored dye to indicate presence.

D. Multiple chemicals used in a common system shall be compatible.

E. Flow Indicator:

1. Bronze Construction
2. Rotating Wheel
3. Line Size
4. Double Window
5. Ernst Flow Industries Model EFIE-57-3

PART 3 - EXECUTION

3.1 INSTALLATION/START-UP

A. In accordance with manufacturer's recommendations.

B. Anchor the chemical filter feeder to a concrete housekeeping pad using wedge type expansion anchors.

D. Clean and flush closed loops systems.
1. Clear water flush systems before introducing chemical cleaners.
2. Chemical cleaner shall be introduced into the systems to remove construction related oils, greases, threading compounds, and silt.
3. Chemical Cleaner shall passivate and pre-film pipe system.

3.2 WATER ANALYSIS

A. The chemical treatment agency shall provide the services of a testing laboratory to perform a site water analysis. As a minimum, conduct the following tests in accordance with ASTM standards and to the satisfaction of the Owner/Architect/Engineer.
1. Silica in water and wastewater.
2. Acidity or alkalinity of water.
3. Iron in water.
4. Hardness of water.
5. Ph of water.
6. Particulate and Dissolved Matter, Solids or Residue in Water.
7. Turbidity in water.
8. Corrosivity of water in absence of heat transfer.
9. Standard practices for sampling water.

B. Take water samples in accordance with ASTM.

C. Prepare a test report in accordance with ASTM for each of the tests conducted.

D. Submit the test reports to the Architect/Engineer.

3.3 CHEMICAL TREATMENT

A. The chemical treatment agency shall provide complete services necessary for chemically cleaning and treatment the following systems:
1. Chilled water.
2. Hot water.
3. Condenser water.

B. The chemical treatment agency shall provide, but not be limited to the following:
1. Equipment and installation.
2. Chemicals.
3. Analytical and testing work.
4. Inspection.

5. Calculations.
6. Assistance to the trade installing the piping.
7. Instruction to Owner.

C. Determine which chemicals to use from the results of site water analysis. Provide the chemical necessary to achieve the desired water condition.

D. Examine and supervise flushing and pipe cleaning operations and verify that the systems are clean, free of debris and rust and other construction materials before starting water treatment.

E. After the piping has been flushed, cleaned, rinsed and charged with chemicals, then start-up and operate the chemical treatment equipment to provide steady, stable characteristics for the systems treated.

F. During construction, instruct the Contractor in the field piping and wiring of chemical feeding equipment. If such piping and wiring details are not shown on the Contract Drawings, then provide all equipment, piping, wiring, instrumentation and chemicals to provide a complete and operating system without additional cost.

G. After the chemical treatment is functioning as intended, the chemical treatment agency shall demonstrate to the Architect/Engineer the chemical treatment operation.

3.4 OWNER TRAINING

A. A chemical treatment agency, in conjunction with the chemical treatment equipment manufacturer's factory representative, shall train the Owner to operate and maintain the chemical treatment system as a whole and in part for each piece of equipment.

B. Furnish to the Owner a chemical treatment administration manual covering the chemical treatment program for each of the systems treated. The manual shall include, but not be limited to:
1. Name, address and telephone number of the chemical treatment agency and each of the equipment manufacturers.
2. Operation and maintenance manuals.
3. Test reports.
4. Chemical data sheets.
5. A narrative describing the chemical treatment program for each of the systems being treated.

3.5 TESTING AND INSPECTION

A. After the systems have been accepted, the chemical treatment agency shall visit the site every month during the warranty period.

B. During each visit:
1. Check and adjust the chemical treatment equipment.
2. Check the chemistry of the treated system to confirm the chemicals are maintaining the system as intended.
3. Advise and instruct the Owner on operational changes made to the chemical treatment program.
4. Take a water sample of each system being chemically treated and have the samples tested by a testing laboratory. Prepare a report for each water sample and submit it to the Owner. Include in the test report the changes that need to be made to the chemical treatment program.
5. Maintain complete records of the treatment program for each system at the project site. Keep the records in a hardbound manual with the building manager. A second copy shall

be maintained by the agency for the agency's records.

C. Routine visits must be coordinated with the Owner.

D. Send copy of monthly report to Engineer for Verification.

END OF SECTION

SECTION 23 65 27

AIR COOLED ROTARY SCROLL CHILLER

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Furnish and install a packaged, electric-driven, air-cooled, water chilling unit with multiple scroll compressors complete with controls.

1.2 RELATED WORK

A. Division 23 - Mechanical
   1. Chilled Water Piping
   2. Insulation
   3. Building Management Control System
   4. Vibration Isolation
   5. Electrical Provisions of Mechanical Work

1.3 REFERENCES

A. ANSI/ARI 550/590 - Water Chilling Packages using the Vapor Compression Cycle.
B. ANSI/ASHRAE 15 - Safety Code for Mechanical Refrigeration.
C. ANSI/ASHRAE 90A - Energy Conservation in New Building Design.
D. ANSI/ASME SEC 8 - Boiler and Pressure Vessel Code
E. ANSI/NEMA MG 1 - Motors and Generators.
F. ANSI/UL 465 - Central Cooling Air Conditioners.
G. ANSI/AFBMA 9-1978 - Load Ratings and Fatigue Life for Ball Bearings. Bearings must have life of not less than 200,000 hours.
H. ANSI/NFPA Standard 70 - National Electrical Code (NEC)
I. ASTM B117 - Standard Method of Salt Spray (Fog) Testing
J. ASTM A123 - Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
K. ASTM A525 - Zinc (Hot-Dip Galvanized) Coatings on Sheet Steel Products
L. ASTM D1654 - Evaluation of Painted or Coated Specimens, Subjected to Corrosive Environments.

1.4 PERFORMANCE

A. Provide performance as scheduled on drawings.

1.5 WARRANTY

A. The Chiller manufacturer shall provide a full machine parts, labor, and refrigerant warranty for a period of five (5) years from substantial completion.
   1. The warranty shall include, but not be limited to the compressor assemblies including motor, condensers, fans, variable frequency drives, controls, evaporator, condenser, refrigeration system and all other auxiliary components and accessories as well as refrigerant and oils in systems.
   2. In the event of failure, provide new or factory authorized rebuilt parts. Shop or job site rebuilt parts are not acceptable.
   3. On all manufacturers warranties the chiller manufacturer shall provide a factory certificate listing as a minimum chiller model, serial, and warranty information as specified above. Each chiller tag shall be provided with an individual and unique warranty certificate.

Manufacturer’s representative warranty letters are not acceptable as an alternative to the original manufacturer’s certificates.

4. The chiller manufacturer authorized service agency is required to perform any and all warranty service. Contractor warranty service is not authorized. Warranty work shall be performed with District Representative present.

1.6 SUBMITTALS

A. Submit manufacturer's certified computer generated performance and capacity data in accordance with specification requirements.

B. Submit the following information:
1. Manufacturer's installation instructions.
2. Minimum Circuit Ampacity.
3. Maximum Overcurrent Protection size.
4. Maximum conductor / Terminal Lug size.
5. Minimum flow thru evaporator.
6. Electrical interlocks.

C. Submit recommended clearance dimensions for air flow and service.

D. Submit coordination drawings as specified.
1. Give consideration to adjacent structures as they affect air flow patterns.

E. Submit internal wiring diagram of Control Center.

F. Submit sequence of operation in narrative form.

G. Submit a letter stating chiller being proposed meets the efficiency requirements of Centerpoint Energy’s Score Program listed in Centerpoint Energy’s Design Guide: HVAC Recommendations document.

H. Mark-up a copy of the specifications, indicating in the margin of each paragraph, the following: COMPLY, DO NOT COMPLY, NOT APPLICABLE.

1.7 STORAGE/HANDLING/SHIPPING

A. Comply with manufacturer's installation instructions for rigging, unloading, and transporting units.

B. Protect units from physical damage. Factory coil shipping covers shall be kept in place until installation.

C. Unit controls shall be capable of withstanding 203°F (95°C) storage temperatures in the control compartment for an indefinite period of time.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Carrier

B. Daikin

C. Trane

2.2 COMPRESSORS

A. Provide a minimum of two independently circuited hermetic rotary scroll type compressors with the following:
   1. Direct drive, 3600 rpm, suction gas-cooled hermetic motor.
   2. Rubber isolation pads.
   3. Crankcase heaters.
   4. Oil sight glass.
   5. Load and unload solenoid valves.
   6. Discharge oil separator.
   7. Hot gas bypass for compressor unloading.
   8. Centrifugal oil pump.
   9. Oil charging valve.

B. Provide capacity modulation from 100% to 25% via compressor cycling.
   1. Control to be based upon leaving chilled water.
   2. To avoid excessive compressor cycling while maintaining leaving chilled water temperature at desired temperature +/- differential, compressor cycling set points to be separated by a minimum 20% capacity dead band.

2.3 CONDENSER COILS

A. Coil shall be microchannel design and shall have a series of flat tubes containing multiple, parallel flow microchannel layered between the refrigerant manifolds. Tubes shall be 9153 aluminum alloy. Tubes made of 3102 alloy or other alloys of lower corrosion resistance shall not be accepted. Long Life Alloy Microchannel shall pass 4500hr salt spray rating uncoated.

B. Protect all vertical or angled coil sections from hail or physical damage with corrosion resistant louvered hail guard including chiller ends, factory installed to cover compressor and condenser sections.

C. Field adjustable head pressure based fan cycling controls for each circuit capable of maintaining minimum head pressure down to 20°F unless noted otherwise.

D. Protect condenser coils during shipping.

E. Provide condenser coils coated with corrosion resistant epoxy utilizing a dip and bake. Coating shall be flexible and uniformly bonded to all condenser coil surfaces.

2.4 FANS AND MOTORS

A. Direct drive propeller type fans.
   1. Vertical discharge with sound reduction.
   2. Protect fan blades with a heavy-gauge wire guard.
   3. Statically and dynamically balanced
   4. Sound reduction type fan blades and shrouds
   5. All condenser fans shall have integral drives to provide variable speed for optimized efficiency.

B. Motors with built in thermal overload protection
   1. Permanently lubricated ball bearings.
   2. Weatherproof (TEAO or TEFC) motors.

2.5 COOLER/EVAPORATOR

A. Provide tube-in-shell direct expansion cooler or brazed plate and frame direct expansion cooled with:
   1. Tube-in-shell
      a. Copper tube and steel shell construction
      b. 300 psig water side working pressure
      c. ASME coded 225 psig refrigerant side working pressure
      d. Fully independent refrigerant circuit for each group of compressors.
      e. Serviceable construction including removable heads and field replaceable tubes.
      f. Drain and vent connection.
   2. Brazed plate
      a. Copper and stainless steel construction
      b. 150 psig water side working pressure
      c. ASME coded 430 psig refrigerant side working pressure
      d. Fully independent refrigerant circuit for each compressor.
      e. Serviceable construction including removable heads and field replaceable tubes.
      f. Drain and vent connection.

B. Protect cooler with ambient controlled heater cable and minimum 1-1/4" thick flexible elastomeric rubber closed cell insulation. Heater cable to protect evaporator to -20°F (-29°C). Heater cable shall be wrapped helically around the shell under the insulation.

C. Protect insulation and equipment from abrasion by unit enclosure.

D. After completion of successful start-up, installing contractor shall seal all openings.

E. Provide water drain connection, vent and fittings for factory installed leaving water temperature control and low temperature cutout sensors.

F. Water connections shall be grooved or flanged.

G. Proof of flow shall be provided by the equipment manufacturer factory installed.

H. Provide field installed evaporator inlet strainer.

2.6 CASING/ENCLOSURES

A. House components in minimum 14 gauge galvanized steel frame and mounted on welded structural steel base. Hot-dip galvanized steel frame coating shall be Underwriters Laboratories Inc. (UL) recognized as G90-U, UL guide number DTHW2.

B. Unit panels, and control panels shall be 14 gauge, finished with a baked on powder paint. Control panel doors shall have door stays. Paint system shall meet the requirements for outdoor equipment of Federal Government Agencies.

C. Mount starters and disconnects in weatherproof panel provided with full opening access doors. Provide lockable disconnect operating handle external to panel and clearly visible from outside of unit indicating if power is on or off.

D. Casings fabricated from steel that do not have a Zinc coating conforming to ASTM A 123 or ASTM A525 shall be treated for the prevention of corrosion with a factory coating or paint system. The coating or paint system shall withstand 672 hours in a salt-spray fog test in accordance with ASTM B 117. Each specimen shall have a standard scribe mark as defined in ASTM D 1654. Upon completion of exposure, the coating or paint system shall be evaluated and rated in accordance with procedures A and B of ASTM D 1654. The rating of failure at the scribe mark shall be not less than six (average creepage not greater than 1/8"). The rating of the unscribed area

shall not be less than ten (no failure). Thickness of coating or paint system on the actual equipment shall be identical to that on the test specimens with respect to materials, conditions of application, and dry-film thickness.

E. Coated wire mesh to limit access beneath the condenser coils, cooler, and compressor section area.

F. Convenience outlet (GFIC) at control panel connected to 120-vac circuit provided for heat tracing on cooler.

G. A control power transformer shall be factory installed within the chiller control panel to provide unit control power.

2.7 REFRIGERANT CIRCUIT

A. All units shall have a separate independent refrigerant circuit for each compressor. Twenty & 30 Ton single circuit; 40, 50 & 60 Tons, dual individual refrigerant circuits.

B. Provide for each refrigerant circuit:
1. Liquid line isolation valve.
2. Filter dryer (replaceable core type).
3. Liquid line sight glass and moisture indicator.
4. Electronic or thermal expansion valve sized for maximum operating pressure. Expansion valves with less than five years of proven field operation are not acceptable.
5. Charging valve.
6. Discharge and oil line check valves.
7. Compressor suction and discharge service valves.
8. Relief valve.
9. Full operating charge of refrigerant and oil.
10. Unit factory leak tested at 200 psig.

2.8 CONTROL PANEL

A. The Control Center.
1. NEMA 3R weatherproof cabinet with hinged lockable outer door.
2. Control system.
3. Solid-state compressor three phase motor protection.
4. Single point field power connection points.
5. Control interlock terminals.
6. Fan motor and control circuit fuses.
7. Individual contactors for each fan motor.
8. Unit power terminal blocks for connection to remove disconnect switch.
9. Power supply terminals for evaporator heater circuit.
10. Dead front panels over line voltage.
11. Control power / circuit transformer.
12. Provide incoming power terminals, sized to accept the feeder conductors.
13. Chiller run and alarm status relay cards.

B. Microprocessor control system.
1. Stage unit based on leaving water temperature control.
2. Oil differential pressure setpoints.
3. Motor protection.
4. High pressure alarm.
5. Loss of refrigerant alarm.
6. Loss of water flow alarm.
7. Freeze protection alarm.

8. Low refrigerant pressure alarm.
9. Auto start/stop switch.
10. Chilled water setpoint adjustment.
11. Anti-recycle timer.
12. Compressor run status.
13. Password protection.
14. Low water temperature safety (freeze protection).
15. Automatic pump down cycle.
16. Limit supply water temperature pull down on start up to 1° per minute.
17. Automatic lead-lag sequence change of compressors.
18. Unload the compressors if the return water is too high.
19. Compressor starts with the controlled cylinders unloaded.
20. Reset of the chilled water temperature.
21. Indicate status of safeties.
22. Non-volatile memory (EPROM) with setpoints retained with battery backup.
23. Automatic high pressure unloader to unload compressor at pressures above 375 psig.
24. Auto restart after power failure.
25. BacNET interface
26. Alarm Relay
27. Percent of Running Load Amperage

C. Display the following information with 16 key keypad with two line x 40 character clear English Display for outdoor viewing.
1. Supply and Return water temperature.
2. Low water temperature cutout setting.
3. Low ambient temperature cutout setting.
4. Outdoor air temperature.
5. English and Metric data.
6. Suction pressure cutout setting.
7. Each system suction pressure.
8. Each system discharge pressure.
9. Each system oil pressure.
10. Percent of full load motor current.
11. Liquid control range. (2.0 - 20°F above setpoint).
12. Liquid pulldown rate sensitivity adjustment.
13. Anti-recycle timer status for each compressor.
12. Compressor starts & operating run hours.
13. Safety shutdown shall be date and time stamped.
14. Compressor run status.
15. History and alarm diagnostic memory display.

D. All control functions and information shall be available at the unit control panel or via RS 232 cable and phone modem to personal computer.

E. Chiller shall include a relay board with dry contacts for alarms to notify a Building Automation System of certain events or statues of the chiller.

F. Chiller shall include input for leaving chilled water temperature setpoint based upon a 2-10VDS or 4-20mA signal from a Building Automation System.

G. Chiller shall include input for chiller current limit setpoint based upon a 2-10VDC or 4-20mA signal from a Building Automation System.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install system in accordance with manufacturer's instructions. Install conduit and controls in bottom of unit electrical. No penetration into top of cabinet.

B. Where the chiller unit is mounted on a grade, a concrete pad shall be provided that is a minimum of 4" high and extends 6" all around the chiller.

C. Align chiller package on steel or concrete foundations.

D. Locate away from overhead restrictions. Maintain side clearances according to manufacturer's recommendations and maintain overhead clearance to allow full elimination of hot air discharge.

E. Install units on vibration isolation pads.

F. Arrange piping for easy dismantling to permit tube cleaning, removing and or repair.

G. Level chiller.

H. Provide flexible elastomeric rubber closed cell insulation to prevent condensation from occurring at cooler and suction piping. After completion of successful start-up, installing contractor shall seal all openings in insulation and apply a protective aluminum sheetmetal jacket over insulation.

3.2 CHILLER MANUFACTURER START-UP/ FIELD SERVICES

A. Provide the services of a factory trained service technician employed full time by the chiller manufacturer to start-up the system. Technicians, as required, shall be factory trained and experienced in the work they perform. (Contractor startup is unacceptable.)

B. The technicians shall utilize comprehensive report forms to document results. Sample forms shall be submitted for review prior to commencing work.

C. Upon completion of the work, the report forms shall be signed by the technicians and their supervisor and included in the final report and Owner's manual.

D. Submit four copies of the final report to the Architect/Engineer for approval within 10 working days of start-up.

E. Follow the manufacturer's start-up procedures.
1. Verify interlocks.
2. Test and verify operation of safety controls.
3. Calibrate controls.
4. Verify microprocessor based control operation.
5. Test, calibrate, and set the chilled water temperature controls.
6. Verify chilled water temperature reset sequence.
7. Verify operation of the integrated control panel.

F. Measure and record the following data:
1. Chilled water entering/leaving temperature.
2. Chilled water flow through the chiller.
3. Suction pressure/condensing pressure.
4. Suction pressure/unloading steps.
5. Air entering/leaving condenser; dry bulb temperature.
6. Outdoor ambient; dry bulb.

7. Motor nameplate voltage; phase and full load amperes.
8. Heater coil in starter (as applicable)
    a. Rating in amperes.
    b. Manufacturer's recommendation.
9. Power reading (voltage and amperes of legs at motor terminals).

G. Test and calibrate the operation of the electronic ground current sensing devices.

H. If the system has been shipped with a holding charge, provide the following:
1. Leak test.
2. Refrigerant pressure test.
3. Evacuate, dehydrate and charge.

I. Verify that accessories are installed and performing the specified functions. Insert certification in Owner's manual.

J. Instruct the Owner's operating personnel. Provide Owner with 8 hours of training prior to substantial completion.

K. Do not operate the equipment for any reason until the factory start-up service has been completed.

L. Provide a print-out from the unit micro-computer control system showing the correct operation of all system controls and components.

M. Provide minimum 24 hour history log displaying accuracy of temperature control system in 15 minute intervals and documented number of compressor cycles during the 24 hour period.

END OF SECTION

SECTION 23 65 28

AIR-COOLED VARIABLE SPEED ROTARY SCREW CHILLER

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Furnish and Install a packaged, electric-driven, air-cooled, water chilling unit with variable speed rotary screw compressors complete with controls.

1.2 RELATED WORK

A. Division 23 – Mechanical:
   1. Chilled Water Piping
   2. Insulation
   3. Building Management Control System
   4. Vibration Isolation.
   5. Electrical Provisions of Mechanical Work.

1.3 REFERENCES

A. ANSI/ARI 550/590 - Water Chilling Packages using the Vapor Compression Cycle.
B. ANSI/ASHRAE 15 - Safety Code for Mechanical Refrigeration.
C. ANSI/ASHRAE 90A - Energy Conservation in New Building Design.
D. ANSI/ASME SEC 8 - Boiler and Pressure Vessel Code
E. ANSI/NEMA MG 1 - Motors and Generators.
F. ANSI/UL 465 - Central Cooling Air Conditioners.
G. ANSI/AFBMA 9-1978 - Load Ratings and Fatigue Life for Ball Bearings. Bearings must have life of not less than 200,000 hours.
H. ANSI/NFPA Standard 70 - National Electrical Code (NEC)
I. ASTM B117 - Standard Method of Salt Spray (Fog) Testing
J. ASTM A123 - Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
K. ASTM A525 - Zinc (Hot-Dip Galvanized) Coatings on Sheet Steel Products
L. ASTM D1654 - Evaluation of Painted or Coated Specimens, Subjected to Corrosive Environments.

1.4 PERFORMANCE

A. Provide performance as scheduled on drawings.

1.5 WARRANTY

A. The Chiller manufacturer shall provide a full machine parts, labor, and refrigerant warranty for a period of five (5) years from substantial completion.
   1. The warranty shall include, but not be limited to the compressor assemblies including motor, condensers, fans, variable frequency drives, controls, evaporator, condenser, refrigeration system and all other auxiliary components and accessories as well as refrigerant and oils in systems.
   2. In the event of failure, provide new or factory authorized rebuilt parts. Shop or job site rebuilt parts are not acceptable.
   3. On all manufacturers warranties the chiller manufacturer shall provide a factory certificate listing as a minimum chiller model, serial, and warranty information as specified above. Each chiller tag shall be provided with an individual and unique warranty certificate. Manufacturer's representative warranty letters are not acceptable as an alternative to the original manufacturer's certificates.

4. The chiller manufacturer authorized service agency is required to perform any and all warranty service. Contractor warranty service is not authorized. Warranty work shall be performed with District Representative present.

1.6 SUBMITTALS

A. Submit manufacturer's certified computer generated performance and capacity data in accordance with specification requirements.

B. Submit the following information:
1. Manufacturer's installation instructions.
2. Minimum Circuit Ampacity.
3. Maximum Overcurrent Protection size.
4. Maximum conductor / Terminal Lug size.
5. Minimum flow thru evaporator.
6. Electrical interlocks.

C. Submit recommended clearance dimensions for air flow and service.

D. Submit coordination drawings as specified.
1. Give consideration to adjacent structures as they affect air flow patterns.

E. Submit internal wiring diagram of Control Center.

F. Submit sequence of operation in narrative form.

G. Submit a letter stating chiller being proposed meets the efficiency requirements of Centerpoint Energy's Score Program listed in Centerpoint Energy's Design Guide: HVAC Recommendations document.

H. Mark-up a copy of the specifications, indicating in the margin of each paragraph, the following: COMPLY, DO NOT COMPLY, NOT APPLICABLE.

1.7 STORAGE/HANDLING/SHIPPING

A. Comply with manufacturer's installation instructions for rigging, unloading, and transporting units.

B. Protect units from physical damage. Factory coil shipping covers shall be kept in place until installation.

C. Unit controls shall be capable of withstanding 203°F (95°C) storage temperatures in the control compartment for an indefinite period of time.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Carrier

B. Daikin

C. Trane

2.2 COMPRESSORS

A. Provide a minimum of two independently circuited semi-hermetic direct drive, variable speed rotary

screw compressors with the following:
1. Rubber isolation pads.
2. Crankcase heaters.
3. Semi-hermetic motor.
4. Oil sight glass.
5. Load and unload solenoid valves.
6. Discharge oil separator.

B. Provide compressor with automatic capacity reduction equipment consisting of a capacity control variable speed drive. The controls system logic must start the compressor at minimum speed for a soft start.
1. Control to be based upon leaving chilled water.

2.3 CONDENSER COILS

A. Coil shall be microchannel design and shall have a series of flat tubes containing multiple, parallel flow microchannel layered between the refrigerant manifolds. Tubes shall be 9153 aluminum alloy. Tubes made of 3102 alloy or other alloys of lower corrosion resistance shall not be accepted. Long Life Alloy Microchannel shall pass 4500hr salt spray rating uncoated.

B. Protect all vertical or angled coil sections from hail or physical damage with corrosion resistant louvered hail guard including chiller ends, factory installed to cover compressor and condenser sections.

C. Field adjustable head pressure based fan cycling controls for each circuit capable of maintaining minimum head pressure down to 20°F unless noted otherwise.

D. Protect condenser coils during shipping.

E. Provide condenser coils coated with corrosion resistant epoxy utilizing a dip and bake. Coating shall be flexible and uniformly bonded to all condenser coil surfaces.

2.4 FANS AND MOTORS

A. Direct drive propeller type fans.
1. Vertical discharge with sound reduction.
2. Protect fan blades with a heavy-gauge wire guard.
3. Statically and dynamically balanced
4. Sound reduction type fan blades and shrouds
5. All condenser fans shall have integral drives to provide variable speed for optimized efficiency.

B. Motors with built in thermal overload protection
1. Permanently lubricated ball bearings.
2. Weatherproof (TEAO or TEFC) motors.

2.5 EVAPORATOR

A. Provide tube-in-shell direct expansion cooler or brazed plate and frame direct expansion cooled with:
1. Tube-in-shell
a. Copper tube and steel shell construction
b. 300 psig water side working pressure
c. ASME coded 225 psig refrigerant side working pressure
d. Fully independent refrigerant circuit for each group of compressors.
e. Serviceable construction including removable heads and field replaceable tubes.
f. Drain and vent connection.

2. Brazed plate
    a. Copper and stainless steel construction
    b. 150 psig water side working pressure
    c. ASME coded 430 psig refrigerant side working pressure
    d. Fully independent refrigerant circuit for each compressor.
    e. Serviceable construction including removable heads and field replaceable tubes.
    f. Drain and vent connection.

B. Protect cooler with ambient controlled heater cable and minimum 1-1/4" thick flexible elastomeric rubber closed cell insulation. Heater cable to protect evaporator to -20ºF (-29ºC). Heater cable shall be wrapped helically around the shell under the insulation.

C. Protect insulation and equipment from abrasion by unit enclosure.

D. After completion of successful start-up, installing contractor shall seal all openings and apply a protective aluminum sheet metal cover.

E. Provide water drain connection, vent and fittings for factory installed leaving water temperature control and low temperature cutout sensors.

F. Water connections shall be grooved or flanged.

G. Proof of flow shall be provided by the equipment manufacturer factory installed.

H. Provide field installed evaporator inlet strainer.

2.6 CASING/ENCLOSURES

A. House components in minimum 12 gauge galvanized steel frame and mounted on welded structural steel base. Hot-dip galvanized steel frame coating shall be Underwriters Laboratories Inc. (UL) recognized as G90-U, UL guide number DTHW2.

B. Unit panels, and control panels shall be finished with a baked on powder paint. Control panel doors shall have door stays.

C. Mount starters and disconnects in weatherproof panel provided with full opening access doors. Provide lockable disconnect operating handle external to panel and clearly visible from outside of unit indicating if power is on or off.

D. Casings fabricated from steel that do not have a Zinc coating conforming to ASTM A 123 or ASTM A525 shall be treated for the prevention of corrosion with a factory coating or paint system. The coating or paint system shall withstand 500 hours in a salt-spray fog test in accordance with ASTM B 117. Each specimen shall have a standard scribe mark as defined in ASTM D 1654. Upon completion of exposure, the coating or paint system shall be evaluated and rated in accordance with procedures A and B of ASTM D 1654. The rating of failure at the scribe mark shall be not less than six (average creepage not greater than 1/8"). The rating of the unscribed area shall not be less than ten (no failure). Thickness of coating or paint system on the actual equipment shall be identical to that on the test specimens with respect to materials, conditions of application, and dry-film thickness.

E. Coated wire mesh to limit access beneath the condenser coils, cooler, and compressor section area.

F. Convenience outlet (GFIC) at control panel connected to 120-vac circuit provided for heat tracing on cooler.

G. A control power transformer shall be factory installed within the chiller control panel to provide unit control power.

2.7 REFRIGERANT CIRCUIT

A. All units shall have a separate independent refrigerant circuit for each compressor.

B. Provide for each refrigerant circuit:
1. Liquid line isolation valve.
2. Filter dryer (replaceable core type).
3. Liquid line sight glass and moisture indicator.
4. Electronic expansion valve sized for maximum operating pressure. Expansion valves with less than five years of proven field operation are not acceptable.
5. Charging valve.
6. Discharge and oil line check valves.
7. Compressor suction and discharge service valves.
8. Relief valve.
9. Full operating charge of refrigerant and oil.

2.8 CONTROL PANEL

A. The Control Center.
1. NEMA 3R weatherproof cabinet with hinged lockable outer door.
2. Control system.
3. Solid-state compressor three phase motor protection.
4. Single point field power connection points.
5. Control interlock terminals.
6. Fan motor and control circuit fuses.
7. Individual contactors for each fan motor.
8. Unit power terminal blocks for connection to remove disconnect switch.
9. Power supply terminals for evaporator heater circuit.
10. Dead front panels over line voltage.
11. Control power / circuit transformer.
12. Provide incoming power terminals, sized to accept the feeder conductors.
13. Pump output relay for chilled water pump control
14. Freeze protection and low limit control of pumps
15. Chiller run and alarm status relay cards.

B. Microprocessor control system.
1. Stage unit based on leaving water temperature control.
2. Oil differential pressure setpoints.
3. Motor protection.
4. High pressure alarm.
5. Loss of refrigerant alarm.
6. Loss of water flow alarm.
7. Freeze protection alarm.
8. Low refrigerant pressure alarm.
9. Auto start/stop switch.
10. Chilled water setpoint adjustment.
11. Anti-recycle timer.
12. Compressor run status.
13. Password protection.
14. Low water temperature safety (freeze protection).
15. Automatic pump down cycle.
16. Limit supply water temperature pull down on start up to 1° per minute.
17. Automatic lead-lag sequence change of compressors.
18. Unload the compressors if the return water is too high.
19. Compressor starts with the controlled cylinders unloaded.

20. Reset of the chilled water temperature.
21. Indicate status of safeties.
22. Non-volatile memory (EPROM) with setpoints retained with battery backup.
23. Automatic high pressure unloader to unload compressor at pressures above 375 psig.
24. Auto restart after power failure.
25. BacNET Interface
26. Alarm Relay
27. Percent of Running Load Amperage

C. Display the following information with Alphanumeric Liquid Crystal Display for outdoor viewing.
1. Supply and Return water temperature.
2. Low water temperature cutout setting.
3. Low ambient temperature cutout setting.
4. Outdoor air temperature.
5. English and Metric data.
6. Suction pressure cutout setting.
7. Each system suction pressure.
8. Each system discharge pressure.
9. Each system oil pressure.
10. Percent of full load motor current.
11. Liquid control range. (2.0 - 20°F above setpoint)
12. Liquid pull down rate sensitivity adjustment.
13. Anti-recycle timer status for each compressor.
12. Compressor starts & operating run hours.
13. Safety shutdown shall be date and time stamped.
14. Compressor run status.
15. Display data in English or metric units.

D. All control functions and information shall be available at the unit control panel or via RS 232 cable and phone modem to personal computer.

E. Chiller shall include a relay board with dry contacts for alarms to notify a Building Automation System of certain events or statues of the chiller.

F. Chiller shall include input for leaving chilled water temperature setpoint based upon a 2-10VDS or 4-20mA signal from a Building Automation System.

G. Chiller shall include input for chiller current limit setpoint based upon a 2-10VDC or 4-20mA signal from a Building Automation System.

2.9 LOW VOLTAGE VARIABLE SPEED DRIVE, UNIT MOUNTED

A. The water chiller shall be furnished with an air cooled variable speed drive (VSD) as shown on the drawings.

B. The VSD will be specifically designed to interface with the water chiller controls and allow for the operating ranges and specific characteristics of the chiller.

C. The VSD efficiency shall be 97% or better at full speed and full load. Fundamental displacement power factor shall be a minimum of 0.96 at all loads.

D. The VSD shall be solid state, microprocessor based pulse-width modulated (PWM) design. The VSD shall be voltage and current regulated. Output power devices shall be IGBTs.

E. Power semi-conductor and capacitor cooling shall be from a liquid or air cooled heatsink.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install system in accordance with manufacturer's instructions.

B. Where the chiller unit is mounted on a grade, a concrete pad shall be provided that is a minimum of 4" high and extends 6" all around the chiller.

C. Align chiller package on steel or concrete foundations.

D. Locate away from overhead restrictions. Maintain side clearances according to manufacturer's recommendations and maintain overhead clearance to allow full elimination of hot air discharge.

E. Install units on vibration isolation pads.

F. Arrange piping for easy dismantling to permit tube cleaning, removing and or repair.

G. Level chiller.

H. Provide flexible elastomeric rubber closed cell insulation to prevent condensation from occurring at cooler and suction piping. After completion of successful start-up, installing contractor shall seal all openings in insulation and apply a protective aluminum sheetmetal jacket over insulation.

3.2 CHILLER MANUFACTURER START-UP/ FIELD SERVICES

A. Provide the services of a factory trained service technician employed full time by the chiller manufacturer to start-up the system. Technicians, as required, shall be factory trained and experienced in the work they perform. (Contractor startup is unacceptable.)

B. The technicians shall utilize comprehensive report forms to document results. Sample forms shall be submitted for review prior to commencing work.

C. Upon completion of the work, the report forms shall be signed by the technicians and their supervisor and included in the final report and Owner's manual.

D. Submit four copies of the final report to the Architect/Engineer for approval within 10 working days of start-up.

E. Follow the manufacturer's start-up procedures.
1. Verify interlocks.
2. Test and verify operation of safety controls.
3. Calibrate controls.
4. Verify microprocessor based control operation.
5. Test, calibrate, and set the chilled water temperature controls.
6. Verify chilled water temperature reset sequence.
7. Verify operation of the integrated control panel.

F. Measure and record the following data:
1. Chilled water entering/leaving temperature.
2. Chilled water flow through the chiller.
3. Suction pressure/condensing pressure.
4. Suction pressure/unloading steps.
5. Air entering/leaving condenser; dry bulb temperature.
6. Outdoor ambient; dry bulb.
7. Motor nameplate voltage; phase and full load amperes.

8. Heater coil in starter (as applicable)
    a. Rating in amperes.
    b. Manufacturer's recommendation.
9. Power reading (voltage and amperes of legs at motor terminals).

G. Test and calibrate the operation of the electronic ground current sensing devices.

H. If the system has been shipped with a holding charge, provide the following:
1. Leak test.
2. Refrigerant pressure test.
3. Evacuate, dehydrate and charge.

I. Verify that accessories are installed and performing the specified functions. Insert certification in Owner's manual.

J. Instruct the Owner's operating personnel. Provide Owner with 8 hours of training prior to substantial completion.

K. Do not operate the equipment for any reason until the factory start-up service has been completed.

L. Provide a printout from the unit microcomputer control system showing the correct operation of all system controls and components.

M. Provide minimum 24-hour history log displaying accuracy of temperature control system in 15-minute intervals and documented number of compressor cycles during the 24-hour period.

END OF SECTION

SECTION 26 01 05

ELECTRICAL OPERATING AND MAINTENANCE MANUALS

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Compile electrical product data and related information appropriate for Owner's operation and maintenance of products furnished under Contract. Prepare electrical operating and maintenance data as specified in this Section and as referenced in other sections of specifications.

B. Instruct Owner's personnel in operation and maintenance of equipment and systems.

C. Submit 3 copies of complete manual in final form.

1.2 ELECTRICAL OPERATING AND MAINTENANCE MANUAL SUBMITTAL SCHEDULE

A. Thirty (30) days after receipt of reviewed submittals bearing the Architect / Engineer's stamp of acceptance (including re-submittals), submit for review 1 copy of the first draft of the Electrical Operating and Maintenance Manual. This copy shall contain as a minimum:
   1. Table of Contents for each element
   2. Contractor information
   3. All shop drawings, coordination drawings and product data, bearing the Architect / Engineer's stamp of acceptance.
   4. All parts and maintenance manuals for items of equipment
   5. Warranties (without starting dates)
   6. Certifications that have been completed; submit forms and outlines of certifications that have not been completed
   7. Operating and maintenance procedures.
   8. Form of Owner's Training Program Syllabus (including times and dates)
   9. Control operations / equipment wiring diagrams
   10. Coordination Drawings
   11. Schedule of Lamps, Light Engines
   12. Schedule of Ballasts and Drivers
   13. Schedule of Fuses
   14. Other required operating and maintenance information that are complete.

B. Copy will be returned to the Contractor within 15 days with comments for corrections.

C. Submit the (3) completed manuals in final form to the Architect / Engineer.
   1. Prior to substantial completion for Owner's use after the Owner accepts facility maintenance.
   2. Include all specified data, test reports, drawings, dated warranties, certificates, along with other materials and information.

D. The Architect / Engineer shall review the manuals for completeness within 15 days.

E. The Contractor shall be notified of any missing or omitted materials. The Manuals shall be reworked by the Contractor, as required, in the office of the Architect / Engineer. The manuals will not be retransmitted.

F. Three complete manuals shall be delivered to the Owner prior to substantial completion.

PART 2 - PRODUCTS

2.1 BINDERS

A. Commercial quality black, 3-ring binders with clear, durable, cleanable plastic covers.

B. Minimum ring size: 1"; Maximum ring size: 3".

C. When multiple binders are used, correlate the data into related groupings.

D. Label contents on spine and face of binder with full size insert. Label under plastic cover.

PART 3 - EXECUTION

3.1 ELECTRICAL OPERATION AND MAINTENANCE MANUAL

A. Form for Manuals:
1. Prepare data in form of an instructional manual for use by Owner's personnel.
2. Format:
a. Size: 8-1/2" x 11"
b. Text: Manufacturer's printed data or neatly typewritten.
3. Drawings:
a. Provide reinforced punched binder tab and bind in text.
b. Fold larger drawings to size of text pages.
4. Provide flyleaf indexed tabs for each separate product or each piece of operating equipment.
5. Cover: Identify each volume with typed or printed title "Operating and Maintenance Instructions". List:
a. Title of Project
b. Identity of separate structures as applicable
c. Identity of general subject matter covered in the manual.
6. Binder as specified

B. Content of Manual:
1. Neatly typewritten Table of Contents for each volume arranged in systematic order as outlined in the specifications.
a. Contractor, name of responsible principal, address and telephone number
b. A list of each product required to be included, indexed to content of the volume.
c. List with each product, name, address and telephone number of:
1) Subcontractor or installer
2) Maintenance contractor as appropriate
3) Identify area of responsibility of each.
4) Local source of supply for parts and replacement
d. Identify each product-by-product name and other identifying symbols as set forth in Contract Documents.
2. Product Data:
a. Include those sheets pertinent to the specific product.
b. Annotate each sheet to:
1) Identify specific product or part installed.
2) Identify data applicable to installation.
3) Delete references to inapplicable information.
3. Drawings:
a. Supplement product data with drawings as necessary to illustrate:
1) Relations of component parts of equipment and systems
2) Control and flow diagrams
b. Coordinate drawings with information in Project Record Documents to assure

correct illustration of completed installation.

c. Do not use Project Record Documents as maintenance drawings.

4. Written text as required to supplement product data for the particular installation:
   a. Organize in consistent format under separate headings for different procedures.
   b. Provide logical sequence of instructions for each procedure.
5. Copy of each warranty, bond and service contract issued
   a. Provide information sheet for Owner's personnel, giving:
      1) Proper procedures in event of failure
      2) Instances that might affect validity of warranties or bonds
6. Shop drawings, coordination drawings and product data as specified.

C. Sections for Equipment and Systems
1. Content for each unit of equipment and system as appropriate:
   a. Description of unit and component parts:
      1) Function, normal operating characteristics, and limiting conditions.
      2) Performance curves, engineering data and tests.
      3) Complete nomenclature and commercial number of replaceable parts.
   b. Operating procedures:
      1) Start up, break-in, routine / normal operating instructions
      2) Regulation, control, stopping, shut down and emergency instructions
      3) Summer and winter operating instructions
      4) Special operating instructions
   c. Maintenance procedures:
      1) Routine operations
      2) Guide to trouble-shooting
      3) Disassembly, repair and reassembly
      4) Alignment, adjusting and checking
      5) Routine service based on operating hours
   d. Servicing and lubrication schedule
      1) List of lubricants required
   e. Manufacturer's printed operating and maintenance instructions.
   f. Copies of typed circuit directories of panel board to reflect actual room graphics numbers and room names (not architectural room numbers from the drawings).
      1) Electrical
      2) Controls
      3) Communications
   g. Original manufacturer's parts list, illustrations, assembly drawings and diagrams required for maintenance.
      1) Predicted life of part subject to wear
      2) Items recommended to be stocked as spare parts
   h. Schedule of fuses
   i. Complete equipment field accessible internal wiring diagrams
   j. Schedule of lamps
   k. Schedule of ballasts
   l. Each Contractor's coordination drawings
   m. List of original manufacturer's spare parts and recommended quantities to be maintained in storage
   n. Other data as required under pertinent sections of the specifications
2. Prepare and include additional data when the need for such data becomes apparent during instruction of Owner's personnel.
3. Additional requirements for operating and maintenance data as outlined in respective sections of specifications
4. Provide complete information for products specified in Division 26.
5. Provide certificates of compliance as specified in each related section.
6. Provide start up reports as specified in each related section.
7. Provide signed receipts for spare parts and material.

8. Provide training report and certificates.

END OF SECTION

SECTION 26 05 00

ELECTRICAL GENERAL PROVISIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Except as modified in this Section, General Conditions, and Supplementary Conditions, applicable provisions of Division 1 General Requirements, and other provisions and requirements of the Contract Documents apply to work of Division 26 Electrical.

B. Applicable provisions of this section apply to all sections of Division 26, Electrical.

1.2 CODE REQUIREMENTS AND FEES

A. Perform work in accordance with applicable statutes, ordinances, codes and regulations of governmental authorities having jurisdiction.

B. Electrical work shall comply with applicable inspection services:
1. Underwriters Laboratories
2. National Fire Protection Association
3. State Health Department
4. Local Municipal Building Inspection Department adopted codes with amendments
5. National Electrical Code with local amendments
6. State Regulatory Agencies
7. Where the project is located outside a municipal jurisdiction, and has no municipal inspection services, the National Electrical Code with amendments of the municipality with extraterritorial jurisdiction shall govern.
8. Where the project is located outside any municipal jurisdiction, including extraterritorial jurisdictions, the National Electrical Code with local adopted amendments of the largest municipality located in the same county or parish shall govern.
9. International Energy Conservation Code
10. National Electrical Safety Code

C. Resolve any code violations discovered in contract documents with the Engineer prior to award of the contract. After Contract award, any correction or additions necessary for compliance with applicable codes shall be made at no additional cost to the Owner.

D. This Contractor shall be responsible for being aware of and complying with asbestos NESHAP regulations, as well as all other applicable codes, laws and regulations.

E. Obtain all permits required.

1.3 CONTRACTOR'S QUALIFICATIONS

A. An approved contractor for the work under this division shall be:
1. A specialist in this field and have the personnel, experience, training, and skill, and the organization to provide a practical working system.
2. Able to furnish evidence of having contracted for and installed not less than 3 systems of comparable size and type that has served their Owners satisfactorily for not less than 3 years.

1.4 REFERENCE SPECIFICATIONS AND STANDARDS

A. Materials which are specified by reference to Federal Specifications; ASTM, ASME, ANSI, APWA, or AWWA Specifications; Federal Standards; or other standard specifications must comply with latest editions, revisions, amendments or supplements in effect on date proposals are received. Referenced specifications and standards are minimum requirements for all equipment, material and work. In instances where specified capacities, size or other features of equipment, devices or materials exceed these minimums, meet specified capacities.

B. Use electrical materials and equipment that is constructed and tested in accordance with the standards of NEMA, ANSI, ASTM, or other recognized commercial standard. If materials and equipment is labeled, listed, or recognized by any Nationally-Recognized Testing Laboratory (NRTL) acceptable to the Occupational Safety and Health Administration (OSHA), then provide NRTL-labeled, listed, or recognized material and equipment. Acceptable NRTLs include but are not limited to:
   1. Underwriters Laboratories, Inc. (UL)
   2. Factory Mutual Research Corp. (FMRC) (also referred to as "Factory Mutual Global," or "FM Global")
   3. Intertek Testing Services NA, Inc. (ITSNA, formerly ETL)
   4. Canadian Standards Association (CSA)
   5. A complete listing of acceptable NRTLs is published on the OSHA website at http://www.osha.gov/dts/otpca/nrtl/.

C. Where material and equipment is not labeled, listed, or recognized by any NRTL, provide a manufacturer's Certificate of Compliance indicating complete compliance of each item with applicable standards of NEMA, ANSI, ASTM, or other recognized commercial standard.

D. Do not install or use electrical material or equipment for any use other than that for which it was designed, labeled, listed, or identified unless formally approved for such use by the Owner's AHJ. This *National Electrical Code*® requirement is re-stated for emphasis.

E. Codes and Standards applicable to this Division:
   1. ANSI – American National Standards Institute
      a. ANSI Z535.1, Safety Colors
      b. ANSI Z535.2, Environmental and Facility Safety Signs
      c. ANSI Z535.3, Criteria for Safety Symbols
      d. ANSI Z535.4, Product Safety Signs and Labels
   2. ASHRAE – American Society of Heating, Refrigeration, and Air Conditioning Engineers:
      a. ASHRAE Standard 90.1, *Energy Standards for Buildings Except for Low Rise Residential Buildings [ANSI, IESNA]*
   3. ASTM – American Society for Testing and Materials
   4. CBM – Certified Ballast Manufacturers
   5. ICC – International Code Council
      a. International Building Code® (IBC)
      b. International Existing Building Code® (IEBC)
   6. ICEA – Insulated Cable Engineers Association
      a. ICEA S-93-639, *Shielded Power Cables 5-46kV* (NEMA WC-74)
   7. IEEE® - Institute of Electronics and Electrical Engineers
      a. IEEE C2™, *National Electrical Safety Code* (NESC) [ANSI]
      b. IEEE Std 141™, *Recommended Practice for Electric Power Distribution for Industrial Plans* ("Red Book")
      c. IEEE Std 143™, *Recommended Practice for Grounding of Industrial and Commercial Power Systems* ("Green Book")
      d. IEEE Std 241™, *Recommended Practice for Electric Power Systems in Commercial Buildings* ("Gray Book")

e. IEEE Std 242 ™, *Recommended Practice for Protection and Coordination of Industrial and Commercial Power Systems* (“Buff Book”)
f. IEEE Std 315 ™, *Graphic Symbols for Electrical and Electronics Diagrams*
g. IEEE Std 399 ™, *Recommended Practice for Power Systems Analysis* (“Brown Book”)
h. IEEE Std 446 ™, *Recommended Practice for Emergency and Standby Power Systems for Industrial and Commercial Applications* (“Orange Book”)
i. IEE Std 493 ™, *Recommended Practice for the Design of Reliable Industrial and Commercial Power Systems* (“Gold Book”)
j. IEEE Std 519 ™, *Recommended Practices and Requirements for Harmonic Control in Electrical Power Systems*
k. IEEE Std 739 ™, *Recommended Practice for Energy Management in Industrial and Commercial Facilities* (“Bronze Book”)
l. IEEE Std 902 ™, *Guide for Maintenance, Operation , and Safety of Industrial and Commercial Power Systems* (“Yellow Book”)
m. IEEE Std 1015 ™, *Recommended Practice Applying Low-Voltage Circuit Breakers Used in Industrial and Commercial Power Systems* (“Blue Book”)
n. IEEE Std 11oo ™, *Recommended Practice for Powering and Grounding Electronic Equipment* (“Emerald Book”)
o. IEEE Std 1584 ™, *Guide for Performing Arc-Flash Hazard Calculations*

8. IESNA – Illuminating Engineering Society of North America
   a. IESNA *Lighting Handbook*, Ninth Edition
   b. IESNA RP-1, *American National Standard Practice for Office Lighting*
   c. IESNA RP-7, *American National Standard Practice for Lighting Industrial Facilities*
9. NECA – National Electrical Contractors Association:
   a. NECA 1, *Good Workmanship in Electrical Construction* [ANSI]
   b. NECA 90, *Recommended Practice for Commissioning Building Electrical Systems* [ANSI]
   c. NECA 100, *Symbols for Electrical Construction Drawings* [ANSI]
   d. NECA 101, *Standard for Installing Steel Conduits (Rigid, IMC, EMT)* [ANSI]
   e. NECA 104, *Recommended Practice for Installing Aluminum Building Wire and Cable* [ANSI]
   f. NECA / NEMA 105, *Recommended Practice for Installing Metal Cable Tray Systems* [ANSI]
   g. NECA 111, *Standard for Installing Nonmetallic Raceways (RNC, ENT, LFNC)* [ANSI]
   h. NECA / NACNA 120, *Standard for Installing Armored Cable (Type AC) and Metal-Clad Cable (Type MC)*[ANSI]
   i. NECA 202, *Recommended Practice for Installing and Maintaining Industrial Heat Tracing Systems* [ANSI]
   j. NECA 230, *Standard for Selecting, Installing and Maintaining Electric Motors and Motor Controllers* [ANSI]
   k. NECA 331, *Standard for Building and Service Entrance Grounding and Bonding*
   l. NECA 400, *Standard for Installing and Maintaining Switchboards* [ANSI]
   m. NECA 402, *Standard for Installing and Maintaining Motor Control Centers* [ANSI]
   n. NECA / EGSA 404, *Standard for Installing Generator Sets* [ANSI]
   o. NECA 407, *Recommended Practice for Installing and Maintaining Panelboards* [ANSI]
   p. NECA 408, *Recommended Practice for Installing and Maintaining Busways* [ANSI]
   q. NECA 409, *Recommended Practice for Installing and Maintaining Dry-Type Transformers* [ANSI]

r. NECA 410, *Recommended Practice for Installing and Maintaining Liquid-Filled Transformers* [ANSI]
s. NECA 411, *Recommended Practice for Installing and Maintaining Uninterruptible Power Supplied (UPS)* (ANSI]
t. NECA 420, *Standard for Fuse Applications* [ANSI]
u. NECA 430, *Standard for Installing Medium-Voltage Metal-Clad Switchgear* [ANSI]
v. NECA / IESNA 500, *Recommended Practice for Installing Indoor Lighting Systems* [ANSI]
w. NECA / IESNA 501, *Recommended Practice for Installing Exterior Lighting Systems* [ANSI]
x. NECA / IESNA 502, *Recommended Practice for Installing Industrial Lighting Systems* [ANSI]
y. NECA / MACSCB 600, *Recommended Practice for Installing and Maintaining Medium-Voltage Cable* [ANSI]
z. NECA / NEMA 605, *Installing Underground Nonmetallic Utility Duct* [ANSI]

10. NEMA – National Electrical Manufacturers Association
11. NETA – International Electrical Testing Association, Inc.:
    a. NETA ATS, *Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems*
    b. NETA MTS, *Maintenance Testing Specifications for Electrical Power Distribution Equipment and Systems*
    c. NETA ETT, *Standard for Certification of Electrical Testing Technicians* [ANSI]
12. NFPA – National Fire Protection Association:
    a. NFPA 20®, *Standard for the Installation of Stationary Pumps for Fire Protection®*
    b. NFPA 70™, *National Electrical Code® (NEC®)*
    c. NFPA 70E, *Standard for Electrical Safety in the Workplace.*
    d. NFPA 101®, Life Safety Code®
    e. NFPA 110, *Standard for Emergency and Standby Power Systems*
    f. NFPA 111, *Standard on Stored Electrical Energy Emergency and Standby Power Systems*
    g. NFPA 780, *Standard for the Installation of Lightning Protection Systems*
    h. All other NFPA codes and standards except NFPA 5000
13. OSHA – Occupational Safety and Health Administration
14. IECC – International Energy Conservation Code
15. ISO – International Organization for Standardization
16. State and Local Energy Conservation Code
17. Applicable County and Municipal Codes

1.5 CONTRACT DRAWINGS

A. Contract drawings are diagrammatic only and do not give fully dimensioned locations of various elements of work. Determine exact locations from field measurements.

B. Every effort has been made by the Engineer to indicate wiring of all receptacles, light fixtures, switches, telephone outlets, HVAC equipment, other equipment, elevator equipment, and all other devices / appliances requiring electrical power. It is the intent of the Engineer that all light fixtures be powered and controlled unless specifically noted on the plans; that all wiring devices (receptacles and direct connected equipment) be circuited to a power source of the correct voltage and that all HVAC, elevator equipment and other equipment be properly wired to the correct voltage power source; that all communications and security systems devices and equipment and all fire alarm system devices and equipment are installed, wired and systems are fully operational.

C. It is the responsibility of the Contractor to review the construction drawings (reflected ceiling plans) for light fixtures, casework elevation details for electrical devices which are not indicated on the electrical drawings; to review the mechanical and plumbing documents and all other drawings to determine the electrical rough-ins for all equipment requiring power connections, and to include in their proposals the correct and complete electrical rough-ins for all of these items which were inadvertently not indicated on the electrical drawings, OR the Contractor shall specifically enumerate each item requiring electrical rough-in which is not specifically shown on the electrical drawings, and indicate the electrical provisions of these items as specifically excluded from his proposal.

D. It is the responsibility of the Contractor to compare the scale of all electrical drawings with the scale of the architectural drawings and make adjustments to all electrical drawings which have the incorrect drawing scale so that his material takeoffs are not in error due to an incorrectly labeled drawing scale and his proposal is complete.

E. No proposal shall be accepted which specifically excludes any of the provisions of paragraphs B, C, or D above.

1.6 PROJECT RECORD DOCUMENTS

A. Maintain at the job site a separate set of white prints (black line) of the contract drawings for the sole purpose of recording the "as-built" changes and diagrams of those portions of work in which actual construction is significantly at variance with the contract drawings. Mark the drawings with a colored pencil. Prepare, as the work progresses and upon completion of work, reproducible drawings clearly indicating locations of various major and minor feeders, equipment, and other pertinent items, as installed. Record underground and under slab service and feeders installed, dimensioning exact location and elevation of such installations.

B. At conclusion of project, obtain without cost to the Owner, electronic PDF and AutoCAD 2014 and / or Revit CAD files of the original drawings and transfer as-built changes to these. Provide the following as-built documents including all contract drawings regardless of whether corrections were necessary and include in the transmittal: “2 sets of CDs and prints for Owner’s use, one set of CDs, prints, and mylars for Architect / Engineers Records”. Delivery of these as-built electronic, reproducibles and prints is a condition of final acceptance.
   1. 3 sets of electronic AutoCAD (2014 dwg) and / or Revit CAD drawing files, on CD-ROM media, of each contract as-built drawing.
   2. One reproducible Dayrex Mylar film positive of each contract as-built drawing.
   3. Three sets of blue-line prints of each contract as-built drawing.
   4. Three sets of pdf prints of each contract as-built drawing on CD.

C. As-Built Drawings should indicate the following information as a minimum:
   1. Indicate all addendum changes to documents.
   2. Remove Engineer’s Seal, name, address, and logo from drawings.
   3. Mark documents RECORD DRAWINGS.
   4. Clearly indicate: DOCUMENT PRODUCED BY:
   5. Indicate all changes to construction during construction. Indicate actual routing of all conduits, etc. that was deviated from construction drawings.
   6. Indicate exact location of all underground electrical raceways, and elevations.
   7. Correct schedules to reflect (actual) equipment furnished and manufacturer.
   8. During the execution of work, maintain a complete set of Drawings and specifications upon which all locations of equipment, devices, and all deviations and changes from the construction documents in the work shall be recorded.
   9. Exact location of all electrical equipment in building. Label panel schedules to indicate actual location.
   10. Exact location of all electrical equipment in and outside of the building.

11. Exact location of all outdoor lighting poles and equipment.
12. Location, size and routing of all feeder conduits, equipment, etc. shall be accurately and neatly shown to dimension.
13. Exact location of all roof mounted equipment, wall, roof and floor penetrations.
14. Cloud all changes.
15. Update all panel schedules with all additional circuits added or deleted through construction. Identify each circuit to include all information specified for directory cards for circuit identification in panelboards.

1.7 SPACE REQUIREMENTS

A. Consider space limitations imposed by contiguous work in selection and location of equipment and material. Do not provide equipment or material that is not suitable in this respect.

1.8 RELATION WITH OTHER TRADES

A. Carefully study all matters and conditions concerning the project. Submit notification of conflict in ample time to prevent unwarranted changes in any work. Review other Divisions of these specifications to determine their requirements. Extend electrical services and final connections to all items requiring same.

B. Because of the complicated relationship of this work to the total project, conscientiously study the relation and cooperate as necessary to accomplish the full intent of the documents.

C. Provide sleeves and inserts in forms as required for the work. Stub up and protect open ends of pipe before any concrete is placed. Furnish sizes of required equipment pads. Furnish and locate bolts and fittings required to be cast in them.

D. Locate and size openings required for installation of work specified in this Division in sufficient time to prevent delay in the work.

E. Refer to other Divisions of the specifications for the scope of required connections to equipment furnished under other Division. Determine from the General Contractor / Construction Manager for the various trades, the Owner, and by direction from the Architect / Engineer, the exact location of all items. The construction trades involved shall furnish all roughing-in drawings and wiring diagrams required for proper installation of the electrical work.
1. Make final electrical connections to all electrically operated equipment indicated on the drawings, except as noted.
2. The responsibility for alignment of motor and driven equipment is specified in the related division.

F. Request all Shop Drawings required in ample time to permit proper installation of all electrical provisions.

G. Extend services as indicated to the various items of equipment furnished by others. Rough-in for the various items and make final connections ready for operation upon placing of the equipment.

1.9 CONCEALED AND EXPOSED WORK

A. When the word "concealed" is defined as hidden from sight as in chases, furred spaces or above ceilings. "Exposed" is defined as open to view, in plain sight.

1.10 GUARANTEE

A. Guarantee work for 1 year from the date of substantial completion of the project. During that period make good any faults or imperfections that may arise due to defects or omissions in material, equipment or workmanship. Replacement of failed parts or equipment shall be provided.

1.11 MATERIAL AND EQUIPMENT

A. Furnish new and unused materials and equipment meeting the requirements of the paragraph specifying acceptable manufacturers. Where two or more units of the same type or class of equipment are required, provide units of a single manufacturer.

1.12 NOISE AND VIBRATION

A. Select equipment to operate with minimum noise and vibration. If noise or vibration is produced or transmitted to or through the building structure by equipment, piping, ducts or other parts of work, and judged objectionable by the Owner, Architect, or Engineer, rectify such conditions at no additional cost to the Owner. If the item of equipment is judged to produce objectionable noise or vibration, demonstrate at no additional cost that equipment performs within designated limits on a vibration chart.

1.13 ACCEPTABLE MANUFACTURERS

A. Manufacturers names and catalog number specified under sections of Division 26 are used to establish standards of design, performance, quality and serviceability and not to limit competition. Equipment of similar design, materials, energy efficiency characteristics (where applicable) and lighting performance characteristics (where applicable) equal to that specified, manufactured by a named manufacturer shall be acceptable on approval. A request for prior approval of equipment not listed must be submitted ten (10) days before proposal due date. Submit a marked-up set of the relevant specification section indicating all variances, a comparison to the specified product, and of construction and performance criteria, complete design and performance data for the specified product and the proposed substitution for comparison to the Engineer. The Architect issues approvals of acceptable manufacturers as addenda to the Construction Proposal Documents.

1.14 UTILITIES, LOCATIONS AND ELEVATIONS

A. Locations and elevations of the various utilities included within the scope of this work:
   1. Obtained from utility maps and other substantially reliable sources.
   2. Are offered separate from the Contract Documents as a general guide only without guarantees to accuracy.

B. Examine the site and verify the location and elevation of all utilities and of their relation to the work. Existing utilities indicated on the site plans are for reference only and shall be field verified by the Contractor with the respective public or private utility.

1.15 OPERATING TESTS

A. After all electrical systems have been completed and put into operation, subject each system to an operating test under design conditions to ensure proper sequencing and operation throughout the range of operation. Tests shall be made in the presence of the Architect / Engineer and Owner. Provide minimum 24-hour advance notice of scheduling of all tests. Make adjustments as required to ensure proper functioning of all systems. Special tests on individual systems are specified under individual sections. Submit 3 copies of all certifications and test reports adequately in advance of completion of the work to allow for remedial action as required to correct deficiencies discovered in equipment and systems.

1.16 WARRANTIES

A. All normal and extended warranties shall include parts, labor, miscellaneous materials, travel time, incidental expenses, normal freight / shipping, refrigerant, oils, lubricants, belts, filters and any expenses related to service calls required to diagnose and correct warranty problems.

B. Manufacturer's warranty shall be from one year from date of substantial completion. Contractor shall be responsible for extending the warranties regardless of date of installation or commissioning.

C. Submit 3 copies of all warranties and guarantees for systems, equipment, devices and materials. These shall be included in the Operating and Maintenance Manuals.

1.17 BUILDING CONSTRUCTION

A. It shall be the responsibility of the sub-contractor to consult the Contract Drawings, details and specifications and thoroughly familiarize himself as to the construction and all job related requirements. All construction trades shall cooperate with the General Contractor / Construction Manager Job site superintendent and lay out work so that all raceways and other items are placed in the walls, furred spaces, chases, etc., so that there shall be no delay in the job.

1.18 TEMPORARY FACILITIES

A. General: Refer to Division 1 for general requirements on temporary facilities.

B. Temporary Wiring: Temporary power and lighting for construction purposes shall be provided under this Division. Installation of temporary power shall be in accordance with NEC Article 527.

C. Temporary facilities, wire, lights and devices are the property of this Contractor and shall be removed by this Contractor at the completion of the Contract.

PART 2 - PRODUCTS – NOT USED

PART 3 - EXECUTION

3.1 IDENTIFICATION OF EQUIPMENT

A. Identification of Equipment:
1. All major equipment shall have a manufacturer's label identifying the manufacturer's address, equipment model and serial numbers, equipment size, and other pertinent data. Take care not to obliterate this nameplate. The legend on all nameplates or tags shall correspond to the identification shown on the Operating Instructions. All panels, cabinets, or equipment requiring 120 volt or higher power shall be labeled as required which includes circuit designation and circuit panelboard location, regardless of which discipline installs the equipment.
2. Three layer laminated plastic engraved identifying nameplate shall be permanently secured to each switchboard, distribution panel, motor control center, transformer, panelboard, safety disconnect switch, enclosed circuit breaker, transfer switches, remote generator transfer deices not installed inside light fixtures, wireway, busduct plug, terminal cabinet, surge protective device, capacitor, individual motor controller, contactor, fire alarm panels (main and remote booster), and communications (voice, data, video) cabinet or rack, security panels, time clocks, BMCS cabinets, sound reinforcement cabinets and racks, miscellaneous control cabinets, equipment integral disconnect switches, toggle or motor switches, disconnects for equipment, exterior junction boxes, exterior pull boxes, exterior wireways and gutters, and rooftop equipment (i.e.: supply and exhaust fans, rooftop HVAC equipment) with stainless steel screws.

a. Utility Power: White letters on black background
Generator Power (White letters on red background
UPS Power: White letters on blue background
Load Bank Circuits: White letters on green background
Solar or Wind Power Generation: White on orange background

b. Identifying nameplates shall have 1/2-inch high, engraved letters for equipment designation and ¼-inch letters indicating source circuit designation, (i.e.: "PANEL HA –fed from MDP-6 located in Mech. Rm. 100"). The words "fed from" and "located" shall be included in the labeling.

Example: Panel HA
Fed From MSB
Located Main Elec. RM 100

Example: Disconnect for Panel LK
Location: Kitchen
Fed From Transformer TLK
Located Main Elec. RM 100

c. Each switchboard, distribution panel, transfer switch, generator transfer device (GTD) for emergency lighting, and motor control center feeder or branch circuit device shall have a nameplate showing the load and location of load served in ¼-inch high, engraved letters. Circuit breaker name and kirk key designation if applicable

d. Each section of multiple section panelboards shall also indicate panelboard section number (i.e.: Panel "HA-Section 2 – fed from MDP-6 located in Mech. Rm. 100")

e. Motor Controllers, starters, and contactors: Provide neatly typed label inside each motor controller and contactor enclosure door identifying motor or load served, nameplate horsepower, full load amperes, code letter, service factor, and voltage / phase rating.

f. Individual motor controller and contactor nameplates shall include load served, location of load served, panel and circuit numbers serving load, location of panel serving load, panel and circuit number serving control circuit, location of panel serving control circuit (if different from panel serving load), description and location (if applicable) of control controlling contactor (i.e. Controlled: Switch in RM 100, and Controlled: BMCS). Contactor nameplate is to include whether it is a lighting or receptacle contactor and name of contactor. i.e. C-1.

Lighting Contactor Example	Receptacle Contactor Example
Lighting Contactor C1 West Parking Lot Pole Lights Fed From Panel HA-2,4,6 Located Main Elec. Rm. 100 Control Circuit-Panel LA 42 Located Main Elec. Rm. 100 Controlled-BMCS	Receptacle Contactor C2 Table Recpts Lab Rm 100 Fed From Panel LA-2,4,6,8 Located Mech. Rm. 110 Control Circuit-Panel LA-42 Controlled-Emer Shut Off Mushroom Switch Rm 101
GTD Example	
Exterior lighting wall packs / north soffit / west metal canopy Fed from Panels EHA-2 located in Elec. RM 105 and HA-1 via Lighting Contactor controlled by BMCS located in Elec. RM 200.	

g. Exterior J-boxes, pull boxes, and gutters shall have panel identification, circuit numbers, and location of panel listed on name plate. Low voltage shall be identified per contents, examples: DATA, BMCS, F/A

h. Name plates on equipment served from switchboards, distribution panels, I-Line panels, and motor control centers are not to include circuit numbers shown on drawings as the circuit numbers are for construction drawing purposes only.

i. Panel names for 277/480v shall start with the letter “H” and 120/208v, 120/240v shall start with the letter “L”. No panel shall be named to include a number other than multi sectional panels, example HA-section 2. New panels installed in renovation or site additions shall have names approved or designated by Owner’s electrical representative. Panel names shall not include the letter “I”. Transformer names shall start with the letter “T” followed by the panel name it serves, i.e. TLA.

j. Main service ATS label shall include equipment name, emergency source and location, normal power source and location, panel served and location. Wall mounted ATS serving lighting loads shall include type of lighting and location, emergency panel and circuit ID and location of panel, normal panel and circuit ID and location of panel.

Main Service ATS Example	Wall Mounted Lighting ATS Example
ATS-1	ATS
Emer Power-Emer Generator	Exterior Wall Packs/Soffit Lights
Located Chiller Yard	North/West Metal Canopy Lights
Normal Power-MSB	Fed from EHA-2
Located-Mech Rm 100	Located Mech Rm 200
Serves Panel EHA	Fed From HB-4
Located-Mech Rm 100	Located Mech Rm 150

k. Name plates shall include rated bus amperage, voltage, number of phases, number of wires and type of essential electrical system as applicable.

l. Switchgear, switchboards, panelboards, motor control centers, or service equipment available fault current labeling: Provide a 2x3 inch permanently affixed (notice) label with white lettering on contrasting blue background permanently affixed to the equipment prior to energizing the equipment. The label shall include the date of installation and the date of calculation and comply with ANSI Z535.4 current standards design and durability. The date of calculation shall be the date indicated by the Engineer of Record’s seal on the Construction Documents. Example:

AVAILABLE FAULT CURRENT: ##, ### AMPS
DATE OF INSTALLATION: MM/DD/YY
DATE OF CALCULATION: MM/DD/YY

3. Cardholders and directory cards shall be furnished for circuit identification in panelboards. Cardholder shall be located on inside of panel door and shall be in a metal frame with clear plastic front. Circuit lists shall be typewritten. Circuit descriptions shall include explicit description and identification of items controlled by each individual breaker, including final graphics room number or name designation and name of each item served. If no building appointed room number or name is given, list locations per the following examples – A. Storage in Rm 100 – B. Office in Rm 100 – C. Storage west of Rm. 100. List corridors as “corridors”. Identify circuits controlled by contactors using a separate notation for each contactor used. List notation at bottom of schedule stating the circuits are controlled by a contactor, list exact location of contactor, and how switched. Do not use architectural room number designation shown on plans. Obtain final graphics room number identification from Architect’s final room number graphics plan. All locations served by breakers shall be listed on schedule. Panel schedule shall be large enough to contain all information required. Also refer to Section 26 24 16.

4. Permanent, waterproof, black markers shall be used to identify each lighting and power grid junction box, gutter and wireway. Clearly indicate the panel and branch circuit numbers available at that junction box, gutter or wireway. Where low voltage relay panels

are used for lighting control, identify the low voltage relay panel and number in addition to the branch circuit panel and number.

5. Pull Boxes, Transformers, Disconnect Switches, etc.: Field work each with a name plate showing identity, voltage and phase and identifying equipment connected to it. The transformer rating shall be shown on the panels or enclosures. For an enclosure containing a motor starter, the nameplate shall include the Owner's motor number, motor voltage, number of motor phases, motor load being serviced, motor horsepower, and motor full load current. Nameplates shall also indicate where panel is fed from.

B. Prohibited Markings: Markings intended to identify the manufacturer, vendor, or other source from whom the material has been obtained are prohibited for installation in public, tenant, or common areas within the project. Also prohibited are materials or devices that bear evidence that markings or insignias have been removed. Certification, testing (example, Underwriters Laboratories), and approval labels are exceptions to this requirement.

C. Warning Signs: Provide warning signs where there is hazardous exposure associated with access to or operation of electrical facilities. Provide text of sufficient size to convey adequate information at each location; mount permanently in an appropriate and effective location. Comply with industry standards for color and design.

D. Wire and Cable Markers: Provide vinyl cloth markers with split sleeve or tubing type, except in manholes provide stainless steel with plastic ties.

E. Wire and Cable Labeling: Provide wire markers on each conductor in all boxes, pull boxes, gutters, wireways, contactors, and motor controllers and load connection. Identify with panelboard / switchboard branch circuit or feeder number for power and lighting circuits, and with control wire number as indicated on equipment manufacturer's shop drawings for control wiring.

F. Underground Warning Tape: Thomas and Betts or approved equal. Six-inch wide plastic tape, colored red for 50 volts or above electrical, or orange for communications and control with suitable warning legend describing buried electrical lines; telephone lines and data lines per APWA recommendations. All underground electrical conduits shall be so identified. Tape shall be buried at a depth of 6-inches below grade and directly above conduits or ductbanks. Provide magnetic marking tape below all underground electrical conduits.

G. Lighting Controls and Equipment: Provide self-adhesive machine typed tape labels with ¼" high white letters on ½" tall black background for digital lighting modules as "DLM". Modules or relays located above ceiling: adhere label to bottom of ceiling T-grid below relay location. Modules or relays located in mechanical or electrical rooms or other areas other than above ceiling: Adhere label to the cover of the module or relay and identify the area they control as "MAIN GYM", "BAND HALL", or "CORRIDOR 100", etc. Remote lighting control switches or push button stations located remotely from the area they control: Adhere label to device face plate, not obstructing screw fasteners, and intuitively identify function such as "GYM LTG LOW-HIGH" or "CAFE LTG DIM", etc.

3.2 CUTTING AND PATCHING

A. General: Comply with the requirements of Division 1 for the cutting and patching of other work to accommodate the installation of electrical work. Except as authorized by the Architect / Engineer, cutting and patching of electrical work to accommodate the installation of other work is not permitted.

3.3 INSTRUCTION OF OWNER'S PERSONNEL

A. Prior to substantial completion, conduct an on-site training program to instruct Owner's operating personnel in the operation and maintenance of the electrical systems.
   1. Provide the training during regular working day.
   2. The Instructors shall be experienced in their phase of operation and maintenance of the electrical systems and with the project.
   3. Refer to other specification sections for additional training and commissioning requirements.

B. Time to be allocated for instructions.
   1. Minimum of 10 hours dedicated instructor time
   2. 1 hours on each of 10 days
   3. Additional instruction time for specific systems as specified in other Sections.

C. Before on-site training, submit the program syllabus; proposed time and dates; for review and approval, minimum 48 hours prior to proposed training time and date.
   1. One copy to the Owner
   2. One copy to the Architect / Engineer

D. The Owner shall provide a list of personnel to receive instructions, and shall coordinate their attendance at the agreed upon times.

E. Use operation and maintenance manuals as the basis of instruction. Review manual with personnel in detail. Explain all aspects of operation and maintenance.

F. Demonstrate start-up, operation, control, adjustment, trouble-shooting, servicing, maintenance, and shut down of each item of equipment.

G. Demonstrate equipment functions (both individually and as part of the total integrated system).

H. Prepare and insert additional data in the operating and maintenance manuals when the need for additional data becomes apparent during instructions.

I. Submit a report within one week after completion of training. List time and date of each demonstration, hours devoted to the demonstration, and a list of people present, with their respective signatures.

J. At the conclusion of the on-site training program, have the person designated by the Owner sign a certificate to certify that he / she has a proper understanding of the system, that the demonstrations and instructions have been satisfactorily completed, and the scope and content of the operating and maintenance manuals used for the training program are satisfactory.

K. Provide a copy of the report and the certificate in an appropriately tabbed section of each Operating and Maintenance Manual.

3.4 OPENINGS

A. Framed, cast or masonry openings for boxes, equipment or conduits are specified under other divisions. Drawings and layout work for exact size and location of all openings are included under this division.

3.5 HOUSEKEEPING PADS

A. Provide concrete equipment housekeeping pads under all floor and outdoor mounted electrical equipment.

B. Concrete and reinforcing steel shall be as specified in Division 3, or as indicated or noted.

C. Concrete pads:
   1. 6-inches thick minimum indoors; 8-inches thick minimum outdoors, or match existing if indicated on the drawings to extend existing pads, or in other sections of the specifications.
   2. Chamfer strips at edges and corner of forms.
   3. Smooth steel trowel finish.
   4. Extend 3-inches minimum indoors beyond perimeter of equipment unless otherwise shown.
   5. 6-inch x 6-inch #8 wire reinforcement mesh.

3.6 OBSTRUCTIONS

A. The drawings indicate certain information pertaining to surface and subsurface obstructions, which has been taken from available drawings. Such information is not guaranteed, however, as to accuracy of location or complete information.
   1. Before any cutting or trenching operations are begun, verify with Owner's representative, utility companies, municipalities, and other interested parties that all available information has been provided.
   2. Should obstruction be encountered, whether shown or not, alter routing of new work, reroute existing lines, remove obstruction where permitted, or otherwise perform whatever work is necessary to satisfy the purpose of the new work and leave existing services and structures in a satisfactory and serviceable condition.

B. Assume total responsibility for and repair any damage to existing utilities or construction, whether or not such existing facilities are shown.

3.7 VANDAL RESISTANT DEVICES

A. Where vandal resistant screws or bolts are employed on the project, deliver to the Owner 2 suitable tools for use with each type of fastener used, and 25 percent spare fasteners.

B. Proof of delivery of these items to the Owner shall be included in the Operating and Maintenance Manuals.

3.8 PROTECTION

A. Protect work, equipment, fixtures, and materials. At work completion, work must be clean and in original manufacturer's condition.

B. Do not deliver equipment to this project site until progress of construction has reached the stage where equipment is actually needed or until building is closed in enough to protect the equipment from weather. Equipment allowed to stand in the weather shall be rejected, and the contractor is obligated to furnish new equipment of a like kind at no additional cost to the Owner.

3.9 COORDINATION OF BRANCH CIRCUIT OVERCURRENT AND PROTECTION DEVICES

A. Review with equipment specified which requires electrical connections. Review equipment shop drawings and manufacturer's nameplate data and coordinate exact branch circuit overcurrent protective device and conductors with equipment provided.
   1. Provide equipment manufacturer's recommended overcurrent protective device indicated on nameplate at no additional cost to the Owner.
   2. If branch circuit conductors and / or conduit sizing is less than the minimum required by equipment manufacturer, notify the Architect / Engineer immediately, prior to rough-in.

3. If equipment manufacturer is a substitution to the specified equipment manufacturer, provide the greater of the conductors specified or those required for the installed equipment manufacturer's minimum circuit conductors, at no additional cost to the Owner.
4. If conductors indicated on plans are in excess of that permitted by equipment manufacturer, notify Architect / Engineer immediately, prior to rough-in.
5. If conductors indicated on plans are in excess of that permitted by the equipment manufacturer, provide the maximum conductors permitted by the equipment manufacturer based on NEC ampacity tables, either in a single set, or as a set of parallel conductors as permitted by the NEC. Conductor size and quantity entering the equipment enclosures shall not exceed the equipment manufacturer's maximum recommendations.

3.10 FAULT CURRENT AND ARC FLASH STUDY FOR OVERCURRENT DEVICE COORDINATION

A. Contractor shall provide a coordination study, fault current analysis, and Arc-Flash study report for new electrical distribution equipment downstream to the last new overcurrent device in each feeder or branch circuit, conducted and prepared by the switchgear manufacturer. The coordination study and fault current analysis shall include the manufacturer's recommendations for all adjustable overcurrent devices specified or provided. Study does not require inclusion of existing switchgear, except it shall include existing or new overcurrent devices in existing switchgear serving new switchgear. Contractor shall submit the report results prior to submitting switchgear submittals to allow changes or modifications to equipment selection.

B. Contractor shall adjust all overcurrent device settings based on manufacturer's recommendations, or as directed by Owner / Architect at no additional cost to Owner. Settings for GFI shall be set at maximum as permitted by the NEC.

C. Arc-Flash & Shock-Hazard Warning Labels: Provide arc-flash and shock hazard-warning labels that comply with ANSI Z535.4 on switchgear, switchboards, transformers, motor control centers, panelboards, motor controllers, safety switches, industrial control panels and other equipment that is likely to require examination, adjustment, servicing, or maintenance while energized. Locate the marking to be clearly visible to qualified persons before examination, adjustment, servicing, or maintenance of the equipment. On renovation projects, install arc-flash warning labels on existing equipment where lock-out / tag-out will be required for the renovation work. Provide the information listed below on each label. Specify that arc-flash warning label information be produced by the electrical equipment manufacturer or supplier as a part of the final power system studies to be submitted by the Contractor in accordance with the electrical acceptance testing.
1. Note: In addition to the final arc-flash analysis, the final power system studies include load flow and fault-current calculations, and an overcurrent protective device (OCPD) coordination study based on the actual equipment to be installed for the project.

D. Information to be determined and applied to electrical equipment:
1. Arc-Flash Protection Boundary
2. Arc-Flash incident energy calculated in accordance with IEEE Std 15841 ™
3. Working distance calculated in accordance with IEEE Std 1584a ™
4. NFPA 70E Hazard / Risk Category Number or the appropriate personal protective equipment (PPE) for operations with doors closed and covers on.
    a. Typical operations include operating circuit breakers, fused switches, and meter selector switches.
5. System phase-to-phase voltage
6. Condition(s) when a shock hazard exists (e.g. "With cover off")
7. Limited Approach Boundary as determined from NFPA 70E, Table 130.2(C)
8. Restricted Approach Boundary as determined from NFPA 70E, Table 130.2(C)
9. Prohibited Approach Boundary as determined from NFPA 70E, Table 130.2(C)
10. Unique equipment designation or code (described under "Component Identification"

11. Class for insulating gloves based on system voltage (e.g., Class 00 up to 500V)
12. Voltage rating for insulated or insulating tools based on system voltage (e.g., 1000V)
13. Date that the hazard analysis was performed.
14. "Served from" circuit directory information including the serving equipment designation, location (e.g., room number), circuit number, and circuit voltage / number of phases / number of wires.
15. If applicable, the "serves" circuit directory information including the served equipment designation, location (e.g., room number), circuit number, and circuit voltage / number of phases / number of wires.
16. An abbreviated warning label may be used where it has been determined that no dangerous arc-flash hazard exists in accordance with IEEE 1584a ™, paragraph 9.2.3.
17. Use a "DANGER" label where the calculated arc-flash incident energy exceeds 40 cal/cm.

E. Submittals: Submit four copies of coordination study and certified fault current study results to the Architect for review.

3.12 TESTING

A. The contractors for the various sub-systems shall submit proposed testing procedures for their systems, subject to review and approval and Owner acceptance. The contract will not be declared to be substantially complete until the functional operation of the subsystems have been demonstrated and verified and reports have been provided, reviewed and accepted.

B. The project will not be declared substantially complete until the following has taken place.
1. The "As-Built" drawings have been submitted, reviewed and accepted by the Architect / Owner / Owner's Construction Representative.
2. The building emergency lighting system and other systems including but not limited to those listed below have been tested, completed factory start-up and programming and adjusting as required for a complete and fully operational system acceptable to the Architect and Owner.
   a. Overcurrent devices
   b. Motor Controllers

3.13 LOAD BALANCING

A. Balance the loads on each low-voltage feeder so that the voltage on each phase is within +/- 1.0% of the average voltage of the three phases. Refer to the DOE Office of Industrial Technologies, "Motor Tip Sheet #7" dated September 2005 available for download to PDF format at no charge at:
http://www1.eere.energy.gov/industry/bestpractices/pdfs/eliminate_voltage_un_balanced_motor-systemts7.pdf

END OF SECTION

SECTION 26 05 05

ELECTRICAL ALTERATIONS PROJECT PROCEDURES

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Inspection and service of existing equipment and materials to remain or be reused.

B. Handling of equipment and materials to be abandoned.

C. Handling of equipment and materials to be removed.

1.2 QUALITY ASSURANCE

A. Coordination with the Contractor prior to the disconnection or shutdown of existing equipment, or to the modification of existing operational systems.

1.3 CONTRACT DRAWINGS

A. There is the possibility that there exist conditions and devices that are affected by the work indicated on the drawings and called for in the specifications (project manual) that do not appear on the drawings. It is the Contractors responsibility to visit the site and determine all of the existing conditions and to consider these existing conditions when making and presenting a proposal, to have a complete proposal.

PART 2 - PRODUCTS

2.1 MATERIALS AND EQUIPMENT

A. Material used to upgrade and repair existing equipment shall conform to that specified.

B. Material used to upgrade and repair existing equipment shall not void existing warranties or listings of the equipment to be upgraded or repaired.

C. Material used to upgrade and repair existing equipment shall be new and shall be of the same manufacturer of the existing equipment, shall be acquired through the existing original equipment manufacturer’s approved distribution channels, shall have manufacturer’s warranties for the new material being used, and shall be listed for the use intended.

PART 3 - EXECUTION

3.1 INSPECTION

A. Existing materials and equipment indicated on the drawings or in the specifications to be reused shall be inspected for damaged or missing parts. Notify the Architect / Engineer, in writing, accordingly.

B. If using materials specified or shown on the drawing voids or diminishes the warranty or operation of remaining equipment or systems, the Contractor shall notify the Architect / Engineer, in writing.

C. Verify field measurements and circuiting arrangements.

D. Verify that abandoned wiring, panelboards, and switchboards, disconnect switches, and equipment

serve only abandoned facilities. Where abandoned wiring, panelboards, switchboards, and equipment which serve existing facilities are to remain, Contractor shall provide means and methods to ensure existing facilities remain energized with the correct voltage, overcurrent protection, conductors, and circuit ampacity required by the existing facilities to remain.

E. Demolition Drawings are based on casual field observation, and when available, existing record documents. Report discrepancies to Architect before disturbing existing installation, and immediately after such discrepancies are discovered.

3.2 APPLICATION

A. Existing materials and equipment indicated on the drawings or in the specification to be reused shall be cleaned and reconditioned, including tightening of feeder and bus bar lugs prior to installation and reuse in the modified system.

B. Remove existing luminaries for alterations/renovations. Use mild detergent to clean all exterior and interior surfaces; rinse with clean water and wipe dry. For each luminarie that is taken down for alteration and then reinstalled, replace damaged parts, provide new lamps and, with matching paint, touch-up scratched or abraded areas, and replace cracked, broken or missing lenses or diffusers. Replace unrepairable fixtures with new fixtures

C. Material and equipment removed that is not to be salvaged for Owner's use or for reuse on the project shall become the property of the Contractor and shall be removed from the site.

D. Prior to start of construction, Contractor shall walk areas to be renovated with Owner to identify and document items to be salvaged for Owner’s use.

E. Material or equipment salvaged for Owner's use shall be carefully handled and stored where directed by the Owner.

F. Materials and equipment not indicated to be removed or abandoned shall be reconnected to the new system.

G. Clean and repair existing materials and equipment that remain or are to be reused.

H. Panelboards Reused and Modified for Renovation: Clean exposed surfaces and check tightness of electrical connections. Replace damaged circuit breakers and provide closure plates for vacant positions. Provide typed circuit directory showing revised circuiting arrangement.

3.3 SEQUENCING AND SCHEDULING

A. Coordinate utility service outages with Utility Company, Architect and Owner.

B. Provide temporary wiring and connections to maintain existing systems in service during construction. When work must be performed on energized equipment or circuits use personnel experienced in such operations.

C. Existing Electrical Service: Refer to drawings for work in remodeled areas. Where facilities in these areas are to remain in service, any related work to keep the facilities in operation is specified in this Division. Maintain existing system in service until new system is complete and ready for service. Disable system only to make switchovers and connections. Obtain written permission from Owner at least 10 business days before partially or completely disabling system. Minimize outage duration. Make temporary connections to maintain service in areas adjacent to work area. Disclose the extent, exact time and expected duration of the outage in a written request to the Owner.

D. Remove and replace existing conduit, wiring, outlets, devices, lighting fixtures, panels and appurtenances as occasioned by new or remodeled construction. Re-establish service to lights, switches and devices that may be interrupted by remodeled construction.

E. Disconnect electrical systems in walls, floors and ceilings scheduled for removal. When outlets are removed, wire shall be pulled out of the conduit back to the nearest remaining box or cabinet.
   1. Remove exposed conduit that has been abandoned.
   2. Cap conduit beyond the finish line.
   3. Provide unswitched circuit leg for emergency battery powered equipment; circuit from same branch circuit breaker as switched normal lighting circuit.

F. Where new/existing luminaries or devices are shown being connected to existing circuits:
   1. Field verify existing system voltage
   2. Provide ballast / device to match system voltage

G. Verify the loading of each circuit affected by remodeling work. The maximum load of any branch circuit shall not exceed 80% of its rating.

H. Remove equipment, systems, conductors, wiring, raceways, etc. abandoned or not required for existing or new systems. Coordinate with Architect / Owner for salvage by Owner. Remove abandoned / not required raceways and wiring back to nearest box serving load to remain, or back to panel if not serving remaining load.

I. Existing Power, and Lighting and Appliance Branch Circuit Distribution System: Maintain existing system in service unless as noted or specified otherwise. Disable system only to make switchovers and connections. Notify Owner at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

J. Existing Lighting System: Maintain existing system in service unless as noted or specified otherwise. Disable system only to make switchovers and connections. Notify Owner at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

K. Existing Fire Alarm System: Maintain existing system in service. Disable system only to make switchovers and connections. Notify Owner and local fire service at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

L. Existing Telephone System: Maintain existing system in service. Disable system only to make switchovers and connections. Notify Owner and Telephone Company at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

M. Existing Paging and Sound Reinforcement Systems: Maintain existing system in service. Disable system only to make switchovers and connections. Notify the Owner at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

N. Existing Data Network: Maintain existing system in service. Disable system only to make switchovers and connections. Notify the Owner at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

O. Existing Video Distribution System: Maintain existing system in service. Disable system only to make switchovers and connections. Notify the Owner at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

P. Existing Security System: Maintain existing system in service. Disable system only to make switchovers and connections. Notify the Owner at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

Q. Existing Video Surveillance System: Maintain existing system in service. Disable system only to make switchovers and connections. Notify the Owner at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

3.4 DEMOLITION AND EXTENSION OF EXISTING ELECTRICAL WORK

A. The Contractor shall modify, remove, and/or relocate all materials and items so indicated on the drawings or required by the installation of new facilities. All removals and/or dismantling shall be conducted in a manner as to produce maximum salvage. Salvage materials shall remain the property of the Owner, and shall be delivered to such destination as directed by the Owner's representative unless they are not wanted, then it will be the responsibility of this Contractor to remove such items and properly dispose of them. Materials and/or items scheduled for relocation and which are damaged during dismantling or reassembly operations shall be repaired and restored to good operative condition. The Contractor may, at his discretion, and upon approval of the Owner's representative substitute new materials and/or items of like design and quality in lieu of materials and/or items to be relocated.

1. Remove abandoned electrical distribution equipment, utilization equipment, outlets and accessible portions of wiring, raceway systems, and cables back to the source panelboard, switchboard, switchgear, communications closet, or cabinet. Abandoned wiring and raceways can result from actions that include the following:
    a. Equipment is removed or relocated
    b. Fixtures are removed or relocated
    c. System is no longer used
    d. There is no demonstrable near term future use for the existing circuit or raceway system.
2. Leave abandoned electrical equipment, conductors, and material in place only if one or more of the following conditions exist:
    a. The removal requires the demolition of other structures, finishes, or equipment that is still in use. An example is abandoned conduit above an existing plaster ceiling.
    b. Removal is not feasible due to hazards, construction methods, or restricted access.
    c. Removal of abandoned conductors may damage conductors that must remain operational.
3. Remove conduits, including those above accessible ceilings, to the point that building construction, earth, or paving covers them. Cut conduit beneath or flush with building construction or paving. Plug, cap, or seal the remaining unused conduits. Install blank covers for abandoned boxes and enclosures not removed.
4. Extend existing equipment connections using material and methods compatible with the existing electrical installation and this division.
5. Restore the original fire rating of floors, walls, and ceilings after electrical demolition.
6. Use approved lock-out / tag-out procedures to control hazardous energy sources. Assure that an electrically safe work condition exists in the demolition area before beginning demolition. Where possible, disconnect the building from all sources of electrical power

before beginning demolition.

B. All items to be relocated shall be carefully removed in reverse to original assembly or placement and protected until relocated. The Contractor shall clean, repair, and provide all new materials, fittings, and appurtenances required to complete the relocations and to restore them to good operative order. All relocations shall be performed by workmen skilled in the work and in accordance with standard practice of the trades involved.

C. When items scheduled for relocation and/or reuse are found to be in damaged condition before work has been started on dismantling, the Contractor shall call the attention of the Owner's representative to such items and receive further instructions before removal. Items damaged in repositioning operations are the contractor's responsibility and shall be repaired or replaced by the contractor as approved by the owner's representative, at no additional cost to the Owner.

D. Conduit and wiring to items to be removed, salvaged, or relocated shall be removed to points indicated on the drawings, specified, or acceptable to the Owner's representative. Conduit and wiring not scheduled for reuse shall be removed to the points at which reuse is to be continued or service is to remain. Such services shall be sealed, capped, or otherwise tied-off or disconnected in a safe manner acceptable to the Construction Inspector. All disconnections or connections into the existing facilities shall be done in such a manner as to result in minimum interruption of services to adjacent occupied areas. Services to existing areas or facilities that must remain in operation during the construction period shall not be interrupted without prior specific approval of the Owner's representative hereinbefore specified.

E. Disconnect abandoned outlets and remove devices. Remove abandoned outlets if conduit servicing them is abandoned and removed. Provide blank cover for abandoned outlets that are not removed. Replace existing wiring devices and cover plates with new wiring devices and new cover plates in renovated areas. Any corridor, room, or area indicated to have any new wiring devices installed shall have all of the existing wiring devices and cover plates replaced with new wiring devices and new cover plates.

F. Disconnect and remove electrical devices and equipment serving utilization equipment that has been removed.

G. Disconnect and remove abandoned luminaries. Remove brackets, stems, hangers, and other accessories.

H. Repair adjacent construction and finishes damaged during demolition and extension work.

I. Maintain access to existing electrical installations that remain active. Modify installation or provide access panel as appropriate.

J. Extend existing installations using materials and methods compatible with existing electrical installations, or as specified.

K. Existing conduit raceway found to need additional hangers installed and/or junction box covers shall be added at no additional cost to the Owner.

L. Disconnect and remove electrical devices and equipment serving utilization equipment that has been removed.

3.5 PROTECTION OF THE WORK

A. Provide adequate temporary support and auxiliary structure as necessary to ensure structural value or integrity of affected portion of work.

B. Provide devices and methods to protect other portions of work from damage.

C. Execute fitting and adjustment of products to provide a finished installation to comply with specified products, functions, tolerances and finishes.

3.6 IDENTIFICATION OF EQUIPMENT IN RENOVATED AREAS

A. Identification of Equipment: Provide new, typed panel directory cards (and card holders if needed) for existing panelboards located within the renovated areas. Ring out all new and existing circuits within these panelboards as specified in Section 26 05 00 Electrical General Provisions. Do not include the description “existing”. Provide new nameplates for all existing electrical equipment in renovated areas as specified in Section 26 05 00 Electrical General Provisions.

3.7 CORRECTIVE MEASURES FOR DAMAGE DURING CONSTRUCTION IN EXISTING LOW VOLTAGE SYSTEMS

A. Repairs, equipment replacements, and corrections to low voltage systems due to damage caused by contractor:
   1. Notify the Owner immediately of any disruption or damage to any low voltage system.
   2. Any disruption or damage to the existing access control system or fire alarm system shall be corrected the same day as the disruption or damage occurred. The access control system and fire alarm system shall be tested daily in the presence of the owner prior to the Contractor leaving the job site each day.
   3. For each low voltage system other than access control or fire alarm system, a manufacturer certified contractor and certified technicians shall perform corrective measures to each system component that was functional prior to demolition and renovation and found defective or non-functional within 14-days prior to estimated date of substantial completion.
   4. Corrective measures to all low voltage systems to correct components of the low voltage systems found damaged by the contractor shall be completed to the satisfaction of the Owner and Architect / Engineer prior to acceptance of substantial completion at no additional cost to the Owner.

END OF SECTION

SECTION 26 05 10

CONTRACT QUALITY CONTROL

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Contract quality control including workmanship, manufacturer's instructions, mock-ups and demonstrations.

1.2 QUALITY CONTROL PROGRAM

A. Maintain quality control over supervision, subcontractors, suppliers, manufacturers, products, services, site conditions and workmanship to produce work in accordance with contract documents. Submit a narrative outline of the Quality Control Program or Plan.

1.3 WORKMANSHIP

A. Comply with industry standards except when more restrictive tolerances or specified requirements indicate more rigid standards or more precise workmanship.

B. Perform work by persons qualified to produce workmanship of specified quality. Persons performing electrical work shall be required to be licensed. There shall be on-site supervision at all times, including punch list work, with that person having a minimum of journeyman license. Helpers, apprentices shall have a minimum of apprentice license.

C. Secure products in place with positive anchorage devices designed and sized to withstand stresses, vibration, and racking. Under no conditions shall material or equipment be suspended from structural bridging.

D. Provide finishes matching approved samples; all exposed finishes shall be approved by the Architect / Engineer. Submit color samples as required.

1.4 MANUFACTURER'S INSTRUCTIONS

A. Comply with instructions in full detail, including each step in sequence.

B. Should instruction conflict with Contract Documents, request clarification from Architect / Engineer before proceeding.

1.5 MANUFACTURER'S CERTIFICATES

A. When required in individual Specification Sections, submit manufacturer's certificate in duplicate, certifying that products meet or exceed specified requirements.

1.6 MANUFACTURER'S FIELD SERVICES

A. When required in individual Specification Sections, manufacturer shall provide manufacturer’s qualified personnel to observe:
   1. Field conditions
   2. Condition of installation
   3. Quality of workmanship
   4. Start-up of equipment
   5. Testing, adjusting, and balancing of equipment

B. Manufacturer’s qualified personnel shall make written report of observations and recommendations to Architect / Engineer.

PART 2 - PRODUCTS

2.1 EQUIPMENT AND MATERIAL

A. Comply with recognized National rating and approval agencies as well as all codes and ordinances at the federal, state and city levels.

PART 3 - EXECUTION

3.1 ADJUSTMENTS AND MODIFICATIONS

A. Contractor shall provide all adjustments and modifications as requested by the manufacturer’s qualified personnel at no additional cost to Owner.

B. Coordination Drawings:
1. Electrical room size and location required and to scale
2. Equipment and accessories, switchgear and piping
3. Indicate clearances and service access.

3.2 ELECTRICAL ACCEPTANCE TESTING

A. Perform electrical acceptance testing and inspections in accordance with the current edition of the International Electrical Testing Association (NETA), *Acceptance Testing Specification* (ATS).

B. Perform acceptance testing, inspection, function tests, and calibration to assure that installed electrical systems and components, both Contractor and user-supplied are:
1. Installed in accordance with design documents and manufacturer’s instructions.
2. Tested and inspected in accordance with applicable codes and standards (e.g. NFPA 110 and NFPA 111).
3. Ready to be energized.
4. Operational within industry and manufacturer’s tolerances.

3.3 INSPECTIONS BY LOCAL AUTHORITY HAVING JURISDICTION (AHJ)

A. Contractor shall notify design prime consultant and associated Architect / Owner’s Construction Manager when he requests an inspection by the AHJ.

END OF SECTION

SECTION 26 05 12

ELECTRICAL SHOP DRAWINGS, COORDINATION DRAWINGS & PRODUCT DATA

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Prepare submittals as required by Division 1 and as outlined below.

B. Submit product data shop drawings only for the following and for items specifically requested elsewhere in the Contract Drawings and Specifications. Architect / Engineer reserves the right to refuse shop drawings not requested for review and to imply that materials shall be provided as specified without exception.

C. The term submittal, as used herein, refers to all:
1. Shop Drawings
2. Coordination Drawings
3. Product data

D. Submittals shall be prepared and produced for:
1. Distribution as specified
2. Inclusion in the Operating and Maintenance Manual, as specified, in the related section

1.2 ARCHITECT / ENGINEER REVIEW OF IDENTIFIED SUBMITTALS

A. The Architect / Engineer will:
1. Review identified submittals with reasonable promptness and in accordance with schedule. Specific equipment submittals that may be required to be expedited shall be submitted separately without other submittal items not requiring the same prompt attention.
2. Affix stamp and initials or signature, and indicate requirements for resubmittal or approval of submittal
3. Return submittals to Contractor for distribution or for resubmission

B. Review of submittals will not extend to design data reflected in submittals that is peculiarly within the special expertise of the Contractor or any party dealing directly with the Contractor.

C. Architect / Engineer's review is only for conformance with the design concept of the project and for compliance with the information given in the contract.
1. The review shall not extend to means, methods, sequences, techniques or procedures of construction or to safety precautions or programs incident thereto.
2. The review shall not extend to review of quantities, dimensions, weights or gauges, fabrication processes or coordination with the work of other trades.

D. The review and approval of a separate item as such will not indicate approval of the assembly in which the item functions.

1.3 SUBSTITUTIONS

A. Do not make requests for substitution employing the procedures of this Section.

B. The procedure for making a formal request for substitution is specified in Division 1.

PART 2 - PRODUCTS - NOT USED

PART 3 - EXECUTION

3.1 SPECIFICATION COMPLIANCE REVIEW

A. Mark up a complete copy of the specification section for the product to indicate a) acknowledgement of the specification requirement (Comply), or b) acknowledgement that the particular specification requirement does not apply to this specific project (Not Applicable) or, c) acknowledgement that the specification requirement cannot be made or that a variance is being submitted for review to the Architect / Engineer / Owner (Does Not Comply, Explanation:) Do not submit an outline form of compliance, submit a complete copy with the product data.

3.2 COMPOSITE COORDINATION DRAWINGS

A. Produce a set of composite coordinate drawings for review and comment within four (4) weeks of receipt of Owner's official Notice to Proceed. Show coordination of structural and architectural elements with HVAC piping, ductwork, mechanical equipment, electrical conduit, low voltage systems cabling, lighting, electrical switchgear and panels, security and CCTV systems, domestic water piping, roof drains and storm sewer piping, sanitary sewer piping and fire sprinkler piping and a composite above-ceiling plan, below slab coordination drawings, and a composite mechanical and electrical equipment room floor plan.
   1. Prepare the composite plans at one-quarter inch (1/4") equals one-foot scale. Include larger scale sections with vertical elevations of elements as required to confirm coordinate of all elements.
   2. For each room containing major electrical switchgear and each outside equipment area with major electrical switchgear and other equipment also include NEC working space, NEC equipment space, and NEC access to NEC working space, and housekeeping pad location and dimensions.
   3. Prepare coordination drawings to coordinate installations for efficient use of available space allowing for future additional equipment wherever possible, for proper sequence of installation, and to resolve conflicts. Coordinate with work specified in other sections and other divisions of the specifications.
   4. Identify field dimensions. Show relation to adjacent or critical features of work or products.

B. Submit composite coordination shop drawings in plan, elevation and sections, showing receptacles, outlets, electrical and telecommunication devices in casework, cabinetwork and built-in furniture.
   1. Verify location of wiring devices and outlets, communication devices and outlets, safety and security devices, and other work specified in this Division.
   2. Coordinate with drawing details, site conditions, composite coordination drawings, and millwork other equipment shop drawings prior to installation.
   3. Submit coordination and shop drawings prior to rough-in and fabrication.

3.3 EQUIPMENT SHOP DRAWINGS AND PRODUCT DATA

A. Submittals shall not be combined or bound together with any other material submittal.

B. Submittal Specification Information:
   1. Every submittal document shall bear the following information as used in the project manual:
      a. The related specification section number
      b. The exact specification section title
   2. Submittals delivered to the Architect / Engineer without the specified information will not be processed. The Contractor shall bear the risk of all delays, as if no submittal had been delivered.

C. All product options specified shall be indicated on the product data submittal. All options listed on the standard product printed data not clearly identified as not part of the product data submitted shall become part of the Contract and shall be provided.

D. Mark each copy of standard printed data to identify pertinent products, referenced to specification section and article number.

E. Show reference standards, performance characteristics and capacities; wiring and piping diagrams and controls; component parts; finishes; dimensions and required clearances.

F. Modify manufacturer's standard schematic drawings and diagrams to supplement standard information and to provide information specifically applicable to the work. Delete information not applicable.

G. Submit drawings in a clear and thorough manner. Identify details by reference to sheet and detail, schedule, or room numbers shown on Contract Drawings.

H. Show all dimensions of each item of equipment in its to be installed assembled condition with all components assembled. Include a series of drawings of individual components as necessary for reference.

I. Identify field dimensions; show relation to adjacent or critical features or work or products.

J. Submit individually bound shop drawings and product data for the following when specified or provided. The Fault Current and Overcurrent Device Coordination Analysis shall be submitted prior to other switchgear.
1. Fault Current and Overcurrent Device Coordination Analysis. Submit this analysis three (3) weeks prior to any overcurrent device submittal to allow modifications to overcurrent device product selection submittal based on the manufacture’s analysis and recommendations at no additional cost to the Owner.
2. Enclosed Switches and Circuit Breakers
3. Enclosed Motor Controllers
4. Panelboards, load centers, and enclosures
5. Wiring devices
6. Lighting fixtures
7. Lighting Controls and Occupancy Sensors
8. Surge Protection Devices
9. Site Lighting Poles, Fixtures, Drivers, and Lamps
10. Electrical controls and time switches
11. Electrical Contactors
12. Modifications to existing motor control centers
13. Transformers
14. New circuit breakers for existing switchboards

3.4 MANUFACTURERS INSTRUCTIONS

A. Submit Manufacturer's instructions for storage, preparation, assembly, installation, start-up, adjusting, calibrating, balancing and finishing.

3.5 CONTRACTOR RESPONSIBILITIES

A. Review submittals prior to transmittal.

B. Determine and verify:

1. Field measurements
2. Field construction criteria
3. Manufacturer's catalog numbers
4. Conformance with requirements of Contract Documents

C. Coordinate submittals with requirements of the work and of the Contract Documents.

D. Notify the Architect / Engineer in writing at time of submission of any deviations in the submittals from requirements of the Contract Documents.

E. Do not fabricate products, or begin work for which submittals are specified, until such submittals have been produced and bear contractor's stamp. Do not fabricate products or begin work scheduled to have submittals reviewed until return of reviewed submittals with Architect / Engineer's acceptance.

F. Contractor's responsibility for errors and omissions in submittals is not relieved whether Architect / Engineer reviews submittals or not.

G. Contractor's responsibility for deviations in submittals from requirements of Contract Documents is not relieved whether Architect / Engineer reviews submittals or not, unless Architect / Engineer gives written acceptance of the specific deviations identified by the Contractor on reviewed documents.

H. Submittals shall show sufficient data to indicate complete compliance with Contract Documents:
1. Proper sizes and capacities
2. That the item will fit in the available space in a manner that will allow proper service
3. Construction methods, materials and finishes

I. Schedule submissions at least 15 days before date reviewed submittals will be needed by the Contractor for processing or for making corrections for re-submittal.

J. Contractor’s Stamp of Approval
1. Contractor shall stamp and sign each document certifying to the review of products, field measurements and field construction criteria, and coordination of the information within the submittal with requirements of the work and of Contract Documents.
2. Contractor's stamp of approval on any submittal shall constitute a representation to Owner and Architect / Engineer that Contractor has either determined and verified all quantities, dimensions, field construction criteria, materials, catalog numbers, and similar data or assumes full responsibility for doing so, and that Contractor has reviewed or coordinated each submittal with the requirements of the work and the Contract Documents.
3. Do not deliver any submittals to the Architect / Engineer that do not bear the Contractor's stamp of approval and signature.
4. Submittals delivered to the Architect / Engineer without Contractor's stamp of approval and signature will not be processed. The Contractor shall bear the risk of all delays, as if no submittal had been delivered.

3.6 SUBMISSION REQUIREMENTS

A. Make submittals promptly in accordance with approved schedule, and in such sequence as to cause no delay in the Project or in the work of any other Contractor. Product and equipment related to site work or other trades which require extensive rough-in, foundations, or structural support shall be submitted as soon as possible after given notice to proceed with construction.

B. Number of submittals required:
1. Shop Drawings and Coordination Drawings: Submit one electronic data file (pdf) and

three opaque reproductions.

2. Product Data: Submit the number of copies the contractor requires, plus those to be retained by the Architect / Engineer, and/or electronic data (pdf) files.

C. Accompany submittals with transmittal letter, in duplicate, containing:
   1. Date
   2. Project title and number
   3. Contractor's name, address and telephone number
   4. The number of each Shop Drawing, Project Datum and Sample submitted
   5. Other pertinent data

D. Submittals shall include:
   1. The date of submission
   2. The project title and number
   3. Contract Identification
   4. The names of:
      a. Contractor
      b. Subcontractor
      c. Supplier
      d. Manufacturer
   5. Identification of the product
   6. Field dimensions, clearly identified as such
   7. Relation to adjacent or critical features of the work or materials
   8. Applicable standards, such as ASTM or federal specifications numbers
   9. Identification of deviations from contract documents
   10. Suitable blank space for General Contractor and Architect / Engineer stamps
   11. Contractor's signed and dated Stamp of Approval

E. Coordinate submittals into logical groupings to facilitate interrelation of the several items.
   1. Finishes which involve Architect / Engineer selection of colors, textures or patterns
   2. Associated items requiring correlation for efficient function or for installation

3.7 RESUBMISSION REQUIREMENTS

A. Make resubmittals under procedures specified for initial submittals. Re-submittals shall be a complete submittal as if it were the initial submittal unless otherwise instructed in the review comments on the original submittal.
   1. Indicate that the document or sample is a resubmittal
   2. Identify changes made since previous submittals

B. Indicate any changes which have been made other than those requested by the Architect / Engineer.

END OF SECTION

SECTION 26 05 19

CONDUCTORS AND CONNECTORS – 600 VOLT

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Provide electrical conductors, wire and connector work as shown, and specified.

B. Types: The types of conductors and connectors required for the project include the following:
1. 600V building conductors
2. 600V building conductor connectors

C. Application: The applications for conductors and connectors required on the project are as follows:
1. Power distribution circuitry
2. Lighting branch circuitry
3. Appliance, receptacle, and equipment branch circuitry
4. Motor branch circuitry
5. Control wiring
6. Line voltage

D. Refer to other specific specification sections for voice, video, data, alarm and instrumentation cables.

1.2 QUALITY ASSURANCE

A. UL Label: Conductors and connectors shall be UL labeled.

1.3 REFERENCES

A. Refer to other specific specification sections regarding specialized wiring and connections.

PART 2 – PRODUCTS – Provide products manufactured in the USA

2.1 CONDUCTORS AND CONNECTORS

A. General: Except as indicated, provide conductors and connectors of manufacturer's standard materials, as indicated by published product information, designed and constructed as instructed by the manufacturer, and as required for the installation.

B. Cable Lubricant: Fire resistant, nonflammable, water-based type for standard building conductors. Provide cable lubricants for fire rated cables as recommended by the cable manufacturer.

C. Conductors: Provide factory-fabricated conductors of the size, rating, material, and type as indicated for each use. Conductors shall be soft or annealed copper wires meeting, before stranding, the requirements of ASTM B 3, Standard Specification for Soft or Annealed Copper Wire for Electrical Purposes, latest edition.
1. Conductors for control wiring sized #14 AWG through #10 AWG shall be stranded.
2. Conductors for power and lighting shall be stranded. Stranding shall be Class B meeting the requirements of ASTM B 8, Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium Hard, or Soft.

D. Insulation for standard building conductors: Insulation shall meet or exceed the requirements of UL 83, Standard for Thermoplastic Insulated Wires.

1. All wiring inside lighting fixtures shall be temperature rated per NEC.
2. Insulation for copper conductors shall be UL Type THHN/THWN, 90 degrees C.

2.2 COLOR CODES FOR CONDUCTORS FOR BRANCH CIRCUITS AND FEEDERS

A. Color coding for conductors as required by NEC 210.5. Color coding for phase and voltage shall be as required by local codes and local standards. Where such standards do not exist, color coding shall be as follows:

Color Code Table	**USE CONTINUOUS COLOR CODED INSULATION THROUGHOUT**					
System/ Phase	**A**	**B**	**C**	**N**	**G**	**IG**
120/208 3 Ph	Black	Red	Blue	White	Green	Green/Yellow Stripe
120/240 3 Ph	Black	Orange	Blue	White	Green	Green/Yellow Stripe
120/240 1 Ph	Black	N/A	Blue			
277/480	Brown	Purple	Yellow	Gray	Green	Green/Yellow Stripe

Notes to Color Code Table:
1. 120/208, 120/240, and 277/480 Volt Systems shall be routed in separate raceways.
2. Switched legs of phase conductors for lighting and appliance branch circuits shall be of the same color as described above throughout the entire circuit.
3. Conductors shall be the same color from breaker to device or outlet.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General: Install electrical conductors and connectors as shown, in accordance with the manufacturer's written instructions, the requirements of NEC, the NECA Standard of Installation, and industry practices.

B. Coordination: Coordinate conductor installation work with electrical raceway and equipment installation work, as necessary for interface.

C. Conductors:
1. Provide a grounded (neutral) conductor for each branch circuit. Do not share grounded (neutral) conductors.
2. No more than six phase conductors shall be installed in a single raceway. Any combination of phase conductors and grounded (neutral) conductors in any raceway shall not exceed nine.
3. When any combination of four or more phase and grounded (neutral) conductors are installed in a raceway, the minimum size for all conductors including equipment ground conductor shall be #10 AWG, and they shall be de-rated accordingly.
4. When more than four (4) conductors are size #10 AWG, they shall be installed in a one-inch conduit.
5. Pull conductors together when more than one is being installed in a raceway. Whenever possible, pull conductors into their respective conduits by hand. Use pulling lubricant when necessary.
6. Before any conductor is pulled into any conduit, thoroughly swab the conduit to remove

foreign material and to permit the wire to be pulled into a clean, dry conduit.

7. Run feeders their entire length in continuous section without joints or splices.
8. No wire smaller than #12 AWG shall be permitted for any lighting or power circuit. No wire smaller than #14 AWG shall be used for any control circuit, unless shown otherwise.
9. Provide the same size wire form the panelboard to last outlet on circuit. For 20 amp branch circuits operating at 150V or less, provide #10 AWG wire when the first outlet is over 75-feet from the panelboard. For branch circuits operating at 150 to 600 volts, provide #10 AWG wire when the first outlet is over 150-feet from the panelboard.
10. Branch circuit voltage drop shall not exceed 3% of rated voltage.
    a. Total voltage drop from the point of service to the last outlet or utilization equipment of the same voltage shall not exceed five-percent of rated voltage.
    b. Total voltage drop from the point of service to transformers with adjustable taps, buck-boost transformers, uninterruptable power supplies (UPS), or voltage regulators shall not exceed five-percent of rated voltage.
    c. Total voltage drop from a separately derived system, transformer with adjustable taps, buck-boost transformer, uninterruptable power supply (UPS), or voltage regulator to the last outlet or utilization equipment of the same voltage shall not exceed five-percent of rated voltage.
    d. Total voltage drop from the point of service to distribution equipment of the same voltage shall not exceed two-percent of rated voltage.
    e. Branch circuit voltage drop from distribution equipment to the last outlet or utilization equipment shall not exceed three-percent of rated voltage.
    f. Provide the same size branch circuit conductors to last outlet on circuit unless specifically noted or indicated otherwise on the drawings. For 20 amp branch circuits operating at 150-Volts or less, provide #10 AWG wire when the first outlet is over 75-feet from the panelboard. For branch circuits operating above 150-Volts to 600-Volts, provide #10 AWG wire when the first outlet is over 150-feet from the panelboard.
11. No tap or splice shall be made in any conductor except in outlet boxes, pull boxes, junction boxes, splice boxes, or other accessible locations. Make taps and splices using an approved compression connector. Insulate taps and splices equal to the adjoining conductor. Make splices or taps only on conductors that are a component part of a single circuit, protected by approved methods. Taps or splices in feed through branch circuits for connection to light switches or receptacles shall be made by pigtail connection to the device.
12. Support conductors in vertical raceways, as required by the NEC.
13. Do not permit conductors entering or leaving a junction or pull box to deflect to create pressure on the conductor insulation.
14. Make joints in branch circuits only where circuits divide. These shall consist of one through circuit to which the branch from the circuit shall be spliced.
15. Make connections in conductors up to a maximum of one #6 AWG wire with two #8 AWG wires using twist-on pressure connectors of required size.
16. Make connections in conductors or combinations of conductors larger than specified using cable fittings of type and size required for specific duty.
17. After a splice is made, insulate entire assembly with UL-approved insulating tape to a value equivalent to the adjacent insulation.
18. Make splices and connections in control circuit conductors using UL-approved solderless crimp connectors.
19. All conduits shall be installed with an insulated grounding conductor per NEC 250.122. Where green conductor insulation is not available, the ground conductor shall be identified with green phasing tape at all accessible locations.
20. Neatly train and lace wiring inside boxes, equipment and panelboards. Provide tie-straps around conductors with their shared neutral conductor where there are more than two neutral conductors in a conduit.

21. Clean conductor surfaces before installing lugs and connectors.
22. Make splices, taps and terminations to carry full ampacity of conductors with no perceptible temperature rise.
23. Provide stranded conductors connected with pressure type connectors / compression fittings and terminal lugs UL listed for the type of conductor used (AL-CU) and correctly sized to the diameter of the bare conductors.
24. Run mains and feeders their entire length in continuous pieces without splices or joints.
25. Color code conductors.
26. Do not install a pull string in conduits containing conductors.
27. Conductors shall be the same color from load side of overcurrent protection device to outlet or utilization equipment.
28. Spare conductors shall not be installed in any conduit, gutter, raceway, panel or enclosure unless noted otherwise.

D. Identification: Label each phase conductor in each junction box with corresponding circuit number, using self-adhesive wire markers.

E. Splices and Joints:
1. In accordance with UL 486A, C, D, E, and NEC.
2. Aboveground Circuits (No. 10 AWG and smaller):
   a. Connectors: Solderless, screw-on, reusable pressure cable type, rated 600 V, 220˚ F, with integral insulation, approved for copper and aluminum conductors.
   b. The integral insulator shall have a skirt to completely cover the stripped wires.
   c. The number, size, and combination of conductors, as listed on the manufacturers' packaging, shall be strictly followed.
3. Motor connections:
   a. All AHU motors connections shall be split bolt connectors.
   b. All non-AHU motors 10 HP and larger shall be split bolt connectors.
   c. All non-AHU motors less than 10 HP shall be split bolt connectors or as recommended by the manufacturer.

F. Aboveground Circuits (No. 8 AWG and larger):
1. Connectors shall be indent, hex screw, or bolt clamp type of high conductivity and corrosion resistant material, listed for use with copper and aluminum conductors.
2. Provide field-installed compression connectors for cable sizes 250 kcmil and larger with not less than two clamping elements or compression indents per wire.
3. Insulate splices and joints with materials approved for the particular use, location, voltage, and temperature. Splice and joint insulation level shall be not less than the insulation level of the conductors being joined.
4. Plastic electrical insulating tape: Per ASTM D2304, flame-retardant, cold and weather resistant.

G. Underground Branch Circuits and Feeders:
1. Submersible connectors in accordance with UL 486D, rated 600 V, 190˚F, with integral insulation.

3.2 TESTING

A. Pre-Energization Check: Before energizing, check cable and conductors for circuit continuity and short circuits. Correct malfunctions.

B. Service Entrance and Feeder Insulation Resistance Test: Each main service entrance conductor and each feeder conductor shall have its insulation resistance tested after the installation is complete except for connection at its source and point of termination. Testing shall be performed by qualified technicians who have been trained in testing procedures and in the use of all test

equipment.

1. Make tests using a Biddle Megger or equivalent test instrument at a voltage of not less than 1000 VDC; measure resistance from conductor to conductor, conductor to neutral (if present) and from conductor to ground. Insulation resistance shall not be less than the following:

Wire Size (AWG)	Insulation Resistance (Ohms)
#8	250 K
#6 through #2	100 K
#1 through #4/0	50 K
Larger than #4/0	25 K

2. Conductors that do not meet or exceed the insulation resistance values listed above shall be removed, replaced, and retested.

C. Submittals: Contractor shall furnish instruments and personnel required for tests. Submit 4 copies of certified test results to Architect for review. Test reports shall include conductor tested, date and time of test, relative humidity, temperature, and weather conditions.

D. Voltage and Current Values: The voltage and current in each conductor shall be measured and recorded after connections have been made and the conductor is under load.

SAMPLE DC HIGH VOLTAGE CABLE TEST REPORT
(Specification Paragraph 3.2, C)

Date_____

Contract and Work Location: _____
Contract (Project) No.: ___
Circuit Identification: ____
(Dwg., Title, Number and Ckt. Number)

Test Equipment: _
(Make, Model, Serial No., Etc.)
Applied Test Voltage _____
Normal Oper. Voltage _____
Cable Installation: New _____ Used _____
(Date) (No. Years)
Cable Size _____AWG
Cable Length _____Ft.
Cable Material _____Cu _____AI
Temperature _____ Humidity _____

TEST DATA - RESISTANCE IN KILO OHMS

CONDUCTOR PER PHASE	A-N	B-N	C-N	A-G	B-G	C-G	A-B	B-C	A-C

END OF SECTION

SECTION 26 05 27

EXPANSION OF EXISTING ELECTRICAL GROUNDING SYSTEM

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Grounding shall conform to the requirements of:
   1. National Electrical Code
   2. Governing local codes
   3. Local Utility Company

B. Ground effectively and permanently.
   1. Verify existing neutral conductor bonding at the main service disconnect and at other new/relocated or reused separately derived systems.
   2. All new/relocated conduit or cable tray systems and busway
   3. All new/relocated electrical equipment and related current carrying supports or structures
   4. All new / relocated metal piping systems
   5. All new building structural metal frames

1.2 REFERENCE STANDARDS

A. ANSI/IEEE Standard 142 - "Recommended Practice for Grounding of Industrial and Commercial Power Systems."

B. ANSI/UL 467 - "Safety Standard for Grounding and Bonding Equipment."

C. Article 250 of the NEC (NFPA 70) for grounding.

D. NECA – Standard of Installation

E. NETA ATS – Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems

F. EIA / TIA 607

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Copperweld

B. nVent ERICO

C. Burndy

D. O.Z. Gedney

E. Eaton

2.2 GROUNDING ELECTRODES

A. Driven Rod Electrode
   1. 3/4" x 10'-0" copper clad grounding electrode, UL listed

2. UL listed grounding electrode connector
3. Approved thermal fusion methods (exothermic)

B. Metal Frame of Building

C. Existing grounding electrode system

2.3 DRIVEN ELECTRODE ACCESS BOX AND COVER

A. Hubbell Tier 22 FRP 20-inch round bolt down cover with “GROUND” embossed on top.

2.4 MATERIALS AND COMPONENTS

A. Reference other sections of this specifications for materials specified there.

B. Heavy-duty, copper, two bolt type, copper alloy or bronze compression lugs for grounding and bonding applications, in configurations required for particular installation.

PART 3 - EXECUTION

3.1 SYSTEMS 600 VOLTS OR LESS

A. In the existing service equipment, field verify existing condition of ground bus.
1. Field verify existing bond of the ground bus to the existing service grounding conductor, to the neutral bar.
2. Tighten existing ground lugs and connections.

B. Connect the grounding electrode conductor between the ground bus and the grounding electrode system.
1. In rigid PVC conduit.
2. Provide thermo fusion connection for each rod ground electrode.
   a. All rod electrodes shall be located outside the building in non-paved areas where available. Access cover top shall be flush with finish grade or floor.
   b. Install rod electrodes as indicated. Install additional rod electrodes as required to achieve specified resistance to ground.
   c. The minimum distance between driven ground rod electrodes shall be 10'.
3. The total ground resistance shall not exceed 10 Ohms for service entrance grounds and for equipment grounds.
   a. Where this condition cannot be obtained with one electrode, install a longer electrode, deep-driven sectional electrodes, or additional grounding electrodes until the required ground resistance is obtained.
   b. Refer to drawings for project specific ground resistance requirements.

C. Field verify the grounding electrode conductor between the ground bus and the grounding electrode systems are in compliance with the NEC.

D. Provide an insulated grounding conductor inside all new conduits, raceways, surface raceways and cables used for power distribution. The ground wire shall be bonded to each box. All bonding jumpers shall be routed inside conduit or raceway.

E. Provide an insulated, isolated equipment grounding conductor in addition to the insulated equipment grounding conductor for all isolated grounding feeders, branch circuits, outlets and receptacles.

F. Provide all new/relocated conduits terminating in switchgear, transformers, switchboards, and

panelboards with grounding bushings, where required and ground wire extended to ground bus in equipment.

G. Where modifications to the main service disconnect are required, main bus and building grounding electrode conductor installation shall be witnessed by the Architect / Engineer.

H. Interface with lightning protection system when lightning protection system is specified.

I. Locate and install anchors, fasteners, and supports in accordance with NECA “Standard of Installation”.

J. Do not fasten supports to pipes, ducts, mechanical equipment, or conduit.

K. Do not use spring steel clips and clamps.

L. Do not use powder-actuated anchors.

M. Do not drill or cut structural members.

N. Do not use compression or mechanical connectors underground.

3.2 MISCELLANEOUS REQUIREMENTS

A. Continuity of the building equipment grounding system shall be maintained throughout the project. Grounding jumpers shall be inside conduit, fittings and boxes and shall be installed across conduit expansion fittings, liquid-tight flexible metal and flexible metal conduit, light fixture pigtails in excess of 6', and other non-electrically continuous raceway fittings.

B. Grounding conductors and grounding electrode conductor shall be stranded copper conductors and run in a suitable PVC raceway. Grounding conductors and grounding electrode conductor shall be continuous, without joints or splices over their entire length, except as allowed by NFPA 70/NEC.

C. For separately derived alternating current system grounds, bond the case and neutral of each transformer secondary winding directly to the nearest available effectively grounded structural metal member as required in NEC 250.

E. Ground new and removed/replaced lighting fixture bodies to the conduit grounding system.

F. Receptacles: Provide a ground wire bonded to the conduit ground system, except where and insulated isolated grounding receptacle is specified.

G. Motor Frames: Ground the frame of each motor with a properly sized separate ground wire around flexible conduit.

H. Provide grounding access well for each new driven ground electrode, not located in manholes or pull boxes.
   1. Access well top shall be flush with finish paved surfaces.
   2. Ground access wells located in non-paved areas shall be set two-inches above surrounding finished grade. Provide 12-inch wide by 8-inch deep reinforced concrete crown around neck or opening and sloped down away from pull box opening.
   3. Provide thermal fusion (exothermic) connectors approved for direct burial.

J. Exterior Electrical Equipment Racks:
   1. Provide driven ground electrode for racks mounted remote from building structure.
   2. Where mounted on roof, ground to be building structural steel.

K. Ground connections to building steel, grounding electrodes and all underground connections shall be by thermal fusion (exothermic).

3.3 COORDINATION

A. General: Coordinate installation of grounding connections for equipment with equipment installation work.

END OF SECTION

SECTION 26 05 33

CONDUIT SYSTEMS

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Furnish and install a complete system of electrical conduits and fittings.

1.2 REFERENCE STANDARDS

A. National Electrical Code

B. Local codes and ordinances

C. UL

D. ETL

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS – Provide products manufactured in the USA

A. Raceways:
1. Allied, International Metal Hose, Ipex, Heritage Plastics, Wheatland, Can-Tex, Carlon, Certain-Teed, Anamet, Inc., Electri-Flex Co., Western Tube and Conduit
2. PVC Coated RGC: Robroy Perma Cote, Robroy Plasti-Bond, or Calbond – no exceptions
3. Stainless Steel: Robroy, Calbrite, Gibson
4. Aluminum: Penn Aluminum, American Conduit, Wheatland, Eaton B-Line, Patriot Aluminum Products
5. Reinforced Thermosetting Resin Conduit (RTRC): FRE Composites, Champion Fiberglass, United Fiberglass

B. Fittings:
1. Appleton, Crouse Hinds, Topaz, Steel City, O.Z. Gedney, Carlon, Heritage Plastics, Raco, Ipex, International Metal Hose, Lew Electric Fittings Co.
2. PVC Coated ferrous fittings: Robroy Perma Cote, Robroy Plasti-Bond, or Calbond – no exceptions
3. Stainless Steel: Robroy, Calbrite, Gibson, Crouse Hinds
4. Aluminum: Penn Aluminum, American Conduit, Wheatland, Eaton B-Line, Patriot Aluminum Products
5. Reinforced Thermosetting Resin Conduit (RTRC): FRE Composites, Champion Fiberglass

C. Condulets and Conduit Bodies:
1. Appleton, Form 85
2. PVC Coated: Robroy Perma-cote or Plasti-Bond, – no exceptions
3. Stainless Steel: Robroy, Calbrite, Gibson, Crouse Hinds
4. Reinforced Thermosetting Resin Conduit (RTRC): FRE Composites, Champion Fiberglass

D. Steel MC Cable for light fixture whips:
1. AFC
2. Southwire
3. General Cable

4. Kaf-Tech

2.2 GENERAL

A. The minimum conduit size shall be ¾-inch unless indicated otherwise in Divisions 26, 27 or 28.
   1. Branch Circuits: Minimum conduit size shall be ¾-inch.
   2. Feeder Circuits: Minimum conduit size shall be ¾-inches.
   3. Technology, telecommunications, and low voltage systems: The minimum conduit size shall be ¾-inches unless noted or indicated otherwise.
   4. The minimum conduit size between buildings for technology, voice, data, fire alarm, video, security, surveillance, BMCS, and other telecommunications shall be 2-inch unless indicated otherwise.

B. The minimum conduit size for flexible metallic conduit for tap connections to individual light fixtures shall be ½ inch, or steel metal clad (MC) cable with insulated ground conductor maximum 6 feet.

C. Electrical nonmetallic tubing, flexible polyethylene or PVC tubing shall not be used on this project.

D. BX and AC cable shall not be used on this project.

E. PVC elbows shall not be used on this project.

F. Intermediate metal conduit (IMC) shall not be used on this project.

2.3 RIGID METAL CONDUIT

A. UL labeled, Schedule 40:
   1. Mild steel pipe, zinc coated inside and out
   2. Aluminum Alloy 6063, T-1 temper
   3. Threaded ends
   4. Insulated bushings

B. Fittings shall meet the same requirements as rigid metal conduits.
   1. UL labeled
   2. Threaded fittings

2.4 ELECTRICAL METALLIC TUBING (EMT)

A. UL labeled, standard weight:
   1. Cold rolled steel tubing, zinc coated inside and out
   2. Aluminum Alloy 6005, 6063. Temper T-1

B. Fittings shall meet the same requirements as EMT conduits.
   1. UL labeled
   2. Insulated throat connectors
   3. Steel fittings with setscrews with lock nuts on threaded ends, no snap locks
   4. Cast metal fittings are not approved
   5. Uni-couple type connectors are not approved
   6. Split ring, anti-short bushings are not approved

2.5 RTRC CONDUIT FITTINGS AND CONDUIT BODIES

A. UL listed

B. Standard wall thickness sizes ¼-inch through 4-inch

C. Underground medium wall thickness sizes 5 and 6-inch

D. Conduit interface joints above grade, gasket joint below grade

E. Extra heavy wall for above ground and/or UL Class 1 Division 2 and Class 1 Zone 2 applications.

2.6 PVC COATED RIGID STEEL WITH URETHANE INTERIOR COATING

A. The PVC coated galvanized rigid conduit and fittings must be ETL Listed and Verified. The PVC coating must have been investigated and verified by ETL as providing the primary corrosion protection for the rigid metal conduit. Ferrous fittings for general service locations must be ETL Listed with PVC as the primary corrosion protection. Hazardous location fittings, prior to plastic coating must be UL listed for the hazard conditions to which they are to be used. All conduit and fittings must be new, unused material. Applicable UL standards may include UL 6 Standard for Safety, Rigid Metal Conduit, and UL514B Standard for Safety, Fittings for Conduit and Outlet Boxes.

B. The PVC coated galvanized rigid conduit and fittings must be ETL Verified to the Intertek ETL SEMKO High Temperature H_2O PVC Coating Adhesion Test Procedure for 200 hours. The PVC coated galvanized rigid conduit must bear the ETL Verified PVC-001 label to signify compliance to the adhesion performance standard.

C. The conduit shall be hot dip galvanized inside and out with hot galvanized threads.

D. A PVC sleeve extending one pipe diameter or two inches, whichever is less, shall be formed at every female fitting opening except unions. The inside sleeve diameter shall be matched to the outside diameter of the conduit.

E. The PVC coating on the outside of conduit couplings shall have a series of longitudinal ribs 40 mils in thickness to protect the coating from tool damage during installation.

F. Form 8 Condulets, ½-inch through 2-inch diameters, shall have a tongue-in-groove gasket to effectively seal against the elements. The design shall be equipped with a positive placement feature to ease and assure proper installation. Certified results confirming seal performance at 15 psig (positive) and 25 inches of mercury (vacuum) for 72 hours shall be available.

G. Form 8 Condulets shall be supplied with plastic encapsulated stainless-steel cover screws.

H. A urethane coating shall be uniformly and consistently applied to the interior of all conduit and fittings. This internal coating shall be a nominal 2 mil thickness. Conduit or fittings having areas with thin or no coating shall be unacceptable.

I. The PVC exterior and urethane interior coatings applied to the conduit shall afford sufficient flexibility to permit field bending without cracking or flaking at temperatures above 30°F (-1°C).

J. All male threads on conduit, elbows and nipples shall be protected by application of a urethane coating.

K. All female threads on fittings or conduit couplings shall be protected by application of a urethane coating.

L. Independent certified test results shall be available to confirm coating adhesion under the following conditions
   1. Conduit and condulet exposure to 150°F (65°C) and 95% relative humidity with a

minimum mean time to failure of 30 days. (ASTM D1151)

2. The interior coating bond shall be confirmed using the Standard Method of Adhesion by Tape Test (ASTM D3359).
3. No trace of the internal coating shall be visible on a white cloth following six wipes over the coating which has been wetted with acetone (ASTM D1308).
4. The exterior coating bond shall be confirmed using the methods described in Section 3.8, NEMA RN1. After these tests the physical properties of the exterior coating shall exceed the minimum requirements specified in Table 3.1, NEMA RN1.

M. Right angle beam clamps and U bolts shall be specially formed and sized to snugly fit the outside diameter of the coated conduit. All U bolts shall be provided with plastic encapsulated nuts that cover the exposed portions of the threads.

N. All fittings, clamps, straps, struts, and hardware used with PVC coated conduit shall be PVC coated or 316 stainless steel

2.7 STEEL FLEXIBLE CONDUIT

A. Steel flexible metallic conduit:
   1. Zinc coated inside and out
   2. 18-inches minimum length, 24-inches maximum length

B. Steel flexible metallic conduit for tap connections to light fixtures where steel MC Cable fixture whips are not used:
   1. 18 inches minimum length; 6 feet maximum length

C. Liquid tight flexible steel conduit
   1. Type L.A. - Grounded - UL Approved
   2. 18-inches minimum length, 24-inches maximum length

2.8 PVC CONDUIT

A. UL labeled Schedule 40 and Schedule 80

B. PVC fittings and solvent welded joints

C. Acceptable PVC condulet manufacturer: Ipex, Cantex

2.9 CONDULETS AND CONDUIT BODIES

A. UL Labeled

B. Form 85

C. PVC Coated: Form 8

D. LBC Condulets shall be used for size 2 inch and above.

E. LL and LR Condulets shall not be used for 2 inch and above

2.10 ROOF MOUNTED CONDUIT AND BOX SUPPORTS

A. Conduit supports and pads suitable for direct sunlight, conduit size, weight, quantity and roof system with unistrut supports and accessories. Conduit supports shall allow for conduit expansion and contraction.

B. Refer to roofing specifications for additional information. The limitations and restrictions contained in any roofing specification shall prevail and supercede these specifications for roof mounted supports for conduits and boxes.

C. Approved Manufacturer:
   1. Portable Pipe Hangers
   2. Eaton B-Line
   3. Miro Industries, Inc.

2.11 ALUMINUM CONDUIT

A. UL Labeled

B. Aluminum fittings shall meet the same requirements of aluminum conduits, compatible steel fittings.
   1. UL Labeled for use with aluminum conduit.

2.12 STAINLESS STEEL CONDUIT

A. UL Labeled

B. Rigid Stainless Steel:
   1. Type 304 Stainless Steel
   2. Threaded ends
   3. Insulated Bushings

C. EMT:
   1. Type 304 Stainless Steel
   2. Compression Fittings
   3. Insulated Bushings

D. Fittings, elbows, nipples, strut, device box, clamps straps, etc.
   1. Type 304 Stainless Steel

2.13 ELECTRICAL NON-METALLIC TUBING (ENT)

A. UL labeled Schedule 40

B. PVC fittings and solvent welded joints

C. Acceptable manufacture: Carlon

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install electrical conduits and fittings for all wiring of any type unless specifically specified or instructed to do otherwise. Install conduits and fittings in accordance with local codes and applicable sections of the NECA “Standard of Installation”, concealed where possible.
   1. Fasten conduit supports to building structure and surfaces; do not support to roof deck.
   2. Arrange supports to prevent misalignment during wiring installation.
   3. Do not support conduit with wire or perforated pipe straps. Remove wire used for temporary supports.
   4. Do not attach conduit to ceiling support wires.
   5. Arrange conduit to maintain head room and present neat appearance.
   6. Maintain 4-inch clearance between conduit and rooftop surfaces.

7. Cut conduit square using saw or pipe cutter; de-burr cut ends.
8. Bring conduit to shoulder of fittings; fasten securely.
9. Conduit penetrations to all individual motor controllers, VFDs, and motor control cabinets shall only be made at the bottom of the enclosure. For other equipment, provide listed water sealing conduit hubs to fasten conduit to sides or tops of electrical equipment enclosures, device box, gutter, wireway, disconnect, etc.
10. Use suitable caps to protect installed conduit against entrance of dirt and moisture.
11. Ground and bond conduit as required.
12. Identify conduit as required.
13. Route all conduits above building slab perpendicular or parallel to building lines.
14. Do not use no-thread couplings and connectors for galvanized steel, PVC coated galvanized steel, or aluminum rigid conduit.

B. Group related conduits; support using conduit rack. Construct rack using steel channel; provide space on each for 25 percent additional conduits.

C. In areas where raceway systems are exposed and acoustical or thermal insulating material is to be installed on walls, partitions, and ceilings, raceways shall be blocked out proper distance to allow insulating material to pass without cutting or fitting. Also provide Kindorf galvanized steel channels to serve as standoffs for panels, cabinets and gutters.

D. Securely fasten conduits, supports and boxes, to ceiling (not roof deck), walls, with Rawl Plugs or approved equal anchors. Use lead cinch anchors or pressed anchors. Use only cadmium plated or galvanized bolts, screws. Plastic anchors and lead anchors shall not be used for overhead applications.

E. Provide separate raceway systems for each of the following when specified, indicated or required:
1. 120/208 volt circuits
2. 277/480 volt circuits
3. Emergency
    a. Life safety branch
    b. Critical branch
    c. Equipment branch
4. Voice/Data
5. Sound reinforcement
6. Theatrical and Architectural Dimming Controls
7. MATV/CATV
8. Security CCTV
9. Security System
10. Communications / PA Systems / Sound System Line Input and Speakers
11. Fire Alarm
12. Lighting and Building Management Control Systems

F. Unless shown otherwise, do not install conduit in or below concrete building slabs.

G. Unless shown otherwise, do not install conduit horizontally in concrete slabs.

H. Roof penetrations shall be made in adequate time to allow the roofing installer to make proper flashing. Conduit for equipment mounted on roof curbs shall be routed through the roof curb. Conduit, gutters, pull boxes, junction boxes, etc. shall not be routed on roof unless specified otherwise. Where specifically indicated to be routed or mounted on the roof, supports shall be as specified, as recommended by roofing manufacturer and roof support manufacturer and as required by NEC. Place supports every five feet along conduit run and within 3 feet of all bends, condulets, and junction boxes. Provide roofing pad under stands at directed by Architect and as recommended by roofing manufacturer and roof support manufacturer. Provide additional unistrut supports and accessories as required.

I. PVC coated conduit shall have all nicks and cuts to the protective coating repaired using manufacturer's approved touch-up material as recommended by manufacturer. Provide a minimum of two-wraps of 3M-50 type tape over touch-up.

J. Installation of the PVC Coated Conduit System shall be performed in accordance with the Manufacturer's Installation Manual. To assure correct installation, the installer shall be certified by Manufacturer to install coated conduit. Submit copies of training certification with submittal. Contractor shall coordinate installation with manufacturer's representative for field training and observation of installed PVC coated rigid galvanized conduit and fittings. Manufacturer's representative shall certify the installation is in accordance with manufacturer's installation instructions. Submit copies of installation certification prior to cover-up of underground installation.

K. All conduit terminations at locations including but not limited to, switchgear, pull boxes, outlet boxes, stub-up, and stub-outs:
1. Provide insulated throat connectors for EMT conduits.
2. Provide insulated bushing on all rigid conduit terminations.
3. Provide locknuts inside and outside of all boxes and enclosures.
4. Provide threaded type plastic bushing at all boxes and enclosures

L. In suspended ceilings, support conduit runs from the structure, not the ceiling system construction.
1. Do not support from structural bridging.
2. Do not support from metal roof deck.

M. Completely install each conduit run prior to pulling conductors. All boxes are to be accessible after completion of construction.

N. All conduits must be kept dry and free of water or debris with approved pipe plugs or caps. Cap or plug conduit ends prior to concrete pours.

O. Ream ends of conduits after cutting and application of cutting die to remove rough edges.

P. Install all above concrete slab conduits perpendicular or parallel to building lines in the most direct, neat and workmanlike manner.
1. Cable Tension:
   a. 0.008 lb./cmil for up to 3 conductors, not to exceed 10,000 pounds.
   b. 0.0064 lb./cmil for more than 3 conductors, not to exceed 10,000 pounds
   c. 1000 lbs. per basket grip.
2. Sidewall pressure: 500 lbs./ft.
3. Conduit runs within the following limits of bends and conduit length between pull points shall not exceed the above installation pulling tension and sidewall pressure limits.
   a. Three (3) equivalent 90-degree bends: not more than fifty feet (50') between pull points.
   b. Two (2) equivalent 90-degree bends: not more than one hundred feet (100') between pull points.
   c. One (1) equivalent 90-degree bend: not more than one hundred fifty feet (150') between pull points.
   d. Straight pull: not more than two hundred feet (200') between pull points.
4. Indicate sizes of conduits, wireway sections, and cable tray sections on the as-built drawings.
5. Hold horizontal and vertical conduits as close as possible to walls, ceilings and other elements of the building construction. Conduits shall be kept a minimum of 6 inches clear of roof deck / insulation, and 2 inches clear of above floor deck / insulation.
6. Install conduits to conserve building space and not obstruct equipment service space or interfere with use of space. Conduit shall not be routed on floors, paved areas or grade.

7. Where a piece of equipment is wired from a switch or box on adjacent wall, the wiring shall go up the wall from the box, across at or near the ceiling, and back down to the equipment. Wiring shall not block the walkway between wall and equipment.
8. Horizontal runs of conduit on exposed walls shall be kept to a minimum.
9. Conduit for mechanical / plumbing equipment installed outdoors shall be routed with the associated mechanical / plumbing pipe support rack system where practical, coordinate with Divisions 22 and 23.
10. Conduits installed in public areas, not concealed by architectural ceilings, shall be supported by galvanized steel channel racks to bottom of roof deck or floor deck. Conduits shall be grouped for neat workman-like appearance.

Q. Install expansion and deflection fittings and bonding jumpers on straight runs which exceed 200-feet, on center, and at 200-feet maximum, on center, on straight runs which exceed 400-feet, and where conduits cross building expansion joints.

R. Provide grounding bushings at concentric/eccentric knockouts or where reducing washers are used.

S. Run conduit to avoid proximity to heat producing equipment, piping surfaces with temperatures exceeding 104 degrees F., and flues, keeping a minimum of 13-inches clear.

T. Install conduit as a complete system, without conductors, continuous from outlet to outlet and from fitting to fitting. Make up threaded joints of conduit carefully in a manner to ensure a tight joint. Fasten the entire conduit system into position. A run of conduit between outlet and outlet, between fitting and fitting, or between outlet and fitting shall not contain more than the equivalent of four quarter bends, including those bends located immediately at the outlet or fitting.

U. Conceal conduit systems in finished areas. Conduit may be exposed in mechanical and electrical rooms, and where otherwise shown or indicated only. Run the conduit parallel and perpendicular to the structural features of the building and support with malleable iron conduit clamps at intervals as required by NEC or on conduit racks, neatly racked and bent in a smooth radius at corners.

V. Conduit bends shall be factory elbows or shall be bent using equipment specifically designed to bend conduit of the type used to maintain the conduit's UL listing. Conduit hanger spacing shall be 10 feet or less and as required by the NEC for all conduit. Beam clamp attachments to steel joist chords is prohibited. Beam clamps may only be used at beams, no exceptions. Connections to joists shall be made with galvanized channel extended between joist chords or with galvanized channel bearing on the vertical legs of joist chord angles.

W. Support conduit on galvanized channel, using compatible galvanized fittings (bolts, beam clamps, and similar items), and galvanized threaded rod pendants at each end of channel and secure raceway to channel and channel to structure. Where rod pendants are not used, channel supports are to be secured to structure at each end. Conduit supports are to be secured to structure using washers, lock washers, nuts and bolts or rod pendants; use of toggle bolt "wings" are not acceptable. Support single conduit runs using a properly sized galvanized conduit hanger with galvanized closure bolt and nut and threaded rod. Raceway support system materials shall be galvanized and manufactured by Kindorf, Unistrut, Superstrut, Caddy, or Spring Steel Fasteners, Inc. Provide chrome or nickel-plated escutcheon plates on conduit passing through walls and ceilings in finished areas. Do not support conduit from other conduit, structural bridging or fire rated ceiling system. Do not support more than one conduit from a single all-thread rod support. Provide electrical insulating sleeve or wrapping for aluminum conduit supported by zinc coated supports or fasteners. Channel supports shall have cut ends filed smooth. When installed outside of the building, or in areas subject to moisture, the cut ends shall be painted with ZRC galvanized paint or equivalent.

X. Terminate all motor connection conduits in mechanical room spaces with a floor pedestal and with "Tee" conduit at motor outlet height for flexible conduit.

Y. Where conduit is not embedded in concrete or masonry, conduit shall be firmly secured by approved clamps, half-straps or hangers. Tie wire and short pieces of conduit used as supports and or hangers are not approved.

Z. Where "LB" condulets are used, 2-inches and larger shall be type "LBD".

AA. No more than 12 conduits containing branch circuits may be installed in junction boxes, pull boxes or gutters.

BB. Flexible metal conduit and liquid tight flexible metal conduit shall only be used for final connections from junction box to equipment, light fixtures, power poles, etc. They are not to be used in lieu of conduit runs. They shall not be used for wall or roof penetrations unless they are installed in a PVC coated RGC conduit sleeve at least one size larger than the OD of the flexible conduit.

CC. Where 3-1/2-inch conduit is specified and the required or specified material is Schedule 80 PVC, provide 4-inch conduit.

DD. "Daisy Chaining" light fixtures installed for lay-in ceiling areas is not allowed. Each light fixture shall have its own fixture whip from junction box. The only exception being light fixtures installed end to end using chase nipples between them, or light fixtures recessed in non-accessible ceilings.

EE. In above ceiling applications, do not install raceways, junction boxes, gutters, disconnects, etc. within 36 inches directly in front of HVAC control boxes or other equipment requiring access from a point starting from the top of control box / equipment down to ceiling.

FF. Do not install conduit, junction boxes, etc. within 18 inches of outside edges of roof access openings.

GG. Install minimum size 2-inch nipple, at least one, between multi-sectional panels for branch circuit independent of feeder conductors.

3.2 CONDUITS

A. Conduit above grade indoors:
   1. Concealed Conduits: EMT with set screw fittings
   2. Exposed conduits:
      a. Below nine feet AFF where not directly attached and against building walls, ceiling, or structure: Rigid metal conduit or x-wall RTRC.
      b. Where subject to physical damage: Rigid metal conduit or x-wall RTRC.
      c. Wet locations: PVC coated galvanized rigid steel or aluminum conduit
      d. Damp Locations: Aluminum rigid conduit or x-wall RTRC.
      e. Exposed conduits in mechanical rooms or electrical rooms shall be rigid galvanized steel or x-wall RTRC when installed below 18-inches above finished floor.

B. Conduit installed above grade outdoors:
   1. Galvanized rigid steel or x-wall RTRC for conduits up utility poles and where subject to physical damage or where located less than four feet above finished floor.
   2. Aluminum or x-wall RTRC where not subject to physical damage and where located four feet above finished floor.

C. Conduit where indicated underground:

1. PVC Coated Galvanized rigid steel or RTRC conduit elbows and Schedule 80 PVC, RTRC, or PVC coated galvanized steel straight run conduits. PVC conduits for underground branch circuits shall be Schedule 80 or Schedule 40 PVC.
    a. PVC conduit and fittings shall be used only for straight horizontal runs and for vertical risers at site lighting pole bases. Bending straight sections of PVC conduit to less than 25-foot radius or the use of PVC factory bends is not allowed.
    b. Change in direction of conduit runs, either vertical or horizontal, shall be with RTRC or PVC coated galvanized steel elbows or long sweep bends of straight PVC conduit sections. Long sweep bends of straight PVC 20-foot sections shall have a minimum radius of curvature of 25 feet and a maximum arc of 22.5degrees. Multiple long sweep bends of straight PVC sections shall be separated by a minimum of 20-feet of straight, linear, PVC sections.
    c. Provide RTRC or PVC coated rigid galvanized steel conduit elbows and fittings with urethane interior coating at all changes in direction with radius of less than 25-feet and at all vertical runs to 18 inches above finished floor elevation. For interior slab penetrations, provide continuous RTRC or PVC coated rigid galvanized steel conduit and fittings with urethane interior coating from change in direction to 18 inches above finished floor elevation, except where stubbed-up under and inside equipment or switchgear where conduit shall be terminated at minimum two inches above concrete housekeeping pad.
    d. Elbows for underground electrical service entrance, feeders, transformer primary / secondary, telecommunication, and low voltage conduits shall be RTRC or PVC coated rigid galvanized steel with long radius as follows:
        1) Up to 1-inch conduit, minimum 12-inch radius.
        2) 1.5-inch conduit, minimum 18-inch radius.
        3) 2-inch conduit, minimum 24-inch radius.
        4) 2.5-inch conduit, minimum 30-inch radius.
        5) 3-inch conduit, minimum 36-inch radius.
        6) 3.5 to 6-inch conduit, minimum 48-inch radius.
    e. Conduit for all floor boxes shall be routed below building slab from floor box to nearest column, wall, or as indicated.
    f. Conduits shall not be routed horizontally in building slab, grade beams or pavement.
2. Encase all underground conduits in concrete.
    a. Concrete shall be tinted red throughout with a ratio of 10 pounds of dye per yard of concrete unless prohibited by utility for utility conduits. Concrete encasement for utility installed conductors shall be as specified by the utility and comply with their standards and specifications. Where utility does not require but allows concrete encasement of conduits, provide concrete encasement as specified herein.
    b. Provide minimum 3-inch concrete encasement around conduits.
    c. Provide conduit spacers for parallel branch/feeder conduits.
    d. When prior written approval from Owner and Architect to omit concrete encasement of conduits below building slab is given, conduits either specified or approved in writing to be routed under building slab without concrete encasement for electrical branch circuits or voice / data / video / communications horizontal drops or outlets shall be installed 18 inches below finished floor and on select fill. All other conduits, including but not limited to electrical feeders, voice / data / video / communications vertical, riser, tie, trunk, or service cable conduits shall be installed 48-inches below finished floor and on select fill.
    e. Use suitable manufactured separators and chairs installed 4 feet on centers. Securely anchor conduit at each chair to prevent movement during backfill placement.
3. Install building voice / data / video / communications main service conduits and electrical

service transformer primary and secondary conduits with top of concrete encasement minimum 48-inches below finished grade or pavement. Voice / data / video / communications conduits and electrical service primary conduits for utility owned electrical service transformers shall also comply with the respective utility company requirements and standards. All other underground conduits outside of building other than voice / data / video / communications main service conduits and electrical service transformer primary and secondary conduits shall have top of concrete encasement at 36 inches minimum below finished grade or pavement.

4. Provide two "caution" plastic tapes at 6-inches and 18-inches below finished slab, grade, or pavement; identify as specified in Section 26 05 00.
5. Conduits located outside building, provide magnetic locator tape at top of first compacted layer of backfill or concrete.
6. During construction, partially completed underground conduits shall be protected from the entrance of debris such as mud, sand, and dirt by means of conduit plugs. As each section of the underground conduit is completed, a testing mandrel with diameter ¼-inch smaller than the conduit, shall be drawn through each conduit. A brush with stiff bristles shall be drawn through until conduit is clear of particles of earth, sand, or gravel. Conduit plugs shall then be installed.
7. Utility underground conduit for Utility Company cable shall be installed per Utility Company standards, and their specifications for this project.
8. Concrete shall be Portland Cement conforming to ASTM-C-150, Type 1, Type III or Type V if specified. Cement content shall be sufficient to product minimum strength of 2,500 PSI.
9. Contractor shall stake out routing and location of underground conduits using actual field measurements. He shall obtain approval of the Owner and Architect before beginning trenching, horizontal drilling, and excavation.
10. Verify location and routing of all new and existing underground utilities with the Owner and Architect on the job site. Stake out these existing utilities so that they will not be damaged. Stake out new utilities to provide coordination with other trades and with new and existing utilities, easements, property lines, restricted land use areas, and right-of-ways. Verify existing public utilities with Call811.

D. Conduit shown in concrete walls, floor or roof slab:
   1. PVC Coated Galvanized Rigid steel.

E. Conduits that penetrate concrete slab, or within 100 feet of cooling towers, or at designated corrosive locations.
   1. RTRC
   2. PVC coated galvanized rigid steel

F. Connections to equipment mounted on roof, rotating equipment, transformers, and kitchen or food processing equipment, or where flexible conduit is required outdoors.
   1. Liquid tight flexible metal conduit (1/2 inch may be used for roof top supply / exhaust fans only)
   2. Liquid tight flexible metal conduit for 24-inch maximum length
   3. Conduit for roof-mounted equipment shall be routed inside the roof curb assembly roof opening. Provide permanent lock-off device at panelboard circuit breakers serving roof equipment and accessories to enable tag-out procedures for all power routed through roof curb and to the roof mounted equipment and accessories.

G. Light fixture whips:
   1. Accessible ceilings and open structure: ½-inch flexible steel conduit or steel MC cable, length not to exceed 6-feet.
   2. Non-accessible ceilings: ½-inch flexible steel conduit. Length as required to make a tap at an accessible j-box. Recessed light fixtures in non-accessible ceilings may be daisy chained using the light fixture's integral, UL listed j-box or internal wire way that is

accessible through fixture from below the ceiling.

3. Dedicated insulated ground wire.
4. Light fixture whips shall not rest on ceiling grid or tile.
5. Light fixture whips shall not be supported from the ceiling suspension system. Support from the structure with #13 AWG galvanized iron wire pendants and Caddy clips. Do not support conduit from structural bridging. Flexible conduit and steel MC cable shall be kept a minimum of 2 inches clear of roof deck.

3.3 CONDUIT PENETRATIONS, SLEEVES AND ESCUTCHEONS

A. Furnish sleeves for placing in construction for all conduit passing through concrete or masonry walls, partitions, beams, all floors other than grade level, and roofs. A conduit sleeve shall be one size larger than the size of conduit, which it serves except where larger sizes are required for manufactured water, fire, or smoke stop fittings.

1. Sleeves set in concrete floor construction shall be minimum Schedule 40 galvanized steel.
2. Sleeves shall extend 3-inches above the finished floor.

B. Sleeves in concrete or masonry walls shall be RTRC or Schedule 40 galvanized steel. Sleeves shall be set flush with finished wall.

C. Install manufactured UL listed water, fire, and smoke stop fittings, or caulk around conduit or cables in sleeves with sufficient UL listed fire safe insulation or foam to maintain wall or floor slab fire or smoke rating. Refer to Architecture drawings for locations of rated walls.

D. Provide Linkseal Mechanical Seals around conduit penetrations through walls below grade. Provide a pull box to install a water stop inside wall penetration. Internally seal low voltage cabling conduit penetrations with waterproof caulking.

E. Sleeves penetrating walls below grade shall be Schedule 40 black steel pipe with ¼-inch thick steel plate secured to the pipe with continuous fillet weld. The plate shall be located in the middle of the wall and shall be 2-inches wider all around than the sleeve that it encircles. The sleeve should extend a minimum of 24-inches on either side of the penetration. The entire assembly shall be hot-dipped galvanized after fabrication. Do not sleeve or penetrate grade beams.

F. Conduit passing through the housing on connected equipment shall pass through a cleanly cut hole protected with a threaded steel bushing. Route conduit through roof openings, for piping and ductwork or through suitable roof jack, with pitch pocket. Coordinate location with roofing installation as required.

G. Conduit passing through fire rated wall shall be sealed with Fire Stop. Route conduit to preserve fire resistance rating of partitions and other elements, using materials and methods under the provisions of Division 7.

3.4 POWER DISTRIBUTION UNDERGROUND FEEDER CONDUIT AND UNDERGROUND SERVICE ENTRANCE CONDUIT

A. Power underground feeder and service entrance shall be of individual conduit encased in concrete. Unless shown otherwise, the type of conduit used shall not be mixed in any one underground conduit and shall be the size indicated on the drawings. The concrete encasement surrounding the underground conduit shall be rectangular in cross-section, having a minimum concrete thickness of 3-inches, except that conduit for 120V and above shall be separated from control and signal conduits by a minimum concrete thickness of 3-inches. Encasement concrete shall be tinted in red.

B. During construction, partially completed underground conduits shall be protected from the entrance of debris such as mud, sand, and dirt by means of conduit plugs. As each section of the

underground conduit is completed, a testing mandrel shall be drawn through until each conduit is clear of particles of earth, sand, or gravel. Conduit plugs shall then be installed.

C. Furnish the exact dimensions and location of power underground conduit to be encased in time to prevent delay in the concrete work.

D. Conduit for service entrance underground conduits shall be as indicated on the drawings.

E. Primary power underground conduit shall be installed in accordance with utility company standards and the utility company specifications for this project.

3.5 TELECOMMUNICATIONS, LOW VOLTAGE AND EMPTY CONDUIT SYSTEM RACEWAYS

A. Conduit shall be installed in accordance with the specified requirements for conduit and with the additional requirements that no length of run shall exceed 100-feet for 1 inch or smaller trade sizes and shall not contain more than two 90-degree bends or the equivalent. Pull or junction boxes shall be installed to comply with these requirements. Provide plastic bushings at all conduit terminations. Provide a grounding bushing on each data and voice conduit.

B. Conduits shall be installed from outlet box to above an accessible ceiling. All cables routed through open spaces (no-ceiling below roof deck or above floor deck) shall be routed in conduit. Telecommunications systems, CATV, CCTV, fire alarm and BMCS cables can be installed above accessible ceilings without conduit. Cables installed above accessible ceiling shall be plenum rated. Conduit rough in of these cables shall include a 90-degree turn-out to an accessible location with insulated bushings on the end of the conduit.
   1. Provide conduit from each telecommunications outlet box to accessible ceiling plenum.
   2. Provide conduit from each security / surveillance device outlet box to accessible ceiling plenum.
   3. Provide two conduits for each multi-media outlet box and each outlet box indicated to contain more than four data, audio, or video drops to accessible ceiling plenum.
   4. Provide the following minimum conduits for telecommunications and multi-media wall, floor, and ceiling mounted outlet boxes. Use the largest diameter conduit indicated below unless instructed otherwise in writing from the Architect:
      a. Non-masonry outlet box: Two 1-inch conduits.
      b. Masonry outlet box: Two 1-inch conduits, or three 3/4-inch conduits.
      c. Where indicated differently on plans or where conflicts arise, notify the Architect / Engineer prior to installation.

C. All conduit in which cable is to be installed by others shall have pull string installed. The nylon pull string shall have not less than 200 lb. tensile strength. Not less than 12-inches of slack shall be left at each end. Provide blank cover plate before substantial completion if box is for a future installation after substantial completion of the project. Conduit shall extend to a minimum six inches above nearest accessible ceiling and be turned horizontally with plastic bushing at terminations.

D. Conduits for Building Entrance Facilities:
   1. Underground Outside Plant: Install a pull box every 300-feet or after 180 degree turns.
   2. Inside Plant: Install a pull box every 150-feet or after 180 degree turns. All turns shall be large sweeps, not sharp 90s, with the radius of the sweep at least 10X the diameter of the conduit. Hence, a 4-inch conduit requires a 40-inch minimum radial sweep. If field conditions absolutely mandate a sharp 90-degree bend to be installed, then a pull box shall be installed at that location regardless of distance.
   3. Building entrance facilities shall not terminate in an IDF or any other space except the MDF.
   4. Coordinate the termination location of the building entrance facilities in the MDF with the room layout and equipment configuration.

5. Provide 4-inch conduit unless indicated otherwise. Provide (3) fabric innerducts in each 4-inch conduit.

3.6 IDENTIFICATION

A. Conduit Systems: Provide adequate marking of conduit larger than one inch exposed or concealed in interior accessible spaces to distinguish each run as either a power (120/208V or 277/480V) or signal / telecommunication conduit (Fire Alarm, BAS, BMCS, Security, CCTV, Access Control, Intrusion Detection, Telecom, etc.). Except as otherwise indicated, use orange banding with black lettering. Provide self-adhesive or snap-on type plastic markers. Locate markers at ends of conduit runs, near switches and other control devices, near items of equipment served by the conductors, at points where conduit passes through walls or floors or enters non-accessible construction, and at spacing of not more than 50-feet along each run of exposed conduit. Switch-leg conduit and short branches for power connections need not be marked, except where conduit is larger than 1-inch.

END OF SECTION

SECTION 26 05 35

ELECTRICAL CONNECTIONS FOR EQUIPMENT

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Electrical connections as required and scheduled, and as specified.

1.2 RELATED WORK

A. Refer to other Divisions for specific individual equipment electrical requirements.

1.3 QUALITY ASSURANCE

A. UL Label: Products shall be UL listed to the extent possible.

PART 2 - PRODUCTS

2.1 MATERIALS AND COMPONENTS

A. General: For each electrical connection indicated, provide a complete assembly including, but not limited to, pressure connectors, terminals (lugs), electrical insulating tape, heat-shrinkable insulating tubing, cable ties, solderless wire nuts, and other items and accessories needed to complete splices and terminations.

B. Raceways: Refer to related sections.

C. Conductors and Connectors: Refer to related section. Conductors at equipment terminations shall be copper.

D. Terminals: Provide electrical terminals as indicated by the terminal manufacturer for the application.

PART 3 - EXECUTION

3.1 INSTALLATION OF ELECTRICAL CONNECTIONS

A. General: Install electrical connections as shown, in accordance with applicable portions of the NECA Standard of Installation, and industry practices.

B. Conductors: Connect electrical power supply conductors to equipment conductors in accordance with equipment manufacturer's written instructions and wiring diagrams. Where possible, match conductors of the electrical connection for interface between the electrical supply and the installed equipment.

C. Splice Insulation: Cover splices with electrical insulation equivalent to, or of a higher rating than, insulation on the conductors being spliced.

D. Appearance: Prepare conductors by cutting and stripping covering, jacket, and insulation to ensure a uniform and neat appearance where cables and wires are terminated.

E. Routing: Trim cables and wires to be as short as practical. Arrange routing to facilitate inspection, testing, and maintenance.

F. Motor Connections: Where possible, terminate conduit in conduit boxes at motors. Where motors are not provided with conduit boxes, terminate the conduit in a suitable condulet, and make motor connections. Conduit passing through the housing on connected equipment shall pass through a cleanly cut hole protected with an approved grommet. For all AHU or fan motors and all other motors 10 HP and larger, at the motor connection do not use wire nuts. Provide copper alloy split bolt connectors or compression lugs and bolts. Insulate connection with Scotch Super 88 vinyl electrical tape over rubber tape, or Tyco Gelcap Motor Connection Kit.

G. Conduit connections to equipment including, but not limited to, Variable Frequency Drives, Manual and Automatic Transfer Switches, Surge Suppression Devices, motor controllers, electrical disconnects, food service / processing equipment, electronics, control panels and Owner furnished equipment:

1. Make conduit penetrations only at the bottom flat surface of the equipment and only where permitted by the equipment manufacturer to avoid un-intentional water entry. Coordinate installation of electrical connections for equipment with equipment installation work. Where equipment manufacture does not permit a bottom conduit entry, verify with Owner/Engineer and locate the conduit entry at the side surface as close as possible to the bottom of the enclosure.
2. Where conduit originates from an elevation above the conduit entry, provide a “T” condulet below the enclosure’s bottom elevation. Provide conduit from the condulet up to the enclosure bottom horizontal surface for electrical connection.

H. Identification: Refer to Electrical General Provisions for identification of electrical power supply conductor terminations with markers approved as to type, color, letter and marker size by the Architect. Fasten markers at each termination point, as close as possible to each connecting point.

I. Equipment and Furnishings: Refer to other Divisions. Coordinate power and control provisions shown for equipment and furnishings with the provisions required for the furnished equipment and furnishings. Where the power and control requirements are less than or equal to those specified, modifications to power and control provisions shall be made at no cost as a part of coordination. Where power and control requirements are in excess of those shown, notify the Architect in writing of the requirements.

END OF SECTION

SECTION 26 05 37

ELECTRICAL BOXES AND FITTINGS

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Provide electrical box and fitting work as required, scheduled, indicated, and specified.

1.2 QUALITY ASSURANCE

A. UL Label: Electrical boxes and fittings shall be UL listed.

PART 2 - PRODUCTS– Provide products manufactured in the USA

2.1 FABRICATED MATERIALS

A. Interior Outlet Boxes: Provide galvanized steel interior outlet wiring boxes, of the type, shape, and size, including depth of box, to suit respective locations and installation. Construct with stamped knockouts in back and sides. Provide gang boxes where devices are shown grouped. Single box design; sectional boxes are not acceptable, except for wall mounted electronic displays.
   1. Type of Various Locations:
      a. Wall mounted interactive media boards, video displays, televisions, electronic signage and similar installations; recessed wall mounted box for power and/or multi-media (low voltage) outlets: Arlington Industries #TVBS 613, 4-gang steel box with white trim plate.
      b. Technology, data, voice, video and multi-media outlet boxes at locations other than wall mounted interactive media boards, video displays, televisions, electronic signage and similar installations: minimum 4-inch square (2-gang), 3-inch deep interior outlet boxes. Raco #260H large capacity box with ½ through 2-inch knockouts.
      c. Security, access control, and video surveillance outlet boxes: single gang, 3-inch deep outlet boxes mounted long axis vertically.
      d. All other applications: minimum 4-inch square (2-gang) 2-1/8-inch deep boxes.
      e. Masonry Walls: Galvanized switch boxes made especially for masonry installations; depths of boxes must be coordinated for each installation.
      f. Surface: Type FS or FD box with surface cover.
      g. Corrosive locations or natatorium areas: 316 stainless steel construction suitable for the installation.
      h. Hazardous (Classified) Locations: Explosion proof boxes, seals and fittings.
      i. Special: Where above types are not suitable, boxes as required, taking into account space available, appearance, and Code requirements
   2. Interior Outlet Box Accessories: Outlet box accessories required as for installation, including covers or wall device plates, mounting brackets, wallboard hangers, extension rings, plaster rings for boxes in plaster construction, fixture studs, cable clamps and metal straps for supporting outlet boxes. Accessories shall be compatible with outlet boxes used and meet requirements of individual wiring.

B. Damp Location Outlet and Damp or Wet Location Switch Boxes: Deep type, hot dipped galvanized cast-metal weatherproof outlet wiring boxes, of type, shape, and size required. Include depth of box, threaded conduit ends, and stainless steel cover plate with spring-hinged waterproof caps suitable for application. Include faceplate gasket and corrosion-resistant, tamper / vandal proof fasteners.

C. Wet Location Outlet Boxes: Hot dipped galvanized cast-iron weatherproof outlet wiring boxes, of type, shape, and size required. Include depth of box, threaded conduit ends.

D. Junction and Pull Boxes: Galvanized sheet steel junction and pull boxes, with screw-on covers, of type, shape, and size, to suit respective location and installation.
   1. Type for Various Locations:
      a. Minimum Size: 4-inch square, 2-1/8-inches deep.
      b. 150 Cubic Inches in Volume or Larger: Code gauge steel with sides formed and welded, screw covers unless shown or required to have hinged doors. All boxes mounted above ceiling shall have screw covers. Boxes in all other areas with covers larger than 12-inches shall have hinged with screw covers. Knockouts factory stamped or formed in field with a cutting tool to provide a clean symmetrically cut hole.
      c. Exterior or Wet Areas: 304 stainless steel NEMA 4X construction with gaskets and corrosion-resistant fasteners

E. Conduit Bodies: Provide galvanized cast-metal conduit bodies, of type, shape, and size, to suit location and installation. Construct with threaded conduit ends, removable cover, and corrosion-resistant screws.

F. Bushings, Knockout Closures, and Locknuts: Provide corrosion-resistant punched-steel box knockout closures, conduit locknuts, and insulated conduit bushings of type and size to suit use and installation.

G. Outlet boxes in fire rated walls: Provide 2-hour rated gasket within box and below cover, equal to Rectorseal Metacaulk box guard and cover guard.

PART 3 - EXECUTION

3.1 INSTALLATION OF BOXES AND FITTINGS

A. Install electrical boxes and fittings as shown and as required, in compliance with NEC requirements, in accordance with the manufacturer's written instructions, in accordance with industry practices.

B. Provide recessed device boxes for wall mounted interactive media boards, video displays, televisions, electronic signage and similar installations.

C. Provide minimum 4-inch square (2-gang), 3-inch deep interior outlet boxes for technology, data, voice, video, and multi-media outlet boxes at locations other than wall mounted interactive boards, video or visual displays. Provide single gang only, 3-inch deep outlet boxes mounted long axis vertically for security, access control, and video surveillance, coordinate with security equipment installation. Provide minimum 4-inch square (2-gang) 2-1/8-inch deep boxes for all other applications. Where indicated differently on plans or where conflicts arise, notify the Architect / Engineer prior to installation. Box extenders or plaster rings shall not be used to increase size. Provide increased box size as required.

D. Junction and pull boxes, condulets, gutters, located above grid ceilings shall be mounted within 18-inches of ceiling grid. Junction and pull boxes above grid ceilings shall be mounted in the same room served. Junction boxes and pull boxes required for areas with inaccessible ceilings shall be located above the nearest accessible ceiling area. All junction box or pull box openings shall be side or bottom accessible. Removal of light fixtures, mechanical equipment or other devices shall not be required to access boxes. Outlet boxes above ceiling for low voltage terminations shall face towards the floor.

E. Use outlet and switch boxes for junctions on concealed conduit systems except in utility areas where exposed junction or pull boxes can be used.

F. Determine from the drawings and by measurement the location of each outlet. Locate electrical boxes to accommodate millwork, fixtures, marker boards, and other room equipment at no additional cost to the Owner. The outlet locations shall be modified from those shown to accommodate changes in door swing or to clear interferences that arise from construction as well as modifying them to center in rooms. The modifications shall be made with no cost as part of coordination. Check the conditions throughout the job and notify the Architect of discrepancies. Verify modifications before proceeding with installation. Set wall boxes in advance of wall construction, blocked in place and secured. Set all wall boxes flush with the finish and install extension rings as required extending boxes to the finished surfaces of special furring or wall finishes. Provide wall box support legs attached to stud to prevent movement of box in wall.

G. Unless noted or directed otherwise at installation, place outlet boxes as indicated on architectural elevations and as required by local codes.

H. Outlets above counters, mount long axis horizontally. Refer to architectural elevations and coordinate to clear backsplash and millwork.

I. Provide pull boxes, junction boxes, wiring troughs, and cabinets where necessary for installation of electrical systems. Surface mounted boxes below 9 feet and accessible to the public shall not have stamped knockouts.

J. Provide weatherproof boxes for interior and exterior locations exposed to weather or moisture.

K. Provide knockout closures to cap unused knockout holes in boxes.

L. Locate boxes and conduit bodies to ensure access to electrical wiring. Provide minimum 12-inch clearance in front of box or conduit body access.

M. Secure boxes to the substrate where they are mounted, or embed boxes in concrete or masonry.

N. Boxes for any conduit system shall not be secured to the ceiling system, HVAC ductwork or piping system.

O. Provide junction and pull boxes for feeders and branch circuits where shown and where required by NEC, regardless of whether or not boxes are shown.

P. Coordinate locations of boxes in fire rated partitions and slabs to not affect the fire rating of the partition or slab. Notify the Architect in writing where modification or construction is required to maintain the partition or slab fire rating.

Q. Exterior boxes installed within 50-feet of cooling towers or water treatment areas shall be of 304 stainless steel, weatherproof NEMA 4X construction.

R. Identification: Paint the exterior and cover plates of building interior junction boxes and pull boxes located above accessible ceilings or non-finished areas to correspond to the following colors:

1. Orange: - 480/277 VAC systems
2. Light Blue: - 240 VAC three phase delta systems.
3. Red – All Emergency circuits, regardless of voltage, and fire alarm system.
4. Light Green - 120/208 VAC 3 phase and 120/240 VAC single-phase systems
5. Yellow – Building Management and Control System - BMCS
6. White - Security and Surveillance equipment circuits

S. All box covers shall be labeled with Panel ID and circuit numbers of all circuits available in box using permanent black marker. Boxes containing main feeders are to list where fed from and load (example “MSB to Panel HA”). Information listed is to be legible, markovers are not acceptable. Multi-sectional panel numbers are not to be listed on covers (example “LA2” referring to Panel LA sec. 2 is to be listed as “LA”). Label covers for special applications explaining contents (example “Emerg. Gen. Annunciator controls”, “IDF ground”). Do not attach box covers that have both sides painted or labeled differently. In public areas where boxes are painted same color as room per architect, label inside covers. Boxes that are not used shall be labeled as not used and include panel ID. Example “Not Used Panel LA”. Unused raceways not in sight of panel shall be terminated in a box and labeled not used and include panel identification.

T. Align adjacent wall mounted outlet boxes for switches, thermostats, and similar devices.

U. Use flush mounting outlet box in finished areas unless specifically indicated as being used with exposed conduit.

V. Locate flush-mounting box in masonry wall to require cutting of masonry unit corner only. Coordinate masonry cutting to achieve neat opening.

W. Do not install flush mounting box back-to-back in walls; provide minimum 6 inches with stud separation. Provide minimum 24 inches with separation in acoustic rated walls.

X. Secure flush mounting box to interior wall and partition studs. Accurately position to allow for surface finish thickness. Provide UL listed materials to support boxes in walls to prevent movement. Ensure box cannot be pushed inside wall.

Y. Use stamped steel bridges to fasten flush mounting outlet box between studs.

Z. Install flush mounting box without damaging vapor barriers, wall insulation or reducing its effectiveness.

AA. Use adjustable steel channel fasteners for hung ceiling outlet box.

BB. Do not fasten boxes to ceiling support wires.

CC. Support systems are to hang vertically straight down. All-thread supports, when used, are not to be installed at an angle or bent.

DD. Use gang box where more than one device is mounted together. Do not use sectional box.

EE. Use gang box with plaster ring for single device outlets.

FF. Support outlets flush with suspended ceilings to the building structure.

GG. Mount boxes to the building structure with supporting facilities independent of the conduits or raceways.

HH. Where multiple feeders are in one pull box, conductors shall be wrapped with 3M No. 7700 Arc and fireproof tape.

II. Provide plaster rings of suitable depth on all outlet boxes. Face of plaster ring shall be within 1/8 inch from finished surface.

JJ. Equip boxes supporting fixtures designed to accept fixture studs with 3/8-inch stud (galvanized malleable iron) inserted through back of box and secured by locknut. Boxes not equipped with outlets shall have level metal covers with rust-resisting screws.

KK. Do not mount junction boxes above inaccessible ceilings or in inaccessible spaces. Do not mount junction boxes above ceilings accessible only by removing light fixture, mechanical equipment or other devices. At inaccessible spaces use junction box furnished with light fixture or light fixture wiring compartment UL listed for through wiring.

LL. No more than 12 conduits containing branch circuits may be installed in any junction or pull box.

MM. All junction boxes shall be protected from building finish painters' over spray and from fire proofing overspray. Remove protective coverings when painting and fire proofing are complete.

NN. Bond equipment grounding conductor to all junction and pull boxes.

OO. Do not mount boxes or conduit bodies on walls directly above electrical panels or switchgear located next to walls.

PP. Do not mount boxes or conduit bodies within 18 inches of outside edges of roof access openings.

QQ. Box extenders or plaster rings shall not be used to increase the Code mandated cable capacity of a box. Provide proper size box.

3.2 ADJUSTING

A. Adjust flush-mounting outlets to make front flush with finished wall material.

B. Install knockout closures in unused box openings.

END OF SECTION

SECTION 26 05 40

ELECTRICAL GUTTERS AND WIREWAYS

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Provide electrical gutter work as shown, as specified and as required.

B. Application: The types of electrical gutters required for the project include the following:
1. Electrical wiring gutters
2. Voice / Data / Video / Communication and signal distribution wireway

1.2 QUALITY ASSURANCE

A. UL Label: Gutters and wireways shall be UL labeled.

PART 2 - PRODUCTS

2.1 ELECTRICAL GUTTERS AND WIREWAYS

A. General: Provide hinged electrical gutters and wireways in the types and sizes indicated or required, minimum 16 gauge thickness, with rounded edges and smooth surfaces; constructed in compliance with applicable standards; with features required.

B. Size: Provide size indicated. Where size is not indicated, construct in accordance with the NEC and other standards. Gutters shall be of manufacturer’s standard lengths, without field cutting or field extensions.

C. Accessories: Provide gutter and wireway accessories where indicated, constructed of same metal and finish as gutters or wireways.

D. Supports: Provide gutter and wireway supports indicated, conforming to NEC, and as recommended by the manufacturer, and as specified in Section 26 05 33 Conduit Systems.

E. Materials and Finishes: NEMA 1 gutters and wireways shall have gray powder coat finish over galvanized steel. Gutters and wireways installed outside shall be NEMA 3RX minimum. Gutters or wireways installed within 100-feet of cooling towers, at kitchen or food preparation areas, and natatorium, spa or therapy pool areas shall be of 304 stainless steel NEMA 4X construction.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Provide gutters and wireways only where specified or required. Use of gutters and wireways shall be kept to a minimum.

B. Finishing: Remove burrs and sharp edges of gutters and wireways wherever they could be injurious to conductor insulation or jacket.

C. Installation: Install gutters and wireways where shown or required, in accordance with the manufacturer's written instructions, NEC, NECA "Standard of Installation," and with recognized industry practices to ensure that the gutters and wireways comply with the specified requirements. Comply with requirements of NEMA and the NEC pertaining to installation of electrical gutters.

D. Grounding: Electrically ground gutters and wireways to ensure continuous electrical conductivity. Provide equipment grounding conductor.

E. Conductors:
   1. Complete gutter and wireway installation before starting the installation of conductors.
   2. Provide sufficient space to permit access for installing, splicing, and maintaining the conductors.

F. A maximum of 12 conduits containing branch circuits shall be allowed to be installed in any gutter or wireway.

END OF SECTION

SECTION 26 05 50

FIRESTOPS

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Provide firestop as required, and as specified. Refer to Architectural drawings for all fire and smoke rated partitions, walls, floors, etc.

B. Types: Firestop required for the project includes smokestop.

1.2 QUALITY ASSURANCE

A. UL Label: Firestops shall be UL labeled.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Nelson

B. 3M (Minnesota Mining Manufacturing)

C. Hilti

D. Specified Technologies, Inc.

E. Metacaulk

2.2 MATERIAL AND COMPONENTS

A. General: Except as otherwise indicated, provide firestop manufacturer's standard materials and components as indicated by published product information, designed and constructed as recommended by the manufacturer, and as required for installation.

2.3 FIRESTOP

A. Conduits: Provide a soft, permanently flexible sealant for 1-1/2 to 2 hour rated fireproofing for steel conduits (up to 4" diameter).

B. Low Voltage Cables, Fiber Optic Cable and Innerduct: Provide Specified Technologies, Inc. EZ-Path single, double, or triple pathways as required.

PART 3 - EXECUTION

3.1 INSTALLATION OF FIRESTOPS

A. General: Install firestops in accordance with the manufacturer's installation instructions and industry practices to ensure that the firestops comply with requirements. Comply with UL and NFPA standards for the installation of firestops.

END OF SECTION

SECTION 26 09 22

MODIFICATION OF EXISTING MOTOR CONTROL CENTERS

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Motor control center work is as required, scheduled, and as specified.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Match existing manufacturer or OEM approved third party replacement parts and materials.

2.2 MATERIALS AND COMPONENTS

A. General: Except as otherwise indicated, provide motor control center manufacturer's standard materials and components as indicated by published product information, designed and constructed as recommended by the manufacturer, and as required for a complete installation.

2.3 600 VOLT MOTOR CONTROL CENTERS

A. Provide a factory-assembled, dead-front construction, metal-enclosed, self-supporting motor controllers of the voltage, phase, ampacity, and short circuit bracing required.
   1. Motor controllers shall include starters, protective devices, and equipment as required with interconnections, instrumentation, and control wiring. Small wiring, fuse blocks, and terminal blocks within the motor control center shall be included within the motor control center. Groups of control wires leaving the motor control center shall be furnished with terminal blocks with suitable numbering strips. Wiring shall be NEMA Class I, Type B, unless shown otherwise.
   2. Provide a phase power monitor for each new motor controller unless the existing motor control center has a centrally located monitor. Monitor relay shall drop out upon loss of any phase, undervoltage on any or all phases, or phase reversal from A-B-C sequence. Relay shall be adjustable for trip range and shall reset automatically when phase voltage and sequence is corrected. All motor starters shall open when monitor relay drops out, and automatically reset.

B. Motor Control Devices: Each motor control device shall be a combination motor control unit consisting of a magnetic starter in combination with a circuit breaker. Each unit shall be rated as shown, and as required by equipment served.
   1. Provide full-voltage, non-reversing, single-speed (FVNR), full-voltage, non-reversing, two-speed, two-winding (2S-2W), and reduced-voltage, non-reversing auto-transformer-type, closed transition (RVNR) starters sized as required. Starters shall be constructed and tested in accordance with the latest NEMA standards.
   2. Provide circuit breakers as specified below.
   3. Magnetic starter contacts shall be solid silver alloy, and shall not require filing, dressing, or cleaning throughout the life of the starter.
   4. Operating coils shall be 120V, and shall be pressure molded, and designed so that accidental exposure to excessive voltage up to 480V will not damage the coil. The starter shall also be designed so that when a coil fails due to an overvoltage condition, the starter shall definitely open, and shall not freeze in the closed position.
   5. Starters shall have manual reset, solid state, trip-free overload relays in each phase conductor. 3 phase FVNR starters shall have three overload relays. Single-phase FVNR

starter shall have an overload relay in each ungrounded conductor. Two speed, full-voltage magnetic starters shall have overload relays for all 6 control legs. Overload relays shall not be field-convertible from manual to automatic reset. Provide button in front cover to reset all overload relays.

6. Starters shall have 30.5mm RUN and STOP LED pilot lights. Furnish additional pilot lights for motor starters as shown. Provide FAST and SLOW pilot lights for two-starters. Pilot lights shall be mounted in the starter enclosure cover. Pilot lights shall be operated from an interlock on the motor starter, and shall not be wired across the operating coil.
   Green – Stop
   Red - Run
   Yellow - Slow
   Blue - Fast
7. Starters shall have 30.5mm HAND-OFF-AUTOMATIC switches. Provide for FAST-SLOW, REMOTE-LOCAL speed selection from HVAC control system for two-speed starters. Two-speed starters shall have deceleration relays between fast and slow speeds. Coordinate motor starter controls with the requirements of Division 23. Motor starter controls shall be mounted in the starter enclosure cover.
8. Each motor starter shall have two normally open and two normally closed nonconvertible auxiliary contact in addition to the number of contacts required for the "holding interlock" and control wiring. In addition, it shall be possible to field install one or more additional auxiliary contacts without removing existing wiring, or removing the starter from the enclosure.
9. Make provision for the units to be removed from the vertical bus without disturbing the wiring of the individual motor starter unit and permit starter door to be closed and fastened when removed. Include means to prevent incorrect operation of the stab-in mechanism. Each individual removable unit shall be held in place with a positive-acting center toggle mechanism. Motor starter units up through NEMA Size 4 shall be provided with the stab-in mechanism.

C. Integrated Equipment Rating: Each motor controller, as a unit, shall be given an integrated equipment rating by the manufacturer to match the existing rating of the existing motor control center. The integrated equipment short-circuit rating shall certify that equipment is capable of withstanding the stresses of a fault available at the motor control center. The ratings shall have been established from tests by the manufacturer on similar equipment as the motor control center. This test data shall be available and submitted, if requested, with or before the submittal of shop drawings.

D. Molded case circuit breakers:
   1. Greater than 800 Amp: Solid state true RMS sensing with adjustable: current, I^2t settings, ground fault (where required), instantaneous trip, and short time trip; 80-percent continuous current rating.
   2. 800 Amp and smaller: Solid state true RMS sensing with fixed current setting by rating plug or dial. Breaker shall have adjustable instantaneous trip function with short time tracking.
   3. 1,200 Amp and larger frame circuit breakers regardless of trip shall have Energy Reducing Maintenance System switch with local status indicator (ERMS).

E. Fusible switches:
   1. Quick-make, quick-break units utilizing the double-break principle of circuit interrupting to minimize arcing and pitting and shall conform to the ratings shown.
   2. Individual door over the front, equipped with a voidable interlock that prevents the door from being opened when the switch is in the ON position unless the interlock is purposely defeated by activation of the voiding mechanism. All switches shall have externally operated handles.
   3. 600 Amps and below equipped for Class J fuses.

4. 601 Amps and above shall be equipped for Class R or L fuses.
5. When required by the latest edition of the NEC or the AHJ, 1,200 Amp fused switches regardless of fuse size installed shall have Energy Reducing Maintenance System switch with local status indicator (ERMS).

PART 3 - EXECUTION

3.1 INSTALLATION OF MOTOR CONTROL CENTERS

A. General: Install motor controllers where shown, or as required, in accordance with the manufacturer's written instructions and industry practices to ensure that the motor controller comply with the specified requirements.

B. Standards: Comply with requirements of NEMA and NEC standards, and NECA Standard of Installation, for installation of motor control centers.

C. Tightness: Torque bus connections and tighten mechanical fasteners.

D. Fuses: Install fuses, of the ratings shown, in each motor starter.

E. Overloads: Install overload relays with manual reset in each phase of motor controller. Overload adjustable settings shall be based on actual motor nameplate full load amps. Field verify nameplate full load amps and adjust all relay settings accordingly.
1. Set overcurrent at motor service factor x motor nameplate FLA
2. Set high voltage trip to 8.3 percent above nominal voltage
3. Set undercurrent trip to four automatic restarts
4. Set all other trips to zero auto restarts
5. Phase Failure Relay: Adjust phase failure relay to 10 percent over voltage and 10 percent under voltage.

F. Supports: Provide individual and combination motor controllers with galvanized angle or other suitable supports if mounting on wall or other rigid surface is impractical. Controllers shall not be supported by conduit alone. Where motor controllers are mounted on equipment served, the switch shall not inhibit removal of any service panels or interfere with any required access areas. Manual motor controllers shall be installed plumb and aligned in the plane of the wall where they are installed.

G. Where motor controllers are indicated to be installed as part of a Motor Control Center, refer to the Motor Control Center specification.

H. Adjustment: Adjust operating mechanisms for free mechanical movement.

I. Coordination: Motor starter supplier shall coordinate with motors furnished by Division 23. Motor starter supplier shall coordinate with the Building Management Control System, Division 23.

J. Identity each motor controller or branch circuit protective device as specified in Section 26 05 00.

3.2 TESTING

A. Provide the field services of the manufacturer to provide initial programming of all variable functions, start-up and commissioning of each motor controller.

B. Pre-Energization Check: Check motor controllers for continuous circuits and short circuits.

C. Post Hook-Up Test: After wire and cable hook-ups, energize motor controller to show it functions

as specified.

END OF SECTION

SECTION 26 24 14

TESTING, MAINTENANCE, AND MODIFICATIONS TO EXISTING SWITCHBOARDS

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Work Included: Switchboard work to existing switchboards 600 volts or less as shown, scheduled, indicated, and specified.

B. Types: Switchboard work for the project includes power distribution switchboards.

1.2 QUALITY ASSURANCE

A. Original Manufacturer’s Installation and Maintenance Instructions

B. NEMA Compliance: Comply with National Electrical Manufacturers Association (NEMA) Standard PB2, "Dead-Front Distribution Switchboards."

1.3 SUBMITTALS

A. Indicate Original Manufacturer’s Installation and Maintenance Instructions for testing, exercising, cleaning, and lubrication where available.

B. Include electrical characteristics including voltage, frame size and trip ratings, withstand ratings, and time current curves of all new equipment and components.

C. Original Manufacturer’s Inspection Report

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Replacement parts shall be manufactured by Original Equipment Manufacturer, (OEM) when available. When OEM parts are not available, third party, UL recognized, manufactured parts shall be used. Provide written confirmation on Manufacturer’s letterhead indicating OEM parts are not available.

2.2 MATERIALS AND COMPONENTS

A. Except as otherwise indicated, provide switchboard manufacturer's standard materials and components as indicated by published product information, designed and constructed as recommended, and as required for a complete installation.

2.3 DEAD-FRONT DISTRIBUTION SWITCHBOARDS-NEW SWITCHBOARD SECTIONS AND/OR ACCESSORIES

A. New Feeder and Branch Protective Devices where indicated or required, greater than 1,200 Amps shall be individually mounted:
   1. Molded case circuit breakers:
      a. Adjustable: current, I^2t settings, ground fault (where required), instantaneous trip, and short time trip. Solid state trip true RMS sensing, without fusible elements; 100-percent continuous current rating.
      b. Energy Reducing Maintenance System switch with local status indicator (ERMS).

c. Shunt trip capability and wiring to terminal block for remote shunt trip switch wiring termination weather remote trip device is indicated or not.

2. Fusible switches:

a. Each switch shall have an individual door over the front, equipped with a voidable interlock that prevents the door from being opened when the switch is in the ON position unless the interlock is purposely defeated by activation of the voiding mechanism. All switches shall have externally operated handles.

b. Fused switches 600 Amps and below, equipped for class J fuses.

c. Fused switches 601 Amps and above shall be equipped with Class R or L rejection type fuse holders. Class RK1 or L of ampere rating and type as indicated on the plans suitable for application of the system.

d. When required by the latest edition of the NEC or the AHJ, 1,200 Amp switches regardless of fuse size installed shall have Energy Reducing Maintenance System switch with local status indicator (ERMS).

B. Feeder and Branch Protective Devices 1,200 Amps and below where indicated or required shall be group mounted:

1. Molded case circuit breakers:

a. Greater than 250 Amp: Solid state true RMS sensing with adjustable: current, I^2t settings, ground fault (where required), instantaneous trip, and short time trip; 80-percent continuous current rating.

b. 250 Amp and smaller: Solid state true RMS sensing with fixed current setting by rating plug or dial. Breaker shall have adjustable instantaneous trip function with short time tracking.

c. 1,200 Amp frame circuit breakers regardless of trip shall have Energy Reducing Maintenance System switch with local status indicator (ERMS).

2. Fusible switches:

a. Quick-make, quick-break units utilizing the double-break principle of circuit interrupting to minimize arcing and pitting and shall conform to the ratings shown.

b. Individual door over the front, equipped with a voidable interlock that prevents the door from being opened when the switch is in the ON position unless the interlock is purposely defeated by activation of the voiding mechanism. All switches shall have externally operated handles.

c. 600 Amps and below equipped for Class J fuses.

d. 601 Amps and above shall be equipped for Class R or L rejection type fuse holders.

e. When required by the latest edition of the NEC or the AHJ, 1,200 Amp fused switches regardless of fuse size installed shall have Energy Reducing Maintenance System switch with local status indicator (ERMS).

PART 3 - EXECUTION

3.1 INSTALLATION, MAINTENANCE, AND MODIFICATION OF SWITCHBOARDS

A. Comply with the requirements of NEMA and NEC, and NECA Standard of Installation, for installation of switchboards. Comply with Original Manufacture’s Operation and Maintenance Instructions for testing and periodic maintenance.

B. Torque all existing and new bus connections and tighten mechanical fasteners to manufacturer’s specifications.

C. Install fuses, of ratings shown, in each new or modified fused switch.

D. Adjustment: Adjust operating mechanisms for free mechanical movement. Adjust circuit breaker time characteristic curves as directed by the OEM for coordination with downstream overcurrent devices.

E. Cleaning: Vacuum the interior of the existing switchboard enclosures of all dust and foreign matter. Clean all existing switch contacts according to manufacturer's instructions.

F. Remove any existing circuit breakers or fusible switches that are not functional or not suitable to be reused as "spares".

G. Provide filler plates where required.

3.2 TESTING

A. Provide the services of the Original Manufacturer's Field Services personnel for initial testing at no additional cost to the Owner. The Original Manufacturer's Field Services personnel shall provide at minimum, a visual inspection of the existing switchboards and shall provide a written report on the Original Manufacturer's letter head with recommendations regarding the existing condition and recommendations to further testing, maintenance, and in regard to the specified modifications of the existing switchboard. The report shall include any deficiencies of the existing switchboard in relation to each component's intended function. In addition, provide deficiencies of the existing switchboard with regard to the current National Electrical Code. Provide the written report to the Architect within 14 days of notice to proceed and prior to any demolition or construction. All other testing, maintenance, and modifications shall be provided by the Contractor as specified at no additional cost to the Owner.

B. Pre-Energization Checks: Before energizing, check switchboards for continuous of circuits and for short circuits. Test existing Bolted Pressure Switches according to Original Manufacture's Instructions.

C. Switchboard Insulation Resistance Test: Each switchboard bus shall be insulation resistance tested after installation and modification is complete except for line and load side connections. Tests shall be made using Biddle Megger or equivalent test instrument at a voltage of not less than 1000 vDC. Resistance shall be measured from phase-to-phase and from phase-to-ground. Minimum acceptable value for insulation resistance is 2 megohms.

D. Ground Fault Protection System Test: After completion of construction and before final acceptance testing, the ground fault protection system shall be field-tested and reset to the manufacturer's settings for both current and time by a representative of the manufacturer's engineering service department. After the test, set ground fault to 50 percent of the largest overcurrent device rating in the switchboard. Ground fault setting shall not exceed 1200 amperes.

E. Provide thermal infrared scan of the existing switchboard under full load prior to testing/maintenance and modifications and of the modified and new switchboard sections after construction as directed and witnessed by Owner. Make corrections as needed as soon as possible as directed by the Owner. Repeat the scan at the 11-month prior to closeout, and make corrections prior to close-out. Provide digital video documentation with test results for comparison between prior condition and post construction modifications and future tests.

F. Submittals: Furnish instruments and personnel required for tests. Submit 4 copies of certified test results to the Architect for review. Test reports shall include switchboard tested, date and time of test, relative humidity, temperature, and weather conditions.

END OF SECTION

SECTION 26 24 25

ENCLOSED SWITCHES

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Safety and disconnect switch work where required, scheduled, indicated, specified, and required. For switches indicated or rated above 1,200 Amps, provide switchboard construction as specified for switchboards.

B. UL Approved: Safety and disconnect switches shall have UL approval and the UL label.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Schneider Electric - Square D

B. ABB-General Electric Co.

C. Siemens

D. Eaton

2.2 ENCLOSED SWITCHES

A. General: Provide heavy duty type, dead-front, sheet steel enclosed, surface-mounted safety switches of the type and size indicated. Safety switches shall be rated for the voltage of the circuit where they are installed. Safety switches used as motor disconnects shall be rated for the motor horse power served.

B. The overcurrent protective device short circuit, coordination and arch flash studies performed by the overcurrent protective device manufacturer shall be used by the respective switchgear vendor(s) to select appropriate equipment, switchgear, and overcurrent protective device characteristics such as but not limited to: equipment bracing, AIC rating, circuit breaker frame size and trip settings, and fuse type/class. The appropriate equipment suitable and required by the studies for code compliance shall be included with the submittal data for review and provided at no additional cost to the Owner. The appropriate equipment recommended by the studies for enhanced selective coordination or enhanced arc flash energy reduction beyond code compliance shall be included with the submittal data for review and consideration purposes by the engineer.

C. Switch Mechanism:
1. Safety switches shall be quick-make, quick-break type with permanently attached arc suppressor. Constructed so that switch blades are visible in the OFF position with the door open. The operating handle shall be an integral part of the box, not the cover. Switch shall have provision to padlock in the OFF position. Safety switches shall have a cover interlock to prevent unauthorized opening of the switch door when the switch mechanism is in the ON position, or closing of the switch mechanism when the switch door is open.
2. Cover interlock shall have an override mechanism to permit switch inspection by authorized personnel. Current-carrying parts shall be constructed of high conductivity copper with silver-plated switch contacts. Lugs shall be suitable for copper conductors and front removable.

D. Neutral: Provide safety switches with number of switched poles indicated. Where a neutral is

present in the circuit, provide a solid neutral with the safety switch. Where a ground conductor is present in the circuit, provide a separate solid ground with the safety switch.

E. Auxiliary Contacts: Disconnect switches related to all smoke control fans shall have auxiliary contacts for fire alarm system monitoring of the position of the disconnect switch.

2.3 ENCLOSED SWITCHES WITH OVERCURRENT AND/OR GROUND FAULT PROTECTION

A. Overcurrent protective devices 1,200 Amps and below:
   1. Where switch is intended as a building service disconnect provide solid neutral and ground bus and service entrance SE rating.
   2. Molded case circuit breakers:
      a. Greater than 800 Amp: Solid state true RMS sensing with adjustable: current, I^2t settings, ground fault (where required), instantaneous trip, and short time trip; 80-percent continuous current rating.
      b. 800 Amp and smaller: Solid state true RMS sensing with fixed current setting by rating plug or dial. Breaker shall have adjustable instantaneous trip function with short time tracking.
      c. 1,200 Amp and larger frame circuit breakers regardless of trip shall have Energy Reducing Maintenance System switch with local status indicator (ERMS).
   3. Fusible switches:
      a. Quick-make, quick-break units utilizing the double-break principle of circuit interrupting to minimize arcing and pitting and shall conform to the ratings shown.
      b. Individual door over the front, equipped with a voidable interlock that prevents the door from being opened when the switch is in the ON position unless the interlock is purposely defeated by activation of the voiding mechanism. All switches shall have externally operated handles.
      c. 600 Amps and below equipped for Class J fuses.
      d. 601 Amps and above shall be equipped for Class R or L fuses.
      e. When required by the latest edition of the NEC or the AHJ, 1,200 Amp fused switches regardless of fuse size installed shall have Energy Reducing Maintenance System switch with local status indicator (ERMS).

B. Ground Fault Interrupter (GFI) protection: Where shown or required, ground fault protection shall be achieved with adjustable pickup for ground fault currents, field-adjustable from 200 amperes and instantaneous to 60 cycle time delay. The ground fault protection system shall include necessary current sensors, internal wiring, and relays to coordinate opening the monitored faulted circuits.
   1. Ground fault protection shall be set at minimum setting for both current and time during construction. The manufacturer shall include in the submittal data the minimum setting of the device and the recommended setting for normal building operation.
   2. The ground fault system shall be factory-tested before shipment as specified:
      a. The manufacturer shall provide a factory ground fault protection system test for circuit testing and verification of tripping characteristics. The manufacturer shall pass predetermined values of current through the sensors and measure the tripping time for each phase and neutral. The measured time-current relationships shall be compared to the trip-characteristic curves. If the ground fault device trips outside the range of values indicated on the curve, the ground fault device shall be replaced or recalibrated.
      b. Relays, electrically operated switches, shunt-trip switches, circuit breakers, and similar items shall have proper voltages applied to their circuits and satisfactory operation demonstrated.
      c. Upon completion of the factory ground fault protection system test, the current and time on each ground fault device shall be set to minimum values.

2.4 ENCLOSURES

A. Enclosures in indoor locations shall be NEMA 1 unless shown otherwise.

B. Enclosures in exterior locations shall be NEMA 4X stainless steel.

C. Enclosures at kitchen and food preparation locations, exterior kitchen supply and exhaust fans, hose down areas, cooling towers, in greenhouses, and in other corrosive areas shall be NEMA 4X, stainless steel.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General: Install safety and disconnect switches where required or indicated, in accordance with the manufacturer's written instructions, requirements of the NEC, NECA Standard of Installation, and industry practices. Provide fuse identification label when fused switches are required showing type and size inside door of each switch. Include devices in coordination study to indicate overcurrent devices will selectively coordinate.

B. Location: Provide safety switches within 50’ and in sight of motor served. There shall be minimum code required clearance in front of safety switch and a clear path in which to access the switch. (i.e.: not having to walk and/or stand on obstacles such as drain pans on floor to service).

C. Supports: Provide all safety and disconnect switches with galvanized angle or other supports where mounting on wall or other rigid surface is impractical. Switches shall not be supported by conduit alone. Where safety and disconnect switches are mounted on equipment served, the switch shall not inhibit removal of service panels or interfere with access areas, not void the warranty of the equipment served. Provide mounting hardware that will allow removal of safety and disconnect switches with common work tools. Do not utilize drive pin anchors through enclosure.

D. Ground Fault Interrupter (GFI) test and settings: Where adjustable ground fault interrupter settings are provided or required, after completion of construction and before final acceptance testing, the ground fault protection system shall be field-tested and reset to the manufacturer's settings for both current and time by a representative of the manufacturer's engineering service department. After the test, set ground fault to 50-percent of the overcurrent device rating.

E. Safety and Disconnect Switches: Install disconnect switches for motor-driven equipment, appliances, motors, and motor controllers within sight of the controller position unless indicated otherwise.

F. Variable Frequency Drive (VFD) Warning Plaque: Provide VFD warning plaque at safety disconnect switches which are located down-stream of VFDs. Secure plaque to disconnect switch or immediately adjacent to disconnect switch with fasteners. Plaque shall be Yellow-White-Yellow 3-layer plastic laminated engraved with: “WARNING” (1/2 Inch Letters). “TURN OFF VFD BEFORE OPENING THIS SWITCH FOR MAINTENANCE.” (1/4 inch letters).

G. Provide disconnect switch for electric duct heaters.

H. Where disconnect switch is used or indicated as the utility service building disconnect, provide main bonding jumper and neutral to ground bond connected to the building’s grounding system. Do not bond neutral to ground when there is a neutral to ground bond upstream from the same derived neutral system serving the disconnect switch.

I. Disconnect switches related to all smoke control fans shall have auxiliary contacts for fire alarm system monitoring of the position of the disconnect switch, coordinate with Division 28.

Coordinate with fire detection and alarm contractor for the fire alarm and detection system to monitor all disconnect switches open/closed position that serve the smoke control system. All fire alarm and control wiring directly related to the monitoring of the supply power disconnect switches and control of the smoke control fans shall be installed in conduit.

3.2 TESTING

A. General: Before energizing, check for continuity of circuits and short circuits.

B. Provide thermal infrared scan of the enclosed switches rated 200 Amps or larger under full load prior to testing / maintenance and modifications and of the modified and new switchboard sections after construction as directed and witnessed by Owner. Make corrections as needed as soon as possible as directed by the Owner. Repeat the scan at the 11-month prior to closeout, and make corrections prior to closeout. Provide digital video documentation with test results for comparison between prior condition and post construction modifications and future tests.

END OF SECTION

SECTION 26 27 73

LINE VOLTAGE WIRING DEVICES

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Provide wiring device work as shown, scheduled, indicated, and specified. Low voltage and/or digital control switches required for lighting controls and lighting control systems shall be as specified and required for the low voltage and / or digital control lighting system. Refer to drawings or other specification sections for low voltage / digital lighting control systems. Cover plates for lighting control systems shall be as specified in this section unless specifically required otherwise by the low voltage / digital control device bulkhead or form factor.

1.2 QUALITY ASSURANCE

A. UL Label: Wiring devices shall be UL labeled.

B. NEMA Standard WD1 and WD6.

C. Fed. Spec. WC596, W-S-896

1.3 SUBMITTALS

A. Mark up a complete copy of the specification section for the product to indicate a) acknowledgement of the specification requirement (Comply), or b) acknowledgement that the particular specification requirement does not apply to this specific project (Not Applicable) or, c) acknowledgement that the specification requirement cannot be made or that a variance is being submitted for review to the Architect/Engineer/Owner (Does Not Comply, Explanation:) Do not submit an outline form of compliance, submit a complete copy of the specification section with the product data.

B. Submit a sample of each style and color of 120-Volt duplex receptacle and each 120/277- Volt switch with related cover plate. Attach plate to wiring device and label back side of plate with job description with permanent black marker.

C. Submit manufacturer's product data sheet for each style of device and plate on the project.

D. Submit drawings of plans, elevation and sections of receptacles and outlets in casework, cabinetwork and built-in place furniture. Coordinate dimensions with millwork shop drawings and related architectural drawing series.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Toggle switches, straight blade and twist lock devices, interior cover plates:
   1. Leviton
   2. Hubbell
   3. Pass and Seymour
   4. Eaton

B. Dimming
   1. Leviton
   2. Lutron

2.2 WIRING DEVICE COLOR

A. Device color shall be gray except 20A, 125V receptacles and toggle wall switches which are directly supplied from an emergency source shall be red, and heavy duty 30 Amp and larger simplex devices which shall be black in color where the building standard color is not available. Provide equivalent hospital grade devices where red is not available in grade specified. Verify with Owner / Architect prior to submitting for approval. Color change kits as required for dimming switches. Low voltage lighting control devices specified elsewhere shall match the line voltage wiring device color specified in this section.

2.3 RECEPTACLES

A. Industrial or hospital grade tamper resistant smooth face duplex receptacles, 2 pole, 3 wire grounding, with ground connection and poles internally connected to mounting yoke, with metal mounting straps, locking plug-tail or back and side wired with screw type terminals, NEMA indicated, (X=color designation).
   1. 20A, 125V duplex NEMA #5-20R: Leviton #5362-SGX
   2. 20A, 125V isolated ground duplex NEMA #5-20R: Leviton #5362-IGX
   3. 20A, 125V ground fault circuit interruption (GFCI) NEMA #5-20R weather and tamper resistant: Leviton #G5362-WTX
   4. 20A, 125V weather resistant (WR), tamper resistant: Leviton #TWR20-GY
   5. 20A, 125V plug load control, split circuit marked for “controlled”, tamper resistant: Leviton #TDR20-S1G
   6. 15A, with 20A feed-through, NEMA #5-15R, 125V duplex, arc fault (AFCI), tamper resistant: Leviton #AFTR1-HGX

B. Heavy-Duty Simplex: Single heavy-duty type receptacles, with green hexagonal equipment ground screw, with metal mounting straps, back or side wiring, black molded phenolic compound.
   1. 15-60A, 125-250V, straight blade, NEMA configuration as indicated or as required by Owner.
   2. 15-50A, 125-480V, twist lock, NEMA configuration as indicated or as required by Owner.

C. Hospital grade receptacles, 2 pole, 3 wire grounding, with ground connection and poles internally connected to mounting yoke, with metal mount straps, locking plug-tail or back and side wired with screw type terminals, molded phenolic compound, NEMA configuration indicated.
   1. 20A, 125V grounded duplex NEMA #5-20R: Leviton #8300-X
   2. 20A, 125V isolated ground duplex NEMA #5-20R: Leviton #8300-LIG (orange)
   3. 20A, 125V ground fault circuit interruption (GFCI) with indicator light: Leviton NEMA 5-20R-8898-HGX
   4. 20A/125V Tamper Resistant Duplex NEMA 5-20R: Leviton 8300-SGX

2.4 WALL SWITCHES

A. Toggle: Industrial grade flush toggle switches, with mounting yoke insulated from mechanism, equipped with plaster ears, switch handle, back and side-wired screw terminals.
   1. Single-pole, 120/277V, 20A switch: Leviton #1221-2X
   2. Double pole 120/277V, 20A switch: Leviton #1222-2X
   3. Three-way, 120/277V, 20A switch: Leviton #1223-2X
   4. Four-way, 120/277V, 20A switch: Leviton #1224-2G
   5. Pilot light single-pole, 120/277V, 20A switch: Leviton #1221-PL
   6. Momentary, 120/277V, 20A, single-pole double throw, center off: Hubbell only, #HBL 1557G

2.6 GFCI – GROUND FAULT CIRCUIT INTERRUPTER, BLANK FACE

A. 20A, 125V, GFCI, switch rated, blank face feed through, Hubbell #GFBF20GYL, gray finish, stainless steel cover plate black laser engraved with device protected, (example: DRINKING FOUNTAIN GFCI).

2.7 INTERIOR WALL COVER PLATES AND FASTENERS

A. Type 302 non-magnetic stainless-steel with satin finish (also required for wall box device cover plates for low voltage and digital lighting controls specified elsewhere).

B. Cover plate laser plate engraving for device identification (other than low voltage lighting controls).
   1. Provide laser cover plate engraving with black filling for all wiring devices indicating panelboard name, circuit, and voltage.
   2. Wiring devices connected to emergency/stand-by generator or inverter shall include the word “EMERGENCY”.
   3. Text orientation shall be upright, readable from left to right when cover plate is installed.
   4. Remotely located lighting switches shall also indicate the room or area and zone controlled by each switch. Coordinate specific wording with Owner/Architect.
   5. Blank face GFCI cover plates shall also intuitively indicate the load or equipment served, device, or area protected downstream (“EDF” for drinking fountains, “RM RECEPTS”, “HOOD RECEPTS”, “VENDING”, “REFRIG”, etc.) For other loads, Owner/Architect shall determine name plate wording.

2.8 EXTERIOR COVER PLATES

A. Thomas & Betts CK Series, cast aluminum standard depth, locking mount, while-in-use, wet location, universal configuration.
   1. Vertical mount receptacle: #CKSUV
   2. Horizontal mount receptacle: #CKMU
   3. Two-gang: #2CKU
   4. 30-60 Amp Devices: #CKLSUV
   3. 30-60 Amp, voltage, NEMA plug/receptacle as required by Owner, SOOW cable, number of conductors and length as required, mesh strain relief cord grips.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Cover plates for receptacles and toggle switches shall be of the same manufacturer throughout unless otherwise noted.
   1. Key switches and keys shall be as specified and also as approved by Owner.
   2. Submit samples for each specified toggle switch and duplex receptacle color to Architect.

B. Install wiring devices where shown and as required, in accordance with manufacturer's written instructions, requirements of NEC, and in accordance with industry practices. Do not install devices until wall construction and wiring is completed.

C. Install receptacles and switches only in electrical boxes that are clean, free from building materials, debris, and similar matter.

D. Install wiring devices plumb and aligned in the plane of the wall, floor, ceiling or equipment rack.

E. Install switches in boxes on the strike side of doors as hung. Install so the up position will close the circuit or will be the highest level of illumination. Where more than one switch is in the same location, install switches in a multi-gang box with a single cover plate.

F. Provide a cover plate for every wiring device and blank cover plates for unused rough-in-only boxes that matches the building standard. Fasten all plates outdoors with type 302 Allen Head "tamper-proof" screws.

G. Mounting heights of all wiring devices shall comply with local accessibility standards and local codes, except where wiring devices are indicated for special purpose and access is only required by maintenance or service personnel.

H. Refer to Architectural drawing and elevations, etc. for exact location of wiring devices. Coordinate location of all wiring devices with other trades, specialty items, and millwork and resolve all conflicts prior to rough-in. Field coordinate exact mounting location with all trades to avoid and resolve conflicts during construction.

I. Locate receptacles for electric drinking fountains/coolers and bottle fill stations below equipment so that the receptacle is accessible and concealed as much as practical from public view by the equipment open cowling so that the receptacle remain readily accessible. For dual level basin equipment, locate receptacle under the upper basin.

J. Provide convenience outlet receptacle within 25-feet of all new electrically operated mechanical equipment.

K. Where exterior receptacles are intended for continuous use, mount in horizontal position with while in use cover plate. (Exterior electric drinking fountains, ice makers, ice storage bins, landscape lighting low voltage transformers, seasonal decorative lighting, etc.)

L. Install wall box dimmers to achieve full rating specified after de-rating for ganging as recommended by manufacturer.

M. Do not share neutral conductor on load side of dimming switches.

N. Install receptacles with grounding pole down, except in any of the following conditions where the grounding pole shall be installed in the up position: healthcare occupancies, if required by local AHJ, if required by Owner’s construction standards or if directed by Owner or Architect. If installed horizontally, install with neutral pole on top.

O. Connect wiring device grounding terminal to branch circuit equipment grounding conductor.

P. Provide pigtail to each receptacle and each switch. Neutral and phase conductors shall be installed using side or rear entry lugs only. Do not wrap conductors around screw terminals. Tighten all screws and lugs as recommended by manufacturer.

Q. All receptacles and switches shall have a minimum of two wraps of Scotch 33 or equivalent tape around terminal screws.

R. Provide toggle switch within sight of all trap primers, circulation pumps, 120-Volt motors and motorized equipment to serve as the equipment disconnect switch.

3.2 GROUND FAULT PROTECTION FOR PERSONELL

A. When GFCI personnel protection receptacles are not commercially available or cannot be installed at a readily accessible location or indicated otherwise on the drawings, GFCI personnel protection shall be provided by a remote blank face GFCI wiring device or by an up-stream GFCI receptacle that also provides downstream GFCI protection and located in a readily accessible location. When branch circuit breaker device with integral GFCI protection is required or specified, it shall be

within the manufacture's recommended distance limitations of the connected receptacle(s) or load(s) for proper GFCI personnel protection at the farthest outlet.

B. GFCI personal protection locations include but are not limited to the following:
   1. For other than dwelling units: All single phase 125-250-Volt (150-Volts to ground or less) receptacles 50-Amperes or less, and all three phase 125-250-Volt (150-Volts to ground or less) receptacles 100-Ampres or less in the locations indicated below.
   2. Dwelling units: All single phase 125-250-Volt receptacles installed in the following locations indicated below.
   3. Provide personnel GFCI protection as indicated above in the following locations and all additional locations as required by the NEC.
      a. Outdoors (with exceptions for not readily accessible receptacles with dedicated branch circuits for snow melting, deicing, pipeline/vessel heat receptacles. Provide these loads with 30mA EGFI circuit breaker protection).
      b. Bathrooms/toilets/restrooms
      c. Janitors/custodial closets and mop sinks.
      d. Laundry areas
      e. Parking structures, service garages, garages and accessory buildings
      f. Basements, crawl spaces (including 120-Volt lighting)
      g. Within 6-feet of all water sources including sinks, mop-sinks, lavatories, bathtubs, shower stalls, faucets, eye wash stations, emergency shower stations
      h. Indoor damp and wet locations
      i. Locker rooms
      j. Indoor swimming pools and natatoriums areas and adjacent corridor/hall convenience receptacle outlets located within 25-feet of all access doors.
      k. Non-dwelling unit therapeutic tubs/pools/whirlpool areas and adjacent corridor/hall convenience receptacle outlets located within 25-feet of all access doors.
      l. Receptacles serving dwelling unit kitchen counter tops
      m. Vending machines
      n. Elevators, dumb waiters, escalators, moving sidewalks: receptacles in pits, hoist ways, well ways or those mounted on the cars of elevators and dumb waiters.
      o. Electric vehicle charging equipment.
      p. All receptacles serving kitchen or food preparation counter tops.
      q. Automotive vacuum machines
      r. Drinking water fountains/coolers and bottle fill stations
      s. Corded high-pressure spray washing machines
      t. Tire inflation machines
      u. Dish washers
      v. Receptacles at end of cord reels or drop cords.
      w. Boat houses, boat hoist, and all pier/dock receptacles and lighting (excludes shore power that requires GFPE).
      x. Central plant, mechanical rooms and electrical rooms
      y. Wood, metal, or other material fabrication or vocational training shops.
      z. Receptacles that serve educational science and science prep room counter tops.

C. Where a GFCI protected receptacle outlet is required or indicated behind vending machine, refrigerators or other equipment, provide remote GFCI blank face in same room as protected receptacle and at a readily accessible location with standard receptacle outlet behind equipment. Refrigerators shall be GFCI protected only where located within 6-feet of power cord distance from the edge of a sink to the surface of the refrigerator.

D. Unless indicated otherwise, locate blank face GFCI device near light switches at same height as light switches or ganged with the light switch. Provide GFCI protection for all receptacle outlets located below 42-inches in all infant through 2-year old day care and similar areas designated for

occupancy by infant through 2-year old day care occupants so the GFCI device can easily be intentionally tripped or tested and reset.

E. Provide branch circuit breaker 30mA (EDP) or 100mA (EPE) equipment protection for utilization equipment as required by the NEC and where indicated on the drawings.

3.4 TESTING

A. Before energizing, check for continuity of circuits, short circuits, and grounding connections.

B. After energizing, check wiring devices to demonstrate proper operation and receptacles for correct polarization, voltage and phase orientation if intended 3-phase equipment is phase orientation dependent for proper motor rotation or operation.

C. Test each individual GFCI receptacle and all downstream receptacles protected by an upstream GFCI device with simulated ground fault tester, make corrections as necessary.

D. Operate each wall switch with circuit energized and verify proper operation.

END OF SECTION

SALASO'BRIEN
| expect a difference |
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART TWO
CSP #22.26

AMELIA ELEMENTARY SCHOOL
555 MAJOR DR, BEAUMONT, TX 77707

BEAUMONT UNITED FIELDHOUSE
3443 FANNETT RD, BEAUMONT, TX 77705

BINGMAN HEAD START
5265 KENNETH AVE, BEAUMONT, TX 77705

FLETCHER ELEMENTARY SCHOOL
1055 AVENUE F, BEAUMONT, TX 77701

JONES CLARK ELEMENTARY SCHOOL
3525 CLEVELAND ST, BEAUMONT, TX 77703

MARSHALL MIDDLE SCHOOL
6455 GLADYS AVE, BEAUMONT, TX 77706

PAUL BROWN LEARNING CENTER
3395 HARRISON AVE, BEAUMONT, TX 77706

SMITH MIDDLE SCHOOL
4415 CONCORD DR, BEAUMONT, TX 77703

SOUTH PARK MIDDLE SCHOOL
4500 HIGHLAND AVE, BEAUMONT, TX 77705

WESTBROOK HIGH SCHOOL
8750 PHELAN BLVD, BEAUMONT, TX 77706

SITE LOCATIONS

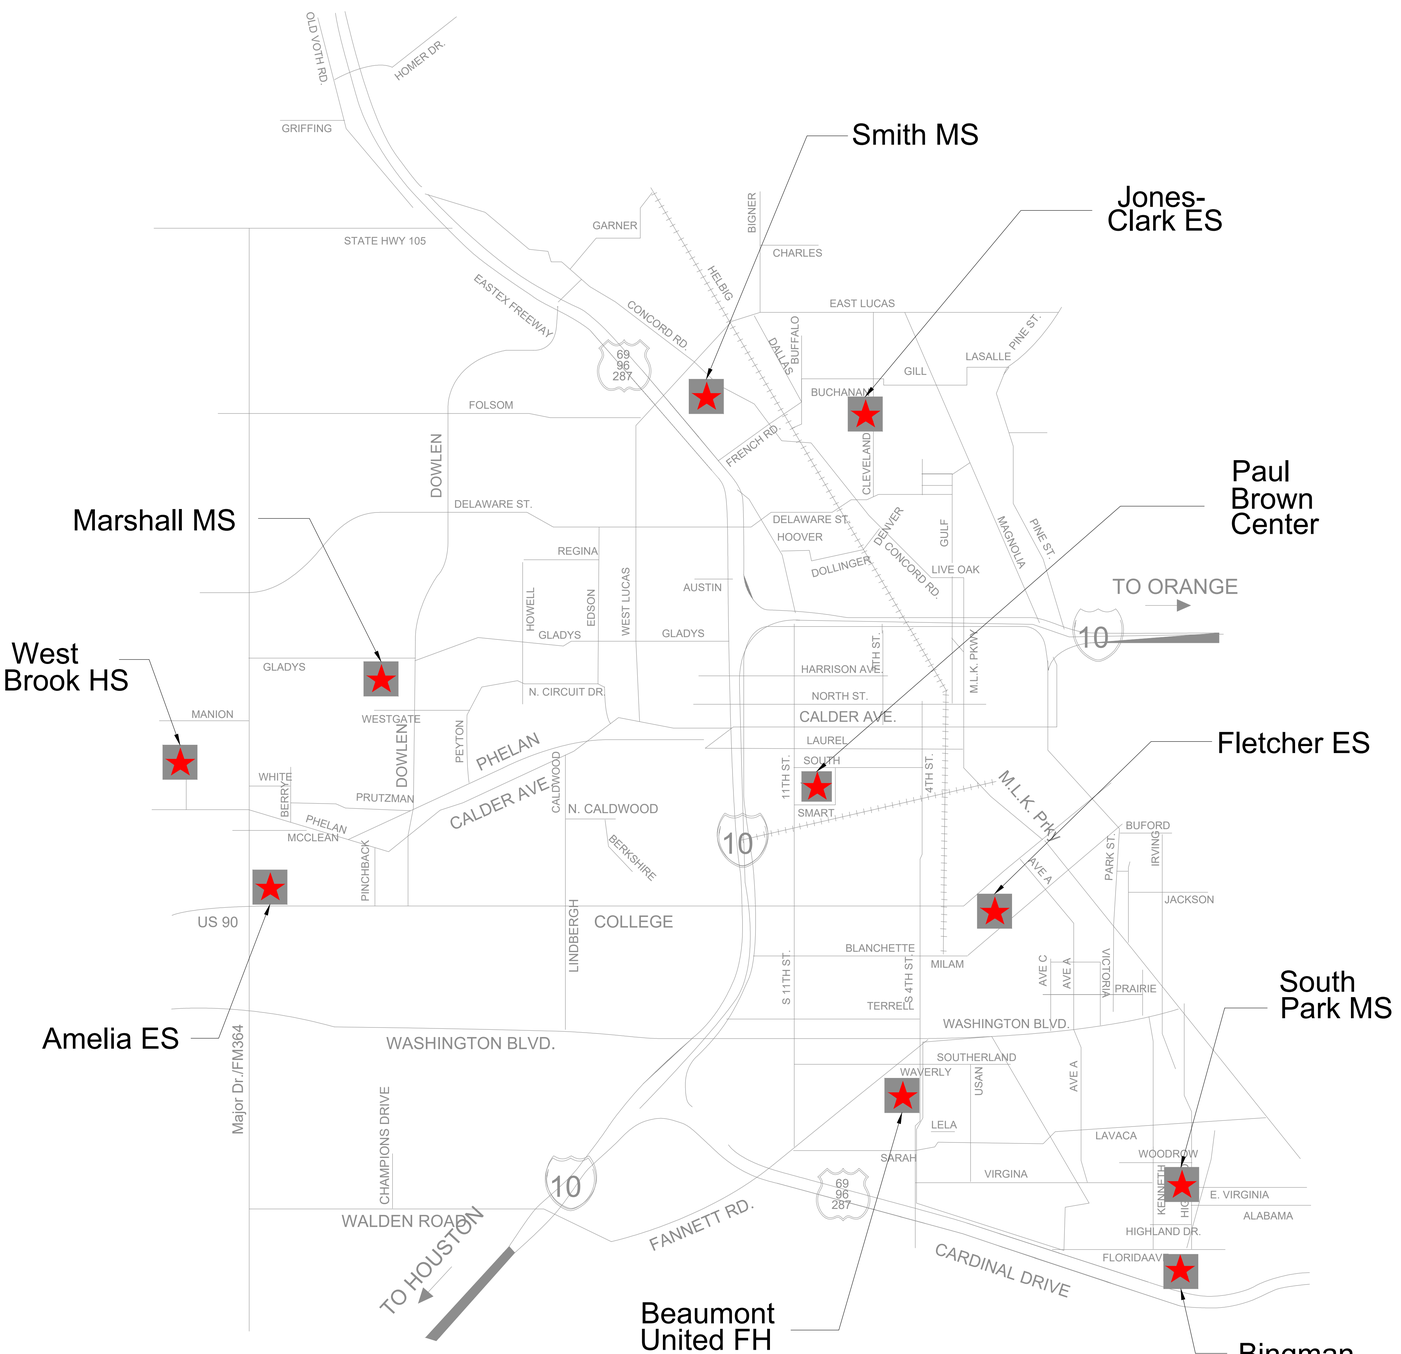

LIST OF DRAWINGS:

CS-1 COVER SHEET - LIST OF DRAWINGS
CS-2 COVER SHEET - SITES

AMELIA ELEMENTARY SCHOOL
M0.1 MECHANICAL DEMOLITION FLOOR PLAN - AMELIA ES
M1.1 MECHANICAL FLOOR PLAN - AMELIA ES
M2.1 MECHANICAL DETAILS AND SCHEDULES - AMELIA ES
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - AMELIA ES
E1.1 ELECTRICAL FLOOR PLAN - AMELIA ES

BEAUMONT UNITED FIELD HOUSE
M0.1 MECHANICAL DEMOLITION FLOOR PLAN - BEAUMONT UNITED FH
M1.1 MECHANICAL FLOOR PLAN - BEAUMONT UNITED FH
M2.1 MECHANICAL DETAILS AND SCHEDULES - BEAUMONT UNITED FH
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - BEAUMONT UNITED FH
E1.1 ELECTRICAL FLOOR PLAN - BEAUMONT UNITED FH

BINGHAM HEAD START
M0.1 MECHANICAL DEMOLITION FLOOR PLAN - BINGMAN HEAD START
M1.1 MECHANICAL FLOOR PLAN - BINGMAN HEAD START
M2.1 MECHANICAL DETAILS AND SCHEDULES - BINGMAN HEAD START
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - BINGMAN HEAD START
E1.1 ELECTRICAL FLOOR PLAN - BINGMAN HEAD START

FLETCHER ELEMENTARY SCHOOL
M0.1 MECHANICAL DEMOLITION FLOOR PLAN - FLETCHER ES
M1.1 MECHANICAL FLOOR PLAN - FLETCHER ES
M2.1 MECHANICAL DETAILS AND SCHEDULES - FLETCHER ES
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - FLETCHER ES
E1.1 ELECTRICAL FLOOR PLAN - FLETCHER ES

JONES CLARK ELEMENTARY SCHOOL
M0.1 MECHANICAL DEMOLITION FLOOR PLAN - JONES CLARK ES
M1.1 MECHANICAL FLOOR PLAN - JONES CLARK ES
M2.1 MECHANICAL DETAILS AND SCHEDULES - JONES CLARK ES
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - JONES CLARK ES
E1.1 ELECTRICAL FLOOR PLAN - JONES CLARK ES

MARSHALL MIDDLE SCHOOL
M0.1 MECHANICAL DEMOLITION FLOOR PLAN - MARSHALL MS
M1.1 MECHANICAL FLOOR PLAN - MARSHALL MS
M2.1 MECHANICAL DETAILS AND SCHEDULES - MARSHALL MS
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - MARSHALL MS
E1.1 ELECTRICAL FLOOR PLAN - MARSHALL MS

PAUL BROWN LEARNING CENTER
M0.1 MECHANICAL DEMOLITION FLOOR PLAN - PAUL BROWN LC
M1.1 MECHANICAL FLOOR PLAN - PAUL BROWN LC
M2.1 MECHANICAL DETAILS AND SCHEDULES - PAUL BROWN LC
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - PAUL BROWN LC
E1.1 ELECTRICAL FLOOR PLAN - PAUL BROWN LC

SMITH MIDDLE SCHOOL
M0.1 MECHANICAL DEMOLITION FLOOR PLAN - SMITH MS
M1.1 MECHANICAL FLOOR PLAN - SMITH MS
M2.1 MECHANICAL DETAILS AND SCHEDULES - SMITH MS
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - SMITH MS
E1.1 ELECTRICAL FLOOR PLAN - SMITH MS

SOUTH PARK MIDDLE SCHOOL
M0.1 MECHANICAL DEMOLITION FLOOR PLAN - SOUTH PARK MS
M1.1 MECHANICAL FLOOR PLAN - SOUTH PARK MS
M2.1 MECHANICAL DETAILS AND SCHEDULES - SOUTH PARK MS
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - SOUTH PARK MS
E1.1 ELECTRICAL FLOOR PLAN - SOUTH PARK MS

WESTBROOK HIGH SCHOOL
M0.1 MECHANICAL DEMOLITION FLOOR PLAN - WESTBROOK HS
M1.1 MECHANICAL FLOOR PLAN - WESTBROOK HS
M2.1 MECHANICAL DETAILS AND SCHEDULES - WESTBROOK HS
E0.1 ELECTRICAL DEMOLITION FLOOR PLANS - WESTBROOK HS
E1.1 ELECTRICAL FLOOR PLAN - WESTBROOK HS

BRADLEY KALMAN
80219
LICENSED
PROFESSIONAL ENGINEER
05-16-2022

COVER SHEET – LIST OF DRAWINGS
CS-1

SALASO'BRIEN
| expect a difference |
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART TWO
CSP #22.26

Beaumont ISD
Preparing Our Next Generation

SITE LOCATIONS

AMELIA ELEMENTARY SCHOOL
555 MAJOR DR, BEAUMONT, TX 77707

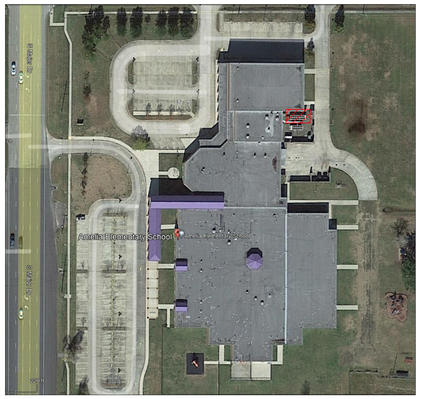

BEAUMONT UNITED FIELDHOUSE
3443 FANNETT RD, BEAUMONT, TX 77705



BINGMAN HEAD START
5265 KENNETH AVE, BEAUMONT, TX 77705

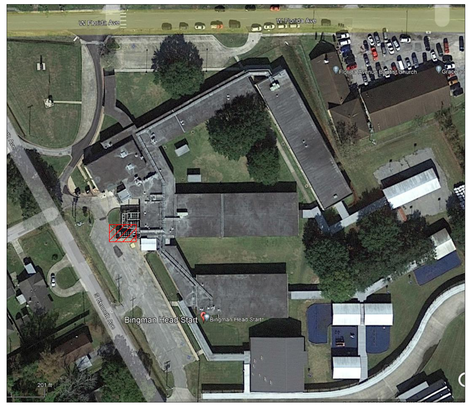

FLETCHER ELEMENTARY SCHOOL
1055 AVENUE F, BEAUMONT, TX 77701



JONES CLARK ELEMENTARY SCHOOL
3525 CLEVELAND ST, BEAUMONT, TX 77703



MARSHALL MIDDLE SCHOOL
6455 GLADYS AVE, BEAUMONT, TX 77706

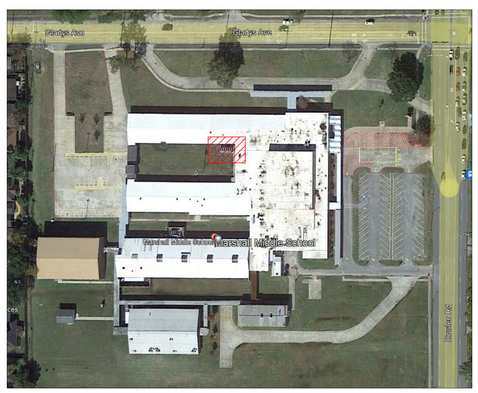

PAUL BROWN LEARNING CENTER
3395 HARRISON AVE, BEAUMONT, TX 77706

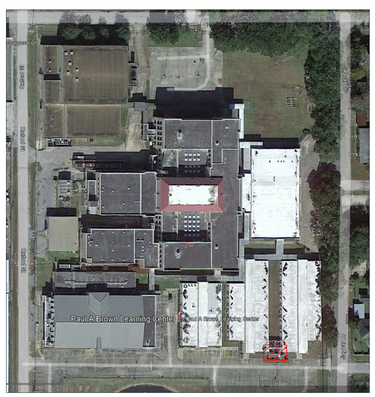

SMITH MIDDLE SCHOOL
4415 CONCORD DR, BEAUMONT, TX 77703

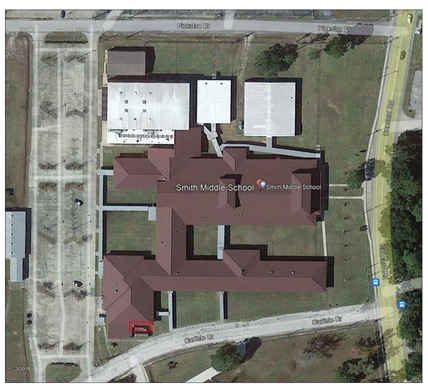

SOUTH PARK MIDDLE SCHOOL
4500 HIGHLAND AVE, BEAUMONT, TX 77705

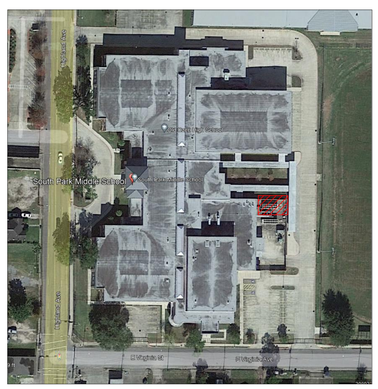

WESTBROOK HIGH SCHOOL
8750 PHELAN BLVD, BEAUMONT, TX 77706

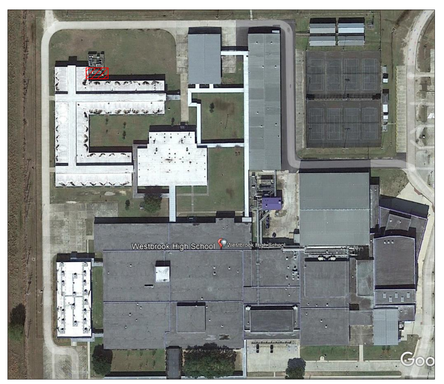

BRADLEY KALMANS
80219
05-16-2022

COVER SHEET – SITES
CS-2

DEMOLITION GENERAL NOTES:

1. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FEILD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.
2. ALL MECHANICAL SYSTEMS SHOWN ON THIS PLAN ARE FROM EXISTING DRAWINGS AND PRELIMINARY FIELD WORK. CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL LOCATIONS AND SIZES OF MECHANICAL SYSTEMS PRIOR TO THE START OF WORK.
3. OWNER SHALL HAVE FIRST RIGHT OF REFUSAL ON ALL HVAC EQUIPMENT BEING REMOVED FROM THIS PROJECT. THIS INCLUDES BUT NOT LIMITED TO INTERNAL COMPONENTS OF CHILERS, VALVES, AND PIPE STANDS.

DEMOLITION KEYED NOTES:

1. REMOVE EXISTING CHW S/R PIPING AND ASSOCIATED VALVES UP TO POINT INDICATED.
2. EXISTING CHW S/R PIPING TO REMAIN.
3. EXISTING AIR COOLED CHILLER SHALL BE REMOVED. EXISTING CONCRETE PAD SHALL REMAIN.
4. EXISTING CONDENSING UNIT, PIPING, AND ALL ASSOCIATED APPURTENANCES SHALL REMAIN.
5. EXISTING PIPING SUPPORTS SHALL REMAIN.
6. EXISTING CHILLER SHALL REMAIN IN PLACE AND OPERATIONAL.

BMCS NOTE:
EXISTING CONTROL SYSTEM IS BY AUTOMATED LOGIC. REFER TO BMCS SPECIFICATION FOR MORE INFORMATION.

DEMO SYMBOL LEGEND

RENOVATIONS	
	ITEM TO REMAIN
	ITEM TO BE REMOVED

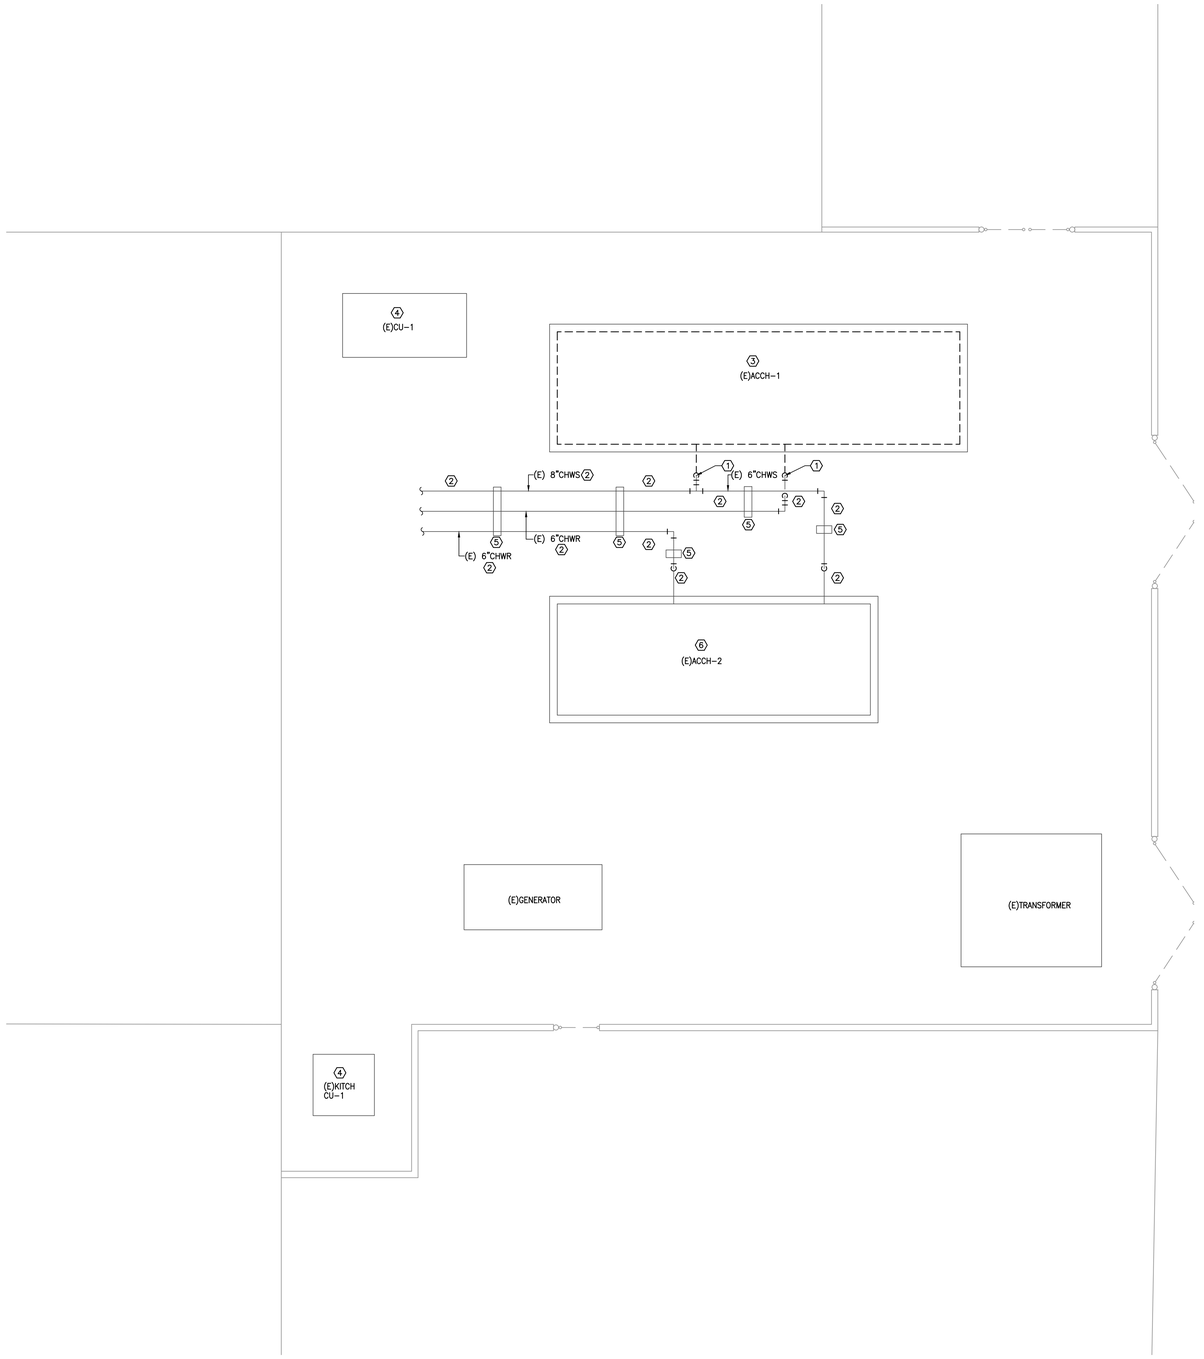

NORTH

1 **MECHANICAL DEMOLITION FLOOR PLAN - AMELIA ES**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
STATE OF TEXAS
05-16-2022

MECHANICAL DEMOLITION FLOOR PLAN - AMELIA ES

M0.1

MECHANICAL GENERAL NOTES:

1. MECHANICAL CONTRACTOR SHALL COORDINATE WITH THE ELECTRICAL CONTRACTOR FOR ALL ELECTRICAL POWER REQUIREMENTS.
2. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FIELD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.

MECHANICAL KEYED NOTES:

1. PROVIDE OUTDOOR PIPING INSULATION AS SPECIFIED.
2. PROVIDE NEW CHW S/R PIPING AS SPECIFICED AND CONNECT TO EXISTING PIPING. RE:3/M2.1 FOR PARTIAL PIPING DIAGRAM.
3. VERIFY AIR-COOLED CHILLER SERVICE CLEARANCES WITH MANUFACTURER. COORDINATE WITH OTHER TRADES NOT TO OBSTRUCT.
4. INSTALL NEW CHILLER ON EXISTING CONCRETE PAD. EXTEND EXISTING CONCRETE PAD AS REQUIRED TO ACCOMMODATE NEW CHILLER.
5. POWER CONNECTION FOR NEW CHILLER SHALL BE AT THIS END, SAME LOCATION AS DEMOLISHED CHILLER.

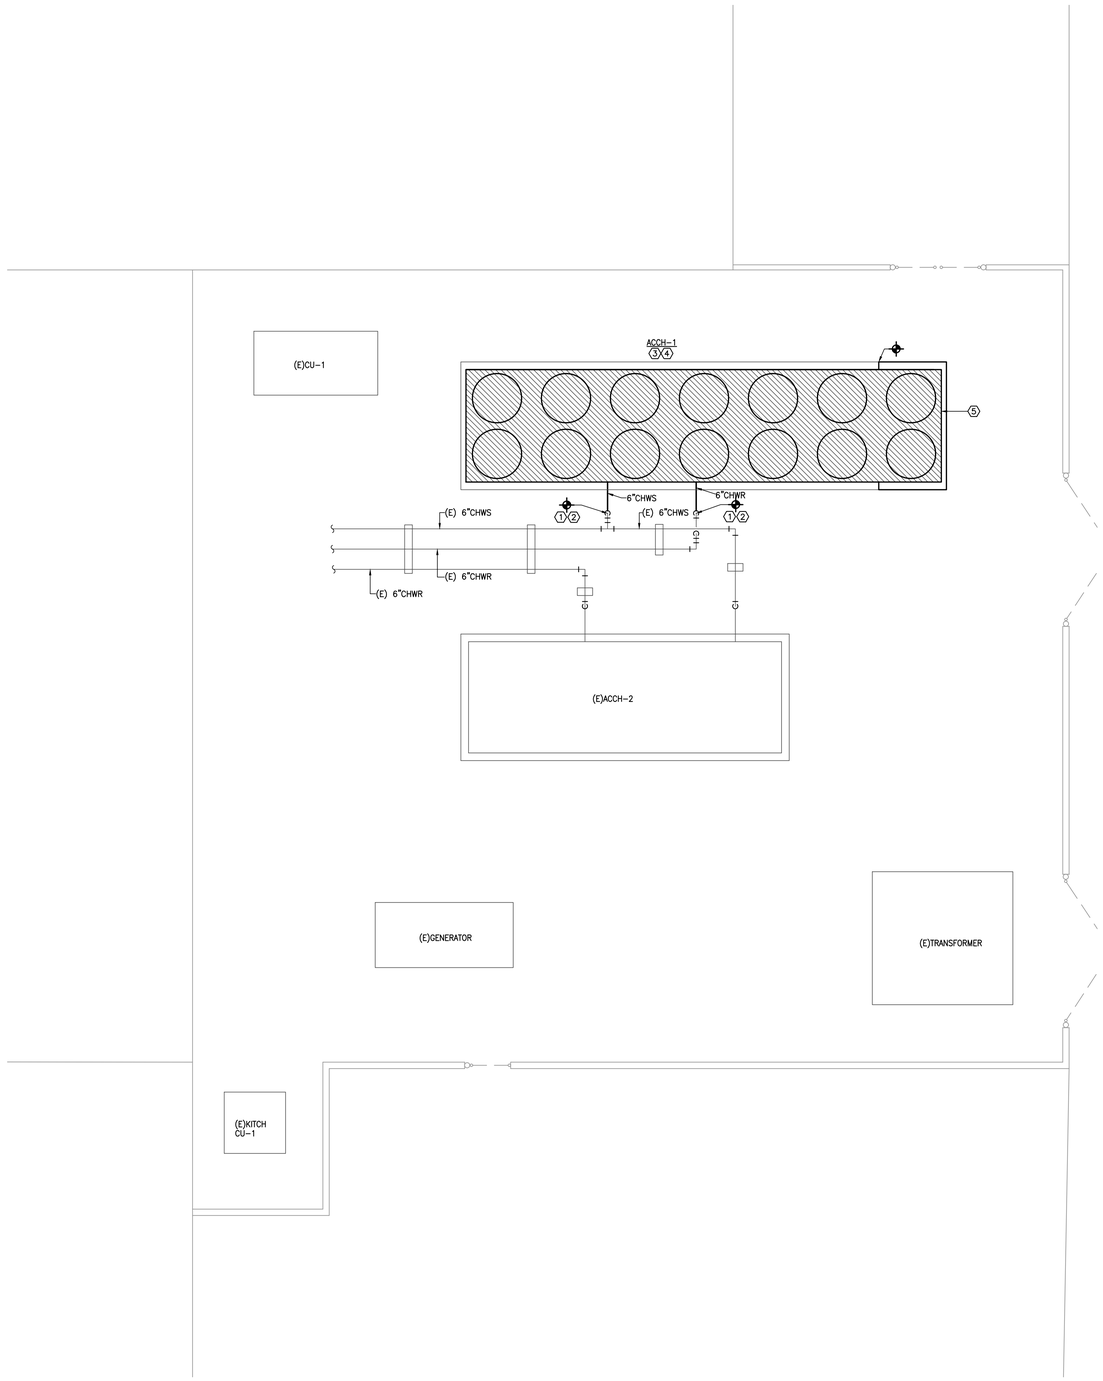

NORTH

1 **MECHANICAL FLOOR PLAN - AMELIA ES**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



MECHANICAL FLOOR PLAN - AMELIA ES

M1.1

PACKAGED AIR COOLED SCREW CHILLER

MARK	ACTUAL CAPACITY (TONS)	LEAVING WATER TEMP. (°F)	GPM	MAXIMUM WATER PRESSURE DROP (IN.W.G.)	AMBIENT AIR TEMP. (°F)	CURRENT CHARACTERISTIC	REMARKS
ACCH-1	274	44	600	20.0	105.0	480/3/60	1,2,3,4

GENERAL NOTES:

1. MAXIMUM FOULING FACTOR FOR THE EVAPORATOR IS 0.0001
2. MAINTAIN MINIMUM CLEARANCES REQUIRED BY CHILLER MANUFACTURER FOR PROPER AIRFLOW TO FANS AND UNIT. MAINTAIN MINIMUM CLEARANCE AS REQUIRED TO OPEN ACCESS AND CONTROL DOORS ON EQUIPMENT FOR SERVICE, MAINTENANCE AND INSPECTION. MAINTAIN MIMIMUM ELECTRICAL CLEARANCES AS REQUIRED BY NEC.
3. CHILLER SHALL MEET OR EXCEED THE AHRI FULL-LOAD AND PART-LOAD PATH A OR PATH B EFFICIENCIES INDICATED IN THE 2015 IECC.

REMARKS:

1. PROVIDE WITH LOW AMBIENT HEAD PRESSURE CONTROL.
2. PROVIDE WITH INTEGRAL MAIN ELECTRICAL DISCONNECT SWITCH.
3. PROVIDE WITH INSULATION ON ALL SUCTION LINES.
4. NEW CHILLER SHALL HAVE A MAX LENGTH OF 372" (31'-0").

SYMBOL LEGEND

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
GENERAL	
(#)	KEY NOTE TAG
(#)	NOTE SPECIFIC TO DETAIL TAG
(A)	REVISION TAG
	NEW EQUIPMENT
PIPING	
—D—	CONDENSATE DRAIN LINE
—AD—	AUXILLARY CONDENSATE DRAIN LINE
—RLR—	REFRIGERANT LIQUID & GAS RECIRCULATION LINE (TOTAL OF TWO PIPES, ONLY ONE PIPE SHOWN FOR DRAWING CLARITY)
—RL—	REFRIGERANT LIQUID LINE
—HG—	REFRIGERANT HOT GAS LINE
—RS—	REFRIGERANT SUCTION LINE
	ELBOW UP
	ELBOW DOWN
	90° ELBOW
	45° ELBOW
	TEE
	TEE DOWN
	TEE UP
	TOP BRANCH CONNECTION
	BOTTOM BRANCH CONNECTION
	FLANGE
	CAP
	CONTINUATION
	FLOOR DRAIN (REFER TO PLUMBING DRAWINGS)
	PIPE GUIDE
SUBSCRIPTS AND ABREVIATIONS	
AFF	ABOVE FINISHED FLOOR
BBS	BELOW BOTTOM OF STRUCTURE
BOD	BOTTOM OF DUCT
BOP	BOTTOM OF PIPE
CA	COMBUSTION AIR
CFM	CUBIC FEET PER MINUTE
EA	EXHAUST AIR
FPM	FEET PER MINUTE
NC	NORMALLY CLOSED
NO	NORMALLY OPEN
OA	OUTSIDE AIR
RA	RETURN AIR
SA	SUPPLY AIR
RENOVATIONS	
	POINT OF CONNECTION FROM NEW TO EXISTING
	ITEM TO REMAIN
	ITEM TO BE REMOVED

MS03



MECHANICAL KEYED NOTES

1. BALANCING VALVE TO BE PROVIDED WITH INFINITE POSITION CRANK OR MEMORY STOP FOR BALANCING SERVICE.
2. INSTALL NEW CHILLER ON EXISTING CONCRETE HOUSEKEEPING PAD. EXTEND EXISTING HOUSEKEEPING PAD AS REQUIRED TO ACCOMMODATE NEW CHILLER.
3. PROVIDE ALL OUTDOOR PIPING WITH INSULATION AND ALUMINUM JACKETING AS SPECIFIED.
4. PROVIDE INLINE STRAINER IN VERTICAL PIPE WITH 1" DRAIN LINE.
5. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.

3 CHILLED WATER PIPING DIAGRAM

SCALE: NO SCALE



NOTES: 1. SEE TEMPERATURE TEST WELL DETAIL FOR MOUNTING ARRANGEMENTS AND CLEARANCES
2. MOUNT TO BE READABLE FROM FLOOR AT 5'-6" EYE LEVEL (7'-0" MAX.)

2 THERMOMETER INSTALLATION

SCALE: NONE CP009



MECHANICAL KEYED NOTES

1. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.

1 TYPICAL PIPING AT INLET AND OUTLET OF CHILLER

SCALE: NONE

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



MECHANICAL DETAILS AND SCHEDULES - AMELIA ES

M2.1

ELECTRICAL KEYED NOTES

1. DISCONNECT & REMOVE EXISTING EQUIPMENT WITH ASSOCIATED DISCONNECT & CONDUCTORS ALL THE WAY BACK TO SOURCE. SAW CUT ABANDONED EXPOSED CONDUITS TO FLUSH MOUNT THE GROUND LEVEL. ABANDON UNDERGROUND CONDUITS IN PLACE & PROVIDE COVER.
2. DISCONNECT ALL EQUIPMENT CONNECTIONS. KEEP EXISTING CONDUITS IN PLACE FOR CONNECTION OF NEW EQUIPMENT. FIELD VERIFY CIRCUIT(S) ORIGINATION(S).
3. KEEP EXISTING CONTROLS CONDUIT(S) IN PLACE & EXTEND TO NEW CHILLER AS REQUIRED.

DEMO SYMBOL LEGEND

RENOVATIONS	
———	EXISTING TO REMAIN EQUIPMENT
- - - - - -	DISCONNECT & REMOVED EQUIPMENT

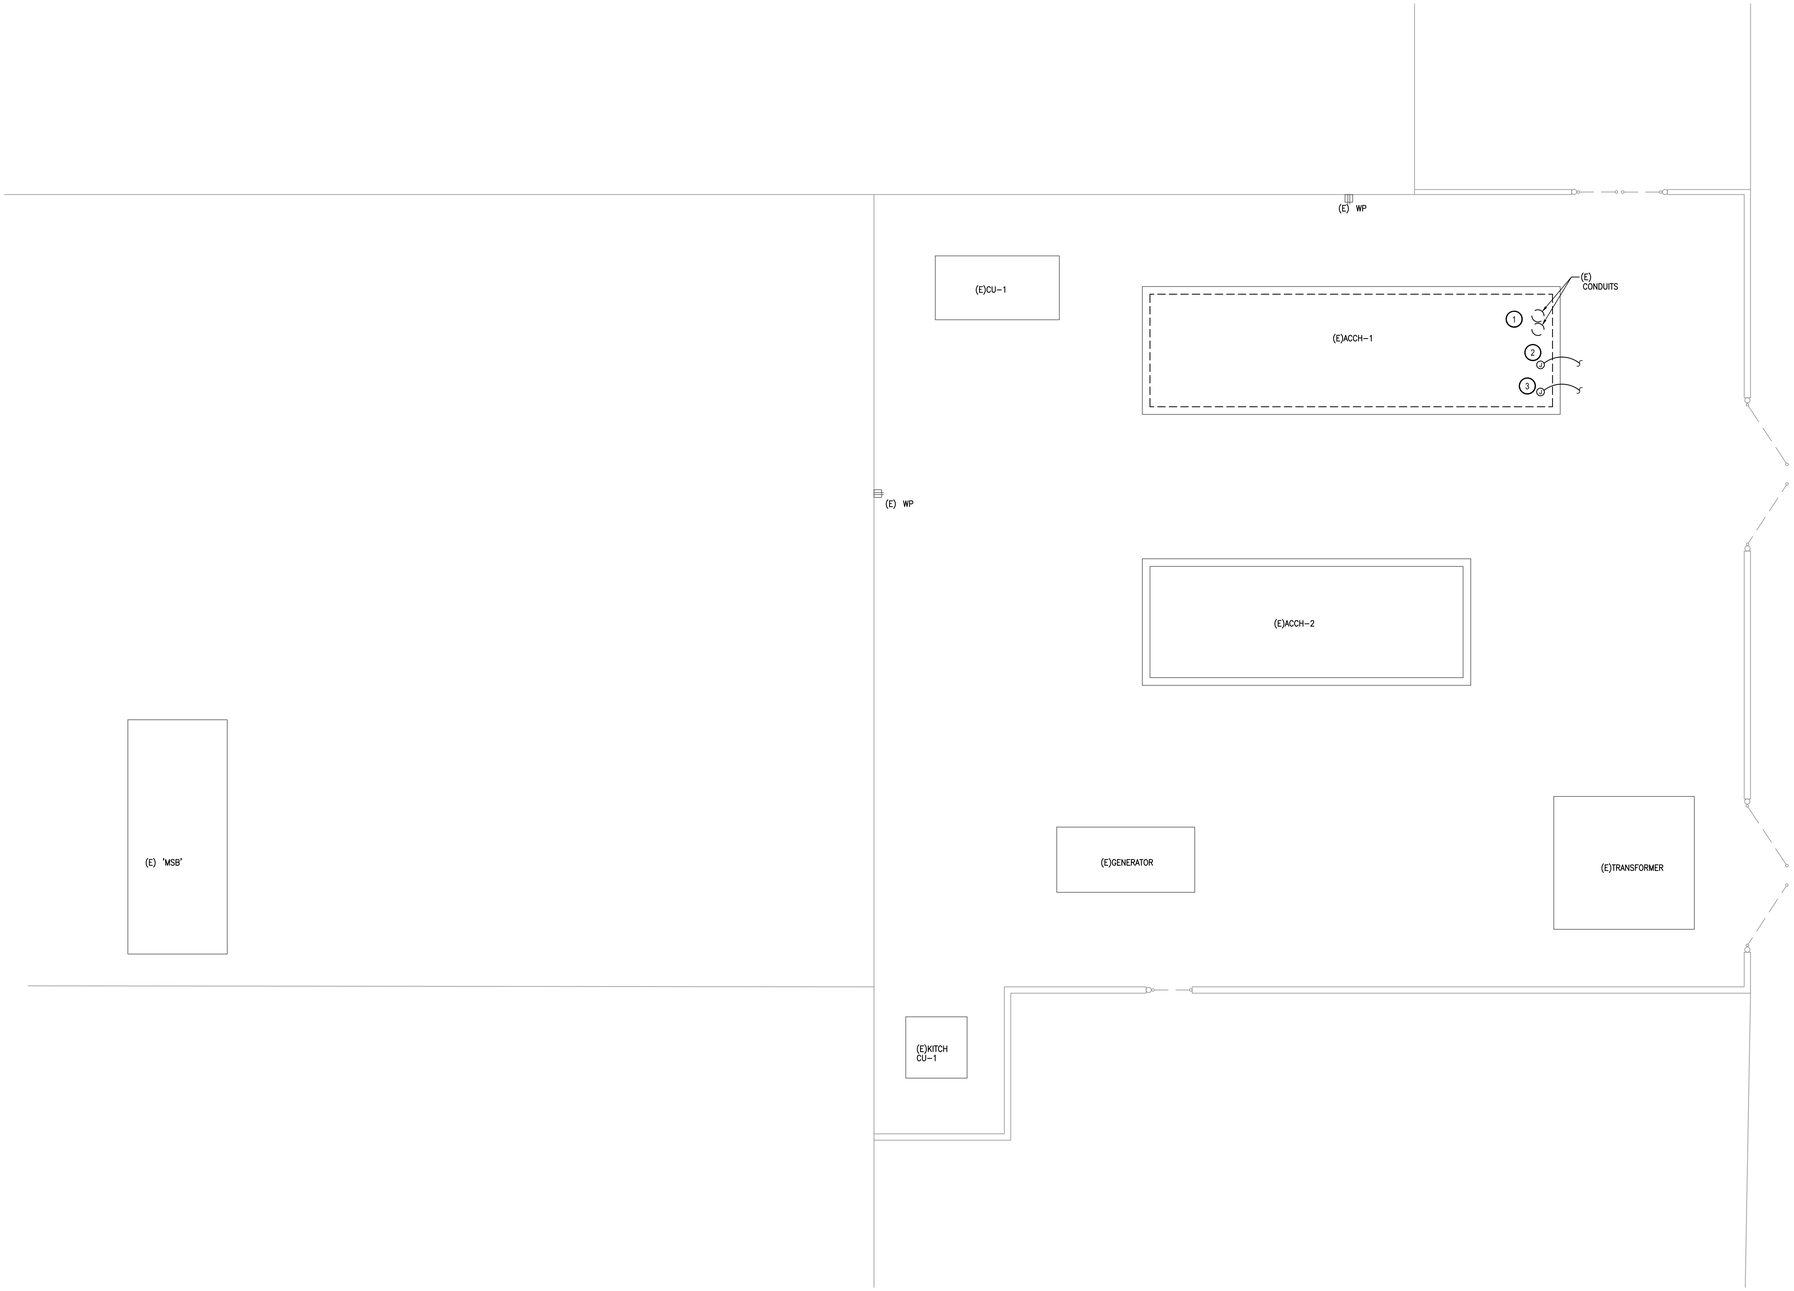

NORTH

1 **ELECTRICAL DEMOLITION FLOOR PLAN - AMELIA ES**
SCALE: 1/4" = 1'-0"

Project No:	2022-01678-00
Drawn By:	AH
Checked By:	JZ
Date:	05-16-2022
Revision Dates:	

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD
Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
05-16-2022

ELECTRICAL
DEMOLITION FLOOR
PLAN - AMELIA ES

E0.1

SYMBOL SCHEDULE

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
LIGHTING (LETTER DENOTES TYPE – SEE LIGHT FIXTURE SCHEDULE)	
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED ON EMERGENCY CIRCUIT
	DOWNLIGHT FIXTURE
	DOWNLIGHT FIXTURE ON EMERGENCY CIRCUIT
	LIGHT FIXTURE – WALL MOUNTED
	LIGHT FIXTURE – WALL MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – CEILING MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – WALL MOUNTED ON EMERGENCY CIRCUIT
LIGHTING CONTROLS & DEVICES	
$	SINGLE POLE SWITCH
$3	3–WAY SWITCH
$4	4–WAY SWITCH
$K	KEYED SWITCH
$D	WALL BOX DIMMER, SIZE AND TYPE AS REQUIRED
$P	PILOT LIGHT SWITCH
$T	6–HOUR ROTARY TIMER SWITCH WITH NO HOLD U.N.O.
	PUSH BUTTON EPO SWITCH (KEY RESET) WITH COVER
$MC	MOMENTARY CONTACT SWITCH
$R	LOW VOLTAGE DIGITAL KEYPAD
$B	BUILDING MANAGEMENT (BMCS) LOCAL OVERRIDE SWITCH
	OCCUPANCY SENSOR (AUTO ON / AUTO OFF WITHIN 20–MINUTES)
	VACANCY SENSOR (MANUAL ON / AUTO OFF WITHIN 10–MINUTES)
	PHOTOCELL SENSOR
R#	LIGHTING CONTROL SYSTEM. ('#' DENOTES TYPE – SEE LIGHTING CONTROLS SCHEDULE)
ER	UL924 EMERGENCY LOAD CONTROL RELAY UNLESS NOTED OTHERWISE.
RECEPTACLES AND OUTLETS	
	SIMPLEX RECEPTACLE
	DUPLEX RECEPTACLE
U	DUPLEX RECEPTACLE WITH TWO USB CHARGING PORTS.
	125/250 VOLT, 1 PHASE, 3–WIRE, 20 AMPS UNLESS NOTED OTHERWISE
	DOUBLE DUPLEX IN 2–GANG BOX WITH SINGLE COVER PLATE
U	DOUBLE DUPLEX WITH TWO USB CHARGING PORTS IN 2–GANG BOX WITH SINGLE COVER PLATE
	DOUBLE DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE IN 2–GANG BOX WITH SINGLE COVER PLATE
	DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE
	FLUSH FLOOR DUPLEX RECEPTACLE OUTLET
	FLUSH FLOOR DOUBLE DUPLEX RECEPTACLE OUTLET
D/A	CONCEALED SERVICE MULTI–ACCESS FLOOR BOX WITH DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTITIES.
D/A	CONCEALED SERVICE MULTI–ACCESS FLOOR BOX WITH DOUBLE DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTITIES.
	JUNCTION BOX
	FLUSH REMOTE GFCI DEVICE (LOCATE IN READILY ACCESSIBLE LOCATION)
MOTOR CONTROLLERS AND EQUIPMENT	
	MOTOR, MAKE FINAL MOTOR CONNECTION
M	MOTOR–RATED SWITCH. 20A UNLESS INDICATED OTHERWISE.
	EQUIPMENT INTEGRAL DISCONNECT
J	COMBINATION MOTOR STARTER/DISCONNECT SWITCH AS REQUIRED
	MOTOR STARTER
	PREWIRED DEVICE, MAKE ELECTRICAL FINAL CONNECTIONS
VFD	VARIABLE FREQUENCY DRIVE MOTOR CONTROLLER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
HF	HIGH EFFICIENCY HARMONIC FILTER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
T	LOW VOLTAGE TRANSFORMER, SIZE AND TYPE AS REQUIRED.
Y	CHIME/BUZZER
ELECTRICAL EQUIPMENT	
	ELECTRICAL PANELBOARD; REFER TO FLOOR PLANS FOR VOLTAGE.
	DRY TYPE TRANSFORMER
	PLYWOOD TELEPHONE BACKBOARD
CIRCUITING	
	CONDUIT
	CONDUIT BELOW FLOOR, SLAB, OR GRADE
	3/4"C. UNLESS OTHERWISE NOTED; LONG HATCH, NEUTRAL; SHORT HATCH, PHASE; LONG HATCH & HOOK, INSULATED GROUND. NO HATCHES INDICATES 2 CONDUCTORS. ARROW INDICATES HOMERUN.
	PARTIAL ELECTRICAL HOME RUN
SUBSCRIPTS AND ABBREVIATIONS	
WP	INDICATES "WEATHERPROOF"
H	INDICATES "HORIZONTAL"
NL	INDICATES "NIGHT LIGHT".
TP	INDICATES "TAMPER PROOF"
(KS)	INDICATES "KNEE SPACE". LOCATE WIRING DEVICE IN KNEESPACE
U.N.O.	INDICATES "UNLESS NOTED OTHERWISE"
(E)	INDICATES EXISTING TO REMAIN
(R)	INDICATES REPLACE DEVICE AND COVERPLATE.
•	NEXT TO ANY SYMBOL INDICATES FINAL ROUGH–IN FIELD COORDINATION BY CONTRACTOR WITH ARCHITECTURAL MILLWORK DRAWINGS AND OTHER TRADES

GENERAL NOTES:

–ALL EXTERIOR BUILDING ELECTRICAL EQUIPMENT TO BE WEATHERPROOF NEMA–3RX MINIMUM.
–ALL EXTERIOR RECEPTACLES SHALL BE WATER RESISTANT TYPE.

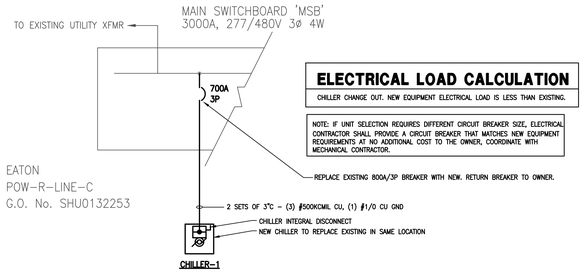

ELECTRICAL LOAD CALCULATION

CHILLER CHANGE OUT. NEW EQUIPMENT ELECTRICAL LOAD IS LESS THAN EXISTING.

NOTE: IF UNIT SELECTION REQUIRES DIFFERENT CIRCUIT BREAKER SIZE, ELECTRICAL CONTRACTOR SHALL PROVIDE A CIRCUIT BREAKER THAT MATCHES NEW EQUIPMENT REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER. COORDINATE WITH MECHANICAL CONTRACTOR.

2 **PARTIAL ONE–LINE DIAGRAM**
SCALE: NONE

ELECTRICAL GENERAL NOTES:

1. ALL EMPTY CONDUIT SHALL HAVE PULL STRING.
2. EACH CONDUIT SHALL BE LIMITED TO (3) CIRCUITS MAXIMUM.
3. ALL EXISTING EQUIPMENT SHALL REMAIN OPERATIONAL.

SYMBOL LEGEND

RENOVATIONS	
	EXISTING TO REMAIN EQUIPMENT
	NEW

ELECTRICAL KEYED NOTES:

1. CONNECT NEW MECHANICAL EQUIPMENT USING NEW CONDUITS & CONDUCTORS; SEE ONE LINE DIAGRAM. RECONNECT EQUIPMENT ELECTRODE CONDUCTOR. REPLACE ELECTRODE GROUNDING CONDUCTOR WITH NEW, USE #6 CU MINIMUM. PROVIDE GROUNDING RODS AS REQUIRED.
2. RECONNECT ALL EQUIPMENT RELATED CONNECTIONS VIA EXISTING CONDUITS. EXTEND EXISTING CONDUITS TO ACCOMMODATE NEW POINT OF CONNECTION AS REQUIRED. PROVIDE ADDITIONAL WP JUNCTION BOXES & CONDUITS AS NECESSARY.
3. PROVIDE ADDITIONAL WP JUNCTION BOXES & CONDUITS TO ACCOMMODATE NEW POINT OF EQUIPMENT CONTROLS CONNECTION AS REQUIRED.
4. PROVIDE 3/4"C WITH (2)#10 CU & (1) #10 CU GND TO PANEL AESLEA. PROVIDE 30A/1P GFIE 30mA BREAKER AT THE PANEL.

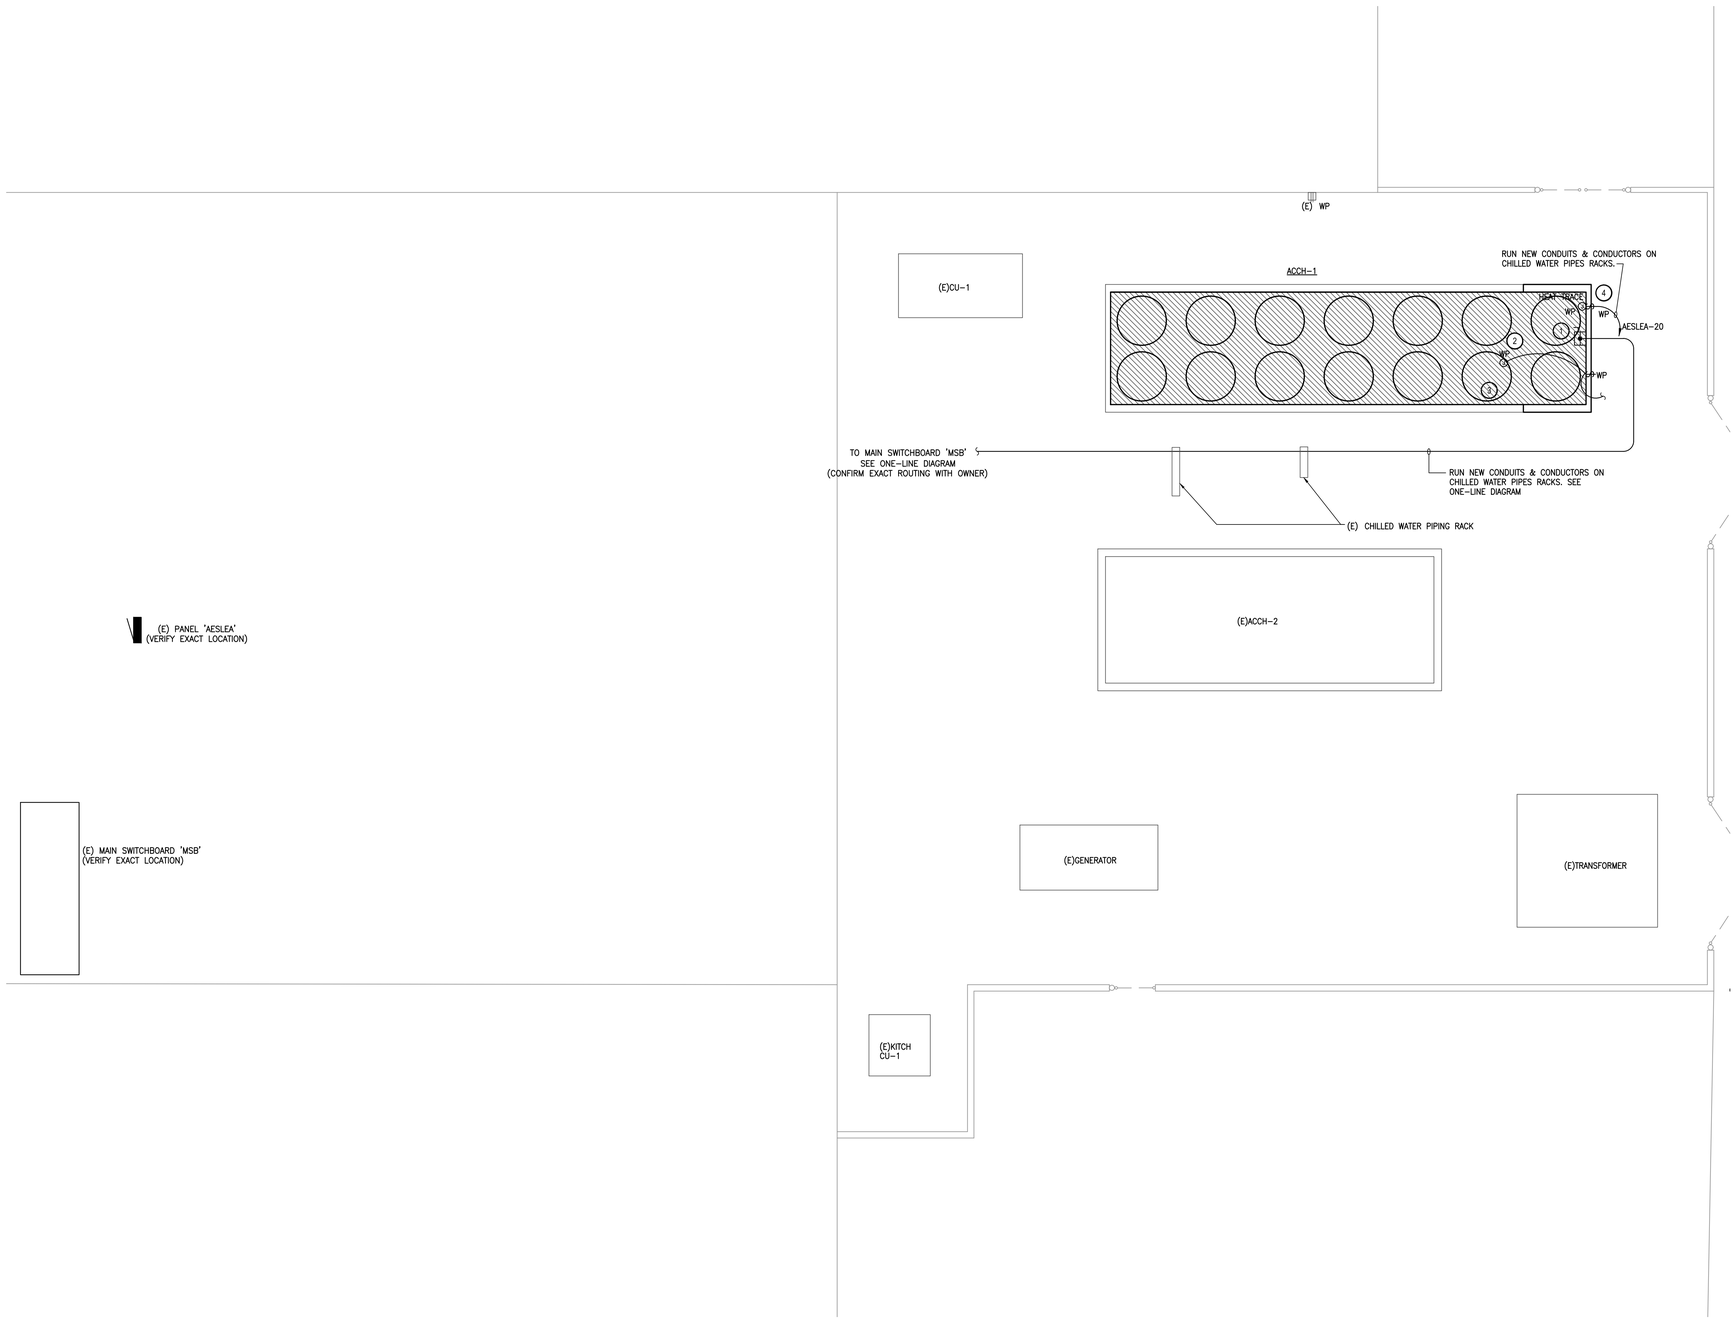

NORTH

1 **ELECTRICAL FLOOR PLAN - AMELIA ES**
SCALE: 1/4" = 1'–0"

Project No:	2022-01678-00
Drawn By:	AH
Checked By:	JZ
Date:	05-16-2022
Revision Dates:	

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT
BISD
Preparing Our Next Generation



ELECTRICAL FLOOR PLAN - AMELIA ES

E1.1

DEMOLITION GENERAL NOTES:

1. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FEILD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.
2. ALL MECHANICAL SYSTEMS SHOWN ON THIS PLAN ARE FROM EXISTING DRAWINGS AND PRELIMINARY FIELD WORK. CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL LOCATIONS AND SIZES OF MECHANICAL SYSTEMS PRIOR TO THE START OF WORK.
3. OWNER SHALL HAVE FIRST RIGHT OF REFUSAL ON ALL HVAC EQUIPMENT BEING REMOVED FROM THIS PROJECT. THIS INCLUDES BUT NOT LIMITED TO INTERNAL COMPONENTS OF CHILLERS, VALVES, AND PIPE STANDS.

DEMOLITION KEYED NOTES:

(1) REMOVE EXISTING CHW S/R PIPING AND ASSOCIATED VALVES UP TO POINT INDICATED. CONTRACTOR SHALL VERIFY EXISTING PIPE SIZE BEFORE DEMOLISHING.

(2) EXISTING CHW S/R PIPING TO REMAIN.

(3) EXISTING AIR COOLED CHILLER SHALL BE REMOVED. EXISTING CONCRETE PAD SHALL REMAIN.

(4) EXISTING PIPING SUPPORTS SHALL REMAIN.

BMCS NOTE:
EXISTING CONTROL SYSTEM IS BY AUTOMATED LOGIC. REFER TO BMCS SPECIFICATION FOR MORE INFORMATION.

DEMO SYMBOL LEGEND	
RENOVATIONS	
	ITEM TO REMAIN
	ITEM TO BE REMOVED

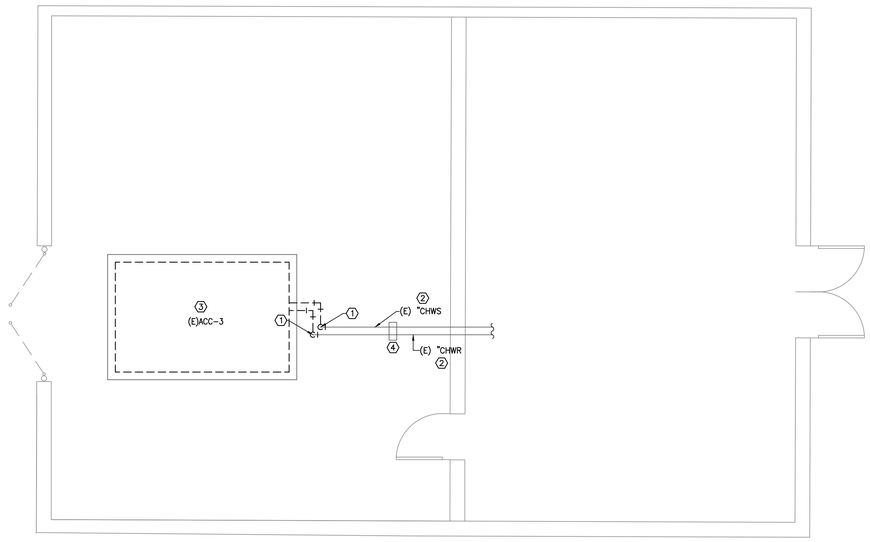

NORTH

1 **MECHANICAL DEMOLITION FLOOR PLAN - BEAUMONT UNITED FH**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED PROFESSIONAL ENGINEER
05-16-2022

MECHANICAL DEMOLITION FLOOR PLAN - BEAUMONT UNITED FH

M0.1

MECHANICAL GENERAL NOTES:

1. MECHANICAL CONTRACTOR SHALL COORDINATE WITH THE ELECTRICAL CONTRACTOR FOR ALL ELECTRICAL POWER REQUIREMENTS.
2. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FIELD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.

MECHANICAL KEYED NOTES:

1. PROVIDE OUTDOOR PIPING INSULATION AS SPECIFIED.
2. PROVIDE NEW CHW S/R PIPING AS SPECIFICED AND CONNECT TO EXISTING PIPING. RE:3/M2.1 FOR PARTIAL PIPING DIAGRAM.
3. VERIFY AIR-COOLED CHILLER SERVICE CLEARANCES WITH MANUFACTURER. COORDINATE WITH OTHER TRADES NOT TO OBSTRUCT.
4. INSTALL NEW CHILLER ON EXISTING CONCRETE PAD. EXTEND EXISTING CONCRETE PAD AS REQUIRED TO ACCOMMODATE NEW CHILLER.
5. POWER CONNECTION FOR NEW CHILLER SHALL BE AT THIS END, SAME LOCATION AS DEMOLISHED CHILLER.

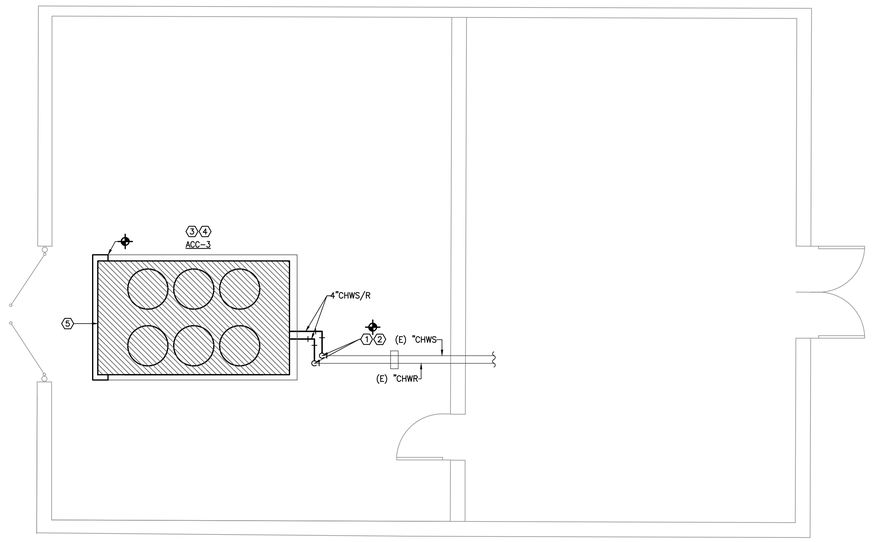

NORTH

1 **MECHANICAL FLOOR PLAN - BEAUMONT UNITED FH**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED PROFESSIONAL ENGINEER
05-16-2022

MECHANICAL FLOOR PLAN - BEAUMONT UNITED FH

M1.1

PACKAGED AIR COOLED SCROLL CHILLER

MARK	ACTUAL CAPACITY (TONS)	LEAVING WATER TEMP. (°F)	GPM	MAXIMUM WATER PRESSURE DROP (FT.)	AMBIENT AIR TEMP. (°F)	CURRENT CHARACTERISTIC	REMARKS
ACC-3	86	44	186.5	20.0	95.0	480/3/60	1,2,3

GENERAL NOTES:

1. MAXIMUM FOULING FACTOR FOR THE EVAPORATOR IS 0.0001
2. MAINTAIN MINIMUM CLEARANCES REQUIRED BY CHILLER MANUFACTURER FOR PROPER AIRFLOW TO FANS AND UNIT. MAINTAIN MINIMUM CLEARANCE AS REQUIRED TO OPEN ACCESS AND CONTROL DOORS ON EQUIPMENT FOR SERVICE, MAINTENANCE AND INSPECTION. MAINTAIN MIMIMUM ELECTRICAL CLEARANCES AS REQUIRED BY NEC.
3. CHILLER SHALL MEET OR EXCEED THE AHRI FULL-LOAD AND PART-LOAD PATH A OR PATH B EFFICIENCIES INDICATED IN THE 2015 IECC.

REMARKS:

1. PROVIDE WITH LOW AMBIENT HEAD PRESSURE CONTROL.
2. PROVIDE WITH INTEGRAL MAIN ELECTRICAL DISCONNECT SWITCH.
3. PROVIDE WITH INSULATION ON ALL SUCTION LINES.

SYMBOL LEGEND

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
GENERAL	
(#)	KEY NOTE TAG
(#)	NOTE SPECIFIC TO DETAIL TAG
A	REVISION TAG
	NEW EQUIPMENT
PIPING	
—D—	CONDENSATE DRAIN LINE
—AD—	AUXILLARY CONDENSATE DRAIN LINE
—RLR—	REFRIGERANT LIQUID & GAS RECIRCULATION LINE (TOTAL OF TWO PIPES, ONLY ONE PIPE SHOWN FOR DRAWING CLARITY)
—RL—	REFRIGERANT LIQUID LINE
—HG—	REFRIGERANT HOT GAS LINE
—RS—	REFRIGERANT SUCTION LINE
	ELBOW UP
	ELBOW DOWN
	90° ELBOW
	45° ELBOW
	TEE
	TEE DOWN
	TEE UP
	TOP BRANCH CONNECTION
	BOTTOM BRANCH CONNECTION
	FLANGE
	CAP
	CONTINUATION
	FLOOR DRAIN (REFER TO PLUMBING DRAWINGS)
	PIPE GUIDE
SUBSCRIPTS AND ABREVIATIONS	
AFF	ABOVE FINISHED FLOOR
BBS	BELOW BOTTOM OF STRUCTURE
BOD	BOTTOM OF DUCT
BOP	BOTTOM OF PIPE
CA	COMBUSTION AIR
CFM	CUBIC FEET PER MINUTE
EA	EXHAUST AIR
FPM	FEET PER MINUTE
NC	NORMALLY CLOSED
NO	NORMALLY OPEN
OA	OUTSIDE AIR
RA	RETURN AIR
SA	SUPPLY AIR
RENOVATIONS	
	POINT OF CONNECTION FROM NEW TO EXISTING
	ITEM TO REMAIN
	ITEM TO BE REMOVED

MS03



MECHANICAL KEYED NOTES

1. CONTRACTOR SHALL FIELD VERIFY EXISTING PIPE SIZES.
2. INSTALL NEW CHILLER ON EXISTING CONCRETE HOUSEKEEPING PAD. EXTEND EXISTING HOUSEKEEPING PAD AS REQUIRED TO ACCOMMODATE NEW CHILLER.
3. PROVIDE ALL OUTDOOR PIPING WITH INSULATION AND ALUMINUM JACKETING AS SPECIFIED.
4. PROVIDE INLINE STRAINER IN VERTICAL PIPE WITH 1" DRAIN LINE.
5. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.
6. BALANCING VALVE TO BE PROVIDED WITH INFINITE POSITION CRANK OR MEMORY STOP FOR BALANCING SERVICE.

3 CHILLED WATER PIPING DIAGRAM

SCALE: NO SCALE



NOTES: 1. SEE TEMPERATURE TEST WELL DETAIL FOR MOUNTING ARRANGEMENTS AND CLEARANCES
2. MOUNT TO BE READABLE FROM FLOOR AT 5'-6" EYE LEVEL (7'-0" MAX.)

2 THERMOMETER INSTALLATION

SCALE: NONE CP009



MECHANICAL KEYED NOTES

1. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.

1 TYPICAL PIPING AT INLET AND OUTLET OF CHILLER

SCALE: NONE

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
STATE OF TEXAS
05-16-2022

MECHANICAL DETAILS AND SCHEDULES - BEAUMONT UNITED FH

M2.1

DEMO SYMBOL LEGEND

RENOVATIONS	
	EXISTING TO REMAIN
- - - -	DISCONNECT & REMOVED EQUIPMENT

ELECTRICAL KEYED NOTES

1. DISCONNECT & REMOVE EXISTING EQUIPMENT WITH ASSOCIATED DISCONNECT & CONDUCTORS ALL THE WAY BACK TO SOURCE. SAW CUT ABANDONED EXPOSED CONDUITS TO FLUSH MOUNT THE GROUND LEVEL, ABANDON UNDERGROUND CONDUITS IN PLACE & PROVIDE COVER.
2. DISCONNECT ALL EQUIPMENT CONNECTIONS. KEEP EXISTING CONDUITS IN PLACE FOR CONNECTION OF NEW EQUIPMENT. FIELD VERIFY CIRCUIT(S) ORIGINATION(S).
3. KEEP EXISTING CONTROLS CONDUITS IN PLACE & EXTEND TO NEW CHILLER AS REQUIRED.
4. REMOVE EXISTING DISCONNECT. SAW CUT ABANDONED CONDUITS TO FLUSH MOUNT THE FLOOR. ABANDON UNDERGROUND CONDUITS IN PLACE. RETURN DISCONNECT TO OWNER.

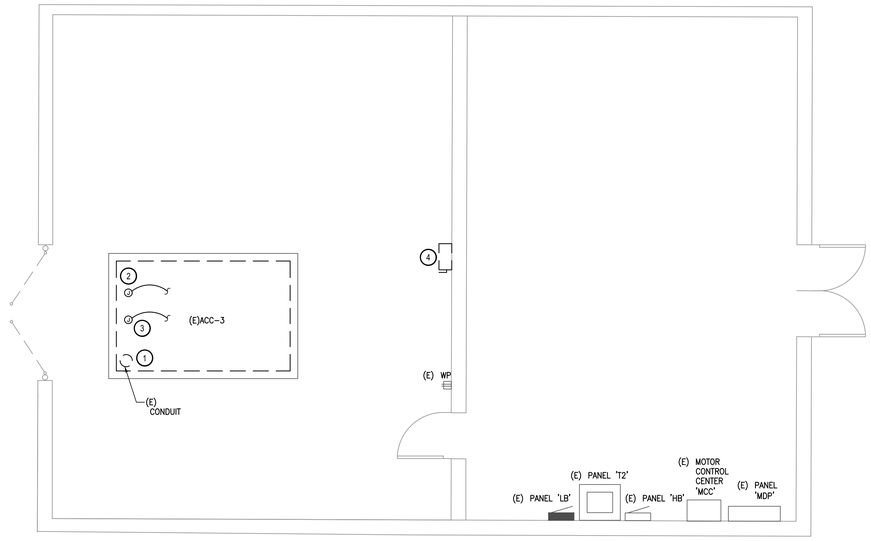

NORTH

1 **ELECTRICAL DEMOLITION FLOOR PLAN - BEAUMONT UNITED FH**
SCALE: 1/4" = 1'-0"

Project No:	2022-01678-00
Drawn By:	AH
Checked By:	JZ
Date:	05-16-2022
Revision Dates:	

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN
expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD
Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL
ENGINEER
05-16-2022

ELECTRICAL DEMOLITION FLOOR PLAN - BEAUMONT UNITED FH

E0.1

SYMBOL SCHEDULE

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
LIGHTING (LETTER DENOTES TYPE – SEE LIGHT FIXTURE SCHEDULE)	
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED ON EMERGENCY CIRCUIT
	DOWNLIGHT FIXTURE
	DOWNLIGHT FIXTURE ON EMERGENCY CIRCUIT
	LIGHT FIXTURE – WALL MOUNTED
	LIGHT FIXTURE – WALL MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – CEILING MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – WALL MOUNTED ON EMERGENCY CIRCUIT
LIGHTING CONTROLS & DEVICES	
$	SINGLE POLE SWITCH
$3	3–WAY SWITCH
$4	4–WAY SWITCH
$K	KEYED SWITCH
$D	WALL BOX DIMMER, SIZE AND TYPE AS REQUIRED
$P	PILOT LIGHT SWITCH
$T	6–HOUR ROTARY TIMER SWITCH WITH NO HOLD U.N.O.
	PUSH BUTTON EPO SWITCH (KEY RESET) WITH COVER
$MC	MOMENTARY CONTACT SWITCH
$R	LOW VOLTAGE DIGITAL KEYPAD
$B	BUILDING MANAGEMENT (BMCS) LOCAL OVERRIDE SWITCH
	OCCUPANCY SENSOR (AUTO ON / AUTO OFF WITHIN 20–MINUTES)
	VACANCY SENSOR (MANUAL ON / AUTO OFF WITHIN 10–MINUTES)
	PHOTOCELL SENSOR
LC#	LIGHTING CONTROL SYSTEM. ('#' DENOTES TYPE – SEE LIGHTING CONTROLS SCHEDULE)
LR	UL924 EMERGENCY LOAD CONTROL RELAY UNLESS NOTED OTHERWISE.
RECEPTACLES AND OUTLETS	
	SIMPLEX RECEPTACLE
	DUPLEX RECEPTACLE
U	DUPLEX RECEPTACLE WITH TWO USB CHARGING PORTS.
	125/250 VOLT, 1 PHASE, 3–WIRE, 20 AMPS UNLESS NOTED OTHERWISE
	DOUBLE DUPLEX IN 2–GANG BOX WITH SINGLE COVER PLATE
U	DOUBLE DUPLEX WITH TWO USB CHARGING PORTS IN 2–GANG BOX WITH SINGLE COVER PLATE
	DOUBLE DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE IN 2–GANG BOX WITH SINGLE COVER PLATE
	DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE
	FLUSH FLOOR DUPLEX RECEPTACLE OUTLET
	FLUSH FLOOR DOUBLE DUPLEX RECEPTACLE OUTLET
DA	CONCEALED SERVICE MULTI–ACCESS FLOOR BOX WITH DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
DA	CONCEALED SERVICE MULTI–ACCESS FLOOR BOX WITH DOUBLE DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
	JUNCTION BOX
G	FLUSH REMOTE GFCI DEVICE (LOCATE IN READILY ACCESSIBLE LOCATION)
MOTOR CONTROLLERS AND EQUIPMENT	
	MOTOR, MAKE FINAL MOTOR CONNECTION
SM	MOTOR–RATED SWITCH. 20A UNLESS INDICATED OTHERWISE.
	INTEGRAL EQUIPMENT DISCONNECT
#	COMBINATION MOTOR STARTER/DISCONNECT SWITCH AS REQUIRED
	MOTOR STARTER
	PREWIRED DEVICE, MAKE ELECTRICAL FINAL CONNECTIONS
VFD	VARIABLE FREQUENCY DRIVE MOTOR CONTROLLER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
HF	HIGH EFFICIENCY HARMONIC FILTER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
T	LOW VOLTAGE TRANSFORMER, SIZE AND TYPE AS REQUIRED.
Y	CHIME/BUZZER
ELECTRICAL EQUIPMENT	
	ELECTRICAL PANELBOARD; REFER TO FLOOR PLANS FOR VOLTAGE.
	DRY TYPE TRANSFORMER
	PLYWOOD TELEPHONE BACKBOARD
CIRCUITING	
	CONDUIT
	CONDUIT BELOW FLOOR, SLAB, OR GRADE
	3/4"C. UNLESS OTHERWISE NOTED; LONG HATCH, NEUTRAL; SHORT HATCH, PHASE; LONG HATCH & HOOK, INSULATED GROUND. NO HATCHES INDICATES 2 CONDUCTORS. ARROW INDICATES HOMERUN.
	PARTIAL ELECTRICAL HOME RUN
SUBSCRIPTS AND ABBREVIATIONS	
WP	INDICATES 'WEATHERPROOF'
H	INDICATES 'HORIZONTAL'
NL	INDICATES 'NIGHT LIGHT'.
TP	INDICATES 'TAMPER PROOF'
(KS)	INDICATES 'KNEE SPACE'. LOCATE WIRING DEVICE IN KNEESPACE
U.N.O.	INDICATES 'UNLESS NOTED OTHERWISE'
(E)	INDICATES EXISTING TO REMAIN
(R)	INDICATES REPLACE DEVICE AND COVERPLATE.
•	NEXT TO ANY SYMBOL INDICATES FINAL ROUGH–IN FIELD COORDINATION BY CONTRACTOR WITH ARCHITECTURAL MILLWORK DRAWINGS AND OTHER TRADES

GENERAL NOTES:

–ALL EXTERIOR BUILDING ELECTRICAL EQUIPMENT TO BE WEATHERPROOF NEMA–3RX MINIMUM.
–ALL EXTERIOR RECEPTACLES SHALL BE WATER RESISTANT TYPE.

ELECTRICAL GENERAL NOTES:

1. ALL EMPTY CONDUIT SHALL HAVE PULL STRING.
2. EACH CONDUIT SHALL BE LIMITED TO (3) CIRCUITS MAXIMUM.
3. ALL EXISTING EQUIPMENT SHALL REMAIN OPERATIONAL.

SYMBOL LEGEND

RENOVATIONS	
	EXISTING TO REMAIN EQUIPMENT
	NEW

ELECTRICAL KEYED NOTES:

1. CONNECT NEW MECHANICAL EQUIPMENT USING NEW CONDUITS & CONDUCTORS; SEE ONE LINE DIAGRAM. RECONNECT EQUIPMENT ELECTRODE CONDUCTOR. REPLACE ELECTRODE GROUNDING CONDUCTOR WITH NEW, USE #6 CU MINIMUM. PROVIDE GROUNDING RODS AS REQUIRED.
2. RECONNECT ALL EQUIPMENT RELATED CONNECTIONS VIA EXISTING CONDUITS. EXTEND EXISTING CONDUITS TO ACCOMMODATE NEW POINT OF CONNECTION AS REQUIRED. PROVIDE ADDITIONAL WP JUNCTION BOXES & CONDUITS AS NECESSARY.
3. PROVIDE ADDITIONAL WP JUNCTION BOXES & CONDUITS TO ACCOMMODATE NEW POINT OF EQUIPMENT CONTROLS CONNECTION AS REQUIRED.
4. PROVIDE 3/4"C WITH (2)#10 CU & (1) #10 CU GND TO PANEL. PROVIDE 30A/1P GFIE 30mA BREAKER AT THE PANEL.

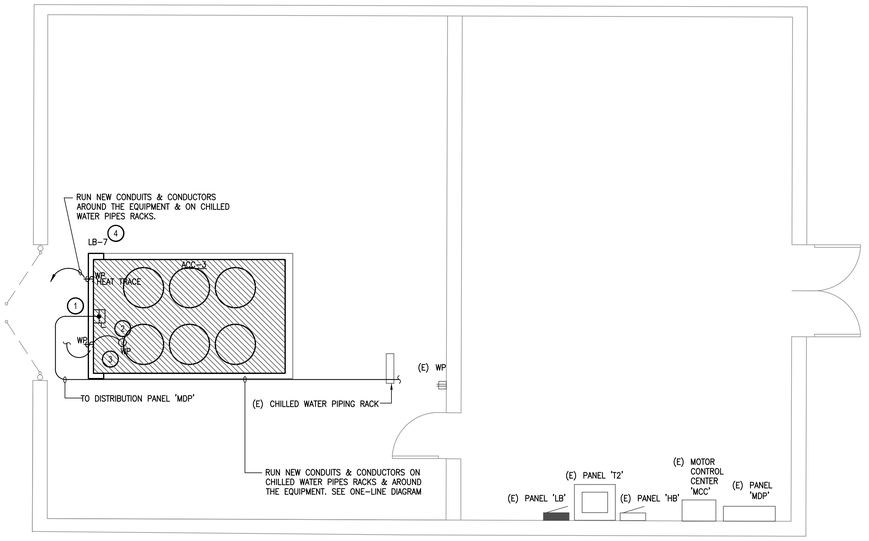

NORTH 1 **ELECTRICAL FLOOR PLAN - BEAUMONT UNITED FH**
SCALE: 1/4" = 1'-0"

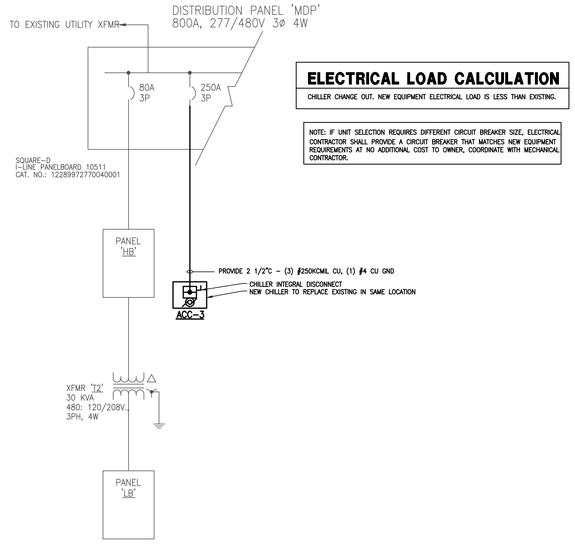

ELECTRICAL LOAD CALCULATION

CHILLER CHANGE OUT. NEW EQUIPMENT ELECTRICAL LOAD IS LESS THAN EXISTING.

NOTE: IF UNIT SELECTION REQUIRES DIFFERENT CIRCUIT BREAKER SIZE, ELECTRICAL CONTRACTOR SHALL PROVIDE A CIRCUIT BREAKER THAT MATCHES NEW EQUIPMENT REQUIREMENTS AT NO ADDITIONAL COST TO OWNER. COORDINATE WITH MECHANICAL CONTRACTOR.

2 **PARTIAL ONE-LINE DIAGRAM**
SCALE: NONE

Project No: 2022-01678-00
Drawn By: AH
Checked By: JZ
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT
BISD Preparing Our Next Generation



ELECTRICAL FLOOR PLAN - BEAUMONT UNITED FH

E1.1

DEMOLITION GENERAL NOTES:

1. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FEILD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.
2. ALL MECHANICAL SYSTEMS SHOWN ON THIS PLAN ARE FROM EXISTING DRAWINGS AND PRELIMINARY FIELD WORK. CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL LOCATIONS AND SIZES OF MECHANICAL SYSTEMS PRIOR TO THE START OF WORK.
3. OWNER SHALL HAVE FIRST RIGHT OF REFUSAL ON ALL HVAC EQUIPMENT BEING REMOVED FROM THIS PROJECT. THIS INCLUDES BUT NOT LIMITED TO INTERNAL COMPONENTS OF CHILLERS, VALVES, AND PIPE STANDS.

DEMOLITION KEYED NOTES:

1. REMOVE EXISTING CHW S/R PIPING AND ASSOCIATED VALVES UP TO POINT INDICATED.
2. EXISTING CHW S/R PIPING TO REMAIN.
3. EXISTING PUMP, CONCRETE PAD, AND ALL ASSOCIATED APPURTENANCES SHALL REMAIN.
4. EXISTING AIR COOLED CHILLER SHALL BE REMOVED. EXISTING CONCRETE PAD SHALL REMAIN.
5. EXISTING EXPANSION TANK, PIPING, AND ALL ASSOCIATED APPURTENANCES SHALL REMAIN.
6. EXISTING AIR SEPARATOR, PIPING, AND ALL ASSOCIATED APPURTENANCES SHALL REMAIN.
7. EXISTING BOILER SHALL REMAIN.
8. EXISTING PIPING SUPPORTS SHALL REMAIN.

BMCS NOTE:
EXISTING CONTROL SYSTEM IS BY AUTOMATED LOGIC. REFER TO BMCS SPECIFICATION FOR MORE INFORMATION.

DEMO SYMBOL LEGEND

RENOVATIONS	
	ITEM TO REMAIN
	ITEM TO BE REMOVED

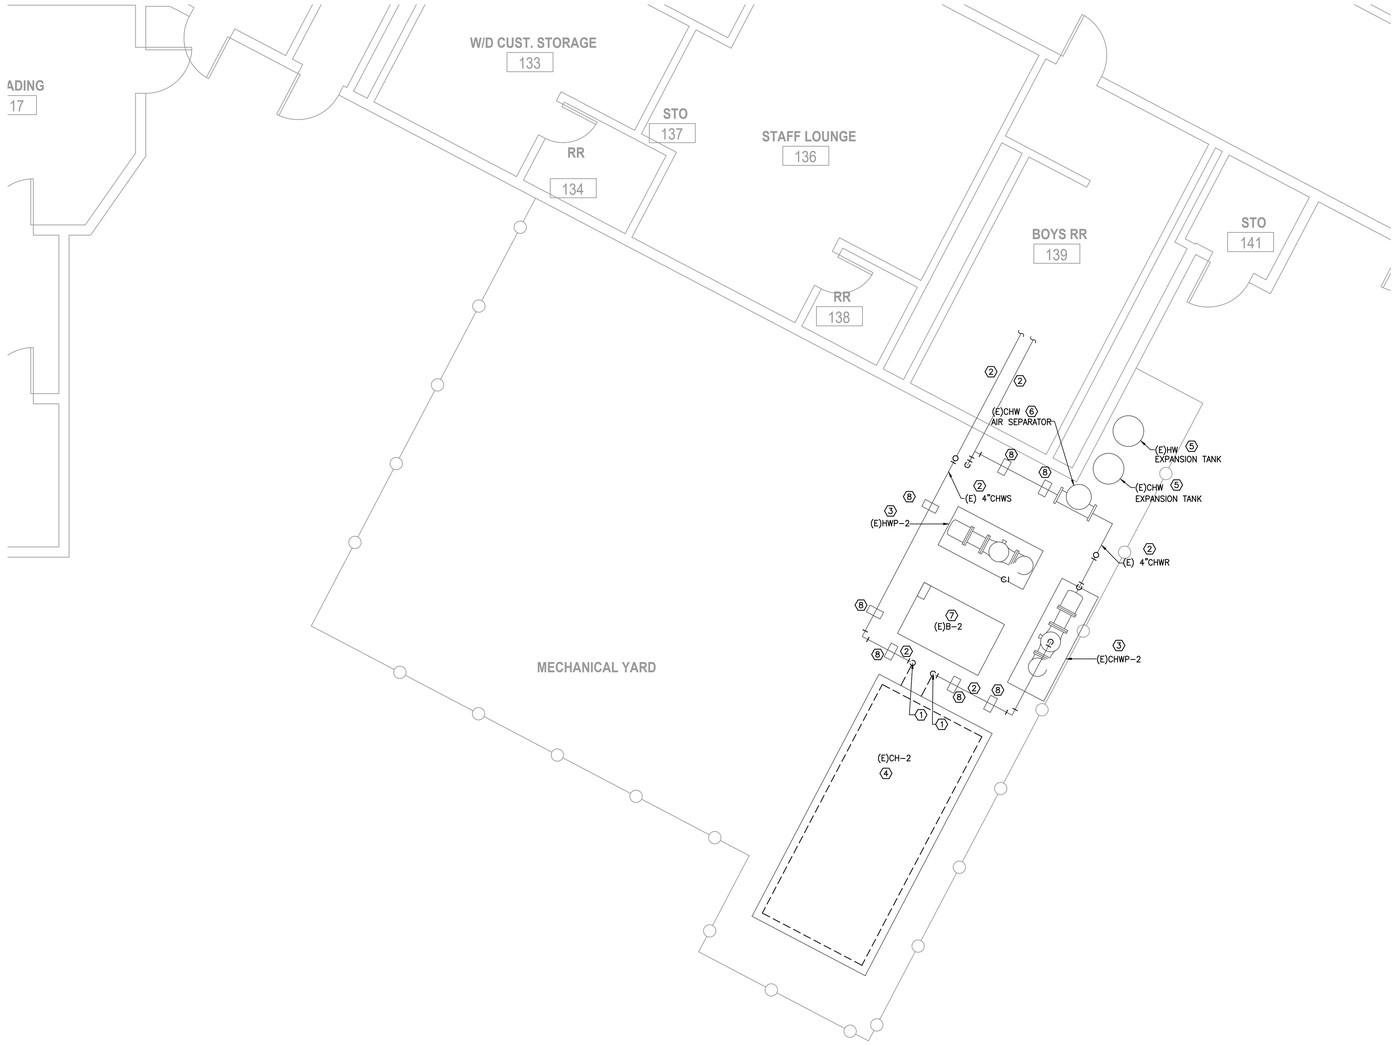

NORTH

1 **MECHANICAL DEMOLITION FLOOR PLAN - BINGMAN HEAD START**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



MECHANICAL DEMOLITION FLOOR PLAN - BINGMAN HEAD START

M0.1

MECHANICAL GENERAL NOTES:

1. MECHANICAL CONTRACTOR SHALL COORDINATE WITH THE ELECTRICAL CONTRACTOR FOR ALL ELECTRICAL POWER REQUIREMENTS.
2. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FIELD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.

MECHANICAL KEYED NOTES:

1. PROVIDE OUTDOOR PIPING INSULATION AS SPECIFIED.
2. PROVIDE NEW CHW S/R PIPING AS SPECIFICED AND CONNECT TO EXISTING PIPING. RE:3/M2.1 FOR PARTIAL PIPING DIAGRAM.
3. VERIFY AIR-COOLED CHILLER SERVICE CLEARANCES WITH MANUFACTURER. COORDINATE WITH OTHER TRADES NOT TO OBSTRUCT.
4. INSTALL NEW CHILLER ON EXISTING CONCRETE PAD. EXTEND EXISTING CONCRETE PAD AS REQUIRED FOR NEW CHILLER.
5. POWER CONNECTION FOR NEW CHILLER SHALL BE AT THIS END, SAME LOCATION AS DEMOLISHED CHILLER.

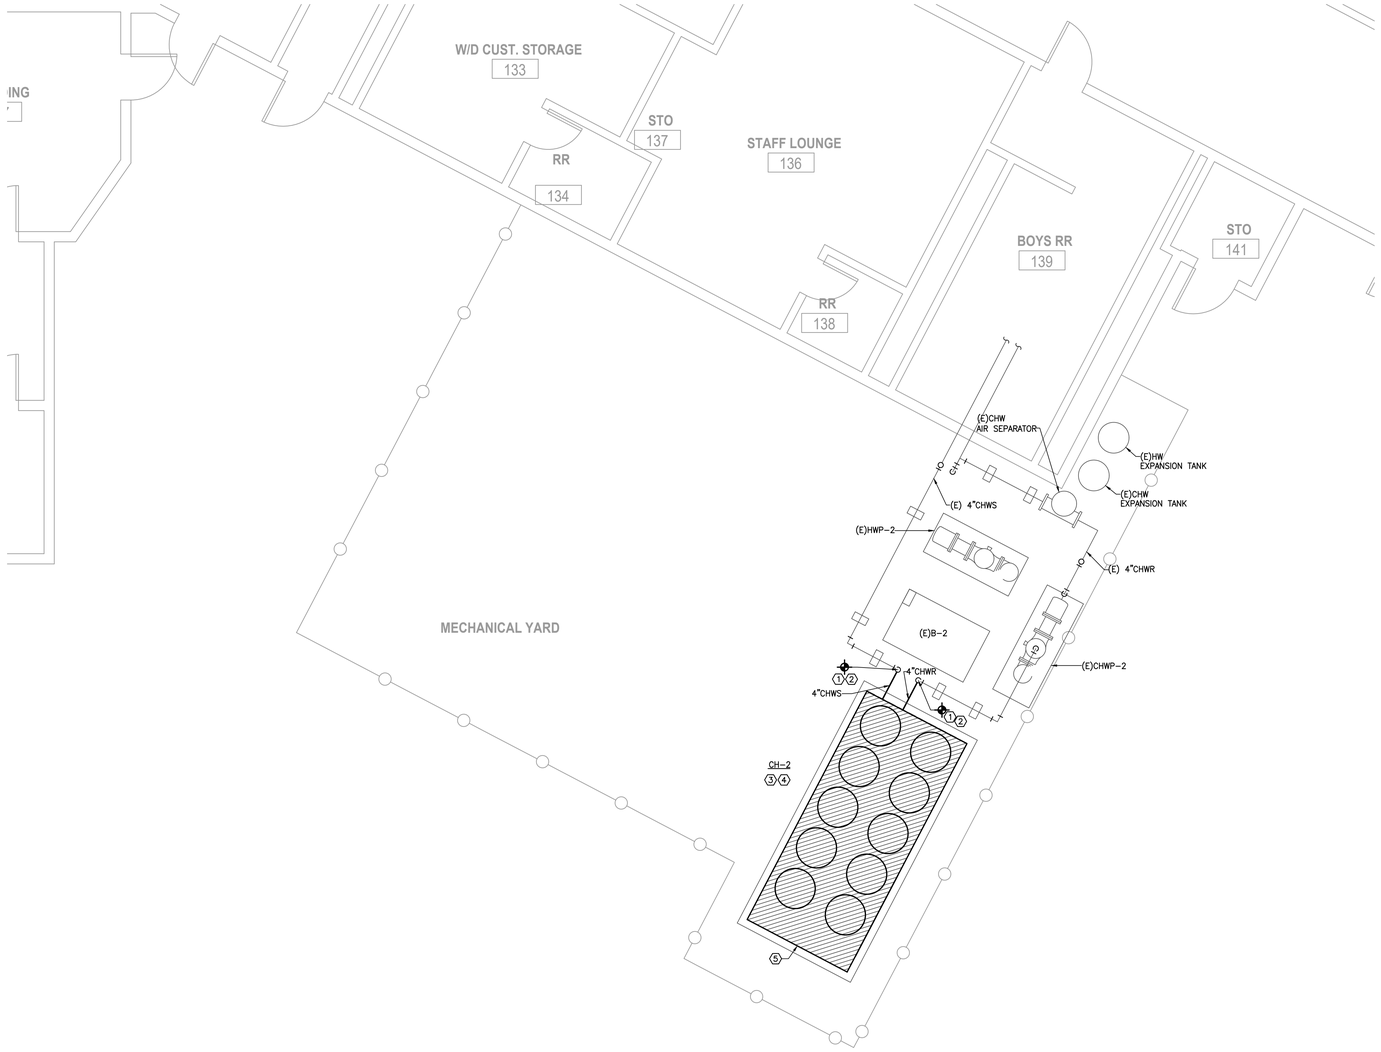

NORTH

1 **MECHANICAL FLOOR PLAN - BINGMAN HEAD START**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN
expect a difference

10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD
Preparing Our Next Generation

STATE OF TEXAS
BRADLEY KALMANS
80219
LICENSED PROFESSIONAL ENGINEER
05-16-2022

MECHANICAL FLOOR PLAN - BINGMAN HEAD START

M1.1

PACKAGED AIR COOLED SCROLL CHILLER

MARK	ACTUAL CAPACITY (TONS)	LEAVING WATER TEMP. (°F)	GPM	MAXIMUM WATER PRESSURE DROP (FT.)	AMBIENT AIR TEMP. (°F)	CURRENT CHARACTERISTIC	REMARKS
CH-2	124	44	278	20.0	95.0	208/3/60	1,2,3

GENERAL NOTES:

1. MAXIMUM FOULING FACTOR FOR THE EVAPORATOR IS 0.0001
2. MAINTAIN MINIMUM CLEARANCES REQUIRED BY CHILLER MANUFACTURER FOR PROPER AIRFLOW TO FANS AND UNIT. MAINTAIN MINIMUM CLEARANCE AS REQUIRED TO OPEN ACCESS AND CONTROL DOORS ON EQUIPMENT FOR SERVICE, MAINTENANCE AND INSPECTION. MAINTAIN MIMMUM ELECTRICAL CLEARANCES AS REQUIRED BY NEC.
3. CHILLER SHALL MEET OR EXCEED THE AHRI FULL-LOAD AND PART-LOAD PATH A OR PATH B EFFICIENCIES INDICATED IN THE 2015 IECC.

REMARKS:

1. PROVIDE WITH LOW AMBIENT HEAD PRESSURE CONTROL.
2. PROVIDE WITH INTEGRAL MAIN ELECTRICAL DISCONNECT SWITCH.
3. PROVIDE WITH INSULATION ON ALL SUCTION LINES.

SYMBOL LEGEND

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
GENERAL	
(#)	KEY NOTE TAG
(#)	NOTE SPECIFIC TO DETAIL TAG
A	REVISION TAG
	NEW EQUIPMENT
PIPING	
—D—	CONDENSATE DRAIN LINE
—AD—	AUXILLARY CONDENSATE DRAIN LINE
—RLR—	REFRIGERANT LIQUID & GAS RECIRCULATION LINE (TOTAL OF TWO PIPES, ONLY ONE PIPE SHOWN FOR DRAWING CLARITY)
—RL—	REFRIGERANT LIQUID LINE
—HG—	REFRIGERANT HOT GAS LINE
—RS—	REFRIGERANT SUCTION LINE
	ELBOW UP
	ELBOW DOWN
	90° ELBOW
	45° ELBOW
	TEE
	TEE DOWN
	TEE UP
	TOP BRANCH CONNECTION
	BOTTOM BRANCH CONNECTION
	FLANGE
	CAP
	CONTINUATION
	FLOOR DRAIN (REFER TO PLUMBING DRAWINGS)
	PIPE GUIDE
SUBSCRIPTS AND ABREVIATIONS	
AFF	ABOVE FINISHED FLOOR
BBS	BELOW BOTTOM OF STRUCTURE
BOD	BOTTOM OF DUCT
BOP	BOTTOM OF PIPE
CA	COMBUSTION AIR
CFM	CUBIC FEET PER MINUTE
EA	EXHAUST AIR
FPM	FEET PER MINUTE
NC	NORMALLY CLOSED
NO	NORMALLY OPEN
OA	OUTSIDE AIR
RA	RETURN AIR
SA	SUPPLY AIR
RENOVATIONS	
	POINT OF CONNECTION FROM NEW TO EXISTING
	ITEM TO REMAIN
	ITEM TO BE REMOVED

MS03



MECHANICAL KEYED NOTES

1. BALANCING VALVE TO BE PROVIDED WITH INFINITE POSITION CRANK OR MEMORY STOP FOR BALANCING SERVICE.
2. INSTALL NEW CHILLER ON EXISTING CONCRETE HOUSEKEEPING PAD.
3. PROVIDE ALL OUTDOOR PIPING WITH INSULATION AND ALUMINUM JACKETING AS SPECIFIED.
4. PROVIDE INLINE STRAINER IN VERTICAL PIPE WITH 1" DRAIN LINE.
5. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.

3 CHILLED WATER PIPING DIAGRAM

SCALE: NO SCALE



NOTES: 1. SEE TEMPERATURE TEST WELL DETAIL FOR MOUNTING ARRANGEMENTS AND CLEARANCES
2. MOUNT TO BE READABLE FROM FLOOR AT 5'-6" EYE LEVEL (7'-0" MAX.)

2 THERMOMETER INSTALLATION

SCALE: NONE CP009



MECHANICAL KEYED NOTES

1. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.

1 TYPICAL PIPING AT INLET AND OUTLET OF CHILLER

SCALE: NONE

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
STATE OF TEXAS
05-16-2022

MECHANICAL DETAILS AND SCHEDULES - BINGMAN HEAD START

M2.1

ELECTRICAL KEYED NOTES

1. DISCONNECT & REMOVE EXISTING EQUIPMENT WITH ASSOCIATED DISCONNECT & CONDUCTORS ALL THE WAY BACK TO SOURCE. INTERCEPT & EXTEND EXISTING CONDUITS TO NEW EQUIPMENT POINT OF CONNECTION AS REQUIRED.
2. DISCONNECT ALL EQUIPMENT CONNECTIONS. KEEP EXISTING CONDUITS IN PLACE FOR CONNECTION OF NEW EQUIPMENT. FIELD VERIFY CIRCUIT(S) ORIGINATION(S).
3. KEEP EXISTING CONTROLS CONDUIT(S) IN PLACE & EXTEND TO NEW CHILLER AS REQUIRED.
4. REMOVE EXISTING DISCONNECT & RETURN TO OWNER. PROVIDE NEW WP PULL BOX PER NEC REQUIREMENTS IN THE SAME LOCATION OF REMOVED DISCONNECT.

DEMO SYMBOL LEGEND

RENOVATIONS	
———	EXISTING TO REMAIN EQUIPMENT
– – –	DISCONNECT & REMOVED EQUIPMENT



NORTH

1 **ELECTRICAL DEMOLITION FLOOR PLAN - BINGMAN HEAD START**
SCALE: 1/4" = 1'-0"

Project No:	2022-01678-00
Drawn By:	AH
Checked By:	JZ
Date:	05-16-2022
Revision Dates:	

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference

10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD
Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
STATE OF TEXAS
05-16-2022

ELECTRICAL DEMOLITION FLOOR PLAN - BINGMAN HEAD START

E0.1

SYMBOL SCHEDULE

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
LIGHTING (LETTER DENOTES TYPE – SEE LIGHT FIXTURE SCHEDULE)	
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED ON EMERGENCY CIRCUIT
	DOWNLIGHT FIXTURE
	DOWNLIGHT FIXTURE ON EMERGENCY CIRCUIT
	LIGHT FIXTURE – WALL MOUNTED
	LIGHT FIXTURE – WALL MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – CEILING MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – WALL MOUNTED ON EMERGENCY CIRCUIT
LIGHTING CONTROLS & DEVICES	
$	SINGLE POLE SWITCH
$3	3-WAY SWITCH
$4	4-WAY SWITCH
$K	KEYED SWITCH
$D	WALL BOX DIMMER, SIZE AND TYPE AS REQUIRED
$P	PILOT LIGHT SWITCH
$T	6-HOUR ROTARY TIMER SWITCH WITH NO HOLD U.N.O.
	PUSH BUTTON EPO SWITCH (KEY RESET) WITH COVER
$MC	MOMENTARY CONTACT SWITCH
$R	LOW VOLTAGE DIGITAL KEYPAD
$B	BUILDING MANAGEMENT (BMCS) LOCAL OVERRIDE SWITCH
	OCCUPANCY SENSOR (AUTO ON / AUTO OFF WITHIN 20-MINUTES)
	VACANCY SENSOR (MANUAL ON / AUTO OFF WITHIN 10-MINUTES)
	PHOTOCELL SENSOR
LCS#	LIGHTING CONTROL SYSTEM. ('#' DENOTES TYPE – SEE LIGHTING CONTROLS SCHEDULE)
LCR	UL924 EMERGENCY LOAD CONTROL RELAY UNLESS NOTED OTHERWISE.
RECEPTACLES AND OUTLETS	
	SIMPLEX RECEPTACLE
	DUPLEX RECEPTACLE
U	DUPLEX RECEPTACLE WITH TWO USB CHARGING PORTS.
	125/250 VOLT, 1 PHASE, 3-WIRE, 20 AMPS UNLESS NOTED OTHERWISE
	DOUBLE DUPLEX IN 2-GANG BOX WITH SINGLE COVER PLATE
U	DOUBLE DUPLEX WITH TWO USB CHARGING PORTS IN 2-GANG BOX WITH SINGLE COVER PLATE
	DOUBLE DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE IN 2-GANG BOX WITH SINGLE COVER PLATE
	DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE
	FLUSH FLOOR DUPLEX RECEPTACLE OUTLET
	FLUSH FLOOR DOUBLE DUPLEX RECEPTACLE OUTLET
D/A	CONCEALED SERVICE MULTI-ACCESS FLOOR BOX WITH DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
D/A	CONCEALED SERVICE MULTI-ACCESS FLOOR BOX WITH DOUBLE DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
	JUNCTION BOX
G	FLUSH REMOTE GFCI DEVICE (LOCATE IN READILY ACCESSIBLE LOCATION)
MOTOR CONTROLLERS AND EQUIPMENT	
	MOTOR, MAKE FINAL MOTOR CONNECTION
$	MOTOR-RATED SWITCH. 20A UNLESS INDICATED OTHERWISE.
J	INTEGRAL EQUIPMENT DISCONNECT
J	COMBINATION MOTOR STARTER/DISCONNECT SWITCH AS REQUIRED
	MOTOR STARTER
	PREWIRED DEVICE, MAKE ELECTRICAL FINAL CONNECTIONS
VFD	VARIABLE FREQUENCY DRIVE MOTOR CONTROLLER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
HF	HIGH EFFICIENCY HARMONIC FILTER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
T	LOW VOLTAGE TRANSFORMER, SIZE AND TYPE AS REQUIRED.
Y	CHIME/BUZZER
ELECTRICAL EQUIPMENT	
	ELECTRICAL PANELBOARD; REFER TO FLOOR PLANS FOR VOLTAGE.
	DRY TYPE TRANSFORMER
	PLYWOOD TELEPHONE BACKBOARD
CIRCUITING	
	CONDUIT
	CONDUIT BELOW FLOOR, SLAB, OR GRADE
#W	3/4"C. UNLESS OTHERWISE NOTED; LONG HATCH, NEUTRAL; SHORT HATCH, PHASE; LONG HATCH & HOOK, INSULATED GROUND. NO HATCHES INDICATES 2 CONDUCTORS. ARROW INDICATES HOMERUN.
	PARTIAL ELECTRICAL HOME RUN
SUBSCRIPTS AND ABBREVIATIONS	
WP	INDICATES "WEATHERPROOF"
H	INDICATES "HORIZONTAL"
NL	INDICATES "NIGHT LIGHT".
TP	INDICATES "TAMPER PROOF"
(KS)	INDICATES "KNEE SPACE". LOCATE WIRING DEVICE IN KNEESPACE
U.N.O.	INDICATES "UNLESS NOTED OTHERWISE"
(E)	INDICATES EXISTING TO REMAIN
(R)	INDICATES REPLACE DEVICE AND COVERPLATE.
•	NEXT TO ANY SYMBOL INDICATES FINAL ROUGH-IN FIELD COORDINATION BY CONTRACTOR WITH ARCHITECTURAL MILLWORK DRAWINGS AND OTHER TRADES

GENERAL NOTES:

-ALL EXTERIOR BUILDING ELECTRICAL EQUIPMENT TO BE WEATHERPROOF NEMA-3RX MINIMUM.
-ALL EXTERIOR RECEPTACLES SHALL BE WATER RESISTANT TYPE.

ELECTRICAL GENERAL NOTES:

1. ALL EMPTY CONDUIT SHALL HAVE PULL STRING.
2. EACH CONDUIT SHALL BE LIMITED TO (3) CIRCUITS MAXIMUM.
3. ALL EXISTING EQUIPMENT SHALL REMAIN OPERATIONAL.

SYMBOL LEGEND

RENOVATIONS	
	EXISTING TO REMAIN EQUIPMENT
	NEW

ELECTRICAL KEYED NOTES:

1. CONNECT NEW MECHANICAL EQUIPMENT USING NEW CONDUCTORS BACK IN EXISTING CONDUITS. SEE ONE LINE DIAGRAM. RECONNECT EQUIPMENT ELECTRODE CONDUCTOR. REPLACE ELECTRODE CONDUCTOR WITH NEW, USE #6 CU MINIMUM. PROVIDE GROUNDING ROD AS REQUIRED.
2. RECONNECT ALL EQUIPMENT RELATED CONNECTIONS VIA EXISTING CONDUITS. EXTEND EXISTING CONDUITS TO ACCOMMODATE NEW POINT OF CONNECTION AS REQUIRED. PROVIDE ADDITIONAL WP JUNCTION BOXES & CONDUITS AS NECESSARY.
3. PROVIDE ADDITIONAL WP JUNCTION BOXES & CONDUITS TO ACCOMMODATE NEW POINT OF EQUIPMENT CONTROLS CONNECTION AS REQUIRED.
4. PROVIDE 3/4"C WITH (2)#10 CU & (1) #10 CU GND TO PANEL. PROVIDE 30A/1P GFE 30mA BREAKER AT THE PANEL.



1 **ELECTRICAL FLOOR PLAN - BINGMAN HEAD START**
SCALE: 1/4" = 1'-0"

ELECTRICAL LOAD CALCULATION

NO LOAD CHANGE.

ELECTRICAL LOAD CALCULATION

CHILLER CHANGE OUT. NEW EQUIPMENT ELECTRICAL LOAD IS LESS THAN EXISTING.

NOTE: IF UNIT SELECTION REQUIRES DIFFERENT CIRCUIT BREAKER SIZE, ELECTRICAL CONTRACTOR SHALL PROVIDE A CIRCUIT BREAKER THAT MATCHES NEW EQUIPMENT REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER. COORDINATE WITH MECHANICAL CONTRACTOR.

2 **PARTIAL ONE LINE DIAGRAM**
SCALE: NONE

Project No: 2022-01678-00
Drawn By: AH
Checked By: JZ
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference.
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



ELECTRICAL FLOOR PLAN - BINGMAN HEAD START

E1.1

DEMOLITION GENERAL NOTES:

1. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FEILD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.
2. ALL MECHANICAL SYSTEMS SHOWN ON THIS PLAN ARE FROM EXISTING DRAWINGS AND PRELIMINARY FIELD WORK. CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL LOCATIONS AND SIZES OF MECHANICAL SYSTEMS PRIOR TO THE START OF WORK.
3. OWNER SHALL HAVE FIRST RIGHT OF REFUSAL ON ALL HVAC EQUIPMENT BEING REMOVED FROM THIS PROJECT. THIS INCLUDES BUT NOT LIMITED TO INTERNAL COMPONENTS OF CHILLERS, VALVES AND PIPE STANDS.

DEMOLITION KEYED NOTES:

1. REMOVE EXISTING CHW S/R PIPING AND ASSOCIATED VALVES UP TO POINT INDICATED.
2. EXISTING CHW S/R PIPING TO REMAIN.
3. EXISTING PUMP, CONCRETE PAD, AND ALL ASSOCIATED APPURTENANCES SHALL REMAIN.
4. EXISTING AIR COOLED CHILLER SHALL BE REMOVED. EXISTING CONCRETE PAD SHALL REMAIN.
5. EXISTING EXPANSION TANK, PIPING, AND ALL ASSOCIATED APPURTENANCES SHALL REMAIN.
6. EXISTING CHEMICAL FEEDER, PIPING, AND ALL ASSOCIATED APPURTENANCES SHALL REMAIN.
7. EXISTING AIR SEPARATOR, PIPING, AND ALL ASSOCIATED APPURTENANCES SHALL REMAIN.
8. EXISTING BOILER SHALL REMAIN.
9. EXISTING PIPING SUPPORTS SHALL REMAIN.
10. EXISTING STORAGE TANK SHALL REMAIN.

BMCS NOTE:
EXISTING CONTROL SYSTEM IS BY AUTOMATED LOGIC. REFER TO BMCS SPECIFICATION FOR MORE INFORMATION.

DEMO SYMBOL LEGEND

RENOVATIONS	
	ITEM TO REMAIN
	ITEM TO BE REMOVED

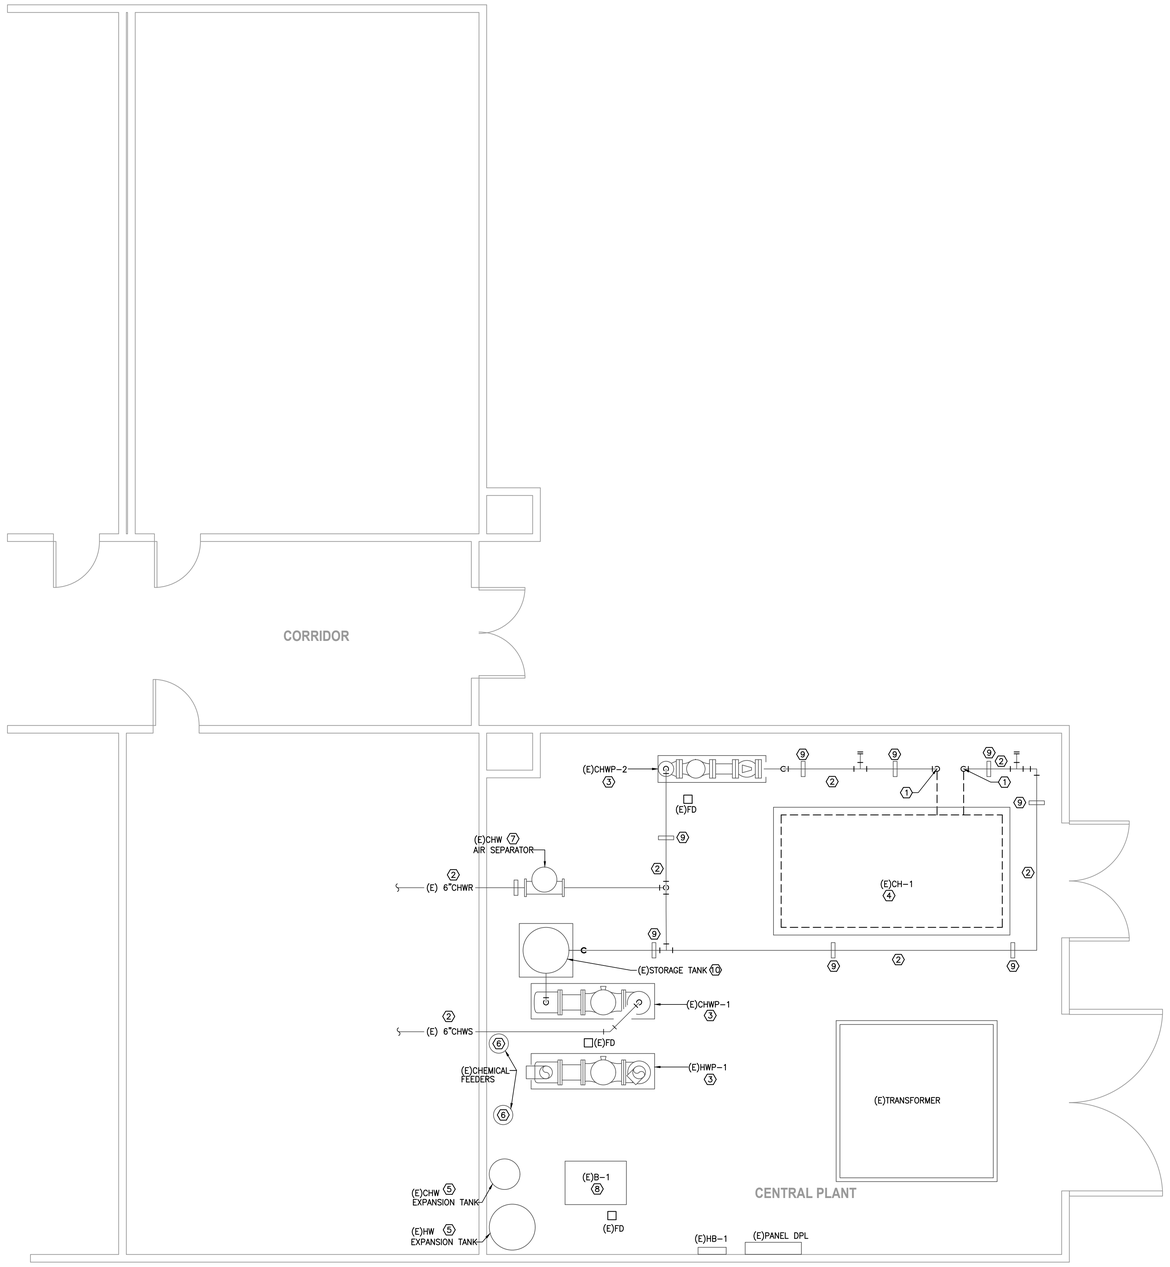

NORTH

1 **MECHANICAL DEMOLITION FLOOR PLAN - FLETCHER ES**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
05-16-2022

MECHANICAL DEMOLITION FLOOR PLAN - FLETCHER ES

M0.1

MECHANICAL GENERAL NOTES:

1. MECHANICAL CONTRACTOR SHALL COORDINATE WITH THE ELECTRICAL CONTRACTOR FOR ALL ELECTRICAL POWER REQUIREMENTS.
2. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FIELD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.

MECHANICAL KEYED NOTES:

1. PROVIDE OUTDOOR PIPING INSULATION AS SPECIFIED.
2. PROVIDE NEW CHW S/R PIPING AS SPECIFICED AND CONNECT TO EXISTING PIPING. RE:3/M2.1 FOR PARTIAL PIPING DIAGRAM.
3. VERIFY AIR-COOLED CHILLER SERVICE CLEARANCES WITH MANUFACTURER. COORDINATE WITH OTHER TRADES NOT TO OBSTRUCT.
4. INSTALL NEW CHILLER ON EXISTING CONCRETE PAD. EXTEND EXISTING CONCRETE PAD AS REQUIRED FOR NEW CHILLER.
5. POWER CONNECTION FOR NEW CHILLER SHALL BE AT THIS END, SAME LOCATION AS DEMOLISHED CHILLER.

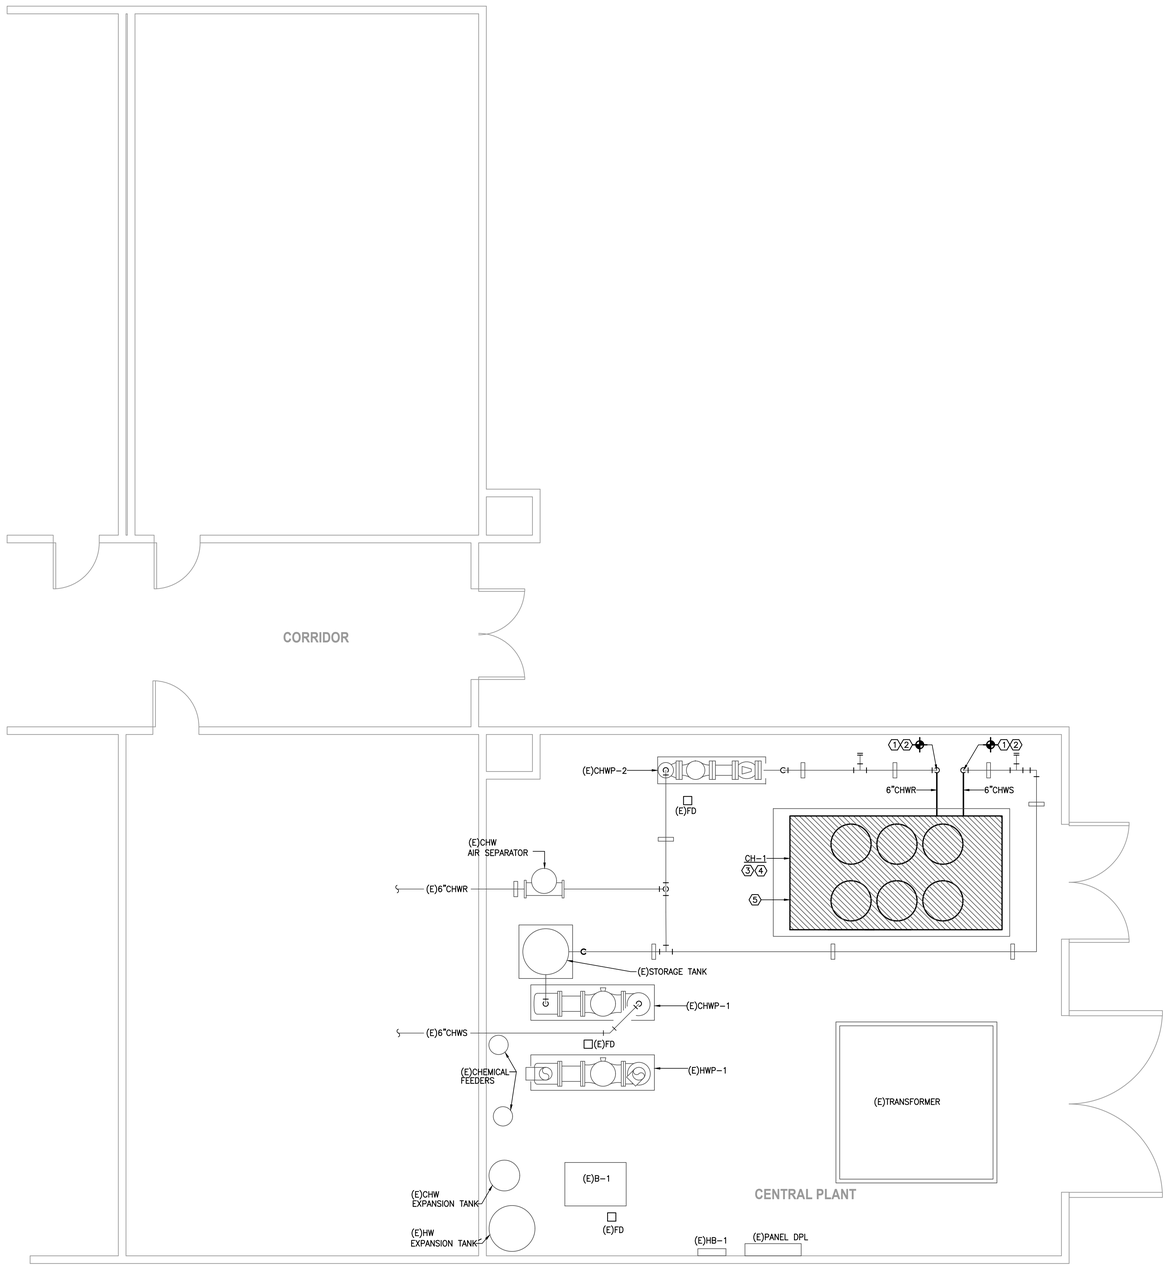

NORTH

1 **MECHANICAL FLOOR PLAN - FLETCHER ES**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT
BISD Preparing Our Next Generation

BRADLEY KALMANS 80219 LICENSED PROFESSIONAL ENGINEER
05-16-2022

MECHANICAL FLOOR PLAN - FLETCHER ES

M1.1

PACKAGED AIR COOLED SCROLL CHILLER

MARK	ACTUAL CAPACITY (TONS)	LEAVING WATER TEMP. (°F)	GPM	MAXIMUM WATER PRESSURE DROP (FT)	AMBIENT AIR TEMP. (°F)	CURRENT CHARACTERISTIC	REMARKS
CH-1	101	44	242.9	20.0	95.0	230/3/60	1,2,3

GENERAL NOTES:

1. MAXIMUM FOULING FACTOR FOR THE EVAPORATOR IS 0.0001
2. MAINTAIN MINIMUM CLEARANCES REQUIRED BY CHILLER MANUFACTURER FOR PROPER AIRFLOW TO FANS AND UNIT. MAINTAIN MINIMUM CLEARANCE AS REQUIRED TO OPEN ACCESS AND CONTROL DOORS ON EQUIPMENT FOR SERVICE, MAINTENANCE AND INSPECTION. MAINTAIN MIMMUM ELECTRICAL CLEARANCES AS REQUIRED BY NEC.
3. CHILLER SHALL MEET OR EXCEED THE AHRI FULL-LOAD AND PART-LOAD PATH A OR PATH B EFFICIENCIES INDICATED IN THE 2015 IECC.

REMARKS:

1. PROVIDE WITH LOW AMBIENT HEAD PRESSURE CONTROL.
2. PROVIDE WITH INTEGRAL MAIN ELECTRICAL DISCONNECT SWITCH.
3. PROVIDE WITH INSULATION ON ALL SUCTION LINES.

SYMBOL LEGEND

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
GENERAL	
(#)	KEY NOTE TAG
(#)	NOTE SPECIFIC TO DETAIL TAG
(A)	REVISION TAG
	NEW EQUIPMENT
PIPING	
—D—	CONDENSATE DRAIN LINE
—AD—	AUXILLARY CONDENSATE DRAIN LINE
—RLR—	REFRIGERANT LIQUID & GAS RECIRCULATION LINE (TOTAL OF TWO PIPES, ONLY ONE PIPE SHOWN FOR DRAWING CLARITY)
—RL—	REFRIGERANT LIQUID LINE
—HG—	REFRIGERANT HOT GAS LINE
—RS—	REFRIGERANT SUCTION LINE
	ELBOW UP
	ELBOW DOWN
	90° ELBOW
	45° ELBOW
	TEE
	TEE DOWN
	TEE UP
	TOP BRANCH CONNECTION
	BOTTOM BRANCH CONNECTION
	FLANGE
	CAP
	CONTINUATION
	FLOOR DRAIN (REFER TO PLUMBING DRAWINGS)
	PIPE GUIDE
SUBSCRIPTS AND ABREVIATIONS	
AFF	ABOVE FINISHED FLOOR
BBS	BELOW BOTTOM OF STRUCTURE
BOD	BOTTOM OF DUCT
BOP	BOTTOM OF PIPE
CA	COMBUSTION AIR
CFM	CUBIC FEET PER MINUTE
EA	EXHAUST AIR
FPM	FEET PER MINUTE
NC	NORMALLY CLOSED
NO	NORMALLY OPEN
OA	OUTSIDE AIR
RA	RETURN AIR
SA	SUPPLY AIR
RENOVATIONS	
	POINT OF CONNECTION FROM NEW TO EXISTING
	ITEM TO REMAIN
	ITEM TO BE REMOVED

MS03



MECHANICAL KEYED NOTES

1. BALANCING VALVE TO BE PROVIDED WITH INFINITE POSITION CRANK OR MEMORY STOP FOR BALANCING SERVICE.
2. INSTALL NEW CHILLER ON EXISTING CONCRETE HOUSEKEEPING PAD.
3. PROVIDE ALL OUTDOOR PIPING WITH INSULATION AND ALUMINUM JACKETING AS SPECIFIED.
4. PROVIDE INLINE STRAINER IN VERTICAL PIPE WITH 1" DRAIN LINE.
5. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.

3 CHILLED WATER PIPING DIAGRAM

SCALE: NO SCALE



NOTES: 1. SEE TEMPERATURE TEST WELL DETAIL FOR MOUNTING ARRANGEMENTS AND CLEARANCES
2. MOUNT TO BE READABLE FROM FLOOR AT 5'-6" EYE LEVEL (7'-0" MAX.)

2 THERMOMETER INSTALLATION

SCALE: NONE CP009



MECHANICAL KEYED NOTES

1. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.

1 TYPICAL PIPING AT INLET AND OUTLET OF CHILLER

SCALE: NONE

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALASO'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



MECHANICAL DETAILS AND SCHEDULES - FLETCHER ES

M2.1

ELECTRICAL KEYED NOTES

1. DISCONNECT & REMOVE EXISTING EQUIPMENT WITH ASSOCIATED CONDUCTORS ALL THE WAY BACK TO SOURCE. KEEP EXISTING CONDUIT IN PLACE TO RUN NEW CONDUCTORS. EXTEND EXISTING CONDUITS TO NEW CHILLER INTEGRAL DISCONNECT LOCATION.
2. DISCONNECT ALL EQUIPMENT CONNECTIONS. KEEP EXISTING CONDUITS & CONDUCTORS IN PLACE FOR CONNECTION OF NEW EQUIPMENT. FIELD VERIFY CIRCUIT(S) ORIGINATION(S).
3. KEEP EXISTING CONTROLS CONDUITS IN PLACE & EXTEND TO NEW CHILLER AS REQUIRED.

DEMO SYMBOL LEGEND	
RENOVATIONS	
	EXISTING TO REMAIN EQUIPMENT
– – –	DISCONNECT & REMOVED EQUIPMENT

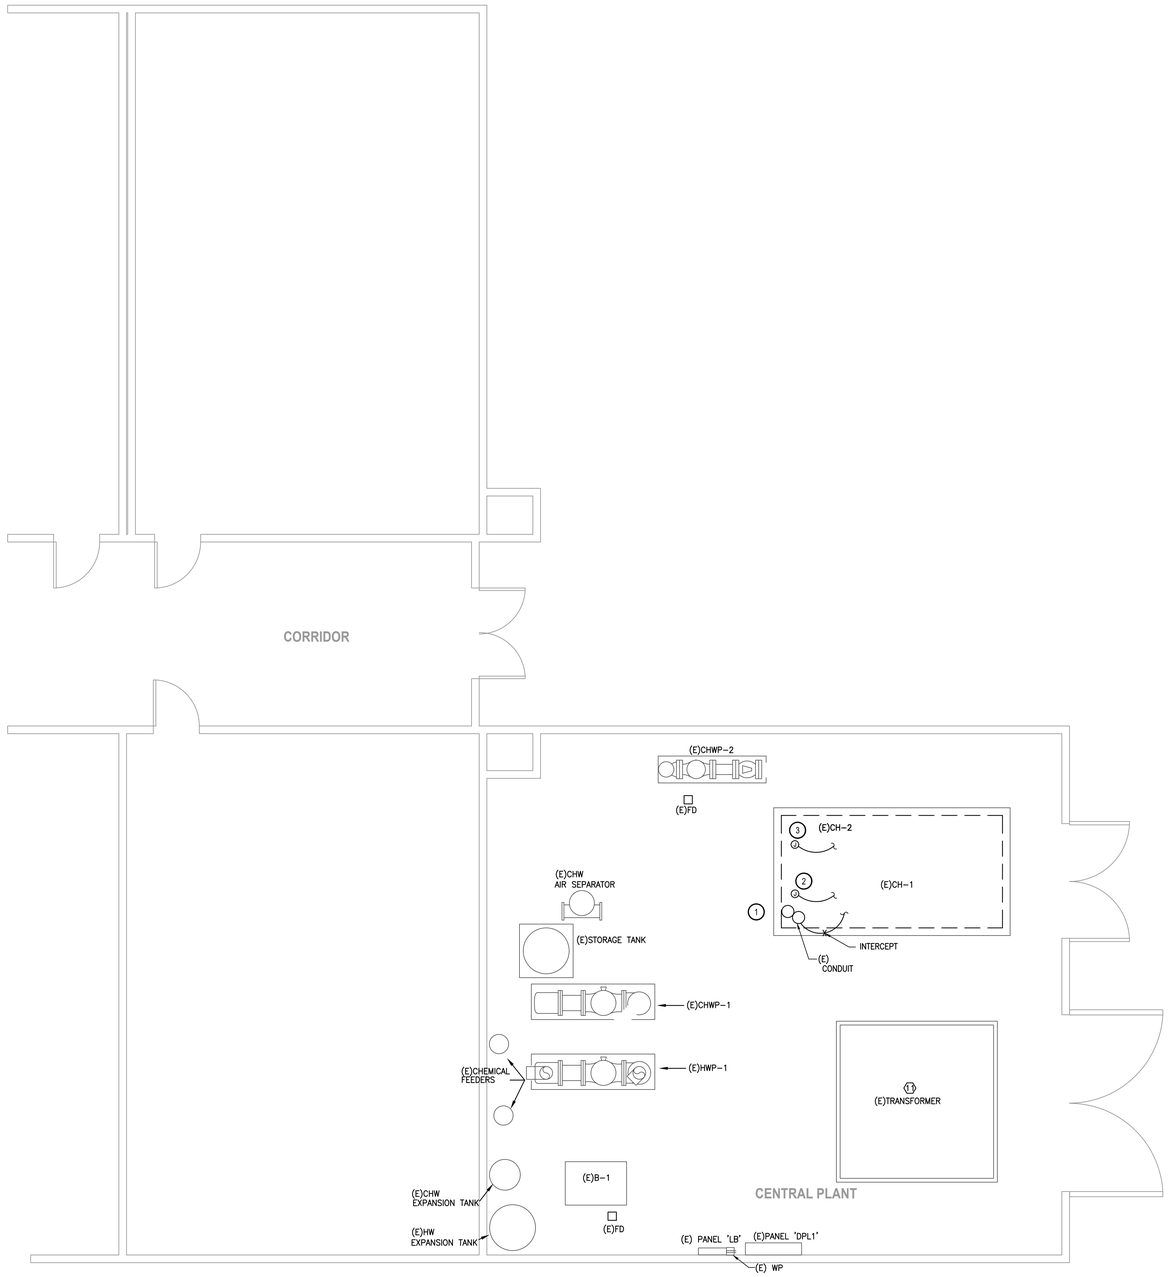

NORTH

1 **ELECTRICAL DEMOLITION FLOOR PLAN - FLETCHER ES**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: AH
Checked By: JZ
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT
BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
05-16-2022

ELECTRICAL DEMOLITION FLOOR PLAN - FLETCHER ES

E0.1

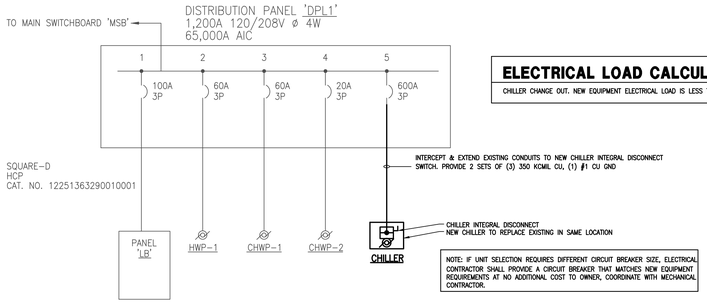

ELECTRICAL LOAD CALCULATION

CHILLER CHANGE OUT. NEW EQUIPMENT ELECTRICAL LOAD IS LESS THAN EXISTING.

2 ONE LINE DIAGRAM

SCALE: NONE

ELECTRICAL KEYED NOTES:

1. CONNECT NEW MECHANICAL EQUIPMENT USING NEW CONDUCTORS BACK IN EXISTING CONDUITS. SEE ONE LINE DIAGRAM. RECONNECT EQUIPMENT ELECTRODE CONDUCTOR. REPLACE ELECTRODE CONDUCTOR WITH NEW, USE #6 CU MINIMUM. PROVIDE GROUNDING RODS ARE REQUIRED.
2. RECONNECT ALL EQUIPMENT RELATED CONNECTIONS VIA EXISTING CONDUITS. EXTEND EXISTING CONDUITS TO ACCOMMODATE NEW POINT OF CONNECTION AS REQUIRED. PROVIDE ADDITIONAL WP JUNCTION BOXES & CONDUITS AS NECESSARY.
3. PROVIDE ADDITIONAL WP JUNCTION BOXES & CONDUITS TO ACCOMMODATE NEW POINT OF EQUIPMENT CONTROLS CONNECTION AS REQUIRED.
4. PROVIDE 3/4"C WITH (2)#10 CU & (1) #10 CU GND TO PANEL. PROVIDE 30A/1P GFIE 30mA BREAKER AT THE PANEL.

SYMBOL LEGEND

RENOVATIONS	
———	EXISTING TO REMAIN
———	NEW

SYMBOL SCHEDULE

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
LIGHTING (LETTER DENOTES TYPE – SEE LIGHT FIXTURE SCHEDULE)	
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED ON EMERGENCY CIRCUIT
	DOWNLIGHT FIXTURE
	DOWNLIGHT FIXTURE ON EMERGENCY CIRCUIT
	LIGHT FIXTURE – WALL MOUNTED
	LIGHT FIXTURE – WALL MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – CEILING MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – WALL MOUNTED ON EMERGENCY CIRCUIT
LIGHTING CONTROLS & DEVICES	
$	SINGLE POLE SWITCH
$3	3-WAY SWITCH
$4	4-WAY SWITCH
$K	KEYED SWITCH
$D	WALL BOX DIMMER, SIZE AND TYPE AS REQUIRED
$P	PILOT LIGHT SWITCH
$T	6-HOUR ROTARY TIMER SWITCH WITH NO HOLD U.N.O.
	PUSH BUTTON EPO SWITCH (KEY RESET) WITH COVER
$MC	MOMENTARY CONTACT SWITCH
$R	LOW VOLTAGE DIGITAL KEYPAD
$B	BUILDING MANAGEMENT (BMCS) LOCAL OVERRIDE SWITCH
	OCCUPANCY SENSOR (AUTO ON / AUTO OFF WITHIN 20-MINUTES)
	VACANCY SENSOR (MANUAL ON / AUTO OFF WITHIN 10-MINUTES)
	PHOTOCELL SENSOR
LCP	LIGHTING CONTROL SYSTEM. ('#' DENOTES TYPE – SEE LIGHTING CONTROLS SCHEDULE)
ERC	UL924 EMERGENCY LOAD CONTROL RELAY UNLESS NOTED OTHERWISE.
RECEPTACLES AND OUTLETS	
	SIMPLEX RECEPTACLE
	DUPLEX RECEPTACLE
U	DUPLEX RECEPTACLE WITH TWO USB CHARGING PORTS.
	125/250 VOLT, 1 PHASE, 3-WIRE, 20 AMPS UNLESS NOTED OTHERWISE
	DOUBLE DUPLEX IN 2-GANG BOX WITH SINGLE COVER PLATE
U	DOUBLE DUPLEX WITH TWO USB CHARGING PORTS IN 2-GANG BOX WITH SINGLE COVER PLATE
	DOUBLE DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE IN 2-GANG BOX WITH SINGLE COVER PLATE
	DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE
NL	FLUSH FLOOR DUPLEX RECEPTACLE OUTLET
	FLUSH FLOOR DOUBLE DUPLEX RECEPTACLE OUTLET
DATA	CONCEALED SERVICE MULTI-ACCESS FLOOR BOX WITH DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
DATA	CONCEALED SERVICE MULTI-ACCESS FLOOR BOX WITH DOUBLE DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
	JUNCTION BOX
GFCI	FLUSH REMOTE GFCI DEVICE (LOCATE IN READILY ACCESSIBLE LOCATION)
MOTOR CONTROLLERS AND EQUIPMENT	
	MOTOR, MAKE FINAL MOTOR CONNECTION
$	MOTOR-RATED SWITCH. 20A UNLESS INDICATED OTHERWISE.
	INTEGRAL EQUIPMENT DISCONNECT
	COMBINATION MOTOR STARTER/DISCONNECT SWITCH AS REQUIRED
	MOTOR STARTER
	PREWIRED DEVICE, MAKE ELECTRICAL FINAL CONNECTIONS
VFD	VARIABLE FREQUENCY DRIVE MOTOR CONTROLLER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
HF	HIGH EFFICIENCY HARMONIC FILTER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
T	LOW VOLTAGE TRANSFORMER, SIZE AND TYPE AS REQUIRED.
	CHIME/BUZZER
ELECTRICAL EQUIPMENT	
	ELECTRICAL PANELBOARD; REFER TO FLOOR PLANS FOR VOLTAGE.
	DRY TYPE TRANSFORMER
	PLYWOOD TELEPHONE BACKBOARD
CIRCUITING	
———	CONDUIT
———	CONDUIT BELOW FLOOR, SLAB, OR GRADE
	3/4"C. UNLESS OTHERWISE NOTED; LONG HATCH, NEUTRAL; SHORT HATCH, PHASE; LONG HATCH & HOOK, INSULATED GROUND. NO HATCHES INDICATES 2 CONDUCTORS. ARROW INDICATES HOMERUN.
	PARTIAL ELECTRICAL HOME RUN
SUBSCRIPTS AND ABBREVIATIONS	
WP	INDICATES 'WEATHERPROOF'
H	INDICATES 'HORIZONTAL'
NL	INDICATES 'NIGHT LIGHT'.
TP	INDICATES 'TAMPER PROOF'
(KS)	INDICATES 'KNEE SPACE'. LOCATE WIRING DEVICE IN KNEESPACE
U.N.O.	INDICATES 'UNLESS NOTED OTHERWISE'
(E)	INDICATES EXISTING TO REMAIN
(R)	INDICATES REPLACE DEVICE AND COVERPLATE.
•	NEXT TO ANY SYMBOL INDICATES FINAL ROUGH-IN FIELD COORDINATION BY CONTRACTOR WITH ARCHITECTURAL MILLWORK DRAWINGS AND OTHER TRADES

GENERAL NOTES:
-ALL EXTERIOR BUILDING ELECTRICAL EQUIPMENT TO BE WEATHERPROOF NEMA-3RX MINIMUM.
-ALL EXTERIOR RECEPTACLES SHALL BE WATER RESISTANT TYPE.

ELECTRICAL GENERAL NOTES:

1. ALL EMPTY CONDUIT SHALL HAVE PULL STRING.
2. EACH CONDUIT SHALL BE LIMITED TO (3) CIRCUITS MAXIMUM.
3. ALL EXISTING EQUIPMENT SHALL REMAIN OPERATIONAL.

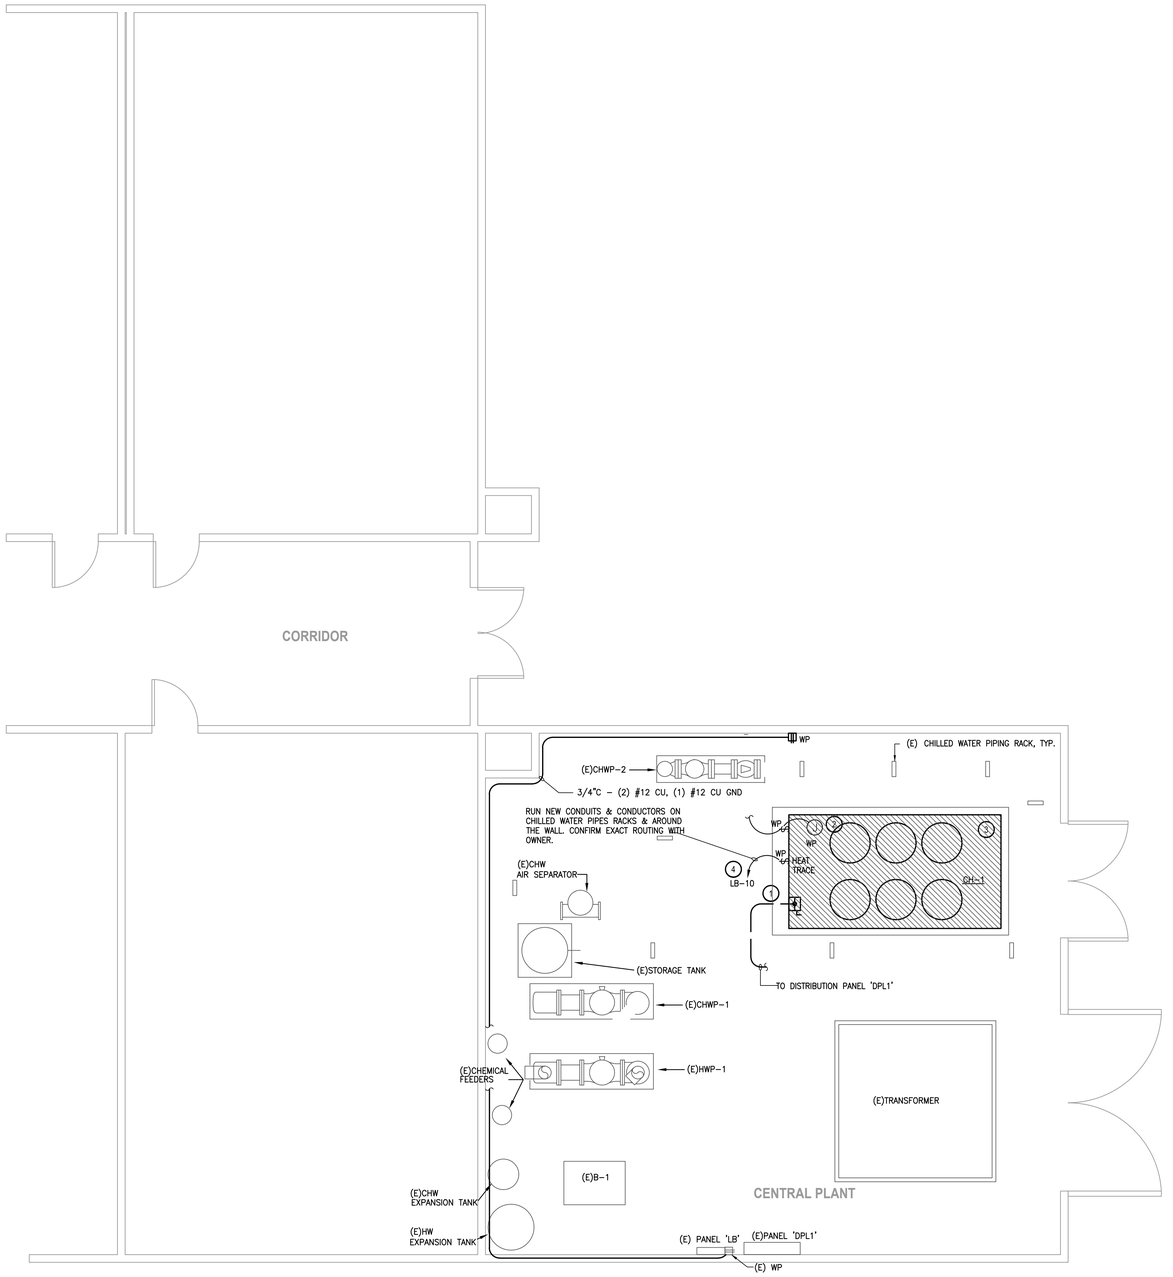

NORTH

1 ELECTRICAL FLOOR PLAN - FLETCHER ES

SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: AH
Checked By: JZ
Date: 05-16-2022
Revision Dates:

CONSULTANTS
MEP ENGINEERS
SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912
SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT
BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
05-16-2022

ELECTRICAL FLOOR PLAN - FLETCHER ES

E1.1

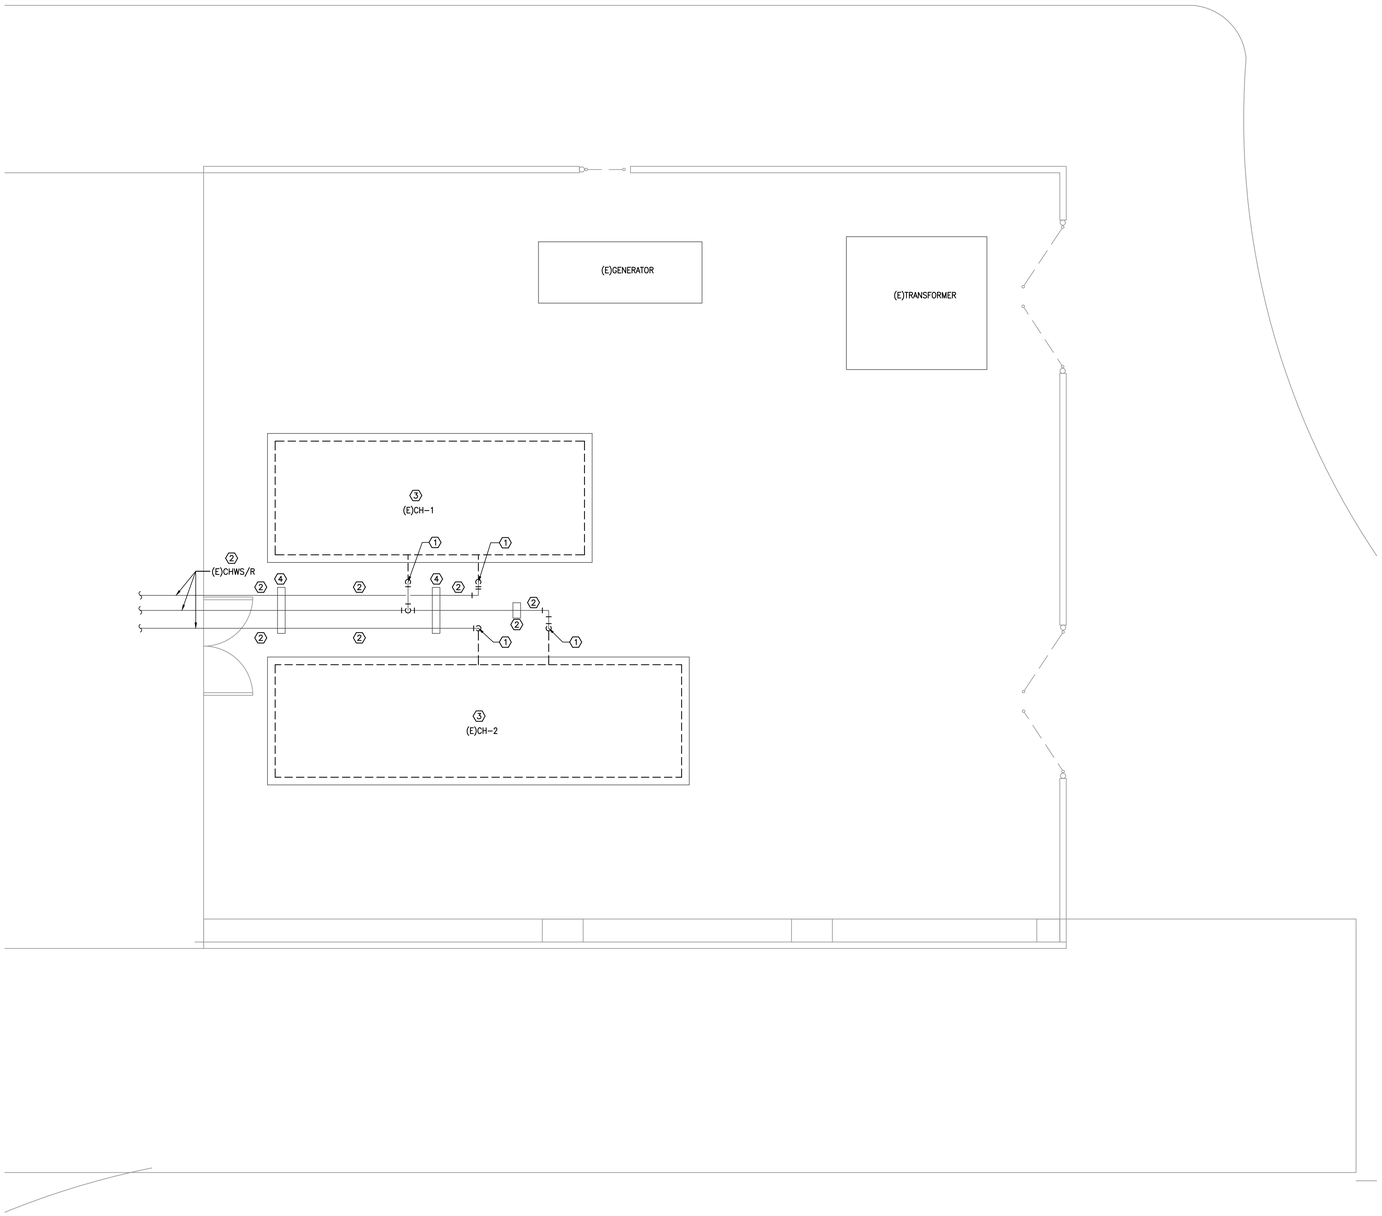

NORTH

1 **MECHANICAL DEMOLITION FLOOR PLAN - JONES CLARK ES**
SCALE: 1/4" = 1'-0"

DEMOLITION GENERAL NOTES:

1. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FEILD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.
2. ALL MECHANICAL SYSTEMS SHOWN ON THIS PLAN ARE FROM EXISTING DRAWINGS AND PRELIMINARY FIELD WORK. CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL LOCATIONS AND SIZES OF MECHANICAL SYSTEMS PRIOR TO THE START OF WORK.
3. OWNER SHALL HAVE FIRST RIGHT OF REFUSAL ON ALL HVAC EQUIPMENT BEING REMOVED FROM THIS PROJECT. THIS INCLUDES BUT NOT LIMITED TO INTERNAL COMPONENTS OF CHILERS, VALVES, AND PIPE STANDS.

DEMOLITION KEYED NOTES:

1. REMOVE EXISTING CHW S/R PIPING AND ASSOCIATED VALVES UP TO POINT INDICATED. CONTRACTOR SHALL VERIFY EXISTING PIPE SIZE BEFORE DEMOLISHING.
2. EXISTING CHW S/R PIPING TO REMAIN.
3. EXISTING AIR COOLED CHILLER SHALL BE REMOVED. EXISTING CONCRETE PAD SHALL REMAIN.
4. EXISTING PIPING SUPPORTS SHALL REMAIN.

BMCS NOTE:
EXISTING CONTROL SYSTEM IS BY AUTOMATED LOGIC. REFER TO BMCS SPECIFICATION FOR MORE INFORMATION.

DEMO SYMBOL LEGEND

RENOVATIONS	
	ITEM TO REMAIN
	ITEM TO BE REMOVED

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
05-16-2022

MECHANICAL DEMOLITION FLOOR PLAN - JONES CLARK ES

M0.1

MECHANICAL GENERAL NOTES:

1. MECHANICAL CONTRACTOR SHALL COORDINATE WITH THE ELECTRICAL CONTRACTOR FOR ALL ELECTRICAL POWER REQUIREMENTS.
2. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FIELD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.

MECHANICAL KEYED NOTES:

1. PROVIDE OUTDOOR PIPING INSULATION AS SPECIFIED.
2. PROVIDE NEW CHW S/R PIPING AS SPECIFICED AND CONNECT TO EXISTING PIPING. RE:3/M2.1 FOR PARTIAL PIPING DIAGRAM.
3. VERIFY AIR-COOLED CHILLER SERVICE CLEARANCES WITH MANUFACTURER. COORDINATE WITH OTHER TRADES NOT TO OBSTRUCT.
4. INSTALL NEW CHILLER ON EXISTING CONCRETE PAD. EXTEND EXISTING CONCRETE PAD AS REQUIRED TO ACCOMMODATE NEW CHILLER.
5. POWER CONNECTION FOR NEW CHILLER SHALL BE AT THIS END, SAME LOCATION AS DEMOLISHED CHILLER. MAINTAIN A MINIMUM OF 4'-0" IN FRONT OF CONTROL PANEL.
6. POWER CONNECTION FOR NEW CHILLER SHALL BE AT THIS END. MAINTAIN A MINIMUM OF 4'-0" IN FRONT OF CONTROL PANEL.

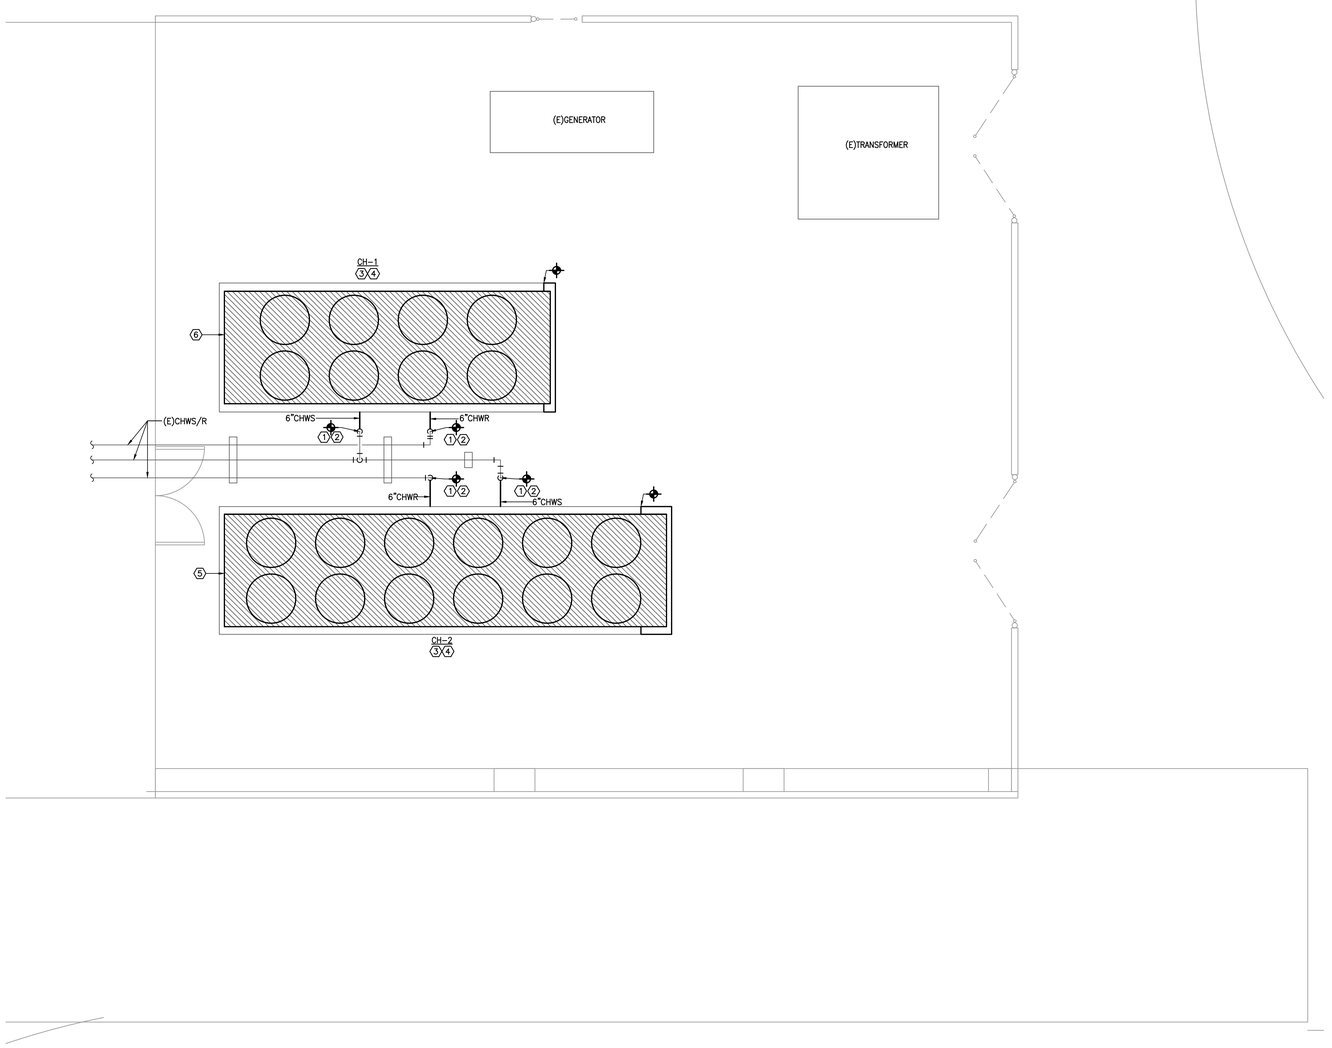

NORTH

1 **MECHANICAL FLOOR PLAN - JONES CLARK ES**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



MECHANICAL FLOOR PLAN - JONES CLARK ES

M1.1

PACKAGED AIR COOLED SCREW CHILLER

MARK	ACTUAL CAPACITY (TONS)	LEAVING WATER TEMP. (°F)	GPM	MAXIMUM WATER PRESSURE DROP (FT)	AMBIENT AIR TEMP. (°F)	CURRENT CHARACTERISTIC	REMARKS
CH-1	195	44	462.5	20.0	95.0	460/3/60	1,2,3
CH-2	286	44	668.8	20.0	95.0	460/3/60	1,2,3,4

GENERAL NOTES:

1. MAXIMUM FOULING FACTOR FOR THE EVAPORATOR IS 0.0001
2. MAINTAIN MINIMUM CLEARANCES REQUIRED BY CHILLER MANUFACTURER FOR PROPER AIRFLOW TO FANS AND UNIT. MANTAIN MINIMUM CLEARANCE AS REQUIRED TO OPEN ACCESS AND CONTROL DOORS ON EQUIPMENT FOR SERVICE, MAINTENANCE AND INSPECTION. MAINTAIN MINIMUM ELECTRICAL CLEARANCES AS REQUIRED BY NEC.
3. CHILLER SHALL MEET OR EXCEED THE AHRI FULL-LOAD AND PART-LOAD PATH A OR PATH B EFFICIENCIES INDICATED IN THE 2015 IECC.

REMARKS:

1. PROVIDE WITH LOW AMBIENT HEAD PRESSURE CONTROL.
2. PROVIDE WITH INTEGRAL MAIN ELECTRICAL DISCONNECTT SWITCH.
3. PROVIDE WITH INSULATION ON ALL SUCTION LINES.
4. NEW CHILLER SHALL HAVE A MAX LENGTH OF 346" (28'-10").

SYMBOL LEGEND

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
GENERAL	
(#)	KEY NOTE TAG
(#)	NOTE SPECIFIC TO DETAIL TAG
(#)	REVISION TAG
	NEW EQUIPMENT
PIPING	
—D—	CONDENSATE DRAIN LINE
—AD—	AUXILLARY CONDENSATE DRAIN LINE
—RLR—	REFRIGERANT LIQUID & GAS RECIRCULATION LINE (TOTAL OF TWO PIPES, ONLY ONE PIPE SHOWN FOR DRAWING CLARITY)
—RL—	REFRIGERANT LIQUID LINE
—HG—	REFRIGERANT HOT GAS LINE
—RS—	REFRIGERANT SUCTION LINE
	ELBOW UP
	ELBOW DOWN
	90° ELBOW
	45° ELBOW
	TEE
	TEE DOWN
	TEE UP
	TOP BRANCH CONNECTION
	BOTTOM BRANCH CONNECTION
	FLANGE
	CAP
	CONTINUATION
	FLOOR DRAIN (REFER TO PLUMBING DRAWINGS)
	PIPE GUIDE
SUBSCRIPTS AND ABREVIATIONS	
AFF	ABOVE FINISHED FLOOR
BBS	BELOW BOTTOM OF STRUCTURE
BOD	BOTTOM OF DUCT
BOP	BOTTOM OF PIPE
CA	COMBUSTION AIR
CFM	CUBIC FEET PER MINUTE
EA	EXHAUST AIR
FPM	FEET PER MINUTE
NC	NORMALLY CLOSED
NO	NORMALLY OPEN
OA	OUTSIDE AIR
RA	RETURN AIR
SA	SUPPLY AIR
RENOVATIONS	
	POINT OF CONNECTION FROM NEW TO EXISTING
	ITEM TO REMAIN
	ITEM TO BE REMOVED

MS03



MECHANICAL KEYED NOTES

1. CONTRACTOR SHALL FIELD VERIFY EXISTING PIPE SIZES.
2. INSTALL NEW CHILLER ON EXISTING CONCRETE HOUSEKEEPING PAD. EXTEND EXISTING HOUSEKEEPING PAD AS REQUIRED TO ACCOMMODATE NEW CHILLER.
3. PROVIDE ALL OUTDOOR PIPING WITH INSULATION AND ALUMINUM JACKETING AS SPECIFIED.
4. PROVIDE INLINE STRAINER IN VERTICAL PIPE WITH 1" DRAIN LINE.
5. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.
6. BALANCING VALVE TO BE PROVIDED WITH INFINITE POSITION CRANK OR MEMORY STOP FOR BALANCING SERVICE.

3 CHILLED WATER PIPING DIAGRAM

SCALE: NO SCALE



NOTES: 1. SEE TEMPERATURE TEST WELL DETAIL FOR MOUNTING ARRANGEMENTS AND CLEARANCES
2. MOUNT TO BE READABLE FROM FLOOR AT 5'-6" EYE LEVEL (7'-0" MAX.)

2 THERMOMETER INSTALLATION

SCALE: NONE CP009



MECHANICAL KEYED NOTES

1. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.

1 TYPICAL PIPING AT INLET AND OUTLET OF CHILLER

SCALE: NONE

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
STATE OF TEXAS
05-16-2022

MECHANICAL DETAILS AND SCHEDULES - JONES CLARK ES

M2.1

SYMBOL SCHEDULE

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
LIGHTING (LETTER DENOTES TYPE – SEE LIGHT FIXTURE SCHEDULE)	
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED ON EMERGENCY CIRCUIT
	DOWNLIGHT FIXTURE
	DOWNLIGHT FIXTURE ON EMERGENCY CIRCUIT
	LIGHT FIXTURE – WALL MOUNTED
	LIGHT FIXTURE – WALL MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – CEILING MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – WALL MOUNTED ON EMERGENCY CIRCUIT
LIGHTING CONTROLS & DEVICES	
$	SINGLE POLE SWITCH
$3	3–WAY SWITCH
$4	4–WAY SWITCH
$K	KEYED SWITCH
$D	WALL BOX DIMMER, SIZE AND TYPE AS REQUIRED
$P	PILOT LIGHT SWITCH
$T	6–HOUR ROTARY TIMER SWITCH WITH NO HOLD U.N.O.
	PUSH BUTTON EPO SWITCH (KEY RESET) WITH COVER
$MC	MOMENTARY CONTACT SWITCH
$R	LOW VOLTAGE DIGITAL KEYPAD
$B	BUILDING MANAGEMENT (BMCS) LOCAL OVERRIDE SWITCH
	OCCUPANCY SENSOR (AUTO ON / AUTO OFF WITHIN 20–MINUTES)
	VACANCY SENSOR (MANUAL ON / AUTO OFF WITHIN 10–MINUTES)
	PHOTOCELL SENSOR
[#]	LIGHTING CONTROL SYSTEM. ('#' DENOTES TYPE – SEE LIGHTING CONTROLS SCHEDULE)
[EX]	UL924 EMERGENCY LOAD CONTROL RELAY UNLESS NOTED OTHERWISE.
RECEPTACLES AND OUTLETS	
	SIMPLEX RECEPTACLE
	DUPLEX RECEPTACLE
U	DUPLEX RECEPTACLE WITH TWO USB CHARGING PORTS.
	125/250 VOLT, 1 PHASE, 3–WIRE, 20 AMPS UNLESS NOTED OTHERWISE
	DOUBLE DUPLEX IN 2–GANG BOX WITH SINGLE COVER PLATE
U	DOUBLE DUPLEX WITH TWO USB CHARGING PORTS IN 2–GANG BOX WITH SINGLE COVER PLATE
	DOUBLE DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE IN 2–GANG BOX WITH SINGLE COVER PLATE
	DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE
	FLUSH FLOOR DUPLEX RECEPTACLE OUTLET
	FLUSH FLOOR DOUBLE DUPLEX RECEPTACLE OUTLET
	CONCEALED SERVICE MULTI–ACCESS FLOOR BOX WITH DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
	CONCEALED SERVICE MULTI–ACCESS FLOOR BOX WITH DOUBLE DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
	JUNCTION BOX
G	FLUSH REMOTE GFCI DEVICE (LOCATE IN READILY ACCESSIBLE LOCATION)
MOTOR CONTROLLERS AND EQUIPMENT	
	MOTOR, MAKE FINAL MOTOR CONNECTION
$	MOTOR–RATED SWITCH. 20A UNLESS INDICATED OTHERWISE.
	INTEGRAL EQUIPMENT DISCONNECT
	COMBINATION MOTOR STARTER/DISCONNECT SWITCH AS REQUIRED
	MOTOR STARTER
	PREWIRED DEVICE, MAKE ELECTRICAL FINAL CONNECTIONS
VFD	VARIABLE FREQUENCY DRIVE MOTOR CONTROLLER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
HF	HIGH EFFICIENCY HARMONIC FILTER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
T	LOW VOLTAGE TRANSFORMER, SIZE AND TYPE AS REQUIRED.
	CHIME/BUZZER
ELECTRICAL EQUIPMENT	
	ELECTRICAL PANELBOARD; REFER TO FLOOR PLANS FOR VOLTAGE.
	DRY TYPE TRANSFORMER
	PLYWOOD TELEPHONE BACKBOARD
CIRCUITING	
	CONDUIT
	CONDUIT BELOW FLOOR, SLAB, OR GRADE
	3/4"C. UNLESS OTHERWISE NOTED; LONG HATCH, NEUTRAL; SHORT HATCH, PHASE; LONG HATCH & HOOK, INSULATED GROUND. NO HATCHES INDICATES 2 CONDUCTORS. ARROW INDICATES HOMERUN.
	PARTIAL ELECTRICAL HOME RUN
SUBSCRIPTS AND ABBREVIATIONS	
WP	INDICATES 'WEATHERPROOF'
H	INDICATES 'HORIZONTAL'
NL	INDICATES 'NIGHT LIGHT'.
TP	INDICATES 'TAMPER PROOF'
(KS)	INDICATES 'KNEE SPACE'. LOCATE WIRING DEVICE IN KNEESPACE
U.N.O.	INDICATES 'UNLESS NOTED OTHERWISE'
(E)	INDICATES EXISTING TO REMAIN
(R)	INDICATES REPLACE DEVICE AND COVERPLATE.
•	NEXT TO ANY SYMBOL INDICATES FINAL ROUGH–IN FIELD COORDINATION BY CONTRACTOR WITH ARCHITECTURAL MILLWORK DRAWINGS AND OTHER TRADES

GENERAL NOTES:
–ALL EXTERIOR BUILDING ELECTRICAL EQUIPMENT TO BE WEATHERPROOF NEMA–3RX MINIMUM.
–ALL EXTERIOR RECEPTACLES SHALL BE WATER RESISTANT TYPE.

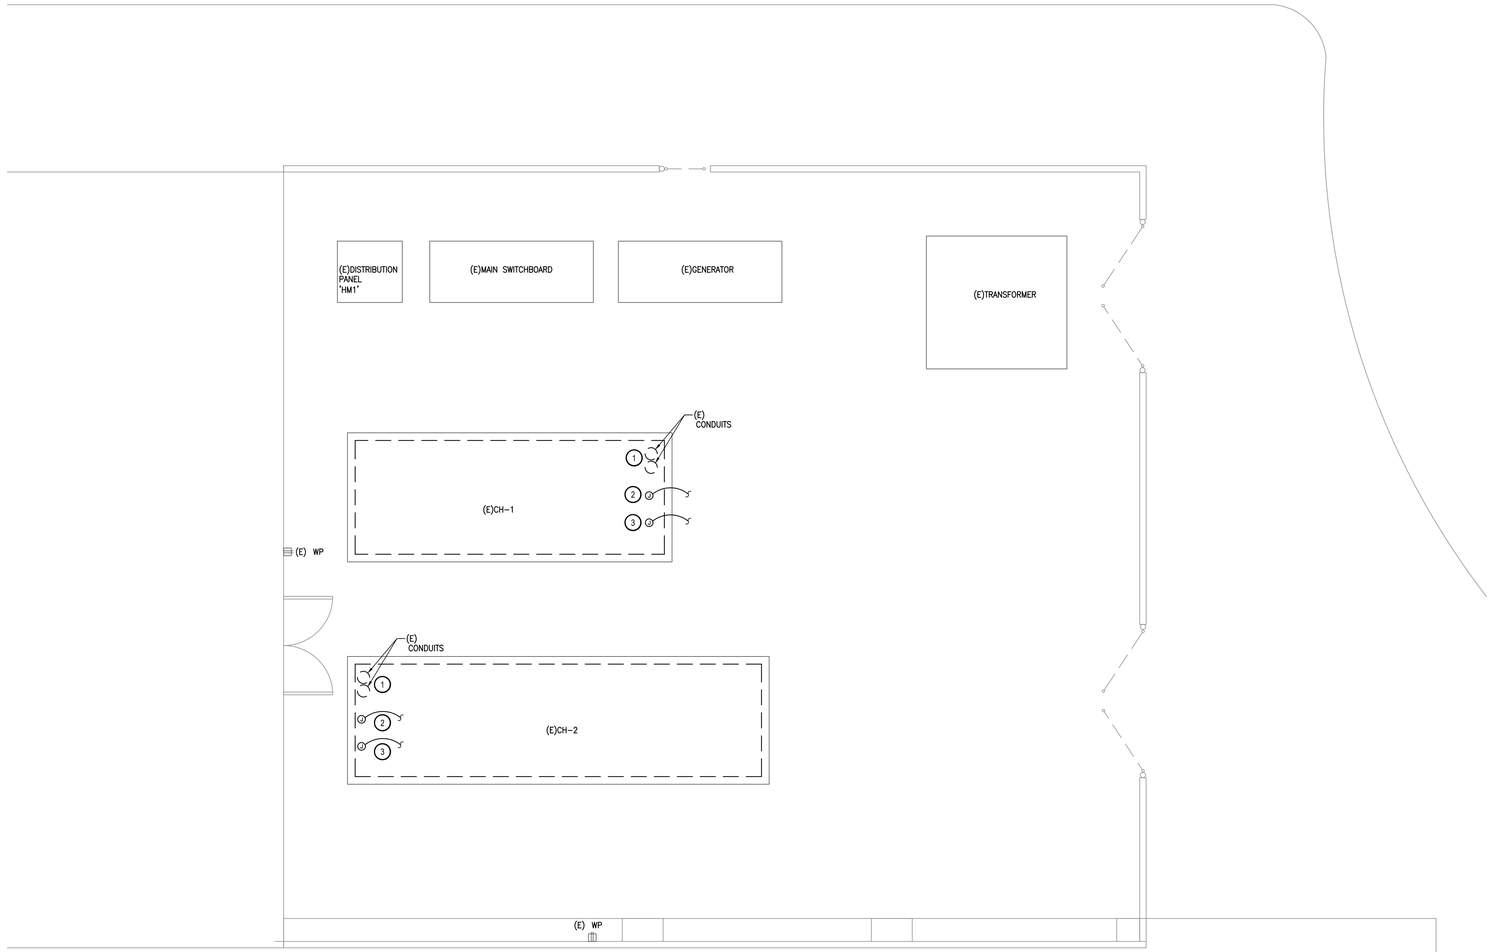

NORTH

1 **ELECTRICAL DEMOLITION FLOOR PLAN - JONES CLARK ES**
SCALE: 1/4" = 1'-0"

ELECTRICAL KEYED NOTES

1. DISCONNECT & REMOVE EXISTING EQUIPMENT WITH ASSOCIATED DISCONNECT & CONDUCTORS ALL THE WAY BACK TO SOURCE. SAW CUT ABANDONED EXPOSED CONDUITS TO FLUSH MOUNT THE GROUND LEVEL. ABANDON UNDERGROUND CONDUITS IN PLACE & PROVIDE COVER.
2. DISCONNECT ALL EQUIPMENT CONNECTIONS. KEEP EXISTING CONDUITS IN PLACE FOR CONNECTION OF NEW EQUIPMENT. FIELD VERIFY CIRCUIT(S) ORIGINATION(S).
3. KEEP EXISTING CONTROLS CONDUITS IN PLACE & EXTEND TO NEW CHILLER AS REQUIRED.

DEMO SYMBOL LEGEND

RENOVATIONS	
	EXISTING TO REMAIN EQUIPMENT
– – – –	DISCONNECT & REMOVED EQUIPMENT

Project No: 2022-01678-00
Drawn By: AH
Checked By: JZ
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference.
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT
BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
05-16-2022

ELECTRICAL DEMOLITION FLOOR PLAN - JONES CLARK ES

E0.1

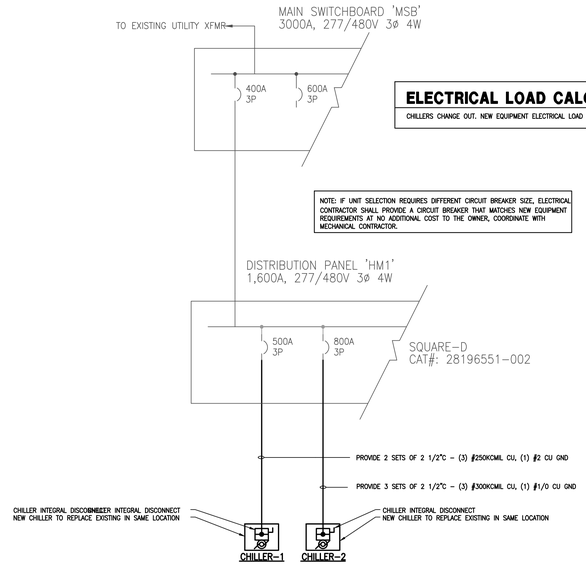

ELECTRICAL LOAD CALCULATION

CHILLERS CHANGE OUT. NEW EQUIPMENT ELECTRICAL LOAD IS LESS THAN EXISTING.

NOTE: IF UNIT SELECTION REQUIRES DIFFERENT CIRCUIT BREAKER SIZE, ELECTRICAL CONTRACTOR SHALL PROVIDE A CIRCUIT BREAKER THAT MATCHES NEW EQUIPMENT REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER, COORDINATE WITH MECHANICAL CONTRACTOR.

2 PARTIAL ONE-LINE DIAGRAM

SCALE: NONE

SYMBOL LEGEND

RENOVATIONS	
	EXISTING TO REMAIN
	NEW

ELECTRICAL KEYED NOTES:

1. CONNECT NEW MECHANICAL EQUIPMENT USING NEW CONDUITS & CONDUCTORS. SEE ONE LINE DIAGRAM. RECONNECT EQUIPMENT GROUND. REPLACE GROUNDING CONDUCTOR WITH NEW. USE #6 CU MINIMUM. PROVIDE GROUNDING RODS AS REQUIRED.
2. RECONNECT ALL EQUIPMENT RELATED CONNECTIONS VIA EXISTING CONDUITS. EXTEND EXISTING CONDUITS & CONDUCTORS TO ACCOMMODATE NEW POINT OF CONNECTION AS REQUIRED. PROVIDE ADDITIONAL WP JUNCTION BOXES & CONDUITS AS NECESSARY.
3. PROVIDE ADDITIONAL WP JUNCTION BOXES & CONDUITS TO ACCOMMODATE NEW POINT OF EQUIPMENT CONTROLS CONNECTION AS REQUIRED.
4. PROVIDE 3/4"C WITH (2)#10 CU & (1) #10 CU GND TO NEAREST 120/208V PANEL WITH AVAILABLE SPACES/SPARES. PROVIDE 30A/1P GFIE 30mA BREAKER AT THE PANEL. FIELD VERIFY PANEL LOCATION.

ELECTRICAL GENERAL NOTES:

1. ALL EMPTY CONDUIT SHALL HAVE PULL STRING.
2. EACH CONDUIT SHALL BE LIMITED TO (3) CIRCUITS MAXIMUM.
3. ALL EXISTING EQUIPMENT SHALL REMAIN OPERATIONAL.

Project No:	2022-01678-00
Drawn By:	AH
Checked By:	JZ
Date:	05-16-2022
Revision Dates:	

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALASO'BRIEN | expect a difference.
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

(E) 120/208V PANEL WITH AVAILABLE SPACES/SPARES. FIELD VERIFY EXACT LOCATION

NORTH

1 ELECTRICAL FLOOR PLAN - JONES CLARK ES

SCALE: 1/4" = 1'-0"

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



ELECTRICAL FLOOR PLAN - JONES CLARK ES

E1.1

DEMOLITION GENERAL NOTES:

1. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FEILD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.
2. ALL MECHANICAL SYSTEMS SHOWN ON THIS PLAN ARE FROM EXISTING DRAWINGS AND PRELIMINARY FIELD WORK. CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL LOCATIONS AND SIZES OF MECHANICAL SYSTEMS PRIOR TO THE START OF WORK.
3. OWNER SHALL HAVE FIRST RIGHT OF REFUSAL ON ALL HVAC EQUIPMENT BEING REMOVED FROM THIS PROJECT. THIS INCLUDES BUT NOT LIMITED TO INTERNAL COMPONENTS OF CHILLERS, VALVES, AND PIPE STANDS.

DEMOLITION KEYED NOTES:

1. REMOVE EXISTING CHW S/R PIPING AND ASSOCIATED VALVES UP TO POINT INDICATED. CONTRACTOR SHALL VERIFY EXISTING PIPE SIZE BEFORE DEMOLISHING.
2. EXISTING CHW S/R PIPING TO REMAIN.
3. EXISTING AIR COOLED CHILLER SHALL BE REMOVED.
4. EXISTING PIPING SUPPORTS SHALL REMAIN.

BMCS NOTE:
EXISTING CONTROL SYSTEM IS BY AUTOMATED LOGIC. REFER TO BMCS SPECIFICATION FOR MORE INFORMATION.

DEMO SYMBOL LEGEND

RENOVATIONS	
	ITEM TO REMAIN
	ITEM TO BE REMOVED

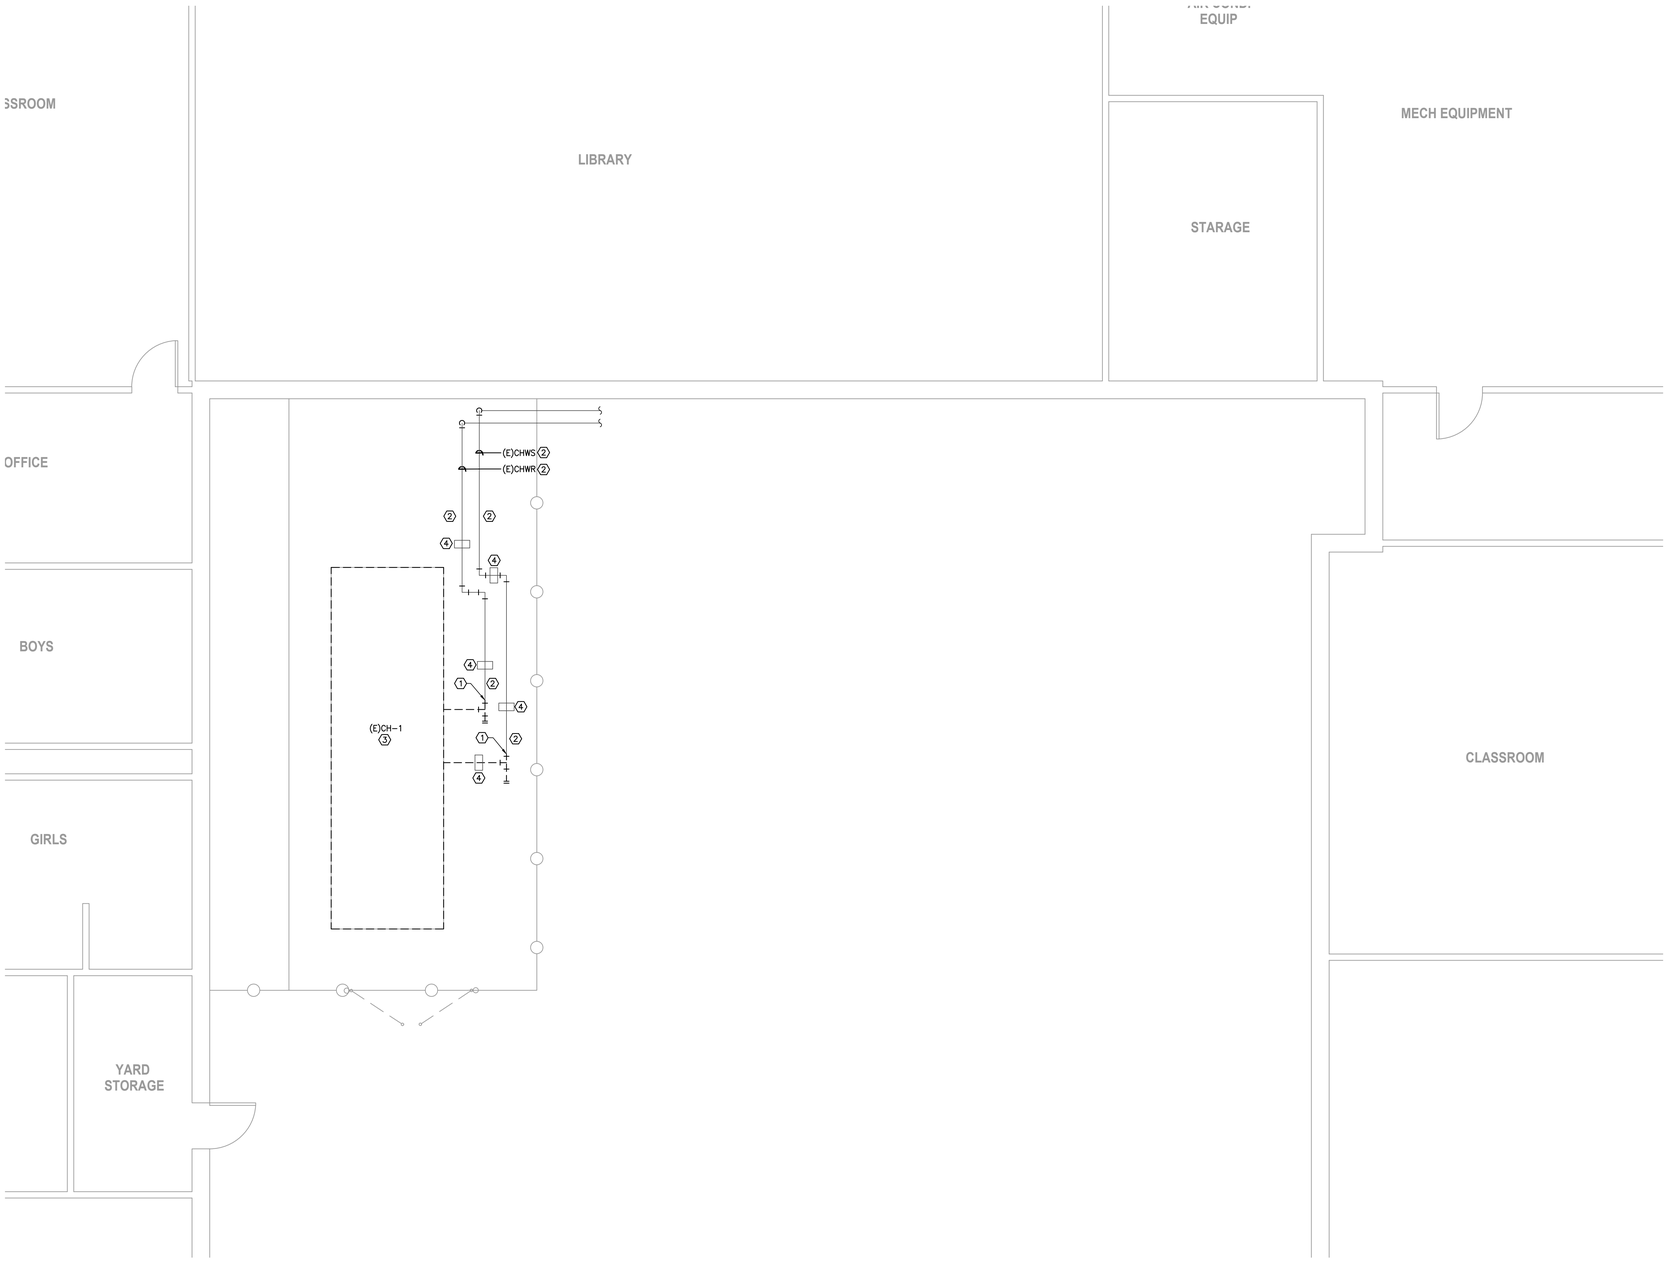

NORTH

1 **MECHANICAL DEMOLITION FLOOR PLAN - MARSHALL MS**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912
SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT
BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
STATE OF TEXAS
05-16-2022

MECHANICAL DEMOLITION FLOOR PLAN - MARSHALL MS

M0.1

MECHANICAL GENERAL NOTES:

1. MECHANICAL CONTRACTOR SHALL COORDINATE WITH THE ELECTRICAL CONTRACTOR FOR ALL ELECTRICAL POWER REQUIREMENTS.
2. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FIELD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.

MECHANICAL KEYED NOTES:

① PROVIDE OUTDOOR PIPING INSULATION AS SPECIFIED.

② PROVIDE NEW CHW S/R PIPING AS SPECIFICED AND CONNECT TO EXISTING PIPING. RE:3/M2.1 FOR PARTIAL PIPING DIAGRAM.

③ VERIFY AIR-COOLED CHILLER SERVICE CLEARANCES WITH MANUFACTURER. COORDINATE WITH OTHER TRADES NOT TO OBSTRUCT.

④ PROVIDE 12"X 12" CONCRETE RUNNERS TO SPAN LENGTH OF AIR-COOLED CHILLER (TYPICAL OF 2 RUNNERS PER CHILLER). REFER TO DETAIL 3/M2.1 FOR ADDITIONAL INFORMATION.

⑤ POWER CONNECTION FOR NEW CHILLER SHALL BE AT THIS END, SAME LOCATION AS DEMOLISHED CHILLER.

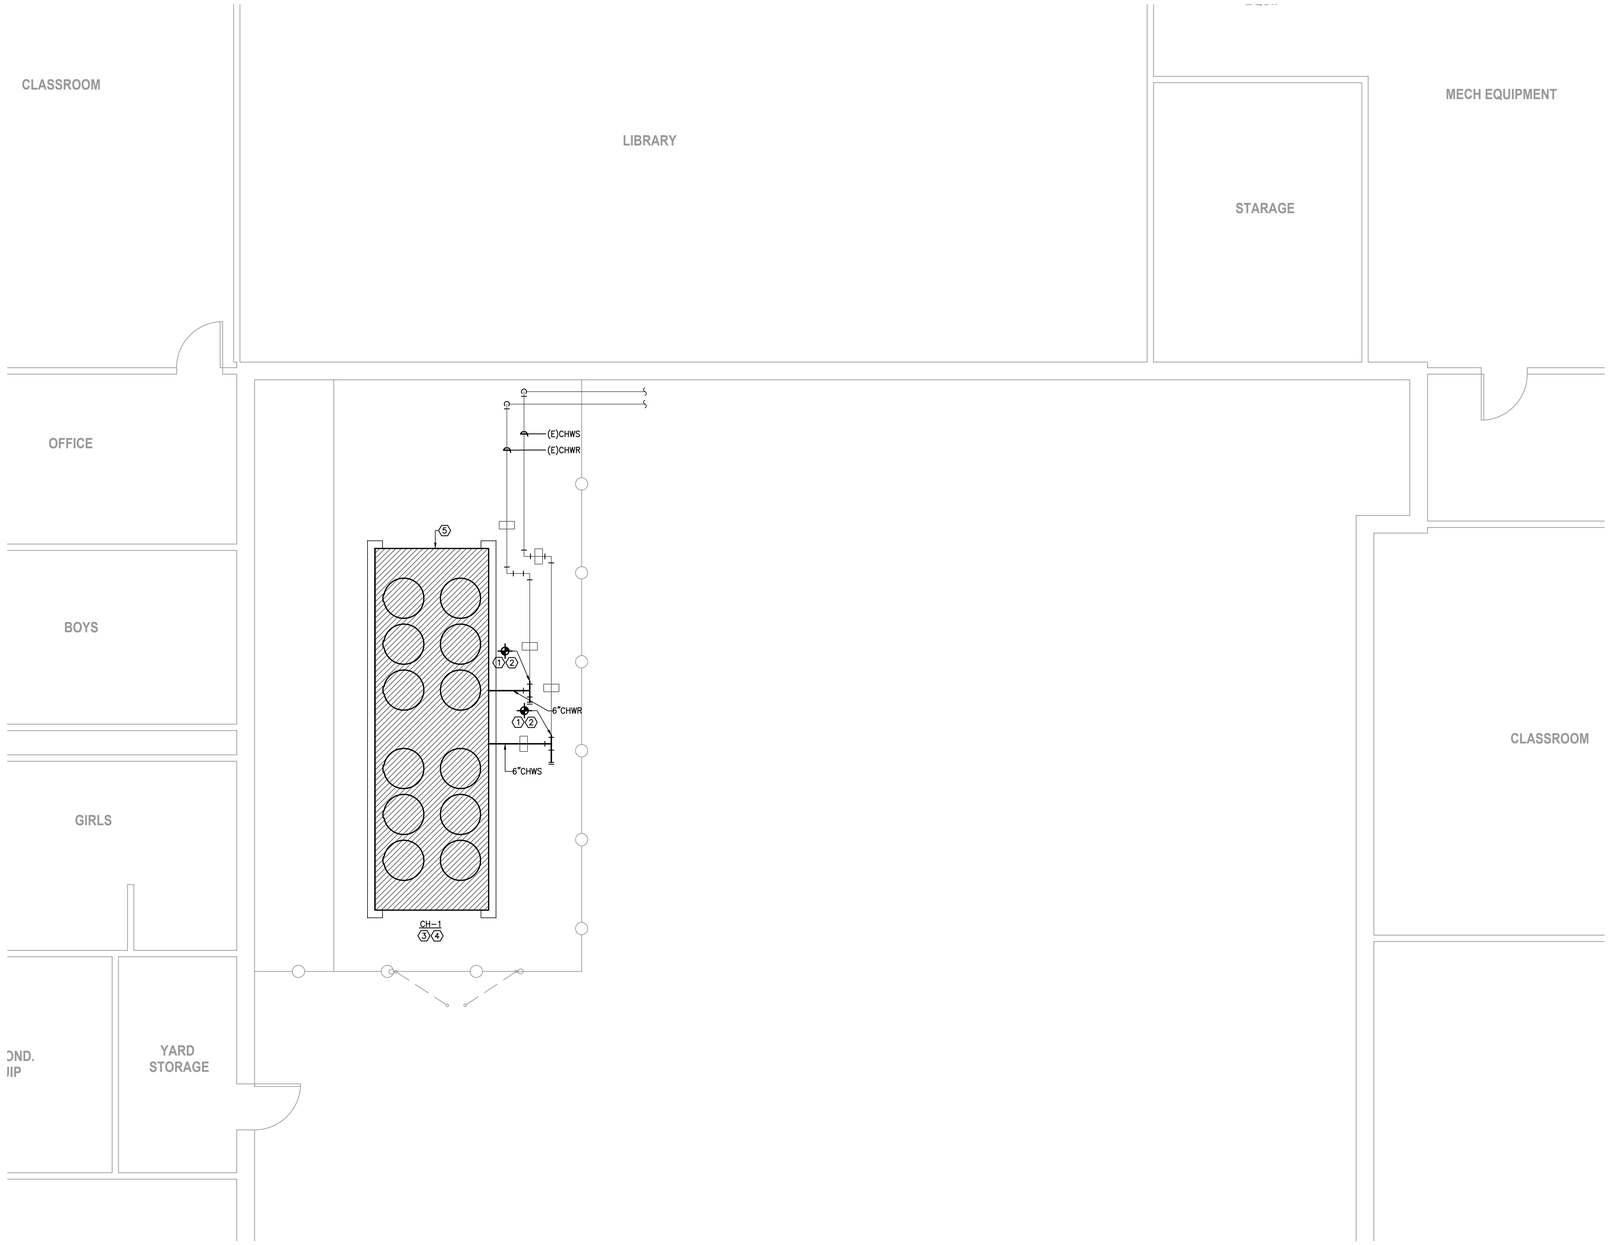

NORTH

1 **MECHANICAL FLOOR PLAN - MARSHALL MS**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED PROFESSIONAL ENGINEER
05-16-2022

MECHANICAL FLOOR PLAN - MARSHALL MS

M1.1

PACKAGED AIR COOLED SCREW CHILLER

MARK	ACTUAL CAPACITY (TONS)	LEAVING WATER TEMP. (°F)	GPM	MAXIMUM WATER PRESSURE DROP (FT.)	AMBIENT AIR TEMP. (°F)	CURRENT CHARACTERISTIC	REMARKS
CH-1	183	44	610.0	20.0	95.0	460/3/60	1,2,3

GENERAL NOTES:

1. MAXIMUM FOULING FACTOR FOR THE EVAPORATOR IS 0.0001
2. MAINTAIN MINIMUM CLEARANCES REQUIRED BY CHILLER MANUFACTURER FOR PROPER AIRFLOW TO FANS AND UNIT. MAINTAIN MINIMUM CLEARANCE AS REQUIRED TO OPEN ACCESS AND CONTROL DOORS ON EQUIPMENT FOR SERVICE, MAINTENANCE AND INSPECTION. MAINTAIN MINIMUM ELECTRICAL CLEARANCES AS REQUIRED BY NEC.
3. CHILLER SHALL MEET OR EXCEED THE AHRI FULL-LOAD AND PART-LOAD PATH A OR PATH B EFFICIENCIES INDICATED IN THE 2015 IECC.

REMARKS:

1. PROVIDE WITH LOW AMBIENT HEAD PRESSURE CONTROL.
2. PROVIDE WITH INTEGRAL MAIN ELECTRICAL DISCONNECT SWITCH.
3. PROVIDE WITH INSULATION ON ALL SUCTION LINES.

SYMBOL LEGEND

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
GENERAL	
(#)	KEY NOTE TAG
(#)	NOTE SPECIFIC TO DETAIL TAG
(#)	REVISION TAG
	NEW EQUIPMENT
PIPING	
—D—	CONDENSATE DRAIN LINE
—AD—	AUXILLARY CONDENSATE DRAIN LINE
—RLR—	REFRIGERANT LIQUID & GAS RECIRCULATION LINE (TOTAL OF TWO PIPES, ONLY ONE PIPE SHOWN FOR DRAWING CLARITY)
—RL—	REFRIGERANT LIQUID LINE
—HG—	REFRIGERANT HOT GAS LINE
—RS—	REFRIGERANT SUCTION LINE
	ELBOW UP
	ELBOW DOWN
	90° ELBOW
	45° ELBOW
	TEE
	TEE DOWN
	TEE UP
	TOP BRANCH CONNECTION
	BOTTOM BRANCH CONNECTION
	FLANGE
	CAP
	CONTINUATION
	FLOOR DRAIN (REFER TO PLUMBING DRAWINGS)
	PIPE GUIDE
SUBSCRIPTS AND ABREVIATIONS	
AFF	ABOVE FINISHED FLOOR
BBS	BELOW BOTTOM OF STRUCTURE
BOD	BOTTOM OF DUCT
BOP	BOTTOM OF PIPE
CA	COMBUSTION AIR
CFM	CUBIC FEET PER MINUTE
EA	EXHAUST AIR
FPM	FEET PER MINUTE
NC	NORMALLY CLOSED
NO	NORMALLY OPEN
OA	OUTSIDE AIR
RA	RETURN AIR
SA	SUPPLY AIR
RENOVATIONS	
	POINT OF CONNECTION FROM NEW TO EXISTING
	ITEM TO REMAIN
	ITEM TO BE REMOVED

MS03

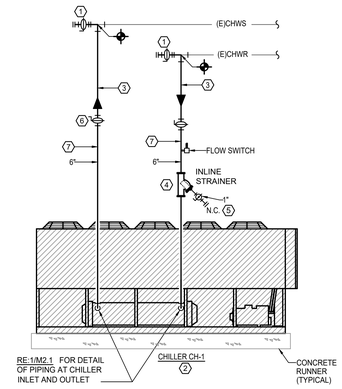

MECHANICAL KEYED NOTES

1. TEMPORARY CHILLED WATER ISOLATION VALVE AND BLIND FLANGE.
2. PROVIDE 12" WIDE X 12" TALL X UNIT LENGTH CONCRETE RUNNER REINFORCED WITH 4 CONTINUOUS #4 REBAR WITH #3 STIRRUPS AT 18" O.C. SPACING. PROVIDE 1-1/2" COVER ON TOP AND SIDES AND 3" COVER ON BOTTOM OF BEAM. (TYPICAL OF 2)
3. PROVIDE ALL OUTDOOR PIPING WITH INSULATION AND ALUMINUM JACKETING AS SPECIFIED.
4. PROVIDE INLINE STRAINER IN VERTICAL PIPE WITH 1" DRAIN LINE.
5. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.
6. BALANCING VALVE TO BE PROVIDED WITH INFINITE POSITION CRANK OR MEMORY STOP FOR BALANCING SERVICE.
7. CONTRACTOR SHALL FIELD VERIFY EXISTING PIPE SIZES.

3 CHILLED WATER PIPING DIAGRAM

SCALE: NO SCALE



NOTES: 1. SEE TEMPERATURE TEST WELL DETAIL FOR MOUNTING ARRANGEMENTS AND CLEARANCES
2. MOUNT TO BE READABLE FROM FLOOR AT 5'-6" EYE LEVEL (7'-0" MAX.)

2 THERMOMETER INSTALLATION

SCALE: NONE CP009



MECHANICAL KEYED NOTES

1. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.

1 TYPICAL PIPING AT INLET AND OUTLET OF CHILLER

SCALE: NONE

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALASO'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



MECHANICAL DETAILS AND SCHEDULES - MARSHALL MS

M2.1

SYMBOL SCHEDULE

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
LIGHTING (LETTER DENOTES TYPE – SEE LIGHT FIXTURE SCHEDULE)	
▭	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED
▬	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED ON EMERGENCY CIRCUIT
○	DOWNLIGHT FIXTURE
◐	DOWNLIGHT FIXTURE ON EMERGENCY CIRCUIT
⊢○	LIGHT FIXTURE – WALL MOUNTED
⊢◐	LIGHT FIXTURE – WALL MOUNTED ON EMERGENCY CIRCUIT
⊠	EXIT LIGHT – CEILING MOUNTED ON EMERGENCY CIRCUIT
⊢⊠	EXIT LIGHT – WALL MOUNTED ON EMERGENCY CIRCUIT
LIGHTING CONTROLS & DEVICES	
$	SINGLE POLE SWITCH
$3	3–WAY SWITCH
$4	4–WAY SWITCH
$K	KEYED SWITCH
$D	WALL BOX DIMMER, SIZE AND TYPE AS REQUIRED
$P	PILOT LIGHT SWITCH
$T	6–HOUR ROTARY TIMER SWITCH WITH NO HOLD U.N.O.
▭	PUSH BUTTON EPO SWITCH (KEY RESET) WITH COVER
$MC	MOMENTARY CONTACT SWITCH
$R	LOW VOLTAGE DIGITAL KEYPAD
$B	BUILDING MANAGEMENT (BMCS) LOCAL OVERRIDE SWITCH
◈	OCCUPANCY SENSOR (AUTO ON / AUTO OFF WITHIN 20–MINUTES)
◈	VACANCY SENSOR (MANUAL ON / AUTO OFF WITHIN 10–MINUTES)
◈	PHOTOCELL SENSOR
LCS#	LIGHTING CONTROL SYSTEM. ('#' DENOTES TYPE – SEE LIGHTING CONTROLS SCHEDULE)
ERL	UL924 EMERGENCY LOAD CONTROL RELAY UNLESS NOTED OTHERWISE.
RECEPTACLES AND OUTLETS	
⊖	SIMPLEX RECEPTACLE
⊖	DUPLEX RECEPTACLE
⊖U	DUPLEX RECEPTACLE WITH TWO USB CHARGING PORTS.
⊖	125/250 VOLT, 1 PHASE, 3–WIRE, 20 AMPS UNLESS NOTED OTHERWISE
⊕	DOUBLE DUPLEX IN 2–GANG BOX WITH SINGLE COVER PLATE
⊕U	DOUBLE DUPLEX WITH TWO USB CHARGING PORTS IN 2–GANG BOX WITH SINGLE COVER PLATE
▦	DOUBLE DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE IN 2–GANG BOX WITH SINGLE COVER PLATE
▤	DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE
⊡	FLUSH FLOOR DUPLEX RECEPTACLE OUTLET
▦	FLUSH FLOOR DOUBLE DUPLEX RECEPTACLE OUTLET
⊡D△	CONCEALED SERVICE MULTI–ACCESS FLOOR BOX WITH DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
▦D△	CONCEALED SERVICE MULTI–ACCESS FLOOR BOX WITH DOUBLE DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
◍	JUNCTION BOX
⊡	FLUSH REMOTE GFCI DEVICE (LOCATE IN READILY ACCESSIBLE LOCATION)
MOTOR CONTROLLERS AND EQUIPMENT	
Ⓜ	MOTOR, MAKE FINAL MOTOR CONNECTION
$	MOTOR–RATED SWITCH. 20A UNLESS INDICATED OTHERWISE.
⊟	INTEGRAL EQUIPMENT DISCONNECT
⊠	COMBINATION MOTOR STARTER/DISCONNECT SWITCH AS REQUIRED
⊠	MOTOR STARTER
◆	PREWIRED DEVICE, MAKE ELECTRICAL FINAL CONNECTIONS
VFD	VARIABLE FREQUENCY DRIVE MOTOR CONTROLLER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
HF	HIGH EFFICIENCY HARMONIC FILTER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
T	LOW VOLTAGE TRANSFORMER, SIZE AND TYPE AS REQUIRED.
▭	CHIME/BUZZER
ELECTRICAL EQUIPMENT	
▬	ELECTRICAL PANELBOARD; REFER TO FLOOR PLANS FOR VOLTAGE.
■	DRY TYPE TRANSFORMER
▬	PLYWOOD TELEPHONE BACKBOARD
CIRCUITING	
———	CONDUIT
———	CONDUIT BELOW FLOOR, SLAB, OR GRADE
	3/4"C. UNLESS OTHERWISE NOTED; LONG HATCH, NEUTRAL; SHORT HATCH, PHASE; LONG HATCH & HOOK, INSULATED GROUND. NO HATCHES INDICATES 2 CONDUCTORS. ARROW INDICATES HOMERUN.
——+	PARTIAL ELECTRICAL HOME RUN
SUBSCRIPTS AND ABBREVIATIONS	
WP	INDICATES 'WEATHERPROOF'
H	INDICATES 'HORIZONTAL'
NL	INDICATES 'NIGHT LIGHT'.
TP	INDICATES 'TAMPER PROOF'
(KS)	INDICATES 'KNEE SPACE'. LOCATE WIRING DEVICE IN KNEESPACE
U.N.O.	INDICATES 'UNLESS NOTED OTHERWISE'
(E)	INDICATES EXISTING TO REMAIN
(R)	INDICATES REPLACE DEVICE AND COVERPLATE.
•	NEXT TO ANY SYMBOL INDICATES FINAL ROUGH–IN FIELD COORDINATION BY CONTRACTOR WITH ARCHITECTURAL MILLWORK DRAWINGS AND OTHER TRADES

GENERAL NOTES:
–ALL EXTERIOR BUILDING ELECTRICAL EQUIPMENT TO BE WEATHERPROOF NEMA–3RX MINIMUM.
–ALL EXTERIOR RECEPTACLES SHALL BE WATER RESISTANT TYPE.

ELECTRICAL GENERAL NOTES:

1. ALL EMPTY CONDUIT SHALL HAVE PULL STRING.
2. EACH CONDUIT SHALL BE LIMITED TO (3) CIRCUITS MAXIMUM.
3. ALL EXISTING EQUIPMENT SHALL REMAIN OPERATIONAL.

ELECTRICAL KEYED NOTES

1. DISCONNECT & REMOVE EXISTING EQUIPMENT WITH ASSOCIATED CONDUCTORS ALL THE WAY BACK TO SOURCE. KEEP EXISTING CONDUIT IN PLACE TO RUN NEW CONDUCTORS. EXTEND EXISTING CONDUITS TO NEW CHILLER INTEGRAL DISCONNECT LOCATION.
2. DISCONNECT ALL EQUIPMENT CONNECTIONS. KEEP EXISTING CONDUITS IN PLACE FOR CONNECTION OF NEW EQUIPMENT. FIELD VERIFY CIRCUIT(S) ORIGINATION(S).
3. KEEP EXISTING CONTROLS CONDUIT(S) IN PLACE & EXTEND TO NEW CHILLER AS REQUIRED.

DEMO SYMBOL LEGEND

RENOVATIONS	
———	EXISTING TO REMAIN EQUIPMENT
– – –	SCOPE OF DEMO WORK

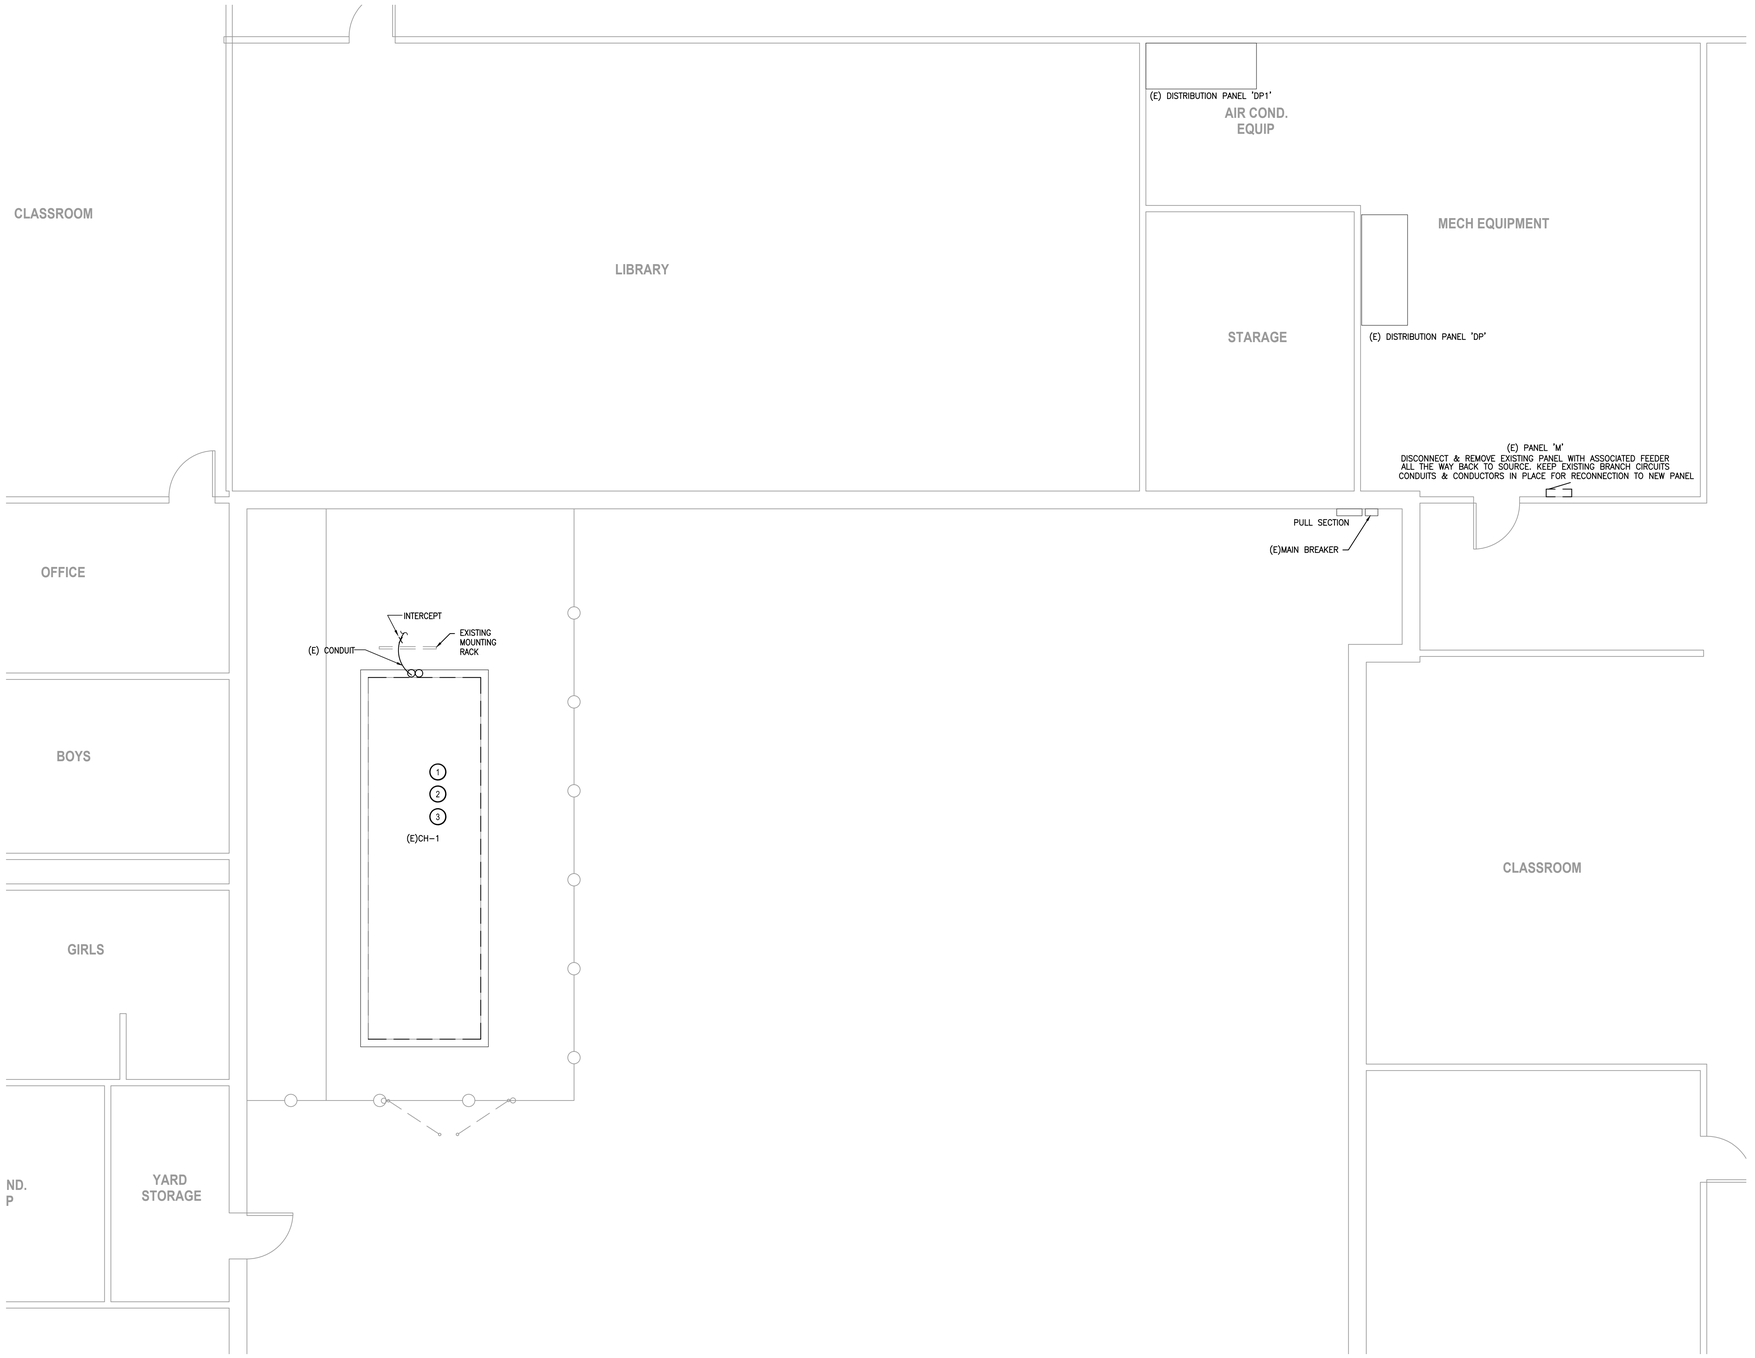

NORTH

1 **ELECTRICAL DEMOLITION FLOOR PLAN - MARSHALL MS**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: AH
Checked By: JZ
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS
SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference.
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT
BISD Preparing Our Next Generation



ELECTRICAL DEMOLITION FLOOR PLAN - MARSHALL MS

E0.1

SYMBOL LEGEND

RENOVATIONS	
	EXISTING TO REMAIN
	NEW

ELECTRICAL KEYED NOTES:

1. CONNECT NEW MECHANICAL EQUIPMENT USING NEW CONDUCTORS BACK IN EXISTING CONDUITS. SEE ONE LINE DIAGRAM. RECONNECT EQUIPMENT ELECTRODE CONDUCTOR. REPLACE ELECTRODE CONDUCTOR WITH NEW, USE #6 CU MINIMUM. PROVIDE GROUNDING RODS AS REQUIRED.
2. RECONNECT ALL EQUIPMENT RELATED CONNECTIONS VIA EXISTING CONDUITS. EXTEND EXISTING CONDUITS TO ACCOMMODATE NEW POINT OF CONNECTION AS REQUIRED. PROVIDE ADDITIONAL WP JUNCTION BOXES & CONDUITS AS NECESSARY.
3. PROVIDE ADDITIONAL WP JUNCTION BOXES & CONDUITS TO ACCOMMODATE NEW POINT OF EQUIPMENT CONTROLS CONNECTION AS REQUIRED.
4. PROVIDE 3/4"C WITH (2)#10 CU & (1) #10 CU GND TO PANEL. PROVIDE 30A/1P GFE 30mA BREAKER AT THE PANEL.

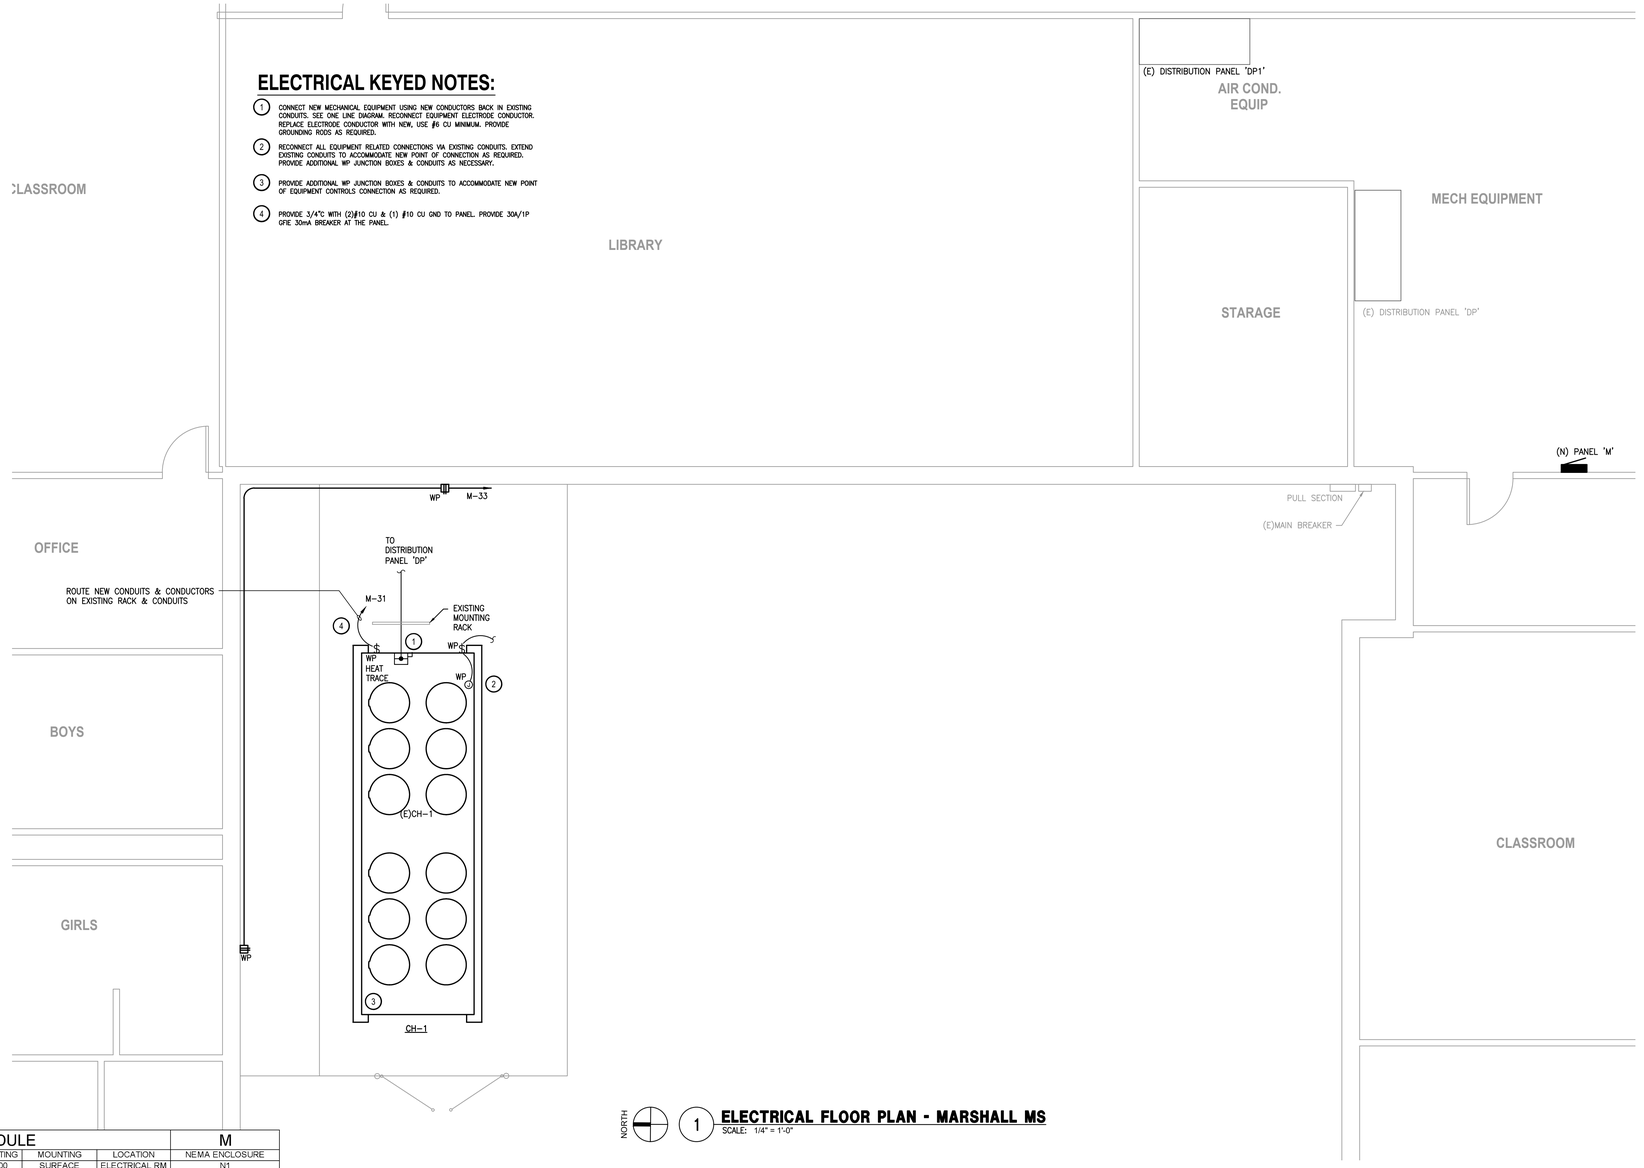

1 ELECTRICAL FLOOR PLAN - MARSHALL MS

SCALE: 1/4" = 1'-0"

NEW PANELBOARD SCHEDULE — M

VOLTAGE	PHASE	WIRE	MCB (A)	MLO (A)	AIC RATING	MOUNTING	LOCATION	NEMA ENCLOSURE
120 208	3	4	MLO	200	10,000	SURFACE	ELECTRICAL RM	N1

LOAD TYPE LEGEND				REMARKS
L	LIGHTING/CONT-LD	K	KITCHEN EQUIP	PROVIDE EQUIPMENT GROUNDING BUS AND FEED THRU AND/OR SUB FEED LUGS
R	RECEPTACLES	E	EXISTING	PROVIDE (2) SECTIONS PANEL EACH SECTION IS 42 POLES
M	MECHANICAL EQUIP	O	OTHER/MISC	

CKT #	LOAD DESCRIPTION	LOAD TYPE	WIRE SIZE	CONDUIT SIZE	CIRCUIT BREAKER TRIP	CIRCUIT BREAKER P	LOAD (VA)	PHASE	LOAD (VA)	CIRCUIT BREAKER P	CIRCUIT BREAKER TRIP	CONDUIT SIZE	WIRE SIZE	LOAD TYPE	LOAD DESCRIPTION	CKT #
1	RECEP ROOM PHYS GYM	R	E	E	20A	1	500	A	500	1	20A	E	E	R	RECEP - LIBRARY	2
3	RECEP LIBRARY	R	E	E	20A	1	500	B	500	1	20A	E	E	R	RECEP - LIBRARY	4
5	RECEP - MATH ROOM	R	E	E	20A	1	500	C	500	1	20A	E	E	R	RECEP - LIBRARY	6
7	AIR COMPRESSOR	M	E	E	20A	1	500	A	500	1	20A	E	E	M	BOILER FANS	8
9	LTG - G LOCKER	L	E	E	20A	1	500	B	500	1	20A	E	E	L	LTG - LIBRARY	10
11	LTG - EXTERIOR	L	E	E	20A	1	500	C	500	1	20A	E	E	L	LTG - HALL	12
13	GYM ELECTRICAL DOOR	M	E	E	20A	1	500	A	500	1	20A	E	E	L	LTG - LIBRARY	14
15	LTG - LOCKER	L	E	E	20A	1	500	B	500	1	20A	E	E	L	LTG - LIBRARY	16
17	LTG - PHYS	L	E	E	20A	1	500	C	500	1	20A	E	E	L	LTG - HALL	18
19	LTG - OFFICE	L	E	E	20A	1	500	A	500	1	20A	E	E	L	LTG - MECHANICAL ROOM	20
21	HOT WATER PUMP	M	E	E	20A	1	500	B	3000			E	E	E		22
23	SMALL DOOR	M	E	E	20A	1	500	C	3000	3	40A	E	E	E	EXISTING LOAD	24
25	AC & HEAT	M	E	E	20A	1	1000	A	3000			E	E	E		26
27	EXISTING LOAD	E	E	E	20A	2	1000	B	1950	1	20A	E	E	M	WATER COOLER	28
29		E	E	E			1000	C	500	1	20A	E	E	M	EXISTING LOAD	30
31	**HEAT TRACE**	M	#10	3/4"	30A	1	500	A	0	1	20A				SPARE	32
33	**RECEP - MECHANICAL YARD**	R	#12	3/4"	20A	1	360	B	0	1	20A				SPARE	34
35	SPARE				20A	1	0	C	0	1	20A				SPARE	36
37	SPARE				20A	1	0	A	0	1	20A				SPARE	38
39	SPARE				20A	1	0	B	0	2	20A				SPARE	40
41	SPARE				20A	1	0	C	0		20A				SPARE	42

	A	B	C	TOTAL
CONNECTED LOAD ABOVE (VA)	8500	9810	8000	26310
CONNECTED AMPACITY ABOVE (A)	70.83	81.75	66.67	

LOAD TYPE	CONN LD(VA)	SUBPANELS (VA) PNL	PNL	PNL	PNL	CONN. LD (VA)	SIZING FACTOR	SIZING LOAD (VA)
LIGHTING/CONT-LD	5500	-	-	-	-	5500	125%	6875
RECEPTACLES	3360	-	-	-	-	3360	*	3360
MECHANICAL EQU	6450	-	-	-	-	6450	100%	6450
KITCHEN EQUIP	0	-	-	-	-	0	100%	0
#OF KITCHEN EQU	0	-	-	-	-	0	**	
EXISTING	9950	-	-	-	-	9950	125%	12438
OTHER/MISC	0	-	-	-	-	0	100%	0
TOTAL CONNECTED (VA)						25260		29123 SIZING TOTAL (VA) PER NEC
CONNECTED AMPACITY (A)						70.11		80.84 SIZING AMPACITY (A) PER NEC

NOTES
* 1ST 10KVA @ 100%, REMAINING @ 50%
** SIZE PER NEC TABLE 220.56
*** NON-SIMULTANEOUS LOAD
G: PROVIDE GFI CIRCUIT BREAKER
S: PROVIDE SHUNT TRIP CIRCUIT BREAKER
L: PROVIDE LOCK ON/OFF CIRCUIT

E = EXISTING CONDUIT & CONDUCTOR TO BE RECONNECTED TO NEW PANEL.

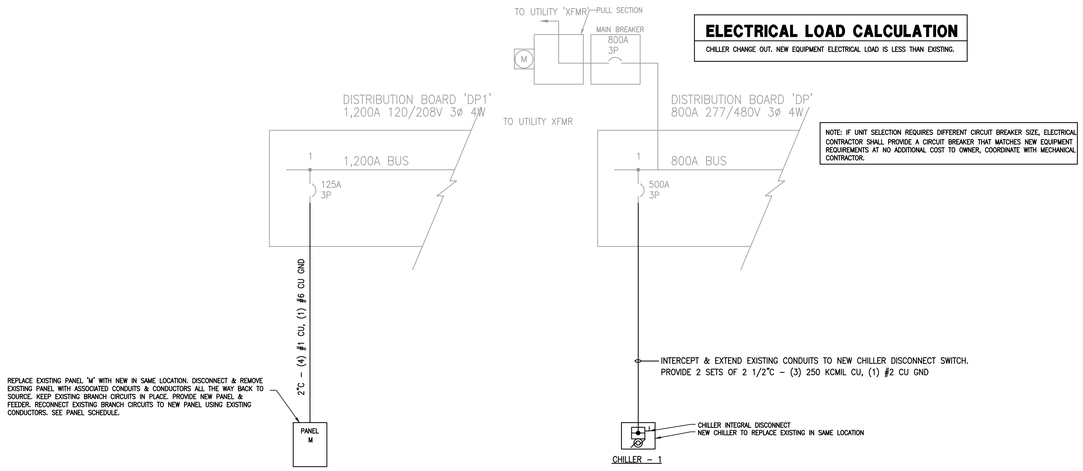

ELECTRICAL LOAD CALCULATION

CHILLER CHANGE OUT. NEW EQUIPMENT ELECTRICAL LOAD IS LESS THAN EXISTING.

NOTE: IF UNIT SELECTION REQUIRES DIFFERENT CIRCUIT BREAKER SIZE, ELECTRICAL CONTRACTOR SHALL PROVIDE A CIRCUIT BREAKER THAT MATCHES NEW EQUIPMENT REQUIREMENTS AT NO ADDITIONAL COST TO OWNER, COORDINATE WITH MECHANICAL CONTRACTOR.

2 ONE LINE DIAGRAM

SCALE: NONE

Project No: 2022-01678-00
Drawn By: AH
Checked By: JZ
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT
BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED PROFESSIONAL ENGINEER
05-16-2022

ELECTRICAL FLOOR PLAN - MARSHALL MS

E1.1

DEMOLITION GENERAL NOTES:

1. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FEILD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.
2. ALL MECHANICAL SYSTEMS SHOWN ON THIS PLAN ARE FROM EXISTING DRAWINGS AND PRELIMINARY FIELD WORK. CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL LOCATIONS AND SIZES OF MECHANICAL SYSTEMS PRIOR TO THE START OF WORK.
3. OWNER SHALL HAVE FIRST RIGHT OF REFUSAL ON ALL HVAC EQUIPMENT BEING REMOVED FROM THIS PROJECT. THIS INCLUDES BUT NOT LIMITED TO INTERNAL COMPONENTS OF CHILLERS, VALVES, AND PIPE STANDS.

DEMOLITION KEYED NOTES:

1. REMOVE EXISTING CHW S/R PIPING AND ASSOCIATED VALVES UP TO POINT INDICATED. CONTRACTOR SHALL VERIFY EXISTING PIPE SIZE BEFORE DEMOLISHING.
2. EXISTING CHW S/R PIPING TO REMAIN.
3. EXISTING PUMP, CONCRETE PAD, AND ALL ASSOCIATED APPURTENANCES SHALL REMAIN.
4. EXISTING AIR COOLED CHILLER SHALL BE REMOVED. EXISTING CONCRETE PAD SHALL REMAIN.
5. EXISTING EXPANSION TANK, PIPING, AND ALL ASSOCIATED APPURTENANCES SHALL REMAIN.
6. EXISTING CHEMICAL FEEDER, PIPING, AND ALL ASSOCIATED APPURTENANCES SHALL REMAIN.
7. EXISTING AIR SEPARATOR, PIPING, AND ALL ASSOCIATED APPURTENANCES SHALL REMAIN.
8. EXISTING BOILER SHALL REMAIN.
9. EXISTING PIPING SUPPORTS SHALL REMAIN. (TYPICAL)
10. EXISTING STORAGE TANK SHALL REMAIN.
11. EXISTING MAKEUP WATER STATION TO REMAIN.
12. REMOVE EXISTING CHILLED WATER PUMP AND ALL ASSOCIATED APPURTENANCES. EXISTING CONCRETE HOUSEKEEPING PAD SHALL REMAIN.

BMCS NOTE:
EXISTING CONTROL SYSTEM IS BY AUTOMATED LOGIC. REFER TO BMCS SPECIFICATION FOR MORE INFORMATION.

DEMO SYMBOL LEGEND	
RENOVATIONS	
	ITEM TO REMAIN
	ITEM TO BE REMOVED

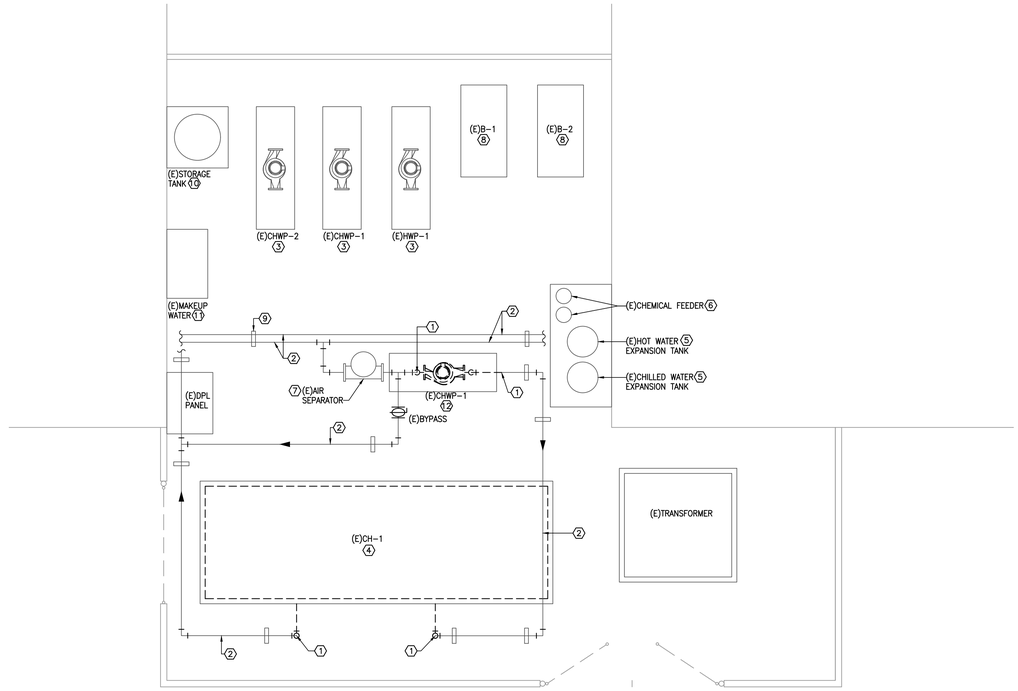

NORTH

1 **MECHANICAL DEMOLITION FLOOR PLAN - PAUL BROWN LC**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: BB
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference.
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



05-16-2022

MECHANICAL DEMOLITION FLOOR PLAN - PAUL BROWN LC

M0.1

MECHANICAL GENERAL NOTES:

1. MECHANICAL CONTRACTOR SHALL COORDINATE WITH THE ELECTRICAL CONTRACTOR FOR ALL ELECTRICAL POWER REQUIREMENTS.
2. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FIELD–VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.

MECHANICAL KEYED NOTES:

(1) INSULATE AND PROVIDE ALUMINUM JACKETING ON OUTDOOR PIPING. REFER TO SPECIFICATIONS.

(2) PROVIDE NEW CHW S/R PIPING AT EXISTING SIZE AND CONNECT TO EXISTING PIPING. RE:4/M2.1 FOR PARTIAL PIPING DIAGRAM.

(3) VERIFY AIRFLOW AND SERVICE CLEARANCES WITH MANUFACTURER. COORDINATE WITH OTHER TRADES NOT TO OBSTRUCT.

(4) INSTALL NEW CHILLER ON EXISTING CONCRETE PAD. EXTEND EXISTING CONCRETE PAD AS REQUIRED TO ACCOMMODATE NEW CHILLER.

(5) PROVIDE NEW VERTICAL INLINE PUMP. REFER TO DETAILS. INSTALL NEW PUMP ON EXISTING CONCRETE HOUSEKEEPING PAD.

(6) POWER CONNECTION FOR NEW CHILLER SHALL BE AT THIS END, SAME LOCATION AS DEMOLISHED CHILLER.

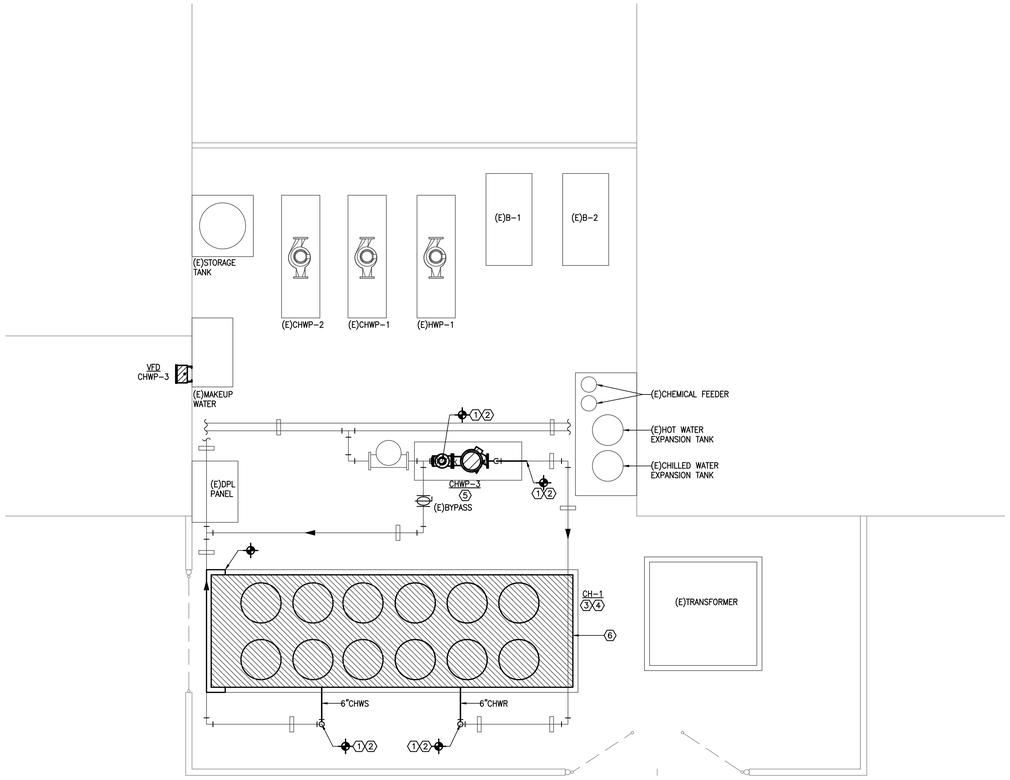

NORTH

1 **MECHANICAL FLOOR PLAN - PAUL BROWN LC**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: BB
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED PROFESSIONAL ENGINEER
05-16-2022

MECHANICAL FLOOR PLAN - PAUL BROWN LC

M1.1

SYMBOL LEGEND

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
GENERAL	
(#)	KEY NOTE TAG
(#)	NOTE SPECIFIC TO DETAIL TAG
	REVISION TAG
	NEW EQUIPMENT
PIPING	
—D—	CONDENSATE DRAIN LINE
—AD—	AUXILLARY CONDENSATE DRAIN LINE
—RLR—	REFRIGERANT LIQUID & GAS RECIRCULATION LINE (TOTAL OF TWO PIPES, ONLY ONE PIPE SHOWN FOR DRAWING CLARITY)
—RL—	REFRIGERANT LIQUID LINE
—HG—	REFRIGERANT HOT GAS LINE
—RS—	REFRIGERANT SUCTION LINE
	ELBOW UP
	ELBOW DOWN
	90° ELBOW
	45° ELBOW
	TEE
	TEE DOWN
	TEE UP
	TOP BRANCH CONNECTION
	BOTTOM BRANCH CONNECTION
	FLANGE
	CAP
	CONTINUATION
	FLOOR DRAIN (REFER TO PLUMBING DRAWINGS)
	PIPE GUIDE
SUBSCRIPTS AND ABREVIATIONS	
AFF	ABOVE FINISHED FLOOR
BBS	BELOW BOTTOM OF STRUCTURE
BOD	BOTTOM OF DUCT
BOP	BOTTOM OF PIPE
CA	COMBUSTION AIR
CFM	CUBIC FEET PER MINUTE
EA	EXHAUST AIR
FPM	FEET PER MINUTE
NC	NORMALLY CLOSED
NO	NORMALLY OPEN
OA	OUTSIDE AIR
RA	RETURN AIR
SA	SUPPLY AIR
RENOVATIONS	
	POINT OF CONNECTION FROM NEW TO EXISTING
	ITEM TO REMAIN
	ITEM TO BE REMOVED

MS03

PUMP

MARK	SERVICE	TYPE	GPM	HEAD (FT.)	MAXIMUM RPM	MOTOR HORSEPOWER	CURRENT	MANUFACTURER	MODEL	REMARKS
CHWP-3	CHILLED WATER	VERTICAL INLINE	420	40	1,800	7.5	208/3/60	BELL & GOSSETT	E-80	(1,2,3)

GENERAL NOTES:
1. PUMP IS TO HAVE A NON-OVERLOADING MOTOR.
2. MINIMUM RECOMMENDED CLEARANCE AROUND A PUMP IS 24 INCHES. MAINTAIN MINIMUM CLEARANCES AS REQUIRED FOR SERVICE, MAINTENANCE, AND INSPECTION.

REMARKS:
1. PROVIDE PUMP AND SUCTION DIFFUSER WITH GAUGE TRAPPINGS.
2. PROVIDE VARIABLE FREQUENCY DRIVE.
3. PROVIDE GAUGE TAPPINGS.

PACKAGED AIR COOLED SCREW CHILLER

MARK	ACTUAL CAPACITY (TONS)	LEAVING WATER TEMP. (°F)	GPM	MAXIMUM WATER PRESSURE DROP (FT.)	AMBIENT AIR TEMP. (°F)	CURRENT CHARACTERISTIC	REMARKS
CH-1	183	44	420.0	20.0	95.0	230/3/60	1,2,3

GENERAL NOTES:
1. MAXIMUM FOULING FACTOR FOR THE EVAPORATOR IS 0.0001
2. MAINTAIN MINIMUM CLEARANCES REQUIRED BY CHILLER MANUFACTURER FOR PROPER AIRFLOW TO FANS AND UNIT. MAINTAIN MINIMUM CLEARANCE AS REQUIRED TO OPEN ACCESS AND CONTROL DOORS ON EQUIPMENT FOR SERVICE, MAINTENANCE AND INSPECTION. MAINTAIN MINIMUM ELECTRICAL CLEARANCES AS REQUIRED BY NEC.
3. CHILLER SHALL MEET OR EXCEED THE AHRI FULL-LOAD AND PART-LOAD PATH A OR PATH B EFFICIENCIES INDICATED IN THE 2015 IECC.

REMARKS:
1. PROVIDE WITH LOW AMBIENT HEAD PRESSURE CONTROL.
2. PROVIDE WITH INTEGRAL MAIN ELECTRICAL DISCONNECT SWITCH.
3. PROVIDE WITH INSULATION ON ALL SUCTION LINES.

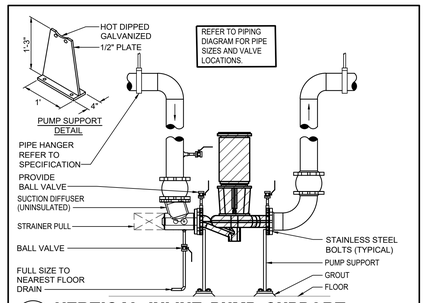

3 VERTICAL INLINE PUMP SUPPORT
SCALE: NONE



MECHANICAL KEYED NOTES

1. CONTRACTOR SHALL FIELD VERIFY EXISTING PIPE SIZES.
2. INSTALL NEW CHILLER ON EXISTING CONCRETE HOUSEKEEPING PAD. EXTEND EXISTING HOUSEKEEPING PAD AS REQUIRED TO ACCOMMODATE NEW CHILLER.
3. PROVIDE ALL OUTDOOR PIPING WITH INSULATION AND ALUMINUM JACKETING AS SPECIFIED.
4. PROVIDE INLINE STRAINER IN VERTICAL PIPE WITH 1" DRAIN LINE.
5. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.
6. BALANCING VALVE TO BE PROVIDED WITH INFINITE POSITION CRANK OR MEMORY STOP FOR BALANCING SERVICE.

4 CHILLED WATER PIPING DIAGRAM
SCALE: NO SCALE

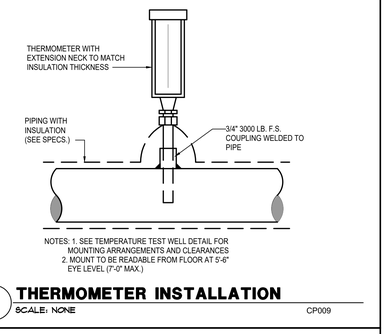

2 THERMOMETER INSTALLATION
SCALE: NONE CP009

MECHANICAL KEYED NOTES

1. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.



1 TYPICAL PIPING AT INLET AND OUTLET OF CHILLER
SCALE: NONE

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



MECHANICAL DETAILS AND SCHEDULES - PAUL BROWN LC

M2.1

SYMBOL SCHEDULE

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
LIGHTING (LETTER DENOTES TYPE – SEE LIGHT FIXTURE SCHEDULE)	
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED ON EMERGENCY CIRCUIT
	DOWNLIGHT FIXTURE
	DOWNLIGHT FIXTURE ON EMERGENCY CIRCUIT
	LIGHT FIXTURE – WALL MOUNTED
	LIGHT FIXTURE – WALL MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – CEILING MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – WALL MOUNTED ON EMERGENCY CIRCUIT
LIGHTING CONTROLS & DEVICES	
$	SINGLE POLE SWITCH
$3	3-WAY SWITCH
$4	4-WAY SWITCH
$K	KEYED SWITCH
$D	WALL BOX DIMMER, SIZE AND TYPE AS REQUIRED
$P	PILOT LIGHT SWITCH
$T	6-HOUR ROTARY TIMER SWITCH WITH NO HOLD U.N.O.
	PUSH BUTTON EPO SWITCH (KEY RESET) WITH COVER
$MC	MOMENTARY CONTACT SWITCH
$R	LOW VOLTAGE DIGITAL KEYPAD
$B	BUILDING MANAGEMENT (BMCS) LOCAL OVERRIDE SWITCH
	OCCUPANCY SENSOR (AUTO ON / AUTO OFF WITHIN 20-MINUTES)
	VACANCY SENSOR (MANUAL ON / AUTO OFF WITHIN 10-MINUTES)
	PHOTOCELL SENSOR
LCS	LIGHTING CONTROL SYSTEM. ('#' DENOTES TYPE – SEE LIGHTING CONTROLS SCHEDULE)
ERC	UL924 EMERGENCY LOAD CONTROL RELAY UNLESS NOTED OTHERWISE.
RECEPTACLES AND OUTLETS	
	SIMPLEX RECEPTACLE
	DUPLEX RECEPTACLE
U	DUPLEX RECEPTACLE WITH TWO USB CHARGING PORTS.
	125/250 VOLT, 1 PHASE, 3-WIRE, 20 AMPS UNLESS NOTED OTHERWISE
	DOUBLE DUPLEX IN 2-GANG BOX WITH SINGLE COVER PLATE
U	DOUBLE DUPLEX WITH TWO USB CHARGING PORTS IN 2-GANG BOX WITH SINGLE COVER PLATE
	DOUBLE DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE IN 2-GANG BOX WITH SINGLE COVER PLATE
	DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE
	FLUSH FLOOR DUPLEX RECEPTACLE OUTLET
	FLUSH FLOOR DOUBLE DUPLEX RECEPTACLE OUTLET
DA	CONCEALED SERVICE MULTI-ACCESS FLOOR BOX WITH DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
DA	CONCEALED SERVICE MULTI-ACCESS FLOOR BOX WITH DOUBLE DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
	JUNCTION BOX
GFCI	FLUSH REMOTE GFCI DEVICE (LOCATE IN READILY ACCESSIBLE LOCATION)
MOTOR CONTROLLERS AND EQUIPMENT	
	MOTOR, MAKE FINAL MOTOR CONNECTION
$	MOTOR-RATED SWITCH. 20A UNLESS INDICATED OTHERWISE.
	INTEGRAL EQUIPMENT DISCONNECT
J	COMBINATION MOTOR STARTER/DISCONNECT SWITCH AS REQUIRED
	MOTOR STARTER
	PREWIRED DEVICE, MAKE ELECTRICAL FINAL CONNECTIONS
VFD	VARIABLE FREQUENCY DRIVE MOTOR CONTROLLER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
HF	HIGH EFFICIENCY HARMONIC FILTER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
T	LOW VOLTAGE TRANSFORMER, SIZE AND TYPE AS REQUIRED.
	CHIME/BUZZER
ELECTRICAL EQUIPMENT	
	ELECTRICAL PANELBOARD; REFER TO FLOOR PLANS FOR VOLTAGE.
	DRY TYPE TRANSFORMER
	PLYWOOD TELEPHONE BACKBOARD
CIRCUITING	
	CONDUIT
	CONDUIT BELOW FLOOR, SLAB, OR GRADE
	3/4"C. UNLESS OTHERWISE NOTED; LONG HATCH, NEUTRAL; SHORT HATCH, PHASE; LONG HATCH & HOOK, INSULATED GROUND. NO HATCHES INDICATES 2 CONDUCTORS. ARROW INDICATES HOMERUN.
	PARTIAL ELECTRICAL HOME RUN
SUBSCRIPTS AND ABBREVIATIONS	
WP	INDICATES "WEATHERPROOF"
H	INDICATES "HORIZONTAL"
NL	INDICATES "NIGHT LIGHT".
TP	INDICATES "TAMPER PROOF"
(KS)	INDICATES "KNEE SPACE". LOCATE WIRING DEVICE IN KNEESPACE
U.N.O.	INDICATES "UNLESS NOTED OTHERWISE"
(E)	INDICATES EXISTING TO REMAIN
(R)	INDICATES REPLACE DEVICE AND COVERPLATE.
•	NEXT TO ANY SYMBOL INDICATES FINAL ROUGH-IN FIELD COORDINATION BY CONTRACTOR WITH ARCHITECTURAL MILLWORK DRAWINGS AND OTHER TRADES

GENERAL NOTES:

-ALL EXTERIOR BUILDING ELECTRICAL EQUIPMENT TO BE WEATHERPROOF NEMA-4X MINIMUM.
-ALL EXTERIOR RECEPTACLES SHALL BE WATER RESISTANT TYPE.

ELECTRICAL GENERAL NOTES:

1. ALL EMPTY CONDUIT SHALL HAVE PULL STRING.
2. EACH CONDUIT SHALL BE LIMITED TO (3) CIRCUITS MAXIMUM.
3. ALL EXISTING EQUIPMENT SHALL REMAIN OPERATIONAL.

ELECTRICAL KEYED NOTES

1. DISCONNECT & REMOVE EXISTING EQUIPMENT WITH ASSOCIATED CONDUCTORS ALL THE WAY BACK TO SOURCE. KEEP EXISTING CONDUIT IN PLACE TO RUN NEW CONDUCTORS. EXTEND EXISTING CONDUITS TO NEW CHILLER INTEGRAL DISCONNECT LOCATION.
2. DISCONNECT ALL EQUIPMENT CONNECTIONS. KEEP EXISTING CONDUITS IN PLACE FOR CONNECTION OF NEW EQUIPMENT. FIELD VERIFY CIRCUIT(S) ORIGINATION(S).
3. KEEP EXISTING CONTROLS CONDUIT(S) IN PLACE & EXTEND TO NEW EQUIPMENT POINT OF CONNECTION AS REQUIRED.
4. DISCONNECT & REMOVE EXISTING EQUIPMENT WITH ALL ASSOCIATED CONDUITS ALL THE WAY BACK TO SOURCE. SAW CUT ABANDONED EXPOSED CONDUITS TO FLUSH MOUNT THE GROUND LEVEL. ABANDON UNDERGROUND CONDUITS IN PLACE & PROVIDE COVER.

DEMO SYMBOL LEGEND

RENOVATIONS	
	EXISTING TO REMAIN EQUIPMENT
– – – –	DISCONNECT & REMOVED EQUIPMENT

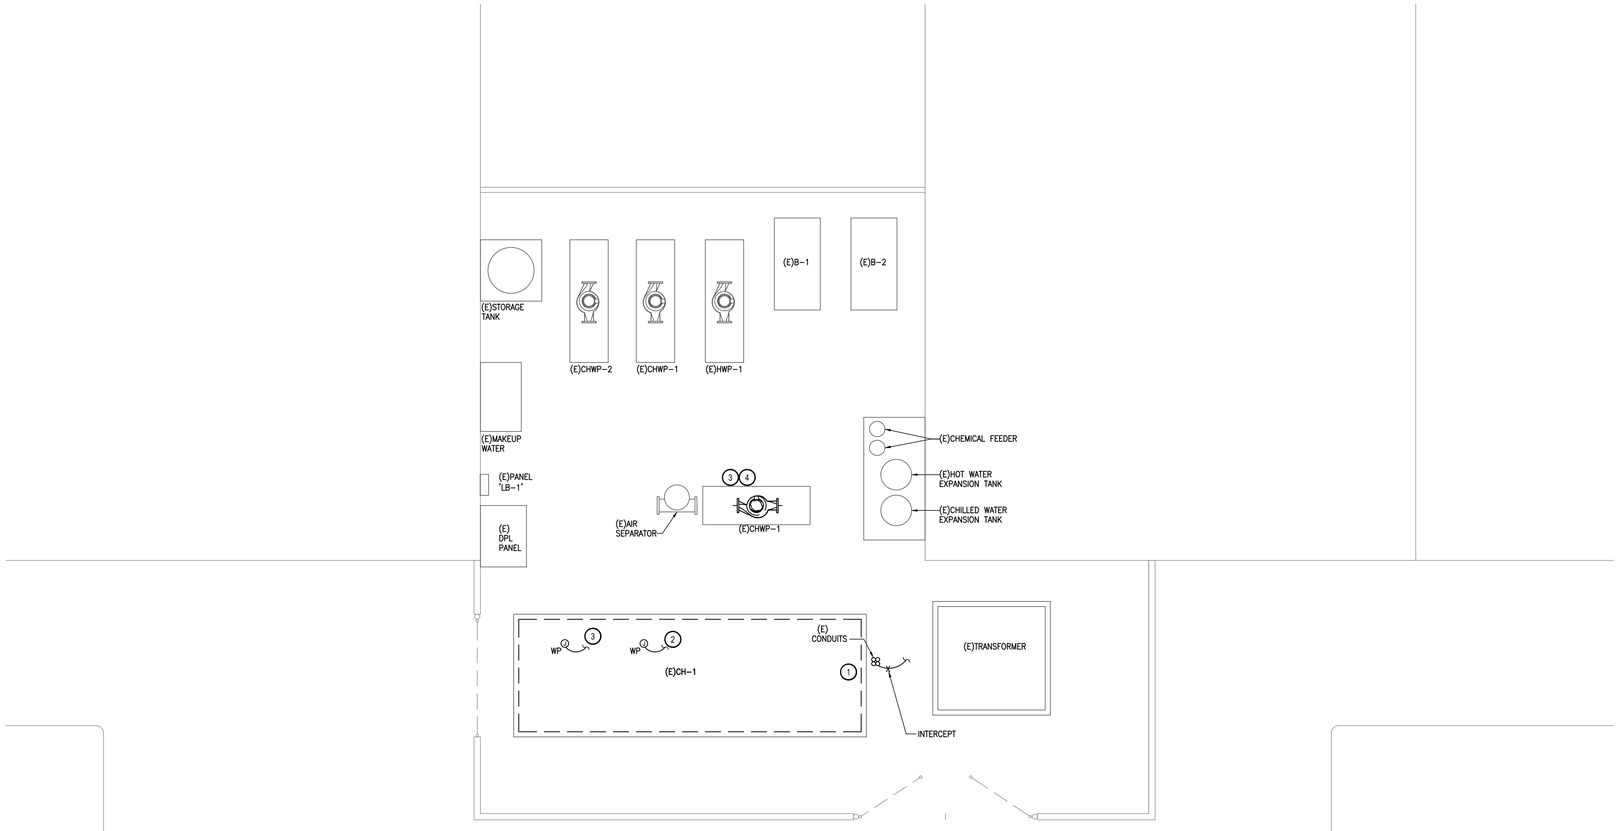

NORTH

1 **ELECTRICAL FLOOR PLAN - PAUL BROWN LC**
SCALE: 1/4" = 1'-0"

Project No:	2022-01678-00
Drawn By:	AH
Checked By:	JZ
Date:	05-16-2022
Revision Dates:	

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD
Preparing Our Next Generation



05-16-2022

ELECTRICAL DEMOLITION FLOOR PLAN - PAUL BROWN LC

E0.1

SYMBOL LEGEND

RENOVATIONS	
	EXISTING TO REMAIN
	NEW

ELECTRICAL KEYED NOTES:

1. CONNECT NEW MECHANICAL EQUIPMENT USING NEW CONDUCTORS BACK IN EXISTING UNDERGROUND CONDUITS. SEE ONE LINE DIAGRAM. RECONNECT EQUIPMENT ELECTRODE CONDUCTOR. REPLACE EQUIPMENT GROUNDING CONDUCTOR WITH NEW, USE #6 CU MINIMUM. PROVIDE GROUNDING RODS AS REQUIRED.
2. RECONNECT ALL EQUIPMENT RELATED CONNECTIONS VIA EXISTING CONDUITS & CONDUCTORS. EXTEND EXISTING CONDUITS TO ACCOMMODATE NEW POINT OF CONNECTION AS REQUIRED. PROVIDE ADDITIONAL WP JUNCTION BOXES AS NECESSARY.
3. PROVIDE ADDITIONAL WP JUNCTION BOXES & CONDUITS TO ACCOMMODATE NEW POINT OF EQUIPMENT CONTROLS CONNECTION AS REQUIRED.
4. PROVIDE 3/4"C WITH (2)#10 CU & (1) #10 CU GND TO PANEL. PROVIDE 30A/1P GFIE 30mA BREAKER AT THE PANEL.
5. CONNECT NEW PUMP VIA NEW CONDUITS & CONDUCTORS. SEE ONE-LINE DIAGRAM.

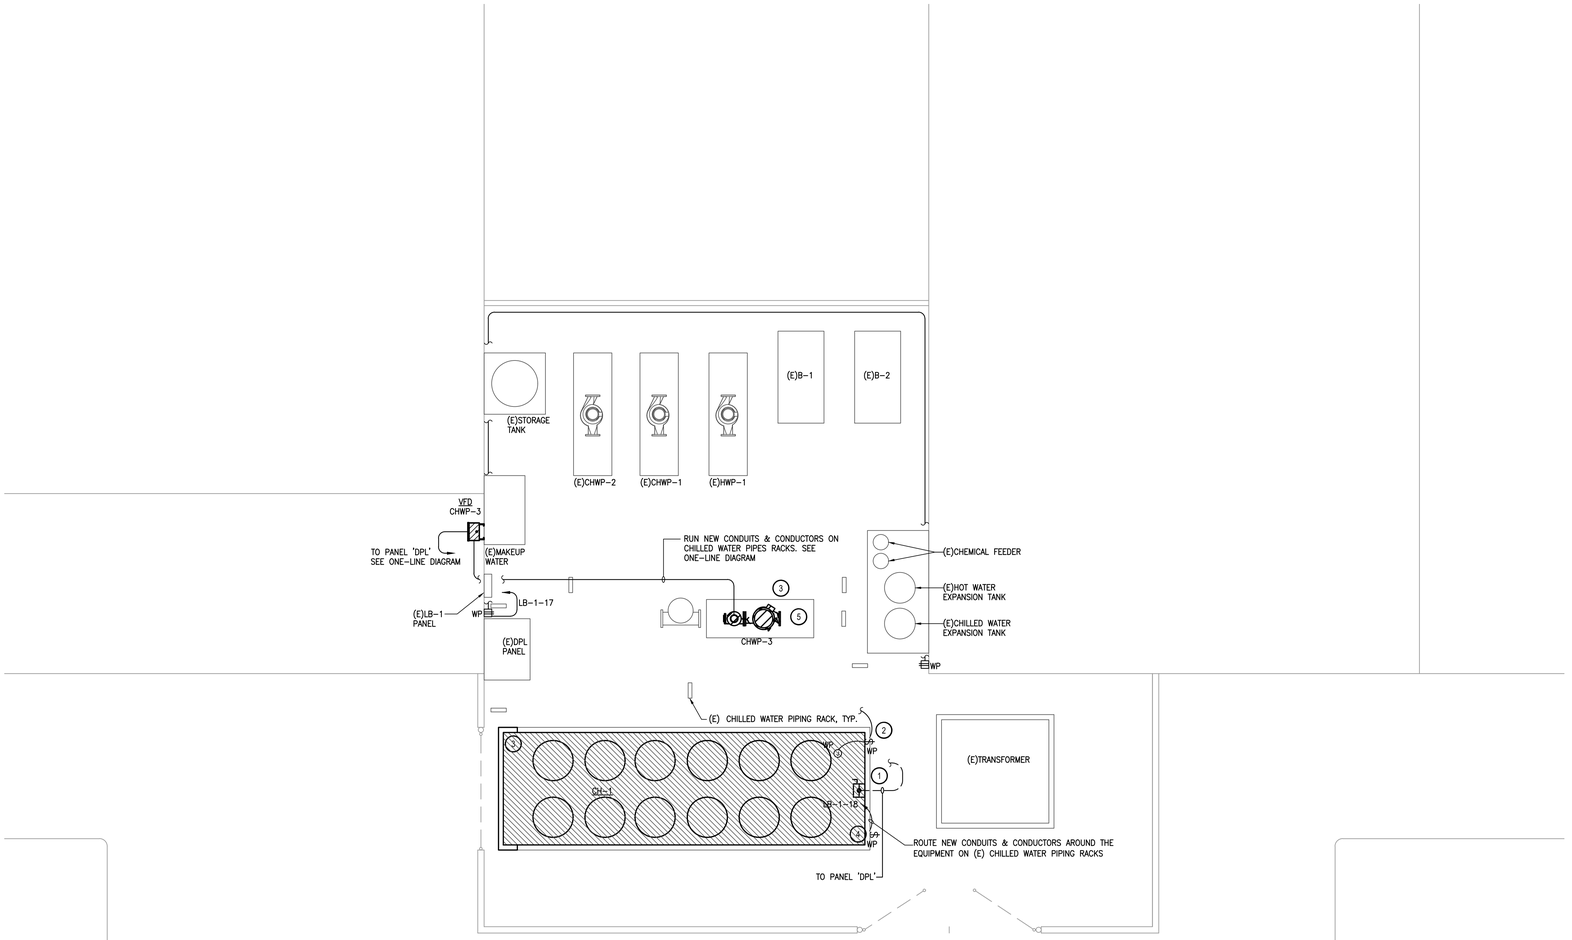

1 **ELECTRICAL FLOOR PLAN - PAUL BROWN LC**
SCALE: 1/4" = 1'-0"

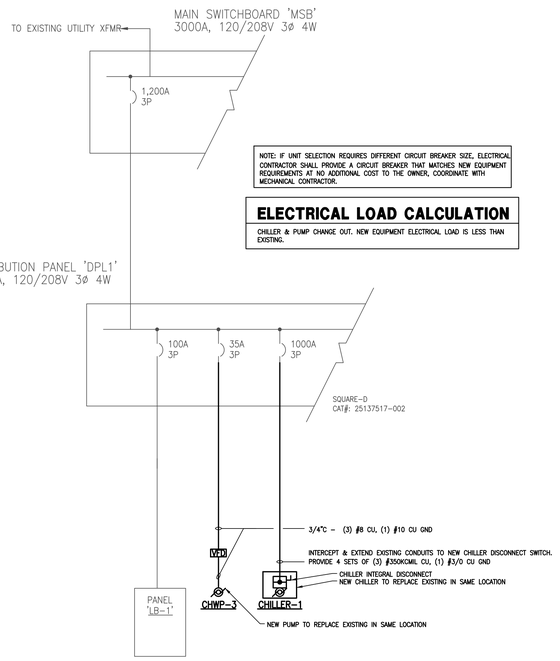

NOTE: IF UNIT SELECTION REQUIRES DIFFERENT CIRCUIT BREAKER SIZE, ELECTRICAL CONTRACTOR SHALL PROVIDE A CIRCUIT BREAKER THAT MATCHES NEW EQUIPMENT REQUIREMENTS AT NO ADDITIONAL COST TO THE OWNER, COORDINATE WITH MECHANICAL CONTRACTOR.

ELECTRICAL LOAD CALCULATION

CHILLER & PUMP CHANGE OUT. NEW EQUIPMENT ELECTRICAL LOAD IS LESS THAN EXISTING.

2 **PARTIAL ONE-LINE DIAGRAM**
SCALE: NONE

Project No:	2022-01678-00
Drawn By:	AH
Checked By:	JZ
Date:	05-16-2022
Revision Dates:	

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation

BRADLEY KALMANS
86219
LICENSED
PROFESSIONAL ENGINEER
05-16-2022

ELECTRICAL FLOOR PLAN - PAUL BROWN LC

E1.1

DEMOLITION GENERAL NOTES:

1. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FEILD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.
2. ALL MECHANICAL SYSTEMS SHOWN ON THIS PLAN ARE FROM EXISTING DRAWINGS AND PRELIMINARY FIELD WORK. CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL LOCATIONS AND SIZES OF MECHANICAL SYSTEMS PRIOR TO THE START OF WORK.
3. OWNER SHALL HAVE FIRST RIGHT OF REFUSAL ON ALL HVAC EQUIPMENT BEING REMOVED FROM THIS PROJECT. THIS INCLUDES BUT NOT LIMITED TO INTERNAL COMPONENTS OF CHILERS, VALVES, AND PIPE STANDS.

DEMOLITION KEYED NOTES:

1. REMOVE EXISTING CHW S/R PIPING AND ASSOCIATED VALVES UP TO POINT INDICATED. CONTRACTOR SHALL VERIFY EXISTING PIPE SIZE BEFORE DEMOLISHING.
2. EXISTING CHW S/R PIPING TO REMAIN.
3. EXISTING AIR COOLED CHILLER SHALL BE REMOVED. EXISTING CONCRETE PAD SHALL REMAIN.
4. EXISTING PIPING SUPPORTS SHALL REMAIN.
5. EXISTING CHILLER SHALL REMAIN IN PLACE AND OPERATIONAL.

BMCS NOTE:
EXISTING CONTROL SYSTEM IS BY AUTOMATED LOGIC. REFER TO BMCS SPECIFICATION FOR MORE INFORMATION.

DEMO SYMBOL LEGEND

RENOVATIONS	
	ITEM TO REMAIN
	ITEM TO BE REMOVED

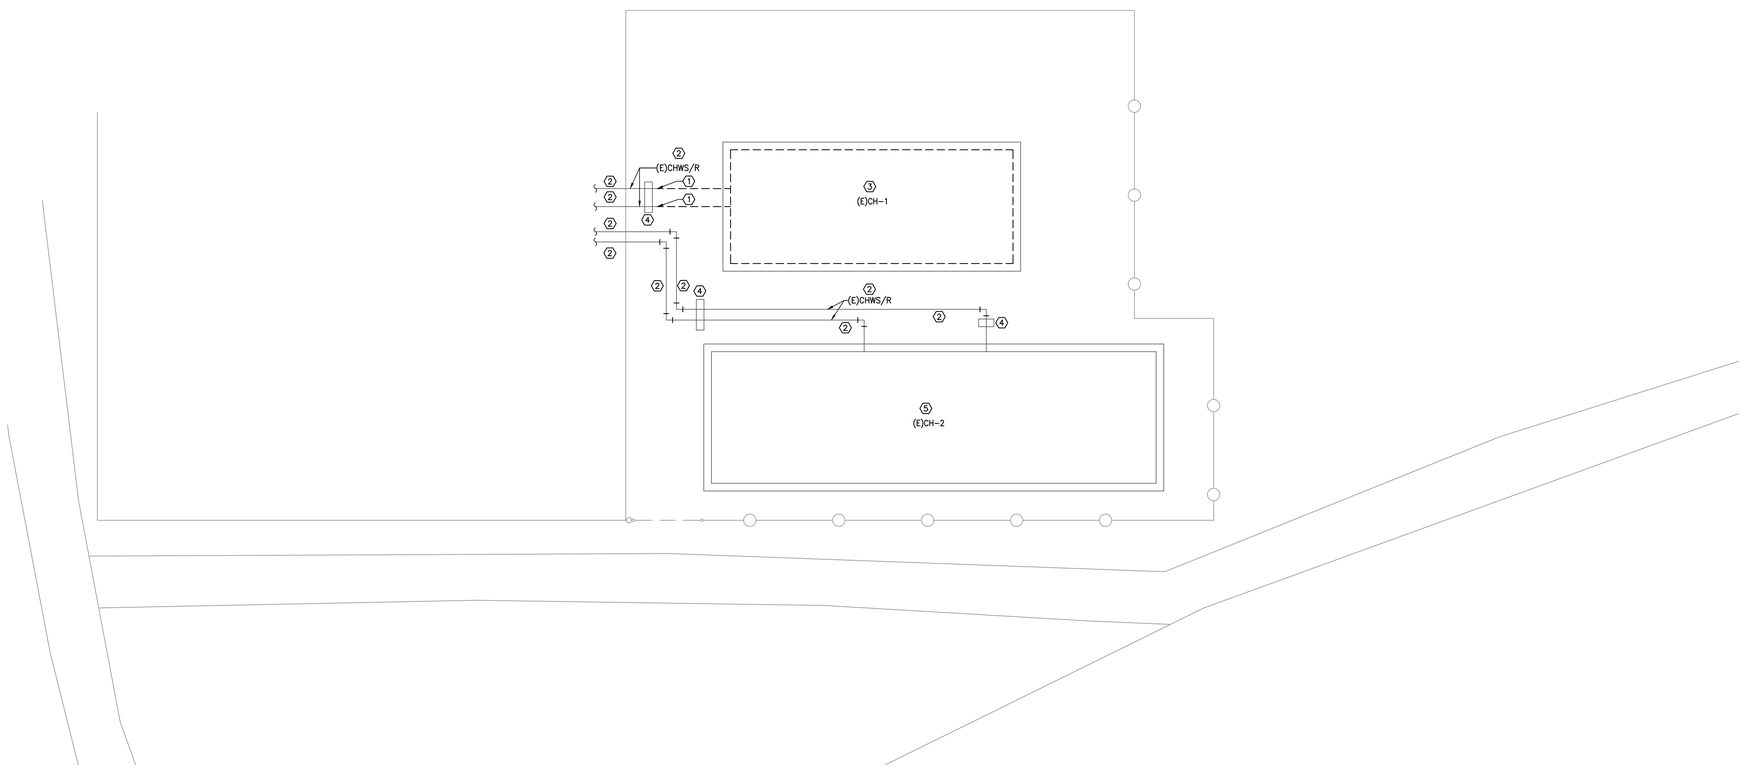

NORTH

1 **MECHANICAL DEMOLITION FLOOR PLAN - SMITH MS**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED PROFESSIONAL ENGINEER
05-16-2022

MECHANICAL DEMOLITION FLOOR PLAN - SMITH MS

M0.1

MECHANICAL GENERAL NOTES:

1. MECHANICAL CONTRACTOR SHALL COORDINATE WITH THE ELECTRICAL CONTRACTOR FOR ALL ELECTRICAL POWER REQUIREMENTS.
2. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FIELD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.

MECHANICAL KEYED NOTES:

1. PROVIDE OUTDOOR PIPING INSULATION AS SPECIFIED.
2. PROVIDE NEW CHW S/R PIPING AS SPECIFICED AND CONNECT TO EXISTING PIPING. RE:3/M2.1 FOR PARTIAL PIPING DIAGRAM.
3. VERIFY AIR-COOLED CHILLER SERVICE CLEARANCES WITH MANUFACTURER. COORDINATE WITH OTHER TRADES NOT TO OBSTRUCT.
4. INSTALL NEW CHILLER ON EXISTING CONCRETE PAD. EXTEND EXISTING CONCRETE PAD AS REQUIRED TO ACCOMMODATE NEW CHILLER.
5. POWER CONNECTION FOR NEW CHILLER SHALL BE AT THIS END, SAME LOCATION AS DEMOLISHED CHILLER.

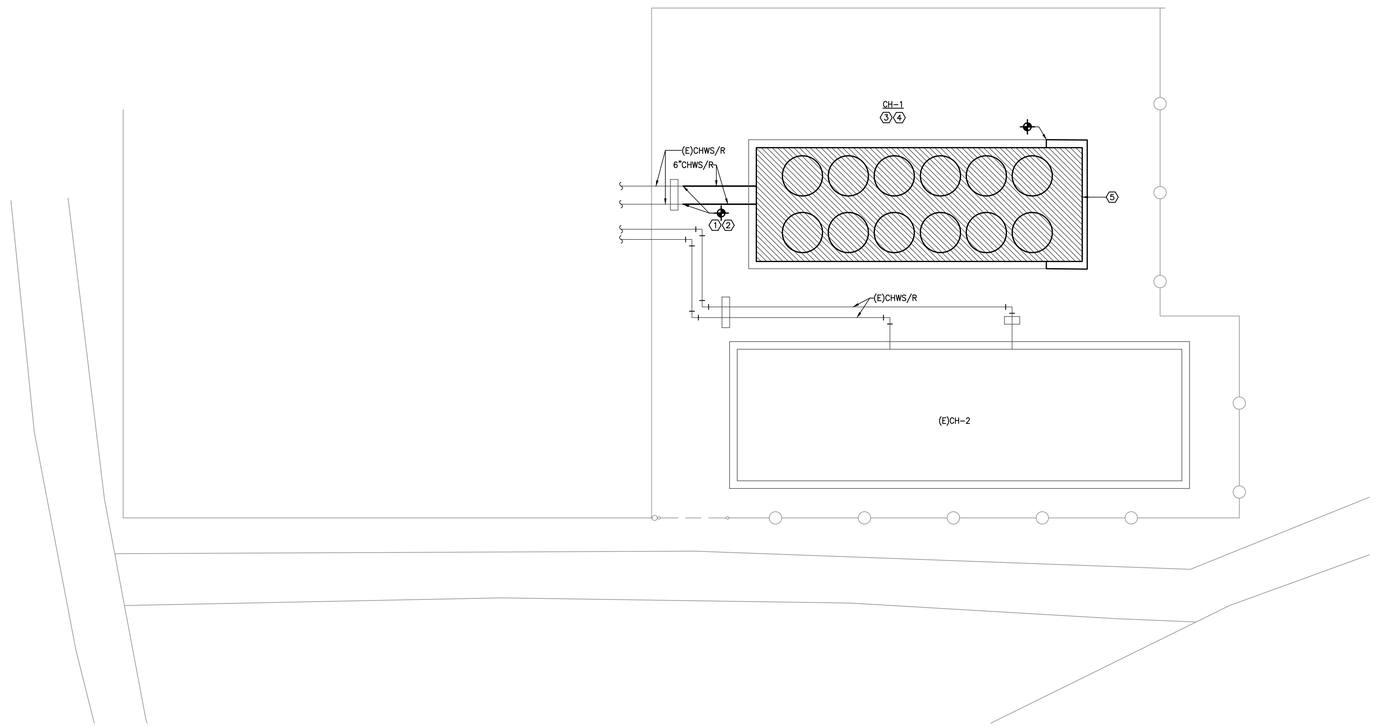

NORTH

1 **MECHANICAL FLOOR PLAN - SMITH MS**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation

STATE OF TEXAS
BRADLEY KALMANS
80219
LICENSED PROFESSIONAL ENGINEER
05-16-2022

MECHANICAL FLOOR PLAN - SMITH MS

M1.1

PACKAGED AIR COOLED SCREW CHILLER

MARK	ACTUAL CAPACITY (TONS)	LEAVING WATER TEMP. (°F)	GPM	MAXIMUM WATER PRESSURE DROP (FT.)	AMBIENT AIR TEMP. (°F)	CURRENT CHARACTERISTIC	REMARKS
CH-1	195	44	479.6	20.0	95.0	460/3/60	1,2,3

GENERAL NOTES:

1. MAXIMUM FOULING FACTOR FOR THE EVAPORATOR IS 0.0001
2. MAINTAIN MINIMUM CLEARANCES REQUIRED BY CHILLER MANUFACTURER FOR PROPER AIRFLOW TO FANS AND UNIT. MAINTAIN MINIMUM CLEARANCE AS REQUIRED TO OPEN ACCESS AND CONTROL DOORS ON EQUIPMENT FOR SERVICE, MAINTENANCE AND INSPECTION. MAINTAIN MIMMUM ELECTRICAL CLEARANCES AS REQUIRED BY NEC.
3. CHILLER SHALL MEET OR EXCEED THE AHRI FULL-LOAD AND PART-LOAD PATH A OR PATH B EFFICIENCIES INDICATED IN THE 2015 IECC.

REMARKS:

1. PROVIDE WITH LOW AMBIENT HEAD PRESSURE CONTROL.
2. PROVIDE WITH INTEGRAL MAIN ELECTRICAL DISCONNECT SWITCH.
3. PROVIDE WITH INSULATION ON ALL SUCTION LINES.

SYMBOL LEGEND

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
GENERAL	
(#)	KEY NOTE TAG
(#)	NOTE SPECIFIC TO DETAIL TAG
A	REVISION TAG
	NEW EQUIPMENT
PIPING	
—D—	CONDENSATE DRAIN LINE
—AD—	AUXILLARY CONDENSATE DRAIN LINE
—RLR—	REFRIGERANT LIQUID & GAS RECIRCULATION LINE (TOTAL OF TWO PIPES, ONLY ONE PIPE SHOWN FOR DRAWING CLARITY)
—RL—	REFRIGERANT LIQUID LINE
—HG—	REFRIGERANT HOT GAS LINE
—RS—	REFRIGERANT SUCTION LINE
	ELBOW UP
	ELBOW DOWN
	90° ELBOW
	45° ELBOW
	TEE
	TEE DOWN
	TEE UP
	TOP BRANCH CONNECTION
	BOTTOM BRANCH CONNECTION
	FLANGE
	CAP
	CONTINUATION
	FLOOR DRAIN (REFER TO PLUMBING DRAWINGS)
	PIPE GUIDE
SUBSCRIPTS AND ABREVIATIONS	
AFF	ABOVE FINISHED FLOOR
BBS	BELOW BOTTOM OF STRUCTURE
BOD	BOTTOM OF DUCT
BOP	BOTTOM OF PIPE
CA	COMBUSTION AIR
CFM	CUBIC FEET PER MINUTE
EA	EXHAUST AIR
FPM	FEET PER MINUTE
NC	NORMALLY CLOSED
NO	NORMALLY OPEN
OA	OUTSIDE AIR
RA	RETURN AIR
SA	SUPPLY AIR
RENOVATIONS	
	POINT OF CONNECTION FROM NEW TO EXISTING
	ITEM TO REMAIN
	ITEM TO BE REMOVED

MS03



MECHANICAL KEYED NOTES

1. CONTRACTOR SHALL FIELD VERIFY EXISTING PIPE SIZES.
2. INSTALL NEW CHILLER ON EXISTING CONCRETE HOUSEKEEPING PAD. EXTEND EXISTING HOUSEKEEPING PAD AS REQUIRED TO ACCOMMODATE NEW CHILLER.
3. PROVIDE ALL OUTDOOR PIPING WITH INSULATION AND ALUMINUM JACKETING AS SPECIFIED.
4. PROVIDE INLINE STRAINER IN VERTICAL PIPE WITH 1" DRAIN LINE.
5. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.
6. BALANCING VALVE TO BE PROVIDED WITH INFINITE POSITION CRANK OR MEMORY STOP FOR BALANCING SERVICE.

3 CHILLED WATER PIPING DIAGRAM

SCALE: NO SCALE



NOTES: 1. SEE TEMPERATURE TEST WELL DETAIL FOR MOUNTING ARRANGEMENTS AND CLEARANCES
2. MOUNT TO BE READABLE FROM FLOOR AT 5'-6" EYE LEVEL (7'-0" MAX.)

2 THERMOMETER INSTALLATION

SCALE: NONE CP009



MECHANICAL KEYED NOTES

1. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.

1 TYPICAL PIPING AT INLET AND OUTLET OF CHILLER

SCALE: NONE

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



MECHANICAL DETAILS AND SCHEDULES - SMITH MS

M2.1

ELECTRICAL KEYED NOTES

1. DISCONNECT & REMOVE EXISTING EQUIPMENT WITH ASSOCIATED DISCONNECT & CONDUCTORS ALL THE WAY BACK TO SOURCE. KEEP EXISTING CONDUSTS IN PLACE TO RUN NEW CONDUCTORS. EXTEND EXISTING CONDUITS TO NEW CHILLER INTEGRAL DISCONNECT LOCATION.
2. DISCONNECT ALL EQUIPMENT CONNECTIONS. KEEP EXISTING CONDUITS IN PLACE FOR CONNECTION OF NEW EQUIPMENT. FIELD VERIFY CIRCUIT(S) ORIGINATION(S).
3. KEEP EXISTING CONTROLS CONDUIT(S) IN PLACE & EXTEND TO NEW CHILLER AS REQUIRED.
4. REMOVE EXISTING DISCONNECT & RETURN TO OWNER. PROVIDE NEW WP PULL BOX PER NEC REQUIREMENTS IN THE SAME LOCATION OF THE REMOVED DISCONNECT.

DEMO SYMBOL LEGEND

RENOVATIONS	
———	EXISTING TO REMAIN EQUIPMENT
– – – –	DISCONNECT & REMOVED EQUIPMENT

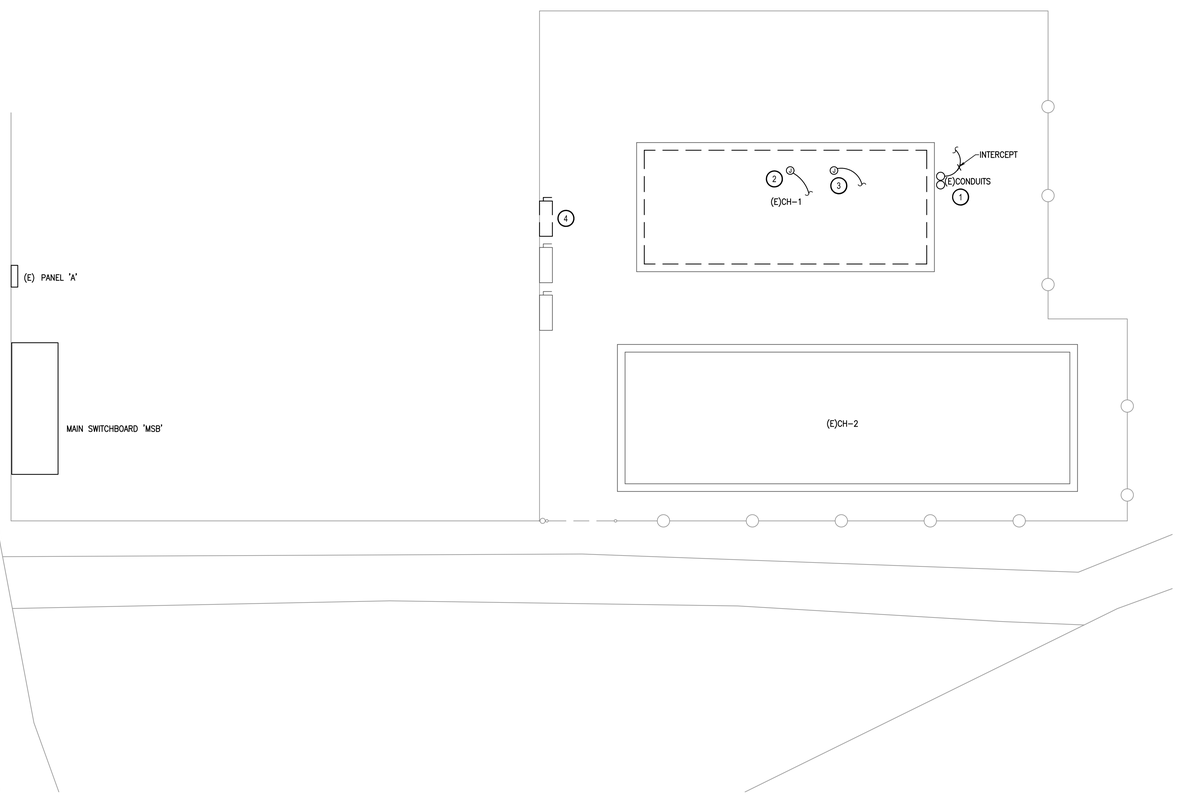

NORTH

1 **ELECTRICAL DEMOLITION FLOOR PLAN - SMITH MS**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: AH
Checked By: JZ
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT
BISD Preparing Our Next Generation

STATE OF TEXAS
BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
05-16-2022

ELECTRICAL DEMOLITION FLOOR PLAN - SMITH MS

E0.1

SYMBOL SCHEDULE

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
LIGHTING (LETTER DENOTES TYPE – SEE LIGHT FIXTURE SCHEDULE)	
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED ON EMERGENCY CIRCUIT
	DOWNLIGHT FIXTURE
	DOWNLIGHT FIXTURE ON EMERGENCY CIRCUIT
	LIGHT FIXTURE – WALL MOUNTED
	LIGHT FIXTURE – WALL MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – CEILING MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – WALL MOUNTED ON EMERGENCY CIRCUIT
LIGHTING CONTROLS & DEVICES	
$	SINGLE POLE SWITCH
$3	3–WAY SWITCH
$4	4–WAY SWITCH
$K	KEYED SWITCH
$D	WALL BOX DIMMER, SIZE AND TYPE AS REQUIRED
$P	PILOT LIGHT SWITCH
$T	6–HOUR ROTARY TIMER SWITCH WITH NO HOLD U.N.O.
	PUSH BUTTON EPO SWITCH (KEY RESET) WITH COVER
$MC	MOMENTARY CONTACT SWITCH
$R	LOW VOLTAGE DIGITAL KEYPAD
$B	BUILDING MANAGEMENT (BMCS) LOCAL OVERRIDE SWITCH
	OCCUPANCY SENSOR (AUTO ON / AUTO OFF WITHIN 20–MINUTES)
	VACANCY SENSOR (MANUAL ON / AUTO OFF WITHIN 10–MINUTES)
	PHOTOCELL SENSOR
LC#	LIGHTING CONTROL SYSTEM. ('#' DENOTES TYPE – SEE LIGHTING CONTROLS SCHEDULE)
ELC	UL924 EMERGENCY LOAD CONTROL RELAY UNLESS NOTED OTHERWISE.
RECEPTACLES AND OUTLETS	
	SIMPLEX RECEPTACLE
	DUPLEX RECEPTACLE
U	DUPLEX RECEPTACLE WITH TWO USB CHARGING PORTS.
	125/250 VOLT, 1 PHASE, 3–WIRE, 20 AMPS UNLESS NOTED OTHERWISE
	DOUBLE DUPLEX IN 2–GANG BOX WITH SINGLE COVER PLATE
U	DOUBLE DUPLEX WITH TWO USB CHARGING PORTS IN 2–GANG BOX WITH SINGLE COVER PLATE
	DOUBLE DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE IN 2–GANG BOX WITH SINGLE COVER PLATE
	DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE
	FLUSH FLOOR DUPLEX RECEPTACLE OUTLET
	FLUSH FLOOR DOUBLE DUPLEX RECEPTACLE OUTLET
	CONCEALED SERVICE MULTI–ACCESS FLOOR BOX WITH DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
	CONCEALED SERVICE MULTI–ACCESS FLOOR BOX WITH DOUBLE DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
	JUNCTION BOX
G	FLUSH REMOTE GFCI DEVICE (LOCATE IN READILY ACCESSIBLE LOCATION)
MOTOR CONTROLLERS AND EQUIPMENT	
	MOTOR, MAKE FINAL MOTOR CONNECTION
$	MOTOR–RATED SWITCH. 20A UNLESS INDICATED OTHERWISE.
	INTEGRAL EQUIPMENT DISCONNECT
	COMBINATION MOTOR STARTER/DISCONNECT SWITCH AS REQUIRED
	MOTOR STARTER
	PREWIRED DEVICE, MAKE ELECTRICAL FINAL CONNECTIONS
VFD	VARIABLE FREQUENCY DRIVE MOTOR CONTROLLER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
HF	HIGH EFFICIENCY HARMONIC FILTER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
T	LOW VOLTAGE TRANSFORMER, SIZE AND TYPE AS REQUIRED.
	CHIME/BUZZER
ELECTRICAL EQUIPMENT	
	ELECTRICAL PANELBOARD; REFER TO FLOOR PLANS FOR VOLTAGE.
	DRY TYPE TRANSFORMER
	PLYWOOD TELEPHONE BACKBOARD
CIRCUITING	
	CONDUIT
	CONDUIT BELOW FLOOR, SLAB, OR GRADE
	3/4"C. UNLESS OTHERWISE NOTED; LONG HATCH, NEUTRAL; SHORT HATCH, PHASE; LONG HATCH & HOOK, INSULATED GROUND. NO HATCHES INDICATES 2 CONDUCTORS. ARROW INDICATES HOMERUN.
	PARTIAL ELECTRICAL HOME RUN
SUBSCRIPTS AND ABBREVIATIONS	
WP	INDICATES 'WEATHERPROOF'
H	INDICATES 'HORIZONTAL'
NL	INDICATES 'NIGHT LIGHT'.
TP	INDICATES 'TAMPER PROOF'
(KS)	INDICATES 'KNEE SPACE'. LOCATE WIRING DEVICE IN KNEESPACE
U.N.O.	INDICATES 'UNLESS NOTED OTHERWISE'
(E)	INDICATES EXISTING TO REMAIN
(R)	INDICATES REPLACE DEVICE AND COVERPLATE.
•	NEXT TO ANY SYMBOL INDICATES FINAL ROUGH–IN FIELD COORDINATION BY CONTRACTOR WITH ARCHITECTURAL MILLWORK DRAWINGS AND OTHER TRADES

GENERAL NOTES:
–ALL EXTERIOR BUILDING ELECTRICAL EQUIPMENT TO BE WEATHERPROOF NEMA–4X MINIMUM.
–ALL EXTERIOR RECEPTACLES SHALL BE WATER RESISTANT TYPE.

ELECTRICAL GENERAL NOTES:

1. ALL EMPTY CONDUIT SHALL HAVE PULL STRING.
2. EACH CONDUIT SHALL BE LIMITED TO (3) CIRCUITS MAXIMUM.
3. ALL EXISTING EQUIPMENT SHALL REMAIN OPERATIONAL.

SYMBOL LEGEND

RENOVATIONS	
	EXISTING TO REMAIN
	NEW

ELECTRICAL KEYED NOTES:

1. CONNECT NEW MECHANICAL EQUIPMENT USING NEW CONDUCTORS BACK IN EXISTING CONDUITS. SEE ONE LINE DIAGRAM. RECONNECT EQUIPMENT ELECTRODE CONDUCTOR. REPLACE GROUNDING ELECTRODE CONDUCTOR WITH NEW, USE #6 CU MINIMUM. PROVIDE NEW GROUNDING RODS AS REQUIRED.
2. RECONNECT ALL EQUIPMENT RELATED CONNECTIONS VIA EXISTING CONDUITS. EXTEND EXISTING CONDUCTORS TO ACCOMMODATE NEW POINT OF CONNECTION AS REQUIRED. PROVIDE ADDITIONAL WP JUNCTION BOXES AS NECESSARY.
3. PROVIDE ADDITIONAL WP JUNCTION BOXES & CONDUITS TO ACCOMMODATE NEW POINT OF EQUIPMENT CONTROLS CONNECTION AS REQUIRED.
4. PROVIDE 3/4"C WITH (2)#10 CU & (1) #10 CU GND TO PANEL. PROVIDE 30A/1P GFIE 30mA BREAKER AT THE PANEL.

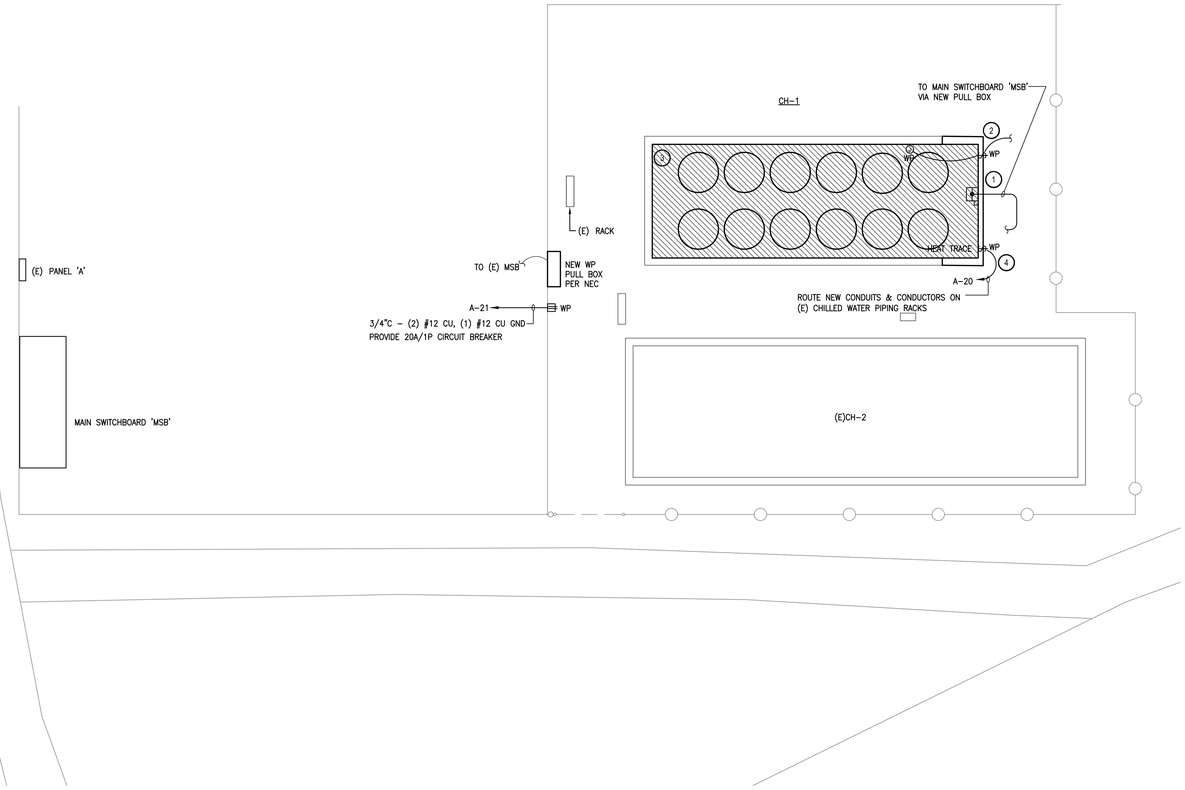

NORTH

1 ELECTRICAL FLOOR PLAN - SMITH MS
SCALE: 1/4" = 1'-0"

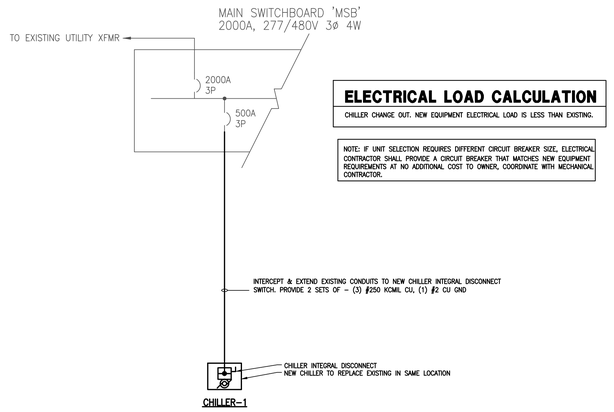

ELECTRICAL LOAD CALCULATION
CHILLER CHANGE OUT. NEW EQUIPMENT ELECTRICAL LOAD IS LESS THAN EXISTING.

NOTE: IF UNIT SELECTION REQUIRES DIFFERENT CIRCUIT BREAKER SIZE, ELECTRICAL CONTRACTOR SHALL PROVIDE A CIRCUIT BREAKER THAT MATCHES NEW EQUIPMENT REQUIREMENTS AT NO ADDITIONAL COST TO OWNER, COORDINATE WITH MECHANICAL CONTRACTOR.

2 PARTIAL ONE-LINE DIAGRAM
SCALE: NONE

Project No: 2022-01678-00
Drawn By: AH
Checked By: JZ
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference.
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



ELECTRICAL FLOOR PLAN -SMITH MS

E1.1

DEMOLITION GENERAL NOTES:

1. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FEILD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.
2. ALL MECHANICAL SYSTEMS SHOWN ON THIS PLAN ARE FROM EXISTING DRAWINGS AND PRELIMINARY FIELD WORK. CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL LOCATIONS AND SIZES OF MECHANICAL SYSTEMS PRIOR TO THE START OF WORK.
3. OWNER SHALL HAVE FIRST RIGHT OF REFUSAL ON ALL HVAC EQUIPMENT BEING REMOVED FROM THIS PROJECT. THIS INCLUDES BUT NOT LIMITED TO INTERNAL COMPONENTS OF CHILLERS, VALVES, AND PIPE STANDS.

DEMO SYMBOL LEGEND

RENOVATIONS	
	ITEM TO REMAIN
	ITEM TO BE REMOVED

DEMOLITION KEYED NOTES:

1. REMOVE EXISTING CHW S/R PIPING AND ASSOCIATED VALVES UP T POINT INDICATED.
2. EXISTING CHW S/R PIPING TO REMAIN.
3. EXISTING AIR COOLED CHILLER SHALL REMAIN.
4. EXISTING AIR COOLED CHILLER SHALL BE REMOVED. EXISTING CONCRETE PAD SHALL REMAIN.
5. EXISTING PIPING SUPPORTS SHALL REMAIN.

BMCS NOTE:
EXISTING CONTROL SYSTEM IS BY AUTOMATED LOGIC. REFER TO BMCS SPECIFICATION FOR MORE INFORMATION.

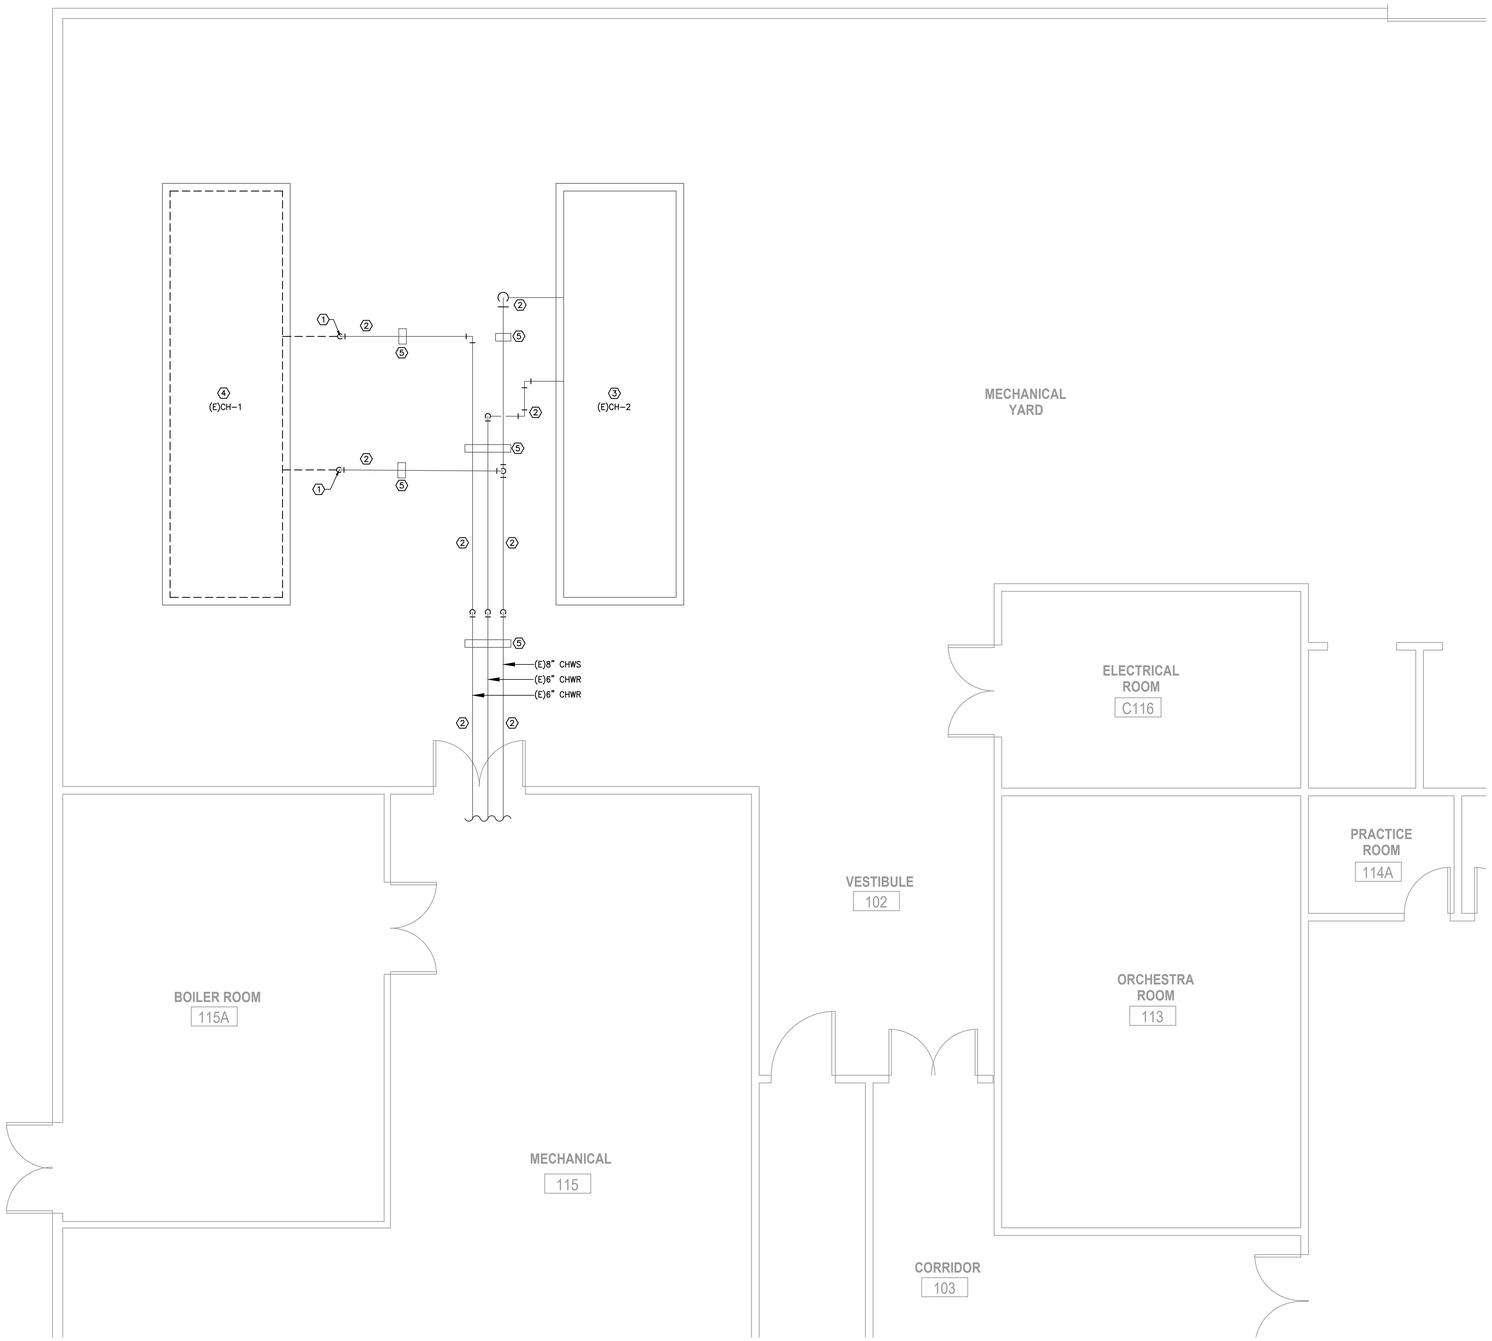

NORTH

1 **MECHANICAL DEMOLITION FLOOR PLAN - SOUTH PARK MS**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT
BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
05-16-2022

MECHANICAL DEMOLITION FLOOR PLAN - SOUTH PARK MS

M0.1

MECHANICAL GENERAL NOTES:

1. MECHANICAL CONTRACTOR SHALL COORDINATE WITH THE ELECTRICAL CONTRACTOR FOR ALL ELECTRICAL POWER REQUIREMENTS.
2. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FIELD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.

MECHANICAL KEYED NOTES:

1. PROVIDE OUTDOOR PIPING INSULATION AS SPECIFIED.
2. PROVIDE NEW CHW S/R PIPING AS SPECIFICED AND CONNECT TO EXISTING PIPING. RE:3/M2.1 FOR PARTIAL PIPING DIAGRAM.
3. VERIFY AIR-COOLED CHILLER SERVICE CLEARANCES WITH MANUFACTURER. COORDINATE WITH OTHER TRADES NOT TO OBSTRUCT.
4. INSTALL NEW CHILLER ON EXISTING CONCRETE PAD. EXTEND EXISTING CONCRETE PAD AS REQUIRED TO ACCOMMODATE THE NEW CHILLER.
5. POWER CONNECTION FOR NEW CHILLER SHALL BE AT THIS END, SAME LOCATION AS DEMOLISHED CHILLER.

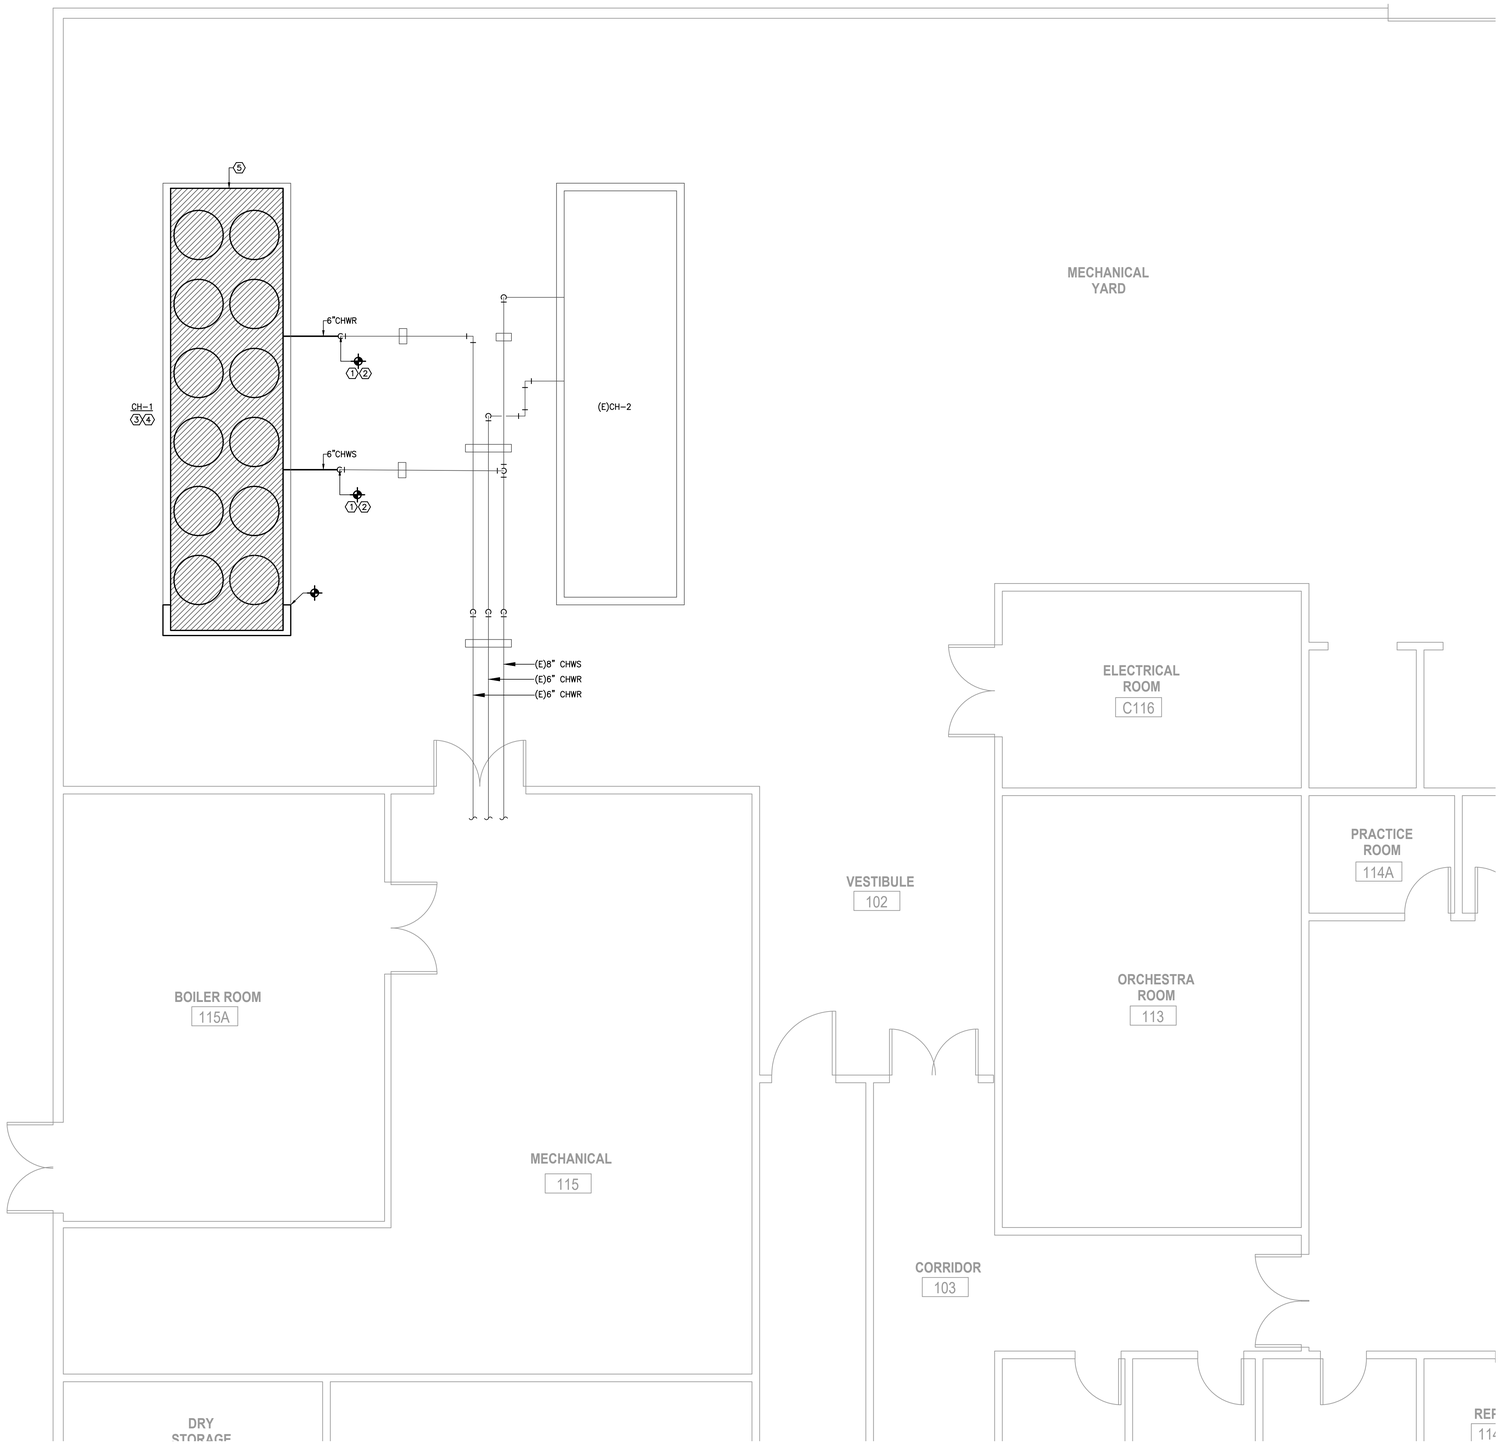

NORTH

1 **MECHANICAL FLOOR PLAN - SOUTH PARK MS**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT
BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED PROFESSIONAL ENGINEER
05-16-2022

MECHANICAL FLOOR PLAN - SOUTH PARK MS

M1.1

PACKAGED AIR COOLED SCREW CHILLER

MARK	ACTUAL CAPACITY (TONS)	LEAVING WATER TEMP. (°F)	GPM	MAXIMUM WATER PRESSURE DROP (FT.)	AMBIENT AIR TEMP. (°F)	CURRENT CHARACTERISTIC	REMARKS
CH-1	279	44	670.0	20.0	95.0	460/3/60	1,2,3,4

GENERAL NOTES:

1. MAXIMUM FOULING FACTOR FOR THE EVAPORATOR IS 0.0001
2. MAINTAIN MINIMUM CLEARANCES REQUIRED BY CHILLER MANUFACTURER FOR PROPER AIRFLOW TO FANS AND UNIT. MAINTAIN MINIMUM CLEARANCE AS REQUIRED TO OPEN ACCESS AND CONTROL DOORS ON EQUIPMENT FOR SERVICE, MAINTENANCE AND INSPECTION. MAINTAIN MINIMUM ELECTRICAL CLEARANCES AS REQUIRED BY NEC.
3. CHILLER SHALL MEET OR EXCEED THE AHRI FULL-LOAD AND PART-LOAD PATH A OR PATH B EFFICIENCIES INDICATED IN THE 2015 IECC.

REMARKS:

1. PROVIDE WITH LOW AMBIENT HEAD PRESSURE CONTROL.
2. PROVIDE WITH INTEGRAL MAIN ELECTRICAL DISCONNECT SWITCH.
3. PROVIDE WITH INSULATION ON ALL SUCTION LINES.
4. NEW CHILLER SHALL HAVE A MAX LENGTH OF 346" (28'-10").

SYMBOL LEGEND

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
GENERAL	
#	KEY NOTE TAG
#	NOTE SPECIFIC TO DETAIL TAG
A	REVISION TAG
	NEW EQUIPMENT
PIPING	
—D—	CONDENSATE DRAIN LINE
—AD—	AUXILLARY CONDENSATE DRAIN LINE
—RLR—	REFRIGERANT LIQUID & GAS RECIRCULATION LINE (TOTAL OF TWO PIPES, ONLY ONE PIPE SHOWN FOR DRAWING CLARITY)
—RL—	REFRIGERANT LIQUID LINE
—HG—	REFRIGERANT HOT GAS LINE
—RS—	REFRIGERANT SUCTION LINE
	ELBOW UP
	ELBOW DOWN
	90° ELBOW
	45° ELBOW
	TEE
	TEE DOWN
	TEE UP
	TOP BRANCH CONNECTION
	BOTTOM BRANCH CONNECTION
	FLANGE
	CAP
	CONTINUATION
	FLOOR DRAIN (REFER TO PLUMBING DRAWINGS)
	PIPE GUIDE
SUBSCRIPTS AND ABREVIATIONS	
AFF	ABOVE FINISHED FLOOR
BBS	BELOW BOTTOM OF STRUCTURE
BOD	BOTTOM OF DUCT
BOP	BOTTOM OF PIPE
CA	COMBUSTION AIR
CFM	CUBIC FEET PER MINUTE
EA	EXHAUST AIR
FPM	FEET PER MINUTE
NC	NORMALLY CLOSED
NO	NORMALLY OPEN
OA	OUTSIDE AIR
RA	RETURN AIR
SA	SUPPLY AIR
RENOVATIONS	
	POINT OF CONNECTION FROM NEW TO EXISTING
	ITEM TO REMAIN
	ITEM TO BE REMOVED

MS03



MECHANICAL KEYED NOTES

1. BALANCING VALVE TO BE PROVIDED WITH INFINITE POSITION CRANK OR MEMORY STOP FOR BALANCING SERVICE.
2. INSTALL NEW CHILLER ON EXISTING CONCRETE HOUSEKEEPING PAD. EXTEND EXISTING HOUSEKEEPING PAD AS REQUIRED TO ACCOMMODATE NEW CHILLER.
3. PROVIDE ALL OUTDOOR PIPING WITH INSULATION AND ALUMINUM JACKETING AS SPECIFIED.
4. PROVIDE INLINE STRAINER IN VERTICAL PIPE WITH 1" DRAIN LINE.
5. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.

3 CHILLED WATER PIPING DIAGRAM



NOTES: 1. SEE TEMPERATURE TEST WELL DETAIL FOR MOUNTING ARRANGEMENTS AND CLEARANCES
2. MOUNT TO BE READABLE FROM FLOOR AT 5'-6" EYE LEVEL (7'-0" MAX.)

2 THERMOMETER INSTALLATION

SCALE: NONE CP009



MECHANICAL KEYED NOTES

1. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.

1 TYPICAL PIPING AT INLET AND OUTLET OF CHILLER

SCALE: NONE

Project No: 2022-01678-00
Drawn By: MR
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
STATE OF TEXAS
05-16-2022

MECHANICAL DETAILS AND SCHEDULES - SOUTH PARK MS

M2.1

SYMBOL SCHEDULE

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
LIGHTING (LETTER DENOTES TYPE – SEE LIGHT FIXTURE SCHEDULE)	
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED ON EMERGENCY CIRCUIT
	DOWNLIGHT FIXTURE
	DOWNLIGHT FIXTURE ON EMERGENCY CIRCUIT
	LIGHT FIXTURE – WALL MOUNTED
	LIGHT FIXTURE – WALL MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – CEILING MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – WALL MOUNTED ON EMERGENCY CIRCUIT
LIGHTING CONTROLS & DEVICES	
$	SINGLE POLE SWITCH
$3	3-WAY SWITCH
$4	4-WAY SWITCH
$K	KEYED SWITCH
$D	WALL BOX DIMMER, SIZE AND TYPE AS REQUIRED
$P	PILOT LIGHT SWITCH
$T	6-HOUR ROTARY TIMER SWITCH WITH NO HOLD U.N.O.
	PUSH BUTTON EPO SWITCH (KEY RESET) WITH COVER
$MC	MOMENTARY CONTACT SWITCH
$R	LOW VOLTAGE DIGITAL KEYPAD
$B	BUILDING MANAGEMENT (BMCS) LOCAL OVERRIDE SWITCH
	OCCUPANCY SENSOR (AUTO ON / AUTO OFF WITHIN 20-MINUTES)
	VACANCY SENSOR (MANUAL ON / AUTO OFF WITHIN 10-MINUTES)
	PHOTOCELL SENSOR
LC#	LIGHTING CONTROL SYSTEM. ('#' DENOTES TYPE – SEE LIGHTING CONTROLS SCHEDULE)
ERC	UL924 EMERGENCY LOAD CONTROL RELAY UNLESS NOTED OTHERWISE.
RECEPTACLES AND OUTLETS	
	SIMPLEX RECEPTACLE
	DUPLEX RECEPTACLE
U	DUPLEX RECEPTACLE WITH TWO USB CHARGING PORTS.
	125/250 VOLT, 1 PHASE, 3-WIRE, 20 AMPS UNLESS NOTED OTHERWISE
	DOUBLE DUPLEX IN 2-GANG BOX WITH SINGLE COVER PLATE
U	DOUBLE DUPLEX WITH TWO USB CHARGING PORTS IN 2-GANG BOX WITH SINGLE COVER PLATE
	DOUBLE DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE IN 2-GANG BOX WITH SINGLE COVER PLATE
	DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE
	FLUSH FLOOR DUPLEX RECEPTACLE OUTLET
	FLUSH FLOOR DOUBLE DUPLEX RECEPTACLE OUTLET
	CONCEALED SERVICE MULTI-ACCESS FLOOR BOX WITH DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
	CONCEALED SERVICE MULTI-ACCESS FLOOR BOX WITH DOUBLE DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
	JUNCTION BOX
	FLUSH REMOTE GFCI DEVICE (LOCATE IN READILY ACCESSIBLE LOCATION)
MOTOR CONTROLLERS AND EQUIPMENT	
	MOTOR, MAKE FINAL MOTOR CONNECTION
$	MOTOR-RATED SWITCH. 20A UNLESS INDICATED OTHERWISE.
	INTEGRAL EQUIPMENT DISCONNECT
	COMBINATION MOTOR STARTER/DISCONNECT SWITCH AS REQUIRED
	MOTOR STARTER
	PREWIRED DEVICE, MAKE ELECTRICAL FINAL CONNECTIONS
VFD	VARIABLE FREQUENCY DRIVE MOTOR CONTROLLER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
HF	HIGH EFFICIENCY HARMONIC FILTER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
T	LOW VOLTAGE TRANSFORMER, SIZE AND TYPE AS REQUIRED.
	CHIME/BUZZER
ELECTRICAL EQUIPMENT	
	ELECTRICAL PANELBOARD; REFER TO FLOOR PLANS FOR VOLTAGE.
	DRY TYPE TRANSFORMER
	PLYWOOD TELEPHONE BACKBOARD
CIRCUITING	
	CONDUIT
	CONDUIT BELOW FLOOR, SLAB, OR GRADE
	3/4"C. UNLESS OTHERWISE NOTED; LONG HATCH, NEUTRAL; SHORT HATCH, PHASE; LONG HATCH & HOOK, INSULATED GROUND. NO HATCHES INDICATES 2 CONDUCTORS. ARROW INDICATES HOMERUN.
	PARTIAL ELECTRICAL HOME RUN
SUBSCRIPTS AND ABBREVIATIONS	
WP	INDICATES 'WEATHERPROOF'
H	INDICATES 'HORIZONTAL'
NL	INDICATES 'NIGHT LIGHT'.
TP	INDICATES 'TAMPER PROOF'
(KS)	INDICATES 'KNEE SPACE'. LOCATE WIRING DEVICE IN KNEESPACE
U.N.O.	INDICATES 'UNLESS NOTED OTHERWISE'
(E)	INDICATES EXISTING TO REMAIN
(R)	INDICATES REPLACE DEVICE AND COVERPLATE.
•	NEXT TO ANY SYMBOL INDICATES FINAL ROUGH-IN FIELD COORDINATION BY CONTRACTOR WITH ARCHITECTURAL MILLWORK DRAWINGS AND OTHER TRADES

GENERAL NOTES:

-ALL EXTERIOR BUILDING ELECTRICAL EQUIPMENT TO BE WEATHERPROOF NEMA-4X MINIMUM.
-ALL EXTERIOR RECEPTACLES SHALL BE WATER RESISTANT TYPE.

ELECTRICAL GENERAL NOTES:

1. ALL EMPTY CONDUIT SHALL HAVE PULL STRING.
2. EACH CONDUIT SHALL BE LIMITED TO (3) CIRCUITS MAXIMUM.
3. ALL EXISTING EQUIPMENT SHALL REMAIN OPERATIONAL.

ELECTRICAL KEYED NOTES

1. DISCONNECT & REMOVE EXISTING EQUIPMENT WITH ASSOCIATED DISCONNECT & CONDUCTORS ALL THE WAY BACK TO SOURCE. KEEP EXISTING CONDUIT IN PLACE TO RUN NEW CONDUCTORS. EXTEND EXISTING CONDUITS TO NEW CHILLER INTEGRAL DISCONNECT LOCATION.
2. DISCONNECT ALL EQUIPMENT ELECTRICAL CONNECTIONS. KEEP EXISTING CONDUITS IN PLACE FOR CONNECTION OF NEW EQUIPMENT. FIELD VERIFY CIRCUIT(S) ORIGINATION(S).
3. KEEP EXISTING CONTROLS CONDUIT(S) IN PLACE & EXTEND TO NEW CHILLER AS REQUIRED.
4. REMOVE EXISTING DISCONNECT. RETURN TO OWNER.

DEMO SYMBOL LEGEND

RENOVATIONS	
	EXISTING TO REMAIN EQUIPMENT
- - - -	DISCONNECT & REMOVED EQUIPMENT

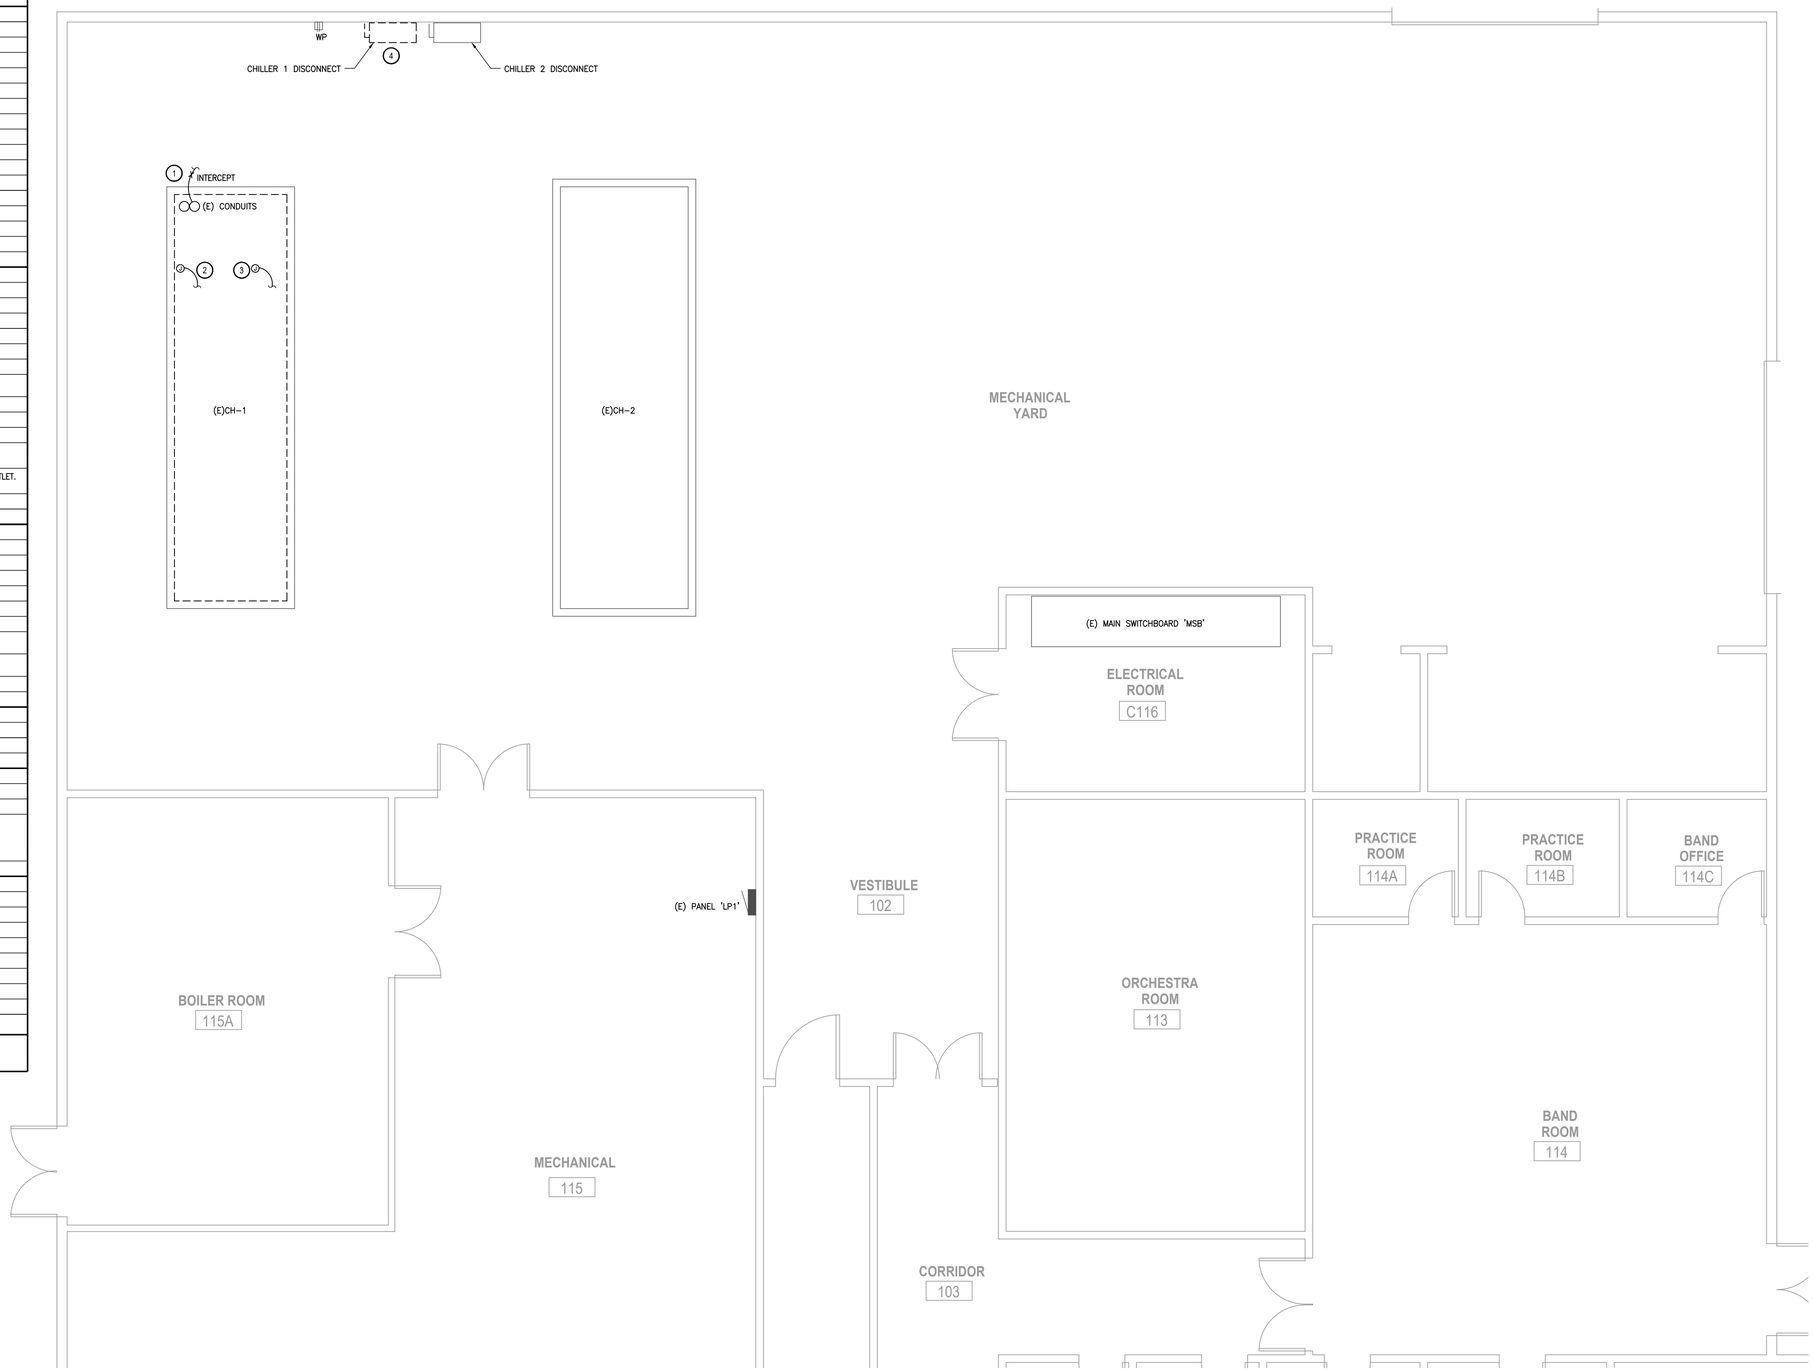

NORTH

1 **ELECTRICAL FLOOR PLAN - SOUTH PARK MS**
SCALE: 1/4" = 1'-0"

Project No:	2022-01678-00
Drawn By:	AH
Checked By:	JZ
Date:	05-16-2022
Revision Dates:	

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



ELECTRICAL DEMOLITION FLOOR PLAN - SOUTH PARK MS

E0.1

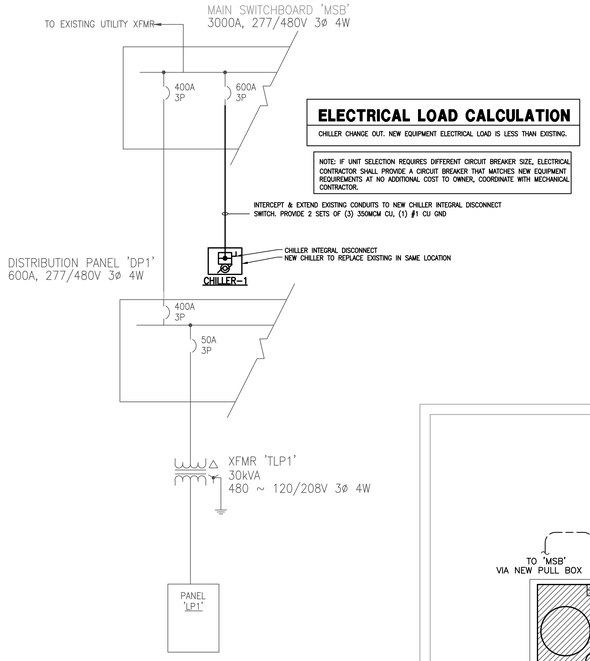

2 PARTIAL ONE-LINE DIAGRAM
SCALE: NONE

ELECTRICAL LOAD CALCULATION

CHILLER CHANGE OUT. NEW EQUIPMENT ELECTRICAL LOAD IS LESS THAN EXISTING.

NOTE: IF UNIT SELECTION REQUIRES DIFFERENT CIRCUIT BREAKER SIZE, ELECTRICAL CONTRACTOR SHALL PROVIDE A CIRCUIT BREAKER THAT MATCHES NEW EQUIPMENT REQUIREMENTS AT NO ADDITIONAL COST TO OWNER, COORDINATE WITH MECHANICAL CONTRACTOR.

SYMBOL LEGEND

RENOVATIONS	
	EXISTING TO REMAIN
	NEW

ELECTRICAL KEYED NOTES:

1. CONNECT NEW MECHANICAL EQUIPMENT USING NEW CONDUCTORS BACK IN EXISTING CONDUITS. SEE ONE LINE DIAGRAM. RECONNECT EQUIPMENT GROUND. REPLACE GROUNDING CONDUCTOR WITH NEW. NEW GROUNDING CONDUCTOR SIZE SHALL MATCH EXISTING.
2. RECONNECT ALL EQUIPMENT RELATED CONNECTIONS VIA EXISTING CONDUITS & CONDUCTORS. EXTEND EXISTING CONDUITS & CONDUCTORS TO ACCOMMODATE NEW POINT OF CONNECTION AS REQUIRED. PROVIDE ADDITIONAL WP JUNCTION BOXESAS NECESSARY.
3. PROVIDE ADDITIONAL WP JUNCTION BOXES & CONDUITS TO ACCOMMODATE NEW POINT OF EQUIPMENT CONTROLS CONNECTION AS REQUIRED.
4. PROVIDE 3/4"C WITH (2)#10 CU & (1) #10 CU GND TO PANEL. PROVIDE 30A/1P GFE 30mA BREAKER AT THE PANEL.
5. NEW WP PULL BOX IN SAME LOCATION AS REMOVED DISCONNECT. PROVIDE NEW PULL BOX PER NEC.

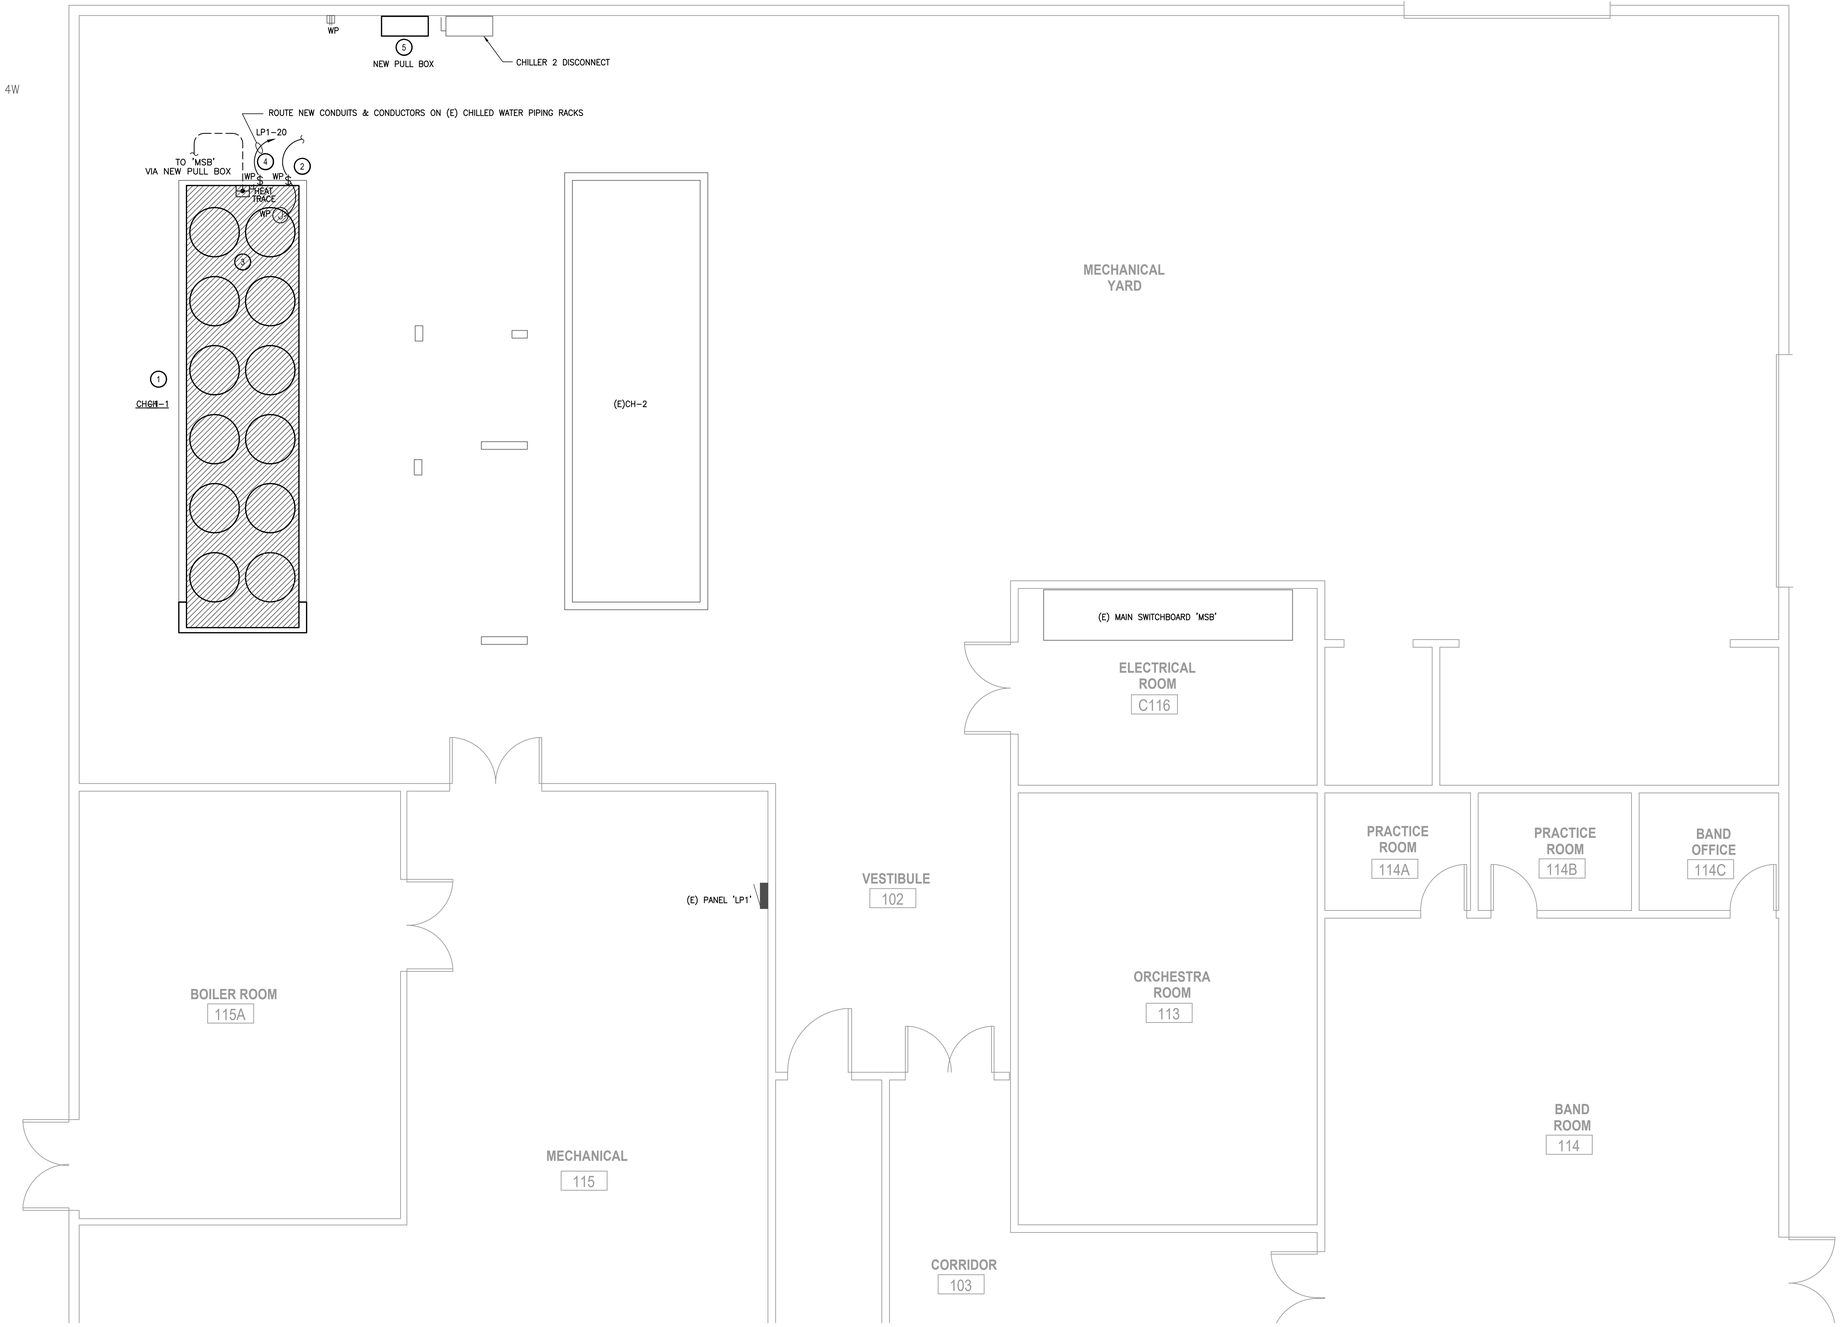

NORTH

1 ELECTRICAL FLOOR PLAN - SOUTH PARK MS
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: AH
Checked By: JZ
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT
BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED PROFESSIONAL ENGINEER
05-16-2022

ELECTRICAL FLOOR PLAN - SOUTH PARK MS

E1.1

DEMOLITION GENERAL NOTES:

1. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FEILD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.
2. ALL MECHANICAL SYSTEMS SHOWN ON THIS PLAN ARE FROM EXISTING DRAWINGS AND PRELIMINARY FIELD WORK. CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL LOCATIONS AND SIZES OF MECHANICAL SYSTEMS PRIOR TO THE START OF WORK.
3. OWNER SHALL HAVE FIRST RIGHT OF REFUSAL ON ALL HVAC EQUIPMENT BEING REMOVED FROM THIS PROJECT. THIS INCLUDES BUT NOT LIMITED TO INTERNAL COMPONENTS OF CHILLERS, VALVES, AND PIPE STANDS.

DEMOLITION KEYED NOTES:

1. REMOVE EXISTING CHW S/R PIPING AND ASSOCIATED VALVES UP TO POINT INDICATED. CONTRACTOR SHALL VERIFY EXISTING PIPE SIZE BEFORE DEMOLISHING.
2. EXISTING CHW S/R PIPING TO REMAIN.
3. EXISTING PUMP, CONCRETE PAD, AND ALL ASSOCIATED APPURTENANCES SHALL REMAIN.
4. EXISTING AIR COOLED CHILLER SHALL BE REMOVED. EXISTING CONCRETE PAD SHALL REMAIN.
5. EXISTING AIR COOLED CHILLER AND ASSOCIATED CONCRETE HOUSEKEEPING PAD SHALL REMAIN.
6. EXISTING EXPANSION TANK, PIPING, AND ALL ASSOCIATED APPURTENANCES SHALL REMAIN.
7. EXISTING CHEMICAL FEEDER, PIPING, AND ALL ASSOCIATED APPURTENANCES SHALL REMAIN.
8. EXISTING AIR SEPARATOR, PIPING, AND ALL ASSOCIATED APPURTENANCES SHALL REMAIN.
9. EXISTING BOILER SHALL REMAIN.
10. EXISTING PIPING SUPPORTS SHALL REMAIN. (TYPICAL)

BMCS NOTE:
EXISTING CONTROL SYSTEM IS BY AUTOMATED LOGIC. REFER TO BMCS SPECIFICATION FOR MORE INFORMATION.

DEMO SYMBOL LEGEND	
RENOVATIONS	
	ITEM TO REMAIN
	ITEM TO BE REMOVED

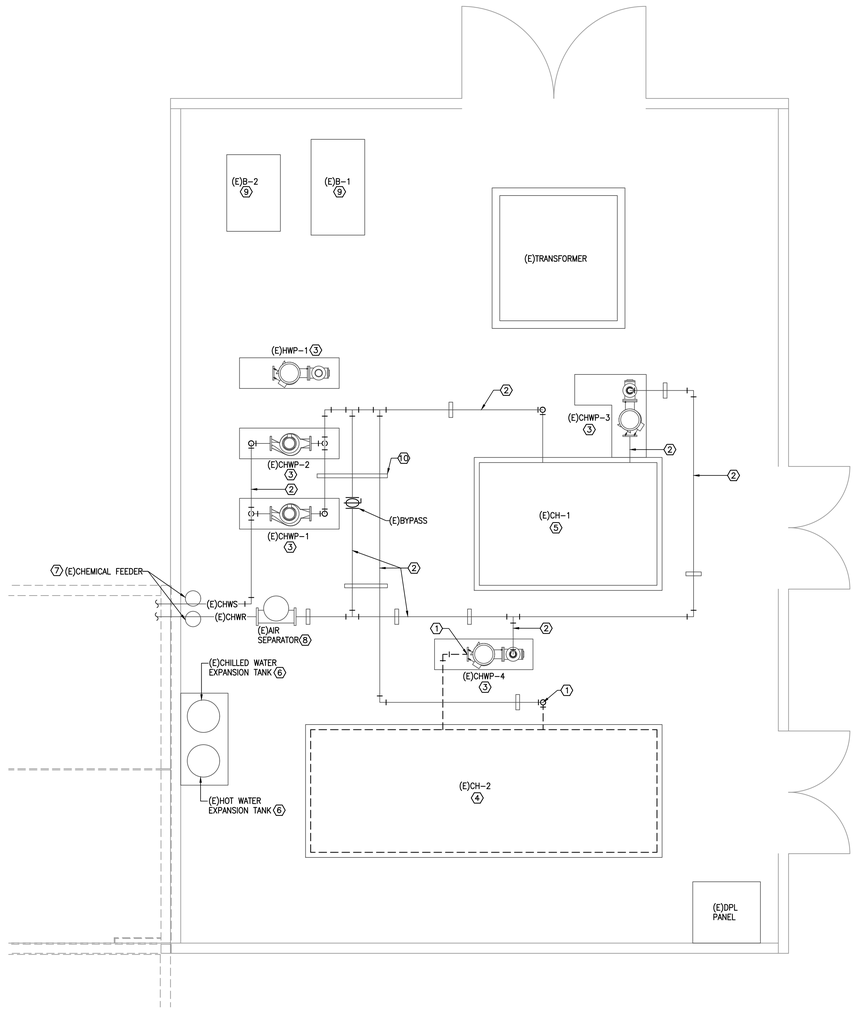

1 **MECHANICAL DEMOLITION FLOOR PLAN - WESTBROOK HS**
SCALE: 1/4" = 1'-0"

Project No:	2022-01678-00
Drawn By:	BB
Checked By:	VP
Date:	05-16-2022
Revision Dates:	

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



05-16-2022

MECHANICAL
DEMOLITION FLOOR
PLAN - WESTBROOK HS

M0.1

MECHANICAL GENERAL NOTES:

1. MECHANICAL CONTRACTOR SHALL COORDINATE WITH THE ELECTRICAL CONTRACTOR FOR ALL ELECTRICAL POWER REQUIREMENTS.
2. THESE CONSTRUCTION DRAWINGS ARE DIAGRAMMATIC, AND DO NOT NECESSARILY REFLECT ACTUAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO FIELD-VERIFY ALL DIMENSIONS AND COORDINATE PLACEMENT OF ALL EQUIPMENT AND ROUTING OF ALL PIPING AND/OR DUCT SYSTEMS.

MECHANICAL KEYED NOTES:

1. INSULATE AND PROVIDE ALUMINUM JACKETING ON OUTDOOR PIPING. REFER TO SPECIFICATIONS.
2. PROVIDE NEW CHW S/R PIPING AT EXISTING SIZE AND CONNECT TO EXISTING PIPING. RE:3/M2.1 FOR PARTIAL PIPING DIAGRAM.
3. VERIFY AIRFLOW AND SERVICE CLEARANCES WITH MANUFACTURER. COORDINATE WITH OTHER TRADES NOT TO OBSTRUCT.
4. INSTALL NEW CHILLER ON EXISTING CONCRETE PAD. EXTEND EXISTING CONCRETE PAD AS REQUIRED TO ACCOMMODATE NEW CHILLER.
5. POWER CONNECTION FOR NEW CHILLER SHALL BE AT THIS END, SAME LOCATION AS DEMOLISHED CHILLER.

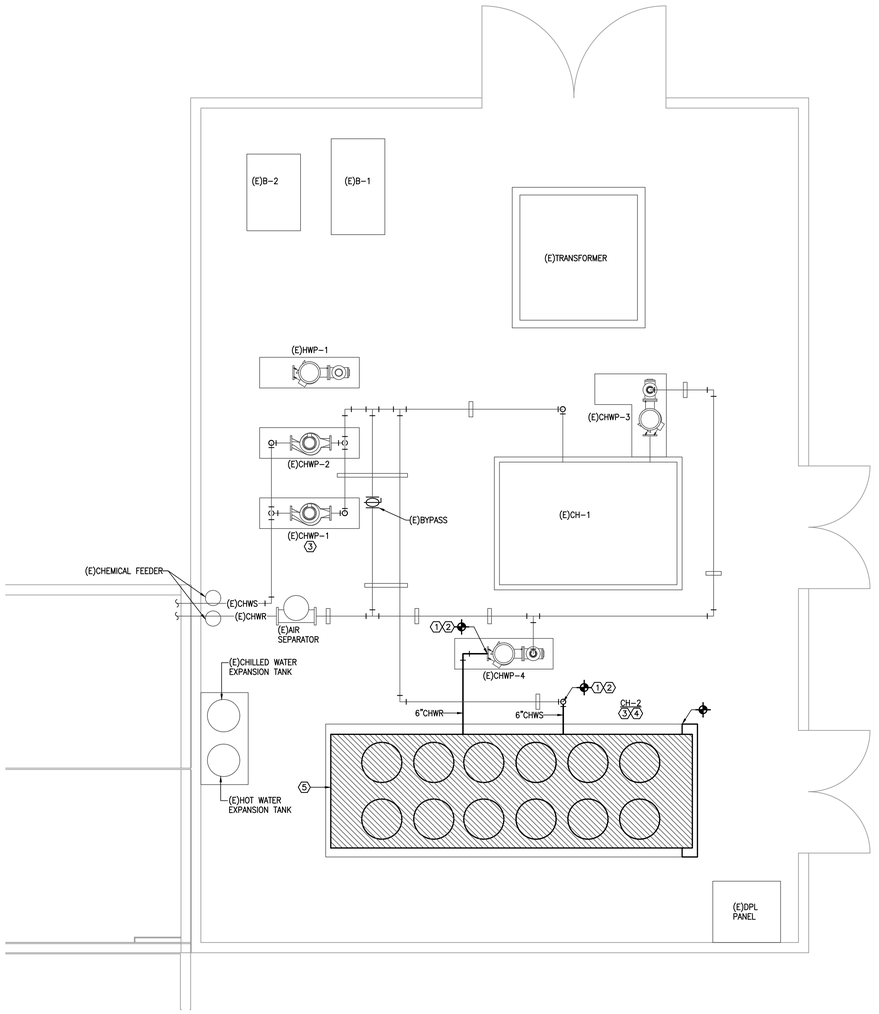

NORTH

1 **MECHANICAL FLOOR PLAN - WESTBROOK HS**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: BB
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



MECHANICAL FLOOR PLAN - WESTBROOK HS

M1.1

PACKAGED AIR COOLED SCREW CHILLER

MARK	ACTUAL CAPACITY (TONS)	LEAVING WATER TEMP. (°F)	GPM	MAXIMUM WATER PRESSURE DROP (FT.)	AMBIENT AIR TEMP. (°F)	CURRENT CHARACTERISTIC	REMARKS
CH-2	182	44	360.0	20.0	95.0	230/3/60	1,2,3

GENERAL NOTES:

1. MAXIMUM FOULING FACTOR FOR THE EVAPORATOR IS 0.0001
2. MAINTAIN MINIMUM CLEARANCES REQUIRED BY CHILLER MANUFACTURER FOR PROPER AIRFLOW TO FANS AND UNIT. MAINTAIN MINIMUM CLEARANCE AS REQUIRED TO OPEN ACCESS AND CONTROL DOORS ON EQUIPMENT FOR SERVICE, MAINTENANCE AND INSPECTION. MAINTAIN MIMIMUM ELECTRICAL CLEARANCES AS REQUIRED BY NEC.
3. CHILLER SHALL MEET OR EXCEED THE AHRI FULL-LOAD AND PART-LOAD PATH A OR PATH B EFFICIENCIES INDICATED IN THE 2015 IECC.

REMARKS:

1. PROVIDE WITH LOW AMBIENT HEAD PRESSURE CONTROL.
2. PROVIDE WITH INTEGRAL MAIN ELECTRICAL DISCONNECT SWITCH.
3. PROVIDE WITH INSULATION ON ALL SUCTION LINES.

SYMBOL LEGEND

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
GENERAL	
#	KEY NOTE TAG
#	NOTE SPECIFIC TO DETAIL TAG
1	REVISION TAG
	NEW EQUIPMENT
PIPING	
—D—	CONDENSATE DRAIN LINE
—AD—	AUXILLARY CONDENSATE DRAIN LINE
—RLR—	REFRIGERANT LIQUID & GAS RECIRCULATION LINE (TOTAL OF TWO PIPES, ONLY ONE PIPE SHOWN FOR DRAWING CLARITY)
—RL—	REFRIGERANT LIQUID LINE
—HG—	REFRIGERANT HOT GAS LINE
—RS—	REFRIGERANT SUCTION LINE
	ELBOW UP
	ELBOW DOWN
	90° ELBOW
	45° ELBOW
	TEE
	TEE DOWN
	TEE UP
	TOP BRANCH CONNECTION
	BOTTOM BRANCH CONNECTION
	FLANGE
	CAP
	CONTINUATION
	FLOOR DRAIN (REFER TO PLUMBING DRAWINGS)
	PIPE GUIDE
SUBSCRIPTS AND ABREVIATIONS	
AFF	ABOVE FINISHED FLOOR
BBS	BELOW BOTTOM OF STRUCTURE
BOD	BOTTOM OF DUCT
BOP	BOTTOM OF PIPE
CA	COMBUSTION AIR
CFM	CUBIC FEET PER MINUTE
EA	EXHAUST AIR
FPM	FEET PER MINUTE
NC	NORMALLY CLOSED
NO	NORMALLY OPEN
OA	OUTSIDE AIR
RA	RETURN AIR
SA	SUPPLY AIR
RENOVATIONS	
	POINT OF CONNECTION FROM NEW TO EXISTING
	ITEM TO REMAIN
	ITEM TO BE REMOVED

MS03



MECHANICAL KEYED NOTES

1. CONTRACTOR SHALL FIELD VERIFY EXISTING PIPE SIZES.
2. INSTALL NEW CHILLER ON EXISTING CONCRETE HOUSEKEEPING PAD. EXTEND EXISTING HOUSEKEEPING PAD AS REQUIRED TO ACCOMMODATE NEW CHILLER.
3. PROVIDE ALL OUTDOOR PIPING WITH INSULATION AND ALUMINUM JACKETING AS SPECIFIED.
4. PROVIDE INLINE STRAINER IN VERTICAL PIPE WITH 1" DRAIN LINE.
5. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.
6. BALANCING VALVE TO BE PROVIDED WITH INFINITE POSITION CRANK OR MEMORY STOP FOR BALANCING SERVICE.

3 CHILLED WATER PIPING DIAGRAM

SCALE: NO SCALE



2 THERMOMETER INSTALLATION

SCALE: NONE CP009



MECHANICAL KEYED NOTES

1. PROVIDE BALL VALVE WITH HOSE THREAD ADAPTER.

1 TYPICAL PIPING AT INLET AND OUTLET OF CHILLER

SCALE: NONE

Project No: 2022-01678-00
Drawn By: BB
Checked By: VP
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference

10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



MECHANICAL DETAILS AND SCHEDULES - WESTBROOK HS

M2.1

ELECTRICAL KEYED NOTES

1. DISCONNECT & REMOVE EXISTING EQUIPMENT WITH ASSOCIATED CONDUCTORS ALL THE WAY BACK TO SOURCE. KEEP EXISTING CONDUIT IN PLACE TO RUN NEW CONDUCTORS. EXTEND EXISTING CONDUITS TO NEW CHILLER INTEGRAL DISCONNECT LOCATION.
2. DISCONNECT ALL EQUIPMENT CONNECTIONS. KEEP EXISTING CONDUITS & CONDUCTORS IN PLACE FOR CONNECTION OF NEW EQUIPMENT. FIELD VERIFY CIRCUIT(S) ORIGINATION(S).
3. KEEP EXISTING CONTROLS CONDUITS IN PLACE & EXTEND TO NEW CHILLER AS REQUIRED.
4. DISCONNECT & REMOVE EXISTING EQUIPMENT MOUNTED RECEPTACLE.

DEMO SYMBOL LEGEND

RENOVATIONS	
———	EXISTING TO REMAIN EQUIPMENT
— — — —	DISCONNECT & REMOVED EQUIPMENT

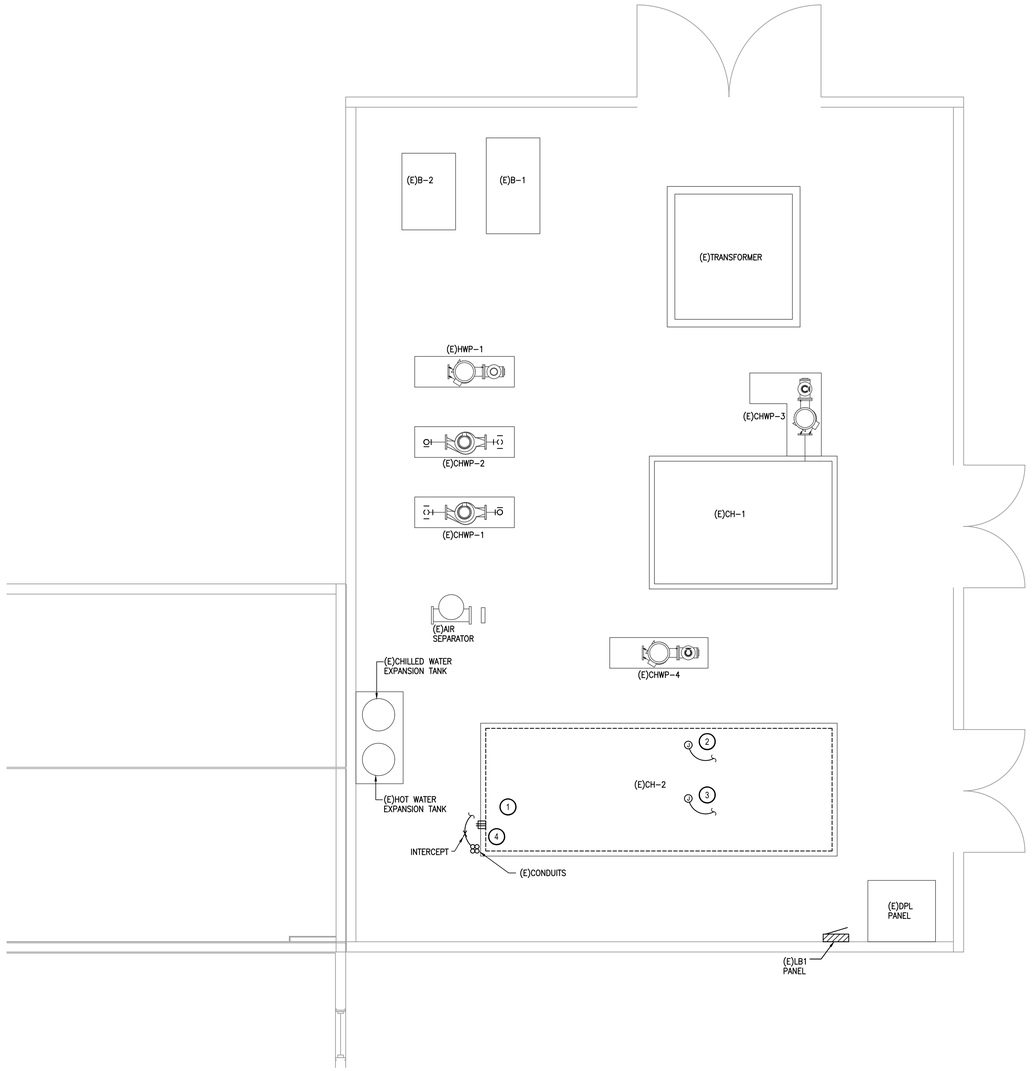

1 **ELECTRICAL FLOOR PLAN - WESTBROOK HS**
SCALE: 1/4" = 1'-0"

Project No: 2022-01678-00
Drawn By: AH
Checked By: JZ
Date: 05-16-2022
Revision Dates:

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT

BISD Preparing Our Next Generation



ELECTRICAL
DEMOLITION FLOOR
PLAN - WESTBROOK HS

E0.1

SYMBOL SCHEDULE

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
LIGHTING (LETTER DENOTES TYPE – SEE LIGHT FIXTURE SCHEDULE)	
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED
	LIGHT FIXTURE – RECESSED OR SURFACE MOUNTED ON EMERGENCY CIRCUIT
	DOWNLIGHT FIXTURE
	DOWNLIGHT FIXTURE ON EMERGENCY CIRCUIT
	LIGHT FIXTURE – WALL MOUNTED
	LIGHT FIXTURE – WALL MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – CEILING MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT – WALL MOUNTED ON EMERGENCY CIRCUIT
LIGHTING CONTROLS & DEVICES	
$	SINGLE POLE SWITCH
$3	3–WAY SWITCH
$4	4–WAY SWITCH
$K	KEYED SWITCH
$D	WALL BOX DIMMER, SIZE AND TYPE AS REQUIRED
$P	PILOT LIGHT SWITCH
$T	6–HOUR ROTARY TIMER SWITCH WITH NO HOLD U.N.O.
	PUSH BUTTON EPO SWITCH (KEY RESET) WITH COVER
$MC	MOMENTARY CONTACT SWITCH
$R	LOW VOLTAGE DIGITAL KEYPAD
$B	BUILDING MANAGEMENT (BMCS) LOCAL OVERRIDE SWITCH
	OCCUPANCY SENSOR (AUTO ON / AUTO OFF WITHIN 20–MINUTES)
	VACANCY SENSOR (MANUAL ON / AUTO OFF WITHIN 10–MINUTES)
	PHOTOCELL SENSOR
RJ	LIGHTING CONTROL SYSTEM. ('J' DENOTES TYPE – SEE LIGHTING CONTROLS SCHEDULE)
ERC	UL924 EMERGENCY LOAD CONTROL RELAY UNLESS NOTED OTHERWISE.
RECEPTACLES AND OUTLETS	
	SIMPLEX RECEPTACLE
	DUPLEX RECEPTACLE
U	DUPLEX RECEPTACLE WITH TWO USB CHARGING PORTS.
	125/250 VOLT, 1 PHASE, 3–WIRE, 20 AMPS UNLESS NOTED OTHERWISE
	DOUBLE DUPLEX IN 2–GANG BOX WITH SINGLE COVER PLATE
U	DOUBLE DUPLEX WITH TWO USB CHARGING PORTS IN 2–GANG BOX WITH SINGLE COVER PLATE
	DOUBLE DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE IN 2–GANG BOX WITH SINGLE COVER PLATE
	DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE
	FLUSH FLOOR DUPLEX RECEPTACLE OUTLET
	FLUSH FLOOR DOUBLE DUPLEX RECEPTACLE OUTLET
D	CONCEALED SERVICE MULTI–ACCESS FLOOR BOX WITH DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
D	CONCEALED SERVICE MULTI–ACCESS FLOOR BOX WITH DOUBLE DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
	JUNCTION BOX
G	FLUSH REMOTE GFCI DEVICE (LOCATE IN READILY ACCESSIBLE LOCATION)
MOTOR CONTROLLERS AND EQUIPMENT	
	MOTOR, MAKE FINAL MOTOR CONNECTION
$	MOTOR–RATED SWITCH. 20A UNLESS INDICATED OTHERWISE.
J	INTEGRAL EQUIPMENT DISCONNECT
J	COMBINATION MOTOR STARTER/DISCONNECT SWITCH AS REQUIRED
	MOTOR STARTER
	PREWIRED DEVICE, MAKE ELECTRICAL FINAL CONNECTIONS
VFD	VARIABLE FREQUENCY DRIVE MOTOR CONTROLLER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
HF	HIGH EFFICIENCY HARMONIC FILTER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
	LOW VOLTAGE TRANSFORMER, SIZE AND TYPE AS REQUIRED.
	CHIME/BUZZER
ELECTRICAL EQUIPMENT	
	ELECTRICAL PANELBOARD; REFER TO FLOOR PLANS FOR VOLTAGE.
	DRY TYPE TRANSFORMER
	PLYWOOD TELEPHONE BACKBOARD
CIRCUITING	
	CONDUIT
	CONDUIT BELOW FLOOR, SLAB, OR GRADE
	3/4"C. UNLESS OTHERWISE NOTED; LONG HATCH, NEUTRAL; SHORT HATCH, PHASE; LONG HATCH & HOOK, INSULATED GROUND. NO HATCHES INDICATES 2 CONDUCTORS. ARROW INDICATES HOMERUN.
	PARTIAL ELECTRICAL HOME RUN
SUBSCRIPTS AND ABBREVATIONS	
WP	INDICATES 'WEATHERPROOF'
H	INDICATES 'HORIZONTAL'
NL	INDICATES 'NIGHT LIGHT'.
TP	INDICATES 'TAMPER PROOF'
(KS)	INDICATES 'KNEE SPACE'. LOCATE WIRING DEVICE IN KNEESPACE
U.N.O.	INDICATES 'UNLESS NOTED OTHERWISE'
(E)	INDICATES EXISTING TO REMAIN
(R)	INDICATES REPLACE DEVICE AND COVERPLATE.
•	NEXT TO ANY SYMBOL INDICATES FINAL ROUGH–IN FIELD COORDINATION BY CONTRACTOR WITH ARCHITECTURAL MILLWORK DRAWINGS AND OTHER TRADES

GENERAL NOTES:
–ALL EXTERIOR BUILDING ELECTRICAL EQUIPMENT TO BE WEATHERPROOF NEMA–4X MINIMUM.
–ALL EXTERIOR RECEPTACLES SHALL BE WATER RESISTANT TYPE.

ELECTRICAL GENERAL NOTES:

1. ALL EMPTY CONDUIT SHALL HAVE PULL STRING.
2. EACH CONDUIT SHALL BE LIMITED TO (3) CIRCUITS MAXIMUM.
3. ALL EXISTING EQUIPMENT SHALL REMAIN OPERATIONAL.

ELECTRICAL KEYED NOTES:

1. CONNECT NEW MECHANICAL EQUIPMENT USING NEW CONDUCTORS BACK IN EXISTING CONDUITS. SEE ONE LINE DIAGRAM. RECONNECT EQUIPMENT ELECTRODE CONDUCTOR. REPLACE ELECTRODE CONDUCTOR WITH NEW, USE #6 CU MINIMUM. PROVIDE GROUNDING RODS ARE REQUIRED.
2. RECONNECT ALL EQUIPMENT RELATED CONNECTIONS VIA EXISTING CONDUITS. EXTEND EXISTING CONDUITS TO ACCOMMODATE NEW POINT OF CONNECTION AS REQUIRED. PROVIDE ADDITIONAL MP JUNCTION BOXES & CONDUITS AS NECESSARY.
3. PROVIDE ADDITIONAL MP JUNCTION BOXES & CONDUITS TO ACCOMMODATE NEW POINT OF EQUIPMENT CONTROLS CONNECTION AS REQUIRED.
4. PROVIDE 3/4"C WITH (2)#10 CU & (1) #10 CU GND TO PANEL. PROVIDE 30A/1P GFE 30mA BREAKER AT THE PANEL.

SYMBOL LEGEND

RENOVATIONS	
	EXISTING TO REMAIN
	NEW

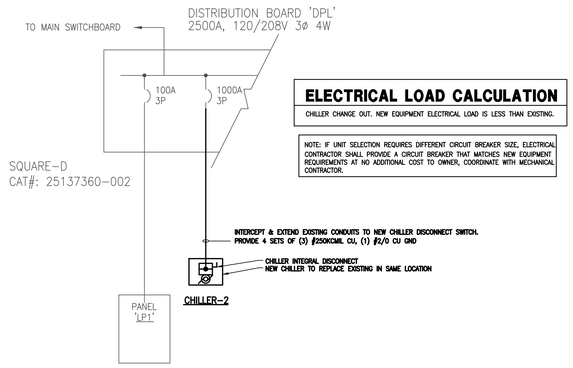

2 **PARTIAL ONE-LINE DIAGRAM**
SCALE: NONE

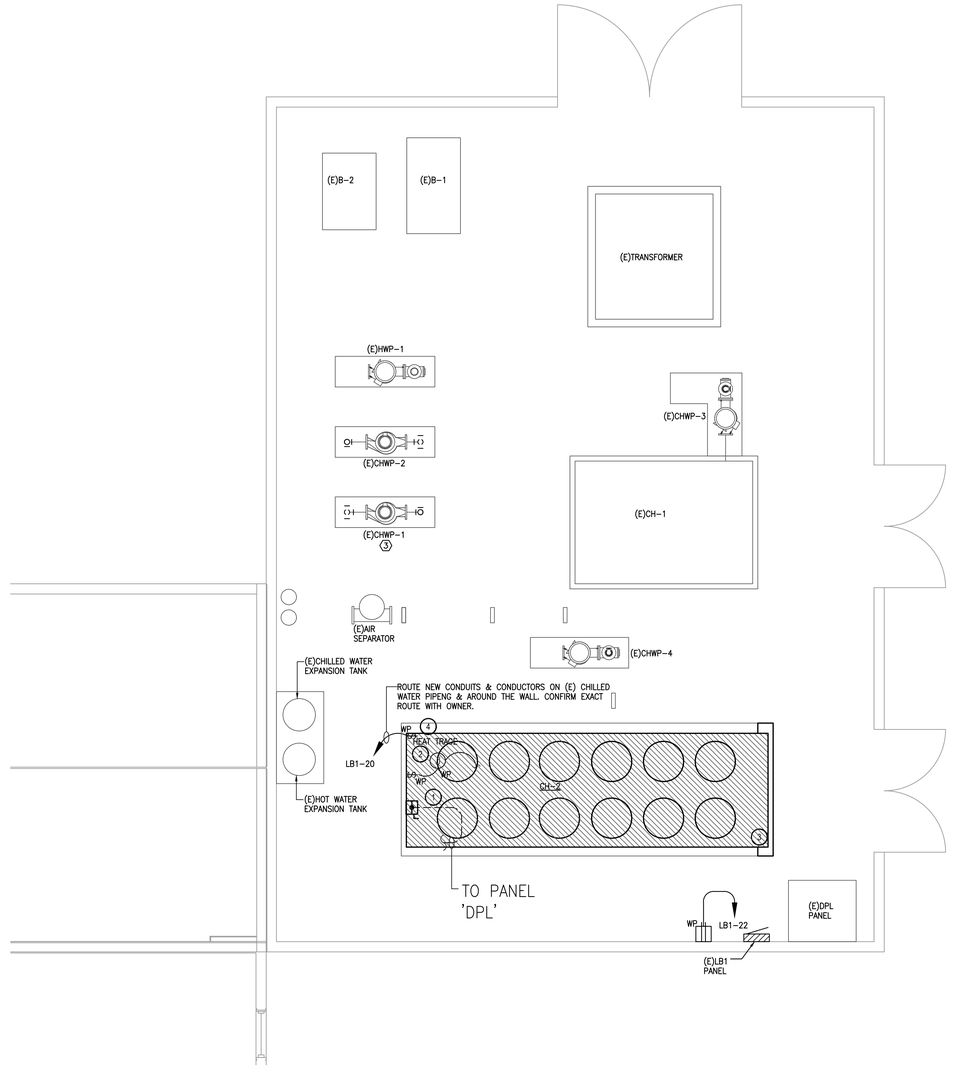

1 **ELECTRICAL FLOOR PLAN - WESTBROOK HS**
SCALE: 1/4" = 1'-0"

Project No:	2022-01678-00
Drawn By:	AH
Checked By:	JZ
Date:	05-16-2022
Revision Dates:	

CONSULTANTS

MEP ENGINEERS

SALAS O'BRIEN
10930 W. SAM HOUSTON PKWY N., SUITE 900
HOUSTON, TX 77064
OFFICE: 281-664-1900
FAX: 281-664-1912

SALAS O'BRIEN | expect a difference.
10930 W. Sam Houston Parkway N., Suite 900
Houston, Texas 77064
281.664.1900 | Registration No. F-4111
Project No. 2022-01678-00

BEAUMONT INDEPENDENT SCHOOL DISTRICT
HVAC UPGRADES PART 2

BEAUMONT INDEPENDENT SCHOOL DISTRICT
BISD Preparing Our Next Generation

BRADLEY KALMANS
80219
LICENSED PROFESSIONAL ENGINEER
STATE OF TEXAS
05-16-2022

ELECTRICAL FLOOR PLAN - WESTBROOK HS

E1.1