

© Bolton & Menk, Inc. 2025. All Rights Reserved.
PL1501_L100_MN1542135314000\CD\1501155114_C_PLOT_N1.dwg 3/4/2025 4:07:03 PM



NOTES

- REFER TO SHEET T1.00, TITLE SHEET, FOR RELATED GENERAL NOTES.
- CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS PRIOR TO THE BIDDING.
- CONTRACTOR SHALL BE RESPONSIBLE FOR SHOOTING AND RECORDING EXISTING PAVEMENT SURFACE ELEVATIONS. ONCE BITUMINOUS PAVEMENT HAS BEEN REMOVED, THE CONTRACTOR SHALL BE RE-ESTABLISH ELEVATIONS THAT WILL ENSURE POSITIVE DRAINAGE AS APPROPRIATE.
- RESTRIPE PARKING LOT STALLS AS APPLICABLE. OBSERVE AND MAP EXISTING PRIOR TO BEGINNING WORK.
- WHERE CONCRETE BUMPER CURBS EXIST, CONTRACTOR TO REMOVE AND RESET AFTER ACCOMPLISHING PAVEMENT MAINTENANCE. REPLACE WITH NEW WHERE FOUND BROKEN, DETERIORATED, OR IF BROKEN DURING HANDLING.

LEGEND


- 1 C2.01 REFERENCE KEY TO SITE DETAILS
DETAIL I.D. NUMBER (TOP)
DETAIL SHEET NUMBER (BOTTOM)
- 3 C2.01 PROPOSED ASPHALT PAVEMENT CRACKSEAL / SEAL COAT/ FOG SEAL
- 6 C2.01 PROPOSED CONCRETE WALK REPLACEMENT
- 5 C2.01 PROPOSED MEDIUM DUTY ASPHALT PAVEMENT REPAIR

NORTHROP QUANTITIES

THE CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS, INCLUDING DETERMINATION OF ALL QUANTITIES, PRIOR TO THE WORK. BASE BID AMOUNT INCLUDES ALL WORK TO ACCOMPLISH THAT WHICH IS ILLUSTRATED ON THE PLAN, UNLESS OTHERWISE NOTED.

"ESTIMATED" QUANTITIES PROVIDED ARE FOR THE CONTRACTOR'S REFERENCE ONLY.
"ASSUMED" QUANTITIES SHALL BE INCLUDED IN THE CONTRACTOR'S BASE BID COST.
FINAL QUANTITIES WILL BE ADJUSTED USING UNIT PRICES.

- NORTH PARKING LOT
 - ESTIMATED BITUMINOUS SEAL COAT / FOG SEAL = 1300 S.Y.
 - ASSUMED BITUMINOUS CRACK SEAL = 150 L.F.
 - ASSUMED MEDIUM DUTY ASPHALT PAVEMENT REPAIR = 30 S.Y
- SOUTH PLAYGROUND
 - ESTIMATED BITUMINOUS SEAL COAT EMULSION ONLY = 1750 S.Y.
 - ASSUMED BITUMINOUS CRACK SEAL = 620 L.F.
- SIDEWALK REPLACEMENT
 - ASSUMED ASPHALT WALK REMOVE AND CONCRETE REPLACEMENT = 1300 S.F.
 - ASSUMED CONCRETE WALK REPLACEMENT = 850 S.F

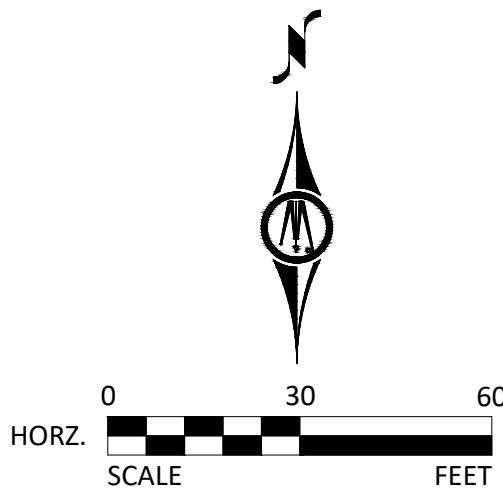

I HEREBY CERTIFY THAT THIS PLAN, SPECIFICATION, OR REPORT WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY LICENSED LANDSCAPE ARCHITECT UNDER THE LAWS OF THE STATE OF MINNESOTA.

JAY R. POMEROY
LIC. NO. 23543 DATE 03/03/2025



3300 FERNBROOK LANE NORTH, SUITE 300
PLYMOUTH, MN 55447
Phone: (763) 544-7129
Email: Plymouth@bolton-menk.com
www.bolton-menk.com

DESIGNED	NO.	ISSUED FOR	DATE
CDL			
DRAWN			
CA			
CHECKED			
JRP			
CLIENT PROJ. NO.			
OP#25-2521			

MINNEAPOLIS PUBLIC SCHOOLS

FY25 SITE AND PAVEMENT IMPROVEMENTS

NORTHROP ELEMENTARY SCHOOL

SHEET

C1.03