



ADDENDUM NO. 2 TO ASBESTOS ABATEMENT SPECIFICATIONS

**Asbestos Abatement Prior to Renovations
@
Thompson K-8 International Academy**

Owner:
Southfield Public Schools
24661 Lahser Road
Southfield, Michigan 48033

Building(s):
Thompson K-8 International Academy
16300 Lincoln Drive
Southfield, Michigan 48076

AEG Project #: **AE231022**
Issue Date: Friday, April 18, 2025
Bids Due: **10:00 A.M., Wednesday, April 23, 2025**

The following changes have been made to the asbestos abatement specification for asbestos abatement activities at Thompson K-8 International Academy and should be incorporated into the Scope-of-Work.

1. **Bid No. 25.01 – Asbestos Abatement Prior to Renovations at Thompson K-8 International Academy**
Thompson K-8 International Academy, Project TIA (Pages 19-25)

Due to corrections to summary of locations and quantities of asbestos materials, this entire section of the specification has been corrected to include updated summary of locations and maps. A copy of the corrected Thompson K-8 International Academy – Project TIA section for “Asbestos Abatement Prior to Renovations at Thompson K-8 International Academy” is located in Attachment #1. Please refer to the corrected “Asbestos Abatement Prior to Renovations at Thompson K-8 International Academy – Project TIA” included in this addendum only. Do not refer to the “Asbestos Abatement Prior to Renovations at Thompson K-8 International Academy – Project TIA” issued in the specification documents.

2. **Bid No. 25.01 – Asbestos Abatement Prior to Renovations at Thompson K-8 International Academy**
Thompson K-8 International Academy, NESHAP Asbestos Inspection Report

A copy of the NESHAP Asbestos Inspection Report conducted by Arch Environmental Group, Inc. at Thompson K-8 International Academy is included. The NESHAP Asbestos Inspection Report is located in Attachment #2.

Southfield Public Schools
Bid No. 25.01
Addendum No. 2
Attachment #1

- Bid No. 25.01 -
Thompson K-8 International Academy
Project Scope of Work

Project Description: Bid No. 25.01 is for the necessary asbestos abatement projects at Thompson K-8 International Academy prior to building renovations. The projects, which will be during June and July 2025, and will include the removal and disposal of all exterior window systems with asbestos caulk and asbestos glazing materials.

Project Sequencing: There will be one (1) project group for the asbestos abatement activities at Thompson K-8 International Academy.

Project Group TIA - "Exterior Window System Abatement"

The first and only project for abatement at Thompson K-8 International Academy includes the removal and disposal of all exterior window systems with asbestos caulk and asbestos glazing materials. This project will include, but is not limited to, all exterior window systems at the project site. These projects at Thompson K-8 International Academy will involve multiple regulated areas to remove the asbestos materials using Class II removal procedures. The project will begin on Monday, June 23, 2025, and will be complete with all abatement activities, including tear down activities, by the end of the workday on Saturday, July 12, 2025. The project schedule allows for a total of seventeen (17) workdays (Monday-Saturday, Monday-Thursday, Saturday, Monday-Saturday) to complete the project.

SCOPE OF WORK and REQUIREMENTS -

The "Abatement Activities", "Summary of Locations", "Abatement Requirements", "Final Clearance Sample Requirements", "Project Schedule" and "Project Diagrams" for the asbestos abatement projects are provided on the following pages. Information for each project is generally formatted in the following manner (by section):

- **Abatement Activities**
This section provides a summary of all asbestos materials and non-asbestos materials required to be removed and disposed of by the Contractor.
- **Summary of Locations**
For projects with more than one functional space (location), this section provides a tabular summary for all materials identified in the "Abatement Activities" section. When present, room entries and closets are included in the classroom area and are not listed individually.
- **Abatement Requirements**
This section provides a summary of all set-up, removal and cleaning requirements relating to the removal of the materials identified in the "Abatement Activities" section.
- **Final Clearance Sample Requirements**
This section provides a summary of the types of clearance samples scheduled to be collected, the number of samples to be collected and the clearance level.
- **Project Schedule**
This section provides a summary of the project schedule, including project start and end dates. For certain projects, additional milestone dates may be provided.
- **Project Diagrams**
This section provides a graphical representation of the limits of the regulated area, showing all functional spaces included in the project.

"General Information and Requirements" relating to the entire bid are located after the information for Thompson K-8 International Academy.

ADDENDUM NO. 1

- **General Information and Requirements**

This section provides general project information and project requirements relating to all activities associated with the work at each of the Southfield Public Schools's buildings.

Project Group TIA-1 - "Exterior Window System Abatement"

Project Summary:

The first and only project for abatement at Thompson K-8 International Academy includes the removal and disposal of all exterior window systems with asbestos caulk and asbestos glazing materials. This project will include, but is not limited to, all exterior window systems at the project site. These projects at Thompson K-8 International Academy will involve multiple regulated areas to remove the asbestos materials using Class II removal procedures. The project will begin on Monday, June 23, 2025, and will be complete with all abatement activities, including tear down activities, by the end of the workday on Saturday, July 12, 2025. The project schedule allows for a total of seventeen (17) workdays (Monday-Saturday, Monday-Thursday, Saturday, Monday-Saturday) to complete the project.

Abatement Activities:

1. Remove and dispose of all exterior window systems with asbestos caulk and asbestos glazing from the identified areas at Thompson K-8 International Academy.

Summary of Locations:

Room / Location Materials ->	WC/WG
Rm 100	40 lf (2 Frames 6'x8')
Rm 101	40 lf (2 Frames 6'x8')
Rm. 102	60 lf (3Frames 6'x8')
Rm. 104	60 lf (3 Frames 6'x8')
Rm 105	40 lf (2 Frames 6'x8')
Rm 106	40 lf (2 Frames 6'x8')
Rm. 109	40 lf (2 Frames 6'x8')
Rm. 110	40 lf (2 Frames 6'x8')
Rm. 111	40 lf (2 Frames 6'x8')
Rm. 112	40 lf (2 Frames 6'x8')
Rm. 113	40 lf (2 Frames 6'x8')
Rm. 114	40 lf (2 Frames 6'x8')
Rm. 115	40 lf (2 Frames 6'x8')
Rm. 116	40 lf (2 Frames 6'x8')
Rm. 118 – Storage A	20 lf (1 Frame 6'x8')
Rm. 118 – Storage B	20 lf (1 Frame 6'x8')
Rm. 118 – Storage C	20 lf (1 Frame 6'x8')
Rm. 118 – Storage D	20 lf (1 Frame 6'x8')
First Floor South Hallway	40 lf (2 Frames 3'x8')
East Stairwell	40 lf (2 Frames 3'x8')
Rm. 200	40 lf (2 Frames 6'x8')
Rm. 201	40 lf (2 Frames 6'x8')
Rm. 202	40 lf (2 Frames 6'x8')
Rm. 203	60 lf (3 Frames 6'x8')
Rm. 204	80 lf (4 Frames 6'x8')
Rm. 205	60 lf (3 Frames 6'x8')

ADDENDUM NO. 1

Southfield Public Schools

Asbestos Abatement Prior to Renovations @ Thompson K-8 International Academy

Room / Location Materials ->	WC/WG
Rm. 210	40 lf (2 Frames 6'x8')
Rm. 211	40 lf (2 Frames 6'x8')
Rm. 212	40 lf (2 Frames 6'x8')
Rm. 214	60 lf (3 Frames 6'x8')
Rm. 215	60 lf (3 Frames 6'x8')
Second Floor East Hallway	120 lf (6 Frames 3'x8')
Second Floor West Hallway	120 lf (6 Frames 3'x8')
West Stairwell	40 lf (2 Frames 3'x8')
Library	60 lf (3 Frames 6'x8')
Rm. 109	60 lf (3 Frames 6'x8')
Rm. 110	60 lf (3 Frames 6'x8')
Rm. 111	20 lf (1 Frame 6'x8')
Rm. 112	20 lf (1 Frame 6'x8')
Rm. 113	20 lf (1 Frame 6'x8')
Rm. 114	20 lf (1 Frame 6'x8')
Rm. 115	20 lf (1 Frame 6'x8')
Rm. 116	20 lf (1 Frame 6'x8')
East Stairwell	20 lf (1 Frame 3'x8')
Rm. 200	20 lf (1 Frame 6'x8')
Rm. 201	20 lf (1 Frame 6'x8')
Rm. 202	20 lf (1 Frame 6'x8')
Rm. 203	40 lf (2 Frames 6'x8')
Rm. 204	40 lf (2 Frames 6'x8')
Rm. 205	40 lf (2 Frames 6'x8')
Rm. 210	20 lf (1 Frame 6'x8')
Rm. 211	20 lf (1 Frame 6'x8')
Rm. 212	20 lf (1 Frame 6'x8')
Rm. 214	40 lf (2 Frames 6'x8')
Rm. 215	40 lf (2 Frames 6'x8')
Second Floor East Hallway	60 lf (3 Frames 3'x8')
Second Floor West Hallway	60 lf (3 Frames 3'x8')
West Stairwell	20 lf (1 Frame 3'x8')

Key for Table

WC/WG

Exterior Window with Asbestos Caulk and Asbestos Glazing.

The scope of abatement for Project Group TIA-1 includes all exterior windows with asbestos caulk and asbestos glazing materials.

ADDENDUM NO. 1

Southfield Public Schools

Asbestos Abatement Prior to Renovations @ Thompson K-8 International Academy

Abatement Requirements:

The Contractor will be allowed to construct multiple negative pressure enclosures for the complete removal of all of the materials detailed in the “Abatement Activities” for Project Group TIA-1.

1. The Contractor is responsible for all of the materials listed in the “Abatement Activities” located inside of the project areas. The project areas include all portions of the functional spaces listed in the “Summary of Locations” table. When present in, connected to or adjacent to the room, materials located in bathrooms, closets, storage rooms, below fixtures (such as radiators, cabinets and bookcases), behind furniture and inside sink cabinets. Additional description for certain areas are listed below:
 - Boarding Up of Window Openings: The Contractor will include in the submitted base bid, cost associated with supplying **all** labor and materials to secure, board up and weatherproof **all** window openings created with removal and disposal of exterior window systems. All window openings will be sealed with minimum of ½ inch plywood and 2’ x 4’ supports to provide security and protection from weather, which is expected to remain in place for up to four (4) weeks.
2. The building (including project areas) will not be entirely emptied of all furniture, furnishings and movable objects prior to the start of the project. Where necessary, this activity will be completed by the Contractor and must be included in the submitted base bid (inclusive of all cost – labor, supplies, disposal, etc).
3. The regulated area constructed to address asbestos abatement in this project will be set up in accordance with the following minimum guidelines prior to the start of any abatement activities:
 - Asbestos banner tape and asbestos warning signs will be set up on the exterior of the work areas extending a minimum of 8’ from the window system, and inside of the room extending a minimum of 8’ from the window system.
 - A minimum of one (1) layer of six-mil polyethylene sheeting will be set-up on the floors/ground in all work areas and will be secured to the floor below window systems. The polyethylene sheeting will be sufficient in length to catch all window glazing which may fall to the ground and to wrap the window systems for disposal.
 - Where cranes, lifts, scaffolding, or other equipment are used to access the exterior windows, the Contractor will be required to carefully lower removed windows to the ground and will not be allowed to drop any windows frames to the ground.
4. All window systems will be removed using intact removal methods. The Contractor will not be allowed to cut through caulk materials using mechanical means. The competent person will be required to ensure that all window systems are removed intact and that all procedures relating to the removal are strictly followed. THE CONTRACTOR WILL BE RESPONSIBLE FOR DAMAGE TO THE ADJACENT WALLS.
5. All asbestos-containing materials must be removed using wet methods and then immediately wrapped in a minimum of one layer of six-mil polyethylene sheeting. Waste will be randomly checked as it is transported from the regulated area. All waste determined to not be adequately wet will be sent back into the regulated area. No waste may remain open inside the regulated area. All waste must be removed from the regulated area prior to the start of the visual inspection.
6. Final cleaning activities will include a combination of wire brushing, rinsing, wet-wiping and HEPA vacuuming of all window openings and all vertical and horizontal surfaces inside of the building between the exterior wall and the interior banner tape. Final cleaning will also include a review outside of the building to ensure that all debris has been cleaned up from the grass.

ADDENDUM NO. 1

Southfield Public Schools

Asbestos Abatement Prior to Renovations @ Thompson K-8 International Academy

Page 7

7. At the conclusion of the final cleaning activities in the enclosure, a visual inspection will be completed in accordance with the listed "Visual Inspection Procedures" (Item #4, "General Requirements and Information").

Final Clearance Sample Requirements:

Each of the regulated areas established for the removal of the materials described in Project Group TIA-1 will be cleared using Phase Contrast Microscopy (PCM). Pursuant to the requirements of AHERA, five (5) PCM samples will be collected from each regulated area. All five samples must be analyzed below 0.01 fibers per cubic centimeter allow for tear down of the enclosure. All PCM air samples will be collected in accordance with the AHERA regulation and all EPA recommended guidelines.


Project Schedule:

This project will begin on Monday, June 23, 2025, and will be complete with all abatement activities, including tear down activities, by the end of the workday on Saturday, July 12, 2025. The project schedule allows for a total of seventeen (17) workdays (Monday-Saturday, Monday-Thursday, Saturday, Monday-Saturday) to complete the project. Additional project dates include:

#	Location	Start	Ready for Pas	End	# Days
TIA-1	Exterior - Window Abatement	Monday, 6-23-25	Saturday, 7-12-25 @ 5:30 p.m.	Saturday, 7-12-25 @ 5:30 p.m.	17 w/d

Project Diagrams:

There are two (2) project diagrams provided for Project Group TIA-1.



architects planners interiors

PROJECT
Thompson International
K-8
BP12
Southfield Public Schools
Southfield
Michigan

PROJECT NUMBER

SHEET NUMBER

— 100 —



SCALE 1/16" = 1'-0"



FRENCH
associates

236 MILL STREET
ROCHESTER, MI
48307
T: 248.656.1377
frenchala.com
© 2004 French's, Inc.

Thompson International
K-8
BP12
Southfield Public Schools
Southfield
Michigan

Composite Second
Floor Plan
Demolition

2023-090.1

AD2.20



SCALE 1/16" = 1'-0"

Southfield Public Schools
Bid No. 25.01
Addendum No. 2
Attachment #2



NESHAPs ASBESTOS INSPECTION REPORT – REVISION

Thompson K-8 International Academy
16300 Lincoln Drive
Southfield, Michigan 48076

Prepared For:
Southfield Public Schools
24661 Lahser Road
Southfield, Michigan 48033

Prepared By:
Arch Environmental Group, Inc.
37720 Interchange Drive
Farmington Hills, Michigan 48335

Project #:
Project Date(s):
Report Revision Date:

AE230757
February 13 - 28, 2024
August 7, 2024

TABLE OF CONTENTS

1.0	Project Summary	1
2.0	AHERA Management Plan Summary	1
3.0	Asbestos Inspection.....	1-3
3.1	Materials Proven To Be Asbestos	1
3.2	Materials Proven To Be Non-Asbestos	2-3
4.0	Exclusions and Exceptions	3
4.1	Inaccessible Materials	3
4.2	Inaccessible Locations	3
5.0	Sampling Strategies	4
5.1	Sampling Exceptions	4
6.0	Regulations and Standards Used for Inspection	4
7.0	Asbestos Inspection Terminology	4-5
8.0	Report Format	5

Appendices

A	Information on Asbestos-Containing Materials	6-12
B	Floor Plans Indicating Locations of Asbestos-Containing Materials.....	13-20
C	Tables of ACM/Non-ACM	21-71
	Sorted by Functional Space	24-47
	Sorted by Homogenous Area	48-71
D	Bulk Sample Results	72-130
E	Credentials	131-138

1.0 / Project Summary

Arch Environmental Group, Inc. (AEG) completed a NESHAPs Asbestos Inspection to evaluate the Thompson K-8 International Academy located at 16300 Lincoln Drive, Southfield, Michigan for Southfield Public Schools to identify asbestos-containing materials which may be present and impacted by the proposed building demolition activities. The inspection included the entire interior and exterior of the building to identify specific locations and quantities of asbestos-containing materials.

2.0 / AHERA Management Plan Summary

AEG reviewed the AHERA Management Plan prior to the NESHAPs Asbestos Inspection activities to gather information on previously identified known and assumed asbestos-containing materials and known non-asbestos-containing materials activities. The initial AHERA asbestos inspection report provided only cursory information on the known and assumed materials. AEG determined that information provided was insufficient. Therefore, AEG opted to not use the results from the original inspection or subsequent inspection related activities.

3.0 / Asbestos Inspection

AEG's Accredited Asbestos Inspectors completed a comprehensive asbestos inspection which examined each material in each functional space in the building. The field inspection also included a review of the building for all suspect materials (to ensure that all asbestos-containing materials have been properly identified).

All inspection work was completed by Ms. Tiffany Fell and Mr. Jordan Spratt, experienced inspectors properly trained and accredited through the State of Michigan's Department of Licensing and Regulatory Affairs. Copies of all current accreditation and training documents are located in Appendix E. All material analysis ("bulk sample analysis") was conducted by an independent third-party laboratory - APEX Research, Inc., Brighton, Michigan. APEX Research, Inc. is an accredited laboratory through the EPA's NVLAP program.

3.1 / Materials Proven To Be Asbestos

The inspection identified the following known and assumed asbestos-containing materials:

Surfacing Materials

None

Thermal System Insulation

Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap (Assumed ACM) 142 lf

Miscellaneous Materials

Exterior Door Caulk, Interior Side, Grey	120 lf
Exterior Door Caulk, Interior Side, Tan	440 lf
Exterior Door Caulk, Interior Side, White	80 lf
Exterior Window Caulk, Interior Side, Grey	1,460 lf
Exterior Window Glaze, Interior Side, Grey	710 lf
Floor Tile, 9" x 9", Tan with Grey	50 sf
Floor Tile, 9" x 9", Tan with White	12,660 sf
Hard Plaster Ceiling Edge Caulk, Tan (Assumed ACM)	60 lf
Interior Door Caulk, Tan	2,680 lf
Interior Window Caulk, Tan	330 lf
Sink Undercoating, Black	4 #
Tagged Fire Door (Assumed ACM)	45 #
Tagged Fire Door Frame (Assumed ACM)	40 #
Tectum Wall Panels (Assumed ACM)	900 sf

3.2 / Materials Proven To Be Non-Asbestos

All other materials identified during the asbestos inspection activities were sampled and determined to be non-asbestos-containing. This includes:

- Adhesive (Gluepods) Chalkboard/Whiteboard
- Carpet Adhesive, Yellow
- Covebase Adhesive, 4", Black
- Covebase Adhesive, 4", Blue
- Covebase Adhesive, 4", Grey
- Covebase Adhesive, 4", Tan
- Covebase, 4", Black
- Covebase, 4", Blue
- Covebase, 4", Grey
- Covebase, 4", Tan
- Drywall
- Drywall Ceiling
- Drywall Mud
- Drywall Tape
- Duct Sealant, Grey
- Exterior Door Caulk, Exterior Side, Grey
- Exterior Overhang
- Exterior Pebble Fascia
- Exterior Vent Caulk, Grey
- Exterior Wall Joint Caulk, White
- Exterior Window Caulk, Exterior Side, Grey
- Floor Tile Mastic, 12" x 12", Blue Mottled
- Floor Tile Mastic, 12" x 12", Cream Mottled
- Floor Tile Mastic, 12" x 12", Cream with Tan
- Floor Tile Mastic, 12" x 12", Grey Mottled
- Floor Tile Mastic, 12" x 12", White with Grey
- Floor Tile Mastic, 9" x 9", Tan with Grey
- Floor Tile Mastic, 9" x 9", Tan with White
- Floor Tile, 12" x 12", Blue Mottled
- Floor Tile, 12" x 12", Cream Mottled
- Floor Tile, 12" x 12", Cream with Tan
- Floor Tile, 12" x 12", Grey Mottled
- Floor Tile, 12" x 12", White with Grey
- HVAC Vibration Dampener, Black
- Interior Door Caulk, White
- Interior Door Window Glaze, Grey
- Interior Door Window Glaze, White
- Interior Window Glaze, White
- Lab Sink
- Lay-in Ceiling Tile, 2' x 2', Dots and Gouges
- Lay-in Ceiling Tile, 2' x 2', Drywall
- Lay-in Ceiling Tile, 2' x 2', Textured
- Sink Undercoating, Grey
- Hard Plaster Ceiling, Rough Texture, Brown Coat
- Hard Plaster Ceiling, Rough Texture, Finish Coat
- Hard Plaster Ceiling, Smooth, Brown Coat
- Hard Plaster Ceiling, Smooth, Finish Coat
- Hard Plaster Wall, Rough Texture, Brown Coat
- Hard Plaster Wall, Rough Texture, Finish Coat

- Hard Plaster Wall, Smooth, Brown Coat
- Hard Plaster Wall, Smooth, Finish Coat
- Straight Pipe Insulation, Fiberglass with Canvas Wrap

4.0 / Exclusions and Exceptions

4.1 / Inaccessible Materials

AEG did not conduct destructive investigation activities. It is possible that there may be additional asbestos pipe insulation materials in various inaccessible locations, such as inside wall cavities, inside wall construction materials (between cinder block or brick, especially around water sources) and above inaccessible ceilings (such as drywall and hard plaster).

AEG was unable to inspect the interior of any mechanical equipment and boilers. There may be suspect asbestos-containing materials inside of older mechanical equipment, such as fire bricks, mortar, and door lining materials. These materials should be sampled once the mechanical equipment is shut off and opened. If present, and until sampled, these materials must be assumed to be asbestos-containing and must be handled accordingly during any maintenance, renovation, or demolition activities.

AEG was unable to sample any adhesive materials, if present, used to attach blackboards, whiteboards, and/or tack boards to the wall. There may be dollops of adhesive (commonly referred to as “gluepods”) between the boards and the wall. These materials should be sampled once the blackboards, whiteboards, and/or tack boards are removed. If present, and until sampled, these materials must be assumed to be asbestos-containing and must be handled accordingly during any maintenance, renovation, or demolition activities.

AEG was unable to inspect below the wood flooring in the Gym and Stage. There may be suspect asbestos-containing backing below the wood flooring, such as adhesives, felt papers, or tars. These materials should be sampled once the wood flooring is removed or an access point is opened. If present, and until sampled, these materials must be assumed to be asbestos-containing and must be handled accordingly during any maintenance, renovation, or demolition activities.

4.2 / Inaccessible Locations

AEG’s Accredited Asbestos Inspectors indicated that all known functional spaces in the building were accessible for review, except for:

- Gym Locker Rooms – This functional space was locked. Though not expected, it is possible that there may be additional asbestos flooring materials present in this space or other suspect asbestos-containing materials beyond those identified in this report. All new suspect asbestos containing materials found in these spaces are assumed to be asbestos containing and must be treated as such until sampling proves otherwise.
- Plenums Above Hard Ceilings – Access to these spaces was limited. Additional quantities of asbestos-containing pipe insulation materials are expected to be present beyond those identified in this report. It is also possible that there may be suspect asbestos-containing materials present in these spaces beyond those identified in this report.

5.0 / Sampling Strategies

AEG sampled all materials in accordance with AHERA (763.86 "Sampling"). For each similar material found throughout the facility, AEG collected at least two (2) samples of the material to determine if the material contained asbestos.

5.1 / Sampling Exceptions

In an effort to preserve the integrity of the roof, AEG did not conduct destructive sampling of roofing materials. All roofing materials, including, but not necessarily limited to, felt papers, shingles, flashings, tars, and mastics, should be sampled prior to any renovation or demolition activities. Until sampled, all roofing materials must be assumed to be asbestos-containing and must be handled accordingly during any maintenance, renovation, or demolition activities.

There were no other unusual sampling exceptions made during this investigation. AEG did not sample wood paneling, wood ceilings, rolled fiberglass insulation, yellow fiberglass pipe insulation, yellow fiberglass ceiling panels, glass, brick, cinder block or concrete. These building materials are specifically excluded by the EPA in building inspections through the AHERA regulation or the EPA's "100 Commonly Asked Questions about the AHERA Regulation."

6.0 / Regulations and Standards Used for Inspection

The inspection was conducted in accordance with the United States Environmental Protection Agency's (EPA's) Asbestos Hazard Emergency Response Act (AHERA). The AHERA regulation provides stringent standards and guidelines for the sampling, identification and management of asbestos-containing materials, which at a minimum meet the asbestos inspection requirements for demolition and renovation activities under the EPA's National Emissions Standard for Hazardous Air Pollutants (NESHAPs) for asbestos. Pursuant to the needs of Southfield Public Schools (determination of locations of asbestos-containing materials throughout the building prior to renovations or demolition) and the description of services provided by AEG for this NESHAPs Asbestos Inspection, AEG did not assess any material during the inspection activities. Assessments, identification of types, locations and extent of damaged materials and recommended response actions are not included in this report. **This report does not replace the original AHERA Management Plan. The report should be made available to all building employees, occupants (or their legal guardians), short-term workers, and renovation/demolition contractors.**

7.0 / Asbestos Inspection Terminology

For purposes of this Asbestos Inspection, AEG completed all aspects of the inspection in accordance with EPA and OSHA regulations. AHERA, ASHARA, NESHAPs, the EPA's "Purple" and "Green" books and the OSHA regulation outline procedures for identifying, sampling, analyzing and assessing potential asbestos-containing materials. Important words/phrases used throughout these regulations and guidance documents and used throughout this report are (as defined by AHERA (in 40 CFR 763.83)):

- "Asbestos-Containing Material (ACM)" means any material containing greater than one percent (>1%) asbestos.
- "Category I Non-Friable Asbestos-Containing Materials" means non-friable asbestos-containing packings, gaskets, resilient floor coverings, and asphalt roofing products.
- "Category II Non-Friable Asbestos-Containing Materials" means any other non-friable asbestos-containing materials, excluding Category I non-friable materials.
- "Functional space" means a room, group of rooms, or homogeneous area (including crawl spaces or the space between a dropped ceiling and the floor or roof deck above), such as classroom(s), a cafeteria, a gymnasium, hallway(s), designated by a person accredited to prepare management plans, design abatement projects, or conduct response actions. [For purposes of this inspection, AEG's Accredited Asbestos Inspector has included the area above a ceiling in the corresponding functional space. For example, the space above the ceiling in Office A is a part of Office A.]

- “Friable” when referring to material in a school building means that the material, when dry, may be crumbled, pulverized, or reduced to powder by hand pressure, and includes previously non-friable material after such previously non-friable material becomes damaged to the extent that when dry it may be crumbled, pulverized, or reduced to powder by hand pressure.
- “Homogeneous Area” means an area of surfacing material, thermal system insulation material, or miscellaneous material that is uniform in color and texture.
- “Non-friable” means material in a school building which when dry may not be crumbled, pulverized, or reduced to powder by hand pressure.
- “Regulated Asbestos-Containing Materials” means all friable asbestos-containing materials; Category I non-friable ACM that has become friable; Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting or abrading; or Category II non-friable ACM that has a high probability of becoming or has become crumbled, pulverized or reduced to powder by forces expected to act on it during demolition or renovation operations.

8.0 / Report Format

The remainder of AEG’s report is broken down into the following five (5) sections:

- *Appendix A – Information on Asbestos-Containing Materials:* This appendix provides a report user (which may be Owner’s representatives, maintenance and custodial workers, as well as construction managers or architects) with information related to the presence of asbestos-containing materials. AEG provides this information for use by persons unaccustomed to the technical detail of standard asbestos inspection reports. The user will be able to gather a synopsis of all other information provided in the report.
- *Appendix B – Floor Plans Indicating Locations of Asbestos-Containing Materials:* This appendix provides color maps graphically illustrating the approximate locations of each of the asbestos-containing materials identified during the inspection.
- *Appendix C – Tables of ACM/Non-ACM:* This appendix provides a detailed listing of all materials (homogeneous areas) in each location (functional space) in the building. Information on each material includes; material description, indication of asbestos-containing material (yes, no or assumed), material category (surfacing, thermal system insulation, friable (or non-friable) and quantity. There are two (2) tables provided: one (1) sorted by location (functional space) and one (1) sorted by material (homogeneous area).
- *Appendix D – Bulk Sample Results:* This appendix provides all of the laboratory results for the bulk samples collected. An AEG formatted report is provided with results from the laboratory. Sample chains-of-custody and laboratory accreditation are provided as well.
- *Appendix E – Inspector Credentials:* This appendix provides The State of Michigan accreditations, training documentation, and appropriate signatures for each of the Accredited Asbestos Inspectors.

APPENDIX A

Information on Asbestos-Containing Materials

INFORMATION ON ASBESTOS-CONTAINING MATERIALS

AEG's NESHAPs Asbestos Inspection includes an inspection of the building for asbestos-containing materials and correlates the locations of the materials to the current building layout.

Summary of Impact of Asbestos-Containing Materials on Building Renovation or Demolition Projects

AEG's inspection of the facility identified several asbestos-containing materials which may be impacted by any building renovations or demolition. The following materials were identified as Regulated Asbestos-Containing Materials (RACM):

- Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap

In accordance with the EPA's National Emissions Standard for Hazardous Air Pollutants (NESHAPs), these materials should be removed prior to the proposed renovation or demolition activities. The NESHAPs regulation does allow for certain Category I and Category II non-friable materials to remain in the building prior to demolition, and this can be accomplished if certain demolition criteria are met (i.e. worker protection, material handling, waste disposal, etc.). However, this is typically cost prohibitive. AEG recommends the removal of all asbestos-containing materials prior to building renovation or demolition.

Quantities of Asbestos-Containing Materials

The following types of materials are known asbestos-containing materials, or are assumed and could not be sampled as part of this inspection, at Thompson K-8 International Academy located at 16300 Lincoln Drive, Southfield, Michigan 48076 for Southfield Public Schools:

<u>Known Material Type</u>	<u>Total sf/lf/#</u>
Exterior Door Caulk, Interior Side, Grey	120 lf
Exterior Door Caulk, Interior Side, Tan	440 lf
Exterior Door Caulk, Interior Side, White	80 lf
Exterior Window Caulk, Interior Side, Grey	1,460 lf
Exterior Window Glaze, Interior Side, Grey	710 lf
Floor Tile, 9" x 9", Tan with Grey	50 sf
Floor Tile, 9" x 9", Tan with White	12,660 sf
Interior Door Caulk, Tan	2,680 lf
Interior Window Caulk, Tan	330 lf
Sink Undercoating, Black	4 #

<u>Assumed Material Type</u>	<u>Total sf/lf/#</u>
Hard Plaster Ceiling Edge Caulk, Tan	60 lf
Tagged Fire Door	45 #
Tagged Fire Door Frame	40 #
Tectum Wall Panels	900 sf
Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	142 lf

Room-by-Room Inventory of Asbestos-Containing Materials

A listing of all materials in each room (functional space) can be found in Appendix B. The following is a room-by-room listing of all asbestos-containing materials.

Floor	Location	Material	sf/lf/#
1	Art Hallway	Exterior Door Caulk, Interior Side, Tan	80 lf
1	Boiler Room	Exterior Door Caulk, Interior Side, Tan	20 lf
1	Boiler Room	Interior Door Caulk, Tan	20 lf
1	Boiler Room	Tagged Fire Door	1 #
1	Boiler Room	Tagged Fire Door Frame	1 #
1	Boiler Room - Laundry	Interior Door Caulk, Tan	20 lf
1	Boiler Room - Laundry	Tagged Fire Door	1 #
1	Boiler Room - Laundry	Tagged Fire Door Frame	1 #
1	Boiler Room - Storage	Exterior Door Caulk, Interior Side, Tan	20 lf
1	Boiler Room - Storage	Interior Door Caulk, Tan	20 lf
1	Boiler Room - Storage	Tagged Fire Door	1 #
1	Boiler Room - Storage	Tagged Fire Door Frame	1 #
1	Boiler Room - Tunnel	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	30 lf
1	Boys Locker Room	Interior Door Caulk, Tan	40 lf
1	Boys Locker Room	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	50 lf
1	Boys Locker Room - Custodial Closet	Interior Door Caulk, Tan	20 lf
1	Boys Locker Room - Custodial Closet	Tagged Fire Door	1 #
1	Boys Locker Room - Custodial Closet	Tagged Fire Door Frame	1 #
1	Boys Locker Room - Office	Interior Door Caulk, Tan	20 lf
1	Boys Locker Room - Office	Interior Window Caulk, Tan	40 lf
1	Boys Locker Room - Office	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	10 lf
1	Cafeteria	Exterior Door Caulk, Interior Side, Tan	40 lf
1	Cafeteria	Interior Door Caulk, Tan	120 lf
1	Cafeteria	Tagged Fire Door	4 #
1	Cafeteria	Tagged Fire Door Frame	4 #
1	Counseling Center	Interior Door Caulk, Tan	20 lf
1	Counseling Center - Conference Room	Interior Door Caulk, Tan	20 lf
1	Counseling Center - Copy Room	Interior Door Caulk, Tan	20 lf
1	Counseling Center - Copy Room	Tagged Fire Door	1 #
1	Counseling Center - Copy Room	Tagged Fire Door Frame	1 #
1	Counseling Center - Office A	Interior Door Caulk, Tan	20 lf
1	Counseling Center - Office B	Interior Door Caulk, Tan	20 lf
1	Counseling Center - Office C	Interior Door Caulk, Tan	20 lf
1	Counseling Center - Office D	Interior Door Caulk, Tan	20 lf
1	Counseling Center - Office E	Interior Door Caulk, Tan	20 lf
1	Counseling Center - Restroom	Interior Door Caulk, Tan	20 lf
1	Gymnasium	Exterior Door Caulk, Interior Side, White	80 lf
1	Gymnasium	Interior Door Caulk, Tan	80 lf
1	Gymnasium	Tectum Wall Panels	900 sf
1	Gymnasium Hallway Boys Restroom	Interior Door Caulk, Tan	20 lf
1	Gymnasium Hallway Girls Restroom	Interior Door Caulk, Tan	20 lf
1	Gymnasium Storage A	Hard Plaster Ceiling Edge Caulk, Tan	60 lf
1	Gymnasium Storage A	Interior Door Caulk, Tan	40 lf
1	Gymnasium Storage A	Tagged Fire Door	2 #
1	Gymnasium Storage A	Tagged Fire Door Frame	1 #
1	Gymnasium/Library Hallway	Exterior Door Caulk, Interior Side, Tan	120 lf
1	Gymnasium/Music Hallway	Exterior Door Caulk, Interior Side, Tan	80 lf
1	Gymnasium/Music Hallway	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	10 lf
1	Kitchen	Interior Door Caulk, Tan	60 lf
1	Kitchen	Tagged Fire Door	1 #
1	Kitchen	Tagged Fire Door Frame	1 #
1	Kitchen - Office	Interior Door Caulk, Tan	40 lf
1	Kitchen - Serving Area	Interior Door Caulk, Tan	60 lf
1	Kitchen - Serving Area	Tagged Fire Door	3 #
1	Kitchen - Serving Area	Tagged Fire Door Frame	3 #
1	Kitchen Hallway - Custodial Closet	Interior Door Caulk, Tan	20 lf
1	Kitchen Hallway - Custodial Closet	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	5 lf
1	Kitchen Hallway - Custodial Closet	Tagged Fire Door	1 #
1	Kitchen Hallway - Custodial Closet	Tagged Fire Door	1 #
1	Kitchen Hallway - Dry Storage	Exterior Door Caulk, Interior Side, Tan	20 lf

1	Kitchen Hallway - Dry Storage	Floor Tile, 9" x 9", Tan with White	300 sf
1	Kitchen Hallway - Dry Storage	Interior Door Caulk, Tan	20 lf
1	Kitchen Hallway - Dry Storage	Tagged Fire Door	1 #
1	Kitchen Hallway - Dry Storage	Tagged Fire Door Frame	1 #
1	Library	Exterior Door Caulk, Interior Side, Grey	40 lf
1	Library	Exterior Window Caulk, Interior Side, Grey	60 lf
1	Library	Exterior Window Glaze, Interior Side, Grey	30 lf
1	Library	Interior Door Caulk, Tan	40 lf
1	Library - Audio Visual	Floor Tile, 9" x 9", Tan with White	280 sf
1	Library - Audio Visual	Interior Door Caulk, Tan	20 lf
1	Library - Office	Interior Door Caulk, Tan	20 lf
1	Main Office	Interior Door Caulk, Tan	40 lf
1	Main Office - Conference Room	Interior Door Caulk, Tan	40 lf
1	Main Office - Copy Room	Interior Door Caulk, Tan	40 lf
1	Main Office - Copy Room	Tagged Fire Door	2 #
1	Main Office - Copy Room	Tagged Fire Door Frame	2 #
1	Main Office - Restroom	Interior Door Caulk, Tan	20 lf
1	Music Room Storage	Floor Tile, 9" x 9", Tan with White	192 sf
1	Music Room Storage	Interior Door Caulk, Tan	20 lf
1	Receiving	Interior Door Caulk, Tan	20 lf
1	Receiving	Tagged Fire Door	2 #
1	Receiving	Tagged Fire Door Frame	1 #
1	Room 102	Exterior Window Caulk, Interior Side, Grey	60 lf
1	Room 102	Floor Tile, 9" x 9", Tan with White	748 sf
1	Room 102	Interior Door Caulk, Tan	20 lf
1	Room 102	Tagged Fire Door	1 #
1	Room 102	Tagged Fire Door Frame	1 #
1	Room 103	Interior Door Caulk, Tan	20 lf
1	Room 104	Exterior Window Caulk, Interior Side, Grey	60 lf
1	Room 104	Floor Tile, 9" x 9", Tan with White	748 sf
1	Room 104	Interior Door Caulk, Tan	20 lf
1	Room 107	Floor Tile, 9" x 9", Tan with White	600 sf
1	Room 107	Interior Door Caulk, Tan	20 lf
1	Room 107	Tagged Fire Door	1 #
1	Room 107	Tagged Fire Door Frame	1 #
1	Room 107 - Storage	Interior Door Caulk, Tan	20 lf
1	Room 107 - Storage	Tagged Fire Door	1 #
1	Room 107 - Storage	Tagged Fire Door Frame	1 #
1	Room 108	Interior Door Caulk, Tan	20 lf
1	Room 108	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	20 lf
1	Room 108 - Storage A	Interior Door Caulk, Tan	20 lf
1	Room 108 - Storage A	Tagged Fire Door	1 #
1	Room 108 - Storage A	Tagged Fire Door Frame	1 #
1	Room 108 - Storage B	Interior Door Caulk, Tan	20 lf
1	Room 108 - Storage B	Tagged Fire Door	1 #
1	Room 108 - Storage B	Tagged Fire Door Frame	1 #
1	Room 109	Exterior Window Caulk, Interior Side, Grey	40 lf
1	Room 109	Exterior Window Glaze, Interior Side, Grey	60 lf
1	Room 109	Floor Tile, 9" x 9", Tan with White	952 sf
1	Room 109	Interior Door Caulk, Tan	20 lf
1	Room 109	Sink Undercoating, Black	2 #
1	Room 110	Exterior Window Caulk, Interior Side, Grey	40 lf
1	Room 110	Exterior Window Glaze, Interior Side, Grey	60 lf
1	Room 110	Floor Tile, 9" x 9", Tan with White	952 sf
1	Room 110	Interior Door Caulk, Tan	20 lf
1	Room 110	Sink Undercoating, Black	2 #
1	Room 111	Exterior Window Caulk, Interior Side, Grey	40 lf
1	Room 111	Exterior Window Glaze, Interior Side, Grey	20 lf
1	Room 111	Floor Tile, 9" x 9", Tan with White	784 sf
1	Room 111	Interior Door Caulk, Tan	20 lf
1	Room 112	Exterior Window Caulk, Interior Side, Grey	40 lf
1	Room 112	Exterior Window Glaze, Interior Side, Grey	20 lf
1	Room 112	Floor Tile, 9" x 9", Tan with White	784 sf
1	Room 112	Interior Door Caulk, Tan	20 lf
1	Room 113	Exterior Window Caulk, Interior Side, Grey	40 lf
1	Room 113	Exterior Window Glaze, Interior Side, Grey	20 lf

1	Room 113	Floor Tile, 9" x 9", Tan with White	784 sf
1	Room 113	Interior Door Caulk, Tan	20 lf
1	Room 114	Exterior Window Caulk, Interior Side, Grey	40 lf
1	Room 114	Exterior Window Glaze, Interior Side, Grey	20 lf
1	Room 114	Floor Tile, 9" x 9", Tan with White	784 sf
1	Room 114	Interior Door Caulk, Tan	20 lf
1	Room 115	Exterior Window Caulk, Interior Side, Grey	40 lf
1	Room 115	Exterior Window Glaze, Interior Side, Grey	20 lf
1	Room 115	Floor Tile, 9" x 9", Tan with White	784 sf
1	Room 115	Interior Door Caulk, Tan	20 lf
1	Room 116	Exterior Window Caulk, Interior Side, Grey	40 lf
1	Room 116	Exterior Window Glaze, Interior Side, Grey	20 lf
1	Room 116	Floor Tile, 9" x 9", Tan with White	784 sf
1	Room 116	Interior Door Caulk, Tan	20 lf
1	Room 116A	Floor Tile, 9" x 9", Tan with White	144 sf
1	Room 116A	Interior Door Caulk, Tan	20 lf
1	Room 116A	Tagged Fire Door	1 #
1	Room 117	Exterior Door Caulk, Interior Side, Tan	20 lf
1	Room 117	Floor Tile, 9" x 9", Tan with White	1,224 sf
1	Room 117	Interior Door Caulk, Tan	40 lf
1	Room 117A	Interior Door Caulk, Tan	20 lf
1	Room 118	Exterior Door Caulk, Interior Side, Tan	20 lf
1	Room 118	Floor Tile, 9" x 9", Tan with White	1,224 sf
1	Room 118	Interior Door Caulk, Tan	40 lf
1	Room 118 - Corridor	Floor Tile, 9" x 9", Tan with White	180 sf
1	Room 118 - Storage A	Exterior Window Caulk, Interior Side, Grey	20 lf
1	Room 118 - Storage A	Floor Tile, 9" x 9", Tan with White	48 sf
1	Room 118 - Storage A	Interior Door Caulk, Tan	20 lf
1	Room 118 - Storage B	Exterior Window Caulk, Interior Side, Grey	20 lf
1	Room 118 - Storage B	Floor Tile, 9" x 9", Tan with White	48 sf
1	Room 118 - Storage B	Interior Door Caulk, Tan	20 lf
1	Room 118 - Storage C	Exterior Window Caulk, Interior Side, Grey	20 lf
1	Room 118 - Storage C	Floor Tile, 9" x 9", Tan with White	48 sf
1	Room 118 - Storage C	Interior Door Caulk, Tan	20 lf
1	Room 118 - Storage D	Exterior Window Caulk, Interior Side, Grey	20 lf
1	Room 118 - Storage D	Floor Tile, 9" x 9", Tan with White	48 sf
1	Room 118 - Storage D	Interior Door Caulk, Tan	20 lf
1	Room 98	Interior Door Caulk, Tan	40 lf
1	Stage	Exterior Door Caulk, Interior Side, Tan	20 lf
1	Stage	Floor Tile, 9" x 9", Tan with White	40 sf
1	Stage	Interior Door Caulk, Tan	20 lf
1	Stage	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	5 lf
1	Stage	Tagged Fire Door	1 #
1	Stage	Tagged Fire Door Frame	1 #
1	Stage Hallway Storage	Interior Door Caulk, Tan	20 lf
1	Stage Hallway Storage	Tagged Fire Door	1 #
1	Stage Hallway Storage	Tagged Fire Door Frame	1 #
1	Stage Storage	Interior Door Caulk, Tan	20 lf
1	Stage Storage	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	2 lf
1	Stage Storage	Tagged Fire Door	1 #
1	Stage Storage	Tagged Fire Door Frame	1 #
1	Ticket Booth	Floor Tile, 9" x 9", Tan with Grey	50 sf
1	Ticket Booth	Interior Door Caulk, Tan	20 lf
1	Ticket Booth	Interior Window Caulk, Tan	10 lf
1	Varsity	Interior Door Caulk, Tan	20 lf
1	Varsity	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	10 lf
2	Dark Room	Interior Door Caulk, Tan	20 lf
2	Dark Room	Tagged Fire Door	1 #
2	Dark Room	Tagged Fire Door Frame	1 #
2	East Stairwell	Exterior Door Caulk, Interior Side, Grey	40 lf
2	East Stairwell	Exterior Window Caulk, Interior Side, Grey	40 lf
2	East Stairwell	Exterior Window Glaze, Interior Side, Grey	20 lf
2	East Stairwell	Interior Door Caulk, Tan	120 lf
2	East Stairwell	Tagged Fire Door	4 #
2	East Stairwell	Tagged Fire Door Frame	4 #
2	Office near Second Floor Boys Restroom	Floor Tile, 9" x 9", Tan with White	180 sf

2	Office near Second Floor Boys Restroom	Interior Door Caulk, Tan	20	If
2	Room 200	Exterior Window Caulk, Interior Side, Grey	40	If
2	Room 200	Exterior Window Glaze, Interior Side, Grey	20	If
2	Room 200	Interior Door Caulk, Tan	40	If
2	Room 201	Exterior Window Caulk, Interior Side, Grey	40	If
2	Room 201	Exterior Window Glaze, Interior Side, Grey	20	If
2	Room 201	Interior Door Caulk, Tan	40	If
2	Room 202	Exterior Window Caulk, Interior Side, Grey	40	If
2	Room 202	Exterior Window Glaze, Interior Side, Grey	20	If
2	Room 202	Interior Door Caulk, Tan	40	If
2	Room 203	Exterior Window Caulk, Interior Side, Grey	60	If
2	Room 203	Exterior Window Glaze, Interior Side, Grey	30	If
2	Room 203	Interior Door Caulk, Tan	40	If
2	Room 204	Exterior Window Caulk, Interior Side, Grey	80	If
2	Room 204	Exterior Window Glaze, Interior Side, Grey	40	If
2	Room 204	Interior Door Caulk, Tan	40	If
2	Room 205	Exterior Window Caulk, Interior Side, Grey	60	If
2	Room 205	Exterior Window Glaze, Interior Side, Grey	30	If
2	Room 205	Interior Door Caulk, Tan	40	If
2	Room 206	Interior Door Caulk, Tan	20	If
2	Room 206	Interior Window Caulk, Tan	80	If
2	Room 206/207 Storage	Interior Door Caulk, Tan	40	If
2	Room 206/207 Storage	Tagged Fire Door	2	#
2	Room 206/207 Storage	Tagged Fire Door Frame	2	#
2	Room 207	Interior Door Caulk, Tan	40	If
2	Room 208	Interior Door Caulk, Tan	20	If
2	Room 209	Interior Door Caulk, Tan	40	If
2	Room 209	Interior Window Caulk, Tan	60	If
2	Room 209A	Interior Door Caulk, Tan	40	If
2	Room 210	Exterior Window Caulk, Interior Side, Grey	40	If
2	Room 210	Exterior Window Glaze, Interior Side, Grey	20	If
2	Room 210	Interior Door Caulk, Tan	20	If
2	Room 211	Exterior Window Caulk, Interior Side, Grey	40	If
2	Room 211	Exterior Window Glaze, Interior Side, Grey	20	If
2	Room 211	Interior Door Caulk, Tan	20	If
2	Room 212	Exterior Window Caulk, Interior Side, Grey	40	If
2	Room 212	Exterior Window Glaze, Interior Side, Grey	20	If
2	Room 212	Interior Door Caulk, Tan	20	If
2	Room 214	Exterior Window Caulk, Interior Side, Grey	60	If
2	Room 214	Exterior Window Glaze, Interior Side, Grey	30	If
2	Room 214	Interior Door Caulk, Tan	20	If
2	Room 215	Exterior Window Caulk, Interior Side, Grey	60	If
2	Room 215	Exterior Window Glaze, Interior Side, Grey	30	If
2	Room 215	Interior Door Caulk, Tan	20	If
2	Room 215/214 Storage	Interior Door Caulk, Tan	40	If
2	Second Floor Boys Restroom	Interior Door Caulk, Tan	20	If
2	Second Floor Custodial Closet	Interior Door Caulk, Tan	20	If
2	Second Floor Custodial Closet	Tagged Fire Door	1	#
2	Second Floor Custodial Closet	Tagged Fire Door Frame	1	#
2	Second Floor East Hallway	Exterior Window Caulk, Interior Side, Grey	120	If
2	Second Floor East Hallway	Exterior Window Glaze, Interior Side, Grey	60	If
2	Second Floor East Hallway	Interior Window Caulk, Tan	80	If
2	Second Floor Faculty Copy Room	Interior Door Caulk, Tan	20	If
2	Second Floor Faculty Copy Room	Tagged Fire Door	1	#
2	Second Floor Faculty Copy Room	Tagged Fire Door Frame	1	#
2	Second Floor Faculty Restroom	Interior Door Caulk, Tan	20	If
2	Second Floor Girls Restroom	Interior Door Caulk, Tan	20	If
2	Second Floor Mechanical Room	Tagged Fire Door	1	#
2	Second Floor Mechanical Room	Tagged Fire Door Frame	1	#
2	Second Floor West Hallway	Exterior Window Caulk, Interior Side, Grey	120	If
2	Second Floor West Hallway	Exterior Window Glaze, Interior Side, Grey	60	If
2	Second Floor West Hallway	Interior Window Caulk, Tan	60	If
2	West Stairwell	Exterior Door Caulk, Interior Side, Grey	40	If
2	West Stairwell	Exterior Window Caulk, Interior Side, Grey	40	If
2	West Stairwell	Exterior Window Glaze, Interior Side, Grey	20	If
2	West Stairwell	Interior Door Caulk, Tan	120	If

2	West Stairwell	Tagged Fire Door	4 #
2	West Stairwell	Tagged Fire Door Frame	4 #

Inaccessible Materials:

There may be additional quantities of suspect asbestos containing materials, which were not identified or sampled as a part of the inspection, in various inaccessible locations, such as inside wall cavities, inside wall construction materials (between cinder block or brick, especially around water sources) and above inaccessible ceilings (such as drywall or plaster). If suspect pipe insulation is found, please contact the Accredited Asbestos Inspector, Ms. Tiffany Fell, AEG, at (248) 426-0165.



APPENDIX B

FLOOR PLANS INDICATING LOCATIONS OF ASBESTOS-CONTAINING MATERIALS


FLOOR PLANS INDICATING LOCATIONS OF ASBESTOS-CONTAINING MATERIALS

AEG prepared several floor plans for the Thompson K-8 International Academy located at 16300 Lincoln Drive, Southfield, Michigan 48076 for Southfield Public Schools to illustrate the approximate locations of certain asbestos-containing materials. Floor plans include:



Map #	Map Name	Page #
1	Thompson K-8 International Academy – Building Floor Plan	15
2	Thompson K-8 International Academy – Asbestos Flooring Materials	16
3	Thompson K-8 International Academy – Asbestos Interior Door Caulk	17
4	Thompson K-8 International Academy – Asbestos Window Caulk, Window Glazing and Sinks	18
5	Thompson K-8 International Academy – Assumed Asbestos Containing Materials	19
6	Thompson K-8 International Academy – Tagged Fire Doors and Frames	20
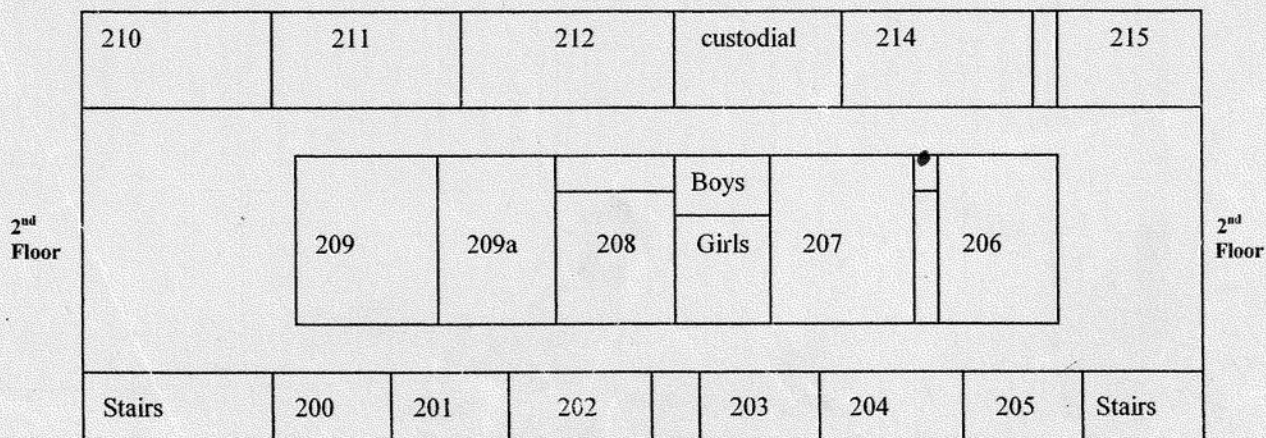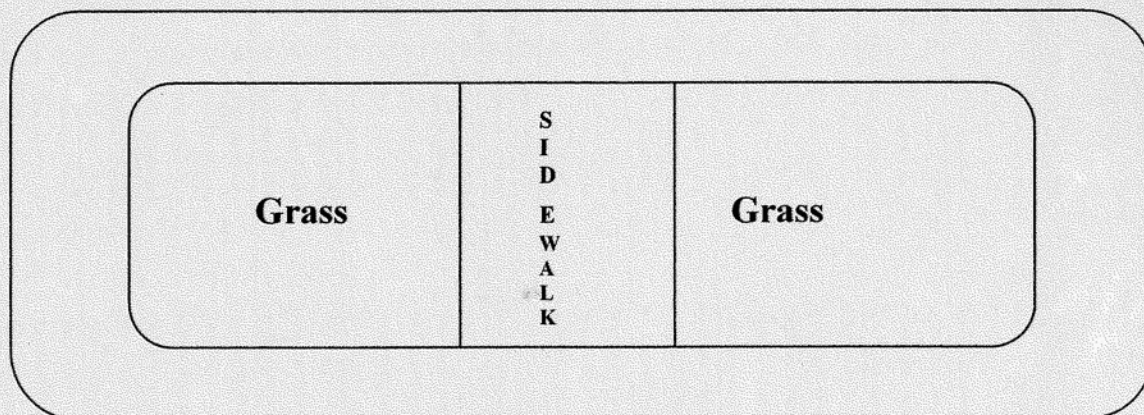
$$N \geq$$


**Thompson
Middle
School-Floor Plan**

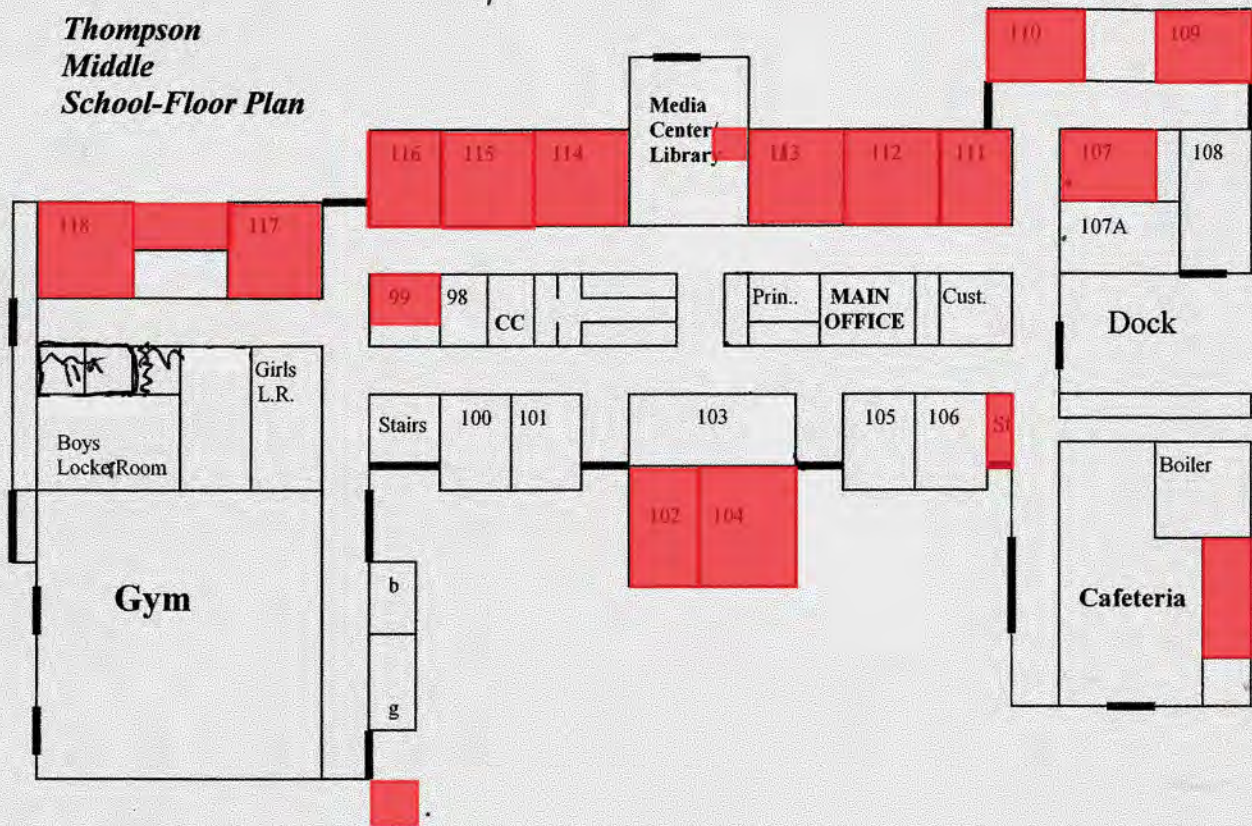


Entry/Exit Doors

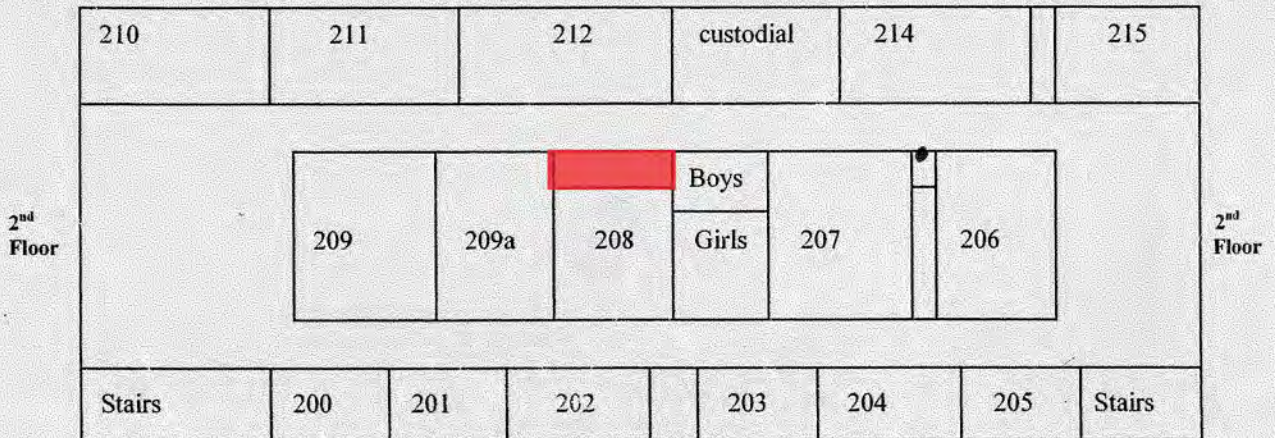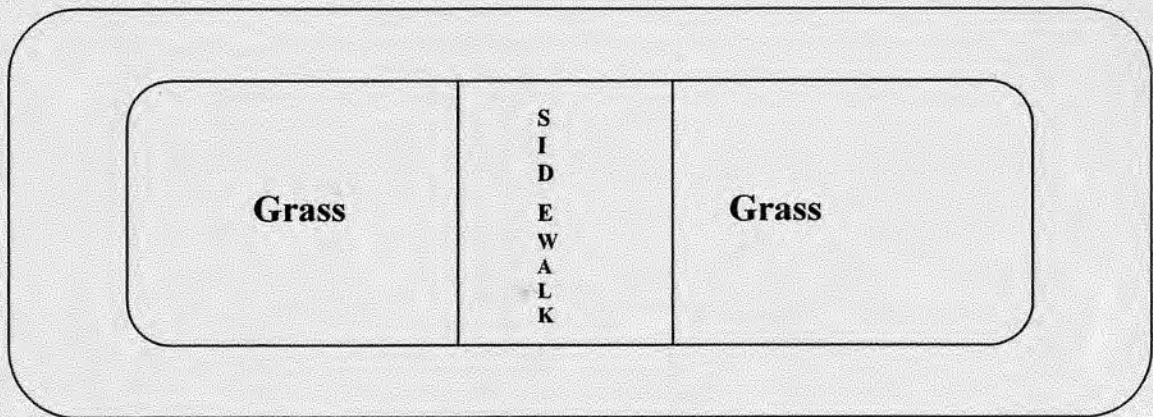



ACM Door Caulk




**Thompson
Middle
School-Floor Plan**

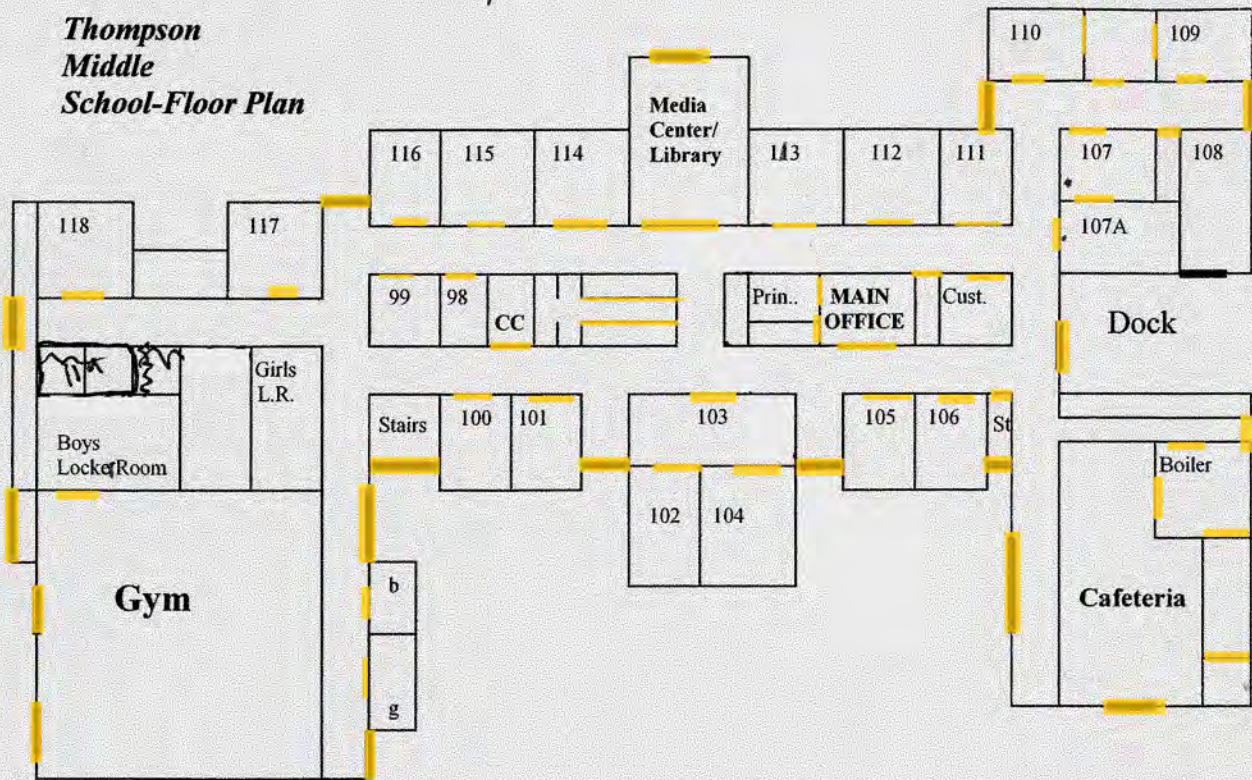



Entry/Exit Doors

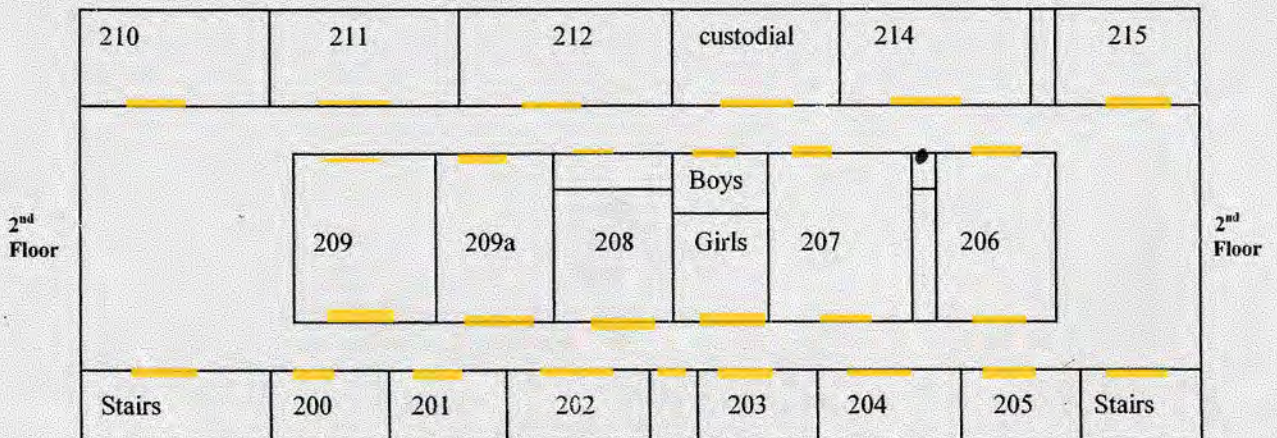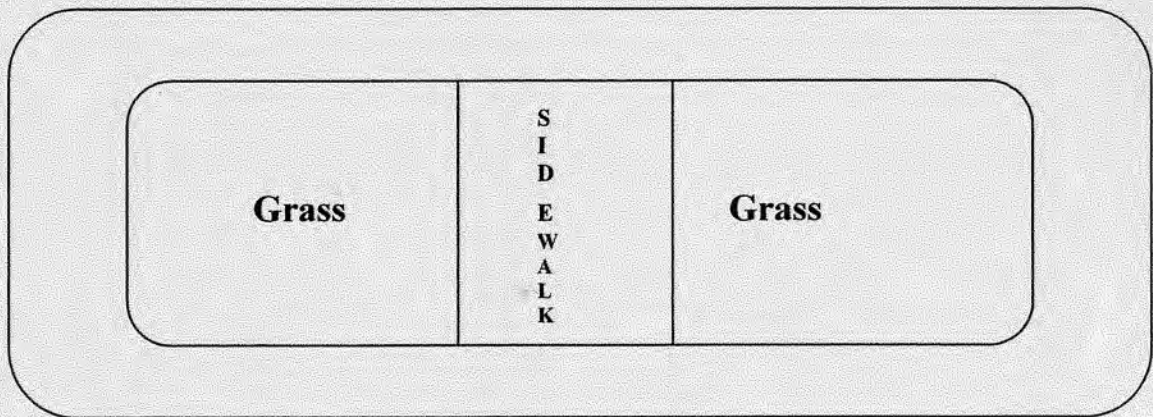


**Thompson
Middle
School-Floor Plan**

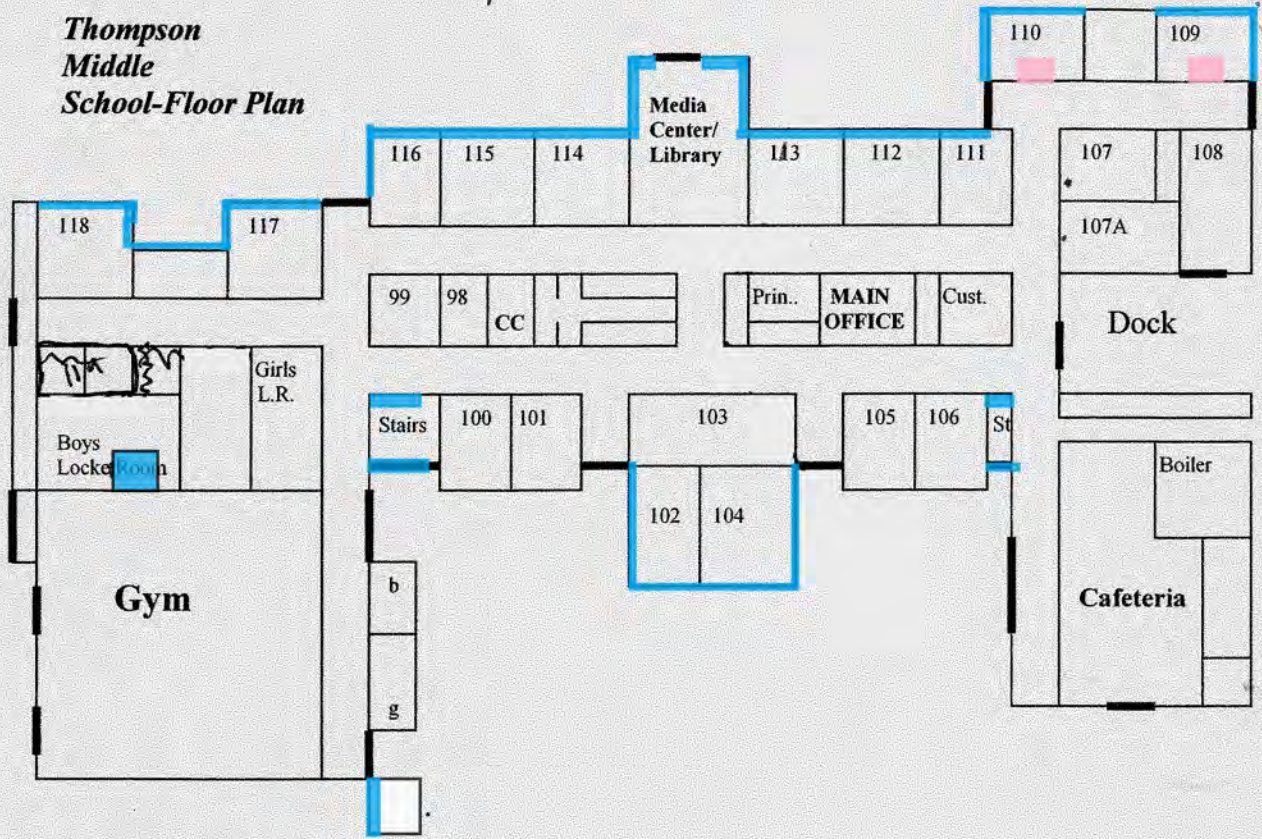



Entry/Exit Doors

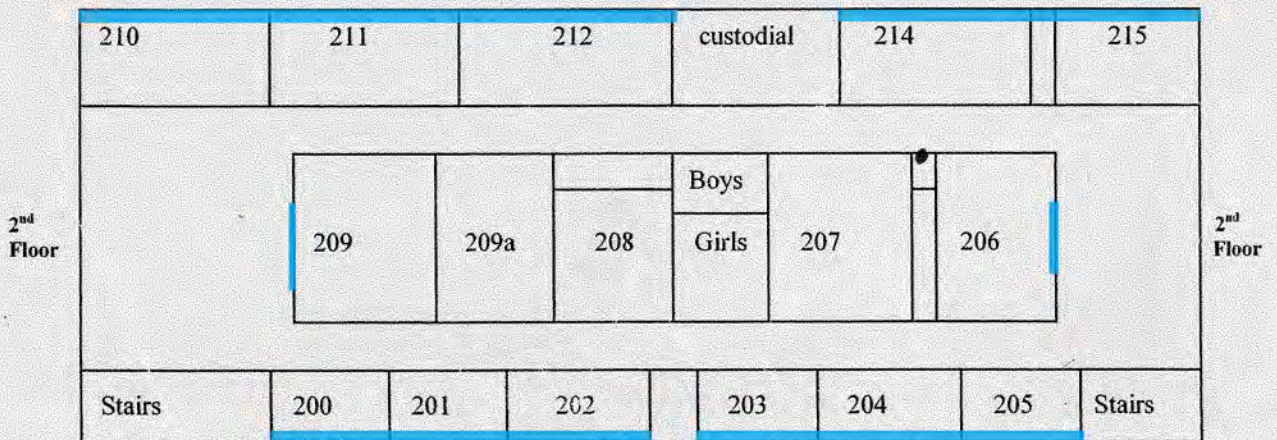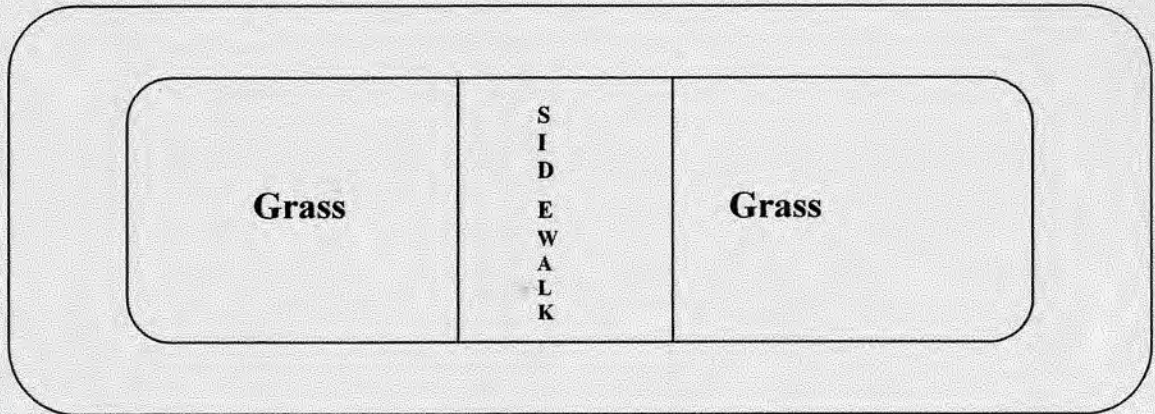

**Thompson
Middle
School-Floor Plan**

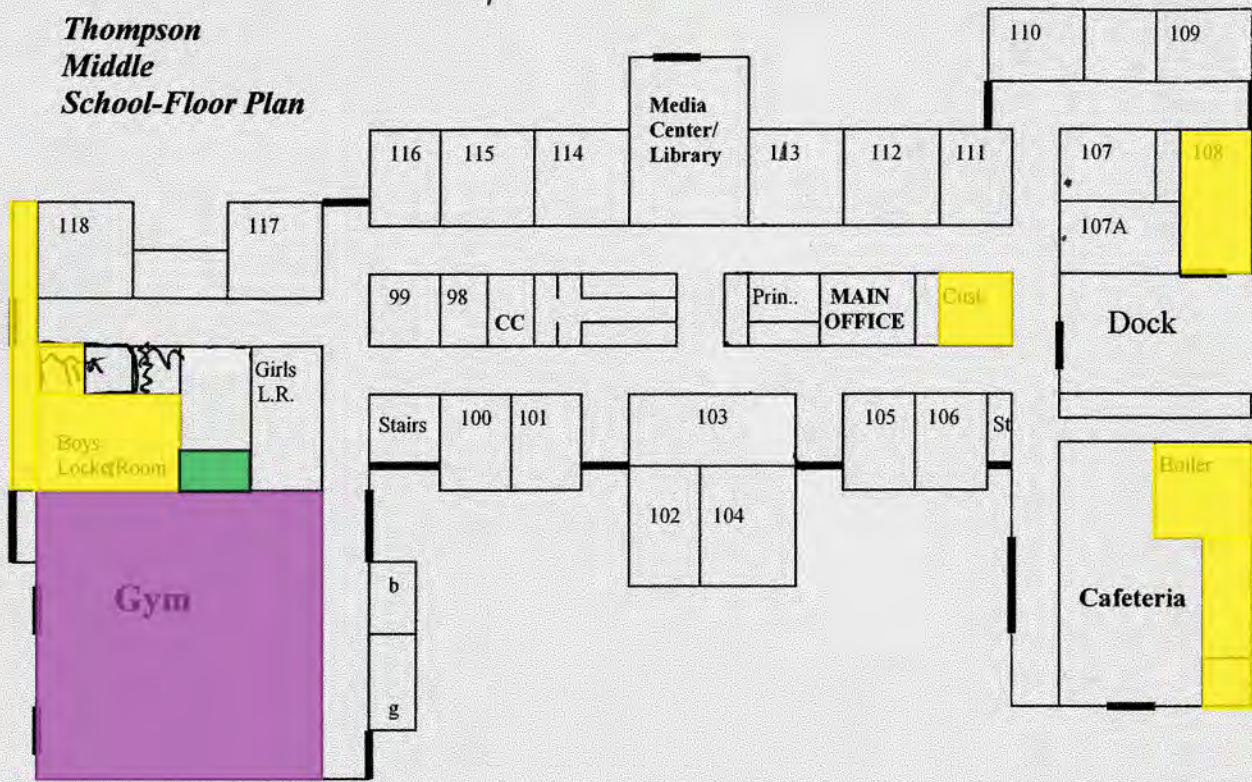


Entry/Exit Doors

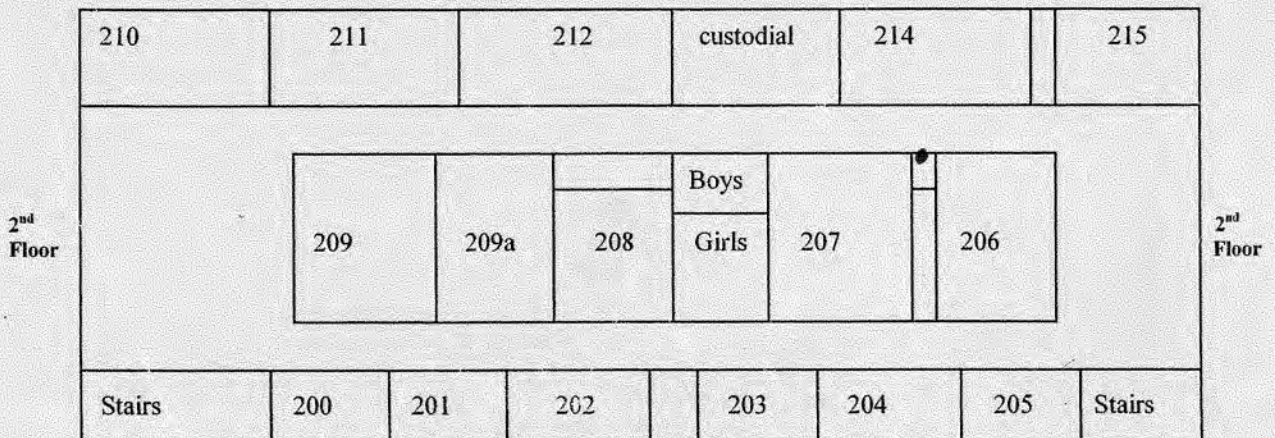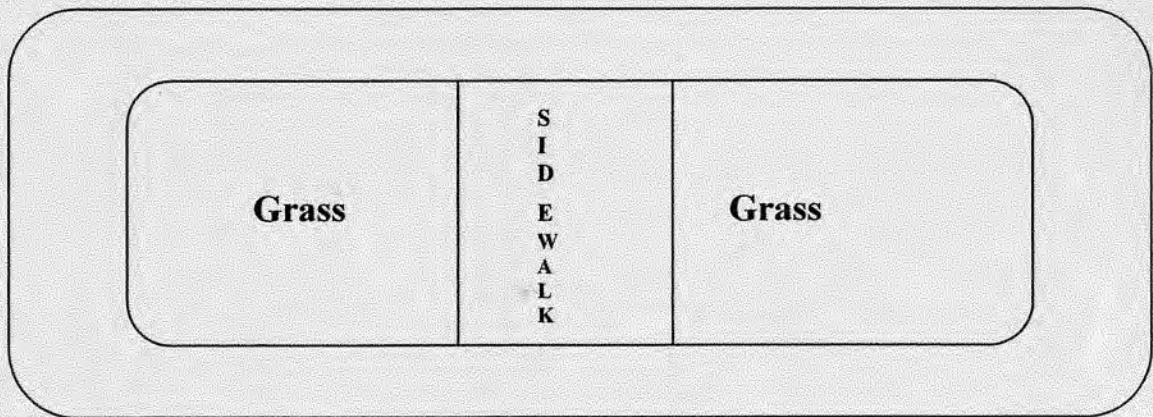



Assumed Fire Door/Frame



**Thompson
Middle
School-Floor Plan**

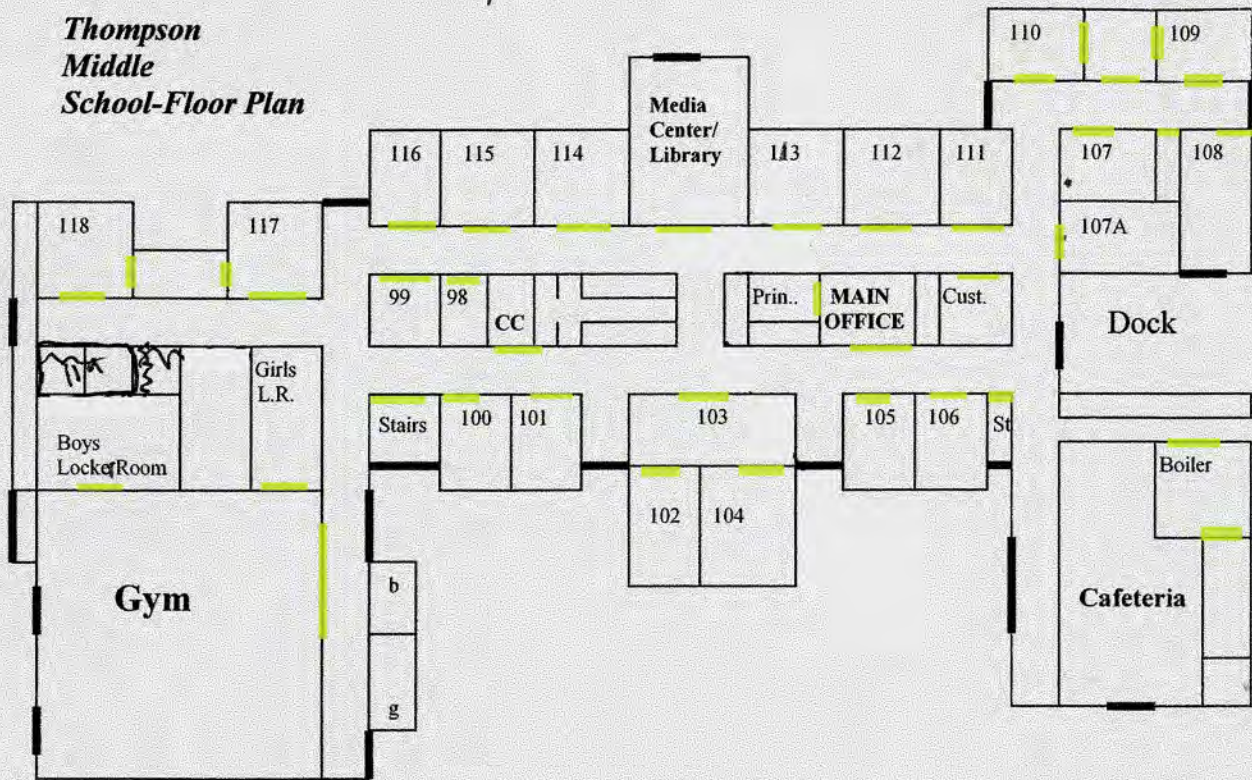

Entry/Exit Doors

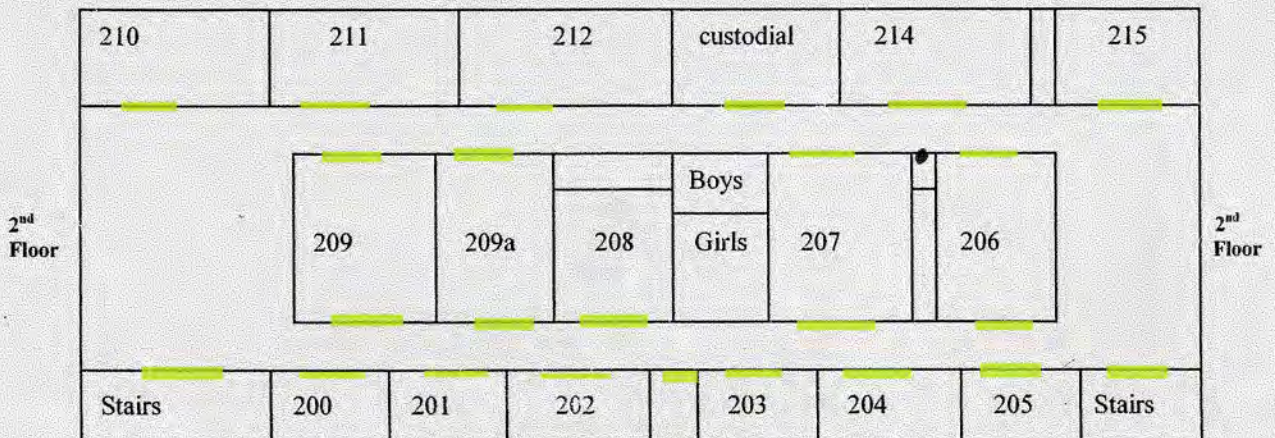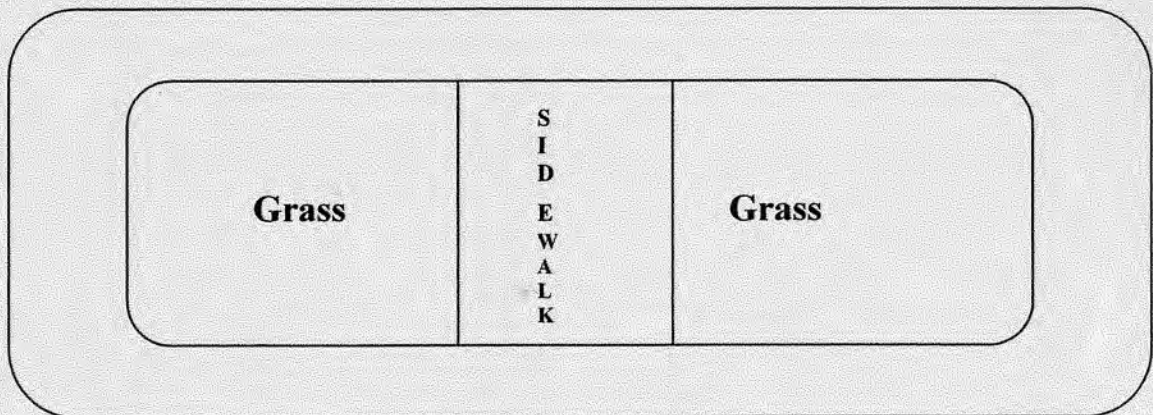

APPENDIX C

Tables of ACM/Non-ACM

TABLES OF ACM/NON-ACM

The following tables provide a listing by building area showing the locations of all asbestos-containing materials and non-asbestos-containing materials. There are two (2) tables provided: one (1) sorted by location (functional space) and one (1) sorted by material (homogeneous area). Each table includes the following information for each functional space:

- Floor
- Functional Space Name
- Material Description
- ACM – Does the material contain asbestos?
- Category – Is the material a surfacing material (S), thermal system insulation (TSI) or a miscellaneous material (M)?
- Friable – Is the material friable (F) or non-friable (NF)?
- Quantity – Approximate quantity of the material present in the functional space.
- Notes – Additional information about the material
- Status – Is the asbestos material present?

Asbestos-Containing Materials

Quantity

Surfacing Materials

None

Thermal System Insulation

None

Miscellaneous Materials

Exterior Door Caulk, Interior Side, Grey	120 lf
Exterior Door Caulk, Interior Side, Tan	440 lf
Exterior Door Caulk, Interior Side, White	80 lf
Exterior Window Caulk, Interior Side, Grey	1,460 lf
Exterior Window Glaze, Interior Side, Grey	710 lf
Floor Tile, 9" x 9", Tan with Grey	50 sf
Floor Tile, 9" x 9", Tan with White	12,660 sf
Interior Door Caulk, Tan	2,680 lf
Interior Window Caulk, Tan	330 lf
Sink Undercoating, Black	4 #

Assumed Asbestos-Containing Materials

Quantity

Surfacing Materials

None

Thermal System Insulation

Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	142 lf
---	--------

Miscellaneous Materials

Hard Plaster Ceiling Edge Caulk, Tan	60 lf
Tagged Fire Door	45 #
Tagged Fire Door Frame	40 #
Tectum Wall Panels	900 sf

Non-Asbestos-Containing MaterialsQuantity*Surfacing Materials*

Exterior Overhang	4,000 sf
Exterior Pebble Fascia	20,000 sf
Hard Plaster Ceiling, Rough Texture, Brown Coat	2,926 sf
Hard Plaster Ceiling, Rough Texture, Finish Coat	2,926 sf
Hard Plaster Ceiling, Smooth, Brown Coat	2,068 sf
Hard Plaster Ceiling, Smooth, Finish Coat	2,068 sf
Hard Plaster Wall, Rough Texture, Brown Coat	560 sf
Hard Plaster Wall, Rough Texture, Finish Coat	560 sf
Hard Plaster Wall, Smooth, Brown Coat	7,788 sf
Hard Plaster Wall, Smooth, Finish Coat	7,788 sf

Thermal System Insulation

Straight Pipe Insulation, Fiberglass with Canvas Wrap	2,315 lf
---	----------

Miscellaneous Materials

Floor Tile Mastic, 12" x 12", Cream with Tan	904 sf
Floor Tile Mastic, 12" x 12", Grey Mottled	892 sf
Floor Tile Mastic, 12" x 12", White with Grey	1,408 sf
Floor Tile Mastic, 9" x 9", Tan with Grey	50 sf
Floor Tile Mastic, 9" x 9", Tan with White	12,660 sf
Floor Tile, 12" x 12", Blue Mottled	2,216 sf
Floor Tile, 12" x 12", Cream Mottled	18,396 sf
Floor Tile, 12" x 12", Cream with Tan	904 sf
Floor Tile, 12" x 12", Grey Mottled	892 sf
Floor Tile, 12" x 12", White with Grey	1,408 sf
HVAC Vibration Dampener, Black	80 sf
Interior Door Caulk, White	20 lf
Interior Door Window Glaze, Grey	930 lf
Interior Door Window Glaze, White	80 lf
Interior Window Glaze, White	170 lf
Lab Sink	19 #
Lay-in Ceiling Tile, 2' x 2', Dots and Gouges	864 sf
Lay-in Ceiling Tile, 2' x 2', Drywall	3,672 sf
Lay-in Ceiling Tile, 2' x 2', Textured	47,104 sf
Sink Undercoating, Grey	3 #

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Art Hallway	Cinderblock	---	---	---	---		
1	Art Hallway	Concrete	---	---	---	---		
1	Art Hallway	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	80 lf	1	Present
1	Art Hallway	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	780 sf		
1	Art Hallway	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	200 lf		
1	Art Hallway	Tectum Deck	No	Miscellaneous	Non-Friable	780 sf		
1	Art Hallway	Terrazzo Floor	---	---	---	---		
1	Boiler Room	Cinderblock	---	---	---	---		
1	Boiler Room	Concrete	---	---	---	---		
1	Boiler Room	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Boiler Room	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Boiler Room	Straight Pipe Insulation, New Fiberglass	---	---	---	---		
1	Boiler Room	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Boiler Room	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Boiler Room	Tectum Deck	No	Miscellaneous	Non-Friable	1,496 sf		
1	Boiler Room - Laundry	Cinderblock	---	---	---	---		
1	Boiler Room - Laundry	Concrete	---	---	---	---		
1	Boiler Room - Laundry	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Boiler Room - Laundry	Straight Pipe Insulation, New Fiberglass	---	---	---	---		
1	Boiler Room - Laundry	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Boiler Room - Laundry	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Boiler Room - Laundry	Tectum Deck	No	Miscellaneous	Non-Friable	120 sf		
1	Boiler Room - Storage	Cinderblock	---	---	---	---		
1	Boiler Room - Storage	Concrete	---	---	---	---		
1	Boiler Room - Storage	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Boiler Room - Storage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Boiler Room - Storage	Straight Pipe Insulation, New Fiberglass	---	---	---	---		
1	Boiler Room - Storage	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Boiler Room - Storage	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Boiler Room - Storage	Tectum Deck	No	Miscellaneous	Non-Friable	320 sf		
1	Boiler Room - Tunnel	Concrete	---	---	---	---		
1	Boiler Room - Tunnel	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	30 lf		Present
1	Boiler Room - Tunnel	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	400 lf		
1	Boys Locker Room	Ceramic Floor	---	---	---	---		
1	Boys Locker Room	Cinderblock	---	---	---	---		
1	Boys Locker Room	Concrete	---	---	---	---		
1	Boys Locker Room	Hard Plaster Ceiling, Rough Texture, Brown Coat	No	Surfacing	Non-Friable	2,040 sf		
1	Boys Locker Room	Hard Plaster Ceiling, Rough Texture, Finish Coat	No	Surfacing	Non-Friable	2,040 sf		
1	Boys Locker Room	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Boys Locker Room	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	50 lf		Present
1	Boys Locker Room	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	300 lf		
1	Boys Locker Room - Custodial Closet	Cinderblock	---	---	---	---		
1	Boys Locker Room - Custodial Closet	Concrete	---	---	---	---		
1	Boys Locker Room - Custodial Closet	Hard Plaster Ceiling, Rough Texture, Brown Coat	No	Surfacing	Non-Friable	80 sf		
1	Boys Locker Room - Custodial Closet	Hard Plaster Ceiling, Rough Texture, Finish Coat	No	Surfacing	Non-Friable	80 sf		

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Boys Locker Room - Custodial Closet	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Boys Locker Room - Custodial Closet	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	10 lf		
1	Boys Locker Room - Custodial Closet	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Boys Locker Room - Custodial Closet	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Boys Locker Room - Mezzanine	Cinderblock	---	---	---	---		
1	Boys Locker Room - Mezzanine	Concrete	---	---	---	---		
1	Boys Locker Room - Mezzanine	Duct Insulation, Fiberglass	---	---	---	---		
1	Boys Locker Room - Mezzanine	Duct Sealant, Grey	No	Miscellaneous	Non-Friable	20 lf		
1	Boys Locker Room - Mezzanine	HVAC Vibration Dampener, Black	No	Miscellaneous	Non-Friable	60 sf		
1	Boys Locker Room - Mezzanine	Straight Pipe Insulation, New Fiberglass	---	---	---	---		
1	Boys Locker Room - Mezzanine	Tectum Deck	No	Miscellaneous	Non-Friable	1,900 sf		
1	Boys Locker Room - Office	Ceramic Floor	---	---	---	---		
1	Boys Locker Room - Office	Cinderblock	---	---	---	---		
1	Boys Locker Room - Office	Concrete	---	---	---	---		
1	Boys Locker Room - Office	Hard Plaster Ceiling, Rough Texture, Brown Coat	No	Surfacing	Non-Friable	180 sf		
1	Boys Locker Room - Office	Hard Plaster Ceiling, Rough Texture, Finish Coat	No	Surfacing	Non-Friable	180 sf		
1	Boys Locker Room - Office	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Boys Locker Room - Office	Interior Window Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Boys Locker Room - Office	Interior Window Glaze, White	No	Miscellaneous	Non-Friable	30 lf	2	
1	Boys Locker Room - Office	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	10 lf		Present
1	Boys Locker Room - Office	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	50 lf		
1	Cafeteria	Cinderblock	---	---	---	---		
1	Cafeteria	Concrete	---	---	---	---		
1	Cafeteria	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Cafeteria	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	600 sf		
1	Cafeteria	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	600 sf		
1	Cafeteria	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	120 lf	1	Present
1	Cafeteria	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	3,472 sf		
1	Cafeteria	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	4 #		Present
1	Cafeteria	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	4 #		Present
1	Counseling Center	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	360 sf		
1	Counseling Center	Cinderblock	---	---	---	---		
1	Counseling Center	Concrete	---	---	---	---		
1	Counseling Center	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	80 lf	3	
1	Counseling Center	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	80 lf	3	
1	Counseling Center	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	800 sf		
1	Counseling Center	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	800 sf		
1	Counseling Center	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Counseling Center	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	360 sf		
1	Counseling Center - Conference Room	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	140 sf		
1	Counseling Center - Conference Room	Cinderblock	---	---	---	---		
1	Counseling Center - Conference Room	Concrete	---	---	---	---		
1	Counseling Center - Conference Room	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	48 lf	3	
1	Counseling Center - Conference Room	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	48 lf	3	

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Counseling Center - Conference Room	Drywall	No	Miscellaneous	Non-Friable	100 sf		
1	Counseling Center - Conference Room	Drywall Mud	No	Miscellaneous	Non-Friable	100 sf		
1	Counseling Center - Conference Room	Drywall Tape	No	Miscellaneous	Non-Friable	100 sf		
1	Counseling Center - Conference Room	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	240 sf		
1	Counseling Center - Conference Room	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	240 sf		
1	Counseling Center - Conference Room	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center - Conference Room	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	140 sf		
1	Counseling Center - Copy Room	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	120 sf		
1	Counseling Center - Copy Room	Cinderblock	---	---	---	---		
1	Counseling Center - Copy Room	Concrete	---	---	---	---		
1	Counseling Center - Copy Room	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	44 lf	3	
1	Counseling Center - Copy Room	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	44 lf	3	
1	Counseling Center - Copy Room	Drywall	No	Miscellaneous	Non-Friable	120 sf		
1	Counseling Center - Copy Room	Drywall Mud	No	Miscellaneous	Non-Friable	120 sf		
1	Counseling Center - Copy Room	Drywall Tape	No	Miscellaneous	Non-Friable	120 sf		
1	Counseling Center - Copy Room	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	220 sf		
1	Counseling Center - Copy Room	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	220 sf		
1	Counseling Center - Copy Room	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center - Copy Room	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	120 sf		
1	Counseling Center - Copy Room	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Counseling Center - Copy Room	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Counseling Center - Office A	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	140 sf		
1	Counseling Center - Office A	Cinderblock	---	---	---	---		
1	Counseling Center - Office A	Concrete	---	---	---	---		
1	Counseling Center - Office A	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	48 lf	3	
1	Counseling Center - Office A	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	48 lf	3	
1	Counseling Center - Office A	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	240 sf		
1	Counseling Center - Office A	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	240 sf		
1	Counseling Center - Office A	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center - Office A	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Counseling Center - Office A	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	140 sf		
1	Counseling Center - Office B	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	140 sf		
1	Counseling Center - Office B	Cinderblock	---	---	---	---		
1	Counseling Center - Office B	Concrete	---	---	---	---		
1	Counseling Center - Office B	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	48 lf	3	
1	Counseling Center - Office B	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	48 lf	3	
1	Counseling Center - Office B	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	240 sf		
1	Counseling Center - Office B	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	240 sf		
1	Counseling Center - Office B	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center - Office B	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Counseling Center - Office B	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	140 sf		
1	Counseling Center - Office C	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	140 sf		
1	Counseling Center - Office C	Cinderblock	---	---	---	---		
1	Counseling Center - Office C	Concrete	---	---	---	---		
1	Counseling Center - Office C	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	48 lf	3	

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Counseling Center - Office C	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	48 lf	3	
1	Counseling Center - Office C	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	240 sf		
1	Counseling Center - Office C	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	240 sf		
1	Counseling Center - Office C	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center - Office C	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Counseling Center - Office C	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	140 sf		
1	Counseling Center - Office D	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	80 sf		
1	Counseling Center - Office D	Cinderblock	---	---	---	---		
1	Counseling Center - Office D	Concrete	---	---	---	---		
1	Counseling Center - Office D	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	36 lf	3	
1	Counseling Center - Office D	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	36 lf	3	
1	Counseling Center - Office D	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	80 sf		
1	Counseling Center - Office D	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	80 sf		
1	Counseling Center - Office D	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center - Office D	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	80 sf		
1	Counseling Center - Office E	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	80 sf		
1	Counseling Center - Office E	Cinderblock	---	---	---	---		
1	Counseling Center - Office E	Concrete	---	---	---	---		
1	Counseling Center - Office E	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	36 lf	3	
1	Counseling Center - Office E	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	36 lf	3	
1	Counseling Center - Office E	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	80 sf		
1	Counseling Center - Office E	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	80 sf		
1	Counseling Center - Office E	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center - Office E	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	80 sf		
1	Counseling Center - Restroom	Ceramic Floor	---	---	---	---		
1	Counseling Center - Restroom	Cinderblock	---	---	---	---		
1	Counseling Center - Restroom	Concrete	---	---	---	---		
1	Counseling Center - Restroom	Drywall Ceiling	No	Miscellaneous	Non-Friable	64 sf		
1	Counseling Center - Restroom	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	160 sf		
1	Counseling Center - Restroom	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	160 sf		
1	Counseling Center - Restroom	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center - Restroom	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	64 sf		
1	Exterior	Concrete Overhang	---	---	---	---		
1	Exterior	Exterior Door Caulk, Exterior Side, Grey	No	Miscellaneous	Non-Friable	640 lf	1	
1	Exterior	Exterior Vent Caulk, Grey	No	Miscellaneous	Non-Friable	350 lf	1	
1	Exterior	Exterior Wall Joint Caulk, White	No	Miscellaneous	Non-Friable	640 lf	1	
1	Exterior	Exterior Window Caulk, Exterior Side, Grey	No	Miscellaneous	Non-Friable	1,460 lf	1	
1	Exterior	Exterior Pebble Fascia	No	Miscellaneous	Non-Friable	20,000 sf		
1	Exterior	Exterior Overhang	No	Miscellaneous	Non-Friable	4,000 sf		
1	Gymnasium	Cinderblock	---	---	---	---		
1	Gymnasium	Concrete	---	---	---	---		
1	Gymnasium	Exterior Door Caulk, Interior Side, White	Yes	Miscellaneous	Non-Friable	80 lf	1	Present
1	Gymnasium	Gymnasium Wood Floor	No	Miscellaneous	Non-Friable	9,025 sf		
1	Gymnasium	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	80 lf	1	Present
1	Gymnasium	Tectum Deck	No	Miscellaneous	Non-Friable	9,025 sf		

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Gymnasium	Tectum Wall Panels	Assumed	Miscellaneous	Non-Friable	sf		Present
1	Gymnasium	Tectum Wall Panels	Assumed	Miscellaneous	Non-Friable	900 sf		Present
1	Gymnasium Hallway Boys Restroom	Ceramic Floor	---	---	---	---		
1	Gymnasium Hallway Boys Restroom	Cinderblock	---	---	---	---		
1	Gymnasium Hallway Boys Restroom	Concrete	---	---	---	---		
1	Gymnasium Hallway Boys Restroom	Hard Plaster Ceiling, Rough Texture, Brown Coat	No	Surfacing	Non-Friable	180 sf		
1	Gymnasium Hallway Boys Restroom	Hard Plaster Ceiling, Rough Texture, Finish Coat	No	Surfacing	Non-Friable	180 sf		
1	Gymnasium Hallway Boys Restroom	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Gymnasium Hallway Girls Restroom	Ceramic Floor	---	---	---	---		
1	Gymnasium Hallway Girls Restroom	Cinderblock	---	---	---	---		
1	Gymnasium Hallway Girls Restroom	Concrete	---	---	---	---		
1	Gymnasium Hallway Girls Restroom	Hard Plaster Ceiling, Rough Texture, Brown Coat	No	Surfacing	Non-Friable	180 sf		
1	Gymnasium Hallway Girls Restroom	Hard Plaster Ceiling, Rough Texture, Finish Coat	No	Surfacing	Non-Friable	180 sf		
1	Gymnasium Hallway Girls Restroom	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Gymnasium Storage A	Cinderblock	---	---	---	---		
1	Gymnasium Storage A	Concrete	---	---	---	---		
1	Gymnasium Storage A	Hard Plaster Ceiling Edge Caulk, Tan	Assumed	Miscellaneous	Non-Friable	60 lf	1	Present
1	Gymnasium Storage A	Hard Plaster Ceiling, Rough Texture, Brown Coat	No	Surfacing	Non-Friable	216 sf		
1	Gymnasium Storage A	Hard Plaster Ceiling, Rough Texture, Finish Coat	No	Surfacing	Non-Friable	216 sf		
1	Gymnasium Storage A	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Gymnasium Storage A	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	2 #		Present
1	Gymnasium Storage A	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Gymnasium/Library Hallway	Cinderblock	---	---	---	---		
1	Gymnasium/Library Hallway	Concrete	---	---	---	---		
1	Gymnasium/Library Hallway	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	120 lf	1	Present
1	Gymnasium/Library Hallway	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	2,450 sf		
1	Gymnasium/Library Hallway	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	500 lf		
1	Gymnasium/Library Hallway	Terrazzo Floor	---	---	---	---		
1	Gymnasium/Music Hallway	Cinderblock	---	---	---	---		
1	Gymnasium/Music Hallway	Concrete	---	---	---	---		
1	Gymnasium/Music Hallway	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	80 lf	1	Present
1	Gymnasium/Music Hallway	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	1,250 sf		
1	Gymnasium/Music Hallway	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	10 lf		Present
1	Gymnasium/Music Hallway	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	300 lf		
1	Gymnasium/Music Hallway	Terrazzo Floor	---	---	---	---		
1	Kitchen	Ceramic Floor	---	---	---	---		
1	Kitchen	Cinderblock	---	---	---	---		
1	Kitchen	Concrete	---	---	---	---		
1	Kitchen	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
1	Kitchen	Lay-in Ceiling Tile, 2' x 2', Drywall	No	Miscellaneous	Friable	1,224 sf		
1	Kitchen	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Kitchen	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Kitchen - Office	Ceramic Floor	---	---	---	---		
1	Kitchen - Office	Cinderblock	---	---	---	---		
1	Kitchen - Office	Concrete	---	---	---	---		

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Kitchen - Office	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	140 sf		
1	Kitchen - Office	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	140 sf		
1	Kitchen - Office	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Kitchen - Serving Area	Ceramic Floor	---	---	---	---		
1	Kitchen - Serving Area	Cinderblock	---	---	---	---		
1	Kitchen - Serving Area	Concrete	---	---	---	---		
1	Kitchen - Serving Area	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
1	Kitchen - Serving Area	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	280 sf		
1	Kitchen - Serving Area	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	3 #		Present
1	Kitchen - Serving Area	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	3 #		Present
1	Kitchen Hallway - Custodial Closet	Cinderblock	---	---	---	---		
1	Kitchen Hallway - Custodial Closet	Concrete	---	---	---	---		
1	Kitchen Hallway - Custodial Closet	Floor Tile Mastic, 12" x 12", Grey Mottled	No	Miscellaneous	Non-Friable	60 sf		
1	Kitchen Hallway - Custodial Closet	Floor Tile, 12" x 12", Grey Mottled	No	Miscellaneous	Non-Friable	60 sf		
1	Kitchen Hallway - Custodial Closet	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Kitchen Hallway - Custodial Closet	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	60 sf		
1	Kitchen Hallway - Custodial Closet	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	5 lf		Present
1	Kitchen Hallway - Custodial Closet	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	20 lf		
1	Kitchen Hallway - Custodial Closet	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Kitchen Hallway - Custodial Closet	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Kitchen Hallway - Dry Storage	Cinderblock	---	---	---	---		
1	Kitchen Hallway - Dry Storage	Concrete	---	---	---	---		
1	Kitchen Hallway - Dry Storage	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Kitchen Hallway - Dry Storage	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	300 sf		
1	Kitchen Hallway - Dry Storage	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	300 sf		Present
1	Kitchen Hallway - Dry Storage	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	300 sf		
1	Kitchen Hallway - Dry Storage	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	300 sf		
1	Kitchen Hallway - Dry Storage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Kitchen Hallway - Dry Storage	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Kitchen Hallway - Dry Storage	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Library	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	2,480 sf		
1	Library	Cinderblock	---	---	---	---		
1	Library	Concrete	---	---	---	---		
1	Library	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	200 lf	3	
1	Library	Covebase, 4", Black	No	Miscellaneous	Non-Friable	200 lf	3	
1	Library	Exterior Door Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Library	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
1	Library	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	30 lf	2	Present
1	Library	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Library	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
1	Library	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	2,480 sf		
1	Library - Audio Visual	Cinderblock	---	---	---	---		
1	Library - Audio Visual	Concrete	---	---	---	---		
1	Library - Audio Visual	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	68 lf	3	
1	Library - Audio Visual	Covebase, 4", Black	No	Miscellaneous	Non-Friable	68 lf	3	

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Library - Audio Visual	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	280 sf		
1	Library - Audio Visual	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	280 sf		Present
1	Library - Audio Visual	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Library - Audio Visual	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	25 lf	2	
1	Library - Audio Visual	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	280 sf		
1	Library - Office	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	280 sf		
1	Library - Office	Cinderblock	---	---	---	---		
1	Library - Office	Concrete	---	---	---	---		
1	Library - Office	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	68 lf	3	
1	Library - Office	Covebase, 4", Black	No	Miscellaneous	Non-Friable	68 lf	3	
1	Library - Office	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Library - Office	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	25 lf	2	
1	Library - Office	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	280 sf		
1	Library - Office	Sink Undercoating, Grey	No	Miscellaneous	Non-Friable	1 #		
1	Main Office	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	952 sf		
1	Main Office	Cinderblock	---	---	---	---		
1	Main Office	Concrete	---	---	---	---		
1	Main Office	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	60 lf	3	
1	Main Office	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	60 lf	3	
1	Main Office	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	1,000 sf		
1	Main Office	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	1,000 sf		
1	Main Office	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Main Office	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	60 lf	2	
1	Main Office	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	952 sf		
1	Main Office	Metal Deck	---	---	---	---		
1	Main Office - Conference Room	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	168 sf		
1	Main Office - Conference Room	Cinderblock	---	---	---	---		
1	Main Office - Conference Room	Concrete	---	---	---	---		
1	Main Office - Conference Room	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	52 lf	3	
1	Main Office - Conference Room	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	52 lf	3	
1	Main Office - Conference Room	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	312 sf		
1	Main Office - Conference Room	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	312 sf		
1	Main Office - Conference Room	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Main Office - Conference Room	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
1	Main Office - Conference Room	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	168 sf		
1	Main Office - Conference Room	Metal Deck	---	---	---	---		
1	Main Office - Copy Room	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	112 sf		
1	Main Office - Copy Room	Cinderblock	---	---	---	---		
1	Main Office - Copy Room	Concrete	---	---	---	---		
1	Main Office - Copy Room	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	44 lf	3	
1	Main Office - Copy Room	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	44 lf	3	
1	Main Office - Copy Room	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Main Office - Copy Room	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	112 sf		
1	Main Office - Copy Room	Metal Deck	---	---	---	---		
1	Main Office - Copy Room	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	2 #		Present

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Main Office - Copy Room	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	2 #		Present
1	Main Office - Restroom	Ceramic Floor	---	---	---	---		
1	Main Office - Restroom	Cinderblock	---	---	---	---		
1	Main Office - Restroom	Concrete	---	---	---	---		
1	Main Office - Restroom	Drywall Ceiling	No	Miscellaneous	Non-Friable	48 sf		
1	Main Office - Restroom	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	168 sf		
1	Main Office - Restroom	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	168 sf		
1	Main Office - Restroom	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Music Room Storage	Cinderblock	---	---	---	---		
1	Music Room Storage	Concrete	---	---	---	---		
1	Music Room Storage	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	50 lf	3	
1	Music Room Storage	Covebase, 4", Black	No	Miscellaneous	Non-Friable	50 lf	3	
1	Music Room Storage	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	192 sf		
1	Music Room Storage	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	192 sf		Present
1	Music Room Storage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Music Room Storage	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	192 sf		
1	Receiving	Cinderblock	---	---	---	---		
1	Receiving	Concrete	---	---	---	---		
1	Receiving	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Receiving	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	560 sf		
1	Receiving	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	2 #		Present
1	Receiving	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 102	Cinderblock	---	---	---	---		
1	Room 102	Concrete	---	---	---	---		
1	Room 102	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	60 lf	3	
1	Room 102	Covebase, 4", Black	No	Miscellaneous	Non-Friable	60 lf	3	
1	Room 102	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
1	Room 102	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	748 sf		
1	Room 102	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	748 sf		Present
1	Room 102	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 102	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	748 sf		
1	Room 102	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 102	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 103	Cinderblock	---	---	---	---		
1	Room 103	Concrete	---	---	---	---		
1	Room 103	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	72 lf	3	
1	Room 103	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	72 lf	3	
1	Room 103	Floor Tile Mastic, 12" x 12", Grey Mottled	No	Miscellaneous	Non-Friable	640 sf		
1	Room 103	Floor Tile, 12" x 12", Grey Mottled	No	Miscellaneous	Non-Friable	640 sf		
1	Room 103	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 103	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 103	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	640 sf		
1	Room 104	Cinderblock	---	---	---	---		
1	Room 104	Concrete	---	---	---	---		
1	Room 104	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	60 lf	3	

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Room 104	Covebase, 4", Black	No	Miscellaneous	Non-Friable	60 lf	3	
1	Room 104	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
1	Room 104	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	748 sf		
1	Room 104	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	748 sf		Present
1	Room 104	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 104	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	748 sf		
1	Room 107	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
1	Room 107	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	600 sf		
1	Room 107	Cinderblock	---	---	---	---		
1	Room 107	Concrete	---	---	---	---		
1	Room 107	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	100 lf	3	
1	Room 107	Covebase, 4", Black	No	Miscellaneous	Non-Friable	100 lf	3	
1	Room 107	Drywall	No	Miscellaneous	Non-Friable	300 sf		
1	Room 107	Drywall Mud	No	Miscellaneous	Non-Friable	300 sf		
1	Room 107	Drywall Tape	No	Miscellaneous	Non-Friable	300 sf		
1	Room 107	Duct Insulation, Fiberglass	---	---	---	---		
1	Room 107	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	600 sf		
1	Room 107	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	600 sf		Present
1	Room 107	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 107	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	600 sf		
1	Room 107	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	100 lf		
1	Room 107	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 107	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 107 - Storage	Cinderblock	---	---	---	---		
1	Room 107 - Storage	Concrete	---	---	---	---		
1	Room 107 - Storage	Floor Tile Mastic, 12" x 12", Cream with Tan	No	Miscellaneous	Non-Friable	120 sf		
1	Room 107 - Storage	Floor Tile, 12" x 12", Cream with Tan	No	Miscellaneous	Non-Friable	120 sf		
1	Room 107 - Storage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 107 - Storage	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	20 lf		
1	Room 107 - Storage	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 107 - Storage	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 107 - Storage	Tectum Deck	No	Miscellaneous	Non-Friable	120 sf		
1	Room 108	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	50 sf		
1	Room 108	Cinderblock	---	---	---	---		
1	Room 108	Concrete	---	---	---	---		
1	Room 108	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	156 lf	3	
1	Room 108	Covebase, 4", Black	No	Miscellaneous	Non-Friable	156 lf	3	
1	Room 108	Duct Insulation, Fiberglass	---	---	---	---		
1	Room 108	Floor Tile Mastic, 12" x 12", White with Grey	No	Miscellaneous	Non-Friable	1,408 sf		
1	Room 108	Floor Tile, 12" x 12", White with Grey	No	Miscellaneous	Non-Friable	1,408 sf		
1	Room 108	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 108	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	1,408 sf		
1	Room 108	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	20 lf		Present
1	Room 108	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	100 lf		
1	Room 108 - Office	Cinderblock	---	---	---	---		

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Room 108 - Office	Concrete	---	---	---	---		
1	Room 108 - Office	Drywall	No	Miscellaneous	Non-Friable	320 sf		
1	Room 108 - Office	Drywall Mud	No	Miscellaneous	Non-Friable	320 sf		
1	Room 108 - Office	Drywall Tape	No	Miscellaneous	Non-Friable	320 sf		
1	Room 108 - Office	Floor Tile Mastic, 12" x 12", Grey Mottled	No	Miscellaneous	Non-Friable	192 sf		
1	Room 108 - Office	Floor Tile, 12" x 12", Grey Mottled	No	Miscellaneous	Non-Friable	192 sf		
1	Room 108 - Office	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	192 sf		
1	Room 108 - Storage A	Cinderblock	---	---	---	---		
1	Room 108 - Storage A	Concrete	---	---	---	---		
1	Room 108 - Storage A	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 108 - Storage A	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	20 lf		
1	Room 108 - Storage A	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 108 - Storage A	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 108 - Storage B	Cinderblock	---	---	---	---		
1	Room 108 - Storage B	Concrete	---	---	---	---		
1	Room 108 - Storage B	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 108 - Storage B	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	20 lf		
1	Room 108 - Storage B	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 108 - Storage B	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 109	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
1	Room 109	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	952 sf		
1	Room 109	Cinderblock	---	---	---	---		
1	Room 109	Concrete	---	---	---	---		
1	Room 109	Covebase Adhesive, 4", Blue	No	Miscellaneous	Non-Friable	122 lf	3	
1	Room 109	Covebase, 4", Blue	No	Miscellaneous	Non-Friable	122 lf	3	
1	Room 109	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 109	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	2	Present
1	Room 109	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	952 sf		
1	Room 109	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	952 sf		Present
1	Room 109	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 109	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 109	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	952 sf		
1	Room 109	Sink Undercoating, Black	Yes	Miscellaneous	Non-Friable	2 #		Present
1	Room 109	Straight Pipe Insulation, New Fiberglass	---	---	---	---		
1	Room 110	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
1	Room 110	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	952 sf		
1	Room 110	Cinderblock	---	---	---	---		
1	Room 110	Concrete	---	---	---	---		
1	Room 110	Covebase Adhesive, 4", Blue	No	Miscellaneous	Non-Friable	122 lf	3	
1	Room 110	Covebase, 4", Blue	No	Miscellaneous	Non-Friable	122 lf	3	
1	Room 110	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 110	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	2	Present
1	Room 110	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	952 sf		
1	Room 110	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	952 sf		Present
1	Room 110	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Room 110	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 110	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	952 sf		
1	Room 110	Sink Undercoating, Black	Yes	Miscellaneous	Non-Friable	2 #		Present
1	Room 110	Straight Pipe Insulation, New Fiberglass	---	---	---	---		
1	Room 111	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
1	Room 111	Cinderblock	---	---	---	---		
1	Room 111	Concrete	---	---	---	---		
1	Room 111	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 111	Covebase, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 111	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 111	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
1	Room 111	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	784 sf		
1	Room 111	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	784 sf		Present
1	Room 111	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 111	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 111	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
1	Room 112	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
1	Room 112	Cinderblock	---	---	---	---		
1	Room 112	Concrete	---	---	---	---		
1	Room 112	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 112	Covebase, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 112	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 112	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
1	Room 112	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	784 sf		
1	Room 112	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	784 sf		Present
1	Room 112	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 112	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 112	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
1	Room 113	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
1	Room 113	Cinderblock	---	---	---	---		
1	Room 113	Concrete	---	---	---	---		
1	Room 113	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 113	Covebase, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 113	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 113	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
1	Room 113	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	784 sf		
1	Room 113	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	784 sf		Present
1	Room 113	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 113	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 113	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
1	Room 114	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
1	Room 114	Cinderblock	---	---	---	---		
1	Room 114	Concrete	---	---	---	---		
1	Room 114	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 114	Covebase, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Room 114	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 114	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
1	Room 114	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	784 sf		
1	Room 114	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	784 sf		Present
1	Room 114	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 114	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 114	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
1	Room 115	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
1	Room 115	Cinderblock	---	---	---	---		
1	Room 115	Concrete	---	---	---	---		
1	Room 115	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 115	Covebase, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 115	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 115	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
1	Room 115	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	784 sf		
1	Room 115	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	784 sf		Present
1	Room 115	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 115	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 115	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
1	Room 116	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
1	Room 116	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	784 sf		
1	Room 116	Cinderblock	---	---	---	---		
1	Room 116	Concrete	---	---	---	---		
1	Room 116	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 116	Covebase, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 116	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 116	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
1	Room 116	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	784 sf		
1	Room 116	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	784 sf		Present
1	Room 116	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 116	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 116	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
1	Room 116A	Cinderblock	---	---	---	---		
1	Room 116A	Concrete	---	---	---	---		
1	Room 116A	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	52 lf	3	
1	Room 116A	Covebase, 4", Black	No	Miscellaneous	Non-Friable	52 lf	3	
1	Room 116A	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	144 sf		
1	Room 116A	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	144 sf		Present
1	Room 116A	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 116A	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	144 sf		
1	Room 116A	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 117	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
1	Room 117	Cinderblock	---	---	---	---		
1	Room 117	Concrete	---	---	---	---		
1	Room 117	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	100 lf	3	

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Room 117	Covebase, 4", Black	No	Miscellaneous	Non-Friable	100 lf	3	
1	Room 117	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 117	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	1,224 sf		
1	Room 117	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	1,224 sf		Present
1	Room 117	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	204 sf		
1	Room 117	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	204 sf		
1	Room 117	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 117	Lay-in Ceiling Tile, 2' x 2', Drywall	No	Miscellaneous	Friable	1,224 sf		
1	Room 117A	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	384 sf		
1	Room 117A	Cinderblock	---	---	---	---		
1	Room 117A	Concrete	---	---	---	---		
1	Room 117A	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	80 lf	3	
1	Room 117A	Covebase, 4", Black	No	Miscellaneous	Non-Friable	80 lf	3	
1	Room 117A	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 117A	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	384 sf		
1	Room 118	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
1	Room 118	Cinderblock	---	---	---	---		
1	Room 118	Concrete	---	---	---	---		
1	Room 118	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	100 lf	3	
1	Room 118	Covebase, 4", Black	No	Miscellaneous	Non-Friable	100 lf	3	
1	Room 118	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	1,224 sf		
1	Room 118	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	1,224 sf		Present
1	Room 118	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	204 sf		
1	Room 118	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	204 sf		
1	Room 118	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 118	Lay-in Ceiling Tile, 2' x 2', Drywall	No	Miscellaneous	Friable	1,224 sf		
1	Room 118 - Corridor	Cinderblock	---	---	---	---		
1	Room 118 - Corridor	Concrete	---	---	---	---		
1	Room 118 - Corridor	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	30 lf	3	
1	Room 118 - Corridor	Covebase, 4", Black	No	Miscellaneous	Non-Friable	30 lf	3	
1	Room 118 - Corridor	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	180 sf		
1	Room 118 - Corridor	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	180 sf		Present
1	Room 118 - Corridor	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	180 sf		
1	Room 118 - Storage A	Cinderblock	---	---	---	---		
1	Room 118 - Storage A	Concrete	---	---	---	---		
1	Room 118 - Storage A	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	10 lf	3	
1	Room 118 - Storage A	Covebase, 4", Black	No	Miscellaneous	Non-Friable	10 lf	3	
1	Room 118 - Storage A	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118 - Storage A	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	48 sf		
1	Room 118 - Storage A	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	48 sf		Present
1	Room 118 - Storage A	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118 - Storage A	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	48 sf		
1	Room 118 - Storage B	Cinderblock	---	---	---	---		
1	Room 118 - Storage B	Concrete	---	---	---	---		

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Room 118 - Storage B	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	10 lf	3	
1	Room 118 - Storage B	Covebase, 4", Black	No	Miscellaneous	Non-Friable	10 lf	3	
1	Room 118 - Storage B	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118 - Storage B	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	48 sf		
1	Room 118 - Storage B	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	48 sf		Present
1	Room 118 - Storage B	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118 - Storage B	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	48 sf		
1	Room 118 - Storage C	Cinderblock	---	---	---	---		
1	Room 118 - Storage C	Concrete	---	---	---	---		
1	Room 118 - Storage C	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	10 lf	3	
1	Room 118 - Storage C	Covebase, 4", Black	No	Miscellaneous	Non-Friable	10 lf	3	
1	Room 118 - Storage C	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118 - Storage C	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	48 sf		
1	Room 118 - Storage C	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	48 sf		Present
1	Room 118 - Storage C	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118 - Storage C	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	48 sf		
1	Room 118 - Storage D	Cinderblock	---	---	---	---		
1	Room 118 - Storage D	Concrete	---	---	---	---		
1	Room 118 - Storage D	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	10 lf	3	
1	Room 118 - Storage D	Covebase, 4", Black	No	Miscellaneous	Non-Friable	10 lf	3	
1	Room 118 - Storage D	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118 - Storage D	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	48 sf		
1	Room 118 - Storage D	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	48 sf		Present
1	Room 118 - Storage D	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118 - Storage D	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	48 sf		
1	Room 98	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
1	Room 98	Cinderblock	---	---	---	---		
1	Room 98	Concrete	---	---	---	---		
1	Room 98	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	96 lf	3	
1	Room 98	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	96 lf	3	
1	Room 98	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	560 sf		
1	Room 98	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	560 sf		
1	Room 98	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 98	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
1	Room 98	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	560 sf		
1	Room 98	Sink Undercoating, Grey	No	Miscellaneous	Non-Friable	1 #		
1	Stage	Cinderblock	---	---	---	---		
1	Stage	Concrete	---	---	---	---		
1	Stage	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Stage	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	40 sf		
1	Stage	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	40 sf		Present
1	Stage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Stage	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	5 lf		Present
1	Stage	Stage Wood Floor	No	Miscellaneous	Non-Friable	896 sf		
1	Stage	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	100 lf		

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Stage	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Stage	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Stage	Tectum Deck	No	Miscellaneous	Non-Friable	896 sf		
1	Stage Hallway Storage	Cinderblock	---	---	---	---		
1	Stage Hallway Storage	Concrete	---	---	---	---		
1	Stage Hallway Storage	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	264 sf		
1	Stage Hallway Storage	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	264 sf		
1	Stage Hallway Storage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Stage Hallway Storage	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	20 lf		
1	Stage Hallway Storage	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Stage Hallway Storage	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Stage Storage	Cinderblock	---	---	---	---		
1	Stage Storage	Concrete	---	---	---	---		
1	Stage Storage	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	200 sf		
1	Stage Storage	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	200 sf		
1	Stage Storage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Stage Storage	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	2 lf		Present
1	Stage Storage	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	60 lf		
1	Stage Storage	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Stage Storage	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Ticket Booth	Cinderblock	---	---	---	---		
1	Ticket Booth	Concrete	---	---	---	---		
1	Ticket Booth	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	5 lf	3	
1	Ticket Booth	Covebase, 4", Black	No	Miscellaneous	Non-Friable	5 lf	3	
1	Ticket Booth	Floor Tile Mastic, 9" x 9", Tan with Grey	No	Miscellaneous	Non-Friable	50 sf		
1	Ticket Booth	Floor Tile, 9" x 9", Tan with Grey	Yes	Miscellaneous	Non-Friable	50 sf		Present
1	Ticket Booth	Hard Plaster Ceiling, Rough Texture, Brown Coat	No	Surfacing	Non-Friable	50 sf		
1	Ticket Booth	Hard Plaster Ceiling, Rough Texture, Finish Coat	No	Surfacing	Non-Friable	50 sf		
1	Ticket Booth	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Ticket Booth	Interior Window Caulk, Tan	Yes	Miscellaneous	Non-Friable	10 lf	1	Present
1	Varsity	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	864 sf		
1	Varsity	Cinderblock	---	---	---	---		
1	Varsity	Concrete	---	---	---	---		
1	Varsity	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	130 lf	3	
1	Varsity	Covebase, 4", Black	No	Miscellaneous	Non-Friable	130 lf	3	
1	Varsity	Drywall	No	Miscellaneous	Non-Friable	1,300 sf		
1	Varsity	Drywall Mud	No	Miscellaneous	Non-Friable	1,300 sf		
1	Varsity	Drywall Tape	No	Miscellaneous	Non-Friable	1,300 sf		
1	Varsity	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Varsity	Lay-in Ceiling Tile, 2' x 2', Dots and Gouges	No	Miscellaneous	Friable	864 sf		
1	Varsity	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	10 lf		Present
1	Varsity	Sink Undercoating, Grey	No	Miscellaneous	Non-Friable	1 #		
1	Varsity	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	80 lf		
2	Dark Room	Cinderblock	---	---	---	---		
2	Dark Room	Concrete	---	---	---	---		

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
2	Dark Room	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	44 lf	3	
2	Dark Room	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	44 lf	3	
2	Dark Room	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	120 sf		
2	Dark Room	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	120 sf		
2	Dark Room	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Dark Room	Lab Sink	No	Miscellaneous	Non-Friable	1 #		
2	Dark Room	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	120 sf		
2	Dark Room	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	Dark Room	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	Dark Room	Tectum Deck	No	Miscellaneous	Non-Friable	120 sf		
2	East Stairwell	Cinderblock	---	---	---	---		
2	East Stairwell	Concrete	---	---	---	---		
2	East Stairwell	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	30 lf	3	
2	East Stairwell	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	30 lf	3	
2	East Stairwell	Exterior Door Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	East Stairwell	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	East Stairwell	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	East Stairwell	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	East Stairwell	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	East Stairwell	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	120 lf	1	Present
2	East Stairwell	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	80 lf	2	
2	East Stairwell	Interior Door Window Glaze, White	No	Miscellaneous	Non-Friable	40 lf	2	
2	East Stairwell	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	448 sf		
2	East Stairwell	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	4 #		Present
2	East Stairwell	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	4 #		Present
2	East Stairwell	Terrazzo Floor	---	---	---	---		
2	Office near Second Floor Boys Restroom	Cinderblock	---	---	---	---		
2	Office near Second Floor Boys Restroom	Concrete	---	---	---	---		
2	Office near Second Floor Boys Restroom	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	56 lf	3	
2	Office near Second Floor Boys Restroom	Covebase, 4", Black	No	Miscellaneous	Non-Friable	56 lf	3	
2	Office near Second Floor Boys Restroom	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	180 sf		
2	Office near Second Floor Boys Restroom	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	180 sf		Present
2	Office near Second Floor Boys Restroom	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Office near Second Floor Boys Restroom	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Office near Second Floor Boys Restroom	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	180 sf		
2	Room 200	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
2	Room 200	Cinderblock	---	---	---	---		
2	Room 200	Concrete	---	---	---	---		
2	Room 200	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 200	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 200	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 200	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	Room 200	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 200	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 200	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
2	Room 200	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
2	Room 200	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 200	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 201	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
2	Room 201	Cinderblock	---	---	---	---		
2	Room 201	Concrete	---	---	---	---		
2	Room 201	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 201	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 201	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 201	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	Room 201	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 201	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 201	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 201	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
2	Room 201	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 201	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 202	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
2	Room 202	Cinderblock	---	---	---	---		
2	Room 202	Concrete	---	---	---	---		
2	Room 202	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 202	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 202	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 202	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	Room 202	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 202	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 202	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 202	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
2	Room 202	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 202	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 203	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
2	Room 203	Cinderblock	---	---	---	---		
2	Room 203	Concrete	---	---	---	---		
2	Room 203	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 203	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 203	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
2	Room 203	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	30 lf	2	Present
2	Room 203	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 203	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 203	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 203	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
2	Room 203	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 203	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 204	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
2	Room 204	Cinderblock	---	---	---	---		
2	Room 204	Concrete	---	---	---	---		

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
2	Room 204	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 204	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 204	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	80 lf	1	Present
2	Room 204	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	2	Present
2	Room 204	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 204	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 204	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 204	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
2	Room 204	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 204	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 205	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
2	Room 205	Cinderblock	---	---	---	---		
2	Room 205	Concrete	---	---	---	---		
2	Room 205	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 205	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 205	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
2	Room 205	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	30 lf	2	Present
2	Room 205	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 205	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 205	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 205	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
2	Room 205	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 205	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 206	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
2	Room 206	Cinderblock	---	---	---	---		
2	Room 206	Concrete	---	---	---	---		
2	Room 206	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	120 lf	3	
2	Room 206	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	120 lf	3	
2	Room 206	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	Room 206	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	Room 206	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Room 206	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 206	Interior Window Caulk, Tan	Yes	Miscellaneous	Non-Friable	80 lf	1	Present
2	Room 206	Interior Window Glaze, White	No	Miscellaneous	Non-Friable	40 lf	2	
2	Room 206	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	896 sf		
2	Room 206	Tectum Deck	No	Miscellaneous	Non-Friable	896 sf		
2	Room 206/207 Storage	Cinderblock	---	---	---	---		
2	Room 206/207 Storage	Concrete	---	---	---	---		
2	Room 206/207 Storage	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	48 lf	3	
2	Room 206/207 Storage	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	48 lf	3	
2	Room 206/207 Storage	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	140 sf		
2	Room 206/207 Storage	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	140 sf		
2	Room 206/207 Storage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 206/207 Storage	Lab Sink	No	Miscellaneous	Non-Friable	1 #		
2	Room 206/207 Storage	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	140 sf		

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
2	Room 206/207 Storage	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	2 #		Present
2	Room 206/207 Storage	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	2 #		Present
2	Room 207	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
2	Room 207	Cinderblock	---	---	---	---		
2	Room 207	Concrete	---	---	---	---		
2	Room 207	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	120 lf	3	
2	Room 207	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	120 lf	3	
2	Room 207	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	Room 207	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	Room 207	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 207	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 207	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	896 sf		
2	Room 207	Tectum Deck	No	Miscellaneous	Non-Friable	896 sf		
2	Room 208	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
2	Room 208	Cinderblock	---	---	---	---		
2	Room 208	Concrete	---	---	---	---		
2	Room 208	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 208	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 208	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 208	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 208	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Room 208	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 208	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 208	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 209	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	50 sf		
2	Room 209	Cinderblock	---	---	---	---		
2	Room 209	Concrete	---	---	---	---		
2	Room 209	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 209	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 209	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 209	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 209	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	300 sf		
2	Room 209	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	300 sf		
2	Room 209	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 209	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 209	Interior Window Caulk, Tan	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
2	Room 209	Interior Window Glaze, White	No	Miscellaneous	Non-Friable	30 lf	2	
2	Room 209	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 209	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 209A	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	50 sf		
2	Room 209A	Cinderblock	---	---	---	---		
2	Room 209A	Concrete	---	---	---	---		
2	Room 209A	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 209A	Covebase, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 209A	Floor Tile Mastic, 12" x 12", Cream with Tan	No	Miscellaneous	Non-Friable	784 sf		

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
2	Room 209A	Floor Tile, 12" x 12", Cream with Tan	No	Miscellaneous	Non-Friable	784 sf		
2	Room 209A	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	300 sf		
2	Room 209A	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	300 sf		
2	Room 209A	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 209A	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 209A	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 209A	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 210	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
2	Room 210	Cinderblock	---	---	---	---		
2	Room 210	Concrete	---	---	---	---		
2	Room 210	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 210	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 210	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 210	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	Room 210	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 210	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 210	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Room 210	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 210	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 210	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 211	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
2	Room 211	Cinderblock	---	---	---	---		
2	Room 211	Concrete	---	---	---	---		
2	Room 211	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 211	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 211	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 211	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	Room 211	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 211	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 211	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Room 211	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 211	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 211	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 212	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
2	Room 212	Cinderblock	---	---	---	---		
2	Room 212	Concrete	---	---	---	---		
2	Room 212	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	120 lf	3	
2	Room 212	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	120 lf	3	
2	Room 212	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 212	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	Room 212	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	Room 212	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	Room 212	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Room 212	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 212	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	896 sf		

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
2	Room 212	Tectum Deck	No	Miscellaneous	Non-Friable	896 sf		
2	Room 214	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	250 sf		
2	Room 214	Cinderblock	---	---	---	---		
2	Room 214	Concrete	---	---	---	---		
2	Room 214	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	124 lf	3	
2	Room 214	Covebase, 4", Black	No	Miscellaneous	Non-Friable	124 lf	3	
2	Room 214	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
2	Room 214	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	30 lf	2	Present
2	Room 214	Floor Tile Mastic, 12" x 12", Blue Mottled	No	Miscellaneous	Non-Friable	952 sf		
2	Room 214	Floor Tile, 12" x 12", Blue Mottled	No	Miscellaneous	Non-Friable	952 sf		
2	Room 214	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Room 214	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 214	Lab Sink	No	Miscellaneous	Non-Friable	8 #		
2	Room 214	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	952 sf		
2	Room 214	Tectum Deck	No	Miscellaneous	Non-Friable	952 sf		
2	Room 215	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	250 sf		
2	Room 215	Cinderblock	---	---	---	---		
2	Room 215	Concrete	---	---	---	---		
2	Room 215	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	124 lf	3	
2	Room 215	Covebase, 4", Black	No	Miscellaneous	Non-Friable	124 lf	3	
2	Room 215	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
2	Room 215	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	30 lf	2	Present
2	Room 215	Floor Tile Mastic, 12" x 12", Blue Mottled	No	Miscellaneous	Non-Friable	952 sf		
2	Room 215	Floor Tile, 12" x 12", Blue Mottled	No	Miscellaneous	Non-Friable	952 sf		
2	Room 215	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Room 215	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 215	Lab Sink	No	Miscellaneous	Non-Friable	8 #		
2	Room 215	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	952 sf		
2	Room 215	Tectum Deck	No	Miscellaneous	Non-Friable	952 sf		
2	Room 215/214 Storage	Cinderblock	---	---	---	---		
2	Room 215/214 Storage	Concrete	---	---	---	---		
2	Room 215/214 Storage	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	80 lf	3	
2	Room 215/214 Storage	Covebase, 4", Black	No	Miscellaneous	Non-Friable	80 lf	3	
2	Room 215/214 Storage	Floor Tile Mastic, 12" x 12", Blue Mottled	No	Miscellaneous	Non-Friable	312 sf		
2	Room 215/214 Storage	Floor Tile, 12" x 12", Blue Mottled	No	Miscellaneous	Non-Friable	312 sf		
2	Room 215/214 Storage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 215/214 Storage	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
2	Room 215/214 Storage	Lab Sink	No	Miscellaneous	Non-Friable	1 #		
2	Room 215/214 Storage	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	312 sf		
2	Room 215/214 Storage	Tectum Deck	No	Miscellaneous	Non-Friable	312 sf		
2	Second Floor Boys Restroom	Ceramic Floor	---	---	---	---		
2	Second Floor Boys Restroom	Cinderblock	---	---	---	---		
2	Second Floor Boys Restroom	Concrete	---	---	---	---		
2	Second Floor Boys Restroom	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	168 sf		
2	Second Floor Boys Restroom	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	168 sf		

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
2	Second Floor Boys Restroom	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Second Floor Custodial Closet	Cinderblock	---	---	---	---		
2	Second Floor Custodial Closet	Concrete	---	---	---	---		
2	Second Floor Custodial Closet	Duct Sealant, Grey	No	Miscellaneous	Non-Friable	5 lf		
2	Second Floor Custodial Closet	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	112 sf		
2	Second Floor Custodial Closet	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	112 sf		
2	Second Floor Custodial Closet	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Second Floor Custodial Closet	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	15 lf		
2	Second Floor Custodial Closet	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	Second Floor Custodial Closet	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	Second Floor East Hallway	Cinderblock	---	---	---	---		
2	Second Floor East Hallway	Concrete	---	---	---	---		
2	Second Floor East Hallway	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	120 lf	1	Present
2	Second Floor East Hallway	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	2	Present
2	Second Floor East Hallway	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	500 sf		
2	Second Floor East Hallway	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	500 sf		
2	Second Floor East Hallway	Interior Window Caulk, Tan	Yes	Miscellaneous	Non-Friable	80 lf	1	Present
2	Second Floor East Hallway	Interior Window Glaze, White	No	Miscellaneous	Non-Friable	40 lf	2	
2	Second Floor East Hallway	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	500 sf		
2	Second Floor East Hallway	Tectum Deck	No	Miscellaneous	Non-Friable	500 sf		
2	Second Floor Faculty Copy Room	Cinderblock	---	---	---	---		
2	Second Floor Faculty Copy Room	Concrete	---	---	---	---		
2	Second Floor Faculty Copy Room	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	96 sf		
2	Second Floor Faculty Copy Room	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	96 sf		
2	Second Floor Faculty Copy Room	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Second Floor Faculty Copy Room	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	96 sf		
2	Second Floor Faculty Copy Room	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	Second Floor Faculty Copy Room	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	Second Floor Faculty Restroom	Ceramic Floor	---	---	---	---		
2	Second Floor Faculty Restroom	Cinderblock	---	---	---	---		
2	Second Floor Faculty Restroom	Concrete	---	---	---	---		
2	Second Floor Faculty Restroom	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	60 sf		
2	Second Floor Faculty Restroom	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	60 sf		
2	Second Floor Faculty Restroom	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Second Floor Girls Restroom	Ceramic Floor	---	---	---	---		
2	Second Floor Girls Restroom	Cinderblock	---	---	---	---		
2	Second Floor Girls Restroom	Concrete	---	---	---	---		
2	Second Floor Girls Restroom	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	224 sf		
2	Second Floor Girls Restroom	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	224 sf		
2	Second Floor Girls Restroom	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Second Floor Mechanical Room	Cinderblock	---	---	---	---		
2	Second Floor Mechanical Room	Concrete	---	---	---	---		
2	Second Floor Mechanical Room	Hard Plaster Wall, Rough Texture, Brown Coat	No	Surfacing	Non-Friable	560 sf		
2	Second Floor Mechanical Room	Hard Plaster Wall, Rough Texture, Finish Coat	No	Surfacing	Non-Friable	560 sf		
2	Second Floor Mechanical Room	HVAC Vibration Dampener, Black	No	Miscellaneous	Non-Friable	20 sf		

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
2	Second Floor Mechanical Room	Interior Door Caulk, White	No	Miscellaneous	Non-Friable	20 lf	1	
2	Second Floor Mechanical Room	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	Second Floor Mechanical Room	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	Second Floor Mechanical Room	Tectum Deck	No	Miscellaneous	Non-Friable	952 sf		
2	Second Floor North Hallway	Cinderblock	---	---	---	---		
2	Second Floor North Hallway	Concrete	---	---	---	---		
2	Second Floor North Hallway	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	2,080 sf		
2	Second Floor North Hallway	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	2,080 sf		
2	Second Floor North Hallway	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	1,500 sf		
2	Second Floor North Hallway	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	1,500 sf		
2	Second Floor North Hallway	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	2,080 sf		
2	Second Floor North Hallway	Tectum Deck	No	Miscellaneous	Non-Friable	2,080 sf		
2	Second Floor South Hallway	Cinderblock	---	---	---	---		
2	Second Floor South Hallway	Concrete	---	---	---	---		
2	Second Floor South Hallway	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	2,080 sf		
2	Second Floor South Hallway	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	2,080 sf		
2	Second Floor South Hallway	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	1,500 sf		
2	Second Floor South Hallway	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	1,500 sf		
2	Second Floor South Hallway	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	2,080 sf		
2	Second Floor South Hallway	Tectum Deck	No	Miscellaneous	Non-Friable	2,080 sf		
2	Second Floor West Hallway	Cinderblock	---	---	---	---		
2	Second Floor West Hallway	Concrete	---	---	---	---		
2	Second Floor West Hallway	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	120 lf	1	Present
2	Second Floor West Hallway	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	2	Present
2	Second Floor West Hallway	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	500 sf		
2	Second Floor West Hallway	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	500 sf		
2	Second Floor West Hallway	Interior Window Caulk, Tan	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
2	Second Floor West Hallway	Interior Window Glaze, White	No	Miscellaneous	Non-Friable	30 lf	2	
2	Second Floor West Hallway	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	500 sf		
2	Second Floor West Hallway	Tectum Deck	No	Miscellaneous	Non-Friable	500 sf		
2	West Stairwell	Cinderblock	---	---	---	---		
2	West Stairwell	Concrete	---	---	---	---		
2	West Stairwell	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	30 lf	3	
2	West Stairwell	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	30 lf	3	
2	West Stairwell	Exterior Door Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	West Stairwell	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	West Stairwell	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	West Stairwell	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	West Stairwell	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	West Stairwell	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	120 lf	1	Present
2	West Stairwell	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	80 lf	2	

TABLE OF HOMOGENEOUS AREAS BY FUNCTIONAL SPACE

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
2	West Stairwell	Interior Door Window Glaze, White	No	Miscellaneous	Non-Friable	40 lf	2	
2	West Stairwell	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	448 sf		
2	West Stairwell	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	4 #		Present
2	West Stairwell	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	4 #		Present
2	West Stairwell	Terrazzo Floor	---	---	---	---		

Notes:

- 1 Door, window and other caulk materials quantified in linear footage. To obtain square footage the liner footage should be multiplied by the width of the caulk (approximately 0.04 feet).
- 2 Window glazing materials quantified in linear footage. To obtain square footage the liner footage should be multiplied by the width of the caulk (approximately 0.08 feet).
- 3 Covebase and covebase adhesive quantified in linear footage. To obtain square footage the liner footage should be multiplied by the height of the covebase (approximately 0.33 feet).

Status:

Only provided for asbestos-containing materials. This can be changed to "Abated" once the material has been removed.

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Room 107	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
1	Room 108	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	50 sf		
1	Room 109	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
1	Room 110	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
1	Room 111	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
1	Room 112	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
1	Room 113	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
1	Room 114	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
1	Room 115	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
1	Room 116	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
1	Room 117	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
1	Room 118	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
1	Room 98	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
2	Room 200	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
2	Room 201	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
2	Room 202	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
2	Room 203	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
2	Room 204	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
2	Room 205	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
2	Room 206	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
2	Room 207	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	150 sf		
2	Room 208	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
2	Room 209	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	50 sf		
2	Room 209A	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	50 sf		
2	Room 210	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
2	Room 211	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
2	Room 212	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	100 sf		
2	Room 214	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	250 sf		
2	Room 215	Adhesive (Gluepods) Chalkboard/Whiteboard	No	Miscellaneous	Non-Friable	250 sf		
1	Counseling Center	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	360 sf		
1	Counseling Center - Conference Room	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	140 sf		
1	Counseling Center - Copy Room	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	120 sf		
1	Counseling Center - Office A	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	140 sf		
1	Counseling Center - Office B	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	140 sf		
1	Counseling Center - Office C	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	140 sf		
1	Counseling Center - Office D	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	80 sf		
1	Counseling Center - Office E	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	80 sf		
1	Library	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	2,480 sf		
1	Library - Office	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	280 sf		
1	Main Office	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	952 sf		
1	Main Office - Conference Room	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	168 sf		
1	Main Office - Copy Room	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	112 sf		
1	Room 107	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	600 sf		
1	Room 109	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	952 sf		
1	Room 110	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	952 sf		

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Room 116	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	784 sf		
1	Room 117A	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	384 sf		
1	Varsity	Carpet Adhesive, Yellow	No	Miscellaneous	Non-Friable	864 sf		
1	Boys Locker Room	Ceramic Floor	---	---	---	---		
1	Boys Locker Room - Office	Ceramic Floor	---	---	---	---		
1	Counseling Center - Restroom	Ceramic Floor	---	---	---	---		
1	Gymnasium Hallway Boys Restroom	Ceramic Floor	---	---	---	---		
1	Gymnasium Hallway Girls Restroom	Ceramic Floor	---	---	---	---		
1	Kitchen	Ceramic Floor	---	---	---	---		
1	Kitchen - Office	Ceramic Floor	---	---	---	---		
1	Kitchen - Serving Area	Ceramic Floor	---	---	---	---		
1	Main Office - Restroom	Ceramic Floor	---	---	---	---		
2	Second Floor Boys Restroom	Ceramic Floor	---	---	---	---		
2	Second Floor Faculty Restroom	Ceramic Floor	---	---	---	---		
2	Second Floor Girls Restroom	Ceramic Floor	---	---	---	---		
1	Art Hallway	Cinderblock	---	---	---	---		
1	Boiler Room	Cinderblock	---	---	---	---		
1	Boiler Room - Laundry	Cinderblock	---	---	---	---		
1	Boiler Room - Storage	Cinderblock	---	---	---	---		
1	Boys Locker Room	Cinderblock	---	---	---	---		
1	Boys Locker Room - Custodial Closet	Cinderblock	---	---	---	---		
1	Boys Locker Room - Mezzanine	Cinderblock	---	---	---	---		
1	Boys Locker Room - Office	Cinderblock	---	---	---	---		
1	Cafeteria	Cinderblock	---	---	---	---		
1	Counseling Center	Cinderblock	---	---	---	---		
1	Counseling Center - Conference Room	Cinderblock	---	---	---	---		
1	Counseling Center - Copy Room	Cinderblock	---	---	---	---		
1	Counseling Center - Office A	Cinderblock	---	---	---	---		
1	Counseling Center - Office B	Cinderblock	---	---	---	---		
1	Counseling Center - Office C	Cinderblock	---	---	---	---		
1	Counseling Center - Office D	Cinderblock	---	---	---	---		
1	Counseling Center - Office E	Cinderblock	---	---	---	---		
1	Counseling Center - Restroom	Cinderblock	---	---	---	---		
1	Gymnasium	Cinderblock	---	---	---	---		
1	Gymnasium Hallway Boys Restroom	Cinderblock	---	---	---	---		
1	Gymnasium Hallway Girls Restroom	Cinderblock	---	---	---	---		
1	Gymnasium Storage A	Cinderblock	---	---	---	---		
1	Gymnasium/Library Hallway	Cinderblock	---	---	---	---		
1	Gymnasium/Music Hallway	Cinderblock	---	---	---	---		
1	Kitchen	Cinderblock	---	---	---	---		
1	Kitchen - Office	Cinderblock	---	---	---	---		
1	Kitchen - Serving Area	Cinderblock	---	---	---	---		
1	Kitchen Hallway - Custodial Closet	Cinderblock	---	---	---	---		
1	Kitchen Hallway - Dry Storage	Cinderblock	---	---	---	---		
1	Library	Cinderblock	---	---	---	---		

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Library - Audio Visual	Cinderblock	---	---	---	---		
1	Library - Office	Cinderblock	---	---	---	---		
1	Main Office	Cinderblock	---	---	---	---		
1	Main Office - Conference Room	Cinderblock	---	---	---	---		
1	Main Office - Copy Room	Cinderblock	---	---	---	---		
1	Main Office - Restroom	Cinderblock	---	---	---	---		
1	Music Room Storage	Cinderblock	---	---	---	---		
1	Receiving	Cinderblock	---	---	---	---		
1	Room 102	Cinderblock	---	---	---	---		
1	Room 103	Cinderblock	---	---	---	---		
1	Room 104	Cinderblock	---	---	---	---		
1	Room 107	Cinderblock	---	---	---	---		
1	Room 107 - Storage	Cinderblock	---	---	---	---		
1	Room 108	Cinderblock	---	---	---	---		
1	Room 108 - Office	Cinderblock	---	---	---	---		
1	Room 108 - Storage A	Cinderblock	---	---	---	---		
1	Room 108 - Storage B	Cinderblock	---	---	---	---		
1	Room 109	Cinderblock	---	---	---	---		
1	Room 110	Cinderblock	---	---	---	---		
1	Room 111	Cinderblock	---	---	---	---		
1	Room 112	Cinderblock	---	---	---	---		
1	Room 113	Cinderblock	---	---	---	---		
1	Room 114	Cinderblock	---	---	---	---		
1	Room 115	Cinderblock	---	---	---	---		
1	Room 116	Cinderblock	---	---	---	---		
1	Room 116A	Cinderblock	---	---	---	---		
1	Room 117	Cinderblock	---	---	---	---		
1	Room 117A	Cinderblock	---	---	---	---		
1	Room 118	Cinderblock	---	---	---	---		
1	Room 118 - Corridor	Cinderblock	---	---	---	---		
1	Room 118 - Storage A	Cinderblock	---	---	---	---		
1	Room 118 - Storage B	Cinderblock	---	---	---	---		
1	Room 118 - Storage C	Cinderblock	---	---	---	---		
1	Room 118 - Storage D	Cinderblock	---	---	---	---		
1	Room 98	Cinderblock	---	---	---	---		
1	Stage	Cinderblock	---	---	---	---		
1	Stage Hallway Storage	Cinderblock	---	---	---	---		
1	Stage Storage	Cinderblock	---	---	---	---		
1	Ticket Booth	Cinderblock	---	---	---	---		
1	Varsity	Cinderblock	---	---	---	---		
2	Dark Room	Cinderblock	---	---	---	---		
2	East Stairwell	Cinderblock	---	---	---	---		
2	Office near Second Floor Boys Restroom	Cinderblock	---	---	---	---		
2	Room 200	Cinderblock	---	---	---	---		
2	Room 201	Cinderblock	---	---	---	---		

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
2	Room 202	Cinderblock	---	---	---	---		
2	Room 203	Cinderblock	---	---	---	---		
2	Room 204	Cinderblock	---	---	---	---		
2	Room 205	Cinderblock	---	---	---	---		
2	Room 206	Cinderblock	---	---	---	---		
2	Room 206/207 Storage	Cinderblock	---	---	---	---		
2	Room 207	Cinderblock	---	---	---	---		
2	Room 208	Cinderblock	---	---	---	---		
2	Room 209	Cinderblock	---	---	---	---		
2	Room 209A	Cinderblock	---	---	---	---		
2	Room 210	Cinderblock	---	---	---	---		
2	Room 211	Cinderblock	---	---	---	---		
2	Room 212	Cinderblock	---	---	---	---		
2	Room 214	Cinderblock	---	---	---	---		
2	Room 215	Cinderblock	---	---	---	---		
2	Room 215/214 Storage	Cinderblock	---	---	---	---		
2	Second Floor Boys Restroom	Cinderblock	---	---	---	---		
2	Second Floor Custodial Closet	Cinderblock	---	---	---	---		
2	Second Floor East Hallway	Cinderblock	---	---	---	---		
2	Second Floor Faculty Copy Room	Cinderblock	---	---	---	---		
2	Second Floor Faculty Restroom	Cinderblock	---	---	---	---		
2	Second Floor Girls Restroom	Cinderblock	---	---	---	---		
2	Second Floor Mechanical Room	Cinderblock	---	---	---	---		
2	Second Floor North Hallway	Cinderblock	---	---	---	---		
2	Second Floor South Hallway	Cinderblock	---	---	---	---		
2	Second Floor West Hallway	Cinderblock	---	---	---	---		
2	West Stairwell	Cinderblock	---	---	---	---		
1	Art Hallway	Concrete	---	---	---	---		
1	Boiler Room	Concrete	---	---	---	---		
1	Boiler Room - Laundry	Concrete	---	---	---	---		
1	Boiler Room - Storage	Concrete	---	---	---	---		
1	Boiler Room - Tunnel	Concrete	---	---	---	---		
1	Boys Locker Room	Concrete	---	---	---	---		
1	Boys Locker Room - Custodial Closet	Concrete	---	---	---	---		
1	Boys Locker Room - Mezzanine	Concrete	---	---	---	---		
1	Boys Locker Room - Office	Concrete	---	---	---	---		
1	Cafeteria	Concrete	---	---	---	---		
1	Counseling Center	Concrete	---	---	---	---		
1	Counseling Center - Conference Room	Concrete	---	---	---	---		
1	Counseling Center - Copy Room	Concrete	---	---	---	---		
1	Counseling Center - Office A	Concrete	---	---	---	---		
1	Counseling Center - Office B	Concrete	---	---	---	---		
1	Counseling Center - Office C	Concrete	---	---	---	---		
1	Counseling Center - Office D	Concrete	---	---	---	---		
1	Counseling Center - Office E	Concrete	---	---	---	---		

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Counseling Center - Restroom	Concrete	---	---	---	---		
1	Gymnasium	Concrete	---	---	---	---		
1	Gymnasium Hallway Boys Restroom	Concrete	---	---	---	---		
1	Gymnasium Hallway Girls Restroom	Concrete	---	---	---	---		
1	Gymnasium Storage A	Concrete	---	---	---	---		
1	Gymnasium/Library Hallway	Concrete	---	---	---	---		
1	Gymnasium/Music Hallway	Concrete	---	---	---	---		
1	Kitchen	Concrete	---	---	---	---		
1	Kitchen - Office	Concrete	---	---	---	---		
1	Kitchen - Serving Area	Concrete	---	---	---	---		
1	Kitchen Hallway - Custodial Closet	Concrete	---	---	---	---		
1	Kitchen Hallway - Dry Storage	Concrete	---	---	---	---		
1	Library	Concrete	---	---	---	---		
1	Library - Audio Visual	Concrete	---	---	---	---		
1	Library - Office	Concrete	---	---	---	---		
1	Main Office	Concrete	---	---	---	---		
1	Main Office - Conference Room	Concrete	---	---	---	---		
1	Main Office - Copy Room	Concrete	---	---	---	---		
1	Main Office - Restroom	Concrete	---	---	---	---		
1	Music Room Storage	Concrete	---	---	---	---		
1	Receiving	Concrete	---	---	---	---		
1	Room 102	Concrete	---	---	---	---		
1	Room 103	Concrete	---	---	---	---		
1	Room 104	Concrete	---	---	---	---		
1	Room 107	Concrete	---	---	---	---		
1	Room 107 - Storage	Concrete	---	---	---	---		
1	Room 108	Concrete	---	---	---	---		
1	Room 108 - Office	Concrete	---	---	---	---		
1	Room 108 - Storage A	Concrete	---	---	---	---		
1	Room 108 - Storage B	Concrete	---	---	---	---		
1	Room 109	Concrete	---	---	---	---		
1	Room 110	Concrete	---	---	---	---		
1	Room 111	Concrete	---	---	---	---		
1	Room 112	Concrete	---	---	---	---		
1	Room 113	Concrete	---	---	---	---		
1	Room 114	Concrete	---	---	---	---		
1	Room 115	Concrete	---	---	---	---		
1	Room 116	Concrete	---	---	---	---		
1	Room 116A	Concrete	---	---	---	---		
1	Room 117	Concrete	---	---	---	---		
1	Room 117A	Concrete	---	---	---	---		
1	Room 118	Concrete	---	---	---	---		
1	Room 118 - Corridor	Concrete	---	---	---	---		
1	Room 118 - Storage A	Concrete	---	---	---	---		
1	Room 118 - Storage B	Concrete	---	---	---	---		

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Room 118 - Storage C	Concrete	---	---	---	---		
1	Room 118 - Storage D	Concrete	---	---	---	---		
1	Room 98	Concrete	---	---	---	---		
1	Stage	Concrete	---	---	---	---		
1	Stage Hallway Storage	Concrete	---	---	---	---		
1	Stage Storage	Concrete	---	---	---	---		
1	Ticket Booth	Concrete	---	---	---	---		
1	Varsity	Concrete	---	---	---	---		
2	Dark Room	Concrete	---	---	---	---		
2	East Stairwell	Concrete	---	---	---	---		
2	Office near Second Floor Boys Restroom	Concrete	---	---	---	---		
2	Room 200	Concrete	---	---	---	---		
2	Room 201	Concrete	---	---	---	---		
2	Room 202	Concrete	---	---	---	---		
2	Room 203	Concrete	---	---	---	---		
2	Room 204	Concrete	---	---	---	---		
2	Room 205	Concrete	---	---	---	---		
2	Room 206	Concrete	---	---	---	---		
2	Room 206/207 Storage	Concrete	---	---	---	---		
2	Room 207	Concrete	---	---	---	---		
2	Room 208	Concrete	---	---	---	---		
2	Room 209	Concrete	---	---	---	---		
2	Room 209A	Concrete	---	---	---	---		
2	Room 210	Concrete	---	---	---	---		
2	Room 211	Concrete	---	---	---	---		
2	Room 212	Concrete	---	---	---	---		
2	Room 214	Concrete	---	---	---	---		
2	Room 215	Concrete	---	---	---	---		
2	Room 215/214 Storage	Concrete	---	---	---	---		
2	Second Floor Boys Restroom	Concrete	---	---	---	---		
2	Second Floor Custodial Closet	Concrete	---	---	---	---		
2	Second Floor East Hallway	Concrete	---	---	---	---		
2	Second Floor Faculty Copy Room	Concrete	---	---	---	---		
2	Second Floor Faculty Restroom	Concrete	---	---	---	---		
2	Second Floor Girls Restroom	Concrete	---	---	---	---		
2	Second Floor Mechanical Room	Concrete	---	---	---	---		
2	Second Floor North Hallway	Concrete	---	---	---	---		
2	Second Floor South Hallway	Concrete	---	---	---	---		
2	Second Floor West Hallway	Concrete	---	---	---	---		
2	West Stairwell	Concrete	---	---	---	---		
1	Exterior	Concrete Overhang	---	---	---	---		
1	Library	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	200 lf	3	
1	Library - Audio Visual	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	68 lf	3	
1	Library - Office	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	68 lf	3	
1	Music Room Storage	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	50 lf	3	

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Room 102	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	60 lf	3	
1	Room 104	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	60 lf	3	
1	Room 107	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	100 lf	3	
1	Room 108	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	156 lf	3	
1	Room 111	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 112	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 113	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 114	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 115	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 116	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 116A	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	52 lf	3	
1	Room 117	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	100 lf	3	
1	Room 117A	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	80 lf	3	
1	Room 118	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	100 lf	3	
1	Room 118 - Corridor	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	30 lf	3	
1	Room 118 - Storage A	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	10 lf	3	
1	Room 118 - Storage B	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	10 lf	3	
1	Room 118 - Storage C	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	10 lf	3	
1	Room 118 - Storage D	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	10 lf	3	
1	Ticket Booth	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	5 lf	3	
1	Varsity	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	130 lf	3	
2	Office near Second Floor Boys Restroom	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	56 lf	3	
2	Room 209A	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 214	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	124 lf	3	
2	Room 215	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	124 lf	3	
2	Room 215/214 Storage	Covebase Adhesive, 4", Black	No	Miscellaneous	Non-Friable	80 lf	3	
1	Room 109	Covebase Adhesive, 4", Blue	No	Miscellaneous	Non-Friable	122 lf	3	
1	Room 110	Covebase Adhesive, 4", Blue	No	Miscellaneous	Non-Friable	122 lf	3	
1	Counseling Center	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	80 lf	3	
1	Counseling Center - Conference Room	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	48 lf	3	
1	Counseling Center - Copy Room	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	44 lf	3	
1	Counseling Center - Office A	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	48 lf	3	
1	Counseling Center - Office B	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	48 lf	3	
1	Counseling Center - Office C	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	48 lf	3	
1	Counseling Center - Office D	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	36 lf	3	
1	Counseling Center - Office E	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	36 lf	3	
1	Main Office	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	60 lf	3	
1	Main Office - Conference Room	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	52 lf	3	
1	Main Office - Copy Room	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	44 lf	3	
1	Room 103	Covebase Adhesive, 4", Grey	No	Miscellaneous	Non-Friable	72 lf	3	
1	Room 98	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	96 lf	3	
2	Dark Room	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	44 lf	3	
2	East Stairwell	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	30 lf	3	
2	Room 200	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 201	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
2	Room 202	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 203	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 204	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 205	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 206	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	120 lf	3	
2	Room 206/207 Storage	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	48 lf	3	
2	Room 207	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	120 lf	3	
2	Room 208	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 209	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 210	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 211	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 212	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	120 lf	3	
2	West Stairwell	Covebase Adhesive, 4", Tan	No	Miscellaneous	Non-Friable	30 lf	3	
1	Library	Covebase, 4", Black	No	Miscellaneous	Non-Friable	200 lf	3	
1	Library - Audio Visual	Covebase, 4", Black	No	Miscellaneous	Non-Friable	68 lf	3	
1	Library - Office	Covebase, 4", Black	No	Miscellaneous	Non-Friable	68 lf	3	
1	Music Room Storage	Covebase, 4", Black	No	Miscellaneous	Non-Friable	50 lf	3	
1	Room 102	Covebase, 4", Black	No	Miscellaneous	Non-Friable	60 lf	3	
1	Room 104	Covebase, 4", Black	No	Miscellaneous	Non-Friable	60 lf	3	
1	Room 107	Covebase, 4", Black	No	Miscellaneous	Non-Friable	100 lf	3	
1	Room 108	Covebase, 4", Black	No	Miscellaneous	Non-Friable	156 lf	3	
1	Room 111	Covebase, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 112	Covebase, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 113	Covebase, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 114	Covebase, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 115	Covebase, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 116	Covebase, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
1	Room 116A	Covebase, 4", Black	No	Miscellaneous	Non-Friable	52 lf	3	
1	Room 117	Covebase, 4", Black	No	Miscellaneous	Non-Friable	100 lf	3	
1	Room 117A	Covebase, 4", Black	No	Miscellaneous	Non-Friable	80 lf	3	
1	Room 118	Covebase, 4", Black	No	Miscellaneous	Non-Friable	100 lf	3	
1	Room 118 - Corridor	Covebase, 4", Black	No	Miscellaneous	Non-Friable	30 lf	3	
1	Room 118 - Storage A	Covebase, 4", Black	No	Miscellaneous	Non-Friable	10 lf	3	
1	Room 118 - Storage B	Covebase, 4", Black	No	Miscellaneous	Non-Friable	10 lf	3	
1	Room 118 - Storage C	Covebase, 4", Black	No	Miscellaneous	Non-Friable	10 lf	3	
1	Room 118 - Storage D	Covebase, 4", Black	No	Miscellaneous	Non-Friable	10 lf	3	
1	Ticket Booth	Covebase, 4", Black	No	Miscellaneous	Non-Friable	5 lf	3	
1	Varsity	Covebase, 4", Black	No	Miscellaneous	Non-Friable	130 lf	3	
2	Office near Second Floor Boys Restroom	Covebase, 4", Black	No	Miscellaneous	Non-Friable	56 lf	3	
2	Room 209A	Covebase, 4", Black	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 214	Covebase, 4", Black	No	Miscellaneous	Non-Friable	124 lf	3	
2	Room 215	Covebase, 4", Black	No	Miscellaneous	Non-Friable	124 lf	3	
2	Room 215/214 Storage	Covebase, 4", Black	No	Miscellaneous	Non-Friable	80 lf	3	
1	Room 109	Covebase, 4", Blue	No	Miscellaneous	Non-Friable	122 lf	3	
1	Room 110	Covebase, 4", Blue	No	Miscellaneous	Non-Friable	122 lf	3	

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Counseling Center	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	80 lf	3	
1	Counseling Center - Conference Room	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	48 lf	3	
1	Counseling Center - Copy Room	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	44 lf	3	
1	Counseling Center - Office A	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	48 lf	3	
1	Counseling Center - Office B	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	48 lf	3	
1	Counseling Center - Office C	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	48 lf	3	
1	Counseling Center - Office D	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	36 lf	3	
1	Counseling Center - Office E	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	36 lf	3	
1	Main Office	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	60 lf	3	
1	Main Office - Conference Room	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	52 lf	3	
1	Main Office - Copy Room	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	44 lf	3	
1	Room 103	Covebase, 4", Grey	No	Miscellaneous	Non-Friable	72 lf	3	
1	Room 98	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	96 lf	3	
2	Dark Room	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	44 lf	3	
2	East Stairwell	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	30 lf	3	
2	Room 200	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 201	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 202	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 203	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 204	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 205	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 206	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	120 lf	3	
2	Room 206/207 Storage	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	48 lf	3	
2	Room 207	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	120 lf	3	
2	Room 208	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 209	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 210	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 211	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	112 lf	3	
2	Room 212	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	120 lf	3	
2	West Stairwell	Covebase, 4", Tan	No	Miscellaneous	Non-Friable	30 lf	3	
1	Counseling Center - Conference Room	Drywall	No	Miscellaneous	Non-Friable	100 sf		
1	Counseling Center - Copy Room	Drywall	No	Miscellaneous	Non-Friable	120 sf		
1	Room 107	Drywall	No	Miscellaneous	Non-Friable	300 sf		
1	Room 108 - Office	Drywall	No	Miscellaneous	Non-Friable	320 sf		
1	Varsity	Drywall	No	Miscellaneous	Non-Friable	1,300 sf		
1	Counseling Center - Restroom	Drywall Ceiling	No	Miscellaneous	Non-Friable	64 sf		
1	Main Office - Restroom	Drywall Ceiling	No	Miscellaneous	Non-Friable	48 sf		
1	Counseling Center - Conference Room	Drywall Mud	No	Miscellaneous	Non-Friable	100 sf		
1	Counseling Center - Copy Room	Drywall Mud	No	Miscellaneous	Non-Friable	120 sf		
1	Room 107	Drywall Mud	No	Miscellaneous	Non-Friable	300 sf		
1	Room 108 - Office	Drywall Mud	No	Miscellaneous	Non-Friable	320 sf		
1	Varsity	Drywall Mud	No	Miscellaneous	Non-Friable	1,300 sf		
1	Counseling Center - Conference Room	Drywall Tape	No	Miscellaneous	Non-Friable	100 sf		
1	Counseling Center - Copy Room	Drywall Tape	No	Miscellaneous	Non-Friable	120 sf		
1	Room 107	Drywall Tape	No	Miscellaneous	Non-Friable	300 sf		

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Room 108 - Office	Drywall Tape	No	Miscellaneous	Non-Friable	320 sf		
1	Varsity	Drywall Tape	No	Miscellaneous	Non-Friable	1,300 sf		
1	Boys Locker Room - Mezzanine	Duct Insulation, Fiberglass	---	---	---	---		
1	Room 107	Duct Insulation, Fiberglass	---	---	---	---		
1	Room 108	Duct Insulation, Fiberglass	---	---	---	---		
1	Boys Locker Room - Mezzanine	Duct Sealant, Grey	No	Miscellaneous	Non-Friable	20 lf		
2	Second Floor Custodial Closet	Duct Sealant, Grey	No	Miscellaneous	Non-Friable	5 lf		
1	Exterior	Exterior Door Caulk, Exterior Side, Grey	No	Miscellaneous	Non-Friable	640 lf	1	
1	Library	Exterior Door Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	East Stairwell	Exterior Door Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	West Stairwell	Exterior Door Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Art Hallway	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	80 lf	1	Present
1	Boiler Room	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Boiler Room - Storage	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Cafeteria	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Gymnasium/Library Hallway	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	120 lf	1	Present
1	Gymnasium/Music Hallway	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	80 lf	1	Present
1	Kitchen Hallway - Dry Storage	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 117	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Stage	Exterior Door Caulk, Interior Side, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Gymnasium	Exterior Door Caulk, Interior Side, White	Yes	Miscellaneous	Non-Friable	80 lf	1	Present
1	Exterior	Exterior Overhang	No	Miscellaneous	Non-Friable	4,000 sf		
1	Exterior	Exterior Pebble Fascia	No	Miscellaneous	Non-Friable	20,000 sf		
1	Exterior	Exterior Vent Caulk, Grey	No	Miscellaneous	Non-Friable	350 lf	1	
1	Exterior	Exterior Wall Joint Caulk, White	No	Miscellaneous	Non-Friable	640 lf	1	
1	Exterior	Exterior Window Caulk, Exterior Side, Grey	No	Miscellaneous	Non-Friable	1,460 lf	1	
1	Library	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
1	Room 102	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
1	Room 104	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
1	Room 109	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 110	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 111	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 112	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 113	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 114	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 115	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 116	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 118 - Storage A	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118 - Storage B	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118 - Storage C	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118 - Storage D	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	East Stairwell	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 200	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 201	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
2	Room 202	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 203	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
2	Room 204	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	80 lf	1	Present
2	Room 205	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
2	Room 210	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 211	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 212	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 214	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
2	Room 215	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
2	Second Floor East Hallway	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	120 lf	1	Present
2	Second Floor West Hallway	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	120 lf	1	Present
2	West Stairwell	Exterior Window Caulk, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Library	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	30 lf	2	Present
1	Room 109	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	2	Present
1	Room 110	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	2	Present
1	Room 111	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
1	Room 112	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
1	Room 113	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
1	Room 114	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
1	Room 115	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
1	Room 116	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	East Stairwell	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	Room 200	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	Room 201	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	Room 202	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	Room 203	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	30 lf	2	Present
2	Room 204	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	40 lf	2	Present
2	Room 205	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	30 lf	2	Present
2	Room 210	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	Room 211	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	Room 212	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	Room 214	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	30 lf	2	Present
2	Room 215	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	30 lf	2	Present
2	Second Floor East Hallway	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	2	Present
2	Second Floor West Hallway	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	60 lf	2	Present
2	West Stairwell	Exterior Window Glaze, Interior Side, Grey	Yes	Miscellaneous	Non-Friable	20 lf	2	Present
2	Room 214	Floor Tile Mastic, 12" x 12", Blue Mottled	No	Miscellaneous	Non-Friable	952 sf		
2	Room 215	Floor Tile Mastic, 12" x 12", Blue Mottled	No	Miscellaneous	Non-Friable	952 sf		
2	Room 215/214 Storage	Floor Tile Mastic, 12" x 12", Blue Mottled	No	Miscellaneous	Non-Friable	312 sf		
1	Room 98	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	560 sf		
2	Dark Room	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	120 sf		
2	East Stairwell	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	Room 200	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 201	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 202	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
2	Room 203	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 204	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 205	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 206	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	Room 206/207 Storage	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	140 sf		
2	Room 207	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	Room 208	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 209	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 210	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 211	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 212	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	Second Floor East Hallway	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	500 sf		
2	Second Floor Faculty Copy Room	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	96 sf		
2	Second Floor North Hallway	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	2,080 sf		
2	Second Floor South Hallway	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	2,080 sf		
2	Second Floor West Hallway	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	500 sf		
2	West Stairwell	Floor Tile Mastic, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
1	Room 107 - Storage	Floor Tile Mastic, 12" x 12", Cream with Tan	No	Miscellaneous	Non-Friable	120 sf		
2	Room 209A	Floor Tile Mastic, 12" x 12", Cream with Tan	No	Miscellaneous	Non-Friable	784 sf		
1	Kitchen Hallway - Custodial Closet	Floor Tile Mastic, 12" x 12", Grey Mottled	No	Miscellaneous	Non-Friable	60 sf		
1	Room 103	Floor Tile Mastic, 12" x 12", Grey Mottled	No	Miscellaneous	Non-Friable	640 sf		
1	Room 108 - Office	Floor Tile Mastic, 12" x 12", Grey Mottled	No	Miscellaneous	Non-Friable	192 sf		
1	Room 108	Floor Tile Mastic, 12" x 12", White with Grey	No	Miscellaneous	Non-Friable	1,408 sf		
1	Ticket Booth	Floor Tile Mastic, 9" x 9", Tan with Grey	No	Miscellaneous	Non-Friable	50 sf		
1	Kitchen Hallway - Dry Storage	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	300 sf		
1	Library - Audio Visual	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	280 sf		
1	Music Room Storage	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	192 sf		
1	Room 102	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	748 sf		
1	Room 104	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	748 sf		
1	Room 107	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	600 sf		
1	Room 109	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	952 sf		
1	Room 110	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	952 sf		
1	Room 111	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	784 sf		
1	Room 112	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	784 sf		
1	Room 113	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	784 sf		
1	Room 114	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	784 sf		
1	Room 115	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	784 sf		
1	Room 116	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	784 sf		
1	Room 116A	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	144 sf		
1	Room 117	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	1,224 sf		
1	Room 118	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	1,224 sf		
1	Room 118 - Corridor	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	180 sf		
1	Room 118 - Storage A	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	48 sf		
1	Room 118 - Storage B	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	48 sf		
1	Room 118 - Storage C	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	48 sf		

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Room 118 - Storage D	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	48 sf		
1	Stage	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	40 sf		
2	Office near Second Floor Boys Restroom	Floor Tile Mastic, 9" x 9", Tan with White	No	Miscellaneous	Non-Friable	180 sf		
2	Room 214	Floor Tile, 12" x 12", Blue Mottled	No	Miscellaneous	Non-Friable	952 sf		
2	Room 215	Floor Tile, 12" x 12", Blue Mottled	No	Miscellaneous	Non-Friable	952 sf		
2	Room 215/214 Storage	Floor Tile, 12" x 12", Blue Mottled	No	Miscellaneous	Non-Friable	312 sf		
1	Room 98	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	560 sf		
2	Dark Room	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	120 sf		
2	East Stairwell	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	Room 200	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 201	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 202	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 203	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 204	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 205	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 206	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	Room 206/207 Storage	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	140 sf		
2	Room 207	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	Room 208	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 209	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 210	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 211	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	784 sf		
2	Room 212	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
2	Second Floor East Hallway	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	500 sf		
2	Second Floor Faculty Copy Room	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	96 sf		
2	Second Floor North Hallway	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	2,080 sf		
2	Second Floor South Hallway	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	2,080 sf		
2	Second Floor West Hallway	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	500 sf		
2	West Stairwell	Floor Tile, 12" x 12", Cream Mottled	No	Miscellaneous	Non-Friable	896 sf		
1	Room 107 - Storage	Floor Tile, 12" x 12", Cream with Tan	No	Miscellaneous	Non-Friable	120 sf		
2	Room 209A	Floor Tile, 12" x 12", Cream with Tan	No	Miscellaneous	Non-Friable	784 sf		
1	Kitchen Hallway - Custodial Closet	Floor Tile, 12" x 12", Grey Mottled	No	Miscellaneous	Non-Friable	60 sf		
1	Room 103	Floor Tile, 12" x 12", Grey Mottled	No	Miscellaneous	Non-Friable	640 sf		
1	Room 108 - Office	Floor Tile, 12" x 12", Grey Mottled	No	Miscellaneous	Non-Friable	192 sf		
1	Room 108	Floor Tile, 12" x 12", White with Grey	No	Miscellaneous	Non-Friable	1,408 sf		
1	Ticket Booth	Floor Tile, 9" x 9", Tan with Grey	Yes	Miscellaneous	Non-Friable	50 sf		Present
1	Kitchen Hallway - Dry Storage	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	300 sf		Present
1	Library - Audio Visual	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	280 sf		Present
1	Music Room Storage	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	192 sf		Present
1	Room 102	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	748 sf		Present
1	Room 104	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	748 sf		Present
1	Room 107	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	600 sf		Present
1	Room 109	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	952 sf		Present
1	Room 110	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	952 sf		Present
1	Room 111	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	784 sf		Present

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Room 112	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	784 sf		Present
1	Room 113	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	784 sf		Present
1	Room 114	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	784 sf		Present
1	Room 115	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	784 sf		Present
1	Room 116	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	784 sf		Present
1	Room 116A	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	144 sf		Present
1	Room 117	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	1,224 sf		Present
1	Room 118	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	1,224 sf		Present
1	Room 118 - Corridor	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	180 sf		Present
1	Room 118 - Storage A	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	48 sf		Present
1	Room 118 - Storage B	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	48 sf		Present
1	Room 118 - Storage C	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	48 sf		Present
1	Room 118 - Storage D	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	48 sf		Present
1	Stage	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	40 sf		Present
2	Office near Second Floor Boys Restroom	Floor Tile, 9" x 9", Tan with White	Yes	Miscellaneous	Non-Friable	180 sf		Present
1	Gymnasium	Gymnasium Wood Floor	No	Miscellaneous	Non-Friable	9,025 sf		
1	Gymnasium Storage A	Hard Plaster Ceiling Edge Caulk, Tan	Assumed	Miscellaneous	Non-Friable	60 lf	1	Present
1	Boys Locker Room	Hard Plaster Ceiling, Rough Texture, Brown Coat	No	Surfacing	Non-Friable	2,040 sf		
1	Boys Locker Room - Custodial Closet	Hard Plaster Ceiling, Rough Texture, Brown Coat	No	Surfacing	Non-Friable	80 sf		
1	Boys Locker Room - Office	Hard Plaster Ceiling, Rough Texture, Brown Coat	No	Surfacing	Non-Friable	180 sf		
1	Gymnasium Hallway Boys Restroom	Hard Plaster Ceiling, Rough Texture, Brown Coat	No	Surfacing	Non-Friable	180 sf		
1	Gymnasium Hallway Girls Restroom	Hard Plaster Ceiling, Rough Texture, Brown Coat	No	Surfacing	Non-Friable	180 sf		
1	Gymnasium Storage A	Hard Plaster Ceiling, Rough Texture, Brown Coat	No	Surfacing	Non-Friable	216 sf		
1	Ticket Booth	Hard Plaster Ceiling, Rough Texture, Brown Coat	No	Surfacing	Non-Friable	50 sf		
1	Boys Locker Room	Hard Plaster Ceiling, Rough Texture, Finish Coat	No	Surfacing	Non-Friable	2,040 sf		
1	Boys Locker Room - Custodial Closet	Hard Plaster Ceiling, Rough Texture, Finish Coat	No	Surfacing	Non-Friable	80 sf		
1	Boys Locker Room - Office	Hard Plaster Ceiling, Rough Texture, Finish Coat	No	Surfacing	Non-Friable	180 sf		
1	Gymnasium Hallway Boys Restroom	Hard Plaster Ceiling, Rough Texture, Finish Coat	No	Surfacing	Non-Friable	180 sf		
1	Gymnasium Hallway Girls Restroom	Hard Plaster Ceiling, Rough Texture, Finish Coat	No	Surfacing	Non-Friable	180 sf		
1	Gymnasium Storage A	Hard Plaster Ceiling, Rough Texture, Finish Coat	No	Surfacing	Non-Friable	216 sf		
1	Ticket Booth	Hard Plaster Ceiling, Rough Texture, Finish Coat	No	Surfacing	Non-Friable	50 sf		
1	Cafeteria	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	600 sf		
1	Kitchen - Office	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	140 sf		
1	Kitchen Hallway - Dry Storage	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	300 sf		
1	Stage Hallway Storage	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	264 sf		
1	Stage Storage	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	200 sf		
2	Second Floor Boys Restroom	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	168 sf		
2	Second Floor Custodial Closet	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	112 sf		
2	Second Floor Faculty Restroom	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	60 sf		
2	Second Floor Girls Restroom	Hard Plaster Ceiling, Smooth, Brown Coat	No	Surfacing	Non-Friable	224 sf		
1	Cafeteria	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	600 sf		
1	Kitchen - Office	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	140 sf		
1	Kitchen Hallway - Dry Storage	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	300 sf		
1	Stage Hallway Storage	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	264 sf		
1	Stage Storage	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	200 sf		

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
2	Second Floor Boys Restroom	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	168 sf		
2	Second Floor Custodial Closet	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	112 sf		
2	Second Floor Faculty Restroom	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	60 sf		
2	Second Floor Girls Restroom	Hard Plaster Ceiling, Smooth, Finish Coat	No	Surfacing	Non-Friable	224 sf		
2	Second Floor Mechanical Room	Hard Plaster Wall, Rough Texture, Brown Coat	No	Surfacing	Non-Friable	560 sf		
2	Second Floor Mechanical Room	Hard Plaster Wall, Rough Texture, Finish Coat	No	Surfacing	Non-Friable	560 sf		
1	Counseling Center	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	800 sf		
1	Counseling Center - Conference Room	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	240 sf		
1	Counseling Center - Copy Room	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	220 sf		
1	Counseling Center - Office A	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	240 sf		
1	Counseling Center - Office B	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	240 sf		
1	Counseling Center - Office C	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	240 sf		
1	Counseling Center - Office D	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	80 sf		
1	Counseling Center - Office E	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	80 sf		
1	Counseling Center - Restroom	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	160 sf		
1	Main Office	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	1,000 sf		
1	Main Office - Conference Room	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	312 sf		
1	Main Office - Restroom	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	168 sf		
1	Room 117	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	204 sf		
1	Room 118	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	204 sf		
2	Room 209	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	300 sf		
2	Room 209A	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	300 sf		
2	Second Floor North Hallway	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	1,500 sf		
2	Second Floor South Hallway	Hard Plaster Wall, Smooth, Brown Coat	No	Surfacing	Non-Friable	1,500 sf		
1	Counseling Center	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	800 sf		
1	Counseling Center - Conference Room	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	240 sf		
1	Counseling Center - Copy Room	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	220 sf		
1	Counseling Center - Office A	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	240 sf		
1	Counseling Center - Office B	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	240 sf		
1	Counseling Center - Office C	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	240 sf		
1	Counseling Center - Office D	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	80 sf		
1	Counseling Center - Office E	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	80 sf		
1	Counseling Center - Restroom	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	160 sf		
1	Main Office	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	1,000 sf		
1	Main Office - Conference Room	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	312 sf		
1	Main Office - Restroom	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	168 sf		
1	Room 117	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	204 sf		
1	Room 118	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	204 sf		
2	Room 209	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	300 sf		
2	Room 209A	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	300 sf		
2	Second Floor North Hallway	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	1,500 sf		
2	Second Floor South Hallway	Hard Plaster Wall, Smooth, Finish Coat	No	Surfacing	Non-Friable	1,500 sf		
1	Boys Locker Room - Mezzanine	HVAC Vibration Dampener, Black	No	Miscellaneous	Non-Friable	60 sf		
2	Second Floor Mechanical Room	HVAC Vibration Dampener, Black	No	Miscellaneous	Non-Friable	20 sf		
1	Boiler Room	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Boiler Room - Laundry	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Boiler Room - Storage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Boys Locker Room	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Boys Locker Room - Custodial Closet	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Boys Locker Room - Office	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Cafeteria	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	120 lf	1	Present
1	Counseling Center	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center - Conference Room	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center - Copy Room	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center - Office A	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center - Office B	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center - Office C	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center - Office D	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center - Office E	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Counseling Center - Restroom	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Gymnasium	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	80 lf	1	Present
1	Gymnasium Hallway Boys Restroom	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Gymnasium Hallway Girls Restroom	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Gymnasium Storage A	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Kitchen	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
1	Kitchen - Office	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Kitchen - Serving Area	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
1	Kitchen Hallway - Custodial Closet	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Kitchen Hallway - Dry Storage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Library	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Library - Audio Visual	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Library - Office	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Main Office	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Main Office - Conference Room	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Main Office - Copy Room	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Main Office - Restroom	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Music Room Storage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Receiving	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 102	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 103	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 104	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 107	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 107 - Storage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 108	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 108 - Storage A	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 108 - Storage B	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 109	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 110	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 111	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 112	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Room 113	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 114	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 115	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 116	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 116A	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 117	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 117A	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Room 118 - Storage A	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118 - Storage B	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118 - Storage C	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 118 - Storage D	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Room 98	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Stage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Stage Hallway Storage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Stage Storage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Ticket Booth	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
1	Varsity	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Dark Room	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	East Stairwell	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	120 lf	1	Present
2	Office near Second Floor Boys Restroom	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Room 200	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 201	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 202	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 203	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 204	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 205	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 206	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Room 206/207 Storage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 207	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 208	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Room 209	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 209A	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Room 210	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Room 211	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Room 212	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Room 214	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Room 215	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Room 215/214 Storage	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
2	Second Floor Boys Restroom	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Second Floor Custodial Closet	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Second Floor Faculty Copy Room	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Second Floor Faculty Restroom	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	Second Floor Girls Restroom	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	20 lf	1	Present
2	West Stairwell	Interior Door Caulk, Tan	Yes	Miscellaneous	Non-Friable	120 lf	1	Present

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
2	Second Floor Mechanical Room	Interior Door Caulk, White	No	Miscellaneous	Non-Friable	20 lf	1	
1	Counseling Center	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Counseling Center - Office A	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Counseling Center - Office B	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Counseling Center - Office C	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Library	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
1	Library - Audio Visual	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	25 lf	2	
1	Library - Office	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	25 lf	2	
1	Main Office	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	60 lf	2	
1	Main Office - Conference Room	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
1	Room 103	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 109	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 110	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 111	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 112	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 113	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 114	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 115	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 116	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
1	Room 98	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
2	East Stairwell	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	80 lf	2	
2	Office near Second Floor Boys Restroom	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 200	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
2	Room 201	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
2	Room 202	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
2	Room 203	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
2	Room 204	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
2	Room 205	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
2	Room 206	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 207	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 208	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 209	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 209A	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 210	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 211	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 212	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 214	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 215	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	15 lf	2	
2	Room 215/214 Storage	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	30 lf	2	
2	West Stairwell	Interior Door Window Glaze, Grey	No	Miscellaneous	Non-Friable	80 lf	2	
2	East Stairwell	Interior Door Window Glaze, White	No	Miscellaneous	Non-Friable	40 lf	2	
2	West Stairwell	Interior Door Window Glaze, White	No	Miscellaneous	Non-Friable	40 lf	2	
1	Boys Locker Room - Office	Interior Window Caulk, Tan	Yes	Miscellaneous	Non-Friable	40 lf	1	Present
1	Ticket Booth	Interior Window Caulk, Tan	Yes	Miscellaneous	Non-Friable	10 lf	1	Present
2	Room 206	Interior Window Caulk, Tan	Yes	Miscellaneous	Non-Friable	80 lf	1	Present

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
2	Room 209	Interior Window Caulk, Tan	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
2	Second Floor East Hallway	Interior Window Caulk, Tan	Yes	Miscellaneous	Non-Friable	80 lf	1	Present
2	Second Floor West Hallway	Interior Window Caulk, Tan	Yes	Miscellaneous	Non-Friable	60 lf	1	Present
1	Boys Locker Room - Office	Interior Window Glaze, White	No	Miscellaneous	Non-Friable	30 lf	2	
2	Room 206	Interior Window Glaze, White	No	Miscellaneous	Non-Friable	40 lf	2	
2	Room 209	Interior Window Glaze, White	No	Miscellaneous	Non-Friable	30 lf	2	
2	Second Floor East Hallway	Interior Window Glaze, White	No	Miscellaneous	Non-Friable	40 lf	2	
2	Second Floor West Hallway	Interior Window Glaze, White	No	Miscellaneous	Non-Friable	30 lf	2	
2	Dark Room	Lab Sink	No	Miscellaneous	Non-Friable	1 #		
2	Room 206/207 Storage	Lab Sink	No	Miscellaneous	Non-Friable	1 #		
2	Room 214	Lab Sink	No	Miscellaneous	Non-Friable	8 #		
2	Room 215	Lab Sink	No	Miscellaneous	Non-Friable	8 #		
2	Room 215/214 Storage	Lab Sink	No	Miscellaneous	Non-Friable	1 #		
1	Varsity	Lay-in Ceiling Tile, 2' x 2', Dots and Gouges	No	Miscellaneous	Friable	864 sf		
1	Kitchen	Lay-in Ceiling Tile, 2' x 2', Drywall	No	Miscellaneous	Friable	1,224 sf		
1	Room 117	Lay-in Ceiling Tile, 2' x 2', Drywall	No	Miscellaneous	Friable	1,224 sf		
1	Room 118	Lay-in Ceiling Tile, 2' x 2', Drywall	No	Miscellaneous	Friable	1,224 sf		
1	Art Hallway	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	780 sf		
1	Cafeteria	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	3,472 sf		
1	Counseling Center	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	360 sf		
1	Counseling Center - Conference Room	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	140 sf		
1	Counseling Center - Copy Room	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	120 sf		
1	Counseling Center - Office A	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	140 sf		
1	Counseling Center - Office B	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	140 sf		
1	Counseling Center - Office C	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	140 sf		
1	Counseling Center - Office D	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	80 sf		
1	Counseling Center - Office E	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	80 sf		
1	Counseling Center - Restroom	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	64 sf		
1	Gymnasium/Library Hallway	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	2,450 sf		
1	Gymnasium/Music Hallway	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	1,250 sf		
1	Kitchen - Serving Area	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	280 sf		
1	Kitchen Hallway - Custodial Closet	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	60 sf		
1	Library	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	2,480 sf		
1	Library - Audio Visual	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	280 sf		
1	Library - Office	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	280 sf		
1	Main Office	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	952 sf		
1	Main Office - Conference Room	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	168 sf		
1	Main Office - Copy Room	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	112 sf		
1	Music Room Storage	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	192 sf		
1	Receiving	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	560 sf		
1	Room 102	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	748 sf		
1	Room 103	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	640 sf		
1	Room 104	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	748 sf		
1	Room 107	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	600 sf		
1	Room 108	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	1,408 sf		

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Room 108 - Office	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	192 sf		
1	Room 109	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	952 sf		
1	Room 110	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	952 sf		
1	Room 111	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
1	Room 112	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
1	Room 113	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
1	Room 114	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
1	Room 115	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
1	Room 116	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
1	Room 116A	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	144 sf		
1	Room 117A	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	384 sf		
1	Room 118 - Corridor	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	180 sf		
1	Room 118 - Storage A	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	48 sf		
1	Room 118 - Storage B	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	48 sf		
1	Room 118 - Storage C	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	48 sf		
1	Room 118 - Storage D	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	48 sf		
1	Room 98	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	560 sf		
2	Dark Room	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	120 sf		
2	East Stairwell	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	448 sf		
2	Office near Second Floor Boys Restroom	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	180 sf		
2	Room 200	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 201	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 202	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 203	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 204	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 205	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 206	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	896 sf		
2	Room 206/207 Storage	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	140 sf		
2	Room 207	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	896 sf		
2	Room 208	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 209	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 209A	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 210	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 211	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	784 sf		
2	Room 212	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	896 sf		
2	Room 214	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	952 sf		
2	Room 215	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	952 sf		
2	Room 215/214 Storage	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	312 sf		
2	Second Floor East Hallway	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	500 sf		
2	Second Floor Faculty Copy Room	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	96 sf		
2	Second Floor North Hallway	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	2,080 sf		
2	Second Floor South Hallway	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	2,080 sf		
2	Second Floor West Hallway	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	500 sf		
2	West Stairwell	Lay-in Ceiling Tile, 2' x 2', Textured	No	Miscellaneous	Friable	448 sf		
1	Main Office	Metal Deck	---	---	---	---		

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Main Office - Conference Room	Metal Deck	---	---	---	---		
1	Main Office - Copy Room	Metal Deck	---	---	---	---		
1	Boiler Room - Tunnel	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	30 lf		Present
1	Boys Locker Room	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	50 lf		Present
1	Boys Locker Room - Office	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	10 lf		Present
1	Gymnasium/Music Hallway	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	10 lf		Present
1	Kitchen Hallway - Custodial Closet	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	5 lf		Present
1	Room 108	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	20 lf		Present
1	Stage	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	5 lf		Present
1	Stage Storage	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	2 lf		Present
1	Varsity	Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap	Assumed	TSI	Friable	10 lf		Present
1	Room 109	Sink Undercoating, Black	Yes	Miscellaneous	Non-Friable	2 #		Present
1	Room 110	Sink Undercoating, Black	Yes	Miscellaneous	Non-Friable	2 #		Present
1	Library - Office	Sink Undercoating, Grey	No	Miscellaneous	Non-Friable	1 #		
1	Room 98	Sink Undercoating, Grey	No	Miscellaneous	Non-Friable	1 #		
1	Varsity	Sink Undercoating, Grey	No	Miscellaneous	Non-Friable	1 #		
1	Stage	Stage Wood Floor	No	Miscellaneous	Non-Friable	896 sf		
1	Art Hallway	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	200 lf		
1	Boiler Room - Tunnel	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	400 lf		
1	Boys Locker Room	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	300 lf		
1	Boys Locker Room - Custodial Closet	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	10 lf		
1	Boys Locker Room - Office	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	50 lf		
1	Gymnasium/Library Hallway	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	500 lf		
1	Gymnasium/Music Hallway	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	300 lf		
1	Kitchen Hallway - Custodial Closet	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	20 lf		
1	Room 107	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	100 lf		
1	Room 107 - Storage	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	20 lf		
1	Room 108	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	100 lf		
1	Room 108 - Storage A	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	20 lf		
1	Room 108 - Storage B	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	20 lf		
1	Stage	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	100 lf		
1	Stage Hallway Storage	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	20 lf		
1	Stage Storage	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	60 lf		
1	Varsity	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	80 lf		
2	Second Floor Custodial Closet	Straight Pipe Insulation, Fiberglass with Canvas Wrap	No	TSI	Friable	15 lf		
1	Boiler Room	Straight Pipe Insulation, New Fiberglass	---	---	---	---		
1	Boiler Room - Laundry	Straight Pipe Insulation, New Fiberglass	---	---	---	---		
1	Boiler Room - Storage	Straight Pipe Insulation, New Fiberglass	---	---	---	---		
1	Boys Locker Room - Mezzanine	Straight Pipe Insulation, New Fiberglass	---	---	---	---		
1	Room 109	Straight Pipe Insulation, New Fiberglass	---	---	---	---		
1	Room 110	Straight Pipe Insulation, New Fiberglass	---	---	---	---		
1	Boiler Room	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Boiler Room - Laundry	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Boiler Room - Storage	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Boys Locker Room - Custodial Closet	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Cafeteria	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	4 #		Present
1	Counseling Center - Copy Room	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Gymnasium Storage A	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	2 #		Present
1	Kitchen	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Kitchen - Serving Area	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	3 #		Present
1	Kitchen Hallway - Custodial Closet	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Kitchen Hallway - Custodial Closet	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Kitchen Hallway - Dry Storage	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Main Office - Copy Room	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	2 #		Present
1	Receiving	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	2 #		Present
1	Room 102	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 107	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 107 - Storage	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 108 - Storage A	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 108 - Storage B	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 116A	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Stage	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Stage Hallway Storage	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Stage Storage	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	Dark Room	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	East Stairwell	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	4 #		Present
2	Room 206/207 Storage	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	2 #		Present
2	Second Floor Custodial Closet	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	Second Floor Faculty Copy Room	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	Second Floor Mechanical Room	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	West Stairwell	Tagged Fire Door	Assumed	Miscellaneous	Non-Friable	4 #		Present
1	Boiler Room	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Boiler Room - Laundry	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Boiler Room - Storage	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Boys Locker Room - Custodial Closet	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Cafeteria	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	4 #		Present
1	Counseling Center - Copy Room	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Gymnasium Storage A	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Kitchen	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Kitchen - Serving Area	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	3 #		Present
1	Kitchen Hallway - Dry Storage	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Main Office - Copy Room	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	2 #		Present
1	Receiving	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 102	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 107	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 107 - Storage	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 108 - Storage A	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Room 108 - Storage B	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Stage	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
1	Stage Hallway Storage	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Stage Storage	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	Dark Room	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	East Stairwell	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	4 #		Present
2	Room 206/207 Storage	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	2 #		Present
2	Second Floor Custodial Closet	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	Second Floor Faculty Copy Room	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	Second Floor Mechanical Room	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	1 #		Present
2	West Stairwell	Tagged Fire Door Frame	Assumed	Miscellaneous	Non-Friable	4 #		Present
1	Art Hallway	Tectum Deck	No	Miscellaneous	Non-Friable	780 sf		
1	Boiler Room	Tectum Deck	No	Miscellaneous	Non-Friable	1,496 sf		
1	Boiler Room - Laundry	Tectum Deck	No	Miscellaneous	Non-Friable	120 sf		
1	Boiler Room - Storage	Tectum Deck	No	Miscellaneous	Non-Friable	320 sf		
1	Boys Locker Room - Mezzanine	Tectum Deck	No	Miscellaneous	Non-Friable	1,900 sf		
1	Gymnasium	Tectum Deck	No	Miscellaneous	Non-Friable	9,025 sf		
1	Room 107 - Storage	Tectum Deck	No	Miscellaneous	Non-Friable	120 sf		
1	Stage	Tectum Deck	No	Miscellaneous	Non-Friable	896 sf		
2	Dark Room	Tectum Deck	No	Miscellaneous	Non-Friable	120 sf		
2	Room 200	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 201	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 202	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 203	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 204	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 205	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 206	Tectum Deck	No	Miscellaneous	Non-Friable	896 sf		
2	Room 207	Tectum Deck	No	Miscellaneous	Non-Friable	896 sf		
2	Room 208	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 209	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 209A	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 210	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 211	Tectum Deck	No	Miscellaneous	Non-Friable	784 sf		
2	Room 212	Tectum Deck	No	Miscellaneous	Non-Friable	896 sf		
2	Room 214	Tectum Deck	No	Miscellaneous	Non-Friable	952 sf		
2	Room 215	Tectum Deck	No	Miscellaneous	Non-Friable	952 sf		
2	Room 215/214 Storage	Tectum Deck	No	Miscellaneous	Non-Friable	312 sf		
2	Second Floor East Hallway	Tectum Deck	No	Miscellaneous	Non-Friable	500 sf		
2	Second Floor Mechanical Room	Tectum Deck	No	Miscellaneous	Non-Friable	952 sf		
2	Second Floor North Hallway	Tectum Deck	No	Miscellaneous	Non-Friable	2,080 sf		
2	Second Floor South Hallway	Tectum Deck	No	Miscellaneous	Non-Friable	2,080 sf		
2	Second Floor West Hallway	Tectum Deck	No	Miscellaneous	Non-Friable	500 sf		
1	Gymnasium	Tectum Wall Panels	Assumed	Miscellaneous	Non-Friable	sf		Present
1	Gymnasium	Tectum Wall Panels	Assumed	Miscellaneous	Non-Friable	900 sf		Present

TABLE OF FUNCTIONAL SPACE BY HOMOGENOUS AREAS

Floor	Functional Space	Material Description	ACM	Category	Friable	Quantity	Notes	Status
1	Art Hallway	Terrazzo Floor	---	---	---	---		
1	Gymnasium/Library Hallway	Terrazzo Floor	---	---	---	---		
1	Gymnasium/Music Hallway	Terrazzo Floor	---	---	---	---		
2	East Stairwell	Terrazzo Floor	---	---	---	---		
2	West Stairwell	Terrazzo Floor	---	---	---	---		

Notes:

- 1 Door, window and other caulk materials quantified in linear footage. To obtain square footage the liner footage should be multiplied by the width of the caulk (approximately 0.04 feet).
- 2 Window glazing materials quantified in linear footage. To obtain square footage the liner footage should be multiplied by the width of the caulk (approximately 0.08 feet).
- 3 Covebase and covebase adhesive quantified in linear footage. To obtain square footage the liner footage should be multiplied by the height of the covebase (approximately 0.33 feet).

Status:

Only provided for asbestos-containing materials. This can be changed to "Abated" once the material has been removed.

APPENDIX D

Bulk Sample Results

BULK SAMPLE RESULTS

AEG collected a total of hundred and thirty-five (135) bulk samples during the on-site activities of the NESHAPs Asbestos Inspection. The bulk sample results are documented on the following pages and a copy of the laboratory results follow AEG's report. A total of hundred and twenty-five (125) samples were analyzed.

Bulk Sampling and Laboratory Information

The information listed below is provided to summarize pertinent information regarding the collection and analysis of the bulk samples.

Bulk Sampling Information

Dates of Sampling: February 13-28, 2024

Name of Accredited Inspector(s) who collected Bulk Samples:

Name of Inspector: Ms. Tiffany Fell
Accreditation Number: A46672
State of Accreditation: Michigan
Accred. Exp. Date: October 21, 2024
Training Exp. Date: May 25, 2025

Name of Accredited Inspector(s) who collected Bulk Samples:

Name of Inspector: Mr. Jordan Spratt
Accreditation Number: A61912
State of Accreditation: Michigan
Accred. Exp. Date: October 18, 2024
Training Exp. Date: September 8, 2024

Sampling Strategies

All samples collected by AEG are collected in accordance with either the applicable sections of the EPA's AHERA regulation (40 CFR 763.86), the OSHA asbestos standard (29 CFR 1926.1101) or the EPA's Asbestos in Buildings: Simplified Sampling Scheme for Friable Surfacing Materials.

Laboratory Information

Name of Laboratory: APEX Research Laboratories
Address of Laboratory: 7717 Kensington Court.
Brighton, Michigan 48116
Name of Analyst: Robert T. Letarte
Signature of Analyst: See Attached Laboratory Results Sheet
NVLAP Number: 102118-0

Laboratory Statement of Accreditation:

All samples collected by AEG are analyzed for asbestos by laboratories accredited under the National Voluntary Laboratory Accreditation Program (NVLAP), in accordance with 40 CFR, Part 763.87(a). This program is provided under the auspices of the United States Department of Commerce National Institute of Standards and Technology. The NVLAP Accreditation Number for the laboratory that performed the asbestos bulk analysis on the samples collected is provided above and noted on the Official Laboratory Results.

ASBESTOS BULK SAMPLE ANALYSIS RESULTS

Client: Southfield Public Schools
Building: Thompson K-8 Campus
Location(s): Throughout

Samples Collected By: Ms. Tiffany Fell
Samples Analyzed By: Apex Research, Inc.
Sample Analysis Date: 2/29/2024

Sample ID	Date Collected	Material Description	Functional Space	Location
001A	2/28/2024	Floor Tile, 12" x 12", Blue Mottled	Room 215	No Asbestos Observed
001A	2/28/2024	Floor Tile Mastic, 12" x 12", Blue Mottled	Room 215	No Asbestos Observed
001B	2/28/2024	Floor Tile, 12" x 12", Blue Mottled	Room 214	No Asbestos Observed
001B	2/28/2024	Floor Tile Mastic, 12" x 12", Blue Mottled	Room 214	No Asbestos Observed
002A	2/28/2024	Lay-in Ceiling Tile, 2' x 2', Textured	Room 210	No Asbestos Observed
002B	2/28/2024	Lay-in Ceiling Tile, 2' x 2', Textured	Room 109	No Asbestos Observed
003A	2/28/2024	Exterior Window Caulk, Interior Side, Grey	Room 202	5% Chrysotile Asbestos
003B	2/28/2024	Exterior Window Caulk, Interior Side, Grey	Room 116	Not Analyzed
004A	2/28/2024	Exterior Window Glaze, Interior Side, Grey	Room 202	5% Chrysotile Asbestos
004B	2/28/2024	Exterior Window Glaze, Interior Side, Grey	Room 116	Not Analyzed
005A	2/28/2024	Covebase, 4", Black	Room 214	No Asbestos Observed
005A	2/28/2024	Covebase Adhesive, 4", Black	Room 214	No Asbestos Observed
005B	2/28/2024	Covebase, 4", Black	Room 111	No Asbestos Observed
005B	2/28/2024	Covebase Adhesive, 4", Black	Room 111	No Asbestos Observed
007A	2/28/2024	Interior Door Caulk, Tan	Room 211	5% Chrysotile Asbestos
007B	2/28/2024	Interior Door Caulk, Tan	Room 203	Not Analyzed
008A	2/28/2024	Interior Door Window Glaze, Grey	Room 211	No Asbestos Observed
008B	2/28/2024	Interior Door Window Glaze, Grey	Room 203	No Asbestos Observed
009A	2/28/2024	Lab Sink	Room 215	No Asbestos Observed
009B	2/28/2024	Lab Sink	Room 214	No Asbestos Observed
010A	2/28/2024	Straight Pipe Insulation, Fiberglass with Canvas Wrap	Second Floor Custodial Closet	No Asbestos Observed
010B	2/28/2024	Straight Pipe Insulation, Fiberglass with Canvas Wrap	Varsity	No Asbestos Observed
010C	2/28/2024	Straight Pipe Insulation, Fiberglass with Canvas Wrap	Varsity	No Asbestos Observed
011A	2/28/2024	Duct Sealant, Grey	Second Floor Custodial Closet	No Asbestos Observed
011B	2/28/2024	Duct Sealant, Grey	Boys Locker Room - Mezzanine	No Asbestos Observed
012A	2/28/2024	Hard Plaster Ceiling, Smooth, Finish Coat	Second Floor Custodial Closet	No Asbestos Observed
012A	2/28/2024	Hard Plaster Ceiling, Smooth, Brown Coat	Second Floor Custodial Closet	No Asbestos Observed
012B	2/28/2024	Hard Plaster Ceiling, Smooth, Finish Coat	Second Floor Girls Restroom	No Asbestos Observed
012B	2/28/2024	Hard Plaster Ceiling, Smooth, Brown Coat	Second Floor Girls Restroom	No Asbestos Observed
012C	2/28/2024	Hard Plaster Ceiling, Smooth, Finish Coat	Kitchen Hallway - Dry Storage	No Asbestos Observed
012C	2/28/2024	Hard Plaster Ceiling, Smooth, Brown Coat	Kitchen Hallway - Dry Storage	No Asbestos Observed
012D	2/28/2024	Hard Plaster Ceiling, Smooth, Finish Coat	Kitchen - Office	No Asbestos Observed
012D	2/28/2024	Hard Plaster Ceiling, Smooth, Brown Coat	Kitchen - Office	No Asbestos Observed
012E	2/28/2024	Hard Plaster Ceiling, Smooth, Finish Coat	Stage Storage	No Asbestos Observed
012E	2/28/2024	Hard Plaster Ceiling, Smooth, Brown Coat	Stage Storage	No Asbestos Observed
013A	2/28/2024	Hard Plaster Wall, Rough Texture, Finish coat	Second Floor Mechanical Room	No Asbestos Observed
013A	2/28/2024	Hard Plaster Wall, Rough Texture, Brown Coat	Second Floor Mechanical Room	No Asbestos Observed
013B	2/28/2024	Hard Plaster Wall, Rough Texture, Finish Coat	Second Floor Mechanical Room	No Asbestos Observed
013B	2/28/2024	Hard Plaster Wall, Rough Texture, Brown Coat	Second Floor Mechanical Room	No Asbestos Observed

ASBESTOS BULK SAMPLE ANALYSIS RESULTS

Client: Southfield Public Schools
Building: Thompson K-8 Campus
Location(s): Throughout

Samples Collected By: Ms. Tiffany Fell
Samples Analyzed By: Apex Research, Inc.
Sample Analysis Date: 2/29/2024

Sample ID	Date Collected	Material Description	Functional Space	Location
013C	2/28/2024	Hard Plaster Wall, Rough Texture, Finish Coat	Second Floor Mechanical Room	No Asbestos Observed
013C	2/28/2024	Hard Plaster Wall, Rough Texture, Brown Coat	Second Floor Mechanical Room	No Asbestos Observed
014A	2/28/2024	Interior Door Caulk, White	Second Floor Mechanical Room	No Asbestos Observed
014B	2/28/2024	Interior Door Caulk, White	Second Floor Mechanical Room	No Asbestos Observed
015A	2/28/2024	HVAC Vibration Dampener, Black	Second Floor Mechanical Room	No Asbestos Observed
015B	2/28/2024	HVAC Vibration Dampener, Black	Boys Locker Room - Mezzanine	No Asbestos Observed
016A	2/28/2024	Floor Tile, 12" x 12", Cream Mottled	Room 211	No Asbestos Observed
016A	2/28/2024	Floor Tile Mastic, 12" x 12", Cream Mottled	Room 211	No Asbestos Observed
016B	2/28/2024	Floor Tile, 12" x 12", Cream Mottled	Room 202	No Asbestos Observed
016B	2/28/2024	Floor Tile Mastic, 12" x 12", Cream Mottled	Room 202	No Asbestos Observed
017A	2/28/2024	Covebase, 4", Tan	Room 202	No Asbestos Observed
017A	2/28/2024	Covebase Adhesive, 4", Tan	Room 202	No Asbestos Observed
017B	2/28/2024	Covebase, 4", Tan	West Stairwell	No Asbestos Observed
017B	2/28/2024	Covebase Adhesive, 4", Tan	West Stairwell	No Asbestos Observed
018A	2/28/2024	Floor Tile, 9" x 9", Tan with White	Office near Second Floor Boys Restroom	5% Chrysotile Asbestos
018A	2/28/2024	Floor Tile Mastic, 9" x 9", Tan with White	Office near Second Floor Boys Restroom	No Asbestos Observed
018B	2/28/2024	Floor Tile, 9" x 9", Tan with White	Room 109	Not Analyzed
018B	2/28/2024	Floor Tile Mastic, 9" x 9", Tan with White	Room 109	No Asbestos Observed
019A	2/28/2024	Hard Plaster Wall, Smooth, Finish coat	Room 209	No Asbestos Observed
019A	2/28/2024	Hard Plaster Wall, Smooth, Brown Coat	Room 209	No Asbestos Observed
019B	2/28/2024	Hard Plaster Wall, Smooth, Finish Coat	Room 117	No Asbestos Observed
019B	2/28/2024	Hard Plaster Wall, Smooth, Brown Coat	Room 117	No Asbestos Observed
019C	2/28/2024	Hard Plaster Wall, Smooth, Finish Coat	Counseling Center - Office A	No Asbestos Observed
019C	2/28/2024	Hard Plaster Wall, Smooth, Brown Coat	Counseling Center - Office A	No Asbestos Observed
019D	2/28/2024	Hard Plaster Wall, Smooth, Finish Coat	Counseling Center - Copy Room	No Asbestos Observed
019D	2/28/2024	Hard Plaster Wall, Smooth, Brown Coat	Counseling Center - Copy Room	No Asbestos Observed
019E	2/28/2024	Hard Plaster Wall, Smooth, Finish Coat	Main Office	No Asbestos Observed
019E	2/28/2024	Hard Plaster Wall, Smooth, Brown Coat	Main Office	No Asbestos Observed
020A	2/28/2024	Interior Window Caulk, Tan	Room 206	2% Chrysotile Asbestos
020B	2/28/2024	Interior Window Caulk, Tan	Ticket Booth	Not Analyzed
021A	2/28/2024	Interior Window Glaze, White	Room 206	No Asbestos Observed
021B	2/28/2024	Interior Window Glaze, White	Second Floor West Hallway	No Asbestos Observed
022A	2/28/2024	Floor Tile, 12" x 12", Cream with Tan	Room 209A	No Asbestos Observed
022A	2/28/2024	Floor Tile Mastic, 12" x 12", Cream with Tan	Room 209A	No Asbestos Observed
022B	2/28/2024	Floor Tile, 12" x 12", Cream with Tan	Room 107 - Storage	No Asbestos Observed
022B	2/28/2024	Floor Tile Mastic, 12" x 12", Cream with Tan	Room 107 - Storage	No Asbestos Observed
023A	2/28/2024	Interior Door Window Glaze, White	East Stairwell	No Asbestos Observed
023B	2/28/2024	Interior Door Window Glaze, White	West Stairwell	No Asbestos Observed
024A	2/28/2024	Exterior Door Caulk, Interior Side, Grey	West Stairwell	5% Chrysotile Asbestos

ASBESTOS BULK SAMPLE ANALYSIS RESULTS

Client: Southfield Public Schools
Building: Thompson K-8 Campus
Location(s): Throughout

Samples Collected By: Ms. Tiffany Fell
Samples Analyzed By: Apex Research, Inc.
Sample Analysis Date: 2/29/2024

Sample ID	Date Collected	Material Description	Functional Space	Location
024B	2/28/2024	Exterior Door Caulk, Interior Side, Grey	Library	Not Analyzed
025A	2/28/2024	Floor Tile, 9" x 9", Tan with Grey	Ticket Booth	5% Chrysotile Asbestos
025A	2/28/2024	Floor Tile Mastic, 9" x 9", Tan with Grey	Ticket Booth	No Asbestos Observed
025B	2/28/2024	Floor Tile, 9" x 9", Tan with Grey	Ticket Booth	Not Analyzed
025B	2/28/2024	Floor Tile Mastic, 9" x 9", Tan with Grey	Ticket Booth	No Asbestos Observed
026A	2/28/2024	Hard Plaster Ceiling, Rough Texture, Finish Coat	Ticket Booth	No Asbestos Observed
026A	2/28/2024	Hard Plaster Ceiling, Rough Texture, Brown Coat	Ticket Booth	No Asbestos Observed
026B	2/28/2024	Hard Plaster Ceiling, Rough Texture, Finish Coat	Gymnasium Storage A	No Asbestos Observed
026B	2/28/2024	Hard Plaster Ceiling, Rough Texture, Brown Coat	Gymnasium Storage A	No Asbestos Observed
026C	2/28/2024	Hard Plaster Ceiling, Rough Texture, Finish Coat	Boys Locker Room - Custodial Closet	No Asbestos Observed
026C	2/28/2024	Hard Plaster Ceiling, Rough Texture, Brown Coat	Boys Locker Room - Custodial Closet	No Asbestos Observed
028A	2/28/2024	Exterior Door Caulk, Interior Side, White	Gymnasium	2% Chrysotile Asbestos
028B	2/28/2024	Exterior Door Caulk, Interior Side, White	Gymnasium	Not Analyzed
032A	2/28/2024	Drywall	Varsity	No Asbestos Observed
032B	2/28/2024	Drywall	Counseling Center - Copy Room	No Asbestos Observed
033A	2/28/2024	Drywall Mud	Varsity	No Asbestos Observed
033B	2/28/2024	Drywall Mud	Counseling Center - Copy Room	No Asbestos Observed
034A	2/28/2024	Drywall Tape	Varsity	No Asbestos Observed
034B	2/28/2024	Drywall Tape	Counseling Center - Copy Room	No Asbestos Observed
035A	2/28/2024	Lay-in Ceiling Tile, 2' x 2', Dots and Gouges	Varsity	No Asbestos Observed
035B	2/28/2024	Lay-in Ceiling Tile, 2' x 2', Dots and Gouges	Varsity	No Asbestos Observed
036A	2/28/2024	Sink Undercoating, Grey	Varsity	No Asbestos Observed
036B	2/28/2024	Sink Undercoating, Grey	Room 98	No Asbestos Observed
037A	2/28/2024	Carpet Adhesive, Yellow	Varsity	No Asbestos Observed
037B	2/28/2024	Carpet Adhesive, Yellow	Room 107	No Asbestos Observed
038A	2/28/2024	Exterior Door Caulk, Interior Side, Tan	Room 118	5% Chrysotile Asbestos
038B	2/28/2024	Exterior Door Caulk, Interior Side, Tan	Art Hallway	Not Analyzed
039A	2/28/2024	Covebase, 4", Grey	Counseling Center	No Asbestos Observed
039A	2/28/2024	Covebase Adhesive, 4", Grey	Counseling Center	No Asbestos Observed
039B	2/28/2024	Covebase, 4", Grey	Main Office	No Asbestos Observed
039B	2/28/2024	Covebase Adhesive, 4", Grey	Main Office	No Asbestos Observed
040A	2/28/2024	Drywall Ceiling	Counseling Center - Restroom	No Asbestos Observed
040B	2/28/2024	Drywall Ceiling	Main Office - Restroom	No Asbestos Observed
041A	2/28/2024	Sink Undercoating, Black	Room 110	5% Chrysotile Asbestos
041B	2/28/2024	Sink Undercoating, Black	Room 109	Not Analyzed
042A	2/28/2024	Covebase, 4", Blue	Room 110	No Asbestos Observed
042A	2/28/2024	Covebase Adhesive, 4", Blue	Room 110	No Asbestos Observed
042B	2/28/2024	Covebase, 4", Blue	Room 109	No Asbestos Observed
042B	2/28/2024	Covebase Adhesive, 4", Blue	Room 109	No Asbestos Observed

ASBESTOS BULK SAMPLE ANALYSIS RESULTS

Client: Southfield Public Schools
Building: Thompson K-8 Campus
Location(s): Throughout

Samples Collected By: Ms. Tiffany Fell
Samples Analyzed By: Apex Research, Inc.
Sample Analysis Date: 2/29/2024

Sample ID	Date Collected	Material Description	Functional Space	Location
043A	2/28/2024	Floor Tile, 12" x 12", White with Grey	Room 108	No Asbestos Observed
043A	2/28/2024	Floor Tile Mastic, 12" x 12", White with Grey	Room 108	No Asbestos Observed
043B	2/28/2024	Floor Tile, 12" x 12", White with Grey	Room 108	No Asbestos Observed
043B	2/28/2024	Floor Tile Mastic, 12" x 12", White with Grey	Room 108	No Asbestos Observed
044A	2/28/2024	Floor Tile, 12" x 12", Grey Mottled	Room 108 - Office	No Asbestos Observed
044A	2/28/2024	Floor Tile Mastic, 12" x 12", Grey Mottled	Room 108 - Office	No Asbestos Observed
044B	2/28/2024	Floor Tile, 12" x 12", Grey Mottled	Room 103	No Asbestos Observed
044B	2/28/2024	Floor Tile Mastic, 12" x 12", Grey Mottled	Room 103	No Asbestos Observed
045A	2/28/2024	Lay-in Ceiling Tile, 2' x 2', Drywall	Room 118	No Asbestos Observed
045B	2/28/2024	Lay-in Ceiling Tile, 2' x 2', Drywall	Kitchen	No Asbestos Observed
046A	2/28/2024	Exterior Door Caulk, Exterior Side, Grey	Exterior	No Asbestos Observed
046B	2/28/2024	Exterior Door Caulk, Exterior Side, Grey	Exterior	No Asbestos Observed
047A	2/28/2024	Exterior Window Caulk, Exterior Side, Grey	Exterior	No Asbestos Observed
047B	2/28/2024	Exterior Window Caulk, Exterior Side, Grey	Exterior	No Asbestos Observed
048A	2/28/2024	Exterior Vent Caulk, Grey	Exterior	No Asbestos Observed
048B	2/28/2024	Exterior Vent Caulk, Grey	Exterior	No Asbestos Observed
049A	2/28/2024	Exterior Wall Joint Caulk, White	Exterior	No Asbestos Observed
049B	2/28/2024	Exterior Wall Joint Caulk, White	Exterior	No Asbestos Observed
001A	6/24/2024	Exterior Pebble Fascia	Exterior - Main Office	No Asbestos Observed
001B	6/24/2024	Exterior Pebble Fascia	Exterior - Receiving	No Asbestos Observed
002A	6/24/2024	Exterior Overhang	Exterior - Main Office	No Asbestos Observed
002B	6/24/2024	Exterior Overhang	Exterior - Receiving	No Asbestos Observed
		Concrete		
		Cinderblock		
		Adhesive (Gluepods) Chalkboard/Whiteboard		
		Tagged Fire Door		
		Tagged Fire Door Frame		
		Tectum Deck		
		Ceramic Floor		
		Terrazzo Floor		
		Gymnasium Wood Floor		
		Tectum Wall Panels		
		Hard Plaster Ceiling Edge Caulk, Tan		
		Packed Pipe Fitting Insulation on Fiberglass with Canvas Wrap		
		Duct Insulation, Fiberglass		
		Straight Pipe Insulation, New Fiberglass		

ASBESTOS BULK SAMPLE ANALYSIS RESULTS

Client: Southfield Public Schools
Building: Thompson K-8 Campus
Location(s): Throughout

Samples Collected By: Ms. Tiffany Fell
Samples Analyzed By: Apex Research, Inc.
Sample Analysis Date: 2/29/2024

Sample ID	Date Collected	Material Description	Functional Space	Location
		Stage Wood Floor		
		Metal Deck		
		Concrete Overhang		

Notes:

Official Laboratory Results are attached.

Asbestos-Containing Materials (ACM) means "Any material or product which contains more than 1% asbestos". (40 CFR 763.83)

Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 01 Cust. #: AE230757-001A Material: Floor Tile, 12x12, Blue Mottled Location: Room 215 Appearance: blue,nonfibrous,homogenous Layer: 1 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 01a Cust. #: AE230757-001A Material: Mastic Location: Room 215 Appearance: yellow,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 02 Cust. #: AE230757-001B Material: Floor Tile, 12x12, Blue Mottled Location: Room 214 Appearance: blue,nonfibrous,homogenous Layer: 1 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



NVLAP Lab Code 102118-0

APEX Research Inc., 7717 Kensington Ct., Brighton, MI 48116
(734) 449-9990, Fax (734) 449-9991

Page 1 of 45

Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 02a Cust. #: AE230757-001B Material: Mastic Location: Room 214 Appearance: yellow,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 03 Cust. #: AE230757-002A Material: Lay-in Ceiling Tile, 2x2, Textured Location: Room 210 Appearance: white,fibrous,homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Mineral Wool - 80% Other - 20%
Lab ID #: 109041 - 04 Cust. #: AE230757-002B Material: Lay-in Ceiling Tile, 2x2, Textured Location: Room 109 Appearance: white,fibrous,homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Mineral Wool - 90% Other - 10%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 05

Asbestos Present: **YES**

Other - 95%

Cust. #: AE230757-003A

Chrysotile - 5%

Material: Exterior Window Caulk, Interior Side, Grey

Location: Room 202

Appearance: grey, fibrous, homogenous

Layer: 1 of 1

Lab ID #: 109041 - 06

Asbestos Present:

Cust. #: AE230757-003B

Material: Exterior Window Caulk, Interior Side, Grey

Location: Room 116

NOT ANALYZED

Appearance:

Layer: 1 of 1

Lab ID #: 109041 - 07

Asbestos Present: **YES**

Other - 95%

Cust. #: AE230757-004A

Chrysotile - 5%

Material: Exterior Window Glaze, Interior Side, Grey

Location: Room 202

Appearance: grey, fibrous, homogenous

Layer: 1 of 1

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



NVLAP Lab Code 102118-0

APEX Research Inc., 7717 Kensington Ct., Brighton, MI 48116
(734) 449-9990, Fax (734) 449-9991

Page 3 of 45

Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 08
Cust. #: AE230757-004B
Material: Exterior Window Glaze, Interior Side, Grey
Location: Room 116
Appearance:
Layer: 1 of 1

Asbestos Present:

NOT ANALYZED

Lab ID #: 109041 - 09
Cust. #: AE230757-005A
Material: Cove Base, 4, Black
Location: Room 214
Appearance: black, nonfibrous, homogenous
Layer: 1 of 2

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #: 109041 - 09a
Cust. #: AE230757-005A
Material: Adhesive
Location: Room 214
Appearance: brown, nonfibrous, homogenous
Layer: 2 of 2

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 10 Cust. #: AE230757-005B Material: Cove Base, 4, Black Location: Room 111 Appearance: black,nonfibrous,homogenous Layer: 1 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 10a Cust. #: AE230757-005B Material: Adhesive Location: Room 111 Appearance: brown,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 11 Cust. #: AE230757-007A Material: Interior Door Caulk, Tan Location: Room 211 Appearance: brown,fibrous,homogenous Layer: 1 of 1	Asbestos Present: YES Chrysotile - 5%	Other - 95%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 12
Cust. #: AE230757-007B
Material: Interior Door Caulk, Tan
Location: Room 203
Appearance:
Layer: 1 of 1

Asbestos Present:

NOT ANALYZED

Lab ID #: 109041 - 13
Cust. #: AE230757-008A
Material: Interior Door Window Glaze, Grey
Location: Room 211
Appearance: clear, nonfibrous, homogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #: 109041 - 14
Cust. #: AE230757-008B
Material: Interior Door Window Glaze, Grey
Location: Room 203
Appearance: clear, nonfibrous, homogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



NVLAP Lab Code 102118-0

APEX Research Inc., 7717 Kensington Ct., Brighton, MI 48116
(734) 449-9990, Fax (734) 449-9991

Page 6 of 45

Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 15 Cust. #: AE230757-009A Material: Lab Sink Location: Room 215 Appearance: black,nonfibrous,homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 16 Cust. #: AE230757-009B Material: Lab Sink Location: Room 214 Appearance: black,nonfibrous,homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 17 Cust. #: AE230757-010A Material: Straight Pipe Insulation, Canvas Wrap Location: 2nd Floor Custodial Closet Appearance: yellow,fibrous,nonhomogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Cellulose - 40% Fiberglass - 30% Other - 30%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



NVLAP Lab Code 102118-0

APEX Research Inc., 7717 Kensington Ct., Brighton, MI 48116
(734) 449-9990, Fax (734) 449-9991

Page 7 of 45

Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 18 Cust. #: AE230757-010B Material: Straight Pipe Insulation, Canvas Wrap Location: Varsity Appearance: yellow, fibrous, nonhomogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Cellulose - 30% Fiberglass - 40% Other - 30%
Lab ID #: 109041 - 19 Cust. #: AE230757-010C Material: Straight Pipe Insulation, Canvas Wrap Location: Varsity Appearance: yellow, fibrous, nonhomogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Cellulose - 30% Fiberglass - 40% Other - 30%
Lab ID #: 109041 - 20 Cust. #: AE230757-011A Material: Duct Sealant, Grey Location: 2nd Floor Custodial Closet Appearance: grey, nonfibrous, homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 21 Cust. #: AE230757-011B Material: Duct Sealant, Grey Location: Boy's Locker Room - Mezzanine Appearance: grey,nonfibrous,homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 22 Cust. #: AE230757-012A Material: Hard Plaster Ceiling, Smooth, Finish Coat Location: 2nd Floor Custodial Closet Appearance: white,nonfibrous,homogenous Layer: 1 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 22a Cust. #: AE230757-012A Material: Hard Plaster Ceiling, Smooth, Brown Coat Location: 2nd Floor Custodial Closet Appearance: grey,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Cellulose - 1% Other - 99%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 23
Cust. #: AE230757-012B
Material: Hard Plaster Ceiling, Smooth, Finish Coat
Location: 2nd Floor Girl's Restroom
Appearance: white, nonfibrous, homogenous
Layer: 1 of 2

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #: 109041 - 23a
Cust. #: AE230757-012B
Material: Hard Plaster Ceiling, Smooth, Brown Coat
Location: 2nd Floor Girl's Restroom
Appearance: grey, nonfibrous, homogenous
Layer: 2 of 2

Asbestos Present: **NO**
No Asbestos Observed

Cellulose - 1%
Other - 99%

Lab ID #: 109041 - 24
Cust. #: AE230757-012C
Material: Hard Plaster Ceiling, Smooth, Finish Coat
Location: Kitchen Hallway - Dry Storage
Appearance: white, nonfibrous, homogenous
Layer: 1 of 2

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 24a
Cust. #: AE230757-012C
Material: Hard Plaster Ceiling, Smooth, Brown Coat
Location: Kitchen Hallway - Dry Storage
Appearance: grey,nonfibrous,homogenous
Layer: 2 of 2

Asbestos Present: **NO**
No Asbestos Observed

Cellulose - 1%
Other - 99%

Lab ID #: 109041 - 25
Cust. #: AE230757-012D
Material: Hard Plaster Ceiling, Smooth, Finish Coat
Location: Kitchen - Office
Appearance: white,nonfibrous,homogenous
Layer: 1 of 2

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #: 109041 - 25a
Cust. #: AE230757-012D
Material: Hard Plaster Ceiling, Smooth, Brown Coat
Location: Kitchen - Office
Appearance: grey,nonfibrous,homogenous
Layer: 2 of 2

Asbestos Present: **NO**
No Asbestos Observed

Cellulose - 1%
Other - 99%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 26
Cust. #: AE230757-012F
Material: Hard Plaster Ceiling, Smooth, Finish Coat
Location: Stage Storage
Appearance: white, nonfibrous, homogenous
Layer: 1 of 2

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #: 109041 - 26a
Cust. #: AE230757-012F
Material: Hard Plaster Ceiling, Smooth, Brown Coat
Location: Stage Storage
Appearance: grey, nonfibrous, homogenous
Layer: 2 of 2

Asbestos Present: **NO**
No Asbestos Observed

Cellulose - 1%
Other - 99%

Lab ID #: 109041 - 27
Cust. #: AE230757-013A
Material: Hard Plaster Wall, Rough Texture, Finish Coat
Location: 2nd Floor Mechanical Room
Appearance: white, nonfibrous, homogenous
Layer: 1 of 2

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 27a	Asbestos Present: NO	Cellulose - 1%
Cust. #: AE230757-013A	No Asbestos Observed	Other - 99%
Material: Hard Plaster Wall, Rough Texture, Brown Coat		
Location: 2nd Floor Mechanical Room		
Appearance: grey, nonfibrous, homogenous		
Layer: 2 of 2		

Lab ID #: 109041 - 28	Asbestos Present: NO	Other - 100%
Cust. #: AE230757-013B	No Asbestos Observed	
Material: Hard Plaster Wall, Rough Texture, Finish Coat		
Location: 2nd Floor Mechanical Room		
Appearance: white, nonfibrous, homogenous		
Layer: 1 of 2		

Lab ID #: 109041 - 28a	Asbestos Present: NO	Cellulose - 1%
Cust. #: AE230757-013B	No Asbestos Observed	Other - 99%
Material: Hard Plaster Wall, Rough Texture, Brown Coat		
Location: 2nd Floor Mechanical Room		
Appearance: grey, nonfibrous, homogenous		
Layer: 2 of 2		

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 29

Asbestos Present: **NO**

Other - 100%

Cust. #: AE230757-013C

No Asbestos Observed

Material: Hard Plaster Wall, Rough Texture, Finish Coat

Location: 2nd Floor Mechanical Room

Appearance: white, nonfibrous, homogenous

Layer: 1 of 2

Lab ID #: 109041 - 29a

Asbestos Present: **NO**

Cellulose - 1%

Cust. #: AE230757-013C

No Asbestos Observed

Other - 99%

Material: Hard Plaster Wall, Rough Texture, Brown Coat

Location: 2nd Floor Mechanical Room

Appearance: grey, nonfibrous, homogenous

Layer: 2 of 2

Lab ID #: 109041 - 30

Asbestos Present: **NO**

Other - 100%

Cust. #: AE230757-014A

No Asbestos Observed

Material: Interior Door Caulk, White

Location: 2nd Floor Mechanical Room

Appearance: white, nonfibrous, homogenous

Layer: 1 of 1

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



NVLAP Lab Code 102118-0

APEX Research Inc., 7717 Kensington Ct., Brighton, MI 48116
(734) 449-9990, Fax (734) 449-9991

Page 14 of 45

Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 31 Cust. #: AE230757-014B Material: Interior Door Caulk, White Location: 2nd Floor Mechanical Room Appearance: white, nonfibrous, homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 32 Cust. #: AE230757-015A Material: HVAC Vibration Dampener, Black Location: 2nd Floor Mechanical Room Appearance: black, fibrous, nonhomogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Fiberglass - 30% Other - 70%
Lab ID #: 109041 - 33 Cust. #: AE230757-015B Material: HVAC Vibration Dampener, Black Location: 2nd Floor Mechanical Room Appearance: black, fibrous, nonhomogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Fiberglass - 30% Other - 70%

For Layered Samples, each component will be analyzed and reported separately.

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 34 Cust. #: AE230757-016A Material: Floor Tile, 12x12, Cream Mottled Location: Room 211 Appearance: white, nonfibrous, homogenous Layer: 1 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 34a Cust. #: AE230757-016A Material: Mastic Location: Room 211 Appearance: black, nonfibrous, homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Cellulose - 1% Other - 99%
Lab ID #: 109041 - 35 Cust. #: AE230757-016B Material: Floor Tile, 12x12, Cream Mottled Location: Room 202 Appearance: white, nonfibrous, homogenous Layer: 1 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 35a Cust. #: AE230757-016B Material: Mastic Location: Room 202 Appearance: black,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Cellulose - 1% Other - 99%
Lab ID #: 109041 - 36 Cust. #: AE230757-017A Material: Cove Base,4, Tan Location: Room 202 Appearance: brown,nonfibrous,homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 37 Cust. #: AE230757-017B Material: Cove Base,4, Tan Location: West Stairwell Appearance: brown,nonfibrous,homogenous Layer: 1 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



NVLAP Lab Code 102118-0

APEX Research Inc., 7717 Kensington Ct., Brighton, MI 48116
(734) 449-9990, Fax (734) 449-9991

Page 17 of 45

Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 37a Cust. #: AE230757-017B Material: Adhesive Location: West Stairwell Appearance: yellow,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 38 Cust. #: AE230757-018A Material: Floor Tile, 9x9, Tan w/ White Location: Office near 2nd Floor Boy's Restroom Appearance: brown,fibrous,homogenous Layer: 1 of 2	Asbestos Present: YES Chrysotile - 5%	Other - 95%
Lab ID #: 109041 - 38a Cust. #: AE230757-018A Material: Mastie Location: Office near 2nd Floor Boy's Restroom Appearance: black,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Cellulose - 1% Other - 99%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 39
Cust. #: AE230757-018B
Material: Floor Tile, 9x9, Tan w/ White
Location: Office near 2nd Floor Boy's Restroom
Appearance:
Layer: 1 of 2

Asbestos Present:

NOT ANALYZED

Lab ID #: 109041 - 39a
Cust. #: AE230757-018B
Material: Mastic
Location: Office near 2nd Floor Boy's Restroom
Appearance: black, nonfibrous, homogenous
Layer: 2 of 2

Asbestos Present: **NO**
No Asbestos Observed

Cellulose - 1%
Other - 99%

Lab ID #: 109041 - 40
Cust. #: AE230757-019A
Material: Hard Plaster Wall, Smooth, Finish Coat
Location: Room 209
Appearance: white, nonfibrous, homogenous
Layer: 1 of 2

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 40a
Cust. #: AE230757-019A
Material: Hard Plaster Wall, Smooth, Brown Coat
Location: Room 209
Appearance: grey,nonfibrous,homogenous
Layer: 2 of 2

Asbestos Present: **NO**
No Asbestos Observed

Cellulose - 1%
Other - 99%

Lab ID #: 109041 - 41
Cust. #: AE230757-019B
Material: Hard Plaster Wall, Smooth, Finish Coat
Location: Room 117
Appearance: white,nonfibrous,homogenous
Layer: 1 of 2

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #: 109041 - 41a
Cust. #: AE230757-019B
Material: Hard Plaster Wall, Smooth, Brown Coat
Location: Room 117
Appearance: grey,nonfibrous,homogenous
Layer: 2 of 2

Asbestos Present: **NO**
No Asbestos Observed

Cellulose - 1%
Other - 99%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 42
Cust. #: AE230757-019C
Material: Hard Plaster Wall, Smooth, Finish Coat
Location: Counseling Center Office A
Appearance: white, nonfibrous, homogenous
Layer: 1 of 2

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #: 109041 - 42a
Cust. #: AE230757-019C
Material: Hard Plaster Wall, Smooth, Brown Coat
Location: Counseling Center Office A
Appearance: grey, nonfibrous, homogenous
Layer: 2 of 2

Asbestos Present: **NO**
No Asbestos Observed

Cellulose - 1%
Other - 99%

Lab ID #: 109041 - 43
Cust. #: AE230757-019D
Material: Hard Plaster Wall, Smooth, Finish Coat
Location: Counseling Center Copy Room
Appearance: white, nonfibrous, homogenous
Layer: 1 of 2

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 43a Cust. #: AE230757-019D Material: Hard Plaster Wall, Smooth, Brown Coat Location: Counseling Center Copy Room Appearance: grey,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Cellulose - 1% Other - 99%
Lab ID #: 109041 - 44 Cust. #: AE230757-019E Material: Hard Plaster Wall, Smooth, Finish Coat Location: Main Office Appearance: white,nonfibrous,homogenous Layer: 1 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 44a Cust. #: AE230757-019E Material: Hard Plaster Wall, Smooth, Brown Coat Location: Main Office Appearance: grey,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Cellulose - 1% Other - 99%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 45
Cust. #: AE230757-020A
Material: Interior Window Caulk, Tan
Location: Room 206
Appearance: brown, fibrous, homogenous
Layer: 1 of 1

Asbestos Present: **YES**
Chrysotile - 2%

Other - 98%

Lab ID #: 109041 - 46
Cust. #: AE230757-020B
Material: Interior Window Caulk, Tan
Location: Ticket Booth
Appearance:
Layer: 1 of 1

Asbestos Present:

NOT ANALYZED

Lab ID #: 109041 - 47
Cust. #: AE230757-021A
Material: Interior Window Glaze, White
Location: Room 206
Appearance: white, nonfibrous, homogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 48 Cust. #: AE230757-021B Material: Interior Window Glaze, White Location: 2nd Floor West Hallway Appearance: white,nonfibrous,homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 49 Cust. #: AE230757-022A Material: Floor Tile, 12x12, Cream w/ Tan Location: Room 209A Appearance: beige,nonfibrous,homogenous Layer: 1 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 49a Cust. #: AE230757-022A Material: Mastic Location: Room 209A Appearance: black,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Cellulose - 1% Other - 99%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 50 Cust. #: AE230757-022B Material: Floor Tile, 12x12, Cream w/ Tan Location: Room 107 - Storage Appearance: beige,nonfibrous,homogenous Layer: 1 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 50a Cust. #: AE230757-022B Material: Mastic Location: Room 107 - Storage Appearance: black,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Cellulose - 1% Other - 99%
Lab ID #: 109041 - 51 Cust. #: AE230757-023A Material: Interior Door Window Glaze, White Location: East Stairwell Appearance: grey,nonfibrous,homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 52 Cust. #: AE230757-023B Material: Interior Door Window Glaze, White Location: West Stairwell Appearance: grey,nonfibrous,homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 53 Cust. #: AE230757-024A Material: Exterior Door Caulk, Interior Side, Grey Location: West Stairwell Appearance: grey,fibrous,nonhomogenous Layer: 1 of 1	Asbestos Present: YES Chrysotile - 5%	Other - 95%
Lab ID #: 109041 - 54 Cust. #: AE230757-024B Material: Exterior Door Caulk, Interior Side, Grey Location: Library Appearance: Layer: 1 of 1	Asbestos Present: NOT ANALYZED	

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 55 Cust. #: AE230757-025A Material: Floor Tile, 9x9, Tan w/ Grey Location: Ticket Booth Appearance: beige, fibrous, homogenous Layer: 1 of 2	Asbestos Present: YES Chrysotile - 5%	Other - 95%
Lab ID #: 109041 - 55a Cust. #: AE230757-025A Material: Mastic Location: Ticket Booth Appearance: black, nonfibrous, homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 56 Cust. #: AE230757-025B Material: Floor Tile, 9x9, Tan w/ Grey Location: Ticket Booth Appearance: Layer: 1 of 2	Asbestos Present: NOT ANALYZED	

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 56a
Cust. #: AE230757-025B
Material: Mastic
Location: Ticket Booth
Appearance: black,nonfibrous,homogenous
Layer: 2 of 2

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #: 109041 - 57
Cust. #: AE230757-026A
Material: Hard Plaster Ceiling, Rough Texture, Finish Coat
Location: Ticket Booth
Appearance: white,nonfibrous,homogenous
Layer: 1 of 2

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #: 109041 - 57a
Cust. #: AE230757-026A
Material: Hard Plaster Ceiling, Rough Texture, Brown Coat
Location: Ticket Booth
Appearance: grey,nonfibrous,homogenous
Layer: 2 of 2

Asbestos Present: **NO**
No Asbestos Observed

Cellulose - 1%
Other - 99%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 58

Asbestos Present: **NO**

Other - 100%

Cust. #: AE230757-026B

No Asbestos Observed

Material: Hard Plaster Ceiling, Rough Texture, Finish Coat

Location: Gymnasium Storage A

Appearance: white, nonfibrous, homogenous

Layer: 1 of 2

Lab ID #: 109041 - 58a

Asbestos Present: **NO**

Cellulose - 1%

Cust. #: AE230757-026B

No Asbestos Observed

Other - 99%

Material: Hard Plaster Ceiling, Rough Texture, Brown Coat

Location: Gymnasium Storage A

Appearance: grey, nonfibrous, homogenous

Layer: 2 of 2

Lab ID #: 109041 - 59

Asbestos Present: **NO**

Other - 100%

Cust. #: AE230757-026C

No Asbestos Observed

Material: Hard Plaster Ceiling, Rough Texture, Finish Coat

Location: Boy's Locker Room - Custodial Closet

Appearance: white, nonfibrous, homogenous

Layer: 1 of 2

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 59a

Asbestos Present: **NO**

Cellulose - 1%

Cust. #: AE230757-026C

No Asbestos Observed

Other - 99%

Material: Hard Plaster Ceiling, Rough Texture, Brown Coat

Location: Ticket Booth

Appearance: grey, nonfibrous, homogenous

Layer: 2 of 2

Lab ID #: 109041 - 60

Asbestos Present: **YES**

Other - 98%

Cust. #: AE230757-028A

Chrysotile - 2%

Material: Exterior Door Caulk, Interior Side, White

Location: Gymnasium

Appearance: white, fibrous, homogenous

Layer: 1 of 1

Lab ID #: 109041 - 61

Asbestos Present:

Cust. #: AE230757-028B

Material: Exterior Door Caulk, Interior Side, White

Location: Gymnasium

NOT ANALYZED

Appearance:

Layer: 1 of 1

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 62 Cust. #: AE230757-032A Material: Drywall Location: Varsity Appearance: white, fibrous, nonhomogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Cellulose - 20% Fiberglass - 5% Other - 75%
Lab ID #: 109041 - 63 Cust. #: AE230757-032B Material: Drywall Location: Counseling Center Copy Room Appearance: white, fibrous, nonhomogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Fiberglass - 5% Other - 95%
Lab ID #: 109041 - 64 Cust. #: AE230757-033A Material: Drywall Mud Location: Varsity Appearance: white, nonfibrous, homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 65 Cust. #: AE230757-033B Material: Drywall Mud Location: Counseling Center Copy Room Appearance: white, nonfibrous, homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 66 Cust. #: AE230757-034A Material: Drywall Tape/Paper Location: Varsity Appearance: brown, fibrous, nonhomogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Cellulose - 80% Other - 20%
Lab ID #: 109041 - 67 Cust. #: AE230757-034B Material: Drywall Tape/Paper Location: Counseling Center Copy Room Appearance: brown, fibrous, homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Cellulose - 80% Other - 20%

For Layered Samples, each component will be analyzed and reported separately.

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 68
Cust. #: AE230757-035A
Material: Lay-in Ceiling Tile, 2x2, Dots & Gouges
Location: Varsity
Appearance: white, fibrous, homogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Mineral Wool - 80%
Other - 20%

Lab ID #: 109041 - 69
Cust. #: AE230757-035B
Material: Lay-in Ceiling Tile, 2x2, Dots & Gouges
Location: Varsity
Appearance: white, fibrous, homogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Mineral Wool - 80%
Other - 20%

Lab ID #: 109041 - 70
Cust. #: AE230757-036A
Material: Sink Undercoating, Grey
Location: Varsity
Appearance: white, fibrous, homogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Cellulose - 10%
Other - 90%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 71 Cust. #: AE230757-036B Material: Sink Undercoating, Grey Location: Room 107 Appearance: white, fibrous, homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Cellulose - 10% Other - 90%
Lab ID #: 109041 - 72 Cust. #: AE230757-037A Material: Carpet Adhesive, Yellow Location: Varsity Appearance: yellow, nonfibrous, homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 73 Cust. #: AE230757-037B Material: Carpet Adhesive, Yellow Location: Room 107 Appearance: yellow, nonfibrous, homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 74
Cust. #: AE230757-038A
Material: Exterior Door Caulk, Interior Side, Tan
Location: Room 118
Appearance: beige, fibrous, homogenous
Layer: 1 of 1

Asbestos Present: **YES**
Chrysotile - 5%

Other - 95%

Lab ID #: 109041 - 75
Cust. #: AE230757-038B
Material: Exterior Door Caulk, Interior Side, Tan
Location: Art Hallway
Appearance:
Layer: 1 of 1

Asbestos Present:

NOT ANALYZED

Lab ID #: 109041 - 76
Cust. #: AE230757-039A
Material: Cove Base, 4, Grey
Location: Counseling Center
Appearance: grey, nonfibrous, homogenous
Layer: 1 of 2

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 76a Cust. #: AE230757-039A Material: Adhesive Location: Counseling Center Appearance: yellow,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 77 Cust. #: AE230757-039B Material: Cove Base, 4, Grey Location: Main Office Appearance: grey,nonfibrous,homogenous Layer: 1 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 77a Cust. #: AE230757-039B Material: Adhesive Location: Main Office Appearance: yellow,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 78
Cust. #: AE230757-040A
Material: Drywall Ceiling
Location: Counseling Center Restroom
Appearance: white, fibrous, nonhomogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Cellulose - 20%
Fiberglass - 1%
Other - 79%

Lab ID #: 109041 - 79
Cust. #: AE230757-040B
Material: Drywall Ceiling
Location: Main Office Restroom
Appearance: white, fibrous, nonhomogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Cellulose - 20%
Fiberglass - 1%
Other - 79%

Lab ID #: 109041 - 80
Cust. #: AE230757-041A
Material: Sink Undercoating, Black
Location: Room 110
Appearance: black, fibrous, homogenous
Layer: 1 of 1

Asbestos Present: **YES**
Chrysotile - 5%

Other - 95%

For Layered Samples, each component will be analyzed and reported separately.

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 81
Cust. #: AE230757-041B
Material: Sink Undercoating, Black
Location: Room 109
Appearance:
Layer: 1 of 1

Asbestos Present:

NOT ANALYZED

Lab ID #: 109041 - 82
Cust. #: AE230757-042A
Material: Cove Base, 4, Blue
Location: Room 110
Appearance: blue, nonfibrous, homogenous
Layer: 1 of 2

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #: 109041 - 82a
Cust. #: AE230757-042A
Material: Adhesive
Location: Room 110
Appearance: yellow, nonfibrous, homogenous
Layer: 2 of 2

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 83 Cust. #: AE230757-042B Material: Cove Base, 4, Blue Location: Room 110 Appearance: blue,nonfibrous,homogenous Layer: 1 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 83a Cust. #: AE230757-042B Material: Adhesive Location: Room 110 Appearance: yellow,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 84 Cust. #: AE230757-043A Material: Floor Tile, 12x12, White w/ Grey Location: Room 108 Appearance: white,nonfibrous,homogenous Layer: 1 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 84a Cust. #: AE230757-043A Material: Mastic Location: Room 108 Appearance: black,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Cellulose - 1% Other - 99%
Lab ID #: 109041 - 85 Cust. #: AE230757-043B Material: Floor Tile, 12x12, White w/ Grey Location: Room 108 Appearance: white,nonfibrous,homogenous Layer: 1 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 85a Cust. #: AE230757-043B Material: Mastic Location: Room 108 Appearance: black,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 86 Cust. #: AE230757-044A Material: Floor Tile, 12x12, Grey Mottled Location: Room 108 Office Appearance: grey,nonfibrous,homogenous Layer: 1 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 86a Cust. #: AE230757-044A Material: Mastic Location: Room 108 Office Appearance: black,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 87 Cust. #: AE230757-044B Material: Floor Tile, 12x12, Grey Mottled Location: Room 103 Appearance: grey,nonfibrous,homogenous Layer: 1 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 109041 - 87a Cust. #: AE230757-044B Material: Mastic Location: Room 103 Appearance: black,nonfibrous,homogenous Layer: 2 of 2	Asbestos Present: NO No Asbestos Observed	Other - 100%
Lab ID #: 109041 - 88 Cust. #: AE230757-045A Material: Lay-in Ceiling Tile, 2x2, Drywall Location: Room 118 Appearance: white,fibrous,nonhomogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Cellulose - 20% Fiberglass - 2% Other - 78%
Lab ID #: 109041 - 89 Cust. #: AE230757-045B Material: Lay-in Ceiling Tile, 2x2, Drywall Location: Kitchen Appearance: white,fibrous,nonhomogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Cellulose - 20% Fiberglass - 2% Other - 78%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 90
Cust. #: AE230757-046A
Material: Exterior Door Caulk, Exterior Side, Grey
Location: Exterior
Appearance: grey,nonfibrous,homogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #: 109041 - 91
Cust. #: AE230757-046B
Material: Exterior Door Caulk, Exterior Side, Grey
Location: Exterior
Appearance: grey,nonfibrous,homogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #: 109041 - 92
Cust. #: AE230757-047A
Material: Exterior Window Caulk, Exterior Side, Grey
Location: Exterior
Appearance: grey,nonfibrous,homogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 93
Cust. #: AE230757-047B
Material: Exterior Window Caulk, Exterior Side, Grey
Location: Exterior
Appearance: grey,nonfibrous,homogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #: 109041 - 94
Cust. #: AE230757-048A
Material: Exterior Vent Caulk, Grey
Location: Exterior
Appearance: grey,nonfibrous,homogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #: 109041 - 95
Cust. #: AE230757-048B
Material: Exterior Vent Caulk, Grey
Location: Exterior
Appearance: grey,nonfibrous,homogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



Certificate of Laboratory Analysis

Test Method, Polarized Light Microscopy (PLM)



Project: Thompson K-8
Project #: AE230757

Report To:

Ms. Tiffany Bell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-109041
Date Collected: 02/28/24
Date Received: 02/28/24
Date Analyzed: 02/29/24
Date Reported: 02/29/24

Sample Information**Asbestos Type/Percent****Non-Asbestos Material**

Lab ID #: 109041 - 96
Cust. #: AE230757-049A
Material: Exterior Wall Joint Caulk, White
Location: Exterior
Appearance: white, nonfibrous, homogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #: 109041 - 97
Cust. #: AE230757-049B
Material: Exterior Wall Joint Caulk, White
Location: Exterior
Appearance: white, nonfibrous, homogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #:
Cust. #:
Material:
Location:
Appearance:
Layer: of

Asbestos Present:

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.





APEX Research, Inc.

7717 Kensington Ct., Brighton, MI 48116 Phone: (734) 449 - 9990, Fax (734) 449 - 9991 www.ApexMI.com

Company: Arch Environmental Group
Customer Name: Arch Environmental Group
Address: 37720 Interchange Drive
City, St., Zip: Farmington Hills, Michigan 48335
Phone: (248) 426-0165 Fax: (248) 427-0305

Date of Survey: 2/28/24
Project Name: Thompson K-8
Project #: AE230757
Contact Person: Tiffany Fell
Email: labs@archenvgroup.com

Turn Around Time: (circle one) 24 Hour Terms and conditions on the other side.

Same Day

48 Hour

Other: _____

Same Day cut off: 3pm

Day Lead cut off: 10:30am

Same

24 Hour

3-5 Day

TTP yes / no

(Test Till Positive)

Circle analyses required, indicate type and quantity

Asbestos: Bulk ☒ Air _____ Other _____ Point Count _____

Lead / Cad / Chrome: Paint _____ Air _____ Wipe ASTM E1792? circle YES or NO

Mold: Bulk _____ Air _____ Tape _____ Other _____

Smoke/Soot/Char: Bulk _____ Wipe _____ Tape _____ Other _____

Lab ID	Customer ID #	Material/Location	Volume	Area	Results
AE230757 - 001A		Floor Tile, 12x12, Blue Mottled & Mastic		Room 215	
	001B	"		Room 214	
	002A	Layin Ceiling Tile, 2x2, Textured		Room 210	
	002B	"		Room 109	
	003A	Ex. Window Caulk, Int. Side, Grey		Room 202	
	003B	"		Room 116	
	004A	Ex. Window Glaze, Int. Side, Grey		Room 202	
	004B	"		Room 116	
	005A	Covebase, 4, Black & Adhesive		Room 214	
	005B	"		Room 111	
	007A	Int. Door Caulk, Tan		Room 211	
	007B	"		Room 203	
	008A	Int. Door Window Glaze, Grey		Room 211	
	008B	"		Room 203	
	009A	Lab Sink		Room 215	

Relinquished By: [Signature] Received By: [Signature]
Date: 2/28/24 Time/Date: 1424 FEB 28 2024

Relinquished By: _____ Received By: _____
Date: _____ Time/Date: _____



APEX Research, Inc.

7717 Kensington Ct., Brighton, MI 48116 Phone: (734) 449 - 9990, Fax (734) 449 - 9991 www.ApexMI.com

Company: Arch Environmental Group
 Customer Name: Arch Environmental Group
 Address: 37720 Interchange Drive
 City, St., Zip: Farmington Hills, Michigan 48335
 Phone: (248) 426-0165 Fax: (248) 427-0305

Date of Survey: 2/28/24
 Project Name: Thompson K-8
 Project #: AE230757
 Contact Person: Tiffany Feil
 Email: labs@archenvgroup.com

Turn Around Time: (circle one) ***Terms and conditions on the other side.

Same Day

24 Hour

48 Hour

3-5 Day

Other: _____

TTP yes / no

Same Day cut off: 3pm

Same

(Test Till Positive)

Day Lead cut off: 10:30am

Circle analyses required, indicate type and quantity

Asbestos: Bulk ☒ Air _____ Other _____ Point Count _____

Lead / Cad / Chrome: Paint _____ Air _____ Wipe ASTM E1792? circle YES or NO

Mold: Bulk _____ Air _____ Tape _____ Other _____

Smoke/Soot/Char: Bulk _____ Wipe _____ Tape _____ Other _____

Lab ID	Customer ID #	Material/Location	Volume	Area	Results
AE230757-009B		Lab Sink		Room 214	
	010A	Straight Pipe Insulation, Can't wrap		2nd Floor Custodial Closet	
	010B	"		Varsity	
	010C	"		"	
	011A	Duct Sealant, Grey		2nd Floor Custodial Closet	
	011B	"		Boys Locker Room - Mezzanine	
	012A	Hard Plaster Ceiling, Smooth, Finished	Brown coat	2nd Floor Custodial Closet	
	012B	"		2nd Floor Girls Restroom	
	012C	"		Kitchen Hallway - Dry Storage	
	012D	"		Kitchen - Office	
	012E	"		Stage Storage	
	013A	Hard Plaster Wall, Rough Texture, Finished	Brown coat	2nd Floor Mechanical Room	
	013B	"		"	
	013C	"		"	
	014A	Int. Door Core	CREATED White	2nd Floor Mechanical Room	

Relinquished By: Tiffany FeilReceived By: G. White

Relinquished By: _____

Received By: _____

Date: 2/28/24Time/Date: 1424

FEB 28 2024

Date: _____

Time/Date: _____



APEX Research, Inc.

7717 Kensington Ct., Brighton, MI 48116 Phone: (734) 449 - 9990, Fax (734) 449 - 9991 www.ApexMI.com

Company: Arch Environmental Group
Customer Name: Arch Environmental Group
Address: 37720 Interchange Drive
City, St., Zip: Farmington Hills, Michigan 48335
Phone: (248) 426-0165 Fax: (248) 427-0305

Date of Survey: 2/28/24
Project Name: Thompson K-8
Project #: AE230757
Contact Person: Tiffany Fell
Email: labs@archenvgroup.com

Turn Around Time: (circle one) ***Terms and conditions on the other side.

Same Day 24 Hour
48 Hour 3-5 Day
Other: _____ TTP yes / no
Same Day cut off: 3pm Same (Test Till Positive)
Day Lead cut off: 10:30am

Circle analyses required, indicate type and quantity

Asbestos: Bulk ✓ Air _____ Other _____ Point Count _____
Lead / Cad / Chrome: Paint _____ Air _____ Wipe ASTM E1792? circle YES or NO
Mold: Bulk _____ Air _____ Tape _____ Other _____
Smoke/Soot/Char: Bulk _____ Wipe _____ Tape _____ Other _____

Lab ID	Customer ID #	Material/Location	Volume	Area	Results
AE230757-0141B		Int. Door Caulk, White		2nd Floor Mechanical Room	
	015A	AVAC Vibration Damper, Black		2nd Floor Mechanical Room	
	015B			Boys Locker Room - mezzanine	
	016A	Floor Tile, 12X12, Cream Mottled & Mastic		Room 211	
	016B	"		Room 202	
	017A	Covebase, 4, Tan & Adhesive		Room 202	
	017B	"		West Stairwell	
	018A	Floor Tile, 9x9, Tan w/white & Mastic		Office near 2nd Floor Boys Restroom	
	018B	"		Room 109	
	019A	Hard Plaster Wall, Smooth, Finish coat / Brown coat		Room 209	
	019B	"		Room 117	
	019C	"		Counseling Center Office A	
	019D	"		Counseling Center Copy Room	
	019E	RECEIVED		main office	
	020A	Int. Windows Caulk, Tan		Room 206	

Relinquished By: Tiffany Fell Received By: _____
Date: 2/28/24 Time/Date: 12/24 APEX RESEARCH

Relinquished By: _____ Received By: _____
Date: _____ Time/Date: _____



APEX Research, Inc.

7717 Kensington Ct., Brighton, MI 48116 Phone: (734) 449 - 9990, Fax (734) 449 - 9991 www.ApexMI.com

Company: Arch Environmental Group
 Customer Name: Arch Environmental Group
 Address: 37720 Interchange Drive
 City, St., Zip: Farmington Hills, Michigan 48335
 Phone: (248) 426-0165 Fax: (248) 427-0305

Date of Survey: 2/28/24
 Project Name: Thompson K-8
 Project #: AE230757
 Contact Person: Tiffany Felt
 Email: labs@archenvgroup.com

Turn Around Time: (circle one) ***Terms and conditions on the other side.

Same Day

24 Hour

48 Hour

3-5 Day

Other: _____

TTP yes / no

Same Day cut off: 3pm

Same (Test Till Positive)

Day Lead cut off: 10:30am

Circle analyses required, indicate type and quantity

Asbestos: Bulk ☒ Air _____ Other _____ Point Count _____

Lead / Cad / Chrome: Paint _____ Air _____ Wipe ASTM E1792? circle YES or NO

Mold: Bulk _____ Air _____ Tape _____ Other _____

Smoke/Soot/Char: Bulk _____ Wipe _____ Tape _____ Other _____

Lab ID	Customer ID #	Material/Location	Volume	Area	Results
AE230757-020B		Int. Window Caulk, Tan		Ticket Booth	
	021A	Int. Windows Glaze, White		Room 206	
	021B	"		2nd Floor West Hallway	
	022A	Floor Tile, 12x12, Cream w/Tan		Room 209A	
	022B	"		Room 107-Storage	
	023A	Int. Door Windows Glaze, White		East Stairwell	
	023B	"		West Stairwell	
	024A	Ext. Door Caulk, Int. Side, Grey		West Stairwell	
	024B	"		Library	
	025A	Floor Tile, 9x9, Tan w/Grey		Ticket Booth	
	025B	"		"	
	026A	Hard Plaster Ceiling, Rough texture, Finish coat/Brown coat		Ticket Booth	
	026B	"		Gymnasium Storage A	
	026C	"		Boys Locker Room-Custodial Closet	
	028A	Ex. Door Caulk, Int. Side, White		Gymnasium	

Relinquished By: Tiffany FeltReceived By: Whitney

Relinquished By: _____

Received By: _____

Date: 2/28/24Time/Date: 1424

Date: _____

Time/Date: _____



APEX Research, Inc.

7717 Kensington Ct., Brighton, MI 48116 Phone: (734) 449 - 9990, Fax (734) 449 - 9991 www.ApexMI.com

Company: Arch Environmental Group
 Customer Name: Arch Environmental Group
 Address: 37720 Interchange Drive
 City, St., Zip: Farmington Hills, Michigan 48335
 Phone: (248) 426-0165 Fax: (248) 427-0305

Date of Survey: 2/28/24
 Project Name: Thompson K-8
 Project #: AE230757
 Contact Person: Tiffany Fell
 Email: labs@archenvgroup.com

Turn Around Time: (circle one) 24 Hour Terms and conditions on the other side.

Same Day

48 Hour

Other: _____

Same Day cut off: 3pm

Day Lead cut off: 10:30am

Same

24 Hour

3-5 Day

TTP yes ☒ no

(Test Till Positive)

Circle analyses required, indicate type and quantity

Asbestos: Bulk ☒ Air _____ Other _____ Point Count _____

Lead / Cad / Chrome: Paint _____ Air _____ Wipe ASTM E1792? circle YES or NO

Mold: Bulk _____ Air _____ Tape _____ Other _____

Smoke/Soot/Char: Bulk _____ Wipe _____ Tape _____ Other _____

Lab ID	Customer ID #	Material/Location	Volume	Area	Results
AE230757-028B		Ex. Door Caulk, Int Side, White		Gummsium	
	032A	Drywall		Varsity	
	032B	"		Counseling Center	Copy Room
	033A	Drywall med,		Varsity	
	033B	"		Counseling Center	Copy Room
	034A	Drywall Tape		Varsity	
	034B	"		Counseling Center	Copy Room
	035A	Acrylic Ceiling Tile, 2x2 Dots & Grooves		Varsity	
	035B	"		"	"
	036A	Sink Undercoating, Grey		Varsity	
	036B	"		Room	98
	037A	Carpet Adhesive, Yellow		Varsity	
	037B	"		Room	107
	038A	Ex. Door Caulk, Int. Side, Tan		Room	118
	038B	"		AVA Hallway	

Relinquished By: Tiffany FellDate: 2/28/24Received By: cutTime/Date: 1/24

Relinquished By: _____

Date: _____

Received By: _____

Time/Date: _____

APEX RESEARCH



APEX Research, Inc.

7717 Kensington Ct., Brighton, MI 48116 Phone: (734) 449 - 9990, Fax (734) 449 - 9991 www.ApexMI.com

Company: Arch Environmental Group
 Customer Name: Arch Environmental Group
 Address: 37720 Interchange Drive
 City, St., Zip: Farmington Hills, Michigan 48335
 Phone: (248) 426-0165 Fax: (248) 427-0305

Date of Survey: 2/28/24
 Project Name: Thompson K-8
 Project #: AE230757
 Contact Person: Tiffany Feil
 Email: labs@archenvgroup.com

Turn Around Time: (circle one) ***Terms and conditions on the other side.

Same Day

24 Hour

48 Hour

3-5 Day

Other: _____

TTP yes / no

Same Day cut off: 3pm

Same

(Test Till Positive)

Day Lead cut off: 10:30am

Circle analyses required, indicate type and quantity

Asbestos: Bulk ☒ Air _____ Other _____ Point Count _____

Lead / Cad / Chrome: Paint _____ Air _____ Wipe ASTM E1792? circle YES or NO

Mold: Bulk _____ Air _____ Tape _____ Other _____

Smoke/Soot/Char: Bulk _____ Wipe _____ Tape _____ Other _____

Lab ID	Customer ID #	Material/Location	Volume	Area	Results
AE230757-	039A	Covebase, 4 Grey & Adhesive		Counseling Center	
	039B	"		Main Office	
	040A	Drywall Ceiling		Counseling Center Restroom	
	040B	"		Main Office Restroom	
	041A	Sink Undercoating, Black		Room 110	
	041B	"		Room 109	
	042A	Covebase, 4 Blue & Adhesive		Room 110	
	042B	"		Room 109	
	043A	Floor Tile, 12X12, White w/Grey & Mastic		Room 108	
	043B	"		"	
	044A	Floor Tile, 12x12, Grey Mottled & Mastic		Room 108-Office	
	044B	"		Room 103	
	045A	Lay-in Ceiling Tile, 2X2, Drywall		Room 118	
	045B	"		Kitchen	
	046A	Ex. Door Cawlk Ex Side, Grey		Exterior	

Relinquished By: Tiffany Feil Received By: ALC 2/28/2024Date: 2/28/24 Time/Date: 1424

Relinquished By: _____ Received By: _____

Date: _____ Time/Date: _____

APEX RESEARCH



7717 Kensington Ct., Brighton, MI 48116 Phone: (734) 449 - 9990, Fax (734) 449 - 9991 www.ApexMI.com

Date of Survey: 2/28/24
Project Name: Thompson K-8
Project #: AE230757
Contact Person: Tiffany Felt
Email: labs@archenvgroup.com

Turn Around Time: (circle one)***Terms and conditions on the other side.

Circle analyses required, indicate type and quantity

24 Hour

3-5 Day

TTP yes / no

Name (Test Till Positive)

(Test Till Positive)

Asbestos: Bulk ☒ Air ☐ Other ☐ Point Count ☐

Lead / Cad / Chrome: Paint Air Wipe ASTM E1792? circle YES or NO

Mold:	Bulk	Air	Tape	Other
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				
41				
42				
43				
44				
45				
46				
47				
48				
49				
50				
51				
52				
53				
54				
55				
56				
57				
58				
59				
60				
61				
62				
63				
64				
65				
66				
67				
68				
69				
70				
71				
72				
73				
74				
75				
76				
77				
78				
79				
80				
81				
82				
83				
84				
85				
86				
87				
88				
89				
90				
91				
92				
93				
94				
95				
96				
97				
98				
99				
100				

Smoke/Soot/Char:	Bulk	Wipe	Tape	Other
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				
41				
42				
43				
44				
45				
46				
47				
48				
49				
50				
51				
52				
53				
54				
55				
56				
57				
58				
59				
60				
61				
62				
63				
64				
65				
66				
67				
68				
69				
70				
71				
72				
73				
74				
75				
76				
77				
78				
79				
80				
81				
82				
83				
84				
85				
86				
87				
88				
89				
90				
91				
92				
93				
94				
95				
96				
97				
98				
99				
100				

RECEIVED

Relinquished By: _____ Received By: _____

Date: _____ Time/Date: _____

Certificate of Laboratory Analysis
Test Method, Polarized Light Microscopy (PLM)
Project: Thompson Middle School
Project #: AE230759



Report To:

Ms. Tiffany Fell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-111574
Date Collected: 06/24/24
Date Received: 06/24/24
Date Analyzed: 06/24/24
Date Reported: 06/25/24

Sample Information	Asbestos Type/Percent	Non-Asbestos Material
Lab ID #: 111574 - 01 Cust. #: AE230759-001A Material: Exterior Pebble Fascia Location: Exterior - Main Office Appearance: grey,nonfibrous,homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Cellulose - 1% Other - 99%
Lab ID #: 111574 - 02 Cust. #: AE230759-001B Material: Exterior Pebble Fascia Location: Exterior - Receiving Appearance: grey,nonfibrous,homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Cellulose - 1% Other - 99%
Lab ID #: 111574 - 03 Cust. #: AE230759-002A Material: Exterior Overhang Location: Exterior - Main Office Appearance: grey,nonfibrous,homogenous Layer: 1 of 1	Asbestos Present: NO No Asbestos Observed	Cellulose - 1% Other - 99%

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert T. Letarte Jr.".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



NVLAP Lab Code 102118-0

APEX Research Inc., 7717 Kensington Ct., Brighton, MI 48116
(734) 449-9990, Fax (734) 449-9991

Certificate of Laboratory Analysis
Test Method, Polarized Light Microscopy (PLM)
Project: Thompson Middle School
Project #: AE230759



Report To:

Ms. Tiffany Fell
Arch Environmental Group
37720 Interchange Drive
Farmington Hills, MI 48335

ARI Report # 24-111574
Date Collected: 06/24/24
Date Received: 06/24/24
Date Analyzed: 06/24/24
Date Reported: 06/25/24

Sample Information

Asbestos Type/Percent

Non-Asbestos Material

Lab ID #: 111574 - 04
Cust. #: AE230759-002B
Material: Exterior Overhang
Location: Exterior - Receiving
Appearance: grey, nonfibrous, homogenous
Layer: 1 of 1

Asbestos Present: **NO**
No Asbestos Observed

Other - 100%

Lab ID #:
Cust. #:
Material:
Location:
Appearance:
Layer: of

Asbestos Present:

Lab ID #:
Cust. #:
Material:
Location:
Appearance:
Layer: of

Asbestos Present:

For Layered Samples, each component will be analyzed and reported separately.

A handwritten signature in black ink, appearing to read "Robert Letarte".

Robert T. Letarte Jr., Laboratory Director

Test Method EPA 40 CFR - Part 763 and/or EPA 600/R-93/116 was used to analyze the above samples. Matrix interference and/or resolution limits may yield false/negative results in certain circumstances. Suspect floor tiles containing <1% should be tested with SEM or TEM. This certificate of analysis relates only to the samples as submitted and to insure the integrity of the results, may only be reproduced in full. This certificate must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Liability limited to cost of analysis.



NVLAP Lab Code 102118-0

APEX Research Inc., 7717 Kensington Ct., Brighton, MI 48116
(734) 449-9990, Fax (734) 449-9991

Time/Date:

APPENDIX E

Inspector Credentials

INSPECTOR CREDENTIALS

This appendix provides information regarding the Accredited Asbestos Inspector(s) who inspected the suspect asbestos-containing materials and collected asbestos bulk samples:

Date of Inspection: February 13 – 28, 2024
Building Name and Address: Thompson K-8 International Academy
16300 Lincoln Drive
Southfield, Michigan, 48076

Name of Accredited Inspector: Ms. Tiffany Fell
State of Accreditation: Michigan
Accreditation Number: A46672
State Accreditation Expiration Date: October 21, 2024
Training Institute: Arch Environmental Group, Inc.
Training Certificate Expiration Date: May 25, 2024

Signature of Accredited Inspector:  _____

Name of Accredited Inspector: Mr. Jordan Spratt
State of Accreditation: Michigan
Accreditation Number: A61912
State Accreditation Expiration Date: October 18, 2024
Training Institute: Arch Environmental Group, Inc.
Training Certificate Expiration Date: September 8, 2024

Signature of Accredited Inspector:  _____


Copies of current State of Michigan Accreditation Cards and training certificates are located on the following pages.

Tiffany Fell

Accredited Asbestos Inspector

State: Michigan
Accreditation Number: A46672
Accreditation Expiration Date: October 21, 2024
Training Provider: Arch Environmental Group
Training Expiration Date: May 9, 2025

Signature: _____

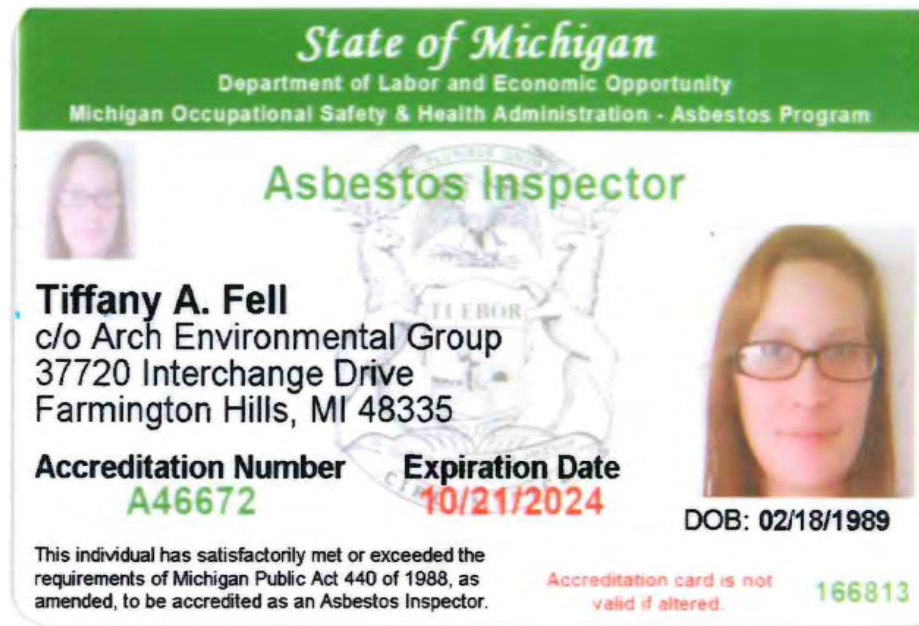

Certificate of Achievement

This certifies that

TIFFANY FELL

#xxx-xx-8678

has completed Arch Environmental Group, Inc.'s
**ASBESTOS INSPECTOR
REFRESHER COURSE**

Fulfills requirements under TSCA Title II

Compliant with 40 CFR 763 and Michigan Public Act 440 of 1988 as amended

Course Location: AEG Corporate Office

Course Date: May 9, 2024

Expiration Date: May 9, 2025

Certificate No. 24114



Roosevelt Austin III, Course Trainer



37720 Interchange Drive
Farmington Hills, MI 48335
(248) 426-0165 ph / (248) 427-0305 fx
www.archenvgroup.com

Jordan Spratt

Accredited Asbestos Inspector

State: Michigan
Accreditation Number: A61912
Accreditation Expiration Date: October 18, 2024
Training Provider: Arch Environmental Group
Training Expiration Date: May 9, 2025



Signature: _____



Certificate of Achievement

This certifies that

JORDAN SPRATT

#xxx-xx-3833

has completed Arch Environmental Group, Inc.'s
**ASBESTOS INSPECTOR
REFRESHER COURSE**

Fulfills requirements under TSCA Title II

Compliant with 40 CFR 763 and Michigan Public Act 440 of 1988 as amended

Course Location: AEG Corporate Office

Course Date: May 9, 2024

Expiration Date: May 9, 2025

Certificate No. 24105



Roosevelt Austin III, Course Trainer



37720 Interchange Drive
Farmington Hills, MI 48335
(248) 426-0165 ph / (248) 427-0305 fx
www.archenvgroup.com

END OF ADDENDUM