

FOR REF ONLY. ALL ROOMS TO BE V.I.F. BY DESIGNER.

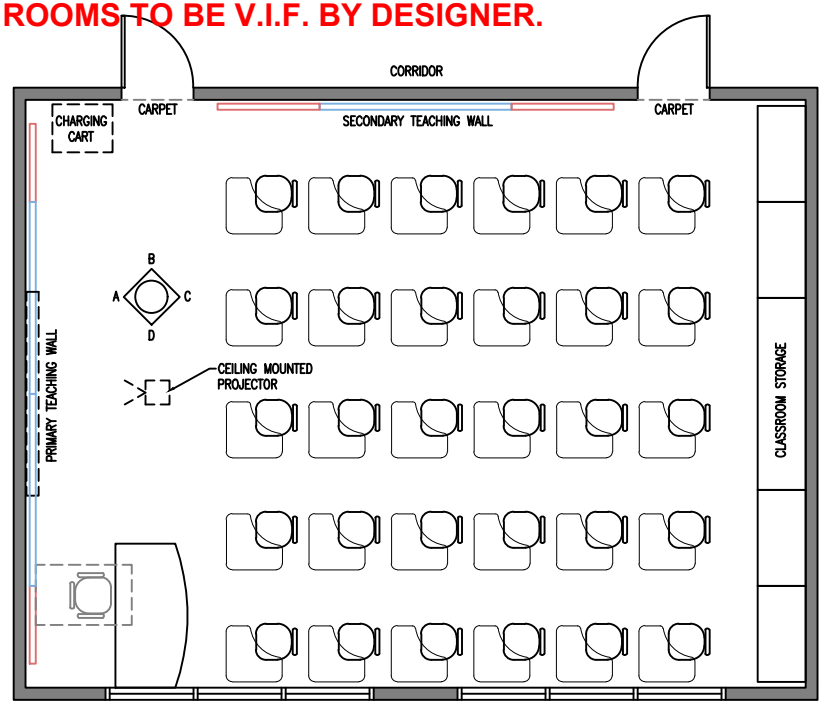


MIDDLE SCHOOL CLASSROOM (6TH–8TH GRADE)


TACKBOARD
MARKERBOARD

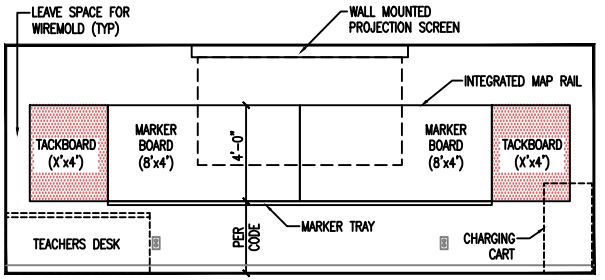


ELEVATION A – PRIMARY (PROJECTION) TEACHING WALL

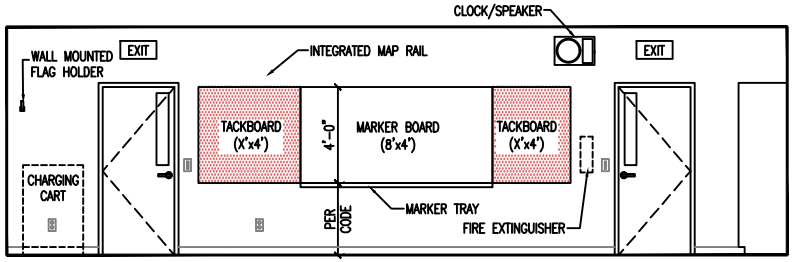

ELEVATION B – SECONDARY (SUPPLEMENTAL) TEACHING WALL

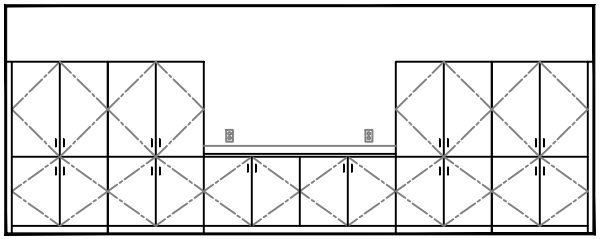

ELEVATION C – STORAGE WALL

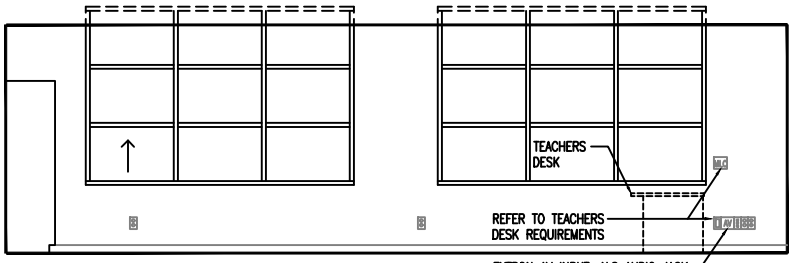

ELEVATION D – WINDOW WALL

FINISHES

1. Flooring at dry area is carpet
2. Flooring at wet area is resilient flooring
3. 4"- rubber base throughout
4. Integrated walk-off mat at exterior entry doors
5. Ceiling is suspended 2'x4' acoustic tile
6. Walls to have semi-gloss paint
7. Plastic laminate casework

MECHANICAL

1. Heating, ventilation and air conditioning

ELECTRICAL / DATA

1. Teachers desk -- refer to 'Teacher's Desk AV, Power, & Data Requirements'
2. Dedicated power for Chromebook carts
3. Duplex power receptacle; up to 2 per wall, including existing
4. Duplex data receptacle required at Extron input location
5. Light controls at entry doors
6. LED lighting
7. Surface mounted wiremold running from ceiling to floor to be located in corners of room
8. For all electrical requirements, verify and coordinate with existing conditions. Show all existing electrical and data on floor plans

ROOM FEATURES

1. Classroom doors with vision lite
2. Aluminum windows with Low-E glazing
3. Roller shades for windows/doors
4. Teaching walls (primary and secondary) incorporate fixed marker boards and tack boards
5. Wall mounted projection screen to be centered on 'Primary' teaching wall above marker board
6. Modular casework/furniture for classroom located in back of room. Coordinate with existing
7. Teachers desk (30"x72" bowed front)
8. Moveable student desks and chairs
9. Wall mounted flag holder. Flag holder is to be independent from marker board
10. Wall hung Fire Extinguisher (5 lb)

TECHNOLOGY

1. Wall mounted Intercom/clock-bell System (ICS) to be located on 'Secondary' teaching wall.
2. Ceiling mounted projector to be aligned with projection screen
3. A/V speakers flush mounted in ceiling.
4. Wireless Access Point (WAP) to be located in center of room; preferably ceiling mounted.
5. Intrusion Detection motion sensors to be located as necessary
6. Phones placed on teachers desk.
7. Chromebook charging carts
8. Extron system (control and inputs) to be integrated with classroom audio visual components. Extron system to be located at teacher desk. Input to include a 3.5 mm audio out jack to support Assistive Listening Systems (ALS).