ASBESTOS ABATEMENT PROTOCOL
Roofing Project
Cabrillo Middle School
1426 East Santa Clara Street, Ventura, CA 93003
Ventura Unified School District

The following protocol is for the safe removal of the roofing system at Cabrillo Middle School. Following an Asbestos Survey of the roofing materials by Environmental Testing Associates, the following materials contain varying amounts of regulated asbestos:

Administration Building:

Roofing Materials
Roofing Material Associated Mastics

The full survey is attached to this document and should be referenced during the bidding process. All square footage referenced within the survey are estimates and should not be relied upon for bid purpose, disposal quantities, or Ventura County Air Pollution Control District VCAPCD notifications, if required. The removal of asbestos containing roofing materials must follow all Federal, State and Local regulations.

Federal requirements which govern aspects of asbestos abatement include, but are not limited to, the following regulations.

California Code of Regulations (CCR)

1. CCR-Title 8 Section 1529- General Construction Asbestos
2. CCR-Title 8 Section 5208- Permits
3. CCR-Title 8 Section 641.6-341.14 Registration

Occupational Safety and Health Administration (OSHA)

1. Title 29 CFR 1926.1101 - Construction Standard for Asbestos
2. Title 29 CFR 1910.132 - Personal Protective Equipment
3. Title 29 CFR 1910.134 - Respiratory Protection
4. Title 29 CFR 1926 - Construction Industry Standards
5. Title 29 CFR 1910.20 - Access to Employee Exposure and Medical Records
6. Title 29 CFR 1910.1200 - Hazard Communication
7. Title 29 CFR 1910.151 - Medical and First Aid

Environmental Protection Agency **(EPA)**

1. 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.
2. 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)

Department of Transportation **(DOT)**

1. Title 49 CFR 100 - 185 – Transportation
2. CCR Title 22- Transportation

The Asbestos Abatement Contractor shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the asbestos abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment (PPE) including respiratory protection including respirator fit testing, as required by applicable Federal, State and Local regulations. The Contractor shall hold the Ventura Unified School District (VUSD) and Environmental Testing Associates (ETA) harmless for any Contractor's failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of the abatement contractor, the abatement contractor's employees, or the abatement contractor's subcontractors. The Contractor will incur all costs, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements related to failure to comply with the regulations applicable to the work.

The purpose of this document is to ensure that the abatement contractor follows the mandatory work practices listed below:

1. Roof level heating and ventilation air intake sources shall be isolated, or the ventilation system shall be shut down.

2. Roofing material shall be removed in an intact state to the extent feasible. Wet methods shall be used to remove roofing materials that are not intact, or that will be rendered not intact during removal, unless such wet methods are not feasible or will create safety hazards.

3. If cutting machines are used, they shall be continuously misted during use, unless a competent person determines that misting substantially decreases worker safety.(Use of mechanical means will require VCAPCD notification).

4. If a power roof cutter is utilized, all dust resulting from the cutting operation shall be collected by a HEPA dust collector or shall be HEPA vacuumed by vacuuming along the cut line by gently sweeping and then carefully and completely wiping up the still-wet dust and

debris left along the cut line. The dust and debris shall be immediately bagged or placed in covered containers.

5. Asbestos-containing material that has been removed from a roof shall not be dropped or thrown to the ground, unless the material is carried or passed to the ground by hand, it shall he lowered to the ground via covered, dust-tight chute, or hoist:

a. Any ACM that is not intact shall be lowered to the ground as soon as is practicable, but in any event no later than the end of the work shift. While the material remains on the roof it shall either be kept wet, placed in an impermeable waste bag, or wrapped in plastic sheeting.

b. Intact ACM shall be lowered to the ground as soon as is practicable, but in any event no later than the end of the work shift.

6. Upon being lowered, unwrapped material shall be transferred to a closed receptacle in such a manner as to preclude the dispersion of dust.


7. Removal or repair of sections of intact roofing less than 25 square feet in area does not require use of wet methods or HEPA vacuuming as long as manual methods, which do not render the material nonintact are used to remove the material and no visible dust is created by the removal method used. In determining whether the area involves less than 25 square feet, the employer shall include all removal and repair work performed on the same roof on the same day.

ETA is anticipating the abatement process to be completed in five (5) business days. The abatement contractor must staff appropriately to perform the abatement. Any costs associated with the failure to complete the abatement within five (5) days will be the financial responsibility of the abatement contractor for the consultant's fees and additional services as required.

A sight walk will be conducted during the bidding process. The Ventura Unified School District and Environmental Testing Associates will be onsite to help facilitate the bidding process and will assist in answering the contractors' questions.

Yours very truly,

ENVIRONMENTAL TESTING ASSOCIATES,



_____

Kevin R. Riley, Certified Asbestos Consultant (17-5871)
NIOSH 582 Certification # 120400LA-06
NV-IJPM-1674

May 30, 2024

Cabrillo Middle School
c/o Ventura Unified School District
ATTN: Ray Richards, Bond Construction Project Manager
255 W. Stanley Avenue
Ventura, CA 93003
Via Email: Ray.Richards@venturausd.org

LIMITED ASBESTOS SURVEY: 1426 East Santa Clara Street, Ventura, CA 93003

Dear Ray Richards,

Environmental Testing Associates (ETA) conducted bulk sampling of suspect asbestos containing materials (ACM) at the above referenced commercial building structure. The samples were delivered under proper chain of custody to an accredited laboratory for analysis. The objective of the investigation was to determine the possible presence of asbestos within the building materials identified below which may be disturbed during remediation activities. No fire-related or structural damage was observed during this investigation.

1.0 SAMPLING FOR ASBESTOS AND PLM ANALYSIS RESULTS

ETA representative Mr. Kevin Riley, CAC 17-5871, NV-IJPM-1674 conducted the sampling activities. Mr. Riley is a State of California–DOSH-Certified Asbestos Consultant.

Sampling of suspect-ACM was conducted on May 9, 2024, following the provisions of 40 CFR Part 763-86. ETA collected 39 bulk samples and delivered them to LA Testing Laboratory, an accredited laboratory located at 520 Mission Street, South Pasadena, California 91030 (800) 303-0047. (NVLAP # 200232-0). Due to multiple layers a total of 151 samples were analyzed by the laboratory.

Analysis of suspect ACM samples for asbestos was performed per Appendix A, Subpart F, 40 CFR Part 763, Section 1, Polarized Light Microscopy, by LA Testing which is accredited by the National Voluntary Laboratory Accreditation Program for asbestos analysis of bulk samples using polarized light microscopy.

Table 1.1 – Summary of Bulk Sampling for Asbestos (Collected: 05/09/2024)

Based on the analytical results (above) 1% or greater of **asbestos was detected** in the samples collected as listed in the locations as shown below. The removal of these materials tested is regulated as ACM in the State of California.

Sample ID No.	Sample Description	Asbestos Mineral Type & Percent
A-1 Shingle 1	Roofing Materials 20 WG (East) Gray/Black/Green, Fibrous, Heterogeneous	No Asbestos Detected

A-1a Shingle 2	Roofing Materials 20 WG (East) Black, Fibrous, Heterogeneous	No Asbestos Detected
A-2 Shingle 1	Roofing Materials 20 WG (East) Gray/Black/Green, Fibrous, Heterogeneous	No Asbestos Detected
A-2a Shingle 2	Roofing Materials 20 WG (East) Black, Fibrous, Heterogeneous	No Asbestos Detected
A-3 Shingle 1	Roofing Materials 20 WG (East) Gray/Black/Yellow, Fibrous, Heterogeneous	No Asbestos Detected
A-3a Shingle 2	Roofing Materials 20 WG (East) Black, Non-Fibrous, Homogeneous	No Asbestos Detected
A-3b Adhesive Like	Roofing Materials 20 WG (East) Brown/Black/Beige, Non-Fibrous, Homogeneous	No Asbestos Detected
A-4 Mastic	Roofing Materials 20 WG (East) Gray/Black, Non-Fibrous, Homogeneous	No Asbestos Detected
A-4a Shingle 1	Roofing Materials 20 WG (East) Black, Non-Fibrous, Homogeneous	No Asbestos Detected
A-4b Adhesive Like	Roofing Materials 20 WG (East) Brown/Black/Beige, Non-Fibrous, Homogeneous	No Asbestos Detected
A-4c Shingle 2	Roofing Materials 20 WG (East) Black, Fibrous, Heterogeneous	No Asbestos Detected

A-5 Mastic	Roofing Materials 20 WG (East) Gray/Black, Non-Fibrous, Homogeneous	No Asbestos Detected
A-5a Shingle 1	Roofing Materials 20 WG (East) Gray/Black, Fibrous, Heterogeneous	No Asbestos Detected
A-5b Adhesive Like	Roofing Materials 20 WG (East) Brown/Black/Beige, Non-Fibrous, Homogeneous	No Asbestos Detected
A-5c Shingle 2	Roofing Materials 20 WG (East) Black, Fibrous, Heterogeneous	No Asbestos Detected
A-6 Shingle 1	Roofing Materials 30 WG (East) Gray/Black/Green, Fibrous, Heterogeneous	No Asbestos Detected
A-6a Shingle 2	Roofing Materials 30 WG (East) Gray/Black, Fibrous, Heterogeneous	No Asbestos Detected
A-7 Shingle 1	Roofing Materials 30 WG (East) Gray/Black/Green, Fibrous, Heterogeneous	No Asbestos Detected
A-7a Shingle 2	Roofing Materials 30 WG (East) Black, Fibrous, Heterogeneous	No Asbestos Detected
A-8 Shingle	Roofing Materials 30 WG (East) Gray/Black, Fibrous, Heterogeneous	No Asbestos Detected
A-8a Adhesive Like	Roofing Materials 30 WG (East) Brown/Black/Beige, Non-Fibrous, Homogeneous	No Asbestos Detected

A-9 Shingle 1	Roofing Materials 30 WG (East) Gray/Black/Green, Fibrous, Heterogeneous	No Asbestos Detected
A-9a Shingle 2	Roofing Materials 30 WG (East) Gray/Black, Fibrous, Heterogeneous	No Asbestos Detected
A-10	Roofing Materials 40 WG Gray/Black/Green, Non-Fibrous, Homogeneous	No Asbestos Detected
A-11	Roofing Materials 40 WG Gray/Black/Green, Fibrous, Heterogeneous	No Asbestos Detected
A-12 Shingle	Roofing Materials 40 WG Gray/Black/Green, Fibrous, Heterogeneous	No Asbestos Detected
A-12a Adhesive Like	Roofing Materials 40 WG Brown/Black/Beige, Non-Fibrous, Homogeneous	No Asbestos Detected
A-13	Roofing Materials 40 WG Gray/Black/Green, Fibrous, Heterogeneous	No Asbestos Detected
A-14	Roofing Materials 40 WG Gray/Black/Green, Fibrous, Heterogeneous	No Asbestos Detected
A-15 Shingle 1	Roofing Materials Library Gray/Black/Green, Fibrous, Heterogeneous	No Asbestos Detected
A-15a Shingle 2	Roofing Materials Library Gray/Black, Fibrous, Heterogeneous	No Asbestos Detected

A-16 Shingle 1	Roofing Materials Gray/Black/Green, Fibrous, Heterogeneous	Library	No Asbestos Detected
A-17 Shingle 1	Roofing Materials Gray/Black/Green, Fibrous, Heterogeneous	Library	No Asbestos Detected
A-17a Shingle 2	Roofing Materials Black, Fibrous, Heterogeneous	Library	No Asbestos Detected
A-18 Shingle	Roofing Materials Gray/Black/Green, Fibrous, Heterogeneous	Library	No Asbestos Detected
A-18a Mastic	Roofing Materials Black, Non-Fibrous, Homogeneous	Library	No Asbestos Detected
A-19 Mastic	Roofing Materials Brown/Black, Non-Fibrous, Homogeneous	Admin	4% Chrysotile Asbestos Detected
A-19a Tar	Roofing Materials Black, Non-Fibrous, Homogeneous	Admin	No Asbestos Detected
A-20	Roofing Materials Black, Non-Fibrous, Homogeneous	Admin	No Asbestos Detected
A-21 Roofing	Roofing Materials Black, Fibrous, Homogeneous	Admin	No Asbestos Detected
A-21a Roofing Tar	Roofing Materials Black, Non-Fibrous, Homogeneous	Admin	No Asbestos Detected

A-22	Roofing Materials Black, Non-Fibrous, Homogeneous	Admin	6% Chrysotile Asbestos Detected
A-23	Roofing Materials Black, Non-Fibrous, Homogeneous	Admin	No Asbestos Detected
A-24 Coating	Roofing Materials White, Non-Fibrous, Homogeneous	50/60 WG	No Asbestos Detected
A-24a Roofing	Roofing Materials Brown/Black, Fibrous, Homogeneous	50/60 WG	No Asbestos Detected
A-25 Coating	Roofing Materials White, Non-Fibrous, Homogeneous	50/60 WG	No Asbestos Detected
A-25a Roofing	Roofing Materials Black, Fibrous, Homogeneous	50/60 WG	No Asbestos Detected
A-26 Coating	Roofing Materials White, Non-Fibrous, Homogeneous	50/60 WG	No Asbestos Detected
A-26a Roofing	Roofing Materials Black, Fibrous, Homogeneous	50/60 WG	No Asbestos Detected
A-27 Coating	Roofing Materials White, Non-Fibrous, Homogeneous	50/60 WG	No Asbestos Detected
A-27a Roofing	Roofing Materials Brown/Black, Fibrous, Homogeneous	50/60 WG	No Asbestos Detected

A-28 Coating	Roofing Materials White, Non-Fibrous, Homogeneous	50/60 WG	No Asbestos Detected
A-28a Shingle	Roofing Materials White/Black, Fibrous, Heterogeneous	50/60 WG	No Asbestos Detected
A-29 Coating	Roofing Materials White, Non-Fibrous, Homogeneous	50/60 WG	No Asbestos Detected
A-29a Shingle	Roofing Materials White/Black, Fibrous, Heterogeneous	50/60 WG	No Asbestos Detected
A-30 Coating	Roofing Materials White, Non-Fibrous, Homogeneous	50/60 WG	No Asbestos Detected
A-30a Shingle	Roofing Materials Black, Fibrous, Heterogeneous	50/60 WG	No Asbestos Detected
A-31 Coating	Roofing Materials White, Non-Fibrous, Homogeneous	70 WG	No Asbestos Detected
A-31a Roofing	Roofing Materials Black, Fibrous, Homogeneous	70 WG	No Asbestos Detected
A-32 Coating	Roofing Materials White, Non-Fibrous, Homogeneous	70 WG	No Asbestos Detected
A-32a Roofing	Roofing Materials Black, Fibrous, Homogeneous	70 WG	No Asbestos Detected

A-33 Coating	Roofing Materials White, Non-Fibrous, Homogeneous	70 WG	No Asbestos Detected
A-33a Roofing	Roofing Materials Black, Fibrous, Heterogeneous	70 WG	No Asbestos Detected
A-34 Coating	Roofing Materials White, Non-Fibrous, Homogeneous	70 WG	No Asbestos Detected
A-34a Shingle 1	Roofing Materials Black, Fibrous, Homogeneous	70 WG	No Asbestos Detected
A-34b Shingle 2	Roofing Materials Brown/Black, Fibrous, Heterogeneous	70 WG	No Asbestos Detected
A-35 Coating	Roofing Materials White, Non-Fibrous, Homogeneous	70 WG	No Asbestos Detected
A-35a Shingle	Roofing Materials White/Black, Fibrous, Heterogeneous	70 WG	No Asbestos Detected
A-35b Felt	Roofing Materials Black, Fibrous, Homogeneous	70 WG	No Asbestos Detected
A-36 Felts	Roofing Materials Gray/Black, Fibrous, Homogeneous	Gym	No Asbestos Detected
A-36a Tar	Roofing Materials Black, Non-Fibrous, Homogeneous	Gym	No Asbestos Detected

A-37 Roofing	Roofing Materials Black, Fibrous, Homogeneous	Gym	No Asbestos Detected
A-37a Mesh	Roofing Materials Yellow, Fibrous, Homogeneous	Gym	No Asbestos Detected
A-37b Tar	Roofing Materials Black, Non- Fibrous, Homogeneous	Gym	No Asbestos Detected
A-38 Roofing	Roofing Materials Black, Fibrous, Homogeneous	Gym	No Asbestos Detected
A-38a Mesh	Roofing Materials Yellow, Non-Fibrous, Homogeneous	Gym	No Asbestos Detected
A-38b Tar	Roofing Materials Black, Non- Fibrous, Homogeneous	Gym	No Asbestos Detected
A-39 Roofing	Roofing Materials Gray/Black, Fibrous, Heterogeneous	Gym	No Asbestos Detected
A-39a Tar	Roofing Materials Black, Non-Fibrous, Homogeneous	Gym	No Asbestos Detected
A-40 Roofing	Roofing Materials Black, Fibrous, Homogeneous	Gym	No Asbestos Detected
A-40a Mesh	Roofing Materials Yellow, Non-Fibrous, Homogeneous	Gym	No Asbestos Detected

A-40b Tar	Roofing Materials Black, Non- Fibrous, Homogeneous	Gym	No Asbestos Detected
A-41 Roofing	Roofing Materials Black, Fibrous, Homogeneous	Gym	No Asbestos Detected
A-41a Mesh	Roofing Materials Yellow, Fibrous, Homogeneous	Gym	No Asbestos Detected
A-41b Tar	Roofing Materials Black, Non- Fibrous, Homogeneous	Gym	No Asbestos Detected
A-42 Roofing	Roofing Materials Black, Fibrous, Heterogeneous	Gym	No Asbestos Detected
A-42a Mesh	Roofing Materials Yellow, Fibrous, Homogeneous	Gym	No Asbestos Detected
A-42b Tar	Roofing Materials Black, Non- Fibrous, Homogeneous	Gym	No Asbestos Detected
A-43 Roofing	Roofing Materials Black, Fibrous, Homogeneous	Cafeteria	No Asbestos Detected
A-43a Tar	Roofing Materials Black, Non-Fibrous, Homogeneous	Cafeteria	No Asbestos Detected
A-44 Roofing	Roofing Materials Black, Fibrous, Homogeneous	Cafeteria	No Asbestos Detected

A-44a Mesh	Roofing Materials Yellow, Non-Fibrous, Homogeneous	Cafeteria	No Asbestos Detected
A-44b Tar	Roofing Materials Black, Non-Fibrous, Homogeneous	Cafeteria	No Asbestos Detected
A-45 Roofing	Roofing Materials White/Black, Fibrous, Heterogeneous	Cafeteria	No Asbestos Detected
A-45a Tar	Roofing Materials Black, Non-Fibrous, Homogeneous	Cafeteria	No Asbestos Detected
A-46 Mastic	Roofing Materials Gray/Black, Non-Fibrous, Homogeneous	Cafeteria	No Asbestos Detected
A-46a Roofing	Roofing Materials Black, Fibrous, Homogeneous	Cafeteria	No Asbestos Detected
A-47 Mastic	Roofing Materials Black, Non-Fibrous, Homogeneous	Cafeteria	No Asbestos Detected
A-47a Roofing	Roofing Materials Black, Fibrous, Homogeneous	Cafeteria	No Asbestos Detected
A-47b Adhesive	Roofing Materials Yellow, Non-Fibrous, Homogeneous	Cafeteria	No Asbestos Detected
A-48 Mastic	Roofing Materials Gray/Black, Non-Fibrous, Homogeneous	Shop/Music	No Asbestos Detected

A-48a Roofing	Roofing Materials Brown/Black, Fibrous, Homogeneous	Shop/Music	No Asbestos Detected
A-48b Adhesive	Roofing Materials Brown/Black/Beige, Non-Fibrous, Homogeneous	Shop/Music	No Asbestos Detected
A-49 Shingle	Roofing Materials Gray/Black, Fibrous, Heterogeneous	Shop/Music	No Asbestos Detected
A-49a Mastic	Roofing Materials Black, Non-Fibrous, Homogeneous	Shop/Music	No Asbestos Detected
A-50	Roofing Materials Brown/Black/Green, Fibrous, Heterogeneous	Shop/Music	No Asbestos Detected
A-51	Roofing Materials Brown/Gray/Green, Fibrous, Heterogeneous	Shop/Music	No Asbestos Detected
A-52 Shingle 1	Roofing Materials Brown/Black/Green, Fibrous, Heterogeneous	Shop/Music	No Asbestos Detected
A-52a Shingle 2	Roofing Materials White/Black, Fibrous, Heterogeneous	Shop/Music	No Asbestos Detected
A-53	Roofing Materials Brown/Black/Green, Fibrous, Heterogeneous	Shop/Music	No Asbestos Detected
A-54 Shingle 1	Roofing Materials Gray/Black/Green, Fibrous, Heterogeneous	Shop/Music	No Asbestos Detected

A-54a Shingle 2	Roofing Materials Brown/Green, Fibrous, Heterogeneous	Shop/Music	No Asbestos Detected
A-54b Shingle 3	Roofing Materials Brown/Gray, Fibrous, Heterogeneous	Shop/Music	No Asbestos Detected
A-55	Penetration Mastic Gray/Black, Non-Fibrous, Homogeneous	20 WG Roof	No Asbestos Detected
A-56	Penetration Mastic Gray/Black, Non-Fibrous, Homogeneous	20 WG Roof	No Asbestos Detected
A-57	Penetration Mastic Gray/Black, Non-Fibrous, Homogeneous	20 WG Roof	No Asbestos Detected
A-58	Penetration Mastic Gray/Black, Non-Fibrous, Homogeneous	30 WG Roof	No Asbestos Detected
A-59	Penetration Mastic Brown/Black, Fibrous, Heterogeneous	30 WG Roof	No Asbestos Detected
A-60	Penetration Mastic Gray/Black, Non-Fibrous, Homogeneous	30 WG Roof	No Asbestos Detected
A-61 Mastic 1	Penetration Mastic White/Black, Non-Fibrous, Homogeneous	40 WG/Library	No Asbestos Detected
A-61a Mastic 2	Penetration Mastic Black, Fibrous, Homogeneous	40 WG/Library	No Asbestos Detected

A-62 Mastic 1	Penetration Mastic Gray/Black, Non-Fibrous, Homogeneous	40 WG/Library	No Asbestos Detected
A-62a Mastic 2	Penetration Mastic Black, Non-Fibrous, Homogeneous	40 WG/Library	No Asbestos Detected
A-63	Penetration Mastic Gray/Black, Non-Fibrous, Homogeneous	40 WG/Library	No Asbestos Detected
A-64	Penetration Mastic Brown/Gray/Black, Non-Fibrous, Homogeneous	50/60 WG	No Asbestos Detected
A-65	Penetration Mastic Brown, Non-Fibrous, Homogeneous	50/60 WG	No Asbestos Detected
A-66	Penetration Mastic Brown/Black, Fibrous, Heterogeneous	50/60 WG	No Asbestos Detected
A-67	Penetration Mastic Black/Silver, Non-Fibrous, Homogeneous	70 WG	No Asbestos Detected
A-68	Penetration Mastic Gray/Black, Non-Fibrous, Homogeneous	70 WG	No Asbestos Detected
A-69	Penetration Mastic Gray/Black, Non-Fibrous, Homogeneous	70 WG	No Asbestos Detected
A-70	Penetration Mastic White/Black, Fibrous, Heterogeneous	Gym	No Asbestos Detected

A-71 Silver Paint	Penetration Mastic Silver, Non-Fibrous, Homogeneous	Gym	No Asbestos Detected
A-71a Roofing	Penetration Mastic Black, Fibrous, Homogeneous	Gym	No Asbestos Detected
A-71b Felt	Penetration Mastic Black, Fibrous, Homogeneous	Gym	No Asbestos Detected
A-72 Silver Paint	Penetration Mastic Silver, Non-Fibrous, Homogeneous	Gym	No Asbestos Detected
A-72a Roofing	Penetration Mastic Black, Fibrous, Homogeneous	Gym	No Asbestos Detected
A-72b Felt	Penetration Mastic Black, Fibrous, Homogeneous	Gym	No Asbestos Detected
A-73 Shingle	Penetration Mastic White/Black, Fibrous, Heterogeneous	Admin	No Asbestos Detected
A-73a Mastic	Penetration Mastic Black, Non-Fibrous, Homogeneous	Admin	No Asbestos Detected
A-74	Penetration Mastic Brown/Black, Fibrous, Heterogeneous	Admin	No Asbestos Detected
A-75	Penetration Mastic Black, Fibrous, Heterogeneous	Admin	No Asbestos Detected

A-76 Shingle	Penetration Mastic White/Black, Fibrous, Heterogeneous	Cafeteria	No Asbestos Detected
A-76a Mastic	Penetration Mastic Black, Non-Fibrous, Homogeneous	Cafeteria	No Asbestos Detected
A-77	Penetration Mastic Gray/Black, Non-Fibrous, Homogeneous	Cafeteria	No Asbestos Detected
A-78 Shingle	Penetration Mastic Gray/Black, Fibrous, Heterogeneous	Cafeteria	No Asbestos Detected
A-78a Mastic	Penetration Mastic Black, Non-Fibrous, Homogeneous	Cafeteria	No Asbestos Detected
A-79	Penetration Mastic White/Black, Fibrous, Homogeneous	Music/Shops	No Asbestos Detected
A-80	Penetration Mastic Black, Fibrous, Homogeneous	Music/Shops	No Asbestos Detected
A-81	Penetration Mastic Gray/Black, Fibrous, Heterogeneous	Music/Shops	No Asbestos Detected


See Attached “Polarized Microscopy Asbestos Analysis Report” and associated chain of custody document for additional detail regarding location of samples (Appendix A).

2.0 RECOMMENDATIONS

Due to the findings, removal of these items **is** required to be performed by a California-licensed and registered asbestos abatement contractor. This report should be kept as part of the permanent archive of the subject property. If you have any questions or comments concerning this information or this report, please contact our office.

Yours very truly,

ENVIRONMENTAL TESTING ASSOCIATES,



_____

Kevin R. Riley, Certified Asbestos Consultant (17-5871)
NIOSH 582 Certification # 120400LA-06
NV-IJPM-1674
Attachments: Laboratory analytical results data sheet.

APPENDIX A

ANALYTICAL DATA

LA Testing

520 Mission Street South Pasadena, CA 91030

Tel/Fax: (323) 254-9960 / (323) 254-9982

http://www.LATesting.com / pasadenalab@latesting.com

LA Testing Order:	322413415
Customer ID:	32ETAS62
Customer PO:	
Project ID:	

Attention:	Kevin Riley	**Phone:**	
	Environmental Testing Associates	**Fax:**	(805) 497-7377
	850 Hampshire Rd	**Received Date:**	05/29/2024 10:25 AM
	Suite G	**Analysis Date:**	05/29/2024
	Westlake Village, CA 91361	**Collected Date:**	05/09/2024
Project:	Cabrillo Middle School Roofing Project- Ventura Unified School District/ 1426 East Santa Clara Street Ventura, CA 93003		

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

			Non-Asbestos		Asbestos
Sample	**Description**	**Appearance**	**% Fibrous**	**% Non-Fibrous**	**% Type**
A1-Shingle 1 *322413415-0001*	Roofing materials	Gray/Black/Green Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A1-Shingle 2 *322413415-0001A*	Roofing materials	Black Fibrous Heterogeneous	8% Glass	92% Non-fibrous (Other)	None Detected
A2-Shingle 1 *322413415-0002*	Roofing materials	Gray/Black/Green Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A2-Shingle 2 *322413415-0002A*	Roofing materials	Black Fibrous Heterogeneous	8% Glass	92% Non-fibrous (Other)	None Detected
A3-Shingle 1 *322413415-0003*	Roofing materials	Gray/Black/Yellow Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A3-Mastic *322413415-0003A*	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A3-Shingle 2 *322413415-0003B*	Roofing materials	Gray/Black Fibrous Heterogeneous	15% Synthetic	85% Non-fibrous (Other)	None Detected
A3-Adhesive Like *322413415-0003C*	Roofing materials	Brown/Black/Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A4-Mastic *322413415-0004*	Roofing materials	Gray/Black Non-Fibrous Homogeneous	8% Cellulose	92% Non-fibrous (Other)	None Detected
A4-Shingle 1 *322413415-0004A*	Roofing materials	Gray/Black Fibrous Heterogeneous	12% Synthetic	88% Non-fibrous (Other)	None Detected
A4-Adhesive-Like *322413415-0004B*	Roofing materials	Brown/Black/Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A4-Shingle 2 *322413415-0004C*	Roofing materials	Black Fibrous Heterogeneous	8% Glass	92% Non-fibrous (Other)	None Detected
A5-Mastic *322413415-0005*	Roofing materials	Gray/Black Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
A5-Shingle 1 *322413415-0005A*	Roofing materials	Gray/Black Fibrous Heterogeneous	10% Synthetic	90% Non-fibrous (Other)	None Detected
A5-Adhesive-Like *322413415-0005B*	Roofing materials	Brown/Black/Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A5-Shingle 2 *322413415-0005C*	Roofing materials	Black Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected

Initial report from: 05/29/2024 20:40:40

LA Testing
520 Mission Street South Pasadena, CA 91030
Tel/Fax: (323) 254-9960 / (323) 254-9982
http://www.LATesting.com / pasadenalab@latesting.com

LA Testing Order:	322413415
Customer ID:	32ETAS62
Customer PO:	
Project ID:	

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

			Non-Asbestos		Asbestos
Sample	**Description**	**Appearance**	**% Fibrous**	**% Non-Fibrous**	**% Type**
A6-Shingle 1 *322413415-0006*	Roofing materials	Gray/Black/Green Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A6-Shingle 2 *322413415-0006A*	Roofing materials	Gray/Black Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A7-Shingle 1 *322413415-0007*	Roofing materials	Gray/Black/Green Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A7-Shingle 2 *322413415-0007A*	Roofing materials	Black Fibrous Heterogeneous	8% Glass	92% Non-fibrous (Other)	None Detected
A8-Shingle *322413415-0008*	Roofing materials	Gray/Black Fibrous Heterogeneous	12% Glass	88% Non-fibrous (Other)	None Detected
A8-Adhesive-Like *322413415-0008A*	Roofing materials	Brown/Black/Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A9-Shingle 1 *322413415-0009*	Roofing materials	Gray/Black/Green Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A9-Shingle 2 *322413415-0009A*	Roofing materials	Gray/Black Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A10 *322413415-0010*	Roofing materials	Gray/Black/Green Non-Fibrous Homogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A11 *322413415-0011*	Roofing materials	Gray/Black/Green Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A12-Shingle *322413415-0012*	Roofing materials	Gray/Black/Green Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A12-Adhesive Like *322413415-0012A*	Roofing materials	Brown/Black/Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A13 *322413415-0013*	Roofing materials	Gray/Black/Green Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A14 *322413415-0014*	Roofing materials	Gray/Black/Green Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A15-Shingle 1 *322413415-0015*	Roofing materials	Gray/Black/Green Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A15-Shingle 2 *322413415-0015A*	Roofing materials	Gray/Black Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A16-Shingle 1 *322413415-0016*	Roofing materials	Gray/Black/Green Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A17-Shingle 1 *322413415-0017*	Roofing materials	Gray/Black/Green Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A17-Shingle 2 *322413415-0017A*	Roofing materials	Black Fibrous Heterogeneous	12% Glass	88% Non-fibrous (Other)	None Detected

Initial report from: 05/29/2024 20:40:40

LA Testing
520 Mission Street South Pasadena, CA 91030
Tel/Fax: (323) 254-9960 / (323) 254-9982
http://www.LATesting.com / pasadenalab@latesting.com

LA Testing Order: 322413415
Customer ID: 32ETAS62
Customer PO:
Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

			Non-Asbestos		Asbestos
Sample	**Description**	**Appearance**	**% Fibrous**	**% Non-Fibrous**	**% Type**
A18-Shingle *322413415-0018*	Roofing materials	Gray/Black/Green Fibrous Heterogeneous	15% Glass	85% Non-fibrous (Other)	None Detected
A18-Mastic *322413415-0018A*	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A19-Mastic *322413415-0019*	Roofing materials	Brown/Black Non-Fibrous Homogeneous		96% Non-fibrous (Other)	**4% Chrysotile**
A19-Tar *322413415-0019A*	Roofing materials	Black Non-Fibrous Homogeneous	8% Glass	92% Non-fibrous (Other)	None Detected
A20 *322413415-0020*	Roofing materials	Black Non-Fibrous Homogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A21-Roofing *322413415-0021*	Roofing materials	Black Fibrous Homogeneous	15% Glass	85% Non-fibrous (Other)	None Detected
A21-Tar *322413415-0021A*	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A22 *322413415-0022*	Roofing materials	Black Non-Fibrous Homogeneous		94% Non-fibrous (Other)	**6% Chrysotile**
A23 *322413415-0023*	Roofing materials	Black Non-Fibrous Homogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A24-Coating *322413415-0024*	Roofing materials	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A24-Roofing *322413415-0024A*	Roofing materials	Brown/Black Fibrous Homogeneous	20% Synthetic	80% Non-fibrous (Other)	None Detected
A25-Coating *322413415-0025*	Roofing materials	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A25-Roofing *322413415-0025A*	Roofing materials	Black Fibrous Homogeneous	20% Cellulose	80% Non-fibrous (Other)	None Detected
A26-Coating *322413415-0026*	Roofing materials	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A26-Roofing *322413415-0026A*	Roofing materials	Black Fibrous Homogeneous	10% Synthetic	90% Non-fibrous (Other)	None Detected
A27-Coating *322413415-0027*	Roofing materials	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A27-Roofing *322413415-0027A*	Roofing materials	Brown/Black Fibrous Homogeneous	20% Synthetic	80% Non-fibrous (Other)	None Detected
A28-Coating *322413415-0028*	Roofing materials	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A28-Shingle *322413415-0028A*	Roofing materials	White/Black Fibrous Heterogeneous	10% Synthetic	90% Non-fibrous (Other)	None Detected

Initial report from: 05/29/2024 20:40:40

LA Testing
520 Mission Street South Pasadena, CA 91030
Tel/Fax: (323) 254-9960 / (323) 254-9982
http://www.LATesting.com / pasadenalab@latesting.com

LA Testing Order: 322413415
Customer ID: 32ETAS62
Customer PO:
Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

			Non-Asbestos		Asbestos
Sample	**Description**	**Appearance**	**% Fibrous**	**% Non-Fibrous**	**% Type**
A29-Coating *322413415-0029*	Roofing materials	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A29-Shingle *322413415-0029A*	Roofing materials	White/Black Fibrous Heterogeneous	10% Synthetic	90% Non-fibrous (Other)	None Detected
A30-Coating *322413415-0030*	Roofing materials	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A30-Shingle *322413415-0030A*	Roofing materials	Black Fibrous Heterogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
A31-Coating *322413415-0031*	Roofing materials	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A31-Roofing *322413415-0031A*	Roofing materials	Black Fibrous Homogeneous	10% Synthetic	90% Non-fibrous (Other)	None Detected
A32-Coating *322413415-0032*	Roofing materials	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A32-Roofing *322413415-0032A*	Roofing materials	Black Fibrous Homogeneous	12% Synthetic	88% Non-fibrous (Other)	None Detected
A33-Coating *322413415-0033*	Roofing materials	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A33-Roofing *322413415-0033A*	Roofing materials	Black Fibrous Heterogeneous	15% Synthetic	85% Non-fibrous (Other)	None Detected
A34-Coating *322413415-0034*	Roofing materials	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A34-Shingle 1 *322413415-0034A*	Roofing materials	Gray/Black Fibrous Heterogeneous	10% Synthetic	90% Non-fibrous (Other)	None Detected
A34-Shingle 2 *322413415-0034B*	Roofing materials	Brown/Black Fibrous Heterogeneous	10% Synthetic	90% Non-fibrous (Other)	None Detected
A35-Coating *322413415-0035*	Roofing materials	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A35-Shingle *322413415-0035A*	Roofing materials	White/Black Fibrous Heterogeneous	10% Synthetic	90% Non-fibrous (Other)	None Detected
A35-Felt *322413415-0035B*	Roofing materials	Black Fibrous Homogeneous	8% Cellulose	92% Non-fibrous (Other)	None Detected
A36-Felts *322413415-0036*	Roofing materials	Gray/Black Fibrous Homogeneous	25% Glass	75% Non-fibrous (Other)	None Detected
A36-Tar *322413415-0036A*	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A37-Roofing *322413415-0037*	Roofing materials	Black Fibrous Homogeneous	10% Glass	90% Non-fibrous (Other)	None Detected

Initial report from: 05/29/2024 20:40:40

LA Testing
520 Mission Street South Pasadena, CA 91030
Tel/Fax: (323) 254-9960 / (323) 254-9982
http://www.LATesting.com / pasadenalab@latesting.com

LA Testing Order: 322413415
Customer ID: 32ETAS62
Customer PO:
Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

			Non-Asbestos		Asbestos
Sample	**Description**	**Appearance**	**% Fibrous**	**% Non-Fibrous**	**% Type**
A37-Mesh *322413415-0037A*	Roofing materials	Yellow Fibrous Homogeneous	98% Glass	2% Non-fibrous (Other)	None Detected
A37-Tar *322413415-0037B*	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A38-Roofing *322413415-0038*	Roofing materials	Black Fibrous Homogeneous	8% Glass	92% Non-fibrous (Other)	None Detected
A38-Mesh *322413415-0038A*	Roofing materials	Yellow Non-Fibrous Homogeneous	98% Glass	2% Non-fibrous (Other)	None Detected
A38-Tar *322413415-0038B*	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A39-Roofing *322413415-0039*	Roofing materials	Gray/Black Fibrous Heterogeneous	20% Glass	80% Non-fibrous (Other)	None Detected
A39-Tar *322413415-0039A*	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A40-Roofing *322413415-0040*	Roofing materials	Black Fibrous Homogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A40-Mesh *322413415-0040A*	Roofing materials	Yellow Fibrous Homogeneous	98% Glass	2% Non-fibrous (Other)	None Detected
A40-Tar *322413415-0040B*	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A41-Roofing *322413415-0041*	Roofing materials	Black Fibrous Homogeneous	12% Glass	88% Non-fibrous (Other)	None Detected
A41-Mesh *322413415-0041A*	Roofing materials	Yellow Fibrous Homogeneous	98% Glass	2% Non-fibrous (Other)	None Detected
A41-Tar *322413415-0041B*	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A42-Roofing *322413415-0042*	Roofing materials	Black Fibrous Heterogeneous	20% Glass	80% Non-fibrous (Other)	None Detected
A42-Mesh *322413415-0042A*	Roofing materials	Yellow Fibrous Homogeneous	98% Glass	2% Non-fibrous (Other)	None Detected
A42-Tar *322413415-0042B*	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A43-Roofing *322413415-0043*	Roofing materials	Black Fibrous Homogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A43-Tar *322413415-0043A*	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A44-Roofing *322413415-0044*	Roofing materials	Black Fibrous Homogeneous	10% Glass	90% Non-fibrous (Other)	None Detected

Initial report from: 05/29/2024 20:40:40

LA Testing
520 Mission Street South Pasadena, CA 91030
Tel/Fax: (323) 254-9960 / (323) 254-9982
http://www.LATesting.com / pasadenalab@latesting.com

LA Testing Order: 322413415
Customer ID: 32ETAS62
Customer PO:
Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

			Non-Asbestos		Asbestos
Sample	**Description**	**Appearance**	**% Fibrous**	**% Non-Fibrous**	**% Type**
A44-Mesh *322413415-0044A*	Roofing materials	Yellow Non-Fibrous Homogeneous	98% Glass	2% Non-fibrous (Other)	None Detected
A44-Tar *322413415-0044B*	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A45-Roofing *322413415-0045*	Roofing materials	White/Black Fibrous Heterogeneous	15% Synthetic	85% Non-fibrous (Other)	None Detected
A45-Tar *322413415-0045A*	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A46-Mastic *322413415-0046*	Roofing materials	Gray/Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A46-Roofing *322413415-0046A*	Roofing materials	Black Fibrous Homogeneous	12% Synthetic	88% Non-fibrous (Other)	None Detected
A47-Mastic *322413415-0047*	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A47-Roofing *322413415-0047A*	Roofing materials	Black Fibrous Homogeneous	12% Synthetic	88% Non-fibrous (Other)	None Detected
A47-Adhesive *322413415-0047B*	Roofing materials	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A48-Mastic *322413415-0048*	Roofing materials	Gray/Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A48-Roofing *322413415-0048A*	Roofing materials	Brown/Black Fibrous Homogeneous	15% Synthetic	85% Non-fibrous (Other)	None Detected
A48-Adhesive *322413415-0048B*	Roofing materials	Brown/Black/Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A49-Shingle *322413415-0049*	Roofing materials	Gray/Black Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A49-Mastic *322413415-0049A*	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A50 *322413415-0050*	Roofing materials	Brown/Black/Green Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A51 *322413415-0051*	Roofing materials	Brown/Gray/Green Fibrous Heterogeneous	15% Glass	85% Non-fibrous (Other)	None Detected
A52-Shingle 1 *322413415-0052*	Roofing materials	Brown/Black/Green Fibrous Heterogeneous	12% Glass	88% Non-fibrous (Other)	None Detected
A52-Shingle 2 *322413415-0052A*	Roofing materials	White/Black Fibrous Heterogeneous	10% Synthetic	90% Non-fibrous (Other)	None Detected
A53 *322413415-0053*	Roofing materials	Brown/Black/Green Fibrous Heterogeneous		100% Non-fibrous (Other)	None Detected

Initial report from: 05/29/2024 20:40:40

LA Testing
520 Mission Street South Pasadena, CA 91030
Tel/Fax: (323) 254-9960 / (323) 254-9982
http://www.LATesting.com / pasadenalab@latesting.com

LA Testing Order: 322413415
Customer ID: 32ETAS62
Customer PO:
Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

			Non-Asbestos		Asbestos
Sample	**Description**	**Appearance**	**% Fibrous**	**% Non-Fibrous**	**% Type**
A54-Shingle 1 *322413415-0054*	Roofing materials	Gray/Black/Green Fibrous Heterogeneous	15% Glass	85% Non-fibrous (Other)	None Detected
A54-Shingle 2 *322413415-0054A*	Roofing materials	Brown/Green Fibrous Heterogeneous	15% Glass	85% Non-fibrous (Other)	None Detected
A54-Shingle 3 *322413415-0054B*	Roofing materials	Brown/Gray Fibrous Heterogeneous	20% Synthetic	80% Non-fibrous (Other)	None Detected
A54-Tar *322413415-0054C*	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A55 *322413415-0055*	Penetration mastic	Gray/Black Non-Fibrous Homogeneous	8% Cellulose	92% Non-fibrous (Other)	None Detected
A56 *322413415-0056*	Penetration mastic	Gray/Black Non-Fibrous Homogeneous	8% Cellulose	92% Non-fibrous (Other)	None Detected
A57 *322413415-0057*	Penetration mastic	Gray/Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A58 *322413415-0058*	Penetration mastic	Gray/Black Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
A59 *322413415-0059*	Penetration mastic	Brown/Black Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A60 *322413415-0060*	Penetration mastic	Gray/Black Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
A61-Mastic 1 *322413415-0061*	Penetration mastic	White/Black Non-Fibrous Homogeneous	8% Cellulose	92% Non-fibrous (Other)	None Detected
A61-Mastic 2 *322413415-0061A*	Penetration mastic	Black Fibrous Homogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A62-Mastic 1 *322413415-0062*	Penetration mastic	Gray/Black Non-Fibrous Homogeneous	8% Cellulose	92% Non-fibrous (Other)	None Detected
A62-Mastic 2 *322413415-0062A*	Penetration mastic	Black Non-Fibrous Homogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A63 *322413415-0063*	Penetration mastic	Gray/Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A64 *322413415-0064*	Penetration mastic	Brown/Gray/Black Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
A65 *322413415-0065*	Penetration mastic	Black Non-Fibrous Homogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A66 *322413415-0066*	Penetration mastic	Brown/Black Fibrous Heterogeneous	15% Glass	85% Non-fibrous (Other)	None Detected
A67 *322413415-0067*	Penetration mastic	Black/Silver Non-Fibrous Homogeneous	2% Cellulose	98% Non-fibrous (Other)	None Detected

Initial report from: 05/29/2024 20:40:40

LA Testing
520 Mission Street South Pasadena, CA 91030
Tel/Fax: (323) 254-9960 / (323) 254-9982
http://www.LATesting.com / pasadenalab@latesting.com

LA Testing Order: 322413415
Customer ID: 32ETAS62
Customer PO:
Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

			Non-Asbestos		Asbestos
Sample	**Description**	**Appearance**	**% Fibrous**	**% Non-Fibrous**	**% Type**
A68 *322413415-0068*	Penetration mastic	Gray/Black Non-Fibrous Homogeneous	5% Cellulose	95% Non-fibrous (Other)	None Detected
A69 *322413415-0069*	Penetration mastic	Gray/Black Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
A70 *322413415-0070*	Penetration mastic	White/Black Fibrous Heterogeneous	8% Cellulose	92% Non-fibrous (Other)	None Detected
A71-Silver Paint *322413415-0071*	Penetration mastic	Silver Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A71-Roofing *322413415-0071A*	Penetration mastic	Black Fibrous Homogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A71-Felt *322413415-0071B*	Penetration mastic	Black Fibrous Homogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A72-Silver Paint *322413415-0072*	Penetration mastic	Silver Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A72-Roofing *322413415-0072A*	Penetration mastic	Black Fibrous Homogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A72-Felt *322413415-0072B*	Penetration mastic	Black Fibrous Homogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A73-Shingle *322413415-0073*	Penetration mastic	White/Black Fibrous Heterogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
A73-Mastic *322413415-0073A*	Penetration mastic	Black Non-Fibrous Homogeneous	8% Glass	92% Non-fibrous (Other)	None Detected
A74 *322413415-0074*	Penetration mastic	Brown/Black Fibrous Heterogeneous	10% Glass	90% Non-fibrous (Other)	None Detected
A75 *322413415-0075*	Penetration mastic	Black Fibrous Heterogeneous	10% Cellulose 5% Glass	85% Non-fibrous (Other)	None Detected
A76-Shingle *322413415-0076*	Penetration mastic	White/Black Fibrous Heterogeneous	8% Glass	92% Non-fibrous (Other)	None Detected
A76-Mastic *322413415-0076A*	Penetration mastic	Black Non-Fibrous Homogeneous	6% Cellulose	94% Non-fibrous (Other)	None Detected
A77 *322413415-0077*	Penetration mastic	Gray/Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A78-Shingle *322413415-0078*	Penetration mastic	Gray/Black Fibrous Heterogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
A78-Mastic *322413415-0078A*	Penetration mastic	Black Non-Fibrous Homogeneous	5% Cellulose	95% Non-fibrous (Other)	None Detected
A79 *322413415-0079*	Penetration mastic	White/Black Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected

Initial report from: 05/29/2024 20:40:40

LA Testing

520 Mission Street South Pasadena, CA 91030

Tel/Fax: (323) 254-9960 / (323) 254-9982

http://www.LATesting.com / pasadenalab@latesting.com

LA Testing Order:	322413415
Customer ID:	32ETAS62
Customer PO:	
Project ID:	

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

			Non-Asbestos		Asbestos
Sample	**Description**	**Appearance**	**% Fibrous**	**% Non-Fibrous**	**% Type**
A80 *322413415-0080*	Penetration mastic	Black Fibrous Homogeneous	8% Glass	92% Non-fibrous (Other)	None Detected
A81 *322413415-0081*	Penetration mastic	Gray/Black Fibrous Heterogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected

Analyst(s)

David Flores (98)

Tania Lopez (53)

Jerry Drapala Ph.D, Laboratory Manager
or Other Approved Signatory

LA Testing maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by LA Testing. LA Testing bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 “Interim Method”) but augmented with procedures outlined in the 1993 (”final”) version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore LA Testing recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by LA Testing South Pasadena, CA NVLAP Lab Code 200232-0, CA ELAP 2283

Initial report from: 05/29/2024 20:40:40

#322413415

Environmental Testing Associates

CHAIN OF CUSTODY

L.A. TESTING
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361 Phone: 805.497.7499 Fax: 805.497.7477

Project Name: **Cabrillo Middle** SCHOOL Roofing Project- VENTURA UNIFIED SCHOOL DISTRICT Inspector: Kevin Riley Date: 05/09/2024

Project Address: 1426 East Santa Clara Street Ventura, CA 93003

Client Name: VENTURA UNIFIED SCHOOL DISTRICT Contact # Ryan Hughes 805.901.9620

Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A1	**Roofing Materials**	G/D/SD	>5K ft	PLM	20 WG E	NF
A2	**Roofing Materials**	G/D/SD		PLM		
A3	**Roofing Materials**	G/D/SD		PLM		
A4	**Roofing Materials**	G/D/SD		PLM		
A5	**Roofing Materials**	G/D/SD		PLM		
A6	**Roofing Materials**	G/D/SD		PLM	30 WG W	
A7	**Roofing Materials**	G/D/SD		PLM		
A8	**Roofing Materials**	G/D/SD		PLM		
A9	**Roofing Materials**	G/D/SD		PLM		

Relinquished by: _____ DATE: 5.21.24 TIME: 7pm ☐Sent Via FedEx ☒Hand Delivered to Lab
Kevin Riley CAC-17-5871

Received by: Rachel Rangel (WI) _____ DATE: 5/29/24 TIME: 10:25
Name (please print) Signature

Requested Analysis Circle one: 6 Hour

Page 1 of 11

Page 1 Of 11

OrderID: 322413415

#322413415

Environmental Testing Associates

CHAIN OF CUSTODY

L.A. TESTING
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361 Phone: 805.497.7499 Fax: 805.497.7477

Project Name: **Cabrillo Middle** SCHOOL Roofing Project- VENTURA UNIFIED SCHOOL DISTRICT Inspector: Kevin Riley Date: 05/09/2024

Project Address: 1426 East Santa Clara Street Ventura, CA 93003

Client Name: VENTURA UNIFIED SCHOOL DISTRICT Contact # Ryan Hughes 805.901.9620

Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A-10	**Roofing Materials**	G/D/SD	>5x0	PLM	40 wks	NF
A11	**Roofing Materials**	G/D/SD		PLM		
A12	**Roofing Materials**	G/D/SD		PLM		
A13	**Roofing Materials**	G/D/SD		PLM		
A14	**Roofing Materials**	G/D/SD		PLM		
A15	**Roofing Materials**	G/D/SD		PLM	Layers	
A16	**Roofing Materials**	G/D/SD		PLM		
A17	**Roofing Materials**	G/D/SD		PLM		
A18	**Roofing Materials**	G/D/SD		PLM		

Relinquished by: _____ DATE: 5-24-24 TIME: 4p ☒Sent Via FedEx ☐Hand Delivered to Lab
Kevin Riley CAC-17-5871

Received by: Rachel Rangel (WI) _____ DATE: 5/29/24 TIME: 10:25
Name (please print) Signature

Requested Analysis Circle one: 6 Hour

Page 2 of 11

OrderID: 322413415

#322413415

Environmental Testing Associates

CHAIN OF CUSTODY

L.A. TESTING
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361 Phone: 805.497.7499 Fax: 805.497.7477

Project Name: **Cabrillo Middle** SCHOOL Roofing Project- VENTURA UNIFIED SCHOOL DISTRICT Inspector: Kevin Riley Date: 05/09/2024

Project Address: 1426 East Santa Clara Street Ventura, CA 93003

Client Name: VENTURA UNIFIED SCHOOL DISTRICT Contact # Ryan Hughes 805.901.9620

Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A19	**Roofing Materials**	G/D/SD	5K	PLM	ASAP	NF
A20	**Roofing Materials**	G/D/SD		PLM		
A21	**Roofing Materials**	G/D/SD		PLM		
A22	**Roofing Materials**	G/D/SD		PLM		
A23	**Roofing Materials**	G/D/SD		PLM		
	Roofing Materials	G/D/SD		PLM		
	Roofing Materials	G/D/SD		PLM		
	Roofing Materials	G/D/SD		PLM		
	Roofing Materials	G/D/SD		PLM		

Relinquished by: _____ DATE: 5-24-24 TIME: 4p ☒Sent Via FedEx ☐Hand Delivered to Lab
Kevin Riley CAC-17-5871

Received by: Rachel Rangel (WI) _____ DATE: 5/29/24 TIME: 10:25
Name (please print) Signature

Requested Analysis Circle one: 6 Hour

Page 3 of 11

Page 3 Of 11

OrderID: 322413415

#322413415

CHAIN OF CUSTODY

Environmental Testing Associates

L.A. TESTING
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361 Phone: 805.497.7499 Fax: 805.497.7477

Project Name: **Cabrillo Middle** SCHOOL Roofing Project- VENTURA UNIFIED SCHOOL DISTRICT Inspector: Kevin Riley Date: 05/09/2024

Project Address: 1426 East Santa Clara Street Ventura, CA 93003

Client Name: VENTURA UNIFIED SCHOOL DISTRICT Contact # Ryan Hughes 805.901.9620

Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A24	**Roofing Materials**	G/D/SD	35x2	PLM	50/60 NG	NF
A25	**Roofing Materials**	G/D/SD		PLM		
A26	**Roofing Materials**	G/D/SD		PLM		
A27	**Roofing Materials**	G/D/SD		PLM		
A28	**Roofing Materials**	G/D/SD		PLM	50/60 NG	
A29	**Roofing Materials**	G/D/SD		PLM		
A30	**Roofing Materials**	G/D/SD		PLM		
	Roofing Materials	G/D/SD		PLM		
	Roofing Materials	G/D/SD		PLM		

Relinquished by: Kevin Riley CAC-175871 DATE: 5-28-24 TIME: 7p ☐Sent Via FedEx ☒Hand Delivered to Lab

Received by: Rachel Rangel (WI) DATE: 5/29/24 TIME: 10:25
Name (please print) Signature

Requested Analysis Circle one: 6 Hour

Page 4 of 11

OrderID: 322413415

#322413415

Environmental Testing Associates

CHAIN OF CUSTODY

L.A. TESTING
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361 Phone: 805.497.7499 Fax: 805.497.7477

Project Name: **Cabrillo Middle SCHOOL Roofing Project- VENTURA UNIFIED SCHOOL DISTRICT** Inspector: Kevin Riley Date: 05/09/2024

Project Address: 1426 East Santa Clara Street Ventura, CA 93003

Client Name: VENTURA UNIFIED SCHOOL DISTRICT Contact # Ryan Hughes 805.901.9620

Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A31	**Roofing Materials**	G/D/SD	3 in 2	PLM	70 UG	NF
A32	**Roofing Materials**	G/D/SD	↓	PLM	↓	↓
A33	**Roofing Materials**	G/D/SD	↓	PLM	↓	↓
A34	**Roofing Materials**	G/D/SD	↓	PLM	↓	↓
A35	**Roofing Materials**	G/D/SD	↓	PLM	↓	↓
	Roofing Materials	G/D/SD		PLM		
	Roofing Materials	G/D/SD		PLM		
	Roofing Materials	G/D/SD		PLM		
	Roofing Materials	G/D/SD		PLM		

Relinquished by: _____ DATE: _____ TIME: _____ ☐Sent Via FedEx ☐Hand Delivered to Lab

Kevin Riley CAC-17-5871

Received by: Rachel Rangel (WI) _____ DATE: 5/29/24 TIME: 10:25

Name (please print) Signature

Requested Analysis Circle one: 6 Hour

Page 1 of 11

OrderID: 322413415

#322413415

Environmental Testing Associates

CHAIN OF CUSTODY

L.A. TESTING
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361 Phone: 805.497.7499 Fax: 805.497.7477

Project Name: **Cabrillo Middle** SCHOOL Roofing Project- VENTURA UNIFIED SCHOOL DISTRICT Inspector: Kevin Riley Date: 05/09/2024

Project Address: 1426 East Santa Clara Street Ventura, CA 93003

Client Name: VENTURA UNIFIED SCHOOL DISTRICT Contact # Ryan Hughes 805.901.9620

Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A36	**Roofing Materials**	G/D/SD	75KB	PLM	Gym	NF
A37	**Roofing Materials**	G/D/SD		PLM		
A38	**Roofing Materials**	G/D/SD		PLM		
A39	**Roofing Materials**	G/D/SD		PLM		
A40	**Roofing Materials**	G/D/SD		PLM		
A41	**Roofing Materials**	G/D/SD		PLM		
A42	**Roofing Materials**	G/D/SD		PLM		
	Roofing Materials	G/D/SD		PLM		
	Roofing Materials	G/D/SD		PLM		

Relinquished by: Kevin Riley CAC-17-5871 DATE: 5/29/24 TIME: 4p ☑Sent Via FedEx ☐Hand Delivered to Lab

Received by: Rachel Rangel (WSI) (Name (please print)) (Signature) DATE: 5/29/24 TIME: 10:25

Requested Analysis Circle one: 6 Hour

Page 6 of 11

OrderID: 322413415

#322413415

CHAIN OF CUSTODY

Environmental Testing Associates

L.A. TESTING
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361 Phone: 805.497.7499 Fax: 805.497.7477

Project Name: **Cabrillo Middle** SCHOOL Roofing Project- VENTURA UNIFIED SCHOOL DISTRICT Inspector: Kevin Riley Date: 05/09/2024

Project Address: 1426 East Santa Clara Street Ventura, CA 93003

Client Name: VENTURA UNIFIED SCHOOL DISTRICT Contact # Ryan Hughes 805.901.9620

Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A-43	**Roofing Materials**	G/D/SD	5K VS	PLM	Cafeteria	NF
A-44	**Roofing Materials**	G/D/SD		PLM		
A-45	**Roofing Materials**	G/D/SD		PLM		
A-46	**Roofing Materials**	G/D/SD		PLM		
A-47	**Roofing Materials**	G/D/SD		PLM		
[redacted]	**Roofing Materials**	G/D/SD		PLM	[redacted]	
	Roofing Materials	G/D/SD		PLM		
	Roofing Materials	G/D/SD		PLM		
	Roofing Materials	G/D/SD		PLM		

Relinquished by: _____ DATE: 5-28-24 TIME: 4p ☒Sent Via FedEx ☐Hand Delivered to Lab
Kevin Riley CAC-17-5871

Received by: Rachel Rangel (WI) _____ DATE: 5/29/24 TIME: 10:35
Name (please print) Signature

Requested Analysis Circle one: 6 Hour

Page 7 of 11

OrderID: 322413415

#322413415

CHAIN OF CUSTODY

Environmental Testing Associates

L.A. TESTING
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361 Phone: 805.497.7499 Fax: 805.497.7477

Project Name: **Cabrillo Middle** SCHOOL Roofing Project- VENTURA UNIFIED SCHOOL DISTRICT Inspector: Kevin Riley Date: 05/09/2024

Project Address: 1426 East Santa Clara Street Ventura, CA 93003

Client Name: VENTURA UNIFIED SCHOOL DISTRICT Contact # Ryan Hughes 805.901.9620

Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A48	**Roofing Materials**	G/D/SD	7 5K A	PLM	3 HUP / MUSIC	NF
A49	**Roofing Materials**	G/D/SD		PLM		
A50	**Roofing Materials**	G/D/SD		PLM		
A51	**Roofing Materials**	G/D/SD		PLM		
A52	**Roofing Materials**	G/D/SD		PLM		
A53	**Roofing Materials**	G/D/SD		PLM		
A54	**Roofing Materials**	G/D/SD		PLM		
	Roofing Materials	G/D/SD		PLM		
	Roofing Materials	G/D/SD		PLM		

Relinquished by: _____ DATE: 5-28-24 TIME: _____ ☒Sent Via FedEx ☐Hand Delivered to Lab
Kevin Riley CAC-17-5871

Received by: Rachel Rangel (WSI) _____ DATE: 5/29/24 TIME: 10:25
Name (please print) Signature

Requested Analysis Circle one: 6 Hour

Page 8 of 11

OrderID: 322413415

#322413415

Environmental Testing Associates

CHAIN OF CUSTODY

L.A. TESTING
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361 Phone: 805.497.7499 Fax: 805.497.7477

Project Name: **Cabrillo Middle SCHOOL Roofing Project- VENTURA UNIFIED SCHOOL DISTRICT** Inspector: Kevin Riley Date: 05/09/2024

Project Address: 1426 East Santa Clara Street Ventura, CA 93003

Client Name: VENTURA UNIFIED SCHOOL DISTRICT Contact # Ryan Hughes 805.901.9620

Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A55	**Penetration Mastic**	G/D/SD	200 A	PLM	20 WG Roof	NF
A56	**Penetration Mastic**	G/D/SD	"	PLM	"	"
A57	**Penetration Mastic**	G/D/SD	"	PLM	"	"
A58	**Penetration Mastic**	G/D/SD	200 A	PLM	30 WG Roof	"
A59	**Penetration Mastic**	G/D/SD	"	PLM	"	"
A60	**Penetration Mastic**	G/D/SD	"	PLM	"	"
A61	**Penetration Mastic**	G/D/SD	200 A	PLM	40 WG / Lib	"
A62	**Penetration Mastic**	G/D/SD	"	PLM	"	"
A63	**Penetration Mastic**	G/D/SD	"	PLM	"	"

Relinquished by: _____ DATE: 5.28.24 TIME: 4P ☒Sent Via FedEx ☐Hand Delivered to Lab
Kevin Riley CAC-17-5871

Received by: Rachel Rangel (WI) _____ DATE: 5/29/24 TIME: 10:25
Name (please print) Signature

Requested Analysis Circle one: 6 Hour

Page 9 of 11

OrderID: 322413415

#322413415

Environmental Testing Associates

CHAIN OF CUSTODY

L.A. TESTING
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361 Phone: 805.497.7499 Fax: 805.497.7477

Project Name: **Cabrillo Middle** SCHOOL Roofing Project- VENTURA UNIFIED SCHOOL DISTRICT Inspector: Kevin Riley Date: 05/09/2024

Project Address: 1426 East Santa Clara Street Ventura, CA 93003

Client Name: VENTURA UNIFIED SCHOOL DISTRICT Contact # Ryan Hughes 805.901.9620

Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A64	**Penetration Mastic**	G/D/SD	200 #	PLM	50/60	NF
A65	**Penetration Mastic**	G/D/SD	"	PLM	"	"
A66	**Penetration Mastic**	G/D/SD	"	PLM	"	"
A67	**Penetration Mastic**	G/D/SD	200 #	PLM	70	"
A68	**Penetration Mastic**	G/D/SD	"	PLM	"	"
A69	**Penetration Mastic**	G/D/SD	"	PLM	"	"
A70	**Penetration Mastic**	G/D/SD	200 #	PLM	Gym	"
A71	**Penetration Mastic**	G/D/SD	"	PLM	"	"
A72	**Penetration Mastic**	G/D/SD	"	PLM	"	"

Relinquished by: _____ DATE: 5-20-24 TIME: 5 PM ☒Sent Via FedEx ☐Hand Delivered to Lab
Kevin Riley CAC-17-5871

Received by: Rachel Rangel (AOI) _____ DATE: 5/29/24 TIME: 10:25
Name (please print) Signature

Requested Analysis Circle one: 6 Hour

Page 10 of 11

OrderID: 322413415

#322413415

CHAIN OF CUSTODY

Environmental Testing Associates

L.A. TESTING
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361 Phone: 805.497.7499 Fax: 805.497.7477

Project Name: **Cabrillo Middle** SCHOOL Roofing Project- VENTURA UNIFIED SCHOOL DISTRICT Inspector: Kevin Riley Date: 05/09/2024

Project Address: 1426 East Santa Clara Street Ventura, CA 93003

Client Name: VENTURA UNIFIED SCHOOL DISTRICT Contact # Ryan Hughes 805.901.9620

Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A73	**Penetration Mastic**	G/D/SD		PLM	ADMIN	
A74	**Penetration Mastic**	G/D/SD		PLM	"	
A75	**Penetration Mastic**	G/D/SD		PLM	"	
A76	**Penetration Mastic**	G/D/SD		PLM	CAFETERIA	
A77	**Penetration Mastic**	G/D/SD		PLM	"	
A78	**Penetration Mastic**	G/D/SD		PLM	"	
A79	**Penetration Mastic**	G/D/SD		PLM	MUSIC / LINDA'S	
A80	**Penetration Mastic**	G/D/SD		PLM	"	
A81	**Penetration Mastic**	G/D/SD		PLM		


Relinquished by: _____ DATE: 5/28/24 TIME: 4p ☒Sent Via FedEx ☐Hand Delivered to Lab
Kevin Riley CAC-17-5871

Received by: Rachel Rangel (WR) _____ DATE: 5/29/24 TIME: 8:10:25
Name (please print) Signature

Requested Analysis Circle one: 6 Hour

Page 11 of 11

OrderID: 322413415

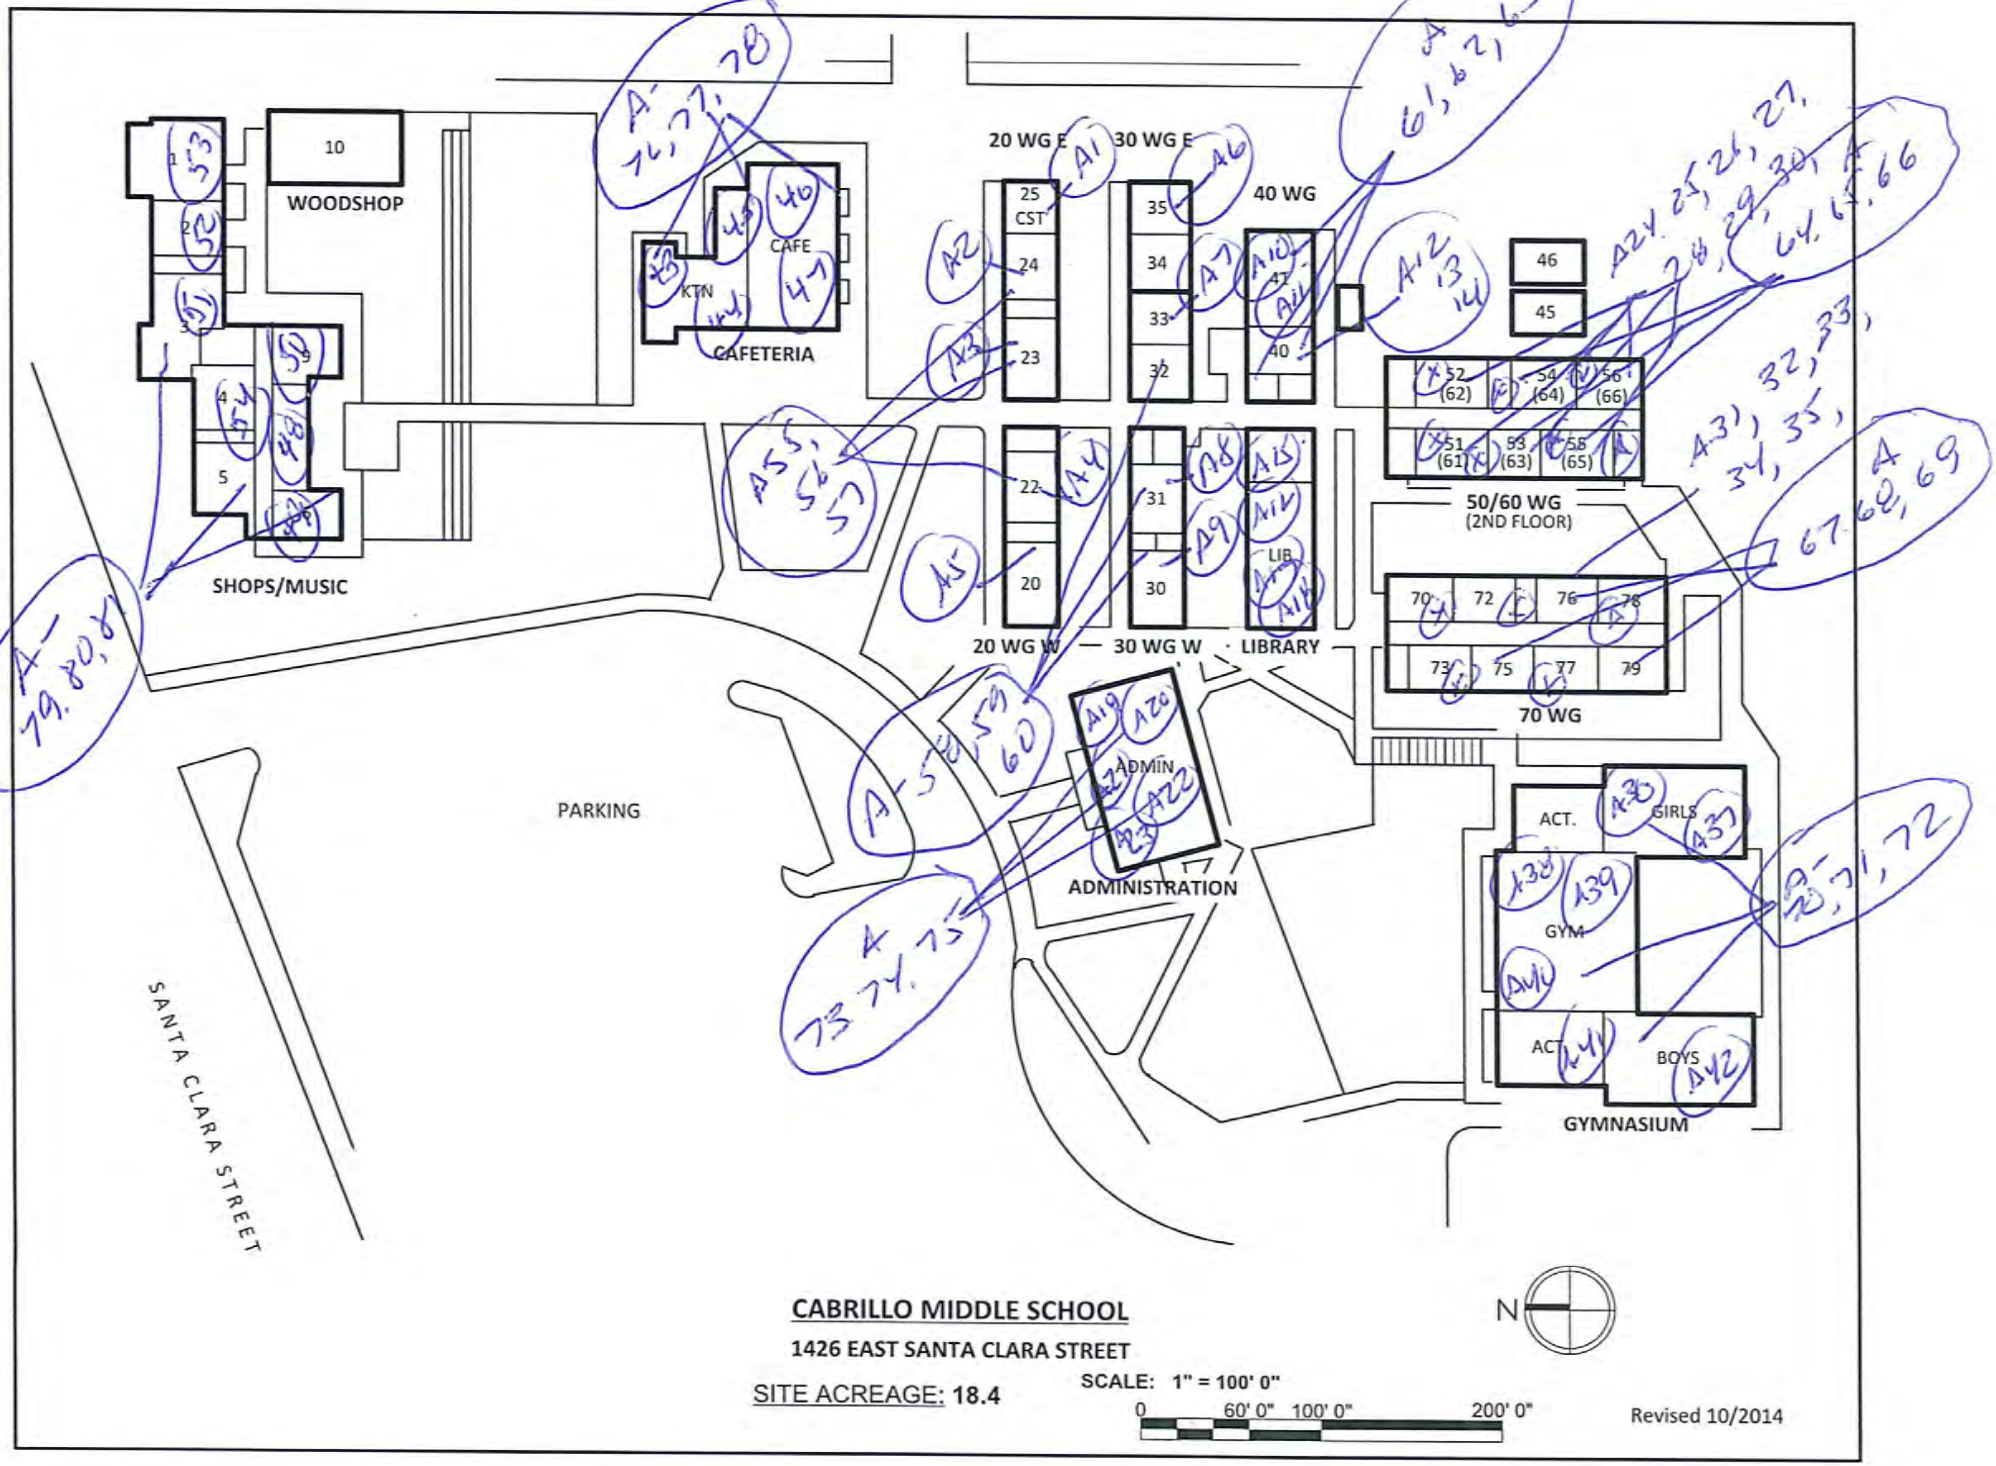

CABRILLO MIDDLE SCHOOL

1426 EAST SANTA CLARA STREET

SITE ACREAGE: **18.4**

SCALE: **1" = 100' 0"**

Revised 10/2014
















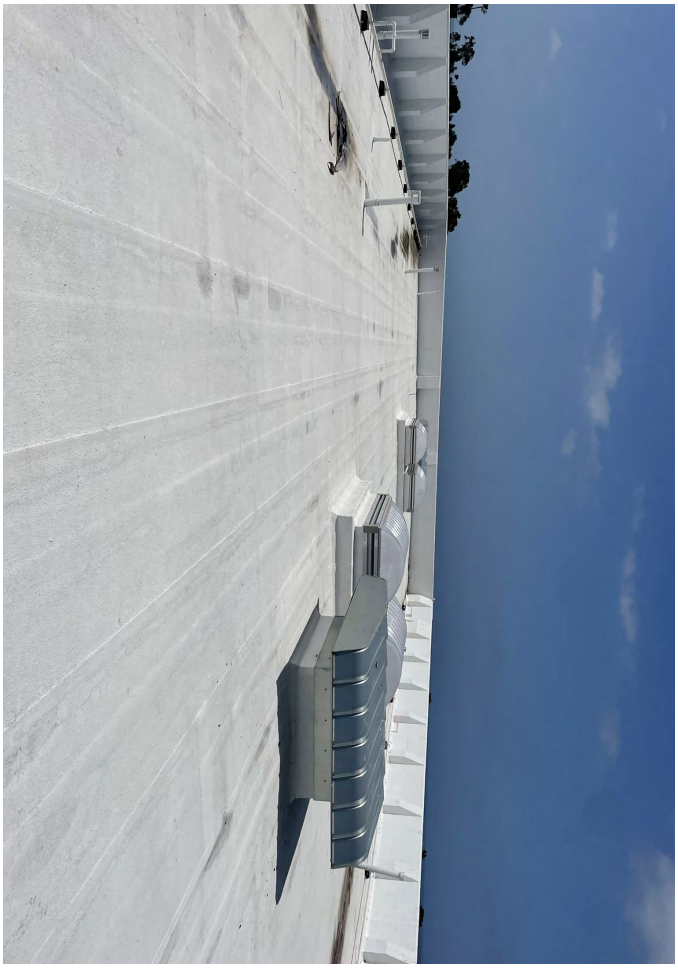
















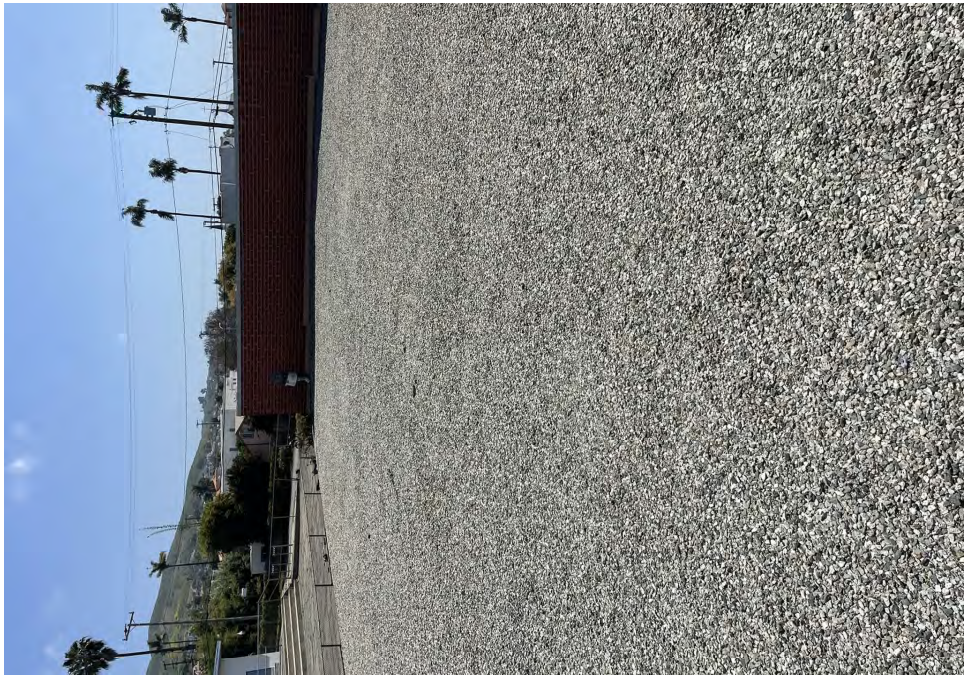









State of California
Division of Occupational Safety and Health
Certified Asbestos Consultant

Kevin R Riley
Name



Certification No. **17-5871**

Expires on **02/15/25**

This certification was issued by the Division of Occupational Safety and Health as authorized by Sections 7180 et seq. of the Business and Professions Code.