

Prepared for:

Kyrene Elementary School District No. 28
8700 South Kyrene Road
Tempe, Arizona 85284

**AHERA ASBESTOS
INSPECTION REPORT**

FOR

**KYRENE APRENDE MIDDLE SCHOOL
777 NORTH DESERT BREEZE BLVD.,
CHANDLER, ARIZONA 85226**

PURCHASE ORDER NO. 251702

Prepared by:



DOMINION

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue, Building 7
Phoenix, Arizona 85027
(623) 516-1415

Dominion Project Number: AZ1418.55

AHERA Re-Inspection Date: July 2, 2025

TABLE OF CONTENTS

LIMITATIONS	SECTION 1
INSPECTION PROCESS	SECTION 2
EXECUTIVE SUMMARY	SECTION 3
SITE PLANS	SECTION 4
HOMOGENEOUS MATERIALS INVENTORY LISTS	SECTION 5
PLM BULK SAMPLE SHEETS	SECTION 6
PLM BULK SAMPLE LOCATION MAPS.....	SECTION 7
PHYSICAL ASSESSMENT INFORMATION SHEETS	SECTION 8
LABORATORY REPORTS	SECTION 9
ASSUMED ACBM LOCATION MAPS.....	SECTION 10
INSPECTOR ACCREDITATION	SECTION 11
LABORATORY ACCREDITATION.....	SECTION 12

SECTION 1



LIMITATIONS

LIMITATIONS

The conclusions and results contained herein are based solely on the information presented in this report. The sampling, testing, and observations described in the report represent conditions only at the specified times and locations. Additional materials or information which were hidden, undiscovered, inaccessible, or not a part of the findings presented herein, would result in the modification of the conclusions and recommendations made herein. Any response action guidelines are based solely on the findings contained herein. The response action guidelines are presented as a courtesy and are not to be considered a complete or detailed set of specifications. Dominion performed this survey as directed by the client and in compliance with applicable regulations.

Dominion is not responsible for the accuracy of information provided by others, or for conditions or consequences arising from relevant facts that were withheld, concealed, undiscovered, or not fully disclosed. Dominion is not a law firm, and therefore, makes no representations regarding any potential liability of any person or entity for site conditions. Further, Dominion is not qualified to present medical advice. If any present or future health issues are in question, it is recommended that the findings in this report be presented to a qualified medical professional for evaluation.

SECTION 2



INSPECTION PROCESS

INSPECTION PROCESS

The Environmental Protection Agency (EPA) in 40 CFR 763, the Asbestos Hazard Emergency Response Act (AHERA), requires Local Education Agencies (LEAs) to identify friable and non-friable asbestos-containing building material (ACBM) in public and private elementary and secondary schools by visually inspecting school buildings for such materials and by sampling all identified suspect materials if they are not assumed to be ACBM. Those samples are then to be analyzed using appropriate analysis techniques, by a qualified laboratory, as referred to in the regulations. AHERA requires LEAs to only utilize accredited personnel when conducting inspections, re-inspections, developing management plans, or performing response actions. This regulation also includes record-keeping requirements. LEAs may contractually delegate their duties under this rule, but they remain responsible for the proper performance of those duties. LEAs are encouraged to consult with EPA Regional Asbestos Coordinators, or if applicable a State's lead agency designated by the State Governor, for assistance in complying with this rule.

This report complies with AHERA based protocols outlined in 40 CFR 763.85, specifically:

- The campus was visually inspected to identify the locations of all suspected ACBM.
- All suspect materials were touched to determine friability and condition.
- Bulk samples were collected of all homogeneous areas of friable suspected ACBM and all homogeneous areas of non-friable suspected ACBM.
- The date of the inspection, the name and signature of the person making the inspection, State of accreditation, his or her accreditation number and any changes in the condition of known or assumed ACBM are included in this report, if applicable.
- The exact locations where samples were collected during the inspection are marked, as well as a description of the manner used to determine sampling locations, the name and signature of each accredited inspector who collected the samples, State of accreditation and if applicable, his or her accreditation number.
- Also included within the report are any assessments or reassessments made of friable material, the name and signature of the accredited inspector making the assessments, State of accreditation and if applicable, his or her accreditation number.

The sampling protocol outlined in 40 CFR 763.86 is as follows:

Surfacing material is material in a school building that is sprayed-on, troweled-on, or otherwise applied to surfaces, such as acoustical plaster on ceilings and fireproofing materials on structural members, or other materials on surfaces for acoustical, fireproofing, or other purposes. Surfacing materials are collected in a statistically random manner as follows:

- At least three (3) bulk samples shall be collected from each homogeneous area that is one thousand (1,000) square feet.

- At least five (5) bulk samples shall be collected from each homogeneous area that is greater than one thousand (1,000) square feet but less than or equal to five thousand (5,000) square feet.
- At least seven (7) bulk samples shall be collected from each homogeneous area that is greater than five thousand (5,000) square feet.

Thermal system insulation (TSI) in a school building means materials applied to pipes, fittings, boilers, breeching, tanks, ducts, or other interior structural components to prevent heat loss or gain, or water condensation, or for other purposes. TSI samples are collected in a randomly distributed manner as follows:

- A minimum of three (3) bulk samples are collected from each homogeneous area of TSI that is not assumed to be ACBM.
- Collect at least one (1) bulk sample from each homogeneous area of patched TSI that is not assumed to be ACBM if the patched section is less than six (6) linear or square feet.
- In a manner sufficient to determine whether the material is ACBM or not ACBM, collect bulk samples from each insulated mechanical system that is not assumed to be ACBM where cement or plaster is used on fittings such as tees, elbows, or valves.
- Bulk samples are not required to be collected from any homogeneous area where the accredited inspector has determined that the TSI is fiberglass, foam glass, rubber, or other non-ACBM.

Miscellaneous material is sampled in a manner sufficient to determine whether the material is ACBM or not ACBM. An accredited inspector shall collect bulk samples from each homogeneous area of friable miscellaneous material that is not “assumed” to be ACBM. Therefore, Dominion will collect a minimum of three (3) samples of each miscellaneous material, as a matter of industry standards.

ASSESSMENT OF MATERIALS

In compliance with 40 CFR 763.88, Dominion inspectors have classified the ACBM and suspected ACBM in the school buildings into one of the following categories:

- (1) Damaged or significantly damaged Thermal System Insulation ACBM
- (2) Damaged friable surfacing ACBM
- (3) Significantly damaged friable surfacing ACBM
- (4) Damaged or significantly damaged friable miscellaneous ACBM
- (5) ACBM with potential for damage
- (6) ACBM with potential for significant damage
- (7) Any remaining friable ACBM or friable suspected ACBM

As part of the assessment, the following issues have been taken into consideration:

- i. Location and the amount of the material, both in total quantity and as a percentage of the functional space.
- ii. The type of damage or significant damage (e.g., flaking, blistering, water damage, or other signs of physical damage).
- iii. The severity of damage (e.g., major flaking, severely torn jackets, as opposed to occasional flaking, minor tears to jackets).
- iv. Extent or spread of damage over large areas or large percentages of the homogeneous area.
- v. Whether the material is accessible.
- vi. The material's potential for disturbance.
- vii. Known or suspected causes of damage or significant damage (e.g., air erosion, vandalism, vibration, water).
- viii. Preventive measures might eliminate the reasonable likelihood of undamaged ACBM from becoming significantly damaged.

SECTION 3



EXECUTIVE SUMMARY

EXECUTIVE SUMMARY

INTRODUCTION

Dominion Environmental Consultants, Inc. (Dominion) was authorized, by Mr. Mason Meade with the Kyrene Elementary School District (KESD), to perform the Initial AHERA Asbestos Inspection of Kyrene Aprende Middle School, located at 777 North Desert Breeze Blvd E in Chandler, Arizona, via a written Purchase Order #251702, dated July 2, 2025.

Due to budgetary constraints, Dominion was directed by Mr. Meade to first sample the accessible building materials inside the building until a pre-determined number of samples were collected. Once the allotted number of samples per building had been collected, Dominion was then directed to "assume as asbestos-containing" the remaining suspect building materials. Pursuant to Mr. Meade's directions, the sampling order of importance was determined first on materials with the largest square footage, then least accessible materials, ceramic tiles, and materials least likely to be disturbed.

Dominion was also instructed to utilize Dominions pervious Limited Asbestos Reports, Project Numbers AZ0959.2613, dated November 30, 2020, AZ1418.14 dated March 6, 2024, and AZ1418.11 dated March 13, 2024. Per the direction of Mr. Meade, Dominion was instructed to utilize the information from these previous reports and to only collect additional bulk samples of any previously unsampled building materials.

Kyrene Aprende Middle School campus consists of three (3) single stories, slab on grade, block structures. No below grade levels were observed for any building on campus.

BACKGROUND INFORMATION

INITIAL LIMITED AHERA ASBESTOS SURVEY – NOVEMBER 2020

Dominions Limited Asbestos Inspections of the Kyrene Aprende Hallway, Storage, and Boy's Restroom of the Main Building was conducted on November 30, 2020, by Mr. Nick Marcos, an AHERA accredited Asbestos Building Inspector (ON-4644-8873-040320).

LIMITED AHERA ASBESTOS SURVEY – MARCH 2024

Dominions Limited Asbestos Inspections of the Kyrene Aprende Kitchen of the Multipurpose Building was conducted on March 6, 2024, by Ms. Tracey Carpenter, an AHERA accredited Asbestos Building Inspector (ON-4644-14588-090523).

LIMITED AHERA ASBESTOS SURVEY – MARCH 2024

Dominions Limited Asbestos Inspections of the Kyrene Aprende Media Center Building was conducted on March 13, 2024, by Mr. Xin Lou, an AHERA accredited Asbestos Building Inspector (ON-4644-548-092323).

AHERA ASBESTOS REINSPECTION – JULY 2025

Dominions Limited Asbestos Inspections of the Kyrene Aprende Campus was conducted on July 2, 2025, by Mr. Isai Portillo, an AHERA accredited Asbestos Building Inspector (ON-188748-19438-121224).

COLLECTION OF BULK SAMPLES

Initial Limited AHERA Asbestos Survey – NOVEMBER 2020

A total of twenty-four (24) bulk samples were collected from fourteen (14) homogeneous building materials within the Kyrene Aprende Hallway, Storage, and Boy's Restroom of the Main Building.

Identified in the following list are the fourteen (14) suspect homogeneous building materials sampled during the November 30, 2020, limited asbestos inspection.

Main Building - Kitchen Office – 14 Materials – 0 ACBM

- Orange Peel Texture Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)
- Blue Cove Base
- White Mastic for Cove Base
- Gray Cove Base
- Tan Mastic for Cove Base
- Gray 4" x 4" Ceramic Wall Tile
- Tan Mastic for 4" x 4" Ceramic Wall Tile
- Tan Grout for 4" x 4" Ceramic Wall Tile
- Cream 4" x 4" Ceramic Wall Tile
- Blue 4" x 4" Ceramic Cove Base Tile
- Greenboard for Ceramic Wall Tiles
- Tan Mastic for Greenboard
- Tan/Green Paper for Greenboard
- Pink Wall Insulation

Limited AHERA Asbestos Survey – MARCH 2024

A total of seventy-five (75) bulk samples were collected from forty-one (41) homogeneous building materials within the Kyrene Aprende Kitchen of the Multipurpose Building.

Identified in the following list are the forty-one (41) suspect homogeneous building materials sampled during the March 6, 2024, limited asbestos inspection.

Multipurpose Building - 41 Materials – 0 ACBM

- Gray 12" x 12" Ceramic Floor Tile

- Yellow Mastic for Gray 12" x 12" Ceramic Floor Tile
- Gray Grout
- Gray Ceramic Base Tile
- Yellow Mastic for Gray Ceramic Base Tile
- Gray Grout
- Gray Cove Base
- Yellow Mastic for Gray Cove Base
- Black Cove Base
- Cream Mastic for Black Cove Base
- White Fiberglass Reinforced Plastic (FRP)
- Tan Mastic for FRP
- Cream Mastic for FRP
- White Counter Caulking
- Orange Peel Texture Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)
- Beige 12" x 12" VCT
- Yellow Mastic for Beige 12" x 12" VCT
- Blue Cove Base
- Yellow Mastic for Blue Cove Base
- White Window Frame Caulking
- White Paint for Window Frame Caulking
- Black Window Glazing
- White Door Frame Caulking
- White Paint for Door Frame Caulking
- White Fixture Caulking
- White 4" x 4" Ceramic Wall Tile
- Yellow Mastic for White 4" x 4" Wall Tile
- Gray 4" x 4" Ceramic Wall Tile
- Yellow Mastic for Gray 4" x 4" Wall Tile
- Tan 4" x 4" Ceramic Wall Tile
- White Mastic for Tan 4" x 4" Ceramic Wall Tile
- Mortar for Tan 4" x 4" Ceramic Wall Tile
- Blue 4" x 4" Ceramic Wall Tile
- Tan Grout
- Gray 2" x 2" Ceramic Floor Tile
- Yellow Mastic for Gray 2" x 2" Floor Tile
- Gray Grout
- 2" x 2" Ceiling Tile
- 2" x 2" Ceiling Tile
- Silver Duct Wrap
- Yellow Insulation for Silver Duct Wrap

Limited AHERA Asbestos Survey – MARCH 2024

A total of twelve (12) bulk samples were collected from nine (9) homogeneous building materials within the Kyrene Aprende Media Center Building.

Identified in the following list are the nine (9) suspect homogeneous building materials sampled during March 13, 2024, limited asbestos inspection.

Media Center Building - 9 Materials – 0 ACBM

- Blue Cove Base
- Tan Mastic for Blue Cove Base
- Blue Cove Base Tile
- Gray Grout for Blue Cove Base Tile
- Tan Mastic for Blue Cove Base Tile
- Gray 2" x 2" RR Floor Tile
- Grout for Gray 2" x 2" RR Floor Tile
- Mastic for Gray 2" x 2" RR Floor Tile
- Orange Peel Drywall System - Paint
- Tan Mastic
- White Compound
- White Drywall with Brown Paper

AHERA ASBESTOS REINSPECTION – JULY 2025

A total of seventy-three (73) bulk samples were collected from thirty-seven (37) homogeneous building materials within the Kyrene Aprende Media Center Building.

Identified in the following list are the thirty-seven (37) suspect homogeneous building materials sampled during the July 2, 2025, limited asbestos inspection.

Main Building - Kitchen Office – 14 Materials – 0 ACBM

- White 2' x 2' Ceiling Tile
- Replacement 2' x 2' Ceiling Tile
- Black Window Sealant
- Blue 4" Cove Base
- Cream Mastic for Blue 4" Cove Base
- Blue/Gray 2' x 2' Carpet
- Yellow Mastic for Blue/Gray 2' x 2' Carpet
- Beige w/ Tan Specks 12" x 12" VCT
- Yellow Mastic for Beige w/ Tan Specks 12" x 12" VCT
- Gray Sink Coating
- Tac Board Wrap
- Semi-Transparent Mastic for Tac Board Wrap

- Gray 2" x 2" Ceramic Floor Tile
- Gray Grout for Gray 2" x 2" Ceramic Floor Tile

Media Center Building - 12 Materials – 0 ACBM

- White 2' x 2' Ceiling Tile (Old)
- White 2' x 2' Ceiling Tile (New)
- White Smooth 2' x 2' Ceiling Tile
- White Textured 2' x 2' Ceiling Tile
- Beige w/ Tan Specks 12" x 12" VCT
- Mastic for Beige w/ Tan Specks 12" x 12" VCT
- Blue 4" Cove Base
- Tan Mastic for Blue 4" Cove Base
- Light Brown Mastic for Blue 4" Cove Base
- Blue/Gray 2' x 2' Carpet
- Tan/Green Mastic for Blue/Gray 2' x 2' Carpet
- Black Window Sealant

Multipurpose Building - 11 Materials – 0 ACBM

- White 2' x 2' Ceiling Tile (Old)
- White 2' x 2' Ceiling Tile (New)
- White Smooth 2' x 2' Ceiling Tile
- Beige w/ Tan Specks 12" x 12" VCT
- Tan Mastic for 12" x 12" VCT
- Blue 4" Cove Base
- Tan Mastic for Blue 4" Cove Base
- Blue/Gray 2' x 2' Carpet
- Brown Mastic for Multicolored Carpet
- White Fixture Caulking
- Brown Frame Sealant

All the suspect bulk samples collected from Kyrene Aprende Middle School were submitted to EMLab P&K (EMLab) in Phoenix, Arizona for analysis using Polarized Light Microscopy (PLM) methods. EMLab used the methods prescribed in Method 40 CFR, Part 763, in the Code of Federal Register in analyzing bulk samples. EMLab is certified by the National *Institute of Standards and Technology* as a National Voluntary Laboratory Accreditation Program (NVLAP), Number 500031-0. The suspect asbestos bulk samples were collected and submitted to the laboratory using established chain-of-custody procedures.

Bulk samples were collected utilizing safety and health practices as required by the Occupational Safety and Health Administration (OSHA). At the time of sample collection, the buildings were not occupied by students. Only limited administrative and custodial staff were present on campus

ASSUMED ACBM – July 2, 2025

Due to budgetary constraints, KESD instructed Dominion to assume any unsampled suspect building materials as asbestos containing until further asbestos bulk sampling can be budgeted and conducted. Therefore, listed below are the one hundred and sixty-six (166) building materials that were **assumed** to contain greater than one percent (>1%) asbestos.

Main Building – 51 Assumed ACBM

- Frame Caulking
- Door/Window Sealant
- Grout for 9" x 9" Block
- Counter Caulking
- Off-White 4" x 4" Ceramic Wall Tile
- Grout for Off-White 4" x 4" Ceramic Wall Tile
- Black 4" x 4" Ceramic Wall Tile
- Grout for Black 4" x 4" Ceramic Wall Tile
- Mastic for Black 4" x 4" Ceramic Wall Tile
- Gray 4" x 4" Ceramic Wall Tile
- Grout for Gray 4" x 4" Ceramic Wall Tile
- Mastic for Gray 4" x 4" Ceramic Wall Tile
- Navy Blue 4" x 4" Ceramic Cove Base
- Grout for Navy Blue 4" x 4" Ceramic Cove Base
- Mastic for Navy Blue 4" x 4" Ceramic Cove Base
- 2" x 2" Gray Ceramic Floor Tile
- Grout for 2" x 2" Gray Ceramic Floor Tile
- Thinset for 2" x 2" Gray Ceramic Floor Tile
- Fixture Caulking
- Beige and Black Epoxy Flooring
- Concrete Foundation
- Concrete Pad
- Smooth Drywall System
- Brown Door Sealant
- Brown Block
- Mortar for Brown Block
- Brown Interior Expansion Joint
- Fiberglass Reinforced Plastic (FRP)
- Mastic for Fiberglass Reinforced Plastic (FRP)
- Gray Transite Panel
- Gray 12" x 12" Ceramic Floor Tile
- Grout for Gray 12" x 12" Ceramic Floor Tile
- Thinset Gray 12" x 12" Ceramic Floor Tile
- Mop Sink Caulking
- 4" x 4" White Ceramic Wall Tile

- Grout for 4" x 4" White Ceramic Wall Tile
- Mastic for 4" x 4" White Ceramic Wall Tile
- Gray Wallpaper
- Untextured Drywall System
- Red Fire Stop Caulking
- Gray Duct Mastic
- Silver Duct Wrap
- Insulation for Silver Duct Wrap
- Silver Flex Duct Wrap
- Insulation for Silver Flex Duct Wrap
- Silver Ceiling Wrap
- Insulation for Silver Ceiling Wrap
- White Pipe Wrap
- Insulation for White Pipe Wrap
- Blue 2" x 2" Carpet
- Mastic for Blue 2" x 2" Carpet

Media Center Building – 54 Assumed ACBM

- Concrete Foundation
- Floor Expansion Joint
- Tac Board Wrap
- Mastic for Tac Board Wrap
- Frame Caulking
- Gray 2" x 2" Ceramic Floor Tile
- Grout for Gray 2" x 2" Ceramic Floor Tile
- Thinset for Gray 2" x 2" Ceramic Floor Tile
- White 4" x 4" Ceramic Wall Tile
- Mastic for White 4" x 4" Ceramic Wall Tile
- Grout for White 4" x 4" Ceramic Wall Tile
- Gray 4" x 4" Ceramic Wall Tile
- Mastic for Gray 4" x 4" Ceramic Wall Tile
- Grout for Gray 4" x 4" Ceramic Wall Tile
- Black 4" x 4" Ceramic Wall Tile
- Mastic for Black 4" x 4" Ceramic Wall Tile
- Grout for Black 4" x 4" Ceramic Wall Tile
- Blue 4" x 4" Ceramic Cove Base Tile
- Grout for Blue 4" x 4" Ceramic Cove Base Tile
- Mastic for Blue 4" x 4" Ceramic Cove Base Tile
- Counter/Cabinet Caulking
- Fixture Caulking
- Blue 2" x 2" Carpet
- Mastic for Blue 2" x 2" Carpet

- Blue/Gray 2" x 2" Carpet
- Mastic for Blue/Gray 2" x 2" Carpet
- Clear Block 9" x 9" Grout
- Black Cove Base
- Mastic for Black Cove Base
- Gray Cove Base
- Mastic for Gray Cove Base
- Concrete Pad
- Smooth Texture Drywall System
- Gray Sink Coating
- Black Chalk Board
- Off-White/Gray Spec 12" x 12" VCT
- Mastic for Off-White/Gray Spec 12" x 12" VCT
- Brown CMU Block
- Mortar for CMU Block
- Brown Decorative Block
- Mortar for Brown Decorative Block
- Brown 16" x 3" CMU Block
- Mortar for Brown 16" x 3" CMU Block
- Untextured Drywall System
- Ceiling Wrap Backing
- Insulation for Ceiling Wrap Backing
- Gray Duct Mastic
- Silver Flex Duct Wrap
- Insulation for Silver Flex Duct Wrap
- Silver Duct Wrap
- Insulation for Silver Duct Wrap
- Pipe Wrap
- Insulation for Pipe Wrap
- Red Fire Stop Caulking

Multipurpose Building – 51 Assumed ACBM

- Interior Frame Caulking
- White Frame Caulking
- 9" x 9" Block Grout
- Gray 3" x 6" Ceramic Cove Base
- Mastic for Gray 3" x 6" Cove Base
- Grout for 3" x 6" Cove Base
- Gray 12" x 12" Ceramic Floor Tile
- Mastic for 12" x 12" Floor Tile
- Grout for 12" x 12" Floor Tile
- FRP

- Mastic for FRP
- 4" Brown Cove Base
- Mastic for 4" Brown Cove Base
- 6" Gray Cove Base
- Mastic for 6" Gray Cove Base
- 6" x 6" Ceramic Cove Base
- Mastic for 6" x 6" Ceramic Cove Base
- Black 4" Cove Base
- Mastic for Black 4" Cove Base
- Blue Carpet
- Mastic for Blue Carpet
- Blue 2" x 2" Carpet
- Mastic for 2" x 2" Carpet
- Tac Board Wrap
- Mastic for Tac Board Wrap
- Concrete Foundation
- Off- White 4" x 4" Ceramic Wall Tile
- Grout for 4" x 4" Ceramic Wall Tile
- Thinset for 4" x 4" Ceramic Wall Tile
- Black 4" x 4" Ceramic Wall Tile
- Grout for 4" x 4" Ceramic Wall Tile
- Thinset for 4" x 4" Ceramic Wall Tile
- Navy Blue 4" Ceramic Cove Base
- Grout for Navy Blue 4" Cove Base
- Gray/Blue 2" x 2" Carpet
- Mastic for 2" x 2" Carpet
- Black Flooring
- Mastic for Black Flooring
- Brown Expansion Joint
- L Shape Cove Base
- Mastic for L Shape Cove Base
- 4" Gray Cove Base
- Mastic for 4" Cove Base
- Silver Backing
- Insulation for Silver Backing
- Beige 4" x 4" Ceramic Wall Tile
- Grout for Beige 4" x 4" Ceramic Wall Tile
- Gray Carpet
- Mastic for Gray Carpet
- Brown 16" x 3" CMU
- Mortar for 16" x 3" CMU
- Gray Sink Caulking
- Black Floor Coating

- White Seam Tape
- Mastic for Seam Tape
- Gray Duct Mastic
- Silver Flex Duct Wrap
- Insulation for Silver Flex Duct Wrap
- Red Fire Stop Caulking
- Pipe Wrap
- Insulation for Pipe Wrap

INSPECTION FINDINGS

INITIAL LIMITED AHERA ASBESTOS SURVEY – November 30, 2020

All fourteen (14) of the homogeneous building materials sampled during the November 2020 inspection within the Main Building were reported by the laboratory using the PLM analysis method to be “none detected for asbestos content.”

LIMITED AHERA ASBESTOS SURVEY – March 6, 2024

All forty-one (41) of the homogeneous building materials sampled during the March 2024 inspection within the Kitchen of the Multipurpose Building were reported by the laboratory using the PLM analysis method to be “none detected for asbestos content.”

LIMITED AHERA ASBESTOS SURVEY – March 13, 2024

The nine (9) homogeneous building materials sampled during the March 2024 inspection within the Media Center were reported by the laboratory using the PLM analysis method to be “none detected for asbestos content.”

2025 AHERA ASBESTOS RE-INSPECTION – July 2, 2025

All thirty-seven (37) of the homogeneous building materials sampled during the July 2025 inspection within the campus were reported by the laboratory using the PLM analysis method to be “none detected for asbestos content.”

As shown above, one hundred and sixty-six (166) suspect homogeneous building materials were *assumed* to contain greater than one percent (>1%) asbestos.

RECOMMENDATIONS

Any building material within the Kyrene Aprende Middle School campus not identified in this inspection report that is not wood, glass, or metal, is a suspect ACBM and should not be removed, sanded, ground, abraded, or otherwise disturbed by any person without being first properly trained as per 40 CFR 763.92 and, or 29 CFR 1926.1101. For detailed

recommendations, please refer to the Kyrene Aprende Middle School AHERA Management Plan.

The ACBM or assumed ACBM located within the structures of the Kyrene Aprende Middle School campus can be managed in compliance with the Kyrene Elementary School District AHERA Management Plan until such a time as these building materials become degraded, have become friable, or will be disturbed by ongoing maintenance, renovation, or a demolition activity. Prior to a renovation or demolition activity, the previously listed assumed ACBM should be sampled by an AHERA Certified Building Inspector to determine the presence of asbestos.

At least once every six (6) months after a management plan is in effect, the KESD should conduct periodic surveillance in each building that it leases, owns, or otherwise uses as a school building that contains ACBM.

At least once every three (3) years after a management plan is in effect, the KESD should conduct an inspection of all ACBM on the school campus.

The AHERA inspection is limited to only the interior of the buildings and the underside of any covered walkways. This would mean that the additional suspect building materials found on the exterior of the buildings or structures, that are not regulated by AHERA are regulated by EPA NESHAP and OSHA. Therefore, prior to any disturbance of these un-sampled or newly installed suspect building materials, Dominion recommends that these suspect materials be sampled by an AHERA Certified Building Inspector and analyzed for asbestos content by a qualified laboratory prior to any disturbance.

The property owner or his representatives should retain the services of an independent asbestos consulting firm to monitor the performance of any asbestos abatement activities. The consulting firm should oversee the completeness of any asbestos removal and verify the quality of the air during the removal work and perform final clearance air sampling in accordance with the AHERA guidelines.

All documentation is being provided to the Kyrene Elementary School District and must be retained as a permanent record. Should you have any questions regarding the procedures that were followed on this project, please contact Dominion at any time. Thank you for the opportunity to provide these environmental consulting services.



2025 AHERA Building Inspector

Isai Portillo

AHERA Certificate Number: ON-188748-19438-121224

Expires: December 12, 2025

Historical Information:

2024 AHERA Building Inspector

Tracey Carpenter

AHERA Certificate Number: ON-4644-14588-090523

Expires: August 6, 2025

2024 AHERA Building Inspector

Xin Lou

AHERA Certificate Number: ON-4644-548-092323

Expires: September 23, 2025

2020 AHERA Building Inspector

Nick Marcos



AHERA Certificate Number: ON-4644-8873-040320

Expires: April 3, 2020

SECTION 4



SITE PLANS


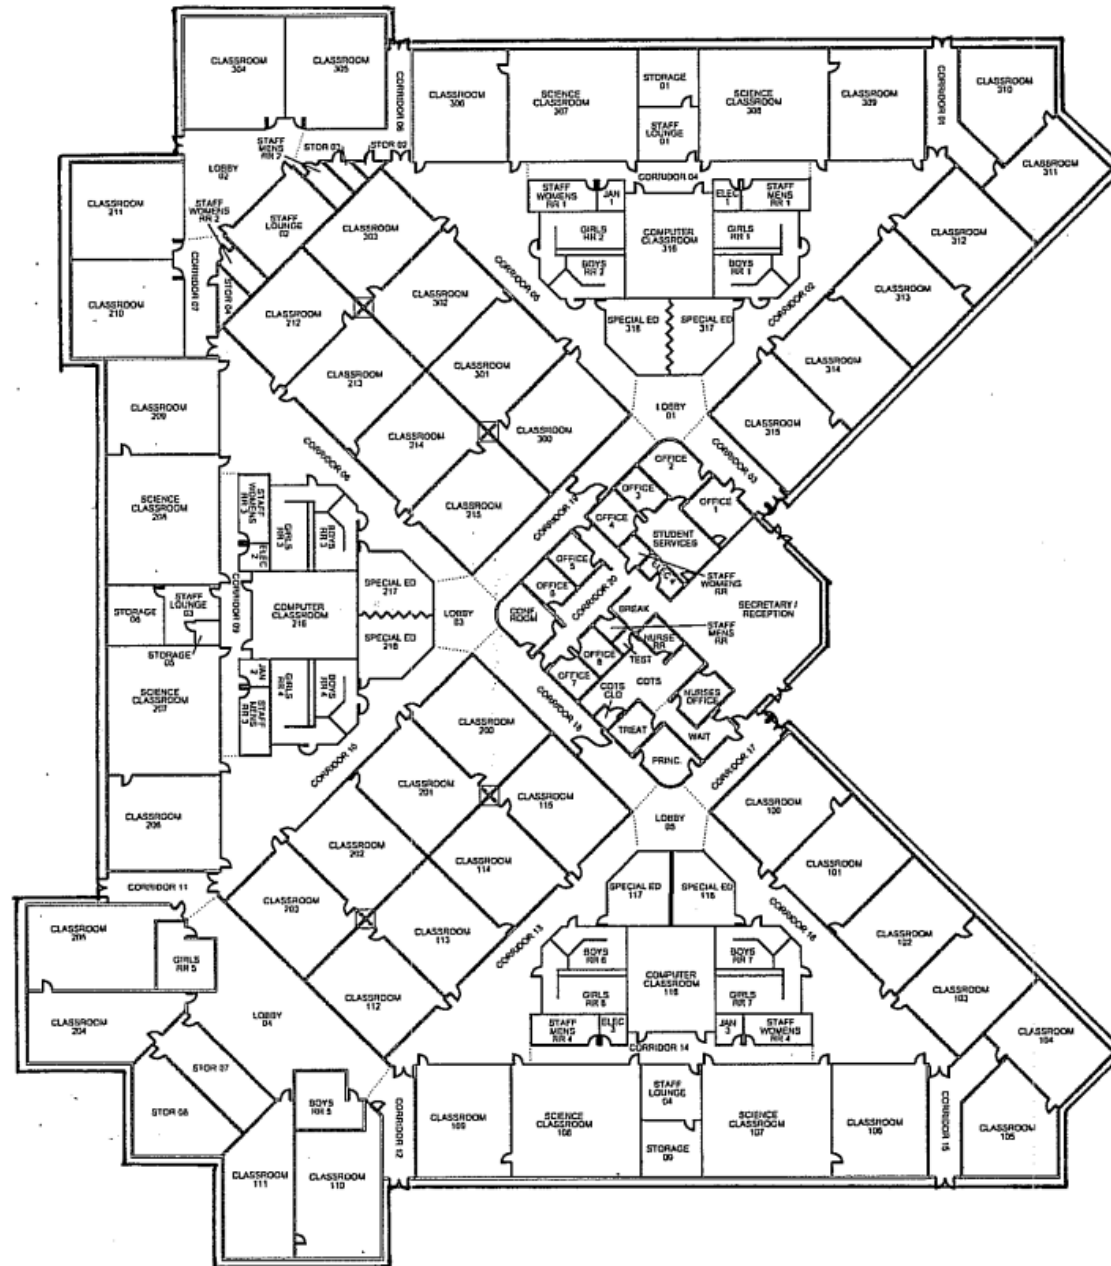


Site Plan
Kyrene Aprende Middle School
777 North Desert Breeze Blvd. E, Chandler, Arizona

Project No. AZ1418.55

Main Building

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

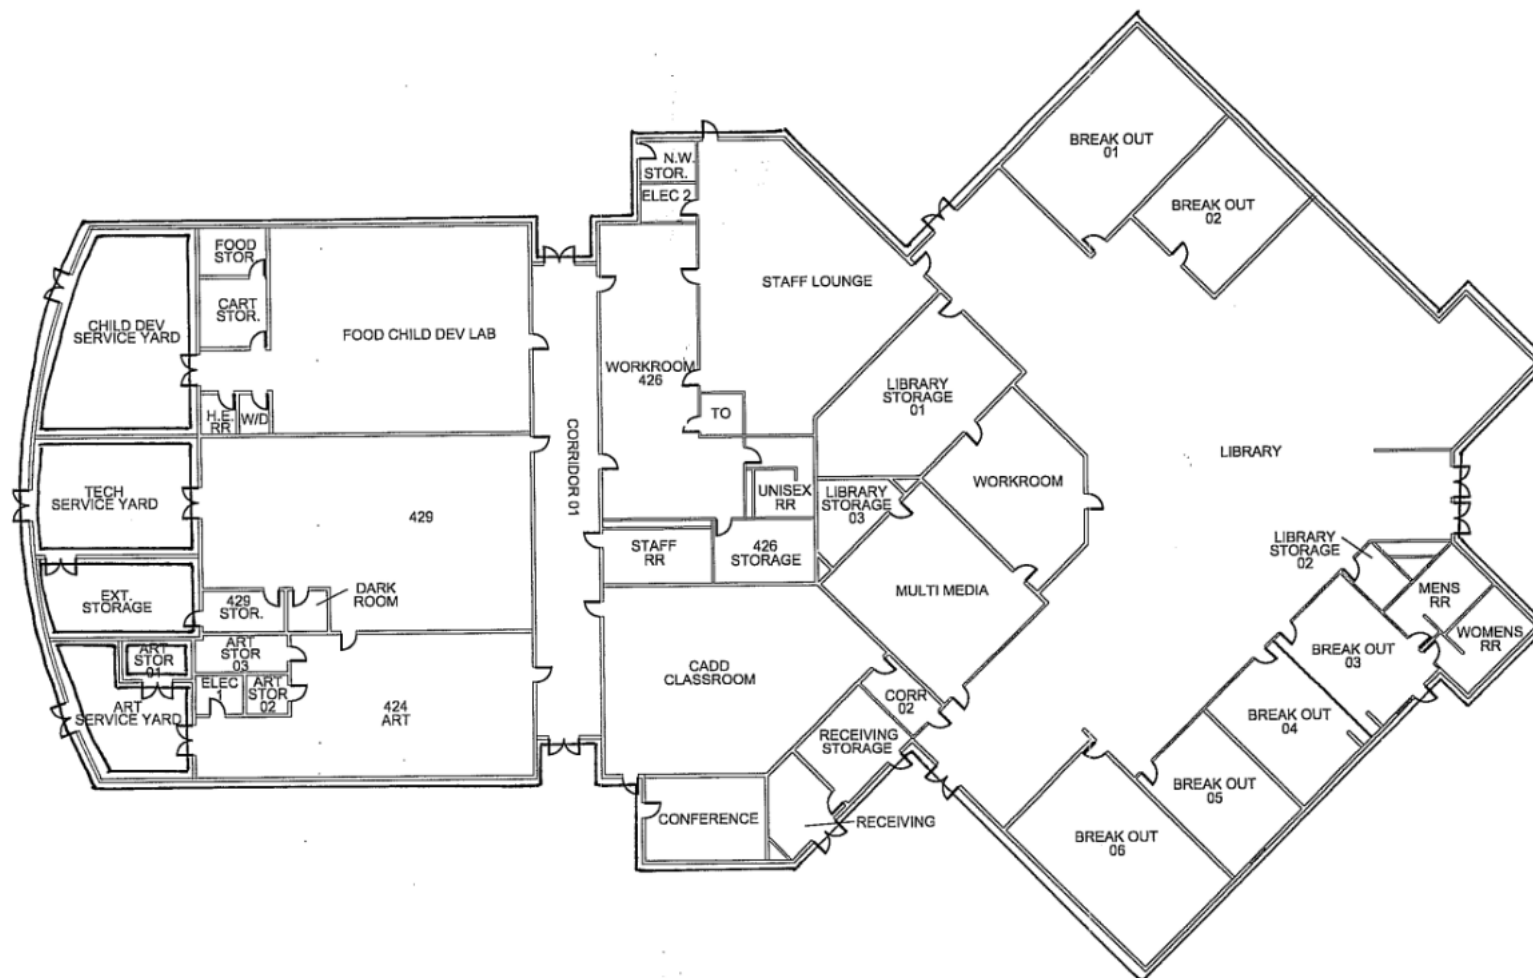



Site Plan
Kyrene Aprende Middle School
777 North Desert Breeze Blvd. E, Chandler, Arizona

Project No. AZ1418.55

Media Center

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

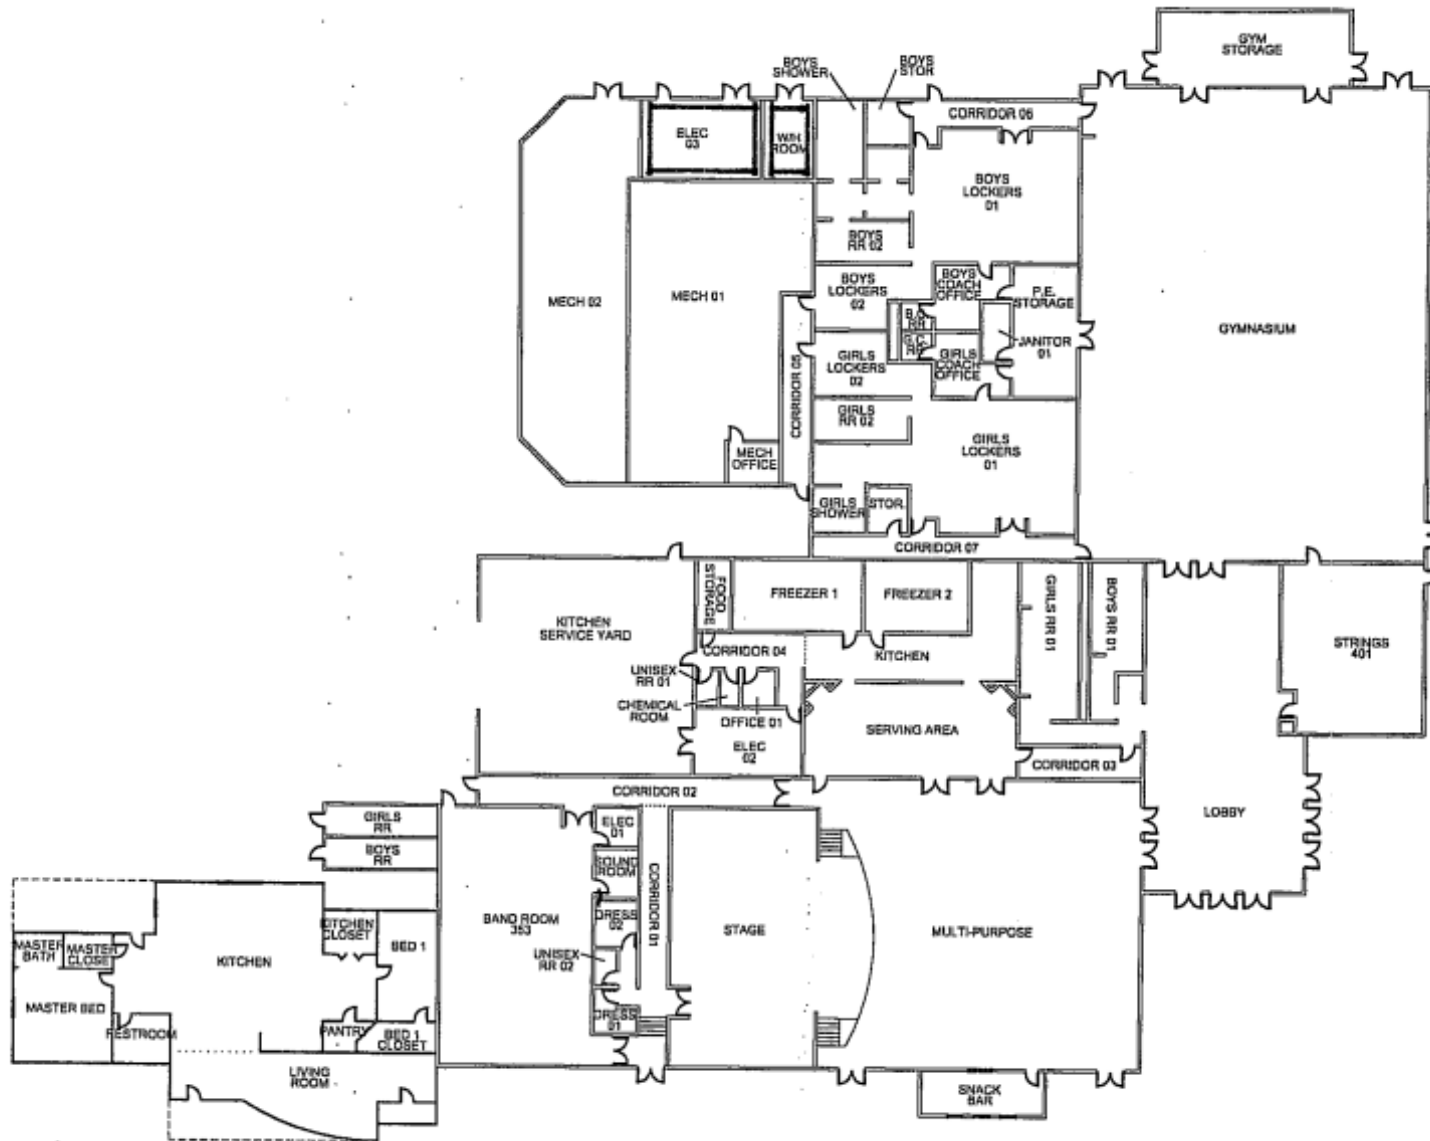

Site Plan
Kyrene Aprende Middle School
777 North Desert Breeze Blvd. E, Chandler, Arizona

Project No. AZ1418.55

Gym/Multi-Purpose

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

SECTION 5



HOMOGENEOUS MATERIALS INVENTORY LISTS

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ0959.2613 / AZ1418.55		Client: Kyrene Elementary School District No. 28				
Inspection Date(s): 11/30/20 + 7/2/2025		Site: Kyrene Aprende Middle School - Main Bldg.				
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Quantity (sq. ft.)
Inspection Date: 11/30/2020 - AHERA Building Inspectors: Nick Marcos (Certification: ON-4644-8873-040320)						
1	Orange Peel Drywall - Multicolored Paint Layers	Throughout Building	No	No	M	89,200
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White/Tan Drywall		No	No	M	
2	Blue Cove Base	Throughout Building	No	No	M	2,500
3	White Mastic for Cove Base		No	No	M	
4	Gray Cove Base	Electrical Rooms and Storage	No	No	M	450
5	Tan Mastic for Cove Base		No	No	M	
6	Gray 4"x 4" Ceramic Wall Tile	Restrooms	No	No	M	250
7	Tan Mastic for 4"x 4" Ceramic Wall Tile		No	No	M	250
8	Tan Grout for 4"x 4" Ceramic Wall Tile		No	No	M	50
9	Cream 4"x 4" Ceramic Wall Tile	Restrooms	No	No	M	100
10	Blue 4"x 4" Ceramic Cove Base Tile	Restrooms	No	No	M	100
11	Greenboard for Ceramic Wall Tiles	Restrooms	No	No	M	250
12	Tan Mastic for Greenboard		No	No	M	
13	Tan/Green Paper for Greenboard		No	No	M	
14	Pink Wall Insulation	Throughout Building	No	No	M	75,000
Inspection Date: 7/2/2025 - AHERA Building Inspectors: Isai Portillo (Certification: ON-188748-19438-121224)						
15	White 2'x2' Ceiling Tile	Office and Classrooms	No	Yes	M	65,000
16	Replacement 2'x2' Ceiling Tile	Classrooms and Hallway	No	Yes	M	300
17	Black Window Sealant	Hallways	No	No	M	40
18	Blue 4" Cove Base	Conference Room, Hallways, and Staff Lounge	No	No	M	2,500
19	Cream Mastic for Blue 4" Cove Base		No	No	M	
20	Blue/Gray 2'x2' Carpet	Classrooms	No	No	M	55,000
21	Yellow Mastic for Blue/Gray 2'x2' Carpet		No	No	M	
22	Beige w/ Tan Specks 12"x12" VCT	Storage Rooms	No	No	M	12,000
23	Yellow Mastic for Beige w/ Tan Specks 12"x12" VCT		No	No	M	

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ0959.2613 / AZ1418.55		Client: Kyrene Elementary School District No. 28				
Inspection Date(s): 11/30/20 + 7/2/2025		Site: Kyrene Aprende Middle School - Main Bldg.				
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Quantity (sq. ft.)
24	Gray Sink Coating	Classrooms (With Sinks)	No	No	M	208
25	Tac Board Wrap	Throughout Building	No	No	M	11,800
26	Semi-Transparent Mastic for Tac Board Wrap		No	No	M	
27	Gray 2"x2" Ceramic Floor Tile		No	No	M	
28	Gray Grout for Gray 2"x2" Ceramic Floor Tile	Men and Women's Restrooms	No	No	M	1,300
Assumed Materials						
29	Frame Caulking	Throughout Building	Assumed	No	M	350
30	Door/Window Sealant	Throughout Building	Assumed	No	M	5
31	Grout for 9"x9" Block	Entrance in Main Office	Assumed	No	M	50
32	Counter Caulking	Throughout Building	Assumed	No	M	60
33	Off-White 4"x4" Ceramic Wall Tile	Restroom	Assumed	No	M	20,000
34	Grout for Off-White 4"x4" Ceramic Wall Tile		Assumed	No	M	10,000
35	Black 4"x4" Ceramic Wall Tile	Restroom	Assumed	No	M	850
36	Grout for Black 4"x4" Ceramic Wall Tile		Assumed	No	M	120
37	Mastic for Black 4"x4" Ceramic Wall Tile		Assumed	No	M	850
38	Gray 4"x4" Ceramic Wall Tile	Restroom	Assumed	No	M	850
39	Grout for Gray 4"x4" Ceramic Wall Tile		Assumed	No	M	120
40	Mastic for Gray 4"x4" Ceramic Wall Tile		Assumed	No	M	850
41	Navy Blue 4"x4" Ceramic Cove Base	Restroom	Assumed	No	M	550
42	Grout for Navy Blue 4"x4" Ceramic Cove Base		Assumed	No	M	75
43	Mastic for Navy Blue 4"x4" Ceramic Cove Base		Assumed	No	M	550
44	2"x2" Gray Ceramic Floor Tile	Restroom	Assumed	No	M	7,000
45	Grout for 2"x2" Gray Ceramic Floor Tile		Assumed	No	M	1,200
46	Thinset for 2"x2" Gray Ceramic Floor Tile		Assumed	No	M	7,000
47	Fixture Caulking	Restrooms	Assumed	No	M	80
48	Beige and Black Epoxy Flooring	Nurses Restroom	Assumed	No	M	15

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Main Building - Page 2

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ0959.2613 / AZ1418.55		Client: Kyrene Elementary School District No. 28				
Inspection Date(s): 11/30/20 + 7/2/2025		Site: Kyrene Aprende Middle School - Main Bldg.				
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Quantity (sq. ft.)
49	Concrete Foundation	Throughout Building	Assumed	No	M	105,000
50	Concrete Pad	Office Storage	Assumed	No	M	16
51	Smooth Drywall System	Electrical Rooms	Assumed	No	M	2,600
52	Brown Door Sealant	Entrances	Assumed	No	M	5
53	Brown Block	Hallways	Assumed	No	M	1,640
54	Mortar for Brown Block		Assumed	No	M	
55	Brown Interior Expansion Joint	Hallways	Assumed	No	M	10
56	Fiberglass Reinforced Plastic (FRP)	Fountains Next to Restrooms	Assumed	No	M	144
57	Mastic for Fiberglass Reinforced Plastic (FRP)		Assumed	No	M	
58	Gray Transite Panel	Room 107	Assumed	No	M	32
59	Gray 12"x12" Ceramic Floor Tile	Custodial	Assumed	No	M	400
60	Grout for Gray 12"x12" Ceramic Floor Tile		Assumed	No	M	100
61	Thinset Gray 12"x12" Ceramic Floor Tile		Assumed	No	M	400
62	Mop Sink Caulking	Custodial	Assumed	No	M	5
63	4"x4" White Ceramic Wall Tile	Restrooms	Assumed	No	M	120
64	Grout for 4"x4" White Ceramic Wall Tile		Assumed	No	M	50
65	Mastic for 4"x4" White Ceramic Wall Tile		Assumed	No	M	120
66	Gray Wall Paper	Nurses Office	Assumed	No	M	200
67	Untextured Drywall System	Above Plenum	Assumed	No	M	16,400
68	Red Fire Stop Caulking	Above Plenum	Assumed	No	M	25
69	Gray Duct Mastic	Above Plenum	Assumed	No	M	300
70	Silver Duct Wrap	Above Plenum	Assumed	No	M	17,160
71	Insulation for Silver Duct Wrap		Assumed	Yes	TSI	
72	Silver Flex Duct Wrap	Above Plenum	Assumed	No	M	9,500
73	Insulation for Silver Flex Duct Wrap		Assumed	Yes	TSI	
74	Silver Ceiling Wrap	Above Plenum	Assumed	No	M	100,000
75	Insulation for Silver Ceiling Wrap		Assumed	Yes	TSI	
76	White Pipe Wrap	Above Plenum	Assumed	No	M	2,600
77	Insulation for White Pipe Wrap		Assumed	Yes	TSI	

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Main Building - Page 3

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ0959.2613 / AZ1418.55		Client: Kyrene Elementary School District No. 28				
Inspection Date(s): 11/30/20 + 7/2/2025		Site: Kyrene Aprende Middle School - Main Bldg.				
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Quantity (sq. ft.)
78	Blue 2"x2" Carpet	Main Entrance	Assumed	No	M	40
79	Mastic for Blue 2"x2" Carpet		Assumed	No	M	

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.55		Client: Kyrene Elementary School District No. 28				
Inspection Date(s): 3/13/2024 + 7/2/2025		Site: Kyrene Aprende Middle School - Media Center				
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
Inspection Date: 3/13/2024 - AHERA Building Inspector: Tracey Carpenter (Certification: ON-4644-14588-090523)						
1	Blue Cove Base	Throughout Building	No	No	M	620
2	Tan Mastic for Blue Cove Base		No	No	M	
3	Blue Cove Base Tile		No	No	M	
4	Gray Grout for Blue Cove Base Tile	Restrooms	No	No	M	25
5	Tan Mastic for Blue Cove Base Tile		No	No	M	110
6	Gray 2"x2" Restroom (RR) Floor Tile		No	No	M	800
7	Grout for Gray 2"x2" RR Floor Tile	Restrooms	No	No	M	250
8	Mastic for Gray 2"x2" RR Floor Tile		No	No	M	800
9	Orange Peel Drywall System - Paint		Throughout Building	No	No	M
	Tan Mastic	No		No	M	
	White Compound	No		No	M	
	White Drywall with Brown Paper	No		No	M	
Inspection Date: 7/2/2025 - AHERA Building Inspectors: Isai Portillo (Certification: ON-188748-19438-121224)						
10	White 2'x2' Ceiling Tile (Old)	Throughout Building	No	Yes	M	10,400
11	White 2'x2' Ceiling Tile (New)	Throughout Building	No	Yes	M	1,900
12	White Smooth 2'x2' Ceiling Tile	Throughout Building	No	Yes	M	1,850
13	White Textured 2'x2' Ceiling Tile	Library Entrance	No	Yes	M	675
14	Beige w/ Tan Specks 12"x12" VCT	Throughout Building	No	No	M	2,700
15	Mastic for Beige w/ Tan Specks 12"x12" VCT		No	No	M	
16	Blue 4" Cove Base	Classroom and Office	No	No	M	620
17	Tan Mastic for Blue 4" Cove Base		No	No	M	
18	Light Brown Mastic for Blue 4" Cove Base		No	No	M	
19	Blue/Gray 2'x2' Carpet	Classroom and Break Out	No	No	M	8,200
20	Tan/Green Mastic for Blue/Gray 2'x2' Carpet		No	No	M	
21	Black Window Sealant	Throughout Building	No	No	M	15

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Media Center Building - Page 1

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.55		Client: Kyrene Elementary School District No. 28				
Inspection Date(s): 3/13/2024 + 7/2/2025		Site: Kyrene Aprende Middle School - Media Center				
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
Assumed Materials						
22	Concrete Foundation	Throughout Building	Assumed	No	M	43,000
23	Floor Expansion Joint		Assumed	No	M	20
24	Tac Board Wrap	Classrooms	Assumed	No	M	6,500
25	Mastic for Tac Board Wrap		Assumed	No	M	
26	Frame Caulking	Building Exterior	Assumed	No	M	60
27	Gray 2"x2" Ceramic Floor Tile	Restrooms	Assumed	No	M	800
28	Grout for Gray 2"x2" Ceramic Floor Tile		Assumed	No	M	250
29	Thinset for Gray 2"x2" Ceramic Floor Tile		Assumed	No	M	800
30	White 4"x4" Ceramic Wall Tile	Restrooms	Assumed	No	M	3,000
31	Mastic for White 4"x4" Ceramic Wall Tile		Assumed	No	M	1,500
32	Grout for White 4"x4" Ceramic Wall Tile		Assumed	No	M	3,000
33	Gray 4"x4" Ceramic Wall Tile	Restrooms	Assumed	No	M	250
34	Mastic for Gray 4"x4" Ceramic Wall Tile		Assumed	No	M	50
35	Grout for Gray 4"x4" Ceramic Wall Tile		Assumed	No	M	250
36	Black 4"x4" Ceramic Wall Tile	Restrooms	Assumed	No	M	250
37	Mastic for Black 4"x4" Ceramic Wall Tile		Assumed	No	M	250
38	Grout for Black 4"x4" Ceramic Wall Tile		Assumed	No	M	50
39	Blue 4"x4" Ceramic Cove Base Tile	Restrooms	Assumed	No	M	110
40	Grout for Blue 4"x4" Ceramic Cove Base Tile		Assumed	No	M	25
41	Mastic for Blue 4"x4" Ceramic Cove Base Tile		Assumed	No	M	110
42	Counter/Cabinet Caulking	Throughout Building	Assumed	No	M	10
43	Fixture Caulking	Restrooms	Assumed	No	M	20
44	Blue 2"x2" Carpet	Library Entrance	Assumed	No	M	240
45	Mastic for Blue 2"x2" Carpet		Assumed	No	M	
46	Blue/Gray 2"x2" Carpet	Throughout Building	Assumed	No	M	8,200
47	Mastic for Blue/Gray 2"x2" Carpet		Assumed	No	M	
48	Clear Block 9"x9" Grout	Library Entrance	Assumed	No	M	50

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.55		Client: Kyrene Elementary School District No. 28				
Inspection Date(s): 3/13/2024 + 7/2/2025		Site: Kyrene Aprende Middle School - Media Center				
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
49	Black Cove Base	Room 424	Assumed	No	M	80
50	Mastic for Black Cove Base		Assumed	No	M	
51	Gray Cove Base	Room 424, Staff Lounge, and Storage	Assumed	No	M	120
52	Mastic for Gray Cove Base		Assumed	No	M	
53	Concrete Pad	Electrical	Assumed	No	M	16
54	Smooth Texture Drywall System	Electrical	Assumed	No	M	480
55	Gray Sink Coating	Staff Lounge	Assumed	No	M	10
56	Black Chalk Board	Classroom and Staff Lounge	Assumed	No	M	96
57	Off-White/Gray Spec 12"x12" VCT	Receiving Storage	Assumed	No	M	20
58	Mastic for Off-White/Gray Spec 12"x12" VCT		Assumed	No	M	
59	Brown CMU Block	Building Exterior	Assumed	No	M	12,600
60	Mortar for CMU Block		Assumed	No	M	
61	Brown Decorative Block	Building Exterior	Assumed	No	M	280
62	Mortar for Brown Decorative Block		Assumed	No	M	
63	Brown 16"x3" CMU Block	Building Exterior	Assumed	No	M	70
64	Mortar for Brown 16"x3" CMU Block		Assumed	No	M	
65	Untextured Drywall System	Above Plenum	Assumed	No	M	1,500
66	Ceiling Wrap Backing	Above Plenum	Assumed	No	M	40,000
67	Insulation for Ceiling Wrap Backing		Assumed	Yes	TSI	
68	Gray Duct Mastic	Above Plenum	Assumed	No	M	4,300
69	Silver Flex Duct Wrap	Above Plenum	Assumed	No	M	120
70	Insulation for Silver Flex Duct Wrap		Assumed	Yes	TSI	
71	Silver Duct Wrap	Above Plenum	Assumed	No	M	1,920
72	Insulation for Silver Duct Wrap		Assumed	Yes	TSI	
73	Pipe Wrap	Above Plenum	Assumed	No	M	300
74	Insulation for Pipe Wrap		Assumed	Yes	TSI	
75	Red Fire Stop Caulking	Above Plenum	Assumed	No	M	50

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.14 / AZ1418.55		Client: Kyrene Elementary School District No. 28				
Inspection Date(s): 3/6/2024 + 7/2/2025		Site: Kyrene Aprende Middle School - Multipurpose/Gym				
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
Inspection Date: 3/6/2024 - AHERA Building Inspector: Xin Lou (Certification: ON-4644-548-092323)						
1	Gray 12" x 12" Ceramic Floor Tile	Serving Area	No	No	M	350
2	Yellow Mastic for Gray 12" x 12" Ceramic Floor Tile		No	No	M	
3	Gray Grout	Serving Area and Kitchen	No	No	M	100
4	Gray Ceramic Base Tile	Serving Area and Kitchen	No	No	M	350
5	Yellow Mastic for Gray Ceramic Base Tile		No	No	M	
6	Gray Grout	Serving Area and Kitchen	No	No	M	100
7	Gray Cove Base	Serving Area and Kitchen	No	No	M	150
8	Yellow Mastic for Gray Cove Base		No	No	M	
9	Black Cove Base	Storage and Kitchen	No	No	M	250
10	Cream Mastic for Black Cove Base		No	No	M	
11	White Fiberglass Reinforced Plastic (FRP)	Kitchen	No	No	M	450
12	Tan Mastic for FRP		No	No	M	
13	Cream Mastic for FRP		No	No	M	
14	White Counter Caulking	Kitchen	No	No	M	15
15	Orange Peel Drywall System - Cream Paint	Throughout Building	No	No	M	35,000
	Texture		No	No	M	
	Tape		No	No	M	
	Joint Compound		No	No	M	
	Drywall		No	No	M	
16	Beige 12" x 12" VCT	Storage and Dry Storage	No	No	M	350
17	Yellow Mastic for Beige 12" x 12" VCT		No	No	M	
18	Blue Cove Base	Storage, Dry Storage, and Office	No	No	M	150
19	Yellow Mastic for Blue Cove Base		No	No	M	
20	White Window Frame Caulking	Hallway	No	No	M	50
21	White Paint for Window Frame Caulking		No	No	M	
22	Black Window Glazing	Storage	No	No	M	100
23	White Door Frame Caulking	Storage, Serving Area, and Office	No	No	M	75
24	White Paint for Door Frame Caulking		No	No	M	

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.14 / AZ1418.55		Client: Kyrene Elementary School District No. 28				
Inspection Date(s): 3/6/2024 + 7/2/2025		Site: Kyrene Aprende Middle School - Multipurpose/Gym				
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
25	White Fixture Caulking	Restroom	No	No	M	15
26	White 4" x 4" Ceramic Wall Tile	Restroom	No	No	M	110
27	Yellow Mastic for White 4" x 4" Wall Tile		No	No	M	
28	Gray 4" x 4" Ceramic Wall Tile	Restroom	No	No	M	300
29	Yellow Mastic for Gray 4" x 4"Wall Tile		No	No	M	
30	Tan 4" x 4" Ceramic Wall Tile	Restroom	No	No	M	300
31	White Mastic for Tan 4" x 4" Ceramic Wall Tile		No	No	M	300
32	Mortar for Tan 4" x 4" Ceramic Wall Tile		No	No	M	150
33	Blue 4" x 4" Ceramic Wall Tile	Restroom	No	No	M	100
34	Tan Grout		No	No	M	25
35	Gray 2" x 2" Ceramic Floor Tile	Restroom	No	No	M	250
36	Yellow Mastic for Gray 2" x 2" Floor Tile		No	No	M	250
37	Gray Grout		No	No	M	75
38	2" x 2" Ceiling Tile	Kitchen and Storage	No	No	M	2,000
39	2" x 2" Ceiling Tile	Storage and Office	No	No	M	2,000
40	Silver Duct Wrap	Above Plenum	No	No	M	900
41	Yellow Insulation for Silver Duct Wrap		No	No	M	
Inspection Date: 7/2/2025 - AHERA Building Inspectors: Isai Portillo (Certification: ON-188748-19438-121224)						
42	White 2'x2' Ceiling Tile (Old)	Throughout Building	No	Yes	M	7,300
43	White 2'x2' Ceiling Tile (New)	Classrooms	No	Yes	M	1,200
44	White Smooth 2'x2' Ceiling Tile	Snack Bar and Serving Area	No	Yes	M	2,000
45	Beige w/ Tan Specks 12"x12" VCT	Hallway and Storage	No	No	M	7,300
46	Tan Mastic for 12"x12" VCT		No	No	M	
47	Blue 4" Cove Base	Throughout Building	No	No	M	300
48	Tan Mastic for Blue 4" Cove Base		No	No	M	
49	Blue/Gray 2'x2' Carpet	Classrooms and Lobby	No	No	M	500
50	Brown Mastic for Multicolored Carpet		No	No	M	
51	White Fixture Caulking	Restroom	No	No	M	30
52	Brown Frame Sealant	Throughout Building	No	No	M	21,500

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.14 / AZ1418.55		Client: Kyrene Elementary School District No. 28				
Inspection Date(s): 3/6/2024 + 7/2/2025		Site: Kyrene Aprende Middle School - Multipurpose/Gym				
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
Assumed Material						
53	Interior Frame Caulking	Throughout Building	Assumed	No	M	150
54	White Frame Caulking	Throughout Building	Assumed	No	M	10
55	9"x9" Block Grout	Throughout Building	Assumed	No	M	50
56	Gray 3"x6" Ceramic Cove Base	Locker Rooms	Assumed	No	M	6,000
57	Mastic for Gray 3"x6" Cove Base		Assumed	No	M	6,000
58	Grout for 3"x6" Cove Base		Assumed	No	M	3,000
59	Gray 12"x12" Ceramic Floor Tile	Kitchen	Assumed	No	M	2,100
60	Mastic for 12"x12" Floor Tile		Assumed	No	M	2,100
61	Grout for 12"x12" Floor Tile		Assumed	No	M	1,050
62	Fiberglass Reinforced Plastic (FRP)	Kitchen and Janitors Closet	Assumed	No	M	1,400
63	Mastic for FRP		Assumed	No	M	
64	4" Brown Cove Base	Kitchen	Assumed	No	M	5
65	Mastic for 4" Brown Cove Base		Assumed	No	M	
66	6" Gray Cove Base	Kitchen	Assumed	No	M	10
67	Mastic for 6" Gray Cove Base		Assumed	No	M	
68	6"x6" Ceramic Cove Base	Kitchen	Assumed	No	M	35
69	Mastic for 6"x6" Ceramic Cove Base		Assumed	No	M	
70	Black 4" Cove Base	Room 401	Assumed	No	M	140
71	Mastic for lack 4" Cove Base		Assumed	No	M	
72	Blue Carpet	Entrances	Assumed	No	M	60
73	Mastic for Blue Carpet		Assumed	No	M	
74	Blue 2"x2" Carpet	Entrances	Assumed	No	M	150
75	Mastic for 2"x2" Carpet		Assumed	No	M	
76	Tac Board Wrap	Classrooms	Assumed	No	M	550
77	Mastic for Tac Board Wrap		Assumed	No	M	
78	Concrete Foundation	Throughout Building	Assumed	No	M	32,000

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.14 / AZ1418.55		Client: Kyrene Elementary School District No. 28				
Inspection Date(s): 3/6/2024 + 7/2/2025		Site: Kyrene Aprende Middle School - Multipurpose/Gym				
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
79	Off- White 4"x4" Ceramic Wall Tile	Restrooms	Assumed	No	M	7,000
80	Grout for 4"x4" Ceramic Wall Tile		Assumed	No	M	5,000
81	Thinset for 4"x4" Ceramic Wall Tile		Assumed	No	M	7,000
82	Black 4"x4" Ceramic Wall Tile	Restrooms	Assumed	No	M	200
83	Grout for 4"x4" Ceramic Wall Tile		Assumed	No	M	100
84	Thinset for 4"x4" Ceramic Wall Tile		Assumed	No	M	200
85	Navy Blue 4" Ceramic Cove Base	Restrooms	Assumed	No	M	350
86	Grout for Navy Blue 4" Cove Base		Assumed	No	M	
87	Gray/Blue 2"x2" Carpet	Gym Storage and Classrooms	Assumed	No	M	1,500
88	Mastic for 2"x2" Carpet		Assumed	No	M	
89	Black Flooring	Room 401	Assumed	No	M	11,400
90	Mastic for Black Flooring		Assumed	No	M	
91	Brown Expansion Joint	Gym	Assumed	No	M	50
92	L Shape Cove Base	Gym	Assumed	No	M	160
93	Mastic for L Shape Cove Base		Assumed	No	M	
94	4" Gray Cove Base	Gym, Storage, and Office	Assumed	No	M	80
95	Mastic for 4" Cove Base		Assumed	No	M	
96	Silver Backing	Gym, Storage, and Office	Assumed	No	M	4,300
97	Insulation for Silver Backing		Assumed	No	M	
98	Beige 4"x4" Ceramic Wall Tile	Boy's and Girl's Locker Room	Assumed	No	M	20
99	Grout for Beige 4"x4" Ceramic Wall Tile		Assumed	No	M	
100	Gray Carpet	Storage	Assumed	No	M	180
101	Mastic for Gray Carpet		Assumed	No	M	
102	Brown 16"x3" CMU	Throughout Building	Assumed	No	M	400
103	Mortar for 16"x3" CMU		Assumed	No	M	150
104	Gray Sink Caulking	Throughout Building	Assumed	No	M	10
105	Black Floor Coating	Stage	Assumed	No	M	1,500
106	White Seam Tape	Above Plenum	Assumed	No	M	50
107	Mastic for Seam Tape		Assumed	No	M	

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.14 / AZ1418.55		Client: Kyrene Elementary School District No. 28				
Inspection Date(s): 3/6/2024 + 7/2/2025		Site: Kyrene Aprende Middle School - Multipurpose/Gym				
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
108	Gray Duct Mastic	Above Plenum	Assumed	No	M	120
109	Silver Flex Duct Wrap	Above Plenum	Assumed	No	M	900
110	Insulation for Silver Flex Duct Wrap		Assumed	Yes	TSI	
111	Red Fire Stop Caulking	Above Plenum	Assumed	No	M	50
112	Pipe Wrap	Above Plenum	Assumed	No	M	300
113	Insulation for Pipe Wrap		Assumed	Yes	TSI	

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

SECTION 6



PLM BULK SAMPLE SHEETS

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ0959.2613 / AZ1418.55			Client: Kyrene Elementary School District No. 28		
Sample Date(s):11/30/20 + 7/2/2025			Site: Kyrene Aprende Middle School - Main Bldg.		
Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 11/30/2020 - AHERA Building Inspectors: Nick Marcos (Certification: ON-4644-8873-040320)					
AZ0959.2613- PLM-1	1	Orange Peel Drywall - Multicolored Paint Layers	Hallway - East	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White/Tan Drywall		Convenient	None Detected
AZ0959.2613- PLM-2		Orange Peel Drywall - Multicolored Paint Layers	Storage - Northwest	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White/Tan Drywall		Convenient	None Detected
AZ0959.2613- PLM-3		Orange Peel Drywall - Multicolored Paint Layers	Hallway - North	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White/Tan Drywall		Convenient	None Detected
AZ0959.2613- PLM-4	2	Blue Cove Base	Hallway - North	Convenient	None Detected
	3	White Mastic for Cove Base		Convenient	None Detected
AZ0959.2613- PLM-5	2	Blue Cove Base	Hallway- North	Convenient	None Detected
	3	White Mastic for Cove Base		Convenient	None Detected
AZ0959.2613- PLM-6	2	Blue Cove Base	Hallway - West	Convenient	None Detected
	3	White Mastic for Cove Base		Convenient	None Detected
AZ0959.2613- PLM-7	4	Gray Cove Base	Electrical Room - West	Convenient	None Detected
	5	Tan Mastic for Cove Base		Convenient	None Detected
AZ0959.2613- PLM-8	4	Gray Cove Base	Storage - Southeast	Convenient	None Detected
	5	Tan Mastic for Cove Base		Convenient	None Detected
AZ0959.2613- PLM-9	4	Gray Cove Base	Storage - West	Convenient	None Detected
	5	Tan Mastic for Cove Base		Convenient	None Detected

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona



Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ0959.2613 / AZ1418.55			Client: Kyrene Elementary School District No. 28		
Sample Date(s): 11/30/20 + 7/2/2025			Site: Kyrene Aprende Middle School - Main Bldg.		
Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ0959.2613- PLM-10	6	Gray 4" x 4" Ceramic Wall Tile	Boy's Restroom	Convenient	None Detected
	7	Tan Mastic for 4" x 4" Ceramic Wall Tile		Convenient	None Detected
	8	Tan Grout for 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ0959.2613- PLM-11	6	Gray 4" x 4" Ceramic Wall Tile	Boy's Restroom	Convenient	None Detected
	7	Tan Mastic for 4" x 4" Ceramic Wall Tile		Convenient	None Detected
	8	Tan Grout for 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ0959.2613- PLM-12	6	Gray 4" x 4" Ceramic Wall Tile	Boy's Restroom	Convenient	None Detected
	7	Tan Mastic for 4" x 4" Ceramic Wall Tile		Convenient	None Detected
	8	Tan Grout for 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ0959.2613- PLM-13	9	Cream 4" x 4" Ceramic Wall Tile	Boy's Restroom	Convenient	None Detected
AZ0959.2613- PLM-14		Cream 4" x 4" Ceramic Wall Tile	Boy's Restroom	Convenient	None Detected
AZ0959.2613- PLM-15		Cream 4" x 4" Ceramic Wall Tile	Boy's Restroom	Convenient	None Detected
AZ0959.2613- PLM-16	10	Blue 4" x 4" Ceramic Cove Base Tile	Boy's Restroom	Convenient	None Detected
AZ0959.2613- PLM-17		Blue 4" x 4" Ceramic Cove Base Tile	Boy's Restroom	Convenient	None Detected
AZ0959.2613- PLM-18		Blue 4" x 4" Ceramic Cove Base Tile	Boy's Restroom	Convenient	None Detected
AZ0959.2613- PLM-19	11	Greenboard for Ceramic Wall Tiles	Boy's Restroom	Convenient	None Detected
	12	Tan Mastic for Greenboard		Convenient	None Detected
	13	Tan/Green Paper for Greenboard		Convenient	None Detected
AZ0959.2613- PLM-20	11	Greenboard for Ceramic Wall Tiles	Boy's Restroom	Convenient	None Detected
	12	Tan Mastic for Greenboard		Convenient	None Detected
	13	Tan/Green Paper for Greenboard		Convenient	None Detected
AZ0959.2613- PLM-21	11	Greenboard for Ceramic Wall Tiles	Boy's Restroom	Convenient	None Detected
	12	Tan Mastic for Greenboard		Convenient	None Detected
	13	Tan/Green Paper for Greenboard		Convenient	None Detected
AZ0959.2613- PLM-22	14	Pink Wall Insulation	Boy's Restroom	Convenient	None Detected
AZ0959.2613- PLM-23		Pink Wall Insulation	Boy's Restroom	Convenient	None Detected
AZ0959.2613- PLM-24		Pink Wall Insulation	Boy's Restroom	Convenient	None Detected

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona



Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ0959.2613 / AZ1418.55			Client: Kyrene Elementary School District No. 28		
Sample Date(s): 11/30/20 + 7/2/2025			Site: Kyrene Aprende Middle School - Main Bldg.		
Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 7/2/2025 - AHERA Building Inspectors: Isai Portillo (Certification: ON-188748-19438-121224)					
AZ1418.55-PLM-1	15	White 2' x 2' Ceiling Tile	Office 6 - North	Random	None Detected
AZ1418.55-PLM-2		White 2' x 2' Ceiling Tile	Classroom 315 - East	Random	None Detected
AZ1418.55-PLM-3		White 2' x 2' Ceiling Tile	Classroom 203 - West	Random	None Detected
AZ1418.55-PLM-4	16	Replacement 2' x 2' Ceiling Tile	Classroom 207 - East	Random	None Detected
AZ1418.55-PLM-5		Replacement 2' x 2' Ceiling Tile	Classroom 301 - East	Random	None Detected
AZ1418.55-PLM-6		Replacement 2' x 2' Ceiling Tile	Corridor 16 - North	Random	None Detected
AZ1418.55-PLM-7	17	Black Window Sealant	Corridor 10 - East	Convenient	None Detected
AZ1418.55-PLM-8		Black Window Sealant	Corridor 02 - North	Convenient	None Detected
AZ1418.55-PLM-9		Black Window Sealant	Corridor 16 - Southeast	Convenient	None Detected
AZ1418.55-PLM-10	18	Blue 4" Cove Base	Conference Room - South	Convenient	None Detected
	19	Cream Mastic for Blue 4" Cove Base		Convenient	None Detected
AZ1418.55-PLM-11	18	Blue 4" Cove Base	Office 2 - West	Convenient	None Detected
	19	Cream Mastic for Blue 4" Cove Base		Convenient	None Detected
AZ1418.55-PLM-12	18	Blue 4" Cove Base	Staff Lounge 04 - South	Convenient	None Detected
	19	Cream Mastic for Blue 4" Cove Base		Convenient	None Detected
AZ1418.55-PLM-13	20	Blue/Gray 2' x 2' Carpet	Classroom 107 - South	Convenient	None Detected
	21	Yellow Mastic for Blue/Gray 2' x 2' Carpet		Convenient	None Detected
AZ1418.55-PLM-14	20	Blue/Gray 2' x 2' Carpet	Classroom 102 - North	Convenient	None Detected
	21	Yellow Mastic for Blue/Gray 2' x 2' Carpet		Convenient	None Detected
AZ1418.55-PLM-15	20	Blue/Gray 2' x 2' Carpet	Classroom 305 - South	Convenient	None Detected
	21	Yellow Mastic for Blue/Gray 2' x 2' Carpet		Convenient	None Detected
AZ1418.55-PLM-16	22	Beige w/ Tan Specks 12" x 12" VCT	Storage 09 - South	Convenient	None Detected
	23	Yellow Mastic for Beige w/ Tan Specks 12" x 12" VCT		Convenient	None Detected
AZ1418.55-PLM-17	22	Beige w/ Tan Specks 12" x 12" VCT	Storage 06 - South	Convenient	None Detected
	23	Yellow Mastic for Beige w/ Tan Specks 12" x 12" VCT		Convenient	None Detected
AZ1418.55-PLM-18	22	Beige w/ Tan Specks 12" x 12" VCT	Storage 01 - North	Convenient	None Detected
	23	Yellow Mastic for Beige w/ Tan Specks 12" x 12" VCT		Convenient	None Detected
AZ1418.55-PLM-19	24	Gray Sink Coating	Classroom 113 - North	Convenient	None Detected
AZ1418.55-PLM-20		Gray Sink Coating	Classroom 201 - South	Convenient	None Detected

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona



Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ0959.2613 / AZ1418.55			Client: Kyrene Elementary School District No. 28		
Sample Date(s): 11/30/20 + 7/2/2025			Site: Kyrene Aprende Middle School - Main Bldg.		
Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.55-PLM-21		Gray Sink Coating	Classroom 309 - South	Convenient	None Detected

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona



Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ0959.2613 / AZ1418.55			Client: Kyrene Elementary School District No. 28		
Sample Date(s): 11/30/20 + 7/2/2025			Site: Kyrene Aprende Middle School - Main Bldg.		
Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.55-PLM-22	25	Tac Board Wrap	Corridor 10 - South	Convenient	None Detected
	26	Semi-Transparent Mastic for Tac Board Wrap		Convenient	None Detected
AZ1418.55-PLM-23	25	Tac Board Wrap	Classroom 102 - South	Convenient	None Detected
	26	Semi-Transparent Mastic for Tac Board Wrap		Convenient	None Detected
AZ1418.55-PLM-24	25	Tac Board Wrap	Classroom 205 - South	Convenient	None Detected
	26	Semi-Transparent Mastic for Tac Board Wrap		Convenient	None Detected
AZ1418.55-PLM-25	27	Gray 2" x 2" Ceramic Floor Tile	Staff Men's RR - Southwest	Convenient	None Detected
	28	Gray Grout for Gray 2" x 2" Ceramic Floor Tile		Convenient	None Detected
AZ1418.55-PLM-26	27	Gray 2" x 2" Ceramic Floor Tile	Girl's RR 1 - Northeast	Convenient	None Detected
	28	Gray Grout for Gray 2" x 2" Ceramic Floor Tile		Convenient	None Detected
AZ1418.55-PLM-27	27	Gray 2" x 2" Ceramic Floor Tile	Staff Women's RR 4 - Southeast	Convenient	None Detected
	28	Gray Grout for Gray 2" x 2" Ceramic Floor Tile		Convenient	None Detected

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.11 / AZ1418.55			Client: Kyrene Elementary School District No. 28		
Sample Date(s): 3/13/2024 + 7/2/2025			Site: Kyrene Aprende Middle School - Media Center		
Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 3/13/2024 - AHERA Building Inspector: Tracey Carpenter (Certification: ON-4644-14588-090523)					
AZ1418.11- PLM-1	1	Blue Cove Base	Library Storage 02 - West	Convenient	None Detected
	2	Tan Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.11- PLM-2	1	Blue Cove Base	Library - South	Convenient	None Detected
	2	Tan Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.11- PLM-3	1	Blue Cove Base	Staff Lounge - West	Convenient	None Detected
	2	Tan Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.11- PLM-4	3	Blue Cove Base Tile	Restroom - West	Convenient	None Detected
	4	Gray Grout for Blue Cove Base Tile		Convenient	None Detected
	5	Tan Mastic for Blue Cove Base Tile		Convenient	None Detected
AZ1418.11- PLM-5	3	Blue Cove Base Tile	Staff Restroom - Center	Convenient	None Detected
	4	Gray Grout for Blue Cove Base Tile		Convenient	None Detected
	5	Tan Mastic for Blue Cove Base Tile		Convenient	None Detected
AZ1418.11- PLM-6	3	Blue Cove Base Tile	Staff Restroom - West	Convenient	None Detected
	4	Gray Grout for Blue Cove Base Tile		Convenient	None Detected
	5	Tan Mastic for Blue Cove Base Tile		Convenient	None Detected
AZ1418.11- PLM-7	6	Gray 2" x 2" Restroom (RR) Floor Tile	Unisex Restroom - East	Convenient	None Detected
	7	Grout for Gray 2" x 2" RR Floor Tile		Convenient	None Detected
	8	Mastic for Gray 2" x 2" RR Floor Tile		Convenient	None Detected
AZ1418.11- PLM-8	6	Gray 2" x 2" Restroom (RR) Floor Tile	Unisex Restroom - West	Convenient	None Detected
	7	Grout for Gray 2" x 2" RR Floor Tile		Convenient	None Detected
	8	Mastic for Gray 2" x 2" RR Floor Tile		Convenient	None Detected
AZ1418.11- PLM-9	6	Gray 2" x 2" Restroom (RR) Floor Tile	Unisex Restroom - East	Convenient	None Detected
	7	Grout for Gray 2" x 2" RR Floor Tile		Convenient	None Detected
	8	Mastic for Gray 2" x 2" RR Floor Tile		Convenient	None Detected
AZ1418.11- PLM-10	9	Orange Peel Drywall System - Paint	Staff Lounge - West	Convenient	None Detected
		White Compound		Convenient	None Detected
		White Drywall		Convenient	None Detected

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona



Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.11 / AZ1418.55			Client: Kyrene Elementary School District No. 28		
Sample Date(s): 3/13/2024 + 7/2/2025			Site: Kyrene Aprende Middle School - Media Center		
Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.11- PLM-11	9	Orange Peel Drywall System - Paint	Break Out 06 - North	Convenient	None Detected
		Tan Mastic		Convenient	None Detected
		White Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.11- PLM-12	9	Orange Peel Drywall System - Paint	Break Out 06 - East	Convenient	None Detected
		Tan Mastic		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
Sample Date: 7/2/2025 - AHERA Building Inspectors: Isai Portillo (Certification: ON-188748-19438-121224)					
AZ1418.55-PLM-1	10	White 2' x 2' Ceiling Tile (Old)	Staff Lounge - East	Random	None Detected
AZ1418.55-PLM-2		White 2' x 2' Ceiling Tile (Old)	Multimedia - West	Random	None Detected
AZ1418.55-PLM-3		White 2' x 2' Ceiling Tile (Old)	Receiving Storage - East	Random	None Detected
AZ1418.55-PLM-4	11	White 2' x 2' Ceiling Tile (New)	Room 429 - Northeast	Random	None Detected
AZ1418.55-PLM-5		White 2' x 2' Ceiling Tile (New)	Room 429 - South	Random	None Detected
AZ1418.55-PLM-6		White 2' x 2' Ceiling Tile (New)	Room 429 - West	Random	None Detected
AZ1418.55-PLM-7	12	White Smooth 2' x 2' Ceiling Tile	Room 421 - Northeast	Random	None Detected
AZ1418.55-PLM-8		White Smooth 2' x 2' Ceiling Tile	Room 421 - Southeast	Random	None Detected
AZ1418.55-PLM-9		White Smooth 2' x 2' Ceiling Tile	Room 421 - Northwest	Random	None Detected
AZ1418.55-PLM-10	13	White Texture 2' x 2' Ceiling Tile	Room 424 - North	Random	None Detected
AZ1418.55-PLM-11		White Texture 2' x 2' Ceiling Tile	Library - Northwest	Random	None Detected
AZ1418.55-PLM-12		White Texture 2' x 2' Ceiling Tile	Library - Northwest	Random	None Detected
AZ1418.55-PLM-13	14	Beige w/ Tan Specks 12" x 12" VCT	Library Storage 01 - North	Convenient	None Detected
	15	Mastic for Beige w/ Tan Specks 12" x 12" VCT		Convenient	None Detected
AZ1418.55-PLM-14	14	Beige w/ Tan Specks 12" x 12" VCT	Library Storage 01 - West	Convenient	None Detected
	15	Mastic for Beige w/ Tan Specks 12" x 12" VCT		Convenient	None Detected
AZ1418.55-PLM-15	14	Beige w/ Tan Specks 12" x 12" VCT	Dark Room - North	Convenient	None Detected
	15	Mastic for Beige w/ Tan Specks 12" x 12" VCT		Convenient	None Detected
AZ1418.55-PLM-16	16	Blue 4" Cove Base	Staff Lounge - South	Convenient	None Detected
	17	Tan Mastic for Blue 4" Cove Base		Convenient	None Detected
	18	Light Brown Mastic for Blue 4" Cove Base		Convenient	None Detected

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona



Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.11 / AZ1418.55			Client: Kyrene Elementary School District No. 28		
Sample Date(s): 3/13/2024 + 7/2/2025			Site: Kyrene Aprende Middle School - Media Center		
Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.55-PLM-17	16	Blue 4" Cove Base	Break Out 04 - North	Convenient	None Detected
	17	Tan Mastic for Blue 4" Cove Base		Convenient	None Detected
	18	Light Brown Mastic for Blue 4" Cove Base		Convenient	None Detected
AZ1418.55-PLM-18	16	Blue 4" Cove Base	Conference - West	Convenient	None Detected
	17	Tan Mastic for Blue 4" Cove Base		Convenient	None Detected
	18	Light Brown Mastic for Blue 4" Cove Base		Convenient	None Detected
AZ1418.55-PLM-19	19	Blue/Gray 2' x 2' Carpet	Classroom - East	Convenient	None Detected
	20	Tan/Green Mastic for Blue/Gray 2' x 2' Carpet		Convenient	None Detected
AZ1418.55-PLM-20	19	Blue/Gray 2' x 2' Carpet	Break Out 02 - West	Convenient	None Detected
	20	Tan/Green Mastic for Blue/Gray 2' x 2' Carpet		Convenient	None Detected
AZ1418.55-PLM-21	19	Blue/Gray 2' x 2' Carpet	Break Out 06 - East	Convenient	None Detected
	20	Tan/Green Mastic for Blue/Gray 2' x 2' Carpet		Convenient	None Detected
AZ1418.55-PLM-22	21	Black Window Sealant	Library - East	Convenient	None Detected
AZ1418.55-PLM-23		Black Window Sealant	Corridor 01 - East	Convenient	None Detected
AZ1418.55-PLM-24		Black Window Sealant	Library - West	Convenient	None Detected

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.14 / AZ1418.55			Client: Kyrene Elementary School District No. 28		
Sample Date(s): 3/6/2024 + 7/2/2025			Site: Kyrene Aprende Middle School - Multipurpose/Gym		
Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 3/6/2024 - AHERA Building Inspector: Xin Lou (Certification: ON-4644-548-092323)					
AZ1418.14-PLM-1	1	Gray 12" x 12" Ceramic Floor Tile	Serving Area - Northwest	Convenient	None Detected
	2	Yellow Mastic for Gray 12" x 12" Ceramic Floor Tile		Convenient	None Detected
AZ1418.14-PLM-2	1	Gray 12" x 12" Ceramic Floor Tile	Kitchen - South	Convenient	None Detected
	2	Yellow Mastic for Gray 12" x 12" Ceramic Floor Tile		Convenient	None Detected
AZ1418.14-PLM-3	1	Gray 12" x 12" Ceramic Floor Tile	Serving Area - Southeast	Convenient	None Detected
	2	Yellow Mastic for Gray 12" x 12" Ceramic Floor Tile		Convenient	None Detected
AZ1418.14-PLM-4	3	Gray Grout	Serving Area - Northwest	Convenient	None Detected
AZ1418.14-PLM-5		Gray Grout	Kitchen - South	Convenient	None Detected
AZ1418.14-PLM-6		Gray Grout	Serving Area - Southeast	Convenient	None Detected
AZ1418.14-PLM-7	4	Gray Ceramic Base Tile	Serving Area - Northwest	Convenient	None Detected
	5	Yellow Mastic for Gray Ceramic Base Tile		Convenient	None Detected
AZ1418.14-PLM-8	4	Gray Ceramic Base Tile	Kitchen - South	Convenient	None Detected
	5	Yellow Mastic for Gray Ceramic Base Tile		Convenient	None Detected
AZ1418.14-PLM-9	4	Gray Ceramic Base Tile	Serving Area - Southeast	Convenient	None Detected
	5	Yellow Mastic for Gray Ceramic Base Tile		Convenient	None Detected
AZ1418.14-PLM-10	6	Gray Grout	Serving Area - North	Convenient	None Detected
AZ1418.14-PLM-11		Gray Grout	Kitchen - South	Convenient	None Detected
AZ1418.14-PLM-12		Gray Grout	Serving Area - Southeast	Convenient	None Detected
AZ1418.14-PLM-13	7	Gray Cove Base	Dry Storage - Southwest	Convenient	None Detected
	8	Yellow Mastic for Gray Cove Base		Convenient	None Detected
AZ1418.14-PLM-14	7	Gray Cove Base	Southeast of Freezer	Convenient	None Detected
	8	Yellow Mastic for Gray Cove Base		Convenient	None Detected
AZ1418.14-PLM-15	7	Gray Cove Base	Kitchen - Southeast	Convenient	None Detected
	8	Yellow Mastic for Gray Cove Base		Convenient	None Detected
AZ1418.14-PLM-16	9	Black Cove Base	Southeast of Freezer	Convenient	None Detected
	10	Cream Mastic for Black Cove Base		Convenient	None Detected
AZ1418.14-PLM-17	9	Black Cove Base	Office - South	Convenient	None Detected
	10	Cream Mastic for Black Cove Base		Convenient	None Detected

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona



Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.14 / AZ1418.55			Client: Kyrene Elementary School District No. 28		
Sample Date(s): 3/6/2024 + 7/2/2025			Site: Kyrene Aprende Middle School - Multipurpose/Gym		
Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.14-PLM-18	9	Black Cove Base	Storage 1 - West	Convenient	None Detected
	10	Cream Mastic for Black Cove Base		Convenient	None Detected
AZ1418.14-PLM-19	11	White Fiberglass Reinforced Plastic (FRP)	Kitchen - Northeast	Convenient	None Detected
	12	Tan Mastic for FRP		Convenient	None Detected
	13	Cream Mastic for FRP		Convenient	None Detected
AZ1418.14-PLM-20	11	White Fiberglass Reinforced Plastic (FRP)	Kitchen - Northeast	Convenient	None Detected
	12	Tan Mastic for FRP		Convenient	None Detected
	13	Cream Mastic for FRP		Convenient	None Detected
AZ1418.14-PLM-21	11	White Fiberglass Reinforced Plastic (FRP)	Kitchen - Southeast	Convenient	None Detected
	12	Tan Mastic for FRP		Convenient	None Detected
	13	Cream Mastic for FRP		Convenient	None Detected
AZ1418.14-PLM-22	14	White Counter Caulking	Kitchen - Northeast	Convenient	None Detected
AZ1418.14-PLM-23		White Counter Caulking	Kitchen - Northwest	Convenient	None Detected
AZ1418.14-PLM-24		White Counter Caulking	Kitchen - Southwest	Convenient	None Detected
AZ1418.14-PLM-25	15	Orange Peel Drywall System - Cream Paint	Kitchen - Northeast	Convenient	None Detected
		Texture		Convenient	None Detected
		Tape		Convenient	None Detected
		Joint Compound		Convenient	None Detected
		Drywall		Convenient	None Detected
AZ1418.14-PLM-26	15	Orange Peel Drywall System - Peach Paint	Serving Area - Southeast	Convenient	None Detected
		Texture		Convenient	None Detected
		Peach Paint Layer #2		Convenient	None Detected
		White Compound		Convenient	None Detected
		Peach Paint Layer #3		Convenient	None Detected
		White Compound Layer #2		Convenient	None Detected
		Tape		Convenient	None Detected
		Joint Compound		Convenient	None Detected
		Drywall		Convenient	None Detected

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.14 / AZ1418.55			Client: Kyrene Elementary School District No. 28		
Sample Date(s): 3/6/2024 + 7/2/2025			Site: Kyrene Aprende Middle School - Multipurpose/Gym		
Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.14-PLM-27	15	Orange Peel Drywall System - Peach Paint	Dry Storage - Northeast	Convenient	None Detected
		Texture		Convenient	None Detected
		Peach Paint Layer #3		Convenient	None Detected
		White Compound		Convenient	None Detected
		Peach Paint Layer #4		Convenient	None Detected
		White Compound Layer #3		Convenient	None Detected
		Tape		Convenient	None Detected
		Joint Compound		Convenient	None Detected
		Drywall		Convenient	None Detected
AZ1418.14-PLM-28	16	Beige 12" x 12" VCT	Storage 2 - Northeast	Convenient	None Detected
	17	Yellow Mastic for Beige 12" x 12" VCT		Convenient	None Detected
AZ1418.14-PLM-29	16	Beige 12" x 12" VCT	Storage 1 - East	Convenient	None Detected
	17	Yellow Mastic for Beige 12" x 12" VCT		Convenient	None Detected
AZ1418.14-PLM-30	16	Beige 12" x 12" VCT	Dry Storage - Southwest	Convenient	None Detected
	17	Yellow Mastic for Beige 12" x 12" VCT		Convenient	None Detected
AZ1418.14-PLM-31	18	Blue Cove Base	Dry Storage - Northwest	Convenient	None Detected
	19	Yellow Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.14-PLM-32	18	Blue Cove Base	Storage 1 - Northwest	Convenient	None Detected
	19	Yellow Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.14-PLM-33	18	Blue Cove Base	Office - Northwest	Convenient	None Detected
	19	Yellow Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.14-PLM-34	20	White Window Frame Caulking	Hallway - Northwest of Office	Convenient	None Detected
	21	White Paint for Window Frame Caulking		Convenient	None Detected
AZ1418.14-PLM-35	20	White Window Frame Caulking	Hallway - North of Office	Convenient	None Detected
	21	White Paint for Window Frame Caulking		Convenient	None Detected
AZ1418.14-PLM-36	20	White Window Frame Caulking	Hallway - Northeast of Office	Convenient	None Detected
	21	White Paint for Window Frame Caulking		Convenient	None Detected
AZ1418.14-PLM-37	22	Black Window Glazing	Storage 1 - North	Convenient	None Detected
AZ1418.14-PLM-38		Black Window Glazing	Storage 1 - North	Convenient	None Detected
AZ1418.14-PLM-39		Black Window Glazing	Storage 1 - North	Convenient	None Detected

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.14 / AZ1418.55			Client: Kyrene Elementary School District No. 28		
Sample Date(s): 3/6/2024 + 7/2/2025			Site: Kyrene Aprende Middle School - Multipurpose/Gym		
Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.14-PLM-40	23	White Door Frame Caulking	Dry Storage - Southeast	Convenient	None Detected
	24	White Paint for Door Frame Caulking		Convenient	None Detected
AZ1418.14-PLM-41	23	White Door Frame Caulking	Office - Northeast	Convenient	None Detected
	24	White Paint for Door Frame Caulking		Convenient	None Detected
AZ1418.14-PLM-42	23	White Door Frame Caulking	Serving Area - Southwest	Convenient	None Detected
	24	White Paint for Door Frame Caulking		Convenient	None Detected
AZ1418.14-PLM-43	25	White Fixture Caulking	Restroom - Southwest	Convenient	None Detected
AZ1418.14-PLM-44		White Fixture Caulking	Restroom - Southwest	Convenient	None Detected
AZ1418.14-PLM-45		White Fixture Caulking	Restroom - Southwest	Convenient	None Detected
AZ1418.14-PLM-46	26	White 4" x 4" Ceramic Wall Tile	Restroom - Northwest	Convenient	None Detected
	27	Yellow Mastic for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ1418.14-PLM-47	26	White 4" x 4" Ceramic Wall Tile	Restroom - Northwest	Convenient	None Detected
	27	Yellow Mastic for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ1418.14-PLM-48	26	White 4" x 4" Ceramic Wall Tile	Restroom - Northwest	Convenient	None Detected
	27	Yellow Mastic for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ1418.14-PLM-49	28	Gray 4" x 4" Ceramic Wall Tile	Restroom - Northwest	Convenient	None Detected
	29	Yellow Mastic for Gray 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ1418.14-PLM-50	28	Gray 4" x 4" Ceramic Wall Tile	Restroom - Northwest	Convenient	None Detected
	29	Yellow Mastic for Gray 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ1418.14-PLM-51	28	Gray 4" x 4" Ceramic Wall Tile	Restroom - Northwest	Convenient	None Detected
	29	Yellow Mastic for Gray 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ1418.14-PLM-52	30	Tan 4" x 4" Ceramic Wall Tile	Restroom - Northwest	Convenient	None Detected
	31	White Mastic for Tan 4" x 4" Ceramic Wall Tile		Convenient	None Detected
	32	Mortar for Tan 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ1418.14-PLM-53	30	Tan 4" x 4" Ceramic Wall Tile	Restroom - Northwest	Convenient	None Detected
	31	White Mastic for Tan 4" x 4" Ceramic Wall Tile		Convenient	None Detected
	32	Mortar for Tan 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ1418.14-PLM-54	30	Tan 4" x 4" Ceramic Wall Tile	Restroom - Northwest	Convenient	None Detected
	31	White Mastic for Tan 4" x 4" Ceramic Wall Tile		Convenient	None Detected
	32	Mortar for Tan 4" x 4" Ceramic Wall Tile		Convenient	None Detected

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona



Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.14 / AZ1418.55			Client: Kyrene Elementary School District No. 28		
Sample Date(s): 3/6/2024 + 7/2/2025			Site: Kyrene Aprende Middle School - Multipurpose/Gym		
Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.14-PLM-55	33	Blue 4" x 4" Ceramic Wall Tile	Restroom - Northwest	Convenient	None Detected
AZ1418.14-PLM-56		Blue 4" x 4" Ceramic Wall Tile	Restroom - Northwest	Convenient	None Detected
AZ1418.14-PLM-57		Blue 4" x 4" Ceramic Wall Tile	Restroom - Northwest	Convenient	None Detected
AZ1418.14-PLM-58	34	Tan Grout	Restroom - Northwest	Convenient	None Detected
AZ1418.14-PLM-59		Tan Grout	Restroom - Northwest	Convenient	None Detected
AZ1418.14-PLM-60		Tan Grout	Restroom - Northwest	Convenient	None Detected
AZ1418.14-PLM-61	35	Gray 2" x 2" Ceramic Floor Tile	Restroom - Northwest	Convenient	None Detected
	36	Yellow Mastic for Gray 2" x 2" Ceramic Floor Tile		Convenient	None Detected
AZ1418.14-PLM-62	35	Gray 2" x 2" Ceramic Floor Tile	Restroom - Northwest	Convenient	None Detected
	36	Yellow Mastic for Gray 2" x 2" Ceramic Floor Tile		Convenient	None Detected
AZ1418.14-PLM-63	35	Gray 2" x 2" Ceramic Floor Tile	Restroom - Northwest	Convenient	None Detected
	36	Yellow Mastic for Gray 2" x 2" Ceramic Floor Tile		Convenient	None Detected
AZ1418.14-PLM-64	37	Gray Grout	Restroom - Northwest	Convenient	None Detected
AZ1418.14-PLM-65		Gray Grout	Restroom - Northwest	Convenient	None Detected
AZ1418.14-PLM-66		Gray Grout	Restroom - Northwest	Convenient	None Detected
AZ1418.14-PLM-67	38	2" x 2" Ceiling Tile	Kitchen - Center Northwest	Random	None Detected
AZ1418.14-PLM-68		2" x 2" Ceiling Tile	Kitchen - Center Southeast	Random	None Detected
AZ1418.14-PLM-69		2" x 2" Ceiling Tile	Kitchen - Southwest	Random	None Detected
AZ1418.14-PLM-70	39	2" x 2" Ceiling Tile	Dry Storage - Center	Random	None Detected
AZ1418.14-PLM-71		2" x 2" Ceiling Tile	Storage 1 - South	Random	None Detected
AZ1418.14-PLM-72		2" x 2" Ceiling Tile	Office - Center	Random	None Detected
AZ1418.14-PLM-73	40	Silver Duct Wrap	Kitchen - Center North	Convenient	None Detected
	41	Yellow Insulation for Silver Duct Wrap		Convenient	None Detected
AZ1418.14-PLM-74	40	Silver Duct Wrap	Kitchen - Southwest	Convenient	None Detected
	41	Yellow Insulation for Silver Duct Wrap		Convenient	None Detected
AZ1418.14-PLM-75	40	Silver Duct Wrap	Hallway - Northeast of Storage 2	Convenient	None Detected
	41	Yellow Insulation for Silver Duct Wrap		Convenient	None Detected

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.14 / AZ1418.55			Client: Kyrene Elementary School District No. 28		
Sample Date(s): 3/6/2024 + 7/2/2025			Site: Kyrene Aprende Middle School - Multipurpose/Gym		
Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 7/2/2025 - AHERA Building Inspectors: Isai Portillo (Certification: ON-188748-19438-121224)					
AZ1418.55-PLM-1	42	White 2' x 2' Ceiling Tile (Old)	Lobby - Southeast	Random	None Detected
AZ1418.55-PLM-2		White 2' x 2' Ceiling Tile (Old)	P.E. Storage - Southeast	Random	None Detected
AZ1418.55-PLM-3		White 2' x 2' Ceiling Tile (Old)	Corridor 01 - North	Random	None Detected
AZ1418.55-PLM-4	43	White 2' x 2' Ceiling Tile (New)	Strings 401 - Southeast	Random	None Detected
AZ1418.55-PLM-5		White 2' x 2' Ceiling Tile (New)	Strings 401 - Northwest	Random	None Detected
AZ1418.55-PLM-6		White 2' x 2' Ceiling Tile (New)	Strings 401 - Northeast	Random	None Detected
AZ1418.55-PLM-7	44	White Smooth 2' x 2' Ceiling Tile	Snack Bar - West	Random	None Detected
AZ1418.55-PLM-8		White Smooth 2' x 2' Ceiling Tile	Serving Area - West	Random	None Detected
AZ1418.55-PLM-9		White Smooth 2' x 2' Ceiling Tile	Kitchen - West	Random	None Detected
AZ1418.55-PLM-10	45	Beige w/ Tan Specks 12" x 12" VCT	Multipurpose - Southeast	Convenient	None Detected
	46	Tan Mastic for 12" x 12" VCT		Convenient	None Detected
AZ1418.55-PLM-11	45	Beige w/ Tan Specks 12" x 12" VCT	Corridor 03 - East	Convenient	None Detected
	46	Tan Mastic for 12" x 12" VCT		Convenient	None Detected
AZ1418.55-PLM-12	45	Beige w/ Tan Specks 12" x 12" VCT	P.E. Storage - North	Convenient	None Detected
	46	Tan Mastic for 12" x 12" VCT		Convenient	None Detected
AZ1418.55-PLM-13	47	Blue 4" Cove Base	Lobby - North	Convenient	None Detected
	48	Tan Mastic for Blue 4" Cove Base		Convenient	None Detected
AZ1418.55-PLM-14	47	Blue 4" Cove Base	Multipurpose - Southwest	Convenient	None Detected
	48	Tan Mastic for Blue 4" Cove Base		Convenient	None Detected
AZ1418.55-PLM-15	47	Blue 4" Cove Base	Band Room 353 - Southwest	Convenient	None Detected
	48	Tan Mastic for Blue 4" Cove Base		Convenient	None Detected
AZ1418.55-PLM-16	49	Blue/Gray 2' x 2' Carpet	Lobby - Southwest	Convenient	None Detected
	50	Brown Mastic for Multicolored Carpet		Convenient	None Detected
AZ1418.55-PLM-17	49	Blue/Gray 2' x 2' Carpet	Band Room 353 - North	Convenient	None Detected
	50	Brown Mastic for Multicolored Carpet		Convenient	None Detected
AZ1418.55-PLM-18	49	Blue/Gray 2' x 2' Carpet	Girls Coach Office - South	Convenient	None Detected
	50	Brown Mastic for Multicolored Carpet		Convenient	None Detected

Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona



Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.14 / AZ1418.55			Client: Kyrene Elementary School District No. 28		
Sample Date(s): 3/6/2024 + 7/2/2025			Site: Kyrene Aprende Middle School - Multipurpose/Gym		
Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.55-PLM-19	51	White Fixture Caulking	Boys Restroom 01 - East	Convenient	None Detected
AZ1418.55-PLM-20		White Fixture Caulking	Girls Restroom 01 - West	Convenient	None Detected
AZ1418.55-PLM-21		White Fixture Caulking	Girls Restroom - East	Convenient	None Detected
AZ1418.55-PLM-22	52	Brown Frame Sealant	Gymnasium - North	Convenient	None Detected
AZ1418.55-PLM-23		Brown Frame Sealant	Gymnasium - Northeast	Convenient	None Detected
AZ1418.55-PLM-24		Brown Frame Sealant	Gymnasium - Southeast	Convenient	None Detected



Inspector: Isai Portillo
Certificate Number: ON-188748-19438-121224
State: Arizona




SECTION 7



PLM BULK SAMPLE LOCATION MAPS

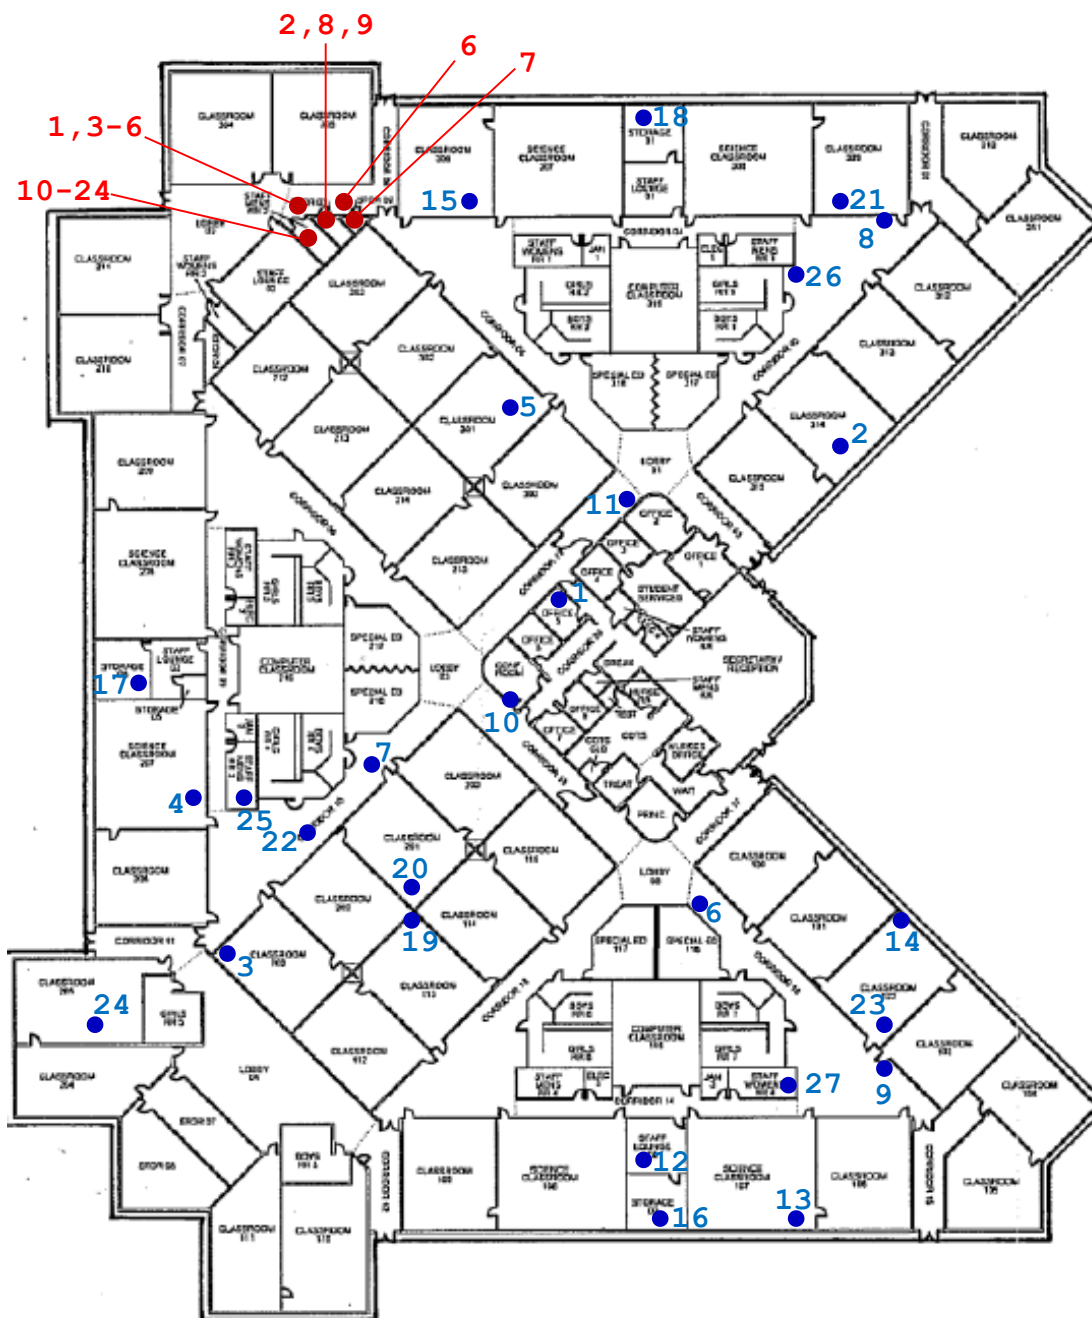

● Sample Date: 11/30/2020 ● Sample Date: 7/2/2025





PLM Sample Location Map
Kyrene Aprende Middle School
777 North Desert Breeze Blvd. E, Chandler, Arizona

Project No. AZ1418.55

Main Building

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

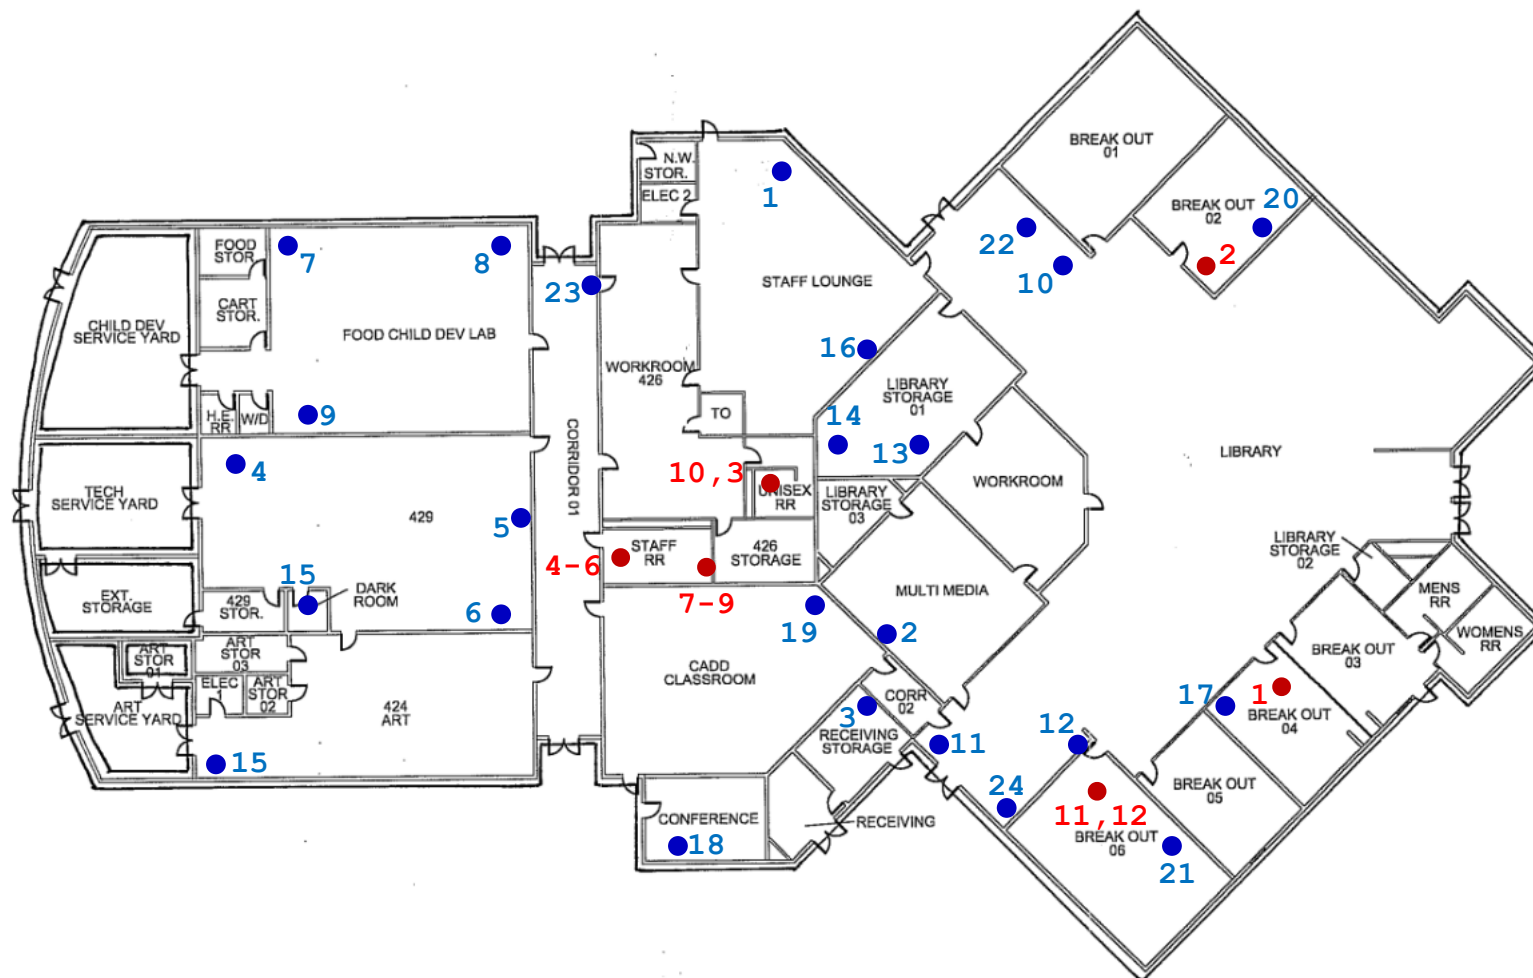

Sample Date: 3/13/2024





Sample Date: 7/2/2025

Site Plan
Kyrene Aprende Middle School
777 North Desert Breeze Blvd. E, Chandler, Arizona

Project No. AZ1418.55

Media Center

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

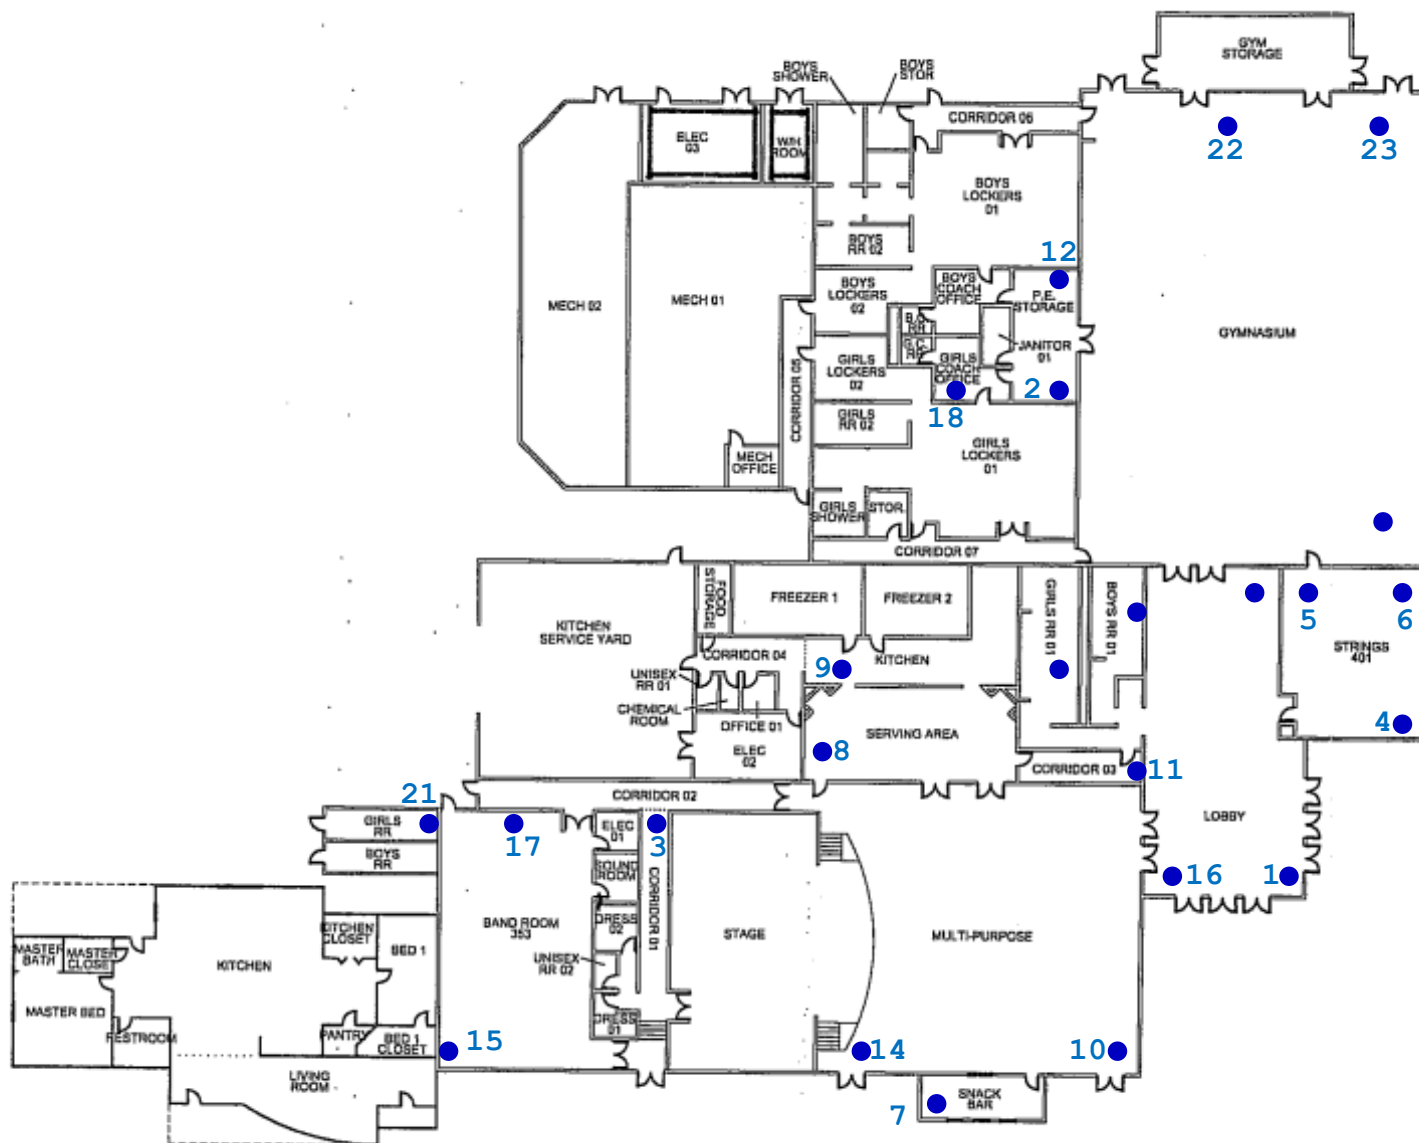



● Sample Date: July 2, 2025

PLM Sample Location Map
Kyrene Aprende Middle School
777 North Desert Breeze Blvd. E, Chandler, Arizona


Project No. AZ1418.55

Gym/Multi-Purpose

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

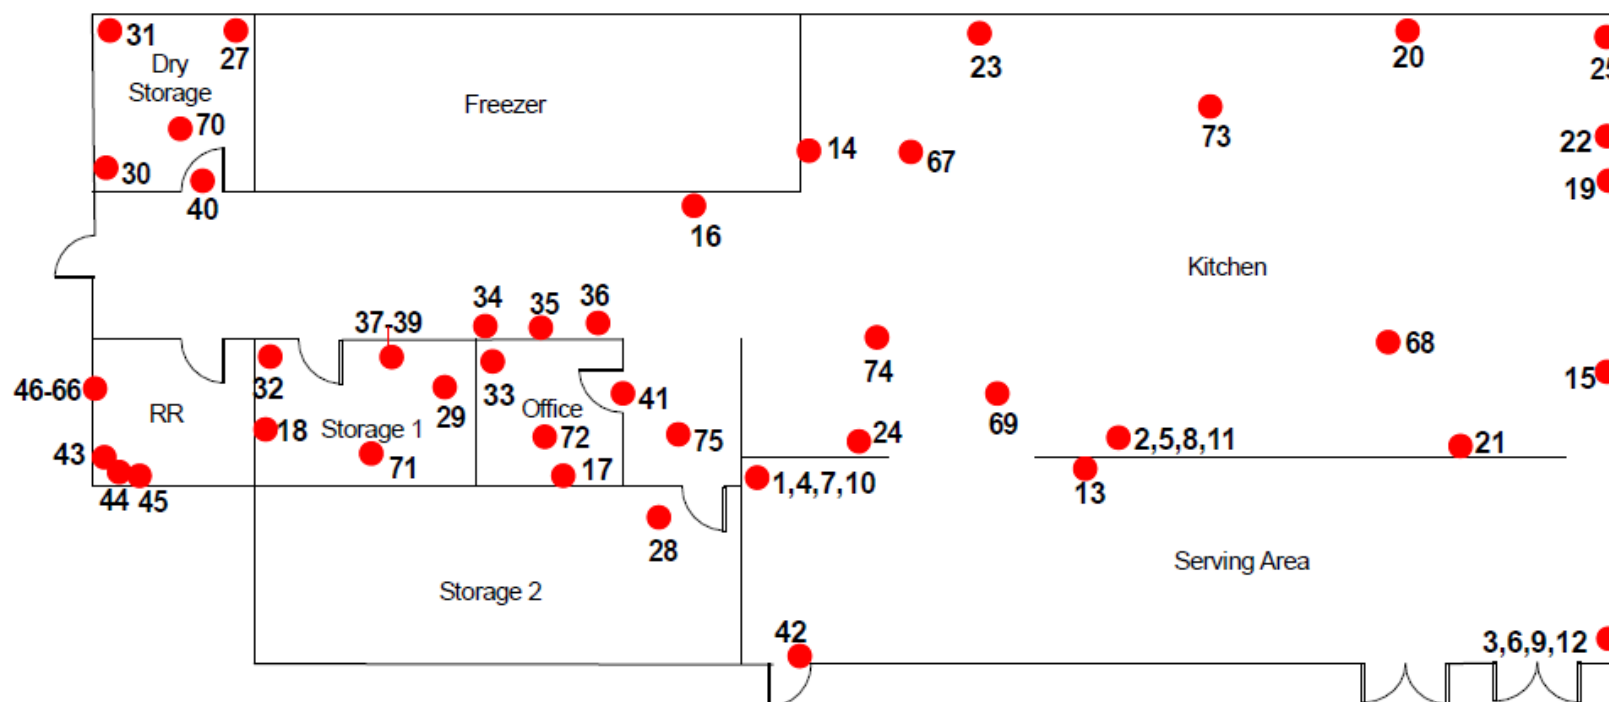

● Sample Date March 6, 2024



PLM Sample Location Map (Kitchen)
Kyrene Aprende Middle School
777 North Desert Breeze Blvd. E, Chandler, Arizona

Project No. AZ1418.55

Gym/Multi-Purpose

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

SECTION 8



PHYSICAL ASSESSMENT INFORMATION SHEETS

Project #: AZ1418.55	Client: Kyrene Elementary School District	Site: Aprende Middle School	Bldg. #: Main Building
-----------------------------	--	------------------------------------	-------------------------------

Bldg. #: Main Building

Material Description: Insulation for Silver Ceiling Wrap

Material Type: TSI Miscellaneous (Circle One) Surfacing

Material Location(s): Above Ceiling

G	1) Damaged or significantly damaged TSI ACBM	G	5) ACBM with potential for damage
G	2) Damaged friable surfacing ACBM	G	6) ACBM with potential for significant damage
G	3) Significantly damaged friable surfacing ACBM	🔴	7) Any remaining friable ACBM or friable suspect ACBM
G	4) Damaged or significantly damaged friable misc. ACBM		

Damage Type:										
G	Physical			G	Water		G	Air Erosion	G	Other
G	Vandalism			G	Vibration			None		
Damage Extent:										
	Low	<1% evenly; 10% locally		G	Moderate	<10% evenly; 10% - 25% locally		G	High	>10% evenly; >25% locally
Description of Damage: None, Assumed ACBM										

Preventative Measures: Low Potential for Disturbance														
Accessibility:		Low	Occupancy:	G	Low	Potential for Contact:		Low	Potential for Vibration:	G	Low	Potential for Air Erosion:	G	Low
	G	Moderate			Moderate		G	Moderate			Moderate			Moderate
	G	High		G	High		G	High		G	High		G	High

	1) Good condition with low potential for disturbance damage	G	5) Damaged condition with potential for disturbance damage
G	2) Good condition with potential for disturbance damage	G	6) Damaged condition with potential for significant disturbance damage
G	3) Good condition with potential for significant disturbance damage	G	7) Significant damage with potential for any disturbance
G	4) Damaged condition with low potential for disturbance damage		



Exp Date: December 12, 2025

Gracey Carpenter

Exp Date: July 11, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.55

Client: Kyrene Elementary School District

Site: Aprende Middle School

Bldg. #: Main Building

(HM) Material #:	74	Quantity of Material:	17,160 sq. ft.	Material in Air Plenum?	Yes No
Material Description:	Insulation for Silver Duct Wrap		Material Location(s):	Above Ceiling	
Material Type:	TSI Miscellaneous Surfacing (Circle One)				

Physical Assessment Categories

- | | |
|--|--|
| G 1) Damaged or significantly damaged TSI ACBM
G 2) Damaged friable surfacing ACBM
G 3) Significantly damaged friable surfacing ACBM
G 4) Damaged or significantly damaged friable misc. ACBM | G 5) ACBM with potential for damage
G 6) ACBM with potential for significant damage
■ 7) Any remaining friable ACBM or friable suspect ACBM |
|--|--|

Material Condition

Damage Type:	G	Physical	G	Water	G	Air Erosion	G	Other
	G	Vandalism	G	Vibration	■	None		
Damage Extent:	■	Low	<1% evenly; 10% locally	G	Moderate	<10% evenly; 10% - 25% locally	G	High
								>10% evenly; >25% locally
Description of Damage: None, Assumed ACBM								

Exposure Factors

■	Low	G	Low	■	Low	G	Low	G	Low
Accessibility:	G	Moderate	Occupancy:	■	Moderate	Potential for Contact:	G	Moderate	Potential for Air Erosion:
	G	High		G	High		G	High	■
									Moderate
									High
Preventative Measures: Low Potential for Disturbance									

Hazard Classification/Assessment Categories

- | | |
|--|--|
| ■ 1) Good condition with low potential for disturbance damage
G 2) Good condition with potential for disturbance damage
G 3) Good condition with potential for significant disturbance damage
G 4) Damaged condition with low potential for disturbance damage | G 5) Damaged condition with potential for disturbance damage
G 6) Damaged condition with potential for significant disturbance damage
G 7) Significant damage with potential for any disturbance |
|--|--|

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Tracey Carpenter

Certificate #: ON-4651-14588-071124

Signature:



State: Arizona

Exp Date: July 11, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.55

Client: Kyrene Elementary School District

Site: Aprende Middle School

Bldg. #: Main Building

(HM) Material #: 76 **Quantity of Material:** 9,500 sq. ft. **Material in Air Plenum?** Yes No

Material Description: Insulation for Silver Flex Duct Wrap

Material Location(s): Above Ceiling

Material Type: TSI Surfacing
Miscellaneous (Circle One)

Physical Assessment Categories

- | | |
|---|---|
| <p>G 1) Damaged or significantly damaged TSI ACBM</p> <p>G 2) Damaged friable surfacing ACBM</p> <p>G 3) Significantly damaged friable surfacing ACBM</p> <p>G 4) Damaged or significantly damaged friable misc. ACBM</p> | <p>G 5) ACBM with potential for damage</p> <p>G 6) ACBM with potential for significant damage</p> <p>■ 7) Any remaining friable ACBM or friable suspect ACBM</p> |
|---|---|

Material Condition

Damage Type: G Physical G Water G Air Erosion G Other
G Vandalism G Vibration ■ None

Damage Extent: ■ Low <1% evenly; 10% locally G Moderate <10% evenly; 10% - 25% locally G High >10% evenly; >25% locally

Description of Damage: None, Assumed ACBM

Exposure Factors

■ Low	G Low	■ Low	G Low	G Low
Accessibility: G Moderate	Occupancy: ■ Moderate	Potential for Contact: G Moderate	Potential for Vibration: ■ Moderate	Potential for Air Erosion: ■ Moderate
G High	G High	G High	G High	G High

Preventative Measures: Low Potential for Disturbance

Hazard Classification/Assessment Categories

- | | |
|---|---|
| <p>■ 1) Good condition with low potential for disturbance damage</p> <p>G 2) Good condition with potential for disturbance damage</p> <p>G 3) Good condition with potential for significant disturbance damage</p> <p>G 4) Damaged condition with low potential for disturbance damage</p> | <p>G 5) Damaged condition with potential for disturbance damage</p> <p>G 6) Damaged condition with potential for significant disturbance damage</p> <p>G 7) Significant damage with potential for any disturbance</p> |
|---|---|

Inspector: Isai Portillo

Management Planner: Tracey Carpenter

Certificate #: ON-188748-19438-121224

State: Arizona

Certificate #: ON-4651-14588-071124

State: Arizona

Signature:



Exp Date: December 12, 2025

Signature:



Exp Date: July 11, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.55

Client: Kyrene Elementary School District

Site: Aprende Middle School

Bldg. #: Main Building

(HM) Material #:	80	Quantity of Material:	2,600 sq. ft.	Material in Air Plenum?	Yes No
Material Description:	Insulation for White Pipe Wrap		Material Location(s):	Above Ceiling	
Material Type:	TSI Miscellaneous Surfacing (Circle One)				

Physical Assessment Categories

- | | |
|--|--|
| G 1) Damaged or significantly damaged TSI ACBM
G 2) Damaged friable surfacing ACBM
G 3) Significantly damaged friable surfacing ACBM
G 4) Damaged or significantly damaged friable misc. ACBM | G 5) ACBM with potential for damage
G 6) ACBM with potential for significant damage
■ 7) Any remaining friable ACBM or friable suspect ACBM |
|--|--|

Material Condition

Damage Type:	G	Physical	G	Water	G	Air Erosion	G	Other
	G	Vandalism	G	Vibration	■	None		
Damage Extent:	■	Low	<1% evenly; 10% locally	G	Moderate	<10% evenly; 10% - 25% locally	G	High
								>10% evenly; >25% locally
Description of Damage: None, Assumed ACBM								

Exposure Factors

■	Low	G	Low	■	Low	G	Low	G	Low
Accessibility:	G	Moderate	Occupancy:	■	Moderate	Potential for Contact:	G	Moderate	Potential for Air Erosion:
	G	High		G	High		G	High	■
									Moderate
									High
Preventative Measures: Low Potential for Disturbance									

Hazard Classification/Assessment Categories

- | | |
|--|--|
| ■ 1) Good condition with low potential for disturbance damage
G 2) Good condition with potential for disturbance damage
G 3) Good condition with potential for significant disturbance damage
G 4) Damaged condition with low potential for disturbance damage | G 5) Damaged condition with potential for disturbance damage
G 6) Damaged condition with potential for significant disturbance damage
G 7) Significant damage with potential for any disturbance |
|--|--|

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Tracey Carpenter

Certificate #: ON-4651-14588-071124

Signature:



State: Arizona

Exp Date: July 11, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.55

Client: Kyrene Elementary School District

Site: Aprende Middle School

Bldg. #: Main Building

(HM) Material #: 16 **Quantity of Material:** 300 sq. ft. **Material in Air Plenum?** Yes No

Material Description: Replacement 2'x2' Ceiling Tile

Material Location(s): Ceilings of Classrooms and Offices

Material Type: TSI Surfacing
Miscellaneous (Circle One)

Physical Assessment Categories

- | | |
|---|---|
| <p>G 1) Damaged or significantly damaged TSI ACBM</p> <p>G 2) Damaged friable surfacing ACBM</p> <p>G 3) Significantly damaged friable surfacing ACBM</p> <p>G 4) Damaged or significantly damaged friable misc. ACBM</p> | <p>G 5) ACBM with potential for damage</p> <p>G 6) ACBM with potential for significant damage</p> <p>■ 7) Any remaining friable ACBM or friable suspect ACBM</p> |
|---|---|

Material Condition

Damage Type:	G	Physical	G	Water	G	Air Erosion	G	Other
	G	Vandalism	G	Vibration	■	None		

Damage Extent:	■	Low	<1% evenly; 10% locally	G	Moderate	<10% evenly; 10% - 25% locally	G	High	>10% evenly; >25% locally
-----------------------	------------------------------------	-----	-------------------------	---	----------	--------------------------------	---	------	---------------------------

Description of Damage: None, Assumed ACBM

Exposure Factors

■	Low	G	Low	■	Low	G	Low	G	Low		
Accessibility:	G	Moderate	Occupancy:	■	Moderate	Potential for Contact:	G	Moderate	Potential for Air Erosion:	■	Moderate
	G	High		G	High		G	High		G	High

Preventative Measures: Low Potential for Disturbance

Hazard Classification/Assessment Categories

- | | |
|---|---|
| <p>■ 1) Good condition with low potential for disturbance damage</p> <p>G 2) Good condition with potential for disturbance damage</p> <p>G 3) Good condition with potential for significant disturbance damage</p> <p>G 4) Damaged condition with low potential for disturbance damage</p> | <p>G 5) Damaged condition with potential for disturbance damage</p> <p>G 6) Damaged condition with potential for significant disturbance damage</p> <p>G 7) Significant damage with potential for any disturbance</p> |
|---|---|

Inspector: Isai Portillo

Management Planner: Tracey Carpenter

Certificate #: ON-188748-19438-121224

State: Arizona

Certificate #: ON-4651-14588-071124

State: Arizona

Signature:



Exp Date: December 12, 2025

Signature:



Exp Date: July 11, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.55	Client: Kyrene Elementary School District	Site: Aprende Middle School	Bldg. #: Main Building
(HM) Material #: 15	Quantity of Material: 65,000 sq. ft.	Material in Air Plenum? Yes No	
Material Description: White 2'x2' Ceiling Tile	Material Location(s): Ceilings of Classrooms and Offices		
Material Type: TSI Miscellaneous (Circle One) Surfacing			

Physical Assessment Categories			
G	1) Damaged or significantly damaged TSI ACBM	G	5) ACBM with potential for damage
G	2) Damaged friable surfacing ACBM	G	6) ACBM with potential for significant damage
G	3) Significantly damaged friable surfacing ACBM	■	7) Any remaining friable ACBM or friable suspect ACBM
G	4) Damaged or significantly damaged friable misc. ACBM		

Material Condition									
Damage Type:	G	Physical	G	Water	G	Air Erosion	G	Other	
	G	Vandalism	G	Vibration	■	None			
Damage Extent:	■	Low	<1% evenly; 10% locally	G	Moderate	<10% evenly; 10% - 25% locally	G	High	>10% evenly; >25% locally
Description of Damage: None, Assumed ACBM									

Exposure Factors											
	■	Low		G	Low		■	Low		G	Low
Accessibility:	G	Moderate	Occupancy:	■	Moderate	Potential for Contact:	G	Moderate	Potential for Vibration:	■	Moderate
	G	High		G	High		G	High		G	High
Preventative Measures: Low Potential for Disturbance											

Hazard Classification/Assessment Categories			
■	1) Good condition with low potential for disturbance damage	G	5) Damaged condition with potential for disturbance damage
G	2) Good condition with potential for disturbance damage	G	6) Damaged condition with potential for significant disturbance damage
G	3) Good condition with potential for significant disturbance damage	G	7) Significant damage with potential for any disturbance
G	4) Damaged condition with low potential for disturbance damage		

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Tracey Carpenter

Certificate #: ON-4651-14588-071124

Signature:



State: Arizona

Exp Date: July 11, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.55

Client: Kyrene Elementary School District

Site: Aprende Middle School

Bldg. #: Media Center

(HM) Material #: 67 **Quantity of Material:** 4,300 sq. ft. **Material in Air Plenum?** Yes No

Material Description: Insulation for Ceiling Wrap

Material Location(s): Above Ceiling

Material Type: TSI Surfacing
Miscellaneous (Circle One)

Physical Assessment Categories

- | | |
|---|---|
| <p>G 1) Damaged or significantly damaged TSI ACBM</p> <p>G 2) Damaged friable surfacing ACBM</p> <p>G 3) Significantly damaged friable surfacing ACBM</p> <p>G 4) Damaged or significantly damaged friable misc. ACBM</p> | <p>G 5) ACBM with potential for damage</p> <p>G 6) ACBM with potential for significant damage</p> <p>■ 7) Any remaining friable ACBM or friable suspect ACBM</p> |
|---|---|

Material Condition

Damage Type: G Physical G Water G Air Erosion G Other
G Vandalism G Vibration ■ None

Damage Extent: ■ Low <1% evenly; 10% locally G Moderate <10% evenly; 10% - 25% locally G High >10% evenly; >25% locally

Description of Damage: None, Assumed ACBM

Exposure Factors

■ Low	G Low	■ Low	G Low	G Low	G Low
Accessibility: G Moderate	Occupancy: ■ Moderate	Potential for Contact: G Moderate	Potential for Vibration: ■ Moderate	Potential for Air Erosion: ■ Moderate	
G High	G High	G High	G High	G High	

Preventative Measures: Low Potential for Disturbance

Hazard Classification/Assessment Categories

- | | |
|---|---|
| <p>■ 1) Good condition with low potential for disturbance damage</p> <p>G 2) Good condition with potential for disturbance damage</p> <p>G 3) Good condition with potential for significant disturbance damage</p> <p>G 4) Damaged condition with low potential for disturbance damage</p> | <p>G 5) Damaged condition with potential for disturbance damage</p> <p>G 6) Damaged condition with potential for significant disturbance damage</p> <p>G 7) Significant damage with potential for any disturbance</p> |
|---|---|

Inspector: Isai Portillo

Management Planner: Tracey Carpenter

Certificate #: ON-188748-19438-121224

State: Arizona

Certificate #: ON-4651-14588-071124

State: Arizona

Signature:



Exp Date: December 12, 2025

Signature:



Exp Date: July 11, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.55

Client: Kyrene Elementary School District

Site: Aprende Middle School

Bldg. #: Media Center

(HM) Material #:	72	Quantity of Material:	1,920 sq. ft.	Material in Air Plenum?	Yes No
Material Description:	Insulation for Silver Duct Wrap		Material Location(s):	Above Ceiling	
Material Type:	TSI Surfacing Miscellaneous (Circle One)				

Physical Assessment Categories

- | | |
|--|--|
| G 1) Damaged or significantly damaged TSI ACBM
G 2) Damaged friable surfacing ACBM
G 3) Significantly damaged friable surfacing ACBM
G 4) Damaged or significantly damaged friable misc. ACBM | G 5) ACBM with potential for damage
G 6) ACBM with potential for significant damage
■ 7) Any remaining friable ACBM or friable suspect ACBM |
|--|--|

Material Condition

Damage Type:	G	Physical	G	Water	G	Air Erosion	G	Other
	G	Vandalism	G	Vibration	■	None		
Damage Extent:	■	Low	<1% evenly; 10% locally	G	Moderate	<10% evenly; 10% - 25% locally	G	High
								>10% evenly; >25% locally
Description of Damage: None, Assumed ACBM								

Exposure Factors

■	Low	G	Low	■	Low	G	Low	G	Low
Accessibility:	G	Moderate	Occupancy:	■	Moderate	Potential for Contact:	G	Moderate	Potential for Air Erosion:
	G	High		G	High		G	High	■
									Moderate
									High
Preventative Measures: Low Potential for Disturbance									

Hazard Classification/Assessment Categories

- | | |
|--|--|
| ■ 1) Good condition with low potential for disturbance damage
G 2) Good condition with potential for disturbance damage
G 3) Good condition with potential for significant disturbance damage
G 4) Damaged condition with low potential for disturbance damage | G 5) Damaged condition with potential for disturbance damage
G 6) Damaged condition with potential for significant disturbance damage
G 7) Significant damage with potential for any disturbance |
|--|--|

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Tracey Carpenter

Certificate #: ON-4651-14588-071124

Signature:



State: Arizona

Exp Date: July 11, 2025

Project #: AZ1418.55	Client: Kyrene Elementary School District	Site: Aprende Middle School	Bldg. #: Main Building
-----------------------------	--	------------------------------------	-------------------------------

Physical Assessment Categories			
G	1) Damaged or significantly damaged TSI ACBM	G	5) ACBM with potential for damage
G	2) Damaged friable surfacing ACBM	G	6) ACBM with potential for significant damage
G	3) Significantly damaged friable surfacing ACBM		7) Any remaining friable ACBM or friable suspect ACBM
G	4) Damaged or significantly damaged friable misc. ACBM		

Material Condition											
Damage Type:	G	Physical		G	Water		G	Air Erosion		G	Other
	G	Vandalism		G	Vibration			None			
Damage Extent:		Low	<1% evenly; 10% locally	G	Moderate	<10% evenly; 10% - 25% locally	G	High	>10% evenly; >25% locally		
Description of Damage: None, Assumed ACBM											

Exposure Factors													
Accessibility:		Low	G	Low	Potential for Contact:		Low	Potential for Vibration:	G	Low	Potential for Air Erosion:	G	Low
	G	Moderate		Moderate		G	Moderate			Moderate			Moderate
	G	High	G	High		G	High		G	High		G	High
Preventative Measures: Low Potential for Disturbance													

Hazard Classification/Assessment Categories			
1) Good condition with low potential for disturbance damage	G	5) Damaged condition with potential for disturbance damage	
2) Good condition with potential for disturbance damage	G	6) Damaged condition with potential for significant disturbance damage	
3) Good condition with potential for significant disturbance damage	G	7) Significant damage with potential for any disturbance	
4) Damaged condition with low potential for disturbance damage			

Exp Date: July 11, 2025

Project #: AZ1418.55	Client: Kyrene Elementary School District	Site: Aprende Middle School	Bldg. #: Media Center
-----------------------------	--	------------------------------------	------------------------------

Bldg. #: Media Center

Material Type: ☒ TSI ☐ Surfacing
☐ Miscellaneous ☐ (Circle One)

Physical Assessment Categories	
Cardiovascular	Heart rate, blood pressure, peripheral pulses, jugular venous pressure, heart sounds (S1, S2, murmurs, gallops, crackles), capillary refill, skin color, temperature, edema.
Respiratory	Respiratory rate, depth, effort, chest expansion, tracheal position, breath sounds (crackles, wheezes, rhales, decreased/absent sounds), egophony, hyperresonance, dullness, cyanosis, clubbing.
Neurological	Level of consciousness, orientation, speech, motor function (strength, tone, reflexes, coordination, gait), sensory function (pain, temperature, vibration, proprioception), cranial nerves (I-VIII), deep tendon reflexes (biceps, brachioradialis, triceps, patellar, Achilles), plantar reflexes.
Musculoskeletal	Inspection (posture, deformities, swelling, bruising), palpation (tenderness, warmth, swelling, muscle wasting), range of motion (active and passive), strength testing, special tests (e.g., Lachman, McMurray, Tinel's, Phalen's).
Genitourinary	Inspection (perineal area, genitalia), palpation (testes, prostate, pelvic floor), auscultation (renal bruit), percussion (costovertebral angle tenderness).
Endocrine	Inspection (thyroid, goiter, Cushing's features, acromegaly features), palpation (thyroid, breast lumps, gynecomastia), auscultation (bruits over thyroid).
Integumentary	Inspection (skin color, texture, lesions, rashes, ulcers, edema), palpation (temperature, moisture, turgor, texture).
Other	Height, weight, BMI, vital signs (temperature, pulse, respiration, blood pressure), hydration status, nutritional status.

G	5) ACBM with potential for damage
G	6) ACBM with potential for significant damage
	7) Any remaining friable ACBM or friable suspect ACBM

Material Condition	
--------------------	--

Description of Damage: None, Assumed ACBM

Exposure Factors	
------------------	--

Preventative Measures: Low Potential for Disturbance

Hazard Classification/Assessment Categories	
---	--

G	5) Damaged condition with potential for disturbance damage
G	6) Damaged condition with potential for significant disturbance damage
G	7) Significant damage with potential for any disturbance

Exp Date: July 11, 2025

Gracey Carpenter

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.55	Client: Kyrene Elementary School District	Site: Aprende Middle School	Bldg. #: Media Center
-----------------------------	--	------------------------------------	------------------------------

(HM) Material #: 11 Material Description: White 2'x2' Ceiling Tile (New) Material Type: TSI Surfacing Miscellaneous (Circle One)	Quantity of Material: 1,900 sq. ft. Material Location(s): Throughout Material in Air Plenum? Yes No
---	--

Physical Assessment Categories			
G	1) Damaged or significantly damaged TSI ACBM	G	5) ACBM with potential for damage
G	2) Damaged friable surfacing ACBM	G	6) ACBM with potential for significant damage
G	3) Significantly damaged friable surfacing ACBM	■	7) Any remaining friable ACBM or friable suspect ACBM
G	4) Damaged or significantly damaged friable misc. ACBM		

Material Condition									
Damage Type:	G	Physical	G	Water	G	Air Erosion	G	Other	
	G	Vandalism	G	Vibration	■	None			
Damage Extent:	■	Low	<1% evenly; 10% locally	G	Moderate	<10% evenly; 10% - 25% locally	G	High	>10% evenly; >25% locally
Description of Damage: None, Assumed ACBM									

Exposure Factors											
	■	Low		G	Low		■	Low		G	Low
Accessibility:	G	Moderate	Occupancy:	■	Moderate	Potential for Contact:	G	Moderate	Potential for Vibration:	■	Moderate
	G	High		G	High		G	High		G	High
Preventative Measures: Low Potential for Disturbance											

Hazard Classification/Assessment Categories			
■	1) Good condition with low potential for disturbance damage	G	5) Damaged condition with potential for disturbance damage
G	2) Good condition with potential for disturbance damage	G	6) Damaged condition with potential for significant disturbance damage
G	3) Good condition with potential for significant disturbance damage	G	7) Significant damage with potential for any disturbance
G	4) Damaged condition with low potential for disturbance damage		

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Tracey Carpenter

Certificate #: ON-4651-14588-071124

Signature:



State: Arizona

Exp Date: July 11, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.55	Client: Kyrene Elementary School District	Site: Aprende Middle School	Bldg. #: Media Center
-----------------------------	--	------------------------------------	------------------------------

(HM) Material #: 10 Material Description: White 2'x2' Ceiling Tile (Old) Material Type: TSI Surfacing Miscellaneous (Circle One)	Quantity of Material: 10,400 sq. ft. Material Location(s): Throughout Material in Air Plenum? Yes No
---	---

Physical Assessment Categories			
G	1) Damaged or significantly damaged TSI ACBM	G	5) ACBM with potential for damage
G	2) Damaged friable surfacing ACBM	G	6) ACBM with potential for significant damage
G	3) Significantly damaged friable surfacing ACBM	■	7) Any remaining friable ACBM or friable suspect ACBM
G	4) Damaged or significantly damaged friable misc. ACBM		

Material Condition									
Damage Type:	G	Physical	G	Water	G	Air Erosion	G	Other	
	G	Vandalism	G	Vibration	■	None			
Damage Extent:	■	Low	<1% evenly; 10% locally	G	Moderate	<10% evenly; 10% - 25% locally	G	High	>10% evenly; >25% locally
Description of Damage: None, Assumed ACBM									

Exposure Factors											
	■	Low		G	Low		■	Low		G	Low
Accessibility:	G	Moderate	Occupancy:	■	Moderate	Potential for Contact:	G	Moderate	Potential for Vibration:	■	Moderate
	G	High		G	High		G	High		G	High
Preventative Measures: Low Potential for Disturbance											

Hazard Classification/Assessment Categories			
■	1) Good condition with low potential for disturbance damage	G	5) Damaged condition with potential for disturbance damage
G	2) Good condition with potential for disturbance damage	G	6) Damaged condition with potential for significant disturbance damage
G	3) Good condition with potential for significant disturbance damage	G	7) Significant damage with potential for any disturbance
G	4) Damaged condition with low potential for disturbance damage		

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:

State: Arizona

Exp Date: December 12, 2025

Management Planner: Tracey Carpenter

Certificate #: ON-4651-14588-071124

Signature:

State: Arizona

Exp Date: July 11, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.55	Client: Kyrene Elementary School District	Site: Aprende Middle School	Bldg. #: Media Center
(HM) Material #: 12	Quantity of Material: 1,850 sq. ft.	Material in Air Plenum? Yes No	
Material Description: White Smooth 2'x2' Ceiling Tile	Material Location(s): Throughout		
Material Type: TSI Surfacing Miscellaneous (Circle One)			

Physical Assessment Categories			
G	1) Damaged or significantly damaged TSI ACBM	G	5) ACBM with potential for damage
G	2) Damaged friable surfacing ACBM	G	6) ACBM with potential for significant damage
G	3) Significantly damaged friable surfacing ACBM	G	7) Any remaining friable ACBM or friable suspect ACBM
G	4) Damaged or significantly damaged friable misc. ACBM		

Material Condition									
Damage Type:	G	Physical	G	Water	G	Air Erosion	G	Other	
	G	Vandalism	G	Vibration	G	None			
Damage Extent:	G	Low	<1% evenly; 10% locally	G	Moderate	<10% evenly; 10% - 25% locally	G	High	>10% evenly; >25% locally
Description of Damage: None, Assumed ACBM									

Exposure Factors											
	G	Low		G	Low		G	Low		G	Low
Accessibility:	G	Moderate	Occupancy:	G	Moderate	Potential for Contact:	G	Moderate	Potential for Vibration:	G	Moderate
	G	High		G	High		G	High		G	High
Preventative Measures: Low Potential for Disturbance											

Hazard Classification/Assessment Categories			
G	1) Good condition with low potential for disturbance damage	G	5) Damaged condition with potential for disturbance damage
G	2) Good condition with potential for disturbance damage	G	6) Damaged condition with potential for significant disturbance damage
G	3) Good condition with potential for significant disturbance damage	G	7) Significant damage with potential for any disturbance
G	4) Damaged condition with low potential for disturbance damage		

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Tracey Carpenter

Certificate #: ON-4651-14588-071124

Signature:



State: Arizona

Exp Date: July 11, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.55	Client: Kyrene Elementary School District	Site: Aprende Middle School	Bldg. #: Media Center
-----------------------------	--	------------------------------------	------------------------------

(HM) Material #: 13 Material Description: White Textured 2'x2' Ceiling Tile Material Type: TSI Surfacing Miscellaneous (Circle One)	Quantity of Material: 675 sq. ft. Material in Air Plenum? Yes No Material Location(s): Ceiling (Library Entrance)
--	---

Physical Assessment Categories			
G	1) Damaged or significantly damaged TSI ACBM	G	5) ACBM with potential for damage
G	2) Damaged friable surfacing ACBM	G	6) ACBM with potential for significant damage
G	3) Significantly damaged friable surfacing ACBM	■	7) Any remaining friable ACBM or friable suspect ACBM
G	4) Damaged or significantly damaged friable misc. ACBM		

Material Condition									
Damage Type:	G	Physical	G	Water	G	Air Erosion	G	Other	
	G	Vandalism	G	Vibration	■	None			
Damage Extent:	■	Low	<1% evenly; 10% locally	G	Moderate	<10% evenly; 10% - 25% locally	G	High	>10% evenly; >25% locally
Description of Damage: None, Assumed ACBM									

Exposure Factors											
	■	Low		G	Low		■	Low		G	Low
Accessibility:	G	Moderate	Occupancy:	■	Moderate	Potential for Contact:	G	Moderate	Potential for Vibration:	■	Moderate
	G	High		G	High		G	High		G	High
Preventative Measures: Low Potential for Disturbance											

Hazard Classification/Assessment Categories			
■	1) Good condition with low potential for disturbance damage	G	5) Damaged condition with potential for disturbance damage
G	2) Good condition with potential for disturbance damage	G	6) Damaged condition with potential for significant disturbance damage
G	3) Good condition with potential for significant disturbance damage	G	7) Significant damage with potential for any disturbance
G	4) Damaged condition with low potential for disturbance damage		

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Tracey Carpenter

Certificate #: ON-4651-14588-071124

Signature:



State: Arizona

Exp Date: July 11, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.55	Client: Kyrene Elementary School District	Site: Aprende Middle School	Bldg. #: Multi-Purpose
(HM) Material #: 43	Quantity of Material: 1,200 sq. ft.	Material in Air Plenum? Yes No	
Material Description: White 2'x2' Ceiling Tile (New)	Material Location(s): Ceilings in Classrooms		
Material Type: TSI Miscellaneous Surfacing (Circle One)			

Physical Assessment Categories			
G	1) Damaged or significantly damaged TSI ACBM	G	5) ACBM with potential for damage
G	2) Damaged friable surfacing ACBM	G	6) ACBM with potential for significant damage
G	3) Significantly damaged friable surfacing ACBM	■	7) Any remaining friable ACBM or friable suspect ACBM
G	4) Damaged or significantly damaged friable misc. ACBM		

Material Condition									
Damage Type:	G	Physical	G	Water	G	Air Erosion	G	Other	
	G	Vandalism	G	Vibration	■	None			
Damage Extent:	■	Low	<1% evenly; 10% locally	G	Moderate	<10% evenly; 10% - 25% locally	G	High	>10% evenly; >25% locally
Description of Damage: None, Assumed ACBM									

Exposure Factors											
	■	Low		G	Low		■	Low		G	Low
Accessibility:	G	Moderate	Occupancy:	■	Moderate	Potential for Contact:	G	Moderate	Potential for Vibration:	■	Moderate
	G	High		G	High		G	High		G	High
Preventative Measures: Low Potential for Disturbance											

Hazard Classification/Assessment Categories			
■	1) Good condition with low potential for disturbance damage	G	5) Damaged condition with potential for disturbance damage
G	2) Good condition with potential for disturbance damage	G	6) Damaged condition with potential for significant disturbance damage
G	3) Good condition with potential for significant disturbance damage	G	7) Significant damage with potential for any disturbance
G	4) Damaged condition with low potential for disturbance damage		

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Tracey Carpenter

Certificate #: ON-4651-14588-071124

Signature:



State: Arizona

Exp Date: July 11, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.55	Client: Kyrene Elementary School District	Site: Aprende Middle School	Bldg. #: Multi-Purpose
(HM) Material #: 42	Quantity of Material: 7,300 sq. ft ..	Material in Air Plenum? Yes No	
Material Description: White 2'x2' Ceiling Tile (Old)	Material Location(s): Above Ceilings in Classrooms		
Material Type: TSI Miscellaneous Surfacing (Circle One)			

Physical Assessment Categories			
G	1) Damaged or significantly damaged TSI ACBM	G	5) ACBM with potential for damage
G	2) Damaged friable surfacing ACBM	G	6) ACBM with potential for significant damage
G	3) Significantly damaged friable surfacing ACBM	■	7) Any remaining friable ACBM or friable suspect ACBM
G	4) Damaged or significantly damaged friable misc. ACBM		

Material Condition									
Damage Type:	G	Physical	G	Water	G	Air Erosion	G	Other	
	G	Vandalism	G	Vibration	■	None			
Damage Extent:	■	Low	<1% evenly; 10% locally	G	Moderate	<10% evenly; 10% - 25% locally	G	High	>10% evenly; >25% locally
Description of Damage: None, Assumed ACBM									

Exposure Factors									
	■	Low		G	Low		■	Low	
Accessibility:	G	Moderate	Occupancy:	■	Moderate	Potential for Contact:	G	Moderate	Potential for Air Erosion:
	G	High		G	High		G	High	
Preventative Measures: Low Potential for Disturbance									

Hazard Classification/Assessment Categories			
■	1) Good condition with low potential for disturbance damage	G	5) Damaged condition with potential for disturbance damage
G	2) Good condition with potential for disturbance damage	G	6) Damaged condition with potential for significant disturbance damage
G	3) Good condition with potential for significant disturbance damage	G	7) Significant damage with potential for any disturbance
G	4) Damaged condition with low potential for disturbance damage		

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Tracey Carpenter

Certificate #: ON-4651-14588-071124

Signature:



State: Arizona

Exp Date: July 11, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.55	Client: Kyrene Elementary School District	Site: Aprende Middle School	Bldg. #: Multi-Purpose
(HM) Material #: 121	Quantity of Material: 300 sq. ft.	Material in Air Plenum? Yes No	
Material Description: Insulation for Pipe Wrap	Material Location(s): Above Ceilings		
Material Type: TSI Surfacing Miscellaneous (Circle One)			

Physical Assessment Categories			
G	1) Damaged or significantly damaged TSI ACBM	G	5) ACBM with potential for damage
G	2) Damaged friable surfacing ACBM	G	6) ACBM with potential for significant damage
G	3) Significantly damaged friable surfacing ACBM	■	7) Any remaining friable ACBM or friable suspect ACBM
G	4) Damaged or significantly damaged friable misc. ACBM		

Material Condition									
Damage Type:	G	Physical	G	Water	G	Air Erosion	G	Other	
	G	Vandalism	G	Vibration	■	None			
Damage Extent:	■	Low	<1% evenly; 10% locally	G	Moderate	<10% evenly; 10% - 25% locally	G	High	>10% evenly; >25% locally
Description of Damage: None, Assumed ACBM									

Exposure Factors											
	■	Low		G	Low		■	Low		G	Low
Accessibility:	G	Moderate	Occupancy:	■	Moderate	Potential for Contact:	G	Moderate	Potential for Vibration:	■	Moderate
	G	High		G	High		G	High		G	High
Preventative Measures: Low Potential for Disturbance											

Hazard Classification/Assessment Categories			
■	1) Good condition with low potential for disturbance damage	G	5) Damaged condition with potential for disturbance damage
G	2) Good condition with potential for disturbance damage	G	6) Damaged condition with potential for significant disturbance damage
G	3) Good condition with potential for significant disturbance damage	G	7) Significant damage with potential for any disturbance
G	4) Damaged condition with low potential for disturbance damage		

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Tracey Carpenter

Certificate #: ON-4651-14588-071124

Signature:



State: Arizona

Exp Date: July 11, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.55	Client: Kyrene Elementary School District	Site: Aprende Middle School	Bldg. #: Multi-Purpose
(HM) Material #: 116	Quantity of Material: 900 sq. ft.	Material in Air Plenum? Yes No	
Material Description: Insulation for Silver Flex Duct Wrap		Material Location(s): Above Ceilings	
Material Type: TSI Surfacing Miscellaneous (Circle One)			

Physical Assessment Categories			
G	1) Damaged or significantly damaged TSI ACBM	G	5) ACBM with potential for damage
G	2) Damaged friable surfacing ACBM	G	6) ACBM with potential for significant damage
G	3) Significantly damaged friable surfacing ACBM	■	7) Any remaining friable ACBM or friable suspect ACBM
G	4) Damaged or significantly damaged friable misc. ACBM		

Material Condition									
Damage Type:	G	Physical	G	Water	G	Air Erosion	G	Other	
	G	Vandalism	G	Vibration	■	None			
Damage Extent:	■	Low	<1% evenly; 10% locally	G	Moderate	<10% evenly; 10% - 25% locally	G	High	>10% evenly; >25% locally
Description of Damage: None, Assumed ACBM									

Exposure Factors											
	■	Low		G	Low		■	Low		G	Low
Accessibility:	G	Moderate	Occupancy:	■	Moderate	Potential for Contact:	G	Moderate	Potential for Vibration:	■	Moderate
	G	High		G	High		G	High		G	High
Preventative Measures: Low Potential for Disturbance											

Hazard Classification/Assessment Categories			
■	1) Good condition with low potential for disturbance damage	G	5) Damaged condition with potential for disturbance damage
G	2) Good condition with potential for disturbance damage	G	6) Damaged condition with potential for significant disturbance damage
G	3) Good condition with potential for significant disturbance damage	G	7) Significant damage with potential for any disturbance
G	4) Damaged condition with low potential for disturbance damage		

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Tracey Carpenter

Certificate #: ON-4651-14588-071124

Signature:



State: Arizona

Exp Date: July 11, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.55	Client: Kyrene Elementary School District	Site: Aprende Middle School	Bldg. #: Multi-Purpose
(HM) Material #: 44	Quantity of Material: 2,000 sq. ft.	Material in Air Plenum? Yes No	
Material Description: White Smooth 2'x2' Ceiling Tile		Material Location(s): Ceilings in Snack Bar and Serving Area	
Material Type: TSI Miscellaneous Surfacing (Circle One)			

Physical Assessment Categories			
G	1) Damaged or significantly damaged TSI ACBM	G	5) ACBM with potential for damage
G	2) Damaged friable surfacing ACBM	G	6) ACBM with potential for significant damage
G	3) Significantly damaged friable surfacing ACBM	■	7) Any remaining friable ACBM or friable suspect ACBM
G	4) Damaged or significantly damaged friable misc. ACBM		

Material Condition									
Damage Type:	G	Physical	G	Water	G	Air Erosion	G	Other	
	G	Vandalism	G	Vibration	■	None			
Damage Extent:	■	Low	<1% evenly; 10% locally	G	Moderate	<10% evenly; 10% - 25% locally	G	High	>10% evenly; >25% locally
Description of Damage: None, Assumed ACBM									

Exposure Factors											
	■	Low		G	Low		■	Low		G	Low
Accessibility:	G	Moderate	Occupancy:	■	Moderate	Potential for Contact:	G	Moderate	Potential for Vibration:	■	Moderate
	G	High		G	High		G	High		G	High
Preventative Measures: Low Potential for Disturbance											

Hazard Classification/Assessment Categories			
■	1) Good condition with low potential for disturbance damage	G	5) Damaged condition with potential for disturbance damage
G	2) Good condition with potential for disturbance damage	G	6) Damaged condition with potential for significant disturbance damage
G	3) Good condition with potential for significant disturbance damage	G	7) Significant damage with potential for any disturbance
G	4) Damaged condition with low potential for disturbance damage		

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Tracey Carpenter

Certificate #: ON-4651-14588-071124

Signature:



State: Arizona

Exp Date: July 11, 2025

SECTION 9



LABORATORY REPORTS

Aerobiology Client		c395 Dominion Environmental Consultants, Inc.		AZ, CA, CO, FL, GA, NJ, VA		AZ, CA, CO, VA		GA, NJ, VA	
Field Contact		Nick Marcos		Collected By/Date:		NM 11/30/20		Relinquished By/Date:	
Reporting Address		20045 N. 19th Ave Building 7 Phoenix AZ 85027		Relinquished By/Date:				Received By/Date:	
Billing Address		20045 N. 19th Ave Building 7 Phoenix AZ 85027		Sampler Type		Andersen SAS		Sample Aire Aero Trap	
Phone/Fax		623-516-1414		PO# Job#:		JH A20959.2613 PO: 262266			
Reporting Email(s)		nmarcos@dominion-env.com		Project Name:		Kyrene Aprende Middle School			
Routine		☐ 24 Hour ☒ Same Day ☐ 4 Hour ☐ 2 Hour		Notes:					
SAMPLING LOCATION ZIP CODE				Lab Contacts:		Simone Singh (408) 498-7901		Mandy Palm (858) 444-7138	

Sample No.	Test Code	Sample Location	Total Volume/Area
1	PLM 1	3002 Orange Peel drywall Sys. (Paint, tx, tape, J.C. Drywall)	
2	2		
3	3		
4	4	Blue Cove Base & mastic	
5	5		
6	6		
7	7	Gray Cove Base & mastic	
8	8		
9	9		
10	10	Gray 4"x4" Ceramic wall tile, Grout, Mastic	
11	11		
12	12		
13	13	Cream 4"x4" Ceramic wall tile	
14	14		
15	15		

1054	Direct, Non-viable Spore Trap	1015	Culture - WATER Legionella
1049	Direct, Quantitative- Swab/Tape	1017	Culture - SWAB Legionella
1050	Direct, Qualitative- Bulk	1010	WATER - Potable - E. coli/total coliforms
1005	AIR Culture - Bacterial Count w/ ID's	1012	SWAB - E. coli/total coliforms
1030	AIR Culture - Fungal Count w/ ID's	1028	SWAB - Sewage Screen (E. coli/Enterococcus/fecal coliforms)
1006	SWAB Culture - Bacterial Count w/ ID's	2056	WATER - Heterotrophic Plate Count
1031	SWAB Culture - Fungal Count w/ ID's	3001	ASBESTOS - Point count
1008	BULK Culture - Bacterial Count w/ ID's	3002	ASBESTOS - PLM Analysis
1033	BULK Culture - Fungal Count w/ ID's	3003	ASBESTOS - Particle characterization
1007	WATER Culture - Bacterial Count w/ID's	3004	ASBESTOS - PCM Analysis

20050510
11/30/2020

Page 2 of 2

Aerobiology Client		c395 Dominion Environmental Consultants, Inc.			AZ, CA, CO, FL, GA, VA, NJ		AZ, CA, CO, VA		AZ, CA, CO, FL GA, NJ, VA	
Field Contact		Reporting Address 20045 N. 19th Ave Building 7 Phoenix AZ 85027			Collected By/Date:		Relinquished By/Date:			
Billing Address 20045 N. 19th Ave Building 7 Phoenix AZ 85027					Relinquished By/Date:		Received By/Date: <i>Relinquished 1/30/2010</i>			
Phone/Fax 623-516-1414		Reporting Email (s)			Sampler Type Andersen _____ SAS _____		SampleAire _____ Aero Trap _____		Other _____ BioCulture _____	
Routine ☐ 24 Hour ☒ Same Day ☐ 4 Hour ☐ 2 Hour ☐					PO#/Job#:		Project Name:			
Notes:					Lab Contacts:		Simone Singh (408) 498-7901		Mandy Palm (858) 444-7138	
SAMPLING LOCATION ZIP CODE										

[illegible]

1054	Direct, Non-viable Spore Trap	1015	Culture - WATER Legionella
1049	Direct, Quantitative- Swab/Tape	1017	Culture - SWAB Legionella
1050	Direct, Qualitative- Bulk	1010	WATER - Potable - E. coli/total coliforms
1005	AIR Culture - Bacterial Count w/ ID's	1012	SWAB - E. coli/total coliforms
1030	AIR Culture - Fungal Count w/ ID's	1028	SWAB - Sewage Screen (E. coli/Entero/fecal coliforms)
1006	SWAB Culture - Bacterial Count w/ ID's	2056	WATER - Heterotrophic Plate Count
1031	SWAB Culture - Fungal Count w/ ID's	3001	ASBESTOS - Point count
1008	BULK Culture - Bacterial Count w/ ID's	3002	ASBESTOS - PLM Analysis
1033	BULK Culture - Fungal Count w/ ID's	3003	ASBESTOS - Particle characterization
1007	WATER Culture - Bacterial Count w/ID's	3004	ASBESTOS - PCM Analysis

Client: Dominion Environmental Consultants, Inc
20045 N. 19th Ave Building 7
Phoenix, AZ 85027
Attn: Ryan Kuhn

Certificate of Analysis

Project Name: 262266/AZ0959.2613 Kyrene Aprende Middle School (NM)

Project ID: 20050510

Date Collected: 11/30/2020
Date Received: 11/30/2020
Date Analyzed: 11/30/2020
Date Reported: 12/01/2020

Test Requested: **Asbestos Bulk Analysis, Polarized Light Microscopy (PLM):** EPA 600/R-93/116
Method for Asbestos in Bulk Building Materials, EPA-40 CFR Appendix E to Subpart E of Part 63, Interim Method for Asbestos in Bulk Insulation Samples

Total Samples Submitted: 24
Total Samples Analyzed: 24
Total Samples with Asbestos (≥1%): 0

Location: PLM-1 Orange Peel Drywall Sys. (Paint, Tex, Tape, JC, Drywall) Lab ID: 20050510-001

Physical Description of Sample/Layer	Asbestos Detected
Multicolored Paint Layers	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White/Tan Drywall	ND

Location: PLM-2 Orange Peel Drywall Sys. (Paint, Tex, Tape, JC, Drywall) Lab ID: 20050510-002

Physical Description of Sample/Layer	Asbestos Detected
Multicolored Paint Layers	ND
White Texture	ND
White Mesh	ND
White Compound	ND
White/Tan Drywall	ND

Location: PLM-3 Orange Peel Drywall Sys. (Paint, Tex, Tape, JC, Drywall) Lab ID: 20050510-003

Physical Description of Sample/Layer	Asbestos Detected
Beige Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
Gray/Tan Drywall	ND

Location: PLM-4 Blue Cove Base & Mastic Lab ID: 20050510-004

Physical Description of Sample/Layer	Asbestos Detected
White Mastic	ND
Blue Cove Base	ND

Location: PLM-5 Blue Cove Base & Mastic Lab ID: 20050510-005

Physical Description of Sample/Layer	Asbestos Detected
Cream Mastic	ND
Blue Cove Base	ND



Aaron Agajanian
Analyst



Elle Teague
Manager-Asbestos

A Amosite
AC Actinolite
AN Anthophyllite
CHRY Chrysotile
CR Crocidolite
TR Tremolite
Trace Less Than 1%
ND None Detected

Client: Dominion Environmental Consultants, Inc
20045 N. 19th Ave Building 7
Phoenix, AZ 85027
Attn: Ryan Kuhn

Certificate of Analysis

Project Name: 262266/AZ0959.2613 Kyrene Aprende Middle School (NM)

Project ID: 20050510

Date Collected: 11/30/2020
Date Received: 11/30/2020
Date Analyzed: 11/30/2020
Date Reported: 12/01/2020

Test Requested: **Asbestos Bulk Analysis, Polarized Light Microscopy (PLM):** EPA 600/R-93/116
Method for Asbestos in Bulk Building Materials, EPA-40 CFR Appendix E to Subpart E of Part 763, Interim Method for Asbestos in Bulk Insulation Samples

Location: PLM-6 Blue Cove Base & Mastic Lab ID: 20050510-006

Physical Description of Sample/Layer	Asbestos Detected
Cream Mastic	ND
Blue Cove Base	ND

Location: PLM-7 Gray Cove Base & Mastic Lab ID: 20050510-007

Physical Description of Sample/Layer	Asbestos Detected
Tan Mastic	ND
Gray Cove Base	ND

Location: PLM-8 Gray Cove Base & Mastic Lab ID: 20050510-008

Physical Description of Sample/Layer	Asbestos Detected
Tan Mastic	ND
Gray Cove Base	ND

Location: PLM-9 Gray Cove Base & Mastic Lab ID: 20050510-009

Physical Description of Sample/Layer	Asbestos Detected
Tan Mastic	ND
Gray Cove Base	ND

Location: PLM-10 Gray 4"x 4" Ceramic Wall Tile, Grout, Mastic Lab ID: 20050510-010

Physical Description of Sample/Layer	Asbestos Detected
Tan Mastic	ND
Tan Grout	ND
Gray Tile	ND

Location: PLM-11 Gray 4"x 4" Ceramic Wall Tile, Grout, Mastic Lab ID: 20050510-011

Physical Description of Sample/Layer	Asbestos Detected
Tan Mastic	ND
Tan Grout	ND
Gray Tile	ND



Aaron Agajanian
Analyst



Elle Teague
Manager-Asbestos

A Amosite
AC Actinolite
AN Anthophyllite
CHRY Chrysotile
CR Crocidolite
TR Tremolite
Trace Less Than 1%
ND None Detected

Client: Dominion Environmental Consultants, Inc
20045 N. 19th Ave Building 7
Phoenix, AZ 85027
Attn: Ryan Kuhn

Certificate of Analysis

Project Name: 262266/AZ0959.2613 Kyrene Aprende Middle School (NM)

Project ID: 20050510

Date Collected: 11/30/2020
Date Received: 11/30/2020
Date Analyzed: 11/30/2020
Date Reported: 12/01/2020

Test Requested: **Asbestos Bulk Analysis, Polarized Light Microscopy (PLM):** EPA 600/R-93/116
Method for Asbestos in Bulk Building Materials, EPA-40 CFR Appendix E to Subpart E of Part 763, Interim Method for Asbestos in Bulk Insulation Samples

Location: PLM-12 Gray 4"x 4" Ceramic Wall Tile, Grout, Mastic Lab ID: 20050510-012

Physical Description of Sample/Layer	Asbestos Detected
Tan Mastic	ND
Tan Grout	ND
Gray Tile	ND

Location: PLM-13 Cream 4"x 4" Ceramic Wall Tile Lab ID: 20050510-013

Physical Description of Sample/Layer	Asbestos Detected
Cream Tile	ND

Location: PLM-14 Cream 4"x 4" Ceramic Wall Tile Lab ID: 20050510-014

Physical Description of Sample/Layer	Asbestos Detected
Cream Tile	ND

Location: PLM-15 Cream 4"x 4" Ceramic Wall Tile Lab ID: 20050510-015

Physical Description of Sample/Layer	Asbestos Detected
Cream Tile	ND

Location: PLM-16 Blue 4"x 4" Ceramic Cove Base Tile Lab ID: 20050510-016

Physical Description of Sample/Layer	Asbestos Detected
Blue Tile	ND

Location: PLM-17 Blue 4"x 4" Ceramic Cove Base Tile Lab ID: 20050510-017

Physical Description of Sample/Layer	Asbestos Detected
Blue Tile	ND

Location: PLM-18 Blue 4"x 4" Ceramic Cove Base Tile Lab ID: 20050510-018

Physical Description of Sample/Layer	Asbestos Detected
Blue Tile	ND



Aaron Agajanian
Analyst



Elle Teague
Manager-Asbestos

A Amosite
AC Actinolite
AN Anthophyllite
CHRY Chrysotile
CR Crocidolite
TR Tremolite
Trace Less Than 1%
ND None Detected

Client: Dominion Environmental Consultants, Inc
20045 N. 19th Ave Building 7
Phoenix, AZ 85027
Attn: Ryan Kuhn

Certificate of Analysis

Project Name: 262266/AZ0959.2613 Kyrene Aprende Middle School (NM)

Project ID: 20050510

Date Collected: 11/30/2020
Date Received: 11/30/2020
Date Analyzed: 11/30/2020
Date Reported: 12/01/2020

Test Requested: **Asbestos Bulk Analysis, Polarized Light Microscopy (PLM):** EPA 600/R-93/116
Method for Asbestos in Bulk Building Materials, EPA-40 CFR Appendix E to Subpart E of Part 763, Interim Method for Asbestos in Bulk Insulation Samples

Location: PLM-19 Greenboard for Ceramic Wall Tiles

Lab ID: 20050510-019

Physical Description of Sample/Layer	Asbestos Detected
Tan/Green Paper	ND
Tan Mastic	ND
White Tile Fragment	ND

Location: PLM-20 Greenboard for Ceramic Wall Tiles

Lab ID: 20050510-020

Physical Description of Sample/Layer	Asbestos Detected
Tan/Green Paper	ND
Tan Mastic	ND
White Tile Fragment	ND

Location: PLM-21 Greenboard for Ceramic Wall Tiles

Lab ID: 20050510-021

Physical Description of Sample/Layer	Asbestos Detected
Tan/Green Paper	ND
Tan Mastic	ND
White Tile Fragment	ND

Location: PLM-22 Pink Wall Insulation

Lab ID: 20050510-022

Physical Description of Sample/Layer	Asbestos Detected
Pink Insulation	ND

Location: PLM-23 Pink Wall Insulation

Lab ID: 20050510-023

Physical Description of Sample/Layer	Asbestos Detected
Pink Insulation	ND

Location: PLM-24 Pink Wall Insulation

Lab ID: 20050510-024

Physical Description of Sample/Layer	Asbestos Detected
Pink Insulation	ND



Aaron Agajanian
Analyst



Elle Teague
Manager-Asbestos

A Amosite
AC Actinolite
AN Anthophyllite
CHRY Chrysotile
CR Crocidolite
TR Tremolite
Trace Less Than 1%
ND None Detected

Client:	Certificate of Analysis	Date Collected:	11/30/2020
Dominion Environmental Consultants, Inc	Project Name: 262266/AZ0959.2613 Kyrene Aprende Middle School (NM)	Date Received:	11/30/2020
20045 N. 19th Ave Building 7		Date Analyzed:	11/30/2020
Phoenix, AZ 85027	Project ID: 20050510	Date Reported:	12/01/2020
Attn: Ryan Kuhn			

General Notes

- * **ND** indicates no asbestos was detected.
- * The method detection limit is 1%.
- * **Trace** or "<1" indicates asbestos was identified in the sample, but the concentration is less than 1%.
- * All regulated asbestos minerals (i.e. chrysotile, amosite, crocidolite, anthophyllite, tremolite, and actinolite) were sought in every layer of each sample, but only those asbestos minerals detected are listed. Amosite is the common name for the asbestiform variety of the minerals cummingtonite and grunerite. Crocidolite is the common name used for the asbestiform variety of the mineral riebeckite.
- * Tile, vinyl, foam, plastic, and fine powder samples may contain asbestos fibers of such small diameter (< 0.25 microns in diameter) that these fibers cannot be detected by PLM. For such samples, more sensitive analytical methods (e.g. TEM, SEM, and XRD) are recommended if greater certainty about asbestos content is required. Semi-quantitative bulk TEM floor tile analysis is accepted under NESHAP regulations.
- * These results are submitted pursuant to Aerobiology Laboratory Associates, Inc.'s current terms and conditions of sale, including the company's standard warranty and limitation of liability provisions. No responsibility or liability is assumed for the manner in which the results are used or interpreted.
- * Unless notified in writing to return the samples covered by this report, Aerobiology Laboratory Associates, Inc. will store the samples for a minimum period of thirty (30) days before discarding. A shipping and handling charge will be assessed for the return of any samples.
- * Aerobiology does not guarantee the results of tape lifts, microvac, wipe, and/or debris samples. Accurate analysis cannot be performed due to particle size, media used, and/or amount of material given. Analysis of these materials should be performed by a TEM. A result of ND does not indicate that the sample area does not contain asbestos. It means the analyst could not identify asbestos in the specific sample for the reasons listed above.

Notes Required by NVLAP

- * Aerobiology Laboratory shall be responsible for all the information provided in the report, except when information is provided by the customer. Aerobiology Laboratory is not responsible for the sampling activity.
- * This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
- * This test report relates only to the items tested or calibrated.
- * This report is not valid unless it bears the name of a NVLAP-approved signatory.
- * Any reproduction of this document must include the entire document in order for the report to be valid.

Report for:

Isai Portillo
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.55; Kyrene Aprende Middle School - Main Bldg
EML ID: 4136921

Approved by:

Dates of Analysis:
Asbestos PLM: 07-08-2025



Approved Signatory
Renee Luna-Trepczynski

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC

1501 West Knudsen Drive, Phoenix, AZ 85027

(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.55; Kyrene Aprende Middle School -
Main Bldg

Date of Sampling: 07-02-2025

Date of Receipt: 07-08-2025

Date of Report: 07-08-2025

ASBESTOS PLM REPORT**Total Samples Submitted:** 27**Total Samples Analyzed:** 27**Total Samples with Layer Asbestos Content > 1%:** 0**Location: PLM-1, White 2'x2' Ceiling Tile**

Lab ID-Version‡: 20661517-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 3% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-2, White 2'x2' Ceiling Tile

Lab ID-Version‡: 20661518-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 3% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-3, White 2'x2' Ceiling Tile

Lab ID-Version‡: 20661519-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 3% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-4, Replacement 2'x2' Ceiling Tile

Lab ID-Version‡: 20661520-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 3% Glass Fibers
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.55; Kyrene Aprende Middle School -
Main Bldg

Date of Sampling: 07-02-2025
Date of Receipt: 07-08-2025
Date of Report: 07-08-2025

ASBESTOS PLM REPORT

Location: PLM-5, Replacement 2'x2' Ceiling Tile

Lab ID-Version‡: 20661521-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 3% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-6, Replacement 2'x2' Ceiling Tile

Lab ID-Version‡: 20661522-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 3% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-7, Black Window Sealant

Lab ID-Version‡: 20661523-1

Sample Layers	Asbestos Content
Black Sealant	ND
Composite Non-Asbestos Content:	5% Cellulose
Sample Composite Homogeneity:	Good

Location: PLM-8, Black Window Sealant

Lab ID-Version‡: 20661524-1

Sample Layers	Asbestos Content
Black Sealant	ND
Composite Non-Asbestos Content:	5% Cellulose
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC

1501 West Knudsen Drive, Phoenix, AZ 85027

(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.55; Kyrene Aprende Middle School -
Main Bldg

Date of Sampling: 07-02-2025

Date of Receipt: 07-08-2025

Date of Report: 07-08-2025

ASBESTOS PLM REPORT**Location: PLM-9, Black Window Sealant**

Lab ID-Version‡: 20661525-1

Sample Layers	Asbestos Content
Black Sealant	ND
Composite Non-Asbestos Content:	5% Cellulose
Sample Composite Homogeneity:	Good

Location: PLM-10, Blue 4" Cove Base & Mastic

Lab ID-Version‡: 20661526-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Blue 4" Cove Base & Mastic

Lab ID-Version‡: 20661527-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Blue 4" Cove Base & Mastic

Lab ID-Version‡: 20661528-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
 C/O: Isai Portillo
 Re: AZ1418.55; Kyrene Aprende Middle School -
 Main Bldg

Date of Sampling: 07-02-2025
 Date of Receipt: 07-08-2025
 Date of Report: 07-08-2025

ASBESTOS PLM REPORT

Location: PLM-13, Blue/Gray 2'x2' Carpet & Mastic

Lab ID-Version‡: 20661529-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-14, Blue/Gray 2'x2' Carpet & Mastic

Lab ID-Version‡: 20661530-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-15, Blue/Gray 2'x2' Carpet & Mastic

Lab ID-Version‡: 20661531-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-16, Beige w/ Tan Specks 12"x12" VCT & Mastic

Lab ID-Version‡: 20661532-1

Sample Layers	Asbestos Content
Beige Floor Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
 C/O: Isai Portillo
 Re: AZ1418.55; Kyrene Aprende Middle School -
 Main Bldg

Date of Sampling: 07-02-2025
 Date of Receipt: 07-08-2025
 Date of Report: 07-08-2025

ASBESTOS PLM REPORT

Location: PLM-17, Beige w/ Tan Specks 12"x12" VCT & Mastic

Lab ID-Version‡: 20661533-1

Sample Layers	Asbestos Content
Beige Floor Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM-18, Beige w/ Tan Specks 12"x12" VCT & Mastic

Lab ID-Version‡: 20661534-1

Sample Layers	Asbestos Content
Beige Floor Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM-19, Gray Sink Coating

Lab ID-Version‡: 20661535-1

Sample Layers	Asbestos Content
Gray Sink Undercoating	ND
Composite Non-Asbestos Content: 10% Cellulose	
Sample Composite Homogeneity: Good	

Location: PLM-20, Gray Sink Coating

Lab ID-Version‡: 20661536-1

Sample Layers	Asbestos Content
Gray Sink Undercoating	ND
Composite Non-Asbestos Content: 10% Cellulose	
Sample Composite Homogeneity: Good	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.55; Kyrene Aprende Middle School -
Main Bldg

Date of Sampling: 07-02-2025
Date of Receipt: 07-08-2025
Date of Report: 07-08-2025

ASBESTOS PLM REPORT

Location: PLM-21, Gray Sink Coating

Lab ID-Version‡: 20661537-1

Sample Layers	Asbestos Content
Gray Sink Undercoating	ND
Composite Non-Asbestos Content:	10% Cellulose
Sample Composite Homogeneity:	Good

Location: PLM-22, Tac Board Wrap & Mastic

Lab ID-Version‡: 20661538-1

Sample Layers	Asbestos Content
Brown/White Wrap	ND
Semi-Transparent Mastic	ND
Composite Non-Asbestos Content:	60% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-23, Tac Board Wrap & Mastic

Lab ID-Version‡: 20661539-1

Sample Layers	Asbestos Content
Brown/White Wrap	ND
Semi-Transparent Mastic	ND
Composite Non-Asbestos Content:	60% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-24, Tac Board Wrap & Mastic

Lab ID-Version‡: 20661540-1

Sample Layers	Asbestos Content
Brown/White Wrap	ND
Semi-Transparent Mastic	ND
Composite Non-Asbestos Content:	60% Cellulose
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.55; Kyrene Aprende Middle School -
Main Bldg

Date of Sampling: 07-02-2025
Date of Receipt: 07-08-2025
Date of Report: 07-08-2025

ASBESTOS PLM REPORT

Location: PLM-25, Gray 2"x2" Ceramic Floor Tile & Grout

Lab ID-Version‡: 20661541-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
Gray Grout	ND
Sample Composite Homogeneity: Moderate	

Location: PLM-26, Gray 2"x2" Ceramic Floor Tile & Grout

Lab ID-Version‡: 20661542-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
Gray Grout	ND
Sample Composite Homogeneity: Moderate	

Location: PLM-27, Gray 2"x2" Ceramic Floor Tile & Grout

Lab ID-Version‡: 20661543-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
Gray Grout	ND
Sample Composite Homogeneity: Moderate	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC

1501 West Knudsen Drive, Phoenix, AZ 85027

(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.

C/O: Isai Portillo

Re: AZ1418.55; Kyrene Aprende Middle School -
Main Bldg

Date of Sampling: 07-02-2025

Date of Receipt: 07-08-2025

Date of Report: 07-08-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Renee Luna-Trepczynski

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

www.eurofinsus.com/Built



East: (866) 871-1984

Central: (800) 651-4802

West: (833) 465-5857

Built Environment Testing

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

Non-Culturable		Culturable	Other Requests
Spore	Tane	BioCassette™ Andersen, SAS 10000 10th St. East, Suite 100, Denver, CO 80231 Tel: 303.755.1100 Fax: 303.755.1101 Email: info@biocassette.com	



004136921

CONTACT INFORMATION		
Company:	Dominion Environmental	Address:
Contact:	Isai Portillo	Special Instructions:
Phone:	602-882-6710	

PROJECT INFORMATION				TURN AROUND TIME CODES - (TAT)	
Project ID:	AZ1418.55			STD - Standard (Default)	Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.
Project Description:	Kyrene Aprenda Middle School - Main Bldg			ND - Next Business Day	
Project Zip Code:	Sampling Date/Time:	7/2/25		SD - Same Business Day	
PO Number:	Sampled By:	NR		WH - Weekend/Holiday/ASAP	

[illegible][illegible]

SAMPLE TYPE CODES			
BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
	7/7/25		4:55PM 7/7/25

Report for:

Tracey Carpenter
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.11; Aprende - Media Center
EML ID: 3573067

Approved by:

Dates of Analysis:
Asbestos PLM: 03-15-2024



Approved Signatory
Renee Luna-Trepczynski

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Aprende - Media Center

Date of Sampling: 03-13-2024
Date of Receipt: 03-14-2024
Date of Report: 03-18-2024

ASBESTOS PLM REPORT

Total Samples Submitted: 12

Total Samples Analyzed: 12

Total Samples with Layer Asbestos Content > 1%: 0

Location: PLM-1, Blue Cove Base & Mastic

Lab ID-Version‡: 17464243-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-2, Blue Cove Base & Mastic

Lab ID-Version‡: 17464244-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-3, Blue Cove Base & Mastic

Lab ID-Version‡: 17464245-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-4, Blue Cove Base Tile & Grout & Mastic

Lab ID-Version‡: 17464246-1

Sample Layers	Asbestos Content
Blue Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Aprende - Media Center

Date of Sampling: 03-13-2024
Date of Receipt: 03-14-2024
Date of Report: 03-18-2024

ASBESTOS PLM REPORT

Location: PLM-5, Blue Cove Base Tile & Grout & Mastic

Lab ID-Version‡: 17464247-1

Sample Layers	Asbestos Content
Blue Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity: Poor	

Location: PLM-6, Blue Cove Base Tile & Grout & Mastic

Lab ID-Version‡: 17464248-1

Sample Layers	Asbestos Content
Blue Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity: Poor	

Location: PLM-7, Gray 2"x2" RR Floor Tile & Grout & Mastic

Lab ID-Version‡: 17464249-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity: Poor	

Location: PLM-8, Gray 2"x2" RR Floor Tile & Grout & Mastic

Lab ID-Version‡: 17464250-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
Tan Mastic	ND
Sample Composite Homogeneity: Poor	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Aprende - Media Center

Date of Sampling: 03-13-2024
Date of Receipt: 03-14-2024
Date of Report: 03-18-2024

ASBESTOS PLM REPORT

Location: PLM-9, Gray 2"x2" RR Floor Tile & Grout & Mastic

Lab ID-Version‡: 17464251-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity: Poor	

Location: PLM-10, Orange Peel Drywall System/paint, tape, texture, joint compound & drywall

Lab ID-Version‡: 17464252-1

Sample Layers	Asbestos Content
Beige Paint	ND
White Compound	ND
White Drywall	ND
Sample Composite Homogeneity: Poor	

Location: PLM-11, Orange Peel Drywall System/paint, tape, texture, joint compound & drywall

Lab ID-Version‡: 17464253-1

Sample Layers	Asbestos Content
Tan Mastic	ND
Beige Paint	ND
White Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	10% Cellulose
Sample Composite Homogeneity: Poor	

Location: PLM-12, Orange Peel Drywall System/paint, tape, texture, joint compound & drywall

Lab ID-Version‡: 17464254-1

Sample Layers	Asbestos Content
Tan Mastic	ND
Beige Paint	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	10% Cellulose
Sample Composite Homogeneity: Poor	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

REC		
Non-Culturable		
Spore Trap	Tape, Swab, Bulk	BioCas Swab,



003573067

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address: 20045 N. 19th Ave, Bldg 7, Phoenix, AZ 85027
Contact:	Tracey Carpenter	Special Instructions:
Phone:	(602) 989-9992	email results: tcarpenter@dominion-env.com

PROJECT INFORMATION

TURN AROUND TIME CODES - (TAT)

Project ID:	A21418.11		STD - Standard (Default)	Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.
Project Description:	Aprende - Media Centur		ND - Next Business Day	
Project Zip Code:	85226	Sampling Date/Time: 3/13/24 @ 1pm	SD - Same Business Day	
PO Number:	316034	Sampled By: JLC	WH - Weekend/Holiday/ASAP	

[illegible]

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY

Gracey Camp

DATE & TIME

3/14/24 @
830 AM

RECEIVED BY

DATE & TIME

3-14-20
8:40 a.

Report for:

Isai Portillo
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.55; Kyrene Aprende Middle School - Media Center
EML ID: 4136919

Approved by:

Dates of Analysis:
Asbestos PLM: 07-08-2025



Approved Signatory
Renee Luna-Trepczynski

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC

1501 West Knudsen Drive, Phoenix, AZ 85027

(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.55; Kyrene Aprende Middle School -
Media Center

Date of Sampling: 07-02-2025

Date of Receipt: 07-08-2025

Date of Report: 07-08-2025

ASBESTOS PLM REPORT**Total Samples Submitted:** 24**Total Samples Analyzed:** 24**Total Samples with Layer Asbestos Content > 1%:** 0**Location: PLM-1, White 2'x2' Ceiling Tile (Old)**

Lab ID-Version‡: 20661673-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-2, White 2'x2' Ceiling Tile (Old)

Lab ID-Version‡: 20661674-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-3, White 2'x2' Ceiling Tile (Old)

Lab ID-Version‡: 20661675-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-4, White 2'x2' Ceiling Tile (New)

Lab ID-Version‡: 20661676-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.55; Kyrene Aprende Middle School -
Media Center

Date of Sampling: 07-02-2025
Date of Receipt: 07-08-2025
Date of Report: 07-08-2025

ASBESTOS PLM REPORT

Location: PLM-5, White 2'x2' Ceiling Tile (New)

Lab ID-Version‡: 20661677-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-6, White 2'x2' Ceiling Tile (New)

Lab ID-Version‡: 20661678-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-7, White Smooth 2'x2' Ceiling Tile

Lab ID-Version‡: 20661679-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-8, White Smooth 2'x2' Ceiling Tile

Lab ID-Version‡: 20661680-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC

1501 West Knudsen Drive, Phoenix, AZ 85027

(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.55; Kyrene Aprende Middle School -
Media Center

Date of Sampling: 07-02-2025

Date of Receipt: 07-08-2025

Date of Report: 07-08-2025

ASBESTOS PLM REPORT**Location: PLM-9, White Smooth 2'x2' Ceiling Tile**

Lab ID-Version‡: 20661681-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-10, White Texture 2'x2' Ceiling Tile

Lab ID-Version‡: 20661682-1

Sample Layers	Asbestos Content
Yellow Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-11, White Texture 2'x2' Ceiling Tile

Lab ID-Version‡: 20661683-1

Sample Layers	Asbestos Content
Yellow Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-12, White Texture 2'x2' Ceiling Tile

Lab ID-Version‡: 20661684-1

Sample Layers	Asbestos Content
Yellow Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC

1501 West Knudsen Drive, Phoenix, AZ 85027

(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.55; Kyrene Aprende Middle School -
Media Center

Date of Sampling: 07-02-2025

Date of Receipt: 07-08-2025

Date of Report: 07-08-2025

ASBESTOS PLM REPORT**Location: PLM-13, Beige w/ Tan Specks 12"x12" VCT & Mastic**

Lab ID-Version‡: 20661685-1

Sample Layers	Asbestos Content
Beige Floor Tile	ND
Light Brown Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM-14, Beige w/ Tan Specks 12"x12" VCT & Mastic

Lab ID-Version‡: 20661686-1

Sample Layers	Asbestos Content
Beige Floor Tile	ND
Light Brown Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM-15, Beige w/ Tan Specks 12"x12" VCT & Mastic

Lab ID-Version‡: 20661687-1

Sample Layers	Asbestos Content
Beige Floor Tile	ND
Light Brown Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM-16, Blue 4" Cove Base & Mastic

Lab ID-Version‡: 20661688-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Light Brown Mastic	ND
Sample Composite Homogeneity: Poor	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
 C/O: Isai Portillo
 Re: AZ1418.55; Kyrene Aprende Middle School -
 Media Center

Date of Sampling: 07-02-2025
 Date of Receipt: 07-08-2025
 Date of Report: 07-08-2025

ASBESTOS PLM REPORT

Location: PLM-17, Blue 4" Cove Base & Mastic

Lab ID-Version‡: 20661689-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Light Brown Mastic	ND
Sample Composite Homogeneity: Poor	

Location: PLM-18, Blue 4" Cove Base & Mastic

Lab ID-Version‡: 20661690-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Light Brown Mastic	ND
Sample Composite Homogeneity: Poor	

Location: PLM-19, Blue/Gray 2'x2' Carpet & Mastic

Lab ID-Version‡: 20661691-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Tan Mastic with Green Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity: Poor	

Location: PLM-20, Blue/Gray 2'x2' Carpet & Mastic

Lab ID-Version‡: 20661692-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Tan Mastic with Green Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity: Poor	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
 C/O: Isai Portillo
 Re: AZ1418.55; Kyrene Aprende Middle School -
 Media Center

Date of Sampling: 07-02-2025
 Date of Receipt: 07-08-2025
 Date of Report: 07-08-2025

ASBESTOS PLM REPORT

Location: PLM-21, Blue/Gray 2'x2' Carpet & Mastic

Lab ID-Version‡: 20661693-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Tan Mastic with Green Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-22, Black Window Sealant

Lab ID-Version‡: 20661694-1

Sample Layers	Asbestos Content
Black Sealant	ND
Sample Composite Homogeneity:	Good

Location: PLM-23, Black Window Sealant

Lab ID-Version‡: 20661695-1

Sample Layers	Asbestos Content
Black Sealant	ND
Sample Composite Homogeneity:	Good

Location: PLM-24, Black Window Sealant

Lab ID-Version‡: 20661696-1

Sample Layers	Asbestos Content
Black Sealant	ND
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC

1501 West Knudsen Drive, Phoenix, AZ 85027

(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.55; Kyrene Aprende Middle School -
Media Center

Date of Sampling: 07-02-2025

Date of Receipt: 07-08-2025

Date of Report: 07-08-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Aaron Agajanian

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

www.eurofinsus.com/Built



East: (866) 871-1984

Central: (800) 651-4802

West: (833) 465-5857

Built Environment Testing

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

Non-Culturable	Culturable	Other Requests
Spor Tra	RinCassette™ Andersen, SAS.	



004136919

CONTACT INFORMATION

Company:	Dominion Environmental	Address:
Contact:	Isai Portillo	Special Instructions:
Phone:	602-882-6710	

PROJECT INFORMATION

TURN AROUND TIME CODES - (TAT)

Project ID:	AZ1418.55		STD - Standard (Default)	Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.
Project Description:	Kyrene Aprende Middle School - Media Center		ND - Next Business Day	
Project Zip Code:	Sampling Date/Time:	7/2/25	SD - Same Business Day	
PO Number:	Sampled By:	ad R	WH - Weekend/Holiday/ASAP	

[illegible]

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY

NR

DATE & TIME

7/7/25

RECEIVED BY

Lydia Carter

DATE & TIME

4:55 PM
717125

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at <http://www.emlab.com/s/main/serviceterms.html>

Report for:

Xin Lou
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.14; Kyrene Aprende MS - Kitchen Remodel
EML ID: 3565835

Approved by:

Dates of Analysis:
Asbestos PLM: 03-12-2024



Approved Signatory
Renee Luna-Trepczynski

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, Inc.

1501 West Knudsen Drive, Phoenix, AZ 85027

(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.

C/O: Xin Lou

Re: AZ1418.14; Kyrene Aprende MS - Kitchen

Remodel

Date of Sampling: 03-06-2024

Date of Receipt: 03-07-2024

Date of Report: 03-12-2024

ASBESTOS PLM REPORT**Total Samples Submitted:** 75**Total Samples Analyzed:** 75**Total Samples with Layer Asbestos Content > 1%:** 0**Location: PLM 1, 12"x12" Gray Ceramic Floor Tile, Mastic**

Lab ID-Version‡: 17425013-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
Yellow Mastic (Trace)	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 2, 12"x12" Gray Ceramic Floor Tile, Mastic

Lab ID-Version‡: 17425014-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 3, 12"x12" Gray Ceramic Floor Tile, Mastic

Lab ID-Version‡: 17425015-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 4, Grout

Lab ID-Version‡: 17425016-1

Sample Layers	Asbestos Content
Gray Grout	ND
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.

1501 West Knudsen Drive, Phoenix, AZ 85027

(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.

C/O: Xin Lou

Re: AZ1418.14; Kyrene Aprende MS - Kitchen

Remodel

Date of Sampling: 03-06-2024

Date of Receipt: 03-07-2024

Date of Report: 03-12-2024

ASBESTOS PLM REPORT**Location: PLM 5, Grout**

Lab ID-Version‡: 17425017-1

Sample Layers	Asbestos Content
Gray Grout	ND
Sample Composite Homogeneity: Good	

Location: PLM 6, Grout

Lab ID-Version‡: 17425018-1

Sample Layers	Asbestos Content
Gray Grout	ND
Sample Composite Homogeneity: Good	

Location: PLM 7, Gray Ceramic Base Tile

Lab ID-Version‡: 17425019-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM 8, Gray Ceramic Base Tile

Lab ID-Version‡: 17425020-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Xin Lou
Re: AZ1418.14; Kyrene Aprende MS - Kitchen
Remodel

Date of Sampling: 03-06-2024
Date of Receipt: 03-07-2024
Date of Report: 03-12-2024

ASBESTOS PLM REPORT

Location: PLM 9, Gray Ceramic Base Tile

Lab ID-Version‡: 17425021-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 10, Grout

Lab ID-Version‡: 17425022-1

Sample Layers	Asbestos Content
Gray Grout	ND
Sample Composite Homogeneity:	Good

Location: PLM 11, Grout

Lab ID-Version‡: 17425023-1

Sample Layers	Asbestos Content
Gray Grout	ND
Sample Composite Homogeneity:	Good

Location: PLM 12, Grout

Lab ID-Version‡: 17425024-1

Sample Layers	Asbestos Content
Gray Grout	ND
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Xin Lou
Re: AZ1418.14; Kyrene Aprende MS - Kitchen
Remodel

Date of Sampling: 03-06-2024
Date of Receipt: 03-07-2024
Date of Report: 03-12-2024

ASBESTOS PLM REPORT

Location: PLM 13, Gray Cove Base, Mastic

Lab ID-Version‡: 17425025-1

Sample Layers	Asbestos Content
Gray Cove Base	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM 14, Gray Cove Base, Mastic

Lab ID-Version‡: 17425026-1

Sample Layers	Asbestos Content
Gray Cove Base	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM 15, Gray Cove Base, Mastic

Lab ID-Version‡: 17425027-1

Sample Layers	Asbestos Content
Gray Cove Base	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM 16, Black Cove Base, Mastic

Lab ID-Version‡: 17425028-1

Sample Layers	Asbestos Content
Black Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity: Moderate	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Xin Lou
Re: AZ1418.14; Kyrene Aprende MS - Kitchen
Remodel

Date of Sampling: 03-06-2024
Date of Receipt: 03-07-2024
Date of Report: 03-12-2024

ASBESTOS PLM REPORT

Location: PLM 17, Black Cove Base, Mastic

Lab ID-Version‡: 17425029-1

Sample Layers	Asbestos Content
Black Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 18, Black Cove Base, Mastic

Lab ID-Version‡: 17425030-1

Sample Layers	Asbestos Content
Black Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 19, FRP, Mastic

Lab ID-Version‡: 17425031-1

Sample Layers	Asbestos Content
White Fiberglass Reinforced Plastic	ND
Tan Mastic	ND
Cream Mastic	ND
Composite Non-Asbestos Content:	15% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM 20, FRP, Mastic

Lab ID-Version‡: 17425032-1

Sample Layers	Asbestos Content
White Fiberglass Reinforced Plastic	ND
Tan Mastic	ND
Cream Mastic	ND
Composite Non-Asbestos Content:	15% Glass Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Xin Lou
Re: AZ1418.14; Kyrene Aprende MS - Kitchen
Remodel

Date of Sampling: 03-06-2024
Date of Receipt: 03-07-2024
Date of Report: 03-12-2024

ASBESTOS PLM REPORT

Location: PLM 21, FRP, Mastic

Lab ID-Version‡: 17425033-1

Sample Layers	Asbestos Content
White Fiberglass Reinforced Plastic	ND
Tan Mastic	ND
Cream Mastic	ND
Composite Non-Asbestos Content:	15% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM 22, Counter Caulking

Lab ID-Version‡: 17425034-1

Sample Layers	Asbestos Content
White Caulk	ND
Sample Composite Homogeneity:	Good

Location: PLM 23, Counter Caulking

Lab ID-Version‡: 17425035-1

Sample Layers	Asbestos Content
White Caulk	ND
Sample Composite Homogeneity:	Good

Location: PLM 24, Counter Caulking

Lab ID-Version‡: 17425036-1

Sample Layers	Asbestos Content
White Caulk	ND
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Xin Lou
Re: AZ1418.14; Kyrene Aprende MS - Kitchen
Remodel

Date of Sampling: 03-06-2024
Date of Receipt: 03-07-2024
Date of Report: 03-12-2024

ASBESTOS PLM REPORT

Location: PLM 25, Orange Peel Drywall

Lab ID-Version‡: 17425037-1

Sample Layers	Asbestos Content
Cream Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM 26, Orange Peel Drywall

Lab ID-Version‡: 17425038-1

Sample Layers	Asbestos Content
Peach Paint #1	ND
White Texture	ND
Peach Paint #2	ND
White Compound #1	ND
Peach Paint #3	ND
White Compound #2	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Xin Lou
Re: AZ1418.14; Kyrene Aprende MS - Kitchen
Remodel

Date of Sampling: 03-06-2024
Date of Receipt: 03-07-2024
Date of Report: 03-12-2024

ASBESTOS PLM REPORT

Location: PLM 27, Orange Peel Drywall

Lab ID-Version‡: 17425039-1

Sample Layers	Asbestos Content
Peach Paint #1	ND
White Texture	ND
Peach Paint #2	ND
White Compound #1	ND
Peach Paint #3	ND
White Compound #2	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM 28, 12"x12" Beige VCT, Mastic

Lab ID-Version‡: 17425040-1

Sample Layers	Asbestos Content
Beige Floor Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Xin Lou
Re: AZ1418.14; Kyrene Aprende MS - Kitchen
Remodel

Date of Sampling: 03-06-2024
Date of Receipt: 03-07-2024
Date of Report: 03-12-2024

ASBESTOS PLM REPORT

Location: PLM 29, 12"x12" Beije VCT, Mastic

Lab ID-Version‡: 17425041-1

Sample Layers	Asbestos Content
Beige Floor Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM 30, 12"x12" Beije VCT, Mastic

Lab ID-Version‡: 17425042-1

Sample Layers	Asbestos Content
Beige Floor Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM 31, Blue Cove Base, Mastic

Lab ID-Version‡: 17425043-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM 32, Blue Cove Base, Mastic

Lab ID-Version‡: 17425044-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Xin Lou
Re: AZ1418.14; Kyrene Aprende MS - Kitchen
Remodel

Date of Sampling: 03-06-2024
Date of Receipt: 03-07-2024
Date of Report: 03-12-2024

ASBESTOS PLM REPORT

Location: PLM 33, Blue Cove Base, Mastic

Lab ID-Version‡: 17425045-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM 34, Window Frame Caulking

Lab ID-Version‡: 17425046-1

Sample Layers	Asbestos Content
White Paint	ND
White Caulk	ND
Sample Composite Homogeneity: Good	

Location: PLM 35, Window Frame Caulking

Lab ID-Version‡: 17425047-1

Sample Layers	Asbestos Content
White Paint	ND
White Caulk	ND
Sample Composite Homogeneity: Good	

Location: PLM 36, Window Frame Caulking

Lab ID-Version‡: 17425048-1

Sample Layers	Asbestos Content
White Paint	ND
White Caulk	ND
Sample Composite Homogeneity: Good	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.

1501 West Knudsen Drive, Phoenix, AZ 85027

(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.

C/O: Xin Lou

Re: AZ1418.14; Kyrene Aprende MS - Kitchen

Remodel

Date of Sampling: 03-06-2024

Date of Receipt: 03-07-2024

Date of Report: 03-12-2024

ASBESTOS PLM REPORT**Location: PLM 37, Window Glazing**

Lab ID-Version‡: 17425049-1

Sample Layers	Asbestos Content
Black Window Glazing	ND
Sample Composite Homogeneity:	Good

Location: PLM 38, Window Glazing

Lab ID-Version‡: 17425050-1

Sample Layers	Asbestos Content
Black Window Glazing	ND
Sample Composite Homogeneity:	Good

Location: PLM 39, Window Glazing

Lab ID-Version‡: 17425051-1

Sample Layers	Asbestos Content
Black Window Glazing	ND
Sample Composite Homogeneity:	Good

Location: PLM 40, Door Frame Caulking

Lab ID-Version‡: 17425052-1

Sample Layers	Asbestos Content
White Paint	ND
White Caulk	ND
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Xin Lou
Re: AZ1418.14; Kyrene Aprende MS - Kitchen
Remodel

Date of Sampling: 03-06-2024
Date of Receipt: 03-07-2024
Date of Report: 03-12-2024

ASBESTOS PLM REPORT

Location: PLM 41, Door Frame Caulking

Lab ID-Version‡: 17425053-1

Sample Layers	Asbestos Content
White Paint	ND
White Caulk	ND
Sample Composite Homogeneity: Good	

Location: PLM 42, Door Frame Caulking

Lab ID-Version‡: 17425054-1

Sample Layers	Asbestos Content
White Paint	ND
White Caulk	ND
Sample Composite Homogeneity: Good	

Location: PLM 43, Fixture Caulking

Lab ID-Version‡: 17425055-1

Sample Layers	Asbestos Content
White Caulk	ND
Sample Composite Homogeneity: Good	

Location: PLM 44, Fixture Caulking

Lab ID-Version‡: 17425056-1

Sample Layers	Asbestos Content
White Caulk	ND
Sample Composite Homogeneity: Good	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Xin Lou
Re: AZ1418.14; Kyrene Aprende MS - Kitchen
Remodel

Date of Sampling: 03-06-2024
Date of Receipt: 03-07-2024
Date of Report: 03-12-2024

ASBESTOS PLM REPORT

Location: PLM 45, Fixture Caulking

Lab ID-Version‡: 17425057-1

Sample Layers	Asbestos Content
White Caulk	ND
Sample Composite Homogeneity: Good	

Location: PLM 46, White 4"x4" Ceramic Wall Tile. Mastic

Lab ID-Version‡: 17425058-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM 47, White 4"x4" Ceramic Wall Tile. Mastic

Lab ID-Version‡: 17425059-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM 48, White 4"x4" Ceramic Wall Tile. Mastic

Lab ID-Version‡: 17425060-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Xin Lou
Re: AZ1418.14; Kyrene Aprende MS - Kitchen
Remodel

Date of Sampling: 03-06-2024
Date of Receipt: 03-07-2024
Date of Report: 03-12-2024

ASBESTOS PLM REPORT

Location: PLM 49, Gray 4"x4" Ceramic Wall Tile. Mastic

Lab ID-Version‡: 17425061-1

Sample Layers	Asbestos Content
Light Gray Ceramic Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM 50, Gray 4"x4" Ceramic Wall Tile. Mastic

Lab ID-Version‡: 17425062-1

Sample Layers	Asbestos Content
Light Gray Ceramic Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM 51, Gray 4"x4" Ceramic Wall Tile. Mastic

Lab ID-Version‡: 17425063-1

Sample Layers	Asbestos Content
Light Gray Ceramic Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM 52, Tan 4"x4" Ceramic Wall Tile. Mastic

Lab ID-Version‡: 17425064-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
White Mastic	ND
Gray Mortar	ND
Sample Composite Homogeneity: Poor	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Xin Lou
Re: AZ1418.14; Kyrene Aprende MS - Kitchen
Remodel

Date of Sampling: 03-06-2024
Date of Receipt: 03-07-2024
Date of Report: 03-12-2024

ASBESTOS PLM REPORT

Location: PLM 53, Tan 4"x4" Ceramic Wall Tile. Mastic

Lab ID-Version‡: 17425065-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
White Mastic	ND
Gray Mortar	ND
Sample Composite Homogeneity: Poor	

Location: PLM 54, Tan 4"x4" Ceramic Wall Tile. Mastic

Lab ID-Version‡: 17425066-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
White Mastic	ND
Gray Mortar	ND
Sample Composite Homogeneity: Poor	

Location: PLM 55, Blue 4"x4" Ceramic Wall Tile. Mastic

Lab ID-Version‡: 17425067-1

Sample Layers	Asbestos Content
Blue Ceramic Tile	ND
Sample Composite Homogeneity: Good	

Location: PLM 56, Blue 4"x4" Ceramic Wall Tile. Mastic

Lab ID-Version‡: 17425068-1

Sample Layers	Asbestos Content
Blue Ceramic Tile	ND
White Mastic	ND
Sample Composite Homogeneity: Moderate	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Xin Lou
Re: AZ1418.14; Kyrene Aprende MS - Kitchen
Remodel

Date of Sampling: 03-06-2024
Date of Receipt: 03-07-2024
Date of Report: 03-12-2024

ASBESTOS PLM REPORT

Location: PLM 57, Blue 4"x4" Ceramic Wall Tile. Mastic

Lab ID-Version‡: 17425069-1

Sample Layers	Asbestos Content
Blue Ceramic Tile	ND
White Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 58, Grout

Lab ID-Version‡: 17425070-1

Sample Layers	Asbestos Content
Tan Grout	ND
Sample Composite Homogeneity:	Good

Location: PLM 59, Grout

Lab ID-Version‡: 17425071-1

Sample Layers	Asbestos Content
Tan Grout	ND
Sample Composite Homogeneity:	Good

Location: PLM 60, Grout

Lab ID-Version‡: 17425072-1

Sample Layers	Asbestos Content
Tan Grout	ND
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Xin Lou
Re: AZ1418.14; Kyrene Aprende MS - Kitchen
Remodel

Date of Sampling: 03-06-2024
Date of Receipt: 03-07-2024
Date of Report: 03-12-2024

ASBESTOS PLM REPORT

Location: PLM 61, 2"x2" Gray Ceramic Floor Tile

Lab ID-Version‡: 17425073-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 62, 2"x2" Gray Ceramic Floor Tile

Lab ID-Version‡: 17425074-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 63, 2"x2" Gray Ceramic Floor Tile

Lab ID-Version‡: 17425075-1

Sample Layers	Asbestos Content
Gray Ceramic Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 64, Grout

Lab ID-Version‡: 17425076-1

Sample Layers	Asbestos Content
Gray Grout	ND
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.

1501 West Knudsen Drive, Phoenix, AZ 85027

(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.

C/O: Xin Lou

Re: AZ1418.14; Kyrene Aprende MS - Kitchen

Remodel

Date of Sampling: 03-06-2024

Date of Receipt: 03-07-2024

Date of Report: 03-12-2024

ASBESTOS PLM REPORT**Location: PLM 65, Grout**

Lab ID-Version‡: 17425077-1

Sample Layers	Asbestos Content
Gray Grout	ND
Sample Composite Homogeneity:	Good

Location: PLM 66, Grout

Lab ID-Version‡: 17425078-1

Sample Layers	Asbestos Content
Gray Grout	ND
Sample Composite Homogeneity:	Good

Location: PLM 67, 2"x2" Ceiling Tile

Lab ID-Version‡: 17425079-1

Sample Layers	Asbestos Content
Light Brown Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM 68, 2"x2" Ceiling Tile

Lab ID-Version‡: 17425080-1

Sample Layers	Asbestos Content
Light Brown Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Xin Lou
Re: AZ1418.14; Kyrene Aprende MS - Kitchen
Remodel

Date of Sampling: 03-06-2024
Date of Receipt: 03-07-2024
Date of Report: 03-12-2024

ASBESTOS PLM REPORT

Location: PLM 69, 2"x2" Ceiling Tile

Lab ID-Version‡: 17425081-1

Sample Layers	Asbestos Content
Light Brown Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM 70, 2"x2" Ceiling Tile

Lab ID-Version‡: 17425082-1

Sample Layers	Asbestos Content
Light Brown Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM 71, 2"x2" Ceiling Tile

Lab ID-Version‡: 17425083-1

Sample Layers	Asbestos Content
Light Brown Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM 72, 2"x2" Ceiling Tile

Lab ID-Version‡: 17425084-1

Sample Layers	Asbestos Content
Light Brown Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Xin Lou
Re: AZ1418.14; Kyrene Aprende MS - Kitchen
Remodel

Date of Sampling: 03-06-2024
Date of Receipt: 03-07-2024
Date of Report: 03-12-2024

ASBESTOS PLM REPORT

Location: PLM 73, Duct Insulation, Backing

Lab ID-Version‡: 17425085-1

Sample Layers	Asbestos Content
Yellow Insulation	ND
Silver Wrap	ND
Composite Non-Asbestos Content:	50% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 74, Duct Insulation, Backing

Lab ID-Version‡: 17425086-1

Sample Layers	Asbestos Content
Yellow Insulation	ND
Silver Wrap	ND
Composite Non-Asbestos Content:	50% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 75, Duct Insulation, Backing

Lab ID-Version‡: 17425087-1

Sample Layers	Asbestos Content
Yellow Insulation	ND
Silver Wrap	ND
Composite Non-Asbestos Content:	50% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

East: (866) 871-1984

Central: (800) 651-4802

West: (866) 888-6653

LEVEL	WEATHER					
	None					
	Light					
	Moderate					
	Heavy					



003565835

sts

CONTACT INFORMATION

Company:	Dominion Environmental	Address:	
Contact:	Xin Lou	Special Instructions:	
Phone:	602-810-8581		

PROJECT INFORMATION

TURN AROUND TIME CODES - (TAT)

Project ID:	AZ148.14	STD - Standard (Default)	Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.
Project Description:	Kylene Aprende MS - Kitchen Remodel	NP - Next Business Day	
Project Zip Code:	814311	SD - Same Business Day	
PO Number:	314311	WH - Weekend/Holiday/ASAP	

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	12"x12" Gray Ceramic Floor Tile, MASH	STD			
4-6	Grout				
7-9	Gray Ceramic Base Tile				
10-12	Grout				
13-15	Gray Core Base, MASH				
16-18	Black Core Base, MASH				
19-21	FRP, MASH				
22-24	Counter Caulking				
25-27	Orange Peel Drywall				
28-30	12"x12" Beige VCT, MASH				
31-33	Blue Core Base, MASH				
34-36	Window Frame Caulking				
37-39	Window Glazing				
40-42	Door Frame Caulking				
43-45	Fixture Caulking				

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY

DATE & TIME

RECEIVED BY

DATE & TIME

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at: <https://www.eurofinsus.com/environment-testing/built-environment/resources/sampling-guides-and-forms>

©COPYRIGHT 2022 EUROFINS EPK BUILT ENVIRONMENT TESTING, LLC

East: (866) 871-1984
Central: (800) 651-4802
West: (866) 888-6653

LEVEL	WEATHER	Fog	Rain	Snow	Wind	Clear
	None					
	Light					
	Moderate					
	Heavy					



003565835

ests

CONTACT INFORMATION

Company:	Dominion Environmental	Address:
Contact:	Xin Lou	Special Instructions:
Phone:	602-810-8581	

PROJECT INFORMATION

TURN AROUND TIME CODES - (TAT)

Project ID:		STD - Standard (Default)	Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.
Project Description:		ND - Next Business Day	
Project Zip Code:		SD - Same Business Day	
PO Number:		WH - Weekend/Holiday/ASAP	

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 46-48	White 4" x 4" Ceramic wall Tile. Mark B510				
49-51	Gray				
52-54	Tan				
55-57	Blue				
58-60	Green				
61-63	2" x 2" Gray Ceramic Floor Tile				
64-66	Green				
67-69	2' x 2' ceiling Tile				
70-72					
73-75	Duct Insulation, Backing				

SAMPLE TYPE CODES


BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY

DATE & TIME

RECEIVED BY

DATE & TIME

	03/07/24
---	----------

Report for:

Isai Portillo
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.55; Kyrene Aprende Middle School - Multi Purpose
EML ID: 4136917

Approved by:

Dates of Analysis:
Asbestos PLM: 07-08-2025



Approved Signatory
Renee Luna-Trepczynski

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC

1501 West Knudsen Drive, Phoenix, AZ 85027

(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.55; Kyrene Aprende Middle School -
Multi Purpose

Date of Sampling: 07-02-2025

Date of Receipt: 07-08-2025

Date of Report: 07-08-2025

ASBESTOS PLM REPORT**Total Samples Submitted:** 24**Total Samples Analyzed:** 24**Total Samples with Layer Asbestos Content > 1%:** 0**Location: PLM-1, White 2'x2' Ceiling Tile (Old)**

Lab ID-Version‡: 20661822-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-2, White 2'x2' Ceiling Tile (Old)

Lab ID-Version‡: 20661823-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-3, White 2'x2' Ceiling Tile (Old)

Lab ID-Version‡: 20661824-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-4, White 2'x2' Ceiling Tile (New)

Lab ID-Version‡: 20661825-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.55; Kyrene Aprende Middle School -
Multi Purpose

Date of Sampling: 07-02-2025
Date of Receipt: 07-08-2025
Date of Report: 07-08-2025

ASBESTOS PLM REPORT

Location: PLM-5, White 2'x2' Ceiling Tile (New)

Lab ID-Version‡: 20661826-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-6, White 2'x2' Ceiling Tile (New)

Lab ID-Version‡: 20661827-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-7, White Smooth 2'x2' Ceiling Tile

Lab ID-Version‡: 20661828-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-8, White Smooth 2'x2' Ceiling Tile

Lab ID-Version‡: 20661829-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.55; Kyrene Aprende Middle School -
Multi Purpose

Date of Sampling: 07-02-2025
Date of Receipt: 07-08-2025
Date of Report: 07-08-2025

ASBESTOS PLM REPORT

Location: PLM-9, White Smooth 2'x2' Ceiling Tile

Lab ID-Version‡: 20661830-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-10, Beige w/ Tan Specks 12"x12" VCT & Mastic

Lab ID-Version‡: 20661831-1

Sample Layers	Asbestos Content
Beige Floor Tile	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Beige w/ Tan Specks 12"x12" VCT & Mastic

Lab ID-Version‡: 20661832-1

Sample Layers	Asbestos Content
Beige Floor Tile	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Beige w/ Tan Specks 12"x12" VCT & Mastic

Lab ID-Version‡: 20661833-1

Sample Layers	Asbestos Content
Beige Floor Tile	ND
Tan Mastic (Trace)	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
 C/O: Isai Portillo
 Re: AZ1418.55; Kyrene Aprende Middle School -
 Multi Purpose

Date of Sampling: 07-02-2025
 Date of Receipt: 07-08-2025
 Date of Report: 07-08-2025

ASBESTOS PLM REPORT

Location: PLM-13, Blue 4" Cove Base & Mastic

Lab ID-Version‡: 20661834-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-14, Blue 4" Cove Base & Mastic

Lab ID-Version‡: 20661835-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-15, Blue 4" Cove Base & Mastic

Lab ID-Version‡: 20661836-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-16, Blue/Gray 2'x2' Carpet & Mastic

Lab ID-Version‡: 20661837-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Brown Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
 C/O: Isai Portillo
 Re: AZ1418.55; Kyrene Aprende Middle School -
 Multi Purpose

Date of Sampling: 07-02-2025
 Date of Receipt: 07-08-2025
 Date of Report: 07-08-2025

ASBESTOS PLM REPORT

Location: PLM-17, Blue/Gray 2'x2' Carpet & Mastic

Lab ID-Version‡: 20661838-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Brown Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-18, Blue/Gray 2'x2' Carpet & Mastic

Lab ID-Version‡: 20661839-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Brown Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-19, White Fixture Caulking

Lab ID-Version‡: 20661840-1

Sample Layers	Asbestos Content
White Caulk	ND
Sample Composite Homogeneity:	Good

Location: PLM-20, White Fixture Caulking

Lab ID-Version‡: 20661841-1

Sample Layers	Asbestos Content
White Caulk	ND
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC

1501 West Knudsen Drive, Phoenix, AZ 85027

(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.55; Kyrene Aprende Middle School -
Multi Purpose

Date of Sampling: 07-02-2025

Date of Receipt: 07-08-2025

Date of Report: 07-08-2025

ASBESTOS PLM REPORT**Location: PLM-21, White Fixture Caulking**

Lab ID-Version‡: 20661842-1

Sample Layers	Asbestos Content
White Caulk	ND
Sample Composite Homogeneity: Good	

Location: PLM-22, Brown Frame Sealant

Lab ID-Version‡: 20661843-1

Sample Layers	Asbestos Content
Brown Sealant	ND
Sample Composite Homogeneity: Good	

Location: PLM-23, Brown Frame Sealant

Lab ID-Version‡: 20661844-1

Sample Layers	Asbestos Content
Brown Sealant	ND
Sample Composite Homogeneity: Good	

Location: PLM-24, Brown Frame Sealant

Lab ID-Version‡: 20661845-1

Sample Layers	Asbestos Content
Brown Sealant	ND
Sample Composite Homogeneity: Good	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC

1501 West Knudsen Drive, Phoenix, AZ 85027

(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.

C/O: Isai Portillo

Re: AZ1418.55; Kyrene Aprende Middle School -
Multi Purpose

Date of Sampling: 07-02-2025

Date of Receipt: 07-08-2025

Date of Report: 07-08-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Kayla Heinen

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

www.eurofinsus.com/Built



East: (866) 871-1984

Central: (800) 651-4802

West: (833) 465-5857

Built Environment Testing

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

REQUESTED SERVICES

Non-Culturable	Culturable	Other Requests
	BioCocatta™, Andersen SAS Soil	



004136917

CONTACT INFORMATION		
Company:	Dominion Environmental	Address:
Contact:	Isai Portillo	Special Instructions:
Phone:	602-882-6710	

PROJECT INFORMATION			TURN AROUND TIME CODES - (TAT)	
Project ID:	AZ1418.55		STD - Standard (Default)	Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.
Project Description:	Kyrene Aprende Middle School - Multi Purpose		ND - Next Business Day	
Project Zip Code:	Sampling Date/Time:	7/2/25	SD - Same Business Day	
PO Number:	Sampled By:	[Signature]	WH - Weekend/Holiday/ASAP	

[illegible]



SAMPLE TYPE CODES			
BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
	7/7/25		4:55pm 7/7/25

SECTION 10



ASSUMED ACBM LOCATION MAPS

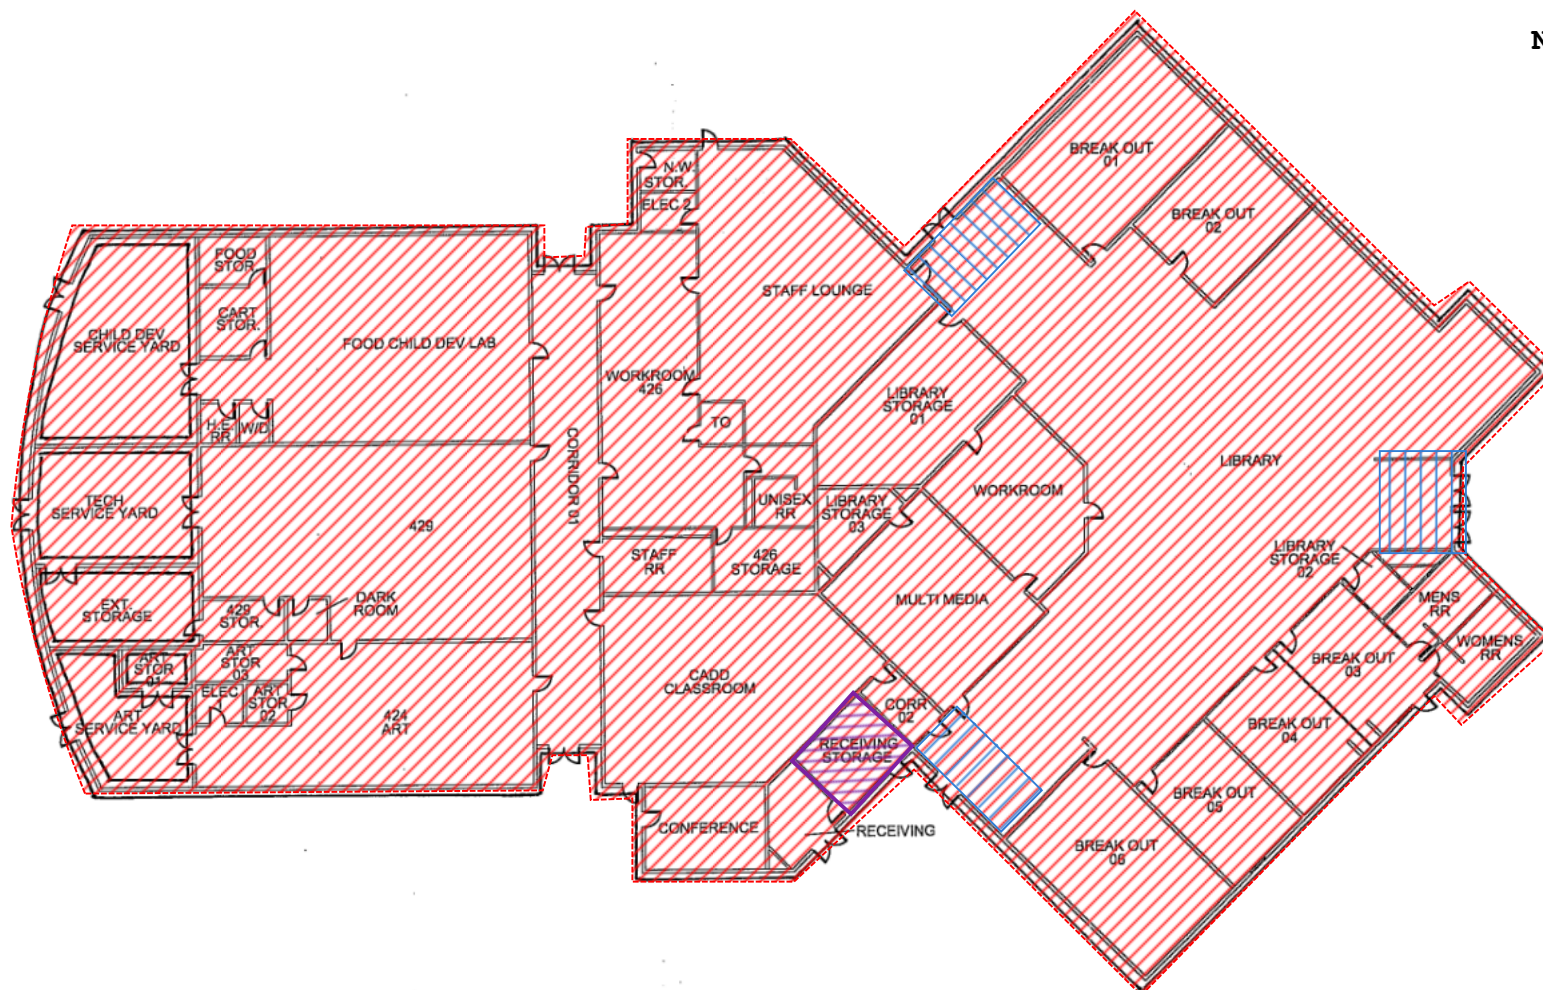

Assumed Asbestos-Containing

Concrete Foundation, Counter/Cabinet
Caulking, & Blue/Gray 2" x 2" Carpet
& Mastic



Assumed Asbestos-Containing

Off-White/Gray Spec 12" x 12"
Vinyl Floor Tile & Mastic




Assumed Asbestos-Containing

Blue 2" x 2" Carpet & Mastic
& Clear Block 9" x 9" Grout



Assumed Asbestos-Containing

Frame Caulking, Brown CMU
Block & Mortar, Brown
Decorative Block & Mortar, &
Brown 16" x 3" CMU Block &
Mortar




Assumed Asbestos-Containing Material Location Map (1)
Kyrene Aprende Middle School
777 North Desert Breeze Blvd. E, Chandler, Arizona

Project No. AZ1418.55

Media Center

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415




Assumed Asbestos-Containing

Gray 2" x 2" Ceramic Floor Tile,
Grout, & Thinset, White 4" x 4"
Ceramic Wall Tile, Grout, & Mastic,
Gray 4" x 4" Ceramic Wall Tile,
Grout, & Mastic, Black 4" x 4"
Ceramic Wall Tile, Grout, & Mastic,
Blue 4" x 4" Ceramic Cove Base Tile,
Grout, & Mastic, & Fixture Caulking



Assumed Asbestos-Containing

Tac Board Wrap & Mastic




Assumed Asbestos-Containing

Black Cove Base & Mastic



Assumed Asbestos-Containing

Gray Sink Coating





Assumed Asbestos-Containing Material Location Map (2)
Kyrene Aprende Middle School
777 North Desert Breeze Blvd. E, Chandler, Arizona

Project No. AZ1418.55

Media Center


Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

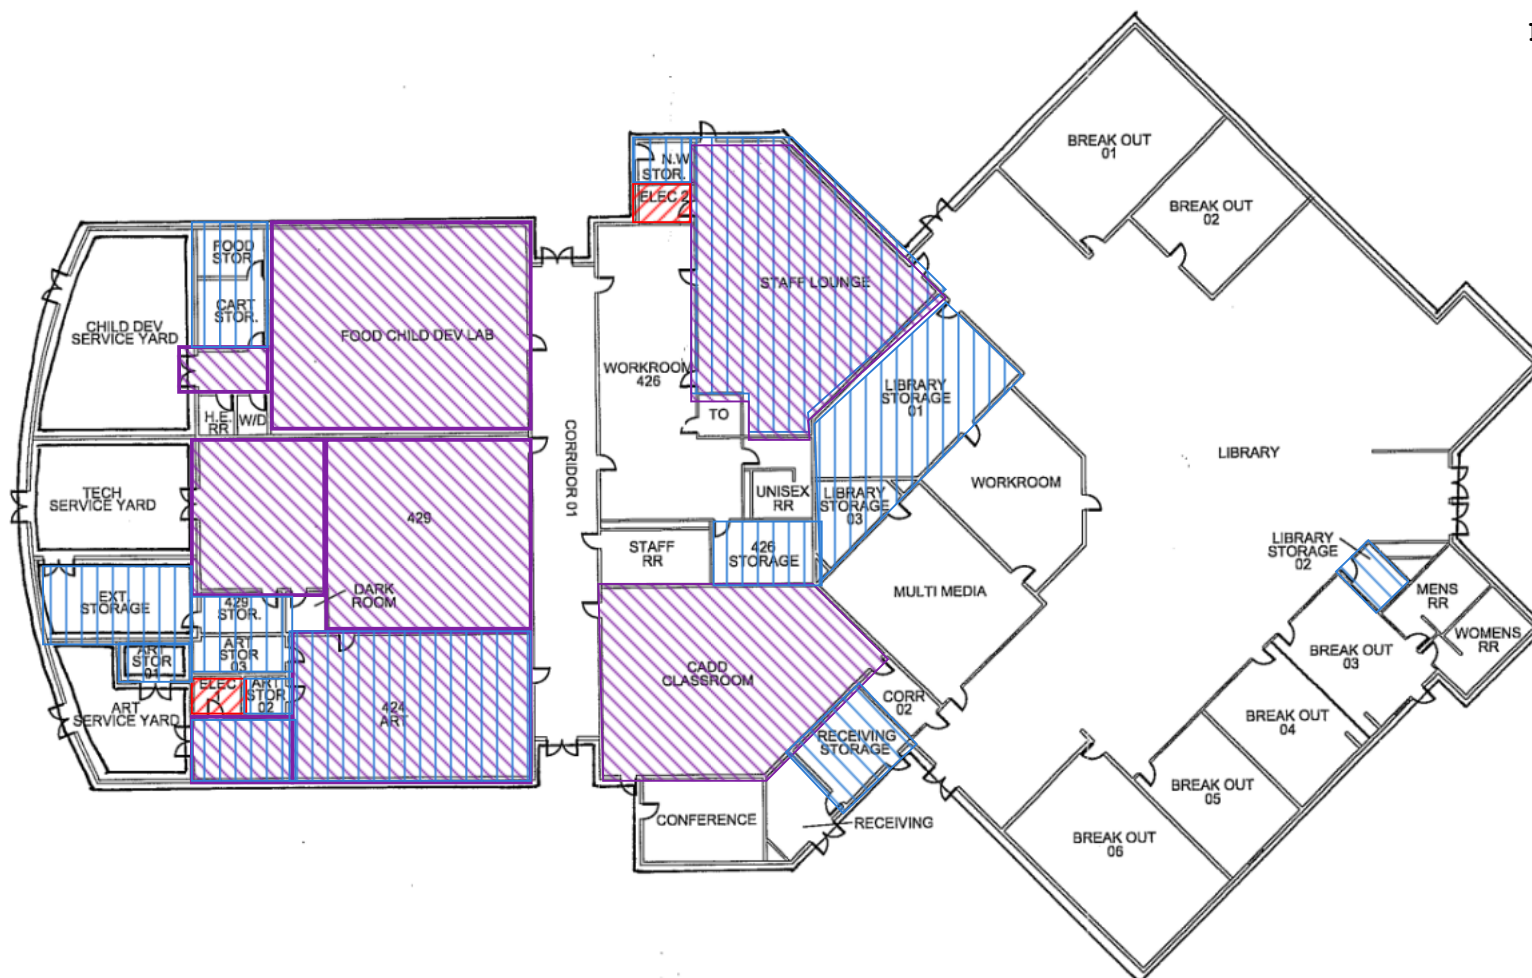

Assumed Asbestos-Containing
Concrete Pad & Smooth Texture
Drywall System



Assumed Asbestos-Containing
Black Chalk Board





Assumed Asbestos-Containing
Gray Cove Base & Mastic

Assumed Asbestos-Containing Material Location Map (3)
Kyrene Aprende Middle School
777 North Desert Breeze Blvd. E, Chandler, Arizona

Project No. AZ1418.55

Media Center

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

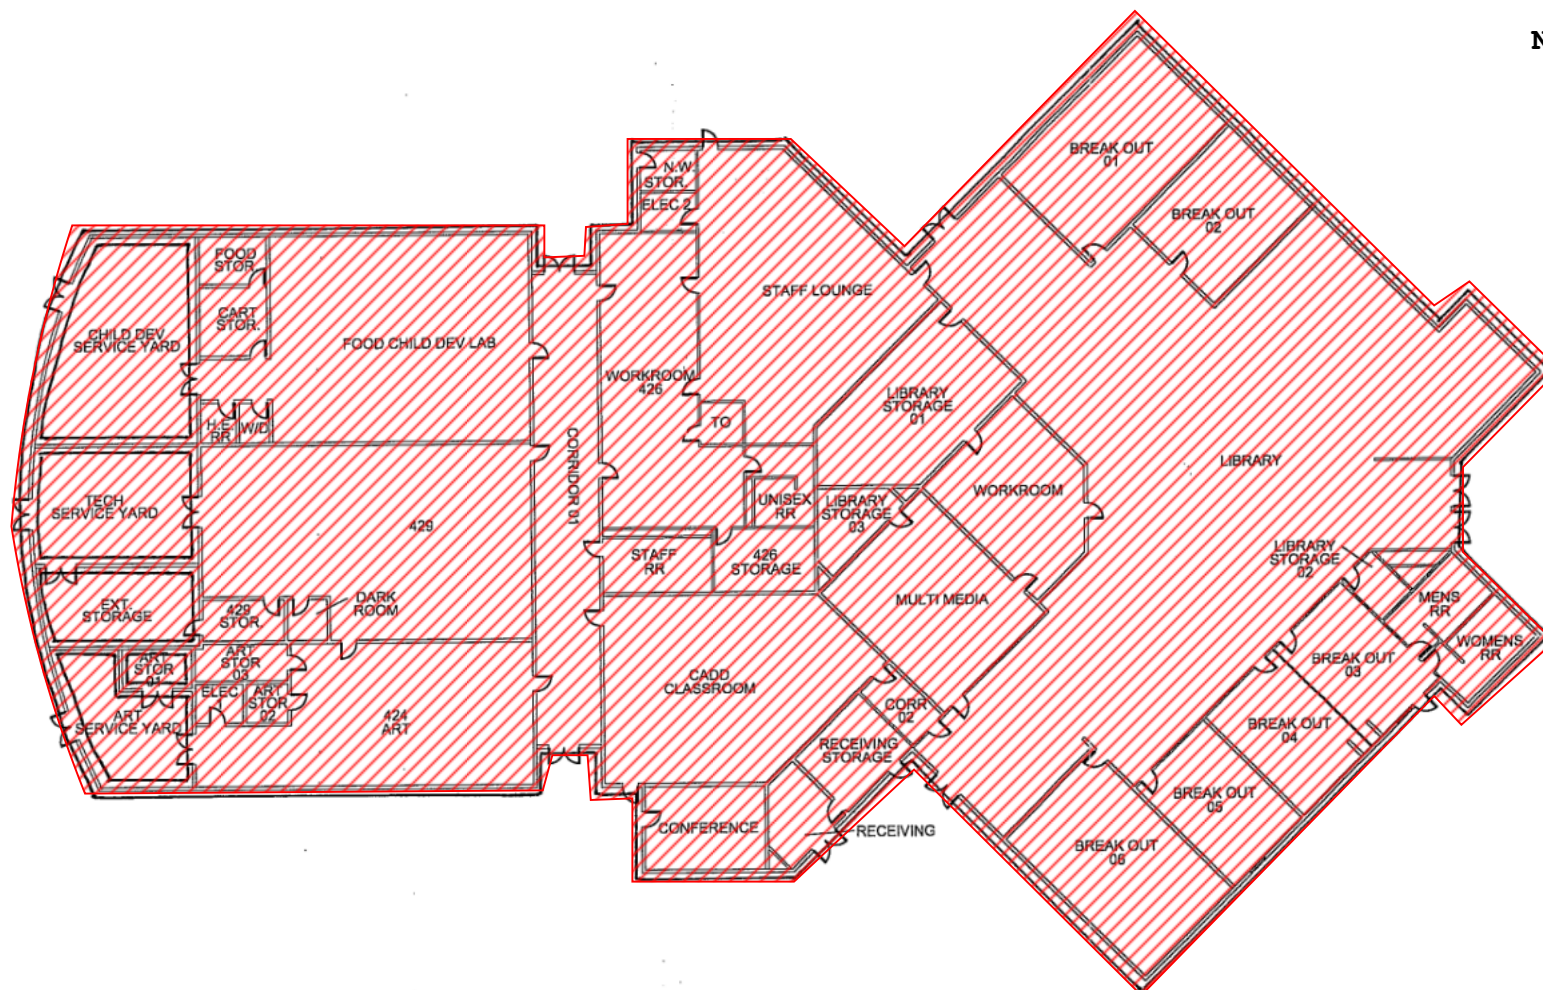

Assumed Asbestos-Containing





Untextured Drywall System, Ceiling Wrap Backing
& Insulation, Gray Duct Mastic, Silver Flex Duct Wrap
& Insulation, Silver Duct Wrap & Insulation,
Pipe Wrap & Insulation, & Red Fire Stop Caulking

* Above the Plenum

Assumed Asbestos-Containing Material Location Map (4)
Kyrene Aprende Middle School
777 North Desert Breeze Blvd. E, Chandler, Arizona

Project No. AZ1418.55

Media Center

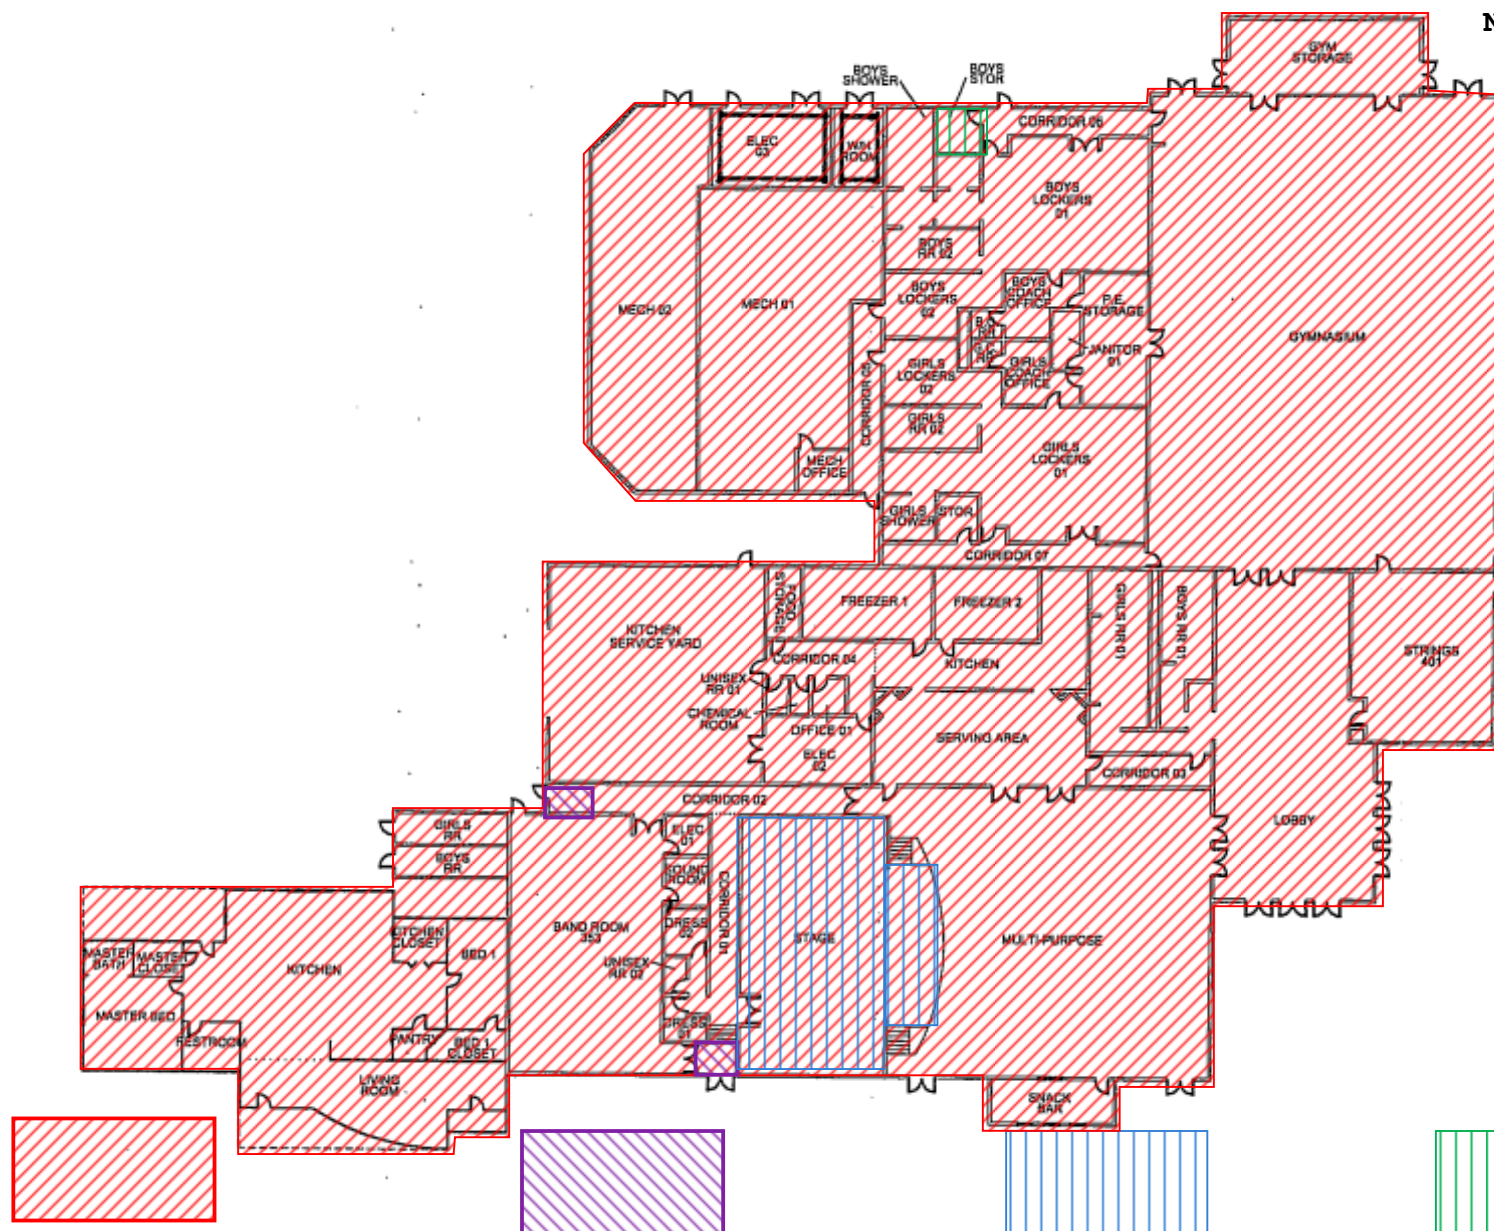

Assumed Asbestos-Containing

Interior Frame Caulking,
White Frame Caulking, 9" x 9"
Block Grout, Concrete Foundation,
Brown 16" x 3" CMU & Mortar,
& Gray Sink Caulking

Assumed Asbestos-Containing


Blue Carpet & Mastic &
Blue 2" x 2" Carpet & Mastic

Assumed Asbestos-Containing

Black Floor Coating

Assumed Asbestos-Containing

Gray Carpet & Mastic





Assumed Asbestos-Containing Material Location Map (1)
Kyrene Aprende Middle School
777 North Desert Breeze Blvd. E, Chandler, Arizona

Project No. AZ1418.55

Gym/Multi-Purpose

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

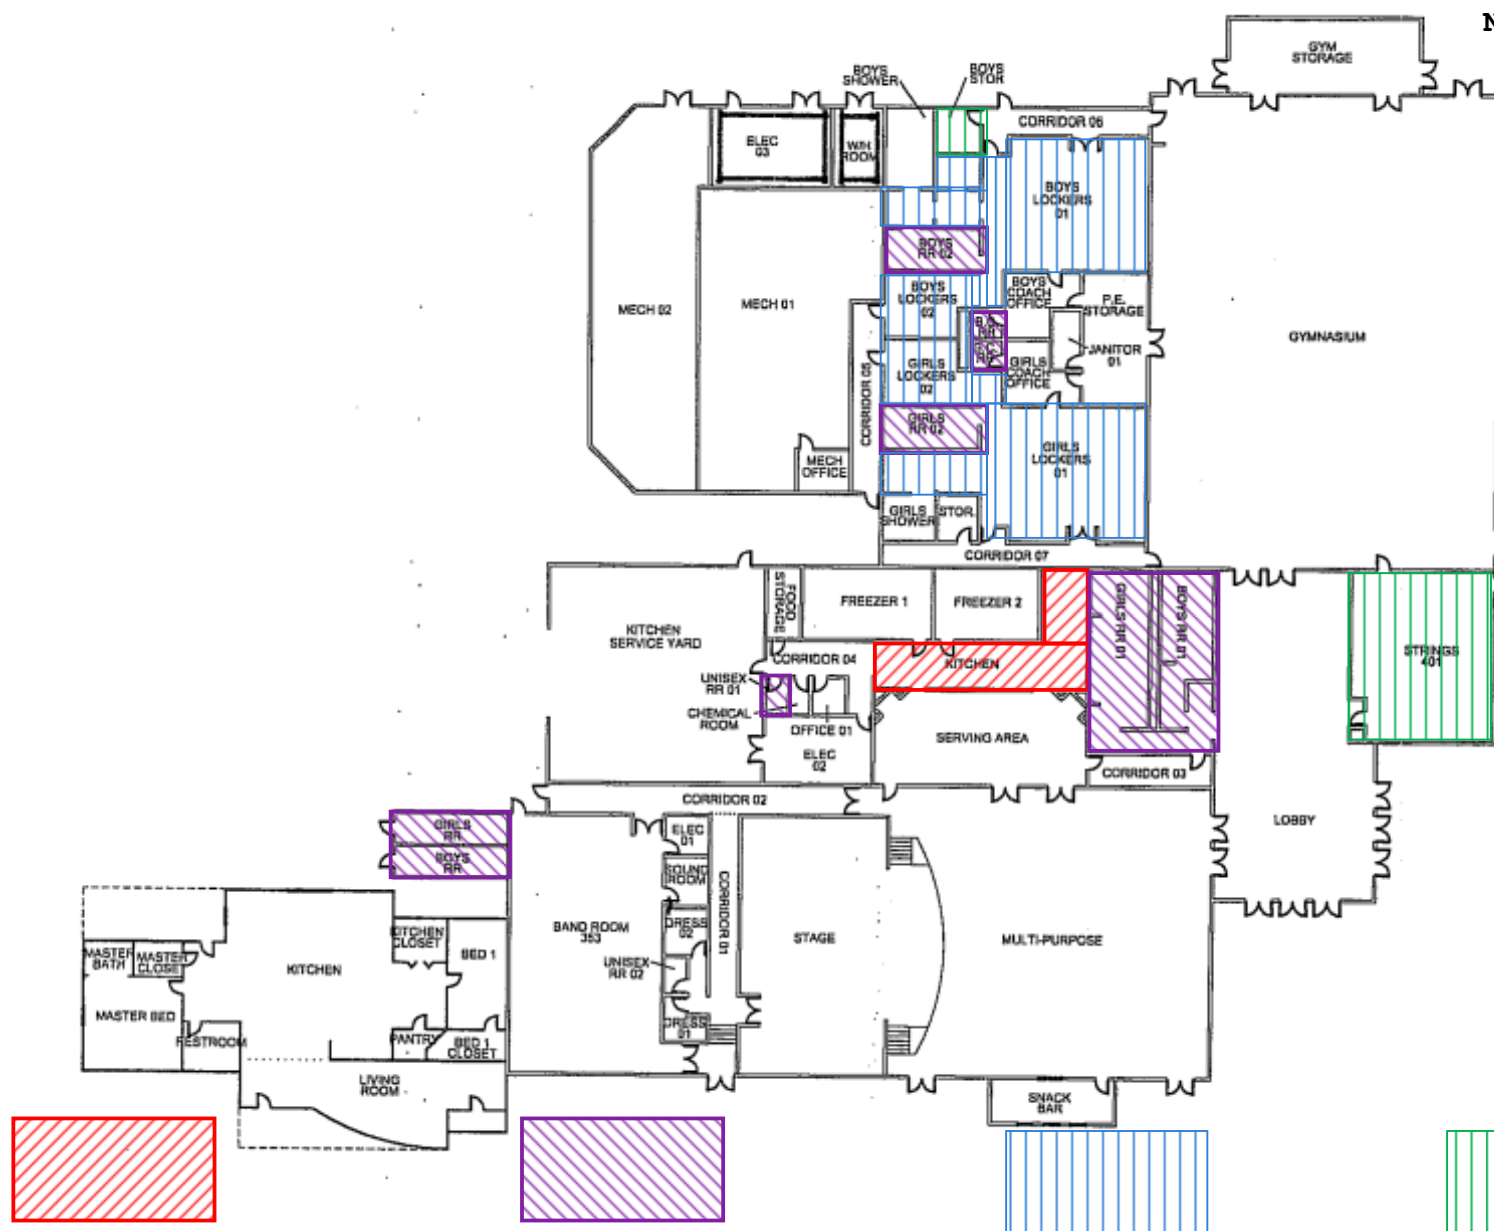

Assumed Asbestos-Containing

4" Brown Cove Base & Mastic,
6" Gray Cove Base & Mastic,
6" x 6" Ceramic Cove Base & Mastic,
& Gray 12" x 12" Ceramic Floor Tile,
Grout, & Mastic

Assumed Asbestos-Containing

Off-White 4" x 4" Ceramic Wall Tile,
Grout, & Thinset, Black 4" x 4"
Ceramic Wall Tile, Grout, & Thinset,
& Navy Blue 4" Ceramic Cove Base & Grout

Assumed Asbestos-Containing

Gray 3" x 6" Ceramic Cove Base,
Grout, & Mastic



Assumed Asbestos-Containing

Black 4" Cove Base & Mastic
& Black Flooring & Mastic

Assumed Asbestos-Containing Material Location Map (2)
Kyrene Aprende Middle School
777 North Desert Breeze Blvd. E, Chandler, Arizona

Project No. AZ1418.55

Gym/Multi-Purpose

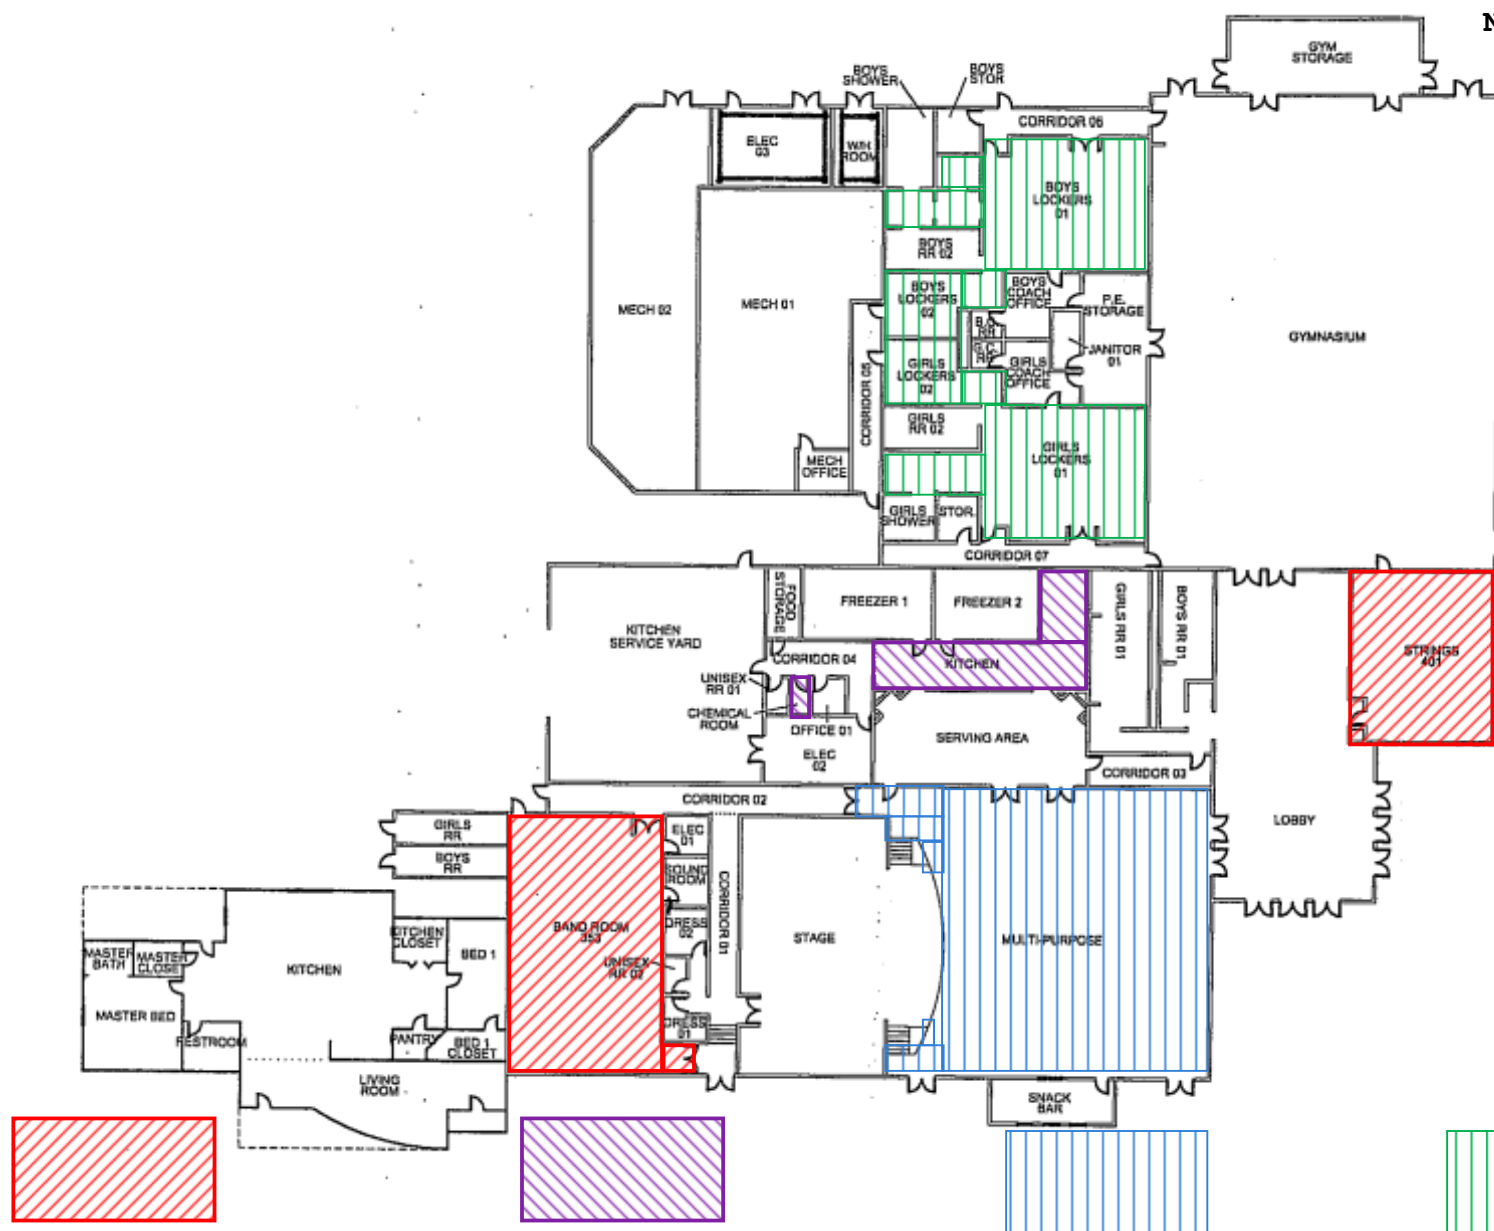

Assumed Asbestos-Containing

Tacboard & Mastic

Assumed Asbestos-Containing

Fiberglass Reinforced Plastic (FRP)
& Mastic

Assumed Asbestos-Containing

4" Gray Cove Base & Mastic
& Silver Backing & Insulation

Assumed Asbestos-Containing


Beige 4" x 4" Ceramic Wall
Tile & Grout

Assumed Asbestos-Containing Material Location Map (3)
Kyrene Aprende Middle School
777 North Desert Breeze Blvd. E, Chandler, Arizona

Project No. AZ1418.55

Gym/Multi-Purpose

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

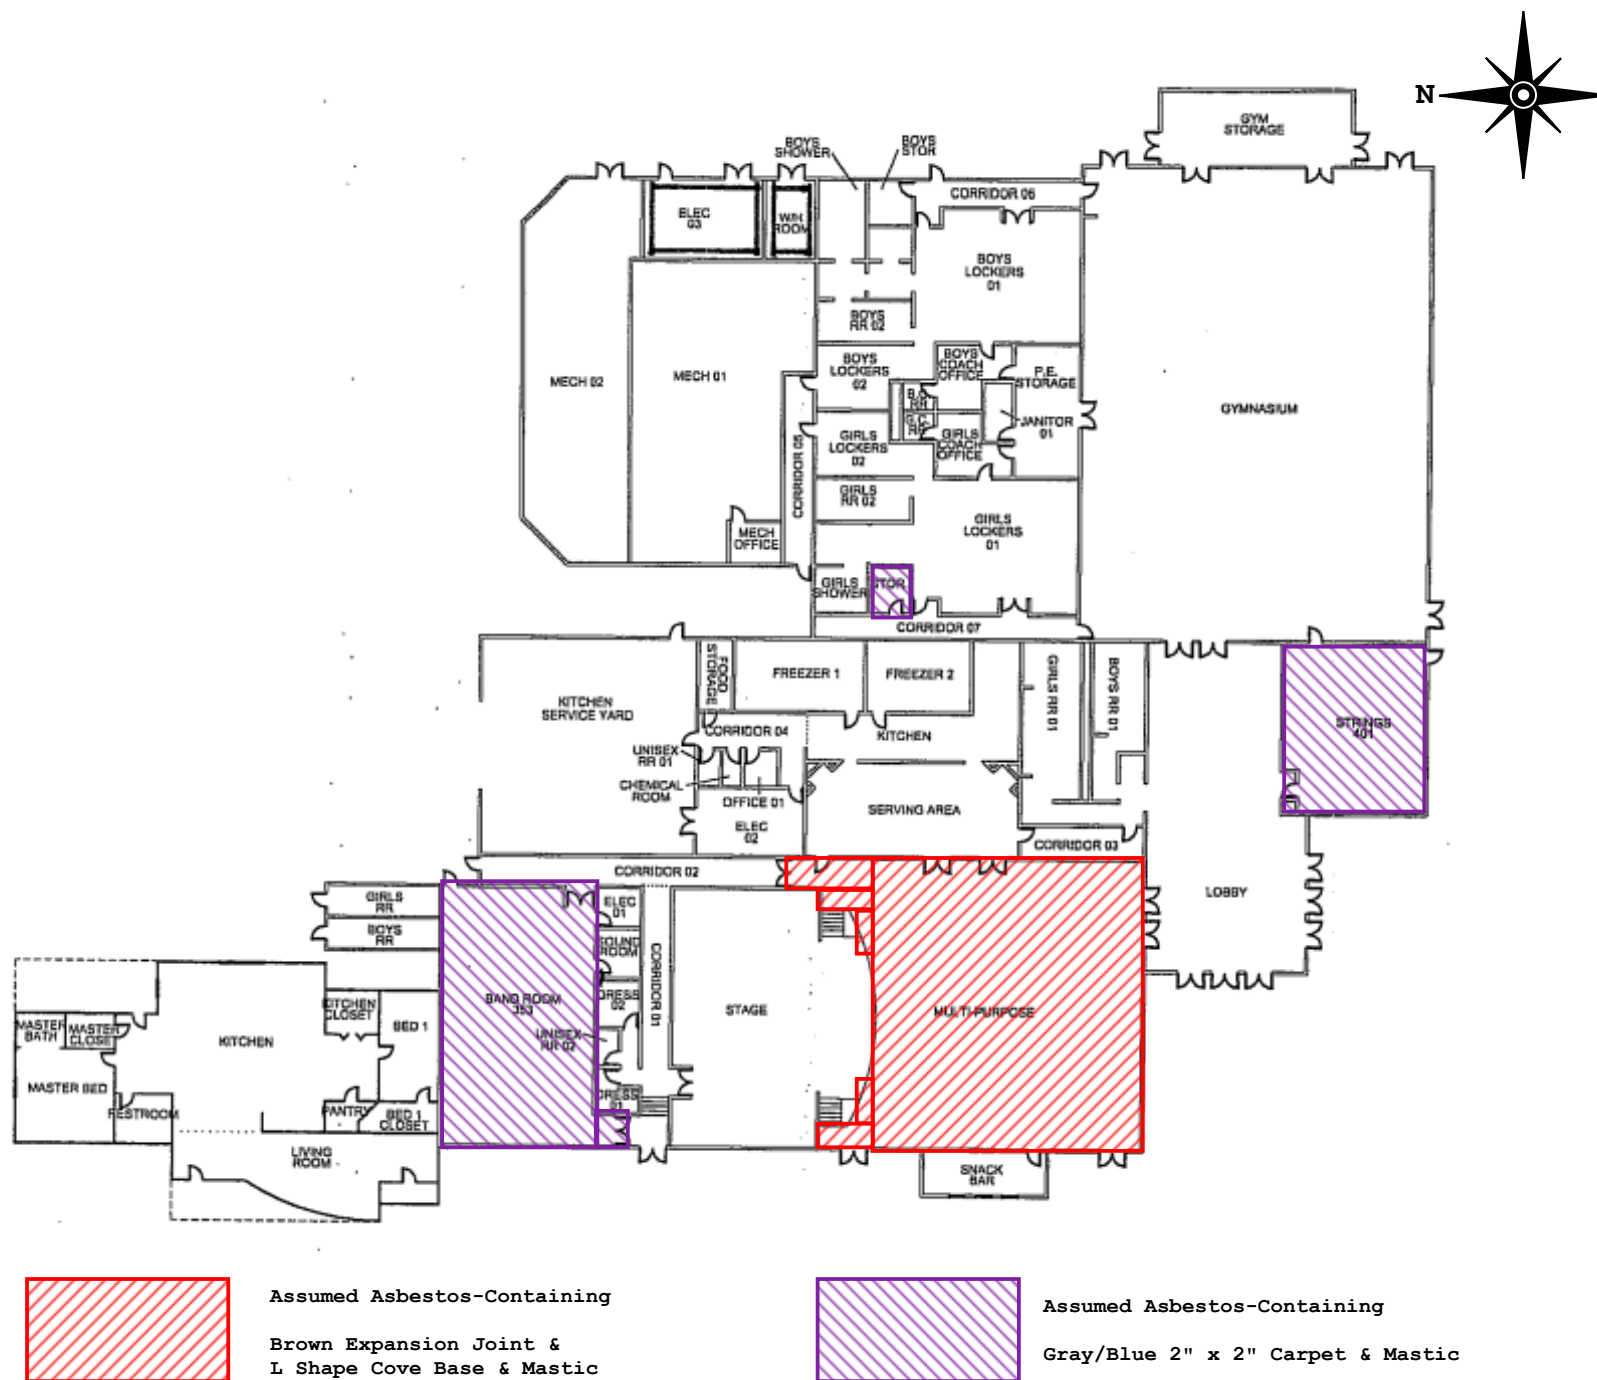


Assumed Asbestos-Containing Material Location Map (4)
 Kyrene Aprende Middle School
 777 North Desert Breeze Blvd. E, Chandler, Arizona

Project No. AZ1418.55

Gym/Multi-Purpose

Dominion Environmental Consultants, Inc.
 20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

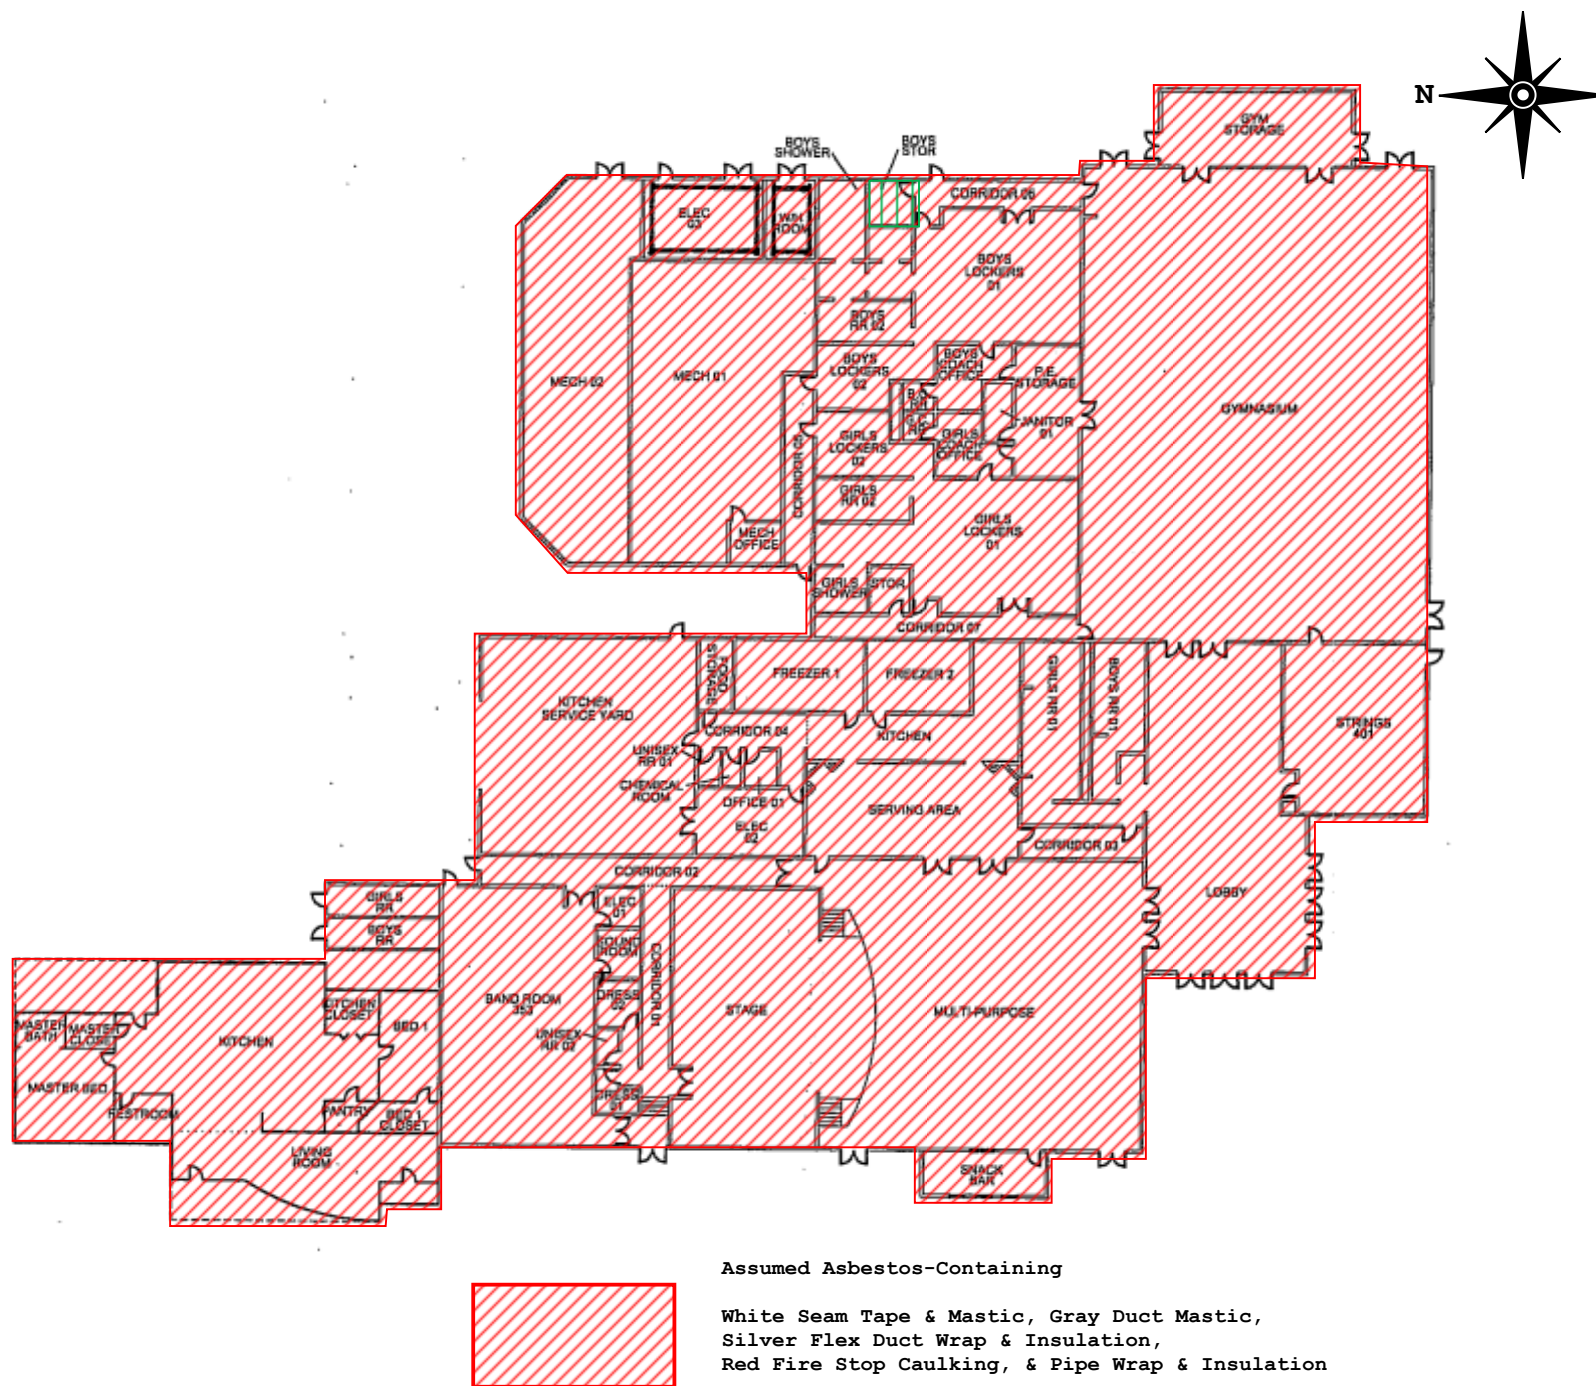

Assumed Asbestos-Containing Material Location Map (5)
Kyrene Aprende Middle School
777 North Desert Breeze Blvd. E, Chandler, Arizona

Project No. AZ1418.55

Gym/Multi-Purpose

SECTION 11



INSPECTOR ACCREDITATIONS

THE ASBESTOS INSTITUTE

Certifies that

Isai Portillo

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on


December 12, 2024

and successfully completed and passed the competency exam.

Certificate:
ON-188748-19438-121224

Date of Examination:
12-Dec-2024

Date of Expiration:
12-Dec-2025



J. Cavness
Director



Approved Instructor

THE ASBESTOS INSTITUTE

20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

FL Course # CRS228

The person receiving this certificate has completed the requisite training for asbestos accreditation under TSCA Title II.

THE ASBESTOS INSTITUTE

Certifies that

Tracey Carpenter

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

September 05, 2023

and successfully completed and passed the competency exam.

Certificate:
ON-4644-14588-090523

Date of Examination:
5-Sep-2023

Date of Expiration:
05-Sep-2024



William T. Cavness
Director



Approved Instructor

THE ASBESTOS INSTITUTE

20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

The person receiving this certificate has completed the requisite training for asbestos accreditation under TSCA Title II.

THE ASBESTOS INSTITUTE

Certifies that

Xin Lou

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

September 23, 2023

and successfully completed and passed the competency exam.

Certificate:
ON-4644-548-092323

Date of Examination:
23-Sep-2023

Date of Expiration:
23-Sep-2024



William T. Cavness
Director



Approved Instructor

THE ASBESTOS INSTITUTE

20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

The person receiving this certificate has completed the requisite training for asbestos accreditation under TSCA Title II.

THE ASBESTOS INSTITUTE

Certifies that

Nicholas Marcos

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

April 03, 2020

and successfully completed and passed the competency exam.


Certificate:
ON-4644-8873-040320

Date of Examination:
3-Apr-2020

Date of Expiration:
03-Apr-2021



William T. Cavness
Director



Approved Instructor

THE ASBESTOS INSTITUTE

20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

This training meets all requirements for asbestos certification under Toxic Substance Control Act Title II.

SECTION 12



LABORATORY ACCREDITATIONS

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500031-0

Eurofins EMLab P&K

Phoenix, AZ

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Asbestos Fiber Analysis

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communiqué on ISO/IEC 17025).*

2025-01-01 through 2025-12-31

Effective Dates



A handwritten signature in blue ink, reading "Dana S. Laman".

For the National Voluntary Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

Eurofins EMLab P&K

1501 W. Knudsen Dr.

Phoenix, AZ 85027-1307

Joshua Snyder

Phone: 800-651-4802

Email: joshua.snyder@et.eurofinsus.com

<https://www.eurofinsus.com/environment-testing/built-environment/>

ASBESTOS FIBER ANALYSIS

NVLAP LAB CODE 500031-0

Bulk Asbestos Analysis

Code


Description

18/A01

EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples

18/A03

EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials



For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500031-0

Eurofins EMLab P&K

Phoenix, AZ

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Asbestos Fiber Analysis

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2024-01-01 through 2024-12-31

Effective Dates



A handwritten signature in blue ink, reading "Dana S. Laman". The signature is fluid and cursive.

For the National Voluntary Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

Eurofins EMLab P&K

1501 W. Knudsen Dr.

Phoenix, AZ 85027-1307

Claudia Palermo

Phone: 856-334-1001

Email: claudia.palermo@et.eurofinsus.com

<https://www.eurofinsus.com/environment-testing/built-environment/>

ASBESTOS FIBER ANALYSIS

NVLAP LAB CODE 500031-0

Bulk Asbestos Analysis

Code


Description

18/A01

EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples

18/A03

EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials



For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 500031-0

Eurofins EMLab P&K

Phoenix, AZ


*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Asbestos Fiber Analysis

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2020-01-01 through 2020-12-31

Effective Dates

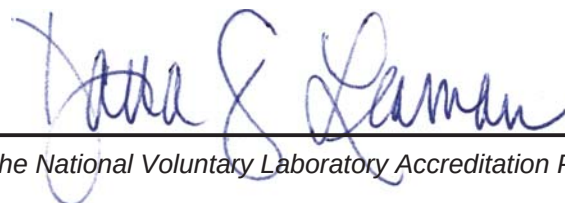

Dana S. Laman
For the National Voluntary Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2005

Eurofins EMLab P&K
1501 W. Knudsen Dr.
Phoenix, AZ 85027-1307
Dan Shelby
Phone: 623-298-1015
Email: dshelby@emlabpk.com
<http://www.emlab.com>

ASBESTOS FIBER ANALYSIS

NVLAP LAB CODE 500031-0

Bulk Asbestos Analysis

Code


Description

18/A01

EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples

18/A03

EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials

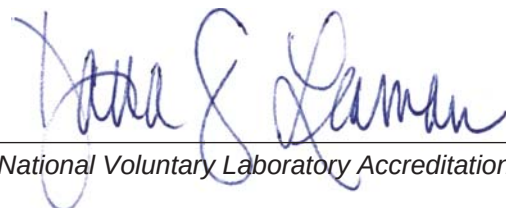

For the National Voluntary Laboratory Accreditation Program