

Prepared for:

**Kyrene Elementary School District
8700 South Kyrene Road
Tempe, Arizona 85284**

**AHERA ASBESTOS
MANAGEMENT
PLAN**

FOR

**KYRENE AKIMEL A-AL MIDDLE SCHOOL
2720 EAST LIBERTY LANE
PHOENIX, ARIZONA 85048**

Prepared by:



Dominion Environmental Consultants, Inc.
20045 North 19th Avenue, Building 7
Phoenix, Arizona 85027
(623) 516-1415

March 11, 2025

TABLE OF CONTENTS

GENERAL INVENTORY	SECTION 1
INSPECTION REPORT	SECTION 2
DESIGNATED PERSON IDENTIFICATION.....	SECTION 3
AHERA TRAINING CERTIFICATIONS OF SCHOOL STAFF MEMBERS....	SECTION 4
RESPONSE ACTIONS WITH DETAILS, REASONS, & SCHEDULES.....	SECTION 5
ACCREDITATION STATEMENT	SECTION 6
REMAINING ACBM	SECTION 7
OPERATIONS & MAINTENANCE PLAN	SECTION 8
EXAMPLE OF INITIAL & ANNUAL NOTIFICATION LETTER	SECTION 9
COST ESTIMATION.....	SECTION 10
MANAGEMENT PLANNER OPTIONAL COMPLIANCE STATEMENT.....	SECTION 11
SIGNED STATEMENT BY DESIGNATED PERSON.....	SECTION 12

SECTION 1



GENERAL INVENTORY

Dominion Environmental Consultants, Inc.
General Inventory

Client: Kyrene Elementary School District		Campus: Kyrene Akimel A-al Middle School			
Date: March 11, 2025		Address: 2720 East Liberty Lane, Phoenix, Arizona 85048			
Building	Building Description	BSC or AL	Friable ACBM	Non-Friable ACBM	Assumed ACBM
Main Building	Classrooms, Media Center, Restrooms, Gymnasium Multi-Purpose Room, Storage, Room, Locker Rooms, Janitor's Closet, Offices, and Kitchen	BSC	No	None	Yes
Concession Building	Concession, Storage, Electrical, Maintenance, Equipment Yard, and Restrooms	BSC	No	None	Yes

Key:

BSC = Bulk Samples Collected

Architectural Letter = AL



SECTION 2



INSPECTION REPORT

Prepared for:

Kyrene Elementary School District No. 28
8700 South Kyrene Road
Tempe, Arizona 85284

**AHERA ASBESTOS
INSPECTION REPORT**

FOR

**KYRENE AKIMEL A-AL MIDDLE SCHOOL
2720 EAST LIBERTY LANE
PHOENIX, ARIZONA 85048**

PURCHASE ORDER NO. 251702

Prepared by:



Dominion Environmental Consultants, Inc.
20045 North 19th Avenue, Building 7
Phoenix, Arizona 85027
(623) 516-1415

Dominion Project Number: AZ1418.53

AHERA Re-Inspection Date: February 11, 2025

TABLE OF CONTENTS

LIMITATIONS	SECTION 1
INSPECTION PROCESS	SECTION 2
EXECUTIVE SUMMARY	SECTION 3
SITE PLANS	SECTION 4
HOMOGENEOUS MATERIALS INVENTORY LISTS	SECTION 5
PLM BULK SAMPLE SHEETS	SECTION 6
PLM BULK SAMPLE LOCATION MAPS.....	SECTION 7
PHYSICAL ASSESSMENT INFORMATION SHEETS	SECTION 8
LABORATORY REPORTS	SECTION 9
ASSUMED ACBM LOCATION MAPS.....	SECTION 10
INSPECTOR ACCREDITATION	SECTION 11
LABORATORY ACCREDITATION.....	SECTION 12

SECTION 1



LIMITATIONS

LIMITATIONS

The conclusions and results contained herein are based solely on the information presented in this report. The sampling, testing, and observations described in the report represent conditions only at the specified times and locations. Additional materials or information which were hidden, undiscovered, inaccessible, or not a part of the findings presented herein, would result in the modification of the conclusions and recommendations made herein. Any response action guidelines are based solely on the findings contained herein. The response action guidelines are presented as a courtesy and are not to be considered a complete or detailed set of specifications. Dominion performed this survey as directed by the client and in compliance with applicable regulations.

Dominion is not responsible for the accuracy of information provided by others, or for conditions or consequences arising from relevant facts that were withheld, concealed, undiscovered, or not fully disclosed. Dominion is not a law firm, and therefore, makes no representations regarding any potential liability of any person or entity for site conditions. Further, Dominion is not qualified to present medical advice. If any present or future health issues are in question, it is recommended that the findings in this report be presented to a qualified medical professional for evaluation.

Kyrene Akimel A-al Middle School is currently being used daily, therefore, to avoid conspicuous damage and a possible trip and fall hazard, Dominion was only able to check for secondary flooring layers in the corners of each room. Therefore, if the carpets are to be replaced, additional investigation should be performed under other areas of the flooring to assure that an undetected second layer of flooring does not exist. Any necessary samples should be collected by a certified inspector prior to the disturbance of any discovered unsampled flooring.

Additional materials or information which were hidden, undiscovered, inaccessible, or are not a part of the finding presented herein, would result in the modification of the conclusions and recommendations made herein. Changes over which Dominion has no control, including but not limited to, the passage of time, manifestation of latent conditions, or occurrence of future events, require reevaluation of the findings, observations, and conclusions expressed in the report.

The limited sampling, testing, and observations described in the report represent conditions only at specified times and locations. These limited sampling methods, techniques, and scope of services were not comprehensive or to be considered all inclusive. Dominion is not responsible for the accuracy of information or services provided by others, including but not limited to other consultants, analytical laboratories, or public records. Dominion is not liable for conditions or consequences arising from relevant facts that were withheld, concealed, undiscovered, or not fully disclosed. Dominion performed this survey in a specific area as directed by the Client and in compliance with applicable regulations.

Dominion's scope of service for this report did not include the inspection for, or identification of fungi, lead paint, or any other hazardous or controlled substances not specifically identified herein. This report presents professional opinions and findings of a scientific or technical nature.

SECTION 2



INSPECTION PROCESS

INSPECTION PROCESS

The Environmental Protection Agency (EPA) in 40 CFR 763, the Asbestos Hazard Emergency Response Act (AHERA), requires Local Education Agencies (LEAs) to identify friable and non-friable asbestos-containing building material (ACBM) in public and private elementary and secondary schools by visually inspecting school buildings for such materials and by sampling all identified suspect materials if they are not assumed to be ACBM. Those samples are then to be analyzed using appropriate analysis techniques, by a qualified laboratory, as referred to in the regulations. AHERA requires LEAs to only utilize accredited personnel when conducting inspections, re-inspections, developing management plans, or performing response actions. This regulation also includes record-keeping requirements. LEAs may contractually delegate their duties under this rule, but they remain responsible for the proper performance of those duties. LEAs are encouraged to consult with EPA Regional Asbestos Coordinators, or if applicable a State's lead agency designated by the State Governor, for assistance in complying with this rule.

This report complies with AHERA based protocols outlined in 40 CFR 763.85, specifically:

- The campus was visually inspected to identify the locations of all suspected ACBM.
- All suspect materials were touched to determine friability and condition.
- Bulk samples were collected of all homogeneous areas of friable suspected ACBM and all homogeneous areas of non-friable suspected ACBM.
- The date of the inspection, the name and signature of the person making the inspection, State of accreditation, his or her accreditation number and any changes in the condition of known or assumed ACBM are included in this report, if applicable.
- The exact locations where samples were collected during the inspection are marked, as well as a description of the manner used to determine sampling locations, the name and signature of each accredited inspector who collected the samples, State of accreditation and if applicable, his or her accreditation number.
- Also included within the report are any assessments or reassessments made of friable material, the name and signature of the accredited inspector making the assessments, State of accreditation and if applicable, his or her accreditation number.

The sampling protocol outlined in 40 CFR 763.86 is as follows:

Surfacing material is material in a school building that is sprayed-on, troweled-on, or otherwise applied to surfaces, such as acoustical plaster on ceilings and fireproofing materials on structural members, or other materials on surfaces for acoustical, fireproofing, or other purposes. Surfacing materials are collected in a statistically random manner as follows:

- At least three (3) bulk samples shall be collected from each homogeneous area that is one thousand (1,000) square feet.

- At least five (5) bulk samples shall be collected from each homogeneous area that is greater than one thousand (1,000) square feet but less than or equal to five thousand (5,000) square feet.
- At least seven (7) bulk samples shall be collected from each homogeneous area that is greater than five thousand (5,000) square feet.

Thermal system insulation (TSI) in a school building means materials applied to pipes, fittings, boilers, breeching, tanks, ducts, or other interior structural components to prevent heat loss or gain, or water condensation, or for other purposes. TSI samples are collected in a randomly distributed manner as follows:

- A minimum of three (3) bulk samples are collected from each homogeneous area of TSI that is not assumed to be ACBM.
- Collect at least one (1) bulk sample from each homogeneous area of patched TSI that is not assumed to be ACBM if the patched section is less than six (6) linear or square feet.
- In a manner sufficient to determine whether the material is ACBM or not ACBM, collect bulk samples from each insulated mechanical system that is not assumed to be ACBM where cement or plaster is used on fittings such as tees, elbows, or valves.
- Bulk samples are not required to be collected from any homogeneous area where the accredited inspector has determined that the TSI is fiberglass, foam glass, rubber, or other non-ACBM.

Miscellaneous material is sampled in a manner sufficient to determine whether the material is ACBM or not ACBM. An accredited inspector shall collect bulk samples from each homogeneous area of friable miscellaneous material that is not “assumed” to be ACBM. Therefore, Dominion will collect a minimum of three (3) samples of each miscellaneous material, as a matter of industry standards.

ASSESSMENT OF MATERIALS

In compliance with 40 CFR 763.88, Dominion inspectors have classified the ACBM and suspected ACBM in the school buildings into one of the following categories:

- (1) Damaged or significantly damaged Thermal System Insulation ACBM
- (2) Damaged friable surfacing ACBM
- (3) Significantly damaged friable surfacing ACBM
- (4) Damaged or significantly damaged friable miscellaneous ACBM
- (5) ACBM with potential for damage
- (6) ACBM with potential for significant damage
- (7) Any remaining friable ACBM or friable suspected ACBM

As part of the assessment, the following issues have been taken into consideration:

- i. Location and the amount of the material, both in total quantity and as a percentage of the functional space.
- ii. The type of damage or significant damage (e.g., flaking, blistering, water damage, or other signs of physical damage).
- iii. The severity of damage (e.g., major flaking, severely torn jackets, as opposed to occasional flaking, minor tears to jackets).
- iv. Extent or spread of damage over large areas or large percentages of the homogeneous area.
- v. Whether the material is accessible.
- vi. The material's potential for disturbance.
- vii. Known or suspected causes of damage or significant damage (e.g., air erosion, vandalism, vibration, water).
- viii. Preventive measures might eliminate the reasonable likelihood of undamaged ACBM from becoming significantly damaged.

SECTION 3



EXECUTIVE SUMMARY

EXECUTIVE SUMMARY

INTRODUCTION

Dominion Environmental Consultants, Inc. (Dominion) was authorized, by Mr. Mason Meade with the Kyrene Elementary School District (KESD), to perform the Initial AHERA Asbestos Inspection of Kyrene Akimel A-al Middle School, located at 2720 East Liberty Lane in Phoenix, Arizona, via a written Purchase Order #251702, dated February 4, 2025.

Due to budgetary constraints, Dominion was directed by Mr. Meade to first sample the accessible building materials inside the building until a pre-determined number of samples were collected. Once the allotted number of samples per building had been collected, Dominion was then directed to "assume as asbestos-containing" the remaining suspect building materials. Pursuant to Mr. Meade's directions, the sampling order of importance was determined first on materials with the largest square footage, then least accessible materials, ceramic tiles, and materials least likely to be disturbed.

Dominion was also instructed to utilize Dominion's previous Limited Asbestos Reports, Project Numbers AZ0959.856 dated January 15, 2015, AZ1418.05 dated June 8, 2017, AZ0959.2727 dated June 7, 2021, AZ0959.3119 dated July 20, 2022, AZ0959.3384 dated May 15, 2023, and AZ1418.11 dated March 11, 2024. Per the direction of Mr. Meade, Dominion was instructed to utilize the information from these previous reports and to only collect additional bulk samples of any previously unsampled building materials.

Kyrene Akimel A-al Middle School campus consists of one (1) single story, slab on grade, block structure and one (1) two story block structure. No below grade levels were observed for any building on campus.

BACKGROUND INFORMATION

INITIAL LIMITED AHERA ASBESTOS SURVEY – JANUARY 2015

Dominion's Limited Asbestos Inspections of the Kyrene Akimel A-al Kitchen's Office & Room D-01 of the Gymnasium Building was conducted on January 15, 2015, by Mr. Robert H. Duncan, an AHERA accredited Asbestos Building Inspector (State of Arizona #F 9965, expiration date May 2, 2015).

2017 LIMITED AHERA ASBESTOS SURVEY – JUNE 2017

Dominion's Limited Asbestos Inspections of the Kyrene Akimel A-all Second Floor Restrooms was conducted on June 8, 2017, by Ms. Krista Wahnefried, an AHERA accredited Asbestos Building Inspector (State of Arizona #25511-2447693-311078, expiration date August 29, 2017).

2021 LIMITED AHERA ASBESTOS SURVEY – JUNE 2021

Dominion's Limited Asbestos Inspections of the Kyrene Akimel A-al Kitchen was conducted on June 7, 2021, by Mr. Xin Lou, an AHERA accredited Asbestos Building Inspector (State of Arizona #4644-548-091520, expiration date September 15, 2021).

2022 LIMITED AHERA ASBESTOS SURVEY – JULY 2022

Dominion's Limited Asbestos Inspections of the Kyrene Akimel A-al D9 PE Coach Offices, Locker Rooms, Restrooms, Custodial Room, and Storage Room was conducted on May 16, 2023, by Mr. Nicolas Marcos, an AHERA accredited Asbestos Building Inspector (State of Arizona #4644-8873-032422, expiration date March 24, 2023).

2023 LIMITED AHERA ASBESTOS SURVEY – MAY 2023

Dominion's Limited Asbestos Inspections of the Kyrene Akimel A-al Room D9 was conducted on July 20, 2022, by Mr. Xin Lou, an AHERA accredited Asbestos Building Inspector (State of Arizona #4644-548-092022, expiration date September 20, 2023).

2024 LIMITED AHERA ASBESTOS SURVEY – March 2024

Dominion's Limited Asbestos Inspections of the Kyrene Akimel A-al Gymnasium and Concession Buildings was conducted on March 11, 2024, by Ms. Tracey Carpenter, an AHERA accredited Asbestos Building Inspector (State of Arizona #4644-14588-090523, expiration date September 5, 2024).

2025 AHERA ASBESTOS RE-INSPECTION – FEBRUARY 2025

Dominion's AHERA Asbestos Inspection, of the Kyrene Akimel A-al Middle School was conducted on February 11, 2025, by Mr. Isai Portillo, an AHERA accredited Asbestos Building Inspector. (State of Arizona #ON-188748-19438-121224, expiration date December 12, 2025).

COLLECTION OF BULK SAMPLES

Initial Limited AHERA Asbestos Survey – January 2015

A total of thirty (30) bulk samples were collected from seventeen (17) homogeneous building materials within the Kitchen & Kitchen Office of the Main Building.

Identified in the following list are the seventeen (17) suspect homogeneous building materials sampled during the January 15, 2015 limited asbestos inspection.

Main Building - Kitchen Office – 17 Materials – 0 ACBM

- Orange Peel Texture Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

- Clear Mastic for White Wallpaper
- Blue Cove Base
- Mastic for Blue Cove Base
- 2' x 2' Ridged Ceiling Tile
- Kitchen Orange Peel Texture Drywall System(Paint, Texture, Tape, Joint Compound, & Drywall)
- White 12" x 12" Floor Tile
- Black Mastic for White 12" x 12" Floor Tile
- Brown 12" x 12" Floor Tile
- Black Mastic for Brown 12" x 12" Floor Tile
- Tan Fiberglass Reinforced Plastic (FRP)
- Mastic for Tan Fiberglass Reinforced Plastic (FRP)
- White 4" x 6" Ceramic Cove Base Tile
- Grout for White 4" x 6" Ceramic Cove Base Tile
- Mastic for White 4" x 6" Ceramic Cove Base Tile
- White Fiberglass Reinforced Plastic (FRP)
- Beige Mastic for White Fiberglass Reinforced Plastic (FRP)

2017 Limited AHERA Asbestos Survey – June 2017

A total of sixty-nine (69) bulk samples were collected from thirty-four (34) homogeneous building materials within the Restrooms & Janitor's Closets, Admin, Art Room D5, Room D10 Men's Restroom, & Gym Storage/Janitor's Closet of the Main Building.

Identified in the following list are the thirty-four (34) suspect homogeneous building materials sampled during the June 8, 2017 limited asbestos inspection.

Main Building – Admin, Rooms, Restrooms, Storage, & JC – 34 Materials – 0 ACBM

- White 4" x 4" Ceramic Wall Tile
- White Grout for White 4" x 4" Ceramic Wall Tile
- Cream Mastic for White 4" x 4" Ceramic Wall Tile
- Orange Peel Texture Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)
- White 12" x 12" Floor Tile
- Yellow Mastic for White 12" x 12" Floor Tile
- White Mop Sink Caulking
- Tan Back Splash Mastic
- Blue Cove Base
- Tan Mastic for Blue Cove Base
- Orange Peel Texture Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)
- White Fiberglass Reinforced Plastic (FRP)
- Tan Mastic for White Fiberglass Reinforced Plastic (FRP)

- Tan Metal Back Splash Mastic
- Blue Cove Base
- Tan Mastic for Blue Cove Base
- White Mop Sink Caulking
- Orange Peel Texture Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)
- Fiberglass Reinforced Plastic (FRP)
- Yellow Mastic for Fiberglass Reinforced Plastic (FRP)
- Blue Cove Base
- White Mastic for Blue Cove Base
- 2' x 2' Ceiling Tile
- White 6" x 6" Ceramic Cove Base
- White Grout for White 6" x 6" Ceramic Cove Base
- Cream Mastic for White 6" x 6" Ceramic Cove Base
- Orange Peel Texture Drywall System(Paint, Texture, Tape, Joint Compound, & Drywall)
- White Restroom Fixture Caulking
- Orange Peel Texture Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)
- White Mop Sink Caulking
- Blue Cove Base
- Tan Mastic for Blue Cove Base
- Metal Back Splash Mastic
- Orange Peel Drywall Patch System (Paint, Texture, Tape, Joint Compound, & Drywall)

2021 Limited AHERA Asbestos Survey – June 2021

A total of twelve (12) bulk samples were collected from six (6) homogeneous building materials within the Kitchen.

Identified in the following list are the six (6) suspect homogeneous building materials sampled during the June 7, 2021 limited asbestos inspection.

Main Building - Kitchen - 6 Materials – 0 ACBM

- 2" x 4" Beige Ceramic Wall Tile
- Mastic for 2" x 4" Beige Ceramic Wall Tile
- Grout
- Unfinished Drywall - Brown/Tan
- Fiberglass Reinforced Plastic (FRP)
- Tan Mastic for Fiberglass Reinforced Plastic (FRP)

2022 Limited AHERA Asbestos Survey – July 2022

A total of thirty-nine (39) bulk samples were collected from twenty (20) homogeneous building materials within the Men's & Girl's Coach Office, Storage Areas, & Custodial Closet.

Identified in the following list are the twenty (20) suspect homogeneous building materials sampled during the July 20, 2022 limited asbestos inspection.

Main Building – Coach Offices, Storage Areas, & Custodial Closet - 20 Materials – 0 ACBM

- New 2' x 2' Ceiling Tile
- Old 2' x 2' Ceiling Tile
- Orange Peel Texture Drywall System – Paint (Texture, Tape, Joint Compound, and Drywall with Paper)
- Counter Caulking
- Fiberglass Reinforced Plastic (FRP)
- Tan Mastic for Fiberglass Reinforced Plastic (FRP)
- Restroom Greenboard – Paint (Texture and Drywall)
- Blue Cove Baseboard
- Yellow Mastic for Blue Cove Baseboard
- Fixture Caulking
- Mop Sink Caulking
- Door Frame Caulking
- White 4" x 8" Ceramic Tile
- Mastic for White 4" x 8" Ceramic Tile
- Grout for White 4" x 8" Ceramic Tile
- White 4" x 4" Ceramic Tile
- Grout for White 4" x 4" Ceramic Tile
- Concrete for White 4" x 4" Ceramic Tile
- Pink Insulation
- Brown Paper and Silver Foil Backing for Pink Insulation

2023 Limited AHERA Asbestos Survey – May 2023

A total of twenty-one (21) bulk samples were collected from nine (9) homogeneous building materials within Room D9, Restroom, and Shower.

Identified in the following list are the nine (9) suspect homogeneous building materials sampled during the May 16, 2023 limited asbestos inspection.

Main Building – Room D9, Restroom, and Shower - 9 Materials – 0 ACBM

- Orange Peel Texture Drywall System - White Paint (Texture, Tape, Joint Compound, and Drywall with Paper)
- Blue Cove Base
- Cream Mastic for Blue Cove Base

- White Cabinet Caulking
- White Sink Caulking
- 4" x 4" Off-White Ceramic Wall Tile
- Cream Mastic for 4" x 4" Off-White Ceramic Wall Tile
- White Grout
- White 12" x 12" Beige Vinyl Floor Tile

2024 Limited AHERA Asbestos Survey – March 2024

A total of six (6) bulk samples were collected from five (5) homogeneous building materials within the Halls of the Gymnasium Area and the Men's Restroom of the Concession Building.

Identified in the following list are the five (5) suspect homogeneous building materials sampled during the March 11, 2024 limited asbestos inspection.

Main Building – Halls of the Gymnasium Area- 2 Materials – 0 ACBM

- 12" x 12" Tan Vinyl Floor Tile
- Black/Yellow Mastic for 12" x 12" Tan Vinyl Floor Tile

Concession Building - Men's Restroom - 3 Materials – 0 ACBM

- White Restroom Ceramic Wall Tile
- Tan Grout for White Restroom Ceramic Wall Tile
- Cream Mastic for White Restroom Ceramic Wall Tile

2025 AHERA Asbestos Re-Inspection - March 2025

During the 2025 AHERA Asbestos Re-inspection, a total of seventy-five (75) bulk samples were collected from thirty-nine (39) homogeneous building materials (multiple layers) throughout the Kyrene Akimel A-al Main Building and Concession Building. Identified in the following list are the thirty-nine (39) suspect homogeneous materials Dominion sampled during the 2025 AHERA inspection.

Main Building – Gymnasium Area - 9 Materials – 0 ACBM

- 12" x 12" White/Gray Specs Vinyl Floor Tile (VCT)
- Black Mastic for 12" x 12" White/Gray Specs VCT
- White w/ Black Specs 12" x 12" Vinyl Floor Tile (VCT)
- Yellow Mastic for White w/ Black Specs 12" x 12" VCT
- Black w/ White Specs 12" x 12" Vinyl Floor Tile (VCT)
- Yellow Mastic for Black w/ White Specs 12" x 12" VCT
- White 2" x 2" Ceiling Tile
- Gray/Blue Square Carpet
- Green Mastic for Gray/Blue Square Carpet

Main Building – Section D8 to D9 - 8 Materials – 0 ACBM

- Orange Peel Texture Drywall System – Paint (Texture, Joint Compound with Paint, Tape (Mesh), Tape, Joint Compound, and Drywall with Paper)
- 12" x 12" White w/Gray Specs Vinyl Floor Tile (VCT)
- Black Mastic for 12" x 12" White w/Gray Specs
- Gray/Blue Square Carpet
- Tan Mastic for Gray/Blue Square Carpet
- Blue Cove Base
- Tan Mastic for Blue Cove Base
- White 2' x 2' Ceiling Tile

Main Building – Main Office - 7 Materials – 0 ACBM

- White 2" x 2" Ceiling Tile
- Gray/Blue Square Carpet
- Beige Mastic for Gray/Blue Square Carpet
- Blue 4" Cove Base
- Cream Mastic for Blue 4" Cove Base
- Wallpaper Drywall System – Beige (Compound, Tape, Joint Compound, and Drywall with Paper)
- Untextured Drywall System (Compound, Tape, and Joint Compound)

Main Building – Second Level - 7 Materials – 0 ACBM

- Orange Peel Texture Drywall - White Paint (Texture, Tape, Joint Compound, and Drywall with Paper)
- White w/Gray Specs 12" x 12" Vinyl Floor Tile (VCT)
- Brown/Black Mastic for White w/Gray Specs 12" x 12" VCT
- Gray Fireproofing
- Gray/Blue Square Carpet
- Yellow Mastic for Gray/Blue Square Carpet
- White 2" x 2" Ceiling Tile

Concession Building - 8 Materials – 0 ACBM

- Orange Peel Texture Drywall System - White Paint (Texture, Tape, Joint Compound, and Drywall with Brown Paper)
- Smooth Texture Drywall System - White Paint (Texture, Tape, Joint Compound, and Drywall with Brown Paper)
- Blue 4" Cove Base
- Yellow Mastic for Blue 4" Cove Base
- Gray Concrete Foundation
- Gray Coating for Gray Concrete Foundation

- Tan Brick
- Brown Mortar for Tan Brick

All the suspect bulk samples collected from Kyrene Akimel A-al Middle School were submitted to EMLab P&K (EMLab) in Phoenix, Arizona for analysis using Polarized Light Microscopy (PLM) methods. EMLab used the methods prescribed in Method 40 CFR, Part 763, in the Code of Federal Register in analyzing bulk samples. EMLab is certified by the National *Institute of Standards and Technology* as a National Voluntary Laboratory Accreditation Program (NVLAP), Number 500031-0. The suspect asbestos bulk samples were collected and submitted to the laboratory using established chain-of-custody procedures.

Bulk samples were collected utilizing safety and health practices as required by the Occupational Safety and Health Administration (OSHA). At the time of sample collection, the buildings were not occupied by students. Only limited administrative and custodial staff were present on campus.

ASSUMED ACBM – February 11, 2025

Due to budgetary constraints, KESD instructed Dominion to assume any unsampled suspect building materials as asbestos containing until further asbestos bulk sampling can be budgeted and conducted. Therefore, listed below are the one hundred and thirty-six (136) building materials that were **assumed** to contain greater than one percent (>1%) asbestos.

Main Building – 117 Assumed ACBM

- Brown 16" x 8" CMU
- Mortar for Brown 16" x 8" CMU
- Brown 16" x 3" CMU
- Mortar for Brown 16" x 3" CMU
- Brown 16" x 3" Decorative CMU
- Mortar for Brown 16" x 3" Decorative CMU
- Clear 6" x 6" Block Grout
- Brown Door Sealant
- Floor Expansion Joint
- Off-White 12" x 12" Ceramic Floor Tile
- Grout for Off-White 12" x 12" Ceramic Floor Tile
- Blue 12" x 12" Ceramic Floor Tile
- Grout for Blue 12" x 12" Ceramic Floor Tile
- Fixture Caulking
- Off-White 2" x 2" Ceramic Floor Tile
- Grout for Off-White 2" x 2" Ceramic Floor Tile
- Tan 2" x 2" Ceramic Floor Tile
- Grout for Tan 2" x 2" Ceramic Floor Tile
- Tan 1' x 1' Ceramic Floor Tile
- Grout for Tan 1' x 1' Ceramic Floor Tile

- White 4" x 4" Ceramic Wall Tile
- Grout for White 4" x 4" Ceramic Wall Tile
- White 4" x 4" Ceramic Cove Base Tile
- Grout for White 4" x 4" Ceramic Cove Base Tile
- Black 2" x 2" Ceramic Wall Tile
- Grout for Black 4" x 4" Ceramic Wall Tile
- Beige 2" x 2" Ceramic Wall Tile
- Grout for Beige 2" x 2" Ceramic Wall Tile
- Tac Board Wrap
- Mastic for Tac Board Wrap
- Light Brown w/Black Specs 12" x 12" Vinyl Floor Tile (VCT)
- Mastic for Light Brown w/ Black Specs 12" x 12" VCT
- Blue w/Black Specs 12" x 12" Vinyl Floor Tile (VCT)
- Mastic for Blue w/Black Specs 12" x 12"
- Tan w/Beige Specs 12" x 12" Vinyl Floor Tile (VCT)
- Mastic for Tan w/Beige Specs 12" x 12"
- Black Sink Coating
- 2" x 2" Replacement Ceiling Tile
- Black L-Shaped Cove Base
- Mastic for Black L-Shaped Cove Base
- White Flex Connect Damper
- Brown 4" x 4" Ceramic Wall Tile
- Grout for Brown 4" x 4" Ceramic Wall Tile
- White Paneling
- Mastic for White Paneling
- Gray 12" x 12" Texture Ceramic Tile
- Grout for Gray 12" x 12" Texture Ceramic Tile
- White Smooth 2' x 2' Ceiling Tile
- Tan Smooth 2' x 2' Ceiling Tile
- Silver Caulking
- White Smooth 2' x 4' Ceiling Tile
- Beige 12" x 12" Ceramic Floor Tile
- Grout for Beige 12" x 12" Ceramic Floor Tile
- Black/White Texture 12" x 12" Ceramic Floor Tile
- Grout for Black/White Texture 12" x 12" Ceramic Floor Tile
- Off-White 6" x 4" Ceramic Cove Base
- Grout for Off-White 6" x 4" Ceramic Cove Base
- Black w/White Specs 12" x 12" Vinyl Floor Tile (VCT)
- Mastic for Black w/White Specs 12" x 12" VCT
- Blue 54" x 12" Vinyl w/ Circle Pattern
- Mastic for Blue 54" x 12" Vinyl w/ Circle Pattern
- Gray Sink Coating
- 2' x 4' Ceiling Tile w/ Pin Holes

- Counter Caulking
- Cabinet Caulking
- Interior Frame Caulking
- Concrete Foundation
- Gray 2" x 2" Ceramic Floor Tile
- Grout for Gray 2" x 2" Ceramic Floor Tile
- New White Fiberglass Reinforced Plastic (FRP)
- Mastic for New White Fiberglass Reinforced Plastic
- White w/Black Specs 12" x 12" Vinyl Floor Tile (VCT)
- Mastic for White w/Black Specs 12" x 12" VCT
- White Ceiling Wrap
- Insulation for White Ceiling Wrap
- White Pipe Wrap
- Insulation for White Pipe Wrap
- Ceiling Plaster
- Silver Ceiling Wrap
- Insulation for Silver Ceiling Wrap
- Red Fire Stop Caulking
- Silver Flex Duct Wrap
- Insulation for Silver Flex Duct Wrap
- Untextured Drywall System
- Blue 4" x 4" Ceramic Cove Base Tile
- Grout for Blue 4" x 4" Ceramic Cove Base Tile
- Fiberglass Reinforced Plastic (FRP)
- Mastic for White Fiberglass Reinforced Plastic (FRP)
- Mop Sink Caulking
- White 6" x 6" Ceramic Cove Base
- Grout for White 6" x 6" Ceramic Cove Base
- Black Window Sealant
- Gray Duct Mastic
- Silver Duct Wrap
- Insulation for Silver Duct Wrap
- White Duct Mastic
- Black 2' x 2' Carpet
- Mastic for Black 2' x 2' Carpet
- 9" x 9" Black Grout
- Gray Window Sealant
- Gray Door Sealant
- White w/Gray Specs 12" x 12" Vinyl Floor Tile (VCT)
- Mastic for White w/Gray Specs 12" x 12" VCT
- Beige Rough Texture Wallpaper
- Blue 16" x 16" Vinyl Circle Pattern Tile
- Mastic for Blue 16" x 16" Vinyl Circle Pattern Tile

- Blue 48" x 12" Blue Vinyl Floor Tile (VCT)
- Mastic for Blue 48" x 12" Blue VCT
- Brown 18" x 3" Decorative Block
- Mortar for Brown 18" x 3" Decorative Block
- Black Flex Duct Wrap
- Insulation for Black Flex Duct Wrap
- Skip Trowel Texture Drywall System
- Transite Hood Panel
- 12" x 12" White w/Gray Specs Vinyl Floor Tile (VCT)
- Mastic for 12" x 12" White w/Gray Specs VCT
- Blue 2" x 2" Vinyl Circle Pattern Tile
- Mastic for Blue 2" x 2" Vinyl Circle Pattern Tile

Concession Building - 19 Assumed ACBM

- Tan 2" x 2" Ceramic Floor Tile
- Grout for Tan 2" x 2" Ceramic Floor Tile
- Tan w/White Specs 2" x 2" Ceramic Floor Tile
- Grout for Tan w/White Specs 2" x 2" Ceramic Floor Tile
- Tan w/White Specs 1" x 2" Ceramic Floor Tile
- Grout for Tan w/White Specs 1" x 2" Ceramic Floor Tile
- White 4" x 4" Ceramic Cove Base Tile
- Grout for White 4" x 4" Ceramic Cove Base Tile
- Black 2" x 2" Ceramic Wall Tile
- Grout for Black 2" x 2" Ceramic Wall Tile
- Beige 2" x 2" Ceramic Wall Tile
- Grout for Beige 2" x 2" Ceramic Wall Tile
- Counter Caulking
- Interior Frame Caulking
- Brown 16" x 8" CMU
- Mortar for Brown 16" x 8" CMU
- Brown 16" x 4" CMU
- Mortar for Brown 16" x 4" CMU
- Fixture Caulking

INSPECTION FINDINGS

INITIAL LIMITED AHERA ASBESTOS SURVEY – January 15, 2015

All eighteen (18) of the homogeneous building materials sampled during the January 2015 inspection within the Kitchen Office were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

2017 LIMITED AHERA ASBESTOS SURVEY – June 8, 2017

All thirty-four (34) of the homogeneous building materials sampled during the June 2017 inspection within the Restrooms and Janitor's Closet, Admin, Art Room D5, D10 Men's Restroom, and Gym Storage/Janitor's Closet were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

2021 LIMITED AHERA ASBESTOS SURVEY – June 7, 2021

All six (6) homogeneous building materials sampled during the June 2024 inspection within the Kitchen were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

2022 LIMITED AHERA ASBESTOS SURVEY – July 20, 2022

All twenty (20) homogeneous building materials sampled during the July 2022 inspection within the Men's and Women's Coach Office, Storage Areas, and Custodial Closet were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

2023 LIMITED AHERA ASBESTOS SURVEY – May 15, 2023

All nine (9) homogeneous building materials sampled during the May 2023 inspection within Room D9, Restroom, and Shower were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

2024 LIMITED AHERA ASBESTOS SURVEY – March 11, 2024

All five (5) homogeneous building materials sampled during the March 2024 inspection within the Halls of the Gymnasium Area and the Men's Restroom of the Concession Building were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

2025 AHERA ASBESTOS RE-INSPECTION – May 20, 2025

All thirty-nine (39) of the homogeneous building materials sampled during the May 2025 inspection within the Main Building and Concession Building were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

As shown above, one hundred and thirty-six (136) suspect homogeneous building materials were *assumed* to contain greater than one percent (>1%) asbestos.

RECOMMENDATIONS

Any building material within the Kyrene Akimel A-al Middle School campus not identified in this inspection report that is not wood, glass, or metal, is a suspect ACBM and should not be removed, sanded, ground, abraded, or otherwise disturbed by any person without being first

properly trained as per 40 CFR 763.92 and, or 29 CFR 1926.1101. For detailed recommendations, please refer to the Kyrene De Los Logos Elementary School AHERA Management Plan.

The ACBM or assumed ACBM located within the structures of the Kyrene Akimel A-al Middle School campus can be managed in compliance with the Kyrene Elementary School District AHERA Management Plan until such a time as these building materials become degraded, have become friable, or will be disturbed by ongoing maintenance, renovation, or a demolition activity. Prior to a renovation or demolition activity, the previously listed assumed ACBM should be sampled by an AHERA Certified Building Inspector to determine the presence of asbestos.

At least once every six (6) months after a management plan is in effect, the KESD should conduct periodic surveillance in each building that it leases, owns, or otherwise uses as a school building that contains ACBM.

At least once every three (3) years after a management plan is in effect, the KESD should conduct an inspection of all ACBM on the school campus.

The AHERA inspection is limited to only the interior of the buildings and the underside of any covered walkways. This would mean that the additional suspect building materials found on the exterior of the buildings or structures, that are not regulated by AHERA are regulated by EPA NESHAP and OSHA. Therefore, prior to any disturbance of these un-sampled or newly installed suspect building materials, Dominion recommends that these suspect materials be sampled by an AHERA Certified Building Inspector and analyzed for asbestos content by a qualified laboratory prior to any disturbance.

The property owner or his representatives should retain the services of an independent asbestos consulting firm to monitor the performance of any asbestos abatement activities. The consulting firm should oversee the completeness of any asbestos removal and verify the quality of the air during the removal work and perform final clearance air sampling in accordance with the AHERA guidelines.

All documentation is being provided to the Kyrene Elementary School District and must be retained as a permanent record. Should you have any questions regarding the procedures that were followed on this project, please contact Dominion at any time. Thank you for the opportunity to provide these environmental consulting services.



2025 AHERA Building Inspector

Isai Portillo

AHERA Certificate Number: ON-188748-19438-121224

Expires: December 12, 2025

Historical Information:

2024 AHERA Building Inspector

Tracey Carpenter

AHERA Certificate Number: ON-188748-19438-121224

Expired: September 5, 2024

2023 AHERA Building Inspector

Xin Lou

AHERA Certificate Number: 4644-548-092022

Expired: September 20, 2023

2022 AHERA Building Inspector

Nicholas Marcos

AHERA Certificate Number: 4644-8873-032422

Expired: March 24, 2022

2021 AHERA Building Inspector

Xin Lou

AHERA Certificate Number: 4644-548-091520

Expired: September 15, 2021

2017 AHERA Building Inspector

Krista Wahnefried

AHERA Certificate Number: 255511-2447693-311078

Expired: August 29, 2017

2015 AHERA Building Inspector

Robert H. Duncan



AHERA Certificate Number: F 9965

Expired: May 2, 2015

SECTION 4



SITE MAPS

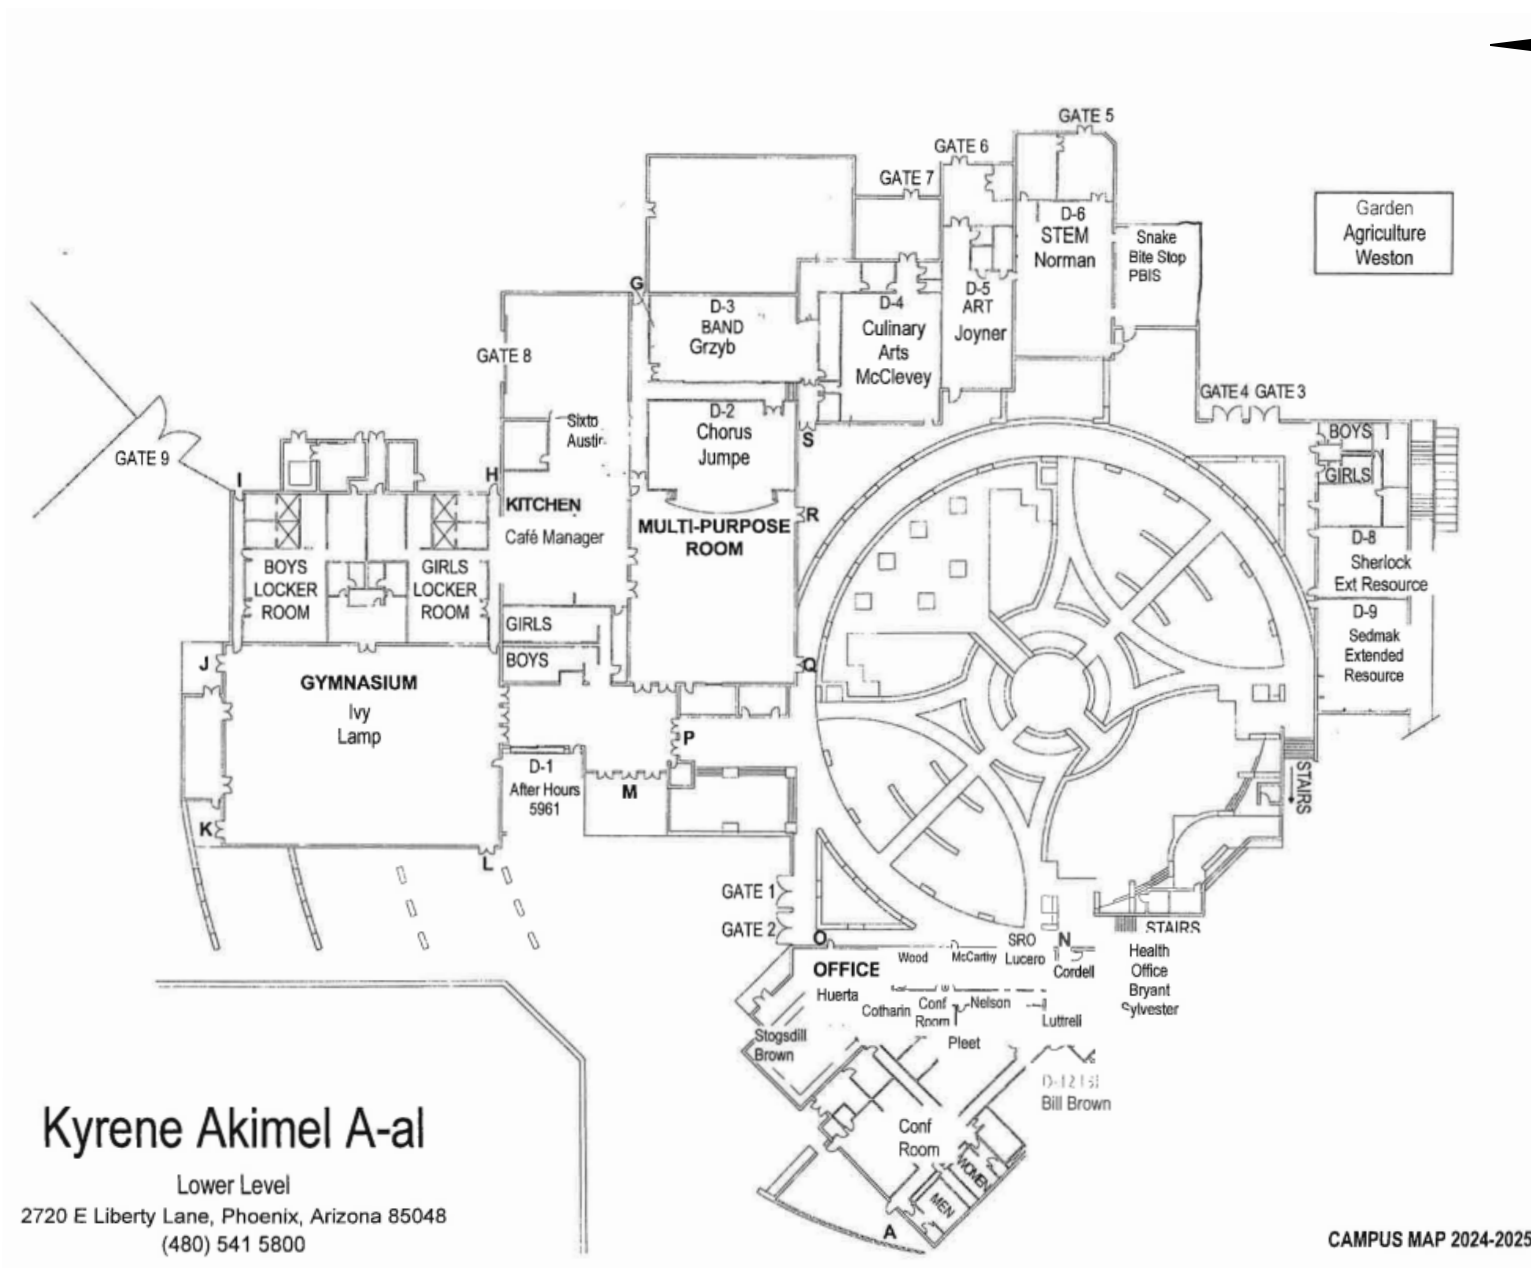

Kyrene Akimel A-al

Lower Level

2720 E Liberty Lane, Phoenix, Arizona 85048
(480) 541 5800



CAMPUS MAP 2024-2025

Site Plan (1)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Lower Level

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

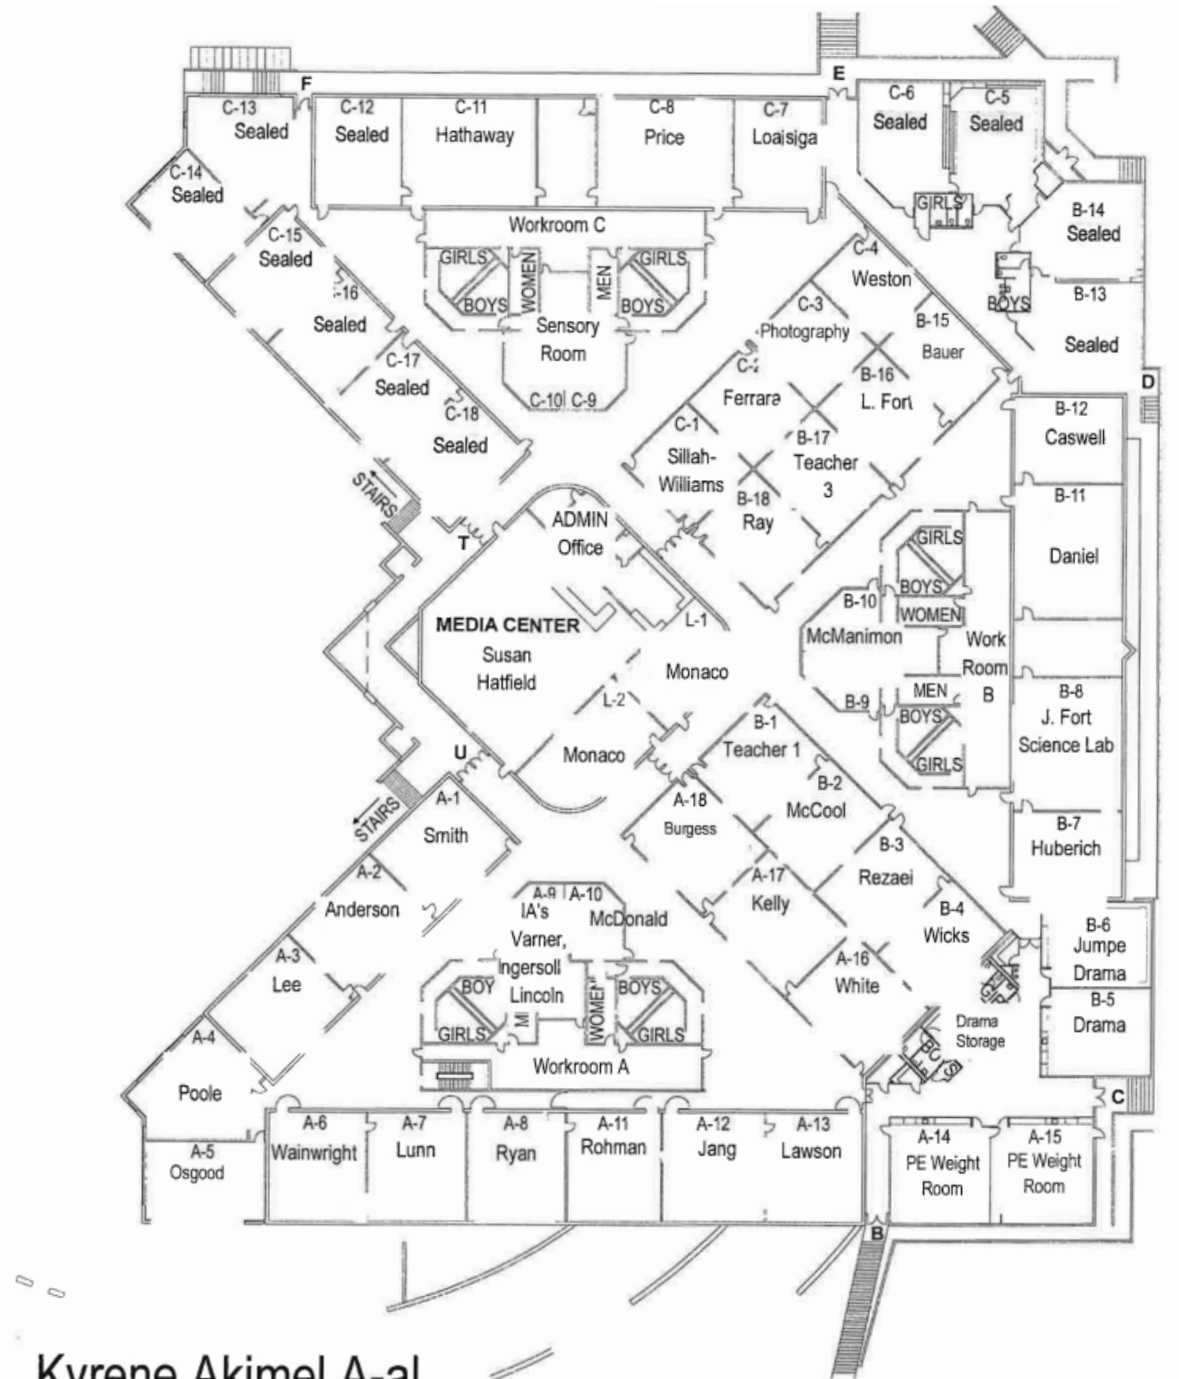

Kyrene Akimel A-al

Upper Level
2720 E Liberty Lane, Phoenix, Arizona 85048
(480) 783-1600



CAMPUS MAP 2024-2025

Site Plan (2)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Second Level

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

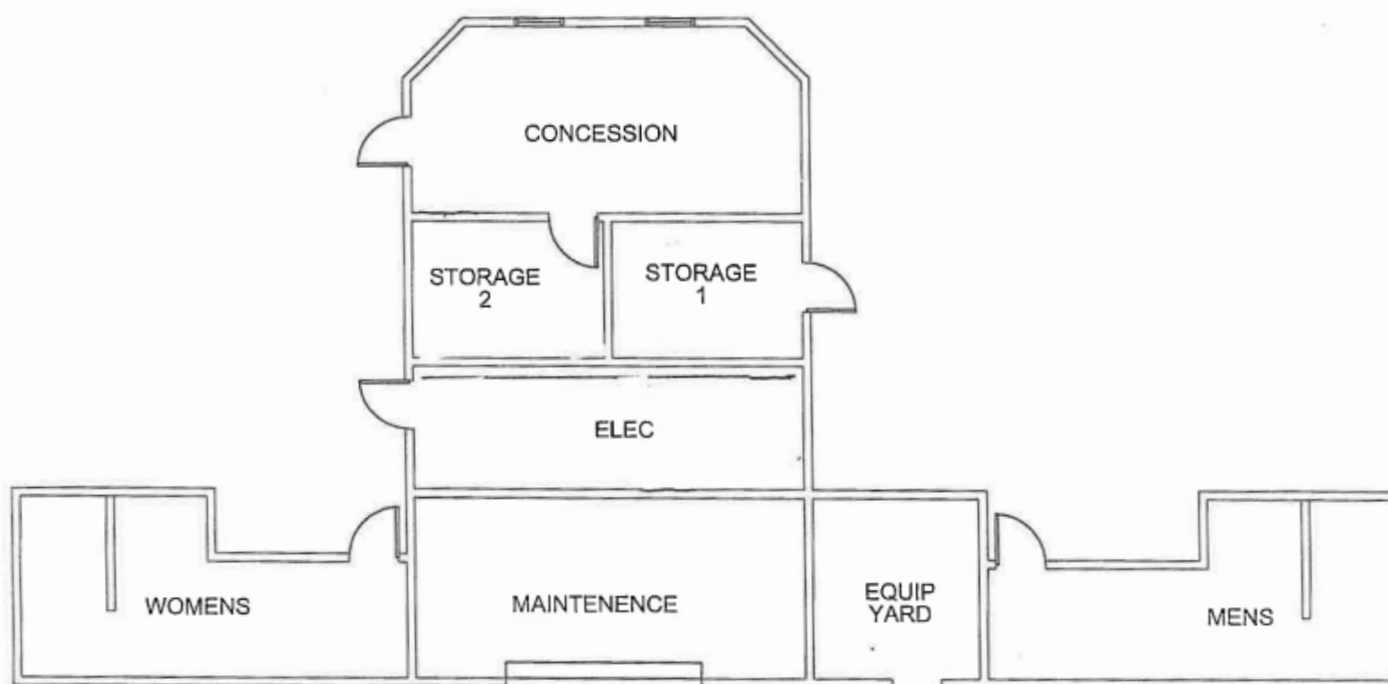

Site Plan (3)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Concession Building

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

SECTION 5



HOMOGENEOUS MATERIALS INVENTORY LISTS

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project #s: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene Elementary School District		
Inspection Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School		
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
Inspection Date: January 15, 2015 - AHERA Building Inspector: Robert H. Duncan (Certification #F 9965)						
1	Orange Peel Texture Drywall System - Paint	Room D1	No	No	M	992
	Texture		No	No	S	
	Tape		No	No	M	
	Joint Compound		No	No	M	
	Drywall with Paper		No	No	M	
2	White Wallpaper	Room D1	No	No	M	992
3	Clear Mastic for White Wallpaper		No	No	M	
4	Blue Cove Base	Room D1	No	No	M	2,220
5	Mastic for Blue Cove Base		No	No	M	
6	2' x 2' Ridged Ceiling Tile	Lobby & Cafeteria	No	No	M	5,250
7	Kitchen Orange Peel Texture Drywall System - Paint	Kitchen & Kitchen Office	No	No	M	977
	Texture		No	No	S	
	Tape		No	No	M	
	Joint Compound		No	No	M	
	Drywall with Paper		No	No	M	
8	White 12" x 12" Floor Tile	Kitchen Office	No	No	M	96
9	Black Mastic for White 12" x 12" Floor Tile		No	No	M	
10	Brown 12" x 12" Floor Tile	Kitchen Office	No	No	M	96
11	Black Mastic for Brown 12" x 12" Floor Tile		No	No	M	
12	Tan Fiberglass Reinforced Plastic (FRP)	Kitchen Office	No	No	M	96
13	Mastic for Tan Fiberglass Reinforced Plastic (FRP)		No	No	M	
14	White 4" x 6" Ceramic Cove Base Tile	Kitchen Office	No	No	M	96
15	Grout for White 4" x 6" Ceramic Cove Base Tile		No	No	M	10
16	Mastic for White 4" x 6" Ceramic Cove Base Tile		No	No	M	96
17	White Fiberglass Reinforced Plastic (FRP)	Kitchen & Kitchen Office	No	No	M	300
18	Beige Mastic for White Fiberglass Reinforced Plastic (FRP)		No	No	M	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project #s: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene Elementary School District		
Inspection Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School		
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
Inspection Date: June 8, 2017 - AHERA Building Inspector: Krista Wahnefried (Certification #25511-2447693-311078)						
19	White 4" x 4" Ceramic Wall Tile	Restrooms	No	No	M	50
20	White Grout for White 4" x 4" Ceramic Wall Tile		No	No	M	5
21	Cream Mastic for White 4" x 4" Ceramic Wall Tile		No	No	M	50
22	Orange Peel Texture Drywall System - Paint	Restrooms & Janitor's Closet	No	No	M	150
	Texture		No	No	S	
	Tape		No	No	M	
	Joint Compound		No	No	M	
	Drywall with Paper		No	No	M	
23	White 12" x 12" Floor Tile	Restrooms & Janitor's Closet	No	No	M	150
24	Yellow Mastic for White 12" x 12" Floor Tile		No	No	M	
25	White Mop Sink Caulking	Janitor's Closet	No	No	M	2
26	Tan Back Splash Mastic	Restrooms	No	No	M	30
27	Blue Cove Base	Restrooms	No	No	M	50
28	Tan Mastic for Blue Cove Base		No	No	M	
29	Orange Peel Texture Drywall System - Paint	Admin - Custodian	No	No	M	150
	Texture		No	No	S	
	Tape		No	No	M	
	Joint Compound		No	No	M	
	Drywall with Paper		No	No	M	
30	White Fiberglass Reinforced Plastic (FRP)	Admin - Custodian - Mop Sink	No	No	M	5
31	Tan Mastic for White Fiberglass Reinforced Plastic (FRP)		No	No	M	
32	Tan Metal Back Splash Mastic	Admin - Custodian - Mop Sink	No	No	M	3
33	Blue Cove Base	Admin - Custodian	No	No	M	15
34	Tan Mastic for Blue Cove Base		No	No	M	
35	White Mop Sink Caulking	Admin - Custodian - Mop Sink	No	No	M	2

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Main Building - Page 2

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project #s: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene Elementary School District		
Inspection Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School		
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
36	Orange Peel Texture Drywall System - Paint	Art Room D5	No	No	M	550
	Texture		No	No	S	
	Tape		No	No	M	
	Joint Compound		No	No	M	
	Drywall with Paper		No	No	M	
37	Fiberglass Reinforced Plastic (FRP)	Art Room D5	No	No	M	150
38	Yellow Mastic for Fiberglass Reinforced Plastic (FRP)		No	No	M	
39	Blue Cove Base	Art Room D5	No	No	M	550
40	White Mastic for Blue Cove Base		No	No	M	
41	2' x 2' Ceiling Tile	Art Room D5	No	No	M	550
42	White 6" x 6" Ceramic Cove Base	D10 Men's Restroom	No	No	M	290
43	White Grout for White 6" x 6" Ceramic Cove Base		No	No	M	29
44	Cream Mastic for White 6" x 6" Ceramic Cove Base		No	No	M	290
45	Orange Peel Texture Drywall System - Paint	D10 Men's Restroom	No	No	M	290
	Texture		No	No	S	
	Tape		No	No	M	
	Joint Compound		No	No	M	
	Drywall with Paper		No	No	M	
46	White Restroom Fixture Caulking	D10 Men's Restroom	No	No	M	2
47	Orange Peel Texture Drywall System - Paint	Gym Storage & Janitor's Closet	No	No	M	500
	Texture		No	No	S	
	Tape		No	No	M	
	Joint Compound		No	No	M	
	Drywall with Paper		No	No	M	
48	White Mop Sink Caulking	Gym Storage/Janitor's Closet	No	No	M	2
49	Blue Cove Base	Gym Storage/Janitor's Closet	No	No	M	500
50	Tan Mastic for Blue Cove Base		No	No	M	
51	Metal Back Splash Mastic	Gym Storage/Janitor's Closet	No	No	M	20

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project #s: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53			Client: Kyrene Elementary School District			
Inspection Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25			Site: Kyrene Akimel A-al Middle School			
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
52	Orange Peel Drywall Patch System - Paint	Gym Storage/Janitor's Closet	No	No	M	500
	Texture		No	No	S	
	Tape		No	No	M	
	Joint Compound		No	No	M	
	Drywall with Paper		No	No	M	
Inspection Date: June 7, 2021 - AHERA Building Inspector: Xin Lou (Certification #4644-548-091520)						
53	2" x 4" Beige Ceramic Wall Tile	Kitchen	No	No	M	2,800
54	Mastic for 2" x 4" Beige Ceramic Wall Tile		No	No	M	
55	Grout	Kitchen	No	No	M	280
56	Unfinished Drywall - Brown/Tan	Kitchen	No	No	M	250
57	Fiberglass Reinforced Plastic (FRP)	Kitchen	No	No	M	250
58	Tan Mastic for Fiberglass Reinforced Plastic (FRP)		No	No	M	
Inspection Date: July 20, 2022 - AHERA Building Inspector: Nicholas Marcos (Certification #4644-8873-032422)						
59	New 2' x 2' Ceiling Tile	Storage	No	No	M	35
60	Old 2' x 2' Ceiling Tile	Storage	No	No	M	15
61	Orange Peel Texture Drywall System - Paint	Storage, Custodial, & Men's Coach Office	No	No	M	1,576
	Texture		No	No	S	
	Tape		No	No	M	
	Joint Compound		No	No	M	
	Drywall with Paper		No	No	M	
62	Counter Caulking	Men's & Girl's Coach Office	No	No	M	2
63	Fiberglass Reinforced Plastic (FRP)	Custodial & Men's Coach Office	No	No	M	15
64	Tan Mastic for Fiberglass Reinforced Plastic (FRP)		No	No	M	
65	Restroom Greenboard - Paint	Men's & Girl's Coach Office	No	No	M	1,176
	Texture		No	No	S	
	Drywall		No	No	M	
66	Blue Cove Baseboard	Custodial & Men's & Girl's Coach Office	No	No	M	1,376
67	Yellow Mastic for Blue Cove Baseboard		No	No	M	
68	Fixture Caulking	Men's & Girl's Coach Office	No	No	M	3

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project #s: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53			Client: Kyrene Elementary School District			
Inspection Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25			Site: Kyrene Akimel A-al Middle School			
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
69	Mop Sink Caulking	Custodial	No	No	M	2
70	Door Frame Caulking	Men's & Girl's Coach Office	No	No	M	3
71	White 4" x 8" Ceramic Tile	Girl's Coach Office	No	No	M	294
72	Mastic for White 4" x 8" Ceramic Tile		No	No	M	294
73	Grout for White 4" x 8" Ceramic Tile		No	No	M	29
74	White 4" x 4" Ceramic Tile	Girl's Coach Office	No	No	M	294
75	Grout for White 4" x 4" Ceramic Tile		No	No	M	29
76	Concrete for White 4" x 4" Ceramic Tile		No	No	M	294
77	Pink Insulation	Storage	No	Yes	TSI	15
78	Brown Paper and Silver Foil Backing for Pink Insulation		No	No	M	15
Inspection Date: May 16, 2023 - AHERA Building Inspector: Xin Lou (Certification #4644-548-092022)						
79	Orange Peel Texture Drywall System - White Paint	Room D9	No	No	M	550
	Texture		No	No	S	
	Tape		No	No	M	
	Joint Compound		No	No	M	
	Drywall with Paper		No	No	M	
80	Blue Cove Base	Room D9	No	No	M	550
81	Cream Mastic for Blue Cove Base		No	No	M	
82	White Cabinet Caulking	Room D9	No	No	M	2
83	White Sink Caulking	D9 Restroom	No	No	M	1
84	4" x 4" Off-White Ceramic Wall Tile	Shower	No	No	M	250
85	Cream Mastic for 4" x 4" Off-White Ceramic Wall Tile		No	No	M	
86	White Grout	Shower	No	No	M	50
87	White 12" x 12" Beige Vinyl Floor Tile	Room D9 & Storage	No	No	M	650
Inspection Date: March 11, 2024 - AHERA Building Inspector: Tracey Carpenter (Certification #4644-14588-090523)						
88	12" x 12" Tan Vinyl Floor Tile	Gymnasium Building - Halls	No	No	M	1,450
89	Black/Yellow Mastic for 12" x 12" Tan Vinyl Floor Tile		No	No	M	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project #s: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene Elementary School District		
Inspection Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School		
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
Inspection Date: February 11, 2025 - AHERA Building Inspector: Isai Portillo (Certification #188748-19438-121224)						
90	12" x 12" White/Gray Specs Vinyl Floor Tile (VCT)	Gym - Classrooms, Halls, Storage, & Miscellaneous Rooms	No	No	M	2,500
91	Black Mastic for 12" x 12" White/Gray Specs VCT		No	No	M	
92	White w/ Black Specs 12" x 12" Vinyl Floor Tile (VCT)	Gym - Classrooms, Halls, Storage, & Miscellaneous Rooms	No	No	M	2,500
93	Yellow Mastic for White w/ Black Specs 12" x 12" VCT		No	No	M	
94	Black w/ White Specs 12" x 12" Vinyl Floor Tile (VCT)	Gym - Classrooms, Halls, Storage, & Miscellaneous Rooms	No	No	M	2,500
95	Yellow Mastic for Black w/ White Specs 12" x 12" VCT		No	No	M	
96	White 2" x 2" Ceiling Tile	Gym - Throughout	No	No	M	5,250
97	Gray/Blue Square Carpet	Gym - Classrooms	No	No	M	3,300
98	Green Mastic for Gray/Blue Square Carpet		No	No	M	
99	Orange Peel Texture Drywall System - Paint	Section D8 to D9 - Throughout	No	No	M	5,250
	White Texture		No	No	S	
	White Joint Compound with Paint		No	No	M	
	Yellow Tape (Mesh)		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
100	12" x 12" White w/Gray Specs Vinyl Floor Tile (VCT)	Section D8 to D9 - Classrooms	No	No	M	1,450
101	Black Mastic for 12" x 12" White w/Gray Specs		No	No	M	
102	Gray/Blue Square Carpet	Section D8 to D9 - Classrooms	No	No	M	1,600
103	Tan Mastic for Gray/Blue Square Carpet		No	No	M	
104	Blue Cove Base	Section D8 to D9 - Throughout	No	No	M	380
105	Tan Mastic for Blue Cove Base		No	No	M	
106	White 2' x 2' Ceiling Tile	Section D8 to D9 - Throughout	No	No	M	2,200
107	White 2" x 2" Ceiling Tile	Offices	No	No	M	2,200
108	Gray/Blue Square Carpet	Offices	No	No	M	1,600
109	Beige Mastic for Gray/Blue Square Carpet		No	No	M	
110	Blue 4" Cove Base	Offices	No	No	M	380
111	Cream Mastic for Blue 4" Cove Base		No	No	M	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project #s: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene Elementary School District		
Inspection Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School		
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
112	Wallpaper Drywall System - Beige	Offices	No	No	S	1,100
	White Compound		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
113	Untextured Drywall System	Main Office Hallways and Throughout D8 and D9	No	No	M	1,400
	White Compound		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
114	Orange Peel Texture Drywall - White Paint	Second Level - Throughout	No	No	M	5,500
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
115	White w/Gray Specs 12" x 12" Vinyl Floor Tile (VCT)	Second Level - Classrooms & Storage	No	No	M	1,500
116	Brown/Black Mastic for White w/Gray Specs 12" x 12" VCT		No	No	M	
117	Gray Fireproofing	Second Level - Throughout	No	Yes	TSI	350
118	Gray/Blue Square Carpet	Second Level - Classrooms	No	No	M	1,600
119	Yellow Mastic for Gray/Blue Square Carpet		No	No	M	
120	White 2" x 2" Ceiling Tile	Second Level - Throughout	No	No	M	5,500
Assumed ACBM						
121	Brown 16" x 8" CMU	Gym, Gym Lobby, and Classrooms	Assumed	No	M	6,000
122	Mortar for Brown 16" x 8" CMU		Assumed	No	M	
123	Brown 16" x 3" CMU	Gym, Gym Lobby, and Classrooms	Assumed	No	M	6,000
124	Mortar for Brown 16" x 3" CMU		Assumed	No	M	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Main Building - Page 7

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project #s: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene Elementary School District		
Inspection Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School		
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
125	Brown 16" x 3" Decorative CMU	Gym, Gym Lobby, and Classrooms	Assumed	No	M	600
126	Mortar for Brown 16" x 3" Decorative CMU		Assumed	No	M	
127	Clear 6" x 6" Block Grout	Gym Lobby	Assumed	No	M	150
128	Brown Door Sealant	Gym & Gym Lobby	Assumed	No	M	330
129	Floor Expansion Joint	Throughout	Assumed	No	M	10,000
130	Off-White 12" x 12" Ceramic Floor Tile	Gym Lobby, Snack Bar, & Kitchen	Assumed	No	M	2,200
131	Grout for Off-White 12" x 12" Ceramic Floor Tile		Assumed	No	M	220
132	Blue 12" x 12" Ceramic Floor Tile	Gym Lobby, Snack Bar, & Kitchen	Assumed	No	M	800
133	Grout for Blue 12" x 12" Ceramic Floor Tile		Assumed	No	M	80
134	Fixture Caulking	Restrooms	Assumed	No	M	5
135	Off-White 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	1,800
136	Grout for Off-White 2" x 2" Ceramic Floor Tile		Assumed	No	M	180
137	Tan 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	1,800
138	Grout for Tan 2" x 2" Ceramic Floor Tile		Assumed	No	M	180
139	Tan 1' x 1' Ceramic Floor Tile	Restrooms	Assumed	No	M	1,800
140	Grout for Tan 1' x 1' Ceramic Floor Tile		Assumed	No	M	180
141	White 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	1,800
142	Grout for White 4" x 4" Ceramic Wall Tile		Assumed	No	M	180
143	White 4" x 4" Ceramic Cove Base Tile	Restrooms	Assumed	No	M	1,800
144	Grout for White 4" x 4" Ceramic Cove Base Tile		Assumed	No	M	180
145	Black 2" x 2" Ceramic Wall Tile	Restrooms	Assumed	No	M	1,800
146	Grout for Black 4" x 4" Ceramic Wall Tile		Assumed	No	M	180

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project #s: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene Elementary School District		
Inspection Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School		
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
147	Beige 2" x 2" Ceramic Wall Tile	Restrooms	Assumed	No	M	1,800
148	Grout for Beige 2" x 2" Ceramic Wall Tile		Assumed	No	M	180
149	Tac Board Wrap	Classrooms Throughout	Assumed	No	M	10,000
150	Mastic for Tac Board Wrap		Assumed	No	M	
151	Light Brown w/Black Specs 12" x 12" Vinyl Floor Tile (VCT)	Kitchen, Men's Coach Office, and Restrooms	Assumed	No	M	2,000
152	Mastic for Light Brown w/ Black Specs 12" x 12" VCT		Assumed	No	M	
153	Blue w/Black Specs 12" x 12" Vinyl Floor Tile (VCT)	Classrooms D1 to D5	Assumed	No	M	2,750
154	Mastic for Blue w/Black Specs 12" x 12"		Assumed	No	M	
155	Tan w/Beige Specs 12" x 12" Vinyl Floor Tile (VCT)	Classrooms D1 to D5	Assumed	No	M	2,750
156	Mastic for Tan w/Beige Specs 12" x 12"		Assumed	No	M	
157	Black Sink Coating	Classrooms and Band Room	Assumed	No	M	8
158	2' x 2' Replacement Ceiling Tile	Gym - Throughout	Assumed	No	M	5,250
159	Black L-Shaped Cove Base	Basketball Court	Assumed	No	M	370
160	Mastic for Black L-Shaped Cove Base		Assumed	No	M	
161	White Flex Connect Damper	Gym Storage	Assumed	No	M	20
162	Brown 4" x 4" Ceramic Wall Tile	Gym	Assumed	No	M	50
163	Grout for Brown 4" x 4" Ceramic Wall Tile		Assumed	No	M	5
164	White Paneling	Boy's Locker Room Hallway	Assumed	No	M	525
165	Mastic for White Paneling		Assumed	No	M	525
166	Gray 12" x 12" Texture Ceramic Tile	Locker Rooms	Assumed	No	M	5,250
167	Grout for Gray 12" x 12" Texture Ceramic Tile		Assumed	No	M	525
168	White Smooth 2' x 2' Ceiling Tile	Snack Bar & Room D4	Assumed	Yes	M	250
169	Tan Smooth 2' x 2' Ceiling Tile	Snack Bar & Room D4	Assumed	Yes	M	10
170	Silver Caulking	Snack Bar	Assumed	No	M	30

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project #s: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene Elementary School District		
Inspection Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School		
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
171	White Smooth 2' x 4' Ceiling Tile	Kitchen	Assumed	Yes	M	1,900
172	Beige 12" x 12" Ceramic Floor Tile	Kitchen	Assumed	No	M	25
173	Grout for Beige 12" x 12" Ceramic Floor Tile		Assumed	No	M	2
174	Black/White Texture 12" x 12" Ceramic Floor Tile	Kitchen	Assumed	No	M	3
175	Grout for Black/White Texture 12" x 12" Ceramic Floor Tile		Assumed	No	M	3
176	Off-White 6" x 4" Ceramic Cove Base	Kitchen	Assumed	No	M	34
177	Grout for Off-White 6" x 4" Ceramic Cove Base		Assumed	No	M	3
178	Black/White Specs 12" x 12" Vinyl Floor Tile (VCT)	Stage	Assumed	No	M	2,100
179	Mastic for Black/White Specs 12" x 12" VCT		Assumed	No	M	21
180	Blue 54" x 12" Vinyl w/ Circle Pattern	Stage Stairs	Assumed	No	M	50
181	Mastic for Blue 54" x 12" Vinyl w/ Circle Pattern		Assumed	No	M	50
182	Black/Gray Sink Coating	Stage, Workroom, and Rooms D8/D9	Assumed	No	M	5
183	2' x 4' Ceiling Tile w/ Pin Holes	Band Room	Assumed	Yes	M	550
184	Counter Caulking	Classrooms	Assumed	No	M	210
185	Cabinet Caulking	Classrooms	Assumed	No	M	210
186	Interior Frame Caulking	Throughout	Assumed	No	M	330
187	Concrete Foundation	Throughout	Assumed	No	M	40,500
188	Gray 2" x 2" Ceramic Floor Tile	Room D4	Assumed	No	M	40
189	Grout for Gray 2" x 2" Ceramic Floor Tile		Assumed	No	M	4
190	New White Fiberglass Reinforced Plastic (FRP)	D4 Restroom	Assumed	No	M	224
191	Mastic for New White Fiberglass Reinforced Plastic		Assumed	No	M	22

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project #s: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene Elementary School District		
Inspection Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School		
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
192	White w/Black Specs 12" x 12" Vinyl Floor Tile (VCT)	Multi-Purpose Restrooms & Room D5	Assumed	No	M	4,800
193	Mastic for White w/Black Specs 12" x 12" VCT		Assumed	No	M	
194	White Ceiling Wrap	Room D6	Assumed	No	M	2,400
195	Insulation for White Ceiling Wrap		Assumed	Yes	TSI	
196	White Pipe Wrap	Room D6	Assumed	No	M	2,400
197	Insulation for White Pipe Wrap		Assumed	Yes	TSI	
198	Ceiling Plaster	Locker Rooms	Assumed	No	M	5,000
199	Silver Ceiling Wrap	Above Plenum Throughout Building	Assumed	No	M	5,000
200	Insulation for Silver Ceiling Wrap		Assumed	Yes	TSI	
201	Red Fire Stop Caulking	Above Plenum Throughout Building	Assumed	No	M	250
202	Silver Flex Duct Wrap	Above Plenum Throughout Building	Assumed	No	M	5,000
203	Insulation for Silver Flex Duct Wrap		Assumed	Yes	TSI	
204	Untextured Drywall System	Above Plenum Throughout Building	Assumed	No	M	5,000
205	Blue 4" x 4" Ceramic Cove Base Tile	Restrooms	Assumed	No	M	120
206	Grout for Blue 4" x 4" Ceramic Cove Base Tile		Assumed	No	M	12
207	Fiberglass Reinforced Plastic (FRP)	Custodial Room	Assumed	No	M	40
208	Mastic for Fiberglass Reinforced Plastic (FRP)		Assumed	No	M	
209	Mop Sink Caulking	Custodial Room	Assumed	No	M	5
210	White 6" x 6" Ceramic Cove Base	Room D9 - Shower & Restroom	Assumed	No	M	140
211	Grout for White 6" x 6" Ceramic Cove Base		Assumed	No	M	4
212	Black Window Sealant	D8 to D9 - Throughout	Assumed	No	M	30
213	Gray Duct Mastic	Above Plenum Throughout Building	Assumed	No	M	5,000

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project #: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene Elementary School District		
Inspection Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School		
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
214	Silver Duct Wrap	Above Plenum Throughout Building	Assumed	No	M	5,000
215	Insulation for Silver Duct Wrap		Assumed	Yes	TSI	
216	White Duct Mastic	Above Plenum Throughout Building	Assumed	No	M	5,000
217	Black 2' x 2' Carpet	Main Office	Assumed	No	M	6,180
218	Mastic for Black 2' x 2' Carpet		Assumed	No	M	
219	9" x 9" Black Grout	Main Office	Assumed	No	M	150
220	Gray Window Sealant	Main Office	Assumed	No	M	30
221	Gray Door Sealant	Main Office	Assumed	No	M	30
222	White w/Gray Specs 12" x 12" Vinyl Floor Tile (VCT)	Main Office	Assumed	No	M	400
223	Mastic for White w/Gray Specs 12" x 12" VCT		Assumed	No	M	
224	Beige Rough Texture Wallpaper	Main Office - Nurse	Assumed	No	M	80
225	Blue 16" x 16" Vinyl Circle Pattern Tile	Main Office	Assumed	No	M	300
226	Mastic for Blue 16" x 16" Vinyl Circle Pattern Tile		Assumed	No	M	
227	Blue 48" x 12" Blue Vinyl Floor Tile (VCT)	Main Office	Assumed	No	M	1,545
228	Mastic for Blue 48" x 12" Blue VCT		Assumed	No	M	
229	Brown 18" x 6" CMU	Main Office	Assumed	No	M	3,090
230	Mortar for Brown 18" x 6" CMU		Assumed	No	M	
231	Black Flex Duct Wrap	Main Office	Assumed	No	M	2,400
232	Insulation for Black Flex Duct Wrap		Assumed	Yes	M	
233	Skip Trowel Texture Drywall System	Second Level - Corner Rooms Near A16 & B4	Assumed	No	M	150
234	Transite Hood Panel	Second Level - Classrooms	Assumed	No	M	5
235	12" x 12" White w/Gray Specs Vinyl Floor Tile (VCT)	Second Level - Classrooms	Assumed	No	M	7,068
236	Mastic for 12" x 12" White w/Gray Specs VCT		Assumed	No	M	
237	Blue 2" x 2" Vinyl Circle Pattern Tile	Second Level - Exit E - B, C, D, & E	Assumed	No	M	40

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project #s: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene Elementary School District		
Inspection Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School		
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
238	Mastic for Blue 2" x 2" Vinyl Circle Pattern Tile	Second Level - Exit E - B, C, D, & E	Assumed	No	M	40

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project #s: AAZ1418.11+AZ1418.53			Client: Kyrene Elementary School District			
Inspection Dates: 3/11/24+2/11/25			Site: Kyrene Akimel A-al Middle School			
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
Inspection Date: March 11, 2024 - AHERA Building Inspector: Tracey Carpenter (Certification #4644-14588-090523)						
1	White Restroom Ceramic Wall Tile	Concession Building - Men's Restroom	No	No	M	350
2	Tan Grout for White Restroom Ceramic Wall Tile		No	No	M	35
3	Cream Mastic for White Restroom Ceramic Wall Tile		No	No	M	350
Inspection Date: February 11, 2025 - AHERA Building Inspector: Isai Portillo (Certification #188748-19438-121224)						
4	Orange Peel Texture Drywall System - White Paint	Concession Building - Throughout	No	No	M	10,000
	White Texture		No	No	S	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
5	Smooth Texture Drywall System - White Paint	Concession Building - Electrical	No	No	M	150
	White Texture		No	No	S	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
6	Blue 4" Cove Base	Concession Building - Throughout	No	No	M	8,000
7	Yellow Mastic for Blue 4" Cove Base		No	No	M	
8	Gray Concrete Foundation	Concession Building - Throughout	No	No	M	10,000
9	Gray Coating for Gray Concrete Foundation		No	No	S	
10	Tan Brick	Concession Building - Electrical	No	No	M	150
11	Brown Mortar for Tan Brick		No	No	M	
February 11, 2025: Assumed ACBM						
12	Tan 2" x 2" Ceramic Floor Tile	Restrooms	No	No	M	700
13	Grout for Tan 2" x 2" Ceramic Floor Tile		No	No	M	70

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project #s: AAZ1418.11+AZ1418.53				Client: Kyrene Elementary School District		
Inspection Dates: 3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School		
Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
14	Tan w/White Specs 2" x 2" Ceramic Floor Tile	Restrooms	No	No	M	700
15	Grout for Tan w/White Specs 2" x 2" Ceramic Floor Tile		No	No	M	70
16	Tan w/White Specs 1" x 2" Ceramic Floor Tile	Restrooms	No	No	M	700
17	Grout for Tan w/White Specs 1" x 2" Ceramic Floor Tile		No	No	M	70
18	White 4" x 4" Ceramic Cove Base Tile	Restrooms	No	No	M	350
19	Grout for White 4" x 4" Ceramic Cove Base Tile		No	No	M	35
20	Black 2" x 2" Ceramic Wall Tile	Restrooms	No	No	M	700
21	Grout for Black 2" x 2" Ceramic Wall Tile		No	No	M	70
22	Beige 2" x 2" Ceramic Wall Tile	Restrooms	No	No	M	700
23	Grout for Beige 2" x 2" Ceramic Wall Tile		No	No	M	70
24	Counter Caulking	Concession Room	No	No	M	2
25	Interior Frame Caulking	Throughout	No	No	M	3
26	Brown 16" x 8" CMU	Maintenance & Storage	No	No	M	180
27	Mortar for Brown 16" x 8" CMU		No	No	M	
28	Brown 16" x 4" CMU	Maintenance & Storage	No	No	M	
29	Mortar for Brown 16" x 4" CMU		No	No	M	
30	Fixture Caulking	Restrooms	No	No	M	2

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

SECTION 6



PLM BULK SAMPLE SHEETS

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: January 15, 2015 - AHERA Building Inspector: Robert H. Duncan (Certification #F 9965)					
AZ0959.856-PLM-1	1	Orange Peel Texture Drywall System - Paint	Room D1 - Southwest Corner	Convenient	None Detected
		Texture		Convenient	None Detected
		Tape		Convenient	None Detected
		Joint Compound		Convenient	None Detected
		Drywall with Paper		Convenient	None Detected
AZ0959.856-PLM-2	1	Orange Peel Texture Drywall System - Paint	Room D1 - Southwest Corner	Convenient	None Detected
		Texture		Convenient	None Detected
		Tape		Convenient	None Detected
		Joint Compound		Convenient	None Detected
		Drywall with Paper		Convenient	None Detected
AZ0959.856-PLM-3	1	Orange Peel Texture Drywall System - Paint	Room D1 - Southwest Corner	Convenient	None Detected
		Texture		Convenient	None Detected
		Tape		Convenient	None Detected
		Joint Compound		Convenient	None Detected
		Drywall with Paper		Convenient	None Detected
AZ0959.856-PLM-4	2	White Wallpaper	Room D1 - Southwest	Convenient	None Detected
	3	Clear Mastic for White Wallpaper		Convenient	None Detected
AZ0959.856-PLM-5	2	White Wallpaper	Room D1 - Southwest	Convenient	None Detected
	3	Clear Mastic for White Wallpaper		Convenient	None Detected
AZ0959.856-PLM-6	2	White Wallpaper	Room D1 - Southwest	Convenient	None Detected
	3	Clear Mastic for White Wallpaper		Convenient	None Detected
AZ0959.856-PLM-7	4	Blue Cove Base	Room D1 - Southwest	Convenient	None Detected
	5	Mastic for Blue Cove Base		Convenient	None Detected
AZ0959.856-PLM-8	4	Blue Cove Base	Room D1 - Southwest	Convenient	None Detected
	5	Mastic for Blue Cove Base		Convenient	None Detected
AZ0959.856-PLM-9	4	Blue Cove Base	Room D1 - Southwest	Convenient	None Detected
	5	Mastic for Blue Cove Base		Convenient	None Detected

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ0959.856-PLM-10	6	2' x 2' Ridged Ceiling Tile	Lobby - Northeast	Convenient	None Detected	
AZ0959.856-PLM-11		2' x 2' Ridged Ceiling Tile	Lobby - North	Convenient	None Detected	
AZ0959.856-PLM-12		2' x 2' Ridged Ceiling Tile	Cafeteria - Northeast	Convenient	None Detected	
AZ0959.856-PLM-13	7	Kitchen Orange Peel Texture Drywall System - Paint	Kitchen - West	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	
AZ0959.856-PLM-14	7	Kitchen Orange Peel Texture Drywall System - Paint	Kitchen Office - Northeast Corner	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	
AZ0959.856-PLM-15	7	Kitchen Orange Peel Texture Drywall System - Paint	Kitchen Office - Southwest Corner	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	
AZ0959.856-PLM-16	8	White 12" x 12" Floor Tile	Kitchen Office - Northwest	Convenient	None Detected	
	9	Black Mastic for White 12" x 12" Floor Tile		Convenient	None Detected	
AZ0959.856-PLM-17	8	White 12" x 12" Floor Tile	Kitchen Office - West	Convenient	None Detected	
	9	Black Mastic for White 12" x 12" Floor Tile		Convenient	None Detected	
AZ0959.856-PLM-18	8	White 12" x 12" Floor Tile	Kitchen Office - Southwest	Convenient	None Detected	
	9	Black Mastic for White 12" x 12" Floor Tile		Convenient	None Detected	
AZ0959.856-PLM-19	10	Brown 12" x 12" Floor Tile	Kitchen Office - Northwest	Convenient	None Detected	
	11	Black Mastic for Brown 12" x 12" Floor Tile		Convenient	None Detected	
AZ0959.856-PLM-20	10	Brown 12" x 12" Floor Tile	Kitchen Office - Center	Convenient	None Detected	
	11	Black Mastic for Brown 12" x 12" Floor Tile		Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ0959.856-PLM-21	10	Brown 12" x 12" Floor Tile	Kitchen Office - North	Convenient	None Detected	
	11	Black Mastic for Brown 12" x 12" Floor Tile		Convenient	None Detected	
AZ0959.856-PLM-22	12	Tan Fiberglass Reinforced Plastic (FRP)	Kitchen Office - Northwest	Convenient	None Detected	
	13	Mastic for Tan Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected	
AZ0959.856-PLM-23	12	Tan Fiberglass Reinforced Plastic (FRP)	Kitchen Office - Northeast	Convenient	None Detected	
	13	Mastic for Tan Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected	
AZ0959.856-PLM-24	12	Tan Fiberglass Reinforced Plastic (FRP)	Kitchen Office - North	Convenient	None Detected	
	13	Mastic for Tan Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected	
AZ0959.856-PLM-25	14	White 4" x 6" Ceramic Cove Base Tile	Kitchen Office - Northwest Corner	Convenient	None Detected	
	15	Grout for White 4" x 6" Ceramic Cove Base Tile		Convenient	None Detected	
	16	Mastic for White 4" x 6" Ceramic Cove Base Tile		Convenient	None Detected	
AZ0959.856-PLM-26	14	White 4" x 6" Ceramic Cove Base Tile	Kitchen Office - Northwest	Convenient	None Detected	
	15	Grout for White 4" x 6" Ceramic Cove Base Tile		Convenient	None Detected	
	16	Mastic for White 4" x 6" Ceramic Cove Base Tile		Convenient	None Detected	
AZ0959.856-PLM-27	14	White 4" x 6" Ceramic Cove Base Tile	Kitchen Office - Northeast	Convenient	None Detected	
	15	Grout for White 4" x 6" Ceramic Cove Base Tile		Convenient	None Detected	
	16	Mastic for White 4" x 6" Ceramic Cove Base Tile		Convenient	None Detected	
AZ0959.856-PLM-28	17	White Fiberglass Reinforced Plastic (FRP)	Kitchen Office - Northeast Corner	Convenient	None Detected	
	18	Beige Mastic for White Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected	
AZ0959.856-PLM-29	17	White Fiberglass Reinforced Plastic (FRP)	Kitchen Office - Northeast Corner	Convenient	None Detected	
	18	Beige Mastic for White Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected	
AZ0959.856-PLM-30	17	White Fiberglass Reinforced Plastic (FRP)	Kitchen - West	Convenient	None Detected	
	18	Beige Mastic for White Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: June 8, 2017 - AHERA Building Inspector: Krista Wahnefried (Certification #25511-2447693-311078)					
AZ1418.05-PLM-31	19	White 4" x 4" Ceramic Wall Tile	Restroom Near A10 - Entry - South	Convenient	None Detected
	20	White Grout for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
	21	Cream Mastic for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ1418.05-PLM-32	19	White 4" x 4" Ceramic Wall Tile	Boy's Restroom Near B10 - Entry - East	Convenient	None Detected
	20	White Grout for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
	21	Cream Mastic for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ1418.05-PLM-33	19	White 4" x 4" Ceramic Wall Tile	Boy's Restroom Near B10 - Entry - West	Convenient	None Detected
	20	White Grout for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
	21	Cream Mastic for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ1418.05-PLM-34	22	Orange Peel Texture Drywall System - Paint	Boy's Restroom Near A9 - Northwest Corner	Convenient	None Detected
		Texture		Convenient	None Detected
		Tape		Convenient	None Detected
		Joint Compound		Convenient	None Detected
		Drywall with Paper		Convenient	None Detected
AZ1418.05-PLM-35	22	Orange Peel Texture Drywall System - Paint	Boy's Restroom Near A9 -Southeast Corner	Convenient	None Detected
		Texture		Convenient	None Detected
		Tape		Convenient	None Detected
		Joint Compound		Convenient	None Detected
		Drywall with Paper		Convenient	None Detected
AZ1418.05-PLM-36	22	Orange Peel Texture Drywall System - Paint	Janitor's Closet - Northeast Corner	Convenient	None Detected
		Texture		Convenient	None Detected
		Tape		Convenient	None Detected
		Joint Compound		Convenient	None Detected
		Drywall with Paper		Convenient	None Detected
AZ1418.05-PLM-37	23	White 12" x 12" Floor Tile	Boy's Restroom Near A9 - Northwest	Convenient	None Detected
	24	Yellow Mastic for White 12" x 12" Floor Tile		Convenient	None Detected
AZ1418.05-PLM-38	23	White 12" x 12" Floor Tile	Janitor's Closet - Southwest	Convenient	None Detected
	24	Yellow Mastic for White 12" x 12" Floor Tile		Convenient	None Detected
AZ1418.05-PLM-39	23	White 12" x 12" Floor Tile	Janitor's Closet - Southwest	Convenient	None Detected
	24	Yellow Mastic for White 12" x 12" Floor Tile		Convenient	None Detected

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ1418.05-PLM-40	25	White Mop Sink Caulking	Janitor's Closet - Southwest	Convenient	None Detected	
AZ1418.05-PLM-41		White Mop Sink Caulking	Janitor's Closet - West	Convenient	None Detected	
AZ1418.05-PLM-42		White Mop Sink Caulking	Janitor's Closet - Southwest Corner	Convenient	None Detected	
AZ1418.05-PLM-43	26	Tan Back Splash Mastic	Boy's Restroom Near A9 - Northwest	Convenient	None Detected	
AZ1418.05-PLM-44		Tan Back Splash Mastic	Boy's Restroom Near A9 - Northwest	Convenient	None Detected	
AZ1418.05-PLM-45		Tan Back Splash Mastic	Boy's Restroom Near A9 - Northwest	Convenient	None Detected	
AZ1418.05-PLM-46	27	Blue Cove Base	Janitor's Closet - Southeast Corner	Convenient	None Detected	
	28	Tan Mastic for Blue Cove Base		Convenient	None Detected	
AZ1418.05-PLM-47	27	Blue Cove Base	Boy's Restroom Near A9 - Northeast Corner	Convenient	None Detected	
	28	Tan Mastic for Blue Cove Base		Convenient	None Detected	
AZ1418.05-PLM-48	27	Blue Cove Base	Boy's Restroom Near A9 - Southwest Corner	Convenient	None Detected	
	28	Tan Mastic for Blue Cove Base		Convenient	None Detected	
AZ1418.05-PLM-49	29	Orange Peel Texture Drywall System - Paint	Admin - Custodian - Southeast Corner	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	
AZ1418.05-PLM-50	29	Orange Peel Texture Drywall System - Paint	Admin - Custodian - Northwest Corner	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ1418.05-PLM-51	29	Orange Peel Texture Drywall System - Paint	Admin - Custodian - Southeast Corner	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	
AZ1418.05-PLM-52	30	White Fiberglass Reinforced Plastic (FRP)	Admin - Custodian - Mop Sink - Southwest Corner	Convenient	None Detected	
	31	Tan Mastic for White Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected	
AZ1418.05-PLM-53	30	White Fiberglass Reinforced Plastic (FRP)	Admin - Custodian - Mop Sink - Southwest Corner	Convenient	None Detected	
	31	Tan Mastic for White Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected	
AZ1418.05-PLM-54	30	White Fiberglass Reinforced Plastic (FRP)	Admin - Custodian - Mop Sink - South Corner	Convenient	None Detected	
	31	Tan Mastic for White Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected	
AZ1418.05-PLM-55	32	Tan Metal Back Splash Mastic	Admin - Custodian - Mop Sink - Southwest	Convenient	None Detected	
AZ1418.05-PLM-56		Tan Metal Back Splash Mastic	Admin - Custodian - Mop Sink - Southwest	Convenient	None Detected	
AZ1418.05-PLM-57		Tan Metal Back Splash Mastic	Admin - Custodian - Mop Sink - Southwest	Convenient	None Detected	
AZ1418.05-PLM-58	33	Blue Cove Base	Admin - Custodian - Southeast	Convenient	None Detected	
	34	Tan Mastic for Blue Cove Base		Convenient	None Detected	
AZ1418.05-PLM-59	33	Blue Cove Base	Admin - Custodian - Southeast	Convenient	None Detected	
	34	Tan Mastic for Blue Cove Base		Convenient	None Detected	
AZ1418.05-PLM-60	33	Blue Cove Base	Admin - Custodian - Southeast Corner	Convenient	None Detected	
	34	Tan Mastic for Blue Cove Base		Convenient	None Detected	
AZ1418.05-PLM-61	35	White Mop Sink Caulking	Admin - Custodian - Mop Sink - Southwest Corner	Convenient	None Detected	
AZ1418.05-PLM-62		White Mop Sink Caulking	Admin - Custodian - Mop Sink - Southwest Corner	Convenient	None Detected	
AZ1418.05-PLM-63		White Mop Sink Caulking	Admin - Custodian - Mop Sink - South	Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ1418.05-PLM-64	36	Orange Peel Texture Drywall System - Paint	Art Room D5 - Southwest	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	
AZ1418.05-PLM-65	36	Orange Peel Texture Drywall System - Paint	Art Room D5 - West	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	
AZ1418.05-PLM-66	36	Orange Peel Texture Drywall System - Paint	Art Room D5 - Northwest	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	
AZ1418.05-PLM-67	37	Fiberglass Reinforced Plastic (FRP)	Art Room D5 - Southwest	Convenient	None Detected	
	38	Yellow Mastic for Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected	
AZ1418.05-PLM-68	37	Fiberglass Reinforced Plastic (FRP)	Art Room D5 - Northwest	Convenient	None Detected	
	38	Yellow Mastic for Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected	
AZ1418.05-PLM-69	37	Fiberglass Reinforced Plastic (FRP)	Art Room D5 - West	Convenient	None Detected	
	38	Yellow Mastic for Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected	
AZ1418.05-PLM-70	39	Blue Cove Base	Art Room D5 - East	Convenient	None Detected	
	40	White Mastic for Blue Cove Base		Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ1418.05-PLM-71	39	Blue Cove Base	Art Room D5 - East	Convenient	None Detected	
	40	White Mastic for Blue Cove Base		Convenient	None Detected	
AZ1418.05-PLM-72	39	Blue Cove Base	Art Room D5 - East	Convenient	None Detected	
	40	White Mastic for Blue Cove Base		Convenient	None Detected	
AZ1418.05-PLM-73	41	2' x 2' Ceiling Tile	Art Room D5 - Southwest	Convenient	None Detected	
AZ1418.05-PLM-74		2' x 2' Ceiling Tile	Art Room D5 - West	Convenient	None Detected	
AZ1418.05-PLM-75		2' x 2' Ceiling Tile	Art Room D5 - Northwest	Convenient	None Detected	
AZ1418.05-PLM-76	42	White 6" x 6" Ceramic Cove Base	D10 Men's Restroom - Northeast Corner	Convenient	None Detected	
	43	White Grout for White 6" x 6" Ceramic Cove Base		Convenient	None Detected	
	44	Cream Mastic for White 6" x 6" Ceramic Cove Base		Convenient	None Detected	
AZ1418.05-PLM-77	42	White 6" x 6" Ceramic Cove Base	D10 Men's Restroom - Northeast	Convenient	None Detected	
	43	White Grout for White 6" x 6" Ceramic Cove Base		Convenient	None Detected	
	44	Cream Mastic for White 6" x 6" Ceramic Cove Base		Convenient	None Detected	
AZ1418.05-PLM-78	42	White 6" x 6" Ceramic Cove Base	D10 Men's Restroom - North	Convenient	None Detected	
	43	White Grout for White 6" x 6" Ceramic Cove Base		Convenient	None Detected	
	44	Cream Mastic for White 6" x 6" Ceramic Cove Base		Convenient	None Detected	
AZ1418.05-PLM-79	45	Orange Peel Texture Drywall System - Paint	D10 Men's Restroom - Northeast Corner	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ1418.05-PLM-80	45	Orange Peel Texture Drywall System - Paint	D10 Men's Restroom - Northeast	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	
AZ1418.05-PLM-81	45	Orange Peel Texture Drywall System - Paint	D10 Men's Restroom - North	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	
AZ1418.05-PLM-82	46	White Restroom Fixture Caulking	D10 Men's Restroom - Northwest	Convenient	None Detected	
AZ1418.05-PLM-83		White Restroom Fixture Caulking	D10 Men's Restroom - North	Convenient	None Detected	
AZ1418.05-PLM-84		White Restroom Fixture Caulking	D10 Men's Restroom - North	Convenient	None Detected	
AZ1418.05-PLM-85	47	Orange Peel Texture Drywall System - Paint	Gym Storage/Janitor's Closet - North	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	
AZ1418.05-PLM-86	47	Orange Peel Texture Drywall System - Paint	Gym Storage/Janitor's Closet - Northeast Corner	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ1418.05-PLM-87	47	Orange Peel Texture Drywall System - Paint	Gym Storage/Janitor's Closet - Southwest Corner	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	
AZ1418.05-PLM-88	48	White Mop Sink Caulking	Gym Storage/Janitor's Closet - North	Convenient	None Detected	
AZ1418.05-PLM-89		White Mop Sink Caulking	Gym Storage/Janitor's Closet - East	Convenient	None Detected	
AZ1418.05-PLM-90		White Mop Sink Caulking	Gym Storage/Janitor's Closet - North	Convenient	None Detected	
AZ1418.05-PLM-91	49	Blue Cove Base	Gym Storage/Janitor's Closet - North	Convenient	None Detected	
	50	Tan Mastic for Blue Cove Base		Convenient	None Detected	
AZ1418.05-PLM-92	49	Blue Cove Base	Gym Storage/Janitor's Closet - East	Convenient	None Detected	
	50	Tan Mastic for Blue Cove Base		Convenient	None Detected	
AZ1418.05-PLM-93	49	Blue Cove Base	Gym Storage/Janitor's Closet - Southwest Corner	Convenient	None Detected	
	50	Tan Mastic for Blue Cove Base		Convenient	None Detected	
AZ1418.05-PLM-94	51	Metal Back Splash Mastic	Gym Storage/Janitor's Closet - Northeast	Convenient	None Detected	
AZ1418.05-PLM-95		Metal Back Splash Mastic	Gym Storage/Janitor's Closet - Northeast	Convenient	None Detected	
AZ1418.05-PLM-96		Metal Back Splash Mastic	Gym Storage/Janitor's Closet - Northeast	Convenient	None Detected	
AZ1418.05-PLM-97	52	Orange Peel Drywall Patch System - Paint	Gym Storage/Janitor's Closet - Northeast Corner	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.05-PLM-98	52	Orange Peel Drywall Patch System - Paint	Gym Storage/Janitor's Closet - Northeast Corner	Convenient	None Detected
		Texture		Convenient	None Detected
		Tape		Convenient	None Detected
		Joint Compound		Convenient	None Detected
		Drywall with Paper		Convenient	None Detected
AZ1418.05-PLM-99	52	Orange Peel Drywall Patch System - Paint	Gym Storage/Janitor's Closet - Northeast Corner	Convenient	None Detected
		Texture		Convenient	None Detected
		Tape		Convenient	None Detected
		Joint Compound		Convenient	None Detected
		Drywall with Paper		Convenient	None Detected
Sample Date: June 7, 2021 - AHERA Building Inspector: Xin Lou (Certification #4644-548-091520)					
AZ0959.2727-PLM-100	53	2" x 4" Beige Ceramic Wall Tile	Kitchen - South	Convenient	None Detected
	54	Mastic for 2" x 4" Beige Ceramic Wall Tile		Convenient	None Detected
AZ0959.2727-PLM-101	53	2" x 4" Beige Ceramic Wall Tile	Kitchen - South	Convenient	None Detected
	54	Mastic for 2" x 4" Beige Ceramic Wall Tile		Convenient	None Detected
AZ0959.2727-PLM-102	53	2" x 4" Beige Ceramic Wall Tile	Kitchen - South	Convenient	None Detected
	54	Mastic for 2" x 4" Beige Ceramic Wall Tile		Convenient	None Detected
AZ0959.2727-PLM-103	55	Grout	Kitchen - Southwest	Convenient	None Detected
AZ0959.2727-PLM-104		Grout	Kitchen - Southwest	Convenient	None Detected
AZ0959.2727-PLM-105		Grout	Kitchen - Southwest	Convenient	None Detected
AZ0959.2727-PLM-106	56	Unfinished Drywall - Brown/Tan	Kitchen - South	Convenient	None Detected
AZ0959.2727-PLM-107		Unfinished Drywall - Brown/Tan	Kitchen - South	Convenient	None Detected
AZ0959.2727-PLM-108		Unfinished Drywall - Brown/Tan	Kitchen - South	Convenient	None Detected
AZ0959.2727-PLM-109	57	Fiberglass Reinforced Plastic (FRP)	Kitchen - South	Convenient	None Detected
	58	Tan Mastic for Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ0959.2727-PLM-110	57	Fiberglass Reinforced Plastic (FRP)	Kitchen - South	Convenient	None Detected
	58	Tan Mastic for Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected
AZ0959.2727-PLM-111	57	Fiberglass Reinforced Plastic (FRP)	Kitchen - South	Convenient	None Detected
	58	Tan Mastic for Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected
Sample Date: July 20, 2022 - AHERA Building Inspector: Nicholas Marcos (Certification #4644-8873-032422)					
AZ0959.3119-PLM-112	59	New 2' x 2' Ceiling Tile	Storage - Northwest	Convenient	None Detected
AZ0959.3119-PLM-113		New 2' x 2' Ceiling Tile	Storage - East	Convenient	None Detected
AZ0959.3119-PLM-114		New 2' x 2' Ceiling Tile	Storage - Center - South	Convenient	None Detected
AZ0959.3119-PLM-115	60	Old 2' x 2' Ceiling Tile	Storage - Northwest	Convenient	None Detected
AZ0959.3119-PLM-116		Old 2' x 2' Ceiling Tile	Storage - Center - North	Convenient	None Detected
AZ0959.3119-PLM-117		Old 2' x 2' Ceiling Tile	Storage - East	Convenient	None Detected
AZ0959.3119-PLM-118	61	Orange Peel Texture Drywall System - Paint	Men's Coach Office - Northwest Corner	Convenient	None Detected
		Texture		Convenient	None Detected
		Tape		Convenient	None Detected
		Joint Compound		Convenient	None Detected
		Drywall with Paper		Convenient	None Detected
AZ0959.3119-PLM-119	61	Orange Peel Texture Drywall System - Paint	Storage - East - Northwest Corner	Convenient	None Detected
		Texture		Convenient	None Detected
		Tape		Convenient	None Detected
		Joint Compound		Convenient	None Detected
		Drywall with Paper		Convenient	None Detected

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ0959.3119-PLM-120	61	Orange Peel Texture Drywall System - Paint	Custodial - Northwest Corner	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	
AZ0959.3119-PLM-121	62	Counter Caulking	Men's Coach Office - Northeast	Convenient	None Detected	
AZ0959.3119-PLM-122		Counter Caulking	Men's Coach Office - West	Convenient	None Detected	
AZ0959.3119-PLM-123		Counter Caulking	Girl's Coach Office - Northeast	Convenient	None Detected	
AZ0959.3119-PLM-124	63	Fiberglass Reinforced Plastic (FRP)	Men's Coach RR - Northeast	Convenient	None Detected	
	64	Tan Mastic for Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected	
AZ0959.3119-PLM-125	63	Fiberglass Reinforced Plastic (FRP)	Custodial - Southwest	Convenient	None Detected	
	64	Tan Mastic for Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected	
AZ0959.3119-PLM-126	63	Fiberglass Reinforced Plastic (FRP)	Men's Coach RR - Northeast	Convenient	None Detected	
	64	Tan Mastic for Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected	
AZ0959.3119-PLM-127	65	Restroom Greenboard - Paint	Men's Coach RR - South	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Drywall		Convenient	None Detected	
AZ0959.3119-PLM-128	65	Restroom Greenboard - Paint	Girl's Coach RR - Southwest	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Drywall		Convenient	None Detected	
AZ0959.3119-PLM-129	65	Restroom Greenboard - Paint	Girl's Coach RR - Northwest	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Drywall		Convenient	None Detected	
AZ0959.3119-PLM-130	66	Blue Cove Baseboard	Men's Coach Office - Entry - Southwest	Convenient	None Detected	
	67	Yellow Mastic for Blue Cove Baseboard		Convenient	None Detected	
AZ0959.3119-PLM-131	66	Blue Cove Baseboard	Custodial - West	Convenient	None Detected	
	67	Yellow Mastic for Blue Cove Baseboard		Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ0959.3119-PLM-132	66	Blue Cove Baseboard	Girl's Coach Office - Northwest Corner	Convenient	None Detected	
	67	Yellow Mastic for Blue Cove Baseboard		Convenient	None Detected	
AZ0959.3119-PLM-133	68	Fixture Caulking	Girl's Coach RR - Northwest	Convenient	None Detected	
AZ0959.3119-PLM-134		Fixture Caulking	Girl's Coach RR - Northwest	Convenient	None Detected	
AZ0959.3119-PLM-135		Fixture Caulking	Men's Coach RR - Northeast Corner	Convenient	None Detected	
AZ0959.3119-PLM-136	69	Mop Sink Caulking	Custodial - Southwest Corner	Convenient	None Detected	
AZ0959.3119-PLM-137		Mop Sink Caulking	Custodial - Southwest Corner	Convenient	None Detected	
AZ0959.3119-PLM-138		Mop Sink Caulking	Custodial - Southwest Corner	Convenient	None Detected	
AZ0959.3119-PLM-139	70	Door Frame Caulking	Men's Coach Office - Entry - Southeast	Convenient	None Detected	
AZ0959.3119-PLM-140		Door Frame Caulking	Men's Coach Office - Southeast	Convenient	None Detected	
AZ0959.3119-PLM-141		Door Frame Caulking	Girl's Coach Office - Entry - Southwest	Convenient	None Detected	
AZ0959.3119-PLM-142	71	White 4" x 8" Ceramic Tile	Girl's Coach Office - Northeast Corner	Convenient	None Detected	
	72	Mastic for White 4" x 8" Ceramic Tile		Convenient	None Detected	
	73	Grout for White 4" x 8" Ceramic Tile		Convenient	None Detected	
AZ0959.3119-PLM-143	71	White 4" x 8" Ceramic Tile	Girl's Coach Office - Northeast	Convenient	None Detected	
	72	Mastic for White 4" x 8" Ceramic Tile		Convenient	None Detected	
	73	Grout for White 4" x 8" Ceramic Tile		Convenient	None Detected	
AZ0959.3119-PLM-144	71	White 4" x 8" Ceramic Tile	Girl's Coach Office - Northeast	Convenient	None Detected	
	72	Mastic for White 4" x 8" Ceramic Tile		Convenient	None Detected	
	73	Grout for White 4" x 8" Ceramic Tile		Convenient	None Detected	
AZ0959.3119-PLM-145	74	White 4" x 4" Ceramic Tile	Girl's Coach Office - East	Convenient	None Detected	
	75	Grout for White 4" x 4" Ceramic Tile		Convenient	None Detected	
	76	Concrete for White 4" x 4" Ceramic Tile		Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ0959.3119-PLM-146	74	White 4" x 4" Ceramic Tile	Girl's Coach Office - Southeast	Convenient	None Detected
	75	Grout for White 4" x 4" Ceramic Tile		Convenient	None Detected
	76	Concrete for White 4" x 4" Ceramic Tile		Convenient	None Detected
AZ0959.3119-PLM-147	74	White 4" x 4" Ceramic Tile	Girl's Coach Office - Southeast	Convenient	None Detected
	75	Grout for White 4" x 4" Ceramic Tile		Convenient	None Detected
	76	Concrete for White 4" x 4" Ceramic Tile		Convenient	None Detected
AZ0959.3119-PLM-148	77	Pink Insulation	Storage - Center - West	Convenient	None Detected
	78	Brown Paper and Silver Foil Backing for Pink Insulation		Convenient	None Detected
AZ0959.3119-PLM-149	77	Pink Insulation	Storage - Center - Northeast	Convenient	None Detected
	78	Brown Paper and Silver Foil Backing for Pink Insulation		Convenient	None Detected
AZ0959.3119-PLM-150	77	Pink Insulation	Storage - Center - South	Convenient	None Detected
	78	Brown Paper and Silver Foil Backing for Pink Insulation		Convenient	None Detected
Sample Date: May 16, 2023 - AHERA Building Inspector: Xin Lou (Certification #4644-548-092022)					
AZ0959.3384-PLM-151	79	Orange Peel Texture Drywall System - White Paint	Room D9 - Northeast Corner	Convenient	None Detected
		Texture		Convenient	None Detected
		Tape		Convenient	None Detected
		Joint Compound		Convenient	None Detected
		Drywall with Paper		Convenient	None Detected
AZ0959.3384-PLM-152	79	Orange Peel Texture Drywall System - White Paint	Room D9 - Southeast	Convenient	None Detected
		Texture		Convenient	None Detected
		Tape		Convenient	None Detected
		Joint Compound		Convenient	None Detected
		Drywall with Paper		Convenient	None Detected

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ0959.3384-PLM-153	79	Orange Peel Texture Drywall System - White Paint	Room D9 - Southeast	Convenient	None Detected	
		Texture		Convenient	None Detected	
		Tape		Convenient	None Detected	
		Joint Compound		Convenient	None Detected	
		Drywall with Paper		Convenient	None Detected	
AZ0959.3384-PLM-154	80	Blue Cove Base	Room D9 - Northeast Corner	Convenient	None Detected	
	81	Cream Mastic for Blue Cove Base		Convenient	None Detected	
AZ0959.3384-PLM-155	80	Blue Cove Base	Room D9 - Southeast	Convenient	None Detected	
	81	Cream Mastic for Blue Cove Base		Convenient	None Detected	
AZ0959.3384-PLM-156	80	Blue Cove Base	Room D9 - Southeast	Convenient	None Detected	
	81	Cream Mastic for Blue Cove Base		Convenient	None Detected	
AZ0959.3384-PLM-157	82	White Cabinet Caulking	Room D9 - Northeast	Convenient	None Detected	
AZ0959.3384-PLM-158		White Cabinet Caulking	Room D9 - East	Convenient	None Detected	
AZ0959.3384-PLM-159		White Cabinet Caulking	Room D9 - East	Convenient	None Detected	
AZ0959.3384-PLM-160	83	White Sink Caulking	D9 Restroom - East	Convenient	None Detected	
AZ0959.3384-PLM-161		White Sink Caulking	D9 Restroom - Southeast	Convenient	None Detected	
AZ0959.3384-PLM-162		White Sink Caulking	D9 Restroom - Southeast Corner	Convenient	None Detected	
AZ0959.3384-PLM-163	84	4" x 4" Off-White Ceramic Wall Tile	Shower - Northeast Corner	Convenient	None Detected	
	85	Cream Mastic for 4" x 4" Off-White Ceramic Wall Tile		Convenient	None Detected	
AZ0959.3384-PLM-164	84	4" x 4" Off-White Ceramic Wall Tile	Shower - Northwest Corner	Convenient	None Detected	
	85	Cream Mastic for 4" x 4" Off-White Ceramic Wall Tile		Convenient	None Detected	
AZ0959.3384-PLM-165	84	4" x 4" Off-White Ceramic Wall Tile	Shower - Southwest	Convenient	None Detected	
	85	Cream Mastic for 4" x 4" Off-White Ceramic Wall Tile		Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53				Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ0959.3384-PLM-166	86	White Grout	Shower - Northeast Corner	Convenient	None Detected
AZ0959.3384-PLM-167		White Grout	Shower - Northwest Corner	Convenient	None Detected
AZ0959.3384-PLM-168		White Grout	Shower - Southwest	Convenient	None Detected
AZ0959.3384-PLM-169	87	White 12" x 12" Beige Vinyl Floor Tile	Room D9 - Southeast	Convenient	None Detected
AZ0959.3384-PLM-170		White 12" x 12" Beige Vinyl Floor Tile	Room D9 - Northeast	Convenient	None Detected
AZ0959.3384-PLM-171		White 12" x 12" Beige Vinyl Floor Tile	Storage - Northwest Corner	Convenient	None Detected
Sample Date: March 11, 2024 - AHERA Building Inspector: Tracey Carpenter (Certification #4644-14588-090523)					
AZ1418.11-PLM-172	88	12" x 12" Tan Vinyl Floor Tile	Gymnasium Building - South Hall - Southwest	Convenient	None Detected
	89	Black/Yellow Mastic for 12" x 12" Tan Vinyl Floor Tile		Convenient	None Detected
AZ1418.11-PLM-173	88	12" x 12" Tan Vinyl Floor Tile	Gymnasium Building - Center Hall - Southeast	Convenient	None Detected
	89	Black/Yellow Mastic for 12" x 12" Tan Vinyl Floor Tile		Convenient	None Detected
AZ1418.11-PLM-174	88	12" x 12" Tan Vinyl Floor Tile	Gymnasium Building - Center Hall - Northeast	Convenient	None Detected
	89	Black/Yellow Mastic for 12" x 12" Tan Vinyl Floor Tile		Convenient	None Detected
Sample Date: February 11, 2025 - AHERA Building Inspector: Isai Portillo (Certification #188748-19438-121224)					
AZ1418.53-PLM-175	90	12" x 12" White/Gray Specs Vinyl Floor Tile (VCT)	Band D3 - West	Convenient	None Detected
	91	Black Mastic for 12" x 12" White/Gray Specs VCT		Convenient	None Detected
AZ1418.53-PLM-176	90	12" x 12" White/Gray Specs Vinyl Floor Tile (VCT)	South Kitchen Hall - North	Convenient	None Detected
	91	Black Mastic for 12" x 12" White/Gray Specs VCT		Convenient	None Detected
AZ1418.53-PLM-177	90	12" x 12" White/Gray Specs Vinyl Floor Tile (VCT)	Gym North Adjacent Room - Southeast Corner	Convenient	None Detected
	91	Black Mastic for 12" x 12" White/Gray Specs VCT		Convenient	None Detected
AZ1418.53-PLM-178	92	White w/ Black Specs 12" x 12" Vinyl Floor Tile (VCT)	Multi-Purpose Room - Northeast	Convenient	None Detected
	93	Yellow Mastic for White w/ Black Specs 12" x 12" VCT		Convenient	None Detected

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ1418.53-PLM-179	92	White w/ Black Specs 12" x 12" Vinyl Floor Tile (VCT)	Art D5 - Center Room - West	Convenient	None Detected	
	93	Yellow Mastic for White w/ Black Specs 12" x 12" VCT		Convenient	None Detected	
AZ1418.53-PLM-180	92	White w/ Black Specs 12" x 12" Vinyl Floor Tile (VCT)	Art D5 - East Room Entry - South	Convenient	None Detected	
	93	Yellow Mastic for White w/ Black Specs 12" x 12" VCT		Convenient	None Detected	
AZ1418.53-PLM-181	94	Black w/ White Specs 12" x 12" Vinyl Floor Tile (VCT)	Music D2 - Southwest Corner	Convenient	None Detected	
	95	Yellow Mastic for Black w/ White Specs 12" x 12" VCT		Convenient	None Detected	
AZ1418.53-PLM-182	94	Black w/ White Specs 12" x 12" Vinyl Floor Tile (VCT)	Music D2 - Northwest Corner	Convenient	None Detected	
	95	Yellow Mastic for Black w/ White Specs 12" x 12" VCT		Convenient	None Detected	
AZ1418.53-PLM-183	94	Black w/ White Specs 12" x 12" Vinyl Floor Tile (VCT)	Music D2 - Southeast Corner	Convenient	None Detected	
	95	Yellow Mastic for Black w/ White Specs 12" x 12" VCT		Convenient	None Detected	
AZ1418.53-PLM-184	96	White 2" x 2" Ceiling Tile	Room D1 - Southeast Corner	Convenient	None Detected	
AZ1418.53-PLM-185		White 2" x 2" Ceiling Tile	Gym North Adjacent Room - Southwest Corner	Convenient	None Detected	
AZ1418.53-PLM-186		White 2" x 2" Ceiling Tile	CADD D7 - Southeast Corner	Convenient	None Detected	
AZ1418.53-PLM-187	97	Gray/Blue Square Carpet	Room D1 - Southwest Corner	Convenient	None Detected	
	98	Green Mastic for Gray/Blue Square Carpet		Convenient	None Detected	
AZ1418.53-PLM-188	97	Gray/Blue Square Carpet	Band D3 - Southeast	Convenient	None Detected	
	98	Green Mastic for Gray/Blue Square Carpet		Convenient	None Detected	
AZ1418.53-PLM-189	97	Gray/Blue Square Carpet	CADD D7 - Northeast Corner	Convenient	None Detected	
	98	Green Mastic for Gray/Blue Square Carpet		Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ1418.53-PLM-190	99	Orange Peel Texture Drywall System - Paint	North Room Near D8 - Southeast Corner	Convenient	None Detected	
		White Texture		Convenient	None Detected	
		Cream Tape		Convenient	None Detected	
		White Joint Compound		Convenient	None Detected	
		White Drywall with Brown Paper		Convenient	None Detected	
AZ1418.53-PLM-191	99	Orange Peel Texture Drywall System - Paint	North Room Near D8 - Southwest Corner	Convenient	None Detected	
		White Texture		Convenient	None Detected	
		Cream Tape		Convenient	None Detected	
		White Joint Compound		Convenient	None Detected	
		White Drywall with Brown Paper		Convenient	None Detected	
AZ1418.53-PLM-192	99	Orange Peel Texture Drywall System - Paint	Room D8 - Southeast Corner	Convenient	None Detected	
		White Texture		Convenient	None Detected	
		White Joint Compound with Paint		Convenient	None Detected	
		Yellow Tape (Mesh)		Convenient	None Detected	
		Cream Tape		Convenient	None Detected	
		White Joint Compound		Convenient	None Detected	
		White Drywall with Brown Paper		Convenient	None Detected	
AZ1418.53-PLM-193	100	12" x 12" White w/Gray Specs Vinyl Floor Tile (VCT)	Room D9 Southeast Room - Southwest Corner	Convenient	None Detected	
	101	Black Mastic for 12" x 12" White w/Gray Specs		Convenient	None Detected	
AZ1418.53-PLM-194	100	12" x 12" White w/Gray Specs Vinyl Floor Tile (VCT)	Room D9 South Room - Southeast	Convenient	None Detected	
	101	Black Mastic for 12" x 12" White w/Gray Specs		Convenient	None Detected	
AZ1418.53-PLM-195	100	12" x 12" White w/Gray Specs Vinyl Floor Tile (VCT)	Room D9 Southeast Room - Southeast Corner	Convenient	None Detected	
	101	Black Mastic for 12" x 12" White w/Gray Specs		Convenient	None Detected	
AZ1418.53-PLM-196	102	Gray/Blue Square Carpet	Room D8 - Northwest Corner	Convenient	None Detected	
	103	Tan Mastic for Gray/Blue Square Carpet		Convenient	None Detected	
AZ1418.53-PLM-197	102	Gray/Blue Square Carpet	Room D8 - Southwest Corner	Convenient	None Detected	
	103	Tan Mastic for Gray/Blue Square Carpet		Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ1418.53-PLM-198	102	Gray/Blue Square Carpet	Room D9 - Northeast Corner	Convenient	None Detected	
	103	Tan Mastic for Gray/Blue Square Carpet		Convenient	None Detected	
AZ1418.53-PLM-199	104	Blue Cove Base	North Room Near D8 - Northwest Corner	Convenient	None Detected	
	105	Tan Mastic for Blue Cove Base		Convenient	None Detected	
AZ1418.53-PLM-200	104	Blue Cove Base	Room D8 - Northeast Corner	Convenient	None Detected	
	105	Tan Mastic for Blue Cove Base		Convenient	None Detected	
AZ1418.53-PLM-201	104	Blue Cove Base	Room D9 Southeast Room - Northeast Corner	Convenient	None Detected	
	105	Tan Mastic for Blue Cove Base		Convenient	None Detected	
AZ1418.53-PLM-202	106	White 2' x 2' Ceiling Tile	North Room Near D8 - South	Convenient	None Detected	
AZ1418.53-PLM-203		White 2' x 2' Ceiling Tile	Room D8 - South	Convenient	None Detected	
AZ1418.53-PLM-204		White 2' x 2' Ceiling Tile	Room D9 - Northwest	Convenient	None Detected	
AZ1418.53-PLM-205	107	White 2" x 2" Ceiling Tile	Office - Stogsdill Brown - South Corner	Convenient	None Detected	
AZ1418.53-PLM-206		White 2" x 2" Ceiling Tile	Office - McCarthy - South	Convenient	None Detected	
AZ1418.53-PLM-207		White 2" x 2" Ceiling Tile	Office - Pleet - North	Convenient	None Detected	
AZ1418.53-PLM-208	108	Gray/Blue Square Carpet	Office - Wood - Northwest Corner	Convenient	None Detected	
	109	Beige Mastic for Gray/Blue Square Carpet		Convenient	None Detected	
AZ1418.53-PLM-209	108	Gray/Blue Square Carpet	Office - Conference Room - Southwest Corner	Convenient	None Detected	
	109	Beige Mastic for Gray/Blue Square Carpet		Convenient	None Detected	
AZ1418.53-PLM-210	108	Gray/Blue Square Carpet	Office - Lucero - Northeast Corner	Convenient	None Detected	
	109	Beige Mastic for Gray/Blue Square Carpet		Convenient	None Detected	
AZ1418.53-PLM-211	110	Blue 4" Cove Base	Office - Pleet - Southwest Corner	Convenient	None Detected	
	111	Cream Mastic for Blue 4" Cove Base		Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ1418.53-PLM-212	110	Blue 4" Cove Base	Office - Bill Brown - Southeast Corner	Convenient	None Detected	
	111	Cream Mastic for Blue 4" Cove Base		Convenient	None Detected	
AZ1418.53-PLM-213	110	Blue 4" Cove Base	Office - Conference Room - Southwest Corner	Convenient	None Detected	
	111	Cream Mastic for Blue 4" Cove Base		Convenient	None Detected	
AZ1418.53-PLM-214	112	Wallpaper Drywall System - Beige	Office - Luttrell - Northwest Corner	Convenient	None Detected	
		White Compound		Convenient	None Detected	
		Cream Tape		Convenient	None Detected	
		White Joint Compound		Convenient	None Detected	
		White Drywall with Brown Paper		Convenient	None Detected	
AZ1418.53-PLM-215	112	Wallpaper Drywall System - Beige	Office - Luttrell - South Corner	Convenient	None Detected	
		White Compound		Convenient	None Detected	
		Cream Tape		Convenient	None Detected	
		White Joint Compound		Convenient	None Detected	
		White Drywall with Brown Paper		Convenient	None Detected	
AZ1418.53-PLM-216	112	Wallpaper Drywall System - Beige	Office - Luttrell - Southeast Corner	Convenient	None Detected	
		White Compound		Convenient	None Detected	
		Cream Tape		Convenient	None Detected	
		White Joint Compound		Convenient	None Detected	
		White Drywall with Brown Paper		Convenient	None Detected	
AZ1418.53-PLM-217	113	Untextured Drywall System	Main Office - South Hallway - Northwest	Convenient	None Detected	
		White Compound		Convenient	None Detected	
		Cream Tape		Convenient	None Detected	
		White Joint Compound		Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ1418.53-PLM-218	113	Untextured Drywall System	Main Office - North Hallway - Center - West	Convenient	None Detected	
		White Compound		Convenient	None Detected	
		Cream Tape		Convenient	None Detected	
		White Joint Compound		Convenient	None Detected	
AZ1418.53-PLM-219	113	Untextured Drywall System	Main Office - Southeast Hallway - Center	Convenient	None Detected	
		White Compound		Convenient	None Detected	
		Cream Tape		Convenient	None Detected	
		White Joint Compound		Convenient	None Detected	
AZ1418.53-PLM-220	114	Orange Peel Texture Drywall - White Paint	Room A6 - Southeast Corner	Convenient	None Detected	
		White Texture		Convenient	None Detected	
		Cream Tape		Convenient	None Detected	
		White Joint Compound		Convenient	None Detected	
		White Drywall with Brown Paper		Convenient	None Detected	
AZ1418.53-PLM-221	114	Orange Peel Texture Drywall - White Paint	Room B7 - Northeast Corner	Convenient	None Detected	
		White Texture		Convenient	None Detected	
		Cream Tape		Convenient	None Detected	
		White Joint Compound		Convenient	None Detected	
		White Drywall with Brown Paper		Convenient	None Detected	
AZ1418.53-PLM-222	114	Orange Peel Texture Drywall - White Paint	Room C11 - Northwest Corner	Convenient	None Detected	
		White Texture		Convenient	None Detected	
		Cream Tape		Convenient	None Detected	
		White Joint Compound		Convenient	None Detected	
		White Drywall with Brown Paper		Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ0959.856+AZ1418.05+AZ0959.2727+AZ0959.3119+AZ0959.3384+AZ1418.11+AZ1418.53					Client: Kyrene ESD	
Sample Dates: 1/15/15+6/8/17+6/7/21+7/20/22+5/15/23+3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content	
AZ1418.53-PLM-223	115	White w/Gray Specs 12" x 12" Vinyl Floor Tile (VCT)	Room B8 - Southeast	Convenient	None Detected	
	116	Brown/Black Mastic for White w/Gray Specs 12" x 12" VCT		Convenient	None Detected	
AZ1418.53-PLM-224	115	White w/Gray Specs 12" x 12" Vinyl Floor Tile (VCT)	Room C8 - Northeast Corner	Convenient	None Detected	
	116	Brown/Black Mastic for White w/Gray Specs 12" x 12" VCT		Convenient	None Detected	
AZ1418.53-PLM-225	115	White w/Gray Specs 12" x 12" Vinyl Floor Tile (VCT)	Storage Near A10 - North	Convenient	None Detected	
	116	Brown/Black Mastic for White w/Gray Specs 12" x 12" VCT		Convenient	None Detected	
AZ1418.53-PLM-226	117	Gray Fireproofing	Room A8 - Northeast	Convenient	None Detected	
AZ1418.53-PLM-227		Gray Fireproofing	Section L1 - West Corner	Convenient	None Detected	
AZ1418.53-PLM-228		Gray Fireproofing	Room C8 - Northwest Corner	Convenient	None Detected	
AZ1418.53-PLM-229	118	Gray/Blue Square Carpet	Room A12 - West	Convenient	None Detected	
	119	Yellow Mastic for Gray/Blue Square Carpet		Convenient	None Detected	
AZ1418.53-PLM-230	118	Gray/Blue Square Carpet	Room C2 - Southeast	Convenient	None Detected	
	119	Yellow Mastic for Gray/Blue Square Carpet		Convenient	None Detected	
AZ1418.53-PLM-231	118	Gray/Blue Square Carpet	Room C16 - South Corner	Convenient	None Detected	
	119	Yellow Mastic for Gray/Blue Square Carpet		Convenient	None Detected	
AZ1418.53-PLM-232	120	White 2" x 2" Ceiling Tile	Room A2 - West Corner	Convenient	None Detected	
AZ1418.53-PLM-233		White 2" x 2" Ceiling Tile	Room A18 - Southeast Corner	Convenient	None Detected	
AZ1418.53-PLM-234		White 2" x 2" Ceiling Tile	Room B11 - Northwest	Convenient	None Detected	

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ1418.11+AZ1418.53				Client: Kyrene ESD	
Sample Dates: 3/11/24+2/11/25				Site: Kyrene Akimel A-al Middle School	
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: March 11, 2024 - AHERA Building Inspector: Tracey Carpenter (Certification #4644-14588-090523)					
AZ1418.11-PLM-1	1	White Restroom Ceramic Wall Tile	Concession Building - Men's RR - North	Convenient	None Detected
	2	Tan Grout for White Restroom Ceramic Wall Tile		Convenient	None Detected
	3	Cream Mastic for White Restroom Ceramic Wall Tile		Convenient	None Detected
AZ1418.11-PLM-2	1	White Restroom Ceramic Wall Tile	Concession Building - Men's RR - Southwest	Convenient	None Detected
	2	Tan Grout for White Restroom Ceramic Wall Tile		Convenient	None Detected
	3	Cream Mastic for White Restroom Ceramic Wall Tile		Convenient	None Detected
AZ1418.11-PLM-3	1	White Restroom Ceramic Wall Tile	Concession Building - Men's RR - Northeast	Convenient	None Detected
	2	Tan Grout for White Restroom Ceramic Wall Tile		Convenient	None Detected
	3	Cream Mastic for White Restroom Ceramic Wall Tile		Convenient	None Detected
Sample Date: February 11, 2025 - AHERA Building Inspector: Isai Portillo (Certification #188748-19438-121224)					
AZ1418.53-PLM-4	4	Orange Peel Texture Drywall System - White Paint	Concession - Storage 2 - Northwest Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.53-PLM-5	4	Orange Peel Texture Drywall System - White Paint	Concession - Storage 2 - Southeast Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Numbers: AZ1418.11+AZ1418.53					Client: Kyrene ESD
Sample Dates: 3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.53-PLM-6	4	Orange Peel Texture Drywall System - White Paint	Concession - Southwest Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.53-PLM-7	5	Smooth Texture Drywall System - White Paint	Concession - Electrical - Northwest Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.53-PLM-8	5	Smooth Texture Drywall System - White Paint	Concession - Electrical - North	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.53-PLM-9	5	Smooth Texture Drywall System - White Paint	Concession - Electrical - Northeast Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.53-PLM-10	6	Blue 4" Cove Base	Concession - Storage 2 - Southwest Corner	Convenient	None Detected
	7	Yellow Mastic for Blue 4" Cove Base		Convenient	None Detected
AZ1418.53-PLM-11	6	Blue 4" Cove Base	Concession - Storage 2 - Northwest Corner	Convenient	None Detected
	7	Yellow Mastic for Blue 4" Cove Base		Convenient	None Detected

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary



Dominion Project Numbers: AZ1418.11+AZ1418.53					Client: Kyrene ESD
Sample Dates: 3/11/24+2/11/25					Site: Kyrene Akimel A-al Middle School
Sample #	HM #	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.53-PLM-12	6	Blue 4" Cove Base	Concession - Southwest Corner	Convenient	None Detected
	7	Yellow Mastic for Blue 4" Cove Base		Convenient	None Detected
AZ1418.53-PLM-13	8	Gray Concrete Foundation	Concession - Southeast Corner	Convenient	None Detected
	9	Gray Coating for Gray Concrete Foundation		Convenient	None Detected
AZ1418.53-PLM-14	8	Gray Concrete Foundation	Concession - Electrical - Southwest Corner	Convenient	None Detected
	9	Gray Coating for Gray Concrete Foundation		Convenient	None Detected
AZ1418.53-PLM-15	8	Gray Concrete Foundation	Concession - Storage 1 - Southwest Corner	Convenient	None Detected
	9	Gray Coating for Gray Concrete Foundation		Convenient	None Detected
AZ1418.53-PLM-16	10	Tan Brick	Concession - Electrical - Southwest	Convenient	None Detected
	11	Brown Mortar for Tan Brick		Convenient	None Detected
AZ1418.53-PLM-17	10	Tan Brick	Concession - Electrical - South	Convenient	None Detected
	11	Brown Mortar for Tan Brick		Convenient	None Detected
AZ1418.53-PLM-18	10	Tan Brick	Concession - Electrical - Southeast	Convenient	None Detected
	11	Brown Mortar for Tan Brick		Convenient	None Detected

Inspector: Isai Portillo
Certificate # : 188748-19438-121224
State: Arizona

SECTION 7





PLM BULK SAMPLE LOCATION MAPS

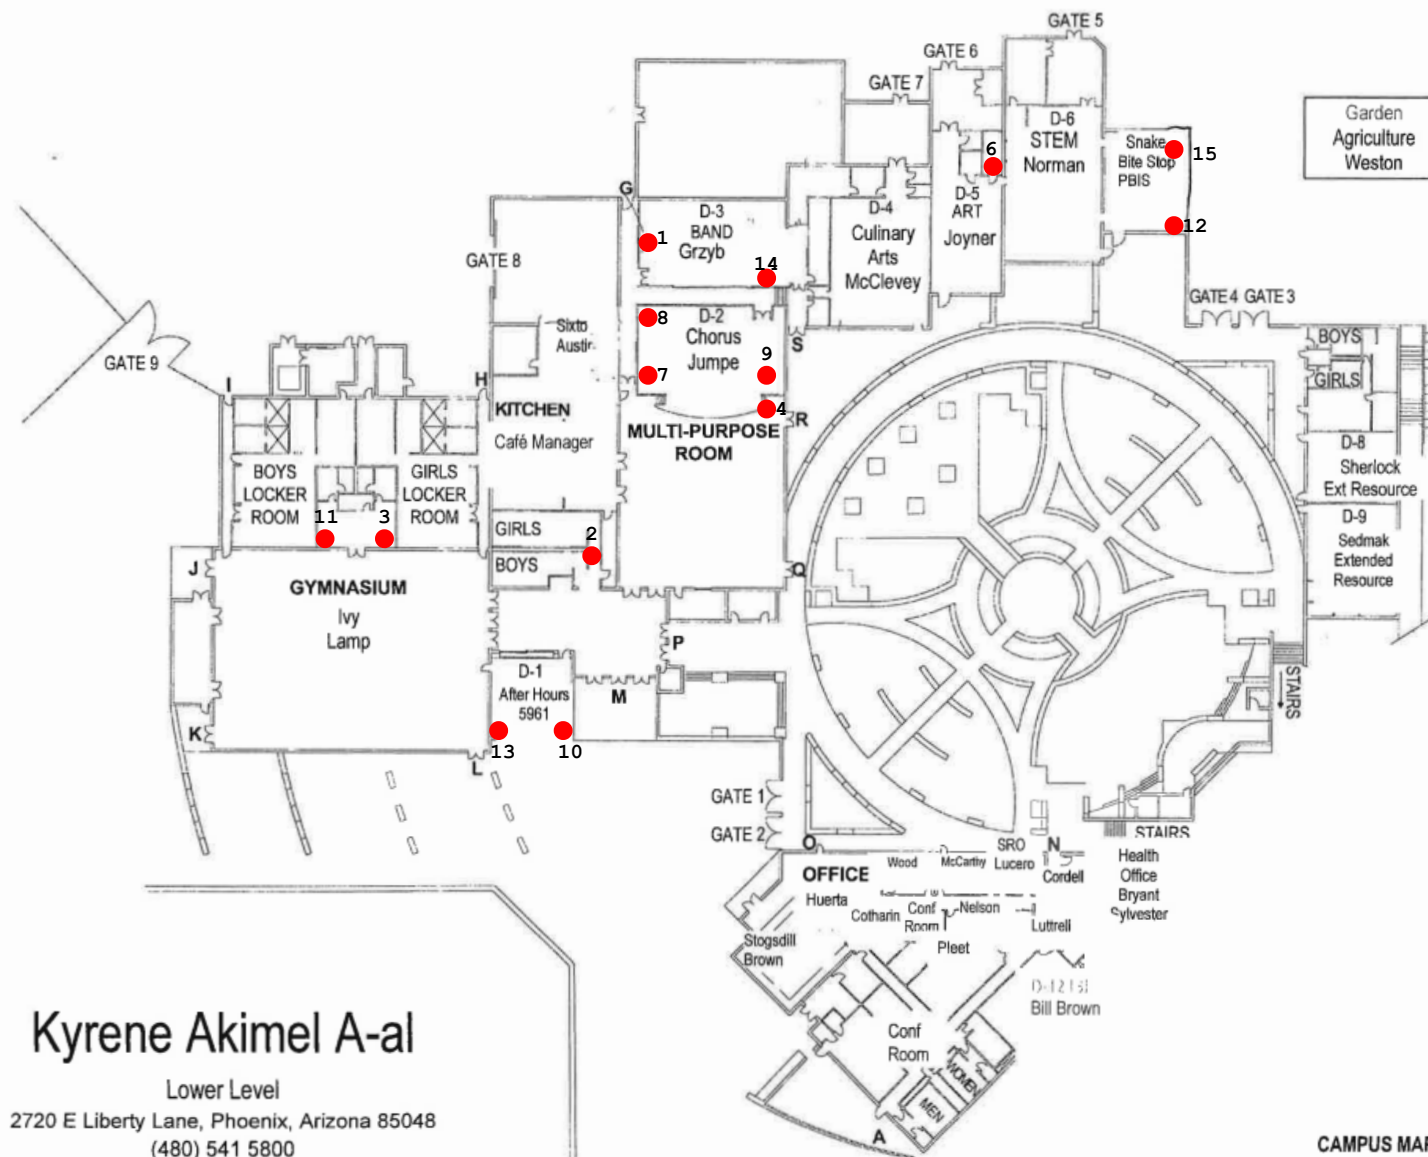

PLM Bulk Sample Location Map (1)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53
Main Building - Lower Level - Gymnasium

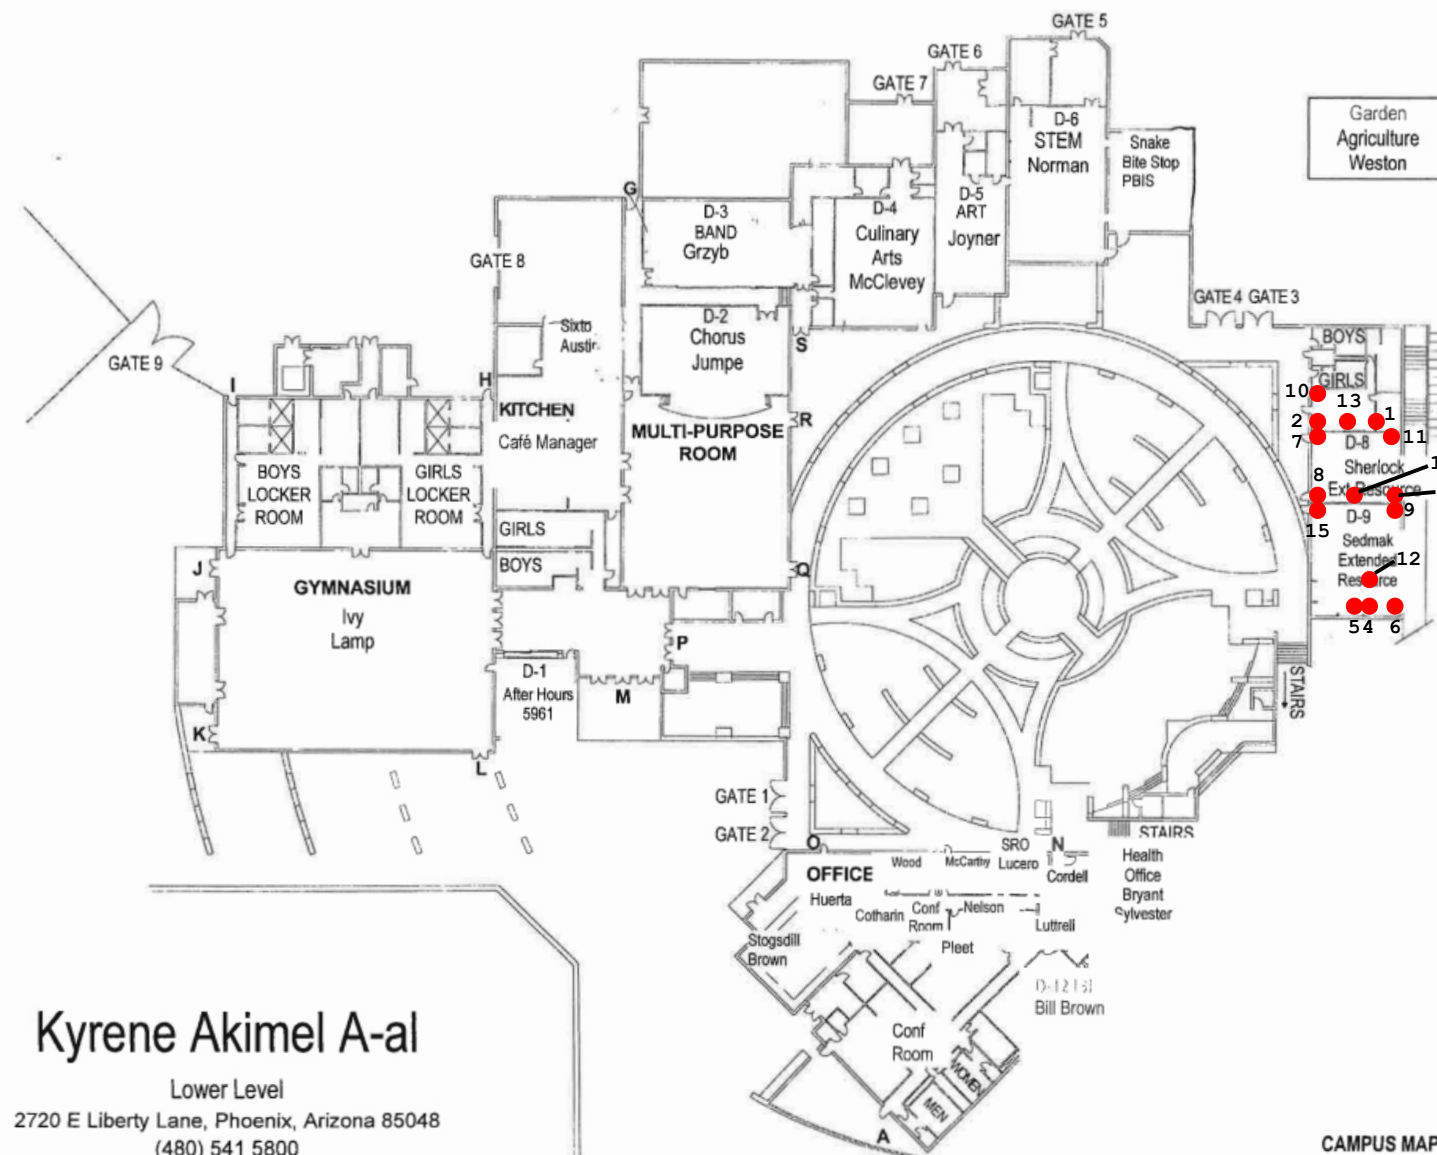



Sample Date:

● February 11, 2025

PLM Bulk Sample Location Map (2)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Lower Level - D8 to D9

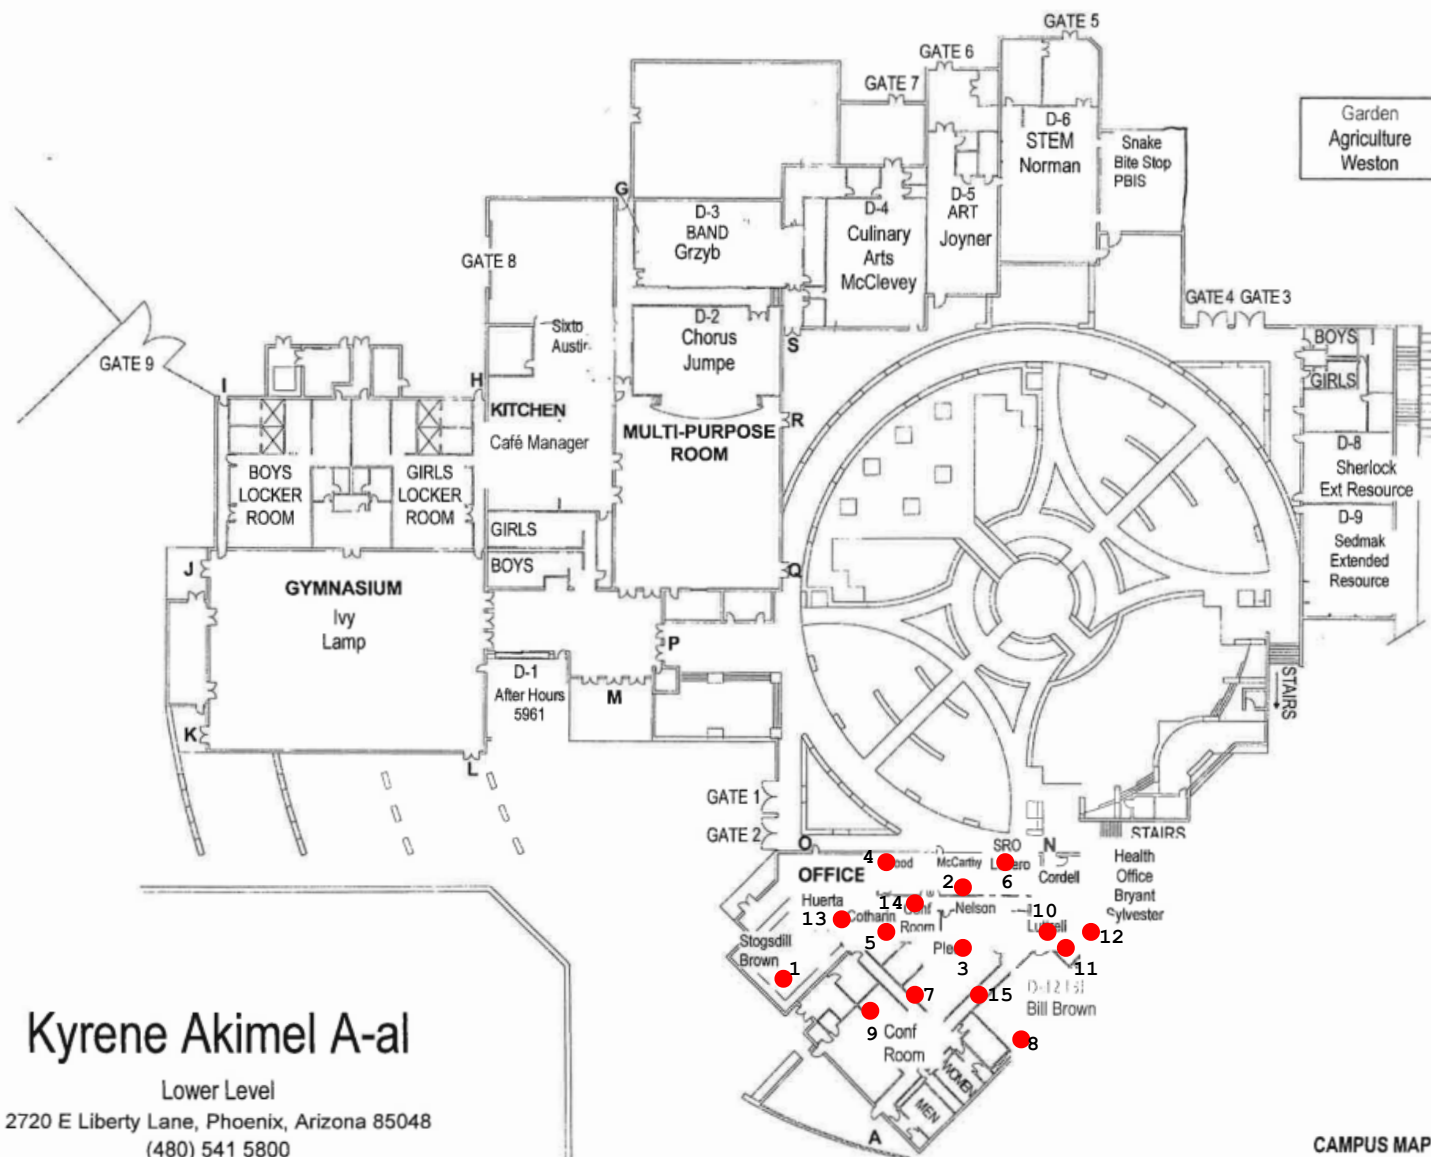

Kyrene Akimel A-al

Lower Level
2720 E Liberty Lane, Phoenix, Arizona 85048
(480) 541 5800

CAMPUS MAP 2024-2025

Sample Date:



● February 11, 2025

PLM Bulk Sample Location Map (3)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Lower Level - Offices

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

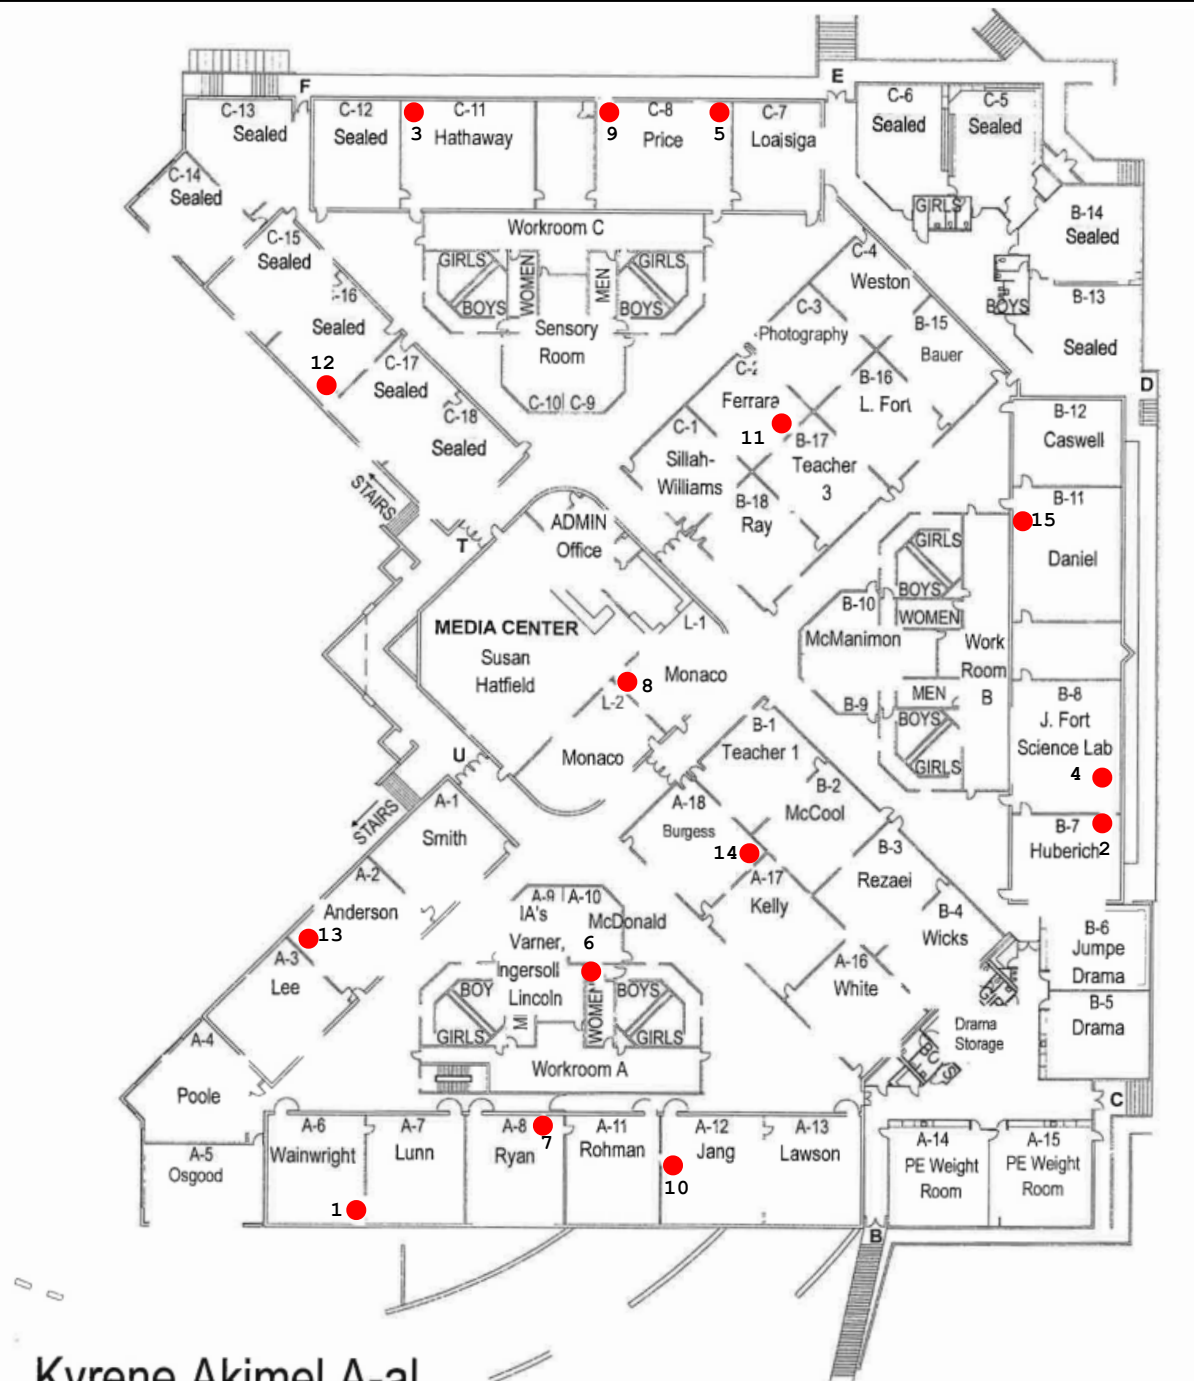

Kyrene Akimel A-al

Upper Level
2720 E Liberty Lane, Phoenix, Arizona 85048
(480) 783-1600

Sample Date:

CAMPUS MAP 2024-2025



February 11, 2025

PLM Bulk Sample Location Map (4)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Second Level

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

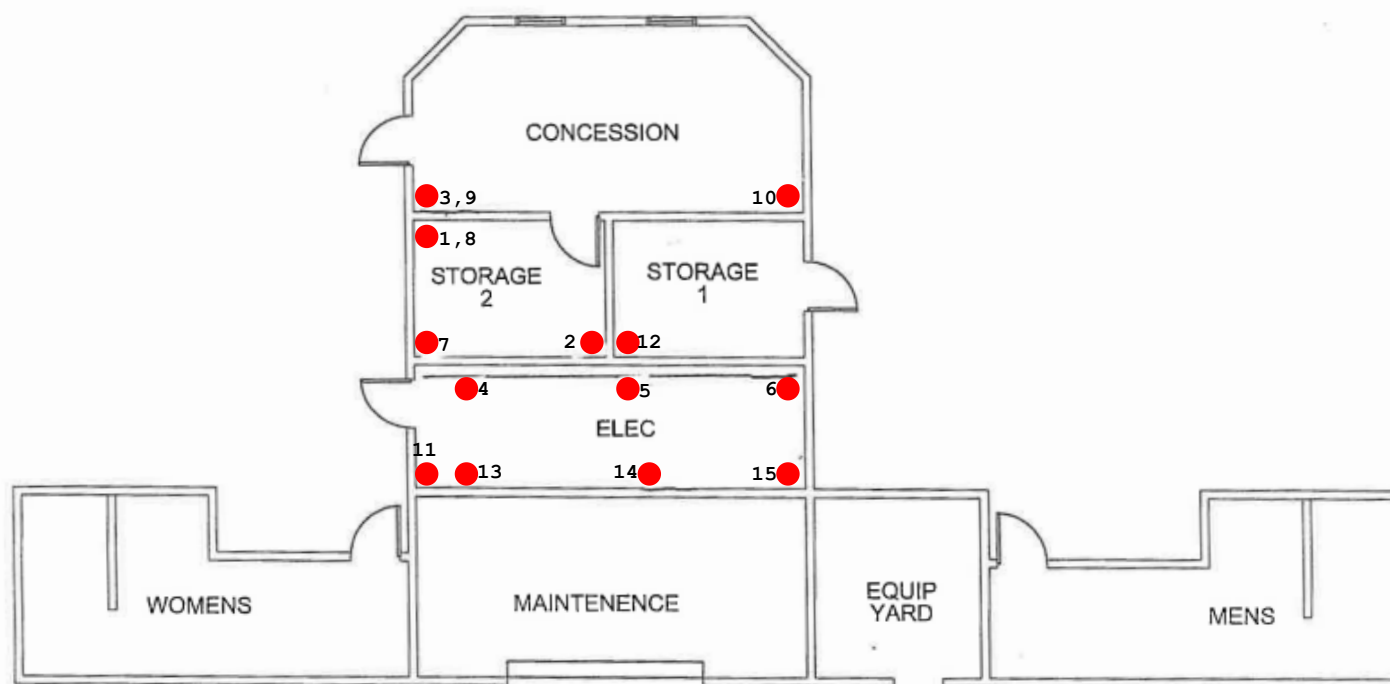

Sample Date:

● February 11, 2025

PLM Bulk Sample Location Map (5)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Concession Building

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

SECTION 8



PHYSICAL ASSESSMENT INFORMATION SHEETS

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.53	Client: Kyrene Elementary School District	Site: Kyrene Akimel A-al Middle School	Bldg #: Main
(HM) Material #: 195	Quantity of Material: 2,400 sq. ft.	Material in Air Plenum? Yes No	
Material Description: Insulation for White Ceiling Wrap		Material Location(s): Room D6	
Material Type: TSI Surfacing Miscellaneous (Circle One)			

Physical Assessment Categories	
☐ 1) Damaged or significantly damaged TSI ACBM ☐ 2) Damaged friable surfacing ACBM ☐ 3) Significantly damaged friable surfacing ACBM ☐ 4) Damaged or significantly damaged friable misc. ACBM	☐ 5) ACBM with potential for damage ☐ 6) ACBM with potential for significant damage ☒ 7) Any remaining friable ACBM or friable suspect ACBM

Material Condition		
Damage Type: ☐ Physical ☐ Water ☐ Vandalism ☐ Vibration	☐ Air Erosion ☐ Other ☒ None	
Damage Extent: ■ Low <1% evenly; 10% locally ☐ Moderate <10% evenly; 10% - 25% locally ☐ High >10% evenly; >25% locally		
Description of Damage: None, Assumed ACBM		

Exposure Factors				
☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☐ Low ☒ Moderate ☐ High
Preventative Measures: Low Potential for Disturbance				

Hazard Classification/Assessment Categories	
☒ 1) Good condition with low potential for disturbance damage ☐ 2) Good condition with potential for disturbance damage ☐ 3) Good condition with potential for significant disturbance damage ☐ 4) Damaged condition with low potential for disturbance damage	☐ 5) Damaged condition with potential for disturbance damage ☐ 6) Damaged condition with potential for significant disturbance damage ☐ 7) Significant damage with potential for any disturbance

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:

State: Arizona

Exp Date: December 12, 2025

Management Planner: Basilio Marcos

Certificate #: ON-4651-1419-061924

Signature:

State: Arizona

Exp Date: June 19, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.53	Client: Kyrene Elementary School District	Site: Kyrene Akimel A-al Middle School	Bldg #: Main
(HM) Material #: 197	Quantity of Material: 2,400 sq. ft.	Material in Air Plenum? Yes No	
Material Description: Insulation for White Pipe Wrap		Material Location(s): Room D6	
Material Type: TSI (Circle One) Surfacing Miscellaneous			

Physical Assessment Categories	
☐ 1) Damaged or significantly damaged TSI ACBM ☐ 2) Damaged friable surfacing ACBM ☐ 3) Significantly damaged friable surfacing ACBM ☐ 4) Damaged or significantly damaged friable misc. ACBM	☐ 5) ACBM with potential for damage ☐ 6) ACBM with potential for significant damage ☒ 7) Any remaining friable ACBM or friable suspect ACBM

Material Condition			
Damage Type: ☐ Physical ☐ Vandalism	☐ Water ☐ Vibration	☐ Air Erosion ☒ None	☐ Other
Damage Extent: ☒ Low <1% evenly; 10% locally ☐ Moderate <10% evenly; 10% - 25% locally ☐ High >10% evenly; >25% locally			
Description of Damage: None, Assumed ACBM			

Exposure Factors				
☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☐ Low ☒ Moderate ☐ High
Preventative Measures: Low Potential for Disturbance				

Hazard Classification/Assessment Categories	
☒ 1) Good condition with low potential for disturbance damage ☐ 2) Good condition with potential for disturbance damage ☐ 3) Good condition with potential for significant disturbance damage ☐ 4) Damaged condition with low potential for disturbance damage	☐ 5) Damaged condition with potential for disturbance damage ☐ 6) Damaged condition with potential for significant disturbance damage ☐ 7) Significant damage with potential for any disturbance

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Basilio Marcos

Certificate #: ON-4651-1419-061924

Signature:



State: Arizona

Exp Date: June 19, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.53	Client: Kyrene Elementary School District	Site: Kyrene Akimel A-al Middle School	Bldg #: Main
(HM) Material #: 200	Quantity of Material: 5,000 sq. ft.	Material in Air Plenum? Yes No	
Material Description: Insulation for Silver Ceiling Wrap		Material Location(s): Above Plenum	
Material Type: TSI Surfacing Miscellaneous (Circle One)			

Physical Assessment Categories	
☐ 1) Damaged or significantly damaged TSI ACBM ☐ 2) Damaged friable surfacing ACBM ☐ 3) Significantly damaged friable surfacing ACBM ☐ 4) Damaged or significantly damaged friable misc. ACBM	☐ 5) ACBM with potential for damage ☐ 6) ACBM with potential for significant damage ☒ 7) Any remaining friable ACBM or friable suspect ACBM

Material Condition		
Damage Type: ☐ Physical ☐ Water ☐ Vandalism ☐ Vibration	☐ Air Erosion ☐ Other ☒ None	
Damage Extent: ☒ Low <1% evenly; 10% locally ☐ Moderate <10% evenly; 10% - 25% locally ☐ High >10% evenly; >25% locally		
Description of Damage: None, Assumed ACBM		

Exposure Factors				
☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☐ Low ☒ Moderate ☐ High
Preventative Measures: Low Potential for Disturbance				

Hazard Classification/Assessment Categories	
☒ 1) Good condition with low potential for disturbance damage ☐ 2) Good condition with potential for disturbance damage ☐ 3) Good condition with potential for significant disturbance damage ☐ 4) Damaged condition with low potential for disturbance damage	☐ 5) Damaged condition with potential for disturbance damage ☐ 6) Damaged condition with potential for significant disturbance damage ☐ 7) Significant damage with potential for any disturbance

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:

State: Arizona

Exp Date: December 12, 2025

Management Planner: Basilio Marcos

Certificate #: ON-4651-1419-061924

Signature:

State: Arizona

Exp Date: June 19, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.53	Client: Kyrene Elementary School District	Site: Kyrene Akimel A-al Middle School	Bldg #: Main
(HM) Material #: 203	Quantity of Material: 5,000 sq. ft.	Material in Air Plenum? Yes No	
Material Description: Insulation for Silver Flex Duct Wrap		Material Location(s): Above Plenum	
Material Type: TSI (Circle One) Surfacing Miscellaneous			

Physical Assessment Categories	
☐ 1) Damaged or significantly damaged TSI ACBM ☐ 2) Damaged friable surfacing ACBM ☐ 3) Significantly damaged friable surfacing ACBM ☐ 4) Damaged or significantly damaged friable misc. ACBM	☐ 5) ACBM with potential for damage ☐ 6) ACBM with potential for significant damage ☒ 7) Any remaining friable ACBM or friable suspect ACBM

Material Condition		
Damage Type: ☐ Physical ☐ Vandalism	☐ Water ☐ Vibration	☐ Air Erosion ☐ Other ☒ None
Damage Extent: ☒ Low <1% evenly; 10% locally ☐ Moderate <10% evenly; 10% - 25% locally ☐ High >10% evenly; >25% locally		
Description of Damage: None, Assumed ACBM		

Exposure Factors				
☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☐ Low ☒ Moderate ☐ High
Preventative Measures: Low Potential for Disturbance				

Hazard Classification/Assessment Categories	
☒ 1) Good condition with low potential for disturbance damage ☐ 2) Good condition with potential for disturbance damage ☐ 3) Good condition with potential for significant disturbance damage ☐ 4) Damaged condition with low potential for disturbance damage	☐ 5) Damaged condition with potential for disturbance damage ☐ 6) Damaged condition with potential for significant disturbance damage ☐ 7) Significant damage with potential for any disturbance

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Basilio Marcos

Certificate #: ON-4651-1419-061924

Signature:



State: Arizona

Exp Date: June 19, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.53	Client: Kyrene Elementary School District	Site: Kyrene Akimel A-al Middle School	Bldg #: Main
(HM) Material #: 215		Quantity of Material: 5,000 sq. ft.	Material in Air Plenum? Yes No
Material Description: Insulation for Silver Duct Wrap		Material Location(s): Above Plenum	
Material Type: TSI (Circle One)		Surfacing Miscellaneous	

Physical Assessment Categories	
☐ 1) Damaged or significantly damaged TSI ACBM ☐ 2) Damaged friable surfacing ACBM ☐ 3) Significantly damaged friable surfacing ACBM ☐ 4) Damaged or significantly damaged friable misc. ACBM	☐ 5) ACBM with potential for damage ☐ 6) ACBM with potential for significant damage ☒ 7) Any remaining friable ACBM or friable suspect ACBM

Material Condition			
Damage Type: ☐ Physical ☐ Vandalism	☐ Water ☐ Vibration	☐ Air Erosion ☒ None	☐ Other
Damage Extent: ■ Low <1% evenly; 10% locally ☐ Moderate <10% evenly; 10% - 25% locally ☐ High >10% evenly; >25% locally			
Description of Damage: None, Assumed ACBM			

Exposure Factors				
☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☐ Low ☒ Moderate ☐ High
Preventative Measures: Low Potential for Disturbance				

Hazard Classification/Assessment Categories	
☒ 1) Good condition with low potential for disturbance damage ☐ 2) Good condition with potential for disturbance damage ☐ 3) Good condition with potential for significant disturbance damage ☐ 4) Damaged condition with low potential for disturbance damage	☐ 5) Damaged condition with potential for disturbance damage ☐ 6) Damaged condition with potential for significant disturbance damage ☐ 7) Significant damage with potential for any disturbance

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:

State: Arizona

Exp Date: December 12, 2025

Management Planner: Basilio Marcos

Certificate #: ON-4651-1419-061924

Signature:

State: Arizona

Exp Date: June 19, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.53	Client: Kyrene Elementary School District	Site: Kyrene Akimel A-al Middle School	Bldg #: Main
(HM) Material #: 232	Quantity of Material: 2,400 sq. ft.	Material in Air Plenum? Yes No	
Material Description: Insulation for Black Flex Duct Wrap		Material Location(s): Main Office	
Material Type: TSI Surfacing Miscellaneous (Circle One)			

Physical Assessment Categories	
☐ 1) Damaged or significantly damaged TSI ACBM ☐ 2) Damaged friable surfacing ACBM ☐ 3) Significantly damaged friable surfacing ACBM ☐ 4) Damaged or significantly damaged friable misc. ACBM	☐ 5) ACBM with potential for damage ☐ 6) ACBM with potential for significant damage ☒ 7) Any remaining friable ACBM or friable suspect ACBM

Material Condition	
Damage Type: ☐ Physical ☐ Water ☐ Vandalism ☐ Vibration	☐ Air Erosion ☐ Other ☒ None
Damage Extent: ☒ Low <1% evenly; 10% locally ☐ Moderate <10% evenly; 10% - 25% locally ☐ High >10% evenly; >25% locally	
Description of Damage: None, Assumed ACBM	

Exposure Factors				
☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☐ Low ☒ Moderate ☐ High
Preventative Measures: Low Potential for Disturbance				

Hazard Classification/Assessment Categories	
☒ 1) Good condition with low potential for disturbance damage ☐ 2) Good condition with potential for disturbance damage ☐ 3) Good condition with potential for significant disturbance damage ☐ 4) Damaged condition with low potential for disturbance damage	☐ 5) Damaged condition with potential for disturbance damage ☐ 6) Damaged condition with potential for significant disturbance damage ☐ 7) Significant damage with potential for any disturbance

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Basilio Marcos

Certificate #: ON-4651-1419-061924

Signature:



State: Arizona

Exp Date: June 19, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.53	Client: Kyrene Elementary School District	Site: Kyrene Akimel A-al Middle School	Bldg #: Main
(HM) Material #: 158	Quantity of Material: 5,250 sq. ft.	Material in Air Plenum? Yes No	
Material Description: 2' x 2' Replacement Ceiling Tile		Material Location(s): Throughout Gym	
Material Type: TSI (Circle One)		Surfacing Miscellaneous	

Physical Assessment Categories	
☐ 1) Damaged or significantly damaged TSI ACBM ☐ 2) Damaged friable surfacing ACBM ☐ 3) Significantly damaged friable surfacing ACBM ☐ 4) Damaged or significantly damaged friable misc. ACBM	☐ 5) ACBM with potential for damage ☐ 6) ACBM with potential for significant damage ☒ 7) Any remaining friable ACBM or friable suspect ACBM

Material Condition			
Damage Type: ☐ Physical ☐ Vandalism	☐ Water ☐ Vibration	☐ Air Erosion ☒ None	☐ Other
Damage Extent: ☒ Low <1% evenly; 10% locally ☐ Moderate <10% evenly; 10% - 25% locally ☐ High >10% evenly; >25% locally			
Description of Damage: None, Assumed ACBM			

Exposure Factors				
☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☐ Low ☒ Moderate ☐ High
Preventative Measures: Low Potential for Disturbance				

Hazard Classification/Assessment Categories	
☒ 1) Good condition with low potential for disturbance damage ☐ 2) Good condition with potential for disturbance damage ☐ 3) Good condition with potential for significant disturbance damage ☐ 4) Damaged condition with low potential for disturbance damage	☐ 5) Damaged condition with potential for disturbance damage ☐ 6) Damaged condition with potential for significant disturbance damage ☐ 7) Significant damage with potential for any disturbance

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Basilio Marcos

Certificate #: ON-4651-1419-061924

Signature:



State: Arizona

Exp Date: June 19, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.53	Client: Kyrene Elementary School District	Site: Kyrene Akimel A-al Middle School	Bldg #: Main
(HM) Material #: 168	Quantity of Material: 250 sq. ft.	Material in Air Plenum? Yes No	
Material Description: White Smooth 2' x 2' Ceiling Tile		Material Location(s): Snack Bar & Room D4	
Material Type: TSI Surfacing		Miscellaneous	
(Circle One)			

Physical Assessment Categories	
☐ 1) Damaged or significantly damaged TSI ACBM ☐ 2) Damaged friable surfacing ACBM ☐ 3) Significantly damaged friable surfacing ACBM ☐ 4) Damaged or significantly damaged friable misc. ACBM	☐ 5) ACBM with potential for damage ☐ 6) ACBM with potential for significant damage ☒ 7) Any remaining friable ACBM or friable suspect ACBM

Material Condition			
Damage Type: ☐ Physical ☐ Vandalism	☐ Water ☐ Vibration	☐ Air Erosion ☒ None	☐ Other
Damage Extent: ☒ Low <1% evenly; 10% locally ☐ Moderate <10% evenly; 10% - 25% locally ☐ High >10% evenly; >25% locally			
Description of Damage: None, Assumed ACBM			

Exposure Factors				
☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☐ Low ☒ Moderate ☐ High
Accessibility:	Occupancy:	Potential for Contact:	Potential for Vibration:	Potential for Air Erosion:
Preventative Measures: Low Potential for Disturbance				

Hazard Classification/Assessment Categories	
☒ 1) Good condition with low potential for disturbance damage ☐ 2) Good condition with potential for disturbance damage ☐ 3) Good condition with potential for significant disturbance damage ☐ 4) Damaged condition with low potential for disturbance damage	☐ 5) Damaged condition with potential for disturbance damage ☐ 6) Damaged condition with potential for significant disturbance damage ☐ 7) Significant damage with potential for any disturbance

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:

State: Arizona

Exp Date: December 12, 2025

Management Planner: Basilio Marcos

Certificate #: ON-4651-1419-061924

Signature:

State: Arizona

Exp Date: June 19, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.53	Client: Kyrene Elementary School District	Site: Kyrene Akimel A-al Middle School	Bldg #: Main
(HM) Material #: 169	Quantity of Material: 10 sq. ft.	Material in Air Plenum? Yes No	
Material Description: Tan Smooth 2' x 2' Ceiling Tile		Material Location(s): Snack Bar & Room D4	
Material Type: TSI (Circle One)		Surfacing Miscellaneous	

Physical Assessment Categories	
☐ 1) Damaged or significantly damaged TSI ACBM ☐ 2) Damaged friable surfacing ACBM ☐ 3) Significantly damaged friable surfacing ACBM ☐ 4) Damaged or significantly damaged friable misc. ACBM	☐ 5) ACBM with potential for damage ☐ 6) ACBM with potential for significant damage ☒ 7) Any remaining friable ACBM or friable suspect ACBM

Material Condition	
Damage Type: ☐ Physical ☐ Vandalism	☐ Water ☐ Vibration
☐ Air Erosion ☒ None	☐ Other
Damage Extent: ☒ Low <1% evenly; 10% locally ☐ Moderate <10% evenly; 10% - 25% locally ☐ High >10% evenly; >25% locally	
Description of Damage: None, Assumed ACBM	

Exposure Factors				
☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☐ Low ☒ Moderate ☐ High
Preventative Measures: Low Potential for Disturbance				

Hazard Classification/Assessment Categories	
☒ 1) Good condition with low potential for disturbance damage ☐ 2) Good condition with potential for disturbance damage ☐ 3) Good condition with potential for significant disturbance damage ☐ 4) Damaged condition with low potential for disturbance damage	☐ 5) Damaged condition with potential for disturbance damage ☐ 6) Damaged condition with potential for significant disturbance damage ☐ 7) Significant damage with potential for any disturbance

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Basilio Marcos

Certificate #: ON-4651-1419-061924

Signature:



State: Arizona

Exp Date: June 19, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.53	Client: Kyrene Elementary School District	Site: Kyrene Akimel A-al Middle School	Bldg #: Main
-----------------------------	--	---	---------------------

(HM) Material #: 171	Quantity of Material: 1,900 sq. ft.	Material in Air Plenum? Yes No
Material Description: White Smooth 2' x 4' Ceiling Tile		
Material Location(s): Kitchen		
Material Type: TSI (Circle One)	Surfacing	Miscellaneous

Physical Assessment Categories	
☐ 1) Damaged or significantly damaged TSI ACBM ☐ 2) Damaged friable surfacing ACBM ☐ 3) Significantly damaged friable surfacing ACBM ☐ 4) Damaged or significantly damaged friable misc. ACBM	☐ 5) ACBM with potential for damage ☐ 6) ACBM with potential for significant damage ☒ 7) Any remaining friable ACBM or friable suspect ACBM

Material Condition	
Damage Type: ☐ Physical ☐ Vandalism	☐ Water ☐ Vibration ☒ Air Erosion ☐ None ☐ Other
Damage Extent: ■ Low <1% evenly; 10% locally ☐ Moderate <10% evenly; 10% - 25% locally ☐ High >10% evenly; >25% locally	
Description of Damage: None, Assumed ACBM	

Exposure Factors				
☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☐ Low ☒ Moderate ☐ High
Accessibility:	Occupancy:	Potential for Contact:	Potential for Vibration:	Potential for Air Erosion:
Preventative Measures: Low Potential for Disturbance				

Hazard Classification/Assessment Categories	
☒ 1) Good condition with low potential for disturbance damage ☐ 2) Good condition with potential for disturbance damage ☐ 3) Good condition with potential for significant disturbance damage ☐ 4) Damaged condition with low potential for disturbance damage	☐ 5) Damaged condition with potential for disturbance damage ☐ 6) Damaged condition with potential for significant disturbance damage ☐ 7) Significant damage with potential for any disturbance

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:



State: Arizona

Exp Date: December 12, 2025

Management Planner: Basilio Marcos

Certificate #: ON-4651-1419-061924

Signature:



State: Arizona

Exp Date: June 19, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.53	Client: Kyrene Elementary School District	Site: Kyrene Akimel A-al Middle School	Bldg #: Main
(HM) Material #: 183	Quantity of Material: 550 sq. ft.	Material in Air Plenum? Yes No	
Material Description: 2' x 4' Ceiling Tile w/ Pin Holes		Material Location(s): Band Room	
Material Type: TSI Surfacing Miscellaneous			
(Circle One)			

Physical Assessment Categories	
☐ 1) Damaged or significantly damaged TSI ACBM ☐ 2) Damaged friable surfacing ACBM ☐ 3) Significantly damaged friable surfacing ACBM ☐ 4) Damaged or significantly damaged friable misc. ACBM	☐ 5) ACBM with potential for damage ☐ 6) ACBM with potential for significant damage ☒ 7) Any remaining friable ACBM or friable suspect ACBM

Material Condition	
Damage Type: ☐ Physical ☐ Water ☐ Vandalism ☐ Vibration	☐ Air Erosion ☐ Other ☒ None
Damage Extent: ☒ Low <1% evenly; 10% locally ☐ Moderate <10% evenly; 10% - 25% locally ☐ High >10% evenly; >25% locally	
Description of Damage: None, Assumed ACBM	

Exposure Factors				
☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☒ Low ☐ Moderate ☐ High	☐ Low ☒ Moderate ☐ High
Preventative Measures: Low Potential for Disturbance				

Hazard Classification/Assessment Categories	
☒ 1) Good condition with low potential for disturbance damage ☐ 2) Good condition with potential for disturbance damage ☐ 3) Good condition with potential for significant disturbance damage ☐ 4) Damaged condition with low potential for disturbance damage	☐ 5) Damaged condition with potential for disturbance damage ☐ 6) Damaged condition with potential for significant disturbance damage ☐ 7) Significant damage with potential for any disturbance

Inspector: Isai Portillo

Certificate #: ON-188748-19438-121224

Signature:

State: Arizona

Exp Date: December 12, 2025

Management Planner: Basilio Marcos

Certificate #: ON-4651-1419-061924

Signature:

State: Arizona

Exp Date: June 19, 2025

SECTION 9



LABORATORY REPORTS

Report for:

Isai Portillo
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Built Environment Testing West, LLC
Project: AZ1418.53; Akime A-al Middle School - Gym - Multi Purpose
EML ID: 4022499

Approved by:

Dates of Analysis:
Asbestos PLM: 04-11-2025



Approved Signatory
Carlos Rivadeneyra

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500034-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Built Environment Testing West, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akime A-al Middle School - Gym -
Multi Purpose

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Total Samples Submitted: 15

Total Samples Analyzed: 15

Total Samples with Layer Asbestos Content > 1%: 0

Location: PLM-1, White/Gray Specs 12"x12" VCT & Mastic

Lab ID-Version‡: 20025304-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Black Mastic	ND
Composite Non-Asbestos Content:	2% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-2, White/Gray Specs 12"x12" VCT & Mastic

Lab ID-Version‡: 20025305-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Black Mastic	ND
Composite Non-Asbestos Content:	2% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-3, White/Gray Specs 12"x12" VCT & Mastic

Lab ID-Version‡: 20025306-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Black Mastic	ND
Composite Non-Asbestos Content:	2% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-4, White w/Black Specs 12"x12" VCT & Mastic

Lab ID-Version‡: 20025307-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	2% Cellulose
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akime A-al Middle School - Gym -
Multi Purpose

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-5, White w/Black Specs 12"x12" VCT & Mastic

Lab ID-Version‡: 20025308-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	2% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-6, White w/Black Specs 12"x12" VCT & Mastic

Lab ID-Version‡: 20025309-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	2% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Black w/White Specs 12"x12" VCT & Mastic

Lab ID-Version‡: 20025310-1

Sample Layers	Asbestos Content
Black Floor Tile	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	2% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-8, Black w/White Specs 12"x12" VCT & Mastic

Lab ID-Version‡: 20025311-1

Sample Layers	Asbestos Content
Black Floor Tile	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	2% Cellulose
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akime A-al Middle School - Gym -
Multi Purpose

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-9, Black w/White Specs 12"x12" VCT & Mastic

Lab ID-Version‡: 20025312-1

Sample Layers	Asbestos Content
Black Floor Tile	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	2% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-10, White 2"x2" Ceiling Tile

Lab ID-Version‡: 20025313-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-11, White 2"x2" Ceiling Tile

Lab ID-Version‡: 20025314-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-12, White 2"x2" Ceiling Tile

Lab ID-Version‡: 20025315-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akime A-al Middle School - Gym -
Multi Purpose

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-13, Gray/Blue Square Carpet & Mastic

Lab ID-Version‡: 20025316-1

Sample Layers	Asbestos Content
Gray Carpet	ND
Green Mastic	ND
Composite Non-Asbestos Content:	30% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-14, Gray/Blue Square Carpet & Mastic

Lab ID-Version‡: 20025317-1

Sample Layers	Asbestos Content
Gray Carpet	ND
Green Mastic	ND
Composite Non-Asbestos Content:	30% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-15, Gray/Blue Square Carpet & Mastic

Lab ID-Version‡: 20025318-1

Sample Layers	Asbestos Content
Gray Carpet	ND
Green Mastic	ND
Composite Non-Asbestos Content:	30% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Built Environment Testing West, LLC
9445 Farnham Street, Suite 103, San Diego, CA 92123
(833) 465-5857 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akime A-al Middle School - Gym -
Multi Purpose

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Carlos Rivadeneyra

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".



Built Environment Testing

East: (866) 871-1984
Central: (800) 651-4802
West: (866) 888-6653

[illegible]

SAMPLE TYPE CODES		RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
A - Air	W - Wipe		2/11/25		4/9/25
B - Bulk	T - Tape				
D - Dust	R - Rock				
SO - Soil	O - Other.				

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at: <https://www.usdoj.gov/office-of-the-attorney-general/policy-statement-on-the-use-of-dna-evidence>

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at: <https://www.eurofinsus.com/environment-testing/built-environment/resources/sampling-guides-and-forms>

Copyright © 2022 Eurofins EPC Built Environment Testing Ltd.

ASE

REQUÈS



004022499

PCM Air		Bulk	Rock & Soil	Other Requests
Fiber Count (NIOSH 7400)				
OSHA with TWA				
Asbestos Bulk PLM				
EPA Point Count (200 Point Count)				
EPA Point Count (400 Point Count)				
EPA Point Count (1000 Point Count)				
Gravimetric Point Count (400 Pt Count)				
Gravimetric Point Count (1000 Pt Count)				
CARB 435 Method (400 Point Count)				
CARB 435 Method (1000 Point Count)				
Lead Analysis - Flame AA				

Report for:

Isai Portillo
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Built Environment Testing West, LLC
Project: AZ1418.53; Akimel A-al Middle School
EML ID: 4022496

Approved by:

Dates of Analysis:
Asbestos PLM: 04-11-2025



Approved Signatory
Carlos Rivadeneyra

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500034-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Built Environment Testing West, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akimel A-al Middle School

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Total Samples Submitted: 15

Total Samples Analyzed: 15

Total Samples with Layer Asbestos Content > 1%: 0

Location: PLM-1, Orange Peel DW (pt, txt, tp, jc & dw)

Lab ID-Version‡: 20025128-1

Sample Layers	Asbestos Content
White Texture with Paint	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-2, Orange Peel DW (pt, txt, tp, jc & dw)

Lab ID-Version‡: 20025129-1

Sample Layers	Asbestos Content
White Texture with Paint	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-3, Orange Peel DW (pt, txt, tp, jc & dw)

Lab ID-Version‡: 20025130-1

Sample Layers	Asbestos Content
White Texture with Paint	ND
White Joint Compound with Paint	ND
Yellow Tape (Mesh)	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akimel A-al Middle School

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-4, White w/Gray Specs 12'x12" VCT & Mastic

Lab ID-Version‡: 20025131-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Black Mastic	ND
Sample Composite Homogeneity: Moderate	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akimel A-al Middle School

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-5, White w/Gray Specs 12'x12" VCT & Mastic

Lab ID-Version‡: 20025132-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Black Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-6, White w/Gray Specs 12'x12" VCT & Mastic

Lab ID-Version‡: 20025133-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Black Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Gray/Blue Square Carpet & Mastic

Lab ID-Version‡: 20025134-1

Sample Layers	Asbestos Content
Blue Carpet	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-8, Gray/Blue Square Carpet & Mastic

Lab ID-Version‡: 20025135-1

Sample Layers	Asbestos Content
Blue Carpet	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akimel A-al Middle School

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-9, Gray/Blue Square Carpet & Mastic

Lab ID-Version‡: 20025136-1

Sample Layers	Asbestos Content
Blue Carpet	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-10, Blue Cove Base & Mastic

Lab ID-Version‡: 20025137-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Blue Cove Base & Mastic

Lab ID-Version‡: 20025138-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Blue Cove Base & Mastic

Lab ID-Version‡: 20025139-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akimel A-al Middle School

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-13, White 2'x2' Ceiling Tile

Lab ID-Version‡: 20025140-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-14, White 2'x2' Ceiling Tile

Lab ID-Version‡: 20025141-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-15, White 2'x2' Ceiling Tile

Lab ID-Version‡: 20025142-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Built Environment Testing West, LLC
9445 Farnham Street, Suite 103, San Diego, CA 92123
(833) 465-5857 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akimel A-al Middle School

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Chloe Solomua

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Built Environment Testing

ASE



004022496

REQUESTED SERVICES (CHECK BOXES BELOW)

[illegible]

PCM Air		PLM Bulk										Rock & Soil		Other Requests	
Fiber Count (NIOSH 7400)	OSHA with TWA	Asbestos Bulk PLM	EPA Point Count (200 Point Count)	EPA Point Count (400 Point Count)	EPA Point Count (1000 Point Count)	Gravimetric Point Count (400 Pt Count)	Gravimetric Point Count (1000 Pt Count)	CARB 435 Method (400 Point Count)	CARB 435 Method (1000 Point Count)	Lead Analysis - Flame AA					
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
☐	☐														

SAMPLE TYPE CODES		RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
A - Air	W - Wipe		2/11/25		4/9/25
B - Bulk	T - Tape				
D - Dust	R - Rock				
SO - Soil	O - Other:				

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at: <https://www.eurofinsus.com/environment-testing/built-environment>

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at: <https://www.eurofinsus.com/environment-testing/built-environment/resources/sampling-guides-and-forms/>

Copyright © 2022 European EPB Built Environment Ltd. All rights reserved.

Report for:

Isai Portillo
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Built Environment Testing West, LLC
Project: AZ1418.53; Akimel A-a1 Middle School
EML ID: 4022509

Approved by:

Dates of Analysis:
Asbestos PLM: 04-11-2025



Approved Signatory
Carlos Rivadeneyra

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500034-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Built Environment Testing West, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akimel A-a1 Middle School

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Total Samples Submitted: 15

Total Samples Analyzed: 15

Total Samples with Layer Asbestos Content > 1%: 0

Location: PLM-1, White 2"x2" Ceiling Tile

Lab ID-Version‡: 20024707-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-2, White 2"x2" Ceiling Tile

Lab ID-Version‡: 20024708-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-3, White 2"x2" Ceiling Tile

Lab ID-Version‡: 20024709-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-4, Gray/Blue Square Carpet & Mastic

Lab ID-Version‡: 20024710-1

Sample Layers	Asbestos Content
Blue Carpet	ND
Beige Mastic	ND
Composite Non-Asbestos Content:	20% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akimel A-a1 Middle School

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-5, Gray/Blue Square Carpet & Mastic

Lab ID-Version‡: 20024711-1

Sample Layers	Asbestos Content
Blue Carpet	ND
Beige Mastic	ND
Composite Non-Asbestos Content:	20% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-6, Gray/Blue Square Carpet & Mastic

Lab ID-Version‡: 20024712-1

Sample Layers	Asbestos Content
Blue Carpet	ND
Beige Mastic	ND
Composite Non-Asbestos Content:	20% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Blue 4" Cove Base & Mastic

Lab ID-Version‡: 20024713-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-8, Blue 4" Cove Base & Mastic

Lab ID-Version‡: 20024714-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akimel A-a1 Middle School

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-9, Blue 4" Cove Base & Mastic

Lab ID-Version‡: 20024715-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-10, Beige Wallpaper DW

Lab ID-Version‡: 20024716-1

Sample Layers	Asbestos Content
Beige Wallpaper	ND
White Compound	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	5% Cellulose 5% Synthetic Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-11, Beige Wallpaper DW

Lab ID-Version‡: 20024717-1

Sample Layers	Asbestos Content
Beige Wallpaper	ND
White Compound	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	5% Cellulose 5% Synthetic Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akimel A-a1 Middle School

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-12, Beige Wallpaper DW

Lab ID-Version‡: 20024718-1

Sample Layers	Asbestos Content
Beige Wallpaper	ND
White Compound	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	5% Cellulose 5% Synthetic Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akimel A-a1 Middle School

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-13, Untexture Drywall

Lab ID-Version‡: 20024719-1

Sample Layers	Asbestos Content
White Compound	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-14, Untexture Drywall

Lab ID-Version‡: 20024720-1

Sample Layers	Asbestos Content
White Compound	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-15, Untexture Drywall

Lab ID-Version‡: 20024721-1

Sample Layers	Asbestos Content
White Compound	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Built Environment Testing West, LLC
9445 Farnham Street, Suite 103, San Diego, CA 92123
(833) 465-5857 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akimel A-a1 Middle School

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Carlos Rivadeneyra

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

SAMPLE TYPE CODES		RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
A - Air	W - Wipe		2/11/25		4/9/25
B - Bulk	T - Tape				
D - Dust	R - Rock				
SO - Soil	O - Other:				

By submitting this Chain of Custody, you agree to be bound by the terms and conditions of the "Standard Operating Procedures" for the collection, handling, and analysis of evidence.

ASBESTOS		ANALYSIS	
REQUEST		004022509	
PCM Air	Bulk	Tests	
Fiber Count (NIOSH 7400)		☐	☐
OSHA with TWA		☐	☐
Asbestos Bulk PLM		☐	☐
EPA Point Count (200 Point Count)		☐	☐
EPA Point Count (400 Point Count)		☐	☐
EPA Point Count (1000 Point Count)		☐	☐
Gravimetric Point Count (400 Pt Count)		☐	☐
Gravimetric Point Count (1000 Pt Count)		☐	☐
CARB 435 Method (400 Point Count)		☐	☐
CARB 435 Method (1000 Point Count)		☐	☐
Lead Analysis - Flame AA		☐	☐

Report for:

Isai Portillo
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Built Environment Testing West, LLC
Project: AZ1418.53; Akimel A1 Middle School 2nd Level Classrooms
EML ID: 4022516

Approved by:

Dates of Analysis:
Asbestos PLM: 04-11-2025



Approved Signatory
Carlos Rivadeneyra

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500034-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Built Environment Testing West, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akimel A1 Middle School 2nd
Level
Classrooms

Eurofins Built Environment Testing West, LLC
9445 Farnham Street, Suite 103, San Diego, CA 92123
(833) 465-5857 www.eurofinsus.com/Built
Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Total Samples Submitted: 15

Total Samples Analyzed: 15

Total Samples with Layer Asbestos Content > 1%: 0

Location: PLM-1, Orange Peel Drywall (pt,tet,tp,jc,DW)

Lab ID-Version‡: 20024866-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-2, Orange Peel Drywall (pt,tet,tp,jc,DW)

Lab ID-Version‡: 20024867-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-3, Orange Peel Drywall (pt,tet,tp,jc,DW)

Lab ID-Version‡: 20024868-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.	Eurofins Built Environment Testing West, LLC
C/O: Isai Portillo	9445 Farnham Street, Suite 103, San Diego, CA 92123
Re: AZ1418.53; Akimel A1 Middle School 2nd	(833) 465-5857 www.eurofinsus.com/Built
Level	Date of Sampling: 02-11-2025
Classrooms	Date of Receipt: 04-09-2025
	Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-4, White w/Gray Specs 12"x12" VCT & Mastic

Lab ID-Version‡: 20024869-1

Sample Layers	Asbestos Content
Gray/White Floor Tile	ND
Brown/Black Mastic	ND
Sample Composite Homogeneity: Moderate	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
 C/O: Isai Portillo
 Re: AZ1418.53; Akimel A1 Middle School 2nd
 Level
 Classrooms

Eurofins Built Environment Testing West, LLC
 9445 Farnham Street, Suite 103, San Diego, CA 92123
 (833) 465-5857 www.eurofinsus.com/Built
 Date of Sampling: 02-11-2025
 Date of Receipt: 04-09-2025
 Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-5, White w/Gray Specs 12"x12" VCT & Mastic

Lab ID-Version‡: 20024870-1

Sample Layers	Asbestos Content
Gray/White Floor Tile	ND
Brown/Black Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM-6, White w/Gray Specs 12"x12" VCT & Mastic

Lab ID-Version‡: 20024871-1

Sample Layers	Asbestos Content
Gray/White Floor Tile	ND
Black Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM-7, Fireproofing

Lab ID-Version‡: 20024872-1

Sample Layers	Asbestos Content
Gray Fireproofing	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity: Good	

Location: PLM-8, Fireproofing

Lab ID-Version‡: 20024873-1

Sample Layers	Asbestos Content
Gray Fireproofing	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity: Good	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
 C/O: Isai Portillo
 Re: AZ1418.53; Akimel A1 Middle School 2nd
 Level
 Classrooms

Eurofins Built Environment Testing West, LLC
 9445 Farnham Street, Suite 103, San Diego, CA 92123
 (833) 465-5857 www.eurofinsus.com/Built
 Date of Sampling: 02-11-2025
 Date of Receipt: 04-09-2025
 Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-9, Fireproofing

Lab ID-Version‡: 20024874-1

Sample Layers	Asbestos Content
Gray Fireproofing	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Good

Location: PLM-10, Gray/Blue Square Carpet & Mastic

Lab ID-Version‡: 20024875-1

Sample Layers	Asbestos Content
Blue Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	30% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Gray/Blue Square Carpet & Mastic

Lab ID-Version‡: 20024876-1

Sample Layers	Asbestos Content
Blue Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	30% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Gray/Blue Square Carpet & Mastic

Lab ID-Version‡: 20024877-1

Sample Layers	Asbestos Content
Blue Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	30% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akimel A1 Middle School 2nd
Level
Classrooms

Eurofins Built Environment Testing West, LLC
9445 Farnham Street, Suite 103, San Diego, CA 92123
(833) 465-5857 www.eurofinsus.com/Built
Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-13, White 2"x2" Ceiling Tile

Lab ID-Version‡: 20024878-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-14, White 2"x2" Ceiling Tile

Lab ID-Version‡: 20024879-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-15, White 2"x2" Ceiling Tile

Lab ID-Version‡: 20024880-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akimel A1 Middle School 2nd
Level
Classrooms

Eurofins Built Environment Testing West, LLC
9445 Farnham Street, Suite 103, San Diego, CA 92123
(833) 465-5857 www.eurofinsus.com/Built

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Isai Nmr

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

East: (866) 871-1984
Central: (800) 651-4802
West: (866) 888-6653

[illegible]

ASBESTOS ANALYSIS					
REQUES					
PCM Air					
Fiber Count (NIOSH 7400)					
OSHA with TWA					
Asbestos Bulk PLM					
EPA Point Count (200 Point Count)					
EPA Point Count (400 Point Count)					
EPA Point Count (1000 Point Count)					
Gravimetric Point Count (400 Pt Count)					
Gravimetric Point Count (1000 Pt Count)					
CARB 435 Method (400 Point Count)					
CARB 435 Method (1000 Point Count)					
Lead Analysis - Flame AA					

SAMPLE TYPE CODES		RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
A - Air	W - Wipe		4/1/25		4/19/25 8:15am
B - Bulk	T - Tape				
D - Dust	R - Rock				
SO - Soil	O - Other:				

Report for:

Isai Portillo
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Built Environment Testing West, LLC
Project: AZ1418.53; Akime A-al Middle School - Concession
EML ID: 4022506

Approved by:

Dates of Analysis:
Asbestos PLM: 04-11-2025



Approved Signatory
Carlos Rivadeneyra

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500034-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Built Environment Testing West, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akime A-al Middle School -
Concession

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Total Samples Submitted: 15

Total Samples Analyzed: 15

Total Samples with Layer Asbestos Content > 1%: 0

Location: PLM-1, Orange Peel (pt, txt, tp, jc, dw)

Lab ID-Version‡: 20025254-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-2, Orange Peel (pt, txt, tp, jc, dw)

Lab ID-Version‡: 20025255-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-3, Orange Peel (pt, txt, tp, jc, dw)

Lab ID-Version‡: 20025256-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akime A-al Middle School -
Concession

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-4, Smooth DW (pt, txt, tp, jc & dw)

Lab ID-Version‡: 20025257-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akime A-al Middle School -
Concession

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-5, Smooth DW (pt, txt, tp, jc & dw)

Lab ID-Version‡: 20025258-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-6, Smooth DW (pt, txt, tp, jc & dw)

Lab ID-Version‡: 20025259-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-7, Blue 4" Cove Base & Mastic

Lab ID-Version‡: 20025260-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akime A-al Middle School -
Concession

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-8, Blue 4" Cove Base & Mastic

Lab ID-Version‡: 20025261-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akime A-al Middle School -
Concession

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-9, Blue 4" Cove Base & Mastic

Lab ID-Version‡: 20025262-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Yellow Mastic	ND
Sample Composite Homogeneity: Moderate	

Location: PLM-10, Concrete Foundation w/Gray Coating

Lab ID-Version‡: 20025263-1

Sample Layers	Asbestos Content
Gray Coating	ND
Gray Concrete	ND
Sample Composite Homogeneity: Moderate	

Location: PLM-11, Concrete Foundation w/Gray Coating

Lab ID-Version‡: 20025264-1

Sample Layers	Asbestos Content
Gray Coating	ND
Gray Concrete	ND
Sample Composite Homogeneity: Moderate	

Location: PLM-12, Concrete Foundation w/Gray Coating

Lab ID-Version‡: 20025265-1

Sample Layers	Asbestos Content
Gray Coating	ND
Gray Concrete	ND
Sample Composite Homogeneity: Moderate	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akime A-al Middle School -
Concession

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

Location: PLM-13, Brick & Mortar

Lab ID-Version‡: 20025266-1

Sample Layers	Asbestos Content
Tan Brick	ND
Brown Mortar	ND
Sample Composite Homogeneity: Moderate	

Location: PLM-14, Brick & Mortar

Lab ID-Version‡: 20025267-1

Sample Layers	Asbestos Content
Tan Brick	ND
Brown Mortar	ND
Sample Composite Homogeneity: Moderate	

Location: PLM-15, Brick & Mortar

Lab ID-Version‡: 20025268-1

Sample Layers	Asbestos Content
Tan Brick	ND
Brown Mortar	ND
Sample Composite Homogeneity: Moderate	

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Built Environment Testing West, LLC
9445 Farnham Street, Suite 103, San Diego, CA 92123
(833) 465-5857 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Isai Portillo
Re: AZ1418.53; Akime A-al Middle School -
Concession

Date of Sampling: 02-11-2025
Date of Receipt: 04-09-2025
Date of Report: 04-11-2025

ASBESTOS PLM REPORT

PROJECT ANALYSTS AND SIGNATORY REPORT

Project Analysts



Analyst: Claire Bartlett




Analyst: Isra Nmr

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by "-x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Built Environment Testing

East: (866) 871-1984
Central: (800) 651-4802
West: (866) 888-6653

SAMPLE TYPE CODES		RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
A - Air	W - Wipe		2/11/25		4/9/25
B - Bulk	T - Tape				
D - Dust	R - Rock				
SO - Soil	O - Other:				



By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at: <https://www.eurofins.com/chain-of-custody>

ASBE										
REQUEST										
PCM Air		PLM						Rock or Soil		
		Bulk								
Fiber Count (NIOSH 7400)	OSHA with TWA	Asbestos Bulk PLM	EPA-Point Count (200 Point Count)	EPA Point Count (400 Point Count)	EPA Point Count (1000 Point Count)	Gravimetric Point Count (400 Pt Count)	Gravimetric Point Count (1000 Pt Count)	CARB 435 Method (400 Point Count)	CARB 435 Method (1000 Point Count)	Lead Analysis - Flame AA
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
☐	☐	☐	☐							

SECTION 10



ASSUMED ACBM LOCATION MAPS

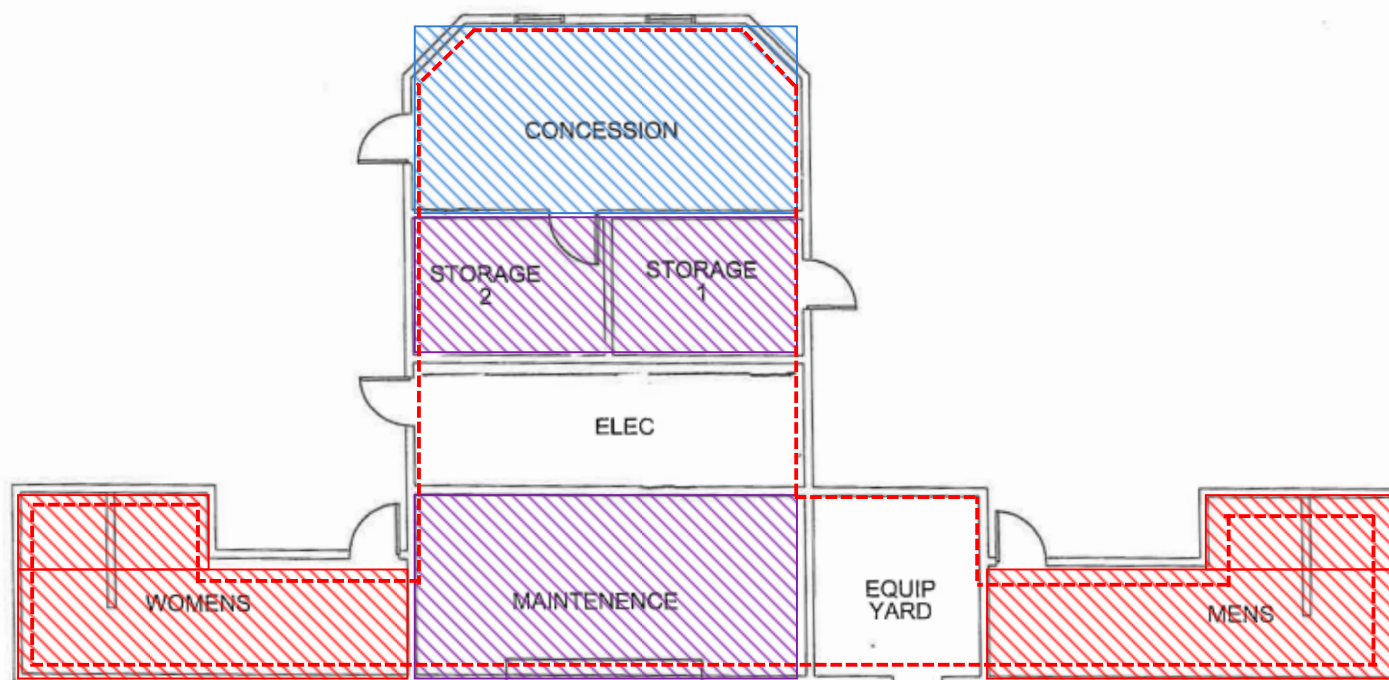

Assumed-Asbestos Containing



Fixture Caulking,
Tan 2" x 2" Ceramic Floor Tile & Grout,
Tan w/White Specs 2" x 2" Ceramic
Floor Tile & Grout,
Tan w/White Specs 1" x 2" Ceramic
Floor Tile & Grout
White 4" x 4" Ceramic Cove Base Tile,
Black 2" x 2" Ceramic Wall Tile & Grout,
& Beige 2' x 2" Ceramic Wall Tile & Grout



**Assumed-Asbestos Containing
Counter Caulking**



**Assumed-Asbestos Containing
Interior Frame Caulking**





**Assumed-Asbestos Containing
Brown 16" x 8" CMU & Mortar
& Brown 16" x 4" CMU & Mortar**

Assumed Asbestos-Containing Material Map (1)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Concession Building

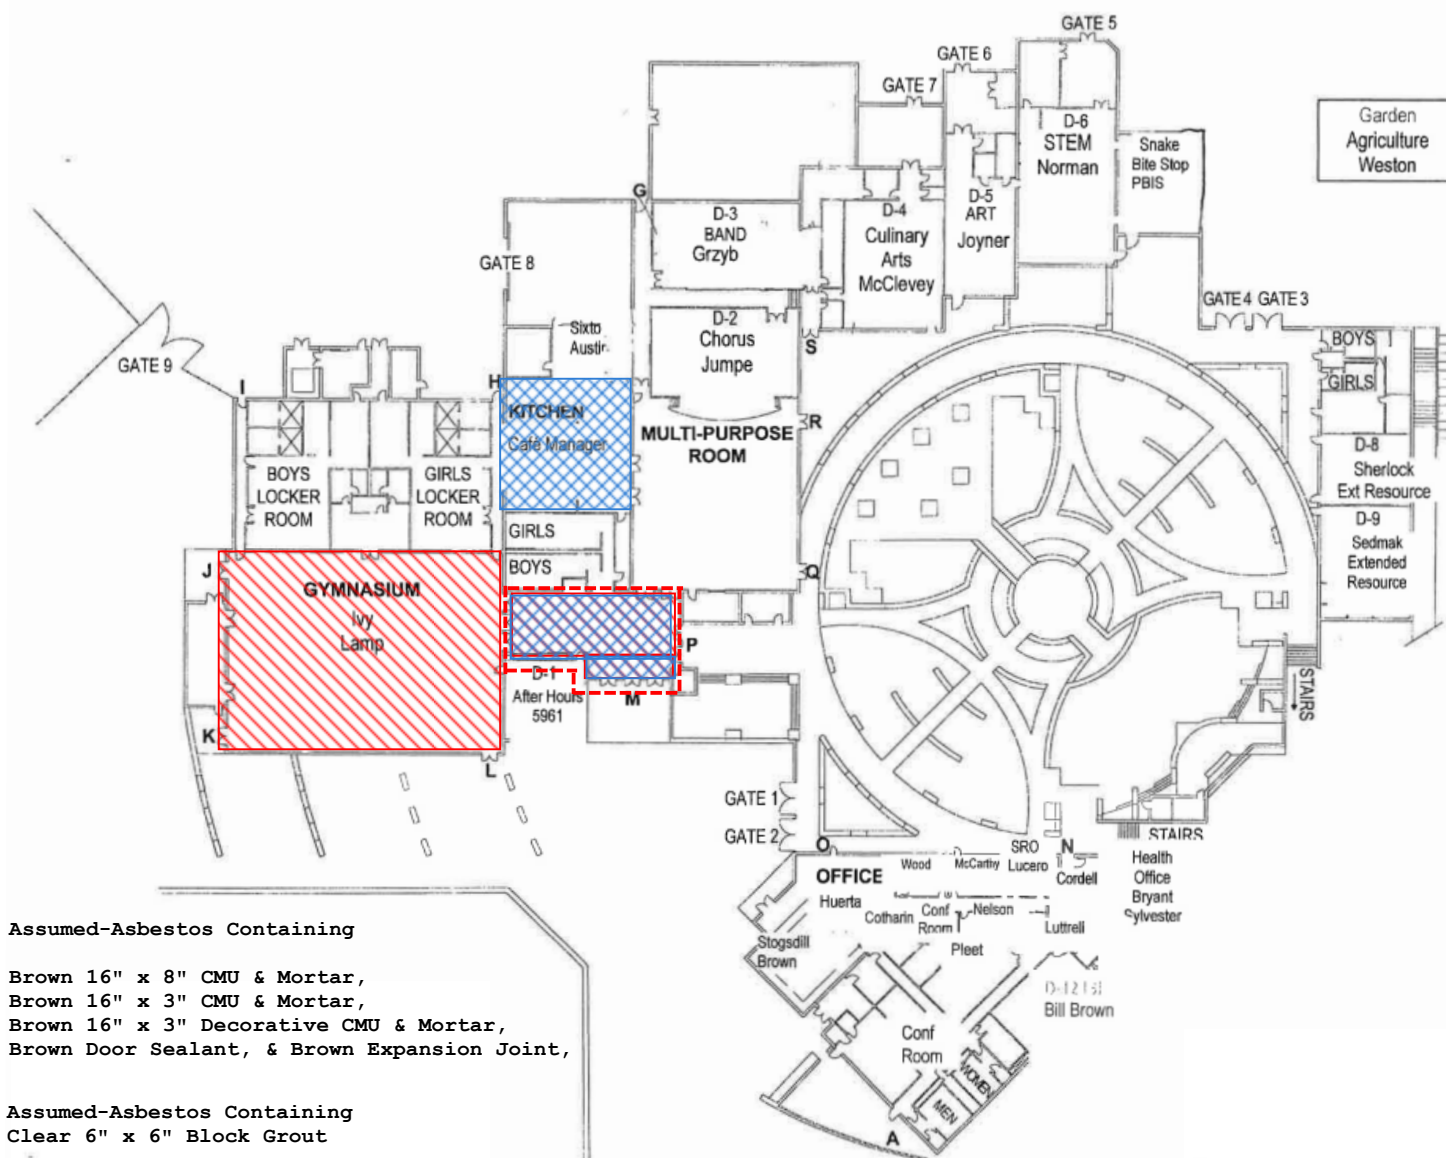



Assumed Asbestos-Containing Material Map (2)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Lower Level

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

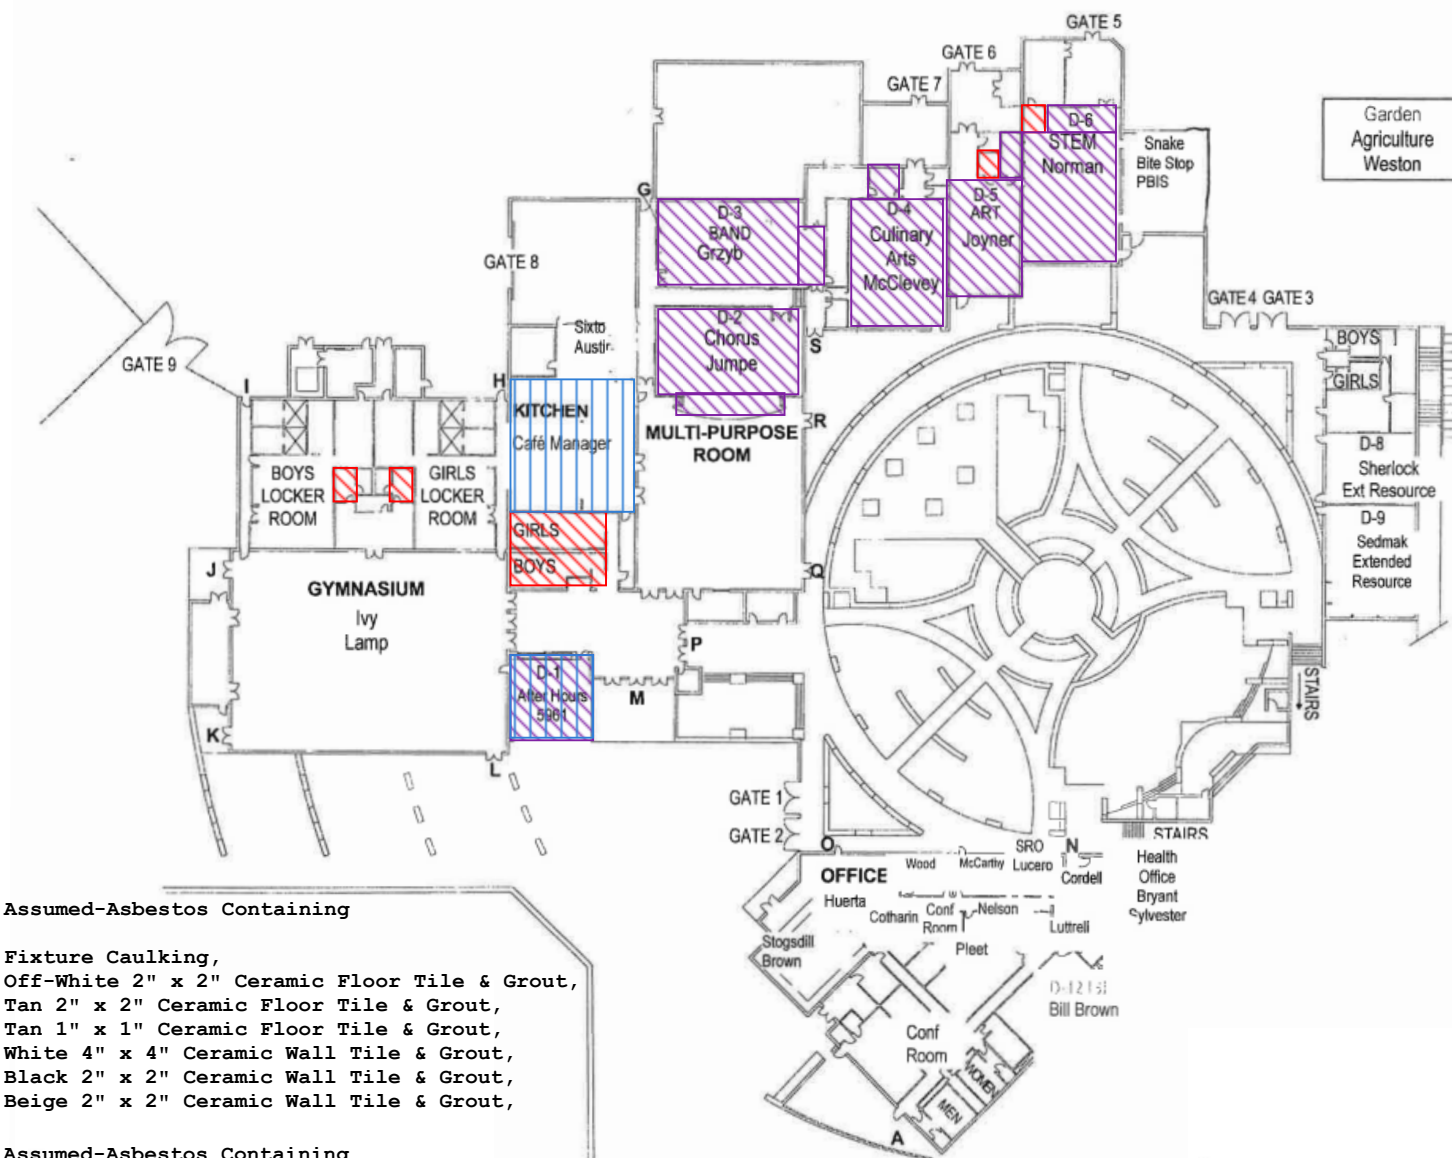



Assumed Asbestos-Containing Material Map (3)
 Kyrene Akimel A-al Middle School
 2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Lower Level

Dominion Environmental Consultants, Inc.
 20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

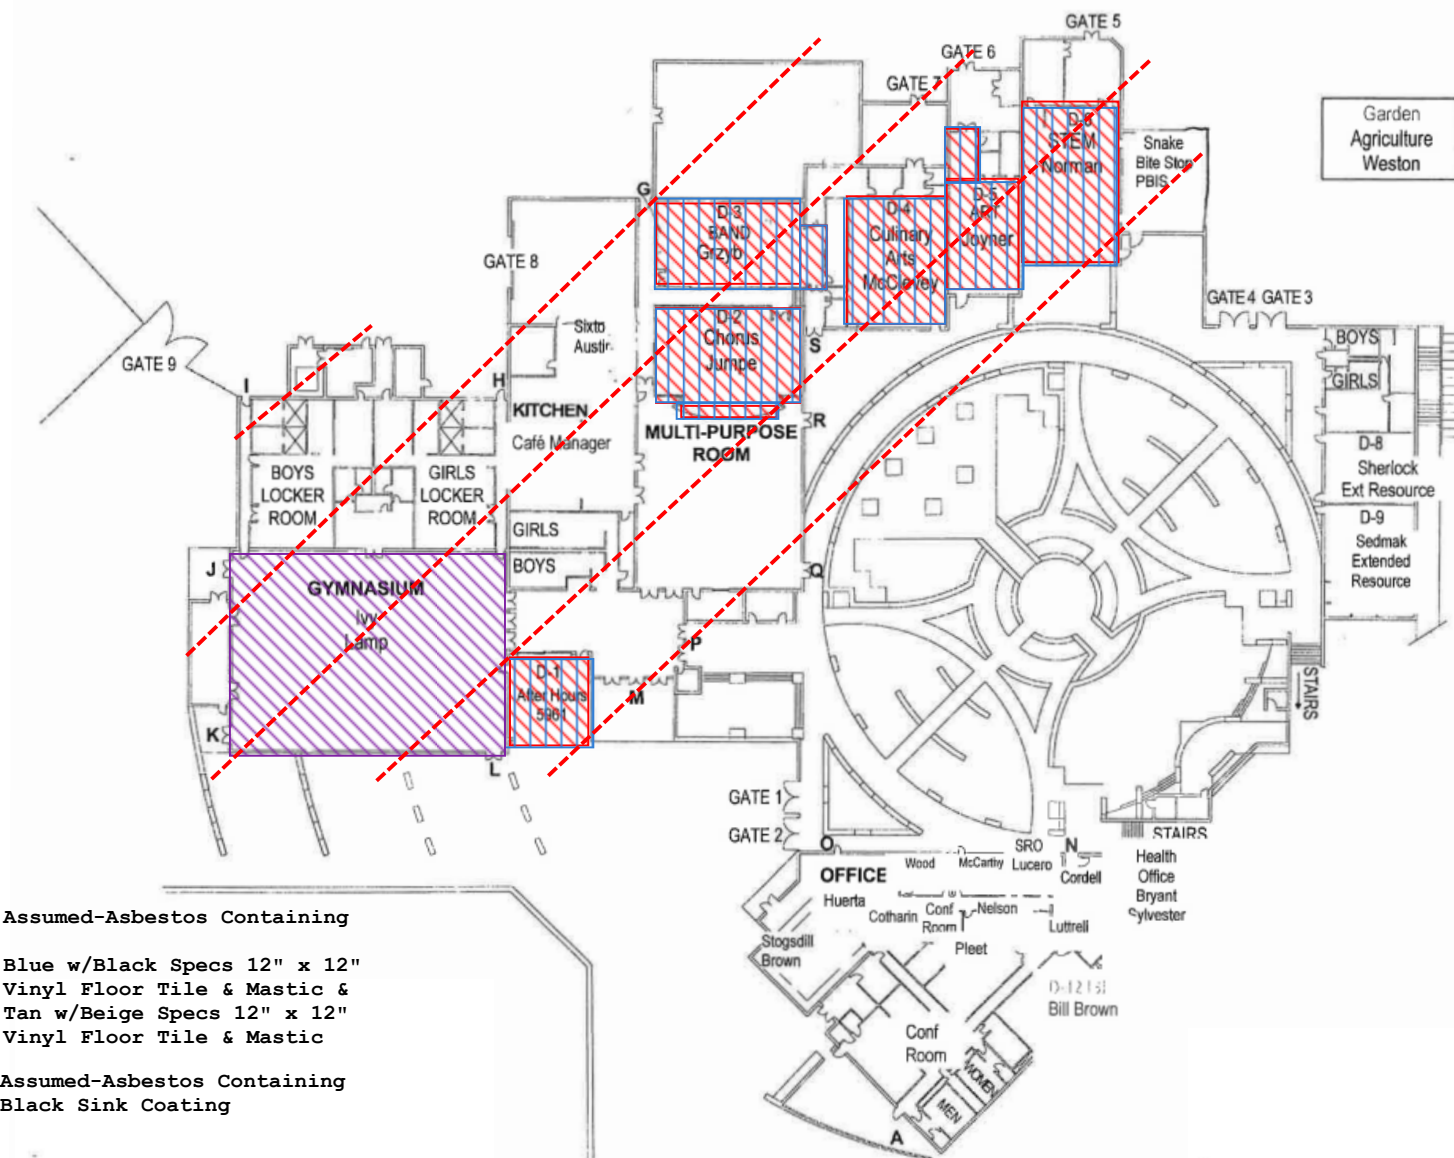

Assumed-Asbestos Containing



Blue w/Black Specs 12" x 12"
Vinyl Floor Tile & Mastic &
Tan w/Beige Specs 12" x 12"
Vinyl Floor Tile & Mastic



Assumed-Asbestos Containing
Black Sink Coating



Assumed-Asbestos Containing
2" x 2" Replacement Ceiling Tile





Assumed-Asbestos Containing
Black L-Shaped Cove Base

Assumed Asbestos-Containing Material Map (4)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53



Main Building - Lower Level

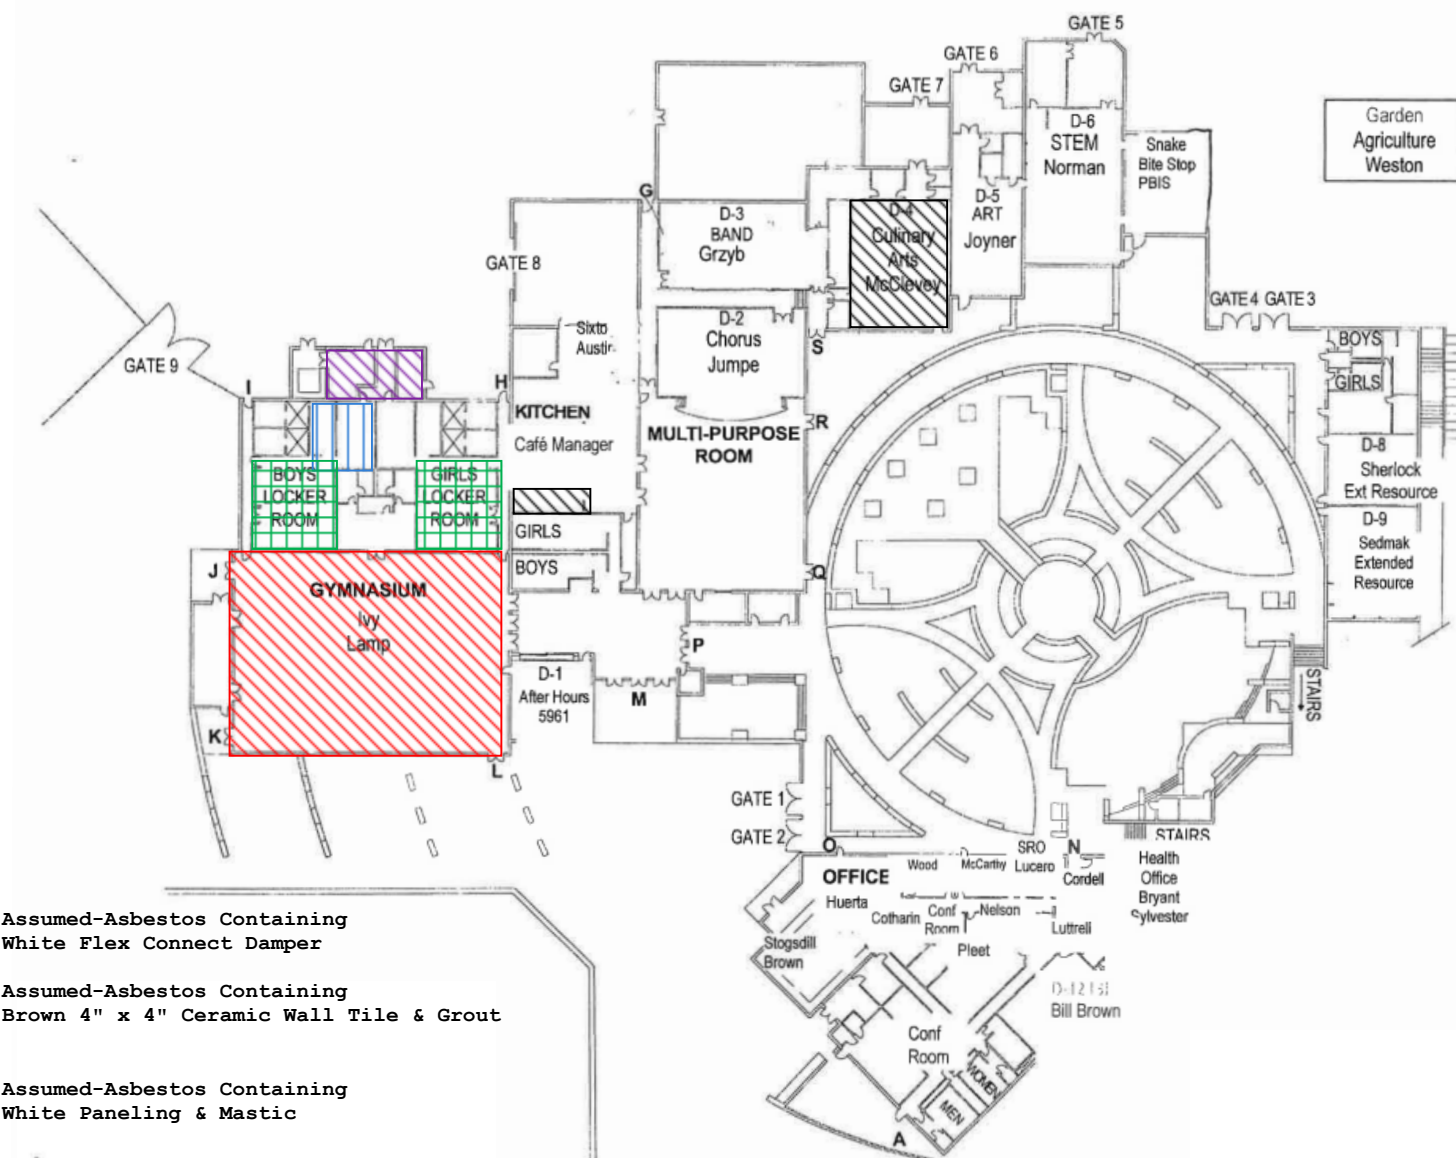

Assumed Asbestos-Containing Material Map (5)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Lower Level

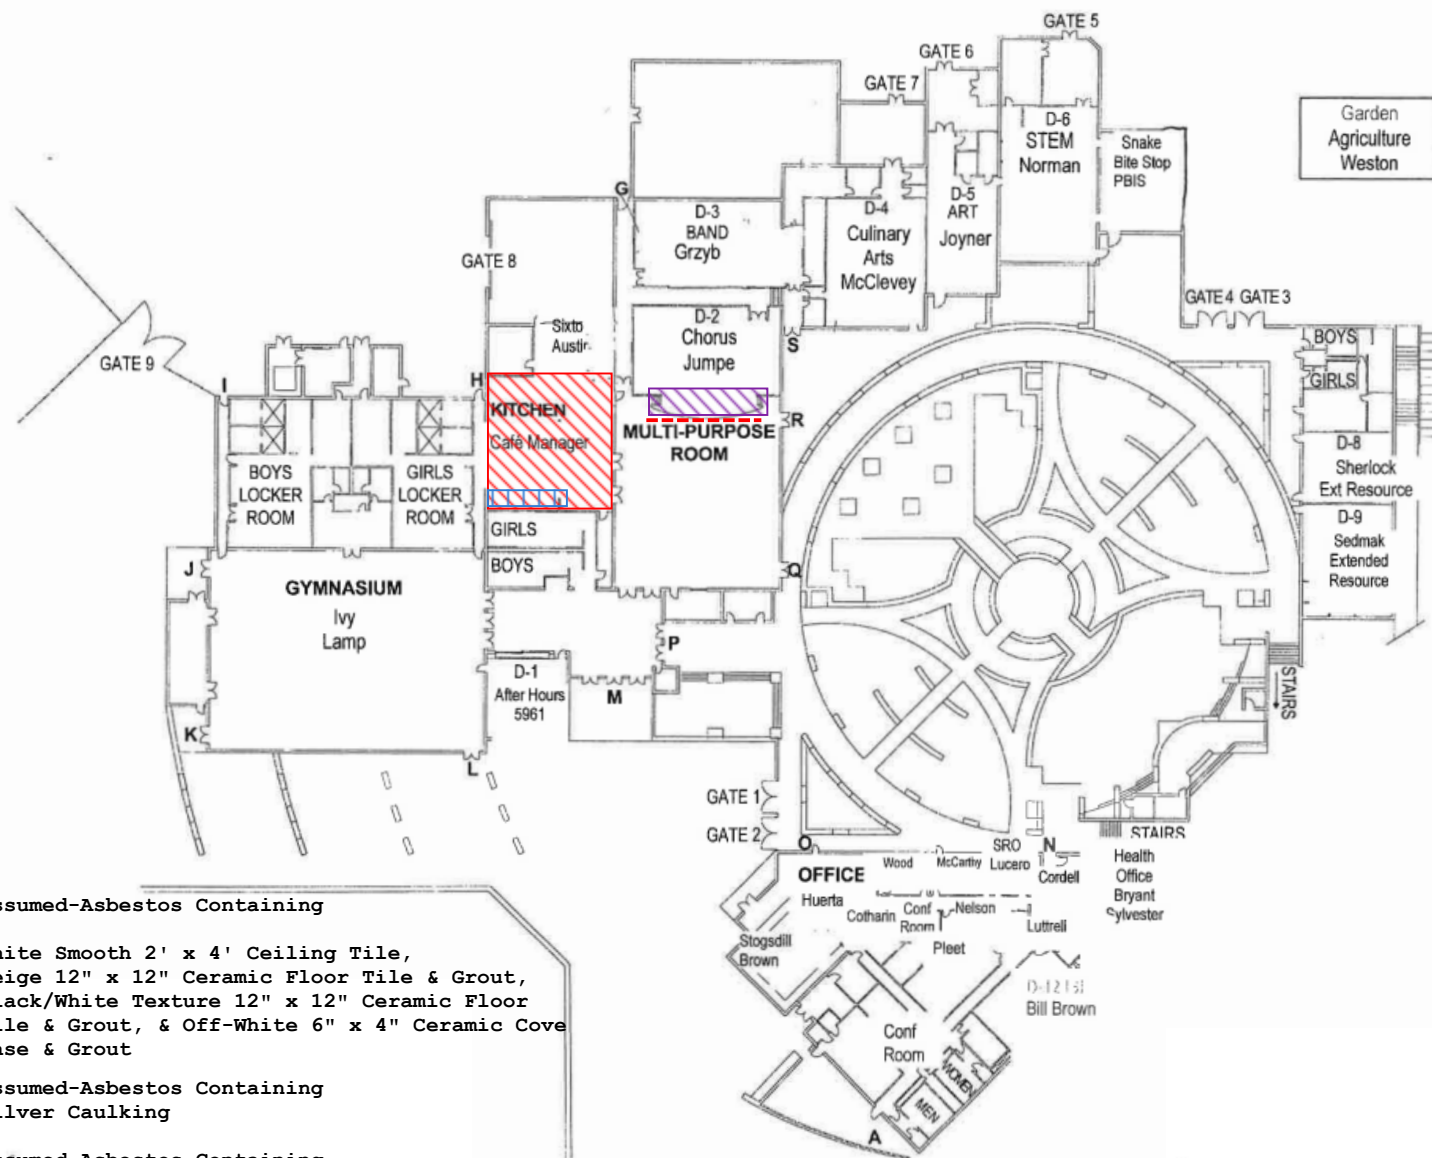

Assumed-Asbestos Containing



White Smooth 2' x 4' Ceiling Tile,
Beige 12" x 12" Ceramic Floor Tile & Grout,
Black/White Texture 12" x 12" Ceramic Floor
Tile & Grout, & Off-White 6" x 4" Ceramic Cove
Base & Grout



Assumed-Asbestos Containing
Silver Caulking



Assumed-Asbestos Containing
Black w/White Specs 12" x 12" Vinyl Floor Tile
& Mastic





Assumed-Asbestos Containing
Blue 54" x 12" Vinyl w/Circle Pattern & Mastic

Assumed Asbestos-Containing Material Map (6)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Lower Level

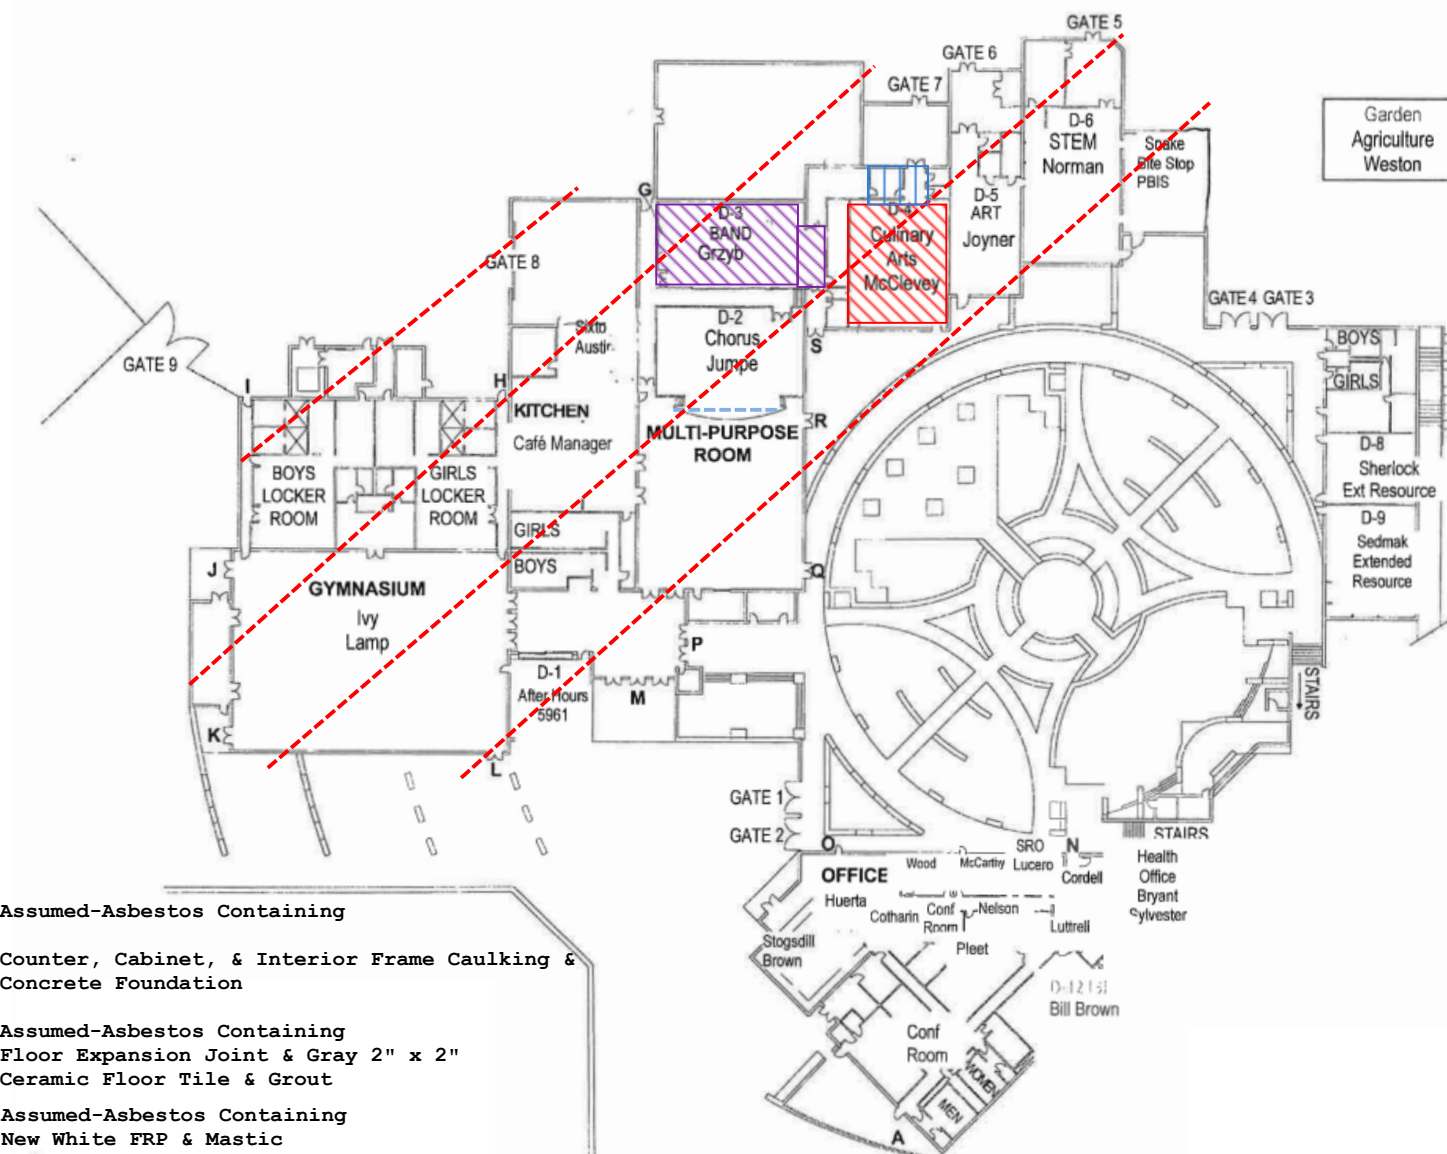

Assumed-Asbestos Containing

Counter, Cabinet, & Interior Frame Caulking & Concrete Foundation



Assumed-Asbestos Containing Floor Expansion Joint & Gray 2" x 2" Ceramic Floor Tile & Grout



Assumed-Asbestos Containing New White FRP & Mastic



Assumed-Asbestos Containing 2' x 4' Ceiling Tile w/ Pinholes





Assumed-Asbestos Containing Gray Sink Caulking

Assumed Asbestos-Containing Material Map (7)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Lower Level

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

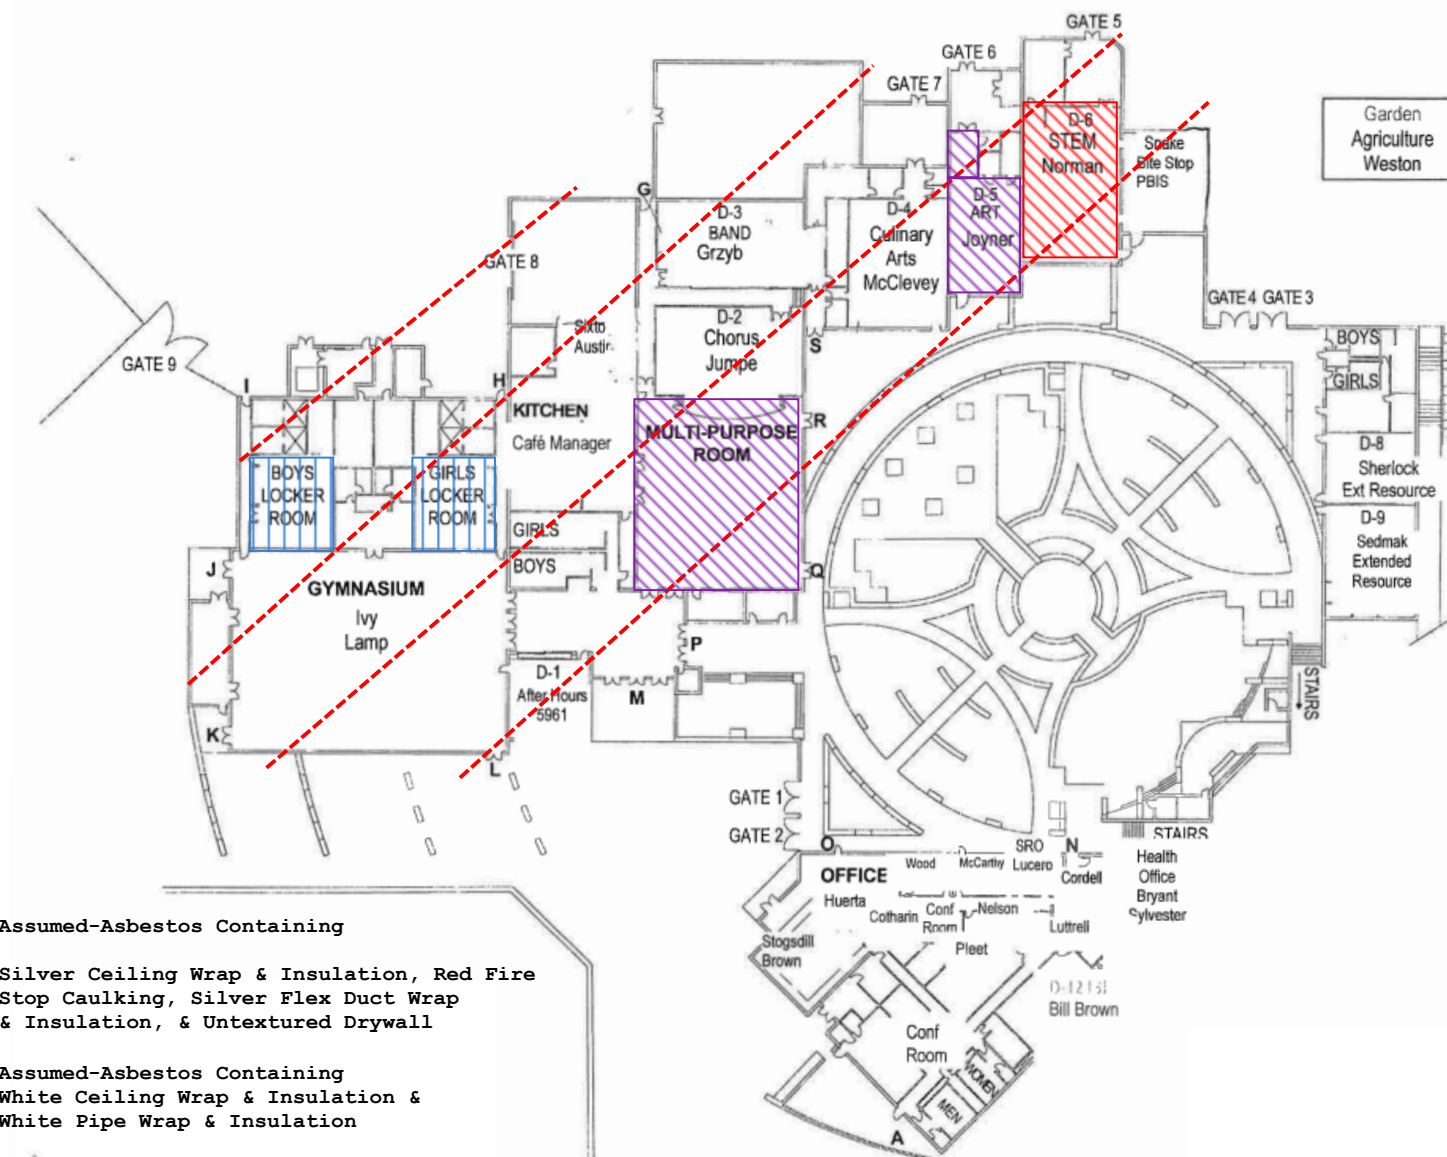

Assumed-Asbestos Containing

Silver Ceiling Wrap & Insulation, Red Fire Stop Caulking, Silver Flex Duct Wrap & Insulation, & Untextured Drywall



Assumed-Asbestos Containing White Ceiling Wrap & Insulation & White Pipe Wrap & Insulation



Assumed-Asbestos Containing White w/Black Specs 12" x 12" Vinyl Floor Tile & Mastic





Assumed-Asbestos Containing Ceiling Plaster

Assumed Asbestos-Containing Material Map (8)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048



Project No. AZ1418.53

Main Building - Lower Level

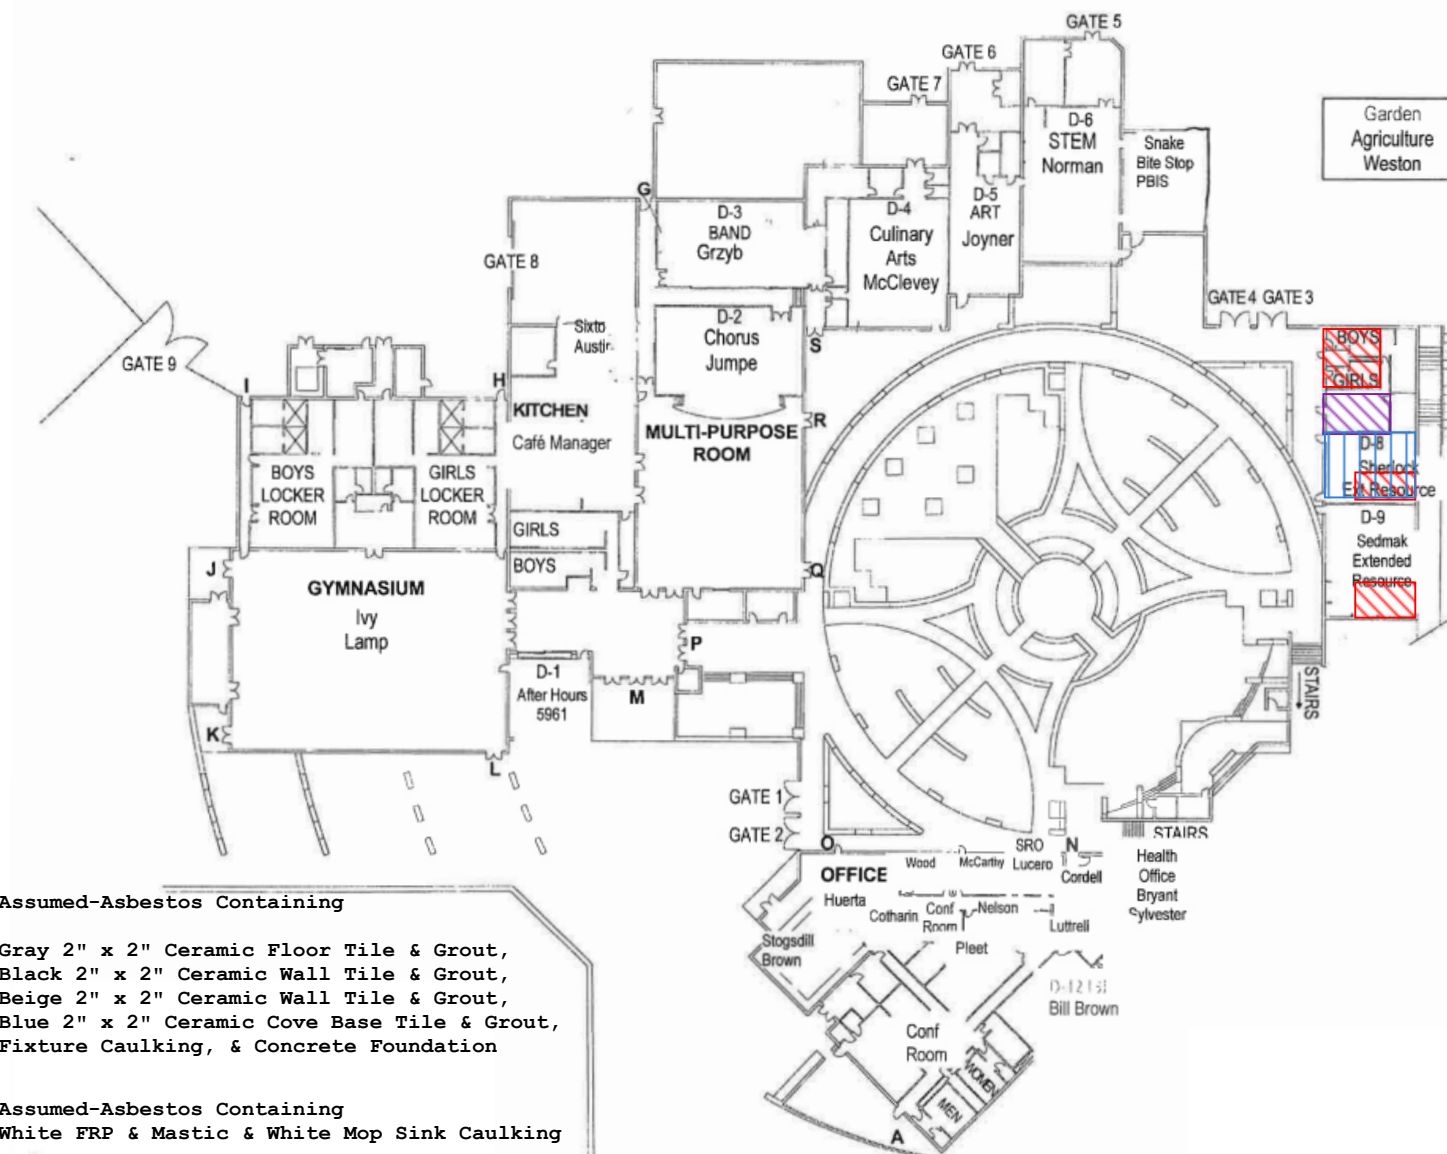

Assumed Asbestos-Containing Material Map (9)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53
Main Building - Lower Level

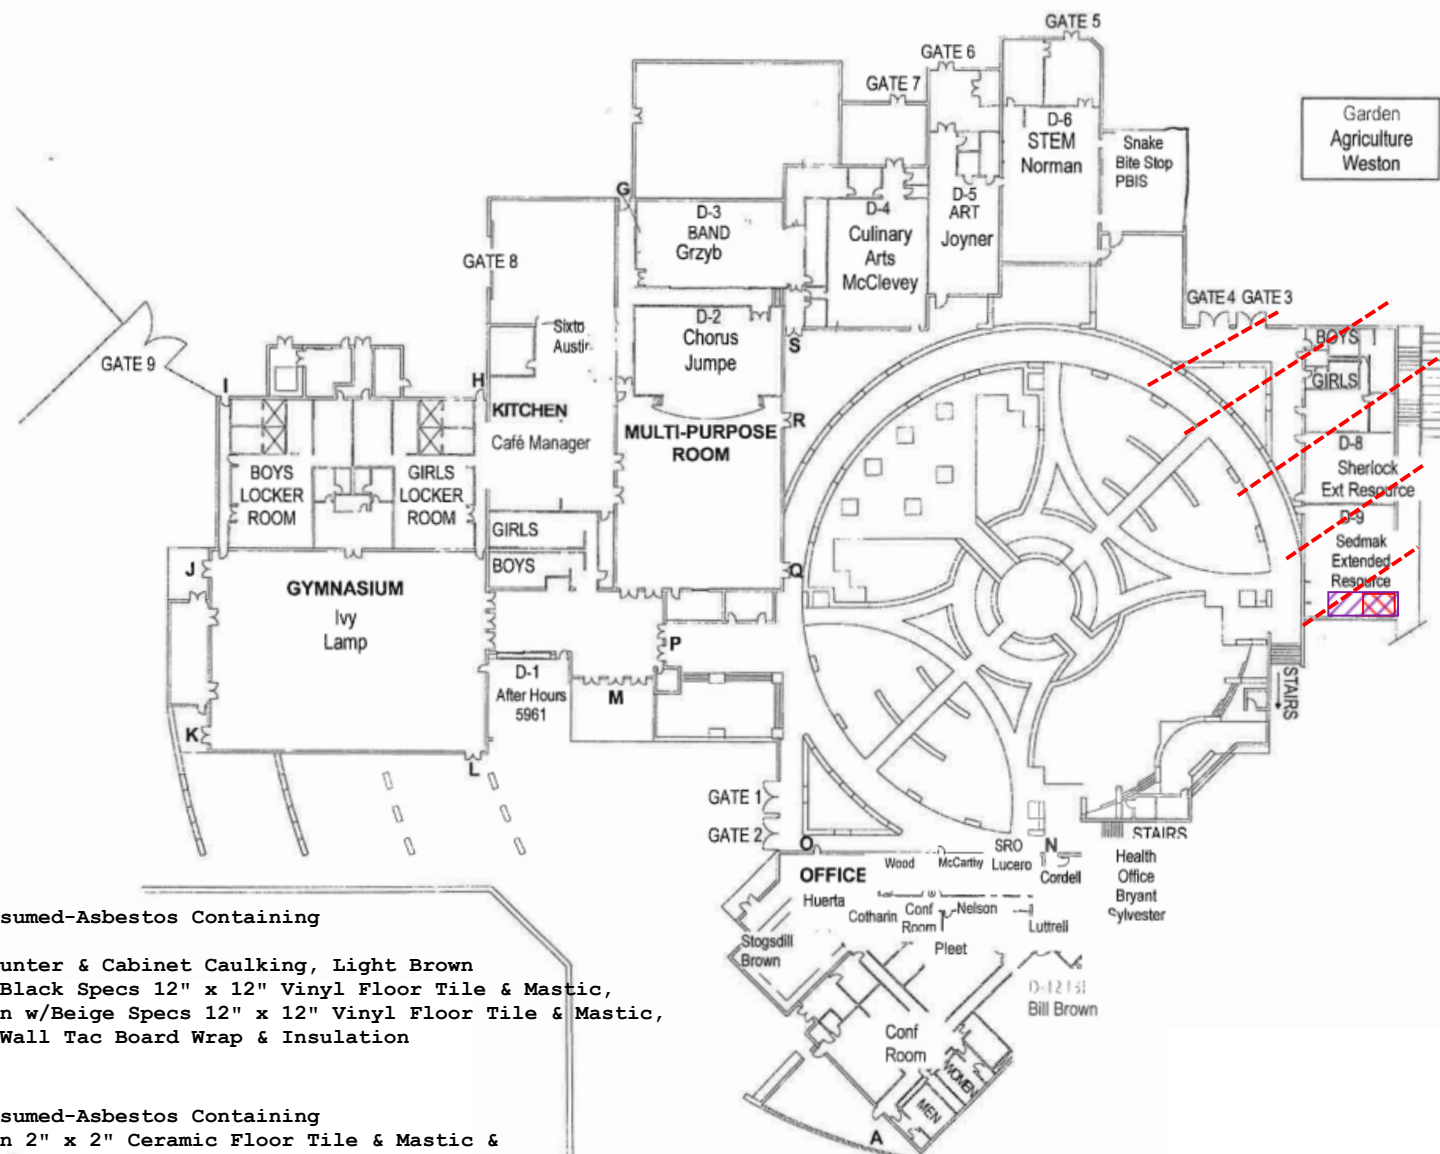

Assumed-Asbestos Containing

Counter & Cabinet Caulking, Light Brown
w/Black Specs 12" x 12" Vinyl Floor Tile & Mastic,
Tan w/Beige Specs 12" x 12" Vinyl Floor Tile & Mastic,
& Wall Tac Board Wrap & Insulation

Assumed-Asbestos Containing
Tan 2" x 2" Ceramic Floor Tile & Mastic &
Tan 1" x 1" Ceramic Floor Tile & Mastic



Assumed-Asbestos Containing
White 6" x 6" Ceramic Cove Base & Grout

Assumed Asbestos-Containing Material Map (10)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Lower Level

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

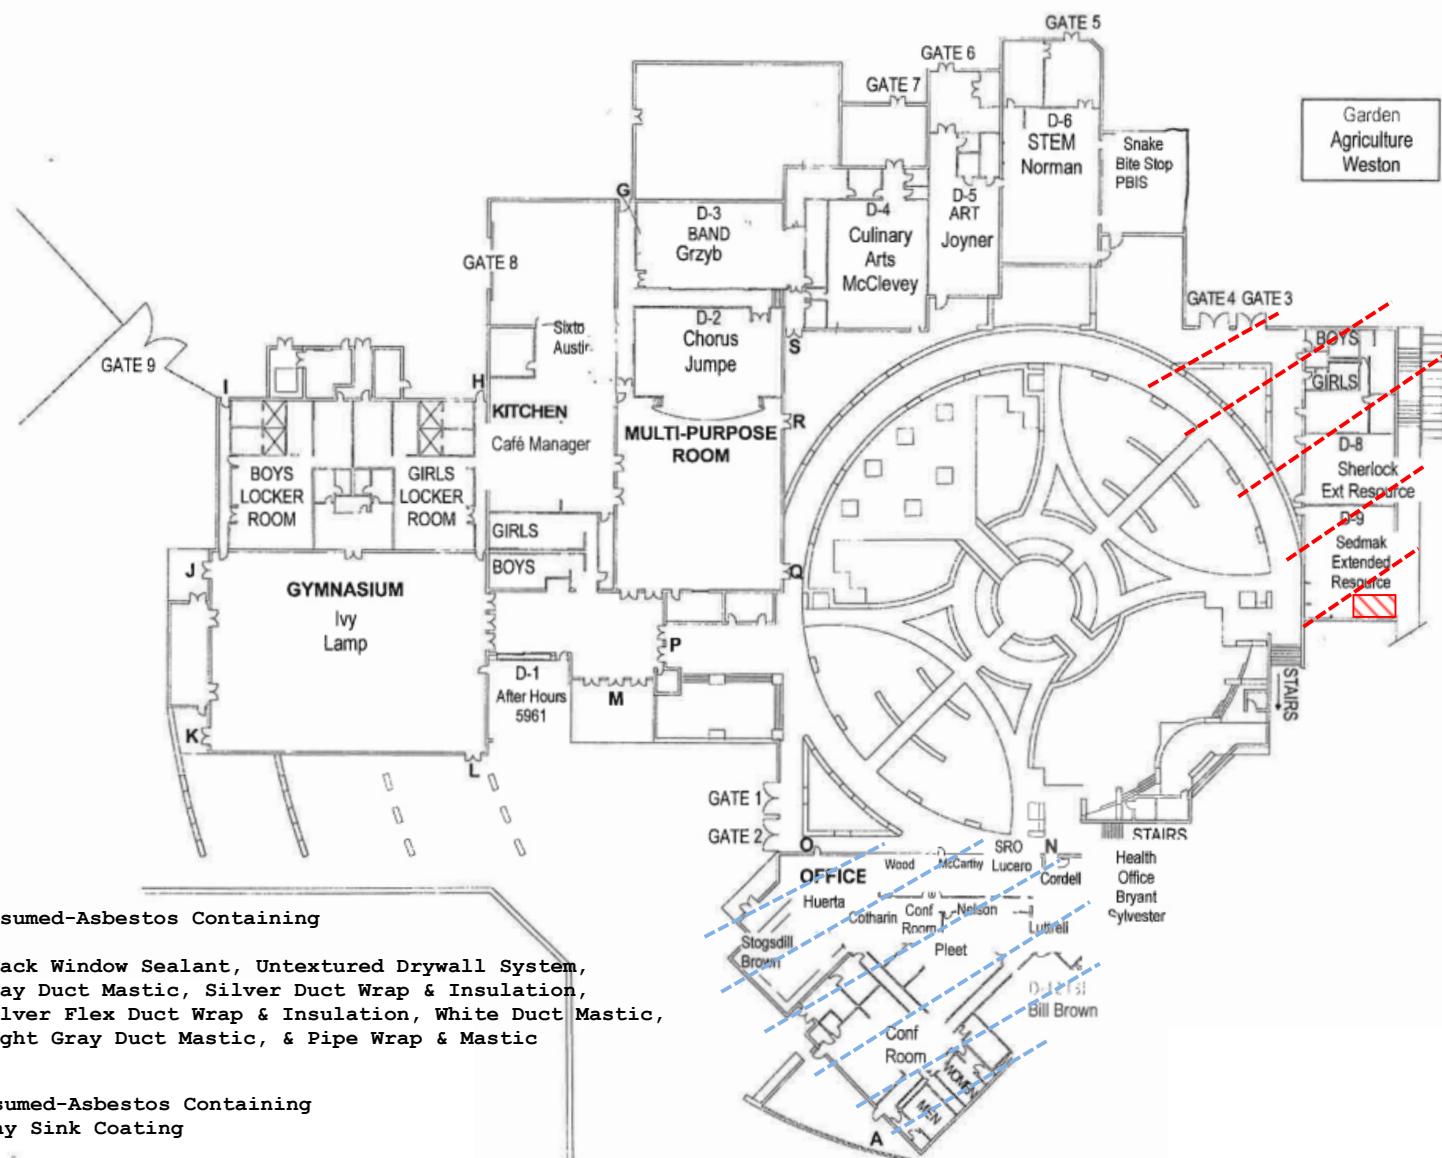

Assumed-Asbestos Containing

Black Window Sealant, Untextured Drywall System,
Gray Duct Mastic, Silver Duct Wrap & Insulation,
Silver Flex Duct Wrap & Insulation, White Duct Mastic,
Light Gray Duct Mastic, & Pipe Wrap & Mastic



Assumed-Asbestos Containing
Gray Sink Coating



Assumed-Asbestos Containing
Black 2' x 2' Carpet & Mastic & 9" x 9" Black Grout

Assumed Asbestos-Containing Material Map (11)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Lower Level

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

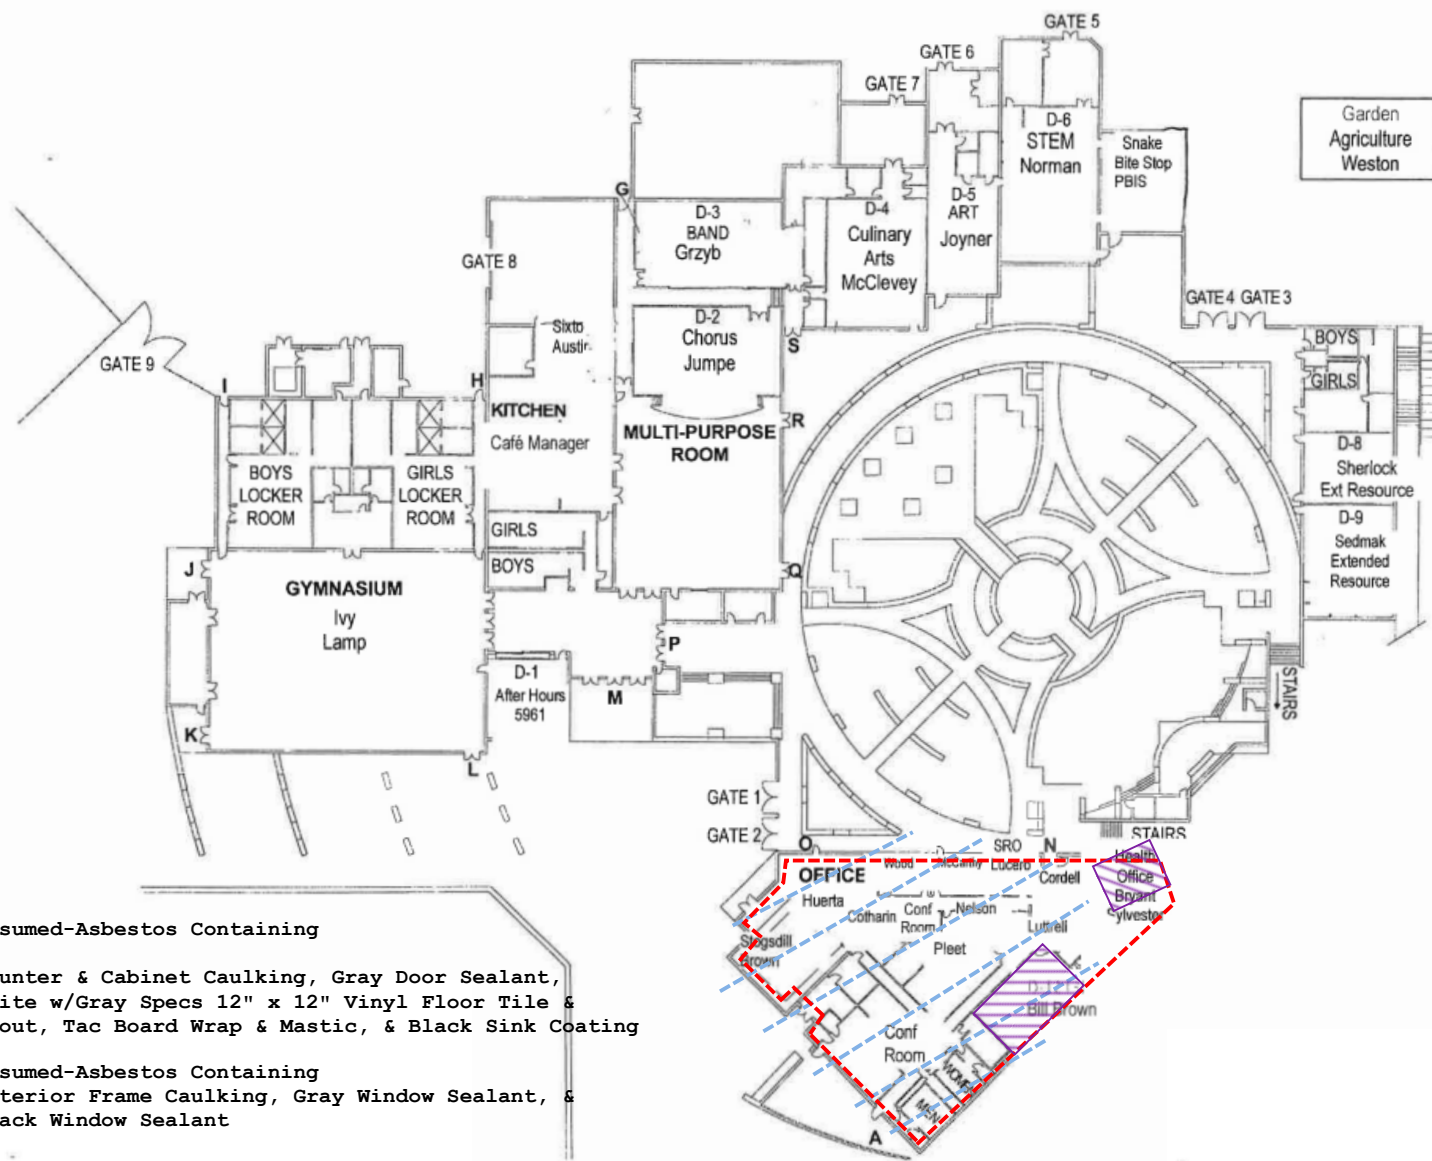

Assumed-Asbestos Containing

----- Counter & Cabinet Caulking, Gray Door Sealant, White w/Gray Specs 12" x 12" Vinyl Floor Tile & Grout, Tac Board Wrap & Mastic, & Black Sink Coating

Assumed-Asbestos Containing

----- Interior Frame Caulking, Gray Window Sealant, & Black Window Sealant



Assumed-Asbestos Containing


Light Brown w/Black Specs 12" x 12" Vinyl Floor Tile & Mastic & Tan w/Beige Specs 22" x 12" Vinyl Floor Tile & Mastic

Assumed Asbestos-Containing Material Map (12)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Lower Level

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415


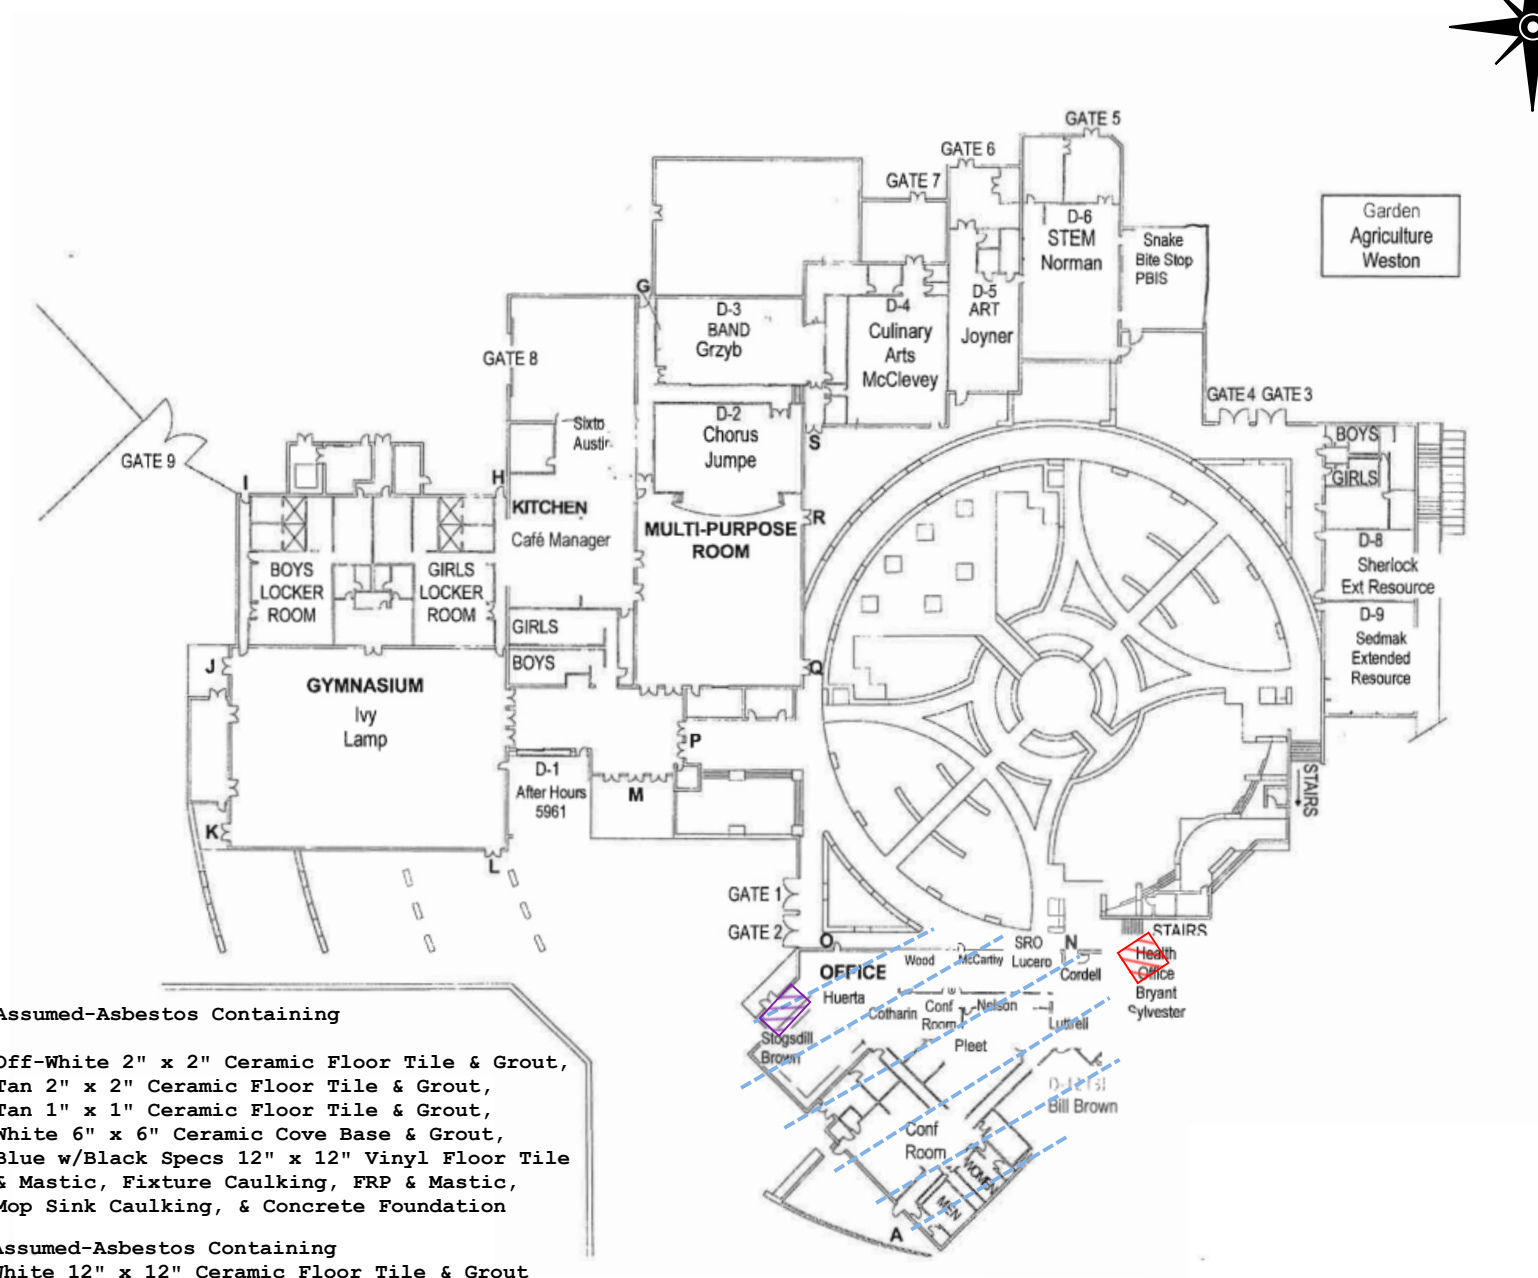


Off-White 2" x 2" Ceramic Floor Tile & Grout,
Tan 2" x 2" Ceramic Floor Tile & Grout,
Tan 1" x 1" Ceramic Floor Tile & Grout,
White 6" x 6" Ceramic Cove Base & Grout,
Blue w/Black Specs 12" x 12" Vinyl Floor Tile
& Mastic, Fixture Caulking, FRP & Mastic,
Mop Sink Caulking, & Concrete Foundation

Assumed-Asbestos Containing
Beige Rough Texture Wallpaper

Main Building - Lower Level

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

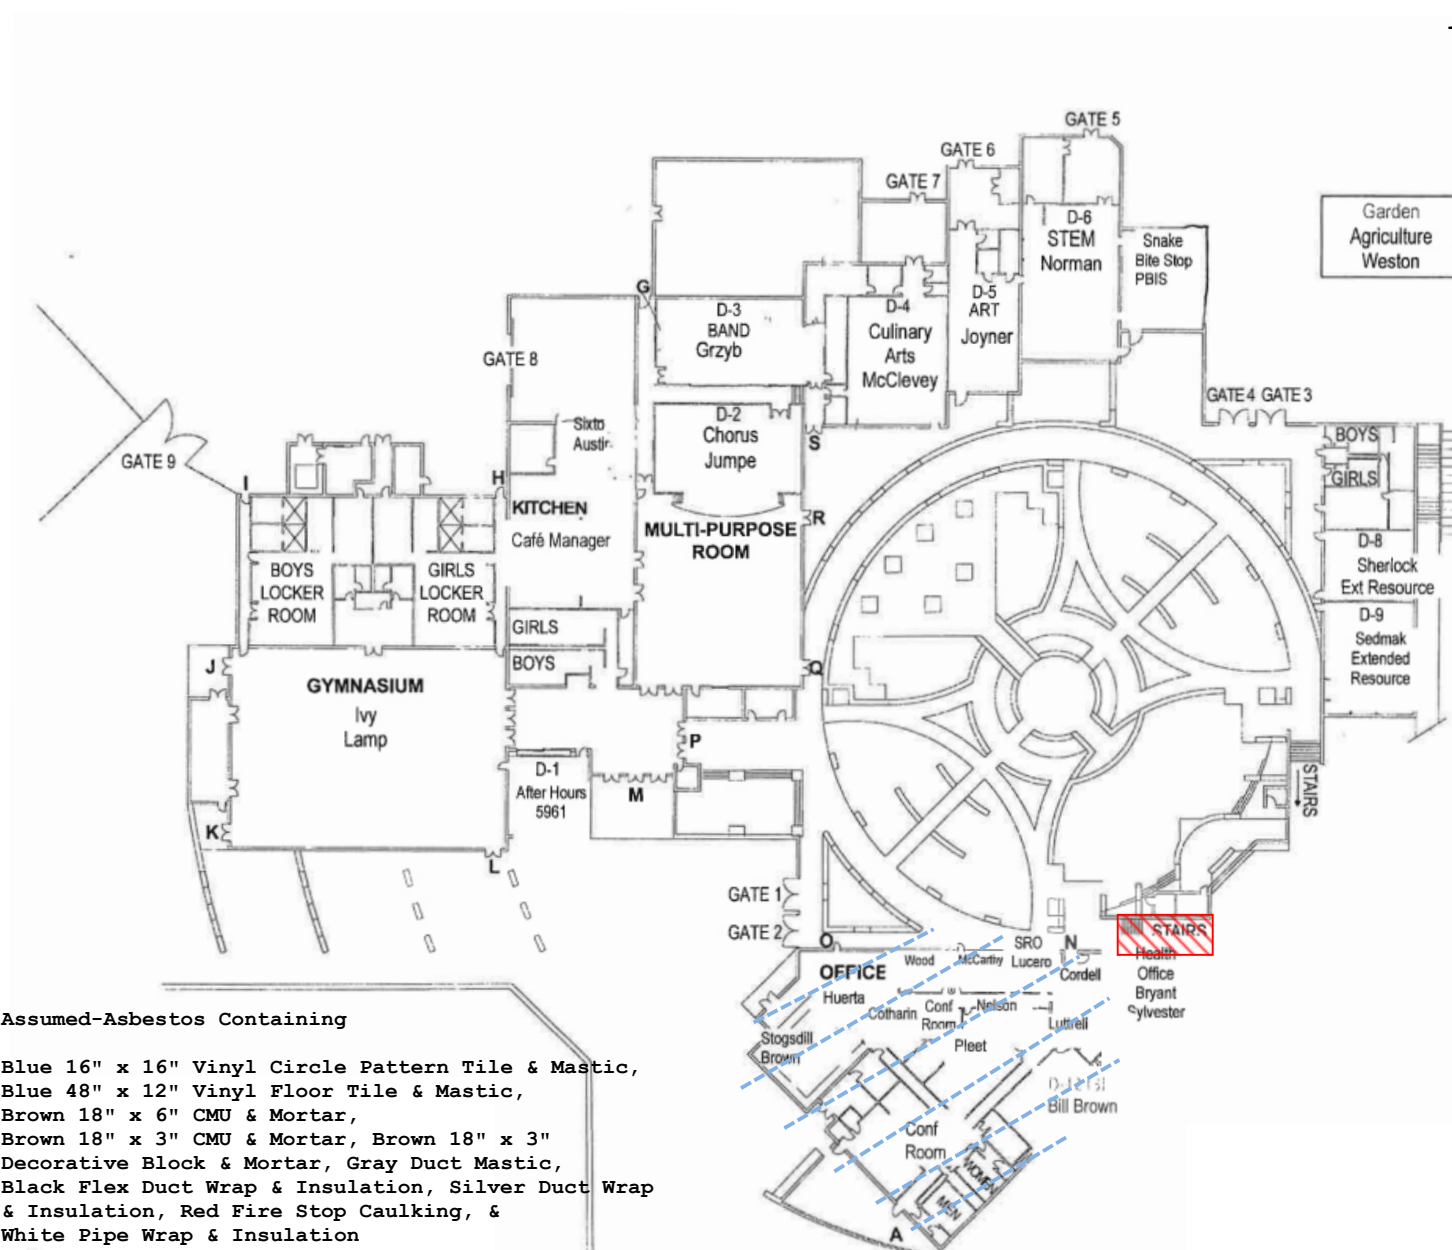


Assumed-Asbestos Containing

Blue 16" x 16" Vinyl Circle Pattern Tile & Mastic,
Blue 48" x 12" Vinyl Floor Tile & Mastic,
Brown 18" x 6" CMU & Mortar,
Brown 18" x 3" CMU & Mortar, Brown 18" x 3"
Decorative Block & Mortar, Gray Duct Mastic,
Black Flex Duct Wrap & Insulation, Silver Duct Wrap
& Insulation, Red Fire Stop Caulking, &
White Pipe Wrap & Insulation



**Assumed-Asbestos Containing
Brown Door Frame Sealant**





Assumed Asbestos-Containing Material Map (14)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Lower Level

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

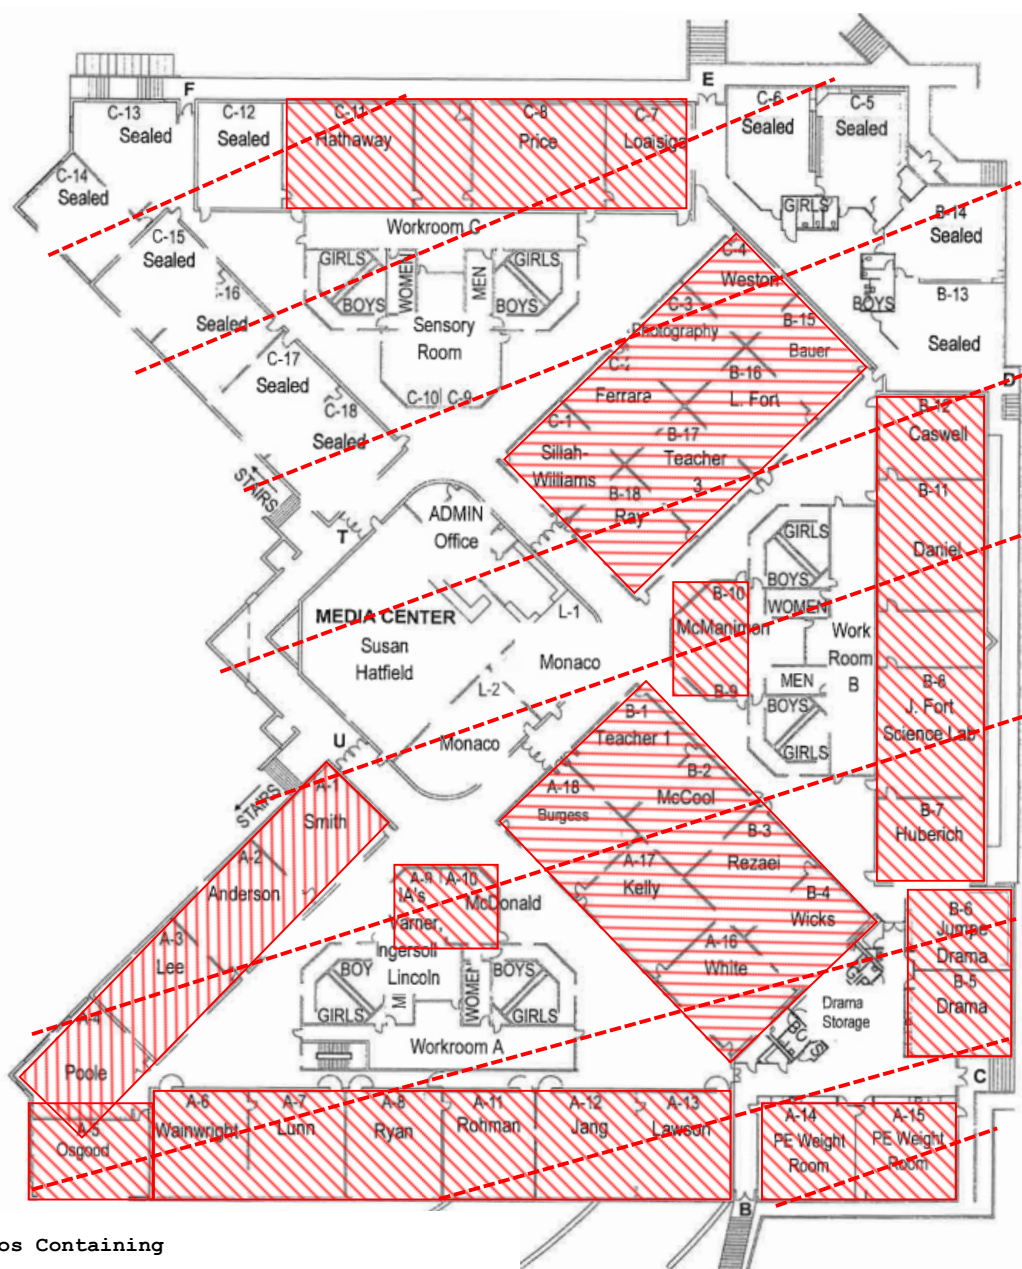

Assumed-Asbestos Containing

White Frame Caulking, Black Sink Coating,
Off-White 2" x 2" Ceramic Floor Tile & Grout,
Tan 2" x 2" Ceramic Floor Tile & Grout,
Tan 1" x 1" Ceramic Floor Tile & Grout,
Beige 2" x 2" Ceramic Wall Tile & Grout,
Black 2" x 2" Ceramic Wall Tile & Grout,
White 4" x 4" Ceramic Cove Base Tile & Grout,
& Silver Caulking

Assumed-Asbestos Containing



Light Brown w/Black Specs 12" x 12" Vinyl Floor Tile & Mastic,
Tan w/Beige Specs 12" x 12" Vinyl Floor Tile & Mastic,
Blue w/Black Specs 12" x 12" Vinyl Floor Tile & Mastic,
& Tac Board Wrap & Insulation

Assumed Asbestos-Containing Material Map (15)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Second Level

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

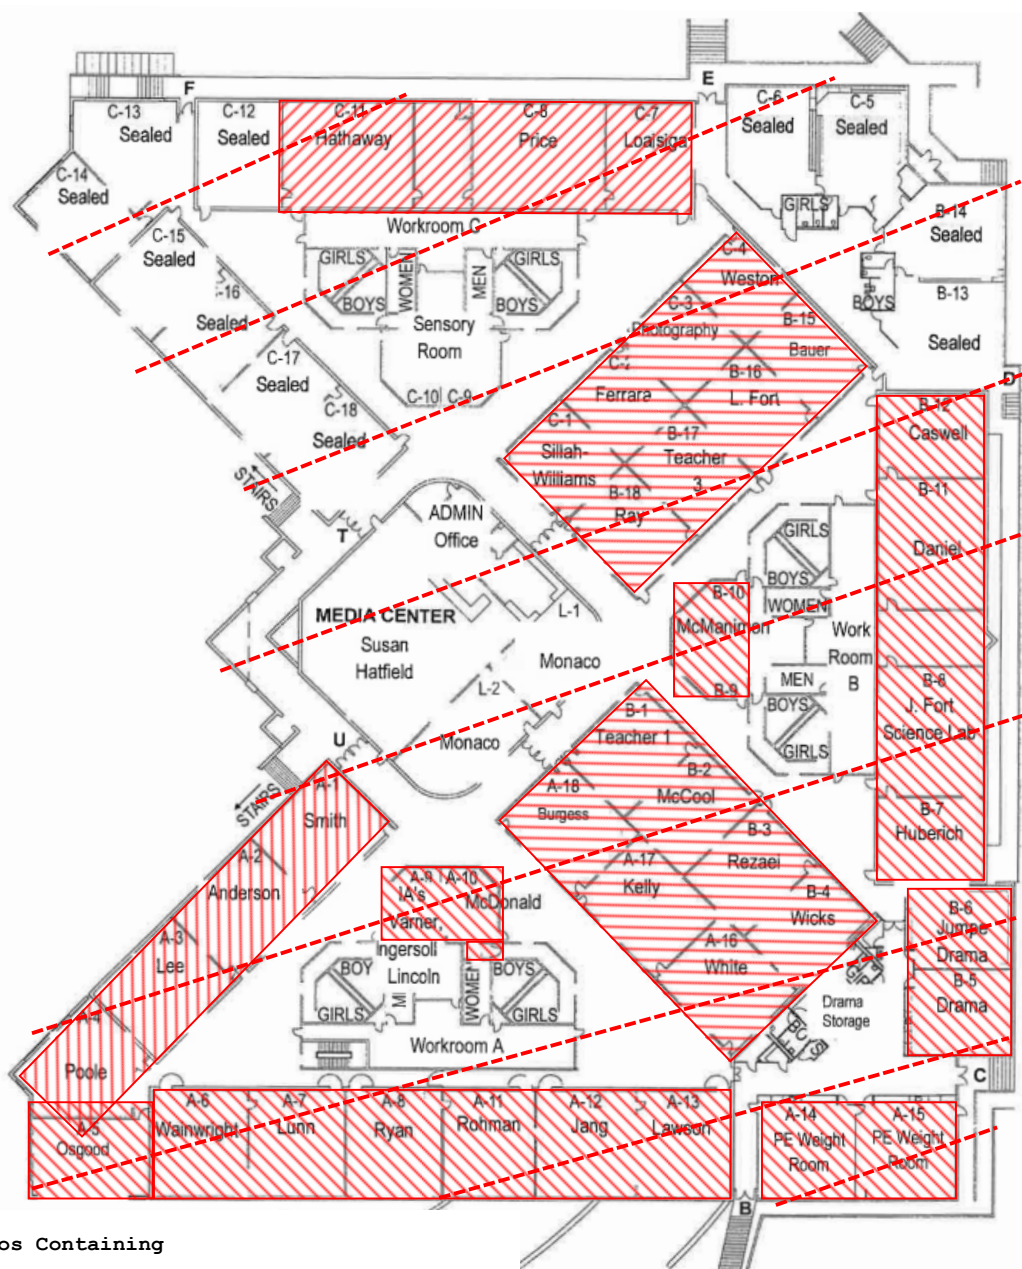

Assumed-Asbestos Containing

Concrete Foundation, Brown Expansion Joint, Untextured Drywall System, Gray Duct Mastic, Black Flex Duct Wrap & Insulation, Silver Duct Wrap & Insulation, Red Fire Stop Caulking, & Black 2" x 2" Carpet & Mastic

Assumed-Asbestos Containing


White Pipe Wrap & Insulation, 16" x 8" Brown CMU & Mortar, 16" x 4" Brown CMU & Mortar, Black Window Sealant, White Counter & Cabinet Caulking, Transite Panel (Hood), & 12" x 12" White w/Gray Specs Vinyl Floor Tile & Mastic

Assumed Asbestos-Containing Material Map (16)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Second Level

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415



**Assumed-Asbestos Containing
Skip Trowel Texture Drywall System**



**Assumed-Asbestos Containing
Transite Hood Panel**



**Assumed-Asbestos Containing
Blue 2" x 2" Vinyl Circle Pattern Tile & Mastic**

Assumed Asbestos-Containing Material Map (17)
Kyrene Akimel A-al Middle School
2720 East Liberty Lane, Phoenix, Arizona 85048

Project No. AZ1418.53

Main Building - Second Level

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

SECTION 11



INSPECTOR ACCREDITATIONS

THE ASBESTOS INSTITUTE

Certifies that

Isai Portillo

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on


December 12, 2024

and successfully completed and passed the competency exam.

Certificate:
ON-188748-19438-121224

Date of Examination:
12-Dec-2024

Date of Expiration:
12-Dec-2025



J. Cavness
Director



Approved Instructor

THE ASBESTOS INSTITUTE

20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

FL Course # CRS228

The person receiving this certificate has completed the requisite training for asbestos accreditation under TSCA Title II.

THE ASBESTOS INSTITUTE

Certifies that

Tracey Carpenter

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

August 29, 2024

and successfully completed and passed the competency exam.

Certificate:
ON-188748-14588-082924

Date of Examination:
29-Aug-2024

Date of Expiration:
29-Aug-2025



William T. Cavness
Director



Approved Instructor

THE ASBESTOS INSTITUTE

20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

The person receiving this certificate has completed the requisite training for asbestos accreditation under TSCA Title II.

THE ASBESTOS INSTITUTE

Certifies that

Xin Lou

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

September 20, 2022

and successfully completed and passed the competency exam.

Certificate:
ON-4644-548-092022

Date of Examination:
20-Sep-2022

Date of Expiration:
20-Sep-2023



William T. Cavness
Director



Approved Instructor

THE ASBESTOS INSTITUTE

20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

This training meets all requirements for asbestos certification under Toxic Substance Control Act Title II.

THE ASBESTOS INSTITUTE

Certifies that

Nicholas Marcos

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

March 24, 2022

and successfully completed and passed the competency exam.

Certificate:

ON-4644-8873-032422

Date of Examination:

24-Mar-2022

Date of Expiration:

24-Mar-2023



William T. Cavness
Director



Approved Instructor

THE ASBESTOS INSTITUTE

20033 N. 19th Ave, Building 6, Phoenix, AZ 85027

602-864-6564 – www.theasbestosinstitute.com

This training meets all requirements for asbestos certification under Toxic Substance Control Act Title II.

THE ASBESTOS INSTITUTE

Certifies that **KRISTA BUTLER**

has attended the EPA approved course

Building Inspector Refresher

and successfully passed and completed
the competency exam.

This training meets all requirements for asbestos
accreditation under TSCA Title II.

Issue Date : 29-Aug 2016

Expiration Date : 29-Aug 2017




Approved Instructor

THE ASBESTOS INSTITUTE

Certifies that

Robert H Duncan

has attended the EPA approved course

AHERA Building Inspector Refresher

Approval Code: CA-089-06

May 2, 2014

and successfully passed the competency exam.

Date of Examination: **May 2, 2014**

Date of Expiration: **May 2, 2015**



William T. Cavness
Director



Approved Instructor

THE ASBESTOS INSTITUTE

20033 N. 19th Avenue

Building #6

Phoenix, AZ 85027

602-864-6564

SECTION 12



LABORATORY ACCREDITATIONS

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500034-0

Eurofins EMLab P&K

San Diego, CA

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Asbestos Fiber Analysis

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communiqué on ISO/IEC 17025).*

2025-01-01 through 2025-12-31

Effective Dates



A handwritten signature in blue ink, reading "Dana S. Laman".

For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500031-0

Eurofins EMLab P&K

Phoenix, AZ

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Asbestos Fiber Analysis

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2023-01-01 through 2023-12-31

Effective Dates



A handwritten signature in blue ink, reading "Dana S. Laman".

For the National Voluntary Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

Eurofins EMLab P&K

1501 W. Knudsen Dr.

Phoenix, AZ 85027-1307

Claudia Palermo

Phone: 856-334-1001

Email: claudia.palermo@et.eurofinsus.com

<http://www.emlab.com>

ASBESTOS FIBER ANALYSIS

NVLAP LAB CODE 500031-0

Bulk Asbestos Analysis

Code


Description

18/A01

EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples

18/A03

EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials



For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500031-0

Eurofins EMLab P&K

Phoenix, AZ

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Asbestos Fiber Analysis

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2022-01-01 through 2022-12-31

Effective Dates



A handwritten signature in blue ink, reading "Dana S. Laman".

For the National Voluntary Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

Eurofins EMLab P&K

1501 W. Knudsen Dr.

Phoenix, AZ 85027-1307

Mr. Dan Shelby

Phone: 623-298-1015

Email: dan.shelby@eurofinset.com

<http://www.emlab.com>

ASBESTOS FIBER ANALYSIS

NVLAP LAB CODE 500031-0

Bulk Asbestos Analysis

Code


Description

18/A01

EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples

18/A03

EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials



For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500097-0

Aerobiology Laboratory Associates, Inc., Phoenix, AZ
Phoenix, AZ


*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Asbestos Fiber Analysis

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2021-01-01 through 2021-12-31
Effective Dates

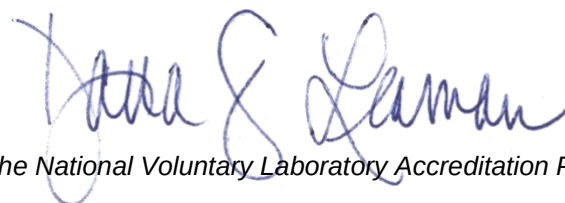


For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 500031-0

EMLab P&K
Phoenix, AZ

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Asbestos Fiber Analysis

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2017-01-01 through 2017-12-31

Effective Dates



Dana S. Laman
For the National Voluntary Laboratory Accreditation Program



SCOPE OF ACCREDITATION TO ISO/IEC 17025:2005

EMLab P&K
1501 W. Knudsen Dr.
Phoenix, AZ 85027-1307
Mr. Dan Shelby
Phone: 623-298-1015
Email: dshelby@emlabpk.com
<http://www.emlab.com>

ASBESTOS FIBER ANALYSIS

NVLAP LAB CODE 500031-0

Bulk Asbestos Analysis

<u>Code</u>	<u>Description</u>
18/A01	EPA 600/M4-82-020: Interim Method for the Determination of Asbestos in Bulk Insulation Samples
18/A03	EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials

A handwritten signature in black ink, appearing to read "Dana S. Laman".

For the National Voluntary Laboratory Accreditation Program

SECTION 3



DESIGNATED PERSON IDENTIFICATION

AHERA
Designated Person
796.93(c)(4)

LEA Designated Person

Print Name:

Address:

Phone:

Training Course Name:

Dates of Training:

Hours of Training:

Signature:

Date:

SECTION 4



AHERA TRAINING CERTIFICATIONS OF SCHOOL STAFF MEMBERS

SECTION 5




RESPONSE ACTIONS WITH DETAILS, REASONS AND SCHEDULES

Response Actions

Management Planner:

Print Name: Basilio Marcos

Signature:



State of Accreditation or EPA: EPA AHERA - Arizona

Accreditation # & Date: #ON-4651-1419-061924, June 19, 2025

Date: March 11, 2025

Building: Main Building

Homogeneous Area #: 194

Homogeneous Area Description: Insulation for White Ceiling Wrap

Location: Room D6

Action:	Repair	Remove	O & M	X
	Encapsulation	Enclose		

Reason: Assumed ACBM in Good Condition with No Potential for Disturbance

Schedule (Start/Finish): End of ACBM Life


ACBM Remaining After Response Action: 2,400 sq. ft.

Response Actions

Management Planner:

Print Name: Basilio Marcos

Signature:



State of Accreditation or EPA: EPA AHERA - Arizona

Accreditation # & Date: #ON-4651-1419-061924, June 19, 2025

Date: March 11, 2025

Building: Main Building

Homogeneous Area #: 197

Homogeneous Area Description: Insulation for White Pipe Wrap

Location: Room D6

Action:	Repair	Remove	O & M	X
	Encapsulation	Enclose		

Reason: Assumed ACBM in Good Condition with No Potential for Disturbance

Schedule (Start/Finish): End of ACBM Life


ACBM Remaining After Response Action: 2,400 sq. ft.

Response Actions

Management Planner:

Print Name: Basilio Marcos

Signature:



State of Accreditation or EPA: EPA AHERA - Arizona

Accreditation # & Date: #ON-4651-1419-061924, June 19, 2025

Date: March 11, 2025

Building: Main Building

Homogeneous Area #: 200

Homogeneous Area Description: Insulation for Silver Ceiling Wrap

Location: Above Plenum

Action:	Repair	Remove	O & M	X
	Encapsulation	Enclose		

Reason: Assumed ACBM in Good Condition with No Potential for Disturbance

Schedule (Start/Finish): End of ACBM Life


ACBM Remaining After Response Action: 5,000 sq. ft.

Response Actions

Management Planner:

Print Name: Basilio Marcos

Signature:



State of Accreditation or EPA: EPA AHERA - Arizona

Accreditation # & Date: #ON-4651-1419-061924, June 19, 2025

Date: March 11, 2025

Building: Main Building

Homogeneous Area #: 203

Homogeneous Area Description: Insulation for Silver Flex Duct Wrap

Location: Above Plenum

Action:	Repair	Remove	O & M	X
	Encapsulation	Enclose		

Reason: Assumed ACBM in Good Condition with No Potential for Disturbance

Schedule (Start/Finish): End of ACBM Life


ACBM Remaining After Response Action: 5,000 sq. ft.

Response Actions

Management Planner:

Print Name: Basilio Marcos

Signature:



State of Accreditation or EPA: EPA AHERA - Arizona

Accreditation # & Date: #ON-4651-1419-061924, June 19, 2025

Date: March 11, 2025

Building: Main Building

Homogeneous Area #: 215

Homogeneous Area Description: Insulation for Silver Duct Wrap

Location: Above Plenum Throughout Building

Action:	Repair	Remove	O & M	X
	Encapsulation	Enclose		

Reason: Assumed ACBM in Good Condition with No Potential for Disturbance

Schedule (Start/Finish): End of ACBM Life


ACBM Remaining After Response Action: 5,000 sq. ft.

Response Actions

Management Planner:

Print Name: Basilio Marcos

Signature:



State of Accreditation or EPA: EPA AHERA - Arizona

Accreditation # & Date: #ON-4651-1419-061924, June 19, 2025

Date: March 11, 2025

Building: Main Building

Homogeneous Area #: 232

Homogeneous Area Description: Insulation for Black Flex Duct Wrap

Location: Main Office

Action:	Repair	Remove	O & M	X
	Encapsulation	Enclose		

Reason: Assumed ACBM in Good Condition with No Potential for Disturbance

Schedule (Start/Finish): End of ACBM Life


ACBM Remaining After Response Action: 2,400 sq. ft.

Response Actions

Management Planner:

Print Name: Basilio Marcos

Signature:



State of Accreditation or EPA: EPA AHERA - Arizona

Accreditation # & Date: #ON-4651-1419-061924, June 19, 2025

Date: March 11, 2025

Building: Main Building

Homogeneous Area #: 158

Homogeneous Area Description: 2' x 2' Replacement Ceiling Tile

Location: Throughout Gym

Action:	Repair	Remove	O & M	X
	Encapsulation	Enclose		

Reason: Assumed ACBM in Good Condition with No Potential for Disturbance

Schedule (Start/Finish): End of ACBM Life


ACBM Remaining After Response Action: 5,250 sq. ft.

Response Actions

Management Planner:

Print Name: Basilio Marcos

Signature:



State of Accreditation or EPA: EPA AHERA - Arizona

Accreditation # & Date: #ON-4651-1419-061924, June 19, 2025

Date: March 11, 2025

Building: Main Building

Homogeneous Area #: 168

Homogeneous Area Description: White Smooth 2' x 2' Ceiling Tile

Location: Snack Bar & Room D4

Action:	Repair	Remove	O & M	X
	Encapsulation	Enclose		

Reason: Assumed ACBM in Good Condition with No Potential for Disturbance

Schedule (Start/Finish): End of ACBM Life


ACBM Remaining After Response Action: 250 sq. ft.

Response Actions

Management Planner:

Print Name: Basilio Marcos

Signature:



State of Accreditation or EPA: EPA AHERA - Arizona

Accreditation # & Date: #ON-4651-1419-061924, June 19, 2025

Date: March 11, 2025

Building: Main Building

Homogeneous Area #: 169

Homogeneous Area Description: Tan Smooth 2' x 2' Ceiling Tile

Location: Snack Bar & Room D4

Action:	Repair	Remove	O & M	X
	Encapsulation	Enclose		

Reason: Assumed ACBM in Good Condition with No Potential for Disturbance

Schedule (Start/Finish): End of ACBM Life


ACBM Remaining After Response Action: 10 sq. ft.

Response Actions

Management Planner:

Print Name: Basilio Marcos

Signature:



State of Accreditation or EPA: EPA AHERA - Arizona

Accreditation # & Date: #ON-4651-1419-061924, June 19, 2025

Date: March 11, 2025

Building: Main Building

Homogeneous Area #: 171

Homogeneous Area Description: White Smooth 2' x 4' Ceiling Tile

Location: Kitchen

Action:	Repair	Remove	O & M	X
	Encapsulation	Enclose		

Reason: Assumed ACBM in Good Condition with No Potential for Disturbance

Schedule (Start/Finish): End of ACBM Life


ACBM Remaining After Response Action: 1,900 sq. ft.

Response Actions

Management Planner:

Print Name: Basilio Marcos

Signature:



State of Accreditation or EPA: EPA AHERA - Arizona

Accreditation # & Date: #ON-4651-1419-061924, June 19, 2025

Date: March 11, 2025

Building: Main Building

Homogeneous Area #: 183

Homogeneous Area Description: 2' x 4' Ceiling Tile w/ Pin Holes

Location: Band Room

Action:	Repair	Remove	O & M	X
	Encapsulation	Enclose		

Reason: Assumed ACBM in Good Condition with No Potential for Disturbance

Schedule (Start/Finish): End of ACBM Life

ACBM Remaining After Response Action: 550 sq. ft.

SECTION 6



ACCREDITATION STATEMENT

**Assurance of Accreditation
Under this Management Plan**
763.93(e)(7)

Inspector:

Name: Isai Portillo

State of Accreditation or EPA: EPA AHERA Building Inspector - Arizona

Accreditation Date(s): December 12, 2024 – December 12, 2025

Accreditation Number(s): ON-188748-19438-121224

Management Planner:

Name: Basilo Marcos

State of Accreditation or EPA: EPA AHERA Management Planner – Arizona

Accreditation Date(s) Valid: June 19, 2024 – June 19, 2025

Accreditation Number(s): ON-4651-1419-061924

Any Project Designer, Contractor/Supervisor or Worker who performs work on response actions under this Management Plan shall be accredited by either an EPA approved state contractor accreditation plan or an EPA approved course under section 206(b) to Title II of the Toxic Substance Control Act.

SECTION 7



REMAINING ACBM

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District		Campus: Kyrene Akimel A-al Middle School	
		Address: 2720 East Liberty Lane, Phoenix, Arizona 85048	
Building: Main Building			
Homogeneous Area Number	Material Description	Location(s)	Approximate Quantity (sq ft)
Assumed ACBM			
121	Brown 16" x 8" CMU	Gym, Gym Lobby, and Classrooms	6,000
122	Mortar for Brown 16" x 8" CMU		6,000
123	Brown 16" x 3" CMU	Gym, Gym Lobby, and Classrooms	6,000
124	Mortar for Brown 16" x 3" CMU		6,000
125	Brown 16" x 3" Decorative CMU	Gym, Gym Lobby, and Classrooms	600
126	Mortar for Brown 16" x 3" Decorative CMU		600
127	Clear 6" x 6" Block Grout	Gym Lobby	150
128	Brown Door Sealant	Gym & Gym Lobby	330
129	Floor Expansion Joint	Throughout	10,000
130	Off-White 12" x 12" Ceramic Floor Tile	Gym Lobby, Snack Bar, & Kitchen	2,200
131	Grout for Off-White 12" x 12" Ceramic Floor Tile		220
132	Blue 12" x 12" Ceramic Floor Tile	Gym Lobby, Snack Bar, & Kitchen	800
133	Grout for Blue 12" x 12" Ceramic Floor Tile		80
134	Fixture Caulking	Restrooms	5
135	Off-White 2" x 2" Ceramic Floor Tile	Restrooms	1,800
136	Grout for Off-White 2" x 2" Ceramic Floor Tile		180
137	Tan 2" x 2" Ceramic Floor Tile	Restrooms	1,800
138	Grout for Tan 2" x 2" Ceramic Floor Tile		180
139	Tan 1' x 1' Ceramic Floor Tile	Restrooms	1,800
140	Grout for Tan 1' x 1' Ceramic Floor Tile		180
141	White 4" x 4" Ceramic Wall Tile	Restrooms	1,800
142	Grout for White 4" x 4" Ceramic Wall Tile		180
143	White 4" x 4" Ceramic Cove Base Tile	Restrooms	1,800
144	Grout for White 4" x 4" Ceramic Cove Base Tile		180
145	Black 2" x 2" Ceramic Wall Tile	Restrooms	1,800
146	Grout for Black 4" x 4" Ceramic Wall Tile		180
147	Beige 2" x 2" Ceramic Wall Tile	Restrooms	1,800
148	Grout for Beige 2" x 2" Ceramic Wall Tile		180

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District		Campus: Kyrene Akimel A-al Middle School	
		Address: 2720 East Liberty Lane, Phoenix, Arizona 85048	
Building: Main Building			
Homogeneous Area Number	Material Description	Location(s)	Approximate Quantity (sq ft)
149	Tac Board Wrap	Classrooms Throughout	10,000
150	Mastic for Tac Board Wrap		10,000
151	Light Brown w/Black Specs 12" x 12" Vinyl Floor Tile (VCT)	Kitchen, Men's Coach Office, and Restrooms	2,000
152	Mastic for Light Brown w/ Black Specs 12" x 12" VCT		2,000
153	Blue w/Black Specs 12" x 12" Vinyl Floor Tile (VCT)	Classrooms D1 to D5	2,750
154	Mastic for Blue w/Black Specs 12" x 12"		2,750
155	Tan w/Beige Specs 12" x 12" Vinyl Floor Tile (VCT)	Classrooms D1 to D5	2,750
156	Mastic for Tan w/Beige Specs 12" x 12"		2,750
157	Black Sink Coating	Classrooms and Band Room	8
158	2' x 2' Replacement Ceiling Tile	Gym - Throughout	5,250
159	Black L-Shaped Cove Base	Basketball Court	370
160	Mastic for Black L-Shaped Cove Base		370
161	White Flex Connect Damper	Gym Storage	20
162	Brown 4" x 4" Ceramic Wall Tile	Gym	50
163	Grout for Brown 4" x 4" Ceramic Wall Tile		5
164	White Paneling	Boy's Locker Room Hallway	525
165	Mastic for White Paneling		525
166	Gray 12" x 12" Texture Ceramic Tile	Locker Rooms	5,250
167	Grout for Gray 12" x 12" Texture Ceramic Tile		525
168	White Smooth 2' x 2' Ceiling Tile	Snack Bar & Room D4	250
169	Tan Smooth 2' x 2' Ceiling Tile	Snack Bar & Room D4	10
170	Silver Caulking	Snack Bar	30
171	White Smooth 2' x 4' Ceiling Tile	Kitchen	1,900
172	Beige 12" x 12" Ceramic Floor Tile	Kitchen	25
173	Grout for Beige 12" x 12" Ceramic Floor Tile		2
174	Black/White Texture 12" x 12" Ceramic Floor Tile	Kitchen	3
175	Grout for Black/White Texture 12" x 12" Ceramic Floor Tile		3

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District		Campus: Kyrene Akimel A-al Middle School	
		Address: 2720 East Liberty Lane, Phoenix, Arizona 85048	
Building: Main Building			
Homogeneous Area Number	Material Description	Location(s)	Approximate Quantity (sq ft)
176	Off-White 6" x 4" Ceramic Cove Base	Kitchen	34
177	Grout for Off-White 6" x 4" Ceramic Cove Base		3
178	Blackw/White Specs 12" x 12" Vinyl Floor Tile (VCT)	Stage	2,100
179	Mastic for Blackw/White Specs 12" x 12" VCT		21
180	Blue 54" x 12" Vinyl w/ Circle Pattern	Stage Stairs	50
181	Mastic for Blue 54" x 12" Vinyl w/ Circle Pattern		50
182	Black/Gray Sink Coating	Stage, Workroom, and Rooms D8/D9	5
183	2' x 4' Ceiling Tile w/ Pin Holes	Band Room	550
184	Counter Caulking	Classrooms	210
185	Cabinet Caulking	Classrooms	210
186	Interior Frame Caulking	Throughout	330
187	Concrete Foundation	Throughout	40,500
188	Gray 2" x 2" Ceramic Floor Tile	Room D4	40
189	Grout for Gray 2" x 2" Ceramic Floor Tile		4
190	New White Fiberglass Reinforced Plastic (FRP)	D4 Restroom	224
191	Mastic for New White Fiberglass Reinforced Plastic		22
192	White w/Black Specs 12" x 12" Vinyl Floor Tile (VCT)	Multi-Purpose Restrooms & Room D5	4,800
193	Mastic for White w/Black Specs 12" x 12" VCT		4,800
194	White Ceiling Wrap	Room D6	2,400
195	Insulation for White Ceiling Wrap		2,400
196	White Pipe Wrap	Room D6	2,400
197	Insulation for White Pipe Wrap		2,400
198	Ceiling Plaster	Locker Rooms	5,000
199	Silver Ceiling Wrap	Above Plenum Throughout Building	5,000
200	Insulation for Silver Ceiling Wrap		5,000
201	Red Fire Stop Caulking	Above Plenum Throughout Building	250
202	Silver Flex Duct Wrap	Above Plenum Throughout Building	5,000
203	Insulation for Silver Flex Duct Wrap		5,000
204	Untextured Drywall System	Above Plenum Throughout Building	5,000

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District		Campus: Kyrene Akimel A-al Middle School	
		Address: 2720 East Liberty Lane, Phoenix, Arizona 85048	
Building: Main Building			
Homogeneous Area Number	Material Description	Location(s)	Approximate Quantity (sq ft)
205	Blue 4" x 4" Ceramic Cove Base Tile	Restrooms	120
206	Grout for Blue 4" x 4" Ceramic Cove Base Tile		12
207	Fiberglass Reinforced Plastic (FRP)	Custodial Room	40
208	Mastic for Fiberglass Reinforced Plastic (FRP)		40
209	Mop Sink Caulking	Custodial Room	5
210	White 6" x 6" Ceramic Cove Base	Room D9 - Shower & Restroom	140
211	Grout for White 6" x 6" Ceramic Cove Base		4
212	Black Window Sealant	D8 to D9 - Throughout	30
213	Gray Duct Mastic	Above Plenum Throughout Building	5,000
214	Silver Duct Wrap	Above Plenum Throughout Building	5,000
215	Insulation for Silver Duct Wrap		5,000
216	White Duct Mastic	Above Plenum Throughout Building	5,000
217	Black 2' x 2' Carpet	Main Office	6,180
218	Mastic for Black 2' x 2' Carpet		6,180
219	9" x 9" Black Grout	Main Office	150
220	Gray Window Sealant	Main Office	30
221	Gray Door Sealant	Main Office	30
222	White w/Gray Specs 12" x 12" Vinyl Floor Tile (VCT)	Main Office	400
223	Mastic for White w/Gray Specs 12" x 12" VCT		400
224	Beige Rough Texture Wallpaper	Main Office - Nurse	80
225	Blue 16" x 16" Vinyl Circle Pattern Tile	Main Office	300
226	Mastic for Blue 16" x 16" Vinyl Circle Pattern Tile		300
227	Blue 48" x 12" Blue Vinyl Floor Tile (VCT)	Main Office	1,545
228	Mastic for Blue 48" x 12" Blue VCT		1,545
229	Brown 18" x 6" CMU	Main Office	3,090
230	Mortar for Brown 18" x 6" CMU		3,090

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District		Campus: Kyrene Akimel A-al Middle School	
		Address: 2720 East Liberty Lane, Phoenix, Arizona 85048	
Building: Main Building			
Homogeneous Area Number	Material Description	Location(s)	Approximate Quantity (sq ft)
231	Black Flex Duct Wrap	Main Office	2,400
232	Insulation for Black Flex Duct Wrap		2,400
233	Skip Trowel Texture Drywall System	Second Level - Corner Rooms Near A16 & B4	150
234	Transite Hood Panel	Second Level - Classrooms	5
235	12" x 12" White w/Gray Specs Vinyl Floor Tile (VCT)	Second Level - Classrooms	7,068
236	Mastic for 12" x 12" White w/Gray Specs VCT		7,068
237	Blue 2" x 2" Vinyl Circle Pattern Tile	Second Level - Exit E - B, C, D, & E	40
238	Mastic for Blue 2" x 2" Vinyl Circle Pattern Tile		40

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District		Campus: Kyrene Akimel A-al Middle School	
		Address: 2720 East Liberty Lane, Phoenix, Arizona 85048	
Building: Concession Building			
Homogeneous Area Number	Material Description	Location(s)	Approximate Quantity (sq ft)
Assumed ACBM			
12	Tan 2" x 2" Ceramic Floor Tile	Restrooms	700
13	Grout for Tan 2" x 2" Ceramic Floor Tile		70
14	Tan w/White Specs 2" x 2" Ceramic Floor Tile	Restrooms	700
15	Grout for Tan w/White Specs 2" x 2" Ceramic Floor Tile		70
16	Tan w/White Specs 1" x 2" Ceramic Floor Tile	Restrooms	700
17	Grout for Tan w/White Specs 1" x 2" Ceramic Floor Tile		70
18	White 4" x 4" Ceramic Cove Base Tile	Restrooms	350
19	Grout for White 4" x 4" Ceramic Cove Base Tile		35
20	Black 2" x 2" Ceramic Wall Tile	Restrooms	700
21	Grout for Black 2" x 2" Ceramic Wall Tile		70
22	Beige 2" x 2" Ceramic Wall Tile	Restrooms	700
23	Grout for Beige 2" x 2" Ceramic Wall Tile		70
24	Counter Caulking	Concession Room	2
25	Interior Frame Caulking	Throughout	3
26	Brown 16" x 8" CMU	Maintenance & Storage	180
27	Mortar for Brown 16" x 8" CMU		180
28	Brown 16" x 4" CMU	Maintenance & Storage	180
29	Mortar for Brown 16" x 4" CMU		180
30	Fixture Caulking	Restrooms	2

SECTION 8



OPERATIONS & MAINTENANCE PLAN

KYRENE ELEMENTARY SCHOOL DISTRICT

OPERATIONS AND MAINTENANCE PLAN

for

ASBESTOS CONTROL

O & M POLICIES AND PROCEDURES

1. INTRODUCTION

Asbestos is a common name for a group of natural minerals that separate into strong, fine fibers when crushed or broken. Its unique fiber properties include tensile strength, thermal insulation, chemical resistance, condensation control, friction resistance, and non-combustibility. Asbestos has been mined from the earth like coal for thousands of years.

The two groups of asbestos are serpentine and amphibole. The three most commonly found asbestos types are:

- * Serpentine chrysotile, known as the "white" asbestos, is found in about 91 percent of all asbestos used in commercial products. It has fine, long, flexible fibers with high tensile strength and is primarily mined in Canada and the Soviet Union.
- * Amphibole amosite, known as the "brown" asbestos, is found in about 8 percent of all asbestos used in commercial products. It has straight, brittle fibers and resists temperatures up through 480 degrees Celsius. It is mined primarily in South Africa.
- * Crocidolite, known as the "blue" asbestos, is found in less than 1 percent of all asbestos used in commercial products. It is the strongest of asbestos with straight and brittle fibers and is also mined in South Africa.

Also included in the amphibole group are anthophyllite, tremolite and actinolite. These types are rarely used in commercial products but may be found as contaminants included in the base ingredients of commercial products.

History

The asbestos industry began in the 1870s when the first commercial chrysotile mine opened in Quebec, Canada. In South Africa, crocidolite was mined in the 1880's while amosite mining began in 1916.

From 1870-1900, asbestos was used in insulation and gaskets. After 1900, its most common use was on steam pipes and boilers in ships. In the 1940's, asbestos was mostly used in the form of mechanical insulation. The three classifications of building materials that contain asbestos include: (1) Thermal System Insulation (TSI), which is mechanical system insulation used to control heat transfer or condensate on plumbing and HVAC systems; (2) Surfacing Material, which is any material sprayed or troweled on surfaces, such as fireproofing, plaster or acoustical applications; (3) Miscellaneous Material, which includes anything which is not TSI or Surfacing, such as roofing, flooring, drywall, or asbestos cement products.

The 1940's marked major changes in the use of asbestos in the United States. Asbestos use was expanded to include architectural finishes. Amosite became widely used for insulation in ships and shipyards. Spray-applied fireproofing materials were largely used in buildings. From 1945 to 1980, it has been estimated that more than half of the large, multi-story buildings constructed contain asbestos spray-applied materials.

Asbestos-Related Diseases

Asbestos fibers enter the body in two ways: (1) inhalation or (2) ingestion. They cannot enter the body by penetrating the skin.

The three main asbestos-related diseases are (1) Lung Cancer, a cancer of the bronchial tube area of the lungs, (2) Asbestosis, a scarring of the lung at the alveoli area which restricts oxygen intake, and (3) Mesothelioma, a tumor or cancer occurring on the tissue which lines the lung area and the intestinal area of the body.

The latency period for asbestos-related diseases is usually 20 - 40 years, depending on the disease. Exposure to asbestos is asymptomatic. While generally not treatable, asbestos diseases are dose-response related and quite preventable (the purpose of a pro-active O & M program).

Asbestos Today

At one time there were over 3,600 commercial products that contained varying amounts of asbestos. The Federal Environmental Protection Agency (EPA) and Occupational Safety and Health Administration (OSHA) estimate that over 2,000 of the 3,600 asbestos containing products were used in a variety of building materials. By 1978 EPA had banned the use of asbestos in any spray application and TSI. However, most other uses of ACM are still allowed.

Asbestos Management In Buildings

The first three steps to manage ACM in a facility are:

- * Identify and determine the extent of the problem,
- * Perform a hazard assessment on each material to determine its potential for asbestos fiber release, and
- * Develop a plan and schedule to deal with ACM in each facility. This is the Asbestos Management Plan.

In the planning process, there are five options to deal with the ACM. They include (1) operations and maintenance (O & M) program, (2) repair, (3) enclosure, (4) encapsulation and (5) removal. While removal of asbestos from facilities is the only permanent option, and will be required at some point of building use, (disturbance by renovation or demolition: see 40 CFR 61 Subpart M, 11/20/90), it is not always the most practical initial option. Often, O & M practices are recommended as the most feasible and economic option that may protect human health and the environment. It should also be noted that any control option other than removal will result in the need for an O & M program to maintain the ACM which is being left in the building until removal is required.

Description of an O & M Plan

An O & M plan is a set of policies, procedures and work practices that are intended to minimize occupant exposure to ACM. The O & M plan is designed to protect workers and other building occupants who work around ACM. A good O & M plan will provide guidance for protection by (1) cleaning-up and repairing any existing contamination from past damage or disturbances, (2)

preventing further release of asbestos fibers through good work practices, and (3) maintaining asbestos in good condition through an effective program of monitoring the condition of ACM and repairing any damage. An O & M Program is proactive.

* All good O & M plans have common elements that include:

- 1 . A Policy Statement
- 1 . Labeling and Notification
- 2 . Training
- 3 . Employee Protection Programs
- 4 . Medical Surveillance Program
- 5 . Special Cleaning
- 6 . Work Permit System
- 7 . Special Work Practices
- 8 . Exposure Monitoring
- 9 . Emergency Response Programs
- 10 . Periodic Surveillance
- 11 . Record Keeping
- 12 . Disposal Of ACM

Technical assistance to develop a complete plan may be needed from building staff, maintenance and custodial personnel, and other journeymen who may work at the facility. Architects, engineers, consultants, contractors, medical advisors, and legal counsel can also be good resources to develop the O & M Plan.

An Operations and Maintenance Plan, to be useful and understandable, must be site specific to each individual building. It should address *specifically* O & M cleaning, repair, and maintenance in areas of asbestos containing building materials (ACBM) at certain locations in the building. For instance, it should not be a general statement on worker protection but should be an ACBM specific statement on work practices and policy.

The O & M Program must be based on a complete and comprehensive building inspection designed to identify and locate *all* the ACBM in a building. Only with this important pre-requisite in place, will an O & M Program be successful in avoiding potential ACM exposure to people and resulting liability to the building owner.

Survey Summary

The O & M Program manual should include a summary of the asbestos survey information. It should include the types of material found to contain asbestos and the locations at which it is to be found. Schematic floor plan drawings can be very helpful in this section.

2. POLICY STATEMENT

Personnel Responsibilities

The success of the O & M plan depends on the active involvement and understanding of all parties. This may range from the facility administration to the manager of the asbestos program and the

building staff. Each facility must ensure all asbestos-related activities are done to comply with relevant federal, state, and local laws. To do this, each facility must designate a person to ensure compliance with relevant laws and the policies and procedures of the O & M manual. This person is known as the Asbestos Program Manager (APM).

In addition, each facility may provide support staff, including a response team, to assist the APM in carrying out his/her responsibilities. Below is a list of job responsibilities assigned for key personnel to develop and implement O & M plans.

Asbestos Program Manager

The APM, or designee, must implement the asbestos control program. As appropriate, responsibilities include the following:

- * Manage the O & M plan; document, update and announce its activities.
- * Notify *all* short-term and outside contractors of the presence, location and quantity of ACM in the facility, and all tenants occupying areas that contain ACM.
- * Maintain and manage the documented inventory of ACM and its location.
- * Review and approve/reject all work permit applications.
- * Participate in the development, review, and monitoring of abatement project designs, and/or repair and alteration projects. Comply with relevant standards and laws when disturbing ACM.
- * Ensure that asbestos projects are documented and record keeping complies with relevant laws and the O & M Manual.
- * Seek technical direction and assistance from a qualified industrial hygienist or environmental services firm. This may be for the program development and implementation, inspection, and reinspection of ACM, and/or personnel training.
- * **It is essential that the APM have the authority to enforce the O & M Program and the support of management to accomplish that.**

Response Team Leader

- * Keep an inventory of equipment and supplies.
- * Check warning labels and replace them as needed.
- * Coordinate and report work and emergency practices.
- * Assist the APM, or designee, with his/her duties.

Response Team

- * Conduct OSHA Class III (small-scale, short duration) activities.
- * Conduct initial and periodic cleaning.
- * Respond to fiber release episodes.
- * Conduct or help conduct periodic surveillance.
- * Assist the APM, or designee, and response team leader with record keeping duties.

Consulting Staff

- * Assist in development and implementation of O & M plan.
- * Enhance the facilities asbestos program through consultation.
- * Perform air monitoring when requested.

3. TRAINING

Federal and/or state OSHA regulations require training of any employee who may come in contact with, disturb, or clean up ACM.

A written plan is vital to provide step-by-step procedures and the documented intent at each facility. To implement and carry out a successful O & M program, a well-designed training program is needed.

Training provides an awareness of the presence of ACM, types of ACM, consequences of disturbing ACM, and proper work practices to minimize release of fibers. Also, training must alert people to the presence of management goals in dealing with ACM and proper procedures in the event of an emergency.

Below is a review of the three training levels which should be required for O & M programs.

OSHA Class IV Training (General Awareness Training)

OSHA requires this level of training for any employee who may come in contact with or clean up previously generated debris containing asbestos. OSHA training is required before an employee conducts this work and annually thereafter.

All custodial and maintenance personnel who work in a building containing ACM should have at least two hours of asbestos awareness training. This training should extend to temporary as well as permanent employees. Training topics include types and uses of asbestos, health effects of exposure, location of ACM in each building they work in, how to recognize damage/deterioration of ACM, the name and telephone number of the APM, or designee, and the availability and location of the facility's Asbestos Inspection Report. This training may be done by the APM or designee, or by an outside trainer. The training required by OSHA is described in EPA's AHERA regulation at 40 CFR 763.92(a)(1).

OSHA Class III Training (Small-Scale, Short Duration Work)

Employees who conduct any activity that may result in the disturbance of ACM should complete an approved 16-hour training course. Topics should include the two-hour awareness, proper handling methods, personal protective equipment, applicable regulations, and hands-on training. A review examination of the training may be useful as a tool to encourage study and understanding of the subjects covered.

The training for each individual must be documented as to date, location, and length of training. This documentation should be preserved in permanent files and new employees must be trained prior to working with ACM. This training is defined in EPA's AHERA regulations at 40 CFR 763.92(a)(2).

Asbestos Program Manager (APM) Training

APMs should receive training in the health effects of asbestos exposure, detection, identification and assessment of ACM, options for controlling ACM, asbestos management programs, and relevant federal, state, and local laws. The extent of this training must be adequate to manage the asbestos issues at the site. It may be as brief as the 16 hour training, or as extensive as accredited courses under EPA's Model Accreditation Program. (It may be useful for the APM to receive training as an EPA Inspector and Management Planner, Project Designer or Contractor/Supervisor).

All training must be documented. Records of all training should be kept for an indefinite period.

Training records/forms must be kept for each person who takes any asbestos-related training. The list below contains training records which must be kept by each facility.

- * For each employee taking the two-hour General Awareness Training complete the **General Awareness Training Form** or equivalent form.
- * For each employee who completes the 16-hour training fill out a **Small-Scale Worker Training Form** or equivalent form.
- * Regardless of the training taken, the APM, or designee should complete and sign an **Asbestos Management Coordinator Training Form** or equivalent form.
- * Also, each facility should require proof of proper training for all outside contractors who handle or come in contact with asbestos in the facility. This documentation for training should be kept in permanent record keeping files for the facility.

AHERA training requirements are discussed in the EPA regulation 40 CFR 763.84 and 763.92. All facilities covered by AHERA should review this regulation to comply with training requirements. OSHA training requirements are found at 29 CFR 1926.1101(k)(9) as Class III and Class IV Training.

Note: Some states and/or local regulatory agencies may differ from these recommendations. Please seek consultation concerning this matter to ensure compliance with regulations.

4. EMPLOYEE PROTECTION

Each facility should develop and implement an employee protection plan to ensure safe work practices for employees handling ACM.

Respiratory Protection

OSHA at 29 CFR 1926.1101 requires respiratory protection when employee exposure levels exceed or may exceed the permissible exposure limit (PEL) as defined below:

- * PEL includes the 8-hour time-weighted average limit (TWA) and the excursion limit (EL).
- * TWA is defined as 0.1 f/cc averaged over eight hours.
- * EL is defined as 1.0 f/cc measured for 30 minutes.

It is not always possible to know the exact employee exposure until after an O & M or small-scale project is done. Therefore, OSHA requires that an initial exposure assessment be conducted before a project begins, to determine any potential exposure to the workers involved (see OSHA at 29 CFR 1926.1101(f). Interim protection with at least a half-face, negative-pressure, air-purifying respirator, equipped with P100 filters should be required, along with protective clothing. A higher level of respiratory protection may be needed for some projects decided on a case-by-case basis.

However, these OSHA exposure levels are compliance triggers only and have no reference to "safe" levels of exposure, nor were they intended to. They are meant only to be levels which could be easily quantified or measured and therefore, demonstrated in a court of law if need be, to enforce a variety of mandated compliance issues.

To better protect workers from exposure and protect building owners and employers from liability, the stated intent of all good Respirator Protection Programs should be to protect workers to *at least* a maximum level of exposure calculated at 0.01 f/cc. The U.S. EPA AHERA regulation, although not mandatory for public and commercial buildings, requires that schools document a "final clearance" air sampling of at least this level before an asbestos abatement area may be reoccupied by unprotected building users.

Each facility should develop and implement a written respiratory program to comply with relevant federal, state, and local laws. The elements for an acceptable respiratory protection program are found at 29 CFR 1910.134©, and include:

1. Procedures for selecting respirators;
2. Medical evaluations of employees required to use respirators;
3. Fit testing procedures for employees required to use respirators;
4. Procedures for proper use of respirators;
5. Procedures and schedules for cleaning, storing and maintaining respirators;
6. Procedures to ensure adequate air for atmosphere-supplying respirators;
7. Training of employees in respiratory hazards;
8. Training of employees in use and limitations of respirators; and
9. Procedures for regular evaluation of the program.

The following OSHA regulations are mandatory as they apply to respirator use in asbestos O & M programs:

- * 29 CFR 1910.134
- * 29 CFR 1926.1101(h)
- * 29 CFR 1926.1101(m)
- * 29 CFR 1926.1101 Appendix D

Personal Protective Equipment

OSHA requires that respirators and protective clothing be used by any employee disturbing ACM (generating visible debris), unless a valid negative exposure assessment is documented for that particular job. This requirement does not extend to Class IV work.

In addition to respirators, each facility should provide and, under most conditions, require the use of protective coveralls, rubber boots or shoe covers, and gloves. Each facility should also provide and require the use of eye protection as needed. If the facility does not use disposable, single-use coveralls, they must abide by regulatory requirements for laundering contaminated clothing. These requirements include, but are not limited to, laundering clothing in such a manner that asbestos fibers are not released and notifying the person doing the laundering that the clothing is asbestos contaminated. The clothing must be transported in properly labeled, sealed, impermeable bags or containers. (See 29 CFR 1926.1101(I)). Although the use of launderable coveralls is allowed by Federal regulations, their use is not recommended. Complete decontamination of cloth is difficult to verify. It is therefore recommended that filtered, breathable coveralls be used, with a tested particulate holdout of at least 98% on 3–5-micron particulate.

Decontamination Procedures

Each facility should ensure that all workers perform proper decontamination procedures following all small-scale and/or O & M projects. These procedures may include, but are not limited to:

- * Vacuuming. The worker must vacuum the disposable coveralls with an HEPA (high efficiency particulate air) vacuum. If a worker is wearing two suits, he/she should use a HEPA vacuum to decontaminate the outer suit and then remove it.
- * Showering. Showering is not required by OSHA and may be used at the discretion of the APM. The worker will proceed to a shower to further decontaminate or to a room to change into street or work clothing.
- * Disposal. In all cases, the worker will dispose of the coveralls and gloves as asbestos-contaminated waste.
- * Respirator Care. The last item a worker will remove is the respirator. Respirators are decontaminated as follows:
 - * Wipe off respirators with a damp cloth prior to removal.
 - * Loosen straps and exhale as the respirator is removed.
 - * Soak filters and dispose of asbestos contaminated waste.
 - * Wash, dry, reassemble, and store respirator according to procedures outlined in each facility's written respirator program.

5. MEDICAL SURVEILLANCE

Medical surveillance is required under the OSHA Construction Standard at 29 CFR 1926.1101(m) for employees working with ACM. Where this regulation is more protective than 29 CFR 1910.134, it takes precedent over it.

Medical Surveillance is required:

- * When employees conduct work for 30 or more days per year that may expose them at or above the PEL (0.1 f/cc); or
- * When they are required to wear negative-pressure respirators.

To determine the need for medical surveillance for employees, each facility should provide an ongoing program of personnel air monitoring when employees perform asbestos work.

Each facility should ensure that employees participate in a medical surveillance program under the situations below:

- * If an employee is handling ACM;
- * If an employee, regardless of their job, meets the criteria specified by the Asbestos Construction Standard as described above; and
- * If an employee, regardless of their job, meets the criteria specified by the Asbestos General Industry Standard, at 29 CFR 1910.1001 (l).

If an employee in the asbestos medical surveillance program has employment terminated for any reason, a final medical exam should be made available within thirty (30) days of termination. No termination exam is needed if the employee has completed an asbestos examination within the previous six (6) months.

Medical surveillance is conducted to comply with relevant federal, state, and local laws.

The following is an example of a written medical surveillance program which may be used to comply with the OSHA regulations, and which must be maintained on the site where the asbestos related O & M work takes place.

MEDICAL SURVEILLANCE PROGRAM

The Medical Surveillance Program for _____ consists of the following main elements:

1. Initial Examination
2. Annual Examination
3. Termination Examination
4. Signed opinion by physician
5. Employee medical record

1. Initial Examination

As required in the OSHA regulations at both 29 CFR 1926.1101 and 29 CFR 1910.1001, all employees who will be assigned to an occupation exposed to airborne asbestos must have an initial examination performed by a licensed physician.

The initial examination may cover the following items:

1. General medical history
2. Initial OSHA Medical Questionnaire
3. Respiratory Measurements
4. Anthropometric Measurements
 - A. Height
 - B. Weight
5. Vital Signs
 - A. Blood Pressure
 - B. Pulse
 - C. Temperature
6. Ophthalmologic Screening
 - A. Visual Acuity - near and far
 - B. Color Vision
 - C. Depth Perception
7. Urinalysis
8. Pulmonary Function Screen
 - A. FEV-1, FVC, FEV1/FCV ratio
9. Chest X-ray
10. Complete physical exam by a licensed physician
11. Physician evaluation for respirator use clearance
12. Report of the medical evaluation.

A copy of the physician approval for occupational respirator use will be maintained on the job site and a copy of the medical exam will be given to the employee. All medical records will be filed and sorted in a safe place indefinitely and for a minimum of 30 years.

2. Annual Examination

All employees who may be exposed to airborne asbestos will undergo an annual medical examination, which will be the same as the Initial Examination, except for the OSHA questionnaire and the X-rays. The OSHA questionnaire will be the abbreviated form for use with annual examinations and the X-rays will be given every five years, except for those employees with 10+ years into the asbestos latency period and 35 to 45 years of age. This X-ray will be given every 2 years. All employees over 45 years of age must have the X-ray annually.

	Years since <u>1st exposure</u>	Age of Employee:		
		<u>15-35</u>	<u>35-45</u>	<u>45+</u>
Frequency	0-10	every 5 yrs.	every 5 yrs.	every 5 yrs.
of X-rays	10+	every 5 yrs.	every 2 yrs.	annually

The annual signed physicians' opinion on fitness for work in a respirator in an asbestos environment will be maintained on the job site and a copy of the annual medical exam will be forwarded to the employee. All medical documentation will be stored and kept indefinitely for a minimum of 30 years.

3. Termination Examination

As per the OSHA standard at 29 CFR 1910.1001(1)(4)(I) and (ii), _____ will provide or make available a termination of employment medical examination for any employee who has been exposed to asbestos. The medical examination will be in accordance with the requirements of the periodic or annual medical examination and will be given, or made available, within 30 calendar days before or after the date of termination of employment.

4. Information provided to Physician

_____ will provide the following information to the examining physician:

1. A copy of the OSHA Regulations at 29 CFR 1926.1101 and Appendices D, E, and I.
2. A description of the employees' duties as they relate to asbestos exposure.
3. The employee's anticipated exposure level.
4. A description of any personal protective and respiratory equipment used.
5. Information from previous medical examinations not otherwise available to the physician.
6. Instructions to the physician not to reveal, in the written opinion given to the employer, specific findings or diagnoses unrelated to occupational exposure to asbestos, without a signed consent form from employee.

A copy of this information will be maintained in the company files and a reference to this information will be included in the medical file on each employee.

5. Physician's Written Opinion

_____ will establish, as a part of its permanent records, a medical surveillance record on each employee. This record will be maintained for the duration of the employment, plus a minimum of 30 years. This record will be made available, upon written request, to OSHA, the affected employee, and former employees or their designated representatives. The employee medical record will contain at least the following information:

1. The name and social security number of the employee.
2. A copy of the employee's medical examination results, including the medical history, questionnaire responses, results of any tests and physicians recommendations.
3. Any employee medical complaints related to asbestos exposure.
4. A copy of or reference to the information provided to the physician by the employer.

Physician Information

This information is for compliance with the OSHA standard at 29 CFR 1926.1101(m)(3) and is to be used as a reference for all medical surveillance exams conducted for _____.

1. The employee's duties will be to work with asbestos containing building materials (ACBM) in an asbestos abatement setting. Various job descriptions are work area preparation, work inside the contaminated area (encapsulation, enclosure, removal), loading, transporting, and unloading of ACBM.
2. The employees' anticipated exposure level range will be from a trace (.001 f/cc) to an anticipated maximum of 10 f/cc. This exposure will vary with the task performed, but will mainly be below the PEL of 0.1 f/cc.
3. The personal protective equipment furnished with the employee will be a respirator, full body covering with disposable coveralls, latex gloves, and rubber boots. Hard hats will be issued when applicable. The respirator system used will be NIOSH approved for the work and will be well within the limits of the OSHA protection factor chart.

The minimum respirator protection usually furnished by _____ is a half-mask air-purifying respirator equipped with P100 cartridges. If the fiber level in the ambient air in the work area ever elevates past 1 f/cc, the respiratory protection will be changed to a full-face air-purifying respirator.

4. According to federal regulations at 29 CFR 1926.1101(m)(4)(ii), the physician is to be instructed by the employer not to reveal in the written opinion given to the employer specific findings or diagnoses unrelated to occupational exposure to asbestos.

6. NOTIFICATION PROCEDURES

A notification program informs employees and building occupants about the presence of ACM in their facility. It shows the steps to take to avoid disturbing ACM. It also informs occupants and employees about what to do and who to contact in case of an asbestos-related emergency.

Notification of occupants can be done through letters, meetings and/or the posting of warning signs and labels. Warning signs and labels can be attached directly to ACM or posted to alert people to a hazard prior to entering an area. It is suggested that new employees receive this information during employee orientation. "Awareness" sessions like those discussed in Section 3 of this manual can also be used.

Each facility must also inform short-term workers and outside contractors who may come in contact with ACM, about the presence of ACM in the facility in which they are working. This step is necessary to avoid the disturbance of ACM during contracted activities, and to comply with the OSHA standard at 29 CFR 1926.1101(k)(2). OSHA requires that the building owner identify, quantify, and locate all ACM, and inform persons who may disturb the material before that disturbance takes place. OSHA holds the building owner responsible for employee exposure to asbestos in a facility, even though the employee does not work for him.

Notification Letters

Each facility should provide notification that complies with relevant federal, state, and local laws. Employees, tenants, and occupants should receive notification containing the details below:

- * The presence and location of asbestos in their facility.
- * The content, location, and availability of the Asbestos Inspection Report and O & M Plan.
- * The health hazards associated with exposure to airborne asbestos fibers.
- * The types of actions that could result in the release of asbestos fibers.
- * The name, location, and phone number of the APM, or designee, in the event of damage or disturbance of ACM.

All contractors and short-term workers, including the telephone company, repair and utility workers and exterminators, are to be notified of the presence of ACM in the facility. The specific location of ACM in the areas where contractors and short-term workers are working is given along with instructions not to disturb any ACM. The APM, or designee, must be consulted prior to any disturbance of ACM. The contractor and short-term workers should sign the Contractor Notification Form, or equivalent form and the Short-term Worker Notification Form, or equivalent form, stating that they have been informed of ACM.

Each facility should instruct the appropriate contractors that no ACM may be installed without prior written approval of the APM, or designee. The contractor must sign a statement certifying that the products they used and/or installed are non-asbestos-containing materials. A Non-Asbestos-Containing Material Certification Form, or equivalent form, is to be signed by each contractor prior to installing products within the facility. This information will save subsequent testing and sampling prior to future maintenance, renovation, and demolition projects that affect this material.

Signs

Danger signs must be posted in regulated areas, as required by OSHA, any time disturbance of ACM is about to take place. To comply with this requirement, each facility must post warning signs at each entrance and exit to an area where O & M activities involving ACM are taking place. O & M activities include initial cleaning, repair, small-scale removal, and emergency response cleanup, regardless of the fiber contamination level.

Warning signs must comply with all relevant federal, state, and local laws and must bear the following:

**DANGER
ASBESTOS
CANCER AND LUNG DISEASE HAZARD
AUTHORIZED PERSONNEL ONLY**

(And where it is required, the sign will also include)

**RESPIRATORS AND PROTECTIVE CLOTHING ARE
REQUIRED IN THIS AREA**

In cases where warning signs are posted because of fiber contamination levels, each facility should document:

- * The location of warning signs.
- * The extent of the contamination.
- * The length of time the signs were posted.
- * The corrective action taken to reduce contamination levels; and
- * Proof of the action's effectiveness (i.e., air samples).

Signs must also be posted at the entrance to any mechanical area, warning of the presence of ACM, with instructions on who to contact before working in the area.

Labels

Each facility should attach warning labels on all mechanical system insulation that has not been sampled and proven not to contain asbestos. In addition, all suspect asbestos containing materials in routine maintenance areas should be labeled:

**DANGER
CONTAINS ASBESTOS FIBER
AVOID CREATING DUST
CANCER AND LUNG DISEASE HAZARD**

All labels must be clearly visible. Labels should be attached at the beginning and end of each continuous pipe run and at least every 75 feet. Extra labels should be required at each valve, flange, or change in direction. Each time a pipe passes through a wall, floor, or ceiling a label should be posted on each side of the penetration.

SAMPLE NOTIFICATION LETTER

Dear Occupants:

As you may be aware, this facility has had an asbestos survey completed and an O & M Program developed. The survey documents the areas that have asbestos containing materials (ACM), and the O & M Program provides the guidance needed to maintain ACM in good condition until its eventual removal. This survey and O & M Program are in the Asbestos Program Manager's office and is available during office hours to anyone for review.

Inhalation of asbestos fibers can be harmful. However, when ACM is maintained in good condition, the potential hazard diminishes, and ACM may be kept in place for the life of the building or until renovation could disturb it.

To avoid exposure, it is **important** to: **(1)** know what types of materials may contain asbestos; **(2)** avoid damaged areas; and **(3)** contact the building management when damaged areas are found so the problem can be immediately remedied. Common applications of asbestos in buildings have included spray-applied fireproofing, soundproofing, or thermal insulation, acoustic plaster soundproofing or ceiling tiles, pipe insulation, asbestos cement products (transite), floor tile and mastic, vinyl sheet flooring and backing, and roofing materials.

Most buildings contain some of these materials, but it is important to realize that not all of them contain asbestos. The survey pinpoints ACM and their locations throughout the building.

To prevent potential release of asbestos fibers, the Asbestos Program Manager must approve any activity that may disturb these materials.

Please call management concerning any damaged areas.

When feasible, we will continue the process of removing asbestos containing materials. All work is done to comply with relevant federal and state laws. Much of the work is done during off hours to further protect building occupants from exposure.

Should you have any questions or comments, please contact the building management.

7. PERIODIC SURVEILLANCE AND REINSPECTION PROGRAM

An important aspect of the O & M program is visual monitoring of ACM, done at set intervals. The purpose of the monitoring is to detect damage or deteriorated ACM as early as possible so that corrective action can be taken.

Custodial and maintenance personnel are instructed to observe the condition of ACM in their area. They are also instructed to report any damage to their supervisor and the APM, or designee, as soon as possible.

Periodic Surveillance

Although no formal training is required by regulatory agencies, it is recommended that person(s) conducting the periodic surveillance receive training and experience beyond the general awareness training. This may include EPA Inspector/Management Planner certification and training on interpreting the facility's Asbestos Assessment Study.

Periodic surveillance documents the condition of all ACM by using a Periodic Surveillance Form. A copy of the form is submitted to the APM, or designee. Periodic surveillance should be done at least every 6 months. This may be more frequent depending on such factors as accessibility, area use, and the type of ACM present.

Schools covered by AHERA are subject to special surveillance programs. The APM, or designee, should consult 40 CFR 763.92(b), for more details.

Reinspection

A complete reinspection of the facility by an accredited Inspector/Management Planner should be accomplished every 3 years and the O & M Plan updated at that time. This reinspection is necessary to keep the O & M Plan updated as to any response actions that may have occurred, and to address any change in the condition of ACBM. Any change in use of an area containing ACM or use of the functional space that contains the ACBM should be noted for purposes of assessment.

In February 1992, EPA published a useful checklist guide for reinspection's titled "A Guide to Performing Reinspection Under The Asbestos Hazard Emergency Response Act (AHERA)" (EPA 77/B-92/001). The guide may be obtained by calling EPA's Toxics Hotline at (202) 554-1404.

8. EXPOSURE MONITORING

Air monitoring can be a useful tool to further evaluate the condition of ACM and its potential to release asbestos fibers. Air sampling, when done correctly, may provide early warning about any deterioration of ACM. To be meaningful, air monitoring is done over a long period of time throughout the entire building under normal use conditions.

Periodic Area Monitoring

Periodic air monitoring in a building is merely a supplement to an ACM surveillance program. Each facility may conduct periodic monitoring in buildings with friable ACM found in conjunction with air plenums, in areas of significant air movement, and in areas with significant vibration.

Air sampling is recommended on a regular basis, appropriate for the specific conditions as referenced above. The samples may be analyzed using either phase contrast microscopy (PCM) or transmission electron microscopy (TEM), or a combination of both. Each method has advantages and disadvantages.

	<u>Advantages</u>	<u>Disadvantages</u>
PCM	Standardized procedures Quick (less than 1 hour) Less Expensive	Sees only long &/or fat fibers; Can't distinguish between asbestos and non-asbestos fibers
TEM	Standardized procedures Sees thin &/or short fibers Distinguishes between asbestos and non-asbestos fibers	Slow (more than 6 hours) Expensive

Employee Exposure Monitoring

Each facility should provide an employee exposure monitoring plan to comply with relevant federal, state, and local laws. Although OSHA allows the use of previously generated data (see 29 CFR 1926.1101(f)) in place of actual employee air monitoring, air monitoring of employees should be done in order to better design work practices which not only protect the employee from exposure, but also protect the facility from potential contamination. The data, which this air monitoring generates, should be preserved in the permanent record in order to protect the employer or building owner from any future liability. However, even though employee air monitoring is done, a formal negative exposure assessment must document each disturbance or clean up of ACM.

9. WORK PERMIT SYSTEM

Each facility should implement a "work permit" program to control indiscriminate disturbance from maintenance, renovation, and remodel work. It is also recommended that a "work permit" program be designed to control other asbestos-related activities. A sample program is outlined below. If the facility contracts for asbestos-related activities, this task could be included in the bid specification and/or contract documents. The APM, or designee, may choose another person to assist in implementation and coordination.

The "work permit" system requires any person doing work impacting building materials in the facility to submit a Job Request Form, or equivalent form, to the APM, or designee, prior to doing any work. This form would identify the specific personnel who do the work, including outside contractors, and would describe:

- * the time and location of the job in question;
- * the type of job; and
- * any known information about the presence of ACM.

Once the APM, or designee, receives the Job Request Form, the steps below are taken:

- * Review data. Review the Asbestos Inspection Report and any other records to determine whether or not any asbestos will be affected by the job. If ACM is unlikely to be disturbed, the APM, or designee, will note the presence of ACM on the form. The APM, or designee, will instruct the proper people not to disturb the ACM and the steps to take in the unlikely event of a disturbance.
- * Visit the site. Make a site visit of the proposed work if it is determined that ACM is present and likely to be disturbed. The APM, or designee does the site visit.
- * Plan work practices. Comply with the O & M plan and all relevant federal, state, and local laws to minimize disturbance of ACM. If not found in the O & M manual, document the work practices to be used and add them to the O & M plan. New procedures must comply with all aspects of the O & M plan and relevant laws.
- * Record information. Use a "Maintenance Work Authorization Form", or equivalent form, and send to the proper personnel. Provide a copy to any outside contractor involved in the work.
- * Revisit the worksite. Visit the work site during the job. Document any observations on an "Evaluation of Work Form", or equivalent form. See that the work practices being used comply with the OSHA standard at a minimum.
- * Filing. Place a copy of the forms listed above in the permanent files.

This work permit system is the key to avoiding accidental exposure to workers or contamination of the facility. It is therefore essential that the APM have the authority to enforce the program.

10. RECORD KEEPING

The purpose of record keeping is to document information regarding each facility's O & M activities. A well-maintained and organized system of record keeping will demonstrate that the health and safety of those working or visiting each facility was not compromised.

A benefit of a comprehensive, organized record keeping program is that renovation of a facility is easier because of historical documentation. Also, the complex legal issues involved with asbestos make record keeping especially important.

Each facility should keep the following, or equivalent, records:

ACTIVITYRECORDS

O & M work done by outside
Contractors

Copy of training documents
Copy of Respirator Protection Program
Copy of Medical Surveillance Program
Final Clearance Documentation

Notification to occupants

Copy of notification letter or minutes, etc.

Notification to short-term
Workers

Short-term Notification Record
Everything listed for outside contractors

Training

OSHA Class IV (General Awareness)
OSHA Class III (Small-scale, short duration work)
Respirator Training
Hazard Communication Training

Medical Surveillance

Physician's Written Opinion
Name & SSN of employee
Employee complaint, re-exposure
Copy of information to physician

Respiratory Protection

Copy of training program
Respirator Inspection Form
Fit-test Record
Copy of Respirator Protection Program

Periodic Surveillance

Periodic Surveillance Record

Re-Inspections

Re-inspection Record and Report

O & M Activities

Job Request Form
Job Authorization Form
Visual Inspection Report
Notification to Regulators

Emergencies

Emergency Record

Fiber Release Episodes

Fiber Release Record

Transportation of Waste

Chain-of-custody Form
Dump Receipts
Hazardous Waste Manifest

Each facility also keeps records of all major abatement operations such as enclosure, encapsulation, and removal. The asbestos consultant and/or the abatement contractor may supply these records. The records below may be kept as part of abatement records:

- * The contract documents including specifications, RFPs, and scope of work;
- * The abatement contract qualifications;
- * The abatement contractor submittals, including those specified in contract documents;
- * The asbestos consultant qualifications;
- * The asbestos laboratory qualifications including QA/QC plans;
- * The results of analysis of all air samples;
- * Contractor logbooks;
- * The laboratory QA/QC records; and
- * All final reports from consultant.

The APM, or designee, is responsible for keeping records. The APM, or designee, may need the assistance of clerical and maintenance staff to fulfill record keeping duties. At minimum, record keeping must meet relevant federal, state, and local laws.

<u>RECORDS</u>	<u>RETENTION</u>
* Medical surveillance	Employment + 30 years
* Air Sampling/Employee Exposure Monitoring	30 years
* Training	Employment + year (Recommended: 30 years)
* Respiratory Protection (Inspections, fit-tests, and training)	30 years
* All other records	30 years

Schools covered by AHERA are subject to additional record keeping requirements. The APM or designee should consult 40 CFR 763.94 for more information.

SAMPLE FORMS

TABLE OF CONTENTS

	<u>Page</u>
Class IV (General Asbestos Awareness) Training Form.....	23
Class III (Small-Scale Worker) Training Form	24
Contractor Notification Form	25
Short-Term Worker Notification Form.....	26
Periodic Surveillance Form.....	27
Job Request Form	28
Maintenance Work Authorization Form.....	29
ACM Work Evaluation Form	30
Initial and Periodic Cleaning Form.....	31
Fiber Release Episode Report.....	32
Respirator Training Record.....	33
Medical/Safety Letter.....	35
Medical Authorization for Respirator Use.....	38

APM:

APM:

**CONTRACTOR
NOTIFICATION FORM**

To comply with relevant federal and state laws, and the Facilities Operations and Maintenance Policies and Procedures, Facility will provide the Contractor with data regarding the locations of asbestos-containing material (ACM). This will be done prior to the Contractor entering any building under the facility's jurisdiction.

Please complete this form and return to:

I, _____, representing and having authority for (company), hereby indicate and agree that a representative of _____ (name and title), has provided me information regarding the specific locations and materials that are asbestos-containing and which may be encountered or have the potential of being encountered during the course of activities on project _____ (name or number) in (building).

I agree that neither I, nor any of my employees, agent, subcontractors, or other individuals or entities over whom I have any responsibility or control will disturb ACM as found in the Asbestos Survey for the above-mentioned building.

I further understand and agree that should I, my employees, agents, subcontractors or other individuals or entities over whom I have control, encounter any material(s) suspected of containing asbestos, said material(s) shall not be disturbed without first notifying the agency's Asbestos Program Manager, or appointed designee, and receiving approval that such material may be disturbed.

Print Name

Signature

Company _____

Position _____

Date _____

**SHORT-TERM WORKER
NOTIFICATION FORM**

FACILITY:

BUILDING NAME OR NUMBER WHERE WORK IS TO BE PERFORMED:

DESCRIPTION OF WORK TO BE PERFORMED:

DATE WORK TO BE PERFORMED:

NAME OF PERSON PERFORMING WORK:

I have reviewed the facility's Asbestos Survey regarding the location(s) of asbestos-containing material (ACM) and have been cautioned against any disturbance and damage of these materials.

If my work requires the disturbance or damage of any ACM, or if I accidentally disturb or damage the material, I will stop my work and immediately inform the Asbestos program manager, or appointed designee.

Print Name

Signature

Company _____

Position _____

Date _____

PERIODIC SURVEILLANCE FORM

BUILDING INFORMATION:

Building Number: _____ Building

Name:

Location:

AREA INFORMATION:

Number: _____ Location:

Changes in Condition:

MATERIAL INFORMATION:

COMMENTS:

INSPECTED ON: _____ BY: _____ (Please Print)

SIGNATURE: _____ :

JOB REQUEST FORM

SUBMIT APPLICATION TO ASBESTOS PROGRAM MANAGER, OR APPOINTED
DESIGNEE. DO NOT BEGIN WORK UNTIL AUTHORIZATION IS RECEIVED.

NAME: _____ DATE: _____

NUMBER: _____ REQUEST NUMBER: _____

START DATE: _____

ANTICIPATED FINISH DATE: _____

LOCATION OF WORK: _____

WILL ASBESTOS-CONTAINING MATERIALS BE AFFECTED? ____ YES ____ NO

NAME AND TELEPHONE NUMBER OF SUPERVISOR: _____

APM COMMENTS: _____

SIGNATURE: _____

Asbestos Program Manager
(or appointed designee)

DATE: _____

FACILITY: _____

(Print or type)

APM: _____

(Print or type)

**MAINTENANCE WORK
AUTHORIZATION FORM**

FACILITY: _____ NO. _____

AUTHORIZATION IS GIVEN TO PROCEED WITH THE FOLLOWING MAINTENANCE-WORK:

PRESENCE OF ASBESTOS-CONTAINING MATERIAL (ACM):

- _____ ACM IS NOT PRESENT IN THE VICINITY OF THE MAINTENANCE WORK
- _____ ACM IS PRESENT BUT DISTURBANCE IS UNLIKELY. HOWEVER, IF
CONDITIONS CHANGE, THE APM WILL RE-EVALUATE THE WORK REQUEST
PRIOR TO PROCEEDING.
- _____ ACM IS PRESENT AND MAY BE DISTURBED.

THE FOLLOWING WORK PRACTICES SHALL BE EMPLOYED TO AVOID OR

MINIMIZE DISTURBANCE OF ACM: _____

THE FOLLOWING PROTECTIVE EQUIPMENT SHALL BE USED/WORN DURING THE

WORK TO PROTECT WORKERS: _____

SPECIAL PRACTICES AND/OR EQUIPMENT REQUIRED: _____

SIGNATURE: _____

Asbestos Program Manager
(or appointed designee)

DATE: _____

**ACM WORK
EVALUATION FORM**

FACILITY:

LOCATION OF WORK PERFORMED:

DATE OF WORK:

APPROVAL FORM NO:

DESCRIPTION OF WORK:

EVALUATION OF WORK PREFORMED:

EVALUATION OF EQUIPMENT & PROCEDURES TO PROTECT WORKERS:

AIR SAMPLE RESULTS

NAME: _____

RESULTS:

NAME: _____

RESULTS:

NAME: _____

RESULTS:

STORAGE LOCATION:

DISPOSAL SITE:

DATE:

SIGNED: _____

DATE:

Asbestos Program Manager
(or appointed designee)

**INITIAL AND PERIODIC
CLEANING FORM**

FACILITY:

BUILDING NAME:

TYPE OF CLEANING: _____ INITIAL _____ PERIODIC _____ OTHER

NAME OF PEOPLE PERFORMING CLEANING:

CLEANING METHODS (CHECK METHODS USED)

____ HEPA VACUUMED ____ WET METHODS ____ PROPER DISPOSAL

____ PROTECTIVE EQUIPMENT USED

WRITTEN DESCRIPTION OF CLEANING METHODS:

LOCATION OF CLEANING:

RESPONSE TEAM LEADER CERTIFIES THAT THE ABOVE CLEANING WAS DONE TO COMPLY WITH THE RELEVANT FEDERAL AND STATE LAWS AND THE FACILITIES MANUAL.

Print Name	Signature	Date

CONTRACTOR REPRESENTATIVE CERTIFIES THAT THE ABOVE CLEANING WAS DONE TO COMPLY WITH THE FACILITIES CLEANING SPECIFICATIONS/ REQUIREMENTS.

Print Name	Signature	Date

Asbestos Program Manager:

Print Name	Signature	Date

**FIBER RELEASE EPISODE (UNCONTROLLED RELEASE)
REPORT**

FACILITY:

LOCATION OF FIBER RELEASE (BUILDING NAME, ADDRESS, ROOM NUMBER):

NAME OF PERSON REPORTING THE RELEASE:

DATE OF RELEASE:

DESCRIBE THE EPISODE:

DESCRIBE CLEAN-UP PROCEDURES:

NAME OF PERSON(S) CLEANING UP RELEASE:

ARE THEY CERTIFIED ASBESTOS WORKERS? ____ YES ____ NO

IF YES, WHAT ARE THE CERTIFICATION NUMBERS?

Signed: _____ Date: _____
Asbestos Program Manager
(or appointed designee)

RESPIRATOR TRAINING RECORD

Employee Name: _____

Date: _____

The following has been discussed with me:

1. The nature of the respiratory hazard.
2. Why engineering controls cannot be used in place of respiratory equipment.
3. The reasons why I must wear the respirator, and the disciplinary actions that will be taken for intentional incorrect wear.
4. What type of respirator will be used for particular hazards.
5. The limitations and capabilities of each respirator.
6. Purpose of the medical evaluation to determine authorization for respirator use.
7. The conditions that prevent a good face seal.
8. The necessity of wearing the respirator as instructed, without modification.
9. Recognizing and handling emergency situations when wearing a respirator.

I have been instructed in the following:

1. How to wear a respirator.
2. How to adjust a respirator.
3. How to determine a proper fit and to perform a fit-check every time I put on a negative-pressure, air-purifying respirator.
4. How to inspect the respirator.
5. How to clean the respirator.
6. How to store the respirator.

I understand the above items concerning respirator use, care, and inspection.

Signature

Date

Witness

Make and Model of respirator:

Type of Mask:

Fit-Testing Method

___ Quantitative Fit Test

___ Banana Oil Test

___ Irritant Smoke

___ Saccharin Test

___ Positive-Pressure Fit-Check

___ Negative-Pressure Fit-Check

Respirator Size

___ Small

___ Medium

___ Large

Employee's Signature

Fitter's Signature

MEDICAL/SAFETY LETTER

To Whom It May Concern:

The following is a description of our employee's duties as they relate to the employee's exposure to airborne asbestos.

_____ is a _____ in our facility's maintenance department.

His/Her primary asbestos-related job duties include the following:

- * Small-scale, short-duration activities.
- * Minor fiber release episode clean-ups.
- * Initial cleaning.

OSHA Class III (small-scale, short-duration) Activity:

Our employee may perform small-scale, short-duration asbestos abatement activities. Normally, this work involves tasks such as, but not limited to:

- * Removal, encapsulation, enclosure, or repair of asbestos-containing materials in small quantities.
- * Replacement of asbestos-containing gaskets on valves and other items.
- * Installation of electrical conduits or other items through or proximate to asbestos-containing materials.

The anticipated exposure levels while working on small-scale, short-duration activities is expected to be below 0.1 fibers per cubic centimeter (f/cc) based on an 8-hour TWA. Of course, our employees are required to wear a negative-pressure respirator and disposable coveralls, at a minimum, every time that they handle ACM.

Minor Fiber Release Episodes:

Our employee may perform clean-up of minor fiber releases. The anticipated exposure levels while cleaning up a minor fiber release episode is expected to be below 0.1 f/cc based on an 8-hour TWA. Our employees are required to wear, at a minimum, a negative-pressure respirator and disposable clothing while performing this work.

Initial Cleaning:

Our employee may perform initial cleaning in buildings with friable ACM. The anticipated exposure levels while clean-up of a minor fiber release episode is expected to be below 0.1 f/cc based on an 8-hour TWA. Our employees are required to wear, at a minimum, a negative-pressure respirator and disposable clothing while performing this work.

If information from the previous medical examination of the employee is available, this information will be brought to the exam with the employee.

A copy of the following OSHA regulations has also been provided:

- * 29 CFR 1926.58
- * Appendix D
- * Appendix E
- * Appendix I

Important note to physician:

To comply with regulation 1926.58 of OSHA, the physician shall not reveal in the written opinion given to the employer, specific findings or diagnoses unrelated to occupation exposure to asbestos, tremolite, anthophyllite, or actinolite.

If you have any questions or concerns regarding this information, please contact me at the below address or phone:

Name

Phone

Street

City

State

Zip

Agency

Facility

=====

Documentation

Name of Clinic

Phone

Street

City

State

Zip

Signature of Clinic Representative

Date

Signature of Employee

Date

MEDICAL AUTHORIZATION FOR RESPIRATOR USE

Employer:

Employee:

Social Security Number:

Date of Birth:

Supervisor

Department

Circle Types of Respirator(s) to Be Used:

Atmosphere-supplying respirator	Continuous-flow respirator
Open-circuit SCBA	Closed-circuit SCBA
Supplies-air respirator	Combination air-line SCBA
Air-purifying (non-powered)	Air-purifying (powered)

Level of Work Effort (Mark one)

____ Light ____ Moderate ____ Heavy ____ Strenuous

Extent of Use

1. On a daily basis
2. Occasionally - but more than once a week
3. Rarely - or for emergency situations only

Length of Time of Anticipated Effort in Hours:

Special Work Considerations (i.e., high places, temperature, hazardous material, protective clothing, etc.) If none, state "none".

Asbestos Program Manager Signature
(or appointed designee)

Date

Employee:

Have you ever worn a respirator before? ____ Yes ____ No

If yes, describe any difficulties noted with respirator use:

Employee Signature

Date

MEDICAL AUTHORIZATION FOR RESPIRATOR USE (CONT.)

Physician's Evaluation:

CLASS: 1. No Restrictions on respirator use
(Circle) 2. Some specific use restrictions
3. No respirator use permitted

Restrictions:

Examining Physician's Signature: _____ Date: _____

11. WORK PRACTICES

Work practices in each of the three areas addressed in this section should be specific to the ACBM located in the facility, and to the functional spaces (room/area) which contain the ACBM.

A. Special Cleaning

All initial and periodic or additional cleaning areas of friable or damaged ACBM must be done with wet methods, HEPA vacuums, steam cleaners or a combination of those methods. The training program should impress on the maintenance and custodial staff the importance of *never* using conventional vacuums to clean up asbestos contaminated debris, and *never* dry sweep or dust in contaminated environments. Initial cleaning should be done in protective coveralls and respirators, with proper decontamination procedures being followed upon completion. All waste or debris should be treated as asbestos and properly disposed of. For regulatory guidance, see AHERA at 40 CFR 763.91(c) and OSHA at 29 CFR 1926.1101(g)(10) and (l)(1)&(2).

These special cleaning procedures will also apply to any clean up after an uncontrolled fiber release episode.

B. Emergency Response

An accidental contamination or "fiber release episode" may be addressed in one of two ways, depending on the size of the episode. For small or "minor" fiber release episodes (i.e., the falling or dislodging of 3 square or linear feet or less of friable ACBM), the custodial or maintenance people trained in the 16-hour O & M procedures may address cleanup in the following manner:

1. Turn off the HVAC system in the area.
2. Thoroughly saturate the debris.
3. Clean the area using the methods mentioned in A above.
4. Dispose of all debris as asbestos using the methods in Chapter 11.
5. Immediately repair the damages to the ACBM.

For larger or "major" fiber release episodes (i.e., the falling or dislodging of more than 3 square or linear feet), the custodial or maintenance people trained in the 16-hour O & M procedures may only:

1. Restrict entry in the area and post signs.
2. Turn off the HVAC system.
3. Contact the accredited outside contractor or in-house emergency response team.

The clean-up of a major fiber release episode should include planning, special work practices (see OSHA at 29 CFR 1926.1101), final clearance documentation, and record keeping of a major asbestos abatement project.

C. Maintenance Work Practices

The user of this document should be familiar with all the major federal requirements for conducting asbestos related maintenance work (OSHA 29 CFR 1926.1101(g)(9) &(10); AHERA 40 CFR 763, Subpart E, Appendix B; NESHAP 40 CFR 61.145 and 61.150 where applicable) and design his work procedures within the intent of these rules and guidelines. If more stringent safeguards are needed to protect workers and the facility, they should be researched and implemented.

An enormous amount of this research specific to O & M work procedures has already been completed by a panel of over 100 experts under the guidance of the National Institute of Building Sciences (NIBS). NIBS has produced a "Guidance Manual, Asbestos Operations and Maintenance Work Practices" which details approximately 125 O & M work procedures step by step. Also included are sections on Asbestos Program Manager and asbestos worker procedures preparatory to these work practices. To duplicate any of this work here would be redundant and probably inadequate, as the work procedures must necessarily be specific to both the ACBM being addressed and the exposure element involved.

The APM is urged to obtain a copy of the NIBS guide and use it in the design and execution of the work to be addressed at each particular site. NIBS may be contacted at: National Institute of Building Sciences, 1201 L street, N.W., Suite 400, Washington, DC 20005, or by telephone at (202) 289-7800.

12. DISPOSAL/STORAGE REQUIREMENTS

The following section explains the federal requirements for storage and disposal of asbestos-containing waste. Although the federal regulations will not normally apply to maintenance amounts of generated asbestos waste, they should be used as guidelines for liability management. *Please consult with the state and local regulatory agencies if more stringent requirements apply.*

1. GENERATOR REQUIREMENTS

The term "Generator" refers to the owner or operator of the facility or the owner or operator of the demolition/renovation operator or both. The generator is legally responsible and liable for the proper handling, storage and disposal of all ACM abated from the building(s) and/or property. Refer to the NESHAP requirements at 40 CFR 61.150 for the federal requirements.

2. HANDLING OF ASBESTOS WASTE

The generator must discharge no visible emissions during collection, processing, packaging, or transportation of the waste. To accomplish this requirement, the generator must adequately wet the waste material and seal it while wet in leak tight containers or wrapping. The containers must be labeled with the following 3 labels:

(OSHA)

**DANGER
CONTAINS ASBESTOS FIBERS
CANCER AND LUNG DISEASE HAZARD
AVOID BREATHING AIRBORNE ASBESTOS FIBERS**

(DOT)

**RQ ASBESTOS
NA 2212
CLASS 9**

(EPA)

**Name and address of generator
(site specific)**

Although not specified by federal law, 6 mil. poly bags are normally used where applicable as a minimal level of compliance.

3. DISPOSAL

All asbestos-containing waste should be deposited as soon as is practical at a waste site approved by the state NESHAP agency. Vehicles used to transport the waste must be marked during loading and unloading with the following sign:

**DANGER
ASBESTOS DUST HAZARD
CANCER AND LUNG DISEASE HAZARD
AUTHORIZED PERSONNEL ONLY**

4. ON-SITE STORAGE

In some instances, the generator cannot arrange for prompt off-site transportation of the asbestos waste. Also, it may not be economically feasible for a generator to provide transportation until substantial waste has been generated. However, there may be local regulations which govern how long the waste may be stored on-site. The limit for storing waste on-site in most states is 3 months to one year beginning on the date the asbestos waste is generated. It is advisable, but not required, to place the disposal bags in impermeable containers (i.e., steel, fiberboard, or fiberglass drums). The date of generation should be marked on the outside of the containers. If the storage vessels are also deemed for disposal, the appropriate labels must be affixed to the outside of the container.

5. WASTE SHIPMENT RECORD

A "Waste Shipment Record" must be sent with the waste transporter to the disposal site, containing the following information:

- A. Name, address, and telephone of Generator
- B. Name and address of local NESHAP authority
- C. Approximate quantity in cubic yards
- D. Name and telephone of disposal site operator
- E. Name and site location of disposal site
- F. Date transported
- G. Name, address, and telephone of transporter
- H. Certification of compliance

If a signed copy is not received back from the disposal site within 35 days, the transporter, and/or disposal site must be contacted for information. If the signed copy is then not received within 45 days of shipment, the local or regional EPA must be contacted in writing. All waste shipment records must be retained for at least 2 years. An example of a waste shipment records form and instructions are provided.

Waste Shipment Record

(1) Work Site Name

Mailing Address

Owner's Name

Owner's Telephone Number

(2) Operator's Name and address

Operator's Telephone Number

(3) Waste Disposal Site (WDS) Name and Mailing Address

Physical Site Location

WDS Telephone Number

(4) Name, and address of responsible agency

(5) Description of Materials

(6) Containers: Number and type

(7) Total quantity m³ (yd³)

(8) Special handling instructions and additional information:

(9) Operators Certification: I hereby declare that the contents of this consignment are fully and accurately described above by proper shipping name and are classified, packed, marked, and labeled, and are in all respects in proper condition for transport by highway according to applicable international and government regulations.

Printed/typed name & title

Signature

Date

(10) Transporter 1 (Acknowledgment of receipt of materials):

Printed/typed name & title

Signature

Date:

Address and telephone number

(11) Transporter 2 (Acknowledgment of receipt of materials)

Printed/typed name & title

Signature

Date

Address and telephone number

(12) Discrepancies:

(13) Waste disposal site owner or operator: Certification of receipt of asbestos materials covered by this manifest except as noted in item 12.

Printed/typed name & title

Signature

Date

Instructions

Waste Generator Section (Items 1-9)

1. Enter the name of the facility at which asbestos waste is generated and the address where the facility is located. In the appropriate spaces, also enter the name of the owner of the facility and the owner's phone number.
2. If a demolition or renovation, enter the name and address of the company and authorized agent responsible for performing the asbestos removal. In the appropriate spaces, also enter the phone number of the operator.
3. Enter the name, address, and physical site location of the waste disposal site (WDS) that will be receiving the asbestos materials. In the appropriate spaces, also enter the phone number of the WDS. Enter "on-site" if the waste will be disposed of on the generator's property.
4. Provide the name and address of the local, state, or EPA regional office responsible for administering the asbestos NESHAP program.
5. Indicate the types of asbestos waste materials generated. If from a demolition or renovation, indicate the amount of asbestos that is:
 - * Friable asbestos material
 - * Non-friable asbestos material
6. Enter the number of containers used to transport the asbestos materials in item 5. Also enter one of the following container codes used in transporting each type of asbestos material (specify any other type of container used if not listed below):
 - * DM - Metal drums, barrels
 - * DP - Plastic drums, barrels
 - * BA - 6 mil plastic bags or wrapping
7. Enter the quantities of each type of asbestos material removed in units of cubic meters (cubic yards).
8. Use this space to indicate special transportation, treatment, storage, disposal, or bill of lading information. If an alternate waste disposal site is designated, note it here. Emergency response telephone numbers or similar information may be included here.
9. The authorized agent of the waste generator must read and then sign and date this certification. The date is the date of receipt by transporter.

*NOTE: The waste generator must retain a copy of this form.

Transporter Section (Items 10 & 11)

10,11. Enter the name, address, and telephone number of each transporter used, if applicable. Print or type the full name and title of the person accepting responsibility and acknowledging receipt of materials as listed on this waste shipment record for transport. Enter date of receipt and signature.

* NOTE: The transporter must retain a copy of this form.

Disposal Site Section (Items 12 & 13)

12. The authorized representative of the WDS must note in this space any discrepancy between waste described on this manifest and waste received as well as any improperly enclosed or contained waste. Any rejected materials should be listed, and the destination of those materials provided. A site that converts asbestos-containing waste material to non-asbestos material is considered a WDS.
13. The signature (by hand) of the authorized WDS agent includes acceptance and agreement with statements on this manifest except as noted in item 12. The date is the date of signature and receipt of shipment.

Note: This WDS must retain a completed copy of this form. The WDS must also send a completed copy to the operator listed in item 2.

13. COST ESTIMATES OF CLEANING EQUIPMENT

The list below includes enough equipment for small-scale abatement jobs. Most facilities will not need as much equipment and, therefore, much of this equipment is optional. This section will not be applicable to facilities that do not have an in-house program for small-scale abatement.

<u>One Time Purchase</u>	<u>Character</u>	<u>Costs</u>
HEPA vacuum	w/1.5" attachments	1600.00
Full face respirator		141.00
Half face respirator		18.00
Personal monitor kit	8 hrs. at max. capacity	285.00
Mister - hand held	quart	1.50
with tank	3 gallon	35.00
Caution signs	12 or more (10 x 14")	3.85
Extension cord	100 feet	15.00
Ground fault circuit interrupter		15.00
Nylon brushes	5	32.52

Disposable Materials/Cleaning Supplies

Filters: HEPA Vacuum	12-gallon capacity	65.00
paper vacuum	microfilter	7.50
HEPA respirator	case of 10	22.50
Vacuum bags	6 mil polyethylene	34.65
Wet wipe cloths	20 x 40" case of 300	10.00
Muslin	10 square yards	16.20
Cheese cloth	10 square yards	7.00
Latex gloves	box of 100	62.00
5-micron water pump filter		3.50

Abatement Supplies

Surfactant	5 gallons	45.00
Encapsulant	lag kote	40.72
	lag kloth	75.50
Duct tape	2" case of 24	87.00
Protective disposable		
clothing with hooded, zipping		
type, booties	case of 25	43.00
6 mil polyethylene		
plastic bags	22 x 50" case	45.00
polyethylene	20 x 100' rolls	27.00
Glove bags	44 x 60" case of 25	90.00
Razor knives	10	35.00
Wire saws	10	15.00
Scrapers	10	77.70
Wire cutters	10	75.00
Chisel rock hammer	1	25.00

14. TERMS AND ABBREVIATIONS

ACBM - Asbestos Containing Building Materials.

Accessible - When referring to ACM, accessible means the material is subject to disturbance by building occupants, custodial, or maintenance personnel in the course of their normal activities.

Accredited or Accreditation - Refers to a person, firm, or laboratory having met the requirements found in Section 206 of Title II of the AHERA Act.

ACM - Asbestos Containing Materials.

Acoustical Material - Material which often contains Asbestos, Vermiculite, and Perlites that has been applied to ceilings or walls to dampen sound.

AHERA - The Asbestos Hazard Emergency Response Act of 1986 (40 CFR Part 763). Final rule as published in the Federal Register, Vol. 52, No. 210.

Air Plenums - A space above a ceiling used to circulate or condition air throughout the adjacent areas.

Air Samples - Samples of airborne fibers taken by drawing air through an appropriate filter media which traps the fibers. This sample is then analyzed by polarized light or electron microscopy.

Amosite - Brown asbestos, with brittle fibers often used for extreme thermal conditions.

APM - Asbestos Program Manager.

Approved Shower - A shower used for decontamination, with wastewater filtered down to the 5 micron range, and capable of supplying hot water at a temperature of 100 degrees F. or greater.

APR - Air-purifying respirator.

Asbestos - A naturally occurring mineral which includes chrysotile, actinolite, anthophyllite, tremolite, or crocidolite in fibrous structure, or any combination of these that have been chemically treated or altered, as determined by polarized light microscopy (PLM).

Asbestos Containing Material (ACM) - When referring to a building means any material or product that contains greater than 1% of asbestos.

Asbestos Containing Building Materials (ACBM) - is surfacing ACM, thermal ACM, or miscellaneous ACM that is found in or on the structural members of a building.

Asbestos Debris - Pieces of ACBM that can be identified by color, texture, or fiber content as originating from adjacent ACM.

Asbestos Fiber - Is any fiber of chrysotile, actinolite, amosite, tremolite, anthophyllite, crocidolite at least 5 micrometers in length and with a length-to-width ratio (aspect) of greater than 3 to 1.

Asbestos Management Plan - A document to assist in administering the asbestos program in a facility, that includes recommendations for response to ACM in the building, and which includes the O & M Program.

Asbestosis - A chronic disease during which the lungs become scarred because of a biological reaction to the inhalation of asbestos fibers.

ASHAA - Asbestos School Hazard Abatement Act of 1984. A funding vehicle for schools.

Authorized Person - Is any person authorized by an employer and required by work duties to be present in regulated area or activities.

Bulk Samples - Samples of suspect asbestos containing material. These samples are then analyzed by Polarized Light Microscopy (PLM).

CFR - Code of Federal Regulations.

Chrysotile - White asbestos, fine, silky, flexible fibers with high tensile strength.

Clean Room - Is an uncontaminated room having facilities for the storage of employees' street clothing and uncontaminated supplies and equipment.

Competent Person - Is a person capable of identifying existing asbestos hazards in the workplace and who has the authority to take prompt corrective measures.

Condition Factors - A description of the ACM's condition.

Crawl Space - An area of a building only a few feet high, often below the building level, but above the ground.

Crocidolite - Blue asbestos, has brittle fibers.

Decontamination Area - Is an enclosed area adjacent and connected to the work area consisting of an equipment room, shower area, and clean room which are used for the decontamination of personnel, equipment, and materials.

Demolition – As regulated by the NESHAP, means the wrecking or taking out of any load-supporting structural member. It generally should be interpreted as wrecking the structure or leveling the site.

Doffing - The action of taking off personal protective equipment.

Donning - The action of putting on personal protective equipment.

Employee Exposure - Exposure to airborne asbestos, actinolite, tremolite, anthophyllite, or any combination of these minerals that would occur if the employees were not wearing respiratory protection.

Encapsulation - The treatment of ACM/ACBM in place in a building with a liquid material that bridges or penetrates the asbestos fibers in an adhesive matrix to prevent the release of those fibers.

Bridging - Encapsulation technique that creates a membrane on the ACM surface.

Penetration - Encapsulation technique where the encapsulating mixture penetrates the ACM material and binds its components together.

Enclosure - Is an airtight, impermeable, permanent mechanical barrier around or over ACM/ACBM to prevent the release of asbestos into the air.

Equipment Room - A contaminated room located within the decontamination area, that is supplied with impermeable bags for the disposal of contaminated personal protective clothing and equipment. Usually called the “dirty” room.

F/CC - Fibers per cubic centimeter. A measurement to express the level of fibers in the air.

Facility - Is any institutional, commercial, public, industrial, or residential structure, installation or building; any ship; any active or inactive waste disposal sites. Defines a facility where NESHAP applies. A single residential building no larger than 4 dwelling units is not a facility.

Facility Component - Any pipe, duct, boiler, tank, reactor, turbine or furnace at or in a facility; or any structural members of a facility.

Fiber Release Episode - Is any uncontrolled or unintentional disturbance of ACM/ACBM that results in a visible emission.

Fibrils - A small bundle of individual fibers.

Fireproofing - Material sprayed or troweled onto facility components or structural members to prevent or retard their loss of strength during a fire. Often contains asbestos.

Fit-testing - The action, either by qualitative or quantitative measurement, of ensuring a respirator has a proper seal to the workers' face and is functioning properly.

Friable - Easily crumbled by hand pressure or material that has been made friable.

Friable Asbestos Containing Material - Is any material, containing greater the 1% asbestos, that can be crumpled, pulverized, or reduced to powder, when dry, by hand pressure.

Glove bag - A poly bag used to remove pipe insulation.

Hazard - Is any circumstance, mechanism, or event which has the potential to create injury or loss.

HEPA – High Efficiency Particulate Air. This prefix to the word “filter” defines a level of filter efficiency capable of trapping and retaining at least 99.97% of all mono-dispersed fibers greater than 0.3 micrometers in diameter.

Homogeneous Area - An area that is determined to be uniform in color, texture, depth, content, or age.

Inadvertent Contamination - The disturbance of ACM/ACBM not caused intentionally by individuals or parties involved in the project.

Inspection - The process of locating ACM, determining its condition, and reporting the results. This inspection is the basis of the management plan.

Latency - The period of a disease without manifestation of symptoms. The length of time between exposure and diagnosis.

Magnesia - A type of thermal insulation, usually white and often pre-formed into squares or rectangles, often contains asbestos.

Mechanical Area - An area of a facility not normally accessed by the public; often contains HVAC equipment, boilers, heat exchangers, tanks, pipes, ducts, and other mechanical equipment.

Medical Surveillance Program - A program to ensure that personnel are physically and psychologically able to wear respiratory protection equipment and are able to perform asbestos related activities.

Mesothelioma - A cancer of the lining of the lungs (pleural) or abdominal (peritoneal) cavity.

Miscellaneous ACM - Miscellaneous material that contains greater than 1% asbestos.

Miscellaneous Material - Building materials that are not thermal system or surfacing material.

MSDS - Material Safety Data Sheets. A technical document or report that provides precautions, protective measures, chemical makeup (active ingredients), and steps to take after a release. A primary source of information concerning chemical hazards.

Mudded Joint Fittings - Plaster compound packed onto pipe joints and around valves, tees, and pumps for thermal insulation; often contains asbestos; also called "hard-cast fittings".

Negative Air - A reduced pressure, or pressure differential process where the air pressure in the work area is less than that outside the work area. The differential is measured in inches of water column (vacuum).

NESHAP - National Emission Standards for Hazardous Air Pollutants.

NIOSH - National Institute of Occupational Safety and Health. The agency that sets the standards for respirators and other protective equipment.

Non-friable - That material in a building which when dry may not be crumbled, pulverized, or reduced to powder by hand pressure.

O & M - Operations and Maintenance.

Operations and Maintenance Program (O & M) - A program aimed at maintaining friable ACM/ACBM through training, awareness, and standardized work practices. An outreach of a comprehensive O & M program is the cleanup and repair of previously damaged ACM, as well as the prevention of further damage.

OSHA - The Occupational Safety and Health Administration of the United States Department of Labor.

Outside Air - The air outside the regulated area; often called "ambient".

Packing - Material used as gasketing in valves; often contains asbestos.

PAPR - Powered Air Purifying Respirator.

PCM - Phase Contrast Microscopy. A method used to analyze air samples for the presence of airborne fibers. **PEL** - Permissible Exposure Limit. A level of airborne asbestos above which no unprotected employee shall be exposed. Currently the PEL (Federal) is 0.1 f/cc of air as an 8-hour Time Weighted Average, and an Excursion Limit of 1.0 f/cc measured for 30 minutes. See 29 CFR 1926.1101.

Planned Renovation - Facility work such as remodel, or asbestos removal, which has been planned.

PLM - Polarized Light Microscopy. A method used to analyze bulk samples for the presence of asbestos.

Potential Damage - Circumstances in which:

1. Friable ACBM is in an area regularly used by building occupants, including maintenance personnel, in the course of their normal duties, and
2. There are indications that there is a reasonable likelihood that the material or its covering will become damaged, deteriorated, or delaminated due to factors such as changes in building use, changes in operations and maintenance practices, changes in occupancy, or recurrent damage.

Preventive Measures – As used in the AHERA regulation, a preventive measure is a response to non-friable ACM and/or small scale, short duration work on ACM. It is also used as a recommended remedy for friable or TSI in good condition but about to become significantly damaged.

Regulated Areas – An area in which Class I, II or III asbestos work is done. It must be posted with regulatory posting and administered by a competent person.

Re-Inspection - A re-evaluation of the ACM's condition once every three years by an accredited inspector.

Removal - A response action where the asbestos is stripped or permanently removed

Renovation - Is the modification of any existing structure or portion thereof where exposure to airborne asbestos may result.

Repair - Is the restructuring, overhauling, rebuilding, or reconditioning of structures or surfaces where asbestos is present. Repair is a response action under AHERA, requiring certified persons to design and conduct the work.

Respirator - A device worn over the mouth and nose to prevent the inhalation of noxious substances.

Respiratory Protection Plan - A program to provide the information, training, and equipment necessary for proper respiratory protection while working with ACM.

Response Action - Methods of controlling asbestos that include Repair, Removal, Encapsulation, O & M, or Enclosure. A response action is a response to friable material or TSI, bigger than maintenance, and inside the building.

Routine Maintenance Area - An area, such as a boiler room or mechanical room, not normally frequented by the public in which maintenance employees or contract workers regularly conduct maintenance activities.

SEM - Scanning Electron Microscopy. A method to analyze air or bulk samples for the presence of asbestos.

Serpentine - A major classification of asbestos minerals. Chrysotile is serpentine asbestos.

Surfacing Material - That material which is sprayed-on, troweled-on, or otherwise applied as acoustical plaster, fireproofing, or as decorative finishes.

TEM - Transmission Electron Microscopy. Currently the most definite analysis method for the determination of asbestos presence in air, water, or bulk samples.

Thermal System Insulation - Material applied to pipes, fittings, boilers, interior mechanical structures, and ducts to prevent heat loss or gain, condensation or for other purposes. TSI is mechanical system insulation.

TSCA - Toxic Substance Control Act.

TWA - Time Weighted Average. An average concentration of material over an 8 hour time period.

TYVEK - A brand name for non-breathable disposable clothing worn while working with asbestos.

USEPA - United States Environmental Protection Agency. The agency charged with implementing AHERA and NESHAP.


Visible Emissions - Any emissions, which are visually detectable without special instruments coming from asbestos containing material. Visible emissions include trash on the ground and water leaking out of containers.

Wet Cleaning - A cleaning technique where the material is kept wet, and/or towels or mops are used to reduce the potential of the material becoming airborne.

SECTION 9



EXAMPLE OF INITIAL & ANNUAL NOTIFICATION



DOMINION

EXAMPLE OF INITIAL AND ANNUAL NOTIFICATION LETTER

March 11, 2025

To Whom It May Concern,

In accordance with the Asbestos Hazard Emergency Response Act (AHERA), accredited building inspectors have completed an asbestos inspection of the Kyrene Akimel A-al Middle School campus, located at 2720 East Liberty Lane in Phoenix, Arizona. The inspection, performed February 11, 2025, was conducted in accordance with the Environmental Protection Agency's (EPA) Rule "Asbestos-Containing Materials in Schools", 40 CFR Part 763.

Samples of suspect asbestos-containing materials were collected during the inspection and were submitted to a laboratory for analysis.

A copy of the inspection report for the buildings on the Kyrene Akimel A-al Middle School campus, as well as the periodic surveillance records and the site's Management Plan are kept at the District LEA's office. An additional copy of the previously referenced documents is available during normal business hours from 8:00 a.m. to 5:00 p.m. in the Administrative Office of Kyrene Akimel A-al Middle School

Sincerely,

Kyrene Elementary School District

SECTION 10



COST ESTIMATION

KYRENE ELEMENTARY SCHOOL DISTRICT
Kyrene Akimel A-al Middle School

RESOURCE EVALUATION		
Reinspection Costs / Year	Estimated Years	Totals
\$1,200.00	20	\$24,000.00
O & M / Year	Estimated Years	Totals
\$500.00	20	\$10,000.00
6 Month Periodic Surveillance / Year	Estimated Years	Totals
\$2,400.00	20	\$48,000.00

Training/ Year	Training Cost/Year	Estimated Years	
2 Hour Initial Training Class	10 Staff Members @ \$150.00 ea. = \$1,500.00	20	\$30,000.00
16 Hour Initial Training Class	2 Staff Members @ \$250.00 ea. = \$500.00	20	\$10,000.00
Refresher Class	12 Staff Members @ \$150.00 ea = \$1,800.00	20	\$36,000.00

Total Annual Cost	\$7,900.00
Total Cost Over Life of O & M	\$158,000.00
Cost of Removal at End of Building Life	\$1,307,164.00
Total Cost at End of Building Life	\$1,465,164.00

KYRENE ELEMENTARY SCHOOL DISTRICT
Kyrene Akimel A-al Middle School

COST ESTIMATION

Asbestos-Containing Building Materials	Location	Estimated Quantity	Cost (per Sq. Ft.)	Estimated Removal Cost
Brown 16" x 8" CMU	Main Bldg	6,000	\$5.00	\$ 30,000.00
Mortar for Brown 16" x 8" CMU	Main Bldg	6,000	\$5.00	\$ 30,000.00
Brown 16" x 3" CMU	Main Bldg	6,000	\$5.00	\$ 30,000.00
Mortar for Brown 16" x 3" CMU	Main Bldg	6,000	\$5.00	\$ 30,000.00
Brown 16" x 3" Decorative CMU	Main Bldg	600	\$5.00	\$ 3,000.00
Mortar for Brown 16" x 3" Decorative CMU	Main Bldg	600	\$5.00	\$ 3,000.00
Clear 6" x 6" Block Grout	Main Bldg	150	\$3.00	\$ 450.00
Brown Door Sealant	Main Bldg	330	\$3.00	\$ 990.00
Floor Expansion Joint	Main Bldg	10,000	\$6.00	\$ 60,000.00
Off-White 12" x 12" Ceramic Floor Tile	Main Bldg	2,200	\$5.00	\$ 11,000.00
Grout for Off-White 12" x 12" Ceramic Floor Tile	Main Bldg	220	\$3.00	\$ 660.00
Blue 12" x 12" Ceramic Floor Tile	Main Bldg	800	\$5.00	\$ 4,000.00
Grout for Blue 12" x 12" Ceramic Floor Tile	Main Bldg	80	\$3.00	\$ 240.00
Fixture Caulking	Main Bldg	5	\$3.00	\$ 15.00
Off-White 2" x 2" Ceramic Floor Tile	Main Bldg	1,800	\$5.00	\$ 9,000.00
Grout for Off-White 2" x 2" Ceramic Floor Tile	Main Bldg	180	\$3.00	\$ 540.00
Tan 2" x 2" Ceramic Floor Tile	Main Bldg	1,800	\$5.00	\$ 9,000.00
Grout for Tan 2" x 2" Ceramic Floor Tile	Main Bldg	180	\$3.00	\$ 540.00
Tan 1' x 1' Ceramic Floor Tile	Main Bldg	1,800	\$5.00	\$ 9,000.00
Grout for Tan 1' x 1' Ceramic Floor Tile	Main Bldg	180	\$3.00	\$ 540.00
White 4" x 4" Ceramic Wall Tile	Main Bldg	1,800	\$5.00	\$ 9,000.00
Grout for White 4" x 4" Ceramic Wall Tile	Main Bldg	180	\$3.00	\$ 540.00
White 4" x 4" Ceramic Cove Base Tile	Main Bldg	1,800	\$5.00	\$ 9,000.00
Grout for White 4" x 4" Ceramic Cove Base Tile	Main Bldg	180	\$3.00	\$ 540.00
Black 2" x 2" Ceramic Wall Tile	Main Bldg	1,800	\$5.00	\$ 9,000.00
Grout for Black 4" x 4" Ceramic Wall Tile	Main Bldg	180	\$3.00	\$ 540.00
Beige 2" x 2" Ceramic Wall Tile	Main Bldg	1,800	\$5.00	\$ 9,000.00
Grout for Beige 2" x 2" Ceramic Wall Tile	Main Bldg	180	\$3.00	\$ 540.00
Tac Board Wrap	Main Bldg	10,000	\$5.00	\$ 50,000.00
Mastic for Tac Board Wrap	Main Bldg	10,000	\$5.00	\$ 50,000.00
Light Brown w/Black Specs 12" x 12" Vinyl Floor Tile (VCT)	Main Bldg	2,000	\$5.00	\$ 10,000.00
Mastic for Light Brown w/ Black Specs 12" x 12" VCT	Main Bldg	2,000	\$5.00	\$ 10,000.00
Blue w/Black Specs 12" x 12" Vinyl Floor Tile (VCT)	Main Bldg	2,750	\$5.00	\$ 13,750.00
Mastic for Blue w/Black Specs 12" x 12"	Main Bldg	2,750	\$5.00	\$ 13,750.00
Tan w/Beige Specs 12" x 12" Vinyl Floor Tile (VCT)	Main Bldg	2,750	\$5.00	\$ 13,750.00

KYRENE ELEMENTARY SCHOOL DISTRICT
Kyrene Akimel A-al Middle School

COST ESTIMATION

Asbestos-Containing Building Materials	Location	Estimated Quantity	Cost (per Sq. Ft.)	Estimated Removal Cost
Mastic for Tan w/Beige Specs 12" x 12"	Main Bldg	2,750	\$5.00	\$ 13,750.00
Black Sink Coating	Main Bldg	8	\$3.00	\$ 24.00
2' x 2' Replacement Ceiling Tile	Main Bldg	5,250	\$5.00	\$ 26,250.00
Black L-Shaped Cove Base	Main Bldg	370	\$5.00	\$ 1,850.00
Mastic for Black L-Shaped Cove Base	Main Bldg	370	\$5.00	\$ 1,850.00
White Flex Connect Damper	Main Bldg	20	\$4.00	\$ 80.00
Brown 4" x 4" Ceramic Wall Tile	Main Bldg	50	\$5.00	\$ 250.00
Grout for Brown 4" x 4" Ceramic Wall Tile	Main Bldg	5	\$3.00	\$ 15.00
White Paneling	Main Bldg	525	\$4.00	\$ 2,100.00
Mastic for White Paneling	Main Bldg	525	\$5.00	\$ 2,625.00
Gray 12" x 12" Texture Ceramic Tile	Main Bldg	5,250	\$5.00	\$ 26,250.00
Grout for Gray 12" x 12" Texture Ceramic Tile	Main Bldg	525	\$3.00	\$ 1,575.00
White Smooth 2' x 2' Ceiling Tile	Main Bldg	250	\$5.00	\$ 1,250.00
Tan Smooth 2' x 2' Ceiling Tile	Main Bldg	10	\$5.00	\$ 50.00
Silver Caulking	Main Bldg	30	\$3.00	\$ 90.00
White Smooth 2' x 4' Ceiling Tile	Main Bldg	1,900	\$5.00	\$ 9,500.00
Beige 12" x 12" Ceramic Floor Tile	Main Bldg	25	\$5.00	\$ 125.00
Grout for Beige 12" x 12" Ceramic Floor Tile	Main Bldg	2	\$3.00	\$ 6.00
Black/White Texture 12" x 12" Ceramic Floor Tile	Main Bldg	3	\$5.00	\$ 15.00
Grout for Black/White Texture 12" x 12" Ceramic Floor Tile	Main Bldg	3	\$5.00	\$ 15.00
Off-White 6" x 4" Ceramic Cove Base	Main Bldg	34	\$5.00	\$ 170.00
Grout for Off-White 6" x 4" Ceramic Cove Base	Main Bldg	3	\$3.00	\$ 9.00
Blackw/White Specs 12" x 12" Vinyl Floor Tile (VCT)	Main Bldg	2,100	\$5.00	\$ 10,500.00
Mastic for Blackw/White Specs 12" x 12" VCT	Main Bldg	21	\$5.00	\$ 105.00
Blue 54" x 12" Vinyl w/ Circle Pattern	Main Bldg	50	\$5.00	\$ 250.00
Mastic for Blue 54" x 12" Vinyl w/ Circle Pattern	Main Bldg	50	\$5.00	\$ 250.00
Black/Gray Sink Coating	Main Bldg	5	\$3.00	\$ 15.00
2' x 4' Ceiling Tile w/ Pin Holes	Main Bldg	550	\$5.00	\$ 2,750.00
Counter Caulking	Main Bldg	210	\$3.00	\$ 630.00
Cabinet Caulking	Main Bldg	210	\$3.00	\$ 630.00
Interior Frame Caulking	Main Bldg	330	\$3.00	\$ 990.00
Concrete Foundation	Main Bldg	40,500	\$6.00	\$ 243,000.00
Gray 2" x 2" Ceramic Floor Tile	Main Bldg	40	\$5.00	\$ 200.00
Grout for Gray 2" x 2" Ceramic Floor Tile	Main Bldg	4	\$3.00	\$ 12.00

KYRENE ELEMENTARY SCHOOL DISTRICT
Kyrene Akimel A-al Middle School

COST ESTIMATION

Asbestos-Containing Building Materials	Location	Estimated Quantity	Cost (per Sq. Ft.)	Estimated Removal Cost
New White Fiberglass Reinforced Plastic (FRP)	Main Bldg	224	\$5.00	\$ 1,120.00
Mastic for New White Fiberglass Reinforced Plastic	Main Bldg	22	\$5.00	\$ 110.00
White w/Black Specs 12" x 12" Vinyl Floor Tile (VCT)	Main Bldg	4,800	\$5.00	\$ 24,000.00
Mastic for White w/Black Specs 12" x 12" VCT	Main Bldg	4,800	\$5.00	\$ 24,000.00
White Ceiling Wrap	Main Bldg	2,400	\$3.00	\$ 7,200.00
Insulation for White Ceiling Wrap	Main Bldg	2,400	\$5.00	\$ 12,000.00
White Pipe Wrap	Main Bldg	2,400	\$3.00	\$ 7,200.00
Insulation for White Pipe Wrap	Main Bldg	2,400	\$5.00	\$ 12,000.00
Ceiling Plaster	Main Bldg	5,000	\$6.00	\$ 30,000.00
Silver Ceiling Wrap	Main Bldg	5,000	\$3.00	\$ 15,000.00
Insulation for Silver Ceiling Wrap	Main Bldg	5,000	\$5.00	\$ 25,000.00
Red Fire Stop Caulking	Main Bldg	250	\$3.00	\$ 750.00
Silver Flex Duct Wrap	Main Bldg	5,000	\$3.00	\$ 15,000.00
Insulation for Silver Flex Duct Wrap	Main Bldg	5,000	\$5.00	\$ 25,000.00
Untextured Drywall System	Main Bldg	5,000	\$10.00	\$ 50,000.00
Blue 4" x 4" Ceramic Cove Base Tile	Main Bldg	120	\$5.00	\$ 600.00
Grout for Blue 4" x 4" Ceramic Cove Base Tile	Main Bldg	12	\$3.00	\$ 36.00
Fiberglass Reinforced Plastic (FRP)	Main Bldg	40	\$5.00	\$ 200.00
Mastic for Fiberglass Reinforced Plastic (FRP)	Main Bldg	40	\$5.00	\$ 200.00
Mop Sink Caulking	Main Bldg	5	\$3.00	\$ 15.00
White 6" x 6" Ceramic Cove Base	Main Bldg	140	\$5.00	\$ 700.00
Grout for White 6" x 6" Ceramic Cove Base	Main Bldg	4	\$3.00	\$ 12.00
Black Window Sealant	Main Bldg	30	\$3.00	\$ 90.00
Gray Duct Mastic	Main Bldg	5,000	\$3.00	\$ 15,000.00
Silver Duct Wrap	Main Bldg	5,000	\$3.00	\$ 15,000.00
Insulation for Silver Duct Wrap	Main Bldg	5,000	\$5.00	\$ 25,000.00
White Duct Mastic	Main Bldg	5,000	\$3.00	\$ 15,000.00
Black 2' x 2' Carpet	Main Bldg	6,180	\$5.00	\$ 30,900.00
Mastic for Black 2' x 2' Carpet	Main Bldg	6,180	\$5.00	\$ 30,900.00
9" x 9" Black Grout	Main Bldg	150	\$3.00	\$ 450.00
Gray Window Sealant	Main Bldg	30	\$3.00	\$ 90.00
Gray Door Sealant	Main Bldg	30	\$3.00	\$ 90.00
White w/Gray Specs 12" x 12" Vinyl Floor Tile (VCT)	Main Bldg	400	\$5.00	\$ 2,000.00
Mastic for White w/Gray Specs 12" x 12" VCT	Main Bldg	400	\$5.00	\$ 2,000.00
Beige Rough Texture Wallpaper	Main Bldg	80	\$6.00	\$ 480.00

KYRENE ELEMENTARY SCHOOL DISTRICT
Kyrene Akimel A-al Middle School

COST ESTIMATION

Asbestos-Containing Building Materials	Location	Estimated Quantity	Cost (per Sq. Ft.)	Estimated Removal Cost
Blue 16" x 16" Vinyl Circle Pattern Tile	Main Bldg	300	\$5.00	\$ 1,500.00
Mastic for Blue 16" x 16" Vinyl Circle Pattern Tile	Main Bldg	300	\$5.00	\$ 1,500.00
Blue 48" x 12" Blue Vinyl Floor Tile (VCT)	Main Bldg	1,545	\$5.00	\$ 7,725.00
Mastic for Blue 48" x 12" Blue VCT	Main Bldg	1,545	\$5.00	\$ 7,725.00
Brown 18" x 6" CMU	Main Bldg	3,090	\$5.00	\$ 15,450.00
Mortar for Brown 18" x 6" CMU	Main Bldg	3,090	\$5.00	\$ 15,450.00
Black Flex Duct Wrap	Main Bldg	2,400	\$3.00	\$ 7,200.00
Insulation for Black Flex Duct Wrap	Main Bldg	2,400	\$5.00	\$ 12,000.00
Skip Trowel Texture Drywall System	Main Bldg	150	\$12.00	\$ 1,800.00
Transite Hood Panel	Main Bldg	5	\$5.00	\$ 25.00
12" x 12" White w/Gray Specs Vinyl Floor Tile (VCT)	Main Bldg	7,068	\$5.00	\$ 35,340.00
Mastic for 12" x 12" White w/Gray Specs VCT	Main Bldg	7,068	\$5.00	\$ 35,340.00
Blue 2" x 2" Vinyl Circle Pattern Tile	Main Bldg	40	\$5.00	\$ 200.00
Mastic for Blue 2" x 2" Vinyl Circle Pattern Tile	Main Bldg	40	\$5.00	\$ 200.00
Total Estimated Cost				\$1,307,164.00

SECTION 11



MANAGEMENT PLANNER
OPTIONAL COMPLIANCE STATEMENT

**Optional Management Planner
Compliance Statement**
763.93(f)


I certify that I have prepared and/or reviewed this Management Plan and that such plan is in compliance with the Asbestos Hazard Emergency Response Act at 40 CFR 763, Subpart E.

I also certify that I have no financial connection with any party who implements or will implement this Management Plan.

Printed Name: Basilio Marcos

Date: March 11, 2025

Signature: _____



State of Accreditation or EPA: EPA AHERA Management Planner - Arizona

Accreditation Date: June 19, 2024 - June 19, 2025

Accreditation Number: ON-4651-1419-061924

THE ASBESTOS INSTITUTE

Certifies that

Basilio Marcos

has attended and received instruction in the EPA approved course

AHERA Management Planner Refresher

on

June 19, 2024

and successfully completed and passed the competency exam.

Certificate:

ON-4651-1419-061924

Date of Examination:

19-Jun-2024

Date of Expiration:

19-Jun-2025



William T. Cavness
Director



Approved Instructor

THE ASBESTOS INSTITUTE

20033 N. 19th Ave, Building 6, Phoenix, AZ 85027

602-864-6564 – www.theasbestosinstitute.com

The person receiving this certificate has completed the requisite training for asbestos accreditation under TSCA Title II.

SECTION 12



SIGNED STATEMENT BY
DESIGNATED PERSON

Local Education Agency (LEA) General Responsibilities Under AHERA

Pursuant to Section 763.84 and Section 763.93 of the EPA Asbestos in Schools Regulations (40 CFR, Part 763), each management plan must contain a true and correct statement signed by the LEA designated person, that certifies that the general LEA responsibilities have been met. This form is provided to assist you in complying with this portion of AHERA.

LEA Name: _____

LEA Address: _____

Designated Person Name: _____

Designated Person Address: _____

ASSURANCES

1. This AHERA management plan was developed and has been submitted pursuant to the Asbestos Hazard Emergency Response Act of 1986, Public Law 99-915; and the United States Environmental Protection Agency Rule: Asbestos Containing Material in Schools, 40 CFR, Part 763; and the undersigned does hereby certify that the LEA has and will ensure the following:
2. The activities of any persons who perform inspections, reinspections and periodic surveillance, develop and update management plans, and develop and implement response actions, including operations and maintenance, are carried out in accordance with Part 763.
3. All custodial and maintenance employees are properly trained as required in Part 763 and all other applicable Federal and/or State regulations (e.g., the Occupational Safety and Health Administration Asbestos Standard for Construction, the EPA Worker Protection Rule or applicable state regulations).
4. All workers and building occupants, or their legal guardians, are informed at least once each school year about inspections, response actions, post-response action activities, including period reinspection and surveillance activities, that are planned or in progress.
5. All short-term workers (e.g., telephone repair workers, utility workers or exterminators) who may come in contact with asbestos in a school are provided information regarding the locations of ACM and suspected ACM assumed to be ACM.
6. All warning labels are posted in accordance with Section 763.95.
7. All management plans are available for inspection and notification of such availability has been provided as specified in the management plan under Section 763.93(g).
8. The undersigned person designated by the LEA pursuant to Section 763.84 (g)(1) has received adequate training as stipulated in Section 763.84(g)(2).
9. The LEA has and will consider whether any conflict of interest may arise from the interrelationship among accredited personnel and whether that should influence the selection of accredited personnel to perform activities under Part 763.

SIGNATURE _____ DATE _____

LEA Designated Person, pursuant to
40 CFR 763.93(i) and 763.84.