



Addendum #1

Date:	<u>March 31, 2025</u>	W&H Project:	<u>Audio Visual Systems</u>
Type:	<u>Addendum</u>	Project #:	<u>25-NPS-AVS-01</u>
Client:	<u>Northville Public Schools</u>	Project Mgr:	<u>Rob Richcreek</u>

Project Timelines:

1. **Revision:** Timetables
 - a. RFB Available for Contractors March 12, 2025
 - b. Contractor Questions Due March 26, 2025, by 12:00 PM
 - c. Answers Due April 2, 2025, by 5:00 PM
 - d. Bids Due Date April 9, 2025, at 2:00 PM at Old Village School
 - e. Award to Contractor April 26, 2025
 - f. Start Date May 4, 2025
 - g. Completion Date August 22, 2025 (Cooke, Moraine, Ridge Wood, Silver Springs, Thornton Creek, Winchester)
 - h. Completion Date See Phasing Drawings (Amerman, Meads Mill)

Project Bid Information:

1. RFB forms review:
 - a. Base Bid requirements- Tab sequencing
 - b. Breakdown by Building
 - c. Complete Bill of Materials with line-item pricing
 - d. Bid Forms review- including Voluntary Alternates
 - e. Bid Bond
 - f. Familial Disclosure Form
 - g. Iran Economic Sanctions Form
2. Section 4 review and clarifications:
 - a. Working hours 7am-4pm Mon-Fri (Summer)
 - b. Working hours 3:30pm-11:00pm Mon-Fri (School working hours)
 - c. Drawings and Schematics Review
 - d. Products/Equipment Review
 - e. Project phasing for Amerman and Meads Mill

Project Clarifications:

1. RFB- Page 27. Section I e. Delete Northville High School from the scope of work. (RFB not reissued).

2. Project phasing drawings for Amerman Elementary School and Meads Mill Middle School are Attached in this Addendum.

3. Revised Bid Form included in this Addendum. This shall replace the form released in the RFB.

4. Cooke School Gymnasium:

- a. Delete replacement of AV system in its entirety. All existing equipment is to be reused.
- b. Remove one (of two) existing microphone jacks (i.e labeled "Mic 2") currently located in the rack on a single space rack panel. Cover the existing hole or replace the 1RU rack panel with Middle Atlantic UNI-1-C Universal connector panel, or equivalent. Retain the jack name designation (i.e. Mic 1) on the rack mounted jack.
- c. Install a new, properly labeled microphone jack (i.e. "Mic 2") on the wall opposite the rack utilizing specified Wiremold raceway and RDL surface box. Extend cabling to the Mic.2 input on the existing Crestron DMPS3-4K-150-C Presentation System.

5. Cooke School Cafeteria:

- a. Delete replacement of the existing AV system in its entirety. All existing equipment is to be reused.
- b. Remove one (of two) existing microphone jacks (i.e labeled "Mic 2") currently located in the rack on a single space rack panel. Cover the existing hole or replace the 1RU rack panel with Middle Atlantic UNI-1-C Universal connector panel or equivalent. Retain the jack name designation (i.e. Mic 1) on the rack mounted jack.
- c. Install a new, properly labeled microphone jack (i.e. "Mic 2") on the wall opposite the rack utilizing specified Wiremold raceway and RDL surface box. Extend cabling to the Mic 2 input on the existing Crestron DMPS3-4K-150-C Presentation System.
- d. Replace existing flush mount electric screen. Ceiling grid reconfiguration will be provided by others. Utilize Dalite #34614 164" Diagonal Tensioned Advantage series with DaMat screen surface as basis of bid. Confirm to be viable for this location prior to ordering. Electrical power to be final-connected by others.

6. General:

- a. Remove and dispose of all existing speakers and cabling, unless otherwise noted on drawings and/or RFB.

Contractor Questions and Answers:

1. After verification with Audio Technica, it has been determined that the AT System 10 series has been discontinued. The replacement is the System 20 Pro. Should we use this series specification for replacement of the System 10 Pro?

Answer: Please use the System 20 Pro for the newly added microphones. It may be desirable to move some of the existing System 10 systems to other buildings so as to have consistent models in each system, where possible. Assume there will need to be some location reassignments of the existing systems to meet this goal, where possible

2. Can you please confirm that new microphones are only required in the following locations: Amerman Café & Gym, Moraine Gym, Ridgewood Gym, Silver Springs Gym, Winchester Gym, Cooke School Gym.

Answer: That is correct.

3. The Denon DN-700CB has been discontinued, should we use the Tascam CD-200BT as the replacement.

Answer: Replace with a Denon DN-300Z . Add a Pixel Technologies AFHD-4 AM/FM antenna mounted externally to the building facing Southeast +/- 45 degrees. Provide plenum RG-6 cable where required. An inside building location can be used if it can be demonstrated this location picks up all local AM and FM stations

4. Can you please clarify the idea of the wired mic & plates as listed in 4.11 (F) 4-7?

Answer: Item 5 stands as is. Items 4,6, and 7 are the components to provide a wall mounted plate in the cafeterias to hang a handheld microphone utilizing the mic clip that comes with the microphone such that a microphone is easily accessible during lunch periods. Install this plate near the existing location of this item near a Mic jack on the front of the proscenium.

5. Are these inputs to the system that are being connected into one of the mic input plates on the block flow diagrams?

Answer: See answer to question #4.

6. What is the Atlas Sound AD-12BE supposed to connect to as this is just a flange?

Answer: See answer to question #4.

7. Is the stainless-steel wall plate just the cover for the DS-XLR3F mic jack?

Answer: See answer to question #4.

8. In the gym spaces how are the microphone jacks to be mounted? Should we be using the RDL SMB-1W boxes with Wiremold which are surface mount boxes? Are these boxes not a hazard in a gym space?

Answer: The Contractor shall use the RDL SMB-1W boxes with Wiremold raceway. Some of the existing boxes may be accessible and reusable but this is not verifiable at this time.

9. Are new racks required in all locations? If not, what locations get new racks?

Answer: All locations are to receive new racks.

10. Page 32 4.12(E): These jacks are listed as being Stainless steel, are these mic jacks to be different from the similar ones specified for the rest of the project listed on Page 30 4.11 (V) 1 & 2?

Answer: Yes.

11. Page 31 4.12 (A) this calls for a Soundcraft Ui16;n however, the drawing TA114 shows a QSC Core 110 audio processor. Please clarify.

Answer: Please replace this piece of equipment with a Soundcraft EPM12 Analog Mixer.

12. What locations are going to be provided with flush mounted boxes as it pertains to the A/V Equipment.

Answer: See answer to Question #6.

13. Is the intention of the (4) JBL CBT speakers in these cafeteria spaces for coverage or power?

Answer: Power over the normal lunch hour noise.

14. Would (2) CBT 1000 speakers be acceptable as a Voluntary alternate?

Yes- the CBT 1000 speakers are an acceptable Voluntary Alternate, however, the Base Bid speakers specified must be quoted before a voluntary alternate is considered.


15. Is there intention that the screen control be part of the control system or was it intended just to have a separate Low Voltage Screen control switch located by the screen/stage?

Answer: Both.

End of document

Renovation Phasing Plan

AS	ART STUDIO	M	MECHANICAL
BL	BOILER ROOM	MC	MEDIA CENTER
C	CLASSROOM	MO	MAIN OFFICE
CA	CAFETERIA	MU	MUSIC ROOM
CB	COLLAB	O	OFFICE
CF	CONFERENCE	RL	RELAXATION ROOM
CL	CLINIC	RR	RESOURCE ROOM
CO	CORRIDOR	S	STORAGE
CT	COURTYARD	STM	STEAM / MAKER SPACE
C	GYMNASIUM	T	TOILET
JC	JANITOR'S CLOSET	TL	TEACHER'S LOUNGE
K	KITCHEN	TC	TECH CLOSET
KG	KINDERGARTEN	V	VESTIBULE
KR	KILN ROOM	WR	WORKROOM
LC	LEARNING CONSULTANT		

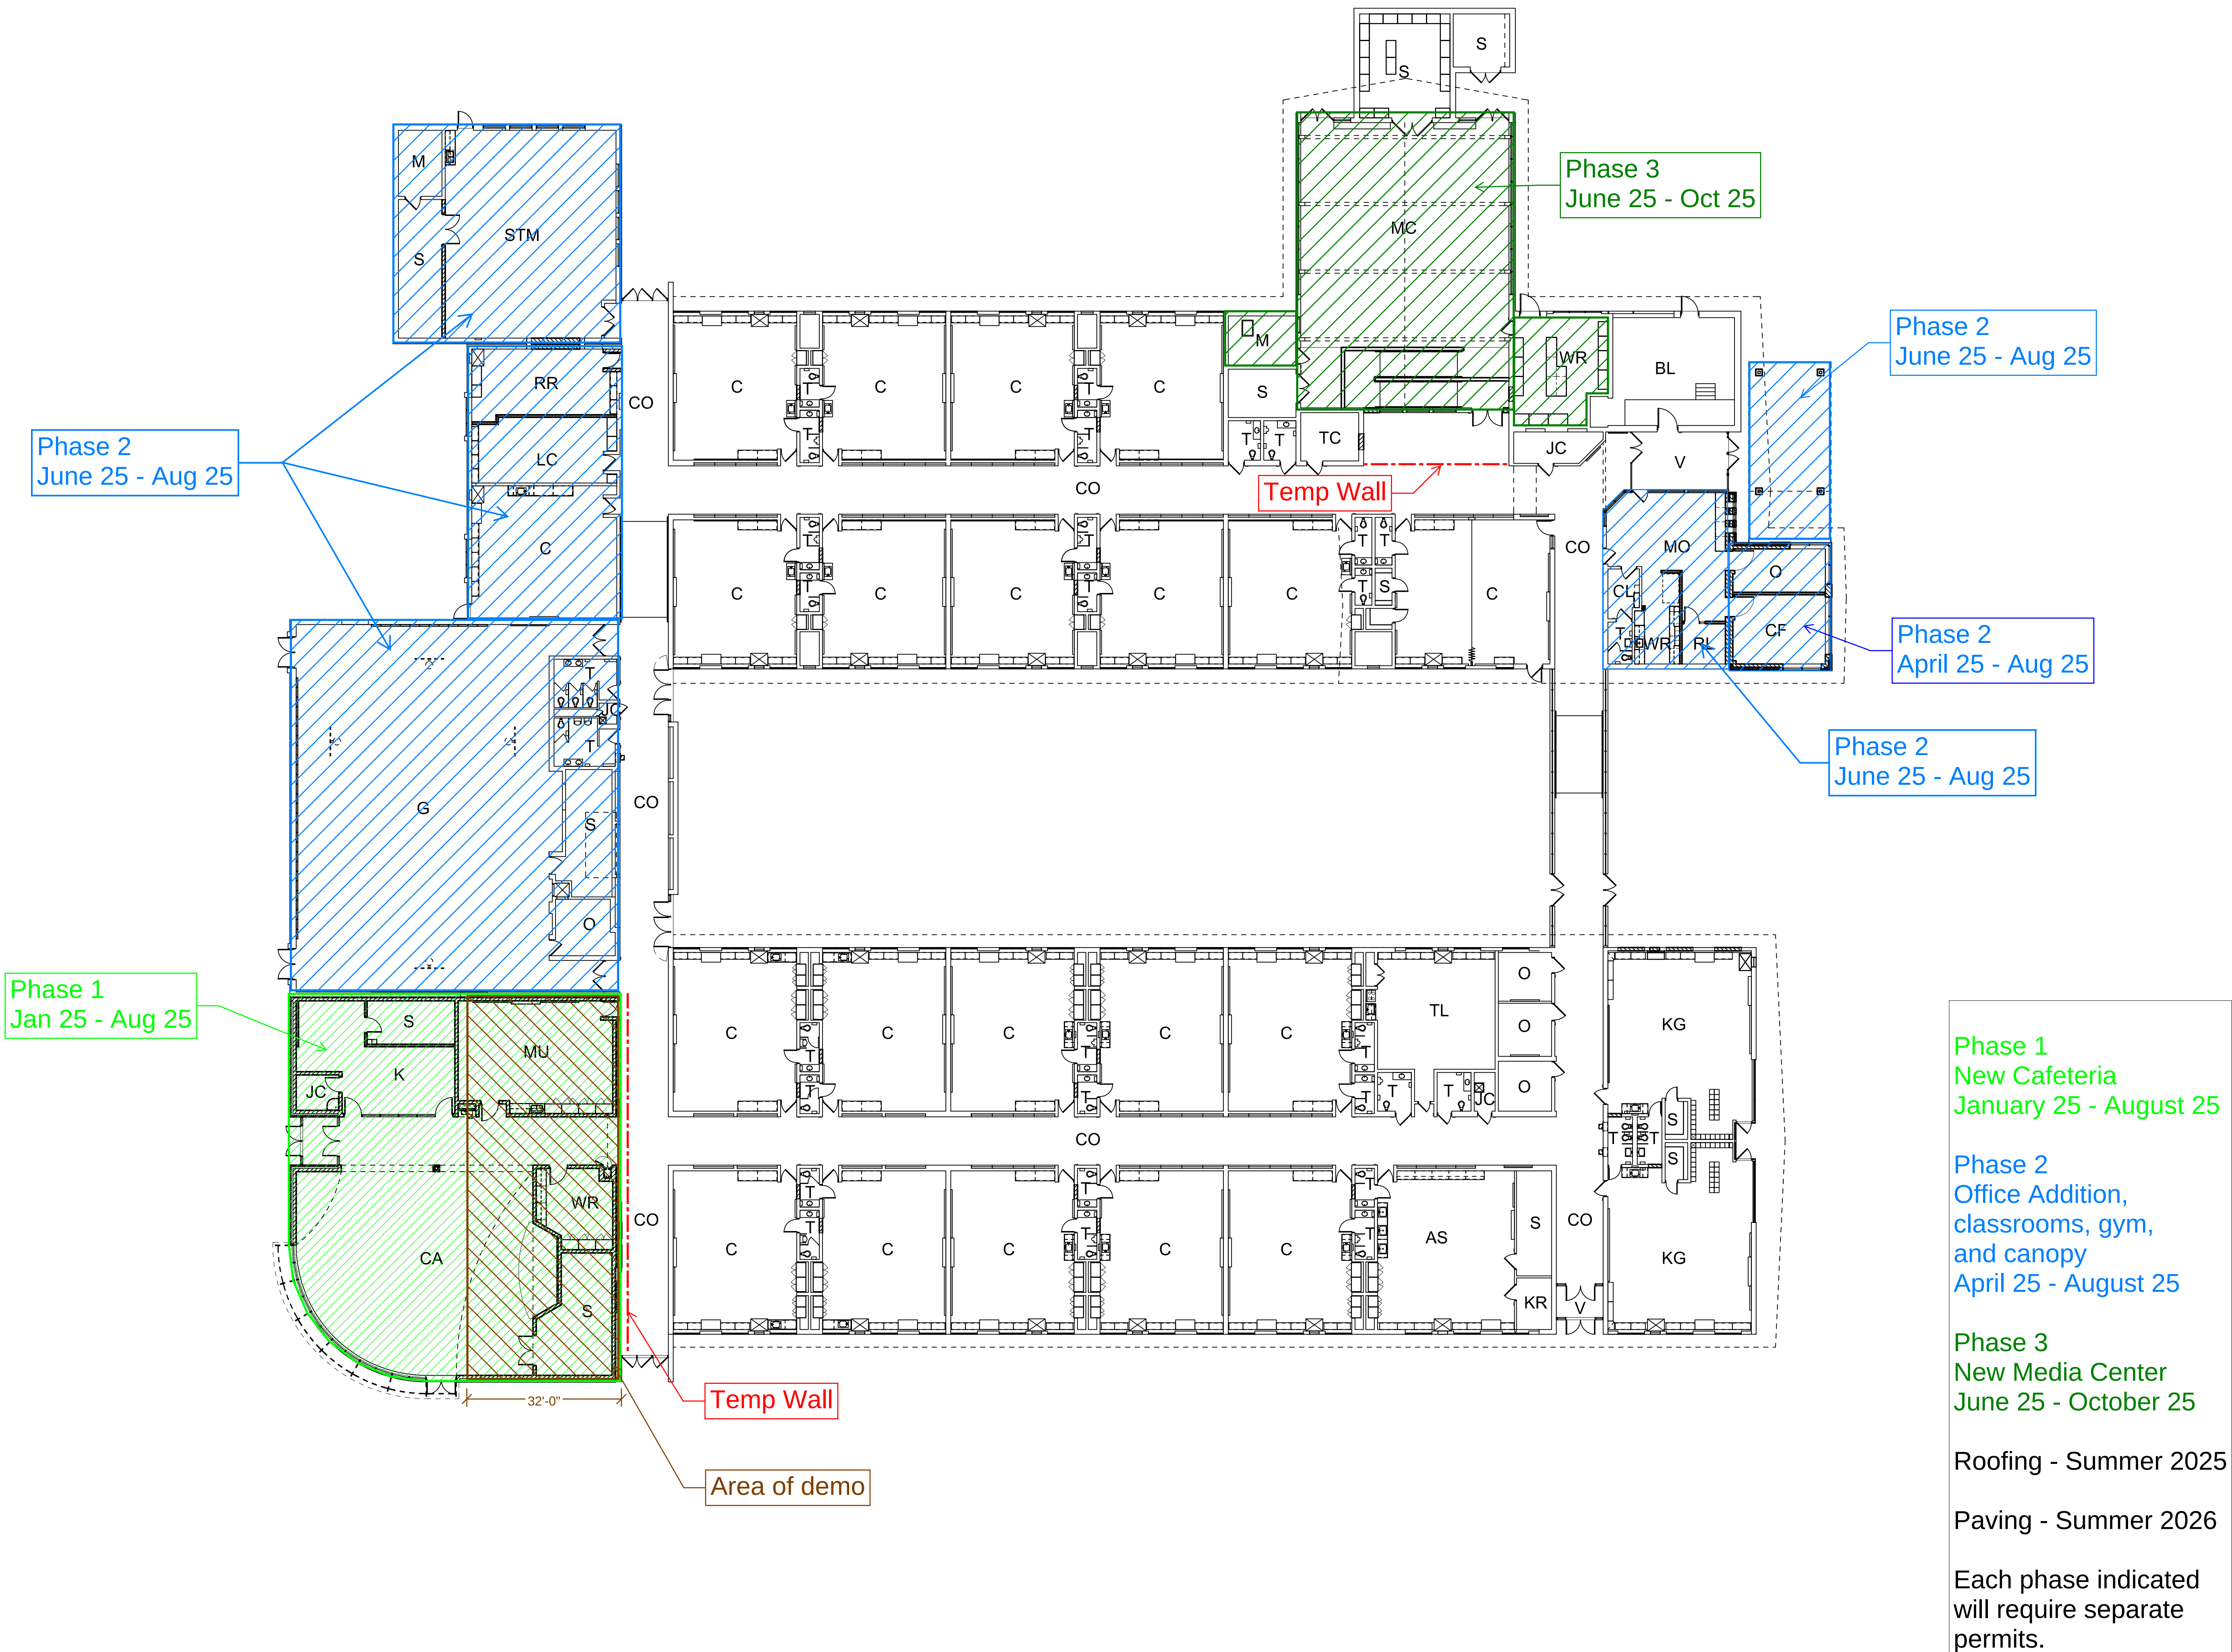

T M P ARCHITECTURE INC
1191 WEST SQUARE LAKE ROAD
BLOOMFIELD HILLS - MICHIGAN - 48302
PH - 248.338.4561 FX - 248.338.0223
EM - INFO@TMP-ARCHITECTURE.COM


REGISTRATION SEAL

CONSULTANT

PROJECT TITLE
**Amerman
Elementary
Additions &
Remodeling**

**Northville Public Schools
Northville, Michigan**

DRAWING TITLE
Composite Floor Plan

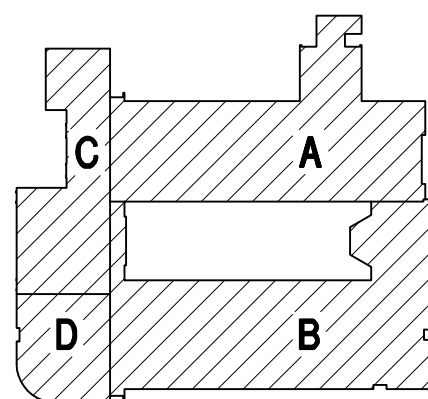

KEY PLAN

ISSUE DATES

03-04-2024	DESIGN DEVELOPMENT
02-04-2024	95% DD REVIEW
02-01-2024	BOND MTNG #7
01-09-2024	BOND MTNG #6
11-30-2023	PLAN UPDATE
09-15-2023	SCHEMATIC DESIGN

DATE:	ISSUED FOR:
DRAWN	ASH
CHECKED	WPW
APPROVED	JJC

PROJECT NO.

23024

DRAWING NO.

AC.1


Meads Mill MS Phasing/Logistics Plan

Large letters correspond to
Zones identified on the drawings

ROOM USE LEGEND					
AC	ART CLASSROOM	G	GYMNASIUM	PR	PRACTICE ROOM
AL	A LA CARTE	JC	JANITOR'S CLOSET	RC	RECEIVING
AP	ASSISTANT PRINCIPAL	K	KITCHEN	RL	RELAXATION ROOM
BL	BOILER ROOM	KR	KILN ROOM	S	STORAGE
BO	BREAKOUT SPACE	L	LOBBY	SC	SCIENCE CLASSROOM
BR	BAND ROOM	LR	LOCKER ROOM	SE	SPECIAL EDUCATION
C	CLASSROOM	LI	LINKS	SH	SHOWER
CA	CAFETERIA	MC	MEDIA CENTER	SP	SCIENCE PREP ROOM
CB	COLLABORATION	MO	MAIN OFFICE	ST	STAGE
CC	COMPUTER CLASSROOM	MR	MAIL ROOM	STM	STEAM ROOM
CF	CONFERENCE ROOM	MS	MEDIA STUDIO	T	TURBO
CH	COLLABORATION HALL	N	NURSE	TC	TECH CLOSET
CL	CLINIC	NO	NURSING	TL	TEACHER'S LOUNGE
CN	CENTRUM	O	OFFICE	TO	TIME OUT AREA
CO	CORRIDOR	OL	OUTDOOR LEARNING	V	VESTIBULE
CS	COLLABORATION STUDIO	P	PRINCIPAL	VM	VOCAL MUSIC
EQ	EQUIPMENT ROOM	PA	PASSAGE	WR	WORKROOM
FM	FLEX MUSIC	PF	PRACTICE FIELD		
FO	FLEX OFFICE				



TMP ARCHITECTURE INC
101 WEST SQUARE LAKE ROAD
BLOOMFIELD HILLS - MICHIGAN - 48302
PH - 248.338.4561 FX - 248.338.0223
EM - INFO@TMP-ARCHITECTURE.COM

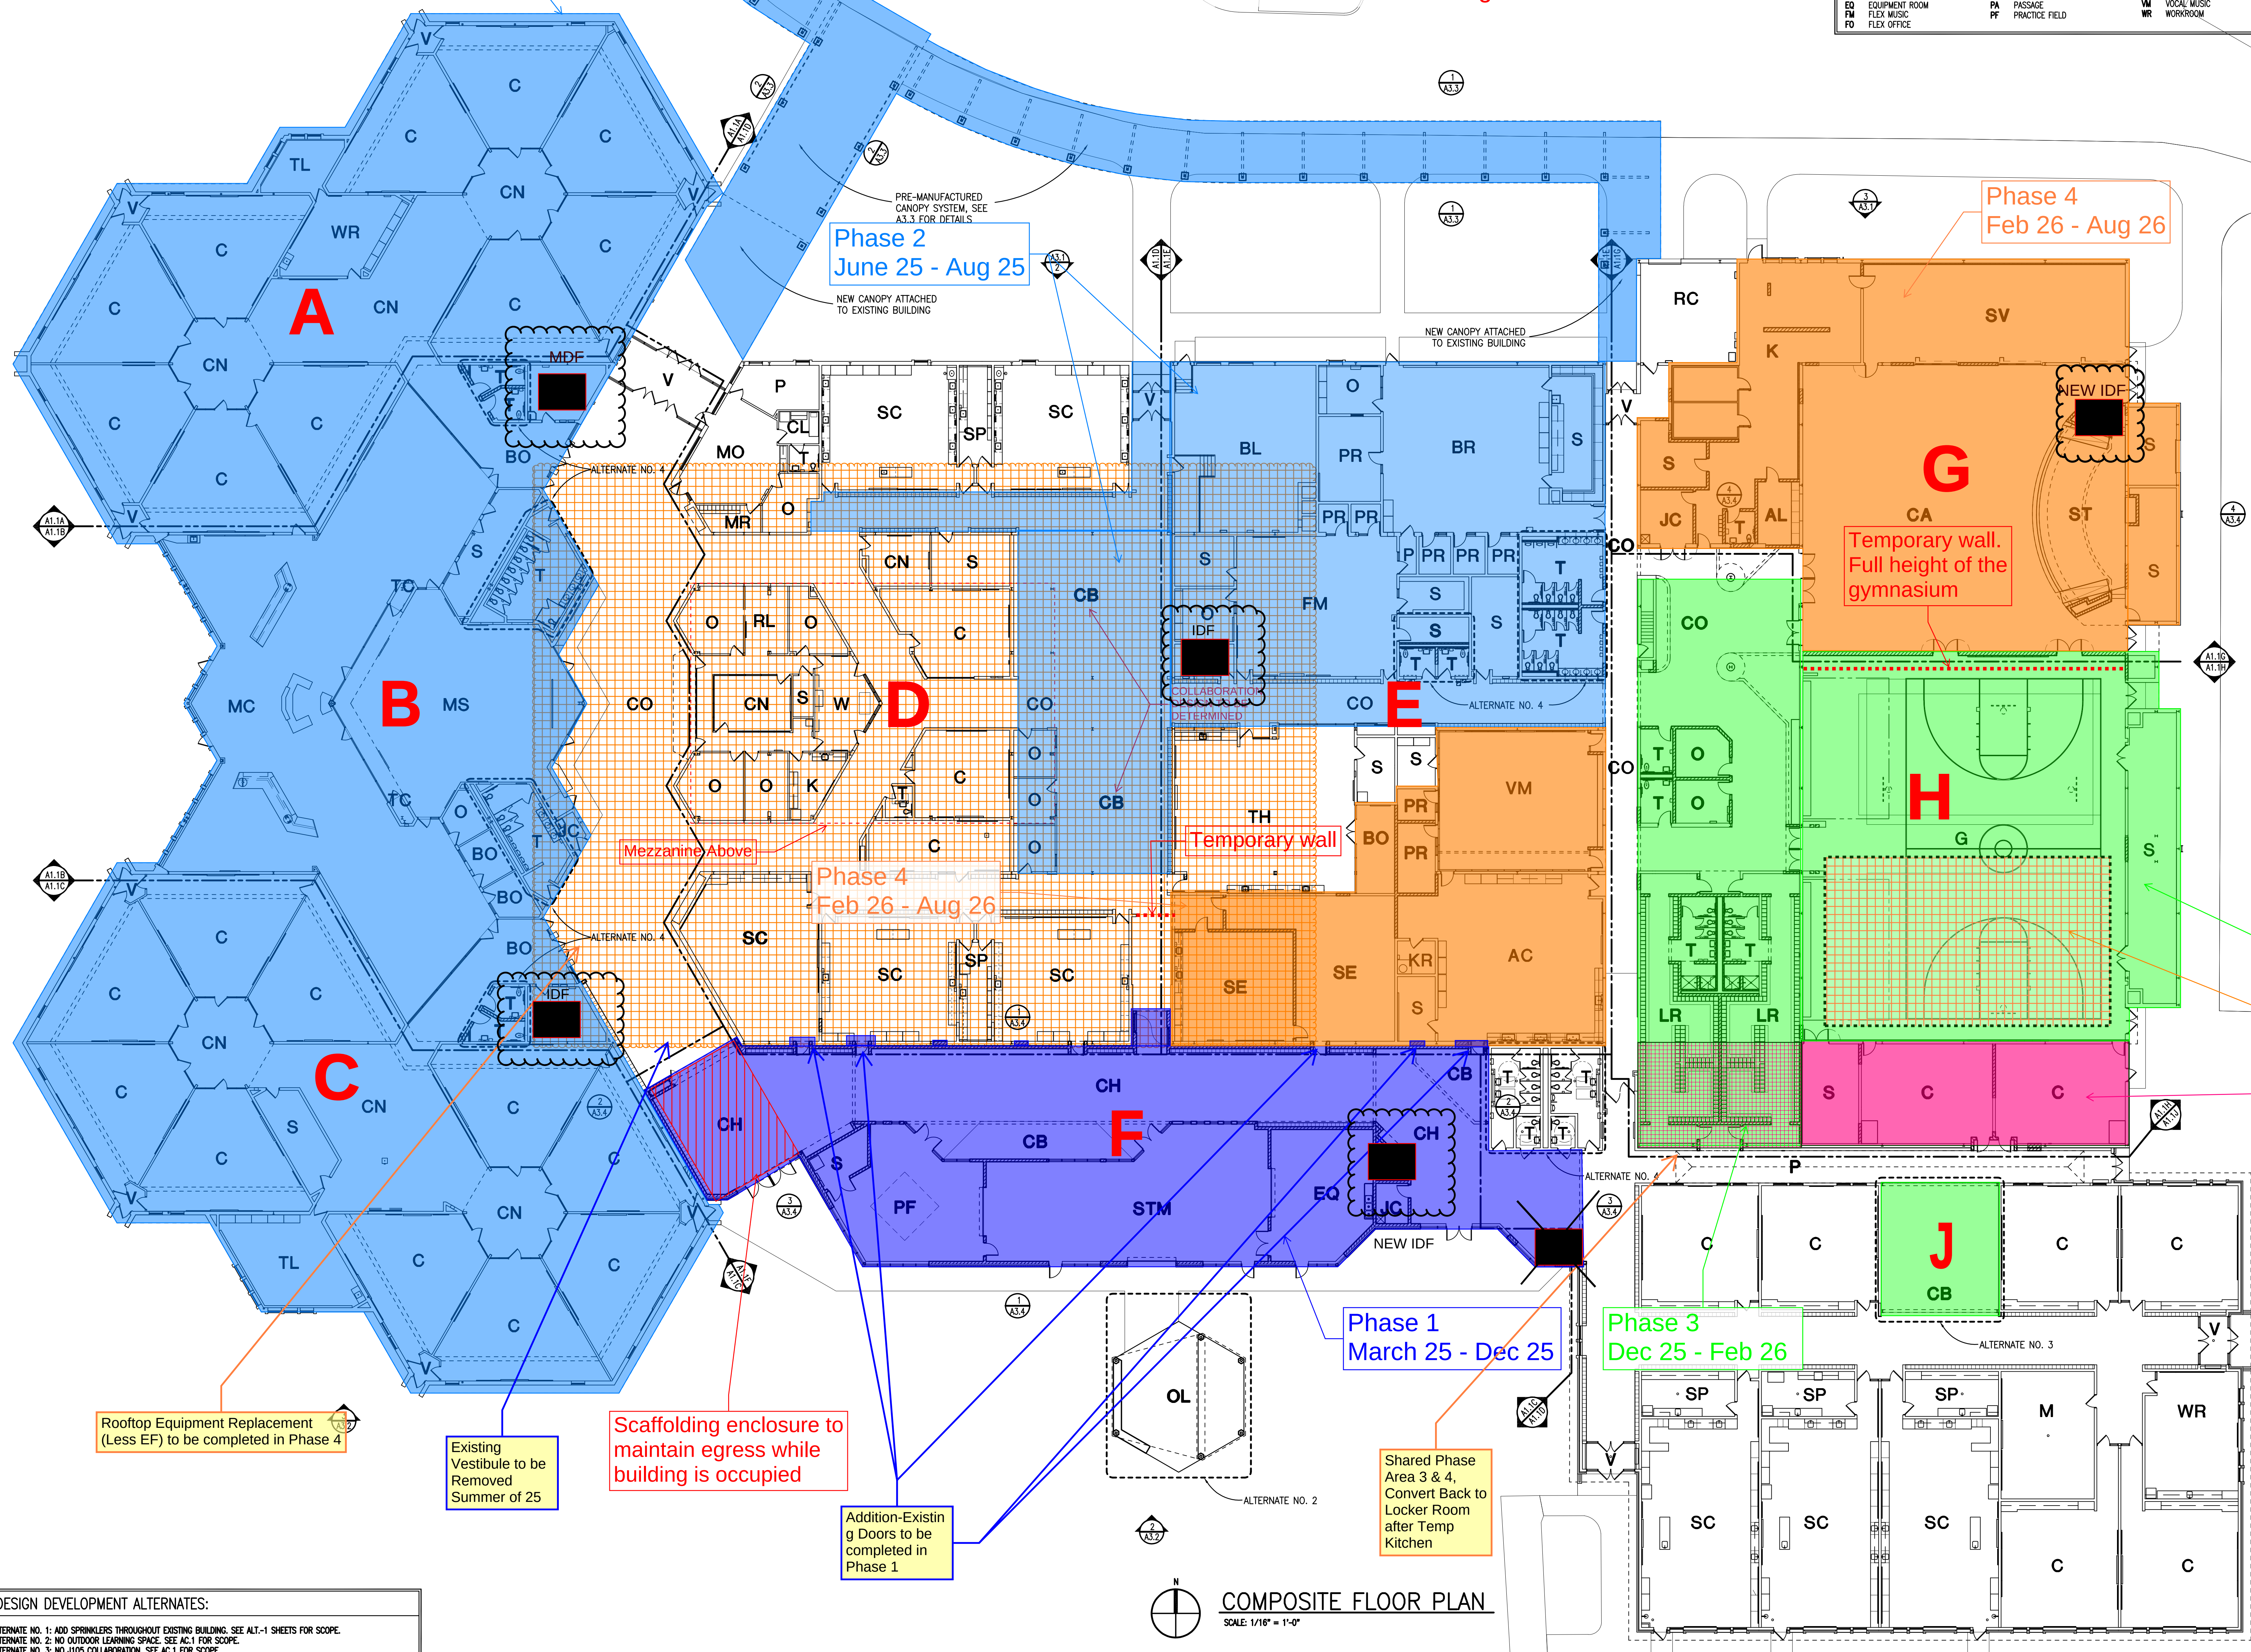

Phase 1
STEAM Space
Spring 25 - Dec 25

Phase 2
Classrooms,
Bathrooms, Canopy
June 25 - August 25

Phase 3
Temp Kitchen
Dec 25 - February 26

Phase 4
Kitchen/Special Ed.
Renovation
Feb 26 - August 26

Phase 5
Gym & Locker Rooms
June 26 - August 26

Exterior Work -
Summer 2025

Each phase indicated
will require separate
permits.

Phase 5
June 26 - Aug 26

Temp. Cafeteria

Phase 3
Dec 25 - Feb 26

ISSUE DATES

DATE	ISSUED FOR:
04-26-2024	DESIGN DEVELOPMENT
04-10-2024	95% DD REVIEW
03-06-2024	BOND MTNG #10
02-07-2024	BOND MTNG #9
01-17-2024	BOND MTNG #8
10-20-2023	SCHEMATIC DESIGN
DATE	ISSUED FOR:
DRAWN	ASH
CHECKED	...
APPROVED	...

PROJECT NO.

23023

DRAWING NO.

AC.1

DESIGN DEVELOPMENT ALTERNATES:

ALTERNATE NO. 1: ADD SPRINKLERS THROUGHOUT EXISTING BUILDING. SEE ALT-1 SHEETS FOR SCOPE.
ALTERNATE NO. 2: NO OUTDOOR LEARNING SPACE. SEE AC.1 FOR SCOPE.
ALTERNATE NO. 3: NO J105 COLLABORATION. SEE AC.1 FOR SCOPE.
ALTERNATE NO. 4: NO RENOVATION/REFINISHING OF EXIST. TOILET RMS. SEE AC.1 FOR SCOPE.

COMPOSITE FLOOR PLAN

SCALE: 1/16" = 1'-0"

SIGN-IN SHEET