Prepared for:

Kyrene Elementary School District
8700 South Kyrene Road
Tempe, Arizona 85284

AHERA ASBESTOS MANAGEMENT PLAN

FOR

KYRENE CENTENNIAL MIDDLE SCHOOL
13808 SOUTH 36TH STREET
PHOENIX, ARIZONA 85044

Prepared by:

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue, Building 7
Phoenix, Arizona 85027
(623) 516-1415

September 12 , 2025

TABLE OF CONTENTS

GENERAL INVENTORY .....SECTION 1

INSPECTION REPORT .....SECTION 2

DESIGNATED PERSON IDENTIFICATION.....SECTION 3

AHERA TRAINING CERTIFICATIONS OF SCHOOL STAFF MEMBERS....SECTION 4

RESPONSE ACTIONS WITH DETAILS, REASONS, & SCHEDULES.....SECTION 5

ACCREDITATION STATEMENT .....SECTION 6

REMAINING ACBM .....SECTION 7

OPERATIONS & MAINTENANCE PLAN .....SECTION 8

EXAMPLE OF INITIAL & ANNUAL NOTIFICATION LETTER .....SECTION 9

COST ESTIMATION.....SECTION 10

MANAGEMENT PLANNER OPTIONAL COMPLIANCE STATEMENT.....SECTION 11

SIGNED STATEMENT BY DESIGNATED PERSON.....SECTION 12

SECTION 1

♦

GENERAL INVENTORY

Dominion Environmental Consultants, Inc.
General Inventory

Client: Kyrene Elementary School District	**Campus: Kyrene Centennial Middle School**
Date: August 20, 2025	**Address: 13808 S. 36th Street, Phoenix, Arizona 85044**

Building	Building Description	BSC or AL	Friable ACBM	Non-Friable ACBM	Assumed ACBM
Admin	Offices, Mail Room, and Restroom	BSC	No	No	Yes
B	Classrooms and Restrooms	BSC	No	No	Yes
C	Classrooms and Restrooms	BSC	No	No	Yes
D	Classrooms and Restrooms	BSC	No	No	Yes
E (MPR)	Gym, Cafeteria, Stage, Restrooms, and Classrooms	BSC	No	No	Yes
F	Classrooms and Restrooms	BSC	No	No	Yes
G	Media Center, Classrooms, and Restrooms	BSC	No	No	Yes
H	Classrooms and Restrooms	BSC	No	No	Yes

Key:
BSC = Bulk Samples Collected
Architectural Letter = AL

DOMINION

SECTION 2

♦

INSPECTION REPORT

DOMINION

KYRENE CENTENNIAL MIDDLE SCHOOL

AHERA Asbestos Inspection Report

Prepared for:

Kyrene Elementary School District
8700 South Kyrene Road
Tempe, Arizona 85284

AHERA ASBESTOS INSPECTION REPORT

FOR

KYRENE CENTENNIAL MIDDLE SCHOOL
13808 S 36TH STREET,
PHOENIX, ARIZONA 85044

PURCHASE ORDER NO. 251702

Prepared by:

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue, Building 7
Phoenix, Arizona 85027
(623) 516-1415

Dominion Project Number: AZ1418.56

AHERA Re-Inspection Date: August 4, 2025 – August 12, 2025

TABLE OF CONTENTS

LIMITATIONS ..... SECTION 1

INSPECTION PROCESS ..... SECTION 2

EXECUTIVE SUMMARY ..... SECTION 3

SITE PLANS ..... SECTION 4

HOMOGENEOUS MATERIALS INVENTORY LISTS ..... SECTION 5

PLM BULK SAMPLE SHEETS ..... SECTION 6

PLM BULK SAMPLE LOCATION MAPS ..... SECTION 7

PHYSICAL ASSESSMENT INFORMATION SHEETS ..... SECTION 8

LABORATORY REPORTS ..... SECTION 9

ASSUMED ACBM LOCATION MAPS ..... SECTION 10

INSPECTOR ACCREDITATION ..... SECTION 11

LABORATORY ACCREDITATION ..... SECTION 12

SECTION 1

♦

LIMITATIONS

LIMITATIONS

The conclusions and results contained herein are based solely on the information presented in this report. The sampling, testing, and observations described in the report represent conditions only at the specified times and locations. Additional materials or information which were hidden, undiscovered, inaccessible, or not a part of the findings presented herein, would result in the modification of the conclusions and recommendations made herein. Any response action guidelines are based solely on the findings contained herein. The response action guidelines are presented as a courtesy and are not to be considered a complete or detailed set of specifications. Dominion performed this survey as directed by the client and in compliance with applicable regulations.

Dominion is not responsible for the accuracy of information provided by others, or for conditions or consequences arising from relevant facts that were withheld, concealed, undiscovered, or not fully disclosed. Dominion is not a law firm, and therefore, makes no representations regarding any potential liability of any person or entity for site conditions. Further, Dominion is not qualified to present medical advice. If any present or future health issues are in question, it is recommended that the findings in this report be presented to a qualified medical professional for evaluation.

Kyrene Centennial is currently being used daily, therefore, to avoid conspicuous damage and a possible trip and fall hazard, Dominion was only able to check for secondary flooring layers in the corners of each room. Therefore, if the carpets are to be replaced, additional investigation should be performed under other areas of the flooring to assure that an undetected second layer of flooring does not exist. Any necessary samples should be collected by a certified inspector prior to the disturbance of any discovered unsampled flooring.

Additional materials or information which were hidden, undiscovered, inaccessible, or are not a part of the finding presented herein, would result in the modification of the conclusions and recommendations made herein. Changes over which Dominion has no control, including but not limited to, the passage of time, manifestation of latent conditions, or occurrence of future events, require reevaluation of the findings, observations, and conclusions expressed in the report.

The limited sampling, testing, and observations described in the report represent conditions only at specified times and locations. These limited sampling methods, techniques, and scope of services were not comprehensive or to be considered all inclusive. Dominion is not responsible for the accuracy of information or services provided by others, including but not limited to other consultants, analytical laboratories, or public records. Dominion is not liable for conditions or consequences arising from relevant facts that were withheld, concealed, undiscovered, or not fully disclosed. Dominion performed this survey in a specific area as directed by the Client and in compliance with applicable regulations.

Dominion's scope of service for this report did not include the inspection for, or identification of fungi, lead paint, or any other hazardous or controlled substances not specifically identified herein. This report presents professional opinions and findings of a scientific or technical nature.

SECTION 2

♦

INSPECTION PROCESS

INSPECTION PROCESS

The Environmental Protection Agency (EPA) in 40 CFR 763, the Asbestos Hazard Emergency Response Act (AHERA), requires Local Education Agencies (LEAs) to identify friable and non-friable asbestos-containing building material (ACBM) in public and private elementary and secondary schools by visually inspecting school buildings for such materials and by sampling all identified suspect materials if they are not assumed to be ACBM. Those samples are then to be analyzed using appropriate analysis techniques, by a qualified laboratory, as referred to in the regulations. AHERA requires LEAs to only utilize accredited personnel when conducting inspections, re-inspections, developing management plans, or performing response actions. This regulation also includes record-keeping requirements. LEAs may contractually delegate their duties under this rule, but they remain responsible for the proper performance of those duties. LEAs are encouraged to consult with EPA Regional Asbestos Coordinators, or if applicable a State's lead agency designated by the State Governor, for assistance in complying with this rule.

This report complies with AHERA based protocols outlined in 40 CFR 763.85, specifically:

- The campus was visually inspected to identify the locations of all suspected ACBM.
- All suspect materials were touched to determine friability and condition.
- Bulk samples were collected of all homogeneous areas of friable suspected ACBM and all homogeneous areas of non-friable suspected ACBM.
- The date of the inspection, the name and signature of the person making the inspection, State of accreditation, his or her accreditation number and any changes in the condition of known or assumed ACBM are included in this report, if applicable.
- The exact locations where samples were collected during the inspection are marked, as well as a description of the manner used to determine sampling locations, the name and signature of each accredited inspector who collected the samples, State of accreditation and if applicable, his or her accreditation number.
- Also included within the report are any assessments or reassessments made of friable material, the name and signature of the accredited inspector making the assessments, State of accreditation and if applicable, his or her accreditation number.

The sampling protocol outlined in 40 CFR 763.86 is as follows:

Surfacing material is material in a school building that is sprayed-on, troweled-on, or otherwise applied to surfaces, such as acoustical plaster on ceilings and fireproofing materials on structural members, or other materials on surfaces for acoustical, fireproofing, or other purposes. Surfacing materials are collected in a statistically random manner as follows:

- At least three (3) bulk samples shall be collected from each homogeneous area that is one thousand (1,000) square feet.

- At least five (5) bulk samples shall be collected from each homogeneous area that is greater than one thousand (1,000) square feet but less than or equal to five thousand (5,000) square feet.

- At least seven (7) bulk samples shall be collected from each homogeneous area that is greater than five thousand (5,000) square feet.

Thermal system insulation (TSI) in a school building means materials applied to pipes, fittings, boilers, breeching, tanks, ducts, or other interior structural components to prevent heat loss or gain, or water condensation, or for other purposes. TSI samples are collected in a randomly distributed manner as follows:

- A minimum of three (3) bulk samples are collected from each homogeneous area of TSI that is not assumed to be ACBM.

- Collect at least one (1) bulk sample from each homogeneous area of patched TSI that is not assumed to be ACBM if the patched section is less than six (6) linear or square feet.

- In a manner sufficient to determine whether the material is ACBM or not ACBM, collect bulk samples from each insulated mechanical system that is not assumed to be ACBM where cement or plaster is used on fittings such as tees, elbows, or valves.

- Bulk samples are not required to be collected from any homogeneous area where the accredited inspector has determined that the TSI is fiberglass, foam glass, rubber, or other non-ACBM.

  Miscellaneous material is sampled in a manner sufficient to determine whether the material is ACBM or not ACBM. An accredited inspector shall collect bulk samples from each homogeneous area of friable miscellaneous material that is not "assumed" to be ACBM. Therefore, Dominion will collect a minimum of three (3) samples of each miscellaneous material, as a matter of industry standards.

ASSESSMENT OF MATERIALS

In compliance with 40 CFR 763.88, Dominion inspectors have classified the ACBM and suspected ACBM in the school buildings into one of the following categories:

(1) Damaged or significantly damaged Thermal System Insulation ACBM
(2) Damaged friable surfacing ACBM
(3) Significantly damaged friable surfacing ACBM
(4) Damaged or significantly damaged friable miscellaneous ACBM
(5) ACBM with potential for damage
(6) ACBM with potential for significant damage
(7) Any remaining friable ACBM or friable suspected ACBM

As part of the assessment, the following issues have been taken into consideration:

i. Location and the amount of the material, both in total quantity and as a percentage of the functional space.
ii. The type of damage or significant damage (e.g., flaking, blistering, water damage, or other signs of physical damage).
iii. The severity of damage (e.g., major flaking, severely torn jackets, as opposed to occasional flaking, minor tears to jackets).
iv. Extent or spread of damage over large areas or large percentages of the homogeneous area.
v. Whether the material is accessible.
vi. The material's potential for disturbance.
vii. Known or suspected causes of damage or significant damage (e.g., air erosion, vandalism, vibration, water).
viii. Preventive measures might eliminate the reasonable likelihood of undamaged ACBM from becoming significantly damaged.

SECTION 3

♦

EXECUTIVE SUMMARY

EXECUTIVE SUMMARY

INTRODUCTION

Dominion Environmental Consultants, Inc. (Dominion) was authorized, by Mr. Mason Meade with the Kyrene Elementary School District (KESD), to perform the Initial AHERA Asbestos Inspection of Kyrene Centennial Middle School, located at 13808 S. 36th Street, Phoenix, Arizona, via a written Purchase Order #251702, dated August 4, 2025.

Due to budgetary constraints, Dominion was directed by Mr. Meade to first sample the accessible building materials inside the building until a pre-determined number of samples were collected. Once the allotted number of samples per building had been collected, Dominion was then directed to "assume as asbestos-containing" the remaining suspect building materials. Pursuant to Mr. Meade's directions, the sampling order of importance was determined first on materials with the largest square footage, then least accessible materials, ceramic tiles, and materials least likely to be disturbed.

Dominion was also instructed to utilize Dominions pervious Limited Asbestos Reports, Project Numbers AZ0959.2917 dated September 29, 2021, AZ0959.3105 dated July 11, 2022, and AZ1418.11 dated March 12, 2024. Per the direction of Mr. Meade, Dominion was instructed to utilize the information from these previous reports and to only collect additional bulk samples of any previously unsampled building materials.

Kyrene Centennial Middle School campus consists of eight (8) single story, slab on grade, block structure. No below grade levels were observed for any building on campus.

BACKGROUND INFORMATION

INITIAL LIMITED AHERA ASBESTOS SURVEY – SEPTEMBER 2021

Dominions Limited Asbestos Inspections of the Kyrene Centennial Middle School Kitchen, Building E was conducted on January 15, 2021, by Mr. Garth Backman, an AHERA accredited Asbestos Building Inspector (State of Arizona ON-4644-12304-071621, expiration date June 16, 2022).

2022 LIMITED AHERA ASBESTOS SURVEY – JULY 2022

Dominions Limited Asbestos Inspections of the Kyrene Centennial Middle School Men's Restroom of the Teachers' Lounge in Building D was conducted on July 11, 2022, by Mr. Nick Marcos, an AHERA accredited Asbestos Building Inspector (State of Arizona #ON-4644-8873-032422, expiration date March 24, 2023).

2024 6-MONTH SURVEILLANCE INSPECTION – MARCH 2024

Dominions 6-Month Surveillance Inspection of the Kyrene Centennial Middle School was conducted on March 12, 2024, by Mrs. Tracey Carpenter, an AHERA accredited Asbestos Building Inspector (State of Arizona # ON-4644-14588-090523, expiration date September 5, 2024).

2025 AHERA ASBESTOS RE-INSPECTION – AUGUST 2025

Dominion's AHERA Asbestos Inspection, of the Kyrene Centennial Middle School was conducted on August 4 – 12, 2025, by Mr. Nick Marcos, an AHERA accredited Asbestos Building Inspector. (State of Arizona #ON-188748-8873-031325, expiration date March 13, 2026).

COLLECTION OF BULK SAMPLES

Initial Limited AHERA Asbestos Survey – September 2021

A total of three (3) bulk samples were collected from one (1) homogeneous building material within the kitchen of Building 500.

Identified in the following list is the one (1) suspect homogeneous building materials sampled during the September 29, 2021, limited asbestos inspection.

Building E – Kitchen - 1 Materials – 0 ACBM

- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

2022 Limited AHERA Asbestos Survey – July 2022

A total of fifteen (15) bulk samples were collected from seven (7) homogeneous building materials within the faculty restroom of Building D.

Identified in the following list are the seven (7) suspect homogeneous building materials sampled during July 11, 2022, limited asbestos inspection.

Building E – Kitchen - 7 Materials – 0 ACBM

- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)
- Brown Cove Base
- Yellow Mastic for Brown Cove Base
- Blue Cove Base
- Yellow Mastic for Blue Cove Base
- Counter Caulking
- Fixture Caulking

2024 AHERA Asbestos Inspection – March 2024

A total of forty-one (41) bulk samples were collected from thirty-nine (39) homogeneous building materials within the Restrooms in Building 200 and Kitchen and Stage of Building 600.

Identified in the following list are the thirty-nine (39) suspect homogeneous building materials sampled during the March 13, 2024, limited asbestos inspection.

Building A – 3 Materials – 0 ACBM

- Skip Trowel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)
- White w/Gray Specks 12"x12" VCT
- Semi-Transparent Mastic for 12” x 12” VCT

Building B– 7 Materials – 0 ACBM

- Tan Ceramic Tile
- Cream Mastic for Tile
- Gray Grout for Tile
- Gray Mortar for Tile
- White Ceramic Tile ND
- Gray Grout ND
- Tan Mastic

Building C – 3 Materials – 0 ACBM

- White Ceramic Tile
- Gray Grout for Tile
- Tan Mastic for Tile

Building D – 12 Materials – 0 ACBM

- White Ceramic Tile
- Gray Grout for Tile
- Tan Mastic for Tile
- 2” x 2” Tan Floor Tiles
- Gray Grout for Tile
- Yellow Mastic for Tile
- 2” x 2” Pink Floor Tile
- Gray Grout for Tile
- Beige Thinset for Tile
- 2” x 2” Green Floor Tile
- Gray Grout for Tile
- Beige Thinset for Tile

Building E – 9 Materials – 0 ACBM

- Red 12” x 12” VCT
- Mastic for Red 12” x 12” VCT
- Brown Stair Tread
- Cream Mastic for Brown Stair Tread
- White RR Wall Tiles
- Grout for White RR Wall Tiles
- White 2” x 2” Floor Tiles
- Dark Gray Grout for Tile
- Dark Gray Thinset for Tile

Building H – 4 Materials – 0 ACBM

- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)
- Tac Board
- White 12” x 12” VCT
- Transparent Mastic for White 12” x 12” VCT

2025 AHERA Asbestos Re-Inspection - June 2025

During the 2025 AHERA Asbestos Re-inspection, a total of one hundred and twenty-three (123) bulk samples were collected from fifty-five (55) homogeneous building materials (multiple layers) throughout the Kyrene Centennial Buildings A, B, C, D, E, F, and G. Identified in the following list are the fifty-five (55) suspect homogeneous materials Dominion sampled during the 2025 AHERA inspection.

Building A – 7 Materials – 0 ACBM

- New 2” x 2” Ceiling Tile
- Old 2” x 2” Ceiling Tile
- Gray Multi-Color Carpet Square
- Tan Mastic for Gray Multi-Color Carpet Square
- Blue Cove Base
- Cream Mastic Blue Cove Base
- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

Building B – 7 Materials – 0 ACBM

- New 2” x 2” Ceiling Tile
- Old 2” x 2” Ceiling Tile
- Gray Multi-Color Carpet Square
- Yellow Mastic for Carpet Square

- Blue Cove Base
- Yellow Mastic for Cove Base
- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

Building C – 7 Materials – 0 ACBM

- New 2” x 2” Ceiling Tile
- Old 2” x 2” Ceiling Tile
- Gray Multi-Color Carpet Square
- Tan Mastic for Gray Multi-Color Carpet Square
- Blue Cove Base
- Cream Mastic for Blue Cove Base
- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

Building D – 7 Materials – 0 ACBM

- New 2’ x 2’ Ceiling Tile
- Old 2’ x 2’ Ceiling Tile
- Gray Multicolored Carpet Square
- Multicolored Mastic for Carpet Square
- Blue Cove Base
- Cream Mastic for Cove Base
- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

Building E – 8 Materials – 0 ACBM

- New 2” x 2” Ceiling Tile
- Old 2” x 2” Ceiling Tile
- Peach Soundboard Wrap
- Yellow Adhesive for Wrap
- Gray Multicolored Carpet Square
- Multicolored Mastic for Carpet Square
- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)
- 2"x4" Ceiling Tile

Building F – 8 Materials – 0 ACBM

- New 2’ x 2’ Ceiling Tile
- Old 2’ x 2’ Ceiling Tile
- Lightly Textured 2’ x 2’ Ceiling Tile
- Gray Multicolor Carpet Square
- Mastic for Gray Multicolor Carpet Square
- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

Building G – 6 Materials – 0 ACBM

- Lightly Textured 2’ x 2’ Ceiling Tile
- New 2’ x 2’ Ceiling Tile
- Old 2’ x 2’ Ceiling Tile
- Gray Multi-Color Carpet Square
- Mastic for Gray Multi-Color Carpet Square
- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

Building H – 7 Materials – 0 ACBM

- New 2’ x 2’ Ceiling Tile
- Old 2’ x 2’ Ceiling Tile
- Gray Muli-Color Carpet Square
- Mastic for Gray Muli-Color Carpet Square
- Blue Cove Base
- Cream Mastic for Blue Cove Base
- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

All the suspect bulk samples collected from Kyrene Centennial Middle School were submitted to EMLab P&K (EMLab) in Phoenix, Arizona for analysis using Polarized Light Microscopy (PLM) methods. EMLab used the methods prescribed in Method 40 CFR, Part 763, in the Code of Federal Register in analyzing bulk samples. EMLab is certified by the National *Institute of Standards* and Technology as a National Voluntary Laboratory Accreditation Program (NVLAP), Number 500031-0. The suspect asbestos bulk samples were collected and submitted to the laboratory using established chain-of-custody procedures.

Bulk samples were collected utilizing safety and health practices as required by the Occupational Safety and Health Administration (OSHA). At the time of sample collection, the buildings were not occupied by students. Only limited administrative and custodial staff were present on campus.

ASSUMED ACBM – June 20 & June 23, 2025 – June 24, 2025

Due to budgetary constraints, KESD instructed Dominion to assume any unsampled suspect building materials as asbestos containing until further asbestos bulk sampling can be budgeted and conducted. Therefore, listed below, separated by building, are the three hundred and seventy-nine (379) building materials that were assumed to contain greater than one percent (>1%) asbestos.

Building A – 33 Assumed ACBM

- Black Carpet Square
- Mastic for Black Carpet Square
- Interior Caulking

- Exterior Caulking
- Tackboard
- Mastic for Tackboard
- Window Glazing
- Brick
- Mortar for Brick
- Glass Block Mortar
- Block
- Mortar for Block
- Black Sink Coating
- Gray Wallpaper
- Fixture Caulking
- FRP
- Mastic for FRP
- Brown Cove Base
- Mastic for Brown Cove Base
- Knockdown Drywall System
- Tan Striped Wallpaper
- Large Pipe Wrap
- Mastic for Large Pipe Wrap
- Small Pipe Wrap
- Mastic for Small Pipe Wrap
- Black Pipe Insulation Foam
- Silver Box Duct Wrap
- Silver Duct Wrap
- Silver Flex Duct Wrap
- White Duct Seam Tape
- Mastic for Duct Seam Tape
- Unfinished Drywall System
- Silver Duct Tape

Building B – 43 Assumed ACBM

- Black Entry Carpet
- Mastic for Entry Carpet
- Interior Caulking
- Exterior Caulking
- Black Sink Coating
- FRP
- Mastic for FRP
- Tackboard
- Mastic for Tackboard
- White 2” x 2” Ceramic Floor Tile

- Grout for White 2” x 2” Ceramic Floor Tile
- Thinset for White 2” x 2” Ceramic Floor Tile
- Peach 2” x 2” Ceramic Floor Tile
- Grout for Peach 2” x 2” Ceramic Floor Tile
- Thinset for Peach 2” x 2” Ceramic Floor Tile
- Blue 2” x 2” Ceramic Floor Tile
- Grout for Blue 2” x 2” Ceramic Floor Tile
- Thinset for Blue 2” x 2” Ceramic Floor Tile
- Off-White 4” x 4” Ceramic Wall Tile
- Grout for Off-White 4” x 4” Ceramic Wall Tile
- Mastic for Off-White 4” x 4” Ceramic Wall Tile
- Peach 4” x 4” Ceramic Wall Tile
- Grout for Peach 4” x 4” Ceramic Wall Tile
- Mastic for Peach 4” x 4” Ceramic Wall Tile
- Fixture Caulking
- Brown Cove Base
- Mastic for Cove Base
- White w. Black 12” x 12”VCT
- Mastic for White w. Black 12” x 12”VCT
- Knockdown Drywall System
- Brick
- Mortar for Brick
- Expansion Joint
- Silver Box Duct Wrap
- Silver Duct Wrap
- Silver Flex Duct Wrap
- White Duct Tape
- Mastic for Duct Tape
- Large Pipe Wrap
- Mastic for Pipe Wrap
- Small Pipe Wrap
- Mastic for Pipe Wrap
- Unfinished Drywall System

Building C – 45 Assumed ACBM

- Black Entry Carpet
- Mastic for Entry Carpet
- Interior Caulking
- Black Sink Coating
- Exterior Caulking
- Tackboard
- Mastic for Tackboard

- Knockdown Drywall System
- Brown Cove Base
- Mastic for Cove Base
- White w. Black 12" x 12" VCT
- Mastic for White w. Black 12" x 12" VCT
- Divider Wall
- White 2" x 2" Ceramic Floor Tile
- Grout for White 2" x 2" Ceramic Floor Tile
- Thinset White 2" x 2" Ceramic Floor Tile
- Peach 2" x 2" Ceramic Floor Tile
- Grout for Peach 2" x 2" Ceramic Floor Tile
- Thinset Peach2" x 2" Ceramic Floor Tile
- Blue 2" x 2" Ceramic Floor Tile
- Grout for Blue 2" x 2" Ceramic Floor Tile
- Thinset Blue 2" x 2" Ceramic Floor Tile
- Off-white 4" x 4" Ceramic Wall Tile
- Grout for Off-white 4" x 4" Ceramic Wall Tile
- Mastic Blue Off-white 4" x 4" Ceramic Wall Tile
- Peach 4" x 4" Ceramic Wall Tile
- Grout for Peach 4" x 4" Ceramic Wall Tile
- Mastic Blue Peach 4" x 4" Ceramic Wall Tile
- Fixture Caulking
- FRP
- Mastic for FRP
- Black Countertops
- Brick
- Mortar for Brick
- Expansion Joint
- Silver Box Duct Wrap
- Silver Duct Wrap
- Silver Flex Duct Wrap
- White Duct Tape
- Mastic for Duct Tape
- Large Pipe Wrap
- Mastic for Large Pipe Wrap
- Small Pipe Wrap
- Mastic for Small Pipe Wrap
- Unfinished Drywall System

Building D – 45 Assumed ACBM

- Black Entry Carpet
- Mastic for Entry Carpet

- Interior Caulking
- Exterior Caulking
- Black Sink Coating
- Tackboard
- Mastic for Tackboard
- Knockdown Drywall
- White w. Black 12" x 12" VCT
- Mastic for White w. Black 12" x 12" VCT
- Black Countertops
- FRP
- Mastic for FRP
- Brown Cove Base
- Mastic for Cove Base
- Divider Wall
- White 2" x 2" Ceramic Floor Tile
- Grout for White 2" x 2" Ceramic Floor Tile
- Thinset for White 2" x 2" Ceramic Floor Tile
- Peach 2" x 2" Ceramic Floor Tile
- Grout for Peach 2" x 2" Ceramic Floor Tile
- Thinset for Peach 2" x 2" Ceramic Floor Tile
- Blue 2" x 2" Ceramic Floor Tile
- Grout for Blue 2" x 2" Ceramic Floor Tile
- Thinset for Blue 2" x 2" Ceramic Floor Tile
- Off-White 4" x 4" Ceramic Wall Tile
- Grout for Off-White 4" x 4" Ceramic Wall Tile
- Mastic for Off-White 4" x 4" Ceramic Wall Tile
- Peach 4" x 4" Ceramic Wall Tile
- Grout for Peach 4" x 4" Ceramic Wall Tile
- Mastic for Peach 4" x 4" Ceramic Wall Tile
- Fixture Caulking
- Brick
- Mortar for Brick
- Expansion Joint
- Silver Box Duct Wrap
- Silver Duct Wrap
- Silver Flex Duct Wrap
- White Duct Tape
- Mastic for Duct Tape
- Large Pipe Wrap
- Mastic for Large Pipe Wrap
- Small Pipe Wrap
- Mastic for Small Pipe Wrap
- Unfinished Drywall System

Building E – 86 Assumed ACBM

- Black Entry Carpet
- Mastic
- Blue Cove Base
- Mastic for Cove Base
- Interior Caulking
- Exterior Caulking
- Black Window Glazing
- Black Sink Coating
- Divider Wall
- Blue 6" Cove Base
- Mastic for Blue 6" Cove Base
- Black 6" Cove Base
- Mastic for Black 6" Cove Base
- Gray Speckled 12" x 12" VCT
- Mastic for Gray VCT
- Brick
- Mortar for Brick
- Expansion Joint
- Black L Shaped Cove Base
- Mastic for L Shaped Cove Base
- Old FRP
- Mastic for Old FRP
- Tackboard
- Mastic for Tackboard
- Brown 6" Cove Base
- Mastic for 6" Cove Base
- Brown 4" Cove Base
- Mastic for Brown 4" Cove Base
- White w/ Gray Specks 12" X 12" VCT
- Mastic
- New FRP
- Mastic for New FRP
- Brown 6" x 6" Ceramic Floor Tile
- Grout for Brown 6" x 6" Ceramic Floor Tile
- Thinset for Brown 6" x 6" Ceramic Floor Tile
- Brown 4" x 6" Ceramic Cove Base
- Mastic for Brown 4" x 6" Ceramic Cove Base
- Drywall 2' x 4' Ceiling Tile
- Polished Concrete
- Floor Expansion Joint for Polished Concrete

- White w. Black 12" x 12" VCT
- Mastic for 12" x 12" VCT
- Black 4" Cove Base
- Mastic for Black 4" Cove Base
- White 4" x 4" Ceramic Wall Tile
- Grout for White 4" x 4" Ceramic Wall Tile
- Mastic for White 4" x 4" Ceramic Wall Tile
- Red 4" x 4" Ceramic Wall Tile
- Grout for Red 4" x 4" Ceramic Wall Tile
- Mastic for Red 4" x 4" Ceramic Wall Tile
- Black 4" x 4" Ceramic Wall Tile
- Grout for Black 4" x 4" Ceramic Wall Tile
- Mastic for Black 4" x 4" Ceramic Wall Tile
- Gray Floor Coating
- Fixture Caulking
- Glass Block Mortar
- Red 3" x 12" Ceramic Wall Tile
- Gray FRP
- Mastic for FRP
- Concrete Benches
- Gray 6" x 6" Ceramic Floor Tile
- Grout for Gray 6" x 6" Ceramic Floor Tile
- Thinset for Gray 6" x 6" Ceramic Floor Tile
- Green Speckled 2" x 2" Ceramic Floor Tile
- Grout for Ceramic Floor Tile
- Thinset for Ceramic Floor Tile
- Gray 2" x 2" Ceramic Floor Tile
- Grout for Ceramic Floor Tile
- Thinset for Ceramic Floor Tile
- Peach 4" x 4" Ceramic Wall Tile
- Grout for Peach 4" x 4" Ceramic Wall Tile
- Thinset for Peach 4" x 4" Ceramic Wall Tile
- Gray 4" x 4" Ceramic Wall Tile
- Grout for Gray 4" x 4" Ceramic Wall Tile
- Thinset for Gray 4" x 4" Ceramic Wall Tile
- Silver Box Duct Wrap
- Silver Duct Wrap
- Silver Flex Duct Wrap
- White Duct Tape
- Mastic for Duct Tape
- Gray Duct Mastic
- Large Pipe Wrap
- Mastic for Large Pipe Wrap

- Small Pipe Wrap
- Mastic for Pipe Wrap
- Unfinished Drywall

Building F – 38 Assumed ACBM

- Blue Cove Base
- Mastic for Blue Cove Base
- Interior Caulking
- Exterior Caulking
- Black Window Glazing
- Tackboard
- Mastic for Tackboard
- White w. Black 12" x 12" VCT
- Mastic for VCT
- Fixture Caulking
- Gray Sink Coating
- Brown Cove Base
- Mastic for Brown Cove Base
- Polished Concrete
- Floor Expansion Joint for Polished Concrete
- Gray Duct Mastic
- Black Rubber Gym Floor
- Black Cove Base
- Mastic for Black Cove Base
- Gray Wood Vinyl Flooring
- Mastic for Gray Wood Vinyl Flooring
- Divider Wall
- Brick
- Mortar for Brick
- Expansion Joint
- Large Pipe Wrap
- Mastic for Large Pipe Wrap
- Small Pipe Wrap
- Mastic for Pipe Wrap
- Black Pipe Foam Insulation
- Silver Box Duct Wrap
- Silver Duct Wrap
- Silver Flex Duct Wrap
- White Duct Tape
- Mastic for Duct Tape
- Unfinished Drywall
- Silver Duct Tape

- Skylight Insulation Panel

Building G – 32 Assumed ACBM

- Black Entry Carpet
- Mastic for Entry Carpet
- Blue Cove Base
- Mastic for Cove Base
- Interior Caulking
- Exterior Caulking
- Black Sink Coating
- Tackboard
- Mastic for Tackboard
- White w. Black 12" x 12" VCT
- Mastic for VCT
- Green Wallpaper
- Glass Block Mortar
- White w. Gray 12" x 12" VCT
- Mastic for VCT
- Gray Wallpaper
- Knockdown Drywall
- Brown Cove Base
- Mastic for Brown Cove Base
- Large Pipe Wrap
- Mastic for Large Pipe Wrap
- Small Pipe Wrap
- Mastic for Pipe Wrap
- Black Pipe Foam Insulation
- Silver Box Duct Wrap
- Silver Duct Wrap
- Silver Flex Duct Wrap
- White Duct Tape
- Mastic for Duct Tape
- Unfinished Drywall
- Silver Duct Tape
- Skylight Insulation Panel

Building H – 57 Assumed ACBM

- Black Entry Carpet
- Mastic for Black Entry Carpet
- Interior Caulking
- Exterior Caulking

- Black Sink Coating
- Tackboard
- Mastic for Tackboard
- White Sink Coating
- Fume Hood Panel
- Tan Speckled 12" x 12" VCT
- Mastic for Tan Speckled 12" x 12" VCT
- Gray Cove Base
- Mastic for Gray Cove Base
- FRP
- Mastic for FRP
- Smooth Drywall
- White w. Gray Specks 12" x 12" VCT
- Mastic for White w. Gray Specks 12" x 12" VCT
- Divider Wall
- Block
- Mortar for Block
- Brick
- Mortar for Brick
- Off-White 4" x 4" Ceramic Wall Tile
- Mastic for Off-White 4" x 4" Ceramic Wall Tile
- Grout for Off-White 4" x 4" Ceramic Wall Tile
- Peach 4" x 4" Ceramic Wall Tile
- Mastic for Peach 4" x 4" Ceramic Wall Tile
- Grout for Peach 4" x 4" Ceramic Wall Tile
- Gray 4" x 4" Ceramic Wall Tile
- Mastic for Gray 4" x 4" Ceramic Wall Tile
- Grout for Gray 4" x 4" Ceramic Wall Tile
- Off-White 2" x 2" Ceramic Floor Tile
- Grout for Off-White 2" x 2" Ceramic Floor Tile
- Thinset for Off-White 2" x 2" Ceramic Floor Tile
- Green Speckled 2" x 2" Ceramic Floor Tile
- Grout for 2" x 2" Ceramic Floor Tile
- Thinset for 2" x 2" Ceramic Floor Tile
- Gray Speckled 2" x 2" Ceramic Floor Tile
- Grout for 2" x 2" Ceramic Floor Tile
- Thinset for 2" x 2" Ceramic Floor Tile
- Fixture Caulking
- Glass Block Mortar
- Knockdown Drywall
- Large Pipe Wrap
- Mastic for Large Pipe Wrap
- Small Pipe Wrap

- Mastic for Pipe Wrap
- Black Pipe Foam Insulation
- Silver Box Duct Wrap
- Silver Duct Wrap
- Silver Flex Duct Wrap
- White Duct Tape
- Mastic for Duct Tape
- Unfinished Drywall
- Silver Duct Tape
- Skylight Insulation Panel

INSPECTION FINDINGS

INITIAL LIMITED AHERA ASBESTOS SURVEY – January 15, 2021

All twenty-two (22) of the homogeneous building materials sampled during the January 2021 inspection within the Main Office, Lounge, Work Room, D1, Restroom, and Storage of Building 500 were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

2022 LIMITED AHERA ASBESTOS SURVEY – July 12, 2022

All twelve (12) of the homogeneous building materials sampled during the July 2022 inspection within the Janitor's Closet of Building 300 were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

2024 AHERA ASBESTOS INSPECTION – March 12, 2024

The thirty-nine (39) homogeneous building materials sampled during the March 2024 inspection within Kyrene Centennial Middle School were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

2025 AHERA ASBESTOS RE-INSPECTION – August 4-12, 2025

All fifty-four (54) of the homogeneous building materials sampled during the August 2025 inspection were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

As shown above, three hundred and seventy-nine (379) suspect homogeneous building materials were *assumed* to contain greater than one percent (>1%) asbestos.

RECOMMENDATIONS

Any building material within the Kyrene Centennial Middle School campus not identified in this inspection report that is not wood, glass, or metal, is a suspect ACBM and should not be removed, sanded, ground, abraded, or otherwise disturbed by any person without being first properly trained as per 40 CFR 763.92 and, or 29 CFR 1926.1101. For detailed recommendations, please refer to the Kyrene Centennial Middle School AHERA Management Plan.

The ACBM or assumed ACBM located within the structures of the Kyrene Centennial Middle School campus can be managed in compliance with the Kyrene Elementary School District AHERA Management Plan until such a time as these building materials become degraded, have become friable, or will be disturbed by ongoing maintenance, renovation, or a demolition activity. Prior to a renovation or demolition activity, the previously listed assumed ACBM should be sampled by an AHERA Certified Building Inspector to determine the presence of asbestos.


At least once every six (6) months after a management plan is in effect, the KESD should conduct periodic surveillance in each building that it leases, owns, or otherwise uses as a school building that contains ACBM.

At least once every three (3) years after a management plan is in effect, the KESD should conduct an inspection of all ACBM on the school campus.

The AHERA inspection is limited to only the interior of the buildings and the underside of any covered walkways. This would mean that the additional suspect building materials found on the exterior of the buildings or structures, that are not regulated by AHERA are regulated by EPA NESHAP and OSHA. Therefore, prior to any disturbance of these un-sampled or newly installed suspect building materials, Dominion recommends that these suspect materials be sampled by an AHERA Certified Building Inspector and analyzed for asbestos content by a qualified laboratory prior to any disturbance.

The property owner or his representatives should retain the services of an independent asbestos consulting firm to monitor the performance of any asbestos abatement activities. The consulting firm should oversee the completeness of any asbestos removal and verify the quality of the air during the removal work and perform final clearance air sampling in accordance with the AHERA guidelines.

All documentation is being provided to the Kyrene Elementary School District and must be retained as a permanent record. Should you have any questions regarding the procedures that were followed on this project, please contact Dominion at any time. Thank you for the opportunity to provide these environmental consulting services.



2025 AHERA Building Inspector
Nick Marcos
AHERA Certificate Number: ON-188748-8873-031325
Expires: March 13, 2026

Historical Information:

2024 AHERA Building Inspector
Tracey Carpenter
AHERA Certificate Number: ON-4644-14588-091422
Expired: September 14, 2023


2022 AHERA Building Inspector
Nick Marcos
AHERA Certificate Number: ON-4644-8873-032422
Expired: March 24, 2023

2021 AHERA Building Inspector
Garth Backman
AHERA Certificate Number: ON-4644-12304-071621
Expired: July 16, 2022

SECTION 4

♦

SITE MAPS

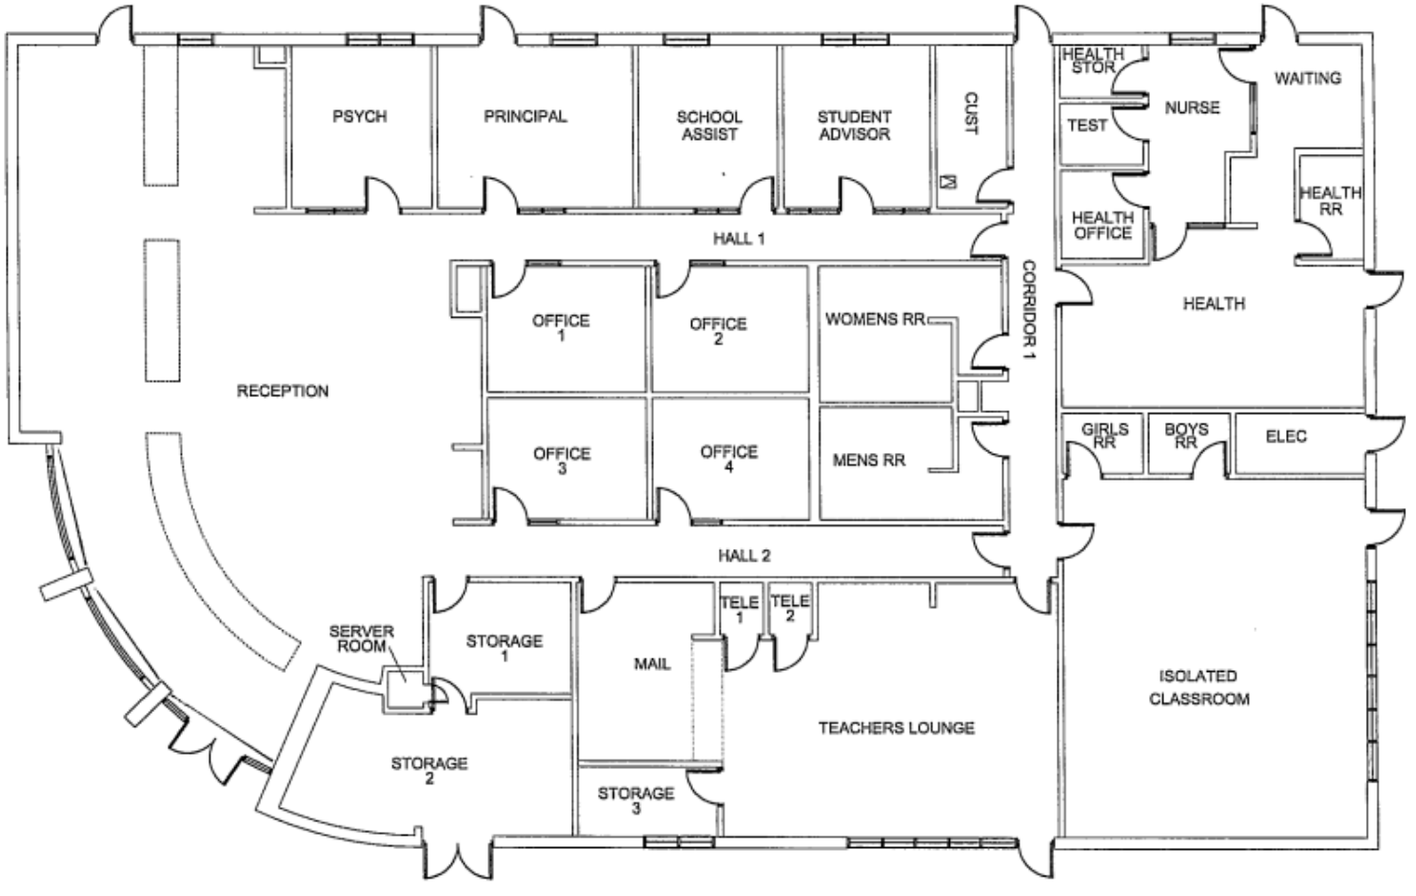


Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Admin Building

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

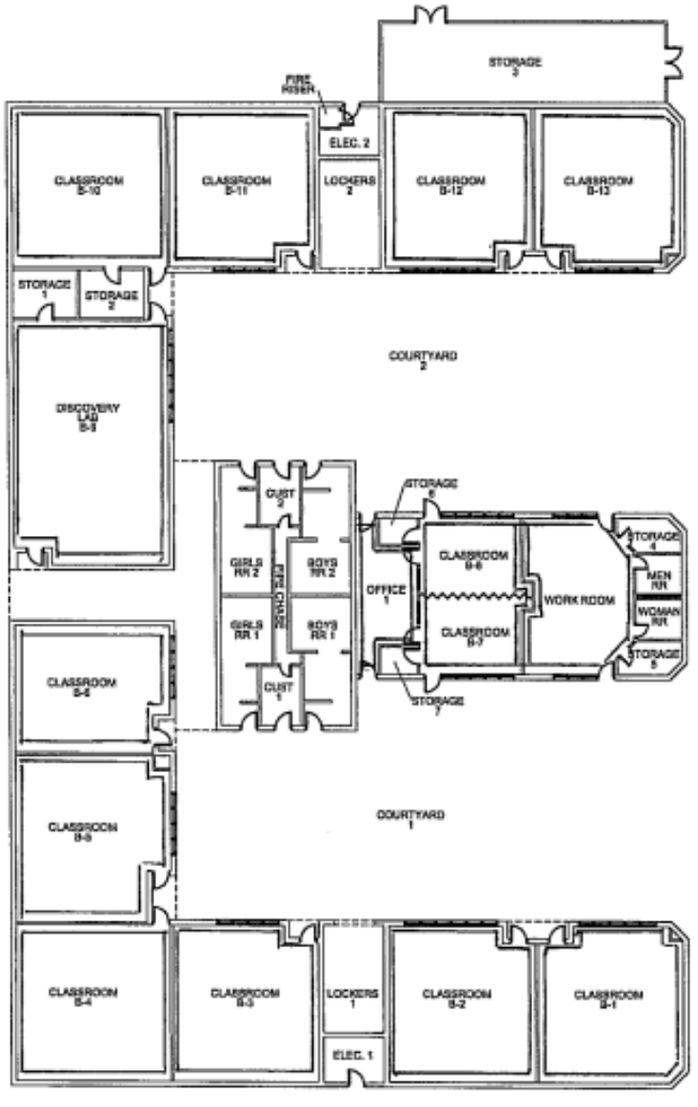


Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building B

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

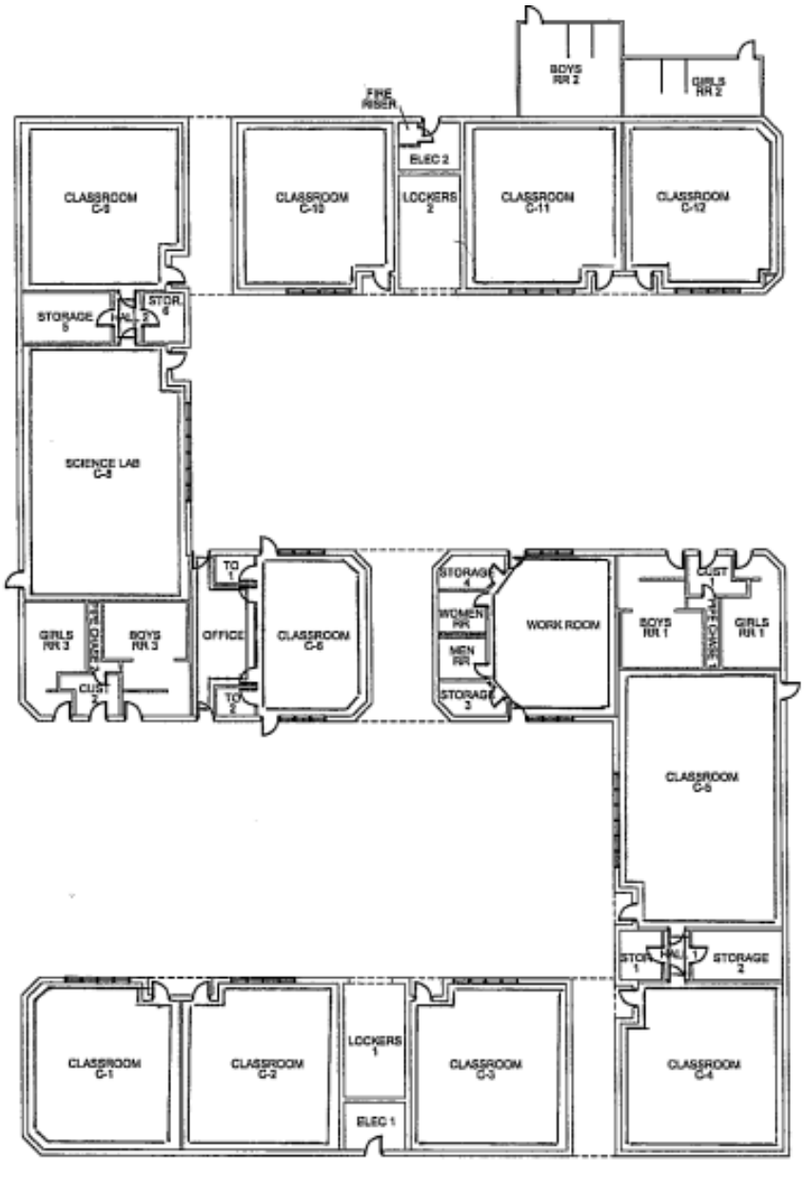


Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building C

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

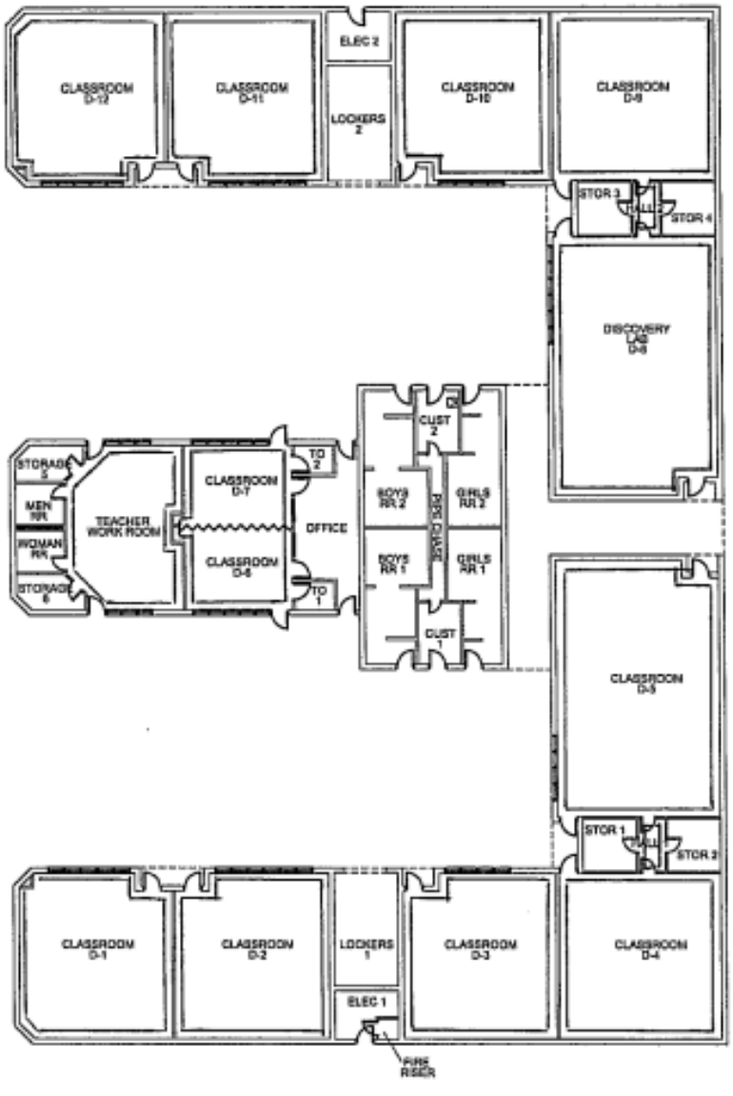


N

Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building D

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

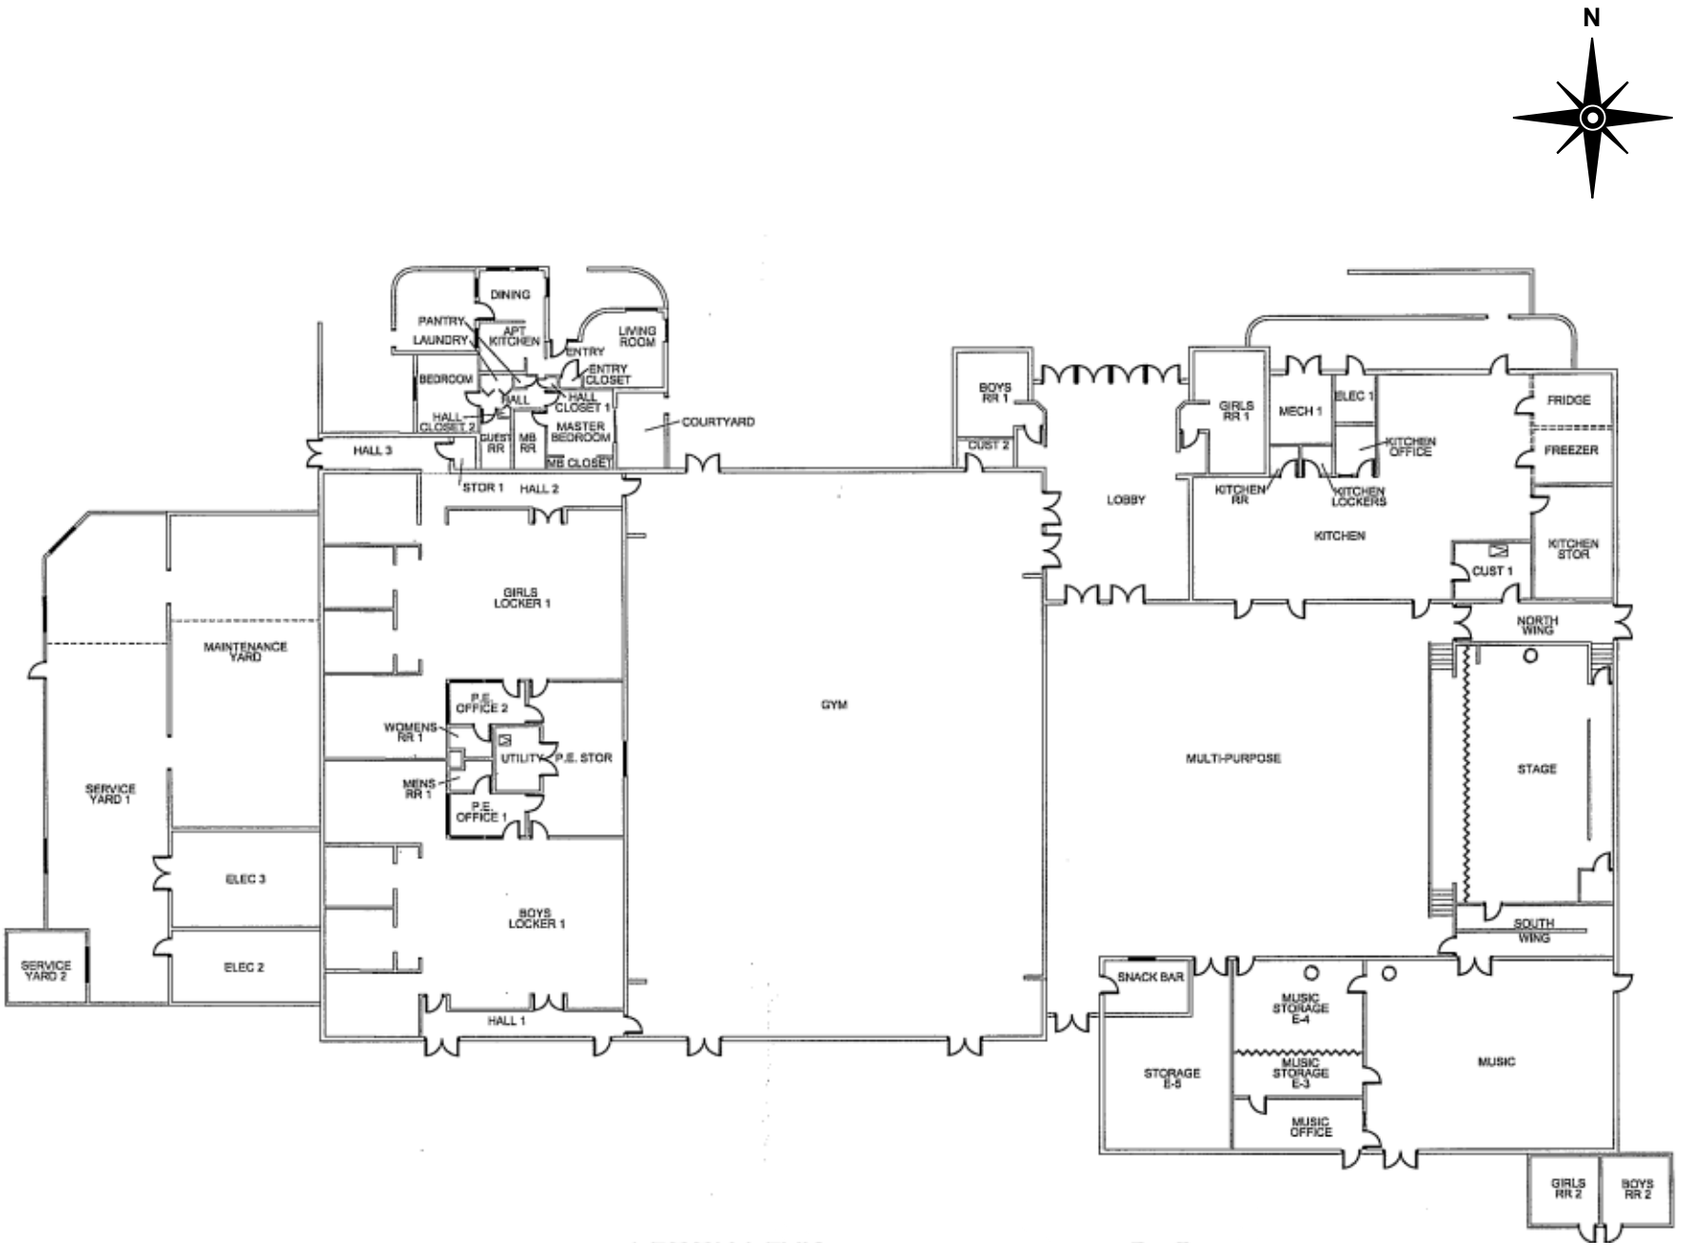


Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building E

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

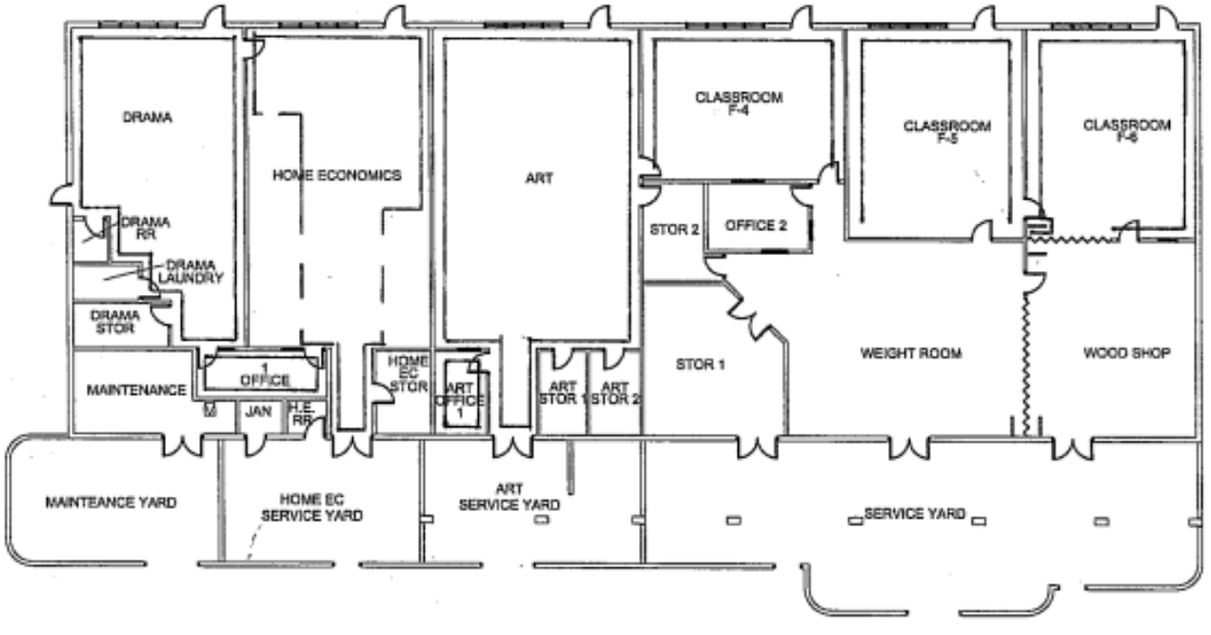


Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building F

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

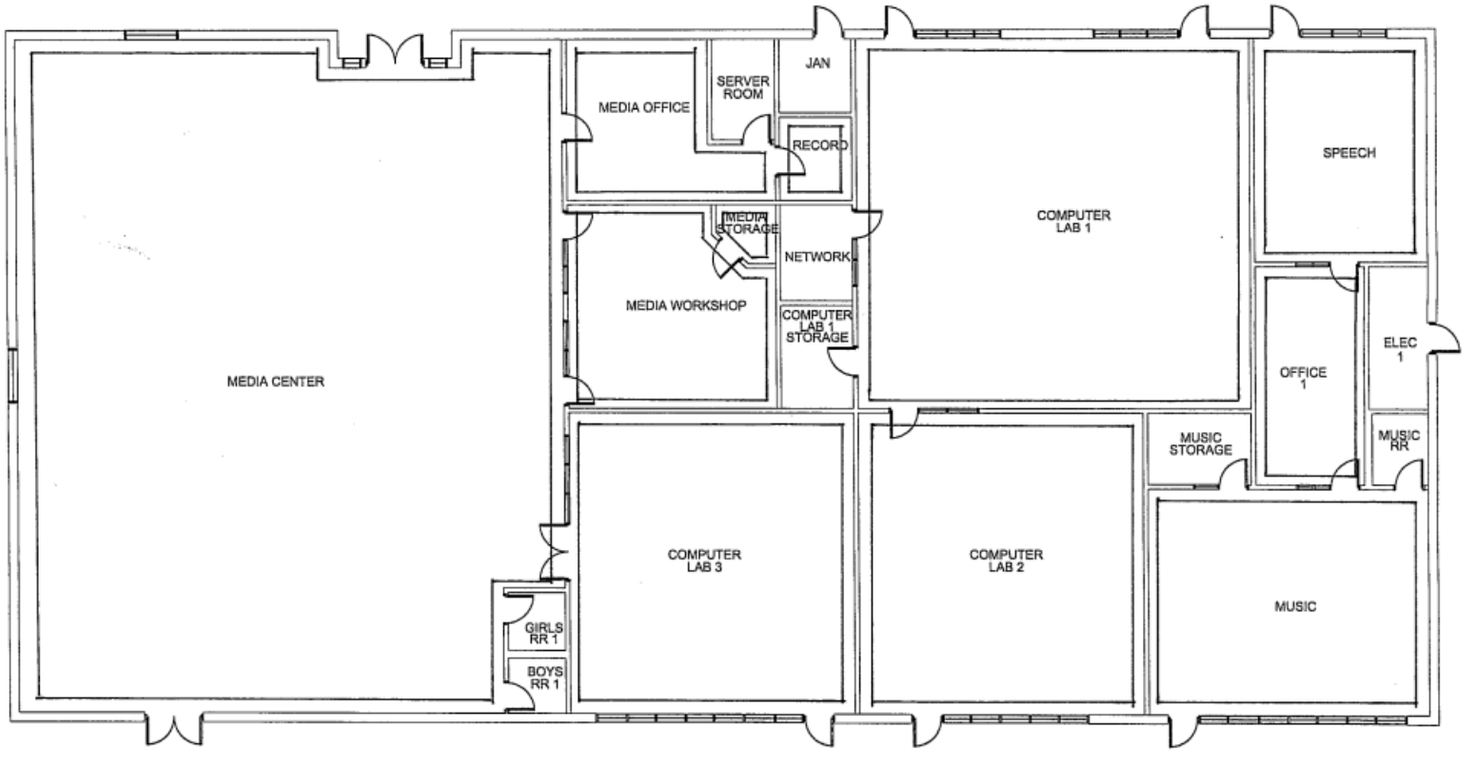


Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building G

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

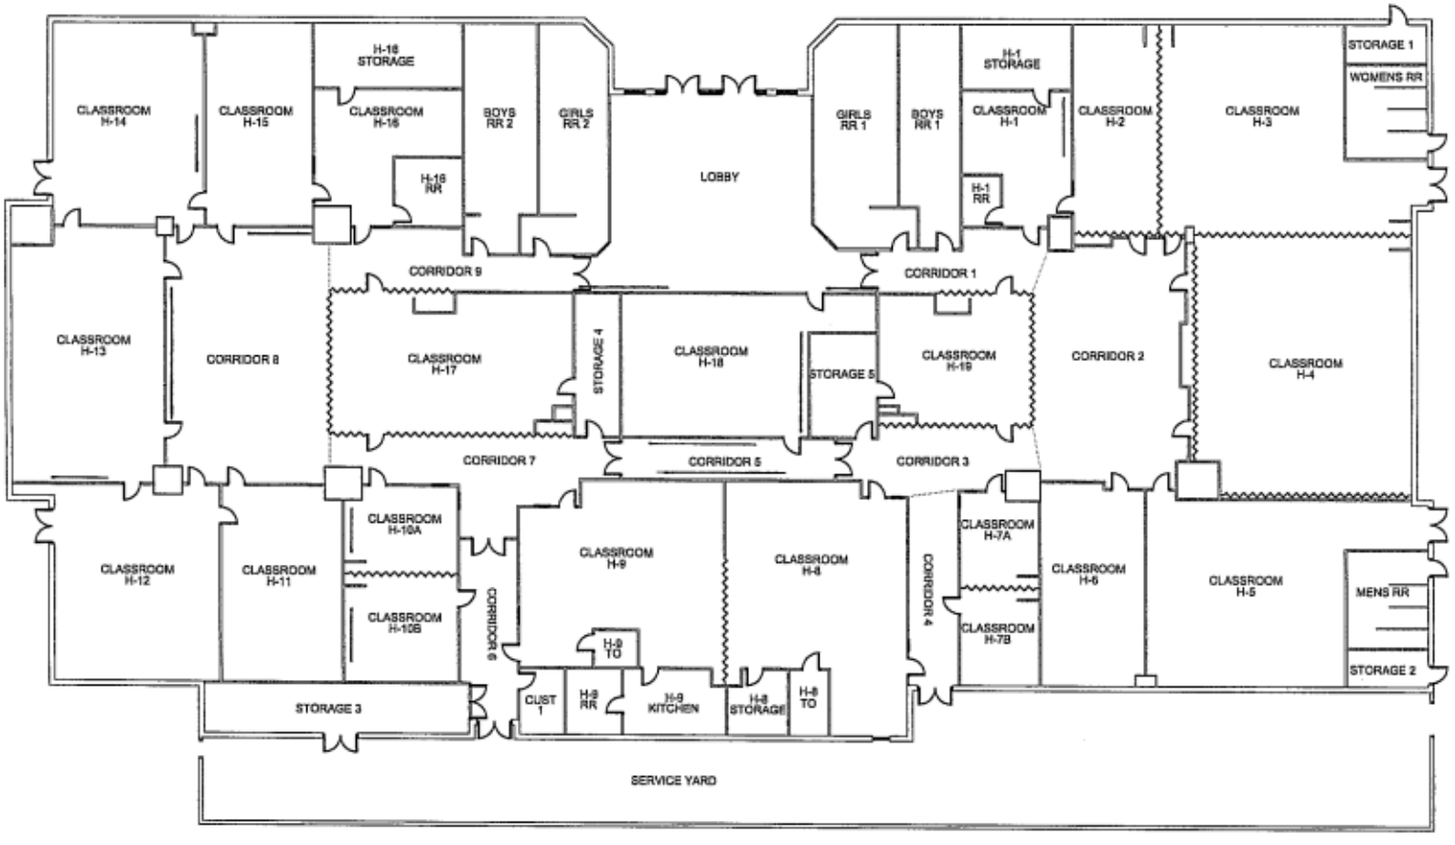

Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building H

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

SECTION 5

♦

HOMOGENEOUS MATERIALS INVENTORY LISTS

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.54	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 3/12/2024 + 8/4/2025	**Site: Kyrene Centennial Middle School - Admin Building**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
Inspection Date: 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)						
1	Skip Trowel Drywall System - Peach Paint #1	Custodian and Restroom	No	No	M	3,000
	White Texture #1		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound #1		No	No	M	
	Peach Paint #2		No	No	M	
	White Joint Compound #2		No	No	M	
	Yellow Tape (Mesh)		No	No	M	
	Peach Paint #3		No	No	M	
	White Texture #2		No	No	M	
	White Drywall with Brown Paper		No	No	M	
2	White w/Gray Specks 12" x 12"' VCT	Custodian and Restroom	No	No	M	5000
3	Semi-Transparent Mastic for 12" x 12" VCT		No	No	M	5000
Inspection Date: 8/4/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)						
4	New 2' x 2' Ceiling Tile	Throughout Building	No	No	M	20,000
5	Old 2' x 2' Ceiling Tile	Throughout Building	No	No	M	30,000
6	Gray Multi-Color Carpet Square	Front Office and ISI Room	No	No	M	50,000
7	Tan Mastic for Gray Multi-Color Carpet Square		No	No	B	50,000
8	Blue Cove Base	Hallway and Office	No	No	M	750
9	Cream Mastic Blue Cove Base		No	No	M	
10	Beige Paint	Throughout Building	No	No	M	20,000
	Orange Peel Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Assumed Material						
11	**Black Carpet Square**	**Throughout Building**	**Assumed**	**No**	**M**	**1,000**
12	**Mastic for Black Carpet Square**		**Assumed**	**No**	**M**	

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.54	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 3/12/2024 + 8/4/2025	Site: Kyrene Centennial Middle School - Admin Building

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
13	Interior Caulking	Throughout Building	Assumed	No	M	200
14	Exterior Caulking	Throughout Building	Assumed	No	M	200
15	Tackboard	Offices	Assumed	No	M	15,000
16	Mastic for Tackboard		Assumed	No	M	
17	Window Glazing	Throughout Building	Assumed	No	M	100
18	Brick	Building Exterior	Assumed	No	M	100,000
19	Mortar for Brick		Assumed	No	M	
20	Glass Block Mortar	Building Entrance	Assumed	No	M	500
21	Block	Building Exterior	Assumed	No	M	50,000
22	Mortar for Block		Assumed	No	M	
23	Black Sink Coating	Teachers Lounge/Break Room	Assumed	No	M	50
24	Gray Wallpaper	Telephone Room	Assumed	No	M	750
25	Fixture Caulking	Restrooms	Assumed	No	M	100
26	FRP	Custodian and Drinking Fountains Throughout	Assumed	No	M	250
27	Mastic for FRP		Assumed	No	M	
28	Brown Cove Base	Custodian	Assumed	No	M	100
29	Mastic for Brown Cove Base		Assumed	No	M	
30	Knockdown Drywall System	Custodian	Assumed	No	M	1,500
31	Tan Striped Wallpaper	Nurses Closet	Assumed	No	M	500
32	Large Pipe Wrap	Above Ceiling	Assumed	No	M	3,000
33	Mastic for Large Pipe Wrap		Assumed	No	M	
34	Small Pipe Wrap	Above Ceiling	Assumed	No	M	1,500
35	Mastic for Small Pipe Wrap		Assumed	No	M	
36	Black Pipe Insulation Foam	Above Ceiling	Assumed	No	TSI	500
37	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	5,000
38	Silver Duct Wrap	Above Ceiling	Assumed	No	M	5,000
39	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	3,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.54	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 3/12/2024 + 8/4/2025	Site: Kyrene Centennial Middle School - Admin Building

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
40	White Duct Seam Tape	Above Ceiling	Assumed	No	M	1,000
41	Mastic for Duct Seam Tape		Assumed	No	M	
42	Unfinished Drywall System	Above Ceiling	Assumed	No	M	20,000
43	Silver Duct Tape	Above Ceiling	Assumed	No	M	250

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 3/12/2024 + 8/5/2025	**Site: Kyrene Centennial Middle School - Building B**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
Inspection Date: 3/11/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)						
1	Tan Ceramic Tile	Restrooms	No	No	M	250
2	Cream Mastic for Tile		No	No	M	250
3	Gray Grout for Tile		No	No	M	100
4	Gray Mortar for Tile		No	No	M	100
5	White Ceramic Tile ND	Restrooms	No	No	M	250
6	Gray Grout ND		No	No	M	100
7	Gray Caulk ND		No	No	M	100
8	Tan Mastic		No	No	M	250
Inspection Date: 8/5/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)						
9	New 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	20000
10	Old 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	30000
11	Gray Multi-Color Carpet Square	Classrooms	No	No	M	15000
12	Yellow Mastic for Carpet Square		No	No	M	
13	Blue Cove Base	Classrooms	No	No	M	500
14	Yellow Mastic for Cove Base		No	No	M	
15	Orange Peel Drywall System - Off-White Paint	Throughout Building	No	No	M	75000
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Assumed Material						
16	**Black Entry Carpet**	**Entrances**	**Assumed**	**No**	**M**	**375**
17	**Mastic for Entry Carpet**		**Assumed**	**No**	**M**	
18	**Interior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**200**
19	**Exterior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**200**
20	**Black Sink Coating**	**Classrooms**	**Assumed**	**No**	**M**	**60**
21	**FRP**	**Custodial and Drinking Fountains**	**Assumed**	**No**	**M**	**350**
22	**Mastic for FRP**		**Assumed**	**No**	**M**	

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 3/12/2024 + 8/5/2025	Site: Kyrene Centennial Middle School - Building B

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
23	Tackboard	Classrooms	Assumed	No	M	15,000
24	Mastic for Tackboard		Assumed	No	M	
25	White 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	3,000
26	Grout for White 2" x 2" Ceramic Floor Tile		Assumed	No	M	
27	Thinset for White 2" x 2" Ceramic Floor Tile		Assumed	No	M	
28	Peach 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	1,000
29	Grout for Peach 2" x 2" Ceramic Floor Tile		Assumed	No	M	
30	Thinset for Peach 2" x 2" Ceramic Floor Tile		Assumed	No	M	
31	Blue 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	1,000
32	Grout for Blue 2" x 2" Ceramic Floor Tile		Assumed	No	M	
33	Thinset for Blue 2" x 2" Ceramic Floor Tile		Assumed	No	M	
34	Off-White 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	5,000
35	Grout for Off-White 4" x 4" Ceramic Wall Tile		Assumed	No	M	
36	Mastic for Off-White 4" x 4" Ceramic Wall Tile		Assumed	No	M	
37	Peach 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	1,000
38	Grout for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
39	Mastic for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
40	Fixture Caulking	Restrooms	Assumed	No	M	100
41	Brown Cove Base	Custodial	Assumed	No	M	45
42	Mastic for Cove Base		Assumed	No	M	
43	White w. Black 12" x 12" VCT	B7 Closets, Work Room RR's, and Storage Rooms	Assumed	No	M	3,000
44	Mastic for White w. Black 12" x 12" VCT		Assumed	No	M	
45	Knockdown Drywall System	Electrical	Assumed	No	M	2,000
46	Brick	Building Exterior	Assumed	No	M	100,000
47	Mortar for Brick		Assumed	No	M	
48	Expansion Joint	Building Exterior	Assumed	No	M	200
49	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	5,000
50	Silver Duct Wrap	Above Ceiling	Assumed	No	M	4,000
51	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	3,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 3/12/2024 + 8/5/2025	Site: Kyrene Centennial Middle School - Building B

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
52	White Duct Tape	Above Ceiling	Assumed	No	M	1,000
53	Mastic for Duct Tape		Assumed	No	M	
54	Large Pipe Wrap	Above Ceiling	Assumed	No	M	3,000
55	Mastic for Pipe Wrap		Assumed	No	M	
56	Small Pipe Wrap	Above Ceiling	Assumed	No	M	2,000
57	Mastic for Pipe Wrap		Assumed	No	M	
58	Unfinished Drywall System	Above Ceiling	Assumed	No	M	20,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 3/12/2024 + 8/5/2025	**Site: Kyrene Centennial Middle School - Building C**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
Inspection Date: 3/11/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)						
1	White Ceramic Tile	Restrooms	No	No	M	250
2	Gray Grout for Tile		No	No	M	
3	Tan Mastic for Tile		No	No	M	
Inspection Date: 8/5/2025 - AHERA Building Inspector: Nick Marcos(ON-188748-8873-031325)						
4	New 2' x 2' Ceiling Tile	Throughout Building	No	No	M	20,000
5	Old 2' x 2' Ceiling Tile	Throughout Building	No	No	M	30,000
6	Gray Multi-Color Carpet Square	Conference Room and Classrooms	No	No	M	15,000
7	Tan Mastic for Gray Multi-Color Carpet Square		No	No	M	
8	Blue Cove Base	Classrooms	No	No	M	500
9	Cream Mastic for Blue Cove Base		No	No	M	
10	Orange Peel Drywall - Cream Paint	Throughout Building	No	No	M	75000
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	Cream Tape 2		No	No	M	
	White Joint Compound 2		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Assumed Material						
11	**Black Entry Carpet**	**Entrance to Building**	**Assumed**	**No**	**M**	**375**
12	**Mastic for Entry Carpet**		**Assumed**	**No**	**M**	
13	**Interior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**200**
14	**Black Sink Coating**	**Sinks Throughout Building**	**Assumed**	**No**	**M**	**60**
15	**Exterior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**200**
16	**Tacboard**	**Throughout Building**	**Assumed**	**No**	**M**	**15000**
17	**Mastic for Tacboard**		**Assumed**	**No**	**M**	
18	**Knockdown Drywall System**	**Electrical**	**Assumed**	**No**	**M**	**2,000**
19	**Brown Cove Base**	**Electrical and Custodial**	**Assumed**	**No**	**M**	**45**
20	**Mastic for Cove Base**		**Assumed**	**No**	**M**	

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 3/12/2024 + 8/5/2025	Site: Kyrene Centennial Middle School - Building C

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
21	White w. Black 12" x 12" VCT	Storage and Work Room Restroom	Assumed	No	M	3,000
22	Mastic for White w. Black 12" x 12" VCT		Assumed	No	M	
23	Divider Wall	Rooms C6 and C7	Assumed	No	M	2,000
24	White 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	3,000
25	Grout for White 2" x 2" Ceramic Floor Tile		Assumed	No	M	
26	Thinset White 2" x 2" Ceramic Floor Tile		Assumed	No	M	
27	Peach 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	1,000
28	Grout for Peach 2" x 2" Ceramic Floor Tile		Assumed	No	M	
29	Thinset Peach2" x 2" Ceramic Floor Tile		Assumed	No	M	
30	Blue 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	1,000
31	Grout for Blue 2" x 2" Ceramic Floor Tile		Assumed	No	M	
32	Thinset Blue 2" x 2" Ceramic Floor Tile		Assumed	No	M	
33	Off-white 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	5,000
34	Grout for Off-white 4" x 4" Ceramic Wall Tile		Assumed	No	M	
35	Mastic Blue Off-white 4" x 4" Ceramic Wall Tile		Assumed	No	M	
36	Peach 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	1,000
37	Grout for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
38	Mastic Blue Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
39	Fixture Caulking	Restrooms	Assumed	No	M	100
40	FRP	Custodial	Assumed	No	M	350
41	Mastic for FRP		Assumed	No	M	
42	Black Countertops	Rooms C5 and C8	Assumed	No	M	5,000
43	Brick	Building Exterior	Assumed	No	M	100,000
44	Mortar for Brick		Assumed	No	M	
45	Expansion Joint	Building Exterior	Assumed	No	M	200
46	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	5,000
47	Silver Duct Wrap	Above Ceiling	Assumed	No	M	4,000
48	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	3,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 3/12/2024 + 8/5/2025	Site: Kyrene Centennial Middle School - Building C

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
49	White Duct Tape	Above Ceiling	Assumed	No	M	1,000
50	Mastic for Duct Tape		Assumed	No	M	
51	Large Pipe Wrap	Above Ceiling	Assumed	No	M	3,000
52	Mastic for Large Pipe Wrap		Assumed	No	M	
53	Small Pipe Wrap	Above Ceiling	Assumed	No	M	2,000
54	Mastic for Small Pipe Wrap		Assumed	No	M	
55	Unfinished Drywall System	Above Ceiling	Assumed	No	M	20,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 7/11/22 + 3/12/24 + 8/5/25	**Site: Kyrene Centennial Middle School - Building D**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
Inspection Date:7/11/2022 - AHERA Building Inspector: Nick Marcos (ON-4644-8873-032422)						
1	Orange Peel Drywall - Off-White Paint #3	Throughout Building	No	No	M	75,000
	White Texture #3		No	No	M	
	Off-White Paint #4		No	No	M	
	White Texture #4		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	Brown Drywall with Brown/Green Paper		No	No	M	
2	Brown Cove Base	Faculty Restroom	No	No	M	15
3	Yellow Mastic for Brown Cove Base		No	No	M	
4	Blue Cove Base	Faculty Restroom	No	No	M	15
5	Yellow Mastic for Blue Cove Base		No	No	M	
6	Counter Caulking	Faculty Restroom	No	No	M	10
7	Fixture Caulking	Faculty Restroom	No	No	M	10
Inspection Date: 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)						
8	White Ceramic Tile	Restrooms	No	No	M	400
9	Gray Grout for Tile		No	No	M	
10	Tan Mastic for Tile		No	No	M	
11	2" x 2" Tan Floor Tiles	Restrooms	No	No	M	350
12	Gray Grout for Tile		No	No	M	
13	Yellow Mastic for Tile		No	No	M	
14	2" x 2" Pink Floor Tile	Restrooms	No	No	M	300
15	Gray Grout for Tile		No	No	M	
16	Beige Thinset for Tile		No	No	M	
17	2" x 2" Green Floor Tile	Restrooms	No	No	M	300
18	Gray Grout for Tile		No	No	M	
19	Beige Thinset for Tile		No	No	M	
Inspection Date: 8/5/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)						
20	New 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	20,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 7/11/22 + 3/12/24 + 8/5/25	**Site: Kyrene Centennial Middle School - Building D**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
21	Old 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	30,000
22	Gray Multicolored Carpet Square	Classrooms	No	No	M	15,000
23	Multicolored Mastic for Carpet Square		No	No	M	
24	Blue Cove Base	Classrooms	No	No	M	500
25	Cream Mastic for Cove Base		No	No	M	
26	Orange Peel Drywall - Off-White Paint	Throughout Building	No	No	M	75,000
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Assumed Material						
27	**Black Entry Carpet**	**Entrance to Building**	**Assumed**	**No**	**M**	**375**
28	**Mastic for Entry Carpet**		**Assumed**	**No**	**M**	
29	**Interior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**200**
30	**Exterior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**200**
31	**Black Sink Coating**	**Classrooms**	**Assumed**	**No**	**M**	**60**
32	**Tackboard**	**Throughout Building**	**Assumed**	**No**	**M**	**15,000**
33	**Mastic for Tackboard**		**Assumed**	**No**	**M**	
34	**Knockdown Drywall**	**Electrical Room**	**Assumed**	**No**	**M**	**2,000**
35	**White w. Black 12" x 12" VCT**	**Storage Rooms**	**Assumed**	**No**	**M**	**3,000**
36	**Mastic for White w. Black 12" x 12" VCT**		**Assumed**	**No**	**M**	
37	**Black Countertops**	**Rooms D5 and D8**	**Assumed**	**No**	**M**	**5,000**
38	**FRP**	**Custodial**	**Assumed**	**No**	**M**	**350**
39	**Mastic for FRP**		**Assumed**	**No**	**M**	
40	**Brown Cove Base**	**Storage Rooms**	**Assumed**	**No**	**M**	**45**
41	**Mastic for Cove Base**		**Assumed**	**No**	**M**	
42	**Divider Wall**	**Rooms D6 and D7**	**Assumed**	**No**	**M**	**2,000**

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 7/11/22 + 3/12/24 + 8/5/25	Site: Kyrene Centennial Middle School - Building D

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
43	White 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	3,000
44	Grout for White 2" x 2" Ceramic Floor Tile		Assumed	No	M	
45	Thinset for White 2" x 2" Ceramic Floor Tile		Assumed	No	M	
46	Peach 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	1,000
47	Grout for Peach 2" x 2" Ceramic Floor Tile		Assumed	No	M	
48	Thinset for Peach 2" x 2" Ceramic Floor Tile		Assumed	No	M	
49	Blue 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	1,000
50	Grout for Blue 2" x 2" Ceramic Floor Tile		Assumed	No	M	
51	Thinset for Blue 2" x 2" Ceramic Floor Tile		Assumed	No	M	
52	Off-White 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	5,000
53	Grout for Off-White 4" x 4" Ceramic Wall Tile		Assumed	No	M	
54	Mastic for Off-White 4" x 4" Ceramic Wall Tile		Assumed	No	M	
55	Peach 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	1,000
56	Grout for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
57	Mastic for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
58	Fixture Caulking	Restrooms	Assumed	No	M	100
59	Brick	Building Exterior	Assumed	No	M	100,000
60	Mortar for Brick		Assumed	No	M	
61	Expansion Joint	Building Exterior	Assumed	No	M	200
62	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	5,000
63	Silver Duct Wrap	Above Ceiling	Assumed	No	M	4,000
64	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	3,000
65	White Duct Tape	Above Ceiling	Assumed	No	M	1,000
66	Mastic for Duct Tape		Assumed	No	M	
67	Large Pipe Wrap	Above Ceiling	Assumed	No	M	3,000
68	Mastic for Large Pipe Wrap		Assumed	No	M	
69	Small Pipe Wrap	Above Ceiling	Assumed	No	M	2,000
70	Mastic for Small Pipe Wrap		Assumed	No	M	
71	Unfinished Drywall System	Above Ceiling	Assumed	No	M	20,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025	**Site: Kyrene Centennial Middle School - Building E**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
Inspection Date: 9/29/2021 - AHERA Building Inspector: Garth Backman (ON-4644-12304-071621)						
1	Drywall - Beige Paint	Kitchen	No	No	M	2,500
	White Texture		No	No	M	
	Off-White Paint		No	No	M	
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Inspection Date: 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)						
2	Red 12" x 12" VCT	Service Line	No	No	M	450
3	Mastic for Red 12" x 12" VCT		No	No	M	450
4	Brown Stair Tread	Stage	No	No	M	250
5	Cream Mastic for Brown Stair Tread		No	No	M	
6	White RR Wall Tiles	Restrooms	No	No	M	4000
7	Grout for White RR Wall Tiles		No	No	M	
8	White 2"x2" Floor Tiles	Restrooms	No	No	M	3000
9	Dark Gray Grout for Tile		No	No	M	
10	Dark Gray Thinset for Tile		No	No	M	
Inspection Date: 8/6/2025 - AHERA Building Inspector: ()						
11	New 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	40,000
12	Old 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	50000
13	Peach Soundboard Wrap	Band Room	No	No	M	3,000
14	Yellow Adhesive for Wrap		No	No	M	
15	Gray Multicolored Carpet Square	Storage Room and Classroom	No	No	M	6,000
16	Multicolored Mastic for Carpet Square		No	No	M	

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025	Site: Kyrene Centennial Middle School - Building E

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
17	Orange Peel Drywall - Off-White Paint	Throughout Building	No	No	M	90,000
	White Texture		No	No	M	
	Yellow Paint		No	No	M	
	White Texture 2		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
18	2' x 4' Ceiling Tile	Apartment Unit	No	No	M	2,000
Assumed Material						
19	**Black Entry Carpet**	**Building Entrance**	**Assumed**	**No**	**M**	**500**
20	**Mastic**		**Assumed**	**No**	**M**	
21	**Blue Cove Base**	**Throughout Building**	**Assumed**	**No**	**M**	**750**
22	**Mastic for Cove Base**		**Assumed**	**No**	**M**	
23	**Interior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**200**
24	**Exterior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**200**
25	**Black Window Glazing**	**Windows Throughout**	**Assumed**	**No**	**M**	**300**
26	**Black Sink Coating**	**Classrooms Throughout**	**Assumed**	**No**	**M**	**50**
27	**Divider Wall**	**Stage**	**Assumed**	**No**	**M**	**1500**
28	**Blue 6" Cove Base**	**Ramp**	**Assumed**	**No**	**M**	**150**
29	**Mastic for Blue 6" Cove Base**		**Assumed**	**No**	**M**	
30	**Black 6" Cove Base**	**Multipurpose Room**	**Assumed**	**No**	**M**	**350**
31	**Mastic for Black 6" Cove Base**		**Assumed**	**No**	**M**	
32	**Gray Speckled 12" x 12" VCT**	**Gym Janitors Closet**	**Assumed**	**No**	**M**	**150**
33	**Mastic for Gray VCT**		**Assumed**	**No**	**M**	
34	**Brick**	**Throughout Building**	**Assumed**	**No**	**M**	**150,000**
35	**Mortar for Brick**		**Assumed**	**No**	**M**	
36	**Expansion Joint**	**Throughout Building**	**Assumed**	**No**	**M**	**250**
37	**Black L Shaped Cove Base**	**Stage and Gym**	**Assumed**	**No**	**M**	**500**
38	**Mastic for L Shaped Cove Base**		**Assumed**	**No**	**M**	

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025	Site: Kyrene Centennial Middle School - Building E

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
39	Old FRP	Ramp Hallway and Gym Janitors Closet	Assumed	No	M	750
40	Mastic for Old FRP		Assumed	No	M	
41	Tackboard	Throughout Building	Assumed	No	M	15,000
42	Mastic for Tackboard		Assumed	No	M	
43	Brown 6" Cove Base	Stage Entry	Assumed	No	M	45
44	Mastic for 6" Cove Base		Assumed	No	M	
45	Brown 4" Cove Base	Locker Room Storage	Assumed	No	M	75
46	Mastic for Brown 4" Cove Base		Assumed	No	M	
47	White w/ Gray Specks 12" X 12" VCT	Northeast Stage Entry	Assumed	No	M	100
48	Mastic		Assumed	No	M	
49	New FRP	Kitchen and Custodial	Assumed	No	M	1,500
50	Mastic for New FRP		Assumed	No	M	
51	Brown 6" x 6" Ceramic Floor Tile	Kitchen and Snack Bar	Assumed	No	M	10,000
52	Grout for Brown 6" x 6" Ceramic Floor Tile		Assumed	No	M	
53	Thinset for Brown 6" x 6" Ceramic Floor Tile		Assumed	No	M	
54	Brown 4" x 6" Ceramic Cove Base	Kitchen and Snack Bar	Assumed	No	M	1,500
55	Mastic for Brown 4" x 6" Ceramic Cove Base		Assumed	No	M	
56	Drywall 2' x 4' Ceiling Tile	Kitchen and Snack Bar	Assumed	No	M	3,000
57	Polished Concrete	Throughout Building	Assumed	No	M	15,000
58	Floor Expansion Joint for Polished Concrete		Assumed	No	M	150
59	White w. Black 12" x 12" VCT	Locker Room Storage	Assumed	No	M	250
60	Mastic for 12" x 12" VCT		Assumed	No	M	
61	Black 4" Cove Base	Lobby and Locker Rooms	Assumed	No	M	300
62	Mastic for Black 4" Cove Base		Assumed	No	M	
63	White 4" x 4" Ceramic Wall Tile	Lobby Restrooms and Locker Rooms	Assumed	No	M	6,000
64	Grout for White 4" x 4" Ceramic Wall Tile		Assumed	No	M	
65	Mastic for White 4" x 4" Ceramic Wall Tile		Assumed	No	M	

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025	Site: Kyrene Centennial Middle School - Building E

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
66	Red 4" x 4" Ceramic Wall Tile	Lobby Restrooms and Locker Rooms	Assumed	No	M	2,000
67	Grout for Red 4" x 4" Ceramic Wall Tile		Assumed	No	M	
68	Mastic for Red 4" x 4" Ceramic Wall Tile		Assumed	No	M	
69	Black 4" x 4" Ceramic Wall Tile	Lobby Restrooms and Locker Rooms	Assumed	No	M	500
70	Grout for Black 4" x 4" Ceramic Wall Tile		Assumed	No	M	
71	Mastic for Black 4" x 4" Ceramic Wall Tile		Assumed	No	M	
72	Gray Floor Coating	Lobby Restrooms	Assumed	No	M	1,500
73	Fixture Caulking	Restrooms	Assumed	No	M	200
74	Glass Block Mortar	Main Entry's	Assumed	No	M	350
75	Red 3" x 12" Ceramic Wall Tile	Lobby Restroom	Assumed	No	M	3,000
76	Gray FRP	Locker Room Hallways	Assumed	No	M	2,000
77	Mastic for FRP		Assumed	No	M	
78	Concrete Benches	Locker Rooms	Assumed	No	M	2,500
79	Gray 6" x 6" Ceramic Floor Tile	Locker Rooms Showers	Assumed	No	M	3,000
80	Grout for Gray 6" x 6" Ceramic Floor Tile		Assumed	No	M	
81	Thinset for Gray 6" x 6" Ceramic Floor Tile		Assumed	No	M	
82	Green Speckled 2" x 2" Ceramic Floor Tile	Main Exterior Restrooms	Assumed	No	M	500
83	Grout for Ceramic Floor Tile		Assumed	No	M	
84	Thinset for Ceramic Floor Tile		Assumed	No	M	
85	Gray 2" x 2" Ceramic Floor Tile	Main Exterior Restrooms	Assumed	No	M	500
86	Grout for Ceramic Floor Tile		Assumed	No	M	
87	Thinset for Ceramic Floor Tile		Assumed	No	M	
88	Peach 4" x 4" Ceramic Wall Tile	Main Exterior Restrooms	Assumed	No	M	500
89	Grout for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
90	Thinset for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
91	Gray 4" x 4" Ceramic Wall Tile	Main Exterior Restrooms	Assumed	No	M	500
92	Grout for Gray 4" x 4" Ceramic Wall Tile		Assumed	No	M	
93	Thinset for Gray 4" x 4" Ceramic Wall Tile		Assumed	No	M	

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025	Site: Kyrene Centennial Middle School - Building E

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
94	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	6,000
95	Silver Duct Wrap	Above Ceiling	Assumed	No	M	5,000
96	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	4,000
97	White Duct Tape	Above Ceiling	Assumed	No	M	1,500
98	Mastic for Duct Tape	Above Ceiling	Assumed	No	M	
99	Gray Duct Mastic	Above Ceiling	Assumed	No	M	200
100	Large Pipe Wrap	Above Ceiling	Assumed	No	M	5,000
101	Mastic for Large Pipe Wrap		Assumed	No	M	
102	Small Pipe Wrap	Above Ceiling	Assumed	No	M	3,000
103	Mastic for Pipe Wrap		Assumed	No	M	
104	Unfinished Drywall	Above Ceiling	Assumed	No	M	25,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 8/4/2025	**Site: Kyrene Centennial Middle School - Building F**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
Inspection Date: 8/4/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)						
1	New 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	10,000
2	Old 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	15000
3	Lightly Textured 2' x 2' Ceiling Tile	FACS Room	No	Yes	M	2,000
4	Gray Multicolor Carpet Square	Classrooms	No	No	M	6500
5	Mastic for Gray Multicolor Carpet Square		No	No	M	
6	Orange Peel Drywall - White Paint	Throughout Building	No	No	M	50,000
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Assumed Material						
7	**Blue Cove Base**	**Classrooms**	**Assumed**	**No**	**M**	**350**
8	**Mastic for Blue Cove Base**		**Assumed**	**No**	**M**	
9	**Interior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**150**
10	**Exterior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**150**
11	**Black Window Glazing**	**Throughout Building**	**Assumed**	**No**	**M**	**100**
12	**Tackboard**	**Classrooms**	**Assumed**	**No**	**M**	**10,000**
13	**Mastic for Tackboard**		**Assumed**	**No**	**M**	
14	**White w. Black 12" x 12" VCT**	**Choir Storage, Restroom, and Laundry Room**	**Assumed**	**No**	**M**	**1,500**
15	**Mastic for VCT**		**Assumed**	**No**	**M**	
16	**Fixture Caulking**	**Restrooms**	**Assumed**	**No**	**M**	**100**
17	**Gray Sink Coating**	**Rooms F-1, F-3, and F-5**	**Assumed**	**No**	**M**	**15**
18	**Brown Cove Base**	**Choir Storage, Restroom, Dark Room, and Laundry Room**	**Assumed**	**No**	**M**	**100**
19	**Mastic for Brown Cove Base**		**Assumed**	**No**	**M**	
20	**Polished Concrete**	**Room F-2**	**Assumed**	**No**	**M**	**1,500**
21	**Floor Expansion Joint for Polished Concrete**		**Assumed**	**No**	**M**	**100**
22	**Gray Duct Mastic**	**Above Ceiling**	**Assumed**	**No**	**M**	**100**
23	**Black Rubber Gym Floor**	**Room F-5**	**Assumed**	**No**	**M**	**2,000**

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 8/4/2025	Site: Kyrene Centennial Middle School - Building F

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
24	Black Cove Base	Room F-5 and F-6 Backroom	Assumed	No	M	100
25	Mastic for Black Cove Base		Assumed	No	M	
26	Gray Wood Vinyl Flooring	Room F-5 and F-6 Backroom	Assumed	No	M	1,000
27	Mastic for Gray Wood Vinyl Flooring		Assumed	No	M	
28	Divider Wall	Room F-5 and F-6	Assumed	No	M	1,500
29	Brick	Throughout Building	Assumed	No	M	75,000
30	Mortar for Brick		Assumed	No	M	
31	Expansion Joint	Throughout Building	Assumed	No	M	150
32	Large Pipe Wrap	Above Ceiling	Assumed	No	M	3,000
33	Mastic for Large Pipe Wrap		Assumed	No	M	
34	Small Pipe Wrap	Above Ceiling	Assumed	No	M	2,000
35	Mastic for Pipe Wrap		Assumed	No	M	
36	Black Pipe Foam Insulation	Above Ceiling	Assumed	No	TSI	150
37	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	3,000
38	Silver Duct Wrap	Above Ceiling	Assumed	No	M	2,000
39	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	2,500
40	White Duct Tape	Above Ceiling	Assumed	No	M	200
41	Mastic for Duct Tape	Above Ceiling	Assumed	No	M	
42	Unfinished Drywall	Above Ceiling	Assumed	No	M	1,500
43	Silver Duct Tape	Above Ceiling	Assumed	No	M	150
44	Skylight Insulation Panel	Above Ceiling	Assumed	Yes	M	2,500

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 8/4/2025	**Site: Kyrene Centennial Middle School - Building G**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
Inspection Date: 8/4/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)						
1	Lightly Textured 2' x 2' Ceiling Tile	Media Center	No	Yes	M	2,500
2	New 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	10000
3	Old 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	15,000
4	Gray Multi-color Carpet Square	Media Center and Storage	No	No	M	
5	Mastic for Gray Multi-Color Carpet Square		No	No	M	10000
6	Orange Peel Drywall - Off-White Paint	Throughout Building	No	No	M	50,000
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Assumed Material						
7	**Black Entry Carpet**	**Building Entrances**	**Assumed**	**No**	**M**	**250**
8	**Mastic for Entry Carpet**		**Assumed**	**No**	**M**	
9	**Blue Cove Base**	**Throughout Building**	**Assumed**	**No**	**M**	**350**
10	**Mastic for Cove Base**		**Assumed**	**No**	**M**	
11	**Interior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**100**
12	**Exterior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**100**
13	**Black Sink Coating**	**Office Sink**	**Assumed**	**No**	**M**	**10**
14	**Tackboard**	**Classrooms and Media Center**	**Assumed**	**No**	**M**	**10,000**
15	**Mastic for Tackboard**		**Assumed**	**No**	**M**	
16	**White w. Black 12" x 12" VCT**	**Throughout Building**	**Assumed**	**No**	**M**	**750**
17	**Mastic for VCT**		**Assumed**	**No**	**M**	
18	**Green Wallpaper**	**Media Center Restroom**	**Assumed**	**No**	**M**	**400**
19	**Glass Block Mortar**	**Building Entrances**	**Assumed**	**No**	**M**	**250**
20	**White w. Gray 12" x 12" VCT**	**IDF Room**	**Assumed**	**No**	**M**	**350**
21	**Mastic for VCT**		**Assumed**	**No**	**M**	
22	**Gray Wallpaper**	**Storage**	**Assumed**	**No**	**M**	**250**
23	**Knockdown Drywall**	**Custodian Closet**	**Assumed**	**No**	**M**	**1,000**

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 8/4/2025	Site: Kyrene Centennial Middle School - Building G

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
24	Brown Cove Base	Computer Lab Storage	Assumed	No	M	45
25	Mastic for Brown Cove Base		Assumed	No	M	
26	Large Pipe Wrap	Above Ceiling	Assumed	No	M	3,000
27	Mastic for Large Pipe Wrap		Assumed	No	M	
28	Small Pipe Wrap	Above Ceiling	Assumed	No	M	2,000
29	Mastic for Pipe Wrap		Assumed	No	M	
30	Black Pipe Foam Insulation	Above Ceiling	Assumed	No	M	100
31	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	3,000
32	Silver Duct Wrap	Above Ceiling	Assumed	No	M	2,000
33	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	2,000
34	White Duct Tape	Above Ceiling	Assumed	No	M	250
35	Mastic for Duct Tape	Above Ceiling	Assumed	No	M	
36	Unfinished Drywall	Above Ceiling	Assumed	No	M	10,000
37	Silver Duct Tape	Above Ceiling	Assumed	No	M	50
38	Skylight Insulation Panel	Above Ceiling	Assumed	Yes	M	1,500

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 3/12/2024 + 8/6/2025	**Site: Kyrene Centennial Middle School - Building H**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
Inspection Date: 3/11/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)						
1	Orange Peel Drywall - Multicolored Paint Layers	Throughout Building	No	No	M	80,000
	White Texture		No	No	M	
	White Drywall with Brown Paper		No	No	M	
2	Tac Board	Classrooms	No	No	M	1500
3	White 12" x 12" VCT	Storage Rooms	No	No	M	650
4	Transparent Mastic for White 12" x 12" VCT		No	No	M	
Inspection Date:8/6/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)						
5	New 2' x 2' Ceiling Tile	Classrooms	No	Yes	M	20,000
6	Old 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	30000
7	Gray Muli-Color Carpet Square	Classrooms	No	No	M	20000
8	Mastic for Gray Muli-Color Carpet Square		No	No	M	
9	Blue Cove Base	Throughout Building	No	No	M	750
10	Cream Mastic for Blue Cove Base		No	No	M	
11	Orange Peel Drywall - White Paint	Throughout Building	No	No	M	80,000
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Assumed Material						
12	**Black Entry Carpet**	**Building Entrances**	**Assumed**	**No**	**M**	**250**
13	**Mastic for Black Entry Carpet**		**Assumed**	**No**	**M**	
14	**Interior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**150**
15	**Exterior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**150**
16	**Black Sink Coating**	**Classrooms**	**Assumed**	**No**	**M**	**100**
17	**Tackboard**	**Throughout Building**	**Assumed**	**No**	**M**	**15,000**
18	**Mastic for Tackboard**		**Assumed**	**No**	**M**	
19	**White Sink Coating**	**Room H-11**	**Assumed**	**No**	**M**	**5**
20	**Fume Hood Panel**	**Room H-11 and H-6**	**Assumed**	**No**	**M**	**50**

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 3/12/2024 + 8/6/2025	Site: Kyrene Centennial Middle School - Building H

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
21	Tan Speckled 12" x 12" VCT	Storage and Janitors Closet	Assumed	No	M	500
22	Mastic for Tan Speckled 12" x 12" VCT		Assumed	No	M	
23	Gray Cove Base	Storages, H-8 Office, and Workroom Restroom	Assumed	No	M	250
24	Mastic for Gray Cove Base		Assumed	No	M	
25	FRP	Janitors Closet and H-9 Restroom	Assumed	No	M	300
26	Mastic for FRP		Assumed	No	M	
27	Smooth Drywall	Janitors Closet	Assumed	No	M	2,500
28	White w. Gray Specks 12" x 12" VCT	Room H-9, H-6, H-8, and Storages	Assumed	No	M	3,000
29	Mastic for White w. Gray Specks 12" x 12" VCT		Assumed	No	M	
30	Divider Wall	Rooms H-7, H-8, and H-9	Assumed	No	M	3,000
31	Block	Throughout Building	Assumed	No	M	75,000
32	Mortar for Block		Assumed	No	M	
33	Brick	Throughout Building	Assumed	No	M	75,000
34	Mortar for Brick		Assumed	No	M	
35	Off-White 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	4,000
36	Mastic for Off-White 4" x 4" Ceramic Wall Tile		Assumed	No	M	
37	Grout for Off-White 4" x 4" Ceramic Wall Tile		Assumed	No	M	
38	Peach 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	500
39	Mastic for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
40	Grout for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
41	Gray 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	500
42	Mastic for Gray 4" x 4" Ceramic Wall Tile		Assumed	No	M	
43	Grout for Gray 4" x 4" Ceramic Wall Tile		Assumed	No	M	
44	Off-White 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	3,000
45	Grout for Off-White 2" x 2" Ceramic Floor Tile		Assumed	No	M	
46	Thinset for Off-White 2" x 2" Ceramic Floor Tile		Assumed	No	M	

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 3/12/2024 + 8/6/2025	Site: Kyrene Centennial Middle School - Building H

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
47	Green Speckled 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	500
48	Grout for 2" x 2" Ceramic Floor Tile		Assumed	No	M	
49	Thinset for 2" x 2" Ceramic Floor Tile		Assumed	No	M	
50	Gray Speckled 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	500
51	Grout for 2" x 2" Ceramic Floor Tile		Assumed	No	M	
52	Thinset for 2" x 2" Ceramic Floor Tile		Assumed	No	M	
53	Fixture Caulking	Restrooms	Assumed	No	M	100
54	Glass Block Mortar	Building Entrances	Assumed	No	M	200
55	Knockdown Drywall	Electrical	Assumed	No	M	2,000
56	Large Pipe Wrap	Above Ceiling	Assumed	No	M	5,000
57	Mastic for Large Pipe Wrap		Assumed	No	M	
58	Small Pipe Wrap	Above Ceiling	Assumed	No	M	4,000
59	Mastic for Pipe Wrap		Assumed	No	M	
60	Black Pipe Foam Insulation	Above Ceiling	Assumed	No	M	1,000
61	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	5,000
62	Silver Duct Wrap	Above Ceiling	Assumed	No	M	4,000
63	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	3,000
64	White Duct Tape	Above Ceiling	Assumed	No	M	500
65	Mastic for Duct Tape	Above Ceiling	Assumed	No	M	
66	Unfinished Drywall	Above Ceiling	Assumed	No	M	20,000
67	Silver Duct Tape	Above Ceiling	Assumed	No	M	100
68	Skylight Insulation Panel	Above Ceiling	Assumed	Yes	M	2,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

SECTION 6

♦

PLM BULK
SAMPLE SHEETS

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/4/2025	Site: Kyrene Centennial Middle School - Admin Building

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: - 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)					
AZ1418.11-PLM-1	1	Skip Trowel Drywall System - Peach Paint #1	East - Custodian	Convenient	None Detected
		White Texture #1		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound #1		Convenient	None Detected
		Peach Paint #2		Convenient	None Detected
		White Joint Compound #2		Convenient	None Detected
		Yellow Tape (Mesh)		Convenient	None Detected
		Peach Paint #3		Convenient	None Detected
		White Texture #2		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.11-PLM-2		Skip Trowel Drywall System - Peach Paint #2	East - Custodian	Convenient	None Detected
		White Texture #2		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound #2		Convenient	None Detected
		Peach Paint #3		Convenient	None Detected
		White Joint Compound #3		Convenient	None Detected
		Yellow Tape (Mesh)		Convenient	None Detected
		Peach Paint #4		Convenient	None Detected
		White Texture #3		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.11-PLM-3	1	Skip Trowel Drywall System - Peach Paint #3	East - Custodian	Convenient	None Detected
		White Texture #3		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound #3		Convenient	None Detected
		Peach Paint #4		Convenient	None Detected
		White Joint Compound #4		Convenient	None Detected
		Yellow Tape (Mesh)		Convenient	None Detected
		Peach Paint #5		Convenient	None Detected
		White Texture #4		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/4/2025	Site: Kyrene Centennial Middle School - Admin Building

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.11-PLM-4	2	White w/Gray Specks 12" x 12"' VCT	Northeast - Custodian	Convenient	None Detected
	3	Semi-Transparent Mastic for 12" x 12" VCT		Convenient	None Detected
AZ1418.11-PLM-5	2	White w/Gray Specks 12" x 12"' VCT	Northeast - Custodian	Convenient	None Detected
	3	Semi-Transparent Mastic for 12" x 12" VCT		Convenient	None Detected
AZ1418.11-PLM-6	2	White w/Gray Specks 12" x 12"' VCT	Northeast - Custodian	Convenient	None Detected
	3	Semi-Transparent Mastic for 12" x 12" VCT		Convenient	None Detected
Sample Date: 8/4/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)					
AZ1418.56-PLM-1	4	New 2' x 2' Ceiling Tile	South - Front Office	Random	None Detected
AZ1418.56-PLM-2		New 2' x 2' Ceiling Tile	Northwest - Health Office	Random	None Detected
AZ1418.56-PLM-3		New 2' x 2' Ceiling Tile	East - ISI Room	Random	None Detected
AZ1418.56-PLM-4	5	Old 2' x 2' Ceiling Tile	South- Front Office	Random	None Detected
AZ1418.56-PLM-5		Old 2' x 2' Ceiling Tile	Northwest - Health Office	Random	None Detected
AZ1418.56-PLM-6		Old 2' x 2' Ceiling Tile	East - ISI Room	Random	None Detected
AZ1418.56-PLM-7	6	Gray Multi-Color Carpet Square	Southwest - Front Office	Convenient	None Detected
	7	Tan Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-8	6	Gray Multi-Color Carpet Square	East - ISI Room	Convenient	None Detected
	7	Tan Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-9	6	Gray Multi-Color Carpet Square	West - Office	Convenient	None Detected
	7	Tan Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-10	8	Blue Cove Base	Southeast - Front Office	Convenient	None Detected
	9	Cream Mastic Blue Cove Base		Convenient	None Detected
AZ1418.56-PLM-11	8	Blue Cove Base	West - Office	Convenient	None Detected
	9	Cream Mastic Blue Cove Base		Convenient	None Detected
AZ1418.56-PLM-12	8	Blue Cove Base	North - Office	Convenient	None Detected
	9	Cream Mastic Blue Cove Base		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/4/2025	Site: Kyrene Centennial Middle School - Admin Building

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-13	10	Orange Beige Paint	Southeast - Front Office Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-14		Orange Beige Paint	East - Office Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-15		Orange Beige Paint	West - Mail Office	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/5/2025	Site: Kyrene Centennial Middle School - Building B

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)					
AZ1418.11-PLM-1	1	Tan Ceramic Tile	East - Girls Restroom	Convenient	None Detected
	2	Cream Mastic for Tile		Convenient	None Detected
	3	Gray Grout for Tile		Convenient	None Detected
	4	Gray Mortar for Tile		Convenient	None Detected
AZ1418.11-PLM-2	1	Tan Ceramic Tile	East - Girls Restroom	Convenient	None Detected
	2	Cream Mastic for Tile		Convenient	None Detected
	3	Gray Grout for Tile		Convenient	None Detected
	4	Gray Mortar for Tile		Convenient	None Detected
AZ1418.11-PLM-3	1	Tan Ceramic Tile	North - Boys Restroom	Convenient	None Detected
	2	Cream Mastic for Tile		Convenient	None Detected
	3	Gray Grout for Tile		Convenient	None Detected
	4	Gray Mortar for Tile		Convenient	None Detected
AZ1418.11-PLM-4	5	White Ceramic Tile ND	East - Girls Restroom	Convenient	None Detected
	6	Gray Grout ND		Convenient	None Detected
	7	Tan Mastic		Convenient	None Detected
AZ1418.11-PLM-5	5	White Ceramic Tile ND	North - Boys Restroom	Convenient	None Detected
	6	Gray Grout ND		Convenient	None Detected
	7	Gray Caulk ND		Convenient	None Detected
	8	Tan Mastic		Convenient	None Detected
AZ1418.11-PLM-6	5	White Ceramic Tile ND	East - Boys Restroom	Convenient	None Detected
	6	Gray Grout ND		Convenient	None Detected
	7	Tan Mastic		Convenient	None Detected
Sample Date: 8/5/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)					
AZ1418.56-PLM-1	9	New 2' x 2' Ceiling Tile	East - Room B-2	Convenient	None Detected
AZ1418.56-PLM-2		New 2' x 2' Ceiling Tile	Northwest - Room B-6	Convenient	None Detected
AZ1418.56-PLM-3		New 2' x 2' Ceiling Tile	East - Room B-11	Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/5/2025	Site: Kyrene Centennial Middle School - Building B

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-4	10	Old 2' x 2' Ceiling Tile	Northeast - Room B-9	Convenient	None Detected
AZ1418.56-PLM-5		Old 2' x 2' Ceiling Tile	East - Room B-13	Convenient	None Detected
AZ1418.56-PLM-6		Old 2' x 2' Ceiling Tile	Northwest - B-3	Convenient	None Detected
AZ1418.56-PLM-7	11	Gray Multi-Color Carpet Square	West - Room B-1	Convenient	None Detected
	12	Yellow Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-8	11	Gray Multi-Color Carpet Square	Northeast - B-9	Convenient	None Detected
	12	Yellow Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-9	11	Gray Multi-Color Carpet Square	East - B-12	Convenient	None Detected
	12	Yellow Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-10	13	Blue Cove Base	West - B-10	Convenient	None Detected
	14	Yellow Mastic for Cove Base		Convenient	None Detected
AZ1418.56-PLM-11	13	Blue Cove Base	North - Room B-5	Convenient	None Detected
	14	Yellow Mastic for Cove Base		Convenient	None Detected
AZ1418.56-PLM-12	13	Blue Cove Base	East - Room B-4	Convenient	None Detected
	14	Yellow Mastic for Cove Base		Convenient	None Detected
AZ1418.56-PLM-13	15	Orange Peel Drywall System - Off-White Paint	East - Workroom	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-14		Orange Peel Drywall System - Off-White Paint	West - Workroom	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-15		Orange Peel Drywall System - Off-White Paint	Northeast - Room B-7	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/5/2025	Site: Kyrene Centennial Middle School - Building C

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)					
AZ1418.11-PLM-1	1	White Ceramic Tile	East - Boys Restroom	Convenient	None Detected
	2	Gray Grout for Tile		Convenient	None Detected
	3	Tan Mastic for Tile		Convenient	None Detected
AZ1418.11-PLM-2	1	White Ceramic Tile	East - Boys Restroom	Convenient	None Detected
	2	Gray Grout for Tile		Convenient	None Detected
	3	Tan Mastic for Tile		Convenient	None Detected
AZ1418.11-PLM-3	1	White Ceramic Tile	Southeast - Girls Restroom	Convenient	None Detected
	2	Gray Grout for Tile		Convenient	None Detected
	3	Tan Mastic for Tile		Convenient	None Detected
Sample Date: 8/5/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)					
AZ1418.56-PLM-1	4	New 2' x 2' Ceiling Tile	West - Room C-1	Random	None Detected
AZ1418.56-PLM-2		New 2' x 2' Ceiling Tile	West - Conference Room	Random	None Detected
AZ1418.56-PLM-3		New 2' x 2' Ceiling Tile	East - Room C-10	Random	None Detected
AZ1418.56-PLM-4	5	Old 2' x 2' Ceiling Tile	East - Room C-11	Random	None Detected
AZ1418.56-PLM-5		Old 2' x 2' Ceiling Tile	Northeast - Room C-8	Random	None Detected
AZ1418.56-PLM-6		Old 2' x 2' Ceiling Tile	North - South C-5	Random	None Detected
AZ1418.56-PLM-7	6	Gray Multi-Color Carpet Square	West - Conference Room	Convenient	None Detected
	7	Tan Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-8	6	Gray Multi-Color Carpet Square	Northwest - C-2	Convenient	None Detected
	7	Tan Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-9	6	Gray Multi-Color Carpet Square	Southeast - C-4	Convenient	None Detected
	7	Tan Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-10	8	Blue Cove Base	Southwest - C-5	Convenient	None Detected
	9	Cream Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.56-PLM-11	8	Blue Cove Base	Southeast - Room C-11	Convenient	None Detected
	9	Cream Mastic for Blue Cove Base		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/5/2025	Site: Kyrene Centennial Middle School - Building C

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-12	8	Blue Cove Base	East - Room C-9	Convenient	None Detected
	9	Cream Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.56-PLM-13	10	Orange Peel Drywall - Cream Paint	West - Room C-4 Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Cream Tape 2		Convenient	None Detected
		White Joint Compound 2		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-14		Orange Peel Drywall - Cream Paint	South - Room C-8 Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Cream Tape 3		Convenient	None Detected
		White Joint Compound 3		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-15		Orange Peel Drywall - Cream Paint	East - Room C-10 Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Cream Tape 4		Convenient	None Detected
		White Joint Compound 4		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 7/11/22 + 3/12/24 + 8/5/25	Site: Kyrene Centennial Middle School - Building D

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 7/11/2022 - AHERA Building Inspector: Nick Marcos (ON-4644-8873-032422)					
AZ0959.3105-PLM-1	1	Orange Peel Drywall - Off-White Paint #1	West - Faculty Restroom	Convenient	None Detected
		White Texture #1		Convenient	None Detected
		Off-White Paint #2		Convenient	None Detected
		White Texture #2		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Brown Drywall with Brown/Green Paper		Convenient	None Detected
AZ0959.3105-PLM-2		Orange Peel Drywall - Off-White Paint #2	Northwest - Faculty Restroom	Convenient	None Detected
		White Texture #2		Convenient	None Detected
		Off-White Paint #3		Convenient	None Detected
		White Texture #3		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Brown Drywall with Brown/Green Paper		Convenient	None Detected
AZ0959.3105-PLM-3		Orange Peel Drywall - Off-White Paint #3	West - Faculty Restroom	Convenient	None Detected
		White Texture #3		Convenient	None Detected
		Off-White Paint #4		Convenient	None Detected
		White Texture #4		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Brown Drywall with Brown/Green Paper		Convenient	None Detected
AZ0959.3105-PLM-4	2	Brown Cove Base	West - Faculty Restroom	Convenient	None Detected
	3	Yellow Mastic for Brown Cove Base		Convenient	None Detected
AZ0959.3105-PLM-5	2	Brown Cove Base	Northwest - Faculty Restroom	Convenient	None Detected
	3	Yellow Mastic for Brown Cove Base		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 7/11/22 + 3/12/24 + 8/5/25	Site: Kyrene Centennial Middle School - Building D

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ0959.3105-PLM-6	2	Brown Cove Base	Northwest - Faculty Restroom	Convenient	None Detected
	3	Yellow Mastic for Brown Cove Base		Convenient	None Detected
AZ0959.3105-PLM-7	4	Blue Cove Base	South - Faculty Restroom	Convenient	None Detected
	5	Yellow Mastic for Blue Cove Base		Convenient	None Detected
AZ0959.3105-PLM-8	4	Blue Cove Base	South - Faculty Restroom	Convenient	None Detected
	5	Yellow Mastic for Blue Cove Base		Convenient	None Detected
AZ0959.3105-PLM-9	4	Blue Cove Base	South - Faculty Restroom	Convenient	None Detected
	5	Yellow Mastic for Blue Cove Base		Convenient	None Detected
AZ0959.3105-PLM-10	6	Counter Caulking	Southwest - Faculty Restroom	Convenient	None Detected
AZ0959.3105-PLM-11		Counter Caulking	Southwest - Faculty Restroom	Convenient	None Detected
AZ0959.3105-PLM-12		Counter Caulking	Southwest - Faculty Restroom	Convenient	None Detected
AZ0959.3105-PLM-13	7	Fixture Caulking	West - Faculty Restroom	Convenient	None Detected
AZ0959.3105-PLM-14		Fixture Caulking	West - Faculty Restroom	Convenient	None Detected
AZ0959.3105-PLM-15		Fixture Caulking	West - Faculty Restroom	Convenient	None Detected
Sample Date: 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)					
AZ1418.11-PLM-1	8	White Ceramic Tile	Northeast - Girls Restroom	Convenient	None Detected
	9	Gray Grout for Tile		Convenient	None Detected
	10	Tan Mastic for Tile		Convenient	None Detected
AZ1418.11-PLM-2	8	White Ceramic Tile	Northeast - Girls Restroom	Convenient	None Detected
	9	Gray Grout for Tile		Convenient	None Detected
	10	Tan Mastic for Tile		Convenient	None Detected
AZ1418.11-PLM-3	8	White Ceramic Tile	West - Girls Restroom	Convenient	None Detected
	9	Gray Grout for Tile		Convenient	None Detected
	10	Tan Mastic for Tile		Convenient	None Detected
AZ1418.11-PLM-4	11	2" x 2" Tan Floor Tiles	Southeast - Boys Restroom	Convenient	None Detected
	12	Gray Grout for Tile		Convenient	None Detected
	13	Yellow Mastic for Tile		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 7/11/22 + 3/12/24 + 8/5/25	Site: Kyrene Centennial Middle School - Building D

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.11-PLM-5	11	2" x 2" Tan Floor Tiles	West - Boys Restroom	Convenient	None Detected
	12	Gray Grout for Tile		Convenient	None Detected
	13	Yellow Mastic for Tile		Convenient	None Detected
AZ1418.11-PLM-6	11	2" x 2" Tan Floor Tiles	West - Boys Restroom	Convenient	None Detected
	12	Gray Grout for Tile		Convenient	None Detected
	13	Yellow Mastic for Tile		Convenient	None Detected
AZ1418.11-PLM-7	14	2" x 2" Pink Floor Tile	Southeast - Boys Restroom	Convenient	None Detected
	15	Gray Grout for Tile		Convenient	None Detected
	16	Beige Thinset for Tile		Convenient	None Detected
AZ1418.11-PLM-8	14	2" x 2" Pink Floor Tile	West - Boys Restroom	Convenient	None Detected
	15	Gray Grout for Tile		Convenient	None Detected
	16	Beige Thinset for Tile		Convenient	None Detected
AZ1418.11-PLM-9	14	2" x 2" Pink Floor Tile	West - Boys Restroom	Convenient	None Detected
	15	Gray Grout for Tile		Convenient	None Detected
	16	Beige Thinset for Tile		Convenient	None Detected
AZ1418.11-PLM-10	17	2" x 2" Green Floor Tile	West - Boys Restroom	Convenient	None Detected
	18	Gray Grout for Tile		Convenient	None Detected
	19	Beige Thinset for Tile		Convenient	None Detected
AZ1418.11-PLM-11	17	2" x 2" Green Floor Tile	Southeast - Boys Restroom	Convenient	None Detected
	18	Gray Grout for Tile		Convenient	None Detected
	19	Beige Thinset for Tile		Convenient	None Detected
AZ1418.11-PLM-12	17	2" x 2" Green Floor Tile	West - Boys Restroom	Convenient	None Detected
	18	Gray Grout for Tile		Convenient	None Detected
	19	Beige Thinset for Tile		Convenient	None Detected
Sample Date: 8/5/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)					
AZ1418.56-PLM-1	20	New 2' x 2' Ceiling Tile	East - Room D-1	Random	None Detected
AZ1418.56-PLM-2		New 2' x 2' Ceiling Tile	East - Room D-5	Random	None Detected
AZ1418.56-PLM-3		New 2' x 2' Ceiling Tile	East - Room D-8	Random	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 7/11/22 + 3/12/24 + 8/5/25	Site: Kyrene Centennial Middle School - Building D

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-4	21	Old 2' x 2' Ceiling Tile	East - Room D-11	Random	None Detected
AZ1418.56-PLM-5		Old 2' x 2' Ceiling Tile	East - Room D-4	Random	None Detected
AZ1418.56-PLM-6		Old 2' x 2' Ceiling Tile	East - Room D-2	Random	None Detected
AZ1418.56-PLM-7	22	Gray Multicolored Carpet Square	West - Teachers Lounge	Convenient	None Detected
	23	Multicolored Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-8	22	Gray Multicolored Carpet Square	East - Room D-12	Convenient	None Detected
	23	Multicolored Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-9	22	Gray Multicolored Carpet Square	North - Room D-9	Convenient	None Detected
	23	Multicolored Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-10	24	Blue Cove Base	Southeast - Room D-10	Convenient	None Detected
	25	Cream Mastic for Cove Base		Convenient	None Detected
AZ1418.56-PLM-11	24	Blue Cove Base	Southeast - Room D-5	Convenient	None Detected
	25	Cream Mastic for Cove Base		Convenient	None Detected
AZ1418.56-PLM-12	24	Blue Cove Base	Southwest - Room D-3	Convenient	None Detected
	25	Cream Mastic for Cove Base		Convenient	None Detected
AZ1418.56-PLM-13	26	Orange Peel Drywall - Off-White Paint	Southeast - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-14		Orange Peel Drywall - Off-White Paint	Southwest - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-15		Orange Peel Drywall - Off-White Paint	West - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025 + 8/28/2025	Site: Kyrene Centennial Middle School - Building E

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 9/29/2021 - AHERA Building Inspector: Garth Backman (ON-4644-12304-071621)					
AZ0959.2917-PLM-1	1	Drywall - Beige Paint	Northwest - Kitchen	Convenient	None Detected
		White Texture		Convenient	None Detected
		Off-White Paint		Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ0959.2917-PLM-2		Drywall - Beige Paint	Northwest - Kitchen	Convenient	None Detected
		White Texture		Convenient	None Detected
		Off-White Paint		Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ0959.2917-PLM-3		Drywall - Beige Paint	West - Kitchen	Convenient	None Detected
		White Texture		Convenient	None Detected
		Off-White Paint		Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
Sample Date: 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)					
AZ1418.11-PLM-1	2	Red 12" x 12" VCT	East - Service Line Area	Convenient	None Detected
	3	Mastic for Red 12" x 12" VCT		Convenient	None Detected
AZ1418.11-PLM-2	2	Red 12" x 12" VCT	East - Service Line Area	Convenient	None Detected
	3	Mastic for Red 12" x 12" VCT		Convenient	None Detected
AZ1418.11-PLM-3	2	Red 12" x 12" VCT	East - Service Line Area	Convenient	None Detected
	3	Mastic for Red 12" x 12" VCT		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025 + 8/28/2025	Site: Kyrene Centennial Middle School - Building E

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.11-PLM-4	4	Brown Stair Tread	West - Stage	Convenient	None Detected
	5	Cream Mastic for Brown Stair Tread		Convenient	None Detected
AZ1418.11-PLM-5	4	Brown Stair Tread	West - Stage	Convenient	None Detected
	5	Cream Mastic for Brown Stair Tread		Convenient	None Detected
AZ1418.11-PLM-6	4	Brown Stair Tread	West - Stage	Convenient	None Detected
	5	Cream Mastic for Brown Stair Tread		Convenient	None Detected
AZ1418.11-PLM-7	6	White RR Wall Tiles	Southwest - Boys Restroom	Convenient	None Detected
	7	Grout for White RR Wall Tiles		Convenient	None Detected
AZ1418.11-PLM-8	6	White RR Wall Tiles	West - Restroom	Convenient	None Detected
	7	Grout for White RR Wall Tiles		Convenient	None Detected
AZ1418.11-PLM-9	6	White RR Wall Tiles	West - Restroom	Convenient	None Detected
	7	Grout for White RR Wall Tiles		Convenient	None Detected
AZ1418.11-PLM-10	8	White 2" x 2" Floor Tiles	West - Restroom	Convenient	None Detected
	9	Dark Gray Grout for Tile		Convenient	None Detected
	10	Dark Gray Thinset for Tile		Convenient	None Detected
AZ1418.11-PLM-11	8	White 2" x 2" Floor Tiles	Southwest - Boys Restroom	Convenient	None Detected
	9	Dark Gray Grout for Tile		Convenient	None Detected
	10	Dark Gray Thinset for Tile		Convenient	None Detected
AZ1418.11-PLM-12	8	White 2" x 2" Floor Tiles	Southwest - Boys Restroom	Convenient	None Detected
	9	Dark Gray Grout for Tile		Convenient	None Detected
	10	Dark Gray Thinset for Tile		Convenient	None Detected
Sample Date: 8/6/2025 & 8/22/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)					
AZ1418.56-PLM-1	11	New 2" x 2" Ceiling Tile	South - Band Room	Random	None Detected
AZ1418.56-PLM-2		New 2" x 2" Ceiling Tile	Southwest - Storage	Random	None Detected
AZ1418.56-PLM-3		New 2" x 2" Ceiling Tile	Southeast - Cafeteria	Random	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025 + 8/28/2025	Site: Kyrene Centennial Middle School - Building E

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-4	12	Old 2" x 2" Ceiling Tile	Northeast - Cafeteria	Random	None Detected
AZ1418.56-PLM-5		Old 2" x 2" Ceiling Tile	North - Band Room	Random	None Detected
AZ1418.56-PLM-6		Old 2" x 2" Ceiling Tile	Southwest - Cafeteria	Random	None Detected
AZ1418.56-PLM-7	13	Peach Soundboard Wrap	Northwest - Band Room	Convenient	None Detected
	14	Yellow Adhesive for Wrap		Convenient	None Detected
AZ1418.56-PLM-8	13	Peach Soundboard Wrap	Northeast - Band Room	Convenient	None Detected
	14	Yellow Adhesive for Wrap		Convenient	None Detected
AZ1418.56-PLM-9	13	Peach Soundboard Wrap	South - Band Room	Convenient	None Detected
	14	Yellow Adhesive for Wrap		Convenient	None Detected
AZ1418.56-PLM-10	15	Gray Multicolored Carpet Square	Northwest - Storage	Convenient	None Detected
	16	Multicolored Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-11	15	Gray Multicolored Carpet Square	Southwest - Stage Storage	Convenient	None Detected
	16	Multicolored Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-12	15	Gray Multicolored Carpet Square	East - Kitchen Storage	Convenient	None Detected
	16	Multicolored Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-13	17	Orange Peel Drywall - Off-White Paint	West - Boys Locker	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-14		Orange Peel Drywall - Off-White Paint	Northeast - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Yellow Paint		Convenient	None Detected
		White Texture 2		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025 + 8/28/2025	Site: Kyrene Centennial Middle School - Building E

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-15	17	Orange Peel Drywall - Off-White Paint	Southwest - Weight Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Off-White Paint 2		Convenient	None Detected
		White Texture 2		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-16	18	2' x 4' Ceiling Tile	Southeast - Apartment Unit	Convenient	None Detected
AZ1418.56-PLM-17		2' x 4' Ceiling Tile	West - Apartment Unit	Convenient	None Detected
AZ1418.56-PLM-18		2' x 4' Ceiling Tile	North - Apartment Unit	Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 8/4/2025	Site: Kyrene Centennial Middle School - Building F

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 8/4/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)					
AZ1418.56-PLM-1	1	New 2' x 2' Ceiling Tile	South - Chorus Room	Random	None Detected
AZ1418.56-PLM-2		New 2' x 2' Ceiling Tile	West - Room F-3	Random	None Detected
AZ1418.56-PLM-3		New 2' x 2' Ceiling Tile	Northwest - Room F-6	Random	None Detected
AZ1418.56-PLM-4	2	Old 2' x 2' Ceiling Tile	Southeast - Room F-5	Random	None Detected
AZ1418.56-PLM-5		Old 2' x 2' Ceiling Tile	East - Room F-4	Random	None Detected
AZ1418.56-PLM-6		Old 2' x 2' Ceiling Tile	East - Room F-1	Random	None Detected
AZ1418.56-PLM-7	3	Lightly Textured 2' x 2' Ceiling Tile	East - Room F-2	Random	None Detected
AZ1418.56-PLM-8		Lightly Textured 2' x 2' Ceiling Tile	East - Room F-2	Random	None Detected
AZ1418.56-PLM-9		Lightly Textured 2' x 2' Ceiling Tile	East - Room F-2	Random	None Detected
AZ1418.56-PLM-10	4	Gray Multicolor Carpet Square	Southwest - Room F-1	Convenient	None Detected
	5	Mastic for Gray Multicolor Carpet Square		Convenient	None Detected
AZ1418.56-PLM-11	4	Gray Multicolor Carpet Square	Northwest - Room F-4	Convenient	None Detected
	5	Mastic for Gray Multicolor Carpet Square		Convenient	None Detected
AZ1418.56-PLM-12	4	Gray Multicolor Carpet Square	North - Room F-6	Convenient	None Detected
	5	Mastic for Gray Multicolor Carpet Square		Convenient	None Detected
AZ1418.56-PLM-13	6	Orange Peel Drywall - White Paint	Southeast - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-14		Orange Peel Drywall - White Paint	East - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 8/4/2025	Site: Kyrene Centennial Middle School - Building F

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-15	6	Orange Peel Drywall - White Paint	East - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 8/4/2025	Site: Kyrene Centennial Middle School - Building G

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 8/4/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)					
AZ1418.56-PLM-1	1	Lightly Textured 2' x 2' Ceiling Tile	West - Media Center	Random	None Detected
AZ1418.56-PLM-2		Lightly Textured 2' x 2' Ceiling Tile	South - Media Center	Random	None Detected
AZ1418.56-PLM-3		Lightly Textured 2' x 2' Ceiling Tile	East - Media Center	Random	None Detected
AZ1418.56-PLM-4	2	New 2' x 2' Ceiling Tile	Southwest - Room G-6	Random	None Detected
AZ1418.56-PLM-5		New 2' x 2' Ceiling Tile	West - Room G-5	Random	None Detected
AZ1418.56-PLM-6		New 2' x 2' Ceiling Tile	North - Room G-2	Random	None Detected
AZ1418.56-PLM-7	3	Old 2' x 2' Ceiling Tile	South - Room G-4	Random	None Detected
AZ1418.56-PLM-8		Old 2' x 2' Ceiling Tile	South - Room G-2	Random	None Detected
AZ1418.56-PLM-9		Old 2' x 2' Ceiling Tile	North - Storage	Random	None Detected
AZ1418.56-PLM-10	4	Gray Multi-Color Carpet Square	Southeast - Media Center	Convenient	None Detected
	5	Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-11	4	Gray Multi-Color Carpet Square	Northeast - Storage	Convenient	None Detected
	5	Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-12	4	Gray Multi-Color Carpet Square	Southeast - Room G-4	Convenient	None Detected
	5	Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-13	6	Orange Peel Drywall - Off-White Paint	East - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-14		Orange Peel Drywall - Off-White Paint	East - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 8/4/2025	Site: Kyrene Centennial Middle School - Building G

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-15	6	Orange Peel Drywall - Off-White Paint	Northeast - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/6/2025	Site: Kyrene Centennial Middle School - Building H

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)					
AZ1418.11-PLM-1	1	Orange Peel Drywall - Multicolored Paint Layers	North - Room H-11	Convenient	None Detected
		White Texture		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.11-PLM-2		Orange Peel Drywall - Multicolored Paint Layers	South - Room H-11	Convenient	None Detected
		White Texture		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.11-PLM-3		Orange Peel Drywall - Multicolored Paint Layers	West - Room H-11	Convenient	None Detected
		White Texture		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.11-PLM-3	2	Tac Board	Northeast - Room H-9	Convenient	None Detected
AZ1418.11-PLM-4		Tac Board	Northeast - Room H-9	Convenient	None Detected
AZ1418.11-PLM-5		Tac Board	Northeast - Room H-9	Convenient	None Detected
AZ1418.11-PLM-6	3	White 12" x 12" VCT	Northeast - Storage	Convenient	None Detected
	4	Transparent Mastic for White 12" x 12" VCT		Convenient	None Detected
AZ1418.11-PLM-7	3	White 12" x 12" VCT	Northeast - Storage	Convenient	None Detected
	4	Transparent Mastic for White 12" x 12" VCT		Convenient	None Detected
AZ1418.11-PLM-8	3	White 12" x 12" VCT	North - Storage	Convenient	None Detected
	4	Transparent Mastic for White 12" x 12" VCT		Convenient	None Detected
Sample Date: 8/6/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)					
AZ1418.56-PLM-1	5	New 2' x 2' Ceiling Tile	Southwest - Room H-11	Random	None Detected
AZ1418.56-PLM-2		New 2' x 2' Ceiling Tile	East - Room H-6	Random	None Detected
AZ1418.56-PLM-3		New 2' x 2' Ceiling Tile	North - Room H-16	Random	None Detected
AZ1418.56-PLM-4	6	Old 2' x 2' Ceiling Tile	West - H-11	Random	None Detected
AZ1418.56-PLM-5		Old 2' x 2' Ceiling Tile	Northeast -Room H-10	Random	None Detected
AZ1418.56-PLM-6		Old 2' x 2' Ceiling Tile	Southeast - H-8	Random	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/6/2025	Site: Kyrene Centennial Middle School - Building H

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-7	7	Gray Muli-Color Carpet Square	Northeast - H-3	Convenient	None Detected
	8	Mastic for Gray Muli-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-8	7	Gray Muli-Color Carpet Square	North - Room H-1	Convenient	None Detected
	8	Mastic for Gray Muli-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-9	7	Gray Muli-Color Carpet Square	Northeast - Room H-13	Convenient	None Detected
	8	Mastic for Gray Muli-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-10	9	Blue Cove Base	Northwest - Room H-11	Convenient	None Detected
	10	Cream Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.56-PLM-11	9	Blue Cove Base	Northeast - Room H-17	Convenient	None Detected
	10	Cream Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.56-PLM-12	9	Blue Cove Base	North - Room H-5	Convenient	None Detected
	10	Cream Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.56-PLM-13	11	Orange Peel Drywall - White Paint	Northwest - Office	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-14		Orange Peel Drywall - White Paint	West - H-1 Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-15		Orange Peel Drywall - White Paint	West - H-1 Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected


Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

SECTION 7

♦

PLM BULK SAMPLE LOCATION MAPS

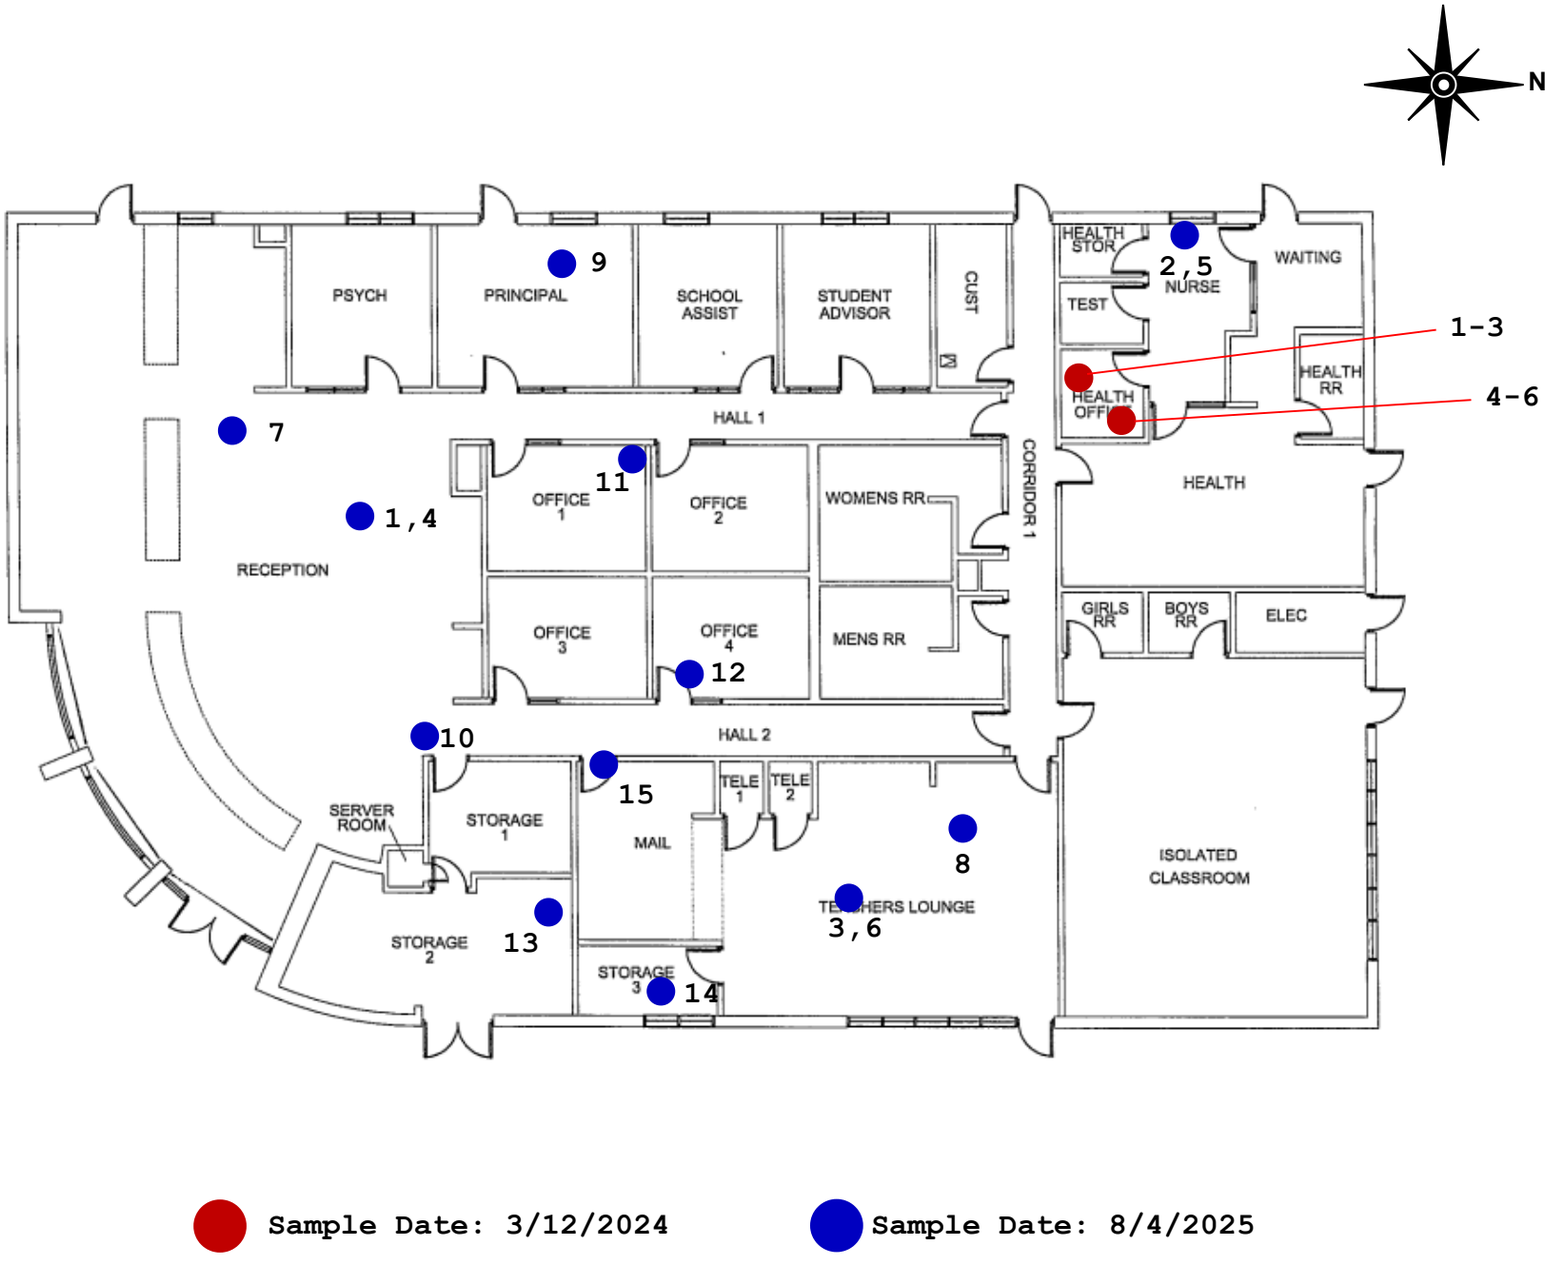


PLM Sample Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Admin Building

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

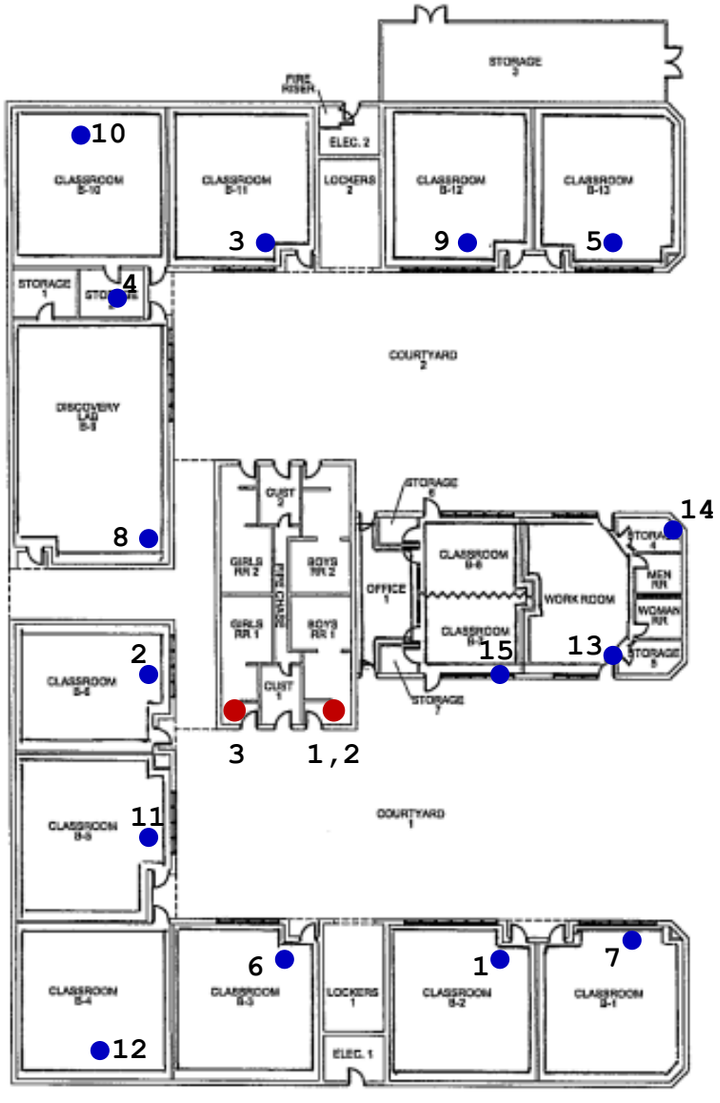


Sample Date: 3/12/2024 **Sample Date: 8/5/2025**

PLM Sample Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building B

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

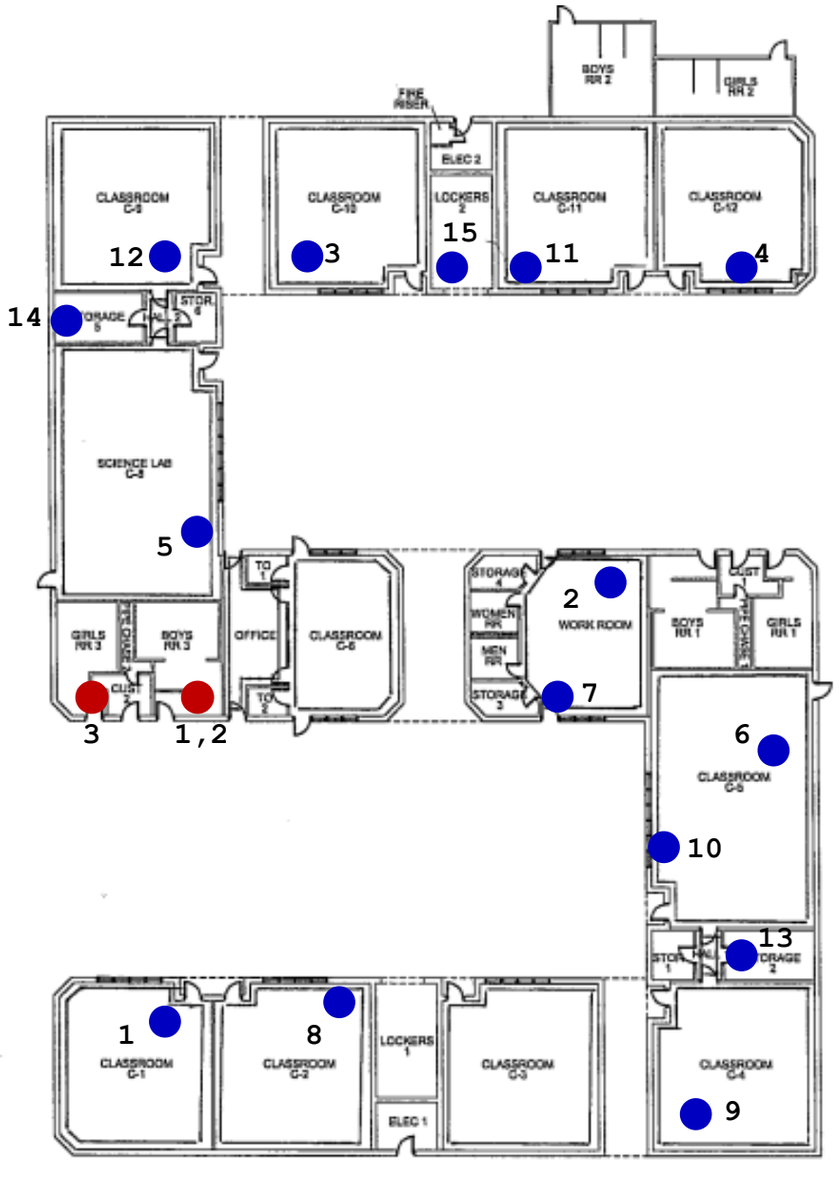

Sample Date: 3/12/2024


Sample Date: 8/5/2025

PLM Sample Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building C

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

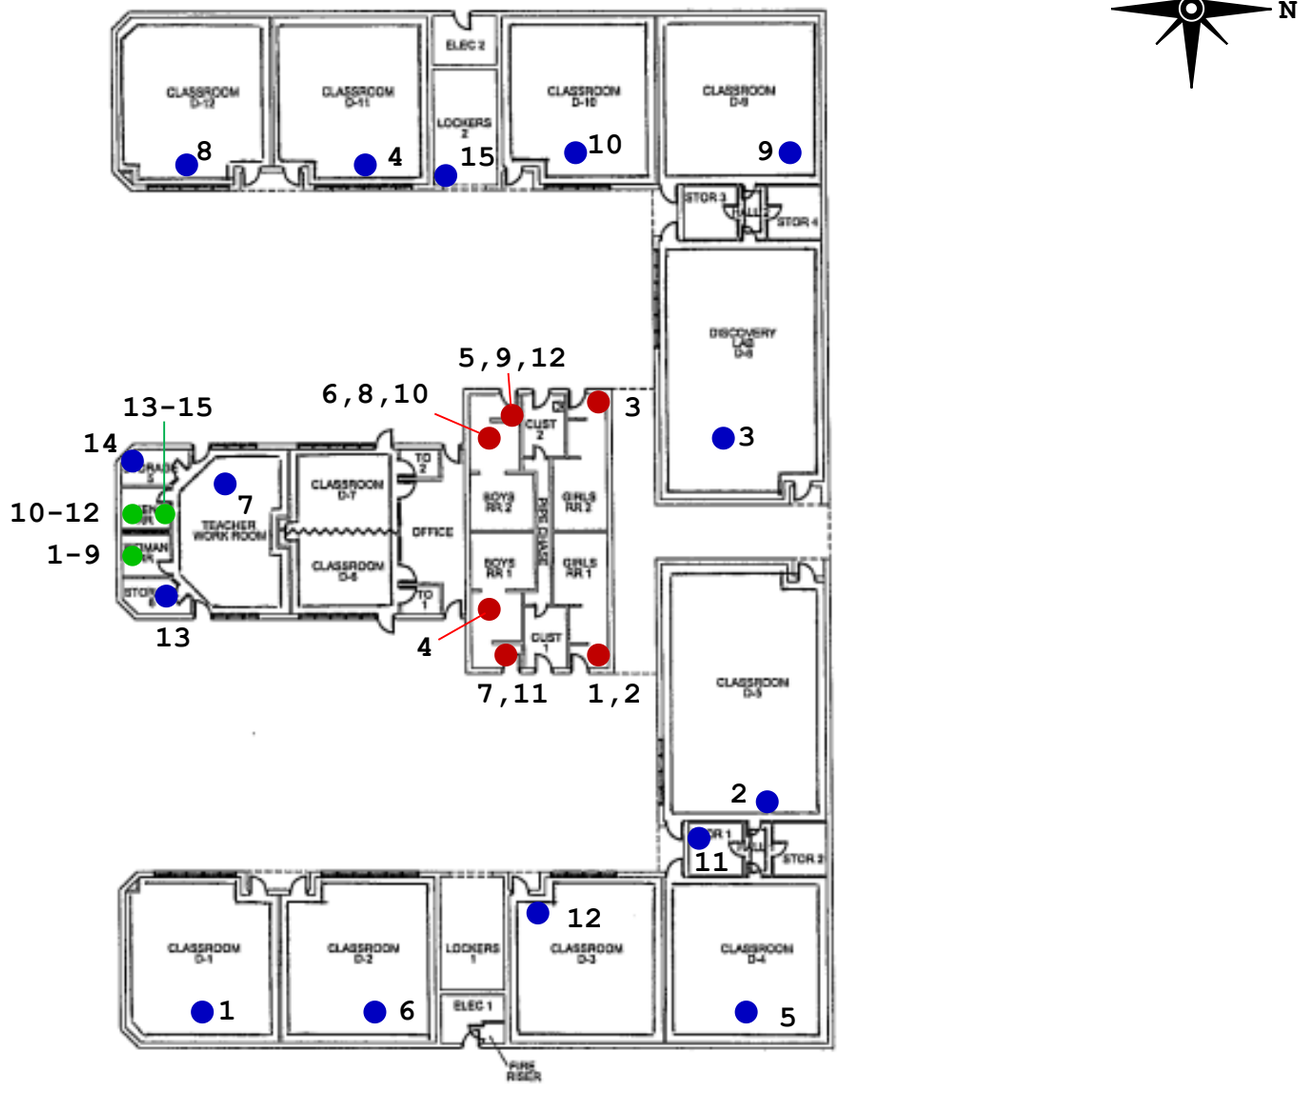


Sample Date: 7/11/22 **Sample Date: 3/12/24** **Sample Date: 8/5/25**

PLM Sample Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building D

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

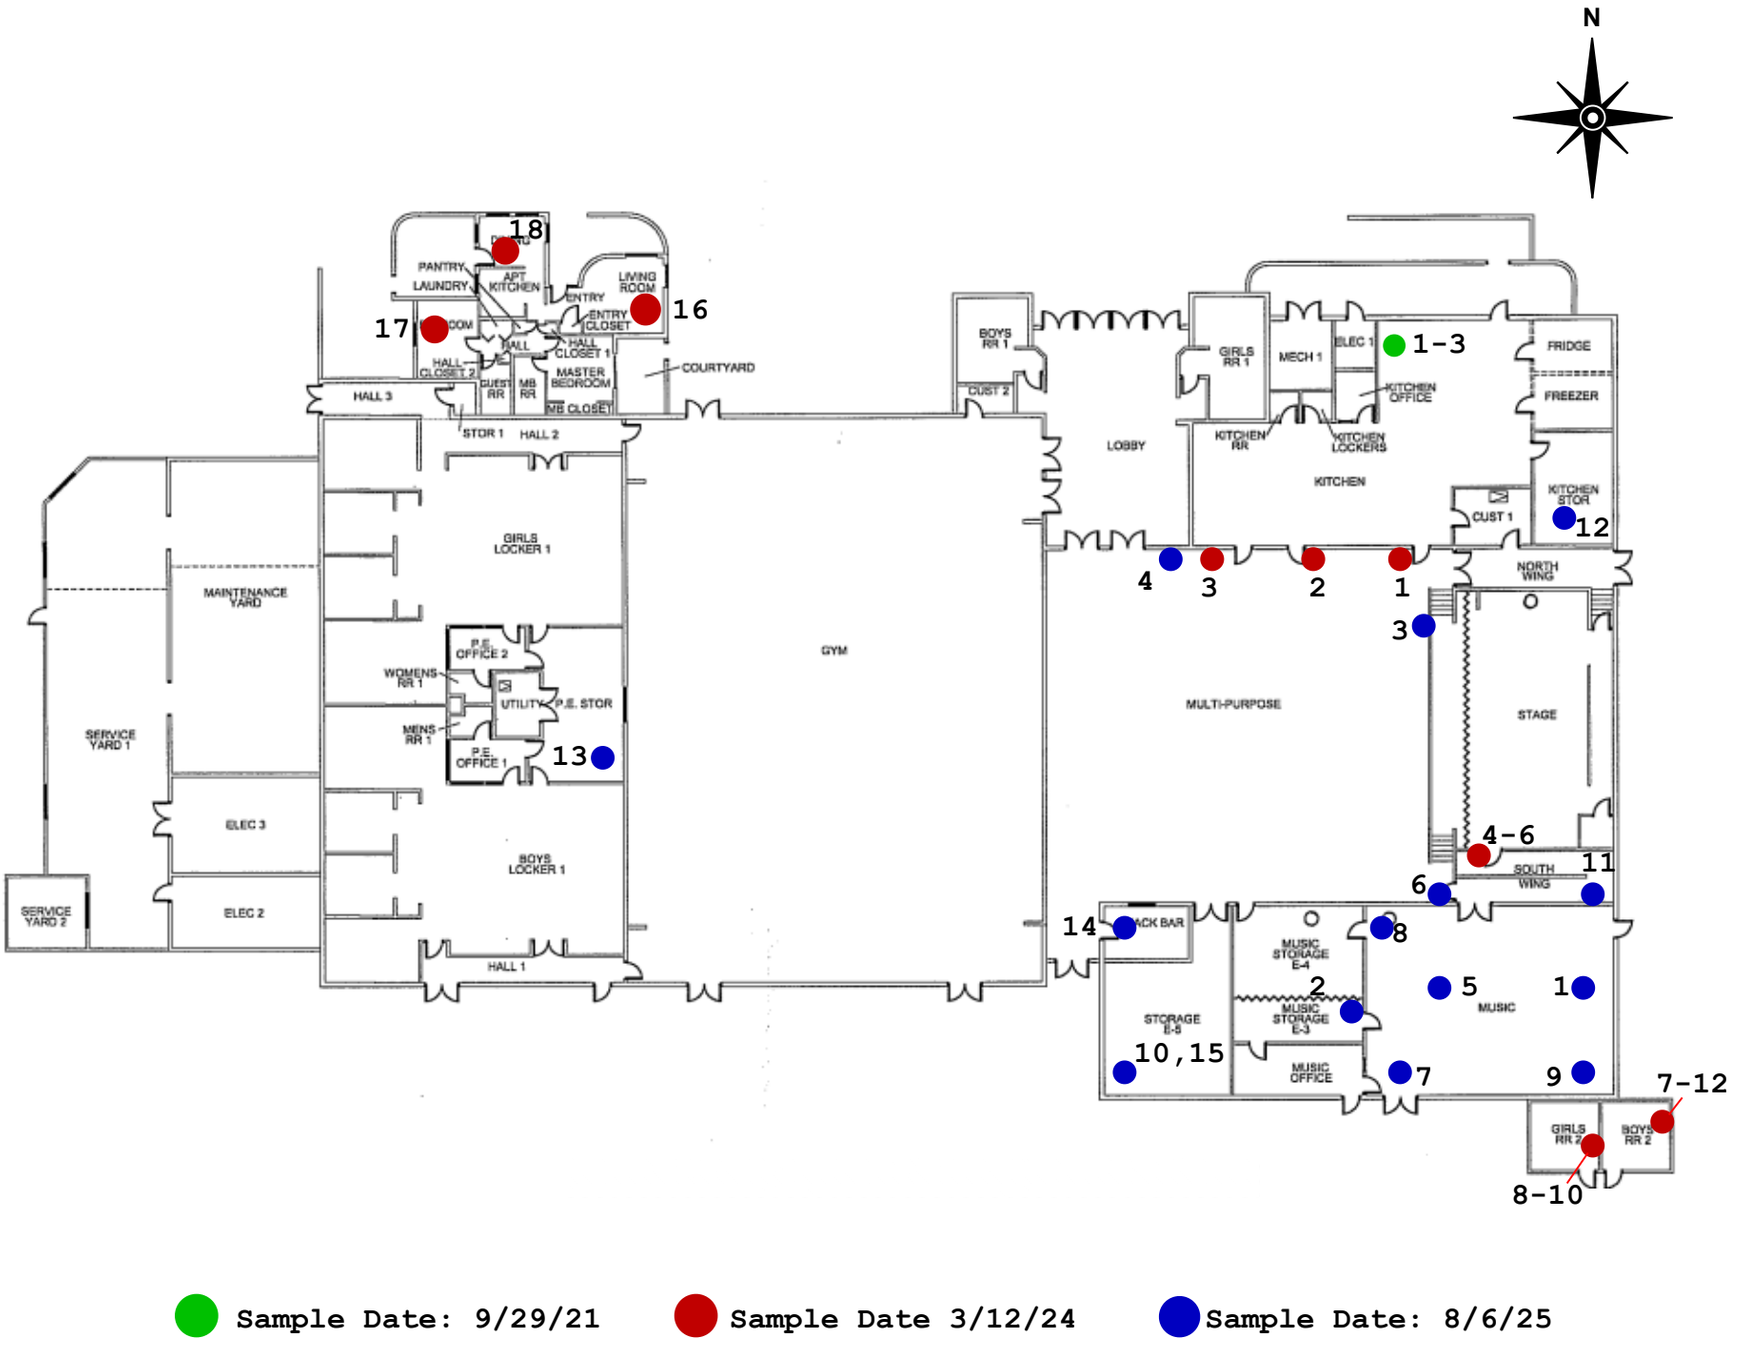


Sample Date: 9/29/21 **Sample Date 3/12/24** **Sample Date: 8/6/25**

PLM Sample Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building E

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

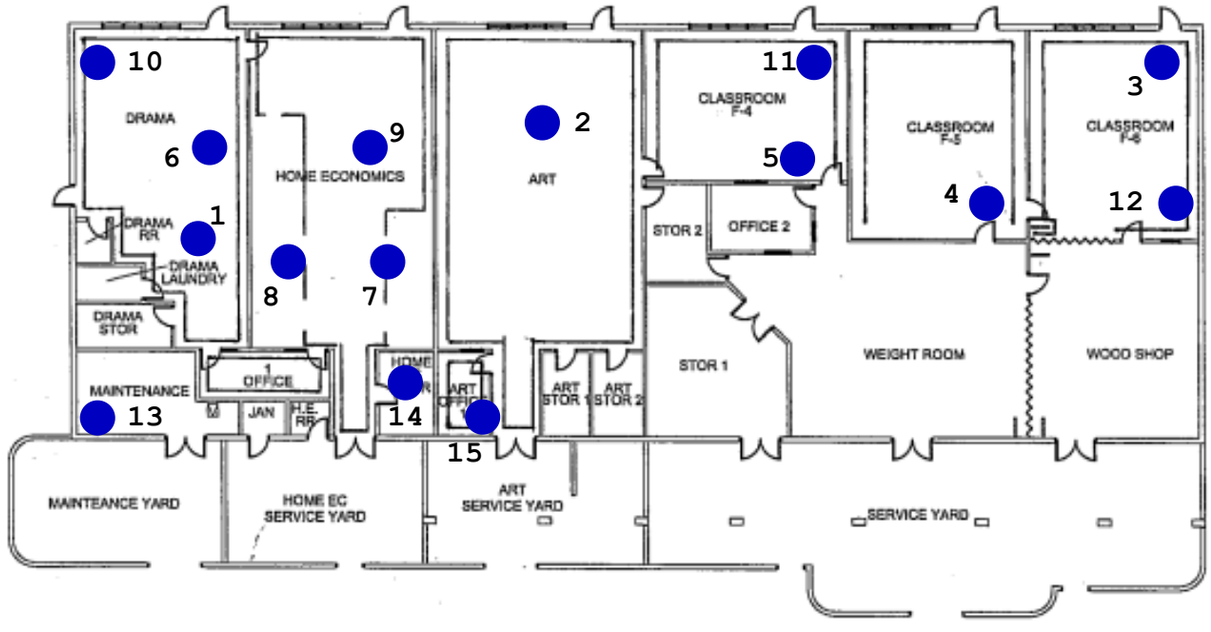


Sample Date: 8/4/2025

PLM Sample Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building F

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

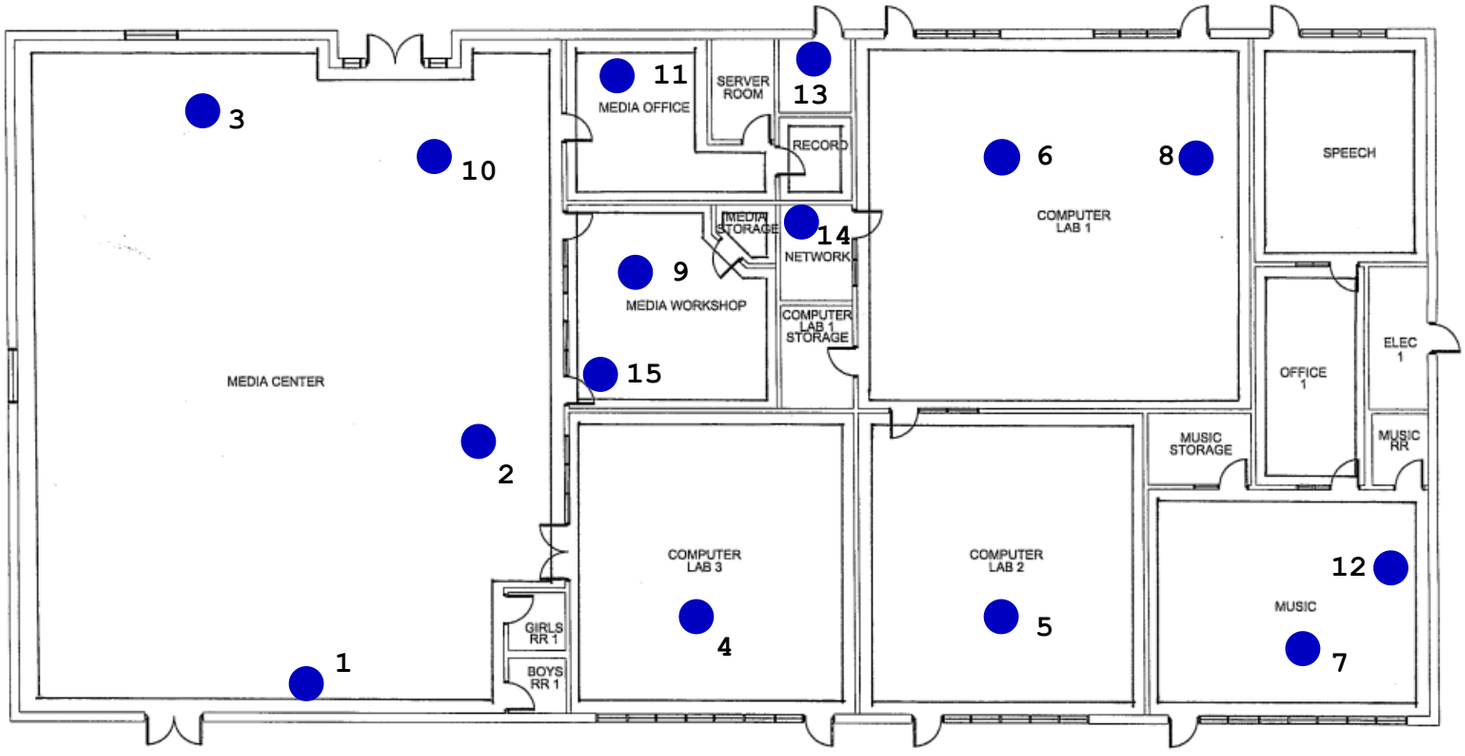


Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building G

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

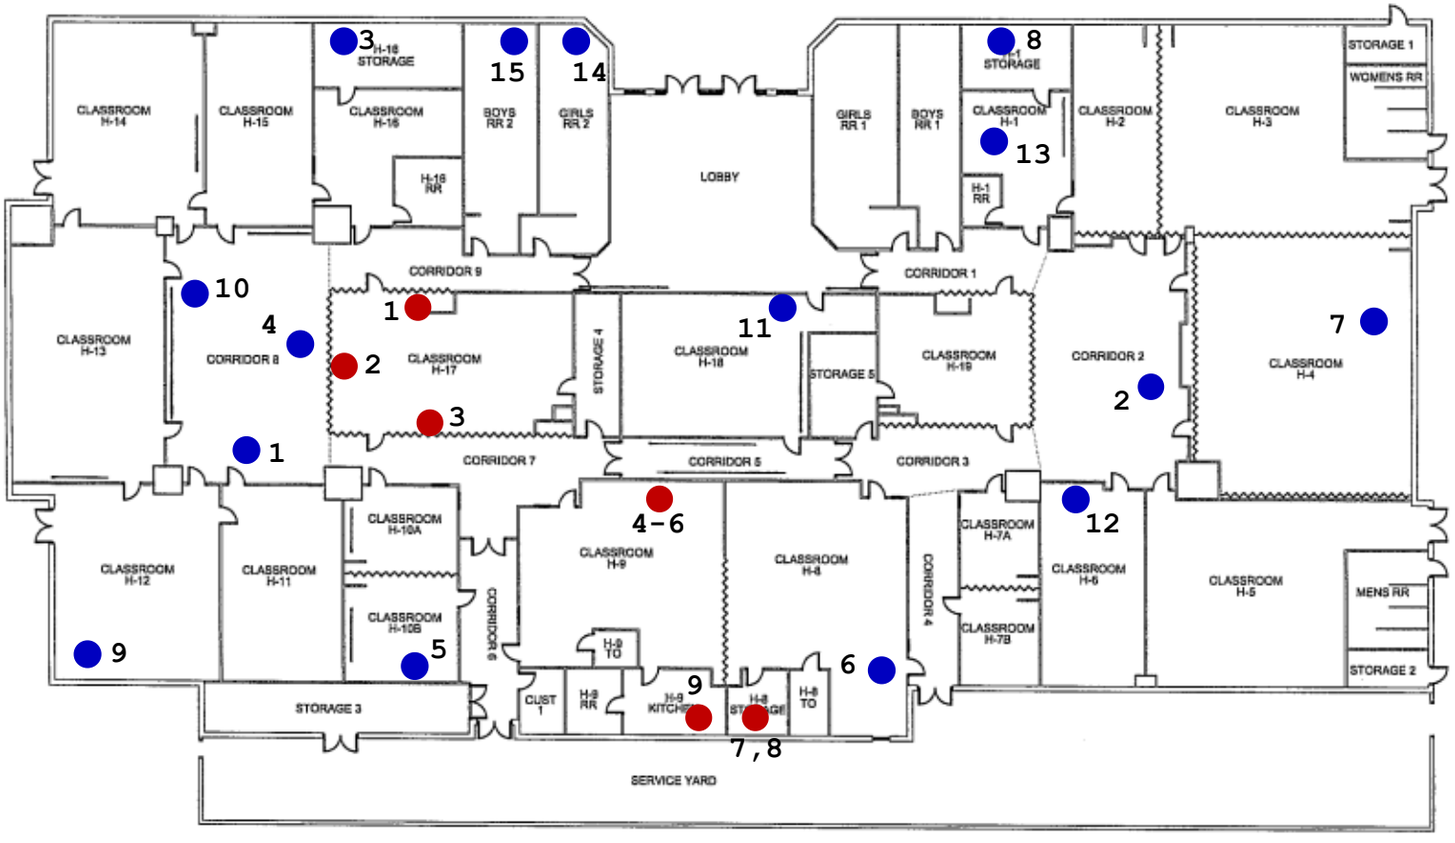

Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building H

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

SECTION 8

♦

PHYSICAL ASSESSMENT INFORMATION SHEETS

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.56 **Client:** Kyrene Elementary School District **Site:** Kyrene Centennial Middle School **Bldg. #:** F

(HM) Material #: 44 **Quantity of Material:** 2,500 sq. ft .. **Material in Air Plenum?** Yes No

Material Description: Skylight Insulation Panel **Material Location(s):** Above Ceilings in Classrooms

Material Type: TSI Surfacing
Miscellaneous (Circle One)

Physical Assessment Categories

G	1) Damaged or significantly damaged TSI ACBM	G	5) ACBM with potential for damage
G	2) Damaged friable surfacing ACBM	G	6) ACBM with potential for significant damage
G	3) Significantly damaged friable surfacing ACBM	■	7) Any remaining friable ACBM or friable suspect ACBM
G	4) Damaged or significantly damaged friable misc. ACBM		

Material Condition

Damage Type: G Physical G Water G Air Erosion G Other
G Vandalism G Vibration ■ None

Damage Extent: ■ Low <1% evenly; 10% locally G Moderate <10% evenly; 10% - 25% locally G High >10% evenly; >25% locally

Description of Damage: None, Assumed ACBM

Exposure Factors

Accessibility:	■	Low	**Occupancy:**	G	Low	**Potential for Contact:**	■	Low	**Potential for Vibration:**	G	Low	**Potential for Air Erosion:**	G	Low
	G	Moderate		■	Moderate		G	Moderate		■	Moderate		■	Moderate
	G	High		G	High		G	High		G	High		G	High

Preventative Measures: Low Potential for Disturbance

Hazard Classification/Assessment Categories

■	1) Good condition with low potential for disturbance damage	G	5) Damaged condition with potential for disturbance damage
G	2) Good condition with potential for disturbance damage	G	6) Damaged condition with potential for significant disturbance damage
G	3) Good condition with potential for significant disturbance damage	G	7) Significant damage with potential for any disturbance
G	4) Damaged condition with low potential for disturbance damage		

Inspector: Nick Marcos
Certificate #: ON-188748-8873-031325 **State:** Arizona
Signature: Nick Marcos **Exp Date:** March 13, 2025

Management Planner: Xin Lou
Certificate #: ON-4651-548-100324 **State:** Arizona
Signature: Shane Lou **Exp Date:** October 3, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.56 **Client:** Kyrene Elementary School District **Site:** Kyrene Centennial Middle School **Bldg. #:** G

(HM) Material #: 38 **Quantity of Material:** 1,500 sq. ft .. **Material in Air Plenum?** Yes No

Material Description: Skylight Insulation Panel **Material Location(s):** Above Ceilings in Classrooms

Material Type: TSI Surfacing
Miscellaneous (Circle One)

Physical Assessment Categories

G 1) Damaged or significantly damaged TSI ACBM
G 2) Damaged friable surfacing ACBM
G 3) Significantly damaged friable surfacing ACBM
G 4) Damaged or significantly damaged friable misc. ACBM
G 5) ACBM with potential for damage
G 6) ACBM with potential for significant damage
■ 7) Any remaining friable ACBM or friable suspect ACBM

Material Condition

Damage Type: G Physical G Water G Air Erosion G Other
G Vandalism G Vibration ■ None

Damage Extent: ■ Low <1% evenly; 10% locally G Moderate <10% evenly; 10% - 25% locally G High >10% evenly; >25% locally

Description of Damage: None, Assumed ACBM

Exposure Factors

Accessibility:	■	Low	**Occupancy:**	G	Low	**Potential for Contact:**	■	Low	**Potential for Vibration:**	G	Low	**Potential for Air Erosion:**	G	Low
	G	Moderate		■	Moderate		G	Moderate		■	Moderate		■	Moderate
	G	High		G	High		G	High		G	High		G	High

Preventative Measures: Low Potential for Disturbance

Hazard Classification/Assessment Categories

■ 1) Good condition with low potential for disturbance damage
G 2) Good condition with potential for disturbance damage
G 3) Good condition with potential for significant disturbance damage
G 4) Damaged condition with low potential for disturbance damage
G 5) Damaged condition with potential for disturbance damage
G 6) Damaged condition with potential for significant disturbance damage
G 7) Significant damage with potential for any disturbance

Inspector: Nick Marcos
Certificate #: ON-188748-8873-031325 **State:** Arizona
Signature: Nick Marcos **Exp Date:** March 13, 2025

Management Planner: Xin Lou
Certificate #: ON-4651-548-100324 **State:** Arizona
Signature: Shane Lou **Exp Date:** October 3, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.56 **Client:** Kyrene Elementary School District **Site:** Kyrene Centennial Middle School **Bldg. #:** H

(HM) Material #: 68 **Quantity of Material:** 2,000 sq. ft .. **Material in Air Plenum?** Yes No

Material Description: Skylight Insulation Panel **Material Location(s):** Above Ceilings in Classrooms

Material Type: TSI Surfacing
Miscellaneous (Circle One)

Physical Assessment Categories

G 1) Damaged or significantly damaged TSI ACBM
G 2) Damaged friable surfacing ACBM
G 3) Significantly damaged friable surfacing ACBM
G 4) Damaged or significantly damaged friable misc. ACBM
G 5) ACBM with potential for damage
G 6) ACBM with potential for significant damage
■ 7) Any remaining friable ACBM or friable suspect ACBM

Material Condition

Damage Type: G Physical G Vandalism G Water G Vibration G Air Erosion ■ None G Other

Damage Extent: ■ Low <1% evenly; 10% locally G Moderate <10% evenly; 10% - 25% locally G High >10% evenly; >25% locally

Description of Damage: None, Assumed ACBM

Exposure Factors

Accessibility:	■	Low	**Occupancy:**	G	Low	**Potential for Contact:**	■	Low	**Potential for Vibration:**	G	Low	**Potential for Air Erosion:**	G	Low
	G	Moderate		■	Moderate		G	Moderate		■	Moderate		■	Moderate
	G	High		G	High		G	High		G	High		G	High

Preventative Measures: Low Potential for Disturbance

Hazard Classification/Assessment Categories

■ 1) Good condition with low potential for disturbance damage
G 2) Good condition with potential for disturbance damage
G 3) Good condition with potential for significant disturbance damage
G 4) Damaged condition with low potential for disturbance damage
G 5) Damaged condition with potential for disturbance damage
G 6) Damaged condition with potential for significant disturbance damage
G 7) Significant damage with potential for any disturbance

Inspector: Nick Marcos
Certificate #: ON-188748-8873-031325 **State:** Arizona
Signature: Nick Marcos **Exp Date:** March 13, 2025

Management Planner: Xin Lou
Certificate #: ON-4651-548-100324 **State:** Arizona
Signature: Shane Lou **Exp Date:** October 3, 2025

SECTION 9

♦

LABORATORY REPORTS

eurofins | Built Environment Testing

Report for:

Tracey Carpenter
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.11; Contennial = Bldg A
EML ID: 3571431

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 03-13-2024

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Contennial = Bldg A

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Total Samples Submitted:	6
Total Samples Analyzed:	6
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, Skip Trowel Drywall System Lab ID-Version‡: 17453837-1

Sample Layers	Asbestos Content
Peach Paint #1	ND
White Texture #1	ND
Cream Tape	ND
White Joint Compound #1	ND
Peach Paint #2	ND
White Joint Compound #2	ND
Yellow Tape (Mesh)	ND
Peach Paint #3	ND
White Texture #2	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-2, Skip Trowel Drywall System Lab ID-Version‡: 17453838-1

Sample Layers	Asbestos Content
Peach Paint #1	ND
White Texture #1	ND
Cream Tape	ND
White Joint Compound	ND
Peach Paint #2	ND
White Texture #2	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Contennial = Bldg A

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM-3, Skip Trowel Drywall System

Lab ID-Version‡: 17453839-1

Sample Layers	Asbestos Content
Peach Paint #1	ND
White Texture #1	ND
Cream Tape	ND
White Joint Compound	ND
Peach Paint #2	ND
White Texture #2	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Contennial = Bldg A

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM-4, White w/Gray Specks 12''x12'' VCT & Mastic Lab ID-Version‡: 17453840-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Semi-Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-5, White w/Gray Specks 12''x12'' VCT & Mastic Lab ID-Version‡: 17453841-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Semi-Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-6, White w/Gray Specks 12''x12'' VCT & Mastic Lab ID-Version‡: 17453842-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Semi-Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins

www.EMLabPK.com

EMLab P&K

Marlton, NJ: 3000 Lincoln Dr E, Ste. A, Marlton, NJ 08053 * **(866) 871-1984**
Phoenix, AZ: 1501 West Knudsen Drive, Phoenix, AZ 85027 * **(800) 651-4802**
SSF, CA: 6000 Shoreline Ct, Ste. 205, S. San Francisco, CA 94080 * **(866) 888-6653**

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

003571431

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address: 20045 N. 19th Ave, Bldg 7, Phoenix, AZ 85027	
Contact:	Tracey Carpenter	Special Instructions: email results: tcarpenter@dominion-env.com	
Phone:	(602) 989-9992		

PROJECT INFORMATION

Project ID:	AZ1418.11		
Project Description:	Centennial - Bldg A		
Project Zip Code:	85044	Sampling Date/Time:	3/12/24 @ 9:45 AM
PO Number:	316021	Sampled By:	TLC

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	Skip Trowel Drywall System	B	STD		
PLM 4-6	White w/Gray Specks 12" x 12" VCT + Mastic	B	STD		

SERVICES	Spore Trap		Tape, Swab, Bulk			Cassette Andersen, SAS, Swab, Water, Bulk, Dust, Soil, Contact Plate								Other Requests					
	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quantitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp. spp.)	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and Surface Bacteria)	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)		Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb)	PCR (please specify test)	Allergens (please specify test)	
PLM 1-3															X				
PLM 4-6															X				

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Tracey Carpenter	3/13/24 @ 8 AM	Kathy Wyo	3/13/24 8:10am

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.56; Kyrene Centennial Middle School-Bldg A
EML ID: 4180251

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 08-11-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg A

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885639-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-2, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885640-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-3, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885641-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-4, Old 2"x2" Ceiling Tile Lab ID-Version‡: 20885642-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg A

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-5, Old 2"x2" Ceiling Tile Lab ID-Version‡: 20885643-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-6, Old 2"x2" Ceiling Tile Lab ID-Version‡: 20885644-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885645-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-8, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885646-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg A

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-9, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885647-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-10, Blue Cove Base and Mastic Lab ID-Version‡: 20885648-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Blue Cove Base and Mastic Lab ID-Version‡: 20885649-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Blue Cove Base and Mastic Lab ID-Version‡: 20885650-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg A

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-13, Orange Peel D.W. (paint,tex,tape,j.c.d.w.) Lab ID-Version‡: 20885651-1

Sample Layers	Asbestos Content
Beige Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-14, Orange Peel D.W. (paint,tex,tape,j.c.d.w.) Lab ID-Version‡: 20885652-1

Sample Layers	Asbestos Content
Beige Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-15, Orange Peel D.W. (paint,tex,tape,j.c.d.w.) Lab ID-Version‡: 20885653-1

Sample Layers	Asbestos Content
Beige Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg A

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Aaron Agajanian

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.56		
Project Description:	Kyrene Centennial Middle School - Bldg A		
Project Zip Code:		Sampling Date/Time:	8/4/2025
PO Number:	16805	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

REQUESTED SERVICES

Non-Culturable | Culturable | Requests

004180251

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quatitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp. spp.)	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and Surfac	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOS	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3	New 2' X 2' Ceiling Tile	B	STD																X			
PLM 4-6	Old 2' X 2' Ceiling Tile	B	STD																X			
PLM 7-9	Gray Multi-Color Carpet Square and Mastic	B	STD																X			
PLM 10-12	Blue Cove Base and Mastic	B	STD																X			
PLM 13-15	Orange Peel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD																X			

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Nick Marcos	8/8/2025		8-8-25 3:45 pc

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Tracey Carpenter
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.11; Centenial - Bldg B
EML ID: 3571460

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 03-13-2024

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg B

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Total Samples Submitted:	6
Total Samples Analyzed:	6
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM1, 2"x2" Tan Floor Tile + Grout + Thinset Lab ID-Version‡: 17454157-1

Sample Layers	Asbestos Content
Tan Ceramic Tile	ND
Cream Mastic	ND
Gray Grout	ND
Gray Mortar	ND
Sample Composite Homogeneity:	Poor

Location: PLM2, 2"x2" Tan Floor Tile + Grout + Thinset Lab ID-Version‡: 17454158-1

Sample Layers	Asbestos Content
Tan Ceramic Tile	ND
Gray Grout	ND
Gray Mortar	ND
Sample Composite Homogeneity:	Poor

Location: PLM3, 2"x2" Tan Floor Tile + Grout + Thinset Lab ID-Version‡: 17454159-1

Sample Layers	Asbestos Content
Tan Ceramic Tile	ND
Cream Mastic	ND
Gray Grout	ND
Gray Mortar	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg B

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM4, White RR Wall Tile + Grout + Mastic Lab ID-Version‡: 17454160-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

Location: PLM5, White RR Wall Tile + Grout + Mastic Lab ID-Version‡: 17454161-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Gray Caulk	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

Location: PLM6, White RR Wall Tile + Grout + Mastic Lab ID-Version‡: 17454162-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins

www.EMLabPK.com

EMLab P&K

Marlton, NJ: 3000 Lincoln Dr E, Ste. A, Marlton, NJ 08053 * (866) 871-1984
Phoenix, AZ: 1501 West Knudsen Drive, Phoenix, AZ 85027 * (800) 651-4802
SSF, CA: 6000 Shoreline Ct, Ste. 205, S. San Francisco, CA 94080 * (866) 888-6653

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address: 20045 N. 19th Ave, Bldg 7, Phoenix, AZ 85027	
Contact:	Tracey Carpenter	Special Instructions: email results: tcarpenter@dominion-env.com	
Phone:	(602) 989-9992		

PROJECT INFORMATION

Project ID:	AZ1418.11		
Project Description:	Centenial - Bldg B		
Project Zip Code:	85044	Sampling Date/Time:	3/12@9:30 AM
PO Number:	316022	Sampled By:	TLC

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

REQUESTED SERVICES

Non-Culturable: Spore Trap; Tape, Swab, Bulk
Culturable: BioCassette™, Andersen, SAS, Swab, Water, Bulk, Dust, Soil, Contact Plate
Other Requests

003571460

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	2" x 2" Tan Floor Tile + Grout + Thinset	B / 1	STD / 1		
PLM 4-6	White RR Wall Tile + Grout + Mastic	B / 1	STD / 1		

Spore Trap Analysis	Other biological particles - suppleme	Direct Microscopic Exam (Qualitative	Qualitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + /	Culturable Air Fungi (Genus ID + Asp	Gram Stain and Counts (Culturable A	Legionella culture	Total Coliform, E.coli (Presence/Abse	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb)	PCR (please specify test)	Allergens (please specify test)
													X			
													+			

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Tracey Carp	3/13/24 @8 AM	Patty Lugo	3/13/24 8:10 am

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.56; Kyrene Centennial Middle School- Bldg B
EML ID: 4180258

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 08-11-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg B

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885830-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-2, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885831-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-3, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885832-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-4, Old 2"x2" Ceiling Tile Lab ID-Version‡: 20885833-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg B

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-5, Old 2"x2" Ceiling Tile Lab ID-Version‡: 20885834-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-6, Old 2"x2" Ceiling Tile Lab ID-Version‡: 20885835-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885836-1

Sample Layers	Asbestos Content
Gray Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-8, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885837-1

Sample Layers	Asbestos Content
Gray Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg B

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-9, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885838-1

Sample Layers	Asbestos Content
Gray Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-10, Blue Cove Base and Mastic Lab ID-Version‡: 20885839-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Blue Cove Base and Mastic Lab ID-Version‡: 20885840-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Blue Cove Base and Mastic Lab ID-Version‡: 20885841-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg B

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-13, Orange Peel D.W. (paint,tex,tape,j.c.,d.w.) Lab ID-Version‡: 20885842-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-14, Orange Peel D.W. (paint,tex,tape,j.c.,d.w.) Lab ID-Version‡: 20885843-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-15, Orange Peel D.W. (paint,tex,tape,j.c.,d.w.) Lab ID-Version‡: 20885844-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg B

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Kaitlyn Walker

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.56		
Project Description:	Kyrene Centennial Middle School - Bldg B		
Project Zip Code:		Sampling Date/Time:	8/5/2025
PO Number:	16808	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

REQUESTED SERVICES

Non

Spore Trap

004180258

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quatitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + *Asp.* spp.)	Culturable Air Fungi (Genus ID + *Asp.* spp.)	Gram Stain and Counts (Culturable Air and Surface	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3	New 2' X 2' Ceiling Tile	B	STD																X			
PLM 4-6	Old 2' X 2' Ceiling Tile	B	STD																X			
PLM 7-9	Gray Multi-Color Carpet Square and Mastic	B	STD																X			
PLM 10-12	Blue Cove Base and Mastic	B	STD																X			
PLM 13-15	Orange Peel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD																X			

Other Requests

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Nick Marcos	8/8/2025		8-8-25 3:35 PM

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Tracey Carpenter
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.11; Centenial - Bldg C
EML ID: 3571470

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 03-13-2024

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg C

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Total Samples Submitted:	3
Total Samples Analyzed:	3
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM1, White RR Wall Tiles + Grout + Mastic Lab ID-Version‡: 17454045-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

Location: PLM2, White RR Wall Tiles + Grout + Mastic Lab ID-Version‡: 17454046-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

Location: PLM3, White RR Wall Tiles + Grout + Mastic Lab ID-Version‡: 17454047-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins

www.EMLabPK.com

EMLab P&K

Marlton, NJ: 3000 Lincoln Dr E, Ste. A, Marlton, NJ 08053 * (866) 871-1984
Phoenix, AZ: 1501 West Knudsen Drive, Phoenix, AZ 85027 * (800) 651-4802
SSF, CA: 6000 Shoreline Ct, Ste. 205, S. San Francisco, CA 94080 * (866) 888-6653

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

REQUESTED SERVICES

Non-Culturable		Culturable	Other Requests
Spore Trap	Tape, Swab, Bulk	BioCassette™, Andersen, SAS, Swab, Water, Soil,	

003571470

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address: 20045 N. 19th Ave, Bldg 7, Phoenix, AZ 85027	
Contact:	Tracey Carpenter	Special Instructions: email results: tcarpenter@dominion-env.com	
Phone:	(602) 989-9992		

PROJECT INFORMATION

Project ID:	AZ 1418.11		
Project Description:	Centenial - Bldg C		
Project Zip Code:	85044	Sampling Date/Time:	3/12/24 @ 10:30 AM
PO Number:	316023	Sampled By:	TLC

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quantitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp.	Culturable Air Fungi (Genus ID + Asp. sp	Gram Stain and Counts (Culturable Air an	Legionella culture	Total Coliform, E.coli (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb)	PCR (please specify test)	Allergens (please specify test)
PLM 1-3	White RR Wall Tiles	B	STD																X			
	+ Grout + Mastic	1	1																1-X			

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Tracy Carp	3/13/24 @ 8 AM	Ruby Lugo	3/13/24 8:10 am

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.56; Kyrene Centennial Middle School- Bldg C
EML ID: 4180255

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 08-11-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg C

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, New 2"x2" Ceiling Tile Lab ID-Version‡: 20886079-1

Sample Layers	Asbestos Content
Gray/White Ceiling Tile	ND
Composite Non-Asbestos Content:	60% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-2, New 2"x2" Ceiling Tile Lab ID-Version‡: 20886080-1

Sample Layers	Asbestos Content
Gray/White Ceiling Tile	ND
Composite Non-Asbestos Content:	60% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-3, New 2"x2" Ceiling Tile Lab ID-Version‡: 20886081-1

Sample Layers	Asbestos Content
Gray/White Ceiling Tile	ND
Composite Non-Asbestos Content:	60% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-4, Old 2"x2" Ceiling Tile Lab ID-Version‡: 20886082-1

Sample Layers	Asbestos Content
Gray/White Ceiling Tile	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg C

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-5, Old 2"x2" Ceiling Tile

Lab ID-Version‡: 20886083-1

Sample Layers	Asbestos Content
Gray/White Ceiling Tile	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-6, Old 2"x2" Ceiling Tile

Lab ID-Version‡: 20886084-1

Sample Layers	Asbestos Content
Gray/White Ceiling Tile	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20886085-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-8, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20886086-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg C

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-9, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20886087-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-10, Blue Cove Base and Mastic Lab ID-Version‡: 20886088-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Blue Cove Base and Mastic Lab ID-Version‡: 20886089-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Blue Cove Base and Mastic Lab ID-Version‡: 20886090-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg C

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-13, Orange poeel D.W. (paint,tex,tape,j.c,d.w) Lab ID-Version‡: 20886091-1

Sample Layers	Asbestos Content
Cream Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
Cream Tape 2	ND
White Joint Compound 2	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	18% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-14, Orange poeel D.W. (paint,tex,tape,j.c,d.w) Lab ID-Version‡: 20886092-1

Sample Layers	Asbestos Content
Cream Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
Cream Tape 2	ND
White Joint Compound 2	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	18% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-15, Orange poeel D.W. (paint,tex,tape,j.c,d.w) Lab ID-Version‡: 20886093-1

Sample Layers	Asbestos Content
Cream Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg C

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Aaron Agajanian

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.56		
Project Description:	Kyrene Centennial Middle School - Bldg C		
Project Zip Code:		Sampling Date/Time:	8/5/2025
PO Number:	16809	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

REQUESTED SERVICES

004180255

Non-Cultural

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quatitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp. spp.)	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and Surface Ba	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3	New 2' X 2' Ceiling Tile	B	STD																X			
PLM 4-6	Old 2' X 2' Ceiling Tile	B	STD																X			
PLM 7-9	Gray Multi-Color Carpet Square and Mastic	B	STD																X			
PLM 10-12	Blue Cove Base and Mastic	B	STD																X			
PLM 13-15	Orange Peel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD																X			

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Nick Marcos	8/8/2025		8-8-25
			3:35 PM

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Tracey Carpenter
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.11; Centenial - Bldg D
EML ID: 3571449

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 03-13-2024

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg D

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Total Samples Submitted:	12
Total Samples Analyzed:	12
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM1, White RR Wall Tiles + Grout + Mastic Lab ID-Version‡: 17454320-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

Location: PLM2, White RR Wall Tiles + Grout + Mastic Lab ID-Version‡: 17454321-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

Location: PLM3, White RR Wall Tiles + Grout + Mastic Lab ID-Version‡: 17454322-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg D

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM4, 2"x2" Tan Floor Tiles + Grout + Thinset

Lab ID-Version‡: 17454323-1

Sample Layers	Asbestos Content
Off-White Ceramic Tile	ND
Gray Grout	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg D

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM5, 2"x2" Tan Floor Tiles + Grout + Thinset Lab ID-Version‡: 17454324-1

Sample Layers	Asbestos Content
Off-White Ceramic Tile	ND
Gray Grout	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Poor

Location: PLM6, 2"x2" Tan Floor Tiles + Grout + Thinset Lab ID-Version‡: 17454325-1

Sample Layers	Asbestos Content
Off-White Ceramic Tile	ND
Gray Grout	ND
Yellow Mastic	ND
Dark Gray Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM7, 2"x2" Pink Floor Tile + Grout + Thinset Lab ID-Version‡: 17454326-1

Sample Layers	Asbestos Content
Pink Ceramic Tile	ND
Gray Grout	ND
Beige Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM8, 2"x2" Pink Floor Tile + Grout + Thinset Lab ID-Version‡: 17454327-1

Sample Layers	Asbestos Content
Pink Ceramic Tile	ND
Gray Grout	ND
Beige Thinset	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg D

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM9, 2"x2" Pink Floor Tile + Grout + Thinset Lab ID-Version‡: 17454328-1

Sample Layers	Asbestos Content
Pink Ceramic Tile	ND
Gray Grout	ND
Beige Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM10, 2"x2" Green Floor Tile + Grout + Thinset Lab ID-Version‡: 17454329-1

Sample Layers	Asbestos Content
Green Ceramic Tile	ND
Gray Grout	ND
Beige Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM11, 2"x2" Green Floor Tile + Grout + Thinset Lab ID-Version‡: 17454330-1

Sample Layers	Asbestos Content
Green Ceramic Tile	ND
Gray Grout	ND
Beige Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM12, 2"x2" Green Floor Tile + Grout + Thinset Lab ID-Version‡: 17454331-1

Sample Layers	Asbestos Content
Green Ceramic Tile	ND
Gray Grout	ND
Beige Thinset	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins

www.EMLabPK.com

EMLab P&K

Marlton, NJ: 3000 Lincoln Dr E, Ste. A, Marlton, NJ 08053 * (866) 871-1984
Phoenix, AZ: 1501 West Knudsen Drive, Phoenix, AZ 85027 * (800) 651-4802
SSF, CA: 6000 Shoreline Ct, Ste. 205, S. San Francisco, CA 94080 * (866) 888-6653

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

REQUESTED SERVICES

Non-Culturable: Spore Trap; Tape, Swab, Bulk

Culturable: BioCassette™, Andersen, SAS, Swab, Water, Bulk, Dust, Soil, Contact Plate

Other Requests

003571449

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address: 20045 N. 19th Ave, Bldg 7, Phoenix, AZ 85027	
Contact:	Tracey Carpenter	Special Instructions: email results: tcarpenter@dominion-env.com	
Phone:	(602) 989-9992		

PROJECT INFORMATION

Project ID:	AZ 1418.11		
Project Description:	Centenial - Bldg D		
Project Zip Code:	85044	Sampling Date/Time:	3/12/24 @10:30 AM
PO Number:	316024	Sampled By:	TLC

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	White RR Wall Tiles	B	STD		
	+ Grout + Mastic	1	1		
PLM 4-6	2" x 2" Tan Floor Tiles	B	STD		
	+ Grout + Thinset	1			
PLM 7-9	2" x 2" Pink Floor Tile	B	STD		
	+ Grout + Thinset	1	1		
PLM 10-12	2" x 2" Green Floor Tile	B	STD		
	+ Grout + Thinset	1			

Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quantitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp	Culturable Air Fungi (Genus ID + Asp. s	Gram Stain and Counts (Culturable Air s	Legionella culture	Total Coliform, E.coli (Presence/Absenc	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb)	PCR (please specify test)	Allergens (please specify test)
												7	7			
													7			
													X			
												X				
												7				

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME
Tracey Carp	3/13/24 @8AM

RECEIVED BY	DATE & TIME
Dyani Zamora	3/13/24 810AM

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.56; Kyrene Centennial Middle School - Bldg. D
EML ID: 4180266

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 08-11-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. D

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, New 2'x2' Ceiling Tile

Lab ID-Version‡: 20885860-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-2, New 2'x2' Ceiling Tile

Lab ID-Version‡: 20885861-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-3, New 2'x2' Ceiling Tile

Lab ID-Version‡: 20885862-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-4, Old 2'x2' Ceiling Tile

Lab ID-Version‡: 20885863-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. D

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-5, Old 2'x2' Ceiling Tile Lab ID-Version‡: 20885864-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-6, Old 2'x2' Ceiling Tile Lab ID-Version‡: 20885865-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Gray Mulit-Color Carpet Square and Mastic Lab ID-Version‡: 20885866-1

Sample Layers	Asbestos Content
Blue Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-8, Gray Mulit-Color Carpet Square and Mastic Lab ID-Version‡: 20885867-1

Sample Layers	Asbestos Content
Blue Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. D

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-9, Gray Mulit-Color Carpet Square and Mastic Lab ID-Version‡: 20885868-1

Sample Layers	Asbestos Content
Blue Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-10, Blue Cove Base and Mastic Lab ID-Version‡: 20885869-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Blue Cove Base and Mastic Lab ID-Version‡: 20885870-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Blue Cove Base and Mastic Lab ID-Version‡: 20885871-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. D

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-13, Orange Peel D.W. (paint, tex, tape, j.c., d.w. Lab ID-Version‡: 20885872-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-14, Orange Peel D.W. (paint, tex, tape, j.c., d.w. Lab ID-Version‡: 20885873-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-15, Orange Peel D.W. (paint, tex, tape, j.c., d.w. Lab ID-Version‡: 20885874-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. D

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Shelby Brown

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

004180266

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.56		
Project Description:	Kyrene Centennial Middle School - Bldg. D		
Project Zip Code:		Sampling Date/Time:	8/6/2025
PO Number:	16811	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SERVICES

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quatitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + *Asp.* spp.)	Culturable Air Fungi (Genus ID + *Asp.* spp.)	Gram Stain and Counts (Culturable Air and Surface Bacter	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Other Requests: Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3	New 2' X 2' Ceiling Tile	B	STD																X			
PLM 4-6	Old 2' X 2' Ceiling Tile	B	STD																X			
PLM 7-9	Gray Multi-Color Carpet Square and Mastic	B	STD																X			
PLM 10-12	Blue Cove Base and Mastic	B	STD																X			
PLM 13-15	Orange Peel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD																X			

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME
Nick Marcos	8/8/2025

RECEIVED BY	DATE & TIME
Patty Lugo	8/8/25 2:40pm

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Tracey Carpenter
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.11; Centenial - Bldg E
EML ID: 3571445

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 03-13-2024

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg E

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Total Samples Submitted:	12
Total Samples Analyzed:	12
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM1, Red 12"x12" VCT + Mastic Lab ID-Version‡: 17454405-1

Sample Layers	Asbestos Content
Red Floor Tile	ND
Semi-Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM2, Red 12"x12" VCT + Mastic Lab ID-Version‡: 17454406-1

Sample Layers	Asbestos Content
Red Floor Tile	ND
Semi-Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM3, Red 12"x12" VCT + Mastic Lab ID-Version‡: 17454407-1

Sample Layers	Asbestos Content
Red Floor Tile	ND
Semi-Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM4, Brown Stair Tread + Mastic Lab ID-Version‡: 17454408-1

Sample Layers	Asbestos Content
Brown Stair Tread	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg E

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM5, Brown Stair Tread + Mastic Lab ID-Version‡: 17454409-1

Sample Layers	Asbestos Content
Brown Stair Tread	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM6, Brown Stair Tread + Mastic Lab ID-Version‡: 17454410-1

Sample Layers	Asbestos Content
Brown Stair Tread	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM7, White RR Wall Tiles + Grout Lab ID-Version‡: 17454411-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Sample Composite Homogeneity:	Moderate

Location: PLM8, White RR Wall Tiles + Grout Lab ID-Version‡: 17454412-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg E

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM9, White RR Wall Tiles + Grout Lab ID-Version‡: 17454413-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Sample Composite Homogeneity:	Moderate

Location: PLM10, White 2"x2" Floor Tiles + Grout + Thinset Lab ID-Version‡: 17454414-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Dark Gray Grout	ND
Dark Gray Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM11, White 2"x2" Floor Tiles + Grout + Thinset Lab ID-Version‡: 17454415-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Dark Gray Grout	ND
Dark Gray Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM12, White 2"x2" Floor Tiles + Grout + Thinset Lab ID-Version‡: 17454416-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Dark Gray Grout	ND
Dark Gray Thinset	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins

www.EMLabPK.com

EMLab P&K

Marlton, NJ: 3000 Lincoln Dr E, Ste. A, Marlton, NJ 08053 * (866) 871-1984
Phoenix, AZ: 1501 West Knudsen Drive, Phoenix, AZ 85027 * (800) 651-4802
SSF, CA: 6000 Shoreline Ct, Ste. 205, S. San Francisco, CA 94080 * (866) 888-6653

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

REQUESTED SERVICES

Non-Culturable: Spore | Tape.

Culturable: BioCassette™ | Andersen, SAS, Dust, Soil, ate

Other Requests

003571445

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address: 20045 N. 19th Ave, Bldg 7, Phoenix, AZ 85027	
Contact:	Tracey Carpenter	Special Instructions: email results: tcarpenter@dominion-env.com	
Phone:	(602) 989-9992		

PROJECT INFORMATION

Project ID:	AZ 1418.11		
Project Description:	Centenial - Bldg E		
Project Zip Code:	85044	Sampling Date/Time:	3/12/24 @ 10AM
PO Number:	316025	Sampled By:	TL

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	Red 12"x12" VCT	B	STD		
	+ Mastic	1	1		
PLM 4-6	Brown Stair Tread	B	STD		
	+ Mastic	1	1		
PLM 7-9	White RR Wall Tiles	B	STD		
	+ Grout	1	1		
PLM 10-12	White 2" x 2" Floor Tile	B	STD		
	+ Grout + Thinset	1	1		

	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quantitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp. sp	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and S	Legionella culture	Total Coliform, E.coli (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb)	PCR (please specify test)	Allergens (please specify test)
PLM 1-3														X			
PLM 4-6														X			
PLM 7-9														X			
PLM 10-12														X			

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Tracey Carp	3/13/24 @ 8AM	Dyani Zamora	3/13/24 810AM

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.56; Kyrene Centennial Middle School-MPR Bldg
EML ID: 4180253

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 08-11-2025 and 08-12-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-MPR Bldg

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885679-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-2, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885680-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-3, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885681-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-4, Old 2"x2" Ceiling Tile Lab ID-Version‡: 20885682-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-MPR Bldg

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-5, Old 2"x2" Ceiling Tile

Lab ID-Version‡: 20885683-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-6, Old 2"x2" Ceiling Tile

Lab ID-Version‡: 20885684-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-7, Peach Soundboard Wrap and Insulation

Lab ID-Version‡: 20885685-1

Sample Layers	Asbestos Content
Peach Sound Board	ND
Yellow Adhesive	ND
Composite Non-Asbestos Content:	90% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-8, Peach Soundboard Wrap and Insulation

Lab ID-Version‡: 20885686-1

Sample Layers	Asbestos Content
Peach Sound Board	ND
Yellow Adhesive	ND
Composite Non-Asbestos Content:	90% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-MPR Bldg

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-9, Peach Soundboard Wrap and Insulation Lab ID-Version‡: 20885687-1

Sample Layers	Asbestos Content
Peach Sound Board	ND
Yellow Adhesive	ND
Composite Non-Asbestos Content:	90% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-10, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885688-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885689-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885690-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-MPR Bldg

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-13, Orange Peel D.W. (paint,tex,tape,j.c.,d.w.) Lab ID-Version‡: 20885691-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-14, Orange Peel D.W. (paint,tex,tape,j.c.,d.w.) Lab ID-Version‡: 20885692-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Yellow Paint	ND
White Texture 2	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-15, Orange Peel D.W. (paint,tex,tape,j.c.,d.w.) Lab ID-Version‡: 20885693-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Off-White Paint 2	ND
White Texture 2	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-MPR Bldg

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025


ASBESTOS PLM REPORT

PROJECT ANALYSTS AND SIGNATORY REPORT

Project Analysts



Analyst: Jason Bosse



Analyst: Kayla Heinen

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.56		
Project Description:	Kyrene Centennial Middle School - MPR Bldg.		
Project Zip Code:		Sampling Date/Time:	8/6/2025
PO Number:	16810	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

REQUESTED SERVICES

Non-Culturable: Spore Trap; Tape, Swab, Bulk
Culturable: BioCassette™ Andersen, SAS,
Other Requests

004180253

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Qualitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp. sp	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Coun	Asbestos Bulk - PLM (EPA method 600/R-9	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3	New 2' X 2' Ceiling Tile	B	STD																X			
PLM 4-6	Old 2' X 2' Ceiling Tile	B	STD																X			
PLM 7-9	Peach Soundboard Wrap and Insulation	B	STD																X			
PLM 10-12	Gray Multi-Color Carpet Square and Mastic	B	STD																X			
PLM 13-15	Orange Pèel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD																X			

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Nick Marcos	8/8/2025		8-8-25 3:35 pm

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.56; Kyrene Centennial Middle School - Bldg. F
EML ID: 4180262

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 08-12-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. F

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885940-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-2, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885941-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-3, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885942-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-4, Old 2'x2' Ceiling Tile Lab ID-Version‡: 20885943-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. F

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-5, Old 2'x2' Ceiling Tile Lab ID-Version‡: 20885944-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-6, Old 2'x2' Ceiling Tile Lab ID-Version‡: 20885945-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-7, Lightly Textured 2'x2' Ceiling Tile Lab ID-Version‡: 20885946-1

Sample Layers	Asbestos Content
Off-White Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-8, Lightly Textured 2'x2' Ceiling Tile Lab ID-Version‡: 20885947-1

Sample Layers	Asbestos Content
Off-White Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. F

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-9, Lightly Textured 2'x2' Ceiling Tile Lab ID-Version‡: 20885948-1

Sample Layers	Asbestos Content
Off-White Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-10, Gray Mulit-Color Carpet Square and Mastic Lab ID-Version‡: 20885949-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Gray Mulit-Color Carpet Square and Mastic Lab ID-Version‡: 20885950-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Gray Mulit-Color Carpet Square and Mastic Lab ID-Version‡: 20885951-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. F

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-13, Orange Peel D.W. (paint, tex, tape, j.c, d.w.) Lab ID-Version‡: 20885952-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-14, Orange Peel D.W. (paint, tex, tape, j.c, d.w.) Lab ID-Version‡: 20885953-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-15, Orange Peel D.W. (paint, tex, tape, j.c, d.w.) Lab ID-Version‡: 20885954-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. F

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Renee Luna-Trepczynski

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

004180262

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.56		
Project Description:	Kyrene Centennial Middle School - Bldg F		
Project Zip Code:		Sampling Date/Time:	8/4/2025
PO Number:	16807	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	New 2' X 2' Ceiling Tile	B	STD		
PLM 4-6	Old 2' X 2' Ceiling Tile	B	STD		
PLM 7-9	Lightly Textured 2' X 2' Ceiling Tile	B	STD		
PLM 10-12	Gray Multi-Color Carpet Square and Mastic	B	STD		
PLM 13-15	Orange Peel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD		

SERVICES

SAMPLE ID	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Qualitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + *Asp.* spp.)	Culturable Air Fungi (Genus ID + *Asp.* spp.)	Gram Stain and Counts (Culturable Air and Surface Bacteria	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3														X			
PLM 4-6														X			
PLM 7-9														X			
PLM 10-12														X			
PLM 13-15														X			

Other Requests

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME
Nick Marcos	8/8/2025

RECEIVED BY	DATE & TIME
Perla Lugo	8/8/25 2:40pm.

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.56; Kyrene Centennial Middle School - Bldg. G
EML ID: 4180256

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 08-12-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. G

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, Lightly Textured 2'x2' Ceiling Tile Lab ID-Version‡: 20885984-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	80% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-2, Lightly Textured 2'x2' Ceiling Tile Lab ID-Version‡: 20885985-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	80% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-3, Lightly Textured 2'x2' Ceiling Tile Lab ID-Version‡: 20885986-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	80% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-4, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885987-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. G

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-5, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885988-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-6, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885989-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Old 2'x2 Ceiling Tile Lab ID-Version‡: 20885990-1

Sample Layers	Asbestos Content
Tan Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-8, Old 2'x2 Ceiling Tile Lab ID-Version‡: 20885991-1

Sample Layers	Asbestos Content
Tan Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. G

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-9, Old 2'x2 Ceiling Tile

Lab ID-Version‡: 20885992-1

Sample Layers	Asbestos Content
Tan Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-10, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20885993-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20885994-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20885995-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. G

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-13, Orange Peel D.W. (paint, text, tape, j.c., d.w.) Lab ID-Version‡: 20885996-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-14, Orange Peel D.W. (paint, text, tape, j.c., d.w.) Lab ID-Version‡: 20885997-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-15, Orange Peel D.W. (paint, text, tape, j.c., d.w.) Lab ID-Version‡: 20885998-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. G

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Shelby Brown

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

004180256

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.56		
Project Description:	Kyrene Centennial Middle School - Bldg G		
Project Zip Code:		Sampling Date/Time:	8/4/2025
PO Number:	16806	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quatitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp. spp.)	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and Surface Bacteria	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3	Lightly Textured 2' X 2' Ceiling Tile	B	STD																X			
PLM 4-6	New 2' X 2' Ceiling Tile	B	STD																X			
PLM 7-9	Old 2' X 2' Ceiling Tile	B	STD																X			
PLM 10-12	Gray Multi-Color Carpet Square and Mastic	B	STD																X			
PLM 13-15	Orange Peel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD																X			

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME
Nick Marcos	8/8/2025

RECEIVED BY	DATE & TIME
Paula Lego	8/8/25 2:40pm

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Tracey Carpenter
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.11; Centenial - Bldg H
EML ID: 3571465

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 03-13-2024

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg H

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Total Samples Submitted:	9
Total Samples Analyzed:	9
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM1, Orange Peel Drywall System (Paint, Texture, Tape, Joint Comp. + Drywall)

Lab ID-Version‡: 17454100-1

Sample Layers	Asbestos Content
Multicolored Paint Layers	ND
White Texture	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	10% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM2, Orange Peel Drywall System (Paint, Texture, Tape, Joint Comp. + Drywall)

Lab ID-Version‡: 17454101-1

Sample Layers	Asbestos Content
Multicolored Paint Layers	ND
White Texture	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	10% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM3, Orange Peel Drywall System (Paint, Texture, Tape, Joint Comp. + Drywall)

Lab ID-Version‡: 17454102-1

Sample Layers	Asbestos Content
Multicolored Paint Layers	ND
White Texture	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	10% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg H

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM4, Tac Board

Lab ID-Version‡: 17454103-1

Sample Layers	Asbestos Content
Brown Fiberboard with Multicolored Surface	ND
Composite Non-Asbestos Content:	70% Cellulose
Sample Composite Homogeneity:	Good

Location: PLM5, Tac Board

Lab ID-Version‡: 17454104-1

Sample Layers	Asbestos Content
Brown Fiberboard with Multicolored Surface	ND
Composite Non-Asbestos Content:	70% Cellulose
Sample Composite Homogeneity:	Good

Location: PLM6, Tac Board

Lab ID-Version‡: 17454105-1

Sample Layers	Asbestos Content
Brown Fiberboard with Multicolored Surface	ND
Composite Non-Asbestos Content:	70% Cellulose
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg H

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM7, White 12"x12" VCT + Mastic Lab ID-Version‡: 17454106-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM8, White 12"x12" VCT + Mastic Lab ID-Version‡: 17454107-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM9, White 12"x12" VCT + Mastic Lab ID-Version‡: 17454108-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins

www.EMLabPK.com

EMLab P&K

Marlton, NJ: 3000 Lincoln Dr E, Ste. A, Marlton, NJ 08053 * (866) 871-1984
Phoenix, AZ: 1501 West Knudsen Drive, Phoenix, AZ 85027 * (800) 651-4802
SSF, CA: 6000 Shoreline Ct, Ste. 205, S. San Francisco, CA 94080 * (866) 888-6653

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address: 20045 N. 19th Ave, Bldg 7, Phoenix, AZ 85027	
Contact:	Tracey Carpenter	Special Instructions: email results: tcarpenter@dominion-env.com	
Phone:	(602) 989-9992		

PROJECT INFORMATION

Project ID:	AZ1418.11		
Project Description:	Centenial - Bldg H		
Project Zip Code:	85044	Sampling Date/Time:	3/12/24 @ 12pm
PO Number:	316026	Sampled By:	TLC

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

REQUESTED SERVICES

Non-Culturable: Spore Trap Analysis; Other biological particles - supplement; Direct Microscopic Exam (Qualitative); Quantitative spore count direct exam; Dust Characterization

Culturable: Spore Tape, BioCassette™ Andersen SAS, Soil,

1-Media Surface Fungi (Genus ID + *Asp.* sp.); Culturable Air Fungi (Genus ID + *Asp.* spp.); Gram Stain and Counts (Culturable Air and Surface); *Legionella* culture; Total Coliform, *E.coli* (Presence/Absence); QuantiTray-Sewage Screen; OTHER: (please specify test)

Other Requests: Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400); Asbestos Bulk - PLM (EPA method 600/R-93-116); Lead (Pb); PCR (please specify test); Allergens (please specify test)

003571465

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Asbestos Bulk - PLM (EPA method 600/R-93-116)
PLM 1-3	Orange Peel Drywall System (paint, texture, tape, joint comp. + drywall)	B	STD			X
PLM 4-6	Tac Board	B	STD			X
PLM 7-9	White 12" x 12" VCT + Mastic	B	STD			X

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Tracey Carpenter	3/13/24 @ 8AM	Kelley Lugo	3/13/24 8:10am

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.56; Kyrene Centennial Middle School - Bldg. H
EML ID: 4180260

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 08-12-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. H

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885963-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Glass Fibers 10% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-2, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885964-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Glass Fibers 10% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-3, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885965-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Glass Fibers 10% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-4, Old 2'x2' Ceiling Tile Lab ID-Version‡: 20885966-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	80% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. H

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-5, Old 2'x2' Ceiling Tile Lab ID-Version‡: 20885967-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	80% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-6, Old 2'x2' Ceiling Tile Lab ID-Version‡: 20885968-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	80% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Gray Muli-Color Carpet Square and Mastic Lab ID-Version‡: 20885969-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Green Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-8, Gray Muli-Color Carpet Square and Mastic Lab ID-Version‡: 20885970-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Green Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. H

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-9, Gray Muli-Color Carpet Square and Mastic Lab ID-Version‡: 20885971-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Green Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-10, Blue Cove Base and Mastic Lab ID-Version‡: 20885972-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Blue Cove Base and Mastic Lab ID-Version‡: 20885973-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Blue Cove Base and Mastic Lab ID-Version‡: 20885974-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. H

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-13, Orange Peel D.W. (paint, tex, tape, j.c., d.w) Lab ID-Version‡: 20885975-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-14, Orange Peel D.W. (paint, tex, tape, j.c., d.w) Lab ID-Version‡: 20885976-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-15, Orange Peel D.W. (paint, tex, tape, j.c., d.w) Lab ID-Version‡: 20885977-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. H

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Kayla Heinen

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

004180260

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.56		
Project Description:	Kyrene Centennial Middle School - Bldg. H		
Project Zip Code:		Sampling Date/Time:	8/6/2025
PO Number:	16812	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	New 2' X 2' Ceiling Tile	B	STD		
PLM 4-6	Old 2' X 2' Ceiling Tile	B	STD		
PLM 7-9	Gray Multi-Color Carpet Square and Mastic	B	STD		
PLM 10-12	Blue Cove Base and Mastic	B	STD		
PLM 13-15	Orange Peel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD		

SERVICES

	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quatitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp. spp.)	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and Surface Bacteria)	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3														X			
PLM 4-6														X			
PLM 7-9														X			
PLM 10-12														X			
PLM 13-15														X			

Other Requests

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME
Nick Marcos	8/8/2025


RECEIVED BY	DATE & TIME
Patty Lego	8/8/25 2:40pm

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

SECTION 10

♦

ASSUMED ACBM LOCATION MAPS

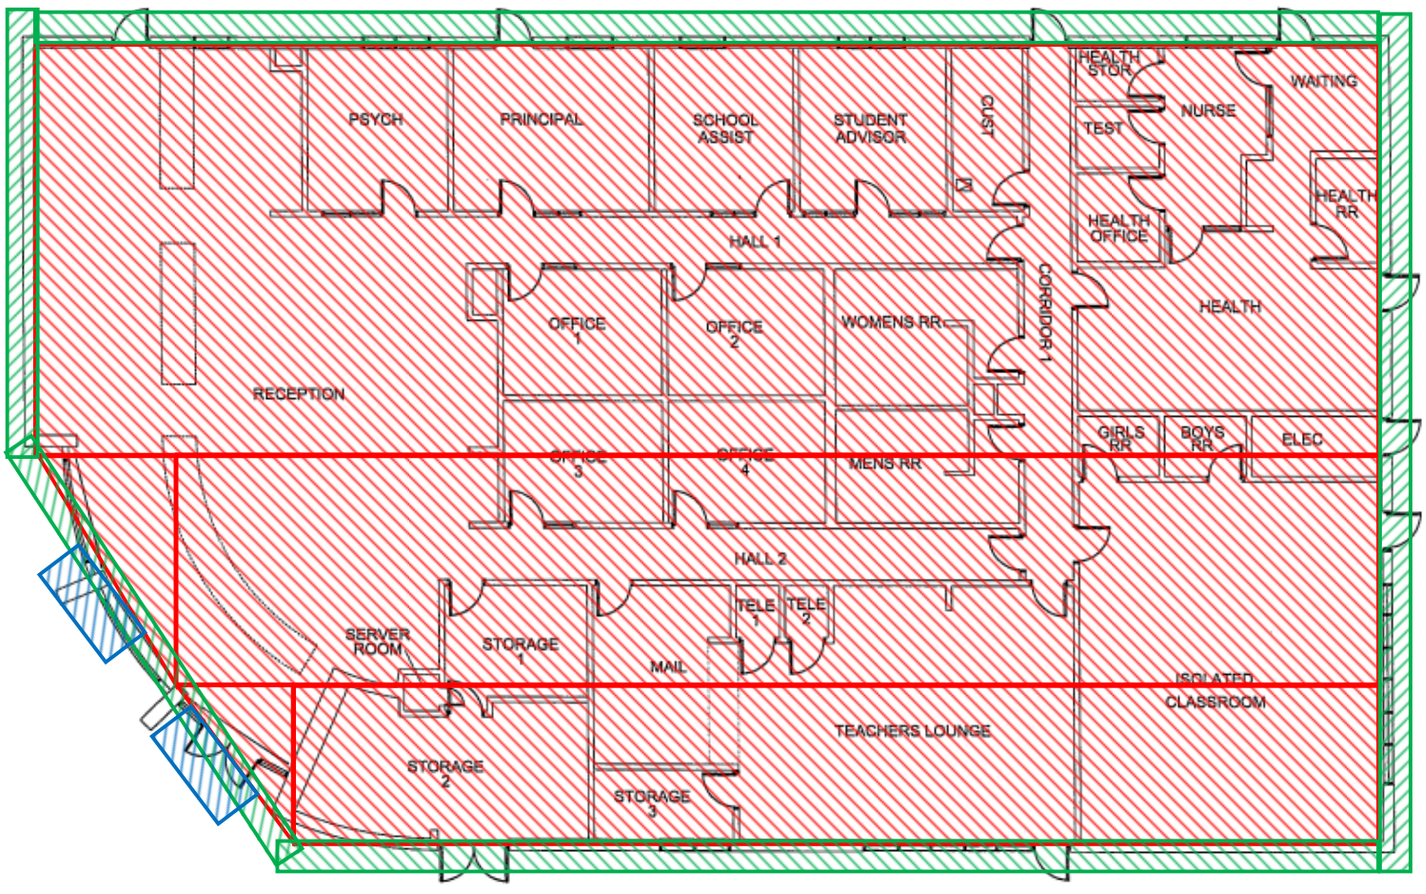

Assumed Asbestos-Containing Black Carpet Square & Mastic Interior/Exterior Caulking Window Glazing

Assumed Asbestos-Containing Brick & Mortar


Assumed Asbestos-Containing Glass Block Mortar

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Admin Building

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

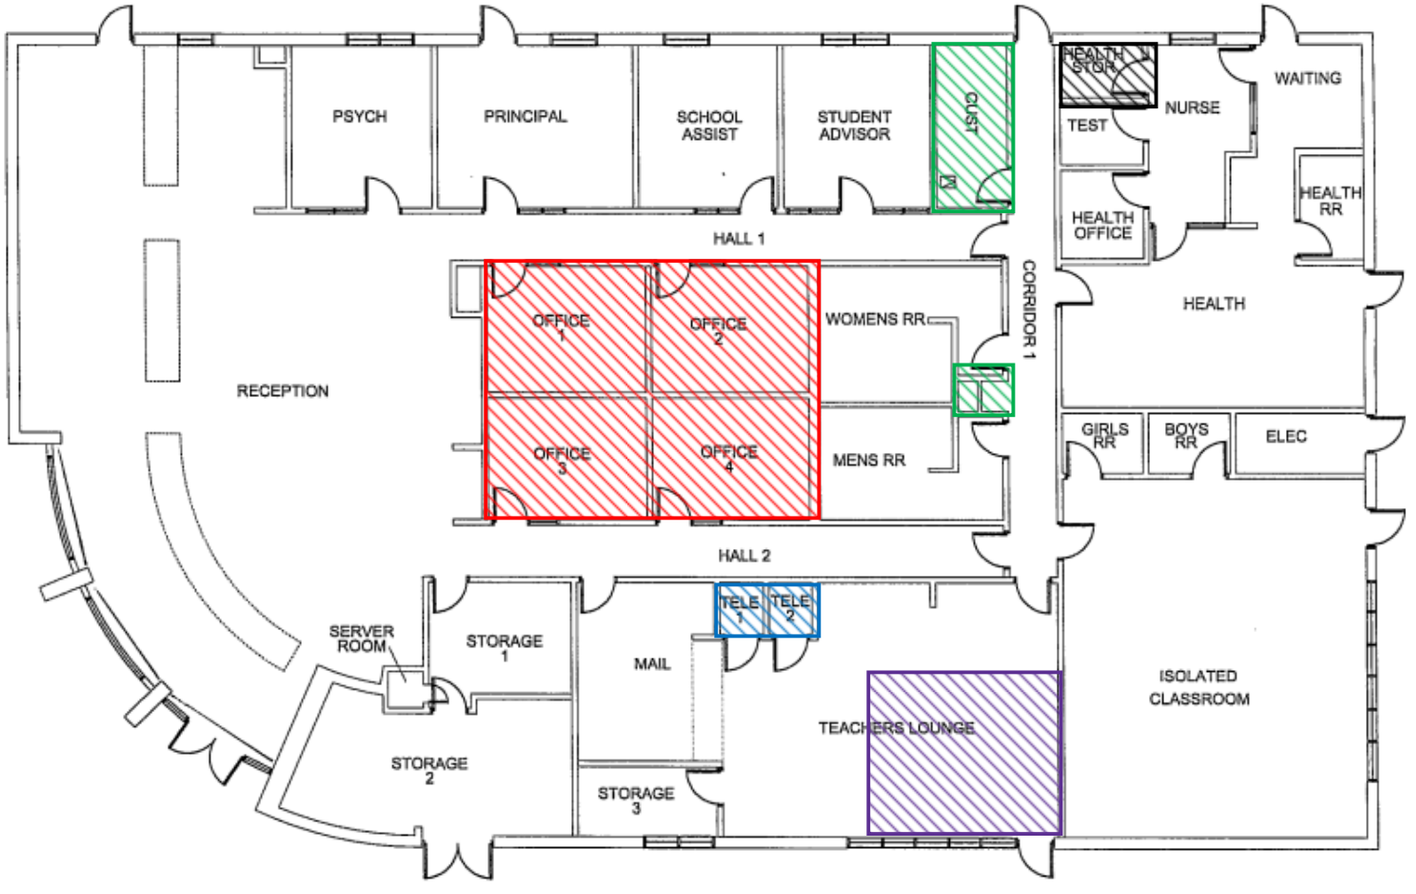

Assumed Asbestos-Containing Tacboard & Mastic

Assumed Asbestos-Containing FRP & Mastic
Brown Cove Base & Mastic
Knockdown Drywall

Assumed Asbestos-Containing Gray Wallpaper

Assumed Asbestos-Containing Black Sink Coating


Assumed Asbestos-Containing Tan Striped Wallpaper

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Admin Building

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

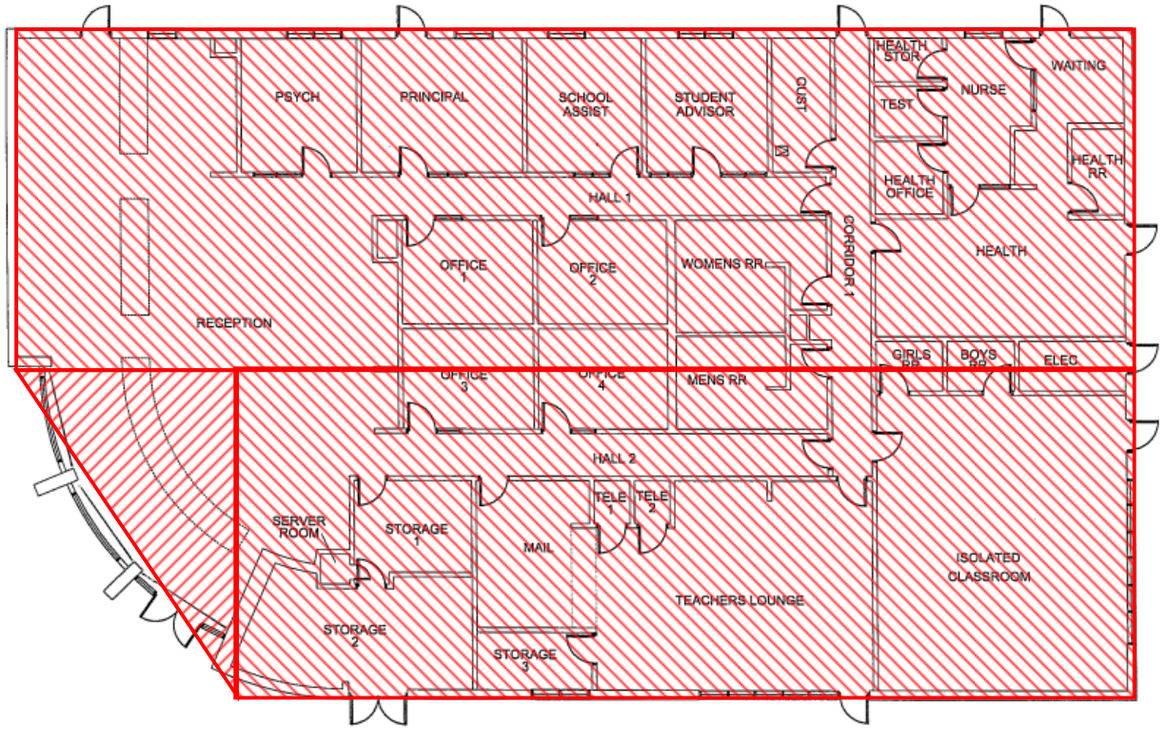


Assumed Asbestos-Containing
Large Pipe Wrap & Mastic
Small Pipe Wrap & Mastic
Black Pipe Insulation Foam
Silver Box Duct Wrap
Silver Duct Wrap
Silver Flex Duct Wrap
White Duct Seam Tape & Mastic
Unfinished Drywall System
Silver Duct Tape

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Admin Building

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

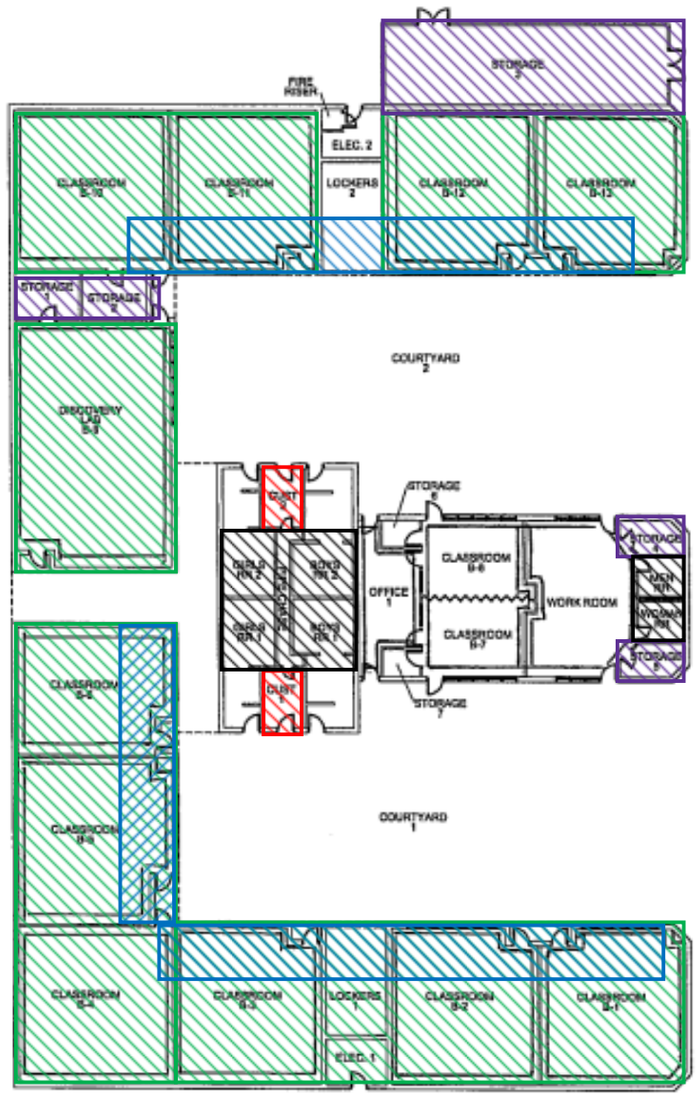

N

Assumed Asbestos-Containing
FRP & Mastic
Brown Cove Base & Mastic

Assumed Asbestos-Containing
Tacboard & Mastic
Black Sink Coating

Assumed Asbestos-Containing
Black Entry Carpet & Mastic

Assumed Asbestos-Containing
White w. Black 12"x 12" VCT
(Mastic)


Assumed Asbestos-Containing
White 2"x2" Ceramic Floor Tile
Peach 2"x2" Ceramic Floor Tile
Blue 2"x2" Ceramic Floor Tile
Off-White 4"x4" Ceramic Floor Tile
Peach 4"x4" Ceramic Floor Tile
(Grout & Thinset)
Fixture Caulking

PLM Sample Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building B

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

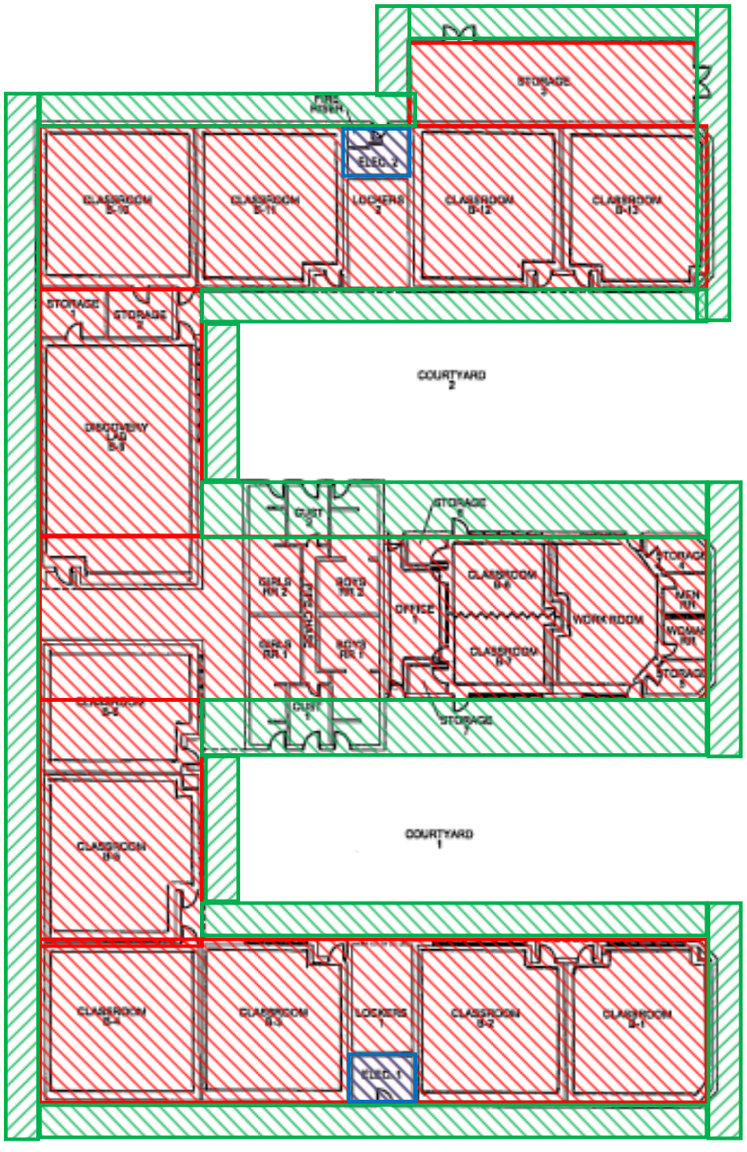

N

Assumed Asbestos-Containing
Silver Box Duct Wrap
Silver Duct Wrap
Silver Flex Duct Wrap
White Duct Tape
Mastic for Duct Tape
Large Pipe Wrap
Mastic for Pipe Wrap
Small Pipe Wrap
Mastic for Pipe Wrap
Unfinished Drywall System
Interior/Exterior Caulking

Assumed Asbestos-Containing
Brick & Mortar
Expansion Joint


Assumed Asbestos-Containing
Knockdown Drywall

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building B

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

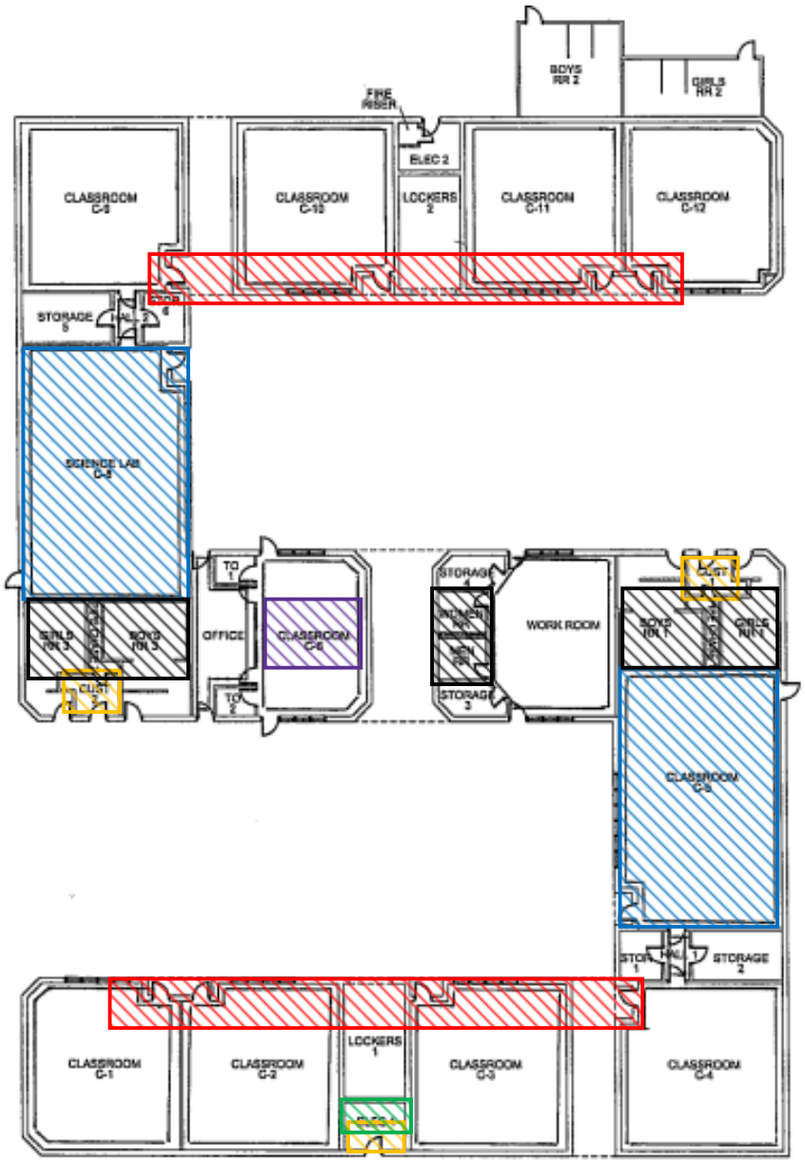

N

Assumed Asbestos-Containing
Black Entry Carpet & Mastic

Assumed Asbestos-Containing
FRP & Mastic
Brown Cove Base & Mastic

Assumed Asbestos-Containing
Knockdown Drywall

Assumed Asbestos-Containing
Black Counter Tops

Assumed Asbestos-Containing Divider Wall


Assumed Asbestos-Containing
White 2" x 2" Ceramic Floor Tile
Peach 2" x 2" Ceramic Floor Tile Blue 2" x 2" Ceramic Floor Tile Off-white 4" x 4" Ceramic Floor Tile Peach 4" x 4" Ceramic Floor Tile
(Grout, Thinset, & Mastic)
Fixture Caulking

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building C

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

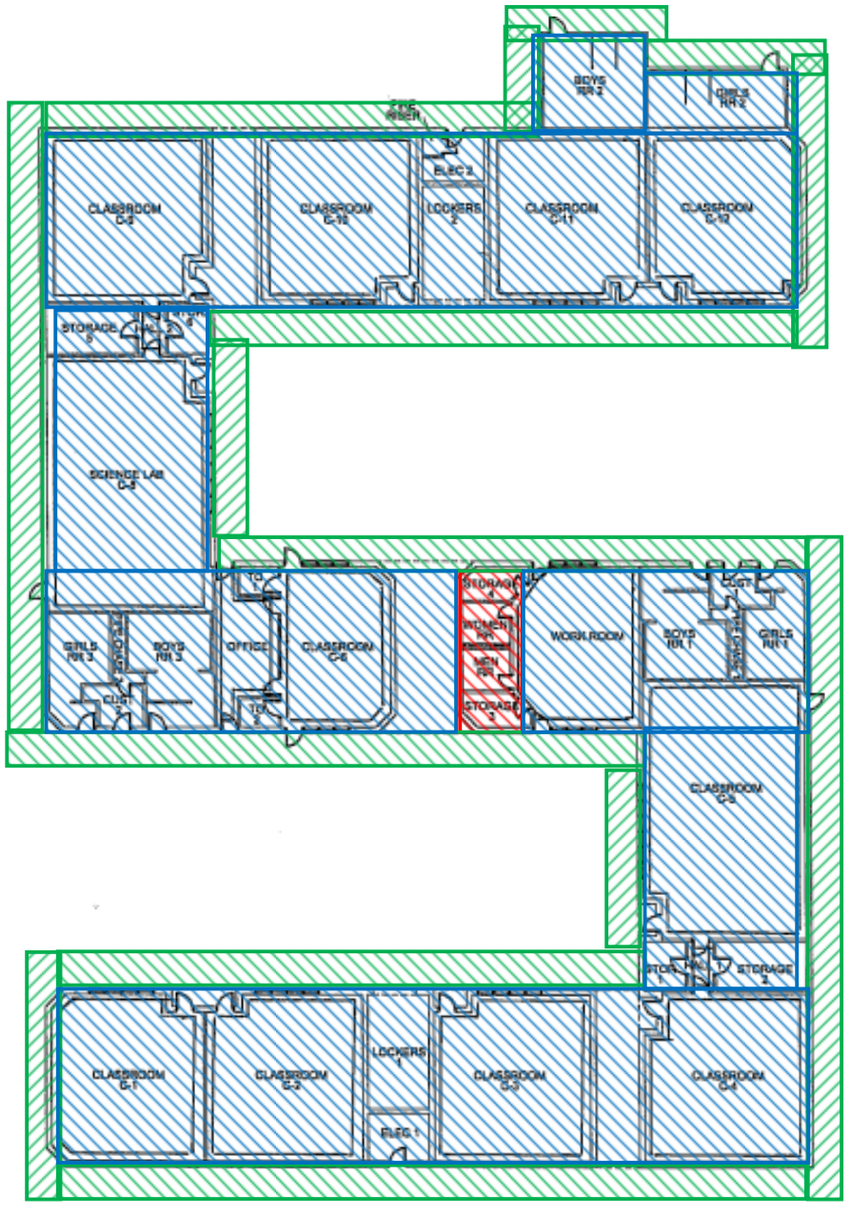

N

Assumed Asbestos-Containing
White w. Black 12" x 12" VCT (Mastic)

Assumed Asbestos-Containing
Brick
Mortar for Brick
Expansion Joint


Assumed Asbestos-Containing
Silver Box Duct Wrap
Silver Duct Wrap
Silver Flex Duct Wrap
White Duct Tape & Mastic
Large Pipe Wrap & Mastic
Small Pipe Wrap & Mastic
Unfinished Drywall System
Interior Caulking
Exterior Caulking
Tacboard & Mastic
Black Sink Coating

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building C

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

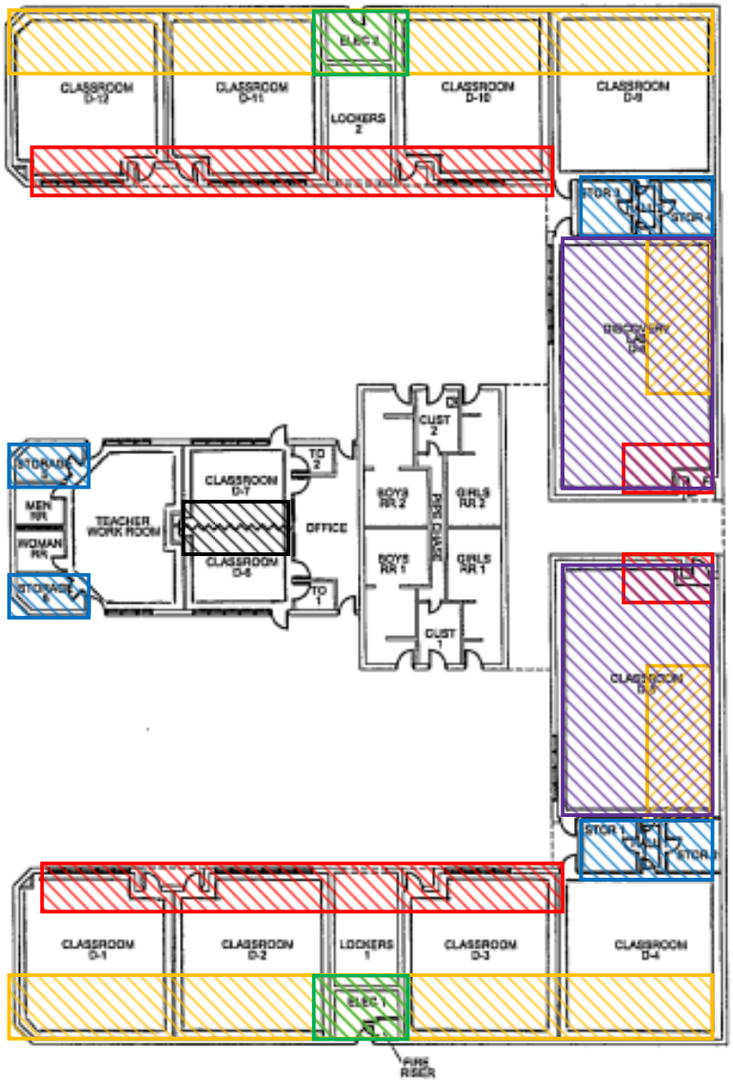

N

Assumed Asbestos-Containing Black Entry Carpet & Mastic

Assumed Asbestos-Containing Black Sink Coating

Assumed Asbestos-Containing Knockdown Drywall

Assumed Asbestos-Containing White w. Black 12" x 12" VCT (Mastic) Brown Cove Base & Mastic

Assumed Asbestos-Containing Black Counter Tops


Assumed Asbestos-Containing Divider Wall

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building D

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

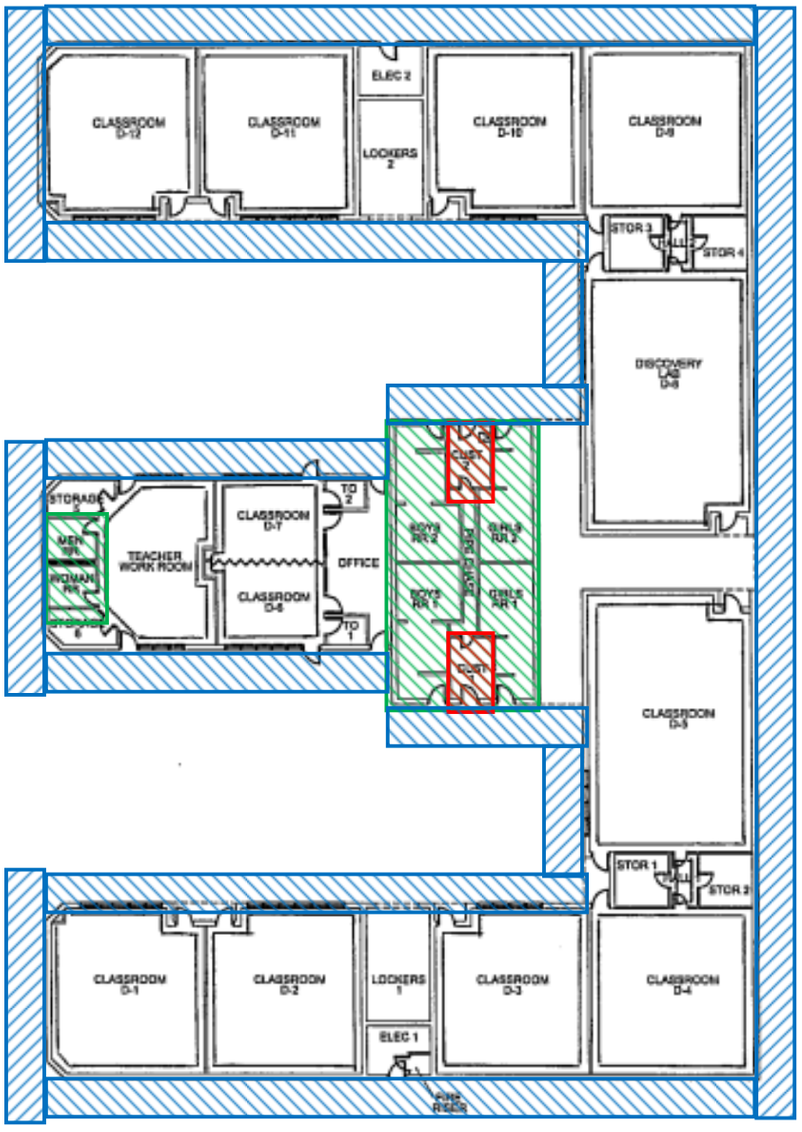

N

Assumed Asbestos-Containing
FRP & Mastic

Assumed Asbestos-Containing
White 2" x 2" Ceramic Floor Tile
Peach 2" x 2" Ceramic Floor Tile
Blue 2" x 2" Ceramic Floor Tile
Off-White 4" x 4" Ceramic Wall Tile
Peach 4" x 4" Ceramic Wall Tile
(Grout, Thinset, & Mastic)
Fixture Caulking


Assumed Asbestos-Containing
Brick & Mortar
Expansion Joint

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building D

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

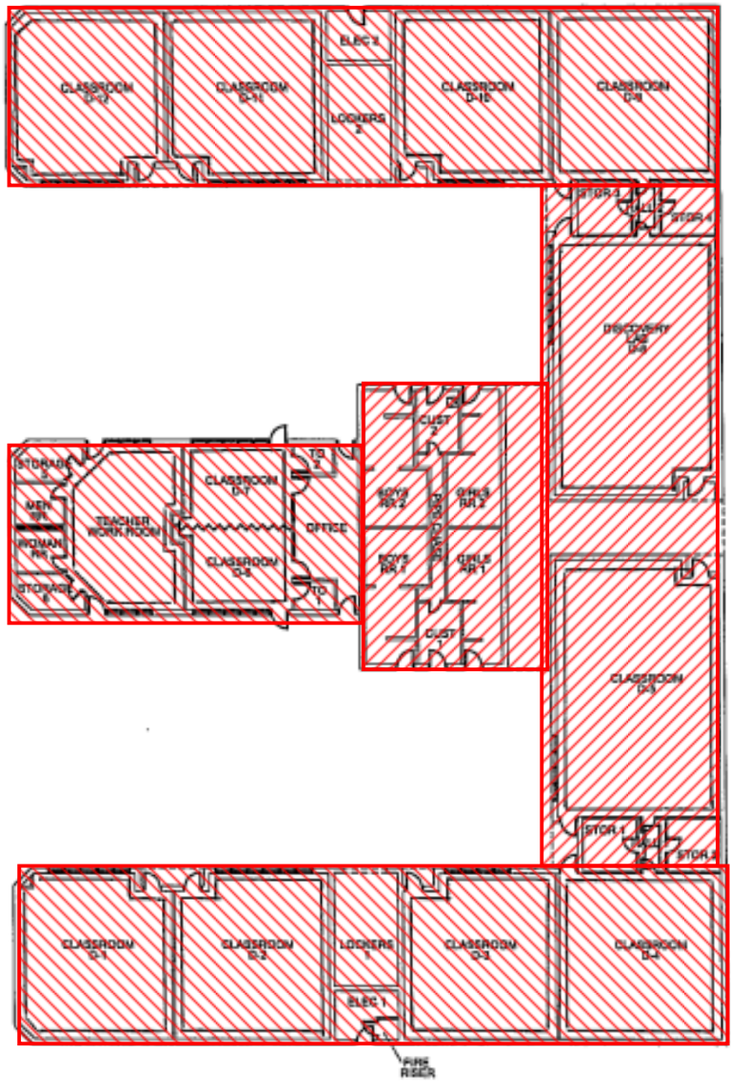

N


Assumed Asbestos-Containing
Silver Box Duct Wrap
Silver Duct Wrap
Silver Flex Duct Wrap
White Duct Tape & Mastic
Large Pipe Wrap & Mastic
Small Pipe Wrap & Mastic
Unfinished Drywall System
Interior/Exterior Caulking

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building D

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

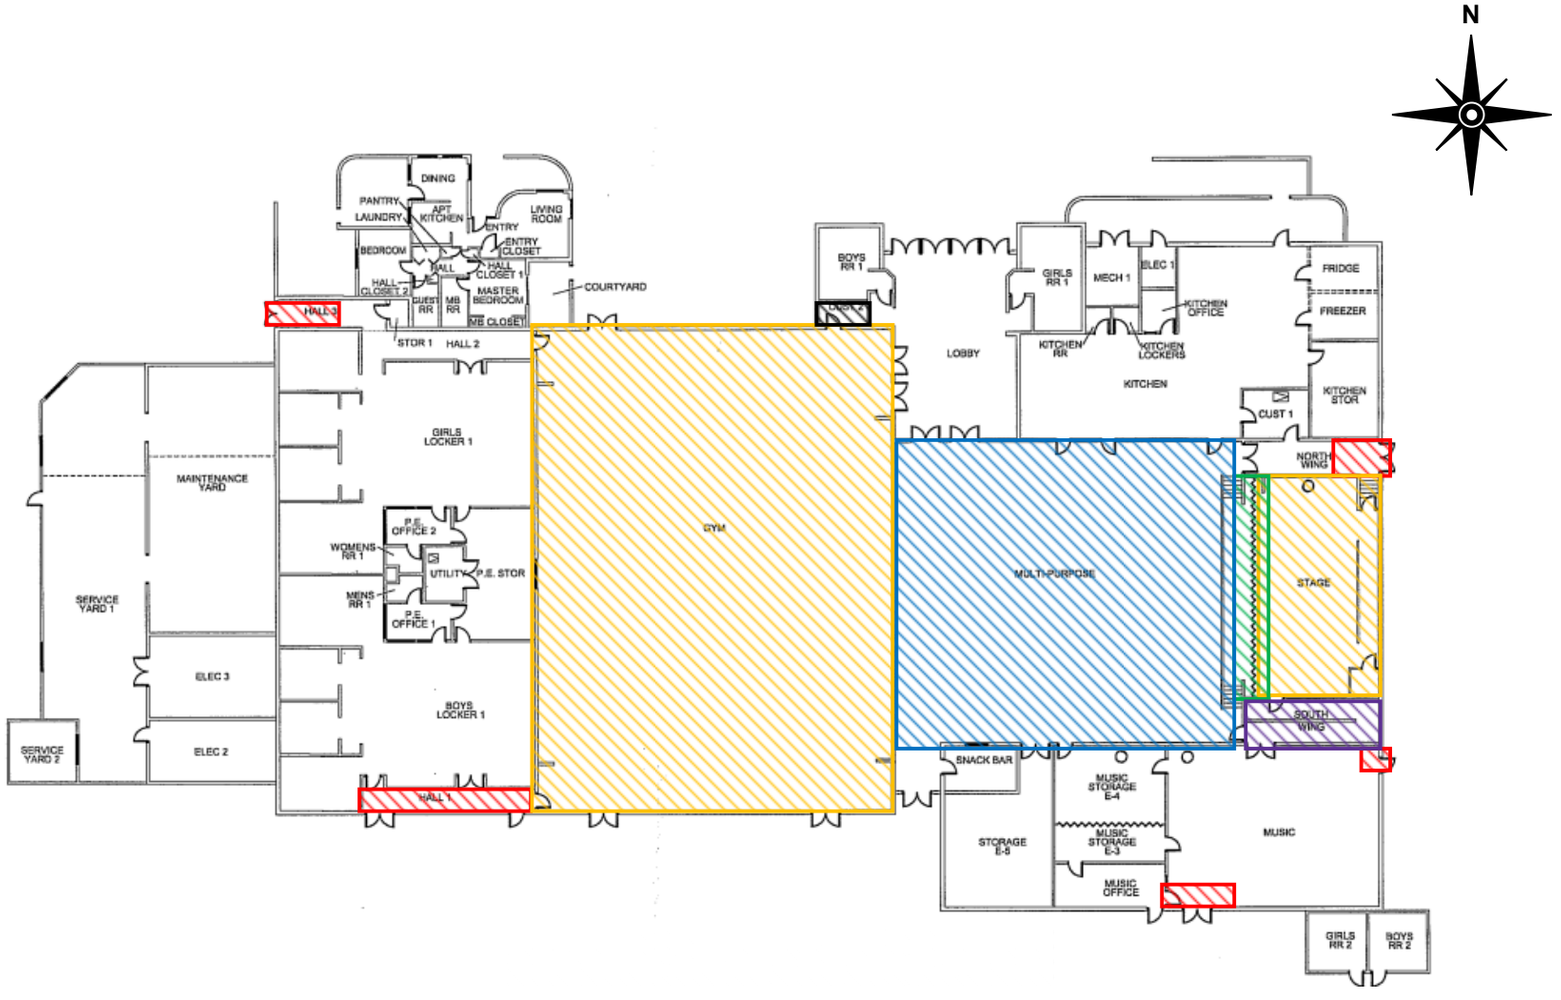

Assumed Asbestos-Containing Black Entry Carpet & Mastic

Assumed Asbestos-Containing Black L Shaped Cove Base (Mastic)

Assumed Asbestos-Containing Divider Wall

Assumed Asbestos-Containing Black 6" Cove Base & Mastic

Assumed Asbestos-Containing Blue 6" Cove Base & Mastic White w/ Gray 12" X 12" VCT (Mastic)


Assumed Asbestos-Containing Gray Speckled 12" x 12" VCT (Mastic)

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building E

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

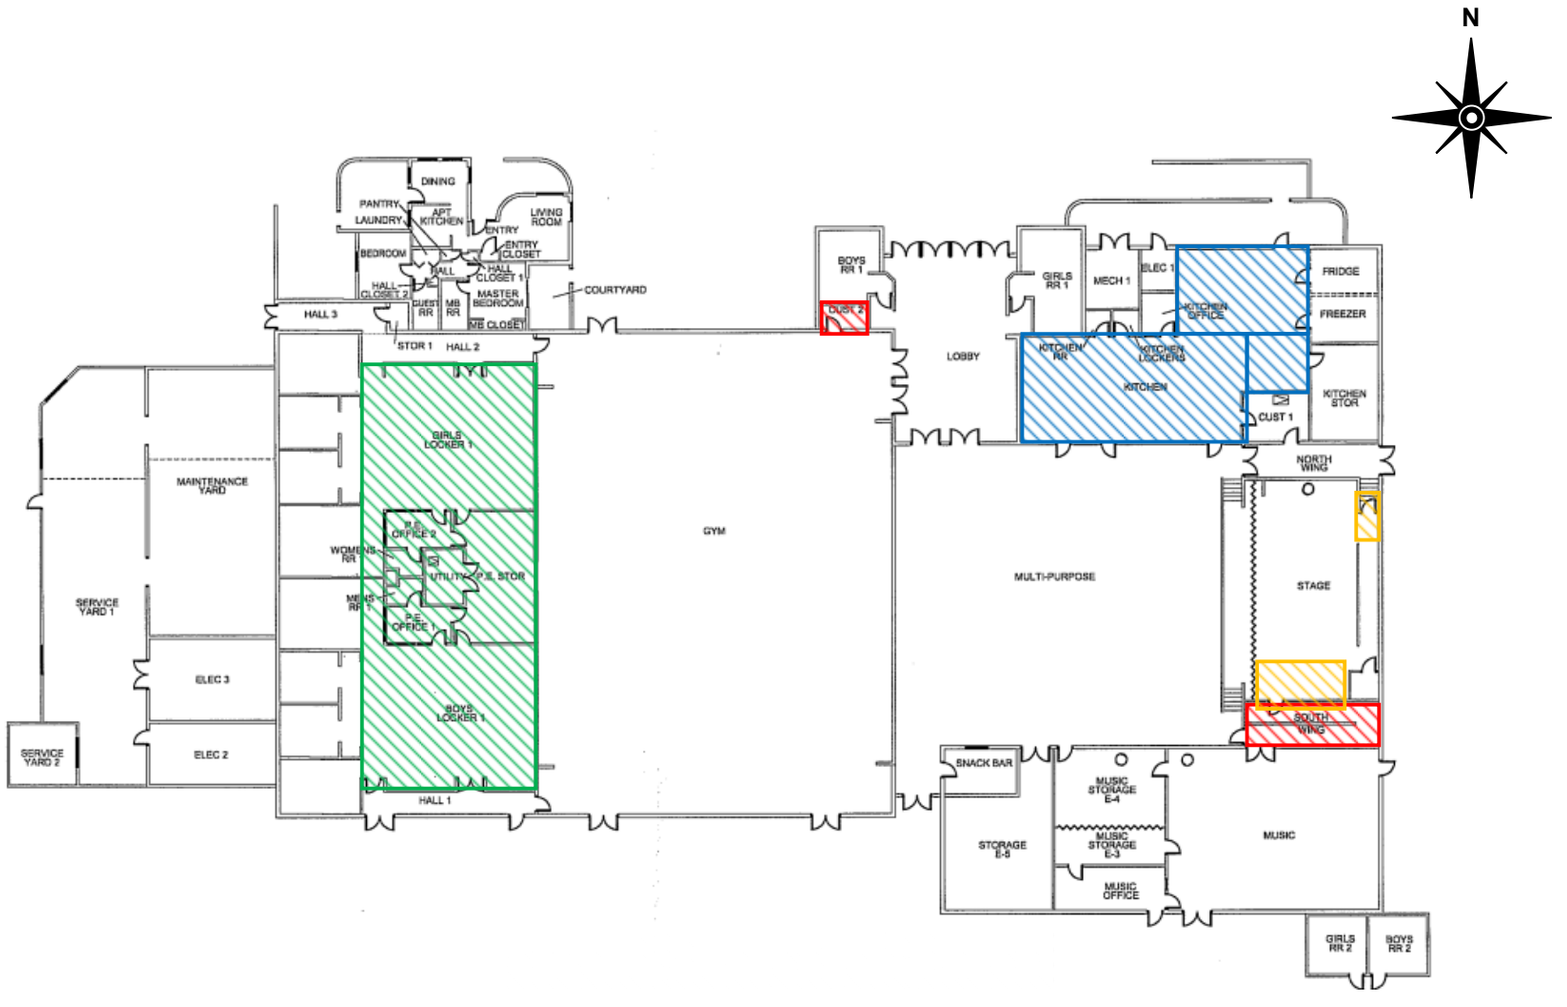

Assumed Asbestos-Containing
Old FRP & Mastic

Assumed Asbestos-Containing
Brown 6" Cove Base & Mastic

Assumed Asbestos-Containing
Brown 4" Cove Base & Mastic


Assumed Asbestos-Containing
New FRP & Mastic
Brown 6" x 6" Ceramic Floor Tile
Brown 4" x 6" Ceramic Cove Base
(Grout, Thinset, and Mastic)
Drywall 2' x 4' Ceiling Tile

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building E

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

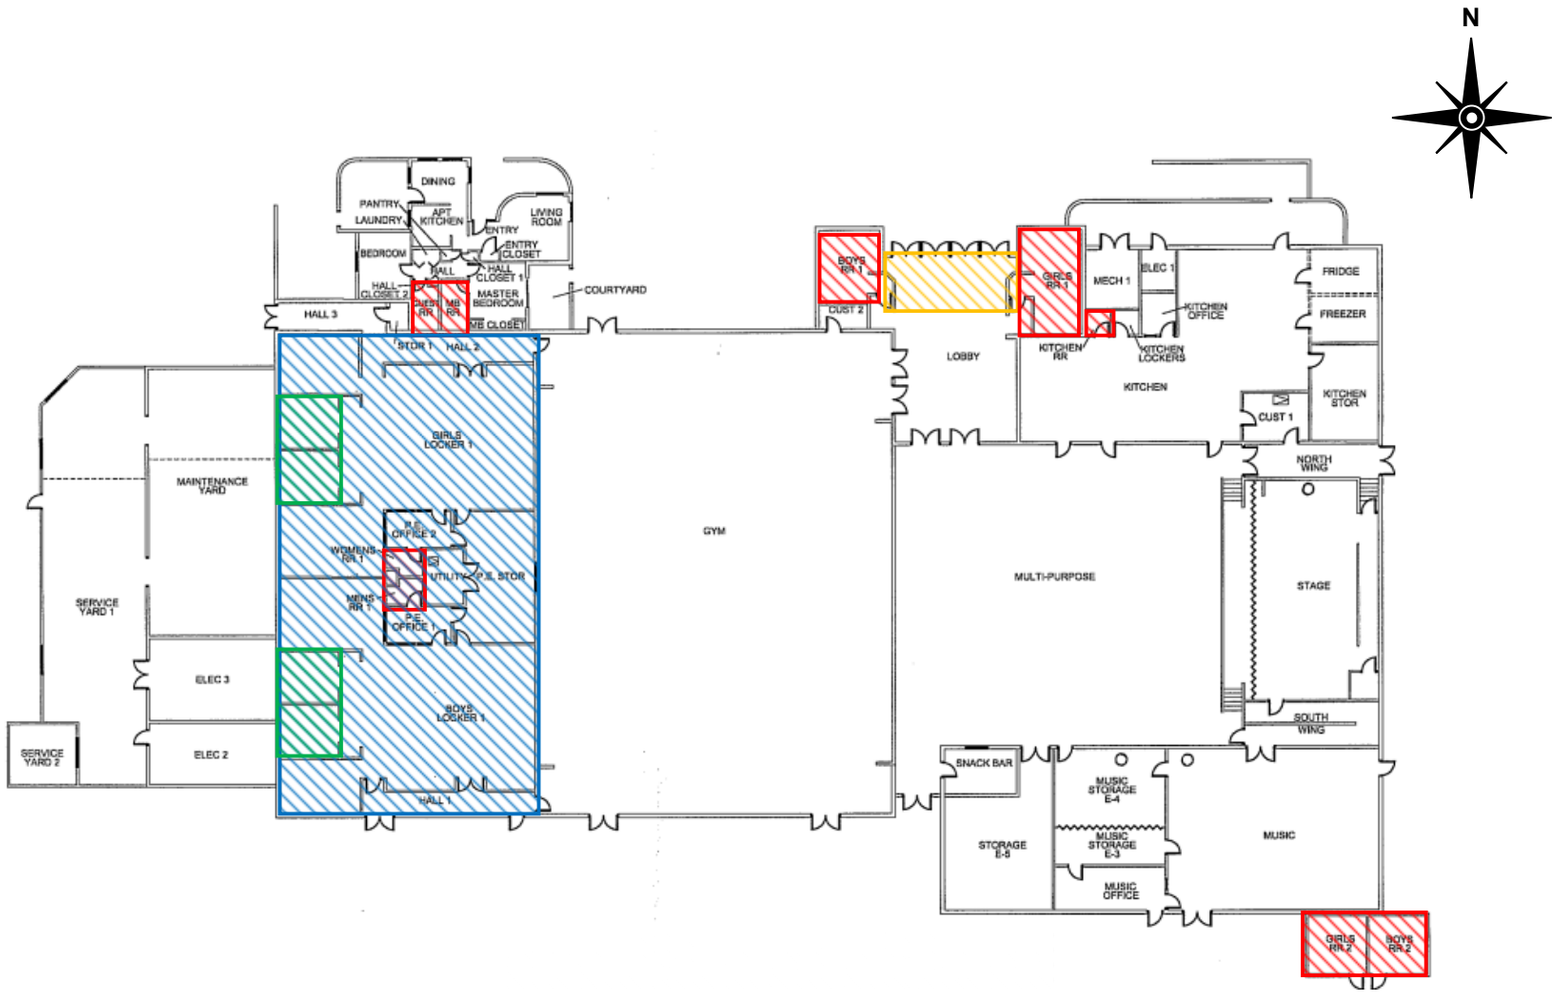

Assumed Asbestos-Containing
Fixture Caulking

Assumed Asbestos-Containing
Glass Block Mortar

Assumed Asbestos-Containing
Gray 6" x 6" Ceramic Floor Tile
(Grout & Thinset)


Assumed Asbestos-Containing
White w. Black 12" x 12" VCT
Black 4" Cove Base
White 4" x 4" Ceramic Wall Tile
Red 4" x 4" Ceramic Wall Tile
Black 4" x 4" Ceramic Wall Tile
Gray Floor Coating
Gray FRP
(Mastic)
Concrete Benches

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building E

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

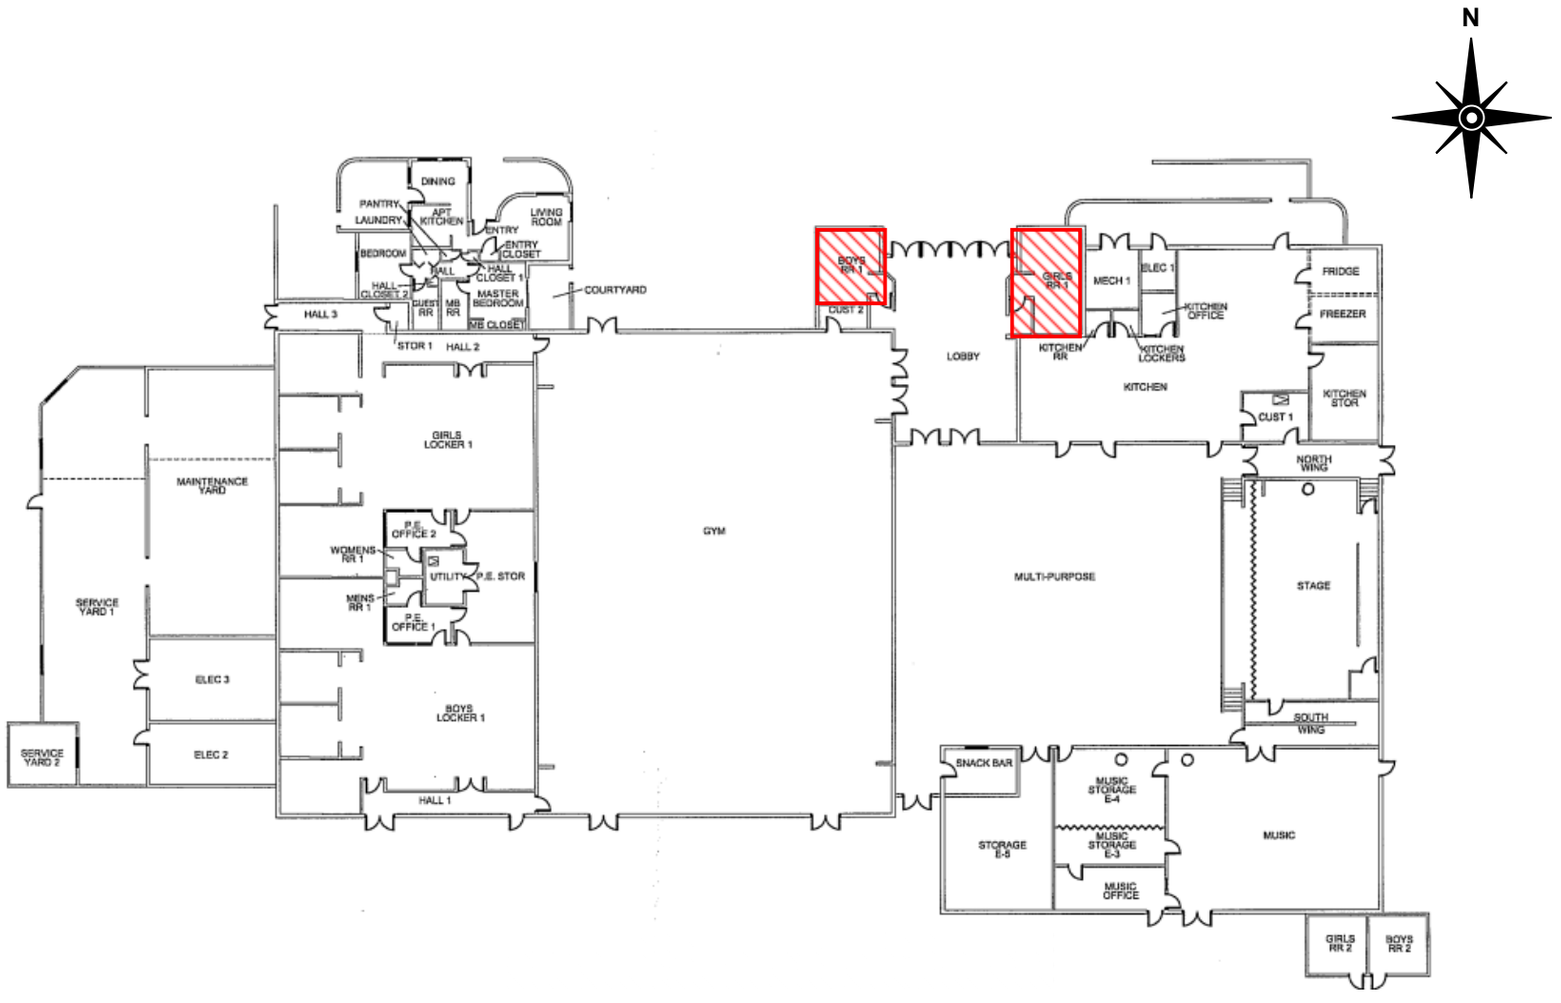


Assumed Asbestos-Containing
Green Speckled 2" x 2" Ceramic Floor Tile
Gray Speckled 2" x 2" Ceramic Floor Tile
Peach 4" x 4" Ceramic Wall Tile
Gray 4" x 4" Ceramic Wall Tile
(Grout & Thinset)

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building E

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

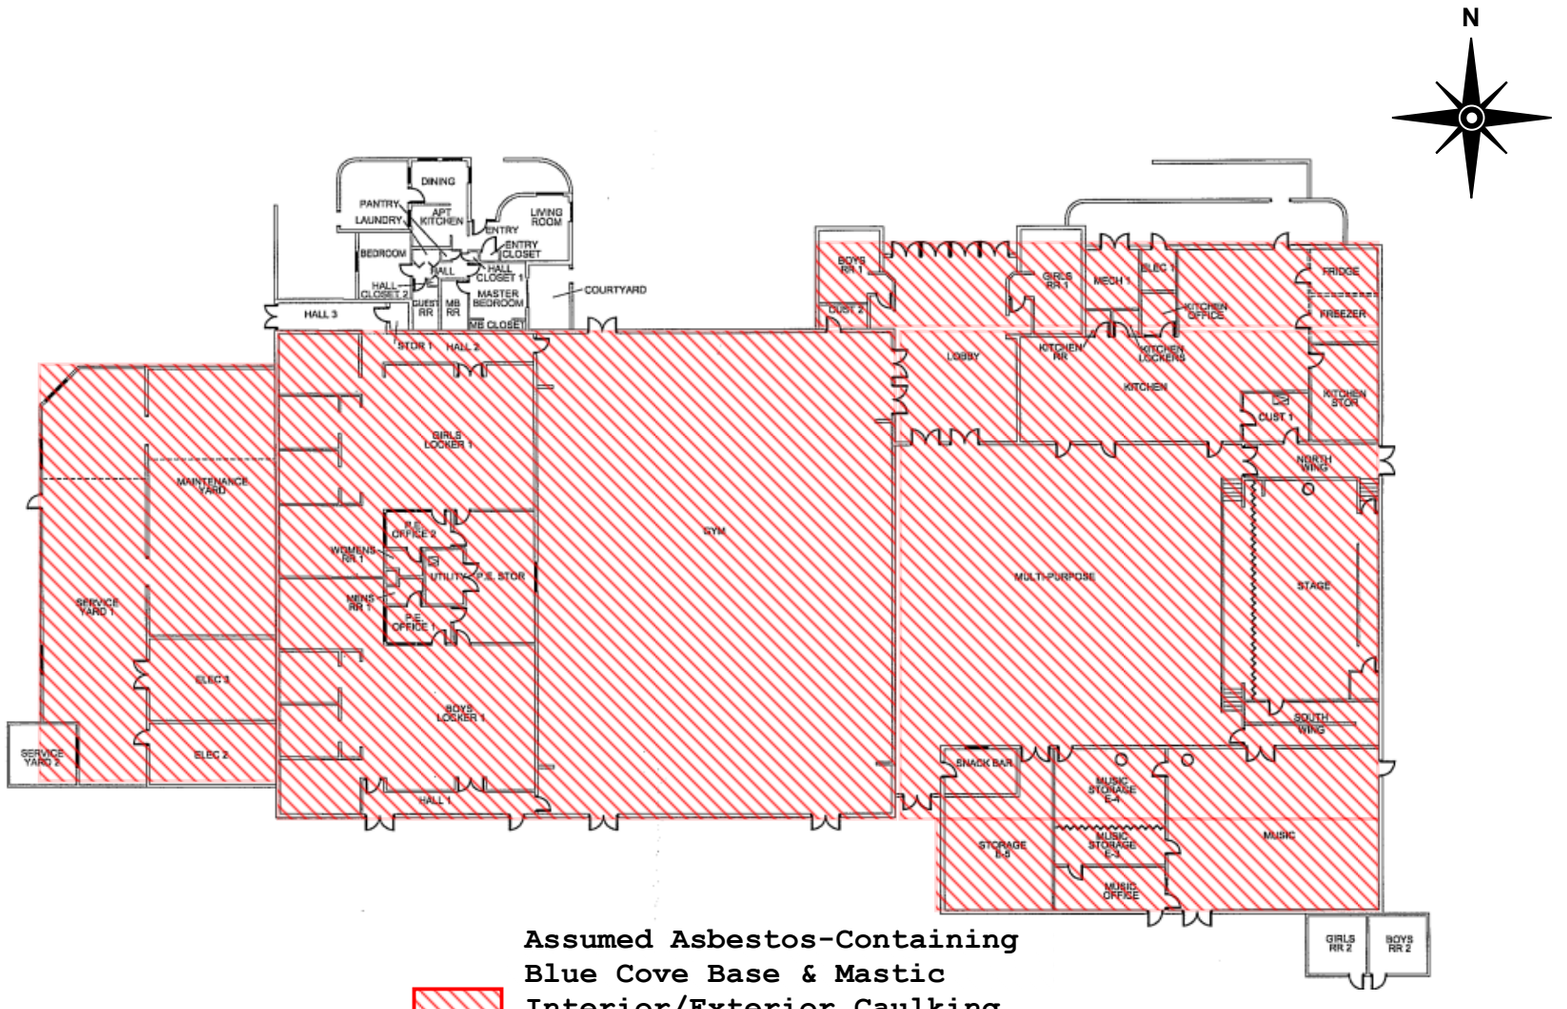


Assumed Asbestos-Containing
Blue Cove Base & Mastic
Interior/Exterior Caulking
Black Window Glazing
Polished Concrete & Expansion Joint
Silver Box Duct Wrap
Silver Duct Wrap
Silver Flex Duct Wrap
White Duct Tape & Mastic
Gray Duct Mastic
Large Pipe Wrap & Mastic
Small Pipe Wrap & Mastic
Unfinished Drywall
Black Sink Coating

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building E

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

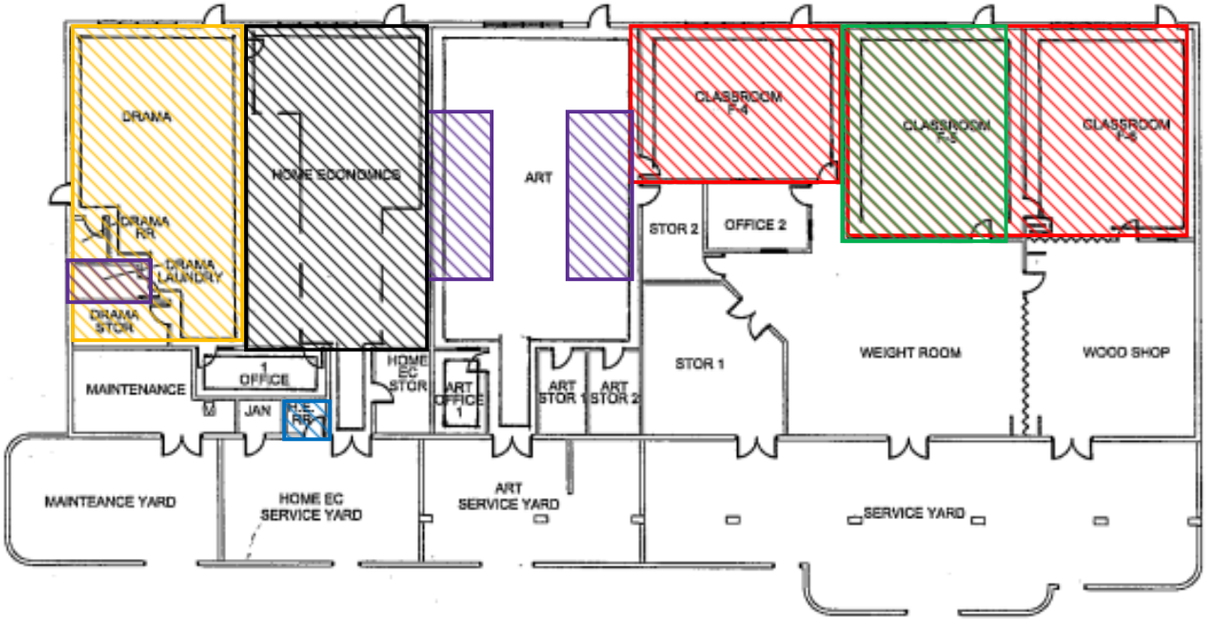

Assumed Asbestos-Containing Blue Cove Base & Mastic Tacboard & Mastic

Assumed Asbestos-Containing White w. Black 12" x 12" VCT Mastic Brown Cove Base & Mastic

Assumed Asbestos-Containing Black Rubber Gym Floor

Assumed Asbestos-Containing Fixture Caulking

Assumed Asbestos-Containing Gray Sink Coating


Assumed Asbestos-Containing Polished Concrete Floor Expansion

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building F

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

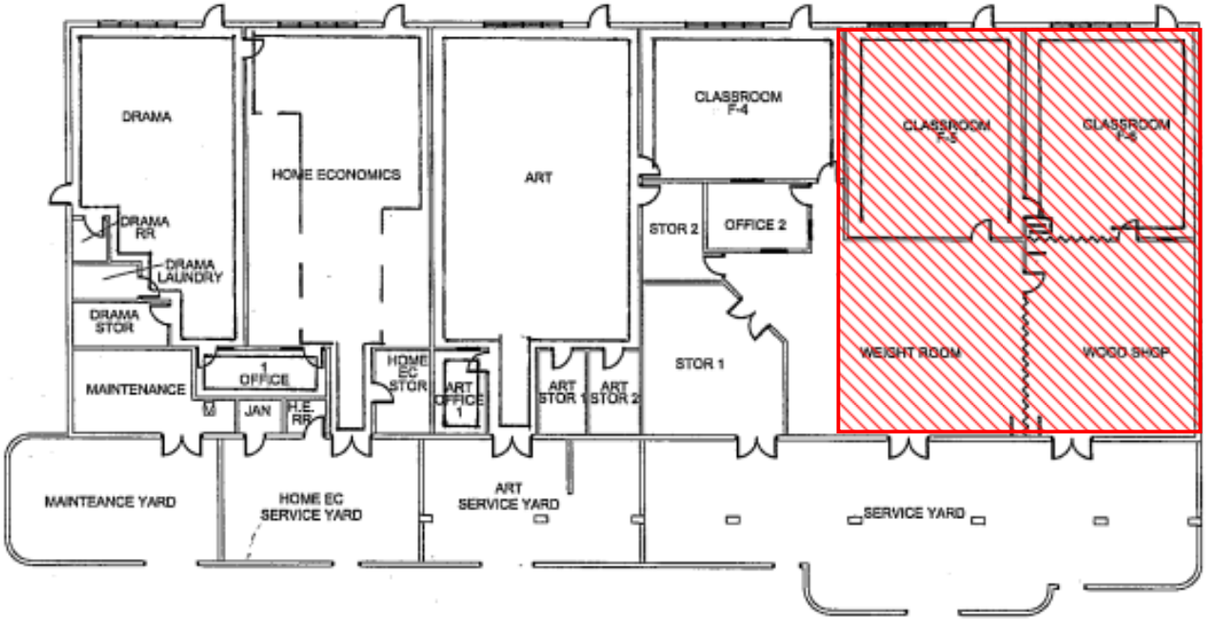

Assumed Asbestos-Containing
Black Cove Base & Mastic
Gray Wood Vinyl Flooring
Divider Wall

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building F

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415




Assumed Asbestos-Containing
Interior/Exterior Caulking
Black Window Glazing
Brick & Mortar
Expansion Joint
Large Pipe Wrap & Mastic
Small Pipe Wrap & Mastic
Black Pipe Foam Insulation
Silver Box Duct Wrap
Silver Duct Wrap
Silver Flex Duct Wrap
White Duct Tape & Mastic
Unfinished Drywall
Silver Duct Tape
Skylight Insulation Panel

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building F

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

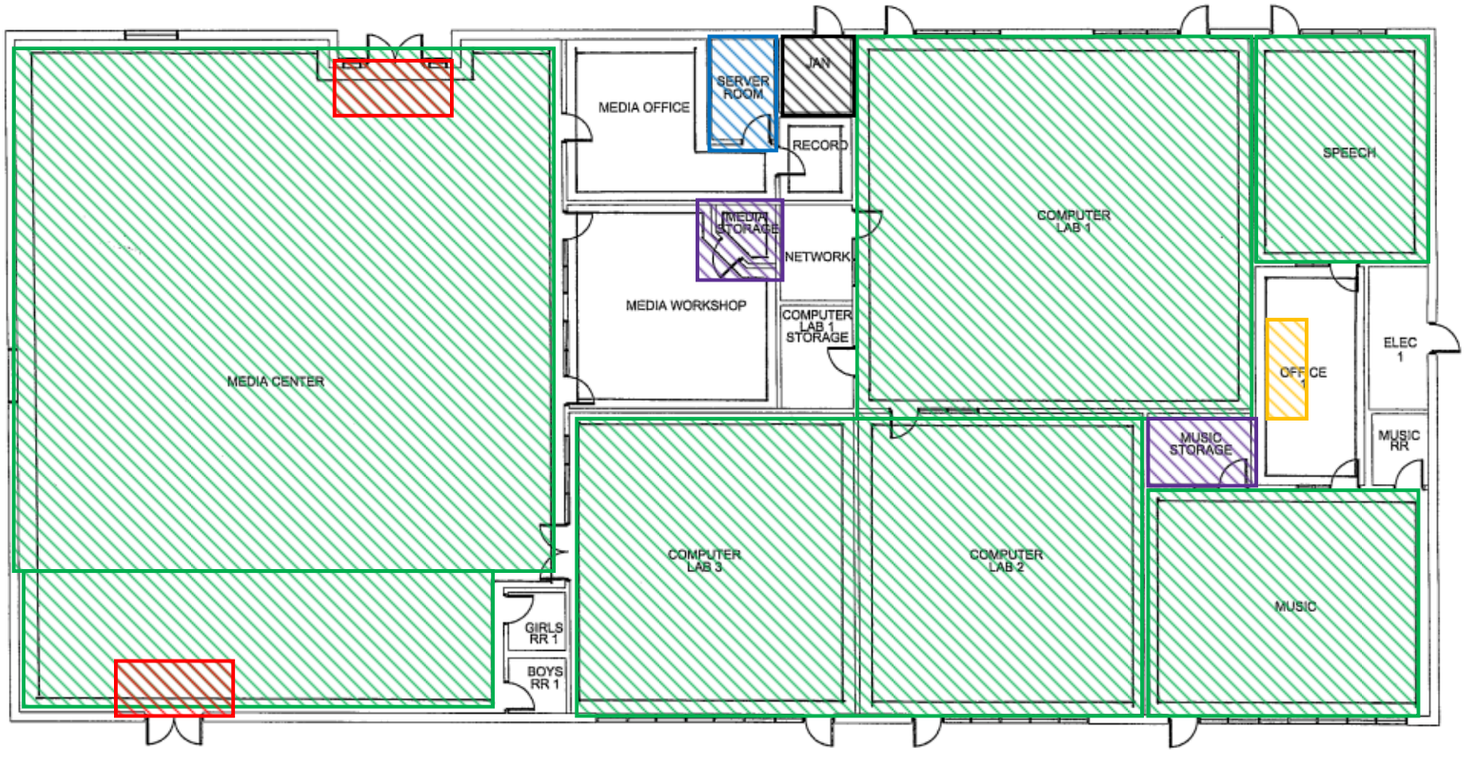

Assumed Asbestos-Containing
Black Entry Carpet
Glass Block Mortar

Assumed Asbestos-Containing
Black Sink Coating

Assumed Asbestos-Containing
Tacboard
Mastic for Tacboard

Assumed Asbestos-Containing
White w. Gray 12" x 12" VCT
(Mastic)

Assumed Asbestos-Containing
Gray Wallpaper
Brown Cove Base & Mastic


Assumed Asbestos-Containing
Knockdown Drywall

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building G

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

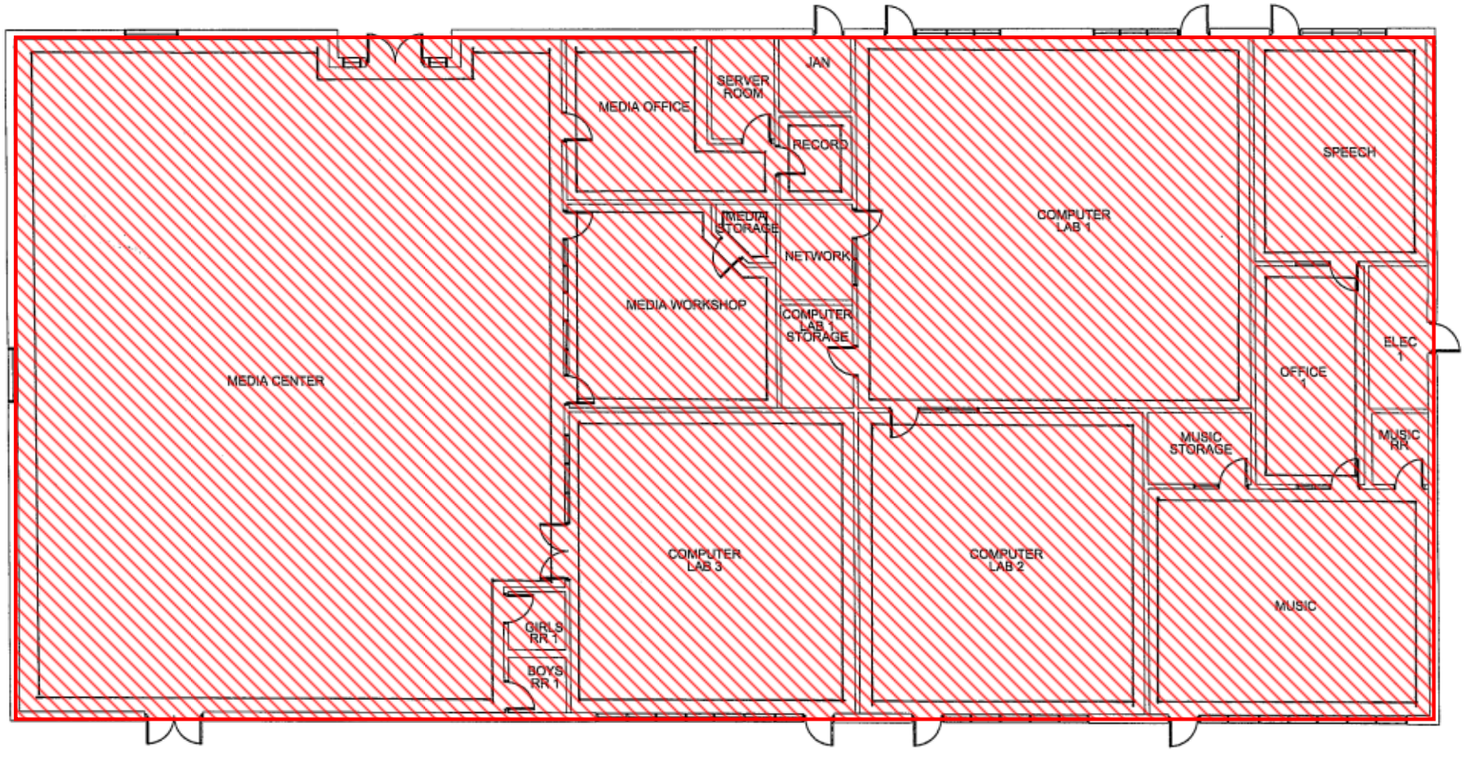


Assumed Asbestos-Containing
Blue Cove Base & Mastic
Interior/Exterior Caulking
Large Pipe Wrap & Mastic
Small Pipe Wrap & Mastic
Black Pipe Foam Insulation
Silver Box Duct Wrap
Silver Duct Wrap
Silver Flex Duct Wrap
White Duct Tape & Mastic
Unfinished Drywall
Silver Duct Tape
Skylight Insulation Panel

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building G

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

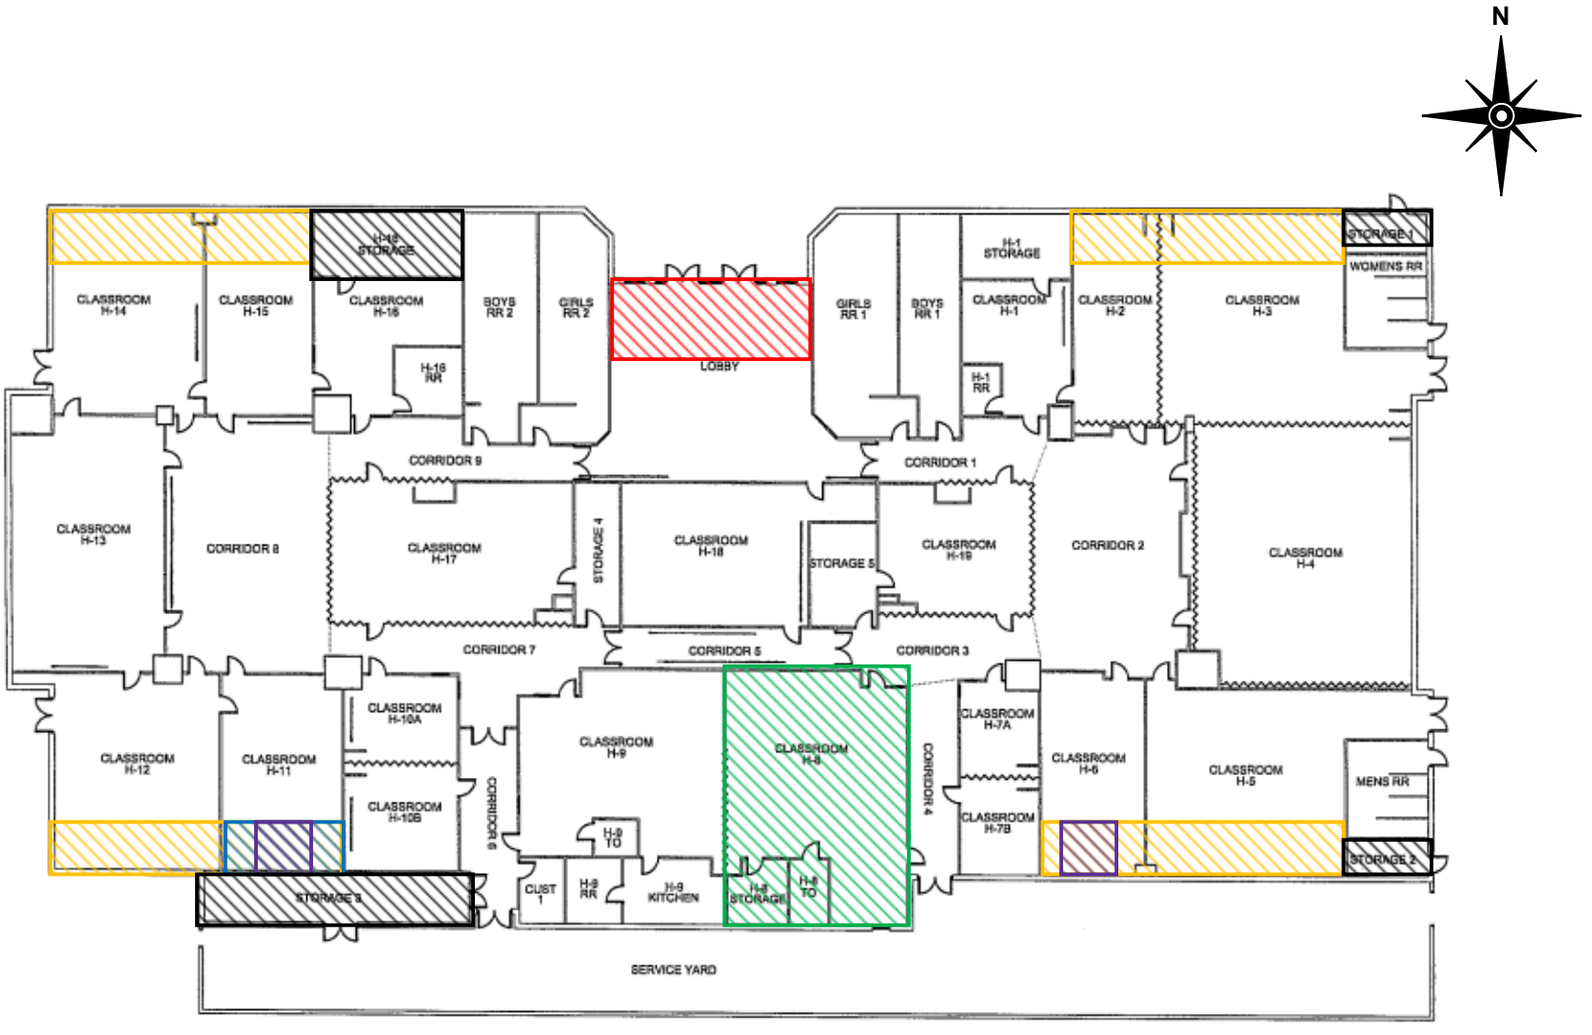

Assumed Asbestos-Containing Black Entry Carpet & Mastic Glass Block Mortar

Assumed Asbestos-Containing Black Sink Coating

Assumed Asbestos-Containing Gray Cove Base & Mastic

Assumed Asbestos-Containing White Sink Coating

Assumed Asbestos-Containing Fume Hood Panel


Assumed Asbestos-Containing Tan Speckled 12" x 12" VCT (Mastic)

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building H

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

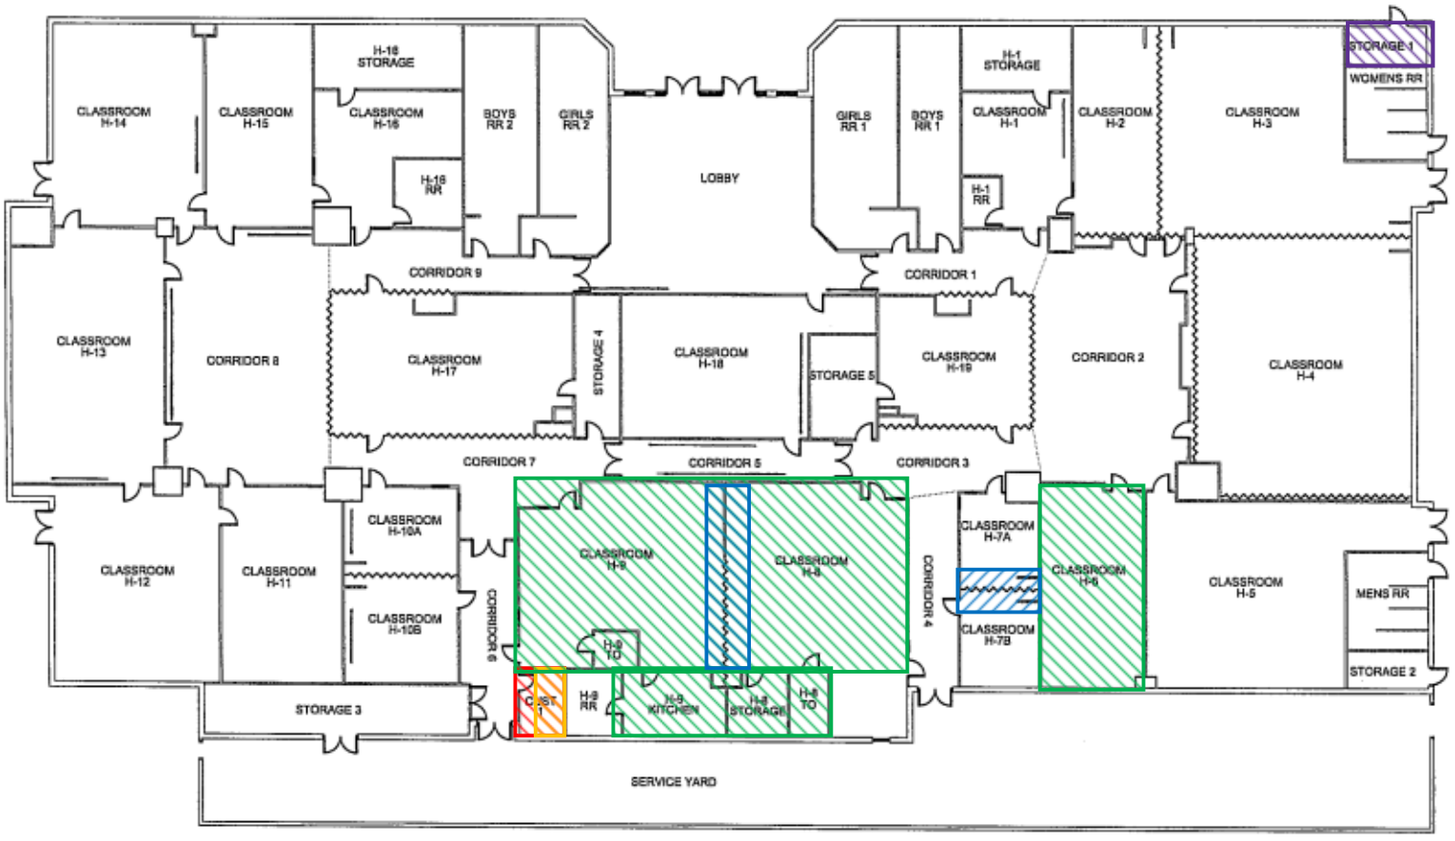

Assumed Asbestos-Containing FRP & Mastic

Assumed Asbestos-Containing Smooth Drywall

Assumed Asbestos-Containing White w. Gray 12" x 12" VCT (Mastic)

Assumed Asbestos-Containing Divider Wall


Assumed Asbestos-Containing Knockdown Drywall

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building H

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

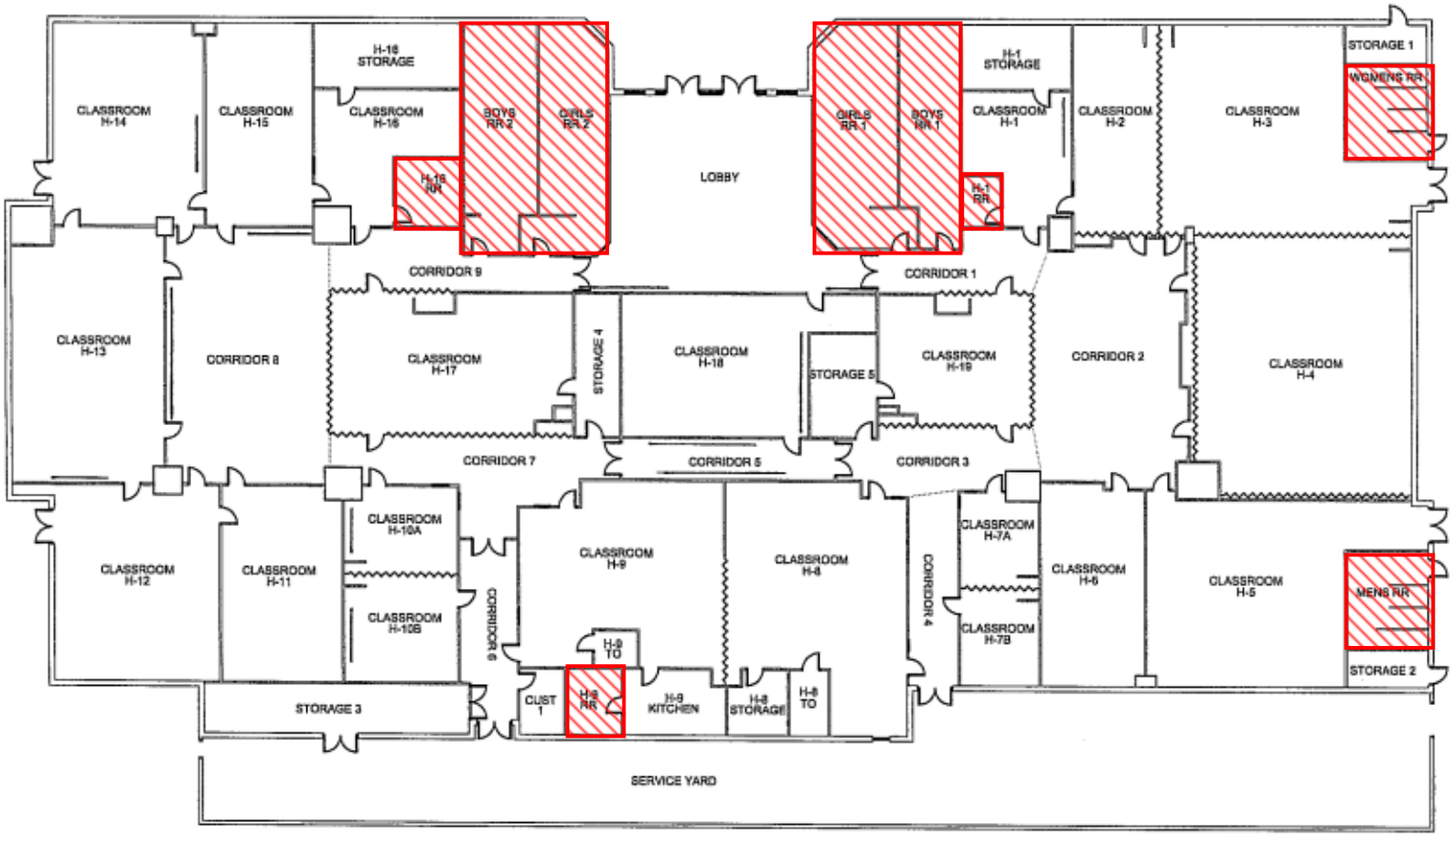


Assumed Asbestos-Containing
Off-White 4" x 4" Ceramic Wall Tile
Peach 4" x 4" Ceramic Wall Tile
Gray 4" x 4" Ceramic Wall Tile
Off-White 2" x 2" Ceramic Floor Tile
Green Speckled 2" x 2" Ceramic Floor Tile
Gray Speckled 2" x 2" Ceramic Floor Tile
(Grout, Thinset, & Mastic)
Fixture Caulking

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building H

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

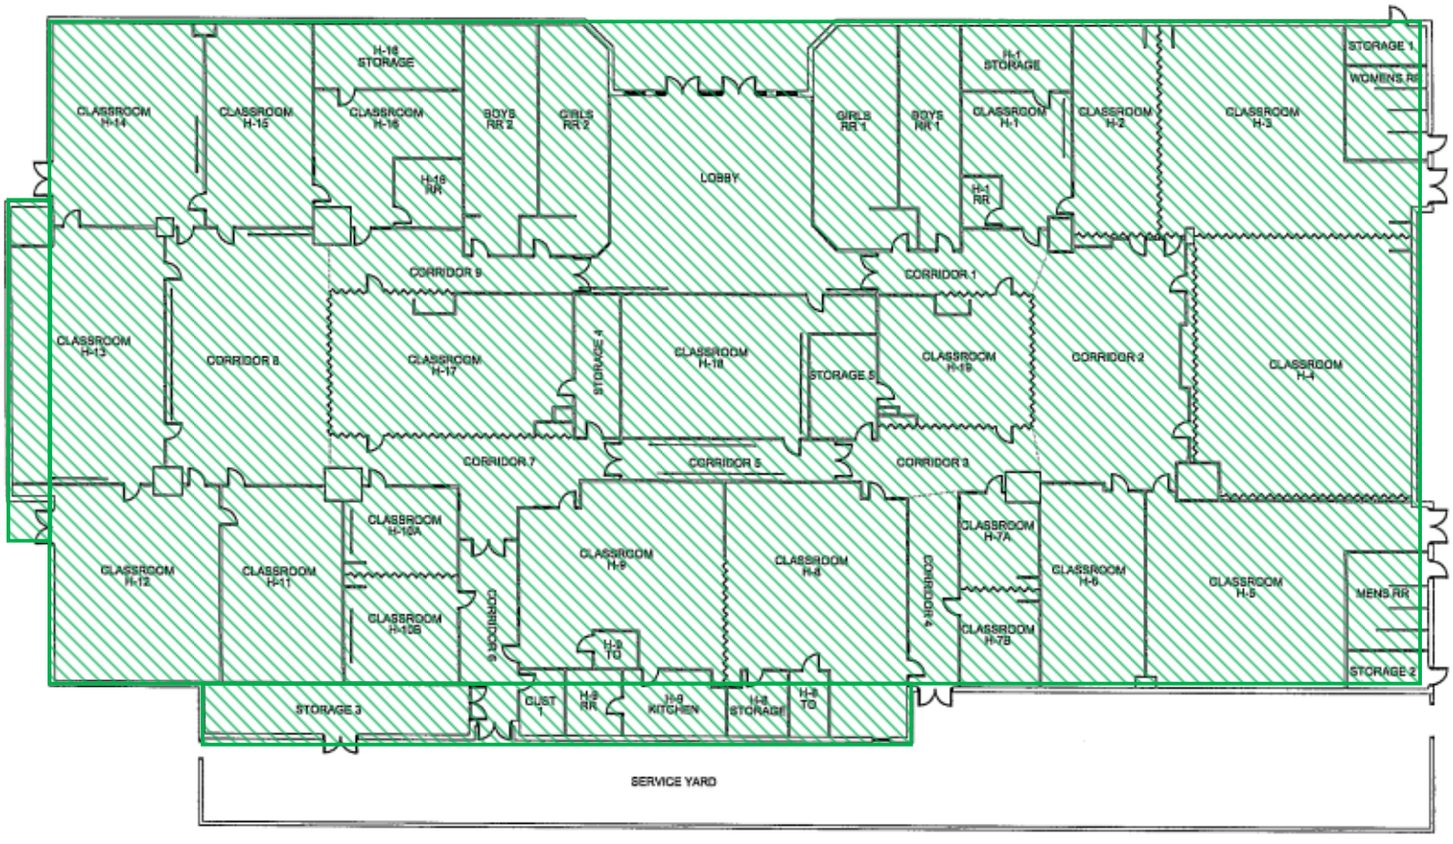

Assumed Asbestos-Containing
Large Pipe Wrap & Mastic
Small Pipe Wrap & Mastic
Black Pipe Foam Insulation
Silver Box Duct Wrap
Silver Duct Wrap
Silver Flex Duct Wrap
White Duct Tape & Mastic
Unfinished Drywall
Silver Duct Tape
Skylight Insulation Panel
Interior/Exterior Caulking
Block & Mortar
Brick & Mortar
Tacboard & Mastic

N

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building H

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

SECTION 11

♦

INSPECTOR ACCREDITATIONS

THE ASBESTOS INSTITUTE

Certifies that

Garth Backman

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

July 16, 2021

and successfully completed and passed the competency exam.

Certificate:
ON-4644-12304-071621

Date of Examination:
16-Jul-2021
Date of Expiration:
16-Jul-2022

William T. Cavness
Director

Approved Instructor

THE ASBESTOS INSTITUTE
20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

This training meets all requirements for asbestos certification under Toxic Substance Control Act Title II.

THE ASBESTOS INSTITUTE

Certifies that

Nicholas Marcos

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

March 24, 2022

and successfully completed and passed the competency exam.

Certificate:
ON-4644-8873-032422

Date of Examination:
24-Mar-2022
Date of Expiration:
24-Mar-2023

William T. Cavness
Director

Approved Instructor

THE ASBESTOS INSTITUTE
20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

This training meets all requirements for asbestos certification under Toxic Substance Control Act Title II.

THE ASBESTOS INSTITUTE

Certifies that

Tracey Carpenter

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

August 29, 2024

and successfully completed and passed the competency exam.

Certificate:
ON-188748-14588-082924

Date of Examination:
29-Aug-2024

Date of Expiration:
29-Aug-2025

William T. Cavness
Director

Approved Instructor

THE ASBESTOS INSTITUTE
20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

The person receiving this certificate has completed the requisite training for asbestos accreditation under TSCA Title II.

THE ASBESTOS INSTITUTE

Certifies that

Nicholas Marcos

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

March 13, 2025

and successfully completed and passed the competency exam.

Certificate:
ON-188748-8873-031325

Date of Examination:
13-Mar-2025
Date of Expiration:
13-Mar-2026

A. Zwanenburg
Director

Approved Instructor

THE ASBESTOS INSTITUTE
20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

FL Course # CRS228

The person receiving this certificate has completed the requisite training for asbestos accreditation under TSCA Title II.

SECTION 12

♦

LABORATORY ACCREDITATIONS

United States Department of Commerce
National Institute of Standards and Technology

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500031-0

Eurofins EMLab P&K

Phoenix, AZ

is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:

Asbestos Fiber Analysis

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).

2021-01-01 through 2021-12-31

Effective Dates

For the National Voluntary Laboratory Accreditation Program

National Voluntary Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

Eurofins EMLab P&K
1501 W. Knudsen Dr.
Phoenix, AZ 85027-1307
Mr. Dan Shelby
Phone: 623-298-1015
Email: dshelby@emlabpk.com
http://www.emlab.com

ASBESTOS FIBER ANALYSIS — NVLAP LAB CODE 500031-0

Bulk Asbestos Analysis

Code	*Description*
18/A01	EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples
18/A03	EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials

For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500031-0

Eurofins EMLab P&K

Phoenix, AZ

is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:

Asbestos Fiber Analysis

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).

2022-01-01 through 2022-12-31

Effective Dates

For the National Voluntary Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

Eurofins EMLab P&K
1501 W. Knudsen Dr.
Phoenix, AZ 85027-1307
Mr. Dan Shelby
Phone: 623-298-1015
Email: dan.shelby@eurofinset.com
http://www.emlab.com

ASBESTOS FIBER ANALYSIS — NVLAP LAB CODE 500031-0

Bulk Asbestos Analysis

Code	*Description*
18/A01	EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples
18/A03	EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials

For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500031-0

Eurofins EMLab P&K

Phoenix, AZ

is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:

Asbestos Fiber Analysis

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).

2024-01-01 through 2024-12-31

Effective Dates

For the National Voluntary Laboratory Accreditation Program

National Voluntary Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

Eurofins EMLab P&K
1501 W. Knudsen Dr.
Phoenix, AZ 85027-1307
Claudia Palermo
Phone: 856-334-1001
Email: claudia.palermo@et.eurofinsus.com
https://www.eurofinsus.com/environment-testing/built-environment/

ASBESTOS FIBER ANALYSIS — NVLAP LAB CODE 500031-0

Bulk Asbestos Analysis

Code	*Description*
18/A01	EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples
18/A03	EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials

For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500031-0

Eurofins EMLab P&K

Phoenix, AZ

is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:

Asbestos Fiber Analysis

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique on ISO/IEC 17025).

2025-01-01 through 2025-12-31

Effective Dates

For the National Voluntary Laboratory Accreditation Program

National Voluntary Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

Eurofins EMLab P&K
1501 W. Knudsen Dr.
Phoenix, AZ 85027-1307
Joshua Snyder
Phone: 800-651-4802
Email: joshua.snyder@et.eurofinsus.com
https://www.eurofinsus.com/environment-testing/built-environment/

ASBESTOS FIBER ANALYSIS — NVLAP LAB CODE 500031-0

Bulk Asbestos Analysis

Code	*Description*
18/A01	EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples
18/A03	EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials

For the National Voluntary Laboratory Accreditation Program

SECTION 3

♦

DESIGNATED PERSON IDENTIFICATION

AHERA
Designated Person
796.93(e)(4)

LEA Designated Person

Print Name:

Address:

Phone:

Training Course Name:

Dates of Training:

Hours of Training:

Signature:

Date:

SECTION 4

♦

AHERA TRAINING CERTIFICATIONS OF SCHOOL STAFF MEMBERS

SECTION 5

♦

RESPONSE ACTIONS WITH DETIALS, REASONS, AND SCHEDULES

Response Actions

Management Planner:

Print Name: Xin Lou **Signature:** 

State of Accreditation or EPA: EPA AHERA - Arizona

Accreditation # & Date: # ON-4651-548-100324, October 3, 2025

Date: August 20, 2025

Building: F

Homogeneous Area #: 44

Homogeneous Area Description: Skylight Insulation Panel

Location: Above Ceiling

Action:	**Repair**	**Remove**	**O & M**	X
	Encapsulation	**Enclose**		

Reason: N/A

Schedule (Start/Finish): End of ACBM Life

ACBM Remaining After Response Action: 2,500 sq. ft.

DOMINION ENVIRONMENTAL CONSULTANTS, INC.
20045 North 19th Avenue ✦ Building #7 ✦ Phoenix, Arizona 85027
Tel: (623) 516-1415 ✦ Fax: (623) 516-0017
www.dominion-env.com

Response Actions

Management Planner:

Print Name: Xin Lou **Signature:** 

State of Accreditation or EPA: EPA AHERA - Arizona

Accreditation # & Date: # ON-4651-548-100324, October 3, 2025

Date: August 20, 2025

Building: G

Homogeneous Area #: 38

Homogeneous Area Description: Skylight Insulation Panel

Location: Above Ceiling

Action:	**Repair**	**Remove**	**O & M**	X
	Encapsulation	**Enclose**		

Reason: N/A

Schedule (Start/Finish): End of ACBM Life

ACBM Remaining After Response Action: 1,500 sq. ft.

DOMINION ENVIRONMENTAL CONSULTANTS, INC.
20045 North 19th Avenue ✦ Building #7 ✦ Phoenix, Arizona 85027
Tel: (623) 516-1415 ✦ Fax: (623) 516-0017
www.dominion-env.com

Response Actions

Management Planner:

Print Name: Xin Lou **Signature:** 

State of Accreditation or EPA: EPA AHERA - Arizona

Accreditation # & Date: # ON-4651-548-100324, October 3, 2025

Date: August 20, 2025

Building: H

Homogeneous Area #: 68

Homogeneous Area Description: Skylight Insulation Panel

Location: Above Ceiling

Action:	**Repair**	**Remove**	**O & M**	X
	Encapsulation	**Enclose**		

Reason: N/A

Schedule (Start/Finish): End of ACBM Life

ACBM Remaining After Response Action: 2,000 sq. ft.

DOMINION ENVIRONMENTAL CONSULTANTS, INC.
20045 North 19th Avenue ✦ Building #7 ✦ Phoenix, Arizona 85027
Tel: (623) 516-1415 ✦ Fax: (623) 516-0017
www.dominion-env.com

SECTION 6

♦

ACCREDITATION STATEMENT

Assurance of Accreditation
Under this Management Plan

763.93(e)(7)

Inspector:

Name: Nick Marcos
State of Accreditation or EPA: EPA AHERA Building Inspector - Arizona
Accreditation Date(s): March 13, 2025 – March 13, 2026
Accreditation Number(s): ON-188748-8873-031325

Management Planner:

Name: Xin Lou
State of Accreditation or EPA: EPA AHERA Management Planner – Arizona
Accreditation Date(s) Valid: October 3, 2024-October 3, 2025
Accreditation Number(s): ON-4651-548-100324

Any Project Designer, Contractor/Supervisor or Worker who performs work on response actions under this Management Plan shall be accredited by either an EPA approved state contractor accreditation plan or an EPA approved course under section 206(b) to Title II of the Toxic Substance Control Act.

SECTION 7

♦

REMAINING ACBM

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	**Campus: Kyrene Centennial Middle School**
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: Admin	

Homogeneous Area Number	Material Description	Location(s)	Quantity
11	Black Carpet Square	Throughout Building	1,000
12	Mastic for Black Carpet Square		
13	Interior Caulking	Throughout Building	200
14	Exterior Caulking	Throughout Building	200
15	Tacboard	Offices	15,000
16	Mastic for Tacboard		
17	Window Glazing	Throughout Building	100
18	Brick	Building Exterior	100,000
19	Mortar for Brick		
20	Glass Block Mortar	Building Entrance	500
21	Block	Building Exterior	50,000
22	Mortar for Block		
23	Black Sink Coating	Teachers Lounge/Break Room	50
24	Gray Wallpaper	Telephone Room	750
25	Fixture Caulking	Restrooms	100
26	FRP	Custodian and Drinking Fountains Throughout	250
27	Mastic for FRP		
28	Brown Cove Base	Custodian	100
29	Mastic for Brown Cove Base		
30	Knockdown Drywall System	Custodian	1,500
31	Tan Striped Wallpaper	Nurses Closet	500
32	Large Pipe Wrap	Above Ceiling	3,000
33	Mastic for Large Pipe Wrap		
34	Small Pipe Wrap	Above Ceiling	1,500
35	Mastic for Small Pipe Wrap		
36	Black Pipe Insulation Foam	Above Ceiling	500
37	Silver Box Duct Wrap	Above Ceiling	5,000
38	Silver Duct Wrap	Above Ceiling	5,000

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	**Campus: Kyrene Centennial Middle School**
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: Admin	

Homogeneous Area Number	Material Description	Location(s)	Quantity
39	Silver Flex Duct Wrap	Above Ceiling	3,000
40	White Duct Seam Tape	Above Ceiling	1,000
41	Mastic for Duct Seam Tape		
42	Unfinished Drywall System	Above Ceiling	20,000
43	Silver Duct Tape	Above Ceiling	250

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	**Campus: Kyrene Centennial Middle School**
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: B	

Homogeneous Area Number	Material Description	Location(s)	Quantity
16	Black Entry Carpet	Entrances	375
17	Mastic for Entry Carpet		
18	Interior Caulking	Throughout Building	200
19	Exterior Caulking	Throughout Building	200
20	Black Sink Coating	Classrooms	60
21	FRP	Custodial and Drinking Fountains	350
22	Mastic for FRP		
23	Tacboard	Classrooms	15,000
24	Mastic for Tacboard		
25	White 2"x2" Ceramic Floor Tile	Restrooms	3,000
26	Grout for White 2"x2" Ceramic Floor Tile		
27	Thinset for White 2"x2" Ceramic Floor Tile		
28	Peach 2"x2" Ceramic Floor Tile	Restrooms	1,000
29	Grout for Peach 2"x2" Ceramic Floor Tile		
30	Thinset for Peach 2"x2" Ceramic Floor Tile		
31	Blue 2"x2" Ceramic Floor Tile	Restrooms	1,000
32	Grout for Blue 2"x2" Ceramic Floor Tile		
33	Thinset for Blue 2"x2" Ceramic Floor Tile		
34	Off-White 4"x4" Ceramic Wall Tile	Restrooms	5,000
35	Grout for Off-White 4"x4" Ceramic Wall Tile		
36	Mastic for Off-White 4"x4" Ceramic Wall Tile		
37	Peach 4"x4" Ceramic Wall Tile	Restrooms	1,000
38	Grout for Peach 4"x4" Ceramic Wall Tile		
39	Mastic for Peach 4"x4" Ceramic Wall Tile		
40	Fixture Caulking	Restrooms	100
41	Brown Cove Base	Custodial	45
42	Mastic for Cove Base		
43	White w. Black 12"x 12" VCT	B7 Closets, Work Room RR's, and Storage Rooms	3,000
44	Mastic for White w. Black 12"x 12" VCT		

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	Campus: Kyrene Centennial Middle School
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: B	

Homogeneous Area Number	Material Description	Location(s)	Quantity
45	Knockdown Drywall System	Electrical	2,000
46	Brick	Building Exterior	100,000
47	Mortar for Brick		
48	Expansion Joint	Building Exterior	200
49	Silver Box Duct Wrap	Above Ceiling	5,000
50	Silver Duct Wrap	Above Ceiling	4,000
51	Silver Flex Duct Wrap	Above Ceiling	3,000
52	White Duct Tape	Above Ceiling	1,000
53	Mastic for Duct Tape		
54	Large Pipe Wrap	Above Ceiling	3,000
55	Mastic for Pipe Wrap		
56	Small Pipe Wrap	Above Ceiling	2,000
57	Mastic for Pipe Wrap		
58	Unfinished Drywall System	Above Ceiling	20,000

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	**Campus: Kyrene Centennial Middle School**
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: C	

Homogeneous Area Number	Material Description	Location(s)	Quantity
11	Black Entry Carpet	Entrance to Building	375
12	Mastic for Entry Carpet		
13	Interior Caulking	Throughout Building	200
14	Black Sink Coating	Sinks Throughout Building	60
15	Exterior Caulking	Throughout Building	200
16	Tacboard	Throughout Building	15000
17	Mastic for Tacboard		
18	Knockdown Drywall System	Electrical	2,000
19	Brown Cove Base	Electrical and Custodial	45
20	Mastic for Cove Base		
21	White w. Black 12" x 12" VCT	Storage and Work Room Restroom	3,000
22	Mastic for White w. Black 12" x 12" VCT		
23	Divider Wall	Rooms C6 and C7	2,000
24	White 2" x 2" Ceramic Floor Tile	Restrooms	3,000
25	Grout for White 2" x 2" Ceramic Floor Tile		
26	Thinset White 2" x 2" Ceramic Floor Tile		
27	Peach 2" x 2" Ceramic Floor Tile	Restrooms	1,000
28	Grout for Peach 2" x 2" Ceramic Floor Tile		
29	Thinset Peach2" x 2" Ceramic Floor Tile		
30	Blue 2" x 2" Ceramic Floor Tile	Restrooms	1,000
31	Grout for Blue 2" x 2" Ceramic Floor Tile		
32	Thinset Blue 2" x 2" Ceramic Floor Tile		
33	Off-white 4" x 4" Ceramic Wall Tile	Restrooms	5,000
34	Grout for Off-white 4" x 4" Ceramic Wall Tile		
35	Mastic Blue Off-white 4" x 4" Ceramic Wall Tile		
36	Peach 4" x 4" Ceramic Wall Tile	Restrooms	1,000
37	Grout for Peach 4" x 4" Ceramic Wall Tile		
38	Mastic Blue Peach 4" x 4" Ceramic Wall Tile		
39	Fixture Caulking	Restrooms	100

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	**Campus: Kyrene Centennial Middle School**
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: C	

Homogeneous Area Number	Material Description	Location(s)	Quantity
40	FRP	Custodial	350
41	Mastic for FRP		
42	Black Countertops	Rooms C5 and C8	5,000
43	Brick	Building Exterior	100,000
44	Mortar for Brick		
45	Expansion Joint	Building Exterior	200
46	Silver Box Duct Wrap	Above Ceiling	5,000
47	Silver Duct Wrap	Above Ceiling	4,000
48	Silver Flex Duct Wrap	Above Ceiling	3,000
49	White Duct Tape	Above Ceiling	1,000
50	Mastic for Duct Tape		
51	Large Pipe Wrap	Above Ceiling	3,000
52	Mastic for Large Pipe Wrap		
53	Small Pipe Wrap	Above Ceiling	2,000
54	Mastic for Small Pipe Wrap		
55	Unfinished Drywall System	Above Ceiling	20,000

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	**Campus: Kyrene Centennial Middle School**
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: D	

Homogeneous Area Number	Material Description	Location(s)	Quantity
27	Black Entry Carpet	Entrance to Building	375
28	Mastic for Entry Carpet		
29	Interior Caulking	Throughout Building	200
30	Exterior Caulking	Throughout Building	200
31	Black Sink Coating	Classrooms	60
32	Tacboard	Throughout Building	15,000
33	Mastic for Tacboard		
34	Knockdown Drywall	Electrical Room	2,000
35	White w. Black 12" x 12" VCT	Storage Rooms	3,000
36	Mastic for White w. Black 12" x 12" VCT		
37	Black Countertops	Rooms D5 and D8	5,000
38	FRP	Custodial	350
39	Mastic for FRP		
40	Brown Cove Base	Storage Rooms	45
41	Mastic for Cove Base		
42	Divider Wall	Rooms D6 and D7	2,000
43	White 2" x 2" Ceramic Floor Tile	Restrooms	3,000
44	Grout for White 2" x 2" Ceramic Floor Tile		
45	Thinset for White 2" x 2" Ceramic Floor Tile		
46	Peach 2" x 2" Ceramic Floor Tile	Restrooms	1,000
47	Grout for Peach 2" x 2" Ceramic Floor Tile		
48	Thinset for Peach 2" x 2" Ceramic Floor Tile		
49	Blue 2" x 2" Ceramic Floor Tile	Restrooms	1,000
50	Grout for Blue 2" x 2" Ceramic Floor Tile		
51	Thinset for Blue 2" x 2" Ceramic Floor Tile		
52	Off-White 4" x 4" Ceramic Wall Tile	Restrooms	5,000
53	Grout for Off-White 4" x 4" CeramicWall Tile		
54	Mastic for Off-White 4" x 4" Ceramic Wall Tile		

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	**Campus: Kyrene Centennial Middle School**
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: D	

Homogeneous Area Number	Material Description	Location(s)	Quantity
55	Peach 4" x 4" Ceramic Wall Tile	Restrooms	1,000
56	Grout for Peach 4" x 4" Ceramic Wall Tile		
57	Mastic for Peach 4" x 4" Ceramic Wall Tile		
58	Fixture Caulking	Restrooms	100
59	Brick	Building Exterior	100,000
60	Mortar for Brick		
61	Expansion Joint	Building Exterior	200
62	Silver Box Duct Wrap	Above Ceiling	5,000
63	Silver Duct Wrap	Above Ceiling	4,000
64	Silver Flex Duct Wrap	Above Ceiling	3,000
65	White Duct Tape	Above Ceiling	1,000
66	Mastic for Duct Tape		
67	Large Pipe Wrap	Above Ceiling	3,000
68	Mastic for Large Pipe Wrap		
69	Small Pipe Wrap	Above Ceiling	2,000
70	Mastic for Small Pipe Wrap		
71	Unfinished Drywall System	Above Ceiling	20,000

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	**Campus: Kyrene Centennial Middle School**
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: E	

Homogeneous Area Number	Material Description	Location(s)	Quantity
18	Black Entry Carpet	Building Entrance	500
19	Mastic		
20	Blue Cove Base	Throughout Building	750
21	Mastic for Cove Base		
22	Interior Caulking	Throughout Building	200
23	Exterior Caulking	Throughout Building	200
24	Black Window Glazing	Windows Throughout	300
25	Black Sink Coating	Classrooms Throughout	50
26	Divider Wall	Stage	1500
27	Blue 6" Cove Base	Ramp	150
28	Mastic for Blue 6" Cove Base		
29	Black 6" Cove Base	Multipurpose Room	350
30	Mastic for Black 6" Cove Base		
31	Gray Speckled 12" x 12" VCT	Gym Janitors Closet	150
32	Mastic for Gray VCT		
33	Brick	Throughout Building	150,000
34	Mortar for Brick		
35	Expansion Joint	Throughout Building	250
36	Black L Shaped Cove Base	Stage and Gym	500
37	Mastic for L Shaped Cove Base		
38	Old FRP	Ramp Hallway and Gym Janitors Closet	750
39	Mastic for Old FRP		
40	Tacboard	Throughout Building	15,000
41	Mastic for Tacboard		
42	Brown 6" Cove Base	Stage Entry	45
43	Mastic for 6" Cove Base		
44	Brown 4" Cove Base	Locker Room Storage	75
45	Mastic for Brown 4" Cove Base		

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	**Campus: Kyrene Centennial Middle School**
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: E	

Homogeneous Area Number	Material Description	Location(s)	Quantity
46	White w/ Gray Specks 12" X 12" VCT	Northeast Stage Entry	100
47	Mastic		
48	New FRP	Kitchen and Custodial	1,500
49	Mastic for New FRP		
50	Brown 6" x 6" Ceramic Floor Tile	Kitchen and Snack Bar	10,000
51	Grout for Brown 6" x 6" Ceramic Floor Tile		
52	Thinset for Brown 6" x 6" Ceramic Floor Tile		
53	Brown 4" x 6" Ceramic Cove Base	Kitchen and Snack Bar	1,500
54	Mastic for Brown 4" x 6" Ceramic Cove Base		
55	Drywall 2' x 4' Ceiling Tile	Kitchen and Snack Bar	3,000
56	Polished Concrete	Throughout Building	15,000
57	Floor Expansion Joint for Polished Concrete		150
58	White w. Black 12" x 12" VCT	Locker Room Storage	250
59	Mastic for 12" x 12" VCT		
60	Black 4" Cove Base	Lobby and Locker Rooms	300
61	Mastic for Black 4" Cove Base		
62	White 4" x 4" Ceramic Wall Tile	Lobby Restrooms and Locker Rooms	6,000
63	Grout for White 4" x 4" Ceramic Wall Tile		
64	Mastic for White 4" x 4" Ceramic Wall Tile		
65	Red 4" x 4" Ceramic Wall Tile	Lobby Restrooms and Locker Rooms	2,000
66	Grout for Red 4" x 4" Ceramic Wall Tile		
67	Mastic for Red 4" x 4" Ceramic Wall Tile		
68	Black 4" x 4" Ceramic Wall Tile	Lobby Restrooms and Locker Rooms	500
69	Grout for Black 4" x 4" Ceramic Wall Tile		
70	Mastic for Black 4" x 4" Ceramic Wall Tile		
71	Gray Floor Coating	Lobby Restrooms	1,500
72	Fixture Caulking	Restrooms	200
73	Glass Block Mortar	Main Entry's	350
74	Red 3" x 12" Ceramic Wall Tile	Lobby Restroom	3,000

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	**Campus: Kyrene Centennial Middle School**
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: E	

Homogeneous Area Number	Material Description	Location(s)	Quantity
75	Gray FRP	Locker Room Hallways	2,000
76	Mastic for FRP		
77	Concrete Benches	Locker Rooms	2,500
78	Gray 6" x 6" Ceramic Floor Tile	Locker Rooms Showers	3,000
79	Grout for Gray 6" x 6" Ceramic Floor Tile		
80	Thinset for Gray 6" x 6" Ceramic Floor Tile		
81	Green Speckled 2" x 2" Ceramic Floor Tile	Main Exterior Restrooms	500
82	Grout for Ceramic Floor Tile		
83	Thinset for Ceramic Floor Tile		
84	Gray 2" x 2" Ceramic Floor Tile	Main Exterior Restrooms	500
85	Grout for Ceramic Floor Tile		
86	Thinset for Ceramic Floor Tile		
87	Peach 4" x 4" Ceramic Wall Tile	Main Exterior Restrooms	500
88	Grout for Peach 4" x 4" Ceramic Wall Tile		
89	Thinset for Peach 4" x 4" Ceramic Wall Tile		
90	Gray 4" x 4" Ceramic Wall Tile	Main Exterior Restrooms	500
91	Grout for Gray 4" x 4" Ceramic Wall Tile		
92	Thinset for Gray 4" x 4" Ceramic Wall Tile		
93	Silver Box Duct Wrap	Above Ceiling	6,000
94	Silver Duct Wrap	Above Ceiling	5,000
95	Silver Flex Duct Wrap	Above Ceiling	4,000
96	White Duct Tape	Above Ceiling	1,500
97	Mastic for Duct Tape	Above Ceiling	
98	Gray Duct Mastic	Above Ceiling	200
99	Large Pipe Wrap	Above Ceiling	5,000
100	Mastic for Large Pipe Wrap		
101	Small Pipe Wrap	Above Ceiling	3,000
102	Mastic for Pipe Wrap		
103	Unfinished Drywall	Above Ceiling	25,000

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	**Campus: Kyrene Centennial Middle School**
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: F	

Homogeneous Area Number	Material Description	Location(s)	Quantity
7	Blue Cove Base	Classrooms	350
8	Mastic for Blue Cove Base		
9	Interior Caulking	Throughout Building	150
10	Exterior Caulking	Throughout Building	150
11	Black Window Glazing	Throughout Building	100
12	Tacboard	Classrooms	10,000
13	Mastic for Tacboard		
14	White w. Black 12" x 12" VCT	Choir Storage, Restroom, and Laundry Room	1,500
15	Mastic for VCT		
16	Fixture Caulking	Restrooms	100
17	Gray Sink Coating	Rooms F-1, F-3, and F-5	15
18	Brown Cove Base	Choir Storage, Restroom, Dark Room, and Laundry Room	100
19	Mastic for Brown Cove Base		
20	Polished Concrete	Room F-2	1,500
21	Floor Expansion Joint for Polished Concrete		100
22	Gray Duct Mastic	Above Ceiling	100
23	Black Rubber Gym Floor	Room F-5	2,000
24	Black Cove Base	Room F-5 and F-6 Backroom	100
25	Mastic for Black Cove Base		
26	Gray Wood Vinyl Flooring	Room F-5 and F-6 Backroom	1,000
27	Mastic for Gray Wood Vinyl Flooring		
28	Divider Wall	Room F-5 and F-6	1,500
29	Brick	Throughout Building	75,000
30	Mortar for Brick		
31	Expansion Joint	Throughout Building	150
32	Large Pipe Wrap	Above Ceiling	3,000
33	Mastic for Large Pipe Wrap		

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	Campus: Kyrene Centennial Middle School
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: F	

Homogeneous Area Number	Material Description	Location(s)	Quantity
34	Small Pipe Wrap	Above Ceiling	2,000
35	Mastic for Pipe Wrap		
36	Black Pipe Foam Insulation	Above Ceiling	150
37	Silver Box Duct Wrap	Above Ceiling	3,000
38	Silver Duct Wrap	Above Ceiling	2,000
39	Silver Flex Duct Wrap	Above Ceiling	2,500
40	White Duct Tape	Above Ceiling	200
41	Mastic for Duct Tape	Above Ceiling	
42	Unfinished Drywall	Above Ceiling	1,500
43	Silver Duct Tape	Above Ceiling	150
44	Skylight Insulation Panel	Above Ceiling	2,500

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	**Campus: Kyrene Centennial Middle School**
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: G	

Homogeneous Area Number	Material Description	Location(s)	Quantity
7	Black Entry Carpet	Building Entrances	250
8	Mastic for Entry Carpet		
9	Blue Cove Base	Throughout Building	350
10	Mastic for Cove Base		
11	Interior Caulking	Throughout Building	100
12	Exterior Caulking	Throughout Building	100
13	Black Sink Coating	Office Sink	10
14	Tacboard	Classrooms and Media Center	10,000
15	Mastic for Tacboard		
16	White w. Black 12" x 12" VCT	Throughout Building	750
17	Mastic for VCT		
18	Green Wallpaper	Media Center Restroom	400
19	Glass Block Mortar	Building Entrances	250
20	White w. Gray 12" x 12" VCT	IDF Room	350
21	Mastic for VCT		
22	Gray Wallpaper	Storage	250
23	Knockdown Drywall	Custodian Closet	1,000
24	Brown Cove Base	Computer Lab Storage	45
25	Mastic for Brown Cove Base		
26	Large Pipe Wrap	Above Ceiling	3,000
27	Mastic for Large Pipe Wrap		
28	Small Pipe Wrap	Above Ceiling	2,000
29	Mastic for Pipe Wrap		
30	Black Pipe Foam Insulation	Above Ceiling	100
31	Silver Box Duct Wrap	Above Ceiling	3,000
32	Silver Duct Wrap	Above Ceiling	2,000
33	Silver Flex Duct Wrap	Above Ceiling	2,000

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	**Campus: Kyrene Centennial Middle School**
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: G	

Homogeneous Area Number	Material Description	Location(s)	Quantity
34	White Duct Tape	Above Ceiling	250
35	Mastic for Duct Tape	Above Ceiling	
36	Unfinished Drywall	Above Ceiling	10,000
37	Silver Duct Tape	Above Ceiling	50
38	Skylight Insulation Panel	Above Ceiling	1,500

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	**Campus: Kyrene Centennial Middle School**
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: H	

Homogeneous Area Number	Material Description	Location(s)	Quantity
12	Black Entry Carpet	Building Entraces	250
13	Mastic for Black Entry Carpet		
14	Interior Caulking	Throughout Building	150
15	Exterior Caulking	Throughout Building	150
16	Black Sink Coating	Classrooms	100
17	Tacboard	Throughout Building	15,000
18	Mastic for Tacboard		
19	White Sink Coating	Room H-11	5
20	Fume Hood Panel	Room H-11 and H-6	50
21	Tan Speckled 12" x 12" VCT	Storage and Janitors Closet	500
22	Mastic for Tan Speckled 12" x 12" VCT		
23	Gray Cove Base	Storages, H-8 Office, and Workroom Restroom	250
24	Mastic for Gray Cove Base		
25	FRP	Janitors Closet and H-9 Restroom	300
26	Mastic for FRP		
27	Smooth Drywall	Janitors Closet	2,500
28	White w. Gray Specks 12" x 12" VCT	Room H-9, H-6, H-8, and Storages	3,000
29	Mastic for White w. Gray Specks 12" x 12" VCT		
30	Divider Wall	Rooms H-7, H-8, and H-9	3,000
31	Block	Throughout Building	75,000
32	Mortar for Block		
33	Brick	Throughout Building	75,000
34	Mortar for Brick		
35	Off-White 4" x 4" Ceramic Wall Tile	Restrooms	4,000
36	Mastic for Off-White 4" x 4" Ceramic Wall Tile		
37	Grout for Off-White 4" x 4" Ceramic Wall Tile		
38	Peach 4" x 4" Ceramic Wall Tile	Restrooms	500
39	Mastic for Peach 4" x 4" Ceramic Wall Tile		
40	Grout for Peach 4" x 4" Ceramic Wall Tile		

Dominion Environmental Consultants, Inc.
Remaining ACBM After Planned Response Actions

Client: Kyrene Elementary School District	**Campus: Kyrene Centennial Middle School**
	Address: 13808 S 36th Street, Phoenix, Arizona 85044
Building: H	

Homogeneous Area Number	Material Description	Location(s)	Quantity
41	Gray 4" x 4" Ceramic Wall Tile	Restrooms	500
42	Mastic for Gray 4" x 4" Ceramic Wall Tile		
43	Grout for Gray 4" x 4" Ceramic Wall Tile		
44	Off-White 2" x 2" Ceramic Floor Tile	Restrooms	3,000
45	Grout for Off-White 2" x 2" Ceramic Floor Tile		
46	Thinset for Off-White 2" x 2" Ceramic Floor Tile		
47	Green Speckled 2" x 2" Ceramic Floor Tile	Restrooms	500
48	Grout for 2" x 2" Ceramic Floor Tile		
49	Thinset for 2" x 2" Ceramic Floor Tile		
50	Gray Speckled 2" x 2" Ceramic Floor Tile	Restrooms	500
51	Grout for 2" x 2" Ceramic Floor Tile		
52	Thinset for 2" x 2" Ceramic Floor Tile		
53	Fixture Caulking	Restrooms	100
54	Glass Block Mortar	Building Entraces	200
55	Knockdown Drywall	Electrical	2,000
56	Large Pipe Wrap	Above Ceiling	5,000
57	Mastic for Large Pipe Wrap		
58	Small Pipe Wrap	Above Ceiling	4,000
59	Mastic for Pipe Wrap		
60	Black Pipe Foam Insulation	Above Ceiling	1,000
61	Silver Box Duct Wrap	Above Ceiling	5,000
62	Silver Duct Wrap	Above Ceiling	4,000
63	Silver Flex Duct Wrap	Above Ceiling	3,000
64	White Duct Tape	Above Ceiling	500
65	Mastic for Duct Tape	Above Ceiling	
66	Unfinished Drywall	Above Ceiling	20,000
67	Silver Duct Tape	Above Ceiling	100
68	Skylight Insulation Panel	Above Ceiling	2,000

SECTION 8

♦

OPERATIONS & MAINTENANCE PLAN

KYRENE ELEMENTARY SCHOOL DISTRICT

OPERATIONS AND MAINTENANCE PLAN

for

ASBESTOS CONTROL

O & M POLICIES AND PROCEDURES

1. INTRODUCTION

Asbestos is a common name for a group of natural minerals that separate into strong, fine fibers when crushed or broken. Its unique fiber properties include tensile strength, thermal insulation, chemical resistance, condensation control, friction resistance, and non-combustibility. Asbestos has been mined from the earth like coal for thousands of years.

The two groups of asbestos are serpentine and amphibole. The three most commonly found asbestos types are:

* Serpentine chrysotile, known as the "white" asbestos, is found in about 91 percent of all asbestos used in commercial products. It has fine, long, flexible fibers with high tensile strength and is primarily mined in Canada and the Soviet Union.
* Amphibole amosite, known as the "brown" asbestos, is found in about 8 percent of all asbestos used in commercial products. It has straight, brittle fibers and resists temperatures up through 480 degrees Celsius. It is mined primarily in South Africa.
* Crocidolite, known as the "blue" asbestos, is found in less than 1 percent of all asbestos used in commercial products. It is the strongest of asbestos with straight and brittle fibers and is also mined in South Africa.

Also included in the amphibole group are anthophyllite, tremolite and actinolite. These types are rarely used in commercial products but may be found as contaminants included in the base ingredients of commercial products.

History

The asbestos industry began in the 1870s when the first commercial chrysotile mine opened in Quebec, Canada. In South Africa, crocidolite was mined in the 1880's while amosite mining began in 1916.

From 1870-1900, asbestos was used in insulation and gaskets. After 1900, its most common use was on steam pipes and boilers in ships. In the 1940's, asbestos was mostly used in the form of mechanical insulation. The three classifications of building materials that contain asbestos include: (1) Thermal System Insulation (TSI), which is mechanical system insulation used to control heat transfer or condensate on plumbing and HVAC systems; (2) Surfacing Material, which is any material sprayed or troweled on surfaces, such as fireproofing, plaster or acoustical applications; (3) Miscellaneous Material, which includes anything which is not TSI or Surfacing, such as roofing, flooring, drywall, or asbestos cement products.

The 1940's marked major changes in the use of asbestos in the United States. Asbestos use was expanded to include architectural finishes. Amosite became widely used for insulation in ships and shipyards. Spray-applied fireproofing materials were largely used in buildings. From 1945 to 1980, it has been estimated that more than half of the large, multi-story buildings constructed contain asbestos spray-applied materials.

Asbestos-Related Diseases

Asbestos fibers enter the body in two ways: (1) inhalation or (2) ingestion. They cannot enter the body by penetrating the skin.

The three main asbestos–related diseases are (1) Lung Cancer, a cancer of the bronchial tube area of the lungs, (2) Asbestosis, a scarring of the lung at the alveoli area which restricts oxygen intake, and (3) Mesothelioma, a tumor or cancer occurring on the tissue which lines the lung area and the intestinal area of the body.

The latency period for asbestos-related diseases is usually 20 - 40 years, depending on the disease. Exposure to asbestos is asymptomatic. While generally not treatable, asbestos diseases are dose–response related and quite preventable (the purpose of a pro-active O & M program).

Asbestos Today

At one time there were over 3,600 commercial products that contained varying amounts of asbestos. The Federal Environmental Protection Agency (EPA) and Occupational Safety and Health Administration (OSHA) estimate that over 2,000 of the 3,600 asbestos containing products were used in a variety of building materials. By 1978 EPA had banned the use of asbestos in any spray application and TSI. However, most other uses of ACM are still allowed.

Asbestos Management In Buildings

The first three steps to manage ACM in a facility are:

* Identify and determine the extent of the problem,
* Perform a hazard assessment on each material to determine its potential for asbestos fiber release, and
* Develop a plan and schedule to deal with ACM in each facility. This is the Asbestos Management Plan.

In the planning process, there are five options to deal with the ACM. They include (1) operations and maintenance (O & M) program, (2) repair, (3) enclosure, (4) encapsulation and (5) removal. While removal of asbestos from facilities is the only permanent option, and will be required at some point of building use, (disturbance by renovation or demolition: see 40 CFR 61 Subpart M, 11/20/90), it is not always the most practical initial option. Often, O & M practices are recommended as the most feasible and economic option that may protect human health and the environment. It should also be noted that any control option other than removal will result in the need for an O & M program to maintain the ACM which is being left in the building until removal is required.

Description of an O & M Plan

An O & M plan is a set of policies, procedures and work practices that are intended to minimize occupant exposure to ACM. The O & M plan is designed to protect workers and other building occupants who work around ACM. A good O & M plan will provide guidance for protection by (1) cleaning-up and repairing any existing contamination from past damage or disturbances, (2)

preventing further release of asbestos fibers through good work practices, and (3) maintaining asbestos in good condition through an effective program of monitoring the condition of ACM and repairing any damage. An O & M Program is proactive.

* All good O & M plans have common elements that include:

1. A Policy Statement
1. Labeling and Notification
2. Training
3. Employee Protection Programs
4. Medical Surveillance Program
5. Special Cleaning
6. Work Permit System
7. Special Work Practices
8. Exposure Monitoring
9. Emergency Response Programs
10. Periodic Surveillance
11. Record Keeping
12. Disposal Of ACM

Technical assistance to develop a complete plan may be needed from building staff, maintenance and custodial personnel, and other journeymen who may work at the facility. Architects, engineers, consultants, contractors, medical advisors, and legal counsel can also be good resources to develop the O & M Plan.

An Operations and Maintenance Plan, to be useful and understandable, must be site specific to each individual building. It should address *specifically* O & M cleaning, repair, and maintenance in areas of asbestos containing building materials (ACBM) at certain locations in the building. For instance, it should not be a general statement on worker protection but should be an ACBM specific statement on work practices and policy.

The O & M Program must be based on a complete and comprehensive building inspection designed to identify and locate *all* the ACBM in a building. Only with this important pre-requisite in place, will an O & M Program be successful in avoiding potential ACM exposure to people and resulting liability to the building owner.

Survey Summary

The O & M Program manual should include a summary of the asbestos survey information. It should include the types of material found to contain asbestos and the locations at which it is to be found. Schematic floor plan drawings can be very helpful in this section.

2. POLICY STATEMENT

Personnel Responsibilities

The success of the O & M plan depends on the active involvement and understanding of all parties. This may range from the facility administration to the manager of the asbestos program and the

building staff. Each facility must ensure all asbestos-related activities are done to comply with relevant federal, state, and local laws. To do this, each facility must designate a person to ensure compliance with relevant laws and the policies and procedures of the O & M manual. This person is known as the Asbestos Program Manager (APM).

In addition, each facility may provide support staff, including a response team, to assist the APM in carrying out his/her responsibilities. Below is a list of job responsibilities assigned for key personnel to develop and implement O & M plans.

Asbestos Program Manager

The APM, or designee, must implement the asbestos control program. As appropriate, responsibilities include the following:

* Manage the O & M plan; document, update and announce its activities.

* Notify *all* short-term and outside contractors of the presence, location and quantity of ACM in the facility, and all tenants occupying areas that contain ACM.

* Maintain and manage the documented inventory of ACM and its location.

* Review and approve/reject all work permit applications.

* Participate in the development, review, and monitoring of abatement project designs, and/or repair and alteration projects. Comply with relevant standards and laws when disturbing ACM.

* Ensure that asbestos projects are documented and record keeping complies with relevant laws and the O & M Manual.

* Seek technical direction and assistance from a qualified industrial hygienist or environmental services firm. This may be for the program development and implementation, inspection, and reinspection of ACM, and/or personnel training.

* **It is essential that the APM have the authority to enforce the O & M Program and the support of management to accomplish that.**

Response Team Leader

* Keep an inventory of equipment and supplies.

* Check warning labels and replace them as needed.

* Coordinate and report work and emergency practices.

* Assist the APM, or designee, with his/her duties.

Response Team

* Conduct OSHA Class III (small-scale, short duration) activities.
* Conduct initial and periodic cleaning.
* Respond to fiber release episodes.
* Conduct or help conduct periodic surveillance.
* Assist the APM, or designee, and response team leader with record keeping duties.

Consulting Staff

* Assist in development and implementation of O & M plan.
* Enhance the facilities asbestos program through consultation.
* Perform air monitoring when requested.

3. TRAINING

Federal and/or state OSHA regulations require training of any employee who may come in contact with, disturb, or clean up ACM.

A written plan is vital to provide step-by-step procedures and the documented intent at each facility. To implement and carry out a successful O & M program, a well-designed training program is needed.

Training provides an awareness of the presence of ACM, types of ACM, consequences of disturbing ACM, and proper work practices to minimize release of fibers. Also, training must alert people to the presence of management goals in dealing with ACM and proper procedures in the event of an emergency.

Below is a review of the three training levels which should be required for O & M programs.

OSHA Class IV Training (General Awareness Training)

OSHA requires this level of training for any employee who may come in contact with or clean up previously generated debris containing asbestos. OSHA training is required before an employee conducts this work and annually thereafter.

All custodial and maintenance personnel who work in a building containing ACM should have at least two hours of asbestos awareness training. This training should extend to temporary as well as permanent employees. Training topics include types and uses of asbestos, health effects of exposure, location of ACM in each building they work in, how to recognize damage/deterioration of ACM, the name and telephone number of the APM, or designee, and the availability and location of the facility's Asbestos Inspection Report. This training may be done by the APM or designee, or by an outside trainer. The training required by OSHA is described in EPA’s AHERA regulation at 40 CFR 763.92(a)(1).

OSHA Class III Training (Small-Scale, Short Duration Work)

Employees who conduct any activity that may result in the disturbance of ACM should complete an approved 16-hour training course. Topics should include the two-hour awareness, proper handling methods, personal protective equipment, applicable regulations, and hands-on training. A review examination of the training may be useful as a tool to encourage study and understanding of the subjects covered.

The training for each individual must be documented as to date, location, and length of training. This documentation should be preserved in permanent files and new employees must be trained prior to working with ACM. This training is defined in EPA's AHERA regulations at 40 CFR 763.92(a)(2).

Asbestos Program Manager (APM) Training

APMs should receive training in the health effects of asbestos exposure, detection, identification and assessment of ACM, options for controlling ACM, asbestos management programs, and relevant federal, state, and local laws. The extent of this training must be adequate to manage the asbestos issues at the site. It may be as brief as the 16 hour training, or as extensive as accredited courses under EPA's Model Accreditation Program. (It may be useful for the APM to receive training as an EPA Inspector and Management Planner, Project Designer or Contractor/Supervisor).

All training must be documented. Records of all training should be kept for an indefinite period.

Training records/forms must be kept for each person who takes any asbestos-related training. The list below contains training records which must be kept by each facility.

* For each employee taking the two-hour General Awareness Training complete the **General Awareness Training Form** or equivalent form.
* For each employee who completes the 16-hour training fill out a **Small-Scale Worker Training Form** or equivalent form.
* Regardless of the training taken, the APM, or designee should complete and sign an **Asbestos Management Coordinator Training Form** or equivalent form.

* Also, each facility should require proof of proper training for all outside contractors who handle or come in contact with asbestos in the facility. This documentation for training should be kept in permanent record keeping files for the facility.

AHERA training requirements are discussed in the EPA regulation 40 CFR 763.84 and 763.92. All facilities covered by AHERA should review this regulation to comply with training requirements. OSHA training requirements are found at 29 CFR 1926.1101(k)(9) as Class III and Class IV Training.

Note: Some states and/or local regulatory agencies may differ from these recommendations. Please seek consultation concerning this matter to ensure compliance with regulations.

4. EMPLOYEE PROTECTION

Each facility should develop and implement an employee protection plan to ensure safe work practices for employees handling ACM.

Respiratory Protection

OSHA at 29 CFR 1926.1101 requires respiratory protection when employee exposure levels exceed or may exceed the permissible exposure limit (PEL) as defined below:

* PEL includes the 8-hour time-weighted average limit (TWA) and the excursion limit (EL).
* TWA is defined as 0.1 f/cc averaged over eight hours.
* EL is defined as 1.0 f/cc measured for 30 minutes.

It is not always possible to know the exact employee exposure until after an O & M or small-scale project is done. Therefore, OSHA requires that an initial exposure assessment be conducted before a project begins, to determine any potential exposure to the workers involved (see OSHA at 29 CFR 1926.1101(f). Interim protection with at least a half-face, negative-pressure, air-purifying respirator, equipped with P100 filters should be required, along with protective clothing. A higher level of respiratory protection may be needed for some projects decided on a case-by-case basis.

However, these OSHA exposure levels are compliance triggers only and have no reference to "safe" levels of exposure, nor were they intended to. They are meant only to be levels which could be easily quantified or measured and therefore, demonstrated in a court of law if need be, to enforce a variety of mandated compliance issues.

To better protect workers from exposure and protect building owners and employers from liability, the stated intent of all good Respirator Protection Programs should be to protect workers to *at least* a maximum level of exposure calculated at 0.01 f/cc. The U.S. EPA AHERA regulation, although not mandatory for public and commercial buildings, requires that schools document a "final clearance" air sampling of at least this level before an asbestos abatement area may be reoccupied by unprotected building users.

Each facility should develop and implement a written respiratory program to comply with relevant federal, state, and local laws. The elements for an acceptable respiratory protection program are found at 29 CFR 1910.134©, and include:

1. Procedures for selecting respirators;
2. Medical evaluations of employees required to use respirators;
3. Fit testing procedures for employees required to use respirators;
4. Procedures for proper use of respirators;
5. Procedures and schedules for cleaning, storing and maintaining respirators;
6. Procedures to ensure adequate air for atmosphere-supplying respirators;
7. Training of employees in respiratory hazards;
8. Training of employees in use and limitations of respirators; and
9. Procedures for regular evaluation of the program.

The following OSHA regulations are mandatory as they apply to respirator use in asbestos O & M programs:

* 29 CFR 1910.134
* 29 CFR 1926.1101(h)
* 29 CFR 1926.1101(m)
* 29 CFR 1926.1101 Appendix D

Personal Protective Equipment

OSHA requires that respirators and protective clothing be used by any employee disturbing ACM (generating visible debris), unless a valid negative exposure assessment is documented for that particular job. This requirement does not extend to Class IV work.

In addition to respirators, each facility should provide and, under most conditions, require the use of protective coveralls, rubber boots or shoe covers, and gloves. Each facility should also provide and require the use of eye protection as needed. If the facility does not use disposable, single-use coveralls, they must abide by regulatory requirements for laundering contaminated clothing. These requirements include, but are not limited to, laundering clothing in such a manner that asbestos fibers are not released and notifying the person doing the laundering that the clothing is asbestos contaminated. The clothing must be transported in properly labeled, sealed, impermeable bags or containers. (See 29 CFR 1926.1101(I)). Although the use of launderable coveralls is allowed by Federal regulations, their use is not recommended. Complete decontamination of cloth is difficult to verify. It is therefore recommended that filtered, breathable coveralls be used, with a tested particulate holdout of at least 98% on 3–5-micron particulate.

Decontamination Procedures

Each facility should ensure that all workers perform proper decontamination procedures following all small-scale and/or O & M projects. These procedures may include, but are not limited to:

* Vacuuming. The worker must vacuum the disposable coveralls with an HEPA (high efficiency particulate air) vacuum. If a worker is wearing two suits, he/she should use a HEPA vacuum to decontaminate the outer suit and then remove it.
* Showering. Showering is not required by OSHA and may be used at the discretion of the APM. The worker will proceed to a shower to further decontaminate or to a room to change into street or work clothing.
* Disposal. In all cases, the worker will dispose of the coveralls and gloves as asbestos-contaminated waste.
* Respirator Care. The last item a worker will remove is the respirator. Respirators are decontaminated as follows:
    * Wipe off respirators with a damp cloth prior to removal.
    * Loosen straps and exhale as the respirator is removed.
    * Soak filters and dispose of asbestos contaminated waste.
    * Wash, dry, reassemble, and store respirator according to procedures outlined in each facility's written respirator program.

5. MEDICAL SURVEILLANCE

Medical surveillance is required under the OSHA Construction Standard at 29 CFR 1926.1101(m) for employees working with ACM. Where this regulation is more protective than 29 CFR 1910.134, it takes precedent over it.

Medical Surveillance is required:

* When employees conduct work for 30 or more days per year that may expose them at or above the PEL (0.1 f/cc); or
* When they are required to wear negative-pressure respirators.

To determine the need for medical surveillance for employees, each facility should provide an ongoing program of personnel air monitoring when employees perform asbestos work.

Each facility should ensure that employees participate in a medical surveillance program under the situations below:

* If an employee is handling ACM;
* If an employee, regardless of their job, meets the criteria specified by the Asbestos Construction Standard as described above; and
* If an employee, regardless of their job, meets the criteria specified by the Asbestos General Industry Standard, at 29 CFR 1910.1001 (l).

If an employee in the asbestos medical surveillance program has employment terminated for any reason, a final medical exam should be made available within thirty (30) days of termination. No termination exam is needed if the employee has completed an asbestos examination within the previous six (6) months.

Medical surveillance is conducted to comply with relevant federal, state, and local laws.

The following is an example of a written medical surveillance program which may be used to comply with the OSHA regulations, and which must be maintained on the site where the asbestos related O & M work takes place.

MEDICAL SURVEILLANCE PROGRAM

The Medical Surveillance Program for _____ consists of the following main elements:

1. Initial Examination
2. Annual Examination
3. Termination Examination
4. Signed opinion by physician
5. Employee medical record

1. Initial Examination

As required in the OSHA regulations at both 29 CFR 1926.1101 and 29 CFR 1910.1001, all employees who will be assigned to an occupation exposed to airborne asbestos must have an initial examination performed by a licensed physician.

The initial examination may cover the following items:

1. General medical history
2. Initial OSHA Medical Questionnaire
3. Respiratory Measurements
4. Anthropometric Measurements
    A. Height
    B. Weight
5. Vital Signs
    A. Blood Pressure
    B. Pulse
    C. Temperature
6. Ophthalmologic Screening
    A. Visual Acuity - near and far
    B. Color Vision
    C. Depth Perception
7. Urinalysis
8. Pulmonary Function Screen
    A. FEV-1, FVC, FEV1/FCV ratio
9. Chest X-ray
10. Complete physical exam by a licensed physician
11. Physician evaluation for respirator use clearance
12. Report of the medical evaluation.

A copy of the physician approval for occupational respirator use will be maintained on the job site and a copy of the medical exam will be given to the employee. All medical records will be filed and sorted in a safe place indefinitely and for a minimum of 30 years.

2. Annual Examination

All employees who may be exposed to airborne asbestos will undergo an annual medical examination, which will be the same as the Initial Examination, except for the OSHA questionnaire and the X-rays. The OSHA questionnaire will be the abbreviated form for use with annual examinations and the X-rays will be given every five years, except for those employees with 10+ years into the asbestos latency period and 35 to 45 years of age. This X-ray will be given every 2 years. All employees over 45 years of age must have the X-ray annually.

	Years since	Age of Employee:		
	1st exposure	15-35	35-45	45+
Frequency	0-10	every 5 yrs.	every 5 yrs.	every 5 yrs.
of X-rays	10+	every 5 yrs.	every 2 yrs.	annually

The annual signed physicians' opinion on fitness for work in a respirator in an asbestos environment will be maintained on the job site and a copy of the annual medical exam will be forwarded to the employee. All medical documentation will be stored and kept indefinitely for a minimum of 30 years.

3. Termination Examination

As per the OSHA standard at 29 CFR 1910.1001(1)(4)(I) and (ii), _____ will provide or make available a termination of employment medical examination for any employee who has been exposed to asbestos. The medical examination will be in accordance with the requirements of the periodic or annual medical examination and will be given, or made available, within 30 calendar days before or after the date of termination of employment.

4. Information provided to Physician

_____ will provide the following information to the examining physician:

1. A copy of the OSHA Regulations at 29 CFR 1926.1101 and Appendices D, E, and I.
2. A description of the employees' duties as they relate to asbestos exposure.
3. The employee's anticipated exposure level.
4. A description of any personal protective and respiratory equipment used.
5. Information from previous medical examinations not otherwise available to the physician.
6. Instructions to the physician not to reveal, in the written opinion given to the employer, specific findings or diagnoses unrelated to occupational exposure to asbestos, without a signed consent form from employee.

A copy of this information will be maintained in the company files and a reference to this information will be included in the medical file on each employee.

5. Physician's Written Opinion

_____ will establish, as a part of it's permanent records, a medical surveillance record on each employee. This record will be maintained for the duration of the employment, plus a minimum of 30 years. This record will be made available, upon written request, to OSHA, the affected employee, and former employees or their designated representatives. The employee medical record will contain at least the following information:

1. The name and social security number of the employee.
2. A copy of the employee's medical examination results, including the medical history, questionnaire responses, results of any tests and physicians recommendations.
3. Any employee medical complaints related to asbestos exposure.
4. A copy of or reference to the information provided to the physician by the employer.

Physician Information

This information is for compliance with the OSHA standard at 29 CFR 1926.1101(m)(3) and is to be used as a reference for all medical surveillance exams conducted for _____.

1. The employee's duties will be to work with asbestos containing building materials (ACBM) in an asbestos abatement setting. Various job descriptions are work area preparation, work inside the contaminated area (encapsulation, enclosure, removal), loading, transporting, and unloading of ACBM.

2. The employees' anticipated exposure level range will be from a trace (.001 f/cc) to an anticipated maximum of 10 f/cc. This exposure will vary with the task performed, but will mainly be below the PEL of 0.1 f/cc.

3. The personal protective equipment furnished with the employee will be a respirator, full body covering with disposable coveralls, latex gloves, and rubber boots. Hard hats will be issued when applicable. The respirator system used will be NIOSH approved for the work and will be well within the limits of the OSHA protection factor chart.

   The minimum respirator protection usually furnished by _____ is a half-mask air-purifying respirator equipped with P100 cartridges. If the fiber level in the ambient air in the work area ever elevates past 1 f/cc, the respiratory protection will be changed to a full-face air-purifying respirator.

4. According to federal regulations at 29 CFR 1926.1101(m)(4)(ii), the physician is to be instructed by the employer not to reveal in the written opinion given to the employer specific findings or diagnoses unrelated to occupational exposure to asbestos.

6. NOTIFICATION PROCEDURES

A notification program informs employees and building occupants about the presence of ACM in their facility. It shows the steps to take to avoid disturbing ACM. It also informs occupants and employees about what to do and who to contact in case of an asbestos-related emergency.

Notification of occupants can be done through letters, meetings and/or the posting of warning signs and labels. Warning signs and labels can be attached directly to ACM or posted to alert people to a hazard prior to entering an area. It is suggested that new employees receive this information during employee orientation. "Awareness" sessions like those discussed in Section 3 of this manual can also be used.

Each facility must also inform short-term workers and outside contractors who may come in contact with ACM, about the presence of ACM in the facility in which they are working. This step is necessary to avoid the disturbance of ACM during contracted activities, and to comply with the OSHA standard at 29 CFR 1926.1101(k)(2). OSHA requires that the building owner identify, quantify, and locate all ACM, and inform persons who may disturb the material before that disturbance takes place. OSHA holds the building owner responsible for employee exposure to asbestos in a facility, even though the employee does not work for him.

Notification Letters

Each facility should provide notification that complies with relevant federal, state, and local laws. Employees, tenants, and occupants should receive notification containing the details below:

* The presence and location of asbestos in their facility.

* The content, location, and availability of the Asbestos Inspection Report and O & M Plan.

* The health hazards associated with exposure to airborne asbestos fibers.

* The types of actions that could result in the release of asbestos fibers.

* The name, location, and phone number of the APM, or designee, in the event of damage or disturbance of ACM.

All contractors and short-term workers, including the telephone company, repair and utility workers and exterminators, are to be notified of the presence of ACM in the facility. The specific location of ACM in the areas where contractors and short-term workers are working is given along with instructions not to disturb any ACM. The APM, or designee, must be consulted prior to any disturbance of ACM. The contractor and short-term workers should sign the Contractor Notification Form, or equivalent form and the Short-term Worker Notification Form, or equivalent form, stating that they have been informed of ACM.

Each facility should instruct the appropriate contractors that no ACM may be installed without prior written approval of the APM, or designee. The contractor must sign a statement certifying that the products they used and/or installed are non-asbestos-containing materials. A Non-Asbestos-Containing Material Certification Form, or equivalent form, is to be signed by each contractor prior to installing products within the facility. This information will save subsequent testing and sampling prior to future maintenance, renovation, and demolition projects that affect this material.

Signs

Danger signs must be posted in regulated areas, as required by OSHA, any time disturbance of ACM is about to take place. To comply with this requirement, each facility must post warning signs at each entrance and exit to an area where O & M activities involving ACM are taking place. O & M activities include initial cleaning, repair, small-scale removal, and emergency response cleanup, regardless of the fiber contamination level.

Warning signs must comply with all relevant federal, state, and local laws and must bear the following:

DANGER
ASBESTOS
CANCER AND LUNG DISEASE HAZARD
AUTHORIZED PERSONNEL ONLY

(And where it is required, the sign will also include)

RESPIRATORS AND PROTECTIVE CLOTHING ARE REQUIRED IN THIS AREA

In cases where warning signs are posted because of fiber contamination levels, each facility should document:

* The location of warning signs.
* The extent of the contamination.
* The length of time the signs were posted.
* The corrective action taken to reduce contamination levels; and
* Proof of the action's effectiveness (i.e., air samples).

Signs must also be posted at the entrance to any mechanical area, warning of the presence of ACM, with instructions on who to contact before working in the area.

Labels

Each facility should attach warning labels on all mechanical system insulation that has not been sampled and proven not to contain asbestos. In addition, all suspect asbestos containing materials in routine maintenance areas should be labeled:

DANGER
CONTAINS ASBESTOS FIBER
AVOID CREATING DUST
CANCER AND LUNG DISEASE HAZARD

All labels must be clearly visible. Labels should be attached at the beginning and end of each continuous pipe run and at least every 75 feet. Extra labels should be required at each valve, flange, or change in direction. Each time a pipe passes through a wall, floor, or ceiling a label should be posted on each side of the penetration.

SAMPLE NOTIFICATION LETTER

Dear Occupants:

As you may be aware, this facility has had an asbestos survey completed and an O & M Program developed. The survey documents the areas that have asbestos containing materials (ACM), and the O & M Program provides the guidance needed to maintain ACM in good condition until its eventual removal. This survey and O & M Program are in the Asbestos Program Manager's office and is available during office hours to anyone for review.

Inhalation of asbestos fibers can be harmful. However, when ACM is maintained in good condition, the potential hazard diminishes, and ACM may be kept in place for the life of the building or until renovation could disturb it.

To avoid exposure, it is **important** to: **(1)** know what types of materials may contain asbestos; **(2)** avoid damaged areas; and **(3)** contact the building management when damaged areas are found so the problem can be immediately remedied. Common applications of asbestos in buildings have included spray-applied fireproofing, soundproofing, or thermal insulation, acoustic plaster soundproofing or ceiling tiles, pipe insulation, asbestos cement products (transite), floor tile and mastic, vinyl sheet flooring and backing, and roofing materials.

Most buildings contain some of these materials, but it is important to realize that not all of them contain asbestos. The survey pinpoints ACM and their locations throughout the building.

To prevent potential release of asbestos fibers, the Asbestos Program Manager must approve any activity that may disturb these materials.

Please call management concerning any damaged areas.

When feasible, we will continue the process of removing asbestos containing materials. All work is done to comply with relevant federal and state laws. Much of the work is done during off hours to further protect building occupants from exposure.

Should you have any questions or comments, please contact the building management.

7. PERIODIC SURVEILLANCE AND REINSPECTION PROGRAM

An important aspect of the O & M program is visual monitoring of ACM, done at set intervals. The purpose of the monitoring is to detect damage or deteriorated ACM as early as possible so that corrective action can be taken.

Custodial and maintenance personnel are instructed to observe the condition of ACM in their area. They are also instructed to report any damage to their supervisor and the APM, or designee, as soon as possible.

Periodic Surveillance

Although no formal training is required by regulatory agencies, it is recommended that person(s) conducting the periodic surveillance receive training and experience beyond the general awareness training. This may include EPA Inspector/Management Planner certification and training on interpreting the facility's Asbestos Assessment Study.

Periodic surveillance documents the condition of all ACM by using a Periodic Surveillance Form. A copy of the form is submitted to the APM, or designee. Periodic surveillance should be done at least every 6 months. This may be more frequent depending on such factors as accessibility, area use, and the type of ACM present.

Schools covered by AHERA are subject to special surveillance programs. The APM, or designee, should consult 40 CFR 763.92(b), for more details.

Reinspection

A complete reinspection of the facility by an accredited Inspector/Management Planner should be accomplished every 3 years and the O & M Plan updated at that time. This reinspection is necessary to keep the O & M Plan updated as to any response actions that may have occurred, and to address any change in the condition of ACBM. Any change in use of an area containing ACM or use of the functional space that contains the ACBM should be noted for purposes of assessment.

In February 1992, EPA published a useful checklist guide for reinspection’s titled "A Guide to Performing Reinspection Under The Asbestos Hazard Emergency Response Act (AHERA)" (EPA 77/B-92/001). The guide may be obtained by calling EPA's Toxics Hotline at (202) 554-1404.

8. EXPOSURE MONITORING

Air monitoring can be a useful tool to further evaluate the condition of ACM and its potential to release asbestos fibers. Air sampling, when done correctly, may provide early warning about any deterioration of ACM. To be meaningful, air monitoring is done over a long period of time throughout the entire building under normal use conditions.

Periodic Area Monitoring

Periodic air monitoring in a building is merely a supplement to an ACM surveillance program. Each facility may conduct periodic monitoring in buildings with friable ACM found in conjunction with air plenums, in areas of significant air movement, and in areas with significant vibration.

Air sampling is recommended on a regular basis, appropriate for the specific conditions as referenced above. The samples may be analyzed using either phase contrast microscopy (PCM) or transmission electron microscopy (TEM), or a combination of both. Each method has advantages and disadvantages.

	Advantages	Disadvantages
PCM	Standardized procedures Quick (less than 1 hour) Less Expensive	Sees only long &/or fat fibers; Can't distinguish between asbestos and non-asbestos fibers
TEM	Standardized procedures Sees thin &/or short fibers Distinguishes between asbestos and non-asbestos fibers	Slow (more than 6 hours) Expensive

Employee Exposure Monitoring

Each facility should provide an employee exposure monitoring plan to comply with relevant federal, state, and local laws. Although OSHA allows the use of previously generated data (see 29 CFR 1926.1101(f)) in place of actual employee air monitoring, air monitoring of employees should be done in order to better design work practices which not only protect the employee from exposure, but also protect the facility from potential contamination. The data, which this air monitoring generates, should be preserved in the permanent record in order to protect the employer or building owner from any future liability. However, even though employee air monitoring is done, a formal negative exposure assessment must document each disturbance or clean up of ACM.

9. WORK PERMIT SYSTEM

Each facility should implement a "work permit" program to control indiscriminate disturbance from maintenance, renovation, and remodel work. It is also recommended that a "work permit" program be designed to control other asbestos-related activities. A sample program is outlined below. If the facility contracts for asbestos-related activities, this task could be included in the bid specification and/or contract documents. The APM, or designee, may choose another person to assist in implementation and coordination.

The "work permit" system requires any person doing work impacting building materials in the facility to submit a Job Request Form, or equivalent form, to the APM, or designee, prior to doing any work. This form would identify the specific personnel who do the work, including outside contractors, and would describe:

* the time and location of the job in question;

* the type of job; and

* any known information about the presence of ACM.

Once the APM, or designee, receives the Job Request Form, the steps below are taken:

* Review data. Review the Asbestos Inspection Report and any other records to determine whether or not any asbestos will be affected by the job. If ACM is unlikely to be disturbed, the APM, or designee, will note the presence of ACM on the form. The APM, or designee, will instruct the proper people not to disturb the ACM and the steps to take in the unlikely event of a disturbance.

* Visit the site. Make a site visit of the proposed work if it is determined that ACM is present and likely to be disturbed. The APM, or designee does the site visit.

* Plan work practices. Comply with the O & M plan and all relevant federal, state, and local laws to minimize disturbance of ACM. If not found in the O & M manual, document the work practices to be used and add them to the O & M plan. New procedures must comply with all aspects of the O & M plan and relevant laws.

* Record information. Use a "Maintenance Work Authorization Form", or equivalent form, and send to the proper personnel. Provide a copy to any outside contractor involved in the work.

* Revisit the worksite. Visit the work site during the job. Document any observations on an "Evaluation of Work Form", or equivalent form. See that the work practices being used comply with the OSHA standard at a minimum.

* Filing. Place a copy of the forms listed above in the permanent files.

This work permit system is the key to avoiding accidental exposure to workers or contamination of the facility. It is therefore essential that the APM have the authority to enforce the program.

10. RECORD KEEPING

The purpose of record keeping is to document information regarding each facility's O & M activities. A well-maintained and organized system of record keeping will demonstrate that the health and safety of those working or visiting each facility was not compromised.

A benefit of a comprehensive, organized record keeping program is that renovation of a facility is easier because of historical documentation. Also, the complex legal issues involved with asbestos make record keeping especially important.

Each facility should keep the following, or equivalent, records:

ACTIVITY	RECORDS
O & M work done by outside Contractors	Copy of training documents Copy of Respirator Protection Program Copy of Medical Surveillance Program Final Clearance Documentation
Notification to occupants	Copy of notification letter or minutes, etc.
Notification to short-term Workers	Short-term Notification Record Everything listed for outside contractors
Training	OSHA Class IV (General Awareness) OSHA Class III (Small-scale, short duration work) Respirator Training Hazard Communication Training
Medical Surveillance	Physician's Written Opinion Name & SSN of employee Employee complaint, re-exposure Copy of information to physician
Respiratory Protection	Copy of training program Respirator Inspection Form Fit-test Record Copy of Respirator Protection Program
Periodic Surveillance	Periodic Surveillance Record
Re-Inspections	Re-inspection Record and Report
O & M Activities	Job Request Form Job Authorization Form Visual Inspection Report Notification to Regulators
Emergencies	Emergency Record
Fiber Release Episodes	Fiber Release Record
Transportation of Waste	Chain-of-custody Form Dump Receipts Hazardous Waste Manifest

Each facility also keeps records of all major abatement operations such as enclosure, encapsulation, and removal. The asbestos consultant and/or the abatement contractor may supply these records. The records below may be kept as part of abatement records:

* The contract documents including specifications, RFPs, and scope of work;

* The abatement contract qualifications;

* The abatement contractor submittals, including those specified in contract documents;

* The asbestos consultant qualifications;

* The asbestos laboratory qualifications including QA/QC plans;

* The results of analysis of all air samples;

* Contractor logbooks;

* The laboratory QA/QC records; and

* All final reports from consultant.

The APM, or designee, is responsible for keeping records. The APM, or designee, may need the assistance of clerical and maintenance staff to fulfill record keeping duties. At minimum, record keeping must meet relevant federal, state, and local laws.

	RECORDS	RETENTION
*	Medical surveillance	Employment + 30 years
*	Air Sampling/Employee Exposure Monitoring	30 years
*	Training	Employment + year (Recommended: 30 years)
*	Respiratory Protection (Inspections, fit-tests, and training)	30 years
*	All other records	30 years

Schools covered by AHERA are subject to additional record keeping requirements. The APM or designee should consult 40 CFR 763.94 for more information.

SAMPLE FORMS

TABLE OF CONTENTS

Page

Class IV (General Asbestos Awareness) Training Form 23

Class III (Small-Scale Worker) Training Form 24

Contractor Notification Form 25

Short-Term Worker Notification Form 26

Periodic Surveillance Form 27

Job Request Form 28

Maintenance Work Authorization Form 29

ACM Work Evaluation Form 30

Initial and Periodic Cleaning Form 31

Fiber Release Episode Report 32

Respirator Training Record 33

Medical/Safety Letter 35

Medical Authorization for Respirator Use 38

CLASS IV (GENERAL ASBESTOS AWARENESS)
TRAINING FORM

LOCATION OF TRAINING:

DATE OF TRAINING:

TRAINING PROVIDER:

DURATION FOR TRAINING PROVIDED:

LIST OF PEOPLE WHO ATTENDED THIS TRAINING

Print Name	Signature	Job Title

I, _____, the Asbestos Program Manager, or appointed designee, acknowledge that the above-listed people did attend this training.

SIGNATURE:_____ DATE:
Asbestos Program Manager (or appointed designee)

FACILITY:_____ APM:
(Print or type)

CLASS III (SMALL-SCALE WORKER)
TRAINING FORM

LOCATION OF TRAINING:

DATE OF TRAINING:

TRAINING PROVIDER:

DURATION FOR TRAINING PROVIDED:

LIST OF PEOPLE WHO ATTENDED THIS TRAINING

Print Name	Signature	Job Title

I, _____, the Asbestos Program Manager, or appointed designee, acknowledge that the above-listed people did attend this training.

SIGNATURE:_____ DATE:
Asbestos Program Manager (or appointed designee)

FACILITY:_____ APM:
(Print or type)

CONTRACTOR
NOTIFICATION FORM

To comply with relevant federal and state laws, and the Facilities Operations and Maintenance Policies and Procedures, Facility will provide the Contractor with data regarding the locations of asbestos-containing material (ACM). This will be done prior to the Contractor entering any building under the facility's jurisdiction.

Please complete this form and return to:

I,_____, representing and having authority for (company), hereby indicate and agree that a representative of _____ (name and title), has provided me information regarding the specific locations and materials that are asbestos-containing and which may be encountered or have the potential of being encountered during the course of activities on project _____(name or number) in (building).

I agree that neither I, nor any of my employees, agent, subcontractors, or other individuals or entities over whom I have any responsibility or control will disturb ACM as found in the Asbestos Survey for the above-mentioned building.

I further understand and agree that should I, my employees, agents, subcontractors or other individuals or entities over whom I have control, encounter any material(s) suspected of containing asbestos, said material(s) shall not be disturbed without first notifying the agency's Asbestos Program Manager, or appointed designee, and receiving approval that such material may be disturbed.

_____ _____

Print Name Signature

_____ _____

Company _____ Position_____

Date _____

SHORT-TERM WORKER
NOTIFICATION FORM

FACILITY:

BUILDING NAME OR NUMBER WHERE WORK IS TO BE PERFORMED:

DESCRIPTION OF WORK TO BE PERFORMED:

DATE WORK TO BE PERFORMED:

NAME OF PERSON PERFORMING WORK:

I have reviewed the facility's Asbestos Survey regarding the location(s) of asbestos-containing material (ACM) and have been cautioned against any disturbance and damage of these materials.

If my work requires the disturbance or damage of any ACM, or if I accidentally disturb or damage the material, I will stop my work and immediately inform the Asbestos program manager, or appointed designee.

_____ _____

Print Name Signature

_____ _____

Company _____ Position_____

Date _____

PERIODIC SURVEILLANCE FORM

BUILDING INFORMATION:

Building Number: _____Building

Name:

Location:

AREA INFORMATION:

Number: _____ Location:

Changes in Condition:

MATERIAL INFORMATION:

COMMENTS:

INSPECTED ON:_____ BY:_____ (Please Print)

SIGNATURE:_____ :

JOB REQUEST FORM

SUBMIT APPLICATION TO ASBESTOS PROGRAM MANAGER, OR APPOINTED DESIGNEE. DO NOT BEGIN WORK UNTIL AUTHORIZATION IS RECEIVED.

NAME: _____ DATE: _____

NUMBER: _____ REQUEST NUMBER: _____

START DATE: _____

ANTICIPATED FINISH DATE: _____

LOCATION OF WORK: _____

WILL ASBESTOS-CONTAINING MATERIALS BE AFFECTED? ___ YES ___ NO

NAME AND TELEPHONE NUMBER OF SUPERVISOR: _____

APM COMMENTS: _____

SIGNATURE: _____ DATE: _____
Asbestos Program Manager
(or appointed designee)

FACILITY: _____ APM: _____
(Print or type) (Print or type)

MAINTENANCE WORK
AUTHORIZATION FORM

FACILITY: _____ NO. _____

AUTHORIZATION IS GIVEN TO PROCEED WITH THE FOLLOWING MAINTENANCE-WORK:

PRESENCE OF ASBESTOS-CONTAINING MATERIAL (ACM):

___ ACM IS NOT PRESENT IN THE VICINITY OF THE MAINTENANCE WORK
___ ACM IS PRESENT BUT DISTURBANCE IS UNLIKELY. HOWEVER, IF CONDITIONS CHANGE, THE APM WILL RE-EVALUATE THE WORK REQUEST PRIOR TO PROCEEDING.
___ ACM IS PRESENT AND MAY BE DISTURBED.

THE FOLLOWING WORK PRACTICES SHALL BE EMPLOYED TO AVOID OR

MINIMIZE DISTURBANCE OF ACM: _____

_____

THE FOLLOWING PROTECTIVE EQUIPMENT SHALL BE USED/WORN DURING THE

WORK TO PROTECT WORKERS: _____

SPECIAL PRACTICES AND/OR EQUIPMENT REQUIRED: _____

_____

SIGNATURE: _____ DATE: _____
Asbestos Program Manager
(or appointed designee)

ACM WORK
EVALUATION FORM

FACILITY:

LOCATION OF WORK PERFORMED:

DATE OF WORK: APPROVAL FORM NO:

DESCRIPTION OF WORK:

EVALUATION OF WORK PREFORMED:

EVALUATION OF EQUIPMENT & PROCEDURES TO PROTECT WORKERS:

AIR SAMPLE RESULTS

NAME: _____ RESULTS:

NAME: _____ RESULTS:

NAME: _____ RESULTS:

STORAGE LOCATION:

DISPOSAL SITE: DATE:

SIGNED:_____ DATE:

Asbestos Program Manager
(or appointed designee)

INITIAL AND PERIODIC
CLEANING FORM

FACILITY:

BUILDING NAME:

TYPE OF CLEANING: _____ INITIAL _____ PERIODIC _____ OTHER

NAME OF PEOPLE PERFORMING CLEANING:

CLEANING METHODS (CHECK METHODS USED)

___ HEPA VACUUMED ___ WET METHODS ___ PROPER DISPOSAL

___ PROTECTIVE EQUIPMENT USED

WRITTEN DESCRIPTION OF CLEANING METHODS:

LOCATION OF CLEANING:

RESPONSE TEAM LEADER CERTIFIES THAT THE ABOVE CLEANING WAS DONE TO COMPLY WITH THE RELEVANT FEDERAL AND STATE LAWS AND THE FACILITIES MANUAL.

_____	_____	_____
Print Name	Signature	Date

CONTRACTOR REPRESENTATIVE CERTIFIES THAT THE ABOVE CLEANING WAS DONE TO COMPLY WITH THE FACILITIES CLEANING SPECIFICATIONS/ REQUIREMENTS.

_____	_____	_____
Print Name	Signature	Date

Asbestos Program Manager:

_____	_____	_____
Print Name	Signature	Date

FIBER RELEASE EPISODE (UNCONTROLLED RELEASE)
REPORT

FACILITY:

LOCATION OF FIBER RELEASE (BUILDING NAME, ADDRESS, ROOM NUMBER):

NAME OF PERSON REPORTING THE RELEASE:

DATE OF RELEASE:

DESCRIBE THE EPISODE:

DESCRIBE CLEAN-UP PROCEDURES:

NAME OF PERSON(S) CLEANING UP RELEASE:

ARE THEY CERTIFIED ASBESTOS WORKERS? ____ YES ____ NO

IF YES, WHAT ARE THE CERTIFICATION NUMBERS?

Signed:_____ Date: _____

Asbestos Program Manager
(or appointed designee)

RESPIRATOR TRAINING RECORD

Employee Name: _____ Date: _____

The following has been discussed with me:

1. The nature of the respiratory hazard.
2. Why engineering controls cannot be used in place of respiratory equipment.
3. The reasons why I must wear the respirator, and the disciplinary actions that will be taken for intentional incorrect wear.
4. What type of respirator will be used for particular hazards.
5. The limitations and capabilities of each respirator.
6. Purpose of the medical evaluation to determine authorization for respirator use.
7. The conditions that prevent a good face seal.
8. The necessity of wearing the respirator as instructed, without modification.
9. Recognizing and handling emergency situations when wearing a respirator.

I have been instructed in the following:

1. How to wear a respirator.
2. How to adjust a respirator.
3. How to determine a proper fit and to perform a fit-check every time I put on a negative-pressure, air-purifying respirator.
4. How to inspect the respirator.
5. How to clean the respirator.
6. How to store the respirator.

I understand the above items concerning respirator use, care, and inspection.

_____	_____	_____
Signature	Date	Witness

Make and Model of respirator:

Type of Mask:

Fit-Testing Method	Respirator Size
____ Quantitative Fit Test	____ Small
____ Banana Oil Test	____ Medium
____ Irritant Smoke	____ Large
___ Saccharin Test	
____ Positive-Pressure Fit-Check	
____ Negative-Pressure Fit-Check	

_____	_____
Employee's Signature	Fitter's Signature

MEDICAL/SAFETY LETTER

To Whom It May Concern:

The following is a description of our employee's duties as they relate to the employee's exposure to airborne asbestos.

_____ is a _____ in our facility's maintenance department.

His/Her primary asbestos-related job duties include the following:

* Small-scale, short-duration activities.
* Minor fiber release episode clean-ups.
* Initial cleaning.

OSHA Class III (small-scale, short-duration) Activity:

Our employee may perform small-scale, short-duration asbestos abatement activities. Normally, this work involves tasks such as, but not limited to:

* Removal, encapsulation, enclosure, or repair of asbestos-containing materials in small quantities.
* Replacement of asbestos-containing gaskets on valves and other items.
* Installation of electrical conduits or other items through or proximate to asbestos-containing materials.

The anticipated exposure levels while working on small-scale, short-duration activities is expected to be below 0.1 fibers per cubic centimeter (f/cc) based on an 8-hour TWA. Of course, our employees are required to wear a negative-pressure respirator and disposable coveralls, at a minimum, every time that they handle ACM.

Minor Fiber Release Episodes:

Our employee may perform clean-up of minor fiber releases. The anticipated exposure levels while cleaning up a minor fiber release episode is expected to be below 0.1 f/cc based on an 8-hour TWA. Our employees are required to wear, at a minimum, a negative-pressure respirator and disposable clothing while performing this work.

Initial Cleaning:

Our employee may perform initial cleaning in buildings with friable ACM. The anticipated exposure levels while clean-up of a minor fiber release episode is expected to be below 0.1 f/cc based on an 8-hour TWA. Our employees are required to wear, at a minimum, a negative-pressure respirator and disposable clothing while performing this work.

If information from the previous medical examination of the employee is available, this information will be brought to the exam with the employee.

A copy of the following OSHA regulations has also been provided:

* 29 CFR 1926.58
* Appendix D
* Appendix E
* Appendix I

Important note to physician: To comply with regulation 1926.58 of OSHA, the physician shall not reveal in the written opinion given to the employer, specific findings or diagnoses unrelated to occupation exposure to asbestos, tremolite, anthophyllite, or actinolite.

If you have any questions or concerns regarding this information, please contact me at the below address or phone:

Name _____ Phone _____

Street _____ City _____

State _____ Zip _____

Agency _____ Facility _____

==========

Documentation

Name of Clinic _____ Phone _____

Street _____ City _____

State _____ Zip _____

Signature of Clinic Representative _____ Date _____

Signature of Employee _____ Date _____

MEDICAL AUTHORIZATION FOR RESPIRATOR USE

Employer:

Employee: Social Security Number:

Date of Birth:

Supervisor Department

Circle Types of Respirator(s) to Be Used:

Atmosphere-supplying respirator	Continuous-flow respirator
Open-circuit SCBA	Closed-circuit SCBA
Supplies-air respirator	Combination air-line SCBA
Air-purifying (non-powered)	Air-purifying (powered)

Level of Work Effort (Mark one)
____ Light ____ Moderate ____ Heavy ____ Strenuous

Extent of Use

1. On a daily basis
2. Occasionally - but more than once a week
3. Rarely - or for emergency situations only

Length of Time of Anticipated Effort in Hours:

Special Work Considerations (i.e., high places, temperature, hazardous material, protective clothing, etc.) If none, state "none".

_____ _____
Asbestos Program Manager Signature Date
(or appointed designee)

Employee:

Have you ever worn a respirator before? ____ Yes ____ No

If yes, describe any difficulties noted with respirator use:

_____ _____
Employee Signature Date

MEDICAL AUTHORIZATION FOR RESPIRATOR USE (CONT.)

Physician's Evaluation:

CLASS: (Circle)
1. No Restrictions on respirator use
2. Some specific use restrictions
3. No respirator use permitted

Restrictions:

Examining Physician's Signature: _____ Date: _____

11. WORK PRACTICES

Work practices in each of the three areas addressed in this section should be specific to the ACBM located in the facility, and to the functional spaces (room/area) which contain the ACBM.

A. Special Cleaning

All initial and periodic or additional cleaning areas of friable or damaged ACBM must be done with wet methods, HEPA vacuums, steam cleaners or a combination of those methods. The training program should impress on the maintenance and custodial staff the importance of *never* using conventional vacuums to clean up asbestos contaminated debris, and *never* dry sweep or dust in contaminated environments. Initial cleaning should be done in protective coveralls and respirators, with proper decontamination procedures being followed upon completion. All waste or debris should be treated as asbestos and properly disposed of. For regulatory guidance, see AHERA at 40 CFR 763.91(c) and OSHA at 29 CFR 1926.1101(g)(10) and (l)(1)&(2).

These special cleaning procedures will also apply to any clean up after an uncontrolled fiber release episode.

B. Emergency Response

An accidental contamination or "fiber release episode" may be addressed in one of two ways, depending on the size of the episode. For small or "minor" fiber release episodes (i.e., the falling or dislodging of 3 square or linear feet or less of friable ACBM), the custodial or maintenance people trained in the 16-hour O & M procedures may address cleanup in the following manner:

1. Turn off the HVAC system in the area.
2. Thoroughly saturate the debris.
3. Clean the area using the methods mentioned in A above.
4. Dispose of all debris as asbestos using the methods in Chapter 11.
5. Immediately repair the damages to the ACBM.

For larger or "major" fiber release episodes (i.e., the falling or dislodging of more than 3 square or linear feet), the custodial or maintenance people trained in the 16-hour O & M procedures may only:

1. Restrict entry in the area and post signs.
2. Turn off the HVAC system.
3. Contact the accredited outside contractor or in-house emergency response team.

The clean-up of a major fiber release episode should include planning, special work practices (see OSHA at 29 CFR 1926.1101), final clearance documentation, and record keeping of a major asbestos abatement project.

C. Maintenance Work Practices

The user of this document should be familiar with all the major federal requirements for conducting asbestos related maintenance work (OSHA 29 CFR 1926.1101(g)(9) &(10); AHERA 40 CFR 763, Subpart E, Appendix B; NESHAP 40 CFR 61.145 and 61.150 where applicable) and design his work procedures within the intent of these rules and guidelines. If more stringent safeguards are needed to protect workers and the facility, they should be researched and implemented.

An enormous amount of this research specific to O & M work procedures has already been completed by a panel of over 100 experts under the guidance of the National Institute of Building Sciences (NIBS). NIBS has produced a "Guidance Manual, Asbestos Operations and Maintenance Work Practices" which details approximately 125 O & M work procedures step by step. Also included are sections on Asbestos Program Manager and asbestos worker procedures preparatory to these work practices. To duplicate any of this work here would be redundant and probably inadequate, as the work procedures must necessarily be specific to both the ACBM being addressed and the exposure element involved.

The APM is urged to obtain a copy of the NIBS guide and use it in the design and execution of the work to be addressed at each particular site. NIBS may be contacted at: National Institute of Building Sciences, 1201 L street, N.W., Suite 400, Washington, DC 20005, or by telephone at (202) 289-7800.

12. DISPOSAL/STORAGE REQUIREMENTS

The following section explains the federal requirements for storage and disposal of asbestos-containing waste. Although the federal regulations will not normally apply to maintenance amounts of generated asbestos waste, they should be used as guidelines for liability management. ***Please consult with the state and local regulatory agencies if more stringent requirements apply.***

1. GENERATOR REQUIREMENTS

The term "Generator" refers to the owner or operator of the facility or the owner or operator of the demolition/renovation operator or both. The generator is legally responsible and liable for the proper handling, storage and disposal of all ACM abated from the building(s) and/or property. Refer to the NESHAP requirements at 40 CFR 61.150 for the federal requirements.

2. HANDLING OF ASBESTOS WASTE

The generator must discharge no visible emissions during collection, processing, packaging, or transportation of the waste. To accomplish this requirement, the generator must adequately wet the waste material and seal it while wet in leak tight containers or wrapping. The containers must be labeled with the following 3 labels:

(OSHA)

DANGER
CONTAINS ASBESTOS FIBERS
CANCER AND LUNG DISEASE HAZARD
AVOID BREATHING AIRBORNE ASBESTOS FIBERS

(DOT)

RQ ASBESTOS
NA 2212
CLASS 9

(EPA)

Name and address of generator
(site specific)

Although not specified by federal law, 6 mil. poly bags are normally used where applicable as a minimal level of compliance.

3. DISPOSAL

All asbestos-containing waste should be deposited as soon as is practical at a waste site approved by the state NESHAP agency. Vehicles used to transport the waste must be marked during loading and unloading with the following sign:

DANGER
ASBESTOS DUST HAZARD
CANCER AND LUNG DISEASE HAZARD
AUTHORIZED PERSONNEL ONLY

4. ON-SITE STORAGE

In some instances, the generator cannot arrange for prompt off-site transportation of the asbestos waste. Also, it may not be economically feasible for a generator to provide transportation until substantial waste has been generated. However, there may be local regulations which govern how long the waste may be stored on-site. The limit for storing waste on-site in most states is 3 months to one year beginning on the date the asbestos waste is generated. It is advisable, but not required, to place the disposal bags in impermeable containers (i.e., steel, fiberboard, or fiberglass drums). The date of generation should be marked on the outside of the containers. If the storage vessels are also deemed for disposal, the appropriate labels must be affixed to the outside of the container.

5. WASTE SHIPMENT RECORD

A "Waste Shipment Record" must be sent with the waste transporter to the disposal site, containing the following information:

A. Name, address, and telephone of Generator
B. Name and address of local NESHAP authority
C. Approximate quantity in cubic yards
D. Name and telephone of disposal site operator
E. Name and site location of disposal site
F. Date transported
G. Name, address, and telephone of transporter
H. Certification of compliance

If a signed copy is not received back from the disposal site within 35 days, the transporter, and/or disposal site must be contacted for information. If the signed copy is then not received within 45 days of shipment, the local or regional EPA must be contacted in writing. All waste shipment records must be retained for at least 2 years. An example of a waste shipment records form and instructions are provided.

Waste Shipment Record

(1) Work Site Name _____ Mailing Address _____

Owner's Name _____ Owner's Telephone Number _____

(2) Operator's Name and address _____ Operator's Telephone Number _____

(3) Waste Disposal Site (WDS) Name and Mailing Address _____

Physical Site Location _____ WDS Telephone Number _____

(4) Name, and address of responsible agency _____

(5) Description of Materials _____

(6) Containers: Number and type _____

(7) Total quantity m^3 (yd^3) _____

(8) Special handling instructions and additional information: _____

(9) Operators Certification: I hereby declare that the contents of this consignment are fully and accurately described above by proper shipping name and are classified, packed, marked, and labeled, and are in all respects in proper condition for transport by highway according to applicable international and government regulations.

Printed/typed name & title _____ Signature _____ Date _____

(10) Transporter 1 (Acknowledgment of receipt of materials):

Printed/typed name & title _____ Signature _____ Date: _____

Address and telephone number _____

(11) Transporter 2 (Acknowledgment of receipt of materials)

Printed/typed name & title _____ Signature _____ Date _____

Address and telephone number _____

(12) Discrepancies: _____

(13) Waste disposal site owner or operator: Certification of receipt of asbestos materials covered by this manifest except as noted in item 12.

Printed/typed name & title _____ Signature _____ Date _____

Instructions

Waste Generator Section (Items 1-9)

1. Enter the name of the facility at which asbestos waste is generated and the address where the facility is located. In the appropriate spaces, also enter the name of the owner of the facility and the owner's phone number.

2. If a demolition or renovation, enter the name and address of the company and authorized agent responsible for performing the asbestos removal. In the appropriate spaces, also enter the phone number of the operator.

3. Enter the name, address, and physical site location of the waste disposal site (WDS) that will be receiving the asbestos materials. In the appropriate spaces, also enter the phone number of the WDS. Enter "on-site" if the waste will be disposed of on the generator's property.

4. Provide the name and address of the local, state, or EPA regional office responsible for administering the asbestos NESHAP program.

5. Indicate the types of asbestos waste materials generated. If from a demolition or renovation, indicate the amount of asbestos that is:

    * Friable asbestos material
    * Non-friable asbestos material

6. Enter the number of containers used to transport the asbestos materials in item 5. Also enter one of the following container codes used in transporting each type of asbestos material (specify any other type of container used if not listed below):

    * DM - Metal drums, barrels
    * DP - Plastic drums, barrels
    * BA - 6 mil plastic bags or wrapping

7. Enter the quantities of each type of asbestos material removed in units of cubic meters (cubic yards).

8. Use this space to indicate special transportation, treatment, storage, disposal, or bill of lading information. If an alternate waste disposal site is designated, note it here. Emergency response telephone numbers or similar information may be included here.

9. The authorized agent of the waste generator must read and then sign and date this certification. The date is the date of receipt by transporter.

*NOTE: The waste generator must retain a copy of this form.

Transporter Section (Items 10 & 11)

10,11. Enter the name, address, and telephone number of each transporter used, if applicable. Print or type the full name and title of the person accepting responsibility and acknowledging receipt of materials as listed on this waste shipment record for transport. Enter date of receipt and signature.

* NOTE: The transporter must retain a copy of this form.

Disposal Site Section (Items 12 & 13)

12. The authorized representative of the WDS must note in this space any discrepancy between waste described on this manifest and waste received as well as any improperly enclosed or contained waste. Any rejected materials should be listed, and the destination of those materials provided. A site that converts asbestos-containing waste material to non-asbestos material is considered a WDS.

13. The signature (by hand) of the authorized WDS agent includes acceptance and agreement with statements on this manifest except as noted in item 12. The date is the date of signature and receipt of shipment.

Note: This WDS must retain a completed copy of this form. The WDS must also send a completed copy to the operator listed in item 2.

13. COST ESTIMATES OF CLEANING EQUIPMENT

The list below includes enough equipment for small-scale abatement jobs. Most facilities will not need as much equipment and, therefore, much of this equipment is optional. This section will not be applicable to facilities that do not have an in-house program for small-scale abatement.

One Time Purchase	Character	Costs
HEPA vacuum	w/1.5" attachments	1600.00
Full face respirator		141.00
Half face respirator		18.00
Personal monitor kit	8 hrs. at max. capacity	285.00
Mister - hand held	quart	1.50
with tank	3 gallon	35.00
Caution signs	12 or more (10 x 14")	3.85
Extension cord	100 feet	15.00
Ground fault circuit interrupter		15.00
Nylon brushes	5	32.52

Disposable Materials/Cleaning Supplies

Filters: HEPA Vacuum	12-gallon capacity	65.00
paper vacuum	microfilter	7.50
HEPA respirator	case of 10	22.50
Vacuum bags	6 mil polyethylene	34.65
Wet wipe cloths	20 x 40" case of 300	10.00
Muslin	10 square yards	16.20
Cheese cloth	10 square yards	7.00
Latex gloves	box of 100	62.00
5-micron water pump filter		3.50

Abatement Supplies

Surfactant	5 gallons	45.00
Encapsulant lag kote	5 gallons	40.72
lag kloth	5 gallons	75.50
Duct tape	2" case of 24	87.00
Protective disposable clothing with hooded, zipping type, booties	case of 25	43.00
6 mil polyethylene plastic bags	22 x 50" case	45.00
polyethylene	20 x 100' rolls	27.00
Glove bags	44 x 60" case of 25	90.00
Razor knives	10	35.00
Wire saws	10	15.00
Scrapers	10	77.70
Wire cutters	10	75.00
Chisel rock hammer	1	25.00

14. TERMS AND ABBREVIATIONS

ACBM - Asbestos Containing Building Materials.

Accessible - When referring to ACM, accessible means the material is subject to disturbance by building occupants, custodial, or maintenance personnel in the course of their normal activities.

Accredited or Accreditation - Refers to a person, firm, or laboratory having met the requirements found in Section 206 of Title II of the AHERA Act.

ACM - Asbestos Containing Materials.

Acoustical Material - Material which often contains Asbestos, Vermiculite, and Perlites that has been applied to ceilings or walls to dampen sound.
AHERA - The Asbestos Hazard Emergency Response Act of 1986 (40 CFR Part 763). Final rule as published in the Federal Register, Vol. 52, No. 210.

Air Plenums - A space above a ceiling used to circulate or condition air throughout the adjacent areas.

Air Samples - Samples of airborne fibers taken by drawing air through an appropriate filter media which traps the fibers. This sample is then analyzed by polarized light or electron microscopy.

Amosite - Brown asbestos, with brittle fibers often used for extreme thermal conditions.

APM - Asbestos Program Manager.

Approved Shower - A shower used for decontamination, with wastewater filtered down to the 5 micron range, and capable of supplying hot water at a temperature of 100 degrees F. or greater.

APR - Air-purifying respirator.

Asbestos - A naturally occurring mineral which includes chrysotile, actinolite, anthophyllite, tremolite, or crocidolite in fibrous structure, or any combination of these that have been chemically treated or altered, as determined by polarized light microscopy (PLM).

Asbestos Containing Material (ACM) - When referring to a building means any material or product that contains greater than 1% of asbestos.

Asbestos Containing Building Materials (ACBM) - is surfacing ACM, thermal ACM, or miscellaneous ACM that is found in or on the structural members of a building.

Asbestos Debris - Pieces of ACBM that can be identified by color, texture, or fiber content as originating from adjacent ACM.

Asbestos Fiber - Is any fiber of chrysotile, actinolite, amosite, tremolite, anthophyllite, crocidolite at least 5 micrometers in length and with a length-to-width ratio (aspect) of greater than 3 to 1.

Asbestos Management Plan - A document to assist in administering the asbestos program in a facility, that includes recommendations for response to ACM in the building, and which includes the O & M Program.

Asbestosis - A chronic disease during which the lungs become scarred because of a biological reaction to the inhalation of asbestos fibers.

ASHAA - Asbestos School Hazard Abatement Act of 1984. A funding vehicle for schools.

Authorized Person - Is any person authorized by an employer and required by work duties to be present in regulated area or activities.

Bulk Samples - Samples of suspect asbestos containing material. These samples are then analyzed by Polarized Light Microscopy (PLM).

CFR - Code of Federal Regulations.

Chrysotile - White asbestos, fine, silky, flexible fibers with high tensile strength.

Clean Room - Is an uncontaminated room having facilities for the storage of employees' street clothing and uncontaminated supplies and equipment.

Competent Person - Is a person capable of identifying existing asbestos hazards in the workplace and who has the authority to take prompt corrective measures.

Condition Factors - A description of the ACM's condition.

Crawl Space - An area of a building only a few feet high, often below the building level, but above the ground.

Crocidolite - Blue asbestos, has brittle fibers.

Decontamination Area - Is an enclosed area adjacent and connected to the work area consisting of an equipment room, shower area, and clean room which are used for the decontamination of personnel, equipment, and materials.

Demolition – As regulated by the NESHAP, means the wrecking or taking out of any load-supporting structural member. It generally should be interpreted as wrecking the structure or leveling the site.

Doffing - The action of taking off personal protective equipment.

Donning - The action of putting on personal protective equipment.

Employee Exposure - Exposure to airborne asbestos, actinolite, tremolite, anthophyllite, or any combination of these minerals that would occur if the employees were not wearing respiratory protection.

Encapsulation - The treatment of ACM/ACBM in place in a building with a liquid material that bridges or penetrates the asbestos fibers in an adhesive matrix to prevent the release of those fibers.

Bridging - Encapsulation technique that creates a membrane on the ACM surface.

Penetration - Encapsulation technique where the encapsulating mixture penetrates the ACM material and binds its components together.

Enclosure - Is an airtight, impermeable, permanent mechanical barrier around or over ACM/ACBM to prevent the release of asbestos into the air.
Equipment Room - A contaminated room located within the decontamination area, that is supplied with impermeable bags for the disposal of contaminated personal protective clothing and equipment. Usually called the "dirty" room.
F/CC - Fibers per cubic centimeter. A measurement to express the level of fibers in the air.

Facility - Is any institutional, commercial, public, industrial, or residential structure, installation or building; any ship; any active or inactive waste disposal sites. Defines a facility where NESHAP applies. A single residential building no larger than 4 dwelling units is not a facility.

Facility Component - Any pipe, duct, boiler, tank, reactor, turbine or furnace at or in a facility; or any structural members of a facility.

Fiber Release Episode - Is any uncontrolled or unintentional disturbance of ACM/ACBM that results in a visible emission.

Fibrils - A small bundle of individual fibers.

Fireproofing - Material sprayed or troweled onto facility components or structural members to prevent or retard their loss of strength during a fire. Often contains asbestos.

Fit-testing - The action, either by qualitative or quantitative measurement, of ensuring a respirator has a proper seal to the workers' face and is functioning properly.

Friable - Easily crumbled by hand pressure or material that has been made friable.

Friable Asbestos Containing Material - Is any material, containing greater the 1% asbestos, that can be crumpled, pulverized, or reduced to powder, when dry, by hand pressure.

Glove bag - A poly bag used to remove pipe insulation.

Hazard - Is any circumstance, mechanism, or event which has the potential to create injury or loss.

HEPA – High Efficiency Particulate Air. This prefix to the word "filter" defines a level of filter efficiency capable of trapping and retaining at least 99.97% of all mono-dispersed fibers greater than 0.3 micrometers in diameter.

Homogeneous Area - An area that is determined to be uniform in color, texture, depth, content, or age.

Inadvertent Contamination - The disturbance of ACM/ACBM not caused intentionally by individuals or parties involved in the project.

Inspection - The process of locating ACM, determining its condition, and reporting the results. This inspection is the basis of the management plan.

Latency - The period of a disease without manifestation of symptoms. The length of time between exposure and diagnosis.

Magnesia - A type of thermal insulation, usually white and often pre-formed into squares or rectangles, often contains asbestos.

Mechanical Area - An area of a facility not normally accessed by the public; often contains HVAC equipment, boilers, heat exchangers, tanks, pipes, ducts, and other mechanical equipment.

Medical Surveillance Program - A program to ensure that personnel are physically and psychologically able to wear respiratory protection equipment and are able to perform asbestos related activities.

Mesothelioma - A cancer of the lining of the lungs (pleural) or abdominal (peritoneal) cavity.

Miscellaneous ACM - Miscellaneous material that contains greater than 1% asbestos.

Miscellaneous Material - Building materials that are not thermal system or surfacing material.

MSDS - Material Safety Data Sheets. A technical document or report that provides precautions, protective measures, chemical makeup (active ingredients), and steps to take after a release. A primary source of information concerning chemical hazards.

Mudded Joint Fittings - Plaster compound packed onto pipe joints and around valves, tees, and pumps for thermal insulation; often contains asbestos; also called “hard-cast fittings”.

Negative Air - A reduced pressure, or pressure differential process where the air pressure in the work area is less than that outside the work area. The differential is measured in inches of water column (vacuum).

NESHAP - National Emission Standards for Hazardous Air Pollutants.

NIOSH - National Institute of Occupational Safety and Health. The agency that sets the standards for respirators and other protective equipment.

Non-friable - That material in a building which when dry may not be crumbled, pulverized, or reduced to powder by hand pressure.

O & M - Operations and Maintenance.

Operations and Maintenance Program (O & M) - A program aimed at maintaining friable ACM/ACBM through training, awareness, and standardized work practices. An outreach of a comprehensive O & M program is the cleanup and repair of previously damaged ACM, as well as the prevention of further damage.

OSHA - The Occupational Safety and Health Administration of the United States Department of Labor.

Outside Air - The air outside the regulated area; often called "ambient".

Packing - Material used as gasketing in valves; often contains asbestos.

PAPR - Powered Air Purifying Respirator.

PCM - Phase Contrast Microscopy. A method used to analyze air samples for the presence of airborne fibers. **PEL** - Permissible Exposure Limit. A level of airborne asbestos above which no unprotected employee shall be exposed. Currently the PEL (Federal) is 0.1 f/cc of air as an 8-hour Time Weighted Average, and an Excursion Limit of 1.0 f/cc measured for 30 minutes. See 29 CFR 1926.1101.

Planned Renovation - Facility work such as remodel, or asbestos removal, which has been planned.

PLM - Polarized Light Microscopy. A method used to analyze bulk samples for the presence of asbestos.

Potential Damage - Circumstances in which:

1. Friable ACBM is in an area regularly used by building occupants, including maintenance personnel, in the course of their normal duties, and

2.There are indications that there is a reasonable likelihood that the material or its covering will become damaged, deteriorated, or delaminated due to factors such as changes in building use, changes in operations and maintenance practices, changes in occupancy, or recurrent damage.

Preventive Measures – As used in the AHERA regulation, a preventive measure is a response to non-friable ACM and/or small scale, short duration work on ACM. It is also used as a recommended remedy for friable or TSI in good condition but about to become significantly damaged.

Regulated Areas – An area in which Class I, II or III asbestos work is done. It must be posted with regulatory posting and administered by a competent person.

Re-Inspection - A re-evaluation of the ACM's condition once every three years by an accredited inspector.

Removal - A response action where the asbestos is stripped or permanently removed

Renovation - Is the modification of any existing structure or portion thereof where exposure to airborne asbestos may result.

Repair - Is the restructuring, overhauling, rebuilding, or reconditioning of structures or surfaces where asbestos is present. Repair is a response action under AHERA, requiring certified persons to design and conduct the work.

Respirator - A device worn over the mouth and nose to prevent the inhalation of noxious substances.

Respiratory Protection Plan - A program to provide the information, training, and equipment necessary for proper respiratory protection while working with ACM.

Response Action - Methods of controlling asbestos that include Repair, Removal, Encapsulation, O & M, or Enclosure. A response action is a response to friable material or TSI, bigger than maintenance, and inside the building.

Routine Maintenance Area - An area, such as a boiler room or mechanical room, not normally frequented by the public in which maintenance employees or contract workers regularly conduct maintenance activities.

SEM - Scanning Electron Microscopy. A method to analyze air or bulk samples for the presence of asbestos.

Serpentine - A major classification of asbestos minerals. Chrysotile is serpentine asbestos.

Surfacing Material - That material which is sprayed-on, troweled-on, or otherwise applied as acoustical plaster, fireproofing, or as decorative finishes.

TEM - Transmission Electron Microscopy. Currently the most definite analysis method for the determination of asbestos presence in air, water, or bulk samples.

Thermal System Insulation - Material applied to pipes, fittings, boilers, interior mechanical structures, and ducts to prevent heat loss or gain, condensation or for other purposes. TSI is mechanical system insulation.

TSCA - Toxic Substance Control Act.

TWA - Time Weighted Average. An average concentration of material over an 8 hour time period.

TYVEK - A brand name for non-breathable disposable clothing worn while working with asbestos.

USEPA - United States Environmental Protection Agency. The agency charged with implementing AHERA and NESHAP.

Visible Emissions - Any emissions, which are visually detectable without special instruments coming from asbestos containing material. Visible emissions include trash on the ground and water leaking out of containers.

Wet Cleaning - A cleaning technique where the material is kept wet, and/or towels or mops are used to reduce the potential of the material becoming airborne.

SECTION 9

♦

EXAMPLE OF INITIAL & ANNUAL NOTIFICATION

DOMINION

EXAMPLE OF INITIAL AND ANNUAL NOTIFICATION LETTER

Date: August 25, 2025

To Whom It May Concern,

In accordance with the Asbestos Hazard Emergency Response Act (AHERA), accredited building inspectors have completed an asbestos inspection of the Kyrene Centennial Middle School campus, located at 13808 S 36th Street in Phoenix, Arizona 85044. The inspection, performed January 23 and January 24, 2017, was conducted in accordance with the Environmental Protection Agency's (EPA) Rule "Asbestos-Containing Materials in Schools", 40 CFR Part 763.

Samples of suspect asbestos-containing materials were collected during the inspection and were submitted to a laboratory for analysis.

A copy of the inspection report for the buildings on the Kyrene Centennial Middle School campus, as well as the periodic surveillance records and the site's Management Plan are kept at the District LEA's office. An additional copy of the previously referenced documents are available during normal business hours from 8:00 a.m. to 5:00 p.m. in the Administrative Office of Kyrene Centennial Middle School.

Sincerely,

Kyrene Elementary School District

DOMINION ENVIRONMENTAL CONSULTANTS, INC.
20045 North 19th Avenue - Building 7• Phoenix, Arizona 85027
Tel: (623) 516-1415 Fax: (623) 516-0017
www.dominion-env.com

SECTION 10

♦

COST ESTIMATION

KYRENE ELEMENTARY SCHOOL DISTRICT
Kyrene Centennial Middle School

COST ESTIMATION				
Asbestos-Containing Building Materials	**Location**	**Estimated Quantity**	**Cost (per Sq. Ft.)**	**Estimated Removal Cost**
Black Carpet Square	Throughout Building	1,000	$4.00	$ 4,000.00
Mastic for Black Carpet Square				
Interior Caulking	Throughout Building	200	$3.00	$ 600.00
Exterior Caulking	Throughout Building	200	$3.00	$ 600.00
Tacboard	Offices	15,000	$3.00	$ 45,000.00
Mastic for Tacboard				
Window Glazing	Throughout Building	100	$2.00	$ 200.00
Brick	Building Exterior	100,000	$4.00	$ 400,000.00
Mortar for Brick				
Glass Block Mortar	Building Entrance	500	$3.00	$ 1,500.00
Block	Building Exterior	50,000	$4.00	$ 200,000.00
Mortar for Block				
Black Sink Coating	Teachers Lounge/Break Room	50	$2.00	$ 100.00
Gray Wallpaper	Telephone Room	750	$3.00	$ 2,250.00
Fixture Caulking	Restrooms	100	$2.00	$ 200.00
FRP	Custodian and Drinking Fountains Throughout	250	$3.00	$ 750.00
Mastic for FRP				
Brown Cove Base	Custodian	100	$3.00	$ 300.00
Mastic for Brown Cove Base				
Knockdown Drywall System	Custodian	1,500	$5.00	$ 7,500.00
Tan Striped Wallpaper	Nurses Closet	500	$4.00	$ 2,000.00
Large Pipe Wrap	Above Ceiling	3,000	$3.00	$ 9,000.00
Mastic for Large Pipe Wrap				
Small Pipe Wrap	Above Ceiling	1,500	$3.00	$ 4,500.00
Mastic for Small Pipe Wrap				
Black Pipe Insulation Foam	Above Ceiling	500	$3.00	$ 1,500.00
Silver Box Duct Wrap	Above Ceiling	5,000	$3.00	$ 15,000.00
Silver Duct Wrap	Above Ceiling	5,000	$3.00	$ 15,000.00
Silver Flex Duct Wrap	Above Ceiling	3,000	$3.00	$ 9,000.00
White Duct Seam Tape	Above Ceiling	1,000	$3.00	$ 3,000.00
Mastic for Duct Seam Tape				
Unfinished Drywall System	Above Ceiling	20,000	$4.00	$ 80,000.00
Silver Duct Tape	Above Ceiling	250	$3.00	$ 750.00
Black Entry Carpet	Entrances	375	$4.00	$ 1,500.00
Mastic for Entry Carpet				
Interior Caulking	Throughout Building	200	$3.00	$ 600.00

KYRENE ELEMENTARY SCHOOL DISTRICT
Kyrene Centennial Middle School

COST ESTIMATION				
Asbestos-Containing Building Materials	**Location**	**Estimated Quantity**	**Cost (per Sq. Ft.)**	**Estimated Removal Cost**
Exterior Caulking	Throughout Building	200	$3.00	$ 600.00
Black Sink Coating	Classrooms	60	$2.00	$ 120.00
FRP	Custodial and Drinking Fountains	350	$3.00	$ 1,050.00
Mastic for FRP				
Tacboard	Classrooms	15,000	$3.00	$ 45,000.00
Mastic for Tacboard				
White 2"x2" Ceramic Floor Tile	Restrooms	3,000	$4.00	$ 12,000.00
Grout for White 2"x2" Ceramic Floor Tile				
Thinset for White 2"x2" Ceramic Floor Tile				
Peach 2"x2" Ceramic Floor Tile	Restrooms	1,000	$4.00	$ 4,000.00
Grout for Peach 2"x2" Ceramic Floor Tile				
Thinset for Peach 2"x2" Ceramic Floor Tile				
Blue 2"x2" Ceramic Floor Tile	Restrooms	1,000	$4.00	$ 4,000.00
Grout for Blue 2"x2" Ceramic Floor Tile				
Thinset for Blue 2"x2" Ceramic Floor Tile				
Off-White 4"x4" Ceramic Wall Tile	Restrooms	5,000	$4.00	$ 20,000.00
Grout for Off-White 4"x4" Ceramic Wall Tile				
Mastic for Off-White 4"x4" Ceramic Wall Tile				
Peach 4"x4" Ceramic Wall Tile	Restrooms	1,000	$4.00	$ 4,000.00
Grout for Peach 4"x4" Ceramic Wall Tile				
Mastic for Peach 4"x4" Ceramic Wall Tile				
Fixture Caulking	Restrooms	100	$2.00	$ 200.00
Brown Cove Base	Custodial	45	$3.00	$ 135.00
Mastic for Cove Base				
White w. Black 12"x 12" VCT	B7 Closets, Work Room RR's, and Storage Rooms	3,000	$3.00	$ 9,000.00
Mastic for White w. Black 12"x 12" VCT				
Knockdown Drywall System	Electrical	2,000	$4.00	$ 8,000.00
Brick	Building Exterior	100,000	$4.00	$ 400,000.00
Mortar for Brick				
Expansion Joint	Building Exterior	200	$3.00	$ 600.00
Silver Box Duct Wrap	Above Ceiling	5,000	$3.00	$ 15,000.00
Silver Duct Wrap	Above Ceiling	4,000	$3.00	$ 12,000.00
Silver Flex Duct Wrap	Above Ceiling	3,000	$3.00	$ 9,000.00
White Duct Tape	Above Ceiling	1,000	$3.00	$ 3,000.00
Mastic for Duct Tape				

KYRENE ELEMENTARY SCHOOL DISTRICT
Kyrene Centennial Middle School

COST ESTIMATION				
Asbestos-Containing Building Materials	**Location**	**Estimated Quantity**	**Cost (per Sq. Ft.)**	**Estimated Removal Cost**
Large Pipe Wrap	Above Ceiling	3,000	$3.00	$ 9,000.00
Mastic for Pipe Wrap				
Small Pipe Wrap	Above Ceiling	2,000	$3.00	$ 6,000.00
Mastic for Pipe Wrap				
Unfinished Drywall System	Above Ceiling	20,000	$4.00	$ 80,000.00
Black Entry Carpet	Entrance to Building	375	$4.00	$ 1,500.00
Mastic for Entry Carpet				
Interior Caulking	Throughout Building	200	$3.00	$ 600.00
Black Sink Coating	Sinks Throughout Building	60	$3.00	$ 180.00
Exterior Caulking	Throughout Building	200	$3.00	$ 600.00
Tacboard	Throughout Building	15000	$3.00	$ 45,000.00
Mastic for Tacboard				
Knockdown Drywall System	Electrical	2,000	$4.00	$ 8,000.00
Brown Cove Base	Electrical and Custodial	45	$3.00	$ 135.00
Mastic for Cove Base				
White w. Black 12" x 12" VCT	Storage and Work Room Restroom	3,000	$4.00	$ 12,000.00
Mastic for White w. Black 12" x 12" VCT				
Divider Wall	Rooms C6 and C7	2,000	$5.00	$ 10,000.00
White 2" x 2" Ceramic Floor Tile	Restrooms	3,000	$4.00	$ 12,000.00
Grout for White 2" x 2" Ceramic Floor Tile				
Thinset White 2" x 2" Ceramic Floor Tile				
Peach 2" x 2" Ceramic Floor Tile	Restrooms	1,000	$4.00	$ 4,000.00
Grout for Peach 2" x 2" Ceramic Floor Tile				
Thinset Peach2" x 2" Ceramic Floor Tile				
Blue 2" x 2" Ceramic Floor Tile	Restrooms	1,000	$4.00	$ 4,000.00
Grout for Blue 2" x 2" Ceramic Floor Tile				
Thinset Blue 2" x 2" Ceramic Floor Tile				
Off-white 4" x 4" Ceramic Wall Tile	Restrooms	5,000	$4.00	$ 20,000.00
Grout for Off-white 4" x 4" Ceramic Wall Tile				
Mastic Blue Off-white 4" x 4" Ceramic Wall Tile				
Peach 4" x 4" Ceramic Wall Tile	Restrooms	1,000	$4.00	$ 4,000.00
Grout for Peach 4" x 4" Ceramic Wall Tile				
Mastic Blue Peach 4" x 4" Ceramic Wall Tile				
Fixture Caulking	Restrooms	100	$3.00	$ 300.00

KYRENE ELEMENTARY SCHOOL DISTRICT
Kyrene Centennial Middle School

COST ESTIMATION				
Asbestos-Containing Building Materials	**Location**	**Estimated Quantity**	**Cost (per Sq. Ft.)**	**Estimated Removal Cost**
FRP	Custodial	350	$3.00	$ 1,050.00
Mastic for FRP				
Black Countertops	Rooms C5 and C8	5,000	$5.00	$ 25,000.00
Brick	Building Exterior	100,000	$4.00	$ 400,000.00
Mortar for Brick				
Expansion Joint	Building Exterior	200	$3.00	$ 600.00
Silver Box Duct Wrap	Above Ceiling	5,000	$3.00	$ 15,000.00
Silver Duct Wrap	Above Ceiling	4,000	$3.00	$ 12,000.00
Silver Flex Duct Wrap	Above Ceiling	3,000	$3.00	$ 9,000.00
White Duct Tape	Above Ceiling	1,000	$3.00	$ 3,000.00
Mastic for Duct Tape				
Large Pipe Wrap	Above Ceiling	3,000	$3.00	$ 9,000.00
Mastic for Large Pipe Wrap				
Small Pipe Wrap	Above Ceiling	2,000	$3.00	$ 6,000.00
Mastic for Small Pipe Wrap				
Unfinished Drywall System	Above Ceiling	20,000	$4.00	$ 80,000.00
Black Entry Carpet	Entrance to Building	375	$4.00	$ 1,500.00
Mastic for Entry Carpet				
Interior Caulking	Throughout Building	200	$3.00	$ 600.00
Exterior Caulking	Throughout Building	200	$3.00	$ 600.00
Black Sink Coating	Classrooms	60	$2.00	$ 120.00
Tacboard	Throughout Building	15,000	$3.00	$ 45,000.00
Mastic for Tacboard				
Knockdown Drywall	Electrical Room	2,000	$4.00	$ 8,000.00
White w. Black 12" x 12" VCT	Storage Rooms	3,000	$4.00	$ 12,000.00
Mastic for White w. Black 12" x 12" VCT				
Black Countertops	Rooms D5 and D8	5,000	$5.00	$ 25,000.00
FRP	Custodial	350	$3.00	$ 1,050.00
Mastic for FRP				
Brown Cove Base	Storage Rooms	45	$3.00	$ 135.00
Mastic for Cove Base				
Divider Wall	Rooms D6 and D7	2,000	$5.00	$ 10,000.00
White 2" x 2" Ceramic Floor Tile	Restrooms	3,000	$4.00	$ 12,000.00
Grout for White 2" x 2" Ceramic Floor Tile				
Thinset for White 2" x 2" Ceramic Floor Tile				

COST ESTIMATION				
Asbestos-Containing Building Materials	**Location**	**Estimated Quantity**	**Cost (per Sq. Ft.)**	**Estimated Removal Cost**
Peach 2" x 2" Ceramic Floor Tile	Restrooms	1,000	$4.00	$ 4,000.00
Grout for Peach 2" x 2" Ceramic Floor Tile				
Thinset for Peach 2" x 2" Ceramic Floor Tile				
Blue 2" x 2" Ceramic Floor Tile	Restrooms	1,000	$4.00	$ 4,000.00
Grout for Blue 2" x 2" Ceramic Floor Tile				
Thinset for Blue 2" x 2" Ceramic Floor Tile				
Off-White 4" x 4" Ceramic Wall Tile	Restrooms	5,000	$4.00	$ 20,000.00
Grout for Off-White 4" x 4" CeramicWall Tile				
Mastic for Off-White 4" x 4" Ceramic Wall Tile				
Peach 4" x 4" Ceramic Wall Tile	Restrooms	1,000	$4.00	$ 4,000.00
Grout for Peach 4" x 4" Ceramic Wall Tile				
Mastic for Peach 4" x 4" Ceramic Wall Tile				
Fixture Caulking	Restrooms	100	$2.00	$ 200.00
Brick	Building Exterior	100,000	$4.00	$ 400,000.00
Mortar for Brick				
Expansion Joint	Building Exterior	200	$3.00	$ 600.00
Silver Box Duct Wrap	Above Ceiling	5,000	$3.00	$ 15,000.00
Silver Duct Wrap	Above Ceiling	4,000	$3.00	$ 12,000.00
Silver Flex Duct Wrap	Above Ceiling	3,000	$3.00	$ 9,000.00
White Duct Tape	Above Ceiling	1,000	$3.00	$ 3,000.00
Mastic for Duct Tape				
Large Pipe Wrap	Above Ceiling	3,000	$3.00	$ 9,000.00
Mastic for Large Pipe Wrap				
Small Pipe Wrap	Above Ceiling	2,000	$3.00	$ 6,000.00
Mastic for Small Pipe Wrap				
Unfinished Drywall System	Above Ceiling	20,000	$4.00	$ 80,000.00
Black Entry Carpet	Building Entrance	500	$4.00	$ 2,000.00
Mastic				
Blue Cove Base	Throughout Building	750	$3.00	$ 2,250.00
Mastic for Cove Base				
Interior Caulking	Throughout Building	200	$3.00	$ 600.00
Exterior Caulking	Throughout Building	200	$3.00	$ 600.00
Black Window Glazing	Windows Throughout	300		$ 300.00
Black Sink Coating	Classrooms Throughout	50	$2.00	$ 100.00
Divider Wall	Stage	1500	$5.00	$ 7,500.00

KYRENE ELEMENTARY SCHOOL DISTRICT
Kyrene Centennial Middle School

COST ESTIMATION				
Asbestos-Containing Building Materials	**Location**	**Estimated Quantity**	**Cost (per Sq. Ft.)**	**Estimated Removal Cost**
Blue 6" Cove Base	Ramp	150	$3.00	$ 450.00
Mastic for Blue 6" Cove Base				
Black 6" Cove Base	Multipurpose Room	350	$3.00	$ 1,050.00
Mastic for Black 6" Cove Base				
Gray Speckled 12" x 12" VCT	Gym Janitors Closet	150	$4.00	$ 600.00
Mastic for Gray VCT				
Brick	Throughout Building	150,000	$4.00	$ 600,000.00
Mortar for Brick				
Expansion Joint	Throughout Building	250	$3.00	$ 750.00
Black L Shaped Cove Base	Stage and Gym	500	$3.00	$ 1,500.00
Mastic for L Shaped Cove Base				
Old FRP	Ramp Hallway and Gym Janitors Closet	750	$3.00	$ 2,250.00
Mastic for Old FRP				
Tacboard	Throughout Building	15,000	$3.00	$ 45,000.00
Mastic for Tacboard				
Brown 6" Cove Base	Stage Entry	45	$3.00	$ 135.00
Mastic for 6" Cove Base				
Brown 4" Cove Base	Locker Room Storage	75	$3.00	$ 225.00
Mastic for Brown 4" Cove Base				
White w/ Gray Specks 12" X 12" VCT	Northeast Stage Entry	100	$4.00	$ 400.00
Mastic				
New FRP	Kitchen and Custodial	1,500	$4.00	$ 6,000.00
Mastic for New FRP				
Brown 6" x 6" Ceramic Floor Tile	Kitchen and Snack Bar	10,000	$4.00	$ 40,000.00
Grout for Brown 6" x 6" Ceramic Floor Tile				
Thinset for Brown 6" x 6" Ceramic Floor Tile				
Brown 4" x 6" Ceramic Cove Base	Kitchen and Snack Bar	1,500	$4.00	$ 6,000.00
Mastic for Brown 4" x 6" Ceramic Cove Base				
Drywall 2' x 4' Ceiling Tile	Kitchen and Snack Bar	3,000	$4.00	$ 12,000.00
Polished Concrete	Throughout Building	15,000	$4.00	$ 60,000.00
Floor Expansion Joint for Polished Concrete		150	$3.00	$ 450.00
White w. Black 12" x 12" VCT	Locker Room Storage	250	$4.00	$ 1,000.00
Mastic for 12" x 12" VCT				
Black 4" Cove Base	Lobby and Locker Rooms	300	$3.00	$ 900.00
Mastic for Black 4" Cove Base				

COST ESTIMATION

Asbestos-Containing Building Materials	Location	Estimated Quantity	Cost (per Sq. Ft.)	Estimated Removal Cost
White 4" x 4" Ceramic Wall Tile	Lobby Restrooms and Locker Rooms	6,000	$4.00	$ 24,000.00
Grout for White 4" x 4" Ceramic Wall Tile				
Mastic for White 4" x 4" Ceramic Wall Tile				
Red 4" x 4" Ceramic Wall Tile	Lobby Restrooms and Locker Rooms	2,000	$4.00	$ 8,000.00
Grout for Red 4" x 4" Ceramic Wall Tile				
Mastic for Red 4" x 4" Ceramic Wall Tile				
Black 4" x 4" Ceramic Wall Tile	Lobby Restrooms and Locker Rooms	500	$4.00	$ 2,000.00
Grout for Black 4" x 4" Ceramic Wall Tile				
Mastic for Black 4" x 4" Ceramic Wall Tile				
Gray Floor Coating	Lobby Restrooms	1,500	$4.00	$ 6,000.00
Fixture Caulking	Restrooms	200	$2.00	$ 400.00
Glass Block Mortar	Main Entry's	350	$3.00	$ 1,050.00
Red 3" x 12" Ceramic Wall Tile	Lobby Restroom	3,000	$4.00	$ 12,000.00
Gray FRP	Locker Room Hallways	2,000	$3.00	$ 6,000.00
Mastic for FRP				
Concrete Benches	Locker Rooms	2,500	$5.00	$ 12,500.00
Gray 6" x 6" Ceramic Floor Tile	Locker Rooms Showers	3,000	$4.00	$ 12,000.00
Grout for Gray 6" x 6" Ceramic Floor Tile				
Thinset for Gray 6" x 6" Ceramic Floor Tile				
Green Speckled 2" x 2" Ceramic Floor Tile	Main Exterior Restrooms	500	$4.00	$ 2,000.00
Grout for Ceramic Floor Tile				
Thinset for Ceramic Floor Tile				
Gray 2" x 2" Ceramic Floor Tile	Main Exterior Restrooms	500	$4.00	$ 2,000.00
Grout for Ceramic Floor Tile				
Thinset for Ceramic Floor Tile				
Peach 4" x 4" Ceramic Wall Tile	Main Exterior Restrooms	500	$4.00	$ 2,000.00
Grout for Peach 4" x 4" Ceramic Wall Tile				
Thinset for Peach 4" x 4" Ceramic Wall Tile				
Gray 4" x 4" Ceramic Wall Tile	Main Exterior Restrooms	500	$4.00	$ 2,000.00
Grout for Gray 4" x 4" Ceramic Wall Tile				
Thinset for Gray 4" x 4" Ceramic Wall Tile				
Silver Box Duct Wrap	Above Ceiling	6,000	$3.00	$ 18,000.00
Silver Duct Wrap	Above Ceiling	5,000	$3.00	$ 15,000.00
Silver Flex Duct Wrap	Above Ceiling	4,000	$3.00	$ 12,000.00
White Duct Tape	Above Ceiling	1,500	$3.00	$ 4,500.00
Mastic for Duct Tape	Above Ceiling			

COST ESTIMATION				
Asbestos-Containing Building Materials	**Location**	**Estimated Quantity**	**Cost (per Sq. Ft.)**	**Estimated Removal Cost**
Gray Duct Mastic	Above Ceiling	200	$3.00	$ 600.00
Large Pipe Wrap	Above Ceiling	5,000	$3.00	$ 15,000.00
Mastic for Large Pipe Wrap				
Small Pipe Wrap	Above Ceiling	3,000	$3.00	9,000.00
Mastic for Pipe Wrap				
Unfinished Drywall	Above Ceiling	25,000	$4.00	$ 100,000.00
Blue Cove Base	Classrooms	350	$3.00	$ 1,050.00
Mastic for Blue Cove Base				
Interior Caulking	Throughout Building	150	$3.00	$ 450.00
Exterior Caulking	Throughout Building	150	$3.00	$ 450.00
Black Window Glazing	Throughout Building	100	$3.00	$ 300.00
Tacboard	Classrooms	10,000	$3.00	$ 30,000.00
Mastic for Tacboard				
White w. Black 12" x 12" VCT	Choir Storage, Restroom, and Laundry Room	1,500	$4.00	$ 6,000.00
Mastic for VCT				
Fixture Caulking	Restrooms	100	$2.00	$ 200.00
Gray Sink Coating	Rooms F-1, F-3, and F-5	15	$2.00	$ 30.00
Brown Cove Base	Choir Storage, Restroom, Dark Room, and Laundry Room	100	$3.00	$ 300.00
Mastic for Brown Cove Base				
Polished Concrete	Room F-2	1,500	$4.00	$ 6,000.00
Floor Expansion Joint for Polished Concrete		100	$2.00	$ 200.00
Gray Duct Mastic	Above Ceiling	100	$3.00	$ 300.00
Black Rubber Gym Floor	Room F-5	2,000	$4.00	$ 8,000.00
Black Cove Base	Room F-5 and F-6 Backroom	100	$3.00	$ 300.00
Mastic for Black Cove Base				
Gray Wood Vinyl Flooring	Room F-5 and F-6 Backroom	1,000	$4.00	$ 4,000.00
Mastic for Gray Wood Vinyl Flooring				
Divider Wall	Room F-5 and F-6	1,500	$5.00	$ 7,500.00
Brick	Throughout Building	75,000	$4.00	$ 300,000.00
Mortar for Brick				
Expansion Joint	Throughout Building	150	$3.00	$ 450.00
Large Pipe Wrap	Above Ceiling	3,000	$3.00	$ 9,000.00
Mastic for Large Pipe Wrap				
Small Pipe Wrap	Above Ceiling	2,000	$3.00	$ 6,000.00
Mastic for Pipe Wrap				
Black Pipe Foam Insulation	Above Ceiling	150	$3.00	$ 450.00

KYRENE ELEMENTARY SCHOOL DISTRICT
Kyrene Centennial Middle School

COST ESTIMATION				
Asbestos-Containing Building Materials	**Location**	**Estimated Quantity**	**Cost (per Sq. Ft.)**	**Estimated Removal Cost**
Silver Box Duct Wrap	Above Ceiling	3,000	$3.00	$ 9,000.00
Silver Duct Wrap	Above Ceiling	2,000	$3.00	$ 6,000.00
Silver Flex Duct Wrap	Above Ceiling	2,500	$3.00	$ 7,500.00
White Duct Tape	Above Ceiling	200	$3.00	$ 600.00
Mastic for Duct Tape	Above Ceiling			
Unfinished Drywall	Above Ceiling	1,500	$4.00	$ 6,000.00
Silver Duct Tape	Above Ceiling	150	$3.00	$ 450.00
Skylight Insulation Panel	Above Ceiling	2,500	$4.00	$ 10,000.00
Black Entry Carpet	Building Entrances	250	$4.00	$ 1,000.00
Mastic for Entry Carpet				
Blue Cove Base	Throughout Building	350	$3.00	$ 1,050.00
Mastic for Cove Base				
Interior Caulking	Throughout Building	100	$3.00	$ 300.00
Exterior Caulking	Throughout Building	100	$3.00	$ 300.00
Black Sink Coating	Office Sink	10	$2.00	$ 20.00
Tacboard	Classrooms and Media Center	10,000	$3.00	$ 30,000.00
Mastic for Tacboard				
White w. Black 12" x 12" VCT	Throughout Building	750	$4.00	$ 3,000.00
Mastic for VCT				
Green Wallpaper	Media Center Restroom	400	$3.00	$ 1,200.00
Glass Block Mortar	Building Entrances	250	$3.00	$ 750.00
White w. Gray 12" x 12" VCT	IDF Room	350	$4.00	$ 1,400.00
Mastic for VCT				
Gray Wallpaper	Storage	250	$3.00	$ 750.00
Knockdown Drywall	Custodian Closet	1,000	$4.00	$ 4,000.00
Brown Cove Base	Computer Lab Storage	45	$3.00	$ 135.00
Mastic for Brown Cove Base				
Large Pipe Wrap	Above Ceiling	3,000	$3.00	$ 9,000.00
Mastic for Large Pipe Wrap				
Small Pipe Wrap	Above Ceiling	2,000	$3.00	$ 6,000.00
Mastic for Pipe Wrap				
Black Pipe Foam Insulation	Above Ceiling	100	$3.00	$ 300.00
Silver Box Duct Wrap	Above Ceiling	3,000	$3.00	$ 9,000.00
Silver Duct Wrap	Above Ceiling	2,000	$3.00	$ 6,000.00
Silver Flex Duct Wrap	Above Ceiling	2,000	$3.00	$ 6,000.00

KYRENE ELEMENTARY SCHOOL DISTRICT
Kyrene Centennial Middle School

COST ESTIMATION				
Asbestos-Containing Building Materials	**Location**	**Estimated Quantity**	**Cost (per Sq. Ft.)**	**Estimated Removal Cost**
White Duct Tape	Above Ceiling	250	$3.00	$ 750.00
Mastic for Duct Tape	Above Ceiling			
Unfinished Drywall	Above Ceiling	10,000	$4.00	$ 40,000.00
Silver Duct Tape	Above Ceiling	50	$3.00	$ 150.00
Skylight Insulation Panel	Above Ceiling	1,500	$4.00	$ 6,000.00
Black Entry Carpet	Building Entraces	250	$4.00	$ 1,000.00
Mastic for Black Entry Carpet				
Interior Caulking	Throughout Building	150	$3.00	$ 450.00
Exterior Caulking	Throughout Building	150	$3.00	$ 450.00
Black Sink Coating	Classrooms	100	$2.00	$ 200.00
Tacboard	Throughout Building	15,000	$3.00	$ 45,000.00
Mastic for Tacboard				
White Sink Coating	Room H-11	5	$3.00	$ 15.00
Fume Hood Panel	Room H-11 and H-6	50	$2.00	$ 100.00
Tan Speckled 12" x 12" VCT	Storage and Janitors Closet	500	$4.00	$ 2,000.00
Mastic for Tan Speckled 12" x 12" VCT				
Gray Cove Base	Storages, H-8 Office, and Workroom Restroom	250	$3.00	$ 750.00
Mastic for Gray Cove Base				
FRP	Janitors Closet and H-9 Restroom	300	$3.00	$ 900.00
Mastic for FRP				
Smooth Drywall	Janitors Closet	2,500	$4.00	$ 10,000.00
White w. Gray Specks 12" x 12" VCT	Room H-9, H-6, H-8, and Storages	3,000	$4.00	$ 12,000.00
Mastic for White w. Gray Specks 12" x 12" VCT				
Divider Wall	Rooms H-7, H-8, and H-9	3,000	$5.00	$ 15,000.00
Block	Throughout Building	75,000	$4.00	$ 300,000.00
Mortar for Block				
Brick	Throughout Building	75,000	$4.00	$ 300,000.00
Mortar for Brick				
Off-White 4" x 4" Ceramic Wall Tile	Restrooms	4,000	$4.00	$ 16,000.00
Mastic for Off-White 4" x 4" Ceramic Wall Tile				
Grout for Off-White 4" x 4" Ceramic Wall Tile				
Peach 4" x 4" Ceramic Wall Tile	Restrooms	500	$4.00	$ 2,000.00
Mastic for Peach 4" x 4" Ceramic Wall Tile				
Grout for Peach 4" x 4" Ceramic Wall Tile				

KYRENE ELEMENTARY SCHOOL DISTRICT
Kyrene Centennial Middle School

COST ESTIMATION				
Asbestos-Containing Building Materials	**Location**	**Estimated Quantity**	**Cost (per Sq. Ft.)**	**Estimated Removal Cost**
Gray 4" x 4" Ceramic Wall Tile	Restrooms	500	$4.00	$ 2,000.00
Mastic for Gray 4" x 4" Ceramic Wall Tile				
Grout for Gray 4" x 4" Ceramic Wall Tile				
Off-White 2" x 2" Ceramic Floor Tile	Restrooms	3,000	$4.00	$ 12,000.00
Grout for Off-White 2" x 2" Ceramic Floor Tile				
Thinset for Off-White 2" x 2" Ceramic Floor Tile				
Green Speckled 2" x 2" Ceramic Floor Tile	Restrooms	500	$4.00	$ 2,000.00
Grout for 2" x 2" Ceramic Floor Tile				
Thinset for 2" x 2" Ceramic Floor Tile				
Gray Speckled 2" x 2" Ceramic Floor Tile	Restrooms	500	$4.00	$ 2,000.00
Grout for 2" x 2" Ceramic Floor Tile				
Thinset for 2" x 2" Ceramic Floor Tile				
Fixture Caulking	Restrooms	100	$2.00	$ 200.00
Glass Block Mortar	Building Entraces	200	$4.00	$ 800.00
Knockdown Drywall	Electrical	2,000	$4.00	$ 8,000.00
Large Pipe Wrap	Above Ceiling	5,000	$3.00	$ 15,000.00
Mastic for Large Pipe Wrap				
Small Pipe Wrap	Above Ceiling	4,000	$3.00	$ 12,000.00
Mastic for Pipe Wrap				
Black Pipe Foam Insulation	Above Ceiling	1,000	$3.00	$ 3,000.00
Silver Box Duct Wrap	Above Ceiling	5,000	$3.00	$ 15,000.00
Silver Duct Wrap	Above Ceiling	4,000	$3.00	$ 12,000.00
Silver Flex Duct Wrap	Above Ceiling	3,000	$3.00	$ 9,000.00
White Duct Tape	Above Ceiling	500	$3.00	$ 1,500.00
Mastic for Duct Tape	Above Ceiling			
Unfinished Drywall	Above Ceiling	20,000	$4.00	$ 80,000.00
Silver Duct Tape	Above Ceiling	100	$3.00	$ 300.00
Skylight Insulation Panel	Above Ceiling	2,000	$4.00	$ 8,000.00
Total Estimated Cost				**$5,307,735.00**

KYRENE ELEMENTARY SCHOOL DISTRICT
Kyrene Centennial Middle School

RESOURCE EVALUATION		
Reinspection Costs / Year	**Estimated Years**	**Totals**
$1,200.00	20	$24,000.00
O & M / Year	**Estimated Years**	**Totals**
$500.00	20	$10,000.00
6 Month Periodic Surveillance / Year	**Estimated Years**	**Totals**
$2,400.00	20	$48,000.00

Training/ Year	Training Cost/Year	Estimated Years	
2 Hour Initial Training Class	10 Staff Members @ $150.00 ea. = $1,500.00	20	$30,000.00
16 Hour Initial Training Class	2 Staff Members @ $250.00 ea. = $500.00	20	$10,000.00
Refresher Class	12 Staff Members @ $150.00 ea = $1,800.00	20	$36,000.00

Total Annual Cost	$7,900.00
Total Cost Over Life of O & M	$158,000.00
Cost of Removal at End of Building Life	$5,307,735.00
Total Cost at End of Building Life	$5,465,735.00

SECTION 11

♦

MANAGEMENT PLANNER
OPTIONAL COMPLIANCE STATEMENT

Optional Management Planner
Compliance Statement

763.93(f)

I certify that I have prepared and/or reviewed this Management Plan and that such plan is in compliance with the Asbestos Hazard Emergency Response Act at 40 CFR 763, Subpart E.

I also certify that I have no financial connection with any party who implements or will implement this Management Plan.

Printed Name: Xin Lou Date: July 26, 2025

Signature: Shane Lou

State of Accreditation or EPA: EPA AHERA Management Planner - Arizona

Accreditation Date: October 3, 2024 – October 3, 2025

Accreditation Number: -ON-4651-548-100324

THE ASBESTOS INSTITUTE

Certifies that

Xin Lou

has attended and received instruction in the EPA approved course

AHERA Management Planner Refresher

on

October 03, 2024

and successfully completed and passed the competency exam.

Certificate:
ON-4651-548-100324

Date of Examination:
3-Oct-2024

Date of Expiration:
03-Oct-2025

William T. Cavness
Director

Approved Instructor

THE ASBESTOS INSTITUTE
20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

The person receiving this certificate has completed the requisite training for asbestos accreditation under TSCA Title II.

SECTION 12

♦

SIGNED STATEMENT BY DESIGNATED PERSON

Local Education Agency (LEA) General Responsibilities Under AHERA

Pursuant to Section 763.84 and Section 763.93 of the EPA Asbestos in Schools Regulations (40 CFR, Part 763), each management plan must contain a true and correct statement signed by the LEA designated person, that certifies that the general LEA responsibilities have been met. This form is provided to assist you in complying with this portion of AHERA.

LEA Name:_____

LEA Address:_____

Designated Person Name:_____

Designated Person Address:_____

ASSURANCES

1. This AHERA management plan was developed and has been submitted pursuant to the Asbestos Hazard Emergency Response Act of 1986, Public Law 99-915; and the United States Environmental Protection Agency Rule: Asbestos Containing Material in Schools, 40 CFR, Part 763; and the undersigned does hereby certify that the LEA has and will ensure the following:

2. The activities of any persons who perform inspections, reinspections and periodic surveillance, develop and update management plans, and develop and implement response actions, including operations and maintenance, are carried out in accordance with Part 763.

3. All custodial and maintenance employees are properly trained as required in Part 763 and all other applicable Federal and/or State regulations (e.g., the Occupational Safety and Health Administration Asbestos Standard for Construction, the EPA Worker Protection Rule or applicable state regulations).

4. All workers and building occupants, or their legal guardians, are informed at least once each school year about inspections, response actions, post-response action activities, including period reinspection and surveillance activities, that are planned or in progress.

5. All short-term workers (e.g., telephone repair workers, utility workers or exterminators) who may come in contact with asbestos in a school are provided information regarding the locations of ACM and suspected ACM assumed to be ACM.

6. All warning labels are posted in accordance with Section 763.95.

7. All management plans are available for inspection and notification of such availability has been provided as specified in the management plan under Section 763.93(g).

8. The undersigned person designated by the LEA pursuant to Section 763.84 (g)(1) has received adequate training as stipulated in Section 763.84(g)(2).

9. The LEA has and will consider whether any conflict of interest may arise from the interrelationship among accredited personnel and whether that should influence the selection of accredited personnel to perform activities under Part 763.

SIGNATURE_____DATE_____
LEA Designated Person, pursuant to
40 CFR 763.93(I) and 763.84.