Prepared for:

Kyrene Elementary School District
8700 South Kyrene Road
Tempe, Arizona 85284

AHERA ASBESTOS INSPECTION REPORT

FOR

KYRENE CENTENNIAL MIDDLE SCHOOL
13808 SOUTH 36TH STREET
PHOENIX, ARIZONA 85044

PURCHASE ORDER NO. 251702

Prepared by:

DOMINION

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue, Building 7
Phoenix, Arizona 85027
(623) 516-1415

Dominion Project Number: AZ1418.56

AHERA Re-Inspection Date: August 4, 2025 – August 12, 2025

TABLE OF CONTENTS

LIMITATIONS ..... SECTION 1

INSPECTION PROCESS ..... SECTION 2

EXECUTIVE SUMMARY ..... SECTION 3

SITE PLANS ..... SECTION 4

HOMOGENEOUS MATERIALS INVENTORY LISTS ..... SECTION 5

PLM BULK SAMPLE SHEETS ..... SECTION 6

PLM BULK SAMPLE LOCATION MAPS ..... SECTION 7

PHYSICAL ASSESSMENT INFORMATION SHEETS ..... SECTION 8

LABORATORY REPORTS ..... SECTION 9

ASSUMED ACBM LOCATION MAPS ..... SECTION 10

INSPECTOR ACCREDITATION ..... SECTION 11

LABORATORY ACCREDITATION ..... SECTION 12

SECTION 1

♦

LIMITATIONS

LIMITATIONS

The conclusions and results contained herein are based solely on the information presented in this report. The sampling, testing, and observations described in the report represent conditions only at the specified times and locations. Additional materials or information which were hidden, undiscovered, inaccessible, or not a part of the findings presented herein, would result in the modification of the conclusions and recommendations made herein. Any response action guidelines are based solely on the findings contained herein. The response action guidelines are presented as a courtesy and are not to be considered a complete or detailed set of specifications. Dominion performed this survey as directed by the client and in compliance with applicable regulations.

Dominion is not responsible for the accuracy of information provided by others, or for conditions or consequences arising from relevant facts that were withheld, concealed, undiscovered, or not fully disclosed. Dominion is not a law firm, and therefore, makes no representations regarding any potential liability of any person or entity for site conditions. Further, Dominion is not qualified to present medical advice. If any present or future health issues are in question, it is recommended that the findings in this report be presented to a qualified medical professional for evaluation.

Kyrene Centennial is currently being used daily, therefore, to avoid conspicuous damage and a possible trip and fall hazard, Dominion was only able to check for secondary flooring layers in the corners of each room. Therefore, if the carpets are to be replaced, additional investigation should be performed under other areas of the flooring to assure that an undetected second layer of flooring does not exist. Any necessary samples should be collected by a certified inspector prior to the disturbance of any discovered unsampled flooring.

Additional materials or information which were hidden, undiscovered, inaccessible, or are not a part of the finding presented herein, would result in the modification of the conclusions and recommendations made herein. Changes over which Dominion has no control, including but not limited to, the passage of time, manifestation of latent conditions, or occurrence of future events, require reevaluation of the findings, observations, and conclusions expressed in the report.

The limited sampling, testing, and observations described in the report represent conditions only at specified times and locations. These limited sampling methods, techniques, and scope of services were not comprehensive or to be considered all inclusive. Dominion is not responsible for the accuracy of information or services provided by others, including but not limited to other consultants, analytical laboratories, or public records. Dominion is not liable for conditions or consequences arising from relevant facts that were withheld, concealed, undiscovered, or not fully disclosed. Dominion performed this survey in a specific area as directed by the Client and in compliance with applicable regulations.

Dominion's scope of service for this report did not include the inspection for, or identification of fungi, lead paint, or any other hazardous or controlled substances not specifically identified herein. This report presents professional opinions and findings of a scientific or technical nature.

SECTION 2

♦

INSPECTION PROCESS

INSPECTION PROCESS

The Environmental Protection Agency (EPA) in 40 CFR 763, the Asbestos Hazard Emergency Response Act (AHERA), requires Local Education Agencies (LEAs) to identify friable and non-friable asbestos-containing building material (ACBM) in public and private elementary and secondary schools by visually inspecting school buildings for such materials and by sampling all identified suspect materials if they are not assumed to be ACBM. Those samples are then to be analyzed using appropriate analysis techniques, by a qualified laboratory, as referred to in the regulations. AHERA requires LEAs to only utilize accredited personnel when conducting inspections, re-inspections, developing management plans, or performing response actions. This regulation also includes record-keeping requirements. LEAs may contractually delegate their duties under this rule, but they remain responsible for the proper performance of those duties. LEAs are encouraged to consult with EPA Regional Asbestos Coordinators, or if applicable a State's lead agency designated by the State Governor, for assistance in complying with this rule.

This report complies with AHERA based protocols outlined in 40 CFR 763.85, specifically:

- The campus was visually inspected to identify the locations of all suspected ACBM.
- All suspect materials were touched to determine friability and condition.
- Bulk samples were collected of all homogeneous areas of friable suspected ACBM and all homogeneous areas of non-friable suspected ACBM.
- The date of the inspection, the name and signature of the person making the inspection, State of accreditation, his or her accreditation number and any changes in the condition of known or assumed ACBM are included in this report, if applicable.
- The exact locations where samples were collected during the inspection are marked, as well as a description of the manner used to determine sampling locations, the name and signature of each accredited inspector who collected the samples, State of accreditation and if applicable, his or her accreditation number.
- Also included within the report are any assessments or reassessments made of friable material, the name and signature of the accredited inspector making the assessments, State of accreditation and if applicable, his or her accreditation number.

The sampling protocol outlined in 40 CFR 763.86 is as follows:

Surfacing material is material in a school building that is sprayed-on, troweled-on, or otherwise applied to surfaces, such as acoustical plaster on ceilings and fireproofing materials on structural members, or other materials on surfaces for acoustical, fireproofing, or other purposes. Surfacing materials are collected in a statistically random manner as follows:

- At least three (3) bulk samples shall be collected from each homogeneous area that is one thousand (1,000) square feet.

- At least five (5) bulk samples shall be collected from each homogeneous area that is greater than one thousand (1,000) square feet but less than or equal to five thousand (5,000) square feet.

- At least seven (7) bulk samples shall be collected from each homogeneous area that is greater than five thousand (5,000) square feet.

Thermal system insulation (TSI) in a school building means materials applied to pipes, fittings, boilers, breeching, tanks, ducts, or other interior structural components to prevent heat loss or gain, or water condensation, or for other purposes. TSI samples are collected in a randomly distributed manner as follows:

- A minimum of three (3) bulk samples are collected from each homogeneous area of TSI that is not assumed to be ACBM.

- Collect at least one (1) bulk sample from each homogeneous area of patched TSI that is not assumed to be ACBM if the patched section is less than six (6) linear or square feet.

- In a manner sufficient to determine whether the material is ACBM or not ACBM, collect bulk samples from each insulated mechanical system that is not assumed to be ACBM where cement or plaster is used on fittings such as tees, elbows, or valves.

- Bulk samples are not required to be collected from any homogeneous area where the accredited inspector has determined that the TSI is fiberglass, foam glass, rubber, or other non-ACBM.

  Miscellaneous material is sampled in a manner sufficient to determine whether the material is ACBM or not ACBM. An accredited inspector shall collect bulk samples from each homogeneous area of friable miscellaneous material that is not "assumed" to be ACBM. Therefore, Dominion will collect a minimum of three (3) samples of each miscellaneous material, as a matter of industry standards.

ASSESSMENT OF MATERIALS

In compliance with 40 CFR 763.88, Dominion inspectors have classified the ACBM and suspected ACBM in the school buildings into one of the following categories:

(1) Damaged or significantly damaged Thermal System Insulation ACBM
(2) Damaged friable surfacing ACBM
(3) Significantly damaged friable surfacing ACBM
(4) Damaged or significantly damaged friable miscellaneous ACBM
(5) ACBM with potential for damage
(6) ACBM with potential for significant damage
(7) Any remaining friable ACBM or friable suspected ACBM

As part of the assessment, the following issues have been taken into consideration:

i. Location and the amount of the material, both in total quantity and as a percentage of the functional space.
ii. The type of damage or significant damage (e.g., flaking, blistering, water damage, or other signs of physical damage).
iii. The severity of damage (e.g., major flaking, severely torn jackets, as opposed to occasional flaking, minor tears to jackets).
iv. Extent or spread of damage over large areas or large percentages of the homogeneous area.
v. Whether the material is accessible.
vi. The material's potential for disturbance.
vii. Known or suspected causes of damage or significant damage (e.g., air erosion, vandalism, vibration, water).
viii. Preventive measures might eliminate the reasonable likelihood of undamaged ACBM from becoming significantly damaged.

SECTION 3

♦

EXECUTIVE SUMMARY

EXECUTIVE SUMMARY

INTRODUCTION

Dominion Environmental Consultants, Inc. (Dominion) was authorized, by Mr. Mason Meade with the Kyrene Elementary School District (KESD), to perform the Initial AHERA Asbestos Inspection of Kyrene Centennial Middle School, located at 13808 S. 36th Street, Phoenix, Arizona, via a written Purchase Order #251702, dated August 4, 2025.

Due to budgetary constraints, Dominion was directed by Mr. Meade to first sample the accessible building materials inside the building until a pre-determined number of samples were collected. Once the allotted number of samples per building had been collected, Dominion was then directed to "assume as asbestos-containing" the remaining suspect building materials. Pursuant to Mr. Meade's directions, the sampling order of importance was determined first on materials with the largest square footage, then least accessible materials, ceramic tiles, and materials least likely to be disturbed.

Dominion was also instructed to utilize Dominions pervious Limited Asbestos Reports, Project Numbers AZ0959.2917 dated September 29, 2021, AZ0959.3105 dated July 11, 2022, and AZ1418.11 dated March 12, 2024. Per the direction of Mr. Meade, Dominion was instructed to utilize the information from these previous reports and to only collect additional bulk samples of any previously unsampled building materials.

Kyrene Centennial Middle School campus consists of eight (8) single story, slab on grade, block structure. No below grade levels were observed for any building on campus.

BACKGROUND INFORMATION

INITIAL LIMITED AHERA ASBESTOS SURVEY – SEPTEMBER 2021

Dominions Limited Asbestos Inspections of the Kyrene Centennial Middle School Kitchen, Building E was conducted on January 15, 2021, by Mr. Garth Backman, an AHERA accredited Asbestos Building Inspector (State of Arizona ON-4644-12304-071621, expiration date June 16, 2022).

2022 LIMITED AHERA ASBESTOS SURVEY – JULY 2022

Dominions Limited Asbestos Inspections of the Kyrene Centennial Middle School Men's Restroom of the Teachers' Lounge in Building D was conducted on July 11, 2022, by Mr. Nick Marcos, an AHERA accredited Asbestos Building Inspector (State of Arizona #ON-4644-8873-032422, expiration date March 24, 2023).

2024 6-MONTH SURVEILLANCE INSPECTION – MARCH 2024

Dominions 6-Month Surveillance Inspection of the Kyrene Centennial Middle School was conducted on March 12, 2024, by Mrs. Tracey Carpenter, an AHERA accredited Asbestos Building Inspector (State of Arizona # ON-4644-14588-090523, expiration date September 5, 2024).

2025 AHERA ASBESTOS RE-INSPECTION – AUGUST 2025

Dominion's AHERA Asbestos Inspection, of the Kyrene Centennial Middle School was conducted on August 4 – 12, 2025, by Mr. Nick Marcos, an AHERA accredited Asbestos Building Inspector. (State of Arizona #ON-188748-8873-031325, expiration date March 13, 2026).

COLLECTION OF BULK SAMPLES

Initial Limited AHERA Asbestos Survey – September 2021

A total of three (3) bulk samples were collected from one (1) homogeneous building material within the kitchen of Building 500.

Identified in the following list is the one (1) suspect homogeneous building materials sampled during the September 29, 2021, limited asbestos inspection.

Building E – Kitchen - 1 Materials – 0 ACBM

- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

2022 Limited AHERA Asbestos Survey – July 2022

A total of fifteen (15) bulk samples were collected from seven (7) homogeneous building materials within the faculty restroom of Building D.

Identified in the following list are the seven (7) suspect homogeneous building materials sampled during July 11, 2022, limited asbestos inspection.

Building E – Kitchen - 7 Materials – 0 ACBM

- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)
- Brown Cove Base
- Yellow Mastic for Brown Cove Base
- Blue Cove Base
- Yellow Mastic for Blue Cove Base
- Counter Caulking
- Fixture Caulking

2024 AHERA Asbestos Inspection – March 2024

A total of forty-one (41) bulk samples were collected from thirty-nine (39) homogeneous building materials within the Restrooms in Building 200 and Kitchen and Stage of Building 600.

Identified in the following list are the thirty-nine (39) suspect homogeneous building materials sampled during the March 13, 2024, limited asbestos inspection.

Building A – 3 Materials – 0 ACBM

- Skip Trowel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)
- White w/Gray Specks 12"x12" VCT
- Semi-Transparent Mastic for 12” x 12” VCT

Building B– 7 Materials – 0 ACBM

- Tan Ceramic Tile
- Cream Mastic for Tile
- Gray Grout for Tile
- Gray Mortar for Tile
- White Ceramic Tile ND
- Gray Grout ND
- Tan Mastic

Building C – 3 Materials – 0 ACBM

- White Ceramic Tile
- Gray Grout for Tile
- Tan Mastic for Tile

Building D – 12 Materials – 0 ACBM

- White Ceramic Tile
- Gray Grout for Tile
- Tan Mastic for Tile
- 2” x 2” Tan Floor Tiles
- Gray Grout for Tile
- Yellow Mastic for Tile
- 2” x 2” Pink Floor Tile
- Gray Grout for Tile
- Beige Thinset for Tile
- 2” x 2” Green Floor Tile
- Gray Grout for Tile
- Beige Thinset for Tile

Building E – 9 Materials – 0 ACBM

- Red 12” x 12” VCT
- Mastic for Red 12” x 12” VCT
- Brown Stair Tread
- Cream Mastic for Brown Stair Tread
- White RR Wall Tiles
- Grout for White RR Wall Tiles
- White 2” x 2” Floor Tiles
- Dark Gray Grout for Tile
- Dark Gray Thinset for Tile

Building H – 4 Materials – 0 ACBM

- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)
- Tac Board
- White 12” x 12” VCT
- Transparent Mastic for White 12” x 12” VCT

2025 AHERA Asbestos Re-Inspection - June 2025

During the 2025 AHERA Asbestos Re-inspection, a total of one hundred and twenty-three (123) bulk samples were collected from fifty-five (55) homogeneous building materials (multiple layers) throughout the Kyrene Centennial Buildings A, B, C, D, E, F, and G. Identified in the following list are the fifty-five (55) suspect homogeneous materials Dominion sampled during the 2025 AHERA inspection.

Building A – 7 Materials – 0 ACBM

- New 2” x 2” Ceiling Tile
- Old 2” x 2” Ceiling Tile
- Gray Multi-Color Carpet Square
- Tan Mastic for Gray Multi-Color Carpet Square
- Blue Cove Base
- Cream Mastic Blue Cove Base
- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

Building B – 7 Materials – 0 ACBM

- New 2” x 2” Ceiling Tile
- Old 2” x 2” Ceiling Tile
- Gray Multi-Color Carpet Square
- Yellow Mastic for Carpet Square

- Blue Cove Base
- Yellow Mastic for Cove Base
- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

Building C – 7 Materials – 0 ACBM

- New 2” x 2” Ceiling Tile
- Old 2” x 2” Ceiling Tile
- Gray Multi-Color Carpet Square
- Tan Mastic for Gray Multi-Color Carpet Square
- Blue Cove Base
- Cream Mastic for Blue Cove Base
- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

Building D – 7 Materials – 0 ACBM

- New 2’ x 2’ Ceiling Tile
- Old 2’ x 2’ Ceiling Tile
- Gray Multicolored Carpet Square
- Multicolored Mastic for Carpet Square
- Blue Cove Base
- Cream Mastic for Cove Base
- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

Building E – 8 Materials – 0 ACBM

- New 2” x 2” Ceiling Tile
- Old 2” x 2” Ceiling Tile
- Peach Soundboard Wrap
- Yellow Adhesive for Wrap
- Gray Multicolored Carpet Square
- Multicolored Mastic for Carpet Square
- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)
- 2"x4" Ceiling Tile

Building F – 8 Materials – 0 ACBM

- New 2’ x 2’ Ceiling Tile
- Old 2’ x 2’ Ceiling Tile
- Lightly Textured 2’ x 2’ Ceiling Tile
- Gray Multicolor Carpet Square
- Mastic for Gray Multicolor Carpet Square
- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

Building G – 6 Materials – 0 ACBM

- Lightly Textured 2’ x 2’ Ceiling Tile
- New 2’ x 2’ Ceiling Tile
- Old 2’ x 2’ Ceiling Tile
- Gray Multi-Color Carpet Square
- Mastic for Gray Multi-Color Carpet Square
- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

Building H – 7 Materials – 0 ACBM

- New 2’ x 2’ Ceiling Tile
- Old 2’ x 2’ Ceiling Tile
- Gray Muli-Color Carpet Square
- Mastic for Gray Muli-Color Carpet Square
- Blue Cove Base
- Cream Mastic for Blue Cove Base
- Orange Peel Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

All the suspect bulk samples collected from Kyrene Centennial Middle School were submitted to EMLab P&K (EMLab) in Phoenix, Arizona for analysis using Polarized Light Microscopy (PLM) methods. EMLab used the methods prescribed in Method 40 CFR, Part 763, in the Code of Federal Register in analyzing bulk samples. EMLab is certified by the National *Institute of Standards* and Technology as a National Voluntary Laboratory Accreditation Program (NVLAP), Number 500031-0. The suspect asbestos bulk samples were collected and submitted to the laboratory using established chain-of-custody procedures.

Bulk samples were collected utilizing safety and health practices as required by the Occupational Safety and Health Administration (OSHA). At the time of sample collection, the buildings were not occupied by students. Only limited administrative and custodial staff were present on campus.

ASSUMED ACBM – June 20 & June 23, 2025 – June 24, 2025

Due to budgetary constraints, KESD instructed Dominion to assume any unsampled suspect building materials as asbestos containing until further asbestos bulk sampling can be budgeted and conducted. Therefore, listed below, separated by building, are the three hundred and seventy-nine (379) building materials that were assumed to contain greater than one percent (>1%) asbestos.

Building A – 33 Assumed ACBM

- Black Carpet Square
- Mastic for Black Carpet Square
- Interior Caulking

- Exterior Caulking
- Tackboard
- Mastic for Tackboard
- Window Glazing
- Brick
- Mortar for Brick
- Glass Block Mortar
- Block
- Mortar for Block
- Black Sink Coating
- Gray Wallpaper
- Fixture Caulking
- FRP
- Mastic for FRP
- Brown Cove Base
- Mastic for Brown Cove Base
- Knockdown Drywall System
- Tan Striped Wallpaper
- Large Pipe Wrap
- Mastic for Large Pipe Wrap
- Small Pipe Wrap
- Mastic for Small Pipe Wrap
- Black Pipe Insulation Foam
- Silver Box Duct Wrap
- Silver Duct Wrap
- Silver Flex Duct Wrap
- White Duct Seam Tape
- Mastic for Duct Seam Tape
- Unfinished Drywall System
- Silver Duct Tape

Building B – 43 Assumed ACBM

- Black Entry Carpet
- Mastic for Entry Carpet
- Interior Caulking
- Exterior Caulking
- Black Sink Coating
- FRP
- Mastic for FRP
- Tackboard
- Mastic for Tackboard
- White 2” x 2” Ceramic Floor Tile

- Grout for White 2” x 2” Ceramic Floor Tile
- Thinset for White 2” x 2” Ceramic Floor Tile
- Peach 2” x 2” Ceramic Floor Tile
- Grout for Peach 2” x 2” Ceramic Floor Tile
- Thinset for Peach 2” x 2” Ceramic Floor Tile
- Blue 2” x 2” Ceramic Floor Tile
- Grout for Blue 2” x 2” Ceramic Floor Tile
- Thinset for Blue 2” x 2” Ceramic Floor Tile
- Off-White 4” x 4” Ceramic Wall Tile
- Grout for Off-White 4” x 4” Ceramic Wall Tile
- Mastic for Off-White 4” x 4” Ceramic Wall Tile
- Peach 4” x 4” Ceramic Wall Tile
- Grout for Peach 4” x 4” Ceramic Wall Tile
- Mastic for Peach 4” x 4” Ceramic Wall Tile
- Fixture Caulking
- Brown Cove Base
- Mastic for Cove Base
- White w. Black 12” x 12”VCT
- Mastic for White w. Black 12” x 12”VCT
- Knockdown Drywall System
- Brick
- Mortar for Brick
- Expansion Joint
- Silver Box Duct Wrap
- Silver Duct Wrap
- Silver Flex Duct Wrap
- White Duct Tape
- Mastic for Duct Tape
- Large Pipe Wrap
- Mastic for Pipe Wrap
- Small Pipe Wrap
- Mastic for Pipe Wrap
- Unfinished Drywall System

Building C – 45 Assumed ACBM

- Black Entry Carpet
- Mastic for Entry Carpet
- Interior Caulking
- Black Sink Coating
- Exterior Caulking
- Tackboard
- Mastic for Tackboard

- Knockdown Drywall System
- Brown Cove Base
- Mastic for Cove Base
- White w. Black 12" x 12" VCT
- Mastic for White w. Black 12" x 12" VCT
- Divider Wall
- White 2" x 2" Ceramic Floor Tile
- Grout for White 2" x 2" Ceramic Floor Tile
- Thinset White 2" x 2" Ceramic Floor Tile
- Peach 2" x 2" Ceramic Floor Tile
- Grout for Peach 2" x 2" Ceramic Floor Tile
- Thinset Peach2" x 2" Ceramic Floor Tile
- Blue 2" x 2" Ceramic Floor Tile
- Grout for Blue 2" x 2" Ceramic Floor Tile
- Thinset Blue 2" x 2" Ceramic Floor Tile
- Off-white 4" x 4" Ceramic Wall Tile
- Grout for Off-white 4" x 4" Ceramic Wall Tile
- Mastic Blue Off-white 4" x 4" Ceramic Wall Tile
- Peach 4" x 4" Ceramic Wall Tile
- Grout for Peach 4" x 4" Ceramic Wall Tile
- Mastic Blue Peach 4" x 4" Ceramic Wall Tile
- Fixture Caulking
- FRP
- Mastic for FRP
- Black Countertops
- Brick
- Mortar for Brick
- Expansion Joint
- Silver Box Duct Wrap
- Silver Duct Wrap
- Silver Flex Duct Wrap
- White Duct Tape
- Mastic for Duct Tape
- Large Pipe Wrap
- Mastic for Large Pipe Wrap
- Small Pipe Wrap
- Mastic for Small Pipe Wrap
- Unfinished Drywall System

Building D – 45 Assumed ACBM

- Black Entry Carpet
- Mastic for Entry Carpet

- Interior Caulking
- Exterior Caulking
- Black Sink Coating
- Tackboard
- Mastic for Tackboard
- Knockdown Drywall
- White w. Black 12" x 12" VCT
- Mastic for White w. Black 12" x 12" VCT
- Black Countertops
- FRP
- Mastic for FRP
- Brown Cove Base
- Mastic for Cove Base
- Divider Wall
- White 2" x 2" Ceramic Floor Tile
- Grout for White 2" x 2" Ceramic Floor Tile
- Thinset for White 2" x 2" Ceramic Floor Tile
- Peach 2" x 2" Ceramic Floor Tile
- Grout for Peach 2" x 2" Ceramic Floor Tile
- Thinset for Peach 2" x 2" Ceramic Floor Tile
- Blue 2" x 2" Ceramic Floor Tile
- Grout for Blue 2" x 2" Ceramic Floor Tile
- Thinset for Blue 2" x 2" Ceramic Floor Tile
- Off-White 4" x 4" Ceramic Wall Tile
- Grout for Off-White 4" x 4" Ceramic Wall Tile
- Mastic for Off-White 4" x 4" Ceramic Wall Tile
- Peach 4" x 4" Ceramic Wall Tile
- Grout for Peach 4" x 4" Ceramic Wall Tile
- Mastic for Peach 4" x 4" Ceramic Wall Tile
- Fixture Caulking
- Brick
- Mortar for Brick
- Expansion Joint
- Silver Box Duct Wrap
- Silver Duct Wrap
- Silver Flex Duct Wrap
- White Duct Tape
- Mastic for Duct Tape
- Large Pipe Wrap
- Mastic for Large Pipe Wrap
- Small Pipe Wrap
- Mastic for Small Pipe Wrap
- Unfinished Drywall System

Building E – 86 Assumed ACBM

- Black Entry Carpet
- Mastic
- Blue Cove Base
- Mastic for Cove Base
- Interior Caulking
- Exterior Caulking
- Black Window Glazing
- Black Sink Coating
- Divider Wall
- Blue 6" Cove Base
- Mastic for Blue 6" Cove Base
- Black 6" Cove Base
- Mastic for Black 6" Cove Base
- Gray Speckled 12" x 12" VCT
- Mastic for Gray VCT
- Brick
- Mortar for Brick
- Expansion Joint
- Black L Shaped Cove Base
- Mastic for L Shaped Cove Base
- Old FRP
- Mastic for Old FRP
- Tackboard
- Mastic for Tackboard
- Brown 6" Cove Base
- Mastic for 6" Cove Base
- Brown 4" Cove Base
- Mastic for Brown 4" Cove Base
- White w/ Gray Specks 12" X 12" VCT
- Mastic
- New FRP
- Mastic for New FRP
- Brown 6" x 6" Ceramic Floor Tile
- Grout for Brown 6" x 6" Ceramic Floor Tile
- Thinset for Brown 6" x 6" Ceramic Floor Tile
- Brown 4" x 6" Ceramic Cove Base
- Mastic for Brown 4" x 6" Ceramic Cove Base
- Drywall 2' x 4' Ceiling Tile
- Polished Concrete
- Floor Expansion Joint for Polished Concrete

- White w. Black 12" x 12" VCT
- Mastic for 12" x 12" VCT
- Black 4" Cove Base
- Mastic for Black 4" Cove Base
- White 4" x 4" Ceramic Wall Tile
- Grout for White 4" x 4" Ceramic Wall Tile
- Mastic for White 4" x 4" Ceramic Wall Tile
- Red 4" x 4" Ceramic Wall Tile
- Grout for Red 4" x 4" Ceramic Wall Tile
- Mastic for Red 4" x 4" Ceramic Wall Tile
- Black 4" x 4" Ceramic Wall Tile
- Grout for Black 4" x 4" Ceramic Wall Tile
- Mastic for Black 4" x 4" Ceramic Wall Tile
- Gray Floor Coating
- Fixture Caulking
- Glass Block Mortar
- Red 3" x 12" Ceramic Wall Tile
- Gray FRP
- Mastic for FRP
- Concrete Benches
- Gray 6" x 6" Ceramic Floor Tile
- Grout for Gray 6" x 6" Ceramic Floor Tile
- Thinset for Gray 6" x 6" Ceramic Floor Tile
- Green Speckled 2" x 2" Ceramic Floor Tile
- Grout for Ceramic Floor Tile
- Thinset for Ceramic Floor Tile
- Gray 2" x 2" Ceramic Floor Tile
- Grout for Ceramic Floor Tile
- Thinset for Ceramic Floor Tile
- Peach 4" x 4" Ceramic Wall Tile
- Grout for Peach 4" x 4" Ceramic Wall Tile
- Thinset for Peach 4" x 4" Ceramic Wall Tile
- Gray 4" x 4" Ceramic Wall Tile
- Grout for Gray 4" x 4" Ceramic Wall Tile
- Thinset for Gray 4" x 4" Ceramic Wall Tile
- Silver Box Duct Wrap
- Silver Duct Wrap
- Silver Flex Duct Wrap
- White Duct Tape
- Mastic for Duct Tape
- Gray Duct Mastic
- Large Pipe Wrap
- Mastic for Large Pipe Wrap

- Small Pipe Wrap
- Mastic for Pipe Wrap
- Unfinished Drywall

Building F – 38 Assumed ACBM

- Blue Cove Base
- Mastic for Blue Cove Base
- Interior Caulking
- Exterior Caulking
- Black Window Glazing
- Tackboard
- Mastic for Tackboard
- White w. Black 12" x 12" VCT
- Mastic for VCT
- Fixture Caulking
- Gray Sink Coating
- Brown Cove Base
- Mastic for Brown Cove Base
- Polished Concrete
- Floor Expansion Joint for Polished Concrete
- Gray Duct Mastic
- Black Rubber Gym Floor
- Black Cove Base
- Mastic for Black Cove Base
- Gray Wood Vinyl Flooring
- Mastic for Gray Wood Vinyl Flooring
- Divider Wall
- Brick
- Mortar for Brick
- Expansion Joint
- Large Pipe Wrap
- Mastic for Large Pipe Wrap
- Small Pipe Wrap
- Mastic for Pipe Wrap
- Black Pipe Foam Insulation
- Silver Box Duct Wrap
- Silver Duct Wrap
- Silver Flex Duct Wrap
- White Duct Tape
- Mastic for Duct Tape
- Unfinished Drywall
- Silver Duct Tape

- Skylight Insulation Panel

Building G – 32 Assumed ACBM

- Black Entry Carpet
- Mastic for Entry Carpet
- Blue Cove Base
- Mastic for Cove Base
- Interior Caulking
- Exterior Caulking
- Black Sink Coating
- Tackboard
- Mastic for Tackboard
- White w. Black 12" x 12" VCT
- Mastic for VCT
- Green Wallpaper
- Glass Block Mortar
- White w. Gray 12" x 12" VCT
- Mastic for VCT
- Gray Wallpaper
- Knockdown Drywall
- Brown Cove Base
- Mastic for Brown Cove Base
- Large Pipe Wrap
- Mastic for Large Pipe Wrap
- Small Pipe Wrap
- Mastic for Pipe Wrap
- Black Pipe Foam Insulation
- Silver Box Duct Wrap
- Silver Duct Wrap
- Silver Flex Duct Wrap
- White Duct Tape
- Mastic for Duct Tape
- Unfinished Drywall
- Silver Duct Tape
- Skylight Insulation Panel

Building H – 57 Assumed ACBM

- Black Entry Carpet
- Mastic for Black Entry Carpet
- Interior Caulking
- Exterior Caulking

- Black Sink Coating
- Tackboard
- Mastic for Tackboard
- White Sink Coating
- Fume Hood Panel
- Tan Speckled 12" x 12" VCT
- Mastic for Tan Speckled 12" x 12" VCT
- Gray Cove Base
- Mastic for Gray Cove Base
- FRP
- Mastic for FRP
- Smooth Drywall
- White w. Gray Specks 12" x 12" VCT
- Mastic for White w. Gray Specks 12" x 12" VCT
- Divider Wall
- Block
- Mortar for Block
- Brick
- Mortar for Brick
- Off-White 4" x 4" Ceramic Wall Tile
- Mastic for Off-White 4" x 4" Ceramic Wall Tile
- Grout for Off-White 4" x 4" Ceramic Wall Tile
- Peach 4" x 4" Ceramic Wall Tile
- Mastic for Peach 4" x 4" Ceramic Wall Tile
- Grout for Peach 4" x 4" Ceramic Wall Tile
- Gray 4" x 4" Ceramic Wall Tile
- Mastic for Gray 4" x 4" Ceramic Wall Tile
- Grout for Gray 4" x 4" Ceramic Wall Tile
- Off-White 2" x 2" Ceramic Floor Tile
- Grout for Off-White 2" x 2" Ceramic Floor Tile
- Thinset for Off-White 2" x 2" Ceramic Floor Tile
- Green Speckled 2" x 2" Ceramic Floor Tile
- Grout for 2" x 2" Ceramic Floor Tile
- Thinset for 2" x 2" Ceramic Floor Tile
- Gray Speckled 2" x 2" Ceramic Floor Tile
- Grout for 2" x 2" Ceramic Floor Tile
- Thinset for 2" x 2" Ceramic Floor Tile
- Fixture Caulking
- Glass Block Mortar
- Knockdown Drywall
- Large Pipe Wrap
- Mastic for Large Pipe Wrap
- Small Pipe Wrap

- Mastic for Pipe Wrap
- Black Pipe Foam Insulation
- Silver Box Duct Wrap
- Silver Duct Wrap
- Silver Flex Duct Wrap
- White Duct Tape
- Mastic for Duct Tape
- Unfinished Drywall
- Silver Duct Tape
- Skylight Insulation Panel

INSPECTION FINDINGS

INITIAL LIMITED AHERA ASBESTOS SURVEY – January 15, 2021

All twenty-two (22) of the homogeneous building materials sampled during the January 2021 inspection within the Main Office, Lounge, Work Room, D1, Restroom, and Storage of Building 500 were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

2022 LIMITED AHERA ASBESTOS SURVEY – July 12, 2022

All twelve (12) of the homogeneous building materials sampled during the July 2022 inspection within the Janitor's Closet of Building 300 were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

2024 AHERA ASBESTOS INSPECTION – March 12, 2024

The thirty-nine (39) homogeneous building materials sampled during the March 2024 inspection within Kyrene Centennial Middle School were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

2025 AHERA ASBESTOS RE-INSPECTION – August 4-12, 2025

All fifty-four (54) of the homogeneous building materials sampled during the August 2025 inspection were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

As shown above, three hundred and seventy-nine (379) suspect homogeneous building materials were *assumed* to contain greater than one percent (>1%) asbestos.

RECOMMENDATIONS

Any building material within the Kyrene Centennial Middle School campus not identified in this inspection report that is not wood, glass, or metal, is a suspect ACBM and should not be removed, sanded, ground, abraded, or otherwise disturbed by any person without being first properly trained as per 40 CFR 763.92 and, or 29 CFR 1926.1101. For detailed recommendations, please refer to the Kyrene Centennial Middle School AHERA Management Plan.

The ACBM or assumed ACBM located within the structures of the Kyrene Centennial Middle School campus can be managed in compliance with the Kyrene Elementary School District AHERA Management Plan until such a time as these building materials become degraded, have become friable, or will be disturbed by ongoing maintenance, renovation, or a demolition activity. Prior to a renovation or demolition activity, the previously listed assumed ACBM should be sampled by an AHERA Certified Building Inspector to determine the presence of asbestos.


At least once every six (6) months after a management plan is in effect, the KESD should conduct periodic surveillance in each building that it leases, owns, or otherwise uses as a school building that contains ACBM.

At least once every three (3) years after a management plan is in effect, the KESD should conduct an inspection of all ACBM on the school campus.

The AHERA inspection is limited to only the interior of the buildings and the underside of any covered walkways. This would mean that the additional suspect building materials found on the exterior of the buildings or structures, that are not regulated by AHERA are regulated by EPA NESHAP and OSHA. Therefore, prior to any disturbance of these un-sampled or newly installed suspect building materials, Dominion recommends that these suspect materials be sampled by an AHERA Certified Building Inspector and analyzed for asbestos content by a qualified laboratory prior to any disturbance.

The property owner or his representatives should retain the services of an independent asbestos consulting firm to monitor the performance of any asbestos abatement activities. The consulting firm should oversee the completeness of any asbestos removal and verify the quality of the air during the removal work and perform final clearance air sampling in accordance with the AHERA guidelines.

All documentation is being provided to the Kyrene Elementary School District and must be retained as a permanent record. Should you have any questions regarding the procedures that were followed on this project, please contact Dominion at any time. Thank you for the opportunity to provide these environmental consulting services.



2025 AHERA Building Inspector
Nick Marcos
AHERA Certificate Number: ON-188748-8873-031325
Expires: March 13, 2026

Historical Information:

2024 AHERA Building Inspector
Tracey Carpenter
AHERA Certificate Number: ON-4644-14588-091422
Expired: September 14, 2023


2022 AHERA Building Inspector
Nick Marcos
AHERA Certificate Number: ON-4644-8873-032422
Expired: March 24, 2023

2021 AHERA Building Inspector
Garth Backman
AHERA Certificate Number: ON-4644-12304-071621
Expired: July 16, 2022

SECTION 4

♦

SITE MAPS

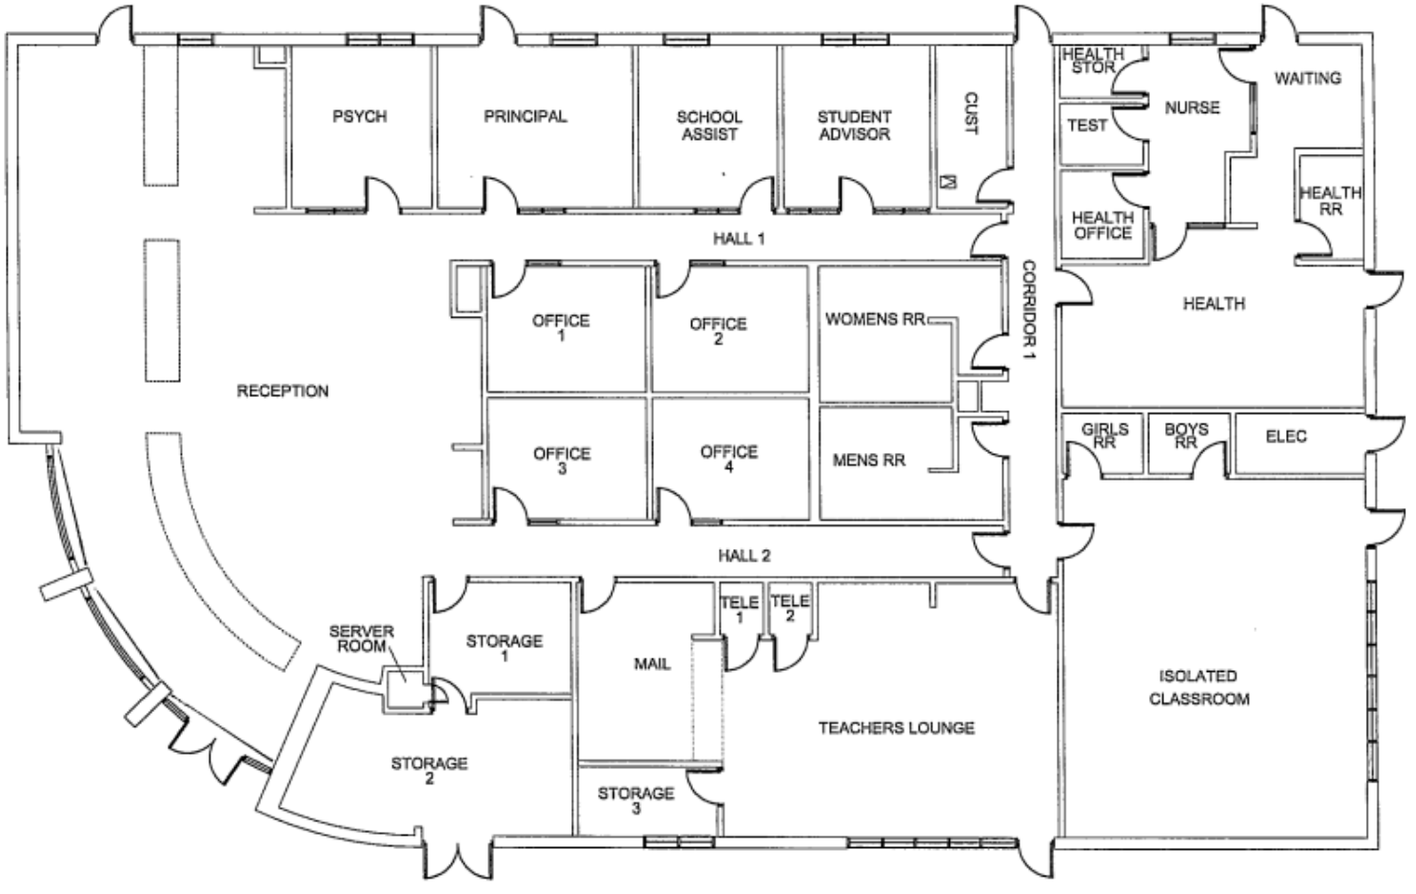


Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Admin Building

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

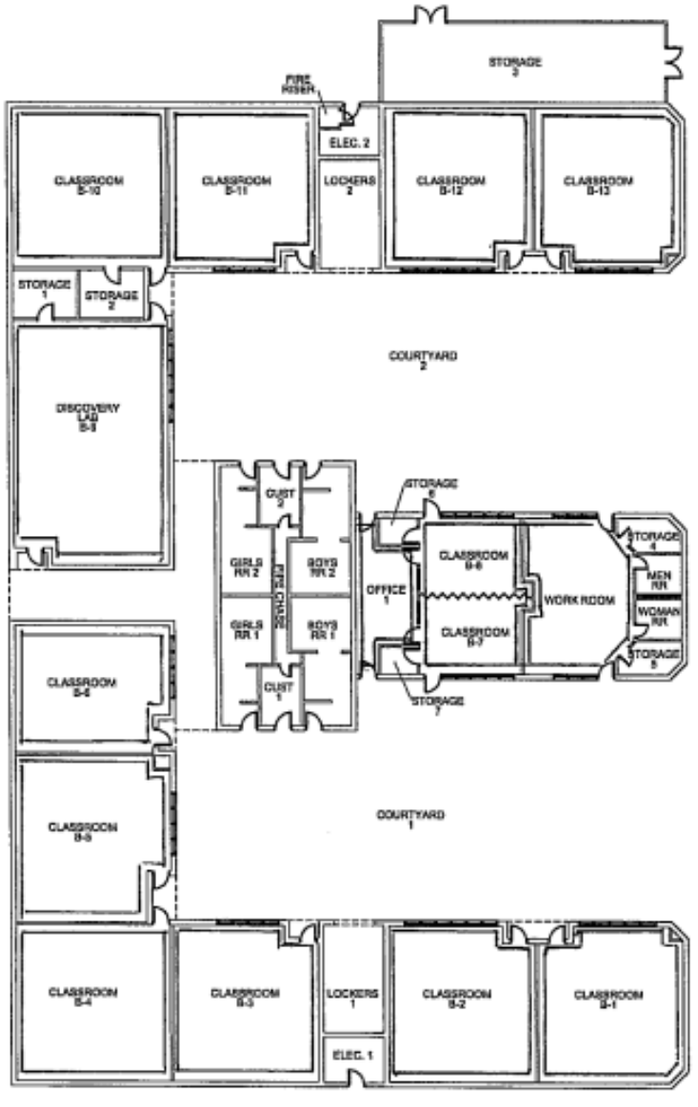


Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building B

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

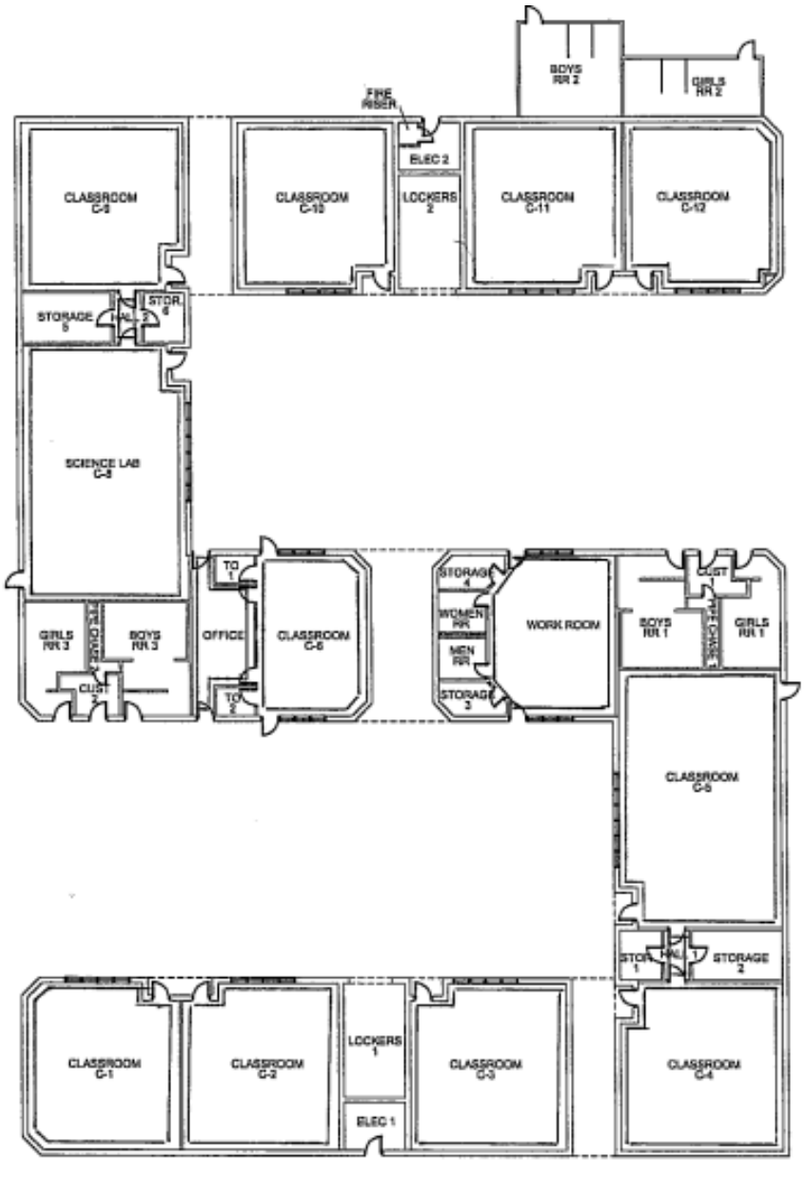


Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building C

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

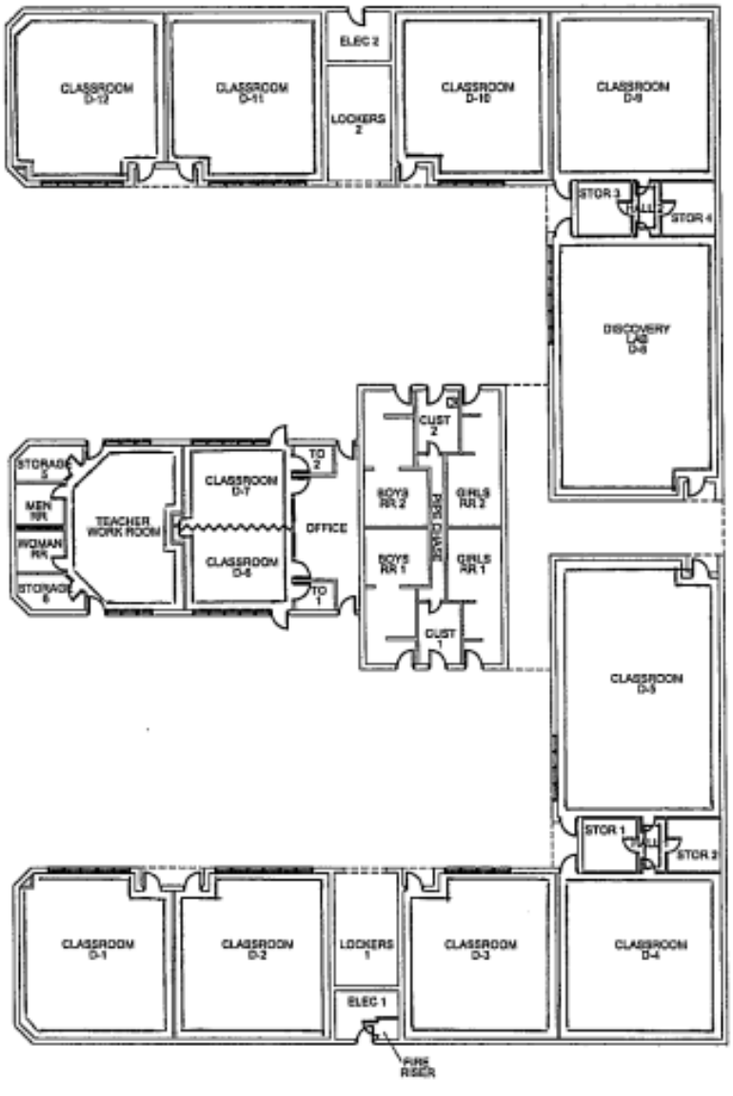


N

Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building D

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

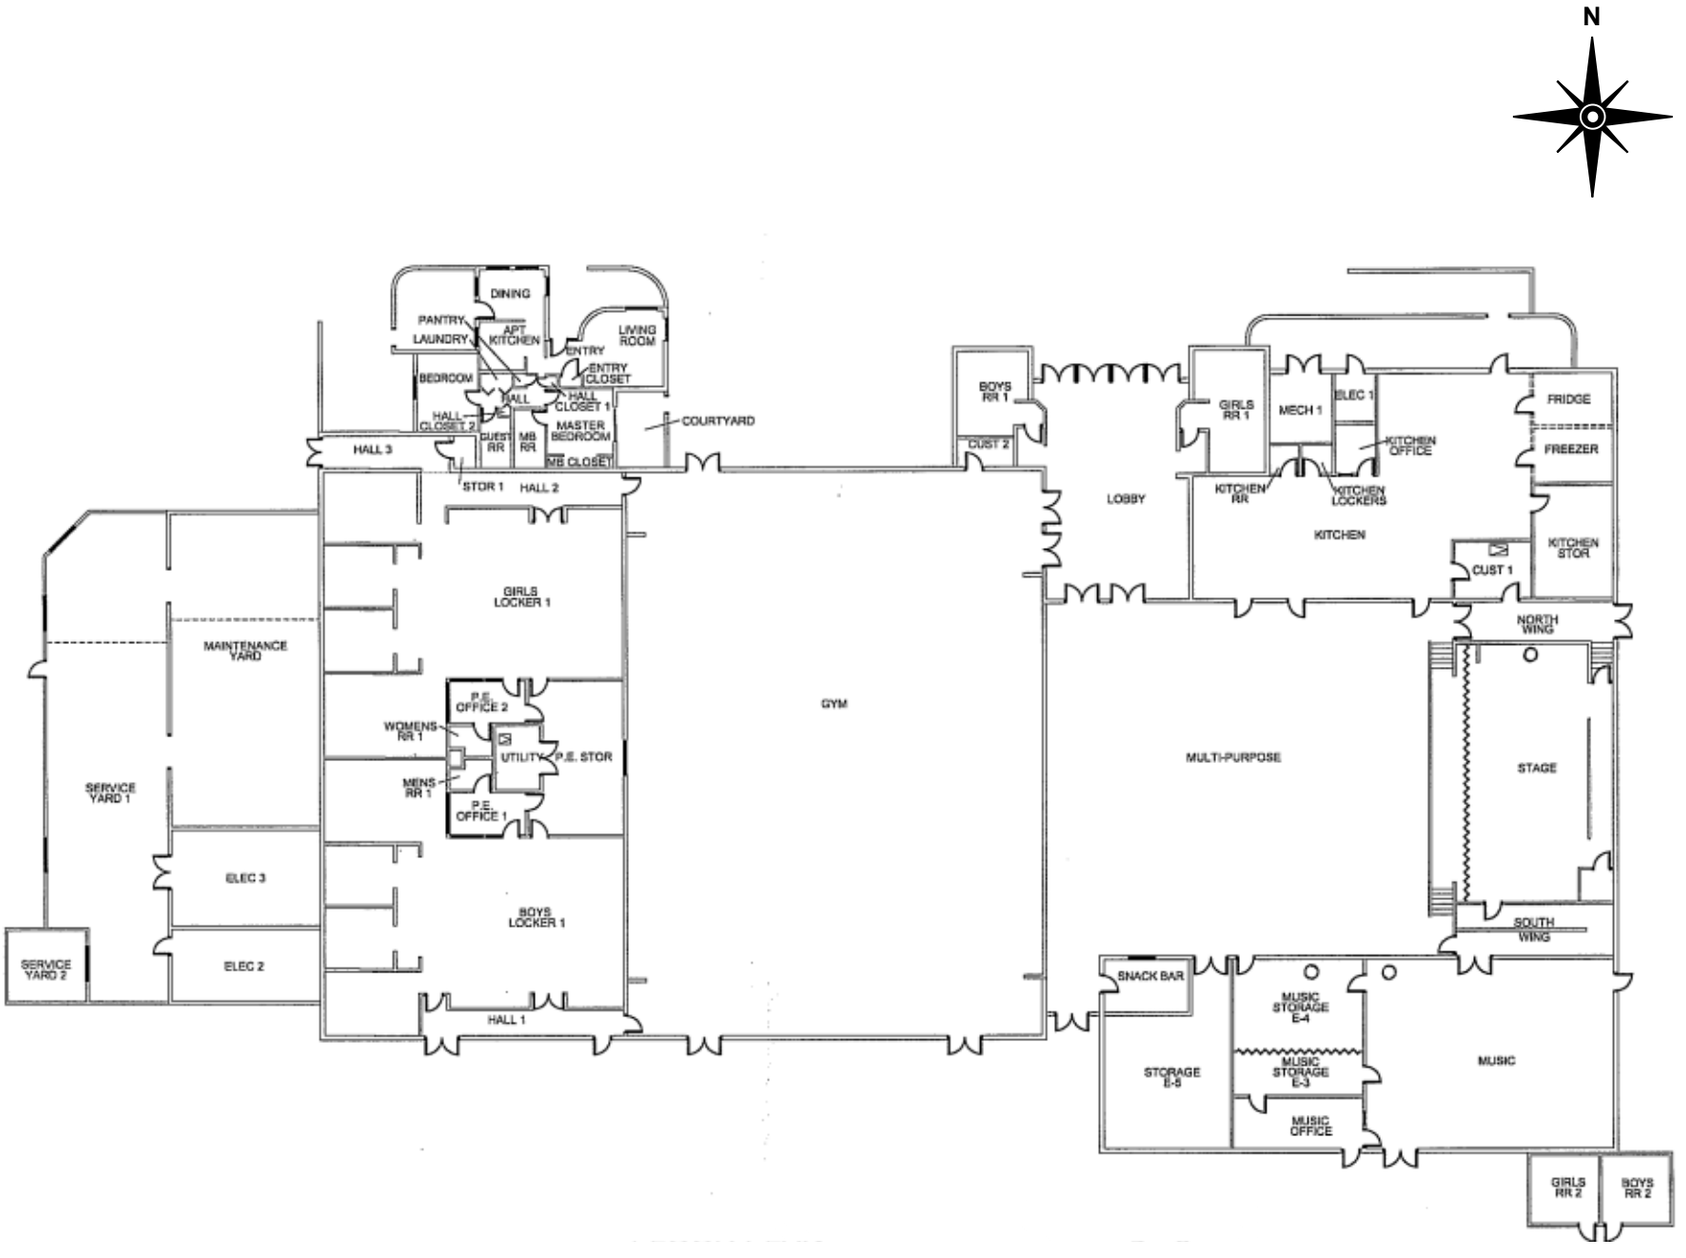


Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building E

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

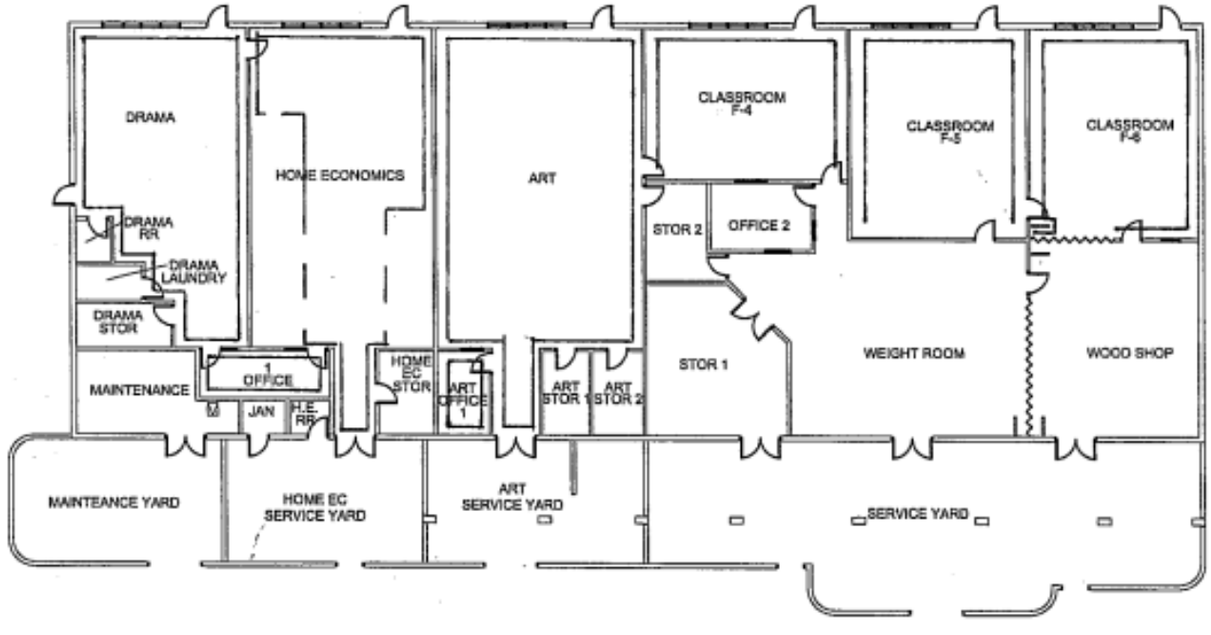


Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building F

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

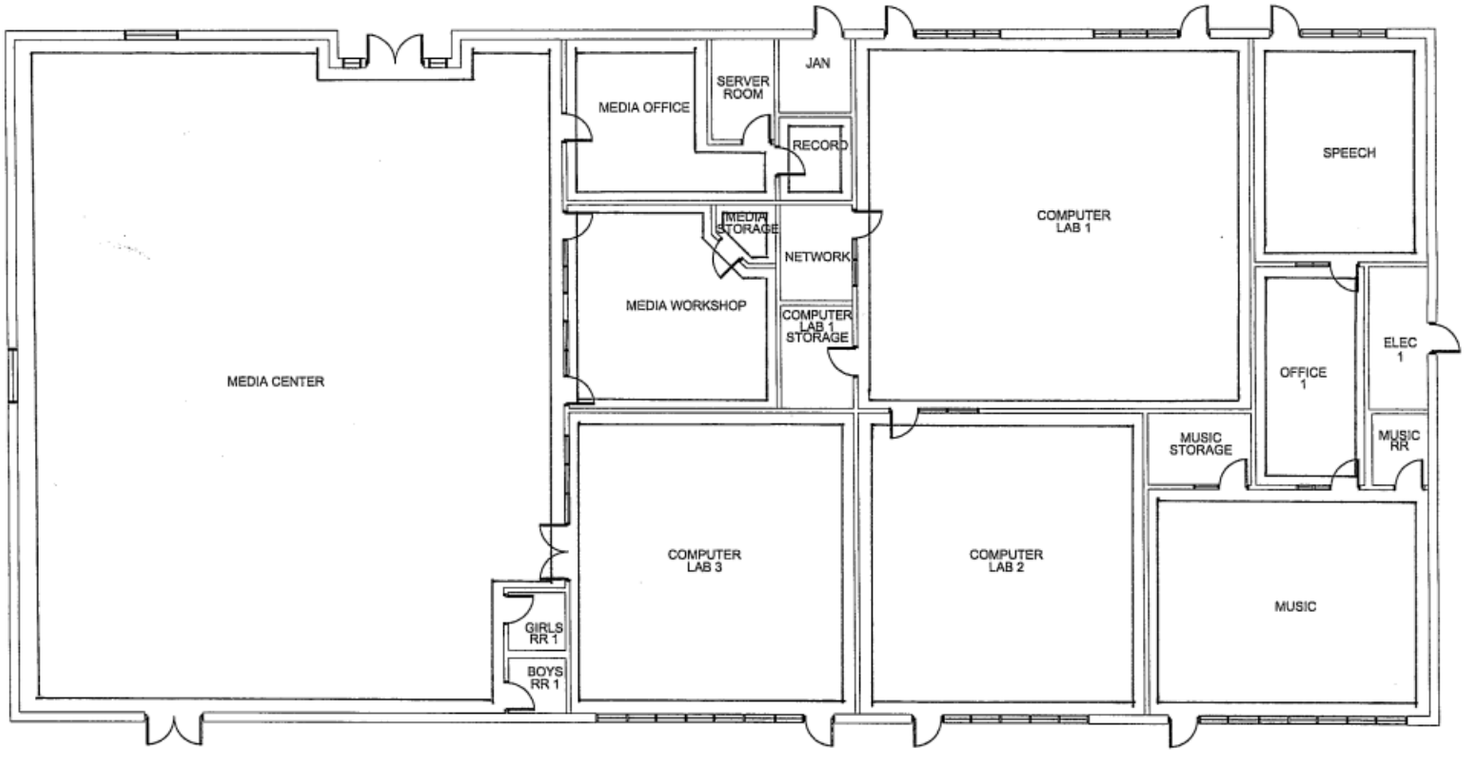


Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building G

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

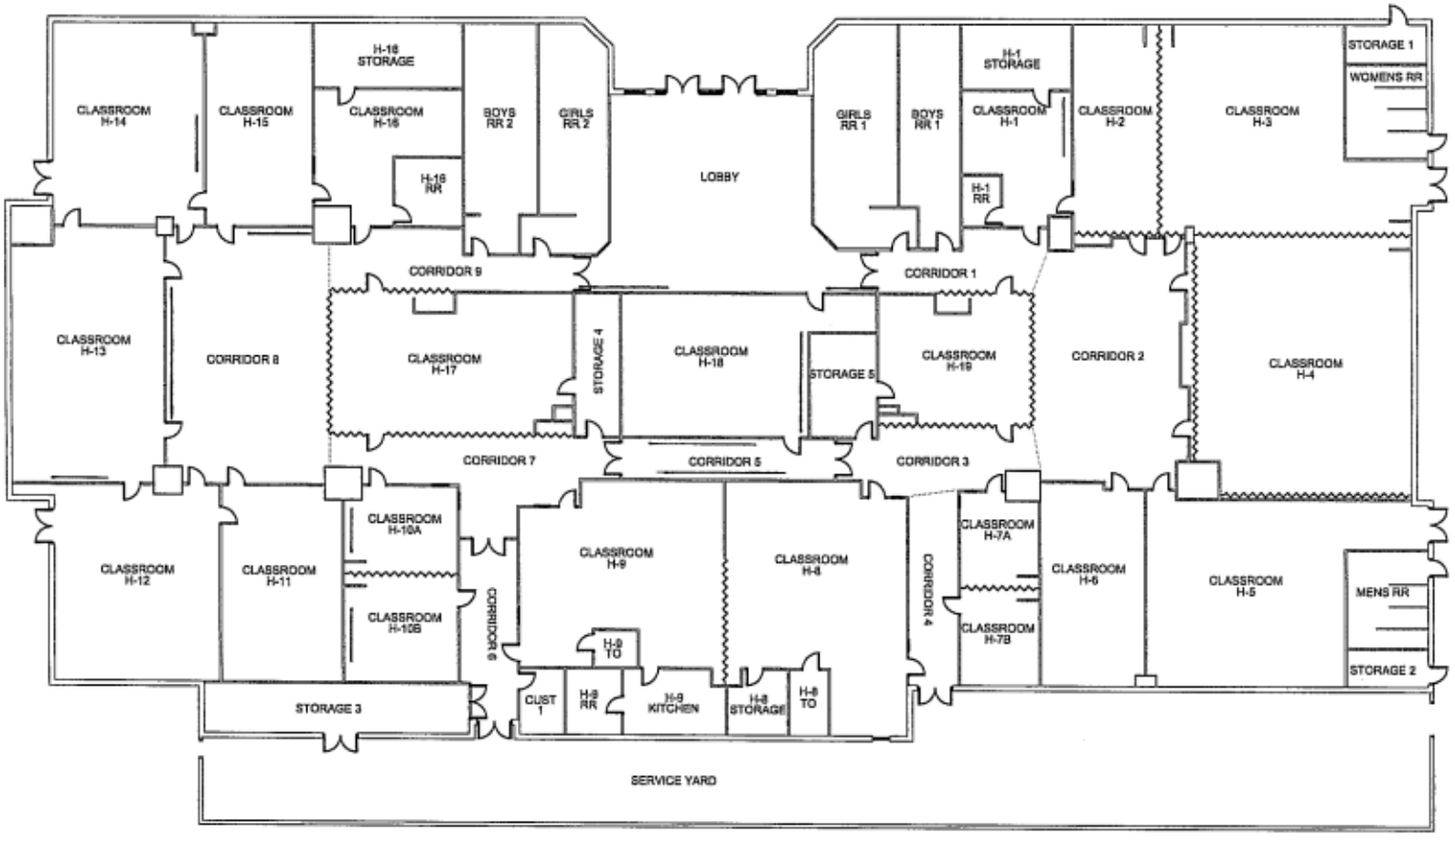

Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building H

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

SECTION 5

♦

HOMOGENEOUS MATERIALS INVENTORY LISTS

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.54	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 3/12/2024 + 8/4/2025	**Site: Kyrene Centennial Middle School - Admin Building**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
Inspection Date: 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)						
1	Skip Trowel Drywall System - Peach Paint #1	Custodian and Restroom	No	No	M	3,000
	White Texture #1		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound #1		No	No	M	
	Peach Paint #2		No	No	M	
	White Joint Compound #2		No	No	M	
	Yellow Tape (Mesh)		No	No	M	
	Peach Paint #3		No	No	M	
	White Texture #2		No	No	M	
	White Drywall with Brown Paper		No	No	M	
2	White w/Gray Specks 12" x 12"' VCT	Custodian and Restroom	No	No	M	5000
3	Semi-Transparent Mastic for 12" x 12" VCT		No	No	M	5000
Inspection Date: 8/4/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)						
4	New 2' x 2' Ceiling Tile	Throughout Building	No	No	M	20,000
5	Old 2' x 2' Ceiling Tile	Throughout Building	No	No	M	30,000
6	Gray Multi-Color Carpet Square	Front Office and ISI Room	No	No	M	50,000
7	Tan Mastic for Gray Multi-Color Carpet Square		No	No	B	50,000
8	Blue Cove Base	Hallway and Office	No	No	M	750
9	Cream Mastic Blue Cove Base		No	No	M	
10	Beige Paint	Throughout Building	No	No	M	20,000
	Orange Peel Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Assumed Material						
11	**Black Carpet Square**	**Throughout Building**	**Assumed**	**No**	**M**	**1,000**
12	**Mastic for Black Carpet Square**		**Assumed**	**No**	**M**	

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.54	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 3/12/2024 + 8/4/2025	Site: Kyrene Centennial Middle School - Admin Building

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
13	Interior Caulking	Throughout Building	Assumed	No	M	200
14	Exterior Caulking	Throughout Building	Assumed	No	M	200
15	Tackboard	Offices	Assumed	No	M	15,000
16	Mastic for Tackboard		Assumed	No	M	
17	Window Glazing	Throughout Building	Assumed	No	M	100
18	Brick	Building Exterior	Assumed	No	M	100,000
19	Mortar for Brick		Assumed	No	M	
20	Glass Block Mortar	Building Entrance	Assumed	No	M	500
21	Block	Building Exterior	Assumed	No	M	50,000
22	Mortar for Block		Assumed	No	M	
23	Black Sink Coating	Teachers Lounge/Break Room	Assumed	No	M	50
24	Gray Wallpaper	Telephone Room	Assumed	No	M	750
25	Fixture Caulking	Restrooms	Assumed	No	M	100
26	FRP	Custodian and Drinking Fountains Throughout	Assumed	No	M	250
27	Mastic for FRP		Assumed	No	M	
28	Brown Cove Base	Custodian	Assumed	No	M	100
29	Mastic for Brown Cove Base		Assumed	No	M	
30	Knockdown Drywall System	Custodian	Assumed	No	M	1,500
31	Tan Striped Wallpaper	Nurses Closet	Assumed	No	M	500
32	Large Pipe Wrap	Above Ceiling	Assumed	No	M	3,000
33	Mastic for Large Pipe Wrap		Assumed	No	M	
34	Small Pipe Wrap	Above Ceiling	Assumed	No	M	1,500
35	Mastic for Small Pipe Wrap		Assumed	No	M	
36	Black Pipe Insulation Foam	Above Ceiling	Assumed	No	TSI	500
37	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	5,000
38	Silver Duct Wrap	Above Ceiling	Assumed	No	M	5,000
39	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	3,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.54	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 3/12/2024 + 8/4/2025	Site: Kyrene Centennial Middle School - Admin Building

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
40	White Duct Seam Tape	Above Ceiling	Assumed	No	M	1,000
41	Mastic for Duct Seam Tape		Assumed	No	M	
42	Unfinished Drywall System	Above Ceiling	Assumed	No	M	20,000
43	Silver Duct Tape	Above Ceiling	Assumed	No	M	250

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 3/12/2024 + 8/5/2025	**Site: Kyrene Centennial Middle School - Building B**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
Inspection Date: 3/11/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)						
1	Tan Ceramic Tile	Restrooms	No	No	M	250
2	Cream Mastic for Tile		No	No	M	250
3	Gray Grout for Tile		No	No	M	100
4	Gray Mortar for Tile		No	No	M	100
5	White Ceramic Tile ND	Restrooms	No	No	M	250
6	Gray Grout ND		No	No	M	100
7	Gray Caulk ND		No	No	M	100
8	Tan Mastic		No	No	M	250
Inspection Date: 8/5/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)						
9	New 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	20000
10	Old 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	30000
11	Gray Multi-Color Carpet Square	Classrooms	No	No	M	15000
12	Yellow Mastic for Carpet Square		No	No	M	
13	Blue Cove Base	Classrooms	No	No	M	500
14	Yellow Mastic for Cove Base		No	No	M	
15	Orange Peel Drywall System - Off-White Paint	Throughout Building	No	No	M	75000
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Assumed Material						
16	**Black Entry Carpet**	**Entrances**	**Assumed**	**No**	**M**	**375**
17	**Mastic for Entry Carpet**		**Assumed**	**No**	**M**	
18	**Interior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**200**
19	**Exterior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**200**
20	**Black Sink Coating**	**Classrooms**	**Assumed**	**No**	**M**	**60**
21	**FRP**	**Custodial and Drinking Fountains**	**Assumed**	**No**	**M**	**350**
22	**Mastic for FRP**		**Assumed**	**No**	**M**	

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 3/12/2024 + 8/5/2025	Site: Kyrene Centennial Middle School - Building B

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
23	Tackboard	Classrooms	Assumed	No	M	15,000
24	Mastic for Tackboard		Assumed	No	M	
25	White 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	3,000
26	Grout for White 2" x 2" Ceramic Floor Tile		Assumed	No	M	
27	Thinset for White 2" x 2" Ceramic Floor Tile		Assumed	No	M	
28	Peach 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	1,000
29	Grout for Peach 2" x 2" Ceramic Floor Tile		Assumed	No	M	
30	Thinset for Peach 2" x 2" Ceramic Floor Tile		Assumed	No	M	
31	Blue 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	1,000
32	Grout for Blue 2" x 2" Ceramic Floor Tile		Assumed	No	M	
33	Thinset for Blue 2" x 2" Ceramic Floor Tile		Assumed	No	M	
34	Off-White 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	5,000
35	Grout for Off-White 4" x 4" Ceramic Wall Tile		Assumed	No	M	
36	Mastic for Off-White 4" x 4" Ceramic Wall Tile		Assumed	No	M	
37	Peach 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	1,000
38	Grout for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
39	Mastic for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
40	Fixture Caulking	Restrooms	Assumed	No	M	100
41	Brown Cove Base	Custodial	Assumed	No	M	45
42	Mastic for Cove Base		Assumed	No	M	
43	White w. Black 12" x 12" VCT	B7 Closets, Work Room RR's, and Storage Rooms	Assumed	No	M	3,000
44	Mastic for White w. Black 12" x 12" VCT		Assumed	No	M	
45	Knockdown Drywall System	Electrical	Assumed	No	M	2,000
46	Brick	Building Exterior	Assumed	No	M	100,000
47	Mortar for Brick		Assumed	No	M	
48	Expansion Joint	Building Exterior	Assumed	No	M	200
49	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	5,000
50	Silver Duct Wrap	Above Ceiling	Assumed	No	M	4,000
51	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	3,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 3/12/2024 + 8/5/2025	Site: Kyrene Centennial Middle School - Building B

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
52	White Duct Tape	Above Ceiling	Assumed	No	M	1,000
53	Mastic for Duct Tape		Assumed	No	M	
54	Large Pipe Wrap	Above Ceiling	Assumed	No	M	3,000
55	Mastic for Pipe Wrap		Assumed	No	M	
56	Small Pipe Wrap	Above Ceiling	Assumed	No	M	2,000
57	Mastic for Pipe Wrap		Assumed	No	M	
58	Unfinished Drywall System	Above Ceiling	Assumed	No	M	20,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 3/12/2024 + 8/5/2025	**Site: Kyrene Centennial Middle School - Building C**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
Inspection Date: 3/11/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)						
1	White Ceramic Tile	Restrooms	No	No	M	250
2	Gray Grout for Tile		No	No	M	
3	Tan Mastic for Tile		No	No	M	
Inspection Date: 8/5/2025 - AHERA Building Inspector: Nick Marcos(ON-188748-8873-031325)						
4	New 2' x 2' Ceiling Tile	Throughout Building	No	No	M	20,000
5	Old 2' x 2' Ceiling Tile	Throughout Building	No	No	M	30,000
6	Gray Multi-Color Carpet Square	Conference Room and Classrooms	No	No	M	15,000
7	Tan Mastic for Gray Multi-Color Carpet Square		No	No	M	
8	Blue Cove Base	Classrooms	No	No	M	500
9	Cream Mastic for Blue Cove Base		No	No	M	
10	Orange Peel Drywall - Cream Paint	Throughout Building	No	No	M	75000
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	Cream Tape 2		No	No	M	
	White Joint Compound 2		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Assumed Material						
11	**Black Entry Carpet**	**Entrance to Building**	**Assumed**	**No**	**M**	**375**
12	**Mastic for Entry Carpet**		**Assumed**	**No**	**M**	
13	**Interior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**200**
14	**Black Sink Coating**	**Sinks Throughout Building**	**Assumed**	**No**	**M**	**60**
15	**Exterior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**200**
16	**Tacboard**	**Throughout Building**	**Assumed**	**No**	**M**	**15000**
17	**Mastic for Tacboard**		**Assumed**	**No**	**M**	
18	**Knockdown Drywall System**	**Electrical**	**Assumed**	**No**	**M**	**2,000**
19	**Brown Cove Base**	**Electrical and Custodial**	**Assumed**	**No**	**M**	**45**
20	**Mastic for Cove Base**		**Assumed**	**No**	**M**	

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 3/12/2024 + 8/5/2025	Site: Kyrene Centennial Middle School - Building C

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
21	White w. Black 12" x 12" VCT	Storage and Work Room Restroom	Assumed	No	M	3,000
22	Mastic for White w. Black 12" x 12" VCT		Assumed	No	M	
23	Divider Wall	Rooms C6 and C7	Assumed	No	M	2,000
24	White 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	3,000
25	Grout for White 2" x 2" Ceramic Floor Tile		Assumed	No	M	
26	Thinset White 2" x 2" Ceramic Floor Tile		Assumed	No	M	
27	Peach 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	1,000
28	Grout for Peach 2" x 2" Ceramic Floor Tile		Assumed	No	M	
29	Thinset Peach2" x 2" Ceramic Floor Tile		Assumed	No	M	
30	Blue 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	1,000
31	Grout for Blue 2" x 2" Ceramic Floor Tile		Assumed	No	M	
32	Thinset Blue 2" x 2" Ceramic Floor Tile		Assumed	No	M	
33	Off-white 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	5,000
34	Grout for Off-white 4" x 4" Ceramic Wall Tile		Assumed	No	M	
35	Mastic Blue Off-white 4" x 4" Ceramic Wall Tile		Assumed	No	M	
36	Peach 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	1,000
37	Grout for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
38	Mastic Blue Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
39	Fixture Caulking	Restrooms	Assumed	No	M	100
40	FRP	Custodial	Assumed	No	M	350
41	Mastic for FRP		Assumed	No	M	
42	Black Countertops	Rooms C5 and C8	Assumed	No	M	5,000
43	Brick	Building Exterior	Assumed	No	M	100,000
44	Mortar for Brick		Assumed	No	M	
45	Expansion Joint	Building Exterior	Assumed	No	M	200
46	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	5,000
47	Silver Duct Wrap	Above Ceiling	Assumed	No	M	4,000
48	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	3,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 3/12/2024 + 8/5/2025	Site: Kyrene Centennial Middle School - Building C

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
49	White Duct Tape	Above Ceiling	Assumed	No	M	1,000
50	Mastic for Duct Tape		Assumed	No	M	
51	Large Pipe Wrap	Above Ceiling	Assumed	No	M	3,000
52	Mastic for Large Pipe Wrap		Assumed	No	M	
53	Small Pipe Wrap	Above Ceiling	Assumed	No	M	2,000
54	Mastic for Small Pipe Wrap		Assumed	No	M	
55	Unfinished Drywall System	Above Ceiling	Assumed	No	M	20,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 7/11/22 + 3/12/24 + 8/5/25	**Site: Kyrene Centennial Middle School - Building D**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
Inspection Date:7/11/2022 - AHERA Building Inspector: Nick Marcos (ON-4644-8873-032422)						
1	Orange Peel Drywall - Off-White Paint #3	Throughout Building	No	No	M	75,000
	White Texture #3		No	No	M	
	Off-White Paint #4		No	No	M	
	White Texture #4		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	Brown Drywall with Brown/Green Paper		No	No	M	
2	Brown Cove Base	Faculty Restroom	No	No	M	15
3	Yellow Mastic for Brown Cove Base		No	No	M	
4	Blue Cove Base	Faculty Restroom	No	No	M	15
5	Yellow Mastic for Blue Cove Base		No	No	M	
6	Counter Caulking	Faculty Restroom	No	No	M	10
7	Fixture Caulking	Faculty Restroom	No	No	M	10
Inspection Date: 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)						
8	White Ceramic Tile	Restrooms	No	No	M	400
9	Gray Grout for Tile		No	No	M	
10	Tan Mastic for Tile		No	No	M	
11	2" x 2" Tan Floor Tiles	Restrooms	No	No	M	350
12	Gray Grout for Tile		No	No	M	
13	Yellow Mastic for Tile		No	No	M	
14	2" x 2" Pink Floor Tile	Restrooms	No	No	M	300
15	Gray Grout for Tile		No	No	M	
16	Beige Thinset for Tile		No	No	M	
17	2" x 2" Green Floor Tile	Restrooms	No	No	M	300
18	Gray Grout for Tile		No	No	M	
19	Beige Thinset for Tile		No	No	M	
Inspection Date: 8/5/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)						
20	New 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	20,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 7/11/22 + 3/12/24 + 8/5/25	**Site: Kyrene Centennial Middle School - Building D**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
21	Old 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	30,000
22	Gray Multicolored Carpet Square	Classrooms	No	No	M	15,000
23	Multicolored Mastic for Carpet Square		No	No	M	
24	Blue Cove Base	Classrooms	No	No	M	500
25	Cream Mastic for Cove Base		No	No	M	
26	Orange Peel Drywall - Off-White Paint	Throughout Building	No	No	M	75,000
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Assumed Material						
27	**Black Entry Carpet**	**Entrance to Building**	**Assumed**	**No**	**M**	**375**
28	**Mastic for Entry Carpet**		**Assumed**	**No**	**M**	
29	**Interior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**200**
30	**Exterior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**200**
31	**Black Sink Coating**	**Classrooms**	**Assumed**	**No**	**M**	**60**
32	**Tackboard**	**Throughout Building**	**Assumed**	**No**	**M**	**15,000**
33	**Mastic for Tackboard**		**Assumed**	**No**	**M**	
34	**Knockdown Drywall**	**Electrical Room**	**Assumed**	**No**	**M**	**2,000**
35	**White w. Black 12" x 12" VCT**	**Storage Rooms**	**Assumed**	**No**	**M**	**3,000**
36	**Mastic for White w. Black 12" x 12" VCT**		**Assumed**	**No**	**M**	
37	**Black Countertops**	**Rooms D5 and D8**	**Assumed**	**No**	**M**	**5,000**
38	**FRP**	**Custodial**	**Assumed**	**No**	**M**	**350**
39	**Mastic for FRP**		**Assumed**	**No**	**M**	
40	**Brown Cove Base**	**Storage Rooms**	**Assumed**	**No**	**M**	**45**
41	**Mastic for Cove Base**		**Assumed**	**No**	**M**	
42	**Divider Wall**	**Rooms D6 and D7**	**Assumed**	**No**	**M**	**2,000**

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 7/11/22 + 3/12/24 + 8/5/25	Site: Kyrene Centennial Middle School - Building D

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
43	White 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	3,000
44	Grout for White 2" x 2" Ceramic Floor Tile		Assumed	No	M	
45	Thinset for White 2" x 2" Ceramic Floor Tile		Assumed	No	M	
46	Peach 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	1,000
47	Grout for Peach 2" x 2" Ceramic Floor Tile		Assumed	No	M	
48	Thinset for Peach 2" x 2" Ceramic Floor Tile		Assumed	No	M	
49	Blue 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	1,000
50	Grout for Blue 2" x 2" Ceramic Floor Tile		Assumed	No	M	
51	Thinset for Blue 2" x 2" Ceramic Floor Tile		Assumed	No	M	
52	Off-White 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	5,000
53	Grout for Off-White 4" x 4" Ceramic Wall Tile		Assumed	No	M	
54	Mastic for Off-White 4" x 4" Ceramic Wall Tile		Assumed	No	M	
55	Peach 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	1,000
56	Grout for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
57	Mastic for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
58	Fixture Caulking	Restrooms	Assumed	No	M	100
59	Brick	Building Exterior	Assumed	No	M	100,000
60	Mortar for Brick		Assumed	No	M	
61	Expansion Joint	Building Exterior	Assumed	No	M	200
62	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	5,000
63	Silver Duct Wrap	Above Ceiling	Assumed	No	M	4,000
64	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	3,000
65	White Duct Tape	Above Ceiling	Assumed	No	M	1,000
66	Mastic for Duct Tape		Assumed	No	M	
67	Large Pipe Wrap	Above Ceiling	Assumed	No	M	3,000
68	Mastic for Large Pipe Wrap		Assumed	No	M	
69	Small Pipe Wrap	Above Ceiling	Assumed	No	M	2,000
70	Mastic for Small Pipe Wrap		Assumed	No	M	
71	Unfinished Drywall System	Above Ceiling	Assumed	No	M	20,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025	**Site: Kyrene Centennial Middle School - Building E**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
Inspection Date: 9/29/2021 - AHERA Building Inspector: Garth Backman (ON-4644-12304-071621)						
1	Drywall - Beige Paint	Kitchen	No	No	M	2,500
	White Texture		No	No	M	
	Off-White Paint		No	No	M	
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Inspection Date: 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)						
2	Red 12" x 12" VCT	Service Line	No	No	M	450
3	Mastic for Red 12" x 12" VCT		No	No	M	450
4	Brown Stair Tread	Stage	No	No	M	250
5	Cream Mastic for Brown Stair Tread		No	No	M	
6	White RR Wall Tiles	Restrooms	No	No	M	4000
7	Grout for White RR Wall Tiles		No	No	M	
8	White 2"x2" Floor Tiles	Restrooms	No	No	M	3000
9	Dark Gray Grout for Tile		No	No	M	
10	Dark Gray Thinset for Tile		No	No	M	
Inspection Date: 8/6/2025 - AHERA Building Inspector: ()						
11	New 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	40,000
12	Old 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	50000
13	Peach Soundboard Wrap	Band Room	No	No	M	3,000
14	Yellow Adhesive for Wrap		No	No	M	
15	Gray Multicolored Carpet Square	Storage Room and Classroom	No	No	M	6,000
16	Multicolored Mastic for Carpet Square		No	No	M	

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025	Site: Kyrene Centennial Middle School - Building E

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
17	Orange Peel Drywall - Off-White Paint	Throughout Building	No	No	M	90,000
	White Texture		No	No	M	
	Yellow Paint		No	No	M	
	White Texture 2		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
18	2' x 4' Ceiling Tile	Apartment Unit	No	No	M	2,000
Assumed Material						
19	**Black Entry Carpet**	**Building Entrance**	**Assumed**	**No**	**M**	**500**
20	**Mastic**		**Assumed**	**No**	**M**	
21	**Blue Cove Base**	**Throughout Building**	**Assumed**	**No**	**M**	**750**
22	**Mastic for Cove Base**		**Assumed**	**No**	**M**	
23	**Interior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**200**
24	**Exterior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**200**
25	**Black Window Glazing**	**Windows Throughout**	**Assumed**	**No**	**M**	**300**
26	**Black Sink Coating**	**Classrooms Throughout**	**Assumed**	**No**	**M**	**50**
27	**Divider Wall**	**Stage**	**Assumed**	**No**	**M**	**1500**
28	**Blue 6" Cove Base**	**Ramp**	**Assumed**	**No**	**M**	**150**
29	**Mastic for Blue 6" Cove Base**		**Assumed**	**No**	**M**	
30	**Black 6" Cove Base**	**Multipurpose Room**	**Assumed**	**No**	**M**	**350**
31	**Mastic for Black 6" Cove Base**		**Assumed**	**No**	**M**	
32	**Gray Speckled 12" x 12" VCT**	**Gym Janitors Closet**	**Assumed**	**No**	**M**	**150**
33	**Mastic for Gray VCT**		**Assumed**	**No**	**M**	
34	**Brick**	**Throughout Building**	**Assumed**	**No**	**M**	**150,000**
35	**Mortar for Brick**		**Assumed**	**No**	**M**	
36	**Expansion Joint**	**Throughout Building**	**Assumed**	**No**	**M**	**250**
37	**Black L Shaped Cove Base**	**Stage and Gym**	**Assumed**	**No**	**M**	**500**
38	**Mastic for L Shaped Cove Base**		**Assumed**	**No**	**M**	

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025	Site: Kyrene Centennial Middle School - Building E

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
39	Old FRP	Ramp Hallway and Gym Janitors Closet	Assumed	No	M	750
40	Mastic for Old FRP		Assumed	No	M	
41	Tackboard	Throughout Building	Assumed	No	M	15,000
42	Mastic for Tackboard		Assumed	No	M	
43	Brown 6" Cove Base	Stage Entry	Assumed	No	M	45
44	Mastic for 6" Cove Base		Assumed	No	M	
45	Brown 4" Cove Base	Locker Room Storage	Assumed	No	M	75
46	Mastic for Brown 4" Cove Base		Assumed	No	M	
47	White w/ Gray Specks 12" X 12" VCT	Northeast Stage Entry	Assumed	No	M	100
48	Mastic		Assumed	No	M	
49	New FRP	Kitchen and Custodial	Assumed	No	M	1,500
50	Mastic for New FRP		Assumed	No	M	
51	Brown 6" x 6" Ceramic Floor Tile	Kitchen and Snack Bar	Assumed	No	M	10,000
52	Grout for Brown 6" x 6" Ceramic Floor Tile		Assumed	No	M	
53	Thinset for Brown 6" x 6" Ceramic Floor Tile		Assumed	No	M	
54	Brown 4" x 6" Ceramic Cove Base	Kitchen and Snack Bar	Assumed	No	M	1,500
55	Mastic for Brown 4" x 6" Ceramic Cove Base		Assumed	No	M	
56	Drywall 2' x 4' Ceiling Tile	Kitchen and Snack Bar	Assumed	No	M	3,000
57	Polished Concrete	Throughout Building	Assumed	No	M	15,000
58	Floor Expansion Joint for Polished Concrete		Assumed	No	M	150
59	White w. Black 12" x 12" VCT	Locker Room Storage	Assumed	No	M	250
60	Mastic for 12" x 12" VCT		Assumed	No	M	
61	Black 4" Cove Base	Lobby and Locker Rooms	Assumed	No	M	300
62	Mastic for Black 4" Cove Base		Assumed	No	M	
63	White 4" x 4" Ceramic Wall Tile	Lobby Restrooms and Locker Rooms	Assumed	No	M	6,000
64	Grout for White 4" x 4" Ceramic Wall Tile		Assumed	No	M	
65	Mastic for White 4" x 4" Ceramic Wall Tile		Assumed	No	M	

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025	Site: Kyrene Centennial Middle School - Building E

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
66	Red 4" x 4" Ceramic Wall Tile	Lobby Restrooms and Locker Rooms	Assumed	No	M	2,000
67	Grout for Red 4" x 4" Ceramic Wall Tile		Assumed	No	M	
68	Mastic for Red 4" x 4" Ceramic Wall Tile		Assumed	No	M	
69	Black 4" x 4" Ceramic Wall Tile	Lobby Restrooms and Locker Rooms	Assumed	No	M	500
70	Grout for Black 4" x 4" Ceramic Wall Tile		Assumed	No	M	
71	Mastic for Black 4" x 4" Ceramic Wall Tile		Assumed	No	M	
72	Gray Floor Coating	Lobby Restrooms	Assumed	No	M	1,500
73	Fixture Caulking	Restrooms	Assumed	No	M	200
74	Glass Block Mortar	Main Entry's	Assumed	No	M	350
75	Red 3" x 12" Ceramic Wall Tile	Lobby Restroom	Assumed	No	M	3,000
76	Gray FRP	Locker Room Hallways	Assumed	No	M	2,000
77	Mastic for FRP		Assumed	No	M	
78	Concrete Benches	Locker Rooms	Assumed	No	M	2,500
79	Gray 6" x 6" Ceramic Floor Tile	Locker Rooms Showers	Assumed	No	M	3,000
80	Grout for Gray 6" x 6" Ceramic Floor Tile		Assumed	No	M	
81	Thinset for Gray 6" x 6" Ceramic Floor Tile		Assumed	No	M	
82	Green Speckled 2" x 2" Ceramic Floor Tile	Main Exterior Restrooms	Assumed	No	M	500
83	Grout for Ceramic Floor Tile		Assumed	No	M	
84	Thinset for Ceramic Floor Tile		Assumed	No	M	
85	Gray 2" x 2" Ceramic Floor Tile	Main Exterior Restrooms	Assumed	No	M	500
86	Grout for Ceramic Floor Tile		Assumed	No	M	
87	Thinset for Ceramic Floor Tile		Assumed	No	M	
88	Peach 4" x 4" Ceramic Wall Tile	Main Exterior Restrooms	Assumed	No	M	500
89	Grout for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
90	Thinset for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
91	Gray 4" x 4" Ceramic Wall Tile	Main Exterior Restrooms	Assumed	No	M	500
92	Grout for Gray 4" x 4" Ceramic Wall Tile		Assumed	No	M	
93	Thinset for Gray 4" x 4" Ceramic Wall Tile		Assumed	No	M	

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025	Site: Kyrene Centennial Middle School - Building E

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
94	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	6,000
95	Silver Duct Wrap	Above Ceiling	Assumed	No	M	5,000
96	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	4,000
97	White Duct Tape	Above Ceiling	Assumed	No	M	1,500
98	Mastic for Duct Tape	Above Ceiling	Assumed	No	M	
99	Gray Duct Mastic	Above Ceiling	Assumed	No	M	200
100	Large Pipe Wrap	Above Ceiling	Assumed	No	M	5,000
101	Mastic for Large Pipe Wrap		Assumed	No	M	
102	Small Pipe Wrap	Above Ceiling	Assumed	No	M	3,000
103	Mastic for Pipe Wrap		Assumed	No	M	
104	Unfinished Drywall	Above Ceiling	Assumed	No	M	25,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 8/4/2025	**Site: Kyrene Centennial Middle School - Building F**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
Inspection Date: 8/4/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)						
1	New 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	10,000
2	Old 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	15000
3	Lightly Textured 2' x 2' Ceiling Tile	FACS Room	No	Yes	M	2,000
4	Gray Multicolor Carpet Square	Classrooms	No	No	M	6500
5	Mastic for Gray Multicolor Carpet Square		No	No	M	
6	Orange Peel Drywall - White Paint	Throughout Building	No	No	M	50,000
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Assumed Material						
7	**Blue Cove Base**	**Classrooms**	**Assumed**	**No**	**M**	**350**
8	**Mastic for Blue Cove Base**		**Assumed**	**No**	**M**	
9	**Interior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**150**
10	**Exterior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**150**
11	**Black Window Glazing**	**Throughout Building**	**Assumed**	**No**	**M**	**100**
12	**Tackboard**	**Classrooms**	**Assumed**	**No**	**M**	**10,000**
13	**Mastic for Tackboard**		**Assumed**	**No**	**M**	
14	**White w. Black 12" x 12" VCT**	**Choir Storage, Restroom, and Laundry Room**	**Assumed**	**No**	**M**	**1,500**
15	**Mastic for VCT**		**Assumed**	**No**	**M**	
16	**Fixture Caulking**	**Restrooms**	**Assumed**	**No**	**M**	**100**
17	**Gray Sink Coating**	**Rooms F-1, F-3, and F-5**	**Assumed**	**No**	**M**	**15**
18	**Brown Cove Base**	**Choir Storage, Restroom, Dark Room, and Laundry Room**	**Assumed**	**No**	**M**	**100**
19	**Mastic for Brown Cove Base**		**Assumed**	**No**	**M**	
20	**Polished Concrete**	**Room F-2**	**Assumed**	**No**	**M**	**1,500**
21	**Floor Expansion Joint for Polished Concrete**		**Assumed**	**No**	**M**	**100**
22	**Gray Duct Mastic**	**Above Ceiling**	**Assumed**	**No**	**M**	**100**
23	**Black Rubber Gym Floor**	**Room F-5**	**Assumed**	**No**	**M**	**2,000**

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 8/4/2025	Site: Kyrene Centennial Middle School - Building F

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
24	Black Cove Base	Room F-5 and F-6 Backroom	Assumed	No	M	100
25	Mastic for Black Cove Base		Assumed	No	M	
26	Gray Wood Vinyl Flooring	Room F-5 and F-6 Backroom	Assumed	No	M	1,000
27	Mastic for Gray Wood Vinyl Flooring		Assumed	No	M	
28	Divider Wall	Room F-5 and F-6	Assumed	No	M	1,500
29	Brick	Throughout Building	Assumed	No	M	75,000
30	Mortar for Brick		Assumed	No	M	
31	Expansion Joint	Throughout Building	Assumed	No	M	150
32	Large Pipe Wrap	Above Ceiling	Assumed	No	M	3,000
33	Mastic for Large Pipe Wrap		Assumed	No	M	
34	Small Pipe Wrap	Above Ceiling	Assumed	No	M	2,000
35	Mastic for Pipe Wrap		Assumed	No	M	
36	Black Pipe Foam Insulation	Above Ceiling	Assumed	No	TSI	150
37	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	3,000
38	Silver Duct Wrap	Above Ceiling	Assumed	No	M	2,000
39	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	2,500
40	White Duct Tape	Above Ceiling	Assumed	No	M	200
41	Mastic for Duct Tape	Above Ceiling	Assumed	No	M	
42	Unfinished Drywall	Above Ceiling	Assumed	No	M	1,500
43	Silver Duct Tape	Above Ceiling	Assumed	No	M	150
44	Skylight Insulation Panel	Above Ceiling	Assumed	Yes	M	2,500

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 8/4/2025	**Site: Kyrene Centennial Middle School - Building G**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
Inspection Date: 8/4/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)						
1	Lightly Textured 2' x 2' Ceiling Tile	Media Center	No	Yes	M	2,500
2	New 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	10000
3	Old 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	15,000
4	Gray Multi-color Carpet Square	Media Center and Storage	No	No	M	
5	Mastic for Gray Multi-Color Carpet Square		No	No	M	10000
6	Orange Peel Drywall - Off-White Paint	Throughout Building	No	No	M	50,000
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Assumed Material						
7	**Black Entry Carpet**	**Building Entrances**	**Assumed**	**No**	**M**	**250**
8	**Mastic for Entry Carpet**		**Assumed**	**No**	**M**	
9	**Blue Cove Base**	**Throughout Building**	**Assumed**	**No**	**M**	**350**
10	**Mastic for Cove Base**		**Assumed**	**No**	**M**	
11	**Interior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**100**
12	**Exterior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**100**
13	**Black Sink Coating**	**Office Sink**	**Assumed**	**No**	**M**	**10**
14	**Tackboard**	**Classrooms and Media Center**	**Assumed**	**No**	**M**	**10,000**
15	**Mastic for Tackboard**		**Assumed**	**No**	**M**	
16	**White w. Black 12" x 12" VCT**	**Throughout Building**	**Assumed**	**No**	**M**	**750**
17	**Mastic for VCT**		**Assumed**	**No**	**M**	
18	**Green Wallpaper**	**Media Center Restroom**	**Assumed**	**No**	**M**	**400**
19	**Glass Block Mortar**	**Building Entrances**	**Assumed**	**No**	**M**	**250**
20	**White w. Gray 12" x 12" VCT**	**IDF Room**	**Assumed**	**No**	**M**	**350**
21	**Mastic for VCT**		**Assumed**	**No**	**M**	
22	**Gray Wallpaper**	**Storage**	**Assumed**	**No**	**M**	**250**
23	**Knockdown Drywall**	**Custodian Closet**	**Assumed**	**No**	**M**	**1,000**

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 8/4/2025	Site: Kyrene Centennial Middle School - Building G

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
24	Brown Cove Base	Computer Lab Storage	Assumed	No	M	45
25	Mastic for Brown Cove Base		Assumed	No	M	
26	Large Pipe Wrap	Above Ceiling	Assumed	No	M	3,000
27	Mastic for Large Pipe Wrap		Assumed	No	M	
28	Small Pipe Wrap	Above Ceiling	Assumed	No	M	2,000
29	Mastic for Pipe Wrap		Assumed	No	M	
30	Black Pipe Foam Insulation	Above Ceiling	Assumed	No	M	100
31	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	3,000
32	Silver Duct Wrap	Above Ceiling	Assumed	No	M	2,000
33	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	2,000
34	White Duct Tape	Above Ceiling	Assumed	No	M	250
35	Mastic for Duct Tape	Above Ceiling	Assumed	No	M	
36	Unfinished Drywall	Above Ceiling	Assumed	No	M	10,000
37	Silver Duct Tape	Above Ceiling	Assumed	No	M	50
38	Skylight Insulation Panel	Above Ceiling	Assumed	Yes	M	1,500

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	**Client: Kyrene Elementary School District No. 28**
Inspection Date(s): 3/12/2024 + 8/6/2025	**Site: Kyrene Centennial Middle School - Building H**

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
Inspection Date: 3/11/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)						
1	Orange Peel Drywall - Multicolored Paint Layers	Throughout Building	No	No	M	80,000
	White Texture		No	No	M	
	White Drywall with Brown Paper		No	No	M	
2	Tac Board	Classrooms	No	No	M	1500
3	White 12" x 12" VCT	Storage Rooms	No	No	M	650
4	Transparent Mastic for White 12" x 12" VCT		No	No	M	
Inspection Date:8/6/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)						
5	New 2' x 2' Ceiling Tile	Classrooms	No	Yes	M	20,000
6	Old 2' x 2' Ceiling Tile	Throughout Building	No	Yes	M	30000
7	Gray Muli-Color Carpet Square	Classrooms	No	No	M	20000
8	Mastic for Gray Muli-Color Carpet Square		No	No	M	
9	Blue Cove Base	Throughout Building	No	No	M	750
10	Cream Mastic for Blue Cove Base		No	No	M	
11	Orange Peel Drywall - White Paint	Throughout Building	No	No	M	80,000
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Assumed Material						
12	**Black Entry Carpet**	**Building Entrances**	**Assumed**	**No**	**M**	**250**
13	**Mastic for Black Entry Carpet**		**Assumed**	**No**	**M**	
14	**Interior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**150**
15	**Exterior Caulking**	**Throughout Building**	**Assumed**	**No**	**M**	**150**
16	**Black Sink Coating**	**Classrooms**	**Assumed**	**No**	**M**	**100**
17	**Tackboard**	**Throughout Building**	**Assumed**	**No**	**M**	**15,000**
18	**Mastic for Tackboard**		**Assumed**	**No**	**M**	
19	**White Sink Coating**	**Room H-11**	**Assumed**	**No**	**M**	**5**
20	**Fume Hood Panel**	**Room H-11 and H-6**	**Assumed**	**No**	**M**	**50**

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 3/12/2024 + 8/6/2025	Site: Kyrene Centennial Middle School - Building H

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
21	Tan Speckled 12" x 12" VCT	Storage and Janitors Closet	Assumed	No	M	500
22	Mastic for Tan Speckled 12" x 12" VCT		Assumed	No	M	
23	Gray Cove Base	Storages, H-8 Office, and Workroom Restroom	Assumed	No	M	250
24	Mastic for Gray Cove Base		Assumed	No	M	
25	FRP	Janitors Closet and H-9 Restroom	Assumed	No	M	300
26	Mastic for FRP		Assumed	No	M	
27	Smooth Drywall	Janitors Closet	Assumed	No	M	2,500
28	White w. Gray Specks 12" x 12" VCT	Room H-9, H-6, H-8, and Storages	Assumed	No	M	3,000
29	Mastic for White w. Gray Specks 12" x 12" VCT		Assumed	No	M	
30	Divider Wall	Rooms H-7, H-8, and H-9	Assumed	No	M	3,000
31	Block	Throughout Building	Assumed	No	M	75,000
32	Mortar for Block		Assumed	No	M	
33	Brick	Throughout Building	Assumed	No	M	75,000
34	Mortar for Brick		Assumed	No	M	
35	Off-White 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	4,000
36	Mastic for Off-White 4" x 4" Ceramic Wall Tile		Assumed	No	M	
37	Grout for Off-White 4" x 4" Ceramic Wall Tile		Assumed	No	M	
38	Peach 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	500
39	Mastic for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
40	Grout for Peach 4" x 4" Ceramic Wall Tile		Assumed	No	M	
41	Gray 4" x 4" Ceramic Wall Tile	Restrooms	Assumed	No	M	500
42	Mastic for Gray 4" x 4" Ceramic Wall Tile		Assumed	No	M	
43	Grout for Gray 4" x 4" Ceramic Wall Tile		Assumed	No	M	
44	Off-White 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	3,000
45	Grout for Off-White 2" x 2" Ceramic Floor Tile		Assumed	No	M	
46	Thinset for Off-White 2" x 2" Ceramic Floor Tile		Assumed	No	M	

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Inspection Date(s): 3/12/2024 + 8/6/2025	Site: Kyrene Centennial Middle School - Building H

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approx. Quantity (sq. ft.)
47	Green Speckled 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	500
48	Grout for 2" x 2" Ceramic Floor Tile		Assumed	No	M	
49	Thinset for 2" x 2" Ceramic Floor Tile		Assumed	No	M	
50	Gray Speckled 2" x 2" Ceramic Floor Tile	Restrooms	Assumed	No	M	500
51	Grout for 2" x 2" Ceramic Floor Tile		Assumed	No	M	
52	Thinset for 2" x 2" Ceramic Floor Tile		Assumed	No	M	
53	Fixture Caulking	Restrooms	Assumed	No	M	100
54	Glass Block Mortar	Building Entrances	Assumed	No	M	200
55	Knockdown Drywall	Electrical	Assumed	No	M	2,000
56	Large Pipe Wrap	Above Ceiling	Assumed	No	M	5,000
57	Mastic for Large Pipe Wrap		Assumed	No	M	
58	Small Pipe Wrap	Above Ceiling	Assumed	No	M	4,000
59	Mastic for Pipe Wrap		Assumed	No	M	
60	Black Pipe Foam Insulation	Above Ceiling	Assumed	No	M	1,000
61	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	5,000
62	Silver Duct Wrap	Above Ceiling	Assumed	No	M	4,000
63	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	3,000
64	White Duct Tape	Above Ceiling	Assumed	No	M	500
65	Mastic for Duct Tape	Above Ceiling	Assumed	No	M	
66	Unfinished Drywall	Above Ceiling	Assumed	No	M	20,000
67	Silver Duct Tape	Above Ceiling	Assumed	No	M	100
68	Skylight Insulation Panel	Above Ceiling	Assumed	Yes	M	2,000

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

SECTION 6

♦

PLM BULK
SAMPLE SHEETS

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/4/2025	Site: Kyrene Centennial Middle School - Admin Building

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: - 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)					
AZ1418.11-PLM-1	1	Skip Trowel Drywall System - Peach Paint #1	East - Custodian	Convenient	None Detected
		White Texture #1		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound #1		Convenient	None Detected
		Peach Paint #2		Convenient	None Detected
		White Joint Compound #2		Convenient	None Detected
		Yellow Tape (Mesh)		Convenient	None Detected
		Peach Paint #3		Convenient	None Detected
		White Texture #2		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.11-PLM-2		Skip Trowel Drywall System - Peach Paint #2	East - Custodian	Convenient	None Detected
		White Texture #2		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound #2		Convenient	None Detected
		Peach Paint #3		Convenient	None Detected
		White Joint Compound #3		Convenient	None Detected
		Yellow Tape (Mesh)		Convenient	None Detected
		Peach Paint #4		Convenient	None Detected
		White Texture #3		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.11-PLM-3	1	Skip Trowel Drywall System - Peach Paint #3	East - Custodian	Convenient	None Detected
		White Texture #3		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound #3		Convenient	None Detected
		Peach Paint #4		Convenient	None Detected
		White Joint Compound #4		Convenient	None Detected
		Yellow Tape (Mesh)		Convenient	None Detected
		Peach Paint #5		Convenient	None Detected
		White Texture #4		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/4/2025	Site: Kyrene Centennial Middle School - Admin Building

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.11-PLM-4	2	White w/Gray Specks 12" x 12"' VCT	Northeast - Custodian	Convenient	None Detected
	3	Semi-Transparent Mastic for 12" x 12" VCT		Convenient	None Detected
AZ1418.11-PLM-5	2	White w/Gray Specks 12" x 12"' VCT	Northeast - Custodian	Convenient	None Detected
	3	Semi-Transparent Mastic for 12" x 12" VCT		Convenient	None Detected
AZ1418.11-PLM-6	2	White w/Gray Specks 12" x 12"' VCT	Northeast - Custodian	Convenient	None Detected
	3	Semi-Transparent Mastic for 12" x 12" VCT		Convenient	None Detected
Sample Date: 8/4/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)					
AZ1418.56-PLM-1	4	New 2' x 2' Ceiling Tile	South - Front Office	Random	None Detected
AZ1418.56-PLM-2		New 2' x 2' Ceiling Tile	Northwest - Health Office	Random	None Detected
AZ1418.56-PLM-3		New 2' x 2' Ceiling Tile	East - ISI Room	Random	None Detected
AZ1418.56-PLM-4	5	Old 2' x 2' Ceiling Tile	South- Front Office	Random	None Detected
AZ1418.56-PLM-5		Old 2' x 2' Ceiling Tile	Northwest - Health Office	Random	None Detected
AZ1418.56-PLM-6		Old 2' x 2' Ceiling Tile	East - ISI Room	Random	None Detected
AZ1418.56-PLM-7	6	Gray Multi-Color Carpet Square	Southwest - Front Office	Convenient	None Detected
	7	Tan Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-8	6	Gray Multi-Color Carpet Square	East - ISI Room	Convenient	None Detected
	7	Tan Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-9	6	Gray Multi-Color Carpet Square	West - Office	Convenient	None Detected
	7	Tan Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-10	8	Blue Cove Base	Southeast - Front Office	Convenient	None Detected
	9	Cream Mastic Blue Cove Base		Convenient	None Detected
AZ1418.56-PLM-11	8	Blue Cove Base	West - Office	Convenient	None Detected
	9	Cream Mastic Blue Cove Base		Convenient	None Detected
AZ1418.56-PLM-12	8	Blue Cove Base	North - Office	Convenient	None Detected
	9	Cream Mastic Blue Cove Base		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/4/2025	Site: Kyrene Centennial Middle School - Admin Building

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-13	10	Orange Beige Paint	Southeast - Front Office Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-14		Orange Beige Paint	East - Office Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-15		Orange Beige Paint	West - Mail Office	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/5/2025	Site: Kyrene Centennial Middle School - Building B

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)					
AZ1418.11-PLM-1	1	Tan Ceramic Tile	East - Girls Restroom	Convenient	None Detected
	2	Cream Mastic for Tile		Convenient	None Detected
	3	Gray Grout for Tile		Convenient	None Detected
	4	Gray Mortar for Tile		Convenient	None Detected
AZ1418.11-PLM-2	1	Tan Ceramic Tile	East - Girls Restroom	Convenient	None Detected
	2	Cream Mastic for Tile		Convenient	None Detected
	3	Gray Grout for Tile		Convenient	None Detected
	4	Gray Mortar for Tile		Convenient	None Detected
AZ1418.11-PLM-3	1	Tan Ceramic Tile	North - Boys Restroom	Convenient	None Detected
	2	Cream Mastic for Tile		Convenient	None Detected
	3	Gray Grout for Tile		Convenient	None Detected
	4	Gray Mortar for Tile		Convenient	None Detected
AZ1418.11-PLM-4	5	White Ceramic Tile ND	East - Girls Restroom	Convenient	None Detected
	6	Gray Grout ND		Convenient	None Detected
	7	Tan Mastic		Convenient	None Detected
AZ1418.11-PLM-5	5	White Ceramic Tile ND	North - Boys Restroom	Convenient	None Detected
	6	Gray Grout ND		Convenient	None Detected
	7	Gray Caulk ND		Convenient	None Detected
	8	Tan Mastic		Convenient	None Detected
AZ1418.11-PLM-6	5	White Ceramic Tile ND	East - Boys Restroom	Convenient	None Detected
	6	Gray Grout ND		Convenient	None Detected
	7	Tan Mastic		Convenient	None Detected
Sample Date: 8/5/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)					
AZ1418.56-PLM-1	9	New 2' x 2' Ceiling Tile	East - Room B-2	Convenient	None Detected
AZ1418.56-PLM-2		New 2' x 2' Ceiling Tile	Northwest - Room B-6	Convenient	None Detected
AZ1418.56-PLM-3		New 2' x 2' Ceiling Tile	East - Room B-11	Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/5/2025	Site: Kyrene Centennial Middle School - Building B

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-4	10	Old 2' x 2' Ceiling Tile	Northeast - Room B-9	Convenient	None Detected
AZ1418.56-PLM-5		Old 2' x 2' Ceiling Tile	East - Room B-13	Convenient	None Detected
AZ1418.56-PLM-6		Old 2' x 2' Ceiling Tile	Northwest - B-3	Convenient	None Detected
AZ1418.56-PLM-7	11	Gray Multi-Color Carpet Square	West - Room B-1	Convenient	None Detected
	12	Yellow Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-8	11	Gray Multi-Color Carpet Square	Northeast - B-9	Convenient	None Detected
	12	Yellow Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-9	11	Gray Multi-Color Carpet Square	East - B-12	Convenient	None Detected
	12	Yellow Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-10	13	Blue Cove Base	West - B-10	Convenient	None Detected
	14	Yellow Mastic for Cove Base		Convenient	None Detected
AZ1418.56-PLM-11	13	Blue Cove Base	North - Room B-5	Convenient	None Detected
	14	Yellow Mastic for Cove Base		Convenient	None Detected
AZ1418.56-PLM-12	13	Blue Cove Base	East - Room B-4	Convenient	None Detected
	14	Yellow Mastic for Cove Base		Convenient	None Detected
AZ1418.56-PLM-13	15	Orange Peel Drywall System - Off-White Paint	East - Workroom	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-14		Orange Peel Drywall System - Off-White Paint	West - Workroom	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-15		Orange Peel Drywall System - Off-White Paint	Northeast - Room B-7	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/5/2025	Site: Kyrene Centennial Middle School - Building C

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)					
AZ1418.11-PLM-1	1	White Ceramic Tile	East - Boys Restroom	Convenient	None Detected
	2	Gray Grout for Tile		Convenient	None Detected
	3	Tan Mastic for Tile		Convenient	None Detected
AZ1418.11-PLM-2	1	White Ceramic Tile	East - Boys Restroom	Convenient	None Detected
	2	Gray Grout for Tile		Convenient	None Detected
	3	Tan Mastic for Tile		Convenient	None Detected
AZ1418.11-PLM-3	1	White Ceramic Tile	Southeast - Girls Restroom	Convenient	None Detected
	2	Gray Grout for Tile		Convenient	None Detected
	3	Tan Mastic for Tile		Convenient	None Detected
Sample Date: 8/5/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)					
AZ1418.56-PLM-1	4	New 2' x 2' Ceiling Tile	West - Room C-1	Random	None Detected
AZ1418.56-PLM-2		New 2' x 2' Ceiling Tile	West - Conference Room	Random	None Detected
AZ1418.56-PLM-3		New 2' x 2' Ceiling Tile	East - Room C-10	Random	None Detected
AZ1418.56-PLM-4	5	Old 2' x 2' Ceiling Tile	East - Room C-11	Random	None Detected
AZ1418.56-PLM-5		Old 2' x 2' Ceiling Tile	Northeast - Room C-8	Random	None Detected
AZ1418.56-PLM-6		Old 2' x 2' Ceiling Tile	North - South C-5	Random	None Detected
AZ1418.56-PLM-7	6	Gray Multi-Color Carpet Square	West - Conference Room	Convenient	None Detected
	7	Tan Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-8	6	Gray Multi-Color Carpet Square	Northwest - C-2	Convenient	None Detected
	7	Tan Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-9	6	Gray Multi-Color Carpet Square	Southeast - C-4	Convenient	None Detected
	7	Tan Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-10	8	Blue Cove Base	Southwest - C-5	Convenient	None Detected
	9	Cream Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.56-PLM-11	8	Blue Cove Base	Southeast - Room C-11	Convenient	None Detected
	9	Cream Mastic for Blue Cove Base		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/5/2025	Site: Kyrene Centennial Middle School - Building C

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-12	8	Blue Cove Base	East - Room C-9	Convenient	None Detected
	9	Cream Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.56-PLM-13	10	Orange Peel Drywall - Cream Paint	West - Room C-4 Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Cream Tape 2		Convenient	None Detected
		White Joint Compound 2		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-14		Orange Peel Drywall - Cream Paint	South - Room C-8 Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Cream Tape 3		Convenient	None Detected
		White Joint Compound 3		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-15		Orange Peel Drywall - Cream Paint	East - Room C-10 Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Cream Tape 4		Convenient	None Detected
		White Joint Compound 4		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 7/11/22 + 3/12/24 + 8/5/25	Site: Kyrene Centennial Middle School - Building D

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 7/11/2022 - AHERA Building Inspector: Nick Marcos (ON-4644-8873-032422)					
AZ0959.3105-PLM-1	1	Orange Peel Drywall - Off-White Paint #1	West - Faculty Restroom	Convenient	None Detected
		White Texture #1		Convenient	None Detected
		Off-White Paint #2		Convenient	None Detected
		White Texture #2		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Brown Drywall with Brown/Green Paper		Convenient	None Detected
AZ0959.3105-PLM-2		Orange Peel Drywall - Off-White Paint #2	Northwest - Faculty Restroom	Convenient	None Detected
		White Texture #2		Convenient	None Detected
		Off-White Paint #3		Convenient	None Detected
		White Texture #3		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Brown Drywall with Brown/Green Paper		Convenient	None Detected
AZ0959.3105-PLM-3		Orange Peel Drywall - Off-White Paint #3	West - Faculty Restroom	Convenient	None Detected
		White Texture #3		Convenient	None Detected
		Off-White Paint #4		Convenient	None Detected
		White Texture #4		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Brown Drywall with Brown/Green Paper		Convenient	None Detected
AZ0959.3105-PLM-4	2	Brown Cove Base	West - Faculty Restroom	Convenient	None Detected
	3	Yellow Mastic for Brown Cove Base		Convenient	None Detected
AZ0959.3105-PLM-5	2	Brown Cove Base	Northwest - Faculty Restroom	Convenient	None Detected
	3	Yellow Mastic for Brown Cove Base		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 7/11/22 + 3/12/24 + 8/5/25	Site: Kyrene Centennial Middle School - Building D

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ0959.3105-PLM-6	2	Brown Cove Base	Northwest - Faculty Restroom	Convenient	None Detected
	3	Yellow Mastic for Brown Cove Base		Convenient	None Detected
AZ0959.3105-PLM-7	4	Blue Cove Base	South - Faculty Restroom	Convenient	None Detected
	5	Yellow Mastic for Blue Cove Base		Convenient	None Detected
AZ0959.3105-PLM-8	4	Blue Cove Base	South - Faculty Restroom	Convenient	None Detected
	5	Yellow Mastic for Blue Cove Base		Convenient	None Detected
AZ0959.3105-PLM-9	4	Blue Cove Base	South - Faculty Restroom	Convenient	None Detected
	5	Yellow Mastic for Blue Cove Base		Convenient	None Detected
AZ0959.3105-PLM-10	6	Counter Caulking	Southwest - Faculty Restroom	Convenient	None Detected
AZ0959.3105-PLM-11		Counter Caulking	Southwest - Faculty Restroom	Convenient	None Detected
AZ0959.3105-PLM-12		Counter Caulking	Southwest - Faculty Restroom	Convenient	None Detected
AZ0959.3105-PLM-13	7	Fixture Caulking	West - Faculty Restroom	Convenient	None Detected
AZ0959.3105-PLM-14		Fixture Caulking	West - Faculty Restroom	Convenient	None Detected
AZ0959.3105-PLM-15		Fixture Caulking	West - Faculty Restroom	Convenient	None Detected
Sample Date: 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)					
AZ1418.11-PLM-1	8	White Ceramic Tile	Northeast - Girls Restroom	Convenient	None Detected
	9	Gray Grout for Tile		Convenient	None Detected
	10	Tan Mastic for Tile		Convenient	None Detected
AZ1418.11-PLM-2	8	White Ceramic Tile	Northeast - Girls Restroom	Convenient	None Detected
	9	Gray Grout for Tile		Convenient	None Detected
	10	Tan Mastic for Tile		Convenient	None Detected
AZ1418.11-PLM-3	8	White Ceramic Tile	West - Girls Restroom	Convenient	None Detected
	9	Gray Grout for Tile		Convenient	None Detected
	10	Tan Mastic for Tile		Convenient	None Detected
AZ1418.11-PLM-4	11	2" x 2" Tan Floor Tiles	Southeast - Boys Restroom	Convenient	None Detected
	12	Gray Grout for Tile		Convenient	None Detected
	13	Yellow Mastic for Tile		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 7/11/22 + 3/12/24 + 8/5/25	Site: Kyrene Centennial Middle School - Building D

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.11-PLM-5	11	2" x 2" Tan Floor Tiles	West - Boys Restroom	Convenient	None Detected
	12	Gray Grout for Tile		Convenient	None Detected
	13	Yellow Mastic for Tile		Convenient	None Detected
AZ1418.11-PLM-6	11	2" x 2" Tan Floor Tiles	West - Boys Restroom	Convenient	None Detected
	12	Gray Grout for Tile		Convenient	None Detected
	13	Yellow Mastic for Tile		Convenient	None Detected
AZ1418.11-PLM-7	14	2" x 2" Pink Floor Tile	Southeast - Boys Restroom	Convenient	None Detected
	15	Gray Grout for Tile		Convenient	None Detected
	16	Beige Thinset for Tile		Convenient	None Detected
AZ1418.11-PLM-8	14	2" x 2" Pink Floor Tile	West - Boys Restroom	Convenient	None Detected
	15	Gray Grout for Tile		Convenient	None Detected
	16	Beige Thinset for Tile		Convenient	None Detected
AZ1418.11-PLM-9	14	2" x 2" Pink Floor Tile	West - Boys Restroom	Convenient	None Detected
	15	Gray Grout for Tile		Convenient	None Detected
	16	Beige Thinset for Tile		Convenient	None Detected
AZ1418.11-PLM-10	17	2" x 2" Green Floor Tile	West - Boys Restroom	Convenient	None Detected
	18	Gray Grout for Tile		Convenient	None Detected
	19	Beige Thinset for Tile		Convenient	None Detected
AZ1418.11-PLM-11	17	2" x 2" Green Floor Tile	Southeast - Boys Restroom	Convenient	None Detected
	18	Gray Grout for Tile		Convenient	None Detected
	19	Beige Thinset for Tile		Convenient	None Detected
AZ1418.11-PLM-12	17	2" x 2" Green Floor Tile	West - Boys Restroom	Convenient	None Detected
	18	Gray Grout for Tile		Convenient	None Detected
	19	Beige Thinset for Tile		Convenient	None Detected
Sample Date: 8/5/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)					
AZ1418.56-PLM-1	20	New 2' x 2' Ceiling Tile	East - Room D-1	Random	None Detected
AZ1418.56-PLM-2		New 2' x 2' Ceiling Tile	East - Room D-5	Random	None Detected
AZ1418.56-PLM-3		New 2' x 2' Ceiling Tile	East - Room D-8	Random	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 7/11/22 + 3/12/24 + 8/5/25	Site: Kyrene Centennial Middle School - Building D

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-4	21	Old 2' x 2' Ceiling Tile	East - Room D-11	Random	None Detected
AZ1418.56-PLM-5		Old 2' x 2' Ceiling Tile	East - Room D-4	Random	None Detected
AZ1418.56-PLM-6		Old 2' x 2' Ceiling Tile	East - Room D-2	Random	None Detected
AZ1418.56-PLM-7	22	Gray Multicolored Carpet Square	West - Teachers Lounge	Convenient	None Detected
	23	Multicolored Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-8	22	Gray Multicolored Carpet Square	East - Room D-12	Convenient	None Detected
	23	Multicolored Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-9	22	Gray Multicolored Carpet Square	North - Room D-9	Convenient	None Detected
	23	Multicolored Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-10	24	Blue Cove Base	Southeast - Room D-10	Convenient	None Detected
	25	Cream Mastic for Cove Base		Convenient	None Detected
AZ1418.56-PLM-11	24	Blue Cove Base	Southeast - Room D-5	Convenient	None Detected
	25	Cream Mastic for Cove Base		Convenient	None Detected
AZ1418.56-PLM-12	24	Blue Cove Base	Southwest - Room D-3	Convenient	None Detected
	25	Cream Mastic for Cove Base		Convenient	None Detected
AZ1418.56-PLM-13	26	Orange Peel Drywall - Off-White Paint	Southeast - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-14		Orange Peel Drywall - Off-White Paint	Southwest - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-15		Orange Peel Drywall - Off-White Paint	West - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025 + 8/28/2025	Site: Kyrene Centennial Middle School - Building E

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 9/29/2021 - AHERA Building Inspector: Garth Backman (ON-4644-12304-071621)					
AZ0959.2917-PLM-1	1	Drywall - Beige Paint	Northwest - Kitchen	Convenient	None Detected
		White Texture		Convenient	None Detected
		Off-White Paint		Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ0959.2917-PLM-2		Drywall - Beige Paint	Northwest - Kitchen	Convenient	None Detected
		White Texture		Convenient	None Detected
		Off-White Paint		Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ0959.2917-PLM-3		Drywall - Beige Paint	West - Kitchen	Convenient	None Detected
		White Texture		Convenient	None Detected
		Off-White Paint		Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
Sample Date: 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)					
AZ1418.11-PLM-1	2	Red 12" x 12" VCT	East - Service Line Area	Convenient	None Detected
	3	Mastic for Red 12" x 12" VCT		Convenient	None Detected
AZ1418.11-PLM-2	2	Red 12" x 12" VCT	East - Service Line Area	Convenient	None Detected
	3	Mastic for Red 12" x 12" VCT		Convenient	None Detected
AZ1418.11-PLM-3	2	Red 12" x 12" VCT	East - Service Line Area	Convenient	None Detected
	3	Mastic for Red 12" x 12" VCT		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025 + 8/28/2025	Site: Kyrene Centennial Middle School - Building E

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.11-PLM-4	4	Brown Stair Tread	West - Stage	Convenient	None Detected
	5	Cream Mastic for Brown Stair Tread		Convenient	None Detected
AZ1418.11-PLM-5	4	Brown Stair Tread	West - Stage	Convenient	None Detected
	5	Cream Mastic for Brown Stair Tread		Convenient	None Detected
AZ1418.11-PLM-6	4	Brown Stair Tread	West - Stage	Convenient	None Detected
	5	Cream Mastic for Brown Stair Tread		Convenient	None Detected
AZ1418.11-PLM-7	6	White RR Wall Tiles	Southwest - Boys Restroom	Convenient	None Detected
	7	Grout for White RR Wall Tiles		Convenient	None Detected
AZ1418.11-PLM-8	6	White RR Wall Tiles	West - Restroom	Convenient	None Detected
	7	Grout for White RR Wall Tiles		Convenient	None Detected
AZ1418.11-PLM-9	6	White RR Wall Tiles	West - Restroom	Convenient	None Detected
	7	Grout for White RR Wall Tiles		Convenient	None Detected
AZ1418.11-PLM-10	8	White 2" x 2" Floor Tiles	West - Restroom	Convenient	None Detected
	9	Dark Gray Grout for Tile		Convenient	None Detected
	10	Dark Gray Thinset for Tile		Convenient	None Detected
AZ1418.11-PLM-11	8	White 2" x 2" Floor Tiles	Southwest - Boys Restroom	Convenient	None Detected
	9	Dark Gray Grout for Tile		Convenient	None Detected
	10	Dark Gray Thinset for Tile		Convenient	None Detected
AZ1418.11-PLM-12	8	White 2" x 2" Floor Tiles	Southwest - Boys Restroom	Convenient	None Detected
	9	Dark Gray Grout for Tile		Convenient	None Detected
	10	Dark Gray Thinset for Tile		Convenient	None Detected
Sample Date: 8/6/2025 & 8/22/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)					
AZ1418.56-PLM-1	11	New 2" x 2" Ceiling Tile	South - Band Room	Random	None Detected
AZ1418.56-PLM-2		New 2" x 2" Ceiling Tile	Southwest - Storage	Random	None Detected
AZ1418.56-PLM-3		New 2" x 2" Ceiling Tile	Southeast - Cafeteria	Random	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025 + 8/28/2025	Site: Kyrene Centennial Middle School - Building E

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-4	12	Old 2" x 2" Ceiling Tile	Northeast - Cafeteria	Random	None Detected
AZ1418.56-PLM-5		Old 2" x 2" Ceiling Tile	North - Band Room	Random	None Detected
AZ1418.56-PLM-6		Old 2" x 2" Ceiling Tile	Southwest - Cafeteria	Random	None Detected
AZ1418.56-PLM-7	13	Peach Soundboard Wrap	Northwest - Band Room	Convenient	None Detected
	14	Yellow Adhesive for Wrap		Convenient	None Detected
AZ1418.56-PLM-8	13	Peach Soundboard Wrap	Northeast - Band Room	Convenient	None Detected
	14	Yellow Adhesive for Wrap		Convenient	None Detected
AZ1418.56-PLM-9	13	Peach Soundboard Wrap	South - Band Room	Convenient	None Detected
	14	Yellow Adhesive for Wrap		Convenient	None Detected
AZ1418.56-PLM-10	15	Gray Multicolored Carpet Square	Northwest - Storage	Convenient	None Detected
	16	Multicolored Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-11	15	Gray Multicolored Carpet Square	Southwest - Stage Storage	Convenient	None Detected
	16	Multicolored Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-12	15	Gray Multicolored Carpet Square	East - Kitchen Storage	Convenient	None Detected
	16	Multicolored Mastic for Carpet Square		Convenient	None Detected
AZ1418.56-PLM-13	17	Orange Peel Drywall - Off-White Paint	West - Boys Locker	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-14		Orange Peel Drywall - Off-White Paint	Northeast - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Yellow Paint		Convenient	None Detected
		White Texture 2		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 9/21/2021 + 3/12/2024 + 8/6/2025 + 8/28/2025	Site: Kyrene Centennial Middle School - Building E

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-15	17	Orange Peel Drywall - Off-White Paint	Southwest - Weight Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Off-White Paint 2		Convenient	None Detected
		White Texture 2		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-16	18	2' x 4' Ceiling Tile	Southeast - Apartment Unit	Convenient	None Detected
AZ1418.56-PLM-17		2' x 4' Ceiling Tile	West - Apartment Unit	Convenient	None Detected
AZ1418.56-PLM-18		2' x 4' Ceiling Tile	North - Apartment Unit	Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 8/4/2025	Site: Kyrene Centennial Middle School - Building F

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 8/4/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)					
AZ1418.56-PLM-1	1	New 2' x 2' Ceiling Tile	South - Chorus Room	Random	None Detected
AZ1418.56-PLM-2		New 2' x 2' Ceiling Tile	West - Room F-3	Random	None Detected
AZ1418.56-PLM-3		New 2' x 2' Ceiling Tile	Northwest - Room F-6	Random	None Detected
AZ1418.56-PLM-4	2	Old 2' x 2' Ceiling Tile	Southeast - Room F-5	Random	None Detected
AZ1418.56-PLM-5		Old 2' x 2' Ceiling Tile	East - Room F-4	Random	None Detected
AZ1418.56-PLM-6		Old 2' x 2' Ceiling Tile	East - Room F-1	Random	None Detected
AZ1418.56-PLM-7	3	Lightly Textured 2' x 2' Ceiling Tile	East - Room F-2	Random	None Detected
AZ1418.56-PLM-8		Lightly Textured 2' x 2' Ceiling Tile	East - Room F-2	Random	None Detected
AZ1418.56-PLM-9		Lightly Textured 2' x 2' Ceiling Tile	East - Room F-2	Random	None Detected
AZ1418.56-PLM-10	4	Gray Multicolor Carpet Square	Southwest - Room F-1	Convenient	None Detected
	5	Mastic for Gray Multicolor Carpet Square		Convenient	None Detected
AZ1418.56-PLM-11	4	Gray Multicolor Carpet Square	Northwest - Room F-4	Convenient	None Detected
	5	Mastic for Gray Multicolor Carpet Square		Convenient	None Detected
AZ1418.56-PLM-12	4	Gray Multicolor Carpet Square	North - Room F-6	Convenient	None Detected
	5	Mastic for Gray Multicolor Carpet Square		Convenient	None Detected
AZ1418.56-PLM-13	6	Orange Peel Drywall - White Paint	Southeast - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-14		Orange Peel Drywall - White Paint	East - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 8/4/2025	Site: Kyrene Centennial Middle School - Building F

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-15	6	Orange Peel Drywall - White Paint	East - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 8/4/2025	Site: Kyrene Centennial Middle School - Building G

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 8/4/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)					
AZ1418.56-PLM-1	1	Lightly Textured 2' x 2' Ceiling Tile	West - Media Center	Random	None Detected
AZ1418.56-PLM-2		Lightly Textured 2' x 2' Ceiling Tile	South - Media Center	Random	None Detected
AZ1418.56-PLM-3		Lightly Textured 2' x 2' Ceiling Tile	East - Media Center	Random	None Detected
AZ1418.56-PLM-4	2	New 2' x 2' Ceiling Tile	Southwest - Room G-6	Random	None Detected
AZ1418.56-PLM-5		New 2' x 2' Ceiling Tile	West - Room G-5	Random	None Detected
AZ1418.56-PLM-6		New 2' x 2' Ceiling Tile	North - Room G-2	Random	None Detected
AZ1418.56-PLM-7	3	Old 2' x 2' Ceiling Tile	South - Room G-4	Random	None Detected
AZ1418.56-PLM-8		Old 2' x 2' Ceiling Tile	South - Room G-2	Random	None Detected
AZ1418.56-PLM-9		Old 2' x 2' Ceiling Tile	North - Storage	Random	None Detected
AZ1418.56-PLM-10	4	Gray Multi-Color Carpet Square	Southeast - Media Center	Convenient	None Detected
	5	Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-11	4	Gray Multi-Color Carpet Square	Northeast - Storage	Convenient	None Detected
	5	Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-12	4	Gray Multi-Color Carpet Square	Southeast - Room G-4	Convenient	None Detected
	5	Mastic for Gray Multi-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-13	6	Orange Peel Drywall - Off-White Paint	East - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-14		Orange Peel Drywall - Off-White Paint	East - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 8/4/2025	Site: Kyrene Centennial Middle School - Building G

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-15	6	Orange Peel Drywall - Off-White Paint	Northeast - Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/6/2025	Site: Kyrene Centennial Middle School - Building H

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 3/12/2024 - AHERA Building Inspector: Tracey Carpenter (4612-14588-071423)					
AZ1418.11-PLM-1	1	Orange Peel Drywall - Multicolored Paint Layers	North - Room H-11	Convenient	None Detected
		White Texture		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.11-PLM-2		Orange Peel Drywall - Multicolored Paint Layers	South - Room H-11	Convenient	None Detected
		White Texture		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.11-PLM-3		Orange Peel Drywall - Multicolored Paint Layers	West - Room H-11	Convenient	None Detected
		White Texture		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.11-PLM-3	2	Tac Board	Northeast - Room H-9	Convenient	None Detected
AZ1418.11-PLM-4		Tac Board	Northeast - Room H-9	Convenient	None Detected
AZ1418.11-PLM-5		Tac Board	Northeast - Room H-9	Convenient	None Detected
AZ1418.11-PLM-6	3	White 12" x 12" VCT	Northeast - Storage	Convenient	None Detected
	4	Transparent Mastic for White 12" x 12" VCT		Convenient	None Detected
AZ1418.11-PLM-7	3	White 12" x 12" VCT	Northeast - Storage	Convenient	None Detected
	4	Transparent Mastic for White 12" x 12" VCT		Convenient	None Detected
AZ1418.11-PLM-8	3	White 12" x 12" VCT	North - Storage	Convenient	None Detected
	4	Transparent Mastic for White 12" x 12" VCT		Convenient	None Detected
Sample Date: 8/6/2025 - AHERA Building Inspector: Nick Marcos (ON-188748-8873-031325)					
AZ1418.56-PLM-1	5	New 2' x 2' Ceiling Tile	Southwest - Room H-11	Random	None Detected
AZ1418.56-PLM-2		New 2' x 2' Ceiling Tile	East - Room H-6	Random	None Detected
AZ1418.56-PLM-3		New 2' x 2' Ceiling Tile	North - Room H-16	Random	None Detected
AZ1418.56-PLM-4	6	Old 2' x 2' Ceiling Tile	West - H-11	Random	None Detected
AZ1418.56-PLM-5		Old 2' x 2' Ceiling Tile	Northeast -Room H-10	Random	None Detected
AZ1418.56-PLM-6		Old 2' x 2' Ceiling Tile	Southeast - H-8	Random	None Detected

Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.56	Client: Kyrene Elementary School District No. 28
Sample Date(s): 3/12/2024 + 8/6/2025	Site: Kyrene Centennial Middle School - Building H

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.56-PLM-7	7	Gray Muli-Color Carpet Square	Northeast - H-3	Convenient	None Detected
	8	Mastic for Gray Muli-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-8	7	Gray Muli-Color Carpet Square	North - Room H-1	Convenient	None Detected
	8	Mastic for Gray Muli-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-9	7	Gray Muli-Color Carpet Square	Northeast - Room H-13	Convenient	None Detected
	8	Mastic for Gray Muli-Color Carpet Square		Convenient	None Detected
AZ1418.56-PLM-10	9	Blue Cove Base	Northwest - Room H-11	Convenient	None Detected
	10	Cream Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.56-PLM-11	9	Blue Cove Base	Northeast - Room H-17	Convenient	None Detected
	10	Cream Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.56-PLM-12	9	Blue Cove Base	North - Room H-5	Convenient	None Detected
	10	Cream Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.56-PLM-13	11	Orange Peel Drywall - White Paint	Northwest - Office	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-14		Orange Peel Drywall - White Paint	West - H-1 Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.56-PLM-15		Orange Peel Drywall - White Paint	West - H-1 Storage	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected


Inspector: Nick Marcos
Certificate Number: ON-188748-8873-031325
State: Arizona

DOMINION

SECTION 7

♦

PLM BULK SAMPLE LOCATION MAPS

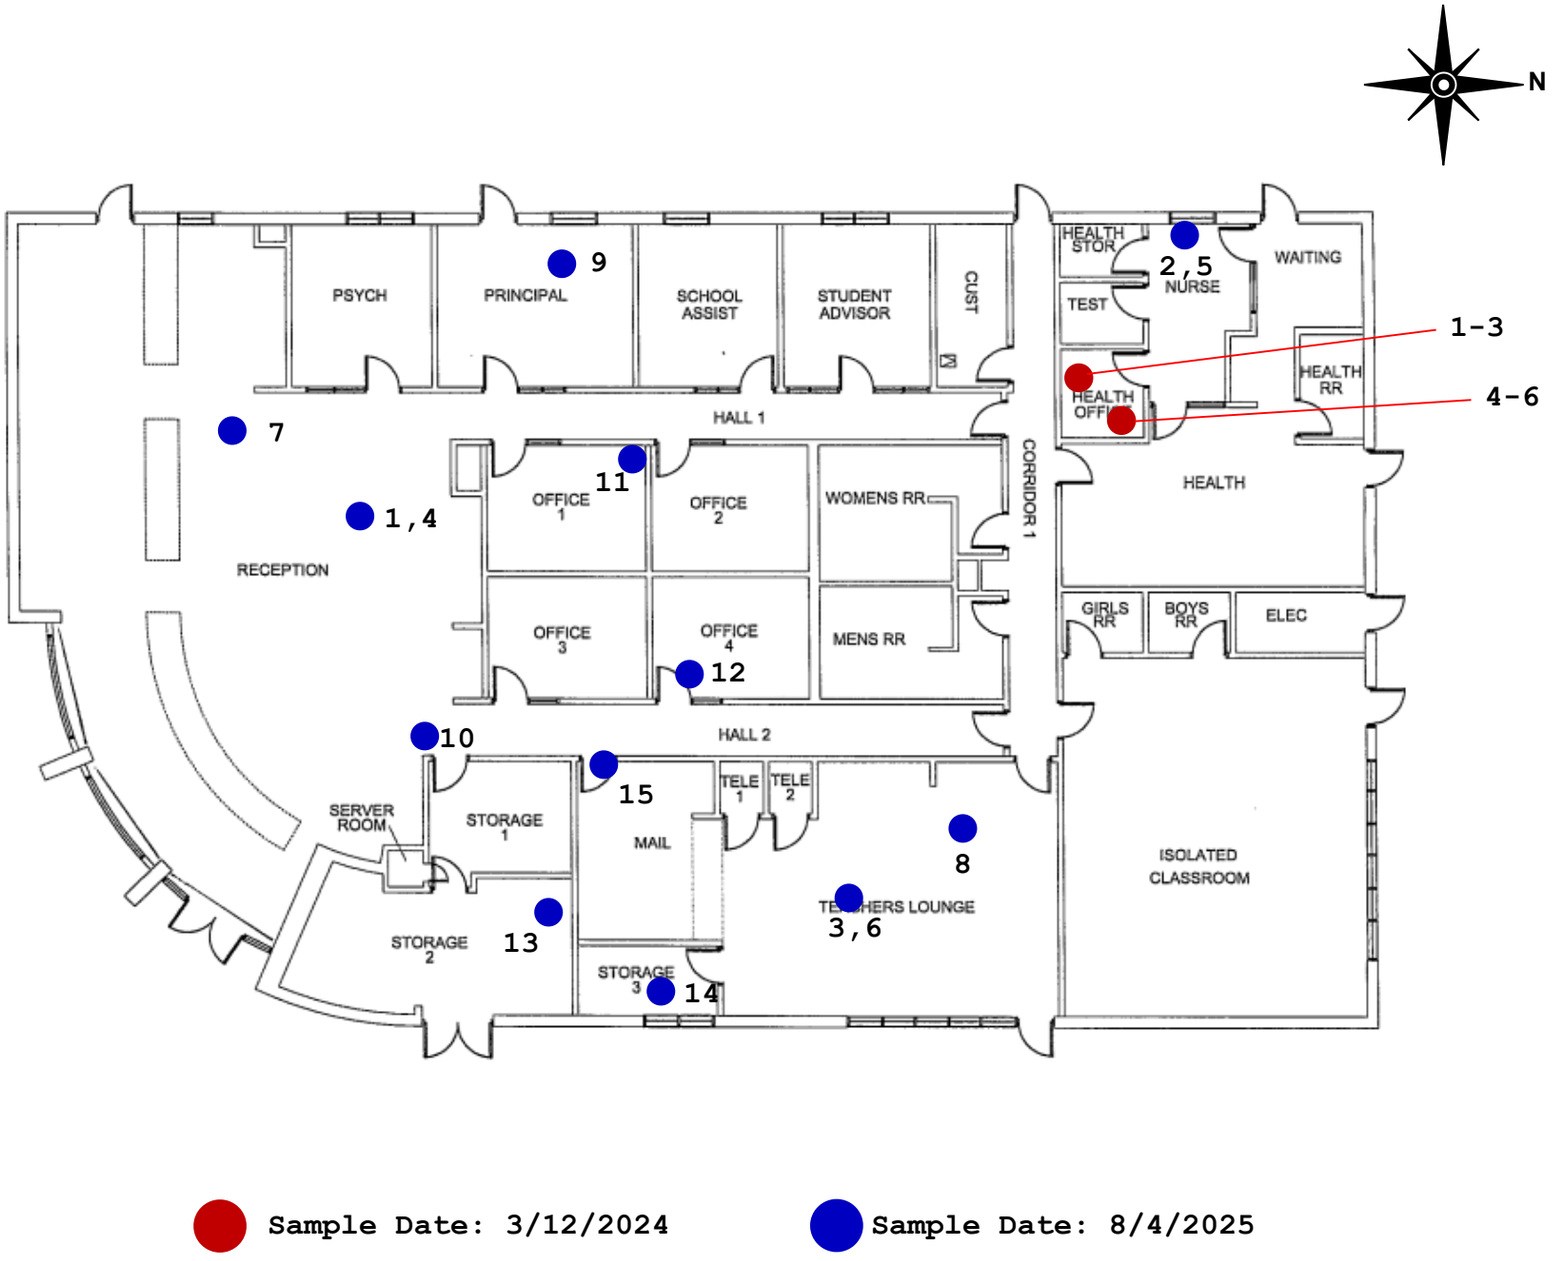


PLM Sample Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Admin Building

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

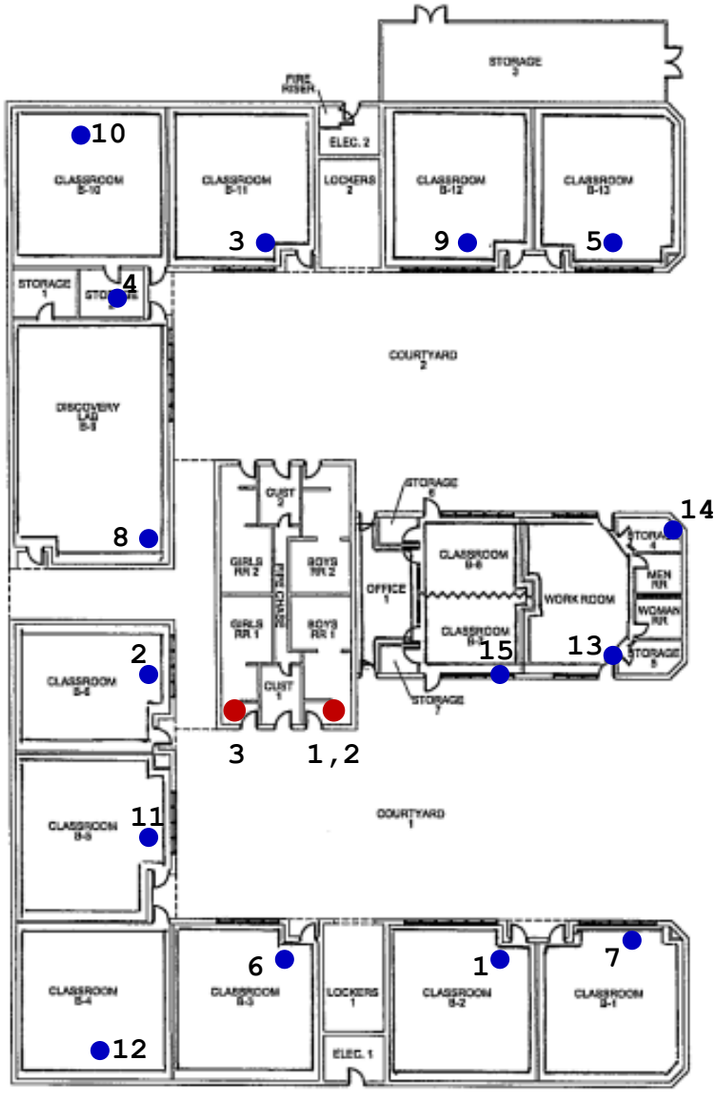


Sample Date: 3/12/2024 **Sample Date: 8/5/2025**

PLM Sample Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building B

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

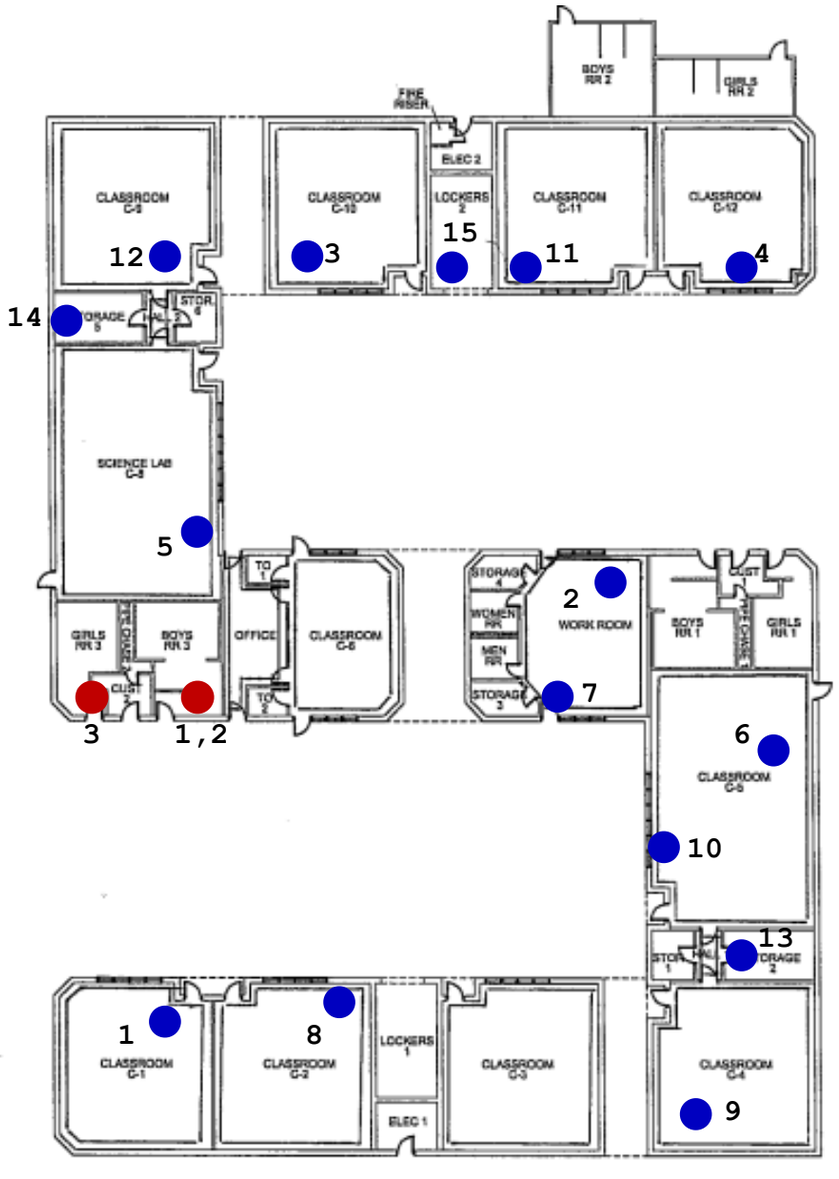


PLM Sample Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building C

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

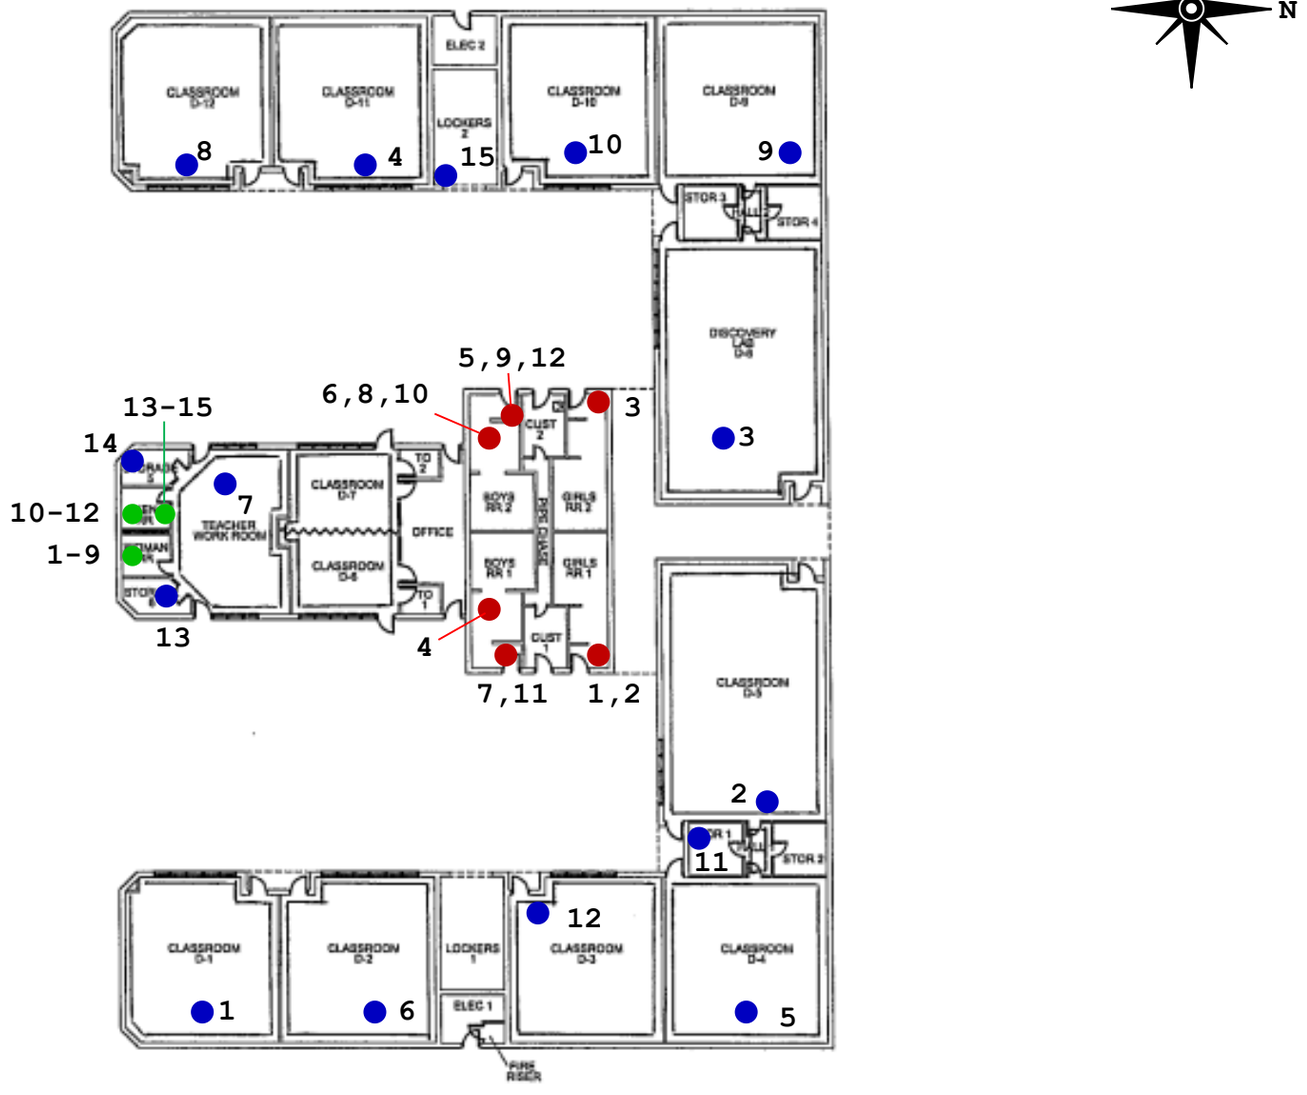


Sample Date: 7/11/22 **Sample Date: 3/12/24** **Sample Date: 8/5/25**

PLM Sample Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building D

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

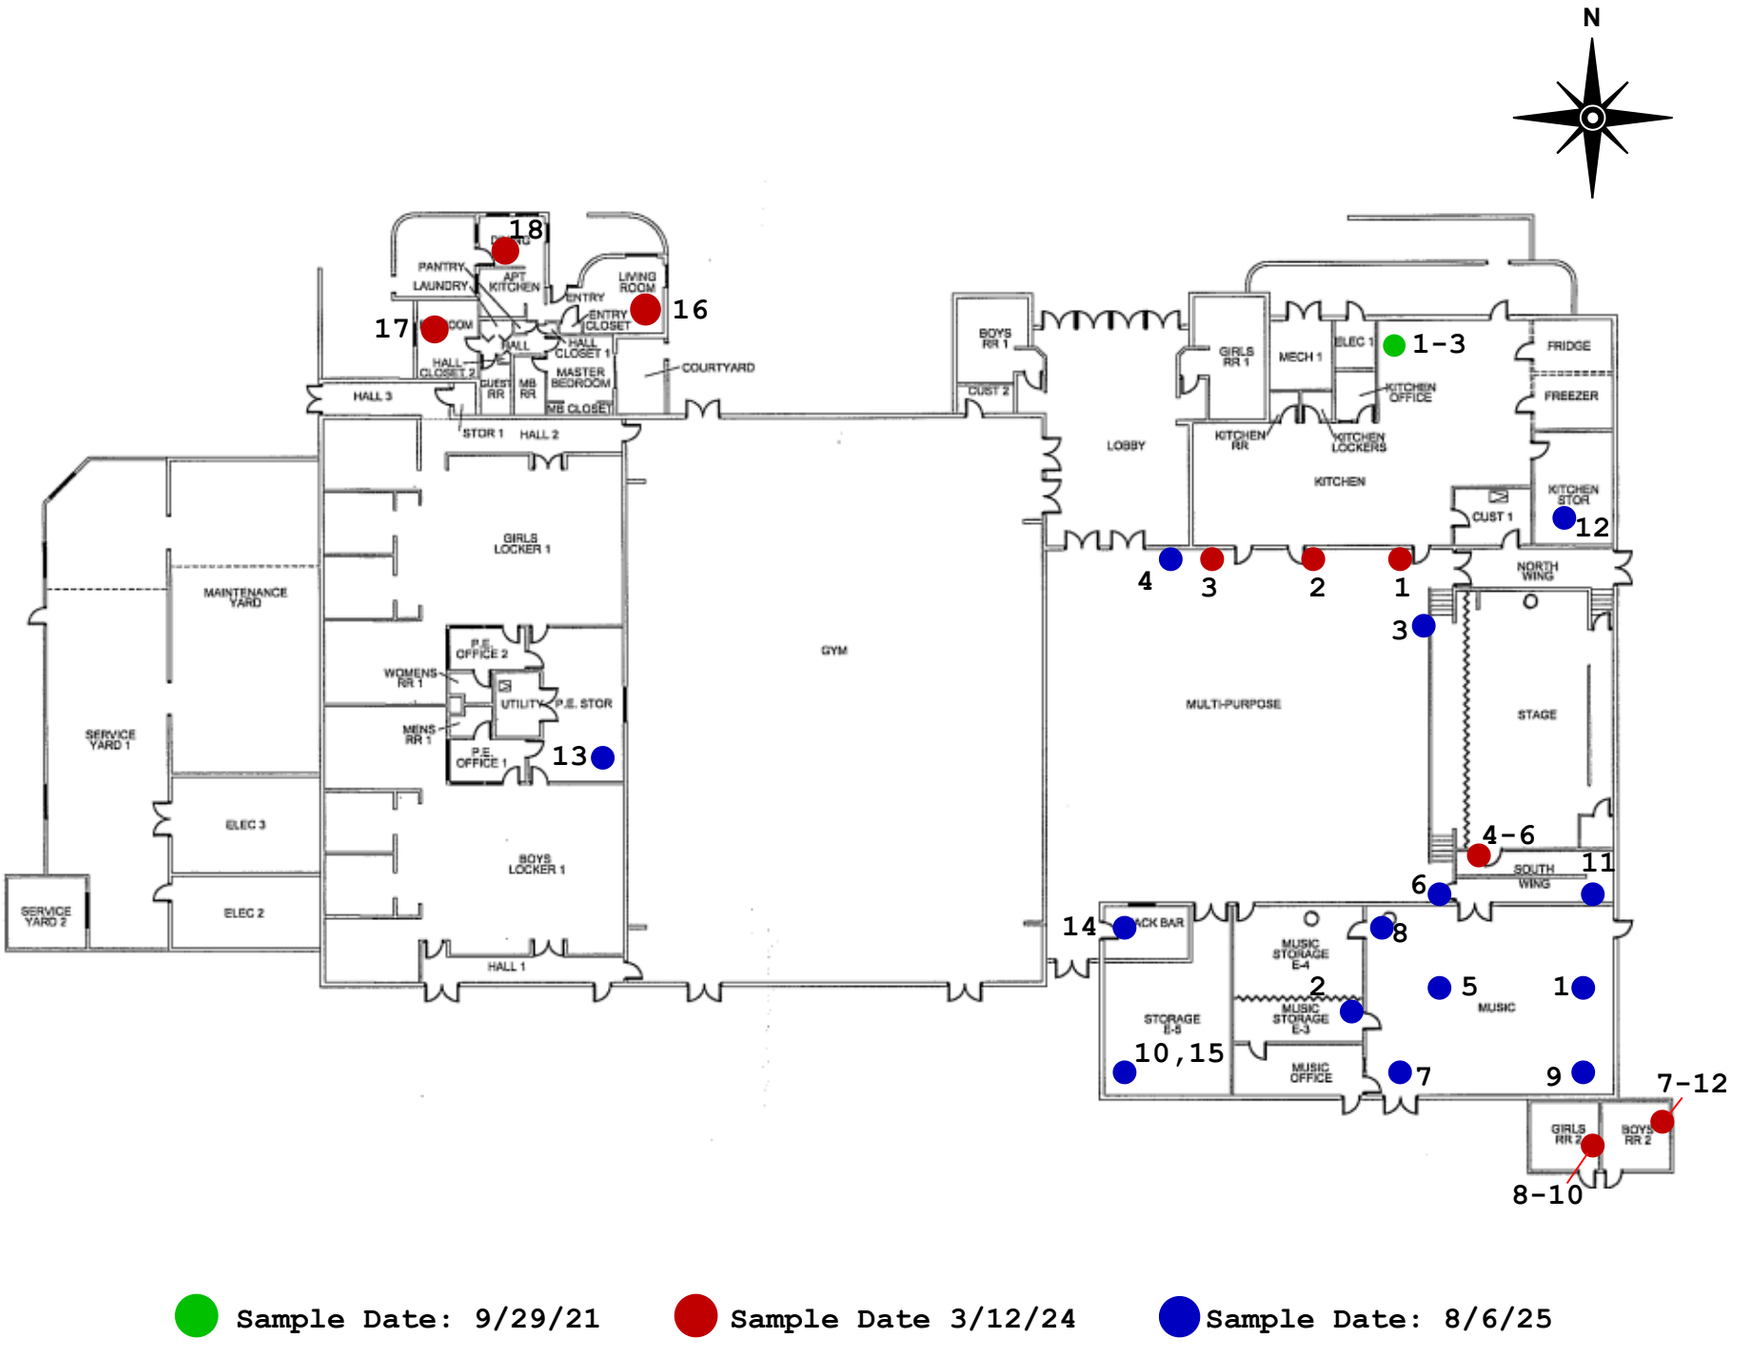


Sample Date: 9/29/21 **Sample Date 3/12/24** **Sample Date: 8/6/25**

PLM Sample Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building E

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

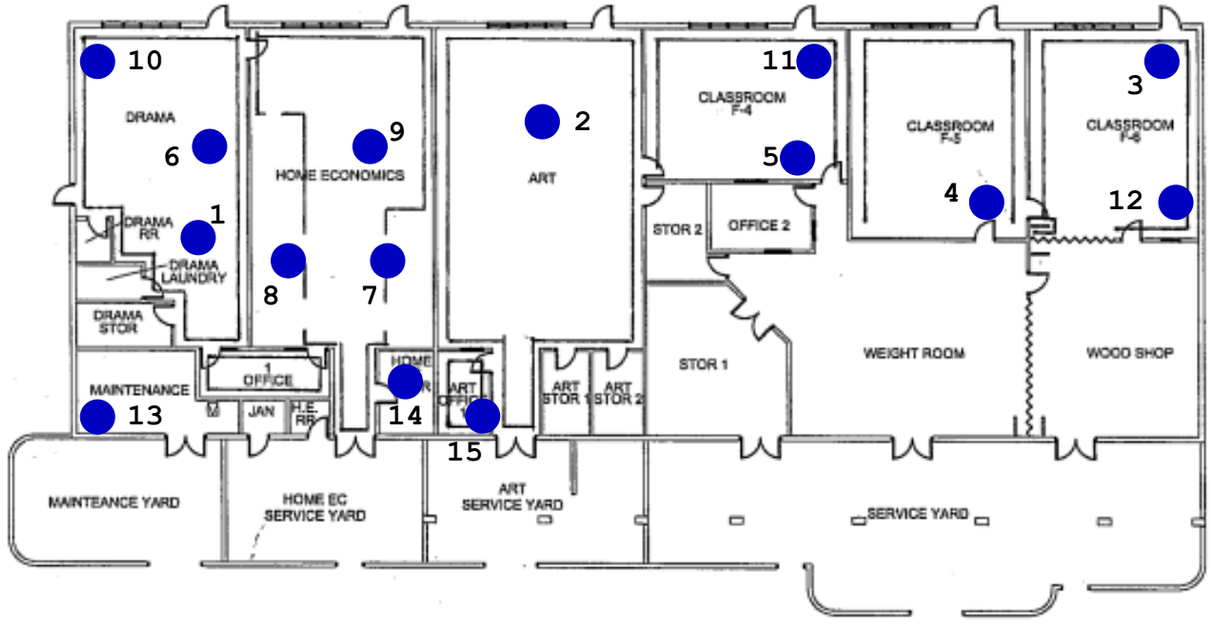


Sample Date: 8/4/2025

PLM Sample Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building F

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

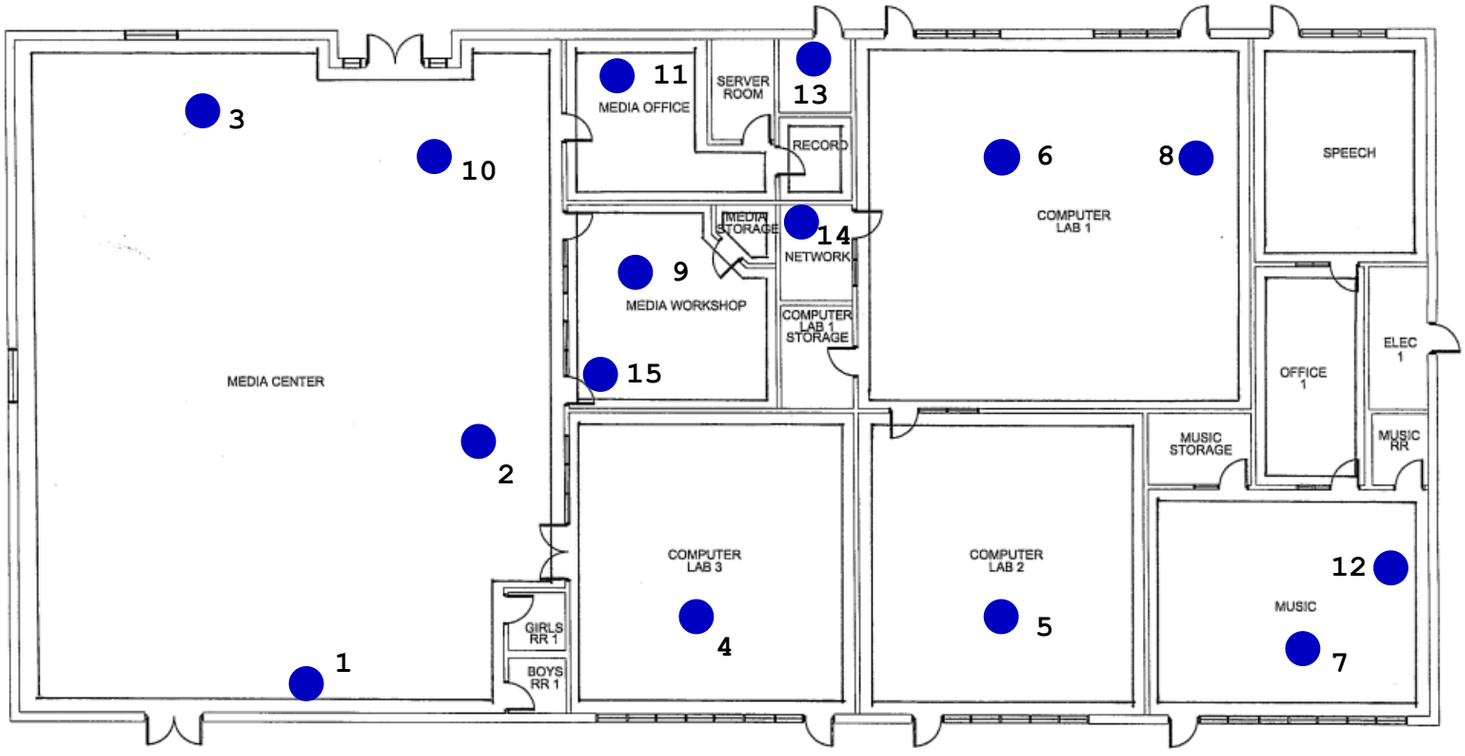


Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building G

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

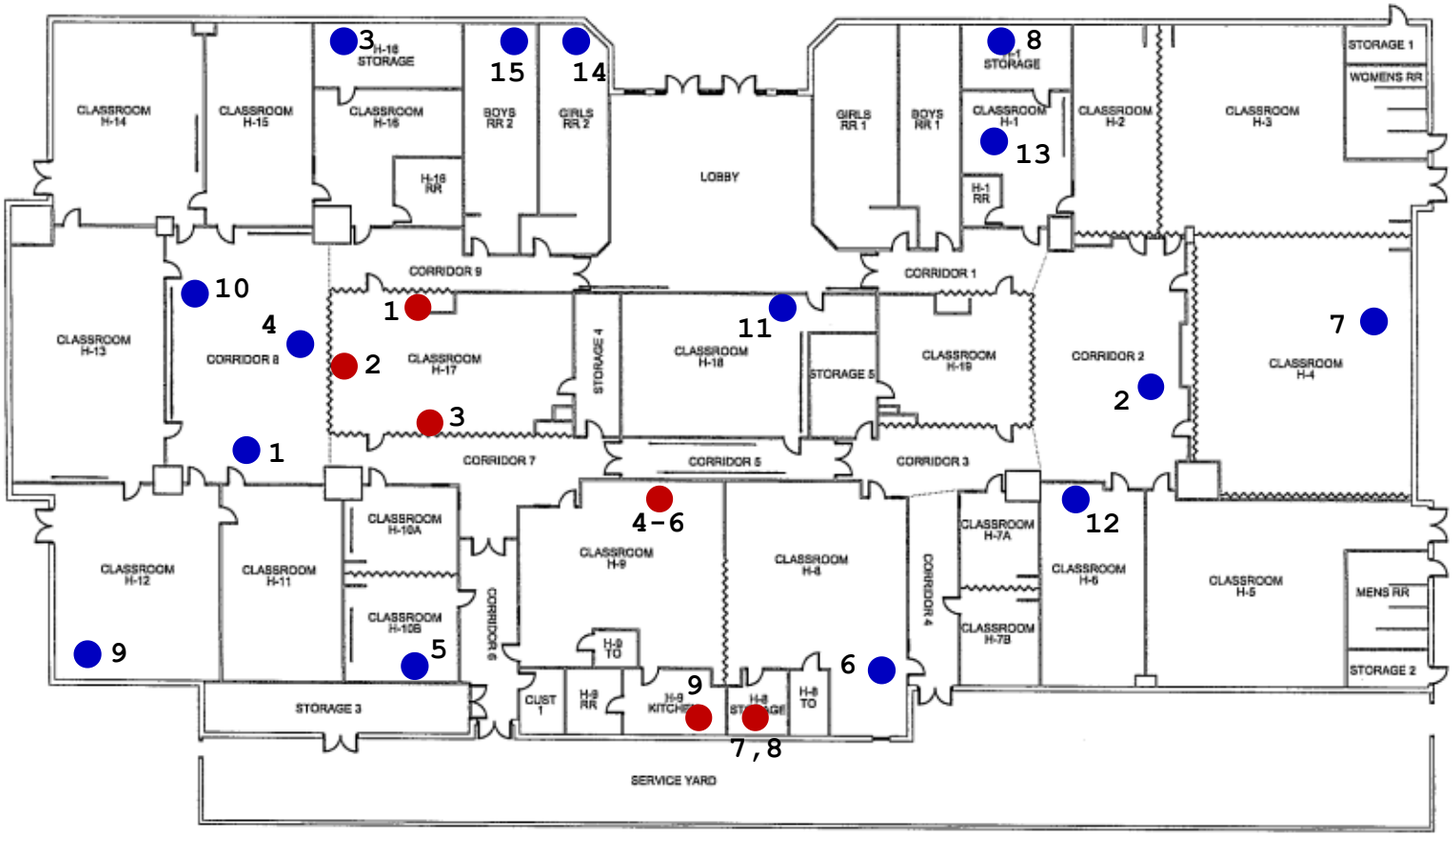

Site Plan
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building H

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

SECTION 8

♦

PHYSICAL ASSESSMENT INFORMATION SHEETS

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.56 **Client:** Kyrene Elementary School District **Site:** Kyrene Centennial Middle School **Bldg. #:** F

(HM) Material #: 44 **Quantity of Material:** 2,500 sq. ft .. **Material in Air Plenum?** Yes No

Material Description: Skylight Insulation Panel **Material Location(s):** Above Ceilings in Classrooms

Material Type: TSI Surfacing
Miscellaneous (Circle One)

Physical Assessment Categories

G	1) Damaged or significantly damaged TSI ACBM	G	5) ACBM with potential for damage
G	2) Damaged friable surfacing ACBM	G	6) ACBM with potential for significant damage
G	3) Significantly damaged friable surfacing ACBM	■	7) Any remaining friable ACBM or friable suspect ACBM
G	4) Damaged or significantly damaged friable misc. ACBM		

Material Condition

Damage Type: G Physical G Water G Air Erosion G Other
G Vandalism G Vibration ■ None

Damage Extent: ■ Low <1% evenly; 10% locally G Moderate <10% evenly; 10% - 25% locally G High >10% evenly; >25% locally

Description of Damage: None, Assumed ACBM

Exposure Factors

Accessibility:	■	Low	**Occupancy:**	G	Low	**Potential for Contact:**	■	Low	**Potential for Vibration:**	G	Low	**Potential for Air Erosion:**	G	Low
	G	Moderate		■	Moderate		G	Moderate		■	Moderate		■	Moderate
	G	High		G	High		G	High		G	High		G	High

Preventative Measures: Low Potential for Disturbance

Hazard Classification/Assessment Categories

■	1) Good condition with low potential for disturbance damage	G	5) Damaged condition with potential for disturbance damage
G	2) Good condition with potential for disturbance damage	G	6) Damaged condition with potential for significant disturbance damage
G	3) Good condition with potential for significant disturbance damage	G	7) Significant damage with potential for any disturbance
G	4) Damaged condition with low potential for disturbance damage		

Inspector: Nick Marcos
Certificate #: ON-188748-8873-031325 **State:** Arizona
Signature: Nick Marcos **Exp Date:** March 13, 2025

Management Planner: Xin Lou
Certificate #: ON-4651-548-100324 **State:** Arizona
Signature: Shane Lou **Exp Date:** October 3, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.56 **Client:** Kyrene Elementary School District **Site:** Kyrene Centennial Middle School **Bldg. #:** G

(HM) Material #: 38 **Quantity of Material:** 1,500 sq. ft .. **Material in Air Plenum?** Yes No

Material Description: Skylight Insulation Panel **Material Location(s):** Above Ceilings in Classrooms

Material Type: TSI Surfacing
Miscellaneous (Circle One)

Physical Assessment Categories

G 1) Damaged or significantly damaged TSI ACBM
G 2) Damaged friable surfacing ACBM
G 3) Significantly damaged friable surfacing ACBM
G 4) Damaged or significantly damaged friable misc. ACBM
G 5) ACBM with potential for damage
G 6) ACBM with potential for significant damage
■ 7) Any remaining friable ACBM or friable suspect ACBM

Material Condition

Damage Type: G Physical G Water G Air Erosion G Other
G Vandalism G Vibration ■ None

Damage Extent: ■ Low <1% evenly; 10% locally G Moderate <10% evenly; 10% - 25% locally G High >10% evenly; >25% locally

Description of Damage: None, Assumed ACBM

Exposure Factors

Accessibility:	■	Low	**Occupancy:**	G	Low	**Potential for Contact:**	■	Low	**Potential for Vibration:**	G	Low	**Potential for Air Erosion:**	G	Low
	G	Moderate		■	Moderate		G	Moderate		■	Moderate		■	Moderate
	G	High		G	High		G	High		G	High		G	High

Preventative Measures: Low Potential for Disturbance

Hazard Classification/Assessment Categories

■ 1) Good condition with low potential for disturbance damage
G 2) Good condition with potential for disturbance damage
G 3) Good condition with potential for significant disturbance damage
G 4) Damaged condition with low potential for disturbance damage
G 5) Damaged condition with potential for disturbance damage
G 6) Damaged condition with potential for significant disturbance damage
G 7) Significant damage with potential for any disturbance

Inspector: Nick Marcos
Certificate #: ON-188748-8873-031325 **State:** Arizona
Signature: Nick Marcos **Exp Date:** March 13, 2025

Management Planner: Xin Lou
Certificate #: ON-4651-548-100324 **State:** Arizona
Signature: Shane Lou **Exp Date:** October 3, 2025

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.56 **Client:** Kyrene Elementary School District **Site:** Kyrene Centennial Middle School **Bldg. #:** H

(HM) Material #: 68 **Quantity of Material:** 2,000 sq. ft .. **Material in Air Plenum?** Yes No

Material Description: Skylight Insulation Panel **Material Location(s):** Above Ceilings in Classrooms

Material Type: TSI Surfacing
Miscellaneous (Circle One)

Physical Assessment Categories

G 1) Damaged or significantly damaged TSI ACBM
G 2) Damaged friable surfacing ACBM
G 3) Significantly damaged friable surfacing ACBM
G 4) Damaged or significantly damaged friable misc. ACBM
G 5) ACBM with potential for damage
G 6) ACBM with potential for significant damage
■ 7) Any remaining friable ACBM or friable suspect ACBM

Material Condition

Damage Type: G Physical G Vandalism G Water G Vibration G Air Erosion ■ None G Other

Damage Extent: ■ Low <1% evenly; 10% locally G Moderate <10% evenly; 10% - 25% locally G High >10% evenly; >25% locally

Description of Damage: None, Assumed ACBM

Exposure Factors

Accessibility:	■	Low	**Occupancy:**	G	Low	**Potential for Contact:**	■	Low	**Potential for Vibration:**	G	Low	**Potential for Air Erosion:**	G	Low
	G	Moderate		■	Moderate		G	Moderate		■	Moderate		■	Moderate
	G	High		G	High		G	High		G	High		G	High

Preventative Measures: Low Potential for Disturbance

Hazard Classification/Assessment Categories

■ 1) Good condition with low potential for disturbance damage
G 2) Good condition with potential for disturbance damage
G 3) Good condition with potential for significant disturbance damage
G 4) Damaged condition with low potential for disturbance damage
G 5) Damaged condition with potential for disturbance damage
G 6) Damaged condition with potential for significant disturbance damage
G 7) Significant damage with potential for any disturbance

Inspector: Nick Marcos
Certificate #: ON-188748-8873-031325 **State:** Arizona
Signature: Nick Marcos **Exp Date:** March 13, 2025

Management Planner: Xin Lou
Certificate #: ON-4651-548-100324 **State:** Arizona
Signature: Shane Lou **Exp Date:** October 3, 2025

SECTION 9

♦

LABORATORY REPORTS

eurofins | Built Environment Testing

Report for:

Tracey Carpenter
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.11; Contennial = Bldg A
EML ID: 3571431

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 03-13-2024

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Contennial = Bldg A

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Total Samples Submitted:	6
Total Samples Analyzed:	6
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, Skip Trowel Drywall System Lab ID-Version‡: 17453837-1

Sample Layers	Asbestos Content
Peach Paint #1	ND
White Texture #1	ND
Cream Tape	ND
White Joint Compound #1	ND
Peach Paint #2	ND
White Joint Compound #2	ND
Yellow Tape (Mesh)	ND
Peach Paint #3	ND
White Texture #2	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-2, Skip Trowel Drywall System Lab ID-Version‡: 17453838-1

Sample Layers	Asbestos Content
Peach Paint #1	ND
White Texture #1	ND
Cream Tape	ND
White Joint Compound	ND
Peach Paint #2	ND
White Texture #2	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Contennial = Bldg A

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM-3, Skip Trowel Drywall System

Lab ID-Version‡: 17453839-1

Sample Layers	Asbestos Content
Peach Paint #1	ND
White Texture #1	ND
Cream Tape	ND
White Joint Compound	ND
Peach Paint #2	ND
White Texture #2	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Contennial = Bldg A

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM-4, White w/Gray Specks 12''x12'' VCT & Mastic Lab ID-Version‡: 17453840-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Semi-Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-5, White w/Gray Specks 12''x12'' VCT & Mastic Lab ID-Version‡: 17453841-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Semi-Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-6, White w/Gray Specks 12''x12'' VCT & Mastic Lab ID-Version‡: 17453842-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Semi-Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins

www.EMLabPK.com

EMLab P&K

Marlton, NJ: 3000 Lincoln Dr E, Ste. A, Marlton, NJ 08053 * **(866) 871-1984**
Phoenix, AZ: 1501 West Knudsen Drive, Phoenix, AZ 85027 * **(800) 651-4802**
SSF, CA: 6000 Shoreline Ct, Ste. 205, S. San Francisco, CA 94080 * **(866) 888-6653**

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

003571431

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address: 20045 N. 19th Ave, Bldg 7, Phoenix, AZ 85027	
Contact:	Tracey Carpenter	Special Instructions: email results: tcarpenter@dominion-env.com	
Phone:	(602) 989-9992		

PROJECT INFORMATION

Project ID:	AZ1418.11		
Project Description:	Centennial - Bldg A		
Project Zip Code:	85044	Sampling Date/Time:	3/12/24 @ 9:45 AM
PO Number:	316021	Sampled By:	TLC

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	Skip Trowel Drywall System	B	STD		
PLM 4-6	White w/Gray Specks 12" x 12" VCT + Mastic	B	STD		

SERVICES	Spore Trap		Tape, Swab, Bulk			Cassette Andersen, SAS, Swab, Water, Bulk, Dust, Soil, Contact Plate								Other Requests					
	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quantitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp. spp.)	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and Surface Bacteria)	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)		Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb)	PCR (please specify test)	Allergens (please specify test)	
PLM 1-3															X				
PLM 4-6															X				

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Tracey Carpenter	3/13/24 @ 8 AM	Kathy Wyo	3/13/24 8:10am

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.56; Kyrene Centennial Middle School-Bldg A
EML ID: 4180251

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 08-11-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg A

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885639-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-2, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885640-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-3, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885641-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-4, Old 2"x2" Ceiling Tile Lab ID-Version‡: 20885642-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg A

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-5, Old 2"x2" Ceiling Tile Lab ID-Version‡: 20885643-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-6, Old 2"x2" Ceiling Tile Lab ID-Version‡: 20885644-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885645-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-8, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885646-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg A

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-9, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885647-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-10, Blue Cove Base and Mastic Lab ID-Version‡: 20885648-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Blue Cove Base and Mastic Lab ID-Version‡: 20885649-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Blue Cove Base and Mastic Lab ID-Version‡: 20885650-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg A

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-13, Orange Peel D.W. (paint,tex,tape,j.c.d.w.) Lab ID-Version‡: 20885651-1

Sample Layers	Asbestos Content
Beige Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-14, Orange Peel D.W. (paint,tex,tape,j.c.d.w.) Lab ID-Version‡: 20885652-1

Sample Layers	Asbestos Content
Beige Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-15, Orange Peel D.W. (paint,tex,tape,j.c.d.w.) Lab ID-Version‡: 20885653-1

Sample Layers	Asbestos Content
Beige Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg A

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst

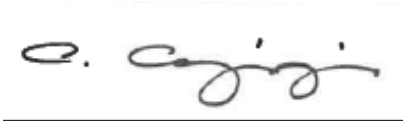

Analyst: Aaron Agajanian

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.56		
Project Description:	Kyrene Centennial Middle School - Bldg A		
Project Zip Code:		Sampling Date/Time:	8/4/2025
PO Number:	16805	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

REQUESTED SERVICES

Non-Culturable | Culturable | Requests

004180251

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quatitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp. spp.)	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and Surfac	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOS	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3	New 2' X 2' Ceiling Tile	B	STD																X			
PLM 4-6	Old 2' X 2' Ceiling Tile	B	STD																X			
PLM 7-9	Gray Multi-Color Carpet Square and Mastic	B	STD																X			
PLM 10-12	Blue Cove Base and Mastic	B	STD																X			
PLM 13-15	Orange Peel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD																X			

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Nick Marcos	8/8/2025		8-8-25 3:45 pc

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Tracey Carpenter
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.11; Centenial - Bldg B
EML ID: 3571460

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 03-13-2024

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg B

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Total Samples Submitted:	6
Total Samples Analyzed:	6
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM1, 2"x2" Tan Floor Tile + Grout + Thinset Lab ID-Version‡: 17454157-1

Sample Layers	Asbestos Content
Tan Ceramic Tile	ND
Cream Mastic	ND
Gray Grout	ND
Gray Mortar	ND
Sample Composite Homogeneity:	Poor

Location: PLM2, 2"x2" Tan Floor Tile + Grout + Thinset Lab ID-Version‡: 17454158-1

Sample Layers	Asbestos Content
Tan Ceramic Tile	ND
Gray Grout	ND
Gray Mortar	ND
Sample Composite Homogeneity:	Poor

Location: PLM3, 2"x2" Tan Floor Tile + Grout + Thinset Lab ID-Version‡: 17454159-1

Sample Layers	Asbestos Content
Tan Ceramic Tile	ND
Cream Mastic	ND
Gray Grout	ND
Gray Mortar	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg B

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM4, White RR Wall Tile + Grout + Mastic Lab ID-Version‡: 17454160-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

Location: PLM5, White RR Wall Tile + Grout + Mastic Lab ID-Version‡: 17454161-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Gray Caulk	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

Location: PLM6, White RR Wall Tile + Grout + Mastic Lab ID-Version‡: 17454162-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins

www.EMLabPK.com

EMLab P&K

Marlton, NJ: 3000 Lincoln Dr E, Ste. A, Marlton, NJ 08053 * (866) 871-1984
Phoenix, AZ: 1501 West Knudsen Drive, Phoenix, AZ 85027 * (800) 651-4802
SSF, CA: 6000 Shoreline Ct, Ste. 205, S. San Francisco, CA 94080 * (866) 888-6653

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address: 20045 N. 19th Ave, Bldg 7, Phoenix, AZ 85027	
Contact:	Tracey Carpenter	Special Instructions: email results: tcarpenter@dominion-env.com	
Phone:	(602) 989-9992		

PROJECT INFORMATION

Project ID:	AZ1418.11		
Project Description:	Centenial - Bldg B		
Project Zip Code:	85044	Sampling Date/Time:	3/12@9:30 AM
PO Number:	316022	Sampled By:	TLC

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

REQUESTED SERVICES

Non-Culturable: Spore Trap; Tape, Swab, Bulk
Culturable: BioCassette™, Andersen, SAS, Swab, Water, Bulk, Dust, Soil, Contact Plate
Other Requests

003571460

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	2" x 2" Tan Floor Tile + Grout + Thinset	B / 1	STD / 1		
PLM 4-6	White RR Wall Tile + Grout + Mastic	B / 1	STD / 1		

Spore Trap Analysis	Other biological particles - suppleme	Direct Microscopic Exam (Qualitative	Qualitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + /	Culturable Air Fungi (Genus ID + Asp	Gram Stain and Counts (Culturable A	Legionella culture	Total Coliform, E.coli (Presence/Abse	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb)	PCR (please specify test)	Allergens (please specify test)
													X			
													+			

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Tracey Carp	3/13/24 @8 AM	Patty Lugo	3/13/24 8:10 am

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.56; Kyrene Centennial Middle School- Bldg B
EML ID: 4180258

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 08-11-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg B

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885830-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-2, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885831-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-3, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885832-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-4, Old 2"x2" Ceiling Tile Lab ID-Version‡: 20885833-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg B

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-5, Old 2"x2" Ceiling Tile Lab ID-Version‡: 20885834-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-6, Old 2"x2" Ceiling Tile Lab ID-Version‡: 20885835-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885836-1

Sample Layers	Asbestos Content
Gray Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-8, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885837-1

Sample Layers	Asbestos Content
Gray Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg B

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-9, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885838-1

Sample Layers	Asbestos Content
Gray Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-10, Blue Cove Base and Mastic Lab ID-Version‡: 20885839-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Blue Cove Base and Mastic Lab ID-Version‡: 20885840-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Blue Cove Base and Mastic Lab ID-Version‡: 20885841-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg B

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-13, Orange Peel D.W. (paint,tex,tape,j.c.,d.w.) Lab ID-Version‡: 20885842-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-14, Orange Peel D.W. (paint,tex,tape,j.c.,d.w.) Lab ID-Version‡: 20885843-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-15, Orange Peel D.W. (paint,tex,tape,j.c.,d.w.) Lab ID-Version‡: 20885844-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg B

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Kaitlyn Walker

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.56		
Project Description:	Kyrene Centennial Middle School - Bldg B		
Project Zip Code:		Sampling Date/Time:	8/5/2025
PO Number:	16808	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

REQUESTED SERVICES

Non

Spore Trap

004180258

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quatitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + *Asp.* spp.)	Culturable Air Fungi (Genus ID + *Asp.* spp.)	Gram Stain and Counts (Culturable Air and Surface	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3	New 2' X 2' Ceiling Tile	B	STD																X			
PLM 4-6	Old 2' X 2' Ceiling Tile	B	STD																X			
PLM 7-9	Gray Multi-Color Carpet Square and Mastic	B	STD																X			
PLM 10-12	Blue Cove Base and Mastic	B	STD																X			
PLM 13-15	Orange Peel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD																X			

Other Requests

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Nick Marcos	8/8/2025		8-8-25 3:35 PM

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Tracey Carpenter
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.11; Centenial - Bldg C
EML ID: 3571470

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 03-13-2024

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg C

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Total Samples Submitted:	3
Total Samples Analyzed:	3
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM1, White RR Wall Tiles + Grout + Mastic Lab ID-Version‡: 17454045-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

Location: PLM2, White RR Wall Tiles + Grout + Mastic Lab ID-Version‡: 17454046-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

Location: PLM3, White RR Wall Tiles + Grout + Mastic Lab ID-Version‡: 17454047-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins

www.EMLabPK.com

EMLab P&K

Marlton, NJ: 3000 Lincoln Dr E, Ste. A, Marlton, NJ 08053 * (866) 871-1984
Phoenix, AZ: 1501 West Knudsen Drive, Phoenix, AZ 85027 * (800) 651-4802
SSF, CA: 6000 Shoreline Ct, Ste. 205, S. San Francisco, CA 94080 * (866) 888-6653

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

REQUESTED SERVICES

Non-Culturable		Culturable	Other Requests
Spore Trap	Tape, Swab, Bulk	BioCassette™, Andersen, SAS, Swab, Water, Soil,	

003571470

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address: 20045 N. 19th Ave, Bldg 7, Phoenix, AZ 85027	
Contact:	Tracey Carpenter	Special Instructions: email results: tcarpenter@dominion-env.com	
Phone:	(602) 989-9992		

PROJECT INFORMATION

Project ID:	AZ 1418.11		
Project Description:	Centenial - Bldg C		
Project Zip Code:	85044	Sampling Date/Time:	3/12/24 @ 10:30 AM
PO Number:	316023	Sampled By:	TLC

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quantitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp.	Culturable Air Fungi (Genus ID + Asp. sp	Gram Stain and Counts (Culturable Air an	Legionella culture	Total Coliform, E.coli (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb)	PCR (please specify test)	Allergens (please specify test)
PLM 1-3	White RR Wall Tiles	B	STD																X			
	+ Grout + Mastic	1	1																1-X			

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Tracy Carp	3/13/24 @ 8 AM	Ruby Lugo	3/13/24 8:10 am

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.56; Kyrene Centennial Middle School- Bldg C
EML ID: 4180255

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 08-11-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg C

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, New 2"x2" Ceiling Tile Lab ID-Version‡: 20886079-1

Sample Layers	Asbestos Content
Gray/White Ceiling Tile	ND
Composite Non-Asbestos Content:	60% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-2, New 2"x2" Ceiling Tile Lab ID-Version‡: 20886080-1

Sample Layers	Asbestos Content
Gray/White Ceiling Tile	ND
Composite Non-Asbestos Content:	60% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-3, New 2"x2" Ceiling Tile Lab ID-Version‡: 20886081-1

Sample Layers	Asbestos Content
Gray/White Ceiling Tile	ND
Composite Non-Asbestos Content:	60% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-4, Old 2"x2" Ceiling Tile Lab ID-Version‡: 20886082-1

Sample Layers	Asbestos Content
Gray/White Ceiling Tile	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg C

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-5, Old 2"x2" Ceiling Tile

Lab ID-Version‡: 20886083-1

Sample Layers	Asbestos Content
Gray/White Ceiling Tile	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-6, Old 2"x2" Ceiling Tile

Lab ID-Version‡: 20886084-1

Sample Layers	Asbestos Content
Gray/White Ceiling Tile	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20886085-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-8, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20886086-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg C

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-9, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20886087-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-10, Blue Cove Base and Mastic Lab ID-Version‡: 20886088-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Blue Cove Base and Mastic Lab ID-Version‡: 20886089-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Blue Cove Base and Mastic Lab ID-Version‡: 20886090-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg C

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-13, Orange poeel D.W. (paint,tex,tape,j.c,d.w) Lab ID-Version‡: 20886091-1

Sample Layers	Asbestos Content
Cream Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
Cream Tape 2	ND
White Joint Compound 2	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	18% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-14, Orange poeel D.W. (paint,tex,tape,j.c,d.w) Lab ID-Version‡: 20886092-1

Sample Layers	Asbestos Content
Cream Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
Cream Tape 2	ND
White Joint Compound 2	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	18% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-15, Orange poeel D.W. (paint,tex,tape,j.c,d.w) Lab ID-Version‡: 20886093-1

Sample Layers	Asbestos Content
Cream Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-Bldg C

Date of Sampling: 08-05-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst

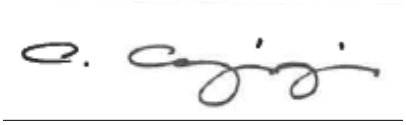

Analyst: Aaron Agajanian

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.56		
Project Description:	Kyrene Centennial Middle School - Bldg C		
Project Zip Code:		Sampling Date/Time:	8/5/2025
PO Number:	16809	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

REQUESTED SERVICES

004180255

Non-Cultural

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quatitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp. spp.)	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and Surface Ba	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3	New 2' X 2' Ceiling Tile	B	STD																X			
PLM 4-6	Old 2' X 2' Ceiling Tile	B	STD																X			
PLM 7-9	Gray Multi-Color Carpet Square and Mastic	B	STD																X			
PLM 10-12	Blue Cove Base and Mastic	B	STD																X			
PLM 13-15	Orange Peel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD																X			

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Nick Marcos	8/8/2025		8-8-25
			3:35 PM

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Tracey Carpenter
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.11; Centenial - Bldg D
EML ID: 3571449

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 03-13-2024

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg D

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Total Samples Submitted:	12
Total Samples Analyzed:	12
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM1, White RR Wall Tiles + Grout + Mastic Lab ID-Version‡: 17454320-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

Location: PLM2, White RR Wall Tiles + Grout + Mastic Lab ID-Version‡: 17454321-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

Location: PLM3, White RR Wall Tiles + Grout + Mastic Lab ID-Version‡: 17454322-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg D

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM4, 2"x2" Tan Floor Tiles + Grout + Thinset

Lab ID-Version‡: 17454323-1

Sample Layers	Asbestos Content
Off-White Ceramic Tile	ND
Gray Grout	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg D

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM5, 2"x2" Tan Floor Tiles + Grout + Thinset Lab ID-Version‡: 17454324-1

Sample Layers	Asbestos Content
Off-White Ceramic Tile	ND
Gray Grout	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Poor

Location: PLM6, 2"x2" Tan Floor Tiles + Grout + Thinset Lab ID-Version‡: 17454325-1

Sample Layers	Asbestos Content
Off-White Ceramic Tile	ND
Gray Grout	ND
Yellow Mastic	ND
Dark Gray Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM7, 2"x2" Pink Floor Tile + Grout + Thinset Lab ID-Version‡: 17454326-1

Sample Layers	Asbestos Content
Pink Ceramic Tile	ND
Gray Grout	ND
Beige Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM8, 2"x2" Pink Floor Tile + Grout + Thinset Lab ID-Version‡: 17454327-1

Sample Layers	Asbestos Content
Pink Ceramic Tile	ND
Gray Grout	ND
Beige Thinset	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg D

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM9, 2"x2" Pink Floor Tile + Grout + Thinset Lab ID-Version‡: 17454328-1

Sample Layers	Asbestos Content
Pink Ceramic Tile	ND
Gray Grout	ND
Beige Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM10, 2"x2" Green Floor Tile + Grout + Thinset Lab ID-Version‡: 17454329-1

Sample Layers	Asbestos Content
Green Ceramic Tile	ND
Gray Grout	ND
Beige Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM11, 2"x2" Green Floor Tile + Grout + Thinset Lab ID-Version‡: 17454330-1

Sample Layers	Asbestos Content
Green Ceramic Tile	ND
Gray Grout	ND
Beige Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM12, 2"x2" Green Floor Tile + Grout + Thinset Lab ID-Version‡: 17454331-1

Sample Layers	Asbestos Content
Green Ceramic Tile	ND
Gray Grout	ND
Beige Thinset	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins

www.EMLabPK.com

EMLab P&K

Marlton, NJ: 3000 Lincoln Dr E, Ste. A, Marlton, NJ 08053 * (866) 871-1984
Phoenix, AZ: 1501 West Knudsen Drive, Phoenix, AZ 85027 * (800) 651-4802
SSF, CA: 6000 Shoreline Ct, Ste. 205, S. San Francisco, CA 94080 * (866) 888-6653

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

REQUESTED SERVICES

Non-Culturable: Spore Trap; Tape, Swab, Bulk

Culturable: BioCassette™, Andersen, SAS, Swab, Water, Bulk, Dust, Soil, Contact Plate

Other Requests

003571449

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address: 20045 N. 19th Ave, Bldg 7, Phoenix, AZ 85027	
Contact:	Tracey Carpenter	Special Instructions: email results: tcarpenter@dominion-env.com	
Phone:	(602) 989-9992		

PROJECT INFORMATION

Project ID:	AZ 1418.11		
Project Description:	Centenial - Bldg D		
Project Zip Code:	85044	Sampling Date/Time:	3/12/24 @10:30 AM
PO Number:	316024	Sampled By:	TLC

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	White RR Wall Tiles	B	STD		
	+ Grout + Mastic	1	1		
PLM 4-6	2" x 2" Tan Floor Tiles	B	STD		
	+ Grout + Thinset	1			
PLM 7-9	2" x 2" Pink Floor Tile	B	STD		
	+ Grout + Thinset	1	1		
PLM 10-12	2" x 2" Green Floor Tile	B	STD		
	+ Grout + Thinset	1			

Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quantitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp	Culturable Air Fungi (Genus ID + Asp. s	Gram Stain and Counts (Culturable Air s	Legionella culture	Total Coliform, E.coli (Presence/Absenc	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb)	PCR (please specify test)	Allergens (please specify test)
												7	7			
													7			
													X			
												X				
												7				

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME
Tracey Carp	3/13/24 @8AM

RECEIVED BY	DATE & TIME
Dyani Zamora	3/13/24 810AM

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.56; Kyrene Centennial Middle School - Bldg. D
EML ID: 4180266

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 08-11-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. D

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, New 2'x2' Ceiling Tile

Lab ID-Version‡: 20885860-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-2, New 2'x2' Ceiling Tile

Lab ID-Version‡: 20885861-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-3, New 2'x2' Ceiling Tile

Lab ID-Version‡: 20885862-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-4, Old 2'x2' Ceiling Tile

Lab ID-Version‡: 20885863-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. D

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-5, Old 2'x2' Ceiling Tile Lab ID-Version‡: 20885864-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-6, Old 2'x2' Ceiling Tile Lab ID-Version‡: 20885865-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Gray Mulit-Color Carpet Square and Mastic Lab ID-Version‡: 20885866-1

Sample Layers	Asbestos Content
Blue Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-8, Gray Mulit-Color Carpet Square and Mastic Lab ID-Version‡: 20885867-1

Sample Layers	Asbestos Content
Blue Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. D

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-9, Gray Mulit-Color Carpet Square and Mastic Lab ID-Version‡: 20885868-1

Sample Layers	Asbestos Content
Blue Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-10, Blue Cove Base and Mastic Lab ID-Version‡: 20885869-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Blue Cove Base and Mastic Lab ID-Version‡: 20885870-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Blue Cove Base and Mastic Lab ID-Version‡: 20885871-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. D

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

Location: PLM-13, Orange Peel D.W. (paint, tex, tape, j.c., d.w. Lab ID-Version‡: 20885872-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-14, Orange Peel D.W. (paint, tex, tape, j.c., d.w. Lab ID-Version‡: 20885873-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-15, Orange Peel D.W. (paint, tex, tape, j.c., d.w. Lab ID-Version‡: 20885874-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. D

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-11-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst

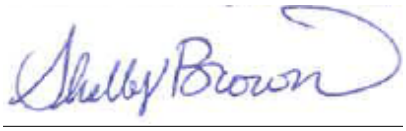

Analyst: Shelby Brown

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

004180266

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.56		
Project Description:	Kyrene Centennial Middle School - Bldg. D		
Project Zip Code:		Sampling Date/Time:	8/6/2025
PO Number:	16811	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SERVICES

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quatitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + *Asp.* spp.)	Culturable Air Fungi (Genus ID + *Asp.* spp.)	Gram Stain and Counts (Culturable Air and Surface Bacter	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Other Requests: Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3	New 2' X 2' Ceiling Tile	B	STD																X			
PLM 4-6	Old 2' X 2' Ceiling Tile	B	STD																X			
PLM 7-9	Gray Multi-Color Carpet Square and Mastic	B	STD																X			
PLM 10-12	Blue Cove Base and Mastic	B	STD																X			
PLM 13-15	Orange Peel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD																X			

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME
Nick Marcos	8/8/2025

RECEIVED BY	DATE & TIME
Patty Lugo	8/8/25 2:40pm

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Tracey Carpenter
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.11; Centenial - Bldg E
EML ID: 3571445

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 03-13-2024

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg E

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Total Samples Submitted:	12
Total Samples Analyzed:	12
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM1, Red 12"x12" VCT + Mastic Lab ID-Version‡: 17454405-1

Sample Layers	Asbestos Content
Red Floor Tile	ND
Semi-Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM2, Red 12"x12" VCT + Mastic Lab ID-Version‡: 17454406-1

Sample Layers	Asbestos Content
Red Floor Tile	ND
Semi-Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM3, Red 12"x12" VCT + Mastic Lab ID-Version‡: 17454407-1

Sample Layers	Asbestos Content
Red Floor Tile	ND
Semi-Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM4, Brown Stair Tread + Mastic Lab ID-Version‡: 17454408-1

Sample Layers	Asbestos Content
Brown Stair Tread	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg E

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM5, Brown Stair Tread + Mastic Lab ID-Version‡: 17454409-1

Sample Layers	Asbestos Content
Brown Stair Tread	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM6, Brown Stair Tread + Mastic Lab ID-Version‡: 17454410-1

Sample Layers	Asbestos Content
Brown Stair Tread	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM7, White RR Wall Tiles + Grout Lab ID-Version‡: 17454411-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Sample Composite Homogeneity:	Moderate

Location: PLM8, White RR Wall Tiles + Grout Lab ID-Version‡: 17454412-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg E

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM9, White RR Wall Tiles + Grout Lab ID-Version‡: 17454413-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Gray Grout	ND
Sample Composite Homogeneity:	Moderate

Location: PLM10, White 2"x2" Floor Tiles + Grout + Thinset Lab ID-Version‡: 17454414-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Dark Gray Grout	ND
Dark Gray Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM11, White 2"x2" Floor Tiles + Grout + Thinset Lab ID-Version‡: 17454415-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Dark Gray Grout	ND
Dark Gray Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM12, White 2"x2" Floor Tiles + Grout + Thinset Lab ID-Version‡: 17454416-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Dark Gray Grout	ND
Dark Gray Thinset	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins

www.EMLabPK.com

EMLab P&K

Marlton, NJ: 3000 Lincoln Dr E, Ste. A, Marlton, NJ 08053 * (866) 871-1984
Phoenix, AZ: 1501 West Knudsen Drive, Phoenix, AZ 85027 * (800) 651-4802
SSF, CA: 6000 Shoreline Ct, Ste. 205, S. San Francisco, CA 94080 * (866) 888-6653

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

REQUESTED SERVICES

Non-Culturable: Spore | Tape.

Culturable: BioCassette™ | Andersen, SAS, Dust, Soil, ate

Other Requests

003571445

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address: 20045 N. 19th Ave, Bldg 7, Phoenix, AZ 85027	
Contact:	Tracey Carpenter	Special Instructions: email results: tcarpenter@dominion-env.com	
Phone:	(602) 989-9992		

PROJECT INFORMATION

Project ID:	AZ 1418.11		
Project Description:	Centenial - Bldg E		
Project Zip Code:	85044	Sampling Date/Time:	3/12/24 @ 10AM
PO Number:	316025	Sampled By:	TL

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	Red 12"x12" VCT	B	STD		
	+ Mastic	1	1		
PLM 4-6	Brown Stair Tread	B	STD		
	+ Mastic	1	1		
PLM 7-9	White RR Wall Tiles	B	STD		
	+ Grout	1	1		
PLM 10-12	White 2" x 2" Floor Tile	B	STD		
	+ Grout + Thinset	1	1		

	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quantitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp. sp	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and S	Legionella culture	Total Coliform, E.coli (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb)	PCR (please specify test)	Allergens (please specify test)
PLM 1-3														X			
PLM 4-6														X			
PLM 7-9														X			
PLM 10-12														X			

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Tracey Carp	3/13/24 @ 8AM	Dyani Zamora	3/13/24 810AM

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.56; Kyrene Centennial Middle School-MPR Bldg
EML ID: 4180253

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 08-11-2025 and 08-12-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-MPR Bldg

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885679-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-2, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885680-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-3, New 2"x2" Ceiling Tile Lab ID-Version‡: 20885681-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-4, Old 2"x2" Ceiling Tile Lab ID-Version‡: 20885682-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-MPR Bldg

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-5, Old 2"x2" Ceiling Tile

Lab ID-Version‡: 20885683-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-6, Old 2"x2" Ceiling Tile

Lab ID-Version‡: 20885684-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-7, Peach Soundboard Wrap and Insulation

Lab ID-Version‡: 20885685-1

Sample Layers	Asbestos Content
Peach Sound Board	ND
Yellow Adhesive	ND
Composite Non-Asbestos Content:	90% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-8, Peach Soundboard Wrap and Insulation

Lab ID-Version‡: 20885686-1

Sample Layers	Asbestos Content
Peach Sound Board	ND
Yellow Adhesive	ND
Composite Non-Asbestos Content:	90% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-MPR Bldg

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-9, Peach Soundboard Wrap and Insulation Lab ID-Version‡: 20885687-1

Sample Layers	Asbestos Content
Peach Sound Board	ND
Yellow Adhesive	ND
Composite Non-Asbestos Content:	90% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-10, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885688-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885689-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20885690-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-MPR Bldg

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-13, Orange Peel D.W. (paint,tex,tape,j.c.,d.w.) Lab ID-Version‡: 20885691-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-14, Orange Peel D.W. (paint,tex,tape,j.c.,d.w.) Lab ID-Version‡: 20885692-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Yellow Paint	ND
White Texture 2	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-15, Orange Peel D.W. (paint,tex,tape,j.c.,d.w.) Lab ID-Version‡: 20885693-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Off-White Paint 2	ND
White Texture 2	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School-MPR Bldg

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025


ASBESTOS PLM REPORT

PROJECT ANALYSTS AND SIGNATORY REPORT

Project Analysts



Analyst: Jason Bosse



Analyst: Kayla Heinen

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.56		
Project Description:	Kyrene Centennial Middle School - MPR Bldg.		
Project Zip Code:		Sampling Date/Time:	8/6/2025
PO Number:	16810	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

REQUESTED SERVICES

Non-Culturable: Spore Trap; Tape, Swab, Bulk
Culturable: BioCassette™ Andersen, SAS,
Other Requests

004180253

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Qualitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp. sp	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Coun	Asbestos Bulk - PLM (EPA method 600/R-9	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3	New 2' X 2' Ceiling Tile	B	STD																X			
PLM 4-6	Old 2' X 2' Ceiling Tile	B	STD																X			
PLM 7-9	Peach Soundboard Wrap and Insulation	B	STD																X			
PLM 10-12	Gray Multi-Color Carpet Square and Mastic	B	STD																X			
PLM 13-15	Orange Pèel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD																X			

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Nick Marcos	8/8/2025		8-8-25 3:35 pm

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.56; Kyrene Centennial Middle School - Bldg. F
EML ID: 4180262

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 08-12-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. F

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885940-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-2, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885941-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-3, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885942-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-4, Old 2'x2' Ceiling Tile Lab ID-Version‡: 20885943-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. F

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-5, Old 2'x2' Ceiling Tile Lab ID-Version‡: 20885944-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-6, Old 2'x2' Ceiling Tile Lab ID-Version‡: 20885945-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-7, Lightly Textured 2'x2' Ceiling Tile Lab ID-Version‡: 20885946-1

Sample Layers	Asbestos Content
Off-White Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-8, Lightly Textured 2'x2' Ceiling Tile Lab ID-Version‡: 20885947-1

Sample Layers	Asbestos Content
Off-White Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. F

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-9, Lightly Textured 2'x2' Ceiling Tile Lab ID-Version‡: 20885948-1

Sample Layers	Asbestos Content
Off-White Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 30% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-10, Gray Mulit-Color Carpet Square and Mastic Lab ID-Version‡: 20885949-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Gray Mulit-Color Carpet Square and Mastic Lab ID-Version‡: 20885950-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Gray Mulit-Color Carpet Square and Mastic Lab ID-Version‡: 20885951-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. F

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-13, Orange Peel D.W. (paint, tex, tape, j.c, d.w.) Lab ID-Version‡: 20885952-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-14, Orange Peel D.W. (paint, tex, tape, j.c, d.w.) Lab ID-Version‡: 20885953-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-15, Orange Peel D.W. (paint, tex, tape, j.c, d.w.) Lab ID-Version‡: 20885954-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. F

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Renee Luna-Trepczynski

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

004180262

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.56		
Project Description:	Kyrene Centennial Middle School - Bldg F		
Project Zip Code:		Sampling Date/Time:	8/4/2025
PO Number:	16807	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	New 2' X 2' Ceiling Tile	B	STD		
PLM 4-6	Old 2' X 2' Ceiling Tile	B	STD		
PLM 7-9	Lightly Textured 2' X 2' Ceiling Tile	B	STD		
PLM 10-12	Gray Multi-Color Carpet Square and Mastic	B	STD		
PLM 13-15	Orange Peel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD		

SERVICES

SAMPLE ID	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Qualitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + *Asp.* spp.)	Culturable Air Fungi (Genus ID + *Asp.* spp.)	Gram Stain and Counts (Culturable Air and Surface Bacteria	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3														X			
PLM 4-6														X			
PLM 7-9														X			
PLM 10-12														X			
PLM 13-15														X			

Other Requests

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME
Nick Marcos	8/8/2025

RECEIVED BY	DATE & TIME
Perla Lugo	8/8/25 2:40pm.

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.56; Kyrene Centennial Middle School - Bldg. G
EML ID: 4180256

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 08-12-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. G

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, Lightly Textured 2'x2' Ceiling Tile Lab ID-Version‡: 20885984-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	80% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-2, Lightly Textured 2'x2' Ceiling Tile Lab ID-Version‡: 20885985-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	80% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-3, Lightly Textured 2'x2' Ceiling Tile Lab ID-Version‡: 20885986-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	80% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-4, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885987-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. G

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-5, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885988-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-6, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885989-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	50% Cellulose 15% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Old 2'x2 Ceiling Tile Lab ID-Version‡: 20885990-1

Sample Layers	Asbestos Content
Tan Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-8, Old 2'x2 Ceiling Tile Lab ID-Version‡: 20885991-1

Sample Layers	Asbestos Content
Tan Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. G

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-9, Old 2'x2 Ceiling Tile

Lab ID-Version‡: 20885992-1

Sample Layers	Asbestos Content
Tan Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	55% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-10, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20885993-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20885994-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20885995-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Multicolored Mastic	ND
Composite Non-Asbestos Content:	50% Synthetic Fibers < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. G

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-13, Orange Peel D.W. (paint, text, tape, j.c., d.w.) Lab ID-Version‡: 20885996-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-14, Orange Peel D.W. (paint, text, tape, j.c., d.w.) Lab ID-Version‡: 20885997-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-15, Orange Peel D.W. (paint, text, tape, j.c., d.w.) Lab ID-Version‡: 20885998-1

Sample Layers	Asbestos Content
Off-White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. G

Date of Sampling: 08-04-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst

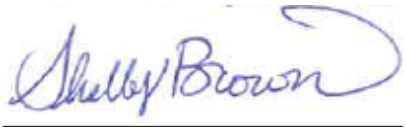

Analyst: Shelby Brown

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

004180256

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.56		
Project Description:	Kyrene Centennial Middle School - Bldg G		
Project Zip Code:		Sampling Date/Time:	8/4/2025
PO Number:	16806	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quatitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp. spp.)	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and Surface Bacteria	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3	Lightly Textured 2' X 2' Ceiling Tile	B	STD																X			
PLM 4-6	New 2' X 2' Ceiling Tile	B	STD																X			
PLM 7-9	Old 2' X 2' Ceiling Tile	B	STD																X			
PLM 10-12	Gray Multi-Color Carpet Square and Mastic	B	STD																X			
PLM 13-15	Orange Peel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD																X			

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME
Nick Marcos	8/8/2025

RECEIVED BY	DATE & TIME
Paula Lego	8/8/25 2:40pm

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Tracey Carpenter
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.11; Centenial - Bldg H
EML ID: 3571465

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 03-13-2024

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg H

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Total Samples Submitted:	9
Total Samples Analyzed:	9
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM1, Orange Peel Drywall System (Paint, Texture, Tape, Joint Comp. + Drywall)

Lab ID-Version‡: 17454100-1

Sample Layers	Asbestos Content
Multicolored Paint Layers	ND
White Texture	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	10% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM2, Orange Peel Drywall System (Paint, Texture, Tape, Joint Comp. + Drywall)

Lab ID-Version‡: 17454101-1

Sample Layers	Asbestos Content
Multicolored Paint Layers	ND
White Texture	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	10% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM3, Orange Peel Drywall System (Paint, Texture, Tape, Joint Comp. + Drywall)

Lab ID-Version‡: 17454102-1

Sample Layers	Asbestos Content
Multicolored Paint Layers	ND
White Texture	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	10% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg H

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM4, Tac Board

Lab ID-Version‡: 17454103-1

Sample Layers	Asbestos Content
Brown Fiberboard with Multicolored Surface	ND
Composite Non-Asbestos Content:	70% Cellulose
Sample Composite Homogeneity:	Good

Location: PLM5, Tac Board

Lab ID-Version‡: 17454104-1

Sample Layers	Asbestos Content
Brown Fiberboard with Multicolored Surface	ND
Composite Non-Asbestos Content:	70% Cellulose
Sample Composite Homogeneity:	Good

Location: PLM6, Tac Board

Lab ID-Version‡: 17454105-1

Sample Layers	Asbestos Content
Brown Fiberboard with Multicolored Surface	ND
Composite Non-Asbestos Content:	70% Cellulose
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Centenial - Bldg H

Date of Sampling: 03-12-2024
Date of Receipt: 03-13-2024
Date of Report: 03-13-2024

ASBESTOS PLM REPORT

Location: PLM7, White 12"x12" VCT + Mastic Lab ID-Version‡: 17454106-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM8, White 12"x12" VCT + Mastic Lab ID-Version‡: 17454107-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM9, White 12"x12" VCT + Mastic Lab ID-Version‡: 17454108-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Transparent Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins

www.EMLabPK.com

EMLab P&K

Marlton, NJ: 3000 Lincoln Dr E, Ste. A, Marlton, NJ 08053 * (866) 871-1984
Phoenix, AZ: 1501 West Knudsen Drive, Phoenix, AZ 85027 * (800) 651-4802
SSF, CA: 6000 Shoreline Ct, Ste. 205, S. San Francisco, CA 94080 * (866) 888-6653

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address: 20045 N. 19th Ave, Bldg 7, Phoenix, AZ 85027	
Contact:	Tracey Carpenter	Special Instructions: email results: tcarpenter@dominion-env.com	
Phone:	(602) 989-9992		

PROJECT INFORMATION

Project ID:	AZ1418.11		
Project Description:	Centenial - Bldg H		
Project Zip Code:	85044	Sampling Date/Time:	3/12/24 @ 12pm
PO Number:	316026	Sampled By:	TLC

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

REQUESTED SERVICES

Non-Culturable: Spore Trap Analysis; Other biological particles - supplement; Direct Microscopic Exam (Qualitative); Quantitative spore count direct exam; Dust Characterization

Culturable: Spore Tape, BioCassette™ Andersen SAS, Soil,

1-Media Surface Fungi (Genus ID + *Asp.* sp.); Culturable Air Fungi (Genus ID + *Asp.* spp.); Gram Stain and Counts (Culturable Air and Surface); *Legionella* culture; Total Coliform, *E.coli* (Presence/Absence); QuantiTray-Sewage Screen; OTHER: (please specify test)

Other Requests: Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400); Asbestos Bulk - PLM (EPA method 600/R-93-116); Lead (Pb); PCR (please specify test); Allergens (please specify test)

003571465

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Asbestos Bulk - PLM (EPA method 600/R-93-116)
PLM 1-3	Orange Peel Drywall System (paint, texture, tape, joint comp. + drywall)	B	STD			X
PLM 4-6	Tac Board	B	STD			X
PLM 7-9	White 12" x 12" VCT + Mastic	B	STD			X

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Tracey Carpenter	3/13/24 @ 8AM	Kelley Lugo	3/13/24 8:10am

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.56; Kyrene Centennial Middle School - Bldg. H
EML ID: 4180260

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 08-12-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. H

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885963-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Glass Fibers 10% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-2, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885964-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Glass Fibers 10% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-3, New 2'x2' Ceiling Tile Lab ID-Version‡: 20885965-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	70% Glass Fibers 10% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM-4, Old 2'x2' Ceiling Tile Lab ID-Version‡: 20885966-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	80% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. H

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-5, Old 2'x2' Ceiling Tile Lab ID-Version‡: 20885967-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	80% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-6, Old 2'x2' Ceiling Tile Lab ID-Version‡: 20885968-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	80% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Gray Muli-Color Carpet Square and Mastic Lab ID-Version‡: 20885969-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Green Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-8, Gray Muli-Color Carpet Square and Mastic Lab ID-Version‡: 20885970-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Green Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. H

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-9, Gray Muli-Color Carpet Square and Mastic Lab ID-Version‡: 20885971-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Green Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-10, Blue Cove Base and Mastic Lab ID-Version‡: 20885972-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-11, Blue Cove Base and Mastic Lab ID-Version‡: 20885973-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-12, Blue Cove Base and Mastic Lab ID-Version‡: 20885974-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. H

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

Location: PLM-13, Orange Peel D.W. (paint, tex, tape, j.c., d.w) Lab ID-Version‡: 20885975-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-14, Orange Peel D.W. (paint, tex, tape, j.c., d.w) Lab ID-Version‡: 20885976-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-15, Orange Peel D.W. (paint, tex, tape, j.c., d.w) Lab ID-Version‡: 20885977-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.56; Kyrene Centennial Middle School - Bldg. H

Date of Sampling: 08-06-2025
Date of Receipt: 08-08-2025
Date of Report: 08-12-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Kayla Heinen

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

004180260

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.56		
Project Description:	Kyrene Centennial Middle School - Bldg. H		
Project Zip Code:		Sampling Date/Time:	8/6/2025
PO Number:	16812	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	New 2' X 2' Ceiling Tile	B	STD		
PLM 4-6	Old 2' X 2' Ceiling Tile	B	STD		
PLM 7-9	Gray Multi-Color Carpet Square and Mastic	B	STD		
PLM 10-12	Blue Cove Base and Mastic	B	STD		
PLM 13-15	Orange Peel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD		

SERVICES

	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quatitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp. spp.)	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and Surface Bacteria)	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3														X			
PLM 4-6														X			
PLM 7-9														X			
PLM 10-12														X			
PLM 13-15														X			

Other Requests

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME
Nick Marcos	8/8/2025


RECEIVED BY	DATE & TIME
Patty Lego	8/8/25 2:40pm

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

SECTION 10

♦

ASSUMED ACBM LOCATION MAPS

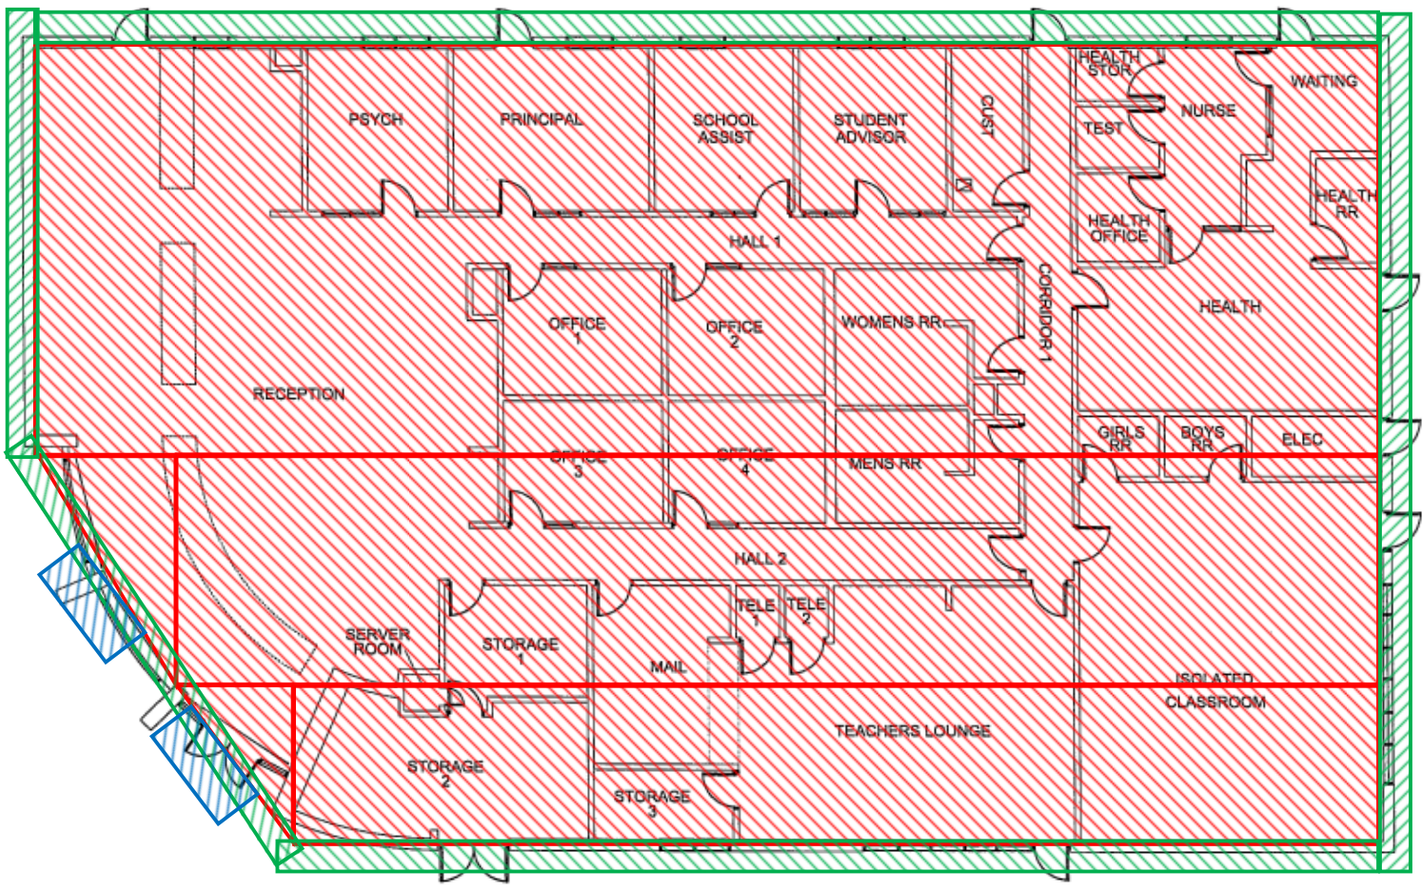

Assumed Asbestos-Containing Black Carpet Square & Mastic Interior/Exterior Caulking Window Glazing

Assumed Asbestos-Containing Brick & Mortar


Assumed Asbestos-Containing Glass Block Mortar

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Admin Building

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

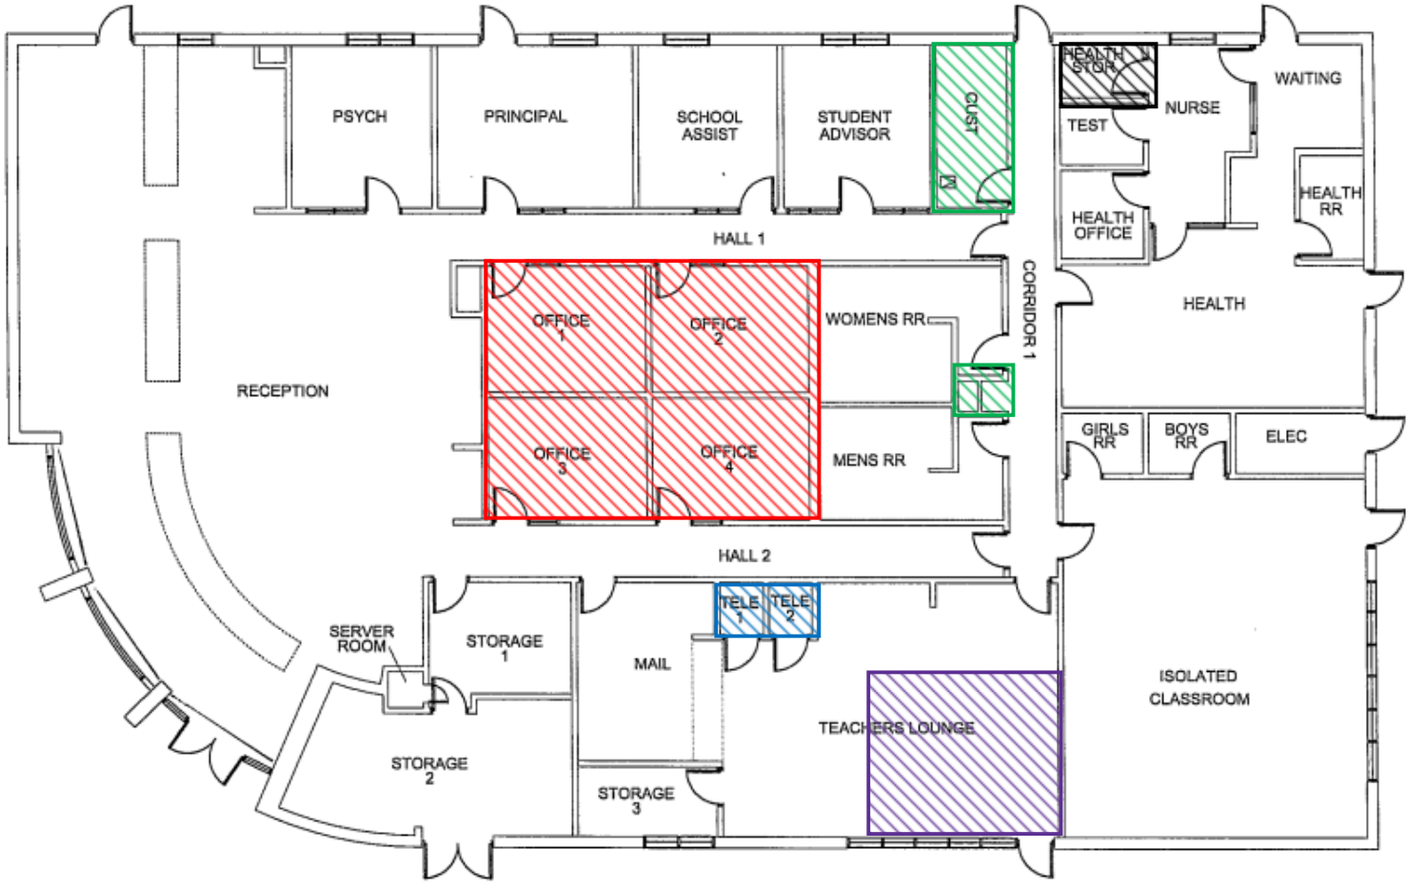

Assumed Asbestos-Containing Tacboard & Mastic

Assumed Asbestos-Containing FRP & Mastic
Brown Cove Base & Mastic
Knockdown Drywall

Assumed Asbestos-Containing Gray Wallpaper

Assumed Asbestos-Containing Black Sink Coating


Assumed Asbestos-Containing Tan Striped Wallpaper

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Admin Building

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

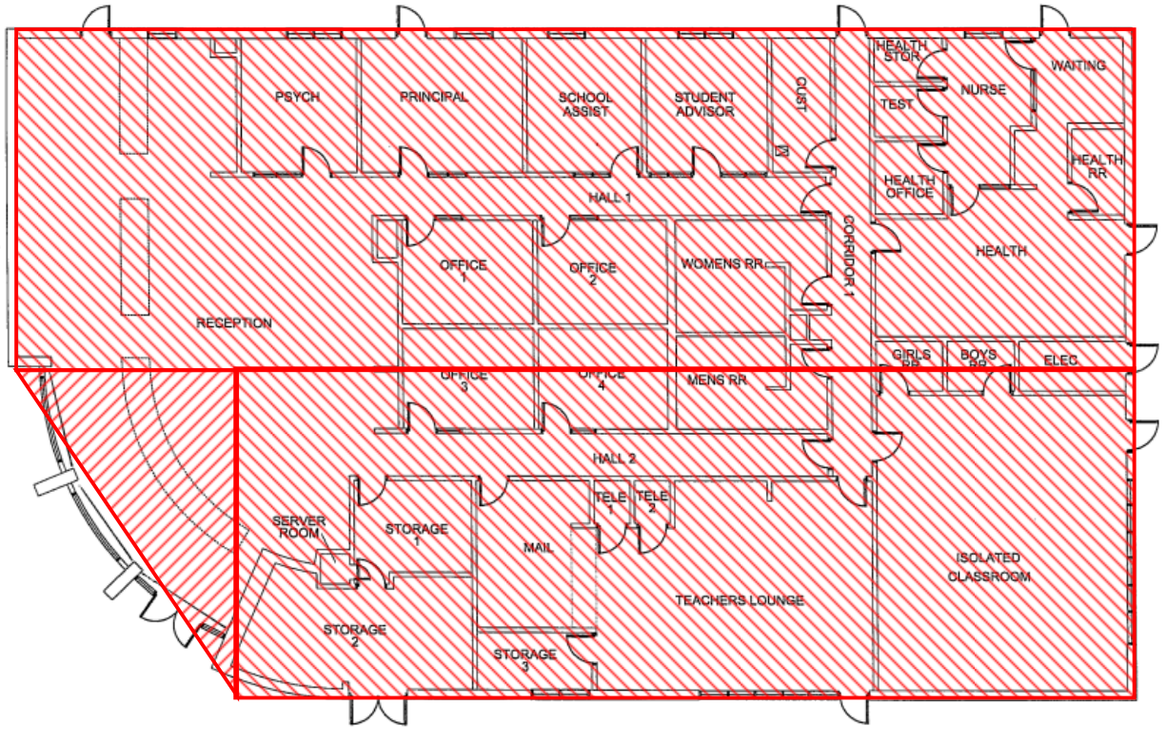


Assumed Asbestos-Containing
Large Pipe Wrap & Mastic
Small Pipe Wrap & Mastic
Black Pipe Insulation Foam
Silver Box Duct Wrap
Silver Duct Wrap
Silver Flex Duct Wrap
White Duct Seam Tape & Mastic
Unfinished Drywall System
Silver Duct Tape

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Admin Building

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

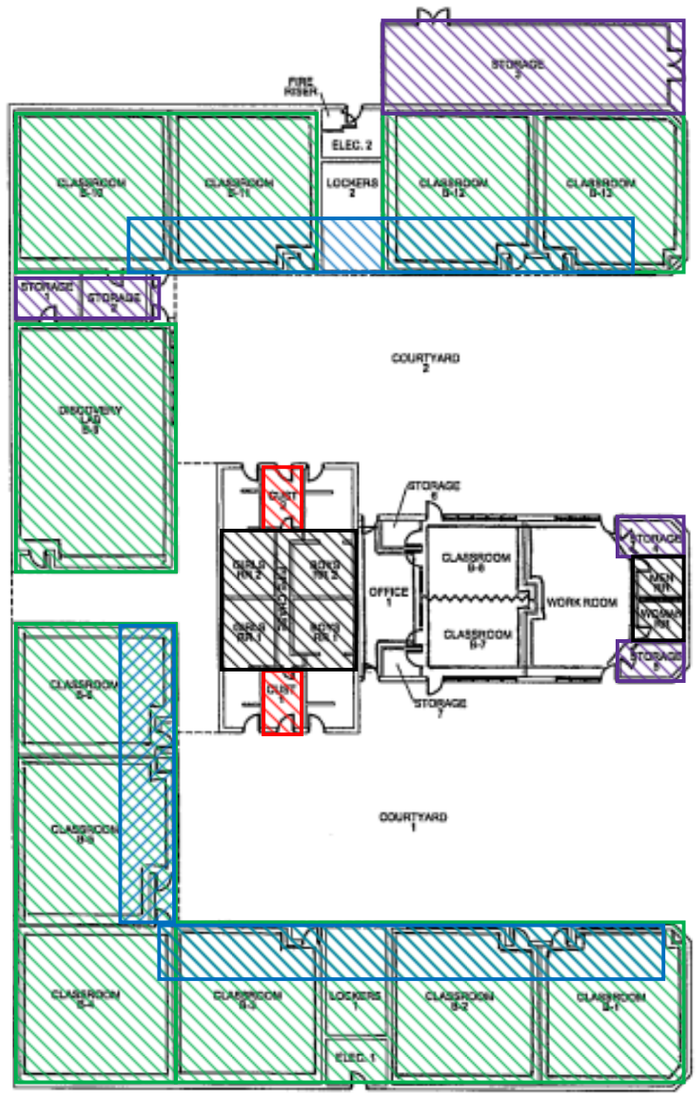

N

Assumed Asbestos-Containing
FRP & Mastic
Brown Cove Base & Mastic

Assumed Asbestos-Containing
Tacboard & Mastic
Black Sink Coating

Assumed Asbestos-Containing
Black Entry Carpet & Mastic

Assumed Asbestos-Containing
White w. Black 12"x 12" VCT
(Mastic)


Assumed Asbestos-Containing
White 2"x2" Ceramic Floor Tile
Peach 2"x2" Ceramic Floor Tile
Blue 2"x2" Ceramic Floor Tile
Off-White 4"x4" Ceramic Floor Tile
Peach 4"x4" Ceramic Floor Tile
(Grout & Thinset)
Fixture Caulking

PLM Sample Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building B

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

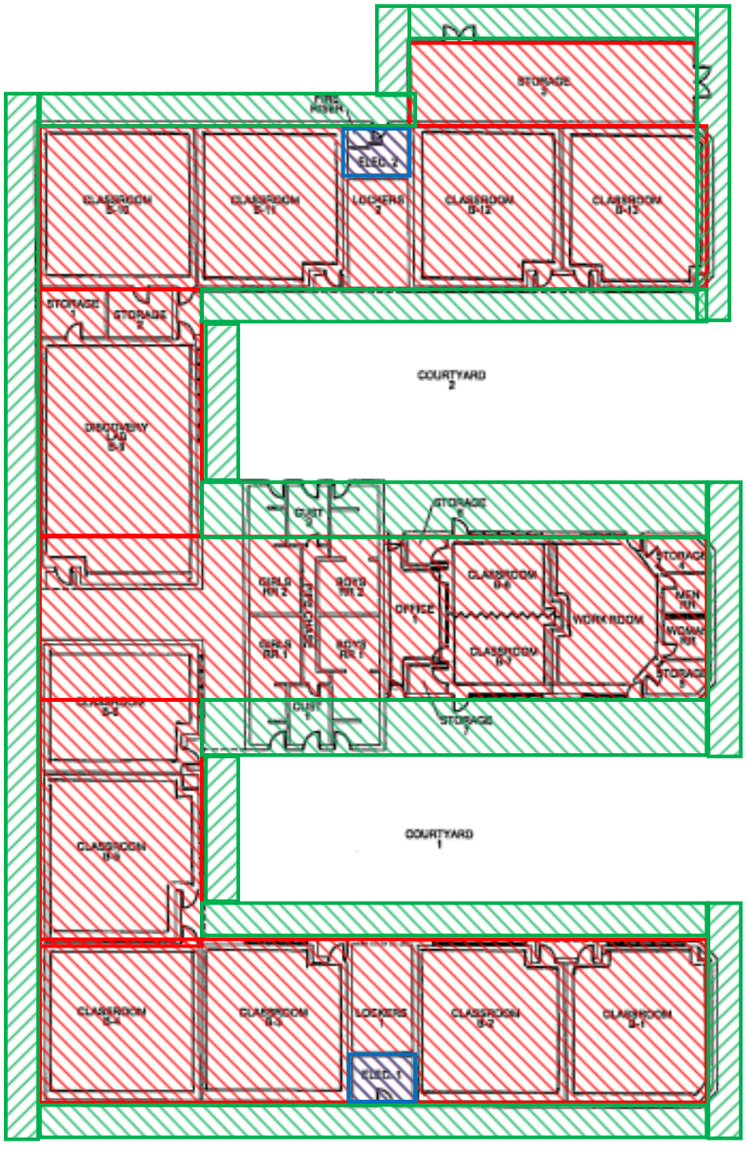

N

Assumed Asbestos-Containing
Silver Box Duct Wrap
Silver Duct Wrap
Silver Flex Duct Wrap
White Duct Tape
Mastic for Duct Tape
Large Pipe Wrap
Mastic for Pipe Wrap
Small Pipe Wrap
Mastic for Pipe Wrap
Unfinished Drywall System
Interior/Exterior Caulking

Assumed Asbestos-Containing
Brick & Mortar
Expansion Joint


Assumed Asbestos-Containing
Knockdown Drywall

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building B

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

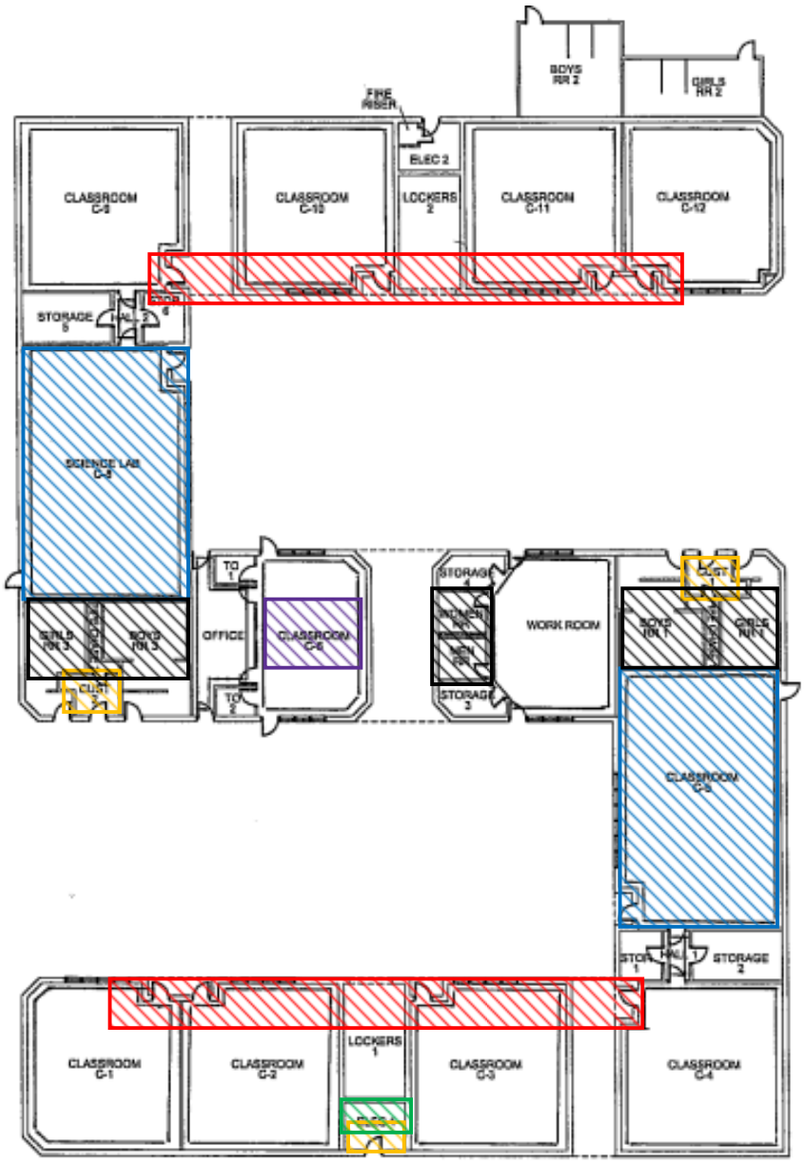

N

Assumed Asbestos-Containing
Black Entry Carpet & Mastic

Assumed Asbestos-Containing
FRP & Mastic
Brown Cove Base & Mastic

Assumed Asbestos-Containing
Knockdown Drywall

Assumed Asbestos-Containing
Black Counter Tops

Assumed Asbestos-Containing Divider Wall


Assumed Asbestos-Containing
White 2" x 2" Ceramic Floor Tile
Peach 2" x 2" Ceramic Floor Tile Blue 2" x 2" Ceramic Floor Tile Off-white 4" x 4" Ceramic Floor Tile Peach 4" x 4" Ceramic Floor Tile
(Grout, Thinset, & Mastic)
Fixture Caulking

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building C

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

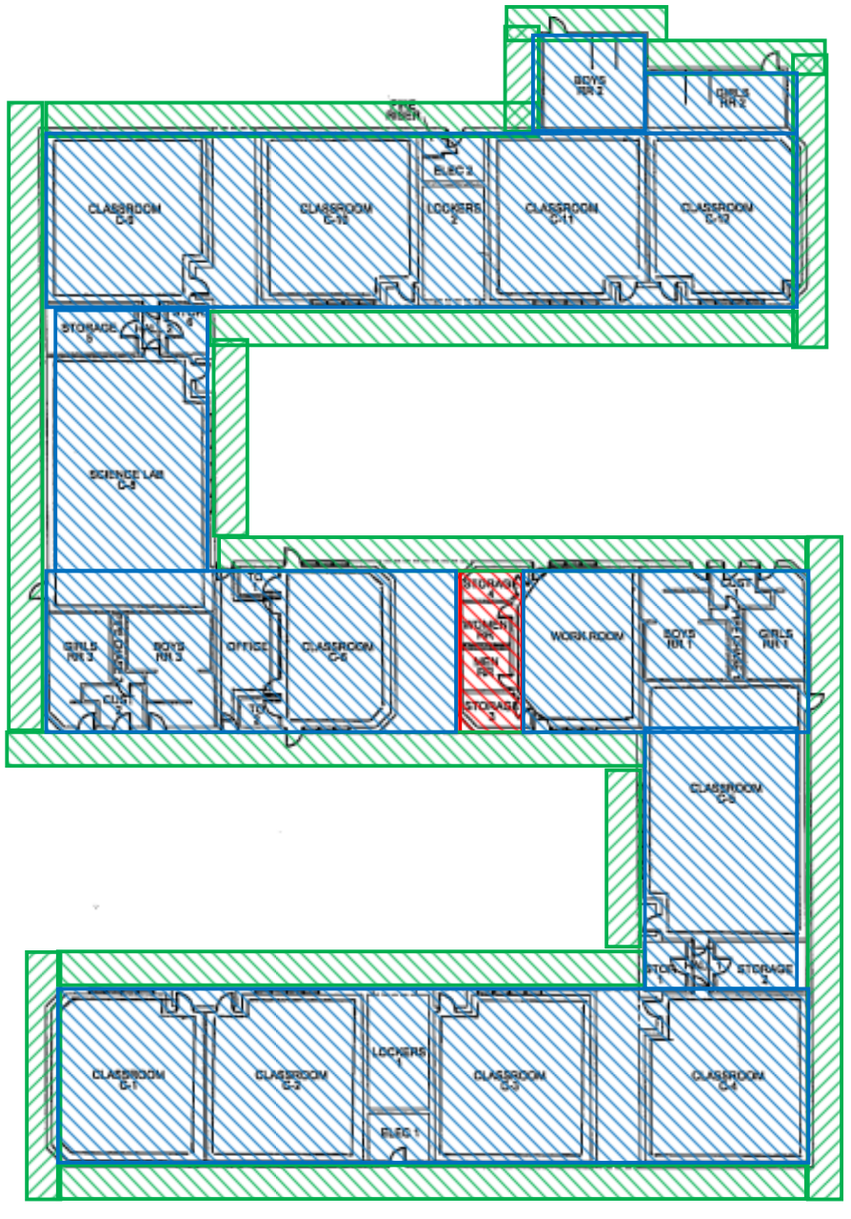

N

Assumed Asbestos-Containing
White w. Black 12" x 12" VCT (Mastic)

Assumed Asbestos-Containing
Brick
Mortar for Brick
Expansion Joint


Assumed Asbestos-Containing
Silver Box Duct Wrap
Silver Duct Wrap
Silver Flex Duct Wrap
White Duct Tape & Mastic
Large Pipe Wrap & Mastic
Small Pipe Wrap & Mastic
Unfinished Drywall System
Interior Caulking
Exterior Caulking
Tacboard & Mastic
Black Sink Coating

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building C

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

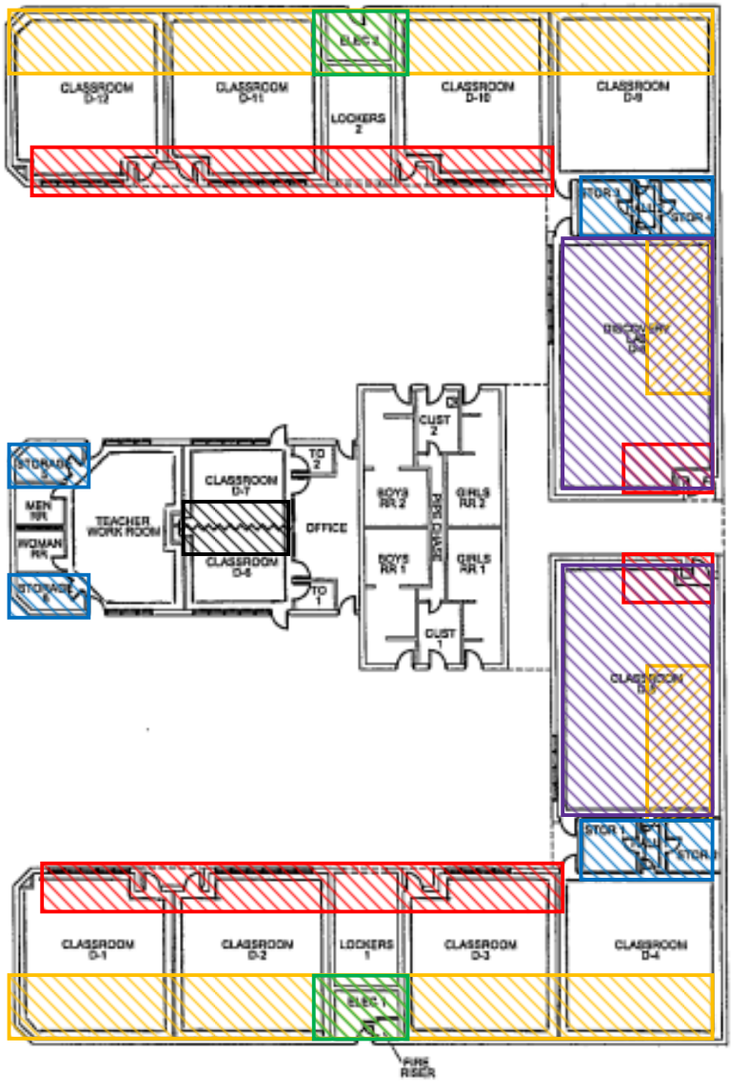

N

Assumed Asbestos-Containing Black Entry Carpet & Mastic

Assumed Asbestos-Containing Black Sink Coating

Assumed Asbestos-Containing Knockdown Drywall

Assumed Asbestos-Containing White w. Black 12" x 12" VCT (Mastic) Brown Cove Base & Mastic

Assumed Asbestos-Containing Black Counter Tops


Assumed Asbestos-Containing Divider Wall

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building D

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

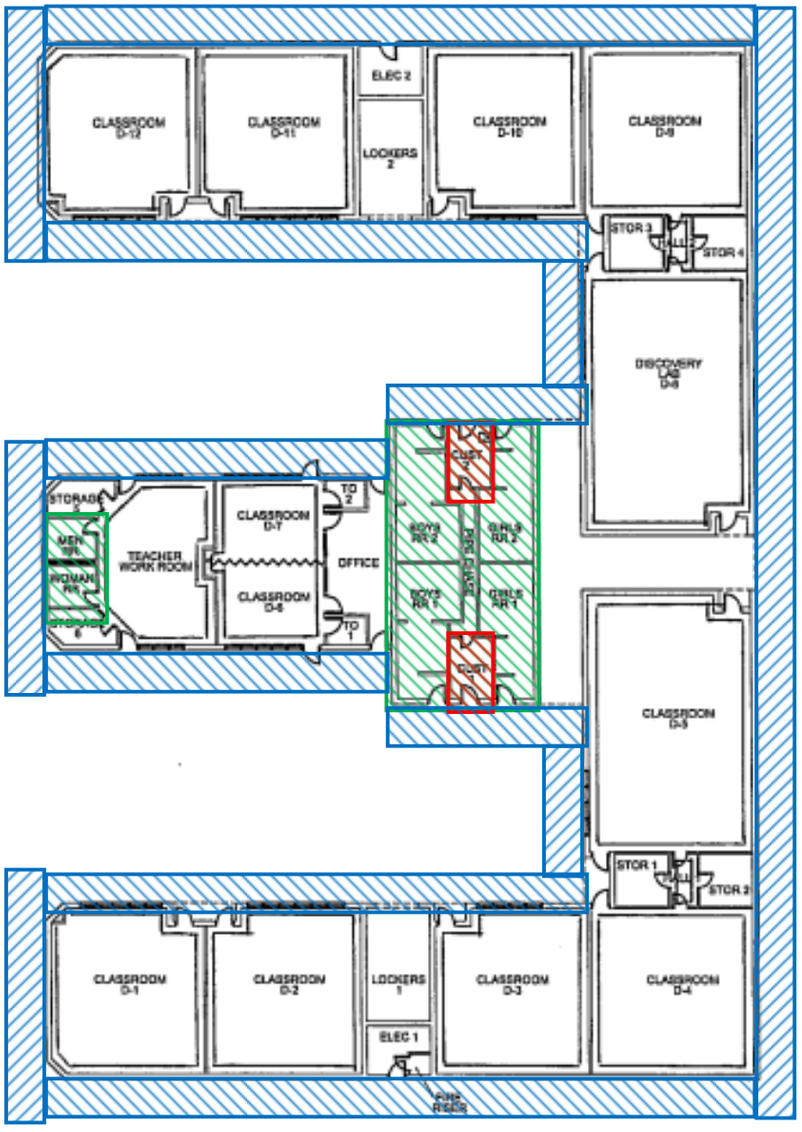

N

Assumed Asbestos-Containing
FRP & Mastic

Assumed Asbestos-Containing
White 2" x 2" Ceramic Floor Tile
Peach 2" x 2" Ceramic Floor Tile
Blue 2" x 2" Ceramic Floor Tile
Off-White 4" x 4" Ceramic Wall Tile
Peach 4" x 4" Ceramic Wall Tile
(Grout, Thinset, & Mastic)
Fixture Caulking


Assumed Asbestos-Containing
Brick & Mortar
Expansion Joint

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building D

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

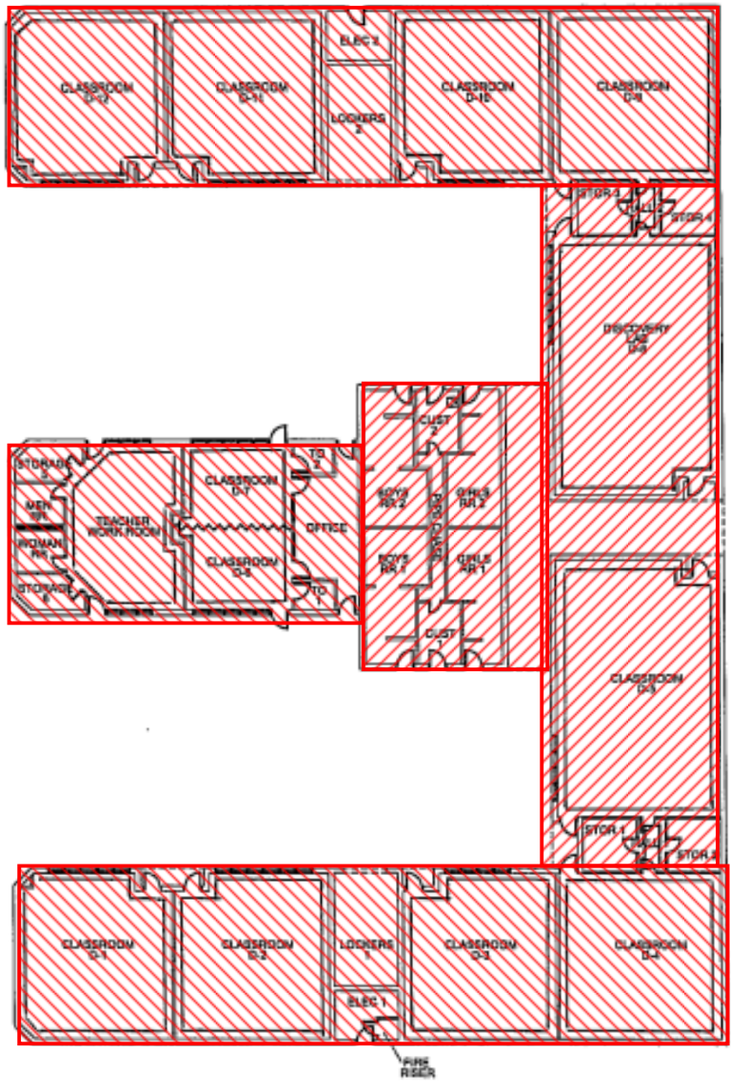

N


Assumed Asbestos-Containing
Silver Box Duct Wrap
Silver Duct Wrap
Silver Flex Duct Wrap
White Duct Tape & Mastic
Large Pipe Wrap & Mastic
Small Pipe Wrap & Mastic
Unfinished Drywall System
Interior/Exterior Caulking

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building D

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

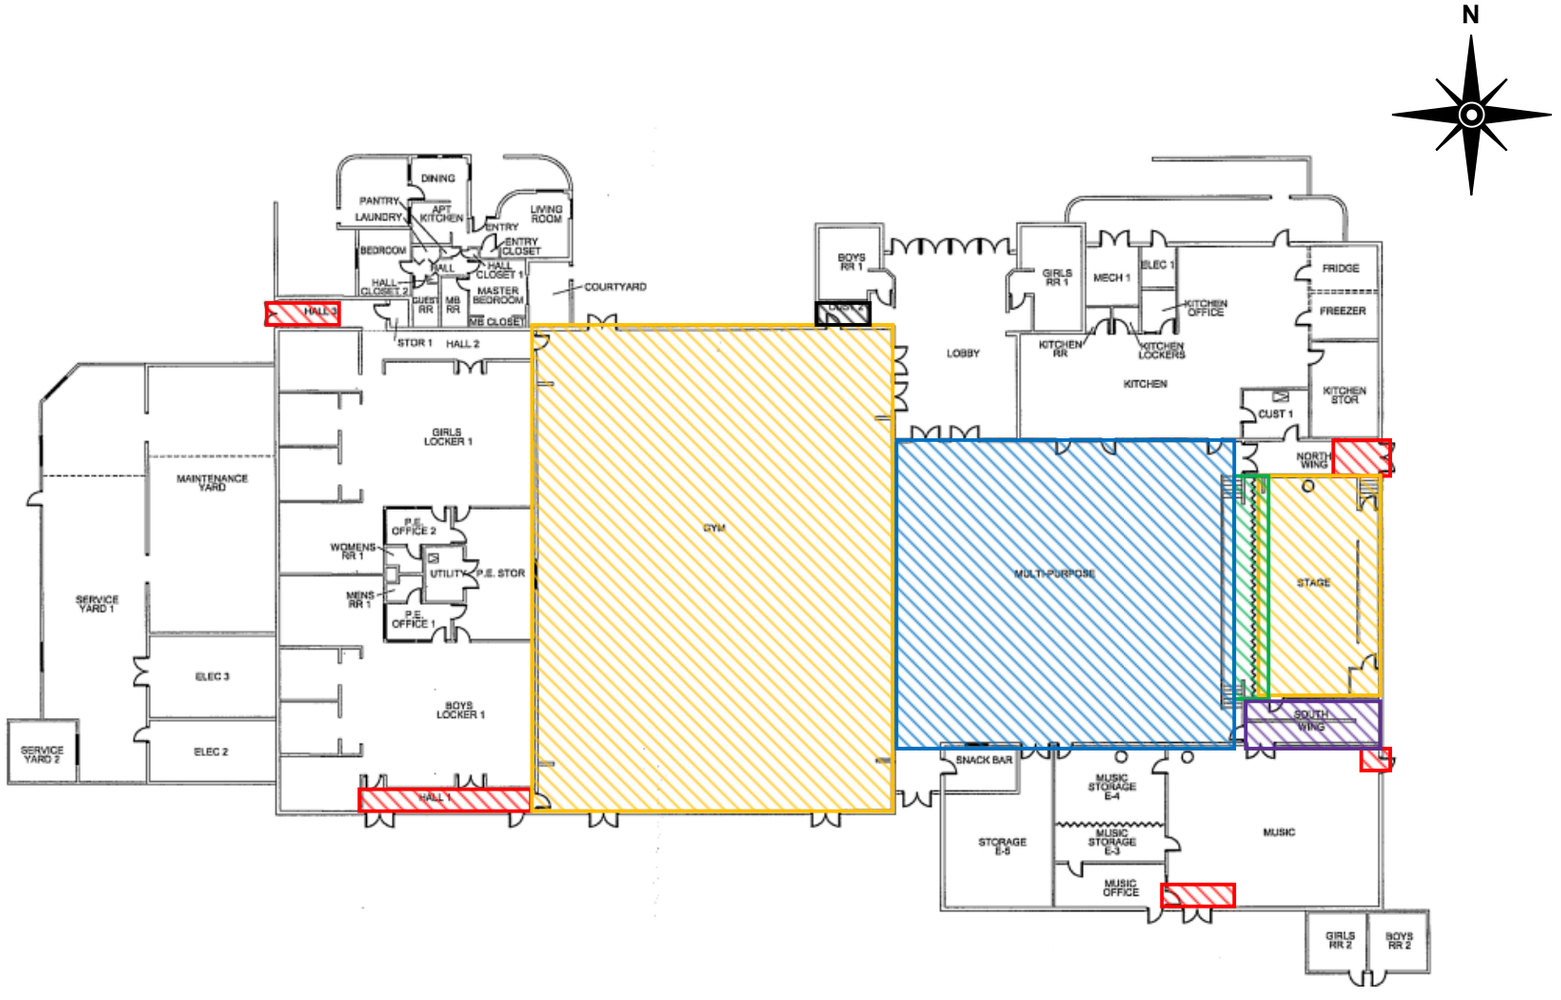

Assumed Asbestos-Containing Black Entry Carpet & Mastic

Assumed Asbestos-Containing Black L Shaped Cove Base (Mastic)

Assumed Asbestos-Containing Divider Wall

Assumed Asbestos-Containing Black 6" Cove Base & Mastic

Assumed Asbestos-Containing Blue 6" Cove Base & Mastic White w/ Gray 12" X 12" VCT (Mastic)


Assumed Asbestos-Containing Gray Speckled 12" x 12" VCT (Mastic)

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building E

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

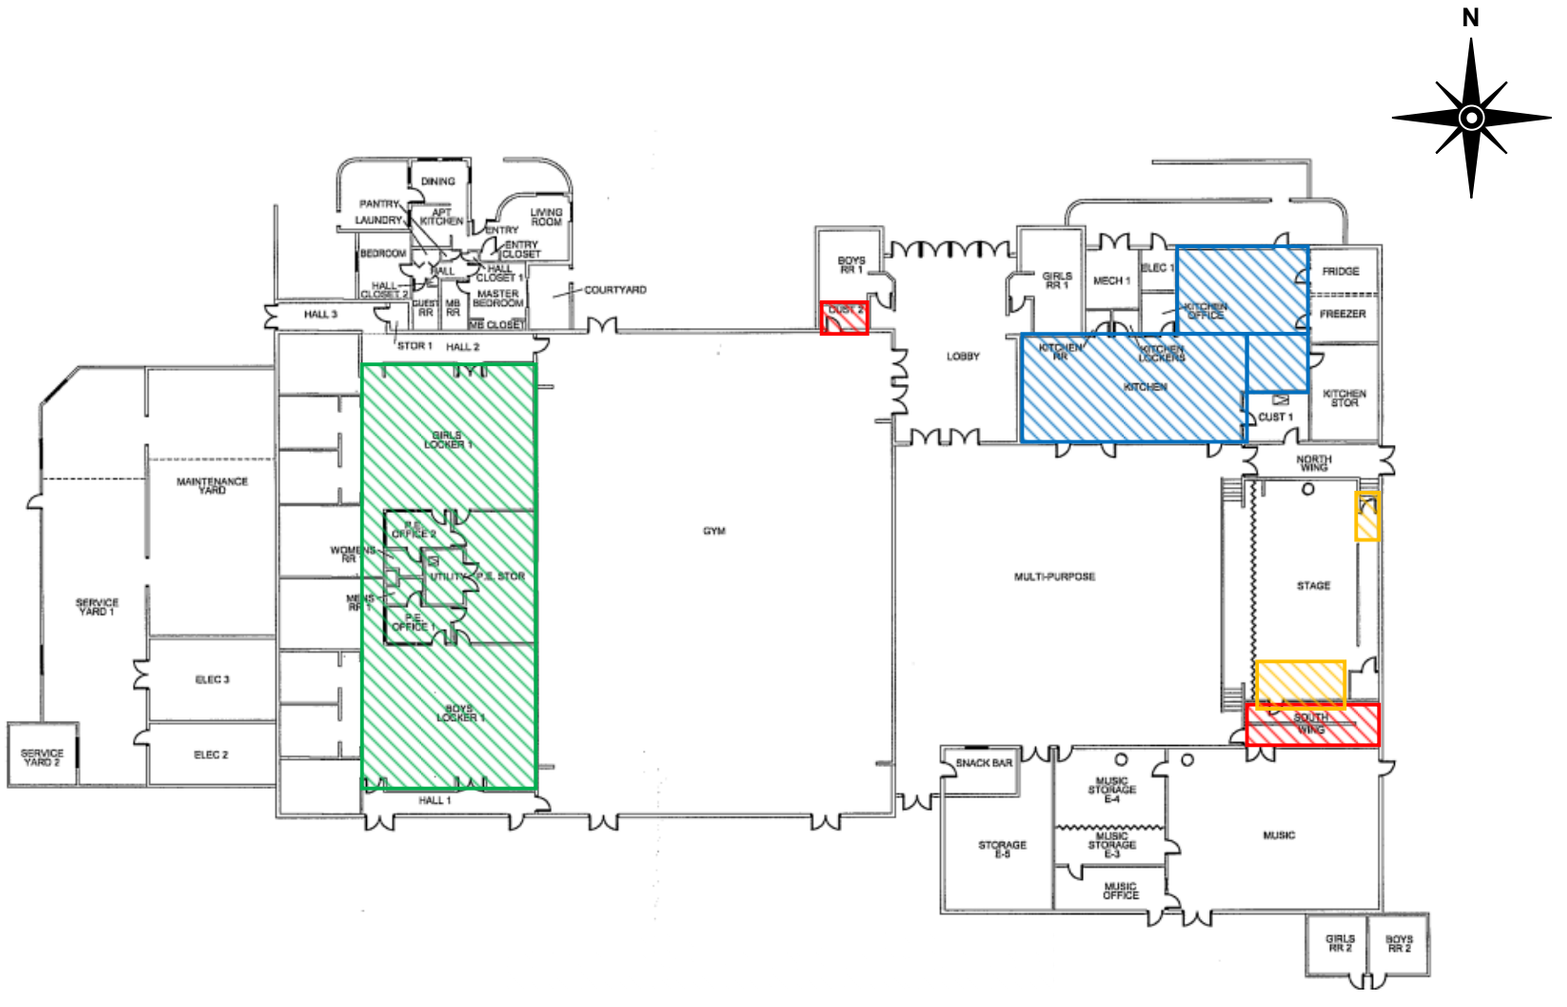

Assumed Asbestos-Containing
Old FRP & Mastic

Assumed Asbestos-Containing
Brown 6" Cove Base & Mastic

Assumed Asbestos-Containing
Brown 4" Cove Base & Mastic


Assumed Asbestos-Containing
New FRP & Mastic
Brown 6" x 6" Ceramic Floor Tile
Brown 4" x 6" Ceramic Cove Base
(Grout, Thinset, and Mastic)
Drywall 2' x 4' Ceiling Tile

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building E

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

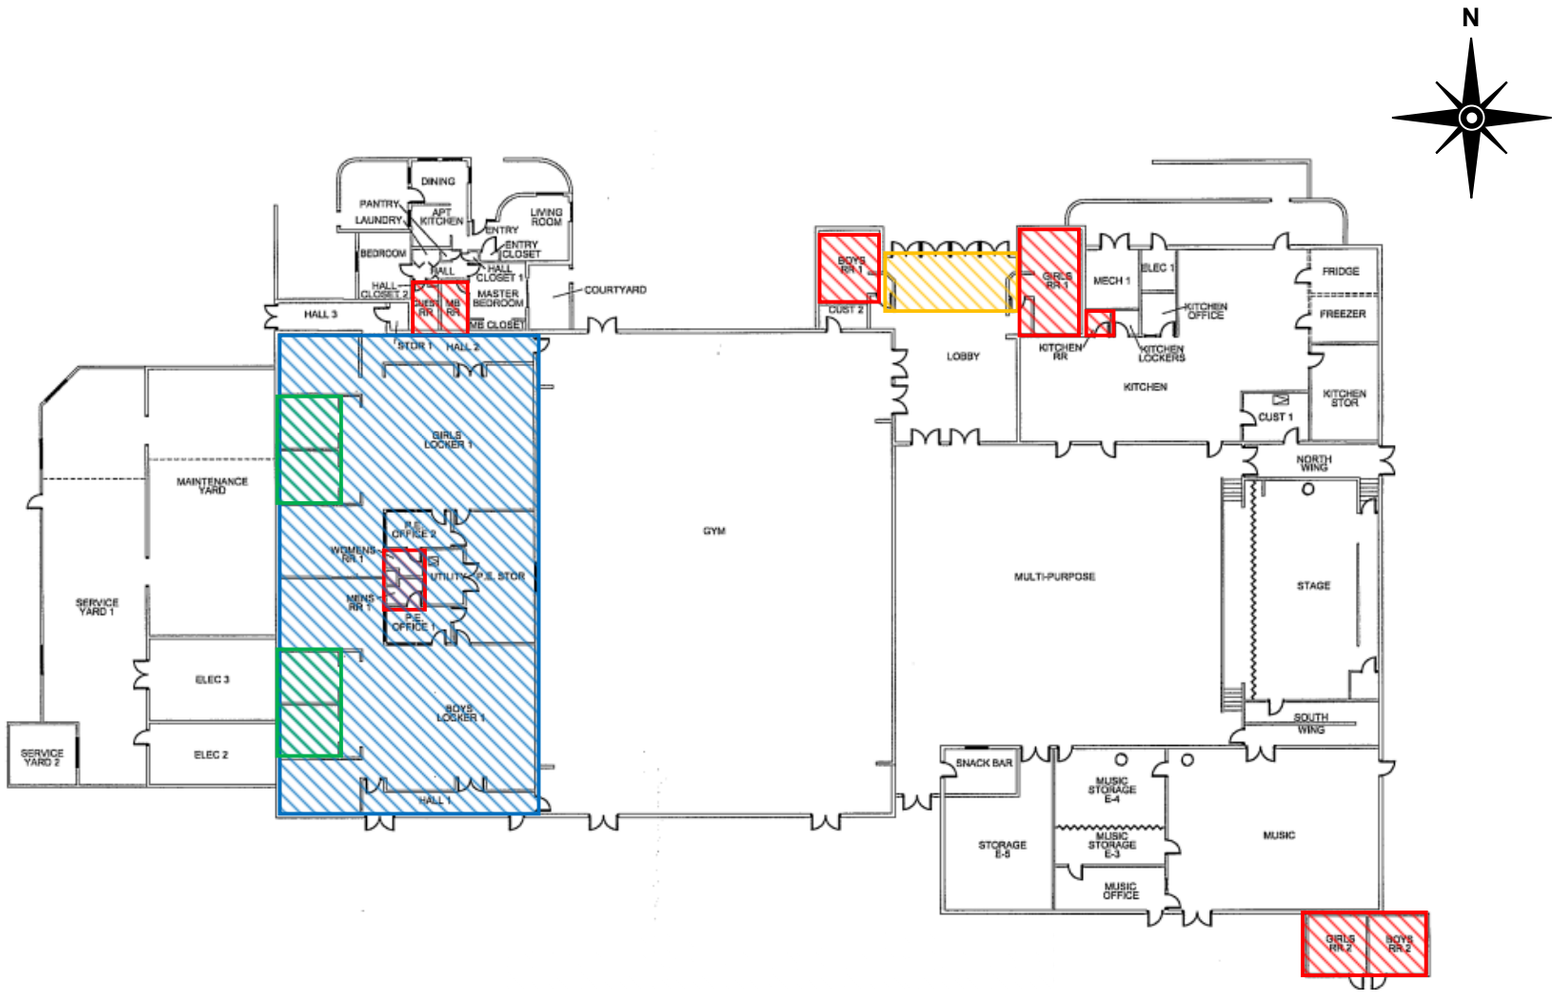

Assumed Asbestos-Containing
Fixture Caulking

Assumed Asbestos-Containing
Glass Block Mortar

Assumed Asbestos-Containing
Gray 6" x 6" Ceramic Floor Tile
(Grout & Thinset)


Assumed Asbestos-Containing
White w. Black 12" x 12" VCT
Black 4" Cove Base
White 4" x 4" Ceramic Wall Tile
Red 4" x 4" Ceramic Wall Tile
Black 4" x 4" Ceramic Wall Tile
Gray Floor Coating
Gray FRP
(Mastic)
Concrete Benches

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building E

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

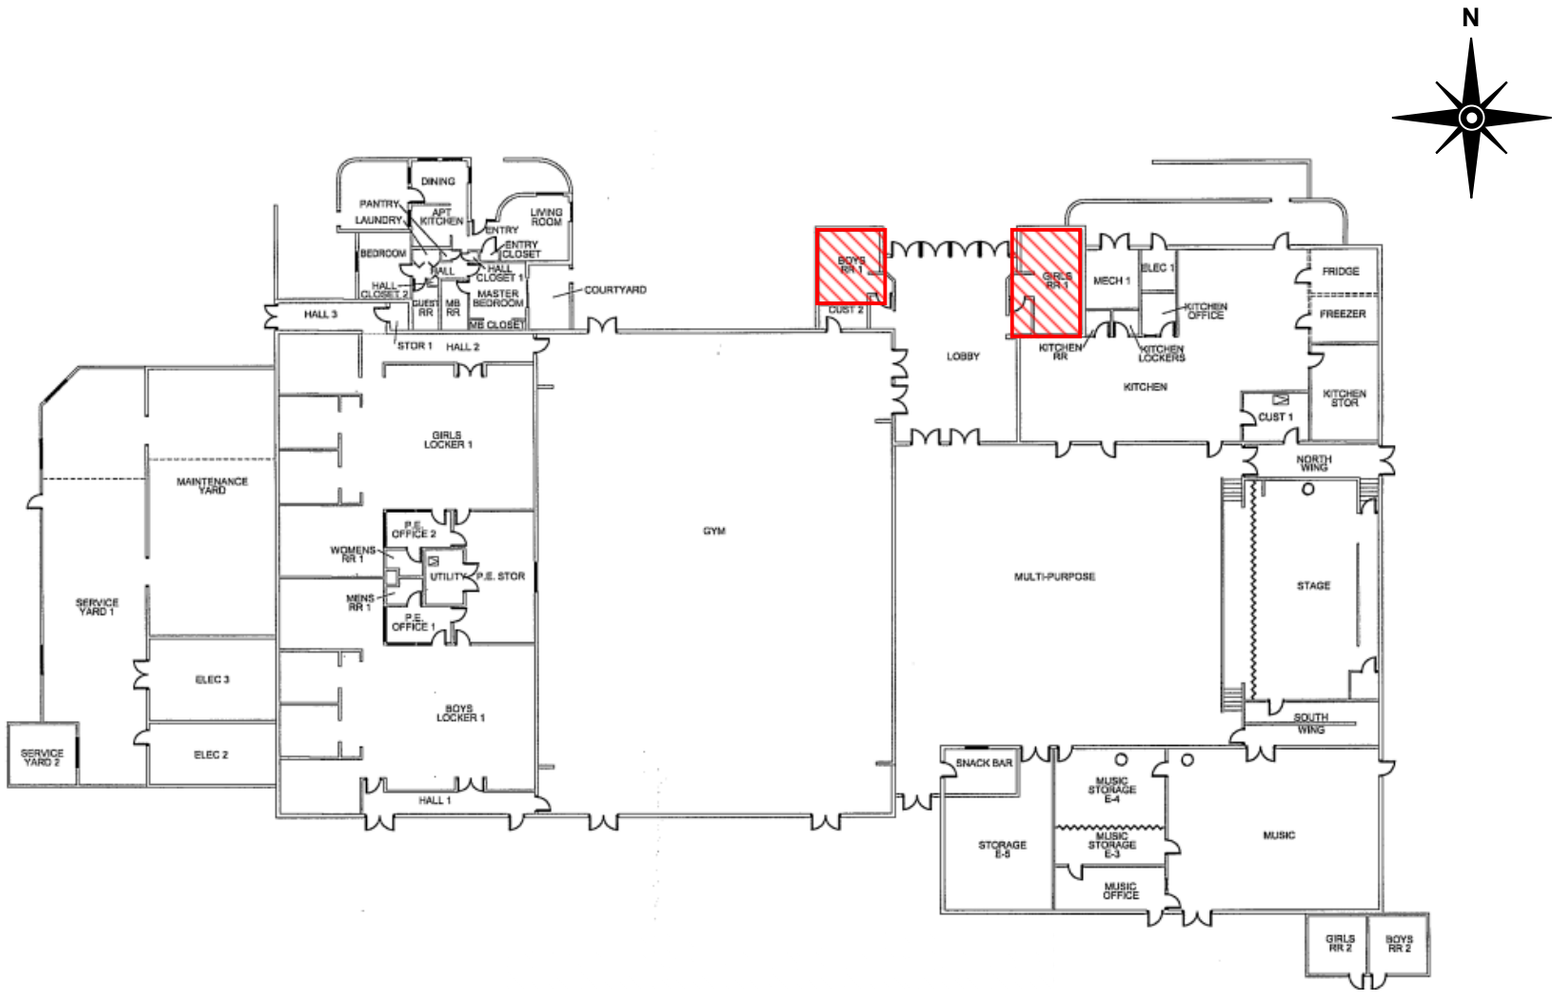


Assumed Asbestos-Containing
Green Speckled 2" x 2" Ceramic Floor Tile
Gray Speckled 2" x 2" Ceramic Floor Tile
Peach 4" x 4" Ceramic Wall Tile
Gray 4" x 4" Ceramic Wall Tile
(Grout & Thinset)

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building E

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

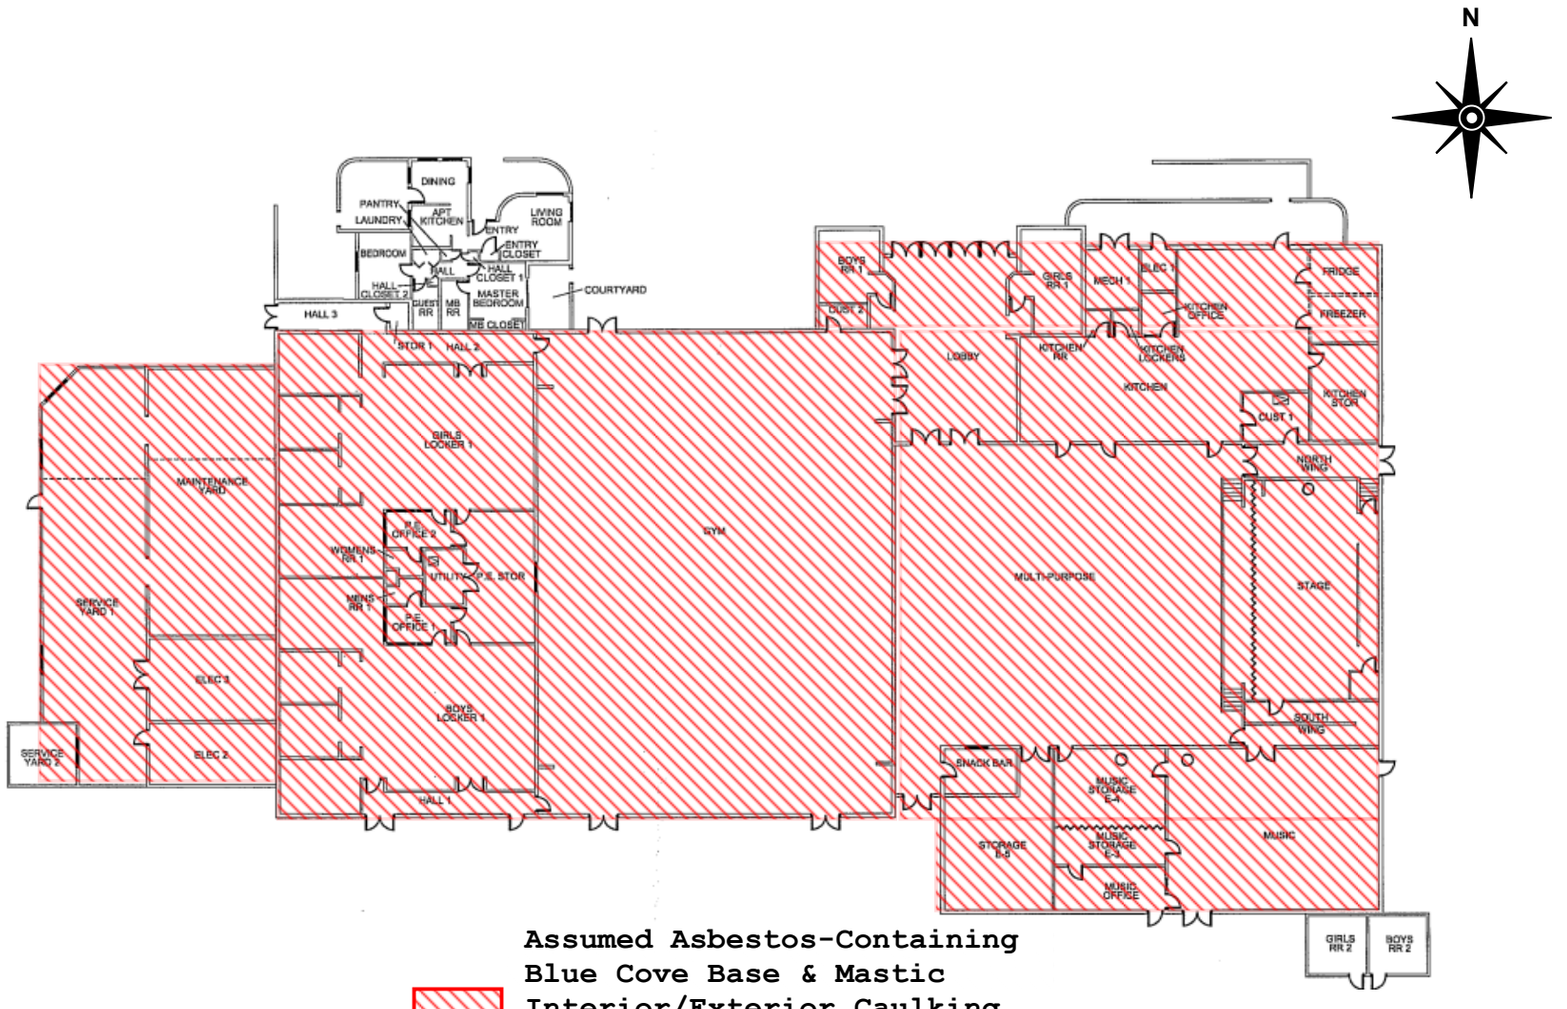


Assumed Asbestos-Containing
Blue Cove Base & Mastic
Interior/Exterior Caulking
Black Window Glazing
Polished Concrete & Expansion Joint
Silver Box Duct Wrap
Silver Duct Wrap
Silver Flex Duct Wrap
White Duct Tape & Mastic
Gray Duct Mastic
Large Pipe Wrap & Mastic
Small Pipe Wrap & Mastic
Unfinished Drywall
Black Sink Coating

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building E

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

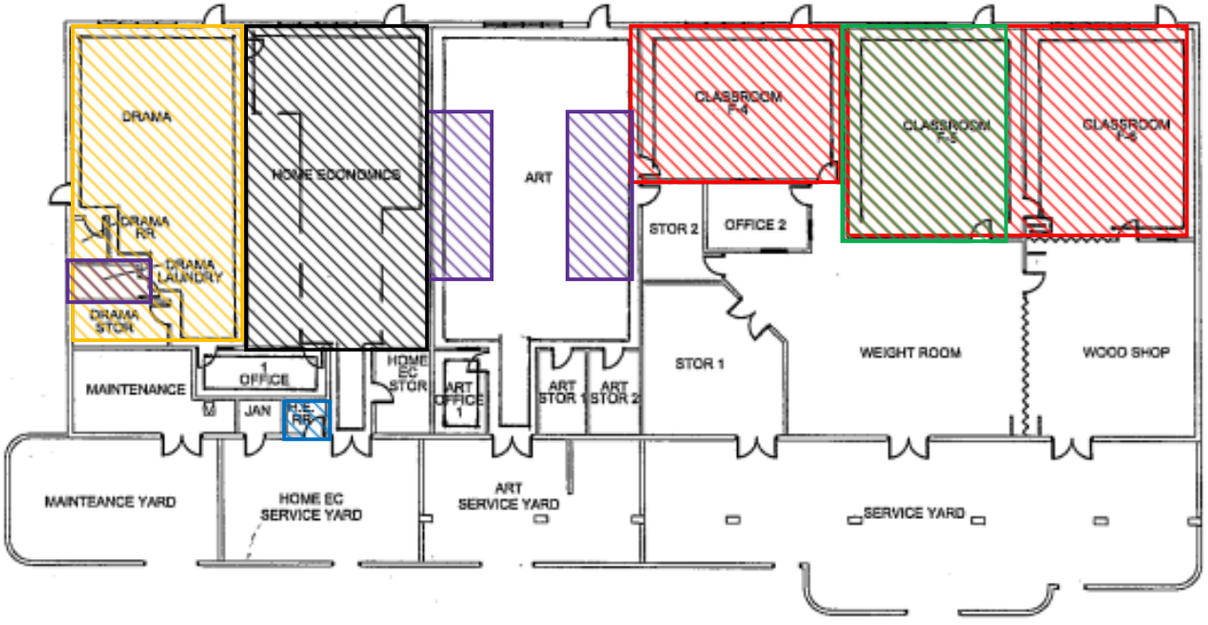

Assumed Asbestos-Containing Blue Cove Base & Mastic Tacboard & Mastic

Assumed Asbestos-Containing White w. Black 12" x 12" VCT Mastic Brown Cove Base & Mastic

Assumed Asbestos-Containing Black Rubber Gym Floor

Assumed Asbestos-Containing Fixture Caulking

Assumed Asbestos-Containing Gray Sink Coating


Assumed Asbestos-Containing Polished Concrete Floor Expansion

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building F

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

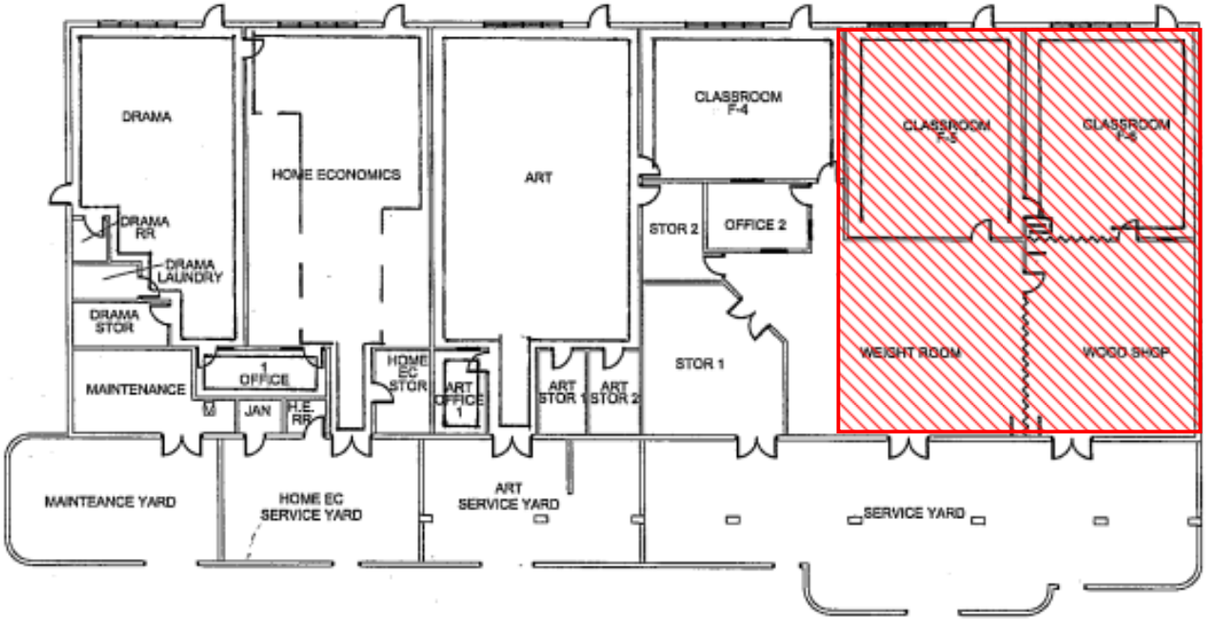

Assumed Asbestos-Containing
Black Cove Base & Mastic
Gray Wood Vinyl Flooring
Divider Wall

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building F

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415




Assumed Asbestos-Containing
Interior/Exterior Caulking
Black Window Glazing
Brick & Mortar
Expansion Joint
Large Pipe Wrap & Mastic
Small Pipe Wrap & Mastic
Black Pipe Foam Insulation
Silver Box Duct Wrap
Silver Duct Wrap
Silver Flex Duct Wrap
White Duct Tape & Mastic
Unfinished Drywall
Silver Duct Tape
Skylight Insulation Panel

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building F

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

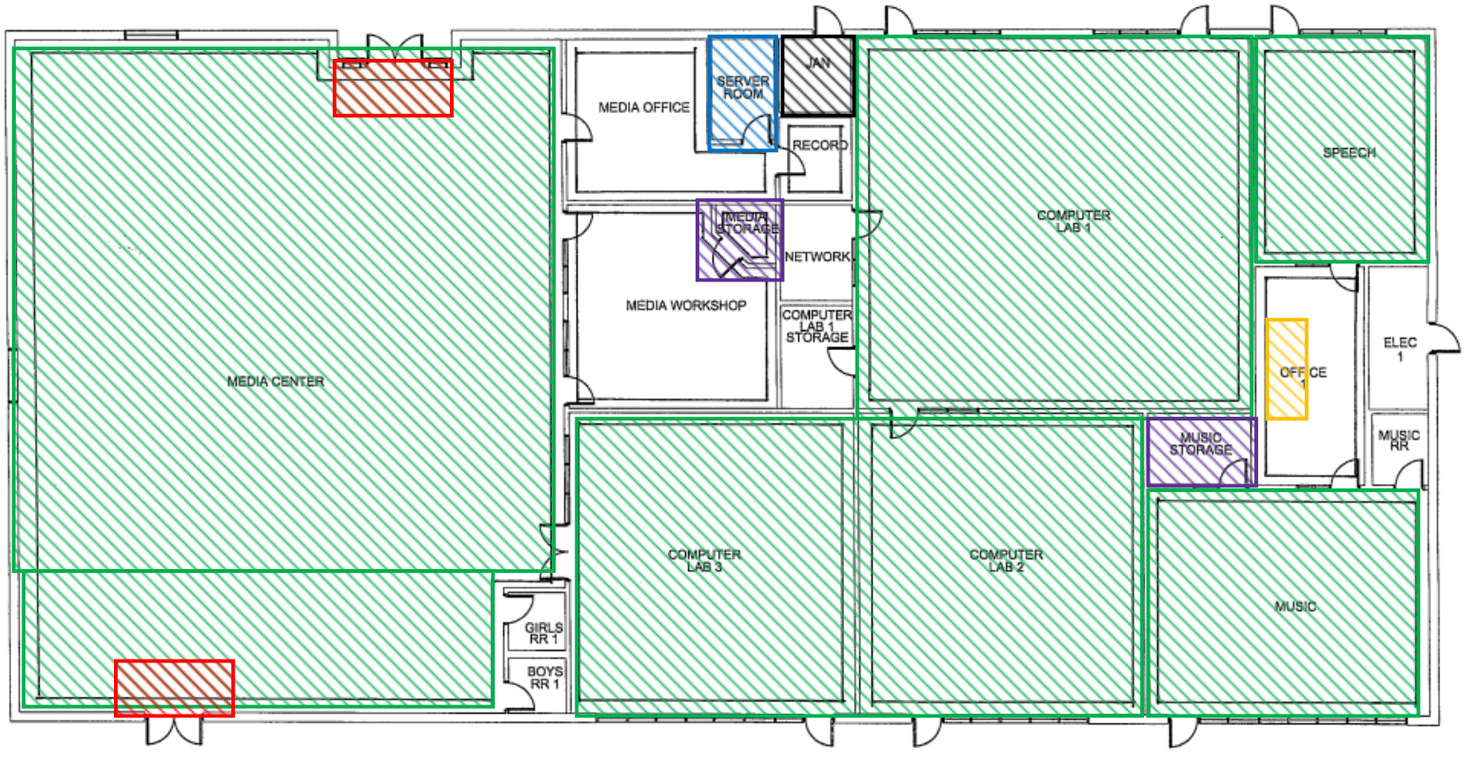

Assumed Asbestos-Containing
Black Entry Carpet
Glass Block Mortar

Assumed Asbestos-Containing
Black Sink Coating

Assumed Asbestos-Containing
Tacboard
Mastic for Tacboard

Assumed Asbestos-Containing
White w. Gray 12" x 12" VCT
(Mastic)

Assumed Asbestos-Containing
Gray Wallpaper
Brown Cove Base & Mastic


Assumed Asbestos-Containing
Knockdown Drywall

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building G

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

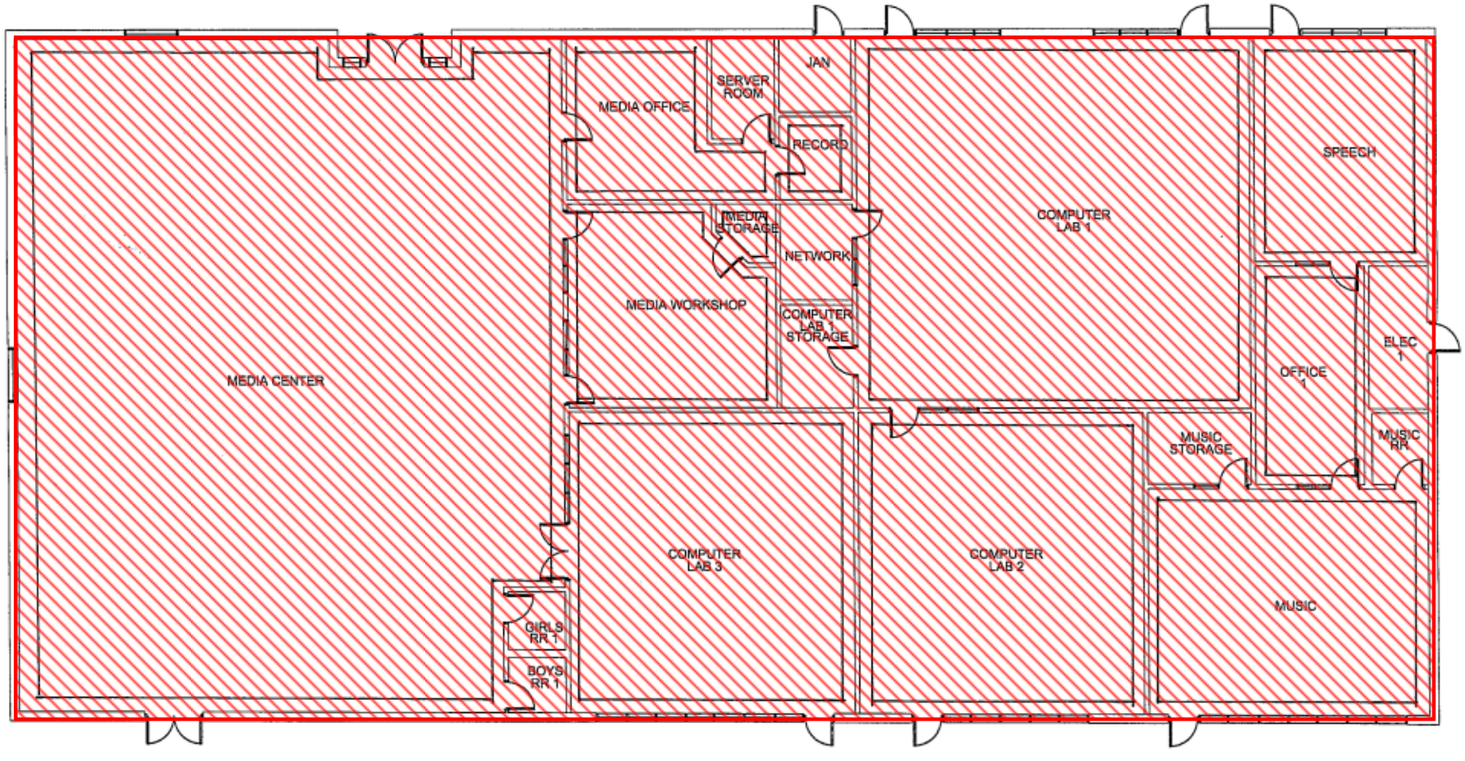


Assumed Asbestos-Containing
Blue Cove Base & Mastic
Interior/Exterior Caulking
Large Pipe Wrap & Mastic
Small Pipe Wrap & Mastic
Black Pipe Foam Insulation
Silver Box Duct Wrap
Silver Duct Wrap
Silver Flex Duct Wrap
White Duct Tape & Mastic
Unfinished Drywall
Silver Duct Tape
Skylight Insulation Panel

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building G

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

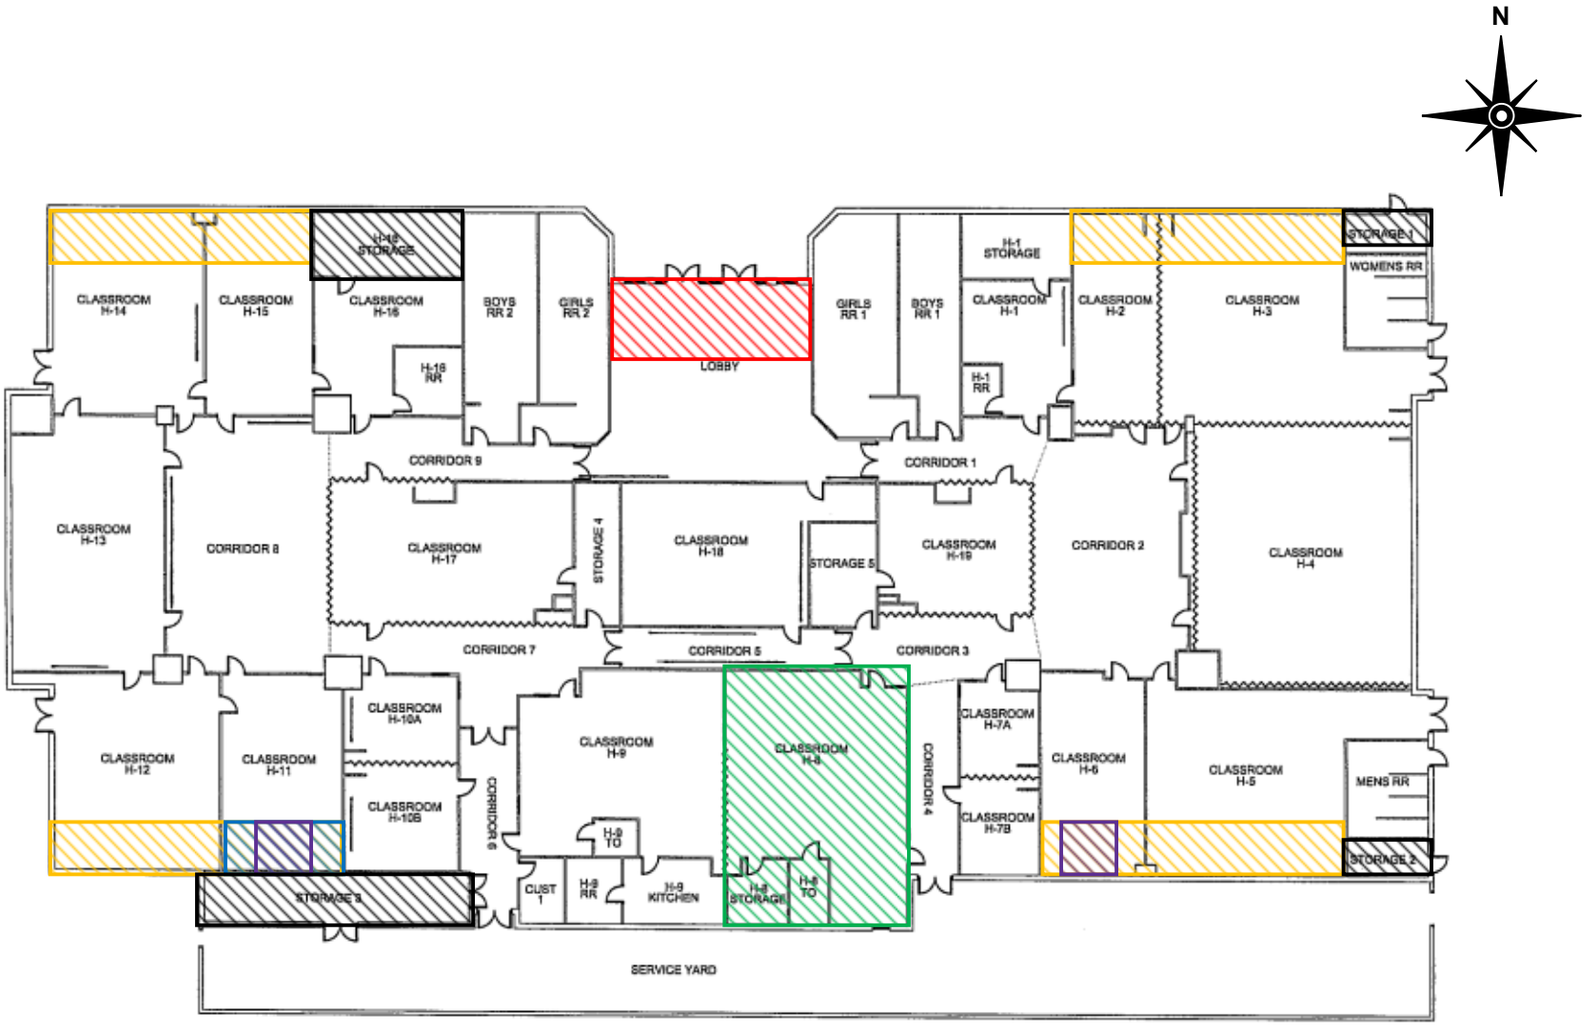

Assumed Asbestos-Containing Black Entry Carpet & Mastic Glass Block Mortar

Assumed Asbestos-Containing Black Sink Coating

Assumed Asbestos-Containing Gray Cove Base & Mastic

Assumed Asbestos-Containing White Sink Coating

Assumed Asbestos-Containing Fume Hood Panel


Assumed Asbestos-Containing Tan Speckled 12" x 12" VCT (Mastic)

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building H

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

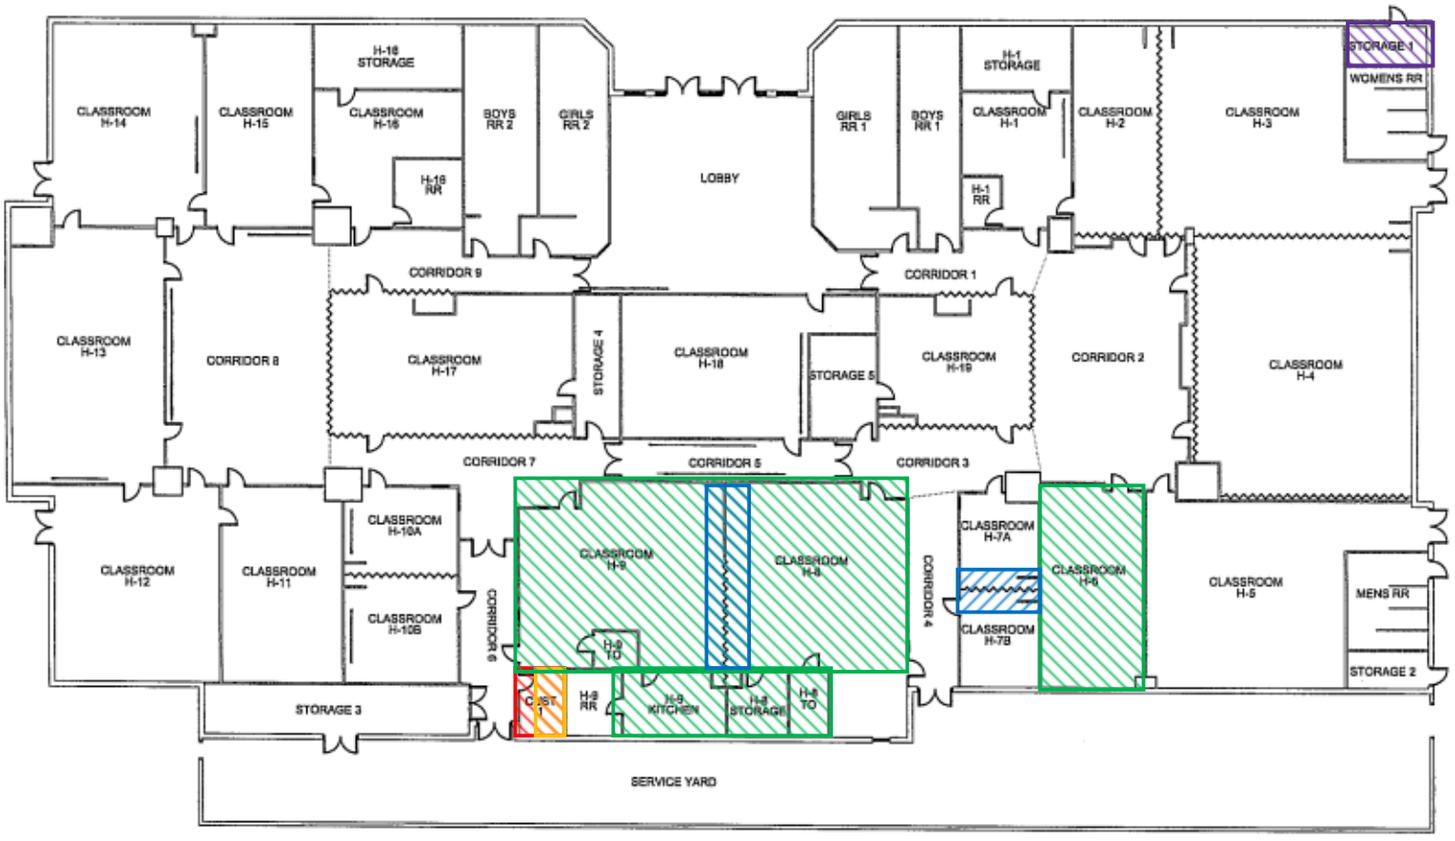

Assumed Asbestos-Containing FRP & Mastic

Assumed Asbestos-Containing Smooth Drywall

Assumed Asbestos-Containing White w. Gray 12" x 12" VCT (Mastic)

Assumed Asbestos-Containing Divider Wall


Assumed Asbestos-Containing Knockdown Drywall

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building H

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

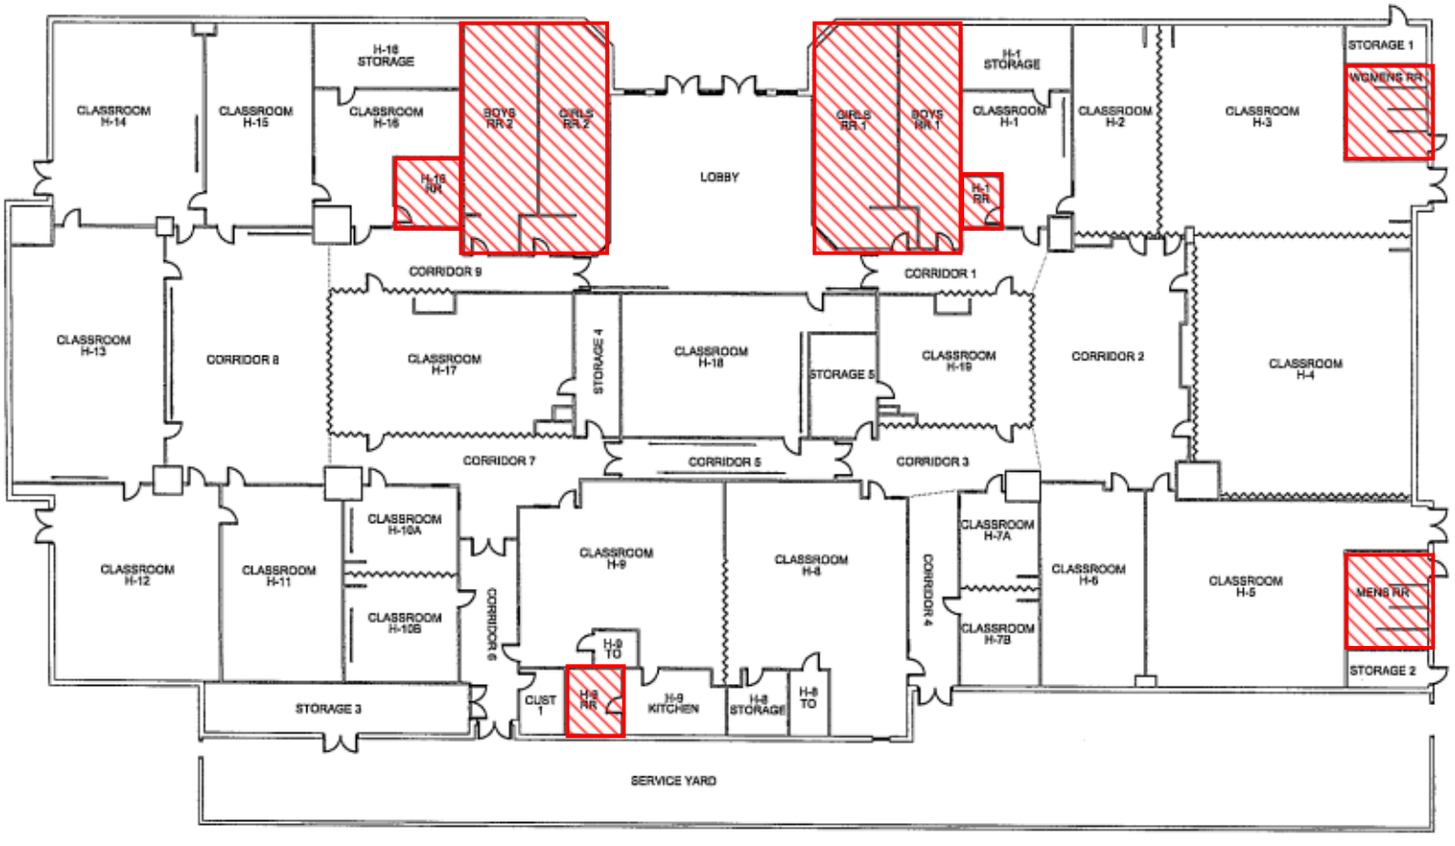


Assumed Asbestos-Containing
Off-White 4" x 4" Ceramic Wall Tile
Peach 4" x 4" Ceramic Wall Tile
Gray 4" x 4" Ceramic Wall Tile
Off-White 2" x 2" Ceramic Floor Tile
Green Speckled 2" x 2" Ceramic Floor Tile
Gray Speckled 2" x 2" Ceramic Floor Tile
(Grout, Thinset, & Mastic)
Fixture Caulking

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building H

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

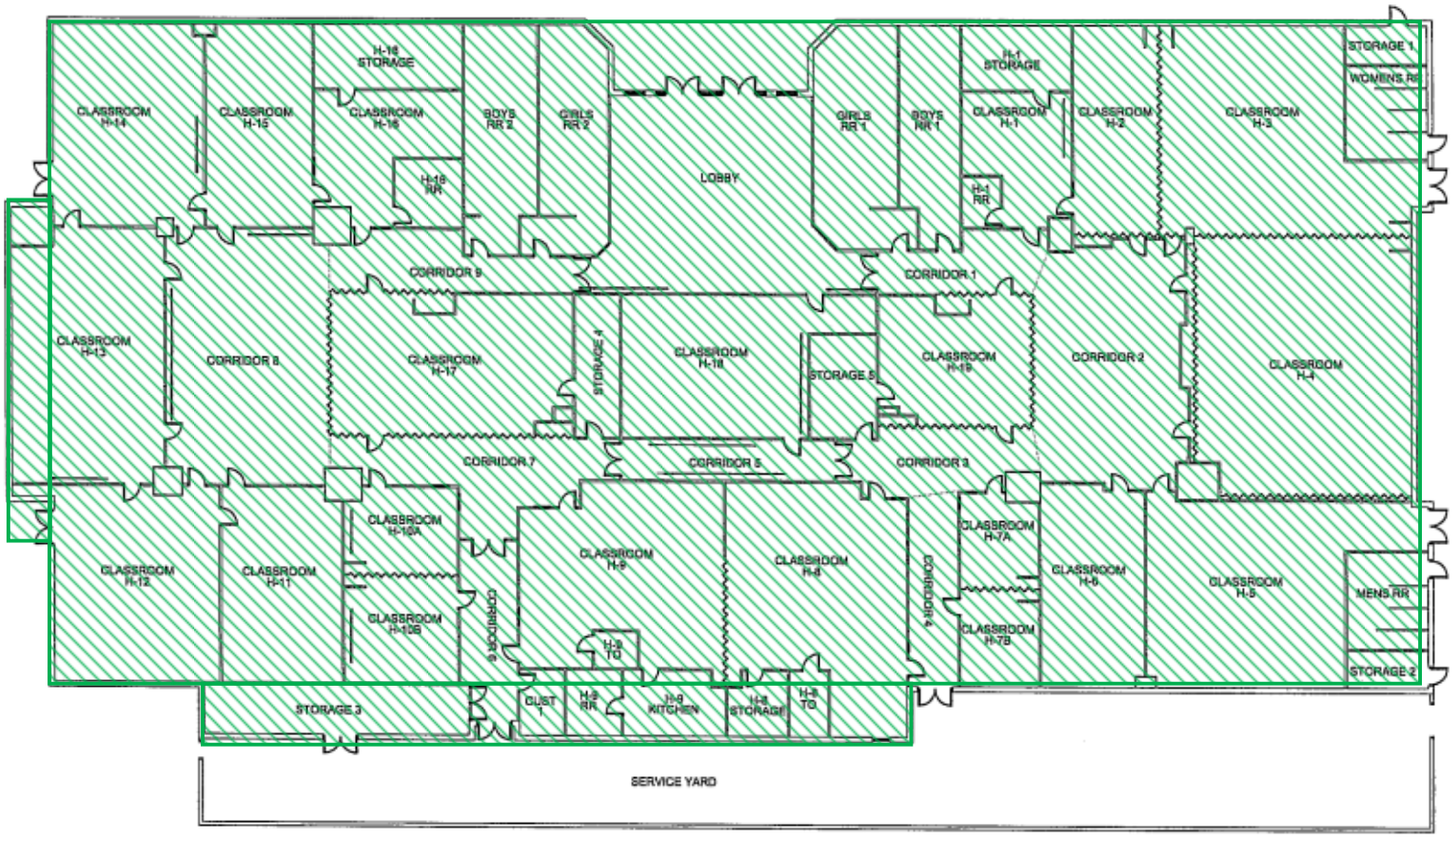

Assumed Asbestos-Containing
Large Pipe Wrap & Mastic
Small Pipe Wrap & Mastic
Black Pipe Foam Insulation
Silver Box Duct Wrap
Silver Duct Wrap
Silver Flex Duct Wrap
White Duct Tape & Mastic
Unfinished Drywall
Silver Duct Tape
Skylight Insulation Panel
Interior/Exterior Caulking
Block & Mortar
Brick & Mortar
Tacboard & Mastic

N

Assumed Asbestos-Containing Material Location Map
Kyrene Centennial Middle School
13808 S. 36th Street, Phoenix, Arizona 85044

Project No. AZ1418.56

Building H

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

SECTION 11

♦

INSPECTOR ACCREDITATIONS

THE ASBESTOS INSTITUTE

Certifies that

Garth Backman

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

July 16, 2021

and successfully completed and passed the competency exam.

Certificate:
ON-4644-12304-071621

Date of Examination:
16-Jul-2021
Date of Expiration:
16-Jul-2022

William T. Cavness
Director

Approved Instructor

THE ASBESTOS INSTITUTE
20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

This training meets all requirements for asbestos certification under Toxic Substance Control Act Title II.

THE ASBESTOS INSTITUTE

Certifies that

Nicholas Marcos

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

March 24, 2022

and successfully completed and passed the competency exam.

Certificate:
ON-4644-8873-032422

Date of Examination:
24-Mar-2022
Date of Expiration:
24-Mar-2023

William T. Cavness
Director

Approved Instructor

THE ASBESTOS INSTITUTE
20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

This training meets all requirements for asbestos certification under Toxic Substance Control Act Title II.

THE ASBESTOS INSTITUTE

Certifies that

Tracey Carpenter

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

August 29, 2024

and successfully completed and passed the competency exam.

Certificate:
ON-188748-14588-082924

Date of Examination:
29-Aug-2024

Date of Expiration:
29-Aug-2025

William T. Cavness
Director

Approved Instructor

THE ASBESTOS INSTITUTE
20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

The person receiving this certificate has completed the requisite training for asbestos accreditation under TSCA Title II.

THE ASBESTOS INSTITUTE

Certifies that

Nicholas Marcos

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

March 13, 2025

and successfully completed and passed the competency exam.

Certificate:
ON-188748-8873-031325

Date of Examination:
13-Mar-2025
Date of Expiration:
13-Mar-2026

A. Zwanenburg
Director

Approved Instructor

THE ASBESTOS INSTITUTE
20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

FL Course # CRS228

The person receiving this certificate has completed the requisite training for asbestos accreditation under TSCA Title II.

SECTION 12

♦

LABORATORY ACCREDITATIONS

United States Department of Commerce
National Institute of Standards and Technology

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500031-0

Eurofins EMLab P&K

Phoenix, AZ

is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:

Asbestos Fiber Analysis

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).

2021-01-01 through 2021-12-31

Effective Dates

For the National Voluntary Laboratory Accreditation Program

National Voluntary Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

Eurofins EMLab P&K
1501 W. Knudsen Dr.
Phoenix, AZ 85027-1307
Mr. Dan Shelby
Phone: 623-298-1015
Email: dshelby@emlabpk.com
http://www.emlab.com

ASBESTOS FIBER ANALYSIS — NVLAP LAB CODE 500031-0

Bulk Asbestos Analysis

Code	*Description*
18/A01	EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples
18/A03	EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials

For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500031-0

Eurofins EMLab P&K

Phoenix, AZ

is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:

Asbestos Fiber Analysis

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).

2022-01-01 through 2022-12-31

Effective Dates

For the National Voluntary Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

Eurofins EMLab P&K
1501 W. Knudsen Dr.
Phoenix, AZ 85027-1307
Mr. Dan Shelby
Phone: 623-298-1015
Email: dan.shelby@eurofinset.com
http://www.emlab.com

ASBESTOS FIBER ANALYSIS — NVLAP LAB CODE 500031-0

Bulk Asbestos Analysis

Code	*Description*
18/A01	EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples
18/A03	EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials

For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500031-0

Eurofins EMLab P&K

Phoenix, AZ

is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:

Asbestos Fiber Analysis

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).

2024-01-01 through 2024-12-31

Effective Dates

For the National Voluntary Laboratory Accreditation Program

National Voluntary Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

Eurofins EMLab P&K
1501 W. Knudsen Dr.
Phoenix, AZ 85027-1307
Claudia Palermo
Phone: 856-334-1001
Email: claudia.palermo@et.eurofinsus.com
https://www.eurofinsus.com/environment-testing/built-environment/

ASBESTOS FIBER ANALYSIS — NVLAP LAB CODE 500031-0

Bulk Asbestos Analysis

Code	*Description*
18/A01	EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples
18/A03	EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials

For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500031-0

Eurofins EMLab P&K

Phoenix, AZ

is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:

Asbestos Fiber Analysis

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique on ISO/IEC 17025).

2025-01-01 through 2025-12-31

Effective Dates

For the National Voluntary Laboratory Accreditation Program

National Voluntary Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

Eurofins EMLab P&K
1501 W. Knudsen Dr.
Phoenix, AZ 85027-1307
Joshua Snyder
Phone: 800-651-4802
Email: joshua.snyder@et.eurofinsus.com
https://www.eurofinsus.com/environment-testing/built-environment/

ASBESTOS FIBER ANALYSIS — NVLAP LAB CODE 500031-0

Bulk Asbestos Analysis

Code	*Description*
18/A01	EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples
18/A03	EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials

For the National Voluntary Laboratory Accreditation Program