


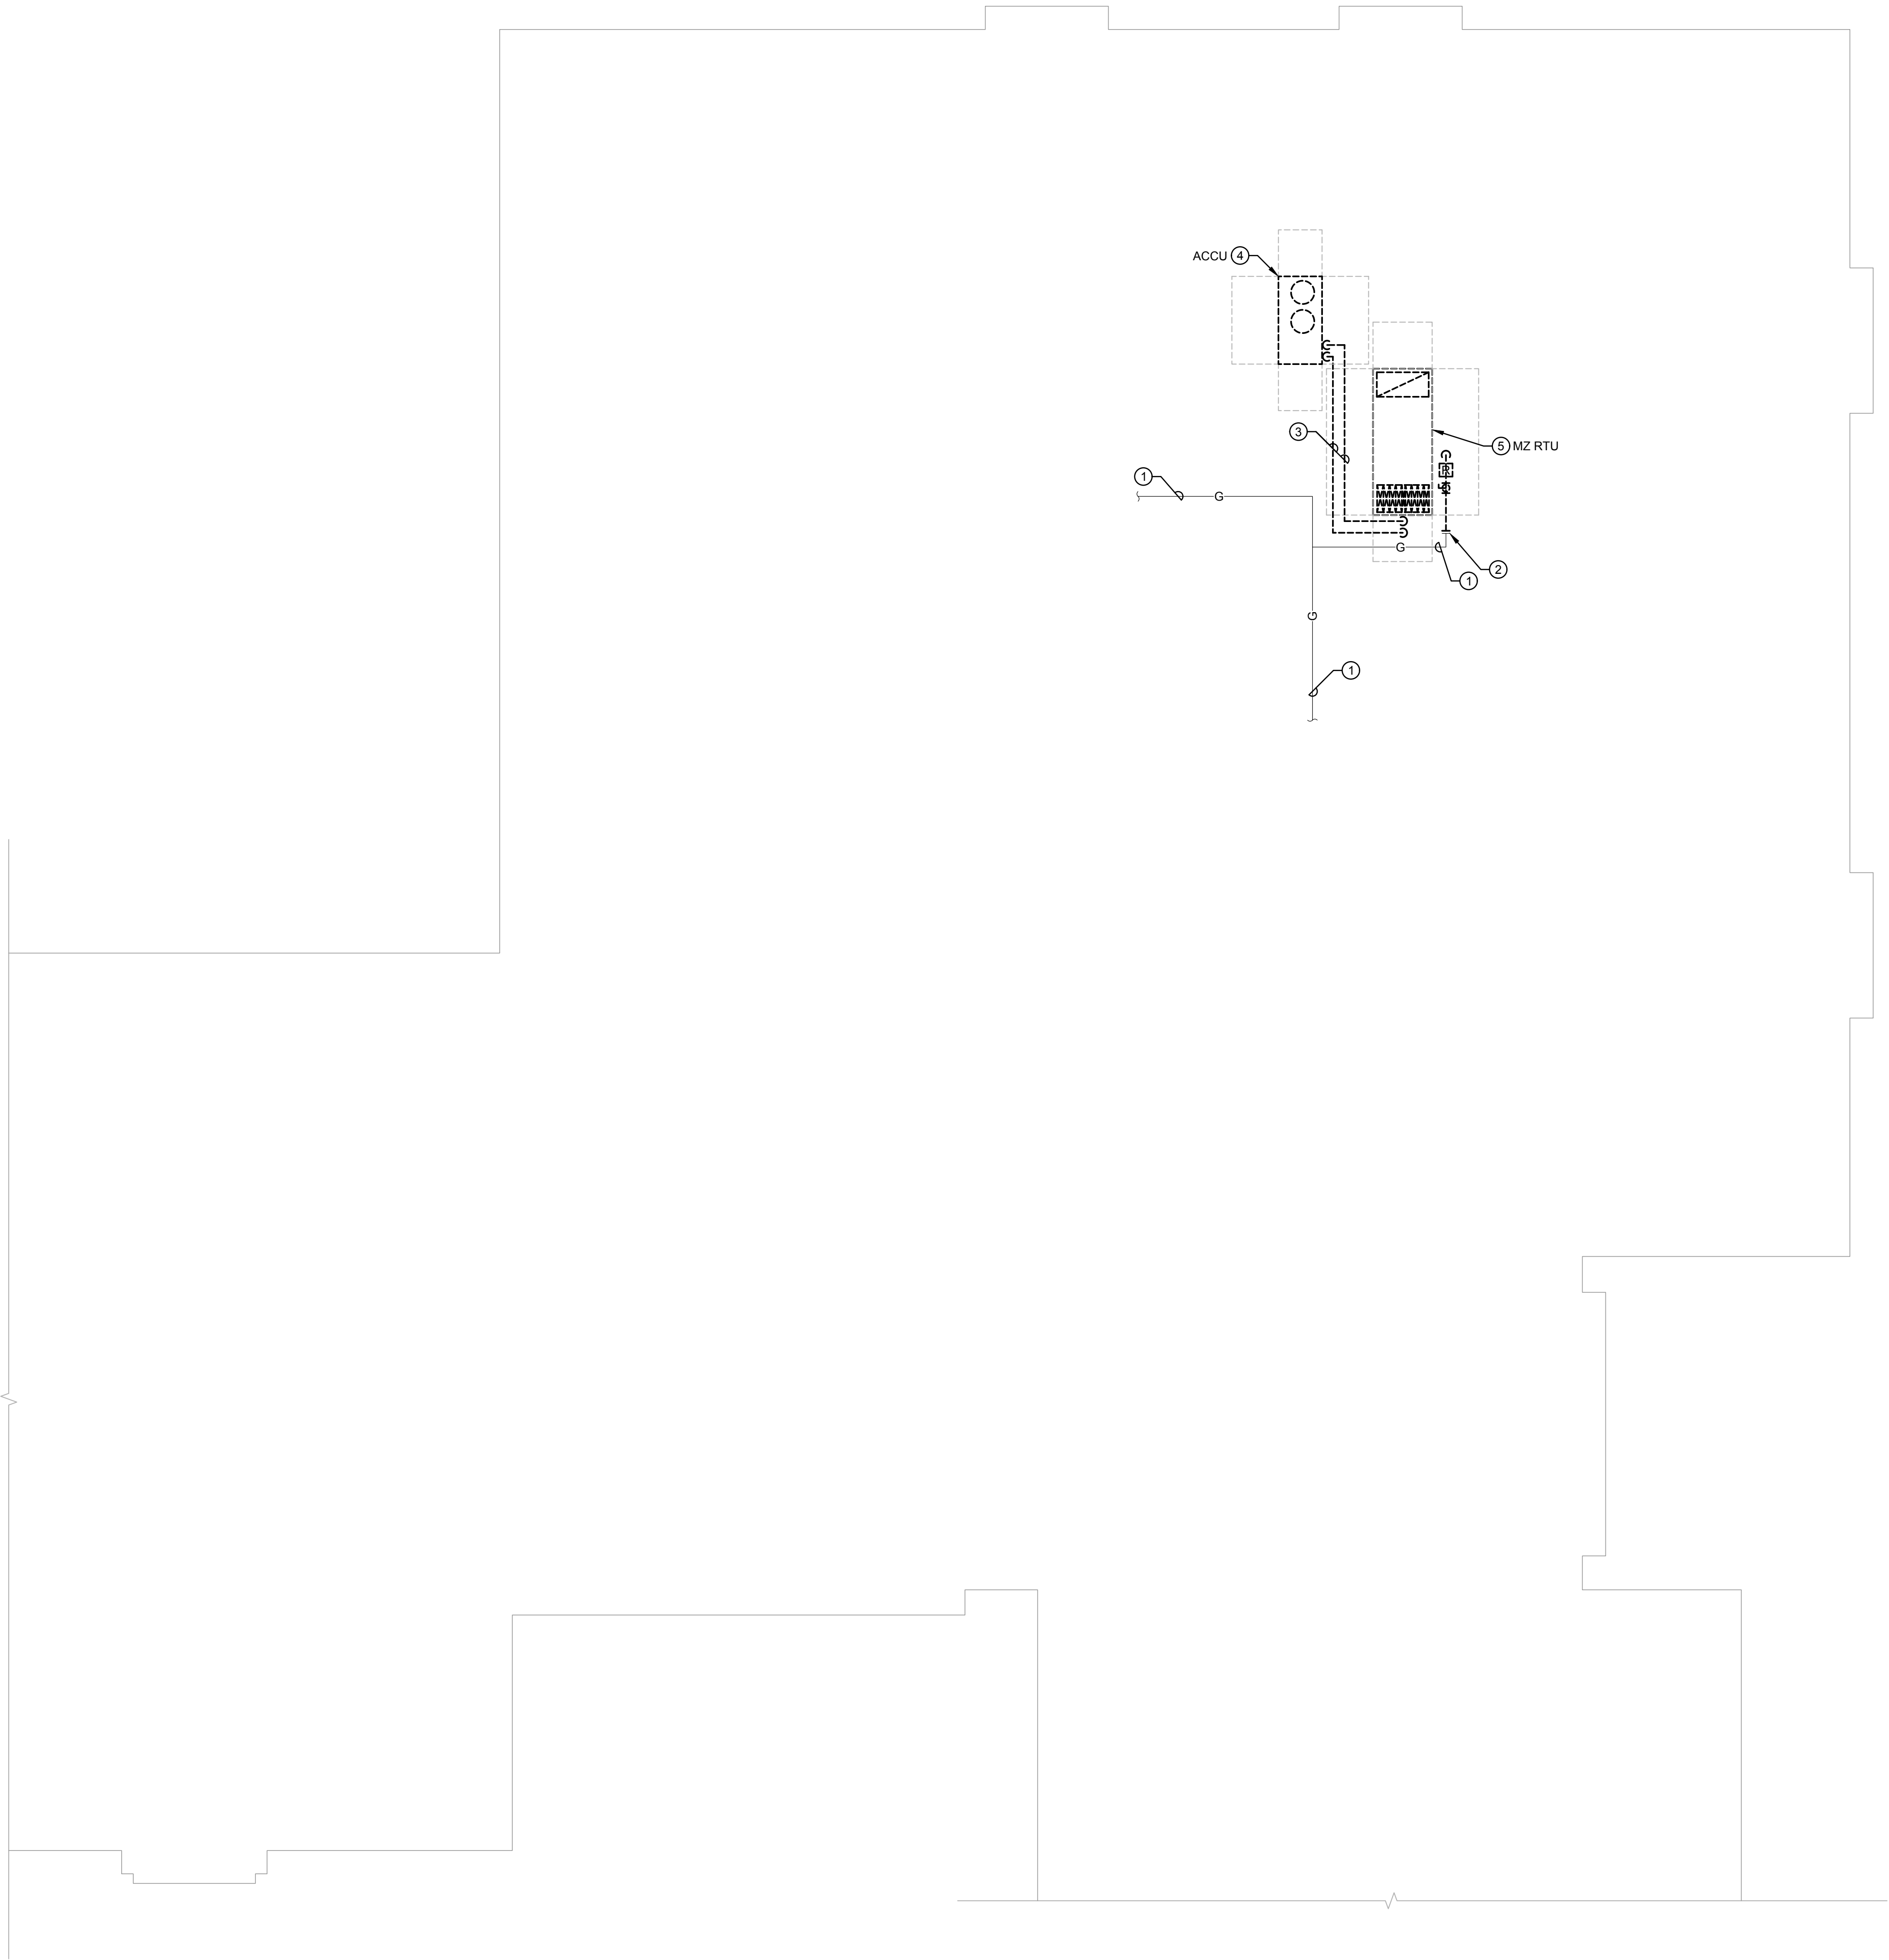


BUILDING AUTOMATION SYSTEM NOTES:
ALL CONTROL WORK SHALL BE AN EXTENSION OF THE EXISTING INTELLI-BUILDING, BUILDING AUTOMATION SYSTEM (BAS) CURRENTLY INSTALLED IN THE BUILDING. CONTACT RICK FREUND 312.735.6546 OR RICK@INTELLI-BUILDING.COM

TEMPERATURE CONTROLS CONTRACTOR SHALL RE-PROGRAM EXISTING BUILDING AUTOMATION SYSTEM AS REQUIRED, AND/OR PROVIDE NEW CONTROLS. UPDATE ALL EXISTING/NEW IDENTIFICATION TAGS AS REQUIRED.

PRIOR TO DEMOLITION, THE HVAC CONTRACTOR SHALL COORDINATE, WITH THE CONTROLS CONTRACTOR, THE REMOVAL OF ALL EQUIPMENT SO THE EQUIPMENT CAN BE TAKEN OFF-LINE AND CONTROL WIRING REMOVED FROM DEVICE.

- DRAWING NOTES:**
- EXISTING PIPING AND VALVING TO REMAIN.
 - NEW CONNECTION TO BE MADE AT THIS LOCATION. REMOVE ALL PIPING, VALVING, HANGERS, SUPPORTS, REGULATORS, DIRT LEGS, ETC. SHOWN DASHED BEYOND THIS POINT.
 - REMOVE ALL PIPING, VALVING, HANGERS, INSULATION, ETC. SHOWN DASHED.
 - REMOVE AIR COOLED CONDENSING UNIT, SUPPORTS, AND ALL ASSOCIATED PIPING, VALVING, AND CONTROLS. EXISTING CURB/RAILS TO REMAIN.
 - REMOVE EXISTING MAMMOTH MULTI-ZONE ROOFTOP UNIT AND ALL ASSOCIATED ZONE DAMPERS, PIPING, VALVES, CONTROLS, HANGERS, SUPPORTS, INSULATION, ETC. REMOVE CURB ADAPTOR AND ROOF CURB UTILIZING DISTRICT'S ROOF CONTRACTOR TO MAINTAIN WARRANTY, IF ONE REMAINS. CAREFULLY DISCONNECT ZONE DUCTS FROM BELOW FOR RECONNECTION TO REPLACEMENT MULTI-ZONE UNIT AT SAME LOCATION.

MURPHY ELEMENTARY SCHOOL ROOF HVAC DEMOLITION PLAN
SCALE 1/8" = 1'-0"

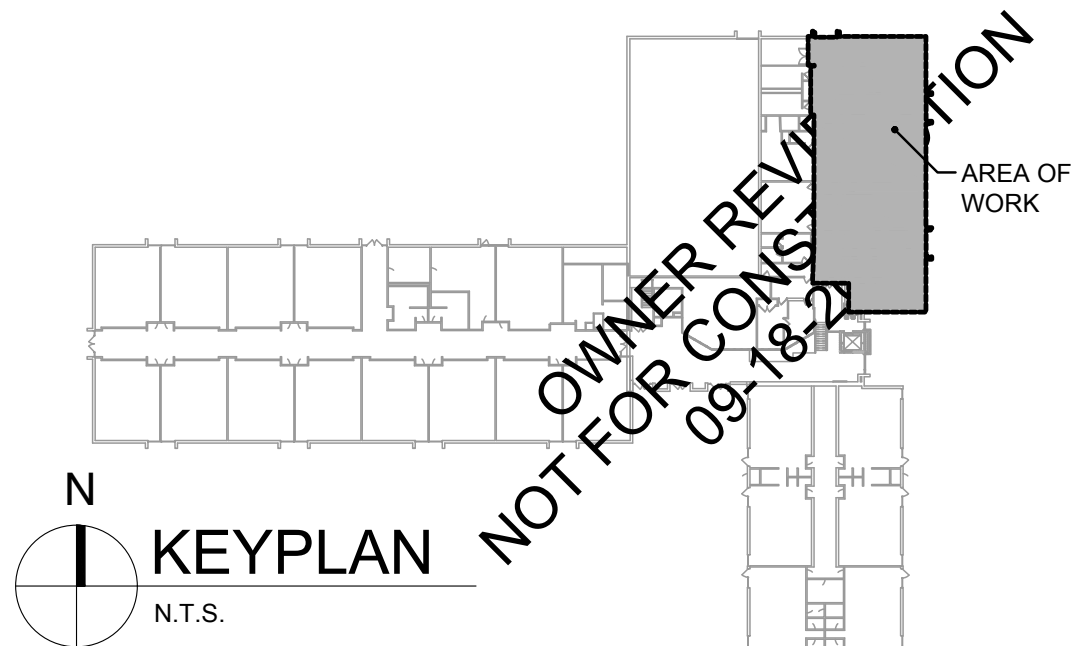

2025 HVAC UPGRADES
Murphy Elementary School, 220 Greenwood Dr, Round Lake Park, IL 60073
Round Lake Middle School, 2000 N Lotus Dr, Round Lake Heights, IL 60073
ROUND LAKE CUSD 116
510 N. CEDAR LAKE ROAD
ROUND LAKE, IL 60073

Issue Date: 18 SEP 2025
Drawn By: CS2
Job Number: 886-S-1
HVD1.3
COPYRIGHT © 2025
CS2 Design Group, LLC

CS2 DESIGN GROUP LLC
837 Oakton Street
Elk Grove, IL 60007
Tel: 847-981-1880
Fax: 847-981-1885
www.cs2designgroup.com

**MURPHY ELEMENTARY SCHOOL
ROOF HVAC DEMOLITION PLAN**

Revisions
ISSUED FOR BID