Prepared for:

Kyrene Elementary School District
8700 South Kyrene Road
Tempe, Arizona 85284

AHERA ASBESTOS INSPECTION REPORT

FOR

KYRENE MIDDLE SCHOOL
1050 EAST CARVER ROAD
TEMPE, ARIZONA 85284

PURCHASE ORDER NO. 251702

Prepared by:

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue, Building 7
Phoenix, Arizona 85027
(623) 516-1415

Dominion Project Number: AZ1418.57

AHERA Inspection Date: June 11 – June 12, 2025 & June 16, 2025

TABLE OF CONTENTS

LIMITATIONS ..... SECTION 1

INSPECTION PROCESS ..... SECTION 2

EXECUTIVE SUMMARY ..... SECTION 3

SITE PLANS ..... SECTION 4

HOMOGENEOUS MATERIALS INVENTORY LISTS ..... SECTION 5

PLM BULK SAMPLE SHEETS ..... SECTION 6

PLM BULK SAMPLE LOCATION MAPS ..... SECTION 7

PHYSICAL ASSESSMENT INFORMATION SHEETS ..... SECTION 8

LABORATORY REPORTS ..... SECTION 9

ASSUMED ACBM LOCATION MAPS ..... SECTION 10

INSPECTOR ACCREDITATION ..... SECTION 11

LABORATORY ACCREDITATION ..... SECTION 12

SECTION 1

♦

LIMITATIONS

LIMITATIONS

The conclusions and results contained herein are based solely on the information presented in this report. The sampling, testing, and observations described in the report represent conditions only at the specified times and locations. Additional materials or information which were hidden, undiscovered, inaccessible, or not a part of the findings presented herein, would result in the modification of the conclusions and recommendations made herein. Any response action guidelines are based solely on the findings contained herein. The response action guidelines are presented as a courtesy and are not to be considered a complete or detailed set of specifications. Dominion conducted this survey as directed by the client and in compliance with applicable regulations.

Dominion is not responsible for the accuracy of information provided by others, or for conditions or consequences arising from relevant facts that were withheld, concealed, undiscovered, or not fully disclosed. Dominion is not a law firm, and therefore, makes no representations regarding any potential liability of any person or entity for site conditions. Further, Dominion is not qualified to present medical advice. If any present or future health issues are in question, it is recommended that the findings in this report be presented to a qualified medical professional for evaluation.

Kyrene Middle School is currently being used daily, therefore, to avoid conspicuous damage and a possible trip and fall hazard, Dominion was only able to check for secondary flooring layers in the corners of each room. Therefore, if the carpets are to be replaced, additional investigation should be carried out into other areas of the flooring to ensure that an undetected second layer of flooring does not exist. Any necessary samples should be collected by a certified inspector prior to the disturbance of any discovered unsampled flooring.

The conclusions and results contained herein are based solely on the information presented in this report, are for the sole and exclusive use of the Client and are subject to the terms and conditions of "The Contract or Purchase Order." No other person or entity may rely on this report without the prior written consent of Dominion Environmental Consultants.

Dominion's scope of service for this report did not include the inspection for, or identification of fungi, lead paint or any other hazardous or controlled substances not specifically identified herein.

This report presents professional opinions and findings of a scientific or technical nature. Dominion is not a law firm and therefore makes no representations or warranty regarding any potential liability of any person or entity for site conditions.

SECTION 2

♦

INSPECTION PROCESS

INSPECTION PROCESS

The Environmental Protection Agency (EPA) in 40 CFR 763, the Asbestos Hazard Emergency Response Act (AHERA), requires Local Education Agencies (LEAs) to identify friable and non-friable asbestos-containing building material (ACBM) in public and private elementary and secondary schools by visually inspecting school buildings for such materials and by sampling all identified suspect materials if they are not assumed to be ACBM. Those samples are then to be analyzed using appropriate analysis techniques, by a qualified laboratory, as referred to in the regulations. AHERA requires LEAs to only utilize accredited personnel when conducting inspections, re-inspections, developing management plans, or performing response actions. This regulation also includes record-keeping requirements. LEAs may contractually delegate their duties under this rule, but they remain responsible for the proper performance of those duties. LEAs are encouraged to consult with EPA Regional Asbestos Coordinators, or if applicable a State's lead agency designated by the State Governor, for assistance in complying with this rule.

This report complies with AHERA based protocols outlined in 40 CFR 763.85, specifically:

- The campus was visually inspected to identify the locations of all suspected ACBM.
- All suspect materials were touched to determine friability and condition.
- Bulk samples were collected of all homogeneous areas of friable suspected ACBM and all homogeneous areas of non-friable suspected ACBM.
- The date of the inspection, the name and signature of the person making the inspection, State of accreditation, his or her accreditation number and any changes in the condition of known or assumed ACBM are included in this report, if applicable.
- The exact locations where samples were collected during the inspection are marked, as well as a description of the manner used to determine sampling locations, the name and signature of each accredited inspector who collected the samples, State of accreditation and if applicable, his or her accreditation number.
- Also included within the report are any assessments or reassessments made of friable material, the name and signature of the accredited inspector making the assessments, State of accreditation and if applicable, his or her accreditation number.

The sampling protocol outlined in 40 CFR 763.86 is as follows:

Surfacing material is material in a school building that is sprayed-on, troweled-on, or otherwise applied to surfaces, such as acoustic plaster on ceilings and fireproofing materials on structural members, or other materials on surfaces for acoustic, fireproofing, or other purposes. Surfacing materials are collected in a statistically random manner as follows:

- At least three (3) bulk samples shall be collected from each homogeneous area that is one thousand (1,000) square feet.

- At least five (5) bulk samples shall be collected from each homogeneous area that is greater than one thousand (1,000) square feet but less than or equal to five thousand (5,000) square feet.

- At least seven (7) bulk samples shall be collected from each homogeneous area that is greater than five thousand (5,000) square feet.

Thermal system insulation (TSI) in a school building means materials applied to pipes, fittings, boilers, breeching, tanks, ducts, or other interior structural components to prevent heat loss or gain, or water condensation, or for other purposes. TSI samples are collected in a randomly distributed manner as follows:

- A minimum of three (3) bulk samples are collected from each homogeneous area of TSI that is not assumed to be ACBM.

- Collect at least one (1) bulk sample from each homogeneous area of patched TSI that is not assumed to be ACBM if the patched section is less than six (6) linear or square feet.

- In a manner sufficient to determine whether the material is ACBM or not ACBM, collect bulk samples from each insulated mechanical system that is not assumed to be ACBM where cement or plaster is used on fittings such as tees, elbows, or valves.

- Bulk samples are not required to be collected from any homogeneous area where the accredited inspector has determined that the TSI is fiberglass, foam glass, rubber, or other non-ACBM.

  Miscellaneous material is sampled in a sufficient manner to determine whether the material is ACBM or not ACBM. An accredited inspector shall collect bulk samples from each homogeneous area of friable miscellaneous material that is not "assumed" to be ACBM. Therefore, Dominion will collect a minimum of three (3) samples of each miscellaneous material, as a matter of industry standards.

ASSESSMENT OF MATERIALS

In compliance with 40 CFR 763.88, Dominion inspectors have classified the ACBM and suspected ACBM in the school buildings into one of the following categories:

(1) Damaged or significantly damaged Thermal System Insulation ACBM
(2) Damaged friable surfacing ACBM
(3) Significantly damaged friable surfacing ACBM
(4) Damaged or significantly damaged friable miscellaneous ACBM
(5) ACBM with potential for damage
(6) ACBM with potential for significant damage
(7) Any remaining friable ACBM or friable suspected ACBM

As part of the assessment, the following issues have been taken into consideration:

i. Location and the amount of the material, both in total quantity and as a percentage of the functional space.
ii. The type of damage or significant damage (e.g., flaking, blistering, water damage, or other signs of physical damage).
iii. The severity of damage (e.g., major flaking, severely torn jackets, as opposed to occasional flaking, minor tears to jackets).
iv. Extent or spread of damage over large areas or large percentages of the homogeneous area.
v. Whether the material is accessible.
vi. The material's potential for disturbance.
vii. Known or suspected causes of damage or significant damage (e.g., air erosion, vandalism, vibration, water).
viii. Preventive measures might eliminate the reasonable likelihood of undamaged ACBM from becoming significantly damaged.

SECTION 3

♦

EXECUTIVE SUMMARY

EXECUTIVE SUMMARY

INTRODUCTION

Dominion Environmental Consultants, Inc. (Dominion) was authorized, by Mr. Mason Meade with the Kyrene Elementary School District (KESD), to perform the AHERA Asbestos Re-inspection of Kyrene Middle School, located at 1050 East Carver Road in Tempe, Arizona, via a written Purchase Order #251702, dated February 4, 2025.

Due to budgetary constraints, Dominion was directed by Mr. Meade to first sample the easily accessible building materials inside the building until a pre-determined number of samples were collected. Once the allotted number of samples per building had been collected, Dominion was then directed to "assume as asbestos-containing" the remaining suspect building materials. Pursuant to Mr. Meade's directions, the sampling order of importance was determined first on materials with the largest square footage, then least accessible materials, ceramic tiles, and materials least likely to be disturbed.

Dominion was also instructed to incorporate the information in Dominion's pervious Limited Asbestos Inspection Reports, Project Numbers AZ1418.04 dated June 8, 2017, AZ0959.2056 dated February 6, 2019, AZ0959.2635 dated November 19, 2020, AZ0959.3201 dated September 27, 2022, and AZ1418.11 dated March 13, 2024. Per the direction of Mr. Meade, Dominion was instructed to utilize the information from these previous reports and to only collect additional bulk samples of any previously unsampled building materials.

Kyrene Middle School campus consists of three (3) single story, slab on grade, block structures and three (3) two story block structures. No below grade levels were observed for any building on campus.

BACKGROUND INFORMATION

INITIAL LIMITED AHERA ASBESTOS SURVEY – JUNE 8, 2017

Dominion's Limited Asbestos Inspections of the Kyrene Middle School's Janitorial Closet, Band Hallway, and Restroom of Building E/L was conducted on June 8, 2017, by Ms. Krista Wahnefried, an AHERA accredited Asbestos Building Inspector (State of Arizona #25511-2447693-311078, expiration date August 29, 2017).

LIMITED AHERA ASBESTOS SURVEY – FEBRUARY 6, 2019

Dominion's Limited Asbestos Inspections of the Kyrene Middle School's F-207 Science Classroom of Building F were conducted on February 6, 2019, by Mr. Xin Lou, an AHERA accredited Asbestos Building Inspector (State of Arizona #G9017, expiration date October 5, 2019).

LIMITED AHERA ASBESTOS SURVEY – NOVEMBER 19, 2020

Dominion's Limited Asbestos Inspections of the Kyrene Middle School's Rooms G-107 and G-207 of Building G were conducted on November 19, 2020, by Mr. Nick Marcos, an AHERA accredited Asbestos Building Inspector (State of Arizona #4644-8873-040320, expiration date April 3, 2021).

LIMITED AHERA ASBESTOS SURVEY – SEPTEMBER 27, 2022

Dominion's Limited Asbestos Inspections of the Kyrene Middle School's Media Center Boy's Restroom of Building K were conducted on September 27, 2022, by Mr. Nick Marcos, an AHERA accredited Asbestos Building Inspector (State of Arizona #4644-8873-032422, expiration date March 24, 2023).

LIMITED AHERA ASBESTOS SURVEY – MARCH 13, 2024

Dominion's Limited Asbestos Inspections of the Kyrene Middle School's the Gymnasium of Building E, Room H107 of Building H, and the Weight Room and Back Entryway of Building J were conducted on March 13, 2024, by Mrs. Tracey Carpenter, an AHERA accredited Asbestos Building Inspector (State of Arizona #4644-14588-090523, expiration date September 5, 2024).

LIMITED AHERA ASBESTOS INSPECTION – JUNE 4, 2025

Dominion's AHERA Asbestos Inspection, of the Kyrene Middle School was conducted from June 11 to June 12, 2025 and June 16, 2025, by Mr. Nick Marcos, an AHERA accredited Asbestos Building Inspector. (State of Arizona #ON-188748-8873-031325, expiration date March 13, 2026).

COLLECTION OF BULK SAMPLES

Initial Limited AHERA Asbestos Survey – June 2017

A total of twelve (12) bulk samples were collected from eight (8) homogeneous building materials within the Janitorial Closet, Band Hallway and Restroom of Building E/L.

Identified in the following list are the eight (8) suspect homogeneous building materials sampled during the June 2017 limited asbestos inspection.

Building E/L – Janitorial Closet, Band Hallway, and Restroom – 8 Materials – 0 ACBM

- Blue Cove Base
- White Mastic for Blue Cove Base
- Orange Peel Textured Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)
- White Fiberglass Reinforced Plastic (FRP)
- Yellow Mastic for Fiberglass Reinforced Plastic (FRP)

- White 4” x 4” Ceramic Wall Tile
- Off-White Grout for White 4” x 4” Ceramic Wall Tile
- Yellow Mastic for White 4” x 4” Ceramic Wall Tile

Initial Limited AHERA Asbestos Survey – February 2019

A total of nine (9) bulk samples were collected from five (5) homogeneous building materials within the F-207 Science Classroom of Building F.

Identified in the following list are the five (5) suspect homogeneous building materials sampled during the February 2019 limited asbestos inspection.

Building F – F-207 Science Classroom – 5 Materials – 0 ACBM

- White Cabinet Caulking
- Green Paint for Cabinet Caulking
- Blue Cove Base
- White Mastic for Blue Cove Base
- Orange Peel Textured Drywall System (Paint, Texture, Tape, Joint Compound, & Drywall)

Initial Limited AHERA Asbestos Survey – November 2020

A total of twelve (12) bulk samples were collected from five (5) homogeneous building materials within Rooms G-107 and G-207 of Building G.

Identified in the following list are the five (5) suspect homogeneous building materials sampled during the November 2020 limited asbestos inspection.

Building G – Rooms G-107 and G-207 – 5 Materials – 0 ACBM

- Orange Peel Textured Drywall System (Paint, Texture, Tape, Joint Compound, and Drywall)
- White/Tan 2’ x 4’ Ceiling Tile
- White Counter Caulking
- Blue Cove Base
- Tan Mastic for Blue Cove Base

Initial Limited AHERA Asbestos Survey – September 2022

A total of eighteen (18) bulk samples were collected from nine (9) homogeneous building materials within the Media Center Boy’s Restroom of Building K.

Identified in the following list are the nine (9) suspect homogeneous building materials sampled during the September 2022 limited asbestos inspection.

Building K – Media Center Boy's Restroom – 9 Materials – 0 ACBM

- White 4" x 4" Ceramic Wall Tile
- Cream Mastic for White 4" x 4" Ceramic Wall Tile
- Gray Grout for White 4" x 4" Ceramic Wall Tile
- Green 4" x 4" Ceramic Wall Tile
- Blue 4" x 4" Ceramic Wall Tile
- White Fixture Caulking
- Greenboard Drywall
- Cream Mastic for Greenboard Drywall
- White Counter Caulking

Initial Limited AHERA Asbestos Survey – March 2024

A total of eighteen (18) bulk samples were collected from fourteen (14) homogeneous building materials within the Gymnasium of Building E, Room H107 of Building H, and the Weight Room and Back Entryway of Building J.

Identified in the following list are the eighteen (18) suspect homogeneous building materials sampled during the March 2024 limited asbestos inspection.

Building E – Gymnasium – 11 Material – 0 ACBM

- 2" x 2" White Ceramic Floor Tile
- Off-White Grout for 2" x 2" White Ceramic Floor Tile
- Gray Thinset for 2" x 2" White Ceramic Floor Tile
- Black Cove Base
- Beige Mastic for Black Cove Base
- Dark Teal Ceramic Bench Tiles
- Blue-Green Grout for Dark Teal Ceramic Bench Tiles
- Gray Thinset for Dark Teal Ceramic Bench Tiles
- Light Teal Ceramic Bench Tiles
- Blue-Green Grout for Light Teal Ceramic Bench Tiles
- Gray Thinset for Light Teal Ceramic Bench Tiles

Building H – Room H107 – 1 Material – 0 ACBM

- Orange Peel Textured Drywall System (Paint, Texture, Tape, Joint Compound, and Drywall)

Building J – Weight Room – 2 Materials – 0 ACBM

- 12" x 12" White w/Gray Specks Vinyl Floor Tile (VCT)
- Yellow Mastic for 12" x 12" White w/Gray Specks Vinyl Floor Tile (VCT)

2025 AHERA Asbestos Inspection - June 2025

During the 2025 AHERA Asbestos Re-inspection, a total of one hundred and four (104) bulk samples were collected from sixty-one (61) homogeneous building materials (multiple layers) throughout the Kyrene Middle School's Building E/L, F, G, H, J, and K. Identified in the following list are the sixty-one (61) suspect homogeneous materials Dominion sampled during the 2025 AHERA inspection.

Building E/L – 9 Materials – 0 ACBM

- Gray Multicolored Carpet Square
- Transparent Mastic for Gray Multicolored Carpet Square
- Black Carpet Square
- Transparent Mastic for Black Carpet Square
- Blue Cove Base
- Tan Mastic for Blue Cove Base
- 2' x 2' Gray Ceiling Tile
- 2' x 4' Gray Ceiling Tile
- Orange Peel Drywall System - White Paint (Texture, Tape, Joint Compound, and Drywall)

Building F – 10 Materials – 0 ACBM

- Gray Multicolored Carpet Square
- Semi-Transparent Mastic for Gray Multicolored Carpet Square
- Black Carpet Square
- Black Mastic for Black Carpet Square
- Blue Cove Base
- Cream Mastic for Blue Cove Base
- Orange Peel Drywall System - White Paint (Texture, Tape, Joint Compound, and Drywall)
- 2' x 4' Gray Ceiling Tile
- White w/Black 12" x 12" Vinyl Floor Tile (VCT)
- Yellow Mastic for White w/Black 12" x 12" Vinyl Floor Tile (VCT)

Building G – 13 Materials – 0 ACBM

- 2' x 4' Gray Ceiling Tile
- Orange Peel Textured Drywall System (Paint, Texture, Tape, Joint Compound, and Drywall)
- Gray Multicolored Carpet Square
- Transparent Mastic for Gray Multicolored Carpet Square
- Gray Leveling Compound for Carpet Square
- Orange Mastic for Gray Multicolored Carpet Square

- Blue Cove Base
- Tan Mastic for Blue Cove Base
- Black Carpet Square
- Transparent Mastic for Black Carpet Square
- Gray Leveling Compound for Black Carpet Square
- Tan Mastic for Black Carpet Square
- Orange Mastic for Black Carpet Square

Building H – 9 Materials – 0 ACBM

- Gray Decorative 2' x 4' Ceiling Tile
- Gray 2' x 4' Ceiling Tile
- Orange Peel Textured Drywall System (Paint, Texture, Tape, Joint Compound, and Drywall)
- Gray Multicolored Carpet Square
- Gray Mastic for Gray Multicolored Carpet Square
- Blue Cove Base
- Cream Mastic for Blue Cove Base
- Black Carpet Square
- Gray Mastic for Black Carpet Square

Building J – 9 Materials – 0 ACBM

- Old Brown 2' x 4' Ceiling Tile
- New Brown 2' x 4' Ceiling Tile
- Gray Multicolored Carpet Square
- Semi-Transparent Mastic for Carpet Square
- Black Cove Base
- Cream Mastic for Black Cove Base
- Black Carpet Square
- Semi-Transparent Mastic for Black Carpet Square
- Orange Peel Textured Drywall System (Paint, Texture, Tape, Joint Compound, and Drywall)

Building K – 10 Materials – 0 ACBM

- Pink Batt Insulation
- Brown/Black Wrap for Pink Batt Insulation
- 2' x 4' Gray Ceiling Tile
- 2' x 2' Gray Ceiling Tile
- Orange Peel Textured Drywall System (Paint, Texture, Tape, Joint Compound, and Drywall)
- Gray Multicolored Carpet Square
- Transparent Mastic for Gray Multicolored Carpet Square

- Gray Cementitious Material for Carpet Square
- Blue Cove Base
- Tan Mastic for Blue Cove Base

All the suspect bulk samples collected from C.I. Waggoner Elementary School were submitted to EMLab P&K (EMLab) in Phoenix, Arizona for analysis using Polarized Light Microscopy (PLM) methods. EMLab used the methods prescribed in Method 40 CFR, Part 763, in the Code of Federal Register in analyzing bulk samples. EMLab is certified by the National *Institute of Standards* and Technology as a National Voluntary Laboratory Accreditation Program (NVLAP), Number 500031-0. The suspect asbestos bulk samples were collected and submitted to the laboratory using established chain-of-custody procedures.

Bulk samples were collected utilizing safety and health practices as required by the Occupational Safety and Health Administration (OSHA). At the time of sample collection, the buildings were not occupied by students. Only limited administrative and custodial staff were present on campus.

ASSUMED ACBM – JUNE 4, 2025

Due to budgetary constraints, KESD instructed Dominion to assume any unsampled suspect building materials as asbestos containing until further asbestos bulk sampling can be budgeted and conducted. Therefore, listed below are the two hundred and forty-seven (247) building materials that were assumed to contain greater than one percent (>1%) asbestos.

Building E/L – 60 Assumed ACBM

- White w/Black 12" x 12" Vinyl Floor Tile (VCT)
- Mastic for White w/Black 12" x 12" Vinyl Floor Tile (VCT)
- Black 12" x 12" Vinyl Floor Tile (VCT)
- Mastic for Black 12" x 12" Vinyl Floor Tile (VCT)
- Black Stair Tread
- Mastic for Black Stair Tread
- Brick
- Mortar for Brick
- Tackboard
- Knockdown Drywall System
- Brown Fiberglass Reinforced Plastic (FRP)
- Mastic for Brown Fiberglass Reinforced Plastic (FRP)
- 2' x 4' Drywall Ceiling Tile
- Brown 6" x 6" Ceramic Floor Tile
- Grout for Brown 6" x 6" Ceramic Floor Tile
- Thinset for Brown 6" x 6" Ceramic Floor Tile
- Interior Caulking
- Exterior Caulking
- Gray Sink Coating

- Brown 4" x 6" Ceramic Wall Tile
- Grout for Brown 4" x 6" Ceramic Wall Tile
- Mastic for Brown 4" x 6" Ceramic Wall Tile
- Dark Brown 6" x 6" Replacement Ceramic Wall Tile
- Grout for Replacement Ceramic Wall Tile
- Mastic for Replacement Ceramic Wall Tile
- White w/Brown 4" x 4" Ceramic Wall Tile
- Grout for White w/Brown 4" x 4" Ceramic Wall Tile
- Mastic for White w/Brown 4" x 4" Ceramic Wall Tile
- Green 4" x 4" Ceramic Wall Tile
- Fixture Caulking
- Divider Wall
- Black Rubber Flooring
- Tan 4" x 4" Ceramic Wall Tile
- Grout for Tan 4" x 4" Ceramic Wall Tile
- Mastic for Tan 4" x 4" Ceramic Wall Tile
- Blue 4" x 4" Ceramic Wall Tile
- Tan 2" x 2" Ceramic Floor Tile
- Grout for Tan 2" x 2" Ceramic Floor Tile
- Thinset for Tan 2" x 2" Ceramic Floor Tile
- Green 2" x 2" Ceramic Floor Tile
- Blue 2" x 2" Ceramic Floor Tile
- Marble Threshold
- Black L-Shaped Cove Base
- Mastic for Black L-Shaped Cove Base
- Tan Multicolored 12" x 12" Vinyl Floor Tile (VCT)
- Mastic for Tan multicolored 12" x 12" (VCT)
- Tan 3" x 3" Ceramic Floor Tile
- Grout for Tan 3" x 3" Ceramic Floor Tile
- Thinset for Tan 3" x 3" Ceramic Floor Tile
- Block
- Mortar for Block
- Skylight Insulation Panel
- Silver Flex Duct Wrap
- Large Silver Duct Wrap
- Small Silver Duct Wrap
- Unfinished Drywall System
- Gray Duct Mastic
- Black Foam Pipe Insulation
- White Pipe Wrap
- Mastic for White Pipe Wrap

Building F – 34 Assumed ACBM

- Interior Caulking
- Exterior Caulking
- Divider Wall
- Gray Sink Coating
- Glass Block Mortar
- Brick
- Mortar for Brick
- Tackboard
- Tan 4" x 4" Ceramic Wall Tile
- Grout for Tan 4" x 4" Ceramic Wall Tile
- Mastic for Tan 4" x 4" Ceramic Wall Tile
- Blue 4" x 4" Ceramic Wall Tile
- Green 4" x 4" Ceramic Wall Tile
- Tan 2" x 2" Ceramic Floor Tile
- Grout for Tan 2" x 2" Ceramic Floor Tile
- Thinset for Tan 2" x 2" Ceramic Floor Tile
- Blue 2" x 2" Ceramic Floor Tile
- Green 2" x 2" Ceramic Floor Tile
- Fixture Caulking
- Fiberglass Reinforced Plastic (FRP)
- Mastic for Fiberglass Reinforced Plastic (FRP)
- Gray Stair Tread
- Mastic for Gray Stair Tread
- Gray 20" x 20" Floor Tile
- Mastic for Gray 20" x 20" Floor Tile
- Knockdown Drywall System
- Silver Flex Duct Wrap
- Silver Box Duct Wrap
- Gray Duct Mastic
- Unfinished Drywall System
- Black Foam Pipe Insulation
- White Pipe Wrap
- Insulation for White Pipe Wrap
- Skylight Insulation Panel

Building G – 38 Assumed ACBM

- Divider Wall
- Tackboard
- Interior Caulking
- Exterior Caulking

- White Sink Coating
- White w/Black 12" x 12" Vinyl Floor Tile (VCT)
- Mastic for White w/Black 12" x 12" Vinyl Floor Tile (VCT)
- Brick
- Mortar for Brick
- Tan 4" x 4" Ceramic Wall Tile
- Grout for Tan 4" x 4" Ceramic Wall Tile
- Mastic for Tan 4" x 4" Ceramic Wall Tile
- Green 4" x 4" Ceramic Wall Tile
- Blue 4" x 4" Ceramic Wall Tile
- Tan 2" x 2" Ceramic Floor Tile
- Grout for Tan 2" x 2" Ceramic Floor Tile
- Thinset for Tan 2" x 2" Ceramic Floor Tile
- Green 2" x 2" Ceramic Floor Tile
- Blue 2" x 2" Ceramic Floor Tile
- Marble Threshold
- Fixture Caulking
- Knockdown Drywall System
- Terrazzo Mop Sink
- Brown Fiberglass Reinforced Plastic (FRP)
- Mastic for Brown Fiberglass Reinforced Plastic (FRP)
- Glass Block Mortar
- Black Stair Tread
- Mastic for Black Stair Tread
- Black 20" x 20" Floor Tile
- Mastic for Black 20" x 20" Floor Tile
- Skylight Insulation Panel
- Silver Flex Duct Wrap
- Silver Box Duct Wrap
- Gray Duct Mastic
- Unfinished Drywall System
- Black Foam Pipe Insulation
- White Pipe Wrap
- Mastic for White Pipe Wrap

<u>Building H – 38 Assumed ACBM</u>

- White w/Black 12" x 12" Vinyl Floor Tile (VCT)
- Mastic for White w/Black 12" x 12" Vinyl Floor Tile (VCT)
- Interior Caulking
- Exterior Caulking
- Gray Sink Coating
- Divider Wall

- Brick
- Mortar for Brick
- Tackboard
- Black Stair Tread
- Mastic for Black Stair Tread
- Black Cove Base
- Mastic for Black Cove Base
- Black 20" x 20" Floor Tile
- Mastic for Black 20" x 20" Floor Tile
- Tan 4" x 4" Ceramic Wall Tile
- Grout for Tan 4" x 4" Ceramic Wall Tile
- Mastic for Tan 4" x 4" Ceramic Wall Tile
- Green 4" x 4" Ceramic Wall Tile
- Blue 4" x 4" Ceramic Wall Tile
- Tan 2" x 2" Ceramic Floor Tile
- Grout for Tan 2" x 2" Ceramic Floor Tile
- Thinset for Tan 2" x 2" Ceramic Floor Tile
- Green 2" x 2" Ceramic Floor Tile
- Blue 2" x 2" Ceramic Floor Tile
- Knockdown Drywall System
- White Sink Coating
- Glass Block Mortar
- Marble Threshold
- Fixture Caulking
- Skylight Insulation Panel
- Silver Flex Duct Wrap
- Silver Box Duct Wrap
- Gray Duct Mastic
- Unfinished Drywall System
- Black Foam Pipe Insulation
- White Pipe Wrap
- Mastic for White Pipe Wrap

Building J – 40 Assumed ACBM

- Fiberglass Reinforced Plastic (FRP)
- Mastic for Fiberglass Reinforced Plastic (FRP)
- Gray Sink Coating
- Interior Caulking
- Exterior Caulking
- Tan 4" x 4" Ceramic Wall Tile
- Grout for Tan 4" x 4" Ceramic Wall Tile
- Mastic for Tan 4" x 4" Ceramic Wall Tile

- Green 4" x 4" Ceramic Wall Tile
- Blue 4" x 4" Ceramic Wall Tile
- Tan 2" x 2" Ceramic Floor Tile
- Grout for Tan 2" x 2" Ceramic Floor Tile
- Thinset for Tan 2" x 2" Ceramic Floor Tile
- Green 2" x 2" Ceramic Floor Tile
- Blue 2" x 2" Ceramic Floor Tile
- Fixture Caulking
- Marble Threshold
- Blue Cove Base
- Mastic for Blue Cove Base
- Tackboard
- Gray 12" x 12" Vinyl Floor Tile (VCT)
- Mastic for Gray 12" x 12" Vinyl Floor Tile (VCT)
- Knockdown Drywall System
- Tan Multicolored 12" x 12" Vinyl Floor Tile (VCT)
- Mastic for Tan Multicolored 12" x 12" VCT
- Brick
- Mortar for Brick
- Gray Floor Coating
- White 6" x 6" Ceramic Wall Tile
- Grout for White 6" x 6" Ceramic Wall Tile
- Mastic for White 6" x 6" Ceramic Wall Tile
- Skylight Insulation Panel
- Large Silver Flex Duct Wrap
- Silver Box Duct Wrap
- Gray Duct Mastic
- Unfinished Drywall
- Black Foam Pipe Insulation
- White Pipe Wrap
- Mastic for White Pipe Wrap
- Residual 12" x 12" Ceiling Tile Mastic

Building K – 37 Assumed ACBM

- Black Carpet Square
- Mastic for Black Carpet Square
- Tan 4" x 4" Ceramic Wall Tile
- Grout for Tan 4" x 4" Ceramic Wall Tile
- Mastic for Tan 4" x 4" Ceramic Wall Tile
- Tan 2" x 2" Ceramic Floor Tile
- Grout for Tan 2" x 2" Ceramic Floor Tile
- Thinset for Tan 2" x 2" Ceramic Floor Tile

- Green 2" x 2" Ceramic Floor Tile
- Blue 2" x 2" Ceramic Floor Tile
- Marble Threshold
- Wallpaper
- Brick
- Mortar for Brick
- White w/Black 12" x 12" Vinyl Floor Tile (VCT)
- Mastic for White w/Black 12" x 12" Vinyl Floor Tile (VCT)
- Interior Caulking
- Exterior Caulking
- Knockdown Drywall System
- Gray Sink Coating
- Gray Carpet Square
- Mastic for Gray Carpet Square
- Dark Gray Cove Base
- Mastic for Dark Gray Cove Base
- Beige Multicolored 12" x 12" Vinyl Floor Tile (VCT)
- Mastic for Beige Multicolored 12" x 12" VCT
- Fiberglass Reinforced Plastic (FRP)
- Mastic for Fiberglass Reinforced Plastic (FRP)
- Terrazzo Mop Sink
- Unfinished Drywall
- Silver Flex Duct Wrap
- Silver Box Duct Wrap
- Black Pipe Foam Insulation
- Pipe Wrap
- Mastic for Pipe Wrap
- Gray Duct Mastic
- Skylight Insulation Panel

INSPECTION FINDINGS

Initial Limited AHERA Asbestos Survey – JUNE 8, 2017

All eight (8) of the homogeneous building materials sampled during the June 2017 inspection within the Janitorial Closet, Band Hallway, and Restroom of Building E/L were reported by the laboratory using the PLM analysis method to be “none detected” for asbestos content.

Initial Limited AHERA Asbestos Survey – FEBRUARY 6, 2019

All five (5) of the homogeneous building materials sampled during the February 2019 inspection within F-207 Science Classroom of Building F were reported by the laboratory using the PLM analysis method to be “none detected” for asbestos content.

Initial Limited AHERA Asbestos Survey – NOVEMBER 19, 2020

All five (5) of the homogeneous building materials sampled during the November 2020 inspection within Rooms G-107 and G-207 of Building G were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

Initial Limited AHERA Asbestos Survey – SEPTEMBER 27, 2022

All nine (9) of the homogeneous building materials sampled during the September 2022 inspection within the Media Center Boy's Restroom of Building K were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

Initial Limited AHERA Asbestos Survey – MARCH 13, 2024

All eleven (11) of the homogeneous building materials sampled during the March 2024 inspection within the Gymnasium of Building E, Room H107 of Building H, and the Weight Room and Back Entryway of Building J were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

2025 AHERA ASBESTOS RE-INSPECTION – JUNE 4, 2025

All sixty-one (61) of the homogeneous building materials sampled during the June 2025 inspection within Buildings E/L, F, G, H, J & K were reported by the laboratory using the PLM analysis method to be "none detected" for asbestos content.

As directed, and as listed above two hundred and forty-seven (247) suspect homogeneous building materials were *assumed* to contain greater than one percent (>1%) asbestos.

RECOMMENDATIONS

Any building material within the Kyrene Middle School campus not identified in this inspection report that is not wood, glass, or metal, is a suspect ACBM and should not be removed, sanded, ground, abraded, or otherwise disturbed by any person without being first properly trained as per 40 CFR 763.92 and, or 29 CFR 1926.1101. For detailed recommendations, please refer to the Kyrene Middle School AHERA Management Plan.

The ACBM or assumed ACBM located within the structures of the Kyrene Middle School campus can be managed in compliance with the Kyrene Elementary School District AHERA Management Plan until such a time as these building materials become degraded, have become friable, or will be disturbed by ongoing maintenance, renovation, or a demolition activity. Prior to a renovation or demolition activity, the previously listed assumed ACBM should be sampled by an AHERA Certified Building Inspector to determine the presence of asbestos.


At least once every six (6) months after a management plan is in effect, the KESD should conduct periodic surveillance in each building that it leases, owns, or otherwise uses as a school building that contains ACBM.

At least once every three (3) years after a management plan is in effect, the KESD should conduct an inspection of all ACBM on the school campus.

The AHERA inspection is limited to only the interior of the buildings and the underside of any covered walkways. This would mean that the additional suspect building materials found on the exterior of the buildings or structures, that are not regulated by AHERA are regulated by EPA NESHAP and OSHA. Therefore, prior to any disturbance of these un-sampled or newly installed suspect building materials, Dominion recommends that these suspect materials be sampled by an AHERA Certified Building Inspector and analyzed for asbestos content by a qualified laboratory prior to any disturbance.

The property owner or his representatives should retain the services of an independent asbestos consulting firm to monitor the performance of any asbestos abatement activities. The consulting firm should oversee the completeness of any asbestos removal and verify the quality of the air during the removal work and perform final clearance air sampling in accordance with the AHERA guidelines.

All documentation is being provided to the Kyrene Elementary School District and must be retained as a permanent record. Should you have any questions regarding the procedures that were followed on this project, please contact Dominion at any time. Thank you for the opportunity to provide these environmental consulting services.



2025 AHERA Building Inspector
Nick Marcos
AHERA Certificate Number: ON-188748-8873-031325
Expires: March 13, 2026

Historical Information

2024 AHERA Building Inspector
Tracey Carpenter
AHERA Certificate Number: ON-4644-14588-090523
Expired: September 6, 2024

2022 AHERA Building Inspector
Nick Marcos
AHERA Certificate Number: ON-188748-8873-032422
Expired: March 24, 2023

2020 AHERA Building Inspector
Nick Marcos
AHERA Certificate Number: ON-188748-8873-040320
Expired: April 3, 2021


2019 AHERA Building Inspector
Xin Lou
AHERA Certificate Number: G9017
Expired: October 5, 2019

2017 AHERA Building Inspector
Krista Wahnefried
AHERA Certificate Number: 25511-2447693-311078
Expired: August 29, 2017

SECTION 4

♦

SITE PLANS

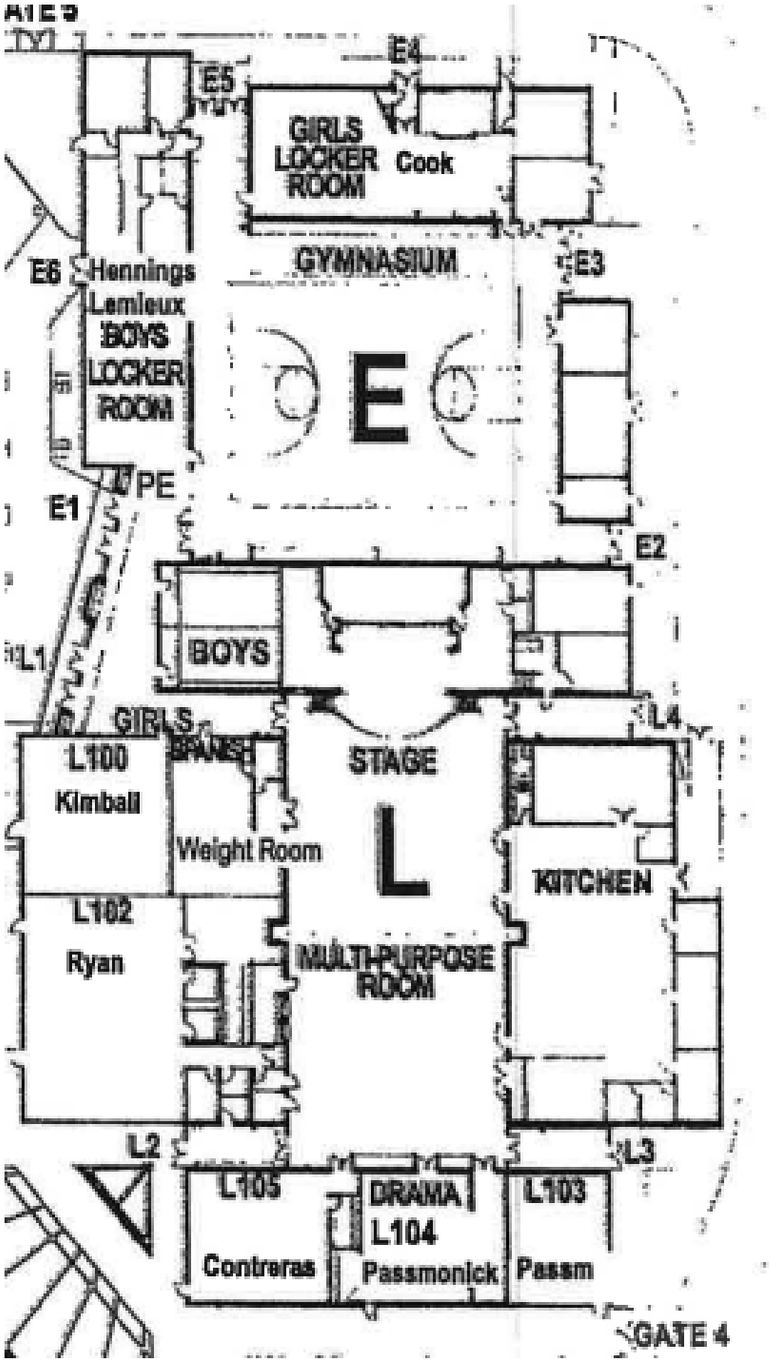


N

Site Plan (1)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.57

Building E/L

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

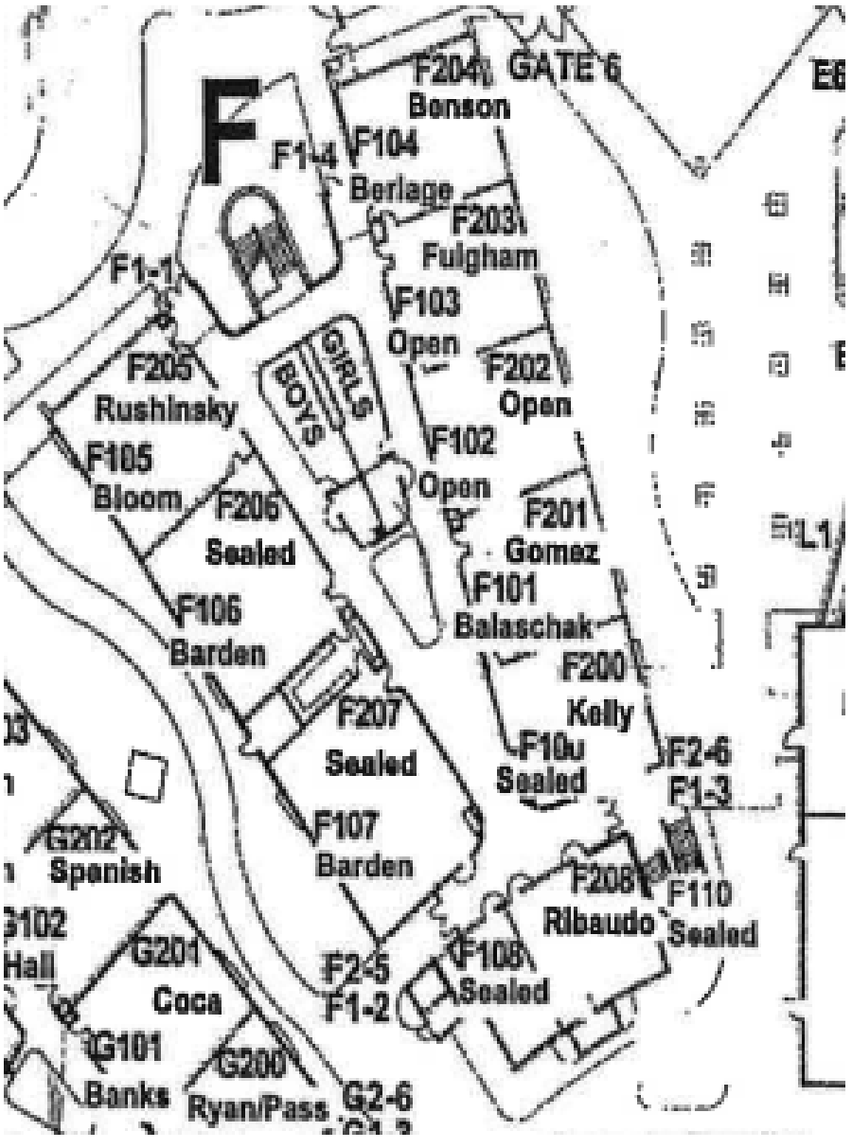

Site Plan (2)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.57

Building F

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415




Site Plan (3)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.57

Building G

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

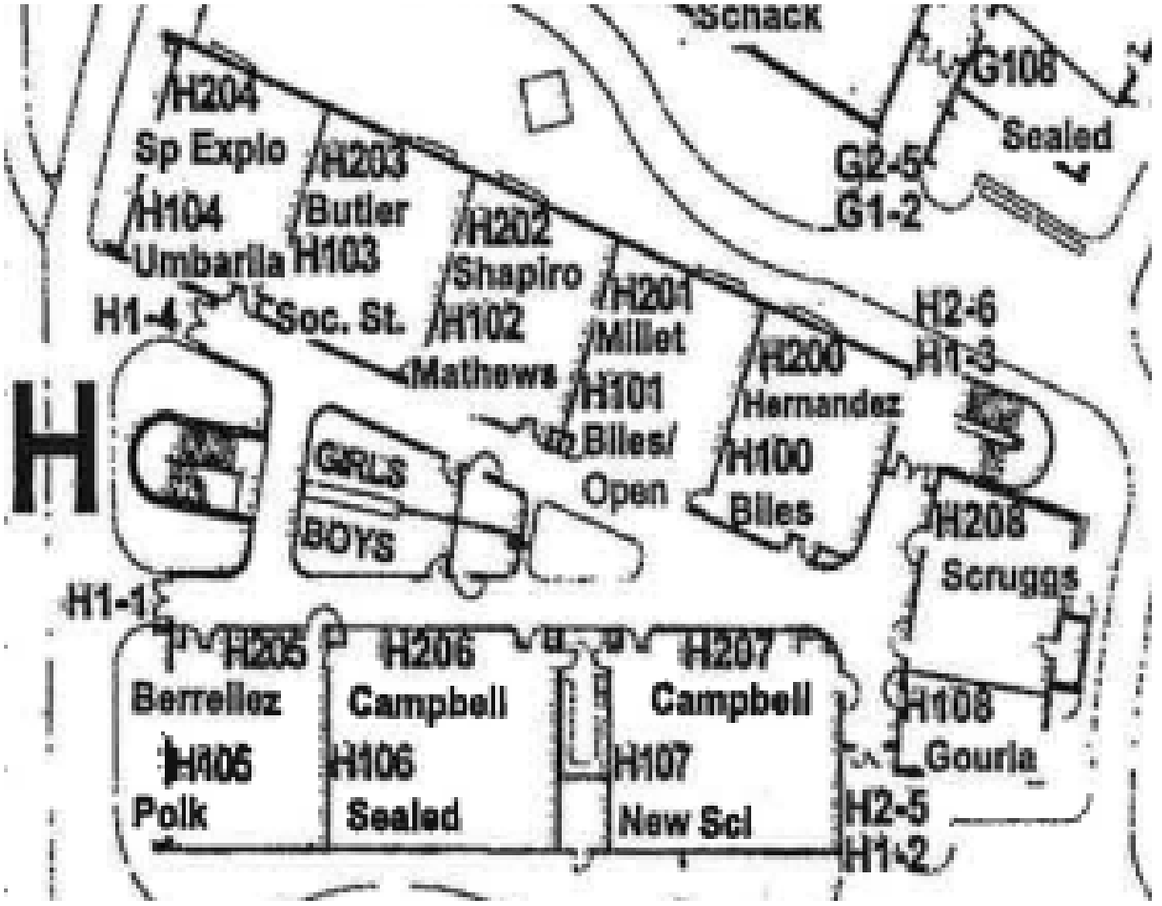


Site Plan (4)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.57

Building H

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

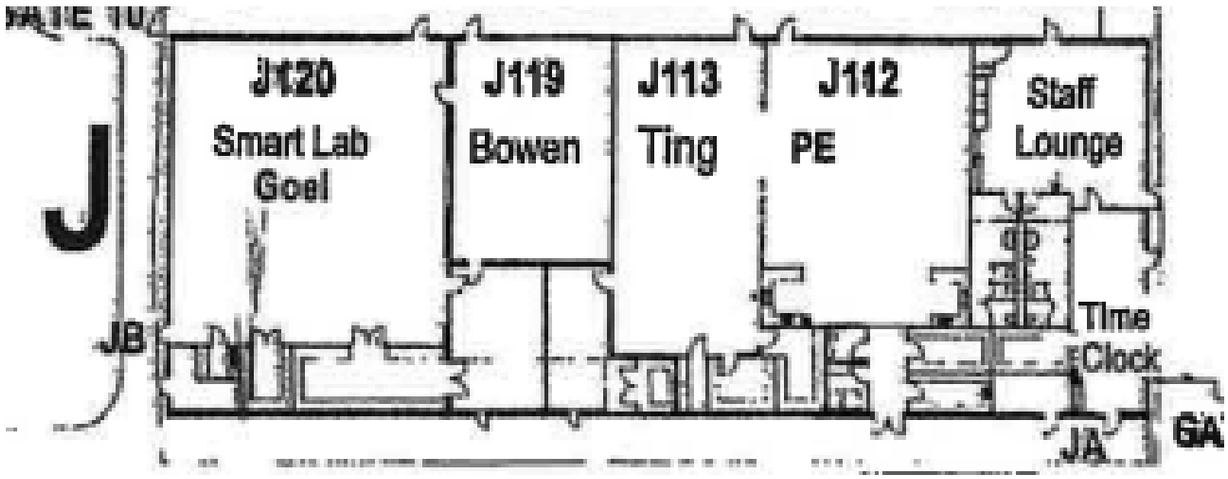


Site Plan (5)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.57

Building J

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

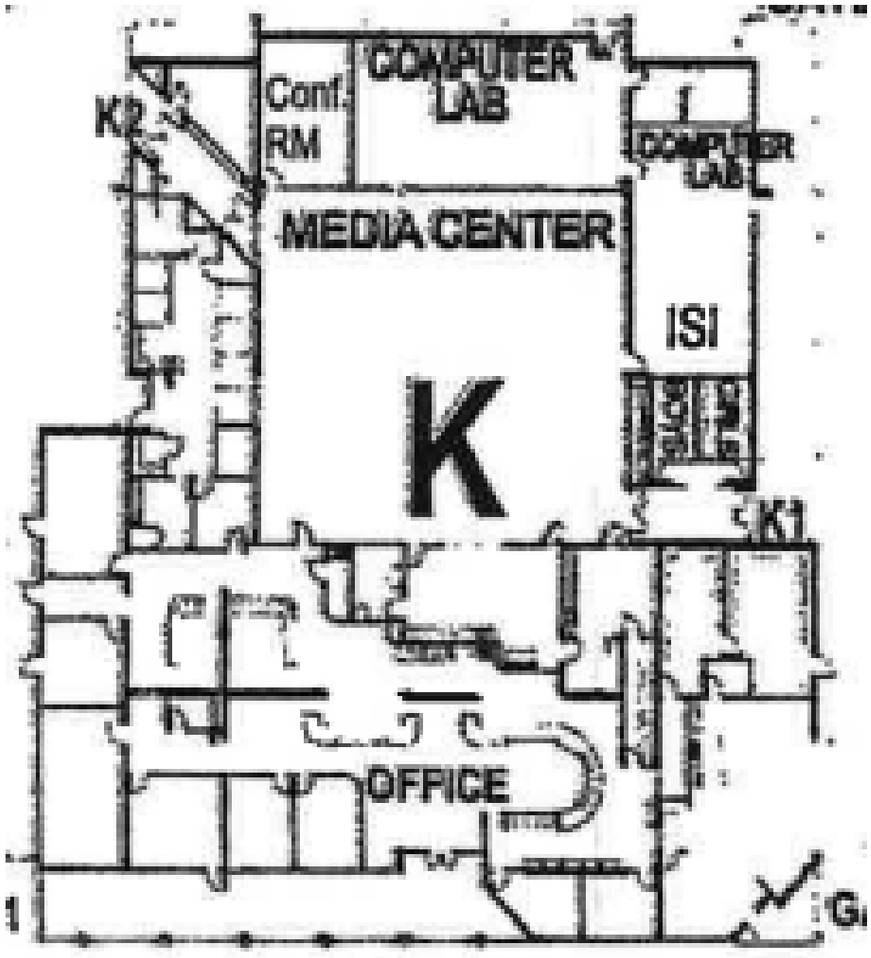

Site Plan (6)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.57

Building K

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

SECTION 5

♦

HOMOGENEOUS MATERIALS INVENTORY LISTS

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.04+AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 06/08/17+03/13/24+06/25/25	Site: Kyrene Middle School - Building E/L

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
Inspection Date: 06/08/2017 - AHERA Building Inspector: Krista Wahnefried (Certification #25511-2447693-311078)						
1	Blue Cove Base	Hallways	No	No	M	350
2	White Mastic for Blue Cove Base		No	No	M	
3	Orange Peel Drywall System - White Paint	Hallways	No	No	S	90,000
	White Texture		No	No	S	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
4	White Fiberglass Reinforced Plastic (FRP)	Janitorial Closet	No	No	M	1,000
5	Yellow Mastic for White Fiberglass Reinforced Plastic (FRP)		No	No	M	
6	White 4" x 4" Ceramic Wall Tile	Restroom	No	No	M	1,000
7	Off-White Grout for White 4" x 4" Ceramic Wall Tile		No	No	M	
8	Yellow Mastic for White 4" x 4" Ceramic Wall Tile		No	No	M	
Inspection Date: 03/13/2024 - AHERA Building Inspector: Tracey Carpenter (Certification #4644-14588-090523)						
9	2" x 2" White Ceramic Floor Tile	Boy's Restroom	No	No	M	3,000
10	Off-White Grout for 2" x 2" White Ceramic Floor Tile		No	No	M	
11	Gray Thinset for 2" x 2" White Ceramic Floor Tile		No	No	M	
12	Black Cove Base	Gymnasium	No	No	M	300
13	Beige Mastic for Black Cove Base		No	No	M	
14	Dark Teal Ceramic Bench Tiles	Locker Rooms	No	No	M	1,000
15	Blue-Green Grout for Dark Teal Ceramic Bench Tiles		No	No	M	
16	Gray Thinset for Dark Teal Ceramic Bench Tiles		No	No	M	
17	Light Teal Ceramic Bench Tiles	Locker Rooms	No	No	M	1,000
18	Blue-Green Grout for Light Teal Ceramic Bench Tiles		No	No	M	
19	Gray Thinset for Light Teal Ceramic Bench Tiles		No	No	M	
Inspection Date: 06/16/2025 - AHERA Building Inspector: Nick Marcos (Certification #4644-8873-031325)						
20	Gray Multicolored Carpet Square	Classrooms Throughout	No	No	M	10,000
21	Transparent Mastic for Gray Multicolored Carpet Square		No	No	M	

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.04+AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 06/08/17+03/13/24+06/25/25	Site: Kyrene Middle School - Building E/L

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
22	Black Carpet Square	Entry Throughout Classrooms	No	No	M	150
23	Transparent Mastic for Black Carpet Square		No	No	M	
24	Blue Cove Base	Throughout	No	No	M	350
25	Tan Mastic for Blue Cove Base		No	No	M	
26	2' x 2' Gray Ceiling Tile	Throughout	No	Yes	M	30,000
27	2' x 4' Gray Ceiling Tile	Throughout	No	Yes	M	20,000
28	Orange Peel Drywall System - White Paint	Throughout	No	No	M	90,000
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
06/16/2025 Assumed ACBM						
29	White w/Black 12" x 12" Vinyl Floor Tile (VCT)	Cafeteria	Assumed	No	M	12,000
30	Mastic for White w/Black 12" x 12" Vinyl Floor Tile (VCT)		Assumed	No	M	
31	Black 12" x 12" Vinyl Floor Tile (VCT)	Stage	Assumed	No	M	2,000
32	Mastic for Black 12" x 12" Vinyl Floor Tile (VCT)		Assumed	No	M	
33	Black Stair Tread	Stage	Assumed	No	M	200
34	Mastic for Black Stair Tread		Assumed	No	M	
35	Brick	Exterior	Assumed	No	M	120,000
36	Mortar for Brick		Assumed	No	M	
37	Tackboard	Throughout	Assumed	No	M	1,500
38	Knockdown Drywall System	Electrical Rooms	Assumed	No	M	3,000
39	Brown Fiberglass Reinforced Plastic (FRP)	Kitchen	Assumed	No	M	5,000
40	Mastic for Brown Fiberglass Reinforced Plastic (FRP)		Assumed	No	M	
41	2' x 4' Drywall Ceiling Tile	Kitchen	Assumed	No	M	5,000
42	Brown 6" x 6" Ceramic Floor Tile	Throughout	Assumed	No	M	5,000
43	Grout for Brown 6" x 6" Ceramic Floor Tile		Assumed	No	M	500
44	Thinset for Brown 6" x 6" Ceramic Floor Tile		Assumed	No	M	5,000

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.04+AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 06/08/17+03/13/24+06/25/25	Site: Kyrene Middle School - Building E/L

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
45	Interior Caulking	Throughout	Assumed	No	M	200
46	Exterior Caulking	Throughout	Assumed	No	M	200
47	Gray Sink Coating	Sinks Throughout	Assumed	No	M	75
48	Brown 4" x 6" Ceramic Wall Tile	Kitchen	Assumed	No	M	2,000
49	Grout for Brown 4" x 6" Ceramic Wall Tile		Assumed	No	M	200
50	Mastic for Brown 4" x 6" Ceramic Wall Tile		Assumed	No	M	2,000
51	Dark Brown 6" x 6" Replacement Ceramic Wall Tile	Kitchen	Assumed	No	M	1,000
52	Grout for Replacement Ceramic Wall Tile		Assumed	No	M	100
53	Mastic for Replacement Ceramic Wall Tile		Assumed	No	M	1,000
54	White w/Brown 4" x 4" Ceramic Wall Tile	Kitchen Restroom	Assumed	No	M	1,000
55	Grout for White w/Brown 4" x 4" Ceramic Wall Tile		Assumed	No	M	100
56	Mastic for White w/Brown 4" x 4" Ceramic Wall Tile		Assumed	No	M	1,000
57	Green 4" x 4" Ceramic Wall Tile	Kitchen Restroom	Assumed	No	M	250
58	Fixture Caulking	Restrooms Throughout	Assumed	No	M	30
59	Divider Wall	Cafeteria	Assumed	No	M	5,000
60	Black Rubber Flooring	Gymnasium	Assumed	No	M	2,000
61	Tan 4" x 4" Ceramic Wall Tile	Kitchen Restroom	Assumed	No	M	4,000
62	Grout for Tan 4" x 4" Ceramic Wall Tile		Assumed	No	M	400
63	Mastic for Tan 4" x 4" Ceramic Wall Tile		Assumed	No	M	4,000
64	Blue 4" x 4" Ceramic Wall Tile	Restroom	Assumed	No	M	1,000
65	Tan 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	5,000
66	Grout for Tan 2" x 2" Ceramic Floor Tile		Assumed	No	M	500
67	Thinset for Tan 2" x 2" Ceramic Floor Tile		Assumed	No	M	5,000
68	Green 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	250
69	Blue 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	250
70	Marble Threshold	Throughout	Assumed	No	M	50
71	Black L-Shaped Cove Base	Gymnasium	Assumed	No	M	300
72	Mastic for Black L-Shaped Cove Base		Assumed	No	M	

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.04+AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 06/08/17+03/13/24+06/25/25	Site: Kyrene Middle School - Building E/L

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
73	Tan Multicolored 12" x 12" Vinyl Floor Tile (VCT)	Locker Rooms	Assumed	No	M	3,000
74	Mastic for Tan Multicolored 12" x 12" (VCT)		Assumed	No	M	
75	Tan 3" x 3" Ceramic Floor Tile	Locker Rooms	Assumed	No	M	1,500
76	Grout for Tan 3" x 3" Ceramic Floor Tile		Assumed	No	M	150
77	Thinset for Tan 3" x 3" Ceramic Floor Tile		Assumed	No	M	1,500
78	Block	Throughout	Assumed	No	M	150,000
79	Mortar for Block		Assumed	No	M	
80	Skylight Insulation Panel	Above Ceiling	Assumed	No	M	3,000
81	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	2,000
82	Large Silver Duct Wrap	Above Ceiling	Assumed	No	M	2,000
83	Small Silver Duct Wrap	Above Ceiling	Assumed	No	M	1,000
84	Unfinished Drywall System	Above Ceiling	Assumed	No	M	30,000
85	Gray Duct Mastic	Above Ceiling	Assumed	No	M	200
86	Black Foam Pipe Insulation	Above Ceiling	Assumed	No	M	200
87	White Pipe Wrap	Above Ceiling	Assumed	No	M	2,000
88	Mastic for White Pipe Wrap	Above Ceiling	Assumed	No	M	

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ0959.2056+AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 02/06/19+06/16/25	Site: Kyrene Middle School - Building F

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
Inspection Date: 02/06/2019 - AHERA Building Inspector: Xin Lou (Certification #G9017)						
1	White Cabinet Caulking	Room F-207	No	No	M	40
2	Green Paint for White Cabinet Caulking		No	No	M	
3	Blue Cove Base	Throughout	No	No	M	600
4	White Mastic for Blue Cove Base		No	No	M	
5	Orange Peel Drywall System - White Paint	Throughout	No	No	S	50,000
	White Texture		No	No	S	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
Inspection Date: 06/16/2025 - AHERA Building Inspector: Nick Marcos (Certification #4644-8873-031325)						
6	Gray Multicolored Carpet Square	Throughout	No	No	M	22,000
7	Semi-Transparent Mastic for Gray Multicolored Carpet Square		No	No	M	
8	Black Carpet Square	Entry	No	No	M	250
9	Black Mastic for Black Carpet Square		No	No	M	
10	Blue Cove Base	Throughout	No	No	M	600
11	Cream Mastic for Blue Cove Base		No	No	M	
12	Orange Peel Drywall System - White Paint	Throughout	No	No	S	50,000
	White Texture		No	No	S	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
13	2' x 4' Gray Ceiling Tile	Throughout	No	Yes	M	30,000
14	White w/Black 12" x 12" Vinyl Floor Tile (VCT)	Throughout	No	No	M	5,000
15	Yellow Mastic for White w/Black 12" x 12" Vinyl Floor Tile (VCT)		No	No	M	
06/16/2025 Assumed ACBM						
16	Interior Caulking	Throughout	Assumed	No	M	200

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ0959.2056+AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 02/06/19+06/16/25	Site: Kyrene Middle School - Building F

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
17	Exterior Caulking	Throughout	Assumed	No	M	200
18	Divider Wall	Throughout	Assumed	No	M	2,000
19	Gray Sink Coating	Throughout	Assumed	No	M	125
20	Glass Block Mortar	Throughout	Assumed	No	M	150
21	Brick	Throughout	Assumed	No	M	100,000
22	Mortar for Brick		Assumed	No	M	
23	Tackboard	Throughout	Assumed	No	M	8,000
24	Tan 4" x 4" Ceramic Wall Tile	Throughout	Assumed	No	M	4,000
25	Grout for Tan 4" x 4" Ceramic Wall Tile		Assumed	No	M	400
26	Mastic for Tan 4" x 4" Ceramic Wall Tile		Assumed	No	M	4,000
27	Blue 4" x 4" Ceramic Wall Tile	Throughout	Assumed	No	M	500
28	Green 4" x 4" Ceramic Wall Tile	Throughout	Assumed	No	M	500
29	Tan 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	4,000
30	Grout for Tan 2" x 2" Ceramic Floor Tile		Assumed	No	M	400
31	Thinset for Tan 2" x 2" Ceramic Floor Tile		Assumed	No	M	4,000
32	Blue 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	500
33	Green 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	500
34	Fixture Caulking	Throughout	Assumed	No	M	40
35	Fiberglass Reinforced Plastic (FRP)	Throughout	Assumed	No	M	150
36	Mastic for Fiberglass Reinforced Plastic (FRP)		Assumed	No	M	
37	Gray Stair Tread	Throughout	Assumed	No	M	600
38	Mastic for Gray Stair Tread		Assumed	No	M	
39	Gray 20" x 20" Floor Tile	Throughout	Assumed	No	M	500
40	Mastic for Gray 20" x 20" Floor Tile		Assumed	No	M	
41	Knockdown Drywall System	Throughout	Assumed	No	M	2,000
42	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	2,000
43	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	3,000
44	Gray Duct Mastic	Above Ceiling	Assumed	No	M	300
45	Unfinished Drywall System	Above Ceiling	Assumed	No	M	6,000

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ0959.2056+AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 02/06/19+06/16/25	Site: Kyrene Middle School - Building F

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
46	Black Foam Pipe Insulation	Above Ceiling	Assumed	No	M	200
47	White Pipe Wrap	Above Ceiling	Assumed	No	M	1,000
48	Insulation for White Pipe Wrap	Above Ceiling	Assumed	Yes	TSI	
49	Skylight Insulation Panel		Assumed	No	M	10,500

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ0959.2635+AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 11/19/20+06/12/25	Site: Kyrene Middle School - Building G

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
Inspection Date: 11/19/20 - AHERA Building Inspector: Nick Marcos (Certification #4644-8873-040320)						
1	Orange Peel Drywall System - White Paint	Throughout	No	No	S	50,000
	White Texture		No	No	S	
	White Joint Compound		No	No	M	
	Cream Tape		No	No	M	
	White/Tan Drywall		No	No	M	
2	2' x 4' White/Tan Ceiling Tile	Rooms G-107 and G-207	No	Yes	M	30,000
3	White Counter Caulking	Rooms G-107 and G-208	No	No	M	200
4	Blue Cove Base	Throughout	No	No	M	600
5	Tan Mastic for Blue Cove Base		No	No	M	
Inspection Date: 06/12/25 - AHERA Building Inspector: Nick Marcos (Certification #4644-8873-031325						
6	2' x 4' Gray Ceiling Tile	Throughout	No	No	M	30,000
7	Orange Peel Drywall System - White Paint	Throughout	No	No	S	50,000
	White Texture		No	No	S	
	White Joint Compound		No	No	M	
	Cream Tape		No	No	M	
	White Drywall with Brown Paper		No	No	M	
8	Gray Multicolored Carpet Square	Throughout	No	No	M	22,000
9	Transparent Mastic for Gray Multicolored Carpet Square		No	No	M	
10	Gray Leveling Compound for Carpet Square		No	No	M	
11	Orange Mastic for Gray Multicolored Carpet Square		No	No	M	
12	Blue Cove Base	Throughout	No	No	M	600
13	Tan Mastic for Blue Cove Base		No	No	M	
14	Black Carpet Square	Throughout	No	No	M	250
15	Transparent Mastic for Black Carpet Square		No	No	M	
16	Gray Leveling Compound for Black Carpet Square		No	No	M	
17	Tan Mastic for Black Carpet Square		No	No	M	
18	Orange Mastic for Black Carpet Square		No	No	M	

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ0959.2635+AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 11/19/20+06/12/25	Site: Kyrene Middle School - Building G

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
06/12/25 Assumed ACBM						
19	Divider Wall	Throughout	Assumed	No	M	2,000
20	Tackboard	Throughout	Assumed	No	M	8,000
21	Interior Caulking	Throughout	Assumed	No	M	200
22	Exterior Caulking	Throughout	Assumed	No	M	200
23	White Sink Coating	Throughout	Assumed	No	M	125
24	White w/Black 12" x 12" Vinyl Floor Tile (VCT)	Throughout	Assumed	No	M	5,000
25	Mastic for White w/Black 12" x 12" Vinyl Floor Tile (VCT)		Assumed	No	M	
26	Brick	Throughout	Assumed	No	M	100,000
27	Mortar for Brick		Assumed	No	M	
28	Tan 4" x 4" Ceramic Wall Tile	Throughout	Assumed	No	M	4,000
29	Grout for Tan 4" x 4" Ceramic Wall Tile		Assumed	No	M	400
30	Mastic for Tan 4" x 4" Ceramic Wall Tile		Assumed	No	M	4,000
31	Green 4" x 4" Ceramic Wall Tile	Throughout	Assumed	No	M	500
32	Blue 4" x 4" Ceramic Wall Tile	Throughout	Assumed	No	M	500
33	Tan 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	4,000
34	Grout for Tan 2" x 2" Ceramic Floor Tile		Assumed	No	M	400
35	Thinset for Tan 2" x 2" Ceramic Floor Tile		Assumed	No	M	4,000
36	Green 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	500
37	Blue 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	500
38	Marble Threshold	Throughout	Assumed	No	M	25
39	Fixture Caulking	Throughout	Assumed	No	M	40
40	Knockdown Drywall System	Throughout	Assumed	No	M	2,000
41	Terrazzo Mop Sink	Throughout	Assumed	No	M	15
42	Brown Fiberglass Reinforced Plastic (FRP)	Throughout	Assumed	No	M	150
43	Mastic for Brown Fiberglass Reinforced Plastic (FRP)		Assumed	No	M	
44	Glass Block Mortar	Throughout	Assumed	No	M	150

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ0959.2635+AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 11/19/20+06/12/25	Site: Kyrene Middle School - Building G

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
45	Black Stair Tread	Stairway	Assumed	No	M	200
46	Mastic for Black Stair Tread		Assumed	No	M	
47	Black 20" x 20" Floor Tile	Throughout	Assumed	No	M	500
48	Mastic for Black 20" x 20" Floor Tile		Assumed	No	M	
49	Skylight Insulation Panel	Above Ceiling	Assumed	No	M	10,500
50	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	2,000
51	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	2,000
52	Gray Duct Mastic	Above Ceiling	Assumed	No	M	300
53	Unfinished Drywall System	Above Ceiling	Assumed	No	M	6,000
54	Black Foam Pipe Insulation	Above Ceiling	Assumed	No	M	200
55	White Pipe Wrap	Above Ceiling	Assumed	No	M	1,000
56	Mastic for White Pipe Wrap		Assumed	No	M	

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 03/13/25+06/12/25	Site: Kyrene Middle School - Building H

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
Inspection Date: 03/13/24 - AHERA Building Inspector: Tracey Carpenter (Certification #4644-14588-090523)						
1	Orange Peel Drywall System - White Paint	Throughout	No	No	S	50,000
	White Texture		No	No	S	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	Pink Drywall with Brown Paper		No	No	M	
Inspection Date: 06/12/25 - AHERA Building Inspector: Nick Marcos (Certification #4644-8873-031325)						
2	Gray Decorative 2' x 4' Ceiling Tile	Throughout	No	No	M	5,000
3	Gray 2' x 4' Ceiling Tile	Throughout	No	No	M	5,000
4	Orange Peel Drywall System - White Paint	Throughout	No	No	S	50,000
	White Texture		No	No	S	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
5	Gray Multicolored Carpet Square	Throughout	No	No	M	22,000
6	Gray Mastic for Gray Multicolored Carpet Square		No	No	M	
7	Blue Cove Base	Throughout	No	No	M	600
8	Cream Mastic for Blue Cove Base		No	No	M	
9	Black Carpet Square	Throughout	No	No	M	250
10	Gray Mastic for Black Carpet Square		No	No	M	
06/12/25 Assumed ACBM						
11	White w/Black 12" x 12" Vinyl Floor Tile (VCT)	Throughout	Assumed	No	M	5,000
12	Mastic for White w/Black 12" x 12" Vinyl Floor Tile (VCT)		Assumed	No	M	
13	Interior Caulking	Throughout	Assumed	No	M	200
14	Exterior Caulking	Throughout	Assumed	No	M	200
15	Gray Sink Coating	Throughout	Assumed	No	M	125
16	Divider Wall	Throughout	Assumed	No	M	2,000

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 03/13/25+06/12/25	Site: Kyrene Middle School - Building H

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
17	Brick	Throughout	Assumed	No	M	100,000
18	Mortar for Brick		Assumed	No	M	
19	Tackboard	Throughout	Assumed	No	M	8,000
20	Black Stair Tread	Stairway	Assumed	No	M	200
21	Mastic for Black Stair Tread		Assumed	No	M	
22	Black Cove Base	Throughout	Assumed	No	M	150
23	Mastic for Black Cove Base		Assumed	No	M	
24	Black 20" x 20" Floor Tile	Throughout	Assumed	No	M	500
25	Mastic for Black 20" x 20" Floor Tile		Assumed	No	M	
26	Tan 4" x 4" Ceramic Wall Tile	Throughout	Assumed	No	M	4,000
27	Grout for Tan 4" x 4" Ceramic Wall Tile		Assumed	No	M	400
28	Mastic for Tan 4" x 4" Ceramic Wall Tile		Assumed	No	M	4,000
29	Green 4" x 4" Ceramic Wall Tile	Throughout	Assumed	No	M	500
30	Blue 4" x 4" Ceramic Wall Tile	Throughout	Assumed	No	M	500
31	Tan 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	4,000
32	Grout for Tan 2" x 2" Ceramic Floor Tile		Assumed	No	M	400
33	Thinset for Tan 2" x 2" Ceramic Floor Tile		Assumed	No	M	4,000
34	Green 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	500
35	Blue 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	500
36	Knockdown Drywall System	Throughout	Assumed	No	M	2,000
37	White Sink Coating	Throughout	Assumed	No	M	125
38	Glass Block Mortar	Throughout	Assumed	No	M	150
39	Marble Threshold	Throughout	Assumed	No	M	25
40	Fixture Caulking	Throughout	Assumed	No	M	40
41	Skylight Insulation Panel	Above Ceiling	Assumed	No	M	10,500
42	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	2,000
43	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	3,000
44	Gray Duct Mastic	Above Ceiling	Assumed	No	M	300
45	Unfinished Drywall System	Above Ceiling	Assumed	No	M	6,000

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 03/13/25+06/12/25	Site: Kyrene Middle School - Building H

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
46	Black Foam Pipe Insulation	Above Ceiling	Assumed	No	M	200
47	White Pipe Wrap	Above Ceiling	Assumed	No	M	1,000
48	Mastic for White Pipe Wrap		Assumed	No	M	

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 03/13/24+06/11/25	Site: Kyrene Middle School - Building J

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
Inspection Date: 03/13/24 - AHERA Building Inspector: Tracey Carpenter (Certification #4644-14588-090523)						
1	12" x 12" White w/Gray Specs Vinyl Floor Tile (VCT)	Lounge/Workroom, J112 (3 Storage Closets), and J113	No	No	M	2,000
2	Yellow Mastic for 12" x 12" White w/Gray Specs (VCT)		No	No	M	
Inspection Date: 06/11/25 - AHERA Building Inspector: Nick Marcos (Certification #4644-8873-031325)						
3	Old Brown 2' x 4' Ceiling Tile	Throughout	No	No	M	5,000
4	New Brown 2' x 4' Ceiling Tile	Throughout	No	No	M	5,000
5	Gray Multicolored Carpet Square	Lounge, J119, and J120	No	No	M	5,000
6	Semi-Transparent Mastic for Carpet Square		No	No	M	
7	Black Cove Base	J112	No	No	M	150
8	Cream Mastic for Black Cove Base		No	No	M	
9	Black Carpet Square	Lounge, J119, and J120	No	No	M	300
10	Semi-Transparent Mastic for Black Carpet Square		No	No	M	
11	Orange Peel Drywall System - White Paint	Throughout	No	No	M	50,000
	White Texture		No	No	M	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
06/11/25 Assumed ACBM						
12	Fiberglass Reinforced Plastic (FRP)	Throughout	Assumed	No	M	150
13	Mastic for Fiberglass Reinforced Plastic (FRP)		Assumed	No	M	
14	Gray Sink Coating	Throughout	Assumed	No	M	20
15	Interior Caulking	Throughout	Assumed	No	M	100
16	Exterior Caulking	Throughout	Assumed	No	M	100
17	Tan 4" x 4" Ceramic Wall Tile	Throughout	Assumed	No	M	3,000
18	Grout for Tan 4" x 4" Ceramic Wall Tile		Assumed	No	M	300
19	Mastic for Tan 4" x 4" Ceramic Wall Tile		Assumed	No	M	3,000
20	Green 4" x 4" Ceramic Wall Tile	Throughout	Assumed	No	M	500
21	Blue 4" x 4" Ceramic Wall Tile	Throughout	Assumed	No	M	500

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 03/13/24+06/11/25	Site: Kyrene Middle School - Building J

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
22	Tan 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	3,000
23	Grout for Tan 2" x 2" Ceramic Floor Tile		Assumed	No	M	300
24	Thinset for Tan 2" x 2" Ceramic Floor Tile		Assumed	No	M	3,000
25	Green 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	500
26	Blue 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	500
27	Fixture Caulking	Throughout	Assumed	No	M	50
28	Marble Threshold	Throughout	Assumed	No	M	25
29	Blue Cove Base	J112 (3 Storage Closets) and J113	Assumed	No	M	150
30	Mastic for Blue Cove Base		Assumed	No	M	
31	Tackboard	Throughout	Assumed	No	M	10,000
32	Gray 12" x 12" Vinyl Floor Tile (VCT)	Art J112	Assumed	No	M	1,500
33	Mastic for Gray 12" x 12" Vinyl Floor Tile (VCT)		Assumed	No	M	
34	Knockdown Drywall System	Electrical and Kiln Room	Assumed	No	M	2,000
35	Tan Multicolored 12" x 12" Vinyl Floor Tile (VCT)	Lounge Storage and J120 Storage	Assumed	No	M	600
36	Mastic for Tan Multicolored 12" x 12" VCT		Assumed	No	M	
37	Brick	Throughout	Assumed	No	M	60,000
38	Mortar for Brick		Assumed	No	M	
39	Gray Floor Coating	J120 Restroom	Assumed	No	M	150
40	White 6" x 6" Ceramic Wall Tile	J120 Restroom	Assumed	No	M	300
41	Grout for White 6" x 6" Ceramic Wall Tile		Assumed	No	M	30
42	Mastic for White 6" x 6" Ceramic Wall Tile		Assumed	No	M	300
43	Skylight Insulation Panel	Above Ceiling	Assumed	No	M	3,000
44	Large Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	2,000
45	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	2,000
46	Gray Duct Mastic	Above Ceiling	Assumed	No	M	200
47	Unfinished Drywall System	Above Ceiling	Assumed	No	M	6,000
48	Black Foam Pipe Insulation	Above Ceiling	Assumed	No	M	100
49	White Pipe Wrap	Above Ceiling	Assumed	No	M	500
50	Mastic for White Pipe Wrap		Assumed	No	M	

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 03/13/24+06/11/25	Site: Kyrene Middle School - Building J

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
51	Residual 12" x 12" Ceiling Tile Mastic	Above Ceiling	Assumed	No	M	2,000

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ0959.3201AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 09/27/22+06/11/25	Site: Kyrene Middle School - Building K

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
Inspection Date: 09/27/22 - AHERA Building Inspector: Nick Marcos (Certification #4644-8873-032422)						
1	White 4" x 4" Ceramic Wall Tile	Drinking Fountain	No	No	M	300
2	Cream Mastic for White 4" x 4" Ceramic Wall Tile		No	No	M	30
3	Gray Grout for White 4" x 4" Ceramic Wall Tile		No	No	M	300
4	Green 4" x 4" Ceramic Wall Tile	Throughout	No	No	M	500
5	Blue 4" x 4" Ceramic Wall Tile	Throughout	No	No	M	500
6	White Fixture Caulking	Throughout	No	No	M	100
7	Greenboard Drywall	Restrooms Near Media Center	No	No	M	250
8	Cream Mastic for Greenboard Drywall		No	No	M	
9	White Counter Caulking	Throughout	No	No	M	100
Inspection Date: 06/11/25 - AHERA Building Inspector: Nick Marcos (Certification #4644-8873-031325)						
10	Pink Batt Insulation	Above Ceiling	No	Yes	TSI	20,000
11	Brown/Black Wrap for Pink Batt Insulation		No	No	M	
12	2' x 4' Gray Ceiling Tile	Throughout	No	No	M	5,000
13	2' x 2' Gray Ceiling Tile	Throughout	No	No	M	15,000
14	Orange Peel Drywall System - White Paint	Throughout	No	No	S	80,000
	White Texture		No	No	S	
	Cream Tape		No	No	M	
	White Joint Compound		No	No	M	
	White Drywall with Brown Paper		No	No	M	
15	Gray Multicolored Carpet Square	Throughout	No	No	M	15,000
16	Transparent Mastic for Gray Multicolored Carpet Square		No	No	M	
17	Gray Cementitious Material for Carpet Square		No	No	M	
18	Blue Cove Base	Throughout	No	No	M	525
19	Tan Mastic for Blue Cove Base		No	No	M	
06/11/25 Assumed ACBM						
20	Black Carpet Square	Throughout	Assumed	No	M	300
21	Mastic for Black Carpet Square		Assumed	No	M	

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ0959.3201AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 09/27/22+06/11/25	Site: Kyrene Middle School - Building K

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
22	Tan 4" x 4" Ceramic Wall Tile	Throughout	Assumed	No	M	3,000
23	Grout for Tan 4" x 4" Ceramic Wall Tile		Assumed	No	M	300
24	Mastic for Tan 4" x 4" Ceramic Wall Tile		Assumed	No	M	3,000
25	Tan 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	3,000
26	Grout for Tan 2" x 2" Ceramic Floor Tile		Assumed	No	M	300
27	Thinset for Tan 2" x 2" Ceramic Floor Tile		Assumed	No	M	3,000
28	Green 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	500
29	Blue 2" x 2" Ceramic Floor Tile	Throughout	Assumed	No	M	500
30	Marble Threshold	Throughout	Assumed	No	M	50
31	Wallpaper	Throughout	Assumed	Yes	S	5,000
32	Brick	Throughout	Assumed	No	M	100,000
33	Mortar for Brick		Assumed	No	M	
34	White w/Black 12" x 12" Vinyl Floor Tile (VCT)	Throughout	Assumed	No	M	2,000
35	Mastic for White w/Black 12" x 12" Vinyl Floor Tile (VCT)		Assumed	No	M	
36	Interior Caulking	Throughout	Assumed	No	M	100
37	Exterior Caulking	Throughout	Assumed	No	M	100
38	Knockdown Drywall System	IDF Room	Assumed	No	M	1,500
39	Gray Sink Coating	Throughout	Assumed	No	M	75
40	Gray Carpet Square	Media Center IDF and Library Resource	Assumed	No	M	100
41	Mastic for Gray Carpet Square		Assumed	No	M	
42	Dark Gray Cove Base	Janitorial Supply Closet, Media Center IDF, and Library Resource	Assumed	No	M	20
43	Mastic for Dark Gray Cove Base		Assumed	No	M	
44	Beige Multicolored 12" x 12" Vinyl Floor Tile (VCT)	Janitorial Supply Closet	Assumed	No	M	750
45	Mastic for Beige Multicolored 12" x 12" VCT		Assumed	No	M	
46	Fiberglass Reinforced Plastic (FRP)	Throughout	Assumed	No	M	500
47	Mastic for Fiberglass Reinforced Plastic (FRP)		Assumed	No	M	
48	Terrazzo Mop Sink	Throughout	Assumed	No	M	50
49	Unfinished Drywall System	Above Ceiling	Assumed	No	M	10,000

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

Dominion Environmental Consultants, Inc.
AHERA Suspect ACBM Homogeneous Building Materials Inventory List

Dominion Project Number(s): AZ0959.3201AZ1418.57	Client: Kyrene Elementary School District
Inspection Date(s): 09/27/22+06/11/25	Site: Kyrene Middle School - Building K

Homogeneous Material #	Material Description	Location(s)	ACBM Yes/No/ Assumed	Friable Yes/No	Material Category	Approximate Quantity (sq. ft.)
50	Silver Flex Duct Wrap	Above Ceiling	Assumed	No	M	2,000
51	Silver Box Duct Wrap	Above Ceiling	Assumed	No	M	2,000
52	Black Pipe Foam Insulation	Above Ceiling	Assumed	No	M	100
53	Pipe Wrap	Above Ceiling	Assumed	No	M	300
54	Mastic for Pipe Wrap		Assumed	No	M	
55	Gray Duct Mastic	Above Ceiling	Assumed	No	M	100
56	Skylight Insulation Panel	Above Ceiling	Assumed	No	M	2,000

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

KEY:
S = Surfacing
M = Miscellaneous
TSI = Thermal System Insulation

SECTION 6

♦

PLM BULK
SAMPLE SHEETS

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.04+AZ1418.11+AZ1418.57	**Client: Kyrene Elementary School District**
Sample Date(s): 06/08/17+03/13/24+06/25/25	**Site: Kyrene Middle School - Building E/L**

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 06/08/2017 - AHERA Building Inspector: Krista Wahnefried (Certification #25511-2447693-311078)					
AZ1418.04- PLM-1	1	Blue Cove Base	Band Hall - Southwest Corner	Convenient	None Detected
	2	White Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.04- PLM-2	1	Blue Cove Base	Hall Outside Restroom - Southeast Corner	Convenient	None Detected
	2	White Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.04- PLM-3	1	Blue Cove Base	Band Hall - Southeast Corner	Convenient	None Detected
	2	White Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.04- PLM-4	3	Orange Peel Drywall System - White Paint	Band Hall - Southwest Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.04- PLM-5	3	Orange Peel Drywall System - White Paint	Hall Outside Restroom - Southeast Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.04- PLM-6	3	Orange Peel Drywall System - White Paint	Band Hall - Southeast Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.04- PLM-7	4	White Fiberglass Reinforced Plastic (FRP)	Janitorial Closet - Northwest	Convenient	None Detected
	5	Yellow Mastic for White Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected
AZ1418.04- PLM-8	4	White Fiberglass Reinforced Plastic (FRP)	Janitorial Closet - Northwest	Convenient	None Detected
	5	Yellow Mastic for White Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.04+AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Sample Date(s): 06/08/17+03/13/24+06/25/25	Site: Kyrene Middle School - Building E/L

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.04- PLM-9	4	White Fiberglass Reinforced Plastic (FRP)	Janitorial Closet - Northwest	Convenient	None Detected
	5	Yellow Mastic for White Fiberglass Reinforced Plastic (FRP)		Convenient	None Detected
AZ1418.04- PLM-10	6	White 4" x 4" Ceramic Wall Tile	Restroom - West	Convenient	None Detected
	7	Off-White Grout for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
	8	Yellow Mastic for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ1418.04- PLM-11	6	White 4" x 4" Ceramic Wall Tile	Restroom - Northwest Corner	Convenient	None Detected
	7	Off-White Grout for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
	8	Yellow Mastic for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ1418.04- PLM-12	6	White 4" x 4" Ceramic Wall Tile	Restroom - Northeast	Convenient	None Detected
	7	Off-White Grout for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
	8	Yellow Mastic for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
Sample Date: 03/13/2024 - AHERA Building Inspector: Tracey Carpenter (Certification #4644-14588-090523)					
AZ1418.11-PLM 13	9	2" x 2" White Ceramic Floor Tile	Room Near Boy's Restroom - Northwest Corner	Convenient	None Detected
	10	Off-White Grout for 2" x 2" White Ceramic Floor Tile		Convenient	None Detected
	11	Gray Thinset for 2" x 2" White Ceramic Floor Tile		Convenient	None Detected
AZ1418.11-PLM 14	9	2" x 2" White Ceramic Floor Tile	Boy's Restroom - Southwest Corner	Convenient	None Detected
	10	Off-White Grout for 2" x 2" White Ceramic Floor Tile		Convenient	None Detected
	11	Gray Thinset for 2" x 2" White Ceramic Floor Tile		Convenient	None Detected
AZ1418.11-PLM 15	9	2" x 2" White Ceramic Floor Tile	Room Near Boy's Restroom - Center - East	Convenient	None Detected
	10	Off-White Grout for 2" x 2" White Ceramic Floor Tile		Convenient	None Detected
	11	Gray Thinset for 2" x 2" White Ceramic Floor Tile		Convenient	None Detected
AZ1418.11-PLM 16	12	Black Cove Base	Gymnasium - Southeast	Convenient	None Detected
	13	Beige Mastic for Black Cove Base		Convenient	None Detected
AZ1418.11-PLM 17	12	Black Cove Base	Gymnasium - South	Convenient	None Detected
	13	Beige Mastic for Black Cove Base		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.04+AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Sample Date(s): 06/08/17+03/13/24+06/25/25	Site: Kyrene Middle School - Building E/L

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.11-PLM 18	12	Black Cove Base	Gymnasium - Southwest	Convenient	None Detected
	13	Beige Mastic for Black Cove Base		Convenient	None Detected
AZ1418.11-PLM 19	14	Dark Teal Ceramic Bench Tiles	Girl's Locker Room - Center - Southeast	Convenient	None Detected
	15	Blue-Green Grout for Dark Teal Ceramic Bench Tiles		Convenient	None Detected
	16	Gray Thinset for Dark Teal Ceramic Bench Tiles		Convenient	None Detected
AZ1418.11-PLM 20	14	Dark Teal Ceramic Bench Tiles	Girl's Locker Room - Northwest	Convenient	None Detected
	15	Blue-Green Grout for Dark Teal Ceramic Bench Tiles		Convenient	None Detected
	16	Gray Thinset for Dark Teal Ceramic Bench Tiles		Convenient	None Detected
AZ1418.11-PLM 21	14	Dark Teal Ceramic Bench Tiles	Boy's Locker Room - North	Convenient	None Detected
	15	Blue-Green Grout for Dark Teal Ceramic Bench Tiles		Convenient	None Detected
	16	Gray Thinset for Dark Teal Ceramic Bench Tiles		Convenient	None Detected
AZ1418.11-PLM 22	17	Light Teal Ceramic Bench Tiles	Boy's Locker Room - Southwest	Convenient	None Detected
	18	Blue-Green Grout for Light Teal Ceramic Bench Tiles		Convenient	None Detected
	19	Gray Thinset for Light Teal Ceramic Bench Tiles		Convenient	None Detected
AZ1418.11-PLM 23	17	Light Teal Ceramic Bench Tiles	Boy's Locker Room - Southwest	Convenient	None Detected
	18	Blue-Green Grout for Light Teal Ceramic Bench Tiles		Convenient	None Detected
	19	Gray Thinset for Light Teal Ceramic Bench Tiles		Convenient	None Detected
AZ1418.11-PLM 24	17	Light Teal Ceramic Bench Tiles	Girl's Locker Room - Center - Southeast	Convenient	None Detected
	18	Blue-Green Grout for Light Teal Ceramic Bench Tiles		Convenient	None Detected
	19	Gray Thinset for Light Teal Ceramic Bench Tiles		Convenient	None Detected
Sample Date: 06/16/2025 - AHERA Building Inspector: Nick Marcos (Certification #4644-8873-031325)					
AZ1418.57-PLM-25	20	Gray Multicolored Carpet Square	Room East of L102 - Northwest	Convenient	None Detected
	21	Transparent Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
AZ1418.57-PLM-26	20	Gray Multicolored Carpet Square	Room L105 - West	Convenient	None Detected
	21	Transparent Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
AZ1418.57-PLM-27	20	Gray Multicolored Carpet Square	Room L103 - West	Convenient	None Detected
	21	Transparent Mastic for Gray Multicolored Carpet Square		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.04+AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Sample Date(s): 06/08/17+03/13/24+06/25/25	Site: Kyrene Middle School - Building E/L

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.57-PLM-28	22	Black Carpet Square	Room L102 - Southwest	Convenient	None Detected
	23	Transparent Mastic for Black Carpet Square		Convenient	None Detected
AZ1418.57-PLM-29	22	Black Carpet Square	Hall to PE - Northwest	Convenient	None Detected
	23	Transparent Mastic for Black Carpet Square		Convenient	None Detected
AZ1418.57-PLM-30	22	Black Carpet Square	Room L102 - Northwest	Convenient	None Detected
	23	Transparent Mastic for Black Carpet Square		Convenient	None Detected
AZ1418.57-PLM-31	24	Blue Cove Base	Room L102 - Southeast	Convenient	None Detected
	25	Tan Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.57-PLM-32	24	Blue Cove Base	Room L104 - Southwest	Convenient	None Detected
	25	Tan Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.57-PLM-33	24	Blue Cove Base	Hallway South of Boy's RR - North	Convenient	None Detected
	25	Tan Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.57-PLM-34	26	2' x 2' Gray Ceiling Tile	Room L102 - Center	Convenient	None Detected
AZ1418.57-PLM-35		2' x 2' Gray Ceiling Tile	Hall to PE - Southwest	Convenient	None Detected
AZ1418.57-PLM-36		2' x 2' Gray Ceiling Tile	Room L105 - Center - East	Convenient	None Detected
AZ1418.57-PLM-37	27	2' x 4' Gray Ceiling Tile	Room L100 - Southwest	Convenient	None Detected
AZ1418.57-PLM-38		2' x 4' Gray Ceiling Tile	Weight Room - Northwest	Convenient	None Detected
AZ1418.57-PLM-39		2' x 4' Gray Ceiling Tile	Weight Room - Southwest	Convenient	None Detected
AZ1418.57-PLM-40	28	Orange Peel Drywall System - White Paint	Room East of L102 - Northeast Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.57-PLM-41	28	Orange Peel Drywall System - White Paint	Hall East of Room L102 - South	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.04+AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Sample Date(s): 06/08/17+03/13/24+06/25/25	Site: Kyrene Middle School - Building E/L

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.57-PLM-42	28	Orange Peel Drywall System - White Paint	Room L105 - Northeast	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ0959.2056+AZ1418.57	Client: Kyrene Elementary School District
Sample Date(s): 02/06/19+06/16/25	Site: Kyrene Middle School - Building F

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 02/06/2019 - AHERA Building Inspector: Xin Lou (Certification #G9017)					
AZ0959.2056- PLM-1	1	White Cabinet Caulking	Room F207 - Southwest	Convenient	None Detected
	2	Green Paint for White Cabinet Caulking		Convenient	None Detected
AZ0959.2056- PLM-2	1	White Cabinet Caulking	Room F207 - South	Convenient	None Detected
	2	Green Paint for White Cabinet Caulking		Convenient	None Detected
AZ0959.2056- PLM-3	1	White Cabinet Caulking	Room F207 - Southwest	Convenient	None Detected
	2	Green Paint for White Cabinet Caulking		Convenient	None Detected
AZ0959.2056- PLM-4	3	Blue Cove Base	Room F207 - Southwest	Convenient	None Detected
	4	White Mastic for Blue Cove Base		Convenient	None Detected
AZ0959.2056- PLM-5	3	Blue Cove Base	Room F207 - Southeast	Convenient	None Detected
	4	White Mastic for Blue Cove Base		Convenient	None Detected
AZ0959.2056- PLM-6	3	Blue Cove Base	Room F207 - Southwest	Convenient	None Detected
	4	White Mastic for Blue Cove Base		Convenient	None Detected
AZ0959.2056- PLM-7	5	Orange Peel Drywall System - White Paint	Room F207 - Southwest Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ0959.2056- PLM-8	5	Orange Peel Drywall System - White Paint	Room F207 - South	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ0959.2056- PLM-9	5	Orange Peel Drywall System - White Paint	Room F207 - Southeast	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ0959.2056+AZ1418.57	**Client: Kyrene Elementary School District**
Sample Date(s): 02/06/19+06/16/25	**Site: Kyrene Middle School - Building F**

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 06/16/2025 - AHERA Building Inspector: Nick Marcos (Certification #4644-8873-031325)					
AZ1418.57-PLM-1	6	Gray Multicolored Carpet Square	First Floor - Exterior of Rm F107 - West	Convenient	None Detected
	7	Semi-Transparent Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
AZ1418.57-PLM-2	6	Gray Multicolored Carpet Square	First Floor - Exterior of Rm F105 - Northwest	Convenient	None Detected
	7	Semi-Transparent Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
AZ1418.57-PLM-3	6	Gray Multicolored Carpet Square	Second Floor - Room F204 - Northwest Corner	Convenient	None Detected
	7	Semi-Transparent Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
AZ1418.57-PLM-4	8	Black Carpet Square	First Floor - Exterior of Rm F108 - Entryway	Convenient	None Detected
	9	Black Mastic for Black Carpet Square		Convenient	None Detected
AZ1418.57-PLM-5	8	Black Carpet Square	First Floor - Exterior of Rm F108 - West Entry	Convenient	None Detected
	9	Black Mastic for Black Carpet Square		Convenient	None Detected
AZ1418.57-PLM-6	8	Black Carpet Square	First Floor - Exterior of Rm F108 - East Entry	Convenient	None Detected
	9	Black Mastic for Black Carpet Square		Convenient	None Detected
AZ1418.57-PLM-7	10	Blue Cove Base	Second Floor - Room F206 - East Entry	Convenient	None Detected
	11	Cream Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.57-PLM-8	10	Blue Cove Base	First Floor - Room F101 Entry	Convenient	None Detected
	11	Cream Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.57-PLM-9	10	Blue Cove Base	First Floor - Room F108 - Southwest Corner	Convenient	None Detected
	11	Cream Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.57-PLM-10	12	Orange Peel Drywall System - White Paint	First Floor - Room F108 - North	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ0959.2056+AZ1418.57	Client: Kyrene Elementary School District
Sample Date(s): 02/06/19+06/16/25	Site: Kyrene Middle School - Building F

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.57-PLM-11	12	Orange Peel Drywall System - White Paint	Second Floor - Room F208 - Southeast Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.57-PLM-12	12	Orange Peel Drywall System - White Paint	First Floor - Hall Between F106 & F107 - F107 Exit	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.57-PLM-13	13	2' x 4' Gray Ceiling Tile	First Floor - Room F107 - Center - South	Convenient	None Detected
AZ1418.57-PLM-14		2' x 4' Gray Ceiling Tile	Second Floor - Room F205 - South	Convenient	None Detected
AZ1418.57-PLM-15		2' x 4' Gray Ceiling Tile	Second Floor - Room F203 - South	Convenient	None Detected
AZ1418.57-PLM-16	14	White w/Black 12" x 12" Vinyl Floor Tile (VCT)	Room E111 - Center	Convenient	None Detected
	15	Yellow Mastic for White w/Black 12" x 12" Vinyl Floor Tile (VCT)		Convenient	None Detected
AZ1418.57-PLM-17	14	White w/Black 12" x 12" Vinyl Floor Tile (VCT)	Room E110 - Center	Convenient	None Detected
	15	Yellow Mastic for White w/Black 12" x 12" Vinyl Floor Tile (VCT)		Convenient	None Detected
AZ1418.57-PLM-18	14	White w/Black 12" x 12" Vinyl Floor Tile (VCT)	Second Floor - Exterior of F201 & F202 - Center	Convenient	None Detected
	15	Yellow Mastic for White w/Black 12" x 12" Vinyl Floor Tile (VCT)		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ0959.2635+AZ1418.57	Client: Kyrene Elementary School District
Sample Date(s): 11/19/20+06/12/25	Site: Kyrene Middle School - Building G

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 11/19/20 - AHERA Building Inspector: Nick Marcos (Certification #4644-8873-040320)					
AZ0959.2635- PLM-1	1	Orange Peel Drywall System - White Paint	Room 107 - Southwest	Convenient	None Detected
		White Texture		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White/Tan Drywall		Convenient	None Detected
AZ0959.2635- PLM-2	1	Orange Peel Drywall System - White Paint	Room 107 - Southwest	Convenient	None Detected
		White Texture		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White/Tan Drywall		Convenient	None Detected
AZ0959.2635- PLM-3	1	Orange Peel Drywall System - White Paint	Room 207 - Southwest	Convenient	None Detected
		White Texture		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White/Tan Drywall		Convenient	None Detected
AZ0959.2635- PLM-4	2	2' x 4' White/Tan Ceiling Tile	Room 107 - Southwest	Convenient	None Detected
AZ0959.2635- PLM-5		2' x 4' White/Tan Ceiling Tile	Room 107 - Southwest	Convenient	None Detected
AZ0959.2635- PLM-6		2' x 4' White/Tan Ceiling Tile	Room 207 - Southwest	Convenient	None Detected
AZ0959.2635- PLM-7	3	White Counter Caulking	Room 107 - Southwest	Convenient	None Detected
AZ0959.2635- PLM-8		White Counter Caulking	Room 107 - Southwest	Convenient	None Detected
AZ0959.2635- PLM-9		White Counter Caulking	Room 207 - Southwest	Convenient	None Detected
AZ0959.2635- PLM-10	4	Blue Cove Base	Room 107 - Southwest	Convenient	None Detected
	5	Tan Mastic for Blue Cove Base		Convenient	None Detected
AZ0959.2635- PLM-11	4	Blue Cove Base	Room 107 - Southwest	Convenient	None Detected
	5	Tan Mastic for Blue Cove Base		Convenient	None Detected
AZ0959.2635- PLM-12	4	Blue Cove Base	Room 207 - Southwest	Convenient	None Detected
	5	Tan Mastic for Blue Cove Base		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ0959.2635+AZ1418.57			Client: Kyrene Elementary School District		
Sample Date(s): 11/19/20+06/12/25			Site: Kyrene Middle School - Building G		
Sample Number	**HM#**	**Material Description**	**Sample Location**	**Manner of Sampling**	**Asbestos Content**
Sample Date: 06/12/25 - AHERA Building Inspector: Nick Marcos (Certification #4644-8873-031325)					
AZ1418.57-PLM-13	6	2' x 4' Gray Ceiling Tile	Second Floor - Room G206 - South	Convenient	None Detected
AZ1418.57-PLM-14		2' x 4' Gray Ceiling Tile	First Floor - Exterior of Rm G105 - Northwest	Convenient	None Detected
AZ1418.57-PLM-15		2' x 4' Gray Ceiling Tile	First Floor - Exterior of Rm G107 - South	Convenient	None Detected
AZ1418.57-PLM-16	7	Orange Peel Drywall System - White Paint	First Floor - Room G108 - Northwest	Convenient	None Detected
		White Texture		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.57-PLM-17	7	Orange Peel Drywall System - White Paint	Second Floor - Room G208 - East Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.57-PLM-18	7	Orange Peel Drywall System - White Paint	First Floor - Hall Between Rm G106 & G107 - G106 Exit	Convenient	None Detected
		White Texture		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.57-PLM-19	8	Gray Multicolored Carpet Square	Second Floor - Room G204 - South	Convenient	None Detected
	9	Transparent Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
	10	Gray Leveling Compound for Carpet Square		Convenient	None Detected
	11	Orange Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
AZ1418.57-PLM-20	8	Gray Multicolored Carpet Square	First Floor - Room G102 - South	Convenient	None Detected
	9	Transparent Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
	10	Gray Leveling Compound for Carpet Square		Convenient	None Detected
	11	Orange Mastic for Gray Multicolored Carpet Square		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ0959.2635+AZ1418.57	Client: Kyrene Elementary School District
Sample Date(s): 11/19/20+06/12/25	Site: Kyrene Middle School - Building G

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.57-PLM-21	8	Gray Multicolored Carpet Square	First Floor - North of Girl's RR - North	Convenient	None Detected
	9	Transparent Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
	10	Gray Leveling Compound for Carpet Square		Convenient	None Detected
	11	Orange Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
AZ1418.57-PLM-22	12	Blue Cove Base	First Floor - Room G101 - Northwest Corner	Convenient	None Detected
	13	Tan Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.57-PLM-23	12	Blue Cove Base	Second Floor - Room G205 - South Corner	Convenient	None Detected
	13	Tan Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.57-PLM-24	12	Blue Cove Base	Second Floor - Room G207 - South	Convenient	None Detected
	13	Tan Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.57-PLM-25	14	Black Carpet Square	First Floor - Exterior of Rm G108 - South Entry	Convenient	None Detected
	15	Transparent Mastic for Black Carpet Square		Convenient	None Detected
	16	Gray Leveling Compound for Black Carpet Square		Convenient	None Detected
	17	Tan Mastic for Black Carpet Square		Convenient	None Detected
AZ1418.57-PLM-26	14	Black Carpet Square	First Floor - Exterior of Rm G108 - South Entry	Convenient	None Detected
	15	Transparent Mastic for Black Carpet Square		Convenient	None Detected
	16	Gray Leveling Compound for Black Carpet Square		Convenient	None Detected
	17	Tan Mastic for Black Carpet Square		Convenient	None Detected
AZ1418.57-PLM-27	14	Black Carpet Square	First Floor - Southeast Entry - North Corner	Convenient	None Detected
	15	Transparent Mastic for Black Carpet Square		Convenient	None Detected
	16	Gray Leveling Compound for Black Carpet Square		Convenient	None Detected
	18	Orange Mastic for Black Carpet Square		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Sample Date(s): 03/13/25+06/12/25	Site: Kyrene Middle School - Building H

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 03/13/24 - AHERA Building Inspector: Tracey Carpenter (Certification #4644-14588-090523)					
AZ1418.11- PLM-1	1	Orange Peel Drywall System - White Paint	Room H107 - Northeast	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Pink Drywall with Brown Paper		Convenient	None Detected
AZ1418.11- PLM-2	1	Orange Peel Drywall System - White Paint	Room H107 - Northwest	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
AZ1418.11- PLM-3	1	Orange Peel Drywall System - White Paint	Room H107 - East	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		Pink Drywall with Brown Paper		Convenient	None Detected
Sample Date: 06/12/25 - AHERA Building Inspector: Nick Marcos (Certification #4644-8873-031325)					
AZ1418.57-PLM-4	2	Gray Decorative 2' x 4' Ceiling Tile	First Floor - Exterior of H105 - South	Convenient	None Detected
AZ1418.57-PLM-5		Gray Decorative 2' x 4' Ceiling Tile	First Floor - Exterior of H107 - South	Convenient	None Detected
AZ1418.57-PLM-6		Gray Decorative 2' x 4' Ceiling Tile	First Floor - North of Girl's RR - Center	Convenient	None Detected
AZ1418.57-PLM-7	3	Gray 2' x 4' Ceiling Tile	Second Floor - Room H203 - Southeast	Convenient	None Detected
AZ1418.57-PLM-8		Gray 2' x 4' Ceiling Tile	Second Floor - Room H106 - Southeast	Convenient	None Detected
AZ1418.57-PLM-9		Gray 2' x 4' Ceiling Tile	First Floor - Room H107 - Southeast	Convenient	None Detected
AZ1418.57-PLM-10	4	Orange Peel Drywall System - White Paint	First Floor - Room 108 - West	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Sample Date(s): 03/13/25+06/12/25	Site: Kyrene Middle School - Building H

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.57-PLM-11	4	Orange Peel Drywall System - White Paint	Second Floor - Room H208 - Northeast Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.57-PLM-12	4	Orange Peel Drywall System - White Paint	First Floor - Hall Between Rms H106 & H107 - H106 Exit	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.57-PLM-13	5	Gray Multicolored Carpet Square	First Floor - Room H101 - Center - Southeast	Convenient	None Detected
	6	Gray Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
AZ1418.57-PLM-14	5	Gray Multicolored Carpet Square	First Floor - Northwest of Girl's RR - Center	Convenient	None Detected
	6	Gray Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
AZ1418.57-PLM-15	5	Gray Multicolored Carpet Square	Second Floor - Room H205 - Southeast	Convenient	None Detected
	6	Gray Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
AZ1418.57-PLM-16	7	Blue Cove Base	First Floor - Room H107 - Northwest Corner	Convenient	None Detected
	8	Cream Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.57-PLM-17	7	Blue Cove Base	Second Floor - North of Boy's RR - Center	Convenient	None Detected
	8	Cream Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.57-PLM-18	7	Blue Cove Base	Second Floor - Room H204 - Northeast Corner	Convenient	None Detected
	8	Cream Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.57-PLM-19	9	Black Carpet Square	First Floor - South Entry - Center	Convenient	None Detected
	10	Gray Mastic for Black Carpet Square		Convenient	None Detected
AZ1418.57-PLM-20	9	Black Carpet Square	First Floor - South Entry - Center	Convenient	None Detected
	10	Gray Mastic for Black Carpet Square		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Sample Date(s): 03/13/25+06/12/25	Site: Kyrene Middle School - Building H

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.57-PLM-21	9	Black Carpet Square	First Floor - Northeast Entry - Center	Convenient	None Detected
	10	Gray Mastic for Black Carpet Square		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Sample Date(s): 03/13/24+06/11/25	Site: Kyrene Middle School - Building J

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 03/13/24 - AHERA Building Inspector: Tracey Carpenter (Certification #4644-14588-090523)					
AZ1418.11- PLM-1	1	12" x 12" White w/Gray Specs Vinyl Floor Tile (VCT)	Hallway South of Rm J112 - Southeast	Convenient	None Detected
	2	Yellow Mastic for 12" x 12" White w/Gray Specs Vinyl Floor Tile (VCT)		Convenient	None Detected
AZ1418.11- PLM-2	1	12" x 12" White w/Gray Specs Vinyl Floor Tile (VCT)	Hallway South of Rm J112 - South	Convenient	None Detected
	2	Yellow Mastic for 12" x 12" White w/Gray Specs Vinyl Floor Tile (VCT)		Convenient	None Detected
AZ1418.11- PLM-3	1	12" x 12" White w/Gray Specs Vinyl Floor Tile (VCT)	Hallway South of Rm J112 - Southwest	Convenient	None Detected
	2	Yellow Mastic for 12" x 12" White w/Gray Specs Vinyl Floor Tile (VCT)		Convenient	None Detected
Sample Date: 06/11/25 - AHERA Building Inspector: Nick Marcos (Certification #4644-8873-031325)					
AZ1418.57- PLM-4	3	Old Brown 2' x 4' Ceiling Tile	Workroom - Center - North	Convenient	None Detected
AZ1418.57- PLM-5		Old Brown 2' x 4' Ceiling Tile	Staff Lounge - Northeast	Convenient	None Detected
AZ1418.57- PLM-6		Old Brown 2' x 4' Ceiling Tile	Room J113 - Center - South	Convenient	None Detected
AZ1418.57- PLM-7	4	New Brown 2' x 4' Ceiling Tile	Room J120 - Southwest	Convenient	None Detected
AZ1418.57- PLM-8		New Brown 2' x 4' Ceiling Tile	Room J120 - South	Convenient	None Detected
AZ1418.57- PLM-9		New Brown 2' x 4' Ceiling Tile	Room J119 - South	Convenient	None Detected
AZ1418.57- PLM-10	5	Gray Multicolored Carpet Square	Staff Lounge - Northwest	Convenient	None Detected
	6	Semi-Transparent Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
AZ1418.57- PLM-11	5	Gray Multicolored Carpet Square	Room J120 - Northeast	Convenient	None Detected
	6	Semi-Transparent Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
AZ1418.57- PLM-12	5	Gray Multicolored Carpet Square	Workroom - North	Convenient	None Detected
	6	Semi-Transparent Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
AZ1418.57- PLM-13	7	Black Cove Base	Staff Lounge - Northeast	Convenient	None Detected
	8	Cream Mastic for Black Cove Base		Convenient	None Detected
AZ1418.57- PLM-14	7	Black Cove Base	Staff Lounge - Southeast	Convenient	None Detected
	8	Cream Mastic for Black Cove Base		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ1418.11+AZ1418.57	Client: Kyrene Elementary School District
Sample Date(s): 03/13/24+06/11/25	Site: Kyrene Middle School - Building J

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.57- PLM-15	7	Black Cove Base	Room J120 - Southeast	Convenient	None Detected
	8	Cream Mastic for Black Cove Base		Convenient	None Detected
AZ1418.57- PLM-16	9	Black Carpet Square	Staff Lounge - North Entry	Convenient	None Detected
	10	Semi-Transparent Mastic for Black Carpet Square		Convenient	None Detected
AZ1418.57- PLM-17	9	Black Carpet Square	Workroom - South	Convenient	None Detected
	10	Semi-Transparent Mastic for Black Carpet Square		Convenient	None Detected
AZ1418.57- PLM-18	9	Black Carpet Square	Room J120 - Northeast Entry	Convenient	None Detected
	10	Semi-Transparent Mastic for Black Carpet Square		Convenient	None Detected
AZ1418.57- PLM-19	11	Orange Peel Drywall System - White Paint	Workroom Storage - Southeast Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.57- PLM-20	11	Orange Peel Drywall System - White Paint	Room J112 -Pantry - Northwest Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.57- PLM-21	11	Orange Peel Drywall System - White Paint	Room J113 - South Entry	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ0959.3201AZ1418.57	Client: Kyrene Elementary School District
Sample Date(s): 09/27/22+06/11/25	Site: Kyrene Middle School - Building K

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 09/27/22 - AHERA Building Inspector: Nick Marcos (Certification #4644-8873-032422)					
AZ0959.3201- PLM-1	1	White 4" x 4" Ceramic Wall Tile	Girl's Restroom By Media Center - Southwest	Convenient	None Detected
	2	Cream Mastic for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
	3	Gray Grout for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ0959.3201- PLM-2	1	White 4" x 4" Ceramic Wall Tile	Girl's Restroom By Media Center - South	Convenient	None Detected
	2	Cream Mastic for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
	3	Gray Grout for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ0959.3201- PLM-3	1	White 4" x 4" Ceramic Wall Tile	Girl's Restroom By Media Center - Southeast	Convenient	None Detected
	2	Cream Mastic for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
	3	Gray Grout for White 4" x 4" Ceramic Wall Tile		Convenient	None Detected
AZ0959.3201- PLM-4	4	Green 4" x 4" Ceramic Wall Tile	Girl's Restroom By Media Center - Southwest	Convenient	None Detected
AZ0959.3201- PLM-5		Green 4" x 4" Ceramic Wall Tile	Girl's Restroom By Media Center - South	Convenient	None Detected
AZ0959.3201- PLM-6		Green 4" x 4" Ceramic Wall Tile	Girl's Restroom By Media Center - Southeast	Convenient	None Detected
AZ0959.3201- PLM-7	5	Blue 4" x 4" Ceramic Wall Tile	Girl's Restroom By Media Center - Southwest	Convenient	None Detected
AZ0959.3201- PLM-8		Blue 4" x 4" Ceramic Wall Tile	Girl's Restroom By Media Center - South	Convenient	None Detected
AZ0959.3201- PLM-9		Blue 4" x 4" Ceramic Wall Tile	Girl's Restroom By Media Center - Southeast	Convenient	None Detected
AZ0959.3201- PLM-10	6	White Fixture Caulking	Boy's Restroom By Media Center - Northwest	Convenient	None Detected
AZ0959.3201- PLM-11		White Fixture Caulking	Boy's Restroom By Media Center - North	Convenient	None Detected
AZ0959.3201- PLM-12		White Fixture Caulking	Boy's Restroom By Media Center - North	Convenient	None Detected
AZ0959.3201- PLM-13	7	Greenboard Drywall	Boy's Restroom By Media Center - Northwest	Convenient	None Detected
	8	Cream Mastic for Greenboard Drywall		Convenient	None Detected
AZ0959.3201- PLM-14	7	Greenboard Drywall	Girl's Restroom By Media Center - South	Convenient	None Detected
	8	Cream Mastic for Greenboard Drywall		Convenient	None Detected
AZ0959.3201- PLM-15	7	Greenboard Drywall	Boy's Restroom By Media Center - North	Convenient	None Detected
	8	Cream Mastic for Greenboard Drywall		Convenient	None Detected
AZ0959.3201- PLM-16	9	White Counter Caulking		Convenient	None Detected
AZ0959.3201- PLM-17		White Counter Caulking	Boy's Restroom By Media Center - Northeast	Convenient	None Detected
AZ0959.3201- PLM-18		White Counter Caulking	Boy's Restroom By Media Center - Northeast	Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ0959.3201AZ1418.57	Client: Kyrene Elementary School District
Sample Date(s): 09/27/22+06/11/25	Site: Kyrene Middle School - Building K

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
Sample Date: 06/11/25 - AHERA Building Inspector: Nick Marcos (Certification #4644-8873-031325)					
AZ1418.57- PLM-19	10	Pink Batt Insulation	Computer Lab - Southwest	Convenient	None Detected
	11	Brown/Black Wrap for Pink Batt Insulation		Convenient	None Detected
AZ1418.57- PLM-20	10	Pink Batt Insulation	Computer Lab ISI - Center - Southwest	Convenient	None Detected
	11	Brown/Black Wrap for Pink Batt Insulation		Convenient	None Detected
AZ1418.57- PLM-21	10	Pink Batt Insulation	Media Workroom - Center	Convenient	None Detected
	11	Brown/Black Wrap for Pink Batt Insulation		Convenient	None Detected
AZ1418.57- PLM-22	12	2' x 4' Gray Ceiling Tile	Conference Room - North	Convenient	None Detected
AZ1418.57- PLM-23		2' x 4' Gray Ceiling Tile	Computer Lab - Southeast	Convenient	None Detected
AZ1418.57- PLM-24		2' x 4' Gray Ceiling Tile	Computer Lab ISI - Center - Northeast	Convenient	None Detected
AZ1418.57- PLM-25	13	2' x 2' Gray Ceiling Tile	Reception Area - Northwest Hall - Center	Convenient	None Detected
AZ1418.57- PLM-26		2' x 2' Gray Ceiling Tile	Reception Area - West Hall - Center	Convenient	None Detected
AZ1418.57- PLM-27		2' x 2' Gray Ceiling Tile	Reception Area - Southeast Hall - Center	Convenient	None Detected
AZ1418.57- PLM-28	14	Orange Peel Drywall System - White Paint	Computer Lab - Northwest Room - Northwest Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.57- PLM-29	14	Orange Peel Drywall System - White Paint	Prof Lib - Northwest Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected
AZ1418.57- PLM-30	14	Orange Peel Drywall System - White Paint	A/V - Northwest Corner	Convenient	None Detected
		White Texture		Convenient	None Detected
		Cream Tape		Convenient	None Detected
		White Joint Compound		Convenient	None Detected
		White Drywall with Brown Paper		Convenient	None Detected

Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

Dominion Environmental Consultants, Inc.
AHERA PLM Bulk Sample Summary

Dominion Project Number(s): AZ0959.3201AZ1418.57	Client: Kyrene Elementary School District
Sample Date(s): 09/27/22+06/11/25	Site: Kyrene Middle School - Building K

Sample Number	HM#	Material Description	Sample Location	Manner of Sampling	Asbestos Content
AZ1418.57- PLM-31	15	Gray Multicolored Carpet Square	Media Center - Northwest	Convenient	None Detected
	16	Transparent Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
	17	Gray Cementitious Material for Carpet Square		Convenient	None Detected
AZ1418.57- PLM-32	15	Gray Multicolored Carpet Square	Computer Lab ISI - Southeast	Convenient	None Detected
	16	Transparent Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
	17	Gray Cementitious Material for Carpet Square		Convenient	None Detected
AZ1418.57- PLM-33	15	Gray Multicolored Carpet Square	Computer Lab - Northwest	Convenient	None Detected
	16	Transparent Mastic for Gray Multicolored Carpet Square		Convenient	None Detected
	17	Gray Cementitious Material for Carpet Square		Convenient	None Detected
AZ1418.57- PLM-34	18	Blue Cove Base	Media Center - Northeast	Convenient	None Detected
	19	Tan Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.57- PLM-35	18	Blue Cove Base	Office 2 - Southwest Corner	Convenient	None Detected
	19	Tan Mastic for Blue Cove Base		Convenient	None Detected
AZ1418.57- PLM-36	18	Blue Cove Base	Supply 2 - Northeast	Convenient	None Detected
	19	Tan Mastic for Blue Cove Base		Convenient	None Detected


Inspector: Nick Marcos
Certificate Number: ON-4644-8873-031325
State: Arizona

DOMINION

SECTION 7

♦

PLM BULK SAMPLE LOCATION MAPS

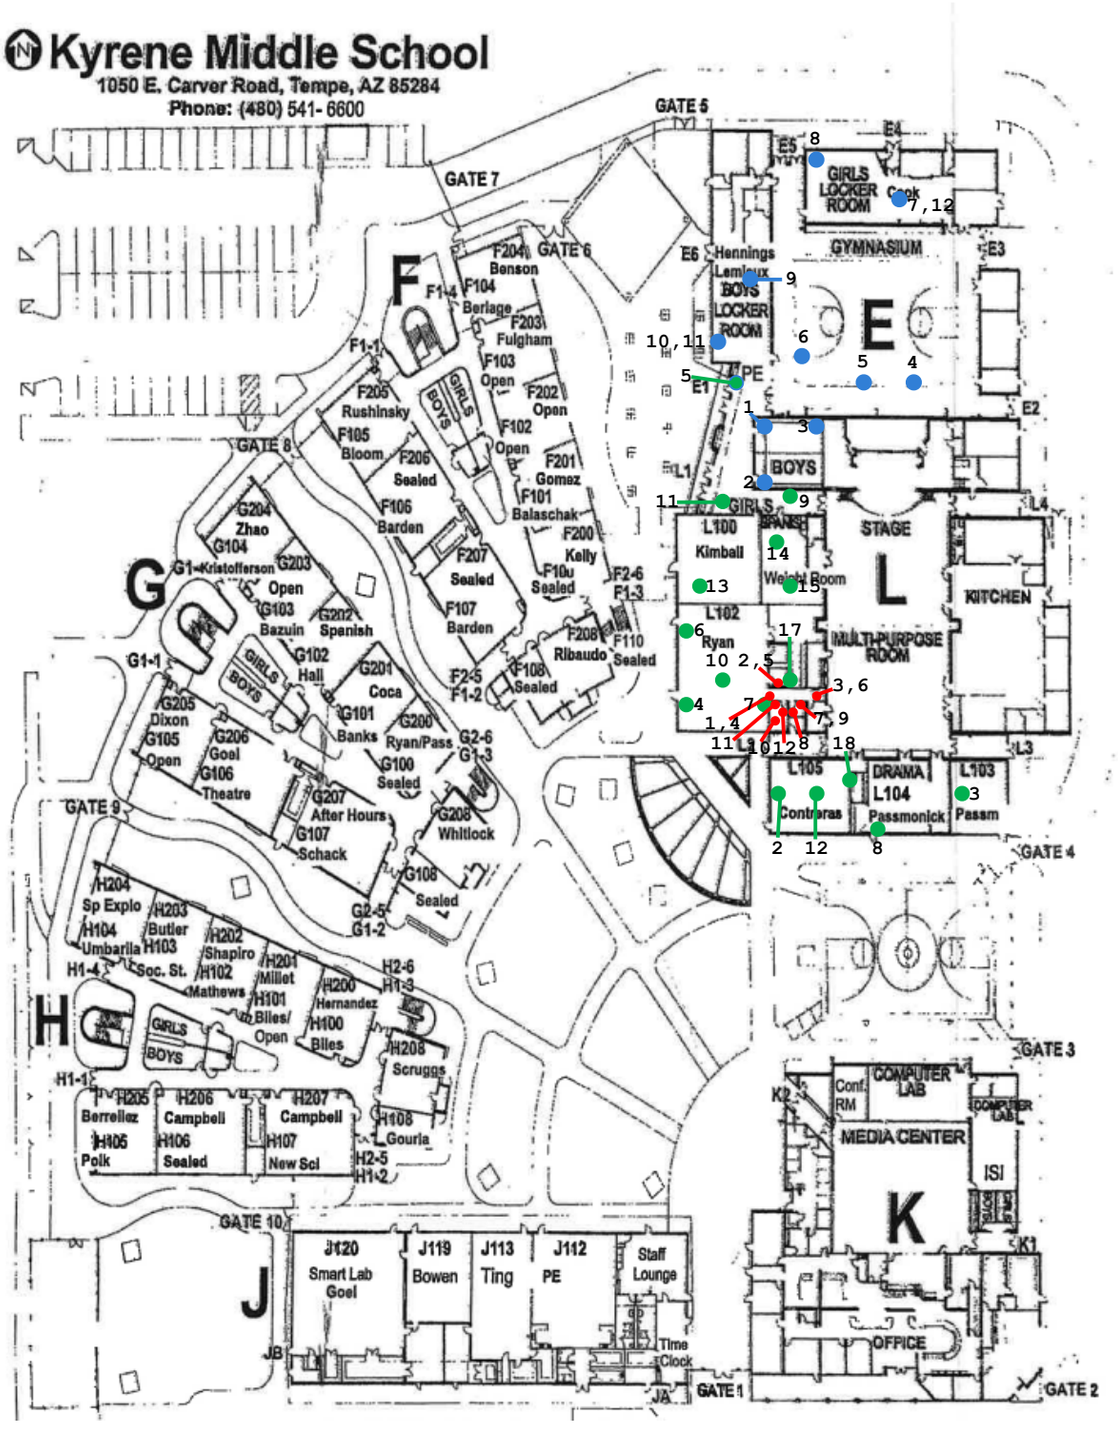


PLM Bulk Sample Location Map
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.11/AZ1418.57

Building E/L

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

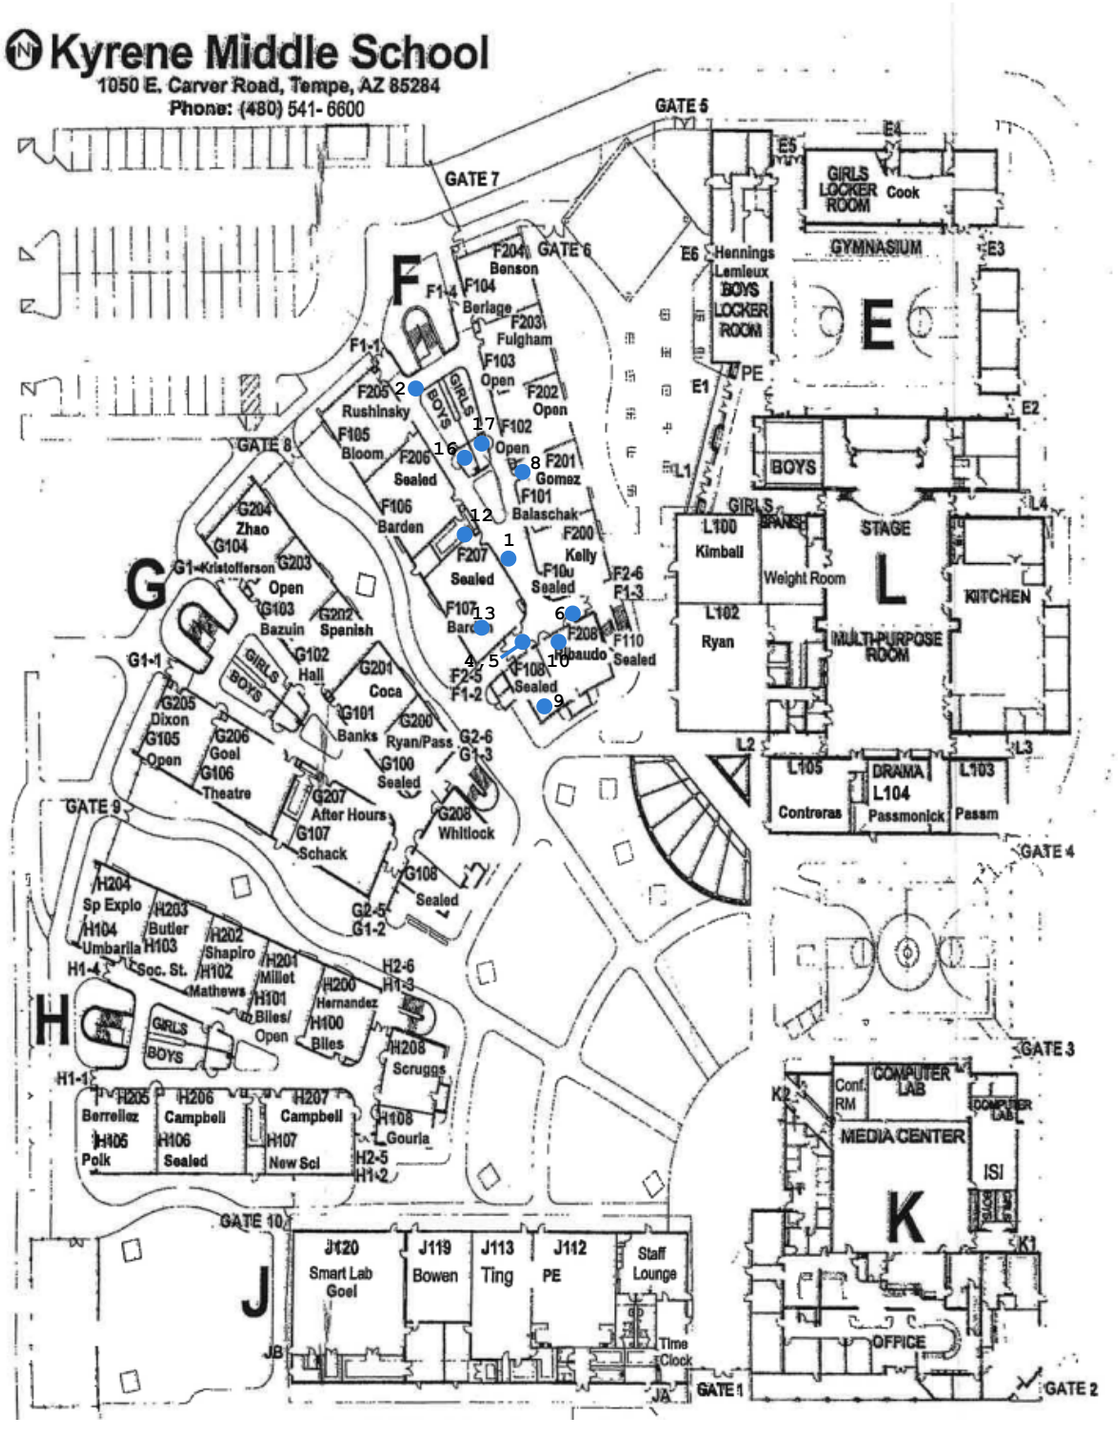

Sample dates:


- **February 6, 2019**
- **June 16, 2025**

PLM Bulk Sample Location Map (1)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.11/AZ1418.57

Building F - First Floor

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

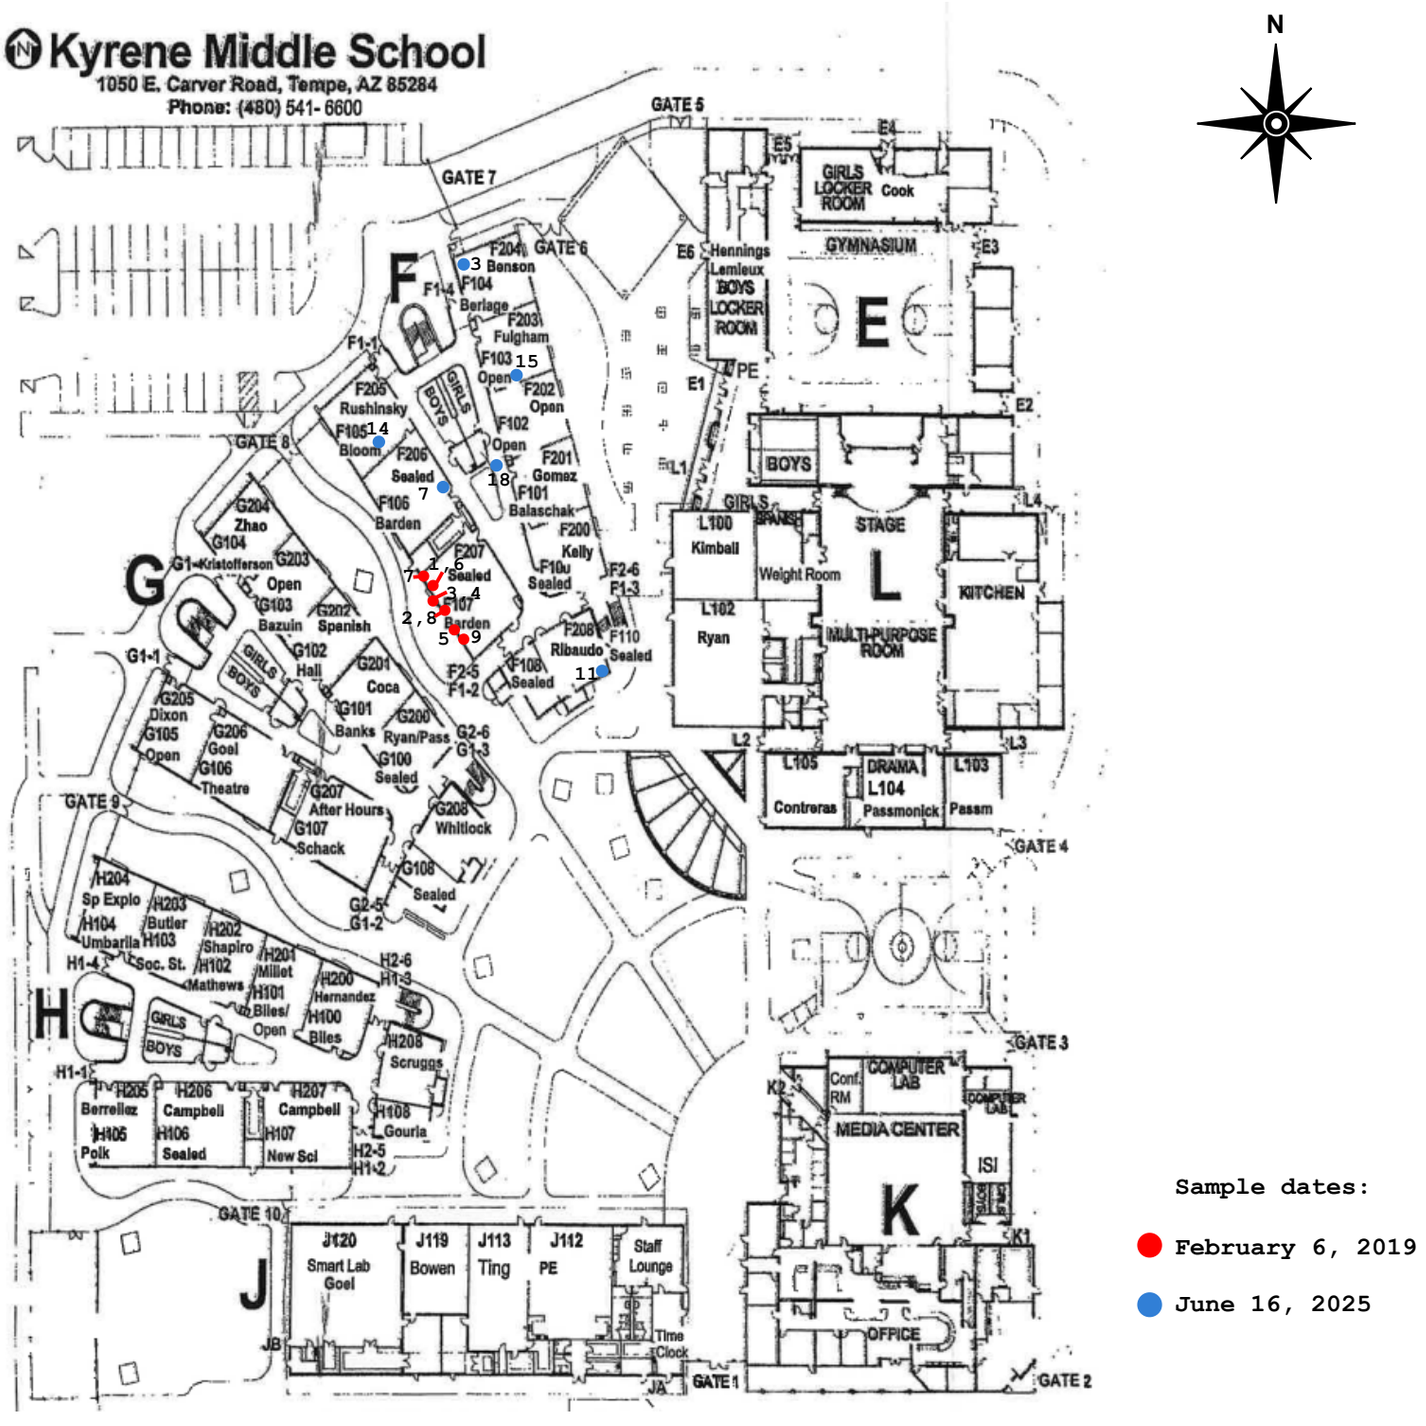


PLM Bulk Sample Location Map (2)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.11/AZ1418.57

Building F - Second Floor


Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

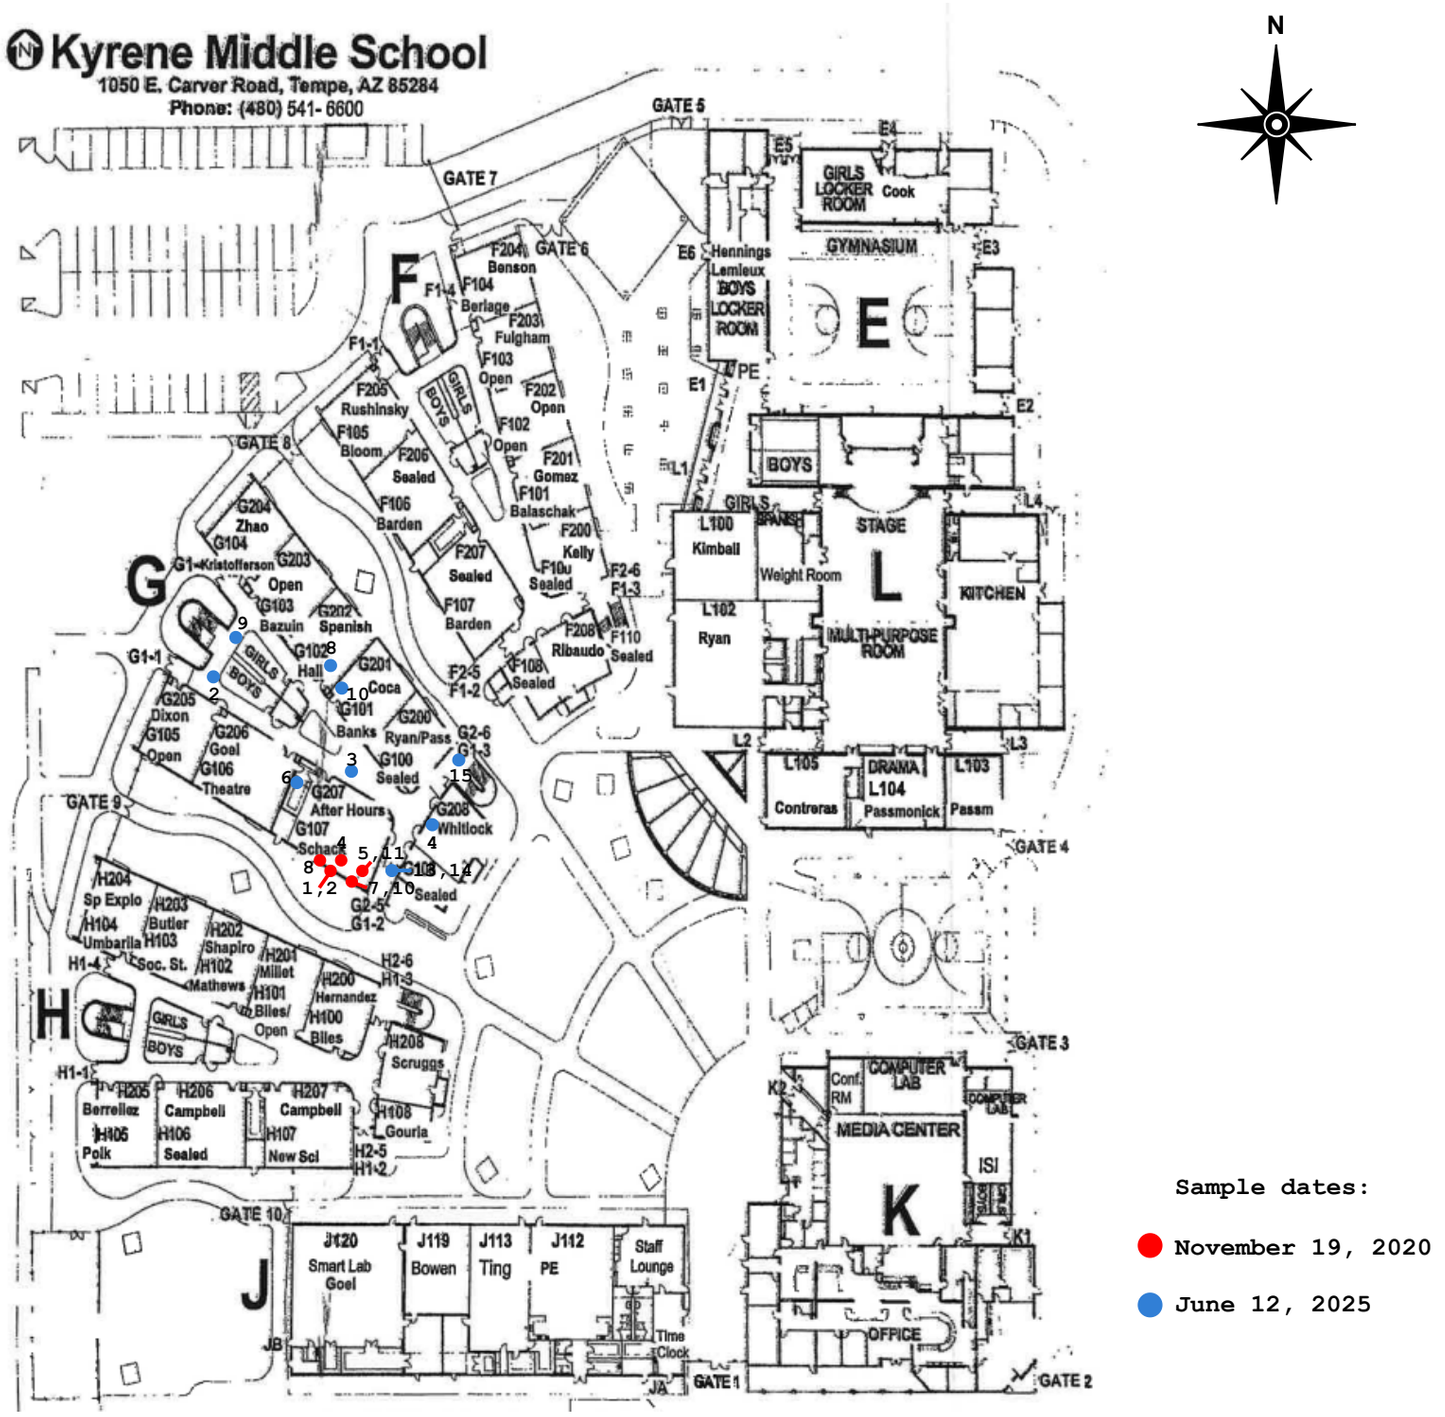

PLM Bulk Sample Location Map (1)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ0959.2635/AZ1418.57
Building G - First Floor

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

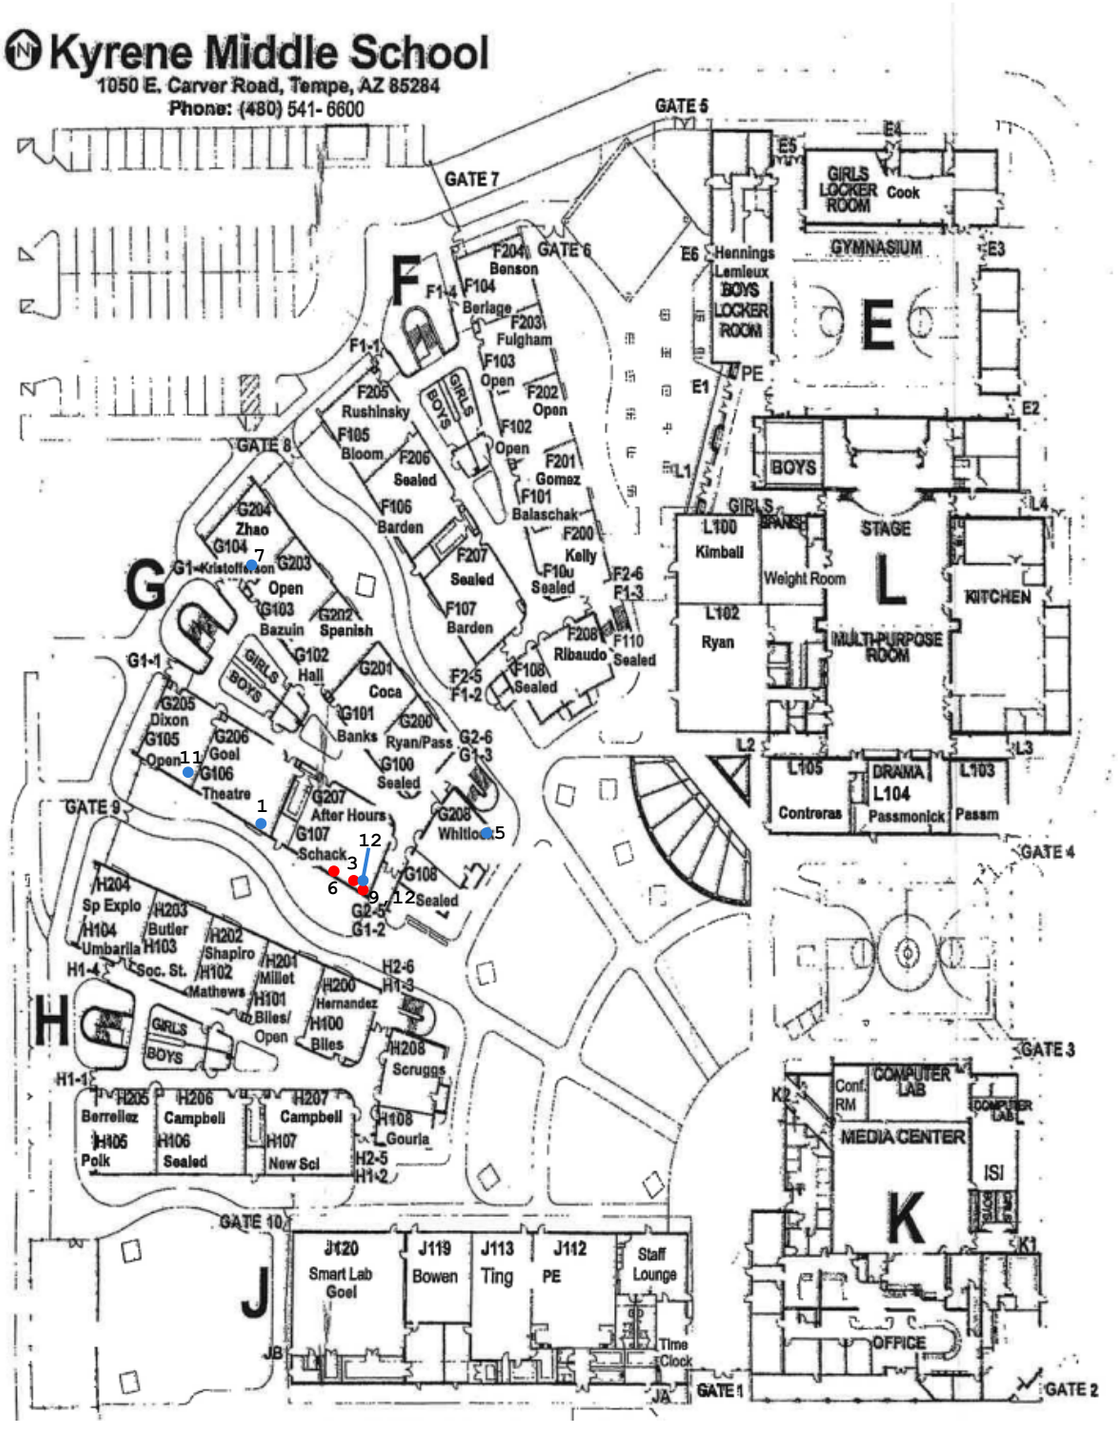


PLM Bulk Sample Location Map (2)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ0959.2635/AZ1418.57

Building G - Second Floor

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

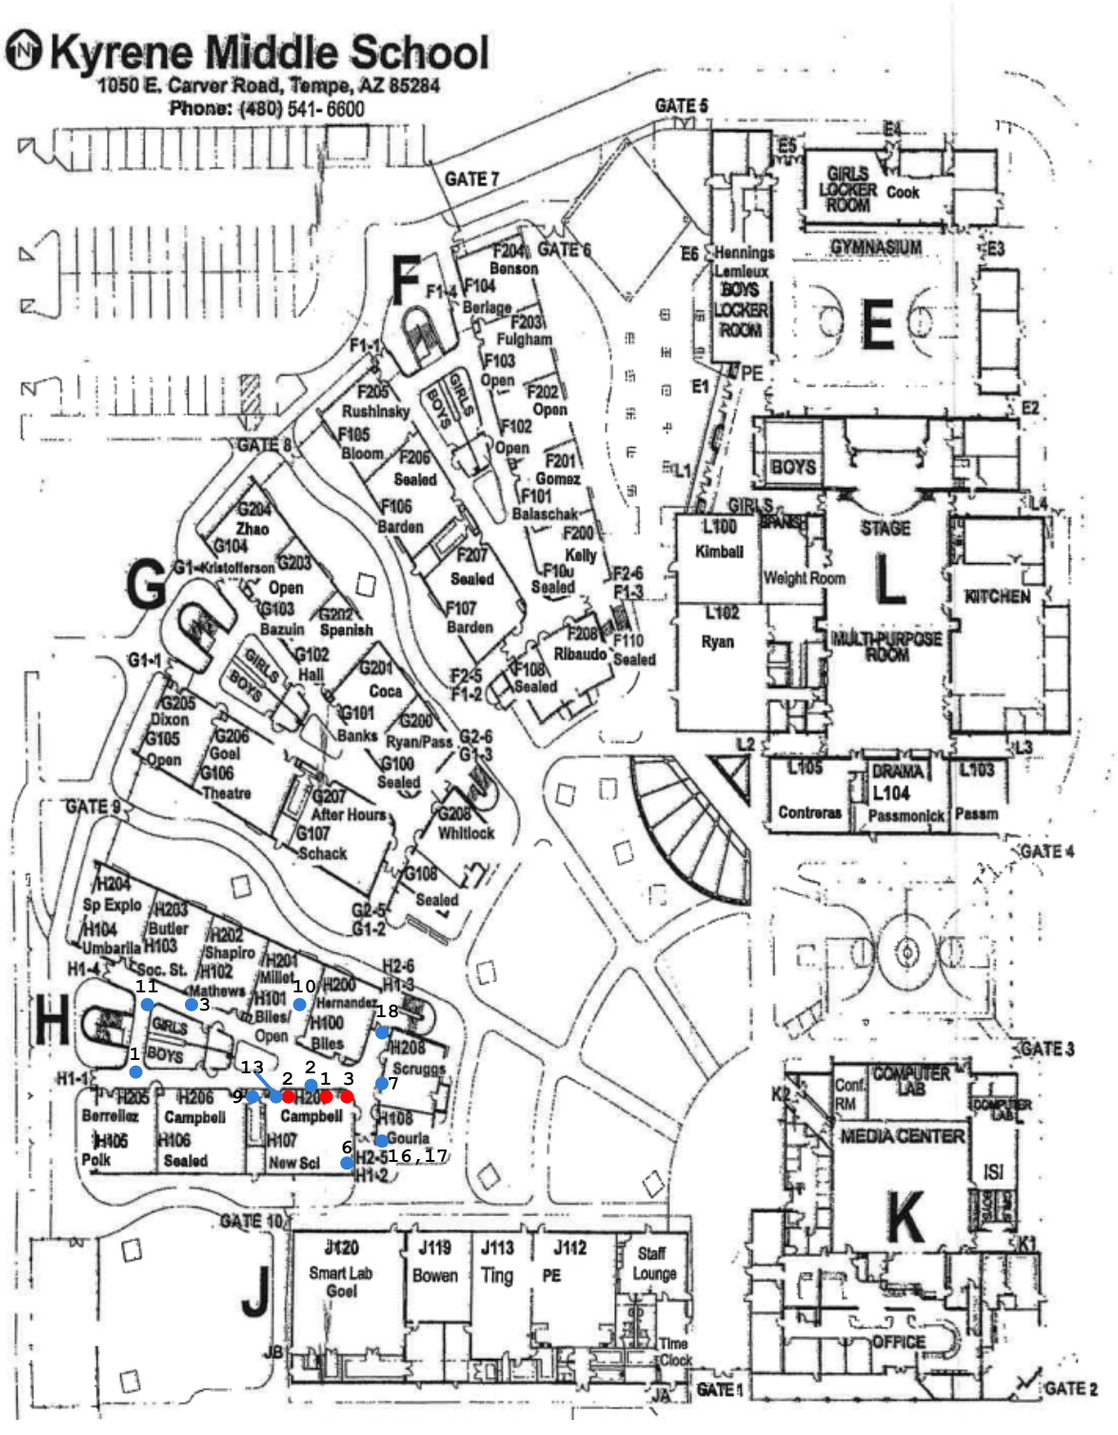


PLM Bulk Sample Location Map (1)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.11/AZ1418.57

Building H - First Floor


Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

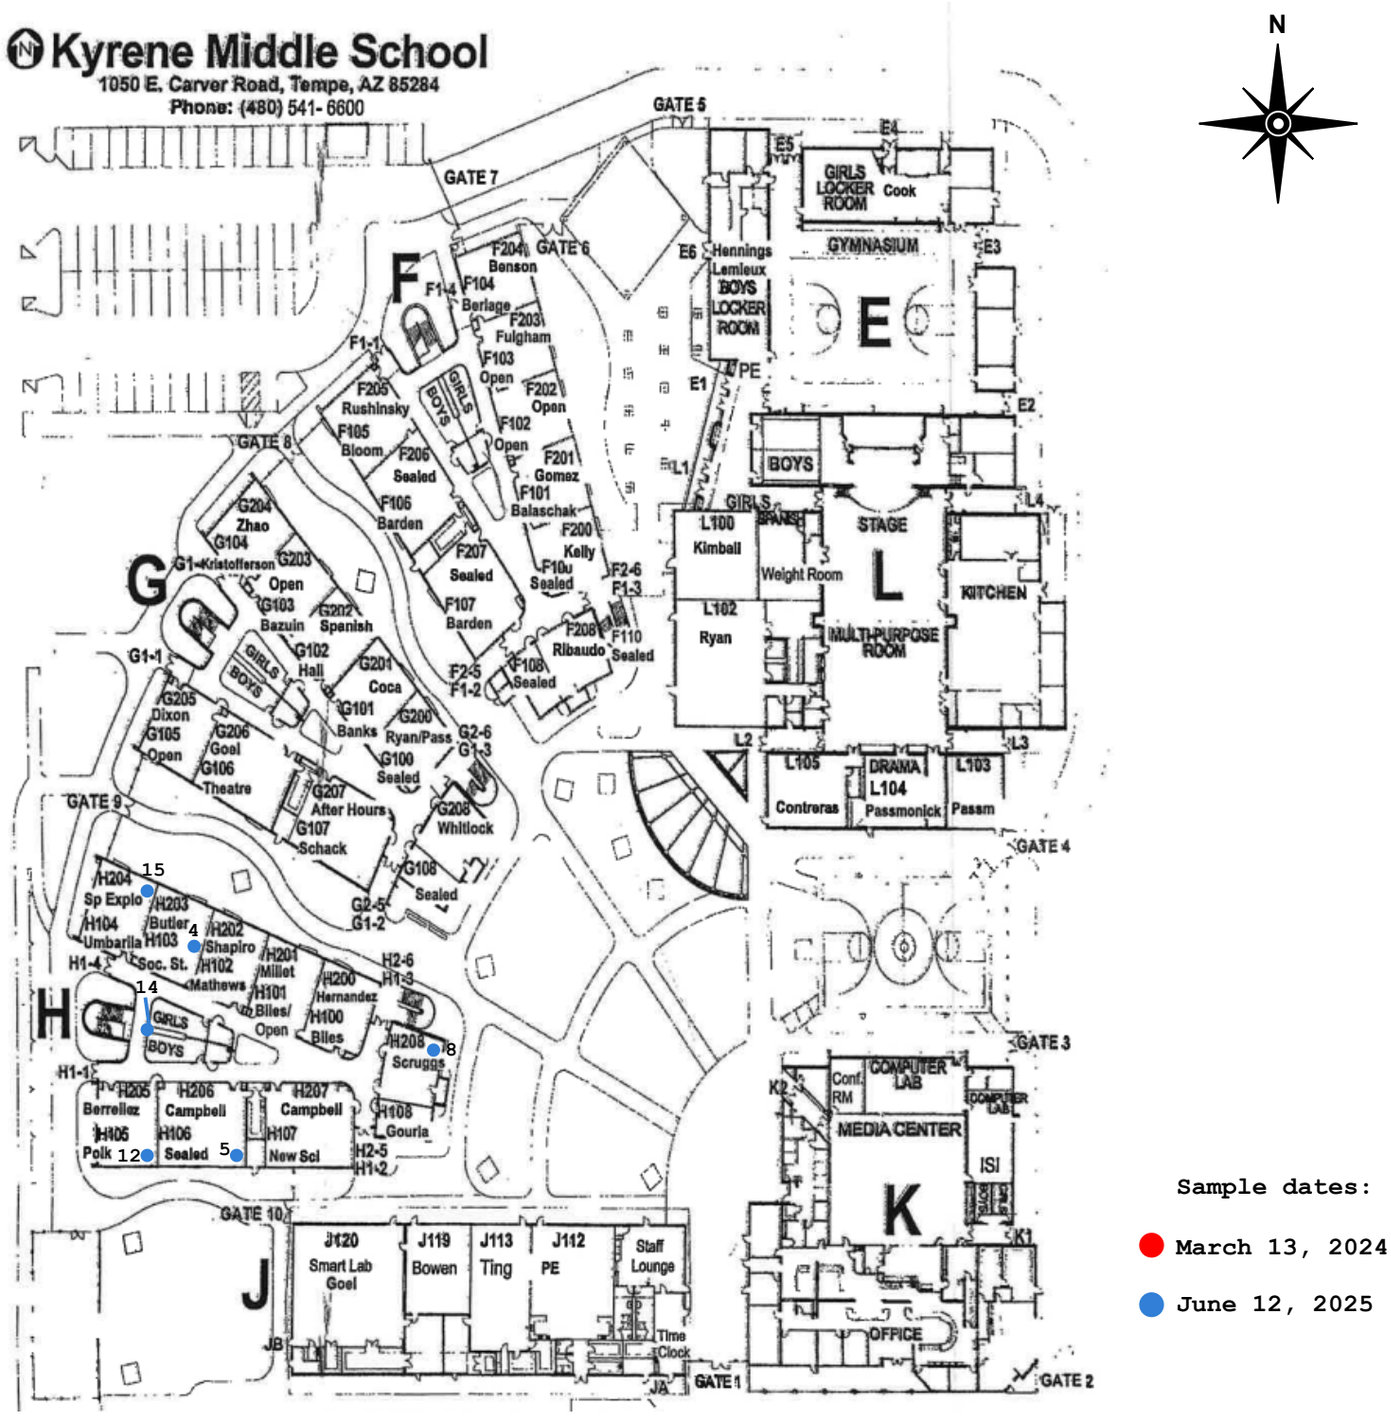

PLM Bulk Sample Location Map (2)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.11/AZ1418.57
Building H - Second Floor

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

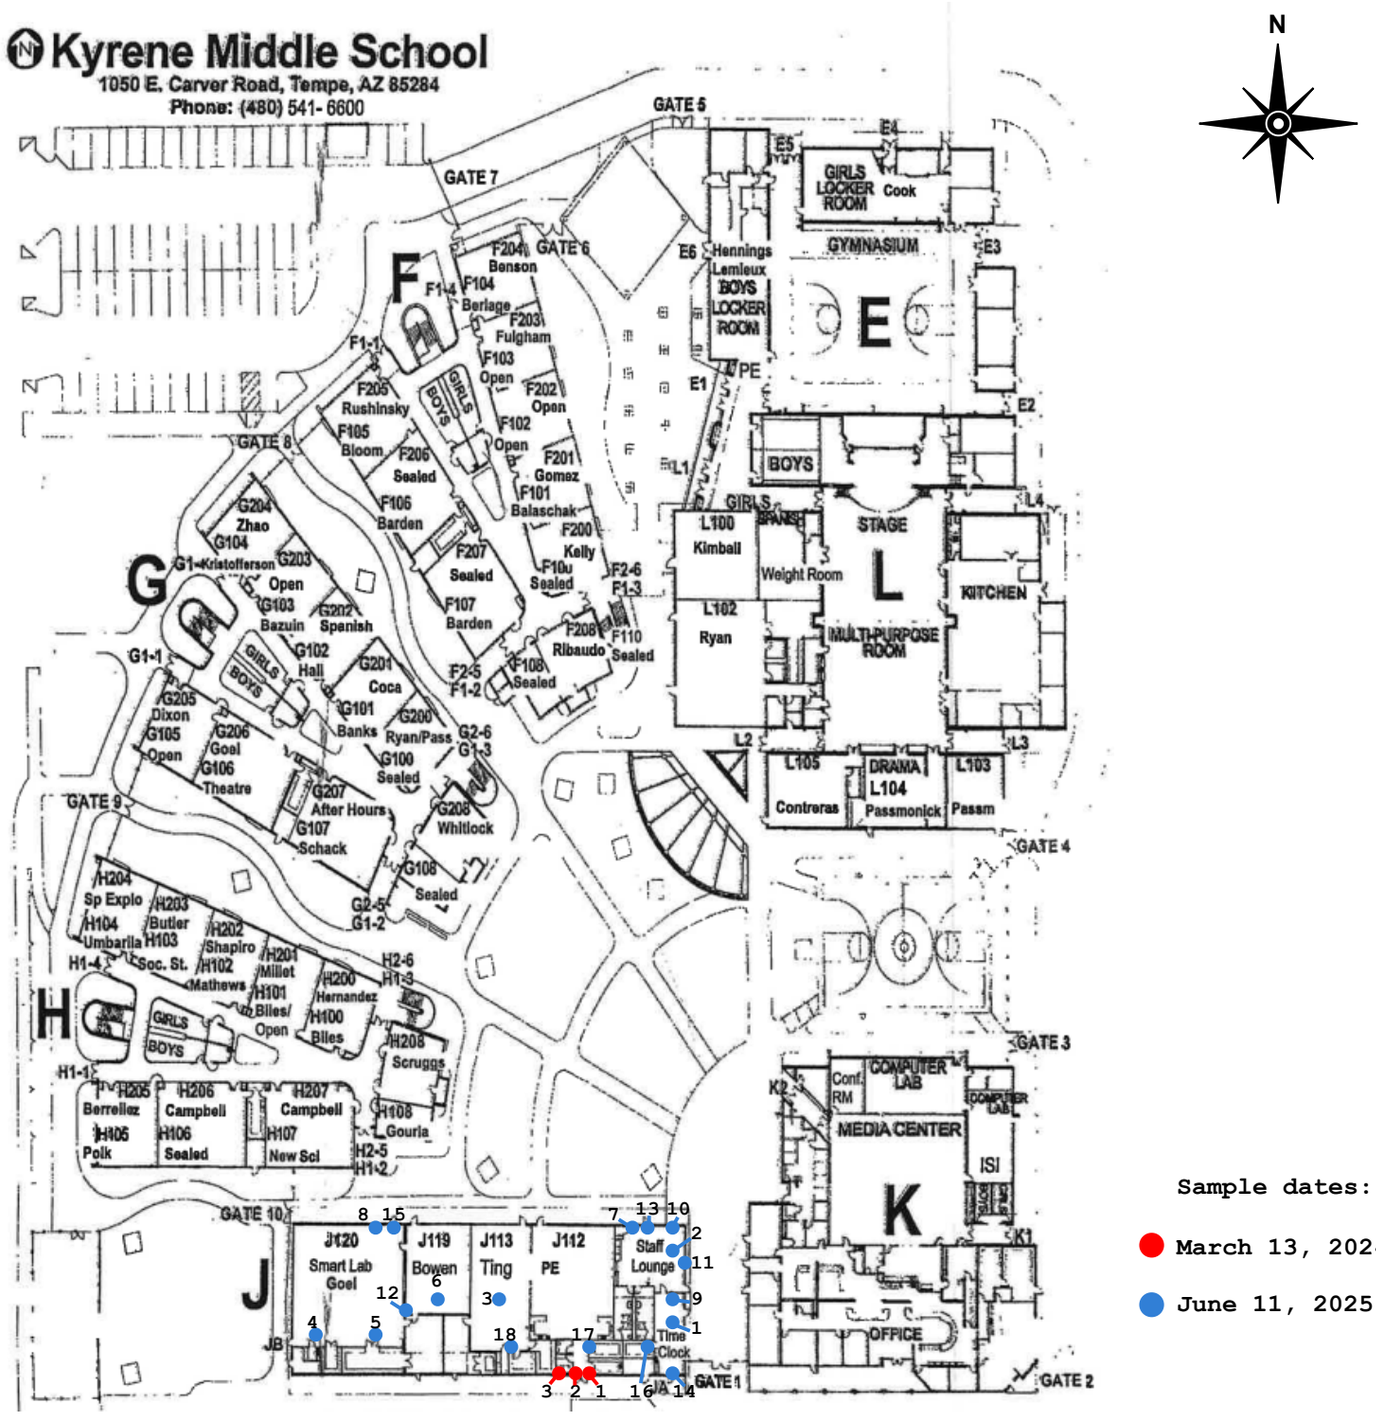


PLM Bulk Sample Location Map
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.11/AZ1418.57

Building J

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

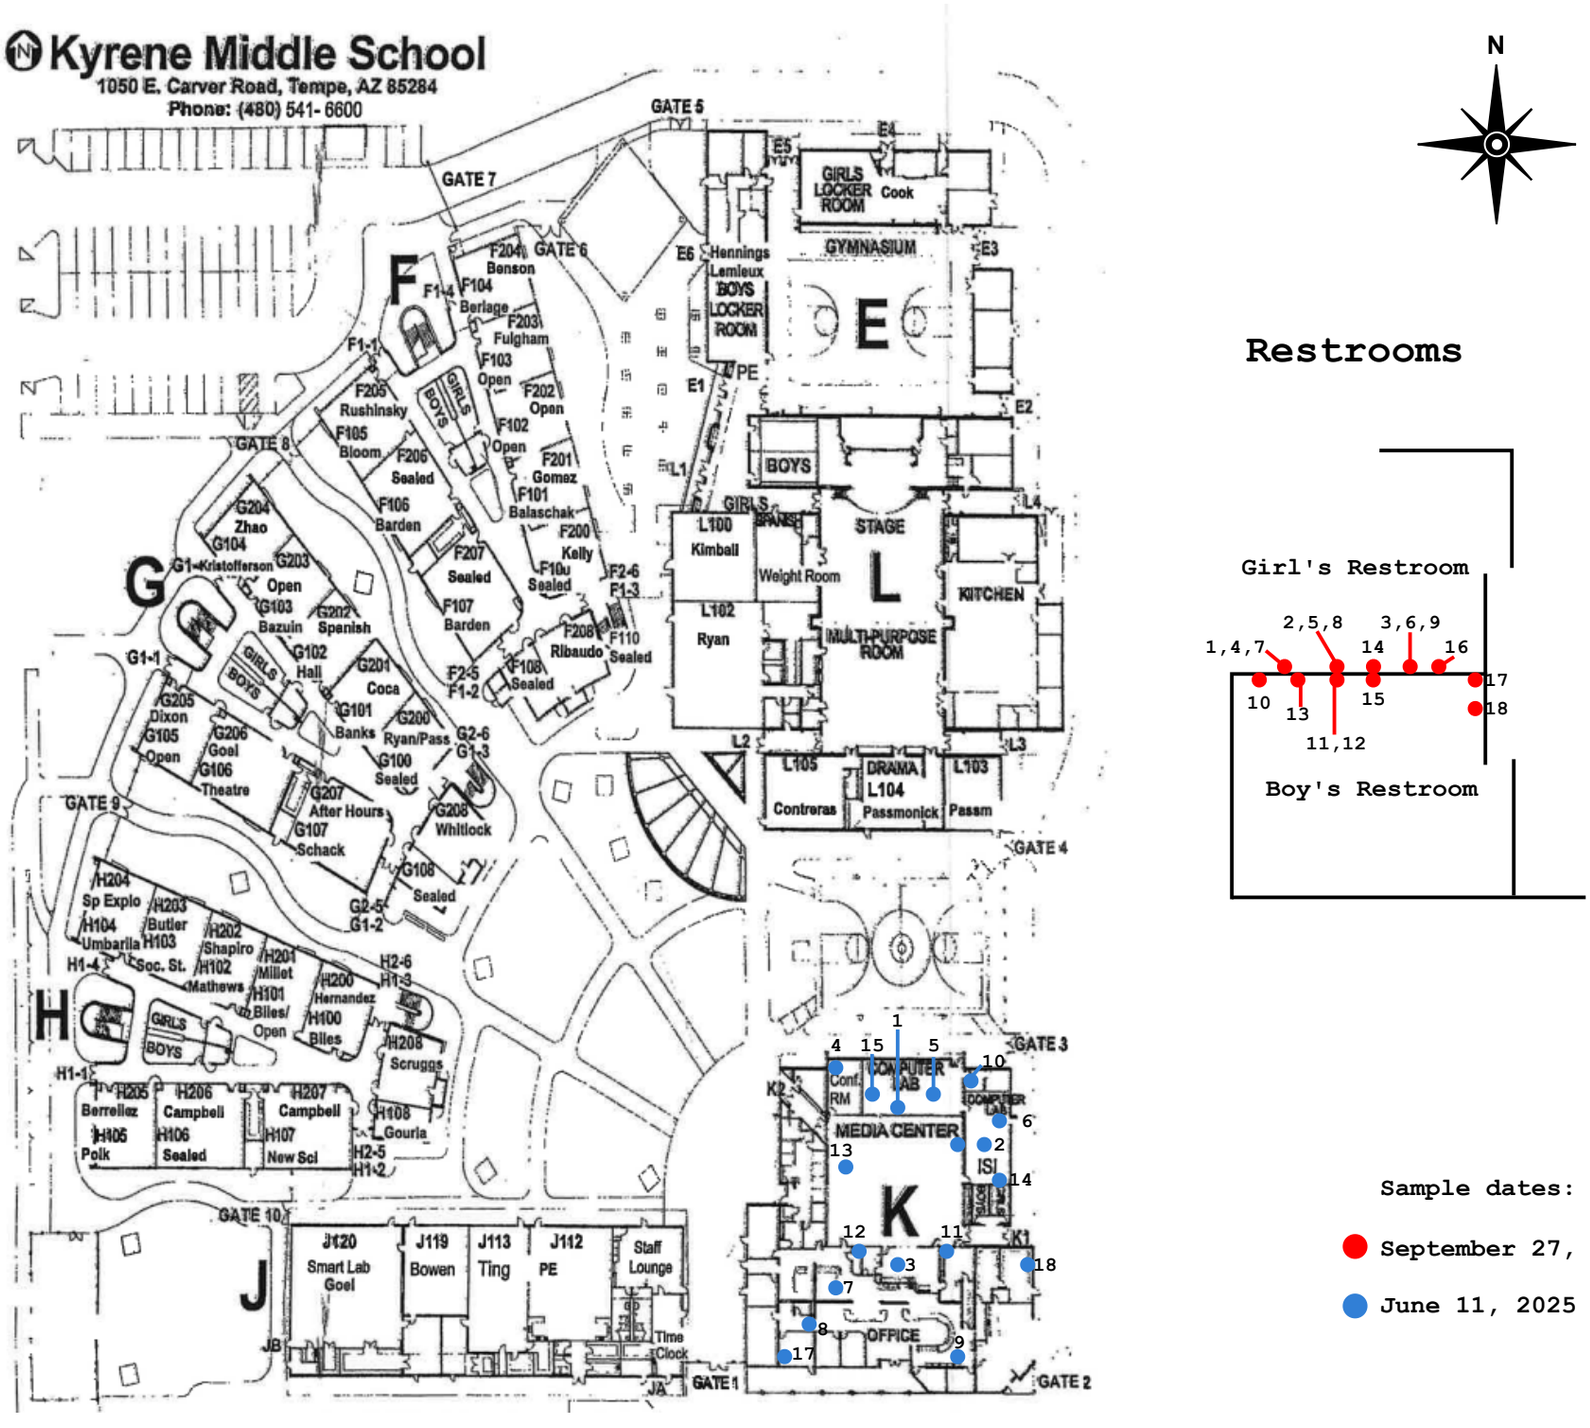

N

Restrooms

Sample dates:

- September 27, 2022
- June 11, 2025

PLM Bulk Sample Location Map
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ0959.3201/AZ1418.57

Building K

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

SECTION 8

♦

PHYSICAL ASSESSMENT INFORMATION SHEETS

BUILDING MATERIAL PHYSICAL ASSESSMENT INFORMATION SHEET

Project #: AZ1418.57 **Client:** Kyrene Elementary School District **Site:** Kyrene Middle School **Bldg #:** F

(HM) Material #: 48 **Quantity of Material:** 1,000 sq. ft. **Material in Air Plenum?** Yes **No**

Material Description: Insulation for White Pipe Wrap **Material Location(s):** Above Ceiling

Material Type: TSI Surfacing
Miscellaneous (Circle One)

Physical Assessment Categories

G	1) Damaged or significantly damaged TSI ACBM	G	5) ACBM with potential for damage
G	2) Damaged friable surfacing ACBM	G	6) ACBM with potential for significant damage
G	3) Significantly damaged friable surfacing ACBM	■	7) Any remaining friable ACBM or friable suspect ACBM
G	4) Damaged or significantly damaged friable misc. ACBM		

Material Condition

Damage Type: G Physical G Water G Air Erosion G Other
G Vandalism G Vibration ■ None

Damage Extent: ■ Low <1% evenly; 10% locally G Moderate <10% evenly; 10% - 25% locally G High >10% evenly; >25% locally

Description of Damage: None, Assumed ACBM

Exposure Factors

Accessibility:	■	Low	**Occupancy:**	■	Low	**Potential for Contact:**	■	Low	**Potential for Vibration:**	■	Low	**Potential for Air Erosion:**	■	Low
	G	Moderate		G	Moderate		G	Moderate		G	Moderate		G	Moderate
	G	High		G	High		G	High		G	High		G	High

Preventative Measures: Low Potential for Disturbance

Hazard Classification/Assessment Categories

■	1) Good condition with low potential for disturbance damage	G	5) Damaged condition with potential for disturbance damage
G	2) Good condition with potential for disturbance damage	G	6) Damaged condition with potential for significant disturbance damage
G	3) Good condition with potential for significant disturbance damage	G	7) Significant damage with potential for any disturbance
G	4) Damaged condition with low potential for disturbance damage		

Inspector: Nick Marcos
Certificate #: ON-188748-8873-031325 **State:** Arizona
Signature: Nick Marcos **Exp Date:** March 13, 2026

Management Planner: Tracey Carpenter
Certificate #: ON-4651-14588-070625 **State:** Arizona
Signature: Tracey Carpenter **Exp Date:** July 6, 2026

SECTION 9

♦

LABORATORY REPORTS

EMLab P&K
A TestAmerica Company

Report for:

Mrs. Krista Wahnefried
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Project: 1418.04; Kyrene Middle
EML ID: 1740200

Approved by:

Approved Signatory
Renee Luna

Dates of Analysis:
Asbestos PLM: 06-10-2017

Service SOPs: Asbestos PLM (EPA Methods 600/R-93/116 & 600/M4-82-020, SOP EM-AS-S-1267)

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the items tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

EMLab P&K ("the Company") shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

EMLab P&K
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 Fax (623) 780-7695 www.emlab.com

Client: Dominion Environmental Consultants, Inc.
C/O: Mrs. Krista Wahnefried
Re: 1418.04; Kyrene Middle

Date of Sampling: 06-08-2017
Date of Receipt: 06-08-2017
Date of Report: 06-12-2017

ASBESTOS PLM REPORT: EPA-600/M4-82-020 & EPA METHOD 600/R-93-116

Total Samples Submitted:	12
Total Samples Analyzed:	12
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM1, Blue Cove Base & Mastic

Lab ID-Version‡: 8122490-1

Sample Layers	Asbestos Content
Blue Baseboard	ND
White Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM2, Blue Cove Base & Mastic

Lab ID-Version‡: 8122491-1

Sample Layers	Asbestos Content
Blue Baseboard	ND
White Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM3, Blue Cove Base & Mastic

Lab ID-Version‡: 8122492-1

Sample Layers	Asbestos Content
Blue Baseboard	ND
White Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM4, Orange Pell Drywall (Paint,Texture,Tape,Joint Compound,& Drywall)

Lab ID-Version‡: 8122493-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. EMLab P&K reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

EMLab P&K
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 Fax (623) 780-7695 www.emlab.com

Client: Dominion Environmental Consultants, Inc.
C/O: Mrs. Krista Wahnefried
Re: 1418.04; Kyrene Middle

Date of Sampling: 06-08-2017
Date of Receipt: 06-08-2017
Date of Report: 06-12-2017

ASBESTOS PLM REPORT: EPA-600/M4-82-020 & EPA METHOD 600/R-93-116

Location: PLM5, Orange Pell Drywall (Paint,Texture,Tape,Joint Compound,& Drywall)

Lab ID-Version‡: 8122494-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM6, Orange Pell Drywall (Paint,Texture,Tape,Joint Compound,& Drywall)

Lab ID-Version‡: 8122495-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM7, FRP & Mastic

Lab ID-Version‡: 8122496-1

Sample Layers	Asbestos Content
White Fiberglass Reinforced Plastic	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	25% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM8, FRP & Mastic

Lab ID-Version‡: 8122497-1

Sample Layers	Asbestos Content
White Fiberglass Reinforced Plastic	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	25% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. EMLab P&K reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

EMLab P&K
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 Fax (623) 780-7695 www.emlab.com

Client: Dominion Environmental Consultants, Inc.
C/O: Mrs. Krista Wahnefried
Re: 1418.04; Kyrene Middle

Date of Sampling: 06-08-2017
Date of Receipt: 06-08-2017
Date of Report: 06-12-2017

ASBESTOS PLM REPORT: EPA-600/M4-82-020 & EPA METHOD 600/R-93-116

Location: PLM9, FRP & Mastic Lab ID-Version‡: 8122498-1

Sample Layers	Asbestos Content
White Fiberglass Reinforced Plastic	ND
Yellow Mastic	ND
Composite Non-Asbestos Content:	25% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM10, White 4"x4" Cermaic Wall Tile,Grout, & Mastic Lab ID-Version‡: 8122499-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Off-White Grout	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM11, White 4"x4" Cermaic Wall Tile,Grout, & Mastic Lab ID-Version‡: 8122500-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Off-White Grout	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM12, White 4"x4" Cermaic Wall Tile,Grout, & Mastic Lab ID-Version‡: 8122501-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Off-White Grout	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. EMLab P&K reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

EMLab P&K
1501 West Knudsen Drive
Phoenix, AZ 85027
www.EMLabPK.com
Phone: 800-651-4802

001740200

Chain of Custody

Page: 1 of 1

Client Name: Dominion Environmental Consultants
Client Address: 20045 North 19th Avenue, Building 7, Phoenix, Arizona 85027
Send Report to: Kristie Wahlquist

Phone Number: (623) 516-1415
Fax Number: (623) 516-0017
Project Number: 1418.04
Project Name: Kyrene Middle
P.O. Number: 205960

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

Total # Samples Submitted: 12 **Asbestos Analysis:** **PCM** Airborne Fiber Count (NIOSH 7400) ☐ **PLM** (EPA method 600/R-93-116) ☒

Turn Around Time Codes - (TAT) Standard - 2 Day (Default) ☒ Next Business Day ☐ Same Business Day Rush ☐ Weekend/Holiday ☐

Sample Number:	Sample Location/Description:	Sample Date:	Start/Stop Time:	Sample Volume (L)
PLM 1	Blue Cove Base + Mastic	6/8/17		
2	↓	↓		
3	↓			
4	Orange Peel Drywall (Paint, Texture, Tape, Joint Compound, Drywall)			
5	↓			
6	↓			
7	FRP + mastic			
8	↓			
9	↓			
10	White 4"x4" Ceramic wall tile, grout, + mastic			
11	↓			
12	↓	↓		

Custody Information:

Samples Relinquished: Kristie Wahlquist 6/8/17 13:20
Signature/Date/Time

Samples Received:
Signature/Date/Time

Samples Relinquished:
Signature/Date/Time

Samples Received:
Signature/Date/Time

eurofins | Built Environment Testing

Report for:

Tracey Carpenter
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.11; Kyrene Middle School - Bldg E
EML ID: 3573087

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 03-18-2024

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Kyrene Middle School - Bldg E

Date of Sampling: 03-13-2024
Date of Receipt: 03-14-2024
Date of Report: 03-18-2024

ASBESTOS PLM REPORT

Total Samples Submitted:	12
Total Samples Analyzed:	12
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, 2''x2'' White RR Floor Tiles & Grout & Thinset Lab ID-Version‡: 17464684-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Off-White Grout	ND
Gray Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM-2, 2''x2'' White RR Floor Tiles & Grout & Thinset Lab ID-Version‡: 17464685-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Off-White Grout	ND
Gray Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM-3, 2''x2'' White RR Floor Tiles & Grout & Thinset Lab ID-Version‡: 17464686-1

Sample Layers	Asbestos Content
White Ceramic Tile	ND
Off-White Grout	ND
Gray Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM-4, L-Shape Black Cove Base & Mastic Lab ID-Version‡: 17464687-1

Sample Layers	Asbestos Content
Black Cove Base	ND
Beige Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Kyrene Middle School - Bldg E

Date of Sampling: 03-13-2024
Date of Receipt: 03-14-2024
Date of Report: 03-18-2024

ASBESTOS PLM REPORT

Location: PLM-5, L-Shape Black Cove Base & Mastic Lab ID-Version‡: 17464688-1

Sample Layers	Asbestos Content
Black Cove Base	ND
Beige Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-6, L-Shape Black Cove Base & Mastic Lab ID-Version‡: 17464689-1

Sample Layers	Asbestos Content
Black Cove Base	ND
Beige Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Dark Teal Bench/Tiles & Grout & Thinset Lab ID-Version‡: 17464690-1

Sample Layers	Asbestos Content
Green Ceramic Tile	ND
Blue-Green Grout	ND
Gray Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM-8, Dark Teal Bench/Tiles & Grout & Thinset Lab ID-Version‡: 17464691-1

Sample Layers	Asbestos Content
Green Ceramic Tile	ND
Blue-Green Grout	ND
Gray Thinset	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Kyrene Middle School - Bldg E

Date of Sampling: 03-13-2024
Date of Receipt: 03-14-2024
Date of Report: 03-18-2024

ASBESTOS PLM REPORT

Location: PLM-9, Dark Teal Bench/Tiles & Grout & Thinset Lab ID-Version‡: 17464692-1

Sample Layers	Asbestos Content
Green Ceramic Tile	ND
Blue-Green Grout	ND
Gray Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM-10, Light Teal Bench Tiles & Grout & Thinset Lab ID-Version‡: 17464693-1

Sample Layers	Asbestos Content
Green Ceramic Tile	ND
Blue-Green Grout	ND
Gray Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM-11, Light Teal Bench Tiles & Grout & Thinset Lab ID-Version‡: 17464694-1

Sample Layers	Asbestos Content
Green Ceramic Tile	ND
Blue-Green Grout	ND
Gray Thinset	ND
Sample Composite Homogeneity:	Poor

Location: PLM-12, Light Teal Bench Tiles & Grout & Thinset Lab ID-Version‡: 17464695-1

Sample Layers	Asbestos Content
Green Ceramic Tile	ND
Blue-Green Grout	ND
Gray Thinset	ND
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins | EMLab P&K

www.EMLabPK.com

Marlton, NJ: 3000 Lincoln Dr E, Ste. A, Marlton, NJ 08053 (866) 871-1984
Phoenix, AZ: 1501 West Knudsen Drive, Phoenix, AZ 85027 * (800) 651-4802
SSF, CA: 6000 Shoreline Ct, Ste. 205, S. San Francisco, CA 94080 * (866) 888-6653

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

REQ

003573087

CONTACT INFORMATION			
Company:	Dominion Environmental Consultants	Address: 20045 N. 19th Ave, Bldg 7, Phoenix, AZ 85027	
Contact:	Tracey Carpenter	Special Instructions: email results: tcarpenter@dominion-env.com	
Phone:	(602) 989-9992		

PROJECT INFORMATION				TURN AROUND TIME CODES - (TAT)	
Project ID:	AZ 1418.11			STD - Standard (Default)	Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.
Project Description:	Kyrene Middle School - Bldg E			ND - Next Business Day	
Project Zip Code:	85284	Sampling Date/Time:	3/13/24 @4pm	SD - Same Business Day	
PO Number:	316031	Sampled By:	TLC	WH - Weekend/Holiday/ASAP	

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	2"x2" White RR Floor Tiles + Grout + Thinset	B / 1	STD / 1		
PLM 4-6	L-Shape Black Cove Base + Mastic	B / 1	STD / 1		
PLM 7-9	Dark Teal ~~Wall~~ Bench Tiles + Grout + Thinset	B / 1	STD / 1		
PLM 10-12	Light Teal Bench Tiles + Grout + Thinset	B / 1	STD / 1		

Non-Culturable

Spore Trap		Tape, Swab, Bulk			BioCas Swab,													
Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quantitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + *Asp.* spp.)	Culturable Air Fungi (Genus ID + *Asp.* spp.)	Gram Stain and Counts (Culturable Air and Surface Bacteria)	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)		Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb)	PCR (please specify test)	Allergens (please specify test)	
														X				
														X				
													X					
													X					

SAMPLE TYPE CODES			
BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Tracey Carp	3/14/24 @ 8:30 AM		3-14-24

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.57; Kyrene Middle School - Bldg. E/L
EML ID: 4112400

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 06-18-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. E/L

Date of Sampling: 06-16-2025
Date of Receipt: 06-16-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	18
Total Samples Analyzed:	18
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20525339-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Transparent Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-2, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20525340-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Transparent Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-3, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20525341-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Transparent Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. E/L

Date of Sampling: 06-16-2025
Date of Receipt: 06-16-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM-4, Black Carpet Square and Mastic

Lab ID-Version‡: 20525342-1

Sample Layers	Asbestos Content
Black Carpet	ND
Transparent Mastic	ND
Composite Non-Asbestos Content:	65% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. E/L

Date of Sampling: 06-16-2025
Date of Receipt: 06-16-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM-5, Black Carpet Square and Mastic Lab ID-Version‡: 20525343-1

Sample Layers	Asbestos Content
Black Carpet	ND
Transparent Mastic	ND
Composite Non-Asbestos Content:	65% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-6, Black Carpet Square and Mastic Lab ID-Version‡: 20525344-1

Sample Layers	Asbestos Content
Black Carpet	ND
Transparent Mastic	ND
Composite Non-Asbestos Content:	65% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-7, Blue Cove Base and Mastic Lab ID-Version‡: 20525345-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-8, Blue Cove Base and Mastic Lab ID-Version‡: 20525346-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. E/L

Date of Sampling: 06-16-2025
Date of Receipt: 06-16-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM-9, Blue Cove Base and Mastic Lab ID-Version‡: 20525347-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-10, 2' X 2' Ceiling Tile Lab ID-Version‡: 20525348-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-11, 2' X 2' Ceiling Tile Lab ID-Version‡: 20525349-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-12, 2' X 2' Ceiling Tile Lab ID-Version‡: 20525350-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. E/L

Date of Sampling: 06-16-2025
Date of Receipt: 06-16-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM-13, 2' X 4' Ceiling Tile Lab ID-Version‡: 20525351-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-14, 2' X 4' Ceiling Tile Lab ID-Version‡: 20525352-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-15, 2' X 4' Ceiling Tile Lab ID-Version‡: 20525353-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-16, Orange Peel D.W. (paint,tex,tape,j.c,d.w.) Lab ID-Version‡: 20525354-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. E/L

Date of Sampling: 06-16-2025
Date of Receipt: 06-16-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM-17, Orange Peel D.W. (paint,tex,tape,j.c,d.w.) Lab ID-Version‡: 20525355-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-18, Orange Peel D.W. (paint,tex,tape,j.c,d.w.) Lab ID-Version‡: 20525356-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. E/L

Date of Sampling: 06-16-2025
Date of Receipt: 06-16-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst

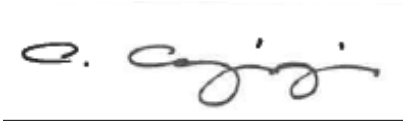

Analyst: Aaron Agajanian

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.57		
Project Description:	Kyrene Middle School - Bldg. E/L		
Project Zip Code:		Sampling Date/Time:	6/16/2025
PO Number:	13746	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	Gray Multi-Color Carpet Square and Mastic	B	STD		
PLM 4-6	Black Carpet Square and Mastic	B	STD		
PLM 7-9	Blue Cove Base and Mastic	B	STD		
PLM 10-12	2' X 2' Ceiling Tile	B	STD		
PLM 13-15	2' X 4' Ceiling Tile	B	STD		
PLM 16-18	Orange Peel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD		

REQUESTED SERVICES

Non-Culturable

Spore Trap Analysis
Other biological particles - supplement
Direct Microscopic Exam (Qualitative)
Quatitative spore count direct exam
Dust Characterization

Culturable

1-Media Surface Fungi (Genus ID + *Asp.* spp.)
Culturable Air Fungi (Genus ID + *Asp.* spp.)
Gram Stain and Counts (Culturable Air and Surf
Legionella culture
Total Coliform, *E coli* (Presence/Absence)
QuantiTray-Sewage Screen
OTHER: (please specify test)

Other Requests

	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3		X			
PLM 4-6		X			
PLM 7-9		X			
PLM 10-12		X			
PLM 13-15		X			
PLM 16-18		X			

004112400

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME
Nick Marcos	6/16/2025

RECEIVED BY	DATE & TIME
Patty Lopp	6/16/25 4:44 pm

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

EMLab P&K
A TestAmerica Company

Report for:

Mr. Xin Lou
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Project: AZ0959.2056; Kyrene Middle School
EML ID: 2091519

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 02-07-2019

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the items tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

EMLab P&K ("the Company") shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

EMLab P&K
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 Fax (623) 780-7695 www.emlab.com

Client: Dominion Environmental Consultants, Inc.
C/O: Mr. Xin Lou
Re: AZ0959.2056; Kyrene Middle School

Date of Sampling: 02-06-2019
Date of Receipt: 02-06-2019
Date of Report: 02-07-2019

ASBESTOS PLM REPORT

Total Samples Submitted:	9
Total Samples Analyzed:	9
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, Cabinet Caulking-Paint Lab ID-Version‡: 9888074-1

Sample Layers	Asbestos Content
Green Paint	ND
White Caulk	ND
Sample Composite Homogeneity:	Good

Location: PLM-2, Cabinet Caulking-Paint Lab ID-Version‡: 9888075-1

Sample Layers	Asbestos Content
Green Paint	ND
White Caulk	ND
Sample Composite Homogeneity:	Good

Location: PLM-3, Cabinet Caulking-Paint Lab ID-Version‡: 9888076-1

Sample Layers	Asbestos Content
Green Paint	ND
White Caulk	ND
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by any agency of the federal government. EMLab P&K reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

EMLab P&K
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 Fax (623) 780-7695 www.emlab.com

Client: Dominion Environmental Consultants, Inc.
C/O: Mr. Xin Lou
Re: AZ0959.2056; Kyrene Middle School

Date of Sampling: 02-06-2019
Date of Receipt: 02-06-2019
Date of Report: 02-07-2019

ASBESTOS PLM REPORT

Location: PLM-4, Blue Cove Base, Mastic Lab ID-Version‡: 9888077-1

Sample Layers	Asbestos Content
Blue Baseboard	ND
White Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-5, Blue Cove Base, Mastic Lab ID-Version‡: 9888078-1

Sample Layers	Asbestos Content
Blue Baseboard	ND
White Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-6, Blue Cove Base, Mastic Lab ID-Version‡: 9888079-1

Sample Layers	Asbestos Content
Blue Baseboard	ND
White Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by any agency of the federal government. EMLab P&K reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

EMLab P&K
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 Fax (623) 780-7695 www.emlab.com

Client: Dominion Environmental Consultants, Inc.
C/O: Mr. Xin Lou
Re: AZ0959.2056; Kyrene Middle School

Date of Sampling: 02-06-2019
Date of Receipt: 02-06-2019
Date of Report: 02-07-2019

ASBESTOS PLM REPORT

Location: PLM-7, Orange Peel Drywall System, (Paint, Texture, Tape, Joint Compound, Drywall)

Lab ID-Version‡: 9888080-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-8, Orange Peel Drywall System, (Paint, Texture, Tape, Joint Compound, Drywall)

Lab ID-Version‡: 9888081-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM-9, Orange Peel Drywall System, (Paint, Texture, Tape, Joint Compound, Drywall)

Lab ID-Version‡: 9888082-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by any agency of the federal government. EMLab P&K reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY — EMLab P

www.EMLabPK.com

Cherry Hill, NJ: 1936 Olney Avenue, Cherry Hill, NJ 08003 * **(866) 871-1984**
Phoenix, AZ: 1501 West Knudsen Drive, Phoenix, AZ 85027 * **(800) 651-4802**
San Bruno, CA: 1150 Bayhill Drive, #100, San Bruno, CA 94066 * **(866) 888-66**

002091519

Snow	Wind	Clear

CONTACT INFORMATION

Company: Dominion Environmental Consultants Inc.
Address: 20045 N 19th Ave - Building 7, Phoenix, Arizona
Contact: Xin Lou
Special Instructions:
Phone: 602-810-8581

PROJECT INFORMATION

Project ID: AZ 0959.2056
Project Desc.: Kyrene Middle School
Project Zip Code:
Sampling Date & Time: 2/6/19
PO Number: 232690

TURNAROUND TIME (TAT)

STD - Standard (DEFAULT)
ND - Next Business Day
SD - Same Business Day Rush
WH - Weekend/Holiday

Sample ID	#	Description	Sample Type (Below)	TAT	Total Volume / Area (if applicable)	Notes / Special Requirements
PM-1	2	Cabinet Caulking, Paint	B	ND		
	3	↓	↓	↓		
	4	Blue Cove Base, Mastic				
	5	↓				
	6	↓				
	7	Orange Peel Drywall systems Paint				
	8	Texture, Tape, Joint Compound, Drywall				
↓	9	↓	↓	↓		

SAMPLE TYPE CODES

BC - BioCassette™	ST - Spore Trap: Zefon, Allergenco, Burkard...	T - Tape	D - Dust
AIS - Andersen		SW - Swab	SO - Soil
SAS - Surface Air Sampler	P - Potable Water	B - Bulk	
CP - Contact Plate	NP - Non-Potable Water	O - Other:	

RELINQUISHED BY	DATE & TIME
Xin Lou	2/6/19

RECEIVED BY	DATE & TIME
K Griffith 330	2/7/19

LABORATORY ANALYSIS REQUESTED (Check)

Non-Culturable		Culturable												Other Requests
Spore Trap	Tape Swab Bulk	BioCassette™ Andersen, SAS, Swab, Water, Bulk, Dust, Soil, Contact												
Fungi - Spore Trap Analysis	Spore Trap Analysis - Other particles	Direct Microscopic Exam (Qualitative)	Quantitative Spore Count Direct Exam	1-Media Surface Fungi (Genus ID + Asp. spp.)	2-Media Surface Fungi (Genus ID + Asp. spp.)	3-Media Surface Fungi (Genus ID + Asp. spp.)	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and Surface Bacteri	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	Membrane Filtration (Please specify organism)	MPN Bacteria (Please specify organism)	Quant Tray - Sewage Screen	Asbestos Analysis - PCM Airborne Fiber Count (NIOSH 74	Asbestos Analysis - PLM (EPA method 600/R-93-116)	PCR (please specify test)
															X	
															X	
															X	
															X	
															X	
															X	
															X	
															X	
															X	

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at www.emlabpk.com/terms.html
Copyright © 2002-2009 EMLab P&K

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.57; Kyrene Middle School - Bldg. F
EML ID: 4112393

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 06-18-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. F

Date of Sampling: 06-16-2025
Date of Receipt: 06-16-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	18
Total Samples Analyzed:	18
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20525420-1

Sample Layers	Asbestos Content
Gray Carpet	ND
Semi-Transparent Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-2, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20525421-1

Sample Layers	Asbestos Content
Gray Carpet	ND
Semi-Transparent Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-3, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20525422-1

Sample Layers	Asbestos Content
Gray Carpet	ND
Semi-Transparent Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-4, Black Carpet Square and Mastic Lab ID-Version‡: 20525423-1

Sample Layers	Asbestos Content
Black Carpet	ND
Black Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. F

Date of Sampling: 06-16-2025
Date of Receipt: 06-16-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM-5, Black Carpet Square and Mastic Lab ID-Version‡: 20525424-1

Sample Layers	Asbestos Content
Black Carpet	ND
Black Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-6, Black Carpet Square and Mastic Lab ID-Version‡: 20525425-1

Sample Layers	Asbestos Content
Black Carpet	ND
Black Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM-7, Blue Cove Base and Mastic Lab ID-Version‡: 20525426-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-8, Blue Cove Base and Mastic Lab ID-Version‡: 20525427-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. F

Date of Sampling: 06-16-2025
Date of Receipt: 06-16-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM-9, Blue Cove Base and Mastic Lab ID-Version‡: 20525428-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-10, Orange Peel D.W. (paint,tex,tape,j.c.,d.w.) Lab ID-Version‡: 20525429-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-11, Orange Peel D.W. (paint,tex,tape,j.c.,d.w.) Lab ID-Version‡: 20525430-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. F

Date of Sampling: 06-16-2025
Date of Receipt: 06-16-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM-12, Orange Peel D.W. (paint,tex,tape,j.c.,d.w.) Lab ID-Version‡: 20525431-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. F

Date of Sampling: 06-16-2025
Date of Receipt: 06-16-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM-13, 2' X 4' Ceiling Tile Lab ID-Version‡: 20525432-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-14, 2' X 4' Ceiling Tile Lab ID-Version‡: 20525433-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-15, 2' X 4' Ceiling Tile Lab ID-Version‡: 20525434-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM-16, White w/ Black 12" X 12" VCT and Mastic Lab ID-Version‡: 20525435-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. F

Date of Sampling: 06-16-2025
Date of Receipt: 06-16-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM-17, White w/ Black 12" X 12" VCT and Mastic Lab ID-Version‡: 20525436-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-18, White w/ Black 12" X 12" VCT and Mastic Lab ID-Version‡: 20525437-1

Sample Layers	Asbestos Content
White Floor Tile	ND
Yellow Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. F

Date of Sampling: 06-16-2025
Date of Receipt: 06-16-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Renee Luna-Trepczynski

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.57		
Project Description:	Kyrene Middle School - Bldg. F		
Project Zip Code:		Sampling Date/Time:	6/16/2025
PO Number:	13745	Sampled By	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

REQUESTED SERVICES

Non
Spor
Trap

004112393

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	Gray Multi-Color Carpet Square and Mastic	B	STD		
PLM 4-6	Black Carpet Square and Mastic	B	STD		
PLM 7-9	Blue Cove Base and Mastic	B	STD		
PLM 10-12	Orange Peel D.W. (paint,tex,tape,j.c.,d.w.)	B	STD		
PLM 13-15	2' X 4' Ceiling Tile	B	STD		
PLM 16-18	White w/ Black 12" X 12" VCT and Mastic	B	STD		

Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quantitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp. spp.)	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and Surface	Legionella culture	Total Coliform, E.coli (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)

Other Requests

Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
	X			
	X			
	X			
	X			
	X			
	X			

SAMPLE TYPE CODES

BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME
Nick Marcos	6/16/2025

RECEIVED BY	DATE & TIME
Patty Vega	6/16/25 4:44 pm

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.57; Kyrene Middle School - Bldg. G
EML ID: 4110232

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 06-17-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. G

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-17-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM 1, 2' x 4' Ceiling Tile Lab ID-Version‡: 20512256-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 2, 2' x 4' Ceiling Tile Lab ID-Version‡: 20512257-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 3, 2' x 4' Ceiling Tile Lab ID-Version‡: 20512258-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. G

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-17-2025

ASBESTOS PLM REPORT

Location: PLM 4, Orange Peel D.W. (Paint, Tex, Tape, J.C., D.W.) Lab ID-Version‡: 20512259-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. G

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-17-2025

ASBESTOS PLM REPORT

Location: PLM 5, Orange Peel D.W. (Paint, Tex, Tape, J.C., D.W.) Lab ID-Version‡: 20512260-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM 6, Orange Peel D.W. (Paint, Tex, Tape, J.C., D.W.) Lab ID-Version‡: 20512261-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM 7, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20512262-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Transparent Mastic	ND
Gray Leveling Compound	ND
Orange Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. G

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-17-2025

ASBESTOS PLM REPORT

Location: PLM 8, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20512263-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Transparent Mastic	ND
Gray Leveling Compound	ND
Orange Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. G

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-17-2025

ASBESTOS PLM REPORT

Location: PLM 9, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20512264-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Transparent Mastic	ND
Gray Leveling Compound	ND
Orange Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM 10, Blue Cove Base and Mastic

Lab ID-Version‡: 20512265-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 11, Blue Cove Base and Mastic

Lab ID-Version‡: 20512266-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 12, Blue Cove Base and Mastic

Lab ID-Version‡: 20512267-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. G

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-17-2025

ASBESTOS PLM REPORT

Location: PLM 13, Black Carpet Square and Mastic

Lab ID-Version‡: 20512268-1

Sample Layers	Asbestos Content
Black Carpet	ND
Transparent Mastic	ND
Gray Leveling Compound	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM 14, Black Carpet Square and Mastic

Lab ID-Version‡: 20512269-1

Sample Layers	Asbestos Content
Black Carpet	ND
Transparent Mastic	ND
Gray Leveling Compound	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM 15, Black Carpet Square and Mastic

Lab ID-Version‡: 20512270-1

Sample Layers	Asbestos Content
Black Carpet	ND
Transparent Mastic	ND
Gray Leveling Compound	ND
Orange Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. G

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-17-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst

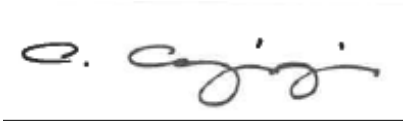

Analyst: Aaron Agajanian

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL: None					
Light					
Moderate					
Heavy					

004110232

CONTACT INFORMATION		
Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION			
Project ID:	AZ1418.57		
Project Description:	Kyrene Middle School - Bldg. G		
Project Zip Code:		Sampling Date/Time:	6/12/2025
PO Number:	13744	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)	
STD - Standard (Default)	Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.
ND - Next Business Day	
SD - Same Business Day	
WH - Weekend/Holiday/ASAP	

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	2' X 4' Ceiling Tile	B	STD		
PLM 4-6	Orange Peel D.W. (Paint,tex,tape,j.c.,d.w.)	B	STD		
PLM 7-9	Gray Multi-Color Carpet Square and Mastic	B	STD		
PLM 10-12	Blue Cove Base and Mastic	B	STD		
PLM 13-15	Black Carpet Square and Mastic	B	STD		

Non-Cultural: Spore Trap; Tape Swab; Requests

SAMPLE ID	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Qualitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + *Asp.* spp.)	Culturable Air Fungi (Genus ID + *Asp.* spp.)	Gram Stain and Counts (Culturable Air and Surface Bacteria)	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (ERA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
PLM 1-3														X			
PLM 4-6														X			
PLM 7-9														X			
PLM 10-12														X			
PLM 13-15														X			

SAMPLE TYPE CODES			
BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Nick Marcos	6/13/2025	[illegible]	6/13/25 11:54 am

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

Aerobiology Laboratory Associates, Incorporated
Expertise Since 1997

Lab Use:
20049419
11/19/2020

ELITE Proficient — AZ, CA, CO, FL, GA, VA, NJ
NVLAP — AZ, CA, CO, VA
AZ, CA, CO, FL GA, NJ, VA

Page _____ of _____

Aerobiology Client	c395 Dominion Environmental Consultants, Inc.		
Field Contact	Nick Marcos	**Collected By/Date:** NM 11/19/20	**Relinquished By/Date:** NM 11/19/20
Reporting Address	20045 N. 19th Ave Building 7 Phoenix AZ 85027	Relinquished By/Date:	Received By/Date: 11-19-20 1050
Billing Address	20045 N. 19th Ave Building 7 Phoenix AZ 85027	Sampler Type: Andersen___ SAS___	SampleAire___ AeroTrap___ Other___ BioCulture___
Phone/Fax	623-516-1414	**PO#/Job#:** JH: AZ09S9.2635 PO: 2616336	
Reporting Email (s)	nmarcos@dominion-env.com	**Project Name:** Kyrene Middle School	
Routine ☐	24 Hour ☒ Same Day ☐ 4 Hour ☐ 2 Hour ☐	**Notes:**	
SAMPLING LOCATION ZIP CODE		**Lab Contacts:** Simone Singh (408) 498-7901 Mandy Palm (858) 444-7138	

	Sample No.	Test Code	Sample Location	Total Volume/Area
1	PLM 1	3002	Orange Peel drywall sys (paint, tex, tape, J.C. drywall)	
2	2		↓	
3	3			
4	4		2'x4' Ceiling tile	
5	5		↓	
6	6			
7	7		Counter Caulking	
8	8		↓	
9	9			
10	10		Blue Cove Base & Mastic	
11	11			
12	12			
13				
14				
15				

1054	Direct, Non-viable Spore Trap	1015	Culture - WATER Legionella
1049	Direct, Quantitative- **Swab/Tape**	1017	Culture - SWAB Legionella
1050	Direct, Qualitative- **Bulk**	1010	WATER - Potable - E. coli/total coliforms
1005	AIR Culture - Bacterial Count w/ ID's	1012	SWAB - E. coli/total coliforms
1030	AIR Culture - Fungal Count w/ ID's	1028	SWAB - Sewage Screen (E. coli/Entero/fecal coliforms)
1006	SWAB Culture - Bacterial Count w/ ID's	2056	WATER - Heterotrophic Plate Count
1031	SWAB Culture - Fungal Count w/ ID's	3001	ASBESTOS - Point count
1008	BULK Culture - Bacterial Count w/ ID's	3002	ASBESTOS - PLM Analysis
1033	BULK Culture - Fungal Count w/ ID's	3003	ASBESTOS - Particle characterization
1007	WATER Culture - Bacterial Count w/ID's	3004	ASBESTOS - PCM Analysis

Washington, D.C. (877) 648-9150 | Atlanta, GA (770) 947-2828 | Denver, CO (303) 232-3746 | Phoenix, AZ (602) 441-3700 | Cherry Hill, NJ (856) 486-1177 | Los Angeles, CA (714) 895-8401 | Ft. Lauderdale, FL (954) 451-3725

ALL SAMPLES ACCEPTABLE
INIT/DATE KO 11.19.20

NVLAP®
TESTING NVLAP LAB CODE 500097-0

Aerobiology Laboratory Associates, Incorporated
A Pace Analytical® Laboratory

Aerobiology Laboratory Associates, Inc.
2228 W Northern Ave. Suite B-110
Phoenix, AZ 85021
(602) 441-3700
www.aerobiology.net

Certificate of Analysis

Client:
Dominion Environmental Consultants, Inc
20045 N. 19th Ave Building 7
Phoenix, AZ 85027
Attn: Ryan Kuhn

Project Name: **261636/AZ0959.2635 Kyrene Middle School (NM)**
Project ID: 20049419

Date Collected:	11/19/2020
Date Received:	11/19/2020
Date Analyzed:	11/20/2020
Date Reported:	11/20/2020

Test Requested: **Asbestos Bulk Analysis, Polarized Light Microscopy (PLM)**: EPA 600/R-93/116 Method for Asbestos in Bulk Building Materials, EPA-40 CFR Appendix E to Subpart E of Part 763, Interim Method for Asbestos in Bulk Insulation Samples

Total Samples Submitted:	12
Total Samples Analyzed:	12
Total Samples with Asbestos (≥1%):	0

Location: PLM-1 Orange Peel Drywall Sys (Paint, Tex, Tape, JC, Drywall) Lab ID: 20049419-001

Physical Description of Sample/Layer	Asbestos Detected
White Paint	ND
White Texture	ND
White Joint Compound	ND
Cream Tape	ND
White/Tan Drywall	ND

Location: PLM-2 Orange Peel Drywall Sys (Paint, Tex, Tape, JC, Drywall) Lab ID: 20049419-002

Physical Description of Sample/Layer	Asbestos Detected
White Paint	ND
White Texture	ND
White Joint Compound	ND
Cream Tape	ND
White/Tan Drywall	ND

Location: PLM-3 Orange Peel Drywall Sys (Paint, Tex, Tape, JC, Drywall) Lab ID: 20049419-003


Physical Description of Sample/Layer	Asbestos Detected
White Paint	ND
White Texture	ND
White Joint Compound	ND
Cream Tape	ND
White/Tan Drywall	ND

Location: PLM-4 2'x 4' Ceiling Tile Lab ID: 20049419-004


Physical Description of Sample/Layer	Asbestos Detected
White/Tan Ceiling Tile	ND

Location: PLM-5 2'x 4' Ceiling Tile Lab ID: 20049419-005

Physical Description of Sample/Layer	Asbestos Detected
White/Tan Ceiling Tile	ND

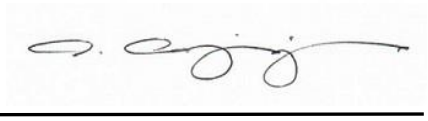

Aaron Agajanian
Analyst



Elle Teague
Manager-Asbestos

A Amosite
AC Actinolite
AN Anthophyllite
CHRY Chrysotile
CR Crocidolite
TR Tremolite
Trace Less Than 1%
ND None Detected

Non-Asbestos fiber percentage and matrix information available upon request

NVLAP
TESTING NVLAP LAB CODE 500097-0

Aerobiology Laboratory Associates, Incorporated
A Pace Analytical® Laboratory

Aerobiology Laboratory Associates, Inc.
2228 W Northern Ave. Suite B-110
Phoenix, AZ 85021
(602) 441-3700
www.aerobiology.net

Client:
Dominion Environmental Consultants, Inc
20045 N. 19th Ave Building 7
Phoenix, AZ 85027
Attn: Ryan Kuhn

Certificate of Analysis

Project Name: 261636/AZ0959.2635 Kyrene Middle School (NM)

Project ID: 20049419

Date Collected: 11/19/2020
Date Received: 11/19/2020
Date Analyzed: 11/20/2020
Date Reported: 11/20/2020

Test Requested: **Asbestos Bulk Analysis, Polarized Light Microscopy (PLM)**: EPA 600/R-93/116 Method for Asbestos in Bulk Building Materials, EPA-40 CFR Appendix E to Subpart E of Part 763, Interim Method for Asbestos in Bulk Insulation Samples

Location: PLM-6 2'x 4' Ceiling Tile Lab ID: 20049419-006

Physical Description of Sample/Layer	Asbestos Detected
White/Tan Ceiling Tile	ND

Location: PLM-7 Counter Caulking Lab ID: 20049419-007

Physical Description of Sample/Layer	Asbestos Detected
White Caulk	ND

Location: PLM-8 Counter Caulking Lab ID: 20049419-008

Physical Description of Sample/Layer	Asbestos Detected
White Caulk	ND

Location: PLM-9 Counter Caulking Lab ID: 20049419-009

Physical Description of Sample/Layer	Asbestos Detected
White Caulk	ND

Location: PLM-10 Blue Cove Base & Mastic Lab ID: 20049419-010

Physical Description of Sample/Layer	Asbestos Detected
Tan Mastic	ND
Blue Cove Base	ND

Location: PLM-11 Blue Cove Base & Mastic Lab ID: 20049419-011

Physical Description of Sample/Layer	Asbestos Detected
Tan Mastic	ND
Blue Cove Base	ND

Location: PLM-12 Blue Cove Base & Mastic Lab ID: 20049419-012

Physical Description of Sample/Layer	Asbestos Detected
Tan Mastic	ND
Blue Cove Base	ND

Aaron Agajanian
Analyst

Elle Teague
Manager-Asbestos

A Amosite
AC Actinolite
AN Anthophyllite
CHRY Chrysotile
CR Crocidolite
TR Tremolite
Trace Less Than 1%
ND None Detected

Non-Asbestos fiber percentage and matrix information available upon request

TESTING NVLAP LAB CODE 500097-0

Aerobiology Laboratory Associates, Inc.
2228 W Northern Ave. Suite B-110
Phoenix, AZ 85021
(602) 441-3700
www.aerobiology.net

Client:
Dominion Environmental Consultants, Inc
20045 N. 19th Ave Building 7
Phoenix, AZ 85027
Attn: Ryan Kuhn

Certificate of Analysis

Project Name: 261636/AZ0959.2635 Kyrene Middle School (NM)

Project ID: 20049419

Date Collected: 11/19/2020
Date Received: 11/19/2020
Date Analyzed: 11/20/2020
Date Reported: 11/20/2020

General Notes

* **ND** indicates no asbestos was detected.

* The method detection limit is 1%.

* **Trace** or "<1" indicates asbestos was identified in the sample, but the concentration is less than 1%.

* All regulated asbestos minerals (i.e. chrysotile, amosite, crocidolite, anthophyllite, tremolite, and actinolite) were sought in every layer of each sample, but only those asbestos minerals detected are listed. Amosite is the common name for the asbestiform variety of the minerals cummingtonite and grunerite. Crocidolite is the common name used for the asbestiform variety of the mineral riebeckite.

* Tile, vinyl, foam, plastic, and fine powder samples may contain asbestos fibers of such small diameter (< 0.25 microns in diameter) that these fibers cannot be detected by PLM. For such samples, more sensitive analytical methods (e.g. TEM, SEM, and XRD) are recommended if greater certainty about asbestos content is required. Semi-quantitative bulk TEM floor tile analysis is accepted under NESHAP regulations.

* These results are submitted pursuant to Aerobiology Laboratory Associates, Inc.'s current terms and conditions of sale, including the company's standard warranty and limitation of liability provisions. No responsibility or liability is assumed for the manner in which the results are used or interpreted.

* Unless notified in writing to return the samples covered by this report, Aerobiology Laboratory Associates, Inc. will store the samples for a minimum period of thirty (30) days before discarding. A shipping and handling charge will be assessed for the return of any samples.

* Aerobiology does not guarantee the results of tape lifts, microvacs, wipe, and/or debris samples. Accurate analysis cannot be performed due to particle size, media used, and/or amount of material given. Analysis of these materials should be performed by a TEM. A result of ND does not indicate that the sample area does not contain asbestos. It means the analyst could not identify asbestos in the specific sample for the reasons listed above.

Notes Required by NVLAP

* Aerobiology Laboratory shall be responsible for all the information provided in the report, except when information is provided by the customer. Aerobiology Laboratory is not responsible for the sampling activity.

* This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

* This test report relates only to the items tested or calibrated.

* This report is not valid unless it bears the name of a NVLAP-approved signatory.

* Any reproduction of this document must include the entire document in order for the report to be valid.

Non-Asbestos fiber percentage and matrix information available upon request

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.57; Kyrene Middle School - Bldg. G
EML ID: 4110232

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 06-17-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. G

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-17-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	15
Total Samples Analyzed:	15
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM 1, 2' x 4' Ceiling Tile Lab ID-Version‡: 20512256-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 2, 2' x 4' Ceiling Tile Lab ID-Version‡: 20512257-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 3, 2' x 4' Ceiling Tile Lab ID-Version‡: 20512258-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 10% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. G

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-17-2025

ASBESTOS PLM REPORT

Location: PLM 4, Orange Peel D.W. (Paint, Tex, Tape, J.C., D.W.) Lab ID-Version‡: 20512259-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. G

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-17-2025

ASBESTOS PLM REPORT

Location: PLM 5, Orange Peel D.W. (Paint, Tex, Tape, J.C., D.W.) Lab ID-Version‡: 20512260-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM 6, Orange Peel D.W. (Paint, Tex, Tape, J.C., D.W.) Lab ID-Version‡: 20512261-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM 7, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20512262-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Transparent Mastic	ND
Gray Leveling Compound	ND
Orange Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. G

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-17-2025

ASBESTOS PLM REPORT

Location: PLM 8, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20512263-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Transparent Mastic	ND
Gray Leveling Compound	ND
Orange Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. G

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-17-2025

ASBESTOS PLM REPORT

Location: PLM 9, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20512264-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Transparent Mastic	ND
Gray Leveling Compound	ND
Orange Mastic	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM 10, Blue Cove Base and Mastic

Lab ID-Version‡: 20512265-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 11, Blue Cove Base and Mastic

Lab ID-Version‡: 20512266-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 12, Blue Cove Base and Mastic

Lab ID-Version‡: 20512267-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. G

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-17-2025

ASBESTOS PLM REPORT

Location: PLM 13, Black Carpet Square and Mastic

Lab ID-Version‡: 20512268-1

Sample Layers	Asbestos Content
Black Carpet	ND
Transparent Mastic	ND
Gray Leveling Compound	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM 14, Black Carpet Square and Mastic

Lab ID-Version‡: 20512269-1

Sample Layers	Asbestos Content
Black Carpet	ND
Transparent Mastic	ND
Gray Leveling Compound	ND
Tan Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM 15, Black Carpet Square and Mastic

Lab ID-Version‡: 20512270-1

Sample Layers	Asbestos Content
Black Carpet	ND
Transparent Mastic	ND
Gray Leveling Compound	ND
Orange Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers < 1% Cellulose < 1% Glass Fibers
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. G

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-17-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst

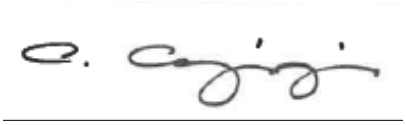

Analyst: Aaron Agajanian

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL: None					
Light					
Moderate					
Heavy					

004110232

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION

Project ID:	AZ1418.57		
Project Description:	Kyrene Middle School - Bldg. G		
Project Zip Code:		Sampling Date/Time:	6/12/2025
PO Number:	13744	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

Requests: Non-Cultural (Spore Trap; Tape Swab, ...): Spore Trap Analysis; Other biological particles - supplement; Direct Microscopic Exam (Qualitative); Qualitative spore count direct exam; Dust Characterization; 1-Media Surface Fungi (Genus ID + *Asp.* spp.); Culturable Air Fungi (Genus ID + *Asp.* spp.); Gram Stain and Counts (Culturable Air and Surface Bacteria); *Legionella* culture; Total Coliform, *E.coli* (Presence/Absence); QuantiTray-Sewage Screen; OTHER: (please specify test); Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400); Asbestos Bulk - PLM (EPA method 600/R-93-116); Lead (Pb) / Paint Chip; PCR (please specify test); Allergens (please specify test)

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)	Asbestos Bulk - PLM (EPA method 600/R-93-116)
PLM 1-3	2' X 4' Ceiling Tile	B	STD			X
PLM 4-6	Orange Peel D.W. (Paint,tex,tape,j.c.,d.w.)	B	STD			X
PLM 7-9	Gray Multi-Color Carpet Square and Mastic	B	STD			X
PLM 10-12	Blue Cove Base and Mastic	B	STD			X
PLM 13-15	Black Carpet Square and Mastic	B	STD			X

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Nick Marcos (signature)	6/13/2025	(signature)	6/13/25 11:54 am

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Tracey Carpenter
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.11; Kyrene Middle School - Bldg H
EML ID: 3573064

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 03-18-2024

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Kyrene Middle School - Bldg H

Date of Sampling: 03-14-2024
Date of Receipt: 03-14-2024
Date of Report: 03-18-2024

ASBESTOS PLM REPORT

Total Samples Submitted:	3
Total Samples Analyzed:	3
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, Orange Peel Drywall (paint, tape, texture, joint compound & drywall)

Lab ID-Version‡: 17464286-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
Pink Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-2, Orange Peel Drywall (paint, tape, texture, joint compound & drywall)

Lab ID-Version‡: 17464287-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
Composite Non-Asbestos Content:	10% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM-3, Orange Peel Drywall (paint, tape, texture, joint compound & drywall)

Lab ID-Version‡: 17464288-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
Pink Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins

www.EMLabPK.com

EMLab P&K

Marlton, NJ: 3000 Lincoln Dr E, Ste. A, Marlton, NJ 08053 * (866) 871-1984
Phoenix, AZ: 1501 West Knudsen Drive, Phoenix, AZ 85027 * (800) 651-4802
SSF, CA: 6000 Shoreline Ct, Ste. 205, S. San Francisco, CA 94080 * (866) 888-6653

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

003573064

CONTACT INFORMATION

Company:	Dominion Environmental Consultants	Address: 20045 N. 19th Ave, Bldg 7, Phoenix, AZ 85027	
Contact:	Tracey Carpenter	Special Instructions: email results: tcarpenter@dominion-env.com	
Phone:	(602) 989-9992		

PROJECT INFORMATION

Project ID:	AZ1418.11		
Project Description:	Kyrene Middle School-Bldg H		
Project Zip Code:		Sampling Date/Time:	3/14/24 @ 5:30 PM
PO Number:	316032	Sampled By:	TCC

TURN AROUND TIME CODES - (TAT)

STD - Standard (Default)
ND - Next Business Day
SD - Same Business Day
WH - Weekend/Holiday/ASAP

Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	Orange Peel Drywall (paint, tape, texture, joint compound, + drywall)	B	STD		
		1	1		

Non-Cultureable: Spore Trap; Tape, Swab, Bulk

Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quantitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + Asp. spp.)	Culturable Air Fungi (Genus ID + Asp. spp.)	Gram Stain and Counts (Culturable Air and Surface Bacteria)	Legionella culture	Total Coliform, E.coli (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb)	PCR (please specify test)	Allergens (please specify test)
													X			

SAMPLE TYPE CODES

BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME
Tracy Carp	3/14/24 @ 8:30 AM

RECEIVED BY	DATE & TIME
	3-14-24

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.57; Kyrene Middle School - Bldg. H
EML ID: 4110228

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 06-18-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. H

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	18
Total Samples Analyzed:	18
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM 1, Decorative 2' x 4' Ceiling Tile Lab ID-Version‡: 20512175-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 2, Decorative 2' x 4' Ceiling Tile Lab ID-Version‡: 20512176-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 3, Decorative 2' x 4' Ceiling Tile Lab ID-Version‡: 20512177-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 4, 2' x 4' Ceiling Tile Lab ID-Version‡: 20512178-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. H

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM 5, 2' x 4' Ceiling Tile Lab ID-Version‡: 20512179-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 6, 2' x 4' Ceiling Tile Lab ID-Version‡: 20512180-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 40% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 7, Orange Peel D.W. (Paint, Tex, Tape, J.C., D.W.) Lab ID-Version‡: 20512181-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM 8, Orange Peel D.W. (Paint, Tex, Tape, J.C., D.W.) Lab ID-Version‡: 20512182-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. H

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM 9, Orange Peel D.W. (Paint, Tex, Tape, J.C., D.W.) Lab ID-Version‡: 20512183-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM 10, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20512184-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Gray Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 11, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20512185-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Gray Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 12, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20512186-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Gray Mastic	ND
Composite Non-Asbestos Content:	70% Synthetic Fibers 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. H

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM 13, Blue Cove Base and Mastic Lab ID-Version‡: 20512187-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 14, Blue Cove Base and Mastic Lab ID-Version‡: 20512188-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 15, Blue Cove Base and Mastic Lab ID-Version‡: 20512189-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 16, Black Carpet Square and Mastic Lab ID-Version‡: 20512190-1

Sample Layers	Asbestos Content
Black Carpet	ND
Gray Mastic	ND
Composite Non-Asbestos Content:	80% Synthetic Fibers 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. H

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM 17, Black Carpet Square and Mastic Lab ID-Version‡: 20512191-1

Sample Layers	Asbestos Content
Black Carpet	ND
Gray Mastic	ND
Composite Non-Asbestos Content:	80% Synthetic Fibers 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 18, Black Carpet Square and Mastic Lab ID-Version‡: 20512192-1

Sample Layers	Asbestos Content
Black Carpet	ND
Gray Mastic	ND
Composite Non-Asbestos Content:	80% Synthetic Fibers 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. H

Date of Sampling: 06-12-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Kayla Heinen

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

004110228

CONTACT INFORMATION		
Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION			
Project ID:	AZ1418.57		
Project Description:	Kyrene Middle School - Bldg. H		
Project Zip Code:		Sampling Date/Time:	6/12/2025
PO Number:	13743	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)	
STD - Standard (Default)	Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.
ND - Next Business Day	
SD - Same Business Day	
WH - Weekend/Holiday/ASAP	

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	Decorative 2' X 4' Ceiling Tile	B	STD		
PLM 4-6	2' X 4' Ceiling Tile	B	STD		
PLM 7-9	Orange Peel D.W. (Paint,tex,tape,j.c.,d.w.)	B	STD		
PLM 10-12	Gray Multi-Color Carpet Square and Mastic	B	STD		
PLM 13-15	Blue Cove Base and Mastic	B	STD		
PLM 16-18	Black Carpet Square and Mastic	B	STD		

Non-Cultu

Spore Trap	Ti Swa	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quantitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + *Asp.* spp.)	Culturable Air Fungi (Genus ID + *Asp.* spp.)	Gram Stain and Counts (Culturable Air and Surface Bacter	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)		Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)	
																X				
																X				
																X				
																X				
																X				
																X				

er Requests

SAMPLE TYPE CODES			
BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME
Nick Marcos	6/13/2025

RECEIVED BY	DATE & TIME
Patty Lopez	6/13/25 11:53am

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

eurofins | Built Environment Testing

Report for:

Tracey Carpenter
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, Inc.
Project: AZ1418.11; Kyrene Middle School - Bldg J
EML ID: 3573059

Approved by:

Renee Luna-Trepczynski

Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 03-18-2024

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EM-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, Inc. ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, Inc.
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Tracey Carpenter
Re: AZ1418.11; Kyrene Middle School - Bldg J

Date of Sampling: 03-13-2024
Date of Receipt: 03-14-2024
Date of Report: 03-18-2024

ASBESTOS PLM REPORT

Total Samples Submitted:	3
Total Samples Analyzed:	3
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM-1, 12''x12'' White w/Gray Specks VCT & Mastic Lab ID-Version‡: 17464328-1

Sample Layers	Asbestos Content
Yellow Mastic	ND
Gray/White Floor Tile	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-2, 12''x12'' White w/Gray Specks VCT & Mastic Lab ID-Version‡: 17464329-1

Sample Layers	Asbestos Content
Yellow Mastic	ND
Gray/White Floor Tile	ND
Sample Composite Homogeneity:	Moderate

Location: PLM-3, 12''x12'' White w/Gray Specks VCT & Mastic Lab ID-Version‡: 17464330-1

Sample Layers	Asbestos Content
Yellow Mastic	ND
Gray/White Floor Tile	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY eurofins | EMLab P&K

www.EMLabPK.com

Marlton, NJ: 3000 Lincoln Dr E, Ste. A, Marlton, NJ 08053 * (866) 871-1984
Phoenix, AZ: 1501 West Knudsen Drive, Phoenix, AZ 85027 * (800) 651-4802
SSF, CA: 6000 Shoreline Ct, Ste. 205, S. San Francisco, CA 94080 * (866) 888-6653

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

RE

003573059

CONTACT INFORMATION			
Company:	Dominion Environmental Consultants	Address: 20045 N. 19th Ave, Bldg 7, Phoenix, AZ 85027	
Contact:	Tracey Carpenter	Special Instructions: email results: tcarpenter@dominion-env.com	
Phone:	(602) 989-9992		

PROJECT INFORMATION				TURN AROUND TIME CODES - (TAT)	
Project ID:	AZ1418.11			STD - Standard (Default)	Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.
Project Description:	Kyrene Middle School-Bldg J			ND - Next Business Day	
Project Zip Code:	85284	Sampling Date/Time:	3/13/24 @ 530 Pm	SD - Same Business Day	
PO Number:	316033	Sampled By:	TLC	WH - Weekend/Holiday/ASAP	

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	12" x 12" White w/	B	STD		
	Gray Specks VCT	1	1		
	+ Mastic				

Non-Culturable																												
Spore Trap		Tape, Swab, Bulk			BioC Swa																							
Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Quantitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + *Asp.* spp.)	Culturable Air Fungi (Genus ID + *Asp.* spp.)	Gram Stain and Counts (Culturable Air and Surface Bacteri	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)		Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb)	PCR (please specify test)	Allergens (please specify test)										
														X														

SAMPLE TYPE CODES			
BC - BioCassette™	CP - Contact Plate	T - Tape	O - Other:
A1S - Andersen	ST - Spore Trap	SW - Swab	
SAS - Surface Air Sampler	B - Bulk	SO - Soil	
NP - Non-potable Water	P - Potable Water	D - Dust	

RELINQUISHED BY	DATE & TIME	RECEIVED BY	DATE & TIME
Tracy Carp	3/14/24 @ 8:30		3-14-24

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.57; Kyrene Middle School - Bldg. J
EML ID: 4110217

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 06-18-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. J

Date of Sampling: 06-11-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	18
Total Samples Analyzed:	18
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM 1, Old 2' x 4' Ceiling Tile Lab ID-Version‡: 20512486-1

Sample Layers	Asbestos Content
Brown Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM 2, Old 2' x 4' Ceiling Tile Lab ID-Version‡: 20512487-1

Sample Layers	Asbestos Content
Brown Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM 3, Old 2' x 4' Ceiling Tile Lab ID-Version‡: 20512488-1

Sample Layers	Asbestos Content
Brown Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	60% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM 4, New 2' x 4' Ceiling Tile Lab ID-Version‡: 20512489-1

Sample Layers	Asbestos Content
Brown Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Good

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. J

Date of Sampling: 06-11-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM 5, New 2' x 4' Ceiling Tile Lab ID-Version‡: 20512490-1

Sample Layers	Asbestos Content
Brown Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM 6, New 2' x 4' Ceiling Tile Lab ID-Version‡: 20512491-1

Sample Layers	Asbestos Content
Brown Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	40% Cellulose 20% Glass Fibers
Sample Composite Homogeneity:	Good

Location: PLM 7, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20512492-1

Sample Layers	Asbestos Content
Gray Carpet	ND
Semi-Transparent Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 8, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20512493-1

Sample Layers	Asbestos Content
Gray Carpet	ND
Semi-Transparent Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. J

Date of Sampling: 06-11-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM 9, Gray Multi-Color Carpet Square and Mastic Lab ID-Version‡: 20512494-1

Sample Layers	Asbestos Content
Gray Carpet	ND
Semi-Transparent Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 10, Black Cove Base and Mastic Lab ID-Version‡: 20512495-1

Sample Layers	Asbestos Content
Black Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 11, Black Cove Base and Mastic Lab ID-Version‡: 20512496-1

Sample Layers	Asbestos Content
Black Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 12, Black Cove Base and Mastic Lab ID-Version‡: 20512497-1

Sample Layers	Asbestos Content
Black Cove Base	ND
Cream Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. J

Date of Sampling: 06-11-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM 13, Black Carpet Square and Mastic Lab ID-Version‡: 20512498-1

Sample Layers	Asbestos Content
Black Carpet	ND
Semi-Transparent Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 14, Black Carpet Square and Mastic Lab ID-Version‡: 20512499-1

Sample Layers	Asbestos Content
Black Carpet	ND
Semi-Transparent Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 15, Black Carpet Square and Mastic Lab ID-Version‡: 20512500-1

Sample Layers	Asbestos Content
Black Carpet	ND
Semi-Transparent Mastic	ND
Composite Non-Asbestos Content:	40% Synthetic Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 16, Orange Peel D.W. (Paint, Tex, Tape, J.C., D.W.) Lab ID-Version‡: 20512501-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. J

Date of Sampling: 06-11-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM 17, Orange Peel D.W. (Paint, Tex, Tape, J.C., D.W.) Lab ID-Version‡: 20512502-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM 18, Orange Peel D.W. (Paint, Tex, Tape, J.C., D.W.) Lab ID-Version‡: 20512503-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. J

Date of Sampling: 06-11-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst



Analyst: Renee Luna-Trepczynski

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER	Fog	Rain	Snow	Wind	Clear
LEVEL None					
Light					
Moderate					
Heavy					

Non-Cul

004110217

CONTACT INFORMATION		
Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION			
Project ID:	AZ1418.57		
Project Description:	Kyrene Middle School - Bldg. J		
Project Zip Code:		Sampling Date/Time:	6/11/2025
PO Number:	13742	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)	
STD - Standard (Default)	Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.
ND - Next Business Day	
SD - Same Business Day	
WH - Weekend/Holiday/ASAP	

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	Old 2' X 4' Ceiling Tile	B	STD		
PLM 4-6	New 2' X 4' Ceiling Tile	B	STD		
PLM 7-9	Gray Multi-Color Carpet Square and Mastic	B	STD		
PLM 10-12	Black Cove Base and Mastic	B	STD		
PLM 13-15	Black Carpet Square and Mastic	B	STD		
PLM 16-18	Orange Peel D.W. (Paint,tex,tape,j.c.,d.w.)	B	STD		

Spore Trap	Sw

Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Qualitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + *Asp.* spp.)	Culturable Air Fungi (Genus ID + *Asp.* spp.)	Gram Stain and Counts (Culturable Air and Surface Bacteria	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)	Asbestos in Air - PCM Airborne Fiber Count (NIOSH 7400)	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)
													X			
													X			
													X			
													X			
													X			
													X			

her Requests

SAMPLE TYPE CODES			
BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME
Nick Marcos	6/13/2025

RECEIVED BY	DATE & TIME
Patty Lago	6/13/25 11:53am

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

Aerobiology Laboratory Associates, Incorporated
Expertise Since 1997

Lab Use: 22039698 9/27/2022

ELITE AZ, CA, CO, FL, GA, VA, NJ | NVLAP AZ, CA, CO, VA | AZ, CA, CO, FL GA, NJ, VA

09/27/22 JV

Aerobiology Client	c395 Dominion Environmental Consultants, Inc.		
Field Contact	Nick Marcos	Collected By/Date: NM 9/27/22	Relinquished By/Date: NM 9/27/22
Reporting Address	20045 N. 19th Ave Building 7 Phoenix AZ 85027	Relinquished By/Date:	Received By/Date: 092722@1121 JV
Billing Address	20045 N. 19th Ave Building 7 Phoenix AZ 85027	Sampler Type: Andersen___ SAS___	SampleAire___ AeroTrap___ Other___ BioCulture___
Phone/Fax	623-516-1414	PO#/Job#: JH: A20959.3201	PO: 292372
Reporting Email (s)	nmarcos@dominion-env.com	Project Name:	Kyrene Middle School
Routine ☒	24 Hour ☐ Same Day ☐ 4 Hour ☐ 2 Hour ☐	Notes:	
SAMPLING LOCATION ZIP CODE		Lab Contacts:	Simone Singh (408) 498-7901 Mandy Palm (858) 444-7138

	Sample No.	Test Code	Sample Location	Total Volume/Area
1	PLM 1-3	3002	White 4"x4" Ceramic Wall tile, Mastic, Grout	
2	4-6	"	Green 4"x4" Ceramic Wall tile	
3	7-9	"	Blue 4"x4" Ceramic Wall tile	
4	10-12	"	Fixture Caulking.	
5	13-15	"	RR Greenboard D.W.	
6	16-18	"	Counter Caulking.	
7				
8				
9				
10				
11				
12				
13				
14				
15				

1054	Direct, Non-viable Spore Trap	1015	Culture - WATER Legionella
1049	Direct, Quantitative- **Swab/Tape**	1017	Culture - SWAB Legionella
1050	Direct, Qualitative- **Bulk**	1010	WATER - Potable - E. coli/total coliforms
1005	AIR Culture - Bacterial Count w/ ID's	1012	SWAB - E. coli/total coliforms
1030	AIR Culture - Fungal Count w/ ID's	1028	SWAB - Sewage Screen (E. coli/Entero/fecal coliforms)
1006	SWAB Culture - Bacterial Count w/ ID's	2056	WATER - Heterotrophic Plate Count
1031	SWAB Culture - Fungal Count w/ ID's	3001	ASBESTOS - Point count
1008	BULK Culture - Bacterial Count w/ ID's	3002	ASBESTOS - PLM Analysis
1033	BULK Culture - Fungal Count w/ ID's	3003	ASBESTOS - Particle characterization
1007	WATER Culture - Bacterial Count w/ID's	3004	ASBESTOS - PCM Analysis

ALL SAMPLES ACCEPTABLE
INIT/DATE 09/27/22 JV

NVLAP
TESTING NVLAP LAB CODE 500097-0

Aerobiology Laboratory Associates, Incorporated
A Pace Analytical® Laboratory

Aerobiology Laboratory Associates, Inc.
2226 W Northern Ave. Suite C-110
Phoenix, AZ 85021
(602) 441-3700
www.aerobiology.net

Certificate of Analysis

Client:
Dominion Environmental Consultants, Inc
20045 N. 19th Ave Building 7
Phoenix, AZ 85027
Attn: Ryan Kuhn

Project Name: 292372/AZ0959.3201 Kyrene Middle School (NM)
Project ID: 22039698

Date Collected:	09/27/2022
Date Received:	09/27/2022
Date Analyzed:	09/27/2022
Date Reported:	09/27/2022

Test Requested: **Asbestos Bulk Analysis, Polarized Light Microscopy (PLM)**: EPA 600/R-93/116 Method for Asbestos in Bulk Building Materials, EPA-40 CFR Appendix E to Subpart E of Part 763, Interim Method for Asbestos in Bulk Insulation Samples

Total Samples Submitted:	18
Total Samples Analyzed:	18
Total Samples with Asbestos (≥1%):	0

Location: PLM-1 White 4"x4" Ceramic Wall Tile, Mastic, Grout Lab ID: 22039698-001

Physical Description of Sample/Layer	Asbestos Detected
White/Cream Tile	ND
Cream Mastic	ND
Gray Grout	ND

Location: PLM-2 White 4"x4" Ceramic Wall Tile, Mastic, Grout Lab ID: 22039698-002

Physical Description of Sample/Layer	Asbestos Detected
White/Cream Tile	ND
Cream Mastic	ND
Gray Grout	ND

Location: PLM-3 White 4"x4" Ceramic Wall Tile, Mastic, Grout Lab ID: 22039698-003

Physical Description of Sample/Layer	Asbestos Detected
White/Cream Tile	ND
Cream Mastic	ND
Gray Grout	ND

Location: PLM-4 Green 4"x4" Ceramic Wall Tile Lab ID: 22039698-004

Physical Description of Sample/Layer	Asbestos Detected
Green/Cream Tile	ND

Location: PLM-5 Green 4"x4" Ceramic Wall Tile Lab ID: 22039698-005

Physical Description of Sample/Layer	Asbestos Detected
Green/Cream Tile	ND

Location: PLM-6 Green 4"x4" Ceramic Wall Tile Lab ID: 22039698-006

Physical Description of Sample/Layer	Asbestos Detected
Green/Cream Tile	ND

Location: PLM-7 Blue 4"x4" Ceramic Wall Tile Lab ID: 22039698-007

Physical Description of Sample/Layer	Asbestos Detected
Emerald Green/White Tile	ND

Elle Teague
Analyst

Elle Teague
Manager-Asbestos

A Amosite
AC Actinolite
AN Anthophyllite
CHRY Chrysotile
CR Crocidolite
TR Tremolite
Trace Less Than 1%
ND None Detected

Non-Asbestos fiber percentage and matrix information available upon request

NVLAP
TESTING NVLAP LAB CODE 500097-0

Aerobiology Laboratory Associates, Incorporated
A Pace Analytical® Laboratory

Aerobiology Laboratory Associates, Inc.
2226 W Northern Ave. Suite C-110
Phoenix, AZ 85021
(602) 441-3700
www.aerobiology.net

Client:
Dominion Environmental Consultants, Inc
20045 N. 19th Ave Building 7
Phoenix, AZ 85027
Attn: Ryan Kuhn

Certificate of Analysis

Project Name: 292372/AZ0959.3201 Kyrene Middle School (NM)

Project ID: 22039698

Date Collected: 09/27/2022
Date Received: 09/27/2022
Date Analyzed: 09/27/2022
Date Reported: 09/27/2022

Test Requested: **Asbestos Bulk Analysis, Polarized Light Microscopy (PLM)**: EPA 600/R-93/116 Method for Asbestos in Bulk Building Materials, EPA-40 CFR Appendix E to Subpart E of Part 763, Interim Method for Asbestos in Bulk Insulation Samples

Location: PLM-8 Blue 4"x4" Ceramic Wall Tile Lab ID: 22039698-008

Physical Description of Sample/Layer	Asbestos Detected
Emerald Green/White Tile	ND

Location: PLM-9 Blue 4"x4" Ceramic Wall Tile Lab ID: 22039698-009

Physical Description of Sample/Layer	Asbestos Detected
Emerald Green/White Tile	ND

Location: PLM-10 Fixture Caulking Lab ID: 22039698-010

Physical Description of Sample/Layer	Asbestos Detected
White Caulk	ND

Location: PLM-11 Fixture Caulking Lab ID: 22039698-011

Physical Description of Sample/Layer	Asbestos Detected
White Caulk	ND

Location: PLM-12 Fixture Caulking Lab ID: 22039698-012

Physical Description of Sample/Layer	Asbestos Detected
White Caulk	ND

Location: PLM-13 RR Greenboard D.W. Lab ID: 22039698-013

Physical Description of Sample/Layer	Asbestos Detected
Brown/Tan/Green Drywall	ND
Cream Mastic	ND

Location: PLM-14 RR Greenboard D.W. Lab ID: 22039698-014

Physical Description of Sample/Layer	Asbestos Detected
Brown/Tan/Green Drywall	ND
Cream Mastic	ND

Location: PLM-15 RR Greenboard D.W. Lab ID: 22039698-015

Physical Description of Sample/Layer	Asbestos Detected
Brown/Tan/Green Drywall	ND
Cream Mastic	ND

Elle Teague
Analyst

Elle Teague
Manager-Asbestos

A Amosite
AC Actinolite
AN Anthophyllite
CHRY Chrysotile
CR Crocidolite
TR Tremolite
Trace Less Than 1%
ND None Detected

Non-Asbestos fiber percentage and matrix information available upon request

TESTING NVLAP LAB CODE 500097-0

Aerobiology Laboratory Associates, Inc.
2226 W Northern Ave. Suite C-110
Phoenix, AZ 85021
(602) 441-3700
www.aerobiology.net

Certificate of Analysis

Client:
Dominion Environmental Consultants, Inc
20045 N. 19th Ave Building 7
Phoenix, AZ 85027
Attn: Ryan Kuhn

Project Name: 292372/AZ0959.3201 Kyrene Middle School (NM)
Project ID: 22039698

Date Collected: 09/27/2022
Date Received: 09/27/2022
Date Analyzed: 09/27/2022
Date Reported: 09/27/2022

Test Requested: **Asbestos Bulk Analysis, Polarized Light Microscopy (PLM)**: EPA 600/R-93/116 Method for Asbestos in Bulk Building Materials, EPA-40 CFR Appendix E to Subpart E of Part 763, Interim Method for Asbestos in Bulk Insulation Samples

Location: PLM-16 Counter Caulking Lab ID: 22039698-016

Physical Description of Sample/Layer	Asbestos Detected
White Caulk	ND

Location: PLM-17 Counter Caulking Lab ID: 22039698-017

Physical Description of Sample/Layer	Asbestos Detected
White Caulk	ND

Location: PLM-18 Counter Caulking Lab ID: 22039698-018

Physical Description of Sample/Layer	Asbestos Detected
White Caulk	ND

Elle Teague
Analyst

Elle Teague
Manager-Asbestos

A Amosite
AC Actinolite
AN Anthophyllite
CHRY Chrysotile
CR Crocidolite
TR Tremolite
Trace Less Than 1%
ND None Detected

Non-Asbestos fiber percentage and matrix information available upon request

Aerobiology Laboratory Associates, Inc.
2226 W Northern Ave. Suite C-110
Phoenix, AZ 85021
(602) 441-3700
www.aerobiology.net

Client:
Dominion Environmental Consultants, Inc
20045 N. 19th Ave Building 7
Phoenix, AZ 85027
Attn: Ryan Kuhn

Certificate of Analysis

Project Name: 292372/AZ0959.3201 Kyrene Middle School (NM)

Project ID: 22039698

Date Collected: 09/27/2022
Date Received: 09/27/2022
Date Analyzed: 09/27/2022
Date Reported: 09/27/2022

General Notes

* **ND** indicates no asbestos was detected.

* The method detection limit is 1%.

* **Trace** or "<1" indicates asbestos was identified in the sample, but the concentration is less than 1%.

* All regulated asbestos minerals (i.e. chrysotile, amosite, crocidolite, anthophyllite, tremolite, and actinolite) were sought in every layer of each sample, but only those asbestos minerals detected are listed. Amosite is the common name for the asbestiform variety of the minerals cummingtonite and grunerite. Crocidolite is the common name used for the asbestiform variety of the mineral riebeckite.

* Tile, vinyl, foam, plastic, and fine powder samples may contain asbestos fibers of such small diameter (< 0.25 microns in diameter) that these fibers cannot be detected by PLM. For such samples, more sensitive analytical methods (e.g. TEM, SEM, and XRD) are recommended if greater certainty about asbestos content is required. Semi-quantitative bulk TEM floor tile analysis is accepted under NESHAP regulations.

* These results are submitted pursuant to Aerobiology Laboratory Associates, Inc.'s current terms and conditions of sale, including the company's standard warranty and limitation of liability provisions. No responsibility or liability is assumed for the manner in which the results are used or interpreted.

* Unless notified in writing to return the samples covered by this report, Aerobiology Laboratory Associates, Inc. will store the samples for a minimum period of thirty (30) days before discarding. A shipping and handling charge will be assessed for the return of any samples.

* Aerobiology does not guarantee the results of tape lifts, microvacs, wipe, and/or debris samples. Accurate analysis cannot be performed due to particle size, media used, and/or amount of material given. Analysis of these materials should be performed by a TEM. A result of ND does not indicate that the sample area does not contain asbestos. It means the analyst could not identify asbestos in the specific sample for the reasons listed above.

Notes Required by NVLAP

* Aerobiology Laboratory shall be responsible for all the information provided in the report, except when information is provided by the customer. Aerobiology Laboratory is not responsible for the sampling activity.

* This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

* This test report relates only to the items tested or calibrated.

* This report is not valid unless it bears the name of a NVLAP-approved signatory.

* Any reproduction of this document must include the entire document in order for the report to be valid.

eurofins | Built Environment Testing

Report for:

Nick Marcos
Dominion Environmental Consultants, Inc.
20045 N. 19th Ave, Bldg 7
Phoenix, AZ 85027

Regarding: Eurofins Aerotech Built Environment Testing, LLC
Project: AZ1418.57; Kyrene Middle School - Bldg. K
EML ID: 4110230

Approved by:



Approved Signatory
Renee Luna-Trepczynski

Dates of Analysis:
Asbestos PLM: 06-18-2025

Service SOPs: Asbestos PLM (EPA 40CFR App E to Sub E of Part 763 & EPA METHOD 600/R-93-116, SOP EB-AS-S-1267)
NVLAP Lab Code 500031-0

All samples were received in acceptable condition unless noted in the Report Comments portion in the body of the report. The results relate only to the samples as received and tested. The results include an inherent uncertainty of measurement associated with estimating percentages by polarized light microscopy. Measurement uncertainty data for sample results with >1% asbestos concentration can be provided when requested.

Eurofins Aerotech Built Environment Testing, LLC ("the Company"), a member of the Eurofins Built Environment Testing group of companies, shall have no liability to the client or the client's customer with respect to decisions or recommendations made, actions taken or courses of conduct implemented by either the client or the client's customer as a result of or based upon the Test Results. In no event shall the Company be liable to the client with respect to the Test Results except for the Company's own willful misconduct or gross negligence nor shall the Company be liable for incidental or consequential damages or lost profits or revenues to the fullest extent such liability may be disclaimed by law, even if the Company has been advised of the possibility of such damages, lost profits or lost revenues. In no event shall the Company's liability with respect to the Test Results exceed the amount paid to the Company by the client therefor.

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. K

Date of Sampling: 06-11-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Total Samples Submitted:	18
Total Samples Analyzed:	18
Total Samples with Layer Asbestos Content > 1%:	0

Location: PLM 1, Batt Insulation

Lab ID-Version‡: 20512366-1

Sample Layers	Asbestos Content
Brown/Black Wrap	ND
Pink Insulation	ND
Composite Non-Asbestos Content:	60% Glass Fibers 15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM 2, Batt Insulation

Lab ID-Version‡: 20512367-1

Sample Layers	Asbestos Content
Brown/Black Wrap	ND
Pink Insulation	ND
Composite Non-Asbestos Content:	60% Glass Fibers 15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM 3, Batt Insulation

Lab ID-Version‡: 20512368-1

Sample Layers	Asbestos Content
Brown/Black Wrap	ND
Pink Insulation	ND
Composite Non-Asbestos Content:	60% Glass Fibers 15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM 4, 2' x 4' Ceiling Tile

Lab ID-Version‡: 20512369-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. K

Date of Sampling: 06-11-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM 5, 2' x 4' Ceiling Tile Lab ID-Version‡: 20512370-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM 6, 2' x 4' Ceiling Tile Lab ID-Version‡: 20512371-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose
Sample Composite Homogeneity:	Moderate

Location: PLM 7, 2' x 2' Ceiling Tile Lab ID-Version‡: 20512372-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 8, 2' x 2' Ceiling Tile Lab ID-Version‡: 20512373-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. K

Date of Sampling: 06-11-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM 9, 2' x 2' Ceiling Tile Lab ID-Version‡: 20512374-1

Sample Layers	Asbestos Content
Gray Ceiling Tile with White Surface	ND
Composite Non-Asbestos Content:	65% Cellulose 5% Glass Fibers
Sample Composite Homogeneity:	Moderate

Location: PLM 10, Orange Peel D.W. (Paint, Tex, Tape, J.C., D.W.) Lab ID-Version‡: 20512375-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

Location: PLM 11, Orange Peel D.W. (Paint, Tex, Tape, J.C., D.W.) Lab ID-Version‡: 20512376-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. K

Date of Sampling: 06-11-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM 12, Orange Peel D.W. (Paint, Tex, Tape, J.C., D.W.) Lab ID-Version‡: 20512377-1

Sample Layers	Asbestos Content
White Paint	ND
White Texture	ND
Cream Tape	ND
White Joint Compound	ND
White Drywall with Brown Paper	ND
Composite Non-Asbestos Content:	15% Cellulose
Sample Composite Homogeneity:	Poor

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. K

Date of Sampling: 06-11-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM 13, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20512378-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Transparent Mastic	ND
Gray Cementitious Material	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM 14, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20512379-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Transparent Mastic	ND
Gray Cementitious Material	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM 15, Gray Multi-Color Carpet Square and Mastic

Lab ID-Version‡: 20512380-1

Sample Layers	Asbestos Content
Multicolored Carpet	ND
Transparent Mastic	ND
Gray Cementitious Material	ND
Composite Non-Asbestos Content:	60% Synthetic Fibers 2% Glass Fibers
Sample Composite Homogeneity:	Poor

Location: PLM 16, Blue Cove Base and Mastic

Lab ID-Version‡: 20512381-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built

Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. K

Date of Sampling: 06-11-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

Location: PLM 17, Blue Cove Base and Mastic

Lab ID-Version‡: 20512382-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

Location: PLM 18, Blue Cove Base and Mastic

Lab ID-Version‡: 20512383-1

Sample Layers	Asbestos Content
Blue Cove Base	ND
Tan Mastic	ND
Sample Composite Homogeneity:	Moderate

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

All components not quantified as asbestos content and non-asbestos content are considered to be non-fibrous matrix components. Matrix components may include, but are not limited to, gypsum, paint, silicate minerals, vinyl, binder, calcium carbonate, tar, and foam.

Inhomogeneous samples are separated into homogeneous subsamples and analyzed individually. ND means no fibers were detected. When detected, the minimum detection and reporting limit is less than 1% unless point counting is performed. Floor tile samples may contain large amounts of interference material and it is recommended that the sample be analyzed by gravimetric point count analysis to lower the detection limit and to aid in asbestos identification.
‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

Eurofins Aerotech Built Environment Testing, LLC
1501 West Knudsen Drive, Phoenix, AZ 85027
(800) 651-4802 www.eurofinsus.com/Built


Client: Dominion Environmental Consultants, Inc.
C/O: Nick Marcos
Re: AZ1418.57; Kyrene Middle School - Bldg. K

Date of Sampling: 06-11-2025
Date of Receipt: 06-13-2025
Date of Report: 06-18-2025

ASBESTOS PLM REPORT

PROJECT ANALYST AND SIGNATORY REPORT

Project Analyst

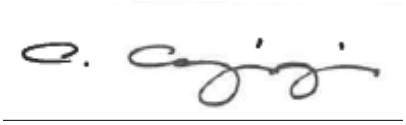

Analyst: Aaron Agajanian

The test report shall not be reproduced except in full, without written approval of the laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. The Company reserves the right to dispose of all samples after a period of thirty (30) days, according to all state and federal guidelines, unless otherwise specified.

‡ A "Version" indicated by -"x" after the Lab ID# with a value greater than 1 indicates a sample with amended data. The revision number is reflected by the value of "x".

CHAIN OF CUSTODY

www.eurofinsus.com/Built

eurofins | Built Environment Testing

East:(866) 871-1984
West/Central:(800) 651-4802

WEATHER		Fog	Rain	Snow	Wind	Clear
LEVEL	None					
	Light					
	Moderate					
	Heavy					

004110230

CONTACT INFORMATION		
Company:	Dominion Environmental Consultants	Address:20045 N. 19th Ave., Phx, AZ 85027
Contact:	Nick Marcos	Special Instructions:
Phone:	623-516-1415	

PROJECT INFORMATION			
Project ID:	AZ1418.57		
Project Description:	Kyrene Middle School - Bldg. K		
Project Zip Code:		Sampling Date/Time:	6/11/2025
PO Number:	13741	Sampled By:	NM

TURN AROUND TIME CODES - (TAT)	
STD - Standard (Default)	Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs.
ND - Next Business Day	
SD - Same Business Day	
WH - Weekend/Holiday/ASAP	

SAMPLE ID	DESCRIPTION	Sample Type (Below)	TAT (Above)	Total Volume/Area (as applicable)	NOTES (Time of day, Temp, RH, etc.)
PLM 1-3	Batt Insulation and Backing	B	STD		
PLM 4-6	2' X 4' Ceiling Tile	B	STD		
PLM 7-9	2' X 2' Ceiling Tile	B	STD		
PLM 10-12	Orange Peel D.W. (Paint,tex,tape,j.c.,d.w.)	B	STD		
PLM 13-15	Gray Multi-Color Carpet Square and Mastic	B	STD		
PLM 16-18	Blue Cove Base and Mastic	B	STD		

Non-Culturable

Other Requests

Spore Trap	Swab	Spore Trap Analysis	Other biological particles - supplement	Direct Microscopic Exam (Qualitative)	Qualitative spore count direct exam	Dust Characterization	1-Media Surface Fungi (Genus ID + *Asp.* spp.)	Culturable Air Fungi (Genus ID + *Asp.* spp.)	Gram Stain and Counts (Culturable Air and Surface Bact	*Legionella* culture	Total Coliform, *E.coli* (Presence/Absence)	QuantiTray-Sewage Screen	OTHER: (please specify test)		Asbestos in Air - PCM Airborne Fiber Count (NIOSH 740	Asbestos Bulk - PLM (EPA method 600/R-93-116)	Lead (Pb) / Paint Chip	PCR (please specify test)	Allergens (please specify test)	
																X				
																X				
																X				
																X				
																X				
																X				

SAMPLE TYPE CODES			
BC - BioCassette™	**CP** - Contact Plate	**T** - Tape	**O** - Other:
A1S - Andersen	**ST** - Spore Trap	**SW** - Swab	
SAS - Surface Air Sampler	**B** - Bulk	**SO** - Soil	
NP - Non-potable Water	**P** - Potable Water	**D** - Dust	

RELINQUISHED BY	DATE & TIME
Nick Marcos	6/13/2025


RECEIVED BY	DATE & TIME
Patty Lago	6/13/25 11:53am

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at http://www.emlab.com/s/main/serviceterms.html

SECTION 10

♦

ASSUMED ACBM LOCATION MAPS

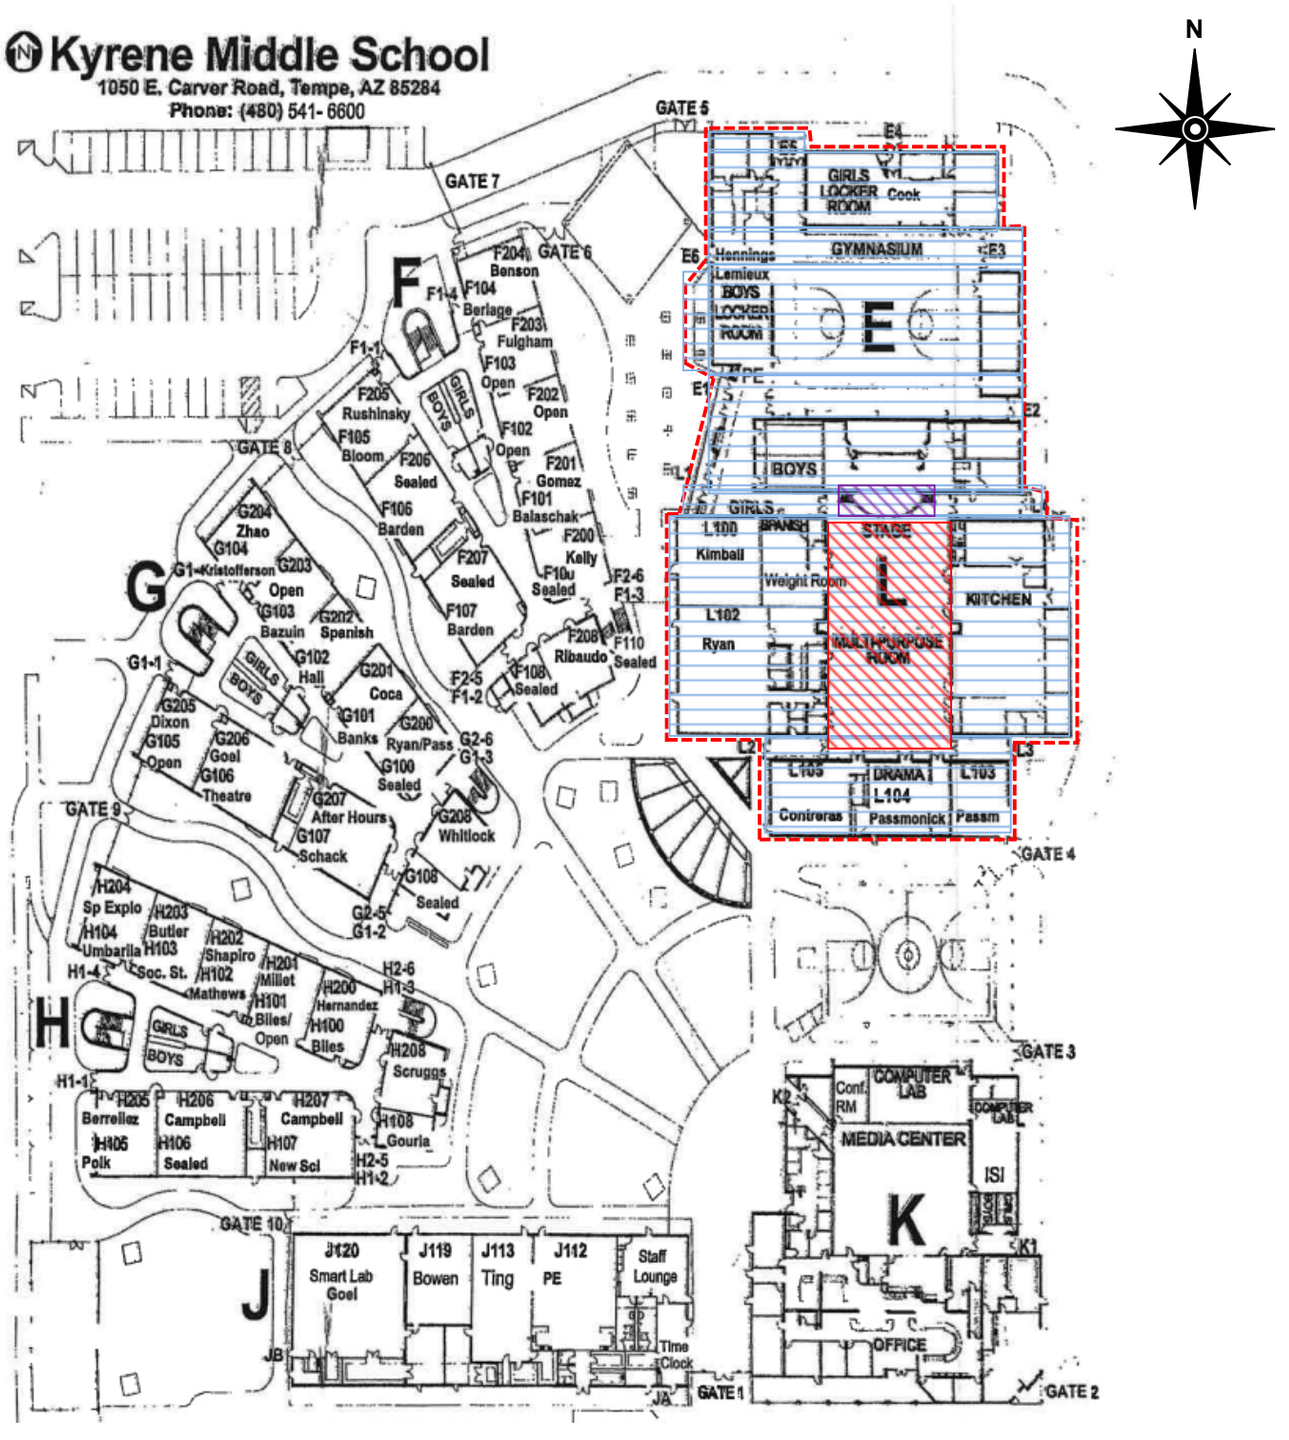

Assumed Asbestos-Containing
Brick & Mortar

Assumed Asbestos-Containing

Tacboard, Brown 6" x 6" Ceramic
Floor Tile, Grout, & Thinset,
Interior Caulking, &
Exterior Caulking

Assumed Asbestos-Containing
White w/Black 12" x 12" VCT
& Mastic


Assumed Asbestos-Containing
Black 12" x 12" VCT & Mastic
& Black Stair Tread & Mastic

Assumed Asbestos-Containing Material Location Map (1)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.57

Building E/L

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

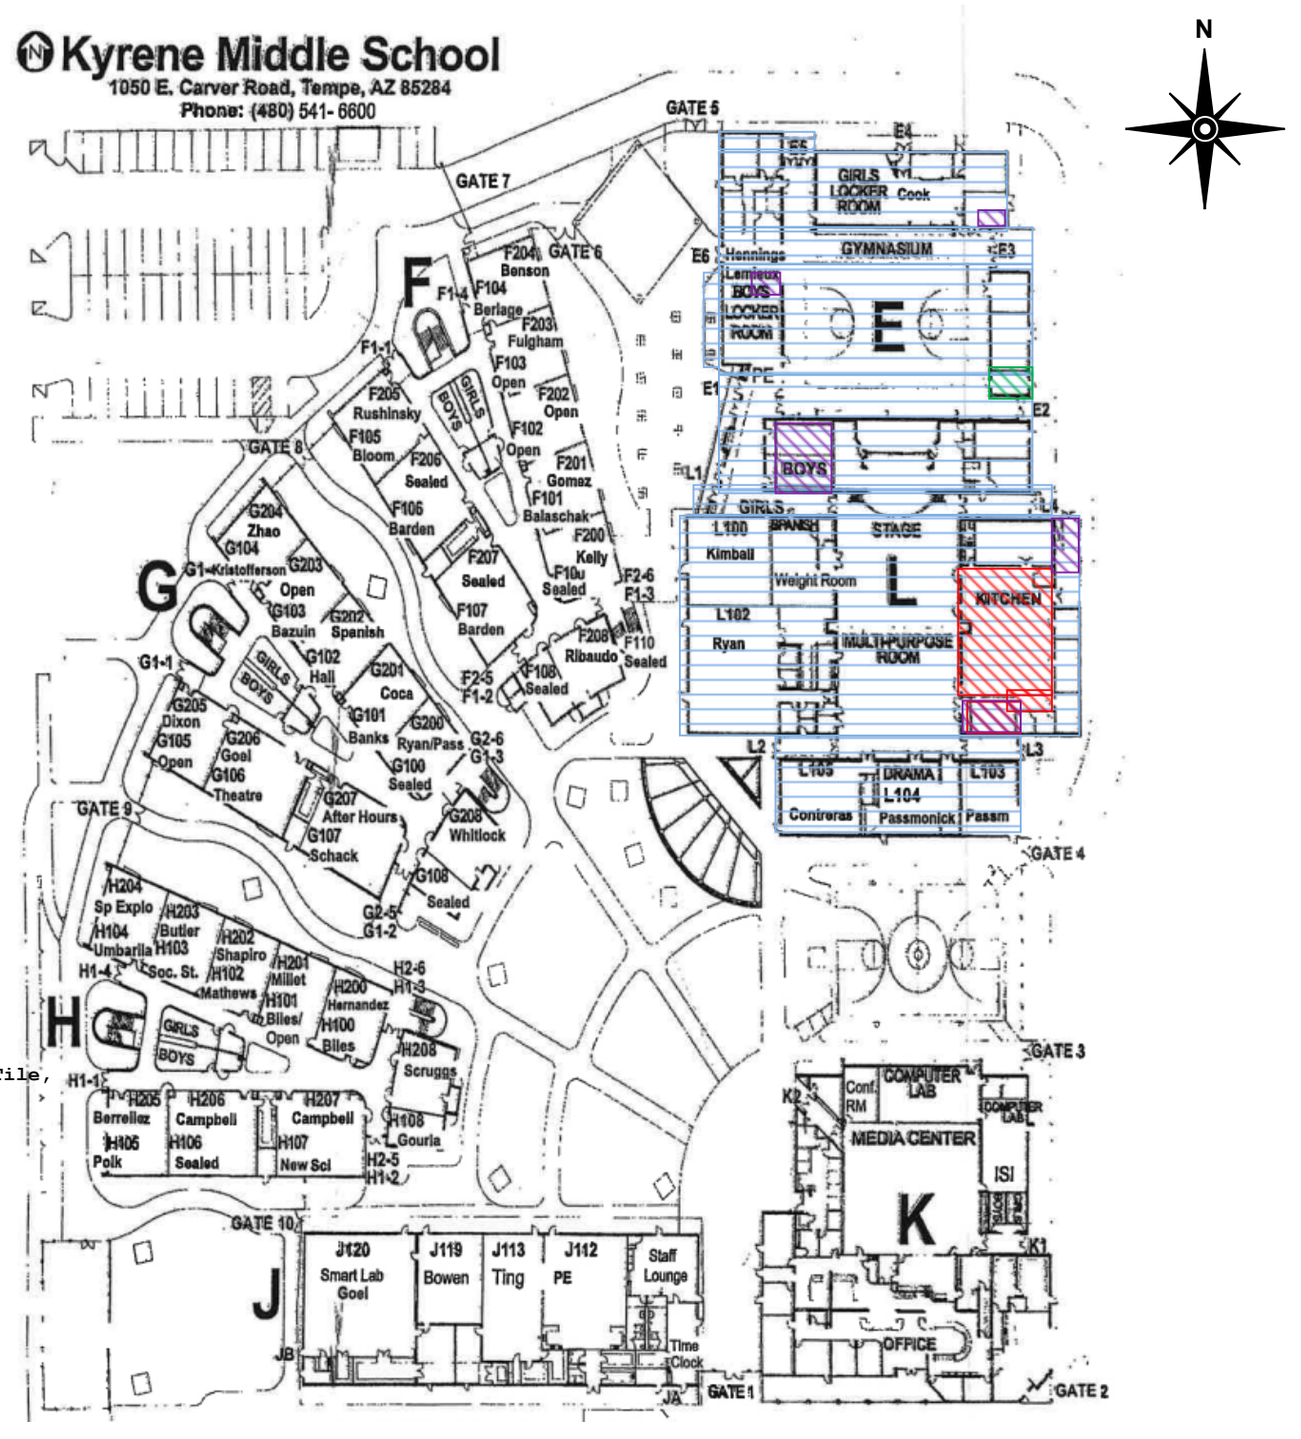


Assumed Asbestos-Containing Material Location Map (2)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.57

Building E/L

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

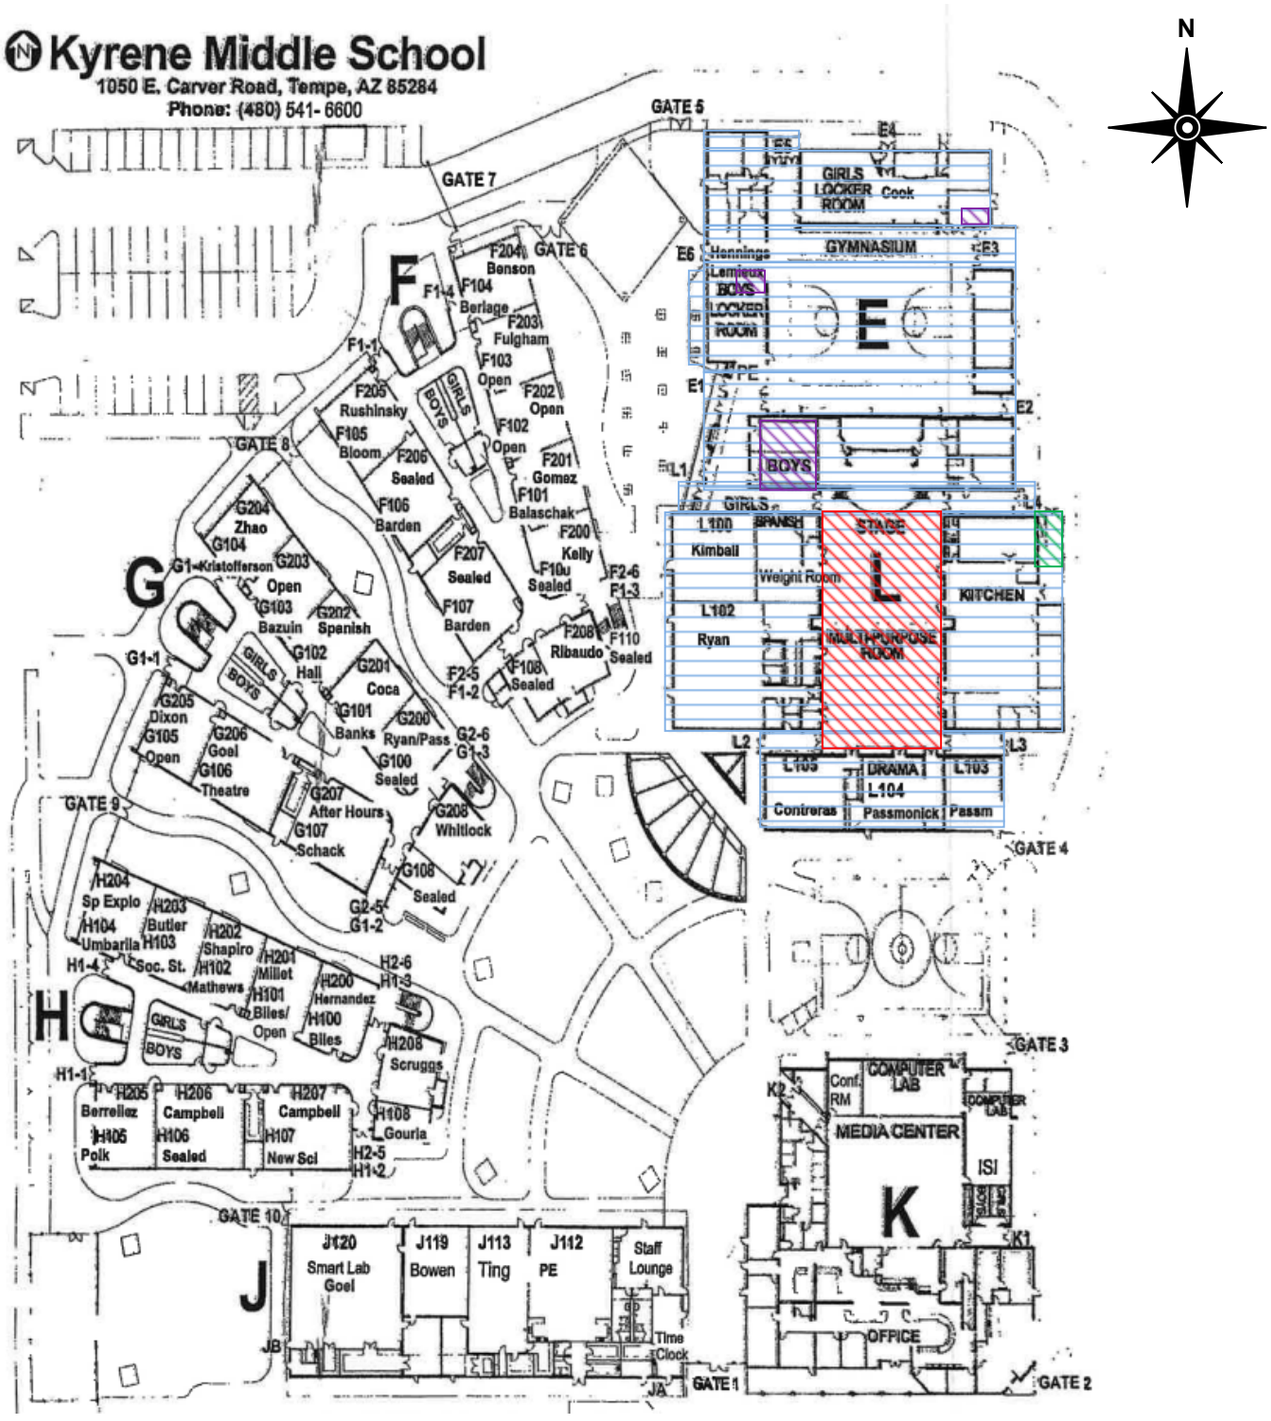

Assumed Asbestos-Containing
Fixture Caulking & Blue
4" x 4" Ceramic
Wall Tile

Assumed Asbestos-Containing


Tan 2" x 2" Ceramic Floor Tile,
Grout, & Thinset, Green
2" x 2" Ceramic Floor Tile,
Blue 2" x 2" Ceramic Floor Tile,
& Marble Threshold

Assumed Asbestos-Containing
Divider Wall

Assumed Asbestos-Containing
White w/Brown 4" x 4" Ceramic
Wall Tile, Grout, & Mastic
Green 4" x 4" Ceramic
Wall Tile, & Tan 4" x 4" Ceramic
Wall Tile, Grout, & Mastic


Assumed Asbestos-Containing Material Location Map (3) — Project No. AZ1418.57
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284 — Building E/L

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

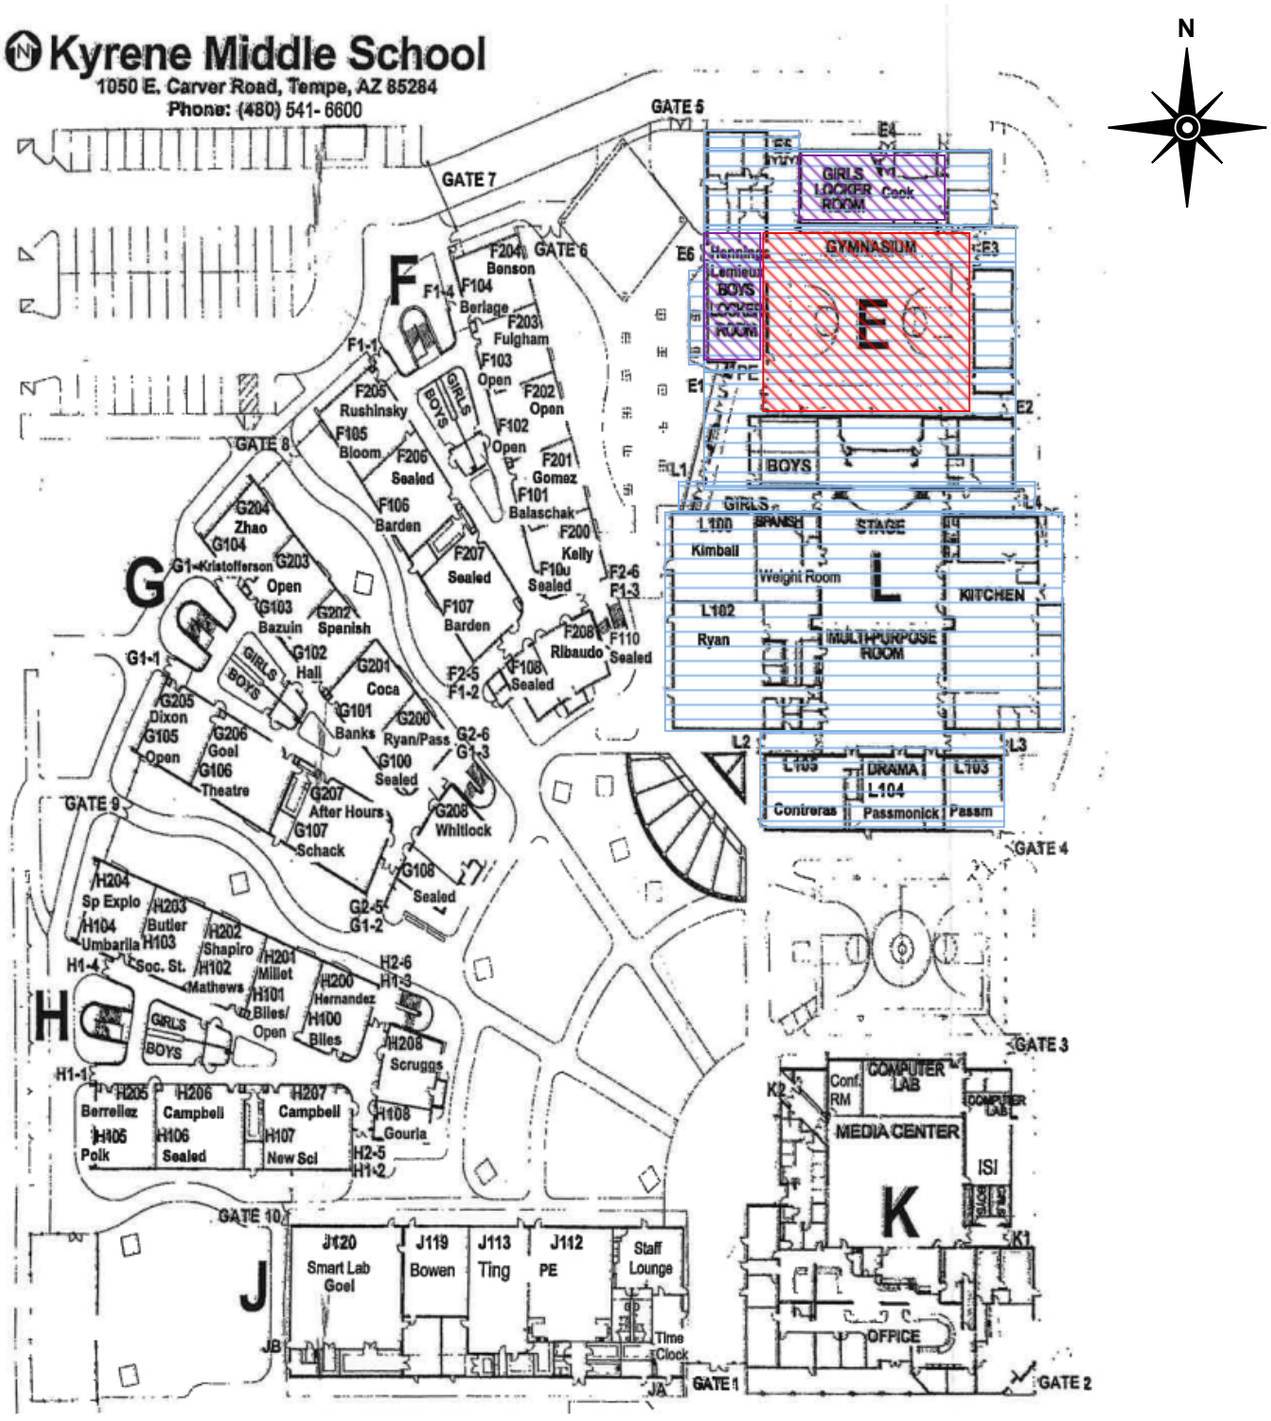

Assumed Asbestos-Containing Material Location Map (4) — Project No. AZ1418.57
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284 — Building E/L

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

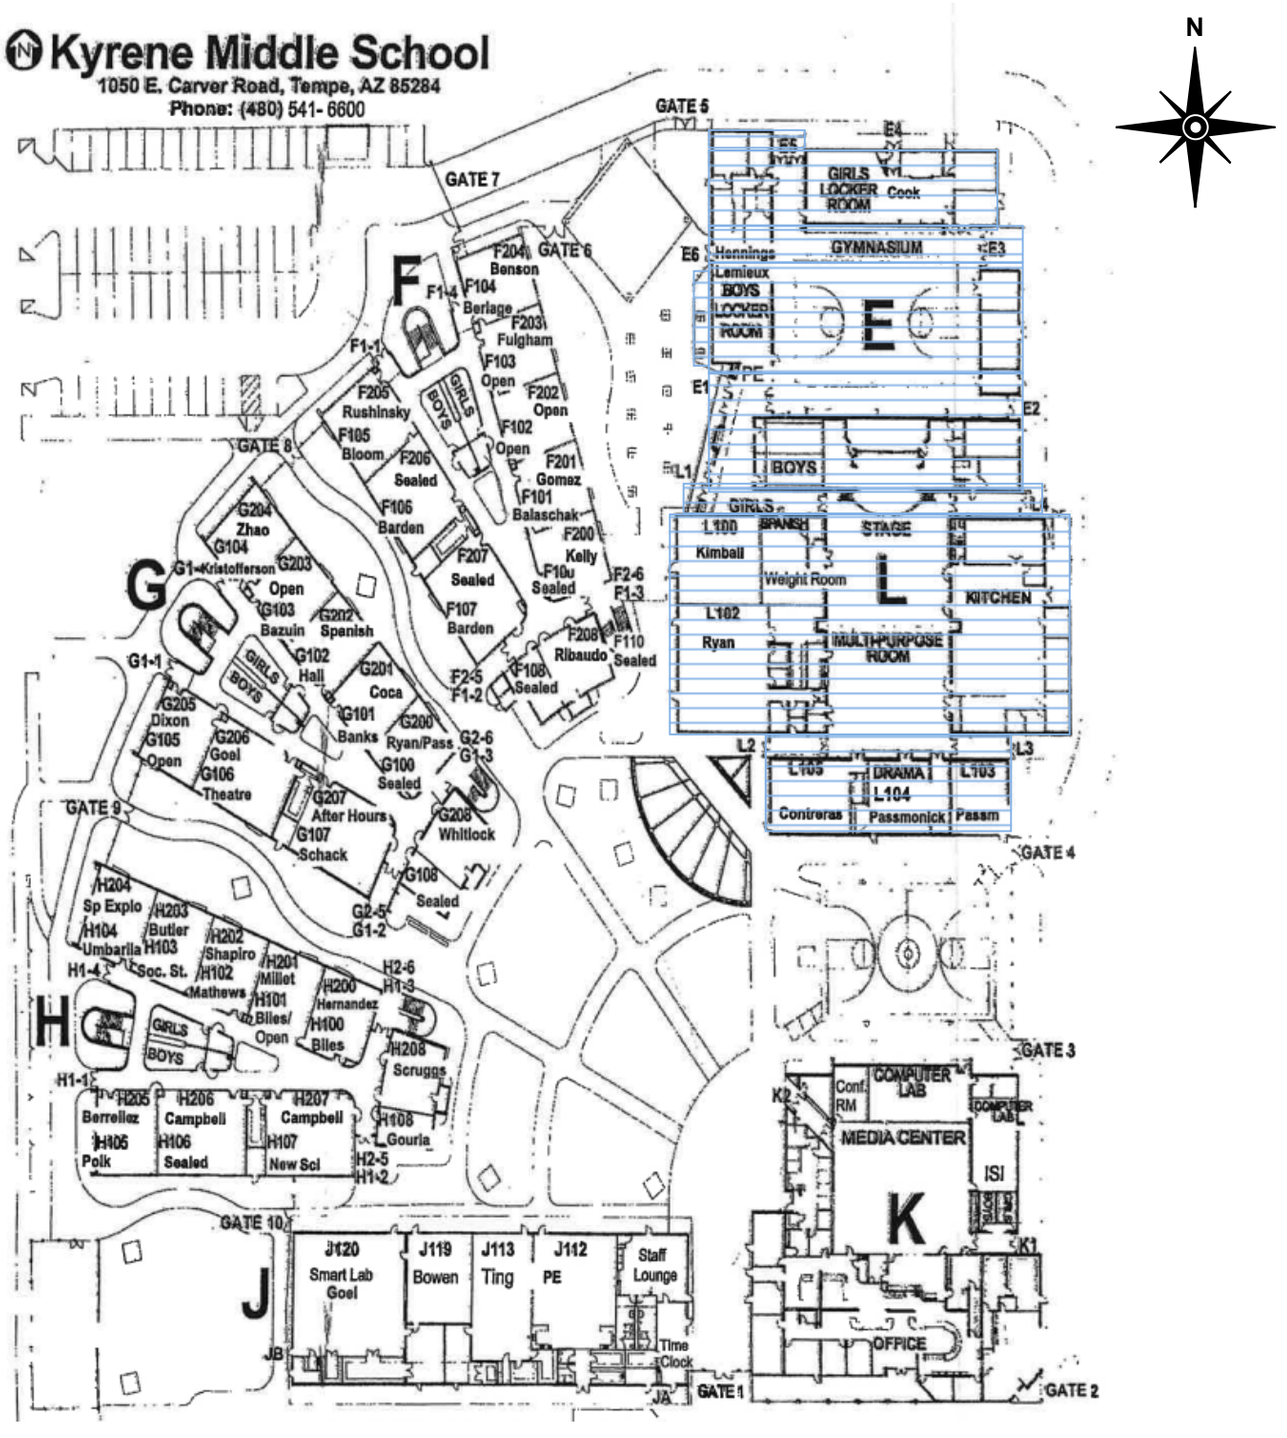


Assumed Asbestos-Containing

Skylight Insulation Panel,
Silver Flex Duct Wrap,
Large Silver Duct Wrap,
Small Silver Duct Wrap,
Unfinished Drywall System,
Gray Duct Mastic,
Black Foam Pipe Insulation,
White Pipe Wrap & Mastic

*** Above the Ceiling**

Assumed Asbestos-Containing Material Location Map (5) — Project No. AZ1418.57
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284 — Building E/L

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

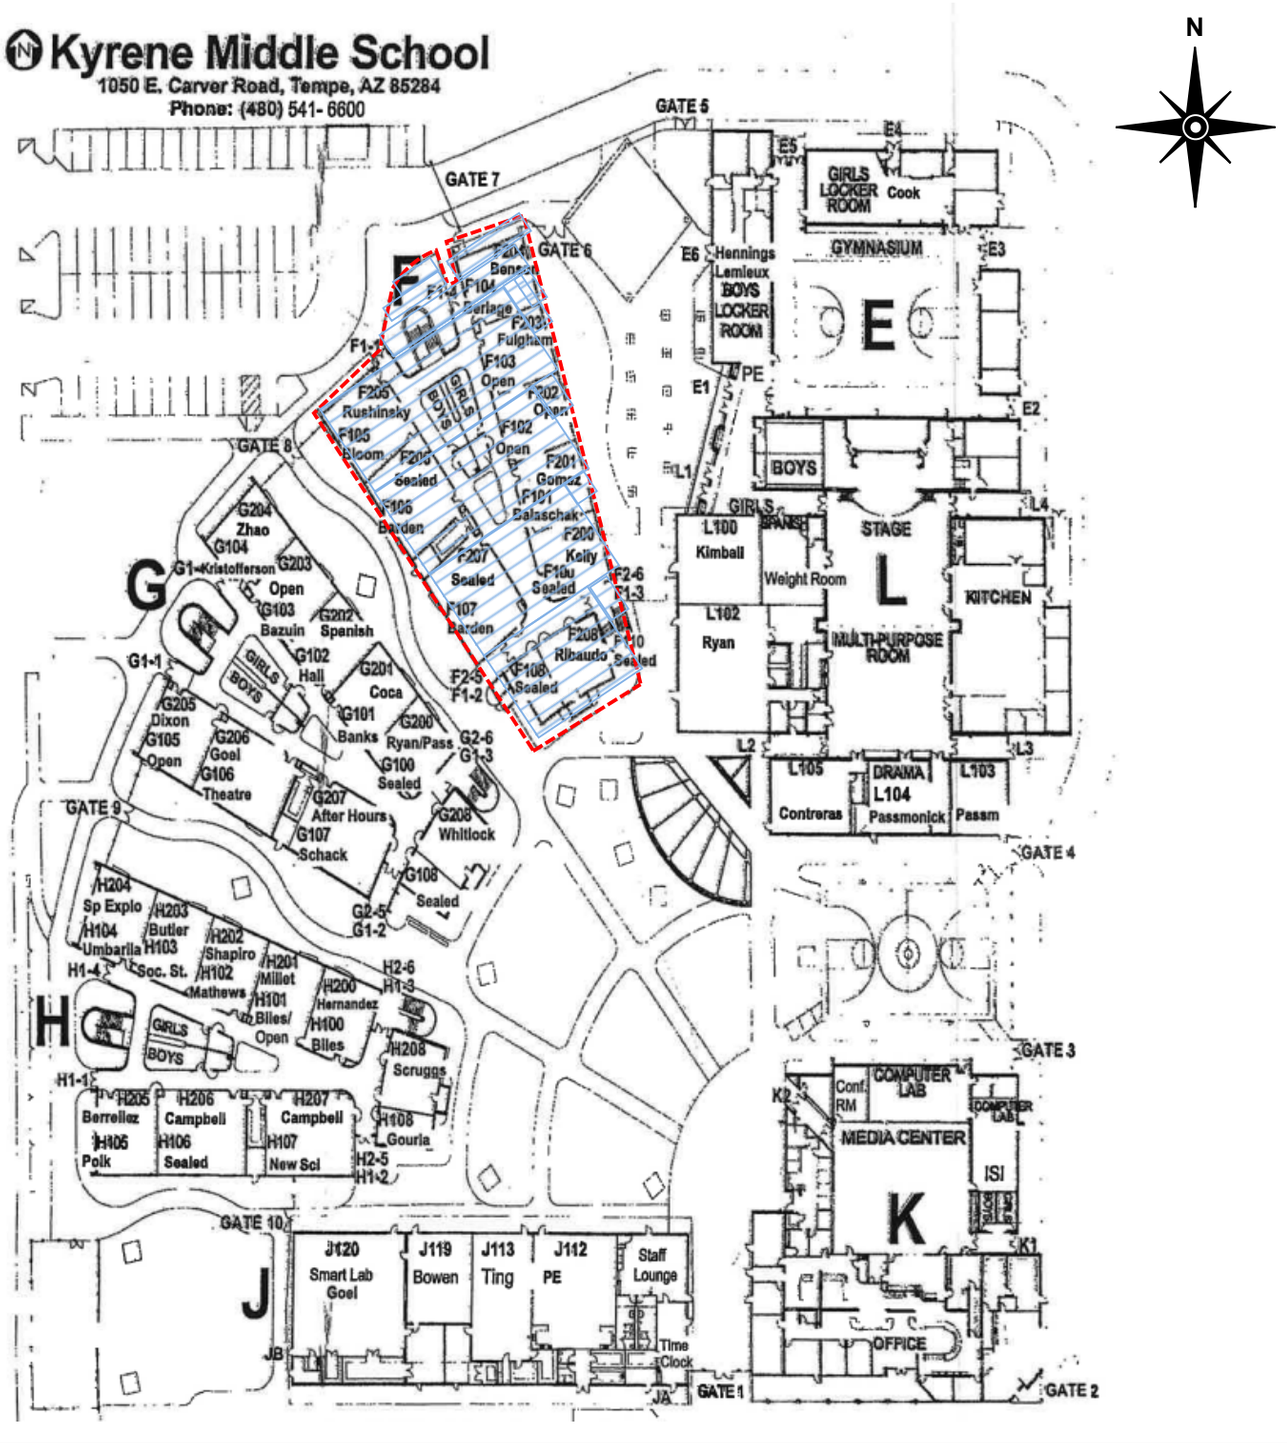

Assumed Asbestos-Containing

Divider Wall, Gray Sink Coating, Glass Block Mortar, Brick & Mortar, Tacboard, Tan 4" x 4" Ceramic Wall Tile, Grout, & Mastic, Blue 4" x 4" Ceramic Wall Tile, Green 4" x 4" Ceramic Wall Tile, Tan 2" x 2" Ceramic Floor Tile, Grout, & Thinset, Blue 2" x 2" Ceramic Floor Tile, & Green 2" x 2" Ceramic Floor Tile

---

Assumed Asbestos-Containing Exterior Caulking

Assumed Asbestos-Containing Material Location Map (1)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.57

Building F

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415



Assumed Asbestos-Containing


Interior Caulking,
Fixture Caulking, FRP & Mastic,
Gray 20 " x 20" Floor Tile &
Mastic, & Knockdown
Drywall System

Assumed Asbestos-Containing

Gray Stair Tread & Mastic

Assumed Asbestos-Containing Material Location Map (2) — Project No. AZ1418.57
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284 — Building F

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

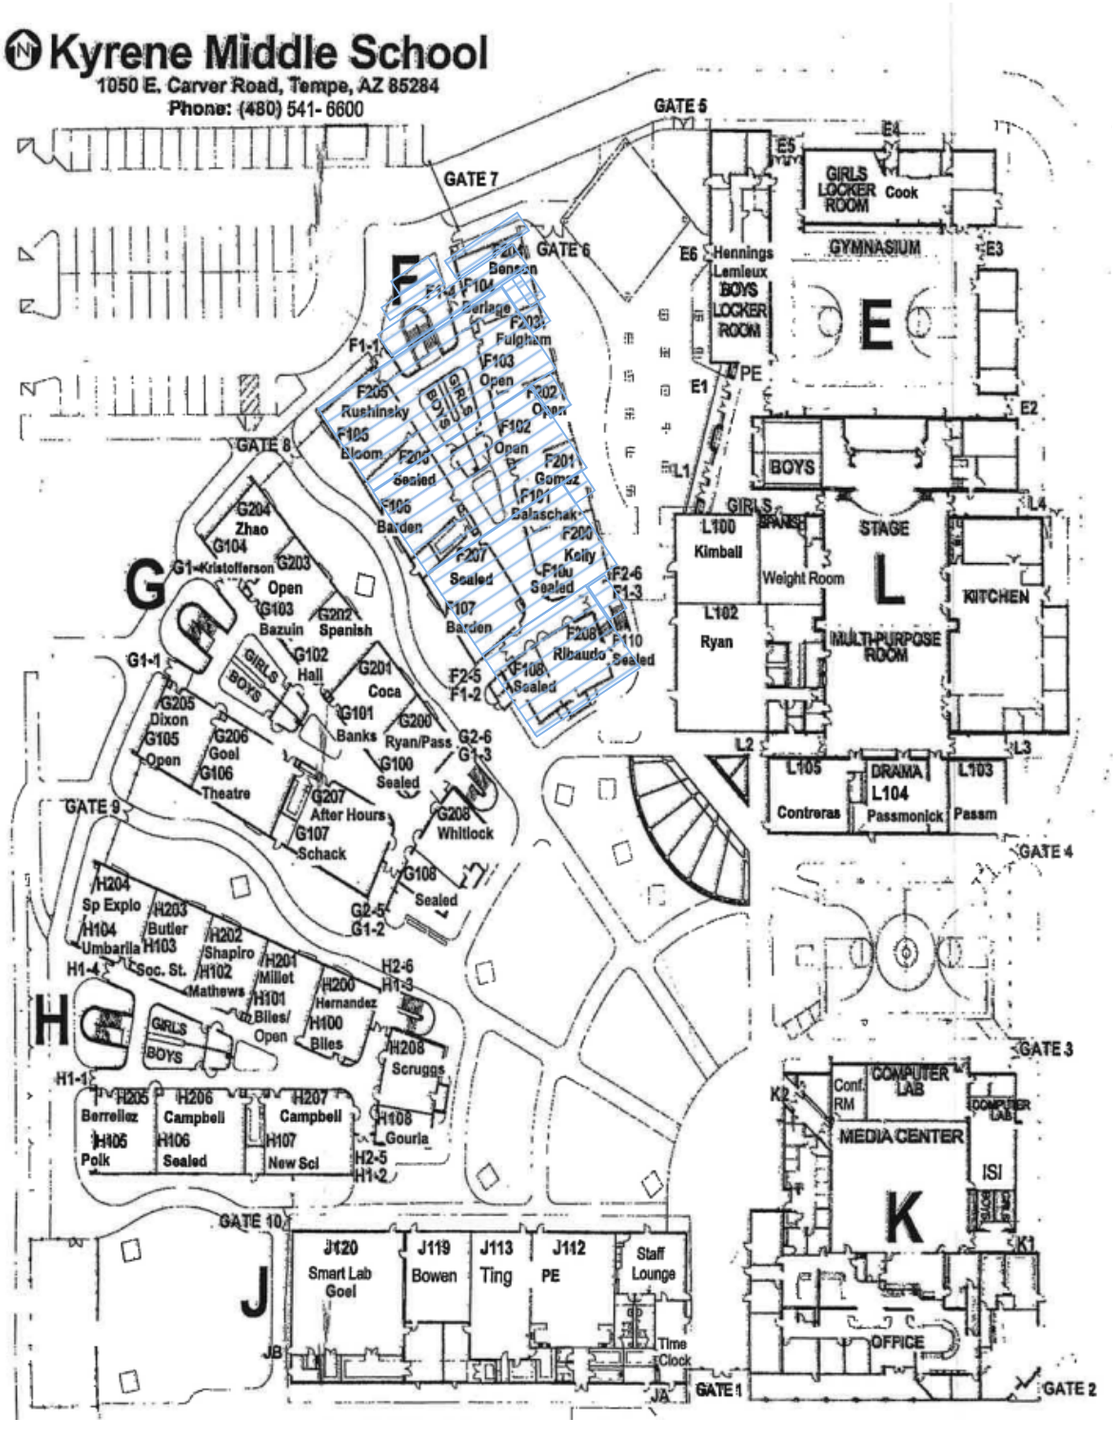


Assumed Asbestos-Containing

Silver Flex Duct Wrap,
Silver Box Duct Wrap,
Gray Duct Mastic,
Unfinished Drywall System,
Black Foam Pipe Insulation,
White Pipe Wrap & Insulation,
& Skylight Insulation Panel

* Above the Ceiling

Assumed Asbestos-Containing Material Location Map (3) — Project No. AZ1418.57
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284 — Building F

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

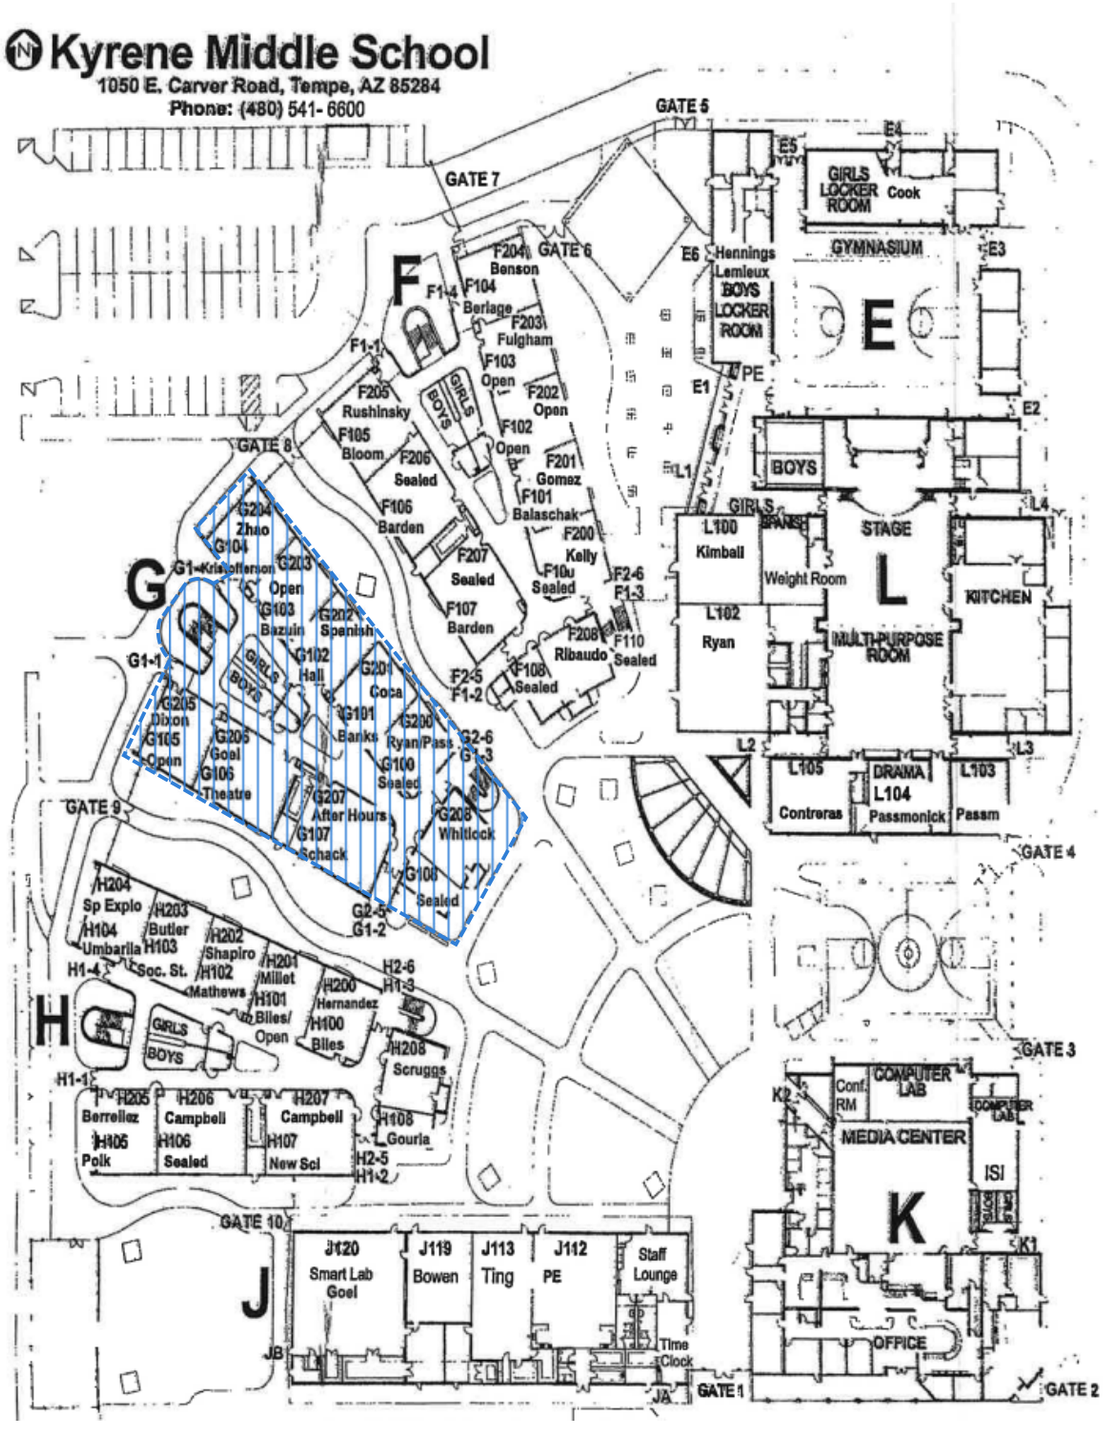


Assumed Asbestos-Containing

Divider Wall, Tacboard, Interior Caulking, White Sink Coating, White w/Black 12" x 12" VCT & Mastic, Brick & Mortar, Tan 4" x 4" Ceramic Wall Tile, Grout, & Mastic, Green 4" x 4" Ceramic Wall Tile, & Blue 4" x 4" Ceramic Wall Tile

Assumed Asbestos-Containing Exterior Caulking

Assumed Asbestos-Containing Material Location Map (1) — Project No. AZ1418.57
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284 — Building G

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

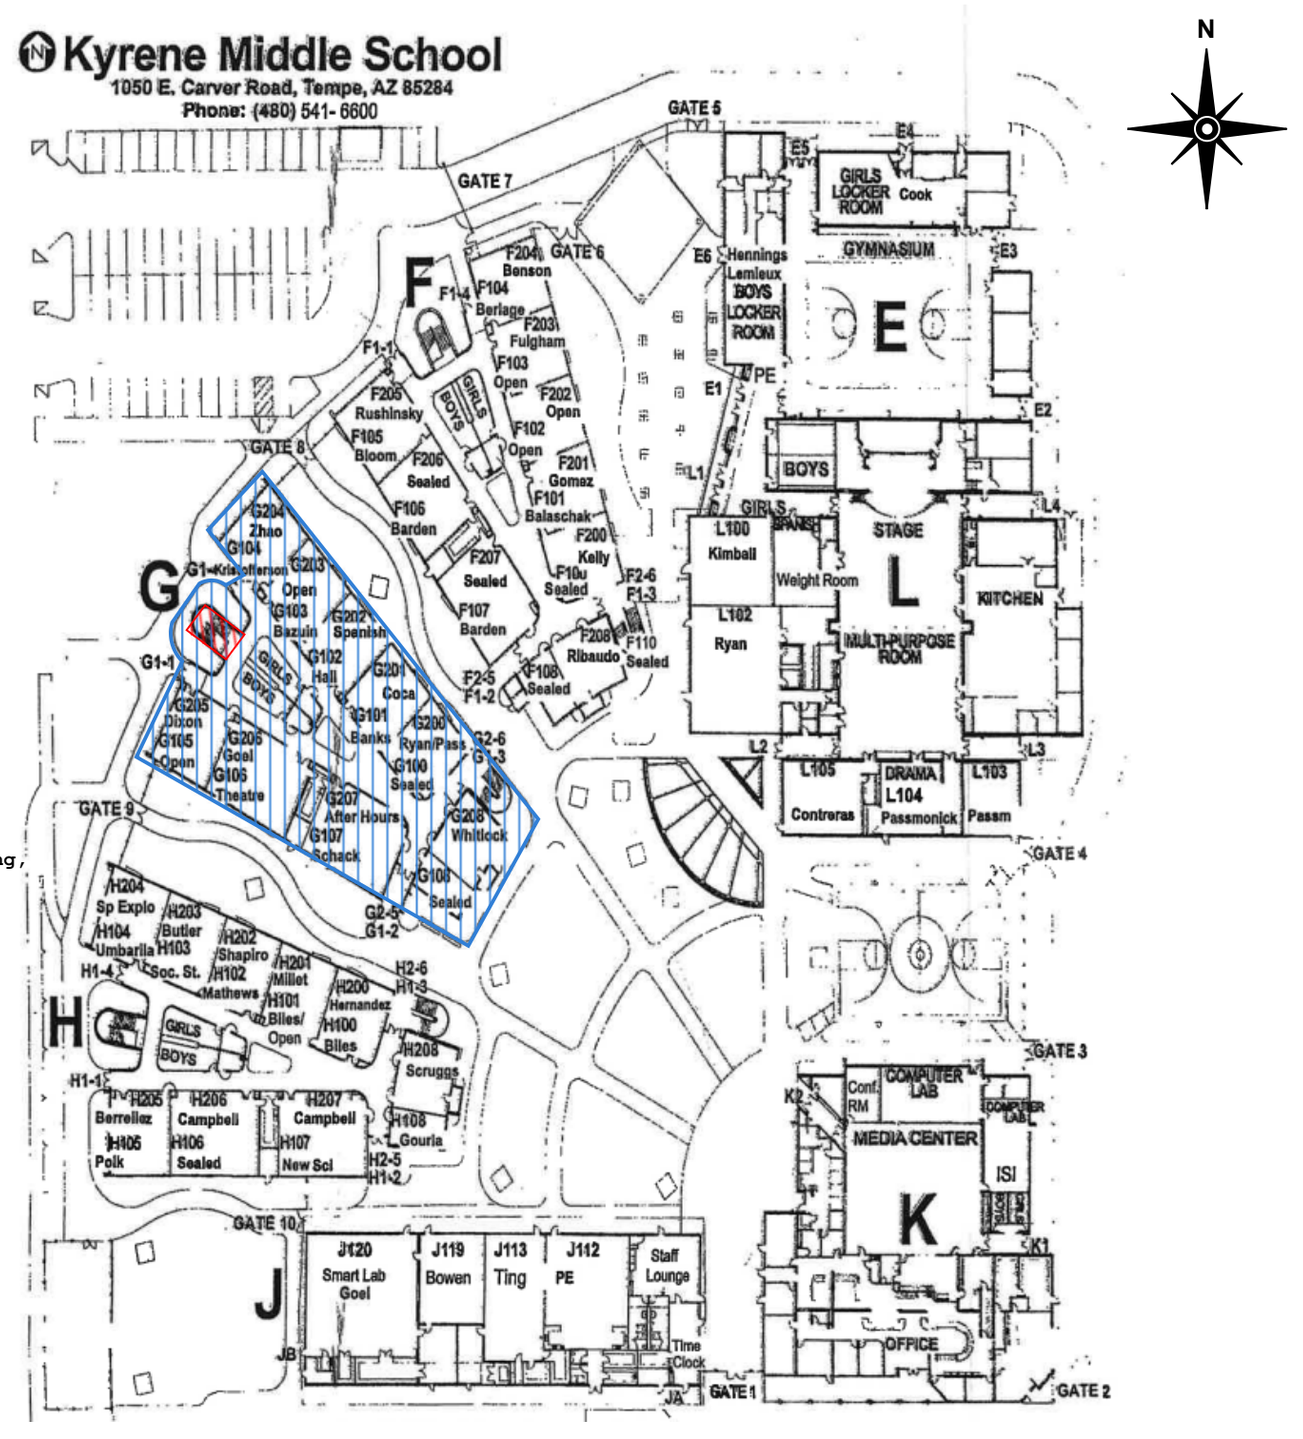

Assumed Asbestos-Containing

Tan 2" x 2" Ceramic Floor Tile, Grout, & Thinset, Green 2" x 2" Ceramic Floor Tile, Blue 2" x 2" Ceramic Floor Tile, Marble Threshold, Fixture Caulking, Knockdown Drywall System, Brown FRP & Mastic, Terrazo Mop Sink, & Glass Block Mortar


Assumed Asbestos-Containing Black Stair Tread & Mastic

Assumed Asbestos-Containing Material Location Map (2)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.57

Building G

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

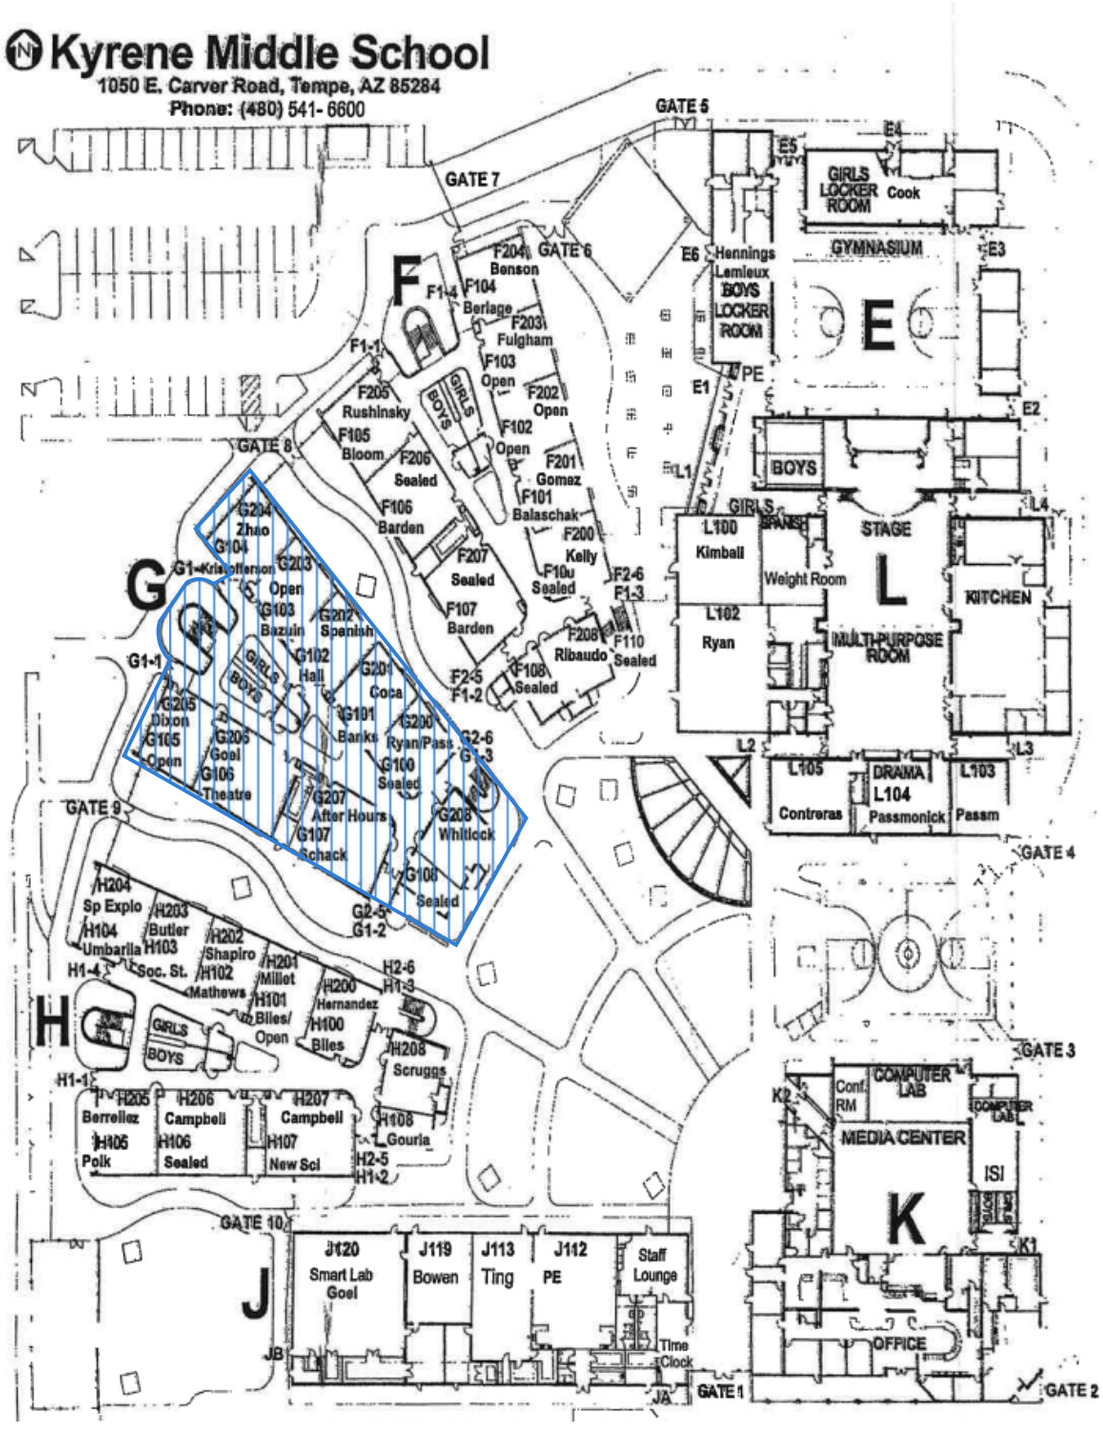

Assumed Asbestos-Containing

Skylight Insulation Panel,
Silver Flex Duct Wrap,
Silver Box Duct Wrap,
Gray Duct Mastic,
Unfinished Drywall System,
Black Foam Pipe Insulation,
White Pipe Wrap & Mastic


*Above the Ceiling

Assumed Asbestos-Containing Material Location Map (3)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.57

Building G

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

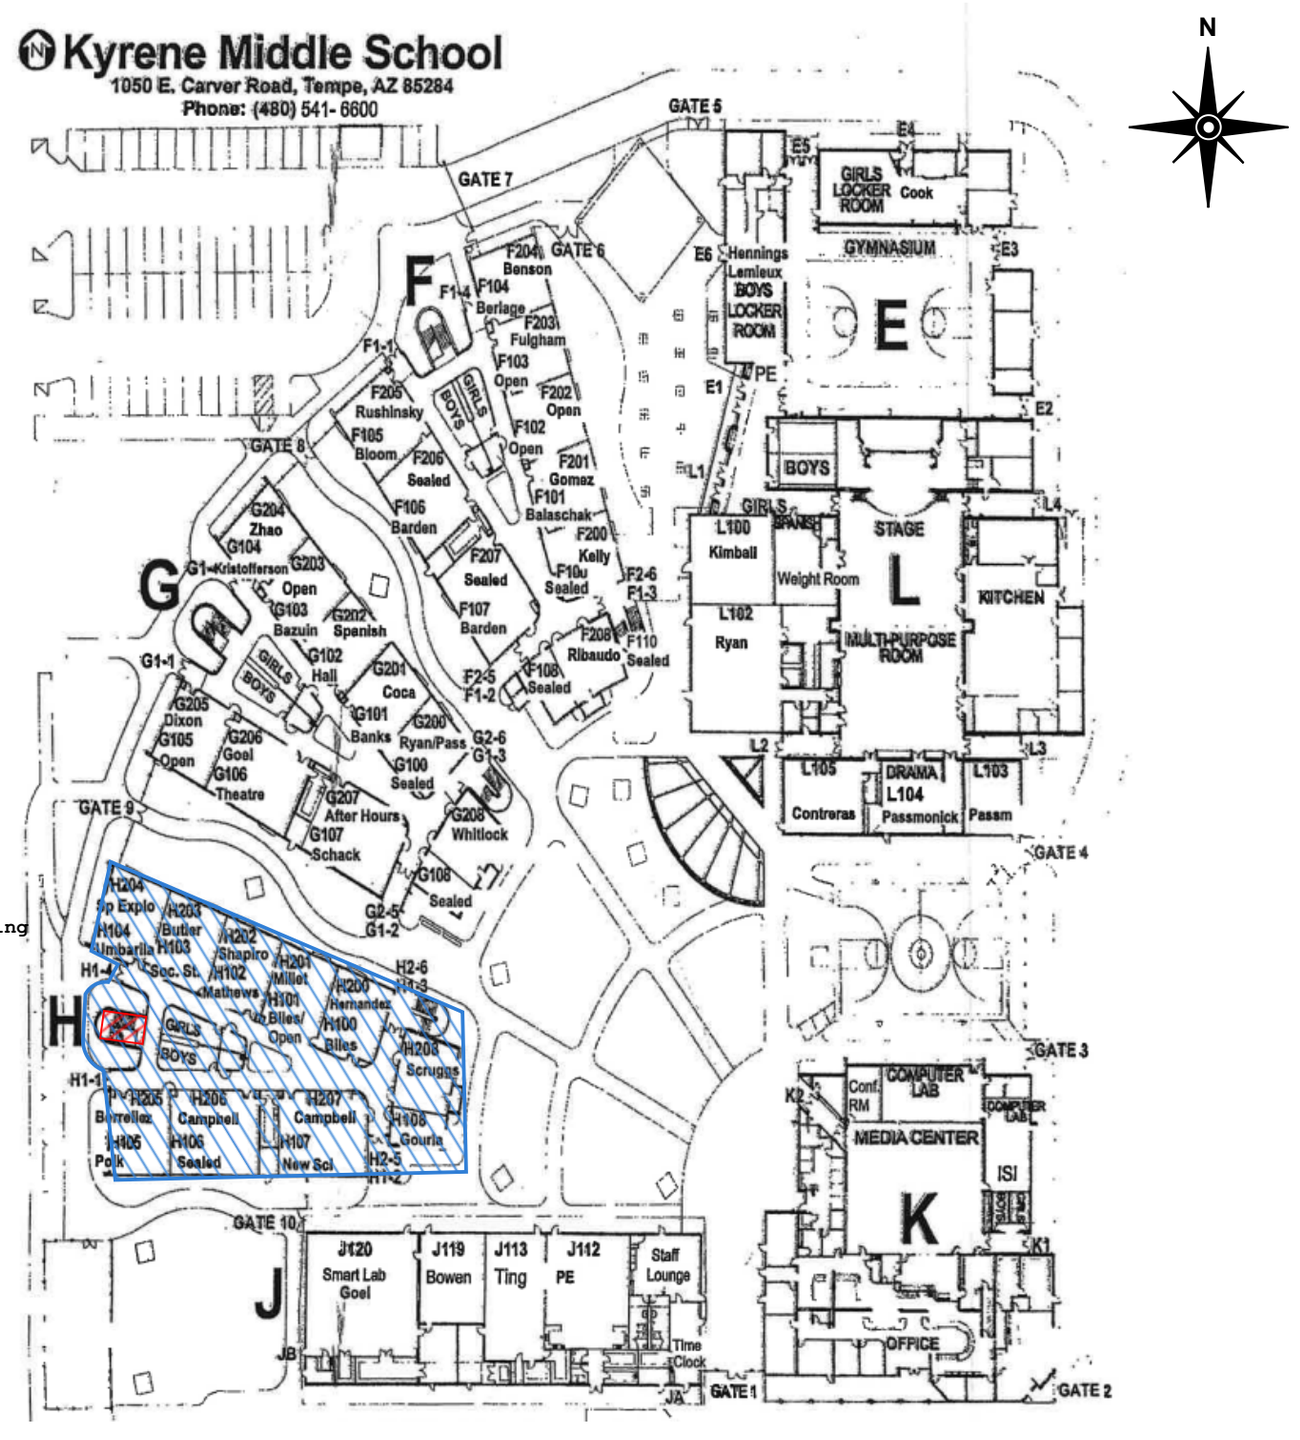


Assumed Asbestos-Containing

Tan 2" x 2" Ceramic Floor Tile, Grout, & Thinset, Green 2" x 2" Ceramic Floor Tile, Blue 2" x 2" Ceramic Floor Tile, Knockdown Drywall System, White Sink Coating, Glass Block Mortar, Marble Threshold,& Fixture Caulking

Assumed Asbestos-Containing
Black Stair Tread & Mastic

Assumed Asbestos-Containing Material Location Map (1) — Project No. AZ1418.57
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284 — Building H

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

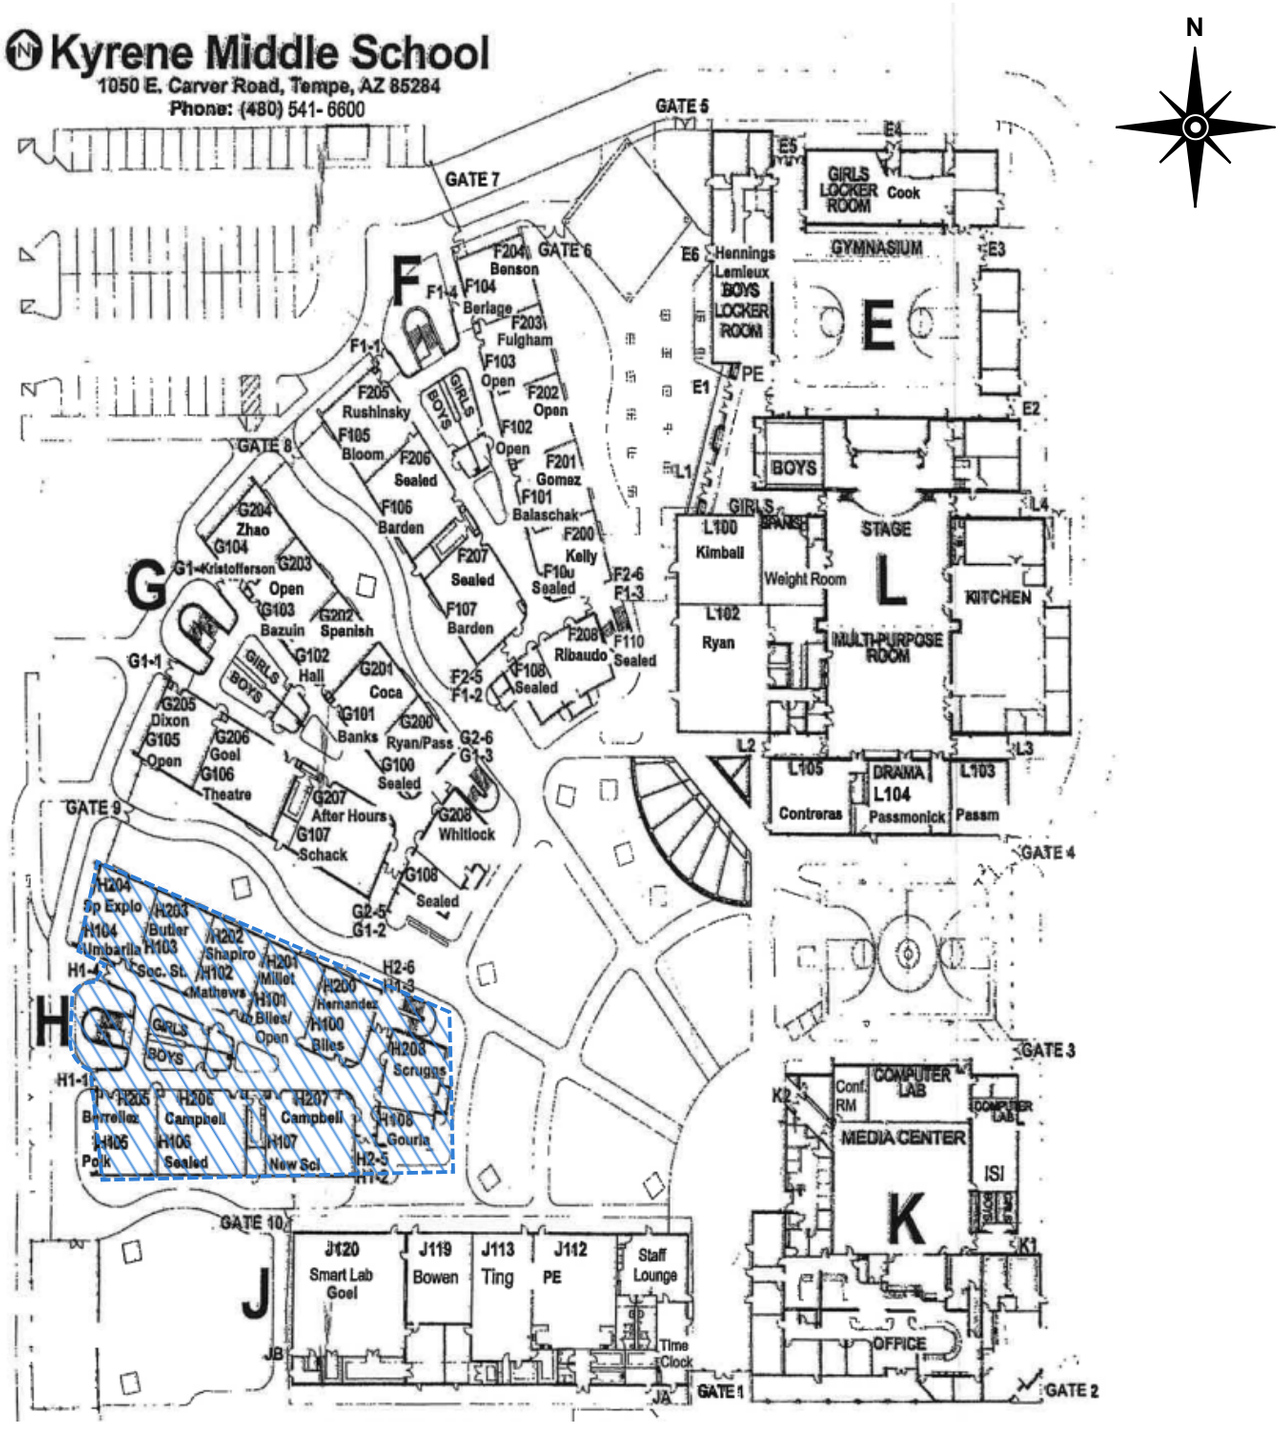

Assumed Asbestos-Containing

White w/Black 12" x 12" VCT & Mastic, Interior Caulking, Gray Sink Coating, Divider Wall, Brick & Mortar, Tacboard, Tan 4" x 4" Ceramic Wall Tile, Grout, & Thinset, Green 4" x 4" Ceramic Wall Tile, Blue 4" x 4" Ceramic Wall Tile, Black Cove Base & Mastic, & Black 20" x 20" Floor Tile & Mastic


Assumed Asbestos-Containing Exterior Caulking

Assumed Asbestos-Containing Material Location Map (2)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.57

Building H

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

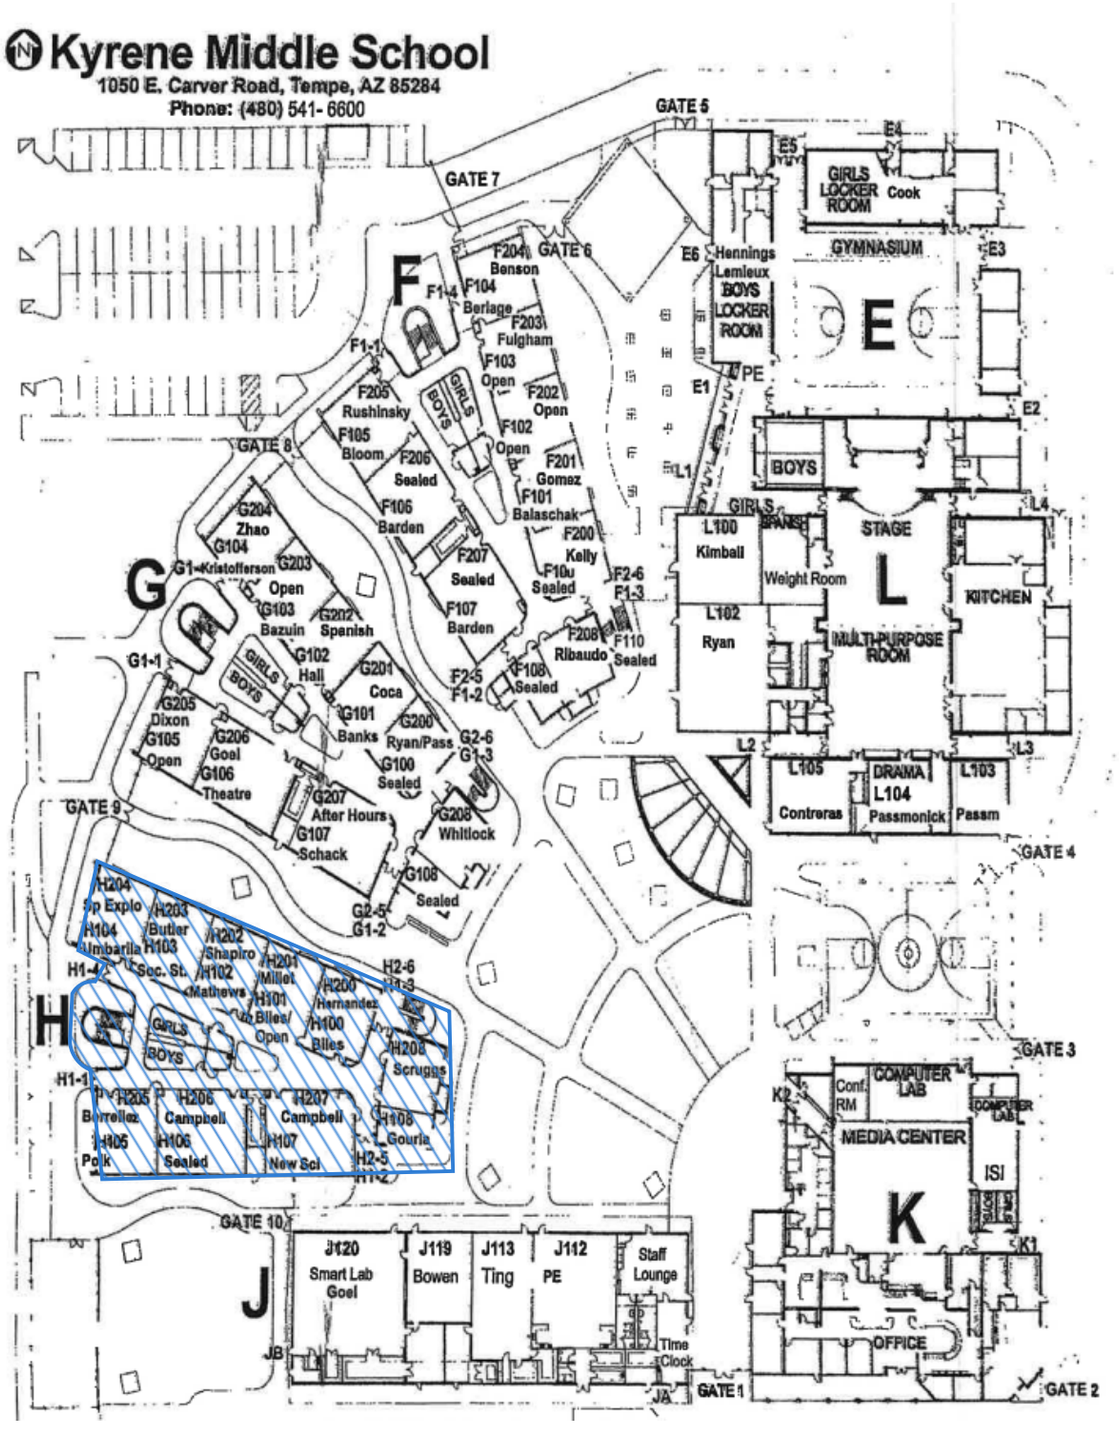


Assumed Asbestos-Containing

Skylight Insulation Panel,
Silver Flex Duct Wrap,
Silver Box Duct Wrap,
Gray Duct Mastic,
Unfinished Drywall System,
Black Foam Pipe Insulation,
& White Pipe Wrap & Mastic

* Above the Ceiling

Assumed Asbestos-Containing Material Location Map (3) — Project No. AZ1418.57
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284 — Building H

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

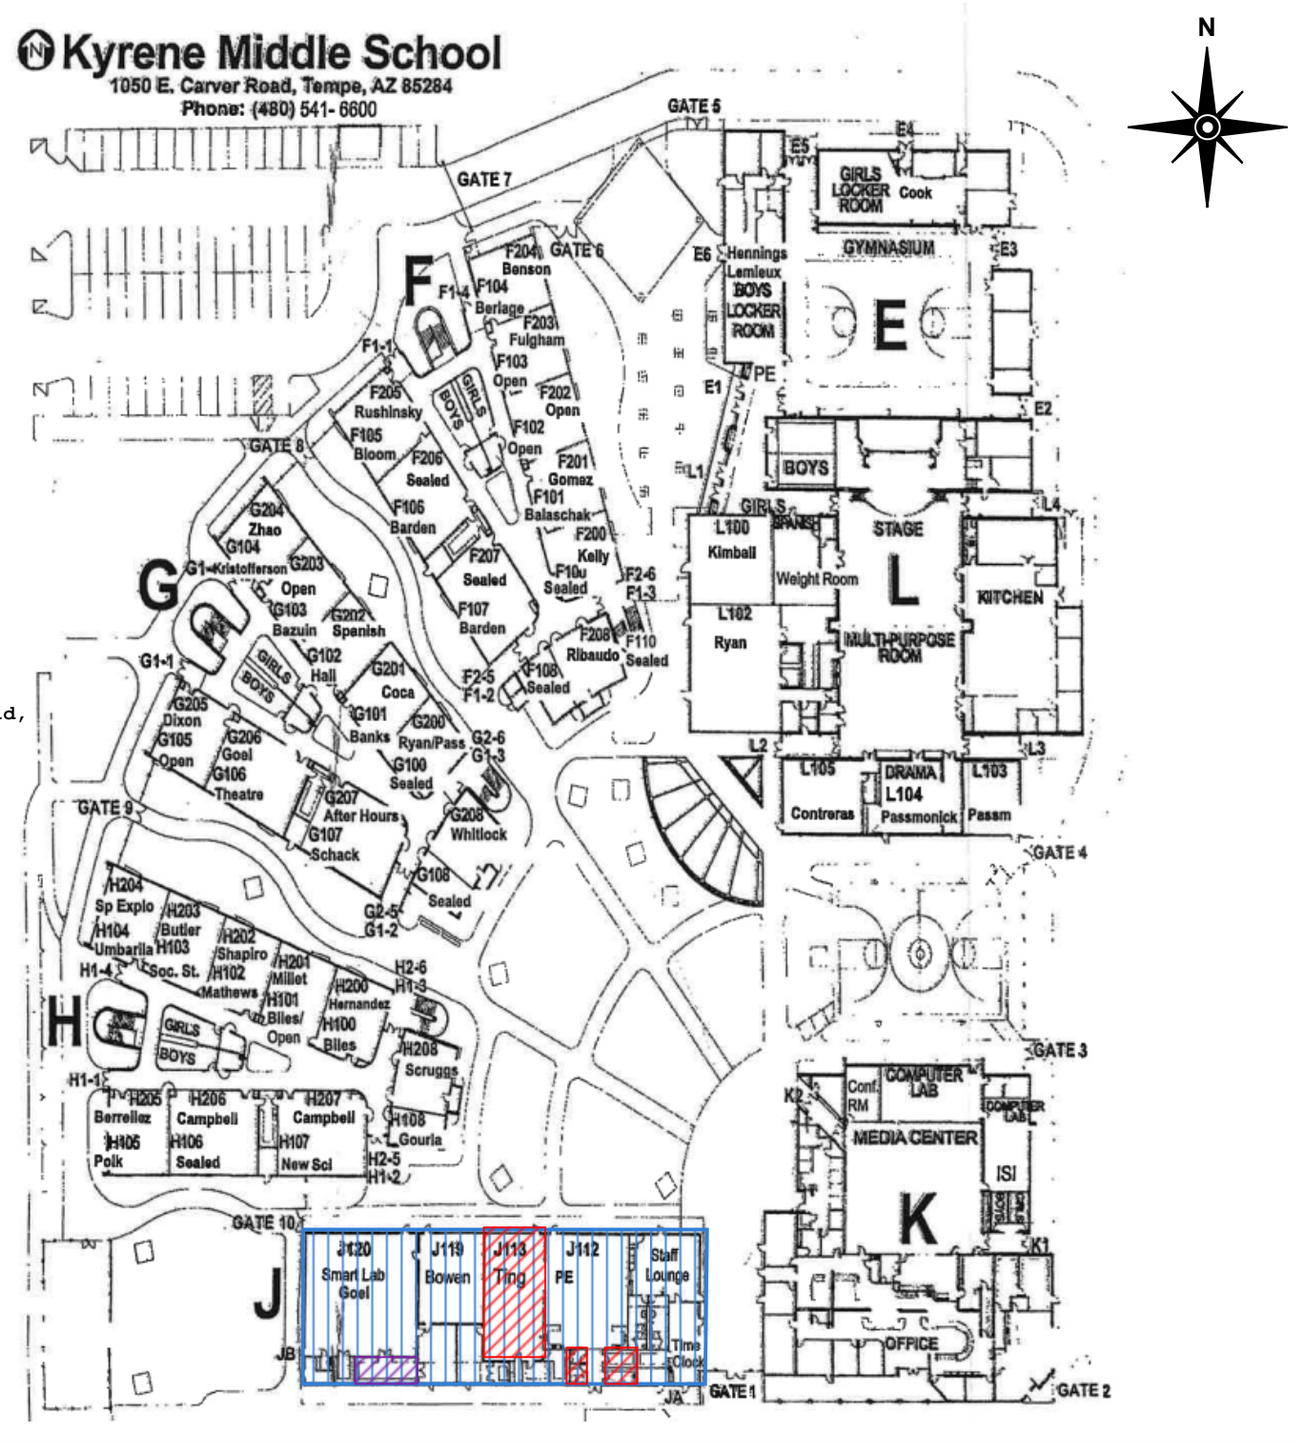

Assumed Asbestos-Containing

Tan 2" x 2" Ceramic Floor Tile, Grout, & Thinset, Green 2" x 2" Ceramic Floor Tile, Blue 2" x 2" Ceramic Floor Tile, Fixture Caulking, Marble Threshold, Tacboard, & Brick & Mortar

Assumed Asbestos-Containing
Blue Cove Base & Mastic


Assumed Asbestos-Containing
Knockdown Drywall System

Assumed Asbestos-Containing Material Location Map (1)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.57

Building J

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

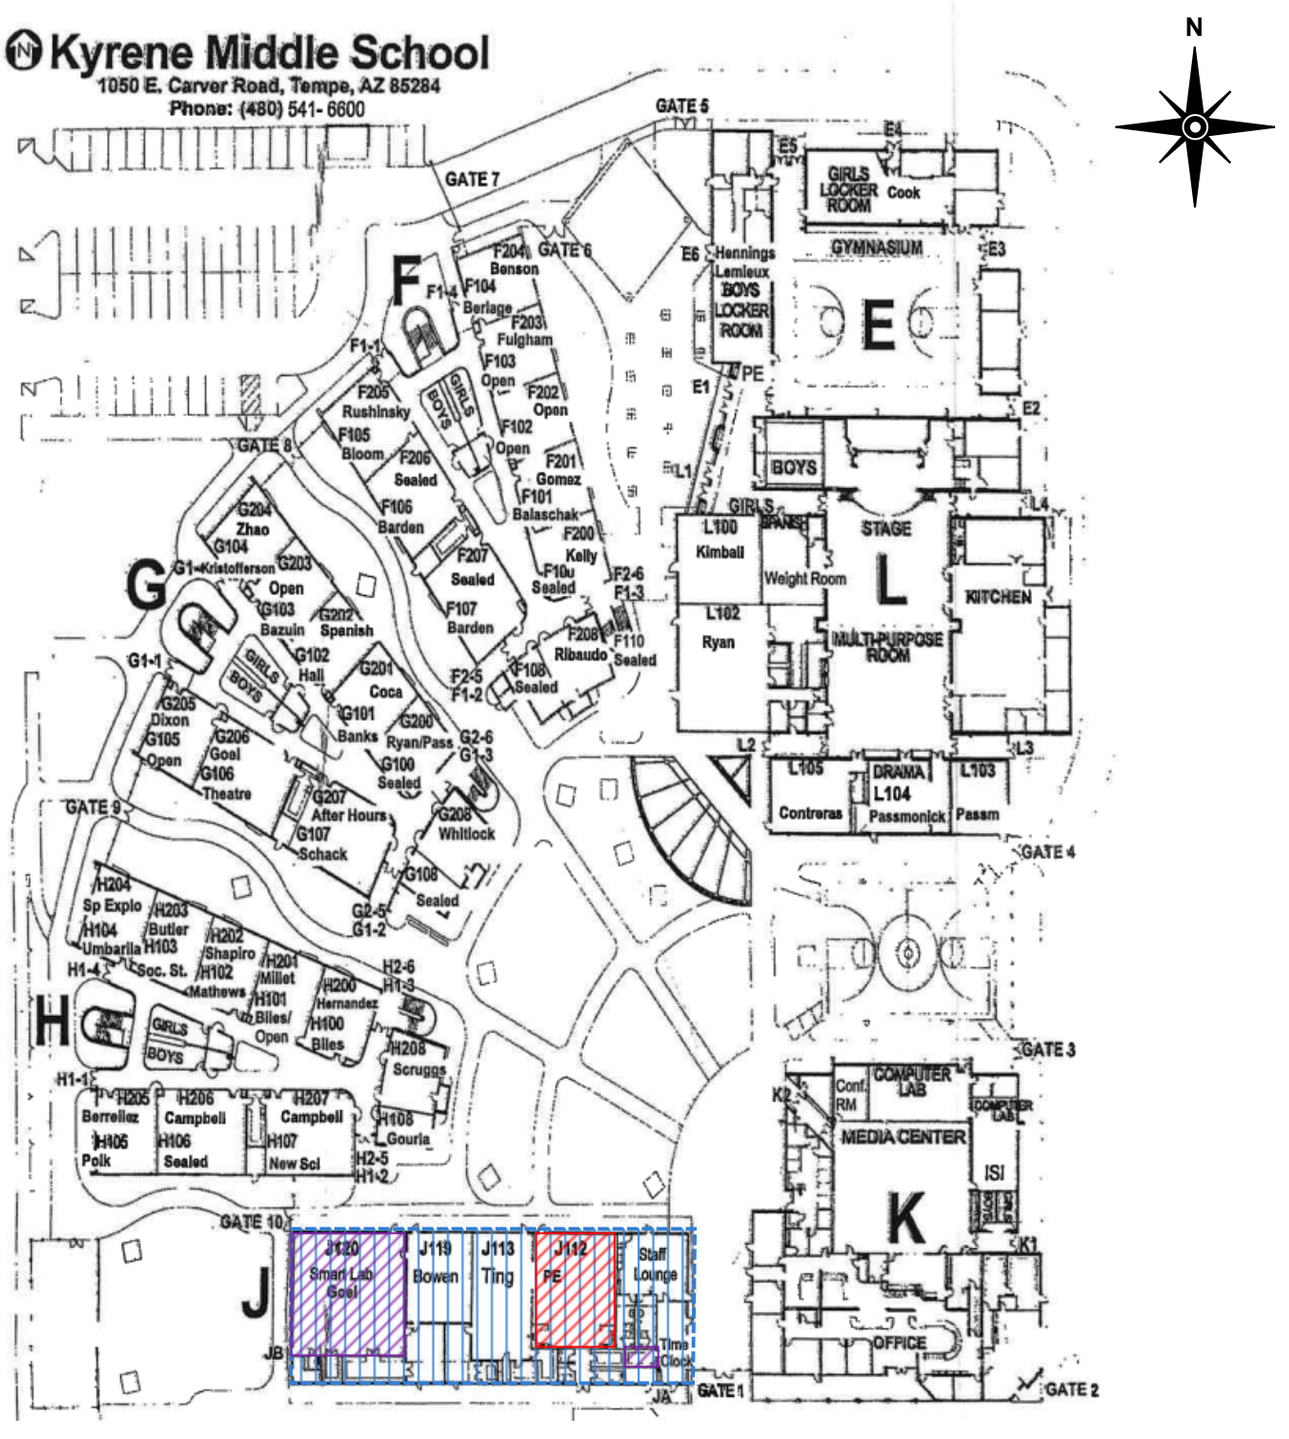

Assumed Asbestos-Containing
Exterior Caulking

Assumed Asbestos-Containing

FRP & Mastic, Gray Sink Coating,
Interior Caulking,
Tan 4" x 4" Ceramic Wall Tile,
Grout, & Thinset, Green 4" x 4"
Ceramic Wall Tile, & Blue 4" x 4"
Ceramic Wall Tile

Assumed Asbestos-Containing
Gray 12" x 12" VCT & Mastic


Assumed Asbestos-Containing
Tan Multicolored 12" x 12"
VCT & Mastic

Assumed Asbestos-Containing Material Location Map (2)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.57

Building J

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

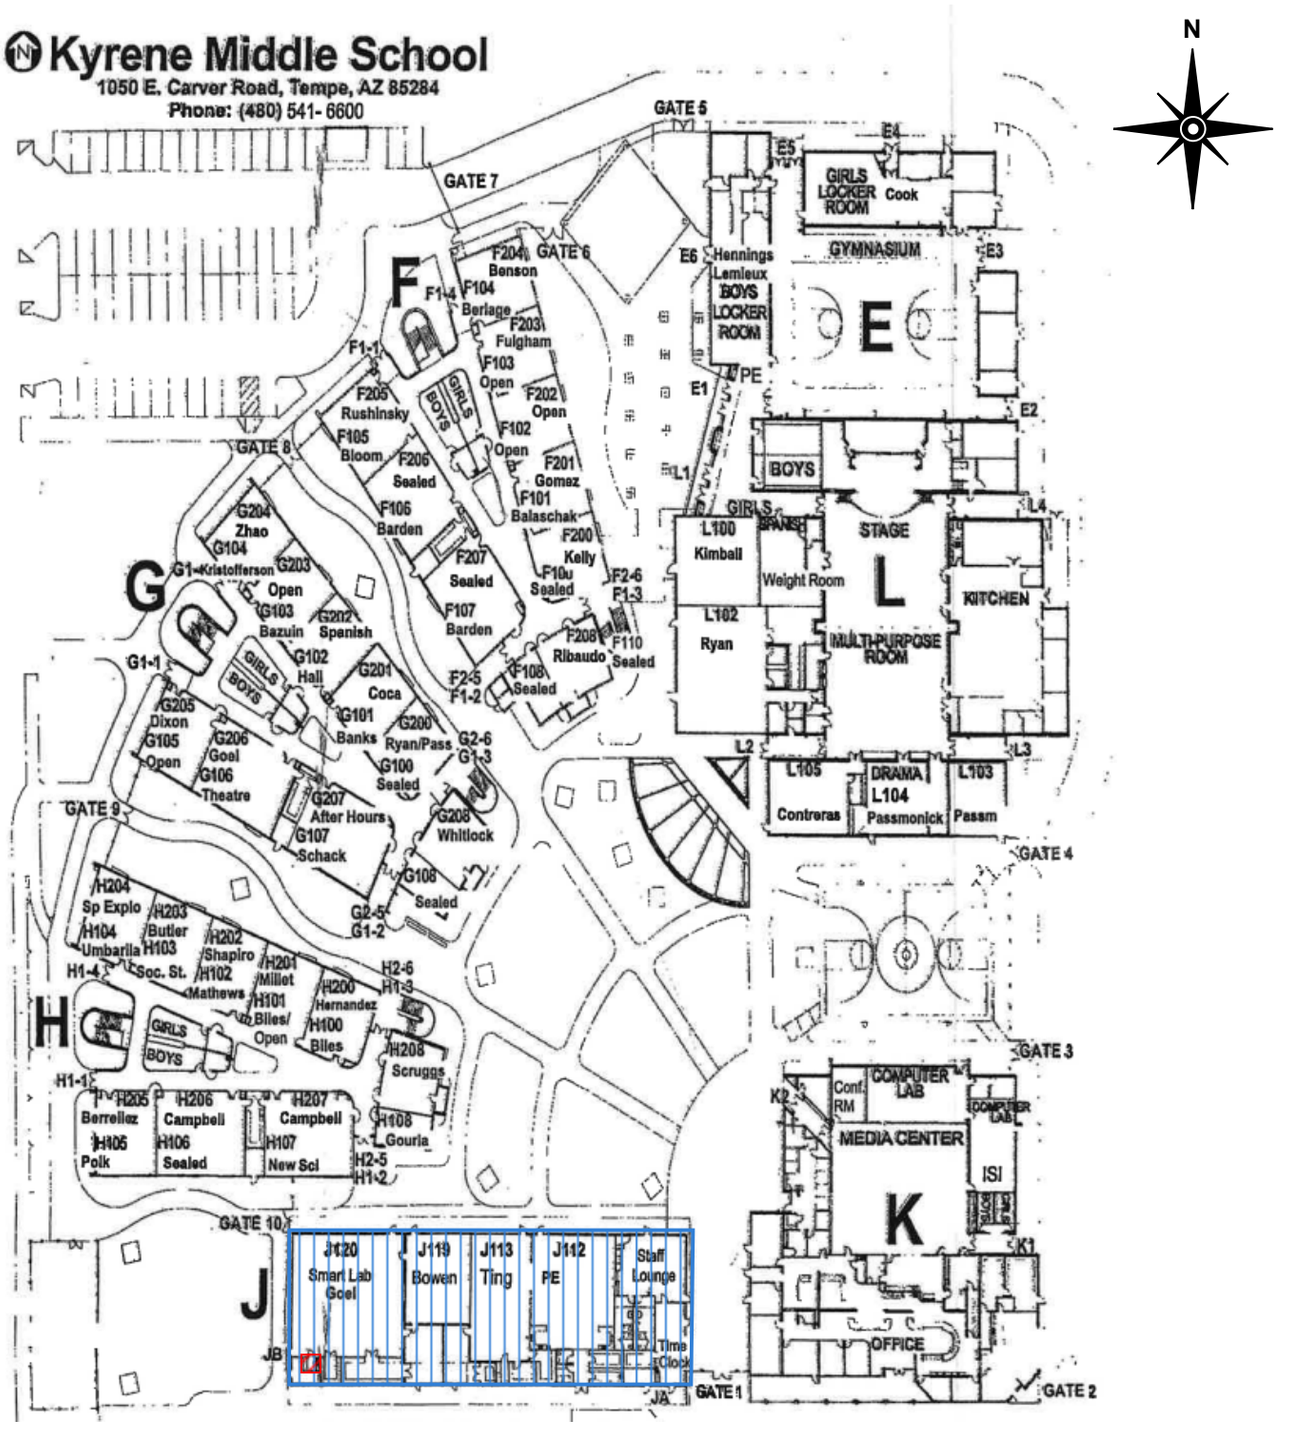

Assumed Asbestos-Containing


Skylight Insulation Panel,
Large Silver Flex Duct Wrap,
Silver Box Duct Wrap,
Gray Duct Mastic,
Unfinished Drywall System,
Black Foam Pipe Insulation,
White Pipe Wrap & Mastic, &
Residual 12" x 12" Ceiling
Tile Mastic

* Above the Ceiling

Assumed Asbestos-Containing
Gray Floor Coating &
White 6" x 6" Ceramic Wall Tile,
Grout, & Mastic

Assumed Asbestos-Containing Material Location Map (3) — Project No. AZ1418.57
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284 — Building J

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

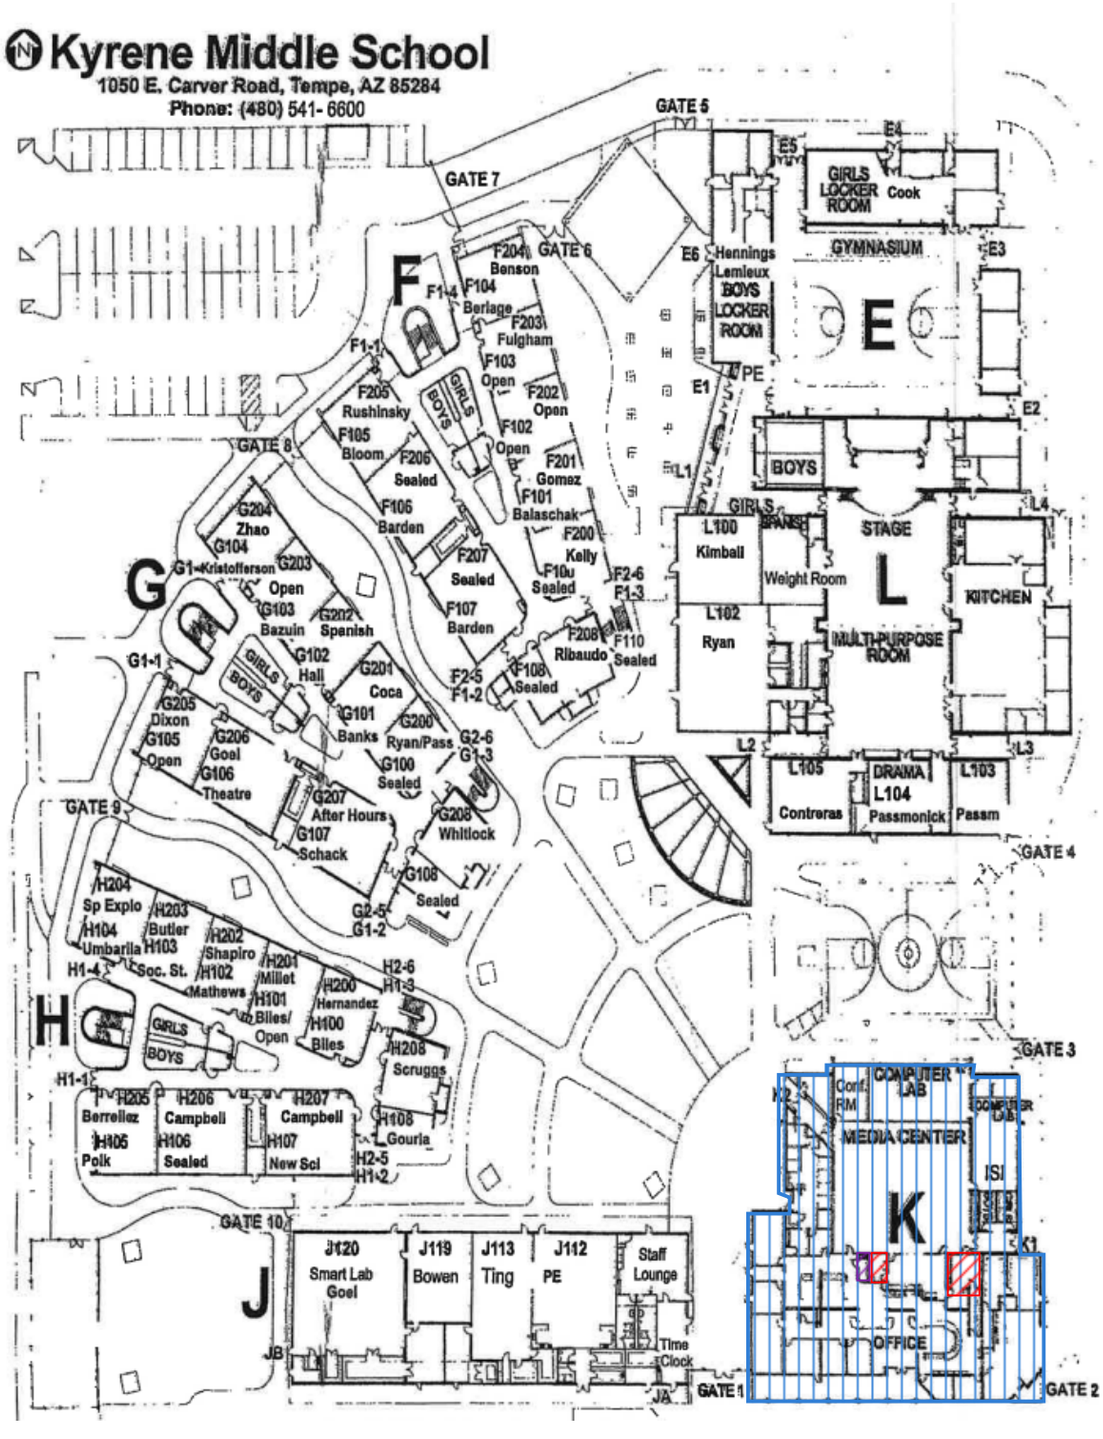

Assumed Asbestos-Containing

Tan 2" x 2" Ceramic Floor Tile, Grout, & Thinset, Green 2" x 2" Ceramic Floor Tile, Blue 2" x 2" Ceramic Floor Tile, Marble Threshold, Wallpaper, Brick & Mortar, White w/Black 12" x 12" VCT & Mortar, & Interior Caulking

Assumed Asbestos-Containing Gray Carpet Square & Mastic


Assumed Asbestos-Containing Beige Multicolored 12" x 12" VCT & Mastic

Assumed Asbestos-Containing Material Location Map (1)
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284

Project No. AZ1418.57

Building K

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

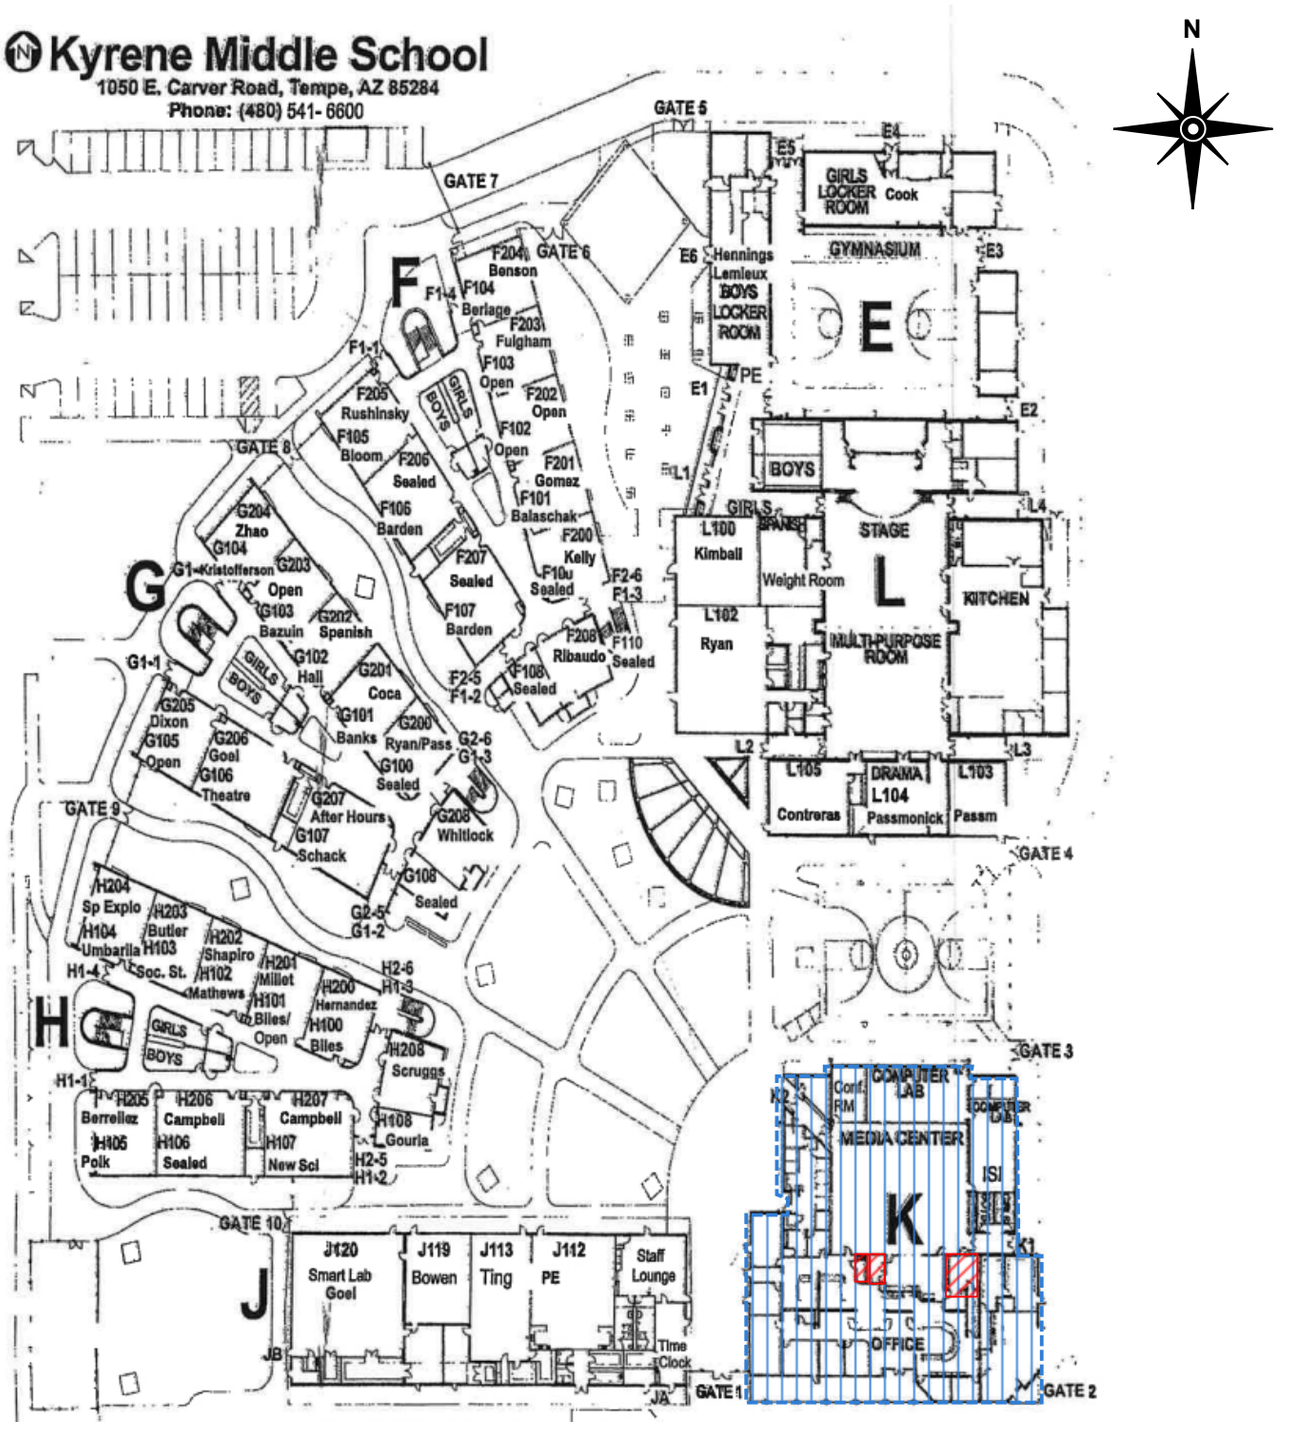

Assumed Asbestos-Containing
Exterior Caulking


Assumed Asbestos-Containing

Black Carpet Square & Mastic,
Tan 4" x 4" Ceramic Floor Tile,
Grout, & Thinset,
Gray Sink Coating,
FRP & Mastic, &
Terrazo Mop Sink

Assumed Asbestos-Containing
Dark Gray Cove Base & Mastic

Assumed Asbestos-Containing Material Location Map (2) — Project No. AZ1418.57
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284 — Building K

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

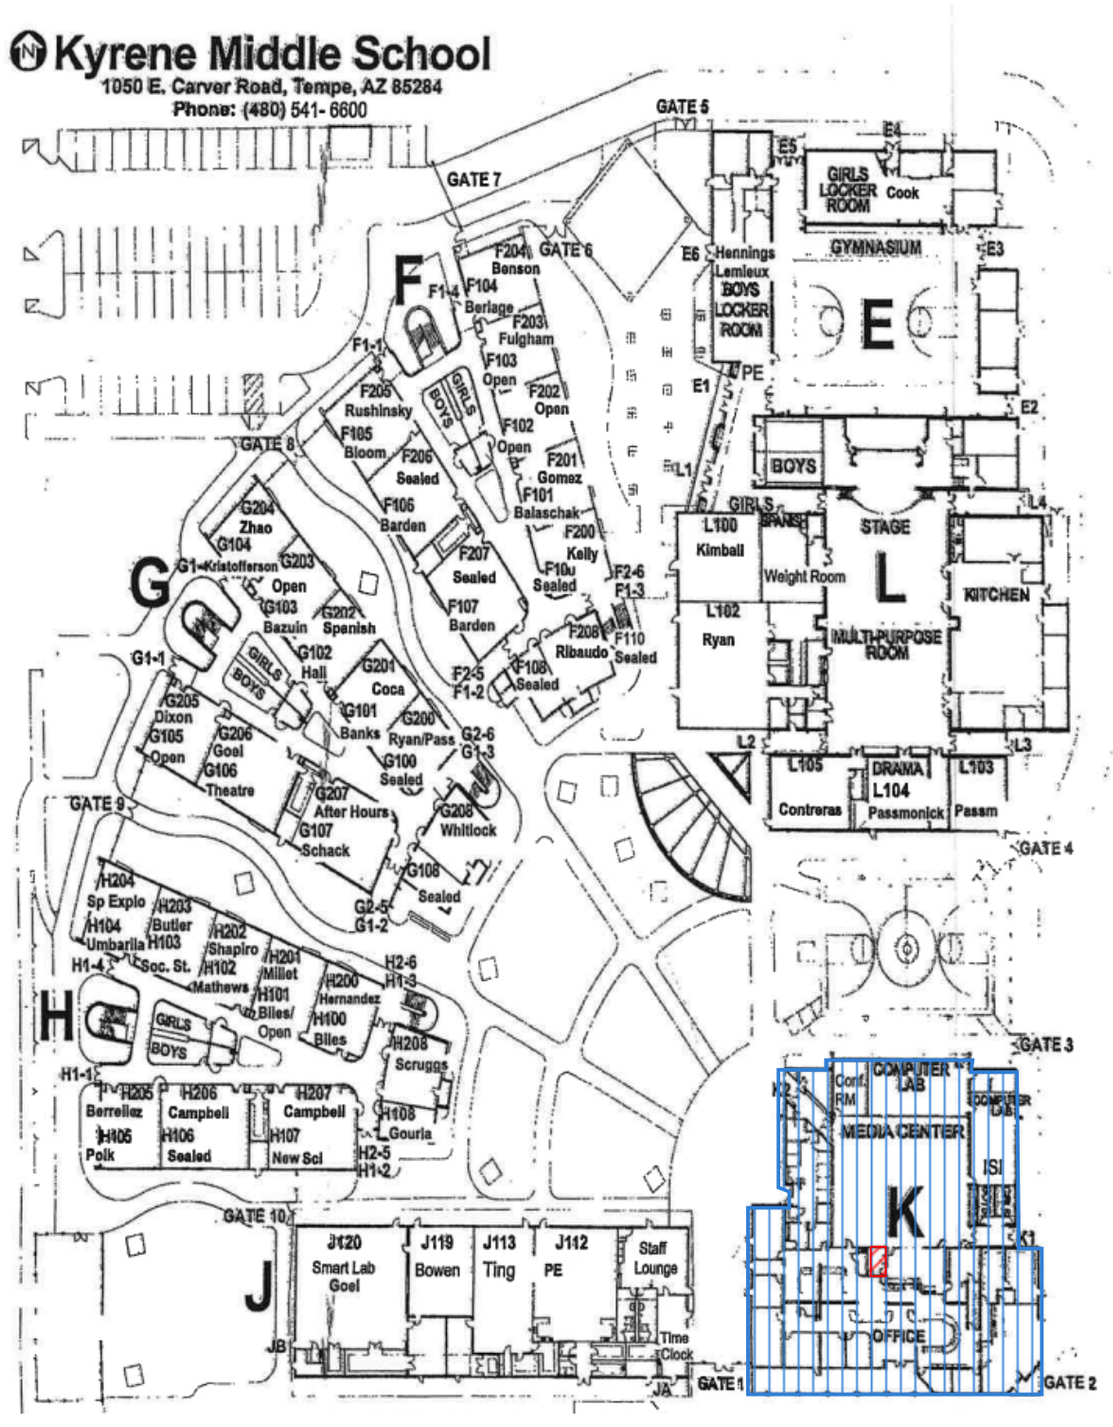

Assumed Asbestos-Containing
Unfinished Drywall System,
Silver Flex Duct Wrap,
Silver Box Duct Wrap,
Black Pipe Foam Insulation,
Pipe Wrap & Mastic,
Gray Duct Mastic,
& Skylight Insulation Panel

* Above the Ceiling

Assumed Asbestos-Containing
Knockdown Drywall System

Assumed Asbestos-Containing Material Location Map (3) — Project No. AZ1418.57
Kyrene Middle School
1050 East Carver Road, Tempe, Arizona 85284 — Building K

Dominion Environmental Consultants, Inc.
20045 North 19th Avenue - Building 7 - Phoenix, Arizona 85027 - (623) 516-1415

SECTION 11

♦

INSPECTOR ACCREDITATIONS

THE ASBESTOS INSTITUTE

Certifies that

Krista Wahnefried

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

August 19, 2017

and successfully completed and passed the competency exam.

4646-230-081917

Date of Examination:
19-Aug-2017

Date of Expiration:
19-Aug-2018

William T. Cavness
Director

Approved Instructor

THE ASBESTOS INSTITUTE
20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

This training meets all requirements for asbestos certification under Toxic Substance Control Act Title II.

THE ASBESTOS INSTITUTE

Certifies that

Tracey Carpenter

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

August 29, 2024

and successfully completed and passed the competency exam.

Certificate:
ON-188748-14588-082924

Date of Examination:
29-Aug-2024

Date of Expiration:
29-Aug-2025

William T. Cavness
Director

Approved Instructor

THE ASBESTOS INSTITUTE
20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

The person receiving this certificate has completed the requisite training for asbestos accreditation under TSCA Title II.

THE ASBESTOS INSTITUTE

Certifies that

Nicholas Marcos

has attended and received instruction in the EPA approved course

AHERA Building Inspector Refresher

on

March 13, 2025

and successfully completed and passed the competency exam.

Certificate:
ON-188748-8873-031325

Date of Examination:
13-Mar-2025
Date of Expiration:
13-Mar-2026

A. Zwanenburg
Director

Approved Instructor

THE ASBESTOS INSTITUTE
20033 N. 19th Ave, Building 6, Phoenix, AZ 85027
602-864-6564 – www.theasbestosinstitute.com

FL Course # CRS228

The person receiving this certificate has completed the requisite training for asbestos accreditation under TSCA Title II.

SECTION 12

♦

LABORATORY ACCREDITATIONS

United States Department of Commerce
National Institute of Standards and Technology

Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 500097-0

Aerobiology Laboratory Associates, Inc., Phoenix, AZ

Phoenix, AZ

is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:

Asbestos Fiber Analysis

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).

2020-01-01 through 2020-12-31

Effective Dates

For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500097-0

Aerobiology Laboratory Associates, Inc., Phoenix, AZ

Phoenix, AZ

is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:

Asbestos Fiber Analysis

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).

2022-01-01 through 2022-12-31

Effective Dates

For the National Voluntary Laboratory Accreditation Program

National Voluntary
Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

Aerobiology Laboratory Associates, Inc., Phoenix, AZ
2228 West Northern Ave, Suite B110
Phoenix, AZ 85021
Ms. Elvira Teague
Phone: 602-441-3700
Email: elle@aerobiology.net
http://www.aerobiology.net

ASBESTOS FIBER ANALYSIS **NVLAP LAB CODE 500097-0**

Bulk Asbestos Analysis

Code	***Description***
18/A01	EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples
18/A03	EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials

For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500031-0

Eurofins EMLab P&K

Phoenix, AZ

is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:

Asbestos Fiber Analysis

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).

2024-01-01 through 2024-12-31

Effective Dates

For the National Voluntary Laboratory Accreditation Program

National Voluntary Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

Eurofins EMLab P&K
1501 W. Knudsen Dr.
Phoenix, AZ 85027-1307
Claudia Palermo
Phone: 856-334-1001
Email: claudia.palermo@et.eurofinsus.com
https://www.eurofinsus.com/environment-testing/built-environment/

ASBESTOS FIBER ANALYSIS — NVLAP LAB CODE 500031-0

Bulk Asbestos Analysis

Code	*Description*
18/A01	EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples
18/A03	EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials

For the National Voluntary Laboratory Accreditation Program

United States Department of Commerce
National Institute of Standards and Technology

Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 500031-0

Eurofins EMLab P&K

Phoenix, AZ

is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:

Asbestos Fiber Analysis

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique on ISO/IEC 17025).

2025-01-01 through 2025-12-31

Effective Dates

For the National Voluntary Laboratory Accreditation Program

National Voluntary Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

Eurofins EMLab P&K
1501 W. Knudsen Dr.
Phoenix, AZ 85027-1307
Joshua Snyder
Phone: 800-651-4802
Email: joshua.snyder@et.eurofinsus.com
https://www.eurofinsus.com/environment-testing/built-environment/

ASBESTOS FIBER ANALYSIS — NVLAP LAB CODE 500031-0

Bulk Asbestos Analysis

Code	*Description*
18/A01	EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples
18/A03	EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials

For the National Voluntary Laboratory Accreditation Program