ADDENDUM B, 10/20/2025

RE: **MURRIETA VALLEY UNIFIED SCHOOL DISTRICT**
POOL MODERNIZATION
DSA File Number: 33-32
DSA Application Number: 04-123133
Studio W Project Number: 23071

From: Studio W Architects
424 32nd Street, Suite D&E
Newport Beach, Ca 92663

To: Prospective Bidders

This Addendum forms a part of the Contract Documents and modifies the original bidding documents dated 9/17/25 as noted below. Acknowledge receipt of the Addendum in the space provided on the Bid Form. Failure to do so may subject Bidder to disqualification.

The following clarifications shall be made part of the Bid Documents and shall be taken into consideration when submitting bids.

1. Please provide existing chemical system storage capacities as quantities are not provided on plans or specifications for fill at owner turnover.
   Response by ADG: Exact tank sizes are unknown. Contractor to field verify. Assume sodium hypochlorite tank of 500-1000 gallons, acid tank 350 gallons, and CO2 600-7050 pounds.

2. Specification 1311062.2K for the water polo anchor notes KDI 28102. A 4-inch deep wedge anchor is standard for grab and handrails. Please confirm correct specification for the water polo goal anchors.
   Response by ADG: Contactor to use KDI 38201-TC- 6-inch deep anchor or approved equal for water polo goal anchors.

3. Specification 1311062.1.A notes to include collector tube. Detail 2 sheet CP6 only notes new valve and that existing tube is cast into the existing pool structure. Please confirm only new valve is required.
   Response by ADG: Contractor to replace hydrostatic relief valve and collector tube as required by specification 1311062.1A.

4. Please clarify assumed thickness of the existing pool deck.
   Response by ADG: Contractor to assume the existing pool deck conditions to be a minimum 6-inch thick deck, 14-inches at deck drain, and approximately 9-inches at the top of the pool wall.


5. Please clarify if contractor is responsible for the removal and storage of pool deck equipment to be reinstalled or if owner is performing this prior to commencement of work.
   Response by Studio W: Demolition of snack bar to be included. Equipment will be cleared by owner before contract work commences.

6. Plan sheet DP-1 Note 8 states to replace damaged or dented metal goods with new. Please clarify how many bidders are to assume to be replaced or will this be addressed via change order?
   Response by Architect: Grab bars are intended to remain with new inserts if damaged. Handrails are to be replaced. Refer to question 11.


7. Plan sheet DP-1 Note 9 states to repair cracks. Please clarify linear footage of crack to be carried in pricing as this condition is unknown until plaster is removed.
   Response by ADG: Contractor to provide allowance for 50 linear feet of crack repair. Provide schedule of values for a per linear foot of crack repair.

8. Plan sheet DP-1 Note 9 states to repair rust spots. Please clarify the square footage of rust repair to be carried in pricing as this condition is unknown until plaster is removed.
   Response by ADG: Contractor to provide allowance in base bid for 100 square feet of rust spot repair. Provide schedule of values for a per square foot of crack repair.

9. Plan sheet DP-1 Note 22 states to extend top stair tread 2-inches. Plan sheet CP-4 detail 7 does not show this extension meeting 14-inch width. Please provide revised plan details.
   Response by ADG: See revised detail:

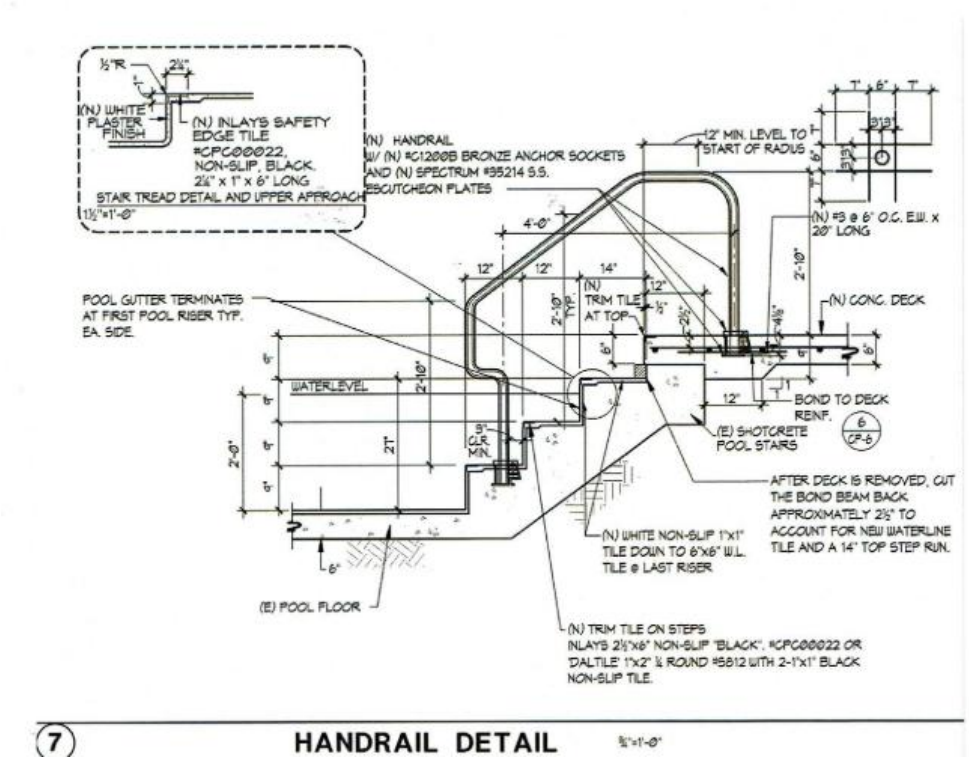

10. Plan sheet CP4 detail 7 notes new handrail but detail has incorrect dimensions for new steps. Please provide revised details to obtain correct handrail dimensions if custom shape.
    Response by ADG: See revised detail:

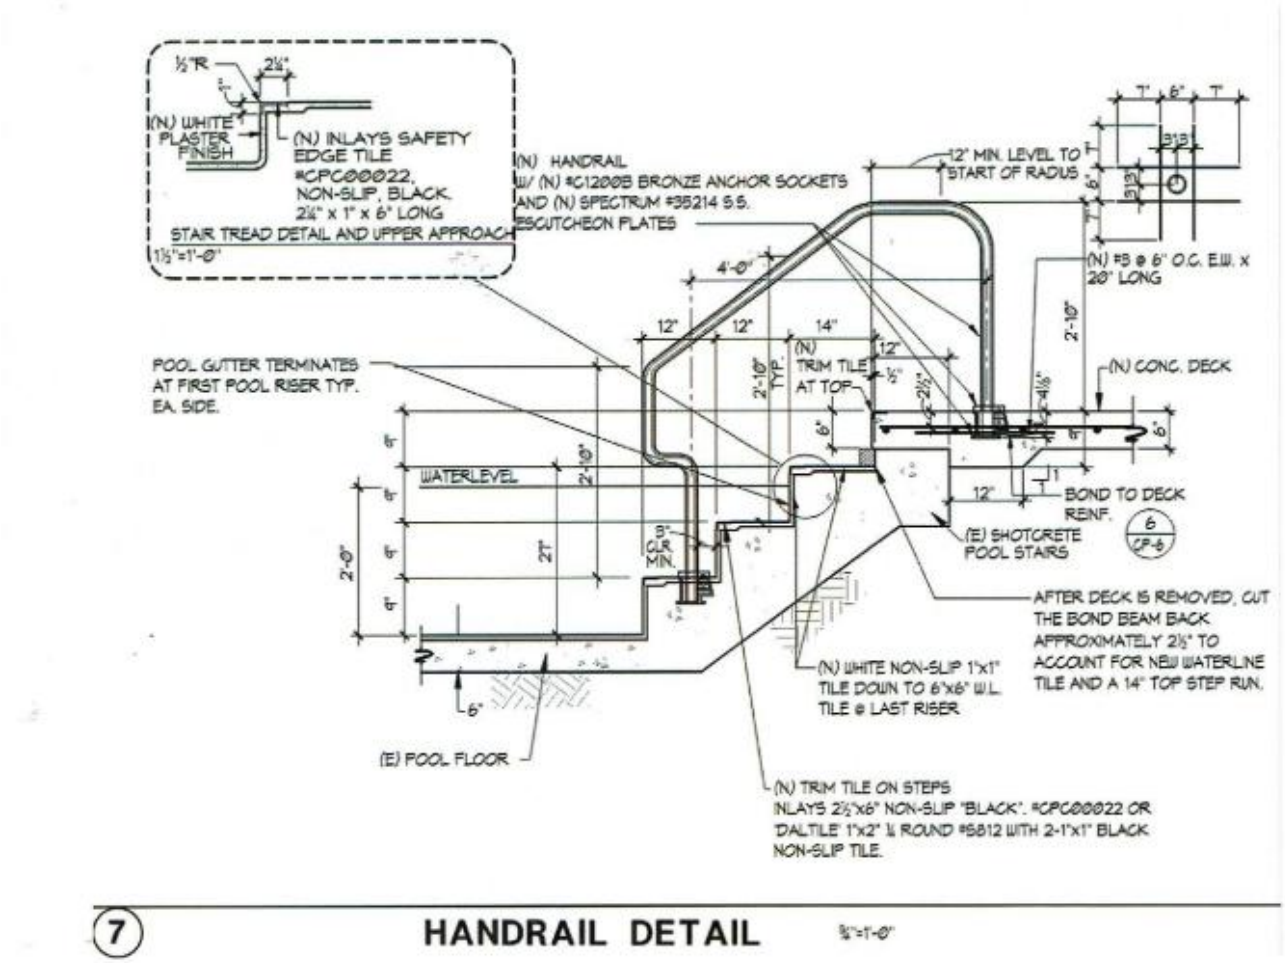

11. Plan sheet CP4 detail 7 notes new handrail and specification 1311062.2F notes handrails existing cleaned and polished. Please clarify with quantity, manufacturer and model number for new handrails.
    Response by ADG: Contractor to provide three (3) new handrails. Contractor to field verify quantity. Provide KDI Paragon #34202 custom 3 bend handrail or approved equal. Shop drawing submittal required.

12. Plan sheet CP4 detail 7 notes anchors #C1200B bronze anchor sockets, specification 1311062.2.1 notes KDI Paragon #28102 for sockets with no known equal. Please clarify manufacturer and model number of anchor socket.
    Response by ADG: Contractor to provide KDI Paragon #28102 or Permacast #C1200B approved equal.

13. Plan sheet CP4 detail 7 notes anchors Spectrum #35214SS escutcheon plates. Specification 1311062.2.1 notes KDI Paragon #28301 for plates with no known equal. Please clarify manufacturer and model number of escutcheon plates.
    Response by ADG: Spectrum #35214SS escutcheon plates and KDI Paragon #28301 are equals.

14. Plan detail 4 sheet CP7 notes a deck/area drain. Plan sheet DP-2 does not note quantity or location for this detail. Please clarify quantity and installation location.
    Response by ADG: Fourteen (14) locations to receive new drains per detail 4/CP7.

15. Plan sheet DP1 Note 24 states to remove and replace surge tank ladder per detail. Detail 5 sheet CP4 notes ladder existing. Specifications provide no model number for ladder. Please provide revised construction detail and provide manufacturer and model number of ladder to be installed.
Response by ADG: Contractor to provide "Lane International Corporation" polypropylene vault ladder with pull-up handrail. Contractor to provide shop drawings for architect review.

16. Plan sheet DP1 Note 24 states to remove and replace all valving and piping inside surge tank. Plans and specifications provide no detail as to size, type, or quantity of valves to be replaced to obtain pricing. Please clarify.
Response by ADG: Include allowance for assumed 8-inch valves.

17. Specification 1311072.3.F notes for backflow preventor. This location and size of item is not provided on plans. Please clarify if this product is to be provided and location with line size if new.
Response by ADG: Contractor to field verify location and pipe size. Contractor can assume a 2.5-inch fill line.

18. Specification 1311072.3.G notes for make up water control. This location install detail is not provided on plans. Please clarify if this product is to be provided and provide installation detail and location.
Response by ADG: Contractor to field verify location and pipe size. Contractor can assume a 2.5-inch fill line.

19. Plan Detail 5 sheet CP7 notes gutter grate Lawson AQ 12x12. Please confirm to protect existing in-place.
Response by ADG: Contractor to provide new gutter outlet grate as specified.

20. Detail 1 sheet CP8 shows pool signage detail. Specifications do not note new signage to be provided. Please clarify if new signage is to be provided.
Response by ADG: Contractor to provide new signage.

21. Is there an Engineer's Estimate available for this project?
Response by Architect: There is no Engineer's estimate on this project.

22. Are there any prequalification requirements? GC? MEP Sub?
Response by Architect: Contractor to have 5 years of pool construction experience. Sub-contractors to have 3 years of pool construction experience.
Item #1: In addition to the requirements of Detail 6 on CP-7, please provide the following:

Product or Service	***SKU***	***Description***
Ambassador Anchor Jig Plate	F-XRJPA	Anchor Jig Plate-Pro XR & Ambassador W-Bond Lug
Ambassador Anchor Inserts & Bolts	F-XRJPA	Anchor Inserts & Bolts (3 Ea.) Ambassador 1.00-inch OD x 4.00-inch-L 9x5x5
Aqua Creek Pro Series Pool Lift Cover		Color: Blue
Aqua Creek Battery Charger		
Aqua Creek Refurbish Kit		NH-1-inch-8 Hex Nut Zinc and Battery

Item #2: Photograph and inventory all items to be saved and/or salvaged in and around the pool work.

ATTACHMENTS:
- Project Summary & Scope of Work
- Starting Blocks Specifications and List of Items Needed
- MVHS Site Logistics Plan
- XMI Mobility Inc. Estimate 1127

MURRIETA VALLEY
UNIFIED SCHOOL DISTRICT

Project Information

School Name:	Murrieta Valley High School
Project Address:	42200 Nighthawk Way, Murrieta, CA. 92562
Project Contact:	Jose Contreras, Director of Facilities
Contact Phone Number:	951-623-4031
Contact Email:	jocontreras@murrieta.k12.ca.us
Project Schedule:	**May 5, 2026-July 31, 2025**

Project Summary and Objective

The purpose of this project is to provide a safe learning and working environment for the Murrieta Valley Unified School District staff and students. We need to replace the pool deck, plaster along with all the other requirements that are in the DSA approved drawings/specifications. This is a Public Works project; Prevailing Wages and Payment & Performance Bonds will be required. Furthermore, the lowest, responsive and responsible bidder will be required to be registered with the DIR and a project registration number will be provided.

Project Scope Requirements and Contractor Qualifications

Contractor Qualifications and Project Requirements

The **General Contractor** must possess a **minimum of five (5) years of experience** in school construction projects. All **subcontractors** involved in the pool construction must have a **minimum of three (3) years of experience** in commercial pool projects or have completed **at least one (1) school pool project**.

The contractor must demonstrate the **capability, resources, and appropriate means and methods** to execute all tasks as outlined in the **DSA-approved drawings and specifications**. It is the contractor's responsibility to thoroughly review and understand the specifications to ensure that all project milestones and durations are met.

The **project schedule** is as follows:

- **Commencement Date**: May 5, 2026
- **Completion and Turnover Date**: July 31, 2026

The project must be delivered as a **fully complete and operational facility** by the turnover date.

Dimensions and Measurements

- All dimensions and measurements are approximate and should be verified by an onsite inspection. However, responsibility for verification by whatever means is necessary in the opinion of the bidder is their responsibility. Bidders will not be allowed to increase prices based on failure to confirm actual square footage, obstructions or other conditions.

MURRIETA VALLEY HIGH SCHOOL
"SITE LOGISTICS PLAN"

----- NIGHTHAWK WAY -----



---- WASHINGTON Ave. -----

WATERLINE TECHNOLOGIES, INC.

PSOC
SWIMMING POOL EQUIPMENT & CHEMICALS

SANTA ANA BRANCH
620 N. SANTIAGO STREET
SANTA ANA, CA 92701
714.564.9100

QUOTATION

ORDER NUMBER	
1900979	
ORDER DATE	PAGE
09/22/2025 10:25:17	1 of 2

BILL TO: 2641

MURRIETA VALLEY UNIFIED S.D.
Attn: Accounts Payable for Maintenance
41870 McAlby Court
Murrieta, CA 92562

951-696-1600X1137

SHIP TO: 3646

MURRIETA VALLEY HIGH SCHOOL
24105 WASHINGTON AVE.
KEY # 38 MAP 927-H5
MURRIETA, CA 92562
CALL PAUL 951-239-2891

PO NUMBER	CARRIER	TERMS
STARTING BLOCK QUOTE	OUR TRUCK - SANTA ANA	Net 30

LINE	ITEM DESCRIPTION	ORDERED	PRICE	EXTENDED PRICE
	DELIVERY INSTRUCTIONS: DRIVER - PLEASE REMEMBER TO LOCK CHEMICAL ROOM EVERY TIM AFTER DELIVERY, TRENT 951-409-0154, CALL PAUL 951-239-2891			
1	16-1605 KDI TRACK START SIDE STEP B= 24" Vendor: 1769 Part # : 24530-24558 COMPETITIOR, COME WITH ANCHOR	8	4,980.33	39,842.64
2	16-1012 KDI STRTNG BLK ANCHOR, DUAL 6" ANCHOR Vendor: 1769 Part # : 23103DW 6" DUAL WEDGE ANCHOR SOCKET FOR COMPETITOR STARTING PLATFORMS WITH A B <30" - COMPLETE ASSEMBLY	16	746.35	11,941.60
3	16-1544 KDI TRACKSTART PLUS BACKPLATE KIT Vendor: 1769 Part # : 27500	8	1,128.35	9,026.80
4	16-1545 KDI TRACKSTART PLUS SIDE GRIP KIT Vendor: 1769 Part # : 27501	8	367.50	2,940.00
5	FREIGHT IN INCOMING FREIGHT CHARGES Vendor: 1698 Part # : FREIGHT IN INCOMING FREIGHT - DUE TO CHANGING CONDITIONS WITH FREIGHT AND THE VOLATILITY OF SHIPPING AND HANDLING COS THIS IS AN ESTIMATE AND MAY CHANGE AT THE TIME OF DELIVE	1	1,355.00	1,355.00

WATERLINE TECHNOLOGIES, INC.

QUOTATION

PSOC
SWIMMING POOL EQUIPMENT & CHEMICALS

SANTA ANA BRANCH
620 N. SANTIAGO STREET
SANTA ANA, CA 92701
714.564.9100

ORDER NUMBER	
1900979	
ORDER DATE	**PAGE**
09/22/2025 10:25:17	2 of 2

LINE	ITEM DESCRIPTION	ORDERED	PRICE	EXTENDED PRICE

TOTAL LINES: 5

SUB-TOTAL:	65,106.04
TAX:	5,578.22
AMOUNT DUE:	**70,684.26**

Quote Expires On: 11/21/2025

All items are in accordance with plans and specifications. Waterline Technologies shall not be responsible for misinterpretations of specifications after making a reasonable effort. Material quoted shall be verified by the purchaser as to conforming to specifications and/or quantities. Waterline Technologies shall not be obligated to honor or accept any purchase order based on the quotation, and no contract or obligation on the part of Waterline Technologies shall arise unless and until all of the following conditions have been satisfied: 1. The quote is timely and unconditionally accepted in writing by perspective customer within ten (10) days of the quotation. 2. All terms of the quotation are accepted without modifications or change. 3. Waterline Technologies satisfies itself, in the sole and absolute discretion, regarding the credit worthiness of the prospective customer. 4. It is the responsibility of the purchaser to carefully review the items listed for accuracy and application. 5. Unless revised in writing, the goods listed above are those that will be shipped.

Signature: _____ Date: _____



Click to Zoom in



Paragon Aquatics

KDI Paragon Track Start Competitor Side Step Full Height Starting Platform B= 24"

Write a Review

$4,980.33

Brand	Paragon Aquatics
SKU:	16-1665
Availability:	Dropped Shipped From Manufacture
Weight:	70.00 LBS
Shipping:	Free Shipping

Quantity:

1

Add to Cart | Add to Wish List

4 GREAT REASONS TO BUY FROM US:

DESCRIPTION

SHOW REVIEWS

Track Start Competitor Side Step FULL HEIGHT PLATFORM

Models # 24530 to 24558 Track Start Competitor Side Step Dual Leg (FULL HEIGHT)

Our Premier Starting Platforms with versatile design

Full Height Track Start Top

For competitive swimming a deeper size starting platform top has become the more preferable option. The Track Start top is 24" 32" and can be mounted to a single leg quickset or dual leg stainless steel pedestal. our Anchoring system allows for quick installation and provides a secure base. Customer designs are available for special facility circumstances.


Our highly regarded Track Start Competitor Models (available in side step and rear mount) give swimmers an extra fast takeoff. The 32" x 24" top supports the "track-type" start now used by many competitive swimmers.

- UV inhibited polypropylene top
- Optional Colors and Graphics
- Long Reach Standard Competitor - Single Step, Track Start Competitor Side Step Full Height, and Classic Standard Competitor - use 6 in. competitor anchor
- Long Reach Standard Competitor - Dual Step and Track Start Competitor Rear Mount - use 10 in. competitor anchor
- Track Start Competitor Side Step Full Height and Long Reach Track Start Competitor Rear Mount - 32 in. x 34 in. "track-type" start used by many competitive swimmers.
- Track Start Competitor Side Step Full Height and Long Reach Track Start Competitor Rear Mount - gives swimmers extra fast take off

How to select the Paragon Starting Platform Model for your venue in 5 easy steps.

When choosing a starting platform, your first consideration should be (1) the size of the platform top. (Note: All ruling bodies call for a minimum of 20" x 20" starting platform tops.) Depending upon size (2), you have a choice of single (Parafyte or Quickset Anchor) or dual legs. (3) Select the

≡ SIDEBAR

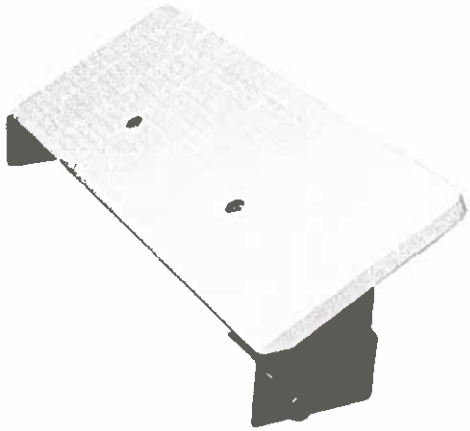

Q Click to zoom in





Paragon Aquatics

KDI Paragon Track Start Plus+ Adjustable Backplate Kit for Track Start Platforms

Write a Review

$1,128.35

Brand	Paragon Aquatics
SKU:	16-1544
Weight:	20.00 LBS
Shipping:	Free Shipping

Quantity:

1

Add to Cart

Add to Wish List

4 GREAT REASONS TO BUY FROM US:

DESCRIPTION

SHOW REVIEWS

Track Start Plus+ Adjustable Backplate Kit

The Track Start PLUS+ starting platform offers enhancements for the competitive swimmer. This is available for all new Track Start Platforms and can also be easily used as a retrofit to any existing Track Start starting platforms.

The PLUS+ Adjustable Backplate optimizes the position of the swimmers rear leg allowing for a more powerful start. Easily adjustable to five front to back positions using the knobs located on the side of the unit. It is so easy to adjust that it can be reset in the middle of a relay race. It can be used with or without relay platfroms for timing systems and can be easily removed for storage.

Can be use with or without the PLUS+ Side Hand Grip Kit which furthers enhances energy transfer during take-off.

PLUS+ Side Hand Grip Kit I.D. No 27501

The Adjustable Backplate supporting frame is constructed of T304 stainless steel, factory spaced and assembled. It is powder coated in Black for additional corrosion resistance. The slide track is T304 stainless steel precisely machined to mate with the support frame locking pins. Stainless steel knobs adjust the Backplate in 3 positions. The footrest is 9" × 24" polypropylene, cross-grooved, white sand coated finish, angled at 30° to render a 90° knee angle. All hardware is stainless steel.


I.D. No. 27500

Optional Color Adder for Sand Finish Footrest

Cordinate the footrest color to the platform color scheme.

Note: The optional color adder is included when ordered with a colored top.

≡ SIDEBAR

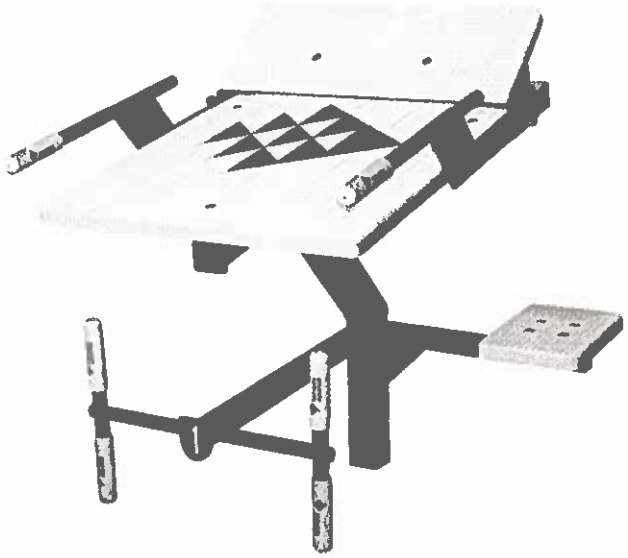

Click to zoom in





Paragon Aquatics

KDI Paragon Track Start Plus+ Side Kit for Track Start Platforms

Write a Review

$367.50

Brand	Paragon Aquatics
SKU:	16-1545
Weight:	10.00 LBS
Shipping:	Free Shipping

Quantity:

1

Add to Cart

Add to Wish List

4 GREAT REASONS TO BUY FROM US:

DESCRIPTION

SHOW REVIEWS

KDI Paragon Track Start Plus+ Side Kit for Track Start Platforms

I.D. No. 27501

The Track Start PLUS+ starting platform offers enhancements for the competitive swimmer. This is available for all new Track Start Platforms and can also be easily used as a retrofit to any existing Track Start starting platforms.

Contains 2 Polished 1.0" OD. T304 stainless steel tubes welded to a heavy duty mounting plate, rubber non-slip grips, and stainless mounting hardware. It is powder coated in Black for additional corrosion resistance.

Custom Color Powder-Coating For Hand-grips

Coordinate the Hand grip color to the platform color scheme. **NOTE: Optional custom color powder-coat is provide at no additional Charge if ordered with a powder-coated starting platform pedestal.**

I.D No. 23995. **Standard color is Black**


Additional Information

Spec Sheet Sp 10.80


Trackstart Plus+ Hand Grip Installation

Trackstart Plus+ Hand Grip Installation


Track Start PLUS+™
Adjustable Backplate and Optional Side Grip Kit

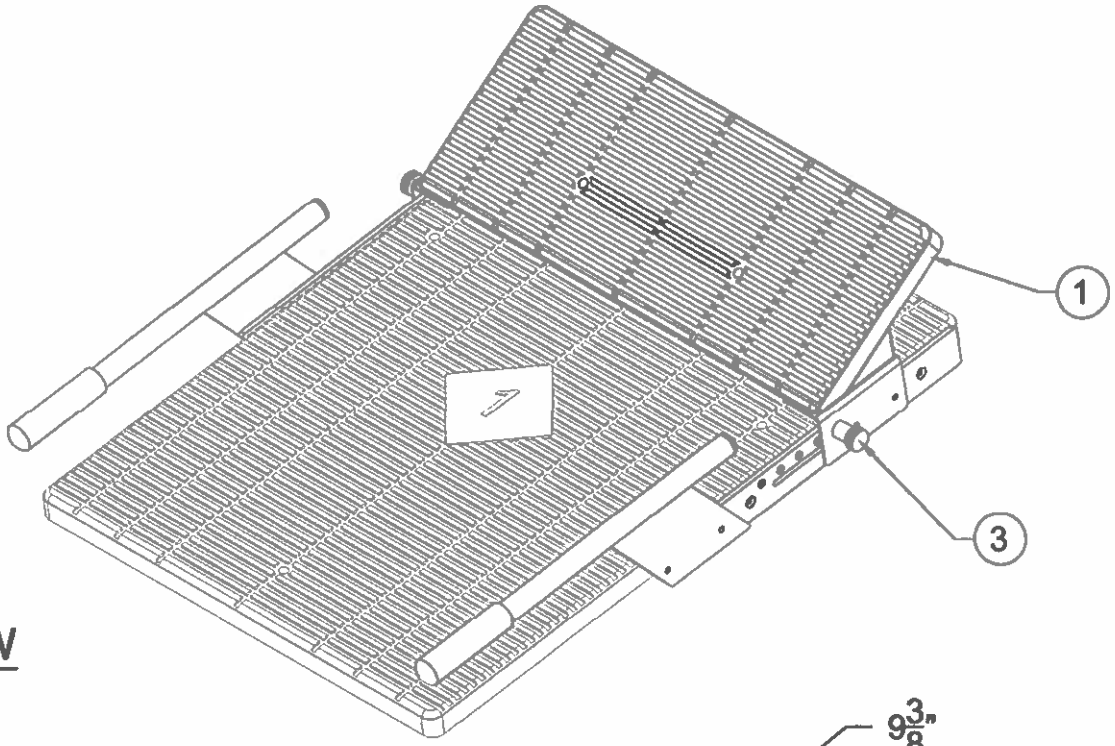

ISO VIEW

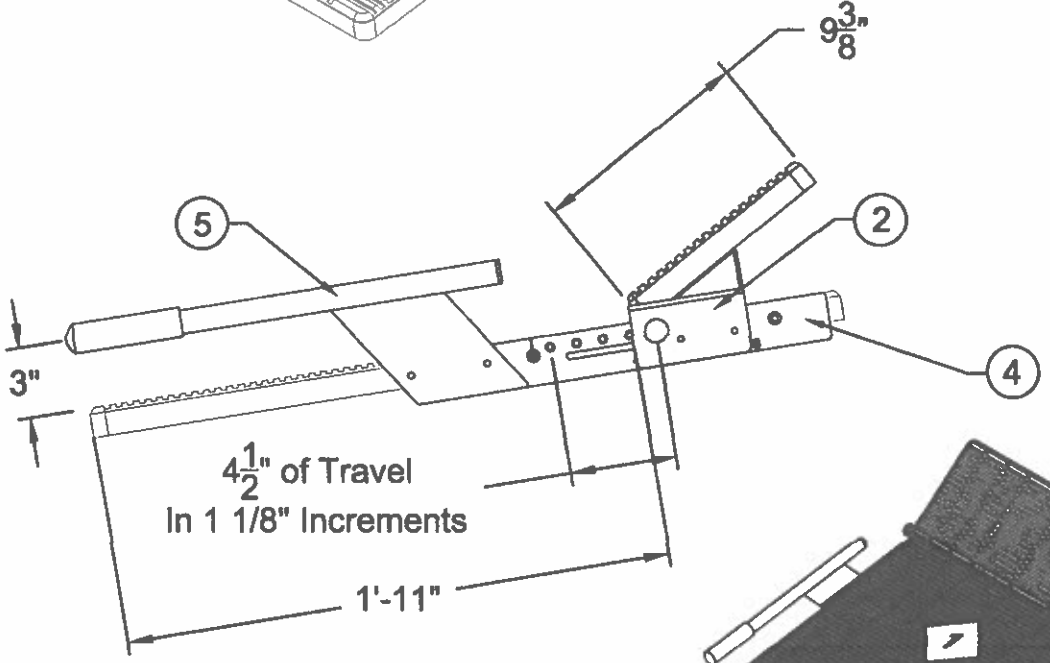

SIDE VIEW

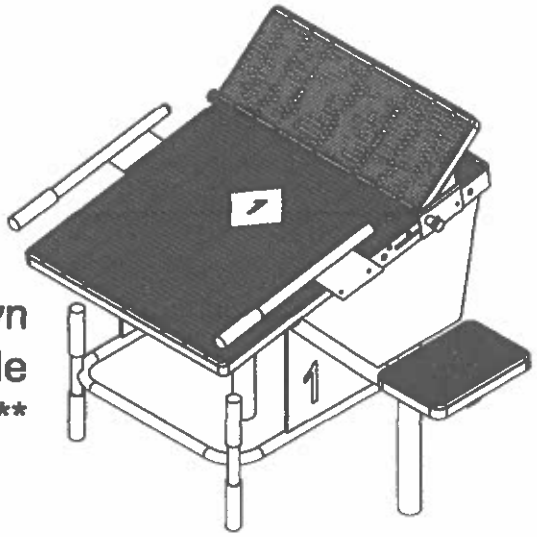

** Track Start PLUS+ Kit Shown Installed on a Track Start Side Step Competitor Platform**

The data represents the latest knowledge available to us at time of presentation. However, Paragon Aquatics and others involved in gathering and presenting this drawing assume no liability for its use


PARAGON AQUATICS
1351 Route 55
LaGrangeville, New York
12540
Phone: 845-463-7200

Drawn by:	JMM	Date:	2/1/10	Approved by: RV	Date: 2/1/10
Sheet Title:	Adjustable Backplate and Opt. Side Grips				

Trackstart PLUS+ Side Bracket and Hand Grips Installation

**** IF OPTIONAL HAND GRIPS WERE ORDERED, CONTINUE TO STEP 3.**

③ Attach the hand grips to the sides of the platform by using (2) 5/16"-24 socket head stainless steel screws,lock washers, & anti-seize provided. Repeat this process on the other side of the platform.

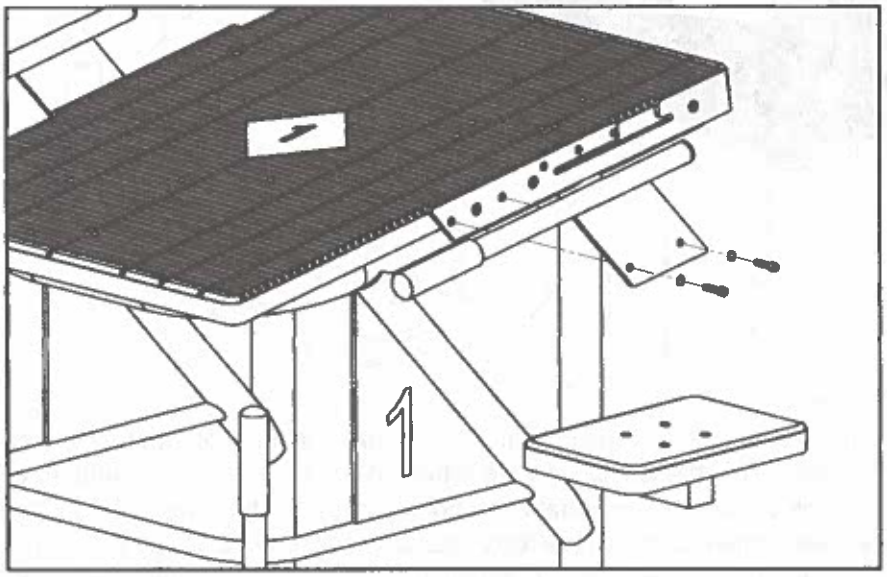

Angled Backplate (P/N 27500) Includes:

DESCRIPTION	QTY	PART #
Backplate Frame Assembly	1	*
Angled Platform, sand finished	1	27502
Side Bracket, Left	1	27507
Side Bracket, Right	1	27508
Backplate Hardware Kit	1	**
#1 Drill Bit	1	N/A
Angled Backplate Drilling Jig	1	27500DJ
Shims for refurbished tops	***	27507S

If optional side grips (P/N 27501) are ordered, also include:

DESCRIPTION	QTY	PART #
Side Hand Grips	2	N/A
Side Grips Hardware Kit	1	****
SAF-T-EZE (Regular Anti-Seize)	2	****

*Backplate Frame Assembly Includes:
- (1) Powdercoated Frame Assembly (#27500PFA)
- (2) Spring Pin (#27506SP) - pre-installed

**Backplate Hardware Kit Includes:
- (6) 1/4"-20 x 1" thread cutting flathead Phillips screws, S/S (#94371)
- (2) 3/8"-16 x 1 3/4" carriage bolts, S/S (#94511)
- (2) 3/8"-16 Hex Head Nut, S/S (#94550)
- (2) 3/8" split lockwasher, S/S (#94562)
- (2) 3/8" flat washer, S/S (#94564)

***Shims to be included if platform tops have been refurbished. Quantity of shims supplied is based on number of platforms. If it is determined shims are required and they have not been provided please contact Pentair customer service at 845-463-7200

****Side Grips Hardware Kit Includes:
- (4) 5/16" split lockwasher, S/S (#94448)
- (4) 5/16"-24 x 3/4" socket head machine screw, S/S (#94457)


The data represents the latest knowledge available to us at time of presentation. However, Paragon Aquatics and others involved in gathering and presenting this drawing assume no liability for its use.
© 2017 Pentair Aquatic Systems

PENTAIR
1351 Route 55
LaGrangeville, NY 12540
Phone: 845-463-7200
Fax: 845-463-7291
www.paragonaquatics.com


Drawn by: AL	Date: 10/10/17	Approved by: RV	Date: 10/10/17		
Sheet Title: TS Plus+ Side Bracket/Hand Grips Installation					
Drawing Number: II-SP10.80		Revision Letter: D		Sheet: 2 of 2	

Trackstart PLUS+ Side Bracket and Hand Grips Installation

1. Set the provided drilling fixture flush to the side and back edges of the existing starting platform top as shown. Using the provided #1 drill bit, create (5) holes into the side of the platform top using the drilling fixture as a guide. Holes should be drilled at a minimum of 1 1/4" deep to ensure the mounting screw will fully seat. Ensure drill is perpendicular to the drilling surface. Repeat this process on the other side of the platform.
** PLEASE NOTE THAT THE TRACKSTART PLUS SIDE BRACKETS ARE DESIGNED FOR USE ONLY ON TRACKSTART (24" x 32") PLATFORM TOPS.

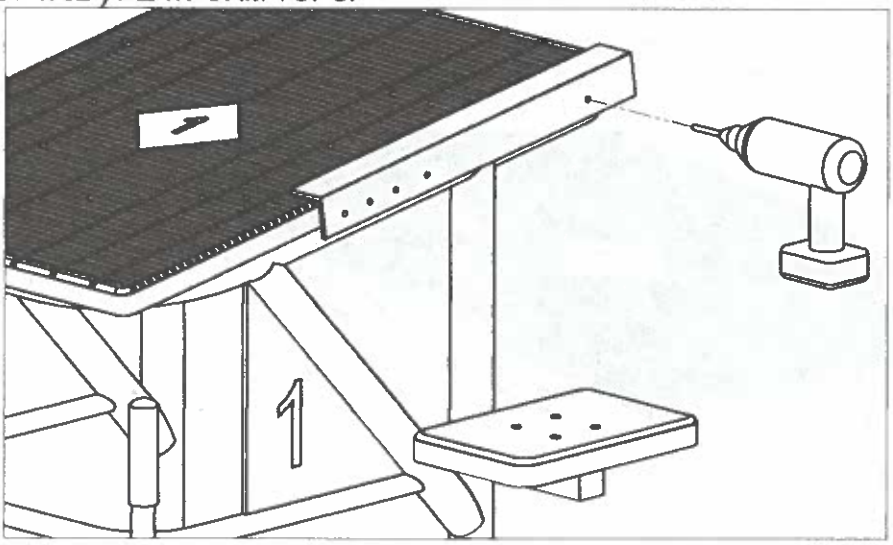

2. Prior to installation of the side brackets measure the width of the starting platform top. Over time some starting platform tops may have been refurbished. During the refurbishing process a small amount of material is removed to refresh the look of the top. Tops that have not been refurbished will measure 23 ½" (±1/32") and the side plates can be installed without shims. If the tops measure less than 23 ½" by 1/16" or more, shims will need to be installed between the top and side plates. Each shim, pn 27507S, measures 1/16" thick. For example, if the top measures 23 3/8", one shim is required on each side of the platform to net a width of 23 ½". Once it is determined if shims are needed attach each side bracket using (3) 1/4"-20 x 1" flat head thread-cutting stainless steel screws (provided). Hand tighten using a Phillips screwdriver. Overtightening may strip the threaded holes. Note that (2) drilled holes will not be used to attach the side bracket. Repeat this process on the other side of the platform. As a final check, the dimension from the outside to outside of the side plates should be 24".

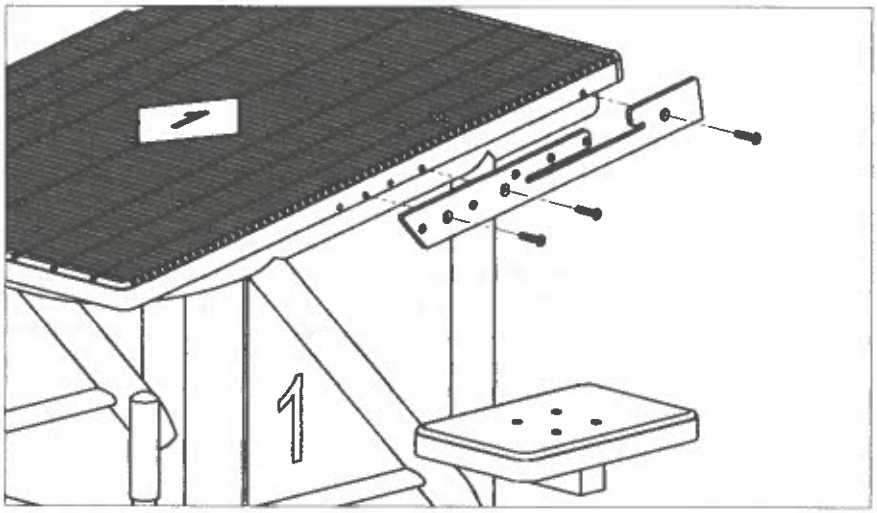

The data represents the latest knowledge available to us at time of presentation. However, Pentair and others involved in gathering and presenting this drawing assume no liability for its use.
© 2017 Pentair Aquatic Systems

PENTAIR
1351 Route 55
LaGrangeville, NY 12540
Phone: 845-463-7200
Fax: 845-463-7291
www.paragonaquatics.com

Drawn by: AL	Date: 10/10/17	Approved by: RV	Date: 10/10/17		
Sheet Title: TS Plus+ Side Bracket/Hand Grips Installation					
Drawing Number: II-SP10.80		Revision Letter: D		Sheet: 1 of 2	

Track Start PLUS+™
Adjustable Backplate and Optional Side Grip Kit

Part Number **27500** - Adjustable Backplate
27501 - Optional Side Grip Kit

NOTE: The Adjustable Backplate can only be used on platforms utilizing the Track Start style (24"x 32") polypropylene tops.

Specifications

1. The Adjustable Backplate (24" wide x 9 3/8" deep) shall be constructed of UV inhibited high density polypropylene. The backplate shall have a dual non-skid, cross-grooved, white sand textured finish surface. Custom sand finish colors are available upon request. The Adjustable Backplate can be used with or without a Relay Judges Platform (RJP).

2. The adjustable backplate mounting assembly shall be constructed from T304 stainless steel. The mounting assembly shall be powdercoated with a gloss black finish. Custom colors available upon request.

3. The mounting assembly shall use spring loaded pins which allow the backplate to be adjusted to (5) different positions in 1 1/8" increments. The spring loaded pins will allow the removal of the backplate if needed during competition or for storage. When set to the furthest forward position the Adjustable Backplate allows for the FINA required minimum of 0.5meter x 0.5meter (19 $\frac{5}{8}$" x 19 $\frac{5}{8}$") of starting platform top area.

4. The slide plates shall be constructed of $\frac{1}{4}$" thick, T304 stainless steel polished to a 320 grit finish. The slide plates shall be held to the starting platform top using (3) self tapping $\frac{1}{4}$"-20 x 1" flathead screws (provided) on each side. The slide plates can be installed in the field as a retro-fit or factory installed at the time of starting platform order. **NOTE: The Adjustable Backplate can only be used on platforms utilizing the Track Start style (24"x 32") polypropylene tops.**

5. The optional Side Grip Kit shall include a pair of stainless steel frames with rubber hand grips. The frames shall be constructed of T304 stainless steel polished to a 320 grit finish. The frames shall attach to the starting platform top using (2) self tapping $\frac{1}{4}$"-20 x 1 $\frac{1}{2}$" screws (provided) per side. Upon request, the side frames can be powdercoated as an option. The Side Grip Kit can be installed in the field or at the factory *at the time of the starting platform order. The Side Grip Kit shall work with and without the use of the* Adjustable Backplate.

General

The stainless steel frame shall be electro-chemically passivated on all worked areas for maximum corrosion *resistance. All hardware shall be 18-8 stainless steel.*

Options

23994C - Color Upgrade for Adjustable Backplate sand finish
23995 - Powdercoat Upgrade for Optional Side Grip Kit

WARNING : Starting platforms are to be used only by trained competitive swimmers. Only shallow racing dives should be executed. Impact with the pool bottom can cause serious injury. Please refer to applicable codes and regulations for your specific installation.

The data represents the latest knowledge available to us at time of presentation. However, Paragon Aquatics and others involved in gathering and presenting this drawing assume no liability for its use

PARAGON AQUATICS
1351 Route 55
LaGrangeville, New York
12540
Phone: 845-463-7200


Drawn by: JMM	Date: 2/1/10	Approved by: RV	Date: 2/1/10

Sheet Title: Adjustable Back Plate and Opt. Side Grips


Trackstart PLUS+ Hand Grip Installation

① Set the provided drilling fixture flush to the side and back edges of the existing starting platform top as shown. Using the provided #1 drill bit, create (2) holes into the side of the platform top using the drilling fixture as a guide. Holes should be drilled at a minimum of 1 1/4" deep to ensure the mounting screw will fully seat. Ensure drill is perpendicular to the drilling surface. Repeat this process on the other side of the platform.

** PLEASE NOTE THAT THE TRACKSTART PLUS SIDE BRACKETS ARE DESIGNED FOR USE ONLY ON TRACKSTART (24" x 32") PLATFORM TOPS.

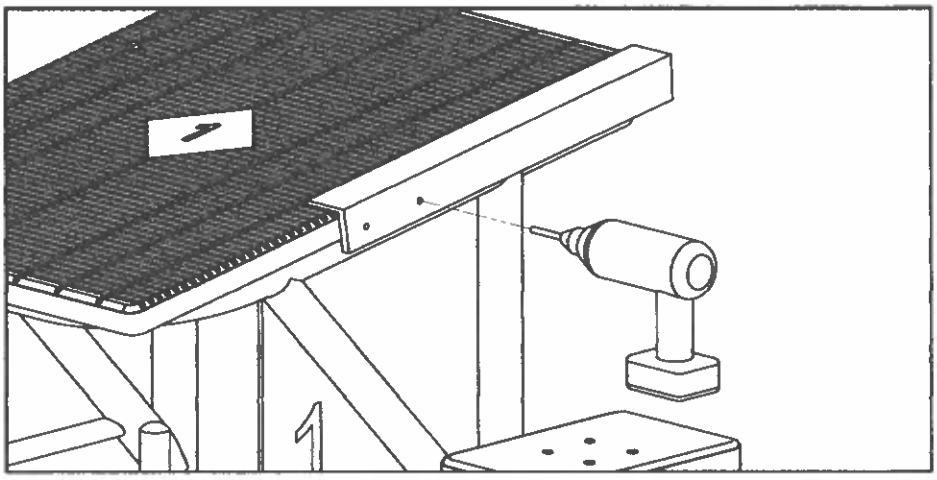

② Attach hand grip using (2) 5/16"-24 x 3/4" socket head stainless steel screws and lock washers (provided). Hand tighten using an allen wrench. Overtightening may strip the threaded holes. Repeat this process on the other side of the platform.

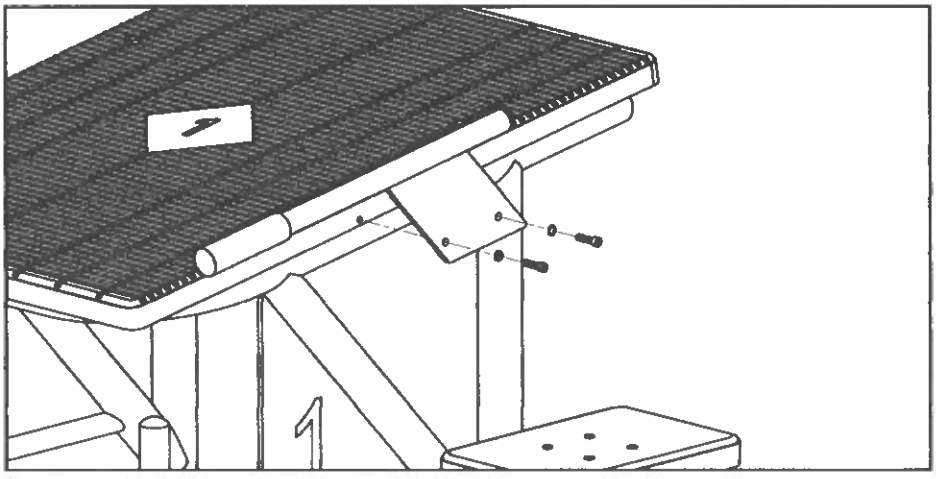

Side Hand Grips Kit (P/N 27501) Includes:

DESCRIPTION	QTY	PART #
Side Hand Grips	2	N/A
Side Grips Hardware Kit	1	*
#1 Drill Bit	1	N/A
Side Grip Drilling Jig	1	N/A

*Side Grips Hardware Kit Includes:
- (4) 5/16" split lockwasher, S/S (#94448)
- (4) 5/16"-24 x 3/4" socket head machine screw, S/S (#94457)

The data represents the latest knowledge available to us at time of presentation. However, Paragon Aquatics and others involved in gathering and presenting this drawing assume no liability for its use.

PARAGON AQUATICS
1351 Route 55
LaGrangeville, New York
12540
Phone: 845-463-7200

Drawn by:	RV	Date:	2/15/11	Approved by:	JMM	Date:	2/15/11

Sheet Title: TS Plus+ Hand Grip Installation

ESTIMATE

ZMI Mobility Inc
68895 Perez Rd
Ste I4
Cathedral City, CA 92234

support@zmimobility.com
+1 (760) 992-0182
zmimobility.com

Bill to
David Paule
42200 Nighthawk
Murrieta, CA 92562

Ship to
David Paule
42200 Nighthawk
Murrieta, CA 92562

Estimate details
Estimate no.: 1127
Estimate date: 10/02/2025

#	Date	Product or service	SKU	Description	Qty	Rate	Amount
1.		**Ambassador Anchor Jig Plate**	F-XRJPA	ANCHOR JIG PLATE - PRO XR & AMBASSADOR W-BOND LUG	1	$448.77	$448.77
2.		**Ambassador Anchor Inserts & Bolts**	F-XRAI4	ANCHOR INSERTS & BOLTS (3EA) - AMBASSADOR - 1.00" OD X 4.00" L - 9x5x5	1	$489.01	$489.01
3.		**Aqua Creek Pro Series Pool Lift Cover**	F-120PPC	Color: Blue	1	$319.86	$319.86
4.		**Aqua Creek Battery Charger**			1	$376.12	$376.12
5.		**Aqua Creek Refurbish Kit**		NH - 1"-8 HEX NUT ZINC and Battery	1	$452.25	$452.25

Subtotal	$2,086.01
Sales tax	$110.04
Total	**$2,196.05**

Accepted date

Accepted by