LOUISIANA DEPARTMENT OF ENVIRONMENTAL QUALITY OES, PUBLIC PARTICIPATION AND PERMIT SUPPORT DIVISION NOTIFICATIONS AND ACCREDITATIONS SECTION



Required Elements for Asbestos Management Plans for School and State Buildings Form AAC-8

LAC 33:III.Chapter 27

In accordance with federal and state law, Schools (LEAs) and State Buildings are required to determine whether asbestos containing material (ACM) is present, what types of ACM may be present, and where the ACM is located. This information and subsequent activities to ensure that the ACM is maintained to prevent or repair any damages to the ACM is documented in the Asbestos Management Plan. The completion and maintenance of the AAC-8 will ensure that the Management Plan includes the plan elements required by law to meet federal (40 CFR Part 763) and state (*LAC 33:III.Chapter 27*) requirements and will facilitate accurate and timely state review.

<u>Directions</u>: Please note that the current AAC-8 form is an interactive Asbestos Management Plan and the information shall be typed or legibly hand written on the form itself, not referencing another document as in the previous AAC-8 form. This form must be completed properly by an LDEQ accredited Management Planner and submitted as the Asbestos Management Plan required for a school (Kindergarten through Post-graduate), state owned, leased, or state-used building. A written explanation must be provided for any incomplete section. The explanation must be included in the section or if too long, attached behind the corresponding section.

All schools must submit their Asbestos Management Plan directly to LDEQ, OES, Public Participation and Permit Support Division, Notifications and Accreditations Section, P.O. Box 4313, Baton Rouge, LA 70821-4313. For a School Building Exclusion (LAC 33:III.2735), only complete the AAC-8 Form, pages 1, 4, and 5 (Sections I, II, and III), and provide supporting evidence as applicable.

Any Asbestos Management Plan for a **state building**, whether it is owned, leased, or otherwise used as a state building must submit the Asbestos Management Plan directly to **Real Estate Leasing Administrator**, **Division of Administration**, **Facility Planning and Control**, **Real Estate Leasing Section**, P.O. Box 94095, Baton Rouge, LA 70804-9095.

APPLICABILITY:

The building is being used for the following purpo	ose:
School (Kindergarten through Post-Graduate)	New School (Constructed after October 12, 1988)
State building (Owned, Leased, or Used)	Other:

STATE BUILDING EXEMPTION (LAC 33:III.2701.B)

I.	If the following exemption applies, complete pages 1, 2, 5 (Section A: I and III), and provide supporting evidence as applicable. Note: A.II. does not apply to state buildings
	1. This building is <u>not</u> a school building (see definition of school building) used for grades kindergarten through post-graduate; and
	2. This state building was built after 1978 and is exempt from the requirements of this Chapter because there is no possibility of the presence of asbestos (<i>LAC 33:III.2701.B.2</i>); or
	3. This state building was built before 1979 and is exempt from the requirements of this Chapter because an inspection was conducted in accordance with <i>LAC 33:III.2707.A</i> , and no asbestos is contained in the building, provided that:
	a. a copy of the inspection report is submitted within 90 days of the inspection;b. a copy of the report is maintained at the administrative office; andc. no asbestos material was added in a renovation.
II.	If an exemption is being requested from the requirements of submitting an asbestos Management Plan as indicated in <i>LAC 33:III.2701.B.2</i> , "State buildings built after 1978 are exempt from the requirements of this Chapter unless there is the possibility of the presence of asbestos or the building is used for education of grades kindergarten through post-graduate."
	The undersigned does hereby certify that the building will be used as a state building and there is no possibility of the presence of asbestos in the building as stated above (<i>LAC</i> 33:III.2701.B.2).
	Responsible Individual (printed/typed name): Responsible Individual Signature: Responsible Individual Contact Information: Fax No: _() Email Address:
III.	If an exemption is being requested from the requirements of submitting an asbestos Management Plan as indicated in <i>LAC 33:III.2701.B.3</i> , "This state building was built before 1979 and is exempt from the requirements of this Chapter because an inspection was conducted in accordance with <i>LAC 33:III.2707.A</i> , and no asbestos is contained in the building or on the outside of the building (<i>LAC 33:III.2701.B.3.b.ii</i>)," attach the inspection report as noted above and a copy of current Louisiana inspector accreditation certificate behind this page. (<i>LAC 33:III.2707.A.5</i>).
	Name of Louisiana Accredited Inspector: Louisiana Accredited Inspector Signature: Louisiana DEQ Accreditation No: Expiration Date:

STATE BUILDING EXEMPTION (Continued) (LAC 33:III.2735.C)

*Please note that, in accordance with LAC 33:III.2735.C, "If ACBM is subsequently found in a homogeneous or sampling area of the state government [the responsible party for the state building] that had been identified as receiving an exclusion by an accredited inspector under Paragraph A.3, 4, or 5 of this Section, or an architect, project engineer, or accredited inspector under Paragraph A.7 of this Section, the state government [responsible party for the state building] shall have 180 days following the date of identification of ACBM to comply with this Chapter."

SCHOOL BUILDING EXCLUSIONS (LAC 33:III.2735)

I.

If the following exclusions apply, complete pages 1, 4, 5 (Section A: I, II, and III), and provide supporting evidence as applicable.
a. An architect or project engineer responsible for the construction of a new school building built after October 12, 1988, or an accredited inspector signs a statement that no ACBM was specified as a building material in any construction document for the building or, to the best of his or her knowledge, no ACBM was used as a building material in the building. The local education agency shall submit a copy of the signed statement of the architect, project engineer, or accredited inspector to the Office of Environmental Services and shall include the statement in the management plan for that school.
The signed statement (supporting evidence) shall be placed behind this Section.
*Please note that, in accordance with LAC 33:III.2735.C, "If ACBM is subsequently found in a homogeneous or sampling area of a local education agency or the state government [responsible party for the state building] that had been identified as receiving an exclusion by an accredited inspector under Paragraph A.3, 4, or 5 of this Section, or an architect, project engineer, or accredited inspector under Paragraph A.7 of this Section, the local education agency or the state government [responsible party for the state building] shall have 180 days following the date of identification of ACBM to comply with this Chapter."
b. If the school or state bldg has been abated, and a thorough reinspection has confirmed that there is no friable and nonfriable known or assumed ACBM in each building, further reinspections are no longer required (LAC 33:III.2707.B.1).
*Note in the management plan all of the information contained in the reinspection, including the inspection report, sampling and analysis report, inspector's name, address, contact information, including telephone no and email address, etc.
c. If the school meets either a. or b. above, periodic surveillance is no longer required.

^{*}There are no exclusions from maintaining an Asbestos Management Plan for Schools, which shall be kept in the administrative office for review. The management plan shall be available, without cost or restriction, for inspection by representatives of EPA and the state, and the public, including parents, teachers, other school or public personnel, and their representatives. The local education agency or the responsible party for the state building may charge a reasonable cost to make copies of management plans. (LAC 33:III.2723.F)

Section A

Print Legibly or Type

<u>FACILITY INFORMATION</u> <u>(LAC 33:III.2723.D.1)</u>

Building Information (Required for Schools and State Buildings): Name of Building **CPSB** Assessment Building 1618 Mills Street **Building Address** City: Lake Charles State: LA Zip code: 70601 1960s era Date of Construction of Building **Information Required for a School:** Responsible Official for School Kenny Brown Print/Type Name & Title School is Owned by: Name of Building Owner (School Board, other) Calcasieu Parish School Board ☐ City ☐ Parish ☐ State ☐ Private P.O. Box 800 Mailing Address City: Lake Charles City: Lake Charles State: III. **Lessor Information** (Required if School or State building is leased): Lessor's Name Lessor's Address City: State: Zip code: Lessor's Contact Person Lessor's Email Address Lessor's Telephone No. (Lessor's Fax No. (IV. Is Asbestos present in the building? ⊠ Yes ☐ No V. Yes, the building contains: Friable ACBM Nonfriable ACBM

form_7082_r02 Revised: 8/9/2019 **ACBM**

Friable and Nonfriable suspected ACBM assumed to

Section B

INSPECTIONS CONDUCTED

(Check Appropriate Box)

☐ Inspections conducted <u>before</u> December 14, 1987 – Complete all Section A and B, Part I. (<i>LAC 33:III.2723.D.2</i>)	
Inspections conducted <u>after</u> December 14, 1987 – Complete all Sections A-G, except Section B, Part I. (<i>LAC 33:III.2723.D.3 and 2707</i>)	

If the inspection report was conducted <u>before</u> December 14, 1987, attach inspection report behind Section B, Part I.

If the inspection report was conducted <u>after</u> December 14, 1987, attach inspection report behind Section B, Part II.

Section B Part I

A. The following shall be in	ncluded for each inspection conducted	l <u>before</u> December 14, 1987:	
☐ Date of Inspection (<i>LAC</i>	33:III.2723.D.2.a)		
☐ Bulk Sampling Location	Diagram – (<i>LAC 33:III.2723.D.2.b</i>):		
Location of Sampling Area	Approx. Square or Linear ft of any Homogeneous or Sampling Areas where Material was Sampled for Asbestos Containing Material (ACM)	Exact Locations where Bulk Samples were Collected	Date of Collection

Attach blueprints, diagrams or written descriptions of all homogeneous or sampling areas behind Section B, Part I.

Section B Part I

Analysis (<i>LAC 33:III.2723.D.2.c</i>):
 Copy of analyses of any bulk samples taken Date of Analyses Copy of any other lab reports pertaining to the analyses
Response Actions/Preventative Measures (<i>LAC 33:III.2723.D.2.d</i>):
 Description of any response actions or preventative measures taken to reduce exposure Names and addresses of the contractors involved Start and completion dates of the work Results of any air samples analyzed during and upon completion of work
A description of assessments, required to be made of material that was identified before December 14, 1987, as friable Asbestos Containing Building Material (ACBM), including all Thermal System Insulation (TSI) or friable suspected ACBM (<i>LAC 33:III.2723.D.2.e</i>).

Section B Part I

Name	Accreditation No	State of Accreditation	Expiration Date	Signature

Section B Part II

B. The following shall be included for each inspection conducted after December 14, 1987:

List the following information for each accredited inspector who performed the inspection and re-inspection(s). (*LAC 33:III.2707.A.2*, 2705, 2709, & 2711). At least once every three years after a management plan is in effect, each local education agency shall conduct a reinspection. (*LAC 33:III.2707.B.1*) At least once every six months after a management plan is in effect, each local education agency or the state government shall conduct periodic surveillance. (*LAC 33:III.2721.B.1*) Please attach a copy of each inspector's Louisiana DEQ accreditation certificate behind Section B, Part II.

Inspection/Re-inspection	Inspector's Name (Printed or Typed)	Louisiana	Inspector's Signature
Date		Accreditation No	
See archive file data for			
records prior to 2022			
12/12/22	Jeffrey Johnson	SI200444	97
4/10/2025	Todd Peterson	MI165930	Tadel Eleran

Calcasieu Parish School Board

Reinspection and Asbestos Management Plan Update – June 2025

for

Assessment (1618 Mill Street)

April 15, 2025

25007

Prepared by:

Chris White

Wynn L. White Consulting Engineers, Inc. P.O. Box 83527 Baton Rouge, LA 70884-3527 (225) 761-9141

I. Introduction

A. Summary

The visual re-inspection found non-friable materials in the facility. The assumed non-friable ACBM floor tile/mastic beneath the millwork is in good overall condition and may remain in the facility until its condition deteriorates or is affected by renovation or demolition. There was one new building added to be evaluated for asbestos materials.

B. Background

The Asbestos Hazard Emergency Response Act (AHERA) became law on October 12, 1986. The law required Environmental Protection Agency (EPA) to develop regulations addressing asbestos in schools. The Louisiana Legislature enacted Title 33, Environmental Quality, Part III Air, Chapter 27 Asbestos-Containing Materials in Schools and Public Buildings Regulations on September 20, 1989. The Louisiana act follows the AHERA regulations and applies to State owned or leased buildings. This re-inspection report is prepared according to AHERA and Louisiana guidelines.

II. Inspection Results

A. Purpose and Inspection Data

The purpose of the re-inspection is to locate and assess ACBM. The building was inspected, suspect materials located, and the condition assessed. The building was re-inspected to identify and assess asbestos containing building materials on April 10, 2025. The inspection and assessment were performed by Todd Peterson, who is a Louisiana Department of Environmental Quality accredited Inspector (# MI165930).

B. Friable Asbestos Assessments

There is no friable ACBM in the facility.

III. Recommended Preventive Measures and Response Actions

The non-friable ACBM may remain in the facility as long as it is not subjected to any activity that may cause damage to its present condition or affected by renovation or demolition activities.

IV. Asbestos Remaining Upon Completion of Response Actions

The non-friable material is in good condition and may remain in the facility.

V. Re-inspection, Operation and Maintenance Activities, and Periodic Surveillance Implementation Schedule

Periodic Surveillance of the facility is required every six (6) months to assess the condition of the asbestos containing materials remaining in the building. Re-inspection is required every three (3) years until the asbestos containing materials are removed. Below is a schedule for periodic surveillance and re-inspection:

Periodic Surveillance
Puly 2027
January 2028
Re-inspection
July 2028

VI. Information Program

Training of custodians or maintenance personnel is required if the building contains asbestos, and should be completed within thirty (30) days of employment. Documentation of training shall be placed with the Management Plan for the facility. Calcasieu Parish School Board shall notify in writing occupants of the building of the availability of the management plan.

VII. Resource Evaluation

The estimated annual cost for training and periodic surveillance is six hundred dollars (\$600). The estimated cost to remove the asbestos containing materials is fifteen thousand dollars (\$15,000).

VIII. Consultant Data

Wynn L. White Consulting Engineers, Inc. used LDEQ accredited personnel to carry out the re-inspection of the facility. The following personnel were involved in preparation of the re-inspection report: Todd Peterson (Inspector No. MI165930) and Chris White (Management Planner No. JP095575).

IX. Designated Person

Kenny Brown has been designated to see that the duties required by AHERA and LAC 33:III. Chapter 27.H are carried out. Mr. Brown's office is located at 3310 Broad Street Lake Charles, LA 70602.

X. Conclusion

The re-inspection and assessment found assumed non-friable asbestos containing materials. The non-friable ACBM is in good overall condition and may remain in the facility until affected by renovation or demolition. There was one new building added to be evaluated for asbestos materials.

Asbestos Reinspection

Campus Name: <u>Assessment (1618 Mills)</u>

Campus Number: _ Inspector Name:

WYNN L. WHITE CONSULTING ENGINEERS, INC. P.O.B. 83527 Baton Rouge, LA 70884 (225) 761-9141 Form 4.9.63.14 Project Number: 2500 7

The same of the sa		
Building Number	Comments	
210	1/2	
211	IT. in good condition. Non-frielde.	
212 N	1	
	1	
214	L.	
215 N	A	
216	·A	
217	A control of the cont	
218 N	A-	
219 N	4	
220 N/	A	

ture:	Date: 04-10-25	Sheet 1 of 1

STATE OF LOUISIANA DEPARTMENT OF ENVIRONMENTAL QUALITY

certifies that

William T Peterson

Has complied with all requirements of the Louisiana Department of Environmental Quality and is authorized to perform the duties of

Asbestos Inspector

Accreditation No. MI165930

AI No. 165930

Date of Issuance April 29, 2025

Expiration March 28, 2026

Failure to comply with all applicable provisions of La. R.S. 2025.E. (1)(a) and La. R.S. 2025.F. (2)(a) may result in civil and/or criminal enforcement actions by the State.

Permit Support Services Division
Office of Environmental Services

STATE OF LOUISIANA DEPARTMENT OF ENVIRONMENTAL QUALITY

certifies that

Jeffrey Johnson

Has complied with all requirements of the Louisiana Department of Environmental Quality and is authorized to perform the duties of

Asbestos Inspector

Accreditation No. OI200444

AI No. 200444

Date of Issuance October 21, 2022

Expiration October 4, 2023

Failure to comply with all applicable provisions of La. R.S. 2025.E. (1)(a) and La. R.S. 2025.F. (2)(a) may result in civil and/or criminal enforcement actions by the State.

OUISIANA

Permit Support Services Division
Office of Environmental Services

Section B Part III

Sampling:

A. Attach a blueprint or diagram of the building which identifies each location where material was sampled for ACM. Assign a sample identifier to each sample collected.

Attach the document behind Section B, Part III. (LAC 33:III.2709 and 2723.D.3.b)

- B. Attach a table of all the bulk samples collected, including the following: Attach the document behind Section B, Part III. (LAC 33:III.2709 and 2723.D.3.c):
 - 1. The corresponding sample identifier.
 - 2. The approximate square or linear footage where material was sampled for ACM.
 - 3. The date of collection for each sample.
 - 4. Identify whether the sample collected was friable, nonfriable or assumed ACBM.
 - 5. Schematic of the building of floor documenting the location of the samples taken.

C. Describe the manner used to determine sampling location. Attach written statement behind Section B, Part III. (<i>LAC 33:III.2709</i>)
Name of Louisiana Inspector Collecting Samples: Todd Peterson
Accredited Inspector's Signature: Task Peterson
Louisiana Accreditation No: MI165930_
Date of Expiration: $3/28/2026$



50'

FLOOR TILE/MASTIC ASSUMED BENEATH MILLWORK

210 MAIN BUILDING

EARLY CHILDHOOD EDUCATION DEPARTMENT

T-BUILDING 107

T-BUILDING 108 213

T-BUILDING 109

A-1 BUILDING 215

216 A-2 BUILDING

T-BUILDING 123 217

T-BUILDING 122


MAINTENANCE STORAGE #1

220 MAINTENANCE STORAGE #2

This drawing and design are the property of Wynn L. White Consulting Engineers, Inc. They are submitted on the condition that they are not to be used, reproduced, or copied, in whole or in part, or used for furnishing information to others, without prior written consent of Wynn L. White Consulting Engineers, Inc. All common law rights of copyright and otherwise are hereby specifically reserved.

◇ THIS DRAWING IS APPROVED FOR CONSTRUCTION

◆ THIS DRAWING IS NOT APPROVED FOR CONSTRUCTION



WYNN L. WHITE CONSULTING ENGINEERS, INC PHONE: (225) 761 - 9141 FAX: (225) 761 - 4450 BOARD SCHOOL MANAGEMENT ATE BUILDING PARISH ASSESSMENT ASBESTOS PLAN UPDA CALCASIEU PROJECT: SHEET: CLIENT:

PROJECT NUMBER 25007 FACILITY NUMBER 141 REVISION NO. DATE

DRAWN BY: CHECKED BY: CMW 8/11/2025

SCALE: AS NOTED SHEET OF

Section B Part IV

In accordance with LAC 33:I.Chapter 45, LELAP Accreditation is required by laboratories

A. Laboratory and Analysis Information (LAC 33:III.2711)

performing analysis. Attach a copy of the LELAP accreditation certificate and scope of accreditation behind Section B, Part III.
Attach a copy of the analyses of any bulk samples collected and analyzed. Place analyses report behind Section B, Part IV of the application. The Lab analysis <u>MUST</u> include the following:
☐ Name of Laboratory that analyzed the bulk samples;
Address of Laboratory;
Statement that Laboratory meets the requirements of <i>LAC 33:III.2711.A</i> ;
☐ Date of Report which meets the requirements of <i>LAC 33:I.5313.A and 5313.B</i> ;
☐ Name of person performing the analysis; and
☐ Signature of person performing the analysis.
B. Assessment (LAC 33:III.2713)
Within 30 days of the assessment, an accredited inspector shall provide a written assessment required by <i>LAC 33:III.2713</i> for <u>all</u> ACBM and suspected ACBM assumed to be ACM. Classification shall be given as indicated in <i>LAC 33:III.2713.B.1-7</i> , e.g. indicate whether the ACM is damaged or significantly damaged thermal system insulation, damaged friable surfacing etc. Write in space below or attach written statement behind Section B, Part IV.
Check if there is no ACM is in the building:
Name of Louisiana Inspector Collecting Samples:
Accredited Inspector's Signature: Todal Celescon
Louisiana Accreditation No: MI165930
Date of Expiration: $\frac{3/28/2026}{}$



April 30, 2021

Mr. Mark Sutton Calcasieu Parish School Board 3800 Mallard Cove Drive Lake Charles, LA 70615 (sent via email)

RE: April 2021 Assessment Building Asbestos Bulk Sampling

20046

Dear Mark:

I have enclosed the analytical results for the asbestos bulk samples Bakari Weiss and Todd Peterson, accredited asbestos inspectors, collected on April 16 and April 20, 2021. This report is for your review and files.

EMSL Analytical, Inc. of Baton Rouge, LA analyzed the asbestos samples using Polarized Light Microscopy (PLM). Laboratory analysis did not detect the presence of asbestos in sampled materials. Other sampling data shows the presence of asbestos containing materials at the facility.

I recommend you have us prepare asbestos abatement specifications and conduct asbestos air monitoring/contractor observation for materials that will be disturbed by repair and renovation work activities.

If you have questions or would like to discuss the project, please call me at (225) 761-9141 extension 2.

Very truly yours,

Wynn L. White Consulting Engineers, Inc.

Chris White, P.E., LEED AP

Project Manager

Clo white

Enclosures: Asbestos Bulk Sample Data, EMSL Analytical, Inc. Reports 252101760 and

252101831

Voice: (225) 761-9141 Fax: (225) 761-4450 www.wynnwhite.com



Sample Number	Material Description	Sample Location	Result
042021BW1	Clear-White Caulk/Glazing	Building 100	No Asbestos Detected
042021BW2	Clear-White Caulk/Glazing	Building 100	No Asbestos Detected
042021BW3	Clear-White Caulk/Glazing	Building 100	No Asbestos Detected
042021BW4	Clear-Black Caulk/Glazing	Building 200	No Asbestos Detected
042021BW5	Clear-Black Caulk/Glazing	Building 200	No Asbestos Detected
042021BW6	Clear-Black Caulk/Glazing	Building 200	No Asbestos Detected
041621TP4	2' x 4' White with Long Holes (Longways) Ceiling Tile	T-Building 1	No Asbestos Detected
041621TP5	2' x 4' White with Long Holes (Longways) Ceiling Tile	T-Building 1	No Asbestos Detected
041621TP6	2' x 4' White with Long Holes (Longways) Ceiling Tile	T-Building 1	No Asbestos Detected
041621TP7	12" White with Blue Specks Flooring	T-Building 1	No Asbestos Detected
041621TP8	12" White with Blue Specks Flooring	T-Building 1	No Asbestos Detected
041621TP9	12" White with Blue Specks Flooring	T-Building 1	No Asbestos Detected
041621TP10	2' x 4' White with Long Holes (Crossways) Ceiling Tile	T-Building 2	No Asbestos Detected
041621TP11	2' x 4' White with Long Holes (Crossways) Ceiling Tile	T-Building 2	No Asbestos Detected
041621TP12	2' x 4' White with Long Holes (Crossways) Ceiling Tile	T-Building 2	No Asbestos Detected
041621TP13	12" White with Gray Specks Flooring	T-Building 2	No Asbestos Detected
041621TP14	12" White with Gray Specks Flooring	T-Building 2	No Asbestos Detected
041621TP15	12" White with Gray Specks Flooring	T-Building 2	No Asbestos Detected
041621TP16	2' x 4' White with Circle Hole Pattern Ceiling Tile	T-Building 3	No Asbestos Detected
041621TP17	2' x 4' White with Circle Hole Pattern Ceiling Tile	T-Building 3	No Asbestos Detected
041621TP18	2' x 4' White with Circle Hole Pattern Ceiling Tile	T-Building 3	No Asbestos Detected
041621TP19	Gypsum with No Mud	T-Building 3	No Asbestos Detected
041621TP20	Gypsum with No Mud	T-Building 3	No Asbestos Detected



Sample Number	Material Description	Sample Location	Result
041621TP21	Gypsum with No Mud	T-Building 3	No Asbestos Detected
041621TP22	12" White with Gray Specks Flooring	T-Building 4	No Asbestos Detected
041621TP23	12" White with Gray Specks Flooring	T-Building 4	No Asbestos Detected
041621TP24	12" White with Gray Specks Flooring	T-Building 4	No Asbestos Detected
041621TP25	Light Brown Vinyl Base	T-Building 4	No Asbestos Detected
041621TP26	Light Brown Vinyl Base	T-Building 4	No Asbestos Detected
041621TP27	Light Brown Vinyl Base	T-Building 4	No Asbestos Detected
041621TP28	Gypsum with No Mud	T-Building 5	No Asbestos Detected
041621TP29	Gypsum with No Mud	T-Building 5	No Asbestos Detected
041621TP30	Gypsum with No Mud	T-Building 5	No Asbestos Detected
041621TP31	12" White Under Carpet Flooring	T-Building 5	No Asbestos Detected
041621TP32	12" White Under Carpet Flooring	T-Building 5	No Asbestos Detected
041621TP33	12" White Under Carpet Flooring	T-Building 5	No Asbestos Detected
041621TP34	Gray Vinyl Base	T-Building 5	No Asbestos Detected
041621TP35	Gray Vinyl Base	T-Building 5	No Asbestos Detected
041621TP36	Gray Vinyl Base	T-Building 5	No Asbestos Detected



Customer PO: Project ID:

Fax:

Attention: Chris White Phone: (225) 445-6626

Wynn L. White Consulting Engineers, Inc.

PO Box 83527 Received Date: 04/19/2021 8:30 AM

Baton Rouge, LA 70884-3527 Analysis Date: 04/19/2021


Collected Date: 04/16/2021

Project: 20046 Assessment Building

Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

			Non-Asbest	os .	<u>Asbestos</u>
Sample	Description	Appearance	% Fibrous	% Non-Fibrous	% Type
041621TP4-Wrap		White Non-Fibrous	10% Wollastonite	90% Non-fibrous (Other)	None Detected
252101760-0001		Homogeneous			
041621TP4-Insulation		Yellow Fibrous	98% Glass	2% Non-fibrous (Other)	None Detected
252101760-0001A		Homogeneous			
041621TP5-Wrap		White Non-Fibrous	10% Wollastonite	90% Non-fibrous (Other)	None Detected
252101760-0002		Homogeneous			
041621TP5-Insulation		Yellow Fibrous	98% Glass	2% Non-fibrous (Other)	None Detected
252101760-0002A		Homogeneous			
041621TP6-Wrap		White Non-Fibrous	10% Wollastonite	90% Non-fibrous (Other)	None Detected
252101760-0003		Homogeneous			
041621TP6-Insulation		Yellow Fibrous	98% Glass	2% Non-fibrous (Other)	None Detected
252101760-0003A		Homogeneous			
041621TP7		White Non-Fibrous		100% Non-fibrous (Other)	None Detected
252101760-0004		Homogeneous			
041621TP8-Floor Tile		White Non-Fibrous		100% Non-fibrous (Other)	None Detected
252101760-0005		Homogeneous			
041621TP8-Adhesive		Yellow Non-Fibrous		100% Non-fibrous (Other)	None Detected
252101760-0005A		Homogeneous			
041621TP9-Floor Tile		White Non-Fibrous		100% Non-fibrous (Other)	None Detected
252101760-0006		Homogeneous			
041621TP9-Adhesive		Yellow Non-Fibrous		100% Non-fibrous (Other)	None Detected
252101760-0006A		Homogeneous			
041621TP10		Tan Fibrous	50% Cellulose 5% Glass	45% Non-fibrous (Other)	None Detected
252101760-0007		Homogeneous			
041621TP11		Tan Fibrous	50% Cellulose 5% Glass	45% Non-fibrous (Other)	None Detected
252101760-0008		Homogeneous			
041621TP12		Tan Fibrous	50% Cellulose 5% Glass	45% Non-fibrous (Other)	None Detected
252101760-0009		Homogeneous			
041621TP13-Floor Tile	e	Gray Non-Fibrous		100% Non-fibrous (Other)	None Detected
252101760-0010		Homogeneous			
041621TP13-Adhesive	e	Yellow Non-Fibrous		100% Non-fibrous (Other)	None Detected
252101760-0010A		Homogeneous			

Initial report from: 04/19/2021 15:48:54



Customer PO: Project ID:

Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

			Non-Asbes	etos .	Asbestos
Sample	Description	Appearance	% Fibrous	% Non-Fibrous	% Type
041621TP14-Floor ⁻	Tile	Gray Non-Fibrous		100% Non-fibrous (Other)	None Detected
041621TP14-Adhes	sive	Homogeneous Yellow		100% Non-fibrous (Other)	None Detected
252101760-0011A		Non-Fibrous Homogeneous			
)41621TP15-Floor	Tile	Gray Non-Fibrous		100% Non-fibrous (Other)	None Detected
52101760-0012		Homogeneous			
041621TP15-Adhes	sive	Yellow Non-Fibrous		100% Non-fibrous (Other)	None Detected
252101760-0012A		Homogeneous			
041621TP16		Tan Fibrous	45% Cellulose 15% Glass	40% Non-fibrous (Other)	None Detected
52101760-0013		Homogeneous	450/ Callulana	450/ Non-Shanna (Othor)	Nana Datastad
041621TP17 252101760-0014		Tan Fibrous Homogeneous	45% Cellulose 10% Glass	45% Non-fibrous (Other)	None Detected
941621TP18		Tan	45% Cellulose	45% Non-fibrous (Other)	None Detected
410211110		Fibrous	10% Glass	10 / 11011 1101000 (0 11101)	20.00.00
52101760-0015		Homogeneous			
41621TP19-Wallpa	aper	Gray Non-Fibrous	40% Cellulose	60% Non-fibrous (Other)	None Detected
52101760-0016		Homogeneous	50/ 01	052/ N 51 (Q1)	N D ()
141621TP19-Drywa	all	Pink Non-Fibrous	5% Glass	95% Non-fibrous (Other)	None Detected
52101760-0016A		Homogeneous	400/ 0. 11 1	2007 N 51 (OII)	N D ()
141621TP20-Wallpa 52101760-0017	aper	Gray Non-Fibrous Homogeneous	40% Cellulose	60% Non-fibrous (Other)	None Detected
	SII	Pink	5% Glass	95% Non fibrous (Other)	None Detected
41621TP20-Drywa 52101760-0017A	all	Non-Fibrous Homogeneous	5% Glass	95% Non-fibrous (Other)	None Detected
41621TP21		Pink	5% Glass	95% Non-fibrous (Other)	None Detected
52101760-0018		Non-Fibrous Homogeneous		,	
)41621TP22-Floor	Tile	Gray Non-Fibrous		100% Non-fibrous (Other)	None Detected
52101760-0019		Homogeneous			
41621TP22-Adhes	sive	Yellow Non-Fibrous		100% Non-fibrous (Other)	None Detected
52101760-0019A		Homogeneous			
41621TP23-Floor	Tile	Gray Non-Fibrous		100% Non-fibrous (Other)	None Detected
52101760-0020		Homogeneous			
941621TP23-Adhes	sive	Yellow Non-Fibrous		100% Non-fibrous (Other)	None Detected
252101760-0020A	T1.	Homogeneous		4000/ Nov. 51 (011)	News D. C. C.
041621TP24-Floor	Tile	Gray Non-Fibrous		100% Non-fibrous (Other)	None Detected
252101760-0021	nivo.	Homogeneous Yellow		100% Non-fibrous (Other)	None Detected
041621TP24-Adhes 252101760-0021A	ove.	Non-Fibrous Homogeneous		100% Non-librous (Other)	None Detected
					

Initial report from: 04/19/2021 15:48:54



Customer PO: Project ID:

Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

			Non-Asbe	<u>stos</u>	<u>Asbestos</u>
Sample	Description	Appearance	% Fibrous	% Non-Fibrous	% Type
041621TP25-Cove		Black		100% Non-fibrous (Other)	None Detected
Base		Non-Fibrous Homogeneous			
252101760-0022					
041621TP25-Adhesive	:	Tan Non-Fibrous		100% Non-fibrous (Other)	None Detected
252101760-0022A		Homogeneous			
041621TP26-Cove		Black		100% Non-fibrous (Other)	None Detected
Base		Non-Fibrous Homogeneous			
252101760-0023					
041621TP26-Adhesive	•	Tan		100% Non-fibrous (Other)	None Detected
252101760-0023A		Non-Fibrous Homogeneous			
041621TP27-Cove		Black		100% Non-fibrous (Other)	None Detected
Base		Non-Fibrous		, ,	
252101760-0024		Homogeneous			
041621TP27-Adhesive		Tan		100% Non-fibrous (Other)	None Detected
252101760-0024A		Non-Fibrous			
041621TP28		Homogeneous White	5% Cellulose	95% Non-fibrous (Other)	None Detected
0410211720		Non-Fibrous	370 Cellulose	93 / Non-Ibrous (Cuter)	None Detected
252101760-0025		Homogeneous			
041621TP29		White Non-Fibrous	5% Cellulose	95% Non-fibrous (Other)	None Detected
252101760-0026		Homogeneous			
041621TP30		White	5% Cellulose	95% Non-fibrous (Other)	None Detected
252101760-0027		Non-Fibrous Homogeneous			
041621TP31-Glue		Yellow		100% Non-fibrous (Other)	None Detected
		Non-Fibrous		,	
252101760-0028		Homogeneous White		4000/ Non Sharana (Others)	None Detected
041621TP31-Floor Tile	:	Non-Fibrous		100% Non-fibrous (Other)	None Detected
252101760-0028A		Homogeneous			
041621TP31-Adhesive	•	Yellow Non-Fibrous		100% Non-fibrous (Other)	None Detected
252101760-0028B		Homogeneous			
041621TP32-Glue		Yellow		100% Non-fibrous (Other)	None Detected
252101760-0029		Non-Fibrous Homogeneous			
041621TP32-Floor Tile	1	White		100% Non-fibrous (Other)	None Detected
		Non-Fibrous		,	
252101760-0029A		Homogeneous		1000(1) 51 (01)	N. D. I.
041621TP32-Adhesive		Yellow Non-Fibrous		100% Non-fibrous (Other)	None Detected
252101760-0029B		Homogeneous			
041621TP33-Glue		Yellow Non-Fibrous		100% Non-fibrous (Other)	None Detected
252101760-0030		Homogeneous			
041621TP33-Floor Tile	:	White		100% Non-fibrous (Other)	None Detected
252101760 00204		Non-Fibrous			
252101760-0030A 041621TP33-Adhesive		Homogeneous Yellow		100% Non-fibrous (Other)	None Detected
U-10211F33-Aunesive	;	Non-Fibrous		100 /0 NOTI-HUIOUS (OTHEL)	None Delected
252101760-0030B		Homogeneous			

Initial report from: 04/19/2021 15:48:54



Customer PO: Project ID:

Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

			Non-A	sbestos	<u>Asbestos</u>
Sample	Description	Appearance	% Fibrous	% Non-Fibrous	% Type
041621TP34-Cove		Gray		100% Non-fibrous (Other)	None Detected
Base		Non-Fibrous			
		Homogeneous			
252101760-0031					
041621TP34-Adhesive		Yellow		100% Non-fibrous (Other)	None Detected
		Non-Fibrous			
252101760-0031A		Homogeneous			
041621TP35-Cove		Gray		100% Non-fibrous (Other)	None Detected
Base		Non-Fibrous			
		Homogeneous			
252101760-0032					
041621TP35-Adhesive		Yellow		100% Non-fibrous (Other)	None Detected
		Non-Fibrous			
252101760-0032A		Homogeneous			
041621TP36-Cove		Gray		100% Non-fibrous (Other)	None Detected
Base		Non-Fibrous		,	
		Homogeneous			
252101760-0033		-			
041621TP36-Adhesive		Yellow		100% Non-fibrous (Other)	None Detected
		Non-Fibrous			
252101760-0033A		Homogeneous			

Analyst(s)
Tyler Pullig (58)

Jamie Laginess, Laboratory Operations Manager or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis . Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Baton Rouge, LA NVLAP Lab Code 200375-0, LELAP 01950, TX 300238



For Office Use Only:					
Project Mgr:		İ			
Accounting:					
Project File:					

CHAIN OF CUSTODY

PROJECT DATA	SHIPPING DATA		LABORATORY		
Project No.(s):	Samples Shipped via:		Name: EMSL Analytical, Inc.		
20046	Hand		Address:	18369 Petroleum Drive	
Asserver & Building					
Samples Collected by:	Date Relinquished to Shipper:	:	City, State, Zip	Baton Rouge, LA 70809	
Tollaton	N/A		Samples Rec'd	by: Librar	
				Signature	
Date: 04-16-21			Date Received:	4/19/11 @8:30am	
	SAMPLE IDI	ENTIFICATIO)N		
04/671 TP4-6					
041621707-9					
041621TP10-12	<u> </u>				
0416217813-15					
0416217816-18					
041621TP19-21					
041621TP22-24					
0416217825-27					
041621TP28-30					
O416217 31-37		<u></u>			
0416217034-36					
		<u> </u>			
		T			
,				_	
		T			
]			
		T =			
	SPECIAL CONDITION	NS OR COM	IMENTS		
Analysis:	TEM 7082 Lead	d	Mold	Air-O-Cell	
	PCM TCLP Me	tals	Mold	Agar Plate or Rodac Plate	
	PLM Other: —		. Mold	Bulk or Swab	
Requested Turnaround:	7 Day (KA) 🔀	24 Hour		Other	
	3 Day	Same Day			
	6-10 Day	24-48 Hour			
Total Number of Samples:	73				
Comments/Instructions:	Positive stop grafs of	three			
	- 0 0				
	white@wynnwhite com AND				
	Iwhite@wynnwhite.com Hetwer	yorwhile.	con	Post Office Box 83527	
OrcoBox	Ĩ	1	E	Baton Rouge, LA 70884-3527	

Drep By Environmental Engineers Post Office Box 83527 Baton Rouge, LA 70884-3527 Voice Mail (225) 761-9141 Fax No. (225) 761-4450



Customer PO: Project ID:

Attention: Chris White **Phone:** (225) 445-6626

Wynn L. White Consulting Engineers, Inc. Fax:

PO Box 83527 Received Date: 04/21/2021 4:05 PM

Baton Rouge, LA 70884-3527 **Analysis Date:** 04/22/2021 Collected Date: 04/20/2021

Project: 20046 Asses. Building

Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized **Light Microscopy**

			Non-Asbestos				
Sample	Description	Appearance	% Fibrous	% Non-Fibrous	% Type		
042021BW1-Caulk		White Non-Fibrous		100% Non-fibrous (Other)	None Detected		
252101831-0001		Homogeneous					
042021BW1-Caulk 2		Clear Non-Fibrous		100% Non-fibrous (Other)	None Detected		
252101831-0001A		Homogeneous					
042021BW2		Clear Non-Fibrous		100% Non-fibrous (Other)	None Detected		
252101831-0002		Homogeneous					
042021BW3		Clear Non-Fibrous		100% Non-fibrous (Other)	None Detected		
252101831-0003		Homogeneous					
042021BW4-Caulk		Clear Non-Fibrous		100% Non-fibrous (Other)	None Detected		
252101831-0004		Homogeneous					
042021BW4-Caulk 2		Brown Non-Fibrous		100% Non-fibrous (Other)	None Detected		
252101831-0004A		Homogeneous					
042021BW5-Caulk		Clear Non-Fibrous		100% Non-fibrous (Other)	None Detected		
252101831-0005		Homogeneous					
042021BW5-Caulk 2		Brown Non-Fibrous		100% Non-fibrous (Other)	None Detected		
252101831-0005A		Homogeneous					
042021BW6-Caulk		Clear Non-Fibrous		100% Non-fibrous (Other)	None Detected		
252101831-0006		Homogeneous					
042021BW6-Caulk 2		Brown Non-Fibrous		100% Non-fibrous (Other)	None Detected		
252101831-0006A		Homogeneous					

Analyst(s)	Jamie Laginess
Jurnee West (10)	Jamie Laginess, Laboratory Operations Mana
	or Other Approved Cignotons

or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Baton Rouge, LA NVLAP Lab Code 200375-0, LELAP 01950, TX 300238

Initial report from: 04/22/2021 14:04:04



	For	Office	Use Only:	
	Project Mgr:			_
`	Accounting:			
1	Project File:			

CHAIN OF CUSTODY

				LABORATORY/	
PROJECT DATA	SHIPPIN		LABORATORY		
Project No.(s):	Samples Shipped via		Name: EMSL Analytical, Inc.		
20046	Ha	nd	Address:	18369 Petroleum Drive	
ASSES. Building			1		
Samples Collected by:	Date Relinquished to	Shipper:		Baton Rouge, LA 70809	
Bakari Weiss	N/A		Samples Rec'd	by: Likhah	
				Signature	
Date: 4-20 - みし			Date Received:	4/21/21 A4:05pm	
	SAI	WPLE IDENTIFICATIO	N	(/	
042021BW1					
0420 21 BWZ					
042021BW3					
04202(BW4					
042021 Bu 5					
042021BW6					
8					
	·		-		
				ر تيبت	
		1			
					
					
		1			
			_		
1					
	 				
	SPECIAL C	ONDITIONS OR COM	IMENTS		
Analysis:		7082 Lead		Air-O-Cell	
		TCLP Metals		Agar Plate or Rodac Plate	
		Other:		Bulk or Swab	
···	<u> </u>		·		
Requested Turnaround:	7 Day (5	24 Hour		Other	
apara a superior and the superior and th	3 Day	Same Day			
<u> </u>	6-10 Day	24-48 Hour			
Total Number of Samples:	<u> </u>	:			
Comments/Instructions:					
				· · · · · · · · · · · · · · · · · · ·	
SEND RESULTS TO:	:white@wynnwhite.com AND		T		
	lwhite@wynnwhite.com 60	veiss@wynnwhith	e, com	Post Office Box 83527	
	(B) at	veiss@wynawhith 160 5919 9681	, B	aton Rouge, LA 70884-3527	
	<i>もしょし</i>	'UU 0717 76X/	0	Voice Mail (225) 764 0144	

Environmental Engineers

Voice Mail (225) 761-9141 Fax No. (225) 761-4450



Signal Restoration Services Calcasieu Parish School Board

Asbestos Inspection Executive Summary

Site Name	Assessment Building
Inspection Date	10 September 2020
Signal Project #	

A Limited Asbestos Survey was performed by Ensolum, LLC following US Environmental Protection Agency (EPA) 40 CFR Part 763 Subpart E Asbestos Hazard Emergency Response Act (AHERA) requirements. Samples of representative building materials potentially involved in remediation and mitigation activities were collected by Louisiana Department of Environmental Quality (LDEQ)-accredited asbestos inspectors.

Samples were analyzed by Eurofins J3 Resources in Houston, Texas. Eurofins J3 is NVLAP (NVLAP Lab Code 200525-0) and AIHA Accredited for asbestos analysis. The samples were analyzed using the Polarized Light Microscopy (PLM) EPA 600/R-93/116 Method.

Results of the PLM analysis indicate the following asbestos-containing materials:

Sample #	Sample Description	Sample Location	Friable	Results
6,7,8,9,10,11,12	White w/tan vinyl floor tile w/black mastic	Rest. Office entry, Rm. 121, Assessment entry, Supply room entry, Rm. 120 entry, Rm 117, Rm 111 hallway	No	Tile: 2% Chrysotile Black Mastic: 5% Chrysotile
13,14,15	Tan w/white floor tile w/black mastic	N. Hall, E. entry, W. hall	No	Tile: 2% Chrysotile Black Mastic: 5% Chrysotile
19,20,21	Light tan w/white vinyl sheet floor	N. entry restroom	No	Black Mastic 5% Chrysotile

ENSOLUM

Sample #	Sample Description	Sample Location	Friable	Results
26	Gray w/tan vinyl FT w/black mastic	Cont. room, Rm. 111,112,114,116,N. Cont. room	No	Black Mastic 5% Chrysotile
36,37,38	Blue FT w/black mastic	Early childhood hallway, E. entry	No	Black mastic 3% Chrysotile
48	Gray carpet w/black mastic	Rm. 105,103 office, 104	No	Black mastic 2% Chrysotile
50,51,52	Brown carpet w/black mastic	Rm. 104	No	Black mastic 2% Chrysotile

ENSOLUM

AHERA Regulations require that any materials with asbestos content greater than one (1) percent asbestos content be removed by a Louisiana-licensed Asbestos Abatement Contractor prior to any renovation or demolition activities. Based on analysis of the samples collected during this survey, the following conclusions and recommendations are provided:

- Mechanical disturbance of the floor tiles causing access to the asbestos
 containing mastic beneath may cause the non-friable asbestos in the mastic to
 become friable and possibly airborne. Therefore, tiles should be left in place. If
 tiles become loose during mitigation activities, this area should promptly be
 covered using 2 layers of polyethylene sheeting or another barrier.
- Although some of the floor tile was not analyzed to contain asbestos, the floor tiles with asbestos-containing mastic should also be considered asbestos containing as the tiles will be cross-contaminated with the positive asbestoscontaining black mastic and therefore it is not possible to separate the two materials.
- The materials are currently in a non-friable condition and may be left in place during drying and implementation of environmental controls.
- The area should be isolated and traffic/disturbance in this are kept to a minimum.
- Should the drying process or renovation activities require disturbance of these asbestos containing materials, a Louisiana Licensed Asbestos Abatement Contractor should remove them prior to renovation activities.

Robert W. Storment, CIH, CHMM LDEQ Inspector FI094801

Lalun W Jar.

LDEQ Project Designer JD094801



Bulk Asbestos Fiber Analysis by Polarized Light Microscopy (PLM) Appx E Sub E 40 CFR 763 / EPA 600/R-93/116

 Robert Storment
 J3 Order #:
 JH20121716

 Ensolum, LLC
 Project #:
 02A1648001.024

 2351 W. Northwest Hwy. Suite 1203
 Date Received:
 10-Sep-2020

 Dallas TX 75220
 Date Reported:
 10-Sep-2020

Signal-CPSB - Assessment Building

Sample ID #	Sample Description	Asbestos Constituen	ts	Non-Asbestos Constituents	
1	Ceiling Tile, White/ Gray, Homogeneous	None Detected		Cellulose Fiber Mineral Wool Non-Fibrous Material	50% 30%
				Non-Fibrous Material	20%
2	Ceiling Tile, White/ Gray, Homogeneous	None Detected		Cellulose Fiber Mineral Wool	50% 30%
				Non-Fibrous Material	20%
3	Ceiling Tile, White/ Gray, Homogeneous	None Detected		Cellulose Fiber Mineral Wool	50% 30%
				Non-Fibrous Material	20%
4	Ceiling Tile, White/ Gray, Homogeneous	None Detected		Cellulose Fiber Mineral Wool	50% 30%
				Non-Fibrous Material	20%
5	Ceiling Tile, White/ Gray, Homogeneous	None Detected		Cellulose Fiber Mineral Wool	50% 30%
				Non-Fibrous Material	20%
6	LAYER 1 Floor Tile, Off White, Homogeneous	Chrysotile	2%	Non-Fibrous Material	98%
	LAYER 2 Mastic, Black, Homogeneous	Chrysotile	5%	Non-Fibrous Material	95%
7	LAYER 1 Floor Tile, Off White, Homogeneous	Chrysotile	2%	Non-Fibrous Material	98%
	LAYER 2 Mastic, Black, Homogeneous	Chrysotile	5%	Non-Fibrous Material	95%

Anh Phung Analyst

Scott Ward, Ph.D. Lab Director

This report relates only to the materials tested. This report is for the exclusive use of the addressed client and shall not be reproduced except in full, without written approval by J3 Resources, Inc. (J3). Samples are analyzed according to the methods listed above and are subject to the inherent limitations of PLM and interference of matrix components. Reporting limit for the above method is a function of the quantity of sample analyzed, matrix interference, sample preparation, fiber size, and distribution. Asbestos may be detected in concentrations of <1% by area if sufficient material is analyzed. J3 recommends TEM confirmation of soils, vermiculite and non-friable organically bound materials (NOB) reported as None Detected or < 1% Asbestos by PLM. All samples received in good condition unless otherwise noted. This report shall not be used to claim product approval, certification, or endorsement by NVLAP, NIST, or any agency of the federal government.

NVLAP Lab Code: 200525-0 TDSHS License: 30-0273 Page 1 of 12



Bulk Asbestos Fiber Analysis by Polarized Light Microscopy (PLM) Appx E Sub E 40 CFR 763 / EPA 600/R-93/116

 Robert Storment
 J3 Order #:
 JH20121716

 Ensolum, LLC
 Project #:
 02A1648001.024

 2351 W. Northwest Hwy. Suite 1203
 Date Received:
 10-Sep-2020

 Dallas TX 75220
 Date Reported:
 10-Sep-2020

Signal-CPSB - Assessment Building

Sample ID #	Sample Description LAYER 1 Floor Tile, Off White, Homogeneous	Asbestos Constituents		Non-Asbestos Constituents	
8		Chrysotile	2%	Non-Fibrous Material	98%
	LAYER 2 Mastic, Black, Homogeneous	Chrysotile	5%	Non-Fibrous Material	95%
9	LAYER 1 Floor Tile, Off White, Homogeneous	Chrysotile	2%	Non-Fibrous Material	98%
	LAYER 2 Mastic, Black, Homogeneous	Chrysotile	5%	Non-Fibrous Material	95%
10	LAYER 1 Floor Tile, Off White, Homogeneous	Chrysotile	2%	Non-Fibrous Material	98%
	LAYER 2 Mastic, Black, Homogeneous	Chrysotile	5%	Non-Fibrous Material	95%
11	LAYER 1 Floor Tile, Off White, Homogeneous	Chrysotile	2%	Non-Fibrous Material	98%
	LAYER 2 Mastic, Black, Homogeneous	Chrysotile	5%	Non-Fibrous Material	95%
12	LAYER 1 Floor Tile, Off White, Homogeneous	Chrysotile	2%	Non-Fibrous Material	98%
	LAYER 2 Mastic, Black, Homogeneous	Chrysotile	5%	Non-Fibrous Material	95%
13	LAYER 1 Floor Tile, Tan, Homogeneous	Chrysotile	2%	Non-Fibrous Material	98%
	LAYER 2 Mastic, Black, Homogeneous	Chrysotile	5%	Non-Fibrous Material	95%
14	LAYER 1 Floor Tile, Tan, Homogeneous	Chrysotile	2%	Non-Fibrous Material	98%
	LAYER 2 Mastic, Black, Homogeneous	Chrysotile	5%	Non-Fibrous Material	95%

Anh Phung Analyst

Scott Ward, Ph.D. Lab Director

This report relates only to the materials tested. This report is for the exclusive use of the addressed client and shall not be reproduced except in full, without written approval by J3 Resources, Inc. (J3). Samples are analyzed according to the methods listed above and are subject to the inherent limitations of PLM and interference of matrix components. Reporting limit for the above method is a function of the quantity of sample analyzed, matrix interference, sample preparation, fiber size, and distribution. Asbestos may be detected in concentrations of <1% by area if sufficient material is analyzed. J3 recommends TEM confirmation of soils, vermiculite and non-friable organically bound materials (NOB) reported as None Detected or < 1% Asbestos by PLM. All samples received in good condition unless otherwise noted. This report shall not be used to claim product approval, certification, or endorsement by NVLAP, NIST, or any agency of the federal government.

NVLAP Lab Code: 200525-0 TDSHS License: 30-0273 Page 2 of 12



Bulk Asbestos Fiber Analysis by Polarized Light Microscopy (PLM) Appx E Sub E 40 CFR 763 / EPA 600/R-93/116

 Robert Storment
 J3 Order #:
 JH20121716

 Ensolum, LLC
 Project #:
 02A1648001.024

 2351 W. Northwest Hwy. Suite 1203
 Date Received:
 10-Sep-2020

 Dallas TX 75220
 Date Reported:
 10-Sep-2020

Signal-CPSB - Assessment Building

Sample ID #	Sample Description	Asbestos Constituents	5	Non-Asbestos Constituents	
15	LAYER 1 Floor Tile, Tan, Homogeneous	Chrysotile	2%	Non-Fibrous Material	98%
	LAYER 2 Mastic, Black, Homogeneous	Chrysotile	5%	Non-Fibrous Material	95%
16	Ceiling Tile, White/ Beige, Homogeneous	None Detected		Cellulose Fiber Mineral Wool Non-Fibrous Material	60% 20% 20%
17	Ceiling Tile, White/ Beige, Homogeneous	None Detected		Cellulose Fiber Mineral Wool Non-Fibrous Material	60% 20% 20%
18	Ceiling Tile, White/ Beige, Homogeneous	None Detected		Cellulose Fiber Mineral Wool Non-Fibrous Material	60% 20% 20%
19	LAYER 1 Sheet Flooring, Beige/ Tan, Homogeneous LAYER 2 Mastic, Yellow, Homogeneous	Chrysotile None Detected	15%	Non-Fibrous Material Non-Fibrous Material	85%
20	LAYER 1 Sheet Flooring, Beige/ Tan, Homogeneous	Chrysotile	15%	Non-Fibrous Material	85%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected		Non-Fibrous Material	100%

Anh Phung Analyst

This report relates only to the materials tested. This report is for the exclusive use of the addressed client and shall not be reproduced except in full, without written approval by J3 Resources, Inc. (J3). Samples are analyzed according to the methods listed above and are subject to the inherent limitations of PLM and interference of matrix components. Reporting limit for the above method is a function of the quantity of sample analyzed, matrix interference, sample preparation, fiber size, and distribution. Asbestos may be detected in concentrations of <1% by area if sufficient material is analyzed. J3 recommends TEM confirmation of soils, vermiculite and non-friable organically bound materials (NOB) reported as None Detected or < 1% Asbestos by PLM. All samples received in good condition unless otherwise noted. This report shall not be used to claim product approval, certification, or endorsement by NVLAP, NIST, or any agency of the federal government.

NVLAP Lab Code: 200525-0 TDSHS License: 30-0273 Page 3 of 12

Scott Wārd, Ph.D.

Lab Director



Bulk Asbestos Fiber Analysis by Polarized Light Microscopy (PLM) Appx E Sub E 40 CFR 763 / EPA 600/R-93/116

 Robert Storment
 J3 Order #:
 JH20121716

 Ensolum, LLC
 Project #:
 02A1648001.024

 2351 W. Northwest Hwy. Suite 1203
 Date Received:
 10-Sep-2020

 Dallas TX 75220
 Date Reported:
 10-Sep-2020

Signal-CPSB - Assessment Building

Sample ID #	Sample Description	Asbestos Constituents	Non-Asbestos Constituents	
21	LAYER 1 Sheet Flooring, Beige/ Tan, Homogeneous	Chrysotile 15%	Non-Fibrous Material	85%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
22	LAYER 1 Floor Tile, Gray, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 2 Mastic, Clear, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 3	None Detected	Cellulose Fiber	5%
	Leveling Compound, Gray, Homogeneous		Non-Fibrous Material	95%
	LAYER 4 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
23	LAYER 1 Floor Tile, Gray, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 2 Mastic, Brown, Homogeneous	None Detected	Non-Fibrous Material	100%
24	LAYER 1 Floor Tile, Gray, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 2 Mastic, Clear, Homogeneous	None Detected	Non-Fibrous Material	100%
25	LAYER 1 Floor Tile, Gray, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 2 Mastic, Clear/ Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 3 Leveling Compound, Gray, Homogeneous	None Detected	Cellulose Fiber Non-Fibrous Material	5% 95%

Anh Phung Analyst

Scott Ward, Ph.D. Lab Director

This report relates only to the materials tested. This report is for the exclusive use of the addressed client and shall not be reproduced except in full, without written approval by J3 Resources, Inc. (J3). Samples are analyzed according to the methods listed above and are subject to the inherent limitations of PLM and interference of matrix components. Reporting limit for the above method is a function of the quantity of sample analyzed, matrix interference, sample preparation, fiber size, and distribution. Asbestos may be detected in concentrations of <1% by area if sufficient material is analyzed. J3 recommends TEM confirmation of soils, vermiculite and non-friable organically bound materials (NOB) reported as None Detected or < 1% Asbestos by PLM. All samples received in good condition unless otherwise noted. This report shall not be used to claim product approval, certification, or endorsement by NVLAP, NIST, or any agency of the federal government.

NVLAP Lab Code: 200525-0 TDSHS License: 30-0273 Page 4 of 12



Bulk Asbestos Fiber Analysis by Polarized Light Microscopy (PLM) Appx E Sub E 40 CFR 763 / EPA 600/R-93/116

 Robert Storment
 J3 Order #:
 JH20121716

 Ensolum, LLC
 Project #:
 02A1648001.024

 2351 W. Northwest Hwy. Suite 1203
 Date Received:
 10-Sep-2020

 Dallas TX 75220
 Date Reported:
 10-Sep-2020

Signal-CPSB - Assessment Building

Sample ID #	Sample Description	Asbestos Constituents	Non-Asbestos Constituents	
26	LAYER 1 Floor Tile, Gray, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 2 Mastic, Clear/ Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 3 Leveling Compound, Gray, Homogeneous	None Detected	Cellulose Fiber Non-Fibrous Material	5% 95%
	LAYER 4 Mastic, Black, Homogeneous	Chrysotile 5%	Non-Fibrous Material	95%
27	LAYER 1 Floor Tile, Gray, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 2 Mastic, Clear, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 3 Leveling Compound, Gray, Homogeneous	None Detected	Cellulose Fiber Non-Fibrous Material	5% 95%
	LAYER 4 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
28	LAYER 1 Floor Tile, Gray, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 2 Mastic, Clear, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 3 Leveling Compound, Gray, Homogeneous	None Detected	Cellulose Fiber Non-Fibrous Material	5% 95%
	LAYER 4 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
29	LAYER 1 Cove Base, Black, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 2 Mastic, Beige, Homogeneous	None Detected	Non-Fibrous Material	100%

Anh Phung Analyst

Scott Ward, Ph.D. Lab Director

This report relates only to the materials tested. This report is for the exclusive use of the addressed client and shall not be reproduced except in full, without written approval by J3 Resources, Inc. (J3). Samples are analyzed according to the methods listed above and are subject to the inherent limitations of PLM and interference of matrix components. Reporting limit for the above method is a function of the quantity of sample analyzed, matrix interference, sample preparation, fiber size, and distribution. Asbestos may be detected in concentrations of <1% by area if sufficient material is analyzed. J3 recommends TEM confirmation of soils, vermiculite and non-friable organically bound materials (NOB) reported as None Detected or < 1% Asbestos by PLM. All samples received in good condition unless otherwise noted. This report shall not be used to claim product approval, certification, or endorsement by NVLAP, NIST, or any agency of the federal government.

NVLAP Lab Code: 200525-0 TDSHS License: 30-0273 Page 5 of 12



Bulk Asbestos Fiber Analysis by Polarized Light Microscopy (PLM) Appx E Sub E 40 CFR 763 / EPA 600/R-93/116

 Robert Storment
 J3 Order #:
 JH20121716

 Ensolum, LLC
 Project #:
 02A1648001.024

 2351 W. Northwest Hwy. Suite 1203
 Date Received:
 10-Sep-2020

 Dallas TX 75220
 Date Reported:
 10-Sep-2020

Signal-CPSB - Assessment Building

Sample ID #	Sample Description	Asbestos Constituents	6	Non-Asbestos Constituents	
30	LAYER 1 Cove Base, Black, Homogeneous	None Detected		Non-Fibrous Material	100%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected		Non-Fibrous Material	100%
31	LAYER 1 Cove Base, Black, Homogeneous	None Detected		Non-Fibrous Material	100%
	LAYER 2 Mastic, Tan, Homogeneous	None Detected		Non-Fibrous Material	100%
32	LAYER 1 Cove Base, Green, Homogeneous	None Detected		Non-Fibrous Material	100%
	LAYER 2 Mastic, Tan, Homogeneous	None Detected		Non-Fibrous Material	100%
33	LAYER 1 Cove Base, Brown, Homogeneous	None Detected		Non-Fibrous Material	100%
	LAYER 2 Mastic, Tan, Homogeneous	None Detected		Non-Fibrous Material	100%
34	LAYER 1 Cove Base, Brown, Homogeneous	None Detected		Non-Fibrous Material	100%
	LAYER 2 Mastic, Tan, Homogeneous	None Detected		Non-Fibrous Material	100%
35	LAYER 1 Cove Base, Brown, Homogeneous	None Detected		Non-Fibrous Material	100%
	LAYER 2 Mastic, Tan, Homogeneous	None Detected		Non-Fibrous Material	100%
36	LAYER 1 Floor Tile, Blue, Homogeneous	None Detected		Non-Fibrous Material	100%
	LAYER 2 Mastic, Black, Homogeneous	Chrysotile	3%	Non-Fibrous Material	97%

Anh Phung Analyst

Scott Ward, Ph.D. Lab Director

This report relates only to the materials tested. This report is for the exclusive use of the addressed client and shall not be reproduced except in full, without written approval by J3 Resources, Inc. (J3). Samples are analyzed according to the methods listed above and are subject to the inherent limitations of PLM and interference of matrix components. Reporting limit for the above method is a function of the quantity of sample analyzed, matrix interference, sample preparation, fiber size, and distribution. Asbestos may be detected in concentrations of <1% by area if sufficient material is analyzed. J3 recommends TEM confirmation of soils, vermiculite and non-friable organically bound materials (NOB) reported as None Detected or < 1% Asbestos by PLM. All samples received in good condition unless otherwise noted. This report shall not be used to claim product approval, certification, or endorsement by NVLAP, NIST, or any agency of the federal government.

NVLAP Lab Code: 200525-0 TDSHS License: 30-0273 Page 6 of 12



Bulk Asbestos Fiber Analysis by Polarized Light Microscopy (PLM) Appx E Sub E 40 CFR 763 / EPA 600/R-93/116

 Robert Storment
 J3 Order #:
 JH20121716

 Ensolum, LLC
 Project #:
 02A1648001.024

 2351 W. Northwest Hwy. Suite 1203
 Date Received:
 10-Sep-2020

 Dallas TX 75220
 Date Reported:
 10-Sep-2020

Signal-CPSB - Assessment Building

Sample ID #	Sample Description	Asbestos Constituents	Non-Asbestos Constituents	
37	LAYER 1 Floor Tile, Blue, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 2 Mastic, Black, Homogeneous	Chrysotile 3%	Non-Fibrous Material	97%
38	LAYER 1 Floor Tile, Blue, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 3 Mastic, Black, Homogeneous	Chrysotile 3%	Non-Fibrous Material	97%
39	LAYER 1 Floor Tile, Cream, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 3 Leveling Compound, Gray, Homogeneous	None Detected	Cellulose Fiber Non-Fibrous Material	10% 90%
40	LAYER 1 Floor Tile, Cream, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 3 Leveling Compound, Gray, Homogeneous	None Detected	Cellulose Fiber Non-Fibrous Material	10% 90%

Anh Phung Analyst Scott Ward, Ph.D. Lab Director

This report relates only to the materials tested. This report is for the exclusive use of the addressed client and shall not be reproduced except in full, without written approval by J3 Resources, Inc. (J3). Samples are analyzed according to the methods listed above and are subject to the inherent limitations of PLM and interference of matrix components. Reporting limit for the above method is a function of the quantity of sample analyzed, matrix interference, sample preparation, fiber size, and distribution. Asbestos may be detected in concentrations of <1% by area if sufficient material is analyzed. J3 recommends TEM confirmation of soils, vermiculite and non-friable organically bound materials (NOB) reported as None Detected or < 1% Asbestos by PLM. All samples received in good condition unless otherwise noted. This report shall not be used to claim product approval, certification, or endorsement by NVLAP, NIST, or any agency of the federal government.

NVLAP Lab Code: 200525-0 TDSHS License: 30-0273 Page 7 of 12



Bulk Asbestos Fiber Analysis by Polarized Light Microscopy (PLM) Appx E Sub E 40 CFR 763 / EPA 600/R-93/116

 Robert Storment
 J3 Order #:
 JH20121716

 Ensolum, LLC
 Project #:
 02A1648001.024

 2351 W. Northwest Hwy. Suite 1203
 Date Received:
 10-Sep-2020

 Dallas TX 75220
 Date Reported:
 10-Sep-2020

Signal-CPSB - Assessment Building

Sample ID #	Sample Description	Asbestos Constituents	Non-Asbestos Constituents	
41	LAYER 1 Floor Tile, Beige, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 2 Mastic, Beige, Homogeneous	None Detected	Cellulose Fiber	100%
	LAYER 3 Leveling Compound, Gray, Homogeneous	None Detected	Cellulose Fiber Non-Fibrous Material	10% 90%
42	LAYER 1 Carpet, Blue, Homogeneous	None Detected	Synthetic Fiber Non-Fibrous Material	70% 30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
43	LAYER 1 Carpet, Blue, Homogeneous	None Detected	Synthetic Fiber Non-Fibrous Material	70% 30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
44	LAYER 1 Carpet, Blue, Homogeneous	None Detected	Synthetic Fiber Non-Fibrous Material	70% 30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
45	LAYER 1 Carpet, Gray, Homogeneous	None Detected	Synthetic Fiber Non-Fibrous Material	70% 30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%

Anh Phung Analyst

Scott Ward, Ph.D. Lab Director

This report relates only to the materials tested. This report is for the exclusive use of the addressed client and shall not be reproduced except in full, without written approval by J3 Resources, Inc. (J3). Samples are analyzed according to the methods listed above and are subject to the inherent limitations of PLM and interference of matrix components. Reporting limit for the above method is a function of the quantity of sample analyzed, matrix interference, sample preparation, fiber size, and distribution. Asbestos may be detected in concentrations of <1% by area if sufficient material is analyzed. J3 recommends TEM confirmation of soils, vermiculite and non-friable organically bound materials (NOB) reported as None Detected or < 1% Asbestos by PLM. All samples received in good condition unless otherwise noted. This report shall not be used to claim product approval, certification, or endorsement by NVLAP, NIST, or any agency of the federal government.

NVLAP Lab Code: 200525-0 TDSHS License: 30-0273 Page 8 of 12



Bulk Asbestos Fiber Analysis by Polarized Light Microscopy (PLM) Appx E Sub E 40 CFR 763 / EPA 600/R-93/116

 Robert Storment
 J3 Order #:
 JH20121716

 Ensolum, LLC
 Project #:
 02A1648001.024

 2351 W. Northwest Hwy. Suite 1203
 Date Received:
 10-Sep-2020

 Dallas TX 75220
 Date Reported:
 10-Sep-2020

Signal-CPSB - Assessment Building

Sample ID #	mple ID # Sample Description Constituents				
46	LAYER 1 Carpet, Gray, Homogeneous	None Detected		Synthetic Fiber Non-Fibrous Material	70% 30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected		Non-Fibrous Material	100%
47	LAYER 1 Carpet, Gray, Homogeneous	None Detected		Synthetic Fiber Non-Fibrous Material	70% 30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected		Non-Fibrous Material	100%
48	LAYER 1 Carpet, Gray, Homogeneous	None Detected		Synthetic Fiber Non-Fibrous Material	70% 30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected		Non-Fibrous Material	100%
	LAYER 3 Mastic, Black, Homogeneous	Chrysotile	2%	Non-Fibrous Material	98%
49	LAYER 1 Carpet, Gray, Homogeneous	None Detected		Synthetic Fiber Non-Fibrous Material	70% 30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected		Non-Fibrous Material	100%
50	LAYER 1 Carpet, Tan, Homogeneous	None Detected		Synthetic Fiber Non-Fibrous Material	70% 30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected		Non-Fibrous Material	100%
	LAYER 3 Mastic, Black, Homogeneous	Chrysotile	2%	Non-Fibrous Material	98%

Anh Phung Analyst

Scott Ward, Ph.D. Lab Director

This report relates only to the materials tested. This report is for the exclusive use of the addressed client and shall not be reproduced except in full, without written approval by J3 Resources, Inc. (J3). Samples are analyzed according to the methods listed above and are subject to the inherent limitations of PLM and interference of matrix components. Reporting limit for the above method is a function of the quantity of sample analyzed, matrix interference, sample preparation, fiber size, and distribution. Asbestos may be detected in concentrations of <1% by area if sufficient material is analyzed. J3 recommends TEM confirmation of soils, vermiculite and non-friable organically bound materials (NOB) reported as None Detected or < 1% Asbestos by PLM. All samples received in good condition unless otherwise noted. This report shall not be used to claim product approval, certification, or endorsement by NVLAP, NIST, or any agency of the federal government.

NVLAP Lab Code: 200525-0 TDSHS License: 30-0273 Page 9 of 12



Bulk Asbestos Fiber Analysis by Polarized Light Microscopy (PLM) Appx E Sub E 40 CFR 763 / EPA 600/R-93/116

 Robert Storment
 J3 Order #:
 JH20121716

 Ensolum, LLC
 Project #:
 02A1648001.024

 2351 W. Northwest Hwy. Suite 1203
 Date Received:
 10-Sep-2020

 Dallas TX 75220
 Date Reported:
 10-Sep-2020

Signal-CPSB - Assessment Building

Sample ID #	Sample Description	Asbestos Constituents	Non-Asbestos Constituents	
51	LAYER 1 Carpet, Tan, Homogeneous	None Detected	Synthetic Fiber Non-Fibrous Material	70% 30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 3 Mastic, Black, Homogeneous	Chrysotile 2%	Non-Fibrous Material	98%
52	LAYER 1 Carpet, Tan, Homogeneous	None Detected	Synthetic Fiber Non-Fibrous Material	70% 30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
	LAYER 3 Mastic, Black, Homogeneous	Chrysotile 2%	Non-Fibrous Material	98%
53	LAYER 1 Carpet, Purple, Homogeneous	None Detected	Synthetic Fiber Non-Fibrous Material	70% 30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
54	LAYER 1 Carpet, Purple, Homogeneous	None Detected	Synthetic Fiber Non-Fibrous Material	70% 30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
55	LAYER 1 Carpet, Purple, Homogeneous	None Detected	Synthetic Fiber Non-Fibrous Material	70% 30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%

Anh Phung Analyst

Scott Ward, Ph.D. Lab Director

This report relates only to the materials tested. This report is for the exclusive use of the addressed client and shall not be reproduced except in full, without written approval by J3 Resources, Inc. (J3). Samples are analyzed according to the methods listed above and are subject to the inherent limitations of PLM and interference of matrix components. Reporting limit for the above method is a function of the quantity of sample analyzed, matrix interference, sample preparation, fiber size, and distribution. Asbestos may be detected in concentrations of <1% by area if sufficient material is analyzed. J3 recommends TEM confirmation of soils, vermiculite and non-friable organically bound materials (NOB) reported as None Detected or < 1% Asbestos by PLM. All samples received in good condition unless otherwise noted. This report shall not be used to claim product approval, certification, or endorsement by NVLAP, NIST, or any agency of the federal government.

NVLAP Lab Code: 200525-0 TDSHS License: 30-0273 Page 10 of 12



Bulk Asbestos Fiber Analysis by Polarized Light Microscopy (PLM) Appx E Sub E 40 CFR 763 / EPA 600/R-93/116

 Robert Storment
 J3 Order #:
 JH20121716

 Ensolum, LLC
 Project #:
 02A1648001.024

 2351 W. Northwest Hwy. Suite 1203
 Date Received:
 10-Sep-2020

 Dallas TX 75220
 Date Reported:
 10-Sep-2020

Signal-CPSB - Assessment Building

Sample ID #	Sample Description	Asbestos Constituents	Non-Asbestos Constituents	
56	Ceiling Tile, White/ Gray, Homogeneous	None Detected	Cellulose Fiber Mineral Wool Non-Fibrous Material	50% 30% 20%
			Non-Fibrous Material	20%
57	Ceiling Tile, White/ Gray, Homogeneous	None Detected	Cellulose Fiber Mineral Wool	50% 30%
			Non-Fibrous Material	20%
58	Ceiling Tile, White/ Gray, Homogeneous	None Detected	Cellulose Fiber	50%
			Mineral Wool Non-Fibrous Material	30% 20%
59	LAYER 1	None Detected	Synthetic Fiber	70%
	Carpet, Green, Homogeneous		Non-Fibrous Material	30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
60	LAYER 1	None Detected	Synthetic Fiber	70%
	Carpet, Green, Homogeneous		Non-Fibrous Material	30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
61	LAYER 1	None Detected	Synthetic Fiber	70%
	Carpet, Green, Homogeneous		Non-Fibrous Material	30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%

Anh Phung Analyst

Scott Ward, Ph.D. Lab Director

This report relates only to the materials tested. This report is for the exclusive use of the addressed client and shall not be reproduced except in full, without written approval by J3 Resources, Inc. (J3). Samples are analyzed according to the methods listed above and are subject to the inherent limitations of PLM and interference of matrix components. Reporting limit for the above method is a function of the quantity of sample analyzed, matrix interference, sample preparation, fiber size, and distribution. Asbestos may be detected in concentrations of <1% by area if sufficient material is analyzed. J3 recommends TEM confirmation of soils, vermiculite and non-friable organically bound materials (NOB) reported as None Detected or < 1% Asbestos by PLM. All samples received in good condition unless otherwise noted. This report shall not be used to claim product approval, certification, or endorsement by NVLAP, NIST, or any agency of the federal government.

NVLAP Lab Code: 200525-0 TDSHS License: 30-0273 Page 11 of 12



Bulk Asbestos Fiber Analysis by Polarized Light Microscopy (PLM) Appx E Sub E 40 CFR 763 / EPA 600/R-93/116

 Robert Storment
 J3 Order #:
 JH20121716

 Ensolum, LLC
 Project #:
 02A1648001.024

 2351 W. Northwest Hwy. Suite 1203
 Date Received:
 10-Sep-2020

 Dallas TX 75220
 Date Reported:
 10-Sep-2020

Signal-CPSB - Assessment Building

Sample ID #	Sample Description	Asbestos Constituents	Non-Asbestos Constituents	
62	LAYER 1 Carpet, Green, Homogeneous	None Detected	Synthetic Fiber Non-Fibrous Material	70% 30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%
63	LAYER 1 Carpet, Green, Homogeneous	None Detected	Synthetic Fiber Non-Fibrous Material	70% 30%
	LAYER 2 Mastic, Yellow, Homogeneous	None Detected	Non-Fibrous Material	100%

Anh Phung Analyst Scott Ward, Ph.D. Lab Director

This report relates only to the materials tested. This report is for the exclusive use of the addressed client and shall not be reproduced except in full, without written approval by J3 Resources, Inc. (J3). Samples are analyzed according to the methods listed above and are subject to the inherent limitations of PLM and interference of matrix components. Reporting limit for the above method is a function of the quantity of sample analyzed, matrix interference, sample preparation, fiber size, and distribution. Asbestos may be detected in concentrations of <1% by area if sufficient material is analyzed. J3 recommends TEM confirmation of soils, vermiculite and non-friable organically bound materials (NOB) reported as None Detected or < 1% Asbestos by PLM. All samples received in good condition unless otherwise noted. This report shall not be used to claim product approval, certification, or endorsement by NVLAP, NIST, or any agency of the federal government.

NVLAP Lab Code: 200525-0 TDSHS License: 30-0273 Page 12 of 12

Revision #v7/MF Revision Date: 3/09/2020

IH CHAIN OF CUSTODY



☑ Open Lab Fee


\$.5	100	C 173 E	100	oe.

Submitter Name:	Kc	ullen K	au	-/c			Bill to:		Ensolum, L	LC			
Company:	Ensolum, LLC			Address	:	2351 W. Northwest Hwy							
Address:	235	1 W. Nort	hwest	Hwy					Suite 1203				
	Suit	te 1203					City/Stat	٠	Dallas, TX		Zip:	75220	
Dal	las,	TX			7522	·n	1 .		648 00 L C		_ Zip.		
City/State:				Zip:	7522		PO #:		340 00 (. C	704			j. 15
Project Name: Sign		DCD				/JCCC 1	1		anager: Rob	ert Storme	ent		
Project #: 02A1648									e - Office/Ce			7	
									- Onios/Ce	31 3 10-20	0-110	<u> </u>	
Reports - Email Add					n, mra	amos@			D	ail II	\ /o.wk		
Invoice - Email Add		. inio@en	solulii.	com			NOI	псап	on By: Em	nail: 🔳	vert	oal: 🗆	
Special Instructions	3:												
				Turnaro	und	Times	– Pleas	e Se	elect One				
Emergency*	Ø	1	Day			2 Day			3 Day			5 Day	
						ASB	ESTOS						
PLM - Bulk		PCM -	Air	TEM -	Air	TE	M - Bulk	TI	EM - Water	TEM -	Dust		/PLM iculite/Ore
EPA 600/R-93/116 Visual Estimation (< 400 Point Count 0.2 1,000 Point Count 0 Gravimetric Reduction Matrix Reduction (+, NIOSH 9002 OSHA ID-191	25% 0.1% ion	% O ISO 8672 O ASTM D6281 O Matrix Redu O ISO 13794 O Quality O Drop		uction (<1%) ix uction (+/-) litative (+/-) p Mount	O EI Rec	rinking Water >10 µm fibers ≥0.5 µm fibers Wip PA 100.2 ffluent / WW eived on ice: Yes ○ No Micro AST Wip Car Car Qua		O ASTM D6480 O CARB 438 Wipe O Soil - PLM		21-TEM (<1%) 5-Modified 1 Only (+/-) e - TEM (+/-) e-Cincinnati			
				META	LS	:				SIL	.ICA	/PARTIC	ULATES
Flame	AA		Gr	aphite Fu	_	AA -		J	СР	X-Ra	y Dif	fraction / G	ravimetric
O Lead in Paint – SW846 7420/3050B O Lead in Air – NIOSH 7082 O Lead in Wipes – SW846 7420/3050B O Lead in Soil – SW846 7420/3050B O TCLP – SW846-1311/6010B O Drinking Water – EPA 200.9 O Wastewater – SW846-7421 O Soil/Studge – SW846-7421 O Air – NIOSH 7105		O Wipe/So O Effluent	O Elements in Air – NIOSH 7300 O Wipe/Soil – SW846-6010B O Effluent – SW846-6010B O Welding Fume – NIOSH 7300M O NIOSH 0500 – Total P O NIOSH 0500 – Respira		00 / OSHA 142 00 – Total Parti	culates							
Total Number of	of Sa	amples \$	Subm	itted: (රු		Positiv	e St	op: 🗆	YES		NO	
		1.154	11		1	Sign	natures			<u> </u>	1		1/.5
Relinquished By:	-		1/2			7_		<u></u>	Date	014	1-20	_ Time:	1825
Received By:	-	 		·		- · - <u></u>		X	Date	7-1) ((eo)k	_ Time:	404r
Relinquished By:	-								Dat			_ Time:	
Received By:						···			Date	e:		Time:	

^{*} Emergency TAT requires prior lab notification. All samples analyzed outside normal business hours are charged at Emergency rate.
**TAT's are in Business Days rather than Hours (i.e.1 Day TAT = End of Next Business Day)

Revision #v7/MF Revision Date: 3/09/2020

IH CHAIN OF CUSTODY



J3 Resources

Project Name <u>Signal-CPSB</u> Project Number <u>02A1648のいい</u>で

SAMPLE IDENTIFICATION

Page 2 of 2

SAMPLE NUMBER	SAMPLE LOCATION / MATERIAL	VOLUME/CONDITION
1-63	* see attached *	
	<u> </u>	
Comments/Special Instructions:		

HOMOGENEOUS MATERIALS FORM

Project No.: 02A1648001.024

Date: 9/10120

Project Name: Assessment Building

Inspector:

	Homo. Ident.	Materials Description	Sample No.	Quantities
5	cti	244 ceiling tile smooth, pin hole large N. Hallway, W. Hallway, lounge,	1,2,3,4,5	
7	VFTI	white within floor viny tile wi bluck mustic rest. office entry, Rm. 121, ass, entry, supply rm entry, Rm. 120 entry, Rm. 117, Rm. 111 hallway	6,7,8,9,10,11,12	
3	VFT2	tan w) white vingl theor file who black mastic N. hall, E. entry, w. Hall	13,1415	
3/	CT2	2XY Ceiling tile small pinhole Ass. &Acc. Hallway, N. Hallway	16,17,18	
3,	VSFI	Vinyl sheet floor light tun w1 white N. entry RRA	19,20,21	
7岁	VFT3	wray with ten vinyl floor tite wi yellow mastic cont. room, Rm. 114, 111, 112, 116, N. cont. Rm	22,23,24,25,26,27,28	
7	CB1	cove base wi mastic water launge rm, 2m. 104, entry, 2m. 115, 116. cont. 100m,	24,30,31,32,33,34,35	
3/	VFT4	blue viny floor tile why dlaw mastic early child hood hall way the entry	36,37,38	
3/	VFT	cream vinys floor tile wi mustic lounge	<i>७१</i> ,५०,५।	



HOMOGENEOUS MATERIALS FORM

Project No.: 02A1648001.024

Date: 9/10/24

Project Name: Assessment Building

Inspector:

	Homo. Ident.	Materials Description	Sample No.	Quantities
3	CPTI	Si reception office	42,43,44	
5	CPT2	gray carpet w mastic Rm. 105, Rm. 103 office, 104	45,46,47,48,49	
3/		rown compet will mastic	50,51,52	
3	CPT4	Purple curpet w/ mustic Rm. 106	53,54,55	
3	CT3	ZXZ Ceiling tile large pinnote receptionist, italiway Fayer, S. Hallway	54,57,58	
53	CPT5	orden carpet wi mastic Rm. 100, Test Dept. office, Rm. 113,119, 120	54,60,61,6463	

Section C

<u>DESIGNATED PERSON</u> (LAC 33:III.2705.A.7 and 2705.A.8)

Name of Designated Person:	Kenny Brown
Address of Designated Person:	3310 Broad Street
	Lake Charles, LA 70602
Phone Number:	337-309-0608
Fax Number:	337-437-1293
E-mail of Designated Person:	Kenny.Brown@cpsb.org

Attach copy of the training certificate received by the Designated Person from a recognized trainer. Place the certificate behind Section C. You may find a list of Training Providers that teach this course on the Asbestos Web page at http://www.deq.louisiana.gov/portal/tabid/2883/Default.aspx.

Course Name:	Asbestos Designated Person Training
Date of Training:	1/10/2024
Length of Training (hours):	8
Training Organization:	Wynn L White Consulting Engineers
Instructor(s):	Wynn White

WYNN L. WHITE CONSULTING ENGINEERS, INC.

certifies that

Kenny Brown

has completed the requisite training for accreditation as required under LAC 33:III. Chapter 27, 2705.8 and TSCA Title II

Asbestos Designated Person Training

Course Completion Date: <u>1/10/2024</u> Examination Date: <u>1/10/2024</u> Granted: 1/22/2024

Ch' whith

Chris White, P.E.

Certificate No.



Sponsored by:
Wynn L. White Consulting Engineers, Inc.
Post Office Box 83527
Baton Rouge, LA 70884-3527
Phone: (225) 761-9141
Fax: (225) 761-4450

Helping companies that want to protect their employees and managers who want to cut environmental and safety costs.

Email: wwhite@wynnwhite.com

STATE OF LOUISIANA DEPARTMENT OF ENVIRONMENTAL QUALITY

certifies that

Wynn L White

Has complied with all requirements of the Louisiana Department of Environmental Quality and is authorized to perform the duties of

Asbestos Trainer - Contractor/Supervisor - Initial, Contractor/Supervisor - Refresher, Inspector - Initial, Inspector - Refresher, Management Planner - Initial, Management Planner - Refresher, Project Designer - Initial, Project Designer - Refresher, Worker - Initial, Worker - Refresher

Accreditation No. FT095572

AI No. 95572

Date of Issuance February 10, 2025

Expiration February 10, 2026

Failure to comply with all applicable provisions of La. R.S. 2025.E. (1)(a) and La. R.S. 2025.F. (2)(a) may result in civil and/or criminal enforcement actions by the State.

Permit Support Services Division
Office of Environmental Services

DESIGNATED PERSON GENERAL RESPONSIBILITIES UNDER LAC 33:III. Chapter 27

Pursuant to *LAC 33:III.2705.A* and *LAC 33:III.2723.H* of the Louisiana Air Quality Regulations, (Asbestos-Containing Materials in Schools and State Buildings), each Management Plan must contain a true and correct statement, signed by the Designated Person, that certifies that the general Management Plan responsibilities have been met. This form is provided to assist you in complying with this portion of *LAC 33:III.Chapter 27*.

School/Agency:	CPSB Assessment Building		
Building Address:	1618 Mill Street Lake Charles, LA 70601		
Designated Person:	Kenny Brown		
Designated Person's	3310 Broad Street		
Address:			
City: Lake Charles	State: LA		City: Lake Charles
Phone No: 337-309-0608		Email: Kenny.brown@cpsb.org	

ASSURANCES

This asbestos Management Plan was developed and has been submitted pursuant to *LAC* 33:III.Chapter 27 of the Louisiana Air Regulations, Asbestos-Containing Materials is Schools and States Buildings, and the undersigned does hereby certify that the Designated Person has and will ensure the following:

- ∑ 1) The activities of any person, who performs inspections, re-inspections, and periodic surveillance, develops and updates Management Plans, and develops and implements response actions, including operations and maintenance, are carried out in accordance with LAC 33:III. Chapter 27.
- 2) All custodial and maintenance employees are properly trained as required in *LAC* 33:III.Chapter 27 and all other applicable federal and/or state regulations (e.g., the Occupational Safety and Health Administration Asbestos Standard for Construction, the EPA Worker Protection Rule, or applicable state regulations).
- All short-term workers (e.g., telephone repair workers, utility workers, or exterminators etc.) who may come in contact with asbestos in a school are provided information regarding the locations of ACBM and suspected ACBM assumed to be ACM.

S 5)	All warning labels are posted in accordance with <i>LAC 33:III.2727</i> . All management plans are available for inspection and that notification of such availability has been provided as specified in the Management Plan under <i>LAC 33:III.2723.F</i> .			
⊠ 6)				
7)	The undersigned Designated Person pursuant to <i>LAC 33:III.2705.A.7</i> received adequate training as stipulated in <i>LAC 33:III.2705.A.8</i> .			
8)	interrelationship among accredited p	whether any conflict of interest may arise from the tersonnel and whether that should influence the rform activities under <i>LAC 33:III.Chapter 27</i> .		
Signat	Designated Rerson, pursuant to LAC 33:III.2723.H	_ Phone No: <u>337-309-0608</u>		
	10 LAC 33.111.2723.11	Fax No		
Email	Address: <u>kenny.brown@cpsb.org</u>			

Section D

RESPONSE ACTIONS

Α.	Actions under <i>LAC 33:III.2717</i> . Attach recommendations behind Section D.				
	☐ Check if the building is NOT used for Educational purposes.				
	☐ Check if there is no ACM in the building.				
	Name of Person Making Recommendation: Chris White, P.E.				
	Recommendation Person's Signature:				
	Louisiana DEQ Accreditation No: JP095575				
	Date of Expiration: <u>1/17/2026</u>				

Section D

B. Provide the following written detailed description of preventive measures/response actions to be taken for any friable ACBM, including the following: (*LAC 33:III.2723.D.6*) Recordkeeping Requirements are to be maintained as part of the management plan (*LAC 33:III.2725*)

Methods to be used	
Location where measure or action will be taken	
taken	
Reason for selecting response action or preventive measure	
Beginning date	

Section D

C.	Provide a detailed description in the form of blueprint of ACBM, or assumed ACM, that does or will remain should be placed behind Section D. (<i>LAC 33:III.272</i>)	after response action. Attachment, if any
	☐ Check if there is no ACM in the building.	
D.	The undersigned does hereby certify that he/she is acc A of <i>LAC 33:III.2799.Appendix A</i> . (This applies to who will design or carry out response action, except	the person who inspected for ACBM and
	Louisiana Accredited Inspector's Name: _	Todd Peterson
	Inspector's Signature: Louisiana DEQ Accreditation No:	Todd Peterson MI165930
	Date of Expiration:	3/28/2026
	Louisiana Accredited Project Designer's Name:	
	Project Designer's Signature:	
	Louisiana DEQ Accreditation No:	
	Date of Expiration:	

A thorough asbestos inspection is required before any renovation or demolition work begins, regardless of the
building's age or the installation date of materials.

Section E

ACTIVITY PLANS (LAC 33:III.2723.D.9)

If there is ACM in the building, attach the following:

- A. Attach a written plan for Re-inspection behind Section E (Required only for schools, including post graduate facilities, i.e. universities, etc. in accordance with *LAC 33:III.2707*).
- B. Attach a written plan for Periodic Surveillance behind Section E (Required for <u>all</u> schools <u>and</u> state owned, leased, or otherwise used buildings *LAC 33:III.2721.B*).
- C. Attach a copy of the Operations and Maintenance plan behind Section E. The O & M plan must be completed in accordance with *LAC 33:III.2719*.
- D. Attach a copy of the Management Planner's recommendation regarding additional cleaning under *LAC 33:III.2719.C.2* as part of an operations, maintenance, and repair program.
- E. Attach a copy of the Response to the Management Planner's recommendation by the local education agency (LEA) or owner or responsible party of the state owned, leased or used building.

Section E Additional Data

Periodic Surveillance/Reinspection Plan:

Periodic Surveillance: January 2026

Periodic Surveillance: July 2026

Periodic Surveillance: January 2027

Periodic Surveillance: July 2027

Periodic Surveillance: January 2028

Reinspection: July 2028

Management planner's recommendation regarding additional cleaning: None at this time.

Response to management planner's recommendation regarding additional cleaning: not yet

programmed.

Section F

NOTIFICATIONS AND RESOURCES EVALUATION

Attach the following behind Section F:

NOTIFICATION

Attach a copy of the notification letter sent to parents, teachers, and employees concerning the availability of the Management Plan, including any response actions or activities that took place. Attach behind Section F. (*LAC 33:III.2723.F.4 and LAC 33:III.2723.D.10*)

RESOURCES EVALUATION

Attach an evaluation of resources needed to complete response actions successfully and carry out re-inspection(s), operations and maintenance activities, periodic surveillance, and training. Attach behind Section F. (*LAC 33:III.2723.D.11*)

Section F Additional Data

Resource Evaluation:

Reinspection conceptual budget: \$350

Operations and Maintenance conceptual budget: \$500 implementation

Annual Periodic Surveillance conceptual budget: \$300

Annual training conceptual budget: \$300

Asbestos Abatement Conceptual Budget (Construction): \$15,000

POLICIES

CPSB makes asbestos management plan availability notification via the school board's website, on the policy>asbestos management plan page. https://www.cpsb.org/Page/37732

ASBESTOS MANAGEMENT PLAN

The Calcasieu Parish School Board has retained Wynn L. White Consulting Engineers, Inc. to re-inspect all Calcasieu Parish School Board school facilities for the presence of asbestos containing materials. The work consisted of evaluating asbestos containing materials identified during previous inspections, identifying materials suspected of containing asbestos, sampling those materials, analyzing the samples, making a hazard assessment, making recommendations, and preparing Asbestos Management Plan updates.

The asbestos management plan for each facility is on file at the facility and at the following location:

Wynn L. White Consulting Engineers, Inc.

P.O. Box 83527

Baton Rouge, LA 70884-3527

Phone: 225-761-9141 extension 2

Fax: 225-761-4450

Attn: Chris White, P.E.

Email: cwhite@wynnwhite.com

https://www.cpsb.org/Page/37732

TRANSMITTAL LETTER

DATE: September 23, 2015

TO: All Principals and Building supervisors

From: Mitch Trahan

Planning & construction/ AHERA

P.O. Box 800

Lake Charles, La.70602

We transmit the attached correspondence, directives or documents for your information. If you have any questions or comments fell free to contact me.

DESCRIPTION:

PLEASE POST THE ATACHED NOTIFICATION FOR THE PUBLIC

Mitch Trakon

This is a requirement of the EP and DEQ offices.

Mitch Trahan, Planning & construction/ AHERA

MT/eg

Enclosures:

Cc: Mr. Karl Bruchhaus

File



TO: Parents and Staff of Calcasieu Parish Schools

FROM: Mitch Trahan, Planning & construction / AHERA

DATE: September 23, 2015

In compliance with the U>S> Environmental Protection Agency 9EPA) Asbestos Hazard Response Act (AHERA), in the fall of 1988 we performed inspections of each of our school buildings for asbestos-containing building materials. The inspection findings and asbestos management plans have been on file in each school administrative office since that time.

The EPA requires us to perform I inspections of the asbestos materials every three years. During the month of August 1988, accredited asbestos inspectors performed these inspections. An accredited management planner reviewed the results of the inspections and recommend actions we should take to safely manage each asbestos material in our buildings.

As designated and responsible person for the asbestos program for the Calcasieu Parish Schools, I agree with recommendations of Wynn White, Management Planner, for response actions he has recommended in the reinspections plans. I will follow his guidelines and time table for the removal of asbestos and continue our Operations and Management Program as set forth in the reinspection plan.

The results of the reinspections are on file in the management plan in the school's administrative office. Everyone is welcome to view these anytime during the normal school hours (M-F, 8:00 AM - 3:30 PM). The Asbestos Program Manager, Mitch Trahan, is available to answer any questions you may have about asbestos in our buildings at (337) 217-4350 Ext. 5104.

Sincerely,

Mitch Trahan

Planning & Construction/ AHERA

mitch Traham

MT/eg

Cc: File



August 10, 2015

PUBLIC NOTICE

Public notice is hereby given that in compliance with the Asbestos Hazard Emergency Response Act (AHERA) of 1986, asbestos management plans for Calcasieu Parish Schools are available at the various schools and facilities upon request.

Gary Anderson Assistant Superintendent Human Resources/Auxiliary Services

Publish: American Press and Southwest Daily News August 14, 21, 28, 2015

Publication: American Press; Date: Aug 14, 2015; Section: Classified; Page: D4





Friday, August 21, 2015

available at the various schools and facilities upon request. Gary Anderson Assistant Superintendent Emergency Response Act (AHERA) of 1986, asbestos management plans for Calcasieu Parish Schools are PUBLIC NOTICE P u blicnotice is hereby given that in compliance with the Asbestos Hazard Human Resources/ Auxiliary Services Aug 14,21,28 3t 00925931

D4 AMERICAN PRESS FRIDAY AUGUST 28, 2015

PUBLIC NOTICE

Public notice is hereby given that in compliance with the Asbestos Hazard Emergency Response Act (AHERA) of 1986, asbestos management plans for Calcasieu Parish Schools are available at the various schools and facilities upon request.

Gary Anderson Assistant Superintendent Human Resources/ Auxiliary Services

Aug 14,21,28 00925931

N/ William J. Ross. III.
Exacusive Obrector
Loss Cheries Horbor
and Terminel District
Jul 24-21. Aug 7,74 48
00722304

NOTICE BY OWNER
OF ACCEPTANCE OF
WORK
This is to advise
that the contract

Affidavit of Publication

STATE OF LOUISIANA Parish of Calcasieu

Before me the undersigned authority, personally came and appeared

Lindadrahan

who being duly sworn, deposes and says:

He/She is a duly authorized agent of

LAKE CHARLES AMERICAN PRESS

a newspaper published daily at 4900 Highway 90 East, Lake Charles, Louisiana, 70615. (Mail address: P.O. Box 2893 Lake Charles, LA 70602)

The attached Notice was published in said newspaper in its issue(s) dated:

00925931 - \$25.00

August 14, 2015,

August 21, 2015,

August 28, 2015

Duly Authorized Agent

Subscribed and sworn to before me on this 28th day of August, 2015 at

Lake Charles LA

06100179

Notary Public

CALCASIEU PARISH SCHOOL

BECKY R VENISSAT
Notary Public
State of Louisiana
Calcasiou Parish
Notary 10 # 8546
My Commission Listens, Ai Deuts





August 10, 2015

PUBLIC NOTICE

Public notice is hereby given that in compliance with the Asbestos Hazard Emergency Response Act (AHERA) of 1986, asbestos management plans for Calcasieu Parish Schools are available at the various schools and facilities upon request.

Gary Anderson Assistant Superintendent Human Resources/Auxiliary Services

Publish: American Press and Southwest Daily News August 14, 21, 28, 2015



August 10, 2015

Mark Hayes, President Calcasieu Association of Educators 300 East McNeese Street Ste. 4A Lake Charles, Louisiana 70605

Dear Mr. Hayes,

The Asbestos Hazard Emergency Response Act (AHERA) of 1986 requires that teacher and employee organizations be given written notification by the local education agency of the availability of management plans. This letter serves as our annual notification.

The principals and/or building administrators have the plans at this time and the plans are available upon request.

Please make this announcement available to your membership.

Thanks for your assistance in this matter.

Lay Elnduson

Gary Anderson

Assistant Superintendent

Auxiliary Services

GA:dv

MANAGEMENT PLAN CONTRIBUTORS

A. List the accredited management planner and all other consultants who contributed to the Management Plan. Attach Louisiana accreditation certificate for <u>current</u> asbestos management planner behind Section F. (*LAC 33:III.2723.D.12*)

Name	Accreditation No.	Expiration Date	Signature	Email address
Chris White	JP095575	1/17/2023	Chiwhit	cwhite@wynnwhite.com
Chris White	JP095575	1/17/2026	Chiwhit	cwhite@wynnwhite.com

STATE OF LOUISIANA DEPARTMENT OF ENVIRONMENTAL QUALITY

certifies that

Christopher M White

Has complied with all requirements of the Louisiana Department of Environmental Quality and is authorized to perform the duties of

Asbestos Management Planner

Accreditation No. JP095575

AI No. 95575

Date of Issuance January 24, 2025

Expiration January 17, 2026

Failure to comply with all applicable provisions of La. R.S. 2025.E. (1)(a) and La. R.S. 2025.F. (2)(a) may result in civil and/or criminal enforcement actions by the State.

Permit Support Services Division
Office of Environmental Services

B. THIRD PARTY ASBESTOS MANAGEMENT PLAN REVIEWER (optional)

A local education agency or the responsible party for the state building <u>may</u> require each management plan to contain a statement signed by a third party accredited management planner as a reviewer to the current accredited management planner, that such person has prepared or assisted in the preparation of such plan or has reviewed such plan, and that such plan is in compliance with <i>LAC 33:III.Chapter 27</i> . (<i>LAC 33:III.2723.E</i>)
☐ Statement is Required by LEA or State
☐ Statement is <u>NOT</u> Required by LEA or State
The undersigned does hereby certify that they have reviewed the management plan and testify that the plan complies with <i>LAC 33:III.2723</i> of the Louisiana Air Quality regulations. (Statement may NOT be signed by a person who, in addition to preparing or assisting in preparing the Management Plan, also implements or will implement the Management Plan). If signed, attach copy of current management planner accreditation certificate behind Section F. (optional as part of <i>LAC 33:III.2723.E</i>)
Name of Louisiana Accredited Reviewing Management Planner:
Reviewing Management Planner Signature:
Louisiana DEQ Accreditation No:
Expiration Date:

Section G Part I

RECORDKEEPING

PREVENTATIVE MEASURES/ RESPONSE ACTIONS

For each preventative measure and response action performed after December 14, 1987, the local education agency or responsible party for the state building shall provide the following information:

- A. A detailed written description of the action taken. The description should include the following information. Attach behind Section G, Part I. (*LAC 33:III.2725.B.1*)
 - Methods Used
 - Location of Measure or Action
 - Reason for Selection of Action
 - Names and Addresses of all Contractors Involved
 - Louisiana Accreditation Number of Contractor/Supervisor(s)
 - Storage or Disposal Site if ACM was Removed

form_7082_r02 Revised: 8/9/2019 B. The name and signature of any person collecting air samples required at the completion of response actions. (*LAC* 33:III.2725.B.2) Note that the person conducting air monitoring must be LDEQ accredited as an asbestos Contractor/Supervisor.

Name	Accreditation No	Expiration Date	Signature

- C. A written description of the locations where samples were collected. The following information should be included in the description. Attach behind Section G, Part I. (*LAC 33:III.2725.B.2*) Note that the laboratory conducting analysis of air samples must be a LELAP accredited lab. Attach a copy of the LELAP certificate and scope of accreditation behind Section G, Part I.
 - Date of Collection
 - Name and Address of Analyzing Laboratory
 - Date of Report (compliant with LAC 33:I.5313.A and 5313.B)
 - Results of Analysis
 - Methods of Analysis
 - Name and Signature of Analyst
 - LELAP Laboratory Accreditation Certificate and scope of accreditation behind Section G, Part I.

form_7082_r02 Revised: 8/9/2019



May 20, 2022

Mr. Mark Sutton Calcasieu Parish School Board 3800 Mallard Cove Drive Lake Charles, LA 70615 (sent via email)

RE: May 2022 Assessment Building at 1618 Mill Street Asbestos Air

Area Monitoring and Clearance Sampling Results

21036

Dear Mark:

I have enclosed the analytical results for the asbestos air area monitoring samples and asbestos air clearance samples Jeffrey Johnson, an accredited asbestos contractor/supervisor, collected May 13-15, 2022. This report is for your review and files.

Jeffrey Johnson analyzed the asbestos air area monitoring samples using Phase Contrast Microscopy. EMSL Analytical, Inc. of Baton Rouge, LA analyzed the asbestos air clearance samples using Transmission Electron Microscopy (TEM).

Area air samples were collected from outside the containment area in the vicinity of the removal work. Clearance air samples were collected inside the containment area.

Insul-Tech successfully removed the floor tile/mastic from room 101 and the lounge room. The asbestos clearance air sample results were below the EPA recommended clearance level of 70 s/mm². Therefore, the areas were released to the owner.

If you have questions or would like to discuss the project, please call me at (225) 761-9141 extension 2.

Very truly yours,

Wynn L. White Consulting Engineers, Inc.

Chris White, P.E. Vice President

(whit

Enclosures: Air Sample Logs 05/13-15/2022, Activity Documentation 05/13-14/2022, and EMSL

Analytical, Inc. Reports 252202351 and 252202352

Voice: (225) 761-9141 Fax: (225) 761-4450 www.wynnwhite.com

				· ·								
			٠								And the second s	
									A CONTRACTOR OF THE CONTRACTOR			
											Annual Control of Cont	
	and the second s										The same of the sa	
									1			
10.00	A September 1	and been	S)	ò	0.0	Ö	621	6.300	4.00pm	21-1012	74332014	J
10009	100	N.	En	Š).	20	0.0	150	6:30 pm	4:00	21-104	15132273	B
	E/_ 2	1 %	1		1	I	1	1	1		2/30272	8
De 17.0	F/mm 2 6	late Black	١	1	i,	1	1	1	1	Y	15(S)201	R
Result	Sample Identification/information		Sample Volume (liters)	Flow Rate (LPM)	e Post Cal Rate	e Pre-Cal Rate	Elapsed Time (min)	Time Off	Time On	Pump #	Sample ID Number	
	, (urch Reign)	(Peor 102		·	4.9.50.04				CP)	10 20m	ethod: Loternak	Calibrat
ÿ	Souther wer bear	- 1 II II		1 70884 141 Log	Baton Rouge, LA 70884 (225) 761-9141 Air Sample Log	Baton (Air				Masca	Cheshy C	Analyzed by: Checked By:
		Cassette Lot #: 256		577 S, INC.	PO Box 83527	₩ ₩ ₩			ant Bill	A.5855mon	(W)	Project:
	CAN P.	Analytical Method: NK54 7463			NN L. W	W			21036	Project No.: 2/036	Date: 13.22	Date:

Batton Rouge, Liv 7084 (220) Ft. 1941 Air Sample Log (200) (2	nher Reserve	05142DIS	05142216				The state of the s				
Time On Time of Ebspeed Time Pre-Cal Rate Ped Call Flow Rate Values (Report Of Assays) For Call Flow Rate Values (Report Of Assays) Values (Rep		21-1013	21-104							***************************************	
Baton Rouge, LA 70884 Air Sample Log A.9.50.04 A.9.5	7:25 am	7:2500	7:26 ac								
Baton Rouge, LA 70884 Air Sample Log 4.9.50.04 Pre-Cal Rate Rose Rate (LPM) Pre-Cal Rate Rat		4:20	4.31pm								
Rouge, LA 70884 Sample Log A.9.50.04 A.9.50.04 Post Call Flow Rate (Lepn) Sample Sample (Lepn) Volume (litera)											
Notes: Rom (of) (Carry Rom) F. T. (Carry Rom) F. T. (Carry Rom) F. T. (Carry Rom) Sample Identification/infon (Carry Rom 108 way six rahay (Carry Rom) (Carry Rom) (Carry Rom) (Carry	Baton Ro. 1 (225) Air Sa				The state of the s						
Notes: Rom (of) (Carry Rom) F. T. (Carry Rom) F. T. (Carry Rom) F. T. (Carry Rom) Sample Identification/infon (Carry Rom 108 way six rahay (Carry Rom) (Carry Rom) (Carry Rom) (Carry	P.O. Box 83527 aton Rouge, LA 7088 (225) 761-9141 Air Sample Log 4.9.50.04 Post Call Flow Frate (LPA) Post Call (LPA)										
Notes: Dem (OB) (Dunge Res) F. T Sample Identification/Inton Course Com Long Sile Schall Course											
identification/inton	Sample ume (liters)	_	1								
Emaskic Amount Flow 1 1 7.0 Flow 1 2 7.0 Flow 1 2 2 7.0 Flow 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	Cassette Lot #: 25566 Sample Media: 26 mm 300 We Skym ace from Notes: Debn 102 Mesa, F. T. i. Mestic Amous Sample Identification/information Sample Identification/information First Black Fine 2 First Black Fine 2 Course 102 weed six when the Skym ace from Course 102 weed six wh	decay whay I'vo	um me adaist live -								

.

										and the second s
				-						
Ē	1/		0.6	00	100	120	(1:20am	9:2000	ો	051522714
5	1	1300	0.0	10.0	100	120	11:20am	906.0	1	05152213
3	laside enforme		0.0	10.0	10.0	120	11:2000	9:30 am	0	051522712
Ğ	inside andosum	1200	0.0	10.0	10.0	120	11:20 m	9:20 am	1	051529711
B	júside andour	1200	10.0	0.0	10.0	120	11:20	9.30an	Ol	051522T10
Z P	Freid Black	1	1	l	1)	1		1	051520 79
73	late Blank	1	1	1	1	1		1	}	05150208
Result	Sample Identification/information	e Sample Volume (liters)	Flow Rate (LPM)	e Post Cal Rate	Pre-Cal Rate	Elapsed Time (min)	Time Off	Time On		Sample ID Number
	(Claame)		4	4.9.50.04				ESH	1100	Calibration Method: Colombia
			e Log	Air Sample Log	Air					Checked By:
<i> </i>	S. C. C. C. C.		A 70884 9141	Baton Rouge, LA 70884 (225) 761-9141	Baton (EMS
(12m)			3527	P.O. Box 83527	סי		//		Selver .	
	Cassette Lot # 2/6058		S, INC.	ENGINEER				Assonat 1911	Assa	Project: 16/8 mills St
	Analytical Method: 11/6584 7462			WYNN L. WHITE	Ş		141	Project No.: 3/036_/	Project No.:	Date: 05:15:22


るいとうなりかられる

	·									
Z		1910	Ô	10.0	10.0	181	9:06	nils a	11	05/500077
Z V		1210	100	10.0	Ö	101	9:0/2	7:05	0	05150006
S U		120	10.0	10.0	10.0	10	9:06 -	7:05am	12	05(52)55
l 0	R	(Sec)	0,0	10.0	0	120	9:050	7:05 m	d	05152274
てワ		å	0.0	0.0	00	B	9:050	7.05 am	7	05/50213
3	Front Black	1	1	١	1	1	1	1	1	05162272
てネ	late Stark	1	1	1	1	1				05/52271
Result	Sample identification/information	Sample Volume (liters)	Flow Rate (LPM)	Post Cal Rate	Pre-Cal Rate	Elapsed Time (min)	Time Off	Time On	Pump #	Numbe
	(**	4.9.50.04				CAH 1	60 2017	Calibration Method:
	(cleanance)		Log	Air Sample Log	Air					Checked By:
1	Notes: Per 101		A 70884 141	Baton Rouge, LA 70884 (225) 761-9141	Baton (2			The state of the s		ms
72	e e		3527	P.O. Box 83527	ة .			<i>C</i>	5 / /	Production C
	Cassette Lot #: 2/038		S, INC.	ENGINEER	₹			mest Bldg	K	Project: 16/8 Mills St
	Analytical Method: 11105H MCC2			WYNN L. WHITE	ΥW		141	Project No.: 2/036_	Project No.:	Date: 15-15-22

CAN TO BEEN OF THE PARTY OF THE

Docu	ımentation of Activit	ies
WYNN L. WHITE CONSULTING ENGINEERS, INC. P.O. Box 83527 Baton Rouge, La. 70884-3527 Phone 225-761-9141 Fax 225-761-4450	Client Contractor Contractor Supervisor Location WLWCEI Project #: Date	CoPSB Taril tack Maynox Alvacengra 1618 vills st 2026 05-13-22
12 pm deported From B. R. 2.56 pm Annied At 1619 M. 4 pm Started nantaring Ocon	1115 St (Ussessmat 1 n 103 / lunch Porm	Bly) (Balegonel sayday)
Som Acked justs Ok CPS Com Stopped sii pungs Jon Cles Firster propre la	or the day	
,		
Project Supervisor		05-13-00 Date

Do	cumentation of Activit	ies
WYNN L. WHITE CONSULTING ENGINEERS, INC. P.O. Box 83527 Baton Rouge, La. 70884-3527 Phone 225-761-9141 Fax 225-761-4450	Client Contractor Contractor Supervisor Location WLWCEI Project #: Date	[PSB] Iwal-tech Mayner Alvalenga 1618 Millst (Assessment Bldg) 21036-141 05-14-22
6:30 m Assaud on site 7:05 an Standed pumps on 1:05 an Standed pumps on All ary min exhaut,	1 ang a new (com 54)	(antel persol)
17:45 am Stranfad on Builde 10 cm checked out pumps 12pm lunch Cause 1pm Stranfad Bude doing 4	(SK)	
Clas Stantal Fine Clas 2:12pm cnew Firish with Pear 2:30pm Visual passed Stop 2:41pm Cnew Still permoving	n (c) peravil	that confrient
4pm can Frankel with act Visual passed on Be can enclosed for le	Path one formes will so	en cleaner tomasas
4:30pm Stapped All pumps Spm Finished up All Build	dry susures Fore way	
Jeff John John Project Supervisor		05-14-22 Date



EMSL Order: 252202351 Customer ID: WYNN50

Customer PO: Project ID:

Fax:

Attention: Chris White Phone: (225) 761-9141

Wynn L. White Consulting Engineers, Inc.

PO Box 83527 Received Date: 05/16/2022 08:30 AM

Baton Rouge, LA 70884-3527 Analysis Date: 05/16/2022
Collected Date: 05/15/2022

Project: 21036_141

Test Report: Asbestos Fiber Analysis by Transmission Electron Microscopy (TEM) Performed by EPA 40 CFR Part 763 Appendix A to Subpart E

Sample	Location	Volume (Liters)	Area Analyzed (mm²)	Non Asb	Asbestos Type(s)	#Structu ≥0.5µ < 5µ		Analytical Sensitivity (S/cc)		estos ntration (S/cc)
051522J3 252202351-0001		1200.00	0.0645	0	None Detected	0	0	0.0050	<16.00	<0.0050
051522J4 252202351-0002		1200.00	0.0645	0	None Detected	0	0	0.0050	<16.00	<0.0050
051522J5 252202351-0003		1210.00	0.0645	0	None Detected	0	0	0.0049	<16.00	<0.0049
051522J6 252202351-0004		1210.00	0.0645	0	None Detected	0	0	0.0049	<16.00	<0.0049
051522J7 252202351-0005		1210.00	0.0645	0	None Detected	0	0	0.0049	<16.00	<0.0049


Ana	lyst	(S)	

Joshua Vu (5)

Jamie Laginess, Laboratory Operations Manager or other approved signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. Results reported in structures/cm3 are not covered by the laboratory's NVLAP accreditation. Measurement of uncertainty available upon request.

Samples analyzed by EMSL Analytical, Inc. Baton Rouge, LA NVLAP Lab Code 200375-0, LELAP 01950, TX 300238



EMSL Order: 252202352 Customer ID: WYNN50

Customer PO: Project ID:

Fax:

Attention: Chris White Phone: (225) 761-9141

Wynn L. White Consulting Engineers, Inc.

PO Box 83527 Received Date: 05/16/2022 08:30 AM

Baton Rouge, LA 70884-3527 Analysis Date: 05/16/2022
Collected Date: 05/15/2022

Project: 21036_141

Test Report: Asbestos Fiber Analysis by Transmission Electron Microscopy (TEM) Performed by EPA 40 CFR Part 763 Appendix A to Subpart E

Sample	Location	Volume (Liters)	Area Analyzed (mm²)	Non Asb	Asbestos Type(s)	#Structu ≥0.5µ < 5µ		Analytical Sensitivity (S/cc)		estos ntration (S/cc)
051522J10 252202352-0001		1200.00	0.0645	0	None Detected	0	0	0.0050	<16.00	<0.0050
051522J11 252202352-0002		1200.00	0.0645	0	None Detected	0	0	0.0050	<16.00	<0.0050
051522J12 252202352-0003		1200.00	0.0645	0	None Detected	0	0	0.0050	<16.00	<0.0050
051522J13 252202352-0004		1200.00	0.0645	0	None Detected	0	0	0.0050	<16.00	<0.0050
051522J14 252202352-0005		1200.00	0.0645	0	None Detected	0	0	0.0050	<16.00	<0.0050

Joshua Vu (5)

Jamie Laginess, Laboratory Operations Manager or other approved signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. Results reported in structures/cm3 are not covered by the laboratory's NVLAP accreditation. Measurement of uncertainty available upon request.

Samples analyzed by EMSL Analytical, Inc. Baton Rouge, LA NVLAP Lab Code 200375-0, LELAP 01950, TX 300238

2351



CHAIN OF CUSTODY

PROJECT DATA	SHIPPING DATA	<u> </u>	L/	ABORATORY
Project No. 13	Samples Shipped via: //med		Name:	EMSL
			Address:	18369 Petroleum Drive
21036-141				
Samples Collected by:			City, State, Zip	Baton Rouge, LA 7,0809
Jeffay Johnson			Samples Rec'd	
	-			Signature
Date: 05-15-22			Date Received:	5/11/13/2 @ 8:30 and
<u></u>	SAMPLE IDE	NTIFICATION	<u> </u>	
05153051	lab Blook			
05150010	FIELD Blank			
05152013_	1200 vol(L)			
051600014	1200 101(4)			
05152275	1210 ust (L)	 -	-	
05152256	1210 vol (L)	_	 _	
05190057_	1210 vol (c)			
 -				
		- 		
<u> </u>				
-		- 		
 -		- 		
			_	
	····			
		-	 -	
·		-		
<u> </u>		_		
		_		
	SPECIAL CONDITION	ONS OR COM	MENTS	·
Analysis: (K)	TEM 7082 Lead		Mold Air-O-Cell	Volume:
	PCM TCLP Metals		Mold Agar Plate	
	PLM Other:		Mold Bulk or Sw	ab
Methampheta	mine by GC/MS Special Detection	n Limit Req:	0.5 uç	g/wipe
			* * *	
Requested Turnaround:	7 Day	24 Hour	KD 🖘	Other 6 HRS
	3 Day	☐ Same Day		
	6-10 Day	24-48 Hou	<u>r</u>	
Toti. Samples:	7			
Comments/Instructions:		_		<u> </u>
		_		
				<u> </u>
SEND RESULTS TO:	johnson @ wynnuhit			4.9.80
	cwhite@wynnwhite.com, dwhite	@wynnwhite.co		Post Office Box 83527
レスタッタグ Environmental • Health • S	Safoty		В	aton Rouge, LA 70884-3527 Voice Mail (225) 761-9141
Engineers • Traininers • C				Fax No. (225) 761-4450

Page 1 Of

1

2352



Engineers • Traininers • Consultants

CHAIN OF CUSTODY

PROJECT DATA	SHIPPING DATA	LABORATORY
Project No.(s):	Samples Shipped via: Hand	Name: EMSL
21036_141		Address: 18369 Petroleum Drive
Samples Collected by:		City, State, Zip Baton Rouge, LA 70809
Jeptay Johnson		Samples Rec'd by:
		Signatu
Date: 05-15-02	-	Date Received: 5/1/2/22 @ 8:3
	SAMPLE IDEN	TIFICATION
05152278	lab Black	
06152279	Field Black	
051522510	1200 voi(L)	
051522011	1200 vol (L)	
051522712	1200 vol (L)	
05 1620 J13	1200 vol (L)	
051522 514	1200 vol (c)	
 		
·		
		
<u>.</u>	- 	
		
- <u> </u>		
		
<u> </u>		-
_		
	SPECIAL CONDITION	US OB COMMENTS
Analysis:	TEM 7082 Lead	
Allalysis.		Mold Ager Diete on Dedes Diete
<u> </u>		Mold Agar Plate or Rodac Plate
	PLM Other: ———	Mold Bulk or Swab
	mine by GC/MS Special Detection I	imit Req: 0.5 ug/wipe0.1 ug/wip
Requested Turnaround:	7 Day	24 Hour # Other 6 4485
zednesien Linuatonua;		
<u> </u>	3 Day	Same Day
Total Number of Commission	6-10 Day	24-48 Hour
Total Number of Samples:	-	_
Comments/Instructions:		
		
		,
SEND RESULTS TO:	Oranson @ Wynna while	
- 21	cwhite@wynnwhite.com, dwhite@i	
LL Long Riv Environmental • Health • S	Safety	Baton Rouge, LA 70884-3

Page 1 Of 1

Voice Maii (225) 761-9141 Fax No. (225) 761-4450

CALCASIEU PARISH SCHOOL BOARD

ASBESTOS AIR SAMPLING Pupil Appraisal – 1618 Mill Street

Lake Charles, LA

1/7/20

PROJECT NUMBER 20046

Prepared by:

Chris White & Claire White

Wynn L. White Consulting Engineers, Inc. 17485 Opportunity Ave, Suite C Baton Rouge, LA 70817 Phone: (225) 761-9141 Fax: (225) 761-4450

TABLE OF CONTENTS

	Page
I. INTRODUCTION	1
II. AIRBORNE ASBESTOS EXPOSURE LIMITS	1
III. TOXICOLOGICAL HAZARDS OF ASBESTOS	1
IV. AIR SAMPLING PROCEDURES	2
V. AIR SAMPLING RESULTS	2
VI. CONCLUSION	2

I. INTRODUCTION

Wynn L. White Consulting Engineers, Inc. (WLWCEI) provided asbestos air monitoring services during floor tile/mastic removal at Pupil Appraisal Room 113 located at 1618 Mill Street in Lake Charles, Louisiana. The project began on December 22, 2020 and finished on December 23, 2020. Troy Hawthorne, an air sampling professional with WLWCEI, collected area air samples and clearance air samples. Troy Hathorne analyzed area samples using Phase Contrast Microscopy (PCM). EMSL Analytical Inc. of Baton Rouge, LA analyzed clearance area air samples using Transmission Electron Microscopy (TEM).

II. AIRBORNE ASBESTOS EXPOSURE LIMITS

Acceptable airborne concentrations of hazardous substances are based on available information from animal and human population studies. All substances having restrictive exposures have been assigned an acceptable 8-hour average limit.

The Occupational Safety and Health Administration (OSHA) has its own standards for asbestos that act as legal restrictions.

The current OSHA Permissible Exposure Limit (PEL) for asbestos is 0.1 fibers per cubic centimeter of air (f/cc) as an average eight hours per day, forty hours per week allowable limit.

The U.S. Environmental Protection Agency (EPA) has recommended a "clean air" level defined as that level at which the EPA recommends that a location can be "released" for general use or inhabitancy following an asbestos abatement project. The current EPA recommended clean air level is 0.01 f/cc for Phase Contrast Microscopy (PCM) and 70 s/mm² for Transmission Electron Microscopy (TEM).

III. TOXICOLOGICAL HAZARDS OF ASBESTOS

Asbestos can cause a lung condition called asbestosis in which the patient exhibits restricted lung capabilities. Symptoms include abnormal respiratory sounds, clubbing of the fingers, difficulty in breathing, a dry nonproductive cough and bluing of the skin. The condition is progressive. This means that even though the worker has been removed from the exposure, symptoms will worsen until labored breathing taxes the heart, resulting in death. Onset of symptoms may develop fully within 7 to 9 years, and the worker generally has 8 to 30 years to live, depending on the severity of the case.

Asbestos may also cause lung cancer and mesothelioma (cancer of the lining of the lungs). Both may result at levels of exposure, which are well below those known to result in asbestosis.

IV. AIR SAMPLING PROCEDURES

Troy Hawthorne collected area air samples. PCM samples were collected on 25mm diameter 0.8-micron pore size mixed cellulose ester filters housed in open face cassettes equipped with 50mm conductive extension cowls.

Troy Hawthorne collected clearance air samples. Clearance samples were collected on 25mm diameter 0.45-micron pore size mixed cellulose ester filters housed in open face cassettes equipped with 50mm conductive extension cowls.

V. AIR SAMPLING RESULTS

Sample locations and results are listed in the table below.

Sample Number	Location	Sample Results
122220H11	Lab Blank	<7.0 fib/mm ²
122220H12	Field Blank	<7.0 fib/mm ²
122220H13	Outside Office 113 Decon Entrance	<0.005 f/cc
122220H14	Office 113 Neg Air Exhaust	
		<0.005 f/cc

Clearance Air Sample Data:

Sample Number	Location	Sample Results
122020H16	Lab Blank	Not Analyzed
122020H17	Field Blank	Not Analyzed
122020H18	Room 113 clearance	No Asbestos Detected
122020H19	Room 113 clearance	No Asbestos Detected
122020H20	Room 113 clearance	No Asbestos Detected
122020H21	Room 113 clearance	16 s/mm ²
122020H22	Room 113 clearance	No Asbestos Detected

VI. CONCLUSION

Based on the visual inspection and area air sample results, the work area was released to the Owner.

APPENDIX FIELD SHEETS & CLEARANCE RESULTS

Date: 12-22-20		20046				NN L. WI			Analytical Method: N ZoSH 7400			
Project: Pupil Appra		e Number	-113		CONSULTING ENGINEERS, INC.				Cassette Lot #: 5 1590			
Prepared by: Troy Haw						O. Box 83 Rouge, LA			Sample Media: 25 MM PCM			
Analyzed by: Troy Haw	thorne				(2:	25) 761-91	41		Notes:			
Checked By:				Air Sample Log								
Calibration Method: Rota	meter					4.9.50.04						
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	Sample Identification/information	Result		
122220 411	_	_	-	_	_	_	_	_	Lab Blank	7.0	FIMI	
122220H12		_	-	_	_	-		_	field Blank	7.0	5/m.	
122080Ht3	303	10:25	3:41	316	2.00	2.00	2.00	632	Ols office 113 Decon Entrance		2/10	
122220H14	501	10:25	3:41	316	2.00	2.00	2,00	632	Office 113 Neg. Air Exhaust	€0.005	9/10	
				1								
									,			
										4		
-												

Activity Documentation


Project Name: Pupil Appra Client Name: CPSB	Date: 12-22-26 Project No.: 20-44	WYNN L. WHITE CONSULTING ENGINEERS, INC.
	Activity	
-0930 : Arrived on sit	to onew is still preping	
-1025: The area has	to crew is still propping finished propping setting. te to pick up puops.	. 1
-1541. Armed on 5	to be interpring serving	and once pump
in the state of th	to Be fack up Drays.	
4	8	The state of the s
•		
1.00		
Prepared by:	Date: 12-22-20	
Checked by:	Date:	. Form 14

Project: Pupil Appraisal Office Prepared by: Tray Hawthorne Analyzed by: EMSL Checked By:			WYNN L. WHITE CONSULTING ENGINEERS, INC.					Analytical Method: NZcsH 7402 Cassette Lot #: 2/356		
				P.C Baton F	D. Box 83 Rouge, LA 25) 761-91	527 A 70884		Sample Media: 25 MM TEM Notes:		
					Sample			PRI 70		
Calibration Method: Rotoms	iter					4.9.50.04			v 1.00 gr	
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	Sample Identification/information	Result
122320HZ3	-	_	_	-	7-	-	_	-	Lab Blank	
122320H 24	_	_	-	_	-	-	_	-	Field Blank	
1223201-125	Pso19	2:15	4:15	120	10.0	10.0	10.0	1,200	Office Number 113	
122320426	518	2:15	4:15	120	10.0	10.0	10.0	1,200	Office Number 113	
1223201+27	611	2:15	4:15	120	10.0	10.0	10.0	1,200	Office Number 113	
122320 4 28	476	2:15	4:15	126	10.0	10.0	10.0	1,200	Office Number 13	
122320429	612	2:15	4:15	120	10.0	10.0	10.0	11200	Office Number 113	
									9	
									and the second of the second o	
									est state of the s	

Activity Documentation

Project Name: Client Name:	Pupil Appraisal CPSB	Date: /2-23-20 Project No.: 20046	WYNN L. WHITE CONSULTING ENGINEERS, INC.
		Activitý	
-0730: Arrive	ed on site Crew is	ready for a visual	
0933 . Visho	1 Desses will beave	, and return to run a	learance
1410: Arrived	back to set up	cleurunes	
1415; Clearen	nce storted		
1455: leavin			
1510: Returne	I to site		
1615: Clearance			
			9
· ·			
•			
All control of the co			
repared by:	2- 44	Date: _/2-2:3-20	
hecked by:	1	Date:	Form 14

. Form 14



EMSL Order: 252006187 Customer ID: WYNN50

Customer PO: Project ID:

Fax:

Attention: Chris White Phone: (225) 761-9141

Wynn L. White Consulting Engineers, Inc.

PO Box 83527 Received Date: 12/24/2020 08:30 AM

Baton Rouge, LA 70884-3527 Analysis Date: 12/24/2020

Collected Date: Project: 20046

Test Report: Asbestos Fiber Analysis by Transmission Electron Microscopy (TEM) Performed by EPA 40 CFR Part 763 Appendix A to Subpart E

Sample	Location	Volume (Liters)	Area Analyzed (mm²)	Non Asb	Asbestos Type(s)	#Structu ≥0.5µ < 5µ		Analytical Sensitivity (S/cc)		estos ntration (S/cc)
122320H25		1200.00	0.0645	0	None Detected	0	0	0.0050	<16.00	<0.0050
252006187-0001										
122320H26		1200.00	0.0645	0	None Detected	0	0	0.0050	<16.00	<0.0050
252006187-0002										
122320H27		1200.00	0.0645	0	None Detected	0	0	0.0050	<16.00	<0.0050
252006187-0003										
122320H28		1200.00	0.0645	0	Chrysotile	1	0	0.0050	16.00	0.0050
252006187-0004										
122320H29		1200.00	0.0645	0	None Detected	0	0	0.0050	<16.00	<0.0050
252006187-0005										

Analyst(s)					
Jurnee	West (5)				

Jamie Laginess, Laboratory Operations Manager or other approved signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. Measurement of uncertainty available upon request.

Samples analyzed by EMSL Analytical, Inc. Baton Rouge, LA NVLAP Lab Code 200375-0, LELAP 01950, TX 300238

OrderID: 252006187



For O	ce Use Only:
Project Mgr:	
Accounting:	
Project File:	

CHAIN OF CUSTODY

PROJECT DATA		SHIPPING DATA		LABORATORY			
Project No.(s):	Samples Ship	ped via:		Name: EMSL Analytical, Inc.			
20046	<u></u>	Hand		Address: 18369 Petroleum Drive			
: 							
Samples Collected by:	Date Relinquis	shed to Shipper:		City, State	, Zip Baton Ro	uge, LA 70809	
Tray Hawtherm	N/A	\		Samples I	Rec'd by: \\u00edu	:GgOs	
					$\mathcal{O}_{\mathcal{L}}$	Signature	
Date: /2-23-20					ived: 12 2 4 2	0 8:30 AM	
		SAMPLEIDE	NTIFICATIO	N .			
123201123	<u>Lo</u>	h Blank				<u> </u>	
122320 H 24		12 Blenk					
122320H25		D VO((4)	<u> </u>				
122320 H26		Val (L)	<u> </u>				
122320 H 27		val (L)	<u> </u>				
122320 H 29		Val (L)	<u> </u>				
122320 H 25	1,20	VOI (W)					
<u> </u>							
····			<u> </u>				
	<u> </u>						
<u> </u>	_						
	_						
		CIAL CONDITION	S OR COM				
Analysis:		7082 Lead			Mold Air-O-Cell		
	PCM	TCLP Metal	s		Nold Agar Plate		
	PLM	Ll Other:			lold Bulk or Swa		
Methamphetan	ine by GC/MS	Special Detection	Limit Req:		.5 ug/wipe ——	0.1 ug/wipe	
						,,	
Requested Turnaround:	7 Day		4 Hour		Other_6 /	Trus-	
<u></u>	3 Day		Same Day				
	6-10	Day 2	24-48 Hour				
otal Number of Samples:	'		d +1			11.45	
Comments/Instructions: P/	ecsc. cont	act christ	hite u	1: 44 1/c	1501 (225)	495-6626	
 ·				 -			
CND DECLIFORD	-bit-Ou	is some AUD fortill d	D				
END RESULTS TO: cu	winte@wynnwhit	e.com AND dwhite@	wynnwnite.	.com	Doot	Office Box 83527	
		<u> </u>				, LA 70884-3527	

Environmental Engineers

Voice Mail (225) 761-9141 Fax No. (225) 761-4450



January 6, 2022

Mr. Mark Sutton Calcasieu Parish School Board 3800 Mallard Cove Drive Lake Charles, LA 70615 (sent via email)

RE: December 9-17, 2021 1618 Mill Street Asbestos Air Sampling and Clearance

21036

Gym and Kitchen / Storage

Dear Mark:

I have enclosed the analytical results for the asbestos air sampling and clearance air sampling Jeffrey Johnson, accredited asbestos supervisor, collected December 9-17, 2021. This report is for your review and files.

Jeffrey Johnson analyzed the asbestos area air samples using Phase Contrast Microscopy (PCM). EMSL Analytical, Inc. of Baton Rouge, LA analyzed the asbestos clearance air samples using Transmission Electron Microscopy (TEM). Sample data, locations, and results are attached to this letter.

The area sampled included the gym and kitchen / storage.

Asbestos clearance air sample results were below EPA recommended clearance level of 70 s/mm². Therefore, the areas were released to the Owner.

If you have questions or would like to discuss the project, please call me at (225) 761-9141 extension 1.

Very truly yours,

Wynn L. White Consulting Engineers, Inc.

Wyng White, P.E.

Pre**s**ident

Enclosures: Asbestos Air Sample Logs 12/9/21, 12/10/21, 12/13/21, 12/14/21, 12/15/21,

12/16/21, 12/17/21 and EMSL Analytical, Inc. Report 252107893

Voice: (225) 761-9141 Fax: (225) 761-4450 www.wynnwhite.com

Date: 12.9-21	Project No.:	21036				VN L. WI			Analytical Method: NIOSH 7408			
Project: 1618 Mills St (CPSB ASSOSSMENT Bldg) Prepared by: Ochwison						CONSULT ENGINEERS	, INC.		Cassette Lot #: 2550/			
				P.O. Box 83527					Sample Media: 25 mm 3 R NO. 8 cm mce			
Analyzed by: Jerray Joh	NSON				Baton I	Rouge, L <i>A</i> 25) 761-91	70884 41		Notes: A 55855 ment Add 9 pipil			
Checked By: CHUS	-ANTE					Sample						
Calibration Method: Rotamet	ac 2017 C	PZ				4.9.50.04			(1618 Mill St.)			
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	Sample Identification/information	Result		
12092151		-				-			lab Blink Flow	7-0		
12092152	_				_		-		Field Black Flor	7.0		
12092153	21-1001	10:05gm	4:30 am	385	2.0	20	20	770	dear whay "two	10.007		
12092154	21-1002	10:06 am	4:30am	384	2.0	2.0	2.0	768	East neg sie exhaust /100	40.007		
12092155	21-1003	10.07am	4:31 am	394	2.0	2.0	20	768	North and gotted braziere 1/00	60.007		
				-								
						ъ						
							,					

WYNN L. WHITE	Project No.:	21036	Date: 12.9.21	
CONSULTING ENGINEERS, INC.		Insul tech		
**** ENGINEERS, INC.		assessment BI	da 9 Pupil 1618.	MillSL
(225) 761-9141	Contractor S		Mosex Yorder	
	Form 4.9.50.	05	1	-
Can Actived on site at 161		/	Moses Yoder at	
assessment Bldy con still	preping su	tendosupe s	hould be ready For	2
remaral in 2 Has.			/	
Tan cour still preging andow	a For remix	41		
Eam cow duxt Finished paysing	7			
Jam onew Still preging endosine	should Be	andy Formen	sal in nother House	
10:03 am can started remong F		/		
neg min exhaust ok sta				
11 m mananeta 003				
12pm lunch Cause				
1 pm can Standed Back work	King			
1:30pm pumps and casselles a	/			
2-30 pm crew still remain F.T.		60031 000	ne andot)	
veg siz exhaut (ak)	(us majore)	
3.30 pm com Frished removing	all Elast	de inche a frie	of about the an cham	4
up deboic and about to	/		as you say are crans.	9_
			[5/c]	
- mangretor 0.00, all p		. / //		
9.30 pm Stopped All pumps	CREAT TA ONE	PORTREDAY		
deposted from 106 site				
<u> </u>	1 0			
·	A Company of the Comp			
				-
Coffing John			12.9.20	
// Prepared by:			12 · 9 · 20 Date	_
CHUS LYDE			12/11/21	
Checked by:			Date	

Date: 12-10-21	Project No.:	21036			1	N L. WE	The state of the s		Analytical Method: NIOSH 7400		
Project: CPSB Assessment Bldg				CONSULTING					Cassette Lot #: 25801		
Prepared by: Offfare Johnson				P.O. Box 83527					Sample Media: 25 mm 3pc w 10.8 mme		
Analyzed by: Seffan C	dusan				Baton F	Rouge, LA 25) 761-91	70884 41		Notes: Assessment Bldg 9 pupil	MPRE	
Checked By:	HNE					Sample			here was		
Calibration Method: Rofamet	Le 2017	42				4.9.50.04			(1618 mill 94)		
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	Sample Identification/information		Result
12102171		_	_	-	-	-	-	_	lab Black	Form 2	7.0
12102172		_			_		-		Field Blank	F/m2	7.0
121021 53	21-100(6:10 am	2:30pm	500	2.0	2.0	2.0	1000	decon entay	3/100	60.006
12102154	21-1002	6:11 am	2:31 pm	500	2.0	2.0	20	1000	East ug sie exhaust	9,00	10.006
(21021 55	21-1003	6:12 am	2:32 pm	500	2.0	20	2.0	1000	North end critical Bracias	%00	co.006
			,								

WYNN L. WHITE	Project No.: 21036	Date: /2-/0-2/
CONSULTING ENGINEERS, INC.	Client: CP3B /	Insultech
VTTT ENGINEERS, INC.	Location: Assessment	Aldin
(225) 761-9141	Contractor Supervisor: Form 4.9.50.05	Mess Yaler
6:10 an Stranfall pel monstoles of		to another wheel I all
Neg mil exhaut & endour		
	<i>'</i>	0.05
7:10 an funps are por man		HII working
	eten 0.37 pulosum	and regaring expenses accor
Yan maneter 0.03, purps		
10am crew Still removing mast	is and Conging purps	or)
Man craw stop to take break	4	
12pm can started Back will	leng	
Ipm neg mnexhanst lok)	pares de crawsfill,	serving mastic
	lay, stopped all pur	105
	1' //	
	1	
	,	
Jeffey Tohnson		12.10.21
Prepared by:	_	Date
CHERS NATE		12.10.21 Date
Checked by:		Date

Date: 12-13-21	Project No.:	21036				W L. W			Analytical Method: NIOSH 7400	,	
Project: Assessment Bldg (1618 Mills of)				CONSULTING ENGINEERS, INC.					Cassette Lot #: 2590/		
Prepared by: Jeffacy So.	Krisan					D. Box 83			Sample Media: 25 mm Zpc 0.8 pm Mce		
Analyzed by: Jerray Jak	nsay				(22	Rouge, L <i>l</i> 25) 761-91	141		Notes: Assessment catal		
Checked By: CHEIS W	HITE				Air	Sample	Log		(F.T. Removal mastic)		
Calibration Method: Colombia 2017 LP2					4.9.50.04			(1. 12 MOSATE)			
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	Sample Identification/information	Result	
12132151			-	_					Ide Black Flora	7.0	
121321 52	_	_		-	-				Field Blook Flora	47.0	
121321 53	21-1003	7:40 am	4:30 pm	530	2.0	2.0	20	1060	Secon entray Tico	40.005	
12132154	21-1004	7:41 am	4:31 pm	530	20	2.0	20	1060	Want Barrent Burgiere 200	40.005	
12132175	21-1006	7:42 am	4:32pm	930	20	2.0	2.0	1060	South neg are exhaust 4100	-0.005	
			,						/		
N. Charles											
			7								

WYNN L. WHITE	Project No.: <u>2/036</u>	Date: 12-13-21
CONSULTING ENGINEERS, INC.		rish School Board
Titt ENGINEERS, INC.	Location: Assassmant Bldg	
(225) 761-9141	/	Moses Yada
- /	Form 4.9.50.05	July 64
5:30 am Separted From Home		
7:31 am Accord of job Tile		
Titoan Sported ple purps craw be	Deposing mastic From Floor	, mauriles oct peg
sig about (ok)		
8:25 am cour still convery 10	ste veg nicextant bk	pumps are of
9:30 am veg in what or co		
10:30 an whiches are can sti	/	menoreter 037
all purps Anelok)		
12 pm crew Stopped For lund	book	
I por cras sont lack working		,
2pr pumps are of crew on	· ·	en edual
3 pm nig me exhaust all a		- A - C - C - C - C - C - C - C - C - C
4 pm negative a/2 exhaust 6/6		unice C.C.>
4:30 pm Stepped All purps coa A		
and the same and	potal Fram job Site	
		·
·		
· · · · · · · · · · · · · · · · · · ·		
Jeffay Jahren		12.13.21
Prepared by:		Date
CHEIS NHITZ		12/27/21
Checked by:	-	Date

Project: Assessment Ada (1618 Mills St.) Prepared by: Section School				WYNN L. WHITE CONSULTING ENGINEERS, INC.					Analytical Method: N/054/74000		
					VVV	ENGINEERS	S, INC.		Cassette Lot #: 05801		
									Sample Media: 25 mm w 10.8 pm mce Folter		
Analyzed by: Jestay do	lusar				(2:	761-9 (25)	4 70884 141		Notes: Assessment center		
Checked By: CHOIS wt	TITE					Sample					
Calibration Method: Lot making 201742					4.9.50.04			(mostic senaral)			
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	Sample Identification/information		Result
12142131			_	_	-			_	late Blank Fl.	1 2 L	7.0
12142152		_	_	_	-		=	-	Field Bank Fl.	ma e L	7-0
12142173	21-1001	6:15 am	4:30 pm	615	2.0	2.0	20	1230	Secon entres	100	20.004
12142154	21-1002	6:16 am	4:31 pm	615	20	2.0	2.0	1230	North ceitical Engine	2/100	cay
12142155	21-1003	6:17 am	4:32	615	2.0	2.0	20	1230	South my pic exhaut		-0.004
			,								
	-										
											,
							74				
· · · · · · · · · · · · · · · · · · ·											
*.											
				,							
							,		. '		

WYNN L. WHITE	Project No.: _2/236 Date: _/2.14.2/
CONSULTING ENGINEERS, INC.	Client: OBB
VIII ENGINEERS, INC.	Location: Assistent Bldg. 1618 mills St
(225) 761-9141	Contractor Supervisor: Nova Yodan
	Form 4.9.50.05
6 m Appind on site	
6:15 an Shorted Al / mon loss con	
enclorus, poly is sales	lot on enclosing properly no thous detatel
neg sie exhaust Functioning	property, manneter
1:30am crew Still serving moss	tic manarates 0.01
B'30am CREW Shill Bemoury MAS	the pumps & veg sin about ole
9:15 an checked purps at none	
10 m veg sis exhaust ole puny	
Han monanter 0.09 pages	(at) very min extensel are
12pm / wich Goesk caw stype ped	usking
Ipo com storted Back wordery	
are water properly	
Ipm page (old manameters o.	03, vy me exhaust (ell)
3pm crew Finished renary	
Bags From contrivement,	
4:30 pm Stopped All purps a	ew Firsted from the day
TH T	
Prepared by:	<u> </u>
72 (12/27/21
Checked by:	
Ollecked by.	Date

Date: 12-15-21	Project No.:	21036			WYI	NN L. WI	HITE					
Project: Assistment Bldg Prepared by: Ottory Odnson Analyzed by: Ottory Odnson				ENGINEERS, INC.					Analytical Method: N/OSH 7400 Cassette Lot #: 25301			
									-		25) 761-9 [,] Sample	
				Calibration Method: Kotandag 2019 42				Air Sample Log 4.9.50.04				
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	Sample Identification/information		Result	
12152151				-			_	-	lab Black	Flmm ²	47.0	
121521 J2			7.	_	-			_	Field Bank	Flam 2	4 7.0	
12152103	21-1001	6:30 gm	4:30 pm	600	2.0	2,0	2.0	1200	decon enter	4/100	40.005	
(2152/04	21-100	6:30 am	4:30 pm	606	2.0	2.0	2.0	(200	North critical Engine	%	40.005	
12152175	21-103	6:31 am	4:31 pm	600	2.0	20	2.0	1200	South un sie exhaust	9/100	60.005	
										4.		
										-		

WYNN L. WHITE	Project No.: <u>21036</u> Date: <u>12-15-21</u>
CONSULTING ENGINEERS, INC.	Client: CPSB (Incul tech contractor)
FIFT ENGINEERS, INC.	Location: Assessment Bldg (Gym)
(225) 761-9141	Contractor Supervisor: Mases Yodek
	Form 4.9.50.05
6 an Assould on gite	
le:30 an cour fortal Fine cha	exing enclosine, startal All pumps, mounder 0.09
Sam creen Shill valording Bage Farm	rentorua ; maranetas 0.03, propos à regaine
exhart are Functioning prog	nedy.
gan coar Frickel praing Bags 1	Team melerua, purps ok, way on whoms tok
manumeter 0.037	
ICAM CROW Fire cleaning corners.	of gym, manster 0.05 pumps & new six when stok
Man mountere 0.04 pun	cole coas stillusation
12 pm lunch Coresk	
1 pm caw strasted Back Fine C	Leonin .
Syon and pups on manufer	0.65
	Racks & Boxes From Strange graces
4:30 on Spand All Numes (1842)	dire trall day
- The state of the	port for the crop
· · · · · · · · · · · · · · · · · · ·	
Celly Oshvson	12.15.21
Prepared by:	
CHELL WHITE	12/27/21
Checked by:	D.4

Date: [2, 16-2]	Project No.:	21036				NN L. WI			Analytical Method: NIOSH 7400	,	
Project: Assessment 13	ldg				VITT	CONSULT ENGINEERS	I ING 5, INC.		Cassette Lot#: 25801		
Prepared by: Of-Trag	chusin	4.				O. Box 83			Sample Media: 25 mg 3 mg 3 mg 8 mg 8 mg 8 mg 8 mg 8 mg 8	u MC	
Analyzed by: Jeffray J	oprison				(22	Rouge, LA 25) 761-91	141		Notes: a sessment Bldg	The True	
Checked By: CHE'S WH	176				Air	Sample	Log		Notes: assessment Bldg Stoage acom & astrown men MASTE & F.T.	7	
Calibration Method: Kolameta	en 2017	LP2				4.9.50.04	ļ		LMASK & F.T.		
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	0		Result
12162151			-					_	lab Blook	r/ 2 e	Floc
12162172	_	-							Field Blank	Flow	7.0
121621 J3	21-1001	1:05 pm	4:30 pm	205	2.0	20	2.0	410	East and control bearing	0/	7.0
121621, T4	21-1002	1:06 pm	4:31 pm	205	2.0	2.0	2.0	410	North my is exhaust	0/	40.013
12/62/55	21-1003	1:06pm	4:31pm	205	2-0	2.0	2.0	410	South Neg Air extract	9100	40.013 40.013
		,	,						The correction of the correcti	1106	0.013
										*	
										-	
							-				
					,						
		7.									
									·		
										`	

Activity Documentation Worksheet

WYNN L. WHITE	Project No.: <u>21036</u> Date: <u>12.16-21</u>
CONSULTING	Client: Assessment Bld (gym, Storage Rom) CRS
ENGINEERS, INC.	Location: Assessment Alda
(225) 761-9141	Contractor Supervisor: Nosas Valee Form 4.9.50.05
6 an Account on pol site	101111 4.5.50.05
	begge can area and will stand penaing sow as they
Finish	
Tam CREW Still proping en	losupe (or sportlye)
8:30m CRUW Still priping es	
9:30 cow still proping and	
10:30 am on Stondbye	
11:15 am CREW Almost done	preping enlowe
Opa Juneh break	/
1:05 pr crew stands remains 1	TI a mastre inside storage pam and Restman
- Standad All pung, in m	
April cour still walking monare	
3pm onemarker 0.05	cays (ble)
4 pm crow Stillnessing mast	
	day Staged All pages.
·	
	· · · · · · · · · · · · · · · · · · ·
(T// T/	12.17.21
Prepared by:	Date
CARIS WHITE	Date 12/27/21
Checked by:	Date

Date: 12.17.21	Project No.:	21036				VN L. WI		-	Analytical Method: NIOSH 7400	
Project: Assessment Bldg					VAL.	CONSULT ENGINEERS	S, INC.	•	Cassette Lot #: 2580/	
Prepared by: Jeffsey John	vson .	******				D. Box 83			Sample Media: 25 mm 3 pc w 10.8 mm	
Analyzed by: Cerray Osh	I V SON					Rouge, L <i>l</i> 25) 761-91			Notes: Assessment Bldg.	
Checked By: CHOVS	white				Air	Sample	Log		Notes: Assessment Blog. (Strenge Room & Butheron mastic amount)	
Calibration Method: Rofame fee	e 2017 CF	2	1			4.9.50.04			(Starting Resolm (V) Al Riper (1881 STE RESOLUTION)	
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	Sample Identification/information	Result F/ce
12172151	_	_	_	_	_	_	_	_	106 Blanke F/ 36	
12(7)2(5)2	_	_	_	_			_	against the same of the same o	Field Blank Flmm 26	
12172153	21-1001	6:30 an	10:30an	240	2.0	2.0	20	480	- 110	40.011
1272154	21-1002	6:30 an	10:30 an	240	2.0	2-0	2.0	480	North my me whomes 9100	40.011
12/12/ 15	21-1003	6:31 am	10:30 am	240	2.0	2.0	2.0	480	South my me whomes Two	40.011
			r							
							*			
	, .									
						-	,			
					И	*				
									· · · · · · · · · · · · · · · · · · ·	

				T	1407	10.1.1				
Date: 12-17-21	Project No.:	21036		_		<u> </u>			Analytical Method: North 240 Z	
Project: Assessment Bld	4				VTT	CONSULT ENGINEERS	I ING 5, INC.			
Prepared by: Seffacy John	VSON	q.				D. Box 83			Sample Media: 25m 3m W/ 115m + 50	
Analyzed by: EMSL						Rouge, L <i>l</i> 25) 761-91			Notes: Agreement Cillian C	
Checked By: Chrz Sut	TITE		,			Sample			Pressmall Ballating Gym, Storage Restroom	h-149 -
Calibration Method: Lofonoke	HP 201	7				4.9.50.04			Sample Media: 25 mr 3 pc w/ 45 pm + 5.0 mce Notes: Assessment Building Gym, sterage Ristram (Final Clearance) NOTA NO	40100
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)		Result
121721 56	-	_	_				_		Talo Blask	4.4.4
[21721J1		_		-		_			Field Blank	NA
12172178	/	1:30 pm	3:30 pm	120	10.0	10.0	10.0	1200	North and of gym	ND
121721 J9	2	1:30 pm	3:31 pm	121	10.0	10.0	10.0	1210	Clarker end of gym	ND
121721510	3	1:30 pm	3:33 pm	123	10.0	10.0	10.0	1230	South end of gym	NA
121721 J11	6	1:31 pm	3:34 pm	123	10.0	10.0	10.0	1230	Strange Down ARCA	ND
121721512	8	1:31 pm	3:36 pm	125	10.0	10.0	10.0	1250	Ristagon queA	ND
		,		-			1	. /		
					3		,		`	
				,						
								,		

Activity Documentation Worksheet

WYNN L. WHITE	Project No.: <u>2/036</u>	Date: 12.17.21
CONSULTING ENGINEERS, INC.	Client: CP5B	
TTTT ENGINEERS, INC.	Location: Assessment Bldg	
(225) 761-9141	Contractor Supervisor:	Moses Yalon
	Form 4.9.50.05	TOJIS TO PIC
6:30 am Strated All parts, come	Egin serving mastic & Floor tile	manumeter 0.35
Em cou still working, pung	05 et mansmeter 0.35	
Tam counstill pensong mostic	manuelez 0-03	MASS EXPLOSE OR
10:30 am now Frished with job	Stopped all Purps	
10.42 m del visual craw mission	13 soots note then so But	le ouro
11:15 an Crew locked four me		2 use
		C Ales
1:18 po Strapled punning cleur		A CONTRACTOR OF THE CONTRACTOR
2:33 pm checked groups & C		
3:80 pm Finidal Range de	some Stopped purps f	extent up grace
	Fredrick sik superior	
3:40 pm deponted From Lo	the Charles Staded to Be	ten longe
6pm drapped suples OF	AT EMSL	
· · · · · · · · · · · · · · · · · · ·		
T/ -/		
Jeffing John		2.17.21
/ Prepared by:		Date
CHUSUHIR		12/27/21
Checked by:		Date



EMSL Order: 252107893 Customer ID: WYNN50

Customer PO: Project ID:

Fax:

Attention: Chris White Phone: (225) 761-9141

Wynn L. White Consulting Engineers, Inc.

PO Box 83527 Received Date: 12/19/2021 13:45 PM

Baton Rouge, LA 70884-3527 Analysis Date: 12/19/2021

Collected Date: Project: 21036

Test Report: Asbestos Fiber Analysis by Transmission Electron Microscopy (TEM) Performed by EPA 40 CFR Part 763 Appendix A to Subpart E

Sample	Location	Volume (Liters)	Area Analyzed (mm²)	Non Asb	Asbestos Type(s)	#Structu ≥0.5µ < 5µ		Analytical Sensitivity (S/cc)		estos ntration (S/cc)
121721J8 252107893-0001		1200.00	0.0645	0	None Detected	0	0	0.0050	<16.00	<0.0050
121721J9 252107893-0002		1210.00	0.0645	0	None Detected	0	0	0.0049	<16.00	<0.0049
121721J10 252107893-0003		1230.00	0.0645	0	None Detected	0	0	0.0049	<16.00	<0.0049
121721J11 252107893-0004		1230.00	0.0645	0	None Detected	0	0	0.0049	<16.00	<0.0049
121721J12 252107893-0005		1250.00	0.0645	0	None Detected	0	0	0.0048	<16.00	<0.0048

Analyst(s)

Jamie Laginess (5)

Jamie Laginess, Laboratory Operations Manager or other approved signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. Results reported in structures/cm3 are not covered by the laboratory's NVLAP accreditation. Measurement of uncertainty available upon request.

Samples analyzed by EMSL Analytical, Inc. Baton Rouge, LA NVLAP Lab Code 200375-0, LELAP 01950, TX 300238



CHAIN OF CUSTODY

PROJECT DATA			SHIPPING DA	ATA			LABORATORY	
Project No.(s): 2036	Sam	oles Shi	pped via:			Name:	EMS	L
						Address:	18369 Petrole	eum Drive
								,
Samples Collected by:					_	City, State, Zi	p Baton Rouge	, LA 70809
Vittari Clahrison			·			Samples Rec	d by: of Lagra	ú5.
/							0.0	Signature
Date: /2-17-2/						Date Received	1: 12/19/21	1:45 pm
			SAMPLE	IDEN	TIFICATION	J		
12172156		106 3	lank					
121721 77		Field B	Blank					
12172178		1200 v	116					2
12170179		1210 V	014			<u> </u>		
101721510		1230 1	0L					
121721511		1230 0	014					
121721 712		1250 4	10/4					
								
			<u> </u>					
<u> </u>		,			<u> </u>			
					<u> </u>		<u> </u>	
							_	
<u> </u>					<u></u> .	<u> </u>		
					<u> </u>			
					<u> </u>			
								** ***
			ECIAL COND					· · · ·
Analysis:	TEM		7082 Lead	•		Mold Air-O-Cel	l Volume:	
	<u> PCM</u>		TCLP Metals				e or Rodac Plate	€
	J PLM		Other:			Mold Bulk or S	wa <u>b</u>	
Methampheta	mine by	GC/MS	Special Dete	ction Li	mit Req:		ug/wipe	—0.1 ug/wipe
Requested Turnaround:			Day		24 Hour		Other 6 Hes	·
· · · · · · · · · · · · · · · · · · ·			Day	<u> </u>	Same Day			
		<u> </u>	-10 Day	<u></u>	24-48 Hour	<u>- </u>		
Total Number of Samples	7					_ -		
Comments/Instructions:		•						
								<u> </u>
OFNID DEOL!! TO TO				· - ··-	<u> </u>			·
SEND RESULTS TO:							m 4.9.80	לים מו מים מים
	cwhite	<u>:@wynn</u>	white.com, dwh	ite@w			Post Off Raton Rouge 1 A	ice Box 83527

Environmental • Health • Safety Engineers • Traininers • Consultants DropBex

Post Office Box 83527 Baton Rouge, LA 70884-3527 Voice Mail (225) 761-9141 Fax No. (225) 761-4450



November 4, 2021

Mr. Mark Sutton Calcasieu Parish School Board 3800 Mallard Cove Drive Lake Charles, LA 70615 (sent via email)

RE: July 26 – September 3, 2021 1618 Mill Street Asbestos Air Sampling and Clearance 21036

Dear Mark:

I have enclosed the analytical results for the asbestos air sampling and clearance air sampling Bakari Weiss, Lacy Palermo, and I, accredited asbestos supervisors, collected July 26 – September 3, 2021. This report is for your review and files.

Todd Peterson and Bakari Weiss analyzed the asbestos area air samples using Phase Contrast Microscopy (PCM). EMSL Analytical, Inc. of Baton Rouge, LA and Indianapolis, IN analyzed the asbestos clearance air samples using Transmission Electron Microscopy (TEM). Sample data, locations, and results are attached to this letter.

The areas sampled included:

- 1. Phase 1
- 2. Phase 2
- 3. Phase 3A

Asbestos clearance air sample results were below EPA recommended clearance level of 70 s/mm². Therefore, the areas were released to the Owner.

If you have questions or would like to discuss the project, please call me at (225) 761-9141 extension 2.

Very truly yours,

Wynn L. White Consulting Engineers, Inc.

Chris White, P.E. Vice President

Clo white

Enclosures: Asbestos Air Sample Logs 7/26/21, 7/27/2, 7/28/21, 7/29/21, 7/30/21, 8/2/21, 8/3/21, 8/4/21, 8/11/21, 8/12/21, 8/13/21, 8/16/21 and EMSL Analytical, Inc. Reports 162119066, 162120546, 252105419, 252105601, and 252105630

Voice: (225) 761-9141 Fax: (225) 761-4450 www.wynnwhite.com

		21036	618 M:1151		P.0	NN L. WI CONSUL ENGINEERS D. Box 83	TING 5, INC. 527		Analytical Method: NSOS # 7400 Cassette Lot #: 2/203 Sample Media: PVW 25 mm		
0110	2000				(22	Rouge, LA 25) 761-91	141		Notes:		-
Checked By: CHEIS wt	hR				Air	Sample	Log				
Calibration Method: Kotown	eter					4.9.50.04					
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	Sample Identification/information	Result	
072621207	_					/	(=,	voidine (inters)	< \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\		
972611c08	_			_			_		LEGING DONK	< 7.0	- Humz
07262169	21-1011	1030	0730	540	16	1.7	116	291	100 planx	<7,0	Amn 3
0726211810	2-1-1017.	1031	0731	540	1 (17	LIK	801	outside decon	<,003	Acc
07162/1911	21-1013	1032	0732	200	100	17	165	100	outside containment Southern of	<,003	fice
0120111812	21-1014	1033	0733	540	1.0	17	1.00	/\	outside conterment North side of building	<,053	Fac
	21 1001	1000	0())	1,10	1.6	l.	1.65	811	outside exhaust	5,003	Ha
								4			
							E.				

Project: Prepared by: Analyzed by: Checked By: Calibration Method:	Hermo eson	2/036 -15 NH		-	P.0 Baton (2)	NN L. WI CONSULT ENGINEERS D. Box 83 Rouge, LA 25) 761-97 Sample 4.9.50.04	TING 5, INC. 527 A 70884 141 Log		Analytical Method: VIOSH 7400 Cassette Lot #: 2 2 2 3 Sample Media: 25 mm Notes:	
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	Sample Identification/information	1
072721100				-	1-		_	_	Lab blank <7.0	F/
072-7011 203	24-1001	0747	2200	1,73		17	115	21011	Field blank <7.0	7
0727216904	21-1002	0748	0700	(73	1.6	1.	1100	1110.42	lutside decor	7
0727211905	14-1003	0749	6701	673	1.0	17	1.60	1110,45	Outside containment South and of Hallway Coo2	F
07272/1206	21-7004	0750	0703	673	16	17	165	111045	Outside exhaust North side at building 5,002	4
			(0 / 0		1,4	111	(~~)	1110	ULTSIDE EXPONST 7,002	1
										1
										1
										-
										-
										-
										-
						is a second				

Date: Project:	Project No.:	2/03/			WY	NN L. W	HITE		Analytical Method: NIOSH 7400
Prepared by:	lermo					CONSUL			Cassette Lot #: 2 203
Analyzed by: Took Pet	ten				Baton	O. Box 83 Rouge, LA 25) 761-9	527 \ 70884		Sample Media: PCM 25mm Notes:
Checked By:	WHITE				رے Air	Sample	Log		Notes:
Calibration Method:	neter					4.9.50.04			Phase I alabar I
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	the tarement monitoring
072821 LPOI							(2)	voidine (liters)	6 11 11 16
0728214902						_			tield blank <7,0 f
972821 LP03	21-1001	0745	7:20p	635	1.60	1,6	1,6	1016	Cap Dlank (7.0 g
072821 LP04	21-1002	0746	7:21k	635	1.6	1.1	1/6	1016	d+1 deugn <1003 C
072821405	21-1003	0747	7:22n	635	[.[0	16	1.6	1016	Justice containment Southend of Hallway < , co 3 +
1/2821 LP06	4-1004	9748	7:23n	635	1,6	1.6	1.6	1016	Contribe containment North side of building COOZ
			0			1.0	1,0	10/6	Cananst 15,003 f

Date: 7/29/21 Project: 16/8 M	Project No.:	2/63	6	-		NN L. WH CONSULT ENGINEERS			Analytical Method: PCM NIOSH 7400 Cassette Lot #: 21203.	
Prepared by: CHUS N	HITE	SON			P.0 Baton I	O. Box 835 Rouge, LA 25) 761-91	527 \ 70884		Sample Media: ZS mm WCC F Notes:	
Checked By:				1		Sample				
Calibration Method:	METER)				4.9.50.04				
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	Sample Identification/information	Result
7292161	7001	718	408	530	1.5	1.5	1.5	795	HALLOURIDE DECON &	0.034/
7292102	1002	718	408	530	2.0	2.0	2.0	1060		0.024/
7292163	1603	718	403	530	1.5	1.5	1,5	795	OUTSIDE SHATTVEK CRITICALE	
7292104	7004	718	408	530	1.5	1.5	1.5	795	·	0.0341
				-						
					- 1					
									·	
1										

Project: 618 mm			P.(Baton I	NN L. WI CONSULT ENGINEERS D. Box 834 Rouge, LA 25) 761-91	TING 5, INC. 527 A 70884		Analytical Method: PCM NIOSH 7400 Cassette Lot #: Z 203. Sample Media: ZB MM MCEF Notes:			
Checked By: CHRIS	VAITE				Air	Sample	Log			
Calibration Method:	100)				4.9.50.04				
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	Sample Identification/information	Result
73021C1		agenting.	-		manus,	Service.	Marina	Mariney .	LAS BLANK	17.0
7302102				gyaldije.	wantish	descent	quality.	Aleman	FICLO BLANK	<7.0fi
7302163	7005	700	322	502	1.5	LIST	1.5	753	HALLE DECON WINDOW	< D. 03 F
7302/64	1364	700	322	502	1.5	45	1,5	753	OLS APD EXHAUST	<0.03
									TO CALIDON	-0.03
							,			

Project: \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	Project No.:	21036			WYI	VN L. WI CONSULT ENGINEERS	HITE TING 5, INC.		Analytical Method: PCM NIAS + 7400 Cassette Lot #: 23398.	
Analyzed by: Tro, Ha		ed**			P.0 Baton I	D. Box 83 Rouge, LA 25) 761-91	527 \ 70884		Sample Media: 25 mm M ()E Notes:	
0	SWHITE	in C			Air	Sample	Log			
Calibration Method: Kotam	neter	T	T			4.9.50.04				
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	Sample Identification/information Result	7
0807216901		_		_	_	_		_	Lab blank 7.0	F/mm2
0802211 PO2						· ·			Field Hank 7.0	0/100 F/mn
0802-21LP03	21-1006	0940	1725	465	1.8	17	1.75	813.75		F/mn 0/100 F/cc 2/100
080221LP04	21-1007	0941	1726	465	1.3	1.7	1.75	813.75		Elic
080221LP05	21-1008	0945	1727	465	1.7	1.7	1.70	790.5		F-7.
080221LP06	21-1009	0943	1708	465	1.7	1.7	1.70	7905	Exhaust Ko.003	F/C=
								,	0.5%	1/100
8				-						
									·	

Date: 8/3/11	Project No.:	2/036			WYI	VN L. W	HITF		NE coll Cite O		
Project: 68 M 1 5+						CONSULT ENGINEERS	TING		Analytical Method:		
Prepared by: Lacy Paler	mo				P.0	D. Box 83	527		Cassette Lot #: 23398 .		
Analyzed by: Troy Ha	withorn	_			Baton I	Rouge, LA 25) 761-91	70884	*	Sample Media: 25 mm MCE Notes:		
Checked By:	2+1+ m				Air	Sample	Log				
Calibration Method: Kotame	ter					4.9.50.04					
Sample ID Number	Pump#	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	Sample Identification/information	Result	
0203211201	_	_	_		_	^	-	Totalic (iters)	- Total Calabination		C.
0803211802		_							rab blank	7.0	61 mm
0803714903	21-10/1	0735	1425	410	17	1 8	175	7175	Field blank	1.0	0/100
08037/1904	21-1012	0736	1476	410	19/	1.0	1.10	111.5	Untside decon	FB.004 1	1ce
0803211.05	21-1013	0737	1417	1110	17	1-(1.67	016.5	Critical barrier/south end of hall	180,004 10	F100
0803211806	21-1014	0738	1112	1110	101	1:10	1.60	676.5	ritical parrier North side of building	ax 0.004 0	F/c0
	C1 1011	0750	1400	V(I)	1./	1.1	1.1	697.0	Exhaust	1000 F	F/66 01100
											1100
									·		

Date: 8/4/2	Project No.:	21036			WYI	VN L. WI	HTTF			
Project: 1010 Mall 5	+.	The second second				CONSULT ENGINEERS	TING		Analytical Method:	
Prepared by: \\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	ermo					D. Box 83			Cassette Lot #: 22946	
Analyzed by:	EMSL				Baton I	Rouge, LA 25) 761-91	70884	-	Sample Media: 75 mm MUE Notes:	
Checked By:	SWHITT	2.			Air	Sample	Log		MA = NOT ANAMISED	
K \	076h					4.9.50.04			ND ENONE BERNIEN	
Sample ID Number	Pump#	Time On	Time Off	Elapsed Time (min)		Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)		Result
1091154080		_			arriv.	-	(2.111)	voidine (liters)		
0204711.807.									Lab blank	NA
0804211803	0	0855	1155	100	8 5	1	0 1-		Field blank	NA
0804711914	11	0856	1156	100	0.5	20	0.5	1530	West Hall.	NO
ORDHILL 805		0857	1176	180	8.5	15	8:5	1530	West Hall	ND
0804711 Pal	1	0850	115/	180	15	77	8.5	1530	West Hall	ND
0804211807		0050	1159	180	X 5.5	85	80	1530	last there	ND
OFFILIPI	V	9059	1159	120	6.2	8.5	8.5	1530	South Hall	ND
	,									
					-					
									·	
•										


Date: 8-11-21		21036			MA	11111	ITTE			
Project: ASSESSME	Project No.:	1/1:		-	VVY	NN L. WI	TING		Analytical Method: NiOSK 7400	
	Weiss					CONSULT ENGINEERS	S, INC.		Cassette Lot #: 23398	-
Analyzed by: Bakar				-	P. Baton	O. Box 83 Rouge, LA	527		Sample Media: 25 mm PCM	-
Analyzed by: 5 areas	vH172				(2	25) 761-91	141		Notes:	-
Checked By:	VITITE				Air	Sample	Log			
Calibration Method: Rotan	neter					4.9.50.04			·	
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample	Result	_
081171BW17	302	8.00A-	4:40P2	520	1:80	1.80	1.80	Volume (liters)	Sample identification/information	
081121BW18	303	8:00A-	4:40P~	520	1.80	1.80		A	Deacon Entrance (Phase 34) <:063	Floc
081121BW19	304	8:00A~	4:40P_	520	2.00	2.00	2.00	936	Critical Barrier (Phase 3A) <1003	Flac
081121 BW20	305	8:35A~	1:00Pm	265	2,00			936	Negative Air Exaust (Phase 3A) <.003 Deaton Entrarce / Negative Exaust <.005	FICC
081121BW21				~	0,00	2,00	2.00	5 30	Deaton Entrarce / Negative Exuist 6.005	Flod
081121BW22	_	L-					-		Lab Blank KT.D	Frad
					-	· ·	-		Field Blank K7,0	Tai
									Elda	2
									1,40,40	1
										-
										-
										-
										-
										-
										_
										-
										_
	•									

Date: 8-12-21 Project: A 55655 Men Prepared by: Bakan	Project No.: By No.155	cildin	<u> </u>			NN L. W CONSUL ENGINEER	TING S, INC.		Analytical Method: NOSA 7400 Cassette Lot #: 23398.		
400	We75		J		Baton	O. Box 83 Rouge, L. 25) 761-9	A 70884		Sample Media: 25Mn Pcm		
Checked By: CHUS	什么				Air	Sample	Log		Notes: Phase 3A		
Calibration Method: Rota	meter			1		4.9.50.04					
Sample ID Number	Pump#	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal	Flow Rate	Sample			
081221BW1	1006	7:362	4:402	550	2.00	Rate	(LPM)	Volume (liters)	Sample Identification/information	Result	
781221BW2	1007	7:300	4:402	550	2.00	2,00	410	1100	Deacon Entry	(,002	厂
181221 BW3	1008	7:302	4:4012	550	2.00	2,00	000	1100	Critical Barrier	6.002	F
081221 Bw4	,	7150.00		000	0		2,00	1100	Negative Air Exaust	6.002	F
281221BW5		4			· -	-		_	Lab Blank	<7.0	F
			·						Field Blank	< 7. 3	1000
											-
											-
											-
-1											

									111 -11-0	
Date: 8-13-2(Project No.:	2103	0		WYN	IN L. WH	ILE		Analytical Method: NF65 L 7400	
Project: ASSESSMENT B	Suilding	(Mi	(1 street			CONSULT NGINEERS,	INC.		Cassette Lot #: 233 98.	
Prepared by: Bakari 1	Ne 185					. Box 835			Sample Media: 25 mm PCm	
Analyzed by: Bakari V	ve155				(22	Rouge, LA 25) 761-91	41		Notes: Dhase 3A	
Checked By:					Air S	Sample	Log			
Calibration Method: Rotan	neter					4.9.50.04				Result
Sample ID Number	Pump#	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	Sample Identification/information	Result
08132 (BW 8	1009	7:30A	3:10%	460	2.00	2,00	2,00	920	Denion Entrance	(0.003)
0013910W 8_	1010	7:30AL	371092	460	2.00	2,00	2.00	920	Critical Barrier	(0.003
08102113W 7	-	7:30A	3:10P_	460	*	2.00	2.00	920	Negative Air Expust	20.003
06/32(BW10	1011	1.301-	J	100		~			Lab Blank	(7.0)
08(32(BWH)						famour		-	FieldBlack	17.0
0813218412									Pilitario	AB
										1
							-			
										`
									·	

Date: 8-13-2(2/03	/		\\\\	VN L. WI	JITC		(0.3	
Project: ASSESS Mew	Project No.:	0100	5 (0 +	-	VIII	CONSULT ENGINEERS	TING		Analytical Method: NIOSL 7 402	
Prepared by: Bakari	1	airin	11 57,	-					Cassette Lot #: 2550.5	
~ ~ ~	Wers) /		-	P.0 Baton I	D. Box 83 Rouge, LA	527 \ 70884		Sample Media: TEM	
	. 1.1			-	(2:	25) 761-91 Sample	141		Notes: Final Elemance	
Checked By:	me te			-	AII	·	Ŭ		NA I NOT ANALYZED	
	riete	<u> </u>			T	4.9.50.04			ND = NONE DETECTED	
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate	Post Cal Rate	Flow Rate (LPM)	Sample Volume (liters)	Sample Identification/information	. Result
08/32(BW 13	1/	9:10Am	11:100	120	11,0	11.0	11.0	1320	Phase 2	ND
08/32/86/4	9	9:10 Am	11:000	120	11.0	11.0	11.0	1320	1	
08132(BW 15	10	9:10Aa	11:10pm	120	11.0	11.0	11.0	1320		ND
08132(BW16	7	9:10Am	11:10A-	120	11.0	11.0	11.0	1320		ND
08132(BW17	8	9:102	11:102	120	110	11.0	11.0	1320		ND
0813213618	Mauri	-	-			1110	111		1 . (D .)	1/2
08/32/BU19	_			4		V			Lab Blank	NA
010/1004								·	Field Blank	NA
	-									
						•				
				·						
					_					
						***************************************	-			

Checked By:	Project No.: 1. 1. 1. 1. 1. 1. 1. 1. 1.			WYNN L. WHITE CONSULTING ENGINEERS, INC. P.O. Box 83527 Baton Rouge, LA 70884 (225) 761-9141 Air Sample Log 4.9.50.04					Analytical Method: TFM Cassette Lot #: 25505. Sample Media: 15 mm M (F) Notes: WA NOTANALIZED NO NOTE CASSETTED			
Sample ID Number	Pump #	Time On	Time Off	Elapsed Time (min)	Pre-Cal Rate		Flow Rate (LPM)	Sample Volume (liters)	North hall clearance	Result		
08/62/LP08 08/62/LP09 08/62/LP10 08/62/LP10 08/62/LP13	12 13 P5013 P5019 1188	V103 1204 1205 1206 1207	1433 1434 1435 1437	150 150 150 150 150	\$.3 \$.3 \$.8 \$.8	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	8.8 8.8 8.8	1320 1320 1320 1320	Lab blank Field blank Hall Vay Hallway Library Break room	20 20 20 20 20 20 20 20 20 20 20 20 20 2		



EMSL Order: 252105419 Customer ID: WYNN50

Customer PO: Project ID:

Fax:

Attention: Chris White Phone: (225) 761-9141

Wynn L. White Consulting Engineers, Inc.

PO Box 83527 Received Date: 08/05/2021 09:55 AM

Baton Rouge, LA 70884-3527 Analysis Date: 08/06/2021 Collected Date: 08/04/2021

Project: 21036/1618 Mill St.

Test Report: Asbestos Fiber Analysis by Transmission Electron Microscopy (TEM) Performed by EPA 40 CFR Part 763 Appendix A to Subpart E

Sample	Location	Volume (Liters)	Area Analyzed (mm²)	Non Asb	Asbestos Type(s)	#Structu ≥0.5µ < 5µ		Analytical Sensitivity (S/cc)		estos ntration (S/cc)
080421LP03 252105419-0001		1530.00	0.0508	0	None Detected	0	0	0.0050	<20.00	<0.0050
080421LP04 252105419-0002		1530.00	0.0508	0	None Detected	0	0	0.0050	<20.00	<0.0050
080421LP05 252105419-0003		1530.00	0.0508	0	None Detected	0	0	0.0050	<20.00	<0.0050
080421LP06 252105419-0004		1530.00	0.0508	0	None Detected	0	0	0.0050	<20.00	<0.0050
080421LP07 252105419-0005		1530.00	0.0508	0	None Detected	0	0	0.0050	<20.00	<0.0050

Analysi(s)	
urnee West (5)	

Analyet(e)

Jamie Laginess, Laboratory Operations Manager or other approved signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. Results reported in structures/cm3 are not covered by the laboratory's NVLAP accreditation. Measurement of uncertainty available upon request.

Samples analyzed by EMSL Analytical, Inc. Baton Rouge, LA NVLAP Lab Code 200375-0, LELAP 01950, TX 300238




CHAIN OF CUSTODY

PROJECT DATA	SHIPPING DA	ATA] 1	ABORATORY
Project No.(s):	Samples Shipped via:		Name:	EMSL
1,1036		<u> </u>	Address:	18369 Petroleum Drive
1618 Mill St.	FRAEX			
Samples Collected by:			City, State, Zip	Baton Rouge, LA 70809
LauPalermo			Samples Rec'	d by: LBroke
1 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1				Signature
Date: トル / \\			Date Received	:8/05/21 @9:55an
	SAMPLE	IDENTIFICATION	<u> </u>	
0804216901	liab black			
0804211.802	Kield blank	<u> </u>		
0804211203	1530		_	
080471160A	1530			
08.0421LP05	1530			
ShOUZILPOG	<u> </u>			
08042/12907	1530		<u> </u>	
			<u>_</u>	
	_			
		_	<u> </u>	
- 				-
-				
<u> </u>			_ -	
 				
<u> </u>				
	Z SPECIAL CONF	NTIONS OF COM	RAPATO	
Analysis: AB 🖂	- -	DITIONS OR COM		
Analysis: (44)	TEM 7082 Lead PCM TCLP Metals		Mold Air-O-Cel	
	PLM Other: —	<u> </u>	Mold Bulk or S	e or Rodac Plate
Mothampheta		ection Limit Reg:		ug/wipe ———0.1 ug/wipe
Wethamphera	unitie by Gorino Special Dete	сцоп шти кец.		dg/mipeo.i dg/mipe
Requested Turnaround:	7 Day	24 Hour		Other
Toquotia Tufficionia.	3 Day	Same Day	<u>, </u>	
	6-10 Day	24-48 Hou		
Total Number of Samples				
Comments/Instructions:				
SEND RESULTS TO:			For	m 4.9.80
	cwhite@wynnwhite.com, dw	hite@wynnwhite.co	om	Post Office Box 83527
	(F) 1191/1 a	2923 5052		Baton Rouge, LA 70884-3527
Environmental • Health • :	Safety	1 2 2		Voice Mail (225) 761-9141

Engineers • Traininers • Consultants

Page 1 Of

Fax No. (225) 761-4450



EMSL Order: 252105601 Customer ID: WYNN50

Customer PO: Project ID:

Phone: (225) 761-9141

Wynn L. White Consulting Engineers, Inc. Fax:

PO Box 83527 Received Date: 08/16/2021 08:30 AM

Baton Rouge, LA 70884-3527 Analysis Date: 08/16/2021 Collected Date: 08/13/2021

Project: 21036 Mill Street/Asses.

Attention: Chris White

Test Report: Asbestos Fiber Analysis by Transmission Electron Microscopy (TEM) Performed by EPA 40 CFR Part 763 Appendix A to Subpart E

Sample Location		Volume	Area Analyzed	Non	Asbestos	#Structures		Analytical Sensitivity	Asbestos Concentration	
Sample	Location	(Liters)	(mm²)	Asb	Type(s)	≥0.5µ < 5µ	≥5µ	(S/cc)	(S/mm²)	(S/cc)
081321BW13		1320.00	0.0645	0	None Detected	0	0	0.0045	<16.00	<0.0045
252105601-0001										
081321BW14		1320.00	0.0645	0	None Detected	0	0	0.0045	<16.00	<0.0045
252105601-0002										
081321BW15		1320.00	0.0645	0	None Detected	0	0	0.0045	<16.00	<0.0045
252105601-0003										
081321BW16		1320.00	0.0645	0	None Detected	0	0	0.0045	<16.00	<0.0045
252105601-0004										
081321BW17		1320.00	0.0645	0	None Detected	0	0	0.0045	<16.00	<0.0045
252105601-0005										

Analyst(s)	
Jurnee West (5)	

Jamie Laginess, Laboratory Operations Manager or other approved signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. Results reported in structures/cm3 are not covered by the laboratory's NVLAP accreditation. Measurement of uncertainty available upon request.

Samples analyzed by EMSL Analytical, Inc. Baton Rouge, LA NVLAP Lab Code 200375-0, LELAP 01950, TX 300238




CHAIN OF CUSTODY

PROJECT DATA	<u> </u>	SHIPPING D	ATA			LABORATORY
Project No.(s):	Samples :	Shipped via:			Name:	EMSL
21036					Address:	18369 Petroleum Drive
Mill Street / ASSES.					,	
Samples Collected by:					City, State,	Zip Baton Rouge, LA 70809
Baxari Weiss		<u></u>	_		Samples R	
						Signature
Date: 8 - 13 - 21					Date Receiv	ved: 8/16/1/ @ 8:30 and
		SAMPLE	IDEN	TIFICATION		
] 				<u> </u>		
081321BN13		320(L)V	0 (
081321BW14		20 (L) Vo	<u> </u>	↓		
08 1321 BW 15		2	<u> </u>			
081321 BW16		320(L) U	101	 		
081321 BW 17	! }}	320(L) V	101	 		
08 1391 BW 18		Lab Blan		 		
108 13 7 1 BW 19	11	-ield Blau	v K	 		
<u> </u>				 -		
[-			
the state of the s					 _	
		_		<u>-</u>		
		_		 	 -	
ļ. 				 		
				 -		
				 		- ·
				 		-
<u></u>				{		
		SPECIAL CONI	AOITIC	S OR COM	//ENTS	
Analysis:	TEM [7082 Lead				Cell Volume:
	PCM [TCLP Metals				Plate or Rodac Plate
	PLM [Other:			Mold Bulk o	
Methamphetan			ection L			0.5 ug/wipe
		<u> </u>		<u> </u>		
Requested Turnaround:		l 7 Day		24 Hour	RD	Other 6 Hove
		3 Day		Same Day		
		6-10 Day		24-48 Hour		
Total Number of Samples:	7					
Comments/Instructions:						
						<u> </u>
SEND RESULTS TO: 👃	veiss	@ Whynn	wh	vite, ca	~ [F	Form 4.9.80
		nnwhite.com, dw.				Post Office Box 83527

Environmental • Health • Safety
Engineers • Traininers • Consultants

Post Office Box 83527
Baton Rouge, LA 70884-3527
Voice Mail (225) 761-9141
Fax No. (225) 761-4450



EMSL Order: 252105630 Customer ID: WYNN50

Customer PO: Project ID:

Fax:

Attention: Chris White Phone: (225) 761-9141

Wynn L. White Consulting Engineers, Inc.

PO Box 83527 Received Date: 08/17/2021 09:45 AM

Baton Rouge, LA 70884-3527 Analysis Date: 08/17/2021 Collected Date: 08/16/2021

Project: 21036/1618 Mill St

Test Report: Asbestos Fiber Analysis by Transmission Electron Microscopy (TEM) Performed by EPA 40 CFR Part 763 Appendix A to Subpart E

Sample	Location	Volume (Liters)	Area Analyzed (mm²)	Non Asb	Asbestos Type(s)	#Structu ≥0.5µ < 5µ		Analytical Sensitivity (S/cc)		estos ntration (S/cc)
081621LP09 252105630-0001		1320.00	0.0645	0	None Detected	0	0	0.0045	<16.00	<0.0045
081621LP10 252105630-0002		1320.00	0.0645	0	None Detected	0	0	0.0045	<16.00	<0.0045
081621LP11 252105630-0003		1320.00	0.0645	0	None Detected	0	0	0.0045	<16.00	<0.0045
081621LP12 252105630-0004		1320.00	0.0645	0	None Detected	0	0	0.0045	<16.00	<0.0045
081621LP13 252105630-0005		1320.00	0.0645	0	None Detected	0	0	0.0045	<16.00	<0.0045

Analyst(s)	
Jamie Laginess (5)	

Jamie Laginess, Laboratory Operations Manager or other approved signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. Results reported in structures/cm3 are not covered by the laboratory's NVLAP accreditation. Measurement of uncertainty available upon request.

Samples analyzed by EMSL Analytical, Inc. Baton Rouge, LA NVLAP Lab Code 200375-0, LELAP 01950, TX 300238





CHAIN OF CUSTODY

PROJECT DATA	SHIPPING D.	ATA .		LABORATORY
Project No.(s):	Samples Shipped via:		Name:	EMSL
7/036.			Address:	18369 Petroleum Drive
1618 M:11 St.	redex			
Samples Collected by:	, , , , , , , , , , , , , , , , , , , ,		City, State, Z	Zip Baton Rouge, LA 70809
Lary Palermo			Samples Re	c'd by: L. Shoha
		<u> </u>		Signature
Date: \\ \\(\(\(\)\\\\\\\\\\\\\\\\\\\\\\\\\\				ed: 8/17/21 @ 9:45 ps
` ` ` ` ` ` ` ` ` ` ` ` ` ` ` ` ` ` `	SAMPLE	IDENTIFICATION		
08/62/LP07	Lab blank		 -	
081621LPOX	- Field Blank		_ <u></u>	
08/66/1 LP09	- 1320 Vol. (12)			
08/102/17/0	(320 /4. (1)			
OSIGNILPII.	1320 Vol. (L)			
271671P12	1320 Val. (L)			
OBILITILES _	1320 Vol. (L)			
<u> </u>		 -		
				
				
	***.			
				
	- 			
				
				
				
	- -			
				
	SPECIAL COND	OITIONS OR COMM	/IENTS	
Analysis: (40)	TEM 7082 Lead		Mold Air-O-Ce	ell Volume:
	PCM TCLP Metals			ate or Rodac Plate
	PLM Other:		Mold Bulk or 8	
Methamphetam		ction Limit Reg:		ug/wipe0.1 ug/wipe
			_	
Requested Turnaround:	7 Day	24 Hour	FRD [2	Other 6hour
	3 Day	Same Day	(
	6-10 Day	24-48 Hour		
Total Number of Samples:	7			
Comments/Instructions:		·		
				
SEND RESULTS TO:				rm 4.9.80
	cwhite@wynnwhite.com, dwh	ite@wynnwhite.con	n .	Post Office Box 83527

Environmental • Health • Safety Engineers • Traininers • Consultants (E) 1961 4864 4123

Baton Rouge, LA 70884-3527 Voice Mail (225) 761-9141 Fax No. (225) 761-4450



EMSL Order: 162119066 Customer ID: WYNN50

Customer PO: Project ID:

Attention: Diane White Phone: (225) 761-9141

Wynn L. White Consulting Engineers, Inc. Fax:

PO Box 83527 Received Date: 08/20/2021 9:30 AM

Baton Rouge, LA 70884-3527 Analysis Date: 08/23/2021

Collected Date: 08/19/2021

Project: 21036

Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

			Non-A	<u>sbestos</u>	Asbestos
Sample	Description	Appearance	% Fibrous	% Non-Fibrous	% Type
081921TP12		Tan Non-Fibrous		98% Non-fibrous (Other)	2% Chrysotile
162119066-0001		Homogeneous			
081921TP13		Black Non-Fibrous		95% Non-fibrous (Other)	5% Chrysotile
162119066-0002		Homogeneous			
081921TP14		Black Non-Fibrous		95% Non-fibrous (Other)	5% Chrysotile
162119066-0003		Homogeneous			

Analyst(s)	
Craig Nixon (3)	

Vehand L. Harding

Richard Harding, Laboratory Manager or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Indianapolis, IN NVLAP Lab Code 200188-0, AZ0939, CA 2575, CO AL-15132, TX 300262

Initial report from: 08/23/2021 08:27:31



CHAIN OF CUSTODY

PROJECT DATA	SHIPPING DA	TA ,	LABORATORY		
Project No.(s):	Samples Shipped via: Fed Ex		Name:	EMSL	
21036			Address:	18369 Petroleu	m Drive
				<u></u>	
Samples Collected by:			City, State, Z	i p Baton Rouge, I	A 70809
TodoPeteron	·		Samples Rec	:'d by:	
			July		Signature
Date: <i>US-19-</i> より	<u></u>		Date Receive	d: \$/10/2/	930,2
.	SAMPLEI	DENTIFICATION	V.		
0819217812					//
081921 TP13					· ·
081921 TP14	<u>_</u>	<u> </u>			
<u> </u>					
			<u>.</u>		
, 		_			
. !					
<u> </u>					
			_		
<u> </u>					
	SPECIAL CONDI				
Analysis:	TEM 7082 Lead	· <u></u>	Mold Air-O-Ce		
	PCM TCLP Metals			te or Rodac Plate	
		<u></u>	Mold Bulk or 9		
Methampheta	mine by GC/MS Special Detect	tion Limit Req:	0.5	ug/wipe	-0.1 ug/wipe
					
Requested Turnaround:	7 Day	24 Hour		Other	
	3 Day	Same Day			
Total Name 1 min 1	6-10 Day	24-48 Hou	ır		
Total Number of Samples	: 3				
Comments/Instructions:					
				· ·	
					. <u> </u>
SEND RESULTS TO:	tpoterson o wymwhite.			rm 4.9.80	_
<i>i</i>	cwhite@wynnwhite.com. dwhi	te@wwnnwhite.co	ım l	Post Offic	e Box 83527

Environmental • Health • Safety Engineers • Traininers • Consultants

Baton Rouge, LA 70884-3527 Voice Mail (225) 761-9141

Fax No. (225) 761-4450



EMSL Order: 162120546 Customer ID: WYNN50

Customer PO: Project ID:

Attention: Diane White Phone: (225) 761-9141

Wynn L. White Consulting Engineers, Inc. Fax:

PO Box 83527 Received Date: 09/07/2021 9:40 AM

Baton Rouge, LA 70884-3527 Analysis Date: 09/07/2021

Collected Date: 09/03/2021

Project: 21036 Assessment Building

Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

			Non-Asbestos			
Sample	Description	Appearance	% Fibrous	% Non-Fibrous	% Type	
090321H7-Wrap		White/Silver Fibrous	60% Cellulose 15% Glass	25% Non-fibrous (Other)	None Detected	
162120546-0001		Homogeneous				
090321H7-Insulation		Yellow	98% Glass	2% Non-fibrous (Other)	None Detected	
		Fibrous				
162120546-0001A		Homogeneous				
090321H8-Wrap		White/Silver	50% Cellulose	30% Non-fibrous (Other)	None Detected	
·		Fibrous	20% Glass			
162120546-0002		Homogeneous				
090321H8-Insulation		Yellow	98% Glass	2% Non-fibrous (Other)	None Detected	
		Fibrous		. ,		
162120546-0002A		Homogeneous				
090321H9-Wrap		White/Silver	75% Cellulose	10% Non-fibrous (Other)	None Detected	
•		Fibrous	15% Glass	. ,		
162120546-0003		Homogeneous				
090321H9-Insulation		Yellow	98% Glass	2% Non-fibrous (Other)	None Detected	
		Fibrous		, ,		
162120546-0003A		Homogeneous				

Analyst(s)

Amanda Straw (4) Maggie Hayden (2) Richard Harding, Laboratory Manager or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Indianapolis, IN NVLAP Lab Code 200188-0, AZ0939, CA 2575, CO AL-15132, TX 300262

Initial report from: 09/07/2021 10:39:22




CHAIN OF CUSTODY

PROJECT DATA	SHIPPING DA	TA	L	ABORATORY
Project No.(s):	Samples Shipped via:		Name:	EMSL
21036			Address:	18369 Petroleum Drive
Assessment Building Samples Collected by:	Fedex		City, State, Zip	Baton Rouge, LA 70809
Tray Hawthorne			Samples Rec'd	by: Engl
			Aure	Signature
Date: 9-3-21			Date Received:	9/7/21 940
<u>-</u>	SAMPLE	IDENTIFICATION	<u>. </u>	7 /
090321 H 7				·
090321 H8				
090321 49				
				<u> </u>
			 -	
				
				
				
				
·				
	- 			
				
			<u> </u>	 -
	SPECIAL CONDI	TIONS OF COM	MENTS	
A a studios		TIONS OR COM		\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
Analysis:	TEM 7082 Lead		Mold Air-O-Cell	
	PCM TCLP Metals			or Rodac Plate
	PLM Other:		Mold Bulk or Sv	
Methampheta	mine by GC/MS Special Detec	tion Limit Req:	0.5 u	ig/wipe0.1 ug/wipe
Dequarted Turners	7750	10412-115		Rous / Ha
Requested Turnaround:	7 Day	24 Hour		Other <u>6 Hours</u>
	3 Day	Same Day		
Takal Number of Care Lie	6-10 Day	24-48 Hou	<u>r</u>	
Total Number of Samples				
Comments/Instructions:	Positive stop		<u>-</u>	
-				
SEND RESULTS TO:				n 4.9.80
}	cwhite@wynnwhite.com, dwh	ite@wynnwhite.co	om I	Post Office Box 8352

Environmental • Health • Safety Engineers • Traininers • Consultants Post Office Box 8352/ Baton Rouge, LA 70884-3527 Voice Mail (225) 761-9141 Fax No. (225) 761-4450


ROOMS 114 & 115 ABATEMENT PLAN

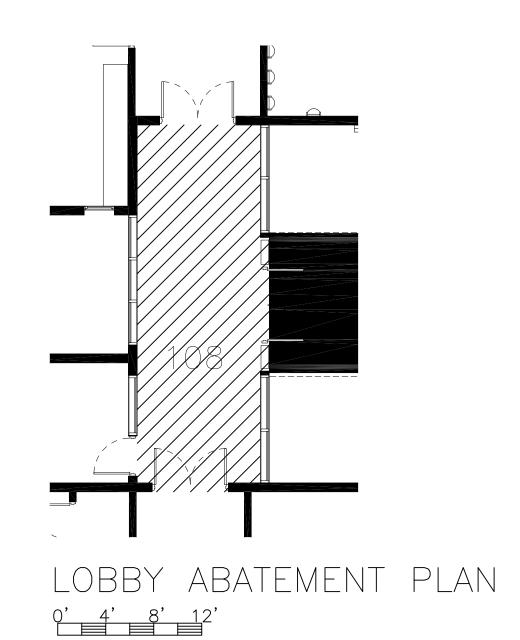




This drawing and design are the property of Wynn L. White Consulting Engineers, Inc. They are submitted on the condition that they are not to be used, reproduced, or copied, in whole or in part, or used for furnishing information to others, without prior written consent of Wynn L. White Consulting Engineers, Inc. All common law rights of copyright and otherwise are hereby specifically reserved.

THIS DRAWING IS APPROVED FOR CONSTRUCTION THIS DRAWING IS NOT APPROVED FOR CONSTRUCTION

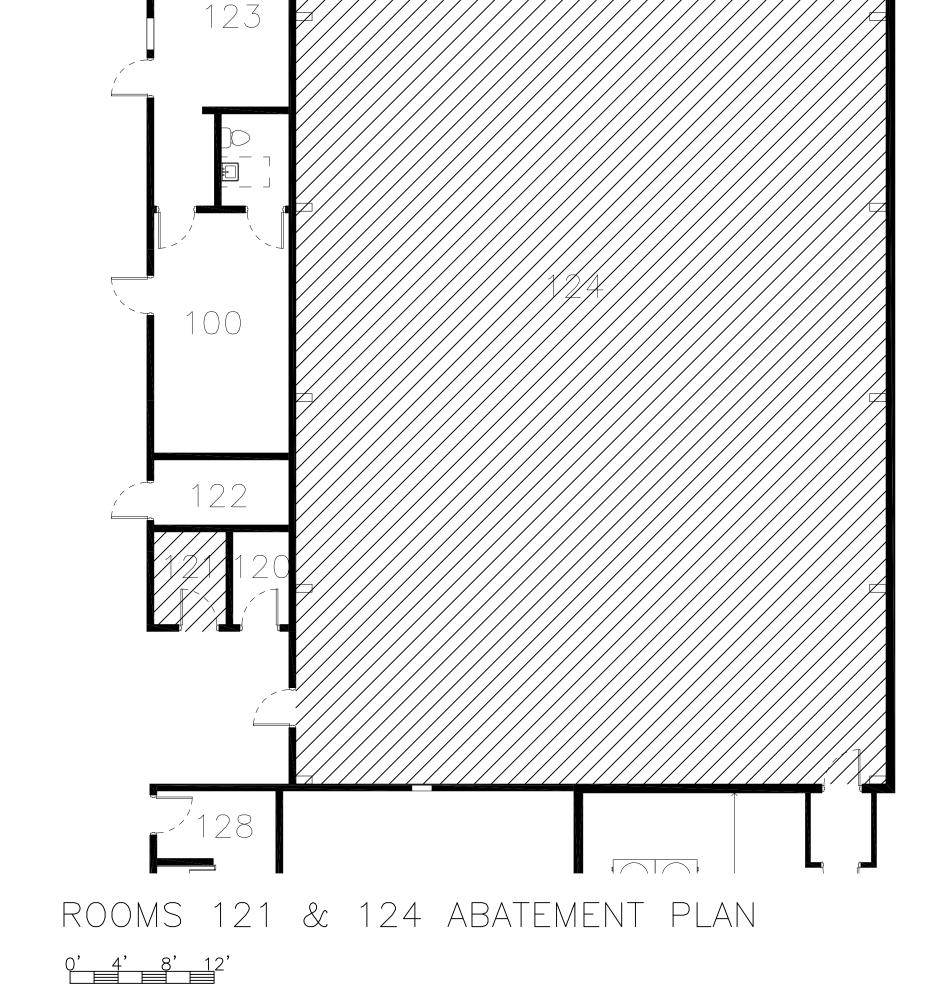



KEY MAP - NOT TO SCALE

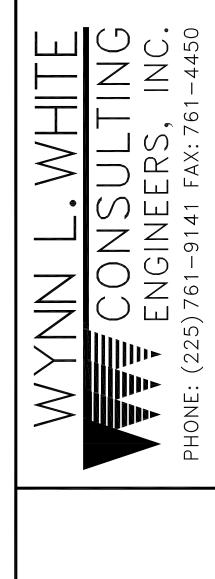

PROJECT NUMBER 20046


REVISION# DATE BY

DRAWN BY: CMW


CHECKED BY: CMW

DATE: 4/26/21 SCALE: AS NOTED

SHEET 1 OF 1



REMOVE AND DISPOSE OF ASBESTOS CONTAINING FLOOR MATERIALS

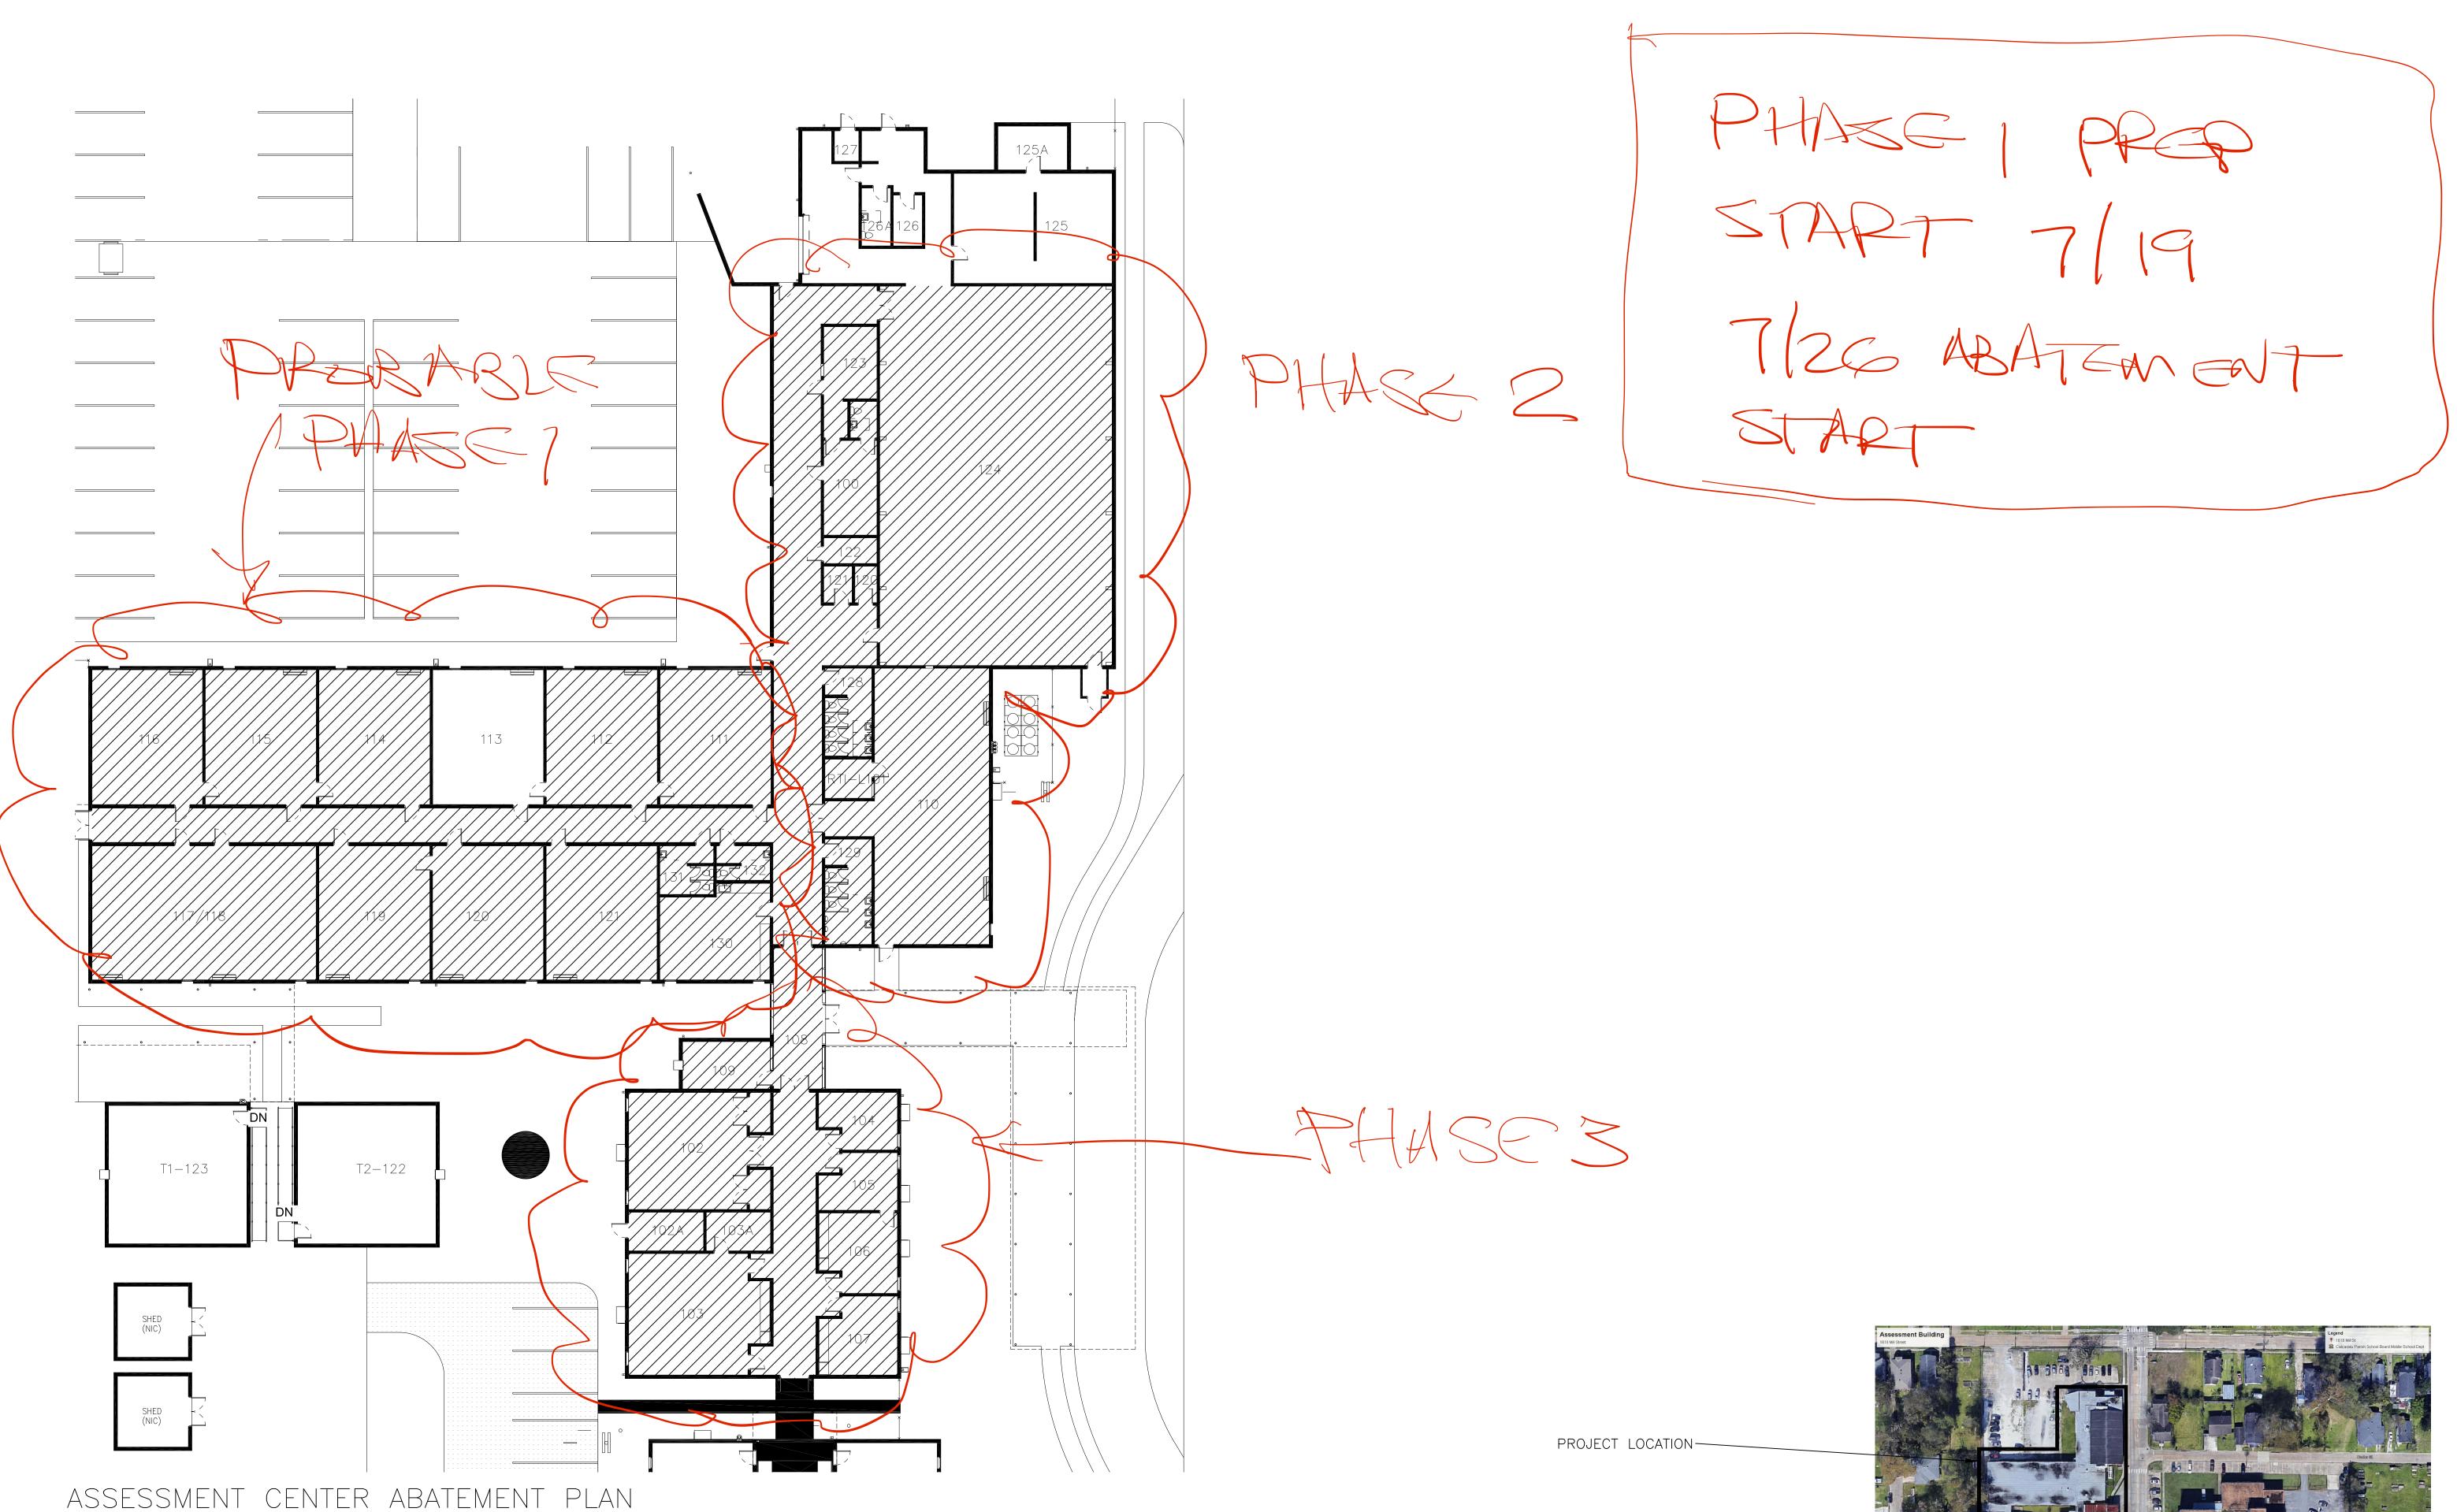

REMOVE AND DISPOSE OF ASBESTOS CONTAINING FLOOR MATERIALS

0' 8' 16' 24'

THIS DRAWING IS APPROVED FOR CONSTRUCTION

THIS DRAWING IS NOT APPROVED FOR CONSTRUCTION

This drawing and design are the property of Wynn L. White Consulting Engineers, Inc. They are submitted on the condition that they are not to be used, reproduced, or copied,

in whole or in part, or used for furnishing information to others, without prior written

consent of Wynn L. White Consulting Engineers, Inc. All common law rights of copyright and otherwise are hereby specifically reserved.

PROJECT NUMBER 20046

REVISION# DATE BY 1 5/27/21 CMW

DRAWN BY: CMW CHECKED BY: CMW DATE: 4/26/21

SCALE: AS NOTED

SHEET 1 OF 1

KEY MAP - NOT TO SCALE

CALCASIEU PARISH SCHOOL BOARD

SPECIFICATIONS FOR ASBESTOS ABATEMENT AT CPSB ASSESSMENT BUILDING



Engineer's Project Number: 20046

April 27, 2021

Wynn L. White Consulting Engineers, Inc. PO Box 83527

Baton Rouge, LA 70884-3527

Phone: (225) 761-9141 Fax: (225) 761-4450

Email: wwhite@wynnwhite.com

Table of Contents

Abatement Specification Sections

Division 0 – Post Project Submittal

Post Project Submittal Package

Division 2 – Existing Conditions

02 80 10 02 80 15 02 80 21	Summary of Work - Asbestos Abatement Coordination - Asbestos Abatement Reference Standards and Definitions - Asbestos Abatement
02 80 22	Codes, Regulations and Standards - Asbestos Abatement
02 80 30	Submittals - Asbestos Abatement
02 80 40	Construction Facilities and Temporary Controls - Asbestos Abatement
02 80 41	Temporary Pressure Differential & Air Circulation System
02 80 42	Temporary Enclosures
02 80 43	Regulated Areas
02 80 44	Worker Protection - Asbestos Abatement
02 80 45	Respiratory Protection
02 80 46	Decontamination Units
02 82 05	Materials and Equipment - Asbestos Abatement
02 82 06	Substitutions - Asbestos Abatement
02 82 08	Project Decontamination
02 82 13	Resilient Flooring Removal – Asbestos Abatement
02 82 35	Disposal of Regulated Asbestos-Containing Material
02 82 70	Contract Closeout - Asbestos Abatement

POST PROJECT SUBMITTAL PACKAGE

ASBESTOS ABATEMENT PROJECT NAME:					
SCHOOL NAME:					
CONTRACTOR LICENSE DATA & ACCREDITATION:					
SUPERVISOR'S ACCREDITATION:					
WORKER ACCREDITATION:					
WORKER SIGN-IN SHEETS:					
DAILY PROJECT LOG:					
ADVF:					
WORK AREA VISUAL INSPECTION CERTIFICATION:					
DATES OF PROJECT:					
QUANTITIES & TYPE OF ACM REMOVED:					

NOTE: The Contractor shall submit this package along with Final application for payment.

Calcasieu Parish School Board shall process the final Application for payment upon receipt of the complete Package.

02 80 10-1

SECTION 02 80 10 - SUMMARY OF THE WORK

PART 1 - GENERAL

1.1 **RELATED DOCUMENTS**

A. The contract and other Division 2 sections apply to this section.

1.2 WORK COVERED BY CONTRACT DOCUMENTS

A. Work areas are shown on the project plans.

> Contractor shall remove to the substrate, handle, and dispose of all carpet, floor tile/mastic, floor glue, floor adhesive, floor patch, and floor filler/leveling compound as Class I Asbestos Containing Materials in work areas shown on drawings. Contractor shall clean and decontaminate all work areas.

The work areas shown may contain multiple layers of carpet, flooring, and floor tile/mastic.

Contractor shall include all exploratory demolition to access ACM in his bid.

Owner: Calcasieu Parish School Board.

B. Contract Documents, dated April 2021 were prepared by Wynn L. White Consulting Engineers, Inc., 17485 Opportunity Drive, Baton Rouge, LA 70817.

ASBESTOS CONTAINING MATERIALS: 1.3

Α. The Work of this contract involves activities that will disturb asbestos and presumed asbestos-containing materials (PACM). The location of these materials known to be present at the worksite is set forth in the contract documents. If any other of these materials is found, notify the owner and Engineer about the location and quantity of these materials within 24 hours of the discovery.

1.4 **ASBESTOS HEALTH RISK:**

- Α. The disturbance or dislocation of ACM may cause asbestos fibers to be released into the building's atmosphere, thereby creating a potential health risk to workers and building occupants. Apprise all workers, supervisory personnel, subcontractors and consultants who will be at the job site of the seriousness of the risk and of proper work procedures that must be followed.
- B. Where in the performance of the work, workers, supervisory personnel, subcontractors, or consultants may encounter, disturb, or otherwise function in the immediate vicinity of any identified ACM, take appropriate continuous measures as necessary to protect all building occupants from the risk of exposure to airborne asbestos. Such measures shall include the procedures and methods described herein, and compliance with regulations of applicable federal, state and local agencies.

1.5 **CONTRACTOR USE OF PREMISES**

A. Use of the Site: Limit use of the premises to work in areas indicated. Confine operations to areas within Section 02 80 10 © 4/27/21 20046

contract limits indicated. Do not disturb portions of the site beyond the areas in which the Work is indicated.

- Owner Occupancy: Coordinate with Owner to allow for Owner occupancy of areas not involved in the work under this contract, or work areas under this contract that have been completed and are ready for release to the Owner.
- 2. Driveways and Entrances: Keep driveways and entrances serving the premises clear and available to the Owner, the Owner's employees, and emergency vehicles at all times. Coordinate use of these areas for parking or storage of materials. Schedule deliveries to minimize space and time requirements for storage of materials and equipment onsite.
- **B.** Use of the Existing Building: Maintain the existing building and jobsite in a secure condition throughout the construction period. Take all precautions necessary to secure the existing building and jobsite during the construction period.
 - Smoking: Smoking or open fires will not be permitted within the building enclosure or on the premises.
 - **2. Toilet Rooms:** use of existing toilets within the building by the Contractor's personnel will not be permitted.

1.6 OCCUPANCY REQUIREMENTS

- **A. Full Owner Occupancy:** The Owner may occupy the site during the entire construction period. Cooperate with the Owner during construction operations to minimize conflicts and maintain site security. Perform the Work so as not to interfere with the Owner's operations.
- **B.** Partial Owner Occupancy: The Owner reserves the right to occupy completed areas of the site prior to Substantial Completion, provided such occupancy does not interfere with completion of the Work. Such placing of equipment and partial occupancy shall not constitute acceptance of the total Work.

1.7 AIR MONITORING BY THE OWNER:

- A. The Owner shall contract for air monitoring. Air monitoring shall be conducted both outside and inside of the work area during the work, and for clearance sampling at the end of the project
 - 1. Outside of the Work Area: The Owner's air monitoring firm may sample air outside of the work area to detect faults in the work area isolation such as:
 - a. Contamination of the building outside of the work area with airborne asbestos fibers.
 - b. Failure of filtration or rupture in the differential pressure system,
 - c. Contamination of air outside the building envelope with airborne asbestos fibers.
 - 2. Inside the Work Area: The Owner's air monitoring firm may monitor airborne fiber counts in the Work Area. The purpose of this air monitoring is to detect airborne asbestos concentrations that may challenge the ability of the Work Area isolation procedures to protect the balance of the building or outside of the building from contamination by airborne fibers.
- **B.** Work area clearance: Clearance air sampling by the Owner's air monitoring firm at the completion of asbestos abatement work is described in Section "Project Decontamination".
- **C. Air monitoring** required by OSHA is work of the Contractor and is not covered in this section.

© 4/27/21 20046 WYNN L. WHIT Page 2 of 7

Specifications 02 80 10-3

1.8 SCHEDULE OF AIR SAMPLES BY OWNER:

- A. Sample cassettes: Samples will be collected on 25 mm. cassettes as follows:
 - 1. PCM: 0.8 micrometer mixed cellulose ester.
 - **2. TEM:** 0.45 micrometer mixed cellulose ester or 0.40 micrometer polycarbonate, with 5.0 micron mixed cellulose ester backing filter.
- **B.** Number and Volume of Samples: The number and volume of air samples given in the schedules is approximate. The exact number and volume of samples collected by the Owner may vary depending upon job conditions and the analytical method used.
- C. Sample Volume and Sensitivity:
 - 1. **PCM:** The sample volumes collected by the Owner's air monitoring firm will be determined by the following formula:

$$Volume = \frac{\left(\frac{Number\ of\ Fibers}{Area\ of\ 100\ fields}\right)X\ Total\ Filter\ Area}{\left(\frac{Limit\ Value}{4}\right)}$$

Where:

Number of fibers = 5 fibers/100 fields, based on a limit of detection (LOD) of 7

fibers/mm² on the filter

Area of 100 fields = 0.785mm^2 Total Filter Area = 385mm^2

Limit Value = as specified in the schedules of samples below

- a. For purposes of this specification, the sample volume calculated above will be considered to be of sufficient size so that there is a 95% level of confidence that the value measured by each individual sample at the limit of detection (LOD) is less than or equal to the limit values specified below.
- b. For purposes of this specification, the Limit of Detection (LOD) is defined as 7 fibers/mm² on the filter or 5 fibers/100 fields.
- c. For purposes of this specification overloaded samples will be considered as exceeding the applicable limit value.
- 2. TEM: Analytical Sensitivity of 0.005 structures/cc as set forth in the AHERA regulation.

D. Not Used

E. Daily:

- **1. From start of work** of Section "Temporary Enclosures" through the work of Section "Project Decontamination", the Owner may take samples.
- 2. Sample volume and sensitivity: inside the work area may vary depending upon conditions in the work area. If samples are overloaded at the sample volume required for a limit value equal to the "Stop Action Levels" or "Immediate Stop Action Levels" given later in this section, the level is

© 4/27/21 20046 WYNN L. WHIT

Section 02 80 10

Wynn L. White Consulting Engineers, Inc. (225) 761-9141

considered to have been exceeded.

3. PCM Samples:

Location Sampled	Number of Samples	Limit Value (Fibers/cc)	Approx. Volume (Liters)	Rate (LPM)
Each Work Area	1	0.1	100	1-10
Outside Each Work Area at Critical Barrier	1	0.01	1,000	1-10
Clean Room	1	0.01	1,000	1-10
Equipment Decon	1	0.01	1,000	1-10
Outside Building	1	0.01	1,000	1-10
Output of Pressure Differential System	1	0.01	1,000	1-10

F. Additional samples may be taken at Owner's or Designer's discretion. If airborne fiber counts exceed allowed limits additional samples may be taken as necessary to monitor fiber levels.

1.9 ANALYTICAL METHODS USED BY THE OWNER:

- A. The following methods will be used by The Owner in analyzing filters used to collect air samples. Sampling rates may be varied from printed standards to allow for high volume sampling.
 - 1. Phase Contrast Microscopy (PCM) will be performed using the NIOSH 7400 method.
 - 2. Transmission Electron Microscopy (TEM) will be performed using the analysis method set forth in the AHERA regulation 40 CFR Part 763 Appendix A.

1.10 LABORATORY TESTING BY OWNER:

- A. The services of a testing laboratory will be employed by the Owner to perform laboratory analyses of the air samples. A microscope and technician will be set up at the job site, or samples will be sent overnight on a daily basis, so that verbal reports on air samples can be obtained within 24 hours. If on-site analysis is performed, the air sampling and analysis firm employed by the Owner shall participate in the Proficiency Analytical Testing (PAT) program administered by the American Industrial Hygiene Association (AIHA).
- B. The Contractor will have access to all air monitoring tests and results upon written request.
- C. Written Reports: of all air monitoring tests will be made available to the Contractor upon written request.

1.11 FIBERS AND STRUCTURES

A. Fibers Counted: The following procedure will be used to resolve any disputes regarding fiber types when a project has been stopped due to excessive airborne fiber counts.

Section 02 80 10 © 4/27/21 20046



- 1. Large Fibers: "Airborne Fibers" referred to above include all fibers regardless of composition as counted by phase contrast microscopy (PCM), unless additional analysis by transmission or scanning electron microscopy demonstrates to the satisfaction of the Designer that non-asbestos fibers are being counted. "Airborne Fibers" counted in samples analyzed by transmission electron microscopy shall be asbestos fibers, greater than 5 microns in length. For purposes of stop action levels, subsequent to analysis by electron microscopy, the number of "Airborne Fibers" shall be determined by multiplying the number of fibers, regardless of composition, counted by PCM by the proportion of fibers that are asbestos as determined by TEM (a number equal to, asbestos fibers counted, divided by all fibers counted in the electron microscopy analysis).
- **2. Small Structures:** "Airborne Fibers" referred to above include asbestos structures (fibers, bundles, clusters or matrices) of any diameter and any length greater than 0.5 microns.

1.12 ADDITIONAL TESTING:

A. The Contractor may conduct air monitoring and laboratory testing. If he elects to do this the cost of such air monitoring and laboratory testing shall be at no additional cost to the Owner.

1.13 PERSONAL MONITORING:

A. Owner will not perform air monitoring for the Contractor to meet Contractor's OSHA requirements for personal sampling or any other purpose.

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION

3.1 STOP ACTION LEVELS:

B. Asbestos samples Inside Work Area: Maintain an average airborne count in the work area of less than the Stop Action Level given below for the type of respiratory protection in use. If the fiber counts rise above this figure for any sample taken, revise work procedures to lower fiber counts. If the Time Weighted Average (TWA) fiber count for any work shift or 8 hour period exceeds the Stop Action Level, stop all work except corrective action, leave pressure differential and air circulation system in operation and notify Designer. After correcting cause of high fiber levels, do not recommence work for 24 hours unless otherwise authorized, in writing, by Designer.

STOP ACTION LEVEL (f/cc)	IMMEDIATELY STOP LEVEL (f/cc)	MINIMUM RESPIRATOR REQUIRED	PROTECTION FACTOR
0.1	0.5	Half face	10
0.5	2.5	PAPR	50
1.0	5.0	Supplied Air	100

Section 02 80 10 © 4/27/21 20046 WYNN L, W

- If airborne fiber counts exceed Immediate Stop Level given above for type of respiratory protection
 in use for any period of time cease all work except corrective action. Notify Designer. Do not
 recommence work until fiber counts fall below Stop Action Level given above for the type of
 respiratory protection in use. After correcting cause of high fiber levels, do not recommence work
 for 24 hours unless otherwise authorized, in writing, by Designer.
- **B.** Outside Work Area: If any air sample taken outside of the Work Area exceeds 0.01 f/cc, immediately and automatically stop all work except corrective action. The Designer will determine the source of the high reading and so notify the Contractor in writing.
 - If the high reading was the result of a failure of Work Area isolation measures initiate the following actions:
 - a. Immediately erect new critical barriers as set forth in Section "Temporary Enclosures" to isolate the affected area from the balance of the building. Erect Critical Barriers at the next existing structural isolation of the involved space (e.g. wall, ceiling, floor).
 - b. Decontaminate the affected area in accordance with Section "Project Decontamination".
 - c. Require that respiratory protection as set forth in Section "Respiratory Protection" be worn in affected area until area is cleared for re-occupancy in accordance with Section "Project Decontamination".
 - d. Leave Critical Barriers in place until completion of work and ensure that the operation of the pressure differential system in the Work Area results in a flow of air from the balance of the building into the affected area.
 - e. If the exit from the clean room of the personnel decontamination unit enters the affected area, establish a decontamination facility consisting of a Shower Room and Changing Room as set forth in Section "Decontamination Units" at entry point to affected area.
 - f. After Certification of Visual Inspection in the Work Area remove critical barriers separating the work area from the affected area. Final air samples will be taken within the entire area as set forth in Section "Project Decontamination".
 - 2. If the high reading was the result of other causes initiate corrective action as determined by the Designer.
- C. Effect on Contract Sum: Complete corrective work with no change in the Contract Sum if high airborne fiber counts were caused by Contractor's activities. The Contract Sum and schedule will be adjusted for additional work caused by high airborne fiber counts beyond the Contractor's control.

3.2 STOP WORK:

- A. If the Owner, Designer, or Project Administrator presents a written stop work order, immediately and automatically conforms to that stop work order, while maintaining temporary enclosures and pressure differential. Do not recommence abatement work until authorized in writing by Owner, Designer or Project Administrator.
- **B. Immediately initiate the following actions:** After being presented with a stop work order immediately:
 - Cease all asbestos removal activities, or any other activities that disturbs ACM.

© 4/27/21 20046 WYNN L. WHIT Page 6 of 7

Specifications 02 80 10-7

- 2. Repair any fallen, ripped or otherwise failed work area isolation measures.
- 3. Maintain in operation all work area isolation measures including those required by Sections "Temporary Enclosures," "Temporary Pressure Differential & Air Circulation System," "Decontamination Units."
- 4. Maintain all worker protections including those required by Sections "Worker Protection Asbestos Abatement," and "Respiratory Protection."
- 5. Fog the air in the work area with a mist of amended water to reduce airborne fiber levels.
- **C. Do not recommence work** until authorized in writing by the Owner or Designer.

END OF SECTION - 02 80 10

© 4/27/21 20046 WYNN L. WHITE

Section 02 80 10

Specifications 02 80 15-1

SECTION 02 80 15 - COORDINATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 2 Specification Sections, apply to this Section.

1.2 SUMMARY

- **A. This Section includes** administrative and supervisory requirements necessary for coordinating construction operations including, but not necessarily limited to, the following:
 - 1. General project coordination procedures.
 - **2.** Conservation.
 - 3. Plan of Action.
 - 4. Contingency Plan.
 - Project Directory.
 - Notifications.
 - **7.** Pre-Construction Inspection.
 - 8. Contractor's Construction Schedule.
 - **9.** Administrative and supervisory personnel.
 - 10. Pre-Construction Conference
 - 11. Progress Meetings
 - 12. Coordination meetings.
 - 13. Record Keeping.
 - 14. Special Reports.
- B. Related Sections: The following Sections contain requirements that relate to this Section:
 - 1. "Section Submittals Asbestos Abatement" for administrative procedures regarding submittals.
 - 2. "Section Materials and Equipment Asbestos Abatement" for coordinating general installation.
 - 3. "Section Project Closeout Asbestos Abatement" for coordinating contract closeout.

1.3 COORDINATION

- **A. Owner Occupancy:** Coordinate construction operations and scheduling with partial occupancy requirements of the Owner and the Owner's use of utilities.
- **B.** Coordinate construction operations included in various Sections of these Specifications to assure efficient and orderly completion of each part of the Work. Coordinate construction operations included under different Sections that depend on each other for proper installation, connection, and operation.
 - 1. Schedule construction operations in the sequence required to obtain the best results where execution of one part of the Work depends on execution of other components, before or after its own execution.
 - 2. Coordinate installation of different components to assure maximum accessibility for required maintenance, service, and repair.
 - 3. Make provisions to accommodate items scheduled for later installation.
- **C.** Where necessary, prepare memoranda for distribution to each party involved, outlining special procedures required for coordination. Include such items as required notices, reports, and attendance at meetings.
 - Prepare similar memoranda for the Owner and separate contractors where coordination of their work is required.

Page 1 of 9

Section 02 80 15 © 4/27/21 20046 WYNN L, WHIT

02 80 15-2 Specifications

- D. Administrative Procedures: Coordinate scheduling and timing of required administrative procedures with other construction activities to avoid conflicts and assure orderly progress of the Work. Such administrative activities include, but are not limited to, the following:
 - 1. Preparation of schedules.
 - 2. Installation and removal of temporary facilities.
 - 3. Delivery and processing of submittals.
 - 4. Progress meetings.
 - 5. Project closeout activities.
- E. Conservation: Coordinate construction operations to assure that operations are carried out with consideration given to conservation of energy, water, and materials.
 - 1. Salvage materials and equipment involved in performance of, but not actually incorporated in, the Work.

1.4 PLAN OF ACTION:

- A. Prepare a detailed plan of the procedures proposed for use in complying with the requirements of this specification. Include in the plan the location and layout of decontamination areas, the sequencing of asbestos work, the interface of trades involved in the performance of work, methods to be used to assure the safety of building occupants and visitors to the site, disposal plan including location of approved disposal site, and a detailed description of the methods to be employed to control pollution. Expand upon the use of portable HEPA ventilation system, closing out of the building's HVAC system, maintaining required temperature and relative humidity inside the work area, method of removal to prohibit visible emissions, and packaging of removed asbestos debris.
 - 1. Submit the Plan of Action to the Designer for information only, prior to the start of work.

CONTINGENCY PLAN:

- A. Contingency Plan: Prepare a contingency plan for emergencies or any other event that may require breaching of work area containment or modification or abridgement of decontamination or work area isolation procedures. Include in this plan procedures for performing electrical and mechanical repairs inside containment after abatement work has begun. Include in plan specific procedures for decontamination or work area isolation. Include in plan measures to comply with Interim Life Safety Measures listed below. Note that nothing in this specification should impede safe exiting or providing of adequate medical attention in the event of an emergency. Items to be addressed in the plan include, but are not limited to the following:
 - 1. Fire
 - Accident 2.
 - 3. Life threatening injury
 - 4. Non-life threatening injury
 - 5. Rescue
 - Power Failure 6.
 - 7. Pressure differential system failure
 - 8. Breach of containment
 - 9. Electrical faults or shock
 - 10. Excessive heat / cold (if/when such limits are specified)
 - 11. Supplied air system failure
 - 12. Water leaks
 - 13. Waste spills
 - 14. Unauthorized entry into work area
 - Elevated air samples outside of containment 15.

© 4/27/21 20046 CONSULTING

02 80 15-3 Specifications

- Repairs inside containment
- 17. Toxic releases

INTERIM LIFE SAFETY MEASURES:

- 1. Contractor shall ensure exits provide free and unobstructed egress. Personnel shall receive training if alternate exits must be designated.
- 2. Contractor shall ensure free and unobstructed access to emergency department/services and for emergency forces.
- 3. Contractor shall ensure fire alarm detection and suppression systems are not impaired. A temporary, equivalent, system shall be provided when any fire system is impaired. Temporary system must be inspected and tested monthly.
- 4. Contractor shall ensure temporary construction partitions are smoke tight and built of noncombustible materials.
- 5. Contractor shall provide additional firefighting equipment and use training for personnel.
- 6. No smoking within the building is allowed by contractors.
- 7. Contractor shall develop and enforce storage, housekeeping and debris removal procedures that reduce the flammable and combustible fire load to the lowest level necessary for daily operations.
- 8. Contractor shall conduct minimum of two (2) fire drills per shift per quarter in the affected areas.
- 9. Contractor shall increase surveillance hazard of buildings, grounds and equipment with special attention construction areas, construction storage and excavations.
- 10. Contractor shall train personnel when structural or compartmentation features of fire safety are compromised.
- 11. Contractor shall conduct organization-wide safety education programs to ensure awareness of any Life Safety Code deficiencies and construction hazards for the INTERIM LIFE SAFETY MEASURES.

1.6 PROJECT DIRECTORY

- A. Develop a directory of all entities involved in the project. Include the Contractor's principal staff assignments, including the Superintendent and other personnel in attendance at the site. Identify individuals, their duties and responsibilities. List business name, contact person, normal business and emergency telephone, pager and fax numbers and addresses of:
 - 1. Owner, Designer, and Project Administrator
 - 2. Contractor's General Superintendent, supervisory personnel and Contractor's home office
 - 3. Emergency services including but not limited to fire, ambulance, doctor, hospital, police, power company, telephone company.
 - 4. Local, state, and federal agencies with jurisdiction over the project.
- В. Post: Post copies of the Project Directory in the project meeting room, the temporary field office, each temporary telephone, and at entrance to clean room of Personnel Decontamination Unit.

1.7 NOTIFICATIONS

A. Notify other entities at the job site of the nature of the asbestos abatement activities, location of asbestoscontaining materials (ACM), requirements relative to asbestos set forth in these specifications and

Section 02 80 15 © 4/27/21 20046

02 80 15-4 Specifications

applicable regulations. Advance notification will be made to:

- 1. Owners of the building/facility;
- 2. Employees who will perform asbestos abatement work or related activities, or who will be in the work area during the course of the work of this contract.
- 3. Employers of employees who work and/or will be working in adjacent areas during the course of the work of this contract.
- В. Notify emergency service agencies including fire, ambulance, police or other agency that may service the abatement work site in case of an emergency. Notification is to include methods of entering work area, emergency entry and exit locations, modifications to fire notification or fire fighting equipment, and other information needed by agencies providing emergency services.
- C. Notifications of Emergency: Any individual at the job site may notify emergency service agencies if necessary without effect on this Contract or the Contract Sum.

1.8 PRE-CONSTRUCTION INSPECTION:

A. Inspect areas in which work will be performed, prior to commencement of work. Prepare a listing of damage to structure, surfaces, equipment or of surrounding properties which could be misconstrued as damage resulting from the work. Photograph or videotape existing conditions as necessary to document conditions. Submit to Designer for record purposes prior to starting work.

1.9 CONTRACTOR'S CONSTRUCTION SCHEDULE

- A. Bar-Chart Schedule: Prepare a fully developed, horizontal bar-chart-type, contractor's construction schedule. Submit within 3 days after the date established for "Commencement of the Work."
 - 1. Provide a separate time bar for each significant construction activity. Provide a continuous vertical line to identify the first working day of each week.
 - 2. Within each time bar, indicate estimated completion percentage in 10 percent increments. As Work progresses, place a contrasting mark in each bar to indicate Actual Completion.
 - 3. Prepare the schedule on a sheet, or series of sheets, of stable transparency, or other reproducible media, of sufficient width to show data for the entire construction period.
 - 4. Secure time commitments for performing critical elements of the Work from parties involved. Coordinate each element on the schedule with other construction activities; include minor elements involved in the sequence of the Work. Show each activity in proper sequence. Indicate graphically the sequences necessary for completion of related portions of the Work.
 - 5. Coordinate the Contractor's Construction Schedule with the Schedule of Values, list of subcontracts, Submittal Schedule, progress reports, payment requests, and other schedules.
 - 6. Indicate Clearance of each Work Area in advance of the dates established for Clearance. Allow time for testing and other Designer's procedures necessary for certification of Clearance.
 - 7. Indicate completion in advance of the date established for Substantial Completion. Indicate Substantial Completion on the schedule to allow time for the Designer's procedures necessary for certification of Substantial Completion.
 - 8. Indicate completion and Clearance of each Work Area in advance of the date established for Substantial Completion. Allow time for testing and other Designer's procedures necessary for certification of Clearance and Substantial Completion.
- B. Phasing: On the schedule, show how requirements for phased completion to permit Work by separate Contractors and partial occupancy by the Owner affect the sequence of Work.
- C. Work Stages: Indicate important stages of construction for each major portion of the Work, including submittal review, testing, and installation.
 - 1. Non-asbestos demolitions.

© 4/27/21 20046 CONSULTING Specifications 02 80 15-5

- 2. Preparation of the Work Area.
- 3. Asbestos removal.
- **4.** Clearance testing.
- 5. Substantial Completion.
- D. Area Separations: Provide a separate time bar to identify each major construction area for each major portion of the Work. Indicate where each element in an area must be sequenced or integrated with other activities.
- **E. Cost Correlation:** At the head of the schedule, provide a cost correlation line, indicating planned and actual costs. On the line, show dollar volume of Work performed as of the dates used for preparation of payment requests.
- **F. Distribution:** Following response to the initial submittal, print and distribute copies to the Designer, Owner, subcontractors, and other parties required to comply with scheduled dates. Post copies in the Project meeting room and temporary field office.
 - 1. When revisions are made, distribute to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned portion of the Work and are no longer involved in construction activities.
- **G. Schedule Updating:** Revise the schedule after each meeting, event, or activity where revisions have been recognized or made. Issue the updated schedule concurrently with the report of each meeting.

1.10 ADMINISTRATIVE AND SUPERVISORY PERSONNEL

- **A.** Project Supervisor: Provide a full-time Project Supervisor at the work site who is experienced in administration and supervision of asbestos abatement projects including work practices, protective measures for building and personnel, disposal procedures, project scheduling, management, etc. This person is the Contractor's Representative, and will function as the 'competent person' at the work site responsible for compliance with all applicable federal, state and local regulations, particularly those relating to ACM.
 - 1. Training: The General Superintendent must have a current certification from a state approved trainer for a course that meets the requirements of the EPA Model Accreditation Plan for asbestos abatement contractor/supervisor (40 CFR part 763, Subpart E, Appendix C).
 - **2.** Experience: The General Superintendent must have demonstrable experience in the successful management of asbestos abatement projects that are similar to the work of this contract.
 - a. The General Superintendent must have a minimum of two (2) years' experience in the on-site management of asbestos abatement projects.
 - b. The General Superintendent must have had responsible charge of a minimum of ten (10) asbestos abatement projects similar in size and type to the work of this contract.

Page 5 of 9

- Competent Person: The General Superintendent is to be a Competent Person as required by OSHA in 29 CFR 1926.
- **B.** Supervisors / Forepersons: Provide full-time Supervisors / Forepersons who are experienced in the supervision of asbestos abatement work areas including work practices, building and personnel, disposal practices, etc. These persons are contractor employees directly responsible to the General Superintendent.
- **C.** Accreditation: The General Superintendent, Supervisors and Forepersons are to be accredited as an Asbestos Abatement Supervisor in accordance with the AHERA regulation 40 CFR Part 763, Subpart E, Appendix C.

Section 02 80 15 © 4/27/21 20046 WYNN L, WHIT

Specifications 02 80 15-6

1.11 PRE-CONSTRUCTION CONFERENCE:

- A. An initial progress meeting, recognized as "Pre-Construction Conference" will be convened by the Designer prior to start of any work. The preconstruction conference will be scheduled before start of construction, at a time convenient to the Owner and the Designer. Meet at the project site, or as otherwise directed, with General Superintendent, Owner, Designer, Project Administrator, and other entities concerned with the asbestos abatement work.
- **B.** Attendees: Authorized representatives of the Owner, Designer, and their consultants will be in attendance. An authorized representative of the Contractor and its superintendent; major subcontractors; manufacturers; suppliers; and other concerned parties shall attend the conference. All participants at the conference shall be familiar with the Project and authorized to conclude matters relating to the Work.
 - 1. 72 hours' advance notice will be provided to all participants prior to convening Pre-Construction Conference.
- **C. Agenda:** This is an organizational meeting, to review responsibilities and personnel assignments, to locate regulated areas and temporary facilities including power, light, water, etc. Items of significance that could affect progress will be discussed, including the following:
 - 1. Tentative construction schedule.
 - 2. Critical work sequencing.
 - **3.** Designation of responsible personnel.
 - **4.** Procedures for processing field decisions and Change Orders.
 - 5. Procedures for processing Applications for Payment.
 - **6.** Distribution of Contract Documents.
 - 7. Submittal of Shop Drawings, Product Data, and Samples.
 - 8. Preparation of record documents.
 - **9.** Use of the premises.
 - 10. Parking availability.
 - 11. Office, work, and storage areas.
 - 12. Equipment deliveries and priorities.
 - 13. Safety procedures.
 - **14.** First aid.
 - **15.** Security.
 - **16.** Housekeeping.
 - 17. Working hours.

1.12 PROGRESS MEETINGS:

Section 02 80 15

- **A. General:** In addition to specific coordination and pre-installation meetings for each element of work, and other regular project meetings held for other purposes, the Designer will hold general progress meetings as required. These meeting will be scheduled, where possible, at time of preparation of payment request.
- **B.** Attendees: Representatives of the Owner and Designer will attend these meetings. In addition to representatives of the Contractor, each subcontractor, supplier, or other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the conference shall be familiar with the Project and authorized to conclude matters relating to the work. Require each entity then involved in planning, coordination or performance of work to be properly represented at each meeting.
- **C. Agenda:** Be prepared to discuss the following items at the progress meetings. Review other items of significance that could affect progress.
 - 1. Contractor's Construction Schedule: Review progress since the last meeting. Determine where each activity is in relation to the Contractor's Construction Schedule, whether on time or ahead or behind

© 4/27/21 20046 WYNN L WHITE

Wynn L. White Consulting Engineers, Inc. (225) 761-9141



Specifications 02 80 15-7

> schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to insure that current and subsequent activities will be completed within the Contract Time.

- 2. Review the present and future needs of each entity present, including the following:
 - a. Interface requirements.
 - b. Time.
 - Sequences. c.
 - Status of submittals. d.
 - Deliveries. e.
 - f. Access.
 - Site utilization. g.
 - Temporary facilities and services. h.
 - Hours of work. i.
 - Hazards and risks.
 - Housekeeping. k.
 - I. Quality and work standards.
 - Change Orders. m.
 - Documentation of information for payment requests. n.
- D. Reporting: Revise the Contractor's Construction Schedule after each progress meeting where revisions to the schedule have been made or recognized. Issue the revised schedule no later than 3 days after each meeting. Include a brief summary, in narrative form, of progress since the previous meeting and report.

1.13 **COORDINATION MEETINGS**

A. Attend project coordination meetings that will be conducted as required by the Designer at regular intervals convenient for all parties involved. Project coordination meetings are intended to coordinate the work of all contractors performing work on the site, and are in addition to specific meetings held for other purposes, such as regular progress meetings.

1.14 RECORD KEEPING:

- A. Daily Log: Maintain a Daily Log (in an area accessible to the Owner, Designer and Project Administrator) as a bound, sequential, hand-written record carefully prepared daily that documents but is not limited to the following items:
 - 1. Meetings; purpose, attendees, brief discussion
 - 2. Special or unusual events, i.e. barrier breeching, equipment failures, accidents
 - 3. Documentation of Contractor's completion of the following:
 - Inspection of work area preparation prior to start of removal and daily thereafter. a.
 - b. Removal of any sheet plastic barriers.
 - Contractor's inspections prior to spray back, lock back, encapsulation, enclosure or any other c. operation that will conceal the condition of ACM or the substrate from which such materials have been removed.
 - d. Removal of waste materials from work area.
 - e. Decontamination of equipment (list items).
 - Contractors final inspection/final air test analysis.
- В. Entry/Exit Log: Maintain within the Decontamination Unit a daily log documenting the dates and time of but not limited to, the following items:

© 4/27/21 20046 CONSULTING

Wynn L. White Consulting Engineers, Inc. (225) 761-9141

Specifications 02 80 15-8

- 1. Visitations; authorized and unauthorized with the following information
 - Name
 - b. Organization
 - c. Entry time
 - d. Exit Time
 - e. Respiratory protection
- 2. Personnel, by name, entering and leaving the work area with the following information
 - a. Printed Name
 - b. Identification Number
 - c. Entry Time
 - d. Exit Time
 - e. Respiratory Protection
- **C. Air Monitoring Results:** Post personnel and area air monitoring results in Decontamination Unit within 24 hours of sample collection. Post the respiratory protection requirements for the work in progress.
- D. Records in Decontamination Unit: Maintain the following documentation in the Decontamination Unit, in a location accessible to workers.
 - 1. Documentation of inspections by OSHA, EPA or local authority
 - 2. Respiratory Protection Program.
- **E. Other records:** Maintain other documentation in a location that is accessible to the Owner, Designer, and Project Administrator including:
 - 1. Waste Manifests and shipping records
 - Landfill receipts.
 - 3. Accident reports.

1.15 SPECIAL REPORTS:

- **A. General:** Except as otherwise indicated, submit special reports directly to Owner within one day of occurrence requiring special report, with copy to Designer and others affected by occurrence.
- **B.** Reporting Unusual Events: When an event of unusual and significant nature occurs at site (examples: failure of pressure differential system, rupture of temporary enclosures), prepare and submit report. List chain of events, persons participating, response by Contractor's personnel, evaluation of results or effects, and similar pertinent information. When such events are known or predictable in advance, advise Owner in advance at earliest possible date.
- C. Reporting Accidents: Prepare and submit reports of significant accidents, at site and anywhere else work is in progress. Record and document data and actions; comply with industry standards. For this purpose, a significant accident is defined to include events where personal injury is sustained, property loss of substance is sustained, or where the event posed a significant threat of loss or personal injury, or where work was stopped for over four hours during a scheduled shift.
- **D. Report Discovered Conditions:** When an unusual condition of the building is discovered during the work (e.g. leaks, termites, corrosion) prepare and submit a special report indication condition discovered.

1.16 SUBMITTALS

Section 02 80 15

A. Before the Start of Work: Submit the following to the Designer in the same manner as product data. Do not begin work until these submittals are returned with designer's action stamp indicating that all submittals have been "received-not reviewed".

Wynn L. White Consulting Engineers, Inc. (225) 761-9141

© 4/27/21 20046



Specifications 02 80 15-9

- **1.** Plan of Action.
- 2. Contingency Plans.
- 3. Project Directory.
- **4.** Notifications: copy of notification sent to other entities at the work site, notification sent to Louisiana Department of Environmental Quality, emergency service agencies, and all other notifications as directed by the Owner or Owner's Representative.
- **5.** Pre-Construction Inspection: Report on inspection carried out as required by this section. Include copies of all photographs, video recordings, etc.
- **6.** Contractor's Construction Schedule.
- 7. Accreditation: Submit evidence in the form of training course certificates for the General Superintendent, Supervisors, and Forepersons as asbestos abatement supervisors in accordance with AHERA requirements. Submit evidence in the form of training course certificates that each worker is trained as an asbestos abatement worker in accordance with AHERA requirements.
- **8.** Resume: Submit resume of General Superintendent.
- **B. Project Close-out:** Submit two (2) copies for information purposes of all documents indicated in the following sections at final closeout of project as a project close-out submittal.
 - 1. Section on Record Keeping.
 - 2. Section on Special Reports.

PART 2 - PRODUCTS (Not Applicable)

PART 3 – EXECUTION (Not Applicable)

END OF SECTION - 02 80 15

© 4/27/21 20046 WYNN L, WHITE

Specifications 02 80 21-1

SECTION 02 80 21 - REFERENCE STANDARDS AND DEFINITIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, and other Division 01 and 02 Specification Sections apply to this Section.

1.2 DEFINITIONS

- A. General: Basic contract definitions are included in the Conditions of the Contract.
 - 1. "Indicated": The term "indicated" refers to graphic representations, notes, or schedules on the Drawings, or other paragraphs or Schedules in the Specifications, and similar requirements in the Contract Documents. Terms such as "shown," "noted," "scheduled," and "specified" are used to help the reader locate the reference. Location is not limited.
 - 2. "Directed": Terms such as "directed," "requested," "authorized," "selected," "approved," "required," and "permitted" mean directed by the Designer, requested by the Designer, and similar phrases.
 - **3.** "Approved": The term "approved," when used in conjunction with the Designer's action on the Contractor's submittals, applications, and requests, is limited to the Designer's duties and responsibilities as stated in the Conditions of the Contract.
 - **4.** "Regulations": The term "regulations" includes laws, ordinances, statutes, and lawful orders issued by authorities having jurisdiction, as well as rules, conventions, and agreements within the construction industry that control performance of the Work.
 - **5.** "Furnish": The term "furnish" means supply and deliver to the Project Site, ready for unloading, unpacking, assembly, installation, and similar operations.
 - **6.** "Install": The term "install" describes operations at the Project Site including the actual unloading, unpacking, assembly, erecting, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning, and similar operations.
 - 7. "Provide": The term "provide" means to furnish and install, complete and ready for the intended use.
 - **8.** "Installer": An installer is the Contractor or another entity engaged by the Contractor, either as an employee, subcontractor, or contractor of lower tier, to perform a particular construction activity, including installation, erection, application, or similar operations. Installers are required to be experienced in the operations they are engaged to perform.
 - a. The term "experienced," when used with the term "installer," means having a minimum of 5 previous projects similar in size and scope to this Project, being familiar with the special requirements indicated, and having complied with requirements of authorities having jurisdiction.
 - b. Trades: Using terms such as "carpentry" does not imply that certain construction activities must be performed by accredited or unionized individuals of a corresponding generic name, such as "carpenter." It also does not imply that requirements specified apply exclusively to trades persons of the corresponding generic name.

Section 02 80 21 © 4/27/21 20046 WYNN L. WHIT

Specifications

- c. Assigning Specialists: Certain Sections of the Specifications require that specific construction activities shall be performed by specialists who are recognized experts in those operations. The specialists must be engaged for those activities, and their assignments are requirements over which the Contractor has no option. However, the ultimate responsibility for fulfilling contract requirements remains with the Contractor.
 - This requirement shall not be interpreted to conflict with enforcing building codes and similar regulations governing the Work. It is also not intended to interfere with local trade-union jurisdictional settlements and similar conventions.
- 9. "Project Site" is the space available to the Contractor for performing construction activities, either exclusively or in conjunction, with others performing other work as part of the Project. The extent of the Project Site is shown on the Drawings and may or may not be identical with the description of the land on which the Project is to be built.
- **10.** "Testing Agencies": A testing agency is an independent entity engaged to perform specific inspections or tests, either at the Project Site or elsewhere, and to report on and, if required, to interpret results of those inspections or tests.
- 11. "Designer": This is the entity described as the "Architect" in AIA Document A201 "General Conditions of the Contract for Construction," or is the entity described as "Engineer" in Engineers Joint Contract Document Committee (EJCDC) Document 1910-8 "Standard General Conditions of the Construction Contract." All references to Architect or Engineer in the Contract Documents in all cases refer to the Designer. The Designer will represent the Owner during construction and until final payment is due. The Designer will advise and consult with the Owner. The Owner's instructions to the Contractor will be forwarded through the Designer.
- 12. "Project Administrator": This is the entity described as the "Project Representative" in AIA Document A201 "General Conditions of the Contract for Construction," or is the entity described as "Engineer" in Engineers Joint Contract Document Committee (EJCDC) Document 1910-8 "Standard General Conditions of the Construction Contract." The Project Administrator is a full time representative of the Owner at the job site with authority to stop the work upon written or verbal order if requirements of the Contract Documents are not met, or if in the sole judgement of the Project Administrator, Designer, or Owner, the interests of the Owner, safety of any person or the Owner's property are jeopardized by the work.
- **13.** "Stop Work Order": is a written order to cease work activities. The Contractor must maintain work area isolation during the period that a Stop Work Order is in affect.
- **14.** "General Superintendent": This is the Contractor's Representative at the work site. This person must be a Competent Person as defined by OSHA in 29 CFR 1926.
- **15.** "Working Day": Monday through Friday and includes holidays that fall on any of the days Monday through Friday as indicated in the notification requirements.

1.3 SPECIFICATION FORMAT AND CONTENT EXPLANATION

- A. Specification Format: These Specifications are organized into Divisions and Sections based on CSI 2004 MasterFormat's numbering system.
- B. Specification Content: This Specification uses certain conventions regarding the style of language and Section 02 80 21 © 4/27/21 20046 WYNN L, WHITE

Specifications 02 80 21-3

the intended meaning of certain terms, words, and phrases when used in particular situations or circumstances. These conventions are explained as follows:

- 1. Abbreviated Language: Language used in Specifications and other Contract Documents is abbreviated. Words and meanings shall be interpreted as appropriate. Words implied, but not stated, shall be interpolated as the sense requires. Singular words will be interpreted as plural and plural words interpreted as singular where applicable as the context of the Contract Documents indicates.
- 2. Streamlined Language: The Specifications generally use the imperative mood and streamlined language. Requirements expressed in the imperative mood are to be performed by the Contractor. At certain locations in the Text, subjective language is used for clarity to describe responsibilities that must be fulfilled indirectly by the Contractor or by others when so noted.

1.4 INDUSTRY STANDARDS

- A. Applicability of Standards: Except where the Contract Documents include more stringent requirements, applicable construction industry standards have the same force and effect as if bound or copied directly into the Contract Documents to the extent referenced. Such standards are made a part of the Contract Documents by reference.
- B. **Publication Dates:** Comply with the standards in effect as of the date of the Contract Documents.
- C. Conflicting Requirements: Where compliance with 2 or more standards is specified and the standards establish different or conflicting requirements for minimum quantities or quality levels, comply with the most stringent requirement. Refer to the Designer before proceeding for a decision on requirements that are different but apparently equal, and where it is uncertain which requirement is the most stringent.
 - 1. Minimum Quantity or Quality Levels: The quantity or quality level shown or specified shall be the minimum acceptable. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as appropriate, for the context of the requirements. Refer uncertainties to the Designer for a decision before proceeding.
- D. Copies of Standards: Each entity engaged in construction on the Project is required to be familiar with industry standards applicable to its construction activity. Copies of applicable standards are not bound with the Contract Documents.
 - 1. Where copies of standards are needed to perform a required construction activity, the Contractor shall obtain copies directly from the publication source.
- E. Abbreviations and Names: Trade association names and titles of general standards are frequently abbreviated. Where such acronyms or abbreviations are used in the Specifications or other Contract Documents, they mean the recognized name of the trade association, standards-generating organization, authorities having jurisdiction, or other entity applicable to the context of the text provision. Refer to Gale Research Co.'s "Encyclopedia of Associations," available in most libraries.
 - 1. **ACI American Concrete Institute** P.O. Box 19150 Detroit, MI 48219 (313) 532-2600
 - 2. ACIL American Council of Independent Laboratories

© 4/27/21 20046 Page 3 of 7

Section 02 80 21 Reference Standards and Definitions

Specifications 02 80 21-4

1629 K St., NW Washington, DC 20006 (202) 887-5872

 ACPA American Concrete Pipe Assoc. 8300 Boone Blvd., Suite 400
 Vienna, VA 22182 (703) 821-1990

 ACGIH American Conference of Governmental Industrial Hygienists 1330 Kemper Meadow Dr. Cincinnati, OH 45240 (513) 742-2020

AIA The American Institute of Architects
 1735 New York Ave., NW
 Washington, DC 20006 (202) 626-7300

AIHA American Industrial Hygiene Assoc.
 2700 Prosperity Ave., Suite 250
 Fairfax, VA 22031 (703) 849-8888

ANSI American National Standards Institute
 West 42nd St., 13th Floor
 New York, NY 10036 (212) 642-4900

8. ASHRAE American Society of Heating, Refrigerating and Air-Conditioning Engineers 1791 Tullie Circle, NE Atlanta, GA 30329 (404) 636-8400

 ASME American Society of Mechanical Engineers 345 East 47th St. New York, NY 10017 (212) 705-7722

 ASPE American Society of Plumbing Engineers 3617 Thousand Oaks Blvd., Suite 210 Westlake, CA 91362 (805) 495-7120

ASTM American Society for Testing and Materials
 100 Barr Harbor Drive
 West Conshohocken, PA 19428-2959 (610) 832-9585

CGA Compressed Gas Assoc.
 1725 Jefferson Davis Highway, Suite 1004
 Arlington, VA 22202-4100 (703) 412-0900

13. FM Factory Mutual Systems1151 Boston-Providence TurnpikeP.O. Box 9102Norwood, MA 02062 (617) 762-4300

14. GA Gypsum Association810 First St., NE, Suite 510Washington, DC 20002 (202) 289-5440

© 4/27/21 20046 WYNN L, WHIT

Section 02 80 21 **Reference Standards and Definitions**

02 80 21-5 Specifications

15. IEEE Institute of Electrical and Electronic Engineers 345 E. 47th St. New York, NY 10017 (212) 705-7900

16. IETA International Electrical Testing Assoc. P.O. Box 687

Morrison, CO 80465 (303) 697-8441

17. IRI Industrial Risk Insurers

> P.O. Box 5010 85 Woodland St.

Hartford, CT 06102-5010 (203) 520-7300

18. ISA Instrument Society of America

P.O. Box 12277

67 Alexander Dr.

Research Triangle Park, NC 27709 (919) 549-8411

- 19. ISO International Standards Organization
- 20. NEC National Electrical Code (from NFPA)
- 21. NECA National Electrical Contractors Assoc. 3 Bethesda Metro Center, Suite 1100 Bethesda, MD 20814 (301) 657-3110
- 22. NEMA National Electrical Manufacturers Assoc.

2101 L St., NW, Suite 300

Washington, DC 20037 (202) 457-8400

23. NFPA National Fire Protection Assoc.

One Batterymarch Park

P.O. Box 9101

Quincy, MA 02269-9101 (617) 770-3000 (800) 344-3555

24. NRCA National Roofing Contractors Assoc.

10255 W. Higgins Rd., Suite 600

Rosemont, IL 60018-5607 (708) 299-9070

25. RFCI Resilient Floor Covering Institute

966 Hungerford Dr., Suite 12-B

Rockville, MD 20805 (301) 340-8580

26. **UL Underwriters Laboratories**

333 Pfingsten Rd.

Northbrook, IL 60062 (708) 272-8800

27. White Lung Association

PO Box 1483

Baltimore, MD 21203

© 4/27/21 20046

Specifications 02 80 21-6

E. Federal Government Agencies: Names and titles of federal government standard- or Specification-producing agencies are often abbreviated. The following acronyms or abbreviations referenced in the Contract Documents indicate names of standard- or Specification-producing agencies of the federal government. Names and addresses are subject to change and are believed, but are not assured, to be accurate and up-to-date as of the date of the Contract Documents.

CE Corps of Engineers

 (U.S. Department of the Army)
 Chief of Engineers - Referral

 Washington, DC 20314 (202) 272-0660

CFR Code of Federal Regulations
 (Available from the Government Printing Office)
 N. Capitol St. between G and H St., NW
 Washington, DC 20402 (202) 783-3238
 (Material is usually first published in the "Federal Register")

 CPSC Consumer Product Safety Commission 5401 Westbard Ave.
 Bethesda, MD 20207 (800) 638-2772

4. CS Commercial Standard (U.S. Department of Commerce) Government Printing Office Washington, DC 20402 (202) 783-3238

DOC Department of Commerce
 14th St. and Constitution Ave., NW
 Washington, DC 20230 (202) 482-2000

6. DOT Department of Transportation 400 Seventh St., SW Washington, DC 20590 (202) 366-4000

7. EPA Environmental Protection Agency 401 M St., SW Washington, DC 20460 (202) 260-2090

8. FS Federal Specification (from GSA) Specifications Unit (WFSIS) 7th and D St., SW Washington, DC 20407 (202) 708-9205

9. GSA General Services Administration F St. and 18th St., NW Washington, DC 20405 (202) 708-5082

MIL Military Standardization Documents (U.S. Department of Defense) Naval Publications and Forms Center 5801 Tabor Ave. Philadelphia, PA 19120

Section 02 80 21

© 4/27/21 20046 WYNN L, WHITE

Section 02 80 21 Reference Standards and Definitions

Specifications 02 80 21-7

 NIST National Institute of Standards and Technology (U.S. Department of Commerce)
 Gaithersburg, MD 20899 (301) 975-2000

12. OSHA Occupational Safety and Health Administration (U.S. Department of Labor)200 Constitution Ave., NWWashington, DC 20210 (202) 219-6091

13. PS Product Standard of NBS (U.S. Department of Commerce) Government Printing Office Washington, DC 20402 (202) 783-3238

14. USPS U.S. Postal Service475 L'Enfant Plaza, SWWashington, DC 20260-0010 (202) 268-2000

15. Louisiana Department of Environmental Quality Office of Environmental Compliance P.O. Box 82215 Baton Rouge, La. 70884-2215 (225) 765-0634

- **F. Trade Union Jurisdictions:** The Contractor shall maintain, and require subcontractors to maintain, complete current information on jurisdictional matters, regulations and pending actions, as applicable to construction activities. The manner in which Contract Documents have been organized and subdivided is not intended to be indicative of trade union or jurisdictional agreements.
 - 1. Discuss new developments at project meetings at the earliest feasible dates. Record relevant information and actions agreed upon.
 - 2. Assign and subcontract construction activities, and employ tradesmen and laborers in a manner that will not unduly risk jurisdictional disputes that could result in conflicts, delays, claims and losses.

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION (Not Applicable)

END OF SECTION 02 80 21

© 4/27/21 20046 WYNN L, WHITE

02 80 22-1 Specifications

SECTION 02 80 22 - CODES, REGULATIONS AND STANDARDS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, and other Division 01 and 02 Specification Sections apply to

1.2 SUMMARY

- A. This section sets forth governmental regulations which are included and incorporated herein by reference and made a part of the specification. This section also sets forth those notices and permits which are known to the Owner and which either must be applied for and received, or which must be given to governmental agencies before start of work.
 - 1. Requirements include adherence to work practices and procedures set forth in applicable codes, regulations and standards.
 - 2. Requirements include obtaining permits, licenses, inspections, releases and similar documentation, as well as payments, statements and similar requirements associated with codes, regulations, and standards.

1.3 CODES, REGULATIONS AND STANDARDS

- A. General Applicability of Codes, Regulations and Standards: Except to the extent that more explicit or more stringent requirements are written directly into the Contract Documents, all applicable codes and regulations have the same force and effect (and are made a part of the contract documents by reference) as if copied directly into the Contract Documents, or as if published copies are bound herewith.
- В. Contractor Responsibility: The Contractor shall assume full responsibility and liability for the compliance with all applicable Federal, State, and local regulations pertaining to work practices, hauling, disposal, and protection of workers, visitors to the site, and persons occupying areas adjacent to the site. The Contractor is responsible for providing medical examinations and maintaining medical records of personnel as required by the applicable Federal, State, and local regulations. The Contractor shall hold the Owner and Designer harmless for failure to comply with any applicable work, hauling, disposal, safety, health or other regulation on the part of the contractor, the contractor's employees, or subcontractors.
- C. Federal Requirements: which govern renovation work or hauling and disposal of waste materials include but are not limited to the following:
 - OSHA: U.S. Department of Labor, Occupational Safety and Health Administration, (OSHA), 1. including but not limited to:

© 4/27/21 20046 Section 02 80 22 Page 1 of 3

Section 02 80 22 Codes, Regulations and Standards

Specifications 02 80 22-2

a. Respiratory Protection

Title 29, Part 1910, Section 134 of the Code of Federal Regulations Title 29, Part 1926, Section 103 of the Code of Federal Regulations

- Personal Protective Equipment for General Industry
 Title 29, Part 1910, Section 132 of the Code of Federal Regulations
 Title 29, Part 1926, Sections 95 107 of the Code of Federal Regulations
- Access to Employee Exposure and Medical Records
 Title 29, Part 1926, Section 33 of the Code of Federal Regulations
- d. Hazard Communication
 Title 29, Part 1926, Section 59 of the Code of Federal Regulations
- e. Specifications for Accident Prevention Signs and Tags
 Title 29, Part 1910, Section 145 of the Code of Federal Regulations
- f. Permit Required Confined Space
 Title 29, Part 1910, Section 146 of the Code of Federal Regulations
- g. Construction Industry
 Title 29, Part 1910, Section 1001 of the Code of Federal Regulations
 Title 29, Part 1926, Section 1101 of the Code of Federal Regulations
- Construction Industry General Duty Standards
 Title 29, Part 1926, Sections 20 through 35 of the Code of Federal Regulations
- 2. DOT: U. S. Department of Transportation, including but not limited to:
 - Hazardous Substances
 Title 49, Part 171 and 172 of the Code of Federal Regulations
 - Hazardous Material Regulations
 General Awareness and Training Requirements for Handlers, Loaders and Drivers
 Title 49, Parts 171-180 of the Code of Federal Regulations
 - Hazardous Material Regulations
 Editorial and Technical Revisions
 Title 49, Parts 171-180 of the Code of Federal Regulations
- 3. EPA: U. S. Environmental Protection Agency (EPA), including but not limited to:
 - a. National Emission Standard for Hazardous Air Pollutants (NESHAP)
 National Emission Standard for Asbestos
 Title 40, Part 61, Sub-part A, and Sub-part M (Revised Sub-part B) of the Code of Federal Regulations
- **D. State Requirements:** which govern work or hauling and disposal of asbestos waste materials include but are not limited to the following: LAC 33:III:51 and LAC 33:III:51.

Abide by all local requirements which govern renovation work or hauling and disposal of waste materials.

© 4/27/21 20046 WYNN L, WHIT Page 2 of 3

Specifications 02 80 22-3

1.4 PERMITS:

Contractor is responsible for obtaining any demolition, building, renovation or other permits, and for paying application fees, if any, where required by State or Local jurisdictions.

1.5 LICENSES:

A. Licenses: Maintain current licenses as required by applicable state or local jurisdictions for the removal, transporting, disposal or other regulated activity relative to the work of this contract.

1.4 POSTING AND FILING OF REGULATIONS

A. Posting and Filing of Regulations: Post all notices required by applicable federal, state and local regulations. Maintain two (2) copies of applicable federal, state and local regulations and standard. Maintain one copy of each at job site. Keep on file in Contractor's office one copy of each.

1.5 SUBMITTALS:

- **A. Before Start of Work:** Submit the following to the Designer for review. No work shall begin until these submittals are returned with Designer's action stamp indicating that the submittal is returned for unrestricted use or final-but-restricted use.
 - 1. Permits, Licenses, and Certificates: For the Owner's records, submit copies of permits, licenses, certifications, inspection reports, releases, jurisdictional settlements, notices, receipts for fee payments, judgments, and similar documents, correspondence and records established in conjunction with compliance with standards and regulations bearing upon performance of the Work including:
 - State and Local Regulations: Submit copies of codes and regulations applicable to the work.
 - 2. Notices: Submit notices required by federal, state and local regulations together with proof of timely transmittal to agency requiring the notice.
 - 3. Permits: Submit copies of current valid permits required by state and local regulations.
 - **4.** Licenses: Submit copies of all State and local licenses and permits necessary to carry out the work of this contract.

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION (Not Applicable)

END OF SECTION - 02 80 22

© 4/27/21 20046 WYNN L, WHIT

Specifications 02 80 30-1

SECTION 02 80 30 - SUBMITTALS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 2 Specification Sections, apply to this Section.

1.2 SUMMARY

- **A.** This Section includes administrative and procedural requirements for submittals required for performance of the Work, including the following:
 - 1. Submittal schedule.
 - 2. Daily construction reports.
 - 3. Shop Drawings.
 - 4. Product Data.
 - 5. Samples.
 - 6. Quality Assurance Submittals
- **B.** Administrative Submittals: Refer to other Division 2 Sections and other Contract Documents for requirements for administrative submittals. Such submittals include, but are not limited to, the following:
 - 1. Permits
 - 2. List of Subcontractors

C. RELATED SECTIONS

- 1. The following Sections contain requirements that relate to this Section:
 - Section "Coordination" specifies requirements governing submittal and distribution of meeting and conference minutes.
 - b. Section "Project Closeout" specifies requirements for submittal of Project Record Documents and warranties at project closeout.

1.3 SUBMITTAL PROCEDURES

- A. Coordination: Coordinate preparation and processing of submittals with performance of construction activities. Transmit each submittal sufficiently in advance of performance of related construction activities to avoid delay.
 - Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
 - Coordinate transmittal of different types of submittals for related elements of the Work so processing will not be delayed by the need to review submittals concurrently for coordination.
 - a. The Designer reserves the right to withhold action on a submittal requiring coordination with other submittals until all related submittals are received.
- **B. Processing:** To avoid the need to delay installation as a result of the time required to process submittals, allow sufficient time for submittal review, including time for resubmittals.

© 4/27/21 20046 W

Section 02 80 30

Specifications 02 80 30-2

No extension of Contract Time will be authorized because of failure to transmit submittals to the Designer sufficiently in advance of the Work to permit processing.

- **C. Submittal Preparation:** Place a permanent label or title block on each submittal for identification. Indicate the name of the entity that prepared each submittal on the label or title block.
 - 1. Provide a space approximately 4 by 5 inches (100 by 125 mm) on the label or beside the title block on Shop Drawings to record the Contractor's review and approval markings and the action taken.
 - 2. Include the following information on the label for processing and recording action taken.
 - a. Project name.
 - b. Date.
 - c. Name and address of the Designer.
 - d. Name and address of the Contractor.
 - e. Name and address of the supplier.
 - f. Name of the manufacturer.
 - g. Number and title of appropriate Specification Section.
 - h. Drawing number and detail references, as appropriate.
 - 3. Place a permanent label or title block on each submittal for identification. Indicate the name of the entity that prepared each submittal on the label or title block.
 - 4. Contractor shall transmit all submittals in electronic format (email to Designer or via CD-ROM). Contractor shall use latest version of Microsoft Word, Microsoft Excel, or Adobe PDF file formats for submittal preparation.
- D. Submittal Transmittal: Package each submittal appropriately for transmittal and handling. Transmit each submittal from the Contractor to the Designer using a transmittal form. The Designer will not accept submittals received from sources other than the Contractor.
 - 1. On the transmittal, record relevant information and requests for data. On the form, or separate sheet, record deviations from Contract Document requirements, including variations and limitations. Include Contractor's certification that information complies with Contract Document requirements.
- E. Transmittal Form: Use AIA Document G810.

1.4 SUBMITTAL SCHEDULE

Section 02 80 30

- **A. Submittal Schedule:** After development and acceptance of the Contractor's Construction Schedule, prepare a complete schedule of submittals.
 - 1. Coordinate Submittal Schedule with the list of products as well as the Contractor's Construction Schedule.
 - **2.** Prepare the schedule in chronological order. Provide the following information:
 - a. Scheduled date for the first submittal.
 - b. Related Section number.
 - c. Submittal category (Shop Drawings, Product Data, or Samples).
 - d. Description of the part of the Work covered.
 - e. Scheduled date for resubmittal.

© 4/27/21 20046 WYNN

WYNN L. WHITE
CONSULTING
ENGINEERS, INC.

Specifications 02 80 30-3

- f. Scheduled date for the Designer's final release or approval.
- В. Distribution: Following response to the initial submittal, print and distribute copies to the Designer, Owner, subcontractors, and other parties required to comply with submittal dates indicated. Post copies at the jobsite.
 - 1. When revisions are made, distribute to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned portion of the Work and are no longer involved in construction activities.
- C. Schedule Updating: Revise the schedule after each meeting or activity where revisions have been recognized or made. Issue the updated schedule concurrently with the report of each meeting.

SHOP DRAWINGS 1.5

- A. Submit newly prepared information drawn accurately to scale. Highlight, encircle, or otherwise indicate deviations from the Contract Documents. Do not reproduce Contract Documents or copy standard information as the basis of Shop Drawings. Standard information prepared without specific reference to the Project is not a Shop Drawing.
- В. Shop Drawings include fabrication and installation Drawings, setting diagrams, schedules, patterns, templates and similar Drawings. Include the following information:
 - 1. Dimensions.
 - 2. Identification of products and materials included by sheet and detail number.
 - 3. Compliance with specified standards.
 - 4. Notation of coordination requirements.
 - 5. Notation of dimensions established by field measurement.
- C. Drawing Format and Sheet Size: Submit Drawings in AutoCad 2009 and Adobe Acrobat compatible format to plot on sheets at least 8-1/2 by 11 inches (215 by 280 mm) but no larger than 36 by 48 inches (890 by 1220 mm).
- D. Initial Submittal: Submit one copy for the Designer's review.
- E. Final Submittal: Submit one copy with closeout documentation.
 - 1. One of the prints returned shall be marked up and maintained as a "Record Document."
 - 2. Do not use Shop Drawings without an appropriate final stamp indicating action taken.

1.6 PRODUCT DATA

- A. Collect Product Data into a single submittal. Product Data includes information such as manufacturer's installation instructions, catalog cuts, standard wiring diagrams and performance curves. Where Product Data must be specially prepared because standard printed data is not suitable for use, submit as "Shop Drawings."
 - 1. Mark each copy to show applicable choices and options. Where Product Data includes information on several products, some of which are not required, mark copies to indicate the applicable information. Include the following information:
 - Manufacturer's printed recommendations.

© 4/27/21 20046 Page 3 of 6

02 80 30-4 Specifications

- b. Compliance with recognized trade association standards.
- Compliance with recognized testing agency standards. c.
- d. Application of testing agency labels and seals.
- Notation of dimensions verified by field measurement. e.
- f. Notation of coordination requirements.
- 2. Do not submit Product Data until compliance with requirements of the Contract Documents has been confirmed.
- В. Preliminary Submittal: Submit a preliminary single-copy of Product Data where selection of options is required.
- C. Submittals: Submit 1 electronic copy of each required submittal. The Designer will will return the submittal with action taken and corrections or modifications required.
 - 1. Unless noncompliance with Contract Document provisions is observed, the submittal may serve as the final submittal.
- D. Distribution: Furnish copies of final submittal to installers, subcontractors, suppliers, manufacturers, fabricators, and others required for performance of construction activities. Show distribution on transmittal forms.
 - 1. Do not proceed with installation until a final submittal is in the installer's possession.
 - 2. Do not permit use of unmarked copies of Product Data in connection with construction.

1.7 NOT USED

QUALITY ASSURANCE SUBMITTALS

- A. Submit quality-control submittals, including design data, certifications, manufacturer's instructions, manufacturer's field reports, and other quality-control submittals as required under other Sections of the Specifications.
- B. Certifications: Where other Sections of the Specifications require certification that a product, material, or installation complies with specified requirements, submit a notarized certification from the manufacturer certifying compliance with specified requirements.
 - 1. Signature: Certification shall be signed by an officer of the manufacturer or other individual authorized to sign documents on behalf of the company.

MISCELLANEOUS SUBMITTALS:

- A. Material Safety Data Sheets: Process material safety data sheets as "product data." These are submitted for information purposes only, they will be returned with the action stamp, "Received - Not Reviewed."
- В. Inspection and Test Reports: Classify each inspection and test report as being either "shop drawings" or "product data" depending on whether the report is specially prepared for the project, or a standard publication of workmanship control testing at the point of production. Process inspection and test reports accordingly.
- C. Worker Identification and Accreditation: Provide legally recognized identification of contractor personnel Section 02 80 30 © 4/27/21 20046

Specifications 02 80 30-5

(such as valid driver's license from any of the fifty states of the United States of America or territories, or valid photographic ID from any of the fifty states of the United States of America or territories) as well as required drug screening and employee background information.

- **D. Project Photographs:** Furnish project photographs at monthly intervals. Comply with Designer's direction concerning desired vantage points for shots.
- **E. Records of Actual Work:** Furnish copies of records of actual work, one of which will be returned for inclusion in the record documents as specified in section "Project Closeout".
- **F. Standards:** Where submittal of a copy of standards is indicated, and except where copies of standards are specified as an integral part of a "Product Data" submittal, submit a single copy of standards for the Designer's use. Where workmanship, whether at the project site or elsewhere is governed by a standard, furnish additional copies of the standard to fabricators, installers and others involved in the performance of the work.
- **G. Closeout Submittals:** Refer to section "Project Closeout" and to individual sections of these specifications for specific submittal requirements of project closeout information.
- **H. Record Documents:** Furnish set of original documents as maintained on the project site. Along with original marked-up record drawings provide electronic copies of marked-up drawings

1.10 DESIGNER'S ACTION

- **A.** Except for submittals for the record or information, where action and return is required, the Designer will review each submittal, mark to indicate action taken, and return promptly.
 - 1. Compliance with specified characteristics is the Contractor's responsibility.
- **B. Action Label:** The Designer will label each submittal with a uniform, action label. The Designer will mark the label appropriately to indicate the action taken, as follows:
 - 1. Final Unrestricted Release: When the Designer marks a submittal "Approved," the Work covered by the submittal may proceed provided it complies with requirements of the Contract Documents. Final payment depends on that compliance.
 - 2. Final-But-Restricted Release: When the Designer marks a submittal "Approved as Noted," the Work covered by the submittal may proceed provided it complies with notations or corrections on the submittal and requirements of the Contract Documents. Final payment depends on that compliance.
 - 3. Returned for Resubmittal: When the Designer marks a submittal "Not Approved, Revise and Resubmit," do not proceed with Work covered by the submittal, including purchasing, fabrication, delivery, or other activity. Revise or prepare a new submittal according to the notations; resubmit without delay. Repeat if necessary to obtain different action mark.
 - a. Do not use, or allow others to use, submittals marked "Not Approved, Revise and Resubmit" at the Project Site or elsewhere where Work is in progress.
 - **4.** Received Not Reviewed: When the Designer marks a submittal "Received Not Reviewed" this acknowledges that the submittal has been received. This action applies to materials that are to be submitted for information purposes only, and where no review or action by the Designer is required.

© 4/27/21 20046 WYNN L. WHITE

Section 02 80 30

Section 02 80 30 Submittals

Specifications 02 80 30-6

- **5.** Other Action: Where a submittal is for information or record purposes or special processing or other activity, the Designer will return the submittal marked "Action Not Required."
- **C. Unsolicited Submittals:** The Designer will return unsolicited submittals to the sender without action.

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION (Not Applicable)

END OF SECTION 02 80 30

© 4/27/21 20046 WYNN L. WHITE

Section 02 80 30

Wynn L. White Consulting Engineers, Inc. (225) 761-9141

Page 6 of 6

Specifications 02 80 40-1

SECTION 02 80 40 - TEMPORARY FACILITIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 & 2 Specification Sections, apply to this Section.

1.2 SUMMARY

- **A.** This Section includes requirements for construction facilities and temporary controls, including temporary utilities, support facilities, and security and protection where required.
- **B. Temporary utilities include**, but are not limited to, the following:
 - 1. Water service and distribution.
 - 2. Temporary electric power and light.
 - **3.** Temporary heat.
 - 4. Ventilation.
 - **5.** Telephone service.
 - **5.** Sanitary facilities, including drinking water.
 - **6.** Storm and sanitary sewer.
- **C. Support facilities include**, but are not limited to, the following:
 - 1. Field offices, laboratories, and storage sheds.
 - **2.** Temporary enclosures.
 - **3.** Hoists and temporary elevator use.
- **D.** Security and protection facilities include, but are not limited to, the following:
 - **1.** Temporary fire protection.
 - 2. Barricades, warning signs, and lights.

1.3 DESCRIPTION OF REQUIREMENTS:

A. General: Provide temporary connection to existing building utilities or provide temporary facilities as required herein or as necessary to carry out the work.

1.4 SUBMITTALS

Section 02 80 40

- **A. Before the Start of Work:** Submit the following to the Designer for review. Begin no work until these submittals are returned with Designer's action stamp indicating that the submittal is returned for unrestricted use or final-but-restricted use. Only submit data on items listed below that are required for use on this project.
 - 1. Hot water heater: Submit manufacturers name, model number, size in gallons (liters), heating capacity, power requirements.
 - 2. Decontamination Unit Sub-panel: Submit product data.
 - 3. Ground Fault Circuit Interrupters (GFCI): Submit product data.
 - **4.** Lamps and Light Fixtures: Submit product data.

© 4/27/21 20046

WYNN L. WHITE
CONSULTING
FINE ENGINEERS INC.

Wynn L. White Consulting Engineers, Inc. (225) 761-9141

Specifications 02 80 40-2

- **5.** Temporary Heating Units: Provide product data.
- **6.** Temporary Cooling Units: Provide product data and installation instructions.
- **7.** Self Contained Toilet Units: Provide product data and name of sub-contractor to be used for servicing self contained toilets. Submit method to use for servicing.
- **8.** Fire Extinguishers: Provide product data. Submit schedule indicating location at job site and compliance with NFPA 10 and NFPA 241.
- **9.** Temporary Utilities: Submit reports of tests, inspections, meter readings, and similar procedures performed on temporary utilities.
- **10.** Implementation and Termination Schedule: Within 15 days of the date established for commencement of the Work, submit a schedule indicating implementation and termination of each temporary utility.

1.5 QUALITY ASSURANCE

- **A. Regulations:** Comply with industry standards and applicable laws and regulations of authorities having jurisdiction including, but not limited to, the following:
 - **1.** Building code requirements.
 - **2.** Health and safety regulations.
 - 3. Utility company regulations.
 - **4.** Police, fire department, and rescue squad rules.
 - **5.** Environmental protection regulations.
- **B.** Standards: Comply with NFPA 241 "Standard for Safeguarding Construction, Alterations, and Demolition Operations," ANSI A10 Series standards for "Safety Requirements for Construction and Demolition," and NECA Electrical Design Library "Temporary Electrical Facilities."
- **C. Electrical Service:** Comply with NEMA, NECA, and UL standards and regulations for temporary electric service. Install service in compliance with NFPA 70 "National Electric Code."
- **D. Inspections:** Arrange for authorities having jurisdiction to inspect and test each temporary utility before use. Obtain required certifications and permits.

1.6 PROJECT CONDITIONS

- **A. Temporary Utilities:** Prepare a schedule indicating dates for implementation and termination of each temporary utility. At the earliest feasible time, when acceptable to the Owner, change over from use of temporary service to use of permanent service.
- **B.** Conditions of Use: Keep temporary services and facilities clean and neat in appearance. Operate in a safe and efficient manner. Relocate temporary services and facilities as the Work progresses. Do not overload facilities or permit them to interfere with progress. Take necessary fire-prevention measures. Do not allow hazardous, dangerous, or unsanitary conditions, or public nuisances to develop or persist on-site.

PART 2 - PRODUCTS

Section 02 80 40

2.1 MATERIALS AND EQUIPMENT

A. General: Provide new materials and equipment. If acceptable to the Designer, the Contractor may use undamaged, previously used materials and equipment in serviceable condition. Provide materials and equipment suitable for use intended.

Wynn L. White Consulting Engineers, Inc. (225) 761-9141

© 4/27/21 20046



Specifications 02 80 40-3

B. Lumber and Plywood:

- **1.** For job-built temporary offices, shops, and sheds within the construction area, provide UL-labeled, fire-treated lumber and plywood for framing, sheathing, and siding.
- 2. For fences and vision barriers, provide minimum 3/8-inch- (9.5mm) thick exterior plywood.
- **C. Scaffolding:** Provide scaffolding, ladders and/or staging, etc. as necessary to accomplish the work of this contract. Scaffolding may be of suspension type or standing type such as metal tube and coupler, tubular welded frame, pole or outrigger type or cantilever type. The type, erection and use of scaffolding shall comply with applicable OSHA provisions.
 - 1. Equip rungs of metal ladders, etc. with an abrasive non-slip surface.
 - **2.** Provide a nonskid surface on scaffold surfaces subject to foot traffic.

2.2 WATER SERVICE

- **A. Water:** Provide potable water approved by local health authorities.
- B. Temporary Water Service Connection: Connections to the Owner's water system shall include backflow protection. Valves shall be temperature and pressure rated for operation of the temperatures and pressures encountered. After completion of use, connections and fittings shall be removed without damage or alteration to existing water piping and equipment. Leaking or dripping valves shall be piped to the nearest drain or located over an existing sink or grade where water will not damage existing finishes or equipment. Provide separate hoses and/or/ pumps for shower water and amended water, without the possibility of cross connection.
- **C. Water Hoses:** Provide heavy-duty, abrasion-resistant, flexible hoses in diameters and lengths necessary to adequately serve temporary facilities, and with a pressure rating greater than the maximum pressure of the water distribution system. Provide adjustable shutoff nozzles at hose discharge.
 - 1. Provide water into each work area and to each Decontamination Unit. Provide fittings as required to allow for connection to existing wall hydrants or spouts, as well as temporary water heating equipment, branch piping, showers, shut-off nozzles and equipment.
- D. Hot Water Heater: Provide UL rated minimum 40 gallon (150 liters) electric hot water heater to supply hot water for the Decontamination Unit shower. Activate from 30 amp circuit breaker located within the Decontamination Unit subpanel. Provide with relief valve compatible with water heater operation; pipe relief valve down to drip pan on floor with type L copper. Drip pans shall consist of a 12" X 12" X 6" (30 cm. X 30 cm. X 15 cm) deep pan, made of 19 gauge galvanized steel, with handles. A 3-quart (3 liter) kitchen saucepan may be substituted for this purpose. Drip pan shall be securely fastened to the hot water heater with bailing wire or similar material. Wiring of the hot water heater shall be in compliance with NEMA, NECA, and UL standards.
- **E. Hot Water:** may be secured from the building hot water system, provided backflow protection is installed at point of connection as described in this section under Temporary Water Service connection, and if authorized in writing by the Designer.

2.3 ELECTRICAL SERVICE:

A. General: Comply with applicable NEMA, NECA and UL standards and governing regulations for materials and layout of temporary electric service.

Section 02 80 40 © 4/27/21 20046 WYNN

02 80 40-4 Specifications

В. Temporary Power: Provide service to Decontamination Unit subpanel with minimum 60 amp, 2 pole circuit breaker or fused disconnect connected to the building's main distribution panel. Subpanel and disconnect shall be sized and equipped to accommodate electrical equipment required for completion of the work.

- 1. Connection to the building's main distribution panel is to be made by a licensed electrician
- C. Voltage Differences: Provide identification warning signs at power outlets which are other than 110-120 volt power. Provide polarized outlets for plug-in type outlets, to prevent insertion of 110-120 volt plugs into higher voltage outlets. Dry type transformers shall be provided where required to provide voltages necessary for work operations.
- D. Electrical Outlets: Provide properly configured, NEMA-polarized outlets to prevent insertion of 110- to 120-Volt plugs into higher voltage outlets. Provide receptacle outlets equipped with ground-fault circuit interrupters (GFCI), reset button, and pilot light for connection of power tools and equipment.
 - 1. Locate GFCI's exterior to Work Area so that circuits are protected prior to entry to Work Area. Provide circuit breaker type ground fault circuit interrupters (GFCI) equipped with test button and reset switch for circuits to be used for any purpose in work area, decontamination units, exterior, or as otherwise required by national electrical code, OSHA or other authority. Locate in panel exterior to Work Area.
- E. Electrical Power Cords: Provide grounded extension cords. Use hard-service cords where exposed to abrasion and traffic. Provide waterproof connectors to connect separate lengths of electric cords if single lengths will not reach areas where construction activities are in progress. Do not exceed safe length-voltage ratio.
- F. Lamps and Light Fixtures: Provide general service incandescent lamps or fluorescent lamps of wattage indicated or required for adequate illumination as required by the work or this section. Protect lamps with guard cages or tempered glass enclosures, where fixtures are exposed to breakage by construction operations. Provide vapor tight fixtures in work area and decontamination units. Provide exterior fixtures where fixtures are exposed to the weather or moisture.

2.4 TEMPORARY HEAT:

A. Heating Units: Provide temporary heating units that have been tested and labeled by UL, FM or another recognized trade association related to the fuel being consumed. Use steam or hot water radiant heat where available, and where not available use electric resistant fin radiation supplied from a branch circuit with ground fault circuit interrupter.

2.5 TEMPORARY COOLING:

Cooling Units: Provide temporary cooling units consisting of a fan coil unit inside the work area with a A. compressor and heat rejection coil outside.

2.6 TEMPORARY STRUCTURES

- Temporary Offices: Provide prefabricated or mobile units or similar job-built construction with lockable A. entrances, operable windows, and serviceable finishes. Provide heated and air-conditioned units on foundations adequate for normal loading.
- В. Temporary Toilet Units: Provide self-contained, single-occupant toilet units of the chemical or aerated recirculation type. Provide units properly vented and fully enclosed with a glass-fiber-reinforced polyester

© 4/27/21 20046

CONSULTING

TTT ENGINEERS, INC.

Section 02 80 40

shell or similar nonabsorbent material.

2.7 FIRST AID

A. First Aid Supplies: Comply with governing regulations and recognized recommendations within the construction industry.

2.8 FIRE EXTINGUISHERS:

- **A. Fire Extinguishers:** Provide hand-carried, portable, UL-rated, Class A fire extinguishers for temporary offices and similar spaces. In other locations, provide hand-carried, portable, UL-rated, Class ABC, drychemical extinguishers or a combination of extinguishers of NFPA-recommended classes for the exposures.
- **B.** Comply with NFPA 10 and NFPA 241 for classification, extinguishing agent, and size required by location and class of fire exposure.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- **A. General:** Use qualified personnel for installation of temporary facilities. Locate facilities where they will serve the Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required.
- **B. Provide** each facility ready for use when needed to avoid delay. Maintain and modify as required. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.
- C. Require that personnel accomplishing this work be licensed as required by local authority for the work performed.
- **D. Relocate**, modify and extend services and facilities as required during the course of work so as to accommodate the entire work of the project.

3.2 SCAFFOLDING:

- **A. During the erection and/or moving** of scaffolding, care must be exercised so that the polyethylene floor covering is not damaged.
- **B.** Clean as necessary debris from non-slip surfaces.
- **C. At the completion of abatement work** clean construction aids within the work area, wrap in one layer of 6 mil (0.15 mm) polyethylene sheet and seal before removal from the Work Area.

3.3 TEMPORARY UTILITY INSTALLATION

- **A. General:** Engage the appropriate local utility company to install temporary service or connect to existing service. Where company provides only part of the service, provide the remainder with matching, compatible materials and equipment. Comply with company recommendations.
- 1. Arrange with company and existing users for a time when service can be interrupted, if necessary, to Section 02 80 40 © 4/27/21 20046 WYNN L, WHITE

02 80 40-6 Specifications

- make connections for temporary services.
- 2. Provide adequate capacity at each stage of construction. Prior to temporary utility availability, provide trucked-in services.
- 3. Use Charges: Cost or use charges for temporary facilities are not chargeable to the Owner or Designer. Neither the Owner nor Designer will accept cost or use charges as a basis of claims for Change Orders.

В. Water Service:

- 1. Water connection (without charge) to Owner's existing potable water system is limited to one 3/4" (19 mm) pipe-size connection, and a maximum flow of 10 g.p.m. (38 liters / minute) each to hot and cold water supply. Install using vacuum breakers or other backflow preventer as required by local authority. Hot water shall be supplied at a minimum temperature of 100 degrees F (35 degrees C). Supply hot and cold water to the Decontamination Unit in accordance with Section 01563.
 - Maintain hose connections and outlet valves in leakproof condition. Where finish work below a. an outlet might be damaged by spillage or leakage, provide a drip pan of suitable size to minimize the possibility of water damage. Drain water promptly from pans as it accumulates.
- 2. Sterilization: Sterilize temporary water piping prior to use.

C. **Electrical Service:**

- 1. Lock out: Lock out all existing power to or through the work area as described below. Unless specifically noted otherwise existing power and lighting circuits to the Work Area are not to be used. All power and lighting to the Work Area and Decontamination facilities are to be provided from temporary electrical panel described below.
 - Comply with requirements to OSHA 29 CFR 1910.147 the control of hazardous energy lock a. out/tag out.
 - Lock out power to Work Area by switching off breakers serving power or lighting circuits in b. work area. Tagout breakers with notation "DANGER circuit being worked on". Lock panel and have all keys under control of authorized person who has locked pane.
 - c. Lock out power to circuits running through Work Area wherever possible by switching off and locking all breakers serving these circuits. Tag out breakers with notation "DANGER circuit being worked on". Sign and date danger tag. Lock panel and supply keys to authorized person who has applied locks. If
 - circuits cannot be shut down for any reason, label at intervals of 4-feet" (1.25 meter) on center with signs reading, "DANGER live electric circuit. Electrocution hazard." All asbestos abatement work in the vicinity of the live circuit is to be performed dry. All necessary notifications and procedures for dry removal are to be followed.
 - d. Lock out power to electrical equipment located in the work area, and to any fans or other equipment that is going to be worked on.
- 2. Temporary Electrical Panel: Provide temporary electrical panel sized and equipped to accommodate electrical equipment and lighting required by the work. Connect temporary panel to existing building electrical system. Protect with circuit breaker or fused disconnect. Locate temporary panel as directed by Owner or Designer. Panel is to be installed by a licenses electrician.
- 3. Power Distribution System: Install wiring overhead and rise vertically where least exposed to damage. Where permitted, wiring circuits not exceeding 125 Volts, ac 20 Ampere rating, and lighting circuits may be nonmetallic sheathed cable where overhead and exposed for surveillance.
- Circuit Protection: Protect each circuit with a ground fault circuit interrupter (GFCI) of proper size Section 02 80 40 © 4/27/21 20046

- located in the temporary panel. Do not use outlet type GFCI devices.
- **5.** Temporary Wiring: in the Work Area shall be type UF non-metallic sheathed cable located overhead and exposed for surveillance. Do not wire temporary lighting with plain, exposed (insulated) electrical conductors. Provide liquid tight enclosures or boxes for wiring devices.
- **6.** Number of Branch Circuits: Provide sufficient branch circuits as required by the work. Branch circuits are to originate at temporary electrical panel. At minimum provide the following:
 - a. One Circuit for each HEPA filtered fan unit
 - b. For power tools and task lighting, provide one temporary 4-gang outlet in the following locations. Provide a separate 110-120 Volt, 20 Amp circuit for each 4-gang outlet (4 outlets per circuit).
 - c. One outlet in the work area for each 2500 square feet (225 square meters) of work area
 - d. One outlet at each decontamination unit, located in equipment room
- 7. 110-120 volt 20 amp branch circuits with 4-gang outlet for Owner's exclusive use while conducting visual inspection and air sampling during the work as follows:
 - a. One in each work area
 - b. One at clean side of each Decontamination Unit.
 - c. One at each exhaust location for HEPA filtered fan units
- **8.** 110-120 volt 20 amp branch circuits with 4-gang outlet for Owner's exclusive use for conducting visual inspection and final air sampling as set forth in Section 01711 Project Decontamination as follows:
 - a. Five inside work area
 - b. Two outside work area in location designated by Designer

D. Temporary Lighting:

- 1. Lock out: Lock out existing power to lighting circuits in Work Area as described in section "Temporary Enclosures". Unless specifically noted otherwise existing lighting circuits to the Work Area are not to be used. All lighting to the Work Area and Decontamination facilities is to be provided from temporary electrical panel described above.
- **2.** Provide the following or equivalent where natural lighting or existing building lighting does not meet the required light level:
 - a. One 200-watt incandescent lamp per 1000 square feet (92.9 square meters) of floor area, uniformly distributed, for general construction lighting, or equivalent illumination of a similar nature. In corridors and similar traffic areas provide one 100-watt incandescent lamp every 50 feet (15.2 meters). In stair ways and at ladder runs, provide one lamp minimum per story, located to illuminate each landing and flight. Provide sufficient temporary lighting to ensure proper workmanship everywhere; by combined use of daylight, general lighting, and portable plug-in task lighting.
 - b. Provide lighting in areas where work is being preformed as required to supply a 100 foot candle (1,076 lumens/sq meter) minimum light level.
 - c. Provide lighting in any area being subjected to a visual inspection as required to supply a 100 foot candle (1,076 lumens/sq meter) minimum light level.
 - d. Provide lighting in the Decontamination Unit as required to supply a 50 foot candle (538 lumens/sq meter) minimum light level.
- 3. Number of Lighting Circuits: Provide sufficient lighting circuits as required by the work. Lighting Section 02 80 40 © 4/27/21 20046 WYNN L. WHITE

02 80 40-8 Specifications

- circuits are to originate at temporary electrical panel.
- 4. Circuit Protection: Protect each circuit with a ground fault circuit interrupter (GFCI) of proper size located in the temporary panel.

E. **Temporary Heat:**

- 1. General: Provide temporary heat where indicated or needed for performance of the Work.
- 2. Heating Facilities: Except where the Owner authorizes use of the permanent system, provide vented, self-contained, LP-gas or fuel-oil heaters with individual space thermostatic control.
 - a. Use of gasoline-burning space heaters, open flame, or salamander heating units is prohibited.
- 3. Maintain a minimum temperature of 70 degrees F (21 degrees C). Where finished work has been
- 4. Maintain a minimum temperature of 75 degrees F (24 degrees C).in the shower of the decontamination unit.
- 5. Maintain a minimum temperature of 65 degrees F (18 degrees C) in the Work Area at all times that work is going on. At all other times and at completion of removal work, but before start of reconstruction work, maintain a minimum temperature of 50 degrees F (10 degrees C).
- 6. Maintain a minimum temperature of 50 degrees F (10 degrees C) in the Work Area at all times during and after removal work.

F. **Temporary Cooling:**

Required Cooling: Provide units sufficient to supply 20,000 BTU/hr (5,862 w) of cooling per 8,000 1. cubic feet (225 cubic meters) of work area.

G. **Temporary Utilities**

- 1. Temporary Telephones: Provide temporary telephone service throughout the construction period for personnel engaged in construction activities. Install telephone on a separate line for each temporary office and first-aid station. Provide wireless high speed internet connection for Owner's representative, air monitoring and air sample analysis personnel, and Designer's use.
- 2. Separate Telephone Lines: Provide additional telephone lines for the following:
 - Where an office has more than 2 occupants, install a telephone for each additional occupant a. or pair of occupants.
 - b. Provide a dedicated telephone line for a fax machine in the field office.
 - Provide a separate line for the Owner's use. c.
 - d. At each telephone, post a list of emergency telephone numbers.

H. **Sanitary Facilities:**

Section 02 80 40

- 1. Sanitary facilities include temporary toilets, wash facilities, and drinking-water fixtures. Comply with regulations and health codes for the type, number, location, operation, and maintenance of fixtures and facilities. Install where facilities will best serve the Project's needs.
 - a. Provide toilet tissue, paper towels, paper cups, and similar disposable materials for each facility. Provide covered waste containers for used material.
- 2. Toilets: Use of the Owner's existing toilet facilities will not be permitted.

© 4/27/21 20046

Wynn L. White Consulting Engineers, Inc. (225) 761-9141

- 3. Toilets: Install self-contained toilet units. Shield toilets to ensure privacy. Use of pit-type privies will not be permitted.
- **4.** Provide separate facilities for male and female personnel.
- **5.** Wash Facilities: Install wash facilities supplied with potable water at convenient locations for personnel involved in handling materials that require wash-up for a healthy and sanitary condition. Dispose of drainage properly. Supply cleaning compounds appropriate for each condition.
- **6.** Drinking-Water Facilities: Provide containerized, tap-dispenser, bottled-water drinking-water units, including paper supply.
 - a. Where power is accessible, provide electric water coolers to maintain dispensed water temperature at 45 to 55 deg F (7.2 to 12.8 deg C).
- 7. Sewers and Drainage: If sewers are available, provide temporary connections to remove effluent that can be discharged lawfully. If sewers are not available or cannot be used, provide drainage ditches, dry wells, stabilization ponds, and similar facilities. If neither sewers nor drainage facilities can be lawfully used for discharge of effluent, provide containers to remove and dispose of effluent off-site in a lawful manner.
 - a. Filter out excessive amounts of soil, construction debris, chemicals, oils, and similar contaminants that might clog sewers or pollute waterways before discharge.
 - b. Maintain temporary sewers and drainage facilities in a clean, sanitary condition. Following heavy use, restore normal conditions promptly.

3.4 SUPPORT FACILITIES INSTALLATION

- **A. Locate field offices**, field laboratories, storage sheds, and other temporary construction and support facilities for easy access. Coordinate location with Owner.
 - 1. Maintain support facilities until Substantial Completion. Remove prior to Final Completion.
- **B. Provide incombustible construction** for offices, shops, and sheds located within the construction area or within 30 feet (9 m) of building lines. Comply with requirements of NFPA 241.
- **C. Field Offices and Laboratory:** Provide insulated, weather tight temporary offices of sufficient size to accommodate required personnel at the Project Site. Keep the office clean and orderly for use for small progress meetings. Furnish and equip offices as follows:
 - 1. Furnish with a desk and chairs, a 4-drawer file cabinet, plan table, plan rack, and a 6-shelf bookcase. Provide adequate work and storage space for personnel conducting Owner's Air Monitoring, including work area for air sample preparation and analysis.
 - **2.** Equip with a water cooler and private toilet complete with water closet, lavatory, and medicine cabinet unit with a mirror.
- **C. Storage and Fabrication Sheds:** Install storage and fabrication sheds sized, furnished, and equipped to accommodate materials and equipment involved, including temporary utility service. Sheds may be open shelters or fully enclosed spaces within the building or elsewhere on-site.
- **D. Temporary Enclosures:** Provide temporary enclosures for protection of construction, in progress and completed, from exposure, foul weather, other construction operations, and similar activities.
- 1. Where heat is needed and the permanent building enclosure is not complete, provide temporary Section 02 80 40 ©4/27/21 20046 WYNN L, WHITE

- enclosures where there is no other provision for containment of heat. Coordinate enclosure with ventilating and material drying or curing requirements to avoid dangerous conditions and effects.
- 2. Install tarpaulins securely, with incombustible wood framing and other materials. Close openings of 25 sq. ft. (2.3 sq. m) or less with plywood or similar materials.
- 3. Close openings through floor or roof decks and horizontal surfaces with load-bearing, wood-framed construction.
- **4.** Where temporary wood or plywood enclosure exceeds 100 sq. ft. (9.2 sq. m) in area, use ULlabeled, fire-retardant-treated material for framing and main sheathing.
- **E. Temporary Lifts and Hoists:** Provide facilities for hoisting materials and employees. Truck cranes and similar devices used for hoisting materials are considered "tools and equipment" and not temporary facilities.

3.5 FIRE PROTECTION FACILITIES INSTALLATION

- **A. Except for use of permanent fire protection** as soon as available, do not change over from use of temporary security and protection facilities to permanent facilities until Substantial Completion, or longer, as requested by the Designer.
- **B. Temporary Fire Protection**: Until fire-protection needs are supplied by permanent facilities, install and maintain temporary fire-protection facilities of the types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 10 "Standard for Portable Fire Extinguishers" and NFPA 241 "Standard for Safeguarding Construction, Alterations, and Demolition Operations."
 - 1. Locate fire extinguishers where convenient and effective for their intended purpose, but not less than one extinguisher on each floor at or near each usable stairwell.
 - 2. Store combustible materials in containers in fire-safe locations.
 - **3.** Maintain unobstructed access to fire extinguishers, fire hydrants, temporary fire-protection facilities, stairways, and other access routes for fighting fires.
 - 4. Prohibit smoking within any building, structure, other enclosures or in hazardous fire-exposure areas.
 - **5.** Prohibit smoking in hazardous fire-exposure areas.
 - **6.** Provide supervision of welding operations, combustion-type temporary heating units, and similar sources of fire ignition.
- **C. Permanent Fire Protection**: At the earliest feasible date in each area of the Project, complete installation of the permanent fire-protection facility, including connected services, and place into operation and use. Instruct key personnel on use of facilities.
- D. Barricades, Warning Signs, and Lights: Comply with standards and code requirements for erection of structurally adequate barricades. Paint with appropriate colors, graphics, and warning signs to inform personnel and the public of the hazard being protected against. Where appropriate and needed, provide lighting, including flashing red or amber lights.

Temporary Fencing: Chain-Link Fencing: Minimum 2-inch (50-mm), 0.148-inch-(3.76-mm-) thick, galvanized steel, chain-link fabric fencing; minimum 6 feet (1.8 m) high with galvanized steel pipe posts; minimum 2-3/8-inch- (60-mm-) OD line posts and 2-7/8-inch- (73-mm-) OD corner and pull posts, with 1-5/8-inch- (42-mm-) OD top rails.

E. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction in ways and by methods that comply with environmental regulations, and minimize the possibility that air, waterways, and subsoil might be contaminated or polluted or that other undesirable effects might result. Avoid use of tools and equipment that produce harmful noise. Restrict use of noise-making tools and equipment to hours that will minimize complaints from persons or firms near the site.

Section 02 80 40 © 4/27/21 20046 WYNN L, Wh

02 80 40-11 Specifications

3.6 OPERATION, TERMINATION, AND REMOVAL

- A. Supervision: Enforce strict discipline in use of temporary facilities. Limit availability of temporary facilities to essential and intended uses to minimize waste and abuse.
- В. Maintenance: Maintain facilities in good operating condition until removal. Protect from damage by freezing temperatures and similar elements.
 - 1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.
 - 2. Protection: Prevent water-filled piping from freezing. Maintain markers for underground lines. Protect from damage during excavation operations.
- C. Termination and Removal: Unless the Designer requests that it be maintained longer, remove each temporary facility when the need has ended, when replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with the temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.
 - 1. Materials and facilities that constitute temporary facilities are the Contractor's property. The Owner reserves the right to take possession of project identification signs.

END OF SECTION 02 80 40

© 4/27/21 20046 Page 11 of 11

Section 02 80 40

Wynn L. White Consulting Engineers, Inc. (225) 761-9141

SECTION 02 80 41 - TEMPORARY PRESSURE DIFFERENTIAL AND AIR CIRCULATION SYSTEM

PART 1 - GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division-2 Specification Sections, apply to work of this section.

1.2 RELATED SECTIONS

A. Heating and cooling requirements are set forth in Section "Temporary Facilities - Asbestos Abatement".

1.3 MONITORING

A. Continuously monitor and record the pressure differential between the Work Area and the building/areas outside of each Work Area with a monitoring device incorporating a continuous recorder (e.g. strip chart).

1.4 SUBMITTALS

- A. Before Start of Work: Submit design of pressure differential system to the Designer for review. Do not begin work until submittal is returned with the Designer's action stamp indicating that the submittal is returned for unrestricted use. Include in the submittal at a minimum:
 - 1. Number of HEPA filtered fan units required and the calculations necessary to determine the number of machines
 - 2. Description of projected air flow within Work Area and methods required to provide adequate air flow in all portions of the work area
 - 3. Anticipated pressure differential across Work Area enclosures
 - **4.** Description of methods of testing for correct air flow and pressure differentials
 - 5. Manufacturer's product data on the HEPA filtered fan units to be used
 - 6. Location of the machines in the Work Area
 - **7.** Method of supplying adequate power to the machines and designation of building electrical panel(s) which will be supplying the power.
 - 8. Description of work practices to insure that airborne fibers travel away from workers
 - **9.** Manufacturer's product data on equipment used to monitor pressure differential between inside and outside of Work Area.
 - **10.** Manufacturer's product data on auxiliary generator to be used
 - 11. Manufacturer's product data on auxiliary power switch to be used
 - 12. Schematic diagram of power and auxiliary power supply to HEPA filtered fan units
- **B.** On a weekly basis: Submit printout from pressure differential monitoring equipment. Mark printout with date and start of time for each day. Use printout paper that indicates elapsed time in intervals no greater than hours. Indicate on each day's record times of starting and stopping abatement work, type of work in progress, breaks for lunch or other purposes, periods of stop work, and filter changes. Cut printout into segments by day, attach to 8 ½" by 11" paper. Label with project name, contractors name and date.

1.5 QUALITY ASSURANCE:

A. Monitor pressure differential at Personnel and Equipment Decontamination Units with a differential pressure meter equipped with a continuous recorder. Meter shall be equipped with a warning buzzer which will sound if pressure differential drops below 0.02 inch [0.5 mm] of water.

Section 02 80 41 © 4/27/21 20046 WYNN L. WHIT

PART 2 - PRODUCTS

2.1 HEPA FILTERED FAN UNITS:

- **A. General:** Supply the required number of HEPA filtered fan units to the site in accordance with these specifications. Use units that meet the following requirements.
- **B.** Cabinet: Constructed of durable materials able to withstand damage from rough handling and transportation. The width of the cabinet should be less than 30 inches [0.76 meters] to fit through standard-size doorways. Provide units whose cabinets are:
 - Factory-sealed to prevent asbestos-containing dust from being released during use, transport, or maintenance
 - 2. Arranged to provide access to and replacement of all air filters from intake end
 - 3. Mounted on casters or wheels
- C. Fans: Rate capacity of fan according to usable air-moving capacity under actual operating conditions.
- **D. HEPA Filters:** Provide units whose final filter is the HEPA type with the filter media (folded into closely pleated panels) completely sealed on all edges with a structurally rigid frame.
 - 1. Provide units with a continuous rubber gasket located between the filter and the filter housing to form a tight seal.
 - 2. Provide HEPA filters that are individually tested and certified by the manufacturer to have an efficiency of not less than 99.97 percent when challenged with 0.3 um dioctylphthalate (DOP) particles when tested in accordance with Military Standard Number 282 and Army Instruction Manual 136-300-175A. Provide filters that bear a UL586 label to indicate ability to perform under specified conditions.
 - **3.** Provide filters that are marked with: the name of the manufacturer, serial number, air flow rating, efficiency and resistance, and the direction of test air flow.
 - **4.** Pre-filters, which protect the final filter by removing the larger particles, are required to prolong the operating life of the HEPA filter. Two stages of pre-filtration are required. Provide units with the following pre-filters:
 - a. First-stage pre-filter: low-efficiency type (e.g., for particles 100 um and larger)
 - b. Second-stage (or intermediate) filter: medium efficiency (eg., effective for particles down to 5 um)
 - c. Provide units with pre-filters and intermediate filters installed either on or in the intake grid of the unit and held in place with special housings or clamps.
- **E. Instrumentation:** Provide units equipped with:
 - 1. Magnehelic gauge or manometer to measure the pressure drop across filters and indicate when filters have become loaded and need to be changed
 - 2. A table indicating the usable air-handling capacity for various static pressure readings on the Magnehelic gauge affixed near the gauge for reference, or the Magnehelic reading indicating at what point the filters should be changed, noting Cubic Feet per Minute (CFM) (Liters / Second (LPS)) air delivery at that point
 - 3. Elapsed time meter to show the total accumulated hours of operation

© 4/27/21 20046

Section 02 80 41



- F. Safety and Warning Devices: Provide units with the following safety and warning devices:
 - 1. Electrical (or mechanical) lockout to prevent fan from operating without a HEPA filter
 - 2. Automatic shutdown system to stop fan in the event of a rupture in the HEPA filter or blocked air discharge
 - 3. Warning lights to indicate normal operation (green), too high a pressure drop across the filters (i.e., filter overloading) (yellow), and too low of a pressure drop (i.e., rupture in HEPA filter or obstructed discharge) (red)
 - 4. Audible alarm if unit shuts down due to operation of safety systems
- G. Electrical components: Provide units with electrical components approved by the National Electrical Manufacturers Association (NEMA) and Underwriter's Laboratories (UL). Each unit is to be equipped with overload protection sized for the equipment. The motor, fan, fan housing, and cabinet are to be grounded.
- H. Manufacturers: Subject to compliance with requirements, manufacturers offering products which may be incorporated in the work include, but are not limited to, the following:
- I. Manufacturer: Subject to compliance with requirements, provide products of the following or equal:
 - 1. **HEPA filtered Fan Units:**

Aerospace America, Inc. www.aerospaceamerica.com

Abatement Technologies www.abatement.com

2. Hazardous Locations: The following manufacturer provides pneumatically powered machines for use in asbestos abatement jobs in hazardous locations where electric motors are prohibited.

Abatement Technologies www.abatement.com

- 2.2 NOT USED
- 2.3 NOT USED

PART 3 - EXECUTION

3.1 PRESSURE DIFFERENTIAL ISOLATION

- A. Isolate the Work Area from all adjacent areas or systems of the building with a Pressure Differential that will cause a movement of air from outside to inside at any breach in the physical isolation of the Work Area.
- В. Relative Pressure in Work Area: Continuously maintain the work area at an air pressure that is lower than that in any surrounding space in the building, or at any location in the immediate proximity outside of the building envelope. This pressure differential when measured across any physical or critical barrier must equal or exceed a static pressure of: 0.02 inches (0.5 mm) of water.
- C. Accomplish the pressure differential by exhausting a sufficient number of HEPA filtered fan units from Section 02 80 41 © 4/27/21 20046

Specifications 02 80 41-4

the work area. The number of units required will depend on machine characteristics, the seal at barriers, and required air circulation. The number of units will increase with increased make-up air or leaks into the Work Area. Determine the number of units required for pressure isolation by the following procedure:

- 1. Establish required air circulation in the work area, personnel and equipment decontamination units.
- 2. Establish isolation by increased pressure in adjacent areas or as part of seals where required.
- 3. Exhaust a sufficient number of units from the work area to develop the required pressure differential.
- **4.** The required number of units is the number determined above plus one additional unit.
- 5. Vent HEPA filtered fan units to outside of building unless authorized in writing by Designer.
- **6.** Vent each HEPA filtered fan unit to inlet of second unit. Vent second unit to a controlled area in the building. Insure that controlled area is isolated from balance of building by critical barriers at all times that units are in operation.
- **7.** Mount units to exhaust directly or through disposable ductwork.
- 8. Use only new ductwork except for sheet metal connections and elbows.
- 9. Use ductwork and fittings of same diameter or larger than discharge connection on fan unit.
- **10.** Use inflatable, disposable plastic ductwork in lengths not greater than 100 feet (30 meters).
- 11. Use spiral wire-reinforced flex duct in lengths not greater than 50 feet (15 meters).
- **12.** Arrange exhaust as required to inflate duct to a rigidity sufficient to prevent flapping.
- **13.** If direction of discharge from fan unit is not aligned with duct use sheet metal elbow to change direction. Use six feet (2 meters) of spiral wire reinforced flex duct after direction change.
- **D. Isolation of elevators, stair towers, and return air intakes:** Erect seals with an air space at doors to elevators and stair towers. Pressurize this space with HEPA-filtered air so that it is at a pressure greater than either the Work Area elevator shaft or stair tower.
 - 1. Fabricate seal by first sealing door with duct tape and 6 mil polyethylene. Construct a barrier from ½" (13 mm) gypsum board supported by 3-5/8" (92 mm) x 25 gauge metal studs at 16" (410 mm) on centers. Space face of barrier a minimum of 3" (76 mm) from face of door. Seal barrier with 6 mil (0.15 mm) sheet plastic and duct tape.
 - 2. Fabricate seal by first sealing door with duct tape and 6 mil (0.15 mm) polyethylene. Construct a barrier from ½" (13mm) CDX plywood supported by 2" X 4" (51 mm x 102 mm) wood studs at 16" (410 mm) on centers. Space face of barrier a minimum of 3" (76 mm) from face of door. Seal barrier with 6 mil (0.15 mm) sheet plastic and duct tape.
 - **3.** Use plywood and framing lumber that is treated to be fire resistant.
 - **4.** Pressurize space with exhaust from HEPA filtered fan unit. Continuously maintain a pressure differential with this space a minimum of 0.02 inches (0.5 mm) of water higher in static pressure than any adjacent space.

Section 02 80 41 © 4/27/21 20046 WYNN L, WHITE

Specifications 02 80 41-5

- 5. Locate HEPA filtered fan unit outside of work area. Fabricate a manifold as required to distribute air to individual spaces to be isolated. Provide relief venting at unit as required to prevent shut down due to low air flow while still maintaining required air pressure.
- **E. Isolation of chases and enclosed stairs:** Pressurize chases and enclosed stairs with HEPA filtered air so that it is at a pressure greater than any adjacent work area.
 - 1. Pressurize space with exhaust from HEPA filtered fan unit. Continuously maintain a pressure differential with this space a minimum of 0.02 (.5 mm) inches of water higher in static pressure than any adjacent work area.
- **F. Isolation of chases and enclosed stairs:** Pressurize chases and enclosed stairs so that they are at a pressure greater than any adjacent work area.
 - 1. Pressurize space with centrifugal-type fans. Axial type fans are not to be used for this purpose. Continuously maintain a pressure differential in this space a minimum of 0.02 inches (0.5 mm) of water higher in static pressure than any adjacent work area.
- **G. Isolation of return air ductwork:** Return air duct work which must be kept operating is located in the Work Area. This duct work is to be isolated from the Work Area by an enclosure forming an annular space around the duct which is positively pressurized with HEPA filtered air.
 - 1. Wrap the duct with 6 mil (0.15 mm) polyethylene. Seal all polyethylene seams with spray glue and duct tape.
 - 2. Enclose wrapped duct with two layers of polyethylene. Fabricate inner layer from 6 mil (0.15 mm) polyethylene with all seams sealed with spray glue and duct tape. Arrange outer layer to support inner layer. Fabricate out of reinforced sheet plastic with seams sealed with spray glue and duct tape and reinforced with staples. Support outer layer with a frame work fabricated from 2" x 4"s (51 mm x 102 mm) at 24" (610 mm) on center. Enclosures less than 2'-6' in diameter may be reinforced with box strapping in lieu of wood framing.

3.2 NOT USED

3.3 AIR CIRCULATION IN THE WORK AREA:

- A. Air Circulation: For purposes of this section air circulation refers to either the introduction of outside air to the Work Area or the circulation and cleaning of air within the Work Area. Maintain the Work Area and all adjacent areas or systems of the Work Area with a Pressure Differential as specified in this section that will cause a movement of outside work area to inside work area. Contractor shall continuously monitor and record the pressure differential between the Work Area and the building outside of the Work Area with a monitoring device incorporating a continuous recorder (e.g. strip chart).
- **B.** Air circulation in the Work Area is a minimum requirement intended to help maintain airborne fiber counts at a level that does not significantly challenge the work area isolation measures. The Contractor may also use this air circulation as part of the engineering controls in the worker protection program.
- C. Determining the Air circulation Requirements: The air flow volume (cubic meters per minute) exhausted (removed) from the workplace must exceed the amount of makeup air supplied to the enclosure. Provide a fully operational air circulation system supplying a minimum of the following air circulation rate: 4 air changes per hour

Section 02 80 41 © 4/27/21 20046 WYNN L. WHILE

Specifications 02 80 41-6

- D. Determine Number of Units needed to achieve required air circulation according to the following procedure:
 - 1. Determine the volume in cubic feet of the work area by multiplying floor area by ceiling height. Determine total air circulation requirement in cubic feet per minute (CFM) for the work area by dividing this volume by 60 and multiplying by the air change rate.
 - 2. Air Circulation Required in Cubic Feet of Air per Minute (CFM) =

 Volume of work area (cu. ft.)

 Number of air changes per hour

 (60 (minutes per hour)
 - 3. Divide the air circulation requirement (CFM) above by capacity of HEPA filtered fan unit(s) used. Capacity of a unit for purposes of this section is the capacity in cubic feet per minute with fully loaded filters (pressure differential which causes loaded filter warning light to come on) in the machine's labeled operating characteristics.
 - 4. Number of Units Needed =

Air circulation Requirement (CFM)

Capacity of Unit with Loaded Filters (CFM)

5. Add one (1) additional unit as a backup in case of equipment failure or machine shutdown for filter changing.

3.4 EXHAUST SYSTEM:

- **A. Pressure differential isolation and air circulation** and pressure differential in the Work Area are to be accomplished by an exhaust system as described below.
 - 1. Exhaust all units from the Work Area to meet air circulation requirement of this section.
 - 2. Location of HEPA Filtered Fan Units: Locate fan unit(s) so that makeup air enters work area primarily through decontamination facilities and traverses Work Area as much as possible. This may be accomplished by positioning the HEPA filtered fan unit(s) at a maximum distance from the worker access opening or other makeup air sources.
 - 3. The end of the unit or its exhaust duct should be placed through an opening in the plastic barrier or wall covering. Seal plastic around the unit or duct with tape.
 - **4.** Vent to Outside of Building, unless authorized in writing by the Designer.
 - **5.** Air Handling Unit Exhaust: The exhaust plume from air handling units should be located away from adjacent personnel and intakes for HVAC systems.
 - **6.** Decontamination Units: Arrange Work Area and decontamination units so that the majority of make up air comes through the Decontamination Units. Use only personnel or equipment Decontamination Unit at any time and seal the other so that make up air passes through unit in use.
 - 7. Supplemental Makeup Air Inlets: Provide where required for proper air flow through the Work Area in location approved by the Designer by making openings in the plastic sheeting that allow air from outside the building into the Work Area. Locate auxiliary makeup air inlets as far as possible from the fan unit(s) (e.g., on an opposite wall), off the floor (preferably near the ceiling), and away from barriers that separate the Work Area from occupied clean areas. Cover with flaps to reseal

Section 02 80 41 © 4/27/21 20046 WYNN L. WHIT

Specifications 02 80 41-7

automatically if the pressure differential system should shut down for any reason. Spray flap and around opening with spray adhesive so that if flap closes meeting surfaces are both covered with adhesive. Use adhesive that forms contact bond when dry.

3.5 RECIRCULATION SYSTEM:

- **A.** Pressure differential isolation and air circulation in the Work Area are to be accomplished by a recirculation system as described below.
 - 1. Re-circulate air in the Work Area through HEPA filtered fan units to accomplish air circulation requirements of this section.
 - 2. Location of Fan Units: Locate HEPA filtered fan units so that air is circulated through all parts of the Work Area, and so that required pressure is maintained at all parts of Work Area geometry. Move units as necessary, so that in any location where asbestos-containing materials are being disturbed, air movement is directed away from employees, and toward the HEPA filter fan unit. Direct air flow in these locations so that it is predominantly toward workers' backs at the breathing zone elevation.

3.6 AIR CIRCULATION IN DECONTAMINATION UNITS:

- **A. Pressure Differential Isolation:** Continuously maintain the pressure differential required for the work area in the:
 - 1. Personnel Decontamination Unit: across the Shower Room with the Equipment Room at a lower pressure than the Clean room.
 - 2. Equipment Decontamination Unit: Across the Holding Room with the Wash Room at a lower pressure than the Clean Room.
- **B. Air Circulation:** Continuously maintain air circulation in Decontamination Units at same level as required for Work Area.
- **C. Air Movement:** Arrange air circulation through the Personnel Decontamination Unit so that it produces a movement of air from the Clean Room through the Shower Room into the Equipment Room. At each opening, the air flow velocity must be sufficient to provide visible indications of air movement into the work area.. The velocity of air flow within the enclosure must be adequate to remove airborne contamination from each worker's breathing zone without disturbing the asbestos-containing material on surfaces.

3.7 USE OF THE PRESSURE DIFFERENTIAL AND AIR CIRCULATION SYSTEM:

- **A. General:** Each unit shall be serviced by a dedicated minimum 115V-20A circuit with ground fault circuit interrupter (GFCI) supplied from temporary power supply installed under requirements of Section "Temporary Facilities." Do not use existing branch circuits to power fan units.
- **B.** Air Flow Tests: Air flow patterns will be checked before removal operations begin, at least once per operating shift and any time there is a question regarding the integrity of the enclosure. The primary test for air flow is to trace air currents with smoke tubes or other visual methods. Flow checks are made at each opening and at each doorway to demonstrate that air is being drawn into the enclosure and at each worker's position to show that air is being drawn away from the workers location and toward the HEPA filtration unit.
- **C. Demonstrate Condition of Equipment** for each HEPA filtered fan unit and pressure differential monitoring equipment including proper operation of the following:

Section 02 80 41 © 4/27/21 20046 WYNN L. WHI

- 1. Squareness of HEPA Filter
- 2. Condition of Seals
- 3. Proper operation of all lights
- 4. Proper operation of automatic shut down if exhaust is blocked
- 5. Proper operation of alarms
- 6. Proper operation of Magnehelic gauge
- 7. Proper operation and calibration on pressure monitoring equipment
- D. Demonstrate Operation of the pressure differential system to the Designer will include, but not be limited to, the following:
 - 1. Plastic barriers and sheeting move lightly in toward Work Area,
 - 2. Curtain of decontamination units move lightly in toward Work Area,
 - 3. There is a noticeable movement of air through the Decontamination Unit.
 - 4. Use smoke tube to demonstrate air movement from Clean Room through Shower Room to Equipment Room.
 - 5. Use smoke tubes to demonstrate a definite motion of air across all areas in which work is to be performed.
 - 6. Use a differential pressure meter or manometer to demonstrate the required pressure differential at every barrier separating the Work Area from the balance of the building, equipment, ductwork or outside.
 - 7. Modify the Pressure Differential System as necessary to demonstrate successfully the above.

E. **Use of System during Abatement Operations:**

- 1. Start fan units before beginning work (before any asbestos-containing material is disturbed). After abatement work has begun, run units continuously to maintain a constant pressure differential and air circulation until decontamination of the work area is complete. Do not turn off units at the end of the work shift or when abatement operations temporarily stop.
- 2. Monitoring Pressure Within the Enclosure: After the initial air flow patterns have been checked, the static pressure must be monitored within the enclosure. Monitoring may be made using manometers, pressure gauges, or combinations of these devices. It is recommended that they be attached to alarms and strip chart recorders.
- 3. Do not shut down air pressure differential system during encapsulating procedures, unless authorized by the Designer in writing. Supply sufficient pre-filters to allow frequent changes.
- Start abatement work at a location farthest from the fan units and proceed toward them. If an electric Section 02 80 41 © 4/27/21 20046

Specifications 02 80 41-9

- power failure occurs, immediately stop all abatement work and do not resume until power is restored and fan units are operating again.
- **5.** Corrective Actions: If the manometers or pressure gauges demonstrate a reduction in pressure differential below the required level, work should cease and the reason for the change investigated and appropriate changes made. The air flow patterns should be retested before work begins again.
- **6.** At completion of abatement work, allow fan units to run as specified under section "Project Decontamination", to remove airborne fibers that may have been generated during abatement work and cleanup and to purge the Work Area with clean makeup air. The units may be required to run for a longer time after decontamination, if dry or only partially wetted asbestos material was encountered during any abatement work.

F. Dismantling the System:

When a final inspection and the results of final air tests indicate that the area has been decontaminated, fan units may be removed from the Work Area. Before removal from the Work Area, remove and properly dispose of pre-filter, decontaminate exterior of machine and seal intake to the machine with 6 mil (0.15 mm) polyethylene to prevent environmental contamination from the filters.

END OF SECTION - 02 80 41

© 4/27/21 20046 WYNN L, WHITE

Section 02 80 41

Wynn L. White Consulting Engineers, Inc. (225) 761-9141

SECTION 02 80 42 - TEMPORARY ENCLOSURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 2 Specification Sections, apply to work of this section.

1.2 SUBMITTALS:

- Before Start of Work submit the following to the Designer for review. Do not begin work until these A. submittals are returned with the Designer's action stamp indicating that the submittal is returned for unrestricted use.
 - 1. Strippable Coatings: Submit following:
 - Product description including major components and solvents. a.
 - b. Test report on ASTM E84 test of surface burning characteristics.
 - c. Manufacturer's installation instructions. Indicate portions applicable to the project and selected assemblies where the manufacturer offers alternatives.
 - 2. Spray Cement: Submit following:
 - a. Product description including major components and solvents.
 - b. Manufacturer's installation instructions. Indicate portions applicable to the project.
 - 3. Sheet Plastic: For fire retardant plastic submit test reports on NFPA 701 test.
 - 4. Signs: Submit samples of signs to be used.
- В. Before Start of Work submit the following to the Designer for review. Do not begin work until these submittals are returned with the Designer's action stamp indicating that the submittal has been' "Received -Not Reviewed."
 - 1. Material Safety Data Sheet: Submit Material Safety Data Sheets, or equivalent, in accordance with the OSHA Hazard Communication Standard (29 CFR 1910.1200) for the following:
 - Strippable Coating.
 - Spray Cement. b.

PART 2 - PRODUCTS

2.1 SHEET PLASTIC:

Section 02 80 42

- A. Polyethylene Sheet: A single polyethylene film in the largest sheet size possible to minimize seams, 6.0 mil (0.15 mm) thick, clear, frosted, or black as indicated.
- В. Polyethylene Sheet: Provide flame-resistant polyethylene film that conforms to requirements set forth by the National Fire Protection Association Standard 701, Small Scale Fire Test for Flame-Resistant Textiles and Films. Provide largest size possible to minimize seams, 6.0 mil (0.15 mm) thick frosted or black as indicated.
- C. Reinforced Polyethylene Sheet: Where plastic sheet constitutes the only barrier between the work area and the building exterior, provide translucent, nylon reinforced or woven polyethylene, laminated, flameresistant, polyethylene film that conforms to requirements set forth by the National Fire Protection

© 4/27/21 20046 CONSULTING Page 1 of 13 F ENGINEERS, INC.

Association Standard 701, Small Scale Fire Test for Flame-resistant Textiles and Films. Provide largest size possible to minimize seams, 6.0 mil (0.15 mm) thick, frosted or black as indicated.

2.2 STRIPPABLE COATINGS:

- **A. Strippable Coatings:** Provide strippable coatings in aerosol cans or premixed for spray application formulated to adhere gently to surfaces and remove cleanly by peeling off at the completion of the work.
 - 1. Provide only water-based latex materials.
 - 2. Provide materials manufactured for the specific application required.
- **B. Wall coating:** designed to be easy to remove.
- C. Floor coating: designed to provide a tough film which resists spread of water beneath plastic layer.
- **D. Window coating:** recommended by the manufacturer for use on windows. Supply materials that are designed to be stable on glass in sunlight and resist the transmission of ultraviolet radiation.
- **E. Fire Safety:** Provide materials that meet the following requirements:
 - 1. When wet or while being installed:
 - a. Do not create combustible vapors
 - b. Have no flash point
 - c. Are not noxious
 - d. Department of Transportation category of non-flammable.
 - 2. When dry, material must have a Class A rating as a building material and meet the following requirements when tested in accordance with ASTM E-84:
 - a. Flame Spread no greater than 20
 - b. Fuel Contributed 0
 - c. Smoke Developed no more than 110
- **F. Deliver materials** to the job site in unopened, factory-labeled containers.
- **G. Available Manufacturers:** Subject to compliance with requirements, manufacturers offering products which may be incorporated in the work include, but are not limited to, the following:
- H. Manufacturer: Subject to compliance with requirements, provide products of one of the following:
 - Isotek Corporation Spray Poly P.O. Box 29799 New Orleans, LA 70189-0799 (504)367-9856
 - 2. H.B. Fuller Co. Spray Poly 3900 Jackson St., NE Part no. 3256 Minneapolis, MN 55421 (800) 328-4594

2.3 MISCELLANEOUS MATERIALS:

A. Duct Tape: Provide duct tape in 2 inch or 3 inch (50 mm or 75 mm) widths as indicated, with an adhesive Section 02 80 42

© 4/27/21 20046 WYNN L, WHITE



02 80 42-3 Specifications

which is formulated to stick aggressively to sheet polyethylene.

В. Spray Cement: Provide spray adhesive in aerosol cans which is specifically formulated to stick tenaciously to sheet polyethylene.

PART 3 - EXECUTION

3.1 SEQUENCE OF WORK:

- Α. Carry out work of this section sequentially. Complete each of the following activities in accordance with requirements before proceeding to the next.
 - 1. Provide emergency exits and emergency lighting.
 - 2. Control access
 - 3. Provide respiratory and worker protection.
 - 4. Provide Critical Barriers.
 - 5. Prepare Area.
 - 6. Provide Primary Barriers.
 - 7. Provide Isolation Areas as required.
 - 8. Provide Secondary Barrier.

3.2 GENERAL:

- A. Work Area: the location where asbestos abatement work occurs. The Work Area is a variable of the extent of work of the Contract. It may be a portion of a room, a single room, or a complex of rooms. A "Work Area" is considered contaminated during the work, and must be isolated from the balance of the building, and decontaminated at the completion of the asbestos control work.
- В. Completely isolate the Work Area from other parts of the building so as to prevent asbestos-containing dust or debris from passing beyond the isolated area. Should the area beyond the Work Area(s) become contaminated with asbestos-containing dust or debris as a consequence of the work, clean those areas in accordance with the procedures indicated in Section "Project Decontamination". Perform all such required cleaning or decontamination at no additional cost to owner.
- C. Construct enclosures to provide an air-tight seal around ducts and openings into existing ventilation systems and around penetrations for electrical conduits, telephone wires, water lines, drain pipes, etc. Construct enclosures to be both airtight and watertight except for those openings designed to provide entry and/or air flow control.
- D. Size: Construct enclosure with sufficient volume to encompass all of the working surfaces yet allow unencumbered movement by the worker(s), provide unrestricted air flow past the worker(s), and ensure walking surfaces can be kept free of tripping hazards.
- E. **Shape:** The enclosure may be any shape that optimizes the flow of ventilation air past the worker(s).
- F. Structural Integrity: The walls, ceilings and floors must be supported in such a manner that portions of the enclosure will not fall down during normal use.
- G. Barrier Supports: Provide frames as necessary to support all unsupported spans of sheeting.
- Н. Openings: It is not necessary that the structure be airtight; openings may be designed to direct air flow. Such openings are to be located at a distance from active removal operations. They are to be designed to

© 4/27/21 20046 CONSULTING

F ENGINEERS, INC.

draw air into the enclosure under all anticipated circumstances. In the event that negative pressure is lost, they are to be fitted with either HEPA filters to trap dust or automatic trap doors that prevent dust from escaping the enclosure. Openings for exits are to be controlled by an airlock or a vestibule.

- I. Place all tools, scaffolding, staging, etc. necessary for the work in the area to be isolated prior to completion of Work Area isolation.
- J. Areas Within an Enclosure: Each enclosure consists of a work area, a decontamination area, and waste storage area. The work area where the asbestos removal operations occur are to be separated from both the waste storage area and the contamination control area by physical curtains, doors, and/or airflow patterns that force any airborne contamination back into the work area. Unless infeasible, the Contractor shall construct each building's containment system to enclose all of the building's respective asbestos abatement work that requires Work of This Section.
- Removing Mobile Objects: Clean movable objects and remove them from the work area before an K. enclosure is constructed unless moving the objects creates a hazard. Mobile objects will be assumed to be asbestos contaminated and are to be either cleaned with amended water and a HEPA vacuum and then removed from the area or wrapped and then disposed of as asbestos-contaminated waste.
- L. Disabling HVAC Systems: The power to the heating, ventilation, and air conditioning systems that service the regulated area must be deactivated and locked out. All ducts, grills, access ports, windows and vents must be sealed off with two layers of plastic to prevent entrainment of contaminated air.
- М. Operating HVAC Systems in the regulated Area: If components of a HVAC system located in the regulated area are connected to a system that will service another zone during the project, the portion of the duct in the regulated area must be sealed and pressurized. Necessary precautions include caulking the duct joints, covering all cracks and openings with two layers of sheeting, and pressurizing the duct throughout the duration of the project by restricting the return air flow. The power to the fan supplying the positive pressure should be locked "on" to prevent pressure loss.
 - 1. If fan providing positive pressure fails for any reason, immediately stop asbestos removal work, mist the area to reduce airborne fiber levels. Notify the Project Administrator. Do not re-start asbestos removal work until authorized by the Designer.
- N. Lockout power to Work Area by switching off all breakers serving power or lighting circuits in work area. A lock and tag shall be placed on each breaker used to de-energize circuits and equipment with notation "DANGER circuit being worked on". Lock panel and have all keys under control of authorized person who has applied the locks.
- Ο. Lockout power to circuits running through work area wherever possible by switching off all breakers or removing fuses serving these circuits. Label breakers with tape over breaker with notation "DANGER circuit being worked on". Lock panel and have all keys under control of authorized person who applied locks. If circuits cannot be shut down for any reason, label at intervals 4 feet (1.22 m) on center with signs reading, "DANGER live electric circuit. Electrocution hazard." Label circuits in hidden locations but which may be affected by the work in a similar manner.
- P. Inspection Windows: Install inspection windows in locations shown on the plans or as directed by the Designer. Each inspection window is to have a 24 inch X 24 inch (610 X 610 mm) viewing area fabricated from 1/4 inch (6.35 mm) acrylic or polycarbonate sheet. Install window with top at 6 feet-6 inches (1.98 m) above floor height in a manner that provides unobstructed vision from outside to inside of the Work Area. Protect window from damage from scratching, dirt or any coatings used during the work. A sufficient number of windows are to be installed to provide observation of all portions of the Work Area that can be made visible from adjacent areas. Inspection windows that open into uncontrolled area are to be covered

Section 02 80 42 © 4/27/21 20046

with a removable plywood hatch secured by lock and key. Provide keys to Designer for all such locks.

3.3 EMERGENCY EXITS:

- A. Provide emergency exits and emergency lighting as set forth below:
 - 1. Emergency Exits: At each existing exit door from the Work Area provide the following means for emergency exiting:
 - 2. Arrange exit door so that it is secure from outside the Work area but permits exiting from the Work
 - 3. Mark outline of door on Primary and Critical Barriers with luminescent paint at least 1 inch (25.4 mm) wide. Hang a razor knife on a string beside outline. Arrange Critical and Primary barriers so that they can be easily cut with one pass of razor knife. Paint words "EMERGENCY EXIT" inside outline with luminescent paint in letters at least one foot high and 2 inches (50.8 mm) wide.
 - 4. Provide lighted EXIT sign at each exit.
 - 5. Provide battery-operated emergency lighting that switches on automatically in the event of a power failure.

3.4 CONTROL ACCESS:

- A. Isolate the Work Area to prevent entry by building occupants into Work Area or surrounding controlled areas. Accomplish isolation by the following:
 - 1. Submit to Designer a list of doors and other openings that must be secured to isolate Work Area. Include on list notation if door or opening is in an indicated exit route.
 - 2. After receiving written authorization from the Designer lock all doors into Work Area, or, if doors cannot be locked, chain shut. Notify the local fire department of the list of doors/or other openings which must be chained or otherwise secured shut. Cover any signs that direct emergency exiting, either outside or inside of Work Area, to locked doors. Do not obstruct doors required for emergency exits from Work Area or from building.
 - 3. After receiving written authorization from the Designer, construct partitions or closures across any opening into Work Area. Partitions are to be a minimum of 8 feet (2.44 meters) high.
 - 4. Fabricate partitions from 3-5/8 inch (9.21 cm) , 25 gage metal studs with ½ inch (1.27 cm) gypsum board on both faces. Brace at intervals of 4 feet (1.22 m) on center.
 - 5. Fabricate partitions from 2 inch X 4 inch (50.8mm X 101.6mm) wood studs with ½ inch (1.27 cm) plywood on both faces. Brace at intervals of 4 feet (1.25 m) on center.
 - 6. Fabricate partitions from 2 inch X 4 inch (50.8 mm X 101.6 mm) wood studs with ½ inch (1.27 cm) plywood on both faces. Brace at intervals of 4 feet (1.22 m) on center. Use only fire retardant treated
 - 7. Fabric-type folding partitions: provide temporary partitions across fabric-type folding doors or partitions into Work Area.

Section 02 80 42 © 4/27/21 20046 Page 5 of 13

- **8.** Rigid-type folding partitions: remove operating bar and latch on clean side of folding partitions. Fasten down operating lever with hook and chain or other secure device on Work Area side. At completion of all abatement work reinstall bar and latch and adjust for proper operation.
- **9.** Modify elevator controls to prevent elevators from stopping at doors in Work Areas. This work is to be performed by a qualified elevator technician.
- 10. Replace passage sets on doors required for exiting from Work Area with temporary locksets for duration of the project. Use entry type locksets that are key lockable from one side and always operable from inside. Install locksets with key side in stair tower and escape side on Work Area side. Provide one key to Owner and maintain one key in clean room of decontamination unit. After meeting Contractor release criteria set forth in Section "Project Decontamination", reinstall original passage sets and adjust for proper operation.
- **B.** Locked Access: Arrange Work Area so that the only access into Work Area is through lockable doors to personnel and equipment decontamination units.
 - 1. Install temporary doors with entrance type locksets that are key lockable from the outside and always unlocked and operable from the inside. Do not use deadbolts or padlocks.
 - 2. Replace locksets or passage sets on doors leading to decontamination units with temporary locksets for duration of the project. Remove any deadbolts or padlocks. Use entry type locksets that are key lockable from outside and always unlocked and operable from inside. After meeting contractor release criteria set forth in Section "Project Decontamination" reinstall original locks, passage sets and locksets and adjust for proper operation.
 - 3. Provide one key for each door to Owner, and Designer and maintain one key in clean room of decontamination unit (3 total).
- C. Visual Barrier: Where the Work Area is immediately adjacent to or within view of occupied areas, provide a visual barrier of opaque polyethylene sheeting at least 6 mil (0.15 mm) in thickness so that the work procedures are not visible to building occupants. Where this visual barrier would block natural light, substitute frosted or woven rip-stop sheet plastic in locations approved by the Designer.
- **D. Demarcation.** Demarcate the regulated area in any manner that minimizes the number of persons within the area and protects persons outside the area from exposure to airborne concentrations of asbestos. Where critical barriers or negative pressure enclosures are used, they may demarcate the regulated area.
- **E. Access.** Limit access to regulated areas to authorized persons as defined by OSHA, and to the Owner, Designer, Project Administrator or a representative authorized by one of these entities.
- F. Provide Warning Signs at each locked door leading to Work Area reading as follows:
 - 1. Print text in both English and Spanish

Legend Notation

KEEP OUT

3 inch (77 mm) Sans Serif Gothic or Block
BEYOND THIS POINT

1 inch (25.4 mm) Sans Serif Gothic or Block
ASBESTOS ABATEMENT WORK

1 inch (25.4 mm) Sans Serif Gothic or Block

IN PROGRESS

1 inch (25.4 mm) Sans Serif Gothic or Block

1 inch (25.4 mm) Sans Serif Gothic or Block

BREATHING ASBESTOS DUST 14 Point Gothic

Section 02 80 42 © 4/27/21 20046



MAY BE HAZARDOUS TO YOUR

HEALTH

2. Provide Warning Signs at each locked door leading to Work Area reading as follows

Notation Legend

KEEP OUT 3 inch (77 mm) Sans Serif Gothic or Block CONSTRUCTION 1 inch (25.4 mm) Sans Serif Gothic or Block WORK AREA 1 inch (25.4 mm) Sans Serif Gothic or Block

PROTECTIVE CLOTHING 14 Point Gothic

REQUIRED BEYOND THIS POINT

3. Immediately inside door and outside critical barriers post an approximately 20 inch by 14 inch (508 mm X 356 mm) manufactured caution sign displaying the following legend with letter sizes and styles of a visibility required by 29 CFR 1926:

Legend

DANGER ASBESTOS MAY CAUSE CANCER CAUSES DAMAGE TO LUNGS AUTHORIZED PERSONNEL ONLY WEAR RESPIRATORY PROTECTION AND PROTECTIVE CLOTHING IN THIS AREA

4. Provide spacing between respective lines at least equal to the height of the respective upper line.

3.5 ALTERNATE METHODS OF ENCLOSURE:

- A. Alternate methods of containing the Work Area may be submitted to the Designer for approval in accordance with procedures set forth in Section "Substitutions". Do not proceed with any such method(s) without prior written approval of the Designer.
- B. Notification: Before work which involves the removal of more than 25 linear or 10 square feet (7.5 linear meters or 3 square meters) of thermal system insulation or surfacing material is begun using an alternative method which has been the subject of required evaluation and certification. Send a copy of such evaluation and certification to the national office of OSHA, Office of Technical Support, Room N3653, 200 Constitution Avenue, NW, Washington, DC 20210 and to the Designer.
- C. Use a control method that encloses, contains or isolates the processes or source of airborne asbestos dust, or otherwise captures or redirects such dust before it enters the breathing zone of employees.
- D. Certification: Submit a certification from a certified industrial hygienist (CIH) or licensed professional engineer who is also qualified as a project designer, who has evaluated the work area, the projected work practices and the engineering controls and who certifies in writing that the planned control method is adequate to reduce direct and indirect employee exposure to below the PELs and any requirements of Section "Respiratory Protection" under worst-case conditions of use, and that the planned control method will prevent asbestos contamination outside the regulated area, as measured by clearance sampling which meets the requirements of EPA's Asbestos in Schools rule issued under AHERA, or perimeter monitoring which meets the criteria of OSHA 1926.1101, and as determined in accordance with the portion of Section "Summary of Work - Asbestos Abatement" that describes the Owner's monitoring of the project.

© 4/27/21 20046 Page 7 of 13

Section 02 80 42

3.6 RESPIRATORY AND WORKER PROTECTION:

- **A. Before proceeding** beyond this point in providing Temporary Enclosures:
 - 1. Provide Worker Protection
 - **2.** Provide Respiratory Protection
 - 3. Provide Personnel Decontamination Unit

3.7 CRITICAL BARRIERS:

- A. Completely Separate the Work Area from other portions of the building, and the outside by closing all openings with sheet plastic barriers at least 6 mil (0.15 mm) in thickness, or by sealing cracks leading out of Work Area with duct tape.
- B. Individually seal all ventilation openings (supply and exhaust), lighting fixtures, clocks, doorways, windows, convectors and speakers, and other openings into the Work Area with duct tape alone or with polyethylene sheeting at least 6 mil (0.15 mm) in thickness, taped securely in place with duct tape. Maintain seal until all work including Project Decontamination is completed. Take care in sealing of lighting fixtures to avoid melting or burning of sheeting.
- **C. Provide Sheet Plastic** barriers at least 6 mil (0.15 mm) in thickness as required to seal openings completely from the Work Area into adjacent areas. Seal the perimeter of all sheet plastic barriers with duct tape or spray cement.
- D. Mechanically Support sheet plastic independently of duct tape or spray cement seals so that seals do not support the weight of the plastic. Following are acceptable methods of supporting sheet plastic barriers. Alternative support methods may be used if approved in writing by the Designer.
 - 1. Plywood squares 6 inch x 6 inch x 3/8 inch (152 mm x 152 mm x 9.53mm) held in place with one 6d smooth masonry nail or electro-galvanized common nail driven through center of the plywood and duct tape on plastic so that plywood clamps plastic to the wall. Locate plywood squares at each end, corner and at maximum 4 feet (1.22 m) on centers.
 - 2. Nylon or polypropylene rope or wire with a maximum unsupported span of 10 feet (3.05 m), minimum 1/4 inch (6.35 mm) in diameter suspended between supports securely fastened on either side of opening at maximum 1 foot (304.8 mm) below ceiling. Tighten rope so that it has 2 inches (50.8 mm) maximum dip. Drape plastic over rope from outside Work Area so that a two foot long flap of plastic extends over rope into Work Area. Staple or wire plastic to itself 1 inch (25.4 mm) below rope at maximum 6 inches (152 mm) on centers to form a sheath over rope. Lift flap and seal to ceiling with duct tape or spray cement. Seal loop at bottom of flap with duct tape. Erect entire assembly so that it hangs vertically without a "shelf" upon which debris could collect.
- **E. Provide Pressure Differential System** per Section "Temporary Pressure Differential & Air Circulation System".
 - 1. Clean housings and ducts of all overspray materials prior to erection of any Critical Barrier that will restrict access.

3.8 PREPARE AREA:

- **A. Scaffolding:** If fixed scaffolding is to be used to provide access HEPA vacuum and wet clean area prior to scaffolding installation.
- B. Remove all electrical and mechanical items, such as lighting fixtures, clocks, diffusers, registers, Section 02 80 42

 © 4/27/21 20046 | WYNN L, WHITE

escutcheon plates, etc. which cover any part of the surface to be worked on with the work.

- **C.** Remove all general construction items such as cabinets, casework, door and window trim, moldings, ceilings, trim, etc., which cover the surface of the work as required to prevent interference with the work. Clean, decontaminate and reinstall all such materials, upon completion of all removal work with materials, finishes, and workmanship to match existing installations before start of work.
- D. Clean all contaminated furniture, equipment, and or supplies with a HEPA filtered vacuum cleaner or by wet cleaning, as specified in Section "Project Decontamination", prior to being moved or covered. All equipment furniture, etc. is to be deemed contaminated unless specifically declared as uncontaminated on the drawings or in writing by the Designer.
- **E. Clean All Surfaces In Work Area** with a HEPA filtered vacuum or by wet wiping prior to the installation of primary barrier.
- **F.** Cleaning and Sealing Surfaces: After cleaning with water and a HEPA vacuum, surfaces of stationary objects should be covered with two layers of plastic sheeting. The sheeting should be secured with duct tape or an equivalent method to provide a tight seal around the object.

3.9 PRIMARY BARRIER:

- **A. Protect building and other surfaces** in the Work Area from damage from water and high humidity or from contamination from asbestos-containing debris, slurry or high airborne fiber levels by covering with a primary barrier as described below.
 - 1. Strippable Coating: If strippable coating is used, perform all work in strict compliance with manufacturer's instructions. Carry out work in the following sequence.
 - a. Inspect: Before start of coating work inspect all surfaces to be coated. Report on any surfaces that may be damaged by the material or any condition that may interfere with adhesion of the coating to a surface to the Designer before application of coating.
 - b. Photograph or videotape existing damage to affected surfaces and submit documentation to Designer.
 - c. Test Patches: Apply test patches as directed by Owner or Designer. Apply a small area of strippable coating to a hidden or obscure area of each surface in the Work Area to be coated. Allow to dry and peal off. Demonstrate results to Designer prior to coating entire area. Commence coating of area only after receiving written authorization from the Designer.
 - d. Cover surfaces and equipment in work are from which coating may not strip cleanly.
 - e. Cover shelving, clocks, light fixtures and other equipment with one layer of 6 mil (0.15 mm) sheet plastic.
 - f. Cover fabric, paper, cork wall coverings or unpainted gypsum board with one layer of 6 mil (0.15 mm) sheet plastic.
 - g. Tape over any cracks that are larger than 1/16 inch (1.59 mm).
 - h. Tape over electrical outlets, switches, door locks etc.
 - i. Wood paneling in area may have the finish partially removed by the strippable coating.

 © 4/27/21 20046 WYNN L WHITE

These surfaces are to be coated directly with strippable coating and are not to be covered with sheet plastic. Refinishing of the this paneling will be accomplished by the Owner and is not a part of the work of this contract.

- 1) Cover wood paneling in Work Area with one layer of 6 mil (0.15 mm) sheet plastic.
- 2) Apply small area of coating in concealed location to wood finishes in Work Area. If finish is removed when coating is stripped inform Designer. Cover wood surface with one layer of 6 mil (0.15 mm) sheet plastic unless otherwise notified by Designer.
- 3) Base bid is for direct coating of wood paneling.
- 4) If a layer of sheet plastic is necessary this will be a change to the Contract Sum. Submit proposal for change in Contract Sum for the addition of sheet plastic to the Designer.
- j. Cover carpeting with three (3) layers of polyethylene sheeting at least 6 mil (0.15 mm) in thickness. Place corrugated cardboard sheets between the top and middle layers of polyethylene.
- k. Do not use strippable coating as an adhesive to hold sheet plastic in place.
- I. Coat or cover windows into Work Area:
 - Coat windows with window coating applied in a minimum 10 mil (0.254 mm) thickness when wet.
- m. Protect critical barriers: Install strippable coating so that it will not remove critical barriers during stripping of coating. Cover critical barriers comprised of sheet plastic with a second layer of sheet plastic configured to be removed with strippable coating. Protect critical barriers made from tape with a protective layer of sheet plastic or duct tape.
- n. Coat all surfaces in Work Area with strippable coating in following order.
 - 1) Walls: Coat seams, corners, and junctions vertically. Coat balance of walls horizontally lapping over vertical sprayed areas by 50%.
 - Floor: Coat floor lapping wall by 12 inches (305mm). Start at point furthest from entrance to Work Area and work toward door.
 - 3) Use straight edge to shield ACM from coating during spray application.

© 4/27/21 20046 WYNN L, WHILE CONSULTING CONSULTING FINGINFERS INC.

> Apply: to a minimum of the following thicknesses. Thickness is to be measured when O. material is wet using a wet film thickness gauge.

SURFACE TO BE COATED	MINIMUM THICKNESS WHEN WET	REQUIRED COATING TYPE
Critical Barriers	Not Applicable	Sheet Plastic Covers
Glass	10 mil (0.254 mm)	Window Coating
Plastic Over Glass	2 mil (0.051 mm)	Wall Coating
Paneling Painted Walls, Wall Covering	12 mil (0.305 mm)	Wall Coating
Glazed Tile Smoothly Painted Brick, Painte	15 mil (0.381 mm) d Concrete Block	Wall Coating
Floors	15 mil (0.381 mm)	Floor Coating
Unpainted Brick Unpainted Concrete Block, Rou	20 mil (0.51 mm) ıgh Wood	Wall Coating

- Coat brick and concrete block with a sufficient thickness of coating to obscure color of 1) substrate completely.
- 2) Do not apply over tacky or chalky adhesives remaining from carpet or other flooring covering removal.
- Respiratory protection: Require that all workers in Work Area from start of spray operation p. until all surfaces are dry use as a minimum requirement a half-face negative pressure respirator equipped with combination ammonia and HEPA type filter cartridges or other appropriate respiratory protection as required by OSHA 29 CFR 1926.1101(h)(2) and as specified in Section "Respiratory Protection".
- Worker protection: Equip all workers in Work Area during spray operation with eye q. protection, disposable gloves, and disposable paper suits.
- r. Ventilation: during spraying operation maintain a minimum of 4 air changes per hour in the entire Work Area. Operate one additional HEPA filtered fan unit per spray operator in area while spraying is taking place.
- 2. Sealing Elevators: If an elevator shaft is located in the regulated area, it should be either shut down or isolated by sealing with two layers of plastic sheeting. The sheeting should provide enough slack to accommodate the pressure changes in the shaft without breaking the air-tight seal.
- 3. Elevator: Coat walls, floor and ceiling of elevator in same manner as Work Area. Arrange entry to Work Area so that elevator door is in a positively pressurized space outside the clean room of the decontamination unit. At completion of work clean elevator as set forth in Section "Project Decontamination". Refer to Section "Summary of the Work" for additional requirements for protection of elevator.

Section 02 80 42 © 4/27/21 20046 Page 11 of 13

4. Sheet Plastic: Protect surfaces in the Work Area with two (2) layers of plastic sheeting on floor and walls, or as otherwise directed on the Contract Drawings or in writing by the Designer. Perform work in the following sequence.

- a. All seams in the sheeting should overlap, be staggered and not be located at corners or wall-to-floor joints.
- b. Unless work includes floor tile/mastic removal, cover floor of Work Area with 2 individual layers of clear polyethylene sheeting, each at least 6 mil (0.15 mm) in thickness, turned up walls at least 12 inches (305 mm). Form a sharp right angle bend at junction of floor and wall so that there is no radius which could be stepped on causing the wall attachment to be pulled loose. Both spray-glue and duct tape all seams in floor covering. Locate seams in top layer six feet from, or at right angles to, seams in bottom layer. Install sheeting so that top layer can be removed independently of bottom layer.
- c. Unless work includes removal of carpeting and floor tile/mastic, cover carpeting with three (3) layers of polyethylene sheeting at least 6 mil (0.15 mm) in thickness. Place corrugated cardboard sheets between the top and middle layers of polyethylene.
- d. Cover Sheet Plastic in areas where scaffolding is to be used with a single layer of ½ inch (13 mm) CDX plywood or 1/4 inch (6.5 mm) tempered hardboard. Wrap edges and corners of each sheet with duct tape. At completion of abatement work wrap plywood or hardboard with 2 layers of 6 mil (0.15 mm) polyethylene and move to next Work Area or dispose of as an asbestos-contaminated waste material in accordance with section "Disposal of Regulated Asbestos Containing Materials".
- e. Cover all walls in Work Area including "Critical Barrier" sheet plastic barriers with one layer of polyethylene sheeting, at least 6 mil (0.15 mm) in thickness, mechanically supported and sealed with duct tape or spray-glue in the same manner as "Critical Barrier" sheet plastic barriers. Tape all joints including the joining with the floor covering with duct tape or as otherwise indicated on the Contract Documents or in writing by the Designer.
- f. Elevator: Cover walls, floor and ceiling of elevator with 2 layers of 6 mil (0.15 mm) polyethylene. Arrange entry to Work Area so that elevator door is in a positively pressurized space outside the clean room of the decontamination unit. At completion of work clean elevator as set forth in Section "Project Decontamination". Refer to Section "Summary of the Work" for additional requirements for protection of elevator.
- g. Stairs and Ramps: Do not cover stairs or ramps with unsecured sheet plastic. Where stairs or ramps are covered with plastic, provide 3/4 inch (19.1 mm) exterior grade plywood treads securely held in place, over plastic. Do not cover rungs or rails with any type of protective materials.
- h. Repair of Damaged Polyethylene Sheeting: Remove and replace plastic sheeting which has been damaged by removal operations or where seal has failed allowing water to seep between layers. Remove affected sheeting and wipe down entire area. Install new sheet plastic only when area is completely dry.

© 4/27/21 20046 WYNN L, WHITE

3.10 ISOLATION AREA:

- A. Maintain isolation areas between the Work Area and adjacent building area:
 - **1.** In locations shown on the plans.
 - 2. In unoccupied rooms located between Work Area and adjacent occupied portions of the building.
 - **3.** In locations where separation between Work Area and occupied portions of building is formed by sheet plastic and/or temporary barriers.
 - 4. Floor below Work Area.
- **B. Form isolation area** by controlling access to the space in the same manner as a Work Area. Physically isolate the space from the Work Area and adjacent areas. Accomplish physical isolation by:
 - 1. Installing critical barriers in unoccupied space.
 - 2. Erecting a second Critical Barrier a minimum of 3 feet (1.0 m) away from Work Area.

3.11 STOP WORK:

A. If the Critical or Primary barrier falls or is breached in any manner stop asbestos removal work immediately and comply with "Stop Work" requirements of Section "Summary of Work - Asbestos Abatement". Do not start work until authorized in writing by the Designer.

3.12 EXTENSION OF WORK AREA:

A. Extension of Work Area: If the Critical Barrier is breached in any manner that could allow the passage of asbestos debris or airborne fibers, then add affected area to the Work Area, enclose it as required by this Section of the specification and decontaminate it as described in Section "Project Decontamination".

3.13 SECONDARY BARRIER:

A. Secondary layer of plastic as a drop cloth to protect the primary layer from debris generated by the asbestos abatement work is specified in the appropriate work sections.

3.14 EXTERIOR ENCLOSURES:

A. Construct exterior enclosures as a Critical Barrier as necessary to completely enclose the work. Fabricate from reinforced polyethylene sheeting and 2 inch x 4 inch (51mm X 102 mm) wood framework. Attach to existing building components or brace as necessary for lateral stability. Construct walls to meet all state and local regulations for construction of temporary buildings. Construct to resist a wind of 30 MPH (13.41 m/s), slope ceiling to permit drainage of rain water.

END OF SECTION - 02 80 42

© 4/27/21 20046 WYNN L, WHITE Page 13 of 13

SECTION 02 80 43 - REGULATED AREAS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division-2 Specification Sections, apply to work of this section.

1.2 RELATED WORK SPECIFIED ELSEWHERE:

- A. Worker Protection: is specified in Section "Worker Protection - Asbestos Abatement".
- B. **Respiratory Protection:** is specified in Section "Respiratory Protection"
- C. Wet Decontamination Facilities: are described in Section "Decontamination Units."

1.3 DESCRIPTION OF WORK:

A. Work of this section consists of preparing a Regulated Area for the work.

1.4 SUBMITTALS

- A. Before the Start of Work: Submit the following to the Designer for review. Begin no work until these submittals are returned with Designer's action stamp indicating that the submittal is returned for unrestricted use or final-but-restricted use.
 - 1. HEPA Filtered Vacuum Cleaners: Submit product data.
 - 2. Signs: Submit samples of each type of sign to be used.
 - 3. Warning Tape: Submit samples.

PART 2 - EQUIPMENT

2.1 PRODUCTS

A. **HEPA Filter Vacuum Cleaners:**

- 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products which may be incorporated in the Work include, but are not limited to, the following:
- 2. Manufacturer: Subject to compliance with requirements, provide products of one of the following:

Nilfisk of America, Inc. www.nikliskcfm.com

Minuteman International www.minutemanintl.com

Sylvane, Inc. www.sylvane.com

Plastic Sheet: B.

Plastic Sheet: A single polyethylene film in the largest sheet size possible to minimize seams, 6.0 mil 1.

(0.15 mm) thick, clear, frosted, or black as indicated.

PART 3 - EXECUTION

3.1 SECURING WORK AREA:

A. Secure work area from access by occupants, staff or users of the building. Accomplish this where possible, by locking doors, windows, or other means of access to the area, by scheduling work for periods of time that the building in unoccupied, or by constructing temporary wood stud and plywood barriers.

3.2 DEMARCATION OF REGULATED AREA:

- A. **Demarcation.** Demarcate the Regulated Area with a sheet plastic drop cloth, signs and barrier tape. Configure the regulated area in a manner that minimizes the number of persons within the area and protects persons outside the area from exposure to airborne concentrations of asbestos.
 - 1. Drop Cloth: Cover floor in vicinity of Work Area and six (6) feet (1.82 meters) beyond, with 6 mil (0.15 mm) polyethylene drop sheet. Where work is adjacent to wall, extend drop sheet up wall and secure at ceiling with duct tape. This drop sheet demarcates the boundary of the Regulated Area.
 - 2. Signs: Post warning signs that carry the following legends in both English and Spanish:
 - First Sign: Provide warning signs at each locked door leading to the controlled area reading a. as follows:

Notation Legend **KEEP OUT** 3 inch (76.2 mm) Block

Second Sign: Immediately inside the locked door and outside the controlled area post an b. approximately 20 inch by 14 inch (508 mm x 356 mm) manufactured caution sign displaying the following legend with letter sizes and styles of a visibility required by 29 CFR 1926: Legend:

> **DANGER ASBESTOS** MAY CAUSE CANCER CAUSES DAMAGE TO LUNGS AUTHORIZED PERSONNEL ONLY WEAR RESPIRATORY PROTECTION AND PROTECTIVE CLOTHING IN THIS **AREA**

3. Barrier Tape: Where the controlled area is in a large area such as on part of a boiler room or open office area, delineate area with 3 inch (76.2 mm) wide polyethylene ribbon with the printed warning, "CAUTION ASBESTOS REMOVAL". Install this ribbon at between 3 and 4 feet (0.91 and 1.22 meters) above the floor.

3.3 SCHEDULING:

A. Work may be carried out during normal working hours in those areas which can be completely secured by

lockable doors from access by building occupants and staff, and which have HVAC equipment that can be shut down and locked off. Otherwise, work is to be carried out after building occupants and cleaning staff have left.

3.4 GENERAL PROCEDURES:

- **A.** The following precautions and procedures have application to work of this section. Workers must exercise caution to avoid release of asbestos fibers into the air:
 - 1. Setup and management of the controlled area is to be under the supervision of a OSHA Competent Person as described in Section "Project Coordination Asbestos Abatement".
 - 2. Before start of work comply with requirement for in Sections "Worker Protection", and "Respiratory Protection".
 - **3.** Do not allow eating, drinking, smoking, chewing tobacco or gum, or applying cosmetics in the Regulated Area.
 - 4. Shut down any air handling equipment bringing air into or out of the Regulated Area.
 - 5. Clean any existing dust or debris from the floor and walls, and other surface in the immediate location of the work prior to commencing work by damp-mopping or by use of a High Efficiency Particulate Air (HEPA) filtered vacuum.
 - **6.** Cover floor in vicinity of Work Area and six (6) feet (1.82 meters) beyond, with 6 mil (0.15 mm) polyethylene drop sheet. Where work is adjacent to wall, extend drop sheet up wall and secure at ceiling with duct tape. This drop sheet demarcates the boundary of the Regulated Area.
 - 7. Seal all openings, supply and exhaust vents, and convectors within ten (10) feet (3.05 meters) of the Work Area with 6 mil (0.15 mm) polyethylene sheeting secured and completely sealed with duct tape.
 - **8.** Perform the work per the appropriate specification section.
 - **9.** Immediately remove any asbestos-containing debris by using a HEPA vacuum or by spraying with amended water or removal encapsulant, collecting with wet paper towels, placing in a disposal bag while still wet, and cleaning surfaces with wet paper towels.
 - Thoroughly decontaminate any tools or equipment used at completion of the work.
 - 11. If work day is complete or if moving to another regulated area: all workers remove paper suits turning them inside out while doing so.
 - 12. Place the suits in a properly labeled disposal bag.
 - 13. Neck down the bag and collapse it with the HEPA vacuum.
 - **14.** Twist the bag shut, bend over and seal with duct tape by wrapping around bag neck at least 3 times.

Section 02 80 43 **Regulated Areas**

Specifications 02 80 43-4

- 15. Clean all surfaces of the Work Area by use of a HEPA filter vacuum until no visible residue remains.
- B. At completion of work require all workers to complete decontamination procedures in accordance with Section "Worker Protection".
- C. Remove respirators using the procedure in Section "Worker Protection".
- D. At completion of work require all workers to complete wet decontamination procedures in accordance with Section "Worker Protection".

END OF SECTION - 02 80 43

SECTION 02 80 44 - WORKER PROTECTION - ASBESTOS ABATEMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division-2 Specification Sections, apply to work of this section.

1.2 DESCRIPTION OF WORK:

A. This section describes the equipment and procedures required for protecting workers against asbestos contamination and other workplace hazards except for respiratory protection.

1.3 RELATED WORK SPECIFIED ELSEWHERE:

A. Respiratory Protection: is specified in Section "Respiratory Protection".

1.4 WORKER TRAINING:

- A. AHERA Accreditation: All workers are to be accredited as Abatement Workers as required by the EPA Model Accreditation Plan (MAP) asbestos abatement worker training (40 CFR Part 763, Subpart E, Appendix C).
- **B. State and Local License:** All workers are to be trained, certified and accredited as required by state or local code or regulation.
- **C. Training:** Provide training for all workers that is the equivalent in curriculum, training method and length to the EPA Model Accreditation Plan (MAP) asbestos abatement worker training (40 CFR Part 763, Subpart E, Appendix C).

1.5 MEDICAL SURVEILLANCE:

- A. Provide a medical surveillance program as required in the OSHA standard (29 CFR 1926.1101).
- **B.** Provide a medical surveillance program and physician's opinion before a respirator is assigned as required by 29 CFR 1910.134 and 29 CFR 1926.103(e)(10).
- **C. Provide medical examination** that as a minimum meets OSHA requirements as set forth in 29 CFR 1926.1101. In addition, require that the physician provide an evaluation of the individual's ability to work in environments capable of producing heat stress in the worker.

1.6 SUBMITTALS:

- **A. Before Start of Work:** Submit the following to the Designer for review. Do not start work until these submittals are returned with Designer's action stamp indicating that the submittal is returned for unrestricted use.
 - 1. AHERA Accreditation: Submit copies of certificates from an EPA-approved AHERA Abatement Workers course for each worker as evidence that each asbestos Abatement Worker is accredited as required by the EPA Interim Final Model Accreditation Plan (MAP) asbestos abatement worker training (40 CFR Part 763, Subpart E, Appendix C).

Section 02 80 44 ©

- 2. State and Local License: Submit evidence that all workers have been trained, certified and accredited as required by state or local code or regulation.
- 3. Certificate Worker Acknowledgment: Submit an original signed copy of the Certificate of Worker's Acknowledgment found at the end of this section, for each worker who is to be at the job site or enter the Work Area.
- **4. Report from Medical Examination:** conducted within last 12 months as part of compliance with OSHA medical surveillance requirements for each worker who is to enter the Work Area. Submit, at a minimum, for each worker the following:
 - a. Name
 - The physician's written opinion as to whether the employee has any detected medical conditions that would place the employee at an increased risk of material health impairment from exposure to asbestos;
 - c. Any recommended limitations on the employee or on the use of personal protective equipment such as respirators; and
 - d. A statement that the employee has been informed by the physician of the results of the medical examination and of any medical conditions that may result from asbestos exposure.
 - e. A statement that the employee has been informed by the physician of the increased risk of lung cancer attributable to the combined effect of smoking and asbestos exposure (29 CFR 1926.1101(m)).
 - f. A legible typed version of the physician's name, the physician's signature, and date of examination.
- 4. **Notarized Certifications:** Submit certification signed by an officer of the abatement contracting firm that exposure measurements, medical surveillance, and worker training records are being kept in conformance with 29 CFR 1926.

PART 2 - EQUIPMENT

2.1 PROTECTIVE CLOTHING:

- A. General. Provide and require the use of protective clothing, such as coveralls or similar whole-body clothing, head coverings, gloves, and foot coverings for any employee exposed to airborne concentrations of asbestos that exceed the TWA and/or excursion limit prescribed by 29 CFR 1926.1101 or for which a required negative exposure assessment is not produced, and for any employee performing Class I operations which involve the removal of over 25 linear or 10 square feet (7.5 linear meters or 3 square meters) of TSI or surfacing ACM or PACM.
- **B.** Coveralls: Provide disposable full-body coveralls and disposable head covers, and require that they be worn by all workers in the Work Area. Provide a sufficient number for all required changes, for all workers in the Work Area.
- **C.** Coveralls: Provide cloth full-body coveralls and hats, require that they be worn by all workers in the Work Area. Require that workers change out of coverall in the Equipment Room of the Personnel Decontamination Unit. Dispose of coverall as asbestos waste at completion of all work.

Section 02 80 44

Wynn L. White Consulting Engineers, Inc. (225) 761-9141

© 4/27/21 20046

- D. Additional Protective Clothing: Provide each worker with the protective clothing as required by Federal State and local regulations. This includes, but is not necessary limited by Hardhats, Cold weather gear, Glove, boots and goggles.
- E. Cold Weather Gear: Provide each worker with an insulated jacket, pants, gloves, and hat. Require that cold weather gear be removed in Equipment Room of Personnel Decontamination Unit. Dispose of cold weather gear as asbestos waste at completion of all work.
- F. Boots: Provide work boots with non-skid soles, and where required by OSHA, foot protectives, for all workers. Provide boots at no cost to workers. Paint uppers of all boots red with waterproof enamel. Do not allow boots to be removed from the Work Area for any reason, after being contaminated with ACM. Dispose of boots as asbestos-contaminated waste at the end of the work.
- G. Hard Hats: Provide head protectives (hard hats) as required by OSHA for all workers, and provide 4 spares for use by Designer, Project Administrator, and Owner. Label hats with same warning labels as used on disposal bags. Require hard hats to be worn at all times that work is in progress that may potentially cause head injury. Provide hard hats of type with plastic strap type suspension. Require hats to remain in the Work Area throughout the work. Thoroughly clean, decontaminate and bag hats before removing them from Work Area at the end of the work.
- H. Goggles: Provide eye protection (goggles) as required by OSHA for all workers involved in scraping, spraying, or any other activity which may potentially cause eye injury. Thoroughly clean, decontaminate and bag goggles before removing them from Work Area at the end of the work.
- I. Gloves: Provide work gloves to all workers and require that they be worn at all times in the Work Area. Do not remove gloves from Work Area and dispose of as asbestos-contaminated waste at the end of the work.

2.2 ADDITIONAL PROTECTIVE EQUIPMENT:

A. Disposable coveralls, head covers, and footwear covers shall be provided by the Contractor for the Owner, Designer, Project Administrator, and other authorized representatives who may inspect the job site. Provide six (6) complete coveralls per day.

PART 3 - EXECUTION

3.1 GENERAL:

- A. Provide worker protection as required by the most stringent OSHA and/or EPA standards applicable to the work. The following procedures are minimums to be adhered to regardless of fiber count in the Work Area.
- В. Each time Work Area is entered remove all street clothes in the Changing Room of the Personnel Decontamination Unit and put on new disposable coverall, new head cover, and a clean respirator. Proceed through shower room to equipment room and put on work boots.

3.2 DECONTAMINATION PROCEDURES:

A. Require all workers to adhere to the following personal decontamination procedures whenever they leave the Work Area:

Section 02 80 44 © 4/27/21 20046 Page 3 of 6 Specifications

- 1. Type C Supplied Air or Powered Air-Purifying Respirators: Require that all workers use the following decontamination procedure as a minimum requirement whenever leaving the Work Area:
 - When exiting area, remove disposable coveralls, disposable head covers, and disposable a. footwear covers or boots in the equipment room.
 - Still wearing respirators, proceed to showers. Showering is mandatory. Care must be taken b. to follow reasonable procedures in removing the respirator to avoid asbestos fibers while showering. The following procedure is required as a minimum:
 - Thoroughly wet body including hair and face. If using a Powered Air-Purifying Respirator c. (PAPR) hold blower unit above head to keep canisters dry.
 - d. With respirator still in place thoroughly wash body, hair, respirator face piece, and all parts of the respirator except the blower unit and battery pack on a PAPR. Pay particular attention to seal between face and respirator and under straps.
 - e. Take a deep breath, hold it and/or exhale slowly, completely wet hair, face, and respirator. While still holding breath, remove respirator and hold it away from face before starting to breathe.
 - f. Carefully wash facepiece of respirator inside and out.
- 2. If using PAPR: shut down in the following sequence, first cap inlets to filter cartridges, then turn off blower unit (this sequence will help keep debris which has collected on the inlet side of filter from dislodging and contaminating the outside of the unit). Thoroughly wash blower unit and hoses. Carefully wash battery pack with wet rag. Be extremely cautious of getting water in battery pack as this will short out and destroy battery.
 - Shower completely with soap and water. a.
 - b. Rinse thoroughly.
 - Rinse shower room walls and floor prior to exit. c.
 - d. Proceed from shower to Changing Room and change into street clothes or into new disposable work items.
- 3. Air Purifying-Negative Pressure Respirators: Require that all workers use the following decontamination procedure as a minimum requirement whenever leaving the Work Area with a half or full face cartridge type respirator:
 - a. When exiting area, remove disposable coveralls, disposable head-covers, and disposable footwear covers or boots in the Equipment Room.
 - b. Still wearing respirators, proceed to showers. Showering is mandatory. Care must be taken to follow reasonable procedures in removing the respirator and filters to avoid asbestos fibers while showering. The following procedure is required as a minimum:
 - c. Thoroughly wet body from neck down.
 - d. Wet hair as thoroughly as possible without wetting the respirator filter if using an air purifying © 4/27/21 20046

Section 02 80 44

type respirator.

- e. Take a deep breath, hold it and/or exhale slowly, complete wetting of hair, thoroughly wetting face, respirator and filter (air purifying respirator). While still holding breath, remove respirator and hold it away from face before starting to breathe.
- f. Dispose of wet filters from air purifying respirator.
- g. Carefully wash facepiece of respirator inside and out.
- h. Shower completely with soap and water.
- i. Rinse thoroughly.
- j. Rinse shower room walls and floor prior to exit.
- k. Proceed from shower to Changing Room and change into street clothes or into new disposable work items.
- **B.** Remote Shower: The procedures above are to be used if the decontamination facility is used as a remote shower. If a worker cannot gain direct access to the Equipment Room require that he enter Decontamination Unit and proceed directly through Shower Room to Equipment Room. Decontamination procedure is then completed as required above.

C. Within Work Area:

1. Require that workers NOT eat, drink, smoke, chew tobacco or gum, or apply cosmetics in the Work Area. To eat, chew, drink or smoke, workers shall follow the procedure described above, then dress in street clothes before entering the non-Work Areas of the building.

3.3 CERTIFICATE OF WORKER'S ACKNOWLEDGEMENT:

Following this section is a Certificate of Worker Training. After each worker has been included in the Contractor's Respiratory Protection Program, completed the training program and medical examination, secure a fully executed copy of this form.

END OF SECTION - 02 80 44

© 4/27/21 20046 WYNN L, WHILE

CERTIFICATE OF WORKER'S ACKNOWLEDGEMENT

worker training (40 CFR Part 763, Subpart E, Appendix C).

02 80 44-6

DATE _____ PROJECT NAME PROJECT ADDRESS _____ CONTRACTOR'S NAME _____ WORKING WITH ASBESTOS CAN BE DANGEROUS. INHALING ASBESTOS FIBERS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCER. IF YOU SMOKE AND INHALE ASBESTOS FIBERS THE CHANCE THAT YOU WILL DEVELOP LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC. Your employer's contract with the Owner for the above project requires that: You be supplied with the proper respirator and be trained in its use. You be trained in safe work practices and in the use of the equipment found on the job. You receive a medical examination. These things are to have been done at no cost to you. RESPIRATORY PROTECTION: You must have been trained in the proper use of respirators, and informed of the type respirator to be used on the above referenced project. You must be given a copy of the written respiratory protection manual issued by your employer. You must be equipped at no cost with the respirator to be used on the above project. TRAINING COURSE: You must have been trained in the dangers inherent in handling asbestos and breathing asbestos

MEDICAL EXAMINATION: You must have had a medical examination within the past 12 months at no cost to you. This examination must have included: health history, pulmonary function tests and may have included an evaluation of a chest x-ray.

dust and in proper work procedures and personal and area protective measures. This training must have been the equivalent in curriculum, training method and length to the EPA Model Accreditation Plan (MAP) asbestos abatement

By signing this document you are acknowledging only that the Owner of the building you are about to work in has advised you of your rights to training and protection relative to your employer.

Signature	Employee Number	
Printed Name	Witness	

Section 02 80 44 © 4/27/21 20046 Wynn L. White Consulting Engineers, Inc. (225) 761-9141

SECTION 02 80 45 - RESPIRATORY PROTECTION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division-2 Specification Sections, apply to work of this section.

1.2 DESCRIPTION OF WORK:

A. Instruct and train each worker involved in asbestos abatement or maintenance and repair of friable asbestos-containing materials (ACM) in proper respiratory use and require that each worker always wear a respirator, properly fitted on the face in the Work Area from the start of any operation which may cause airborne asbestos fibers until the Work Area is completely decontaminated. Use respiratory protection appropriate for the fiber level encountered in the work place or as required for other toxic or oxygen-deficient situations encountered.

1.3 DEFINITIONS:

- **A.** "Negative Pressure Respirator": A respirator in which the air pressure inside the respiratory-inlet covering is positive during exhalation in relation to the air pressure of the outside atmosphere and negative during inhalation in relation to the air pressure of the outside atmosphere.
- **B.** "Protection Factor": The ratio of the ambient concentration of an airborne substance to the concentration of the substance inside the respirator at the breathing zone of the wearer. The protection factor is a measure of the degree of protection provided by a respirator to the wearer.
- **C.** "Respirator": A device designed to protect the wearer from the inhalation of harmful atmospheres.

1.4 STANDARDS:

- A. Except to the extent that more stringent requirements are written directly into the Contract Documents, the latest edition of the following regulations and standards have the same force and effect (and are made a part of the Contract Documents by reference) as if copied directly into the Contract Documents, or as if published copies were bound herewith. Where there is a conflict in requirements set forth in these regulations and standards, meet the more stringent requirement.
 - OSHA U.S. Department of Labor Occupational Safety and Health Administration, Safety and Health Standards Section 29 CFR 1910.1001, Section 1910.134, and Section 29 CFR 1926.1101.
 - **2. CGA** Compressed Gas Association, Inc., New York, Pamphlet G-7, "Compressed Air for Human Respiration", and Specification G-7.1 "Commodity Specification for Air".
 - **3. CSA** -Canadian Standard Association, Rexdal, Ontario, Standard Z180.1, "Compressed Breathing Air".
 - 4. ANSI American National Standard Practices for Respiratory Protection, ANSI Z88.2.

© 4/27/21 20046 WYNN L, WHITE

- 5. NIOSH National Institute for Occupational Safety and Health
 - NIOSH Respirator Decision Logic (May 1987) DHHS/NIOSH Publication No. 87-108;
 - NIOSH/EPA, "A Guide to Respiratory Protection for the Asbestos Abatement Industry" EPA-560-OPTS-86-001 (September 1986);
 - 42 CFR 84, NIOSH Standard for Certification of Non-Powered Air Purifying Respirator filters;
 - 30 CFR 11, NIOSH Certification of Respirators
- **6. MSHA** Mine Safety and Health Administration

1.5 SUBMITTALS:

- A. Before Start of Work submit the following to the Designer for review. Do not begin work until these submittals are returned with the Designer's action stamp indicating that the submittal is returned for unrestricted use.
 - 1. **Product Data:** Submit manufacturer's product information for each component used, including NIOSH and MSHA Certifications for each component in an assembly and/or for entire assembly.
 - 2. System Diagram: When a supplied air respiratory system is required by the work, submit drawing showing assembly of components into a complete supplied air respiratory system. Include diagram showing location of compressor, filter banks, backup air supply tanks, hose line connections in Work Area(s), routing of air lines to Work Area(s) from compressor.
 - **3. Operating Instruction:** Submit complete operating and maintenance instructions for all components and systems as a whole. Submittal is to be in bound manual form suitable for field use.
 - **4. Respiratory Protection Program:** Submit Contractor's written respiratory protection program manual as required by OSHA 1926.1101.
 - 5. Initial Exposure Assessment: Submit level of respiratory protection intended for each operation required by the project. Base this selection on an "Initial Exposure Assessment" as required by OSHA 29 CFR 1926.1101. Submit information to support this "Initial Exposure Assessment" on the form included at the end of this Section.
 - Submit data from exposure monitoring for the PEL and EL from prior asbestos jobs within 12 months;
 - Submit monitoring and analysis that were performed in compliance with the OSHA asbestos standard in effect:
 - c. Submit data that was obtained under workplace conditions "closely resembling" those that will exist during the Work;
 - d. Submit data from past asbestos jobs where the type of asbestos abatement and other work, material, control methods, work practices, and environmental conditions closely resemble those that will exist during the Work;
 - e. Submit exposure date from prior asbestos jobs where the work that was conducted by employees whose training and experience are no more extensive than that of employees performing the current job;
- f. Based on the exposure data from the previous asbestos jobs, select respiratory protection for Section 02 80 45

 © 4/27/21 20046 | WYNN | WHITE

the Work that will, to a high degree of certainty, prevent worker exposures (inside the respirator) that exceed the Permissible Exposure Limits (PEL) set forth in this Section of the specifications.

6. Resume information: Submit resume and information on training for individual monitoring the operation of supplied air respiratory systems. Submit training certifications where applicable.

1.6 AIR QUALITY FOR SUPPLIED AIR RESPIRATORY SYSTEMS:

A. Provide air used for breathing in supplied air respiratory systems that meets or exceeds standards set for C.G.A. type 1 (Gaseous Air) Grade H or CSA Z180.1 whichever presents the more stringent quality standard:

1.7 ALLOWABLE CONTAMINANTS:

- A. Supply air that has an asbestos concentration no greater than outside ambient conditions.
- B. Supply air that meets the level of contaminants allowed according to the air quality standard specified.
- **C.** The table below sets forth the quantity of any given contaminant allowed according to the referenced standards:

	CGA			CSA
		(Gaseous Air)		Z180.1
CONTAMINANT	Grade D	Grade E	Grade H	
Carbon Monoxide, PPM/v	20	10	5	5
Carbon Dioxide, PPM/v	1000	500	500	500
Condensed Hydrocarbons, mg./cu. meter	5	5		1
Gaseous Hydrocarbons - as methane, PPM/v			10	25
Water Vapor - PPM/v	(1)	(1)	(1)	27
dewpoint	-50F	-50F	-50F	-63F
Objectionable Odors	None	None	None	None
Nitrogen Dioxide, PPM/v	_	_	0.5	0.2
Nitrous Oxide, PPM/v	_	_	_	5
Sulfur Dioxide, PPM/v	_	_	0.5	_
Halogenated solvents, PPM/v	_	_	1	_
Other gaseous contaminants	_	_	_	(2)
Inorganic particulates, mg./cu. meter	_	_	_	1

Indicates that the standard shows no limiting characteristics

© 4/27/21 20046



Wynn L. White Consulting Engineers, Inc. (225) 761-9141

Section 02 80 45

(1) The CGA standards do not indicate a specific moisture limit when the ambient temperature is above freezing. However, since a moisture content no greater than a -50 Degrees Fahrenheit (-45.56 Degrees Celsius) dewpoint (66 PPM/v) is necessary for carbon monoxide elimination, the CO limits could not be met unless the air were dried to a -50 Degrees Fahrenheit (-45.56 Degrees Celsius) dewpoint or better.

(2) Maximum allowable content of trichlorotrifluoroethane, dichlorodifluoromethane, and chlorodifluoromethane is 2 PPM/v for each. Unlisted contaminants shall not exceed one-tenth of the Threshold Limit Values (TLV's) for Chemical Substances in Workroom air adopted by the American Conference of Governmental Industrial Hygienists (ACGIH).

1.8 DELIVERY:

A. Deliver replacement parts, etc., not otherwise labeled by NIOSH or MSHA to job site in manufacturer's containers.

PART 2 - EQUIPMENT

2.1 AIR PURIFYING RESPIRATORS

- **A. Respirator Bodies:** Provide half face or full face type respirators. Equip full face respirators with a nose cup or other anti-fogging device as would be appropriate for use in air temperatures less than 32 degrees Fahrenheit (0 degrees Celsius).
- **B. Filter Cartridges:** Provide, at a minimum, HEPA type filters labeled with NIOSH and MSHA Certification for "Radionuclides, Radon Daughters, Dust, Fumes, Mists including Asbestos-Containing Dusts and Mists" and color coded in accordance with 42 CFR Part 84 and ANSI Z228.2. Also, additional cartridge sections may be added, if required, for solvents, etc., in use. In this case, provide cartridges that have each section of the combination canister labeled with the appropriate color code and NIOSH/MSHA Certification.
- **C. Non-permitted respirators.** Do not use single use, disposable or quarter face respirators.

2.2 SUPPLIED AIR RESPIRATOR SYSTEMS:

- **A. Provide equipment** capable of producing air of the quality and volume required by the above reference standards applied to the job site conditions and crew size. Comply with provisions of this specification if more stringent than the governing standard.
- **B.** Facepiece and Hose: Provide full facepiece and hose by same manufacturer that has been certified by NIOSH/MSHA as an approved Type "C" respirator assembly operating in pressure demand mode with a positive pressure facepiece.
- C. Auxiliary backup system: In atmospheres which contain sufficient oxygen (greater than or equal to 19.5 percent oxygen) provide a pressure-demand full facepiece supplied air respirator equipped with an emergency back up HEPA filter.
- D. Escape air supply: In atmospheres which are oxygen deficient (less than 19.5 percent oxygen) provide a pressure-demand full facepiece supplied air respirator incorporating an auxiliary self-contained breathing apparatus (SCBA) which automatically maintains an uninterrupted air supply in pressure demand mode with a positive pressure face piece.
- E. Backup air supply: Provide a reservoir of compressed air located outside the Work Area which will Section 02 80 45

automatically maintain a continuous uninterruptable source of air automatically available to each connected facepiece and hose assembly in the event of compressor shut-down, contamination of air delivered by compressor, power loss or other failure. Provide sufficient capacity in the back-up air supply to allow a minimum escape time of one-half hour times the number of connections available to the Work Area. Air requirement at each connection is the air requirement of the respirators in use plus the air requirement of an average-sized adult male engaged in moderately strenuous activity.

- **F.** Warning device: Provide a warning device that will operate independently of the building's power supply. Locate so that alarm is clearly audible above the noise level produced by equipment and work procedures in use, in all parts of the Work Area and at the compressor. Connect alarm to warn of:
 - 1. Compressor shut down or other fault requiring use of backup air supply
 - 2. Carbon Monoxide (CO) levels in excess of 5 PPM/V
- G. Carbon Monoxide (CO) Monitor: Continuously monitor and record on a strip chart recorder Carbon Monoxide (CO) levels. Place monitors in the air line between compressor and back-up air supply and between backup air supply and workers. Connect monitors so that they also sound an alarm as specified under "Warning Devices".
- **H. Compressor Shut Down:** Interconnect monitors, alarms and compressor so that compressor is automatically shut down and the alarms sound if any of the following occur:
 - 1. Carbon Monoxide (CO) concentrations exceed 5 PPM/v in the air line between the filter bank and backup air supply
 - 2. Compressor temperature exceeds normal operating range
- **I. Compressor Motor:** Provide a compressor driven by an electric motor. Do not use a gas or diesel engine to drive compressor. Insure that electrical supply available at the work site is adequate to energize motor.
- J. Compressor Location: Locate compressor outside of building in location that will not impede access to the building, and that will not cause a nuisance by virtue of noise or fumes to occupied portions of the building.
- **K. Air Intake:** Locate air intake remotely from any source of automobile exhaust or any exhaust from engines, motors, auxiliary generator or buildings.
- **L. After-Cooler:** Provide an after-cooler at entry to filter system which is capable of reducing temperatures to outside ambient air temperatures.
- **M. Self Contained Breathing Apparatus (SCBA):** Configure system to permit the recharging of ½ hour 2260 PSI (15.58 MPa) SCBA cylinders.

PART 3 - EXECUTION

3.1 GENERAL:

A. Respiratory Protection Program: Comply with ANSI Z88.2 "Practices for Respiratory Protection" and OSHA 29 CFR 1910.314 and 1926.103.

Section 02 80 45 © 4/27/21 20046 WYNN L. WHIT Wynn L. White Consulting Engineers, Inc. (225) 761-9141 Page 5 of 10 CONSULTING TO SHOW THE PROPERTY OF THE PROP

02 80 45-6 Specifications

- В. **Require** that respirators be used in the following circumstances:
 - 1. During all Class I asbestos jobs.
 - 2. During all Class II work where the ACM is not removed in a substantially intact state.
 - 3. During all Class II and III work, which is not performed using wet methods.
 - 4. During all Class II and III asbestos jobs where the employer does not produce a "negative exposure assessment".
 - 5. During all Class III jobs where TSI or surfacing ACM or PACM is being disturbed.
 - 6. During all Class IV work performed within regulated areas where employees performing other work are required to wear respirators.
 - 7. During all work covered by this section where employees are exposed above the OSHA PEL (TWA, or excursion limit).
 - 8. In emergencies. During emergencies where the airborne asbestos fiber concentration is not known, a self-contained breathing apparatus (SCBA) must be used.
- C. Require that respiratory protection be used at all times that there is any possibility of disturbance of ACM whether intentional or accidental.
- D. Require that a respirator be worn by anyone in a Work Area at all times, regardless of activity, during a period that starts with any operation which could cause airborne fibers until the area has been cleared for re-occupancy in accordance with Section "Project Decontamination".
- E. Regardless of Airborne Fiber Levels: Require that the minimum level of respiratory protection used be half-face air-purifying respirators with high efficiency filters.
- F. Do not allow the use of single-use, disposable, or quarter-face respirators for any purpose.

3.2 FIT TESTING:

- A. Initial Fitting: Provide initial fitting of respiratory protection during a respiratory protection course of training set up and administered by a individual qualified to do fit testing. Fit types and sizes of respirator to be actually worn by each individual. Allow an individual to use only those respirators for which training and fit testing has been provided.
- B. On a Weekly Basis, check the fit of each worker's respirator by having irritant smoke blown onto the respirator from a smoke tube.
- C. Upon Each Wearing: Require that each time an air-purifying respirator is put on it be checked for fit with a positive and negative pressure fit test in accordance with the manufacturer's instructions or ANSI Z88.2.

3.3 TYPE OF RESPIRATORY PROTECTION REQUIRED:

A. General: After reducing airborne asbestos levels to the lowest feasible level with engineering controls and work practices, provide respiratory protection as necessary to ensure that workers are not exposed to an airborne concentration of asbestos in excess of the Specified Permissible Exposure Limits (SPEL) set forth

Section 02 80 45

© 4/27/21 20046 CONSULTING

F ENGINEERS, INC.

in this Section.

- **B.** Level of Respiratory Protection: Determine the proper level of respiratory protection by dividing the expected or actual airborne fiber count in the Work Area by the "protection factors" given below. The level of respiratory protection which supplies an airborne fiber level inside the respirator, at the breathing zone of the wearer, at or below the Specified Permissible Exposure Limits (PEL) set forth in this Section is the minimum level of protection allowed.
- **C. Specific Respiratory Protection Requirements:** Provide respiratory protection as indicated below as a minimum requirement:
 - 1. Half-face Negative Pressure Air-Purifying Respirators: Provide half-face negative pressure air-purifying respirators during installation of Critical or Primary Barriers or other activities where there has been an "Initial Exposure Assessment" that has determined that airborne asbestos fiber levels will not exceed 0.1 fiber per cubic centimeter (0.1 f/cc). Provide a PAPR where a half-face negative pressure air-purifying respirator is allowed to any worker who so requests.
 - 2. Powered Air-Purifying Respirators (PAPR): Provide powered air-purifying respirators (PAPR) during removal of asbestos-containing thermal system insulation (TSI) or surfacing material where there has been an "Initial Exposure Assessment" that has determined that airborne asbestos fiber levels will not exceed 1.0 fiber per cubic centimeter (1.0 f/cc).
 - 3. Type "C" Supplied-air respirators: full facepiece pressure demand supplied air respirators are to be used by all workers engaged in the removal of thermal system insulation (TSI) or surfacing materials, or demolition of pipes, structures, or equipment covered or insulated with asbestos, or in the removal or demolition of asbestos insulation or coverings, or any other activity which results in or may result in airborne asbestos fiber levels above 1.0 fibers per cubic centimeter (1.0 f/cc).
- D. Provide a full facepiece supplied air respirator operated in the pressure demand mode equipped with an auxiliary positive pressure self-contained breathing apparatus for all workers within a regulated area where Class I work is being performed and for which an initial exposure assessment has not been produced. After an initial exposure assessment is made, use the level of respiratory protection required by that assessment and requirements of this specification and the OSHA Asbestos Construction Standard 29 CFR 1926.1101.

3.4 SPECIFIED PERMISSIBLE EXPOSURE LIMITS (SPEL):

- **A. Specified Permissible Exposure Limits (SPEL):** Ensure that no worker is exposed to an airborne concentration of asbestos in excess of the Time-Weighted Average (TWA) limit, and Excursion Limit (EL) set forth below.
 - 1. Time Weighted Average (TWA) limit Concentration of airborne asbestos fibers to which any worker may be exposed as an eight (8) hour time-weighted average (TWA) shall not exceed the following.
 - a. 0.01 fibers per cubic centimeter
 - **2. Excursion Limit (EL)** Concentration of airborne asbestos fibers to which any worker may be exposed as averaged over a sampling period of thirty (30) minutes shall not exceed the following.
 - a. 0.01 fibers per cubic centimeter
- **B. Fibers:** For purposes of this section, fibers are defined as all fibers regardless of composition as counted in the OSHA Reference Method (ORM), or NIOSH 7400 procedure.

Section 02 80 45 © 4/27/21 20046 WYNN L, WHI

1. Electron Microscopy: If Electron Microscopy is used to determine airborne fiber levels, only asbestos fibers will be enumerated, but fibers of any size detected by the testing of Section 01711 Project Decontamination will be counted.

3.5 RESPIRATORY PROTECTION FACTOR:

A.

Protection Factor Respirator Type 1. Air purifying: 10 Negative pressure respirator High efficiency filter Half facepiece 2. Air purifying: 50 Negative pressure respirator High efficiency filter Full facepiece 3. Powered Air Purifying (PAPR): 50 Positive pressure respirator High efficiency filter Half facepiece 4. 100 Powered air-purifying respirator equipped with high efficiency filters or any supplied air respirator operated in continuous flow mode. Full facepiece 5. Supplied air: 1.000 Positive pressure respirator Pressure demand or other positive pressure mode Full facepiece Equipped with an auxiliary HEPA cartridge or positive pressure

3.6 AIR PURIFYING RESPIRATORS:

- A. Negative pressure half or full face mask: Supply a sufficient quantity of respirator filters approved for asbestos, so that workers can change filters during the work day. Require that respirators be wet-rinsed, and filters discarded, each time a worker leaves the Work Area. Require that new filters be installed each time a worker re-enters the Work Area. Store respirators and filters at the job site in the changing room and protect totally from exposure to asbestos prior to their use.
- B. Powered air purifying half or full face mask: Supply a sufficient quantity of high efficiency respirator filters approved for asbestos so that workers can change filters at any time that flow through the facepiece Section 02 80 45
 © 4/27/21 20046

Self-contained breathing apparatus (SCBA) for escape

decreases to the level at which the manufacturer recommends filter replacement. Require that regardless of flow, filter cartridges be replaced after 40 hours of use. Require that HEPA elements in filter cartridges be protected from wetting during showering. Require entire exterior housing of respirator, including blower unit, filter cartridges, hoses, battery pack, face mask, belt, and cords, be washed each time a worker leaves the Work Area. Caution should be used to avoid shorting battery pack during washing. Provide an extra battery pack for each respirator so that one can be charging while one is in use.

3.7 SUPPLIED AIR RESPIRATOR:

A. Air Systems Monitor: Continuously monitor the air system operation including compressor operation, filter system operation, backup air capacity and all warning and monitoring devices at all times that system is in operation. Assign an individual, trained by manufacturer of the equipment in use or by a Certified Industrial Hygienist, in the operation and maintenance of the system to provide this monitoring. Assign no other duties to this individual that will take him away from monitoring the air system.

END OF SECTION - 02 80 45

© 4/27/21 20046 WYNN L, WHITE

Section 02 80 45

Section 02 80 45 **Respiratory Protection**

Specifications 02 80 45-10

INITIAL EXPOSURE ASSESSMENT

Project No:			Date:	
Project No:Project Name:			Date: Facility:	
Work Area(s):		-		
Reference Job:				
Description of Work:				
Asbestos Containing M	laterials	Asbe	stos/Type Percentage	
				_
		-		
	Personal Monitoring	Level Respirator	Comments	
	gh Low Averag			
Prep / Set up		<u> </u>		
Removal of Surface Tr				
Removal of TSI			-	
Removal of Misc Mat.				
Bag Out				
Clean Up		· 		
Other	 -		-	
				
Experience Level of W				
Reference Job:				
Description of Work:			_	
Asbestos Containing M	laterials	Asbe	stos/Type Percentage	
	D 114 ''	- 	·	
-	Personal Monitori		spirator Comments	
	gh Low Averag	e Worn		
Prep / Set up		·		
Removal of Surface Tr	<u> </u>	<u> </u>		
Removal of TSI				
Removal of Misc Mat.			<u> </u>	_
Bag Out				
Clean Up				
Other	·			
Experience Level of We	ork Force			
Expected Conditions	of This Joh			
=	ticipated Level	Respirator	Comments	
Prep / Set up	f/cc	respirator	Comments	
Removal of Surface Tr				
Removal of TSI	f/cc			
Removal of Misc Mat.	f/cc			
Bag Out	f/cc			
Clean Up	f/cc			
Other	f/cc			
Experience Level of We	ork Force			

© 4/27/21 20046 Section 02 80 45 CONSULTING TENGINEERS, INC. Page 10 of 10

SECTION 02 80 46 - DECONTAMINATION UNITS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division-2 Specification sections, apply to work of this section.

1.2 DESCRIPTION OF WORK:

A. Provide separate Personnel and Equipment Decontamination facilities. Require that the Personnel Decontamination Unit be the only means of ingress and egress for the Work Area. Require that all materials exit the Work Area through the Equipment Decontamination Unit.

1.3 RELATED WORK SPECIFIED ELSEWHERE:

A. Refer to Section "Temporary Facilities" - Asbestos Abatement for electrical requirements and requirements relative to connection of decontamination facilities to building systems such as water, sewer, and electrical.

1.4 SUBMITTALS

- **A. Before the Start of Work:** Submit the following to the Designer for review. Do not begin work until these submittals are returned with Designer's action stamp indicating that the submittal is returned for unrestricted use or final-but-restricted use.
 - **1.** Personnel Decontamination Unit: Provide shop drawing showing location and assembly of personnel decontamination units.
 - **2.** Equipment Decontamination Unit: Provide shop drawing showing location and assembly of equipment decontamination units.
 - 3. Shower Pan: Provide shop drawing.
 - **4.** Shower Walls: Provide product data.
 - 5. Shower Head and Controls: Provide product data.
 - **6.** Filters: Provide product data and shop drawing of installation on decontamination unit.
 - 7. Hose Bib: Provide product data.
 - Shower Stall: for Wash Down Station provide product data and shop drawing showing and modifications.
 - Elastomeric membrane: Provide product data.
 - 10. Lumber: Provide product data on fire resistance treatment.
 - 11. Sump Pump: Provide product data.
 - 12. Signs: Submit samples of signs to be used.

© 4/27/21 20046 WYNN L. WHITE

02 80 46-2 Specifications

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Polyethylene Sheet: A single polyethylene film in the largest sheet size possible to minimize seams, 6.0 mil (0.15 mm) thick, clear, frosted, or black as indicated.
- В. Polyethylene Sheet: Provide flame resistant polyethylene film that conforms to requirements set forth by the National Fire Protection Association Standard 701, Small Scale Fire Test for Flame-resistant Textiles and Films. Provide largest size possible to minimize seams, 6.0 mil (0.15 mm) thick, frosted or black as indicated.
- C. Reinforced Polyethylene Sheet: Where plastic sheet is the only separation between the Work Area and building exterior, provide translucent, nylon reinforced, laminated, flame resistant, polyethylene film that conforms to requirements set forth by the National Fire Protection Association Standard 701, Small Scale Fire Test for Flame-resistant Textiles and Films. Provide largest size possible to minimize seams, 6.0 mil (0.15 mm) thick, frosted or black as indicated.
- D. Duct Tape: Provide duct tape in 2 inch or 3 inch (51mm or 76 mm) widths as indicated, with an adhesive which is formulated to stick aggressively to sheet polyethylene.
- E. Spray Adhesive: Provide spray adhesive in aerosol cans which is specifically formulated to stick tenaciously to sheet polyethylene.
- F. Shower Pan: Provide one-piece waterproof shower pan 4 feet x 8 feet x 6 inches deep (102 mm X 204 mm x 152 mm deep). Fabricate from seamless fiberglass minimum 1/16 inch (1.59 mm) thick reinforced with wood, 18 ga. stainless or galvanized steel with welded seems, copper or lead with soldered seams, or a seamless liner of minimum 60 mil (1.5 mm) thick elastomeric membrane.
- G. Shower Walls: Provide 8 feet (2.44 m) long by approximately 7 feet (2.13 m) high walls fabricated from rigid, impervious, waterproof material, either corrugated fiberglass roofing or equivalent. Structurally support as necessary for stability.
- H. Shower Head and Controls: Provide a factory-made shower head producing a spray of water which can be adjusted for spray size and intensity. Feed shower with water mixed from hot and cold supply lines. Arrange so that control of water temperature, flow rate, and shut off is from inside shower without outside aid.
- I. Filters: Provide cascaded filter units on drain lines from showers or any other water source carrying asbestos-contaminated water from the Work Area. Provide units with disposable filter elements as indicated below. Connect so that discharged water passes primary filter and output of primary filter passes through secondary filter.
 - 1. Primary Filter - Passes particles 20 microns and smaller
 - 2. Secondary Filter - Passes particles 5 microns and smaller
- J. Hose Bib: Provide heavy bronze angle type with wheel handle, vacuum breaker, and 3/4 inch (19.05 mm) National Standard male hose outlet.
- K. Shower Stall: For Wash Down Station provide leak tight shower enclosure with integrated drain pan fabricated from fiberglass or other durable waterproof material, approximately 3 feet x 3 feet (0.91m x 0.91

© 4/27/21 20046

CONSULTING

F ENGINEERS, INC.

- m) square with minimum 6 feet (1.83 m) high sides and back. Structurally support as necessary for stability. Equip with hose bib, as specified in this section, mounted at approximately 4 feet (1.22 m) above drain pan. Connect drain to a reservoir, pump water from reservoir through filters to a drain or store and use for amended water. Mount filters inside shower stall on back wall beneath hose bib.
- **L. Elastomeric membrane:** Provide uniform flat sheets of flexible sheet roofing material fabricated from EPDM (ethylene propylene diene monomers) or Neoprene (polychloroprene), in a nominal 45 mil (1.14 mm) thickness.
- M. Lumber: Provide kiln dried lumber of any grade or species.
- N. Sump Pump: Provide totally submersible waterproof sump pump with integral float switch. Provide unit sized to pump 2 times the flow capacity of all showers or hoses supplying water to the sump, through the filters specified herein when they are loaded to the extent that replacement is required. Provide unit capable of pumping debris, sand, plaster or other materials washed off during decontamination procedures without damage to mechanism of pump. Adjust float switch so that a minimum of 3 inch (76 mm) remains between top of liquid and top of sump pan.

PART 3 - EXECUTION

3.1 PERSONNEL DECONTAMINATION UNIT:

- A. Provide a Personnel Decontamination Unit consisting of a serial arrangement of connected rooms or spaces, Changing Room, Drying Room, Shower Room, Equipment Room. Require all persons without exception to pass through this Decontamination Unit for entry into and exiting from the Work Area for any purpose. Do not allow parallel routes for entry or exit. Do not remove equipment or materials through Personnel Decontamination Unit. Provide temporary lighting within Decontamination Units as necessary to reach a lighting level of 100 foot candles (1076 lumens / sq meter).
- **B.** Changing Room (clean room): Provide a room that is physically and visually separated from the rest of the building for the purpose of changing into protective clothing.
 - 1. Construct using polyethylene sheeting, at least 6 mil (0.15 mm) in thickness, to provide an airtight seal between the Changing Room and the rest of the building.
 - **2.** Locate so that access to Work Area from Changing Room is through Shower Room.
 - 3. Separate Changing Room from the building by a sheet plastic flapped doorway.
 - 4. Require workers to remove all street clothes in this room, dress in clean, disposable coveralls, and don respiratory protection equipment. Do not allow asbestos-contaminated items to enter this room. Require Workers to enter this room either from outside the structure dressed in street clothes, or naked from the showers.
 - 5. An existing room may be utilized as the Changing Room if it is suitably located and of a configuration whereby workers may enter the Changing Room directly from the Shower Room. Protect all surfaces of room with sheet plastic as set forth in Section 01526 Temporary Enclosures. Authorization for this must be obtained from the Designer in writing prior to start of construction. Submit written request in accordance with Section 01632 "Substitutions" detailing layout and protective measures proposed.
 - **6.** Maintain floor of changing room dry and clean at all times. Do not allow overflow water from shower to wet floor in changing room.
 - 7. Damp wipe all surfaces twice after each shift change with a disinfectant solution.
 - **8.** Provide posted information for all emergency phone numbers and procedures.
 - **9.** Provide 1 storage locker per employee.
 - 10. Provide all other components indicated on the contract drawings.

© 4/27/21 20046 WYNN L, WHII

Page 3 of 9 CONSULTING

Section 02 80 46

- **C. Airlock:** Provide an airlock between Drying Room and Changing Room. This is a transit area for workers.
 - 1. Separate this room from Drying Room and Changing Room by sheet plastic flapped doorways.
 - 2. Separate this room from the rest of the building with airtight walls fabricated of 6 mil (0.15 mm) polyethylene.
 - 3. Separate this room from the Drying and Changing Rooms with airtight walls fabricated of 6 mil (0.15 mm) polyethylene.
- **D. Drying Room:** Provide a drying room as an airlock and a place for workers to dry after showering.
 - 1. Construct room by providing a pan continuous with or draining to Shower Room pan. Install a freely draining wooden or non-skid metal floor in pan at elevation of top of pan.
 - 2. Separate this room from the rest of the building with airtight walls fabricated of 6 mil (0.15 mm) polyethylene.
 - **3.** Separate this room from the Changing Room and Shower Room with airtight walls fabricated of 6 mil (0.15 mm) polyethylene.
 - **4.** Separate from Changing Room by a sheet plastic flapped doorway.
 - **5.** Provide a continuously adequate supply of disposable bath towels.
 - **6.** Provide a rigid, tight-sealing hinged door between Drying Room and Clean Room. Arrange so that there is a sensible movement of air from clean room through breathing zone of worker in Shower and Drying Room toward Equipment Room.
- **E. Shower Room:** Provide a completely watertight operational shower to be used for transit by cleanly dressed workers heading for the Work Area from the Changing Room, or for showering by workers headed out of the Work Area after undressing in the Equipment Room.
 - 1. Construct room by providing a shower pan and 2 shower walls in a configuration that will cause water running down walls to drip into pan. Install a freely draining wooden floor in shower pan at elevation of top of pan.
 - 2. Separate this room from the rest of the building with airtight walls fabricated of 6 mil (0.15 mm) polyethylene.
 - 3. Separate this room from the Drying Room and Airlock with airtight walls fabricated of 6 mil (0.15 mm) polyethylene.
 - **4.** Provide splashproof entrances to Drying Room and Airlock with doors arranged in the following configuration:
 - At each entrance to the Shower Room construct a door frame out of nominal 2 inch x 4 inch (51 mm X 102 mm) lumber with 1-1/2 inch (39 mm) jambs (sides) and 1-1/2 inch (39 mm) head (top) and sill (bottom). Attach to this door frame two overlapping flaps of elastomeric membrane material, fastened at the head (top) and jambs (sides) (by clamping between a 1-1/2 inch (39 mm) x 3/4 inch (19mm) batten and frame). Overlap the flaps a minimum of 6 inch (152 mm) in a direction that presents a shingle-like configuration to the water stream from the shower. Overlap sill (bottom) by 1-1/2 inch (39 mm) minimum. Arrange so that any air movement out of the Work Area will cause the flaps to seal against the door frame.
 - 5. Provide shower head and controls.
 - **6.** Provide temporary extensions of existing hot and cold water and drainage, as necessary for a complete and operable shower.
 - 7. Provide a soap dish and a continuously adequate supply of soap and maintain in sanitary condition.
 - 8. Arrange so that water from showering does not splash into the Changing or Equipment Rooms.
 - **9.** Arrange water shut off and drain pump operation controls so that a single individual can shower without assistance from either inside or outside of the Work Area.
 - **10.** Provide flexible hose shower head.

© 4/27/21 20046 WYNN L, WHIT

- 11. Pump waste water to drain or to storage for use in amended water. If pumped to drain, provide 20 micron and 5 micron waste water filters in line to drain or waste water storage. Change filters daily or more often if necessary. Locate filters inside shower unit so that water lost during filter changes is caught by shower pan.
- 12. Provide hose bib.
- 13. Provide all other items indicated on contract drawings.
- F. Airlock: Provide an airlock between Shower Room and Equipment Room. This is a transit area for workers. Separate this room from Equipment Room by a sheet plastic flap doorway.
 - 1. Separate this room from the rest of the building with airtight walls fabricated of 6 mil (0.15 mm) polyethylene.
 - 2. Separate this room from the Equipment Room and Shower Room with airtight walls fabricated of 6 mil (0.15 mm) polyethylene.
 - Separate from Equipment Room by a sheet plastic flapped doorway. 3.
- G. Equipment Room (contaminated area): Require work equipment, footwear and additional contaminated work clothing to be left here. This is a change and transit area for workers.
 - 1. Separate this room from the Work Area by a 6 mil (0.15 mm) polyethylene flapped doorway.
 - 2. Separate this room from the rest of the building with airtight walls fabricated of 6 mil (0.15 mm) polyethylene.
 - 3. Separate this room from the Shower Room and Work Area with airtight walls fabricated of 6 mil (0.15 mm) polyethylene.
 - 4. Provide a drop cloth layer of sheet plastic on floor in the Equipment Room for every shift change expected. Roll drop cloth layer of plastic from Equipment Room into Work Area after each shift change. Replace before next shift change. Provide a minimum of two (2) layers of plastic at all times. Use only clear plastic to cover floors.
- H. Airlock: Provide an airlock between Equipment Room and Work Area. This is a transit area for workers.
 - 1. Separate this room from Equipment Room and Work Area by a sheet plastic flapped doorways.
 - 2. Separate this room from the rest of the building with airtight walls fabricated of 6 mil (0.15 mm) polyethylene.
 - 3. Separate this room from the Equipment Room and Work Area with airtight walls fabricated of 6 mil (0.15 mm) polyethylene.
- I. Work Area: Separate Work Area from the Equipment Room by polyethylene barriers. If the airborne asbestos level in the Work Area is expected to be high, as in dry removal, add an intermediate cleaning space between the Equipment Room and the Work Area. Damp wipe clean all surfaces after each shift change. Provide one additional floor layer of 6 mil (0.15 mm) polyethylene per shift change and remove contaminated layer after each shift.
- J. **Decontamination Sequence:** Require that all workers adhere to the following sequence when entering or leaving the Work Area.
 - 1. Entering Work Area: Worker enters Changing Room and removes street clothing, puts on clean disposable overalls and respirator, and passes through the Shower Room into the Equipment Room.
 - 2. Any additional clothing and equipment left in Equipment Room needed by the worker are put on in the Equipment Room.
 - 3. Worker proceeds to Work Area.

© 4/27/21 20046

K. Exiting Work Area:

- 1. Before leaving the Work Area, require the worker to remove all gross contamination and debris from overalls and feet.
- 2. The worker then proceeds to the Equipment Room and removes all clothing except respiratory protection equipment.
- **3.** Extra work clothing such as boots, hard hats, goggles, gloves are to be stored in contaminated end of the Equipment Room.
- **4.** Disposable coveralls are placed in a bag for disposal with other material.
- 5. Require that Decontamination procedures be followed by all individuals leaving the Work Area.
- **6.** After showering, the worker moves to the Changing Room and dresses in either new coveralls for another entry or street clothes if leaving.

3.2 EQUIPMENT DECONTAMINATION UNIT:

- A. Provide an Equipment Decontamination Unit consisting of a serial arrangement of rooms, Clean Room, Holding Room, Wash Room for removal of equipment and material from Work Area. Do not allow personnel to enter or exit Work Area through Equipment Decontamination Unit.
- B. Arrange with airlocks between rooms as required below.
- **C. Wash Down Station:** Provide an enclosed Shower Unit located in Work Area just outside Wash Room as an equipment, bag and container cleaning station.
 - 1. Fabricate waterproof floor extending 6 feet (1.83 m) beyond Wash Down station in all directions. Install seamless waterproof membrane over area and extend over curbs on all four sides. Form curbs from 2 inch x 4 inch (51 X 102 mm) lumber laid on the flat.
 - 2. Waterproof membrane is to be fabricated from elastomeric membrane.
 - Do not allow water to collect on waterproof membrane. Remove continuously with a wet vacuum or mops.
- **D. Wash Room:** provide wash room for cleaning of bagged or containerized asbestos-containing waste materials passed from the Work Area.
 - 1. Construct wash room of nominal 2 inch x 4 inch (51 X 102 mm) wood framing and polyethylene sheeting, at least 6 mil (0.15 mm) in thickness and located so that packaged materials, after being wiped clean, can be passed to the Holding Room.
 - 2. Separate this room from the Work Area by a single flapped door of 6 mil (0.15 mm) polyethylene sheeting.
 - 3. Provide a drop cloth layer of plastic on floor in the Wash Room for every load-out operation. Roll this drop cloth layer of plastic from Wash Room into Work Area after each load-out. Provide a minimum of two (2) layers of plastic at all times. Use only clear plastic to cover floors.
- E. Airlock: Provide an airlock between Wash Room and Holding Room. This is a transit area.
 - 1. Separate this room from adjacent spaces by a sheet plastic flapped doorway.
 - 2. Separate this room from the rest of the building and adjacent spaces with airtight walls fabricated of 6 mil (0.15 mm) polyethylene.
- **F. Holding Room:** Provide Holding Room as a drop location for bagged asbestos-containing materials passed from the Wash Room. Construct Holding Room of nominal 2 inch x 4 inch (51 X 102 mm) wood framing and polyethylene sheeting, at least 6 mil (0.15 mm) in thickness and located so that bagged materials cannot be passed from the Wash Room through the Holding Room to the Clean Room.

Section 02 80 46 © 4/27/21 20046 WYNN L. WHIT

02 80 46-7 Specifications

- 1. Separate this room from the adjacent rooms by flap doors fabricated from 6 mil (0.15 mm) sheet
- G. Airlock: Provide an airlock between Holding Room and Clean Room. This is a transit area.
 - 1. Separate this room from adjacent spaces by a sheet plastic flap doorway.
 - 2. Separate this room from the rest of the building and adjacent spaces with airtight walls fabricated of 6 mil (0.15 mm) polyethylene.
- H. Clean Room: provide Clean Room to isolate the Holding Room from the building exterior. If possible locate to provide direct access to the Holding Room from the building exterior.
 - 1. Erect Critical and Primary Barriers as described in Section "Temporary Enclosures" in an existing space. If no space exists construct Clean Room of 2 x 4 (51 X 102 mm) wood framing and polyethylene sheeting, at least 6 mil (0.15 mm) in thickness.
 - 2. Separate this room from the exterior by a single flap door of 6 mil (0.15 mm) polyethylene sheeting.
- I. Load-out Area: The load-out area is the transfer area from the building to a truck or dumpster. It may be the Clean Room of the Equipment Decontamination unit or a separate room or loading dock area. Erect Critical and Primary barriers as described in Section "Temporary Enclosures" in load-out area.
 - 1. During transfer of material from load-out area erect primary barriers as described in Section "Temporary Enclosures" as necessary to seal path from load-out area to truck or dumpster.
- J. Decontamination Sequence: Take all equipment or material from the Work Area through the Equipment Decontamination Unit according to the following procedure:
 - 1. At washdown station, thoroughly wet clean contaminated equipment or sealed polyethylene bags and pass into Wash Room.
 - 2. When passing equipment or containers into the Wash Room, close all doorways of the Equipment Decontamination Unit, other than the doorway between the Washdown Station and the Wash Room. Keep all outside personnel clear of the Equipment Decontamination Unit.
 - 3. Once inside the washroom, wet clean the bags and/or equipment.
 - 4. When cleaning is complete pass items into Holding Room. Close all doorways except the doorway between the Holding room and the Clean Room.
 - 5. Workers from the building exterior enter Holding Area and remove decontaminated equipment and/or containers for disposal.
 - 6. Require these workers to wear full protective clothing and appropriate respiratory protection.
 - 7. At no time is a worker from an uncontaminated area to enter the enclosure when a removal worker is inside.

3.3 CONSTRUCTION OF THE DECONTAMINATION UNITS:

- A. Walls and Ceiling: Construct airtight walls and ceiling using polyethylene sheeting, at least 6 mil (0.15 mm) in thickness. Attach to existing building components or a temporary framework.
- В. Floors: Use 2 layers (minimum) of 6 mil (0.15 mm) polyethylene sheeting to cover floors in all areas of the Decontamination Units. Use only clear plastic to cover floors.
- C. Flap Doors: Fabricated from three (3) overlapping sheets with openings a minimum of three feet (3') (0.91 meters) wide. Configure so that sheeting overlaps adjacent surfaces. Weights at bottom of sheets as

WYNN L © 4/27/21 20046

ENGINEERS, INC.

required so that they quickly close after being released. Put arrows on sheets to indicate direction of overlap and/or travel. Provide a minimum of six feet (6') (1.22 meters) between entrance and exit of any room. Provide a minimum of three feet (3') (0.91 meters) between doors to airlocks.

- D. If the Decontamination area is located within an area containing friable asbestos on overhead ceilings, ducts, piping, etc., provide the area with a minimum 1/4 inch (6.4 mm) hardboard or 1/2 inch (12.7 mm) plywood "ceiling" with polyethylene sheeting, at least 6 mil (0.15 mm) in thickness covering the top of the "ceiling".
- E. Visual Barrier: Where the Decontamination area is immediately adjacent to and within view of occupied areas, provide a visual barrier of opaque polyethylene sheeting at least 6 mil (0.15 mm) in thickness so that worker privacy is maintained and work procedures are not visible to building occupants. Where the area adjacent to the Decontamination area is accessible to the public, construct a solid barrier on the public side of the sheeting to protect the sheeting. Construct barrier with wood or metal studs covered with minimum 1/4 inch (6.4 mm) thick hardboard or 1/2 inch (12.7 mm) plywood. Where the solid barrier is provided, sheeting need not be opaque.
- F. Alternate methods of providing Decontamination facilities may be submitted to the Designer for approval. Do not proceed with any such method(s) without written authorization of the Designer.
- G. Electrical: Provide subpanel at Changing Room to accommodate all removal equipment. Power subpanel directly from a building electrical panel.
 - 1. Connect all electrical branch circuits in Decontamination unit and particularly any pumps in shower room to a ground-fault circuit protection device.

3.4 CLEANING OF DECONTAMINATION UNITS:

- A. Clean debris and residue from inside of Decontamination Units on a daily basis or as otherwise indicated on Contract Drawings. Damp wipe or hose down all surfaces after each shift change. Clean debris from shower pans on a daily basis.
- B. If the Changing Room of the Personnel Decontamination Unit becomes contaminated with asbestoscontaining debris, abandon the entire Decontamination Unit and erect a new Decontamination Unit. Use the former Changing Room as an inner section of the new Equipment Room.

3.5 SIGNS:

- A. Post an approximately 20 inch by 14 inch (508 mm x 356 mm) manufactured caution sign at each entrance to the Work Area displaying the following legend with letter sizes and styles of a visibility required by 29 CFR 1926:
 - 1. Provide signs in both English and Spanish.
 - 2. Leaend:

DANGER

ASBESTOS

MAY CAUSE CANCER

CAUSES DAMAGE TO LUNGS

AUTHORIZED PERSONNEL ONLY

WEAR RESPIRATORY PROTECTION AND PROTECTIVE CLOTHING IN THIS AREA

3. Provide spacing between respective lines at least equal to the height of the respective upper line.

© 4/27/21 20046

- В. Post an approximately 10 inch by 14 (254 mm x 356 mm) inch manufactured sign at each entrance to each Work Area displaying the following legend with letter sizes and styles of a visibility at least equal to the following:
 - 1. Provide signs in both English and Spanish.

2. Legend **Notation**

NO FOOD, BEVERAGES OR TOBACCO PERMITTED 3/4 in (19 mm) Block

ALL PERSONS SHALL DON PROTECTIVE 3/4 in (19 mm) Block **CLOTHING (COVERINGS) BEFORE** ENTERING THE WORK AREA ALL PERSONS SHALL SHOWER IMMEDIATELY 3/4 in (19 mm) Block AFTER LEAVING WORK AREA AND BEFORE ENTERING THE CHANGING AREA

END OF SECTION - 02 80 46

© 4/27/21 20046

SECTION 02 82 05 - MATERIALS AND EQUIPMENT - ASBESTOS ABATEMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 2 Specification Sections, apply to this Section.

1.2 SUMMARY

- **A.** This Section includes administrative and procedural requirements governing the Contractor's selection of products for use in the Project.
- **B. Related Sections:** The following Sections contain requirements that relate to this Section:
 - 1. The Contractor's Construction Schedule is included under Section "Coordination Asbestos Abatement".
 - 2. The Contractor's Schedule of Submittals is included under Section "Submittals Asbestos Abatement".
 - **3.** The applicability of industry standards to products specified is included under Section "Reference Standards and Definitions Asbestos Abatement".
 - **4.** The administrative procedures for handling requests for substitutions made after award of the Contract is included under Section "Substitutions Asbestos Abatement".

1.3 DEFINITIONS

- A. **Definitions** used in this Article are not intended to change the meaning of other terms used in the Contract Documents, such as "specialties," "systems," "structure," "finishes," "accessories," and similar terms. Such terms are self-explanatory and have well-recognized meanings in the construction industry.
 - 1. "Products" are items purchased for incorporation in the Work, whether purchased for the Project or taken from previously purchased stock. The term "product" includes the terms "material," "equipment," "system," and terms of similar intent.
 - 2. "Named Products" are items identified by the manufacturer's product name, including make or model number or other designation, shown or listed in the manufacturer's published product literature that is current as of the date of the Contract Documents.
 - 3. "Foreign Products" as distinguished from "domestic products," are items substantially manufactured (50 percent or more of value) outside the United States and its possessions. Products produced or supplied by entities substantially owned (more than 50 percent) by persons who are not citizens of, nor living within, the United States and its possessions are also considered to be foreign products.
 - **4.** "Materials" are products substantially shaped, cut, worked, mixed, finished, refined or otherwise fabricated, processed, or installed to form a part of the Work.
 - **5.** "Equipment" is a product with operational parts, whether motorized or manually operated, that requires service connections, such as wiring or piping.
 - **6.** "Equipment" are products that may be either operational or fixed.

© 4/27/21 20046 WYNN L. WHITE

- Operational Equipment are products with operating parts, whether motorized or manually operated, that requires temporary or permanent service connections, such as wiring or piping.
- b. Fixed Equipment are products necessary for accomplishing the work that are used as a temporary facility during the work and removed afterward.

1.4 SUBMITTALS

Required submittals: A general listing of products requiring submittals is included at the end of Section "Submittals." This listing may not be complete. Submittal requirements are found in each specification section. Prepare a schedule in tabular form showing each product listed. Include the manufacturer's name and proprietary product names for each item listed.

- **A. Product List:** A list of products required is included at the end of this Section. Prepare a schedule in tabular form showing each product listed. Include the manufacturer's name and proprietary product names for each item listed.
- **B. Product List:** Prepare a list showing products specified in tabular form acceptable to the Owner's representative. Include generic names of products required. Include the manufacturer's name and proprietary product names for each item listed.
 - 1. Coordinate product list with the Contractor's Construction Schedule and the Schedule of Submittals.
 - **2.** Form: Prepare product list with information on each item tabulated under the following column headings:
 - a. Related Specification Section number.
 - b. Generic name used in Contract Documents.
 - c. Proprietary name, model number, and similar designations.
 - d. Manufacturer's name and address.
 - e. Supplier's name and address.
 - f. Installer's name and address.
 - g. Projected delivery date or time span of delivery period.
 - 3. Initial Submittal: Within 30 days after date of commencement of the Work, submit 3 copies of an initial product list. Provide a written explanation for omissions of data and for known variations from Contract requirements.
 - a. At the Contractor's option, the initial submittal may be limited to product selections and designations that must be established early in the Contract period.
 - **4.** Completed List: Within 10 days after date of commencement of the Work, submit 3 copies of the completed product list. Provide a written explanation for omissions of data and for known variations from Contract requirements.
 - 5. Designer's Action: The Designer will respond in writing to Contractor within 2 weeks of receipt of the completed product list. No response within this period constitutes no objection to listed manufacturers or products but does not constitute a waiver of the requirement that products comply with Contract Documents. The Owner's representative's response will include a list of unacceptable product selections, containing a brief explanation of reasons for this action.

Section 02 82 05 © 4/27/21 20046 WYNN L, WHITE

02 82 05-3 Specifications

1.5 QUALITY ASSURANCE

- A. Source Limitations: To the fullest extent possible, provide products of the same kind from a single source.
 - 1. When specified products are available only from sources that do not, or cannot, produce a quantity adequate to complete project requirements in a timely manner, consult with the Owner's representative to determine the most important product qualities before proceeding. Qualities may include attributes, such as visual appearance, strength, durability, or compatibility. When a determination has been made, select products from sources producing products that possess these qualities, to the fullest extent possible.
- В. Compatibility of Options: When the Contractor is given the option of selecting between 2 or more products for use on the Project, the product selected shall be compatible with products previously selected, even if previously selected products were also options.
 - 1. The contractor is responsible for providing products and construction methods that are compatible with products and construction methods to be installed after completion of the work of this contract.
 - 2. If a dispute arises between contractors over concurrently selectable, but incompatible products, the Designer will determine which products shall be retained and which are incompatible and must be replaced.
- C. Foreign Product Limitations: Except under one or more of the following conditions, provide domestic products, not foreign products, for inclusion in the Work:
 - 1. No available domestic product complies with the Contract Documents.
 - 2. Domestic products that comply with the Contract Documents are available only at prices or terms substantially higher than foreign products that comply with the Contract Documents.
- D. Nameplates: Except for required labels and operating data, do not attach or imprint manufacturer's or producer's nameplates or trademarks on exposed surfaces of products that will be exposed to view in occupied spaces or on the exterior.
 - 1. Labels: Locate required product labels and stamps on concealed surfaces or, where required for observation after installation, on accessible surfaces that are not conspicuous.
 - 2. Equipment Nameplates: Provide a permanent nameplate on each item of service-connected or power-operated equipment. Locate on an easily accessible surface that is inconspicuous in occupied spaces. The nameplate shall contain the following information and other essential operating data:
 - Name of product and manufacturer. a.
 - b. Model and serial number.
 - Capacity. c.
 - d. Speed.
 - Ratings.

1.6 PRODUCT DELIVERY, STORAGE, AND HANDLING

A. Deliver, store, and handle products according to the manufacturer's recommendations, using means and methods that will prevent damage, deterioration, and loss, including theft.

Section 02 82 05 © 4/27/21 20046 Page 3 of 5

02 82 05-4 Specifications

- 1. Schedule delivery to minimize long-term storage at the site and to prevent overcrowding of construction spaces.
- 2. Coordinate delivery with installation time to assure minimum holding time for items that are flammable, hazardous, easily damaged, or sensitive to deterioration, theft, and other losses.
- 3. Deliver products to the site in an undamaged condition in the manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting, and installing.
- Inspect products upon delivery to ensure compliance with the Contract Documents and to ensure 4. that products are undamaged and properly protected.
- 5. Store products at the site in a manner that will facilitate inspection and measurement of quantity or counting of units.
- 6. Store heavy materials away from the Project structure in a manner that will not endanger the supporting construction.
- 7. Store products subject to damage by the elements above ground, under cover in a weather tight enclosure, with ventilation adequate to prevent condensation. Maintain temperature and humidity within range required by manufacturer's instructions.

PART 2 - PRODUCTS

2.1 PRODUCT SELECTION

- A. General Product Requirements: Provide products that comply with the Contract Documents, that are undamaged and, unless otherwise indicated, new at the time of installation.
 - 1. Provide products complete with accessories, trim, finish, safety guards, and other devices and details needed for a complete installation and the intended use and effect.
 - 2. Standard Products: Where available, provide standard products of types that have been produced and used successfully in similar situations on other projects.
- В. Product Selection Procedures: The Contract Documents and governing regulations govern product selection. Procedures governing product selection include the following:
 - 1. Proprietary Specification Requirements: Where Specifications name only a single product or manufacturer, provide the product indicated. No substitutions will be permitted.
 - 2. Semi-proprietary Specification Requirements: Where Specifications name 2 or more products or manufacturers, provide 1 of the products indicated. No substitutions will be permitted.
 - Where Specifications specify products or manufacturers by name, accompanied by the term a. "or equal" or "or approved equal," comply with the Contract Document provisions concerning "substitutions" to obtain approval for use of an unnamed product.
 - 3. Nonproprietary Specifications: When Specifications list products or manufacturers that are available and may be incorporated in the Work, but do not restrict the Contractor to use of these products only, the Contractor may propose any available product that complies with Contract requirements. Comply with Contract Document provisions concerning "substitutions" to obtain approval for use of an unnamed product.
 - 4. Descriptive Specification Requirements: Where Specifications describe a product or assembly, listing exact characteristics required, with or without use of a brand or trade name, provide a product or assembly that provides the characteristics and otherwise complies with Contract requirements.

Section 02 82 05 © 4/27/21 20046

- **5.** Performance Specification Requirements: Where Specifications require compliance with performance requirements, provide products that comply with these requirements and are recommended by the manufacturer for the application indicated.
 - a. Manufacturer's recommendations may be contained in published product literature or by the manufacturer's certification of performance.
- **6.** Compliance with Standards, Codes, and Regulations: Where Specifications only require compliance with an imposed code, standard, or regulation, select a product that complies with the standards, codes, or regulations specified.
- **7.** Visual Matching: Where Specifications require matching an established Sample, the Designer's decision will be final on whether a proposed product matches satisfactorily.
 - a. Where no product available within the specified category matches satisfactorily and complies with other specified requirements, comply with provisions of the Contract Documents concerning "substitutions" for selection of a matching product in another product category.
- **8.** Visual Selection: Where specified product requirements include the phrase "... as selected from manufacturer's standard colors, patterns, textures ..." or a similar phrase, select a product and manufacturer that complies with other specified requirements. The Designer will select the color, pattern, and texture from the product line selected.
- **9.** Allowances: Refer to individual Specification Sections and "Allowance" provisions in Division 1 for allowances that control product selection and for procedures required for processing such selections.

PART 3 - EXECUTION

3.1 INSTALLATION OF PRODUCTS

- **A.** Comply with manufacturer's instructions and recommendations for installation of products in the applications indicated. Anchor each product securely in place, accurately located and aligned with other Work.
 - 1. Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration at time of Substantial Completion.

END OF SECTION 02 82 05

© 4/27/21 20046 WYNN L, WHITE

SECTION 02 82 06 - SUBSTITUTIONS - ASBESTOS ABATEMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 2 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for handling requests for substitutions made after award of the Contract.
- **B.** Related Sections: The following Sections contain requirements that relate to the Section:
 - Section "Reference Standards and Definitions Asbestos Abatement" specifies the applicability
 of industry standards to products specified.
 - Section "Coordination Asbestos Abatement" specifies requirements for submitting the Contractor's Construction Schedule.
 - 3. Section "Submittals Asbestos Abatement" specifies requirements for submitting the Submittal Schedule.
 - **4. Section "Materials and Equipment Asbestos Abatement"** specifies requirements governing the Contractor's selection of products and product options.

1.3 DEFINITIONS

- **A. Definitions** in this Article do not change or modify the meaning of other terms used in the Contract Documents.
- **B. Substitutions:** Changes in products, materials, equipment, and methods of construction required by the Contract Documents proposed by the Contractor after award of the Contract are considered to be requests for substitutions. The following are not considered to be requests for substitutions:
 - 1. Substitutions requested during the bidding period, and accepted by Addendum prior to award of the Contract, are included in the Contract Documents and are not subject to requirements specified in this Section for substitutions.
 - 2. Revisions to the Contract Documents requested by the Owner or Designer.
 - 3. Specified options of products and construction methods included in the Contract Documents.
 - **4.** The Contractor's determination of and compliance with governing regulations and orders issued by governing authorities.

1.4 SUBMITTALS

A. Substitution Request Submittal: The Designer will consider requests for substitution if received within 10 days after commencement of the Work. Requests received more than 10 days after commencement of the Section 02 82 06
© 4/27/21 20046
WYNN L, WHITE

02 82 06-2 Specifications

Work may be considered or rejected at the discretion of the Designer.

- 1. Submit electronic copies of each request for substitution for consideration. Submit requests in the form and according to procedures required for change-order proposals.
- 2. Identify the product or the fabrication or installation method to be replaced in each request. Include related Specification Section and Drawing numbers.
- 3. Provide complete documentation showing compliance with the requirements for substitutions, and the following information, as appropriate:
 - Coordination information, including a list of changes or modifications needed to other parts of a. the Work and to construction performed by the Owner and separate contractors that will be necessary to accommodate the proposed substitution.
 - b. A detailed comparison of significant qualities of the proposed substitution with those of the Work specified. Significant qualities may include elements, such as performance, weight, size, durability, and visual effect.
 - c. Product Data, including Drawings and descriptions of products and fabrication and installation procedures.
 - d. Samples, where applicable or requested.
 - A statement indicating the substitution's effect on the Contractor's Construction Schedule e. compared to the schedule without approval of the substitution. Indicate the effect of the proposed substitution on overall Contract Time.
 - f. Cost information, including a proposal of the net change, if any in the Contract Sum.
 - The Contractor's certification that the proposed substitution conforms to requirements in the g. Contract Documents in every respect and is appropriate for the applications indicated.
 - h. The Contractor's waiver of rights to additional payment or time that may subsequently become necessary because of the failure of the substitution to perform adequately.
- 4. Designer's Action: If necessary, the Designer will request additional information or documentation for evaluation within one week of receipt of a request for substitution. The Designer will notify the Contractor of acceptance or rejection of the substitution within 2 weeks of receipt of the request, or one week of receipt of additional information or documentation, whichever is later. Acceptance will be in the form of a change order.
 - а Use the product specified if the Designer cannot make a decision on the use of a proposed substitute within the time allocated.

PART 2 - PRODUCTS

2.1 SUBSTITUTIONS

A. Conditions: The Designer will receive and consider the Contractor's request for substitution when one or more of the following conditions are satisfied, as determined by the Designer. If the following conditions are not satisfied, the Designer will return the requests without action except to record noncompliance with these

Section 02 82 06 © 4/27/21 20046

requirements.

- 1. Extensive revisions to the Contract Documents are not required.
- 2. Proposed changes are in keeping with the general intent of the Contract Documents.
- **3.** The request is timely, fully documented, and properly submitted.
- 4. The specified product or method of construction cannot be provided within the Contract Time.
- **5.** The Designer will not consider the request if the product or method cannot be provided as a result of failure to pursue the Work promptly or coordinate activities properly.
- **6.** The request is directly related to an "or-equal" clause or similar language in the Contract Documents.
- 7. The requested substitution offers the Owner a substantial advantage, in cost, time, energy conservation, or other considerations, after deducting additional responsibilities the Owner must assume. The Owner's additional responsibilities may include compensation to the Designer for redesign and evaluation services, increased cost of other construction by the Owner, and similar considerations.
- **8.** The specified product or method of construction cannot receive necessary approval by a governing authority, and the requested substitution can be approved.
- **9.** The specified product or method of construction cannot be provided in a manner that is compatible with other materials and where the Contractor certifies that the substitution will overcome the incompatibility.
- **10.** The specified product or method of construction cannot be coordinated with other materials and where the Contractor certifies that the proposed substitution can be coordinated.
- 11. The specified product or method of construction cannot provide a warranty required by the Contract Documents and where the Contractor certifies that the proposed substitution provides the required warranty.
- **B.** The Contractor's submittal and the Designer's acceptance of Shop Drawings, Product Data, or Samples for construction activities not complying with the Contract Documents do not constitute an acceptable or valid request for substitution, nor do they constitute approval.

PART 3 - EXECUTION (Not Applicable)

END OF SECTION 02 82 06

© 4/27/21 20046 WYNN L, WHITE

SECTION 02 82 08 - PROJECT DECONTAMINATION

PART 1 - GENERAL

1.1 SUMMARY:

- A. Work of This Section includes the decontamination of air in the Work Area which has been, or may have been, contaminated by the elevated airborne asbestos fiber levels generated during abatement activities, or which may previously have had elevated fiber levels due to friable asbestos-containing materials (ACM) in the space.
- **B. Work of** This **Section** includes the cleaning, decontamination, and removal of temporary facilities installed prior to abatement work, including:
 - 1. Primary and Critical Barriers
 - 2. Decontamination Unit
 - 3. Pressure Differential System
- **C. Work of This Section** includes the cleaning, and decontamination of all surfaces (ceiling, walls, floor) of the Work Area, and all furniture or equipment in the Work Area.

1.2 RELATED DOCUMENTS:

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to work of this section.

1.3 DESCRIPTION OF REQUIREMENTS:

- **A. General: Decontamination** of the Work Area following asbestos abatement.
- **B.** If the asbestos abatement work is on damaged or friable materials the work is a four step procedure with two cleanings of the Primary Barrier plastic prior to its removal and two cleanings of the room surfaces to remove any new or existing contamination. Unless specifically indicated otherwise all materials are considered damaged or friable for purposes of this section.
- C. If the asbestos abatement work is on undamaged and non-friable materials the decontamination procedure is a two step procedure with two cleanings of the Primary Barrier plastic to remove contamination, thus preventing contamination of the building when the Work Area isolation barriers are removed.
- D. In both cases operation of the pressure differential system is used to remove airborne fibers generated by the abatement work.

1.4 RELATED WORK SPECIFIED ELSEWHERE:

A. Removal of Gross Debris is integral with the performance of abatement work and as such is specified in Section "Resilient Flooring Removal – Aggressive Asbestos Abatement".

1.5 CLEARANCE AIR SAMPLING BY THE OWNER:

A. To determine if the elevated airborne asbestos structure concentration encountered during abatement operations has been reduced to the specified level, the Owner will secure samples and analyze them Section 02 82 08

© 4/27/21 20046 WYNN L. WHITE

according to the following procedures.

- 1. Aggressive sampling procedures as described below will be followed.
- 2. TEM samples will be secured and analyzed as indicated below.
- Work Area Clearance: upon meeting the TEM Clearance requirements the work of Section Project Decontamination can continue.

1.6 AGGRESSIVE SAMPLING BY THE OWNER:

- A. All Air Samples will be taken using aggressive sampling techniques as follows:
 - Before sampling pumps are started the exhaust from forced-air equipment (leaf blower with an approximately 1 horsepower (746 watts) electric motor) will be swept against all walls, ceilings, floors, ledges and other surfaces in the room. This procedure will be continued for 5 minutes per 10,000 (283 cubic meters) cubic feet of room volume.
 - 2. One 20 inch (508 mm) diameter fan per 10,000 cubic feet (283 cubic meters) of room volume will be mounted in a central location at approximately 6 feet-6 inches (2 meters) above floor, directed toward ceiling and operated at low speed for the entire period of sample collection. Contractor shall provide leaf blower, fans, and electrical cords required for aggressive sampling.
 - Air samples will be collected in areas subject to normal air circulation away from room corners, obstructed locations, and sites near windows, doors of vents.
 - 4. After air sampling pumps have been shut off, fans will be shut off.
 - In work areas where a dirt floor or exposed fibrous glass insulation is in the space, but outside the
 work area, maintain a critical barrier to prevent disturbance of these surfaces during aggressive
 sampling.

NOTE: The Contractor shall provide all fans, leaf blowers, and extension cords necessary to complete aggressive sampling.

1.7 SCHEDULE OF CLEARANCE AIR SAMPLES BY OWNER:

- A. Sample cassettes: Samples will be collected on 25 mm. cassettes as follows:
 - **1. TEM:** 0.45 micrometer mixed cellulose ester or 0.40 micrometer polycarbonate, with 5.0 micron mixed cellulose ester backing filter.
- **B. Number and Volume of Samples:** The number and volume of air samples given in the schedules is approximate. The exact number and volume of samples collected by the Owner may vary depending upon job conditions. Contractor shall make all efforts to construct work area enclosures in such a manner that minimizes the number of work area containments required for clearance while including all building work areas where clearance sampling is required.
- C. Sampling sensitivity:
 - **1. TEM:** Analytical Sensitivity as set forth in the analytical method used or the AHERA regulation.

Section 02 82 08 © 4/27/21 20046 WYNN L. WHIT

1.8 TRANSMISSION ELECTRON MICROSCOPY:

A. In each Work Area after completion of all cleaning work, a minimum of 7 samples will be taken and analyzed as follows:

Location Sampled	Number of Samples	Analytical Sensitivity Struct/cc	Approx. Volume (L)	Approx. Flow (LPM)
Each Work Area	5	0.005	1,300-1,800	1-15
Work Area Blank	1	0.005	0	Open for 30 Seconds
Laboratory Blank	1	0.005	0	Do Not Open

- **B. Analysis** will be performed using the analysis method set forth in the AHERA Regulation 40 CFR Part 763 Appendix A.
- **C. Asbestos Structures** referred to in this Section include asbestos fibers, bundles, clusters or matrices, as defined by method of analysis.
- D. Release Criteria: Asbestos Decontamination of the work site is complete if the following conditions are met:
 - 1. Work Area Samples are below filter background levels
 - a. All Work Area sample volumes are greater than 1,199 liters for a 25 mm. sampling cassette.
 - b. The average concentration of asbestos of the five Work Area Samples does not exceed the filter background level of 70 structures per square millimeter of filter area.
- **E.** If these conditions are not met then the decontamination is incomplete, repeat the cleaning procedures of this section. If work area release criteria are not met, the Contractor shall be responsible for the cost of any failed clearance tests (including analytical costs and air monitoring fees).
- **F. Termination of Analysis:** if the arithmetic mean (average) asbestos concentration on the blank filters exceeds 70 structures per square millimeter of filter area the analysis will cease and new samples collected.
- G. Termination of Analysis: if the sample media are overloaded, the analysis will cease and new samples shall be collected.

1.9 LABORATORY TESTING BY THE OWNER:

- A. Transmission Electron Microscopy by the Owner:
 - 1. Samples will be sent by overnight courier as required for analysis by Transmission Electron Microscopy. Samples will not be carried on weekends, so that samples shipped on Friday will arrive on the following Monday. Verbal results will normally be available during the 5th working day after receipt of samples by the laboratory. The laboratory is capable of analyzing a maximum of 13 such samples from this project at any one time. All Transmission Electron Microscopy results will be

Section 02 82 08 © 4/27/21 20046 WYNN L, WHIII

available to the Contractor.

2. Submit with bid unit cost for each day of waiting beyond that set forth in the paragraph above.

1.10 SUBMITTALS:

- A. Before Start of Work submit the following to the Designer for review. Do not begin work until these submittals are returned with the Designer's action stamp indicating that the submittal is returned for "Unrestricted Use" or "Final but Restricted Use."
 - 1. Submit test report from an independent testing laboratory on the fire resistance rating of the assembly of the spray back fireproofing on the lock-back sealer used.
- В. Before Start of Work submit the following to the Designer for review. Do not begin work until these submittals are returned with the Designer's action stamp indicating that the submittal has been' "Received -Not Reviewed."
 - 1. Material Safety Data Sheet: Submit Material Safety Data Sheets, or equivalent, in accordance with the OSHA Hazard Communication Standard (29 CFR 1910.1200) for the following:
 - a. "Lock-Back," sealer.

PART 2 - PRODUCTS (NOT APPLICABLE)

PART 3 - EXECUTION

3.1 START OF WORK:

- A. Previous Work: During completion of the asbestos abatement work specified in other sections, the Secondary Barrier of polyethylene sheeting will have been removed and disposed of along with any gross debris generated by the asbestos abatement work.
- В. Visual inspection: Perform visual inspections of the work area along with the Project Administrator at each step of the decontamination process.
 - 1. Follow inspection procedures in the American Society for Testing and Material (ASTM) standard for visual inspections, ASTM E1368.
- C. Start of Work: Work of this section begins with the cleaning of the Primary Barrier. At start of work the following will be in place:
 - 1. Primary Barrier: Two layers of polyethylene sheeting on floor and one layer on walls.
 - 2. Critical Barrier: An airtight barrier between the Work Area and other portions of the building or the outside.
 - 3. Critical Barrier Sheeting: Over lighting fixtures and clocks, ventilation openings, doorways, convectors, speakers and other openings.
 - 4. Decontamination Units: For personnel and equipment in operating condition.
 - 5. Pressure Differential System: In operation.

3.2 FIRST CLEANING:

First Cleaning: Carry out a first cleaning of all surfaces of the work area including items of remaining Section 02 82 08 © 4/27/21 20046

sheeting, tools, scaffolding and/or staging by use of damp-cleaning and mopping, and/or a High Efficiency Particulate Air (HEPA) filtered vacuum. (Note: A HEPA vacuum may fail if used with wet material.) Do not perform dry dusting or dry sweeping. Use each surface of a cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible debris from removed materials or residue on plastic sheeting or other surfaces.

- 1. Remove All Filters in Air Handling System(s) and dispose of as asbestos-containing waste in accordance with requirements of Section "Disposal of Regulated Asbestos-Containing Material".
- 2. After the surfaces have passed a visual inspection verifying that all debris and residue has been removed from the sheet plastic, allow a waiting period that is long enough for the HEPA-filtered fan units operating in the work area to to clean air of airborne asbestos fibers. Use oscillating fans as necessary to assure circulation of air in all parts of work areas during this period. Maintain Pressure Differential System in operation.

3.3 SECOND CLEANING:

- **A. Second Cleaning:** Carry out a second cleaning of all surfaces in the work area in the same manner as the first cleaning.
- B. Visual inspection: Before the application of any sealer to abated surfaces as a lock-back, perform a visual inspection to determine if all ACM including debris and residue has been removed. Perform visual inspections along with Project Administrator. When the area is visually clean, and if after sweeping of all surfaces with leaf blower, no debris, residue, dust or other material is found, complete the certification at the end of this section. Visual inspection is not complete until confirmed in writing, on the certification, by Project Administrator. After this visual inspection is passed, lock-back sealants can be applied and the work area decontamination process can be initiated.
- **C. Sealing of substrate:** Perform sealing of substrate or installation of spray-applied finishes or fireproofing, where required, at this time. Maintain Pressure Differential System in operation during encapsulation work. Perform work only after meeting the following requirements:
 - 1. Surfaces to be covered with sealer have met the requirements for a visual inspection in this section.
 - 2. Airborne fiber counts in the Work Area are at or below 0.01 fibers per cubic centimeter as measured by phase contrast microscopy.

D. Removal of Primary Barriers:

- 1. Immediately following the second cleaning of the Primary plastic, remove all Primary Barrier sheeting and Material Decontamination Unit, if there is one, leaving only:
 - a. Critical Barrier: Which forms the sole barrier between the Work Area and other portions of the building or the outside.
 - b. Critical Barrier Sheeting: Over lighting fixtures and clocks, ventilation openings, doorways, convectors, speakers, and other openings.
 - c. Decontamination Unit: For personnel, in operating condition.
 - d. Pressure Differential System: Maintain in continuous operation.

3.4 THIRD CLEANING:

A. Third cleaning: Carry out a third cleaning of all surfaces in the work area in the same manner as the first cleaning immediately after removal of Primary plastic. This cleaning is now being applied to existing room surfaces. Take care to avoid water marks or other damage to surfaces.

Section 02 82 08 © 4/27/21 20046 WYNN L. WHIT

- B. Contractor's Testing: At the completion of the above cleaning visually inspect all surfaces. Reclean if any dust, debris, etc. is found. At completion of this inspection sweep entire Work Area including walls, ceilings, ledges, floors and other surfaces in the Work Area with exhaust from forced-air equipment (leaf blower with approximately 1 horsepower (745.7 watts) electric motor or equivalent). Do not direct forced-air equipment at any seal in any Critical Barrier. If any debris or dust is found repeat the cleaning. Continue this process until no debris dust or other material is found while sweeping of all surfaces with forced-air equipment.
 - 1. Cover carpeting in the work area with 6 mil (0.15 mm) polyethylene during Contractor's testing procedures. Seal plastic to baseboards with duct tape.
- C. Cleaning Carpeting: At the completion of cleaning of all surfaces except carpeting, HEPA vacuum carpeting designated to remain in Work Areas using a floor cleaning attachment adjusted so that rubber skirting is in contact with carpet surface. Use a passive (non-power brush type) floor attachment with rubber floor seals and adjustable above-floor height. Completely clean carpeting in one direction with each pass of the floor attachment overlapping the previous pass by one-half the attachment width. At the completion of one such cleaning, vacuum clean in the same manner in a direction at right angles to the initial cleaning. Perform a visual inspection of the carpet at the completion of cleaning, in accordance with inspection standards of the American Society for Testing and Material (ASTM) standard for visual inspections, ASTM E1368.
- **D. After a visual inspection**, again wait for a period of time long enough for the HEPA-filtered fan units operating in the work area to clean air of airborne asbestos fibers. Use oscillating fans as necessary to assure circulation of air in all parts of work areas during this period. Maintain pressure differential system in operation.

3.5 FINAL CLEANING:

- **A. Final Cleaning:** Carry out a final cleaning of all surfaces in the Work Area in the same manner as the previous cleaning.
- **B.** Contractor's Testing: At the completion of the above cleaning visually inspect all surfaces. Reclean if any dust, debris, etc. is found. At completion of this inspection sweep entire Work Area including walls, ceilings, ledges, floors and other surfaces in the Work Area with exhaust from forced air equipment (leaf blower with approximately 1 horsepower electric motor or equivalent). Do not direct forced air equipment at any seal in any critical barrier. If any debris or dust is found repeat the final cleaning. Continue this process until no debris dust or other material is found while sweeping of all surfaces with forced air equipment.
- **C. After a visual inspection**, again wait for a period of time long enough for the HEPA-filtered fan units operating in the work area to clean air of airborne asbestos fibers. Use oscillating fans as necessary to assure circulation of air in all parts of work areas during this period. Maintain pressure differential system in operation.

3.6 VISUAL INSPECTION:

A. After Final Cleaning Perform a Complete Visual Inspection of the entire Work Area including: all surfaces, ceiling, walls, floor, decontamination unit, all plastic sheeting, seals over ventilation openings, doorways, windows, and other openings; look for debris from any source, residue on surfaces, dust or other matter. During visual inspection sweep entire work area including walls, ceilings, ledges, floors, and other

Section 02 82 08

© 4/27/21 20046 WYNN L. WHII

Specifications 02 82 08-7

surfaces in the room with exhaust from forced air equipment (leaf blower with approximately 1 horsepower electric motor or equivalent). If any debris, residue, dust or other matter is found repeat final cleaning and continue decontamination procedure from that point. When the area is visually clean, and if after sweeping of all surfaces with leaf blower, no debris, residue, dust or other material is found, complete the certification at the end of this section. Visual inspection is not complete until confirmed in writing, on the certification, by Project Administrator.

- **B. Temporary lighting:** Provide a minimum of 100 foot candles (1075 Lumens / sq meter) of lighting on all surfaces in the areas to be subjected to visual inspection. Provide hand held lights providing 150 foot candles (1600 lumens / sq meter) at 4 feet (1.25 meters) capable of reaching all locations in work area.
- **C. Lifts:** Provide ladders, scaffolding, and lifts as required to provide access to all surfaces in the area to be subjected to visual inspection. Access is to allow touching of all surfaces.

3.7 CLEARANCE AIR SAMPLING BY OWNER (TEM):

- A. Transmission Electron Microscopy (TEM): After the work area is found to be visually clean by Contractor's inspection and testing, TEM air samples will be collected and analyzed by the Owner in accordance with the procedure for Transmission Electron Microscopy set forth in Part 1 of this section. Contractor shall contact Designer 48 hours prior to requesting TEM clearance air sampling.
 - 1. If Release Criteria are not met, repeat Final Cleaning and continue Decontamination procedure from that point.
 - 2. If Release Criteria are met, remove work area isolation in accordance with requirements of this section.
- **B.** 1. If Release Criteria are not met, repeat Final Cleaning and continue Decontamination procedure from that point.
 - 2. If Release Criteria are met, remove work area isolation in accordance with requirements of this section.

NOTE: The Contractor shall compensate the Owner for the costs of failed clearance sampling and associated fees, including but not limited to: laboratory analytical fees, shipping fees, air monitoring technician mileage, air monitoring technician time on site related to air monitoring, air monitoring technician travel time, air monitoring cassettes, per diem, lodging, and pump rental.

3.8 LOCK-BACK:

A. Encapsulation of substrate: Perform encapsulation of substrate or installation of spray-applied finishes or fireproofing, where required, before Removal of Work Area Isolation as specified below. Maintain Pressure Differential System in operation during encapsulation work.

3.9 REMOVAL OF WORK AREA ISOLATION:

- A. After all requirements of this section have been met:
 - 1. Shut down and remove the Pressure Differential System. Seal HEPA filtered fan units, HEPA vacuums and similar equipment with 6 mil (0.15 mm) polyethylene sheet and duct tape to form a tight seal at intake end before being moved from Work Area.
 - 2. Remove Personnel Decontamination Unit.
- 3. Remove the Critical Barriers separating the Work Area from the rest of the building. Remove any Section 02 82 08 © 4/27/21 20046 WYNN L. WHITE

Specifications 02 82 08-8

small quantities of residual material found upon removal of the plastic sheeting with wet wiping, HEPA filtered vacuum cleaners and local area protection. If significant quantities, as determined by the Designer, are found then the entire area affected shall be decontaminated as specified in Cleaning and Decontamination Procedures.

- 4. Remove all equipment, materials, debris from the work site.
- 5. Dispose of all asbestos-containing waste material as specified in Section "Disposal of Regulated Asbestos Containing Material".

4.0 SUBSTANTIAL COMPLETION OF ABATEMENT WORK:

- A. Abatement Work is Substantially Complete upon meeting the requirements of this section including submission of:
 - 1. Certificate of Visual Inspection.
 - 2. Receipts Documenting proper disposal as required by Section "Disposal of Regulated Asbestos-Containing Material".
 - 3. Punch list detailing repairs to be made and incomplete items.

4.1 CERTIFICATE OF VISUAL INSPECTION:

A. Following this section is a "Certificate of Visual Inspection". This certification is to be completed by the Contractor and certified by the Project Administrator. Submit completed Certificate with Application for Final Payment. Final payment will not be made until this Certification is executed.

END OF SECTION - 02 82 08

© 4/27/21 20046 WYNN L, WHITE

Specifications 02 82 08-9

CERTIFICATION OF VISUAL INSPECTION

In accordance with Section "Project Decontamination" the Contractor hereby certifies that he has visually inspected the Work Area (all surfaces including pipes, beams, ledges, walls, ceiling and floor, Decontamination Unit, sheet plastic, etc.) and has found no dust, debris or residue.

by: (Signature	_ Date
(Print Name)	_
(Print Title)	
PROJECT ADMINISTRATOR CERTIFICATION	
•	nas accompanied the Contractor on the Contractor's visual inspection gh and to the best of their knowledge and belief, the Contractor's
by: (Signature)	Date
(Print Name)	-
(Print Title)	

Specifications 02 82 13-1

SECTION 02 82 13 - RESILIENT FLOORING REMOVAL - ASBESTOS ABATEMENT:

PART 1 - GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division - 2 Specification Sections, apply to work of this section.

1.2 RELATED WORK SPECIFIED ELSEWHERE:

- **A.** Asbestos abatement project requirements to be completed prior to start of the work of this section are set forth in the following sections:
 - 1. Temporary Facilities Asbestos Abatement
 - 2. Temporary Pressure Differential & Air Circulation System
 - 3. Temporary Enclosures Complete Work Except Delete Floor Plastic.
 - 4. Regulated Areas
 - Worker Protection Asbestos abatement
 - 6. Respiratory Protection
 - 7. Decontamination Units
- **B.** Asbestos abatement project requirements to be completed at completion of the work of this section are set forth in the following sections:
 - 1. Project Decontamination

1.3 SUBMITTALS:

- **A. Before Start of Work:** Submit the following to the Designer for review. Do not start work until these submittals are returned with Designer's action stamp indicating that the submittal is returned for unrestricted use.
 - 1. Wetting Materials: Submit product data, use instructions and recommendations from manufacturer of wetting material (surfactant and/or removal encapsulant) intended for use. Include data substantiating that material complies with requirements.
 - 2. NESHAP Compliance Documentation: Submit manufacturer's documentation for removal encapsulants proposed for use that, to the extent required by this specification, the material, if used in accordance with manufacturer's instructions, will comply with the wetting requirements of National Emission Standard for Hazardous Pollutants (NESHAP) Asbestos Regulations (40 CFR 61, Subpart M).
 - 3. NESHAP Compliance Documentation: Submit written approval from the EPA NESHAP Coordinator, in compliance with applicable requirements of National Emission Standard for Hazardous Pollutants (NESHAP) Asbestos Regulations (40 CFR 61, Subpart M), for the use of shot/bead blast equipment for adhesive removal.
 - 4. Adhesive Removal Solvent: Submit product data, use instructions and recommendations from manufacturer of adhesive removal solvent intended for use. Include data substantiating that material complies with requirements.
- **B. Before Start of Work** submit the following to the Designer for review. Do not begin work until these submittals are returned with the Designer's action stamp indicating that the submittal has been' "Received Not Reviewed."
 - 1. Material Safety Data Sheet: Submit Material Safety Data Sheets, or equivalent, in accordance with the OSHA Hazard Communication Standard (29 CFR 1910.1200) for all materials proposed for use on the work including:

on the work including:

Section 02 82 13

© 4/27/21 20046 | WYNN L WHIT

- a. Surfactants.
- b. Adhesive Removal Solvents.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Wetting Materials: For wetting prior to disturbance of asbestos-containing materials use:
 - 1. Amended Water: Where amended water is used, provide water to which a surfactant has been added. Use a mixture of surfactant and water which results in wetting of the asbestos-containing material (ACM) and retardation of fiber release during disturbance of the material equal to or greater than that provided by the use of one ounce of a surfactant consisting of 50 percent polyoxyethylene ester and 50 percent polyoxyethylene ether mixed with five gallons (19 liters) of water.
 - 2. Removal Encapsulant: Where a removal encapsulant is used, provide a penetrating-type encapsulant designed specifically for removal of ACM. Use a material which results in wetting of the asbestos-containing material and retardation of fiber release during disturbance of the material equal to or greater than that provided by water amended with a surfactant consisting of one ounce of 50 percent polyoxyethylene ester and 50 percent polyoxyethylene ether mixed with five gallons (19 liters) of water.
- **B. Foam or Viscous Liquid:** Where foam or viscous liquid is used, provide material that contains no organic materials, is non-flammable, presents no physical hazard due to reactivity, presents no acute or chronic health hazard, and does not require special skills, knowledge, or equipment for application.
- C. Tile Adhesive Removal Solvent: Where tile adhesive removal solvent is used, provide a slow-drying solvent intended to remove tile adhesive. Provide material that is not flammable, does not create combustible vapors and has no significant inhalation hazard.
 - 1. Provide materials that have less than 250 g/l of volatile organic solvents (VOCs).
- **D. Polyethylene Sheet:** A single polyethylene film in the largest sheet size possible to minimize seams, 6.0 mil (0.15 mm) thick, clear, frosted, or black as indicated.
- **E. Polyethylene Sheet:** Provide flame resistant polyethylene film that conforms to requirements set forth by the National Fire Protection Association Standard 701, Small Scale Fire Test for Flame-resistant Textiles and Films. Provide largest size possible to minimize seams, 6.0 mil (0.15 mm) thick frosted or black as indicated.
- **F. Duct Tape:** Provide duct tape in 2 inch or 3 inch (50 or 75 mm) widths as indicated, with an adhesive formulated for use on sheet polyethylene.
- **G. Spray Cement:** Provide, in aerosol cans, spray adhesive which is formulated for use on sheet polyethylene. Provide materials that do not contain methylene chloride.
- **H. Disposal Bags:** Provide 6 mil (0.15 mm) thick leak-tight polyethylene bags labeled as required by Section 02084 Disposal of Regulated Asbestos-Containing Material.
- I. Fiberboard Drums: Provide heavy duty leak-tight fiberboard drums with tight sealing locking metal tops.
- **J. Steel Drums:** Provide leak-tight steel drums with tight-sealing locking metal tops.
- K. Injection Molded Plastic Drums: Provide leak-tight injection-molded plastic drums with tight sealing locking tops.

© 4/27/21 20046 WYNN L. WHILE

Section 02 82 13

Wynn L. White Consulting Engineers, Inc. (225) 761-9141

- L. Paper board Boxes: Provide heavy-duty corrugated paperboard boxes coated with plastic or wax to retard deterioration from moisture. Provide in sizes that will easily fit in disposal bags.
- М. Polyethylene Boxes: Provide heavy-duty polyethylene boxes. Provide leak-tight boxes or boxes in sizes that will easily fit in disposal bags.

2.2 PRIMARY RESILIENT FLOORING REMOVAL EQUIPMENT

A. **Manual Spades:**

- 1. Hand operated scraper/chisels with long handles and replaceable blades for removal of resilient
- 2. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products which may be incorporated in the Work include, but are not limited to, the following:

Crain Cutter Co., Inc. Various manual scrapers/strippers

156 So. Milpitas Blvd. Milpitas, CA 95035 408-946-6100

b. Beno J. Gundlach Company Various manual scrapers/strippers

P.O. Box 544 Belleville, IL 62222 618-233-1781

Roofing Equipment, Inc. **Taylor Tools** c. 11075 East 47th Avenue "Spud Bar" & other manual scrapers/strippers

> Denver, CO 80239 303-371-7667

d. Red Devil, Inc. "The Slam Scraper"

> 2400 Vauxhall Road Union, NJ 07083-1933

201-688-6900 or 800-4-A-DEVIL

В. **Powered Spades:**

- Long-handled scraper/chisels used in a full-standing position that have replaceable blades and are pneumatically or electrically-powered to move in a reciprocating (in and out) motion.
- 2. Provide powered spades that are equipped with pneumatic vents and piston seals that prevent compressed air or blow by from sweeping floor.
- 3. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products which may be incorporated in the Work include, but are not limited to, the following:

Aramsco "Air Powered Tile Removal System" a.

1655 Imperial Way - hose Thorofare, NJ 08086 - compressor 800-666-6933 - spade, chisel Equipment Development Co., Inc. "A-LR-5"

100 Thomas Johnson Drive

Frederick, MD 21701

301-663-1600 or 800-638-EDCO

C. **Stripper Machines:**

b.

- These are walking units with blades at the front, driven by electric motors, and move either in a reciprocating (in and out) or an oscillating orbital motion.
- 2. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products

Section 02 82 13

Resilient Flooring Removal - Asbestos Abatement

Specifications 02 82 13-4

which may be incorporated in the Work include, but are not limited to, the following:

Crain Cutter Co., Inc. No. 700 "Bearcat" Stripper

156 So. Milpitas Blvd. - without blades

Milpitas, CA 95035 - various blades available

408-946-6100

b. Beno J. Gundlach Company No. 500 P.O. Box 544 No. 525

> Belleville, IL 62222 618-233-1781

"The Big Rip-Off" C. Inventive Manufacturing

1440 South Seneca Wichita, KS 67213 316-267-2443

d. Palmer Distributing & Sales Co. Model 460 Model PG 101 P.O. Box 6327

> Glendale, CA 91225-0327 Model PG 102

818-244-7261 or 800-423-2733

e. Roofing Equipment, Inc. **Taylor Tools**

11075 East 47th Avenue Denver, CO 80239 303-371-7667

f. Warner Manufacturing No. 7079 Warner Floor Stripper

13435 Industrial Park Blvd. Minneapolis, MN 55441

612-559-4740 or 800-328-0606

D. **Rotary Cutters:**

2.

- Machine with rotating discs facing flat against the floor with spring-loaded cutters that follow the profile of the floor and removes soft resilient materials by cutting them into thin strips and scraping them from the floor.
 - Available Manufacturers: Subject to compliance with requirements, manufacturers offering products which may be incorporated in the Work include, but are not limited to, the following:

"Strip-Dek" fitted for connection to HEPA Critical Industries, Inc.

5815 Gulf Freeway Vac Houston, TX 77023

800-624-7030

2.3 THERMAL EQUIPMENT WITH AUTOMATIC CONTROL:

A. Thermal Equipment with Automatic Control:

- 1. Equipment utilizing controlled infrared radiant heat to make the resilient floor tiles and adhesive soft and pliable for removal.
- 2. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products which may be incorporated in the Work include, but are not limited to, the following:

Enviromethods, Inc. "Delta T" series a.

> P.O. Box 6151 Wolcott, CT 06716 203-879-5527

UAS Automation Systems, Inc. "ATR" (Automated Tile Removal) b.

4524 Parkway Commerce Blvd. series

Orlando, FL 32808

407/294-8551 or 800/969-8837

© 4/27/21 20046

02 82 13-5 Specifications

2.4 NOT USED

2.5 OTHER TECHNOLOGIES APPLIED TO THE WORK:

Rotary Grinders/Surfacers:

1. Machine with discs facing flat against the floor that removes hard materials with a grinding action.

2. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products which may be incorporated in the Work include, but are not limited to, the following:

a. Allen Engineering Corporation No. 021006 grinders; diamond (wet cut)

P.O. Box 819

with dust extraction kit

Paragould, AR 72451

- gasoline, electric, propane

501-236-7751 or 800-643-0095

EDCO grinders diamond (wet cut)

Equipment Development Co. Inc. 100 Thomas Johnson Drive

w/HEPA vac connectors

Frederick, MD 21701

models: SEC, 2EC, 2GC, 411

301-663-1600 or 800-638-EDCO

В. Surfacers/Planers/Scarifiers:

b.

b.

Machine with a series of small cutters freewheeling on axles mounted on a drum so that the cutters 1. contact the floor surface with a flailing action.

2. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products which may be incorporated in the Work include, but are not limited to, the following:

Allen Engineering Corporation

"Thunderbird 8" planer w/dust

P.O. Box 819

Aurand

extraction kit

Paragould, AR 72451

"Multi-Duty Planer" diamond head grinder with dust extraction kit

501-236-7751 or 800-643-0095

Handheld units (no vac)

1210 Ellis Street

Cincinnati, Ohio 45223

and small walking units

513-541-7200

Bartell Power Products

"Surface Preparation System"

- machine and

56 Harvester Avenue

cutter individually sold

Batavia, NY 14020

Handheld units (2" path, no vac)

models

716-344-0850 or 800-247-8577

SP86, SP86E

Walking units (8" path) with dust extractor

models B446, 436, 346

EDCO various Surfacers/Planers

d. Equipment Development Co. Inc.

with HEPA vacs

100 Thomas Johnson Drive Frederick, MD 21701

301-663-1600 or 800-638-EDCO

- models CPM 4, 8, CPU 10, 10C, 12

SASE Company e.

P.O. Box 81003

VON ARX various Surfacers/Scarifiers

Seattle, WA 98108

206-762-0744

PART 3 - EXECUTION

3.1 RESILIENT FLOOR COVERINGS:

Α. Pre-requisite activities: Before starting removal of ACM using the procedures of this section complete Section 02 82 13 © 4/27/21 20046

Section 02 82 13

Resilient Flooring Removal - Asbestos Abatement

Specifications 02 82 13-6

work of the following sections:

- 1. Temporary Facilities Asbestos Abatement
- 2. Temporary Pressure Differential & Air Circulation System
- 3. Temporary Enclosures Complete work except delete floor plastic.
- 4. Regulated Areas
- 5. Worker Protection Asbestos abatement
- **6.** Respiratory Protection
- 7. Decontamination Units
- **B. Preparation:** Prior to beginning the removal of any resilient floor covering complete the following:
 - **1.** Remove appliances and furniture from the work area.
 - 2. Where detergent is used, mix a detergent solution (16 ounces (0.5 liters) of liquid dishwashing detergent to 1 gallon (4 liters) of warm water) and pour into a garden sprayer.
- **C. Seal Floor Penetrations:** Before using wet methods to remove resilient flooring, seal openings, and penetrations in the floor to prevent water leakage.
- **D.** Remove Resilient Flooring: Use the three step process described in the following sections:
 - 1. First Step: Removal of Resilient Tile Floor Covering, and/or Removal of Resilient Sheet Flooring. This step involves removal of tiles or the wear layer of sheet flooring.
 - 2. Second Step: Removal of Heavy Residue of Adhesive and/or Removal of Residual Backing. This step involves the removal of the bulk of these residual materials.
 - **3.** Third Step: Removal of Adhesive Residue. After completion of the first two steps there will be a thin residue of adhesive left on the floor.
 - **4.** At the completion of all work, leave the substrate in such a state as to comply with all requirements and recommendations of manufacturer of replacement flooring.

3.2 STEP ONE

REMOVAL OF RESILIENT TILE FLOOR COVERING:

- A. Remove resilient tile floor covering using the following procedure:
 - General:
 - a. Remove binding strips or other restrictive molding from doorways, walls, etc. clean and dispose of as non-asbestos waste. Dispose of any materials that have glue or floor mastic on them as asbestos-containing waste.
 - 2. Wet Floor:
 - a. Wet floor with amended water, removal encapsulant, or detergent solution, so that entire surface is wet. Do not allow to puddle or run off to other areas. If a removal encapsulant is used, use in strict accordance with manufacturer's instructions. Cover with sheet polyethylene to allow humidity to release tile from floor. Allow time for water or removal encapsulant to loosen tiles prior to removal.
 - b. Keep floor continuously wet throughout removal operation.
 - c. Remove tiles using a manual or powered spade or stripping machine. Continuously mist floor in area where machine is working with amended water, removal encapsulant or detergent solution. Wet any debris generated as necessary to keep continuously wet. Keep floor where tile has been removed continuously wet until after completion of heavy adhesive residue removal.

Section 02 82 13 © 4/27/21 20046 WYNN L. WHI

3. Where Foam or Viscous Liquid is used:

- Distribute dry foam in a uniform manner over floor. Use sufficient powder to form 1 inch (25 mm) of foam. Wet powder to produce foam. Add additional powder and wet as necessary to maintain 1 inch (25 mm) of foam during the entire removal process.
- b. Remove tiles using a manual or powered spade or stripping machine. Add additional dry foam powder and wet as necessary to maintain 1 inch (25 mm) of foam during the entire removal process. Maintain layer of foam on floor where tile has been removed until after completion of heavy adhesive residue removal.

B. Debris and Waste

1. Dispose of all materials in accordance with Section "Disposal of Regulated Asbestos containing Material".

3.3 NOT USED

3.4 STEP TWO - REMOVAL OF HEAVY RESIDUE OF ADHESIVE:

A. Remove the heavy residue of adhesive left after removal of resilient tile flooring using the following procedure. If the residual adhesive is sufficiently thin that the mastic can be effectively removed, this step may be skipped and step three started.

1. Dampen Floor

- a. Dampen floor by misting with amended water, removal encapsulant, or detergent solution so that entire surface is wet. Do not allow to puddle or run off to other areas. If a removal encapsulant is used, use in strict accordance with manufacturer's instructions.
- b. Keep floor continuously damp throughout removal operation.
- 2. Where Foam or Viscous Liquid is used:
 - Add additional foam dry powder and wet as necessary to maintain 1 inch (25 mm) of foam during the entire removal process.

3. Adhesive Removal:

- Begin removal at a point farthest from the entrance to the work area. Work of this step may proceed concurrently with work of removal of tile.
- b. Remove heavy residue of adhesive backing. Continuously mist floor in area where machine is working with amended water, removal encapsulant or detergent solution. Wet any debris generated as necessary to keep continuously wet.

Disposal and Debris

a. Dispose of all materials in accordance with Section "Disposal of Regulated Asbestos Containing Material".

Page 7 of 9

- 5. Wet vacuum standing water with HEPA wet/dry vacuum.
- **6.** Mop floor with amended water, removal encapsulant, or liquid detergent solution to remove all debris and residue.

Section 02 82 13 © 4/27/21 20046 WYNN L. WHITE

- **7.** Continue the above steps until the adhesive is sufficiently reduced in thickness that it can be effectively removed.
- **8.** Start in the corner of the room farthest from the entrance door and moisten an area of the adhesive approximately 3 by 10 feet (1 m by 3 m) with amended water, removal encapsulant, or detergent solution. Wet scrape with a stiff-bladed wall or floor scraper removing ridges and any loose adhesives until only a thin smooth film remains. Where deposits are heavy or difficult to scrape, heat with a hot-air blower prior to scraping.
 - Dispose of all materials in accordance with Section 02084 Disposal of Regulated Asbestos Containing Material.
- 9. Wet vacuum standing water with HEPA wet/dry vacuum.
- **10.** Mop floor with amended water, removal encapsulant, or liquid detergent solution to remove all debris and residue.
- **11.** Continue the above steps until the adhesive is sufficiently reduced in thickness that it can be effectively removed.

3.5 NOT USED

3.6 STEP THREE - REMOVAL OF ADHESIVE RESIDUE:

A. After removal of resilient flooring and any heavy residue of adhesive, mastic, or backing material, in the previous step, remove all residue of adhesive from the floor using one of the methods described in the paragraphs below. Prior to beginning removal of adhesive residue, allow floor to dry after completion of the wet removal procedures used in previous steps. Begin removal at a point farthest from the entrance to the work area.

3.7 NOT USED

3.8 NOT USED

3.9 ADHESIVE SOLVENT:

- A. Adhesive: Where solvents are used, remove adhesive residue by using adhesive removal solvents. Use solvents in accordance with manufacturers' instructions. Saturate adhesive with removal solvent and allow adhesive to soften. Remove by scraping, wet sanding, or wet scrub with floor cleaning machine with abrasive pad. Provide worker protection as required by material safety data sheet (MSDS) for any material used.
 - Mop floor with removal solvent as required by manufacturer's directions as required to completely remove all residue of adhesive.
 - Clean Floor after completion of removal of ACM by wet mopping with amended water. Mop three times allowing a drying time between each mopping.
 - 3. Encapsulate cleaned floor with one coat of an encapsulant. Use an encapsulant that has been determined not to prevent the bond of new resilient flooring. Follow manufacturer's recommendations for new floor covering installation.
- 4. Dispose of all rags, plastic sheet, etc. in accordance with requirements of Section "Disposal of Section 02 82 13 © 4/27/21 20046 WYNN L WHITE

Section 02 82 13 Resilient Flooring Removal – Asbestos Abatement

Specifications 02 82 13-9

Regulated Asbestos-Containing Material".

B. Decontaminate Equipment: After the completion of all work, decontaminate all equipment and machinery used for work of this section. Accomplish decontamination as required by the section on Project Decontamination.

3.10 WORK AREA CLEARANCE:

A. After completion of all resilient flooring and adhesive removal work and prior to removal of critical barriers, decontamination units, and shut down of pressure differential and ventilation system; complete project decontamination and clearance in accordance with section "Project Decontamination."

END OF SECTION 02 82 13

© 4/27/21 20046 WYNN L, WHITE

02 82 35-1

SECTION 02 82 35 - DISPOSAL OF REGULATED ASBESTOS-CONTAINING MATERIAL

PART 1 - GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-2 Specification Sections, apply to work of this section.

1.2 RELATED WORK SPECIFIED ELSEWHERE:

- A. Worker protection requirements are set forth in Section Worker Protection Asbestos abatement
- **B. Section Codes, Regulations and Standards Asbestos Abatement** describes applicable federal, state and local regulations.

1.3 DESCRIPTION OF THE WORK:

A. This section describes the disposal of Regulated Asbestos-Containing Materials (RACM). Disposal includes packaging of Regulated Asbestos-Containing Materials. Disposal may be accomplished either by land filling or converting Regulated Asbestos Containing Materials to non Asbestos waste.

1.4 SUBMITTALS:

- **A. Before Start of Work:** Submit the following to the Designer for review. Do not start work until these submittals are returned with Designer's action stamp indicating that the submittal is returned for unrestricted use.
 - Copy of state or local license for waste hauler.
 - 2. Name and address of landfill where Regulated Asbestos Containing Materials are to be buried. Include contact person and telephone number.
 - 3. Name and address of processor where Regulated Asbestos-Containing Materials are to be processed into non-asbestos waste if conversion of waste is the disposal method used. Include contact person and telephone number. Also provide the following information about the process and operation used by the processor:
 - Results of start-up performance testing and performance testing for last 90 days including operating parameters, feed characteristics, and analysis of output materials.
 - Results of composite analysis required during initial 90 days of operation and results of composite analysis of monthly product composite samples for last 90 days.
 - Results of continuous monitoring and logs of process operating parameters for the initial 90 days and last 90 days of operation.
 - d. A description of any deviation from the operating parameters established during performance testing, the duration of the deviation, and steps taken to correct the deviation.
 - e. Product data on process to be used
 - 4. Chain of Custody form and form of waste manifest proposed
 - 5. Sample of disposal bag and any added labels to be used.

© 4/27/21 20046 WYNN L, WHIT

- В. On a weekly basis submit copies of all manifests and disposal site receipts to Designer.
- C. Waste Shipment Record: Maintain a waste shipment record as required by the NESHAP regulation which indicates the waste generator, transporter, and disposal site, and which describes the nature, size, type of container, and form of asbestos waste. Submit to Designer within 35 days of departure from building.

PART 2 - PRODUCTS:

2.1 MATERIALS

- A. Disposal Bags: Provide 6 mil (0.15 mm) thick leak-tight polyethylene bags labeled with three labels with text as follows:
 - 1. First Label: Provide in accordance with 29 CFR 1910.1200(f) of OSHA's Hazard Communication standard:

DANGER CONTAINS ASBESTOS FIBERS AVOID CREATING DUST CANCER AND LUNG DISEASE HAZARD BREATHING AIRBORNE FIBERS IS HAZARDOUS TO YOUR HEALTH

2. Second Label: Provide in accordance with U. S. Department of Transportation regulation on hazardous waste marking. 49 CFR parts 171 and 172. Hazardous Substances **RQ-ASBESTOS WASTE**

> CLASS 9 NA2212-PG III

3. Third Label: Provide the name of the waste generator (Owner's name), the location from which the waste was generated and the names and addresses of the contractor and transporter. This label must be durable, able to repel dirt and moisture (e.g., permanent marker). Label must be placed directly on disposal bag(s) in a legible format. Peel and stick type labels are expressly prohibited.

2.2 VITRIFICATION:

- A. If conversion is used, convert Regulated Asbestos-Containing Materials to non-asbestos waste by thermal conversion in a process including the following principal elements. Comply with all EPA and DOT requirements for asbestos waste until the waste is converted:
 - 1. Receiving and storage: areas that are maintained as contained controlled areas isolated by physical barriers and a pressure differential
 - 2. Melting: process that is intrinsically safe in that it will not allow unconverted asbestos to appear in the final product under any circumstances
- B. Processor: Use a processor that meets all the requirements of the EPA NESHAP regulation for an operation that converts regulated asbestos-containing material and asbestos-containing waste material into non-asbestos (asbestos-free) material as set forth in 40 CFR 61 Sub-part A and M section 61.155
- C. Available Processors: Subject to compliance with requirements, providers of processes include, but are © 4/27/21 20046 Section 02 82 35

Section 02 82 35

Disposal of Regulated Asbestos Containing Material

Specifications 02 82 35-3

not limited to, the following:

- D. Processors: Subject to compliance with requirements, utilize process provided by one of the Following:
 - GTS Duratek
 8955 Guilford Rd, Suite 200
 Columbia, MD 21045
 (800) 638-3838
 - 2. Penberthy Electromelt 631 So. 96th Street Seattle, WA 98108

PART 3 - EXECUTION

3.1 SEQUENCE

- A. Comply with the following sections during all phases of this work:
 - Section Worker Protection Asbestos Abatement
 - Section Respiratory Protection

3.2 GENERAL:

- **A. All waste** is to be hauled by a waste hauler with all required licenses from all state and local authority with jurisdiction.
- **B.** Liquid waste: Mix all liquid asbestos-containing waste or asbestos contaminated waste with a bladeable material so that it forms a bladeable (non-liquid) form, and have the concurrence of the landfill operator prior to disposal.
- C. Load all adequately wetted Regulated Asbestos-Containing Material in disposal bags or leak-tight containers. All materials are to be contained in one of the following:
 - 1. Two 6 mil (0.15 mm) disposal bags or
 - 2. Two 6 mil (0.15 mm) disposal bags and a fiberboard drum or
 - 3. Sealed steel drum with no bag
- **D. Protect interior of truck** or dumpster with Critical and Primary Barriers as described in Section "Temporary Enclosures".
- E. Carefully load containerized waste in fully enclosed dumpsters, trucks or other appropriate vehicles for transport. Exercise care before and during transport, to insure that no unauthorized persons have access to the material.
- **F.** Warning Signs: During loading and unloading mark dumpsters, receptacles and vehicles with a sign complying with requirements of the EPA NESHAP regulation (40 CFR Part 61), in a manner and location that a person can read the following legend:

DANGER
ASBESTOS DUST HAZARD
CANCER AND LUNG DISEASE HAZARD
Authorized Personnel Only

G. Do not store containerized materials outside of the Work Area. Take containers from the Work Area directly to a sealed truck or dumpster.

Section 02 82 35 © 4/27/21 20046

- H. Do not transport disposal bagged materials on open trucks. Label drums with same warning labels as bags. Uncontaminated drums may be reused. Treat drums that have been contaminated as Regulated Asbestos-Containing Material and dispose of in accordance with this specification.
- Advise the landfill operator or processor, at least ten days in advance of transport, of the quantity of material to be delivered.
- J. At disposal site unload containerized waste:
 - 1. At a disposal site, sealed plastic bags may be carefully unloaded from the truck. If bags are broken or damaged, return to work site for rebagging. Clean entire truck and contents using procedures set forth in section Project Decontamination.
 - 2. At a processing site truck and loading dock are arranged as a controlled work area and containerized waste is transferred to storage area by site personnel. All bags including broken ones will be transferred. Clean truck, using procedures set forth in section Project Decontamination.
- K. Retain receipts from landfill or processor for materials disposed of.
- **L. At completion of hauling** and disposal of each load submit copy of waste manifest, chain of custody form, and landfill receipt to Designer.

END OF SECTION - 02 82 35

© 4/27/21 20046 WYNN L, WHITE

02 82 70-1

SECTION 02 82 70 - CONTRACT CLOSEOUT - ASBESTOS ABATEMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 2 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for contract closeout including, but not limited to, the following:
 - 1. Inspection procedures.
 - 2. Project record document submittal.
 - 3. Submittal of warranties.
 - Final cleaning.

1.3 SUBSTANTIAL COMPLETION

- A. Preliminary Procedures: Before requesting inspection for certification of Substantial Completion, complete the following. List exceptions in the request.
 - 5. In the Application for Payment that coincides with, or first follows, the date Substantial Completion is claimed, show 100 percent completion for the portion of the Work claimed as substantially complete.
 - Include supporting documentation for completion as indicated in these Contract Documents a. and a statement showing an accounting of changes to the Contract Sum.
 - b. If 100 percent completion cannot be shown, include a list of incomplete items, the value of incomplete construction, and reasons the Work is not complete.
 - 6. Advise the Owner of pending insurance changeover requirements.
 - 7. Submit specific warranties, workmanship bonds, maintenance agreements, final certifications, and similar documents.
 - 8. Obtain and submit releases enabling the Owner unrestricted use of the Work and access to services and utilities. Include occupancy permits, operating certificates, and similar releases.
 - 9. Submit record drawings, maintenance manuals, final project photographs, damage or settlement surveys, property surveys, and similar final record information.
 - 10. Make final changeover of permanent locks and transmit keys to the Owner. Advise the Owner's personnel of changeover in security provisions.
 - 11. Complete startup testing of systems and instruction of the Owner's operation and maintenance personnel. Discontinue and remove temporary facilities from the site, along with mockups, construction tools, and similar elements.
 - 12. Complete final cleanup requirements, including touch up painting.

- **13.** Touch up and otherwise repair and restore marred, exposed finishes.
- B. Inspection Procedures: On receipt of a request for inspection, the Designer will either proceed with inspection or advise the Contractor of unfilled requirements. The Designer will prepare the Certificate of Substantial Completion following inspection or advise the Contractor of construction that must be completed or corrected before the certificate will be issued.
 - 1. The Designer will repeat inspection when requested and assured that the Work is substantially complete.
 - 2. Results of the completed inspection will form the basis of requirements for final acceptance.

1.4 FINAL ACCEPTANCE

Specifications

- **A. Preliminary Procedures:** Before requesting final inspection for certification of final acceptance and final payment, complete the following. List exceptions in the request.
 - Submit the final payment request with releases and supporting documentation not previously submitted and accepted. Include insurance certificates for products and completed operations where required.
 - 2. Submit an updated final statement, accounting for final additional changes to the Contract Sum.
 - 3. Submit a certified copy of the Designer's final inspection list of items to be completed or corrected, endorsed and dated by the Designer. The certified copy of the list shall state that each item has been completed or otherwise resolved for acceptance and shall be endorsed and dated by the Designer.
 - **4.** Submit final meter readings for utilities, a measured record of stored fuel, and similar data as of the date of Substantial Completion or when the Owner took possession of and assumed responsibility for corresponding elements of the Work.
 - 5. Submit consent of surety to final payment.
 - **6.** Submit a final liquidated damages settlement statement.
 - 7. Submit evidence of final, continuing insurance coverage complying with insurance requirements.
- **B.** Reinspection Procedure: The Designer will reinspect the Work upon receipt of notice that the Work, including inspection list items from earlier inspections, has been completed, except for items whose completion is delayed under circumstances acceptable to the Designer.
 - 1. Upon completion of reinspection, the Designer will prepare a certificate of final acceptance. If the Work is incomplete, the Designer will advise the Contractor of Work that is incomplete or of obligations that have not been fulfilled but are required for final acceptance.
 - 2. If necessary, reinspection will be repeated.

1.5 RECORD DOCUMENT SUBMITTALS

Section 02 82 70

A. General: Do not use record documents for construction purposes. Protect record documents from deterioration and loss in a secure, fire-resistant location. Provide access to record documents for the Designer's reference during normal working hours.

© 4/27/21 20046



Specifications

- B. Record Drawings: Maintain a clean, undamaged set of blue or black line white-prints of Contract Drawings and Shop Drawings. Mark the set to show the actual installation where the installation varies substantially from the Work as originally shown. Mark which drawing is most capable of showing conditions fully and accurately. Where Shop Drawings are used, record a cross-reference at the corresponding location on the Contract Drawings. Give particular attention to concealed elements that would be difficult to measure and record at a later date.
 - **1.** Mark record sets with red erasable pencil. Use other colors to distinguish between variations in separate categories of the Work.
 - Mark new information that is important to the Owner but was not shown on Contract Drawings or Shop Drawings.
 - 3. Note related change-order numbers where applicable.
 - **4.** Organize record drawing sheets into manageable sets. Bind sets with durable-paper cover sheets; print suitable titles, dates, and other identification on the cover of each set.
- C. Record Specifications: Maintain one complete copy of the Project Manual, including addenda. Include with the Project Manual one copy of other written construction documents, such as Change Orders and modifications issued in printed form during construction.
 - 1. Mark these documents to show substantial variations in actual Work performed in comparison with the text of the Specifications and modifications.
 - **2.** Give particular attention to substitutions and selection of options and information on concealed construction that cannot otherwise be readily discerned later by direct observation.
 - 3. Note related record drawing information and Product Data.
 - **4.** Upon completion of the Work, submit record Specifications to the Designer for the Owner's records.
- **D. Record Product Data:** Maintain one copy of each Product Data submittal. Note related Change Orders and markup of record drawings and Specifications.
 - 1. Mark these documents to show significant variations in actual Work performed in comparison with information submitted. Include variations in products delivered to the site and from the manufacturer's installation instructions and recommendations.
 - **2.** Give particular attention to concealed products and portions of the Work that cannot otherwise be readily discerned later by direct observation.
 - Upon completion of markup, submit complete set of record Product Data to the Designer for the Owner's records.
- E. Miscellaneous Record Submittals: Refer to other Specification Sections for requirements of miscellaneous record keeping and submittals in connection with actual performance of the Work. Immediately prior to the date or dates of Substantial Completion, complete miscellaneous records and place in good order. Identify miscellaneous records properly and bind or file, ready for continued use and reference. Submit to the Designer for the Owner's records.

Section 02 82 70 © 4/27/21 20046 WYNN L, WHIT

Specifications 02 82 70-4

All submittals required for project closeout shall be electronic format, latest version of Microsoft Word, Microsoft Excel, or Adobe Acrobat, and transmitted electronically (via email or CD-ROM).

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION

3.1 FINAL CLEANING

- A. General: The General Conditions require general cleaning during construction. Regular site cleaning is included in Division 1 Section "Construction Facilities and Temporary Controls." The cleaning in this Section is in addition to cleaning which is part of decontamination work. This section is intended to return the facility to the Owner in presentable condition.
- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to the condition expected in a normal, commercial building cleaning and maintenance program. Comply with manufacturer's instructions.
 - 1. Complete the following cleaning operations before requesting inspection for certification of Substantial Completion.
 - Remove labels that are not permanent labels. a.
 - b. Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compounds and other substances that are noticeable vision-obscuring materials.
 - Replace chipped or broken glass and other damaged transparent materials. C.
 - d. Clean exposed exterior and interior hard-surfaced finishes to a dust-free condition, free of stains, films, and similar foreign substances. Restore reflective surfaces to their original condition. Leave concrete floors broom clean. Vacuum carpeted surfaces.
 - Wipe surfaces of mechanical and electrical equipment. Remove excess lubrication and other e. substances. Clean plumbing fixtures to a sanitary condition. Clean light fixtures and lamps.
 - f. Clean the site, including landscape development areas, of rubbish, litter, and other foreign substances. Sweep paved areas broom clean; remove stains, spills, and other foreign deposits. Rake grounds that are neither paved nor planted to a smooth, even-textured surface.
- C. Removal of Protection: Remove temporary protection and facilities installed for protection of the Work during construction.
- D. Compliance: Comply with regulations of authorities having jurisdiction and safety standards for cleaning. Do not burn waste materials. Do not bury debris or excess materials on the Owner's property. Do not discharge volatile, harmful, or dangerous materials into drainage systems. Remove waste materials from the site and dispose of lawfully.
 - 1. Where extra materials of value remain after completion of associated Work, they become the Owner's property. Dispose of these materials as directed by the Owner.

END OF SECTION 02 82 70

Wynn L. White Consulting Engineers, Inc. (225) 761-9141

EMPLOYEE TRAINING:

List each person required to be trained under *LAC 33:III.2721.A.1-3* and for supervisors who direct workers who may disturb ACM. **Note:** all members of its custodial and maintenance staff who may work in a building that contains ACBM, whether or not they are required to disturb ACBM, shall receive **at least two hours of awareness training** within 60 days after commencement of employment; and staff who conduct any activities that will result in disturbance of 3 square or linear feet of ACBM shall receive **14 hours of additional training**. The following information must be provided for each employee trained. *(LAC 33:III.2725.C)* Attach behind Section G, Part I.

Name	Job Title	Date of Training Completed	Location of Training	Trainer/ Trainer Provider	Number of Hours Completed
See attached training sign in sheets					

Custodian In-Service 8/28/24

Location	School Name	Custodian Name Print	Signature
001	S P ARNETT MIDDLE		
002	BARBE ELEMENTARY		
003	A. M. BARBE HIGH		
004	BELL CITY HIGH	Sherry Abshire	Sundan
005	LEBLEU SETTLEMENT ELEMENTARY		0
006	BRENTWOOD ELEMENTARY		4
009	J.D. CLIFTON ELEMENTARY	Paddlet	
010	COLLEGE OAKS ELEMENTARY	(4	
011	D.A. COMBRE ELEMENTARY	Sten Athal	STEUPN ALAM
012	T.S. COOLEY ELEMENTARY	Brenda Kaufman	Brenda Kaulman
013	DEQUINCY PRIMARY		()
014	DEQUINCY HIGH	Alesia Hollie	Desia Fales
015	DEQUINCY MIDDLE		
016	DOLBY ELEMENTARY	Daraspan Walker	10-5
018	FAIRVIEW ELEMENTARY		(
019	FRASCH ELEMENTARY	Wandy Granque	Wolldy and Sen
023	HENNING ELEMENTARY		
024	HENRY HEIGHTS ELEMENTARY		
025	SAM HOUSTON HIGH		
026	IOWA HIGH		
027	J.J. JOHNSON ELEMENTARY		
028	KAUFMAN ELEMENTARY		
029	KENNEDY ELEMENTARY		
030	E.K. KEY ELEMENTARY		
031	L.C./BOSTON HIGH		_
d33	LAGRANGE SENIOR HIGH	Robin Tezeno	Columbia
034	W.W. LEWIS MIDDLE	Lus Orling	<u> </u>
035	LEBLANC MIDDLE		
036	MAPLEWOOD MIDDLE	Carlyn Drust	Cowlyn Dank
038	MOLO MIDDLE		
039	MOSS BLUFF ELEMENTARY	Mancalant	
040	MOSS BLUFF MIDDLE	1,10	
042	NELSON ELEMENTARY		
043	OAK PARK ELEMENTARY		
044	OAK PARK MIDDLE		

LeBlen Settlement Michelle oneal Mu Go

School Name	Custodian Name Print	Signature
CYPRESS COVE ELEM	GINA WATER	Sim Waler
PRIEN LAKE ELEMENTARY	sadie Sonnier	Sadi Som
ST. JOHN ELEMENTARY		
STARKS HIGH		
SULPHUR HIGH	·	
VINCENT SETTLEMENT		
R.W. VINCENT ELEMENTARY		
VINTON ELEMENTARY		Martin 1
VINTON HIGH	Michael Partin Pagne	7. Janlin
VINTON MIDDLE	TESSE Illiams Laterya Hardins	Obsane Hayen Jene Will
WASHINGTON/MARION HIGH		Mr.
WATKINS ELEMENTARY	This Soul	China
J.I. WATSON MIDDLE	Amancla Bichard	Brand Riches
PEARL WATSON ELEMENTARY	1	
S.J. WELSH MIDDLE		
WESTERN HEIGHTS ELEMENTARY	4	4
WESTLAKE HIGH	Jasor Thibatian	40 2
WESTWOOD ELEM		
FK WHITE MIDDLE	Allison Wool Ridy	(Aller Worn
RALPH WILSON ELEM	. 90	
GILLIS ELEMENTARY		
DROST SPECIAL SCHOOL		
BRENDA HUNTER HEADSTART CENTER	Leneil Murphy	Phi a
DEQUINCY ELEMENTARY	Alfreda J. Green	Wefull Green
MAPLEWOOD ELEMENTARY		
IOWA MIDDLE SCHOOL		
SULPHUR HIGH 9TH GRADE CAMPUS		
	Tony Griffin	Iny Lattin
college T.I.	Jason Minor	Jason mini
College 5+	Kenin Anderson	Koundshiele
SH South Grade	Kathy Fay IX	Kath Tauch
	3	
	CYPRESS COVE ELEM PRIEN LAKE ELEMENTARY ST. JOHN ELEMENTARY STARKS HIGH SULPHUR HIGH VINCENT SETTLEMENT R.W. VINCENT ELEMENTARY VINTON ELEMENTARY VINTON HIGH VINTON MIDDLE WASHINGTON/MARION HIGH WATKINS ELEMENTARY J.I. WATSON MIDDLE PEARL WATSON ELEMENTARY S.J. WELSH MIDDLE WESTERN HEIGHTS ELEMENTARY WESTLAKE HIGH WESTWOOD ELEM FK WHITE MIDDLE RALPH WILSON ELEM GILLIS ELEMENTARY DROST SPECIAL SCHOOL BRENDA HUNTER HEADSTART CENTER DEQUINCY ELEMENTARY IOWA MIDDLE SCHOOL SULPHUR HIGH 9TH GRADE CAMPUS	CYPRESS COVE ELEM PRIEN LAKE ELEMENTARY ST. JOHN ELEMENTARY STARKS HIGH SULPHUR HIGH VINCENT SETTLEMENT R.W. VINCENT ELEMENTARY VINTON ELEMENTARY VINTON MIDDLE WASHINGTON/MARION HIGH WATKINS ELEMENTARY J.I. WATSON MIDDLE PEARL WATSON ELEMENTARY WESTERN HEIGHTS ELEMENTARY WESTLAKE HIGH WESTWOOD ELEM FK WHITE MIDDLE RALPH WILSON ELEM GILLIS ELEMENTARY DROST SPECIAL SCHOOL BRENDA HUNTER HEADSTART CENTER DEQUINCY ELEMENTARY MAPLEWOOD ELEMENTARY

Custodian In-Service 8/28/24 Signature Location School Name Custodian Name Print 001 S P ARNETT MIDDLE BARBE ELEMENTARY 002 003 A. M. BARBE HIGH 004 BELL CITY HIGH 005 LEBLEU SETTLEMENT ELEMENTARY Rogald Colesine Cort OBria Replan 006 BRENTWOOD ELEMENTARY J.D. CLIFTON ELEMENTARY 009 COLLEGE OAKS ELEMENTARY 010 D.A. COMBRE ELEMENTARY 011 T.S. COOLEY ELEMENTARY 012 **DEQUINCY PRIMARY** 013 014 **DEOUINCY HIGH DEQUINCY MIDDLE** 015 DOLBY ELEMENTARY 016 018 FAIRVIEW ELEMENTARY 019 FRASCH ELEMENTARY 023 HENNING ELEMENTARY 024 HENRY HEIGHTS ELEMENTARY 025 SAM HOUSTON HIGH 026 IOWA HIGH 027 J.J. JOHNSON ELEMENTARY 028 KAUFMAN ELEMENTARY KENNEDY ELEMENTARY 029 030 E.K. KEY ELEMENTARY 031 L.C./BOSTON HIGH 833 LAGRANGE SENIOR HIGH 034 W.W. LEWIS MIDDLE LEBLANC MIDDLE 035 MAPLEWOOD MIDDLE 036 MOLO MIDDLE 038 MOSS BLUFF ELEMENTARY 039 MOSS BLUFF MIDDLE 040 042 NELSON ELEMENTARY 043 OAK PARK ELEMENTARY 044 OAK PARK MIDDLE

Location	School Name	Custodian Name Print	Signature
045	CYPRESS COVE ELEM	Sandra Burk	Sandra Bud
046	PRIEN LAKE ELEMENTARY		
050	ST. JOHN ELEMENTARY	Mirsten Jordan	Kirsten Jorden
051	STARKS HIGH		O .
052	SULPHUR HIGH		
053	VINCENT SETTLEMENT	Latavian collins	Lagarian collins
054	R.W. VINCENT ELEMENTARY		
055	VINTON ELEMENTARY	Kaytlin Short	
056	VINTON HIGH		
057	VINTON MIDDLE		
058	WASHINGTON/MARION HIGH		
059	WATKINS ELEMENTARY		
060	J.I. WATSON MIDDLE	TAMMY GUSDAND	Jaman Gas Del
061	PEARL WATSON ELEMENTARY	Anthony Ti	(dollers
062	S.J. WELSH MIDDLE	Charlen Warsh	1 / Rely Mul
063	WESTERN HEIGHTS ELEMENTARY		
064	WESTLAKE HIGH		
065	WESTWOOD ELEM	Jacqueline B. Pet	Darl BAD
066	FK WHITE MIDDLE		/
067	RALPH WILSON ELEM	Carlinelan	Early Ken
068	GILLIS ELEMENTARY	Drongley + orge	Marchen Larger
071	DROST SPECIAL SCHOOL) . / C	
073	BRENDA HUNTER HEADSTART CENTER		
081	DEQUINCY ELEMENTARY		
082	MAPLEWOOD ELEMENTARY		
126	IOWA MIDDLE SCHOOL		
152	SULPHUR HIGH 9TH GRADE CAMPUS	1	1
	CWEA	Chevonne laday	July 1
	Spec elementry	Jerry Andread	Teres andor
	J.D, Cinton	TROY DAVIS	Huy Day
	CXI	Sesemie Grallen	10) and I

Custodian In-Service 8/28/24

Location	School Name	Custodian Name Print	Signature
001	S P ARNETT MIDDLE		
002	BARBE ELEMENTARY	Norman Ceasar	Nemu Cen
003	A. M. BARBE HIGH	Brandal Coleman	Bome Cham
004	BELL CITY HIGH		
005	LEBLEU SETTLEMENT ELEMENTARY		
006	BRENTWOOD ELEMENTARY		
009	J.D. CLIFTON ELEMENTARY	TROYOFILLUS	1 kg Dais
010	COLLEGE OAKS ELEMENTARY	/	0
011	D.A. COMBRE ELEMENTARY		
012	T.S. COOLEY ELEMENTARY		
013	DEQUINCY PRIMARY		
014	DEQUINCY HIGH		
015	DEQUINCY MIDDLE		
016	DOLBY ELEMENTARY		
018	FAIRVIEW ELEMENTARY	Rox Ann Clark	Rox and Clack
019	FRASCH ELEMENTARY	0	01.
023	HENNING ELEMENTARY	YOP VINCENT	Top lunt
024	HENRY HEIGHTS ELEMENTARY	•	U
025	SAM HOUSTON HIGH	Mary Dove	Mary Love
026	IOWA HIGH	Jung / R. D.	Jalup -
027	J.J. JOHNSON ELEMENTARY	1/-100	Varesset Laves
028	KAUFMAN ELEMENTARY		
029	KENNEDY ELEMENTARY		
030	E.K. KEY ELEMENTARY		
031	L.C./BOSTON HIGH	Bonah CDD	^
d33	LAGRANGE SENIOR HIGH	Kyprell Buts	Russell Bups
034	W.W. LEWIS MIDDLE		
035	LEBLANC MIDDLE	Λ.	
036	MAPLEWOOD MIDDLE	Rangle 2 Hollie	
038	MOLO MIDDLE	100000000000000000000000000000000000000	
039	MOSS BLUFF ELEMENTARY	Serita in James	Sentrage
040	MOSS BLUFF MIDDLE		
042	NELSON ELEMENTARY		
043	OAK PARK ELEMENTARY	Brandi Rosa move	Bradi Rosems
044	OAK PARK MIDDLE	Theo Edwards	no Edwar

Location	School Name	Custodian Name Print	Signature
D45	CYPRESS COVE ELEM	Sharla Durio	Sharla Durret
 046	PRIEN LAKE ELEMENTARY		
050	ST. JOHN ELEMENTARY		
051	STARKS HIGH		
052	SULPHUR HIGH	Jam & Bench Vous	and While
053	VINCENT SETTLEMENT	Veronicafardy	Demice Hard
054	R.W. VINCENT ELEMENTARY	J	
055	VINTON ELEMENTARY		
056	VINTON HIGH		
057	VINTON MIDDLE		
058	WASHINGTON/MARION HIGH	John L WM	
059	WATKINS ELEMENTARY		
060	J.I. WATSON MIDDLE		112
061	PEARL WATSON ELEMENTARY	Bluit M. THOIGHS	11/1/1/1/1/
062	S.J. WELSH MIDDLE		
063	WESTERN HEIGHTS ELEMENTARY	* Loretha brignac	Toretha Brige
064	WESTLAKE HIGH		/
065	WESTWOOD ELEM		
066	FK WHITE MIDDLE	4.4	
067	RALPH WILSON ELEM		
068	GILLIS ELEMENTARY		
071	DROST SPECIAL SCHOOL		
073	BRENDA HUNTER HEADSTART CENTER		
081	DEQUINCY ELEMENTARY		
082	MAPLEWOOD ELEMENTARY		
126	IOWA MIDDLE SCHOOL		
152	SULPHUR HIGH 9TH GRADE CAMPUS		, , , , , , , , , , , , , , , , , , , ,
	Positive Connection	Tennify Floore	fulfor
	CPAS EAST	Sharon Lenny	Sharon (Senry
	CIT	Keithen Cologo	helther Censer O
	CPAS WEST/TAKE DOS	+ HOMAN HOME	Aur 16
	/		1

Section G Part II

SURVEILLANCE

List each time that a periodic surveillance under *LAC 33:III.2721.B* is performed. (*LAC 33:III.2723.D*)

Date of	Name	Louisiana	Expiration	Changes in Conditions
Periodic	(Printed or Typed)	Accreditation	Date	
Surveillance		No.		
See archive data				
7/11/2024	Bakari Weiss	FI184724	2/12/2025	See report
1/30/2025	Todd Peterson	MI165930	3/22/2025	See report

Calcasieu Parish School Board Periodic Surveillance – January 2025

For

Assessment (1618 Mills)

February 4, 2025

25007

Prepared by:

Savannah Rayburn

Wynn L. White Consulting Engineers, Inc.

P.O. Box 83527

Baton Rouge, LA 70884-3527

(225) 761-9141

(225) 761-4450 Fax

I. Introduction

A. Summary

The visual periodic surveillance found non-friable materials in the facility. The non-friable floor tile/mastic is in good overall condition and may remain in the facility until its condition deteriorates or is affected by renovation or demolition.

B. Background

The Asbestos Hazard Emergency Response Act (AHERA) became law on October 12, 1986. The law required Environmental Protection Agency (EPA) to develop regulations addressing asbestos in schools. The Louisiana Legislature enacted Title 33, Environmental Quality, Part III Air, Chapter 27 Asbestos-Containing Materials in Schools and Public Buildings Regulations on September 20, 1989. The Louisiana act follows the AHERA regulations and applies to State owned or leased buildings. This periodic surveillance is performed and prepared according to AHERA and Louisiana guidelines.

II. Purpose

The purpose is to locate and assess ACBM. Todd Peterson (MI165930) performed the periodic surveillance on January 30, 2025.

III. Condition of Material

The non-friable ACBM is in good overall condition.

IV. Conclusion

The visual periodic surveillance found non-friable materials in the facility. The materials may remain in the facility until its condition deteriorates or is affected by renovation or demolition.

Asbestos Periodic Surveillance

CONSULTING ENGINEERS, INC. P.O.B. 83527 Baton Rouge, LA 70884 (225) 761-9141 Form 4.9.63.14

Campus Name: Assessment (1618 Mills)

Campus Number: 141 Project Number: 25007

Inspector Name: Took (Leteral Project Number: 25007)

	1 4 2 3 2 3 2 3	
Building Number	Comments	
210	NA	· ·
211	F.T. in good condition.	·
212	NA	la de la de
213	NIA	
214	NA	A soul
215	NIA	
216	NA	
217	NIA	
218	NIA	-3-
219	NA	
220	NA	
	· · · · · · · · · · · · · · · · · · ·	*
4	e No new buildings on site.	1
4	No new buildings on site. No ANP plan on site as per Admin. No principal.	,
		105
Signature:	Date: 01-70-25	Sheet <u>1</u> of <u>1</u>

Calcasieu Parish School Board Periodic Surveillance – July 2024

For

Assessment (1618 Mills)

July 19, 2024

24007

Prepared by:

Savannah Rayburn

Wynn L. White Consulting Engineers, Inc.

P.O. Box 83527

Baton Rouge, LA 70884-3527

(225) 761-9141

(225) 761-4450 Fax

I. Introduction

A. Summary

The visual periodic surveillance found non-friable materials in the facility. The non-friable floor tile/mastic is in good overall condition and may remain in the facility until its condition deteriorates or is affected by renovation or demolition.

B. Background

The Asbestos Hazard Emergency Response Act (AHERA) became law on October 12, 1986. The law required Environmental Protection Agency (EPA) to develop regulations addressing asbestos in schools. The Louisiana Legislature enacted Title 33, Environmental Quality, Part III Air, Chapter 27 Asbestos-Containing Materials in Schools and Public Buildings Regulations on September 20, 1989. The Louisiana act follows the AHERA regulations and applies to State owned or leased buildings. This periodic surveillance is performed and prepared according to AHERA and Louisiana guidelines.

II. Purpose

The purpose is to locate and assess ACBM. Bakari Weiss performed the periodic surveillance on July 11, 2024.

III. Condition of Material

The non-friable ACBM is in good overall condition.

IV. Conclusion

The visual periodic surveillance found non-friable materials in the facility. The materials may remain in the facility until its condition deteriorates or is affected by renovation or demolition.

Asbestos Periodic Surveillance

Campus Name:	Assessment (1618 Mills)	
Campus Number: _	141	Project Number:	24007
Inspector Name:	Bakari	werss	

WYNN L. WHITE
CONSULTING
ENGINEERS, INC.
P.O.B. 83527
Baton Rouge, LA
70884
(225) 761-9141
Form 4.9.63.14

Building Number	Comments
210	Marie Marie N/A
211	Fin good condition NIA
212	NIA
213	
214	
215	
216	
217	
218	
219	
220	
Signature: B	Date: Sheet <u>1</u> of <u>1</u>

Section G Part III

CLEANING

List each time that cleaning under *LAC 33:III.2719.C* is performed. (*LAC 33:III.2725.E*)

Date of	Name	Locations Cleaned	Methods used to perform cleaning
Cleaning	(Printed or Type)		

Section G Part IV

O&M ACTIVITIES

List the following information for each Operation and Maintenance activity conducted after December 14, 1987: (*LAC 33:III.2725.F*) Attach behind Section G, Part IV.

- Name of Person(s) Performing the Activity
- Start and Completion Dates for each Activity
- Location where Such Activity Occurred
- Description of Activity
- If Asbestos was Removed, the Name and Location of Storage or Disposal Site

MAINTENANCE ACTIVITIES OTHER THAN SMALL SCALE SHORT DURATION (SSSD)

List the following information for each time a major asbestos activity under *LAC 33:III.2719.E* is performed: (*LAC 33:III.2725.G*) Attach behind Section G, Part IV.

Name of the Person Performing the Activity	Start/Completion Dates	Location	Description of the Activity	If Asbestos was Removed Name and Location of Storage and Disposal Site
1 offorming the frethvity	Dutos		Tionvity	Location of Storage and Disposal Site

FIBER RELEASE EPISODE

For each fiber release episode that has occurred post December 14, 1987, list the following information: (*LAC 33:III.2725.H*) Attach behind Section G, Part IV.

- Date and Location of Episode
- Method of Repair
- Preventive Measures or Response
- Name of Person Performing the Work
- If Asbestos was Removed, the Name and Location of Storage and Disposal Site