


01/06/2026

BEAUMONT ISD – STADIUM SCOREBOARD ELEC

BEAUMONT INDEPENDENT SCHOOL DISTRICT


Issue Date: January 6, 2026

Salas O'Brien, LLC Project No.: 2550-02337

Salas O'Brien, LLC

TABLE OF CONTENTS

Beaumont ISD – Doggett Stadium Scorebook
Salas O'Brien Project No. #2550-02337



01/06/2026

I. PROPOSAL DOCUMENTS

II. SPECIFICATIONS

DIVISION 2 – 22 NOT USED

DIVISION 23 – MECHANICAL NOT USED

DIVISION 26 - ELECTRICAL

Section	
26 01 05	Electrical Operating and Maintenance Manuals
26 05 00	Electrical General Provisions
26 05 05	Electrical Alterations Project Procedures
26 05 10	Contract Quality Control
26 05 12	Electrical Shop Drawings, Coordination Drawings and Product Data
26 05 19	Conductors and Connectors
26 05 27	Expansion of Existing Electrical Grounding System
26 05 33	Conduit Systems
26 05 35	Electrical Connections for Equipment
26 05 37	Electrical Boxes and Fittings
26 05 40	Electrical Gutters and Wireways
26 05 50	Firestops
26 12 16	Three Phase, Energy Efficient Dry-Type Harmonic Mitigating Transformers (HMT) -15kVa and Above
26 12 17	Ultra High Efficiency K-rated Transformers
26 24 14	Testing, Maintenance and Modifications to Existing Switchboards and Feeder Distribution Panelboards
26 24 16	Panelboards and Enclosures
26 24 25	Enclosed Switches
26 29 00	Miscellaneous Electrical Controls and Control Wiring
26 43 00	Surge Protection Devices

DIVISION 27 - COMMUNICATIONS

Section	
27 41 33	Display Systems

III. DRAWINGS

CS-1	Cover Sheet
E1.0	Electrical Site Plan
E2.0	Electrical Details and Schedules

SECTION 26 01 05

ELECTRICAL OPERATING AND MAINTENANCE MANUALS

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Compile electrical product data and related information appropriate for Owner's operation and maintenance of products furnished under Contract. Prepare electrical operating and maintenance data as specified in this Section and as referenced in other sections of specifications.

B. Instruct Owner's personnel in operation and maintenance of equipment and systems.

C. Submit 3 copies of complete manual in final form.

1.2 ELECTRICAL OPERATING AND MAINTENANCE MANUAL SUBMITTAL SCHEDULE

A. Thirty (30) days after receipt of reviewed submittals bearing the Architect / Engineer's stamp of acceptance (including re-submittals), submit for review 1 copy of the first draft of the Electrical Operating and Maintenance Manual. This copy shall contain as a minimum:
   1. Table of Contents for each element
   2. Contractor information
   3. All shop drawings, coordination drawings and product data, bearing the Architect / Engineer's stamp of acceptance.
   4. All parts and maintenance manuals for items of equipment
   5. Warranties (without starting dates)
   6. Certifications that have been completed; submit forms and outlines of certifications that have not been completed
   7. Operating and maintenance procedures.
   8. Form of Owner's Training Program Syllabus (including times and dates)
   9. Control operations / equipment wiring diagrams
   10. Coordination Drawings
   11. Schedule of Lamps, Light Engines
   12. Schedule of Ballasts and Drivers
   13. Schedule of Fuses
   14. Other required operating and maintenance information that are complete.

B. Copy will be returned to the Contractor within 15 days with comments for corrections.

C. Submit the completed manuals in final electronic form to the Architect / Engineer.
   1. Prior to substantial completion for Owner's use after the Owner accepts facility maintenance.
   2. Include all specified data, test reports, drawings, dated warranties, certificates, along with other materials and information.

D. The Architect / Engineer shall review the manuals for completeness within 15 days.

E. The Contractor shall be notified of any missing or omitted materials. The Manuals shall be reworked by the Contractor, as required, in the office of the Architect / Engineer. The manuals will not be retransmitted.

F. Complete electronic manuals shall be delivered to the Owner prior to substantial completion.

PART 2 - PRODUCTS

2.1 BINDERS

A. Commercial quality black, 3-ring binders with clear, durable, cleanable plastic covers.

B. Minimum ring size: 1"; Maximum ring size: 3".

C. When multiple binders are used, correlate the data into related groupings.

D. Label contents on spine and face of binder with full size insert. Label under plastic cover.

PART 3 - EXECUTION

3.1 ELECTRICAL OPERATION AND MAINTENANCE MANUAL

A. Form for Manuals:
1. Prepare data in form of an instructional manual for use by Owner's personnel.
2. Format:
a. Size: 8-1/2" x 11"
b. Text: Manufacturer's printed data or neatly typewritten.
3. Drawings:
a. Provide reinforced punched binder tab and bind in text.
b. Fold larger drawings to size of text pages.
4. Provide flyleaf indexed tabs for each separate product or each piece of operating equipment.
5. Cover: Identify each volume with typed or printed title "Operating and Maintenance Instructions". List:
a. Title of Project
b. Identity of separate structures as applicable
c. Identity of general subject matter covered in the manual.
6. Binder as specified

B. Content of Manual:
1. Neatly typewritten Table of Contents for each volume arranged in systematic order as outlined in the specifications.
a. Contractor, name of responsible principal, address and telephone number
b. A list of each product required to be included, indexed to content of the volume.
c. List with each product, name, address and telephone number of:
1) Subcontractor or installer
2) Maintenance contractor as appropriate
3) Identify area of responsibility of each.
4) Local source of supply for parts and replacement
d. Identify each product-by-product name and other identifying symbols as set forth in Contract Documents.
2. Product Data:
a. Include those sheets pertinent to the specific product.
b. Annotate each sheet to:
1) Identify specific product or part installed.
2) Identify data applicable to installation.
3) Delete references to inapplicable information.
3. Drawings:
a. Supplement product data with drawings as necessary to illustrate:
1) Relations of component parts of equipment and systems

2) Control and flow diagrams

b. Coordinate drawings with information in Project Record Documents to assure correct illustration of completed installation.

c. Do not use Project Record Documents as maintenance drawings.

4. Written text as required to supplement product data for the particular installation:
   a. Organize in consistent format under separate headings for different procedures.
   b. Provide logical sequence of instructions for each procedure.
5. Copy of each warranty, bond and service contract issued
   a. Provide information sheet for Owner's personnel, giving:
      1) Proper procedures in event of failure
      2) Instances that might affect validity of warranties or bonds
6. Shop drawings, coordination drawings and product data as specified.

C. Sections for Equipment and Systems
1. Content for each unit of equipment and system as appropriate:
   a. Description of unit and component parts:
      1) Function, normal operating characteristics, and limiting conditions.
      2) Performance curves, engineering data and tests.
      3) Complete nomenclature and commercial number of replaceable parts.
   b. Operating procedures:
      1) Start up, break-in, routine / normal operating instructions
      2) Regulation, control, stopping, shut down and emergency instructions
      3) Summer and winter operating instructions
      4) Special operating instructions
   c. Maintenance procedures:
      1) Routine operations
      2) Guide to trouble-shooting
      3) Disassembly, repair and reassembly
      4) Alignment, adjusting and checking
      5) Routine service based on operating hours
   d. Servicing and lubrication schedule
      1) List of lubricants required
   e. Manufacturer's printed operating and maintenance instructions.
   f. Copies of typed circuit directories of panel board to reflect actual room graphics numbers and room names (not architectural room numbers from the drawings).
      1) Electrical
      2) Controls
      3) Communications
   g. Original manufacturer's parts list, illustrations, assembly drawings and diagrams required for maintenance.
      1) Predicted life of part subject to wear
      2) Items recommended to be stocked as spare parts
   h. Schedule of fuses
   i. Complete equipment field accessible internal wiring diagrams
   j. Schedule of lamps
   k. Schedule of ballasts
   l. Each Contractor's coordination drawings
   m. List of original manufacturer's spare parts and recommended quantities to be maintained in storage
   n. Other data as required under pertinent sections of the specifications

2. Prepare and include additional data when the need for such data becomes apparent during instruction of Owner's personnel.
3. Additional requirements for operating and maintenance data as outlined in respective sections of specifications
4. Provide complete information for products specified in Division 26.
5. Provide certificates of compliance as specified in each related section.
6. Provide start up reports as specified in each related section.
7. Provide signed receipts for spare parts and material.
8. Provide training report and certificates.

END OF SECTION

SECTION 26 05 00

ELECTRICAL GENERAL PROVISIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Except as modified in this Section, General Conditions, and Supplementary Conditions, applicable provisions of Division 1 General Requirements, and other provisions and requirements of the Contract Documents apply to work of Division 26 Electrical.

B. Applicable provisions of this section apply to all sections of Division 26, Electrical.

1.2 CODE REQUIREMENTS AND FEES

A. Perform work in accordance with applicable statutes, ordinances, codes and regulations of governmental authorities having jurisdiction.

B. Electrical work shall comply with applicable inspection services:
1. Underwriters Laboratories
2. National Fire Protection Association
3. State Health Department
4. Local Municipal Building Inspection Department adopted codes with amendments
5. National Electrical Code with local amendments
6. State Regulatory Agencies
7. Where the project is located outside a municipal jurisdiction, and has no municipal inspection services, the National Electrical Code with amendments of the municipality with extraterritorial jurisdiction shall govern.
8. Where the project is located outside any municipal jurisdiction, including extraterritorial jurisdictions, the National Electrical Code with local adopted amendments of the largest municipality located in the same county or parish shall govern.
9. International Energy Conservation Code
10. National Electrical Safety Code

C. Resolve any code violations discovered in contract documents with the Engineer prior to award of the contract. After Contract award, any correction or additions necessary for compliance with applicable codes shall be made at no additional cost to the Owner.

D. This Contractor shall be responsible for being aware of and complying with asbestos NESHAP regulations, as well as all other applicable codes, laws and regulations.

E. Obtain all permits required.

1.3 CONTRACTOR'S QUALIFICATIONS

A. An approved contractor for the work under this division shall be:
1. A specialist in this field and have the personnel, experience, training, and skill, and the organization to provide a practical working system.
2. Able to furnish evidence of having contracted for and installed not less than 3 systems of comparable size and type that has served their Owners satisfactorily for not less than 3 years.

1.4 REFERENCE SPECIFICATIONS AND STANDARDS

A. Materials which are specified by reference to Federal Specifications; ASTM, ASME, ANSI, APWA, or AWWA Specifications; Federal Standards; or other standard specifications must comply with latest editions, revisions, amendments or supplements in effect on date proposals are received. Referenced specifications and standards are minimum requirements for all equipment, material and work. In instances where specified capacities, size or other features of equipment, devices or materials exceed these minimums, meet specified capacities.

B. Use electrical materials and equipment that is constructed and tested in accordance with the standards of NEMA, ANSI, ASTM, or another recognized commercial standard. If materials and equipment is labeled, listed, or recognized by any Nationally Recognized Testing Laboratory (NRTL) acceptable to the Occupational Safety and Health Administration (OSHA), then provide NRTL-labeled, listed, or recognized material and equipment. Acceptable NRTLs include but are not limited to:
   1. Underwriters Laboratories, Inc. (UL)
   2. Factory Mutual Research Corp. (FMRC) (also referred to as “Factory Mutual Global,” or “FM Global”)
   3. Intertek Testing Services NA, Inc. (ITSNA, formerly ETL)
   4. Canadian Standards Association (CSA)
   5. A complete listing of acceptable NRTLs is published on the OSHA website at http://www.osha.gov/dts/otpca/nrtl/.

C. Where material and equipment are not labeled, listed, or recognized by any NRTL, provide a manufacturer’s Certificate of Compliance indicating complete compliance of each item with applicable standards of NEMA, ANSI, ASTM, or other recognized commercial standard.

D. Do not install or use electrical material or equipment for any use other than that for which it was designed, labeled, listed, or identified unless formally approved for such use by the Owner’s AHJ. This *National Electrical Code*® requirement is re-stated for emphasis.

E. Codes and Standards applicable to this Division:
   1. ANSI – American National Standards Institute
      a. ANSI Z535.1, Safety Colors
      b. ANSI Z535.2, Environmental and Facility Safety Signs
      c. ANSI Z535.3, Criteria for Safety Symbols
      d. ANSI Z535.4, Product Safety Signs and Labels
   2. ASHRAE – American Society of Heating, Refrigeration, and Air Conditioning Engineers:
      a. ASHRAE Standard 90.1, *Energy Standards for Buildings Except for Low Rise Residential Buildings [ANSI, IESNA]*
   3. ASTM – American Society for Testing and Materials
   4. CBM – Certified Ballast Manufacturers
   5. ICC – International Code Council
      a. International Building Code® (IBC)
      b. International Existing Building Code® (IEBC)
   6. ICEA – Insulated Cable Engineers Association
      a. ICEA S-93-639, *Shielded Power Cables 5-46kV* (NEMA WC-74)
   7. IEEE® - Institute of Electronics and Electrical Engineers
      a. IEEE C2™, *National Electrical Safety Code* (NESC) [ANSI]
      b. IEEE Std 141™, *Recommended Practice for Electric Power Distribution for Industrial Plans* (“Red Book”)
      c. IEEE Std 143™, *Recommended Practice for Grounding of Industrial and Commercial Power Systems* (“Green Book”)

d. IEEE Std 241™, *Recommended Practice for Electric Power Systems in Commercial Buildings* (“Gray Book”)
e. IEEE Std 242™, *Recommended Practice for Protection and Coordination of Industrial and Commercial Power Systems* (“Buff Book”)
f. IEEE Std 315™, *Graphic Symbols for Electrical and Electronics Diagrams*
g. IEEE Std 399™, *Recommended Practice for Power Systems Analysis* (“Brown Book”)
h. IEEE Std 446™, *Recommended Practice for Emergency and Standby Power Systems for Industrial and Commercial Applications* (“Orange Book”)
i. IEE Std 493™, *Recommended Practice for the Design of Reliable Industrial and Commercial Power Systems* (“Gold Book”)
j. IEEE Std 519™, *Recommended Practices and Requirements for Harmonic Control in Electrical Power Systems*
k. IEEE Std 739™, *Recommended Practice for Energy Management in Industrial and Commercial Facilities* (“Bronze Book”)
l. IEEE Std 902™, *Guide for Maintenance, Operation, and Safety of Industrial and Commercial Power Systems* (“Yellow Book”)
m. IEEE Std 1015™, *Recommended Practice Applying Low-Voltage Circuit Breakers Used in Industrial and Commercial Power Systems* (“Blue Book”)
n. IEEE Std 11oo™, *Recommended Practice for Powering and Grounding Electronic Equipment* (“Emerald Book”)
o. IEEE Std 1584™, *Guide for Performing Arc-Flash Hazard Calculations*

8. IESNA – Illuminating Engineering Society of North America
   a. IESNA *Lighting Handbook*, Ninth Edition
   b. IESNA RP-1, *American National Standard Practice for Office Lighting*
   c. IESNA RP-7, *American National Standard Practice for Lighting Industrial Facilities*
9. NECA – National Electrical Contractors Association:
   a. NECA 1, *Good Workmanship in Electrical Construction* [ANSI]
   b. NECA 90, *Recommended Practice for Commissioning Building Electrical Systems* [ANSI]
   c. NECA 100, *Symbols for Electrical Construction Drawings* [ANSI]
   d. NECA 101, *Standard for Installing Steel Conduits (Rigid, IMC, EMT)* [ANSI]
   e. NECA 104, *Recommended Practice for Installing Aluminum Building Wire and Cable* [ANSI]
   f. NECA / NEMA 105, *Recommended Practice for Installing Metal Cable Tray Systems* [ANSI]
   g. NECA 111, *Standard for Installing Nonmetallic Raceways (RNC, ENT, LFNC)* [ANSI]
   h. NECA / NACNA 120, *Standard for Installing Armored Cable (Type AC) and Metal-Clad Cable (Type MC)* [ANSI]
   i. NECA 202, *Recommended Practice for Installing and Maintaining Industrial Heat Tracing Systems* [ANSI]
   j. NECA 230, *Standard for Selecting, Installing and Maintaining Electric Motors and Motor Controllers* [ANSI]
   k. NECA 331, *Standard for Building and Service Entrance Grounding and Bonding*
   l. NECA 400, *Standard for Installing and Maintaining Switchboards* [ANSI]
   m. NECA 402, *Standard for Installing and Maintaining Motor Control Centers* [ANSI]
   n. NECA / EGSA 404, *Standard for Installing Generator Sets* [ANSI]

o. NECA 407, *Recommended Practice for Installing and Maintaining Panelboards* [ANSI]
p. NECA 408, *Recommended Practice for Installing and Maintaining Busways* [ANSI]
q. NECA 409, *Recommended Practice for Installing and Maintaining Dry-Type Transformers* [ANSI]
r. NECA 410, *Recommended Practice for Installing and Maintaining Liquid-Filled Transformers* [ANSI]
s. NECA 411, *Recommended Practice for Installing and Maintaining Uninterruptible Power Supplied (UPS)* (ANSI]
t. NECA 420, *Standard for Fuse Applications* [ANSI]
u. NECA 430, *Standard for Installing Medium-Voltage Metal-Clad Switchgear* [ANSI]
v. NECA / IESNA 500, *Recommended Practice for Installing Indoor Lighting Systems* [ANSI]
w. NECA / IESNA 501, *Recommended Practice for Installing Exterior Lighting Systems* [ANSI]
x. NECA / IESNA 502, *Recommended Practice for Installing Industrial Lighting Systems* [ANSI]
y. NECA / MACSCB 600, *Recommended Practice for Installing and Maintaining Medium-Voltage Cable* [ANSI]
z. NECA / NEMA 605, *Installing Underground Nonmetallic Utility Duct* [ANSI]

10. NEMA – National Electrical Manufacturers Association
11. NETA – International Electrical Testing Association, Inc.:
    a. NETA ATS, *Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems*
    b. NETA MTS, *Maintenance Testing Specifications for Electrical Power Distribution Equipment and Systems*
    c. NETA ETT, *Standard for Certification of Electrical Testing Technicians* [ANSI]
12. NFPA – National Fire Protection Association:
    a. NFPA 20®, *Standard for the Installation of Stationary Pumps for Fire Protection*®
    b. NFPA 70™, *National Electrical Code® (NEC®)*
    c. NFPA 70E, *Standard for Electrical Safety in the Workplace.*
    d. NFPA 101®, Life Safety Code®
    e. NFPA 110, *Standard for Emergency and Standby Power Systems*
    f. NFPA 111, *Standard on Stored Electrical Energy Emergency and Standby Power Systems*
    g. NFPA 780, *Standard for the Installation of Lightning Protection Systems*
    h. All other NFPA codes and standards except NFPA 5000
13. OSHA – Occupational Safety and Health Administration
14. IECC – International Energy Conservation Code
15. ISO – International Organization for Standardization
16. State and Local Energy Conservation Code
17. Applicable County and Municipal Codes

1.5 CONTRACT DRAWINGS

A. Contract drawings are diagrammatic only and do not give fully dimensioned locations of various elements of work. Determine exact locations from field measurements.

B. Every effort has been made by the Engineer to indicate wiring of all receptacles, light fixtures, switches, telephone outlets, HVAC equipment, other equipment, elevator equipment, and all other devices / appliances requiring electrical power. It is the intent of

the Engineer that all light fixtures be powered and controlled unless specifically noted on the plans; that all wiring devices (receptacles and direct connected equipment) be circuited to a power source of the correct voltage and that all HVAC, elevator equipment and other equipment be properly wired to the correct voltage power source; that all communications and security systems devices and equipment and all fire alarm system devices and equipment are installed, wired and systems are fully operational.

C. It is the responsibility of the Contractor to review the construction drawings (reflected ceiling plans) for light fixtures, casework elevation details for electrical devices which are not indicated on the electrical drawings; to review the mechanical and plumbing documents and all other drawings to determine the electrical rough-ins for all equipment requiring power connections, and to include in their proposals the correct and complete electrical rough-ins for all of these items which were inadvertently not indicated on the electrical drawings, OR the Contractor shall specifically enumerate each item requiring electrical rough-in which is not specifically shown on the electrical drawings, and indicate the electrical provisions of these items as specifically excluded from his proposal.

D. It is the responsibility of the Contractor to compare the scale of all electrical drawings with the scale of the architectural drawings and make adjustments to all electrical drawings which have the incorrect drawing scale so that his material takeoffs are not in error due to an incorrectly labeled drawing scale and his proposal is complete.

E. No proposal shall be accepted which specifically excludes any of the provisions of paragraphs B, C, or D above.

1.6 PROJECT RECORD DOCUMENTS

A. Maintain at the job site a separate set of white prints (black line) of the contract drawings for the sole purpose of recording the "as-built" changes and diagrams of those portions of work in which actual construction is significantly at variance with the contract drawings. Mark the drawings with a colored pencil. Prepare, as the work progresses and upon completion of work, reproducible drawings clearly indicating locations of various major and minor feeders, equipment, and other pertinent items, as installed. Record underground and under slab service and feeders installed, dimensioning exact location and elevation of such installations.

B. At conclusion of project, obtain without cost to the Owner, electronic PDF and AutoCAD 2014 and / or Revit CAD files of the original drawings and transfer as-built changes to these. Provide the following as-built documents including all contract drawings regardless of whether corrections were necessary and include in the transmittal: “2 sets of CDs and prints for Owner’s use, one set of CDs, prints, and mylars for Architect / Engineers Records”. Delivery of these as-built electronic, reproducibles and prints is a condition of final acceptance.
   1. 3 sets of electronic AutoCAD (2014 dwg) and / or Revit CAD drawing files, on CD-ROM media, of each contract as-built drawing.
   2. One reproducible Dayrex Mylar film positive of each contract as-built drawing.
   3. Three sets of blue-line prints of each contract as-built drawing.
   4. Three sets of pdf prints of each contract as-built drawing on CD.

C. As-Built Drawings should indicate the following information as a minimum:
   1. Indicate all addendum changes to documents.
   2. Remove Engineer’s Seal, name, address, and logo from drawings.
   3. Mark documents RECORD DRAWINGS.
   4. Clearly indicate: DOCUMENT PRODUCED BY:
   5. Indicate all changes to construction during construction. Indicate actual routing of all conduits, etc. that was deviated from construction drawings.

6. Indicate exact location of all underground electrical raceways, and elevations.
7. Correct schedules to reflect (actual) equipment furnished and manufacturer.
8. During the execution of work, maintain a complete set of Drawings and specifications upon which all locations of equipment, devices, and all deviations and changes from the construction documents in the work shall be recorded.
9. Exact location of all electrical equipment in building. Label panel schedules to indicate actual location.
10. Exact location of all electrical equipment in and outside of the building.
11. Exact location of all outdoor lighting poles and equipment.
12. Location, size and routing of all feeder conduits, equipment, etc. shall be accurately and neatly shown to dimension.
13. Exact location of all roof mounted equipment, wall, roof and floor penetrations.
14. Cloud all changes.
15. Update all panel schedules with all additional circuits added or deleted through construction. Identify each circuit to include all information specified for directory cards for circuit identification in panelboards.

1.7 SPACE REQUIREMENTS

A. Consider space limitations imposed by contiguous work in selection and location of equipment and material. Do not provide equipment or material that is not suitable in this respect.

1.8 RELATION WITH OTHER TRADES

A. Carefully study all matters and conditions concerning the project. Submit notification of conflict in ample time to prevent unwarranted changes in any work. Review other Divisions of these specifications to determine their requirements. Extend electrical services and final connections to all items requiring same.

B. Because of the complicated relationship of this work to the total project, conscientiously study the relation and cooperate as necessary to accomplish the full intent of the documents.

C. Provide sleeves and inserts in forms as required for the work. Stub up and protect open ends of pipe before any concrete is placed. Furnish sizes of required equipment pads. Furnish and locate bolts and fittings required to be cast in them.

D. Locate and size openings required for installation of work specified in this Division in sufficient time to prevent delay in the work.

E. Refer to other Divisions of the specifications for the scope of required connections to equipment furnished under other Division. Determine from the General Contractor / Construction Manager for the various trades, the Owner, and by direction from the Architect / Engineer, the exact location of all items. The construction trades involved shall furnish all roughing-in drawings and wiring diagrams required for proper installation of the electrical work.
   1. Make final electrical connections to all electrically operated equipment indicated on the drawings, except as noted.
   2. The responsibility for alignment of motor and driven equipment is specified in the related division.

F. Request all Shop Drawings required in ample time to permit proper installation of all electrical provisions.

G. Extend services as indicated to the various items of equipment furnished by others. Rough-in for the various items and make final connections ready for operation upon placing of the equipment.

1.9 CONCEALED AND EXPOSED WORK

A. When the word "concealed" is defined as hidden from sight as in chases, furred spaces or above ceilings. "Exposed" is defined as open to view, in plain sight.

1.10 GUARANTEE

A. Guarantee work for 1 year from the date of substantial completion of the project. During that period make good any faults or imperfections that may arise due to defects or omissions in material, equipment or workmanship. Replacement of failed parts or equipment shall be provided.

1.11 MATERIAL AND EQUIPMENT

A. Furnish new and unused materials and equipment meeting the requirements of the paragraph specifying acceptable manufacturers. Where two or more units of the same type or class of equipment are required, provide units of a single manufacturer.

1.12 NOISE AND VIBRATION

A. Select equipment to operate with minimum noise and vibration. If noise or vibration is produced or transmitted to or through the building structure by equipment, piping, ducts or other parts of work, and judged objectionable by the Owner, Architect, or Engineer, rectify such conditions at no additional cost to the Owner. If the item of equipment is judged to produce objectionable noise or vibration, demonstrate at no additional cost that equipment performs within designated limits on a vibration chart.

1.13 ACCEPTABLE MANUFACTURERS

A. Manufacturers names and catalog number specified under sections of Division 26 are used to establish standards of design, performance, quality and serviceability and not to limit competition. Equipment of similar design, materials, energy efficiency characteristics (where applicable) and lighting performance characteristics (where applicable) equal to that specified, manufactured by a named manufacturer shall be acceptable on approval. A request for prior approval of equipment not listed must be submitted ten (10) days before proposal due date. Submit a marked-up set of the relevant specification section indicating all variances, a comparison to the specified product, and of construction and performance criteria, complete design and performance data for the specified product and the proposed substitution for comparison to the Engineer. The Architect issues approvals of acceptable manufacturers as addenda to the Construction Proposal Documents.

1.14 UTILITIES, LOCATIONS AND ELEVATIONS

A. Locations and elevations of the various utilities included within the scope of this work:
   1. Obtained from utility maps and other substantially reliable sources.
   2. Are offered separate from the Contract Documents as a general guide only without guarantees to accuracy.

B. Examine the site and verify the location and elevation of all utilities and of their relation to the work. Existing utilities indicated on the site plans are for reference only and shall be field verified by the Contractor with the respective public or private utility.

1.15 OPERATING TESTS

A. After all electrical systems have been completed and put into operation, subject each system to an operating test under design conditions to ensure proper sequencing and operation throughout the range of operation. Tests shall be made in the presence of the Architect / Engineer and Owner. Provide minimum 24-hour advance notice of scheduling of all tests. Make adjustments as required to ensure proper functioning of all systems. Special tests on individual systems are specified under individual sections. Submit 3 copies of all certifications and test reports adequately in advance of completion of the work to allow for remedial action as required to correct deficiencies discovered in equipment and systems.

1.16 WARRANTIES

A. All normal and extended warranties shall include parts, labor, miscellaneous materials, travel time, incidental expenses, normal freight / shipping, refrigerant, oils, lubricants, belts, filters and any expenses related to service calls required to diagnose and correct warranty problems.

B. Manufacturer’s warranty shall be from one year from date of substantial completion. Contractor shall be responsible for extending the warranties regardless of date of installation or commissioning.

C. Submit 3 copies of all warranties and guarantees for systems, equipment, devices and materials. These shall be included in the Operating and Maintenance Manuals.

1.17 BUILDING CONSTRUCTION

A. It shall be the responsibility of the sub-contractor to consult the Contract Drawings, details and specifications and thoroughly familiarize himself as to the construction and all job-related requirements. All construction trades shall cooperate with the General Contractor / Construction Manager Job site superintendent and lay out work so that all raceways and other items are placed in the walls, furred spaces, chases, etc., so that there shall be no delay in the job.

1.18 TEMPORARY FACILITIES

A. General: Refer to Division 1 for general requirements on temporary facilities.

B. Temporary Wiring: Temporary power and lighting for construction purposes shall be provided under this Division. Installation of temporary power shall be in accordance with NEC Article 527.

C. Temporary facilities, wire, lights and devices are the property of this Contractor and shall be removed by this Contractor at the completion of the Contract.

PART 2 - PRODUCTS – NOT USED

PART 3 - EXECUTION

3.1 IDENTIFICATION OF EQUIPMENT

A. Identification of Equipment:
   1. All major equipment shall have a manufacturer's label identifying the manufacturer's address, equipment model and serial numbers, equipment size,

and other pertinent data. Take care not to obliterate this nameplate. The legend on all nameplates or tags shall correspond to the identification shown on the Operating Instructions. All panels, cabinets, or equipment requiring 120 volt or higher power shall be labeled as required which includes circuit designation and circuit panelboard location, regardless of which discipline installs the equipment.

2. Three layer laminated plastic engraved identifying nameplate shall be permanently secured to each switchboard, distribution panel, motor control center, transformer, panelboard, safety disconnect switch, enclosed circuit breaker, transfer switches, remote generator transfer deices not installed inside light fixtures, wireway, busduct plug, terminal cabinet, surge protective device, capacitor, individual motor controller, contactor, fire alarm panels (main and remote booster), and communications (voice, data, video) cabinet or rack, security panels, time clocks, BMCS cabinets, sound reinforcement cabinets and racks, miscellaneous control cabinets, equipment integral disconnect switches, toggle or motor switches, disconnects for equipment, exterior junction boxes, exterior pull boxes, exterior wireways and gutters, and rooftop equipment (i.e.: supply and exhaust fans, rooftop HVAC equipment) with stainless steel screws.

   a. Utility Power: White letters on black background
      Generator Power (White letters on red background
      UPS Power: White letters on blue background
      Load Bank Circuits: White letters on green background
      Solar or Wind Power Generation: White on orange background

   b. Identifying nameplates shall have 1/2-inch high, engraved letters for equipment designation and ¼-inch letters indicating source circuit designation, (i.e.: “PANEL HA –fed from MDP-6 located in Mech. Rm. 100”). The words “fed from” and “located” shall be included in the labeling.

      Example: Panel HA
      Fed From MSB
      Located Main Elec. RM 100

      Example: Disconnect for Panel LK
      Location: Kitchen
      Fed From Transformer TLK
      Located Main Elec. RM 100

   c. Each switchboard, distribution panel, transfer switch, generator transfer device (GTD) for emergency lighting, and motor control center feeder or branch circuit device shall have a nameplate showing the load and location of load served in ¼-inch high, engraved letters. Circuit breaker name and kirk key designation if applicable

   d. Each section of multiple section panelboards shall also indicate panelboard section number (i.e.: Panel “HA-Section 2 – fed from MDP-6 located in Mech. Rm. 100”)

   e. Motor Controllers, starters, and contactors: Provide neatly typed label inside each motor controller and contactor enclosure door identifying motor or load served, nameplate horsepower, full load amperes, code letter, service factor, and voltage / phase rating.

   f. Individual motor controller and contactor nameplates shall include load served, location of load served, panel and circuit numbers serving load, location of panel serving load, panel and circuit number serving control circuit, location of panel serving control circuit (if different from panel serving load), description and location (if applicable) of control controlling contactor (i.e. Controlled: Switch in RM 100, and Controlled: BMCS). Contactor nameplate is to include whether it is a lighting or receptacle contactor and name of contactor. i.e., C-1.

Lighting Contactor Example	Receptacle Contactor Example
Lighting Contactor C1	Receptacle Contactor C2

West Parking Lot Pole Lights Fed From Panel HA-2,4,6 Located Main Elec. Rm. 100 Control Circuit-Panel LA 42 Located Main Elec. Rm. 100 Controlled-BMCS	Table Recpts Lab Rm 100 Fed From Panel LA-2,4,6,8 Located Mech. Rm. 110 Control Circuit-Panel LA-42 Controlled-Emer Shut Off Mushroom Switch Rm 101
GTD Example	
Exterior lighting wall packs / north soffit / west metal canopy Fed from Panels EHA-2 located in Elec. RM 105 and HA-1 via Lighting Contactor controlled by BMCS located in Elec. RM 200.	

g. Exterior J-boxes, pull boxes, and gutters shall have panel identification, circuit numbers, and location of panel listed on name plate. Low voltage shall be identified per contents, examples: DATA, BMCS, F/A

h. Name plates on equipment served from switchboards, distribution panels, I-Line panels, and motor control centers are not to include circuit numbers shown on drawings as the circuit numbers are for construction drawing purposes only.

i. Panel names for 277/480v shall start with the letter “H” and 120/208v, 120/240v shall start with the letter “L”. No panel shall be named to include a number other than multi sectional panels, example HA-section 2. New panels installed in renovation or site additions shall have names approved or designated by Owner’s electrical representative. Panel names shall not include the letter “I”. Transformer names shall start with the letter “T” followed by the panel name it serves, i.e., TLA.

j. Main service ATS label shall include equipment name, emergency source and location, normal power source and location, panel served and location. Wall mounted ATS serving lighting loads shall include type of lighting and location, emergency panel and circuit ID and location of panel, normal panel and circuit ID and location of panel.

Main Service ATS Example ATS-1	Wall Mounted Lighting ATS Example ATS
Emer Power-Emer Generator Located Chiller Yard Normal Power-MSB Located-Mech Rm 100 Serves Panel EHA Located-Mech Rm 100	Exterior Wall Packs/Soffit Lights North/West Metal Canopy Lights Fed from EHA-2 Located Mech Rm 200 Fed From HB-4 Located Mech Rm 150

k. Name plates shall include rated bus amperage, voltage, number of phases, number of wires and type of essential electrical system as applicable.

l. Switchgear, switchboards, panelboards, motor control centers, or service equipment available fault current labeling: Provide a 2x3 inch permanently affixed (notice) label with white lettering on contrasting blue background permanently affixed to the equipment prior to energizing the equipment. The label shall include the date of installation and the date of calculation and comply with ANSI Z535.4 current standards design and durability. The date of calculation shall be the date indicated by the Engineer of Record’s seal on the Construction Documents. Example:

AVAILABLE FAULT CURRENT: ##, ### AMPS
DATE OF INSTALLATION: MM/DD/YY
DATE OF CALCULATION: MM/DD/YY

3. Cardholders and directory cards shall be furnished for circuit identification in panelboards. Cardholder shall be located on inside of panel door and shall be in a metal frame with clear plastic front. Circuit lists shall be typewritten. Circuit descriptions shall include explicit description and identification of items controlled by each individual breaker, including final graphics room number or name designation and name of each item served. If no building appointed room number or name is given, list locations per the following examples – A. Storage in Rm 100 – B. Office in Rm 100 – C. Storage west of Rm. 100. List corridors as "corridors". Identify circuits controlled by contactors using a separate notation for each contactor used. List notation at bottom of schedule stating the circuits are controlled by a contactor, list exact location of contactor, and how switched. Do not use architectural room number designation shown on plans. Obtain final graphics room number identification from Architect's final room number graphics plan. All locations served by breakers shall be listed on schedule. Panel schedule shall be large enough to contain all information required. Also refer to Section 26 24 16.
4. Permanent, waterproof, black markers shall be used to identify each lighting and power grid junction box, gutter and wireway. Clearly indicate the panel and branch circuit numbers available at that junction box, gutter or wireway. Where low voltage relay panels are used for lighting control, identify the low voltage relay panel and number in addition to the branch circuit panel and number.
5. Pull Boxes, Transformers, Disconnect Switches, etc.: Field work each with a name plate showing identity, voltage and phase and identifying equipment connected to it. The transformer rating shall be shown on the panels or enclosures. For an enclosure containing a motor starter, the nameplate shall include the Owner's motor number, motor voltage, number of motor phases, motor load being serviced, motor horsepower, and motor full load current. Nameplates shall also indicate where panel is fed from.

B. Prohibited Markings: Markings intended to identify the manufacturer, vendor, or other source from whom the material has been obtained are prohibited for installation in public, tenant, or common areas within the project. Also prohibited are materials or devices that bear evidence that markings or insignias have been removed. Certification, testing (example, Underwriters Laboratories), and approval labels are exceptions to this requirement.

C. Warning Signs: Provide warning signs where there is hazardous exposure associated with access to or operation of electrical facilities. Provide text of sufficient size to convey adequate information at each location, mount permanently in an appropriate and effective location. Comply with industry standards for color and design.

D. Wire and Cable Markers: Provide vinyl cloth markers with split sleeve or tubing type, except in manholes provide stainless steel with plastic ties.

E. Wire and Cable Labeling: Provide wire markers on each conductor in all boxes, pull boxes, gutters, wireways, contactors, and motor controllers and load connection. Identify with panelboard / switchboard branch circuit or feeder number for power and lighting circuits, and with control wire number as indicated on equipment manufacturer's shop drawings for control wiring.

F. Underground Warning Tape: Thomas and Betts or approved equal. Six-inch wide plastic tape, colored red for 50 volts or above electrical, or orange for communications and control with suitable warning legend describing buried electrical lines; telephone lines and data lines per APWA recommendations. All underground electrical conduits shall be so identified. Tape shall be buried at a depth of 6-inches below grade and directly above

conduits or ductbanks. Provide magnetic marking tape below all underground electrical conduits.

G. Lighting Controls and Equipment: Provide self-adhesive machine typed tape labels with ¼" high white letters on ½" tall black background for digital lighting modules as "DLM". Modules or relays located above ceiling: adhere label to bottom of ceiling T-grid below relay location. Modules or relays located in mechanical or electrical rooms or other areas other than above ceiling: Adhere label to the cover of the module or relay and identify the area they control as "MAIN GYM", "BAND HALL", or "CORRIDOR 100", etc. Remote lighting control switches or push-button stations located remotely from the area they control: Adhere label to device face plate, not obstructing screw fasteners, and intuitively identify function such as "GYM LTG LOW-HIGH" or "CAFE LTG DIM", etc.

3.2 CUTTING AND PATCHING

A. General: Comply with the requirements of Division 1 for the cutting and patching of other work to accommodate the installation of electrical work. Except as authorized by the Architect / Engineer, cutting and patching of electrical work to accommodate the installation of other work is not permitted.

3.3 INSTRUCTION OF OWNER'S PERSONNEL

A. Prior to substantial completion, conduct an on-site training program to instruct Owner's operating personnel in the operation and maintenance of the electrical systems.
   1. Provide the training during regular working day.
   2. The instructors shall be experienced in their phase of operation and maintenance of the electrical systems and with the project.
   3. Refer to other specification sections for additional training and commissioning requirements.

B. Time to be allocated for instructions.
   1. Minimum of 20 hours dedicated instructor time.
   2. 4 hours on each of 5 days
   3. Additional instruction time for specific systems as specified in other Sections.

C. Before on-site training, submit the program syllabus; proposed time and dates; for review and approval, minimum 48 hours prior to proposed training time and date.
   1. One copy to the Owner
   2. One copy to the Architect / Engineer

D. The Owner shall provide a list of personnel to receive instructions and shall coordinate their attendance at the agreed upon times.

E. Use operation and maintenance manuals as the basis of instruction. Review manual with personnel in detail. Explain all aspects of operation and maintenance.

F. Demonstrate start-up, operation, control, adjustment, troubleshooting, servicing, maintenance, and shut down of each item of equipment.

G. Demonstrate equipment functions (both individually and as part of the total integrated system).

H. Prepare and insert additional data in the operating and maintenance manuals when the need for additional data becomes apparent during instructions.

I. Submit a report within one week after completion of training. List time and date of each demonstration, hours devoted to the demonstration, and a list of people present, with their respective signatures.

J. At the conclusion of the on-site training program, have the person designated by the Owner sign a certificate to certify that he / she has a proper understanding of the system, that the demonstrations and instructions have been satisfactorily completed, and the scope and content of the operating and maintenance manuals used for the training program are satisfactory.

K. Provide a copy of the report and the certificate in an appropriately tabbed section of each Operating and Maintenance Manual.

3.4 OPENINGS

A. Framed, cast or masonry openings for boxes, equipment or conduits are specified under other divisions. Drawings and layout work for exact size and location of all openings are included under this division.

3.5 HOUSEKEEPING PADS

A. Provide concrete equipment housekeeping pads under all floor and outdoor mounted electrical equipment.

B. Concrete and reinforcing steel shall be as specified in Division 3, or as indicated or noted.

C. Concrete pads:
1. 6-inches thick minimum indoors; 8-inches thick minimum outdoors or match existing if indicated on the drawings to extend existing pads, or in other sections of the specifications.
2. Chamfer strips at edges and corner of forms.
3. Smooth steel trowel finish.
4. Extend 3-inches minimum indoors beyond perimeter of equipment unless otherwise shown.
5. 6-inch x 6-inch #8 wire reinforcement mesh.

3.6 OBSTRUCTIONS

A. The drawings indicate certain information pertaining to surface and subsurface obstructions, which has been taken from available drawings. Such information is not guaranteed, however, as to accuracy of location or complete information.
1. Before any cutting or trenching operations are begun, verify with Owner's representative, utility companies, municipalities, and other interested parties that all available information has been provided.
2. Should obstruction be encountered, whether shown or not, alter routing of new work, reroute existing lines, remove obstruction where permitted, or otherwise perform whatever work is necessary to satisfy the purpose of the new work and leave existing services and structures in a satisfactory and serviceable condition.

B. Assume total responsibility for and repair any damage to existing utilities or construction, whether or not such existing facilities are shown.

3.7 VANDAL RESISTANT DEVICES

A. Where vandal resistant screws or bolts are employed on the project, deliver to the Owner 2 suitable tools for use with each type of fastener used, and 25 percent spare fasteners.

B. Proof of delivery of these items to the Owner shall be included in the Operating and Maintenance Manuals.

3.8 PROTECTION

A. Protect work, equipment, fixtures, and materials. At work completion, work must be clean and in original manufacturer's condition.

B. Do not deliver equipment to this project site until progress of construction has reached the stage where equipment is actually needed or until building is closed in enough to protect the equipment from weather. Equipment allowed to stand in the weather shall be rejected, and the contractor is obligated to furnish new equipment of a like kind at no additional cost to the Owner.

3.9 COORDINATION OF BRANCH CIRCUIT OVERCURRENT AND PROTECTION DEVICES

A. Review with equipment specified which requires electrical connections. Review equipment shop drawings and manufacturer's nameplate data and coordinate exact branch circuit overcurrent protective device and conductors with equipment provided.
   1. Provide equipment manufacturer's recommended overcurrent protective device indicated on nameplate at no additional cost to the Owner.
   2. If branch circuit conductors and / or conduit sizing is less than the minimum required by equipment manufacturer, notify the Architect / Engineer immediately, prior to rough-in.
   3. If equipment manufacturer is a substitution to the specified equipment manufacturer, provide the greater of the conductors specified or those required for the installed equipment manufacturer’s minimum circuit conductors, at no additional cost to the Owner.
   4. If conductors indicated on plans are in excess of that permitted by equipment manufacturer, notify Architect / Engineer immediately, prior to rough-in.
   5. If conductors indicated on plans are in excess of that permitted by the equipment manufacturer, provide the maximum conductors permitted by the equipment manufacturer based on NEC ampacity tables, either in a single set, or as a set of parallel conductors as permitted by the NEC. Conductor size and quantity entering the equipment enclosures shall not exceed the equipment manufacturer’s maximum recommendations.

3.10 FAULT CURRENT AND ARC FLASH STUDY FOR OVERCURRENT DEVICE COORDINATION

A. Contractor shall provide a coordination study, fault current analysis, and Arc-Flash study report for new electrical distribution equipment downstream to the last new overcurrent device in each feeder or branch circuit, conducted and prepared by the switchgear manufacturer. The coordination study and fault current analysis shall include the manufacturer’s recommendations for all adjustable overcurrent devices specified or provided. Study does not require inclusion of existing switchgear, except it shall include existing or new overcurrent devices in existing switchgear serving new switchgear. Contractor shall submit the report results prior to submitting switchgear submittals to allow changes or modifications to equipment selection.

B. Contractor shall adjust all overcurrent device settings based on manufacturer’s recommendations, or as directed by Owner / Architect at no additional cost to Owner. Settings for GFI shall be set at maximum as permitted by the NEC.

C. Arc-Flash & Shock-Hazard Warning Labels: Provide arc-flash and shock hazard-warning labels that comply with ANSI Z535.4 on switchgear, switchboards, transformers, motor

control centers, panelboards, motor controllers, safety switches, industrial control panels and other equipment that is likely to require examination, adjustment, servicing, or maintenance while energized. Locate the marking to be clearly visible to qualified persons before examination, adjustment, servicing, or maintenance of the equipment. On renovation projects, install arc-flash warning labels on existing equipment where lock-out / tag-out will be required for the renovation work. Provide the information listed below on each label. Specify that arc-flash warning label information be produced by the electrical equipment manufacturer or supplier as a part of the final power system studies to be submitted by the Contractor in accordance with the electrical acceptance testing.

1. Note: In addition to the final arc-flash analysis, the final power system studies include load flow and fault-current calculations, and an overcurrent protective device (OCPD) coordination study based on the actual equipment to be installed for the project.

D. Information to be determined and applied to electrical equipment:
   1. Arc-Flash Protection Boundary
   2. Arc-Flash incident energy calculated in accordance with IEEE Std 15841 ™
   3. Working distance calculated in accordance with IEEE Std 1584a ™
   4. NFPA 70E Hazard / Risk Category Number or the appropriate personal protective equipment (PPE) for operations with doors closed and covers on.
      a. Typical operations include operating circuit breakers, fused switches, and meter selector switches.
   5. System phase-to-phase voltage
   6. Condition(s) when a shock hazard exists (e.g., “With cover off”)
   7. Limited Approach Boundary as determined from NFPA 70E, Table 130.2(C)
   8. Restricted Approach Boundary as determined from NFPA 70E, Table 130.2(C)
   9. Prohibited Approach Boundary as determined from NFPA 70E, Table 130.2(C)
   10. Unique equipment designation or code (described under “Component Identification”
   11. Class for insulating gloves based on system voltage (e.g., Class 00 up to 500V)
   12. Voltage rating for insulated or insulating tools based on system voltage (e.g., 1000V)
   13. Date that the hazard analysis was performed.
   14. “Served from” circuit directory information including the serving equipment designation, location (e.g., room number), circuit number, and circuit voltage / number of phases / number of wires.
   15. If applicable, the “serves” circuit directory information including the served equipment designation, location (e.g., room number), circuit number, and circuit voltage / number of phases / number of wires.
   16. An abbreviated warning label may be used where it has been determined that no dangerous arc-flash hazard exists in accordance with IEEE 1584a ™, paragraph 9.2.3.
   17. Use a “DANGER” label where the calculated arc-flash incident energy exceeds 40 cal/cm.

E. Submittals: Submit four copies of coordination study and certified fault current study results to the Architect for review.

3.11 EQUIPMENT BACKBOARDS

A. Backboards: ¾ inch, fire retardant, exterior grade plywood, painted gray, both sides.
   1. Provide minimum of two 4-ft. by 8-ft. sheets of plywood for each new telephone equipment terminal location.
   2. Provide minimum of two 4-ft. by 4-ft. sheets of plywood for each new data / voice / video / communications equipment location / cable TV head end equipment, or security equipment location.

3.12 TESTING

A. The contractors for the various sub-systems shall submit proposed testing procedures for their systems, subject to review and approval and Owner acceptance. The contract will not be declared to be substantially complete until the functional operation of the subsystems have been demonstrated and verified and reports have been provided, reviewed and accepted.

B. The project will not be declared substantially complete until the following has taken place.
   1. The “As-Built” drawings have been submitted, reviewed and accepted by the Architect / Owner / Owner’s Construction Representative.
   2. The building emergency lighting system and other systems including but not limited to those listed below have been tested, completed factory start-up and programming and adjusting as required for a complete and fully operational system acceptable to the Architect and Owner.
      a. Occupancy Sensor and Lighting Controls
      b. Surge protective device equipment
      c. Overcurrent devices
      d. Motor Controllers
      e. Emergency Lighting
      f. Building Fire Alarm System
      g. Clock System
      h. Television Distribution System
      i. Building Data / Voice Cabling System
      j. Surveillance and Security System
      k. Intercom / Telephone
      l. Sound Reinforcement Systems
      m. Building Lightning protection System

3.13 LOAD BALANCING

A. Balance the loads on each low-voltage feeder so that the voltage on each phase is within +/- 1.0% of the average voltage of the three phases. Refer to the DOE Office of Industrial Technologies, “Motor Tip Sheet #7” dated September 2005 available for download to PDF format at no charge at: http://www1.eere.energy.gov/industry/bestpractices/pdfs/eliminate_voltage_un_balanced_motor-systemts7.pdf

END OF SECTION

SECTION 26 05 05

ELECTRICAL ALTERATIONS PROJECT PROCEDURES

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Inspection and service of existing equipment and materials to remain or be reused.

B. Handling of equipment and materials to be abandoned.

C. Handling of equipment and materials to be removed.

1.2 QUALITY ASSURANCE

A. Coordination with the Contractor prior to the disconnection or shutdown of existing equipment, or to the modification of existing operational systems.

1.3 CONTRACT DRAWINGS

A. There is the possibility that there exist conditions and devices that are affected by the work indicated on the drawings and called for in the specifications (project manual) that do not appear on the drawings. It is the Contractors responsibility to visit the site and determine all of the existing conditions and to consider these existing conditions when making and presenting a proposal, to have a complete proposal.

PART 2 - PRODUCTS

2.1 MATERIALS AND EQUIPMENT

A. Material used to upgrade and repair existing equipment shall conform to that specified.

B. Material used to upgrade and repair existing equipment shall not void existing warranties or listings of the equipment to be upgraded or repaired.

C. Material used to upgrade and repair existing equipment shall be new and shall be of the same manufacturer of the existing equipment, shall be acquired through the existing original equipment manufacturer’s approved distribution channels, shall have manufacturer’s warranties for the new material being used, and shall be listed for the use intended.

PART 3 - EXECUTION

3.1 INSPECTION

A. Existing materials and equipment indicated on the drawings or in the specifications to be reused shall be inspected for damaged or missing parts. Notify the Architect / Engineer, in writing, accordingly.

B. If using materials specified or shown on the drawing voids or diminishes the warranty or operation of remaining equipment or systems, the Contractor shall notify the Architect / Engineer, in writing.

C. Verify field measurements and circuiting arrangements.

D. Verify that abandoned wiring, panelboards, and switchboards, disconnect switches, and equipment serve only abandoned facilities. Where abandoned wiring, panelboards, switchboards, and equipment which serve existing facilities are to remain, Contractor shall provide means and methods to ensure existing facilities remain energized with the correct voltage, overcurrent protection, conductors, and circuit ampacity required by the existing facilities to remain.

E. Demolition Drawings are based on casual field observation, and when available, existing record documents. Report discrepancies to Architect before disturbing existing installation, and immediately after such discrepancies are discovered.

3.2 APPLICATION

A. Existing materials and equipment indicated on the drawings or in the specification to be reused shall be cleaned and reconditioned, including tightening of feeder and bus bar lugs prior to installation and reuse in the modified system.

B. Remove existing luminaries for alterations/renovations. Use mild detergent to clean all exterior and interior surfaces; rinse with clean water and wipe dry. For each luminarie that is taken down for alteration and then reinstalled, replace damaged parts, provide new lamps and, with matching paint, touch-up scratched or abraded areas, and replace cracked, broken or missing lenses or diffusers. Replace unrepairable fixtures with new fixtures.

C. Material and equipment removed that is not to be salvaged for Owner's use or for reuse on the project shall become the property of the Contractor and shall be removed from the site.

D. Prior to start of construction, Contractor shall walk areas to be renovated with Owner to identify and document items to be salvaged for Owner’s use.

E. Material or equipment salvaged for Owner's use shall be carefully handled and stored where directed by the Owner.

F. Materials and equipment not indicated to be removed or abandoned shall be reconnected to the new system.

G. Clean and repair existing materials and equipment that remain or are to be reused.

H. Panelboards Reused and Modified for Renovation: Clean exposed surfaces and check tightness of electrical connections. Replace damaged circuit breakers and provide closure plates for vacant positions. Provide typed circuit directory showing revised circuiting arrangement.

3.3 SEQUENCING AND SCHEDULING

A. Coordinate utility service outages with Utility Company, Architect and Owner.

B. Provide temporary wiring and connections to maintain existing systems in service during construction. When work must be performed on energized equipment or circuits use personnel experienced in such operations.

C. Existing Electrical Service: Refer to drawings for work in remodeled areas. Where facilities in these areas are to remain in service, any related work to keep the facilities in operation is specified in this Division. Maintain existing system in service until new system is complete and ready for service. Disable system only to make switchovers and

connections. Obtain written permission from Owner at least 10 business days before partially or completely disabling system. Minimize outage duration. Make temporary connections to maintain service in areas adjacent to work area. Disclose the extent, exact time and expected duration of the outage in a written request to the Owner.

D. Remove and replace existing conduit, wiring, outlets, devices, lighting fixtures, panels and appurtenances as occasioned by new or remodeled construction. Re-establish service to lights, switches and devices that may be interrupted by remodeled construction.

E. Disconnect electrical systems in walls, floors and ceilings scheduled for removal. When outlets are removed, wire shall be pulled out of the conduit back to the nearest remaining box or cabinet.
1. Remove exposed conduit that has been abandoned.
2. Cap conduit beyond the finish line.
3. Provide unswitched circuit leg for emergency battery powered equipment; circuit from same branch circuit breaker as switched normal lighting circuit.

F. Where new/existing luminaries or devices are shown being connected to existing circuits:
1. Field verify existing system voltage
2. Provide ballast / device to match system voltage

G. Verify the loading of each circuit affected by remodeling work. The maximum load of any branch circuit shall not exceed 80% of its rating.

H. Remove equipment, systems, conductors, wiring, raceways, etc. abandoned or not required for existing or new systems. Coordinate with Architect / Owner for salvage by Owner. Remove abandoned / not required raceways and wiring back to nearest box serving load to remain, or back to panel if not serving remaining load.

I. Existing Power, and Lighting and Appliance Branch Circuit Distribution System: Maintain existing system in service unless as noted or specified otherwise. Disable system only to make switchovers and connections. Notify Owner at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

J. Existing Lighting System: Maintain existing system in service unless as noted or specified otherwise. Disable system only to make switchovers and connections. Notify Owner at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

K. Existing Fire Alarm System: Maintain existing system in service. Disable system only to make switchovers and connections. Notify Owner and local fire service at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

L. Existing Telephone System: Maintain existing system in service. Disable system only to make switchovers and connections. Notify Owner and Telephone Company at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

M. Existing Paging and Sound Reinforcement Systems: Maintain existing system in service. Disable system only to make switchovers and connections. Notify the Owner at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

N. Existing Data Network: Maintain existing system in service. Disable system only to make switchovers and connections. Notify the Owner at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

O. Existing Video Distribution System: Maintain existing system in service. Disable system only to make switchovers and connections. Notify the Owner at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

P. Existing Security System: Maintain existing system in service. Disable system only to make switchovers and connections. Notify the Owner at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

Q. Existing Video Surveillance System: Maintain existing system in service. Disable system only to make switchovers and connections. Notify the Owner at least 72 hours before partially or completely disabling system. Minimize outage duration. Make connections to maintain service in areas adjacent to work area.

3.4 DEMOLITION AND EXTENSION OF EXISTING ELECTRICAL WORK

A. The Contractor shall modify, remove, and/or relocate all materials and items so indicated on the drawings or required by the installation of new facilities. All removals and/or dismantling shall be conducted in a manner as to produce maximum salvage. Salvage materials shall remain the property of the Owner and shall be delivered to such destination as directed by the Owner's representative unless they are not wanted, then it will be the responsibility of this Contractor to remove such items and properly dispose of them. Materials and/or items scheduled for relocation, and which are damaged during dismantling or reassembly operations shall be repaired and restored to good operative condition. The Contractor may, at his discretion, and upon approval of the Owner's representative substitute new materials and/or items of like design and quality in lieu of materials and/or items to be relocated.

1. Remove abandoned electrical distribution equipment, utilization equipment, outlets and accessible portions of wiring, raceway systems, and cables back to the source panelboard, switchboard, switchgear, communications closet, or cabinet. Abandoned wiring and raceways can result from actions that include the following:
    a. Equipment is removed or relocated
    b. Fixtures are removed or relocated
    c. System is no longer used
    d. There is no demonstrable near-term future use for the existing circuit or raceway system.
2. Leave abandoned electrical equipment, conductors, and material in place only if one or more of the following conditions exist:
    a. The removal requires the demolition of other structures, finishes, or equipment that is still in use. An example is abandoned conduit above an existing plaster ceiling.
    b. Removal is not feasible due to hazards, construction methods, or restricted access.
    c. Removal of abandoned conductors may damage conductors that must remain operational.
3. Remove conduits, including those above accessible ceilings, to the point that building construction, earth, or paving covers them. Cut conduit beneath or flush with building construction or paving. Plug, cap, or seal the remaining unused conduits. Install blank covers for abandoned boxes and enclosures not removed.

4. Extend existing equipment connections using material and methods compatible with the existing electrical installation and this division.
5. Restore the original fire rating of floors, walls, and ceilings after electrical demolition.
6. Use approved lock-out / tag-out procedures to control hazardous energy sources. Assure that an electrically safe work condition exists in the demolition area before beginning demolition. Where possible, disconnect the building from all sources of electrical power before beginning demolition.

B. All items to be relocated shall be carefully removed in reverse to original assembly or placement and protected until relocated. The Contractor shall clean, repair, and provide all new materials, fittings, and appurtenances required to complete the relocations and to restore them to good operative order. All relocations shall be performed by workmen skilled in the work and in accordance with standard practice of the trades involved.

C. When items scheduled for relocation and/or reuse are found to be in damaged condition before work has been started on dismantling, the Contractor shall call the attention of the Owner's representative to such items and receive further instructions before removal. Items damaged in repositioning operations are the contractor's responsibility and shall be repaired or replaced by the contractor as approved by the owner's representative, at no additional cost to the Owner.

D. Conduit and wiring to items to be removed, salvaged, or relocated shall be removed to points indicated on the drawings, specified, or acceptable to the Owner's representative. Conduit and wiring not scheduled for reuse shall be removed to the points at which reuse is to be continued or service is to remain. Such services shall be sealed, capped, or otherwise tied-off or disconnected in a safe manner acceptable to the Construction Inspector. All disconnections or connections into the existing facilities shall be done in such a manner as to result in minimum interruption of services to adjacent occupied areas. Services to existing areas or facilities that must remain in operation during the construction period shall not be interrupted without prior specific approval of the Owner's representative hereinbefore specified.

E. Disconnect abandoned outlets and remove devices. Remove abandoned outlets if conduit servicing them is abandoned and removed. Provide blank cover for abandoned outlets that are not removed. Replace existing wiring devices and cover plates with new wiring devices and new cover plates in renovated areas. Any corridor, room, or area indicated to have any new wiring devices installed shall have all of the existing wiring devices and cover plates replaced with new wiring devices and new cover plates.

F. Disconnect and remove electrical devices and equipment serving utilization equipment that has been removed.

G. Disconnect and remove abandoned luminaries. Remove brackets, stems, hangers, and other accessories.

H. Repair adjacent construction and finishes damaged during demolition and extension work.

I. Maintain access to existing electrical installations that remain active. Modify installation or provide access panel as appropriate.

J. Extend existing installations using materials and methods compatible with existing electrical installations, or as specified.

K. Existing conduit raceway found to need additional hangers installed and/or junction box

covers shall be added at no additional cost to the Owner.

L. Disconnect and remove electrical devices and equipment serving utilization equipment that has been removed.

3.5 PROTECTION OF THE WORK

A. Provide adequate temporary support and auxiliary structure as necessary to ensure structural value or integrity of affected portion of work.

B. Provide devices and methods to protect other portions of work from damage.

C. Execute fitting and adjustment of products to provide a finished installation to comply with specified products, functions, tolerances and finishes.

3.6 IDENTIFICATION OF EQUIPMENT IN RENOVATED AREAS

A. Identification of Equipment: Provide new, typed panel directory cards (and card holders if needed) for existing panelboards located within the renovated areas. Ring out all new and existing circuits within these panelboards as specified in Section 26 05 00 Electrical General Provisions. Do not include the description “existing”. Provide new nameplates for all existing electrical equipment in renovated areas as specified in Section 26 05 00 Electrical General Provisions.

3.7 TESTING AND CORRECTIVE MEASURES FOR DAMAGE DURING CONSTRUCTION IN EXISTING LOW VOLTAGE SYSTEMS

A. Pre-construction testing of existing low voltage systems:
   1. Provide a complete operational test of the following systems prior to demolition and renovation. Verify operation of each circuit, device, panel, console, distribution equipment, and associated accessories. Test shall be performed by a contractor and technicians, each certified by the respective manufacturer of the existing special system to perform test, programming, and repairs to the respective manufacturer’s system. Testing of the existing system shall include all areas served by the existing system including but not limited to the main campus, remote buildings, and temporary buildings:
      a. Paging System.
      b. Telephone System
      c. Fire Alarm System
      d. Data Network Communications System
      e. Video Distribution System
      f. Security Access Control System
      g. Video Surveillance System.
      h. Sound Reinforcement System
   2. Provide a complete written report to the Architect, indicating any deficiencies of the existing system in relation to each component’s intended function. Include in the written report evidence of current certification by the respective manufacturer for the contractor and individuals performing the tests. Provide the written report within 14 days of notice to proceed and prior to any demolition or renovation work.

B. Substantial completion testing of existing low voltage systems:
   1. Provide complete operational tests of the following systems within 14-days prior to estimated date of substantial completion. Verify operation of each circuit, device, panel, console, distribution equipment, and associated accessories. Test shall be performed by a contractor and technicians each certified by the

respective manufacturer of the existing system to perform test, programming, and repairs to the respective manufacturer's system. Testing of the existing system shall include all areas served by the existing system including but not limited to the main campus, remote buildings, and temporary buildings:

a. Paging System.
b. Telephone System
c. Fire Alarm System
d. Data Network Communications System
e. Video Distribution System
f. Security Access Control System
g. Video Surveillance System.
h. Sound Reinforcement System

2. Provide a complete written report to the Architect, indicating any deficiencies of the existing system in relation to each component's intended function. Include in the written report evidence of current certification by the respective manufacturer for the contractor and each individual performing the tests. Provide the written report within 14 days of expected date for substantial completion.

C. Repairs, equipment replacements, and corrections to low voltage systems due to damage caused by contractor:

1. Notify the Owner immediately of any disruption or damage to any low voltage system.
2. Any disruption or damage to the existing access control system or fire alarm system shall be corrected the same day as the disruption or damage occurred. The access control system and fire alarm system shall be tested daily in the presence of the owner prior to the Contractor leaving the job site each day.
3. For each low voltage system, a manufacturer certified contractor and certified technicians shall perform corrective measures to each system component that was functional prior to demolition and renovation and found defective or non-functional within 14-days prior to estimated date of substantial completion.
4. Corrective measures to all low voltage systems to correct components of the low voltage systems found damaged by the contractor shall be completed to the satisfaction of the Owner and Architect / Engineer prior to acceptance of substantial completion at no additional cost to the Owner.

END OF SECTION

SECTION 26 05 10

CONTRACT QUALITY CONTROL

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Contract quality control including workmanship, manufacturer's instructions, mock-ups and demonstrations.

1.2 QUALITY CONTROL PROGRAM

A. Maintain quality control over supervision, subcontractors, suppliers, manufacturers, products, services, site conditions and workmanship to produce work in accordance with contract documents. Submit a narrative outline of the Quality Control Program or Plan.

1.3 WORKMANSHIP

A. Comply with industry standards except when more restrictive tolerances or specified requirements indicate more rigid standards or more precise workmanship.

B. Perform work by persons qualified to produce workmanship of specified quality. Persons performing electrical work shall be required to be licensed. There shall be on-site supervision at all times, including punch list work, with that person having a minimum of journeyman license. Helpers, apprentices shall have a minimum of apprentice license.

C. Secure products in place with positive anchorage devices designed and sized to withstand stresses, vibration, and racking. Under no conditions shall material or equipment be suspended from structural bridging.

D. Provide finishes matching approved samples; all exposed finishes shall be approved by the Architect / Engineer. Submit color samples as required.

1.4 MANUFACTURER'S INSTRUCTIONS

A. Comply with instructions in full detail, including each step in sequence.

B. Should instruction conflict with Contract Documents, request clarification from Architect / Engineer before proceeding.

1.5 MANUFACTURER'S CERTIFICATES

A. When required in individual Specification Sections, submit manufacturer's certificate in duplicate, certifying that products meet or exceed specified requirements.

1.6 MANUFACTURER'S FIELD SERVICES

A. When required in individual Specification Sections, manufacturer shall provide manufacturer’s qualified personnel to observe:
   1. Field conditions
   2. Condition of installation
   3. Quality of workmanship
   4. Start-up of equipment
   5. Testing, adjusting, and balancing of equipment

B. Manufacturer's qualified personnel shall make written report of observations and recommendations to Architect / Engineer.

PART 2 - PRODUCTS

2.1 EQUIPMENT AND MATERIAL

A. Comply with recognized National rating and approval agencies as well as all codes and ordinances at the federal, state and city levels.

PART 3 - EXECUTION

3.1 ADJUSTMENTS AND MODIFICATIONS

A. Contractor shall provide all adjustments and modifications as requested by the manufacturer's qualified personnel at no additional cost to Owner.

B. Coordination Drawings:
1. Electrical room size and location required and to scale
2. Equipment and accessories, switchgear and piping
3. Indicate clearances and service access.

3.2 ELECTRICAL ACCEPTANCE TESTING

A. Perform electrical acceptance testing and inspections in accordance with the current edition of the International Electrical Testing Association (NETA), *Acceptance Testing Specification* (ATS).

B. Perform acceptance testing, inspection, function tests, and calibration to assure that installed electrical systems and components, both Contractor and user-supplied are:
1. Installed in accordance with design documents and manufacturer's instructions.
2. Tested and inspected in accordance with applicable codes and standards (e.g. NFPA 110 and NFPA 111).
3. Ready to be energized.
4. Operational within industry and manufacturer's tolerances.

3.3 INSPECTIONS BY LOCAL AUTHORITY HAVING JURISDICTION (AHJ)

A. Contractor shall notify design prime consultant and associated Architect / Owner's Construction Manager when he requests an inspection by the AHJ.

END OF SECTION

SECTION 26 05 12

ELECTRICAL SHOP DRAWINGS, COORDINATION DRAWINGS & PRODUCT DATA

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Prepare submittals as required by Division 01 and as outlined below.

B. Provide individual submittals based on the project specification section number and description and only items specified or required in that specific project specification section.

C. Submit product data shop drawings only for the following items indicated below when included as part of the project specifications, and for items specifically requested elsewhere in the Contract Drawings and Specifications. Architect / Engineer reserves the right to refuse shop drawings not requested for review, typically for basic materials and commodity off-the-shelf materials, and/or to imply that materials shall be provided as specified without exception.

D. The term submittal, as used herein, refers to all:
1. Shop Drawings
2. Coordination Drawings
3. Product data

E. Submittals shall be prepared and produced for:
1. Distribution as specified
2. Inclusion in the Operating and Maintenance Manual, in the related O&M manual section.

1.2 ARCHITECT / ENGINEER REVIEW OF SUBMITTALS

A. The Architect / Engineer will:
1. Review requested submittals with reasonable promptness. Specific equipment submittal within a materials specification section that may be required to be expedited shall be submitted separately without other submittal items not requiring the same prompt attention.
2. Affix stamp and initials or signature and indicate requirements for resubmittal or exceptions to submittal as submitted.
3. Return submittals to Contractor for distribution or for resubmission.

B. Review of submittals will not extend to design data reflected in submittals that is peculiarly within the special expertise of the Contractor or any party dealing directly with the Contractor.

C. Architect / Engineer's review is only for conformance with the design concept of the project and for compliance with the information given in the contract.
1. The review shall not extend to means, methods, sequences, techniques or procedures of construction or to safety precautions or programs incident thereto.
2. The review shall not extend to review of quantities, dimensions, weights or gauges, fabrication processes, or coordination with the work of other trades.

D. The review of a separate item as such will not indicate approval of the assembly in which the item functions.

1.3 SUBSTITUTIONS

A. Do not make requests for product or material substitution employing the procedures of this Section. The procedure for making a formal request for substitution is specified in Division 01.

PART 2 - PRODUCTS

A. Each individual submittal shall be an individual specific electronic data file with the file name resembling the product specification section number and title. Refer to Division 01 for additional data file format and media requirements.

PART 3 - EXECUTION

3.1 SPECIFICATION COMPLIANCE REVIEW

A. Do not submit an outline form of compliance, submit a complete copy with the product data.

B. Mark up a complete copy of the complete specification section for the product to indicate a) acknowledgement of the specification requirement (Comply), or b) acknowledgement that the particular specification requirement does not apply to this specific project (Not Applicable) or, c) acknowledgement that the specification requirement cannot be made or that a variance is being submitted for review to the Architect / Engineer / Owner (Does Not Comply, Explanation:).

C. Variances for roduct ot materials typically include updated model numbers or updated versions of the specified product from the same manufacture or an equal or better product from the approved manufactures list. Substutions from manufacture's not on the approved manufacture's will not be reviewed unless prior approval using one of the procedures for substitutions or changes in the contract documents are followed as requried in Division 01.

3.2 COMPOSITE COORDINATION DRAWINGS

A. Produce a set of composite coordination drawings for above ceiling, below ceiling, and below floor of electrical, mechanical, and technology equipment rooms and equipment yards for review and comment within four (4) weeks of receipt of Owner's official Notice to Proceed. Show coordination of items including but not limited to structural and architectural elements, all mechanical and plumbing piping, ductwork, equipment, electrical conduit, low voltage communications and safety/security systems cabling, cable trays, lighting, electrical switchgear, generators and UPSs, and any public or private building utility services.
   1. Prepare the composite plans at one-quarter inch (1/4") equals one-foot scale. Include larger scale sections with vertical elevations of elements as required to confirm coordinate of all elements.
   2. For each room containing major electrical switchgear and each outside equipment area with major electrical switchgear and other equipment also include NEC working space, NEC equipment space, and NEC access to NEC working space, and housekeeping pad location and dimensions.
   3. Prepare coordination drawings to coordinate installations for efficient use of available space allowing for future additional equipment wherever possible, for proper sequence of installation, and to resolve conflicts. Coordinate with work specified in other sections and other divisions of the specifications.
   4. Identify field dimensions. Show relation to adjacent or critical features of work or products.

B. Submit composite coordination shop drawings in plan, elevation and sections, showing receptacles, outlets, electrical and telecommunication devices in casework, cabinetwork and built-in furniture.
   1. Verify location of wiring devices and outlets, communication devices and outlets, safety and security devices, and other work specified in this Division.
   2. Coordinate with drawing details, site conditions, composite coordination drawings, and millwork other equipment shop drawings prior to installation.
   3. Submit coordination and shop drawings prior to rough-in and fabrication.

3.3 EQUIPMENT SHOP DRAWINGS AND PRODUCT DATA

A. Submittals shall not be combined or bound together with any other material submittal. Do not submit entire product catalogs, submit only specific data sheets indicating required product information and available product options or accessories.

B. Submittal Specification Information:
   1. Every submittal document shall bear the following information as used in the project manual:
      a. The related specification section number
      b. The exact specification section title
      c. Additional identifiers as required in Division 01.
   2. Submittals delivered to the Architect / Engineer without the specified information will not be processed. The Contractor shall bear the risk of all delays, as if no submittal had been submitted or delivered.

C. All product options specified shall be clearly indicated on the product data submittal. All options listed on the standard product printed data not clearly identified as either part of or not part of the product data submitted shall become part of the Contract and shall be assumed to be provided with the product submitted.

D. Mark each copy of standard manufacture’s printed data to identify pertinent products, referenced to specification section and article number.

E. Show reference standards, performance characteristics and capacities; wiring diagrams and controls; component parts; finishes; dimensions and required clearances.

F. Modify manufacturer's standard schematic drawings and diagrams to supplement standard information and to provide information specifically applicable to the work. Delete or strike through information not applicable.

G. Submit drawings in a clear and thorough manner. Identify details by reference to sheet and detail, schedule, or room numbers shown on Contract Drawings.

H. Show all dimensions of each item of equipment in its to be installed assembled condition with all components assembled. Include a series of drawings of individual components as necessary for reference.

I. Identify field dimensions; show relation to adjacent or critical features or work or products.

J. Submit individually bound shop drawings and product data for the following when specified or provided.

K. The Fault Current and Overcurrent Device Coordination Analysis shall be submitted prior to other electrical switchgear dependent on the results of the study for specific product selection by the vendor or contractor for compliance with the study.
   1. The emergency life safety power system equipment shall be fully coordinated as

required by the NEC.

2. The AIC and WCR ratings of all products meet or exceed the available fault current at that equipment's location.
3. Electrical systems other than life safety power systems shall be coordinated as much as practicable while reducing arc flash energy as much as practical.

L. Required submittals when products are indicated or specified:

1. Fault Current and Overcurrent Device Coordination Analysis. Submit this analysis at a minimum of three (3) weeks prior to any overcurrent device submittal to allow review for modifications to overcurrent device product selection submittal based on the manufacture's analysis and recommendations. Manufacture's recommendations for code compliance equipment fault tolerance are a project requirement and shall be provided at no additional cost to the Owner. Manufacture's recommendations for arc flash reduction that result in no additional cost to the Owner shall be provided. Manufacture's recommendations for arch flash reduction which would result in additional cost to the Owner are considered recommendations only and will be reviewed by the Engineer during the submittal review and may or may not result in changes to the specified or submitted equipment.
2. Enclosed Switches, non-fused, fused, or circuit breaker
3. Panelboards
4. Load centers
5. Wiring devices
6. Lighting fixtures
7. Lighting Controls
8. Surge Protection Devices
9. Transformers
10. Electrical Contactors
11. Enclosed Motor Controllers
12. Site Lighting Photometrics, Poles, and Fixtures
13. Switchboards, including renewal components for existing switchboards.
14. Elevator Power Module fused switches.
15. Fuses
16. Recessed floor boxes and fittings
17. Metering equipment for building management energy monitoring, usage, IECC compliance
18. Modular metering equipment for multi-tenant utility electrical services
19. Emergency/Standby generators
20. Automatic transfer switches
21. Manual transfer switches with or without integral generator docking stations
22. Remote generator docking stations
23. Emergency lighting inverters
24. Theatrical Lighting Systems
25. Architectural Dimming Systems
26. Electrical cable trays
22. Sports Lighting Equipment, Photometrics, Fixtures, and Poles
27. Surface Raceways
28. Electrical controls and time switches
29. Motor control centers, including renewal components for existing motor control centers
30. Busway
31. Uninterrupted Power Supply systems
32. Power quality improvement filters or capacitors
33. Lightning protection system
34. Fire Rated Cables and Connectors
35. Low Voltage Switchgear

36. Medium Voltage Cable and Connectors
37. Medium Voltage Switchgear

3.4 MANUFACTURERS INSTRUCTIONS

A. Submit Manufacturer's instructions for storage, preparation, assembly, installation, start-up, adjusting, calibrating, balancing and finishing.

3.5 CONTRACTOR RESPONSIBILITIES

A. Review, make corrections or annotations for clarification of manufacturer supplied data, stamp and sign submittals prior to transmittal.

B. Determine and verify:
1. Field measurements
2. Field construction criteria
3. Manufacturer's catalog numbers
4. Conformance with the Contract Documents

C. Coordinate submittals with requirements of the work and of the Contract Documents.

D. Notify the Architect / Engineer in writing at time of submission of any deviations in the submittals from requirements of the Contract Documents.

E. Do not fabricate products, or begin work for which submittals are required, until such submittals have been produced and bear contractor's stamp of acceptance or approval. Do not fabricate products or begin work until return of reviewed submittals with Architect / Engineer's acceptance.

F. Contractor's responsibility for errors, omissions, or un-approved substitutions in submittals is not relieved whether Architect / Engineer reviews submittals or not.

G. Contractor's responsibility for deviations in submittals from requirements of Contract Documents is not relieved whether Architect / Engineer reviews submittals or not, unless Architect / Engineer gives written acceptance of the specific deviations identified by the Contractor on reviewed documents.

H. Submittals shall show sufficient data to indicate complete compliance with Contract Documents:
1. Proper sizes and capacities
2. That the item will fit in the available space in a manner that will allow proper service; manufacture’s and code required clearances.
3. Construction methods, materials and finishes

I. Schedule submissions at least 15 days before date reviewed submittals will be needed by the Contractor for processing or for making corrections for re-submittal.

J. General and Electrical Contractor’s Stamp of Approval
1. The general contractor and the electrical contractor shall stamp and sign each document certifying to the review of products, field measurements and field construction criteria, and coordination of the information within the submittal with requirements of the work and of Contract Documents.
2. Contractor's stamp of approval on any submittal shall constitute a representation to Owner and Architect / Engineer that Contractor has either determined and verified all quantities, dimensions, field construction criteria, materials, catalog numbers, and similar data or assumes full responsibility for doing so, and that

Contractor has reviewed or coordinated each submittal with the requirements of the work and the Contract Documents.

3. Do not deliver any submittals to the Architect / Engineer that do not bear the Contractor's stamp of approval and signature.
4. Submittals delivered to the Architect / Engineer without Contractor's stamp of approval and signature will not be processed. The Contractor shall bear the risk of all delays, as if no submittal had been delivered.

3.6 SUBMISSION REQUIREMENTS

A. Make submittals promptly in accordance with approved schedule, and in such sequence as to cause no delay in the Project or in the work of any other Contractor. Product and equipment related to site work or other trades which require extensive rough-in, foundations, or structural support shall be submitted as soon as possible after given notice to proceed with construction.

B. Number of submittals required:
1. Coordination Drawings: Submit one electronic data file (pdf) and three opaque reproductions or coordination drawings.
2. Product Data: Submit electronic data PDF files. Refer to Division 01 for specific requirements. PDF files that are 20MB or larger may indicate that a submittal includes information not specifically relevant to the specific product being provided, information not required for the review of the specific product such as a complete product catalog or catalog section. Contractor shall include only the product data required to review the specific products characteristics for compliance with the contract documents.

C. Accompany submittals with transmittal letter containing:
1. Date
2. Project title and number
3. Contractor's name, address and contact information.
4. The number of each Shop Drawing, Project Datum and Sample submitted
5. Other pertinent data as required in Division 01.

D. Submittals shall include:
1. The date of submission
2. The project title and number
3. Contract Identification
4. The names of:
   a. Contractor
   b. Subcontractor
   c. Supplier
   d. Manufacturer
5. Identification of the product
6. Field dimensions, clearly identified as such
7. Relation to adjacent or critical features of the work or materials
8. Applicable standards
9. Identification of deviations from contract documents
10. Suitable blank space for General Contractor and Architect / Engineer stamps
11. Contractor's signed and dated Stamp of Approval.

E. Coordinate submittals into logical groupings to facilitate interrelation of the several items.
1. Finishes which involve Architect / Engineer selection of colors, textures or patterns
2. Associated items requiring correlation for efficient function or for installation

3.7 RESUBMISSION REQUIREMENTS

A. Make resubmittals under procedures specified for initial submittals. Re-submittals shall be a complete submittal as if it were the initial submittal unless otherwise instructed in the review comments on the original submittal.
   1. Indicate that the document or sample is a resubmittal
   2. Identify changes made since previous submittals

B. Indicate any additional changes which have been made by the contractor other than those requested by the Architect / Engineer.

END OF SECTION

SECTION 26 05 19

CONDUCTORS AND CONNECTORS – 600 VOLT

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Provide electrical conductors, wire and connector work as shown, and specified.

B. Types: The types of conductors and connectors required for the project include the following:
   1. 600V building conductors
   2. 600V building conductor connectors

C. Application: The applications for conductors and connectors required on the project are as follows:
   1. Power distribution circuitry
   2. Lighting branch circuitry
   3. Appliance, receptacle, and equipment branch circuitry
   4. Motor branch circuitry
   5. Control wiring
   6. Line voltage

D. Refer to other specific specification sections for voice, video, data, alarm and instrumentation cables.

1.2 QUALITY ASSURANCE

A. UL Label: Conductors and connectors shall be UL labeled.

1.3 REFERENCES

A. Refer to other specific specification sections regarding specialized wiring and connections.

PART 2 - PRODUCTS

2.1 CONDUCTORS AND CONNECTORS

A. General: Except as indicated, provide conductors and connectors of manufacturer's standard materials, as indicated by published product information, designed and constructed as instructed by the manufacturer, and as required for the installation.

B. Conductors: Provide factory-fabricated conductors of the size, rating, material, and type as indicated for each use. Conductors shall be soft or annealed copper wires meeting, before stranding, the requirements of ASTM B 3, Standard Specification for Soft or Annealed Copper Wire for Electrical Purposes, latest edition.
   1. Conductors for control wiring sized #14 AWG through #10 AWG shall be stranded.
   2. Conductors for power and lighting shall be stranded. Stranding shall be Class B meeting the requirements of ASTM B 8, Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium Hard, or Soft.

C. Insulation for standard building conductors: Insulation shall meet or exceed the requirements of UL 83, Standard for Thermoplastic Insulated Wires.

1. All wiring inside lighting fixtures shall be temperature rated per NEC.
2. Insulation for copper conductors shall be UL Type THHN/THWN, 90 degrees C.

D. Insulation for 2-hour fire rated power cables: Insulation shall meet or exceed the requirements of UL 2196 Fire Test for Electrical Circuit Protection Systems, and UL 44, Standards for Fire Resistive Cable. Conductor ampacity shall be based on 75C. Combination UL Type insulation types are permissible where the required UL Type is part of the combination UL listing.
1. Conductors installed underground: Insulation for underground fire rated conductors shall be wet location, UL Type RHW 75 degrees C, or UL RHW-2 90 degrees C.
2. Conductors installed above ground: Insulation for above ground fire rated conductors shall be UL Type RHH 90C or RHW 75C or UL RHW-2 90C.
3. Electrical Circuit Protective Systems (FHIT) – System 27 of the UL Fire Resistance Directory

E. Cable Lubricant: Fire resistant, nonflammable, water-based type for standard building conductors. Provide cable lubricants for fire rated cables as recommended by the cable manufacturer.

2.2 COLOR CODES FOR CONDUCTORS FOR BRANCH CIRCUITS AND FEEDERS

A. Color coding for conductors as required by NEC 210.5. Color coding for phase and voltage shall be as required by local codes and local standards. Where such standards do not exist, color coding shall be as follows:

Color Code Table	**USE CONTINUOUS COLOR CODED INSULATION THROUGHOUT**					
System/ Phase	**A**	**B**	**C**	**N**	**G**	**IG**
120/208 3 Ph	Black	Red	Blue	White	Green	Green/Yellow Stripe
120/240 3 Ph	Black	Orange	Blue	White	Green	Green/Yellow Stripe
120/240 1 Ph	Black	N/A	Blue			
277/480	Brown	Purple	Yellow	Gray	Green	Green/Yellow Stripe

Notes to Color Code Table:
1. 120/208, 120/240, and 277/480 Volt Systems shall be routed in separate raceways.
2. Switched legs of phase conductors for lighting and appliance branch circuits shall be of the same color as described above throughout the entire circuit.
3. Conductors shall be the same color from breaker to device or outlet.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General: Install electrical conductors and connectors as shown, in accordance with the manufacturer's written instructions, the requirements of NEC, the NECA Standard of Installation, and industry practices.

B. Coordination: Coordinate conductor installation work with electrical raceway and

equipment installation work, as necessary for interface.

C. Conductors:

1. Provide a grounded (neutral) conductor for each branch circuit. Do not share grounded (neutral) conductors.
2. No more than six phase conductors shall be installed in a single raceway. Any combination of phase conductors and grounded (neutral) conductors in any raceway shall not exceed nine.
3. When any combination of four or more phase and grounded (neutral) conductors are installed in a raceway, the minimum size for all conductors including equipment ground conductor shall be #10 AWG, and they shall be de-rated accordingly.
4. When more than four (4) conductors are size #10 AWG, they shall be installed in a one-inch conduit.
5. Pull conductors together when more than one is being installed in a raceway. Whenever possible, pull conductors into their respective conduits by hand. Use pulling lubricant when necessary.
6. Before any conductor is pulled into any conduit, thoroughly swab the conduit to remove foreign material and to permit the wire to be pulled into a clean, dry conduit.
7. Run feeders their entire length in continuous section without joints or splices.
8. No wire smaller than #12 AWG shall be permitted for any lighting or power circuit. No wire smaller than #14 AWG shall be used for any control circuit, unless shown otherwise.
9. Provide the same size wire form the panelboard to last outlet on circuit. For 20 amp branch circuits operating at 150V or less, provide #10 AWG wire when the first outlet is over 75-feet from the panelboard. For branch circuits operating at 150 to 600 volts, provide #10 AWG wire when the first outlet is over 150-feet from the panelboard.
10. Branch circuit voltage drop shall not exceed 3% of rated voltage.
11. No tap or splice shall be made in any conductor except in outlet boxes, pull boxes, junction boxes, splice boxes, or other accessible locations. Make taps and splices using an approved compression connector. Insulate taps and splices equal to the adjoining conductor. Make splices or taps only on conductors that are a component part of a single circuit, protected by approved methods. Taps or splices in feed through branch circuits for connection to light switches or receptacles shall be made by pigtail connection to the device.
12. Support conductors in vertical raceways, as required by the NEC.
13. Do not permit conductors entering or leaving a junction or pull box to deflect to create pressure on the conductor insulation.
14. Make joints in branch circuits only where circuits divide. These shall consist of one through circuit to which the branch from the circuit shall be spliced.
15. Make connections in conductors up to a maximum of one #6 AWG wire with two #8 AWG wires using twist-on pressure connectors of required size.
16. Make connections in conductors or combinations of conductors larger than specified using cable fittings of type and size required for specific duty.
17. After a splice is made, insulate entire assembly with UL-approved insulating tape to a value equivalent to the adjacent insulation.
18. Make splices and connections in control circuit conductors using UL-approved solderless crimp connectors.
19. All conduits shall be installed with an insulated grounding conductor per NEC 250.122. Where green conductor insulation is not available, the ground conductor shall be identified with green phasing tape at all accessible locations.
20. Neatly train and lace wiring inside boxes, equipment and panelboards. Provide tie-straps around conductors with their shared neutral conductor where there are more than two neutral conductors in a conduit.

21. Clean conductor surfaces before installing lugs and connectors.
22. Make splices, taps and terminations to carry full ampacity of conductors with no perceptible temperature rise.
23. Provide stranded conductors connected with pressure type connectors / compression fittings and terminal lugs UL listed for the type of conductor used (AL-CU) and correctly sized to the diameter of the bare conductors.
24. Run mains and feeders their entire length in continuous pieces without splices or joints.
25. Color code conductors.
26. Do not install a pull string in conduits containing conductors.
27. Conductors shall be the same color from load side of overcurrent protection device to outlet or utilization equipment.
28. Spare conductors shall not be installed in any conduit, gutter, raceway, panel or enclosure unless noted otherwise.

D. Identification: Label each phase conductor in each junction box with corresponding circuit number, using self-adhesive wire markers.

E. Splices and Joints:
1. In accordance with UL 486A, C, D, E, and NEC.
2. Aboveground Circuits (No. 10 AWG and smaller):
   a. Connectors: Solderless, screw-on, reusable pressure cable type, rated 600 V, 220˚ F, with integral insulation, approved for copper and aluminum conductors.
   b. The integral insulator shall have a skirt to completely cover the stripped wires.
   c. The number, size, and combination of conductors, as listed on the manufacturers' packaging, shall be strictly followed.

F. Aboveground Circuits (No. 8 AWG and larger):
1. Connectors shall be indent, hex screw, or bolt clamp type of high conductivity and corrosion resistant material, listed for use with copper and aluminum conductors.
2. Provide field-installed compression connectors for cable sizes 250 kcmil and larger with not less than two clamping elements or compression indents per wire.
3. Insulate splices and joints with materials approved for the particular use, location, voltage, and temperature. Splice and joint insulation level shall be not less than the insulation level of the conductors being joined.
4. Plastic electrical insulating tape: Per ASTM D2304, flame-retardant, cold and weather resistant.

G. Underground Branch Circuits and Feeders:
1. Submersible connectors in accordance with UL 486D, rated 600 V, 190˚F, with integral insulation.

3.2 TESTING

A. Pre-Energization Check: Before energizing, check cable and conductors for circuit continuity and short circuits. Correct malfunctions.

B. Service Entrance and Feeder Insulation Resistance Test: Each main service entrance conductor and each feeder conductor shall have its insulation resistance tested after the installation is complete except for connection at its source and point of termination. Testing shall be performed by qualified technicians who have been trained in testing procedures and in the use of all test equipment.
1. Make tests using a Biddle Megger or equivalent test instrument at a voltage of

not less than 1000 VDC; measure resistance from conductor to conductor, conductor to neutral (if present) and from conductor to ground. Insulation resistance shall not be less than the following:

Wire Size (AWG)	Insulation Resistance (Ohms)
#8	250 K
#6 through #2	100 K
#1 through #4/0	50 K
Larger than #4/0	25 K

2. Conductors that do not meet or exceed the insulation resistance values listed above shall be removed, replaced, and retested.

C. Submittals: Contractor shall furnish instruments and personnel required for tests. Submit 4 copies of certified test results to Architect for review. Test reports shall include conductor tested, date and time of test, relative humidity, temperature, and weather conditions.

D. Voltage and Current Values: The voltage and current in each conductor shall be measured and recorded after connections have been made and the conductor is under load.

SAMPLE DC HIGH VOLTAGE CABLE TEST REPORT
(Specification Paragraph 3.2, C)

Date_____

Contract and Work Location: ___
Contract (Project) No.: _
Circuit Identification: ___
(Dwg., Title, Number and Ckt. Number)

Test Equipment: _____
(Make, Model, Serial No., Etc.)
Applied Test Voltage _____
Normal Oper. Voltage _____
Cable Installation: New _____ Used _____
(Date) (No. Years)
Cable Size _____AWG
Cable Length _____Ft.
Cable Material _____Cu _____Al
Temperature _____ Humidity _____

TEST DATA - RESISTANCE IN KILO OHMS

CONDUCTOR PER PHASE	A-N	B-N	C-N	A-G	B-G	C-G	A-B	B-C	A-C

END OF SECTION

SECTION 26 05 27

EXPANSION OF EXISTING ELECTRICAL GROUNDING SYSTEM

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Grounding shall conform to the requirements of:
   1. National Electrical Code
   2. Governing local codes
   3. Local Utility Company

B. Ground effectively and permanently.
   1. Verify existing neutral conductor bonding at the main service disconnect and at other new/relocated or reused separately derived systems.
   2. All new/relocated conduit or cable tray systems and busway
   3. All new/relocated electrical equipment and related current carrying supports or structures
   4. All new / relocated metal piping systems
   5. All new building structural metal frames

1.2 REFERENCE STANDARDS

A. ANSI/IEEE Standard 142 - "Recommended Practice for Grounding of Industrial and Commercial Power Systems."

B. ANSI/UL 467 - "Safety Standard for Grounding and Bonding Equipment."

C. Article 250 of the NEC (NFPA 70) for grounding.

D. NECA – Standard of Installation

E. NETA ATS – Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems

F. EIA / TIA 607

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Copperweld

B. nVent ERICO

C. Burndy

D. O.Z. Gedney

E. Eaton

2.2 GROUNDING ELECTRODES

A. Driven Rod Electrode

1. 3/4" x 10'-0" copper clad grounding electrode, UL listed
2. UL listed grounding electrode connector
3. Approved thermal fusion methods (exothermic)

B. Metal Frame of Building

C. Existing grounding electrode system

2.3 DRIVEN ELECTRODE ACCESS BOX AND COVER

A. Hubbell Tier 22 FRP 20-inch round bolt down cover with “GROUND” embossed on top.

2.4 MATERIALS AND COMPONENTS

A. Reference other sections of this specifications for materials specified there.

B. Heavy-duty, copper, two bolt type, copper alloy or bronze compression lugs for grounding and bonding applications, in configurations required for particular installation.

PART 3 - EXECUTION

3.1 SYSTEMS 600 VOLTS OR LESS

A. In the existing service equipment, field verify existing condition of ground bus.
1. Field verify existing bond of the ground bus to the existing service grounding conductor, to the neutral bar.
2. Tighten existing ground lugs and connections.

B. Connect the grounding electrode conductor between the ground bus and the grounding electrode system.
1. In rigid PVC conduit.
2. Provide thermo fusion connection for each rod ground electrode.
    a. All rod electrodes shall be located outside the building in non-paved areas where available. Access cover top shall be flush with finish grade or floor.
    b. Install rod electrodes as indicated. Install additional rod electrodes as required to achieve specified resistance to ground.
    c. The minimum distance between driven ground rod electrodes shall be 10'.
3. The total ground resistance shall not exceed 10 Ohms for service entrance grounds and for equipment grounds.
    a. Where this condition cannot be obtained with one electrode, install a longer electrode, deep-driven sectional electrodes, or additional grounding electrodes until the required ground resistance is obtained.
    b. Refer to drawings for project specific ground resistance requirements.

C. Field verify the grounding electrode conductor between the ground bus and the grounding electrode systems are in compliance with the NEC.

D. Provide an insulated grounding conductor inside all new conduits, raceways, surface raceways and cables used for power distribution. The ground wire shall be bonded to each box. All bonding jumpers shall be routed inside conduit or raceway.

E. Provide an insulated, isolated equipment grounding conductor in addition to the insulated equipment grounding conductor for all isolated grounding feeders, branch circuits, outlets and receptacles.

F. Provide all new/relocated conduits terminating in switchgear, transformers, switchboards, and panelboards with grounding bushings, where required and ground wire extended to ground bus in equipment.

G. Where modifications to the main service disconnect are required, main bus and building grounding electrode conductor installation shall be witnessed by the Architect / Engineer.

H. Interface with lightning protection system when lightning protection system is specified.

I. Locate and install anchors, fasteners, and supports in accordance with NECA “Standard of Installation”.

J. Do not fasten supports to pipes, ducts, mechanical equipment, or conduit.

K. Do not use spring steel clips and clamps.

L. Do not use powder-actuated anchors.

M. Do not drill or cut structural members.

N. Do not use compression or mechanical connectors underground.

3.2 MISCELLANEOUS REQUIREMENTS

A. Continuity of the building equipment grounding system shall be maintained throughout the project. Grounding jumpers shall be inside conduit, fittings and boxes and shall be installed across conduit expansion fittings, liquid-tight flexible metal and flexible metal conduit, light fixture pigtails in excess of 6', and other non-electrically continuous raceway fittings.

B. Grounding conductors and grounding electrode conductor shall be stranded copper conductors and run in a suitable PVC raceway. Grounding conductors and grounding electrode conductor shall be continuous, without joints or splices over their entire length, except as allowed by NFPA 70/NEC.

C. For separately derived alternating current system grounds, bond the case and neutral of each transformer secondary winding directly to the nearest available effectively grounded structural metal member as required in NEC 250.

D. Technology/Data/Voice Communications, CATV, CCTV, and MATV Equipment Grounding: Provide grounding electrode conductor from the communications service equipment to the building grounding system as required. Provide #6 ground conductor from telephone/voice/CATV/data company demarcation point to building electrical service entrance ground electrode connection and as required by all local utility companies.
   1. New MDF Closets Telecommunications Main Ground Bar (TMGB): Provide Erico Cadweld #B544A028 ground bar with 7/16-inch holes, wall mounted to the telecommunications plywood backboard. Provide one #3 AWG insulated ground conductor from ground bar to building steel. Provide #2/0 AWG insulated ground conductor to the building electrical service ground at the main electrical service disconnect.
   2. New IDF Closets Telecommunications Ground Bar (TGB): Provide Erico Cadweld #B542A004 ground bar with 7/16-inch holes, mounted to the telecommunications plywood backboard. Provide one #6 AWG insulated ground conductor from ground bar to building steel.
   3. Provide #2/0 AWG insulated ground conductor between each TMGB and all

TGBs.

4. Provide #2/0 AWG insulated ground conductor from TMGB to electrical service ground bus at main electrical service switch.
5. Bond each equipment rack with #6 AWG insulated ground conductor to the TMGB / TGB.
6. Route TMGB – TGB ground conductor using the shortest route practical with long radius curves.

E. Ground new and removed/replaced lighting fixture bodies to the conduit grounding system.

F. Receptacles: Provide a ground wire bonded to the conduit ground system, except where and insulated isolated grounding receptacle is specified.

G. Motor Frames: Ground the frame of each motor with a properly sized separate ground wire around flexible conduit.

H. Provide grounding access well for each driven ground electrode, not located in manholes or pull boxes.
1. Access well top shall be flush with finish paved surfaces.
2. Ground access wells located in non-paved areas shall be set two-inches above surrounding finished grade. Provide 12-inch wide by 8-inch deep reinforced concrete crown around neck or opening and sloped down away from pull box opening.
3. Provide thermal fusion (exothermic) connectors approved for direct burial.

I. Ground all light poles and all exterior metal structures supporting conduit, switchgear, or light fixtures.

J. Exterior Electrical Equipment Racks:
1. Provide driven ground electrode for racks mounted remote from building structure.
2. Where mounted on roof, ground to be building structural steel.

K. Ground connections to building steel, grounding electrodes and all underground connections shall be by thermal fusion (exothermic).

L. Transformers: Provide driven ground electrode and building steel electrode at each transformer.

M. Bond hot water and cold water piping together at each domestic water heater.

3.3 COORDINATION

A. General: Coordinate installation of grounding connections for equipment with equipment installation work.

3.4 TESTING

A. Ground Resistance Test: Perform a ground resistance test for comparison to future inspection and testing data by the Owner. Test shall be performed using a Biddle Megger Earth Tester or equivalent test instrument. The test shall not be performed within 48 hours after the last rainfall.
1. Inspect and test in accordance with NETA ATS except Section 4
2. Grounding and Bonding: Perform inspections and tests listed in NETA ATS, Section 7.13

B. The Root Mean Square (RMS) AC measurements: The True RMS AC Measure test should be performed for all bonding conductors. The recommended maximum AC current value on any bonding conductor should be less than 1 ampere (A). The recommended maximum DC current value should be less than 500 milliamperes (mA). If abnormally high AC current levels are present on any bonding conductor, a dangerous faulty wiring condition likely exists within the room.

C. Two-Point Bonding Measurements: The two-Point Bonding test shall be performed for all bonding conductors. This test should be performed using an earth grounding resistance tester configured for a continuity test. The test is performed by connecting the meter leads between the nearest available grounding electrode (e.g., structural steel) and the TMGB or TGB. The recommended maximum value for the bonding resistance between these two points is 0.1 ohms (100 milliohms).

D. Submittals: Furnish instruments and personnel required for tests. Personnel shall be trained in all aspects of testing grounding systems and shall be formally trained on using all test equipment required. Submit 2 copies of certified test results for Owner's record and submit 4 copies of certified test results to Architect / Engineer for review. Test reports shall include date and time of tests, relative humidity, temperature, and weather conditions.

END OF SECTION

SECTION 26 05 33

CONDUIT SYSTEMS

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Furnish and install a complete system of electrical conduits and fittings.

1.2 REFERENCE STANDARDS

A. National Electrical Code

B. Local codes and ordinances

C. UL

D. ETL

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS – Provide products manufactured in the USA

A. Raceways:
1. Allied, International Metal Hose, Ipex, Heritage Plastics, Wheatland, Can-Tex, Carlon, Certain-Teed, Anamet, Inc., Electri-Flex Co., Western Tube and Conduit, Sentinel Conduit.
2. PVC Coated RGC: Robroy Perma Cote, Robroy Plasti-Bond, or Calbond – no exceptions
3. Stainless Steel: Robroy, Calbrite, Gibson
4. Aluminum: Penn Aluminum, American Conduit, Wheatland, Eaton B-Line, Patriot Aluminum Products
5. Reinforced Thermosetting Resin Conduit (RTRC): FRE Composites, Champion Fiberglass, United Fiberglass

B. Fittings:
1. Appleton, Crouse Hinds, Topaz, Steel City, O.Z. Gedney, Carlon, Heritage Plastics, Raco, Ipex, International Metal Hose, Lew Electric Fittings Co.
2. PVC Coated ferrous fittings: Robroy Perma Cote, Robroy Plasti-Bond, or Calbond – no exceptions
3. Stainless Steel: Robroy, Calbrite, Gibson, Crouse Hinds
4. Aluminum: Penn Aluminum, American Conduit, Wheatland, Eaton B-Line, Patriot Aluminum Products
5. Reinforced Thermosetting Resin Conduit (RTRC): FRE Composites, Champion Fiberglass

C. Condulets and Conduit Bodies:
1. Appleton, Form 85
2. PVC Coated: Robroy Perma-cote or Plasti-Bond, – no exceptions
3. Stainless Steel: Robroy, Calbrite, Gibson, Crouse Hinds
4. Reinforced Thermosetting Resin Conduit (RTRC): FRE Composites, Champion Fiberglass

D. Steel MC Cable for light fixture whips:
1. AFC

2. Southwire
3. General Cable
4. Kaf-Tech

2.2 GENERAL

A. The minimum conduit size shall be ¾-inch unless indicated otherwise in Divisions 26, 27 or 28.
   1. Branch Circuits: Minimum conduit size shall be ¾-inch.
   2. Feeder Circuits: Minimum conduit size shall be ¾-inches.
   3. Technology, telecommunications, and low voltage systems: The minimum conduit size shall be ¾-inches unless noted or indicated otherwise.
   4. The minimum conduit size between buildings for technology, voice, data, fire alarm, video, security, surveillance, BMCS, and other telecommunications shall be 2-inch unless indicated otherwise.

B. The minimum conduit size for flexible metallic conduit for tap connections to individual light fixtures shall be ½ inch, or steel metal clad (MC) cable with insulated ground conductor maximum 6 feet.

C. Electrical nonmetallic tubing, flexible polyethylene or PVC tubing shall not be used on this project.

D. BX and AC cable shall not be used on this project.

E. PVC elbows shall not be used on this project.

F. Intermediate metal conduit (IMC) shall not be used on this project.

2.3 RIGID METAL CONDUIT

A. UL labeled, Schedule 40:
   1. Mild steel pipe, zinc coated inside and out
   2. Aluminum Alloy 6063, T-1 temper
   3. Threaded ends
   4. Insulated bushings

B. Fittings shall meet the same requirements as rigid metal conduits.
   1. UL labeled
   2. Threaded fittings

2.4 ELECTRICAL METALLIC TUBING (EMT)

A. UL labeled, standard weight:
   1. Cold rolled steel tubing, zinc coated inside and out
   2. Aluminum Alloy 6005, 6063. Temper T-1

B. Fittings shall meet the same requirements as EMT conduits.
   1. UL labeled
   2. Insulated throat connectors
   3. Steel fittings with setscrews with lock nuts on threaded ends, no snap locks
   4. Cast metal fittings are not approved
   5. Uni-couple type connectors are not approved
   6. Split ring, anti-short bushings are not approved

2.5 RTRC CONDUIT FITTINGS AND CONDUIT BODIES

A. UL listed

B. Standard wall thickness sizes ¼-inch through 4-inch

C. Underground medium wall thickness sizes 5 and 6-inch

D. Conduit interface joints above grade, gasket joint below grade

E. Extra heavy wall for above ground and/or UL Class 1 Division 2 and Class 1 Zone 2 applications.

2.6 PVC COATED RIGID STEEL WITH URETHANE INTERIOR COATING

A. The PVC coated galvanized rigid conduit and fittings must be ETL Listed and Verified. The PVC coating must have been investigated and verified by ETL as providing the primary corrosion protection for the rigid metal conduit. Ferrous fittings for general service locations must be ETL Listed with PVC as the primary corrosion protection. Hazardous location fittings, prior to plastic coating must be UL listed for the hazard conditions to which they are to be used. All conduit and fittings must be new, unused material. Applicable UL standards may include UL 6 Standard for Safety, Rigid Metal Conduit, and UL514B Standard for Safety, Fittings for Conduit and Outlet Boxes.

B. The PVC coated galvanized rigid conduit and fittings must be ETL Verified to the Intertek ETL SEMKO High Temperature H_2O PVC Coating Adhesion Test Procedure for 200 hours. The PVC coated galvanized rigid conduit must bear the ETL Verified PVC-001 label to signify compliance to the adhesion performance standard.

C. The conduit shall be hot dip galvanized inside and out with hot galvanized threads.

D. A PVC sleeve extending one pipe diameter or two inches, whichever is less, shall be formed at every female fitting opening except unions. The inside sleeve diameter shall be matched to the outside diameter of the conduit.

E. The PVC coating on the outside of conduit couplings shall have a series of longitudinal ribs 40 mils in thickness to protect the coating from tool damage during installation.

F. Form 8 Condulets, ½-inch through 2-inch diameters, shall have a tongue-in-groove gasket to effectively seal against the elements. The design shall be equipped with a positive placement feature to ease and assure proper installation. Certified results confirming seal performance at 15 psig (positive) and 25 inches of mercury (vacuum) for 72 hours shall be available.

G. Form 8 Condulets shall be supplied with plastic encapsulated stainless-steel cover screws.

H. A urethane coating shall be uniformly and consistently applied to the interior of all conduit and fittings. This internal coating shall be a nominal 2 mil thickness. Conduit or fittings having areas with thin or no coating shall be unacceptable.

I. The PVC exterior and urethane interior coatings applied to the conduit shall afford sufficient flexibility to permit field bending without cracking or flaking at temperatures above 30°F (-1°C).

J. All male threads on conduit, elbows and nipples shall be protected by application of a urethane coating.

K. All female threads on fittings or conduit couplings shall be protected by application of a urethane coating.

L. Independent certified test results shall be available to confirm coating adhesion under the following conditions
   1. Conduit and condulet exposure to 150°F (65°C) and 95% relative humidity with a minimum mean time to failure of 30 days. (ASTM D1151)
   2. The interior coating bond shall be confirmed using the Standard Method of Adhesion by Tape Test (ASTM D3359).
   3. No trace of the internal coating shall be visible on a white cloth following six wipes over the coating which has been wetted with acetone (ASTM D1308).
   4. The exterior coating bond shall be confirmed using the methods described in Section 3.8, NEMA RN1. After these tests the physical properties of the exterior coating shall exceed the minimum requirements specified in Table 3.1, NEMA RN1.

M. Right angle beam clamps and U bolts shall be specially formed and sized to snugly fit the outside diameter of the coated conduit. All U bolts shall be provided with plastic encapsulated nuts that cover the exposed portions of the threads.

N. All fittings, clamps, straps, struts, and hardware used with PVC coated conduit shall be PVC coated or 316 stainless steel

2.7 STEEL FLEXIBLE CONDUIT

A. Steel flexible metallic conduit:
   1. Zinc coated inside and out
   2. 18-inches minimum length, 24-inches maximum length

B. Steel flexible metallic conduit for tap connections to light fixtures where steel MC Cable fixture whips are not used:
   1. 18 inches minimum length; 6 feet maximum length

C. Liquid tight flexible steel conduit
   1. Type L.A. - Grounded - UL Approved
   2. 18-inches minimum length, 24-inches maximum length

2.8 PVC CONDUIT

A. UL labeled Schedule 40 and Schedule 80

B. PVC fittings and solvent welded joints

C. Acceptable PVC condulet manufacturer: Ipex, Cantex

2.9 CONDULETS AND CONDUIT BODIES

A. UL Labeled

B. Form 85

C. PVC Coated: Form 8

D. LBC Condulets shall be used for size 2 inch and above.

E. LL and LR Condulets shall not be used for 2 inch and above

2.10 EXTERIOR IN-GRADE PULL BOXES

A. Enclosures, boxes and covers are required to conform to all test provisions of the most current American Association of State Highway and Transportation Officials (AASHTO) standards for H-20 loading applications.
   1. AASHTO H-20 certified precast concrete, cast iron or other AASHTO recognized materials, rated for deliberate traffic.
   2. Conduit entry knock-outs as required
   3. Bolt down galvanized steel/cast iron covers
   4. Thin wall knocks outs as required
   4. Integral bottom
   5. Box height as required for specified conduit depth and required top elevation.
   6. Concrete design strength of minimum 5,500 PSI at 28-days
   7. Place enclosures on a minimum of 6 inches of coarse gravel with a border of 6-inches beyond the enclosures exterior dimension.
   8. Size and volume as required for application.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install electrical conduits and fittings for all wiring of any type unless specifically specified or instructed to do otherwise. Install conduits and fittings in accordance with local codes and applicable sections of the NECA “Standard of Installation”, concealed where possible.
   1. Fasten conduit supports to building structure and surfaces; do not support to roof deck.
   2. Arrange supports to prevent misalignment during wiring installation.
   3. Do not support conduit with wire or perforated pipe straps. Remove wire used for temporary supports.
   4. Do not attach conduit to ceiling support wires.
   5. Arrange conduit to maintain head room and present neat appearance.
   6. Maintain 4-inch clearance between conduit and rooftop surfaces.
   7. Cut conduit square using saw or pipe cutter; de-burr cut ends.
   8. Bring conduit to shoulder of fittings; fasten securely.
   9. Conduit penetrations to all individual motor controllers, VFDs, and motor control cabinets shall only be made at the bottom of the enclosure. For other equipment, provide listed water sealing conduit hubs to fasten conduit to sides or tops of electrical equipment enclosures, device box, gutter, wireway, disconnect, etc.
   10. Use suitable caps to protect installed conduit against entrance of dirt and moisture.
   11. Ground and bond conduit as required.
   12. Identify conduit as required.
   13. Route all conduits above building slab perpendicular or parallel to building lines.
   14. Do not use no-thread couplings and connectors for galvanized steel, PVC coated galvanized steel, or aluminum rigid conduit.

B. Group related conduits; support using conduit rack. Construct rack using steel channel; provide space on each for 25 percent additional conduits.

C. In areas where raceway systems are exposed and acoustical or thermal insulating material is to be installed on walls, partitions, and ceilings, raceways shall be blocked out proper distance to allow insulating material to pass without cutting or fitting. Also provide

Kindorf galvanized steel channels to serve as standoffs for panels, cabinets and gutters.

D. Securely fasten conduits, supports and boxes, to ceiling (not roof deck), walls, with Rawl Plugs or approved equal anchors. Use lead cinch anchors or pressed anchors. Use only cadmium plated or galvanized bolts, screws. Plastic anchors and lead anchors shall not be used for overhead applications.

E. Provide separate raceway systems for each of the following when specified, indicated or required:
   1. 120/208 volt circuits
   2. 277/480 volt circuits
   3. Emergency
      a. Life safety branch
      b. Critical branch
      c. Equipment branch
   4. Voice/Data
   5. Sound reinforcement
   6. Theatrical and Architectural Dimming Controls
   7. MATV/CATV
   8. Security CCTV
   9. Security System
   10. Communications / PA Systems / Sound System Line Input and Speakers
   11. Fire Alarm
   12. Lighting Control Systems
   13. Building Management Control Systems

F. Unless shown otherwise, do not install conduit in or below concrete building slabs.

G. Unless shown otherwise, do not install conduit horizontally in concrete slabs.

H. Roof penetrations shall be made in adequate time to allow the roofing installer to make proper flashing. Conduit for equipment mounted on roof curbs shall be routed through the roof curb. Conduit, gutters, pull boxes, junction boxes, etc. shall not be routed on roof unless specified otherwise. Where specifically indicated to be routed or mounted on the roof, supports shall be as specified, as recommended by roofing manufacturer and roof support manufacturer and as required by NEC. Place supports every five feet along conduit run and within 3 feet of all bends, condulets, and junction boxes. Provide roofing pad under stands at directed by Architect and as recommended by roofing manufacturer and roof support manufacturer. Provide additional unistrut supports and accessories as required.

I. PVC coated conduit shall have all nicks and cuts to the protective coating repaired using manufacturer's approved touch-up material as recommended by manufacturer. Provide a minimum of two-wraps of 3M-50 type tape over touch-up.

J. Installation of the PVC Coated Conduit System shall be performed in accordance with the Manufacturer's Installation Manual. To assure correct installation, the installer shall be certified by Manufacturer to install coated conduit. Submit copies of training certification with submittal. Contractor shall coordinate installation with manufacturer's representative for field training and observation of installed PVC coated rigid galvanized conduit and fittings. Manufacturer's representative shall certify the installation is in accordance with manufacturer's installation instructions. Submit copies of installation certification prior to cover-up of underground installation.

K. All conduit terminations at locations including but not limited to, switchgear, pull boxes, outlet boxes, stub-up, and stub-outs:

1. Provide insulated throat connectors for EMT conduits.
2. Provide insulated bushing on all rigid conduit terminations.
3. Provide locknuts inside and outside of all boxes and enclosures.
4. Provide threaded type plastic bushing at all boxes and enclosures

L. In suspended ceilings, support conduit runs from the structure, not the ceiling system construction.
   1. Do not support from structural bridging.
   2. Do not support from metal roof deck.

M. Completely install each conduit run prior to pulling conductors. All boxes are to be accessible after completion of construction.

N. All conduits must be kept dry and free of water or debris with approved pipe plugs or caps. Cap or plug conduit ends prior to concrete pours.

O. Ream ends of conduits after cutting and application of cutting die to remove rough edges.

P. Install all above concrete slab conduits perpendicular or parallel to building lines in the most direct, neat and workmanlike manner.
   1. Cable Tension:
      a. 0.008 lb./cmil for up to 3 conductors, not to exceed 10,000 pounds.
      b. 0.0064 lb./cmil for more than 3 conductors, not to exceed 10,000 pounds
      c. 1000 lbs. per basket grip.
   2. Sidewall pressure: 500 lbs./ft.
   3. Conduit runs within the following limits of bends and conduit length between pull points shall not exceed the above installation pulling tension and sidewall pressure limits.
      a. Three (3) equivalent 90-degree bends: not more than fifty feet (50') between pull points.
      b. Two (2) equivalent 90-degree bends: not more than one hundred feet (100') between pull points.
      c. One (1) equivalent 90-degree bend: not more than one hundred fifty feet (150') between pull points.
      d. Straight pull: not more than two hundred feet (200') between pull points.
   4. Indicate sizes of conduits, wireway sections, and cable tray sections on the as-built drawings.
   5. Hold horizontal and vertical conduits as close as possible to walls, ceilings and other elements of the building construction. Conduits shall be kept a minimum of 6 inches clear of roof deck / insulation, and 2 inches clear of above floor deck / insulation.
   6. Install conduits to conserve building space and not obstruct equipment service space or interfere with use of space. Conduit shall not be routed on floors, paved areas or grade.
   7. Where a piece of equipment is wired from a switch or box on adjacent wall, the wiring shall go up the wall from the box, across at or near the ceiling, and back down to the equipment. Wiring shall not block the walkway between wall and equipment.
   8. Horizontal runs of conduit on exposed walls shall be kept to a minimum.
   9. Conduit for mechanical / plumbing equipment installed outdoors shall be routed with the associated mechanical / plumbing pipe support rack system where practical, coordinate with Divisions 22 and 23.
   10. Conduits installed in public areas, not concealed by architectural ceilings, shall be supported by galvanized steel channel racks to bottom of roof deck or floor deck. Conduits shall be grouped for neat workman-like appearance.

Q. Install expansion and deflection fittings and bonding jumpers on straight runs which exceed 200-feet, on center, and at 200-feet maximum, on center, on straight runs which exceed 400-feet, and where conduits cross building expansion joints.

R. Provide grounding bushings at concentric/eccentric knockouts or where reducing washers are used.

S. Run conduit to avoid proximity to heat producing equipment, piping surfaces with temperatures exceeding 104 degrees F., and flues, keeping a minimum of 13-inches clear.

T. Install conduit as a complete system, without conductors, continuous from outlet to outlet and from fitting to fitting. Make up threaded joints of conduit carefully in a manner to ensure a tight joint. Fasten the entire conduit system into position. A run of conduit between outlet and outlet, between fitting and fitting, or between outlet and fitting shall not contain more than the equivalent of four quarter bends, including those bends located immediately at the outlet or fitting.

U. Conceal conduit systems in finished areas. Conduit may be exposed in mechanical and electrical rooms, and where otherwise shown or indicated only. Run the conduit parallel and perpendicular to the structural features of the building and support with malleable iron conduit clamps at intervals as required by NEC or on conduit racks, neatly racked and bent in a smooth radius at corners.

V. Conduit bends shall be factory elbows or shall be bent using equipment specifically designed to bend conduit of the type used to maintain the conduit's UL listing. Conduit hanger spacing shall be 10 feet or less and as required by the NEC for all conduit. Beam clamp attachments to steel joist chords is prohibited. Beam clamps may only be used at beams, no exceptions. Connections to joists shall be made with galvanized channel extended between joist chords or with galvanized channel bearing on the vertical legs of joist chord angles.

W. Support conduit on galvanized channel, using compatible galvanized fittings (bolts, beam clamps, and similar items), and galvanized threaded rod pendants at each end of channel and secure raceway to channel and channel to structure. Where rod pendants are not used, channel supports are to be secured to structure at each end. Conduit supports are to be secured to structure using washers, lock washers, nuts and bolts or rod pendants; use of toggle bolt "wings" are not acceptable. Support single conduit runs using a properly sized galvanized conduit hanger with galvanized closure bolt and nut and threaded rod. Raceway support system materials shall be galvanized and manufactured by Kindorf, Unistrut, Superstrut, Caddy, or Spring Steel Fasteners, Inc. Provide chrome or nickel-plated escutcheon plates on conduit passing through walls and ceilings in finished areas. Do not support conduit from other conduit, structural bridging or fire rated ceiling system. Do not support more than one conduit from a single all-thread rod support. Provide electrical insulating sleeve or wrapping for aluminum conduit supported by zinc coated supports or fasteners. Channel supports shall have cut ends filed smooth. When installed outside of the building, or in areas subject to moisture, the cut ends shall be painted with ZRC galvanized paint or equivalent.

X. Terminate all motor connection conduits in mechanical room spaces with a floor pedestal and with "Tee" conduit at motor outlet height for flexible conduit.

Y. Where conduit is not embedded in concrete or masonry, conduit shall be firmly secured by approved clamps, half-straps or hangers. Tie wire and short pieces of conduit used as supports and or hangers are not approved.

Z. Where “LB” condulets are used, 2-inches and larger shall be type “LBD”.

AA. No more than 12 conduits containing branch circuits may be installed in junction boxes, pull boxes or gutters.

BB. Flexible metal conduit and liquid tight flexible metal conduit shall only be used for final connections from junction box to equipment, light fixtures, power poles, etc. They are not to be used in lieu of conduit runs. They shall not be used for wall or roof penetrations unless they are installed in a PVC coated RGC conduit sleeve at least one size larger than the OD of the flexible conduit.

CC. Where 3-1/2-inch conduit is specified and the required or specified material is Schedule 80 PVC, provide 4-inch conduit.

DD. “Daisy Chaining” light fixtures installed for lay-in ceiling areas is not allowed. Each light fixture shall have its own fixture whip from junction box. The only exception being light fixtures installed end to end using chase nipples between them, or light fixtures recessed in non-accessible ceilings.

EE. In above ceiling applications, do not install raceways, junction boxes, gutters, disconnects, etc. within 36 inches directly in front of HVAC control boxes or other equipment requiring access from a point starting from the top of control box / equipment down to ceiling.

FF. Do not install conduit, junction boxes, etc. within 18 inches of outside edges of roof access openings.

GG. Install minimum size 2-inch nipple, at least one, between multi-sectional panels for branch circuit independent of feeder conductors.

3.2 CONDUITS

A. Conduit above grade indoors:
   1. Concealed Conduits: EMT with set screw fittings
   2. Exposed conduits:
      a. Below nine feet AFF where not directly attached and against building walls, ceiling, or structure: Rigid metal conduit or x-wall RTRC.
      b. Where subject to physical damage: Rigid metal conduit or x-wall RTRC.
      c. Wet locations: PVC coated galvanized rigid steel or aluminum conduit
      d. Damp Locations: Aluminum rigid conduit or x-wall RTRC.
      e. Exposed conduits in mechanical rooms or electrical rooms shall be rigid galvanized steel or x-wall RTRC when installed below 18-inches above finished floor.

B. Conduit installed above grade outdoors:
   1. Galvanized rigid steel or x-wall RTRC for conduits up utility poles and where subject to physical damage or where located less than four feet above finished floor.
   2. Aluminum or x-wall RTRC where not subject to physical damage and where located four feet above finished floor.

C. Conduit where indicated underground:
   1. PVC Coated Galvanized rigid steel or RTRC conduit elbows and Schedule 80 PVC, RTRC, or PVC coated galvanized steel straight run conduits. PVC conduits for underground branch circuits shall be Schedule 80 or Schedule 40 PVC.
      a. PVC conduit and fittings shall be used only for straight horizontal runs

and for vertical risers at site lighting pole bases. Bending straight sections of PVC conduit to less than 25-foot radius or the use of PVC factory bends is not allowed.

b. Change in direction of conduit runs, either vertical or horizontal, shall be with RTRC or PVC coated galvanized steel elbows or long sweep bends of straight PVC conduit sections. Long sweep bends of straight PVC 20-foot sections shall have a minimum radius of curvature of 25 feet and a maximum arc of 22.5degrees. Multiple long sweep bends of straight PVC sections shall be separated by a minimum of 20-feet of straight, linear, PVC sections.

c. Provide RTRC or PVC coated rigid galvanized steel conduit elbows and fittings with urethane interior coating at all changes in direction with radius of less than 25-feet and at all vertical runs to 18 inches above finished floor elevation. For interior slab penetrations, provide continuous RTRC or PVC coated rigid galvanized steel conduit and fittings with urethane interior coating from change in direction to 18 inches above finished floor elevation, except where stubbed-up under and inside equipment or switchgear where conduit shall be terminated at minimum two inches above concrete housekeeping pad.

d. Elbows for underground electrical service entrance, feeders, transformer primary / secondary, telecommunication, and low voltage conduits shall be RTRC or PVC coated rigid galvanized steel with long radius as follows:
   1) Up to 1-inch conduit, minimum 12-inch radius.
   2) 1.5-inch conduit, minimum 18-inch radius.
   3) 2-inch conduit, minimum 24-inch radius.
   4) 2.5-inch conduit, minimum 30-inch radius.
   5) 3-inch conduit, minimum 36-inch radius.
   6) 3.5 to 6-inch conduit, minimum 48-inch radius.

e. Conduit for all floor boxes shall be routed below building slab from floor box to nearest column, wall, or as indicated.

f. Conduits shall not be routed horizontally in building slab, grade beams or pavement.

2. Encase all underground conduits in concrete.
   a. Concrete shall be tinted red throughout with a ratio of 10 pounds of dye per yard of concrete unless prohibited by utility for utility conduits. Concrete encasement for utility installed conductors shall be as specified by the utility and comply with their standards and specifications. Where utility does not require but allows concrete encasement of conduits, provide concrete encasement as specified herein.
   b. Provide minimum 3-inch concrete encasement around conduits.
   c. Provide conduit spacers for parallel branch/feeder conduits.
   d. When prior written approval from Owner and Architect to omit concrete encasement of conduits below building slab is given, conduits either specified or approved in writing to be routed under building slab without concrete encasement for electrical branch circuits or voice / data / video / communications horizontal drops or outlets shall be installed 18 inches below finished floor and on select fill. All other conduits, including but not limited to electrical feeders, voice / data / video / communications vertical, riser, tie, trunk, or service cable conduits shall be installed 48-inches below finished floor and on select fill.
   e. Use suitable manufactured separators and chairs installed 4 feet on centers. Securely anchor conduit at each chair to prevent movement during backfill placement.

3. Install building voice / data / video / communications main service conduits and electrical service transformer primary and secondary conduits with top of

concrete encasement minimum 48-inches below finished grade or pavement. Voice / data / video / communications conduits and electrical service primary conduits for utility owned electrical service transformers shall also comply with the respective utility company requirements and standards. All other underground conduits outside of building other than voice / data / video / communications main service conduits and electrical service transformer primary and secondary conduits shall have top of concrete encasement at 36 inches minimum below finished grade or pavement.

4. Provide two “caution” plastic tapes at 6-inches and 18-inches below finished slab, grade, or pavement; identify as specified in Section 26 05 00.
5. Conduits located outside building, provide magnetic locator tape at top of first compacted layer of backfill or concrete.
6. During construction, partially completed underground conduits shall be protected from the entrance of debris such as mud, sand, and dirt by means of conduit plugs. As each section of the underground conduit is completed, a testing mandrel with diameter ¼-inch smaller than the conduit, shall be drawn through each conduit. A brush with stiff bristles shall be drawn through until conduit is clear of particles of earth, sand, or gravel. Conduit plugs shall then be installed.
7. Utility underground conduit for Utility Company cable shall be installed per Utility Company standards, and their specifications for this project.
8. Concrete shall be Portland Cement conforming to ASTM-C-150, Type 1, Type III or Type V if specified. Cement content shall be sufficient to product minimum strength of 2,500 PSI.
9. Contractor shall stake out routing and location of underground conduits using actual field measurements. He shall obtain approval of the Owner and Architect before beginning trenching, horizontal drilling, and excavation.
10. Verify location and routing of all new and existing underground utilities with the Owner and Architect on the job site. Stake out these existing utilities so that they will not be damaged. Stake out new utilities to provide coordination with other trades and with new and existing utilities, easements, property lines, restricted land use areas, and right-of-ways. Verify existing public utilities with Call811.

D. Conduit shown in concrete walls, floor or roof slab:
   1. PVC Coated Galvanized Rigid steel.

E. Conduits that penetrate concrete slab, or within 100 feet of cooling towers, or at designated corrosive locations.
   1. RTRC
   2. PVC coated galvanized rigid steel

F. Connections to equipment mounted on roof, rotating equipment, transformers, and kitchen or food processing equipment, or where flexible conduit is required outdoors.
   1. Liquid tight flexible metal conduit (1/2 inch may be used for roof top supply / exhaust fans only)
   2. Liquid tight flexible metal conduit for 24-inch maximum length
   3. Conduit for roof-mounted equipment shall be routed inside the roof curb assembly roof opening. Provide permanent lock-off device at panelboard circuit breakers serving roof equipment and accessories to enable tag-out procedures for all power routed through roof curb and to the roof mounted equipment and accessories.

G. Light fixture whips:
   1. Accessible ceilings and open structure: ½-inch flexible steel conduit or steel MC cable, length not to exceed 6-feet.
   2. Non-accessible ceilings: ½-inch flexible steel conduit. Length as required to make a tap at an accessible j-box. Recessed light fixtures in non-accessible

ceilings may be daisy chained using the light fixture's integral, UL listed j-box or internal wire way that is accessible through fixture from below the ceiling.
3. Dedicated insulated ground wire.
4. Light fixture whips shall not rest on ceiling grid or tile.
5. Light fixture whips shall not be supported from the ceiling suspension system. Support from the structure with #13 AWG galvanized iron wire pendants and Caddy clips. Do not support conduit from structural bridging. Flexible conduit and steel MC cable shall be kept a minimum of 2 inches clear of roof deck.

H. Conduits at Natatorium or therapeutic pool areas:
1. Underground conduit shall be as specified in this section.
2. Exterior conduits and boxes within 100 feet of exhaust openings shall be x-wall RTRC or PVC coated galvanized rigid steel or stainless steel.
3. Exposed conduits in chemical storage rooms, pool mechanical equipment (pump rooms, and pool equipment storage rooms shall be Schedule 80 PVC. Boxes shall be PVC, or 304 Stainless Steel.
4. Exposed conduits and boxes in indoor pool areas and all other indoor public areas shall be Type 304 Stainless Steel.

I. Conduits located inside greenhouses and natatorium pump and water treatment rooms:
1. X-wall RTRC
2. Schedule 80 PVC
3. PVC coated galvanized rigid steel conduit and fittings.

J. Conduits in classified hazardous (Classified) locations:
1. Conduit fittings and seals UL listed for the classification

K. Conduits embedded in parking structure traffic wearing surface and concrete support structures:
1. Schedule 40 PVC, RTRC, PVC coated rigid galvanized conduit.
2. Schedule 40 ENT may only be used for flat runs embedded in traffic wearing surface concrete topping.
2. Solvent welded fittings only for PVC conduit and ENT.
3. Verify with Structural Engineer prior to construction for any additional limitations for raceway installation restrictions installed in parking structure including but not limited to maximum outside diameter of raceways permitted to be used in the wearing surface, and field cutting or drilling through parking structure structural members or support structures.
4. All raceways shall be securely fastened to prevent floating during concrete installation. ENT raceways shall be completely embedded in concrete material to maintain fire and smoke integratory as required by the NEC.
5. When using ENT or PVC conduits, provide transition to x-wall RTRC or PVC coated rigid galvanized conduit elbows and vertical risers to ensure that only flat horizontal runs of PVC conduit or ENT are used along the top of the parking structure structural support deck and that they are completely concealed and embedded by the wearing surface concrete material topping.

3.3 CONDUIT PENETRATIONS, SLEEVES AND ESCUTCHEONS

A. Furnish sleeves for placing in construction for all conduit passing through concrete or masonry walls, partitions, beams, all floors other than grade level, and roofs. A conduit sleeve shall be one size larger than the size of conduit, which it serves except where larger sizes are required for manufactured water, fire, or smoke stop fittings.
1. Sleeves set in concrete floor construction shall be minimum Schedule 40 galvanized steel.
2. Sleeves shall extend 3-inches above the finished floor.

B. Sleeves in concrete or masonry walls shall be RTRC or Schedule 40 galvanized steel. Sleeves shall be set flush with finished wall.

C. Install manufactured UL listed water, fire, and smoke stop fittings, or caulk around conduit or cables in sleeves with sufficient UL listed fire safe insulation or foam to maintain wall or floor slab fire or smoke rating. Refer to Architecture drawings for locations of rated walls.

D. Provide Linkseal Mechanical Seals around conduit penetrations through walls below grade. Provide a pull box to install a water stop inside wall penetration. Internally seal low voltage cabling conduit penetrations with waterproof caulking.

E. Sleeves penetrating walls below grade shall be Schedule 40 black steel pipe with ¼-inch thick steel plate secured to the pipe with continuous fillet weld. The plate shall be located in the middle of the wall and shall be 2-inches wider all around than the sleeve that it encircles. The sleeve should extend a minimum of 24-inches on either side of the penetration. The entire assembly shall be hot-dipped galvanized after fabrication. Do not sleeve or penetrate grade beams.

F. Conduit passing through the housing on connected equipment shall pass through a cleanly cut hole protected with a threaded steel bushing. Route conduit through roof openings, for piping and ductwork or through suitable roof jack, with pitch pocket. Coordinate location with roofing installation as required.

G. Conduit passing through fire rated wall shall be sealed with Fire Stop. Route conduit to preserve fire resistance rating of partitions and other elements, using materials and methods under the provisions of Division 7.

3.4 POWER DISTRIBUTION UNDERGROUND FEEDER CONDUIT AND UNDERGROUND SERVICE ENTRANCE CONDUIT

A. Power underground feeder and service entrance shall be of individual conduit encased in concrete. Unless shown otherwise, the type of conduit used shall not be mixed in any one underground conduit and shall be the size indicated on the drawings. The concrete encasement surrounding the underground conduit shall be rectangular in cross-section, having a minimum concrete thickness of 3-inches, except that conduit for 120V and above shall be separated from control and signal conduits by a minimum concrete thickness of 3-inches. Encasement concrete shall be tinted in red.

B. During construction, partially completed underground conduits shall be protected from the entrance of debris such as mud, sand, and dirt by means of conduit plugs. As each section of the underground conduit is completed, a testing mandrel shall be drawn through until each conduit is clear of particles of earth, sand, or gravel. Conduit plugs shall then be installed.

C. Furnish the exact dimensions and location of power underground conduit to be encased in time to prevent delay in the concrete work.

D. Conduit for service entrance underground conduits shall be as indicated on the drawings.

E. Primary power underground conduit shall be installed in accordance with utility company standards and the utility company specifications for this project.

3.5 TELECOMMUNICATIONS, LOW VOLTAGE AND EMPTY CONDUIT SYSTEM RACEWAYS

A. Conduit shall be installed in accordance with the specified requirements for conduit and

with the additional requirements that no length of run shall exceed 100-feet for 1 inch or smaller trade sizes and shall not contain more than two 90-degree bends or the equivalent. Pull or junction boxes shall be installed to comply with these requirements. Provide plastic bushings at all conduit terminations. Provide a grounding bushing on each data and voice conduit.

B. Conduits shall be installed from outlet box to above an accessible ceiling. All cables routed through open spaces (no-ceiling below roof deck or above floor deck) shall be routed in conduit. Telecommunications systems, CATV, CCTV, fire alarm and BMCS cables can be installed above accessible ceilings without conduit. Cables installed above accessible ceiling shall be plenum rated. Conduit rough in of these cables shall include a 90-degree turn-out to an accessible location with insulated bushings on the end of the conduit.
   1. Provide conduit from each telecommunications outlet box to accessible ceiling plenum.
   2. Provide conduit from each security / surveillance device outlet box to accessible ceiling plenum.
   3. Provide two conduits for each multi-media outlet box and each outlet box indicated to contain more than four data, audio, or video drops to accessible ceiling plenum.
   4. Provide the following minimum conduits for telecommunications and multi-media wall, floor, and ceiling mounted outlet boxes. Use the largest diameter conduit indicated below unless instructed otherwise in writing from the Architect:
      a. Non-masonry outlet box: Two 1-inch conduits.
      b. Masonry outlet box: Two 1-inch conduits, or three 3/4-inch conduits.
      c. Where indicated differently on plans or where conflicts arise, notify the Architect / Engineer prior to installation.

C. All conduit in which cable is to be installed by others shall have pull string installed. The nylon pull string shall have not less than 200 lb. tensile strength. Not less than 12-inches of slack shall be left at each end. Provide blank cover plate before substantial completion if box is for a future installation after substantial completion of the project. Conduit shall extend to a minimum six inches above nearest accessible ceiling and be turned horizontally with plastic bushing at terminations.

D. Conduits for Building Entrance Facilities:
   1. Underground Outside Plant: Install a pull box every 300-feet or after 180 degree turns.
   2. Inside Plant: Install a pull box every 150-feet or after 180 degree turns. All turns shall be large sweeps, not sharp 90s, with the radius of the sweep at least 10X the diameter of the conduit. Hence, a 4-inch conduit requires a 40-inch minimum radial sweep. If field conditions absolutely mandate a sharp 90-degree bend to be installed, then a pull box shall be installed at that location regardless of distance.
   3. Building entrance facilities shall not terminate in an IDF or any other space except the MDF.
   4. Coordinate the termination location of the building entrance facilities in the MDF with the room layout and equipment configuration.
   5. Provide 4-inch conduit unless indicated otherwise. Provide (3) fabric innerducts in each 4-inch conduit.

3.6 EXTERIOR IN-GRADE PULL BOXES

A. Provide pull boxes where specified and as required.

B. Pull boxes located in pavement shall be set with proper extensions so that top of cover is

flush with pavement.

C. Pull boxes located in non-paved areas shall be set two-inches above surrounding finished grade. Provide 12-inch wide by 8-inch deep reinforced concrete crown around neck or opening and sloped down away from pull box opening.

3.7 ALUMINUM ALLOY CONDUCTORS

A. Where aluminum alloy conductors are specified, approved and substituted for copper conductors, provide the required conduit size based on conduit fill using NEC or recognized cable manufacturer's conduit fill tables for aluminum alloy compact conductors.

3.8 IDENTIFICATION

A. Conduit Systems: Provide adequate marking of conduit larger than one inch exposed or concealed in interior accessible spaces to distinguish each run as either a power (120/208V or 277/480V) or signal / telecommunication conduit (Fire Alarm, BAS, BMCS, Security, CCTV, Access Control, Intrusion Detection, Telecom, etc.). Except as otherwise indicated, use orange banding with black lettering. Provide self-adhesive or snap-on type plastic markers. Locate markers at ends of conduit runs, near switches and other control devices, near items of equipment served by the conductors, at points where conduit passes through walls or floors or enters non-accessible construction, and at spacing of not more than 50-feet along each run of exposed conduit. Switch-leg conduit and short branches for power connections need not be marked, except where conduit is larger than 1-inch.

END OF SECTION

SECTION 26 05 35

ELECTRICAL CONNECTIONS FOR EQUIPMENT

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Electrical connections as required and scheduled, and as specified.

1.2 RELATED WORK

A. Refer to other Divisions for specific individual equipment electrical requirements.

1.3 QUALITY ASSURANCE

A. UL Label: Products shall be UL listed to the extent possible.

PART 2 - PRODUCTS

2.1 MATERIALS AND COMPONENTS

A. General: For each electrical connection indicated, provide a complete assembly including, but not limited to, pressure connectors, terminals (lugs), electrical insulating tape, heat-shrinkable insulating tubing, cable ties, solderless wire nuts, and other items and accessories needed to complete splices and terminations.

B. Raceways: Refer to related sections.

C. Conductors and Connectors: Refer to related section. Conductors at equipment terminations shall be copper.

D. Terminals: Provide electrical terminals as indicated by the terminal manufacturer for the application.

PART 3 - EXECUTION

3.1 INSTALLATION OF ELECTRICAL CONNECTIONS

A. General: Install electrical connections as shown, in accordance with applicable portions of the NECA Standard of Installation, and industry practices.

B. Conductors: Connect electrical power supply conductors to equipment conductors in accordance with equipment manufacturer's written instructions and wiring diagrams. Where possible, match conductors of the electrical connection for interface between the electrical supply and the installed equipment.

C. Splice Insulation: Cover splices with electrical insulation equivalent to, or of a higher rating than, insulation on the conductors being spliced.

D. Appearance: Prepare conductors by cutting and stripping covering, jacket, and insulation to ensure a uniform and neat appearance where cables and wires are terminated.

E. Routing: Trim cables and wires to be as short as practical. Arrange routing to facilitate inspection, testing, and maintenance.

F. Motor Connections: Where possible, terminate conduit in conduit boxes at motors. Where motors are not provided with conduit boxes, terminate the conduit in a suitable condulet, and make motor connections. Conduit passing through the housing on connected equipment shall pass through a cleanly cut hole protected with an approved grommet. For all AHU or fan motors and all other motors 10 HP and larger, at the motor connection do not use wire nuts. Provide copper alloy split bolt connectors or compression lugs and bolts. Insulate connection with Scotch Super 88 vinyl electrical tape over rubber tape, or Tyco Gelcap Motor Connection Kit.

G. Conduit connections to equipment including, but not limited to, Variable Frequency Drives, Manual and Automatic Transfer Switches, Surge Suppression Devices, motor controllers, electrical disconnects, food service / processing equipment, electronics, control panels and Owner furnished equipment:
   1. Make conduit penetrations only at the bottom flat surface of the equipment and only where permitted by the equipment manufacturer to avoid un-intentional water entry. Coordinate installation of electrical connections for equipment with equipment installation work. Where equipment manufacture does not permit a bottom conduit entry, verify with Owner/Engineer and locate the conduit entry at the side surface as close as possible to the bottom of the enclosure.
   2. Where conduit originates from an elevation above the conduit entry, provide a “T” condulet below the enclosure’s bottom elevation. Provide conduit from the condulet up to the enclosure bottom horizontal surface for electrical connection.

H. Identification: Refer to Electrical General Provisions for identification of electrical power supply conductor terminations with markers approved as to type, color, letter and marker size by the Architect. Fasten markers at each termination point, as close as possible to each connecting point.

I. Equipment and Furnishings: Refer to other Divisions. Coordinate power and control provisions shown for equipment and furnishings with the provisions required for the furnished equipment and furnishings. Where the power and control requirements are less than or equal to those specified, modifications to power and control provisions shall be made at no cost as a part of coordination. Where power and control requirements are in excess of those shown, notify the Architect in writing of the requirements.

END OF SECTION

SECTION 26 05 37

ELECTRICAL BOXES AND FITTINGS

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Provide electrical box and fitting work as required, scheduled, indicated, and specified.

1.2 QUALITY ASSURANCE

A. UL Label: Electrical boxes and fittings shall be UL listed.

PART 2 - PRODUCTS

2.1 FABRICATED MATERIALS

A. Interior Outlet Boxes: Provide galvanized steel interior outlet wiring boxes, of the type, shape, and size, including depth of box, to suit respective locations and installation. Construct with stamped knockouts in back and sides. Provide gang boxes where devices are shown grouped. Single box design; sectional boxes are not acceptable, except for wall mounted electronic displays.
   1. Type of Various Locations:
      a. Wall mounted interactive media boards, video displays, televisions, electronic signage and similar installations; recessed wall mounted box for power and/or multi-media (low voltage) outlets: Arlington Industries #TVBS 613, 4-gang steel box with white trim plate.
      b. Technology, data, voice, video and multi-media outlet boxes at locations other than wall mounted interactive media boards, video displays, televisions, electronic signage and similar installations: minimum 4-inch square (2-gang), 3-inch deep interior outlet boxes. Raco #260H large capacity box with ½ through 2-inch knockouts.
      c. Security, access control, and video surveillance outlet boxes: single gang, 3-inch deep outlet boxes mounted long axis vertically.
      d. All other applications: minimum 4-inch square (2-gang) 2-1/8-inch deep boxes.
      e. Masonry Walls: Galvanized switch boxes made especially for masonry installations; depths of boxes must be coordinated for each installation.
      f. Surface: Type FS or FD box with surface cover.
      g. Corrosive locations or natatorium areas: 316 stainless steel construction suitable for the installation.
      h. Hazardous (Classified) Locations: Explosion proof boxes, seals and fittings.
      i. Special: Where above types are not suitable, boxes as required, taking into account space available, appearance, and Code requirements
   2. Interior Outlet Box Accessories: Outlet box accessories required as for installation, including covers or wall device plates, mounting brackets, wallboard hangers, extension rings, plaster rings for boxes in plaster construction, fixture studs, cable clamps and metal straps for supporting outlet boxes. Accessories shall be compatible with outlet boxes used and meet requirements of individual wiring.

B. Damp Location Outlet and Damp or Wet Location Switch Boxes: Deep type, hot dipped galvanized cast-metal weatherproof outlet wiring boxes, of type, shape, and size required. Include depth of box, threaded conduit ends, and stainless steel cover plate

with spring-hinged waterproof caps suitable for application. Include faceplate gasket and corrosion-resistant, tamper / vandal proof fasteners.

C. Wet Location Outlet Boxes: Hot dipped galvanized cast-iron weatherproof outlet wiring boxes, of type, shape, and size required. Include depth of box, threaded conduit ends.

D. Junction and Pull Boxes: Galvanized sheet steel junction and pull boxes, with screw-on covers, of type, shape, and size, to suit respective location and installation.
   1. Type for Various Locations:
      a. Minimum Size: 4-inch square, 2-1/8-inches deep.
      b. 150 Cubic Inches in Volume or Larger: Code gauge steel with sides formed and welded, screw covers unless shown or required to have hinged doors. All boxes mounted above ceiling shall have screw covers. Boxes in all other areas with covers larger than 12-inches shall have hinged with screw covers. Knockouts factory stamped or formed in field with a cutting tool to provide a clean symmetrically cut hole.
      c. Exterior or Wet Areas: 304 stainless steel NEMA 4X construction with gaskets and corrosion-resistant fasteners

E. Conduit Bodies: Provide galvanized cast-metal conduit bodies, of type, shape, and size, to suit location and installation. Construct with threaded conduit ends, removable cover, and corrosion-resistant screws.

F. Bushings, Knockout Closures, and Locknuts: Provide corrosion-resistant punched-steel box knockout closures, conduit locknuts, and insulated conduit bushings of type and size to suit use and installation.

G. Outlet boxes in fire rated walls: Provide 2-hour rated gasket within box and below cover, equal to Rectorseal Metacaulk box guard and cover guard.

PART 3 - EXECUTION

3.1 INSTALLATION OF BOXES AND FITTINGS

A. Install electrical boxes and fittings as shown and as required, in compliance with NEC requirements, in accordance with the manufacturer's written instructions, in accordance with industry practices.

B. Provide recessed device boxes for wall mounted interactive media boards, video displays, televisions, electronic signage and similar installations.

C. Provide minimum 4-inch square (2-gang), 3-inch deep interior outlet boxes for technology, data, voice, video, and multi-media outlet boxes at locations other than wall mounted interactive boards, video or visual displays. Provide single gang only, 3-inch deep outlet boxes mounted long axis vertically for security, access control, and video surveillance, coordinate with security equipment installation. Provide minimum 4-inch square (2-gang) 2-1/8-inch deep boxes for all other applications. Where indicated differently on plans or where conflicts arise, notify the Architect / Engineer prior to installation. Box extenders or plaster rings shall not be used to increase size. Provide increased box size as required.

D. Junction and pull boxes, condulets, gutters, located above grid ceilings shall be mounted within 18-inches of ceiling grid. Junction and pull boxes above grid ceilings shall be mounted in the same room served. Junction boxes and pull boxes required for areas with inaccessible ceilings shall be located above the nearest accessible ceiling area. All junction box or pull box openings shall be side or bottom accessible. Removal of light

fixtures, mechanical equipment or other devices shall not be required to access boxes. Outlet boxes above ceiling for low voltage terminations shall face towards the floor.

E. Use outlet and switch boxes for junctions on concealed conduit systems except in utility areas where exposed junction or pull boxes can be used.

F. Determine from the drawings and by measurement the location of each outlet. Locate electrical boxes to accommodate millwork, fixtures, marker boards, and other room equipment at no additional cost to the Owner. The outlet locations shall be modified from those shown to accommodate changes in door swing or to clear interferences that arise from construction as well as modifying them to center in rooms. The modifications shall be made with no cost as part of coordination. Check the conditions throughout the job and notify the Architect of discrepancies. Verify modifications before proceeding with installation. Set wall boxes in advance of wall construction, blocked in place and secured. Set all wall boxes flush with the finish and install extension rings as required extending boxes to the finished surfaces of special furring or wall finishes. Provide wall box support legs attached to stud to prevent movement of box in wall.

G. Unless noted or directed otherwise at installation, place outlet boxes as indicated on architectural elevations and as required by local codes.

H. Outlets above counters, mount long axis horizontally. Refer to architectural elevations and coordinate to clear backsplash and millwork.

I. Provide pull boxes, junction boxes, wiring troughs, and cabinets where necessary for installation of electrical systems. Surface mounted boxes below 9 feet and accessible to the public shall not have stamped knockouts.

J. Provide weatherproof boxes for interior and exterior locations exposed to weather or moisture.

K. Provide knockout closures to cap unused knockout holes in boxes.

L. Locate boxes and conduit bodies to ensure access to electrical wiring. Provide minimum 12-inch clearance in front of box or conduit body access.

M. Secure boxes to the substrate where they are mounted, or embed boxes in concrete or masonry.

N. Boxes for any conduit system shall not be secured to the ceiling system, HVAC ductwork or piping system.

O. Provide junction and pull boxes for feeders and branch circuits where shown and where required by NEC, regardless of whether or not boxes are shown.

P. Coordinate locations of boxes in fire rated partitions and slabs to not affect the fire rating of the partition or slab. Notify the Architect in writing where modification or construction is required to maintain the partition or slab fire rating.

Q. Exterior boxes installed within 50-feet of cooling towers or water treatment areas shall be of 304 stainless steel, weatherproof NEMA 4X construction.

R. Identification: Paint the exterior and cover plates of building interior junction boxes and pull boxes located above accessible ceilings or non-finished areas to correspond to the following colors:

1. Orange: - 480/277 VAC systems

2. Light Blue: - 240 VAC three phase delta systems.
3. Red – All Emergency circuits, regardless of voltage, and fire alarm system.
4. Light Green - 120/208 VAC 3 phase and 120/240 VAC single-phase systems
5. Yellow – Building Management and Control System - BMCS
6. White - Security and Surveillance equipment circuits

S. All box covers shall be labeled with Panel ID and circuit numbers of all circuits available in box using permanent black marker. Boxes containing main feeders are to list where fed from and load (example “MSB to Panel HA”). Information listed is to be legible, markovers are not acceptable. Multi-sectional panel numbers are not to be listed on covers (example “LA2” referring to Panel LA sec. 2 is to be listed as “LA”). Label covers for special applications explaining contents (example “Emerg. Gen. Annunciator controls”, “IDF ground”). Do not attach box covers that have both sides painted or labeled differently. In public areas where boxes are painted same color as room per architect, label inside covers. Boxes that are not used shall be labeled as not used and include panel ID. Example “Not Used Panel LA”. Unused raceways not in sight of panel shall be terminated in a box and labeled not used and include panel identification.

T. Align adjacent wall mounted outlet boxes for switches, thermostats, and similar devices.

U. Use flush mounting outlet box in finished areas unless specifically indicated as being used with exposed conduit.

V. Locate flush-mounting box in masonry wall to require cutting of masonry unit corner only. Coordinate masonry cutting to achieve neat opening.

W. Do not install flush mounting box back-to-back in walls; provide minimum 6 inches with stud separation. Provide minimum 24 inches with separation in acoustic rated walls.

X. Secure flush mounting box to interior wall and partition studs. Accurately position to allow for surface finish thickness. Provide UL listed materials to support boxes in walls to prevent movement. Ensure box cannot be pushed inside wall.

Y. Use stamped steel bridges to fasten flush mounting outlet box between studs.

Z. Install flush mounting box without damaging vapor barriers, wall insulation or reducing its effectiveness.

AA. Use adjustable steel channel fasteners for hung ceiling outlet box.

BB. Do not fasten boxes to ceiling support wires.

CC. Support systems are to hang vertically straight down. All-thread supports, when used, are not to be installed at an angle or bent.

DD. Use gang box where more than one device is mounted together. Do not use sectional box.

EE. Use gang box with plaster ring for single device outlets.

FF. Support outlets flush with suspended ceilings to the building structure.

GG. Mount boxes to the building structure with supporting facilities independent of the conduits or raceways.

HH. Where multiple feeders are in one pull box, conductors shall be wrapped with 3M No. 7700 Arc and fireproof tape.

II. Provide plaster rings of suitable depth on all outlet boxes. Face of plaster ring shall be within 1/8 inch from finished surface.

JJ. Equip boxes supporting fixtures designed to accept fixture studs with 3/8-inch stud (galvanized malleable iron) inserted through back of box and secured by locknut. Boxes not equipped with outlets shall have level metal covers with rust-resisting screws.

KK. Do not mount junction boxes above inaccessible ceilings or in inaccessible spaces. Do not mount junction boxes above ceilings accessible only by removing light fixture, mechanical equipment or other devices. At inaccessible spaces use junction box furnished with light fixture or light fixture wiring compartment UL listed for through wiring.

LL. No more than 12 conduits containing branch circuits may be installed in any junction or pull box.

MM. All junction boxes shall be protected from building finish painters' over spray and from fire proofing overspray. Remove protective coverings when painting and fire proofing are complete.

NN. Bond equipment grounding conductor to all junction and pull boxes.

OO. Do not mount boxes or conduit bodies on walls directly above electrical panels or switchgear located next to walls.

PP. Do not mount boxes or conduit bodies within 18 inches of outside edges of roof access openings.

QQ. Box extenders or plaster rings shall not be used to increase the Code mandated cable capacity of a box. Provide proper size box.

3.2 ADJUSTING

A. Adjust flush-mounting outlets to make front flush with finished wall material.

B. Install knockout closures in unused box openings.

END OF SECTION

SECTION 26 05 40

ELECTRICAL GUTTERS AND WIREWAYS

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Provide electrical gutter work as shown, as specified and as required.

B. Application: The types of electrical gutters required for the project include the following:
1. Electrical wiring gutters
2. Voice / Data / Video / Communication and signal distribution wireway

1.2 QUALITY ASSURANCE

A. UL Label: Gutters and wireways shall be UL labeled.

PART 2 - PRODUCTS

2.1 ELECTRICAL GUTTERS AND WIREWAYS

A. General: Provide hinged electrical gutters and wireways in the types and sizes indicated or required, minimum 16 gauge thickness, with rounded edges and smooth surfaces; constructed in compliance with applicable standards; with features required.

B. Size: Provide size indicated. Where size is not indicated, construct in accordance with the NEC and other standards. Gutters shall be of manufacturer’s standard lengths, without field cutting or field extensions.

C. Accessories: Provide gutter and wireway accessories where indicated, constructed of same metal and finish as gutters or wireways.

D. Supports: Provide gutter and wireway supports indicated, conforming to NEC, and as recommended by the manufacturer, and as specified in Section 26 05 33 Conduit Systems.

E. Materials and Finishes: NEMA 1 gutters and wireways shall have gray powder coat finish over galvanized steel. Gutters and wireways installed outside shall be NEMA 3RX minimum. Gutters or wireways installed within 100-feet of cooling towers, at kitchen or food preparation areas, and natatorium, spa or therapy pool areas shall be of 304 stainless steel NEMA 4X construction.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Provide gutters and wireways only where specified or required. Use of gutters and wireways shall be kept to a minimum.

B. Finishing: Remove burrs and sharp edges of gutters and wireways wherever they could be injurious to conductor insulation or jacket.

C. Installation: Install gutters and wireways where shown or required, in accordance with the manufacturer's written instructions, NEC, NECA "Standard of Installation," and with recognized industry practices to ensure that the gutters and wireways comply with the

specified requirements. Comply with requirements of NEMA and the NEC pertaining to installation of electrical gutters.

D. Grounding: Electrically ground gutters and wireways to ensure continuous electrical conductivity. Provide equipment grounding conductor.

E. Conductors:
   1. Complete gutter and wireway installation before starting the installation of conductors.
   2. Provide sufficient space to permit access for installing, splicing, and maintaining the conductors.

F. A maximum of 12 conduits containing branch circuits shall be allowed to be installed in any gutter or wireway.

END OF SECTION

SECTION 26 05 50

FIRESTOPS

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Provide firestop as required, and as specified. Refer to Architectural drawings for all fire and smoke rated partitions, walls, floors, etc.

B. Types: Firestop required for the project includes smokestop.

1.2 QUALITY ASSURANCE

A. UL Label: Firestops shall be UL labeled.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Nelson

B. 3M (Minnesota Mining Manufacturing)

C. Hilti

D. Specified Technologies, Inc.

E. Metacaulk

2.2 MATERIAL AND COMPONENTS

A. General: Except as otherwise indicated, provide firestop manufacturer's standard materials and components as indicated by published product information, designed and constructed as recommended by the manufacturer, and as required for installation.

2.3 FIRESTOP

A. Conduits: Provide a soft, permanently flexible sealant for 1-1/2 to 2 hour rated fireproofing for steel conduits (up to 4" diameter).

B. Low Voltage Cables, Fiber Optic Cable and Innerduct: Provide Specified Technologies, Inc. EZ-Path single, double, or triple pathways as required.

PART 3 - EXECUTION

3.1 INSTALLATION OF FIRESTOPS

A. General: Install firestops in accordance with the manufacturer's installation instructions and industry practices to ensure that the firestops comply with requirements. Comply with UL and NFPA standards for the installation of firestops.

END OF SECTION

SECTION 26 12 16

THREE PHASE, ENERGY EFFICIENT DRY-TYPE HARMONIC MITIGATING TRANSFORMERS (HMT) – 15kVA and Above

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Work Included: Low voltage (less than 600 Volt) ultra-efficient harmonic mitigating transformer work as shown, scheduled, indicated, and specified.

1.2 QUALITY ASSURANCE

A. Standards: Transformers shall be designed and tested in accordance with NEMA and ANSI C33.4 and C89.2 standards.

B. UL Label: Transformers shall be UL labeled.

1.3 REFERENCE STANDARDS

A. UL-506

B. ANSI C75.11

C. NEMA ST-20

D. DOE 10 CFR Part 431, aka DOE 2016

1.4 WARRANTY

A. Minimum 10-year pro-rated parts replacement warranty.

1.4 SUBMITTALS

A. Include warranty information standard, outline and support point dimensions of enclosures and accessories, unit weight, voltage, kVA, impedance ratings and characteristics, no load core loss, full load winding conductor loss, full load losses, efficiency at 0, 25, 35, 50, 75 and 100 percent rated loads based on IEEE Standard 519-1992 Table 43 for non-linear load profile, percent regulation with 80 percent and 100 percent power factor loads, sound level at full load, tap configurations, insulation system type and rated temperature rise.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Powersmiths – T1000-OPAL Series

B. Power Quality International – DV-Z4 Series

C. Mirus International – ULL-XX-H1E Series

2.2 MATERIALS AND COMPONENTS

A. Except as otherwise indicated, provide transformer manufacturer's standard materials

and components as indicated by published product information, designed and constructed as recommended, and as required for a complete installation.

2.3 ENERGY EFFICIENT DRY-TYPE HARMONIC MITIGATING TRANSFORMERS

A. General: Indoor transformers shall be ultra-efficient with an average of 30% less losses than comparable DOE 2016 transformer efficiencies. Transformers shall be dry-type, NEMA Type 2 (ventilated-drip proof) enclosure, multiple-winding, rated as shown, and shall have manufacturer's standard impedance.

B. Construction: Transformer core shall be constructed of cold-rolled, oriented, high permeability silicon steel, either formed as a coil or laminated. Windings shall be copper, individual winding terminated with tin-plated copper bars, or wire electrically welded to the end of the windings, 10 kV BIL.

C. Windings: Transformer secondary windings shall be zigzag (0-degree or 30-degree phase shift or as indicated). The secondary windings shall provide for magnetic flux cancellation of the zero sequence (triplen) harmonic currents from non-linear loads connected to the transformer secondary. Triplen harmonic currents shall not appear on the current waveform of the transformer primary winding.

D. K-Rating: K-13 based on IEEE C57.110.

E. Taps: Transformers shall have six 2-1/2% taps, two above and four below nominal.

F. Temperature Rating: Transformers shall use an insulation system that has been temperature classified and approved by UL. Transformers shall have a maximum winding temperature rise of 115°C with an insulation system temperature classification of 220°C.

G. Accessories: Transformers shall have ground bus, 200% neutral bus, and full-length copper electrostatic winding shield, compression type lug terminations.

H. Load Rating:
1. Transformers shall be capable of operating at 120% of nameplate rating continuously while in an ambient temperature not exceeding 40°C.
2. Transformers shall be capable of meeting the daily overload requirement of ANSI C57.12.
3. Closed delta 120/240-Volt secondary, 3-phase, 4-wire with center tap neutral winding transformers:
    a. KVA rating indicated shall be for balanced 3-phase loading. Center tap winding shall allow for a maximum nominal 70-percent of three-phase kVA rating for unbalanced single phase neutral connected 120/240-Volt loads. The center tap winding shall be individually rated or constructed at twice the capacity of each of the other delta connected windings. (Example: a 225kVA rated center tap transformer would consist of two 75-kVA windings and one 150-kVA center tap winding).

I. Sound Rating: The transformer shall have sound levels lower than those ratings established in NEMA ST-20 and as shown in the following table. Sound ratings shall be measured in accordance with ANSI C89.91.

Transformer Rating (kVA) (600 Volt Class)	Maximum Sound Level Decibels
15 to 45	42
63 to 150	47
175 to 300	52

400 to 500	57
600 to 1000	61

J. Efficiency: Manufacturer's transformers shall exceed DOE 2016 efficiencies for standard dry-type transformers on average by a minimum 24% at 35% load of name plate load rating.

K. Impedance, minimum: 15-30 kVA 3.0%, 45 kVA and larger 3.5%.

L. Testing:
1. The manufacturer shall have tested each transformer for proper operation before shipment.
2. The manufacturer shall have performed the following additional tests on units identical to the design type being supplied. Furnish proof of performance of these tests in the form of test data sheets upon request:
   a. Sound levels.
   b. Temperature rise tests.
   c. Full-load core and winding losses.
   d. Percent regulation with 80 and 100% power factor load.
   e. Percent impedance.
   f. Exciting current.
   g. Insulation resistance.
   h. Non-linear load testing efficiency at 0, 25, 35, 50, 75 and 100% load under non-linear load profile based on IEEE C57.110.

PART 3 - EXECUTION

3.1 INSTALLATION OF TRANSFORMERS

A. General: Install transformers where shown, in accordance with the manufacturer's written instructions and industry practices to ensure that the transformers meet the specifications. Comply with requirements of NEMA and NEC standards, and applicable portions of NECA Standard of Installation, for installation of transformers. Transformers shall be floor mounted. Ceiling mounted transformers are not acceptable.

B. Dry-Type Transformer Mounting: Indoor, floor mount transformer on properly sized Amber/Booth Type RVD rubber-in-shear vibration isolators. Transformer enclosures shall make no contact with wall surfaces. Transformer enclosure shall be minimum 2-inches from rear wall and located to maximize working space in front of transformer.

C. Conduit: Conduit directly connected to transformer enclosures shall be flexible liquid tight conduit extending for a minimum of 18-inches and a maximum of 24 inches from transformer enclosure as measured along the conduit centerline. Include a ground wire, size in accordance with NEC, internal in each length of flexible conduit.

D. Grounding: Ground and bond transformers as a separately derived system unless noted otherwise, refer to NEC 250. Installation of bonding strap or bonding conductor between ground and neutral bus shall be witnessed by the Engineer prior to applying power and terminating secondary conductors. Ground transformer neutral to building steel or other nearest ground electrode as required by NEC 250 if building steel is not present.

3.2 TESTING

A. Insulation Tests: Before energizing, check transformer windings for continuity.

B. Winding Current: During initial no-load energizing, check current in each primary winding.

C. Tap Settings: Measure and record load current and voltage of transformers while loaded to verify proper transformer tap settings. Adjust tap settings to achieve or slightly exceed nominal secondary voltage at the transformer taps under no load. No load secondary tap voltage to ground shall not exceed 125 Volts for 120:208/240 systems and 290 Volts for 277/480 Volt systems when primary voltage is less than 5% over nominal.

D. Submittals: Furnish instruments and personnel required for tests. Submit four copies of certified test results to Engineer for review. Reports include transformer tested, date and time of tests, relative humidity, temperature, and weather conditions.

E. Notification: Notify Engineer in writing of any deviation from manufacturer's pre-shipment test data.

END OF SECTION

SECTION 26 12 17

ULTRA HIGH EFFICIENCY K-RATED TRANSFORMERS

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Copper-wound three-phase transformer exceeding US Department of Energy 2016 Efficiency Standards, with extremely low no load losses.
   1. Transformers shall be designed to an efficiency standard higher than NEMA Premium.

B. Load Mix: Transformer shall be UL 1561 Listed to feed a mix of equipment load profiles such as computers without derating or significant degradation of efficiency.

1.2 REFERENCES

A. FEDERAL REGISTER – US Department of Energy, Office of Energy Efficiency and Renewable Energy. 10 CFR Part 431. Energy Conservation Program for Commercial and Industrial Equipment: Energy Conservation Standards for Distribution Transformers; 2016 Standards

B. DOE Test Method For Measuring The Energy Consumption Of Distribution Transformers Under Appendix A To Subpart K Of 10 CFR Part 431.

C. Metering Standards:
   1. Computational algorithms per IEEE Std 1459-2000
   2. UL 916, UL 61010C-1 CAT III

D. IEEE-1100 – Recommended Practice for Powering and Grounding Sensitive Electronic Equipment
   1. IEEE Standard 1100 documents how typical transformers feeding electronic equipment produce substantially higher losses under electronic equipment load compared to under linear load, requiring derating.

E. LEED – Leadership in Energy and Environmental Design, U.S. Green Building Council.

F. ISO 9000:2000 – International Standards Organization - Quality Management System

G. ISO 14000:2004 – International Standards Organization - Environmental Management System

H. NFPA 70 - National Electrical Code (Latest Edition)

I. NEMA ST20-2014 - Dry-Type Transformers for General Applications

J. NETA ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment

K. US Department of Energy, 10 CFR Part 431, 2015. Energy Conservation Program: Energy Conservation Standards for Distribution Transformers; Final Rule.

L. IEEE C57.110-2008 – IEEE Recommended Practice for establishing transformer capability when feeding non-sinusoidal load currents.

M. ISO 17025 – International Standards Organization - General requirements for the competence of testing and calibration laboratories.

N. UL 1561 - Dry-Type General Purpose and Power Transformers.

1.3 SUBMITTALS

A. Submit product data including the following:
1. Copy of ISO 14001:2004 Certification of manufacturing operation.
2. Copy of ISO 9001:2000 Certification of manufacturing operation.
3. Construction Details including enclosure dimensions, kVA rating, primary & secondary nominal voltages, voltage taps, BIL, unit weight
4. Basic Performance characteristics including insulation class, temperature rise, core and coil materials, impedances & audible noise level, unit weight
5. Inrush Current (typical 3 cycle recovery)
6. Short Circuit Current data: Primary (Sym. O/P S/C) & Secondary (L-N/G S/C)
7. Efficiency Data
    a. No load and full load losses per NEMA ST20
    b. Linear load Efficiency data @ 1/6 load
    c. Linear load efficiency data @ 1/4, 1/2, 3/4 & full load
    d. Linear Load Efficiency @ 35% loading tested per NEMA TP-2.
    e. Efficiency under specified K rating load profile at 15%, 25%, 50%, 75%, 100% of nameplate rating.
8. Copy of Factory ISO 9001 documentation describing nonlinear load test program
    a. Meter and CT details including model, accuracy, serial numbers and calibration information.
9. Copy of Linear & Nonlinear load test report for a representative 75kVA transformer
10. 25 year Product Warranty Certificate

B. Description of manufacturer’s factory nonlinear load test program.
1. In light of the significant degradation of transformer performance when feeding nonlinear load compared to linear load, it is mandatory that the manufacturer test the transformers under nonlinear load representative of real world load mix. Transformers that have not been subject to testing under nonlinear load will not be considered for this project due to the uncertainty related to their real world performance.
2. Given the lack of a standard for testing transformers under nonlinear load, the manufacturer must have a nonlinear Load Test Program operating in the production environment that is audited and documented per quality standard ISO 9001.
3. The nonlinear load bank shall consist of a phase-neutral loading with a specified K rating load profile, representative of a mix of typical commercial equipment.
4. Meters and CTs shall both be revenue class accurate. CTs shall be operated within their approved accuracy loading range. Dual meters shall gather simultaneous primary and secondary energy and harmonic data. Meter and CT details including model, accuracy, serial numbers and calibration information.
5. Efficiency: Measurements shall be taken at multiple load levels and plotted to show compliance with specification and correlation to the designed efficiency curve.
6. Efficiency shall be determined purely by measurements using method and instrumentation per NEMA TP-2 Standard. Other methods are not acceptable.
7. Harmonic data including current and Voltage THD at the different load levels

shall be included with the test report.

1.4 SPECIFICATION COMPLIANCE REVIEW

A. Mark up a complete copy of the specification section for the product to indicate a) acknowledgement of the specification requirement (Comply), or b) acknowledgement that the particular specification requirement does not apply to this specific project (Not Applicable) or, c) acknowledgement that the specification requirement cannot be made or that a variance is being submitted for review to the Architect/Engineer/Owner (Does Not Comply, Explanation:) Do not submit an outline form of compliance, submit a complete copy with the product data.

1.5 DELIVERY, STORAGE AND HANDLING

A. Store and protect products

B. Store in a warm, dry location with uniform temperature. Cover ventilation openings to keep out dust, water and other foreign material.

C. Handle transformers using lifting eyes and/or brackets provided for that purpose. Protect against unfavorable external environment such as rain and snow, during handling.

1.6 WARRANTY

A. Transformer shall carry a 25-year pro-rated warranty, which shall be standard for the product line.

1.7 INTERNATIONAL STANDARDS ORGANIZATION REGISTRATION OF MANUFACTURING PLANT

A. Registration to current ISO standard is required.

B. Independent annual audits are conducted.

C. Product shall be manufactured in registered facility

D. ISO 9001:2000 Registered – Quality Management System

E. ISO 14001:2004 Registered – Environmental Management System
   1. Transformer manufacturing can produce significant emissions of volatile compounds and significant other waste. To minimize environmental impact, the transformer must the product of a manufacturing process that has been independently audited to comply with the ISO 14001:2004 Environmental Management System Standard, where strict quality control of raw material sourcing and construction techniques maximize product efficiency and minimize emissions and waste byproducts.
   2. ISO 14001:2004 ensures that a facility has had an independent environmental impact assessment of raw material sourcing and all manufacturing processes, and has implemented an independent annually audited program that minimizes environmental impact during manufacturing process and includes a strictly monitored continuous improvement program.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS/PRODUCT

A. Powersmiths E-Saver OPAL

B. Power Quality International (Z3 e-Rated)

C. Mirus - ULLTRA

2.2 TRANSFORMER SPECIFICATION

A. Minimum UL Listed and Labeled K-Rating: K13.

B. Copper-wound, 3-phase, common core, ventilated, dry-type, isolation transformer built to NEMA ST20 and relevant NEMA, UL and IEEE standards; 200% rated neutral; 60Hz rated; Transformers 750 kVA and less, 600 volt primary and less, shall be UL Listed and bear the label. All terminals, including those for changing taps, must be readily accessible by removing a front cover plate. Windings shall be continuous with terminations brazed or welded. 10kV BIL.

C. Insulation System:
   1. Shall be NOMEX-based with an Epoxy Co-polymer impregnate for lowest environmental impact, long term reliability and long life expectancy
      a. Class: 220 degrees C
      b. Impregnate Properties for low emissions during manufacturing, highest reliability and life expectancy
      c. Epoxy co-polymer
      d. VOC: less than 1.65 lbs./gal (low emissions during manufacturing)
      e. Water absorption (24hrs @25C): less than 0.05% (superior insulation, longer life)
      f. Chemical Resistance: Must have documented excellent performance rating by supplier
      g. Dielectric Strength: minimum of 3200 volts/mil dry (for superior stress, overvoltage tolerance)
      h. Dissipation Factor: max. 0.02 @25C to reduce aging of insulation, extending useful life

D. Operating Temperature Rise: Maximum 115 degree C in a 40 degree C maximum ambient

E. Noise levels:
   1. 3dB Below NEMA ST-20
   2. Production Test every unit. Data to be available upon request.

F. Exceed minimum efficiency requirements of US Department of Energy, 10 CFR Part 431, April 18, 2013, Energy Conservation Program: Energy Conservation Standards for Distribution Transformers: Final Rule which takes effect January 1, 2016, and comply with the table of maximum no Load Loses, efficiency requirements at 1/6 load, efficiency at 35% load per 10 CFR Part 431, and efficiency at 25% load under the transformer specified K-rating load profile.

G. Maximum losses and minimum efficiency under linear load conditions per Table 1.

Table 1
Max and Min Values for Losses and Efficiency for "High Efficiency" Transformers
Under K1 Linear and Specified K-Rating Nonlinear Loading

kVA Rating	No Load	16.5% Load				25% Load				35% Load			
		K1 Linear		Nonlinear		Linear		Nonlinear		K1 Linear		Nonlinear	
	Max Loss (kW)	Max Loss (kW)	Min Eff. (%)	Max Loss (kW)	Min Eff. (%)	Max Loss (kW)	Min Eff. (%)	Max Loss (kW)	Min Eff. (%)	Max Loss (kW)	Min Eff. (%)	Max Loss (kW)	Min Eff. (%)
15	0.054	0.066	97.38	0.067	97.36	0.082	97.86	0.085	97.78	0.109	97.97	0.117	97.82
30	0.091	0.112	97.79	0.113	97.77	0.138	98.19	0.144	98.12	0.183	98.29	0.200	98.13
45	0.124	0.152	98.00	0.154	97.97	0.187	98.36	0.197	98.28	0.248	98.45	0.276	98.28
75	0.181	0.221	98.24	0.225	98.22	0.273	98.56	0.288	98.49	0.362	98.64	0.404	98.48
112.5	0.245	0.300	98.41	0.305	98.38	0.370	98.70	0.393	98.62	0.490	98.77	0.555	98.61
150	0.303	0.370	98.53	0.377	98.50	0.457	98.80	0.486	98.72	0.605	98.86	0.688	98.71
225	0.410	0.501	98.67	0.510	98.64	0.619	98.91	0.659	98.84	0.820	98.97	0.937	98.82
300	0.509	0.622	98.76	0.636	98.73	0.769	98.99	0.829	98.91	1.018	99.04	1.194	98.88
500	0.741	0.906	98.91	0.928	98.89	1.119	99.11	1.213	99.04	1.482	99.16	1.754	99.01

H. Voltage Taps: For transformers 30kVA-300kVA, provide two 2-1/2% full capacity taps above and below nominal primary voltage. For transformers 15kVA and smaller as well as 500kVA and larger provide one 5% full capacity tap above and below nominal primary voltage.

I. Impedance: Between 3.0% and 6.0% unless otherwise noted.

J. Enclosure type: Ventilated NEMA 2; NEMA 3RX aluminum or stainless steel when located outdoors, or as indicated otherwise

K. Finish Color: Provide light gray ANSI-61 paint finish for transformers located outdoors. Provide manufacturer's standard paint finish color indoors.

L. Transformer Options:
1. Electrostatic Shield: Each winding is independently single shielded with a full-width copper electrostatic shield

M. Closed delta 120/240-Volt secondary, 3-phase, 4-wire with center tap neutral winding transformers:
1. KVA rating indicated shall be for balanced 3-phase loading. Center tap winding shall allow for a maximum nominal 70-percent of three-phase kVA rating for unbalanced single phase neutral connected 120/240-Volt loads. The center tap winding shall be individually rated or constructed at twice the capacity of each of the other delta connected windings. (Example: a 225kVA rated center tap transformer would consist of two 75-kVA windings and one 150-kVA center tap winding).

PART 3 - EXECUTION

3.1 INSTALLATION

A. General: Install transformers where shown, in accordance with the manufacturer's written instructions and industry practices to ensure that the transformers meet the specifications. Comply with requirements of NEMA and NEC standards, and applicable portions of NECA Standard of Installation, for installation of transformers. Transformers shall be floor mounted. Ceiling mounted transformers are not acceptable.

B. Dry-Type Transformer Mounting: Indoor, floor mount transformer on properly sized Amber/Booth Type RVD rubber-in-shear vibration isolators. Transformer enclosures shall make no contact with wall surfaces.

C. Conduit directly connected to transformer enclosures shall be flexible liquid tight conduit extending for a minimum of 18-inches and a maximum of 24 inches from transformer enclosure as measured along the conduit centerline. Include a ground wire, size in accordance with NEC, internal in each length of flexible conduit.

D. Grounding: Ground and bond transformers as a separately derived system unless noted otherwise, refer to NEC 250. Installation of bonding strap or bonding conductor between ground and neutral bus shall be witnessed by the Engineer prior to applying power and terminating secondary conductors.

E. Check for damage and loose connections.

F. Set the transformer plumb and level.

G. Provide Seismic restraints where required.

H. Coordinate all work in this Section with that in other sections.

I. Verify all dimensions in the field.

J. Adjust transformer secondary voltages to provide the required voltage at the loads.

3.2 TESTING

A. Insulation Tests: Before energizing, check transformer windings for continuity.

B. Winding Current: During initial no-load energizing, check current in each primary winding.

C. Tap Settings: Measure and record load current and voltage of transformers while loaded to verify proper transformer tap settings.

D. Submittals: Furnish instruments and personnel required for tests. Submit four copies of certified test results to Engineer for review. Reports include transformer tested, date and time of tests, relative humidity, temperature, and weather conditions.

E. Performance Validation: To ensure that the products shipped to the job site meet this specification, provide on-site revenue class accurate efficiency and harmonic measurements of transformers once installed and operating at customer’s site. Data shall be collected from primary and secondary sides of the transformer simultaneously on a

synchronized cycle by cycle basis. The use of two discrete meters that are not synchronized is not acceptable. Sampling shall be of 10% of transformers on the project once installed and operating, as selected by customer. Submit a detailed report to the project engineer.

F. Identify non-compliant products to the engineer and replace at no cost to the Owner.

G. Notification: Notify Engineer in writing of any deviation from manufacturer's pre-shipment test data.

END OF SECTION

SECTION 26 24 14

TESTING, MAINTENANCE, AND MODIFICATIONS TO EXISTING SWITCHBOARDS AND FEEDER DISTRIBUTION PANELBOARDS

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Work Included: Switchboard and distribution panel work to existing switchboards or distribution panelboards 800 Amps or more and 600 volts or less as shown, scheduled, indicated, and specified.

B. Types: Work for the project includes switchboards and feeder distribution panelboards.

1.2 QUALITY ASSURANCE

A. Original Equipment Manufacturer's (OEM's) Installation and Maintenance Instructions. Coordinate with the OEM's field service representative for specific recommendations for the equipment involved prior to evaluation, testing, and maintenance procedures.

B. NEMA Compliance: Comply with National Electrical Manufacturers Association (NEMA) Standard PB1 "Panelboards", and Standard PB2, "Dead-Front Distribution Switchboards."

C. Testing shall be performed by the OEM an InterNational Electrical Testing Association (NETA) National Accredited Company (NAC) and by NETA Certified Technicians with the appropriate NETA level of certification for the testing required.

1.3 SUBMITTALS

A. Indicate Original Manufacturer's Installation and Maintenance Instructions for testing, exercising, cleaning, and lubrication where available.

B. Include electrical characteristics including voltage, frame size and trip ratings, withstand ratings, and time current curves of all equipment and components.

C. Original Manufacturer's Inspection Report when available.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Replacement parts shall be manufactured by Original Equipment Manufacturer, (OEM) when available. When OEM parts are not available, third party, UL recognized, manufactured parts may be used. Provide written confirmation on Manufacturer's letterhead indicating OEM parts are not available.

2.2 MATERIALS AND COMPONENTS

A. Except as otherwise indicated, provide manufacturer's standard materials and components as indicated by published product information, designed, and constructed as recommended, and as required for a complete installation.

2.3 NEW OVERCURRENT DEVICES AND/OR NEW ACCESSORIES

A. New Indicating Instruments where indicated: Switchboard instrumentation shall be digital display, panel mounted, rated for 120V, 60 hertz. The display unit shall be UL listed in accordance with UL 508. The electronic metering device shall have the following features:

1. Voltmeter, phase to phase and phase to ground or neutral.
2. Current, per phase RMS and 3 phase coverage.
3. Demand current per phase.
4. Power factor per phase and 3 phase average.
5. Real power, 3 phase total.
6. Reactive power, 3 phase total.
7. Apparent power, 3 phase total.
8. Frequency.
9. Average demand real power.
10. Adjustable demand interval (5 to 60 minutes).
11. Nonvolatile memory.
12. Password protected set-up and reset.
13. 3 current transformers with primary to match bus size and 5 ampere secondary with metering class accuracy.
14. Full scale readouts with the following accuracy:
    a. Current and voltage measurement +/-0.1%
    b. Power and energy +/-0.2%
    c. Frequency +/-0.5%
    d. Power Factor +/-1.0%
    e. Data update time 0.5 seconds(4 wire)
15. Metering Output.
    a. Pulse output based on kWh, kvarh, or kVAh.
    b. Analog output 4-20mA based on kWh, kvarh, or kVAh.
16. Monitoring:
    a. Harmonic analysis through 63rd with THD and TIF.
    b. Event recorder.
    c. Waveform capture.
    d. Data logger.
    e. Triggered trace memory.
17. Communication:
    a. Front port and dual rear mounted RS485 ports.
    b. BACnet protocol (coordinate with BMCS contractor).
    c. Mini RTU: digital 4 in/4 out.
    d. Analog 1 in/4 out.
    e. Local/remote display of all values.
18. Software:
    a. Windows based software shall be provided to enable setpoint programming.

B. New Feeder and Branch Protective Devices greater than 1,200 Amps shall be individually mounted:

1. Molded case circuit breakers:
    a. Adjustable: current, I^2t settings, ground fault (where required), instantaneous trip, and short time trip. Solid state trip true RMS sensing, without fusible elements; 100-percent continuous current rating.
    b. Energy Reducing Maintenance System switch with local status indicator (ERMS).
    c. Shunt trip capability and wiring to terminal block for remote shunt trip switch wiring termination weather remote trip device is indicated or not.
2. Fusible switches:
    a. Each switch shall have an individual door over the front, equipped with a voidable interlock that prevents the door from being opened when the

switch is in the ON position unless the interlock is purposely defeated by activation of the voiding mechanism. All switches shall have externally operated handles.

b. Fused switches 600 Amps and below, equipped for class J fuses.

c. Fused switches 601 Amps and above shall be equipped with Class R or L rejection type fuse holders. Class RK1 or L of ampere rating and type as indicated on the plans suitable for application of the system.

d. When required by the latest edition of the NEC or the AHJ, 1,200 Amp switches regardless of fuse size installed shall have Energy Reducing Maintenance System switch with local status indicator (ERMS).

C. Feeder and Branch Protective Devices 1,200 Amps and below shall be group mounted:

1. Molded case circuit breakers:

a. Greater than 250 Amp: Solid state true RMS sensing with adjustable: current, I^2t settings, ground fault (where required), instantaneous trip, and short time trip; 80-percent continuous current rating.

b. 250 Amp and smaller: Solid state true RMS sensing with fixed current setting by rating plug or dial. Breaker shall have adjustable instantaneous trip function with short time tracking.

c. 1,200 Amp frame circuit breakers regardless of trip shall have Energy Reducing Maintenance System switch with local status indicator (ERMS).

2. Fusible switches:

a. Quick-make, quick-break units utilizing the double-break principle of circuit interrupting to minimize arcing and pitting and shall conform to the ratings shown.

b. Individual door over the front, equipped with a voidable interlock that prevents the door from being opened when the switch is in the ON position unless the interlock is purposely defeated by activation of the voiding mechanism. All switches shall have externally operated handles.

c. 600 Amps and below equipped for Class J fuses.

d. 601 Amps and above shall be equipped for Class R or L rejection type fuse holders.

e. When required by the latest edition of the NEC or the AHJ, 1,200 Amp fused switches regardless of fuse size installed shall have Energy Reducing Maintenance System switch with local status indicator (ERMS).

PART 3 - EXECUTION

3.1 INSTALLATION, MAINTENANCE, AND MODIFICATION OF SWITCHBOARDS AND FEEDER DISTRIBUTION PANELBOARDS

A. Comply with the requirements of NEMA, NEC, and NECA Standards for installation, for installation of switchboards and panelboards. Comply with Original Manufacture's Operation and Maintenance Instructions for testing and periodic maintenance.

B. Torque all existing and new bus connections and tighten mechanical fasteners to manufacturer's specifications.

C. Install fuses, of ratings shown, in each new or modified fused switch.

D. Adjustment: Adjust operating mechanisms for free mechanical movement. Adjust circuit breaker time characteristic curves as directed by the OEM for coordination with downstream overcurrent devices.

E. Existing Indicating Instruments: Test and calibrate to original manufacturer's specifications. Replace batteries in existing digital instruments where batteries are required. Replace defective indicating instruments with new digital instruments. Provide new digital indicating instruments where indicated on the drawings.

F. Cleaning: Vacuum the interior of the existing enclosures of all dust and foreign matter. Clean all existing switch contacts according to manufacturer's instructions.

G. Lubrication: Lubricate all existing exposed switch contacts, pivot points and bearings according to manufacturer's instructions.

H. Remove any existing circuit breakers or fusible switches that are not functional or not suitable to be reused as "spares".

I. Provide filler plates where required.

J. Existing enclosures which indicate rust or corrosion shall be repainted; paint indoor non-stainless steel enclosures with ALKYD enamel coat, and outdoor non-stainless steel enclosures with epoxy enamel coat to match existing color. Do not paint over labels or listings.

K. Mimic bus: Update the existing mimic bus or provide new mimic bus to indicate busing, connections, and devices in single line form on the fronts of switchboards. Use red colored plastic strips or match exiting material and color format, fastened flat against the panel face with screws.

3.2 TESTING

A. Provide the services of a NETA NAC or Original Manufacturer's Field Services personnel for initial testing at no additional cost to the Owner. The NETA NAC or Original Manufacturer's Field Services personnel shall provide at minimum, a visual inspection of the existing switchboards or panelboard and shall provide a written report with recommendations regarding the existing condition and recommendations to further testing, maintenance, and in regard to the specified modifications of the existing switchboard or panelboard. The report shall include any deficiencies of the existing switchboard in relation to each component's intended function. In addition, provide deficiencies of the existing switchboard or panelboard with regard to the current National Electrical Code. Provide the written report to the Architect within 14 days of notice to proceed and prior to any demolition or construction. All other testing, maintenance, and modifications shall be provided by the Contractor as specified at no additional cost to the Owner.

B. Pre-Energization Checks: Before energizing, check for continuous of circuits and for short circuits. Test existing Bolted Pressure Switches according to Original Manufacture's Instructions.

C. Insulation Resistance Test: Each bus shall be insulation resistance tested after installation and modification is complete except for line and load side connections. Tests shall be made using Biddle Megger or equivalent test instrument at a voltage of not less than 1000 vDC. Resistance shall be measured from phase-to-phase and from phase-to-ground. Minimum acceptable value for insulation resistance is 2 megohms.

D. Ground Fault Protection System Test: After completion of construction and before final acceptance testing, the ground fault protection system shall be field-tested and reset to the manufacturer's recommFeedended settings for both current and time by a representative of the manufacturer's engineering service department. After the test, set

ground fault to 1,200 Amps or 50-percent of the circuit breaker or fused switch frame size, whichever is lowest.

E. All circuit breakers with adjustable trip settings shall fully tested to verify all fixed and adjustable overcurrent and ground fault trip settings are set to the proper setting and function within manufacture's recommended tolerances.

F. Provide thermal infrared scan of the under full load prior to testing/maintenance and modifications and of the modified or new equipment sections after construction as directed and witnessed by Owner. Make corrections as needed as soon as possible as directed by the Owner. Repeat the scan at the 11-month prior to close out and make corrections prior to close-out. Provide digital video documentation with test results for comparison between prior condition and post construction modifications and future tests.

G. Submittals: Furnish instruments and certified personnel required for tests. Submit 4 copies of certified test results to the Architect for review. Test reports shall include project location, testing contractor and testing technician's contact information, equipment tested, date and time of test, relative humidity, temperature, and weather conditions.

END OF SECTION

SECTION 26 24 16

PANELBOARDS AND ENCLOSURES

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Panelboards and enclosures, including cabinet, as shown, scheduled, indicated, and specified.

1.2 QUALITY ASSURANCE

A. UL Standards: Panelboards and enclosures shall confirm to all applicable UL standards and shall be UL labeled.

1.3 SUBMITTALS

A. Indicate:
1. Detailed dimensions.
2. Enclosure material, finish, and NEMA classification type.
3. Location of main circuit breaker.
4. Mounting and trim.
5. Acceptable incoming conductors' size.
6. Electrical characteristics including voltage, ampacity, overcurrent device frame size and trip ratings, bus material and rating, withstand ratings, lugs, and time current curves of all overcurrent devices and components.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Schneider Electric - Square D

B. ABB-General Electric Co.

C. Siemens

D. Eaton

2.2 MATERIALS AND COMPONENTS

A. General: Panelboards shall be dead-front type equipped with fusible switches or circuit breakers as shown and as required.

B. The overcurrent protective device short circuit, coordination and arch flash studies performed by the overcurrent protective device manufacturer shall be used by the respective switchgear vendor(s) to select appropriate equipment, switchgear, and overcurrent protective device characteristics such as but not limited to: equipment bracing, AIC rating, circuit breaker frame size and trip settings, and fuse type/class. The appropriate equipment suitable and required by the studies for code compliance shall be included with the submittal data for review and provided at no additional cost to the Owner. The appropriate equipment recommended by the studies for enhanced selective coordination or enhanced arc flash energy reduction beyond code compliance shall be included with the submittal data for review and consideration purposes by the engineer.

C. Busing Assembly: Panelboard phase, neutral, and equipment ground busing shall be copper. Bus structure and mains shall have ratings as shown and scheduled. Furnish a bare uninsulated ground bus inside each panelboard enclosure. Two section panelboards shall be connected with copper cable, with an ampacity conforming to the upstream overcurrent device. Neutral bus termination quantity for branch circuit panelboards shall match or exceed the maximum number of single pole circuit breakers the panelboard will accept.

D. Main circuit breakers and feeder / branch circuit breakers:
   1. Less than 125 Amps: Thermal magnetic with factory fixed trip.
   2. 125-600 Amps: Thermal magnetic with adjustable instantaneous trip of 5X – 10X with short time tracking.
   3. 601 Amps and larger: Solid state true RMS sensing with adjustable: current set by rating plug or adjustable dial, I^2t settings, ground fault (where required), instantaneous trip, and short time trip; 80-percent continuous current rating.
   4. Provide permanent lock-off device for all fire alarm system branch circuit breakers, for all smoke control fans and equipment, and where indicated or required for circuit breaker to be used as a remote safety disconnect switch.
   5. General requirements:
      a. Make prepared space provisions for additional breakers or fused switches so that no additional bus or connectors will be required to add circuit breakers or fused switches in the available device mounting space.
      b. Two and three pole breakers shall have internal common trips.
      c. All circuit breakers used as the main or branch mounted back-fed main shall be bolt-on. All circuit breakers used in 600 Amp and smaller panelboards shall be bolt-on breakers. Circuit breakers for distribution panelboards rated 601 amps and larger shall have plug-on or bolt-on circuit breakers.
      d. Branch circuit panelboard shall have interrupting capacity as shown or as required, but in no case less 10k AIC for 120/208/240-Volt systems, and 18k AIC for 277/480-Volt systems.
      e. 15 and 20 Amp circuit breakers for lighting circuits shall be UL listed switch duty (SWD).
      f. Personnel ground fault interrupter (GFI) circuit breakers, where shown, shall be maximum 5 mA ground fault trip and shall include a TEST button.
      g. Equipment ground fault interrupter (EGFI/EGPD) circuit breakers, where shown or required shall be 30mA ground fault trip and shall include TEST button.
      h. Circuit breakers with 1,200 Amp and larger frame shall have Energy Reducing Maintenance Switching with local status indicator (ERMS).

E. Fusible Switches for distribution panelboards: Fusible switches shall be quick-make, quick-break type. Each switch shall be enclosed in a separate steel enclosure. The enclosure shall employ a hinged cover for access to the fuses. Interlock cover with the operating handle to prevent opening the cover when the switch is in the ON position. This interlock shall be constructed so that it can be overridden for testing fuses without interrupting service. The switches shall have padlocking provisions in the OFF position. Switches shall include positive pressure rejection type fuse clips for use with UL Class J fuses and be UL labeled for 200,000 AIC.

F. Spaces: Where space for future breakers or switches is shown, panelboard enclosure shall include removable blank panels or knockouts to allow installation of future breakers or switches, prepared spaces, and panelboard busing shall be complete, including required connectors.

G. Integrated Equipment Rating: Do not apply series ratings. Each panelboard, as a complete unit, shall have a short-circuit rating equal or greater than the available short circuit current. Rating shall have been established by tests on similar panelboards with the circuit breakers or fusible switches installed.

H. GFCI circuit breakers not available in the required panel AIC rating shall be series rated with the upstream over current protection device to provide the panelboard with required AIC rating. Coordinate series rating requirements with manufacturer. Mark the panel per NEC 110. The marking shall be visible and state the following: "CAUTION-ENGINEERED SERIES COMBINATION SYSTEM RATED XXX AMPERS. IDENTIFIED REPLACEMENT COMPONENTS REQUIRED".

I. Panelboard Enclosures:
   1. Provide sheet steel enclosures, minimum 16-gauge nominal thickness, with multiple knockouts, unless shown otherwise. Provide all NEMA 1 panelboard fronts with spring-loaded door pulls, and flush lock and key, panelboard enclosures keyed alike to match the Owner's standard key system; coordinate with Owner.
   2. All NEMA 1 enclosure panelboards shall be hinged "door-in-door" type with interior hinged door with hand operated latch or latches, as required providing access only to circuit breaker or fusible switch operating handles, not to exposed energized parts. Outer hinged door shall be securely mounted to the panelboard box with factory bolts, screws, clips, or other fasteners, requiring a tool for entry. Hand operated latches are not acceptable. Push inner and outer doors shall open left to right. Manufacturer hardware (OEM), screws, and bolts shall be used to secure dead fronts and covers. Do not used third party hardware. Do not use power tools to secure panel hardware. Provide gray powder coat finish over a rust inhibitor.
   3. Equip with interior circuit directory frame, card, and clear plastic covering for panelboards.
   4. Panelboards located in kitchen preparation or natatorium areas shall have Type 316 stainless steel front, door, and trim with a NEMA 1 rating for the entire enclosure.
   5. Panelboards at exterior locations shall be NEMA 4X Type 316 stainless steel.
   6. Panelboards at hose down areas, cooling towers, in greenhouses, and other corrosive locations shall be NEMA 4X 316 stainless steel.
   7. Enclosure shall be for recessed or surface mounting as shown or as required.
   8. Enclosures shall be fabricated by the same manufacturer as panelboards to be enclosed. Multi-section panelboards shall have same physical dimensions.

PART 3 - EXECUTION

3.1 INSTALLATION OF PANELBOARDS AND ENCLOSURES

A. General: Install panelboards and enclosures, as shown, including electrical connections, in accordance with the manufacturer's written instructions, the requirements of NEC, NECA Standard of Installation, and industry practices. Circuit breakers shall be factory installed except for required field modifications due to actual site conditions.

B. Coordination: Coordinate installation of panelboards and enclosures with conductor and raceways installation work.

C. Anchoring: Anchor enclosures to walls and structural surfaces ensuring that they are permanently and mechanically secured.

D. Directory Card: Provide a typed circuit directory card(s) upon completion of work. Directory card shall be of super heavy-weight index card stock, 110 lb, white. Directory shall include type of load (i.e.: receptacles, lighting, exhaust fan, etc.) and location (i.e.: Room 102, Office, etc.) Room number shall be identified as the actual graphics room number assigned to the space and not the room number identified on the Plans. Circuits with shunt trip shall be identified with the control circuit operating the shunt trip (i.e.: Kitchen Hood No. 2). Shunt trip breakers with common trip circuit shall be grouped in the panelboard (i.e.: circuits 1, 3, 5 and 7).

E. Fuses: Install fuses, of the ratings and class shown.

F. Circuit Arrangement: Branch circuits shall be arranged to provide the best possible phase balance, unless shown otherwise.

G. Panelboards not intended to be used as service entrance (SE) rated or for establishing a separately derived neutral system shall have the factory installed neutral to ground bonding screws and straps removed and disposed of.

H. Recessed or flush mounted panelboards: Terminate spare conduits in junction box 18-inches above accessible ceiling close to panelboard location. Label junction box cover as “not used” and include panel identification.
   1. Provide (3) 1-inch and (3) ¾-inch spare conduits above accessible ceiling to j-box from each panelboard section.
   2. Where recessed panelboard is located above another building floor, also provide (3) 1-inch and (3) ¾-inch conduits to j-box in ceiling space on floor below.

I. Conductors shall be bent neatly opposite the fuse switch or circuit breaker to which they are to be attached. Vertically installed conductors shall be neatly tie-wrapped. Conductors shall be connected in a neat and professional manner. Conductors brought in from the top or bottom of the cabinet shall be bent neatly opposite the fuse or circuit breaker to which they are to be attached. Each conductor shall be run along the full height of the panel and returned to the circuit breaker or fuse location to allow relocation of the conductor to any position along the bus. Panelboard shall be cleaned of all construction debris prior to substantial completion review. Neutral and grounding conductors shall be installed similar to the phase conductors.

J. Circuit breakers and conductors installed for SPD devices shall be located on the same side as the SPD to allow the shortest and straightest run of conductors in respect to the location of the SPD device. Route all conductors to the SPD device with straight as possible run, using longest sweep bends and the shortest conductor length possible. Twist all SPD conductors and secure with tie straps wherever possible.

K. Install copper ground bus for copper ground conductors. Ground conductors size #1 and larger are to be landed to panelboard enclosure with mechanical lugs and not to ground bus.

L. Install panels so that breaker number 1 is the top left breaker.

M. In panels that contain multi-layered neutral bus, install neutrals beginning with the back neutral bus row and work forward. Do not make up neutrals on front neutral bus row unless all other rows are full.

N. Label breaker mounting space with stick-on number labels.

O. Mount the fully aligned panelboard such that the maximum height of the top circuit breaker above the finished floor shall not exceed 78-inches. Mount panelboards as high

as practical and such that the bottom of the cabinets will not be less than 6 inches above the finished floor.

3.2 TESTING

A. Before energizing, energization, check for continuity of circuits and short circuits.

B. Provide thermal infrared scan of panelboards under full load as directed and witnessed by Owner. Correct any deficiencies causing abnormal heating and repeat the scan. Provide digital video documentation with deficiencies corrected for comparison to future test. Make corrections as needed as soon as possible as directed by the Owner. Repeat the scan at the 11-month prior to closeout, and make corrections prior to close-out.

END OF SECTION

SECTION 26 24 25

ENCLOSED SWITCHES

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Safety and disconnect switch work where required, scheduled, indicated, specified, and required.

B. UL Approved: Safety and disconnect switches shall have UL approval and the UL label.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Schneider Electric - Square D

B. ABB-General Electric Co.

C. Siemens

D. Eaton

2.2 ENCLOSED SWITCHES

A. General: Provide heavy duty type, dead-front, sheet steel enclosed, surface-mounted safety switches of the type and size indicated. Safety switches shall be rated for the voltage of the circuit where they are installed. Safety switches used as motor disconnects shall be rated for the motor horsepower served.

B. The overcurrent protective device short circuit, coordination and arch flash studies performed by the overcurrent protective device manufacturer shall be used by the respective switchgear vendor(s) to select appropriate equipment, switchgear, and overcurrent protective device characteristics such as but not limited to: equipment bracing, AIC rating, circuit breaker frame size and trip settings, and fuse type/class. The appropriate equipment suitable and required by the studies for code compliance shall be included with the submittal data for review and provided at no additional cost to the Owner. The appropriate equipment recommended by the studies for enhanced selective coordination or enhanced arc flash energy reduction beyond code compliance shall be included with the submittal data for review and consideration purposes by the engineer.

C. Switch Mechanism:
   1. Safety switches shall be quick-make, quick-break type with permanently attached arc suppressor. Constructed so that switch blades are visible in the OFF position with the door open. The operating handle shall be an integral part of the box, not the cover. Switch shall have provision to padlock in the OFF position. Safety switches shall have a cover interlock to prevent unauthorized opening of the switch door when the switch mechanism is in the ON position, or closing of the switch mechanism when the switch door is open.
   2. Cover interlock shall have an override mechanism to permit switch inspection by authorized personnel. Current-carrying parts shall be constructed of high conductivity copper with silver-plated switch contacts. Lugs shall be suitable for copper conductors and front removable.

D. Neutral: Provide safety switches with number of switched poles indicated. Where a neutral is present in the circuit, provide a solid neutral with the safety switch. Where a ground conductor is present in the circuit, provide a separate solid ground with the safety switch.

E. Auxiliary Contacts: Disconnect switches related to all smoke control fans shall have auxiliary contacts for fire alarm system monitoring of the position of the disconnect switch.

2.3 ENCLOSED SWITCHES WITH OVERCURRENT AND/OR GROUND FAULT PROTECTION

A. Overcurrent protective devices 1,200 Amps and below:
   1. Where switch is intended as a building service disconnect provide solid neutral and ground bus and service entrance SE rating.
   2. Molded case circuit breakers:
      a. Greater than 800 Amp: Solid state true RMS sensing with adjustable: current, I^2t settings, ground fault (where required), instantaneous trip, and short time trip; 80-percent continuous current rating.
      b. 800 Amp and smaller: Solid state true RMS sensing with fixed current setting by rating plug or dial. Breaker shall have adjustable instantaneous trip function with short time tracking.
      c. 1,200 Amp and larger frame circuit breakers regardless of trip shall have Energy Reducing Maintenance System switch with local status indicator (ERMS).
   3. Fusible switches:
      a. Quick-make, quick-break units utilizing the double-break principle of circuit interrupting to minimize arcing and pitting and shall conform to the ratings shown.
      b. Individual door over the front, equipped with a voidable interlock that prevents the door from being opened when the switch is in the ON position unless the interlock is purposely defeated by activation of the voiding mechanism. All switches shall have externally operated handles.
      c. 600 Amps and below equipped for Class J fuses.
      d. 601 Amps and above shall be equipped for Class R or L fuses.
      e. When required by the latest edition of the NEC or the AHJ, 1,200 Amp fused switches regardless of fuse size installed shall have Energy Reducing Maintenance System switch with local status indicator (ERMS).

B. Ground Fault Interrupter (GFI) protection: Where shown or required, ground fault protection shall be achieved with adjustable pickup for ground fault currents, field-adjustable from 200 amperes and instantaneous to 60 cycle time delay. The ground fault protection system shall include necessary current sensors, internal wiring, and relays to coordinate opening the monitored faulted circuits.
   1. Ground fault protection shall be set at minimum setting for both current and time during construction. The manufacturer shall include in the submittal data the minimum setting of the device and the recommended setting for normal building operation.
   2. The ground fault system shall be factory-tested before shipment as specified:
      a. The manufacturer shall provide a factory ground fault protection system test for circuit testing and verification of tripping characteristics. The manufacturer shall pass predetermined values of current through the sensors and measure the tripping time for each phase and neutral. The measured time-current relationships shall be compared to the trip-characteristic curves. If the ground fault device trips outside the range of values indicated on the curve, the ground fault device shall be replaced

or recalibrated.

b. Relays, electrically operated switches, shunt-trip switches, circuit breakers, and similar items shall have proper voltages applied to their circuits and satisfactory operation demonstrated.

c. Upon completion of the factory ground fault protection system test, the current and time on each ground fault device shall be set to minimum values.

2.4 ENCLOSURES

A. Enclosures in exterior locations shall be NEMA 4X stainless steel.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General: Install safety and disconnect switches where required or indicated, in accordance with the manufacturer's written instructions, requirements of the NEC, NECA Standard of Installation, and industry practices. Provide fuse identification label when fused switches are required showing type and size inside door of each switch. Include devices in coordination study to indicate overcurrent devices will selectively coordinate.

B. Location: Provide safety switches within 50’ and in sight of motor served. There shall be minimum code required clearance in front of safety switch and a clear path in which to access the switch. (i.e.: not having to walk and/or stand on obstacles such as drain pans on floor to service).

C. Supports: Provide all safety and disconnect switches with galvanized angle or other supports where mounting on wall or other rigid surface is impractical. Switches shall not be supported by conduit alone. Where safety and disconnect switches are mounted on equipment served, the switch shall not inhibit removal of service panels or interfere with access areas, not void the warranty of the equipment served. Provide mounting hardware that will allow removal of safety and disconnect switches with common work tools. Do not utilize drive pin anchors through enclosure.

D. Ground Fault Interrupter (GFI) test and settings: Where adjustable ground fault interrupter settings are provided or required, after completion of construction and before final acceptance testing, the ground fault protection system shall be field-tested and reset to the manufacturer's settings for both current and time by a representative of the manufacturer's engineering service department. After the test, set ground fault to 50-percent of the overcurrent device rating.

E. Safety and Disconnect Switches: Install disconnect switches for motor-driven equipment, appliances, motors, and motor controllers within sight of the controller position unless indicated otherwise.

F. Provide disconnect switch for electric duct heaters.

3.2 TESTING

A. General: Before energizing, check for continuity of circuits and short circuits.

END OF SECTION

SECTION 26 29 00

MISCELLANEOUS ELECTRICAL CONTROLS AND CONTROL WIRING

PART 1 - GENERAL

1.1 WORK INCLUDED

A. Miscellaneous electrical equipment, controls, and control wiring work is as shown and scheduled, and as specified.

B. Types: Miscellaneous electrical equipment, controls and control wiring specified in this Section include, but are not limited to, the following:
   1. Miscellaneous Electrical Controls:
      a. Photo Sensors
      b. Time switches.
      c. Door bells/buzzers
      d. Safety notification devices
   2. Miscellaneous Control Wiring:
      a. Stop-start stations and inter-connecting and interlock wiring for motors, controllers, air-cooled condensing units, interlocks, safety devices, and similar items.
      b. Capacitor control wiring.
      c. Additional control wiring and safety devices as shown and specified.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Time clocks:
   1. Intermatic Time Controls
   2 Tork

B. Door bells, buzzers:
   1. Edwards Signaling

2.2 EXTERIOR LIGHTING CONTROL - When BMCS exterior lighting control or other dedicated lighting control system is not specified elsewhere or provided

A. Photo Sensors: Self-contained, adjustable, weatherproof Photo Sensor designed for mounting on an outdoor junction box.

B. Time Switches: Tork #DLC400 BP with USB-MMP memory module and software. Seven-day, four-zone digital astronomic electronic time switch with integral photo sensor with 6-month battery back-up memory. Time switches shall be installed in flush or surface mounted NEMA enclosure as required.

C. Control Relays: As required for control of lighting contactors.

2.3 DOOR BELLS, BUZZERS AND CONTROLS

A. Vibrating bell for high ambient noise areas (commercial kitchens, industrial manufacturing, warehouses, and outdoor locations: Edwards Signaling #340-4G5, 24VAC, 4-inch, 98dB at 1m.

B. Vibrating buzzer for indoor small areas: Edwards Signaling #340A-G5, 24VAC, 80dB at 1m, volume control.

C. Push button: Edwards Signaling #691-W flush center push button with locknut, #147-1 mounting plate.

D. Transformers: Edwards Signaling #598 120:24VAC, 30VA.

2.4 WIRING AND RACEWAYS

A. Line Voltage Control Wiring: As specified in Section 26 05 19.

B. Low Voltage Control Wiring: As specified in Section 26 05 19, except that conductors shall consist of a multi-conductor jacketed cable whenever possible.

C. Raceways: Raceways for line voltage and low voltage control wiring shall be as specified in Sections 26 05 19 and 26 05 37.

PART 3 - EXECUTION

3.1 INSTALLATION OF MISCELLANEOUS ELECTRICAL CONTROLS

A. Install miscellaneous electrical equipment and control devices as required, in accordance with NECA Standard of Installation, and industry practices.

B. Conductors: Connect electrical conductors to miscellaneous electrical control devices in accordance with equipment manufacturer's written instructions and wiring diagrams. Wherever possible match conductors of the electrical enclosures as shown. Ensure they are complete, including control wiring and devices.

C. Photo Sensors and Time Switches: Photo Sensor and time switch settings shall be as directed by the Owner. Where a Building Management Control System (BMCS) for exterior lighting or other exterior lighting control system is specified or indicated, provide control of lighting from that respective system.

D. Provide door bells/buzzers, momentary contact push buttons, transformers, and wiring for occupant notification as required. Provide doorbell push button(s) at each delivery service door for kitchens, warehouses, manufacturing facilities, etc. Provide door bells in high ambient noise areas including but not limited to commercial kitchens, warehouses and manufacturing facilities. Provide door buzzers in the manager’s and/or facility administrative offices directed by Owner. Locate bells and buzzers above 96-inches or as directed by Owner/Architect. Locate devices to avoid conflicts with other wall mounted equipment or facility operations.

E. Line and Low Voltage Control Wiring: Line and low voltage control wiring shall be installed in a suitable raceway.

F. Connections: Refer to Section 26 05 35 for connections to equipment.

END OF SECTION

SECTION 26 43 00

SURGE PROTECTION DEVICES

PART 1 - GENERAL

1.1 DESCRIPTION

A. The Surge Protection Device (SPD) covered under this section includes service entrance type surge protection devices suitable for use as Type 1 or Type 2 Devices per UL1449 5th Edition, applied to the line or load side of the utility feed inside the facility. SPDs shall be connected in parallel with the facility's wiring system. The unit shall be manufactured in the USA by a qualified manufacturer of suppression filter system equipment, which has been engaged in the commercial design and manufacture of such products for a minimum of five years.

B. Contractor shall provide all labor, materials, equipment, and incidentals as shown, specified and required to finish and install surge protection devices.

1.2 QUALITY ASSURANCE

A. Reference Standard: Comply with the latest edition of the applicable provisions and recommendations of the following, except as otherwise stated in this document:
   1. UL 1449 Fifth Edition
   2. ANSI/IEEE C62.41, Recommended Practice for Surge Voltages in Low-Voltage AC Power Circuits.
   3. ANSI/IEEE C62.45, Guide for Surge Testing for equipment connected to Low-Voltage AC Power Circuits.
   4. IEEE 1100 Emerald Book.
   5. National Fire Protection Association (NFPA 70 (NEC), 75, and 78).
   6. UL 1283 – Electromagnetic Interference Filters

B. When requested for verification, provide copies of the following:
   1. Copies of actual let through voltage data in the form of oscilloscope results for both ANSI/IEEE C62.41 Category C3 (combination wave) and B3 (Ring wave) tested in accordance with ANSI/IEEE C6245.
   2. Copies of test reports from a recognized independent testing laboratory, capable of producing 200kA surge current waveforms, verifying the suppressor components can survive published surge current rating on both a per mode and per phase basis using the ANSI/IEEE C62.41 impulse waveform C3 (8 x 20 microsecond, 20kV/10kA). Test data on an individual module is not acceptable.

1.3 SUBMITTALS

A. Submit shop drawings complete with all technical information for specific unit dimensions, let through voltage data, detailed installation instructions, maintenance manual, and wiring configuration.

B. Provide detailed marked-up copy of this specification with line-by-line compliance or exception statements to all provisions of this specification.

C. Copies of Manufacturer’s catalog data, technical information and specifications on equipment.

D. Copies of documentation stating that the Surge Protection Device is listed from a

Nationally Recognized Testing Laboratory (NRTL) (UL, ETL, etc.) and are tested and multi-listed to UL 1449 5th Edition and UL 1283.

F. Copy of warranty statement clearly establishing the terms and conditions to the building/facility owner/operator.

1.4 WARRANTY

A. The manufacturer shall provide a minimum 20-year warranty for high and very high exposure SPDs. Very high exposure unit warranties shall include exposure to temporary extended over-voltage conditions. Provide a minimum 15-year warranty for all medium exposure SPDs, and a minimum 10-year warranty for all other SPDs for parts from date of substantial completion against failure. Contractor shall assist the Owner with manufacturer warranty registration.

PART 2 – PRODUCTS

2.1 APPROVED MANUFACTURER

A. Low exposure, minimum 10-year parts warranty, minimum 50k Amps per mode, 100k Amps per phase, Type 1 and Type 2.
   1. Recessed mount panelboard extension with brushed stainless-steel front:
      a. ACT Communications:471- ###V-050-SS-F-PB flush series.
      b. DEHN Current Technology PX3-050-VVV- #X-SF-X-F- # series.
      c. SST Southern Tier Technologies T45-VVVV-50-AWAJ2-C-RKSS (stainless steel front).
      d. PSP H#C200-04NT1-H4-FMCSS series (stainless steel front).
      e. SSI Surge Suppression, Inc. CSMx12-FMPxSS series.
   2. Branch panelboard surface mounted:
      a. ACT Communications 455 series.
      b. DEHN Current Technology CG3 60 series.
      c. SST Southern Tier Technologies T45-VVVV-50AWAJ2-C
      d. PSP H#C200-04NT1 series
      d. SSI Surge Suppression, Inc. CSMx12 series.

B. Medium exposure, minimum 15-year parts warranty, minimum 120k Amps per mode, 240k Amps per phase, Type 2.
   1. ACT Communications 471 series.
   2. DEHN Current Technology CGP3 125 series.
   3. SST Southern Tier Technologies T45-VVVV-120A series
   4. PSP H#C200-04NT1 series
   5. SSI Surge Suppression, Inc. CSMx24 series

C. High exposure, minimum 20-year parts warranty, minimum 200k Amps per mode, 400k Amps per phase, Type 2 SPD.
   1. ACT Communications 471 x200 series.
   2. DEHN Current Technology TG3 200 series.
   3. SST Southern Tier Technologies T45-VVVV-200A series
   4. PSP H#C200-04NT1 series
   5. SSI Surge Suppression, Inc. CHLxM series.

D. Very high exposure at service entrance 1,201 Amps and above: Minimum 20-year parts warranty; minimum 300k Amps per mode; 600k Amps per phase, Type 1 and 2 SPD:
   1. ACT Communications 471 x300 SEL series.
   2. DEHN Current Technology SEL3 300 series.

The service entrance protector shall incorporate a combination of TPMOV and Selenium technology allowing for transient surge and temporary over voltage protection. The unit shall be able to prevent common temporary over voltages and high impedance faults from damaging the MOVs, increasing their longevity and ability to protect the critical load. Limited and Intermediate current TOVs can be caused by a loss of the neutral conductor in a split phase or three phase power system. The available fault current will be determined by the impedance of the loads connected to the phases opposite the SPD and are typically in the range of 30A to 1000A. Minimum 20-year parts warranty, extended over-voltage protection, minimum 200k Amps per mode, 400k Amps per phase, Type 2 SPD. The Selenium elements must limit voltage to the MOV as a percent of nominal as outlined below:

Overvoltage seen by MOVs as % of Nominal				
	available current			
time	30A	100A	500A	1000A
1 cycle	120%	130%	150%	160%
10 cycles	130%	150%	160%	160%
30 cycles	140%	150%	160%	160%

*To verify damage to the MOVs has been mitigated, the percent overvoltage seen at the MOV must be less than 200% for split-phase applications or 173% for three-phase applications (100% is nominal).

2.2 MANUFACTURED UNITS / ELECTRICAL REQUIREMENTS

A. Declared Maximum Continuous Operating Voltage (MCOV) shall be greater than 115 percent of the nominal system operating voltage and in compliance with test and evaluation procedures outlined in the nominal discharge surge current test of UL1449, section 37.7.3. MCOV values claimed based on the component's value or on the 30-minute 115% overvoltage test in UL1449 will not be accepted.

B. Unit shall have not more than 10% deterioration or degradation of the UL1449, Voltage Protection Rating (VPR) due to repeated surges.

C. Protection Modes SVR (6kV, 500A) and UL1449 VPR (6kV, 3kA) for grounded WYE/delta and High Leg Delta circuits with voltages of (480Y/277), (208Y/120), (600Y/347). 3-Phase, 4 wire circuits, (120/240) split phase shall be as follows and comply with test procedures outlined in UL1449: Values Depicted are based on a system Without Disconnect / With Disconnect

System Voltage	Mode	MCOV	UL 1449 VPR Rating
120/240	L-N	150	700/1200
120/208	L-G	150	700/1200
	N-G	0	900/1200
	L-L	300	1000/1200
277/480	L-N	320	1000/1200
	L-G	320	1200/1200
	N-G	0	1200/1500
	L-L	550	1800/1800

D. Electrical Noise Filter- each unit shall include a high-performance EMI/RFI noise rejection filter. Noise attenuation for electric noise shall be as follows using the MIL-STD-220A insertion loss test method.
1. 14 dB from 10 kHz to 1 MHz.

E. Each Unit shall provide the following features:
   1. Phase Indicator lights easily visible in high ambient light conditions, Form C dry contacts, counter and audible alarm.
   2. Field testable while installed.
   3. High performance interconnecting cable for hard wired non-pigtail units.
   4. The UL 1449 Voltage Protection Rating (VPR) shall be permanently affixed to the SPD unit.
   5. The UL 1449 Nominal Discharge Surge Current Rating shall be 20kA
   6. The SCCR rating of the SPD shall be 200kAIC without requiring an upstream protection device for safe operation.
   7. The unit shall be listed as a Type 2 SPD per UL1449.
   8. Power wiring: SPD shall be equipped for hard wiring and shall have mechanical lugs that can accept up to #2 AWG wire on High and Very High Exposure units and up to #6 on Medium and Low Exposure units.

2.3 POWER CABLES FOR CONNECTION

A. Power wiring: Conductors between all high and very-high SPDs and switchgear shall be high performance interconnect system “Low Z Cable” cables with Ultra Low impedance characteristics at 10kHz and above.

B. High Performance Low Impedance cable for hard wired SPDs shall be #6 AWG minimum for Very High, High, and Medium Exposure SPDs and #10 AWG minimum for Low Exposure SPDs. Low exposure pig tail units shall utilize the factory provided cables, cut to shortest and straightest run, without splices, wiring through conduit nipple only.

PART 3 – EXECUTION

3.1 GENERAL INSTALLATION

A. The unit shall be installed as close as practical to the facility's wiring system in accordance with applicable national/local electrical codes and the manufacturer's recommended installation instructions. Connection shall be with high performance, low impedance cables in conduit and shall not be any longer than necessary, avoiding unnecessary bends. Minimum wire size and overcurrent protection device for disconnect shall be provided as recommended by the manufacturer.

B. Units specified for lighting and appliance panel boards as panelboard extensions (EGPE) shall be mounted directly above or below the first section of the panel board it is protecting. Any other mounting location will not be acceptable and shall be corrected, without exception, at no additional cost to the Owner.

C. Units specified for panelboards, switchboards, or motor control centers shall be mounted directly above or adjacent to the panelboard, switchboard or motor control center using unistrut supports secured to structure as required. Conduit length between power distribution panelboard or switchboard shall be less than two inches. Mounting above equipment is not acceptable.

D. Overcurrent device and conductors for devices shall be the maximum recommended by the manufacturer. Manufacturer’s recommendations shall prevail over the information given in the plans and specifications.

E. Provide recessed mounted panelboard extension type enclosures for devices protecting recessed panelboards. Enclosure front shall match panelboard front material and finish.

Provide brushed stainless-steel front at kitchens and food processing areas.

3.2 UNIT SELECTION BASED ON EXPOSURE LEVEL

A. (SPDSEL) Provide very-high exposure SPDs with Selenium and TPMOV technology for the following new electrical or where indicated:
   1. Service entrances with very high transient exposure and/or subject to utility temporary over voltages and/or projects deemed Mission Critical.

B. (SPDH) Provide high exposure SPDs for the following new electrical equipment or where indicated:
   1. Service entrance rated above 800 Amps.
   2. Switchboards located outside.

C. (SPDM): Provide medium exposure SPDs at the following new electrical equipment or where indicated:
   1. Service entrance rated 401 - 800 Amps.
   2. Panelboards above 600 Amps.
   3. Motor control centers.
   4. Non-service entrance switchboards.

D. (SPDL): Provide low exposure SPDs at the following new electrical equipment or where indicated:
   1. Service entrance rated 400 Amps and below.
   2. Panelboards 600 Amps and below.

3.3 TESTING

A. Factory Trained Representative shall provide start-up to include initial verification of proper installation, shortest cable connection, and initiate factory warranty. The technician will be required to do the following as a minimum:
   1. Verify the installation follows applicable national / local electrical codes related to SPDs and the manufacturer's Installation, Operation and Maintenance Instructions and recommendations.
   2. Verify overcurrent device rating.
   2. Verify all wiring connections and installation conforms to manufacturer’s recommendations.
   3. Record information for each product installed and include in O&M Manual

B. A copy of the Factory diagnostic test report and written approval of the installation shall be included with the Electrical Operating and Maintenance Manual. The Contractor shall make all adjustments, changes, corrections, etc. as required by the Factory Trained Representative so that the installation follows the manufacturer’s installation and operation instructions without additional charge to the Owner.

END OF SECTION

SECTION 27 41 33

DISPLAY SYSTEMS

PART 1 - GENERAL

1.1 GENERAL REQUIREMENTS

A. LED display manufacturers and direct sale representatives are invited to provide a proposal based on specifications provided in this document for the Beaumont ISD Doggett Family Stadium, 5250 Bayou Willow Parkway, Beaumont, TX 77707

B. All requirements in this section of the solicitation as well as in other sections of the solicitation, Referenced Documents or Practices, and any Amendments to the solicitation shall be considered a part of this section. Each Offeror to the solicitation is responsible for becoming thoroughly familiar with all its contents as to requirements which affect this Section. Contractor is responsible for coordinating all items of this section with the Owner and Consultant to ensure that all items of this section are furnished in accordance with Owner standards.

1.2 REFERENCES

A. National Fire Protection Association (N.F.P.A.).

B. American National Safety Institute (A.N.S.I.).

C. National Electrical Code (N.E.C.).

D. Underwriters Laboratories (U.L.).

E. Electronics Industries Association (E.I.A).

F. Standard for Electric Signs, UL-48.

G. Standard for Control Centers for Changing Message Type Signs, UL-1433.

H. Federal Communications Commission Regulation Part 15.

I. Project Drawings

1.3 DEFINITION OF TERMS AND ABBREVIATIONS

A. Provide: to supply and install.

B. Supply: to supply but not install.

C. Install: to install but not supply.

D. OFE: Owner furnished (supplied) equipment. Equipment will be provided to contractor for installation.

E. NIC: Not In Contract. Refers to items that are not included in the scope of work outlined in this section but may be shown for coordination purposes or reference.

F. Future: Equipment that will be provided by owner later. Accommodations shall be

provided for future equipment as shown on the drawings.

G. Contract Documents: This specification and included conceptual display drawings

H. Consultant: Salas O'Brien

I. Owner: BEAUMONT ISD ISD

J. VM: Value Management

1.4 RESPONSIBILTY AND RELATED WORK

A. Coordinate scheduling of work with the Owner.

B. The systems described in this section will be called the "Display Systems" and the installer will be named "The Contractor." The Contractor will provide all labor, materials, equipment, necessary tools, test equipment, hoisting, transportation, supervision, and coordination necessary to complete the installation of the "Display Systems" as described in the construction documentation.

C. The Contract Documents are intended to include or imply all items required for the proper execution and completion of the work.

D. The Display Systems consist of the materials, equipment and systems described in this specification, related drawing details, and any schedules that are part of the contract documents. This Contract is for equipment, material, installation, and training. The work of this section includes complete and operational Display Systems.

E. The Contractor will provide minor accessories, such as connectors, adapters, matching devices, and equipment items needed for a complete system, even if not specifically mentioned herein or on the drawings, without claim for additional payment.

F. The Contractor shall provide complete, turnkey Display Systems, fully tested and ready for intended use according to the design intent of the contract documents.

G. Obtain all insurance, bonding, licenses and permits necessary to complete the work, and for operation by the Owner.

H. Contractor will comply with all union jurisdiction and prevailing wage requirements for the completion of the project.

I. If a conflict is identified between the Contract Documents and the appropriate codes and is reported to the Owner and confirmed prior to contract award, the Consultant will prepare the necessary clarification or revision. When a conflict is reported after contract award, the Contractor will propose a resolution of the conflict and, upon approval, perform related work.

J. Coordinate with other Contractors as required and in a timely fashion to convey all information (scheduling, structural, electrical, technical, or otherwise) necessary to complete the project.

K. The Contractor shall be responsible for:
   1. Verification of dimensions and conditions at the project for the display, control and replay panels, and control equipment locations prior to ordering/manufacturing.

2. Submittal of structural calculations with the shop drawing submittals concerning final connection of display to provided steel. Calculations and shop drawings shall be sealed and signed by a licensed Structural Engineer, in the project home state, retained by the Contractor. This will be for the final connection from concrete fascia to the display hangers and the End Zone Scoreboard display.
3. Provision of all transportation and hoisting.
4. Furnish protective covering during construction/installation to prevent damage or entrance of foreign matter.
5. Replace at no expense to Owner/project, product damaged during delivery, storage, or handling.
6. Provision of safe and protected storage. The owner takes no responsibility for damage or theft relating to negligence in failure to secure equipment by The Contractor.
7. Installation in accordance with the Contract Documents, manufacturer's recommendations, and all applicable code requirements.
8. Provision of complete assemblies (sub-structure, enclosure, and finishes) and all necessary attachment hardware, and framing.
9. All required material for a complete watertight enclosure including front border metals to protect and finish out the display systems. All displays to include a 2" metal framing border or as specified around the entire display.
10. Provision, termination and testing of all necessary electrical power, signal cabling, and remote operation control cabling. All panel and branch circuit distribution is by THIS CONTRACTOR.
11. Provision of all transmission, processing, receiver electronics to distribute control signals to the display.
12. Coordination of any installation of rack mounted devices into equipment racks (provided by others) with other related trades with equipment in the same space.
13. Connecting ground point to all equipment in accordance with NEC code and standards specified. Coordinate with Division 26.
14. Provision of a dielectrically insulated ground joint connection that will isolate any conduit systems from the chassis of the rack where conduits enter any equipment racks furnished under this section.
15. UL Certification of all pertinent equipment including control and display systems attached with identification labels. If any equipment requiring certification is not UL Certified, then The Contractor shall arrange onsite inspections and certification at no additional expense to the contract/project.
16. All control equipment to operate the display shall be located in the primary rack room with KVM access at the on-glass scoreboard operator position and Nevco operator position. Any necessary signal/control conduit and cable raceways for cable runs to and from display components will be provided by others. All fiber to be provided by the Contractor.
17. All submittals detailed within the Contract Documents
18. Initial tests and adjustments
19. Final performance testing, calibration, and adjustment prior to first use.
20. Maintenance services contract, warranty for equipment and workmanship.
21. Provision of required shelving and inventory labels for all spare equipment.
22. Provisions of pre-event cleaning of the displays within 14 days of the first event held in facility for the first year.
23. Provide protection for the existing finishes during installation. Any damage caused during construction is the full responsibility of the Contractor to repair or replace at no additional cost.

1.5 PROJECT SCHEDULE

A. Coordinate with the Owner for all final scheduling of work.

1.6 SYSTEMS DESCRIPTIONS

A. LED Displays
   1. Main Scoreboard
      a. 60’ W x 31’-5” H, 10mm

B. Full System Base Warranty, 10 Years.
   1. Warranty to include at no cost to the owner:
      a. Factory repair of failed parts
      b. Shipping to and from the site.
      c. Labor to replace failed parts.
      d. Reconfiguration and recalibration of any display due to a failure.

C. Maintenance Plan

   1. Provide 2 technicians for the following:
      a. 2 Days onsite for Pre-Season startup maintenance.
      b. Event Day coverage including startup and adjustments as required for first event.

1.7 SUBMITTALS

A. BID SUBMITTALS
   1. Offeror’s bid shall be valid for 120 days without claim for additional payment.

   2. Offeror must have previously installed at least five jobs using similar product and similar display size to the job described in the solicitation. The jobs of similar product must been completed within the last five years within the USA. In your proposal, submit name, phone number, and current email address of contact person for each representative project reference. Also, in your proposal, identify at least one such completed job available for inspection by the Consultant and Owner’s Representatives.
   3. In its proposal, Offeror will confirm in writing that it has at least five years of experience with equipment and systems of the types specified in the solicitation, that it maintains a fully staffed and equipped service facility in the region of the United States that includes the project home state, and that it is franchised dealer and authorized service facility for any equipment used on the contract project not manufactured by the offeror, and that the offeror is properly licensed to work in the project home state.
   4. In its proposal, Offeror must summarize their process to include but not limited to procurement of LEDs, module assembly, cabinet assembly, quality control points and final testing procedures.
   5. In its proposal, Offeror will confirm in writing that any Sub-contractor it uses in performance to contract has five years of experience with the primary contractor’s / offeror’s equipment and systems and that the subcontractor’s company is properly licensed to work in the project home state. In its proposal, Offeror will identify all Subcontractors on the Proposal Response team and provide a detailed scope of work for each Subcontractor it plans to use in performance to contract.
   6. In its proposal, Offeror will submit resumes of its project manager, lead engineer and lead installers that will be working on the contract project. This will include key team members of any Sub Contractor that the offeror plans to use in performance to contract. Resumes must be submitted with offeror’s proposal response.
   7. In its proposal, Offeror will submit preliminary power requirements for its proposed

display, submit viewable dimensions and horizontal/vertical physical pixel count of its proposed display, submit preliminary total weight and structural calculations for its proposed display.

8. In its proposal, Offeror will submit a schedule to indicate durations for shop drawing submittal, procurement, and fabrication, shipping requirements, installation timelines for each major system and test and commissioning sessions. Coordinate these milestone dates in the schedule with project schedule and intended completion dates for the contract project in the solicitation.

B. PROJECT SUBMITTALS:

1. Product Data Submittal: Contractor shall submit manufacturer's product data sheets for each item of equipment to be used for the contract project in electronic form via email as PDF electronic files.
2. Shop Drawings Submittal: Contractor shall indicate complete details and dimensions of work to be performed and indicate types and locations of equipment, fabricated equipment, and other details to completely describe work to be performed.
3. Contractor shall submit the above information via email as PDF electronic files for review and distribution to the Owner and the consultant. There shall be no contract work authorized on site without the prior submittal of a complete set of shop drawings. Any exceptions to this contractual requirement must be in writing and approved by the Owner. Details to include the following:
    a. Dimensioned Plan, Elevation and Section Views of all displays.
    b. Drawings showing and connection of the installer supplied equipment to the structure at each different condition.
    c. Wiring diagrams. Complete, detailed wiring diagrams for all systems including cable types, identification and color codes, and detailed wiring of connections, both at equipment and between equipment racks and wiring in conduit.
    d. Proposed Control and Relay Panel locations (Plan).
    e. Location of all equipment in racks, consoles, millwork, enclosures with dimensions; wire routing and cabling within housings; AC power outlets, terminal strip and UPS locations.
    f. Conduit riser diagrams for all systems.
    g. Schematic drawings of any custom circuitry or equipment modifications, including connector pinouts and component lists.
    h. Equipment rack elevations.
    i. Schedule of terminations for all systems.
    j. Terminal strip layouts for all proposed terminal strips.
    k. Power consumption at 50 % and 100 % illumination levels for each display.

C. CONTRACT CLOSEOUT SUBMITTALS

1. Contractor shall keep a single complete set of approved shop drawings on the project site for the full duration of the project until after the final system commissioning. Contractor shall note any changes made during installation on these single set of drawings. Contractor shall submit three corrected sets of reproducible drawings showing work as installed. All “as-built” drawings are to be submitted both in electronic form (ACAD 2021 or later) and in hard copy (42”x30”).
2. Owner Reference Manual: Before owner training commences, Contractor shall submit the following as Adobe .pdf files on 3 USB drives and as hard-copy in a single 3 ring binder with project title. Contractor shall submit individual sub-directories/tabular dividers with the following headings:
    a. A legend with acronyms and abbreviations.
    b. A catalog of all equipment, organized by manufacturer, model, serial

number, including the room and rack number where the device is located.

c. System Operation Instructions: Narrative verbiage with photographs and diagrams detailing operational procedures for all equipment as a system.

d. Manufacturer's User Manuals for all equipment.

e. Warranty Information for all equipment. Include warranty period and service department contact information.

f. System Maintenance Instructions: Narrative verbiage with photographs and diagrams detailing owner's responsibilities for preventative maintenance to include schedules and any specific products, procedures or specialized/custom tools required for maintenance of the display system.

g. As-Built Drawings fully legible at C size (24"x18") bond folded appropriately for binder.

h. A list of all test results performed on the systems as outlined in Section 3.4 proving the systems to be in full compliance.

i. A list of spares in inventory to include quantity, manufacturer, model number, and serial number.

1.8 CODE COMPLIANCE

A. All work performed by the Contractor and materials used by the Contractor in performance to the contract shall comply with all applicable codes and regulations to meet or exceed Federal, State, City, and Local Building Codes and Regulations (including seismic). Contractor shall advise the Owner if anything in the Drawings or Specifications is out of compliance with codes and/or laws prior to proposal submission.

1.9 PROJECT CONDITIONS

A. Contractor shall notify the Owner in writing of any issues on the job site negatively affecting the contractor's pursuance of work under their scope. Contractor shall submit recommendations for resolution and assist in coordinating solutions with other trades.

B. Contractor shall verify position and elevation of structure and its layout for display equipment. Contractor shall verify dimensions by field measurements.

C. Contractor shall verify during the design phase scoring tables do not impede access to courtside floor boxes while in game position.

D. Contractor shall verify mounting structure can support the display system weight loads in addition to any required attachment and structural support metals.

E. Electric circuits and whips to connect to each display cabinet at each catwalk level for the display will be provided by the owner.

1.10 GUARANTEES

A. Contractor shall warrant labor and materials on the display systems for TEN (10) years following the date of Final Owner Acceptance as base offering.

B. Within the warranty period, Contractor shall:

1. Make available an exchange program to supply replacement parts for components that fail during the coverage period. To minimize downtime, the exchange parts will be shipped on the same day the order is received or on the following day. The

manufacturer will also enclose an air bill for return of the defective components.

2. Make available a help desk staffed by experience technicians and coordinators who are thoroughly familiar with the scoreboard and matrix display products and available for technical support. This contractor help desk staff must be available at no additional cost to the customer and provide an "on-call" service during weekends.
3. Make available access to a local Authorized Service Company that can repair or replace any faulty item the next day without charge, including parts and labor and assist owner's staff in replacing, reprogramming, or recalibrating this equipment to make entire system functional.

C. This warranty shall not void specific warranties issued by manufacturers for greater periods of time. Nor shall it void any rights guaranteed to the Owner by law.

D. Contractor will make available to Owner the exact beginning and ending dates of the warranty period. Include the name of the person to call for service and telephone number. This information is to be part of Project Record Set.

E. Contractor shall submit alternate pricing for extended maintenance contracts on displays and control systems based on the above criteria.

PART 2 - PRODUCT

2.1 MANUFACTURERS

A. Recommended Display Manufacturer's and Direct Sale Representatives.

1. Manufacturers identified in this specification are listed as a standard of quality. Regardless of the length or completeness of the descriptive paragraphs herein, each device included in proposals submitted by offerors shall meet or exceed all the specifications. It is the offeror's responsibility to verify performance of intended equipment as required prior to proposal submittal.
    a. SNA
    b. Nevco
    c. Daktronics
    d. LED Partners

2. If it is determined during the evaluation process that each device included in an offeror's proposal does not meet all the specifications, then that offeror's proposal will be deemed "non-responsive" and removed from further consideration.

B. All equipment supplied will be new and meet the latest published specifications of that product. Take care during installation to prevent scratches, dents, chips, etc.

C. If product is discontinued and/or no longer publicly advertised as a part of a manufacturer's current product line-up at time of installation, the project team reserves the right to request a substitution of product for new and currently offered product of like function fulfilling the design intent. Substitution value will be based on fair market value of original product at time of bid.

2.2 SYSTEM REQUIREMENTS

A. Technical and Engineering Standards

1. General
    a. Large format display systems shall allow repair from the rear and shall allow "hot" repair while the system is operating.

2. LED Display Systems
   a. The display systems will be comprised of full color LED pixel technology capable of 10,000 cd/sq.m pixel brightness with full white (100 IRE) input.
   b. Brightness of individual adjacent LED's must vary no more than 2%, and no more than 10% across the entire display.
   c. Minimum effective color pixel density of 250,000 pixels/m2 with LED physical pixel density of 2mm in a flicker-free display.
   d. Minimum effective color pixel density of 160,000 pixels/m2 with LED physical pixel density of 2.5mm in a flicker-free display.
   e. Minimum effective color pixel density of 57,600 pixels/m2 with LED physical pixel density of 4mm in a flicker-free display.
   f. Minimum effective color pixel density of 25,600 pixels/m2 with LED physical pixel density of 6mm in a flicker-free display.
   g. Minimum effective color pixel density of 14,000 pixels/m2 with LED physical pixel density of 8mm in a flicker-free display.
   h. Minimum effective color pixel density of 9,200 pixels/m2 with LED physical pixel density of 10mm in a flicker-free display.
   i. The display system will be equipped with an illumination sensor exterior to the display and allow for both automatic and manual control of preset illumination levels in at least 10% increments up to 100%.
   j. The display must be capable of 140-degree minimum horizontal angle of viewing and 30 degree upper and 60 degree lower minimum vertical angle (defined at 50% brightness and zero color shift).

3. Control and Signal Processing/Distribution Systems.
   a. The Contractor shall provide all user interface, transmission, and processing software; all electronics; and all cabling to independently place, size, tile, layer, and control High Definition (3G-SDI SMPTE 424M) and future 4K (12G-SDI SMPTE ST 2082).
   b. All SDI video signals will be handed off in the production rack room.
   c. Primary and redundant video signals will be provided by the owner. A total of 4 signals will be fed from a local router: 2 primary, 2 redundant. The Contractor must provide single mode fiber transmitters/receivers if beyond coax distance limits for the project format.
   d. The Contractor is responsible for media playback servers for the game presentation. Additionally, the Contractor is responsible for providing a single media playback device for an emergency message on a minimum 36' x 4' portion of displays.
      1) Contractor, with owner input, shall create a football game template for video and scoring, as well as a full screen video replay preset (provided by video system 274130), and program an effect-driven transition between the two.
      2) Additionally, the Contractor shall create a generic event template for full video playback for events such as convocations.
   e. All control equipment to operate and provide signal to the displays shall be located in the production control room. The Contractor shall provide all connections, cabling, and terminations between display, operating equipment, and the production control rack room.
   f. The Contractor will provide systems for remote power up and shut down of the displays, systems will allow displays to be turned on and off from the video production equipment room in addition to within the displays.
   g. Racks to be provided by the contractor and installed in AV1.24 (BD.VR.W01 and BD.BR.W02). Provide all power distribution, lacing bars, fan top, and other accessories required to professionally install

equipment and wire. Provide rack blanks to fill all unused front rack spaces (no greater than 5RU blanks)

1) BGR-4532 (Qty: 1 or 2 as required)

h. The Contractor shall provide one remote control user interface station in the rack room to provide complete control of system input, display power up/down, freeze, position, size, aspect ratio, color, hue, contrast, brightness, and delay for use in setup, testing and operation.

B. Game Clocks (EXISTING)

1. Install game clocks and pull cables to Scoring/timing system
2. Clocks
   a. 4" red digit – 8"x1'-3"x3.25" or similar (Qty: 5)

C. KVM

1. Coordinate with 274135 contractor such that all LED processors, including this specification and 274135, are on the same KVM system and can access all LED processors from the Nevco station, or the on-glass scoreboard operator location. 274133 will provide matrix hub. 274135 will provide the user station KVM and CPU transmitter for Nevco station.
2. User station installed in BER (District AV Equip. Room 1.50J, rack VP.VR.W02)
   1) LG IPS 22" LED Display
   2) Havit KB487L-US mechanical keyboard 89 key
   3) RSF1111BK21F4K2 1U Compact Rack Mount Keyboard Drawer with Retractable Mouse pad
   4) Middle Atlantic RM-LCD-PNLK (Qty: 1)
   5) Sanwa GMATB44 wired trackball mouse
   6) KVM user station receiver
   a. The Contractor shall provide computer interfaces for all CPU devices in their scope.
      1) KVM CPU transmitter (1 per CPU) and matrix – installed in West AV Equipment Room 1.24.
   b. Processing and control equipment shall allow for external control of input selection and transitions via GPI triggers and/or RS-422/232 serial control protocols such as E-MEM or P-BUS.
   c. Processing and control equipment to receive an emergency contact closure and to display an emergency message independent of any video production control equipment.
   d. The Contractor will provide backup processing and transmission equipment in duplication of primary systems with equipment for manual switchover, distribution amplification, and/or splitting of all necessary control, data and signal cabling.
   e. The Contractor shall provide Diagnostic Software to assist the Owner in diagnosing, isolating and repairing deficiencies in the display and control system, including defective elements.
   f. The Contractor shall provide uninterruptible power supply systems for all computer interface and computer processing systems sufficient to allow proper shut down of operating systems in a power outage.
   a. APC Smart-UPS 2200VA RM 2RU LCD 120V (Qty: as required)
   g. The Contractor to provide new sports interface for scoring and to be located in the press box at the scorer's position (room 1.47A) and shall interface with all game clocks/scoreboards.
   h. The Contractor shall provide a stats/scoring interface to a broadcast character generator (by others) and the OFE Nevco LED processors (by others) that will port data and be displayed on the main screens via the broadcast switcher. Both of these systems are in 1.50J.
3. Control and Signal Processing/Distribution Cabling

a. Installation shall include all required and operationally necessary low voltage control and fiber optic cabling in unbroken/unspliced home runs from the Rack Room to each display component.
b. See schedule of wire types to be used.

4. Structural Engineering
   a. The display systems shall be designed, fabricated, and installed by the Contractor in their entirety.
   b. All necessary supporting structure, catwalks, stairways, access doors and access ladders (including fall arrest systems to code) are not part of The Contractor's scope of work.
   c. For display systems that are to attach to facility structure, reference project drawings. The Contractor shall be responsible for field verification of existing conditions, submittal of shop drawings illustrating details of structural connection of display to facility structure, and submittal of structural calculations demonstrating compliance of display connection to facility structure to all building code structural requirements. Shop drawings and calculations shall be sealed and signed by a licensed Structural Engineer in the project home state, retained by the Contractor.
   d. Provide electrolytic protection between different adjoining metals.
5. Electrical
   a. All power distribution from the disconnect to the sign to be provided by the owner.
   b. The Contractor is responsible for all power distribution inside the LED display as required.
6. Spares
   a. Supply 2% spare parts of display module type.
   b. Supply 1% spare parts of all data and signal distribution components.
   c. Provide shelving for the storage of all spare equipment.

PART 3 - EXECUTION

3.1 GENERAL

A. Coordinate work with other trades to avoid causing delays in construction schedule.

B. Mount equipment and enclosures plumb and square. Permanently installed equipment to be firmly and safely held in place.

C. Cover edges of cable pass-through holes in enclosures, chassis, racks, boxes, etc., with rubber grommets or Brady GRNY nylon grommetting. Adhesive-backed electrical tape and friction tape is not acceptable for insulating or protective purposes.

D. Provide ventilation adequate to keep temperature within equipment racks below 85 degrees Fahrenheit. This ventilation system must be temperature actuated.

E. Provide a non-fluorescent service lamp in the top of each equipment rack.

F. Provide blank rack-mount panels installed in all rack openings not occupied by equipment. Blank filler panels will not exceed five rack units in size. Custom rack panels shall be 1/8-inch- thick aluminum, standard EIA sizes, brushed black anodized finish unless otherwise noted.

G. Install rack mounted equipment with black 10-32 Phillips head machine screws.

H. Panels or equipment mounted on the rear rack rails must not block access to any front

mounted components. Front mounted equipment will be given ample space to allow for access to rear connection.

3.2 CABLING

A. Exercise care in wiring; damaged cables or equipment shall not be accepted. Isolate cables of different signals or different levels; and separate, organize, and route to restrict channel crosstalk or feedback oscillation.

B. Wiring entering equipment racks and enclosures will be run directly to equipment. Use of splices or connectors to extend cabling to equipment will not be accepted.

C. Wiring and connections will be completely visible and labeled in equipment racks and enclosures.

D. Horizontally routed wiring to equipment will be managed with lacing bars and should include a service loop for future adjustments and terminations.

E. For equipment mounted on slides, additional service loops will be provided to accommodate the full range of travel of the slides.

F. Neatly bundle excess AC power cables from rack-mounted equipment with plastic cable ties. Rack wiring to be bundled with plastic cable ties or hook and loop tie wraps.

G. All cables in cable trays shall be neatly installed with maintaining separation of the different cable types.

H. Screw Connections: Only insulated crimp on spade terminals will be used for application to barrier strips. Multiple gang lugs or ring lugs are not acceptable for this purpose.
   1. This is only applicable to stranded conductor wires. Solid conductors will be attached directly to the barrier strip.
   2. All conductors will be stripped prior to installation underneath screws on terminals. Provide crimp lugs on stranded control cables, solid conductor wire will not require crimp lugs on individual conductors. All screw terminated solid conductors will be wrapped in the same direction as screw rotation during tightening.

I. Multiconductor Cables: Follow a uniform application of color codes for multiconductor cables throughout the Facility. Where there are unused conductors or pairs in a cable assembly, they can be insulated as a group, left long enough for future termination, and folded into the connector hood. Where this is impractical, they may be folded back along the outer jacket of the cable and covered with heat-shrinkable tubing.

3.3 LABELING

A. General
   1. The attachment method for equipment identification plates will be designed for permanency unless otherwise described. All labels will be protected prior to installation and will not be installed if damaged or scratched. Follow manufacturer's recommended procedure for surface preparation, which must be free of any dust, dirt, or film.
   2. On black lamicoid panels or pushbuttons, letters shall be white; on stainless steel or brushed natural aluminum plates, or light-colored pushbuttons, letters shall be black.

3. Mount labels in a neat, plumb, and permanent manner except where indicated.

B. Rack Labels
1. Provide engraved lamicoid labels with the Rack Number on the front of each rack in 1” high Arial text.

C. Panel Labels
1. Provide engraved labels for all terminations in 1/8” high Arial text.

D. Cable Labels
1. Cables and wiring to be logically, legibly and permanently labeled for easy identification.
2. Labels on cables to be adhesive strip type covered with clear heat-shrink tubing.
3. Factory stamped heat shrink tubing may be used in lieu of the adhesive strip style label.
4. Hand-written or self-laminating type labels are not acceptable.
5. Wiring designations to be an alphanumeric code that is unique for each cable.
6. Locate the cable designation at the start and end of each cable run and within 2 inches of the point of termination or connection.
7. Actual cable designation assignments to be determined by Contractor.
8. Add cable designation codes to system schematic drawings included with Project Record Drawings.

3.4 TESTING

A. During all consultant walkthroughs, the Owner’s Representative will be present.

B. If during acceptance testing it becomes evident that further adjustment or work may be required to bring the system into compliance, the Contractor will continue to work until the system is acceptable at no additional charge over the contract price. If approval is delayed because of defective equipment, poor installation, or failure of equipment to meet the requirements of these specifications, the Contractor will pay for additional time and expenses of the Consultant at their standard rate in effect at that time, during any extension of the acceptance testing period. The Contractor will provide rental or loaner equipment to make the system operational in critical cases of equipment failure prior to contract completion.

C. Make available three portable UHF business band radios for use during acceptance testing. Radios should have a transmission range sufficient to cover entire project. Radios to include rechargeable batteries and re-charger along with "holster" for wearing on belt. Radios to be available for duration of testing process, including any follow-up visits required prior to final acceptance. Confirm that radio frequencies used are not in use elsewhere on project site.

D. System Tests
1. The following procedures will be performed prior to testing of System:
   a. Control functions shall be checked for proper operation, from controlling devices to controlled devices.
   b. Adjust, balance, and align equipment for optimum quality including brightness, viewing angles, brightness uniformity, black level uniformity, color uniformity, hue uniformity, pixel mapping, scaling and resolution of video image to meet the manufacturer’s published specifications.
   c. Allow for a continuous 48-hour period of “Burn In” running a looped test signal including equal intervals of Black, Green, Red, Blue and 100% White.

2. Display Power Down and Up Again:
   a. Display shall be adjusted to 6500K color temperature.
   b. Display shall be set at full brightness level with a standard 100 IRE white signal as its source. Screen will be allowed to stabilize and display controls shall be adjusted for a uniform brightness across the display.
   c. Both display and processing platform will be powered down together completely and then immediately powered up again.
   d. This procedure will be performed twice more in succession.

3. Uniformity At All Viewing Angles:
   a. Display shall be set at a brightness level appropriate for the facility. Screen will be allowed to stabilize and display controls shall be adjusted for a uniform brightness across the display.
   b. A signal generator will be used to generate each of the following colors for examination
      1) White (100 IRE)
      2) Black (7.5 IRE)
      3) Green
      4) Red
      5) Blue
      6) Cyan
      7) Magenta
   c. A “walk around” will be performed viewing the display at all possible angles of the display for each of the colors.
   d. Display (and overall processing) will be examined for module-to-module uniformity and pixel to pixel uniformity.
   e. Display will be measured using a spot photometer to verify manufacturer brightness and viewing angles.

4. High Contrast Image Performance:
   a. Display will be viewed in many lighting conditions.
   b. Display shall be set at a brightness level appropriate for each lighting condition. Screen will be allowed to stabilize and display controls shall be adjusted for a uniform brightness across the display.
   c. Display (and overall processing) will be examined for trueness of team colors, gamma and contrast handling.

5. Control functions shall be checked for proper operation, from controlling devices to controlled devices.
6. Installed, loose and spare equipment shall be inventoried for correct quantity.
7. Any other test on any piece of equipment or system deemed appropriate by Consultant.
8. The omission of a description of a device, function, signal path, or test in this document shall not exempt the Contractor from responsibility for checking all devices and signal paths for appropriate compliance with Industry Performance Standards and making corrections necessary to bring system(s) into compliance with the applicable standards.

3.5 TEST EQUIPMENT

A. Make available the following equipment on site for final acceptance testing. Test equipment to be available for the entire period through final system acceptance. Prior to start of testing, submit a list to the Consultant of test equipment make and model numbers that will be used.
   1. Megohmmeter.

2. Multimeter: Measurement range, DC to 20,000 Hz, 100 mV to 300 V, 10mA to 10A.
3. Spot Photometer.
4. CAT5E/CAT6 cable tester.

3.6 ACCEPTANCE

A. Preparation for Acceptance, prior to final inspection:
1. Temporary facilities and utilities shall be properly disconnected, removed, and disposed of off-site.
2. All systems, equipment and devices shall be in full and proper adjustment and operation, and properly labeled and identified.
3. All materials shall be neat, clean, and unmarred and parts securely attached.
4. All damage occurring to the facility, including broken glass, walls, doors, etc. shall be replaced or properly repaired and debris cleaned up and discarded.
5. All extra materials, portable equipment, and spares shall be delivered and stored at the premises as directed.

B. Submit a pre-commissioning systems report to the Owner and Consultant two weeks prior to the scheduled systems commissioning proving all systems to be in full compliance. Report shall include test results, date of each test, pertinent conditions such as control settings, etc., and test equipment employed. In addition, submit written notification that the installation has been completed in accordance with the requirements of this document, and is ready for acceptance testing.

C. Acceptance testing will include operation of each major system and any other components deemed necessary. Contractor will assist in this testing and supply required test equipment. Contractor will make available at least three technicians familiar with installation, available for the entire testing period (day and night), to assist in tests, adjustments, and final modifications. Tools and material required to make any necessary repairs, corrections, or adjustments will be submitted by the Contractor. The Contractor will keep a running list of all acceptance tests performed and submit a final copy of the results with the closeout submittals as listed in Part 1.6. Testing process is estimated to take 1 day up to 10 hours and may require multiple crews/ shifts.

3.7 INSTRUCTION OF OWNER PERSONNEL

A. Upon completion of the installation of the specified display systems, and prior to any facility events, make available designated operating personnel training on the equipment operation. This training will be performed at the site by the Contractor’s and the manufacturer's education staff.

B. The System Reference Manuals must be complete and on-site prior to the time of the first instruction.

C. Make available trained personnel (two technicians) to be present during a minimum of three Owner designated events. More events may be added at no charge to the Owner if the system is not functioning appropriately.

D. Coordinate schedule of instruction with the Owner subject to availability of Owner’s personnel. This may require scheduling instruction during weekends or evenings.

E. Training will be provided in a series of classes to operations personnel to review all aspects of operation and maintenance of the system. Follow-up sessions to better

enhance the operator's ability to expand or maximize the system will be made available.

F. The system training will include one (1) day or 10 hours of technical training covering the explanation of the system, including documentation, configuration, interfacing and diagnostics. Make available training of the system operators and maintenance personnel as follows:

1. System Overview: Explanation of system includes documentation, configuration, interfacing and basic diagnosis.
2. Operator Training: Training in the use of system devices including powering and general operation of overall systems.
3. Maintenance/Trouble Shooting: Advanced training in display and control system troubleshooting and maintenance. Manufacturer's representative will conduct scenario- based training creating isolated system failures requiring owner to investigate and solve system failure problems as a means of gaining hands on knowledge of the systems.

END OF SECTION

BEAUMONT INDEPENDENT SCHOOL DISTRICT
STADIUM SCOREBOARD ELEC

Salas O'Brien

Houston
10930 W. Sam Houston Pkwy North, Suite 900
Houston, TX 77064
Salas O'Brien Registration: F-4111

Salas O'Brien Project Number: 2550-02337-00

2025-2026 BEAUMONT ISD BOARD OF TRUSTEES

Dr. Shannon Allen - Superintendent

Thomas Sigee Sr. - President

Robert C. Dunn Sr. - Vice President

Denise Wallace-Spooner - Secretary

Yolanda Avery - Trustee


Joe A. Evans Jr. - Trustee

Matilda Tillie Hickman -Trustee

DOGGET FAMILY STADIUM
5250 Bayou Willow Parkway, Beaumont, TX 77705



SITE MAP

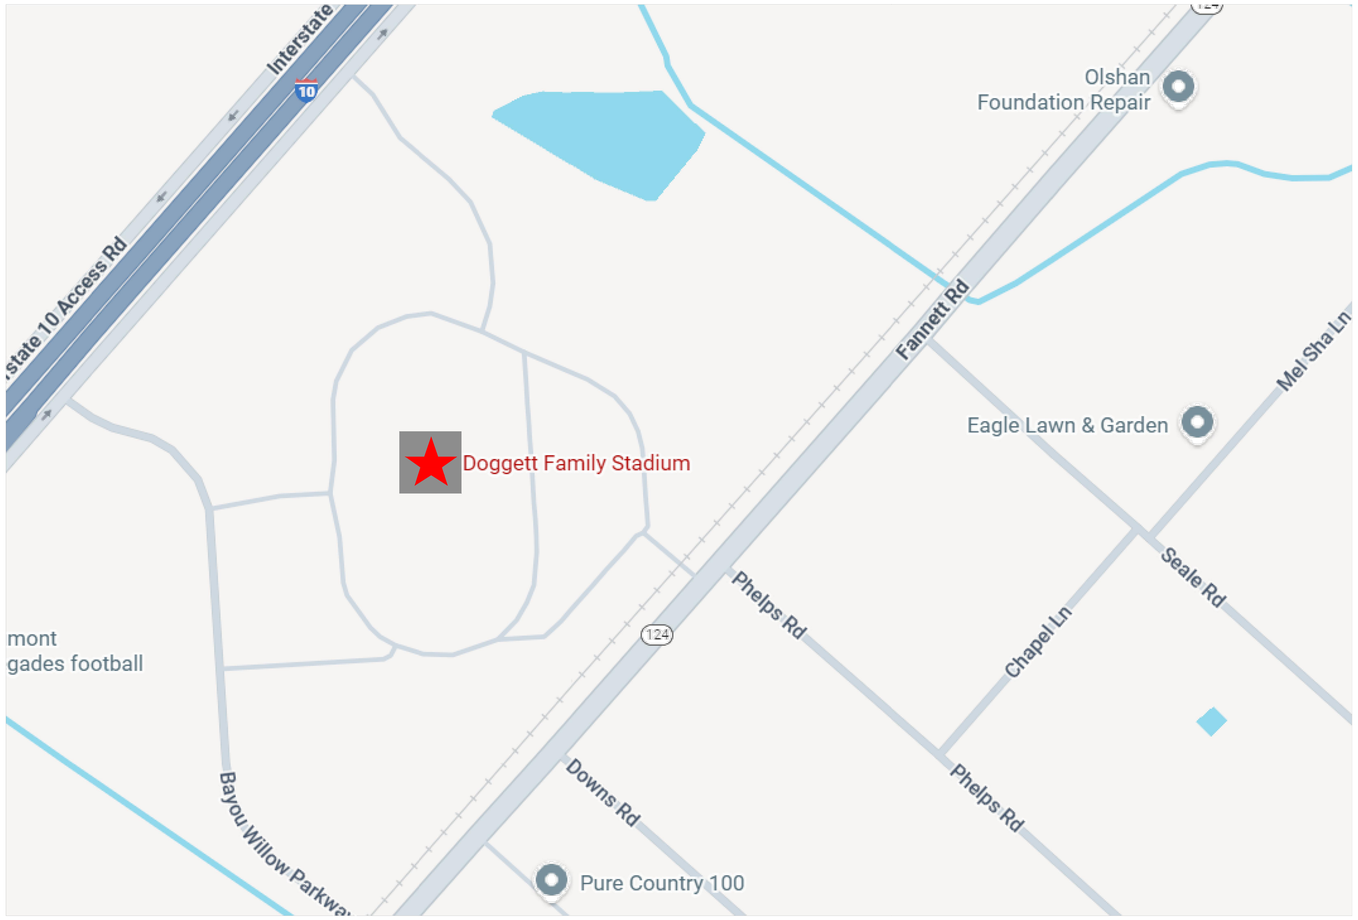

Beaumont ISD
Preparing Our Next Generation

LIST OF DRAWINGS:

CS-1 COVER SHEET - LIST OF DRAWINGS
E1.0 ELECTRICAL SITE PLAN
E2.0 ELECTRICAL DETAILS AND SCHEDULES

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
01-05-2026

ELECTRICAL GENERAL NOTES:

1. CALL 811 PRIOR TO COMMENCEMENT OF WORK, CONTACTOR SHALL HAVE ALL EXISTING UTILITIES MARKED FOR COORDINATION PURPOSES.

ELECTRICAL KEYED NOTES:

1. DISCONNECT AND REMOVE ALL ELECTRICAL TO EXISTING SCOREBOARD SYSTEM AND ASSOCIATED XFMR, DISCONNECT, ETC BACK TO SOURCE PANEL. PROVIDE NEW AS INDICATED. VERIFY ALL CONNECTIONS WITH SCOREBOARD MANUFACTURER.
2. INTERCEPT ALL EXISTING LOW VOLTAGE CONTROL AND VIDEO CONDUITS BELOW GRADE AND EXTEND TO NEW SCOREBOARD. PULL NEW CABLING AS REQUIRED AND MAKE ALL FINAL CONNECTIONS FROM SCOREBOARD TO PRESSBOX. (EXISTING: (2)1", (1)1-1/2")
3. PROVIDE NEW ELECTRICAL EQUIPMENT MOUNTED TO STEEL RACK, SCOREBOARD MANUFACTURER TO MAKE ALL FINAL SCOREBOARD CONNECTIONS FROM SCOREBOARD TO NEW PANEL LSB. REFER TO SCOREBOARD MANUFACTURER FOR ADDITIONAL INFORMATION.



N

1 ELECTRICAL SITE PLAN
SCALE: 1" = 50'-0"

Salas O'Brien

salasobrien.com 281-664-1900

HOUSTON TX
10930 W. SAM HOUSTON PKWY
NORTH SUITE 900
HOUSTON, TX 77064
Registration: F-4111
Project No.: 2450-70695-00

CONFIDENTIAL
THIS DRAWING AND ASSOCIATED DESIGN ELEMENTS ARE CONFIDENTIAL AND THE PROPERTY OF SALAS O'BRIEN, WHICH RETAINS ALL COMMON LAW, COPYRIGHT, STATUTORY AND OTHER RIGHTS THERETO. ANY UNAUTHORIZED USE, REUSE OR REPRODUCTION IS PROHIBITED WITHOUT EXPRESS WRITTEN AGREEMENT BY SALAS O'BRIEN. THIS DRAWING (OR ANY COPIES) SHALL BE RETURNED TO SALAS O'BRIEN UPON REQUEST.

PROFESSIONAL SEAL

BRADLEY KALMANS
80219
LICENSED
PROFESSIONAL ENGINEER
STATE OF TEXAS

01/05/2026

ISSUE DATE	DESCRIPTION
01/05/2026	ISSUE FOR PERMIT

BEAUMONT ISD STADIUM SCORE BOARD ELEC

Building Name/Location

NOTES

KEY PLAN

REVISIONS

Δ	DESCRIPTION	DATE

CHECKED BY AP
DRAWN BY DES

SHEET NAME

ELECTRICAL SITE PLAN


Salas O'Brien
HOUSTON
10930 W. SAM HOUSTON PKWY NORTH SUITE 900
HOUSTON, TX 77064
Salas O'Brien Registration: F-4111
Salas O'Brien Project Number: 2550-02337-00

SHEET NUMBER E1.0


REVISION

File Path

01 January, 2000




3 **TRANSFORMER GROUNDING DETAIL**
SCALE: NONE



NOTES:

1. PROVIDE, LOCATE AND INSTALL SURGE PROTECTION DEVICE AS REQUIRED PER SPECIFICATIONS.
2. REFER TO PANEL SCHEDULES AND ONE-LINE DIAGRAM FOR QUANTITY, TYPE, BREAKER SIZE, & WIRE SIZE.

3 **SURGE PROTECTION DETAIL**
SCALE: NONE



3 **EQUIPMENT STEEL RACK DETAIL**
SCALE: NONE

PANEL 'LSB' — 120/208V.,3PH.,4W. — 400 AMP MCB — MOUNTING: SURFACE — NEMA-4XSS — 22 K ISCA
LOCATION: SCOREBOARD RACK

CKT	LOAD	KVA	WIRE	BKR		BKR	WIRE	KVA	LOAD	CKT
1	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	#12	1.5	SCOREBOARD VIDEO	2
3	- - - -	1.5	#12	-		-	#12	1.5	- - - -	4
5	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	#12	1.5	SCOREBOARD VIDEO	6
7	- - - -	1.5	#12	-		-	#12	1.5	- - - -	8
9	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	#12	1.2	SCOREBOARD VIDEO	10
11	- - - -	1.5	#12	-		-	#12	1.2	- - - -	12
13	SCOREBOARD VIDEO	1.2	#12	20/2		20/2	#12	1.5	SCOREBOARD VIDEO	14
15	- - - -	1.2	#12	-		-	#12	1.5	- - - -	16
17	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	#12	1.5	SCOREBOARD VIDEO	18
19	- - - -	1.5	#12	-		-	#12	1.5	- - - -	20
21	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	#12	1.5	SCOREBOARD VIDEO	22
23	- - - -	1.5	#12	-		-	#12	1.5	- - - -	24
25	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	#12	1.2	SCOREBOARD VIDEO	26
27	- - - -	1.5	#12	-		-	#12	1.2	- - - -	28
29	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	#12	1.5	SCOREBOARD VIDEO	30
31	- - - -	1.5	#12	-		-	#12	1.5	- - - -	32
33	SCOREBOARD VIDEO	1.2	#12	20/2		20/2	#12	1.5	SCOREBOARD VIDEO	34
35	- - - -	1.2	#12	-		-	#12	1.5	- - - -	36
37	SPACE					30/3	#10	-	SPDL	38
39	SPACE					-	#10	-	- - - -	40
41	SPACE					-	#10	-	- - - -	42

TOTAL - SEE SECTION 3

(SECTION-2)

PANEL 'LSB' — 120/208V.,3PH.,4W. — 400 AMP MLO — MOUNTING: SURFACE — NEMA-4XSS — 22 K ISCA
LOCATION: SCOREBOARD RACK

CKT	LOAD	KVA	WIRE	BKR		BKR	WIRE	KVA	LOAD	CKT
43	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	#12	1.2	SCOREBOARD VIDEO	44
45	- - - -	1.5	#12	-		-	#12	1.2	- - - -	46
47	SCOREBOARD VIDEO	1.2	#12	20/2		20/2	#12	1.5	SCOREBOARD VIDEO	48
49	- - - -	1.2	#12	-		-	#12	1.5	- - - -	50
51	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	#12	1.5	SCOREBOARD VIDEO	52
53	- - - -	1.5	#12	-		-	#12	1.5	- - - -	54
55	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	#12	1.5	SCOREBOARD VIDEO	56
57	- - - -	1.5	#12	-		-	#12	1.5	- - - -	58
59	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	#12	1.2	SCOREBOARD VIDEO	60
61	- - - -	1.5	#12	-		-	#12	1.2	- - - -	62
63	SCOREBOARD VIDEO	1.2	#12	20/2		20/2	#12	1.5	SCOREBOARD VIDEO	64
65	- - - -	1.2	#12	-		-	#12	1.5	- - - -	66
67	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	#12	1.2	SCOREBOARD VIDEO	68
69	- - - -	1.5	#12	-		-	#12	1.2	- - - -	70
71	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	#12	1.5	SCOREBOARD VIDEO	72
73	- - - -	1.5	#12	-		-	#12	1.5	- - - -	74
75	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	#12	1.5	SCOREBOARD VIDEO	76
77	- - - -	1.5	#12	-		-	#12	1.5	- - - -	78
79	SPACE								SPACE	80
81	SPACE								SPACE	82
83	SPACE								SPACE	84

TOTAL - SEE SECTION 3

(SECTION-3)

PANEL 'LSB' — 120/208V.,3PH.,4W. — 400 AMP MLO — MOUNTING: SURFACE — NEMA-4XSS — 22 K ISCA
LOCATION: SCOREBOARD RACK


CKT	LOAD	KVA	WIRE	BKR		BKR	WIRE	KVA	LOAD	CKT
43	SCOREBOARD VIDEO	1.2	#12	20/2		20/1	-	-	SPARE	44
45	- - - -	1.2	#12	-		20/1	-	-	SPARE	46
47	SCOREBOARD VIDEO	1.5	#12	20/2		20/1	-	-	SPARE	48
49	- - - -	1.5	#12	-		20/1	-	-	SPARE	50
51	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	-	-	SPARE	52
53	- - - -	1.5	#12	-		-	-	-	- - - -	54
55	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	-	-	SPARE	56
57	- - - -	1.5	#12	-		-	-	-	- - - -	58
59	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	-	-	SPARE	60
61	- - - -	1.5	#12	-		-	-	-	- - - -	62
63	SCOREBOARD VIDEO	1.5	#12	20/2		20/2	-	-	SPARE	64
65	- - - -	1.5	#12	-		-	-	-	- - - -	66
67	SCOREBOARD VIDEO	1.5	#12	20/2					SPACE	68
69	- - - -	1.5	#12	-					SPACE	70
71	SCOREBOARD VIDEO	1.5	#12	20/2					SPACE	72
73	- - - -	1.5	#12	-					SPACE	74
75	SCOREBOARD VIDEO	1.2	#12	20/2					SPACE	76
77	- - - -	1.2	#12	-					SPACE	78
79	FIBER CONVERTER	0.1	#12	20/1					SPACE	80
81	SPACE								SPACE	82
83	SPACE								SPACE	84

CONTINUOUS (LTG.) LOAD x 1.25 = 0.0 KVA
MISC. LOAD x 1.0 = 102.7 KVA
TOTAL KVA = 102.7 KVA

SYMBOL SCHEDULE


SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
LIGHTING (LETTER DENOTES TYPE - SEE LIGHT FIXTURE SCHEDULE)	
	LED LIGHT FIXTURE - RECESSED, SURFACE, PENDANT
	LED LIGHT FIXTURE - RECESSED, SURFACE, PENDANT ON EMERGENCY CIRCUIT
	DOWNLIGHT FIXTURE
H	DOWNLIGHT FIXTURE ON EMERGENCY CIRCUIT
	LIGHT FIXTURE - WALL MOUNTED
H	LIGHT FIXTURE - WALL MOUNTED ON EMERGENCY CIRCUIT
	EXIT LIGHT-CEILING MTD WITH DIRECTIONAL ARROWS AS REQUIRED.
H	EXIT LIGHT-WALL MTD WITH DIRECTIONAL ARROWS AS REQUIRED
LIGHTING CONTROLS & DEVICES	
$	LINE VOLTAGE SINGLE POLE SWITCH
$3	LINE VOLTAGE 3-WAY SWITCH
$4	LINE VOLTAGE 4-WAY SWITCH
$K	LINE VOLTAGE MOMENTARY DPST KEYED SWITCH
$D	LINE VOLTAGE DIMMER SWITCH, SIZE AND TYPE AS REQUIRED
$T	6-HOUR ROTARY TIMER SWITCH WITH NO HOLD U.N.O.
	PUSH BUTTON EPO SWITCH WITH COVER
$MC	LOW VOLTAGE MOMENTARY CONTACT SWITCH
$R	LOW VOLTAGE DIGITAL KEYPAD
	OCCUPANCY SENSOR (AUTO ON / AUTO OFF WITHIN 20-MINUTES)
	VACANCY SENSOR (MANUAL ON / AUTO OFF WITHIN 20-MINUTES)
	PHOTOCELL SENSOR
R#	LIGHTING CONTROL SYSTEM. ('#' DENOTES TYPE - SEE LIGHTING CONTROLS SCHEDULE)
ER	EMERGENCY LOAD CONTROL RELAY. MINIMUM 16A AND 0-10V COMPATIBLE. PROVIDE U.L. 924 U.N.O.
RECEPTACLES AND OUTLETS	
	SIMPLEX RECEPTACLE
	DUPLEX RECEPTACLE
	125/250 VOLT, 1 PHASE, 3-WIRE, 20 AMPS UNLESS NOTED OTHERWISE
	DOUBLE DUPLEX IN 2-GANG BOX WITH SINGLE COVER PLATE
	DOUBLE DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE IN 2-GANG BOX WITH SINGLE COVER PLATE
	DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE
	CONCEALED SERVICE MULTI-ACCESS FLOOR BOX WITH DOUBLE DUPLEX RECEPTACLE AND DATA OUTLET. REFER TO TECHNOLOGY SERIES DRAWINGS FOR DATA CABLE QUANTIES.
	CONCEALED SERVICE MULTI-ACCESS FLOOR BOX WITH DOUBLE DUPLEX RECEPTACLE.
	JUNCTION BOX
	FLUSH FLOOR JUNCTION BOX
	FLUSH REMOTE GFCI DEVICE (LOCATE IN READILY ACCESSIBLE LOCATION)
C / C	'C' WHEN INDICATED NEXT TO ANY RECEPTACLE, INDICATES 'AUTOMATIC CONTROLLED RECEPTACLE'. PROVIDE 20-AMP MINIMUM PLUG-LOAD TYPE RECEPTACLE. SEE SPECIFICATIONS.
U / U	'U' WHEN INDICATED NEXT TO ANY RECEPTACLE, INDICATES 'RECEPACLE WITH USB CHARGING PORT'. PROVIDE 20-AMP MINIMUM USB TYPE RECEPTACLE. SEE SPECIFICATIONS.
MOTOR CONTROLLERS AND EQUIPMENT	
OR	MOTOR, MAKE FINAL MOTOR CONNECTION
$M	MOTOR-RATED SWITCH. 20A UNLESS INDICATED OTHERWISE.
J	DISCONNECT SWITCH AS REQUIRED
J	COMBINATION MOTOR STARTER/DISCONNECT SWITCH AS REQUIRED
	MOTOR STARTER
	PREWIRED DEVICE, MAKE ELECTRICAL FINAL CONNECTIONS
VFD	VARIABLE FREQUENCY DRIVE MOTOR CONTROLLER FURNISHED BY MECHANICAL CONTRACTOR AND INSTALLED BY ELECTRICAL CONTRACTOR.
T	LOW VOLTAGE TRANSFORMER, SIZE AND TYPE AS REQUIRED.
Y	CHIME/BUZZER
SPD'X'	SURGE PROTECTION DEVICE. 'X' EXPOSURE TYPE. VH - VERY HIGH, H - HIGH, M - MEDIUM, L - LOW
ELECTRICAL EQUIPMENT	
	277/480 VOLT DISTRIBUTION OR PANELBOARD
	120/208 VOLT PANELBOARD
	DRY TYPE TRANSFORMER
	PLYWOOD TELEPHONE BACKBOARD
CIRCUITING	
	CONDUIT
	CONDUIT BELOW FLOOR, SLAB, OR GRADE
#/2	3/4"C. UNLESS OTHERWISE NOTED; LONG HATCH, NEUTRAL; SHORT HATCH, PHASE; LONG HATCH & HOOK, INSULATED GROUND. NO HATCHES INDICATES 2 CONDUCTORS. ARROW INDICATES HOMERUN.
	PARTIAL ELECTRICAL HOME RUN
SUBSCRIPTS AND ABBREVIATIONS	
WP	INDICATES "WEATHERPROOF"
NL	INDICATES "NIGHT LIGHT".
(KS)	INDICATES "KNEE SPACE". LOCATE WIRING DEVICE CENTERED WITHIN KNEESPACE
U.N.O.	INDICATES "UNLESS NOTED OTHERWISE"
•	NEXT TO ANY SYMBOL INDICATES FINAL ROUGH-IN FIELD COORDINATION BY CONTRACTOR WITH ARCHITECTURAL MILLWORK DRAWINGS AND OTHER TRADES

NOTES:
-ALL EXTERIOR BUILDING ELECTRICAL EQUIPMENT TO BE WEATHERPROOF NEMA-3RX MINIMUM.
-ALL EXTERIOR RECEPTACLES SHALL BE WATER RESISTANT TYPE.

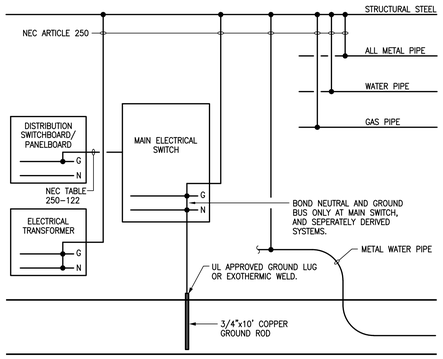

2 **TYPICAL GROUNDING DETAIL**
SCALE: NONE

-ALL CONDUCTORS AND GROUNDS ARE COPPER UNLESS NOTED OTHERWISE-

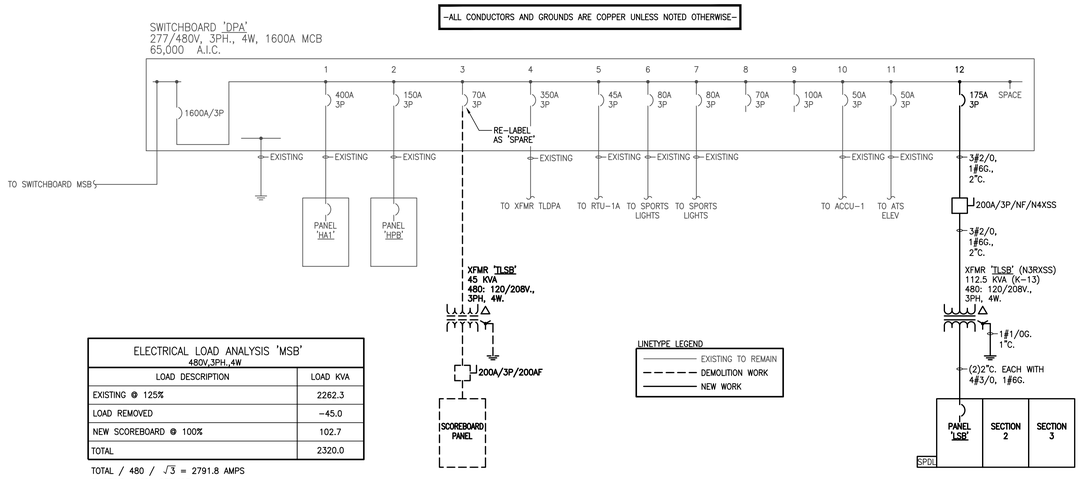

ELECTRICAL LOAD ANALYSIS 'MSB' 480V,3PH.,4W	
LOAD DESCRIPTION	LOAD KVA
EXISTING @ 125%	2262.3
LOAD REMOVED	-45.0
NEW SCOREBOARD @ 100%	102.7
TOTAL	2320.0

TOTAL / 480 / $\sqrt{3}$ = 2791.8 AMPS
EXISTING 3000A SERVICE

LINETYPE LEGEND
EXISTING TO REMAIN
DEMOLITION WORK
NEW WORK

1 **PARTIAL ONE-LINE DIAGRAM**
SCALE: NONE

ELECTRICAL GENERAL NOTES:

1. ALL EMPTY CONDUIT SHALL HAVE PULL STRING.
2. EACH CONDUIT SHALL BE LIMITED TO (3) CIRCUITS MAXIMUM.
3. NO MORE THAN THREE SINGLE PHASE CIRCUITS AND NO MORE THAN SIX CURRENT CARRYING CONDUCTORS SHALL BE INSTALLED IN A SINGLE RACEWAY. WHEN FOUR, FIVE, OR SIX CURRENT CARRYING CONDUCTORS ARE INSTALLED IN A SINGLE RACEWAY, THEIR CURRENT CARRYING AMPACITIES SHALL BE DERATED AS REQUIRED BY THE NEC FOR NON-DIVERSIFIED LOADS. THE INSTALLED WIRE SIZE SHALL HAVE A NOMINAL AMPACITY RATING OF 125% OF THAT REQUIRED OR SPECIFIED WHEN FOUR OR MORE CURRENT CARRYING CONDUCTORS ARE INSTALLED IN A SINGLE RACEWAY. NEUTRAL CONDUCTORS SHALL BE CONSIDERED A CURRENT CARRYING CONDUCTOR IN ALL NON-LINEAR LOADED CIRCUITS AS REQUIRED BY THE NEC.

Salas O'Brien
salasobrien.com 281-664-1900
HOUSTON TX
10930 W. SAM HOUSTON PKWY
NORTH SUITE 900
HOUSTON, TX 77064
Registration: F-4111
Project No.: 2450-70695-00

CONFIDENTIAL
THIS DRAWING AND ASSOCIATED DESIGN ELEMENTS ARE CONFIDENTIAL AND THE PROPERTY OF SALAS O'BRIEN, WHICH RETAINS ALL COMMON LAW COPYRIGHT, STATUTORY AND OTHER RIGHTS THERETO. ANY UNAUTHORIZED USE, REUSE OR REPRODUCTION IS PROHIBITED. UNLESS OTHERWISE AGREED TO BY SALAS O'BRIEN, THIS DRAWING (AS WELL AS ANY COPIES) SHALL BE RETURNED TO SALAS O'BRIEN UPON REQUEST.

PROFESSIONAL SEAL

BRADLEY KALMANS — 80219 — LICENSED PROFESSIONAL ENGINEER — STATE OF TEXAS

01/05/2026

ISSUE DATE	DESCRIPTION
01/05/2026	ISSUE FOR PERMIT

Building Name/Location

BEAUMONT ISD
STADIUM
SCORE BOARD
ELEC

NOTES

KEY PLAN

REVISIONS

Δ	DESCRIPTION	DATE

CHECKED BY AP — DRAWN BY DES

SHEET NAME

ELECTRICAL DETAILS & SCHEDULES

SHEET NUMBER E2.0 — REVISION

Salas O'Brien
HOUSTON
10930 W. SAM HOUSTON PKWY NORTH SUITE 900
HOUSTON, TX 77064
Salas O'Brien Registration: F-4111
Salas O'Brien Project Number: 2550-02337-00

File Path
01 January, 2000