



May 20, 2024

Ventura High School
c/o Ventura Unified School District
ATTN: Ray Richards, Bond Construction Project Manager
255 W. Stanley Avenue
Ventura, CA 93003
Via Email: Ray.Richards@venturausd.org

COMPREHENSIVE ASBESTOS SURVEY: 2 North Catalina Street, Ventura, CA 93001-Room #25

Dear Ray Richards,

Environmental Testing Associates (ETA) conducted bulk sampling for suspect asbestos containing materials (ACM) from building materials in the above referenced commercial building structure. The samples were delivered under proper chain of custody to an accredited laboratory for analysis. The objective of the investigation was to determine the possible presence of asbestos within the building materials identified below. No fire-related or structural damage was observed during this investigation.

1.0 SAMPLING FOR ASBESTOS AND PLM ANALYSIS RESULTS

ETA representative Mr. Kevin Riley, CAC 17-5871, NV-IJPM-1674 conducted the sampling activities. Mr. Riley is a State of California–DOSH-Certified Asbestos Consultant.

Sampling of suspect-ACM was conducted on May 16, 2024, following the provisions of 40 CFR Part 763-86. A total of 66 bulk samples were collected and delivered to LA Testing, an accredited laboratory NVLAP # 200232-0, located at 520 Mission Street, South Pasadena, California. (800-303-0047) Due to multiple layers a total of 87 suspect materials were analyzed by the laboratory.

Analysis of the bulk samples for asbestos was performed per Appendix A, Subpart F, 40 CFR Part 763, Section 1, Polarized Light Microscopy, by LA Testing which is accredited by the National Voluntary Laboratory Accreditation Program for asbestos analysis of bulk samples using polarized light microscopy.

Table 1.1 – Summary Bulk Samples Collected for Asbestos (Collected: 05/16/2024)

Based on the analytical results (above) 1% or greater of **asbestos was detected** in the samples collected as listed in the locations as shown below. The removal of these materials tested is regulated as ACM in the State of California.

Based on the analytical results <1% Chrysotile asbestos was detected in the samples collected listed below. The materials tested are regulated as Asbestos Containing Construction Materials (ACCM). The removal of the tested materials must be conducted by a California licensed asbestos abatement contractor. Proper Personal Protective Equipment (PPE) as per OSHA/CALOSHA must be worn during the removal process. Following the safe removal, the materials may be disposed of as general construction debris at a site that accepts asbestos waste.

Sample ID No.	Sample Description	Asbestos Mineral Type & Percent
A-1	Fiber Board Brown, Fibrous, Homogeneous	Walls No Asbestos Detected
A-2	Fiber Board Brown/White, Fibrous, Heterogeneous	Walls No Asbestos Detected
A-3	Fiber Board Brown/White, Fibrous, Heterogeneous	Walls No Asbestos Detected
A-4	Fiber Board Brown/White, Fibrous, Heterogeneous	Walls No Asbestos Detected
A-5	Fiber Board Brown/White, Fibrous, Heterogeneous	Walls No Asbestos Detected
A-6	Fiber Board Brown/White, Fibrous, Heterogeneous	Walls No Asbestos Detected
A-7	Fiber Board Brown/White, Fibrous, Heterogeneous	Walls No Asbestos Detected
A-8 Linoleum	Linoleum Floor with Mastic Black/Beige, Fibrous, Heterogeneous	Floor No Asbestos Detected
A-8a Mastic	Linoleum Floor with Mastic Brown/Red, Non-Fibrous, Homogeneous	Floor No Asbestos Detected
A-9 Linoleum	Linoleum Floor with Mastic Black/Beige, Fibrous, Heterogeneous	Floor No Asbestos Detected

A-9a Mastic	Linoleum Floor with Mastic Brown/Red, Non-Fibrous, Homogeneous	Floor	No Asbestos Detected
A-10 Linoleum	Linoleum Floor with Mastic Black/Beige, Fibrous, Heterogeneous	Floor	No Asbestos Detected
A-10a Mastic	Linoleum Floor with Mastic Brown/Red, Non-Fibrous, Homogeneous	Floor	No Asbestos Detected
A-11 Linoleum	Linoleum Floor with Mastic Black/Beige, Fibrous, Heterogeneous	Floor	No Asbestos Detected
A-11a Mastic	Linoleum Floor with Mastic Brown/Red, Non-Fibrous, Homogeneous	Floor	No Asbestos Detected
A-12 Linoleum	Linoleum Floor with Mastic Black/Beige, Fibrous, Heterogeneous	Floor	No Asbestos Detected
A-12a Mastic	Linoleum Floor with Mastic Brown/Red, Non-Fibrous, Homogeneous	Floor	No Asbestos Detected
A-13 Linoleum	Linoleum Floor with Mastic Black/Beige, Fibrous, Heterogeneous	Floor	No Asbestos Detected
A-13a Mastic	Linoleum Floor with Mastic Brown/Red, Non-Fibrous, Homogeneous	Floor	No Asbestos Detected
A-14 Linoleum	Linoleum Floor with Mastic Black/Beige, Fibrous, Heterogeneous	Floor	No Asbestos Detected
A-14a Mastic	Linoleum Floor with Mastic Red/Beige, Non-Fibrous, Homogeneous	Floor	No Asbestos Detected

A-15	Insulation Gray, Fibrous, Homogeneous	Ceiling Cavity	No Asbestos Detected
A-16	Insulation Gray, Fibrous, Homogeneous	Ceiling Cavity	No Asbestos Detected
A-17	Insulation Gray, Fibrous, Homogeneous	Ceiling Cavity	No Asbestos Detected
A-18	Insulation Gray, Fibrous, Homogeneous	Ceiling Cavity	No Asbestos Detected
A-19	Insulation Gray, Fibrous, Homogeneous	Ceiling Cavity	No Asbestos Detected
A-20	Insulation Gray, Fibrous, Homogeneous	Ceiling Cavity	No Asbestos Detected
A-21	Insulation Gray, Fibrous, Homogeneous	Ceiling Cavity	No Asbestos Detected
A-22	Ceiling Tiles Brown/White, Fibrous, Heterogeneous	Ceiling	No Asbestos Detected
A-23	Ceiling Tiles Brown/White, Fibrous, Heterogeneous	Ceiling	No Asbestos Detected
A-24	Ceiling Tiles Brown/White, Fibrous, Heterogeneous	Ceiling	No Asbestos Detected
A-25	Ceiling Tiles Brown/White, Fibrous, Homogeneous	Ceiling	No Asbestos Detected

A-26	Ceiling Tiles Brown/White, Fibrous, Heterogeneous	Ceiling	No Asbestos Detected
A-27	Ceiling Tiles Brown/White, Fibrous, Heterogeneous	Ceiling	No Asbestos Detected
A-28	Ceiling Tiles Brown/White, Fibrous, Heterogeneous	Ceiling	No Asbestos Detected
A-29 Finish Coat	Stucco System White/Beige, Non-Fibrous, Homogeneous	Exterior (East)	<1% Chrysotile Asbestos Detected
A-29a Base Coat	Stucco System Gray, Non-Fibrous, Homogeneous	Exterior (East)	No Asbestos Detected
A-30 Finish Coat	Stucco System White/Beige, Non-Fibrous, Homogeneous	Exterior (East)	<1% Chrysotile Asbestos Detected
A-30a Base Coat	Stucco System Gray, Non-Fibrous, Homogeneous	Exterior (East)	No Asbestos Detected
A-31 Finish Coat	Stucco System White/Beige, Non-Fibrous, Homogeneous	Exterior (West)	<1% Chrysotile Asbestos Detected
A-31a Base Coat	Stucco System Gray, Non-Fibrous, Homogeneous	Exterior (West)	No Asbestos Detected
A-32 Finish Coat	Stucco System White/Beige, Non-Fibrous, Homogeneous	Exterior (West)	<1% Chrysotile Asbestos Detected
A-32a Base Coat	Stucco System Gray, Non-Fibrous, Homogeneous	Exterior (West)	No Asbestos Detected

A-33 Finish Coat	Stucco System White/Beige, Non-Fibrous, Homogeneous	Exterior (North)	<1% Chrysotile Asbestos Detected
A-33a Base Coat	Stucco System Gray, Non-Fibrous, Homogeneous	Exterior (North)	No Asbestos Detected
A-34 Finish Coat	Stucco System White/Beige, Non-Fibrous, Homogeneous	Exterior (North)	<1% Chrysotile Asbestos Detected
A-34a Base Coat	Stucco System Gray, Non-Fibrous, Homogeneous	Exterior (North)	No Asbestos Detected
A-35 Finish Coat	Stucco System White/Beige, Non-Fibrous, Homogeneous	Exterior (South)	<1% Chrysotile Asbestos Detected
A-35a Base Coat	Stucco System Gray, Non-Fibrous, Homogeneous	Exterior (South)	No Asbestos Detected
A-36 Tar Mastic Like	Asphalt Black, Non-Fibrous, Homogeneous	Exterior (See Map)	No Asbestos Detected
A-37 Tar Mastic Like	Asphalt Black, Non-Fibrous, Homogeneous	Exterior (See Map)	No Asbestos Detected
A-38 Tar Mastic Like	Asphalt Black, Non-Fibrous, Homogeneous	Exterior (See Map)	No Asbestos Detected
A-39 Tar Mastic Like	Asphalt Black, Non-Fibrous, Homogeneous	Exterior (See Map)	No Asbestos Detected
A-40 Tar Mastic Like	Asphalt Black, Non-Fibrous, Homogeneous	Exterior (See Map)	No Asbestos Detected

A-41 Tar Mastic Like	Asphalt Black, Non-Fibrous, Homogeneous	Exterior (See Map)	No Asbestos Detected
A-42 Tar Mastic Like	Asphalt Black, Non-Fibrous, Homogeneous	Exterior (See Map)	No Asbestos Detected
A-43	Concrete Gray, Non-Fibrous, Homogeneous	Exterior (Stairs)	No Asbestos Detected
A-44	Concrete Gray, Non-Fibrous, Homogeneous	Exterior (Stairs)	No Asbestos Detected
A-45	Concrete Gray, Non-Fibrous, Homogeneous	Exterior (Stairs)	No Asbestos Detected
A-46	Concrete Gray, Non-Fibrous, Homogeneous	Exterior (Stairs)	No Asbestos Detected
A-47	Concrete Gray, Non-Fibrous, Homogeneous	Exterior (Stairs)	No Asbestos Detected
A-48	Concrete Gray, Non-Fibrous, Homogeneous	Exterior (Stairs)	No Asbestos Detected
A-49	Concrete Gray, Non-Fibrous, Homogeneous	Exterior (Stairs)	No Asbestos Detected
A-50	Window Putty White, Non-Fibrous, Homogeneous	Exterior	<1% Chrysotile Asbestos Detected
A-51	Window Putty White, Non-Fibrous, Homogeneous	Exterior	<1% Chrysotile Asbestos Detected

A-52	Window Putty White, Non-Fibrous, Homogeneous	Exterior	<1% Chrysotile Asbestos Detected
A-53	Window Putty White, Non-Fibrous, Homogeneous	Exterior	<1% Chrysotile Asbestos Detected
A-54	Window Putty White, Non-Fibrous, Homogeneous	Exterior	<1% Chrysotile Asbestos Detected
A-55	Window Putty White, Non-Fibrous, Homogeneous	Exterior	<1% Chrysotile Asbestos Detected
A-56	Window Putty White, Non-Fibrous, Homogeneous	Exterior	<1% Chrysotile Asbestos Detected
A-57 Roofing Mastic Like	Roofing Materials Black, Non-Fibrous, Homogeneous	Roof	10% Chrysotile Asbestos Detected
A-57a Asphalt	Roofing Materials Gray/Black, Non-Fibrous, Homogeneous	Roof	No Asbestos Detected
A-58 Roofing Mastic Like	Roofing Materials Black, Non-Fibrous, Homogeneous	Roof	10% Chrysotile Asbestos Detected
A-58a Asphalt	Roofing Materials Black, Non-Fibrous, Homogeneous	Roof	No Asbestos Detected
A-59 Roofing Mastic Like	Roofing Materials Black, Non-Fibrous, Homogeneous	Roof	10% Chrysotile Asbestos Detected
A-59a Asphalt	Roofing Materials Black, Non-Fibrous, Homogeneous	Roof	No Asbestos Detected

A-60 Roofing Mastic Like	Roofing Materials Black, Non-Fibrous, Homogeneous	Roof	10% Chrysotile Asbestos Detected
A-60a Asphalt	Roofing Materials Black, Non-Fibrous, Homogeneous	Roof	No Asbestos Detected
A-61 Roofing Mastic Like	Roofing Materials Black, Non-Fibrous, Homogeneous	Roof	10% Chrysotile Asbestos Detected
A-61a Asphalt	Roofing Materials Gray/Black, Non-Fibrous, Homogeneous	Roof	No Asbestos Detected
A-63 Roofing Mastic Like	Roofing Materials Black, Non-Fibrous, Homogeneous	Roof	10% Chrysotile Asbestos Detected
A-63a Asphalt	Roofing Materials Gray/Black, Non-Fibrous, Homogeneous	Roof	No Asbestos Detected
A-64	Penetration Mastic Black, Non-Fibrous, Homogeneous	Roof	No Asbestos Detected
A-65	Penetration Mastic Black, Non-Fibrous, Homogeneous	Roof	No Asbestos Detected
A-66	Penetration Mastic Black, Non-Fibrous, Homogeneous	Roof	No Asbestos Detected

See Attached "Polarized Microscopy Asbestos Analysis Report" and associated chain of custody document for additional detail regarding location of samples (Appendix A).

Based on the analytical results (above) 1% or greater of **asbestos was detected** in the samples collected as listed in the locations as shown above. The removal of these materials tested is regulated as ACM in the State of California.


Based on the analytical results <1% Chrysotile asbestos was detected in the samples collected listed above. The materials tested are regulated as Asbestos Containing Construction Materials (ACCM). The removal of the tested materials must be conducted by a California licensed asbestos abatement contractor. Proper Personal Protective Equipment (PPE) as per OSHA/CALOSHA must be worn during the removal process. Following the safe removal, the materials may be disposed of as general construction debris at a site that accepts asbestos waste.

2.0 RECOMMENDATIONS

Due to the findings, removal of these items is required to be performed by a California-licensed and registered asbestos abatement contractor. This report should be kept as part of the permanent archive of the subject property. If you have any questions or comments concerning this information or this report, please contact our office.

Yours very truly,

ENVIRONMENTAL TESTING ASSOCIATES,



Kevin R. Riley
CAC 17-5871, NV-IJPM-1674
NIOSH 582 Certification # 120400LA-06

Attachments: Laboratory analytical results data sheet.

APPENDIX A

ANALYTICAL DATA



LA Testing

520 Mission Street South Pasadena, CA 91030

Tel/Fax: (323) 254-9960 / (323) 254-9982

<http://www.LATesting.com> / pasadenalab@latesting.com

LA Testing Order: 322412545

Customer ID: 32ETAS62

Customer PO:

Project ID:

Attention: Kevin Riley
Environmental Testing Associates
850 Hampshire Rd
Suite G
Westlake Village, CA 91361

Phone:
Fax: (805) 497-7377

Received Date: 05/16/2024 3:10 PM

Analysis Date: 05/17/2024

Collected Date:

Project: Ventura High School c/o Ventura Unified School District 2 North Catalina Street, Ventura, CA 93001

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
A1 322412545-0001	Fiber board	Brown Fibrous Homogeneous	98% Cellulose	2% Non-fibrous (Other)	None Detected
A2 322412545-0002	Fiber board	Brown/White Fibrous Heterogeneous	90% Cellulose	10% Non-fibrous (Other)	None Detected
A3 322412545-0003	Fiber board	Brown/White Fibrous Heterogeneous	90% Cellulose	10% Non-fibrous (Other)	None Detected
A4 322412545-0004	Fiber board	Brown/White Fibrous Heterogeneous	90% Cellulose	10% Non-fibrous (Other)	None Detected
A5 322412545-0005	Fiber board	Brown/White Fibrous Heterogeneous	90% Cellulose	10% Non-fibrous (Other)	None Detected
A6 322412545-0006	Fiber board	Brown/White Fibrous Heterogeneous	9% Cellulose	91% Non-fibrous (Other)	None Detected
A7 322412545-0007	Fiber board	Brown/White Fibrous Heterogeneous	90% Cellulose	10% Non-fibrous (Other)	None Detected
A8-Linoleum 322412545-0008	Linoleum fl w/ mastic	Black/Beige Fibrous Heterogeneous	20% Cellulose	80% Non-fibrous (Other)	None Detected
A8-Mastic 322412545-0008A	Linoleum fl w/ mastic	Brown/Red Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A9-Linoleum 322412545-0009	Linoleum fl w/ mastic	Black/Beige Fibrous Heterogeneous	20% Cellulose	80% Non-fibrous (Other)	None Detected
A9-Mastic 322412545-0009A	Linoleum fl w/ mastic	Brown/Red Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A10-Linoleum 322412545-0010	Linoleum fl w/ mastic	Black/Beige Fibrous Heterogeneous	20% Cellulose	80% Non-fibrous (Other)	None Detected
A10-Mastic 322412545-0010A	Linoleum fl w/ mastic	Brown/Red Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A11-Linoleum 322412545-0011	Linoleum fl w/ mastic	Black/Beige Fibrous Heterogeneous	20% Cellulose	80% Non-fibrous (Other)	None Detected
A11-Mastic 322412545-0011A	Linoleum fl w/ mastic	Brown/Red Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A12-Linoleum 322412545-0012	Linoleum fl w/ mastic	Black/Beige Fibrous Heterogeneous	20% Cellulose	80% Non-fibrous (Other)	None Detected

Initial report from: 05/17/2024 10:29:03



LA Testing

520 Mission Street South Pasadena, CA 91030

Tel/Fax: (323) 254-9960 / (323) 254-9982

<http://www.LATesting.com> / pasadenalab@latesting.com

LA Testing Order: 322412545

Customer ID: 32ETAS62

Customer PO:

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
A12-Mastic 322412545-0012A	Linoleum fl w/ mastic	Brown/Red Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A13-Linoleum 322412545-0013	Linoleum fl w/ mastic	Black/Beige Fibrous Heterogeneous	20% Cellulose	80% Non-fibrous (Other)	None Detected
A13-Mastic 322412545-0013A	Linoleum fl w/ mastic	Brown/Red Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A14-Linoleum 322412545-0014	Linoleum fl w/ mastic	Black/Beige Fibrous Heterogeneous	20% Cellulose	80% Non-fibrous (Other)	None Detected
A14-Mastic 322412545-0014A	Linoleum fl w/ mastic	Red/Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A15 322412545-0015	Insulation	Gray Fibrous Homogeneous	98% Min. Wool	2% Non-fibrous (Other)	None Detected
A16 322412545-0016	Insulation	Gray Fibrous Homogeneous	98% Min. Wool	2% Non-fibrous (Other)	None Detected
A17 322412545-0017	Insulation	Gray Fibrous Homogeneous	98% Min. Wool	2% Non-fibrous (Other)	None Detected
A18 322412545-0018	Insulation	Gray Fibrous Homogeneous	98% Min. Wool	2% Non-fibrous (Other)	None Detected
A19 322412545-0019	Insulation	Gray Fibrous Homogeneous	98% Glass	2% Non-fibrous (Other)	None Detected
A20 322412545-0020	Insulation	Gray Fibrous Homogeneous	98% Glass	2% Non-fibrous (Other)	None Detected
A21 322412545-0021	Insulation	Gray Fibrous Homogeneous	98% Glass	2% Non-fibrous (Other)	None Detected
A22 322412545-0022	Ceiling tiles	Brown/White Fibrous Heterogeneous	90% Cellulose	10% Non-fibrous (Other)	None Detected
A23 322412545-0023	Ceiling tiles	Brown/White Fibrous Heterogeneous	90% Cellulose	10% Non-fibrous (Other)	None Detected
A24 322412545-0024	Ceiling tiles	Brown/White Fibrous Heterogeneous	90% Cellulose	10% Non-fibrous (Other)	None Detected
A25 322412545-0025	Ceiling tiles	Brown/White Fibrous Homogeneous	90% Cellulose	10% Non-fibrous (Other)	None Detected
A26 322412545-0026	Ceiling tiles	Brown/White Fibrous Heterogeneous	90% Cellulose	10% Non-fibrous (Other)	None Detected
A27 322412545-0027	Ceiling tiles	Brown/White Fibrous Heterogeneous	90% Cellulose	10% Non-fibrous (Other)	None Detected
A28 322412545-0028	Ceiling tiles	Brown/White Fibrous Heterogeneous	90% Cellulose	10% Non-fibrous (Other)	None Detected

Initial report from: 05/17/2024 10:29:03



LA Testing

520 Mission Street South Pasadena, CA 91030

Tel/Fax: (323) 254-9960 / (323) 254-9982

<http://www.LATesting.com> / pasadenalab@latesting.com

LA Testing Order: 322412545

Customer ID: 32ETAS62

Customer PO:

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
A29-Finish Coat 322412545-0029	Stucco system	White/Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	<1% Chrysotile
A29-Base Coat 322412545-0029A	Stucco system	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A30-Finish Coat 322412545-0030	Stucco system	White/Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	<1% Chrysotile
A30-Base Coat 322412545-0030A	Stucco system	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A31-Finish Coat 322412545-0031	Stucco system	White/Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	<1% Chrysotile
A31-Base Coat 322412545-0031A	Stucco system	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A32-Finish Coat 322412545-0032	Stucco system	White/Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	<1% Chrysotile
A32-Base Coat 322412545-0032A	Stucco system	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A33-Finish Coat 322412545-0033	Stucco system	White/Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	<1% Chrysotile
A33-Base Coat 322412545-0033A	Stucco system	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A34-Finish Coat 322412545-0034	Stucco system	White/Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	<1% Chrysotile
A34-Base Coat 322412545-0034A	Stucco system	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A35-Finish Coat 322412545-0035	Stucco system	White/Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	<1% Chrysotile
A35-Base Coat 322412545-0035A	Stucco system	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A36-Tar Mastic Like 322412545-0036 No asphalt present for analysis	Asphalt	Black Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
A37-Tar Mastic Like 322412545-0037 No asphalt present for analysis	Asphalt	Black Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
A38-Tar Mastic Like 322412545-0038 No asphalt present for analysis	Asphalt	Black Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
A39-Tar Mastic Like 322412545-0039 No asphalt present for analysis	Asphalt	Black Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected

Initial report from: 05/17/2024 10:29:03



LA Testing

520 Mission Street South Pasadena, CA 91030

Tel/Fax: (323) 254-9960 / (323) 254-9982

<http://www.LATesting.com> / pasadenalab@latesting.com

LA Testing Order: 322412545

Customer ID: 32ETAS62

Customer PO:

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
A40-Tar Mastic Like 322412545-0040 No asphalt present for analysis	Asphalt	Black Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
A41-Tar Mastic Like 322412545-0041 No asphalt present for analysis	Asphalt	Black Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
A42-Tar Mastic Like 322412545-0042 No asphalt present for analysis	Asphalt	Black Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
A43 322412545-0043	Concrete	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A44 322412545-0044	Concrete	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A45 322412545-0045	Concrete	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A46 322412545-0046	Concrete	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A47 322412545-0047	Concrete	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A48 322412545-0048	Concrete	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A49 322412545-0049	Concrete	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A50 322412545-0050	Window putty	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	<1% Chrysotile
A51 322412545-0051	Window putty	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	<1% Chrysotile
A52 322412545-0052	Window putty	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	<1% Chrysotile
A53 322412545-0053	Window putty	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	<1% Chrysotile
A54 322412545-0054	Window putty	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	<1% Chrysotile
A55 322412545-0055	Window putty	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	<1% Chrysotile
A56 322412545-0056	Window putty	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	<1% Chrysotile
A57-Roofing Mastic Like 322412545-0057	Roofing materials	Black Non-Fibrous Homogeneous	2% Cellulose	88% Non-fibrous (Other)	10% Chrysotile

Initial report from: 05/17/2024 10:29:03



LA Testing

520 Mission Street South Pasadena, CA 91030

Tel/Fax: (323) 254-9960 / (323) 254-9982

<http://www.LATesting.com> / pasadenalab@latesting.com

LA Testing Order: 322412545

Customer ID: 32ETAS62

Customer PO:

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
A57-Asphalt 322412545-0057A	Roofing materials	Gray/Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A58-Roofing Mastic Like 322412545-0058	Roofing materials	Black Non-Fibrous Homogeneous		90% Non-fibrous (Other)	10% Chrysotile
A58-Asphalt 322412545-0058A	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A59-Roofing Mastic Like 322412545-0059	Roofing materials	Black Non-Fibrous Homogeneous		90% Non-fibrous (Other)	10% Chrysotile
A59-Asphalt 322412545-0059A	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A60-Roofing Mastic Like 322412545-0060	Roofing materials	Black Non-Fibrous Homogeneous		90% Non-fibrous (Other)	10% Chrysotile
A60-Asphalt 322412545-0060A	Roofing materials	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A61-Roofing Mastic Like 322412545-0061	Roofing materials	Black Non-Fibrous Homogeneous		90% Non-fibrous (Other)	10% Chrysotile
A61-Asphalt 322412545-0061A	Roofing materials	Gray/Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A62-Roofing Mastic Like 322412545-0062	Roofing materials	Black Non-Fibrous Homogeneous		90% Non-fibrous (Other)	10% Chrysotile
A62-Asphalt 322412545-0062A	Roofing materials	Gray/Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A63-Roofing Mastic Like 322412545-0063	Roofing materials	Black Non-Fibrous Homogeneous		90% Non-fibrous (Other)	10% Chrysotile
A63-Asphalt 322412545-0063A	Roofing materials	Gray/Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A64 322412545-0064	Penetration mastic	Black Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
A65 322412545-0065	Penetration mastic	Black Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
A66 322412545-0066	Penetration mastic	Black Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected



LA Testing

520 Mission Street South Pasadena, CA 91030

Tel/Fax: (323) 254-9960 / (323) 254-9982

<http://www.LATesting.com> / pasadenalab@latesting.com

LA Testing Order: 322412545

Customer ID: 32ETAS62

Customer PO:

Project ID:

Analyst(s)

Joel Paruli (37)

Rosa Mendoza (50)

Jerry Drapala Ph.D, Laboratory Manager
or Other Approved Signatory

LA Testing maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by LA Testing. LA Testing bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore LA Testing recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by LA Testing South Pasadena, CA NVLAP Lab Code 200232-0, CA ELAP 2283

Initial report from: 05/17/2024 10:29:03

#3 2 2 4 1 2 5 4 5

**Environmental**
Testing Associates**CHAIN OF CUSTODY**

L.A. TESTING (NVLAP #200232-0)

520 Mission Street, South Pasadena, CA

Phone: 800.303.0047

Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361

Phone: 805.497.7499

Fax: 805.497.7477

Project Name: Ventura High School c/o Ventura Unified School District Inspector: Kevin Riley Date: 05/16/2024
Project Address: 2 North Catalina Street, Ventura, CA 93001 Building/Area: (25)
Client Name: Ray Richards, VUSD Contact # (805) 342-6464
Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A-1	FIBER BOARD	G/D/S D %L/D	75KLB	PLM	walls	NF
A2		G/D/S D %L/D		PLM		
A3		G/D/S D %L/D		PLM		
A4		G/D/S D %L/D		PLM		
A5		G/D/S D %L/D		PLM		
A6		G/D/S D %L/D		PLM		
A7		G/D/S D %L/D		PLM		

Relinquished by: [Signature] DATE: 5-16-24 TIME: 7:10 ☐ Sent Via FedEx ☒ Hand Delivered to Lab

Kevin Riley CAC-17-5871

Received by: [Signature] (JF)DATE: 5/16/24 TIME: 3:10 PM

Name (please print)

Requested Analysis Circle one:

6 Hour

Page 1 of 10

#322412545



CHAIN OF CUSTODY

L.A. TESTING (NVLAP #200232-0)
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361 Phone: 805.497.7499 Fax: 805.497.7477

Project Name: Ventura High School Unified School District Inspector: Kevin Riley Date: 05/16/2024
Project Address: 2 North Catalina Street, Ventura, CA 93001 Building/Area: (25)
Client Name: Ray Richards, VUSD Contact # (805) 342-6464
Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A8	LINO/EVRY PL W/MASTIC	G/D/S D %L/D	750	PLM	FL 0000	NF
A9		G/D/S D %L/D		PLM		
A10		G/D/S D %L/D		PLM		
A11		G/D/S D %L/D		PLM		
A12		G/D/S D %L/D		PLM		
A13		G/D/S D %L/D		PLM		
A14		G/D/S D %L/D		PLM		

Relinquished by: [Signature] DATE: 5-16-24 TIME: 4 ☐ Sent Via FedEx ☒ Hand Delivered to Lab
Received by: Ray Gwella (W1) DATE: 5/16/24 TIME: 3:10PM
Requested Analysis Circle one: 6 Hour Signature [Signature] Page 2 of 10

#322412545



CHAIN OF CUSTODY

L.A. TESTING (NVLAP #200232-0)
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361 Phone: 805.497.7499 Fax: 805.497.7477

Project Name: Ventura High School c/o Ventura Unified School District Inspector: Kevin Riley Date: 05/16/2024
Project Address: 2 North Catalina Street, Ventura, CA 93001 Building/Area: (25)
Client Name: Ray Richards, VUSD Contact # (805) 342-6464

Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A15	insulation	G/D/S D %L/D	2510.3	PLM	ceiling cavity	NE
A16		G/D/S D %L/D		PLM		
A17		G/D/S D %L/D		PLM		
A18		G/D/S D %L/D		PLM		
A19		G/D/S D %L/D		PLM		
A20		G/D/S D %L/D		PLM		
A21		G/D/S D %L/D		PLM		

Relinquished by: [Signature] DATE: 5-16-24 TIME: 4:10 PM ☐ Sent Via FedEx ☒ Hand Delivered to Lab
Received by: Kevin Riley CAC-17-5871 DATE: 5/16/24 TIME: 3:10 PM
Requested Analysis Circle one: 6 Hour Signature [Signature] Page 3 of 10

#322412545



CHAIN OF CUSTODY

L.A. TESTING (NVLAP #200232-0)
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361 Phone: 805.497.7499 Fax: 805.497.7477

Project Name: Ventura High School c/o Ventura Unified School District Inspector: Kevin Riley Date: 05/16/2024
Project Address: 2 North Catalina Street, Ventura, CA 93001 Building/Area: (25)
Client Name: Ray Richards, VUSD Contact # (805) 342-6464
Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A22	ceiling tiles	G/D/S D %L/D	75K	PLM	ceiling tiles	NK
A23		G/D/S D %L/D		PLM		
A24		G/D/S D %L/D		PLM		
A25		G/D/S D %L/D		PLM		
A26		G/D/S D %L/D		PLM		
A27		G/D/S D %L/D		PLM		
A28		G/D/S D %L/D		PLM		

Relinquished by: [Signature] DATE: 5-16-24 TIME: 4:10 ☐ Sent Via FedEx ☒ Hand Delivered to Lab

Received by: Ray Garcia (VUSD) DATE: 5/16/24 TIME: 3:10PM
Name (please print)

Requested Analysis Circle one:

Signature

6 Hour

Page 4 of 10

#322412545



CHAIN OF CUSTODY

L.A. TESTING (NVLAP #200232-0)
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361 Phone: 805.497.7499 Fax: 805.497.7477

Project Name: Ventura High School c/o Ventura Unified School District Inspector: Kevin Riley Date: 05/16/2024
Project Address: 2 North Catalina Street, Ventura, CA 93001 Building/Area: (25)
Client Name: Ray Richards, VUSD Contact # (805) 342-6464
Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A29	STUCCO SYSTEM	G/D/S D %L/D	25K D	PLM	Ext: E	NF
A30		G/D/S D %L/D		PLM	E	
A31		G/D/S D %L/D		PLM	N	
A32		G/D/S D %L/D		PLM	N	
A33		G/D/S D %L/D		PLM	N	
A34		G/D/S D %L/D		PLM	N	
A35		G/D/S D %L/D		PLM	S	

Relinquished by: Kevin Riley CAC-175871 DATE: 5-16-24 TIME: 7 ☐ Sent Via FedEx ☒ Hand Delivered to Lab
Received by: Ray Garcia (WTS) DATE: 5/16/24 TIME: 3:10PM
Requested Analysis Circle one: 6 Hour Signature: [Signature] Page 5 of 10

#322412545

CHAIN OF CUSTODY



L.A. TESTING (NVLP #200232-0)

520 Mission Street, South Pasadena, CA

Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361

Phone: 805.497.7499 Fax: 805.497.7477

Project Name: Ventura High School c/o Ventura Unified School District Inspector: Kevin Riley Date: 05/16/2024
Project Address: 2 North Catalina Street, Ventura, CA 93001 Building/Area: (25)
Client Name: Ray Richards, VUSD Contact # (805) 342-6464
Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A 35 36	Asphalt	G/D/S D %L/D	> 5L	PLM	Sur: 5L = NMP	NK
A 36 37		G/D/S D %L/D		PLM		
A 38		G/D/S D %L/D		PLM		
A 38 39		G/D/S D %L/D		PLM		
A 39 40		G/D/S D %L/D		PLM		
A 40		G/D/S D %L/D		PLM		
A 41		G/D/S D %L/D		PLM		
A 42		G/D/S D %L/D		PLM		

Relinquished by: [Signature] DATE: 5-16-24 TIME: 9:00 ☒ Sent Via FedEx ☒ Hand Delivered to Lab

Kevin Riley CAC-17-5871

Received by: Ray Garcia (WJ) DATE: 5/16/24 TIME: 3:10 PM

Name (please print)

Requested Analysis Circle one:

Signature

6 Hour

Page 6 of 10

#322412545

CHAIN OF CUSTODY



L.A. TESTING (NVLAP #200232-0)

520 Mission Street, South Pasadena, CA

Phone: 800.303.0047

Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361

Phone: 805.497.7499

Fax: 805.497.7477

Project Name: Ventura High School c/o Ventura Unified School District Inspector: Kevin Riley Date: 05/16/2024
Project Address: 2 North Catalina Street, Ventura, CA 93001 Building/Area: (25)
Client Name: Ray Richards, VUSD Contact # (805) 342-6464
Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A43	Concrete	G/p/s D %L/D		PLM	Exp. stains	NE
A44		G/p/s D %L/D		PLM		
A45		G/p/s D %L/D		PLM		
A46		G/p/s D %L/D		PLM		
A47		G/p/s D %L/D		PLM		
A48		G/p/s D %L/D		PLM		
A49		G/p/s D %L/D		PLM		

Relinquished by: [Signature] DATE: 5-16-24 TIME: 4:15 ☐ Sent Via FedEx ☒ Hand Delivered to Lab

Kevin Riley CAC-17-5871

Received by: Ray Richards (WJ)

Name (please print)

DATE: 5/16/24 TIME: 3:10PM

Requested Analysis Circle one:

Signature

6 Hour

Page 2 of 10

#322412545

CHAIN OF CUSTODY



L.A. TESTING (NVLAP #200232-0)

520 Mission Street, South Pasadena, CA

Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361

Phone: 805.497.7499 Fax: 805.497.7477

Project Name: Ventura High School c/o Ventura Unified School District Inspector: Kevin Riley Date: 05/16/2024
Project Address: 2 North Catalina Street, Ventura, CA 93001 Building/Area: 25
Client Name: Ray Richards, VUSD Contact # (805) 342-6464
Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A50	WINDSON PUTTY	G/D/S D %L/D	25x18	PLM	Ext	NF
A51		G/D/S D %L/D		PLM		
A52		G/D/S D %L/D		PLM		
A53		G/D/S D %L/D		PLM		
A54		G/D/S D %L/D		PLM		
A55		G/D/S D %L/D		PLM		
A56		G/D/S D %L/D		PLM		

Relinquished by: Kevin Riley CAC-17-5871 DATE: 5-16-24 TIME: 4p ☐ Sent Via FedEx ☒ Hand Delivered to LabReceived by: Ray Garcia (WJ) DATE: 5/16/24 TIME: 3:10PM

Name (please print)

Requested Analysis Circle one:

Signature

6 Hour

Page 8 of 10

#322412545



CHAIN OF CUSTODY

L.A. TESTING (NVLAP #200232-0)
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361 Phone: 805.497.7499 Fax: 805.497.7477

Project Name: Ventura High School c/o Ventura Unified School District Inspector: Kevin Riley Date: 05/16/2024
Project Address: 2 North Catalina Street, Ventura, CA 93001 Building/Area: (25)
Client Name: Ray Richards, VUSD Contact # (805) 342-6464
Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A57	Roofing materials	G/D/S D %L/D	5K B	PLM	Roofing	NH
A58		G/D/S D %L/D		PLM		
A59		G/D/S D %L/D		PLM		
A60		G/D/S D %L/D		PLM		
A61		G/D/S D %L/D		PLM		
A62		G/D/S D %L/D		PLM		
A63		G/D/S D %L/D		PLM		

Relinquished by: [Signature] DATE: 5-16-24 TIME: 4:15 ☐ Sent Via FedEx ☒ Hand Delivered to Lab
Received by: Kevin Riley CAC-17-5871 DATE: 5/16/24 TIME: 3:10 PM
Requested Analysis Circle one: 6 Hour Signature [Signature] Page 2 of 14

#322412545

CHAIN OF CUSTODY



L.A. TESTING (NVLAP #200232-0)
520 Mission Street, South Pasadena, CA
Phone: 800.303.0047 Fax: 323.254.9982

850 Hampshire Road Suite G, Westlake Village, CA 91361

Phone: 805.497.7499

Fax: 805.497.7477

Project Name: Ventura High School c/o Ventura Unified School District Inspector: Kevin Riley Date: 05/16/2024
Project Address: 2 North Catalina Street, Ventura, CA 93001 Building/Area: 25
Client Name: Ray Richards, VUSD Contact # (805) 342-6464
Email: KRiley@etatesting.com, JWeber@etatesting.com, AHamel@etatesting.com

Sample #	Sample Description	Type	Volume	Code	Comments	F/NF
A64	PENETRATION MASTIC	G/D/S D %L/D	818	PLM	ROOF	NK
A65		G/D/S D %L/D		PLM		
A66		G/D/S D %L/D		PLM		
		G/D/S D %L/D		PLM		
		G/D/S D %L/D		PLM		
		G/D/S D %L/D		PLM		
		G/D/S D %L/D		PLM		
		G/D/S D %L/D		PLM		

Relinquished by: [Signature] DATE: 5-16-24 TIME: 7A ☐ Sent Via FedEx ☒ Hand Delivered to Lab

Kevin Riley CAC-17-5871

Received by: [Signature]Name (please print) Ray Garcia (UI)

Signature

DATE: 5/16/24 TIME: 3:10 PM


Requested Analysis Circle one:


6 Hour

Page 1 of 10

2nd Carolina St., Ventura, CA 93001

5 ↓

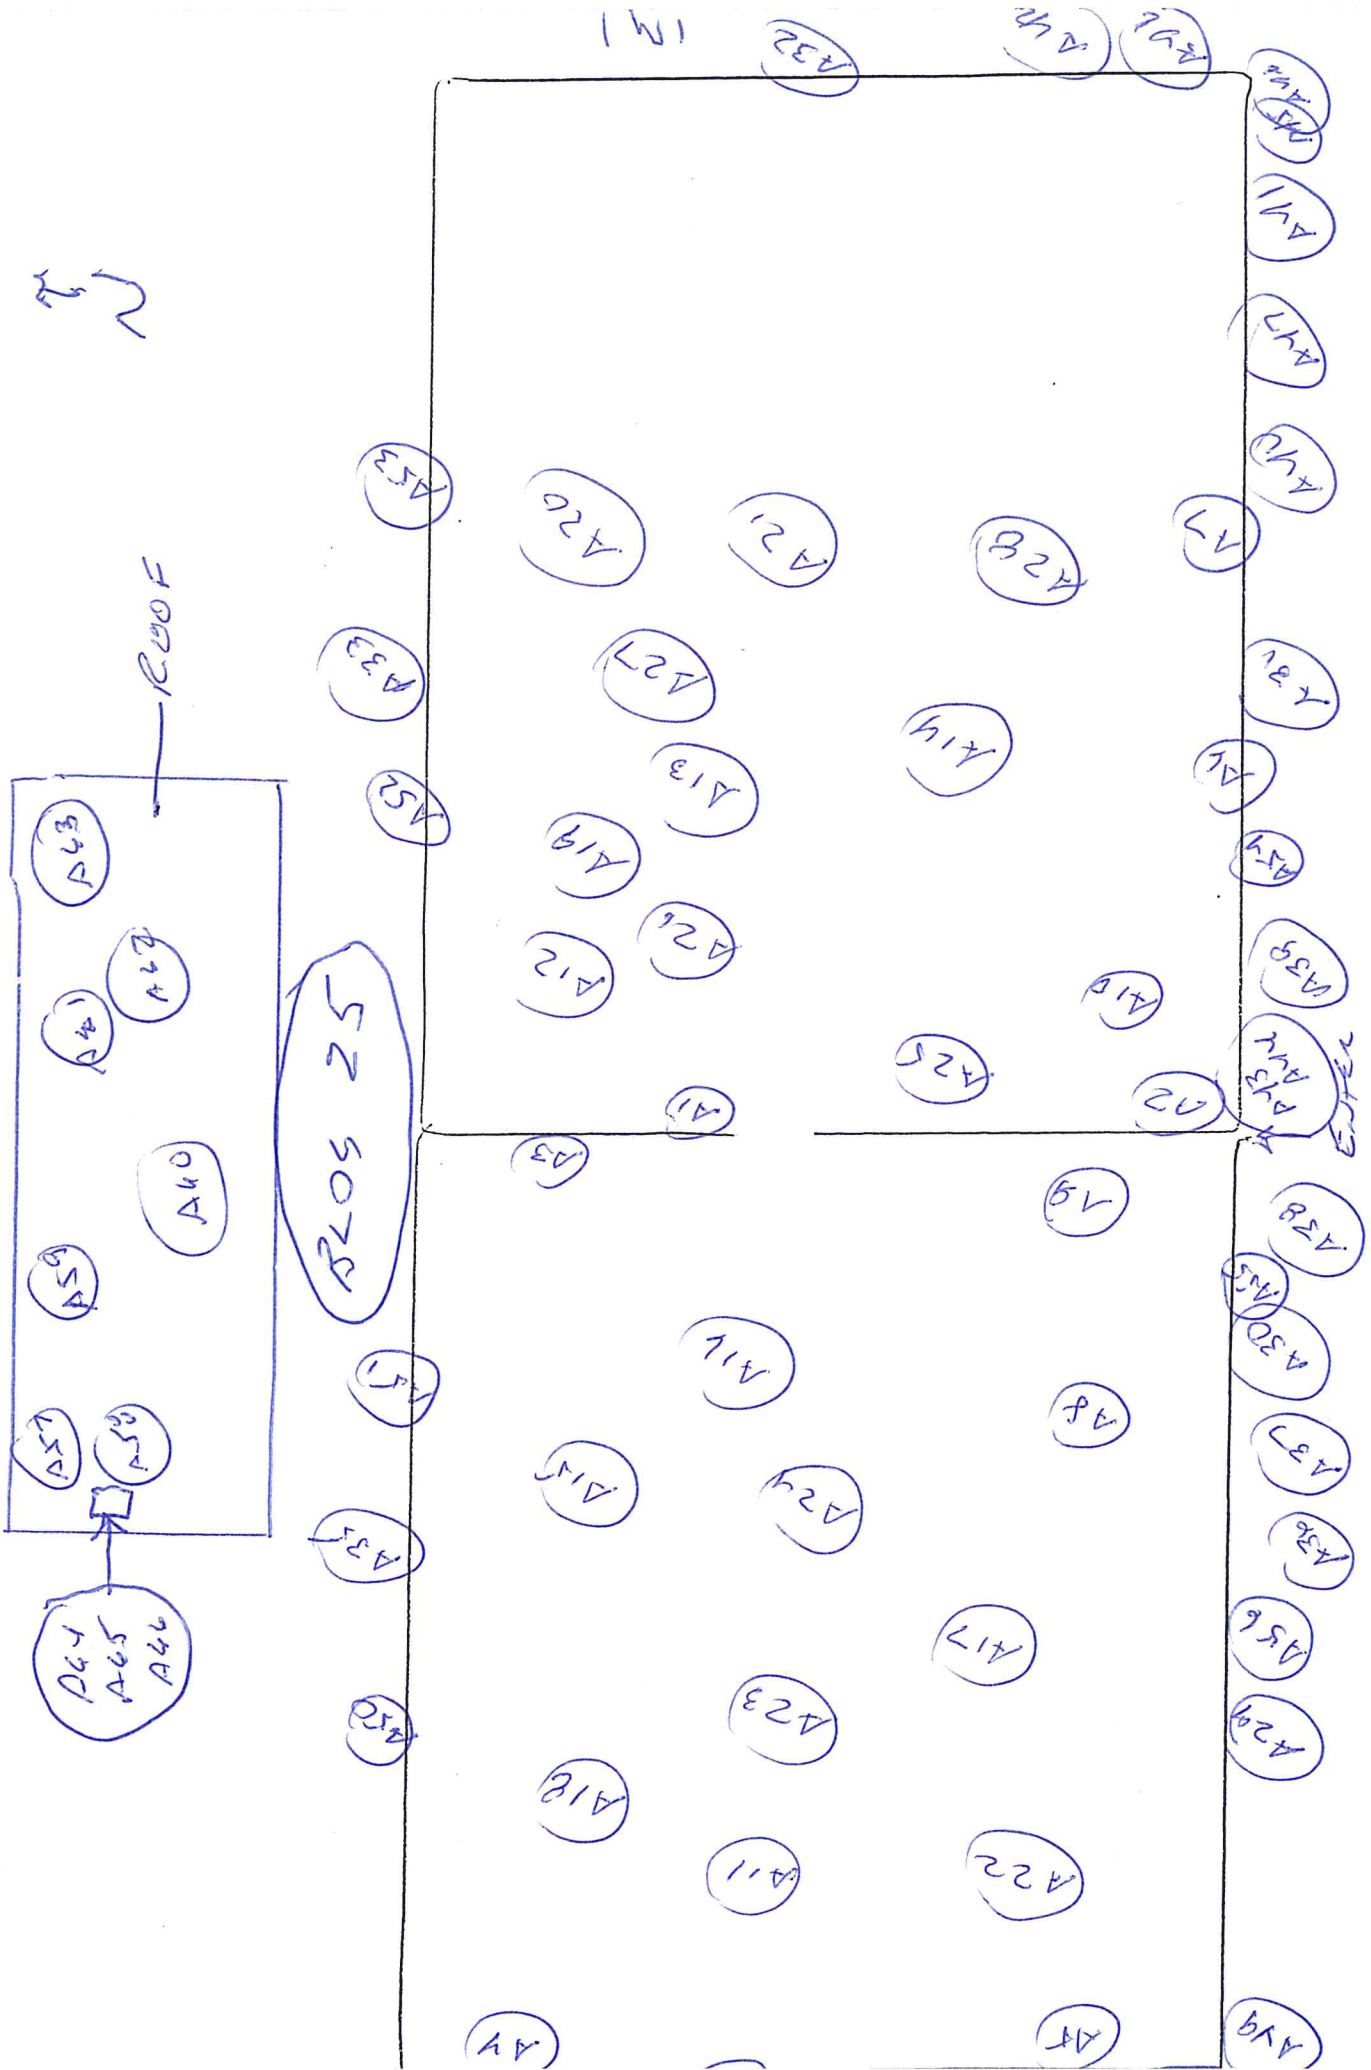

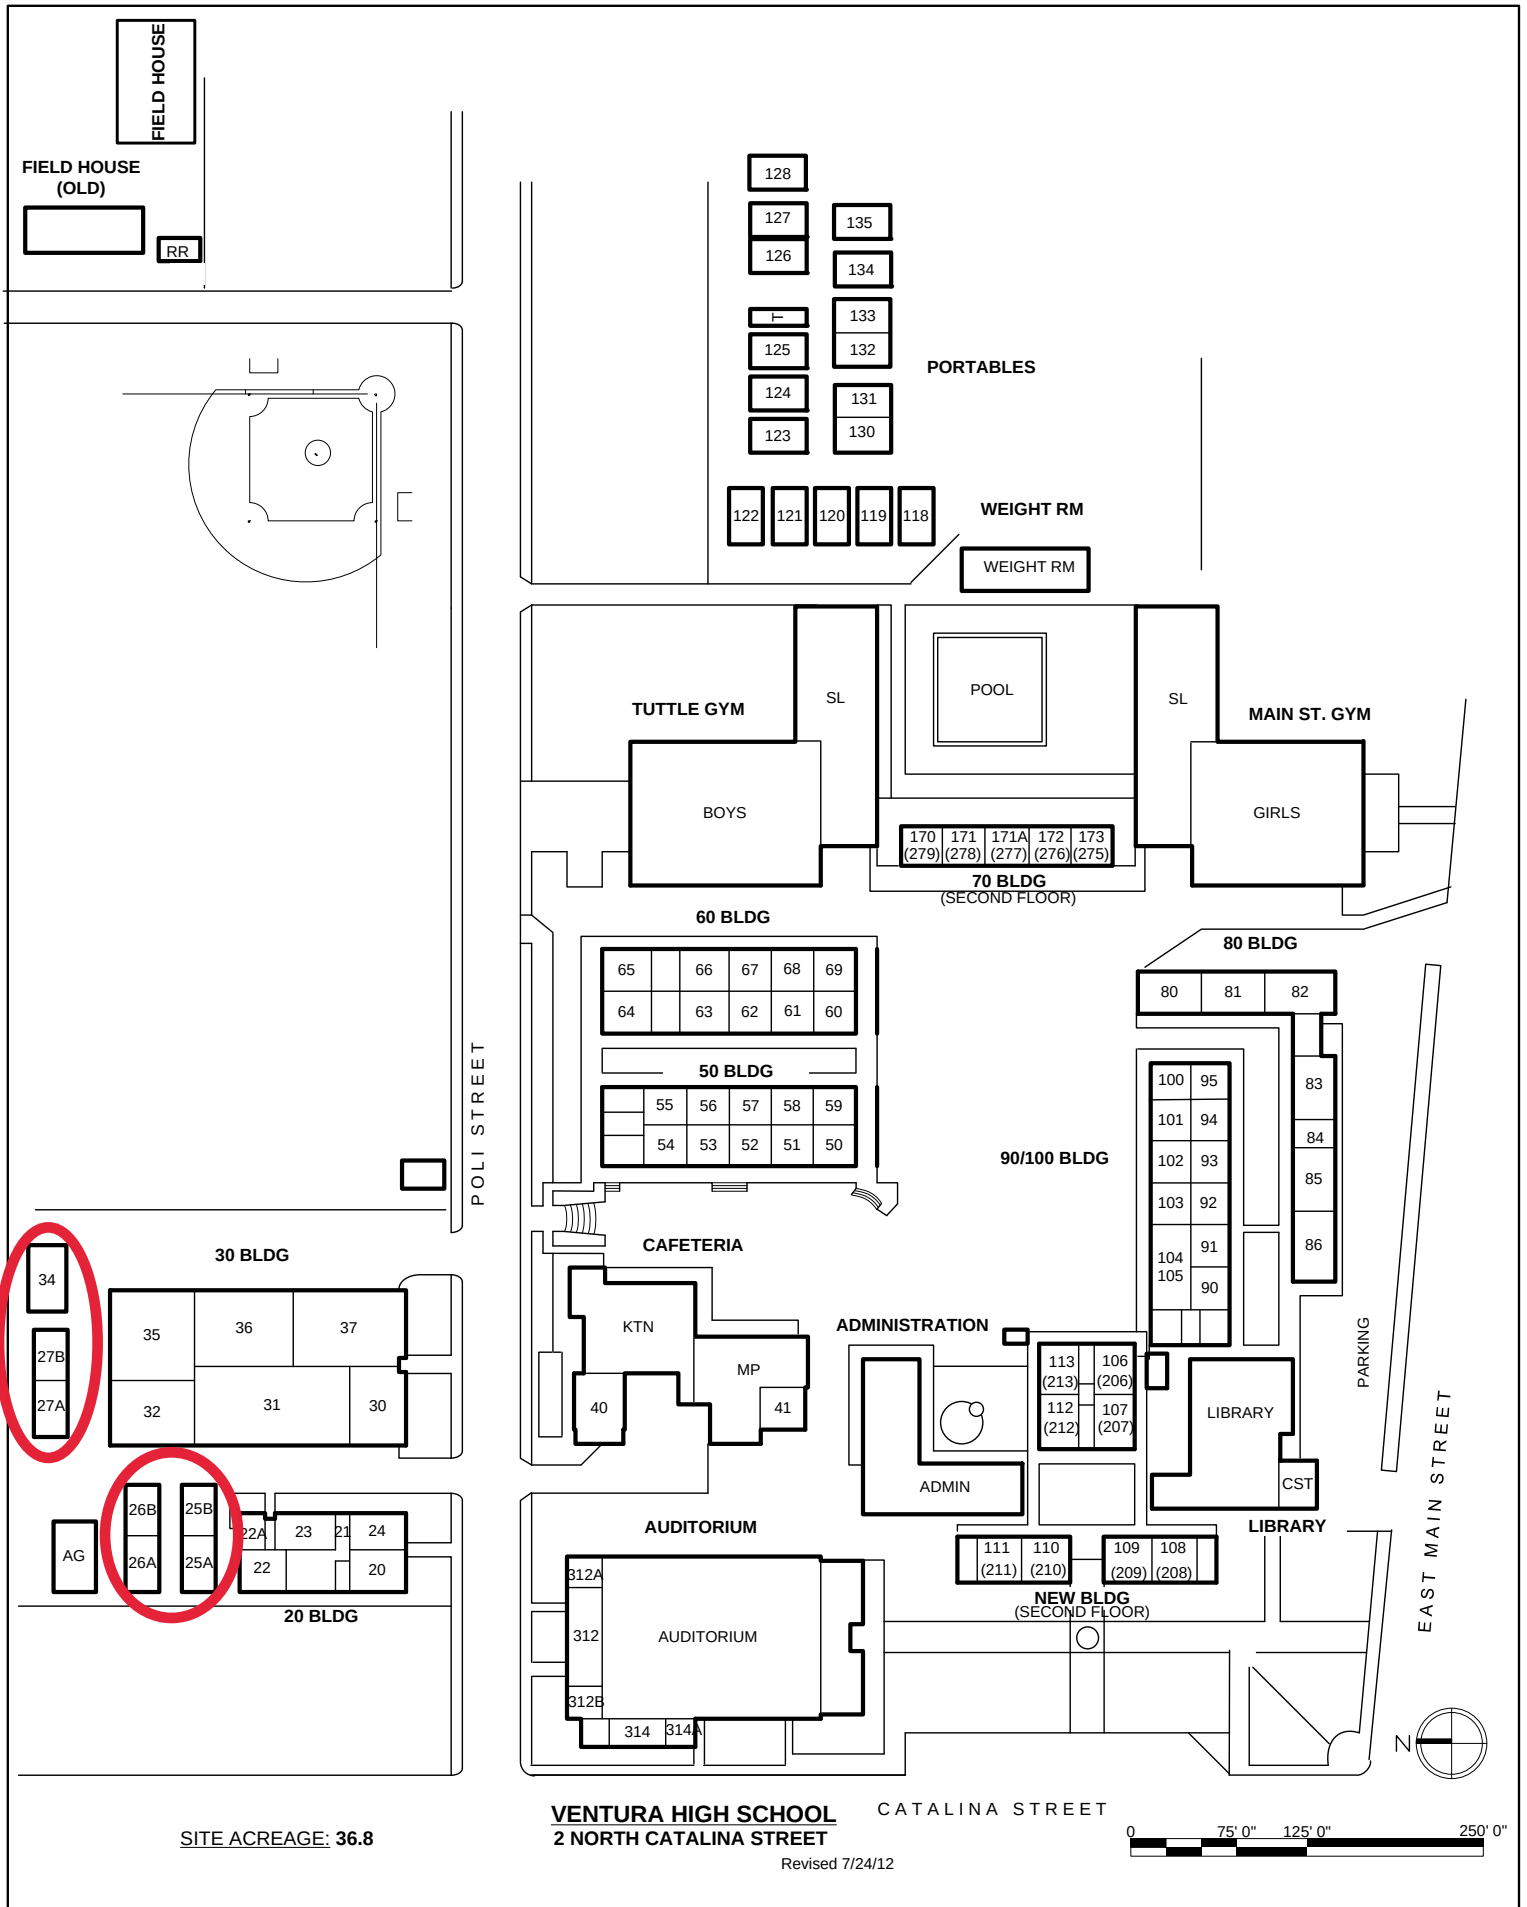







State of California
Division of Occupational Safety and Health
Certified Asbestos Consultant

Kevin R Riley

Name

Certification No. **17-5871**

Expires on **02/15/25**

This certification was issued by the Division of Occupational Safety and Health as authorized by Sections 7180 et seq. of the Business and Professions Code.

