darden
architects

6790 N. West Avenue
Fresno, California 93711
Tel: 559.448.8051
Fax: 559.446.1765
www.dardenarchitects.com

ADDENDUM NO. C

DATE:3/5/26

PROJECT:
Community Day School Modernization
Merced, CA 95340
Bid No: 2025-7

OWNER:
Merced City School District
2111 Wardrobe Ave.
Merced, CA 95340

ARCHITECT:
DARDEN ARCHITECTS, INC.
Attention:
6790 N. West Avenue
Fresno, California 93711
T. (559) 448-8051
F. (559) 446-1765

DARDEN PROJECT NO. 2533
DSA File Nos. 24-35
DSA APPL. NO. 02-123716

LICENSED ARCHITECT
GRANT E. DODSON
No. C-20,307
Ren. 6-30-27
STATE OF CALIFORNIA

It will be the responsibility of the General Contractor to submit the information contained in this addendum to all its subcontractors and suppliers. Acknowledge receipt of this Addendum in the space provided on the Bid Form. Failure to do so may subject Bidder to disqualification.

The following additions, deletions, and revisions to the SHEETS and Project Manual are hereby made and do become a part of these Contract Documents.

INDEX OF ADDENDA TRANSMITTED HEREWITH

PROJECT MANUAL:

SHEETS:

CHANGES TO SHEETS:

ARCHITECTURAL.....ADC-A01.
STRUCTURAL .....ADC-S01.

ATTACHMENTS:

SHEETS:

STRUCTURAL .....ADC-SX01.

PROJECT MANUAL:

SHEETS:

CHANGES TO SHEETS:

ARCHITECTURAL:
ADC-A01 Refer to Sheet SD/A201, OVERALL SITE PLAN

1. Basketball Equipment and Volleyball Equipment to be Contractor-Furnished, Contractor installed. Refer to Addendum B for list of Owner-Furnished Site Items.

STRUCTURAL:
ADC-S01 Refer to Sheet A/S201, FOUNDATION PLAN:

1. Refer to Sheet A/S201 and replace with herein attached sheet ADC-SX01.
2. Sheet revised to include clouding over portions of Existing Building slab to be ground down until level. This work is part of Phase 02 bid.

END OF ADDENDUM NO. B

Demolition Scope Clarification:

Interior demolition performed or included under Phase 1 is not part of the Phase 2 bid or contract.

Only interior demolition work specifically identified and clouded in the revised drawings Addendum A is included in Phase 2.

All exterior demolition indicated in the contract documents is part of the Phase 2 scope and shall be included in this bid.

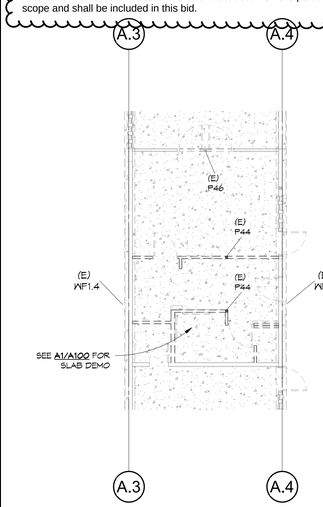

LEGEND:

(E) INTERIOR WALL TO BE DEMOLISHED

(E) POST TO BE DEMOLISHED

J1 DEMO FOUNDATION PLAN

A/S401 | A/S201 | 1/8" = 1'-0"

Demolition Scope Clarification:

Interior demolition performed or included under Phase 1 is not part of the Phase 2 bid or contract.

Only interior demolition work specifically identified and clouded in the revised drawings Addendum A is included in Phase 2.

All exterior demolition indicated in the contract documents is part of the Phase 2 scope and shall be included in this bid.

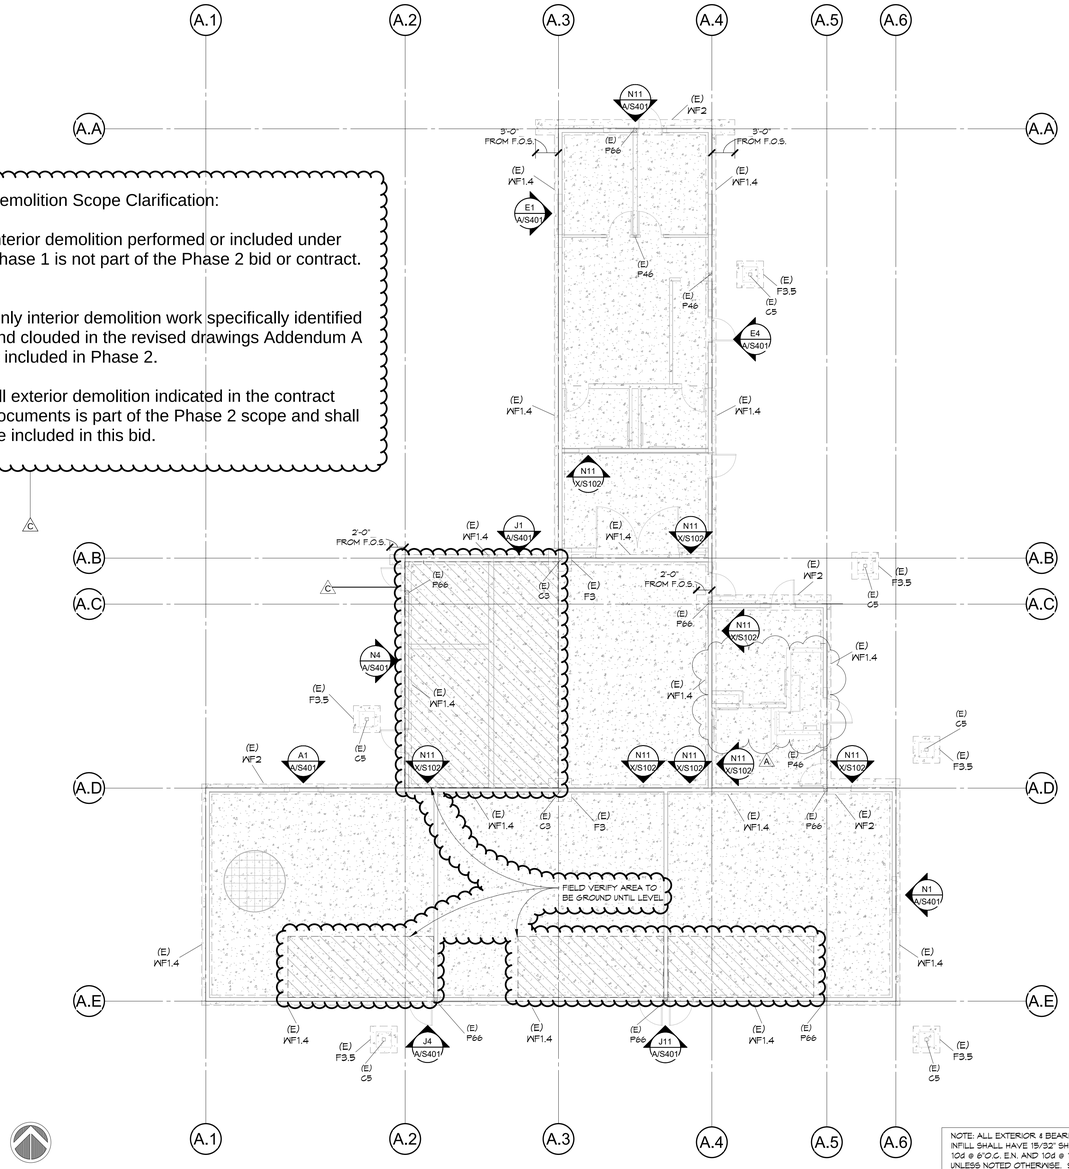

NOTE: ALL EXTERIOR & BEARING WALL INFILL SHALL HAVE 15/32" SHEATHING WITH 10d @ 6"O.C. E.N. AND 10d @ 12"O.C. F.N. UNLESS NOTED OTHERWISE. SEE NOTES FOR SHEATHING MATERIAL.

E4 FOUNDATION PLAN

A/S401 | A/S201 | 1/8" = 1'-0"

NON-BEARING WALL. PROVIDE 2x STUDS @ 16"O.C. SEE ARCHITECTURAL PLANS FOR THICKNESS OF STUDS REQUIRED. SEE TYPICAL NON-BEARING WALL CONNECTION DETAIL FOR TOP OF WALL CONNECTION.

"XX" AS INDICATED ON PLAN. SEE TYPICAL SCHEDULES AS FOLLOWS:
C# - COLUMN SCHEDULE
P# - WOOD POST SCHEDULE
WF# - WALL FOOTING SCHEDULE
F# - FOUNDATION SCHEDULE

F.F. +X'-X" — FINISHED FLOOR (F.F.) OR TOP OF FRAMING (T.O.F.). +X'-X" IS THE DISTANCE FROM FINISHED FIRST FLOOR, UNLESS NOTED OTHERWISE

(E) 4" CONC. SLAB W/ 6x6/#6x#6 WELDED WIRE FABRIC U.N.O., TYP.

N14 LEGEND

A/S201 | NOT TO SCALE

1. SEE TYPICAL SHEETS FOR ALL GENERAL AND MATERIAL NOTES, AND ALL TYPICAL SCHEDULES AND DETAILS. THE INFORMATION ON THE TYPICAL SHEETS APPLY TO THE PROJECT AND ARE NOT SPECIFICALLY REFERENCED ON PLAN WORK, UNLESS NOTED OTHERWISE. IF TYPICAL DETAILS ARE SPECIFIED ON PLANS OR NOTES, THEY WILL BE REFERENCED WITH THE WORD "TYPICAL" FOLLOWED BY BOLD AND UNDERLINED TEXT STATING THE TITLE OF THE TYPICAL DETAIL OR NOTE.
2. ALL UNCLEAR AND/OR MISSING DETAILS SHALL BE BROUGHT TO THE STRUCTURAL ENGINEER'S ATTENTION BEFORE PROCEEDING WITH CONSTRUCTION.
3. SEE CIVIL AND/OR ARCHITECTURAL SITE PLAN FOR LOCATION AND DIMENSIONS OF SIDEWALKS, MOW STRIPS, PLANTERS AND OTHER LANDSCAPING FEATURES.

J14 FOUNDATION NOTES

A/S201 | NOT TO SCALE

STRUCTURAL COLUMN SCHEDULE

MARK	TYPE	COMMENTS
(E) C3	(E) Pipe35TD	
(E) C5	(E) HSS5X5X1/4	
(E) P44	(E) 4x4	
(E) P46	(E) 4x6	
(E) P66	(E) 6x6	

STRUCTURAL FOUNDATION SCHEDULE

MARK	TYPE	REINFORCEMENT
(E) F3	3'-0" SQ. x 1'-2" DEEP FOOTING	(3) #5 EA. WAY @ BOTTOM
(E) F3.5	3'-6" SQ. x 1'-2" DEEP FOOTING	(3) #5 EA. WAY @ BOTTOM
(E) WF1.4	1'-4" WIDE x 1'-0" DEEP CONT.	(2) #5 @ TOP & BOTTOM
(E) WF2	2'-0" WIDE x 1'-0" DEEP CONT.	(2) #5 @ TOP & BOTTOM

DSA File No.: 24-35

DSA Application No.: 02-123716

Agency Approval

BrooksRansom ASSOCIATES
7416 N. PALM AVE. STE 100 | FRESNO, CA 93711
(559) 449-8444 OFFICE | (559) 449-8454 FAX
25421

REGISTERED PROFESSIONAL ENGINEER GAYLORD R. RANSOM No. S2386 EXPIRES 3-31-26 STRUCTURAL STATE OF CALIFORNIA

Consultant

Community Day School Modernization
Merced City Unified School District
Merced, CA, 95340

Project

BUILDING A
FOUNDATION PLAN

Drawing

darden architects
ARCHITECTURE PLANNING INTERIORS
www.dardenarchitects.com
6790 N. West Ave. • Fresno, CA 93711 • T. 559.448.8051

LICENSED ARCHITECT GRANT E. DORSEY No. C-20,207 Exp. 6-30-27 STATE OF CALIFORNIA

Architect

No.	Revision/Submission	Date
A	Addendum A	3/2/2026

Revision

Designed By: GR
Drawn By: GR
Checked By: SOC
Reviewed By: SOC

Copyright Darden Architects

Scale: As indicated
Project Number: 2533
Date: 3/2/2026

A/S201

ADC-SX01

2/25/2026 1:11:23 PM
C:\Users\GabrielI\Documents\25421 Merced CDS Mod_gabrielRYC5L.rvt