


WCSD



Wallkill Central School District, 1500 Route 208, PO Box 310 Wallkill, New York 12589
(845) 895-7102, Fax: (845) 895-3630

Brian Devincenzi
Assistant Superintendent for Support Services

To: Mr. White
From: Brian Devincenzi 
Date: March 12, 2026
Re: Capital Improvement Contracts

RECEIVED

MAR 12 2026

SUPERINTENDENT'S OFFICE
WALLKILL CENTRAL SCHOOL DISTRICT

BACKGROUND INFORMATION

On January 15, 2026, February 23, 2026, and March 9, 2026, bids for the Capital Improvement Project at the Wallkill Central School District were received by the Project Manager from State Contract and Cooperative vendors.

RECOMMENDATION

It is recommended that the cooperative bids be awarded as indicated below:

Athletic Flooring System – Wallkill Senior High School

Endurance Flooring
35 Colby Ave, Suite 1
Manasquan, NJ 08736

Awarded in conjunction with the Sourcewell Contract #031022-RBI.
SUGGESTED CONTRACT AWARD:

\$533,014.00

Replacement of Bleachers – John G. Borden Middle School

Young Equipment
325 Rabro Drive
Hauppauge, NY 11788

Awarded in conjunction with the Ed Data Contract #12894.
SUGGESTED CONTRACT AWARD:

\$122,676.00

Playground System – Leptondale Elementary School

Young Equipment
325 Rabro Drive
Hauppauge, NY 11788

Awarded in conjunction with the Ed Data Contract #13391.
SUGGESTED CONTRACT AWARD:

\$161,740.00



BARONE CONSTRUCTION GROUP, INC.
"BUILDING A FUTURE OF EXCELLENCE"

March 11, 2026

Mr. Brian Devincenzi
Assistant Superintendent for Support Services
Wallkill Central School District
1500 Route 208
Wallkill, NY 12589

RE: Recommendation for Award for: Wallkill Central School District Reconstruction Phase 3 project for material and installation of the Athletic Flooring System at Wallkill Senior High School.

Dear Mr. Devincenzi:

On Thursday, January 15th, 2026, we received a bid for the Wallkill Central School District Reconstruction Project Phase 3 for the Gym Floor Contract at John G. Borden Middle School.

Barone Construction Group, Inc., BCG, in conjunction with Tetra Tech Architects & Engineers recommend the following Contract.

After careful consideration and review we recommend for award the following contract in conjunction with the Sourcewell Contract #031022-RBI

Endurance Flooring
35 Colby Ave, Suite 1
Manasquan, NJ 08736

Base Bid	\$380,164.00
Allowance	\$152,850.00
Total Contractor (Base Bid plus any Alternate)	\$533,014.00

Should you have any inquiries, do not hesitate to reach out to me at 845-691-2244. Thank you.

Sincerely,

Joseph Barone
President
Barone Construction Group, Inc.

Proposal for Services

Page 1 of 1

(Pricing valid for 90 days)



Floors engineered, manufactured, and
Installed with the capacity to endure

DATE: January 15, 2026
PROJECT: John G. Borden Middle School
ADDRESS: 109 Bona Ventura Ave
Wallkill, NY 12589

Sourcewell Contract #031022-RBI

MVP by Robbins Sports Surfaces : Total System Square Footage: 6,200 (including waste)

Co-Op Base Price	Line-Item Description	SQFT	Total
Line Item #1	MVP	\$ 25.00	\$ 155,000.00
Line Item #14	Water Based Finish	\$ 1.56	\$ 9,685.00
Line Item #41	Custom Design Solutions	\$ 1.95	\$ 12,090.00
Line Item #45	Freight	\$ 1.78	\$ 11,050.00
Line Item #46	Custom Logos / Gamelines	\$ 2.41	\$ 14,950.00
Line Item #47	Wall Base	\$ 1.39	\$ 8,593.00
Line Item #49	Concrete	\$ 22.90	\$ 142,000.00
Line Item #52	Moisture Suppression – Traxx95	\$ 2.33	\$ 14,430.00
Line Item #53	Special Labor Adjustment – Prevailing Wage	\$ 1.99	\$ 12,366.00
Total			\$ 380,164.00

Includes:

- Labor Priced at Ulster County Prevailing Wage, Straight Time
- Includes Thresholds and Saddles
- Existing Gameline Layout – W Logo, 1 Main Basketball, 1 Volleyball, 2 Side Court Basketball Courts
- Performance Bond Included
- Average 1-1/2" Pour Throughout the Gym – 2 Pours, Tolerance to be 1/8" no 10'
 - Need Electrician to Hook Into School Power
 - Need Access to Water


Build Up

5-1/2" Depth AFTER Abatement

- 1-1/4" Pour
- 1/4" Topping Pour for 1/8" on 10' Tolerance
- 3/4" Plywood Build Up
- 3" Flooring System

Exclusions:

- Sales Tax – Project priced tax exempt
- Bleachers to be Demolished and Removed by the School
- Abatement and Demolition by Others


Endurance Flooring
Authorized Signature
Michael Mangan, President

Client Authorized Signature

Accepted by	Title	Date
-------------	-------	------

35 Colby Ave, Suite 1 · Manasquan, NJ 08736 · (732) 800-3700

www.endurance-flooring.com

jwalsh@endurance-flooring.com



Robbins Sports Surfaces

Sourcewell Contract #: 031022-RBI

Effective: January, 2026 *cancels previous lists*

For 2026 installations

All prices in U.S. dollars.

Quotations and Installation by Authorized Robbins Dealers


Ceiling prices shown per SF. Robbins dealer please quote and register.

All standard floors include "Basic Graphics".

Item	Product	List	SW Price	Additional Info.
1	MVP®	\$ 31.99	\$ 27.82	MFMA 2nd & Btr., XL+, 25/32" by 2 1/4"
2	UniMax100	\$ 27.60	\$ 24.00	MFMA 2nd & Btr., XL+, 25/32" by 2 1/4"
3	BioChannel Classic	\$ 26.46	\$ 23.01	MFMA 2nd & Btr., XL+, 25/32" by 2 1/4"
4	BioChannel SB	\$ 22.45	\$ 19.52	MFMA 2nd & Btr., XL+, 25/32" by 2 1/4"
5	BioChannel(R) Star	\$ 21.76	\$ 18.92	MFMA 2nd & Btr., XL+, 25/32" by 2 1/4"
6	Eclipse® SB (anchored)	\$ 22.69	\$ 19.73	MFMA 2nd & Btr., XL+, 25/32" by 2 1/4"
7	AirChannel(R) Star	\$ 18.26	\$ 15.88	MFMA 2nd & Btr., XL+, 25/32" by 2 1/4"
8	BioCushion®	\$ 20.07	\$ 17.45	MFMA 2nd & Btr., XL+, 25/32" by 2 1/4"
9	Sportwood(R) Ultra Star	\$ 19.11	\$ 16.62	MFMA 2nd & Btr., Parquet(PQ), 7/16"
10	Installation of strip maple flooring on existing sub-floor. Demo not included	\$ 17.82	\$ 15.49	MFMA 2nd & Btr., XL+, 25/32" by 2 1/4"
11	All-Star Plus Portable Floor	\$ 242,948	\$ 211,259	112' X 60' Robbins All-Star Plus Portable Basketball Floor, MFMA Second and Better Grade, 25/32" Thick by 2 1/4" Face Width, Basic Graphics, see description and specifications.
12	Screen & Recoat (Oil)	\$ 2.20	\$ 1.91	Per Robbins Dealer specification.
13	Sand & Finish (Oil)	\$ 7.91	\$ 6.87	Per Robbins Dealer specification.
14	Water-based finish option (add)		\$ 2.94	Water based gym-finish procured and applied by Robbins dealer.
15	Pulastic Pro 165	\$ 19.88	\$ 17.29	16.5mm
16	Pulastic Classic 110	\$ 14.40	\$ 12.52	11mm
17	Pulastic Classic 90	\$ 13.72	\$ 11.93	9mm
18	Pulastic Academy 90	\$ 13.72	\$ 11.93	9mm
19	Pulastic Classic 60	\$ 13.05	\$ 11.35	6mm
20	Comfort Court 50	\$ 16.46	\$ 14.31	5mm
21	Pulastic "Eco" option (add)	\$ 1.28	\$ 1.12	
22	Pulastic FL "face-lift"	\$ 10.80	\$ 9.39	
23	Galaxy Classic iLock Tiles	\$ 10.20	\$ 8.87	3/8"
24	Galaxy Classic Roll 10% Color	\$ 13.77	\$ 11.98	3/8"
25	Galaxy Classic Roll 20% Color	\$ 14.63	\$ 12.72	3/8"
26	Galaxy Classic Roll 35% Color	\$ 15.52	\$ 13.49	3/8"
27	Galaxy Ultra Tiles	\$ 20.97	\$ 18.23	10mm
28	Galaxy FIT Tiles	\$ 21.64	\$ 18.82	10mm
29	Galaxy Extreme Tiles 10% Color	\$ 19.04	\$ 16.56	1"

30	Galaxy Extreme Tiles 35% Color	\$ 19.65	\$ 17.09	1"
31	Galaxy Extreme Tiles 95% Color	\$ 20.52	\$ 17.84	1"
32	Pulastic GT 100	\$ 18.86	\$ 16.40	10mm
33	Galaxy Xtreme R	\$ 23.04	\$ 20.03	18mm
34	Durathon Elite 10mm	\$ 16.74	\$ 14.55	10mm
35	Durathon Elite 13.5mm	\$ 18.88	\$ 16.41	13.5mm
36	Danzaire® Wood Sprung Floor	\$ 49.70	\$ 43.22	MFMA 2nd & Btr., XL+, 25/32" by 2 1/4"
37	La Lena Studio A Wood	\$ 47.39	\$ 41.21	MFMA 2nd & Btr., XL+, 25/32" by 2 1/4"
38	Forever® Marley	\$ 39.12	\$ 34.02	
39	Custom Colors	NA	Per Project	
40	IAAF/NCAA Surveyed and Certified Track and Field Line Markings	NA	Per Project	
41	Custom Design Solutions	NA	Per Project	
42	MFMA Grade of Maple Flooring	NA	Per Project	Options include 1st , 3rd & Better and 3rd Grade
43	"Hot List" or Special Discount Pricing	NA	Per Project	Based on Availability
44	Sales Tax, Duties, Fees	NA	Not Included	
45	Freight	NA	Per Project	
46	Custom Logos and Graphics	NA	Per Project	
47	Wall Base	NA	Per Project	
48	Thresholds	NA	Per Project	
49	Concrete Correction	NA	Per Project	
50	Demolition	NA	Per Project	
51	Modifications for LEED	NA	Per Project	
52	Moisture Suppression	NA	Per Project	
53	Special Labor Regions		Per Project	Union Labor Agreements, Prevailing wage, special labor agreements. Some regions of the US and Canada may require pricing modification due to union labor agreements or specified prevailing wage requirements. Examples of these regions include; NY, NJ, HI, CA, AK, IL, DC, CT, MA. Please allow dealer to modify price to accomodate additional labor cost.

Basic Graphics Description: Includes appropriate basic gamelines for basketball and volleyball based on the size of the project. Does not include solid borders, solid keys, custom colors, any stain work or any logos. All custom graphics must be priced on a per project basis.

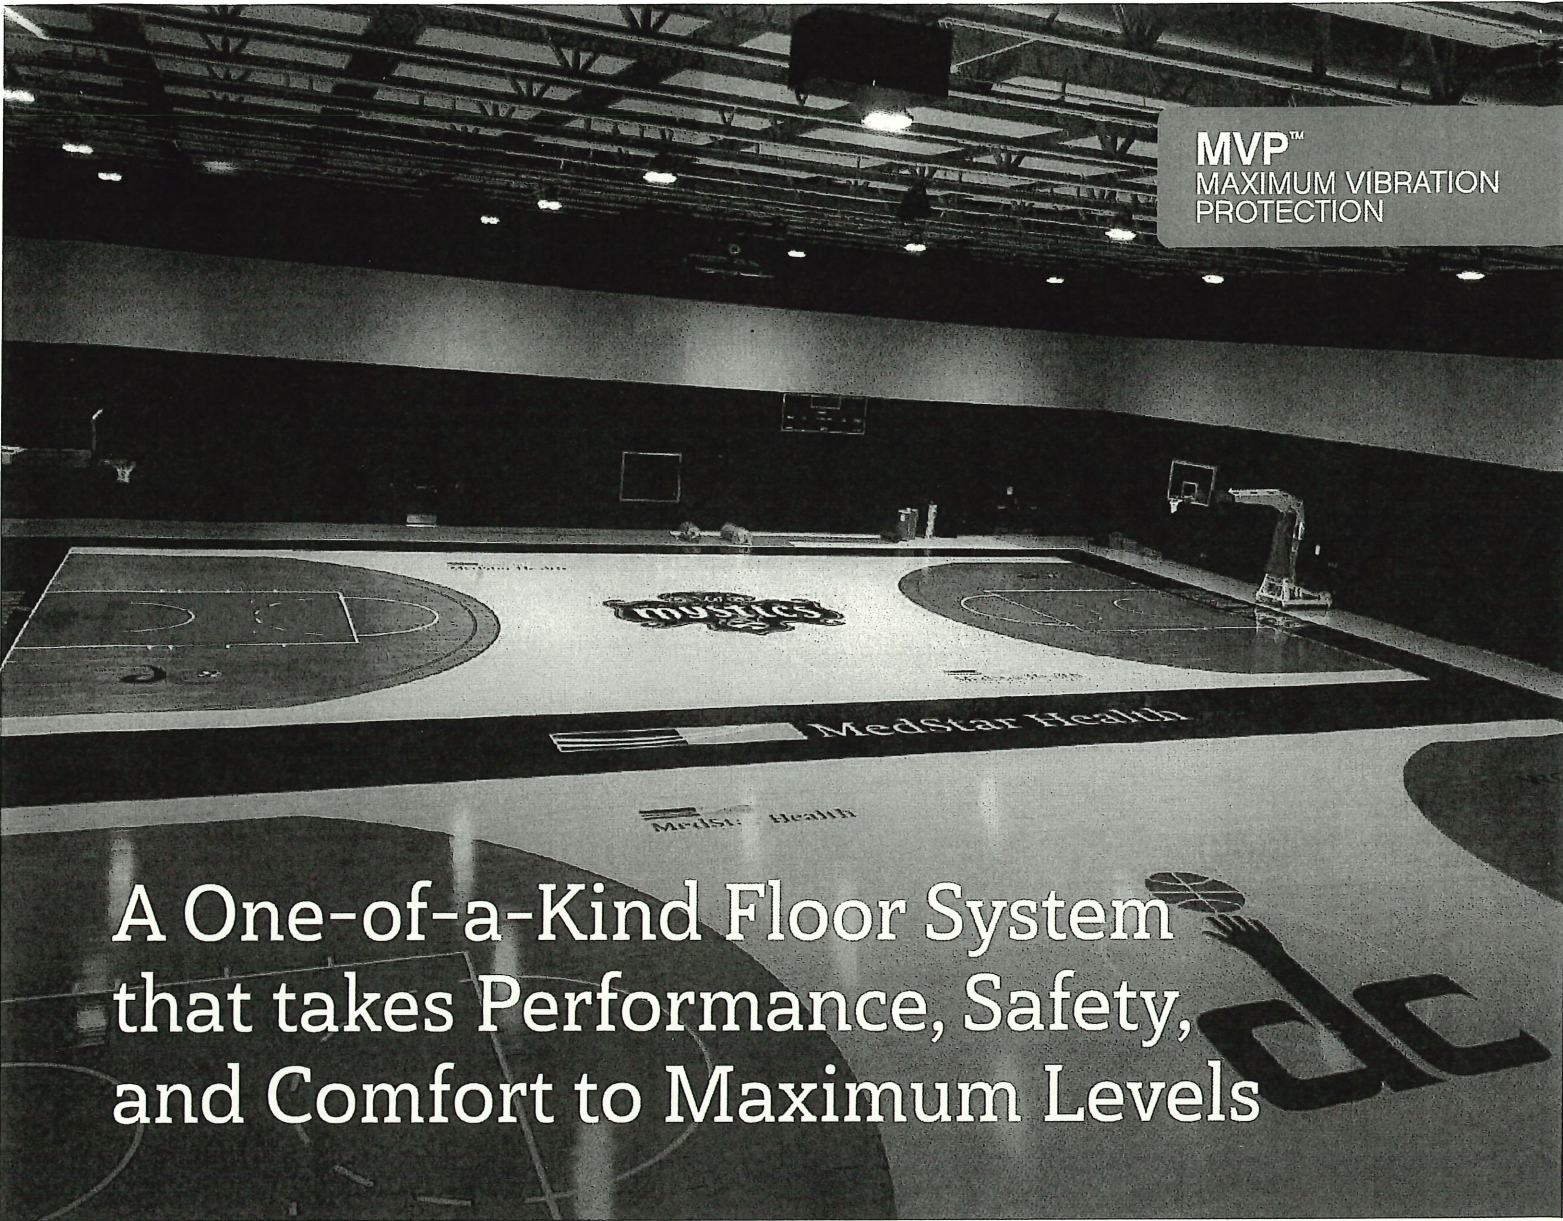


MVP™
MAXIMUM VIBRATION
PROTECTION

A One-of-a-Kind Floor System that takes Performance, Safety, and Comfort to Maximum Levels

MVP, Robbins' innovative flooring design tuned to minimize vibration and maximize uniformity, takes your athletes' performance, comfort, and safety to unrivaled levels.

Athletes use less energy and are able to perform at peak levels for longer periods of time PLUS they are less likely to be injured due to fatigue. Dozens of top NBA and NCAA programs have invested in their athletes by choosing MVP from Robbins.

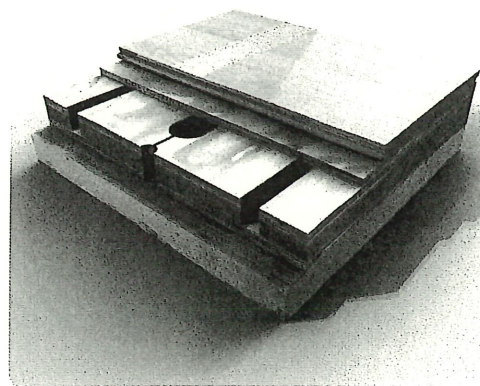

Robbins 

Proven Safety.
Proven Performance.
Proven Winners.

robbinsfloor.com • 1.800.543.1913

Backed by science, MVP™ offers optimal damping time, vibration frequency, and uniformity — all factors that contribute to peak athletic performance. Basketball and volleyball programs considering athletic load management can count on MVP as the best flooring equipment available.

SYSTEM BENEFITS



UNIFORMITY

- Patented sub-floor design conforms to the concrete slab preventing dead-spots.
- System design optimizes ball-bounce and promotes consistent player comfort.



VIBRATION DAMPING

- Research reveals eliminating certain vibration frequencies reduces fatigue and lower extremity injury.
- No rigid contact or connections between the concrete slab and the active layers of the system damps vibration and promotes player comfort.




PROVEN TRACK RECORD

- No other floor system has been adopted by so many NBA and top university basketball programs for their performance, practice and training facilities.



PRODUCT SPECIFICATIONS

System Type	Anchored Resilient System
Slab Depression	2 7/8" (73mm) with 25/32" (20mm) thick flooring
Surface	MFMA Northern Hard Maple
Anchorage	No hard connections to active layers.
Subfloor Construction	Continuous panel subfloor
Resilient Layer	Vibration damping Zero/G® Shockpad
Vibration Damping	Time to Total Damping where total damping is considered at $\leq 2\text{ms}^{-2}$ acceleration. • Time to total Damping shall be ≤ 45 milliseconds at both 50 and 85cm.
FFT Vibration Intensity	• Must be $\leq 100,000$ across 0-250Hz frequency range at both 50 and 85cm from point of impact. • Must be less than 200 in the 0-50Hz range at both 50 and 85cm from point of impact.
System Equivalents	No Equivalents Exist
Testing	Passes all material testing standards of: • DIN • PUR • EN • ASTM

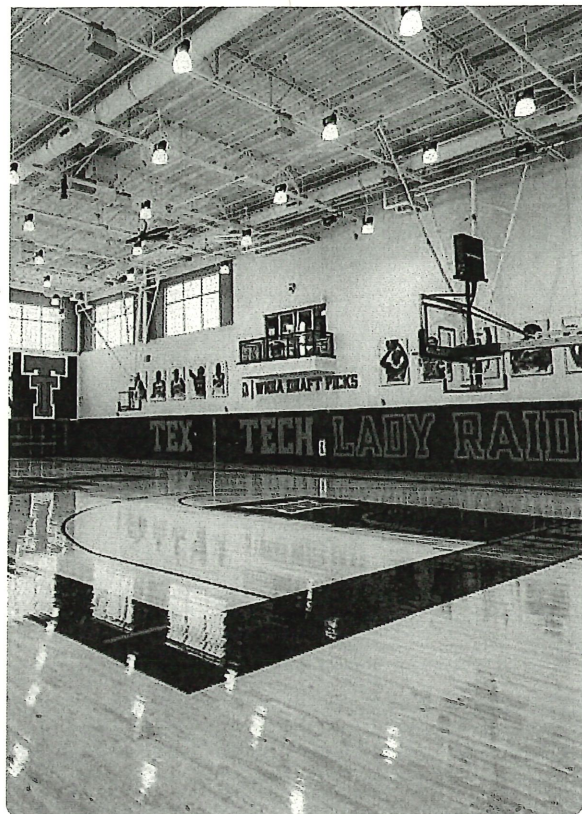

MVP REFERENCE FACILITIES

NBA & WNBA

- San Antonio Spurs, Training Facility
- Cleveland Cavaliers, Training Facility
- Orlando Magic, Training Facility
- Phoenix Suns & Mercury, Training Facility
- Indiana Pacers & Fever, Training Facility
- + Many More

NCAA

- Rutgers University, Practice Facility
- Michigan State, Practice Facility
- Vanderbilt University, Memorial Gymnasium
- Xavier University, Practice Facility
- Texas Tech, Practice Facility
- + Many More

Contact Robbins or your local authorized Robbins Dealer to arrange a face-to-face discussion on the benefits of MVP for your basketball or volleyball program.



Proven Safety.
Proven Performance.
Proven Winners.

robbinsfloor.com • 1.800.543.1913

All Rights Reserved, Copyright ©2023 Robbins, Inc.



BARONE CONSTRUCTION GROUP, INC.

"BUILDING A FUTURE OF EXCELLENCE"

March 11, 2026

Mr. Brian Devincenzi
Assistant Superintendent for Support Services
Wallkill Central School District
1500 Route 208
Wallkill, NY 12589

RE: Recommendation for Award for: Wallkill Central School District Reconstruction Phase 3 Project for Replacement of Telescoping Motorized Bleacher at John G. Borden Middle School.

Dear Mr. Devincenzi:

On Monday, February 23rd, 2026, we received a bid for the Wallkill Central School District Reconstruction Project Phase 3 for the Bleacher Contract at John G. Borden Middle School.

Barone Construction Group, Inc., BCG, in conjunction with Tetra Tech Architects & Engineers recommend the following Contract.

After careful consideration and review we recommend for award the following contract in conjunction with the Ed Data Contract #12894

Young Equipment
325 Rabro Drive
Hauppauge, NY 11788

Base Bid	\$97,676.00
Allowance	\$25,000.00
 Total Contractor (Base Bid plus any Alternate)	 \$122,676.00

Should you have any inquiries, do not hesitate to reach out to me at 845-691-2244. Thank you.

Sincerely,

Joseph Barone
President
Barone Construction Group, Inc.



325 Rabro Drive
Hauppauge, NY 11788
Phone: (631) 582-5900
Fax: (631) 582-9520
www.youngequipment.com

QUOTE

Date	Quote #
02/23/26	YESQ80241

Customer:

Wallkill CSD
Stephen Rossi
Central Administration
1500 Route 208
Wallkill, NY 12589

Project Location:

Wallkill CSD
Stephen Rossi
Central Administration
1500 Route 208
Wallkill, NY 12589

Phone: (845)629-7087

Email: srossi@wallkillcsd.k12.ny.us

Qty.	Description	Price	Total
1	Sheridan Seating Bleachers	\$0.00	\$0.00
1	Wallkill CSD Telescoping Motorizes Bleacher Seating Supply and Deliver Telescoping Motorizes Electric Friction Bleacher Seating P-Rails included as they are mandatory by code 3RD Row & Up on every aisle, best practice is to supply from the 2ND Row & Up, included. Gross # Seats: 336 Seat / Chair Type: Plastic Option 10" Seat Mount Type: Nose Mount RISE: 11.625 Inches Int. Aisles w/P-Rails: As per code. Wall Attached: RUN: 22 Inches Floor Level Aisle: As per code. Decking Type: Panelam Folding: Forward Decking Color: To be chosen with submittal drawings Seat Graphics: TBD VEP - Vinly End Panels to cover both ends Includes Shipping Quote was prepared with the information provided by Barone Construction Group. Quote will be adjusted accordingly as it will for future changes to layouts, product, attachment method, and verified information from Field/Site Visit.	\$56,018.00	\$56,018.00
1	Demolition and unloading of materials	\$12,858.00	\$12,858.00
1	Deliver and install new Telescoping Motorizes Bleacher Seating as per manufacturer specifications. Nose Mounted.	\$28,800.00	\$28,800.00

Qty.	Description	Price	Total
ED Data #12894 MSRP Furniture exp 3/31/2026		Total	\$97,676.00

We look forward to working with you on this project.
Thank you,

Danielle Sehn

danielle@youngequipment.com



BARONE CONSTRUCTION GROUP, INC.

"BUILDING A FUTURE OF EXCELLENCE"

March 11, 2026

Mr. Brian Devincenzi
Assistant Superintendent for Support Services
Wallkill Central School District
1500 Route 208
Wallkill, NY 12589

**RE: Recommendation for Award for: Wallkill Central School District Reconstruction Phase 3
Project for Equipment and Installation of Playground System at Leptondale Elementary School.**

Dear Mr. Devincenzi:

On Monday, March 9th, 2026, we received a bid for the Wallkill Central School District Reconstruction Project Phase 3 for the Playground Equipment Contract at Leptondale Elementary School.

Barone Construction Group, Inc., BCG, in conjunction with Tetra Tech Architects & Engineers recommend the following Contract.

After careful consideration and review we recommend for award the following contract in conjunction with the Ed Data Contract #13391

**Young Equipment
325 Rabro Drive
Hauppauge, NY 11788**

Base Bid	\$131,740.00
Allowance	\$30,000.00
Total Contractor (Base Bid plus any Alternate)	\$161,740.00

Should you have any inquiries, do not hesitate to reach out to me at 845-691-2244. Thank you.

Sincerely,

Joseph Barone
President
Barone Construction Group, Inc.



325 Rabro Drive
Hauppauge, NY 11788
Phone: (631) 582-5900
Fax: (631) 582-9520
www.younequipment.com

QUOTE

Date	Quote #
03/09/26	YESQ80261-01

Sold To:

Barone Construction Group, Inc.
Joseph Barone

Barone Construction Group, INC
23 New Paltz Road PO Box 876
Highland, NY 12528

Project Location:

Barone Construction Group, Inc.
Barone Construction Group, INC
23 New Paltz Road PO Box 876
Highland, NY 12528

Description	Price
Leptondale Elementary School 5-12 Playground Area Play and Park Structures playground as per design #876-181948 List Price = \$97,859.00 +400% as per Ed Data #13391 MSRP-Playgrounds Markup Price = \$391,436.00 Less Discount = -\$259,696.00 Grand Total = \$131,740.00 Scope/Details: - Provide and install playground equipment. - Provide and install approximately 145 cubic yards of engineered wood fiber surfacing - Provide and install playground border timbers around perimeter of engineered wood fiber. - Remove debris generated from installation of playground and surfacing.	\$131,740.00

We look forward to working with you on this project.
Thank you,

Ty Young
Director of Playgrounds
ty@youngequipment.com

Grand Total	\$131,740.00
--------------------	---------------------