

REQUEST FOR QUOTATION

Concrete Replacement at Various Locations



To: VENDOR COMPANY

Pre-Bid Walk Through: March 31, 2026

BID REPLY DUE BY: April 7, 2026

From: Pocatello/Chubbuck School District #25
Business Operations
3115 Pole Line Rd.
Pocatello, ID 83201
(208) 235-3220 - phone
(208) 235-3280 – fax

This is an inquiry, not an order.

Please promptly quote prices on item listed below. Price quotes to remain firm through August 2026. Bidders are required to attend a pre-site walk-through on March 31, 2026 at 10:00 a.m., before bidding, to get an understanding of the project.

Work can begin June 9, 2026 and must be completed by July 31, 2026.

DISTRICT REPRESENTATIVE: Inquiries or questions, contact Brian Glenn, Facilities Coordinator at (208) 233-2604 or email: glennbr@sd25.us

EVALUATION CRITERIA: Selection of items will be evaluated based on the following:

- 1) Price
- 2) Contractor reputation for quality of work with current customers or past performance with District 25. (Please list all jobs/contracts greater than \$10,000 performed in the past two years if contractor has not performed one for the District in past 5 years).
- 3) Vendor ability to best match the listed criteria as specified.

REPLY DUE DATE: To be considered for purchase, all quotes are due **no later than April 7, 2026** at 9:00 AM.



POCATELLO/CHUBBUCK SCHOOL DISTRICT 25
LEARNING TODAY FOR THE POSSIBILITIES OF TOMORROW

POCATELLO/CHUBBUCK SCHOOL DISTRICT NO. 25
REQUEST FOR QUOTATION

Sealed bids will be received at the Pocatello/Chubbuck School District No. 25 Business Office, Bannock County, Idaho at 3115 Pole Line Road, Pocatello, Idaho, 83201, until **9:00 AM, on April 7, 2026** for the following:

2026 Concrete Replacement at Various Locations

A **mandatory pre-bid conference** and walk-thru to review the projects will be held at the District Maintenance Shop, 185 E. Maple, Pocatello, Idaho, on **March 31, 2026 at 10:00 AM**.

Specifications or additional details, (including bid forms), may be secured at the Business Office, 3115 Pole Line Road, Pocatello, Idaho, 83201 or by calling (208) 235-3270. All bids must be on the forms furnished, all blank spaces filled, and signed with the name and address of the Bidder. No unqualified bids will be read.

Each bid shall be accompanied by a certified check, cashier's check, or a bidder's bond, (executed by a qualified surety company with the power to do business in the State of Idaho) in the sum of not less than five percent, (5%) of the total bid, made payable to Pocatello/Chubbuck School District No. 25, Bannock County, Pocatello, Idaho. This surety shall be forfeited by the bidder in the event of failure to enter into a contract. Personal or company checks will not be accepted. Compliance with Idaho Public Works Law is required.

The Board of Trustees reserves the right to reject any or all bids or to waive any informalities, or to accept the bid or bids deemed best for Pocatello/Chubbuck School District No. 25, Bannock County, Pocatello, Idaho.

Rena Johnson, Clerk
Pocatello/Chubbuck School District No. 25

INSTRUCTIONS TO BIDDERS

BIDS:

Sealed bids will be received on or before the time and date set forth under Invitation to Bid

The owner reserves the right to accept or reject any part or all bids.

Bidders submitting a bid on this work will be required to figure and furnish everything as called for by these specifications and the requirements of the Bid sheet.

All bids shall be in a sealed envelope addressed to the Pocatello/Chubbuck School District No. 25 Business Office, Bannock County, Idaho at 3115 Pole Line Road, Pocatello, Idaho. The following shall be written on the exterior of the envelope:

“BIDS FOR 2026 Concrete Replacement AT VARIOUS LOCATIONS
TO BE OPENED AT 9:00 AM MST on April 7, 2026”

Bids not delivered by contractors at time of bid opening must be received in mail no later than 4:00 PM on April 6, 2026, the day before the bid opening.

EXAMINATION OF THE SITE AND DOCUMENTS: *Pre-Bid Walk through.*

Refer all questions to Mr. Brian Glenn, Facilities Coordinator, at (208)233-2604. Contact with other district staff, Board of Trustees, or Administration, will be by written permission only.

A **mandatory pre-bid conference and walk-thru** to review projects will be held at the District Maintenance Shop, 185 East Maple, Pocatello, Idaho, on March 31, 2026 at 10:00 am.

The purpose of the pre-bid conferences is to:

1. Carefully examine the specifications.
2. Visit the worksite.
3. Be fully informed of existing conditions and limitations.
4. Include in the bid sums sufficient to cover all items required by the contract, which shall rely entirely upon your own examinations in making this proposal.
5. All area dimensions are approximate and not intended to be precise. In order to reduce or eliminate change orders, it will be necessary for the bidder to complete field verification of site and dimensions.

INTERPRETATIONS:

Should a bidder find discrepancies in, or omissions from the specifications, or be in doubt as to their meaning, he should at once notify the Owner, who will send written instructions or addenda to all bidders. Questions received less than 48 hours before time for bid opening cannot be answered. All addenda issued during the time of bidding will be incorporated in the contract.

BID GUARANTEE:

As a guarantee, if awarded the contract, the bidder will execute same and furnish bond. Each bid will be accompanied by a Certified Check, Cashier's Check, or Bid Bond for not less than five percent (5%) of the base bid payable to Owner. NO PERSONAL OR COMPANY CHECKS WILL BE ACCEPTED.

OBJECTIONS:

Written objections to specifications or bid procedures must be received by the clerk, secretary, or other authorized official of the District at least one (1) business day before the date and time upon which bids are scheduled to be received, per Idaho Code Section 68-2806(c).

EVIDENCE OF QUALIFICATIONS:

Upon request of Owner, a bidder whose bid is under consideration for award of the contract shall submit, promptly, satisfactory evidence of his financial resources, his experiences, and the organization and equipment he has available for performance of the contract.

LAWS AND ORDINANCES:

The contractor hereby binds himself to protect and save harmless the owner from all damages arising from the violation of any and all Federal, State, County, City, and all other laws, rules, regulations, in the performance of the terms of the contract.

HOLD HARMLESS AGREEMENTS:

The District expects your work to conform to professional standards. The contractor is expected to hold the District harmless for all damages or claims arising out of the work performed by the contractor. The District will not agree to hold the contractor harmless for damages or claims.

EQUIPMENT:

The contractor shall provide all labor, materials, tools, and equipment, etc. necessary for the complete and substantial execution of everything described in the specifications.

STORAGE OF MATERIALS:

The contractor shall make arrangement and coordinate with the Maintenance Department for delivery and storing of materials. Any damages of life or property caused by storage of materials on the above-indicated place shall be paid for by the contractor, who shall hold the owner harmless for any damages concerning the same.

SUPERVISION:

The supervision of this work will be done by School District No. 25 Maintenance Department.

INSPECTION OF WORK:

The representative of the owner shall at all times have access to the work wherever it is in preparation or progress and the contractor shall provide facilities for such access and for inspection.

EMPLOYMENT OF RESIDENTS OF IDAHO:

In compliance with Idaho Laws, Section 44-1001 and 44-1002 Idaho Code, the contractor "... must employ ninety-five percent (95%) bona fide Idaho residents as employees on any such contracts except where under such contracts fifty (50) or less persons are employed the contractor may employ ten percent (10%) nonresidents, provided however, in all cases such employers must give preference to the employment of bona fide Idaho residents in the performance of such work...."

CONTRACTOR'S LICENSE:

In compliance with Idaho Laws, the contractor must be registered with the State of Idaho, and hold the required ***Public Works Contractor's License*** before obtaining the contract documents and before submitting a bid for this work.

INSURANCE:

All contractors who provide goods or services to the District are required to provide the District with certificates of insurance for General Liability, Auto Liability, Workers Compensation, and Professional Liability if applicable.

The General Liability and/or Professional Liability certificate must name the District as an additional insured under the contractor's policy.

Certificates are to be provided to the District prior to any work commencing on District property. This would include the placement of any equipment or materials at the work site.

Minimum Insurance Limits

General Liability \$1,000,000 per occurrence
 \$1,000,000 products and completed operations
 \$1,000,000 annual aggregate

Auto Liability \$1,000,000 per occurrence

Workers Compensation Statutory

PERFORMANCE BOND:

The successful bidder will be required to furnish a 100% performance bond when entering into the contract work, per Idaho Code Section 54-1926, "...conditioned upon the faithful performance of the contract in accordance with the plans, specifications and conditions thereof."

PAYMENT BOND:

The successful bidder will be required to furnish a 100% payment bond when entering into the contract work, per Idaho Code Section 54-1926, "solely for the protection of persons supplying labor or materials, or renting, leasing, or otherwise supplying equipment to the contractor or his subcontractors in the prosecution of the work provided for in such contract."

5% RETAINAGE:

The Owner will retain 5% of the Contractor's earned sum to ensure faithful performance. This 5% will be released to the Contractor upon receipt of tax release from State of Idaho.

OWNER/CONTRACTOR AGREEMENT:

The Agreement for the work will be written on a District provided Form of Agreement between Owner and Contractor where the basis of payment is a stipulated sum.

LIQUIDATED DAMAGES:

Contractor shall be required to pay Owner as liquidated damages the sum of \$500 for each day, after the scheduled completion date, that the project is unfinished.

CHANGES IN THE WORK:

The owner, without invalidating the contract, may order extra work or make changes by altering, adding to, or deducting from the work; the contract sum being adjusted accordingly. All such work shall be executed under the conditions of the original contract, except that any claim for extension of the time caused thereby shall be adjusted at the time of ordering such change.

The total allowance for combined overhead and profit for changes shall be included in the total cost to the owner and shall be based on the following schedule:

- a) For the Contractor, 10% over cost;
- b) For the Sub-Contractor, 15% over cost to be divided 10% for Sub-Contractor and 5% for Contractor; and
- c) For any Sub-Subcontractor, 15% over cost to be divided 5% for Contractor, 5% for Sub-Contractor, and 5% for Sub-Subcontractor.

FORM WH5:

Per Idaho Code Section 54-1904A, within thirty (30) days of award of bid, the contractor shall file with the State Tax Commission a form WH-5, Public Works Contract Report.

WARRANTY:

Manufacturer shall warrant products, projects under normal use to be free from defects in materials and workmanship for a period of one year from date of installation and completion of project.

Warranty shall cover repair or replacement of areas determined defective upon inspection.

CLEAN UP:

The contractor shall at all times keep the premises free from accumulations of waste material or rubbish caused by his employees or work, and at the completion of the work he shall remove all his rubbish from and about the building and all tools and surplus materials and shall leave his work clean. In case of dispute, the owner shall remove the rubbish and surplus materials and charge the cost to the

contractor. At no time shall the School District Dumpsters be used to remove the Contractor's waste or garbage scraps.

IDAHO EMPLOYER ALCOHOL AND DRUG-FREE WORKPLACE ACT: Include with your bid sheet a contractor's affidavit pursuant to Idaho Code Section 72-1717.

BIDDER CERTIFICATION FORM: All bidders must complete and submit the Bidder Certification Form included with this bid request.

PAYMENTS:

Prices must remain firm as quoted by supplier until quantity awarded is received. Application for payment dated on or before the 25th of the month, shall be paid by the 15th of the following month. Application for payment dated after the 25th of the month, shall be paid within 30 days. Invoices must break down work by school and other District buildings, then totaled.

Delivery may be accepted any time, however, payment for the 2026-2027 fiscal year cannot be made until after July 1, 2026 when those funds have been released.

BID EVALUATION CRITERIA:

Contractor selection on this project will be evaluated based on the following:

1. Price.
2. Contractor reputation in providing quality materials, installation and service of work with current customers or past performance with Pocatello/Chubbuck School District 25. (Please list all jobs/contracts greater than \$50,000 performed in the past two years if contractor has not performed one for the District in past 5 years).
3. Vendor ability to best match the listed criteria as specified.

The contract will be awarded to the lowest responsive and responsible bidder or bid/offer most advantageous to the District with price and other factors considered.

BASIS OF PAYMENT

The accepted quantity of this item will be paid for at the contract price per unit completed as called for on the proposal sheet, which price shall be full compensation for the furnishing of all materials, labor, equipment, tools, or any other work necessary to complete this item in conformance with the plans and these specifications or as directed by the Facilities Coordinator.

DELIVERY AND START OF WORK:

Work can begin as soon as possible after June 9, 2026 and be completed no later than July 31, 2026.

BID:

The following universal specifications are being used as a guideline. Alternate bids for equal equipment will be considered. Substitutions or major alternations must be indicated upon the proposal sheet at the time of the bid submission. Bids must be based upon conditions at the site and these specifications. Bids shall be submitted in accordance with the requirements shown on the bid form.

REQUIREMENT FOR CONCRETE REPLACEMENT OF SIDEWALKS, DRIVEWAYS, AND CURB AND GUTTER, THE RIGHT OF WAY

PRELIMINARY REQUIREMENTS

1. Submit a plan and traffic control plan to the City Building Department, if applicable. (The plans must be approved by both the Engineering and Traffic Departments before the permit is issued.)
2. Obtain permit from the City Building Department.
3. Be familiar with these requirements.
4. Contact the concrete suppliers for conformance with the mix design specs and for slump and air testing of each load of concrete. Also, have the supplier prepared to certify the results. See forms 1 & 2 that are included in the requirements.
5. If construction staking is needed, contact the City Engineering Department and set up a schedule. A two-week Notification is needed to program the work and prevent contractor delays.
6. Contractor is responsible for the cost of any permits, testing, surveying or engineering needed.

CONSTRUCTION REQUIREMENTS

1. Set up the traffic control in conformance with the Traffic Control Plan and call the City Traffic Department for approval at telephone no. 234-6194.
2. Remove all old concrete debris, etc. and haul away, leaving the job ready for new construction.
3. Set up forms, furnish, and install compact subbase and base.
4. Call the concrete supplier (Ready Mix) and order City approved mix. Make arrangements to have the slump and air tests taken before the placement is made.
5. "Pour," Finish, Stamp, Seal, fill out forms and return to the Maintenance Department.
6. Backfill with dirt, sod or asphalt that was removed or disturbed during concrete replacement. If the demo is abutted to asphalt, the asphalt shall be saw cut and the appropriate base material place (4 inches) and compacted prior to replacing the asphalt with hot asphalt mix. Cold mix asphalt will not be accepted.
7. All asphalt and concrete saw cutting shall be incidental to the bid. No extra compensation will be provided by the owner.
8. Concrete shall be protected from vandalism till the concrete is able to be walked on, concrete shall be replaced where the vandalism took place at no cost to the owner.
9. All hand-rails shall be ADA approved, primed and painted.

CONCRETE REQUIREMENTS FOR CURBS, GUTTERS, SIDEWALKS, AND STAIRWAYS

1. Reference the Idaho Standards for Public Works Construction latest edition as governing all work in the right of way, along with specific project plans and with the exceptions or additions as herein noted or detailed on the Plans. The CONTRACTOR shall take special note of "Section 100 General Conditions" and "Section 700 Concrete Construction" (more specifically 702). Hereafter the above-mentioned specifications book shall be written as ISPWC. A copy of the ISPWC specifications can be obtained at the City Engineer's Office, 911 N. 7th, Pocatello, Idaho.
2. Reference the following publications/codes as applicable, governing all stairway related work (Site Preparation, Formwork, Reinforcement, Concrete Placement, Finishing, Curing, Quality or detailed. Use accompanying drawings for guidelines only.
 - A. ACI 301 - Structural Concrete for Buildings.
 - B. ACI 302 - Recommended Practice for Concrete Floor and Slab Construction.
 - C. ACI 308 - Standard Practice for Curing Concrete.
 - D. ACI 318 - Building Code Requirements for Reinforced Concrete.
 - E. ACI 347 - Recommended Practice for Concrete Formwork.
 - F. ANSI/ASTM A185 - Welded Steel Wire Fabric for Concrete Reinforcement.
 - G. CRSI - Concrete Reinforcing Steel Institute - Manual of Practice.
 - H. CRSI 63 - Recommended Practice for Placing Reinforcing Bars.
 - I. CRSI 65 - Recommended Practice for Placing Bar Supports, Specifications and Nomenclature.
 - J. ACI SP-66
 - K. ASTM A6615
 - L. ANSI/ASTM A82
 - M. ASTM A767
3. The CONTRACTOR shall be responsible for notifying, by mail or in person; all business and all property owners affected by the proposed construction a minimum of 72 hours before beginning any work. Additional notice of road closures or other major inconveniences created by construction activity must be made on timely basis to emergency services and appropriate news media and to those property and business owners affected.
4. Concrete batch plants are to have NRMCA (National Ready Mix Concrete Association) certification and be on the State of Idaho Transportation department's approved list. Forms #1 and #2 must be completed for each job or several jobs may be listed on the forms.

CONCRETE CONSTRUCTION

701.04 Proportioning (replace this section in the ISPWC to read as follows). The concrete will be designed to meet the requirements of Table 700-A, Concrete Proportioning.

TABLE 700-A

CONCRETE PROPORTIONING

Max. Aggregate Size - $\frac{3}{4}$ -inch

Min. Cement - 6.5** bags per cubic yard (611 lbs.)

Min. 28-day strength - 4000* lb. per sq. in.

Max Water cement ratio - 0.45***

Max Slump – 3-inch**** without water reducer (WATER REDUCER IS REQUIRED) for concrete with greater than a 3-inch slump.

Air Content - 6.5% \pm 1.5%

*Based on ACI-318

**Up to 15% certified fly ash may be used in the mix as a substitute for the cement.

***Water reducer (Certified by ASTM-C494) IS REQUIRED for concrete with greater than a 3-in. slump, but in no case shall the water - cement ratio exceed - 0.45.

****The maximum slump for standard water reducer shall be 4 inches. The maximum slump for Master Builders "Polyheed" shall be 6 inches.

703.05 Curing Concrete (Replace this section of the ISPWC to read as follows:

All concrete placed within the right-of-way shall be cured as specified below.

Untreated forms and existing concrete shall be kept damp for a period of not less than 15 minutes before concrete is placed therein. They shall be kept damp until covered with concrete except that adequately treated forms shall be thoroughly washed with water spray immediately prior to placing the concrete.

Impervious Membrane Curing: Contractors shall use an emulsion based, white pigmented curing system that is D.O.T approved and meets VOC requirements, such as CERTI-VEC ENVIOCURE WHITE 1315 VOC or equal. Requests for approval of other curing compounds must be supported with sufficient tests to prove that they accomplish the same results, or exceed the results, of TRI-KOTE 26 Clear White Pigmented. Membrane curing compounds shall comply with AASHTO —148. It shall be delivered to the job in the manufacturer's original container, clearly labeled to show the name of the manufacturer and the contents.

1. The material shall be ready for use as shipped by the manufacturer and no diluting will be permitted. Sampling will not be necessary if manufacturer's certification is available. The curing compound shall be applied under pressure with a spray nozzle as per manufacturer's recommendation. The application of the curing compound shall be applied immediately after the finishing operations have been completed to the satisfaction of the Engineer.
2. If it is necessary to allow workmen, wheelbarrows, concrete buggies and the like on the surface before the seven-day curing period is complete, the top surface of the sealed concrete shall be covered with a protective cushion for runways. This cushion shall consist of a moist one-inch minimum thick layer of fine sand or at least two layers of moist burlap, and then the approved cushion shall be covered with four foot by eight-foot sheets of three-quarter inch plywood. The cushion material shall not be placed for at least eight hours after the final application of the curing compound. Any other proposed cushion material shall be approved, in writing, by the Engineer before use. Layers of plastic, visqueen or canvas are not considered as an acceptable cushion material.
3. Cold Weather Concreting: Before any concrete is poured, all ice, snow, and frost shall be completely removed and temperature of all surfaces to be in contact with the concrete shall be raised above freezing. Concreting operations shall meet the following requirements when the ambient temperatures fall below 40 degrees F.
 - A. Concrete shall be delivered on the job with temperatures between 50 degrees F. and not more than 80 degrees F. at the time of placing.
 - B. Protection: The temperature of the concrete shall be maintained at a minimum of 50 degrees F. for 7 days or 70 degrees F. for 3 days. Where unformed surfaces are involved the temperature at the surfaces shall be maintained at the temperatures and times as listed above. The use of heaters may be required and supplied at no additional cost.
 - C. On small quantities of concrete such as sidewalks, curb and gutter, etc., the Contractor shall protect the concrete from freezing by covering the concrete with burlap, straw, earth, or other protective covering. The protective covering shall be supplied at no additional cost. Any concrete allowed to freeze before 5 days of curing time has elapsed shall be replaced at the contractor's expense.
 - D. Hot Weather Concreting: The temperature of the concrete shall not exceed 80 degrees F. at time of placement. When the air temperature, concrete temperature, humidity and wind is such that rapid evaporation of moisture from the concrete takes place, the Contractor will be required to take measures to slow evaporation. Such measures may include, but not be limited to, placing at night, early morning or erecting sun shades.

705.03 Subgrade and Base Preparation (Replace this section of the ISPWC to read as follows.)

NOTE: The silt in our area (Pocatello) is very “fragile”. When saturated with water in place, it can “collapse” or compact so that settling takes place. Also, when it is saturated with water, freezing causes great expansion forces, which produces a great amount of cracking in concrete. Therefore, the object is to keep water out of the subgrade.

Subgrade Preparation: Excavation for the construction shall be to the required depth, and the subgrade upon which the aggregate base is to be placed shall have a firm and even surface, and shall be compacted as per Section 200 of these specifications which requires 95% of maximum density as determined by AASHTO T-99.

Crushed Aggregate Base Preparation: The crushed aggregate base shall conform to the grading requirements as shown below and shall be placed to the minimum depths required as per each item’s Standard Drawing, and compaction shall be a minimum of 95% of maximum density as determined by AASHTO T-99.

Four (4) inches of crushed ¾-inch gravel (one foot in critical areas) is required under the sidewalk, driveway, curb and gutter. The gravel shall be of a drainable type with less than 4% passing the 100 sieve and 2% passing the 200 sieve. The maximum size gravel is 100% passing the 3-inch sieve.

704.05 Concrete testing and Certification (Add this item to the ISPWC Concrete Section.)

1. Concrete Certifications.

Form #1 Supplier certification for the mix design shall be completed yearly by each concrete supplier for any mixes designated for use in the right-of-way.

Following is an example of the certification for mix design. The contractor is responsible to provide to the Facilities Coordinator a certification for mix design at the beginning of the project.

CONCRETE FORM #1 SUPPLIER

CERTIFICATION FOR THE MIX DESIGN

I certify that the mix design for the concrete supplied meets or exceeds the City of Pocatello's requirements. Namely: (for ¾-inch max. aggregate)

Min. Cement - 6.5 bags per cubic yard (611 lbs.)

Min. 28-day strength - 4000 lb. per sq. in.

Water cement ratio - .45 max.

Slump – 3-inch max. without water reducer (WATER REDUCER IS REQUIRED) for concrete with greater than a 3-inch slump; 4 inch maximum with standard water reducer and 6-inch maximum with Master Builders "polyheed".

Air Content - 6.5% ± 1.5%

Other sections of the Idaho Standards for the Public Works Construction as pertaining to the mix.

The mix design is attached for the year _____or_____.

I understand that if this mix design is misrepresented that I may be barred from future work relating to the City of Pocatello's right-a-way.

Company Name: _____

Signature: _____

Date: _____

All areas are shown on plan sheet, dimensions are approximate and not intended to be precise. In order to reduce or eliminate change orders, it will be necessary for the bidder to complete field verification of site and dimensions.

Project No. 1 – Education Service Center

This project is to replace the concrete loading dock and stairway for the warehouse and west loading dock stairway for the kitchen. It will be a design build and shall include:

- a. Removal and disposal of existing dock, stairs and materials.
- b. Removal and replacement of base material.
- c. New footings appropriate to application.
- d. Pour new foundation walls.
- e. Fill and compact interior of fountain walls with new material.
- f. Pour new cap for dock.
- g. Install new truck loading ramp on east side half of dock.
- h. Add rubber bumpers to west half of dock.
- i. New railings on stairways and on east and west sides of dock area.
- j. All permits and inspections associated with this project.
- k. Design drawings to be turned in with bid forms.

Project No. 2 – Greenacres Elementary School

This project is to recap the entry stairs for door #6 and shall include:

- a. Removal and disposal of existing stairs.
- b. Installation of new concrete stairs.
- c. Removal and reinstallation of hand rails down both sides of new stairs.
- d. All permits and inspections associated with this project.

REQUEST FOR QUOTATION

Date	Address Reply To:	Reply Due By:
March 20, 2026	Jolene Smith Business Operations RE: Concrete Replacement – Various District Buildings 3115 Pole Line Rd Pocatello, ID 83201	April 7, 2026 9:00 AM
Project	Description	Unit Price
1	EDUCATION SERVICE CENTER -- Replace the concrete loading dock and stairway for the warehouse and west loading dock stairway for the kitchen.	
2	GREENACRES ELEMENTARY SCHOOL -- Recap the entry stairs for door #6.	
	TOTAL BID	

Work to be accomplished between June 9, 2026 and July 31, 2026.

The School Board of Trustees reserves the right to reject any or all bids, likewise, to reject any item or items in any such bids and the right to waive any technicality.

We, the undersigned, propose to furnish all labor, materials, tools, and equipment and complete all work called for by these specifications in connection with Entry Door Replacement at Various Buildings, under the supervision of the School Plant Coordinator and the Director of Business Operations.

Respectfully submitted,

- Attached, if applicable, is a listing of sub-contractor’s names and addresses for this project.
- Attached is our Affidavit of Alcohol and Drug-Free Worksite, as pursuant to Idaho Code 72-1717.
- Attached is Bidder Certification Form.

Company Name

Authorized Signature / Date

Address

Title

City, State, Zip

Public Works License Number

Phone / Fax Number

Worker’s Comp & Liability Insurance Exp. Date

CONTRACTOR'S AFFIDAVIT
CONCERNING ALCOHOL AND DRUG-FREE WORKPLACE

STATE OF _____

COUNTY OF _____

Pursuant to the Idaho Code, Section 72-1717, I, the undersigned, being duly sworn, depose and certify that named contractor is in compliance with the provisions of Idaho Code section 72-1717; that named contractor provides a drug-free workplace program that complies with the provisions of Idaho Code, title 72, chapter 17 and will maintain such program throughout the life of a state construction contract and that named contractor shall subcontract work only to subcontractors meeting the requirements of Idaho Code, section 72-1717(1)(a).

Name

Authorized Signature / Date

Subscribed and sworn to before me this _____ day of _____, 2026.

Commission expires:

NOTARY PUBLIC, residing at

BIDDER CERTIFICATION FORM

1. **Debarment and Suspension** – In submitting this bid proposal, we hereby certify that we have not been suspended or in any way excluded from Federal procurement actions by any Federal Agency. We fully understand that if information contrary to this certification subsequently becomes available, such evidence may be grounds for non-award or nullification of a bid contract.
2. **Anti-Collusion** – In submitting this bid proposal, we hereby certify this proposal was developed and prepared without any collusion with any competing bidder or District employee. The content of this proposal has not been disclosed to any competing or potentially competing bidder prior to the proposal due date and time. Furthermore, no action to persuade any person, partnership or corporation to submit or withhold a bid has been made.
3. **Anti-Lobbying** – In submitting this bid proposal, we hereby certify that to the best of our knowledge and belief, no appropriated Federal funds have been paid or will be paid by or on behalf of person associated with this proposal to any person for influencing or attempting to influence and officer or employee of any agency, a member of Congress, an office or employee of Congress or an employee of a member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement and the extension, continuation, renewal, amendment or modification of any Federal contract, grant, loan or cooperative agreement.
4. **National Sexual Offender Registry** – In submitting this bid proposal, you certify to the District that your company will prohibit any persons in your employ who are registered or required to register under the Idaho Sex Offender Registration Act from participation in company business with the District if such participation would require them to be present on school property. You certify further that you have cross checked such employees against the National Sex Offender Registry found at the following web link: <http://www.nsopr.gov/>


Signed: _____ Date: _____

Name & Title: _____

Company: _____ Phone: _____

Address: _____

City/State/Zip: _____

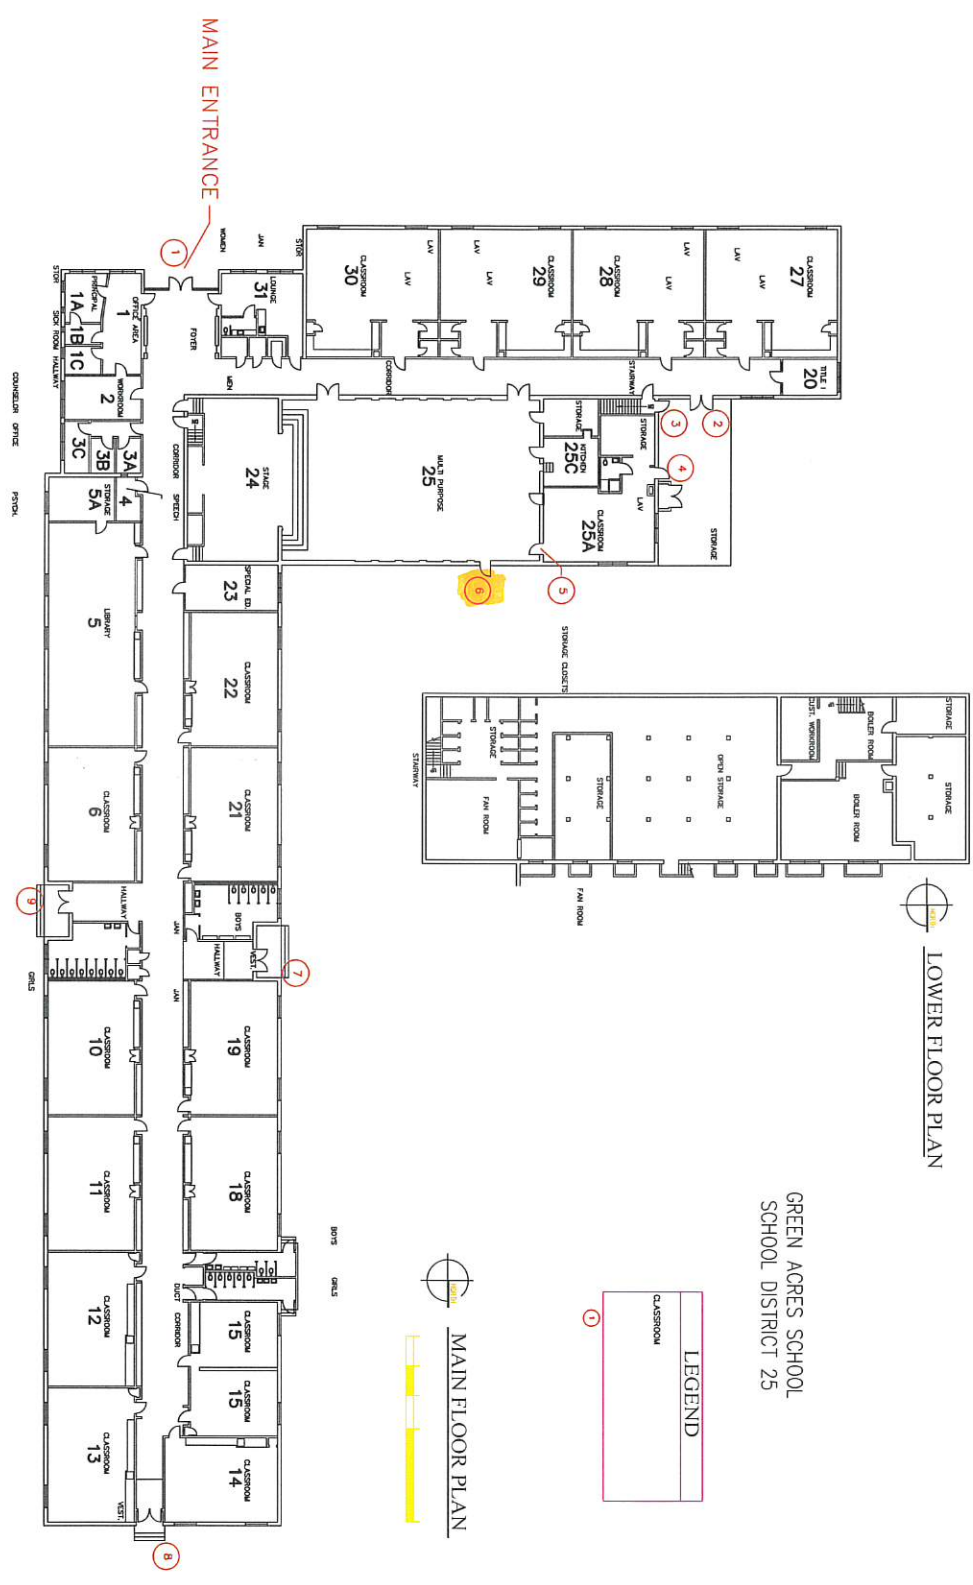

Stairway

GREEN ACRES SCHOOL
SCHOOL DISTRICT 25

LEGEND	
	CLASSROOM

MAIN FLOOR PLAN

LOWER FLOOR PLAN

BILL OF MATERIALS:

<u>DESCRIPTION</u>	<u>QTY</u>	<u>SPECIFICATIONS</u>
Mechanical Edge of Dock	1	72"W 30K Capacity 60" Extension Handle

