

Addendum No.: 2**Date Of Addendum: 4/15/2026**

**Underground Storage Tank Replacement at Harwinton Consolidated School
115 Litchfield Road, Harwinton, CT 06791
State Project 210-0037CVOT**

Original Bid Due Date / Time:**4/21/2026****12:00PM****Previous Addendums: Addendum 1****TO: Prospective Bid Proposers:**

This Addendum forms part of the "Contract Documents" and modifies or clarifies the original "Contract Documents" for this Project dated 6/9/2025. Prospective Bid Proposers shall acknowledge receipt of the total number the Addenda issued for this Project on the space provided on Section 00 21 13 Bid Form.

Failure to acknowledge receipt of the total number the Addenda issued for this Project on the space provided on Section 00 21 13 Bid Form shall subject Bid Proposers to disqualification.

The following clarifications are applicable to drawings and specifications for the project referenced above.

Item 1:

Clarification: Aboveground storage tank installation includes a submersible pump as detailed in the mechanical schedule. Basis of design is ¾ hp Red Jacket submersible turbine pump model P75U1, capable of 10 gpm at 37 psi.

Item 2:

Question: Is the use of Megapress allowed?

Response: No. Threaded or welded connections are required for this project. No threaded connections are to be located underground or in inaccessible locations.

Item 3:

Question: Is the above ground pipe from tank to the transition sump Doublewall? If it is doublewall are we using FRP?

Response: Double-walled FRP may be used for the aboveground piping. A manufacturer-approved UV-resistant exterior coating or jacketing should be applied to all exposed piping.

Item 4:

Scope Change: Due to extended lead times, RSD-10 intends to purchase the base-bid daytank and return pumpset from Pryco prior to issuing a contract with the selected contractor. Attached is the quote from Pryco indicating parts included with this equipment. Please removed this purchase from your scope.

See updated drawing M-101.


End of Addendum 2

File: J:\DWG\IP2024\1534\A11\MEP\Mechanical\2024\1534.A11_M101.dwg Layout: M-101 Plotted: 2026-04-15 2:18 PM Saved: 2026-04-02 4:19 PM User: Jennifer.Thurber

PC3: NONE STB/CTB: FO STB

LAYER STATE:

MS VIEW:

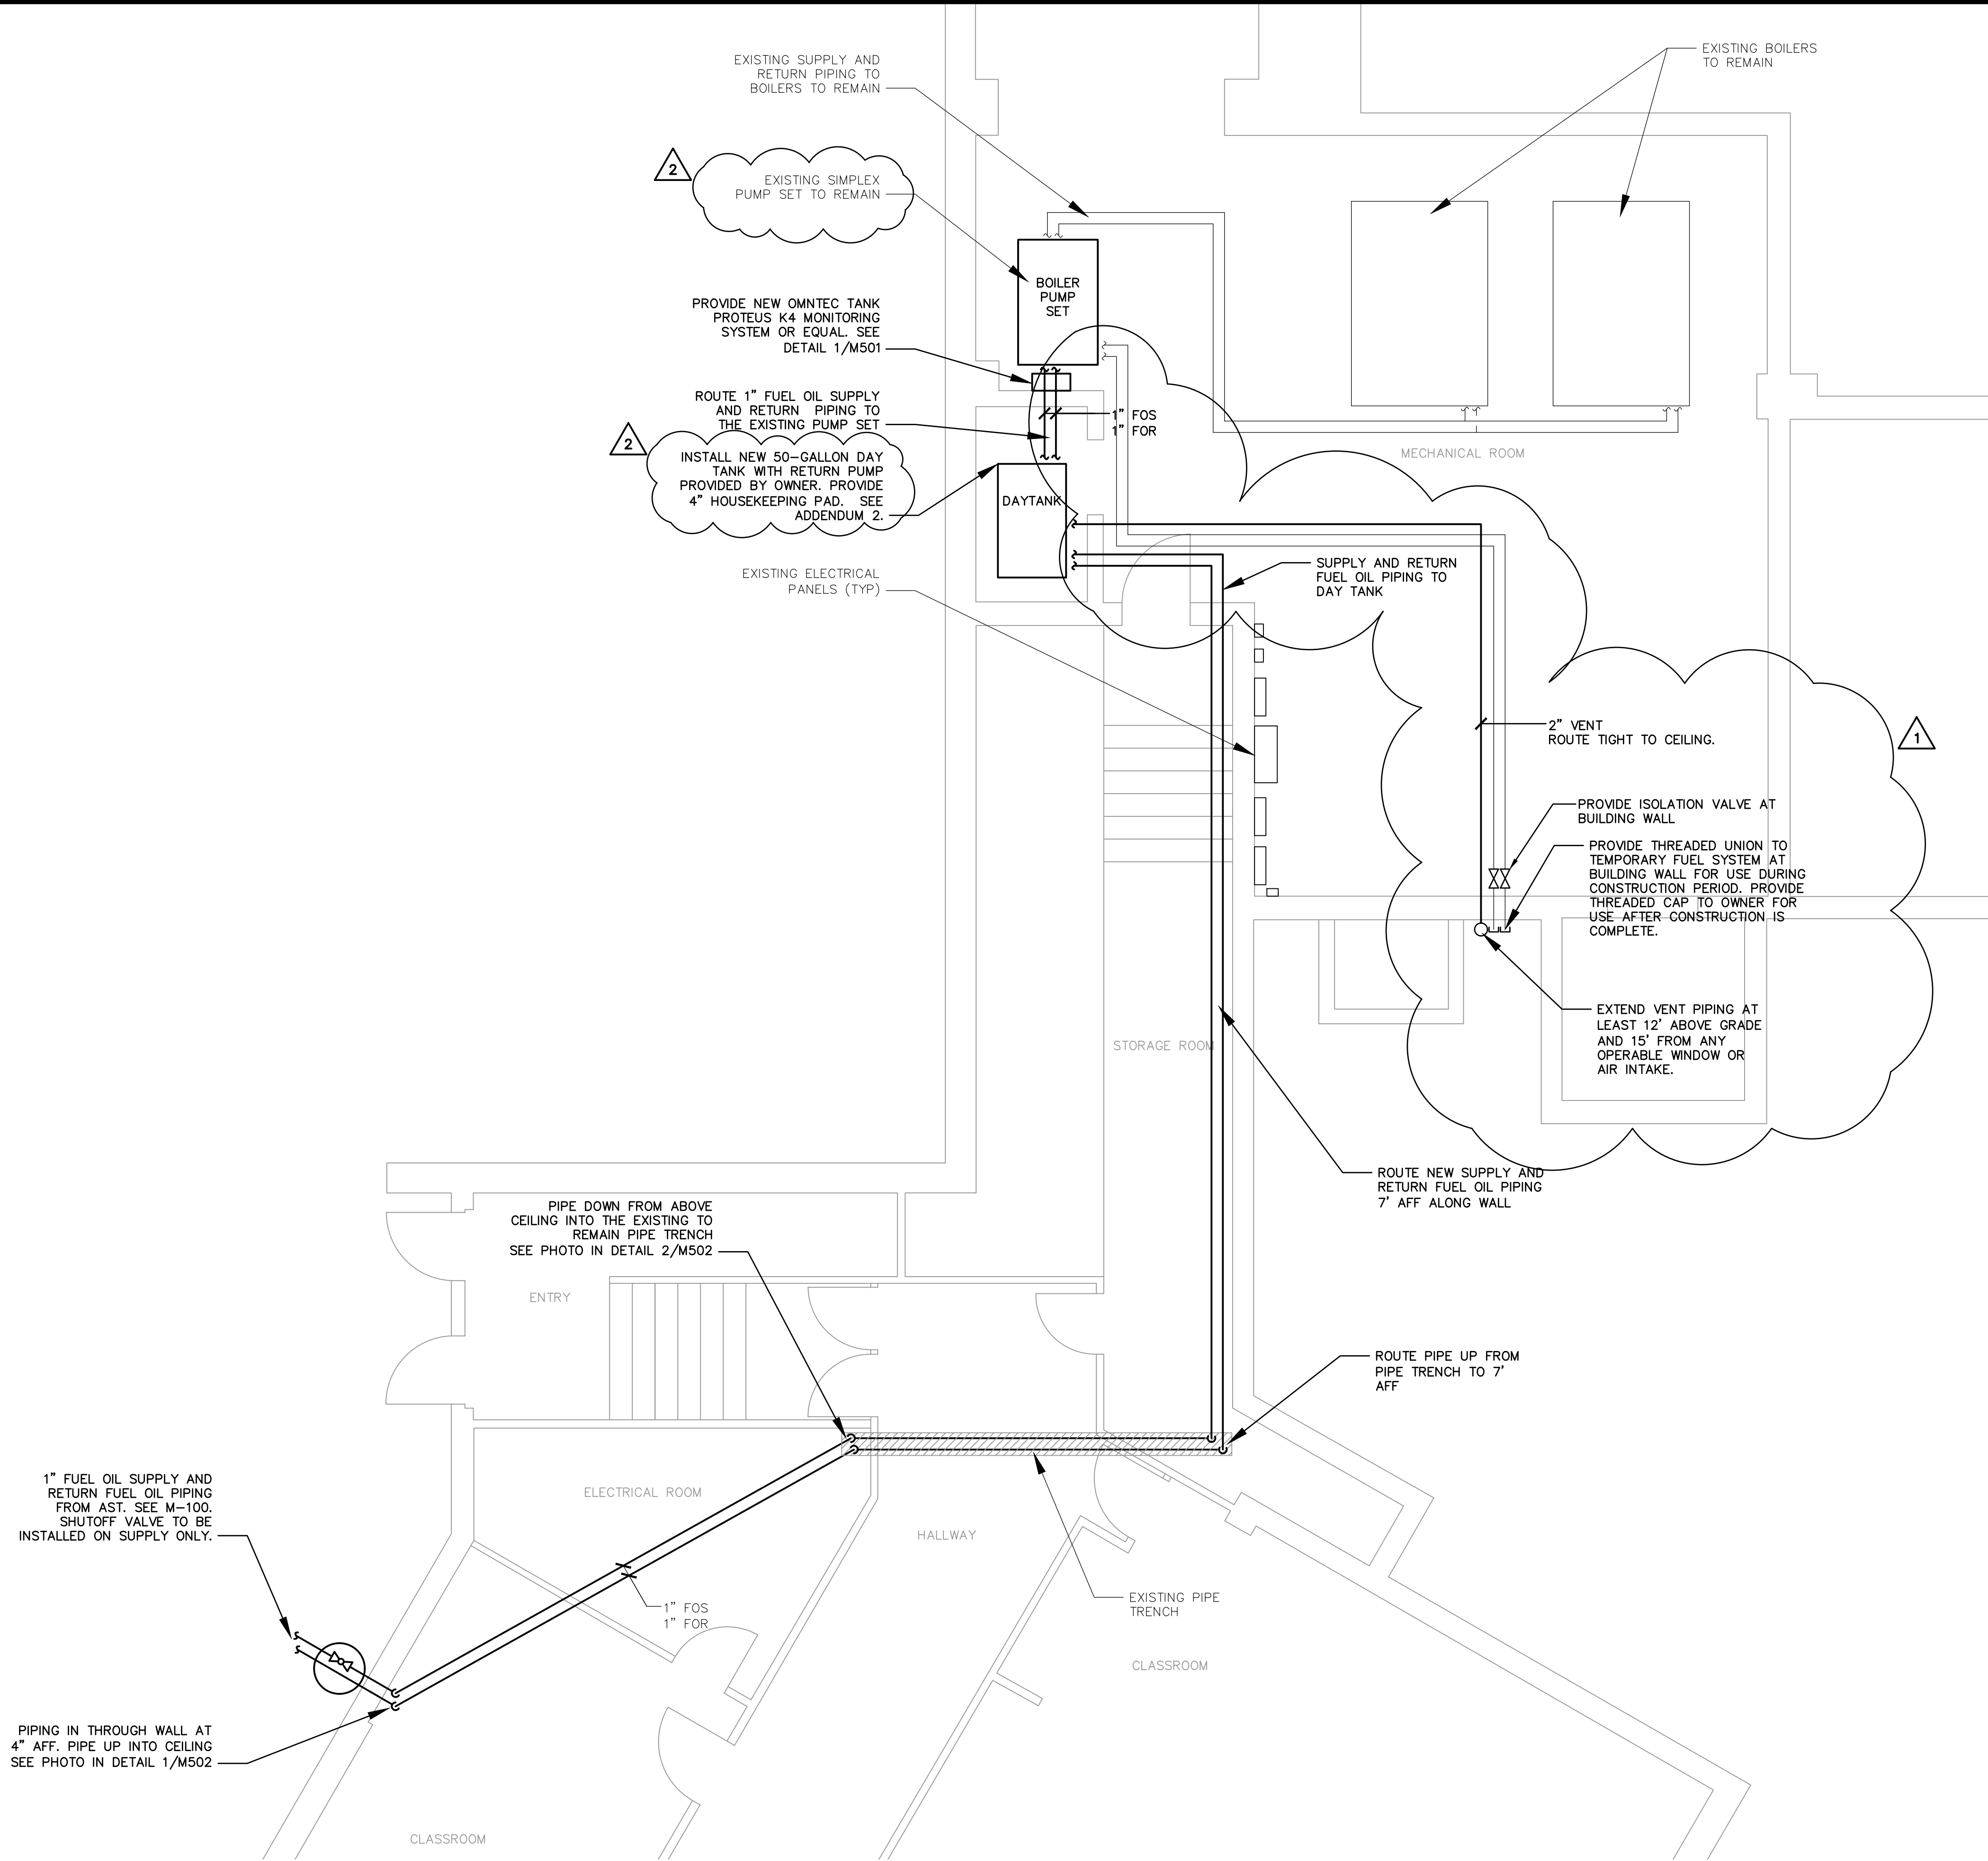

1 KEY PLAN
NOT TO SCALE

LINETYPE LEGEND

---	EXISTING TO REMAIN
----	DEMOLITION
---	NEW WORK

1 FIRST FLOOR NEW WORK PLAN
SCALE: 1/4" = 1'-0"

PERMIT SET

SCALE: 1/4" = 1'-0"	
HORZ.: 1/4" = 1'-0"	VERT.: 1/4" = 1'-0"
DATUM:	
HORZ.: 1/4" = 1'-0"	VERT.: 1/4" = 1'-0"
0' 2' 4' 8'	GRAPHIC SCALE
FUSS & O'NEILL ONE FINANCIAL PLAZA, 15th FLOOR HARTFORD, CT 06103 860.446.2468 www.foss.com	
REGIONAL SCHOOL DISTRICT 10 MECHANICAL FIRST FLOOR NEW WORK PLAN HARWINTON CONSOLIDATED SCHOOL UST REPLACEMENT	CONNECTICUT
HARWINTON	
PROJ. No.: 20241534.A11 DATE: 06/9/2025	
M-101	
DESIGNER REVIEWER 4/15/2026 4/10/2026 2 1 ADDENDUM 2 ADDENDUM 1 No. DATE	



PRYCO, INC.
P. O. Box 108
Mechanicsburg, IL 62545

QUOTATION

Telephone: (217) 364-4467
Fax: (217) 364-4494

QUOTE DATE: **March 13, 2026**

PRYCO, INC.
P. O. BOX 108
MECHANICSBURG, IL 62545

QUOTE NUMBER

QU91913

REFERENCE

REGIONAL SCHOOL DIST- BII

TERMS

PREPAY

F.O.B.

FACTORY

PAINT COLOR

PRYCO GRAY

CARRIER

BEST WAY

APPROX LEAD DAYS*

70 (See Below)

QTY	PROD / OPT CODE	DESCRIPTION
1	PY50ULDW	DAY TANK - STANDARD - 50 Gal., U/L Listed, Double Wall SUPPLY / RETURN FUEL SYSTEM CONTROL VOLTAGE - 120vac DRY CONTACTS THIS TANK IS FOR INDOOR USE ONLY SYSTEM TO SIGNAL PRYCO PUMPSET ON QU91914
1	201	PILOT LIGHT - Spare Red Alarm Light RETURN PUMP ACTIVATED ALARM
1	201R	REMOTE SIGNAL PROVISION - For Opt #201 (10amp., Dry Contacts)
1	210	ALARM, COMBINATION - High / Low Fuel Level
1	211	ALARM RELAY - For Remote Signal Of Opt. #210
1	217LAG	FLOAT SWITCH - LAG - Standard Tank
1	223	ALARM HORN - Nema3/4/12 - Indoor Or Outdoor FOR RETURN PUMP ACTIVATE ALARM
1	242	ALARM SILENCE SWITCH - Resets Only The Audible Alarm
1	295	LEAK DETECTOR - DOUBLE WALL - Alarm & P/M Shut Down
1	323A	VENT KIT W/CAP(S) & FITTING(S) - Double Wall - 2" NPT
1	355B	CHECK VALVE - Pump Intake, 1" NPT RETURN
1	360B-120	SOLENOID VALVE - N/C - 1" NPT, 120vac
1	399-1-10	REVERSE FLOW CONTROLS & PIPING - 1" Plumbing
1	403V REV	PUMP - DUCTILE IRON - 10 GPM REVERSE FLOW - BI ROTATIONAL
1	456REVA	MOTOR - 3 PHASE - 3/4 HP, 230vac, 60 HZ Tefc C-Face RETURN

* Lead Days May Vary - Approximate Delivery Date Will Be Assigned At Time Of Order
FREIGHT NOT INCLUDED
Prices Shown and Payment Shall Be In U.S Dollars

CONTINUED NEXT PAGE



PRYCO, INC.
P. O. Box 108
Mechanicsburg, IL 62545

QUOTATION

Telephone: (217) 364-4467
Fax: (217) 364-4494

QUOTE DATE: **March 13, 2026**

PRYCO, INC.
P. O. BOX 108
MECHANICSBURG, IL 62545

QUOTE NUMBER

QU91913

REFERENCE

REGIONAL SCHOOL DIST- BII

TERMS

PREPAY

F.O.B.

FACTORY

PAINT COLOR

PRYCO GRAY

CARRIER

BEST WAY

APPROX LEAD DAYS*

70 (See Below)

QTY	PROD / OPT CODE	DESCRIPTION
1	544	ENCLOSURE - Control Panel, NEMA-1
<i>Thank you for the opportunity to submit this quote...</i> <i>We look forward to your business!</i> All purchases are subject to Pryco terms and conditions. THIS QUOTATION IS VALID FOR 15 DAYS.		

* Lead Days May Vary - Approximate Delivery Date Will Be Assigned At Time Of Order

FREIGHT NOT INCLUDED

Prices Shown and Payment Shall Be In U.S Dollars



PRYCO, INC.
P. O. Box 108
Mechanicsburg, IL 62545

QUOTATION

Telephone: (217) 364-4467
Fax: (217) 364-4494

QUOTE DATE: **March 13, 2026**

PRYCO, INC.
P. O. BOX 108
MECHANICSBURG, IL 62545

QUOTE NUMBER

QU91914

REFERENCE

REGIONAL SCHOOL DIST- BII

TERMS

PREPAY

F.O.B.

FACTORY

PAINT COLOR

PRYCO GRAY

CARRIER

BEST WAY

APPROX LEAD DAYS*

70 (See Below)

QTY	PROD / OPT CODE	DESCRIPTION
1	PYPS2210	PUMP SET - Duplex Pump/Motor 1" (Requires Enclosure) NOTE: SIGNALLED BY PY50ULDW ON QU91913
1	295	LEAK DETECTOR - DOUBLE WALL - Alarm & P/M Shut Down
1	295	LEAK DETECTOR - DOUBLE WALL - Alarm & P/M Shut Down
2	313-2	COMPOUND GAUGE - Pump Pressure & Vacuum, 2" Dial
2	314-YB	FUEL STRAINER - "Y" TYPE - 1" NPT, 20 Mesh (Ship Loose)
1	338F	ENCLOSURE - PUMP SET - Floor Mount, NEMA-1, Duplex Pump
2	355B	CHECK VALVE - Pump Intake, 1" NPT
4	369B	ISOLATION VALVE - Manual, 1" Quarter Turn (Installed)
2	379_PS_10	PRESSURE RELIEF VALVE - Inline Bypass - 50psi, 1"
2	401V	PUMP-DUCTILE IRON - 4 GPM - SUPPLY - BI ROTATIONAL
1	427A-CTLONLY	CONTROLS ONLY, LESS P/M & F/S - Auto Transfer Switch & Pump H.O.A. Switch
2	433A	MOTOR - 3 PHASE - 1/3 HP, 230vac, 60 HZ
2	PART-1238	GAUGE, DIAL - 2.5", 0-160psi, 1/4" Npt,
1	PART-1723	BOX, ENCLOSURE - 20" x 16" x 6", Nema 1 (B/P #2253)
1	PART-2253	BACK PLATE - 16" x 20" (For Part 1723 & 2377) EXCEPTION TO: BRONZE PUMPS EXCEPTION TO: 60 MESH STRAINER

Thank you for the opportunity to submit this quote...

We look forward to your business!

All purchases are subject to Pryco terms and conditions.

THIS QUOTATION IS VALID FOR 15 DAYS.

* Lead Days May Vary - Approximate Delivery Date Will Be Assigned At Time Of Order

FREIGHT NOT INCLUDED

Prices Shown and Payment Shall Be In U.S Dollars